



FCC RADIO TEST REPORT

FCC ID : GZ5NVG558HX
Equipment : Fixed Broadband Gateway
Brand Name : ARRIS
Model Name : NVG558HX
Applicant : Arris
2500 Walsh Ave. Santa Clara, California
95051, United States
Manufacturer : Arris
101 Tournament Drive, Horsham PA, 19044
Standard : FCC 47 CFR Part 2, 90(R)

The product was received on Sep. 11, 2020 and testing was started from Sep. 14, 2020 and completed on Oct. 04, 2020. We, Sporton International (USA) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA-603-E and has been in compliance with the applicable technical standards.

The test results in this partial report apply exclusively to the tested model / sample. Without written approval of Sporton International (USA) Inc., the test report shall not be reproduced except in full.

Approved by: Neil Kao

Sporton International (USA) Inc.
1175 Montague Expressway, Milpitas, CA 95035



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	5
1.3 Testing Site.....	5
1.4 Applied Standards	5
2 Test Configuration of Equipment Under Test	6
2.1 Test Mode.....	6
2.2 Connection Diagram of Test System.....	6
2.3 Support Unit used in test configuration and system	7
2.4 Frequency List of Low/Middle/High Channels	7
3 Conducted Test Items.....	8
3.1 Conducted Output Power Measurement and ERP	8
4 Radiated Test Items	9
4.1 Measuring Instruments	9
4.2 Radiated Spurious Emission	11
5 List of Measuring Equipment.....	12
6 Uncertainty of Evaluation.....	13
Appendix A. Test Results of ERP and Radiated Test	
Appendix B. Test Setup Photographs	



History of this test report

Report No.	Version	Description	Issued Date
FG190926002-04B	01	Initial issue of report	Oct. 07, 2020

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
-	§2.1046	Conducted Output Power	-	See Note
3.1	§90.542 (a)(7)	Effective Radiated Power	Pass	-
-	-	Peak-to-Average Ratio	-	See Note
-	§2.1049	Occupied Bandwidth	-	See Note
-	§2.1053 §90.543 (e)(2)	Conducted Band Edge Measurement	-	See Note
-	§2.1051 §90.210 (n)	Emission Mask	-	See Note
-	§2.1053 §90.543 (e)(3)	Conducted Spurious Emission	-	See Note
-	§2.1055 §90.539 (e)	Frequency Stability Temperature & Voltage	-	See Note
-	§90.542 (a)(7)	Effective Radiated Power	-	See Note
4.2	§2.1053 §90.543 (e)(3) §90.543 (f)	Radiated Spurious Emission	Pass	Under limit 17.20 dB at 1577.000 MHz

Note: The module (Model: EM12-G) makes no difference after verifying output power, this report reuses test data from the module report.

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Product Feature of Equipment Under Test

LTE

Product Specification subjective to this standard	
Antenna Type	Fixed External Antenna / Fixed Internal Antenna

1.2 Modification of EUT

No modifications are made to the EUT during all test items.

1.3 Testing Site

Test Site	Sporton International (USA) Inc.	
Test Site Location	1175 Montague Expressway, Milpitas, CA 95035 TEL : 408 9043300	
Test Site No.	Sporton Site No.	
	TH01-CA	03CH01-CA
Test Engineer	Andy Kao	Janssen Wongso and Peter Liao
Temperature	23.5~23.6°C	21~25°C
Relative Humidity	44.1~44.6%	52~56%

Note: The test site complies with ANSI C63.4 2014 requirement.

1.4 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ FCC 47 CFR Part 2, Part 90(R)
- ♦ ANSI / TIA-603-E
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test


2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.

Conducted Test Cases	Band	Bandwidth (MHz)						Modulation			RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	64QAM	1	Half	Full	L	M	H
E.R.P	14	-	-	V	V	-	-	V	V		V			V	V	V
Radiated Spurious Emission	14			V	V			V			V			V	V	V
Remark	1. The mark "V" means that this configuration is chosen for testing 2. The mark "-" means that this bandwidth is not supported. 3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.															

2.2 Connection Diagram of Test System

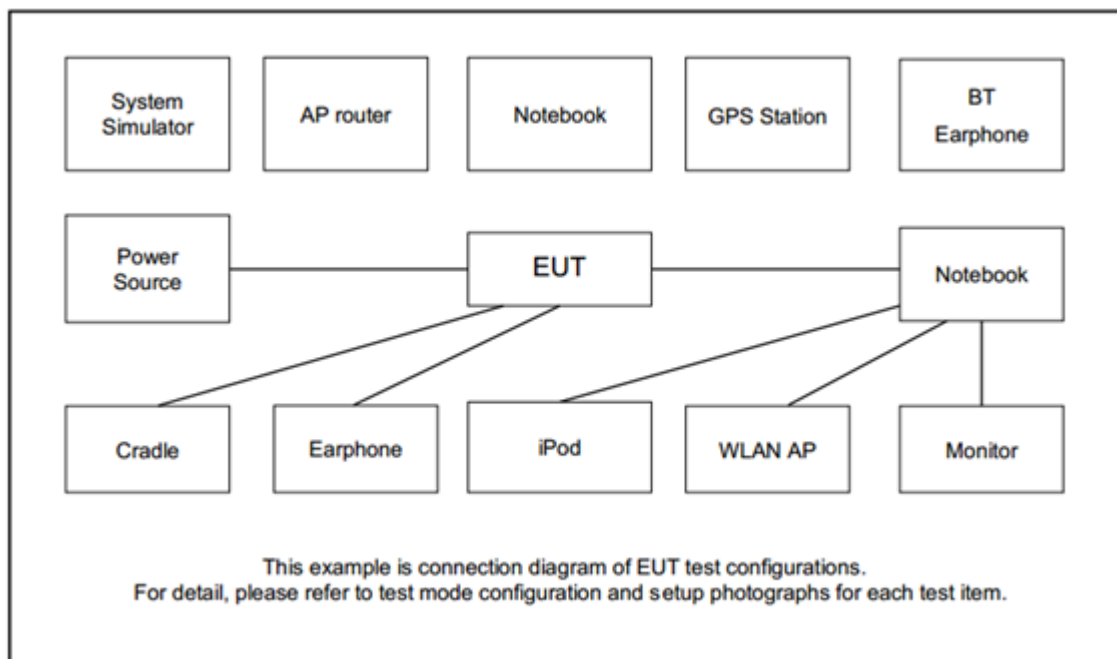



2.3 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m

2.4 Frequency List of Low/Middle/High Channels

LTE Band 14 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	-	23330	-
	Frequency	-	793	-
5	Channel	23305	23330	23355
	Frequency	790.5	793	795.5



3 Conducted Test Items

3.1 Conducted Output Power Measurement and ERP

3.1.1 Description of the Conducted Output Power Measurement and ERP Measurement

A base station simulator was used to establish communication with the EUT. Its parameters were set to transmit the maximum power on the EUT. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 3 Watts for LTE Band 14.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.1.2 Test Procedures

1. The transmitter output port was connected to base station.
2. Set EUT at maximum power through base station.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.1.1 Test Setup


For radiated test below 30MHz

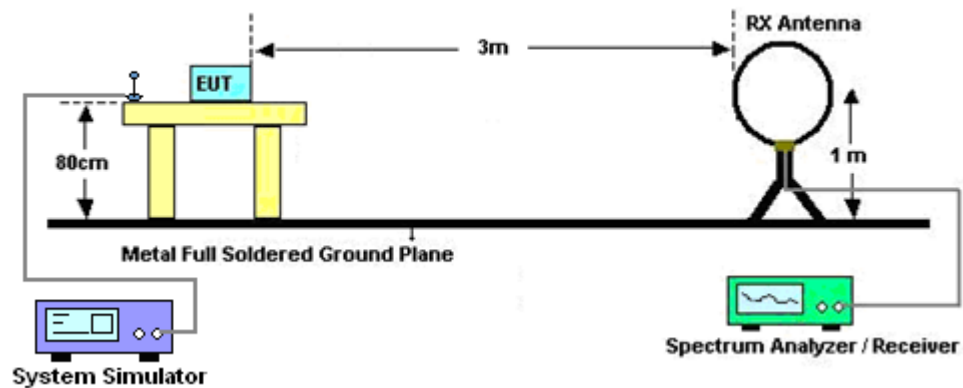

For radiated test from 30MHz to 1GHz

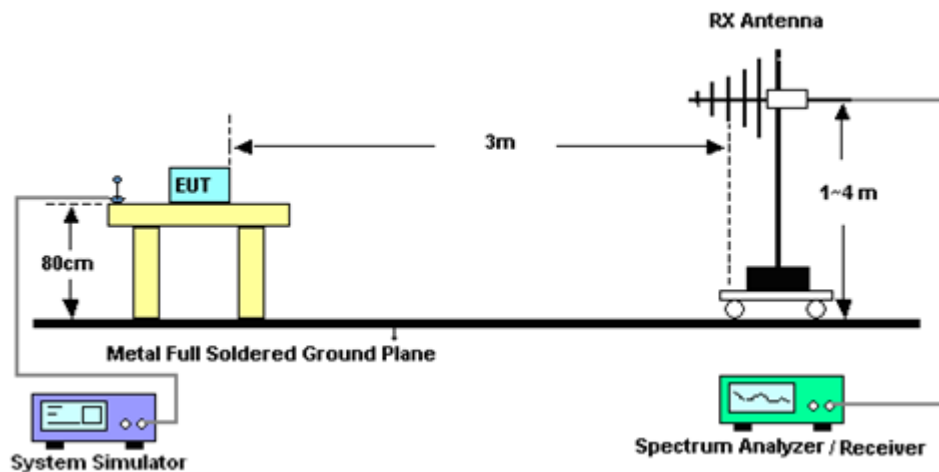

For radiated test above 1GHz

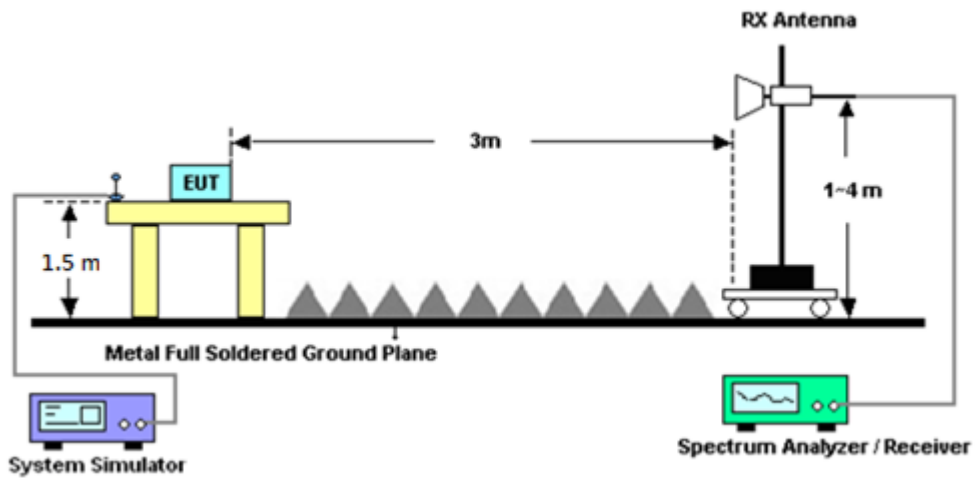

4.1.2 Test Result of Radiated Test

Please refer to Appendix A.

Note:

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

4.2 Radiated Spurious Emission

4.2.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI / TIA-603-E. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For operations in the 758-775 MHz and 788-805 MHz bands, all emissions including harmonics in the band 1559–1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.2.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 7 and ANSI / TIA-603-E Section 2.2.12.

1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, Sweep = 500ms, Taking the record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
11. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)



5 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Radio Communication Analyze	Anritsu	MT8820C	6201300652	N/A	Jul. 21, 2020	Sep. 14, 2020~ Oct. 04, 2020	Jul. 20, 2021	Conducted (TH01-CA)
Spectrum Analyzer	Rohde & Schwarz	FSV13	101559	10Hz~13.6GHz	Jun. 17, 2020	Sep. 14, 2020~ Oct. 04, 2020	Jun. 16, 2021	Conducted (TH01-CA)
Bilog Antenna	TESEQ	6111D	50391	30MHz~1GHz	Jul. 06, 2020	Sep. 14, 2020~ Oct. 04, 2020	Jul. 05, 2021	Radiation (03CH01-CA)
Horn Antenna	SCHWARZB ECK	BBHA 9120D	01894	1GHz~18GHz	Jul. 13, 2020	Sep. 14, 2020~ Oct. 04, 2020	Jul. 12, 2021	Radiation (03CH01-CA)
SHF-EHF Horn Antenna	SCHWARZB ECK	BBHA9170	00841	18GHz~40GHz	Aug. 27, 2020	Sep. 14, 2020~ Oct. 04, 2020	Aug. 26, 2021	Radiation (03CH01-CA)
Preamplifier	SONOMA	310N	372241	N/A	Jul. 28, 2020	Sep. 14, 2020~ Oct. 04, 2020	Jul. 27, 2021	Radiation (03CH01-CA)
Preamplifier	Keysight	83017A	MY53270321	1GHz~26.5GHz	Aug. 28, 2020	Sep. 14, 2020~ Oct. 04, 2020	Aug. 27, 2021	Radiation (03CH01-CA)
Preamplifier	Jet-Power	JPA0118-55-303	1710001800055004	1GHz~18GHz	Aug. 07, 2020	Sep. 14, 2020~ Oct. 04, 2020	Aug. 06, 2021	Radiation (03CH01-CA)
Preamplifier	EMEC	EMC18G40G	060725	18G-40G	Aug. 07, 2020	Sep. 14, 2020~ Oct. 04, 2020	Aug. 06, 2021	Radiation (03CH01-CA)
Spectrum Analyzer	R&S	FSV40	101545	40GHz	Jun. 26, 2020	Sep. 14, 2020~ Oct. 04, 2020	Jun. 25, 2021	Radiation (03CH01-CA)
Hygrometer	TESTO	608-H1	45142559	N/A	Aug. 05, 2020	Sep. 14, 2020~ Oct. 04, 2020	Aug. 04, 2021	Radiation (03CH01-CA)
Signal Generator	Rohde & Schwarz	SMF100A	105544	9kHz~44GHz	Jun. 09, 2020	Sep. 14, 2020~ Oct. 04, 2020	Jun. 08, 2021	Radiation (03CH01-CA)
Horn Antenna	SCHWARZB ECK	BBHA 9120D	02140	N/A	Aug. 28, 2020	Sep. 14, 2020~ Oct. 04, 2020	Aug. 27, 2021	Radiation (03CH01-CA)
Controller	Chaintek	EM-1000	060881	N/A	N/A	Sep. 14, 2020~ Oct. 04, 2020	N/A	Radiation (03CH01-CA)
Software	Audix	E3	N/A	N/A	N/A	Sep. 14, 2020~ Oct. 04, 2020	N/A	Radiation (03CH01-CA)

6 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	3.46
--	------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	3.70
--	------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	3.74
--	------

**Appendix A. Test Results of ERP and Radiated Test****ERP**

LTE Band 14 / 5MHz (Average) (GT - LC = 3.9 dB)							
Channel	Mode	RB		Conducted		ERP	
		Size	Offset	EIRP(dBm)	EIRP(W)	ERP(dBm)	ERP(W)
Lowest	QPSK	1	0	22.71	0.1866	24.46	0.2793
Middle		1	0	22.72	0.1871	24.47	0.2799
Highest		1	0	22.63	0.1832	24.38	0.2742
Lowest	16QAM	1	12	22.14	0.1637	23.89	0.2449
Middle		1	12	22.06	0.1607	23.81	0.2404
Highest		1	12	22.09	0.1618	23.84	0.2421
Limit	ERP < 3W			Result		PASS	

LTE Band 14 / 10MHz (Average) (GT - LC = 3.9 dB)							
Channel	Mode	RB		Conducted		ERP	
		Size	Offset	EIRP(dBm)	EIRP(W)	ERP(dBm)	ERP(W)
Lowest	QPSK	-	-	-	-	-	-
Middle		1	0	22.97	0.1982	24.72	0.2965
Highest		-	-	-	-	-	-
Lowest	16QAM	-	-	-	-	-	-
Middle		1	0	22.35	0.1718	24.10	0.2570
Highest		-	-	-	-	-	-
Limit	ERP < 3W			Result		PASS	

**Radiated Spurious Emission****LTE Band 14**

LTE Band 14 / 5MHz / QPSK									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Low	1577	-59.79	-42.15	-17.64	-72.77	-64.91	1.07	8.35	H
	2365	-56.09	-13	-43.09	-73.76	-62.99	1.31	10.36	H
	4741	-49.41	-13	-36.41	-74.11	-57.91	1.95	12.60	H
	1577	-59.35	-42.15	-17.20	-72.38	-64.47	1.07	8.35	V
	2365	-56.87	-13	-43.87	-74.01	-63.77	1.31	10.36	V
	4741	-50.58	-13	-37.58	-75.59	-59.08	1.95	12.60	V



LTE Band 14 / 5MHz / QPSK									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1582	-59.67	-42.15	-17.52	-72.6	-64.81	1.07	8.36	H
	2372	-56.44	-13	-43.44	-74.07	-63.35	1.31	10.37	H
	4756	-49.62	-13	-36.62	-74.36	-58.11	1.96	12.60	H
	1582	-60.17	-42.15	-18.02	-72.38	-65.31	1.07	8.36	V
	2372	-56.67	-13	-43.67	-74.01	-63.58	1.31	10.37	V
	4756	-50.47	-13	-37.47	-75.59	-58.96	1.96	12.60	V



LTE Band 14 / 5MHz / QPSK									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
High	1587	-59.70	-42.15	-17.55	-72.6	-64.85	1.08	8.38	H
	2380	-56.55	-13	-43.55	-74.14	-63.47	1.31	10.38	H
	4772	-49.46	-13	-36.46	-74.26	-57.94	1.97	12.60	H
	1587	-60.00	-42.15	-17.85	-72.18	-65.15	1.08	8.38	V
	2380	-56.78	-13	-43.78	-74.07	-63.70	1.31	10.38	V
	4772	-50.32	-13	-37.32	-75.49	-58.80	1.97	12.60	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



LTE Band 14 / 10MHz / QPSK									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1568	-59.78	-42.15	-17.63	-72.83	-64.88	1.07	8.32	H
	2352	-56.30	-13	-43.30	-74.06	-63.18	1.31	10.33	H
	3136	-55.01	-13	-42.01	-74.86	-62.88	1.51	11.53	H
	1568	-61.22	-42.15	-19.07	-73.53	-66.32	1.07	8.32	V
	2352	-56.93	-13	-43.93	-74.42	-63.81	1.31	10.33	V
	3136	-55.32	-13	-42.32	-74.89	-63.19	1.51	11.53	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.