

Co-location Report

1 TEST RESULT

1.1 Radiated Emissions Measurement

1.1.1 Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

1.1.2 Measuring Instruments and Setting

Please refer to section 2 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	100KHz / 100KHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

1.1.3 Test Procedures


1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

1.1.4 Test Setup Layout

For radiated emissions below 30MHz

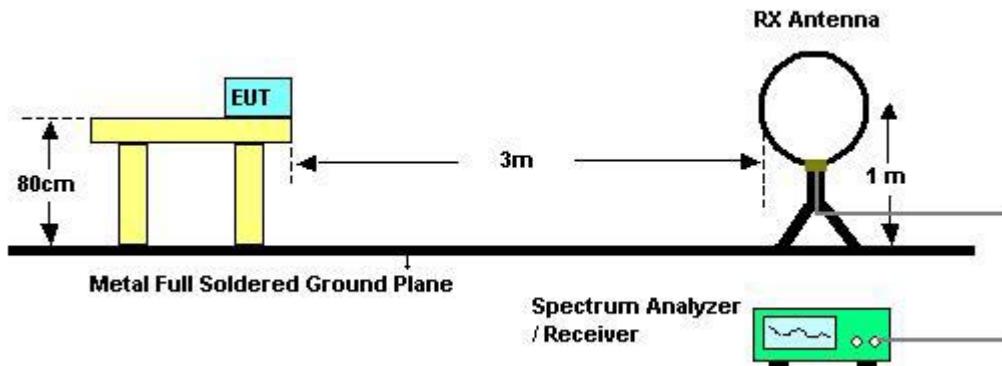

For radiated emissions above 30MHz

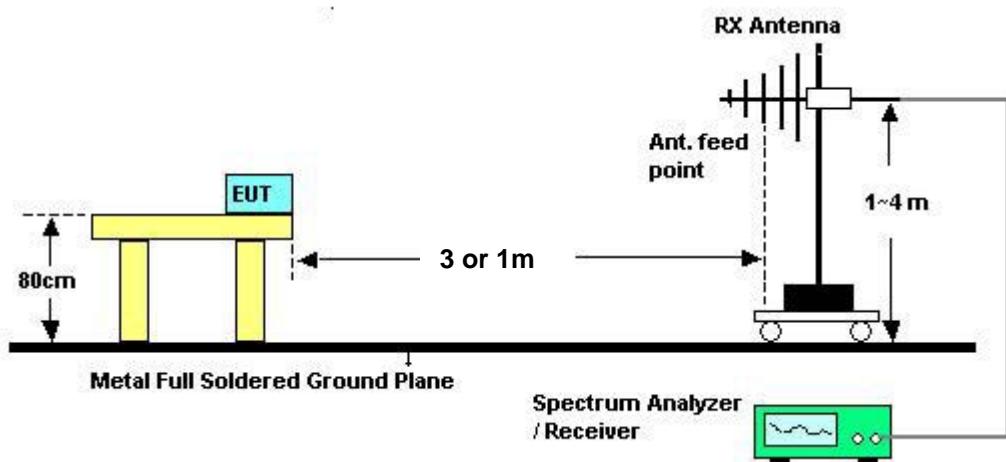

Above 10 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.

Distance extrapolation factor = $20 \log (\text{specific distance [3m]} / \text{test distance [1m]})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [9.54 dB].

1.1.5 Test Deviation

There is no deviation with the original standard.

1.1.6 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

1.1.7 Results of Radiated Emissions (9kHz~30MHz)

Test date	Nov. 17, 2008	Test Site No.	03CH03-HY
Temperature	26	Humidity	50%
Test Engineer	Eddie		

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:


The amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.


1.1.8 Results of Radiated Emissions (30MHz~1GHz)

Test date	Nov. 17, 2008	Test Site No.	03CH03-HY
Temperature	26	Humidity	50%
Test Engineer	Eddie	Configuration	802.11b CH 6 + Bluetooth CH78 Mode

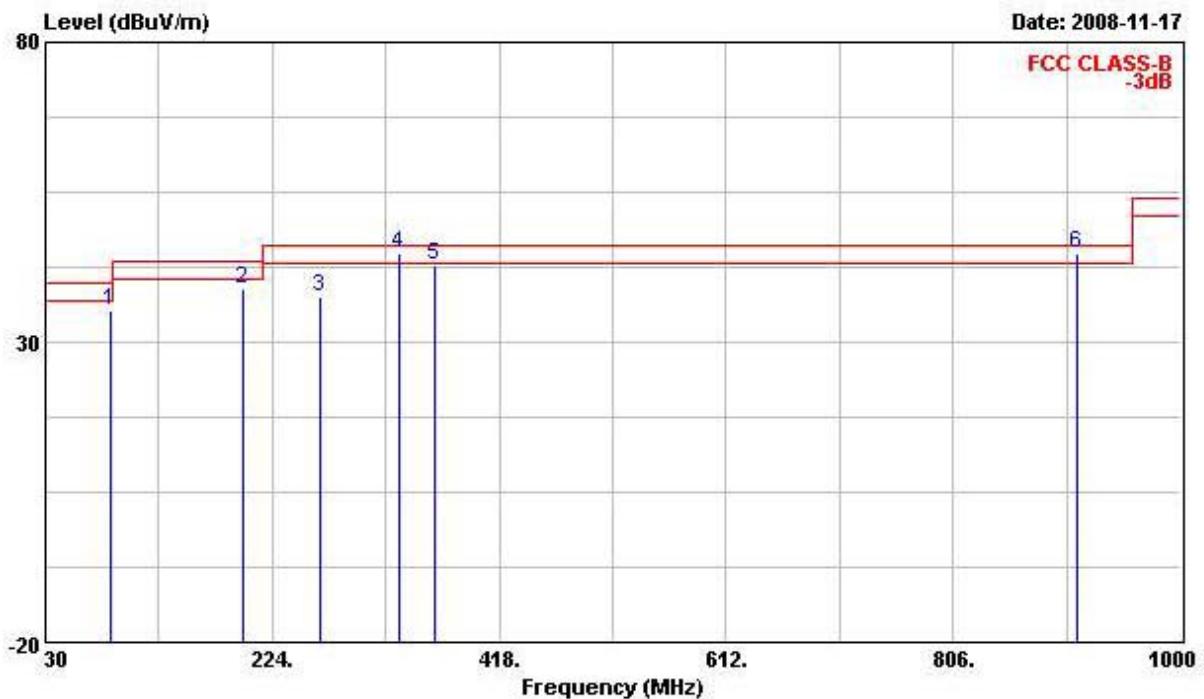Horizontal

Freq	Level	Over Limit		Read Antenna Level Factor	Cable Loss Factor	Preamp Factor	Remark
		Line	dBuV/m				
		MHz	dBuV/m				
1	86.260	35.23	-4.77	40.00	52.77	8.65	1.60 27.79 Peak
2	198.780	38.76	-4.74	43.50	54.84	9.61	2.38 28.07 QP
3	265.710	37.69	-8.31	46.00	49.71	13.55	2.74 28.31 Peak
4 (S)	331.670	44.78	-1.22	46.00	55.72	14.59	3.11 28.64 QP
5 (S)	362.710	42.93	-3.07	46.00	53.08	15.30	3.28 28.73 QP
6 (S)	912.700	44.68	-1.32	46.00	47.71	21.11	5.24 29.38 QP

Vertical

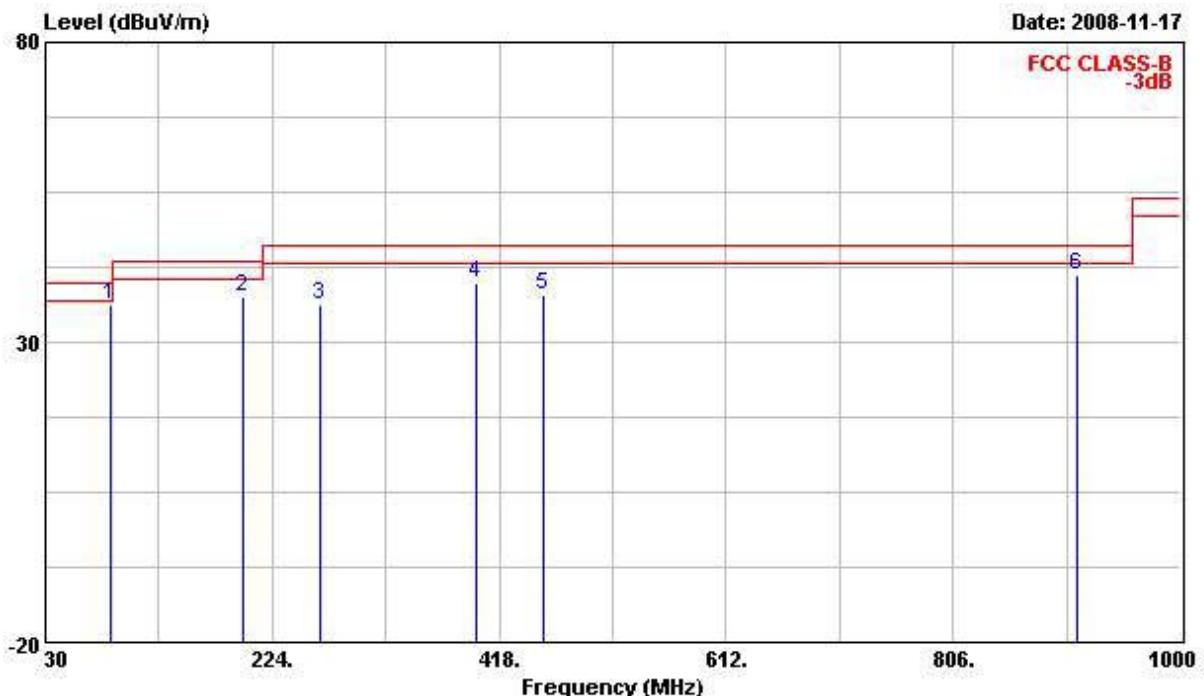

Freq	Level	Over Limit		Read		Antenna Factor	Cable Preamp		Remark
		MHz	dBuV/m	dB	Line		dBuV	dB/m	
1	86.260	36.40	-3.60	40.00	53.94	8.65	1.60	27.79	QP
2	198.780	37.41	-6.09	43.50	53.49	9.61	2.38	28.07	Peak
3	264.740	36.39	-9.61	46.00	48.38	13.57	2.73	28.30	Peak
4	397.630	39.74	-6.26	46.00	48.71	16.38	3.51	28.86	Peak
5	455.830	37.93	-8.07	46.00	46.10	17.21	3.70	29.08	Peak
6	912.700	41.11	-4.89	46.00	44.14	21.11	5.24	29.38	Peak

Note:


The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

1.1.9 Results for Radiated Emissions (1GHz~10th Harmonic)


Test date	Nov. 14, 2008	Test Site No.	03CH03-HY
Temperature	26	Humidity	50%
Test Engineer	Eddie	Configuration	802.11b CH 1 + Bluetooth CH 0 Mode

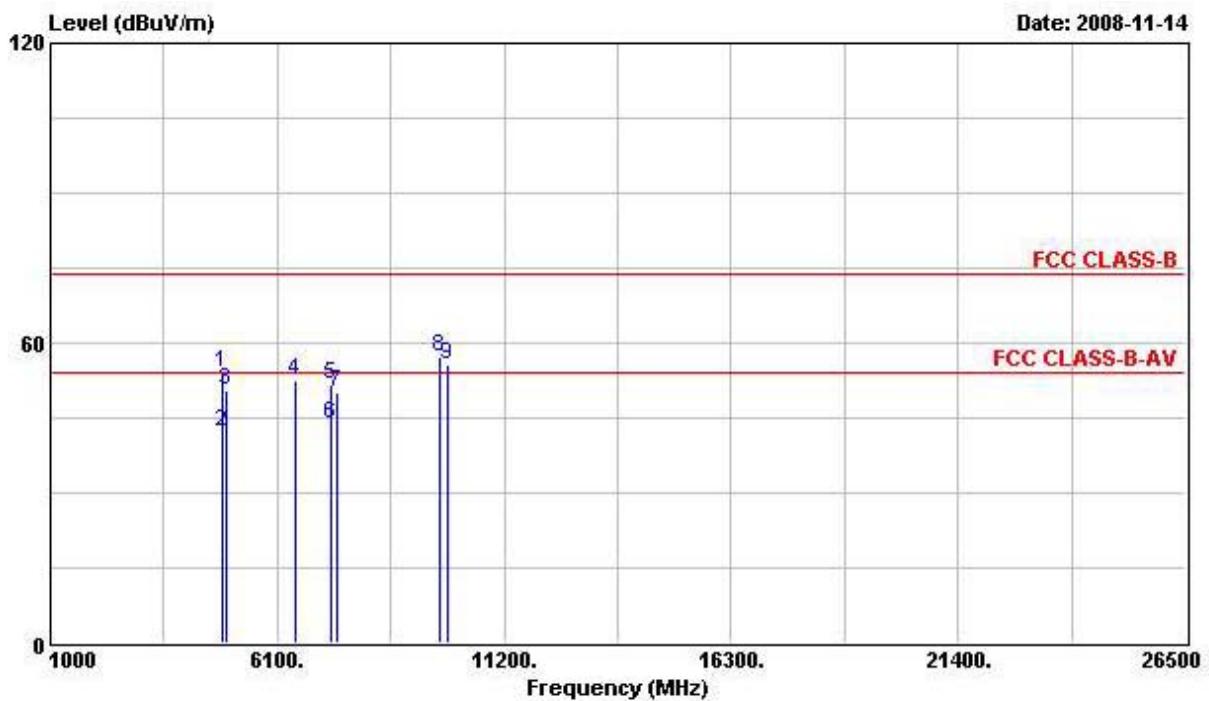Horizontal

Freq	Level	Over Limit		Read	Antenna	Cable Preamp		Remark
		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	
1	4876.000	54.21	-19.79	74.00	49.50	33.16	4.02	32.47 PEAK
2	4876.000	42.06	-11.94	54.00	37.34	33.16	4.02	32.47 Average
3	4964.000	50.46	-3.54	54.00	45.58	33.33	4.01	32.46 PK
4	6500.000	52.40			47.64	34.20	2.97	32.41 PEAK
5	7304.000	51.81	-22.19	74.00	44.80	35.94	3.91	32.85 PEAK
6	7304.000	43.63	-10.37	54.00	36.62	35.94	3.91	32.85 Average
7	7436.000	49.95	-4.05	54.00	42.33	36.28	4.28	32.93 PK
8	9748.000	57.23			46.22	38.62	5.31	32.92 PEAK
9	9916.000	55.61			43.99	38.93	5.57	32.87 PEAK

Note: Items 4, 8 and 9 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions.

Vertical

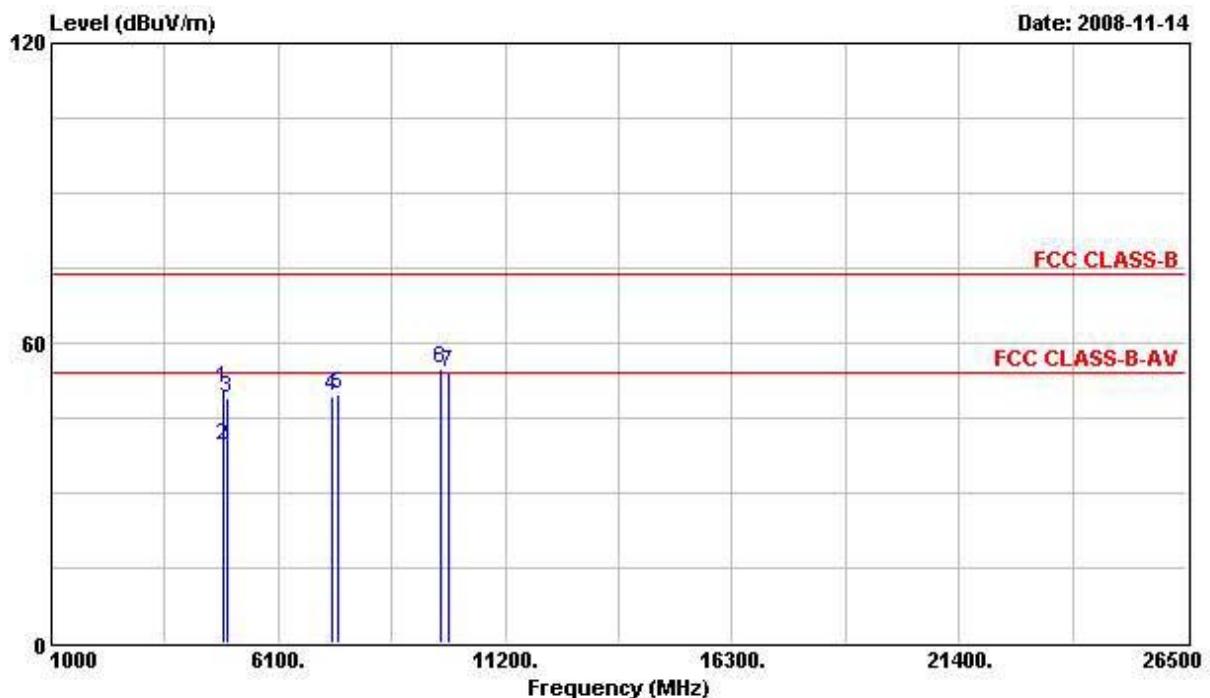

Freq	Level	Over Limit		Read Antenna		Cable Preamp		Remark
		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	
1	4876.000	51.04	-22.96	74.00	46.33	33.16	4.02	32.47 PEAK
2	4876.000	39.61	-14.39	54.00	34.89	33.16	4.02	32.47 Average
3	4964.000	48.95	-5.05	54.00	44.07	33.33	4.01	32.46 PK
4	7307.000	49.17	-4.83	54.00	42.16	35.94	3.91	32.85 PK
5	7444.000	49.89	-4.11	54.00	42.29	36.28	4.28	32.95 PK
6	9748.000	54.70			43.69	38.62	5.31	32.92 PEAK
7	9920.000	53.89			42.23	38.96	5.57	32.87 PEAK

Note: Items 6 and 7 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions.

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

2 LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSP30	100023	9kHz ~ 30GHz	Jan. 10, 2008	Conducted (TH01-HY)
Power Meter	R&S	NRVS	100444	DC ~ 40GHz	Jul. 11, 2008	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z51	100458	DC ~ 30GHz	Jul. 11, 2008	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z32	100057	30MHz ~ 6GHz	Jul. 11, 2008	Conducted (TH01-HY)
DC Power Source	G.W.	GPC-6030D	C671845	DC 1V ~ 60V	Mar. 13, 2008	Conducted (TH01-HY)
Temp. and Humidity Chamber	Giant Force	GTH-225-20-S	MAB0103-001	N/A	Jul. 18, 2008	Conducted (TH01-HY)
RF CABLE-1m	Jye Bao	RG142	CB034-1m	20MHz ~ 7GHz	Dec. 01, 2007	Conducted (TH01-HY)
RF CABLE-2m	Jye Bao	RG142	CB035-2m	20MHz ~ 1GHz	Dec. 01, 2007	Conducted (TH01-HY)
Signal Generator	R&S	SMR40	100116	10MHz ~ 40GHz	Mar. 10, 2008	Conducted (TH01-HY)
Oscilloscope	Tektonix	TDS380	B016197	400MHz/ 2GS/s	Jun. 27, 2008	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
AC Power Source	HPC	HPA-500W	HPA-9100024	AC 0 ~ 300V	May 30, 2008*	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is two year.

3 TEST LOCATION

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 nd Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085