

TEST REPORT

Report Number: 3197666ATL-001

December 31, 2009

Product Designation: W74 RF Wall Control

Standard: 47 CFR Part 15, Subpart C (15.231 - Periodic operation in the band 40.66-
40.70 MHz and above 70 MHz)
RSS-210, Issue 7, 2007

Tested by:
Intertek Testing Services NA Inc.
1950 Evergreen Blvd., Suite 100
Duluth, GA 30096


Client:
Hunter Fan
7130 Goodlett Farms Pkwy
Suite 400
Memphis, TN 38016
Contact: Robert Davis
Phone: 901.248.2212
Fax: 901.248.2382

Tests performed by:



Jeremy O. Pickens
EMC Department Manager

Report reviewed by:



Chris D. Capelle
Senior Project Engineer

All services undertaken are subject to the following general policy: This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to copy or distribute this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program. This report must not be used to claim product endorsement by A2LA, NIST, or any agency of the US Government.

1.0 Introduction and Conclusion

The tests indicated in section 2.0 were performed on the product constructed as described in section 3.0. The remaining test sections are the verbatim text from the actual data sheets used during the investigation. These test sections include the test name, the specified test Method, a list of the actual Test Equipment Used, documentation Photos, Results and raw Data. No additions, deviations, or exclusions have been made from the standard(s) unless specifically noted.

Based on the results of our investigation, we have concluded the product tested complies with the requirements of the standard(s) indicated. The results obtained in this test report pertain only to the item(s) tested.

2.0 Test Summary

Section	Test Full Name	Test Date	Result
4.0	System setup including cable interconnection details, support equipment and simplified block diagram. (System Setup)		
5.0	Overview of EUT (Low Power Transmitters) (FCC 15C - EUT Overview)		
6.0	Restrictions (FCC 15C - 15.231(a))	12/15/2009	PASS
7.0	Duty Cycle Determination (FCC 15A - 15.35(c))	12/15/2009	PASS
8.0	Radiated Emissions (FCC 15C - 15.231(b))	12/17/2009	PASS
9.0	Conducted emissions on AC power lines (Conducted Emissions)	12/30/2009	PASS
10.0	Bandwidth Requirements (FCC 15C - 15.231(c))	12/15/2009	PASS

3.0 Description of Equipment Under Test

Equipment Under Test			
Description	Manufacturer	Model Number	Serial Number
Fan/Light Controller	Hunter Fan	W74	Not Labeled

EUT receive date:	December 15, 2009
EUT receive condition:	Good

Description of EUT provided by Client:

The W74 is a wall mount wireless fan/light controller designed to work with Direct-Touch™ fans. The controller employs fan speed, light dimming, and fan reverse functions.

Description of EUT exercising:


During testing, the controller was configured to transmit continuously by depressing the light dimming control button.

4.0 System setup including cable interconnection details, support equipment and simplified block diagram. (System Setup)

Method:

Record the details of EUTcabling, document the support equipment, and show the interconnections in a block diagram.

Drawing:

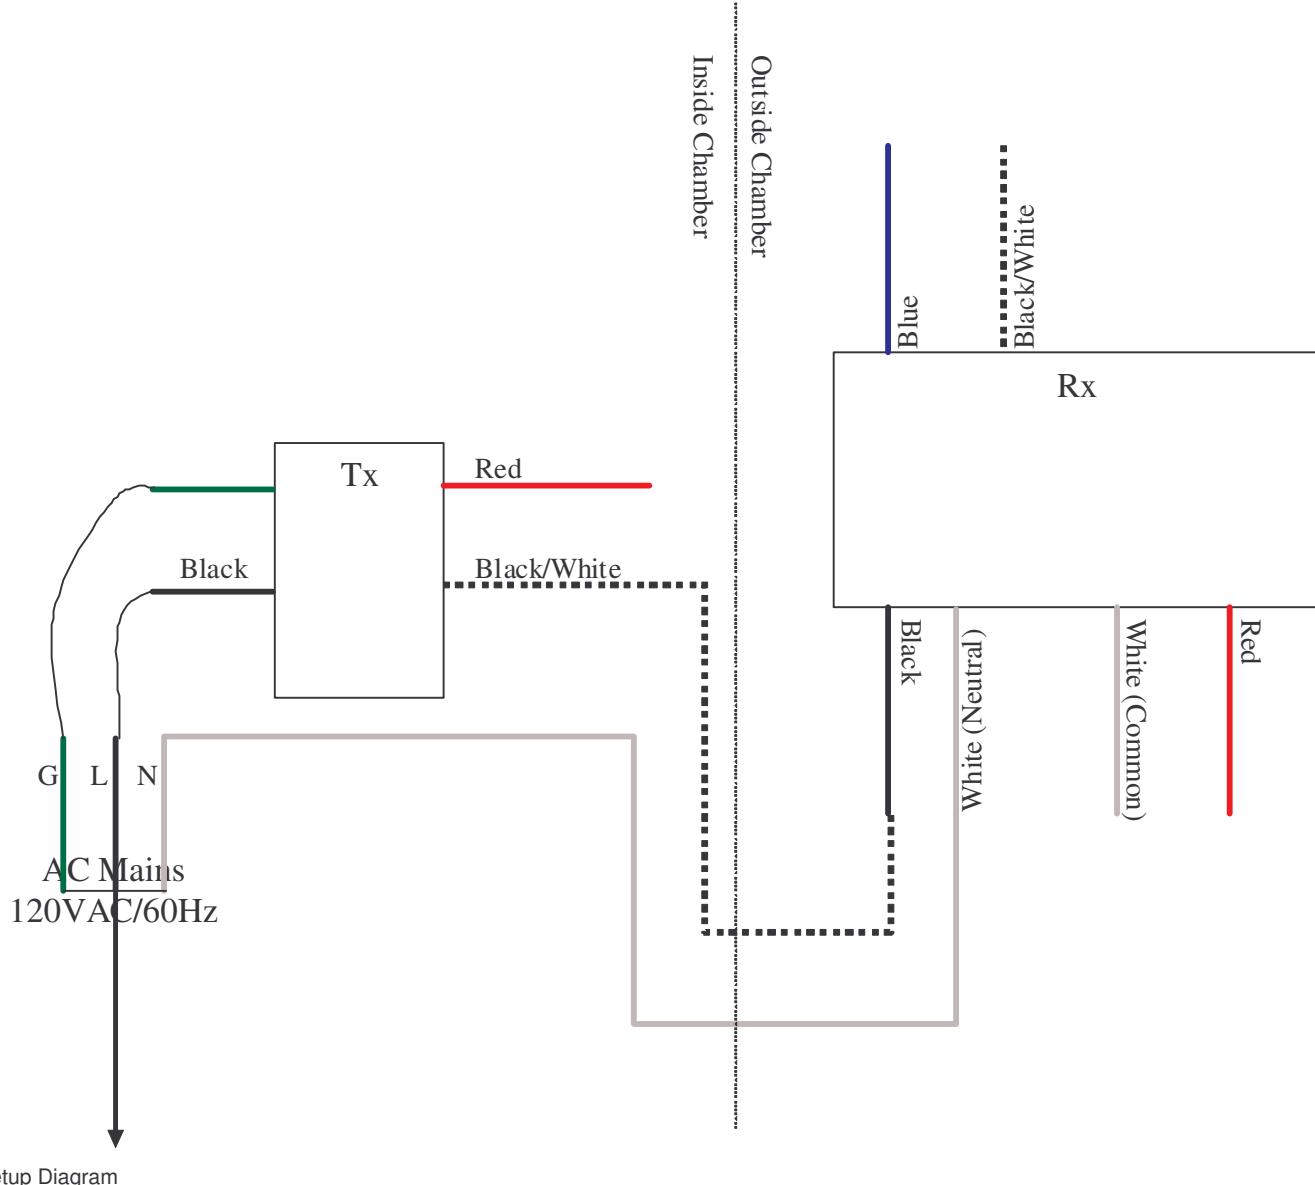

4.0 System setup including cable interconnection details, support equipment and simplified block diagram. (System Setup)**Data:**

EUT Cabling						
ID	Description	Length	Shielding	Ferrites	Connection	
					From	To
A	AC Input	1.5m	None	None	AC Mains	Wall Transmitter
B	Tx AC Output	15.0m	None	None	Wall Transmitter	Receiver

Support Equipment			
Description	Manufacturer	Model Number	Serial Number
None Required			

5.0 Overview of EUT (Low Power Transmitters) (FCC 15C - EUT Overview)

Method:

Complete the overview spreadsheet.

Related Submittal(s) Grants: This report is for use with an application for certification of a low power transmitter. One transmitter is included in the application.

Data:

Applicant	Hunter Fan 7130 Goodlett Farms Pkwy Ste. 400 Memphis TN 38016
Trade Name & Model No.	W74
FCC Identifier	H2WCASA11T
IC Identifier	3558A-W74
Frequency Range (MHz)	303
Antenna Type (15.203)	Internal
Manufacturer name & address	Hunter Fan 7130 Goodlett Farms Pkwy Ste. 400 Memphis TN 38016

Related Submittals and Grants:	This report is for use with an application for certification of a low power transmitter. One transmitter is included in the application.
Additions, deviations and exclusions from standards	None

6.0 Restrictions (FCC 15C - 15.231(a))

Method:

15.231(a) The provisions of this section are restricted to periodic operation within the band 40.66-40.70 MHz and above 70 MHz. Except as shown in paragraph (e) of this section, the intentional radiator is restricted to the transmission of a control signal such as those used with alarm systems, door openers, remote switches, etc. Continuous transmissions, voice, video and the radio control of toys are not permitted. Data is permitted to be sent with a control signal. The following conditions shall be met to comply with the provisions for this periodic operation:

(1) A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

(2) A transmitter activated automatically shall cease transmission within 5 seconds after activation.

(3) Periodic transmissions at regular predetermined intervals are not permitted. However, polling or supervision transmissions, including data, to determine system integrity of transmitters used in security or safety applications are allowed if the total duration of transmissions does not exceed more than two seconds per hour for each transmitter. There is no limit on the number of individual transmissions, provided the total transmission time does not exceed two seconds per hour.

(4) Intentional radiators which are employed for radio control purposes during emergencies involving fire, security, and safety of life, when activated to signal an alarm, may operate during the pendency of the alarm condition


(5) Transmission of set-up information for security systems may exceed the transmission duration limits in paragraphs (a)(1) and (a)(2) of this section, provided such transmissions are under the control of a professional installer and do not exceed ten seconds after a manually operated switch is released or a transmitter is activated automatically. Such set-up information may include data.

Test Equipment Used:

Description:	Manufacturer:	Model:	Asset Number:	Cal Date:	Cal Due:
Spectrum Analyzer, 20Hz-40GHz	Rohde & Schwarz	FSEK30	200062	10/19/2009	10/19/2010

Results: The sample tested was found to Comply.

Plot:

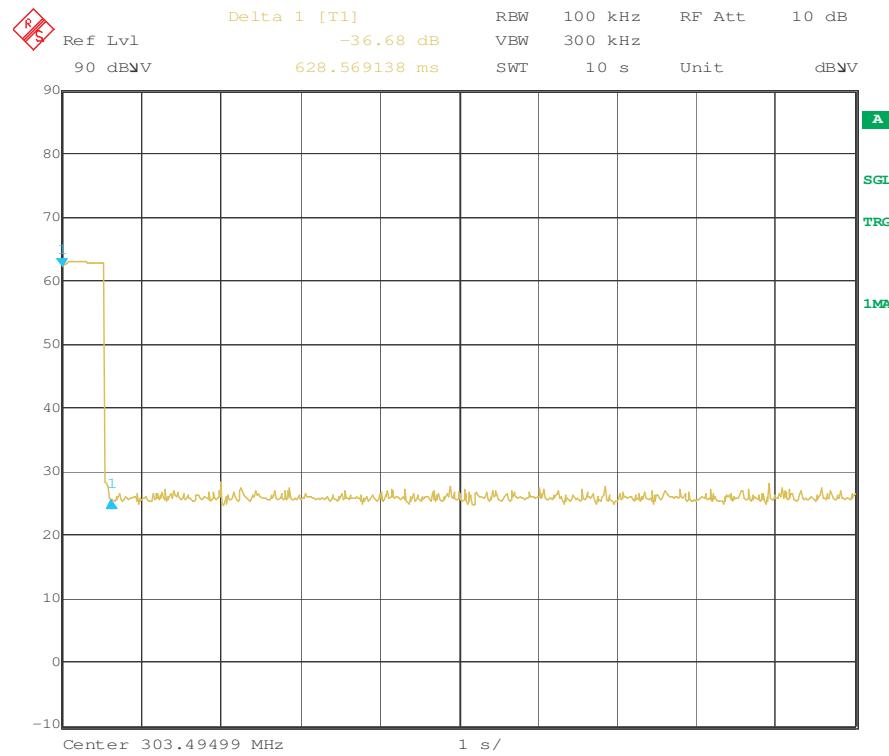

Date: 15.DEC.2009 10:22:58

Deactivation Plot

6.0 Restrictions (FCC 15C - 15.231(a))**Data:**

15.231(a)

	Response	Requirement
Frequency Range (MHz, max)	303	40.66-40.70 MHz and > 70MHz
Frequency Range (MHz, min)	303	40.66-40.70 MHz and > 70MHz
Transmit only control signal?	Yes	Only control signal allowed
Continuous transmission?	No	No
Voice transmission?	No	No
Video transmission?	No	No
Radio control of toy?	No	No

15.231(a)(1)

Manually operated?	Yes	
Deactivates within 5 seconds?	Yes	Yes
Show plot (10 second sweep)	Yes	

15.231(a)(2)

Automatically operated?	NA	
Deactivates within 5 seconds?	NA	
Show plot (10 second sweep)	NA	

15.231(a)(3)

Periodically transmits at predetermined intervals?	No	Allowed, with restrictions
Polling signals?	No	Allowed, with restrictions
Polling rate and timing	No	< 2 seconds per hour

15.231(a)(4)

For Emergency Use?	No	Allowed
--------------------	----	---------

15.231(a)(5)

Exceed 15.231(a)(1) or (a)(2) requirements?	No	Allowed for professional install
---	----	----------------------------------

7.0 Duty Cycle Determination (FCC 15A - 15.35(c))

Method:

(c) Unless otherwise specified, e.g. §15.255(b), when the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value. The exact method of calculating the average field strength shall be submitted with any application for certification or shall be retained in the measurement data file for equipment subject to notification or verification.

Determine the period of the pulse train, T, in mSec and record the results. T is defined as the time from the beginning of one pulse train to the beginning of the next pulse train.

Count the number of different types of pulses, N and record the results.

For each of the different types of pulses, count the number of occurrences within one pulse train.


Use the Duty Cycle Correction Factor, DCCF, from the results table and use it to adjust the field strength measurements recorded for radiated emissions.

Test Equipment Used:

Description:	Manufacturer:	Model:	Asset Number:	Cal Date:	Cal Due:
Spectrum Analyzer, 20Hz-40GHz	Rohde & Schwarz	FSEK30	200062	10/19/2009	10/19/2010

Results: The sample tested was found to Comply.

Plot:

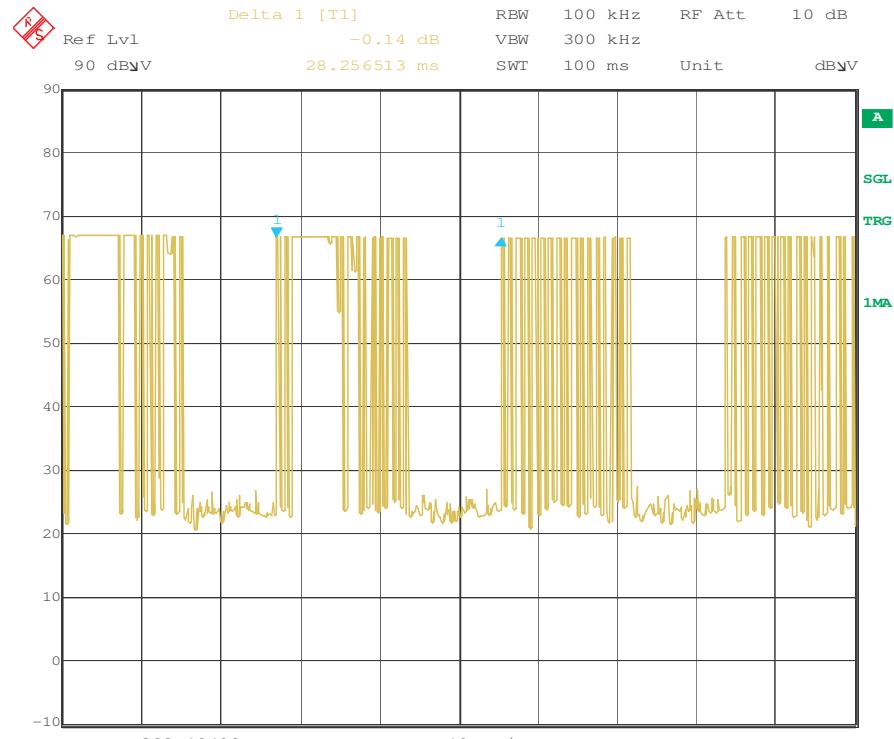


Date: 15.DEC.2009 09:32:19

100ms Plot

7.0 Duty Cycle Determination (FCC 15A - 15.35(c))

Plot:

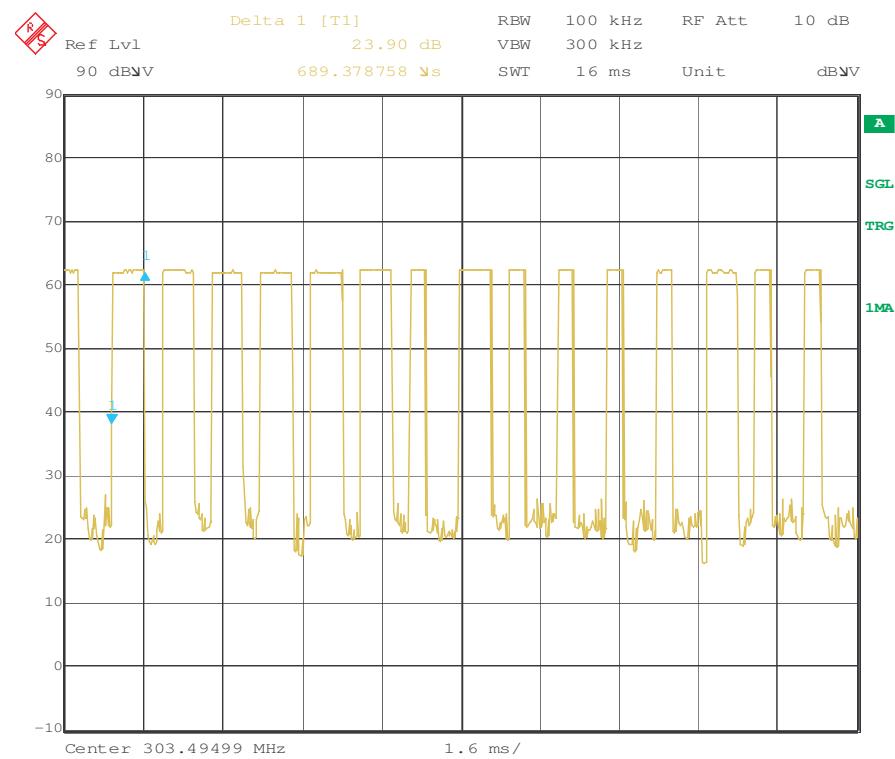


Date: 15.DEC.2009 09:35:41

Wide Pulse Width

7.0 Duty Cycle Determination (FCC 15A - 15.35(c))

Plot:

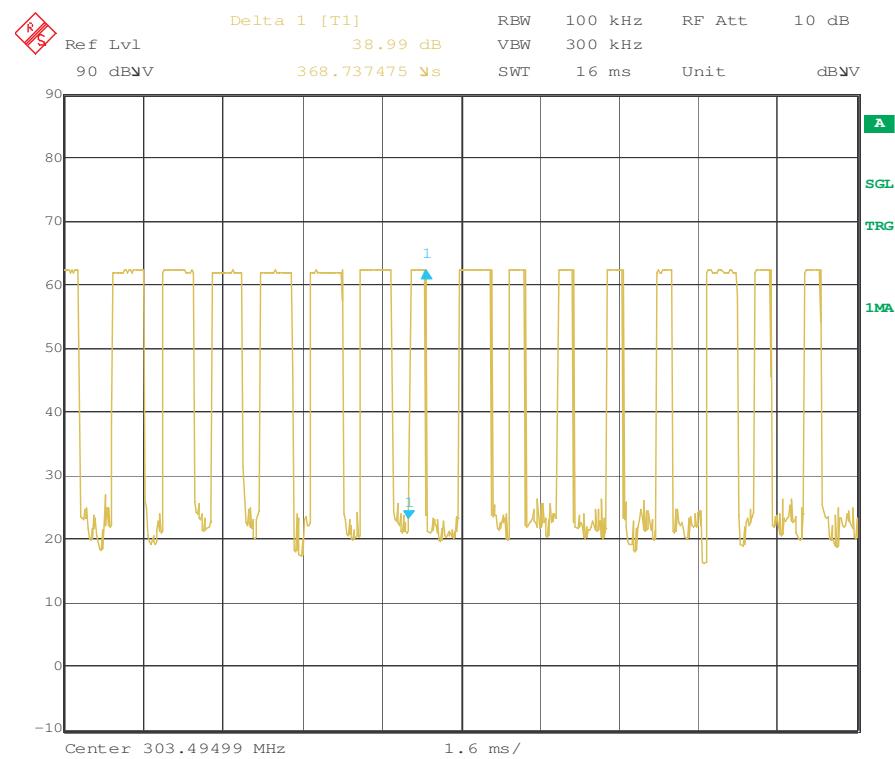

Date: 15.DEC.2009 09:36:10

Narrow Pulse Width

7.0 Duty Cycle Determination (FCC 15A - 15.35(c))

Data:

Duration of Pulse Train, T (mSec):	28.2
Averaging Interval, A _I (mSec):	28.2
Number of different Pulses, N:	2

	Number (#P _x)	Pulse Width, mSec (PW _x)	Product (#P _x)*(PW _x)
Pulse Width 1	8	0.69	5.52
Pulse Width 2	8	0.369	2.952
Pulse Width 3			
Pulse Width 4			
Pulse Width 5			
Pulse Width 6			
Pulse Width 7			
Pulse Width 8			
Pulse Width 9			
Pulse Width 10			

Duty Cycle:	0.300425532
Duty Cycle Correction Factor, dB:	-10.4

$$T_{on} = (PW_1 * \#P_1) + (PW_2 * \#P_2) + \dots + (PW_n * \#P_n)$$

$$DutyCycle = T_{on} \div A_I$$

$$DCCF = 20 * \log_{10}(DutyCycle)$$

8.0 Radiated Emissions (FCC 15C - 15.231(b))

Method:

(b) In addition to the provisions of §15.205, the field strength of emissions from intentional radiators operated under this section shall not exceed the limits specified in FCC Part 15.231(b).

Intentional radiators operating under the provisions of this section shall demonstrate compliance with the limits on the field strength of emissions, as shown in the above table, based on the average value of the measured emissions. As an alternative, compliance with the limits in the above table may be based on the use of measurement instrumentation with a CISPR quasi-peak detector. The specific method of measurement employed shall be specified in the application for equipment authorization. If average emission measurements are employed, the provisions in §15.35 for averaging pulsed emissions and for limiting peak emissions apply. Further, compliance with the provisions of §15.205 shall be demonstrated using the measurement instrumentation specified in that section.

The limits on the field strength of the spurious emissions in the above table are based on the fundamental frequency of the intentional radiator. Spurious emissions shall be attenuated to the average (or, alternatively, CISPR quasi-peak) limits shown in this table or to the general limits shown in §15.209, whichever limit permits a higher field strength.

For radiated emission measurements, the EUT is attached to a styro-foam block and placed on a non-conductive table whose top is 80cm above the ground plane. If the EUT is handheld, the signal shall be maximized through rotation and placement in the three orthogonal axes.

During the test the EUT is rotated and the antenna height and polarization are varied during the search for maximum signal level. The antenna height is varied from 1 to 4 meters.

Radiated emissions are taken at 3 meters unless the signal level is too low for measurement at that distance. If necessary, a pre-amplifier is used and/or the test is conducted at a closer distance. All readings are extrapolated back to the equivalent 3-meter reading using inverse scaling with distance.

Radiated emission measurements were performed from 30 MHz to 10 times the highest frequency generated in the EUT. When provided, emissions plots are taken with a peak detector unless otherwise indicated.

Analyzer resolution is:

- 100 kHz or greater for frequencies 1000 MHz and below,
- 1 MHz for frequencies above 1000 MHz.

Equipment setup for radiated disturbance tests shall follow the guidelines of ANSI C63.4:2003.

The Peak value of the Field Strength was measured. The Average value was obtained from the Peak by subtracting the Duty Cycle Correction Factor or by using an average detector.

Test Equipment Used:

Description:	Manufacturer:	Model:	Asset Number:	Cal Date:	Cal Due:
Antenna, BiLog, 20-2000MHz	Chase	CBL6112B	211386	10/02/2009	10/02/2010
Cable E01, <18GHz	Pasternack	RG214/U	E01	05/04/2009	05/04/2010
Cable E201, 18 GHz, N, 3m	Megaphase	TM18 NKNK 118	E201	01/29/2009	01/29/2010
Cable MP3, 18 GHz, N, 10m	Megaphase	G919-NKNK-394	MP3	05/04/2009	05/04/2010
Cable, 7 meters, 1-18GHz	Storm Products Co.	PR90-241-7MTR	ST-2	08/18/2009	08/18/2010
Cable, N-N 3 meters, 18GHz	Megaphase	TM18 NKNK 118	E203	05/12/2009	05/12/2010
EMI Receiver	Hewlett Packard	8546A	213109	10/12/2009	10/12/2010
EMI Receiver, Preselector section	Hewlett Packard	85460A	213108	10/12/2009	10/12/2010
Excel spreadsheet for radiated emissions	Software	Excel - RE Worksh	SW004	12/09/2009	12/09/2010
Preamplifier, 20 MHz to 18 GHz, 40 dB	A.H. Systems	PAM-0118	200108	04/07/2009	04/07/2010
Spectrum Analyzer, 20Hz-40GHz	Rohde & Schwarz	FSEK30	200062	10/19/2009	10/19/2010
Tile - software profile for radiated and conducted emissions testing.	Software	Tile - Emissions	SW006	12/09/2009	12/09/2010

Results: The sample tested was found to Comply.

8.0 Radiated Emissions (FCC 15C - 15.231(b))


Photo:



Test Setup - Front

8.0 Radiated Emissions (FCC 15C - 15.231(b))


Photo:

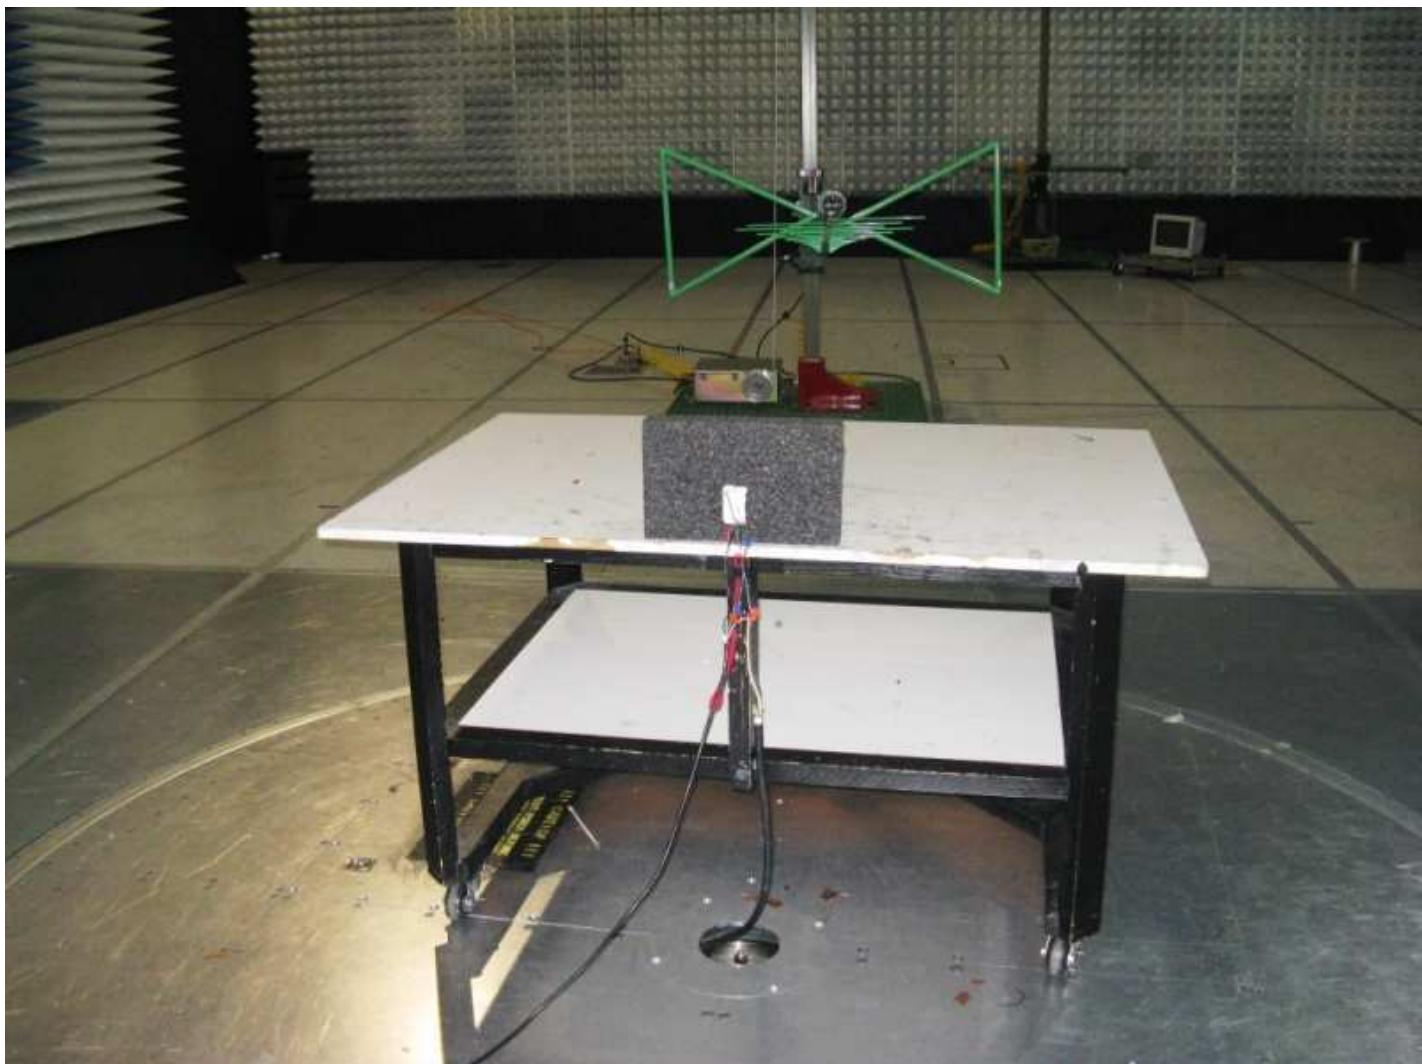

Test Setup - Rear

8.0 Radiated Emissions (FCC 15C - 15.231(b))


Plot:

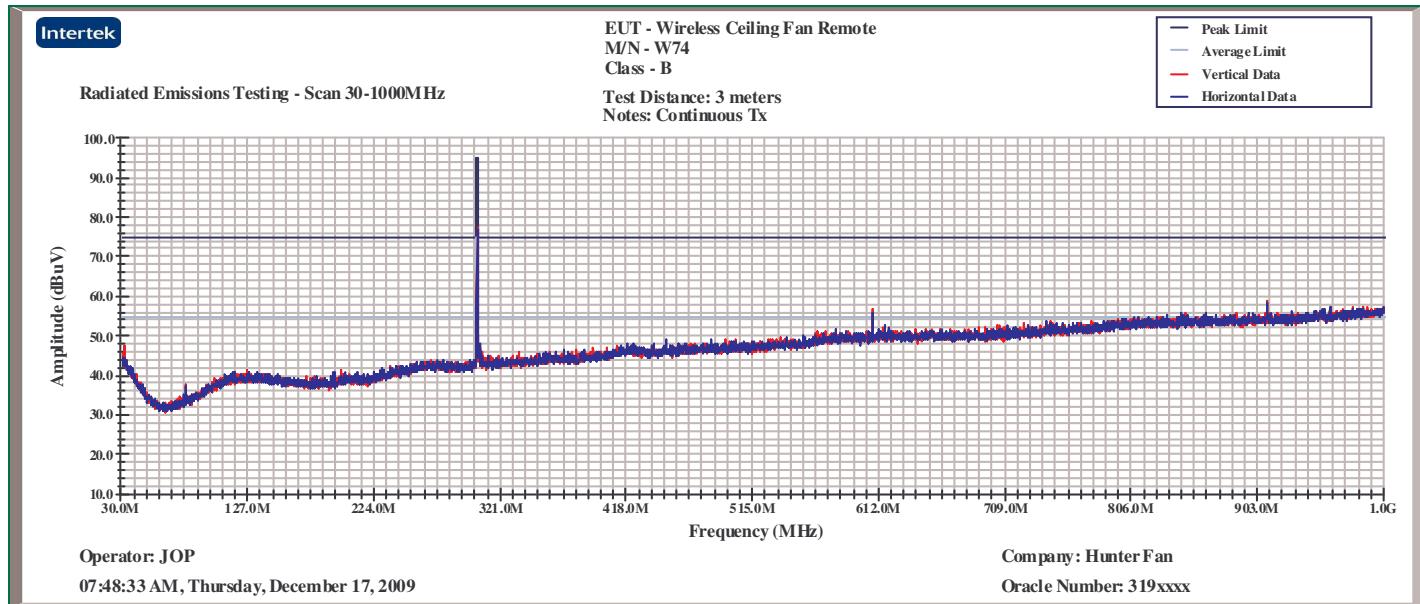

Peak Plot - 30-1000MHz

8.0 Radiated Emissions (FCC 15C - 15.231(b))

Plot:

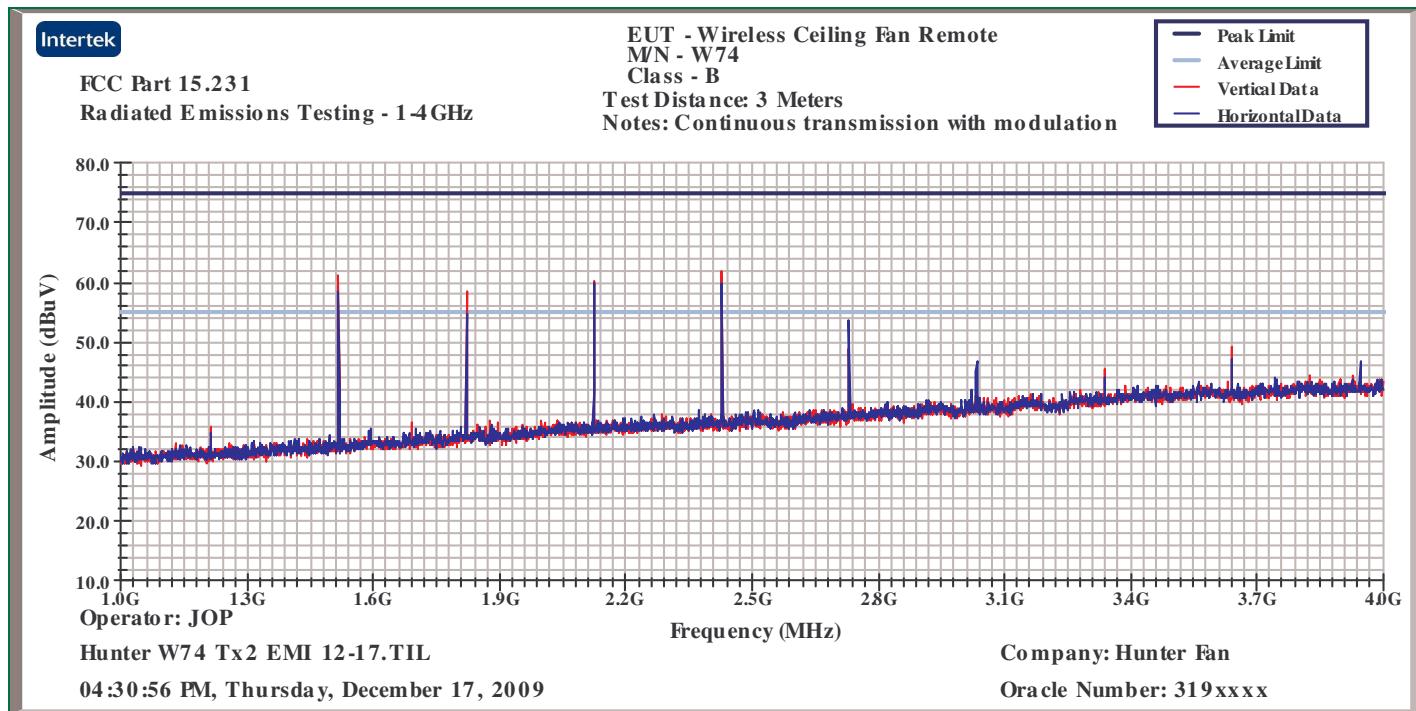

Peak Plot - 1-4GHz

8.0 Radiated Emissions (FCC 15C - 15.231(b))**Data:****Date:** 12/17/2009**Test Distance (m):** 3**Frequency Range (MHz):** 30-1000**Limit:** Hunter W74 Limit Avg**Input power:** 120VAC/60Hz**Modifications for compliance (y/n):** n

A	B	C	D	E	F	G	H	I	J
Ant. Pol. (V/H)	Frequency MHz	Reading dB(uV)	Antenna Factor dB(1/m)	Cable Loss dB	Duty Cycle Factor dB	Net dB(uV/m)	Limit dB(uV/m)	Margin dB	Detectors / Bandwidths Det/RBW/VBW
h	303.500	59.9	13.7	3.1	0.0	76.7	94.9	-18.2	Pk/120k/300k
h	303.500	59.9	13.7	3.1	10.4	66.3	74.9	-8.6	Pk/120k/300k
v	303.500	64.5	14.0	3.1	0.0	81.6	94.9	-13.3	Pk/120k/300k
v	303.500	64.5	14.0	3.1	10.4	71.2	74.9	-3.7	Pk/120k/300k
v	607.005	35.1	19.2	4.5	0.0	58.8	74.9	-16.1	Pk/120k/300k
v	607.005	35.1	19.2	4.5	10.4	48.4	54.9	-6.5	Pk/120k/300k
h	607.005	34.1	19.0	4.5	0.0	57.6	74.9	-17.3	Pk/120k/300k
h	607.005	34.1	19.0	4.5	10.4	47.2	54.9	-7.7	Pk/120k/300k
h	910.502	31.7	20.4	5.6	0.0	57.7	74.9	-17.2	Pk/120k/300k
h	910.502	31.7	20.4	5.6	10.4	47.3	54.9	-7.6	Pk/120k/300k
v	910.502	30.7	21.7	5.6	0.0	58.0	74.9	-16.9	Pk/120k/300k
v	910.502	30.7	21.7	5.6	10.4	47.6	54.9	-7.3	Pk/120k/300k
Calculations		$G=C+D+E-F$		$I=G-H$					

Tabular Data - 30-1000MHz

8.0 Radiated Emissions (FCC 15C - 15.231(b))**Data:**

Date: 12/17/2009

Test Distance (m): 3

Frequency Range (MHz): 1000-4000

Limit: 15.231

Input power: 120VAC/60Hz

Modifications for compliance (y/n): n

A	B	C	D	E	F	G	H	I	J	K
Ant. Pol. (V/H)	Frequency MHz	Reading dB(uV)	Antenna Factor dB(1/m)	Cable Loss dB	Pre-amp Factor dB	Duty Cycle Factor dB	Net dB(uV/m)	3m Limit dB(uV/m)	Margin dB	Detectors / Bandwidths Det/RBW/VBW
v	1517.438	70.9	25.1	6.4	40.3	0.0	62.1	74.9	-12.8	P/1M/3M
v	1517.438	70.9	25.1	6.4	40.3	10.4	51.7	54.9	-3.2	P/1M/3M
v	1820.938	68.8	26.2	7.1	40.5	0.0	61.6	74.9	-13.3	P/1M/3M
v	1820.938	68.8	26.2	7.1	40.5	10.4	51.2	54.9	-3.7	P/1M/3M
v	2124.475	69.7	27.3	7.7	40.5	0.0	64.2	74.9	-10.7	P/1M/3M
v	2124.475	69.7	27.3	7.7	40.5	10.4	53.8	54.9	-1.1	P/1M/3M
v	2427.938	66.7	27.8	8.3	40.6	0.0	62.2	74.9	-12.7	P/1M/3M
v	2427.938	66.7	27.8	8.3	40.6	10.4	51.8	54.9	-3.1	P/1M/3M
h	2731.513	58.5	28.6	9.0	40.7	0.0	55.4	74.9	-19.5	P/1M/3M
h	2731.513	58.5	28.6	9.0	40.7	10.4	45.0	54.9	-9.9	P/1M/3M
Calculations				H=C+D+E-F-G		I=G-H				

Tabular Data - 1-4GHz

9.0 Conducted emissions on AC power lines (Conducted Emissions)

Method:

Equipment setup for conducted disturbance tests shall follow the guidelines of ANSI C63.4:2003.

Measurements in the frequency range of 150kHz to 30 MHz shall be performed with a quasi-peak or average detector instrument that meets the requirements of Section One of CISPR 16. An AMN shall be used to provide a defined impedance at high frequencies across the power feed at the point of measurement of terminal voltage and also to provide isolation of the circuit under test from the ambient noise on the power lines. An AMN defined in CISPR 16 shall be used.

In the frequency range of 150 kHz to 30 MHz, a resolution/video bandwidth of 9kHz/30kHz or greater shall be used.

The EUT shall be located so that the distance between the boundary of the EUT and the closest surface of the AMN is 0.8m.

If a flexible mains cord is provided by the manufacturer that is in excess of 1m, the excess cable shall be folded back and forth as far as possible to form a bundle not exceeding 0.4m in length.

The EUT shall be arranged and connected with cables terminated in accordance with the product specification.

Conducted disturbance shall be measured between each current carrying conductor and the reference ground. Each measured values shall be reported.

If EUT is intended for tabletop use, the EUT shall be placed on a table whose top is 0.8m above the ground plane. A vertical, metal reference plane is to be placed 0.4m from the EUT. The vertical metal reference-plane is at least 2m by 2m. The EUT shall be kept at least 0.8m from any other metal surface or other ground plane not being part of the EUT. The table shall be constructed of non-conductive materials. Its dimensions are at least 1m by 1.5m, but may be extended for larger EUT.

If EUT is floor standing, the floor standing EUT shall be placed on a horizontal metal ground plane and isolated from the ground plane by up to 12 mm of insulating material. The metal ground plane shall extend at least 0.5m beyond the boundaries of the EUT and had minimum dimensions of 2m by 2m.

TEST SITE

The test site for conducted emissions is located at 1950 Evergreen Blvd, Suite 100, Duluth, Georgia 30096. The VCCI Registration Number for this site is C-2818.

MEASUREMENT UNCERTAINTY

Compliance of the product is based on the measured value. However, the measurement uncertainty is included for informational purposes. The values given are the measurement uncertainty values with an expanded uncertainty of k=2.

150 kHz to 30 MHz: +/- 2.8 dB

Results: The sample tested was found to Comply.

9.0 Conducted emissions on AC power lines (Conducted Emissions)

Photo:



Test Setup - Front

9.0 Conducted emissions on AC power lines (Conducted Emissions)


Photo:



Test Setup - Rear

9.0 Conducted emissions on AC power lines (Conducted Emissions)

Plot:

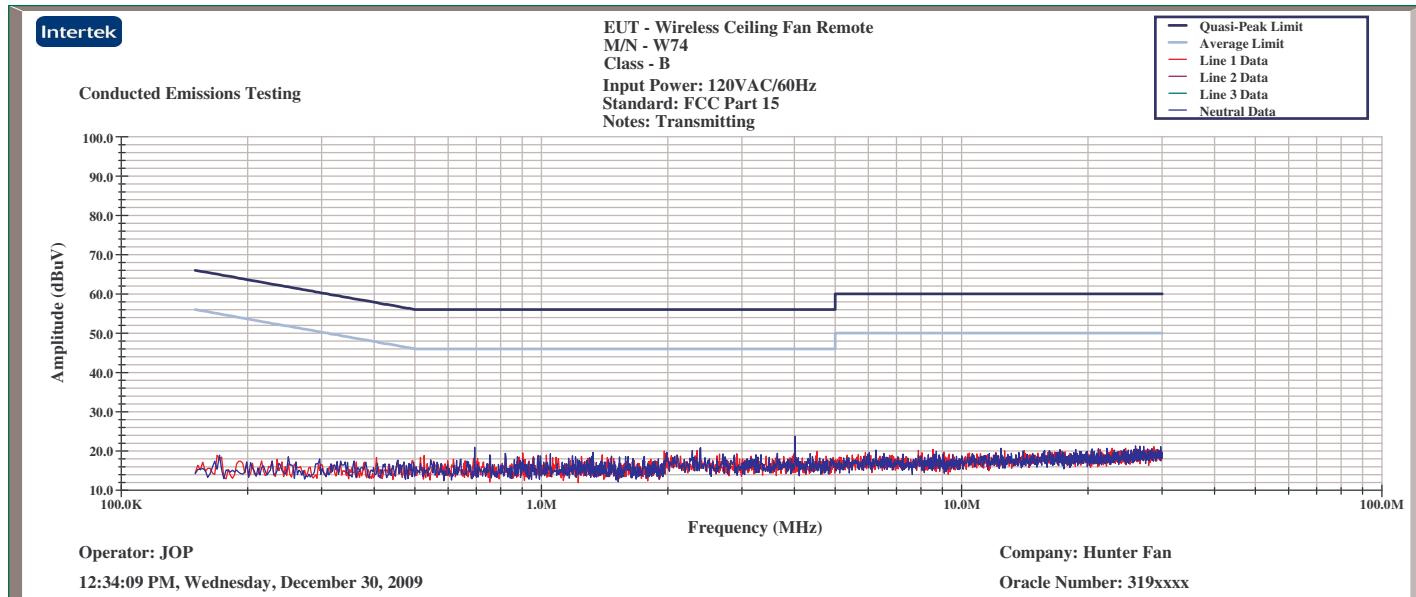

Peak Plot

9.0 Conducted emissions on AC power lines (Conducted Emissions)**Data:**

There were no peak emissions within 20dB of the average limit. Refer to peak plot for data.

10.0 Bandwidth Requirements (FCC 15C - 15.231(c))

Method:

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.


- Center Frequency is set to the fundamental of transmitter.
- Resolution Bandwidth is set to approximately 1% of the emission bandwidth.
- Video Bandwidth is set greater than or equal to the Resolution Bandwidth.

Test Equipment Used:

Description:	Manufacturer:	Model:	Asset Number:	Cal Date:	Cal Due:
Spectrum Analyzer, 20Hz-40GHz	Rohde & Schwarz	FSEK30	200062	10/19/2009	10/19/2010

Results: The sample tested was found to Comply.

Plot:

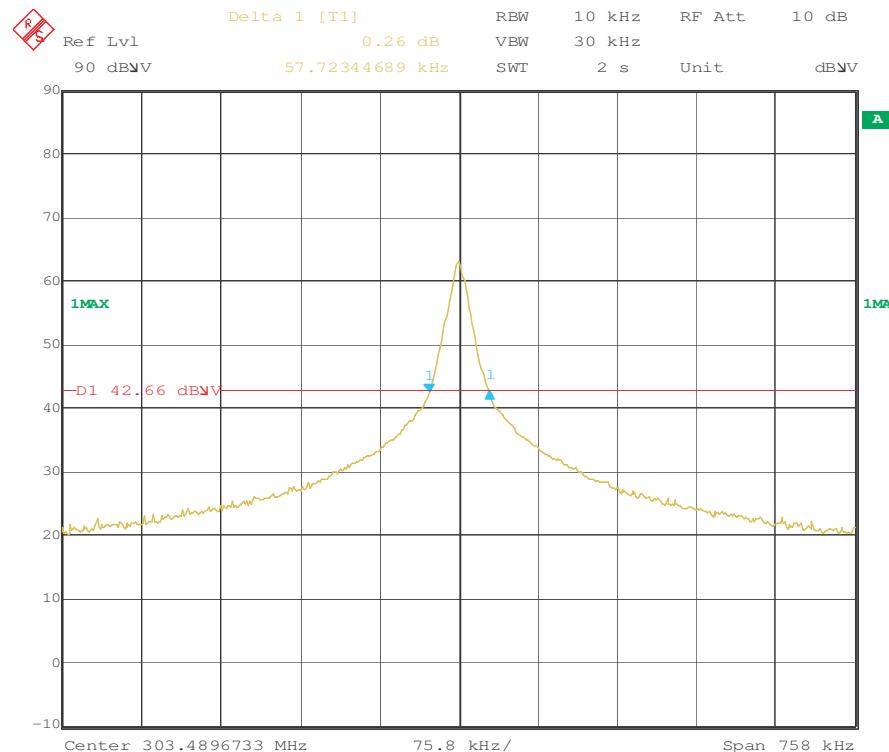

Date: 15.DEC.2009 10:37:01

Bandwidth

10.0 Bandwidth Requirements (FCC 15C - 15.231(c))**Data:**

Fundamental Frequency MHz	Measured Bandwidth MHz	Bandwidth Limit MHz
303	0.058	0.7575

Suggested Instrument Settings	
RBW (kHz):	8
VBW (kHz):	23
Span (MHz):	0.758
Sweep time (s):	>1