

FCC PART 15C TEST REPORT FOR CERTIFICATION

On Behalf of

TLV CO., LTD.

Pocket TrapMan

PT3

Brand: TLV

FCC ID: H3RTLVP031

Prepared for : TLV CO., LTD.

881 Nagasuna, Noguchi, Kakogawa, Hyogo 675-8511 Japan

Prepared By : Audix Technology (Shenzhen) Co., Ltd.

No. 6, Kefeng Road, Science & Technology Park,
Nanshan District , Shenzhen, Guangdong, China

Tel: (0755) 26639496



Report Number : ACS-F25113

Date of Test : May.05~20, 2025

Date of Report : Jun.12, 2025

TABLE OF CONTENTS

Description	Page
1. SUMMARY OF STANDARDS AND RESULTS.....	5
1.1. Description of Standards and Results	5
2. GENERAL INFORMATION.....	6
2.1. Description of Equipment Under Test	6
2.2. Feature of Equipment Under Test.....	7
2.3. Tested Supporting System Details	8
2.4. Block Diagram of connection between EUT and simulators.....	8
2.5. Test information.....	9
2.6. Test Facility	10
2.7. Measurement Uncertainty (95% confidence levels, k=2).....	10
3. POWER LINE CONDUCTED EMISSION TEST	11
3.1. Test Equipments.....	11
3.2. Block Diagram of Test Setup	11
3.3. Power Line Conducted Emission Test Limits.....	11
3.4. Configuration of EUT on Test	11
3.5. Operating Condition of EUT.....	12
3.6. Test Procedure	12
3.7. Power Line Conducted Emission Test Results	12
4. RADIATED EMISSION TEST	17
4.1. Test Equipments.....	17
4.2. Block Diagram of Test Setup	18
4.3. Radiated Emission Limits Standard:.....	19
4.4. EUT Configuration on Test	19
4.5. Operating Condition of EUT.....	19
4.6. Test Procedure	20
4.7. Radiated Emission Test Results.....	20
5. CONDUCTED SPURIOUS EMISSIONS.....	62
5.1. Test Equipments.....	62
5.2. Limit.....	62
5.3. Test Procedure	62
5.4. Test result.....	62
6. 20 DB & 99% BANDWIDTH TEST	69
6.1. Test Equipments.....	69
6.2. Limit.....	69
6.3. Test Procedure	69
6.4. Test Results.....	70
7. CARRIER FREQUENCY SEPARATION TEST.....	72
7.1. Test Equipments.....	72
7.2. Limit.....	72
7.3. Test Procedure	72
7.4. Test Results.....	73
8. NUMBER OF HOPPING FREQUENCY TEST.....	74
8.1. Test Equipments.....	74
8.2. Limit.....	74

8.3.	Test Procedure	74
8.4.	Test Results	75
9.	DWELL TIME	76
9.1.	Test Equipments	76
9.2.	Limit	76
9.3.	Test Procedure	76
9.4.	Test Results	77
10.	MAXIMUM PEAK OUTPUT POWER TEST	80
10.1.	Test Equipments	80
10.2.	Limit	80
10.3.	Test Procedure	80
10.4.	Test Results	80
11.	BAND EDGE COMPLIANCE TEST	82
11.1.	Test Equipments	82
11.2.	Limit	82
11.3.	Test Produce	82
11.4.	Test Results	83
12.	ANTENNA REQUIREMENT	92
12.1.	Standard Applicable	92
12.2.	Antenna Connected Construction	92
13.	DEVIATION TO TEST SPECIFICATIONS	93

Appendix A. Setup Photographs

Appendix B. Photographs of the EUT

TEST REPORT

Applicant : TLV CO., LTD.
Manufacturer : TLV CO., LTD.
Product : Pocket TrapMan
FCC ID : H3RTLVP031
(A) Model No. : PT3
(B) Brand : TLV
(C) Test Voltage : DC 3.7V

Tested for comply with:
FCC CFR47 Part 15 Subpart C

Test procedure used:
ANSI C63.10: 2020+COR1:2023

The device described above is tested by Audix Technology (Shenzhen) Co., Ltd. to confirm comply with all the FCC Part 15 Subpart C requirements. The test results are contained in this test report and Audix Technology (Shenzhen) Co., Ltd. is assumed full responsibility for the accuracy and completeness of these tests. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements. This report contains data that are not covered by the NVLAP accreditation.

This Report is made under FCC Part 2.1074. No modifications were required during testing to bring this product into compliance.

This report applies to single evaluation of one sample of above mentioned product and shall not be reproduced in part without written approval of Audix Technology (Shenzhen) Co., Ltd..

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

Date of Test: May.05~20, 2025 Date of Report: Jun.12, 2025

Prepared by: Olivia Liu Reviewed by: Thomas Chen
Olivia Liu / Assistant Thomas Chen / Assistant Manager

Approved & Authorized Signer:



1. SUMMARY OF STANDARDS AND RESULTS

1.1. Description of Standards and Results

The EUT has been tested according to the applicable standards as referenced below.

EMISSION		
Description of Test Item	Standard	Results
Power Line Conducted Emission Test	FCC Part 15 : 15.207 ANSI C63.10: 2020+COR1:2023	PASS
Radiated Emission Test	FCC Part 15 15.209 FCC Part 15 15.205 FCC Part 15 15.247(d) ANSI C63.10: 2020+COR1:2023	PASS
Conducted Spurious Emissions	FCC Part 15: 15.247(d) ANSI C63.10 2020	PASS
Carrier Frequency Separation Test	FCC Part 15: 15.247(a)(1) ANSI C63.10: 2020+COR1:2023	PASS
20dB & 99% Bandwidth Test	FCC Part 15: 15.215© ANSI C63.10: 2020+COR1:2023	PASS
Number Of Hopping Frequency Test	FCC Part 15: 15.247(a)(1)(iii) ANSI C63.10: 2020+COR1:2023	PASS
Dwell Time Test	FCC Part 15: 15.247(a)(1)(iii) ANSI C63.10: 2020+COR1:2023	PASS
Maximum Peak Output Power Test	FCC Part 15 15.247(b)(1) ANSI C63.10: 2020+COR1:2023	PASS
Band Edge Compliance Test	FCC Part 15 15.247(d) ANSI C63.10: 2020+COR1:2023	PASS
Antenna requirement	FCC Part 15 : 15.203	PASS
Note: Measurement uncertainty affection to the result is not considered, the EUT is technically compliant with standard requirements.		

2. GENERAL INFORMATION

2.1. Description of Equipment Under Test

Applicant	TLV CO., LTD.
Applicant Address	881 Nagasuna, Noguchi, Kakogawa, Hyogo 675-8511 Japan
Manufacturer	TLV CO., LTD.
Manufacturer Address	881 Nagasuna, Noguchi, Kakogawa, Hyogo 675-8511 Japan
Product	Pocket TrapMan
Model No.	PT3
Brand	TLV
FCC ID	H3RTLVP031
Sample Type	Mass production
Date of Receipt	Apr.24, 2025
Date of Test	May.05~20, 2025
Remark: This report only for BDR+EDR.	


2.2. Feature of Equipment Under Test

Product Feature & Specification		
Product	Pocket TrapMan	
Model No.	PT3	
Power Source	☐ Commercial Power	AC 100~240 V
	☒ External Power Source	DC 3.7V
	☐ Li-ion Battery	DC V
	☐ UM battery	DC V
Bluetooth		
Radio	BDR +EDR; BLE	
Frequency Range	2402-2480MHz	
Type of Modulation	GFSK, $\pi/4$ DQPSK, 8DPSK	
Data Rate	1Mbps, 2Mbps, 3Mbps	
Quantity of Channels	79	
Channel Separation	1MHz	
Antenna System		
Type of Antenna & Antenna Peak Gain	Bluetooth (2.402-2.480GHz) Antenna Antenna Type : PCB antenna Antenna Gain: 3.5dBi max	

2.3. Tested Supporting System Details

No.	Description	ACS No.	Manufacturer	Model	Serial Number
1.	Notebook	N/A	ACER	ZOW	N/A
Power Cord(3C): Unshielded, Detachable, 1.8m Power Adaptor: Manufacturer: Lite-On, M/N: PA-1900-32 Cable: Unshielded, Undetectable, 4.0m(Bond one ferrite core)					

2.4. Block Diagram of connection between EUT and simulators



(EUT: Pocket TrapMan)

2.5. Test information

A special software (ISRT.exe) was used to control EUT work in TX mode

Tested mode, Packet Type, peak output power information			
Mode	Packet Type	Output power(dBm) P max	Output Power(dBm) P low
GFSK	DH1	8.140	6.825
	DH3		
	DH5		
8DPSK	3-DH1	9.399	8.118
	3-DH3		
	3-DH5		

Note: $\pi/4$ DQPSK mode has been verified to have the lowest power, so the final test were performed with GFSK and 8DPSK mode, the worse-case packet type were:

GFSK Mode: DH5

8DPSK Mode: 3DH5

Item		Modulation	Data Rate	Test Channel
Radiated Test Case	Radiated Band Edge	GFSK	1Mbps	00/78
		8-DPSK	3Mbps	00/78
	Radiated Spurious Emission	GFSK	1Mbps	00/39/78
		8-DPSK	3Mbps	00/39/78
Conducted Test Case	20dB Bandwidth	GFSK	1Mbps	00/39/78
		8-DPSK	3Mbps	00/39/78
	Carrier Frequency Separation	GFSK	1Mbps	39
		8-DPSK	3Mbps	39
	Time of Occupancy	GFSK	1Mbps	39
		8-DPSK	3Mbps	39
	Number of Hopping Channels	GFSK	1Mbps	39
		8-DPSK	3Mbps	39
	Maximum Peak Output Power	GFSK	1Mbps	00/39/78
		8-DPSK	3Mbps	00/39/78
	Band Edges	GFSK	1Mbps	00/78
		8-DPSK	3Mbps	00/78
	Spurious Emission	GFSK	1Mbps	00/39/78
		8-DPSK	3Mbps	00/39/78

2.6. Test Facility

Site Description

Name of Firm

: Audix Technology (Shenzhen) Co., Ltd.
No. 6, Kefeng Road, Science & Technology Park,
Nanshan District , Shenzhen, Guangdong, China

EMC Lab.

: Certificated by ISED, Canada
Company Number: 5183A
CAB identifier: CN0034
Valid Date: Mar.31, 2026

Certificated by FCC, USA
Designation No.: CN5022
Valid Date: Aug.03, 2025

Accredited by NVLAP, USA
NVLAP Code: 200372-0
Valid Date: Mar.31, 2026

2.7. Measurement Uncertainty (95% confidence levels, k=2)

Test Item	Uncertainty
Uncertainty for Conduction emission test in No. 1 Conduction	$\pm 2.6\text{dB}$ (150KHz to 30MHz)
Uncertainty for Radiation Emission test in 3m chamber	$\pm 3.8\text{dB}$ (30~200MHz, Polarization: H)
	$\pm 3.8\text{dB}$ (30~200MHz, Polarization: V)
	$\pm 4.0\text{dB}$ (200M~1GHz, Polarization: H)
	$\pm 4.0\text{dB}$ (200M~1GHz, Polarization: V)
Uncertainty for Radiation Emission test in 3m chamber(1GHz-18GHz)	$\pm 4.0\text{dB}$ (1~6GHz, Distance: 3m)
	$\pm 4.0\text{dB}$ (6~18GHz, Distance: 3m)
Uncertainty for Radiated Spurious Emission test in RF chamber	$\pm 3.7\text{dB}$ (30MHz~1000MHz)
	$\pm 3.3\text{dB}$ (1~26.5GHz)
Uncertainty for Conduction Spurious emission test	$\pm 2.0\text{dB}$
Uncertainty for Output power test	$\pm 0.8\text{dB}$
Uncertainty for Bandwidth test	$\pm 4.6\%$
Uncertainty for DC power test	$\pm 0.1\%$
Uncertainty for test site temperature and humidity	$\pm 0.6^{\circ}\text{C}$
	$\pm 3\%$


3. POWER LINE CONDUCTED EMISSION TEST

3.1. Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	1# Shielding Room	AUDIX	N/A	N/A	Nov.09,22	3 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESCI	100842	Mar.10,25	1 Year
3.	L.I.S.N.#1	Rohde & Schwarz	ENV216	102160	Jun.19,24	1 Year
4.	RF Cable	Eastsheep	KTR-141FEP-50	2501002	Jan.15,25	1 Year
5.	Test Software	AUDIX	e3	6.100913a	N/A	N/A

Note: N/A means Not applicable.

3.2. Block Diagram of Test Setup

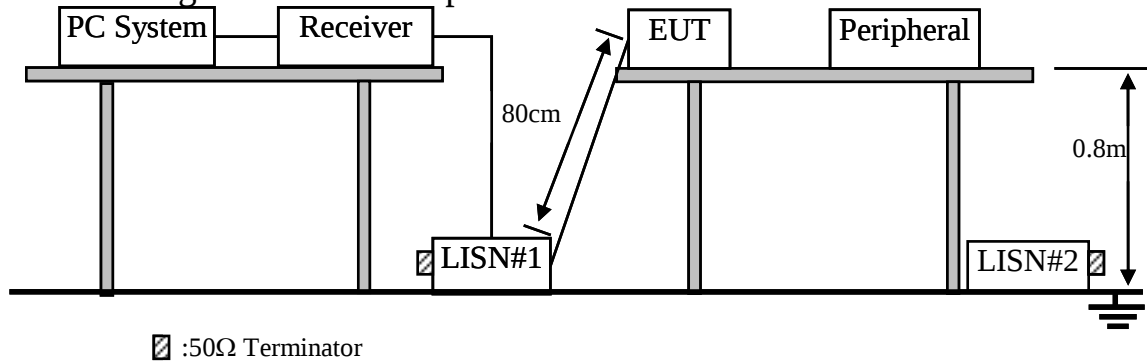

3.3. Power Line Conducted Emission Test Limits

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. * Decreasing linearly with logarithm of frequency.

2. The lower limits shall apply at the transition frequencies.

3. Emission Level (dBμV) = Factor (L.I.S.N.) (dB) + Cable Loss (dB) + Reading (Receiver) (dBμV)

3.4. Configuration of EUT on Test

The following equipment are installed on Power Line Conducted Emission Test to meet the commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

3.4.1. Pocket TrapMan (EUT)

Model No. : PT3

Serial No. : N/A

3.4.2. Support Equipment: As Tested Supporting System Details, in Section 2.3.

3.5. Operating Condition of EUT

- 3.5.1. Setup the EUT as shown as Section 3.2.
- 3.5.2. Turn on the power of EUT.
- 3.5.3. PC run test software to control EUT work in Tx mode.

3.6. Test Procedure


The EUT was placed on a non-metallic table, 80cm above the ground plane. The EUT Power Via Adapter connected to the power mains through a line impedance stabilization network (L.I.S.N. #1). This provides a 50 ohm coupling impedance for the EUT (Please refer the block diagram of the test setup and photographs). The AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10 on Conducted Emission Test.

The bandwidth of test receiver (R & S ESCI) is set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

3.7. Power Line Conducted Emission Test Results


PASS. (All emissions not reported below are too low against the prescribed limits.)

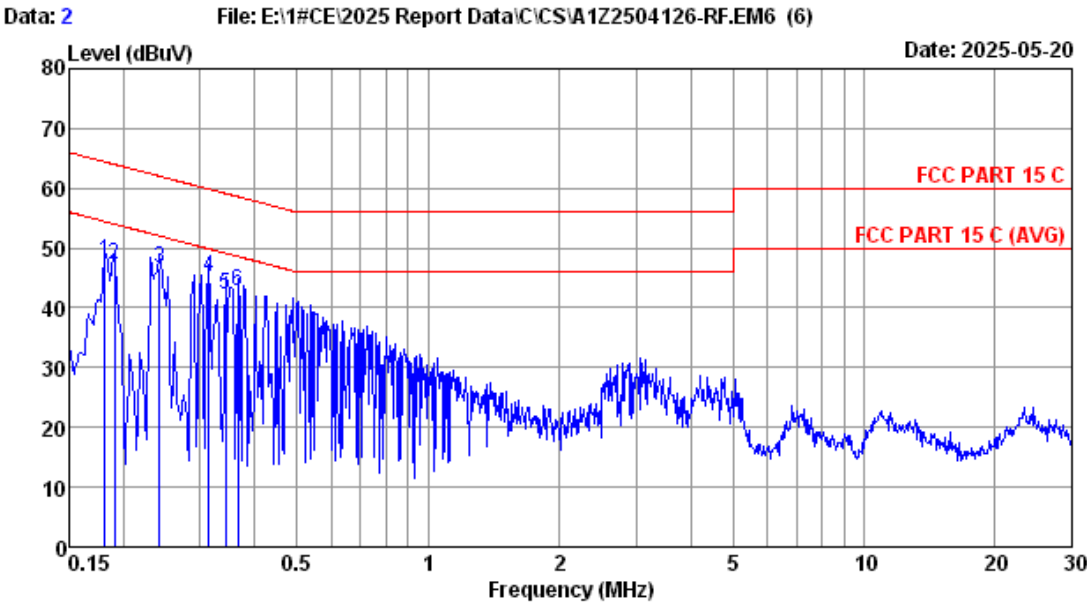

Site no :1# CE Data No :2
 Dis./Lisn :2024 ENV216-L
 Limit :FCC PART 15 C
 Env./Ins. :23.7°C/50% Engineer :Hongjie
 Power Rating :
 Test Mode :BDR TX MODE

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.182	9.76	0.01	38.16	47.93	64.42	16.49	QP
2	0.190	9.76	0.01	37.42	47.19	64.02	16.83	QP
3	0.242	9.76	0.01	36.90	46.67	62.04	15.37	QP
4	0.313	9.76	0.01	35.40	45.17	59.88	14.71	QP
5	0.343	9.76	0.01	32.33	42.10	59.13	17.03	QP
6	0.365	9.76	0.01	33.10	42.87	58.61	15.74	QP


Remarks: 1.Emission Level=LISN Factor+Cable Loss+Reading.
 2.If the average limit is met when using a quasi-peak detector.
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.

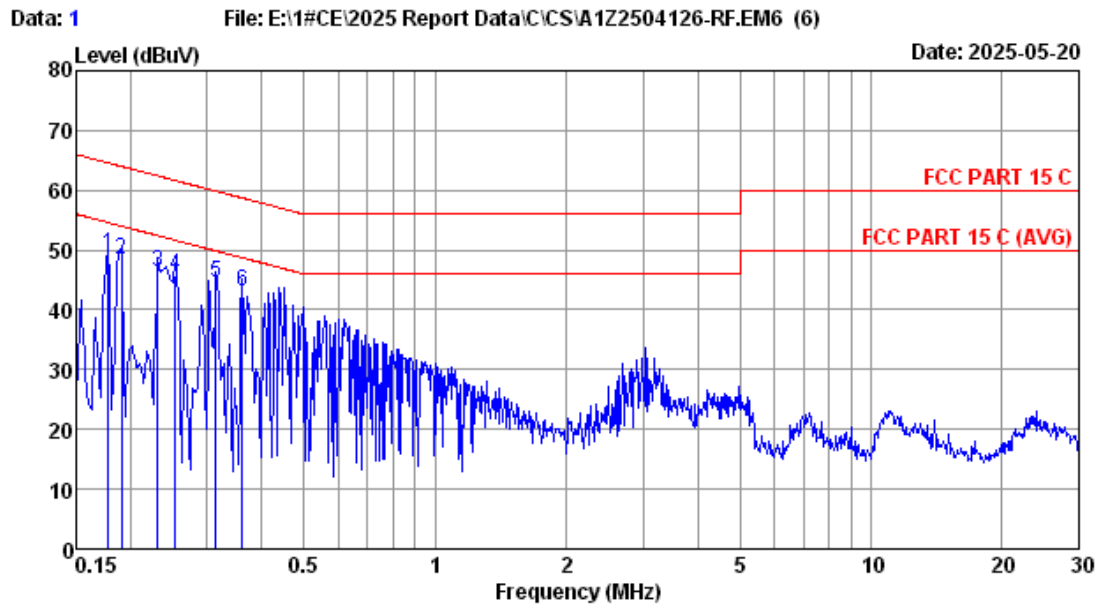

Site no :1# CE Data No :1
 Dis./Lisn :2024 ENV216-N
 Limit :FCC PART 15 C
 Env./Ins. :23.7°C/50% Engineer :Hongjie
 Power Rating :
 Test Mode :BDR TX MODE

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.178	9.77	0.01	39.46	49.24	64.59	15.35	QP
2	0.190	9.78	0.01	38.64	48.43	64.02	15.59	QP
3	0.230	9.78	0.01	36.50	46.29	62.44	16.15	QP
4	0.253	9.78	0.01	36.08	45.87	61.64	15.77	QP
5	0.313	9.78	0.01	34.65	44.44	59.88	15.44	QP
6	0.361	9.78	0.01	33.44	43.23	58.69	15.46	QP

Remarks: 1.Emission Level=LISN Factor+Cable Loss+Reading.
 2.If the average limit is met when using a quasi-peak detector.
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.

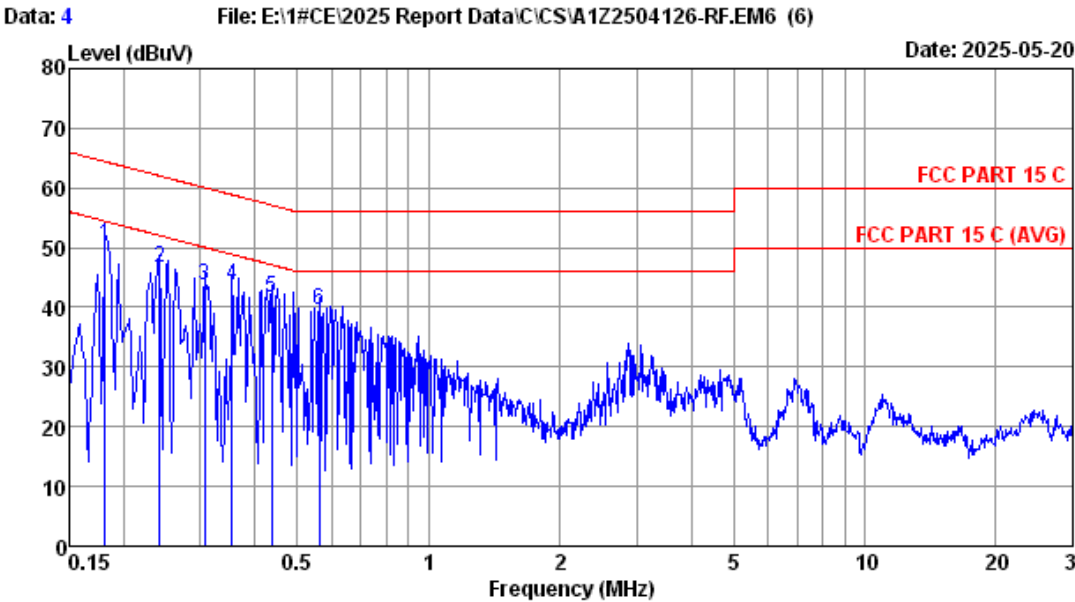


Site no :1# CE Data No :4
 Dis./Lisn :2024 ENV216-L
 Limit :FCC PART 15 C
 Env./Ins. :23.7°C/50% Engineer :Hongjie
 Power Rating :
 Test Mode :EDR TX MODE

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.182	9.76	0.01	40.69	50.46	64.42	13.96	QP
2	0.242	9.76	0.01	37.00	46.77	62.04	15.27	QP
3	0.307	9.76	0.01	33.97	43.74	60.06	16.32	QP
4	0.354	9.76	0.01	33.80	43.57	58.87	15.30	QP
5	0.437	9.76	0.01	31.79	41.56	57.11	15.55	QP
6	0.561	9.76	0.01	29.78	39.55	56.00	16.45	QP

Remarks: 1.Emission Level=LISN Factor+Cable Loss+Reading.
 2.If the average limit is met when using a quasi-peak detector,
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.

Data: 3 File: E:\1#CE\2025 Report Data\C\CS\A1Z2504126-RF.EM6 (6) Date: 2025-05-20

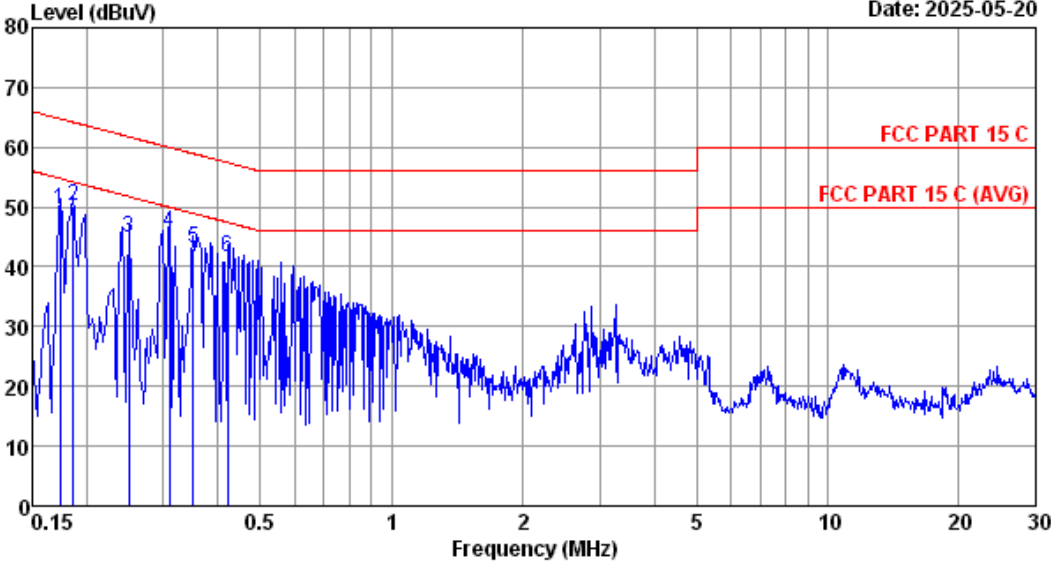

Site no :1# CE Data No :3
 Dis./Lisn :2024 ENV216-N
 Limit :FCC PART 15 C
 Env./Ins. :23.7°C/50% Engineer :Hongjie
 Power Rating :
 Test Mode :EDR TX MODE

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.174	9.77	0.01	39.69	49.47	64.77	15.30	QP
2	0.186	9.77	0.01	40.31	50.09	64.20	14.11	QP
3	0.249	9.78	0.01	35.16	44.95	61.78	16.83	QP
4	0.310	9.78	0.01	35.97	45.76	59.97	14.21	QP
5	0.350	9.78	0.01	33.26	43.05	58.96	15.91	QP
6	0.421	9.78	0.01	31.97	41.76	57.42	15.66	QP

Remarks: 1.Emission Level=LISN Factor+Cable Loss+Reading.
 2.If the average limit is met when using a quasi-peak detector,
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.

4. RADIATED EMISSION TEST

4.1. Test Equipments

Frequency range: 30~1000MHz

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	3m Chamber (NSA)	AUDIX	N/A	N/A	Aug.11,22	3 Year
2.	3m Chamber (SE)	AUDIX	N/A	N/A	Sep.16,22	3 Year
3.	Signal Analyzer	Rohde & Schwarz	FSV40	101608	Nov.07,24	1 Year
4.	Tri-log-Broadband Antenna	SCHWARZBECK	VULB 9168	01313	Sep.26,24	1 Year
5.	NSA Cable	HUBER+SUHNER	CFD400NL-LW	No.3+190411	Sep.13,24	1 Year
6.	Coaxial Switch	Anritsu	MP59B	6201397223	Mar.10,25	1 Year
7.	EMI Test Receiver	Rohde & Schwarz	ESR3	101931	Mar.10,25	1 Year
8.	Amplifier	HP	8447D	2944A11159	Mar.10,25	1 Year
9.	Test Software	AUDIX	e3	6.100913a	N/A	N/A

Note: N/A means Not applicable.


Frequency range: above 1000MHz

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	3mChamber (Svswr)	AUDIX	N/A	N/A	Aug.09,22	3 Year
2.	3mChamber (SE)	AUDIX	N/A	N/A	Sep.16,22	3 Year
3.	Signal Analyzer	Rohde & Schwarz	FSV40	101608	Nov.07,24	1 Year
4.	Amplifier	Agilent	83017A	MY53270084	Sep.15,24	1 Year
5.	RF Cable	TIMES MICROWAVE	SFT205-NMSM-10.00M	689241	Aug.13,24	1 Year
6.	Test Software	AUDIX	e3	6.100913a	N/A	N/A
7.	Horn Antenna	ETC	MCTD 1209	DRH15F03007	Sep.08,24	1 Year


Note: N/A means Not applicable.

4.2. Block Diagram of Test Setup

For frequency range 30MHz-1000MHz

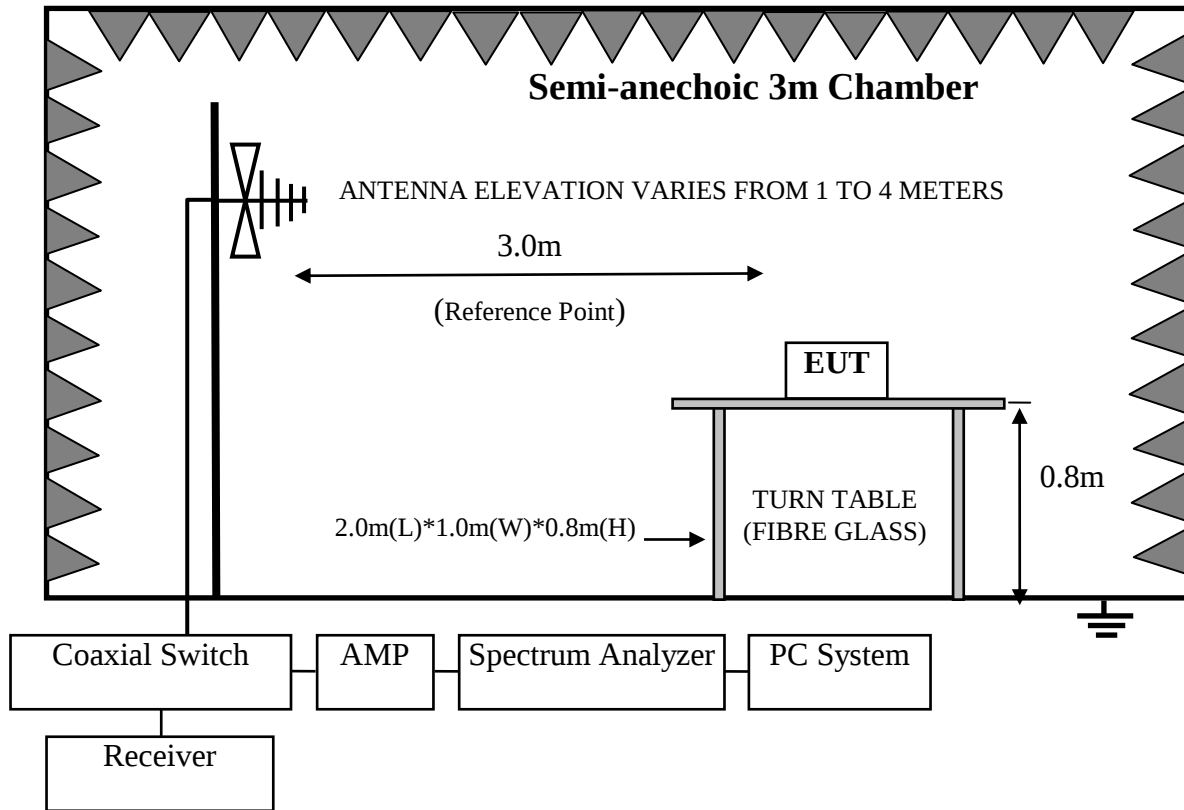

For frequency range above 1GHz

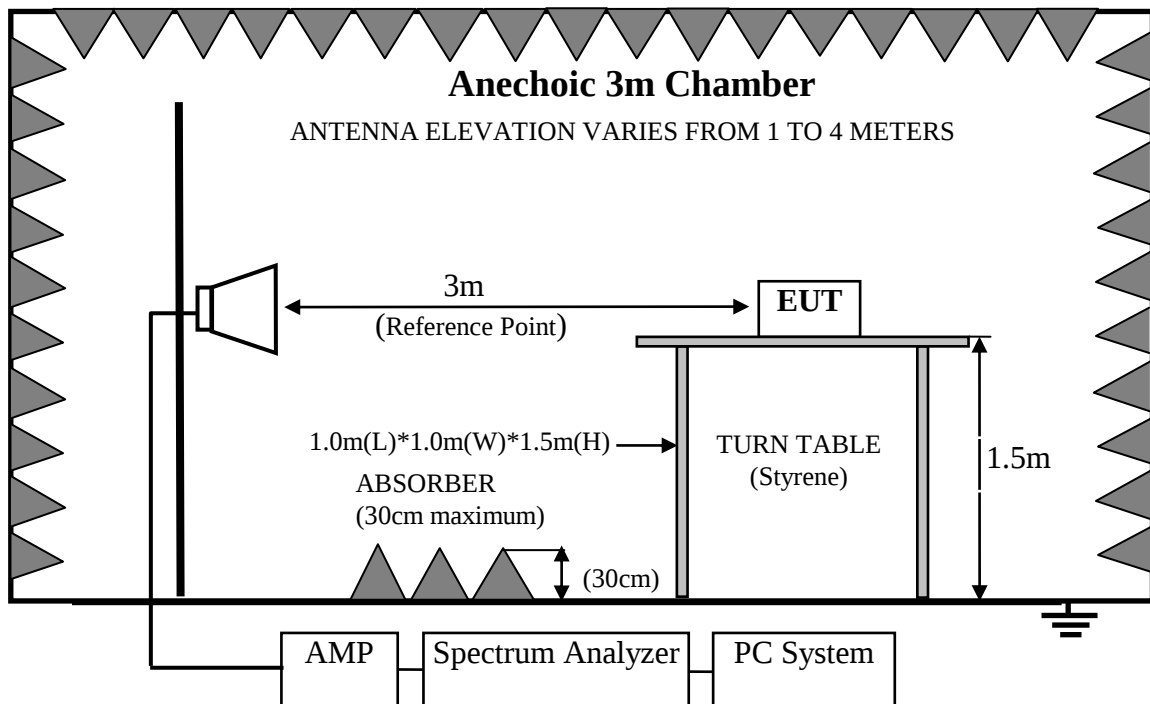

4.3. Radiated Emission Limits Standard:

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V/m}$	$\text{dB}(\mu\text{V})/\text{m}$
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000MHz	3	74.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 54.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average)	

- Remark :
- (1) Emission Level ($\text{dB}\mu\text{V}/\text{m}$) = Reading (Receiver) ($\text{dB}\mu\text{V}$) + Antenna Factor (dB/m) + Cable Loss (dB)
Emission Level ($\text{dB}\mu\text{V}/\text{m}$) = Reading (Spectrum) ($\text{dB}\mu\text{V}$) + Antenna Factor (dB/m) – Amp Factor (dB) + Cable Loss (dB)(above 1000MHz)
 - (2) The smaller limits shall apply at the cross point between two frequency bands.
 - (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.
 - (4) The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

4.4. EUT Configuration on Test

The following equipment are installed on Radiated Emission Test to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

4.4.1. Pocket TrapMan (EUT)

Model Number : PT3
Serial Number : N/A

4.5. Operating Condition of EUT

- 4.5.1. Setup the EUT and simulator as shown as Section 4.2.
- 4.5.2. Turn on the power of all equipments.
- 4.5.3. Let EUT work in Tx mode.

4.6. Test Procedure

Frequency below 30MHz:

The EUT setup on the turn table which has 0.8 m height to the ground. The turn table rotated 360 degrees and antenna fixed to 1 m to find the maximum emission level. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10 regulation.

Frequency Above 30MHz:

EUT and its simulators are placed on a turn table, which is 0.8 meter high above ground for frequency 30MHz~1000MHz, 1.5 meter high above ground for frequency above 1GHz and put the absorbing with 2.4m(L)*2.4m(W)*0.3m(H) on the ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. Power on the EUT and let it working in test mode, then test it. EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna for frequency 30MHz~1000MHz, and the Horn antenna is used as receiving antenna for frequency above 1GHz. Both horizontal and vertical polarization of the antenna is set on Test. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.10 on radiated emission Test

The bandwidth of the EMI test receiver (R&S ESR3) is set at 120kHz for frequency range from 30MHz to 1000 MHz.

The bandwidth of the Spectrum's RBW is set at 1MHz and VBW is set at 3MHz for peak emissions measurement above 1GHz

This device is pulse Modulated, a duty cycle factor was used to calculated average level based measured peak level.

The frequency range from 30MHz to 10th harmonic (25GHz) are checked. and no any emissions were found from 18GHz to 25 GHz, So the radiated emissions from 18GHz to 25GHz were not record.

4.7. Radiated Emission Test Results

PASS.



All the emissions from 30MHz to 25GHz were comply with the 15.209 Limit.

Note 1: The duty cycle factor for calculate average level is -30.648dB, and average limit is 20dB below peak limit, so if peak measured level comply with average limit, the average level was deemed to comply with average limit.


Note 2: The emissions (9kHz~30MHz) not reported for there is no emission be found.

Duty cycle factor = $20\log(\text{Dwell time}/100\text{ms}) = -30.648\text{dB}$

Dwell Time = $2.935 \times 1\text{ms}$

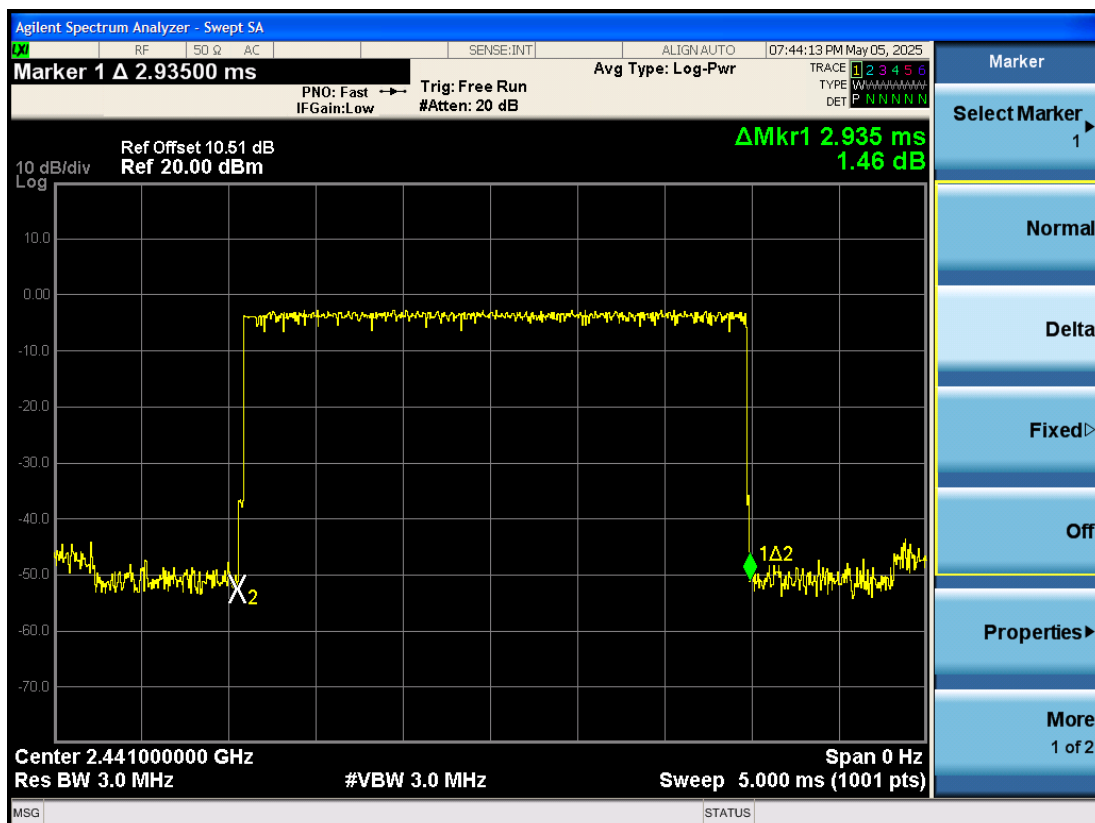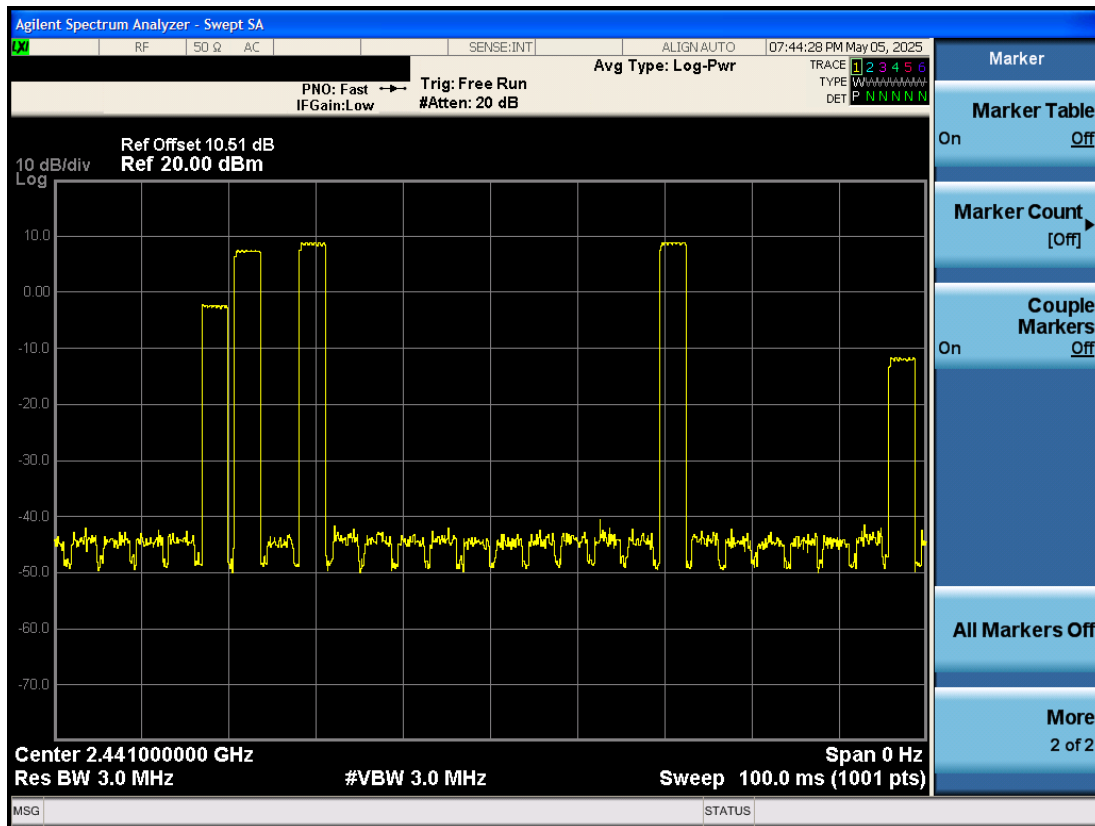


Frequency: 30MHz~1GHz

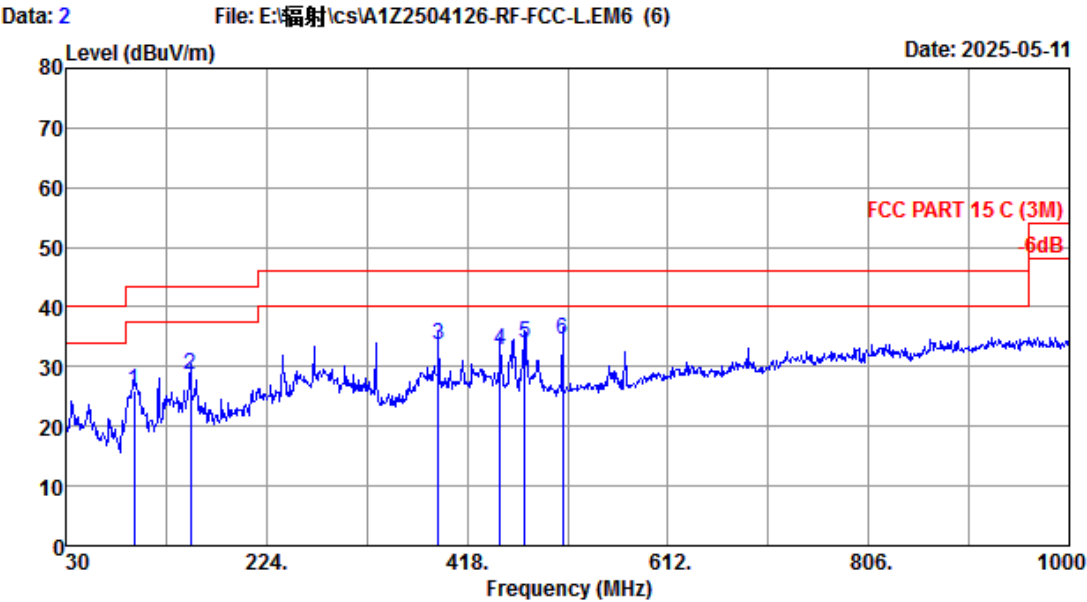

Site no. : 3m Chamber Data no. : 2
 Dis. / Ant. : 3m 2024 VULB 9168-01313 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 C (3M)
 Env. / Ins. : 22.3°C/50% Engineer : Epoch
 EUT :
 Power rating :
 Test Mode : BDR TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	95.960	14.60	1.11	10.23	25.94	43.50	17.56	QP
2	150.280	19.40	1.36	7.74	28.50	43.50	15.00	QP
3	389.870	21.20	2.73	9.66	33.59	46.00	12.41	QP
4	450.010	23.10	3.03	6.73	32.86	46.00	13.14	QP
5	473.290	23.30	3.13	7.64	34.07	46.00	11.93	QP
6	510.150	23.70	3.30	7.64	34.64	46.00	11.36	QP


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

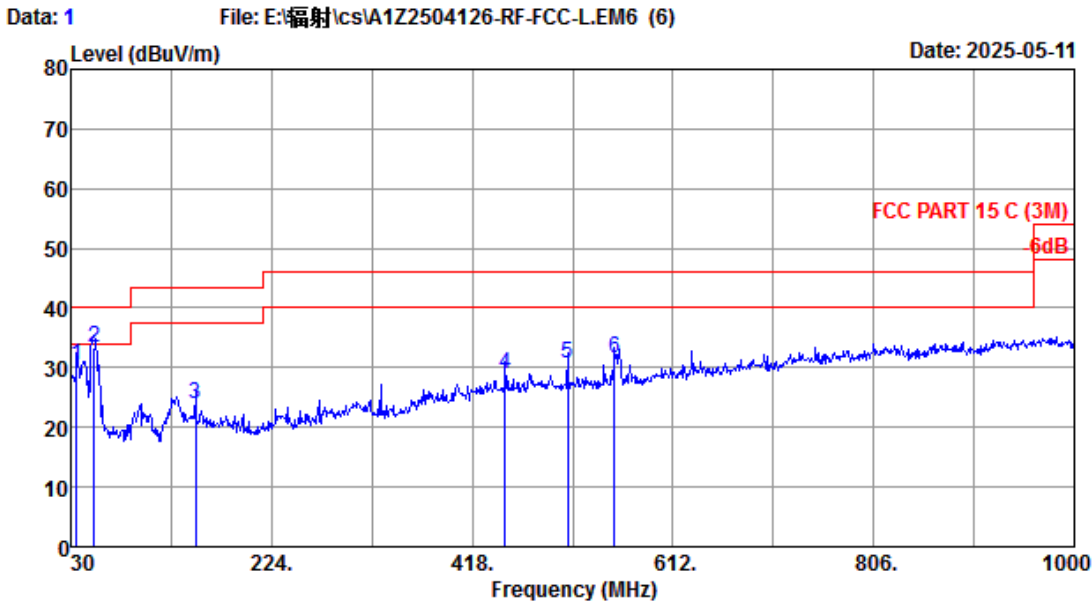

Site no. : 3m Chamber Data no. : 1
 Dis. / Ant. : 3m 2024 VULB 9168-01313 Ant. pol. : VERTICAL
 Limit : FCC PART 15 C (3M)
 Env. / Ins. : 22.3°C/50% Engineer : Epoch
 EUT :
 Power rating :
 Test Mode : BDR TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	35.820	18.70	0.72	11.11	30.53	40.00	9.47	QP
2	52.310	19.90	0.84	12.58	33.32	40.00	6.68	QP
3	150.280	19.40	1.36	3.08	23.84	43.50	19.66	QP
4	450.010	23.10	3.03	2.85	28.98	46.00	17.02	QP
5	510.150	23.70	3.30	3.57	30.57	46.00	15.43	QP
6	555.740	24.81	3.47	3.21	31.49	46.00	14.51	QP


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

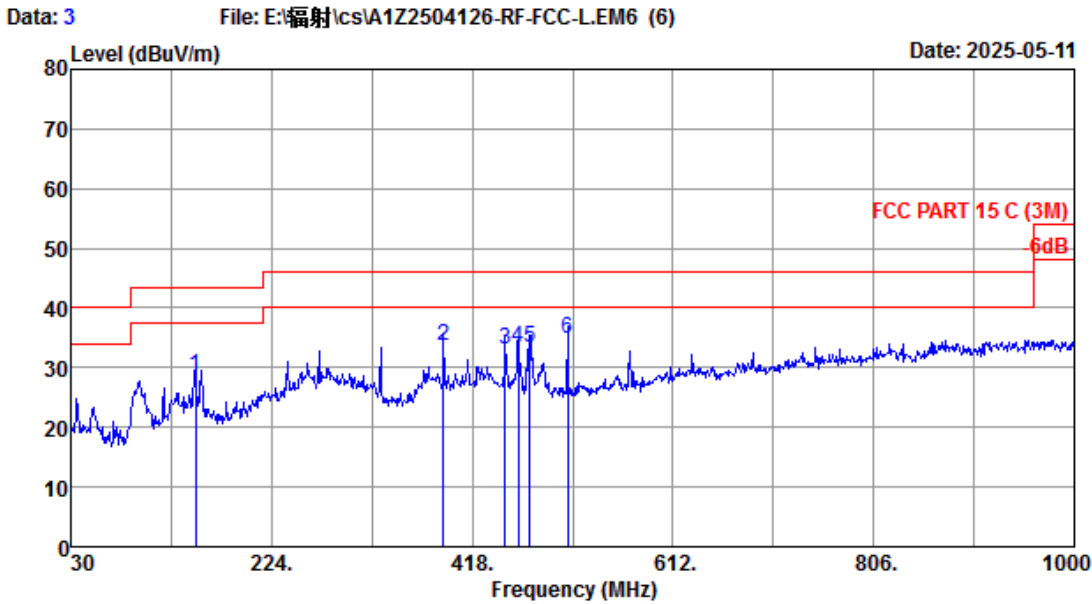

Site no. : 3m Chamber Data no. : 3
 Dis. / Ant. : 3m 2024 VULB 9168-01313 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 C (3M)
 Env. / Ins. : 22.3°C/50% Engineer : Epoch
 EUT :
 Power rating :
 Test Mode : EDR TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	150.280	19.40	1.36	8.01	28.77	43.50	14.73	QP
2	389.870	21.20	2.73	9.84	33.77	46.00	12.23	QP
3	450.010	23.10	3.03	6.88	33.01	46.00	12.99	QP
4	462.620	23.00	3.08	7.17	33.25	46.00	12.75	QP
5	473.290	23.30	3.13	6.94	33.37	46.00	12.63	QP
6	510.150	23.70	3.30	7.91	34.91	46.00	11.09	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

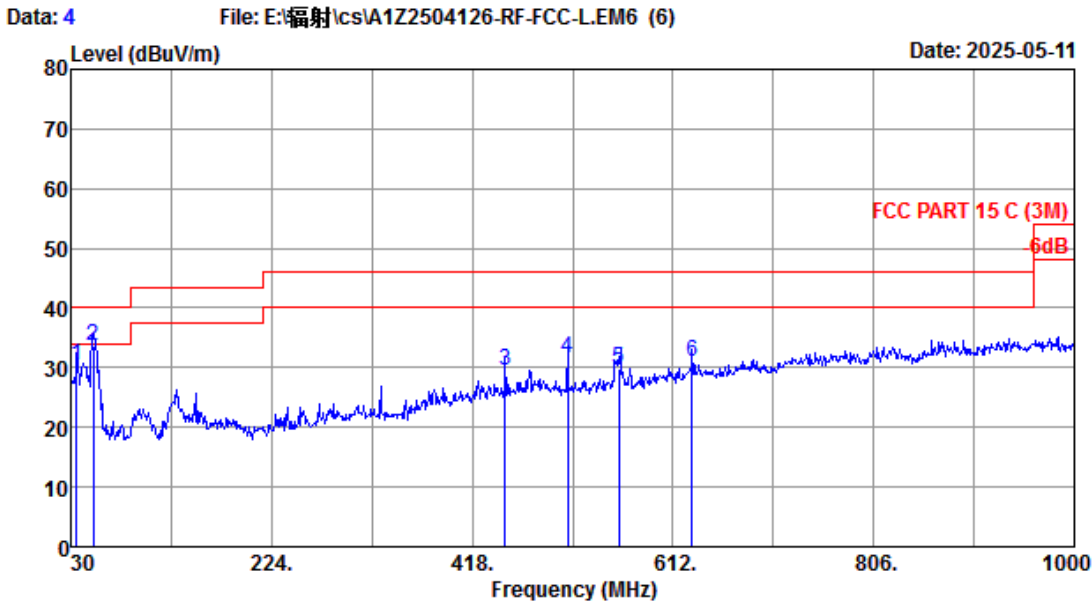


Site no. : 3m Chamber Data no. : 4
 Dis. / Ant. : 3m 2024 VULB 9168-01313 Ant. pol. : VERTICAL
 Limit : FCC PART 15 C (3M)
 Env. / Ins. : 22.3°C/50% Engineer : Epoch
 EUT :
 Power rating :
 Test Mode : EDR TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	35.820	18.70	0.72	11.01	30.43	40.00	9.57	QP
2	51.340	19.97	0.84	12.96	33.77	40.00	6.23	QP
3	450.010	23.10	3.03	3.47	29.60	46.00	16.40	QP
4	510.150	23.70	3.30	4.53	31.53	46.00	14.47	QP
5	559.620	24.89	3.49	1.56	29.94	46.00	16.06	QP
6	630.430	26.42	3.79	0.82	31.03	46.00	14.97	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.


Frequency: 1GHz~18GHz

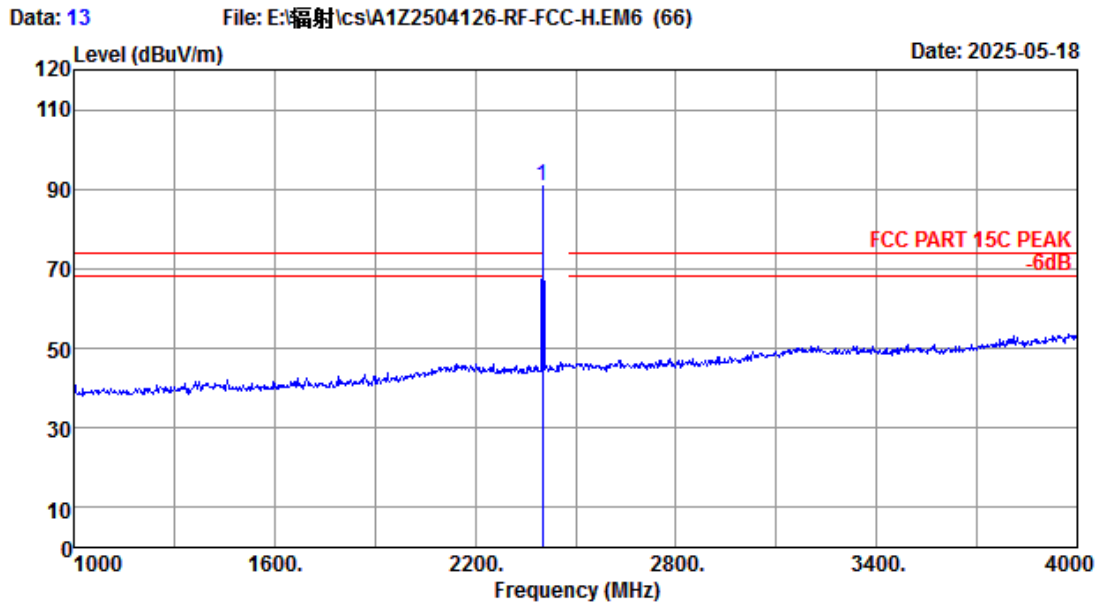


Site no. : RF Chamber Data no. : 13
 Dis. / Ant. : 3m 2024 MCTD1209-3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Engineer : Epoch
 Env. / Ins. : 22.3°C/50%
 Test Mode : GFSK 2402MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.000	27.60	4.58	49.64	108.39	90.93	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

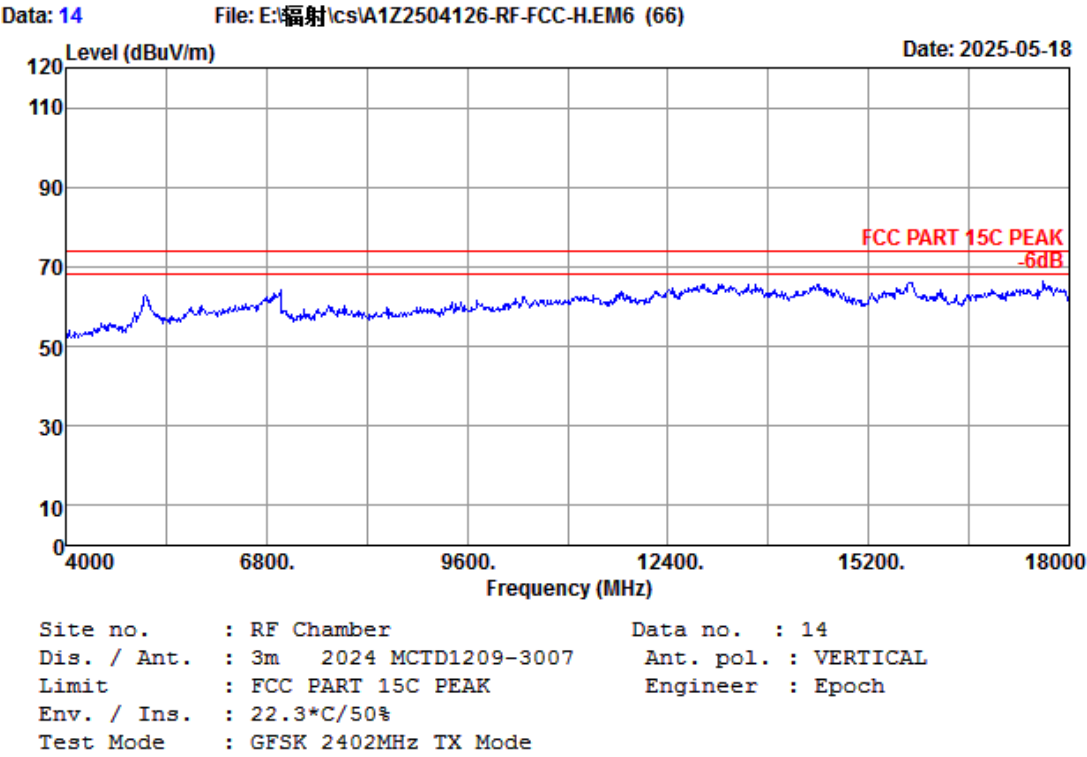


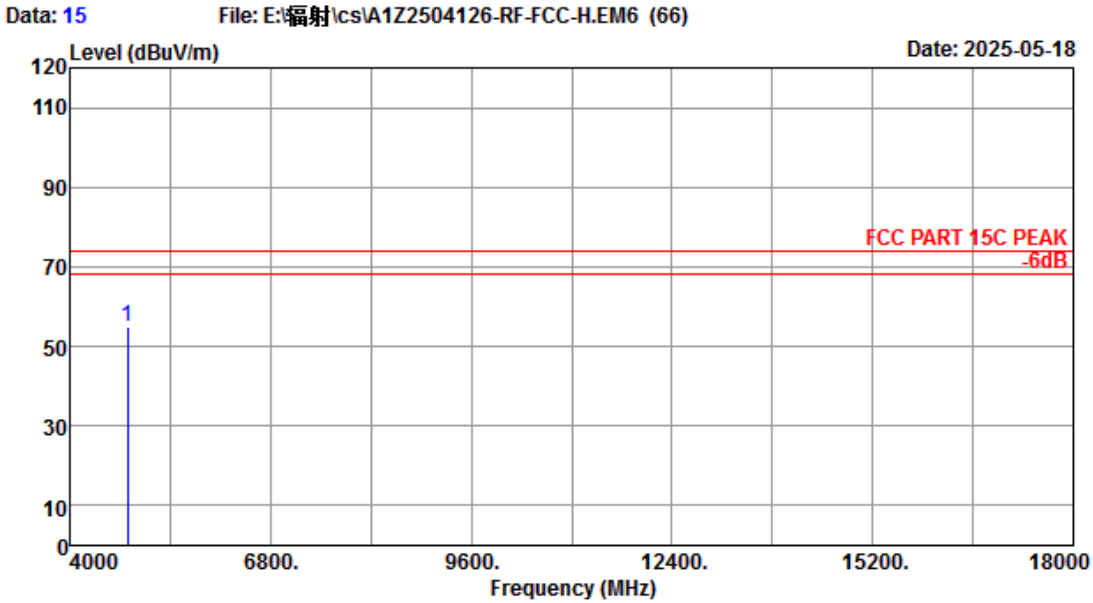

Site no. : RF Chamber Data no. : 15
 Dis. / Ant. : 3m 2024 MCTD1209-3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Engineer : Epoch
 Env. / Ins. : 22.3°C/50%
 Test Mode : GFSK 2402MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4804.000	31.92	6.59	48.18	64.54	54.87	74.00	19.13	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

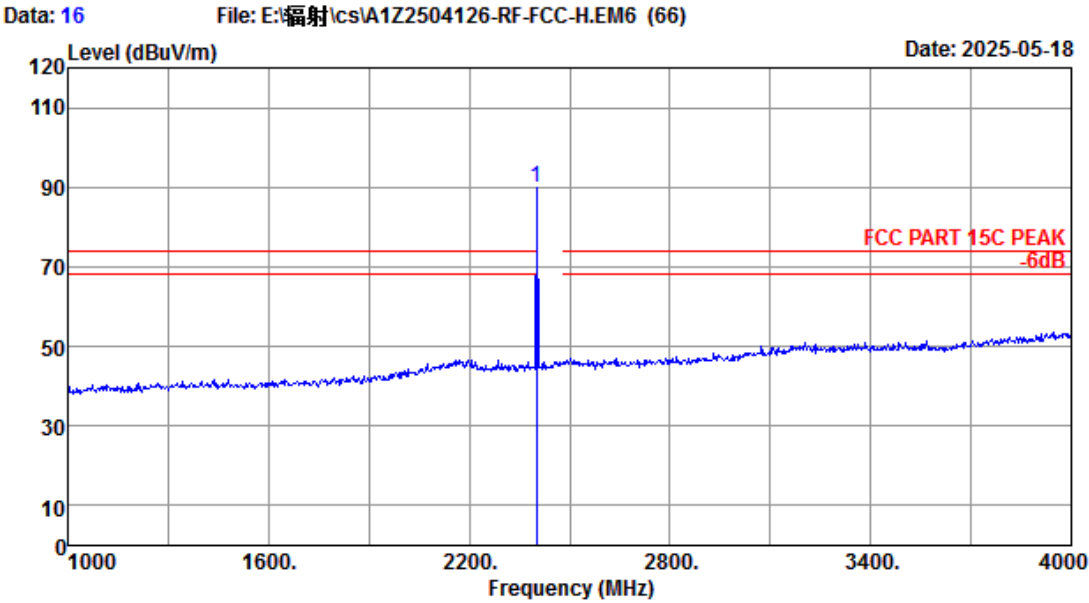


Site no.	: RF Chamber	Data no.	: 16
Dis. / Ant.	: 3m 2024 MCTD1209-3007	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK	Engineer	: Epoch
Env. / Ins.	: 22.3°C/50%		
Test Mode	: GFSK 2402MHz TX Mode		


No.	Freq. (MHz)	Ant.	Cable	AMP	Reading (dBuV)	Emission			Margin	Remark
		Factor (dB/m)	Loss (dB)	factor (dB)		Level (dBuV/m)	Limits (dBuV/m)			
1	2402.000	27.60	4.58	49.64	107.43	89.97	-----	-----	Peak	

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp Factor

2. The emission levels that are 20dB below the official
limit are not reported.

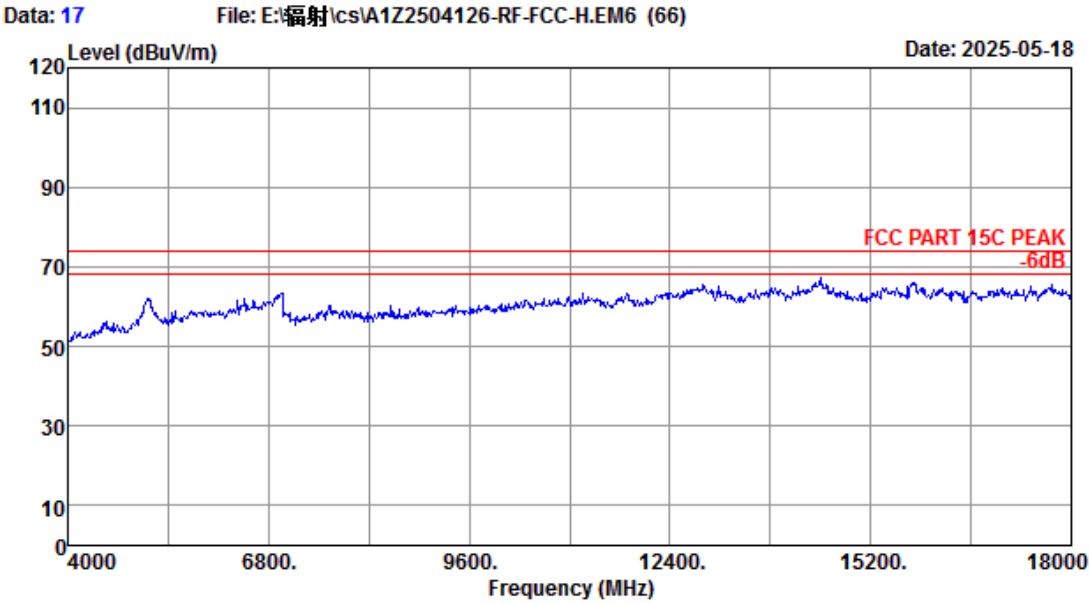


Site no.	: RF Chamber	Data no.	: 17
Dis. / Ant.	: 3m 2024 MCTD1209-3007	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK	Engineer	: Epoch
Env. / Ins.	: 22.3°C/50%		
Test Mode	: GFSK 2402MHz TX Mode		

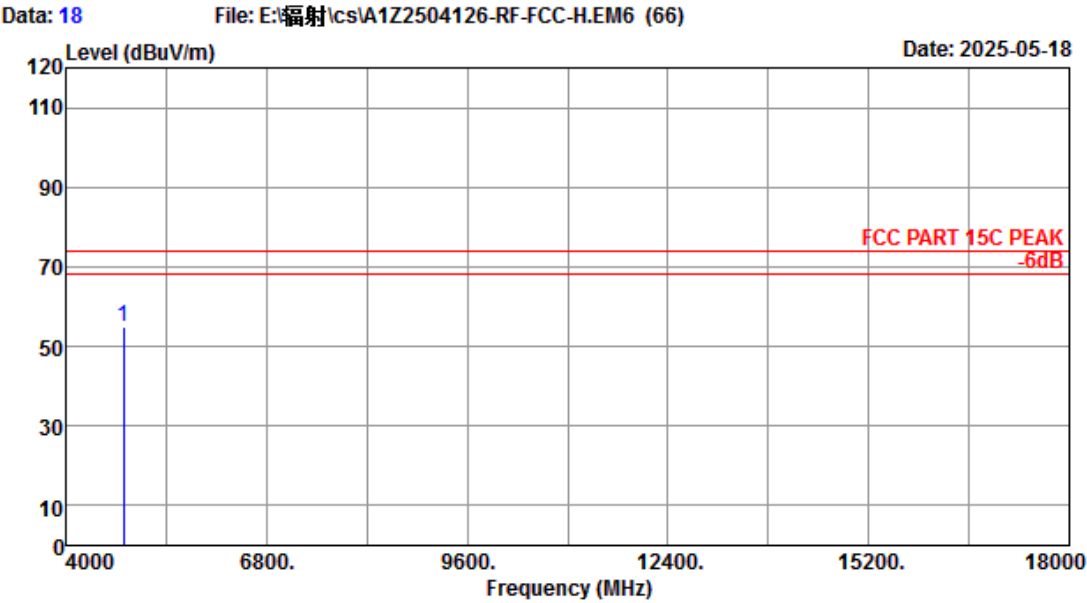

Site no. : RF Chamber Data no. : 18
 Dis. / Ant. : 3m 2024 MCTD1209-3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Engineer : Epoch
 Env. / Ins. : 22.3°C/50%
 Test Mode : GFSK 2402MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4804.000	31.92	6.59	48.18	64.52	54.85	74.00	19.15	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

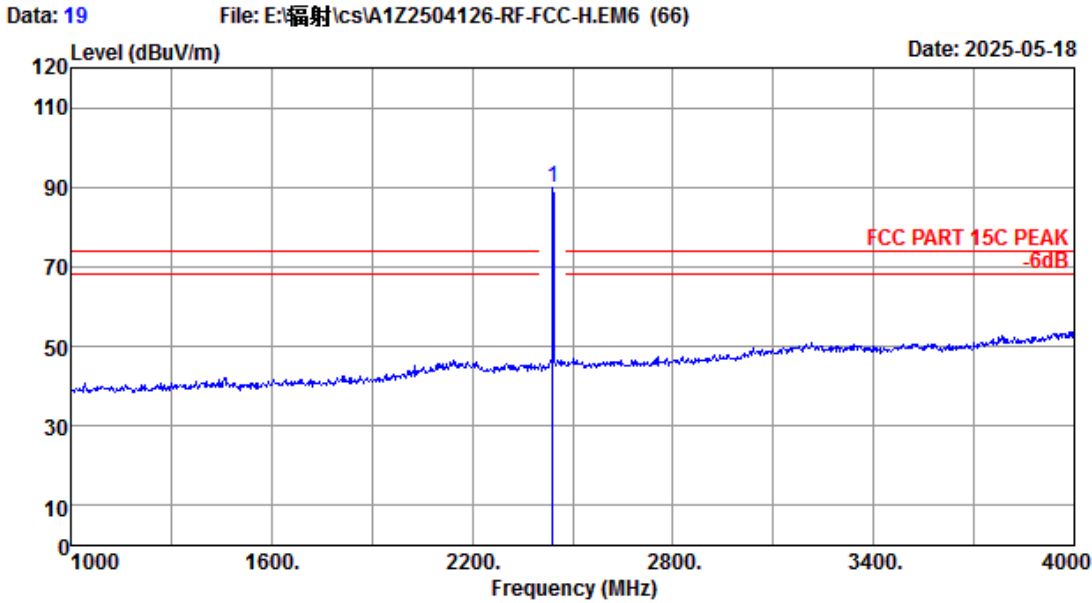


Site no.	: RF Chamber	Data no.	: 19
Dis. / Ant.	: 3m 2024 MCTD1209-3007	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK	Engineer	: Epoch
Env. / Ins.	: 22.3°C/50%		
Test Mode	: GFSK 2441MHz TX Mode		


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2441.000	27.60	4.64	49.60	107.19	89.83	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp Factor

2. The emission levels that are 20dB below the official
limit are not reported.

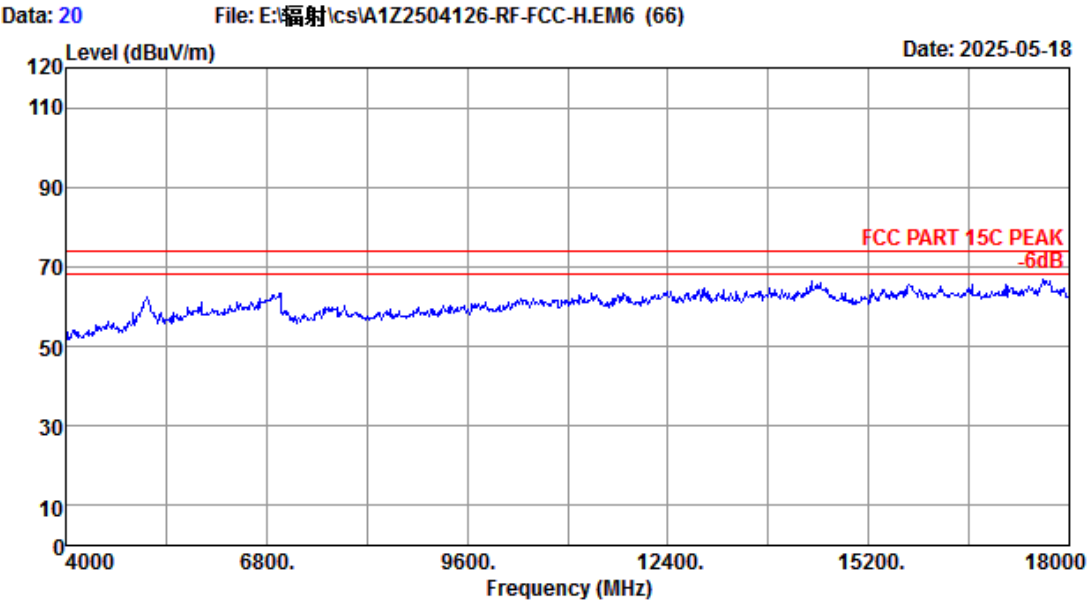


Site no.	: RF Chamber	Data no.	: 20
Dis. / Ant.	: 3m 2024 MCTD1209-3007	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK	Engineer	: Epoch
Env. / Ins.	: 22.3°C/50%		
Test Mode	: GFSK 2441MHz TX Mode		

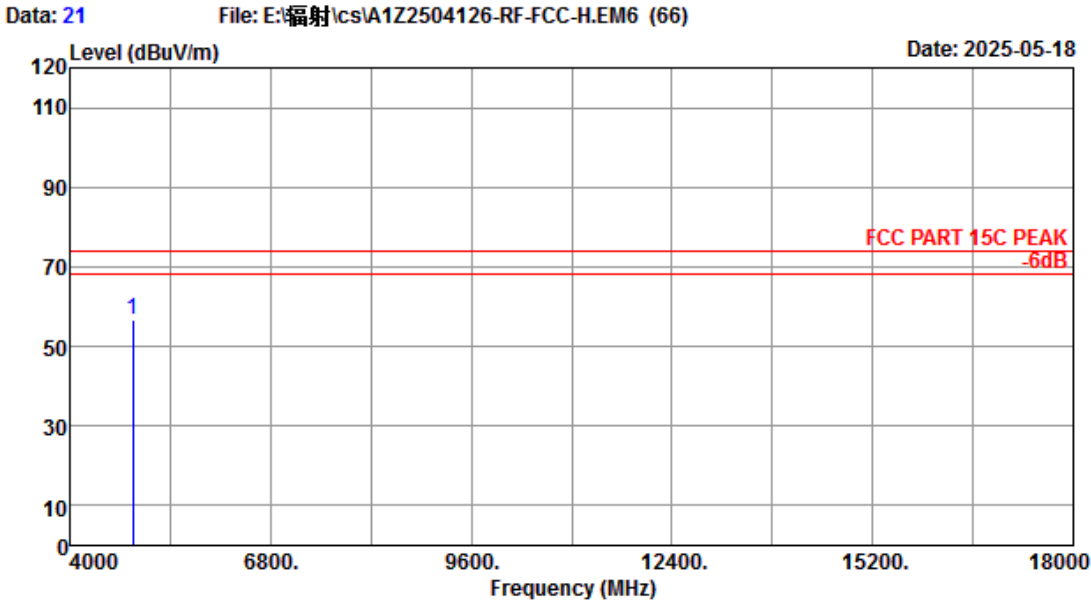

Site no. : RF Chamber Data no. : 21
 Dis. / Ant. : 3m 2024 MCTD1209-3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Engineer : Epoch
 Env. / Ins. : 22.3°C/50%
 Test Mode : GFSK 2441MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4882.000	32.55	6.63	48.19	65.48	56.47	74.00	17.53	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

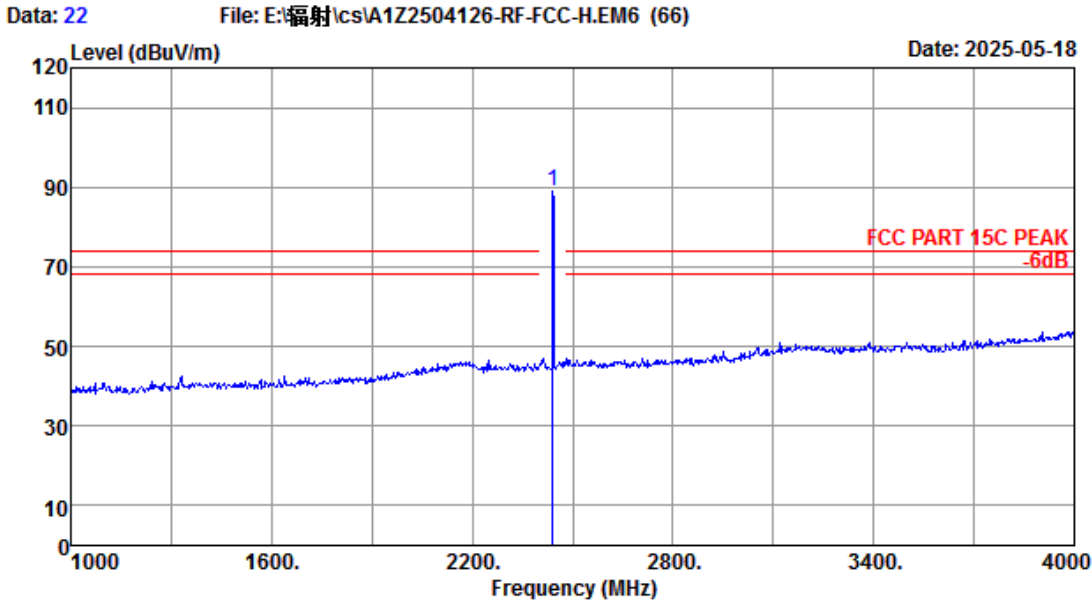


Site no. : RF Chamber Data no. : 22
 Dis. / Ant. : 3m 2024 MCTD1209-3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Engineer : Epoch
 Env. / Ins. : 22.3°C/50%
 Test Mode : GFSK 2441MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2441.000	27.60	4.64	49.60	106.38	89.02	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

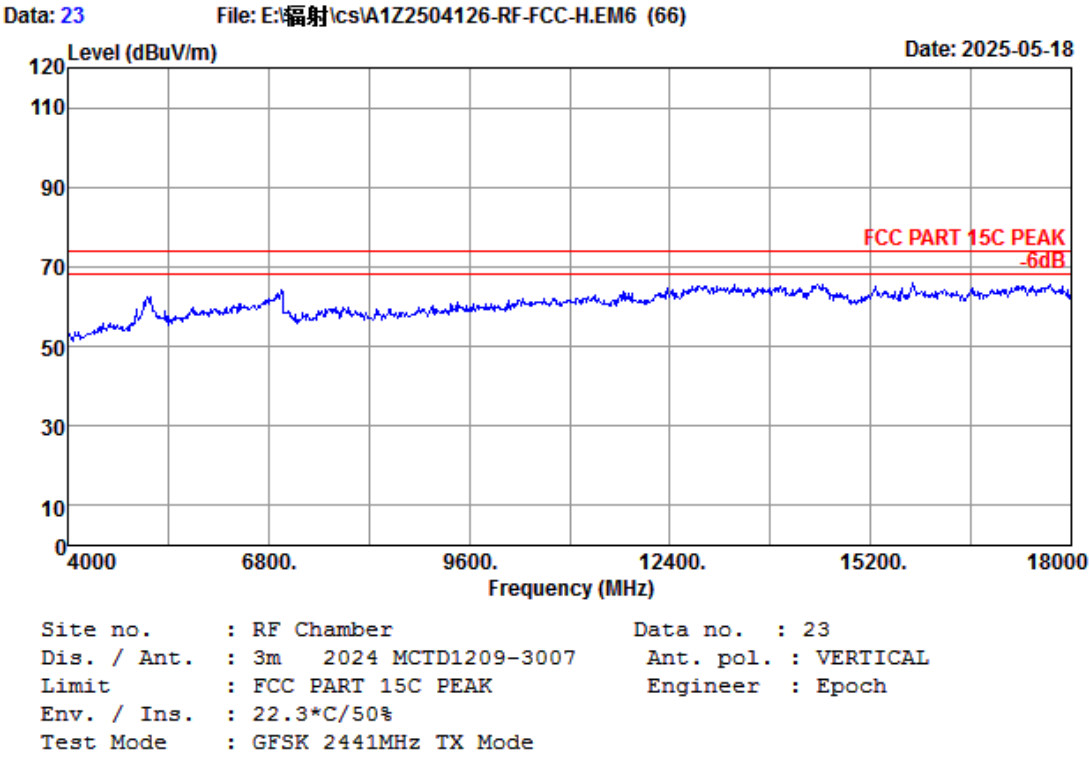


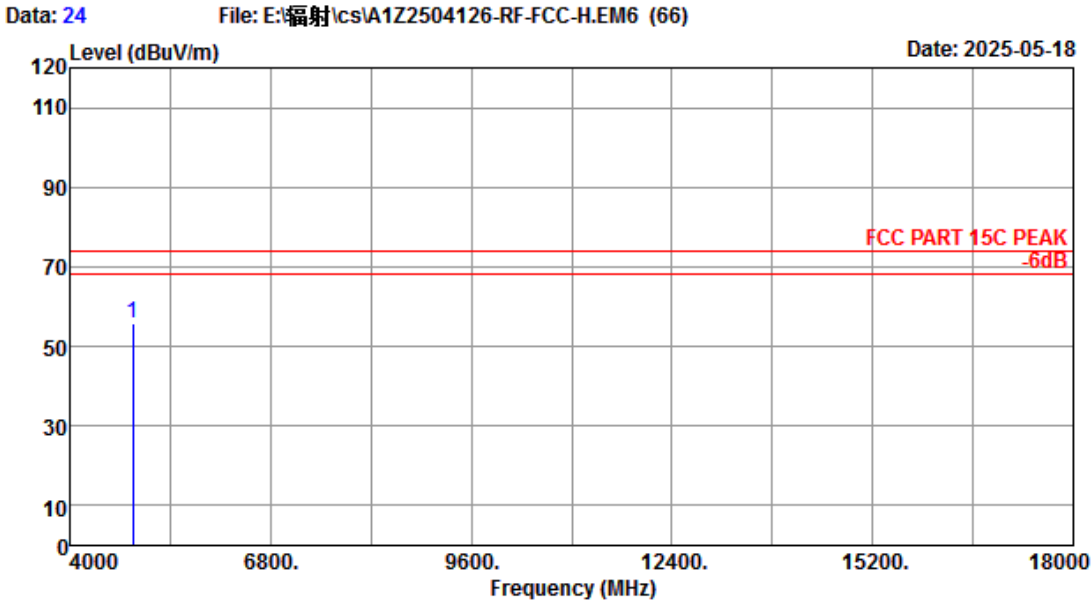

Site no. : RF Chamber Data no. : 24
 Dis. / Ant. : 3m 2024 MCTD1209-3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Engineer : Epoch
 Env. / Ins. : 22.3°C/50%
 Test Mode : GFSK 2441MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4882.000	32.55	6.63	48.19	64.62	55.61	74.00	18.39	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

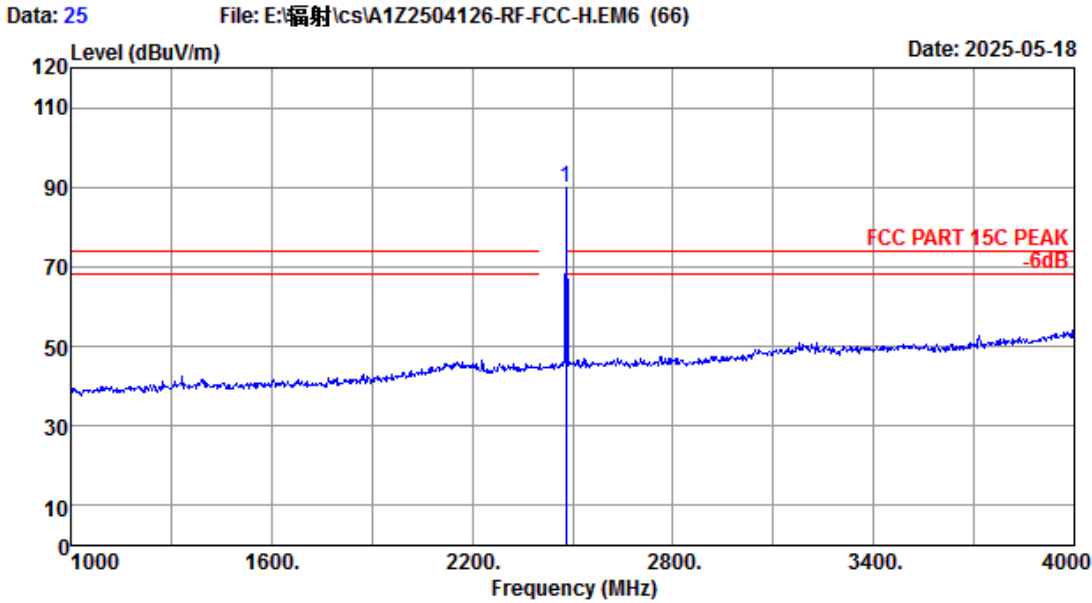


Site no. : RF Chamber Data no. : 25
 Dis. / Ant. : 3m 2024 MCTD1209-3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Engineer : Epoch
 Env. / Ins. : 22.3°C/50%
 Test Mode : GFSK 2480MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.000	27.84	4.68	49.57	107.07	90.02	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

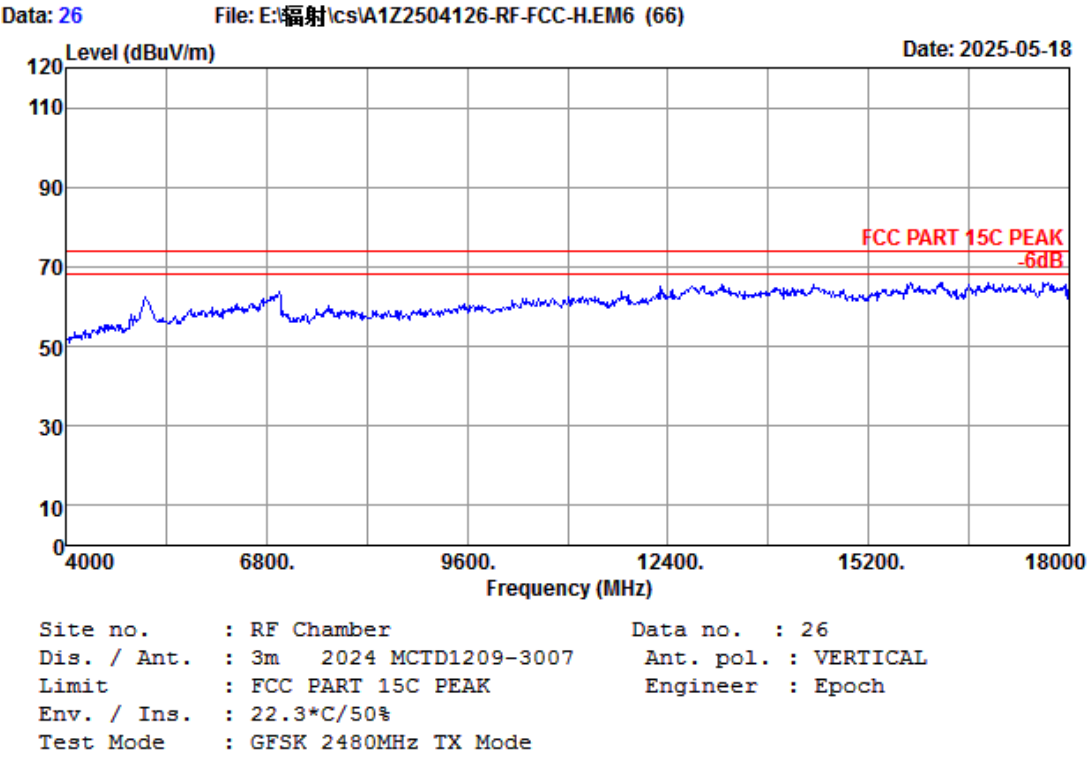


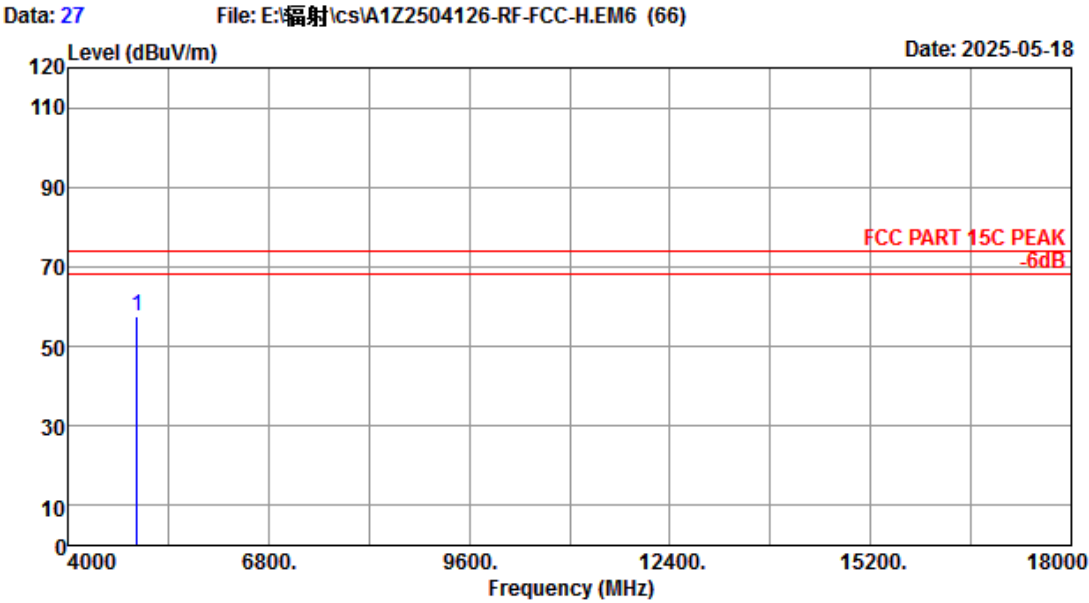

Site no. : RF Chamber Data no. : 27
 Dis. / Ant. : 3m 2024 MCTD1209-3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Engineer : Epoch
 Env. / Ins. : 22.3°C/50%
 Test Mode : GFSK 2480MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4960.000	33.60	6.68	48.20	65.35	57.43	74.00	16.57	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

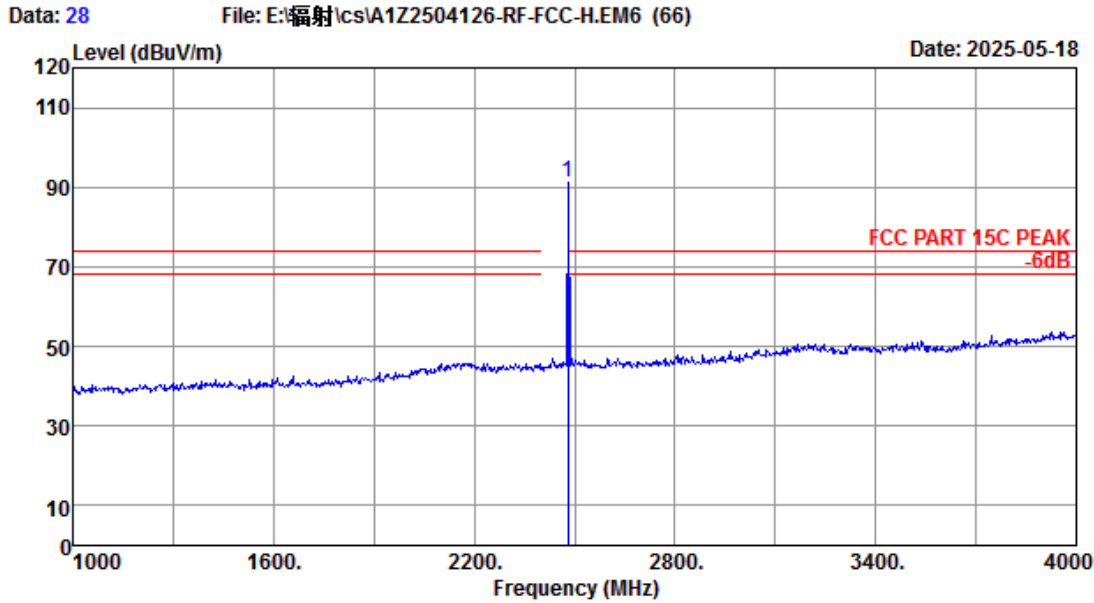



Site no.	: RF Chamber	Data no.	: 28
Dis. / Ant.	: 3m 2024 MCTD1209-3007	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK	Engineer	: Epoch
Env. / Ins.	: 22.3°C/50%		
Test Mode	: GFSK 2480MHz TX Mode		

No.	Freq. (MHz)	Ant.	Cable	AMP	Reading (dBuV)	Emission			Remark
		Factor (dB/m)	Loss (dB)	factor (dB)		Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	
1	2480.000	27.84	4.68	49.57	108.26	91.21	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp Factor

2. The emission levels that are 20dB below the official
limit are not reported.

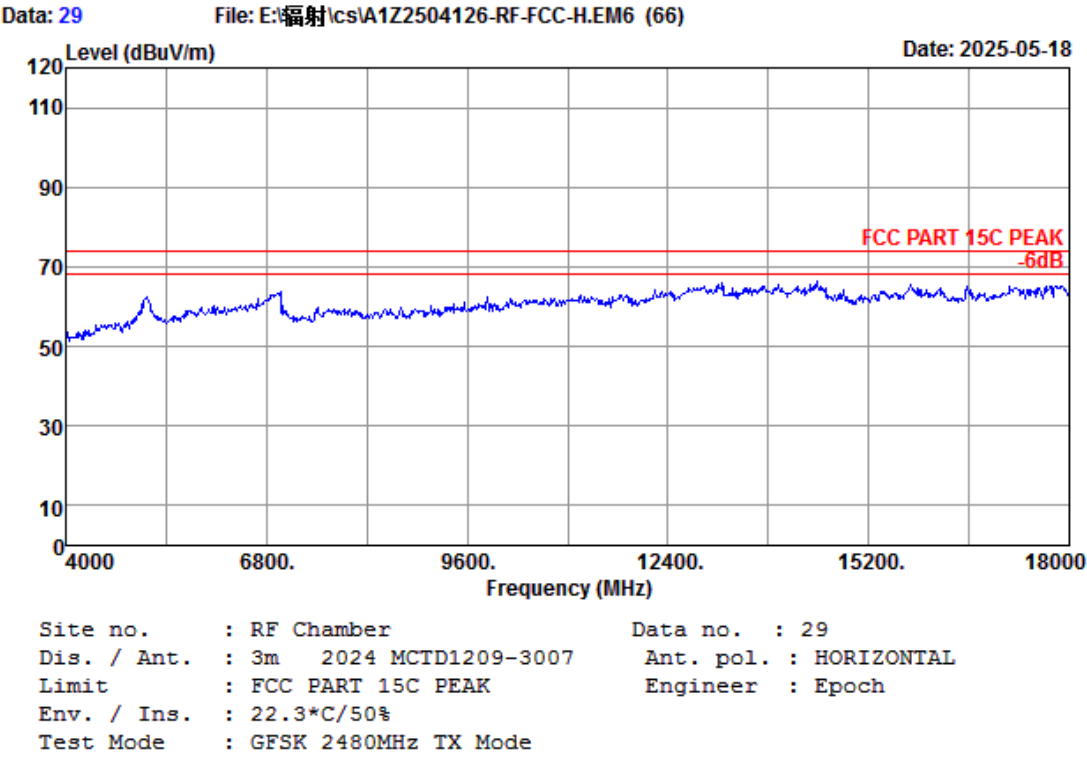


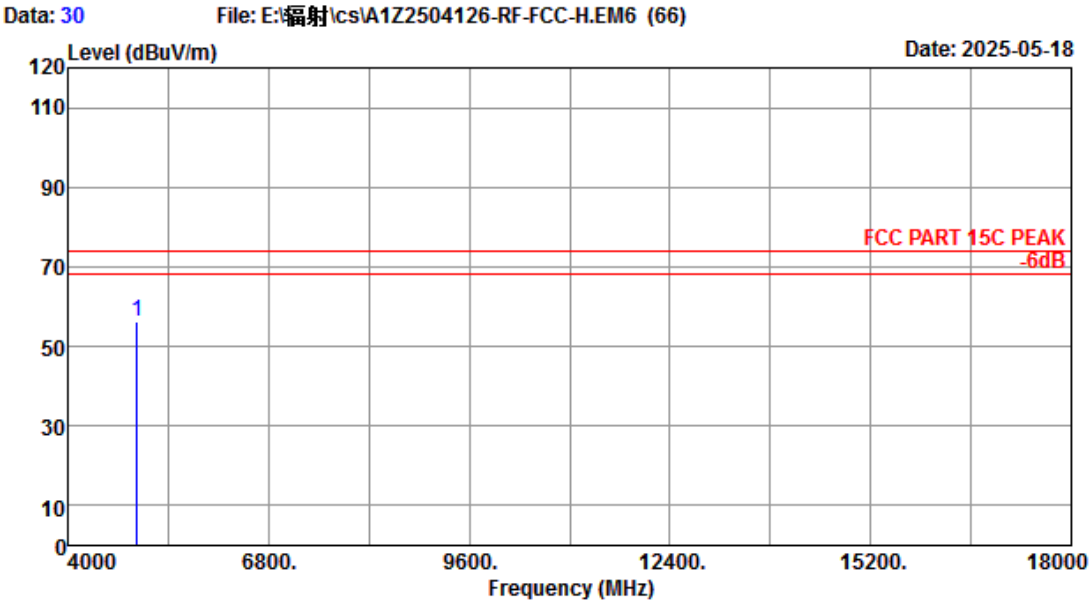

Site no.	: RF Chamber	Data no.	: 30
Dis. / Ant.	: 3m 2024 MCTD1209-3007	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK	Engineer	: Epoch
Env. / Ins.	: 22.3°C/50%		
Test Mode	: GFSK 2480MHz TX Mode		

No.	Freq. (MHz)	Ant.	Cable	AMP	Reading (dBuV)	Emission			Margin	Remark
		Factor (dB/m)	Loss (dB)	factor (dB)		Level (dBuV/m)	Limits (dBuV/m)			
1	4960.000	33.60	6.68	48.20	64.33	56.41	74.00	17.59	Peak	

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp Factor
2. The emission levels that are 20dB below the official
limit are not reported.

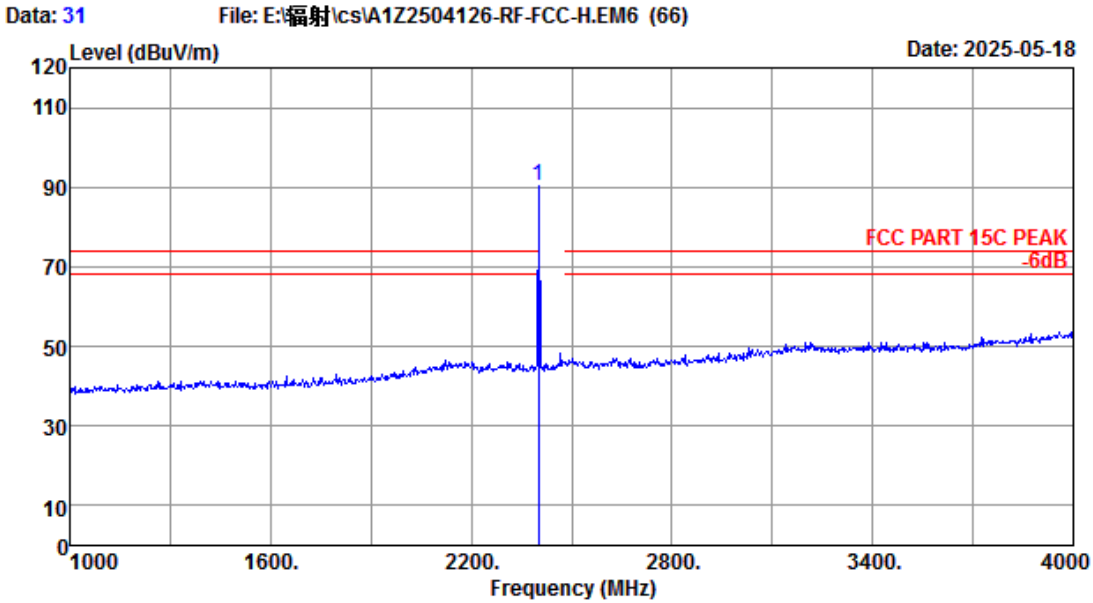



Site no.	: RF Chamber	Data no.	: 31
Dis. / Ant.	: 3m 2024 MCTD1209-3007	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK	Engineer	: Epoch
Env. / Ins.	: 22.3°C/50%		
Test Mode	: 8-DPSK 2402MHz TX Mode		

No.	Freq. (MHz)	Ant.	Cable	AMP	Reading (dBuV)	Emission			Remark
		Factor (dB/m)	Loss (dB)	factor (dB)		Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	
1	2402.000	27.60	4.58	49.64	107.68	90.22	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp Factor

2. The emission levels that are 20dB below the official limit are not reported.

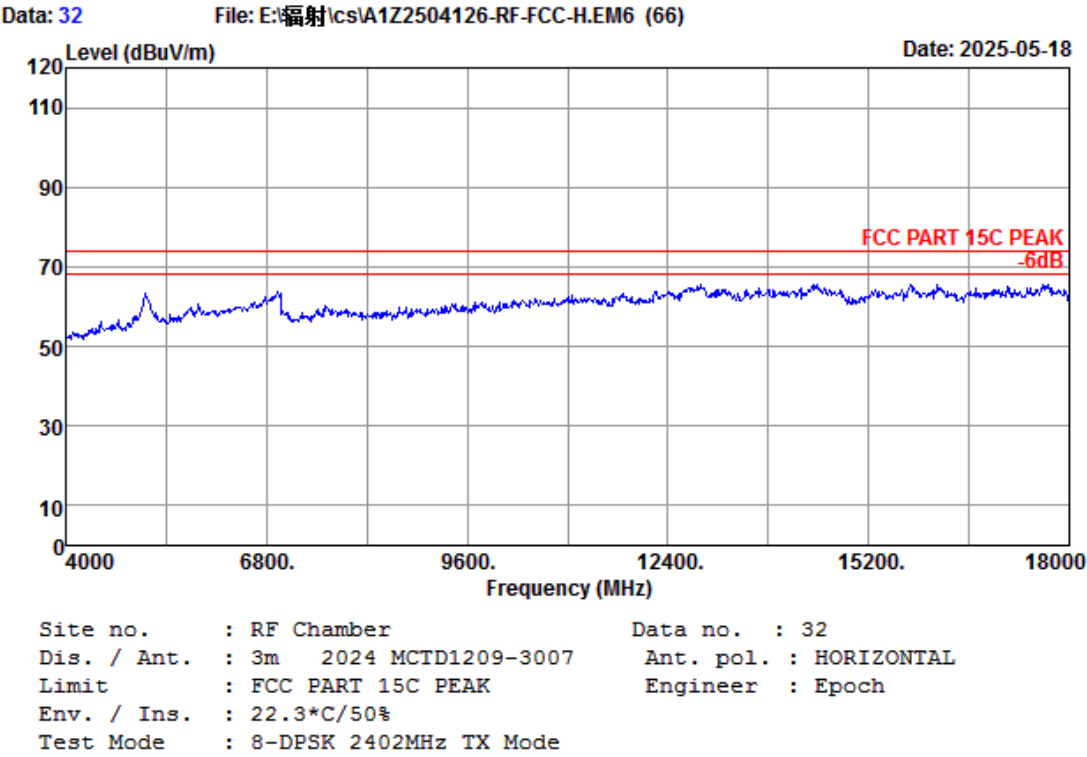


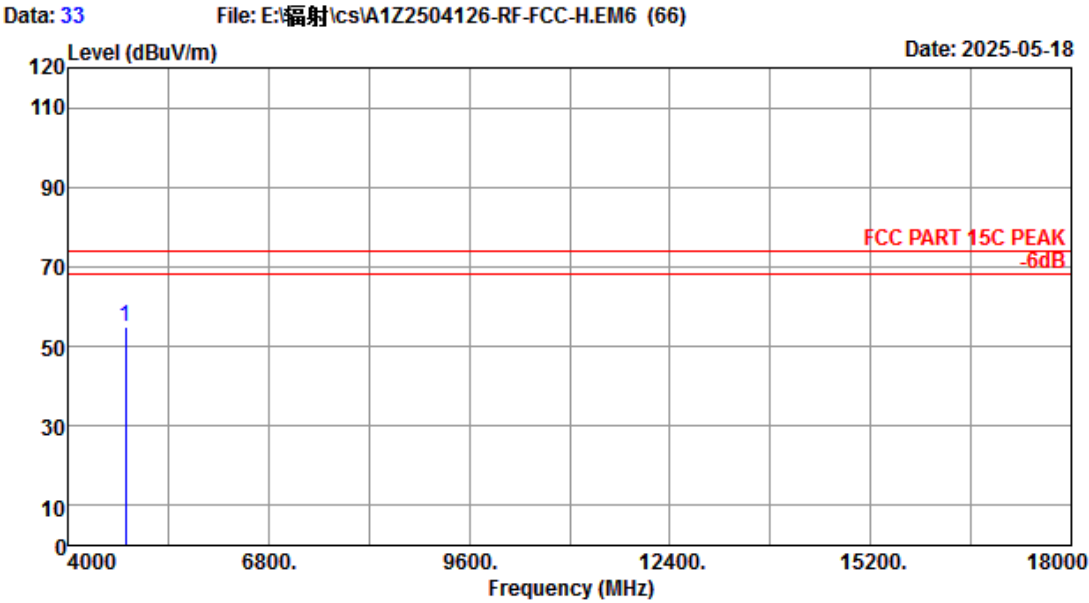

Site no. : RF Chamber Data no. : 33
 Dis. / Ant. : 3m 2024 MCTD1209-3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Engineer : Epoch
 Env. / Ins. : 22.3°C/50%
 Test Mode : 8-DPSK 2402MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4804.000	31.92	6.59	48.18	64.51	54.84	74.00	19.16	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

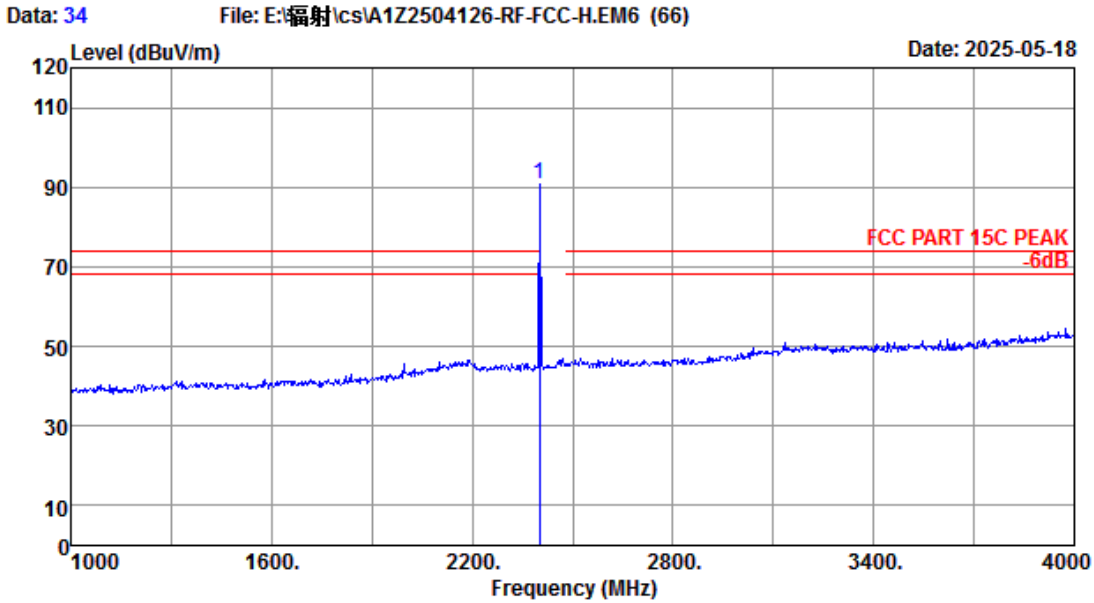



Site no.	: RF Chamber	Data no.	: 34
Dis. / Ant.	: 3m 2024 MCTD1209-3007	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK	Engineer	: Epoch
Env. / Ins.	: 22.3°C/50%		
Test Mode	: 8-DPSK 2402MHz TX Mode		

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.000	27.60	4.58	49.64	108.38	90.92	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp Factor

2. The emission levels that are 20dB below the official
limit are not reported.

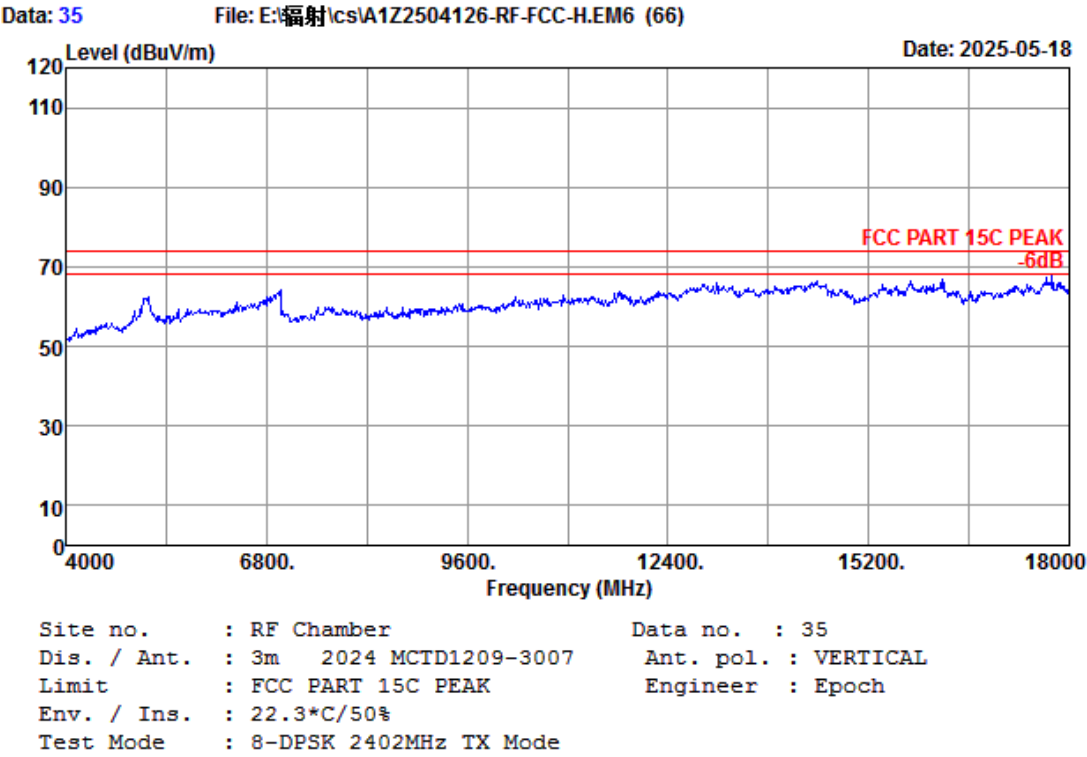


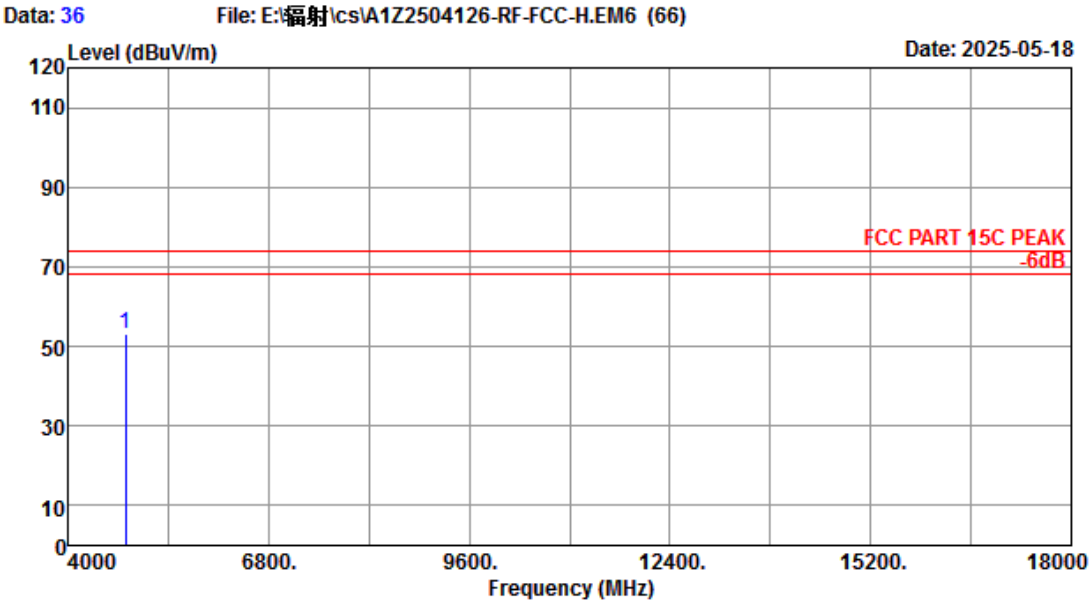

Site no. : RF Chamber Data no. : 36
 Dis. / Ant. : 3m 2024 MCTD1209-3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Engineer : Epoch
 Env. / Ins. : 22.3°C/50%
 Test Mode : 8-DPSK 2402MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4804.000	31.92	6.59	48.18	62.61	52.94	74.00	21.06	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

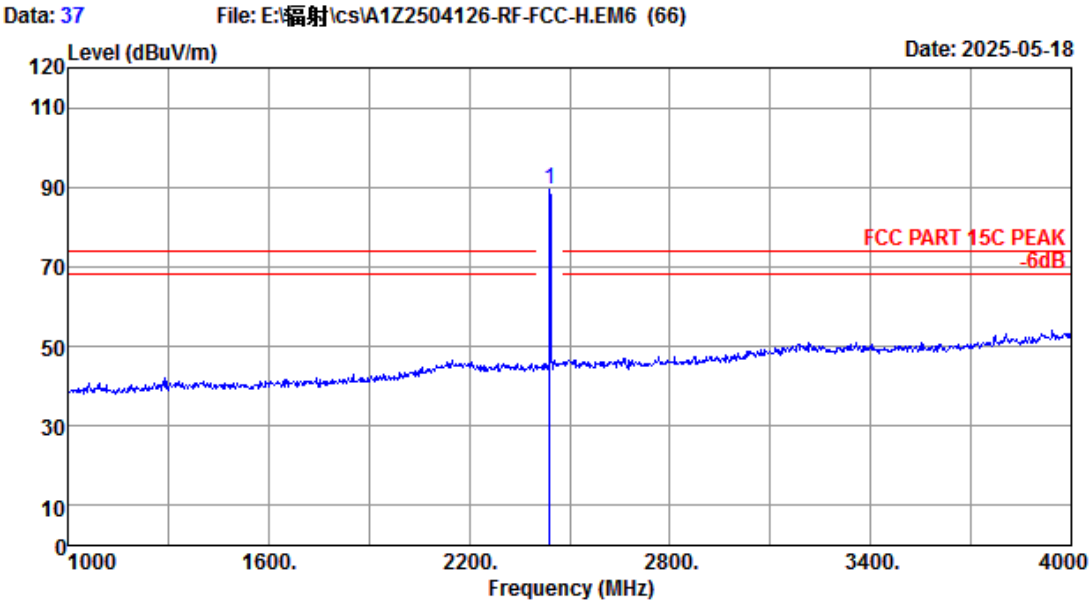


Site no. : RF Chamber Data no. : 37
 Dis. / Ant. : 3m 2024 MCTD1209-3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Engineer : Epoch
 Env. / Ins. : 22.3°C/50%
 Test Mode : 8-DPSK 2441MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2441.000	27.60	4.64	49.60	106.68	89.32	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

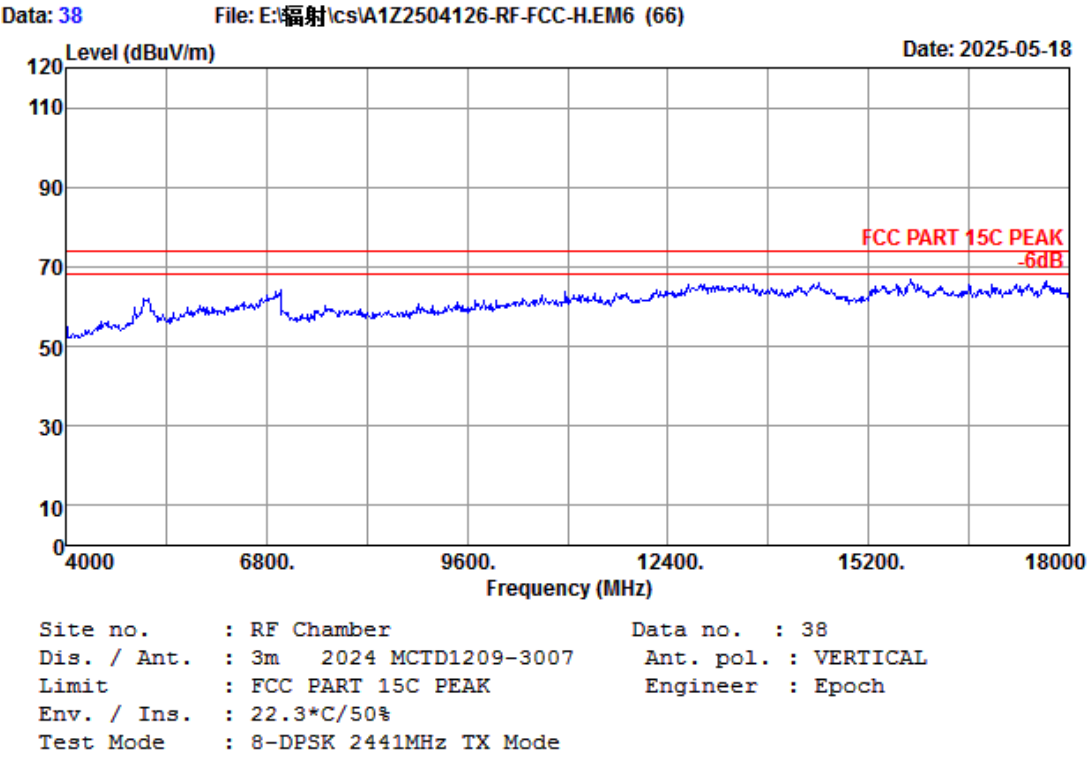


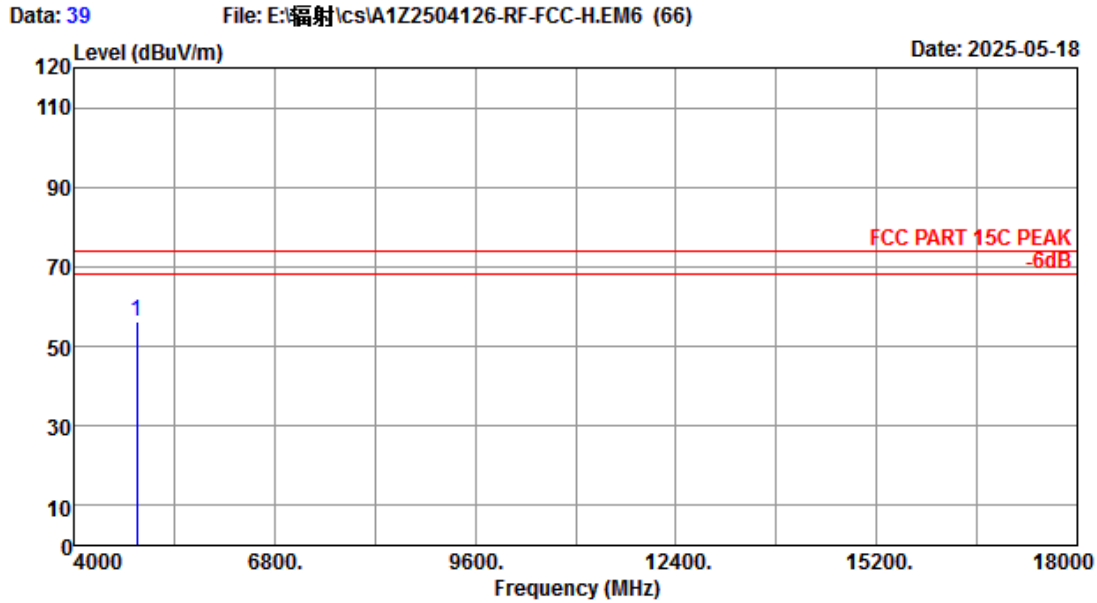

Site no. : RF Chamber Data no. : 39
 Dis. / Ant. : 3m 2024 MCTD1209-3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Engineer : Epoch
 Env. / Ins. : 22.3°C/50%
 Test Mode : 8-DPSK 2441MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4882.000	32.55	6.63	48.19	65.37	56.36	74.00	17.64	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

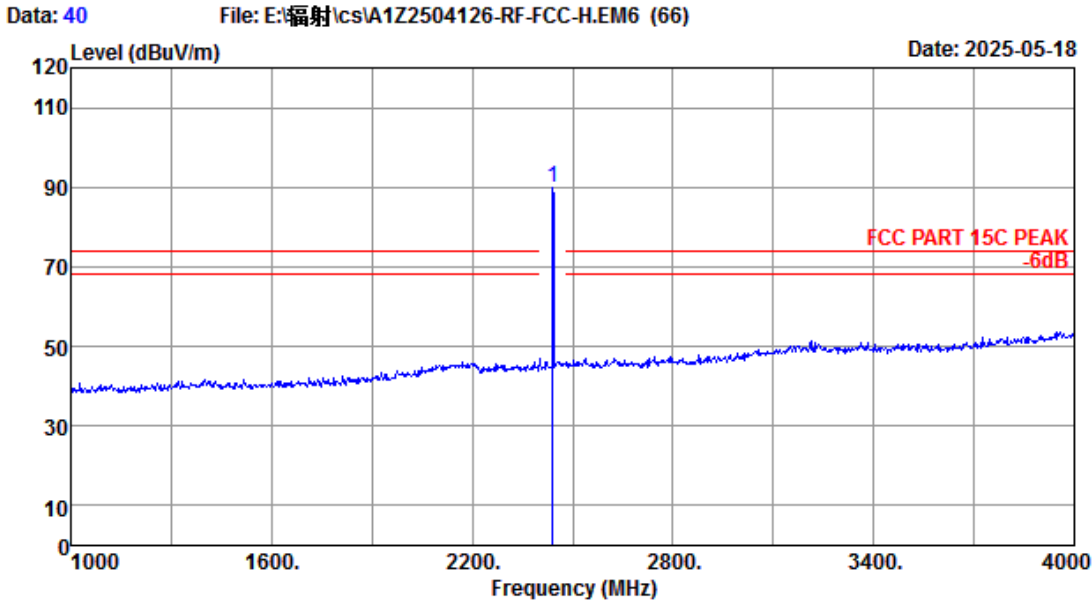


Site no. : RF Chamber Data no. : 40
 Dis. / Ant. : 3m 2024 MCTD1209-3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Engineer : Epoch
 Env. / Ins. : 22.3°C/50%
 Test Mode : 8-DPSK 2441MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2441.000	27.60	4.64	49.60	107.18	89.82	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

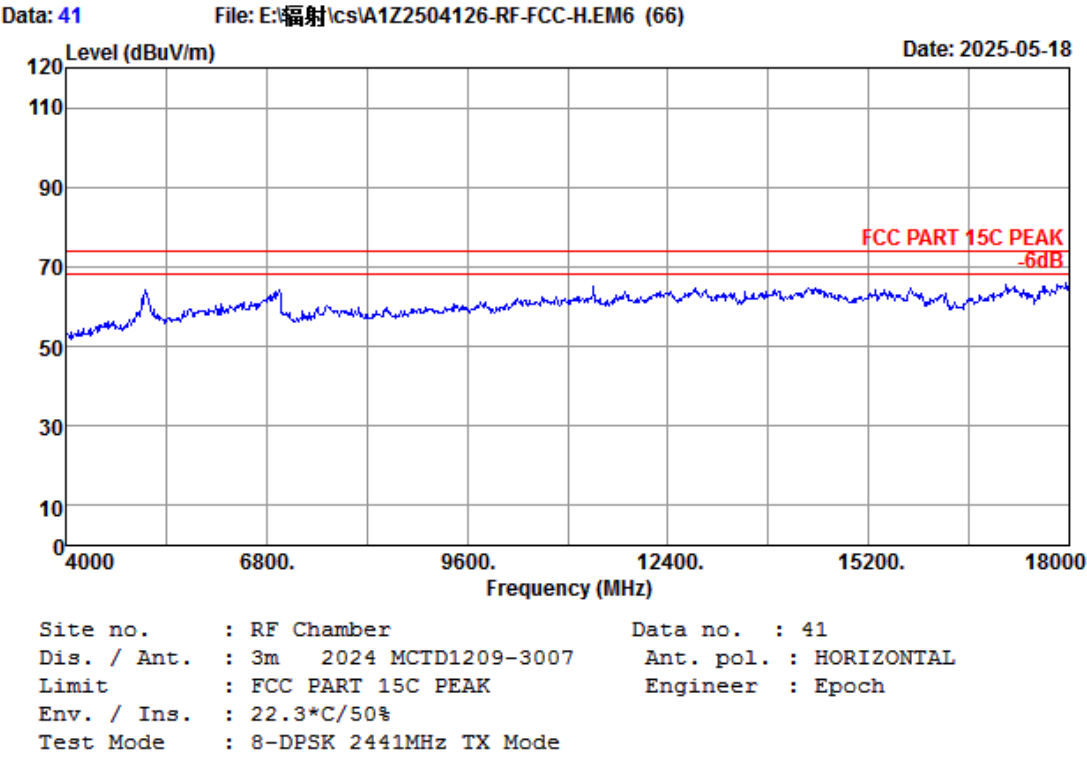


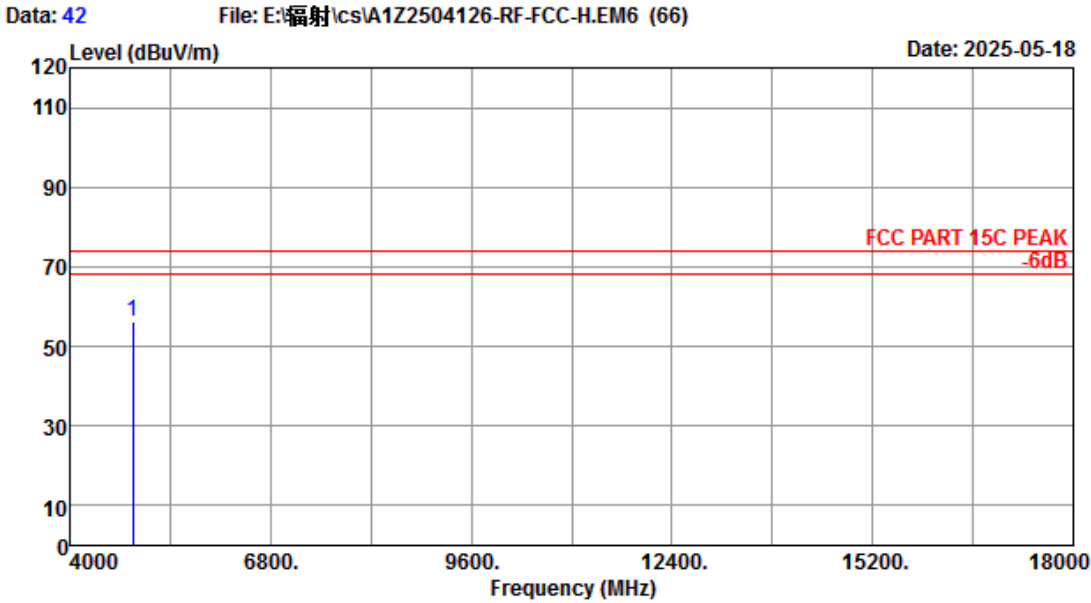

Site no. : RF Chamber Data no. : 42
 Dis. / Ant. : 3m 2024 MCTD1209-3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Engineer : Epoch
 Env. / Ins. : 22.3°C/50%
 Test Mode : 8-DPSK 2441MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4882.000	32.55	6.63	48.19	65.35	56.34	74.00	17.66	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

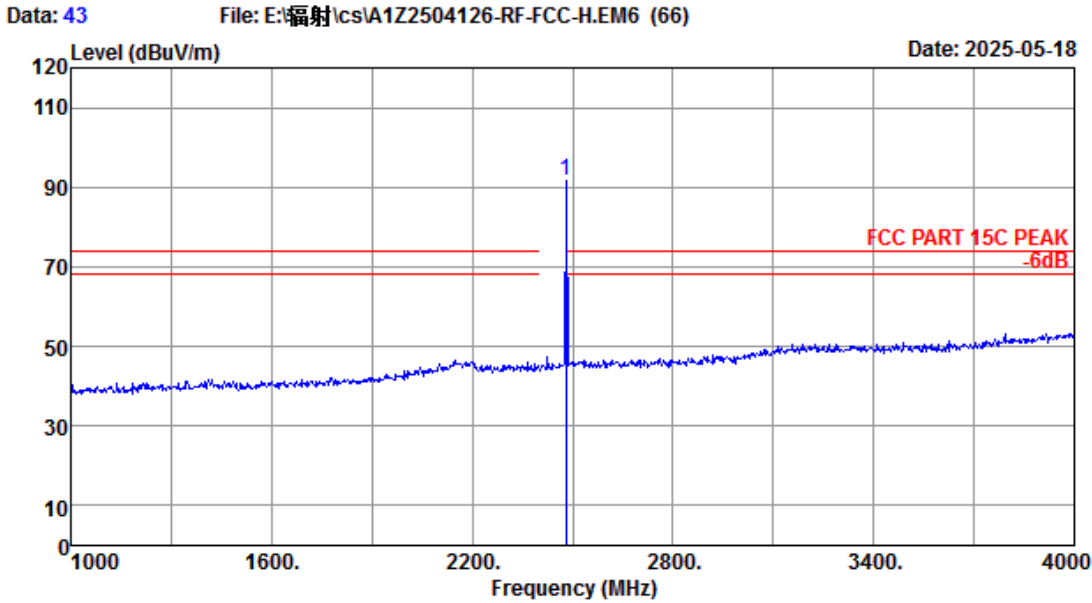



Site no.	: RF Chamber	Data no.	: 43
Dis. / Ant.	: 3m 2024 MCTD1209-3007	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK	Engineer	: Epoch
Env. / Ins.	: 22.3°C/50%		
Test Mode	: 8-DPSK 2480MHz TX Mode		

No.	Freq. (MHz)	Ant.	Cable	AMP	Reading (dBuV)	Emission			Margin	Remark
		Factor (dB/m)	Loss (dB)	factor (dB)		Level (dBuV/m)	Limits (dBuV/m)			
1	2480.000	27.84	4.68	49.57	108.71	91.66	-----	-----	Peak	

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp Factor

2. The emission levels that are 20dB below the official
limit are not reported.

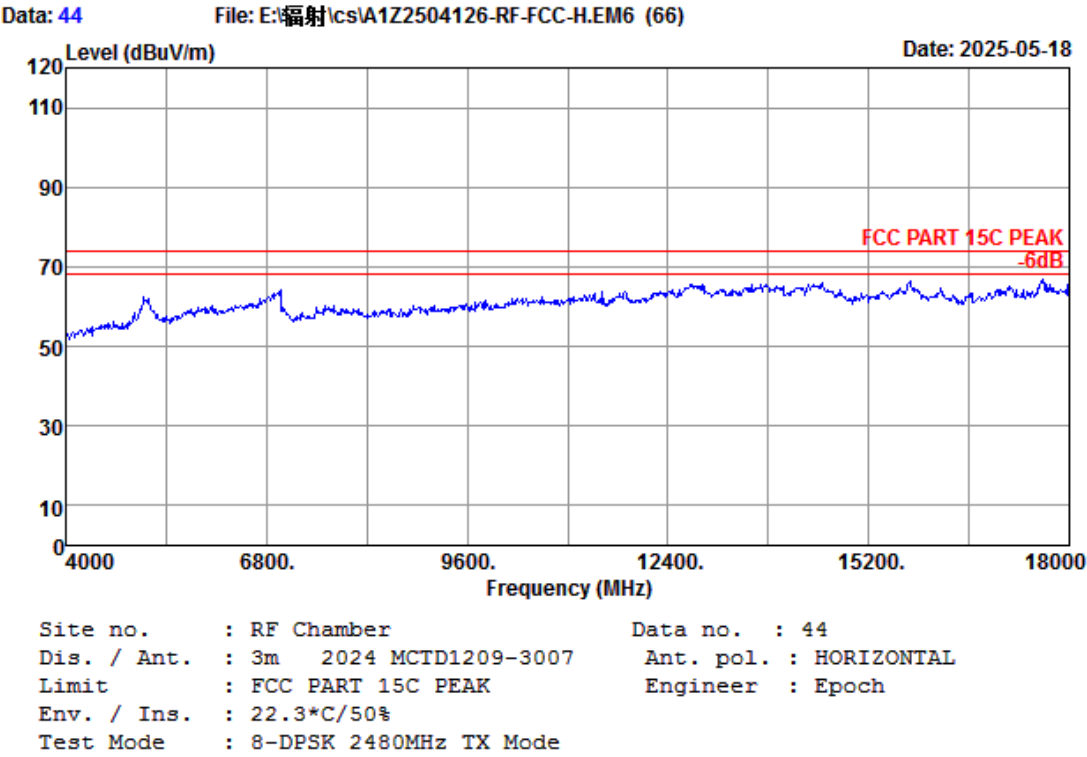


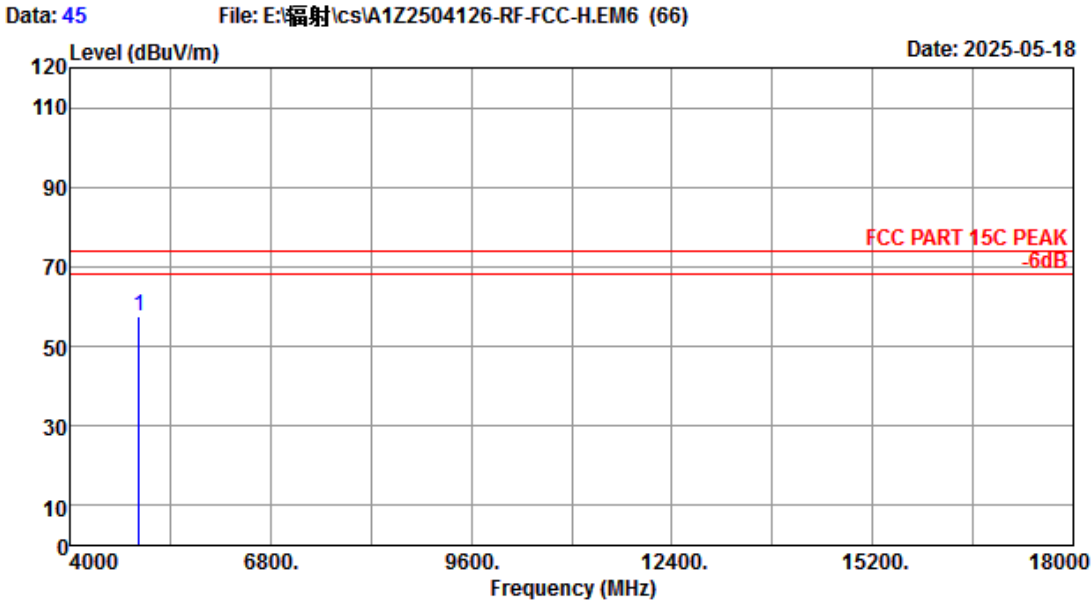

Site no. : RF Chamber Data no. : 45
 Dis. / Ant. : 3m 2024 MCTD1209-3007 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Engineer : Epoch
 Env. / Ins. : 22.3°C/50%
 Test Mode : 8-DPSK 2480MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4960.000	33.60	6.68	48.20	65.69	57.77	74.00	16.23	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

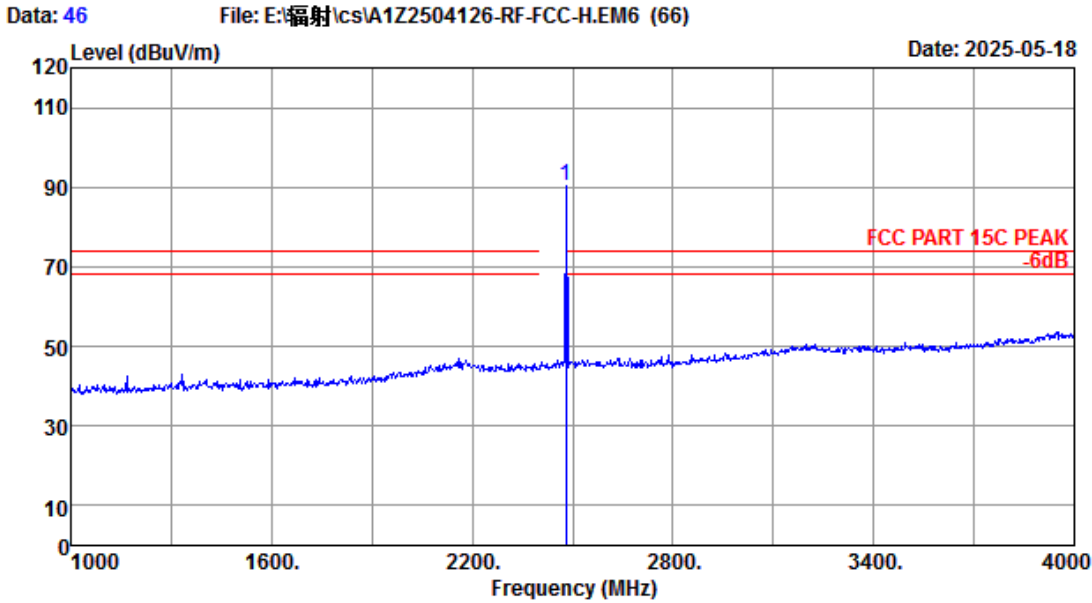


Site no. : RF Chamber Data no. : 46
 Dis. / Ant. : 3m 2024 MCTD1209-3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Engineer : Epoch
 Env. / Ins. : 22.3°C/50%
 Test Mode : 8-DPSK 2480MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.000	27.84	4.68	49.57	107.43	90.38	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

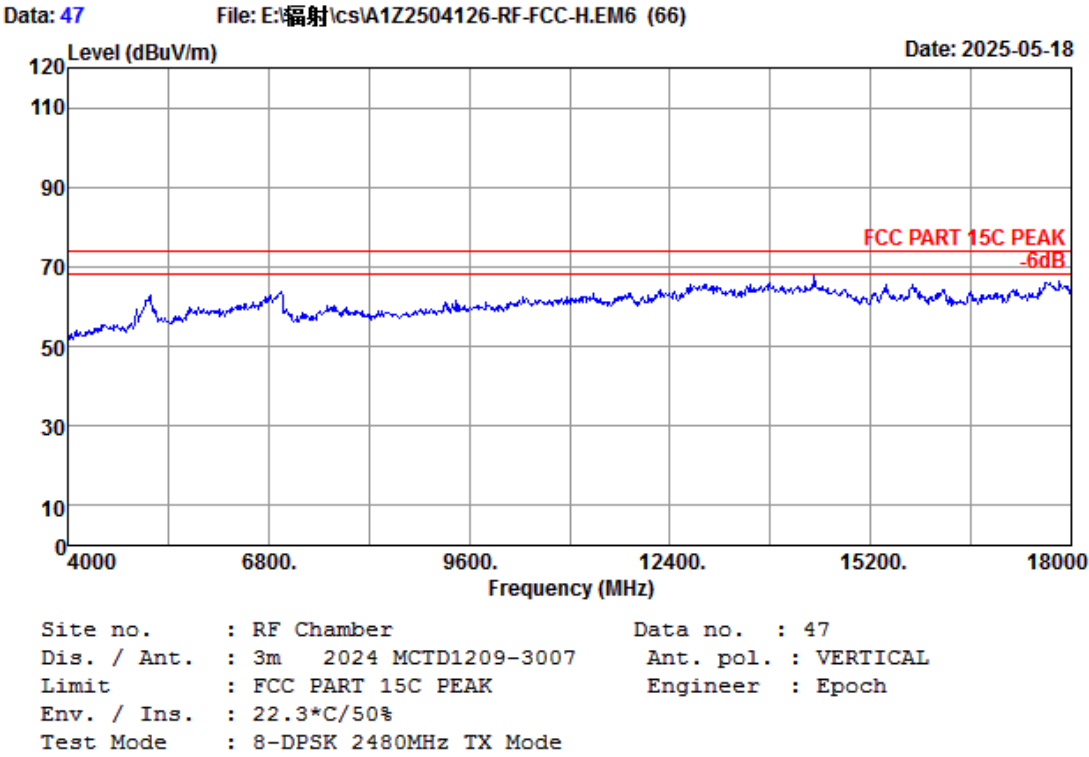

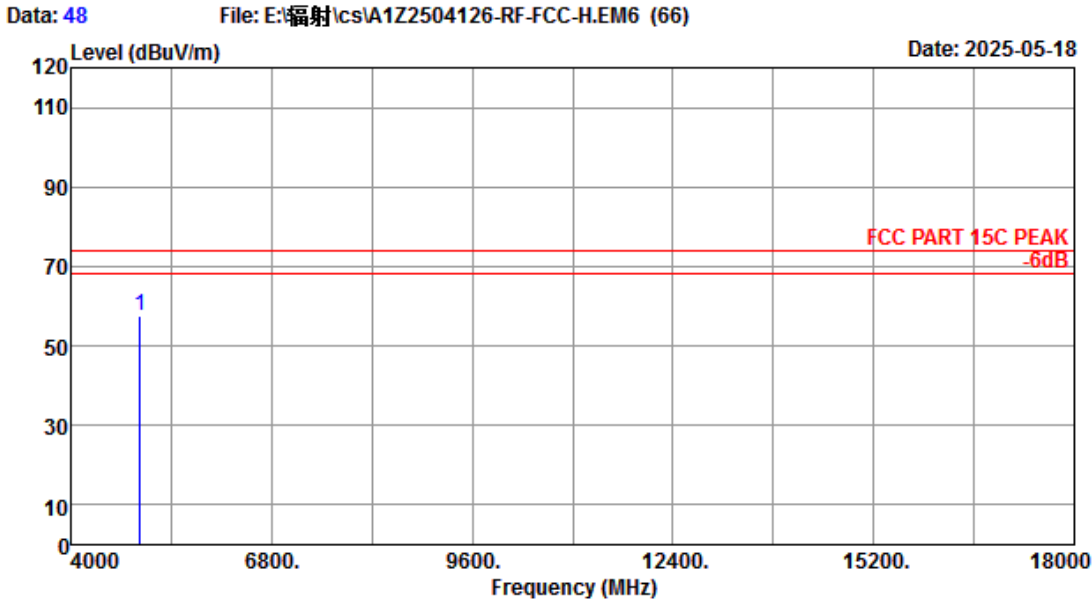

Site no. : RF Chamber Data no. : 48
 Dis. / Ant. : 3m 2024 MCTD1209-3007 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Engineer : Epoch
 Env. / Ins. : 22.3°C/50%
 Test Mode : 8-DPSK 2480MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4960.000	33.60	6.68	48.20	65.27	57.35	74.00	16.65	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

5. CONDUCTED SPURIOUS EMISSIONS

5.1. Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	PXA Signal Analyzer	Agilent	N9030A	MY51380221	Mar.10,25	1 Year
2.	NSA Cable	HUBER+SUHNER	CFD400NL-LW	No.3+190411	Sep.13,24	1 Year
3.	Attenuator(10dB)	eastsheep	2W-SMA-JK-6G -10dB	No. 4	Sep.15,24	1 Year

5.2.Limit

In any 100kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30dB instead of 20dB.

5.3.Test Procedure

Use the test method described in ANSI C63.10 clause 7.8.8:

The transmitter output was connected to a spectrum analyzer, The resolution bandwidth is set to 100 kHz, The video bandwidth is set to 300 kHz and measure all the emissions With peak detector.

Note: The cable loss and attenuator loss were offset into spectrum analyzer as an amplitude offset.

5.4.Test result


PASS (The testing data was attached in the next pages.)

EUT: Pocket TrapMan		
M/N: PT3		
Test date: 2025-05-08~09	Pressure: 102.5±1.0 kpa	Humidity: 53.6±3.0%
Tested by: Epoch	Test site: RF site	Temperature: 22.4±0.6°C


Hopping off

FSK


2402MHz

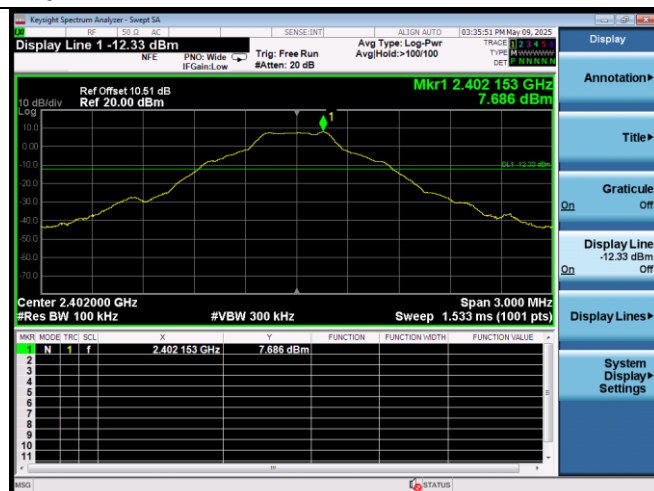


2402MHz(2.3GHz – 2.4GHz)

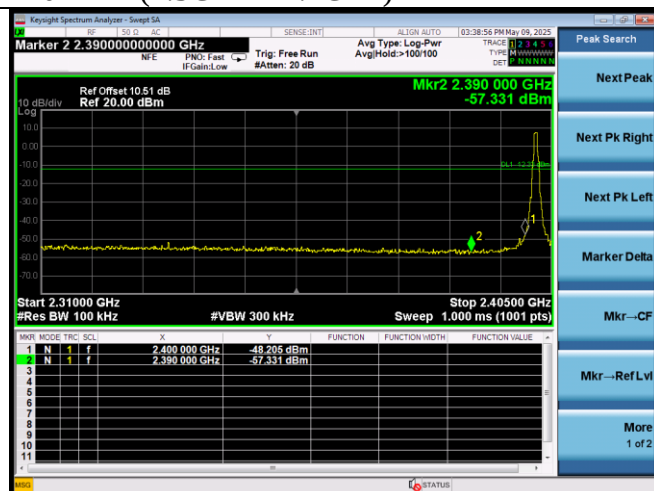


2402MHz(30MHz – 1GHz)

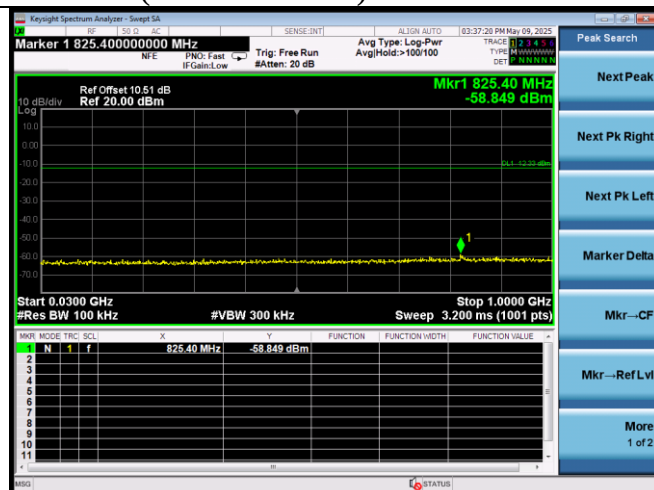


2402MHz(10GHz – 26GHz)

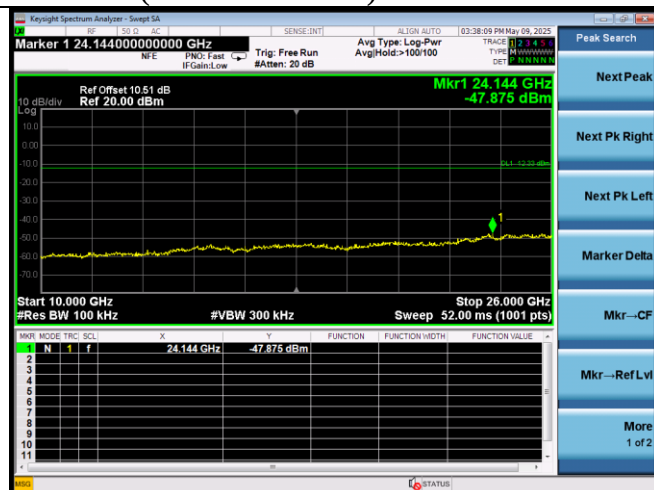


2402MHz(1GHz – 10GHz)

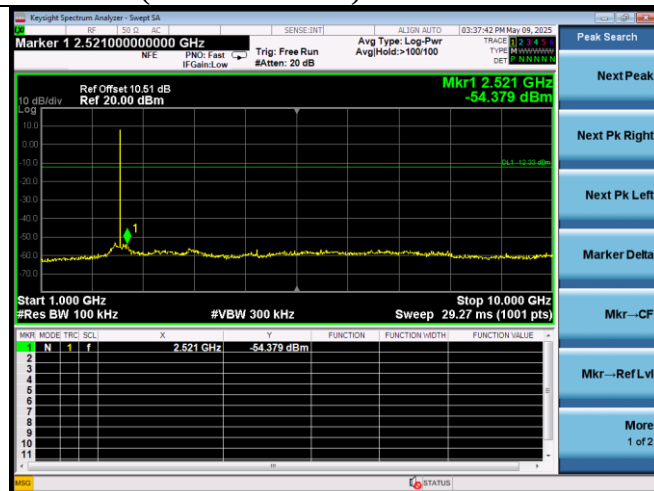


2441MHz

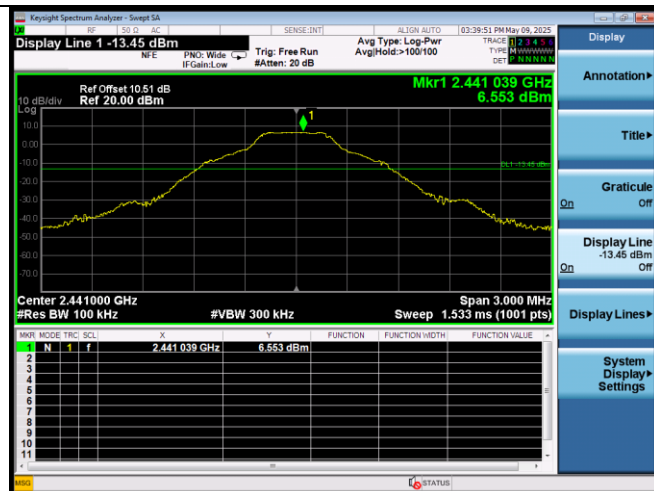


2441MHz(30MHz – 1GHz)

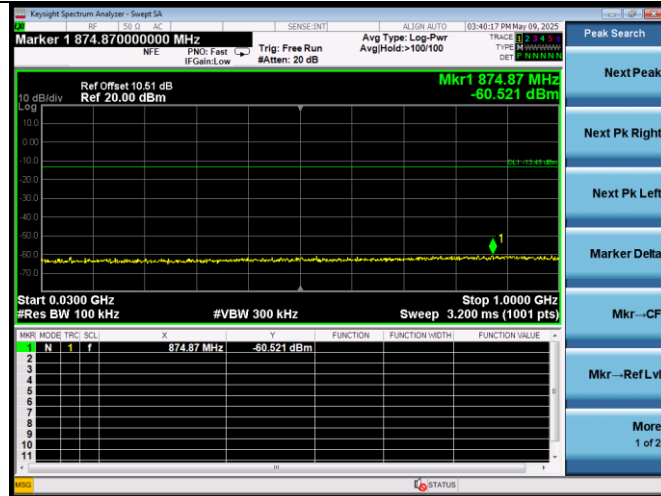


2480MHz

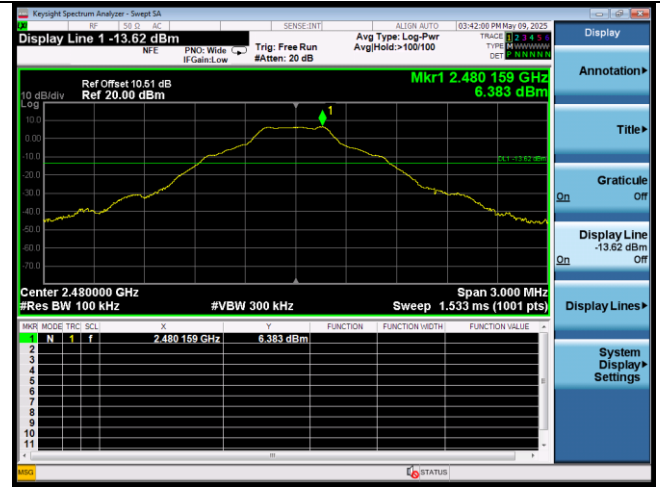


2441MHz(1GHz – 10GHz)

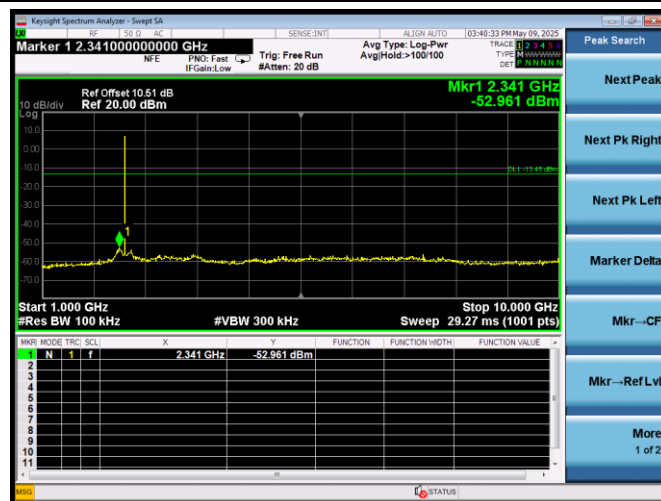


2480MHz(30MHz – 1GHz)

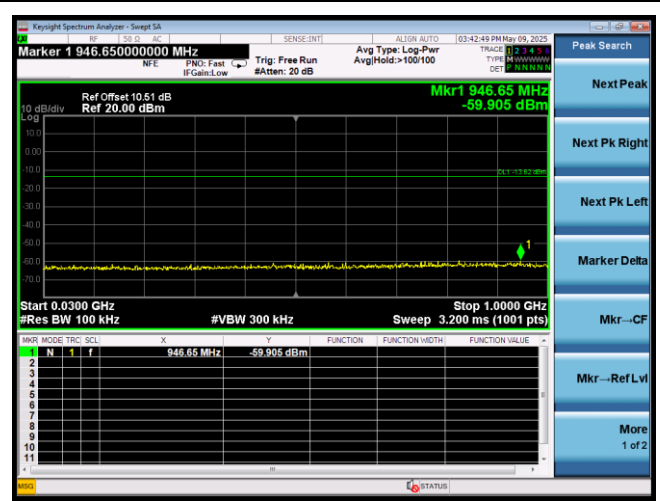


2441MHz(10GHz – 26GHz)

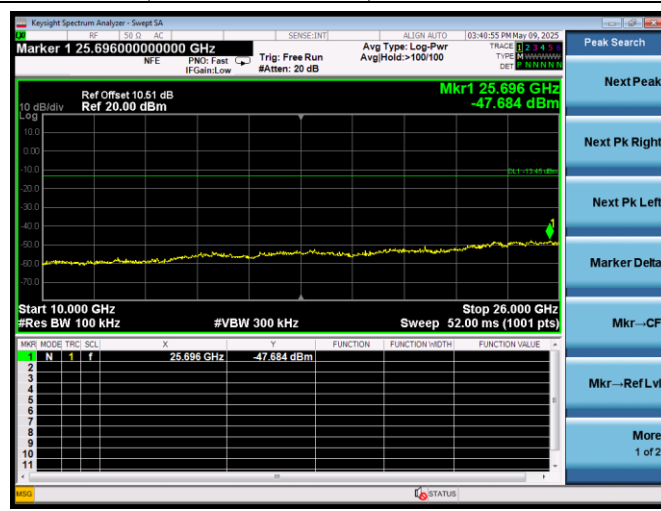


2480MHz(1GHz – 10GHz)

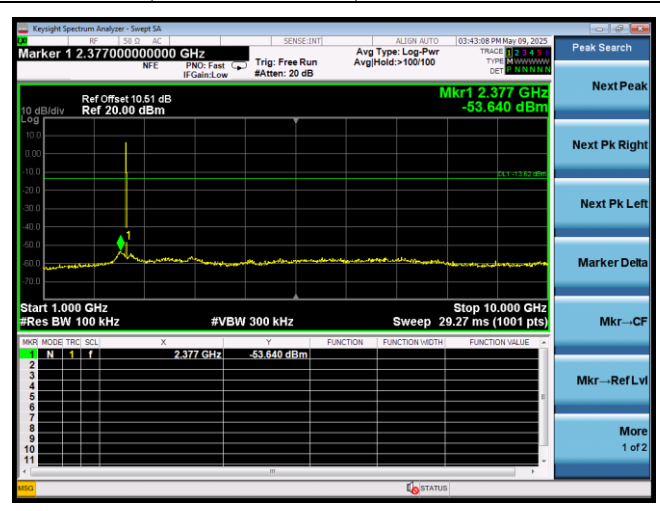


2480MHz(10GHz – 26GHz)

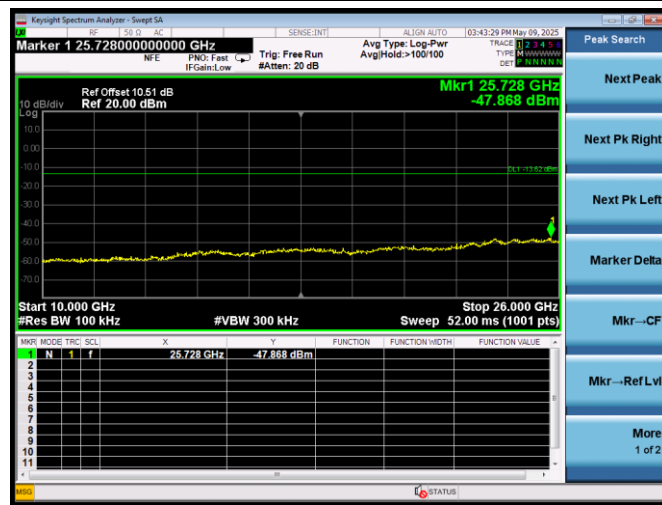


2402MHz(30MHz – 1GHz)

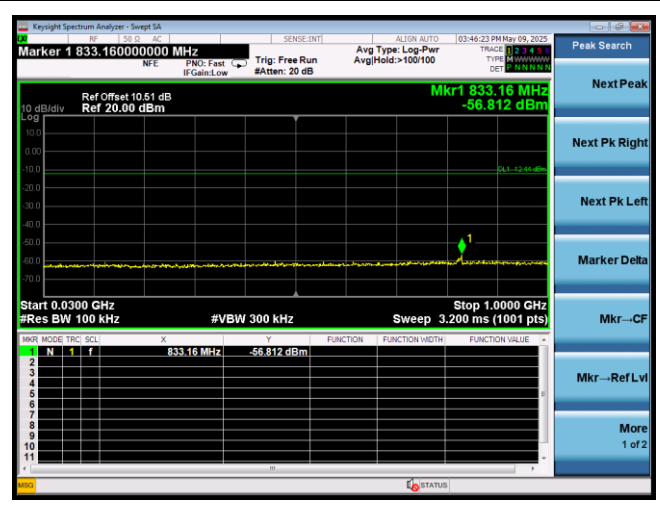

2480MHz(2.4GHz – 2.5GHz)

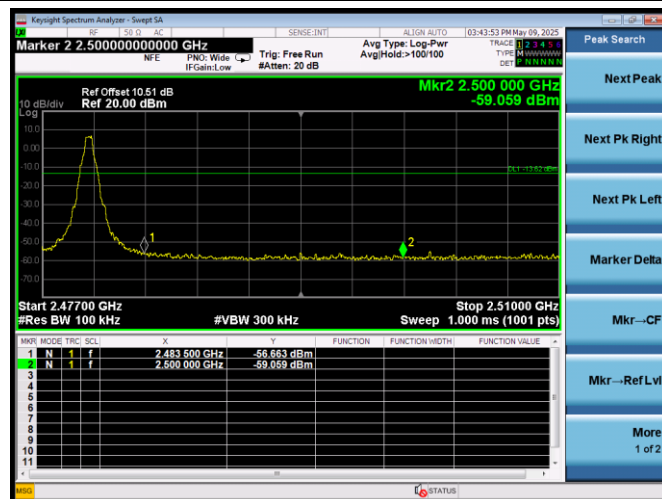


2402MHz(1GHz – 10GHz)

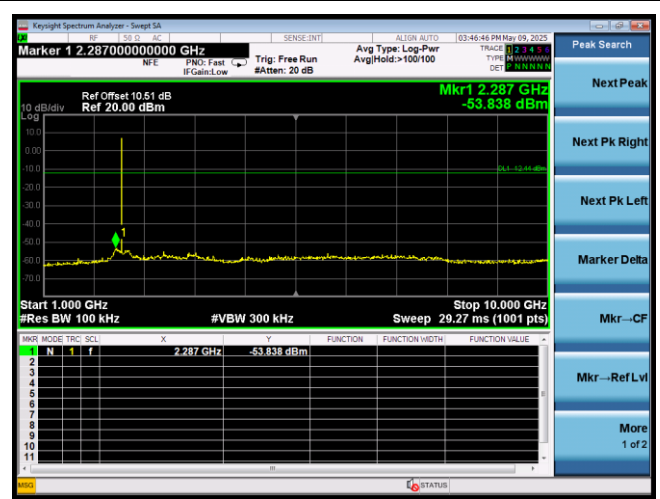


8-DPSK


2402MHz

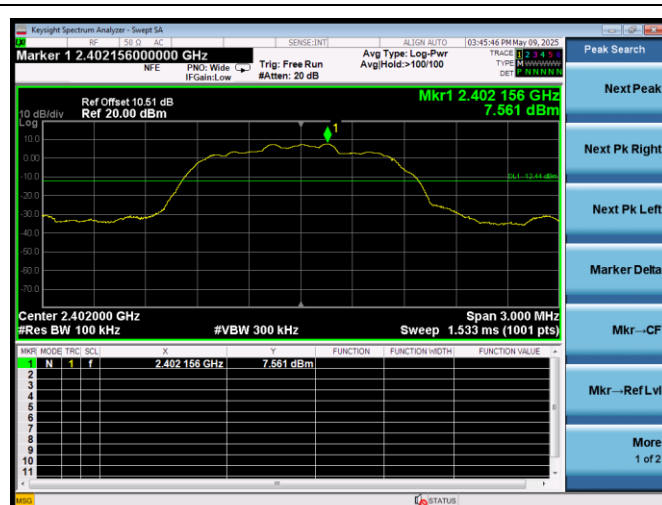


2402MHz(10GHz – 26GHz)

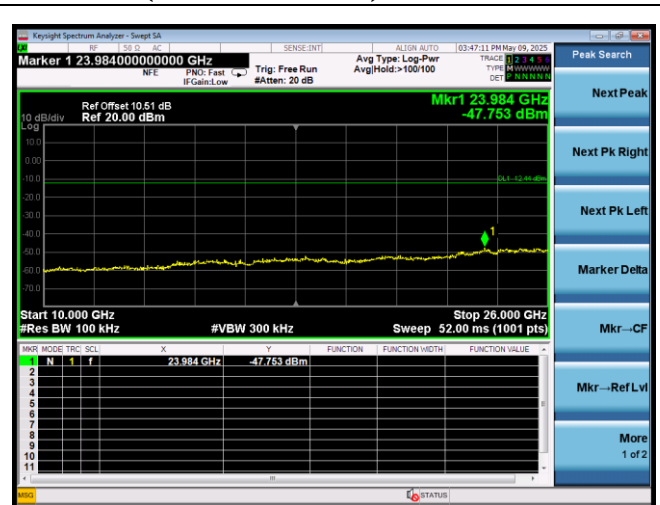


2402MHz(2.3GHz – 2.4GHz)

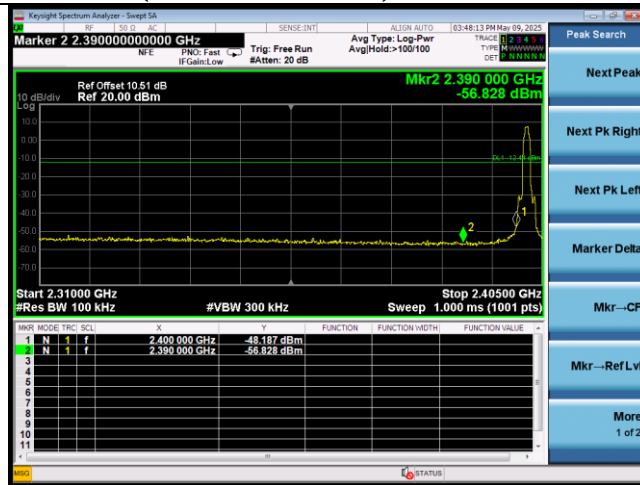


2441MHz(1GHz – 10GHz)

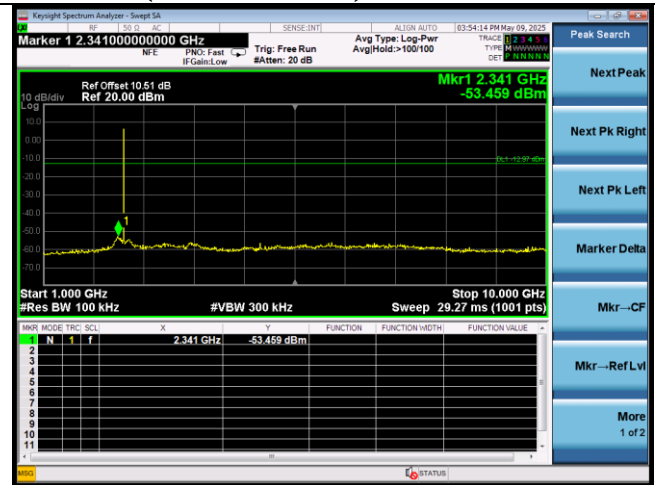


2441MHz

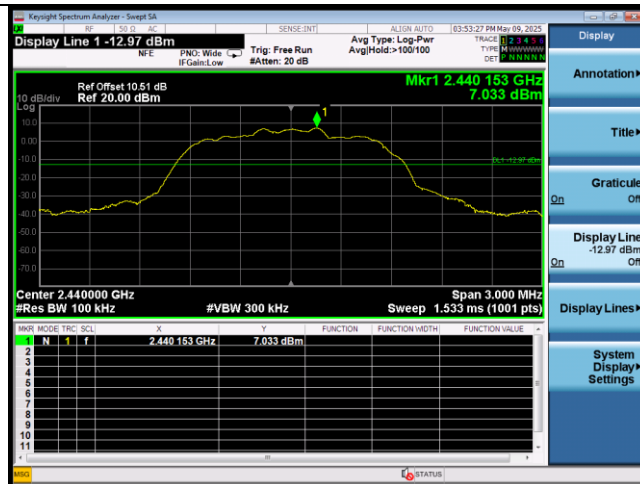


2441MHz(10GHz – 26GHz)

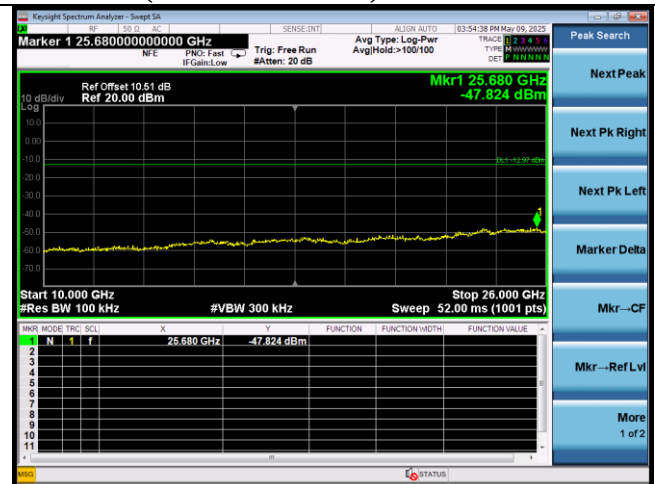


2441MHz (30MHz – 1GHz)

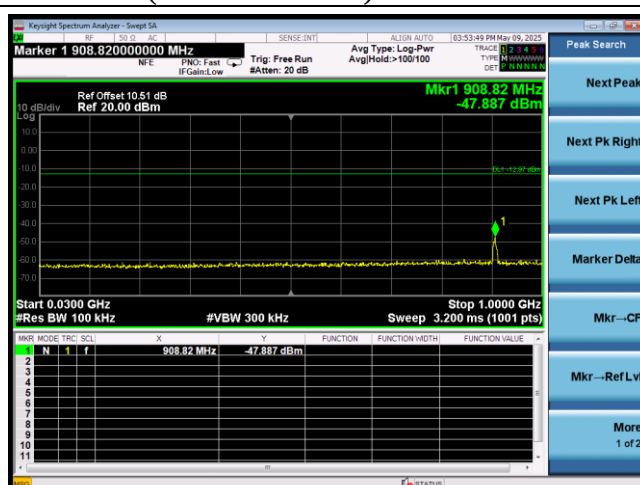


2480MHz

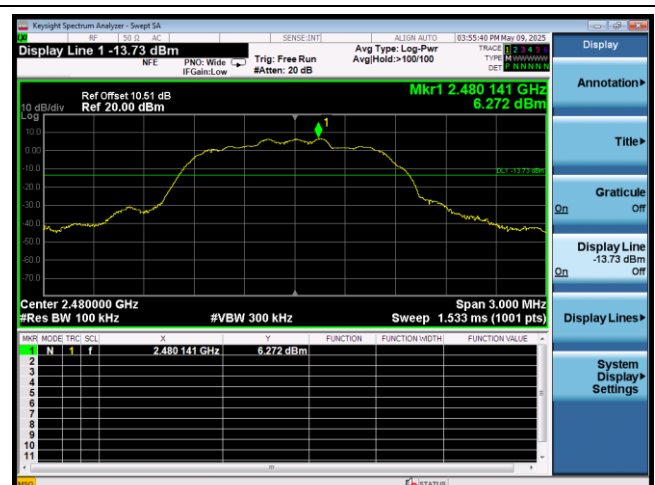


2480MHz(30MHz – 1GHz)

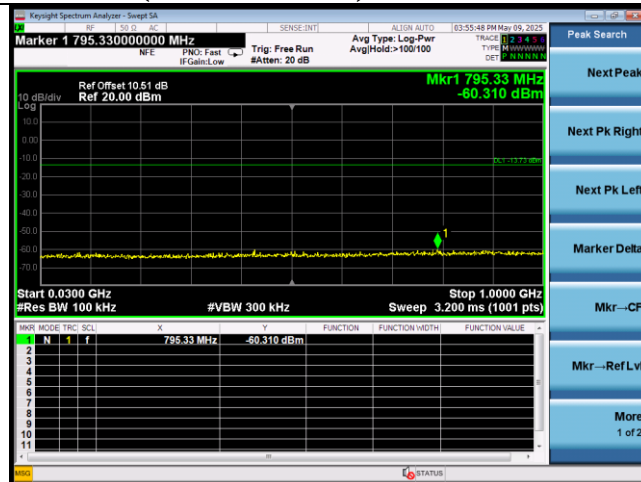

2480MHz(2.4GHz – 2.5GHz)

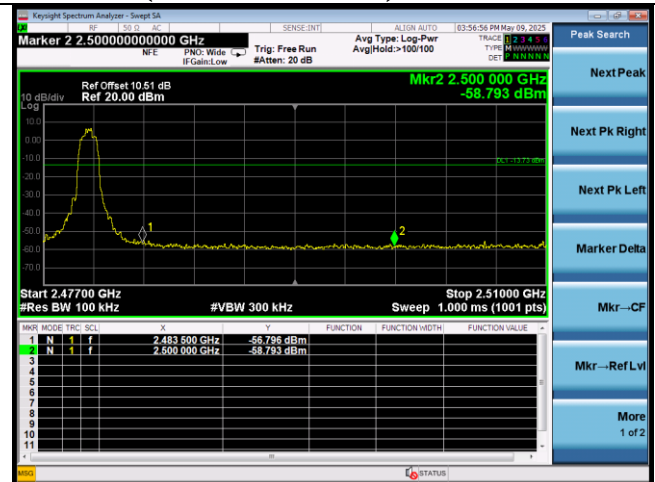


2480MHz(1GHz – 10GHz)

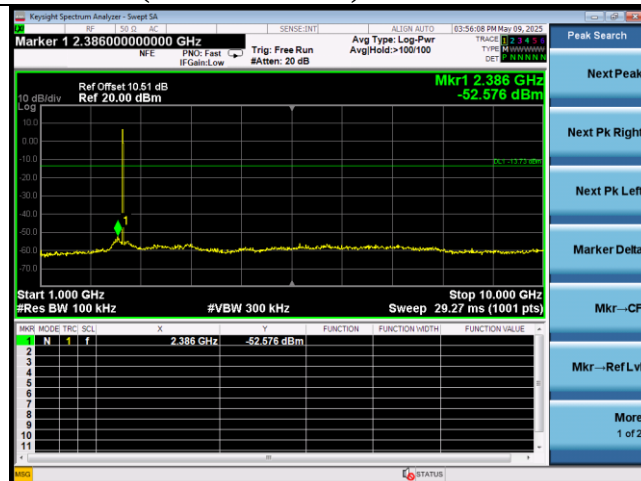

Hopping on


GFSK(2.3GHz – 2.4GHz)

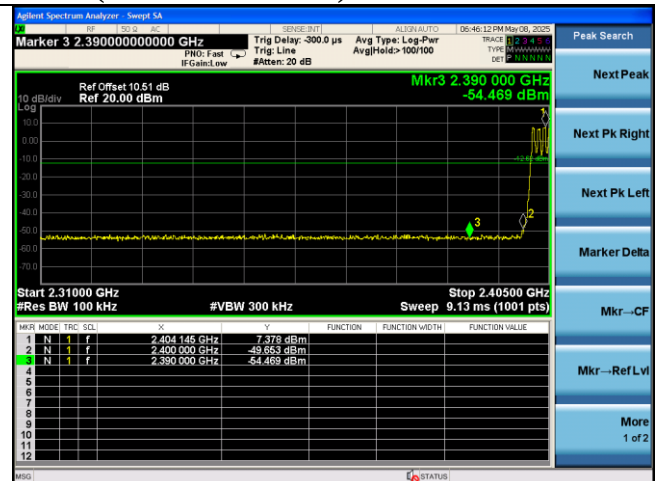


2480MHz(10GHz – 26GHz)




GFSK(2.4GHz – 2.5GHz)

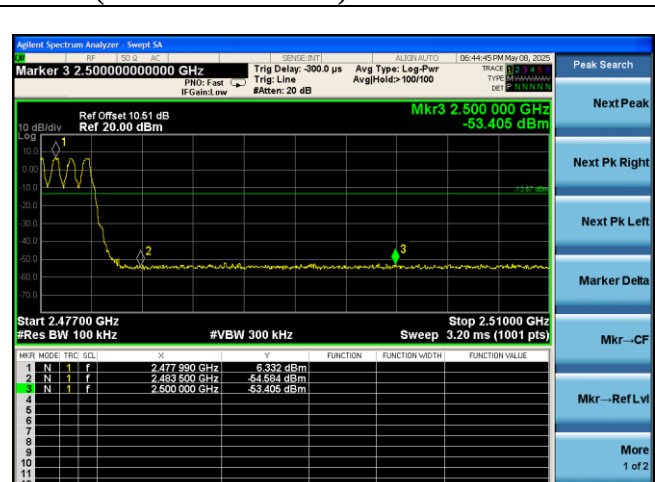

8-DPSK(2.3GHz – 2.4GHz)

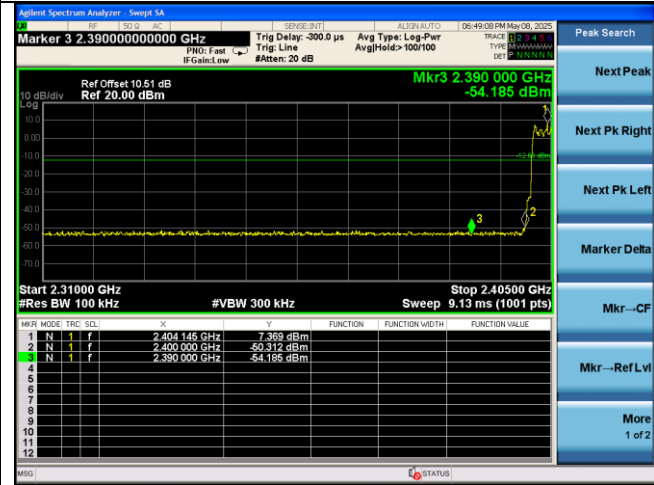

8-DPSK(2.4GHz – 2.5GHz)

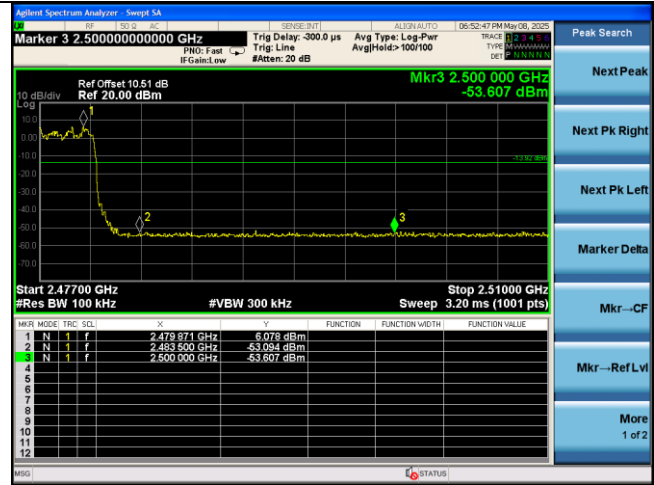

6. 20 DB & 99% BANDWIDTH TEST

6.1.Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	PXA Signal Analyzer	Agilent	N9030A	MY51380221	Mar.10,25	1 Year
2.	NSA Cable	HUBER+SUHNER	CFD400NL-L W	No.3+190411	Sep.13,24	1 Year
3.	Attenuator(10dB)	eastsheep	2W-SMA-JK- 6G-10dB	No. 4	Sep.15,24	1 Year

6.2.Limit

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

6.3.Test Procedure

Use the test method described in ANSI C63.10 clause 7.8.7:


1. Connect the antenna port of the EUT to the spectrum analyzer.
2. Let the EUT transmit at Low/ Mid/ High channel with test software.
3. Setting of SA is following as: RBW: 30kHz / VBW: 100kHz
Sweep Mode: Continuous sweep
Detect mode: Positive peak
Trace mode: Max hold.
4. Use the occupied bandwidth function of the SA measure the 20dB bandwidth directly.

6.4. Test Results

EUT: Pocket TrapMan				
M/N: PT3				
Test date: 2025-05-08		Pressure: 102.5±1.0 kpa		Humidity: 53.6±3.0%
Tested by: Epoch		Test site: RF site		Temperature: 22.4±0.6°C
Test Mode	CH	99%Bandwidth (KHz)	-20dBBandwidth (KHz)	Limit (KHz)
GFSK	CH0	895.37	1025	N/A
	CH39	896.26	1026	
	CH78	896.18	1019	
8-DPSK	CH0	1170.6	1301	N/A
	CH39	1169.1	1302	
	CH78	1167.9	1299	
Conclusion: Pass				


GFSK

2402MHz

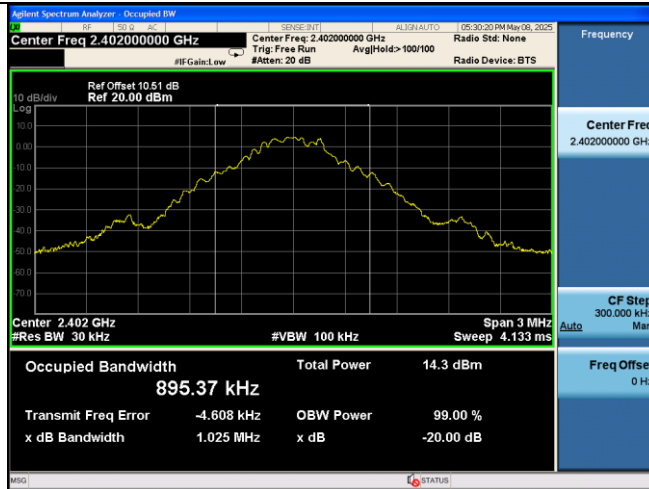


8-DPSK


2402MHz

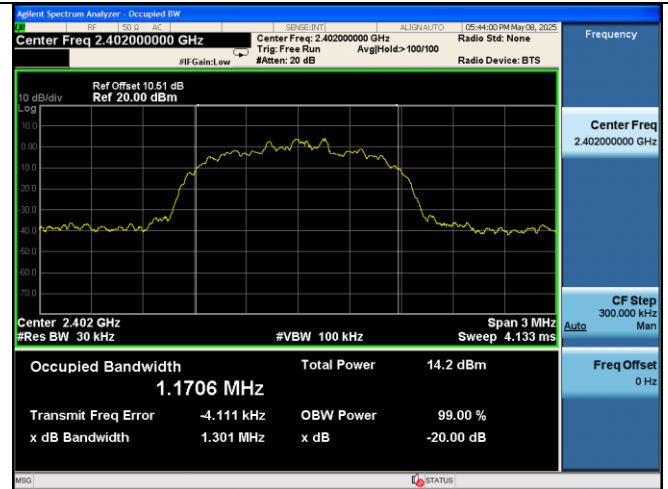


2441MHz

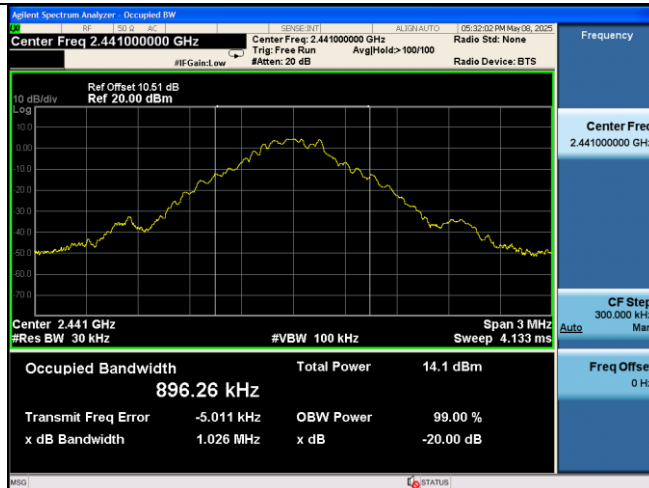


2441MHz

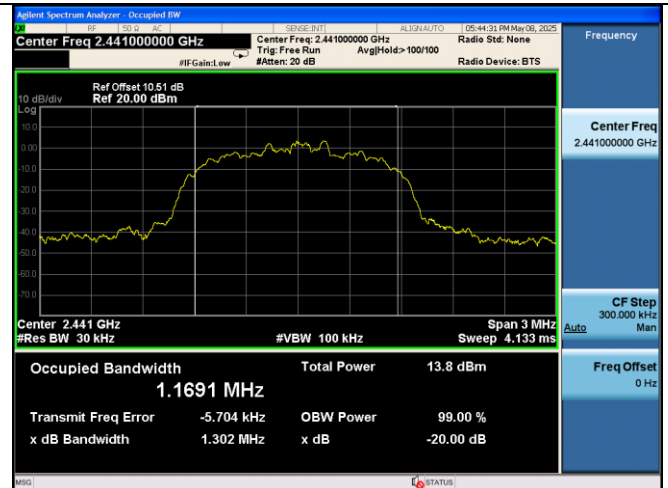

2480MHz

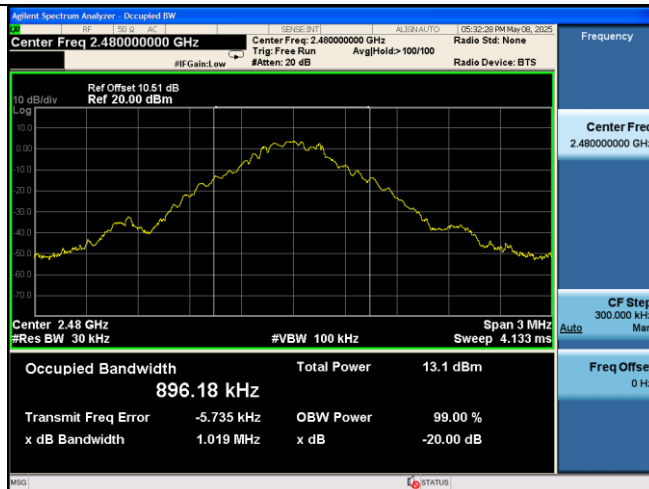

2480MHz

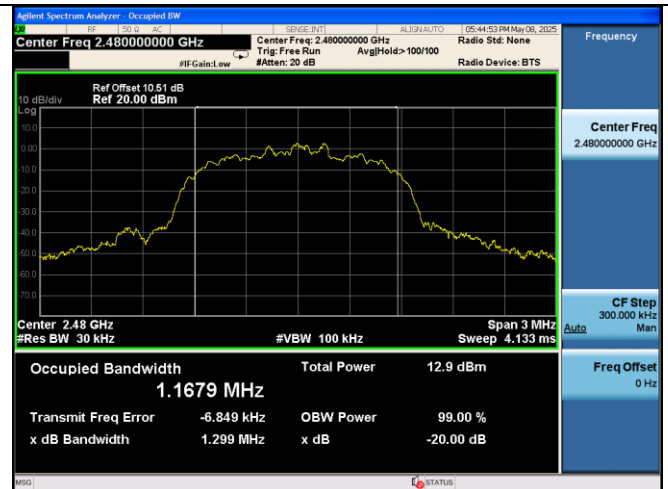

7. CARRIER FREQUENCY SEPARATION TEST

7.1. Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	PXA Signal Analyzer	Agilent	N9030A	MY51380221	Mar.10,25	1 Year
2.	NSA Cable	HUBER+SUHNER	CFD400NL-LW	No.3+190411	Sep.13,24	1 Year
3.	Attenuator(10dB)	eastsheep	2W-SMA-JK-6G-10dB	No. 4	Sep.15,24	1 Year

7.2. Limit

Frequency hopping systems shall have hopping channel carrier frequency separated by a minimum of 25kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.


7.3. Test Procedure

Use the test method described in ANSI C63.10 clause 7.8.2:

1. Connect the antenna port of the EUT to the Spectrum analyzer.
2. Let the EUT transmit at Low/ Mid/ High channel.
3. Setting of SA is following as: RBW: 100kHz / VBW: 300kHz.Span: 5MHz
4. Use the mark Delta function of the SA measure out the channel separation.

7.4.Test Results.

EUT: Pocket TrapMan			
M/N: PT3			
Test date: 2025-05-08		Pressure: 102.5±1.0 kpa	Humidity: 53.6±3.0%
Tested by: Epoch		Test site: RF site	Temperature: 22.4±0.6°C
Test Mode	Channel separation	Limit(KHz)	Conclusion
GFSK	1	465.4	PASS
8-DPSK	1	775.3	PASS

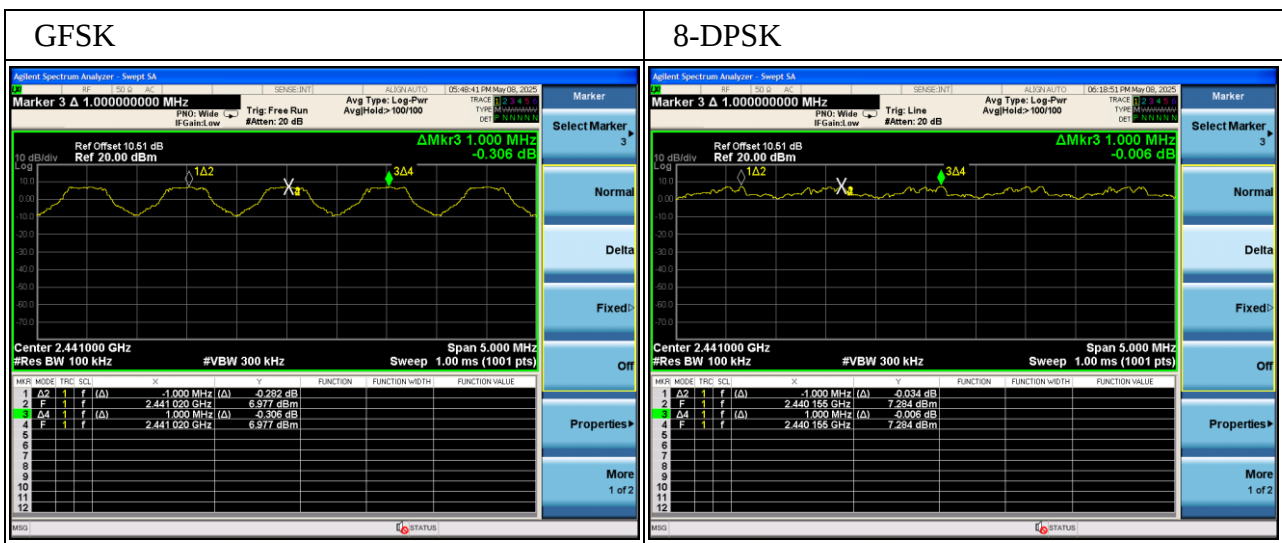

8. NUMBER OF HOPPING FREQUENCY TEST

8.1. Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	PXA Signal Analyzer	Agilent	N9030A	MY51380221	Mar.10,25	1 Year
2.	NSA Cable	HUBER+SUHNER	CFD400NL-LW	No.3+190411	Sep.13,24	1 Year
3.	Attenuator(10dB)	eastsheep	2W-SMA-JK-6G-10dB	No. 4	Sep.15,24	1 Year

8.2. Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels

8.3. Test Procedure

Use the test method descried in ANSI C63.10 clause 7.8.3:


1. Connect the antenna of the EUT to Spectrum analyzer and let the EUT working at hopping mode.
2. Setting of SA is following as: RBW: 100kHz / VBW: 300kHz,
Start frequency: 2390MHz
Stop frequency: 2483.5MHz

And waiting for the hopping trace until stability, count out the number of the hopping.

8.4.Test Results

EUT: Pocket TrapMan		
M/N: PT3		
Test date: 2025-05-08	Pressure: 102.5±1.0 kpa	Humidity: 53.6±3.0%
Tested by: Epoch	Test site: RF site	Temperature: 22.4±0.6°C

Test Mode	Number of channel	Limit	Conclusion
GFSK	79	≥15	PASS
8-DPSK	79	≥15	PASS

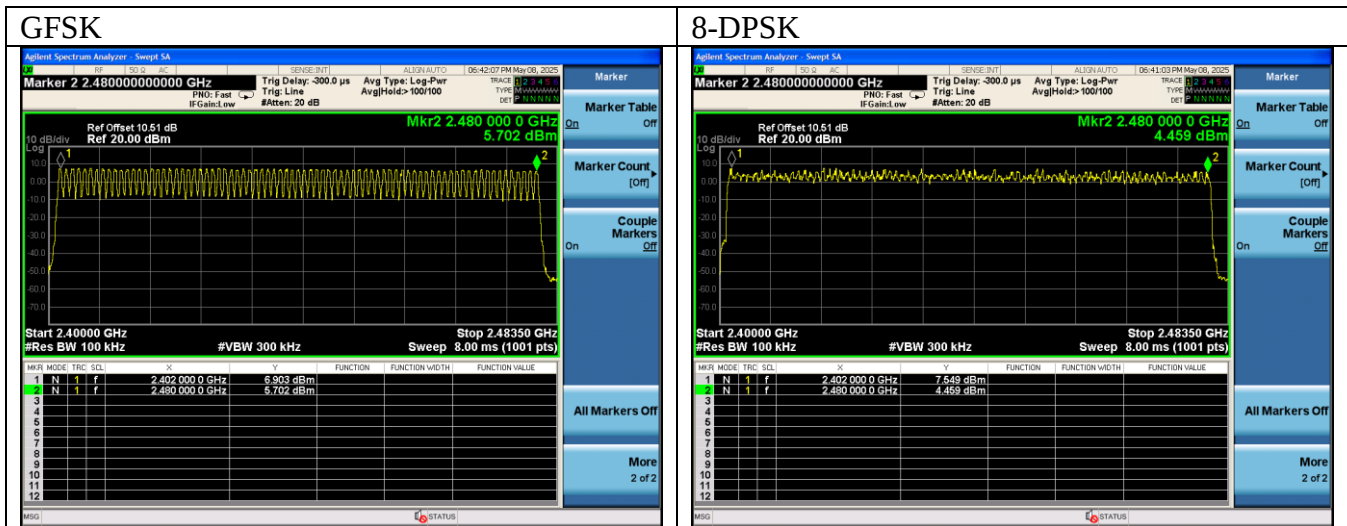

9. DWELL TIME

9.1. Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	PXA Signal Analyzer	Agilent	N9030A	MY51380221	Mar.10,25	1 Year
2.	NSA Cable	HUBER+SUHNER	CFD400NL-LW	No.3+190411	Sep.13,24	1 Year
3.	Attenuator(10dB)	eastsheep	2W-SMA-JK-6G-10dB	No. 4	Sep.15,24	1 Year

9.2. Limit

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

9.3. Test Procedure

Use the test method described in ANSI C63.10 clause 7.8.4:

1. Connect the antenna of the EUT to Spectrum analyzer and let the EUT working at hopping mode.
2. Setting of SA is following as:
RBW: 100kHz / VBW: 300kHz
Sweep Mode: Single
Detect mode: Positive peak
Trace mode: Auto
Span: 0Hz
Sweep time: 5s and big enough to measure one hopping signal
3. Use below formula calculate the Dwell time
$$\text{Dwell time} = \text{Hopping number per second} \times 0.4 \times \text{channel number} \times \text{Pulse bandwidth per hopping}.$$