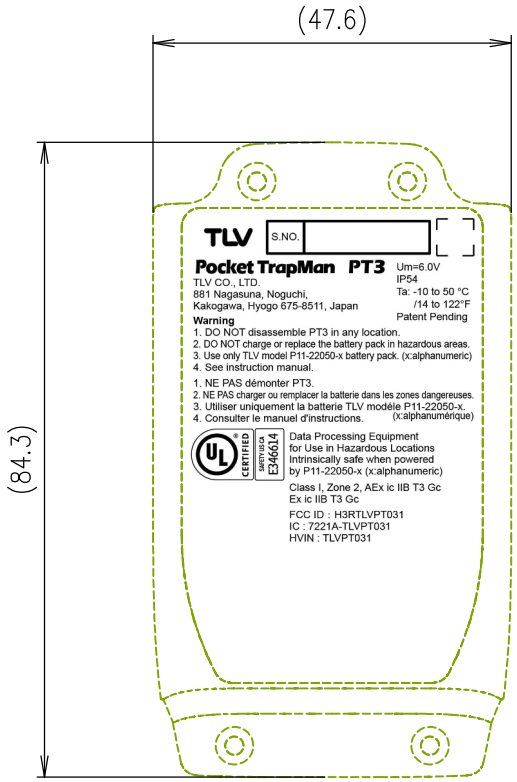

Note

1. The content of the S No.frame is xxyyyyy.
   ("xx" indicates the date of manufacture)
2. Laser marking on battery cover.
3. Each indication item may change the location.

RoHS Compliant

No	変更内容	設変No	日付	担当 / 確認
5				
4	Updated marking.	—	2025-05-29	S.Ito / A.Oizumi
3	Fixed text location.	—	2024-12-26	S.Ito / A.Oizumi
2	Added marking required by FCC/ISED.	—	2024-10-18	S.Ito / A.Oizumi
1	Added marking required by UL/cUL.	—	2024-10-08	S.Ito / A.Oizumi
0	新規作成	—	2024-03-25	——

本図において，指示なき許容寸法は，部品検査基準書によること。

削り加工部一般公差 寸法範囲	公差	仕上面のアラサ 仕上記号	表面アラサ
6 以下	±0.1		
6 ~ 30 〃	±0.2	▽▽▽▽ Ra 0.2	0.8 S 以下
30 ~ 120 〃	±0.3	▽▽▽ Ra 1.6	6.3 S 〃
120 ~ 400 〃	±0.5	▽▽ Ra 6.3	25 S 〃
400 ~1000 〃	±0.8	▽ Ra 25	100 S 〃

主査	A.Oizumi	呼径 mm	—	Laser marking-UL (Battery cover)	1
設計	S.Ito	最高使用圧力 MPaG	—	品名	員数 / 材質
製図	S.Ito	最高使用温度 °C	—		
検図	Y.Ito	尺度 A4	1:1	図面番号	E570-90(04)
型式	PT3				
製品名	TLV Pocket TrapMan			株式会社 テイエルブイ	