



FCC RADIO TEST REPORT

FCC ID : H4ISM2182
Equipment : Wireless Mouse
Brand Name : hp
Model Name : TPA-L005M
Applicant : LITE-ON Technology Corp.
16F,392, Ruey Kuang Road, Neihu, Taipei 11492, Taiwan.
Manufacturer : LITE-ON Technology Corp.
16F,392, Ruey Kuang Road, Neihu, Taipei 11492, Taiwan.
Standard : FCC Part 15 Subpart C §15.247

The product was received on Jul. 29, 2025 and testing was performed from Aug. 05, 2025 to Aug. 19, 2025. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

Approved by: Louis Wu

Sportun International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description.....	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	5
1.3 Testing Location	6
1.4 Applicable Standards.....	6
2 Test Configuration of Equipment Under Test.....	7
2.1 Carrier Frequency Channel	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System	9
2.4 Support Unit used in test configuration and system	9
2.5 EUT Operation Test Setup	10
2.6 Measurement Results Explanation Example.....	10
3 Test Result.....	11
3.1 6dB and 99% Bandwidth Measurement	11
3.2 Output Power Measurement.....	12
3.3 Power Spectral Density Measurement	13
3.4 Conducted Band Edges and Spurious Emission Measurement	14
3.5 Radiated Band Edges and Spurious Emission Measurement	15
3.6 AC Conducted Emission Measurement.....	19
3.7 Antenna Requirements.....	21
4 List of Measuring Equipment	22
5 Measurement Uncertainty	24
Appendix A. Conducted Test Results	
Appendix B. AC Conducted Emission Test Result	
Appendix C. Radiated Spurious Emission Test Result	
Appendix D. Duty Cycle Plots	
Appendix E. Setup Photographs	



History of this test report



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(a)(2)	6dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Pass	-
3.2	15.247(b)(3) 15.247(b)(4)	Output Power	Pass	-
3.3	15.247(e)	Power Spectral Density	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	Pass	-
3.6	15.207	AC Conducted Emission	Pass	-
3.7	15.203	Antenna Requirement	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Keven Cheng**Report Producer: Freda Wu**



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
General Specs Bluetooth-LE and 2.4G SRD.	
Antenna Type Bluetooth: Chip Antenna	
Antenna information	
2400 MHz ~ 2483.5 MHz	Peak Gain (dBi) 1.85

Remark: The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

1.2 Modification of EUT

No modifications made to the EUT during the testing.



1.3 Testing Location

Test Site	Sportun International Inc. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sportun Site No. CO05-HY (TAF Code: 1190)
Remark	The AC Conducted Emission test item subcontracted to Sporton International Inc. EMC & Wireless Communications Laboratory.

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	Sportun International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sportun Site No. TH05-HY, 03CH20-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW1190 and TW3786

1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC KDB Publication No. 558074 D01 15.247 Meas Guidance v05r02
- FCC KDB 414788 D01 Radiated Test Site v01r01
- FCC Part 15 Subpart C §15.247
- ANSI C63.10-2020

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
	20	2442	-	-




2.2 Test Mode

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and only the worst case emissions were reported in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	Data Rate / Modulation
Conducted Test Cases	Bluetooth – LE / GFSK
	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps
	Mode 2: Bluetooth Tx CH20_2442 MHz_1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
AC Conducted Emission	Mode 1 :BLE 1 Idle + SRD Link + USB Cable + Notebook + BLE 2 Idle Mode 2 :BLE 1 Link + SRD on + USB Cable + Notebook + BLE 2 Idle Mode 3 :BLE 1 Idle + SRD on + USB Cable + Notebook + BLE 2 Link
Remark:	
1. The worst case of Conducted Emission is mode 3; only the test data of it was reported. 2. For radiation spurious emission, the modulation and the data rate picked for testing are determined by the Max. RF conducted power. 3. The detailed Radiated test modes are shown in Appendix C.	

2.3 Connection Diagram of Test System

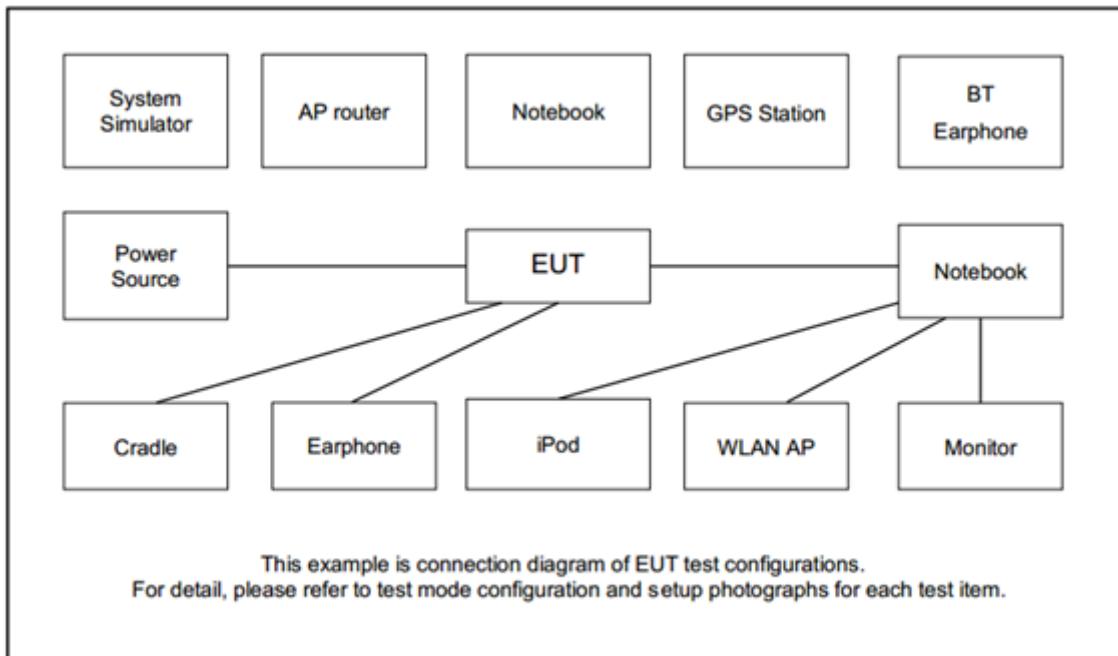

2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded, 1.8 m
2.	Notebook	DELL	Latitude 3420	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
3.	iPod	Apple	A1285	FCC DoC	Shielded, 1.0 m	N/A



2.5 EUT Operation Test Setup

The RF test items, utility "SM2182 Mouse RF test procedure" was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

Offset(dB) = RF cable loss(dB) + attenuator factor(dB).

$$= 4.2 + 10 = 14.2 \text{ (dB)}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 1% to 5% of the OBW but not less than 100 kHz. Set the Video bandwidth VBW $\geq 3 * \text{RBW}$. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz.
For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth, and set the Video bandwidth (VBW) $\geq 3 * \text{RBW}$.
5. Measure and record the results in the test report.

3.1.4 Test Setup

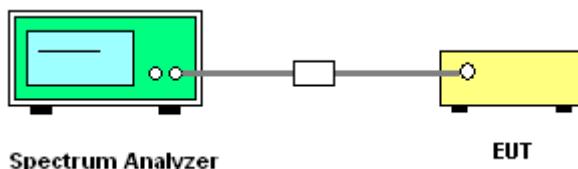

3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

3.1.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5 MHz, the limit for output power is 30 dBm. If transmitting antenna of directional gain greater than 6 dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.


3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.2.3 Test Procedures

1. For Average Power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G
2. The RF output of EUT is connected to the power meter by RF cable and attenuator.
3. The path loss is compensated to the results for each measurement.
4. Set the maximum power setting and enable the EUT to transmit continuously.
5. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

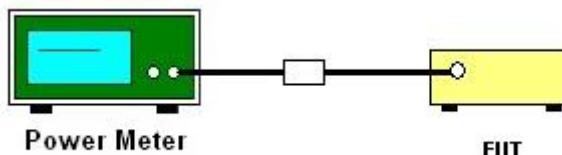

3.2.5 Test Result of Average Output Power

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8 dBm in any 3 kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.3.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth (VBW) = 10 kHz. In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6 dB BW)
5. Detector = peak, Sweep time = No faster than coupled (auto) time, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100 kHz is a reference level and is used as 20 dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup

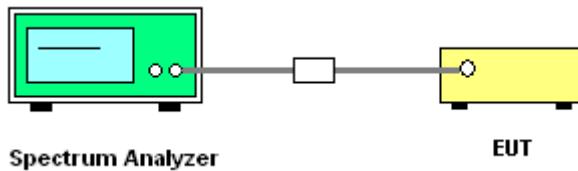

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 30 dB down from the highest emission level within the authorized band.


3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.4.3 Test Procedure

1. The testing follows the ANSI C63.10 Section 11.11.3 Emission level measurement.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Set RBW = 100 kHz, VBW = 300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

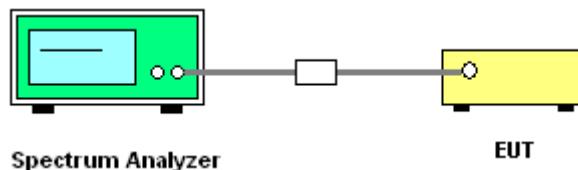

3.4.5 Test Result of Conducted Band Edges Plots

Please refer to Appendix A.

3.4.6 Test Result of Conducted Spurious Emission Plots

Please refer to Appendix A.



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.



3.5.3 Test Procedures


1. The testing follows the ANSI C63.10 Section 11.12.1 Radiated emission measurements.
2. The EUT is arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
4. The EUT is set 3 meters away from the receiving antenna, which is mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-”.
7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-”.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW = 100 kHz for $f < 1$ GHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW = 3 MHz for $f \geq 1$ GHz for peak measurement.

For average measurement:


 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated test below 30MHz

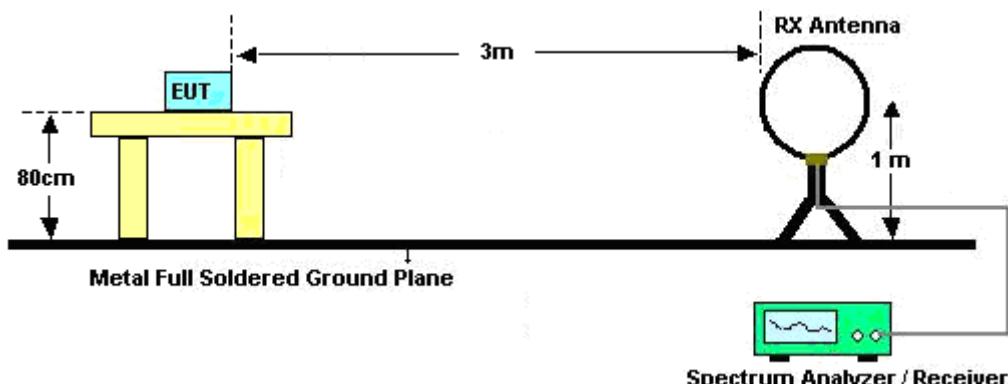


For radiated test from 30MHz to 1GHz

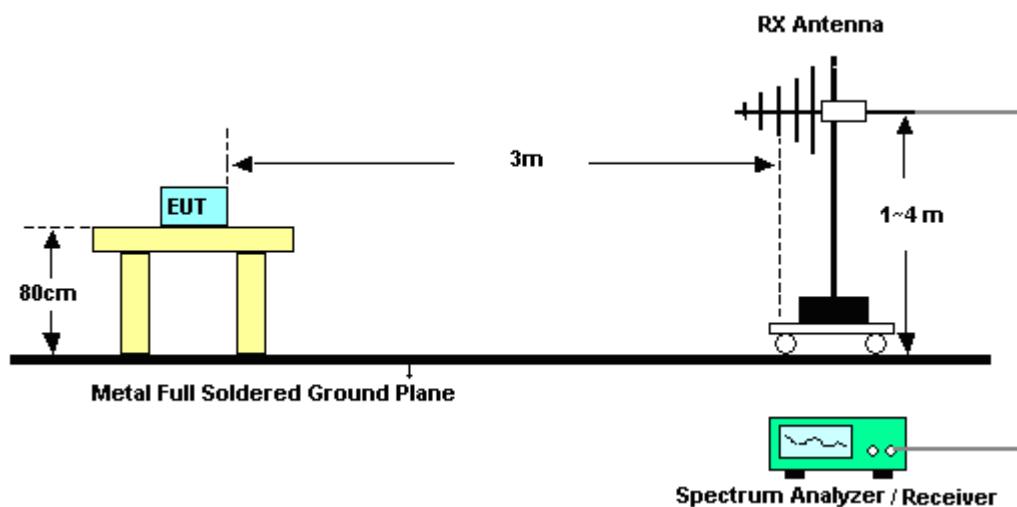

For radiated test from 1GHz to 18GHz

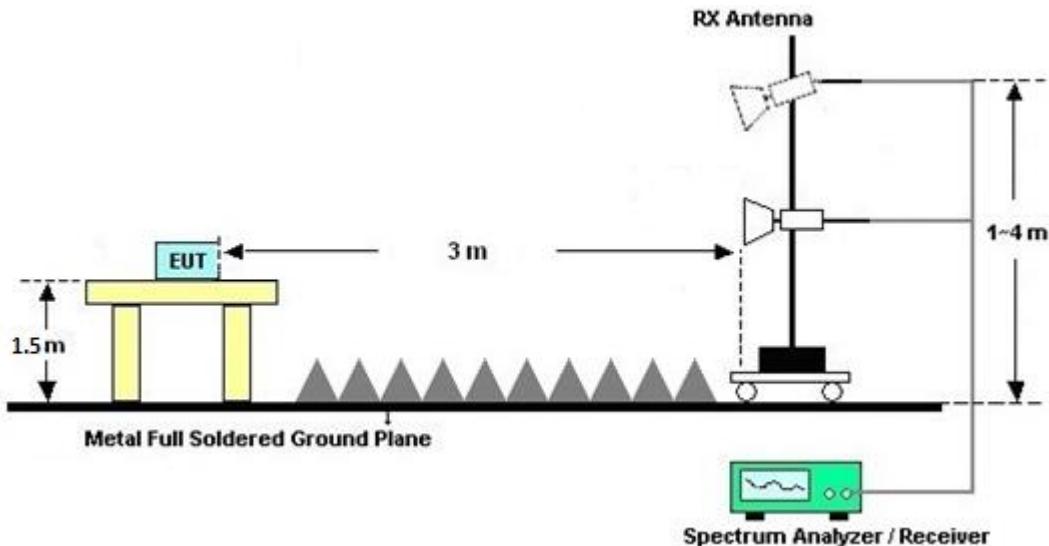

For radiated test above 18GHz

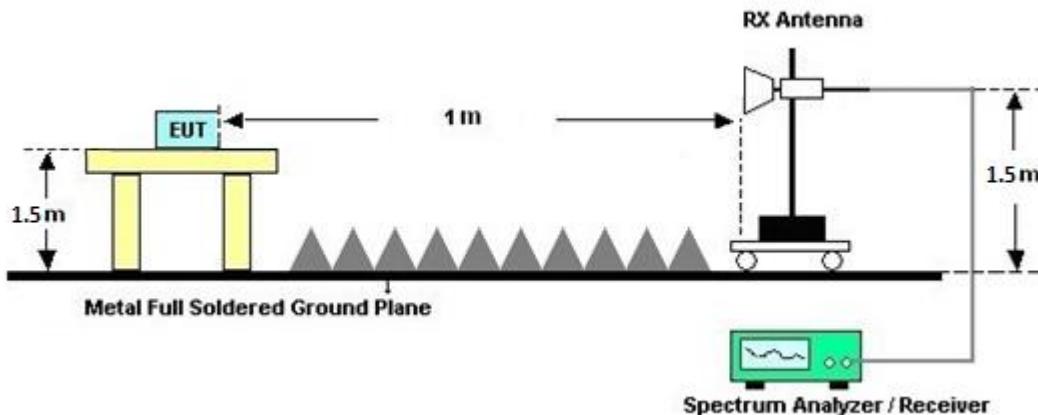

3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result comes out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30 MHz ~ 10th Harmonic)

Please refer to Appendix C.



3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.6.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
6. The frequency range from 150 kHz to 30 MHz is scanned.
7. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9 kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.6.4 Test Setup

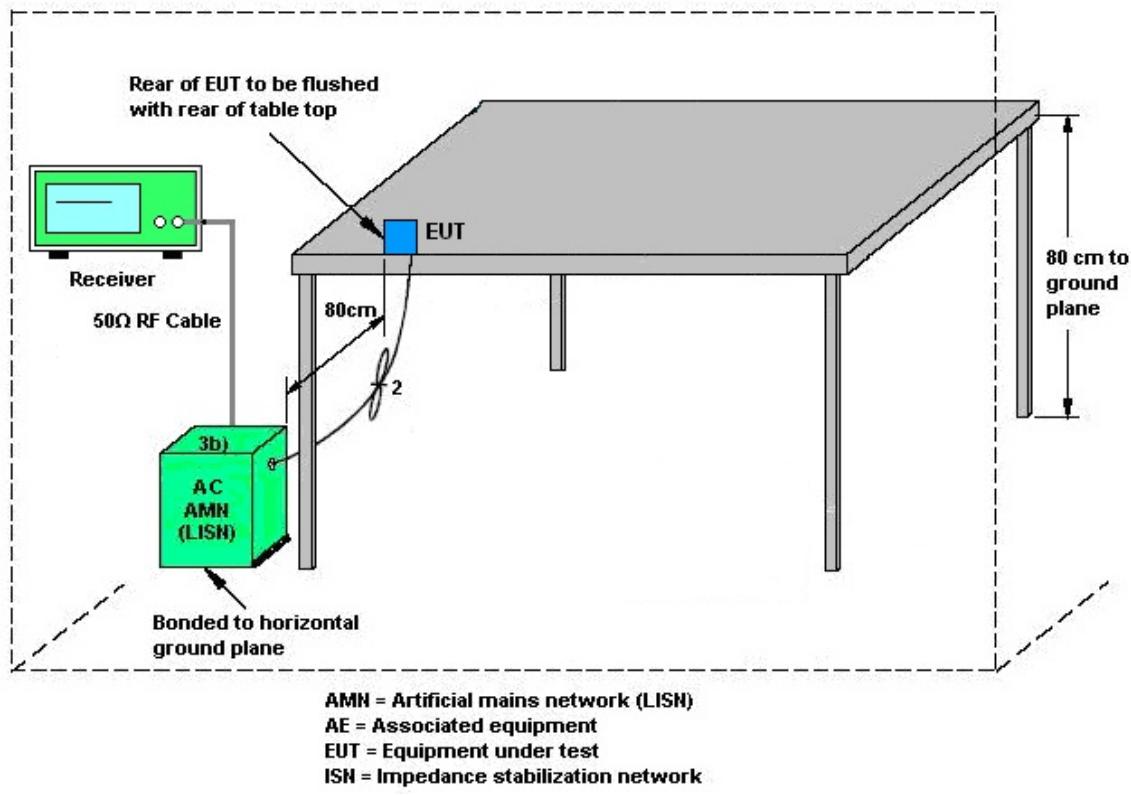

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, 15.213, 15.217, 15.219, 15.221, or § 15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

3.7.2 Antenna Anti-Replacement Construction

Antenna permanently attached.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	Keysight	N9038A(MXE)	MY54130085	N/A	Oct. 16, 2024	Aug. 18, 2025~Aug. 19, 2025	Oct. 15, 2025	Radiation (03CH20-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Aug. 29, 2024	Aug. 18, 2025~Aug. 19, 2025	Aug. 28, 2025	Radiation (03CH20-HY)
Preamplifier	EMEC	EM18G40G	060871	18GHz~40GHz	Aug. 23, 2024	Aug. 18, 2025~Aug. 19, 2025	Aug. 22, 2025	Radiation (03CH20-HY)
Controller	ChainTek	3000-1	N/A	Control Turn table & Ant Mast	N/A	Aug. 18, 2025~Aug. 19, 2025	N/A	Radiation (03CH20-HY)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	Aug. 18, 2025~Aug. 19, 2025	N/A	Radiation (03CH20-HY)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	Aug. 18, 2025~Aug. 19, 2025	N/A	Radiation (03CH20-HY)
Signal Analyzer	Keysight	N9010B	MY60240520	N/A	Dec. 09, 2024	Aug. 18, 2025~Aug. 19, 2025	Dec. 08, 2025	Radiation (03CH20-HY)
Bilog Antenna	TESEQ	CBL 6111D&00800 N1D01N-06	55606 & 08	30MHz~1GHz	Nov. 27, 2024	Aug. 18, 2025~Aug. 19, 2025	Nov. 26, 2025	Radiation (03CH20-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	02360	1GHz-18GHz	Nov. 01, 2024	Aug. 18, 2025~Aug. 19, 2025	Oct. 31, 2025	Radiation (03CH20-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	1223	18GHz-40GHz	Jul. 02, 2025	Aug. 18, 2025~Aug. 19, 2025	Jul. 01, 2026	Radiation (03CH20-HY)
Preamplifier	COM-POWER	PAM-103	18020201	1MHz-1000MHz	Dec. 31, 2024	Aug. 18, 2025~Aug. 19, 2025	Dec. 30, 2025	Radiation (03CH20-HY)
Amplifier	EMCI	EMC118A45SE	980792	N/A	Nov. 12, 2024	Aug. 18, 2025~Aug. 19, 2025	Nov. 11, 2025	Radiation (03CH20-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	519229/2,80 4015/2,8040 27/2	N/A	Jan. 16, 2025	Aug. 18, 2025~Aug. 19, 2025	Jan. 15, 2026	Radiation (03CH20-HY)
Hygrometer	TECPEL	DTM-303A	TP211382	N/A	Mar. 31, 2025	Aug. 18, 2025~Aug. 19, 2025	Mar. 30, 2026	Radiation (03CH20-HY)
Software	Audix	N/A	RK-002156	N/A	N/A	Aug. 18, 2025~Aug. 19, 2025	N/A	Radiation (03CH20-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Aug. 05, 2025	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102388	9kHz~3.6GHz	Dec. 10, 2024	Aug. 05, 2025	Dec. 09, 2025	Conduction (CO05-HY)
Hygrometer	Testo	608-H1	34913912	N/A	Oct. 14, 2024	Aug. 05, 2025	Oct. 13, 2025	Conduction (CO05-HY)
Four-Line V-Network	TESEQ	NNB 52	36122	9kHz~30MHz	Mar. 26, 2025	Aug. 05, 2025	Mar. 25, 2026	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100081	9kHz~30MHz	Jul. 25, 2025	Aug. 05, 2025	Jul. 24, 2026	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32	N/A	N/A	N/A	Aug. 05, 2025	N/A	Conduction (CO05-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-FN	00691	N/A	Jul. 29, 2025	Aug. 05, 2025	Jul. 28, 2026	Conduction (CO05-HY)
LISN Cable	MVE	RG-400	MQT240825 01	9KHz - 30MHz	Oct. 15, 2024	Aug. 05, 2025	Oct. 14, 2025	Conduction (CO05-HY)

**FCC RADIO TEST REPORT**

Report No. : FR572506A

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Hygrometer	TECPEL	DTM-303A	TP201996	N/A	Nov. 01, 2024	Aug. 07, 2025 ~ Aug. 19, 2025	Oct. 31, 2025	Conducted (TH05-HY)
Power Sensor	DARE	RPR3008W	RPR8W-230 10013 (NO:100)	10MHz~8GHz	Jul. 18, 2025	Aug. 07, 2025 ~ Aug. 19, 2025	Jul. 17, 2026	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV3044	101467	10HZ~44GHZ	Jan. 14, 2025	Aug. 07, 2025 ~ Aug. 19, 2025	Jan. 13, 2026	Conducted (TH05-HY)
Software	Sporton	BTWIFI_Final _version_2405 13	N/A	Conducted Other Test Item	N/A	Aug. 07, 2025 ~ Aug. 19, 2025	N/A	Conducted (TH05-HY)



5 Measurement Uncertainty

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2U _c (y))	3.7 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2U _c (y))	6.7 dB
---	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2U _c (y))	5.4 dB
---	--------

Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2U _c (y))	5.6 dB
---	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2U _c (y))	5.7 dB
---	--------

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Bryant Liu			Temperature:	21~25	°C
Test Date:	2025/08/07 ~ 2025/08/19			Relative Humidity:	51~54	%

<u>TEST RESULTS DATA</u> <u>6dB and 99% Occupied Bandwidth</u>								
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE GFSK	1Mbps	1	0	2402	1.024	0.690	0.50	Pass
BLE GFSK	1Mbps	1	20	2442	1.022	0.666	0.50	Pass
BLE GFSK	1Mbps	1	39	2480	1.022	0.688	0.50	Pass

<u>TEST RESULTS DATA</u> <u>Average Power Table</u>										
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE GFSK	1Mbps	1	0	2402	3.48	30.00	1.85	5.33	36.00	Pass
BLE GFSK	1Mbps	1	20	2442	3.02	30.00	1.85	4.87	36.00	Pass
BLE GFSK	1Mbps	1	39	2480	3.03	30.00	1.85	4.88	36.00	Pass

<u>TEST RESULTS DATA</u> <u>Peak Power Density</u>									
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE GFSK	1Mbps	1	0	2402	2.65	-14.87	1.85	8.00	Pass
BLE GFSK	1Mbps	1	20	2442	2.09	-15.40	1.85	8.00	Pass
BLE GFSK	1Mbps	1	39	2480	2.13	-15.34	1.85	8.00	Pass


Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.



Number of TX = 1, Ant. 1 (Measured)


6dB Bandwidth

<1M>

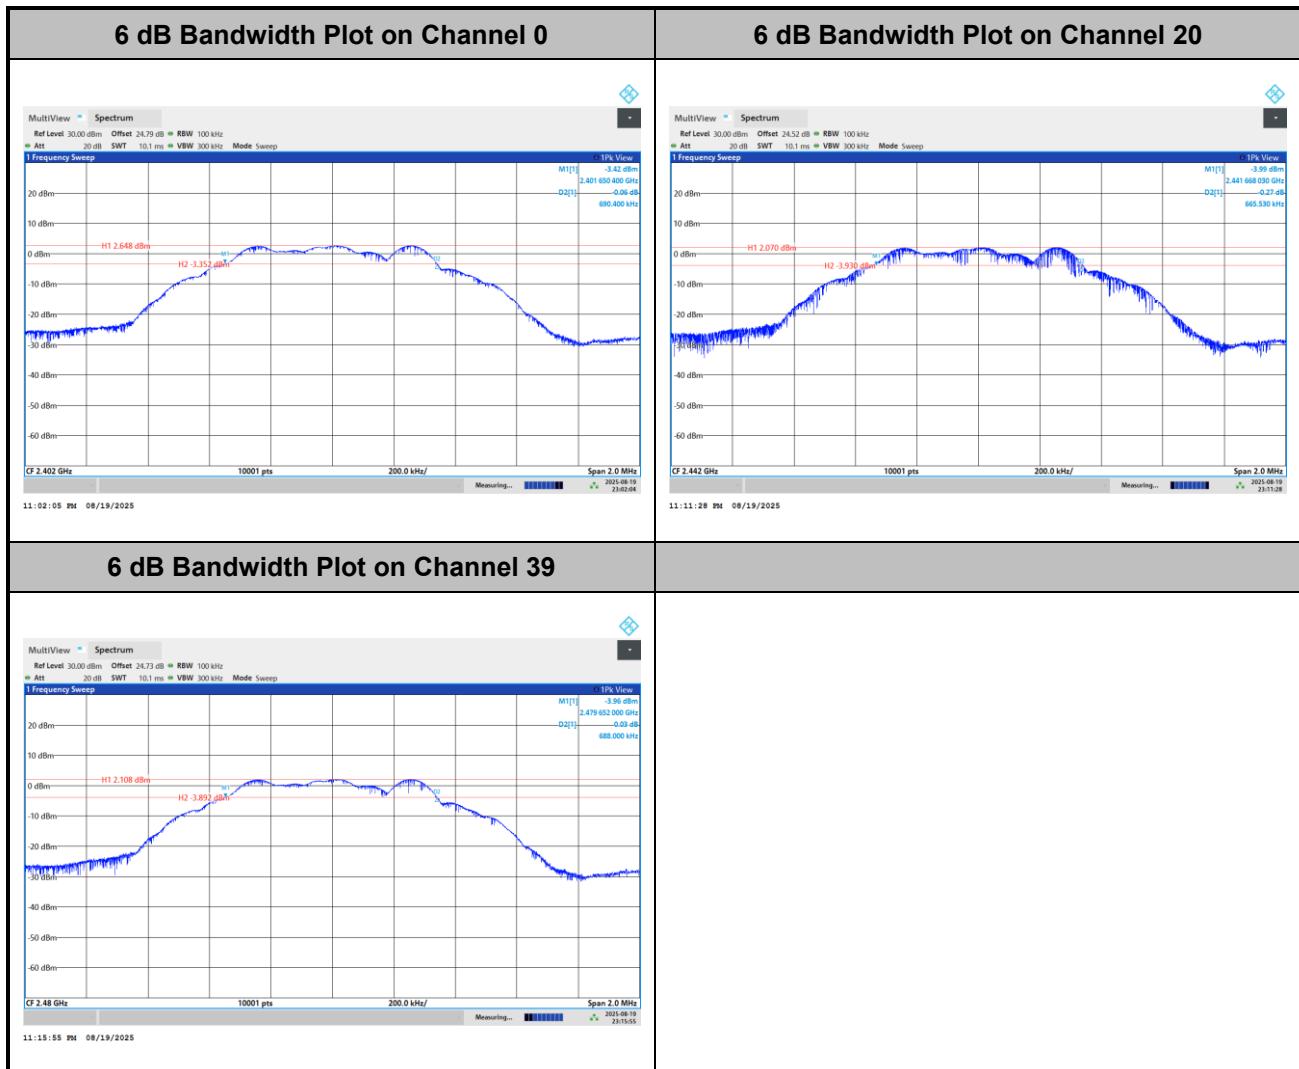

**99% Occupied Bandwidth**

<1M>

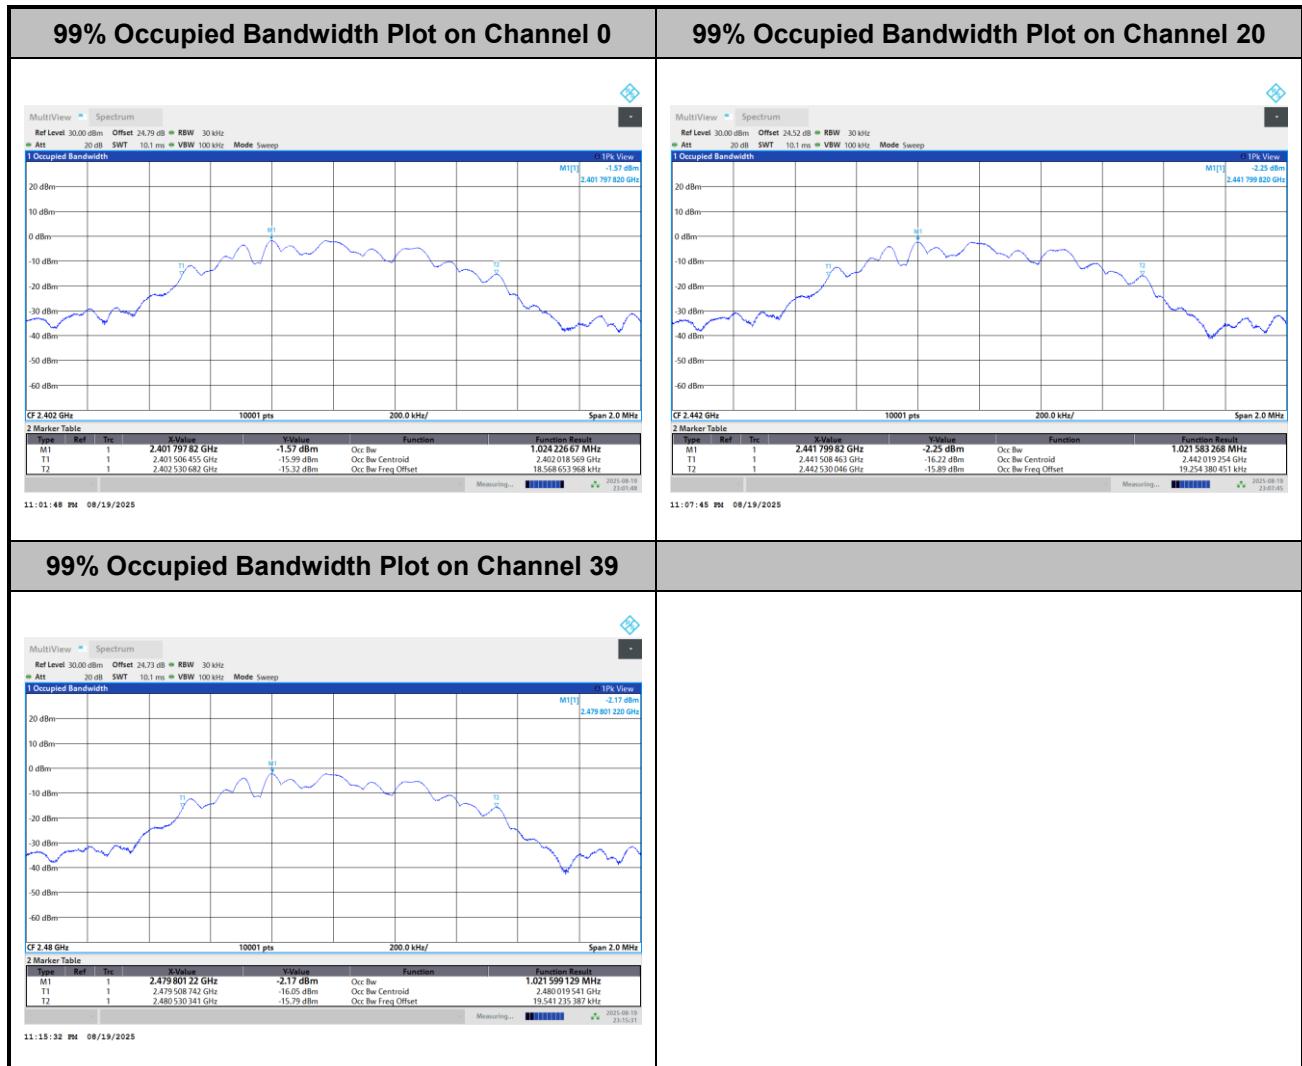




Power Spectral Density (dBm/3kHz)


<1M>




**Band Edge and Conducted Spurious Emission**

<1M>

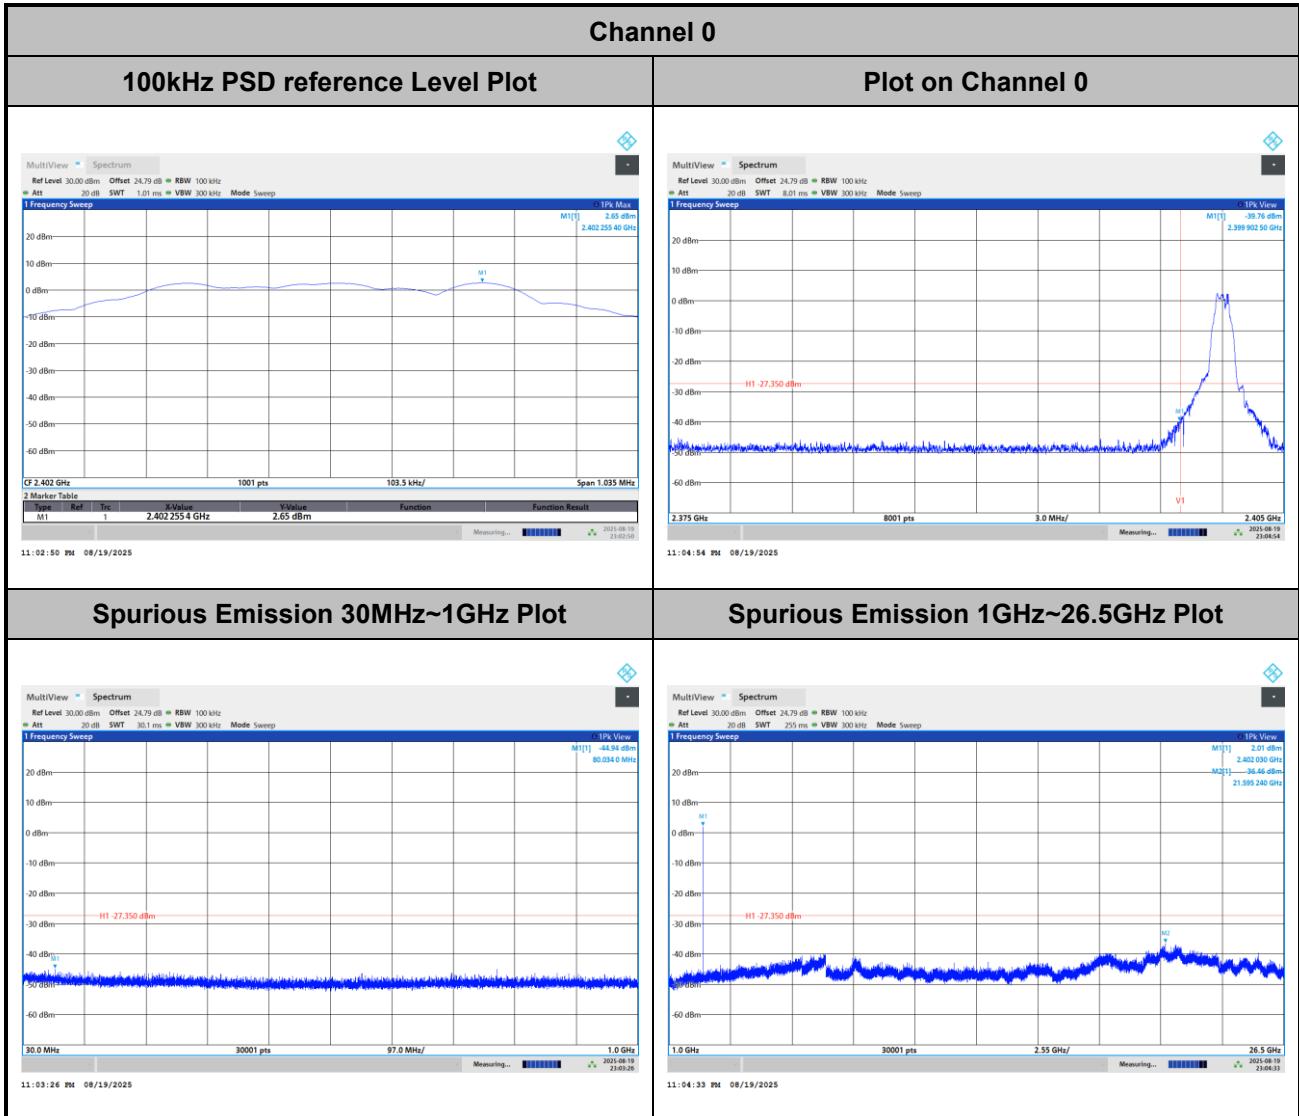

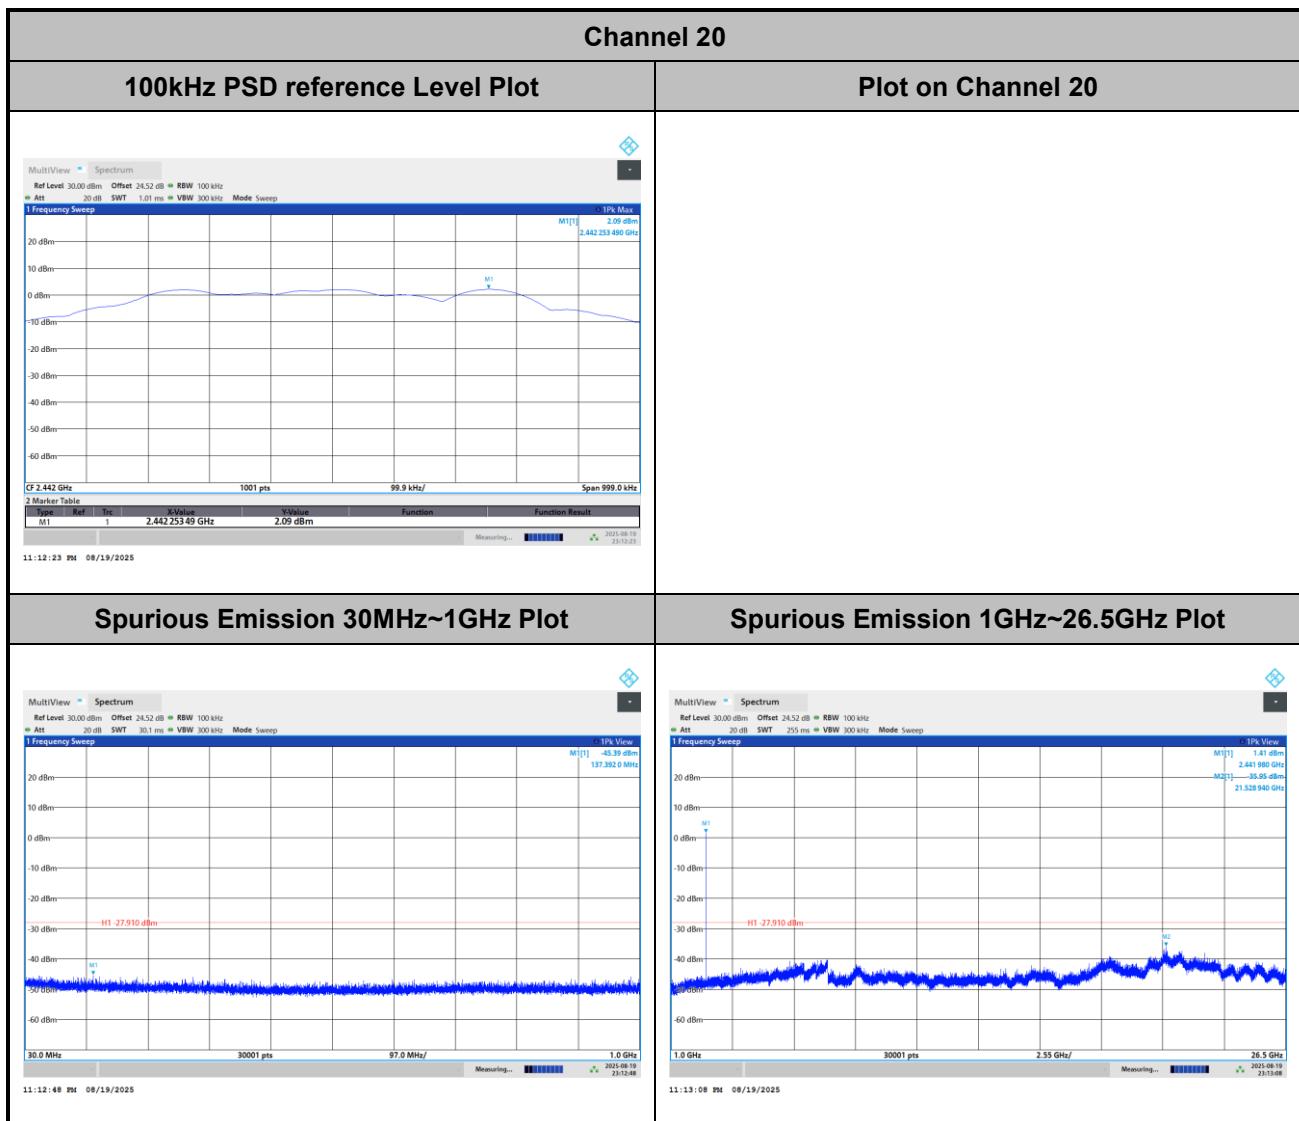

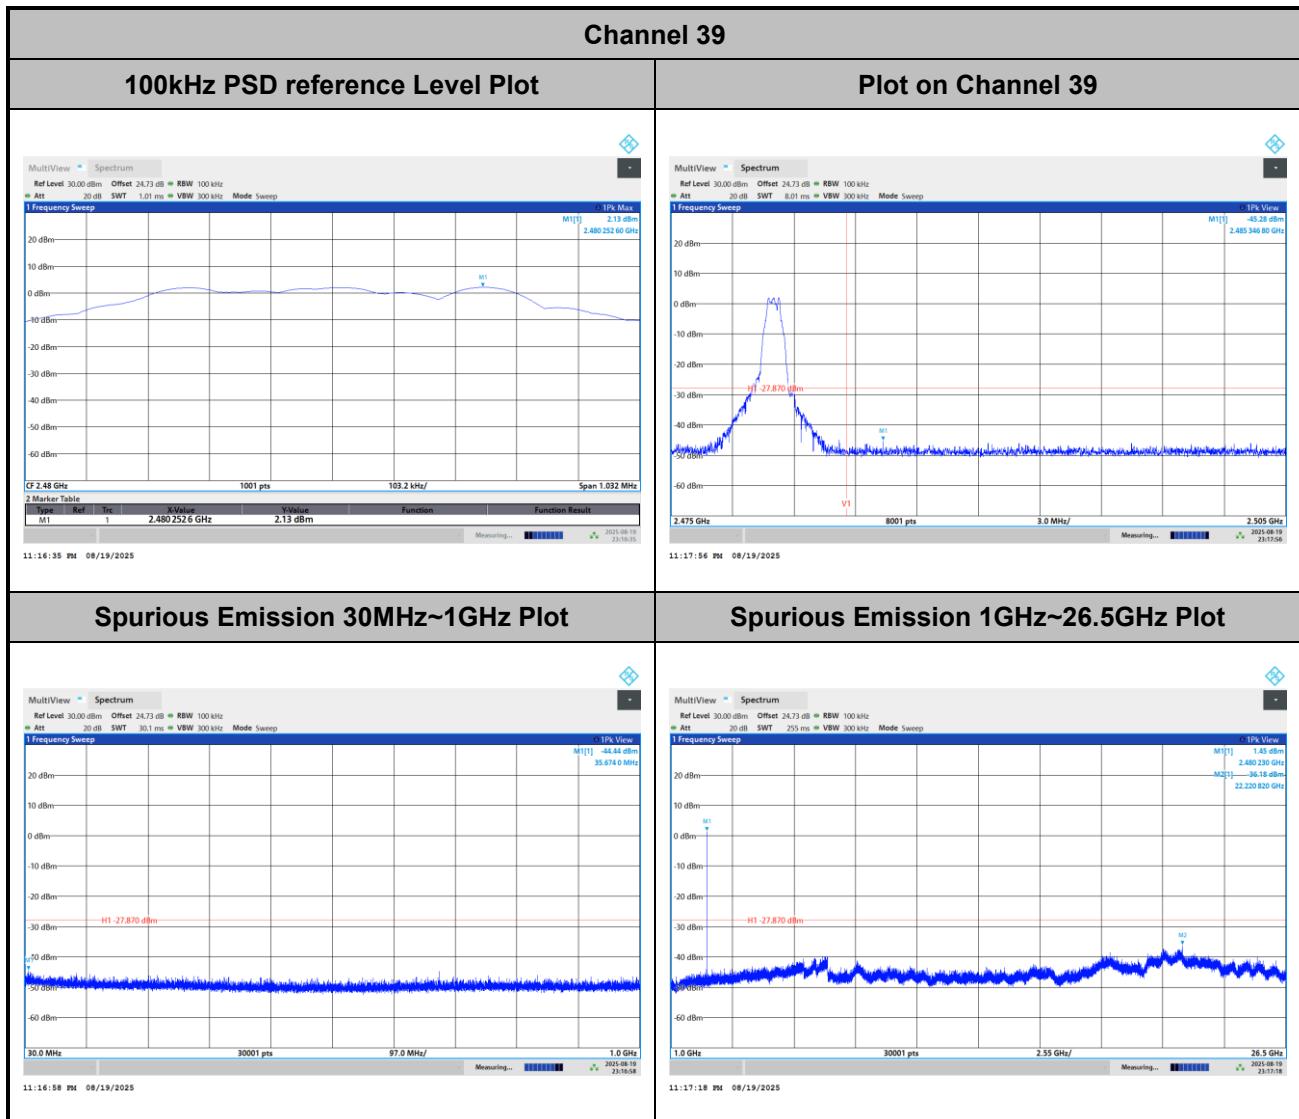




Appendix B. AC Conducted Emission Test Results

Test Engineer :	Brian Chen	Temperature :	23~26°C
		Relative Humidity :	45~55%

EUT Information

Report NO : 572506
 Test Mode : Mode 3
 Test Voltage : Power From System
 Phase : Line

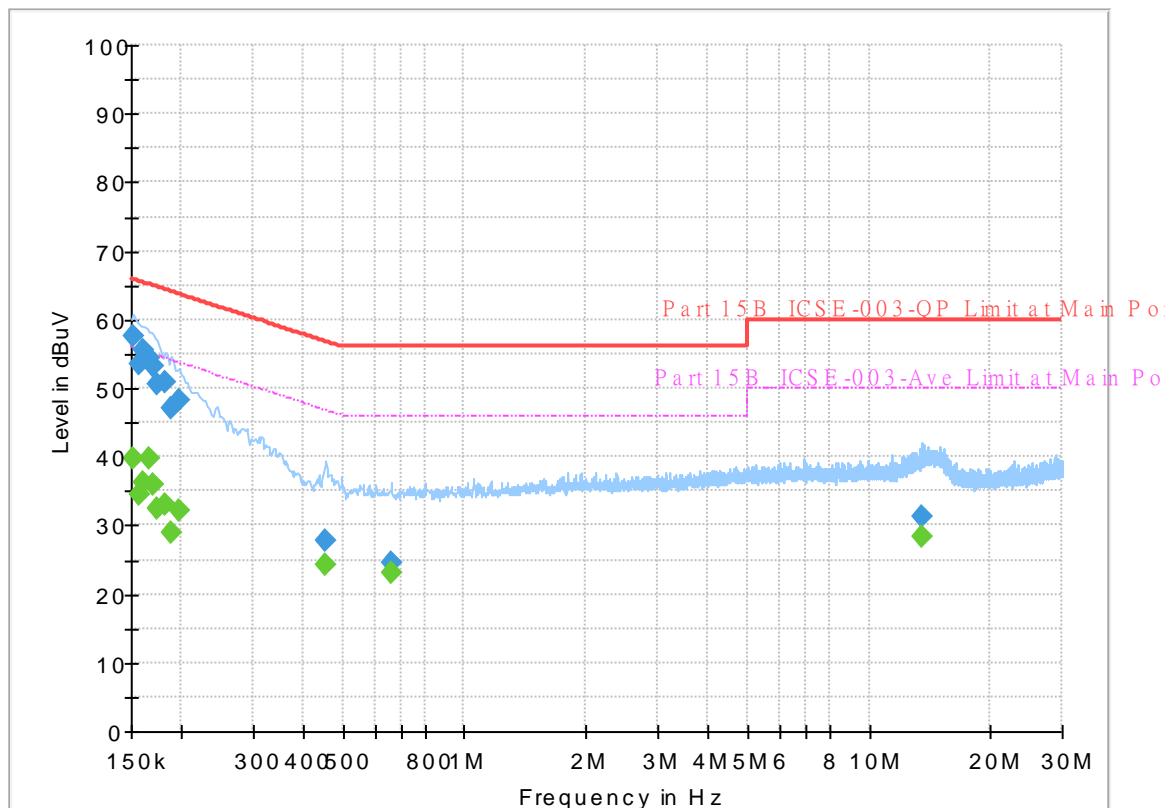
Full Spectrum**Final Result**

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152250	---	39.85	55.88	16.03	L1	OFF	19.7
0.152250	57.46	---	65.88	8.42	L1	OFF	19.7
0.156750	---	34.48	55.63	21.15	L1	OFF	19.7
0.156750	53.51	---	65.63	12.12	L1	OFF	19.7
0.161250	---	36.16	55.40	19.24	L1	OFF	19.7
0.161250	55.54	---	65.40	9.86	L1	OFF	19.7
0.165750	---	39.62	55.17	15.55	L1	OFF	19.7
0.165750	54.48	---	65.17	10.69	L1	OFF	19.7
0.170250	---	35.92	54.95	19.03	L1	OFF	19.7
0.170250	53.29	---	64.95	11.66	L1	OFF	19.7
0.174750	---	32.42	54.73	22.31	L1	OFF	19.7
0.174750	50.68	---	64.73	14.05	L1	OFF	19.7
0.181500	---	33.18	54.42	21.24	L1	OFF	19.7
0.181500	50.75	---	64.42	13.67	L1	OFF	19.7
0.188250	---	28.85	54.11	25.26	L1	OFF	19.7
0.188250	46.98	---	64.11	17.13	L1	OFF	19.7
0.197250	---	32.08	53.73	21.65	L1	OFF	19.7
0.197250	48.24	---	63.73	15.49	L1	OFF	19.7
0.453750	---	24.14	46.81	22.67	L1	OFF	19.7
0.453750	27.66	---	56.81	29.15	L1	OFF	19.7
0.658500	---	23.16	46.00	22.84	L1	OFF	19.8

0.658500	24.65	---	56.00	31.35	L1	OFF	19.8
13.479000	---	28.33	50.00	21.67	L1	OFF	20.5
13.479000	31.37	---	60.00	28.63	L1	OFF	20.5

EUT Information

Report NO : 572506
 Test Mode : Mode 3
 Test Voltage : Power From System
 Phase : Neutral

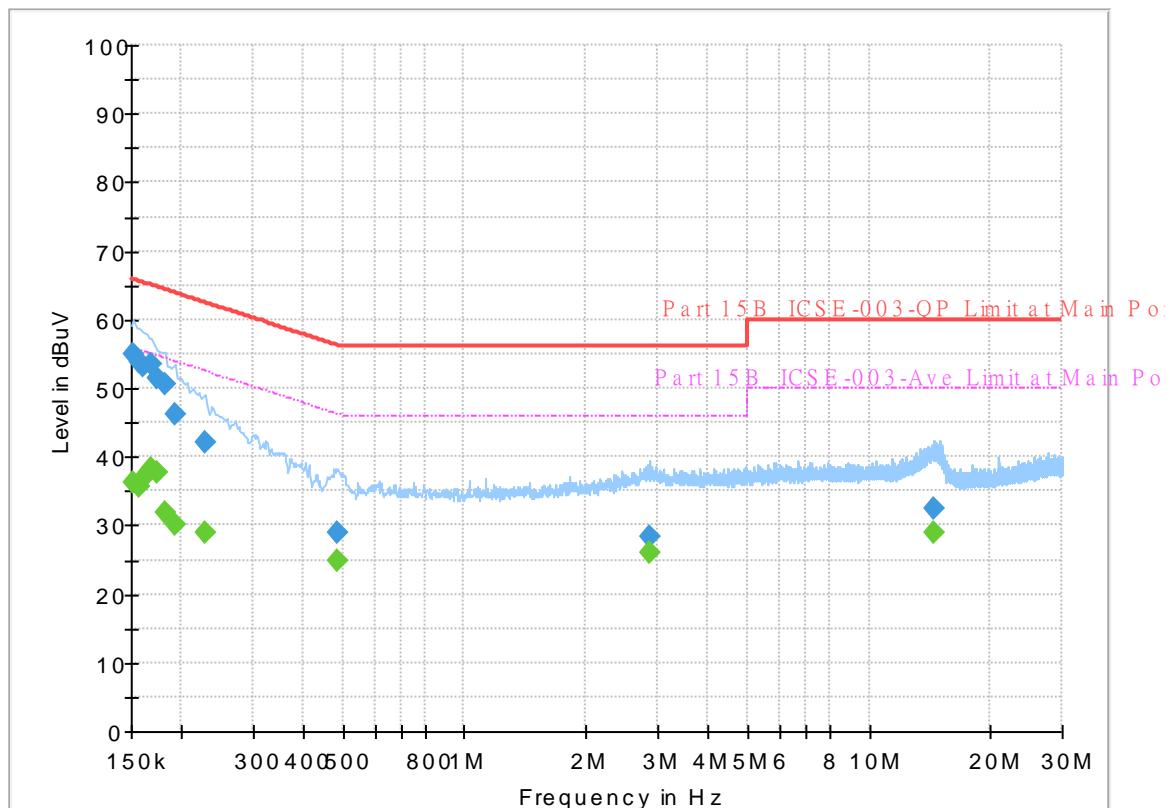Full Spectrum**Final Result**

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152250	---	36.19	55.88	19.69	N	OFF	19.7
0.152250	54.90	---	65.88	10.98	N	OFF	19.7
0.156750	---	35.70	55.63	19.93	N	OFF	19.7
0.156750	53.92	---	65.63	11.71	N	OFF	19.7
0.161250	---	36.74	55.40	18.66	N	OFF	19.7
0.161250	53.21	---	65.40	12.19	N	OFF	19.7
0.168000	---	38.43	55.06	16.63	N	OFF	19.7
0.168000	53.59	---	65.06	11.47	N	OFF	19.7
0.174750	---	37.85	54.73	16.88	N	OFF	19.7
0.174750	51.47	---	64.73	13.26	N	OFF	19.7
0.181500	---	31.95	54.42	22.47	N	OFF	19.7
0.181500	50.51	---	64.42	13.91	N	OFF	19.7
0.192750	---	29.98	53.92	23.94	N	OFF	19.7
0.192750	46.31	---	63.92	17.61	N	OFF	19.7
0.228750	---	28.91	52.50	23.59	N	OFF	19.7
0.228750	41.99	---	62.50	20.51	N	OFF	19.7
0.485250	---	24.86	46.25	21.39	N	OFF	19.7
0.485250	29.06	---	56.25	27.19	N	OFF	19.7
2.856750	---	25.89	46.00	20.11	N	OFF	19.9
2.856750	28.45	---	56.00	27.55	N	OFF	19.9
14.502750	---	28.98	50.00	21.02	N	OFF	20.5

CO05-HY

Report No. : FR572506A
8/5/2025

14.502750	32.32	---	60.00	27.68	N	OFF	20.5
-----------	-------	-----	-------	-------	---	-----	------



Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	John Chuang, David Dai and Sam Chou	Temperature :	19.8~22.5°C
		Relative Humidity :	64.9~70.3%

Note symbol

-L	Low channel location
-R	High channel location

C1. Radiated Spurious Emission Test Modes





Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	1	Bluetooth-LE GSFK	00	2402	1Mbps	-	-
Mode 2	2400-2483.5	1	Bluetooth-LE GSFK	20	2442	1Mbps	-	-
Mode 3	2400-2483.5	1	Bluetooth-LE GSFK	39	2480	1Mbps	-	-
Mode 4	2400-2483.5	1	Bluetooth-LE GSFK	39	2480	1Mbps	-	LF
Mode 5	2400-2483.5	1	Bluetooth-LE GSFK	39	2480	1Mbps	-	SHF







C2. Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
1	Bluetooth-LE GSFK	00	2381.12	41.98	54.00	-12.02	H	Avg.	Pass	-	Band Edge
	Bluetooth-LE GSFK	00	4804.00	42.34	54.00	-11.66	V	Avg.	Pass	-	Harmonic
2	Bluetooth-LE GSFK	20	2496.98	42.67	54.00	-11.33	V	Avg.	Pass	-	Band Edge
	Bluetooth-LE GSFK	20	4884.00	44.10	54.00	-9.90	H	Avg.	Pass	-	Harmonic
3	Bluetooth-LE GSFK	39	2483.52	45.58	54.00	-8.42	H	Avg.	Pass	-	Band Edge
	Bluetooth-LE GSFK	39	4960.00	47.05	54.00	-6.95	H	Avg.	Pass	-	Harmonic
4	LF	39	947.62	35.32	46.00	-10.68	H	Peak	Pass	-	LF
5	SHF	39	24811.00	41.57	74.00	-32.43	H	Peak	Pass	-	SHF

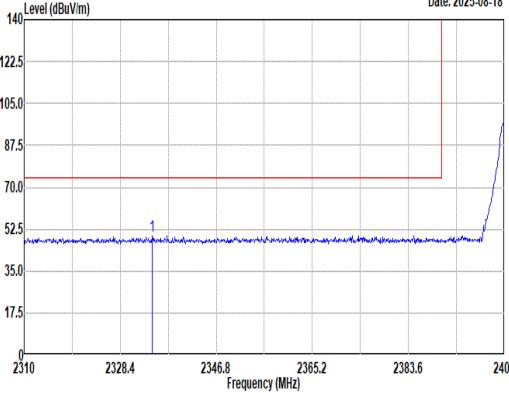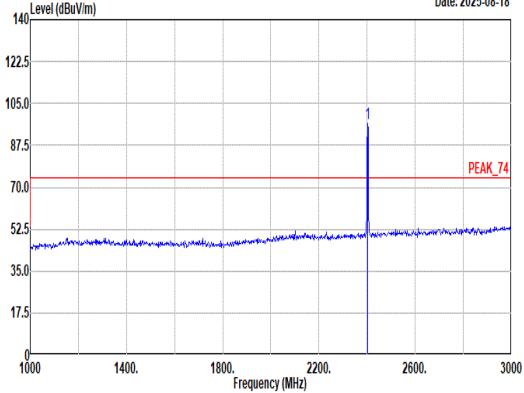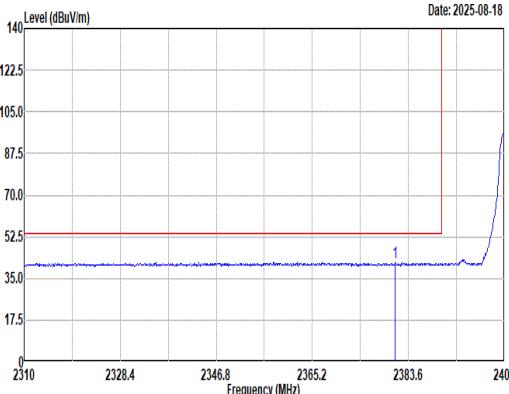
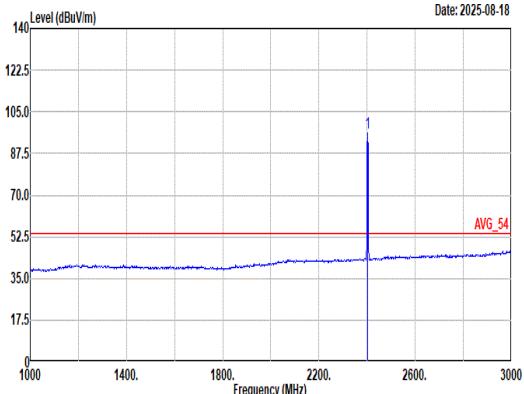



Mode	1																																																																																																					
	Band Edge																																																																																																					
	2400-2483.5_Bluetooth-LE GSFK_CH00_2402MHz																																																																																																					
ANT	1																																																																																																					
Pol.	Horizontal	Fundamental																																																																																																				
Peak	 <p>Site : 03CH20-HY Condition: PEAK_BE_74_3m_HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"><thead><tr><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2334.47</td><td>49.90</td><td>74.00</td><td>-24.10</td><td>48.69</td><td>27.26</td><td>8.52</td><td>36.25</td><td>9.68</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>183</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>360 Peak</td></tr></tbody></table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2334.47	49.90	74.00	-24.10	48.69	27.26	8.52	36.25	9.68										183										360 Peak	 <p>Site : 03CH20-HY Condition: PEAK_74_3m_HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"><thead><tr><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>96.79</td><td>-----</td><td>-----</td><td>87.32</td><td>27.42</td><td>8.64</td><td>36.27</td><td>9.68</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>183</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>360 Peak</td></tr></tbody></table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	96.79	-----	-----	87.32	27.42	8.64	36.27	9.68										183										360 Peak
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	2334.47	49.90	74.00	-24.10	48.69	27.26	8.52	36.25	9.68																																																																																													
									183																																																																																													
									360 Peak																																																																																													
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	2402.00	96.79	-----	-----	87.32	27.42	8.64	36.27	9.68																																																																																													
									183																																																																																													
									360 Peak																																																																																													
 <p>Site : 03CH20-HY Condition: AVG_BE_54_3m_HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:11.000kHz SWT:Auto</p> <table border="1"><thead><tr><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2381.12</td><td>41.98</td><td>54.00</td><td>-12.02</td><td>32.73</td><td>27.22</td><td>8.61</td><td>36.26</td><td>9.68</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>183</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>360 Average</td></tr></tbody></table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2381.12	41.98	54.00	-12.02	32.73	27.22	8.61	36.26	9.68										183										360 Average	 <p>Site : 03CH20-HY Condition: AVG_54_3m_HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:11.000kHz SWT:Auto</p> <table border="1"><thead><tr><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>96.25</td><td>-----</td><td>-----</td><td>86.78</td><td>27.42</td><td>8.64</td><td>36.27</td><td>9.68</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>183</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>360 Average</td></tr></tbody></table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	96.25	-----	-----	86.78	27.42	8.64	36.27	9.68										183										360 Average	
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	2381.12	41.98	54.00	-12.02	32.73	27.22	8.61	36.26	9.68																																																																																													
									183																																																																																													
									360 Average																																																																																													
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	2402.00	96.25	-----	-----	86.78	27.42	8.64	36.27	9.68																																																																																													
									183																																																																																													
									360 Average																																																																																													

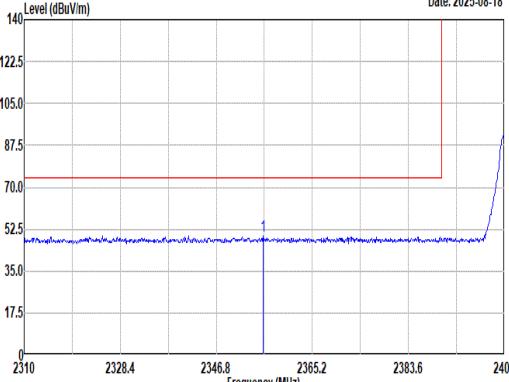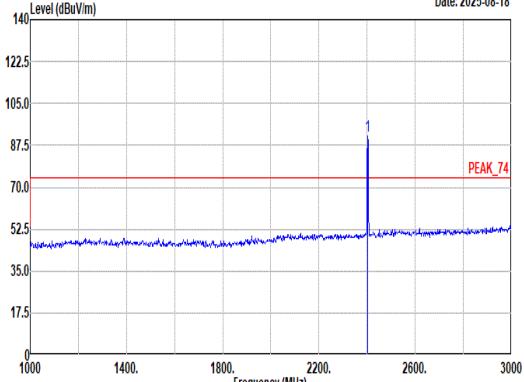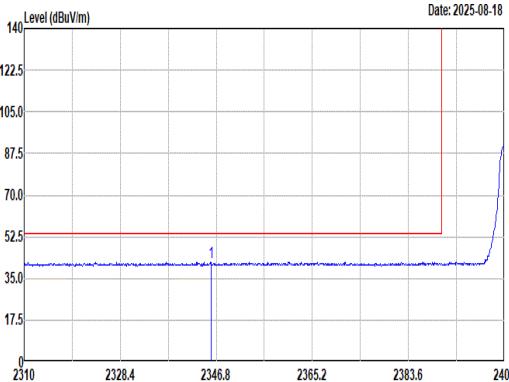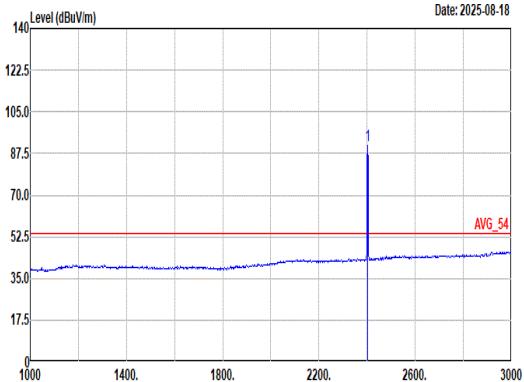







Mode	1																																																													
	Band Edge																																																													
	2400-2483.5_Bluetooth-LE GSFK_CH00_2402MHz																																																													
ANT	1																																																													
Pol.	Vertical	Fundamental																																																												
Peak	 <p>Site : 03CH20-HY Condition: PEAK_BE_74_3m_HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>2355.82</td><td>49.72</td><td>74.00</td><td>-24.28</td><td>48.44</td><td>27.30</td><td>8.56</td><td>36.26</td><td>9.68 314 193 Peak</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					1	2355.82	49.72	74.00	-24.28	48.44	27.30	8.56	36.26	9.68 314 193 Peak	 <p>Site : 03CH20-HY Condition: PEAK_74_3m_HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>91.51</td><td>-----</td><td>-----</td><td>82.04</td><td>27.42</td><td>8.64</td><td>36.27</td><td>9.68 314 193 Peak</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					1	2402.00	91.51	-----	-----	82.04	27.42	8.64	36.27	9.68 314 193 Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																									
1	2355.82	49.72	74.00	-24.28	48.44	27.30	8.56	36.26	9.68 314 193 Peak																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																									
1	2402.00	91.51	-----	-----	82.04	27.42	8.64	36.27	9.68 314 193 Peak																																																					
 <p>Site : 03CH20-HY Condition: AVG_BE_54_3m_HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:11.000kHz SWT:Auto</p> <table border="1"><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>2345.79</td><td>41.86</td><td>54.00</td><td>-12.14</td><td>32.63</td><td>27.26</td><td>8.54</td><td>36.25</td><td>9.68 314 193 Average</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					1	2345.79	41.86	54.00	-12.14	32.63	27.26	8.54	36.25	9.68 314 193 Average	 <p>Site : 03CH20-HY Condition: AVG_54_3m_HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:11.000kHz SWT:Auto</p> <table border="1"><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>91.07</td><td>-----</td><td>-----</td><td>81.60</td><td>27.42</td><td>8.64</td><td>36.27</td><td>9.68 314 193 Average</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					1	2402.00	91.07	-----	-----	81.60	27.42	8.64	36.27	9.68 314 193 Average	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																									
1	2345.79	41.86	54.00	-12.14	32.63	27.26	8.54	36.25	9.68 314 193 Average																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																									
1	2402.00	91.07	-----	-----	81.60	27.42	8.64	36.27	9.68 314 193 Average																																																					
Avg																																																														

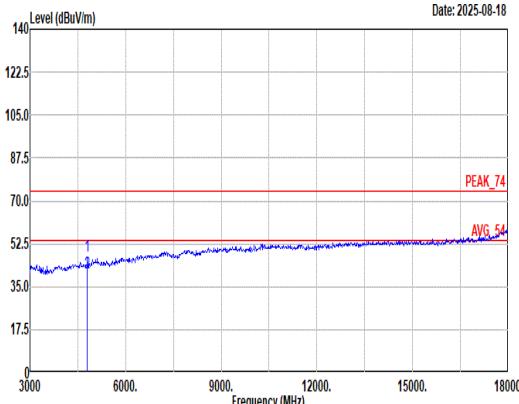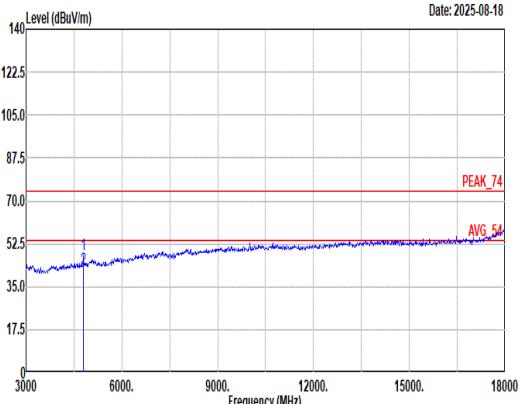

Mode	1																																																																																	
	Harmonic																																																																																	
	2400-2483.5_Bluetooth-LE GSFK_CH00_2402MHz																																																																																	
ANT	1																																																																																	
Pol.	Horizontal																																																																																	
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) from 3000 to 18000. The plot shows a blue line representing the measured spectrum with a red line at 74 dBuV/m labeled 'PEAK_74' and a blue line at 54 dBuV/m labeled 'AVG_54'. A vertical blue line marks the peak at 4804.00 MHz.</p> <p>Site : 03CH20-HY Condition: PEAK_74 3m HF_91200_02360_241101 HORIZONTAL</p> <table border="1"><thead><tr><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th><th></th></tr></thead><tbody><tr><td>1</td><td>4804.00</td><td>47.35</td><td>74.00</td><td>-26.65</td><td>39.75</td><td>32.23</td><td>12.25</td><td>37.51</td><td>0.63 103 127 Peak</td></tr><tr><td>2</td><td>4804.00</td><td>40.83</td><td>54.00</td><td>-13.17</td><td>33.23</td><td>32.23</td><td>12.25</td><td>37.51</td><td>0.63 103 127 Average</td></tr></tbody></table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Remark		1	4804.00	47.35	74.00	-26.65	39.75	32.23	12.25	37.51	0.63 103 127 Peak	2	4804.00	40.83	54.00	-13.17	33.23	32.23	12.25	37.51	0.63 103 127 Average	 <p>Level (dBuV/m) vs Frequency (MHz) from 3000 to 18000. The plot shows a blue line representing the measured spectrum with a red line at 74 dBuV/m labeled 'PEAK_74' and a blue line at 54 dBuV/m labeled 'AVG_54'. A vertical blue line marks the peak at 4804.00 MHz.</p> <p>Site : 03CH20-HY Condition: PEAK_74 3m HF_91200_02360_241101 VERTICAL</p> <table border="1"><thead><tr><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th><th></th></tr></thead><tbody><tr><td>1</td><td>4804.00</td><td>48.06</td><td>74.00</td><td>-25.94</td><td>40.46</td><td>32.23</td><td>12.25</td><td>37.51</td><td>0.63 100 210 Peak</td></tr><tr><td>2</td><td>4804.00</td><td>42.34</td><td>54.00</td><td>-11.66</td><td>34.74</td><td>32.23</td><td>12.25</td><td>37.51</td><td>0.63 100 210 Average</td></tr></tbody></table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Remark		1	4804.00	48.06	74.00	-25.94	40.46	32.23	12.25	37.51	0.63 100 210 Peak	2	4804.00	42.34	54.00	-11.66	34.74	32.23	12.25	37.51	0.63 100 210 Average
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																										
1	4804.00	47.35	74.00	-26.65	39.75	32.23	12.25	37.51	0.63 103 127 Peak																																																																									
2	4804.00	40.83	54.00	-13.17	33.23	32.23	12.25	37.51	0.63 103 127 Average																																																																									
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																										
1	4804.00	48.06	74.00	-25.94	40.46	32.23	12.25	37.51	0.63 100 210 Peak																																																																									
2	4804.00	42.34	54.00	-11.66	34.74	32.23	12.25	37.51	0.63 100 210 Average																																																																									
Avg																																																																																		

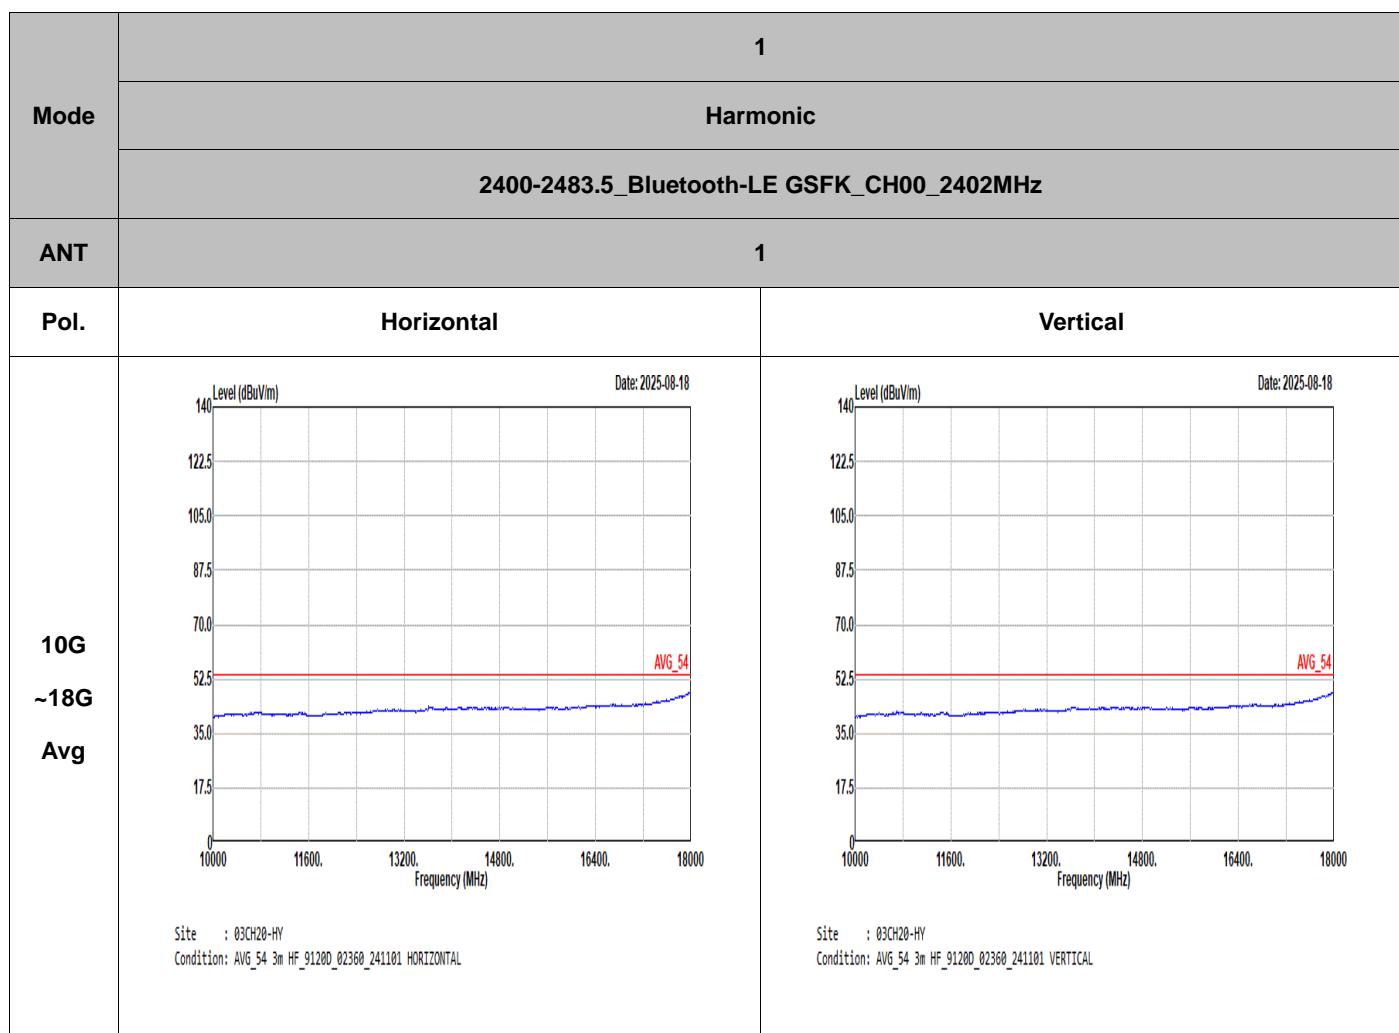

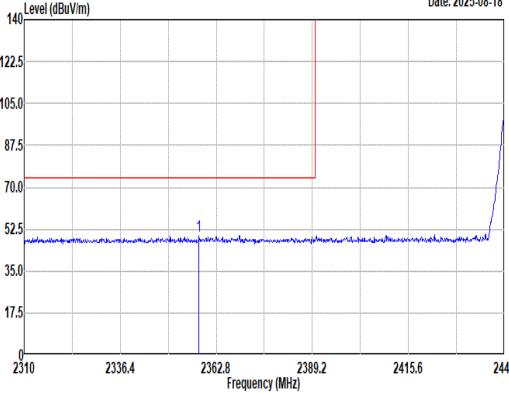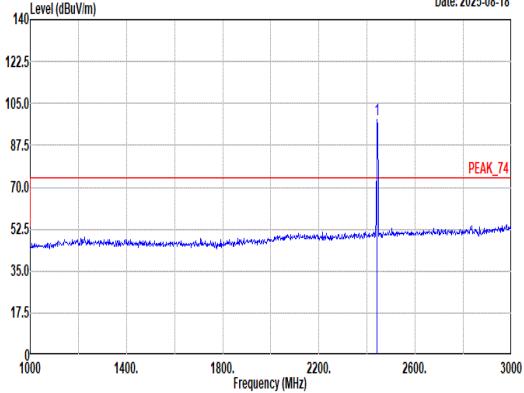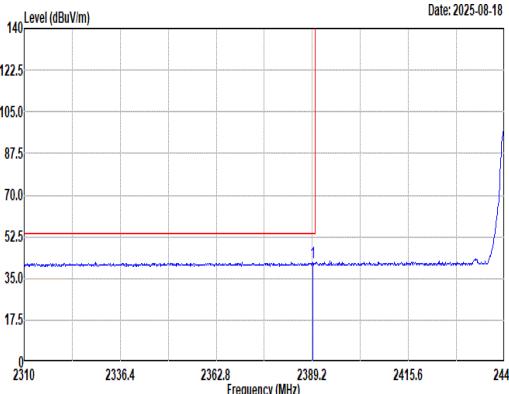
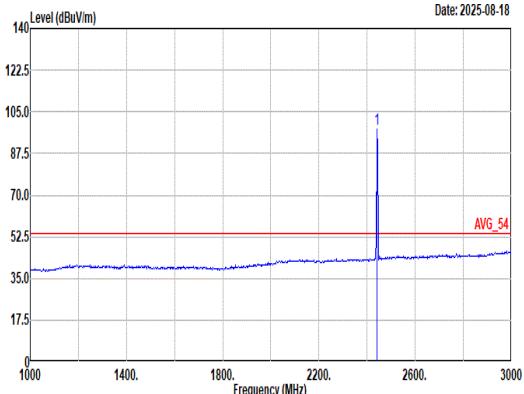
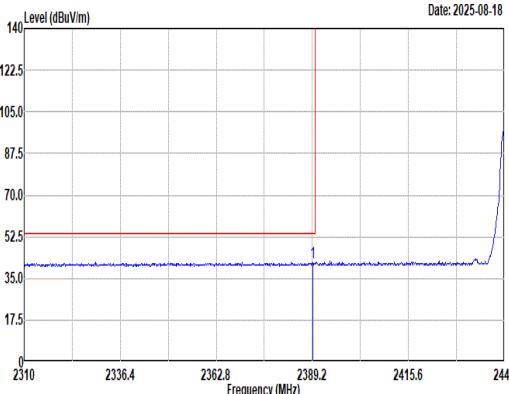
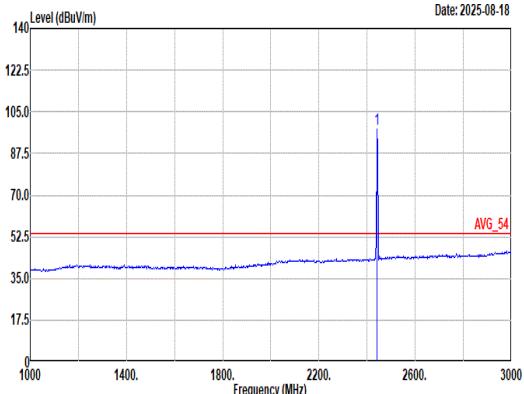


Mode	2																																																																																																					
	Band Edge - L																																																																																																					
	2400-2483.5_Bluetooth-LE GSFK_CH20_2442MHz																																																																																																					
ANT	1																																																																																																					
Pol.	Horizontal	Fundamental																																																																																																				
Peak	 <p>Date: 2025-08-18</p> <p>Site : 03CH20-HY Condition: PEAK_BE_74_3m_HF_91200_02360_241101_HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"><thead><tr><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2358.05</td><td>49.54</td><td>74.00</td><td>-24.46</td><td>48.26</td><td>27.30</td><td>8.56</td><td>36.26</td><td>9.68</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></tbody></table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2358.05	49.54	74.00	-24.46	48.26	27.30	8.56	36.26	9.68																					 <p>Date: 2025-08-18</p> <p>Site : 03CH20-HY Condition: PEAK_74_3m_HF_91200_02360_241101_HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"><thead><tr><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2442.00</td><td>98.11</td><td>-----</td><td>-----</td><td>88.39</td><td>27.60</td><td>8.72</td><td>36.28</td><td>9.68</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></tbody></table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2442.00	98.11	-----	-----	88.39	27.60	8.72	36.28	9.68																				
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	2358.05	49.54	74.00	-24.46	48.26	27.30	8.56	36.26	9.68																																																																																													
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	2442.00	98.11	-----	-----	88.39	27.60	8.72	36.28	9.68																																																																																													
 <p>Date: 2025-08-18</p> <p>Site : 03CH20-HY Condition: AVG_BE_54_3m_HF_91200_02360_241101_HORIZONTAL : RBW:1000.000kHz VBW:11.000kHz SWT:Auto</p> <table border="1"><thead><tr><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.33</td><td>41.73</td><td>54.00</td><td>-12.27</td><td>32.31</td><td>27.39</td><td>8.62</td><td>36.27</td><td>9.68</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></tbody></table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.33	41.73	54.00	-12.27	32.31	27.39	8.62	36.27	9.68																					 <p>Date: 2025-08-18</p> <p>Site : 03CH20-HY Condition: AVG_54_3m_HF_91200_02360_241101_HORIZONTAL : RBW:1000.000kHz VBW:11.000kHz SWT:Auto</p> <table border="1"><thead><tr><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2442.00</td><td>97.60</td><td>-----</td><td>-----</td><td>87.88</td><td>27.60</td><td>8.72</td><td>36.28</td><td>9.68</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></tbody></table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2442.00	97.60	-----	-----	87.88	27.60	8.72	36.28	9.68																					
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	2389.33	41.73	54.00	-12.27	32.31	27.39	8.62	36.27	9.68																																																																																													
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	2442.00	97.60	-----	-----	87.88	27.60	8.72	36.28	9.68																																																																																													
Avg	 <p>Date: 2025-08-18</p> <p>Site : 03CH20-HY Condition: AVG_BE_54_3m_HF_91200_02360_241101_HORIZONTAL : RBW:1000.000kHz VBW:11.000kHz SWT:Auto</p> <table border="1"><thead><tr><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.33</td><td>41.73</td><td>54.00</td><td>-12.27</td><td>32.31</td><td>27.39</td><td>8.62</td><td>36.27</td><td>9.68</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></tbody></table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.33	41.73	54.00	-12.27	32.31	27.39	8.62	36.27	9.68																					 <p>Date: 2025-08-18</p> <p>Site : 03CH20-HY Condition: AVG_54_3m_HF_91200_02360_241101_HORIZONTAL : RBW:1000.000kHz VBW:11.000kHz SWT:Auto</p> <table border="1"><thead><tr><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2442.00</td><td>97.60</td><td>-----</td><td>-----</td><td>87.88</td><td>27.60</td><td>8.72</td><td>36.28</td><td>9.68</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></tbody></table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2442.00	97.60	-----	-----	87.88	27.60	8.72	36.28	9.68																				
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	2389.33	41.73	54.00	-12.27	32.31	27.39	8.62	36.27	9.68																																																																																													
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	2442.00	97.60	-----	-----	87.88	27.60	8.72	36.28	9.68																																																																																													




Mode	2																																									
	Band Edge - R																																									
	2400-2483.5_Bluetooth-LE GSFK_CH20_2442MHz																																									
ANT	1																																									
Pol.	Horizontal	Fundamental																																								
Peak	<p>Level (dBuV/m)</p> <p>Date: 2025-08-18</p> <p>Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VSW:3000.000kHz SWT:Auto</p> <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1</td><td>2490.02</td><td>50.35</td><td>74.00</td><td>-23.65</td><td>48.16</td><td>28.00</td><td>8.81</td><td>36.30</td><td>9.68 272 11 Peak</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	2490.02	50.35	74.00	-23.65	48.16	28.00	8.81	36.30	9.68 272 11 Peak	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																	
1	2490.02	50.35	74.00	-23.65	48.16	28.00	8.81	36.30	9.68 272 11 Peak																																	
Avg	<p>Level (dBuV/m)</p> <p>Date: 2025-08-18</p> <p>Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VSW:11.000kHz SWT:Auto</p> <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1</td><td>2495.42</td><td>42.57</td><td>54.00</td><td>-11.43</td><td>32.37</td><td>28.00</td><td>8.82</td><td>36.30</td><td>9.68 272 11 Average</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	2495.42	42.57	54.00	-11.43	32.37	28.00	8.82	36.30	9.68 272 11 Average	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																	
1	2495.42	42.57	54.00	-11.43	32.37	28.00	8.82	36.30	9.68 272 11 Average																																	

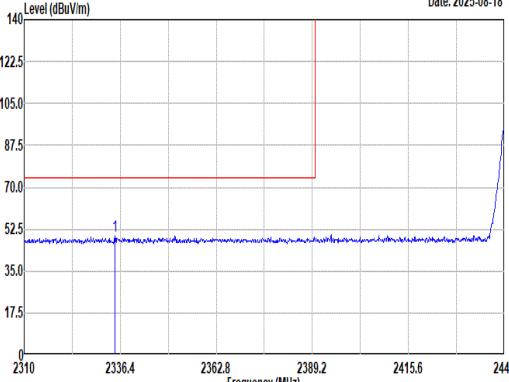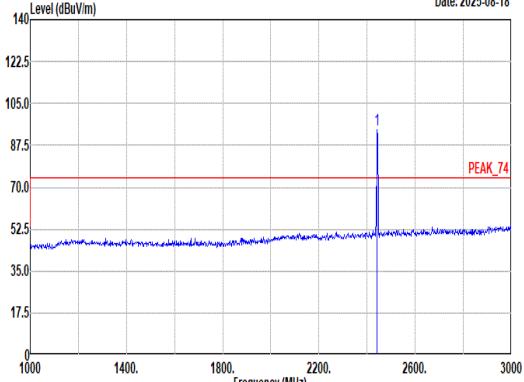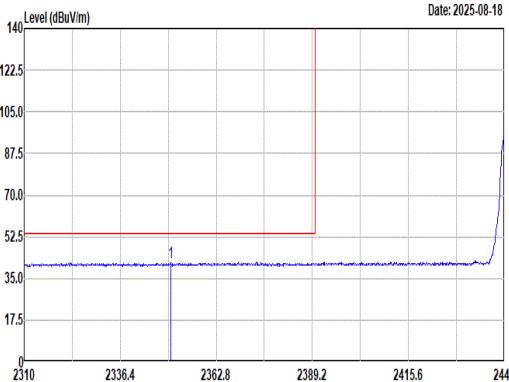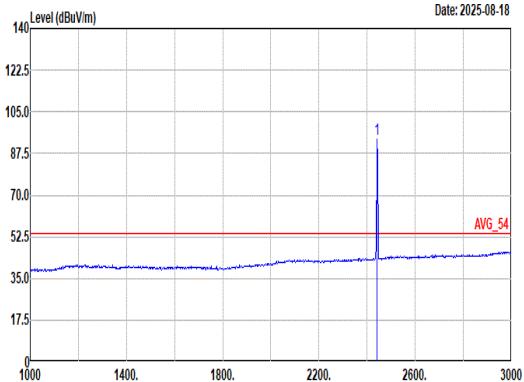


Mode	2																																																																																																					
	Band Edge - L																																																																																																					
	2400-2483.5_Bluetooth-LE GSFK_CH20_2442MHz																																																																																																					
ANT	1																																																																																																					
Pol.	Vertical	Fundamental																																																																																																				
Peak	 <p>Date: 2025-08-18</p> <p>Site : 03CH20-HY Condition: PEAK_BE_74_3m_HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"><thead><tr><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2334.95</td><td>49.77</td><td>74.00</td><td>-24.23</td><td>48.57</td><td>27.25</td><td>8.52</td><td>36.25</td><td>9.68</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>400</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>191 Peak</td></tr></tbody></table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2334.95	49.77	74.00	-24.23	48.57	27.25	8.52	36.25	9.68										400										191 Peak	 <p>Date: 2025-08-18</p> <p>Site : 03CH20-HY Condition: PEAK_74_3m_HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"><thead><tr><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2442.00</td><td>94.21</td><td>-----</td><td>-----</td><td>84.49</td><td>27.60</td><td>8.72</td><td>36.28</td><td>9.68</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>400</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>191 Peak</td></tr></tbody></table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2442.00	94.21	-----	-----	84.49	27.60	8.72	36.28	9.68										400										191 Peak
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	2334.95	49.77	74.00	-24.23	48.57	27.25	8.52	36.25	9.68																																																																																													
									400																																																																																													
									191 Peak																																																																																													
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	2442.00	94.21	-----	-----	84.49	27.60	8.72	36.28	9.68																																																																																													
									400																																																																																													
									191 Peak																																																																																													
 <p>Date: 2025-08-18</p> <p>Site : 03CH20-HY Condition: AVG_BE_54_3m_HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:11.000kHz SWT:Auto</p> <table border="1"><thead><tr><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2350.26</td><td>41.72</td><td>54.00</td><td>-12.28</td><td>32.45</td><td>27.30</td><td>8.55</td><td>36.26</td><td>9.68</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>400</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>191 Average</td></tr></tbody></table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2350.26	41.72	54.00	-12.28	32.45	27.30	8.55	36.26	9.68										400										191 Average	 <p>Date: 2025-08-18</p> <p>Site : 03CH20-HY Condition: AVG_54_3m_HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:11.000kHz SWT:Auto</p> <table border="1"><thead><tr><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2442.00</td><td>93.73</td><td>-----</td><td>-----</td><td>84.01</td><td>27.60</td><td>8.72</td><td>36.28</td><td>9.68</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>400</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>191 Average</td></tr></tbody></table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2442.00	93.73	-----	-----	84.01	27.60	8.72	36.28	9.68										400										191 Average	
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	2350.26	41.72	54.00	-12.28	32.45	27.30	8.55	36.26	9.68																																																																																													
									400																																																																																													
									191 Average																																																																																													
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	2442.00	93.73	-----	-----	84.01	27.60	8.72	36.28	9.68																																																																																													
									400																																																																																													
									191 Average																																																																																													







Mode	2																																																			
	Band Edge - R																																																			
	2400-2483.5_Bluetooth-LE GSFK_CH20_2442MHz																																																			
ANT	1																																																			
Pol.	Vertical	Fundamental																																																		
Peak	<p>Level (dBuV/m)</p> <p>Date: 2025-08-18</p> <p>Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2490.26</td><td>50.25</td><td>74.00</td><td>-23.75</td><td>48.06</td><td>28.00</td><td>8.81</td><td>36.30</td><td>9.68</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>400</td><td>191 Peak</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2490.26	50.25	74.00	-23.75	48.06	28.00	8.81	36.30	9.68									400	191 Peak	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																											
1	2490.26	50.25	74.00	-23.75	48.06	28.00	8.81	36.30	9.68																																											
								400	191 Peak																																											
Avg	<p>Level (dBuV/m)</p> <p>Date: 2025-08-18</p> <p>Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:11.000kHz SWT:Auto</p> <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2496.98</td><td>42.67</td><td>54.00</td><td>-11.33</td><td>32.47</td><td>28.00</td><td>8.82</td><td>36.30</td><td>9.68</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>400</td><td>191 Average</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2496.98	42.67	54.00	-11.33	32.47	28.00	8.82	36.30	9.68									400	191 Average	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																											
1	2496.98	42.67	54.00	-11.33	32.47	28.00	8.82	36.30	9.68																																											
								400	191 Average																																											




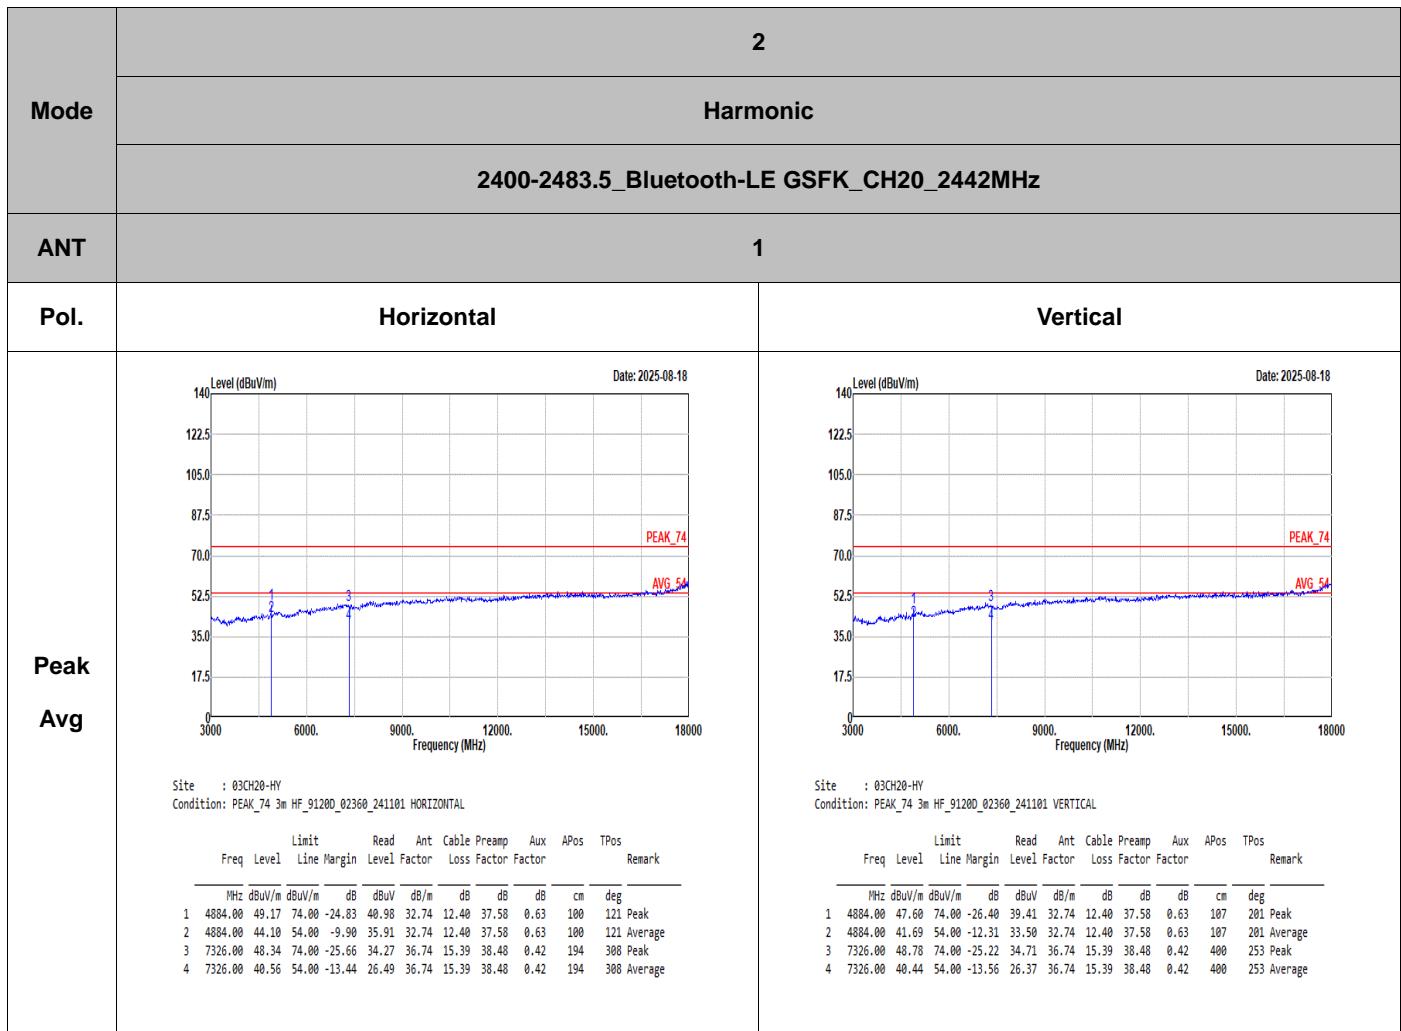


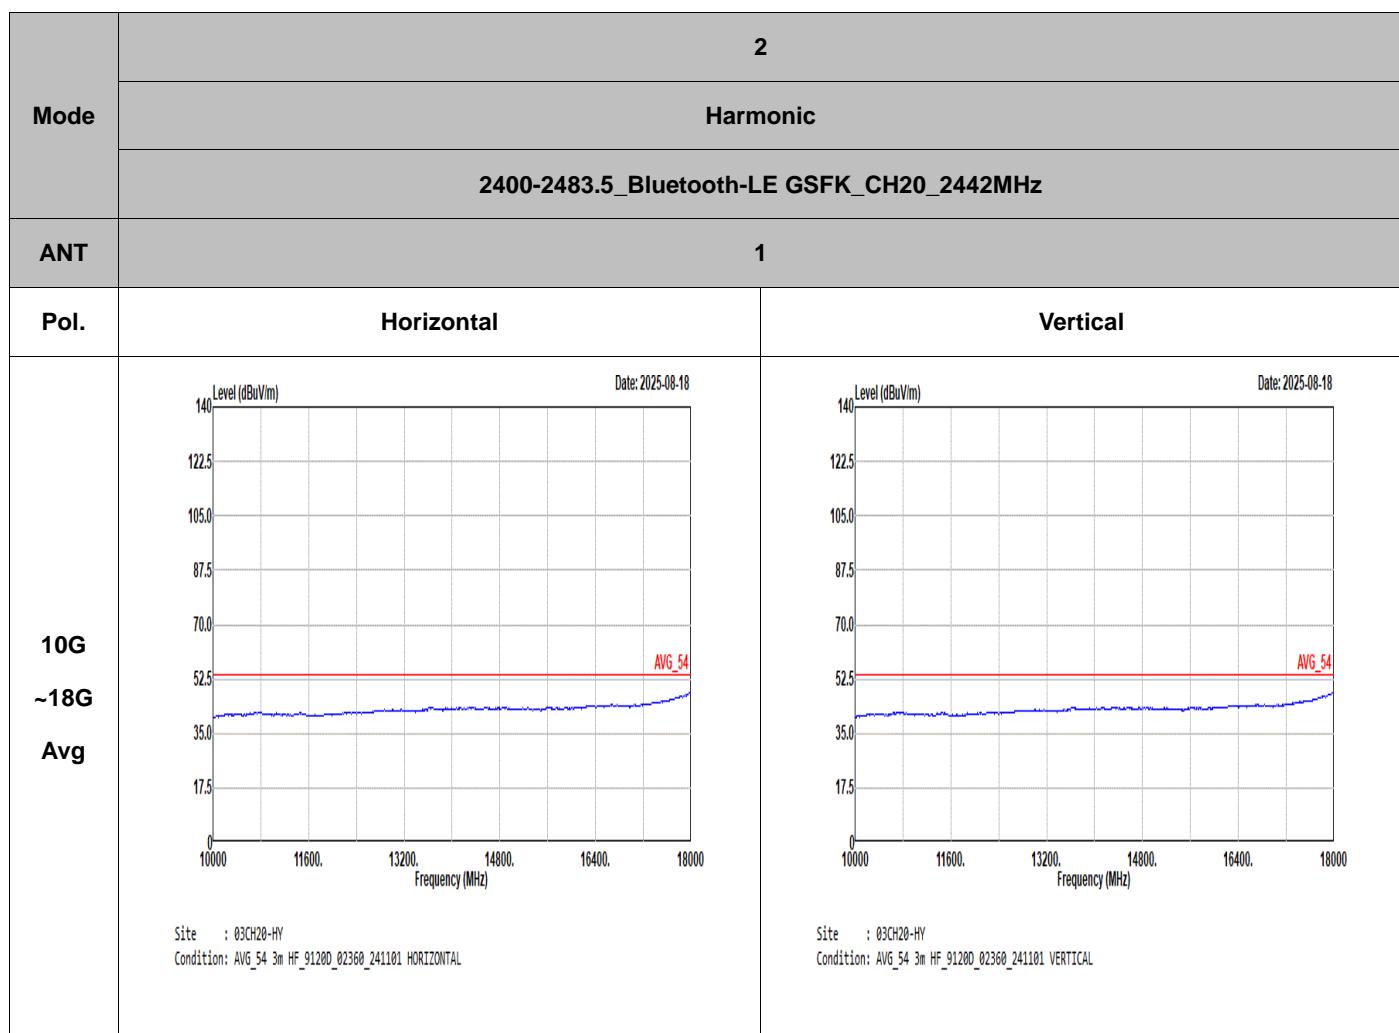

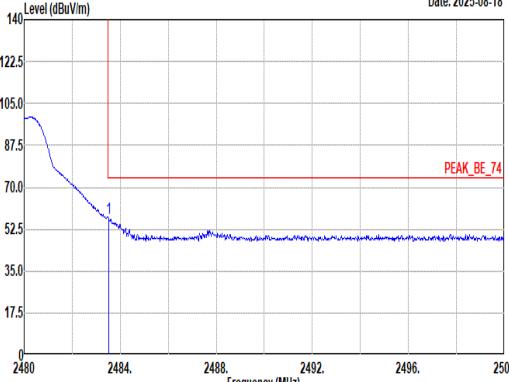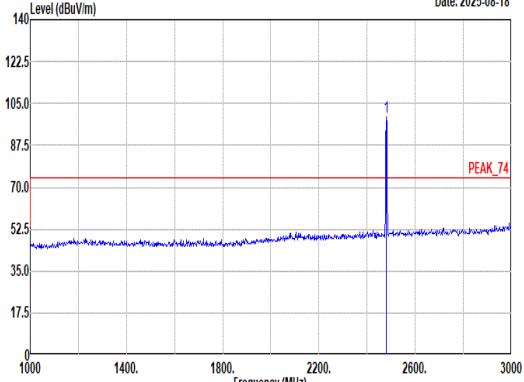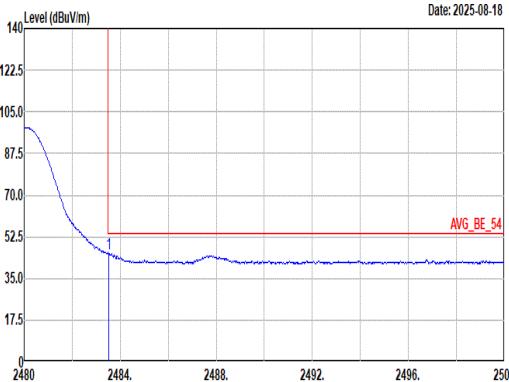
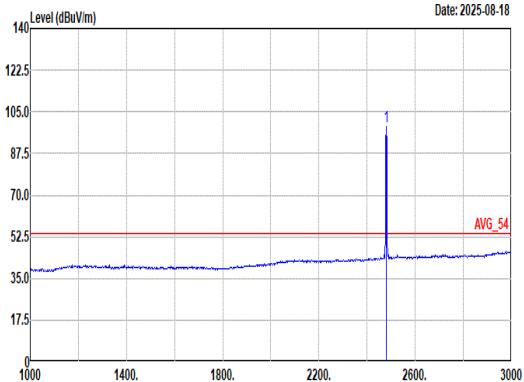



Mode	3																																																																																																					
	Band Edge																																																																																																					
	2400-2483.5_Bluetooth-LE GSFK_CH39_2480MHz																																																																																																					
ANT	1																																																																																																					
Pol.	Horizontal	Fundamental																																																																																																				
Peak	 <p>Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"><thead><tr><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.52</td><td>57.01</td><td>74.00</td><td>-16.99</td><td>46.90</td><td>27.94</td><td>8.79</td><td>36.30</td><td>9.68</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>296</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>11 Peak</td></tr></tbody></table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.52	57.01	74.00	-16.99	46.90	27.94	8.79	36.30	9.68										296										11 Peak	 <p>Site : 03CH20-HY Condition: PEAK_74 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"><thead><tr><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>99.44</td><td>-----</td><td>-----</td><td>89.36</td><td>27.90</td><td>8.79</td><td>36.29</td><td>9.68</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>296</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>11 Peak</td></tr></tbody></table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	99.44	-----	-----	89.36	27.90	8.79	36.29	9.68										296										11 Peak
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	2483.52	57.01	74.00	-16.99	46.90	27.94	8.79	36.30	9.68																																																																																													
									296																																																																																													
									11 Peak																																																																																													
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	2480.00	99.44	-----	-----	89.36	27.90	8.79	36.29	9.68																																																																																													
									296																																																																																													
									11 Peak																																																																																													
 <p>Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:11.000kHz SWT:Auto</p> <table border="1"><thead><tr><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.52</td><td>45.58</td><td>54.00</td><td>-8.42</td><td>35.47</td><td>27.94</td><td>8.79</td><td>36.30</td><td>9.68</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>296</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>11 Average</td></tr></tbody></table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.52	45.58	54.00	-8.42	35.47	27.94	8.79	36.30	9.68										296										11 Average	 <p>Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:11.000kHz SWT:Auto</p> <table border="1"><thead><tr><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>98.93</td><td>-----</td><td>-----</td><td>88.85</td><td>27.90</td><td>8.79</td><td>36.29</td><td>9.68</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>296</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>11 Average</td></tr></tbody></table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	98.93	-----	-----	88.85	27.90	8.79	36.29	9.68										296										11 Average	
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	2483.52	45.58	54.00	-8.42	35.47	27.94	8.79	36.30	9.68																																																																																													
									296																																																																																													
									11 Average																																																																																													
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	2480.00	98.93	-----	-----	88.85	27.90	8.79	36.29	9.68																																																																																													
									296																																																																																													
									11 Average																																																																																													
Page Number : C13 of C18																																																																																																						

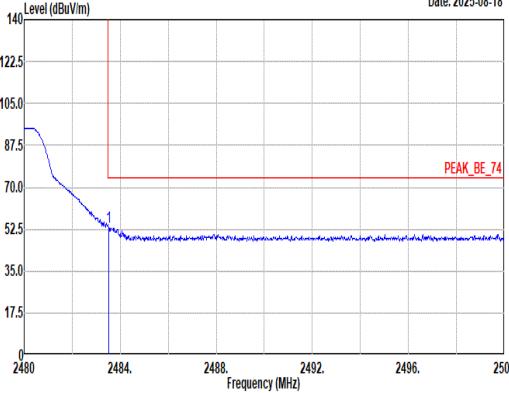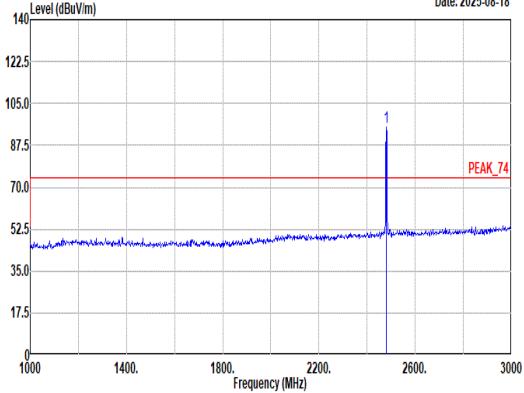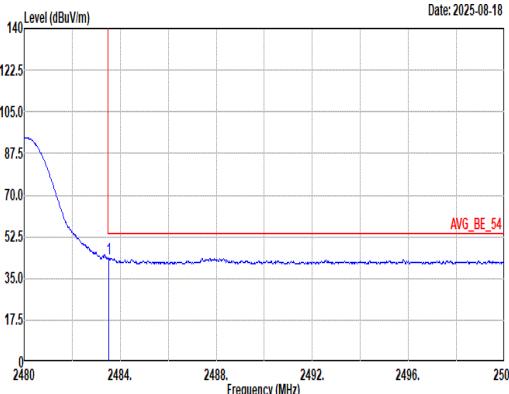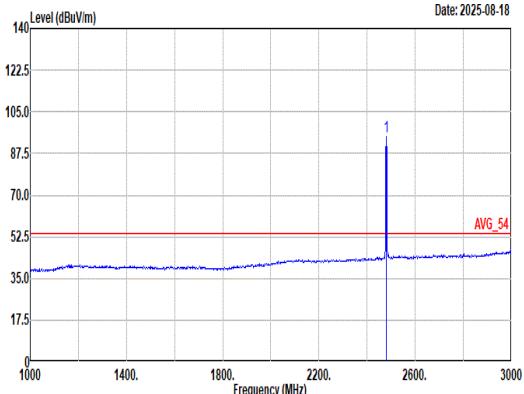


Mode	3																																																																																	
	Band Edge																																																																																	
	2400-2483.5_Bluetooth-LE GSFK_CH39_2480MHz																																																																																	
ANT	1																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	 <p>Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"><thead><tr><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.52</td><td>53.61</td><td>74.00</td><td>-20.39</td><td>43.50</td><td>27.94</td><td>8.79</td><td>36.30</td><td>9.68</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>382 213 Peak</td></tr></tbody></table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.52	53.61	74.00	-20.39	43.50	27.94	8.79	36.30	9.68										382 213 Peak	 <p>Site : 03CH20-HY Condition: PEAK_74 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"><thead><tr><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>94.95</td><td>-----</td><td>-----</td><td>84.87</td><td>27.90</td><td>8.79</td><td>36.29</td><td>9.68</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>382 213 Peak</td></tr></tbody></table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	94.95	-----	-----	84.87	27.90	8.79	36.29	9.68										382 213 Peak
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2483.52	53.61	74.00	-20.39	43.50	27.94	8.79	36.30	9.68																																																																									
									382 213 Peak																																																																									
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2480.00	94.95	-----	-----	84.87	27.90	8.79	36.29	9.68																																																																									
									382 213 Peak																																																																									
 <p>Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:11.000kHz SWT:Auto</p> <table border="1"><thead><tr><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.52</td><td>43.37</td><td>54.00</td><td>-10.63</td><td>33.26</td><td>27.94</td><td>8.79</td><td>36.30</td><td>9.68</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>382 213 Average</td></tr></tbody></table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.52	43.37	54.00	-10.63	33.26	27.94	8.79	36.30	9.68										382 213 Average	 <p>Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:11.000kHz SWT:Auto</p> <table border="1"><thead><tr><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>94.45</td><td>-----</td><td>-----</td><td>84.37</td><td>27.90</td><td>8.79</td><td>36.29</td><td>9.68</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>382 213 Average</td></tr></tbody></table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	94.45	-----	-----	84.37	27.90	8.79	36.29	9.68										382 213 Average	
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2483.52	43.37	54.00	-10.63	33.26	27.94	8.79	36.30	9.68																																																																									
									382 213 Average																																																																									
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2480.00	94.45	-----	-----	84.37	27.90	8.79	36.29	9.68																																																																									
									382 213 Average																																																																									

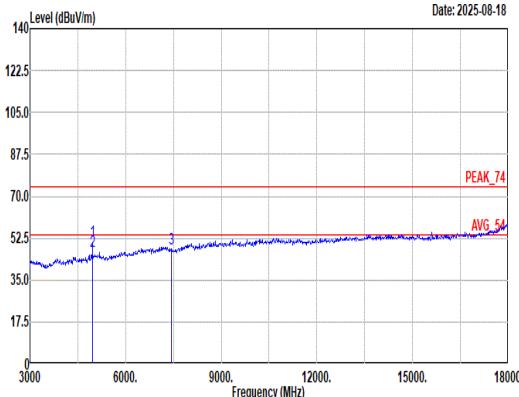
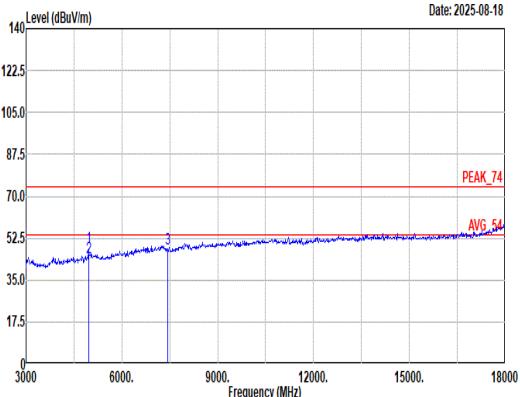


Mode	3																																																								
	Harmonic																																																								
	2400-2483.5_Bluetooth-LE GSFK_CH39_2480MHz																																																								
ANT	1																																																								
Pol.	Horizontal																																																								
Peak	 Date: 2025-08-18 Level (dBuV/m) vs Frequency (MHz) from 3000 to 18000. The plot shows a blue line representing the measured signal. Three vertical markers are labeled: 1 (at ~4960MHz), 2 (at ~4960MHz), and 3 (at ~7440MHz). A red horizontal line at 74.00 dBuV/m is labeled 'PEAK_74'. A blue line at 54.00 dBuV/m is labeled 'AVG_54'. The plot shows a slight upward trend from 3000MHz to 18000MHz. Site : 03CH20-HY Condition: PEAK_74 3m HF_91200_02360_241101 HORIZONTAL	 Date: 2025-08-18 Level (dBuV/m) vs Frequency (MHz) from 3000 to 18000. The plot shows a blue line representing the measured signal. Three vertical markers are labeled: 1 (at ~4960MHz), 2 (at ~4960MHz), and 3 (at ~7440MHz). A red horizontal line at 74.00 dBuV/m is labeled 'PEAK_74'. A blue line at 54.00 dBuV/m is labeled 'AVG_54'. The plot shows a slight upward trend from 3000MHz to 18000MHz. Site : 03CH20-HY Condition: PEAK_74 3m HF_91200_02360_241101 VERTICAL																																																							
	<table border="1"><thead><tr><th rowspan="2">Freq</th><th rowspan="2">Level</th><th colspan="2">Limit</th><th colspan="2">Read</th><th rowspan="2">Ant</th><th rowspan="2">Cable</th><th rowspan="2">Preamp</th><th rowspan="2">Aux</th><th rowspan="2">APos</th><th rowspan="2">TPos</th><th rowspan="2">Remark</th></tr><tr><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th></tr></thead><tbody><tr><td>1</td><td>4960.00</td><td>51.24</td><td>74.00</td><td>-22.76</td><td>42.56</td><td>33.16</td><td>12.54</td><td>37.64</td><td>0.62</td><td>105</td><td>119</td><td>Peak</td></tr><tr><td>2</td><td>4960.00</td><td>47.05</td><td>54.00</td><td>-6.95</td><td>38.37</td><td>33.16</td><td>12.54</td><td>37.64</td><td>0.62</td><td>105</td><td>119</td><td>Average</td></tr><tr><td>3</td><td>7440.00</td><td>47.87</td><td>74.00</td><td>-26.13</td><td>34.31</td><td>36.22</td><td>15.51</td><td>38.58</td><td>0.41</td><td>--</td><td>--</td><td>Peak</td></tr></tbody></table>		Freq	Level	Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark	Line	Margin	Level	Factor	1	4960.00	51.24	74.00	-22.76	42.56	33.16	12.54	37.64	0.62	105	119	Peak	2	4960.00	47.05	54.00	-6.95	38.37	33.16	12.54	37.64	0.62	105	119	Average	3	7440.00	47.87	74.00	-26.13	34.31	36.22	15.51	38.58	0.41	--	--
Freq	Level	Limit			Read		Ant	Cable								Preamp	Aux	APos	TPos	Remark																																					
		Line	Margin	Level	Factor																																																				
1	4960.00	51.24	74.00	-22.76	42.56	33.16	12.54	37.64	0.62	105	119	Peak																																													
2	4960.00	47.05	54.00	-6.95	38.37	33.16	12.54	37.64	0.62	105	119	Average																																													
3	7440.00	47.87	74.00	-26.13	34.31	36.22	15.51	38.58	0.41	--	--	Peak																																													

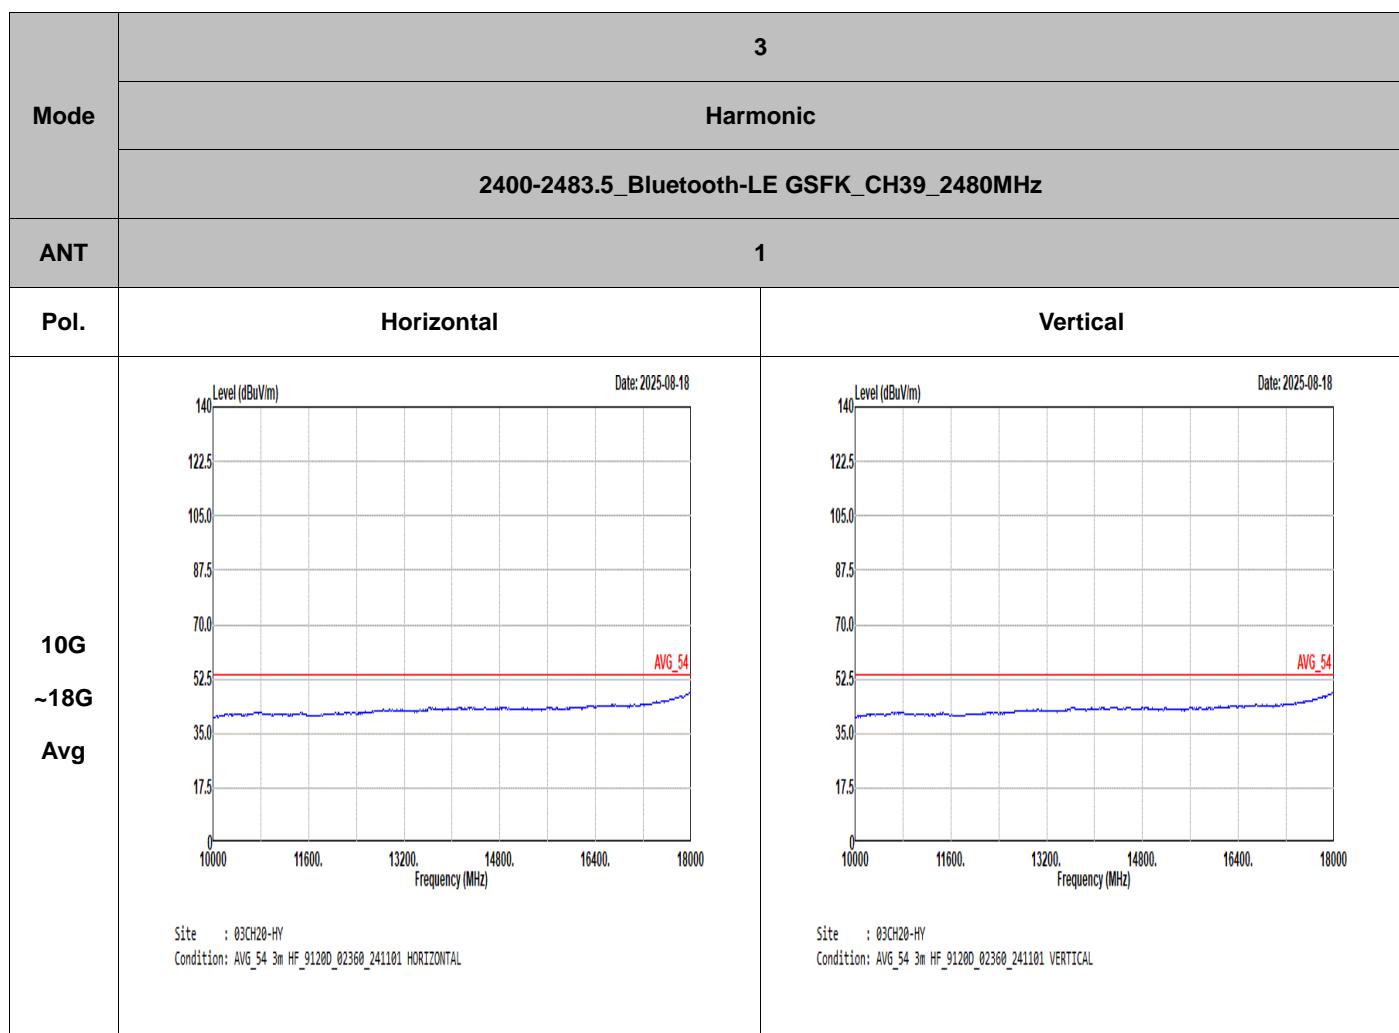

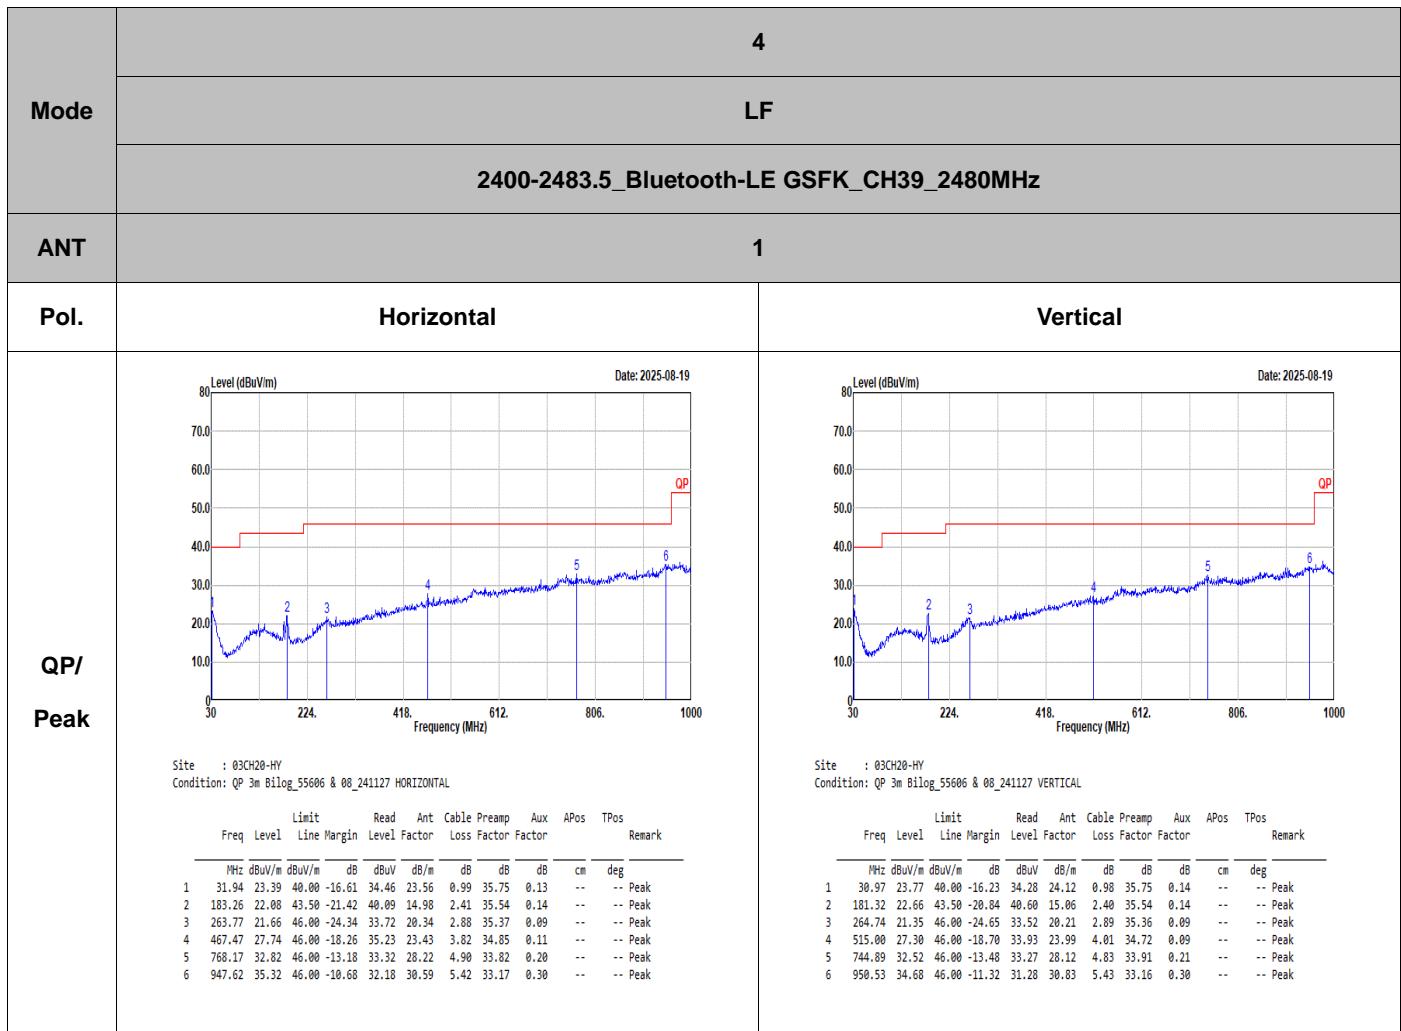

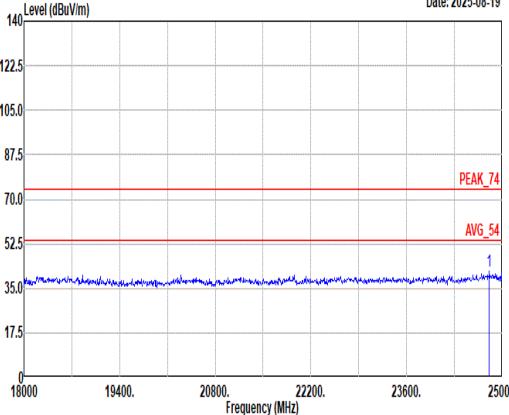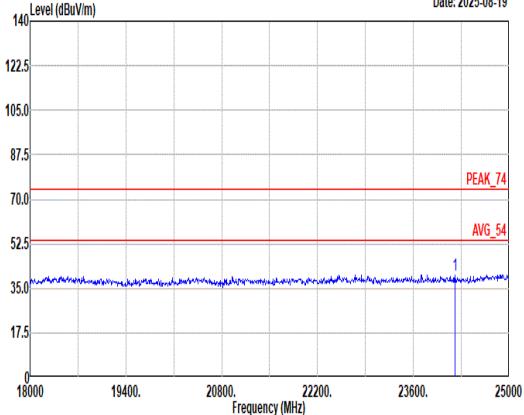

Mode	5																																																																																																					
	SHF																																																																																																					
	2400-2483.5_Bluetooth-LE GSFK_CH39_2480MHz																																																																																																					
ANT	1																																																																																																					
Pol.	Horizontal																																																																																																					
Peak	 <p>Site : 03CH20-HY Condition: PEAK_74 1m B8HA9170_1223_250702 HORIZONTAL</p> <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr></thead><tbody><tr><td>1</td><td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dB</td><td>dB</td><td>dB</td><td>cm</td><td>deg</td></tr><tr><td>1</td><td>24811.00</td><td>41.57</td><td>74.00</td><td>-32.43</td><td>42.75</td><td>39.60</td><td>28.98</td><td>60.22</td><td>-9.54</td></tr><tr><td></td><td></td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>-- Peak</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor		1	MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	cm	deg	1	24811.00	41.57	74.00	-32.43	42.75	39.60	28.98	60.22	-9.54			--	--	--	--	--	--	--	-- Peak	 <p>Site : 03CH20-HY Condition: PEAK_74 1m B8HA9170_1223_250702 VERTICAL</p> <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr></thead><tbody><tr><td>1</td><td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dB</td><td>dB</td><td>dB</td><td>cm</td><td>deg</td></tr><tr><td>1</td><td>24209.00</td><td>40.35</td><td>74.00</td><td>-33.65</td><td>42.30</td><td>39.04</td><td>28.71</td><td>60.16</td><td>-9.54</td></tr><tr><td></td><td></td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>-- Peak</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor		1	MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	cm	deg	1	24209.00	40.35	74.00	-33.65	42.30	39.04	28.71	60.16	-9.54			--	--	--	--	--	--	--	-- Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																													
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor																																																																																														
1	MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	cm	deg																																																																																													
1	24811.00	41.57	74.00	-32.43	42.75	39.60	28.98	60.22	-9.54																																																																																													
		--	--	--	--	--	--	--	-- Peak																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																													
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor																																																																																														
1	MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	cm	deg																																																																																													
1	24209.00	40.35	74.00	-33.65	42.30	39.04	28.71	60.16	-9.54																																																																																													
		--	--	--	--	--	--	--	-- Peak																																																																																													



Appendix D. Duty Cycle Plots

Band	Duty Cycle (%)	T(us)	1/T(kHz)	VBW Setting
Bluetooth - LE for 1Mbps	15.20	93	10.75	11kHz

