

TEST REPORT

Report number: Z071C-09142

Issue Date: August 6, 2009

The device, as described herewith, was tested pursuant to applicable test procedure indicated below and complies with the requirements of;

FCC Part15 Subpart C / IC RSS-210

The test results are traceable to the international or national standards.

Applicant	: Topcon Corporation
Equipment under test (EUT)	: WLAN UNIT
FCC ID	: H5P-WLAN528
IC Certification Number	: 6050A-WLAN528
Model Number	: WLAN528
Serial Number	: N/A
EUT Condition	: Pre-production

Test procedure	: ANSI C63.4-2003
Date of test	: July 7, 8, 16, 22, 24 2009
Test place	: 3m Semi-anechoic chamber, Shielded room
Test results	: Complied


Zacta Technology Corporation certifies that no party to the application is subject to a denial of federal benefits that include FCC benefits, pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 853(a).

The results in this report are applicable only to the samples tested.

This report shall not be re-produced except in full without the written approval of ZACTA Technology Corporation.

This test report must not be used by client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.

Tested by:

 
Hiroaki Suzuki Taiki Watanabe

Authorized by:


Jun Shimanuki
General Manager of Technical Division



Table of contents

	Page
1. Summary of Test.....	4
1.1 Purpose of test.....	4
1.2 Standards.....	4
1.3 Summary of test results	4
1.4 Deviation from the standard.....	4
1.5 Modification to the EUT by laboratory	4
2. Equipment description.....	5
2.1 General Description of equipment.....	5
2.2 EUT information.....	5
2.3 Operating channels and frequencies	6
2.4 Operating mode	6
3. Configuration information.....	7
3.1 EUT and Peripheral(s) used	7
3.2 Cable(s) information.....	7
3.3 System configuration.....	8
4. Test Type and Results	9
4.1 6dB Bandwidth / Occupied Bandwidth.....	9
4.1.1 Test Procedure [FCC 15.247(a)(2), IC RSS-210 A8.2(a)].....	9
4.1.2 Measurement Setup	9
4.1.3 Limit of Bandwidth at 6 dB below.....	9
4.1.4 Measurement Result.....	9
4.1.5 Trace Data.....	9
4.2 Maximum Peak Output Power - Conducted -	12
4.2.1 Test Procedure [FCC 15.247(b)(1), 15.31(e), IC RSS-210 A8.4(2)].....	12
4.2.2 Test Instruments and Measurement Setup	12
4.2.3 Limit of Maximum Peak Output Power	12
4.2.4 Measurement Result.....	12
4.2.5 Trace Data.....	13
4.3 Band Edge Compliance of RF Conducted Emissions	16
4.3.1 Test Procedure [FCC 15.247 (d), IC RSS-210 A8.5].....	16
4.3.2 Test Instruments and Measurement Setup	16
4.3.3 Limit of Band-edge Compliance of RF Conducted Emissions	16
4.3.4 Measurement Results of Band-edge	16
4.3.5 Trace Data.....	16
4.4 Spurious Emissions - Conducted -	19
4.4.1 Test Procedure [FCC 15.247(d), IC RSS-210 A8.5, RSS-Gen 4.9&4.10].....	19
4.4.2 Measurement Setup	19
4.4.3 Limit of Spurious Emissions – Conducted –	19

4.4.4 Measurement Results of Spurious Emissions – Conducted –	19
4.4.5 Trace Data	19
4.5 Spurious Emissions - Radiated - (9kHz – 25GHz)	22
4.5.1 Test Procedure [FCC 15.205/209/247(d), IC RSS-210 A8.5, RSS-Gen 4.9&4.10]	22
4.5.2 Measurement Setup	22
4.5.3 Limit of Spurious Emission Measurement	23
4.5.4 Sample of field strength calculation	23
4.5.5 Measurement Results	23
4.6 Restricted Band of Operation	28
4.6.1 Test Procedure [FCC 15.205, 15.209, 15.247(d), IC RSS-210 2.2]	28
4.6.2 Measurement Setup	28
4.6.3 Limit of Restricted Band of Operation	28
4.6.4 Measurement Result	28
4.6.5 Trace Data	29
4.7 Transmitter Power Spectral Density	34
4.7.1 Test Procedure [FCC 15.247(d), IC RSS-210 A8.2(b)]	34
4.7.2 Measurement Setup	34
4.7.3 Limit of Transmitter Power Spectral Density	34
4.7.4 Measurement Results	34
4.7.5 Trace Data	34
4.8 AC power line Conducted Emissions	37
4.8.1 Test Procedure [FCC 15.207, IC RSS-Gen 7.2.2]	37
4.8.2 Measurement Setup	37
4.8.3 Limit of AC power line Conducted Emissions Measurement (Sample calculation)	38
4.8.4 Measurement Result	39
4.9 Antenna requirement	41
5. Uncertainty of measurement	42
6. Laboratory description	43
6.1 Location:	43
6.2 Facility filing information:	43
Appendix A: Test equipment	44

1. Summary of Test

1.1 Purpose of test

It is the original test in order to verify conformance to standards listed in section 1.2.

1.2 Standards

CFR47 FCC Part 15 Subpart C, RSS-210

1.3 Summary of test results

Table-A presents the list of the measurement items for Spread Spectrum, Frequency hopping devices under FCC Part 15 Subpart C and Industry Canada RSS-210 Issue 7.

Table-A: List of the measurements

Test Items Section	Test Items	Condition	Result
	Transmit mode [Tx]:		
15.247(a)(2) RSS-210 A8.2(a)	Occupied Bandwidth (6dB Bandwidth)	Conducted	Pass
RSS-Gen 4.6.1	99% Occupied bandwidth	Conducted	Pass
15.247(b)(1) 15.31(e) RSS-210 A8.4(2)	Maximum Peak Output Power - Conducted -	Conducted	Pass
15.247(d) RSS-210 A8.5	Band Edge Compliance of RF Conducted Emissions	Conducted	Pass
15.247(d) RSS-210 A8.5 RSS-Gen 4.9, 4.10	Spurious Emissions	Conducted Radiated	Pass
15.247(d) 15.205 15.209 RSS-210 2.2	Restricted Bands of Operation	Radiated	Pass
15.247(e) RSS-210 A8.2(b)	Transmitter power spectral density	Conducted	Pass
15.207 RSS-Gen 7.2.2	AC Power Line Conducted Emissions 150kHz – 30MHz	Conducted	Pass

1.4 Deviation from the standard

None

1.5 Modification to the EUT by laboratory

None

2. Equipment description

2.1 General Description of equipment

This device is 802.11b/g Wireless LAN Module, which operates in 2.4GHz ISM band.

2.2 EUT information

Applicant	: Topcon Corporation 75-1, Hasunuma-cho, Itabashi-ku, Tokyo 174-8580 Japan Phone: +81-3-3558-2634 Fax: +81-3-3966-0038
Equipment under test (EUT)	: WLAN UNIT
Trade name	: TOPCON
Model number	: WLAN528
Serial number	: N/A
EUT condition	: Pre-production
Max. frequency	: 16MHz
Power ratings	: DC 3.3V $\pm$ 5% 320mA
Size	: (W) 28 x (D) 13.5 x (H) 3.5 mm
Environment	: Indoor / Outdoor use
Thermal limitation	: -15°C to 55°C
Operating mode	: Tx mode / Rx mode
Variation of the family model(s)	: N/A
[RF Specification]	
Protocol	: IEEE802.11b, IEEE802.11g
Spread method	: DSSS, OFDM
Frequency Range	: 2412MHz – 2462MHz
Number of FR Channels	: 11 Channels
Symbol rate on channel	: 1, 2, 5.5, 11Mbps (IEEE802.11b) 6, 9, 12, 18, 24, 36, 48, 54Mbps (IEEE802.11g) _: Tested rate
Channel Separation	: 5MHz
Output power	: 48.417mW (IEEE802.11b) 52.481mW (IEEE802.11g)
Antenna (Rx and Tx)	: Pattern antenna
Antenna gain	: 2.15dBi
RF type	: Transceiver
Intended use	: Data transmission
RF emission type designator	: 13M6G1D (IEEE802.11b) 16M7G1D (IEEE802.11g)

2.3 Operating channels and frequencies

Channel	Frequency[MHz]
1	2412
2	2417
3	2422
4	2427
5	2432
6	2437
7	2442
8	2447
9	2453
10	2457
11	2462

2.4 Operating mode

【Tx mode】

Test program set up

ii) Select a test mode

Operating frequency: CH.1, 6, 11

Tx speed: 11Mbps (IEEE802.11b), 54Mbps (IEEE802.11g)

Power control: 10dBm

iii) Start test mode

Note: As a result of having performed at all data rates in Maximum Peak Output Power, the worst rate was 11Mbps (IEEE802.11b) and 54Mbps (IEEE802.11g).

【Rx mode】

Test program set up

ii) Select a test mode

Write Receive only

Operating frequency: CH.1, 6, 11

iii) Start test mode

3. Configuration information


3.1 EUT and Peripheral(s) used

No.	Equipment	Company	Model No.	Serial No.	FCC ID/DoC	Comment
1	WLAN UNIT	Topcon Corporation	WLAN528	N/A	H5P-WLAN528	EUT
2	Antenna	HARADA INDUSTRY	W-ANT-250	N/A	-	-
3	TEST-BOARD	NAGANO	N/A	003	-	-
4	Personal Computer	IBM	Type 1866	LV-F4035	DoC	-
5	AC adapter for PC	IBM	02K6810	N/A	-	-

3.2 Cable(s) information

No.	Cable	Length [m]	Shield	Connector	Comment
a	Coaxial cable	0.7	Yes	Metal	-
b	I/O cable	0.8	No	Plastic	-
c	DC cable for PC AC adapter	1.8	No	Metal	-
d	AC Power cord for PC AC adapter	0.9	No	Plastic	-

3.3 System configuration

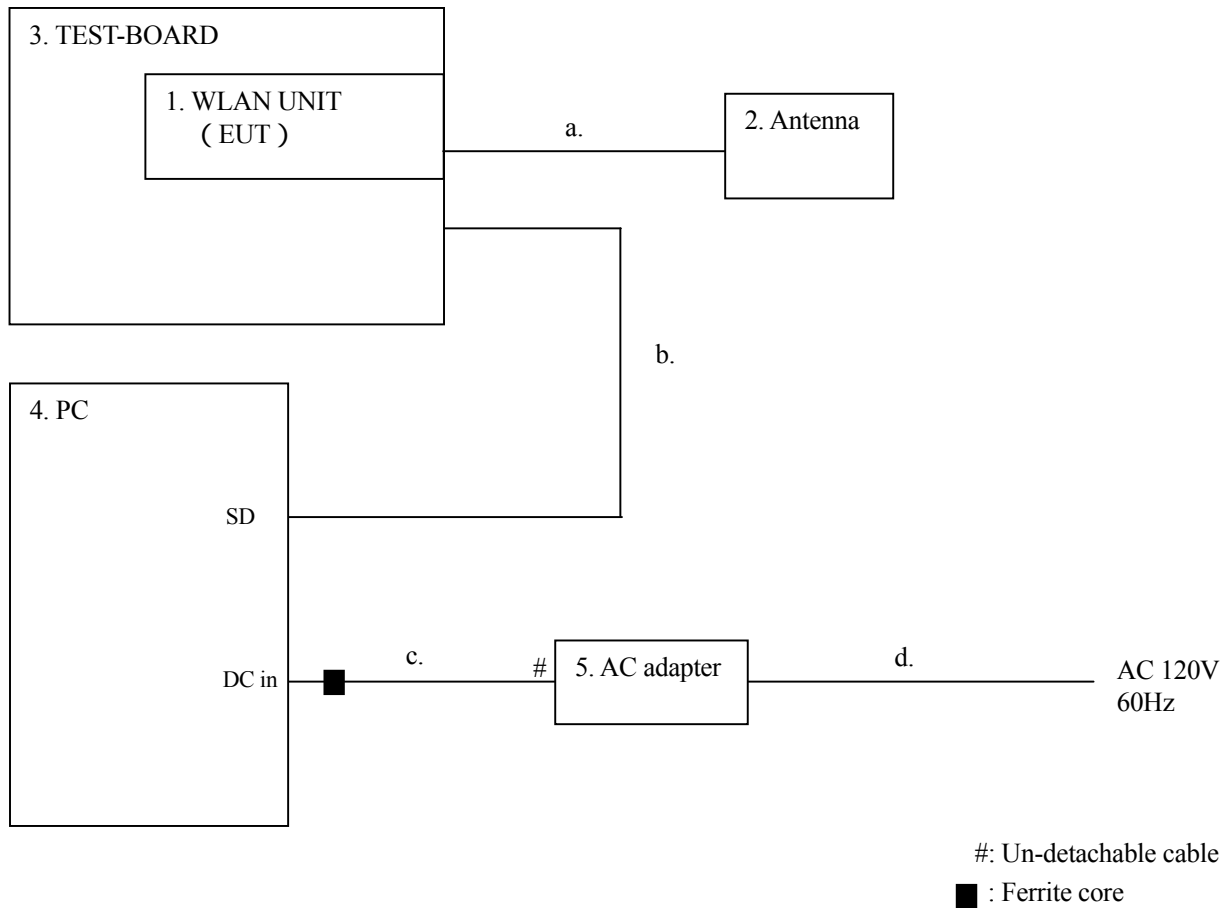

Note: Numbers assigned to equipment or cables on this diagram are corresponded to the list in “3.1 EUT and Peripheral(s) used” and “3.2 Cable(s) information”.

4. Test Type and Results

4.1 6dB Bandwidth / Occupied Bandwidth

4.1.1 Test Procedure [FCC 15.247(a)(2), IC RSS-210 A8.2(a)]

The bandwidth at 6 dB down from the highest inband spectral density is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

The spectrum analyzer is set to:

- RBW=300kHz, VBW=300kHz, Span=30MHz, Sweep=auto


The EUT was set to operate with following conditions.

- ch 1 (low), ch 6 (mid) and ch 11 (high)

The test mode of EUT is as follows.

- Tx mode

4.1.2 Measurement Setup



4.1.3 Limit of Bandwidth at 6 dB below

None

4.1.4 Measurement Result

[IEEE802.11b]

Channel	Center Frequency (MHz)	Occupied Bandwidth (MHz)	6dB Bandwidth (MHz)
1	2412.00	13.5750	10.298
6	2437.00	13.5677	10.297
11	2462.00	13.5527	10.302

[IEEE802.11g]

Channel	Center Frequency (MHz)	Occupied Bandwidth (MHz)	6dB Bandwidth (MHz)
1	2412.00	16.6518	16.608
6	2437.00	16.6477	16.667
11	2462.00	16.6470	16.638

4.1.5 Trace Data


Test Personnel:

Tested by: Taiki Watanabe


Date : July. 16, 2009
Temperature : 26.0 [°C]
Humidity : 70.0 [%]
Test place : Shielded room

6dB Bandwidth/Occupied Bandwidth [IEEE802.11b]


Channel 1: 2412.0MHz

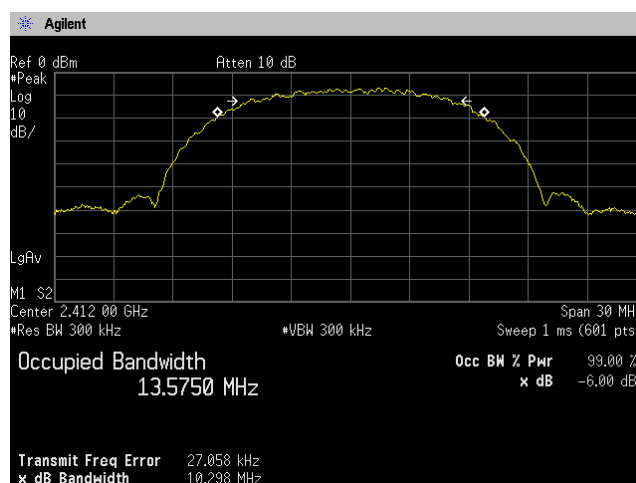

Channel 6: 2437.0MHz

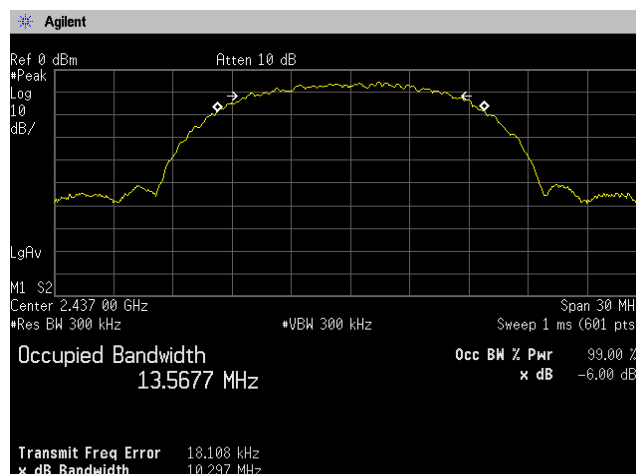


Channel 11: 2462.0MHz

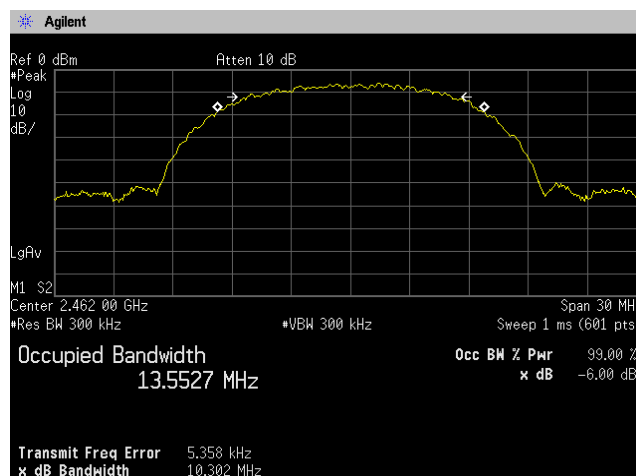


6dB Bandwidth/Occupied Bandwidth [IEEE802.11g]


Channel 1: 2412.0MHz

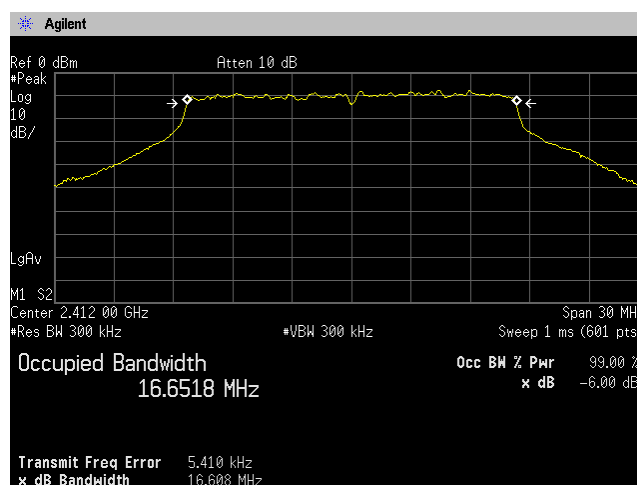

Channel 6: 2437.0MHz

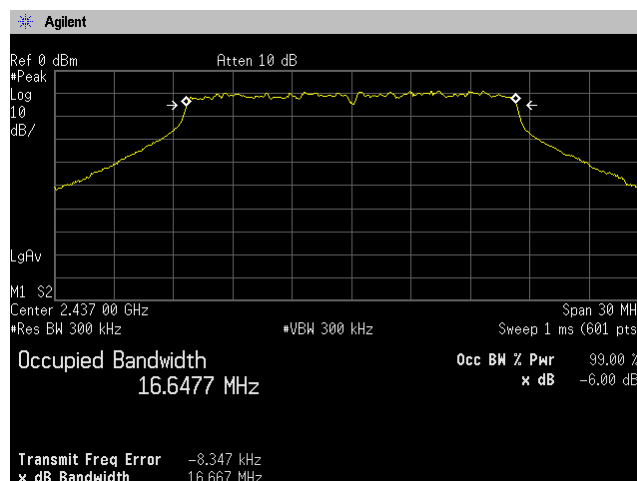

Channel 11: 2462.0MHz

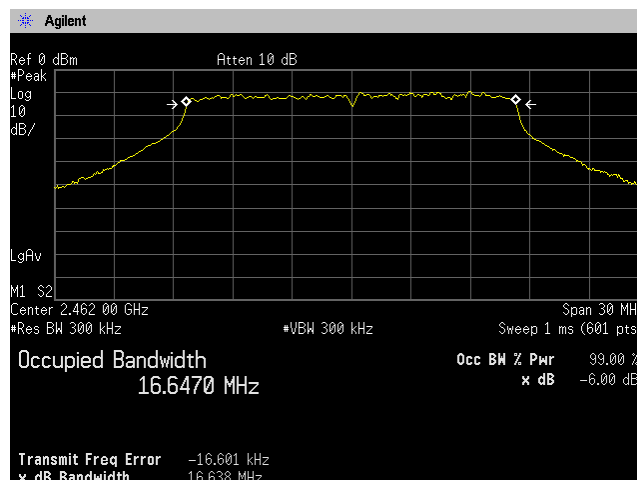

4.2 Maximum Peak Output Power - Conducted -

4.2.1 Test Procedure [FCC 15.247(b)(1), 15.31(e), IC RSS-210 A8.4(2)]

The peak power is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

The spectrum analyzer is set to:

- RBW=1MHz, VBW=3MHz, Span=100MHz, Sweep=auto


The EUT was set to operate with following conditions.

- ch 1 (low), ch 6 (mid) and ch 11 (high)

The test mode of EUT is as follows.

- Tx mode in operation.

4.2.2 Test Instruments and Measurement Setup



4.2.3 Limit of Maximum Peak Output Power

1W (1000mW) or less

4.2.4 Measurement Result

[IEEE802.11b]

Channel	Center Frequency (MHz)	Reading (dBm)	Factor (dB)	Antenna Gain (dBi)	Level (dBm)	Peak Output Power	Limit (mW)	Result
1	2412.00	4.00	10.66	2.15	16.81	47.973	1000	PASS
6	2437.00	4.04	10.66	2.15	16.85	48.417	1000	PASS
11	2462.00	3.45	10.66	2.15	16.26	42.267	1000	PASS

Calculation:

Reading (dBm) + Factor (dB) + Antenna Gain of EUT (dBi) = Level (dBm)

$10\log P = \text{Level (dBm)}$

$P = 10^{(\text{Maximum Peak Output Power (dBm)} / 10)} (\text{mW})$

[IEEE802.11g]

Channel	Center Frequency (MHz)	Reading (dBm)	Factor (dB)	Antenna Gain (dBi)	Level (dBm)	Peak Output Power	Limit (mW)	Result
1	2412.00	4.39	10.66	2.15	17.20	52.481	1000	PASS
6	2437.00	4.15	10.66	2.15	16.96	49.659	1000	PASS
11	2462.00	3.47	10.66	2.15	16.28	42.462	1000	PASS

Calculation:

Reading (dBm) + Factor (dB) + Antenna Gain of EUT (dBi) = Level (dBm)

$10\log P = \text{Level (dBm)}$

$P = 10^{(\text{Maximum Peak Output Power (dBm)} / 10)} (\text{mW})$

4.2.5 Trace Data


Test Personnel:

Tested by: Taiki Watanabe


Date : July. 8, 2009
Temperature : 24.0 [°C]
Humidity : 74.0 [%]
Test place : Shielded room

Maximum Peak Output Power - Conducted - [IEEE802.11b]


Channel 1: 2412.0MHz

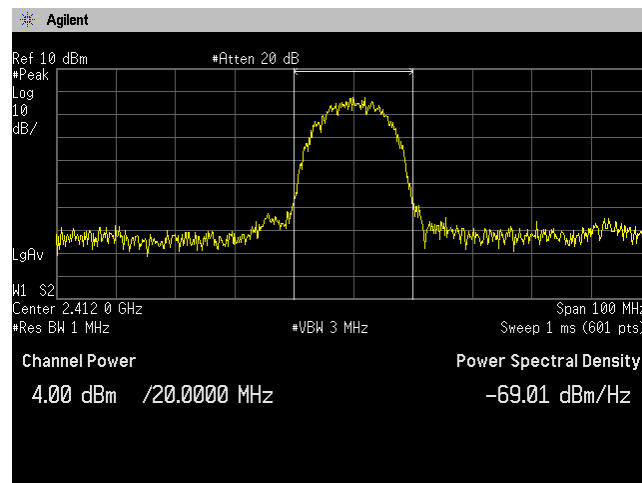

Channel 6: 2437.0MHz

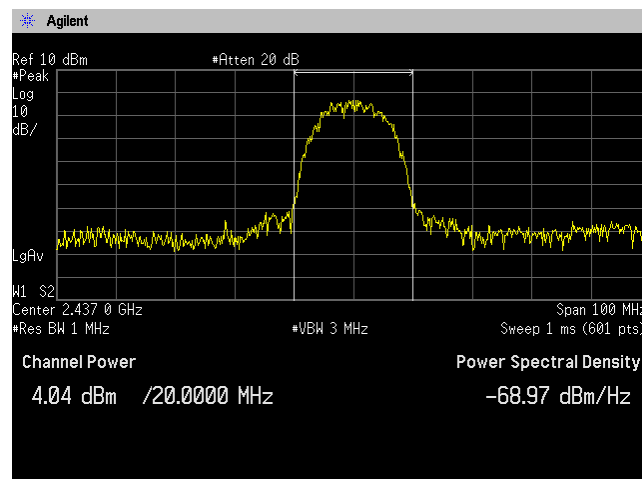


Channel 11: 2462.0MHz

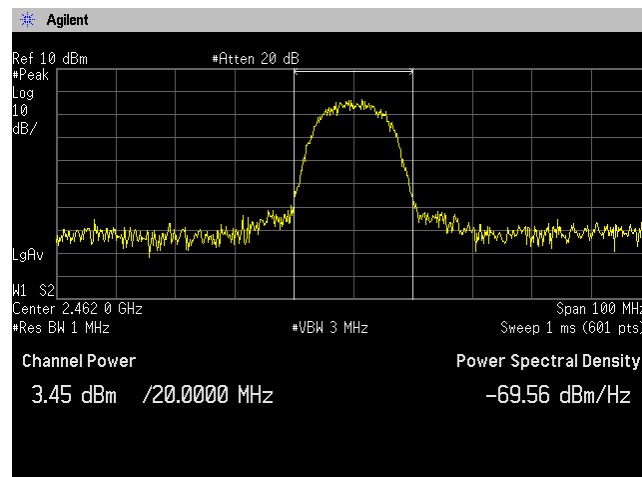


Maximum Peak Output Power - Conducted - [IEEE802.11g]


Channel 1: 2412.0MHz

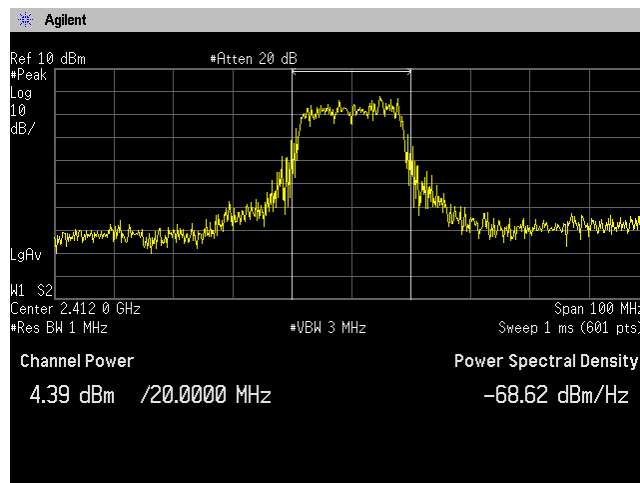

Channel 6: 2437.0MHz

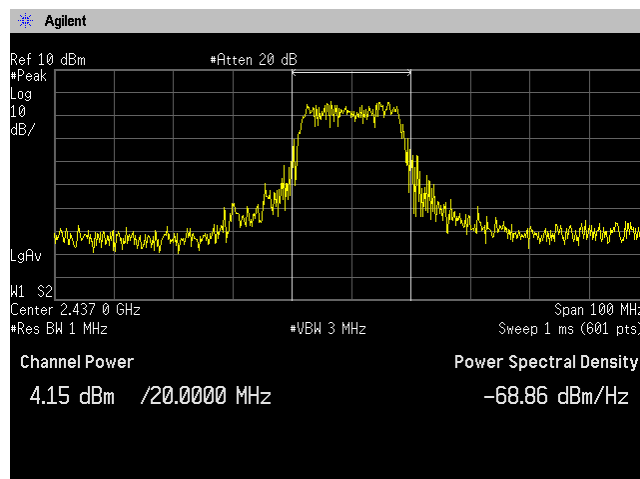

Channel 11: 2462.0MHz

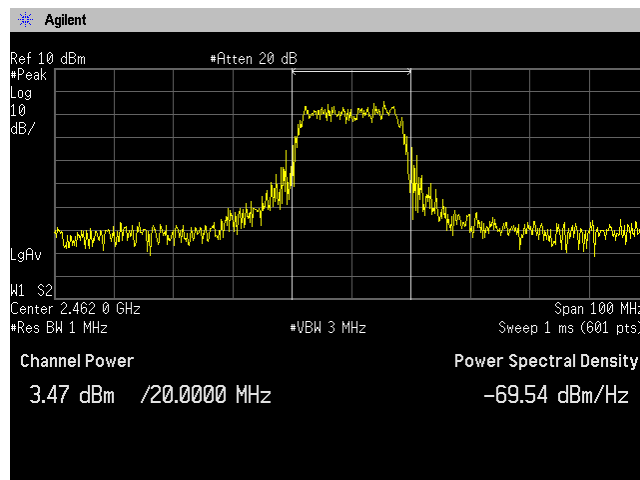

4.3 Band Edge Compliance of RF Conducted Emissions

4.3.1 Test Procedure [FCC 15.247 (d), IC RSS-210 A8.5]

The Band Edge is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

The spectrum analyzer is set to :

- RBW=100kHz, VBW=100kHz, Span=15MHz, Sweep=Auto


The EUT was set to operate with following conditions.

- ch 1 (low) and ch 11 (high)

The test mode of EUT is as follows.

- Tx mode

4.3.2 Test Instruments and Measurement Setup



4.3.3 Limit of Band-edge Compliance of RF Conducted Emissions

In any 100KHz bandwidth outside the frequency band the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100KHz bandwidth within the band that contains the highest level of the desired power.

4.3.4 Measurement Results of Band-edge

[IEEE802.11b]

Channel	Frequency (MHz)	RF Power Level (dBm)	Band-edge Frequency (MHz)	Band-edge Level (dBm)	Difference Level (dBm)	Limit (dBm)	Result
1	2412.00	-8.63	2401.50	-56.05	47.42	At least 20dB below from peak of RF	PASS
11	2462.00	-9.18	2472.75	-55.48	46.30	At least 20dB below from peak of RF	PASS

[IEEE802.11g]

Channel	Frequency (MHz)	RF Power Level (dBm)	Band-edge Frequency (MHz)	Band-edge Level (dBm)	Difference Level (dBm)	Limit (dBm)	Result
1	2412.00	-11.25	2396.38	-53.00	41.75	At least 20dB below from peak of RF	PASS
11	2462.00	-12.25	2479.12	-55.40	43.15	At least 20dB below from peak of RF	PASS

4.3.5 Trace Data

Test Personnel:


Tested by: Taiki Watanabe

Date : July. 16, 2009
Temperature : 26.0 [°C]
Humidity : 70.0 [%]
Test place : Shielded room


Band Edge Compliance of RF Conducted Emissions

[IEEE802.11b]

Channel 1: 2412.0MHz

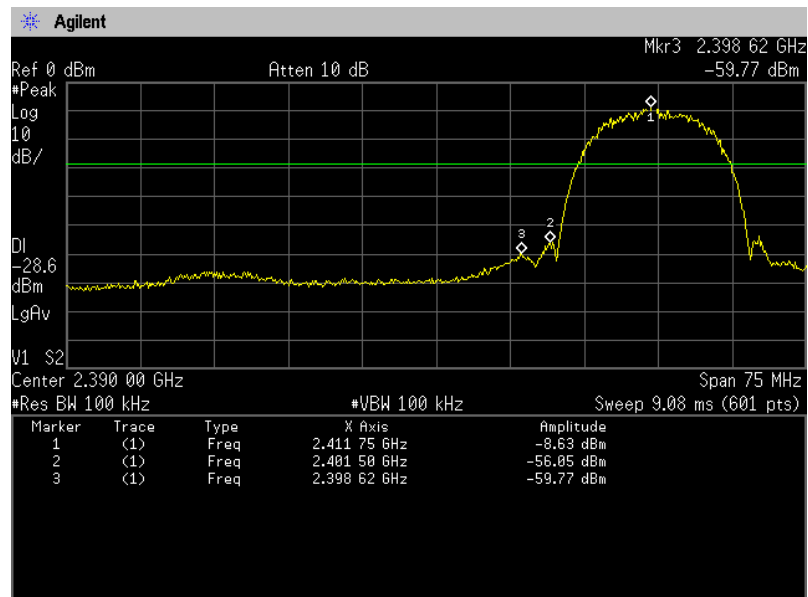


Channel 11: 2462.0MHz

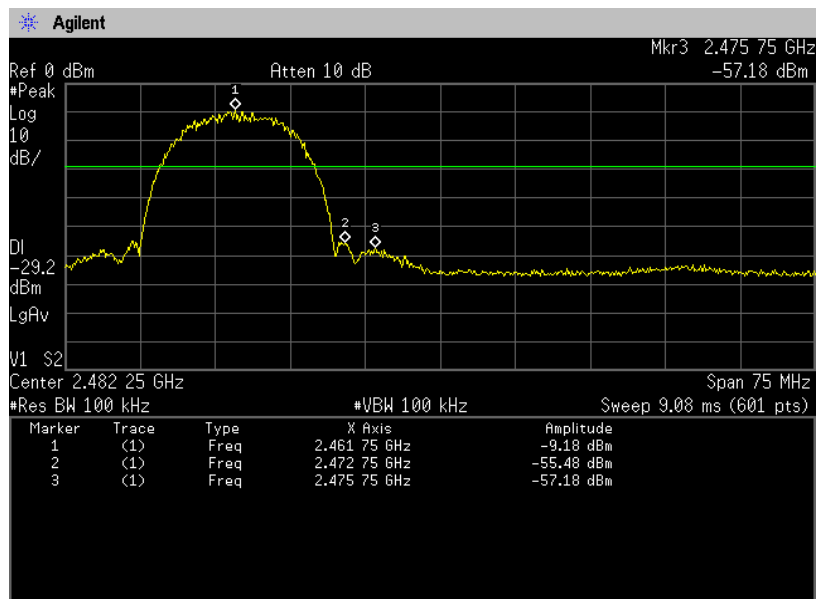


Band Edge Compliance of RF Conducted Emissions

[IEEE802.11g]

Channel 1: 2412.0MHz

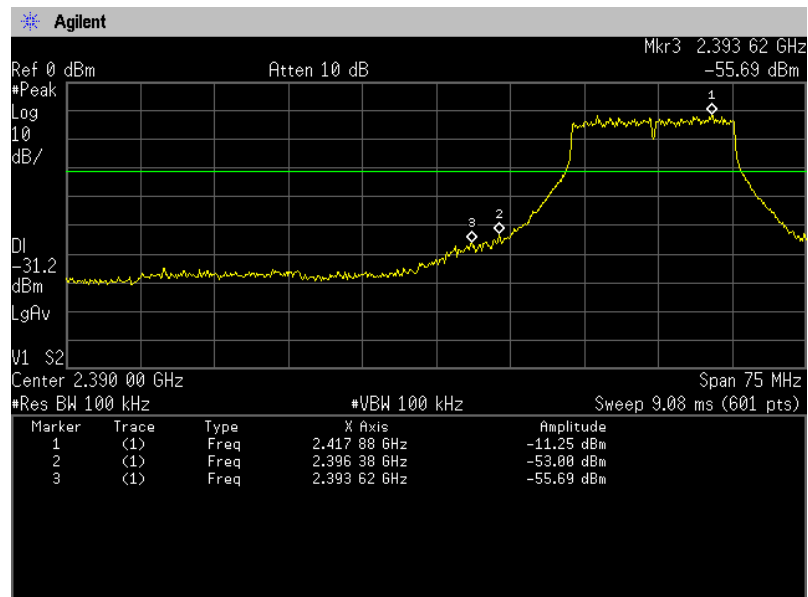

Channel 11: 2462.0MHz

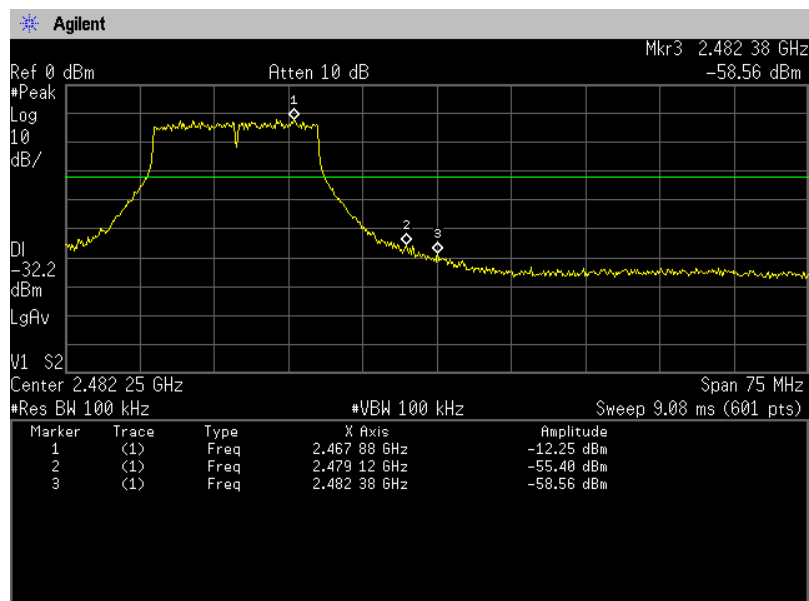

4.4 Spurious Emissions - Conducted -

4.4.1 Test Procedure [FCC 15.247(d), IC RSS-210 A8.5, RSS-Gen 4.9&4.10]

The spurious emissions (Conducted) are measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

The spectrum analyzer is set to:

- RBW=100kHz, VBW=300kHz, Span=Arbitrary setting, Sweep=Auto


The EUT was set to operate with following conditions.

- ch 1 (low), ch 6 (mid) and ch 11 (high)

The test mode of EUT is as follows.

- Tx mode

4.4.2 Measurement Setup



4.4.3 Limit of Spurious Emissions – Conducted –

In any 100KHz bandwidth outside the frequency band the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100KHz bandwidth within the band that contains the highest level of the desired power.

4.4.4 Measurement Results of Spurious Emissions – Conducted –

Channel	Frequency [MHz]	Limit [dBm]	Results Chart	Result
1	2405.0	At least 20dB below from peak of RF.	See the Trace Data	PASS
12	2438.0	At least 20dB below from peak of RF.	See the Trace Data	PASS
25	2477.0	At least 20dB below from peak of RF.	See the Trace Data	PASS

4.4.5 Trace Data

Test Personnel:

Tested by: Taiki Watanabe


Date : July. 16, 2009
Temperature : 26.0 [°C]
Humidity : 70.0 [%]
Test place : Shielded room

Spurious Emissions - Conducted -


[IEEE802.11b]

Channel 1: 2412.0MHz

30MHz-3GHz

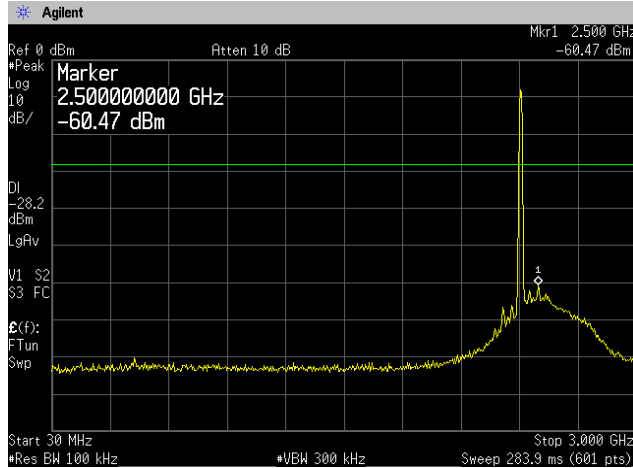


3GHz-26.5GHz

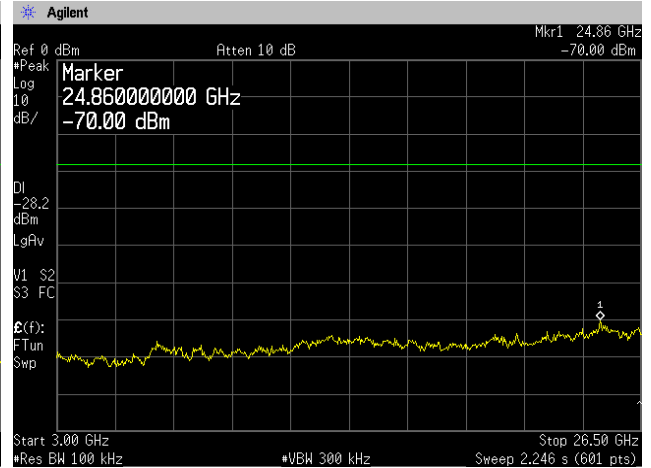


Channel 6: 2437.0MHz

30MHz-3GHz

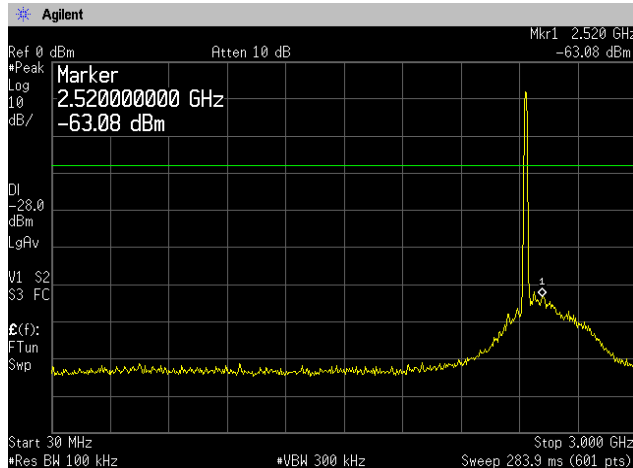


3GHz-26.5GHz

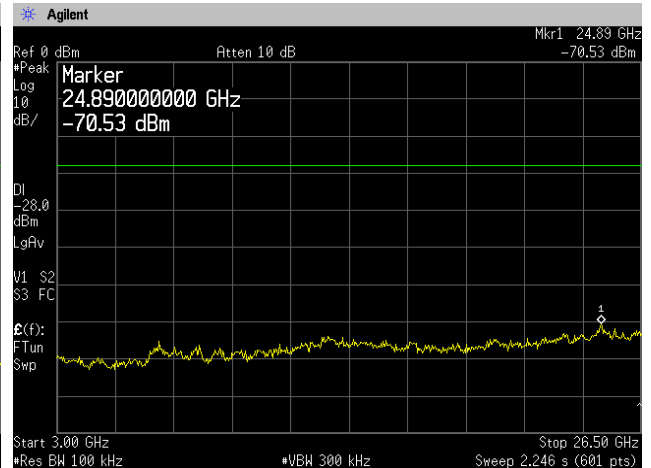


Channel 11: 2462.0MHz

30MHz-3GHz

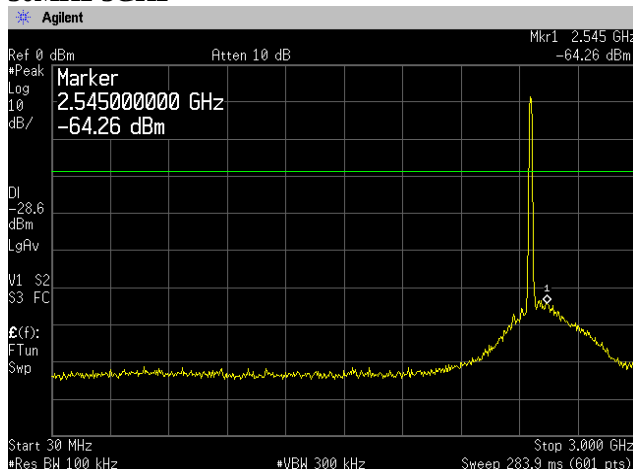

3GHz-26.5GHz

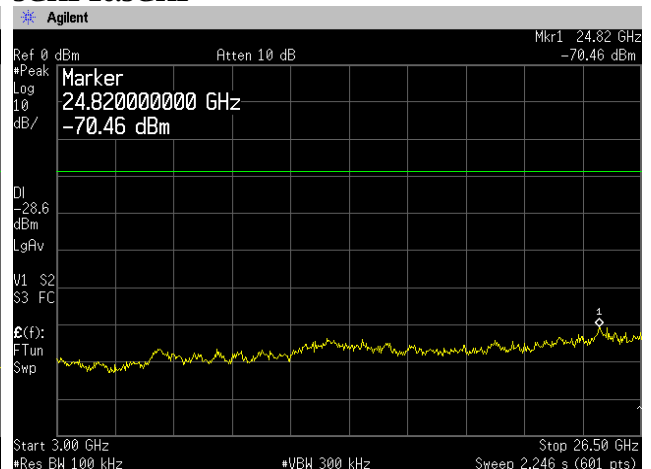


Spurious Emissions - Conducted -


[IEEE802.11g]

Channel 1: 2412.0MHz

30MHz-3GHz

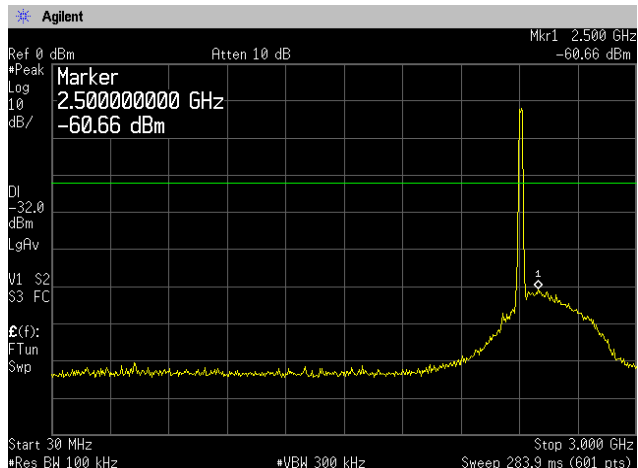


3GHz-26.5GHz

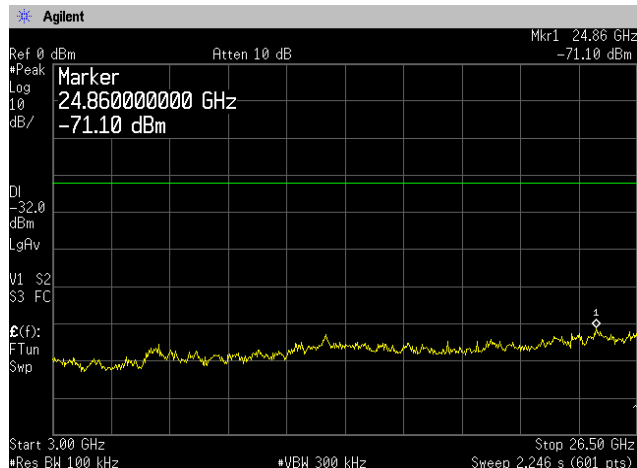

Channel 6: 2437.0MHz

30MHz-3GHz

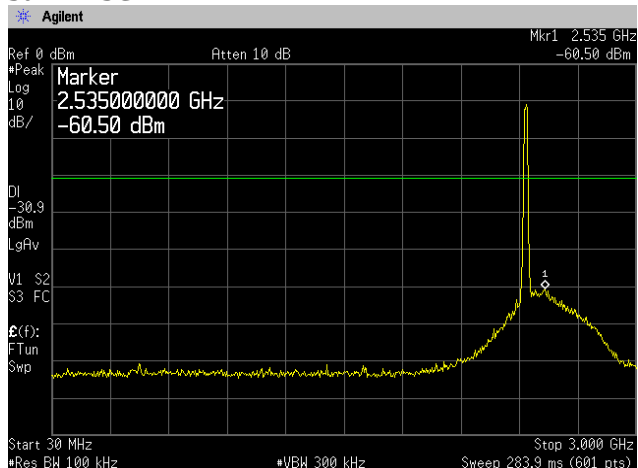


3GHz-26.5GHz



Channel 11: 2462.0MHz

30MHz-3GHz

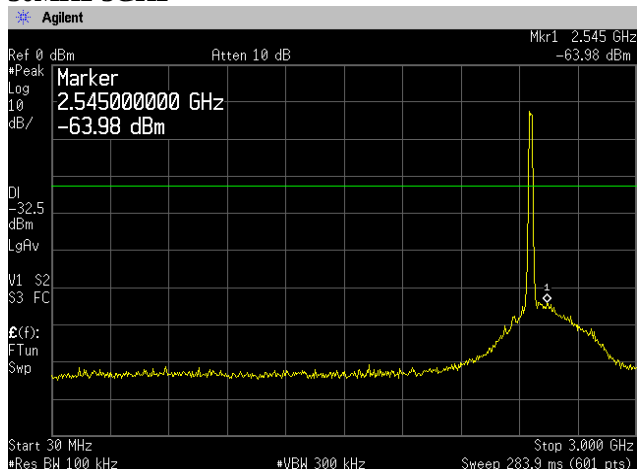

3GHz-26.5GHz



4.5 Spurious Emissions - Radiated - (9kHz – 25GHz)

4.5.1 Test Procedure [FCC 15.205/209/247(d), IC RSS-210 A8.5, RSS-Gen 4.9&4.10]

Radiated emission measurements are performed at 3m distance with the broadband antenna (Loop antenna, TRILOG antenna, and double-ridged guide antenna). The antenna is positioned both the horizontal and vertical planes of polarization and height is varied 1 to 4 meters and stopped at height producing the maximum emission. As for the Loop antenna, it is positioned with its plane vertical, and the center of the Loop is 1.0meter above the ground plane. Frequency Range: 9kHz –1GHz is scanned and investigated with the test receiver, and above 1GHz, with the spectrum analyzer. The detector function of the test receiver is set to CISPR Quasi-peak mode and the bandwidth is set to 120kHz. Peak and average detectors are used for measurements above 1GHz. The bandwidth of the spectrum analyzer is set to 1MHz.

The EUT and support equipment are placed on a 1meter x 2meter surface, 0.8meter height FRP table. The turntable is rotated by 360 degrees and stopped at azimuth of producing the maximum emission.

Interconnecting cables, which hanging closer than 40cm to the horizontal metal ground plane are bundled its excess in center. The highest fundamental frequency generated in the EUT is 2412-2462MHz, therefore the frequency was investigated up to 25GHz, as specified in CFR section 15.33, and at least six highest emissions are reported. The test results represent the worst-case emission for each emission with manipulating the EUT, support equipment, interconnecting cables and varying the mode of operation.

Sufficient time for the EUT, support equipment, and test equipment are allowed in order for them to warm up to their normal operating condition.

The spectrum analyzer is set to:

- Peak: RBW=1MHz, VBW=1MHz, Span=0Hz, Sweep=auto
- Average: RBW=1MHz, VBW=10Hz, Span=0Hz, Sweep=auto

The EUT was set to operate with following conditions.


- ch 1 (low), ch 6 (mid), ch 11 (high)

The test mode of EUT is as follows.

- Tx mode, Rx mode

4.5.2 Measurement Setup

Test configuration for Spurious emissions

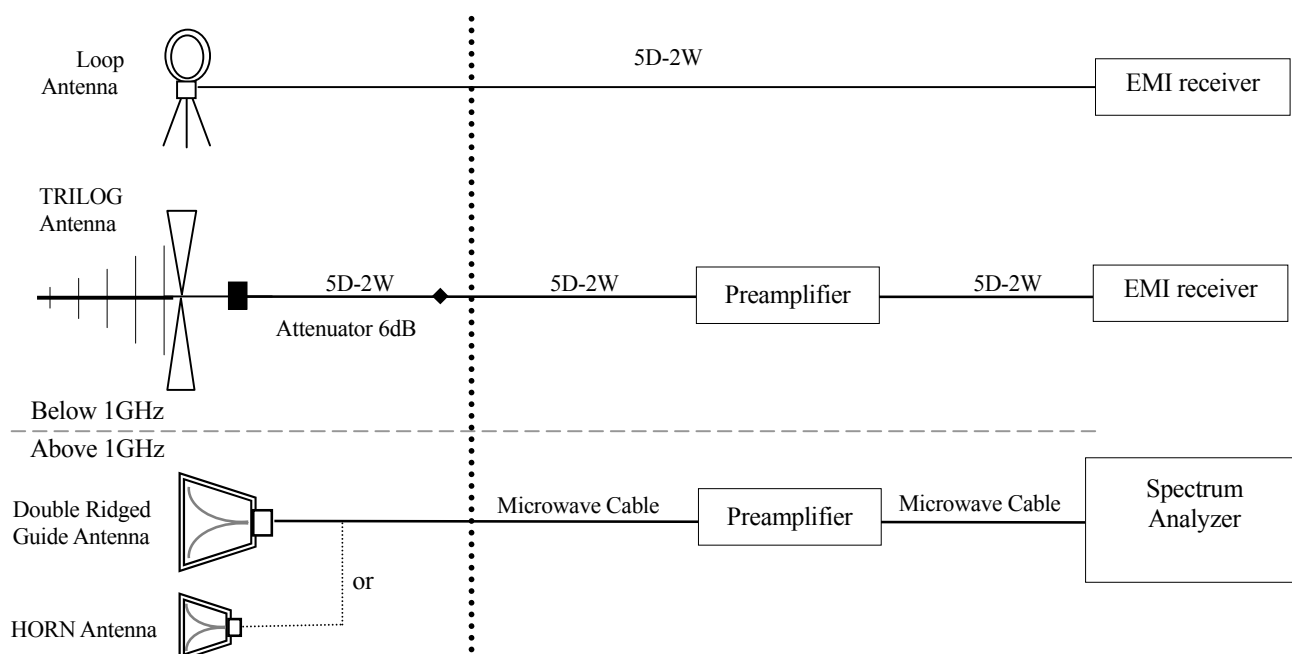

4.5.3 Limit of Spurious Emission Measurement

Frequency [MHz]	Field Strength	
	[uV/m]	[dBuV/m]
0.009 – 0.490	2400 / F [kHz]	20logE [uV/m]
0.490 – 1.705	24000 / F [kHz]	20logE [uV/m]
1.705-30	30	29.5
30 – 88	100	40.0
88 – 216	150	43.5
216 – 960	200	46.0
Above 960	500	54.0

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level [dBuV/m] = 20 log Emission [uV/m]
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.5.4 Sample of field strength calculation

Spurious Emission $\text{dB}\mu\text{V/m} = 20\log_{10} (\mu\text{V/m})$

Limit @ 147.6MHz = 150μV/m = 43.5dBμV/m
Reading = 42.8dBμV
Ant. Factor + Cable Loss – Amp. Gain = 14.2 + 3.0 – 30.0 = -12.8dB
Total = 42.8 – 12.8 = 30.0dBμV/m
Margin = 43.5 – 30.0 = <u>13.5dB</u>

4.5.5 Measurement Results

Test Personnel:

Tested by: Hiroaki Suzuki

Date : July. 22, 2009
Temperature : 25.9 [°C]
Humidity : 65.0 [%]
Test place : 3m Semi-anechoic chamber

Test Personnel:

Tested by: Hiroaki Suzuki

Date : July. 24, 2009
Temperature : 23.2 [°C]
Humidity : 62.3 [%]
Test place : 3m Semi-anechoic chamber

Spurious Emissions - Radiated [IEEE802.11b] <below 1GHz>

Tx Channel 1: 2412.0MHz

No.	Frequency [MHz]	(P)	Reading QP [dB(μV)]	c. f [dB(1/m)]	Result QP [dB(μV/m)]	Limit [dB(μV/m)]	Margin QP [dB]	Height [cm]	Angle [°]
1	83.266	H	42.7	-14.4	28.3	40.0	11.7	400.0	163.0
2	249.832	H	47.9	-9.2	38.7	46.0	7.3	141.0	200.0
3	283.177	H	43.8	-8.1	35.7	46.0	10.3	118.0	0.0
4	383.129	H	38.8	-5.7	33.1	46.0	12.9	100.0	0.0
5	400.000	H	38.7	-5.3	33.4	46.0	12.6	228.0	326.0
6	449.757	H	39.9	-4.1	35.8	46.0	10.2	203.0	325.0

Tx Channel 6: 2437.0MHz

No.	Frequency [MHz]	(P)	Reading QP [dB(μV)]	c. f [dB(1/m)]	Result QP [dB(μV/m)]	Limit [dB(μV/m)]	Margin QP [dB]	Height [cm]	Angle [°]
1	83.247	H	42.8	-14.4	28.4	40.0	11.6	400.0	168.0
2	249.849	H	47.4	-9.2	38.2	46.0	7.8	156.0	196.0
3	283.173	H	43.1	-8.1	35.0	46.0	11.0	115.0	0.0
4	383.134	H	39.2	-5.7	33.5	46.0	12.5	100.0	0.0
5	400.004	H	39.5	-5.3	34.2	46.0	11.8	230.0	337.0
6	449.772	H	39.6	-4.1	35.5	46.0	10.5	202.0	323.0

Tx Channel 11: 2462.0MHz

No.	Frequency [MHz]	(P)	Reading QP [dB(μV)]	c. f [dB(1/m)]	Result QP [dB(μV/m)]	Limit [dB(μV/m)]	Margin QP [dB]	Height [cm]	Angle [°]
1	83.257	H	43.0	-14.4	28.6	40.0	11.4	400.0	165.0
2	249.846	H	47.3	-9.2	38.1	46.0	7.9	141.0	195.0
3	283.160	H	43.0	-8.1	34.9	46.0	11.1	113.0	0.0
4	383.125	H	38.8	-5.7	33.1	46.0	12.9	100.0	0.0
5	400.010	H	39.4	-5.3	34.1	46.0	11.9	226.0	335.0
6	449.779	H	39.5	-4.1	35.4	46.0	10.6	202.0	322.0

Note:

1. Emission Level (Margin) = Limit – [Reading + Factor (Antenna + Cable – Amp)]
2. No emissions were detected in frequency range 9kHz to 30MHz at the 3 meters distance.

Spurious Emissions - Radiated [IEEE802.11g] <below 1GHz>

Tx Channel 1: 2412.0MHz

No.	Frequency [MHz]	(P)	Reading QP [dB(μV)]	c. f [dB(1/m)]	Result QP [dB(μV/m)]	Limit [dB(μV/m)]	Margin QP [dB]	Height [cm]	Angle [°]
1	83.261	H	43.3	-14.4	28.9	40.0	11.1	400.0	334.0
2	249.842	H	47.2	-9.2	38.0	46.0	8.0	147.0	199.0
3	283.161	H	43.0	-8.1	34.9	46.0	11.1	114.0	0.0
4	383.137	V	41.7	-5.7	36.0	46.0	10.0	159.0	270.0
5	400.004	H	39.3	-5.3	34.0	46.0	12.0	236.0	337.0
6	449.770	H	38.7	-4.1	34.6	46.0	11.4	211.0	322.0

Tx Channel 6: 2437.0MHz

No.	Frequency [MHz]	(P)	Reading QP [dB(μV)]	c. f [dB(1/m)]	Result QP [dB(μV/m)]	Limit [dB(μV/m)]	Margin QP [dB]	Height [cm]	Angle [°]
1	83.259	H	43.0	-14.4	28.6	40.0	11.4	400.0	336.0
2	249.857	H	46.1	-9.2	36.9	46.0	9.1	161.0	194.0
3	283.156	H	41.0	-8.1	32.9	46.0	13.1	109.0	0.0
4	383.148	V	42.6	-5.7	36.9	46.0	9.1	139.0	274.0
5	400.005	H	39.5	-5.3	34.2	46.0	11.8	227.0	334.0
6	449.754	H	38.2	-4.1	34.1	46.0	11.9	210.0	323.0

Tx Channel 11: 2462.0MHz

No.	Frequency [MHz]	(P)	Reading QP [dB(μV)]	c. f [dB(1/m)]	Result QP [dB(μV/m)]	Limit [dB(μV/m)]	Margin QP [dB]	Height [cm]	Angle [°]
1	83.260	H	42.5	-14.4	28.1	40.0	11.9	400.0	341.0
2	249.855	H	46.6	-9.2	37.4	46.0	8.6	163.0	194.0
3	283.150	H	42.1	-8.1	34.0	46.0	12.0	111.0	0.0
4	383.140	V	42.2	-5.7	36.5	46.0	9.5	141.0	277.0
5	400.003	H	39.2	-5.3	33.9	46.0	12.1	231.0	337.0
6	449.755	H	38.5	-4.1	34.4	46.0	11.6	212.0	325.0

Note:

1. Emission Level (Margin) = Limit – [Reading + Factor (Antenna + Cable – Amp)]
2. No emissions were detected in frequency range 9kHz to 30MHz at the 3 meters distance.

Spurious Emissions - Radiated [IEEE802.11b] <above 1GHz>

Tx mode

No.	Frequency [MHz]	(P)	Reading AV [dB(μV)]	Reading PK [dB(μV)]	c. f [dB(1/m)]	Result AV [dB(μV/m)]	Result PK [dB(μV/m)]	Limit [dB(μV/m)]	Margin AV [dB]	Margin PK [dB]	Height [cm]	Angle [°]	Remark
1	4824.000	H		45.5	2.7		48.2	74.0		25.8	100.0	171.0	CH:LOW
2	4824.000	H	32.9		2.7	35.6		54.0	18.4		100.0	171.0	
3	7236.000	H		47.6	6.7		54.3	74.0		19.7	100.0	187.0	
4	7236.000	H	34.4		6.7	41.1		54.0	12.9		100.0	187.0	
5	4874.000	H		46.4	2.8		49.2	74.0		24.8	100.0	209.0	CH:MID
6	4874.000	H	33.4		2.8	36.2		54.0	17.8		100.0	209.0	
7	7311.000	H		47.2	7.0		54.2	74.0		19.8	107.0	192.0	
8	7311.000	H	34.3		7.0	41.3		54.0	12.7		107.0	192.0	
9	4924.000	H		47.0	3.0		50.0	74.0		24.0	100.0	175.0	CH:HIGH
10	4924.000	H	33.4		3.0	36.4		54.0	17.6		100.0	175.0	
11	7386.000	H		47.5	7.2		54.7	74.0		19.3	113.0	171.0	
12	7386.000	H	34.1		7.2	41.3		54.0	12.7		113.0	171.0	

Note:

1. Emission Level (Margin) = Limit – [Reading + Factor (Antenna + Cable – Amp)]

Spurious Emissions - Radiated [IEEE802.11g] <above 1GHz>

Tx mode

No.	Frequency [MHz]	(P)	Reading AV [dB(μV)]	Reading PK [dB(μV)]	c. f [dB(1/m)]	Result AV [dB(μV/m)]	Result PK [dB(μV/m)]	Limit [dB(μV/m)]	Margin AV [dB]	Margin PK [dB]	Height [cm]	Angle [°]	Remark
1	4824.000	H		46.1	2.7		48.8	74.0		25.2	100.0	178.0	CH:LOW
2	4824.000	H	33.0		2.7	35.7		54.0	18.3		100.0	178.0	
3	7236.000	H		47.4	6.7		54.1	74.0		19.9	101.0	176.0	
4	7236.000	H	34.4		6.7	41.1		54.0	12.9		101.0	176.0	
5	4874.000	H		46.5	2.8		49.3	74.0		24.7	100.0	173.0	CH:MID
6	4874.000	H	33.4		2.8	36.2		54.0	17.8		100.0	173.0	
7	7311.000	H		47.7	7.0		54.7	74.0		19.3	110.0	177.0	
8	7311.000	H	34.4		7.0	41.4		54.0	12.6		110.0	177.0	
9	4924.000	H		46.3	3.0		49.3	74.0		24.7	100.0	179.0	CH:HIGH
10	4924.000	H	33.2		3.0	36.2		54.0	17.8		100.0	179.0	
11	7386.000	H		47.2	7.2		54.4	74.0		19.6	105.0	179.0	
12	7386.000	H	34.0		7.2	41.2		54.0	12.8		105.0	179.0	

Note:

1. Emission Level (Margin) = Limit – [Reading + Factor (Antenna + Cable – Amp)]

Spurious Emissions - Radiated

Rx Channel 1: 2412.0MHz

No.	Frequency	(P)	Reading QP	c. f	Result QP	Limit	Margin QP	Height	Angle
	[MHz]		[dB(μV)]	[dB(1/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB]	[cm]	[°]
1	83.257	H	42.8	-14.4	28.4	40.0	11.6	400.0	336.0
2	249.846	H	47.8	-9.2	38.6	46.0	7.4	163.0	196.0
3	283.174	H	43.7	-8.1	35.6	46.0	10.4	119.0	0.0
4	383.138	V	42.2	-5.7	36.5	46.0	9.5	156.0	275.0
5	400.000	H	38.8	-5.3	33.5	46.0	12.5	230.0	337.0
6	449.755	H	38.1	-4.1	34.0	46.0	12.0	210.0	322.0

Rx Channel 6: 2437.0MHz

No.	Frequency	(P)	Reading QP	c. f	Result QP	Limit	Margin QP	Height	Angle
	[MHz]		[dB(μV)]	[dB(1/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB]	[cm]	[°]
1	83.246	H	44.2	-14.4	29.8	40.0	10.2	400.0	333.0
2	249.856	H	47.1	-9.2	37.9	46.0	8.1	159.0	199.0
3	283.150	H	43.0	-8.1	34.9	46.0	11.1	109.0	0.0
4	383.134	V	42.3	-5.7	36.6	46.0	9.4	150.0	275.0
5	400.000	H	39.0	-5.3	33.7	46.0	12.3	224.0	332.0
6	449.755	H	38.2	-4.1	34.1	46.0	11.9	221.0	320.0

Rx Channel 11: 2462.0MHz

No.	Frequency	(P)	Reading QP	c. f	Result QP	Limit	Margin QP	Height	Angle
	[MHz]		[dB(μV)]	[dB(1/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB]	[cm]	[°]
1	83.256	H	44.1	-14.4	29.7	40.0	10.3	400.0	332.0
2	249.829	H	45.9	-9.2	36.7	46.0	9.3	159.0	193.0
3	283.179	H	43.0	-8.1	34.9	46.0	11.1	108.0	0.0
4	383.124	V	42.0	-5.7	36.3	46.0	9.7	149.0	272.0
5	400.004	H	39.3	-5.3	34.0	46.0	12.0	210.0	335.0
6	449.750	H	37.5	-4.1	33.4	46.0	12.6	232.0	325.0

Note:

1. Emission Level (Margin) = Limit – [Reading + Factor (Antenna + Cable - Amp)]
2. No emissions were detected in frequency range 9kHz to 30MHz at the 3 meters distance.
3. No emissions were detected in frequency range above 1GHz at the 3 meters distance.

4.6 Restricted Band of Operation

4.6.1 Test Procedure [FCC 15.205, 15.209, 15.247(d), IC RSS-210 2.2]

The peak power is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

The spectrum analyzer is set to:

- Peak: RBW=1MHz, VBW=1MHz, Span=40MHz, Sweep=auto
- Average: RBW=1MHz, VBW=10Hz, Span=40MHz, Sweep=auto


The EUT was set to operate with following conditions.

- ch 1 (low), ch 11 (high)]

The test mode of EUT is as follows.

- Tx mode

4.6.2 Measurement Setup

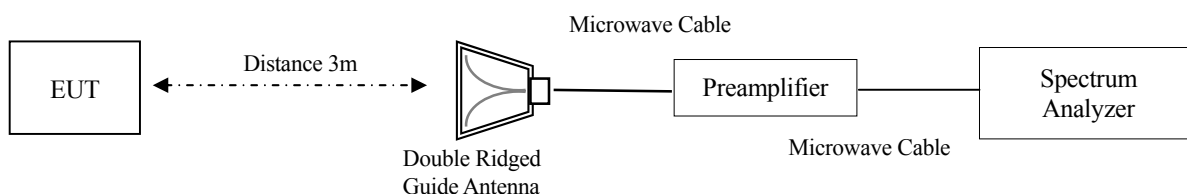

4.6.3 Limit of Restricted Band of Operation

Emission at the boundary of the restricted band provided by 15.205 shall be lower than 15.209 limit.

4.6.4 Measurement Result

[IEEE802.11b]

No.	Frequency [MHz]	(P)	Reading AV [dB(μV)]	Reading PK [dB(μV)]	c. f [dB(1/m)]	Result AV [dB(μV/m)]	Result PK [dB(μV/m)]	Limit [dB(μV/m)]	Margin AV [dB]	Margin PK [dB]	Height [cm]	Angle [°]
1	2390.000	H		55.6	-2.6		53.0	74.0		21.0	100.0	6.0
2	2390.000	H	45.0		-2.6	42.4		54.0	11.6		100.0	6.0
3	2390.000	V		48.6	-2.6		46.0	74.0		28.0	100.0	166.0
4	2390.000	V	38.1		-2.6	35.5		54.0	18.5		100.0	166.0
5	2483.500	H		58.0	-2.3		55.7	74.0		18.3	100.0	5.0
6	2483.500	H	46.0		-2.3	43.7		54.0	10.3		100.0	5.0
7	2483.500	V		49.2	-2.3		46.9	74.0		27.1	100.0	315.0
8	2483.500	V	38.4		-2.3	36.1		54.0	17.9		100.0	315.0

[IEEE802.11g]

No.	Frequency [MHz]	(P)	Reading AV [dB(μV)]	Reading PK [dB(μV)]	c.f [dB(1/m)]	Result AV [dB(μV/m)]	Result PK [dB(μV/m)]	Limit [dB(μV/m)]	Margin AV [dB]	Margin PK [dB]	Height [cm]	Angle [°]
1	2390.000	H	-----	59.0	-2.6	-----	56.4	74.0	-----	17.6	100.0	6.0
2	2390.000	H	46.3	-----	-2.6	43.7	-----	54.0	10.3	-----	100.0	6.0
3	2390.000	V	-----	48.9	-2.6	-----	46.3	74.0	-----	27.7	100.0	165.0
4	2390.000	V	38.4	-----	-2.6	35.8	-----	54.0	18.2	-----	100.0	165.0
5	2483.500	H	-----	60.6	-2.3	-----	58.3	74.0	-----	15.7	100.0	8.0
6	2483.500	H	48.8	-----	-2.3	46.5	-----	54.0	7.5	-----	100.0	8.0
7	2483.500	V	-----	53.1	-2.3	-----	50.8	74.0	-----	23.2	100.0	314.0
8	2483.500	V	40.5	-----	-2.3	38.2	-----	54.0	15.8	-----	100.0	314.0

4.6.5 Trace Data

Test Personnel:

Tested by:


Hiroaki Suzuki

Date : July. 7, 2009
Temperature : 24.6 [°C]
Humidity : 66.7 [%]
Test place : 3m Semi-anechoic chamber


Restricted Band of Operation [IEEE802.11b]

Frequency: 2390.0MHz -Horizontal-

Peak

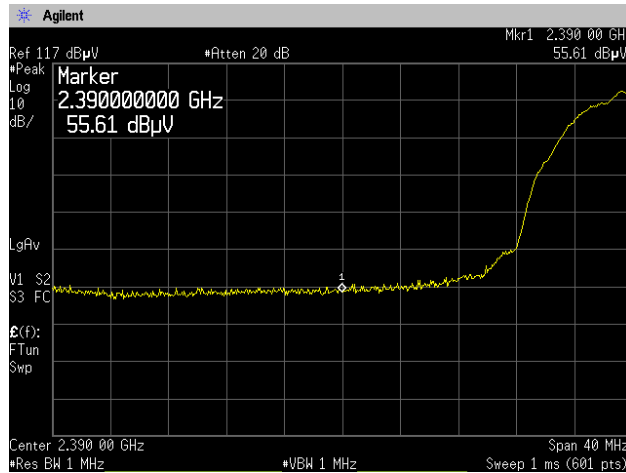


Average

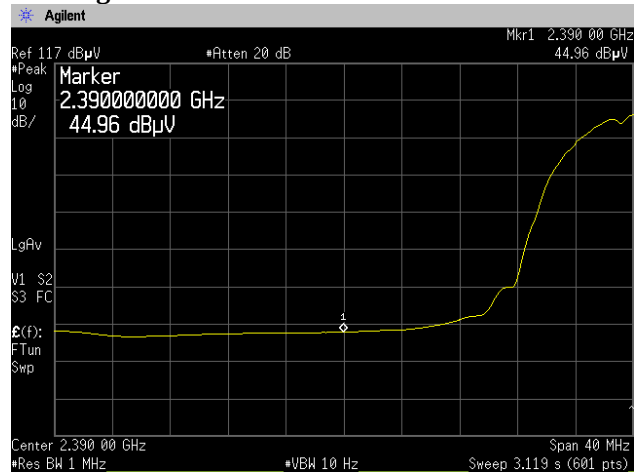


Frequency: 2390.0MHz -Vertical-

Peak

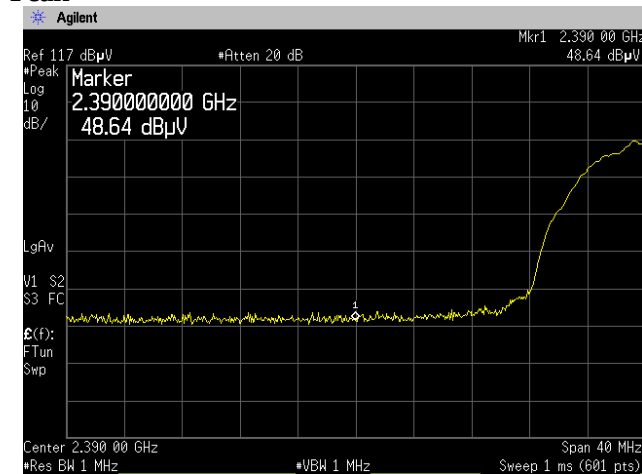


Average

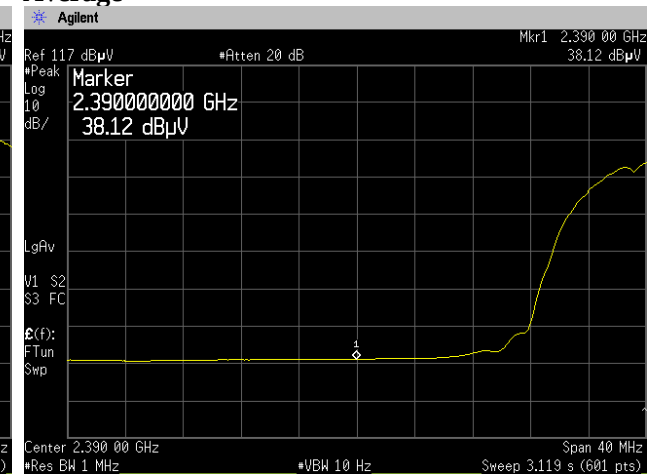


Restricted Band of Operation [IEEE802.11b]

Frequency: 2483.5MHz -Horizontal-

Peak

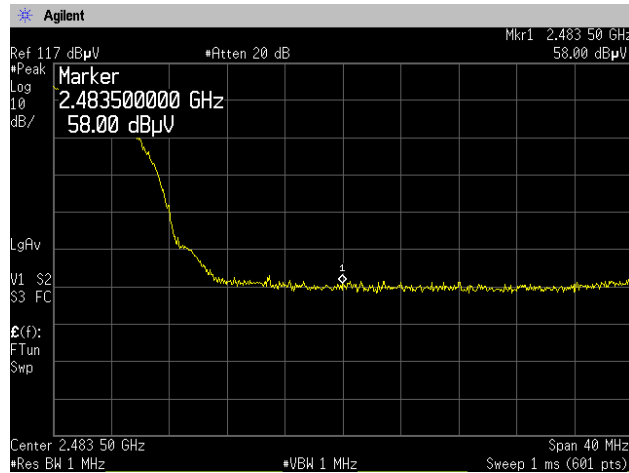


Average

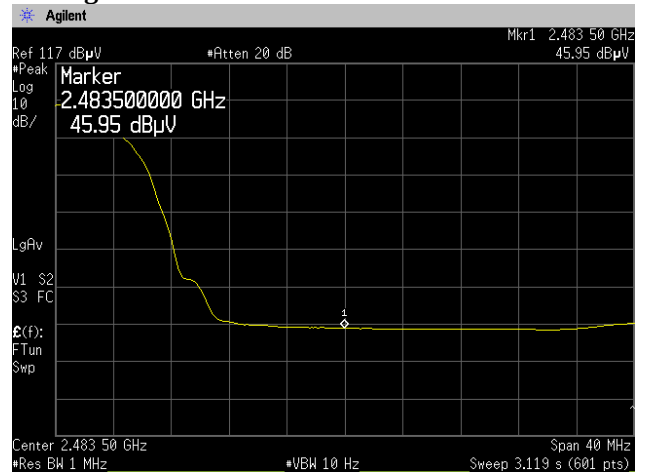


Frequency: 2483.5MHz -Vertical-

Peak

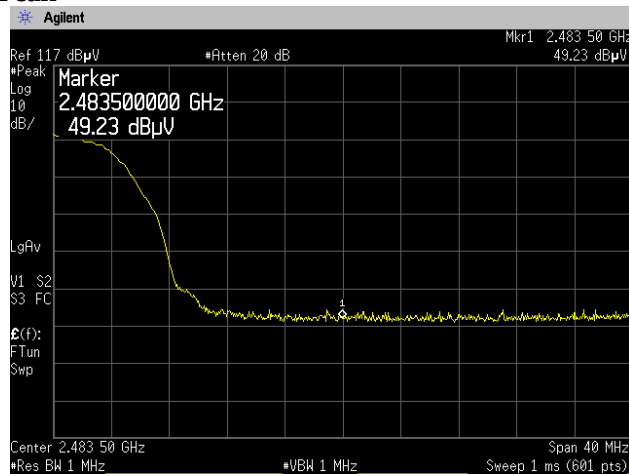


Average

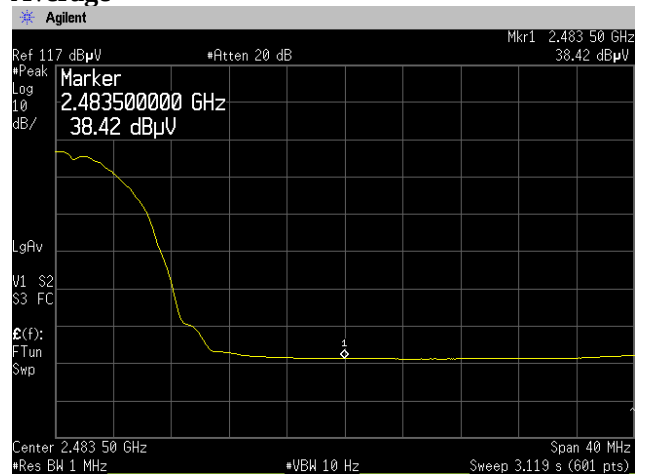


Restricted Band of Operation [IEEE802.11g]

Frequency: 2390.0MHz -Horizontal-

Peak

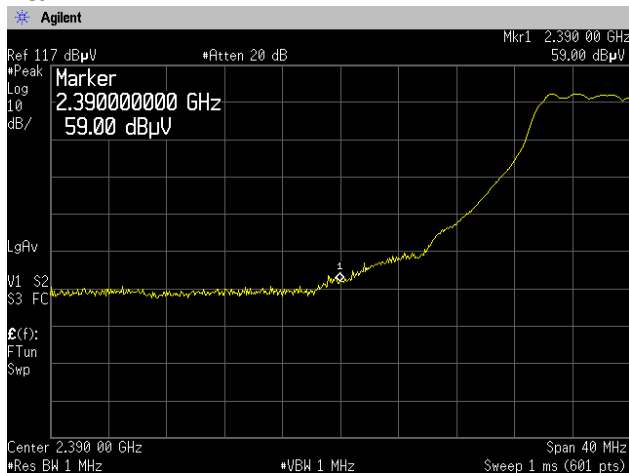


Average

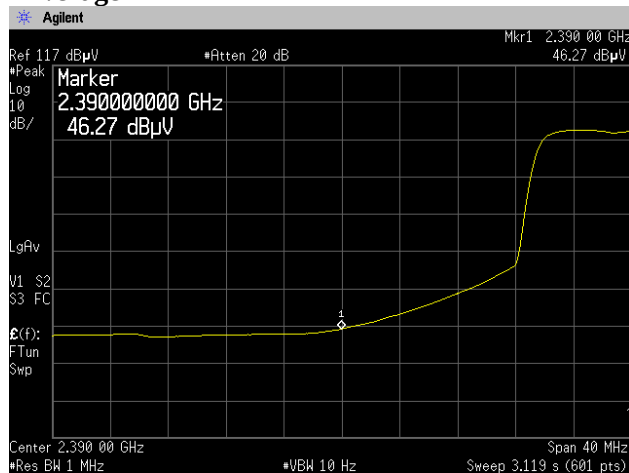


Frequency: 2390.0MHz -Vertical-

Peak

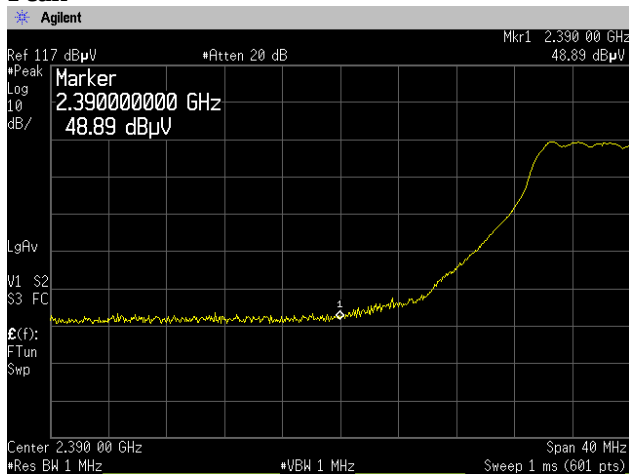


Average

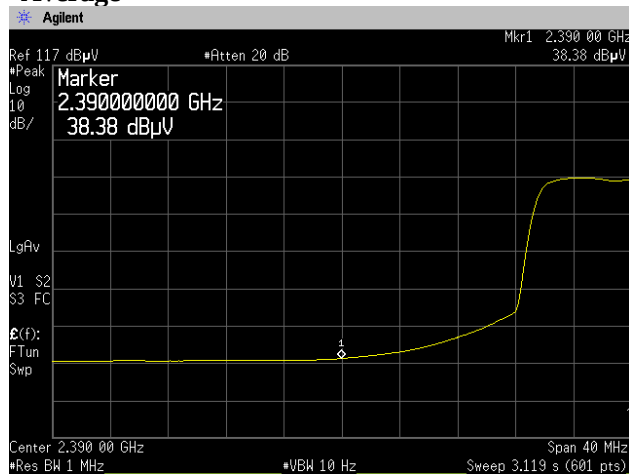


Restricted Band of Operation [IEEE802.11g]

Frequency: 2483.5MHz -Horizontal-

Peak

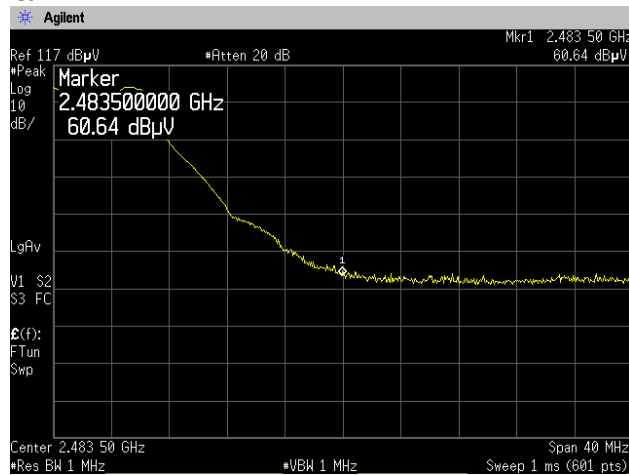


Average

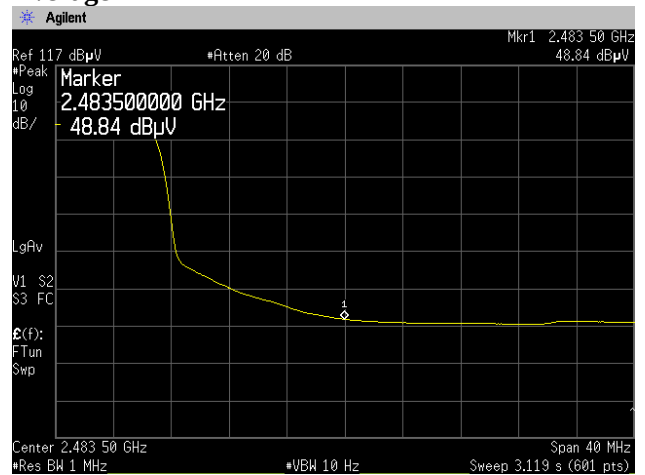


Frequency: 2483.5MHz -Vertical-

Peak

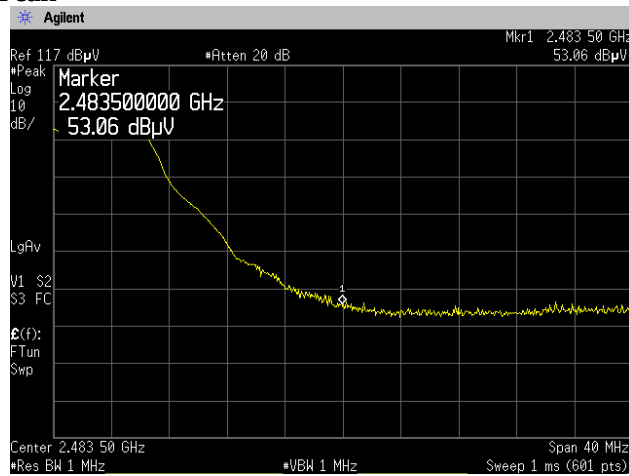

Average

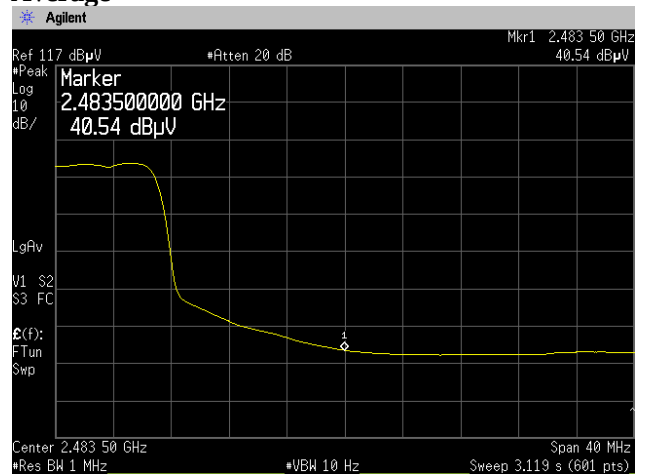

4.7 Transmitter Power Spectral Density

4.7.1 Test Procedure [FCC 15.247(d), IC RSS-210 A8.2(b)]

The peak power density is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

The spectrum analyzer is set to:

RBW= 3kHz, VBW=10kHz, Span=300kHz, Sweep = 100sec.


The EUT was set to operate with following conditions.

- ch 1 (low), ch 6 (mid), ch 11 (high)]

The test mode of EUT is as follows.

- Tx mode

4.7.2 Measurement Setup



4.7.3 Limit of Transmitter Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band.

4.7.4 Measurement Results

[IEEE802.11b]

Channel	Center Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dBm)	Result
1	2412.00	-23.92	10.66	-13.26	8.00	21.26	PASS
6	2437.00	-23.27	10.66	-12.61	8.00	20.61	PASS
11	2462.00	-23.81	10.66	-13.15	8.00	21.15	PASS

[IEEE802.11g]

Channel	Center Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dBm)	Result
1	2412.00	-29.71	10.66	-19.05	8.00	27.05	PASS
6	2437.00	-28.14	10.66	-17.48	8.00	25.48	PASS
11	2462.00	-30.27	10.66	-19.61	8.00	27.61	PASS

Note: Transmitter Power Spectral Density Level (Margin) = Limit – [Reading + Factor (Cable)]

4.7.5 Trace Data


Test Personnel:

Tested by: Taiki Watanabe


Date : July. 16, 2009
Temperature : 26.0 [°C]
Humidity : 70.0 [%]
Test place : Shielded room

Transmitter Power Spectral Density [IEEE802.11b]


Channel 1: 2412.0MHz

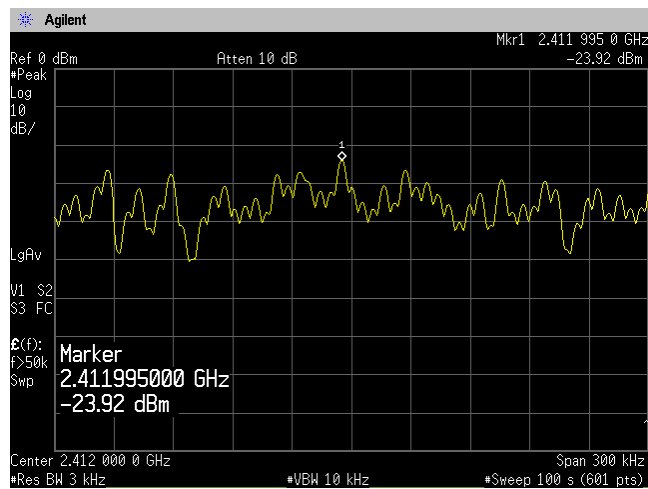


Channel 6: 2437.0MHz

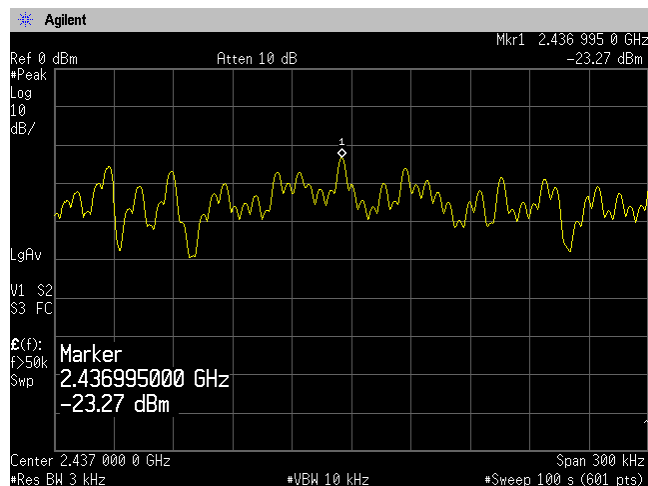


Channel 11: 2462.0MHz

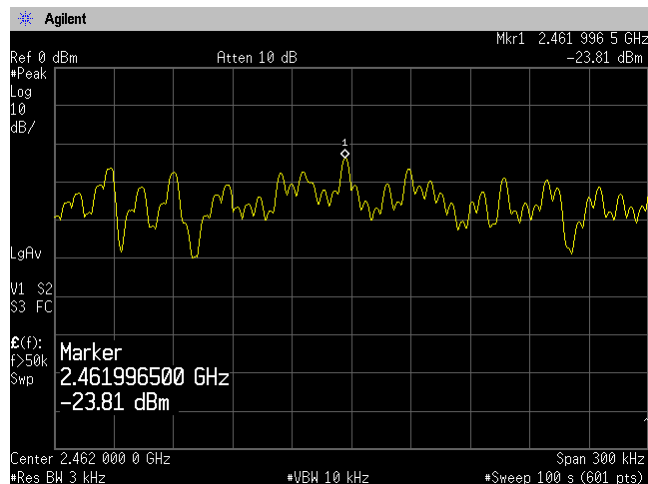


Transmitter Power Spectral Density [IEEE802.11g]
Channel 1: 2412.0MHz

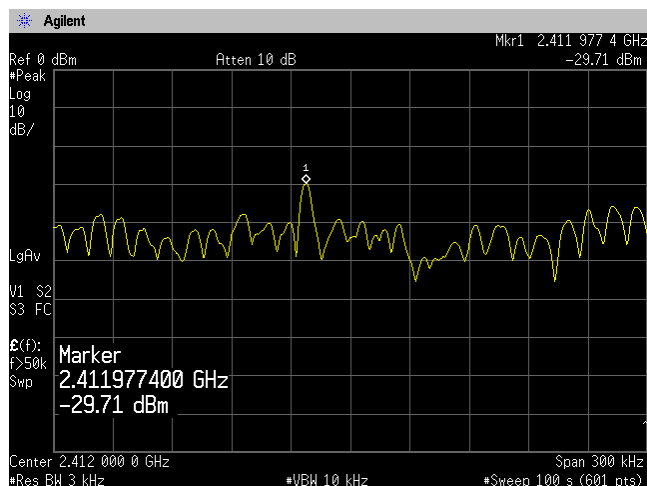

Channel 6: 2437.0MHz

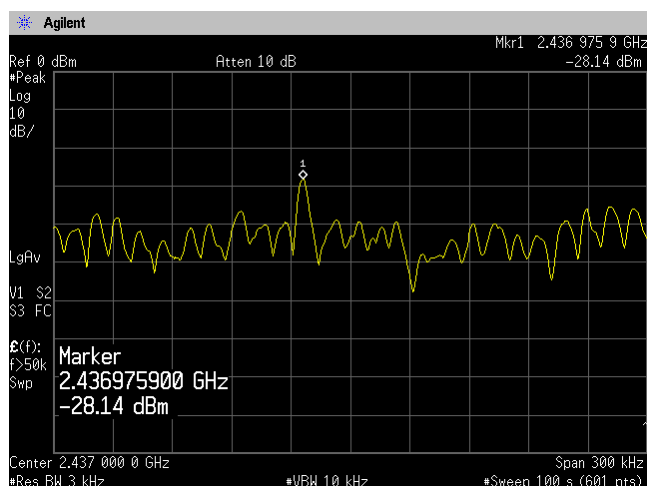

Channel 11: 2462.0MHz

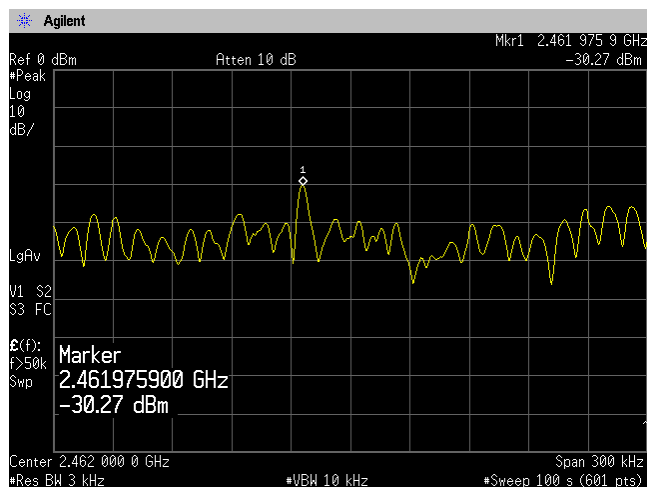

4.8 AC power line Conducted Emissions

4.8.1 Test Procedure [FCC 15.207, IC RSS-Gen 7.2.2]

Conducted emission at AC mains port measurements are performed at open area test site according to ANSI C63.4 section 7.

EUT and support equipment are placed on wooden table of 2.0m(W) × 1.0m(D) × 0.8m(H) in size. EUT is connected to 50Ω/50μH Line impedance stabilization network (LISN) which is placed on reference ground plane, and was placed 80cm away from EUT. Excess of AC power cable is bundled in center. Vertical Metal Reference Plane 2.0m (W) × 2.0m (H) in size is placed 0.4m away from EUT. LISN for peripheral is terminated in 50Ω.

EUT operating mode is selected to emit the maximum noise. Overall frequency range is investigated with spectrum analyzer using peak detector. Maximum emission configuration is determined by manipulating the EUT, support equipment, interconnecting cables. Then, emission measurements are performed with test receiver in above setting to each current-carrying conductor of the mains port. Sufficient time for EUT, support equipment and test equipment are provided in order for them to warm up to their normal operating condition.

Frequency range:

- 0.15MHz to 30MHz


The Test receiver is set to:

Detector: Quasi-peak, Average

Bandwidth: 9kHz

4.8.2 Measurement Setup

Test configuration for AC power line Conducted Emissions

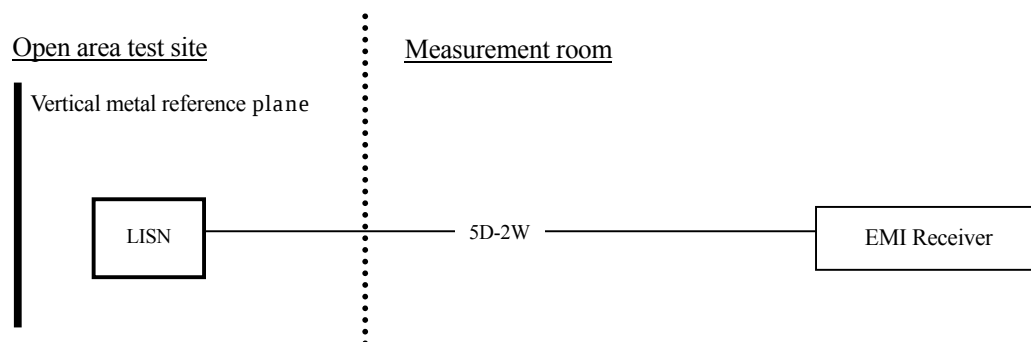


4.8.3 Limit of AC power line Conducted Emissions Measurement (Sample calculation)

Frequency	Limit		Sample of field strength calculation
	QP(dBμV)	AV(dBμV)	
0.15MHz to 0.5MHz	66 to 56*	56 to 46*	$\text{dB}\mu\text{V} = 20\log_{10}(\mu\text{V})$ Limit @ : 60.0dBμV(Quasi-peak) 6.770MHz : 50.0dBμV(Average)
0.5MHz to 5MHz	56	46	(Quasi peak) Reading = 51.2dBμV Cable loss + AMN factor = 0.3dB Total = 51.2 + 0.3 = 51.5dBμV Margin = 60.0 – 51.5 = 8.5dB
5MHz to 30MHz	60	50	(Average) Reading = 45.0dBμV Cable loss + AMN factor = 0.3dB Total = 45.0 + 0.3 = 45.3dBμV Margin = 50.0 – 45.3 = 4.7dB

*: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

4.8.4 Measurement Result

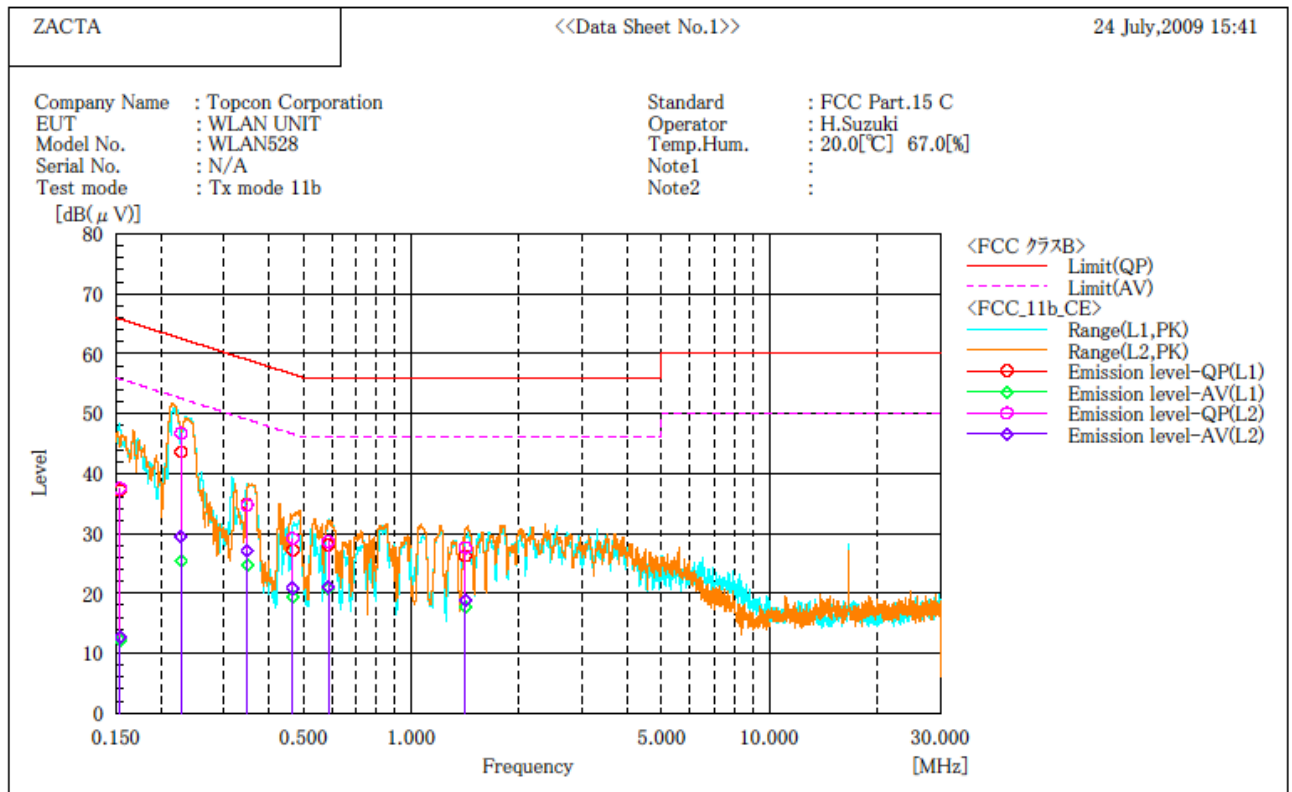


Final Result

--- L1 Phase ---

No.	Frequency [MHz]	Reading QP [dB(μV)]	Reading AV [dB(μV)]	c. f [dB]	Result QP [dB(μV)]	Result AV [dB(μV)]	Limit QP [dB(μV)]	Limit AV [dB(μV)]	Margin QP [dB]	Margin AV [dB]
1	0.154	26.1	0.9	11.1	37.2	12.0	65.8	55.8	28.6	43.8
2	0.228	33.0	14.8	10.6	43.6	25.4	62.5	52.5	18.9	27.1
3	0.349	24.8	14.7	10.0	34.8	24.7	59.0	49.0	24.2	24.3
4	0.468	17.5	9.6	9.7	27.2	19.3	56.5	46.5	29.3	27.2
5	0.587	18.4	11.1	9.7	28.1	20.8	56.0	46.0	27.9	25.2
6	1.418	16.5	7.9	9.7	26.2	17.6	56.0	46.0	29.8	28.4

--- L2 Phase ---

No.	Frequency [MHz]	Reading QP [dB(μV)]	Reading AV [dB(μV)]	c. f [dB]	Result QP [dB(μV)]	Result AV [dB(μV)]	Limit QP [dB(μV)]	Limit AV [dB(μV)]	Margin QP [dB]	Margin AV [dB]
1	0.154	26.4	1.5	11.1	37.5	12.6	65.8	55.8	28.3	43.2
2	0.228	36.1	18.9	10.6	46.7	29.5	62.5	52.5	15.8	23.0
3	0.349	24.7	17.1	10.0	34.7	27.1	59.0	49.0	24.3	21.9
4	0.468	19.4	11.2	9.7	29.1	20.9	56.5	46.5	27.4	25.6
5	0.587	18.9	11.4	9.7	28.6	21.1	56.0	46.0	27.4	24.9
6	1.418	17.9	9.1	9.7	27.6	18.8	56.0	46.0	28.4	27.2

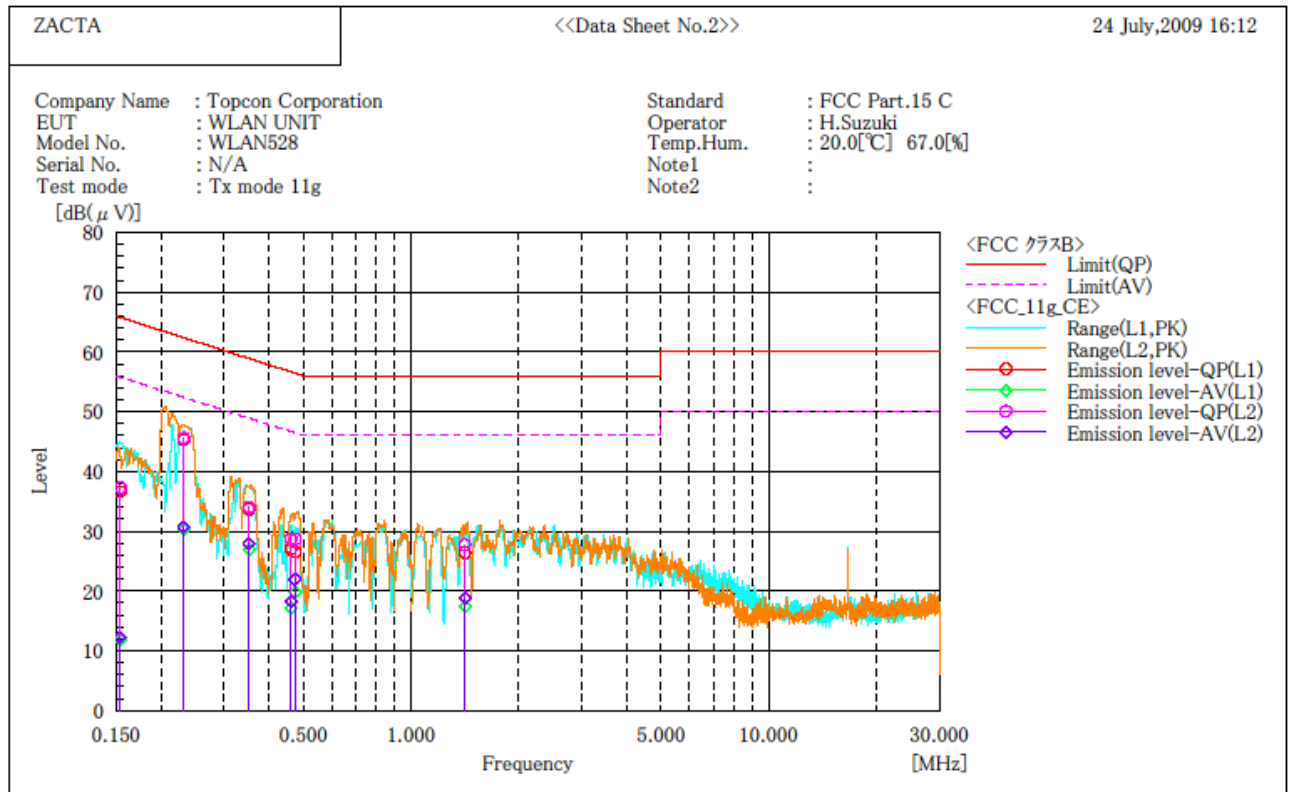

Final Result

--- L1 Phase ---

No.	Frequency [MHz]	Reading QP [dB(μV)]	Reading AV [dB(μV)]	c. f [dB]	Result QP [dB(μV)]	Result AV [dB(μV)]	Limit QP [dB(μV)]	Limit AV [dB(μV)]	Margin QP [dB]	Margin AV [dB]
1	0.154	25.5	0.8	11.1	36.6	11.9	65.8	55.8	29.2	43.9
2	0.232	34.8	19.7	10.5	45.3	30.2	62.4	52.4	17.1	22.2
3	0.353	23.8	17.0	9.9	33.7	26.9	58.9	48.9	25.2	22.0
4	0.462	17.3	7.4	9.7	27.0	17.1	56.7	46.7	29.7	29.6
5	0.475	16.9	10.1	9.7	26.6	19.8	56.4	46.4	29.8	26.6
6	1.415	16.7	7.7	9.7	26.4	17.4	56.0	46.0	29.6	28.6

--- L2 Phase ---

No.	Frequency [MHz]	Reading QP [dB(μV)]	Reading AV [dB(μV)]	c. f [dB]	Result QP [dB(μV)]	Result AV [dB(μV)]	Limit QP [dB(μV)]	Limit AV [dB(μV)]	Margin QP [dB]	Margin AV [dB]
1	0.154	26.2	1.1	11.1	37.3	12.2	65.8	55.8	28.5	43.6
2	0.232	35.1	20.2	10.5	45.6	30.7	62.4	52.4	16.8	21.7
3	0.353	24.1	18.0	9.9	34.0	27.9	58.9	48.9	24.9	21.0
4	0.462	19.0	8.6	9.7	28.7	18.3	56.7	46.7	28.0	28.4
5	0.475	18.9	12.2	9.7	28.6	21.9	56.4	46.4	27.8	24.5
6	1.415	18.0	9.1	9.7	27.7	18.8	56.0	46.0	28.3	27.2

4.9 Antenna requirement

According to FCC section 15.203., an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

The antenna is a pattern antenna mounted inside of the EUT. Therefore, the EUT complies with the antenna requirement of FCC section 15.203.

5. Uncertainty of measurement

Expanded uncertainties stated were calculated with a coverage Factor $k=2$.

Please note that these results are not taken into account when determining compliance or non-compliance with test result.

Test item	Measurement uncertainty
Conducted emission at mains port (150kHz – 30MHz)	$\pm 2.9\text{dB}$
Radiated emission (9kHz – 30MHz)	$\pm 4.4\text{dB}$
Radiated emission (30MHz – 1000MHz)	$\pm 5.2\text{dB}$
Radiated emission (1000MHz – 26GHz)	$\pm 3.6\text{dB}$

6. Laboratory description

6.1 Location: ZACTA Technology Corporation Yonezawa Testing Center
4149-7 Hachimanpara 5-chome Yonezawa-shi Yamagata 992-1128 Japan
Phone: +81-238-28-2880 Fax: +81-238-28-2888

6.2 Facility filing information:

1) NVLAP accreditation: NVLAP Lab. Code: 200306-0

2) FCC filing:

Site name	Registration Number	Expiry Date
Site 2, Site3	91065	November 16, 2011
3m Semi-anechoic chamber 10m Semi-anechoic chamber	540072	March 12, 2010

3) Industry Canada Oats site filing:

Site name	Sites on file: Oats 3m/10m	Expiry Date
Site 2	4224A-2	January 24, 2010
Site 3	4224A-3	January 24, 2010
3m Semi-anechoic chamber	4224A-4	January 24, 2010
10m Semi-anechoic chamber	4224A-5	January 24, 2010

4) VCCI site filing:

Site name	Radiated emission	Conducted Emission for mains port	Expiry Date	Conducted emission for telecom port	Expiry Date
Site 2	R-137	C-133	Nov. 16, 2011	T-1477	Oct. 8, 2011
Site 3	R-138	C-134	Nov. 16, 2011	T-1478	Oct. 8, 2011
10m Semi-anechoic chamber	R-2480	C-2722	Dec. 19, 2009	T-1474	Oct. 8, 2011
3m Semi-anechoic chamber	R-2481	C-2723	Dec. 19, 2009	T-1475	Oct. 8, 2011
Shielded room No.1	R-137	C-2724	Dec. 19, 2009	T-1476	Oct. 8, 2011

5) ETL SEMKO authorization:

Authorized as an EMC test laboratory.

6) TUV Rheinland authorization:

Authorized as an EMC test laboratory.

7) BUREAU VERITAS certification:

Certified as an EMC test laboratory.

Appendix A: Test equipment

List of Measuring Instruments

Equipment	Company	Model No.	Serial No.	Cal. Due	Cal. Date
Spectrum Analyzer (3Hz – 42.98GHz)	Agilent Technologies	E4447A	MY46180188	Feb. 2010	Feb. 27, 2009
Preamplifier (100kHz-1.2GHz)	ANRITSU	MH648A	M08067	Jun. 2010	Jun. 13, 2009
Preamplifier (1GHz-26.5GHz)	Agilent Technologies	8449B	3008A01008	Dec. 2009	Dec. 11, 2007
EMI Receiver	ROHDE&SCHWARZ	ESCI	100765	May. 2010	May. 27, 2009
Loop antenna	ROHDE&SCHWARZ	HFH2-Z2	891847/17	Feb.2010	Feb. 12, 2009
Coaxial cable	N/A	RG213	N/A	Feb. 2010	Feb. 12, 2009
TRILOG Antenna	Schwarzbeck	VULB9160	9160-3221	Apr. 2010	Apr. 13, 2009
Attenuator (6dB)	TDC	TAT-43B-06	N/A	Aug. 2009	Aug. 8, 2008
Double Ridged Guide Antenna	EMCO	3115	4328	Dec. 2010	Dec. 10, 2008
Broad-Band Horn Antenna	Schwarzbeck	BBHA9170	BBHA9170189	Mar. 2010	Mar. 23, 2008
Preamplifier	TSJ	MLA-1840-B03-35	1240332	Mar. 2010	Mar. 23, 2008
Microwave cable	SUHNER	SUCOFLEX 106	60929/6 (15m)	Nov. 2009	Nov. 12, 2008
	SUHNER	SUCOFLEX 106	60959/6 (1m)	Nov. 2009	Nov. 12, 2008
Coaxial cable	Fujikura	5D-2W/10m	#AEC3R-001	Feb. 2010	Feb. 5, 2009
		5D-2W/1.5m	#AEC3R-003	Feb. 2010	Feb. 5, 2009
		5D-2W/1m	#AEC3R-004	Feb. 2010	Feb. 5, 2009
		SUCOFLEX 106/7m	#AEC3R-002	Feb. 2010	Feb. 5, 2009
Microwave cable	SUHNER	SUCOFLEX104	199511/4	Nov. 2009	Nov. 12, 2008
Attenuator	Weinschel	56-10	J4180	Nov. 2009	Nov. 12, 2008
Line impedance stabilization network for EUT	Kyoritsu Electrical Works, Ltd.	KNW-407F	8-2003-1	Mar. 2010	Mar. 29, 2009
Line impedance stabilization network for EUT	Kyoritsu Electrical Works, Ltd.	KNW-242F	8-1973-1	Mar. 2010	Mar. 29, 2009
50Ω terminator	HRS	UG-88/U	N/A	Mar. 2010	Mar. 4, 2009
Transient limiter	Agilent Technologies	11947A	3107A03923	Jan. 2010	Jan. 7, 2009
Notch filter	Micro-Tronics	BRM50702	045	Sep. 2009	Sep. 8, 2008
PC	DELL	DIMENSION E521	85465BX	N/A	N/A
PC	IBM	6892-44J	97-43012	N/A	N/A
Software	TOYO Corporation	EP5/RE-AJ	0611193/V3.4	N/A	N/A
Site attenuation	ZACTA Technology	3m Semi-anechoic chamber	5192Z	May. 2010	May. 18, 2009

*The calibrations of the above equipment are traceable to NIST or equivalent standards of the reference organizations.