

# Measurement Report

**FCC ID:H8GRFKB23A**This report concerns (check one) : ☒ Original Grant ☐ Class II Change

**Issued Date** : May. 12, 2004  
**Project No.** : 04E0229  
**Equipment** : RF Keyboard  
**Model No.** : RFKBS-23A; RFKB-23A  
**Applicant** : A-FOUR TECH CO., LTD.  
6F, No. 108, Min-Chuan Rd.,  
Hsin-Tien, Taipei, Taiwan, R.O.C.

**Tested by :**  
Neutron Engineering Inc. EMC Laboratory  
**Data of Test :**  
Apr. 23, 2004 ~ May. 03, 2004

**Testing Engineer :****Technical Manager :****Authorized Signatory :**

*Carry Chen*  
*James Chiu*  
*(Andy Chiu)*

**NEUTRON ENGINEERING INC.****No. 132-1, Lane 329, Sec. 2, Palain Rd.,****Shijr Jen, Taipei, Taiwan****TEL : (02) 2646-5426 FAX : (02) 2646-6815**

## Declaration

**Neutron** represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (**NML**) of **R.O.C.**, or National Institute of Standards and Technology (**NIST**) of **U.S.A.**

**Neutron's** reports apply only to the specific samples tested under conditions. It is manufacture' s responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **Neutron** shall have no liability for any declarations , inferences or generalizations drawn by the client or others from **Neutron** issued reports.

**Neutron'** s reports must not be used by the client to claim product endorsement by the authorities or any agency of the Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **Neutron-self**, extracts from the test report shall not be reproduced except in full with **Neutron'** s authorized written approval.

**Neutron'** s laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

## Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

## Assessment Authorities



## Test Standard/Scope/Item Acceptance

FCC Part 15 Subpart B  
IEC/CISPR22  
AS/NZS CISPR 22  
CNS 13438

FCC Part 15 Subpart B  
CISPR 22/EN 55022  
AS/NZS CISPR 22  
VCCI -Technical Requirement  
CNS 13438  
SS IEC/CISPR 22  
IEC/EN 61000-3-2 IEC/EN 61000-4-5  
IEC/EN 61000-3-3 IEC/EN 61000-4-6  
IEC/EN 61000-4-2 IEC/EN 61000-4-8  
IEC/EN 61000-4-3 IEC/EN 61000-4-11  
IEC/EN 61000-4-4

**Table of Contents**

|                                                                     | <b>Page</b> |
|---------------------------------------------------------------------|-------------|
| <b>1 General Information</b>                                        | <b>5</b>    |
| 1.1 Applicant                                                       | 5           |
| 1.2 Manufacturer                                                    | 5           |
| 1.3 Equipment Under Tested                                          | 5           |
| 1.4 OEM Brand/Model                                                 | 5           |
| 1.5 Product Description                                             | 5           |
| 1.6 Connecting I/O Port(s)                                          | 5           |
| 1.7 Power Supplied                                                  | 5           |
| 1.8 Products Covered                                                | 6           |
| 1.9 Model Difference (Series, Versions, if any)                     | 6           |
| 1.10 EUT Modifications                                              | 6           |
| 1.11 Electric Block Diagram                                         | 6           |
| 1.12 Photos of EUT                                                  | 6           |
| <b>2 RFI Emissions Measurement</b>                                  | <b>7</b>    |
| 2.1 Test Facility                                                   | 7           |
| 2.2 Standard Compliance                                             | 7           |
| 2.3 Test Conditions and Channel                                     | 7           |
| 2.4 Test Methodology                                                | 7           |
| 2.5 Deviations from Standard Test Method                            | 7           |
| 2.6 Sample(s) Tested                                                | 8           |
| 2.7 Measurement Instrument                                          | 8           |
| 2.8 Measurement Uncertainty                                         | 8           |
| 2.9 Tested System Set-Up/Configuration Details                      | 8           |
| Table -1 Equipments Used in Tested System                           | 9           |
| Diagram -1 Block diagram showing the configuration of system tested | 10          |
| Table - 2 Equipments Used in Tested System                          | 11          |
| Table - 3 Information of Interface Cable                            | 11          |
| 2.10 Max.(Worst Case) RF Emission Evaluation                        | 12          |
| 2.11 EUT Operation                                                  | 12          |
| <b>3 Justification</b>                                              | <b>13</b>   |
| 3.1 Limitations                                                     | 13          |
| 3.1.1 Power Line Conducted Emission                                 | 13          |
| 3.1.2 Radiated Emission Limits                                      | 13          |
| 3.2 Measurement Justification                                       | 14          |
| 3.2.1 Conducted Emission                                            | 14          |
| 3.2.2 Radiated Emission                                             | 14          |
| 3.2.3 Field Strength Calculation                                    | 15          |
| 3.3 Measurement Data                                                | 15          |
| Table 4 Conducted Emission Data                                     | 15          |
| Table 5 Radiated Emission Data                                      | 15          |

| Table of Contents                       |  | Page |
|-----------------------------------------|--|------|
| <b>Attachment</b>                       |  | 19   |
| A. Electric Block Diagram               |  | 20   |
| B. EUT Modification Description         |  | 21   |
| C. EUT Test Photos                      |  | 22   |
| D. EUT Photos                           |  | 24   |
| E. User' s Manual                       |  | 29   |
| F. Product Labeling                     |  | 30   |
| G. Bandwidth Requirement                |  | 32   |
| H. Laboratory Accreditation Certificate |  | 35   |

**1. General Information****1.1 Applicant**

Name A-FOUR TECH CO., LTD.

Address 6F, No. 108, Min-Chuan Rd., Hsin-Tien, Taipei, Taiwan, R.O.C.

**1.2 Manufacturer**

Name N/A

Address N/A

**1.3 Equipment Under Tested**

Name: RF Keyboard

Trade Name: A4TECH

Model No.: RFKBS-23A; RFKB-23A

**1.4 OEM Brand/Model (if applicable)**

OEM Brand(s)/Model(s) except the basic model in sub-clause 1.3 is(are) the follows:

OEM Brand: N/A

Model No.: N/A

**1.5 Product Descriptions(Application/Features/Specification)**

The EUT is a RF Keyboard. A major technical descriptions of EUT is described as following:

|                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|--------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| A. Operation Frequency   | CH1:26.995 and CH2:27.195MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| B. Modulation Type       | FSK                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| C. Antenna Designation   | Integral                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| D. Number Of Channel     | 2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| E. Channel Spacing       | 100 KHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| F. Output Power          | -41.91dBm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| G. Operation Methodology | The EUT encoder generates a pulse code serially transmit (typical designation) into the modulator(or called as mixer) stage in circuit. This pulse signal mixed with the carrier at modulator(mixer) stage by way of FSK mode frequency modulation. The modulation depth is designed such as $\pm 5\text{KHz}$ in this application, that means the pulse(may be at high level state or low level state) will trigger the oscillator to generate a frequency at a specified fundamental frequency $+5\text{KHz}$ or $-5\text{KHz}$ , depended on the designation. For example, if the carrier frequency defined as fundamental frequency $+5\text{KHz}$ at high level state, then the alternative carrier frequency will be fundamental frequency $-5\text{KHz}$ at low level state. |

Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual (Attachment - E.)

**1.6 Connecting I/O Port(s)**

Please refer to the User's Manual ( Attachment - **E.**)

**1.7 Power Supplied**

Power Source: Battery supplied

Power Cord: N/A

Power Rating: DC 3 V

**1.8 Products Covered (if applicable)**

The sample tested including the following sub-system/module/accessory :

| Sub-system/ Module/ Accessory | Model/Type No. | Int. Inst./ Ext. Cont. |
|-------------------------------|----------------|------------------------|
| N/A                           | N/A            | N/A                    |

**1.9 Model Difference (Series, Versions, if any)**

Except the basic model no. (model designation of the sample tested in this test report), additional model no. covered is(are) :

Models RFKBS-23A, RFKB-23A designed based on similar electrical circuit but different aspect of enclosure.

**1.10 EUT Modifications (if applicable)**

No any modification required for the EUT to comply with the standards.

**1.11 Electric Block Diagram**

Please refer to the Attachment – **A.**

**1.12 Photos of EUT**

Please refer to the Attachment – **D.**

## 2. RFI Emissions Measurement

### 2.1 Test Facility

The test facilities used to collect the test data in this report located at No.132-1, Lane 329, Sec. 2, Palain Road, Shijr City, Taipei, Taiwan.

### 2.2 Standard Compliance

The test data contained in this report relate only to the item(s) listed below :

FCC Part15, Subpart C / ANCI C63.4 : 2000

The composite system (including receiver and transmitter) in compliance with Subpart B is authorized under a DOC procedure.

### 2.3 Test Conditions and Channel

| Test Channel (1) | EUT Channel | Test Frequency(MHz) |
|------------------|-------------|---------------------|
| 1                | CH 1        | 26.995              |
| 2                | CH 2        | 27.195              |
|                  |             |                     |

Note:

(1)The measurements are performed at the highest and lowest available channels with the modulation enabled.

### 2.4 Test Methodolog

Only radiated testing was performed during the max. EMI emission evaluation. Conducted testing excepted because of the EUT is a battery operating device and no any other cable connection to PC device.

Test procedures according to the technical standards : ( Antenna to EUT distance is 3 m)

| FCC Part15 (15.227), Subpart C |                   |                                        |                       |        |
|--------------------------------|-------------------|----------------------------------------|-----------------------|--------|
| Section                        | Test Item         | Limit                                  | Frequency Range (MHz) | Result |
| 15.209                         | Radiated Emission | Class B                                | 30-1000               | PASS   |
| 15.227                         | Radiated Emission | 10000 $\mu$ V/m (80dB $\mu$ V/m) @ 3 m | 26.96-27.28           | PASS   |

## 2.5 Deviations from Standard Test Method

N/A

## 2.6 Sample(s) Tested

The representative sample tested in this reports is(are): RFKBS-23A

Test results in this test report relate only to the sample(s) tested.

The EUT has been tested according to the following environmental condition:

|                   |       |
|-------------------|-------|
| Input Power       | DC:3V |
| Temperature       | 29    |
| Relative Humidity | 50 %  |

## 2.7 Measurement Instruments

Valid measurement instruments used in this report refer to **Table-1** enclosed.

## 2.8 Measurement Uncertainty

Measurement Uncertainty for a Level of Confidence of 95 % ,  $U=2 \times U_c(y)$

Radiated Emission Measurement  $\pm 2.47$  dB

Conducted Emission Measurement  $\pm 2.29$  dB

## 2.9 Tested System Set-Up/Configuration Details

The system was configured for testing in a typical fashion (as a user would normally use) or in-accordance with the operating configuration specified in the user's manual. A Block Diagram(please refer to the Diagram - 1) and Photos(please refer to the attachment - C) showing the set-up/configuration of system tested. In addition, **Table-2** and **Table-3** provide a detail of all equipment items and cables information used in the system tested.

**Table -1 Measurement Instruments List**


| Item | Instruments        | Mfr/Brand       | Model/Type No. | Serial No.                         | Calibrated Date | Next Cali. Date | Note |
|------|--------------------|-----------------|----------------|------------------------------------|-----------------|-----------------|------|
| 1    | LISN               | EMCO            | 3825/2         | 9605-2539                          | 2003-06-10      | 2004-06-09      | ✓    |
| 2    | LISN               | Rolf Heine      | NNB-2/16Z      | 98083                              | 2003-10-31      | 2004-10-30      |      |
| 3    | LISN               | Rolf Heine      | NNB-2/16Z      | 98053                              | 2003-12-15      | 2004-12-14      | ✓    |
| 4    | LISN               | EMCO            | 4825/2         | 00028234                           | 2003-10-01      | 2004-09-30      |      |
| 5    | Pulse Limiter      | Electro-Metrics | EM-7600        | 112644                             | 2003-12-08      | 2004-12-07      | ✓    |
| 6    | 50Ω Terminator     | N/A             | N/A            | N/A                                | 2003-05-09      | 2004-05-08      | ✓    |
| 7    | Test Cable         | N/A             | C01            | N/A                                | 2003-12-09      | 2004-12-08      | ✓    |
| 8    | Log-Bicon Antenna  | MESS-ELEKTRONIK | VULB 9160      | 3058                               | 2003-10-21      | 2004-10-20      |      |
| 9    | Log-Bicon Antenna  | MESS-ELEKTRONIK | VULB 9160      | 3060                               | 2003-10-21      | 2004-10-20      | ✓    |
| 10   | Log-Bicon Antenna  | MESS-ELEKTRONIK | VULB 9160      | 3115                               | 2004-04-14      | 2005-04-13      |      |
| 11   | Log-Bicon Antenna  | MESS-ELEKTRONIK | VULB 9161      | 4022                               | 2003-07-14      | 2004-07-13      |      |
| 12   | Test Cable         | N/A             | 10M_OS01       | N/A                                | 2003-12-09      | 2004-12-08      |      |
| 13   | Test Cable         | N/A             | OS01-1/-2      | N/A                                | 2003-12-09      | 2004-12-08      |      |
| 14   | Test Cable         | N/A             | 10M_OS02       | N/A                                | 2003-12-09      | 2004-12-08      | ✓    |
| 15   | Test Cable         | N/A             | OS02-1/-2/-3   | N/A                                | 2003-12-09      | 2004-12-08      | ✓    |
| 16   | RF Switch          | Anritsu         | MP59B          | M65982                             | 2003-12-08      | 2005-12-07      |      |
| 17   | Quasi-Peak Adapter | HP              | 85650A         | 2521A00844                         | 2004-03-16      | 2005-03-15      | ✓    |
| 18   | RF Pre-Selector    | HP              | 85685A         | 2648A00417                         | 2004-03-16      | 2005-03-15      | ✓    |
| 19   | Spectrum Analyzer  | HP              | 85680B         | 2634A03025                         | 2004-01-09      | 2005-01-08      | ✓    |
| 20   | Spectrum Monitor   | HP              | 85662B         | 2648A13616                         | 2004-01-09      | 2005-01-08      | ✓    |
| 21   | Pre-Amplifier      | Anritsu         | MH648A         | M09961                             | 2003-12-08      | 2004-12-07      | ✓    |
| 22   | Spectrum Analyzer  | ADVAN TEST      | R3261C         | 81720298                           | 2003-08-13      | 2004-08-12      |      |
| 23   | Test Receiver      | R&S             | ESH3           | 860156/018                         | 2003-10-21      | 2004-10-20      |      |
| 24   | Test Receiver      | R&S             | ESVP           | 860687/009                         | 2003-12-05      | 2004-12-04      |      |
| 25   | Test Receiver      | MEB             | SMV41          | 130                                | 2003-12-05      | 2004-12-04      |      |
| 26   | Test Receiver      | PMM             | PMM 9000       | 4310J01002                         | 2003-10-03      | 2004-10-02      | ✓    |
| 27   | Horn Antenna       | EMCO            | 3115           | 9605-4803                          | 2003-05-23      | 2004-05-22      |      |
| 28   | Test Receiver      | R&S             | ESMI           | 843977/005                         | 2004-01-12      | 2005-01-11      |      |
| 29   | Pre-Amplifier      | R&S             | ESMI-Z7        | 1045.5020.9801<br>(612.278 041 00) | 2003-05-19      | 2004-05-18      |      |
| 30   | Absorbing Clamp    | R&S             | MDS-21         | 841077/011                         | 2003-08-14      | 2004-08-13      |      |
| 31   | Voltage Probe      | R&S             | ESH2-Z3        | 841.800/023                        | 2003-08-26      | 2004-08-25      |      |
| 32   | Signal Generator   | HP              | 8648A          | 3426A01034                         | 2002-10-11      | 2004-10-08      |      |
| 33   | Antenna Mast       | Chance Most     | CMTB-1.5       | N/A                                | N/A             | N/A             | ✓    |
| 34   | Turn Table         | Chance Most     | CMTB-1.5       | N/A                                | N/A             | N/A             | ✓    |

Remark :

(1)" ✓" indicates the instrument used in Test Report.

(2)" N/A" denotes No Model No. / Serial No. and No Calibration specified.

**Diagram - 1**  
**Block diagram showing the configuration of system tested**



**Table - 2 Equipments Used in Tested System**

| Item | Equipment   | Mfr/Brand | Model/Type No. | FCC ID     | Series No. | Note |
|------|-------------|-----------|----------------|------------|------------|------|
| E-1  | RF Keyboard | A4TECH    | RFKBS-23A      | H8GRFKB23A | N/A        | EUT  |
|      |             |           |                |            |            |      |
|      |             |           |                |            |            |      |
|      |             |           |                |            |            |      |
|      |             |           |                |            |            |      |
|      |             |           |                |            |            |      |
|      |             |           |                |            |            |      |
|      |             |           |                |            |            |      |
|      |             |           |                |            |            |      |
|      |             |           |                |            |            |      |
|      |             |           |                |            |            |      |
|      |             |           |                |            |            |      |
|      |             |           |                |            |            |      |
|      |             |           |                |            |            |      |
|      |             |           |                |            |            |      |
|      |             |           |                |            |            |      |
|      |             |           |                |            |            |      |
|      |             |           |                |            |            |      |
|      |             |           |                |            |            |      |

Note:

- (1) Unless otherwise denoted as EUT in 『Remark』 column , device(s) used in tested system is a support equipment.
- (2) Unless otherwise marked as in 『Remark』 column, Neutron consigns the support equipment to the tested system.
- (3) The support equipment was authorized by Declaration of Confirmation.

**Table - 3 Information of Interface Cable**

| Item | Shielded Type | Ferrite Core | Length | Note |
|------|---------------|--------------|--------|------|
|      | N/A           | N/A          | N/A    |      |
|      |               |              |        |      |
|      |               |              |        |      |
|      |               |              |        |      |
|      |               |              |        |      |
|      |               |              |        |      |
|      |               |              |        |      |
|      |               |              |        |      |
|      |               |              |        |      |
|      |               |              |        |      |
|      |               |              |        |      |
|      |               |              |        |      |
|      |               |              |        |      |
|      |               |              |        |      |
|      |               |              |        |      |
|      |               |              |        |      |
|      |               |              |        |      |
|      |               |              |        |      |

Note:

- (1) Unless otherwise marked as in 『Remark』 column, Neutron consigns the support equipment to the tested system.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

## 2.10 Max.(Worst Case) RF Emission Evaluation

- (a) Only radiated testing was performed during the max. EMI emission evaluation. Conducted testing excepted because of the EUT is a battery operating device and no any other cable connection to PC device.
- (b) The EUT was configured for testing in a typical fashion (as a customer would normally use it). We put wireless mouse on the DC fan, and then it's ball can roll automatically, which means wireless mouse can move automatically. The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

## 2.11 EUT Operation

The EUT exercise program used during radiated and emission measurement was designed to exercise the various system components in a manner similar to a typical use. The measurements are performed at the highest and lowest available channels with the modulation enabled.

### 3. Justification

#### 3.1 Limitations

##### 3.1.1 Power Line Conducted Emission

| Measurement<br>Frequency<br>Range<br>(MHz) | Mains Terminal<br>Class A Limits<br>(dBuV) |         | Mains Terminals<br>Class B Limits<br>(dBuV) |           | Note<br>CISPR<br>FCC<br>Std. |
|--------------------------------------------|--------------------------------------------|---------|---------------------------------------------|-----------|------------------------------|
|                                            | QP Mode                                    | AV Mode | QP Mode                                     | AV Mode   |                              |
|                                            |                                            |         |                                             |           |                              |
| 0.15 - 0.50                                | 79.00                                      | 66.00   | 66 - 56 *                                   | 56 - 46 * | CISPR                        |
| 0.50 - 5.00                                | 73.00                                      | 60.00   | 56.00                                       | 46.00     | CISPR                        |
| 5.00 - 30.0                                | 73.00                                      | 60.00   | 60.00                                       | 50.00     | CISPR                        |
| 0.45-1.705                                 | 60.00                                      | N/A     | 48.00                                       | N/A       | FCC                          |
| 1.705-30.0                                 | 69.50                                      | N/A     | 48.00                                       | N/A       | FCC                          |

Notes:

- (1). The tighter limit applies at the band edges.
- (2). The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

##### 3.1.2 Radiated Emission Limits (Frequency Range 30MHz-1000MHz)

| Measurement<br>Frequency<br>Range<br>(MHz) | Quasi-Peak Mode<br>Class A Limits<br>(dBuV/m) |       | Quasi-Peak Mode<br>Class B Limits<br>(dBuV/m) |       | Note<br>CISPR<br>FCC<br>Std. |
|--------------------------------------------|-----------------------------------------------|-------|-----------------------------------------------|-------|------------------------------|
|                                            | 10m                                           | 30m   | 10m                                           | 3m    |                              |
|                                            |                                               |       |                                               |       |                              |
| 30.00 -230.00                              | 40.00                                         | 30.00 | 30.00                                         | 40.00 | CISPR                        |
| 230.0 -1000.0                              | 47.00                                         | 37.00 | 37.00                                         | 47.00 | CISPR                        |
| 30.00 - 88.00                              | 39.00                                         | N/A   | 30.00                                         | 40.00 | FCC                          |
| 88.00 - 216.0                              | 43.50                                         | N/A   | 33.50                                         | 43.50 | FCC                          |
| 216.0 -960.0                               | 46.00                                         | N/A   | 36.00                                         | 46.00 | FCC                          |
| above 960.0                                | 49.50                                         | N/A   | 46.00                                         | 54.00 | FCC                          |

Notes:

- (1). The tighter limit applies at the band edges.
- (2). Emission level (dBuV/m)=20log Emission level (uV/m).
- (3). A measuring distance Of 10m is a primary used. However, either 3m or 10m (instead of 10m) distance my be allowed. If the distance is 3m, add 10dB to the QP-limit above. If the distance is 10m, subtract 10dB from the QP-limit above.

### 3.2 Measurement Justification

#### 3.2.1 Conducted Emission

The EUT is placed on a table which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4-1992. Conducted emissions from the EUT measured in the **frequency range between 0.15 MHz and 30MHz** were made with a **Spectrum Analyzer** using **CISPR Quasi-Peak detector mode**.

The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and these signals are then Quasi Peak detector mode and/or Average detector mode re-measured.

Data of **Table - 4** lists the significant emission frequencies, measured levels, limits and safe margins. All readings are Peak Mode measured unless otherwise stated as QP or AV in column of " Remark ".

If the Peak Mode measured value lower than both QP Mode and AV Mode Limit, EUT shall be deemed to compliance with both QP & AV Limits and then no additional QP Mode or AV Mode measurement performed.

If additional QP or AV Mode measurement needed, and if the QP Mode measured value compliance with the QP Mode Limit and lower than AV Mode Limit, the EUT shall be deemed to meet both QP & AV Limits and then only QP Mode was measured, but AV Mode was not performed.

#### 3.2.2 Radiated Emission

The EUT is placed on a turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter(EUT) was rotated through three orthogonal axes according to the requirements in Section 13.1.4.1 of ANSI C63.4-1992.

The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak, Peak or Average detector mode re-measured.

Data of **Table - 5** lists the significant emission frequencies, measured levels, limits and safe margins. All readings are Peak Mode measured unless otherwise stated as QP or AV in column of " Remark ".

If the Peak Mode measured value compliance with and lower than Quasi Peak or Average Mode Limit, the EUT shall be deemed to meet QP/AV Limits and then no additional QP/AV Mode measurement performed.

### 3.2.3 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as **FS = RA + AF + CL - AG**

Where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor (1)

CL = Cable Attenuation Factor(Cable Loss) (1)

AG = Amplifier Gain (1)

Remark :


(1) The Correction Factor = AF + CL - AG, as shown in the data tables' Correction Factor column.

### 3.3 Measurement Data


Table - 4. Conducted Emission Data (0.15-30MHz) – Not Applicable

Table - 5. Radiated Emission Data (30-1000MHz)

## (A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

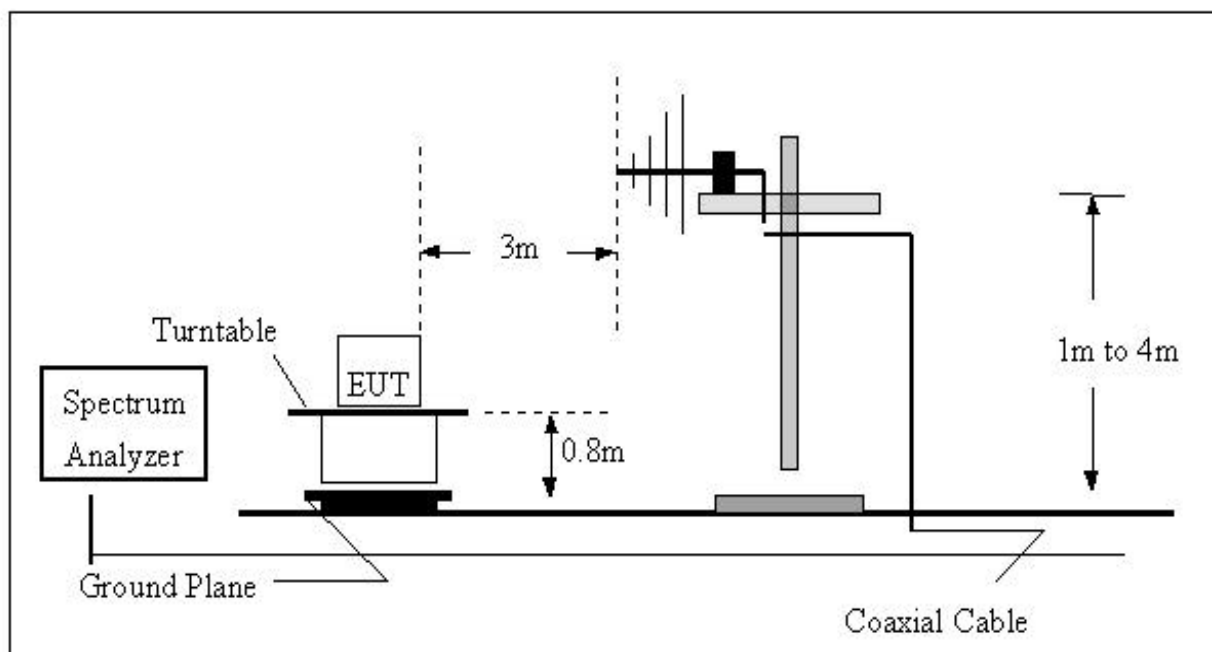

## (B) Radiated Emission Test Set-UP Frequency Over 1 GHz

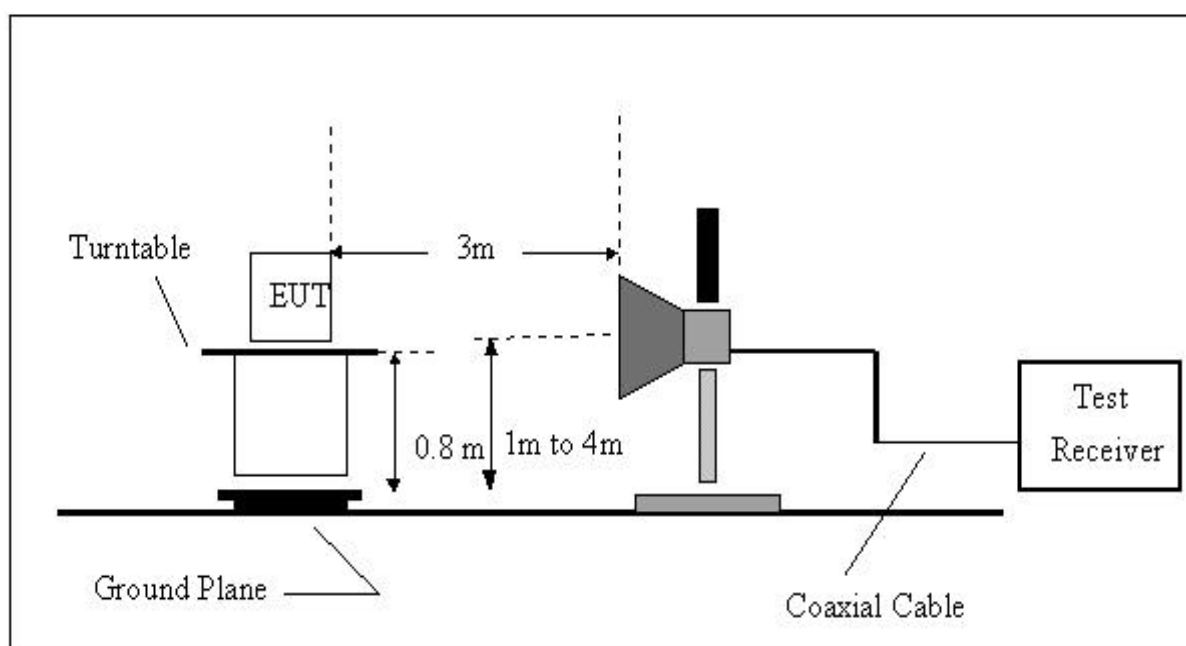

**Table 5 Radiated Emission Data (30-1000MHz)**

Special Notes : (EUT Operation Mode or Test Configuration Mode, if applicable)

CH1

| Freq.<br>(MHz) | Ant.Pol.<br>H/V | DetectorMode<br>(PK/AV) | Reading<br>(dBuV) | Ant./CL/<br>Amp. CF(dB) | Actual FS<br>(dBuV/m) | Limit3m<br>(dBuV/m) | Safe Margin<br>(dB) | Note |
|----------------|-----------------|-------------------------|-------------------|-------------------------|-----------------------|---------------------|---------------------|------|
| 26.995         | V               | Peak                    | 57.30             | -13.51                  | 43.79                 | 80.00               | -36.21              | F    |
| 26.960         | V               | Peak                    | 26.30             | -13.51                  | 12.79                 | 69.50               | -56.71              | E    |
| 27.280         | V               | Peak                    | 5.10              | -13.47                  | -8.37                 | 69.50               | -77.87              | E    |
| 53.990         | V               | Peak                    | 39.20             | -12.26                  | 26.94                 | 40.00               | -13.06              | H    |
| 80.985         | V               | Peak                    | 44.60             | -15.87                  | 28.73                 | 40.00               | -11.27              | H    |
| 107.980        | V               | Peak                    | 44.90             | -13.11                  | 31.79                 | 43.50               | -11.71              | H    |
| 134.975        | V               | Peak                    | 39.90             | -10.91                  | 28.99                 | 43.50               | -14.51              | H    |
| 161.970        | V               | Peak                    | 31.00             | -10.38                  | 20.62                 | 43.50               | -22.88              | H    |
| 26.995         | H               | Peak                    | 65.80             | -13.51                  | 52.29                 | 80.00               | -27.71              | F    |
| 26.960         | H               | Peak                    | 30.50             | -13.51                  | 16.99                 | 69.50               | -52.51              | E    |
| 27.280         | H               | Peak                    | 11.30             | -13.47                  | -2.17                 | 69.50               | -71.67              | E    |
| 53.990         | H               | Peak                    | 36.10             | -12.26                  | 23.84                 | 40.00               | -16.16              | H    |
| 80.985         | H               | Peak                    | 37.60             | -15.87                  | 21.73                 | 40.00               | -18.27              | H    |
| 107.980        | H               | Peak                    | 45.40             | -13.11                  | 32.29                 | 43.50               | -11.21              | H    |
| 134.975        | H               | Peak                    | 41.70             | -10.91                  | 30.79                 | 43.50               | -12.71              | H    |
| 161.970        | H               | Peak                    | 36.80             | -10.38                  | 26.42                 | 43.50               | -17.08              | H    |

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms.  
1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = 200 ms
- (2) All readings are Peak unless otherwise stated QP in column of 'Note' . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (3) Measuring frequency range from 25MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; " H" denotes spurious frequency. "E" denotes band edge frequency.
- (4) Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Peak detector mode or QP detector mode of the emission .
- (5) Data of measurement within this frequency range shown " - " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

**Table 5 Radiated Emission Data (30-1000MHz)**

Special Notes : (EUT Operation Mode or Test Configuration Mode, if applicable)

CH2

| Freq.<br>(MHz) | Ant.Pol.<br>H/V | DetectorMode<br>(PK/AV) | Reading<br>(dBuV) | Ant./CL/<br>Amp. CF(dB) | Actual FS<br>(dBuV/m) | Limit3m<br>(dBuV/m) | Safe Margin<br>(dB) | Note |
|----------------|-----------------|-------------------------|-------------------|-------------------------|-----------------------|---------------------|---------------------|------|
| 27.195         | V               | Peak                    | 58.30             | -13.48                  | 44.82                 | 80.00               | -35.18              | F    |
| 26.960         | V               | Peak                    | 16.80             | -13.51                  | 3.29                  | 69.50               | -66.21              | E    |
| 27.280         | V               | Peak                    | 8.40              | -13.47                  | -5.07                 | 69.50               | -74.57              | E    |
| 54.390         | V               | Peak                    | 40.90             | -12.16                  | 28.74                 | 40.00               | -11.26              | H    |
| 81.585         | V               | Peak                    | 41.20             | -15.91                  | 25.29                 | 40.00               | -14.71              | H    |
| 108.780        | V               | Peak                    | 48.30             | -13.41                  | 34.89                 | 43.50               | -8.61               | H    |
| 135.975        | V               | Peak                    | 44.50             | -11.15                  | 33.35                 | 43.50               | -10.15              | H    |
| 163.170        | V               | Peak                    | 41.60             | -10.07                  | 31.53                 | 43.50               | -11.97              | H    |
| 27.195         | H               | Peak                    | 66.70             | -13.48                  | 53.22                 | 80.00               | -26.78              | F    |
| 26.960         | H               | Peak                    | 16.10             | -13.51                  | 2.59                  | 69.50               | -66.91              | E    |
| 27.280         | H               | Peak                    | 23.90             | -13.47                  | 10.43                 | 69.50               | -59.07              | E    |
| 54.390         | H               | Peak                    | 44.00             | -12.16                  | 31.84                 | 40.00               | -8.16               | H    |
| 81.585         | H               | Peak                    | 38.50             | -15.91                  | 22.59                 | 40.00               | -17.41              | H    |
| 108.780        | H               | Peak                    | 46.30             | -13.41                  | 32.89                 | 43.50               | -10.61              | H    |
| 135.975        | H               | Peak                    | 33.60             | -11.15                  | 22.45                 | 43.50               | -21.05              | H    |
| 163.170        | H               | Peak                    | 36.00             | -10.07                  | 25.93                 | 43.50               | -17.57              | H    |

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms.  
1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = 200 ms
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (3) Measuring frequency range from 25MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- (4) Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Peak detector mode or QP detector mode of the emission .
- (5) Data of measurement within this frequency range shown " - " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

## **Attachment**

### **Table Contents**

---

- A. Electric Block Diagram
- B. EUT Modification Description
- C. EUT Photos
- D. EUT Test Photos
- E. User' s Manual
- F. Product Labeling
- G. Bandwidth Requirement (Plot)
- H. Laboratory Accreditation Certificate

**Attachment - A.**

**Electric Block Diagram**

**Attachment - B.**

**EUT Modification Description**

**Attachment - C.**

**EUT Test Photos**

## **Attachment – D**

### **EUT Photos**

- 1. Photo # 1 Front View/ Rear View**
- 2. Photo # 2 Unit Partially Disassembled**
- 3. Photo # 3 Unit Partially Disassembled**
- 4. Photo # 4 Unit Partially Disassembled**

## **Attachment – E**

### **User' s Manual**

## **Attachment - F**

### **Product Labeling**

## **Attachment - G.**

### **Bandwidth Requirement**

## **Attachment - H.**

### **Laboratory Accreditation Certificate**