


|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Site: AC1                                              | Time: 2019/08/02 - 20:07 |
| Limit: FCC_Part15.209_RE(3m)                           | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                               | Polarity: Vertical       |
| EUT: WIFI+BT Combo Module                              | Power: AC120V/60Hz       |
| Test Mode: Transmit by 802.11n-HT20 at channel 5700MHz |                          |

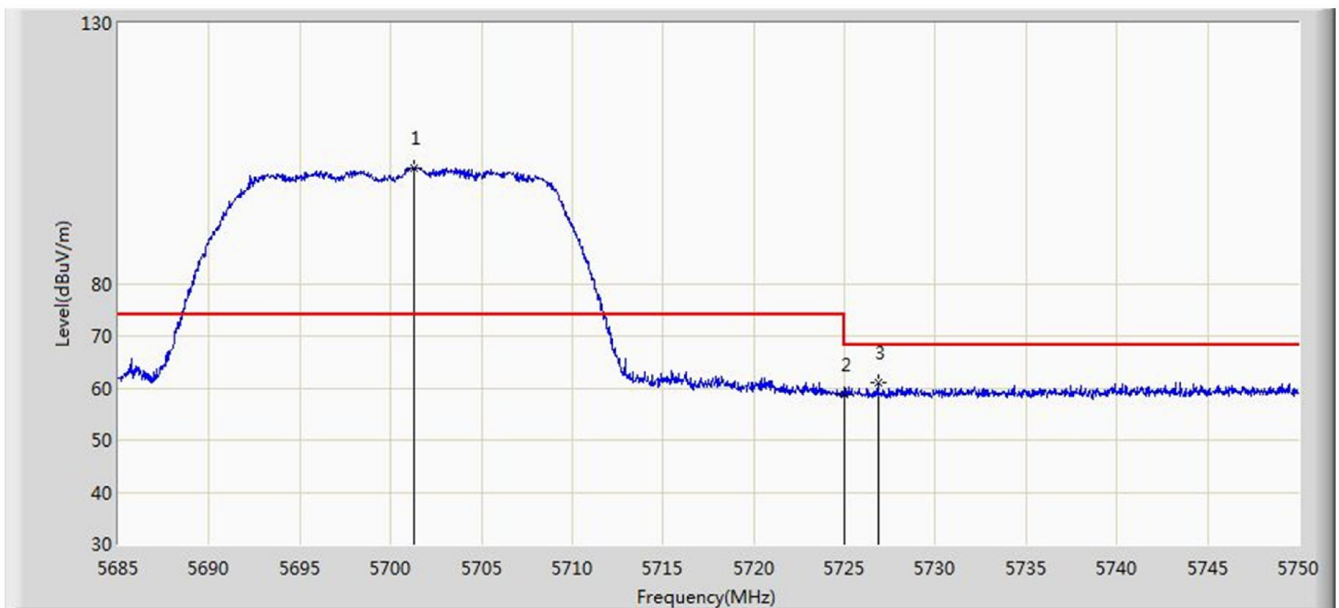


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5701.315        | 102.283                | 95.365               | N/A         | N/A            | 6.919       | PK   |
| 2  |      |      | 5725.000        | 58.779                 | 51.912               | -9.421      | 68.200         | 6.867       | PK   |
| 3  |      |      | 5726.828        | 60.977                 | 54.112               | -7.223      | 68.200         | 6.866       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Site: AC1                                              | Time: 2019/08/02 - 20:10 |
| Limit: FCC_Part15.407_RE(3m)                           | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                               | Polarity: Horizontal     |
| EUT: WIFI+BT Combo Module                              | Power: AC120V/60Hz       |
| Test Mode: Transmit by 802.11n-HT20 at channel 5745MHz |                          |

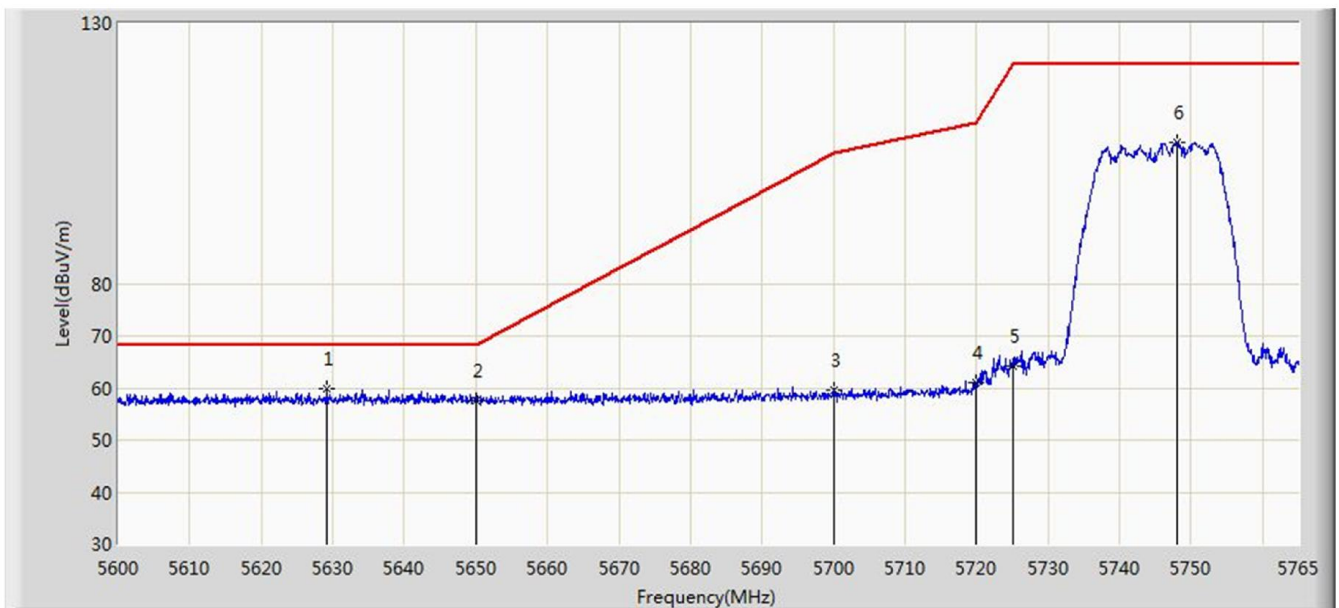


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5629.205        | 59.891                 | 53.135               | -8.309      | 68.200         | 6.755       | PK   |
| 2  |      |      | 5650.000        | 57.572                 | 50.779               | -10.628     | 68.200         | 6.793       | PK   |
| 3  |      |      | 5700.000        | 59.577                 | 52.668               | -45.623     | 105.200        | 6.909       | PK   |
| 4  |      |      | 5720.000        | 60.981                 | 54.077               | -49.819     | 110.800        | 6.904       | PK   |
| 5  |      |      | 5725.000        | 64.177                 | 57.310               | -58.023     | 122.200        | 6.867       | PK   |
| 6  |      |      | 5748.005        | 107.220                | 100.183              | N/A         | N/A            | 7.036       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Site: AC1                                              | Time: 2019/08/02 - 20:11 |
| Limit: FCC_Part15.407_RE(3m)                           | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                               | Polarity: Vertical       |
| EUT: WIFI+BT Combo Module                              | Power: AC120V/60Hz       |
| Test Mode: Transmit by 802.11n-HT20 at channel 5745MHz |                          |

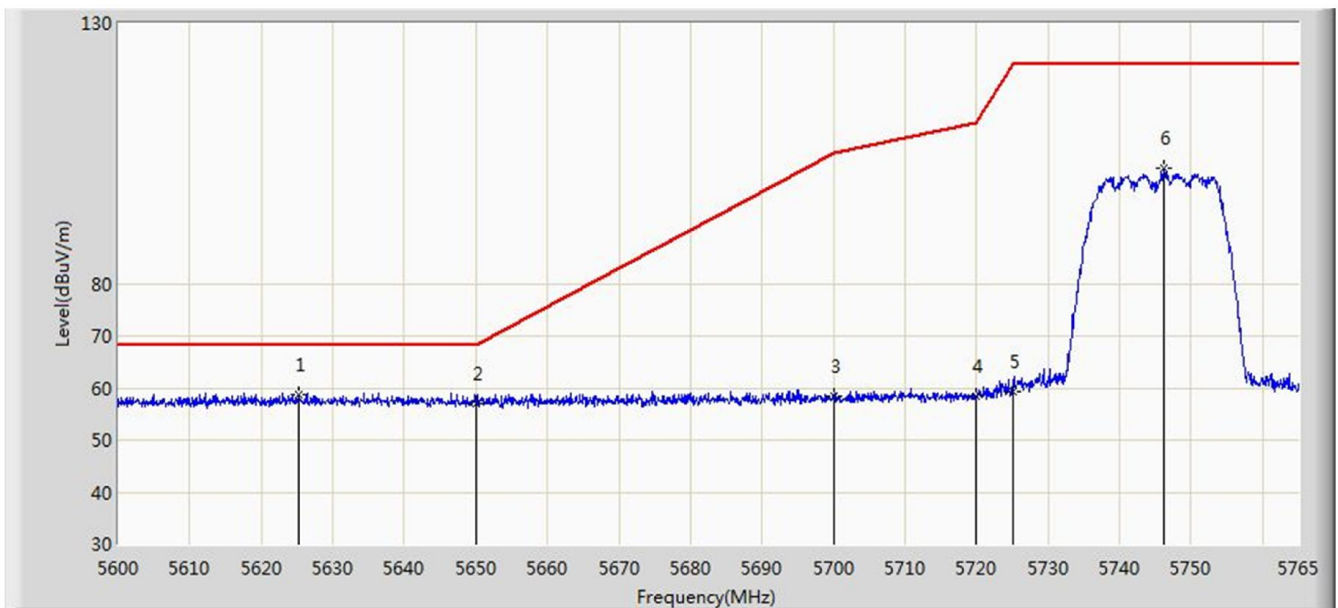


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5625.245        | 58.731                 | 52.001               | -9.469      | 68.200         | 6.730       | PK   |
| 2  |      |      | 5650.000        | 56.916                 | 50.123               | -11.284     | 68.200         | 6.793       | PK   |
| 3  |      |      | 5700.000        | 58.483                 | 51.574               | -46.717     | 105.200        | 6.909       | PK   |
| 4  |      |      | 5720.000        | 58.342                 | 51.438               | -52.458     | 110.800        | 6.904       | PK   |
| 5  |      |      | 5725.000        | 59.409                 | 52.542               | -62.791     | 122.200        | 6.867       | PK   |
| 6  |      |      | 5746.273        | 102.231                | 95.216               | N/A         | N/A            | 7.015       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Site: AC1                                              | Time: 2019/08/02 - 20:13 |
| Limit: FCC_Part15.407_RE(3m)                           | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                               | Polarity: Horizontal     |
| EUT: WIFI+BT Combo Module                              | Power: AC120V/60Hz       |
| Test Mode: Transmit by 802.11n-HT20 at channel 5825MHz |                          |

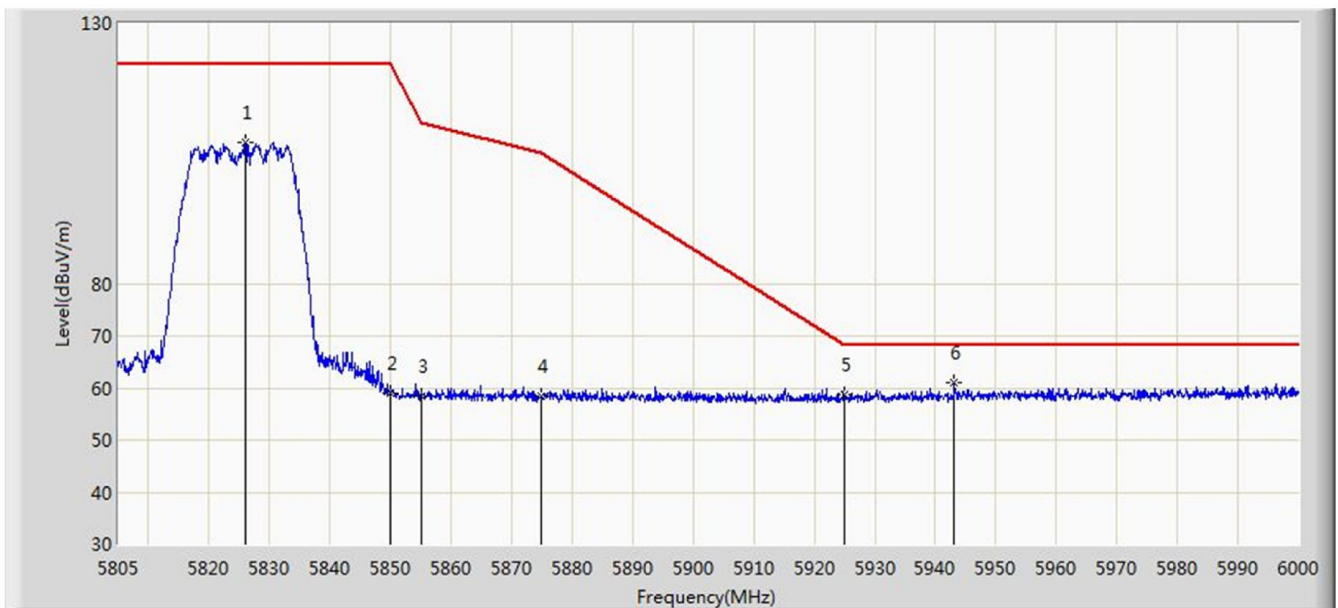


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5825.962        | 106.991                | 99.636               | N/A         | N/A            | 7.354       | PK   |
| 2  |      |      | 5850.000        | 59.014                 | 51.684               | -63.186     | 122.200        | 7.331       | PK   |
| 3  |      |      | 5855.000        | 58.353                 | 51.025               | -52.447     | 110.800        | 7.327       | PK   |
| 4  |      |      | 5875.000        | 58.365                 | 50.951               | -46.835     | 105.200        | 7.414       | PK   |
| 5  |      |      | 5925.000        | 58.752                 | 51.452               | -9.448      | 68.200         | 7.299       | PK   |
| 6  |      | *    | 5943.158        | 61.031                 | 53.571               | -7.169      | 68.200         | 7.460       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Site: AC1                                              | Time: 2019/08/02 - 20:14 |
| Limit: FCC_Part15.407_RE(3m)                           | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                               | Polarity: Vertical       |
| EUT: WIFI+BT Combo Module                              | Power: AC120V/60Hz       |
| Test Mode: Transmit by 802.11n-HT20 at channel 5825MHz |                          |

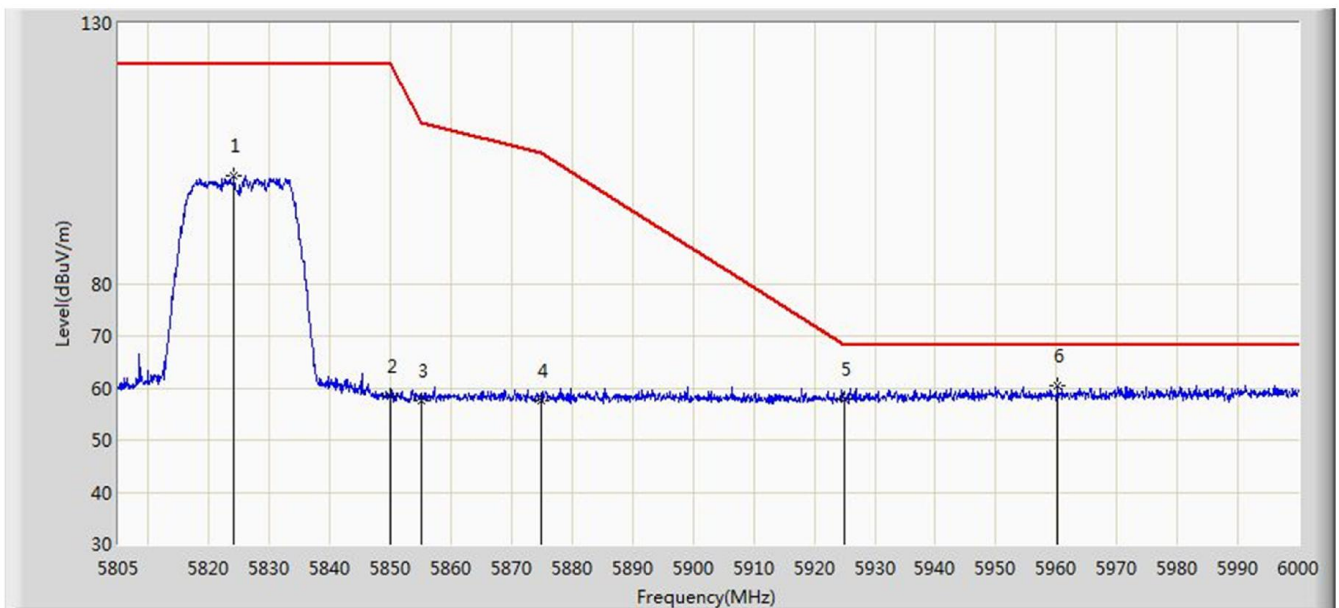


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5824.110        | 100.756                | 93.429               | N/A         | N/A            | 7.327       | PK   |
| 2  |      |      | 5850.000        | 58.430                 | 51.100               | -63.770     | 122.200        | 7.331       | PK   |
| 3  |      |      | 5855.000        | 57.651                 | 50.323               | -53.149     | 110.800        | 7.327       | PK   |
| 4  |      |      | 5875.000        | 57.657                 | 50.243               | -47.543     | 105.200        | 7.414       | PK   |
| 5  |      |      | 5925.000        | 57.761                 | 50.461               | -10.439     | 68.200         | 7.299       | PK   |
| 6  |      | *    | 5960.220        | 60.379                 | 52.964               | -7.821      | 68.200         | 7.415       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Site: AC1                                              | Time: 2019/08/02 - 20:16 |
| Limit: FCC_Part15.209_RE(3m)                           | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                               | Polarity: Horizontal     |
| EUT: WIFI+BT Combo Module                              | Power: AC120V/60Hz       |
| Test Mode: Transmit by 802.11n-HT40 at channel 5190MHz |                          |

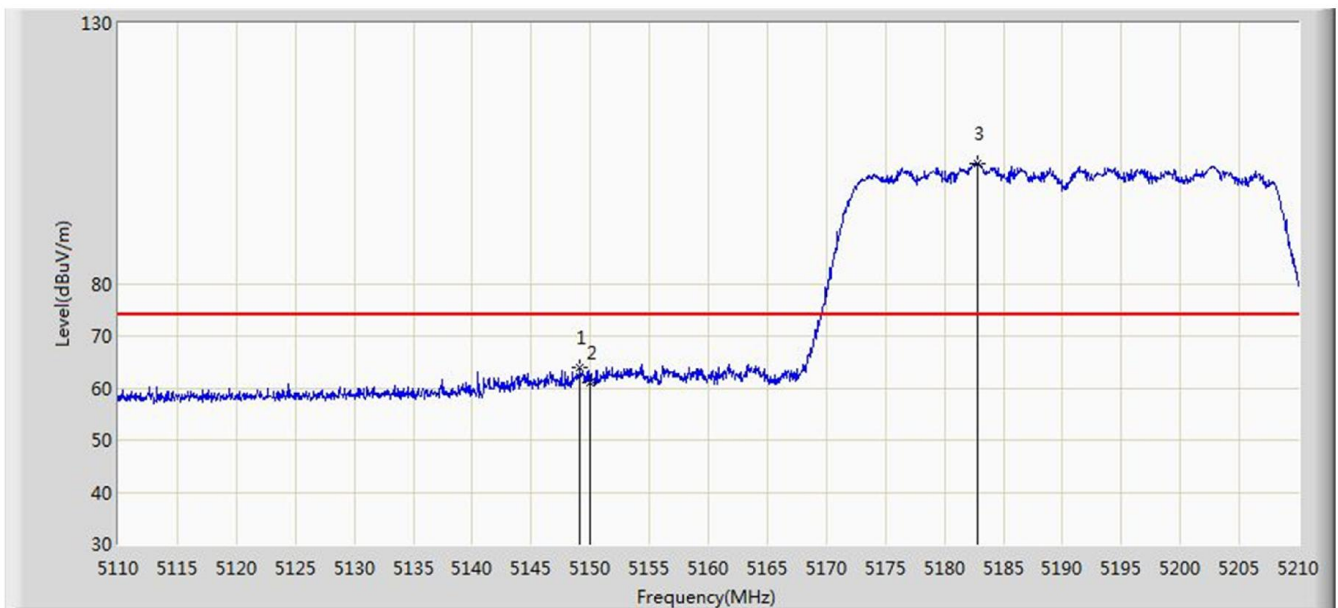


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5149.100        | 63.874                 | 57.480               | -10.126     | 74.000         | 6.394       | PK   |
| 2  |      |      | 5150.000        | 60.881                 | 54.484               | -13.119     | 74.000         | 6.398       | PK   |
| 3  |      | *    | 5182.800        | 103.141                | 96.560               | N/A         | N/A            | 6.581       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Site: AC1                                              | Time: 2019/08/02 - 20:18 |
| Limit: FCC_Part15.209_RE(3m)                           | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                               | Polarity: Horizontal     |
| EUT: WIFI+BT Combo Module                              | Power: AC120V/60Hz       |
| Test Mode: Transmit by 802.11n-HT40 at channel 5190MHz |                          |

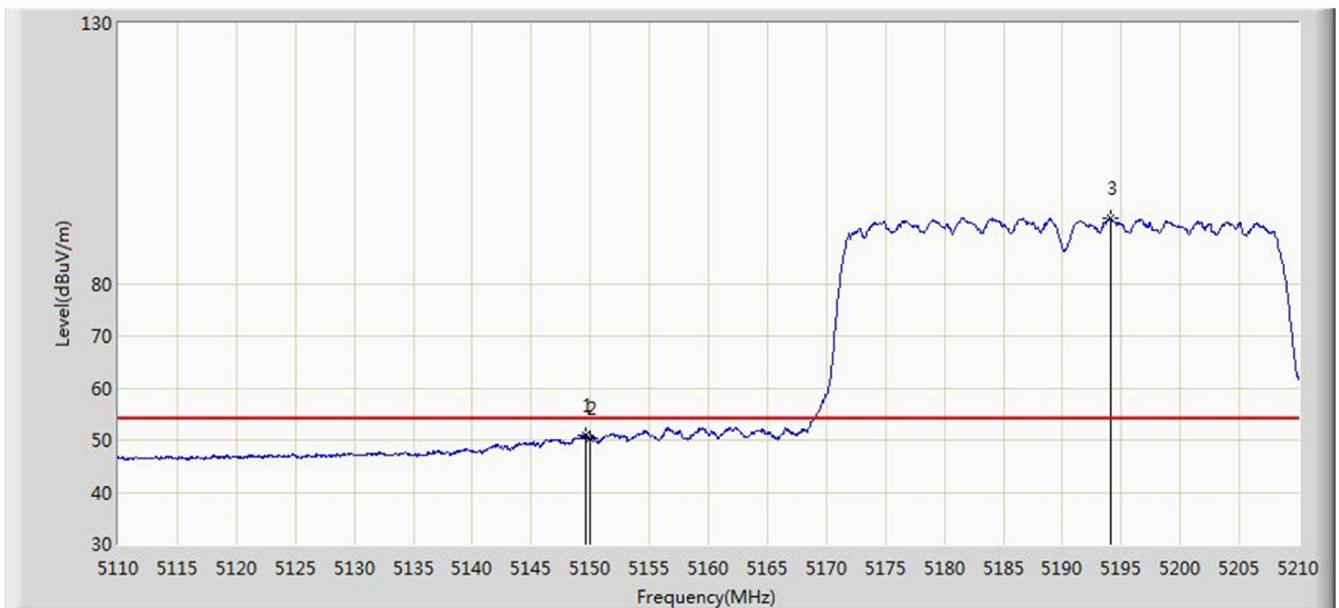


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5149.550        | 50.991                 | 44.595               | -3.009      | 54.000         | 6.396       | AV   |
| 2  |      |      | 5150.000        | 50.263                 | 43.866               | -3.737      | 54.000         | 6.398       | AV   |
| 3  |      | *    | 5194.050        | 92.623                 | 86.152               | N/A         | N/A            | 6.472       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Site: AC1                                              | Time: 2019/08/02 - 20:19 |
| Limit: FCC_Part15.209_RE(3m)                           | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                               | Polarity: Vertical       |
| EUT: WIFI+BT Combo Module                              | Power: AC120V/60Hz       |
| Test Mode: Transmit by 802.11n-HT40 at channel 5190MHz |                          |

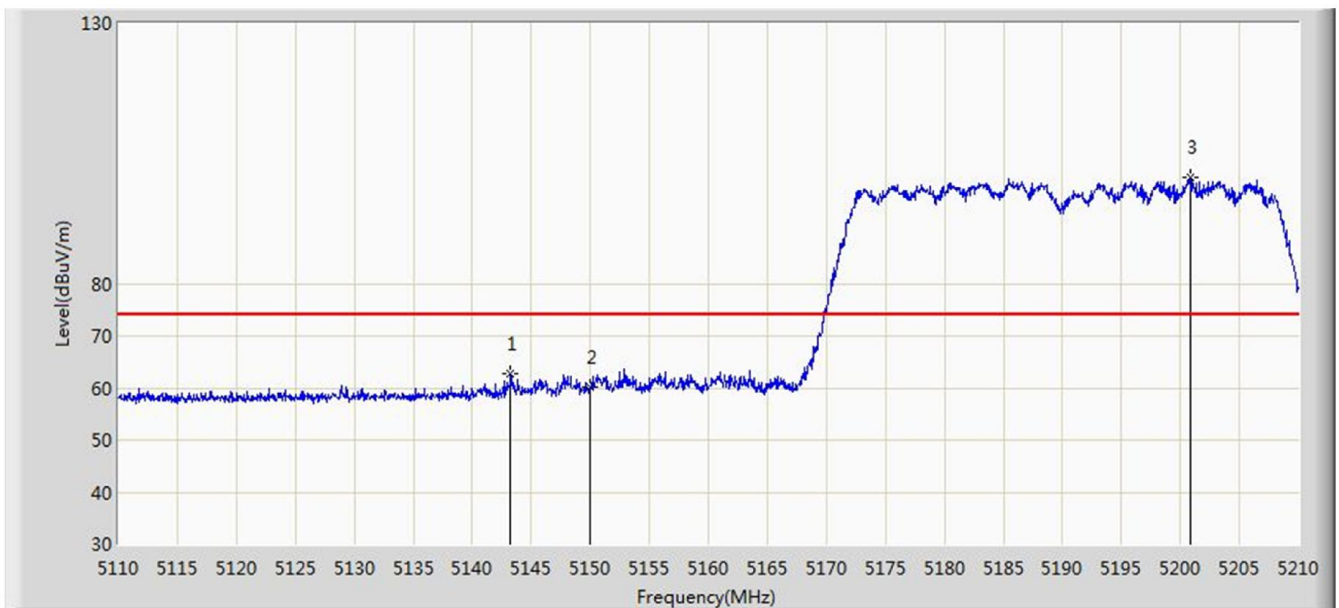


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5143.200        | 62.717                 | 56.254               | -11.283     | 74.000         | 6.463       | PK   |
| 2  |      |      | 5150.000        | 60.118                 | 53.721               | -13.882     | 74.000         | 6.398       | PK   |
| 3  |      | *    | 5200.850        | 100.520                | 94.124               | N/A         | N/A            | 6.397       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Site: AC1                                              | Time: 2019/08/02 - 20:20 |
| Limit: FCC_Part15.209_RE(3m)                           | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                               | Polarity: Vertical       |
| EUT: WIFI+BT Combo Module                              | Power: AC120V/60Hz       |
| Test Mode: Transmit by 802.11n-HT40 at channel 5190MHz |                          |

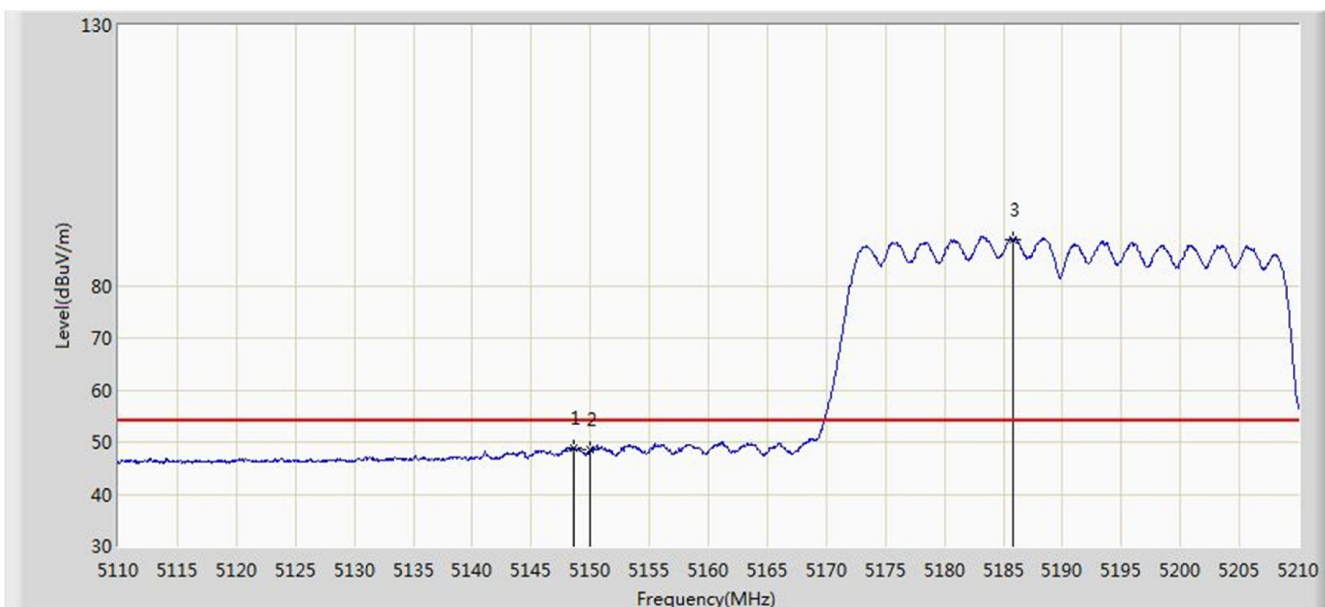


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5148.650        | 48.927                 | 42.534               | -5.073      | 54.000         | 6.393       | AV   |
| 2  |      |      | 5150.000        | 48.625                 | 42.228               | -5.375      | 54.000         | 6.398       | AV   |
| 3  |      | *    | 5185.800        | 88.890                 | 82.338               | N/A         | N/A            | 6.551       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Site: AC1                                              | Time: 2019/08/02 - 20:21 |
| Limit: FCC_Part15.209_RE(3m)                           | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                               | Polarity: Horizontal     |
| EUT: WIFI+BT Combo Module                              | Power: AC120V/60Hz       |
| Test Mode: Transmit by 802.11n-HT40 at channel 5310MHz |                          |

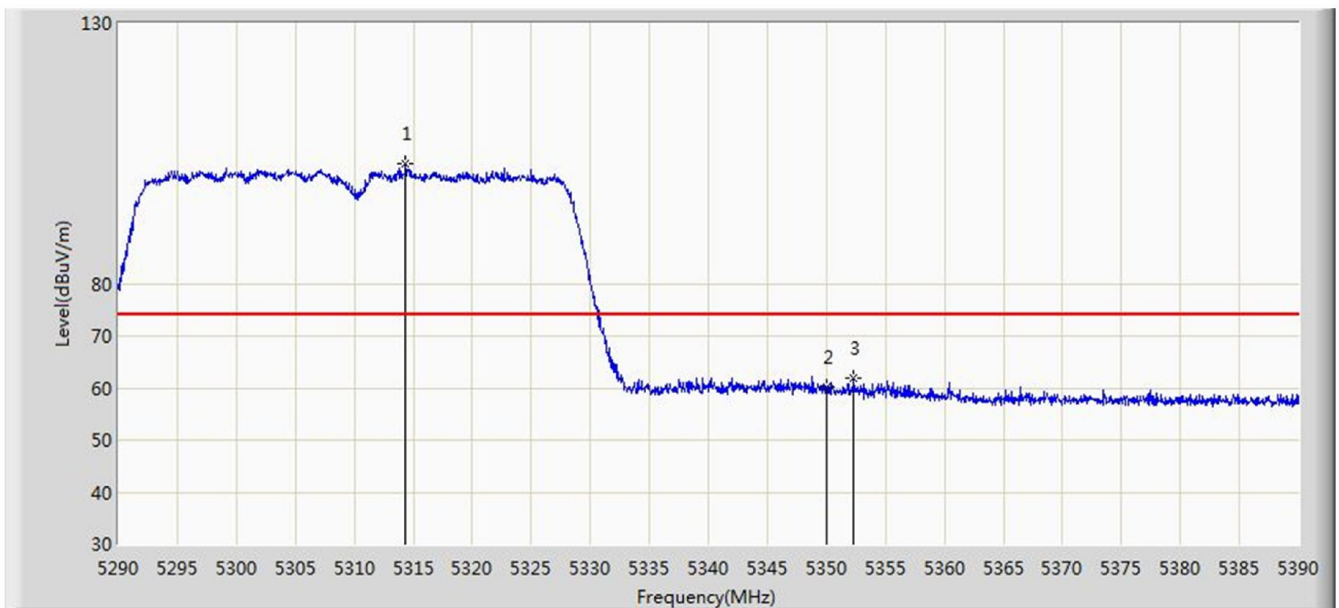


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5314.350        | 103.016                | 96.682               | N/A         | N/A            | 6.335       | PK   |
| 2  |      |      | 5350.000        | 60.159                 | 53.832               | -13.841     | 74.000         | 6.327       | PK   |
| 3  |      |      | 5352.300        | 62.028                 | 55.699               | -11.972     | 74.000         | 6.329       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Site: AC1                                              | Time: 2019/08/02 - 20:22 |
| Limit: FCC_Part15.209_RE(3m)                           | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                               | Polarity: Horizontal     |
| EUT: WIFI+BT Combo Module                              | Power: AC120V/60Hz       |
| Test Mode: Transmit by 802.11n-HT40 at channel 5310MHz |                          |

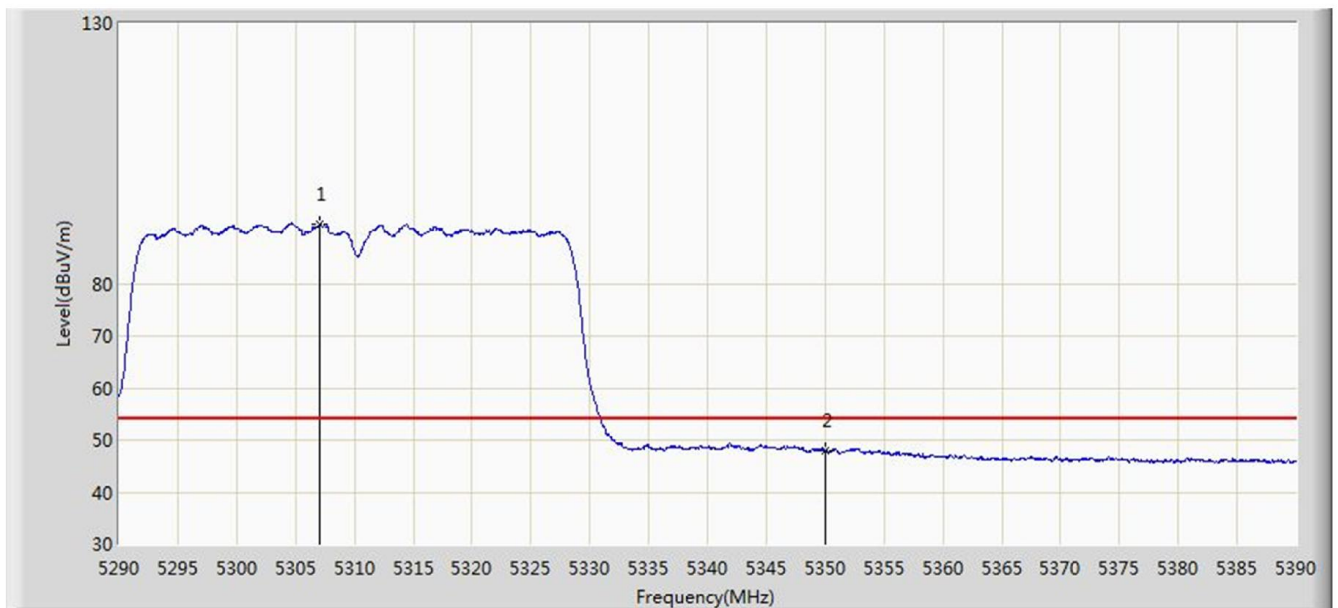


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5307.100        | 91.454                 | 85.145               | N/A         | N/A            | 6.309       | AV   |
| 2  |      |      | 5350.000        | 47.881                 | 41.554               | -6.119      | 54.000         | 6.327       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Site: AC1                                              | Time: 2019/08/02 - 20:23 |
| Limit: FCC_Part15.209_RE(3m)                           | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                               | Polarity: Vertical       |
| EUT: WIFI+BT Combo Module                              | Power: AC120V/60Hz       |
| Test Mode: Transmit by 802.11n-HT40 at channel 5310MHz |                          |

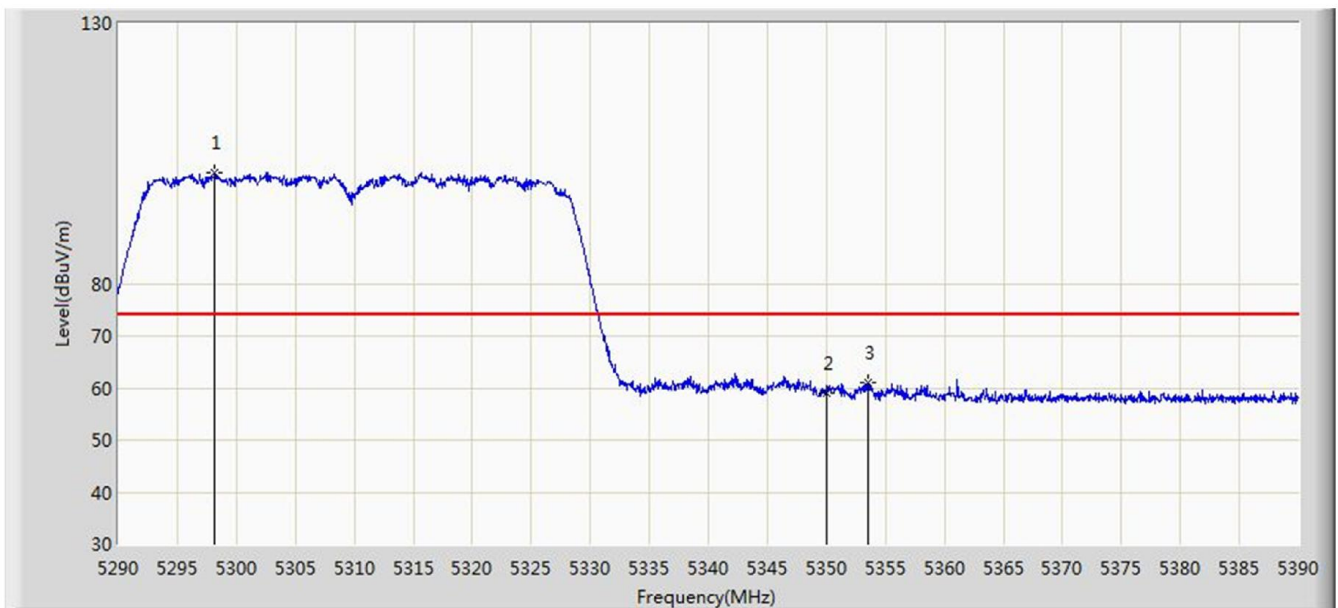


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5298.150        | 101.312                | 95.038               | N/A         | N/A            | 6.275       | PK   |
| 2  |      |      | 5350.000        | 59.032                 | 52.705               | -14.968     | 74.000         | 6.327       | PK   |
| 3  |      |      | 5353.550        | 61.057                 | 54.719               | -12.943     | 74.000         | 6.338       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Site: AC1                                              | Time: 2019/08/02 - 20:25 |
| Limit: FCC_Part15.209_RE(3m)                           | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                               | Polarity: Vertical       |
| EUT: WIFI+BT Combo Module                              | Power: AC120V/60Hz       |
| Test Mode: Transmit by 802.11n-HT40 at channel 5310MHz |                          |

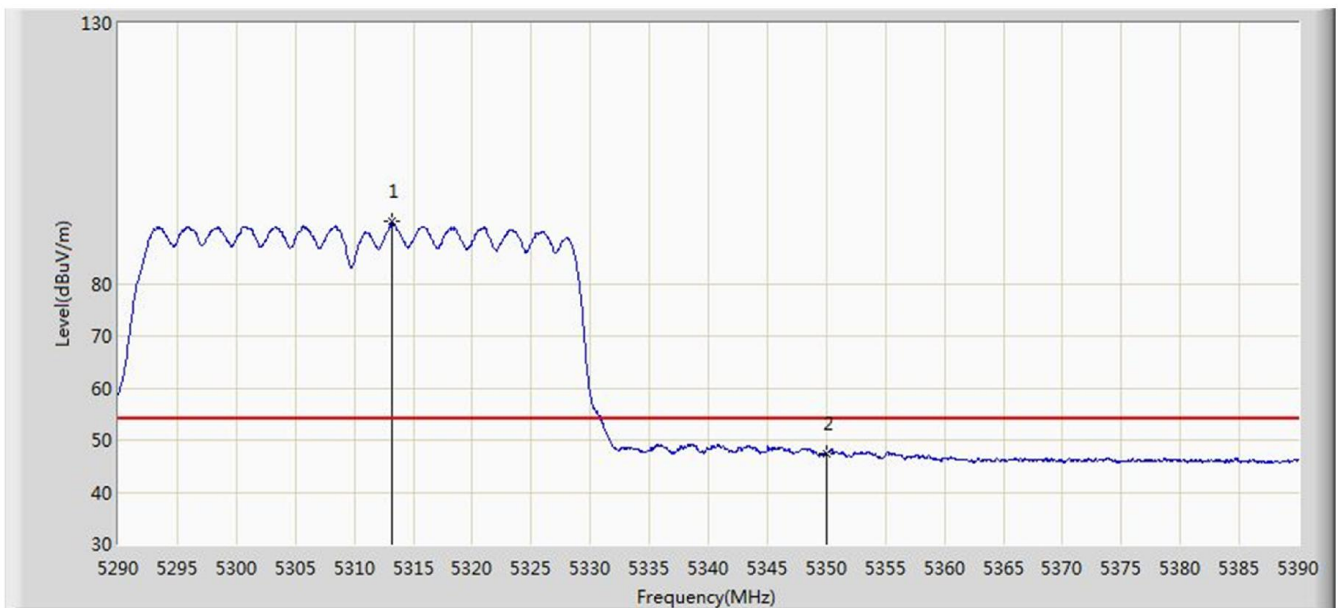


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5313.200        | 91.917                 | 85.587               | N/A         | N/A            | 6.330       | AV   |
| 2  |      |      | 5350.000        | 47.456                 | 41.129               | -6.544      | 54.000         | 6.327       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Site: AC1                                              | Time: 2019/08/02 - 20:25 |
| Limit: FCC_Part15.209_RE(3m)                           | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                               | Polarity: Horizontal     |
| EUT: WIFI+BT Combo Module                              | Power: AC120V/60Hz       |
| Test Mode: Transmit by 802.11n-HT40 at channel 5510MHz |                          |

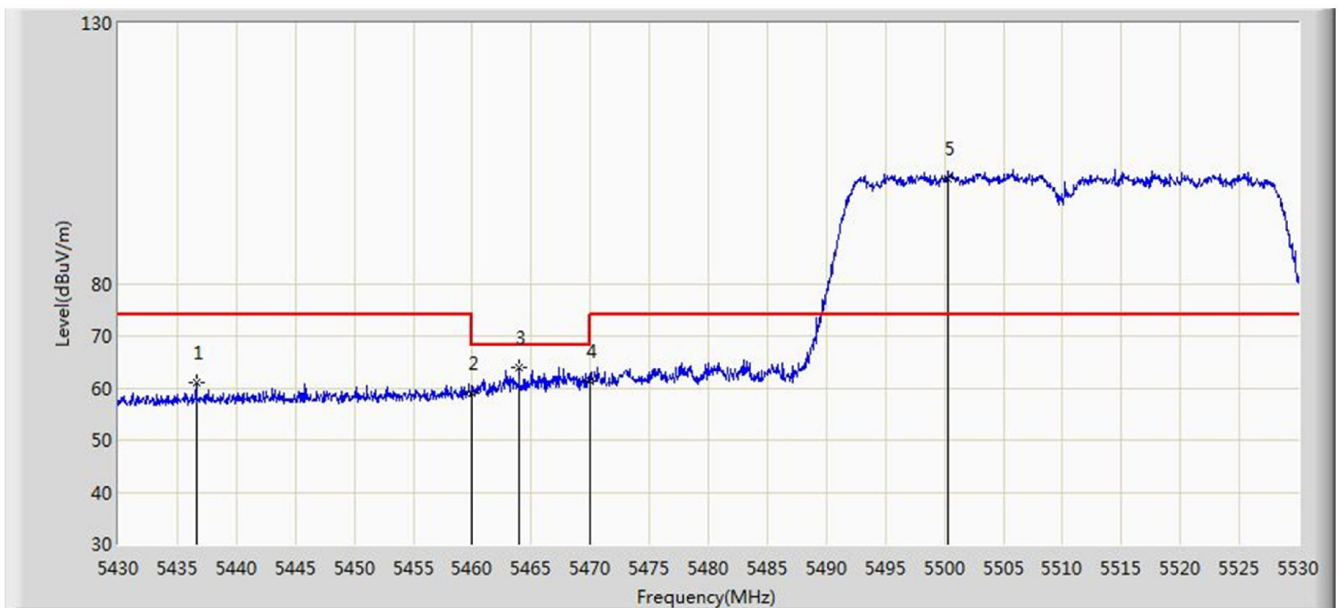


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5436.600        | 60.959                 | 54.393               | -13.041     | 74.000         | 6.566       | PK   |
| 2  |      |      | 5460.000        | 58.852                 | 52.240               | -15.148     | 74.000         | 6.612       | PK   |
| 3  |      |      | 5463.950        | 64.046                 | 57.452               | -4.154      | 68.200         | 6.594       | PK   |
| 4  |      |      | 5470.000        | 61.190                 | 54.623               | -7.010      | 68.200         | 6.567       | PK   |
| 5  |      | *    | 5500.350        | 100.191                | 93.481               | N/A         | N/A            | 6.710       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Site: AC1                                              | Time: 2019/08/02 - 20:26 |
| Limit: FCC_Part15.209_RE(3m)                           | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                               | Polarity: Horizontal     |
| EUT: WIFI+BT Combo Module                              | Power: AC120V/60Hz       |
| Test Mode: Transmit by 802.11n-HT40 at channel 5510MHz |                          |

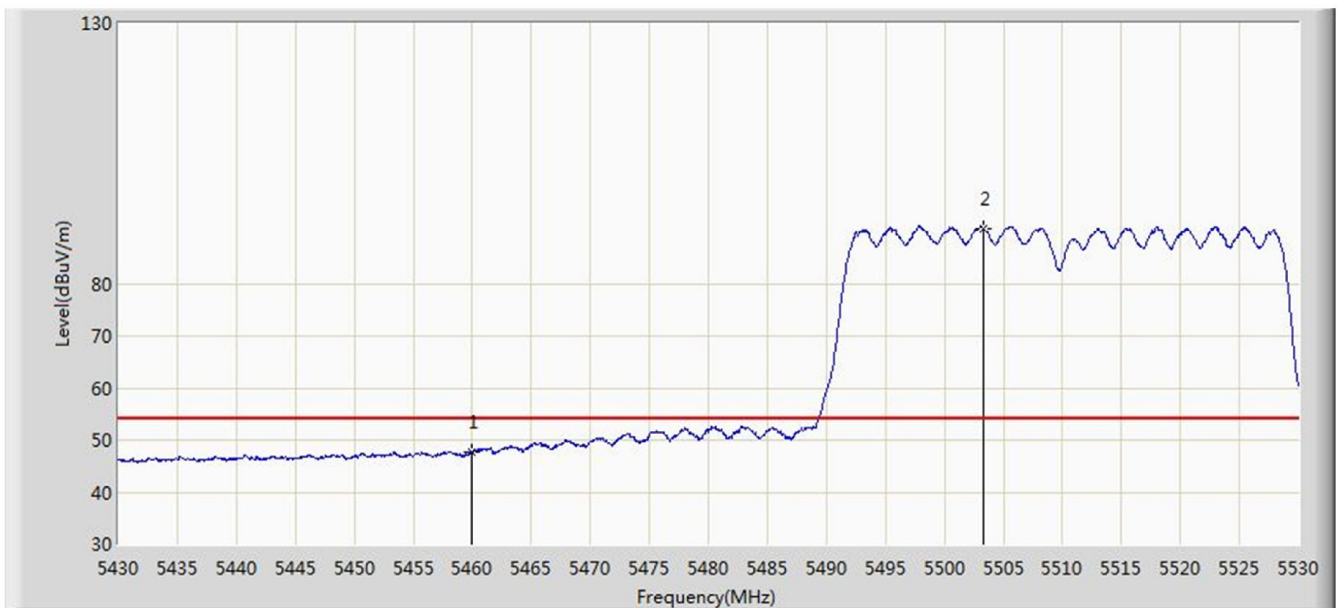


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5460.000        | 47.648                 | 41.036               | -6.352      | 54.000         | 6.612       | AV   |
| 2  |      | *    | 5503.250        | 90.666                 | 83.935               | N/A         | N/A            | 6.731       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Site: AC1                                              | Time: 2019/08/02 - 20:27 |
| Limit: FCC_Part15.209_RE(3m)                           | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                               | Polarity: Vertical       |
| EUT: WIFI+BT Combo Module                              | Power: AC120V/60Hz       |
| Test Mode: Transmit by 802.11n-HT40 at channel 5510MHz |                          |

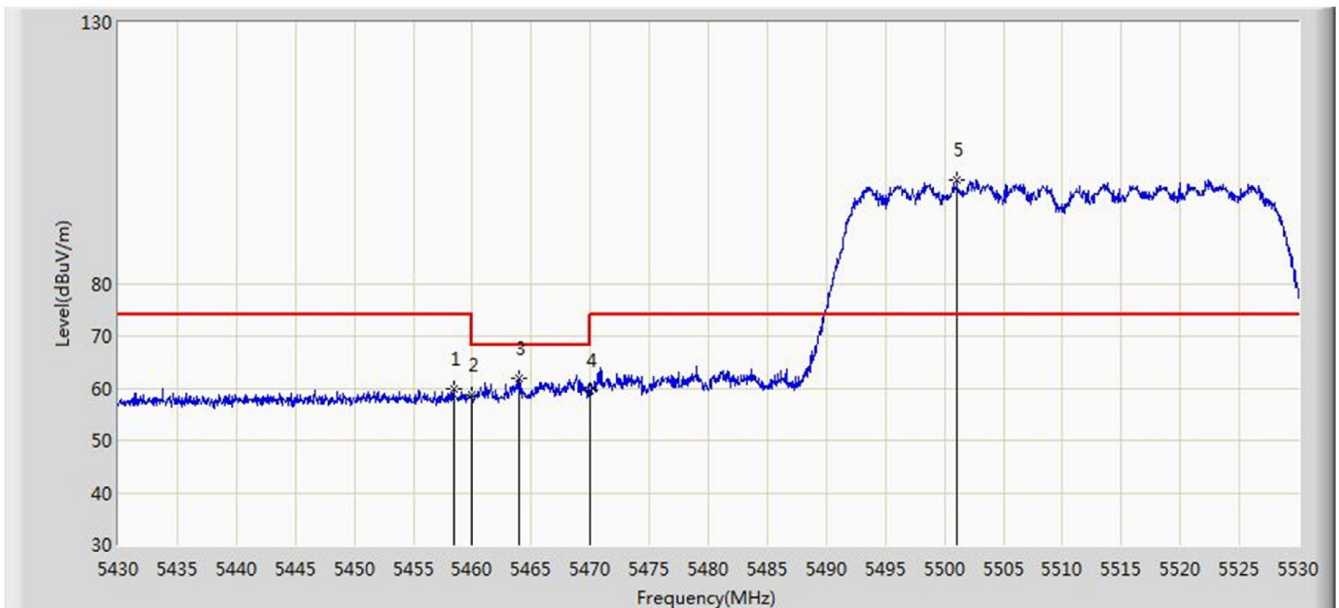


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5458.400        | 59.776                 | 53.156               | -14.224     | 74.000         | 6.619       | PK   |
| 2  |      |      | 5460.000        | 58.733                 | 52.121               | -15.267     | 74.000         | 6.612       | PK   |
| 3  |      |      | 5463.900        | 61.746                 | 55.151               | -6.454      | 68.200         | 6.594       | PK   |
| 4  |      | *    | 5470.000        | 59.427                 | 52.860               | -8.773      | 68.200         | 6.567       | PK   |
| 5  |      |      | 5501.050        | 99.859                 | 93.144               | N/A         | N/A            | 6.716       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Site: AC1                                              | Time: 2019/08/02 - 20:28 |
| Limit: FCC_Part15.209_RE(3m)                           | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                               | Polarity: Vertical       |
| EUT: WIFI+BT Combo Module                              | Power: AC120V/60Hz       |
| Test Mode: Transmit by 802.11n-HT40 at channel 5510MHz |                          |

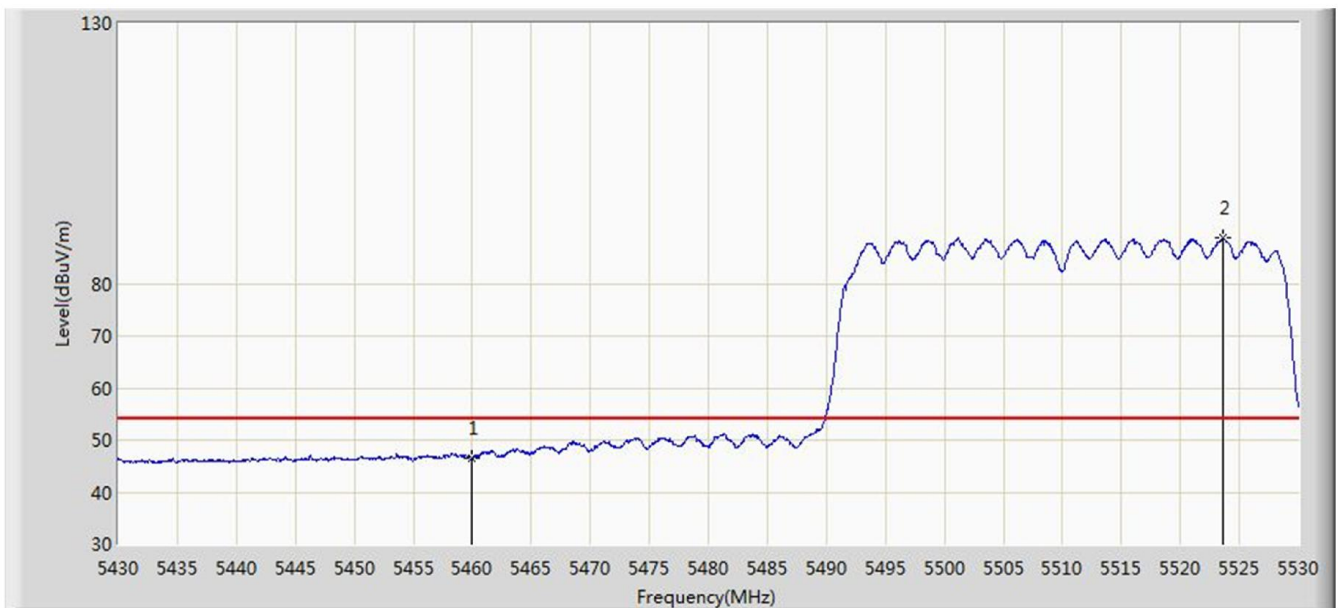


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5460.000        | 46.582                 | 39.970               | -7.418      | 54.000         | 6.612       | AV   |
| 2  |      | *    | 5523.550        | 88.804                 | 82.113               | N/A         | N/A            | 6.691       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Site: AC1                                              | Time: 2019/08/02 - 20:28 |
| Limit: FCC_Part15.209_RE(3m)                           | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                               | Polarity: Horizontal     |
| EUT: WIFI+BT Combo Module                              | Power: AC120V/60Hz       |
| Test Mode: Transmit by 802.11n-HT40 at channel 5670MHz |                          |

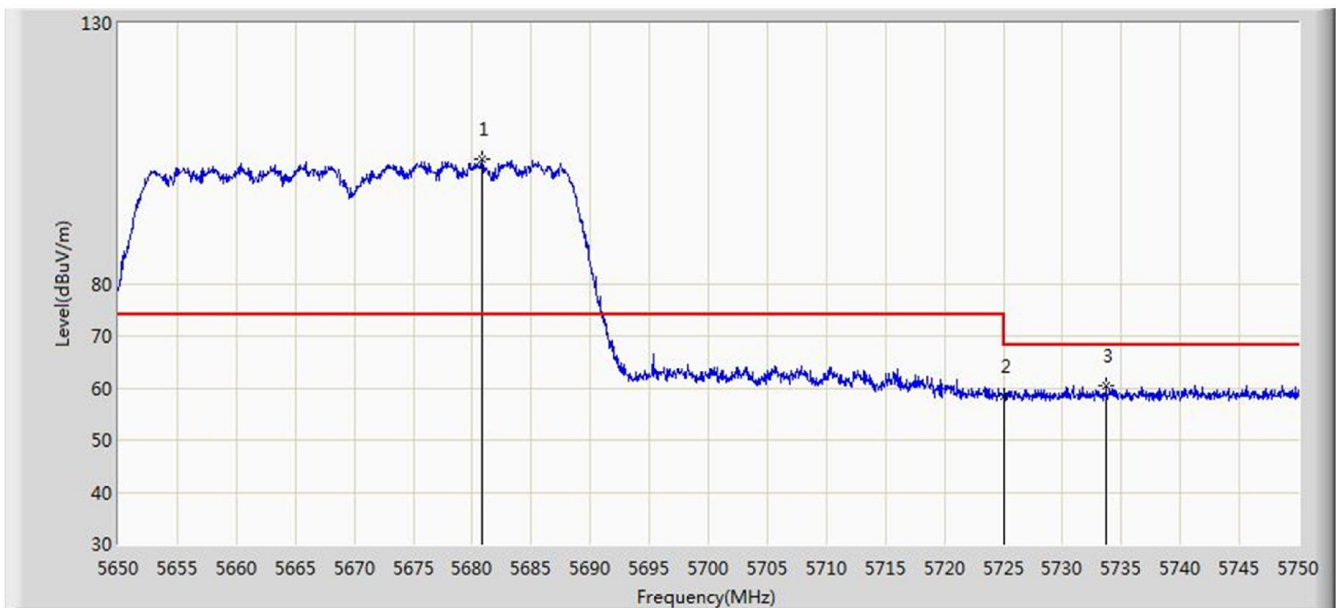


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5680.850        | 103.863                | 97.104               | N/A         | N/A            | 6.759       | PK   |
| 2  |      |      | 5725.000        | 58.432                 | 51.565               | -9.768      | 68.200         | 6.867       | PK   |
| 3  |      |      | 5733.700        | 60.337                 | 53.424               | -7.863      | 68.200         | 6.912       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Site: AC1                                              | Time: 2019/08/02 - 20:29 |
| Limit: FCC_Part15.209_RE(3m)                           | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                               | Polarity: Vertical       |
| EUT: WIFI+BT Combo Module                              | Power: AC120V/60Hz       |
| Test Mode: Transmit by 802.11n-HT40 at channel 5670MHz |                          |

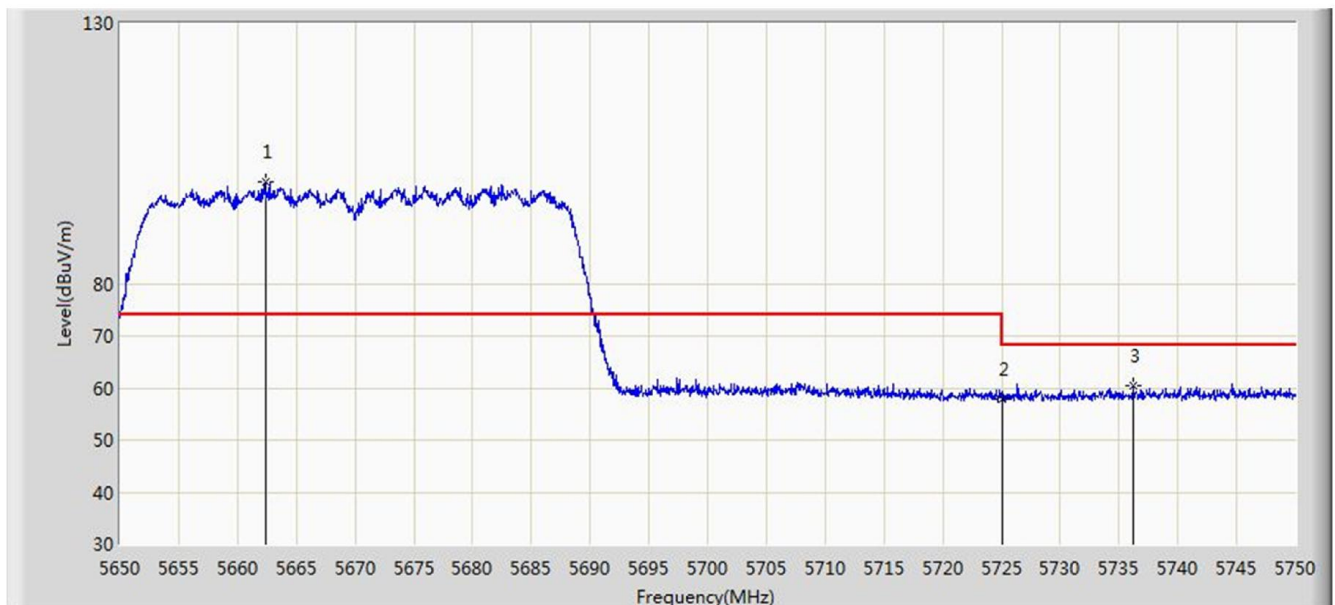


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5662.400        | 99.528                 | 92.778               | N/A         | N/A            | 6.750       | PK   |
| 2  |      |      | 5725.000        | 57.952                 | 51.085               | -10.248     | 68.200         | 6.867       | PK   |
| 3  |      |      | 5736.200        | 60.451                 | 53.521               | -7.749      | 68.200         | 6.930       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Site: AC1                                              | Time: 2019/08/02 - 20:30 |
| Limit: FCC_Part15.407_RE(3m)                           | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                               | Polarity: Horizontal     |
| EUT: WIFI+BT Combo Module                              | Power: AC120V/60Hz       |
| Test Mode: Transmit by 802.11n-HT40 at channel 5755MHz |                          |

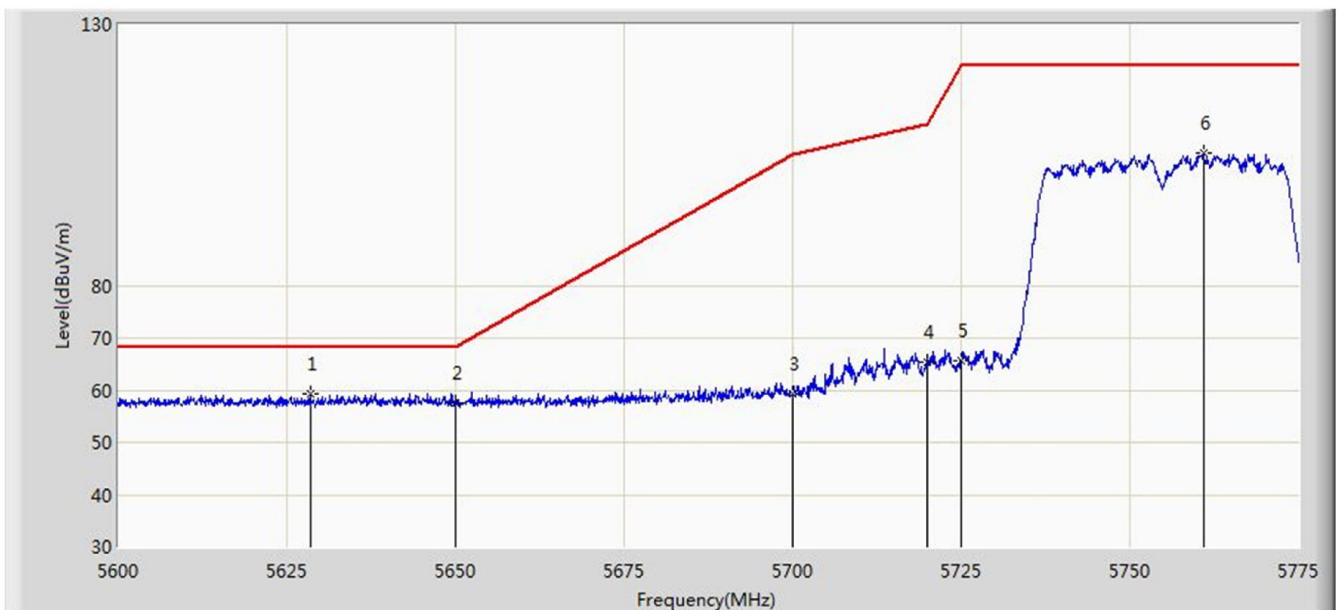


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5628.437        | 59.196                 | 52.445               | -9.004      | 68.200         | 6.750       | PK   |
| 2  |      |      | 5650.000        | 57.542                 | 50.749               | -10.658     | 68.200         | 6.793       | PK   |
| 3  |      |      | 5700.000        | 59.329                 | 52.420               | -45.871     | 105.200        | 6.909       | PK   |
| 4  |      |      | 5720.000        | 65.392                 | 58.488               | -45.408     | 110.800        | 6.904       | PK   |
| 5  |      |      | 5725.000        | 65.545                 | 58.678               | -56.655     | 122.200        | 6.867       | PK   |
| 6  |      |      | 5760.913        | 105.403                | 98.221               | N/A         | N/A            | 7.182       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Site: AC1                                              | Time: 2019/08/02 - 20:33 |
| Limit: FCC_Part15.407_RE(3m)                           | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                               | Polarity: Vertical       |
| EUT: WIFI+BT Combo Module                              | Power: AC120V/60Hz       |
| Test Mode: Transmit by 802.11n-HT40 at channel 5755MHz |                          |

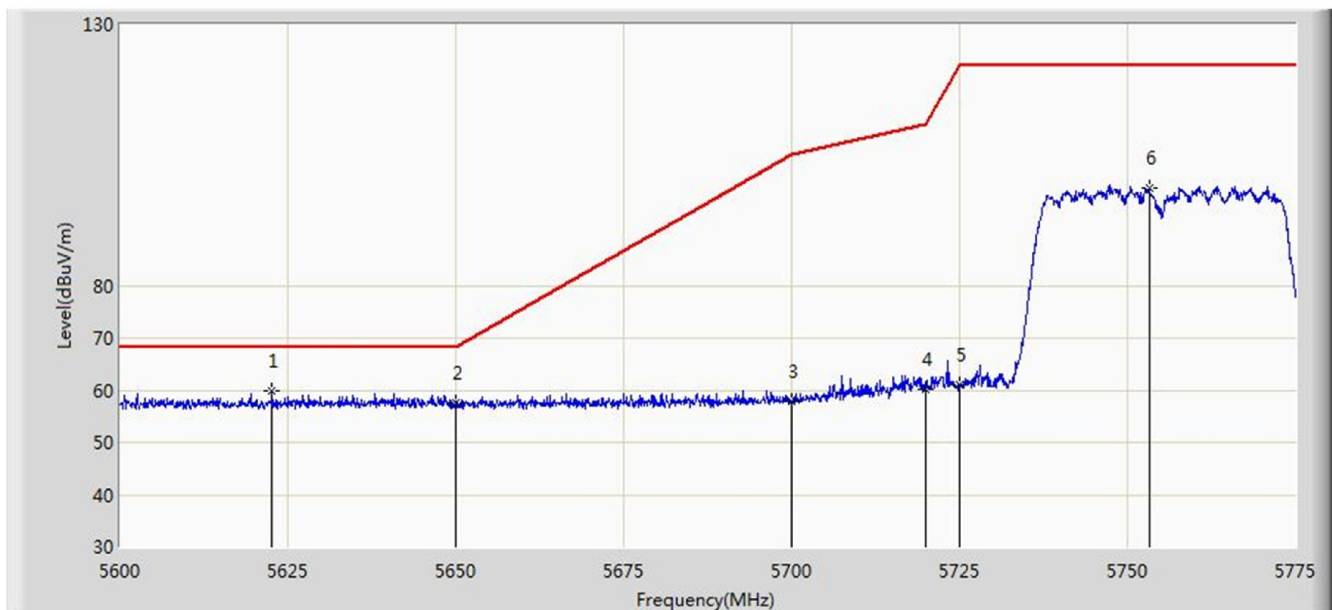

| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5622.663        | 59.864                 | 53.147               | -8.336      | 68.200         | 6.717       | PK   |
| 2  |      |      | 5650.000        | 57.661                 | 50.868               | -10.539     | 68.200         | 6.793       | PK   |
| 3  |      |      | 5700.000        | 57.948                 | 51.039               | -47.252     | 105.200        | 6.909       | PK   |
| 4  |      |      | 5720.000        | 60.256                 | 53.352               | -50.544     | 110.800        | 6.904       | PK   |
| 5  |      |      | 5725.000        | 60.944                 | 54.077               | -61.256     | 122.200        | 6.867       | PK   |
| 6  |      |      | 5753.212        | 98.634                 | 91.534               | N/A         | N/A            | 7.100       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)