


Site: AC1	Time: 2019/08/02 - 20:34
Limit: FCC_Part15.407_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIFI+BT Combo Module	Power: AC120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at channel 5795MHz	

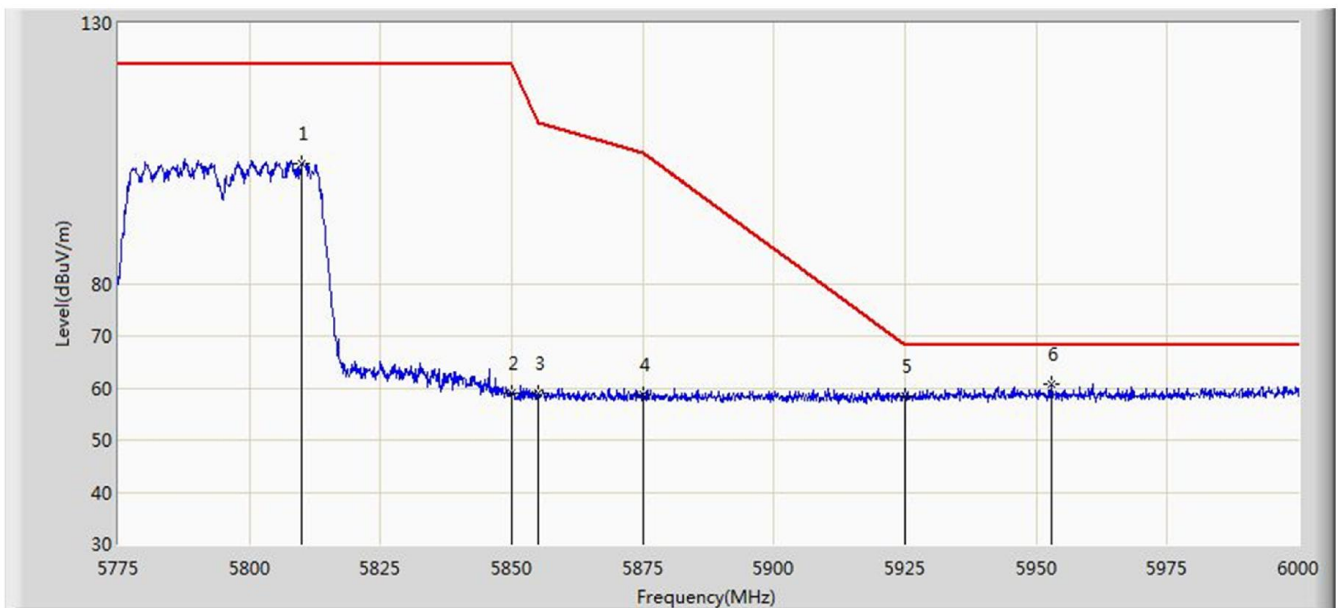


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5810.100	103.102	95.977	N/A	N/A	7.125	PK
2			5850.000	58.980	51.650	-63.220	122.200	7.331	PK
3			5855.000	58.858	51.530	-51.942	110.800	7.327	PK
4			5875.000	58.782	51.368	-46.418	105.200	7.414	PK
5			5925.000	58.303	51.003	-9.897	68.200	7.299	PK
6		*	5952.975	60.642	53.181	-7.558	68.200	7.461	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/08/02 - 20:35
Limit: FCC_Part15.407_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIFI+BT Combo Module	Power: AC120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at channel 5795MHz	

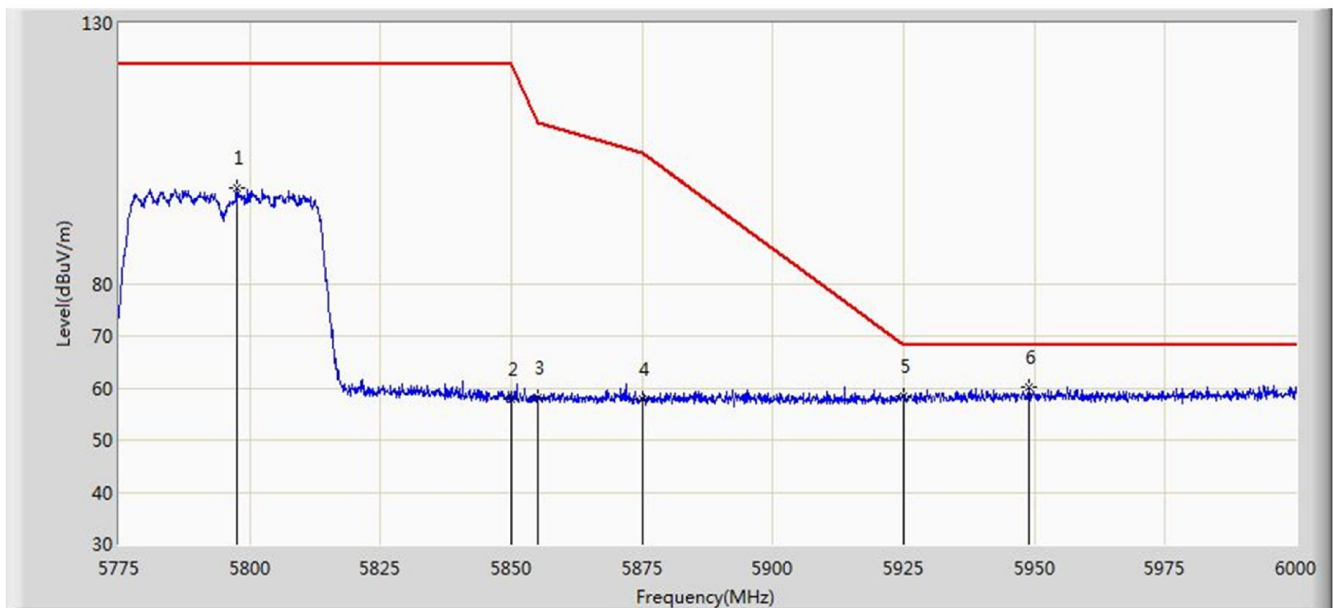


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5797.612	98.395	91.343	N/A	N/A	7.052	PK
2			5850.000	57.914	50.584	-64.286	122.200	7.331	PK
3			5855.000	58.124	50.796	-52.676	110.800	7.327	PK
4			5875.000	57.769	50.355	-47.431	105.200	7.414	PK
5			5925.000	58.361	51.061	-9.839	68.200	7.299	PK
6		*	5949.038	60.015	52.526	-8.185	68.200	7.490	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/08/02 - 20:37
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIFI+BT Combo Module	Power: AC120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5180MHz	

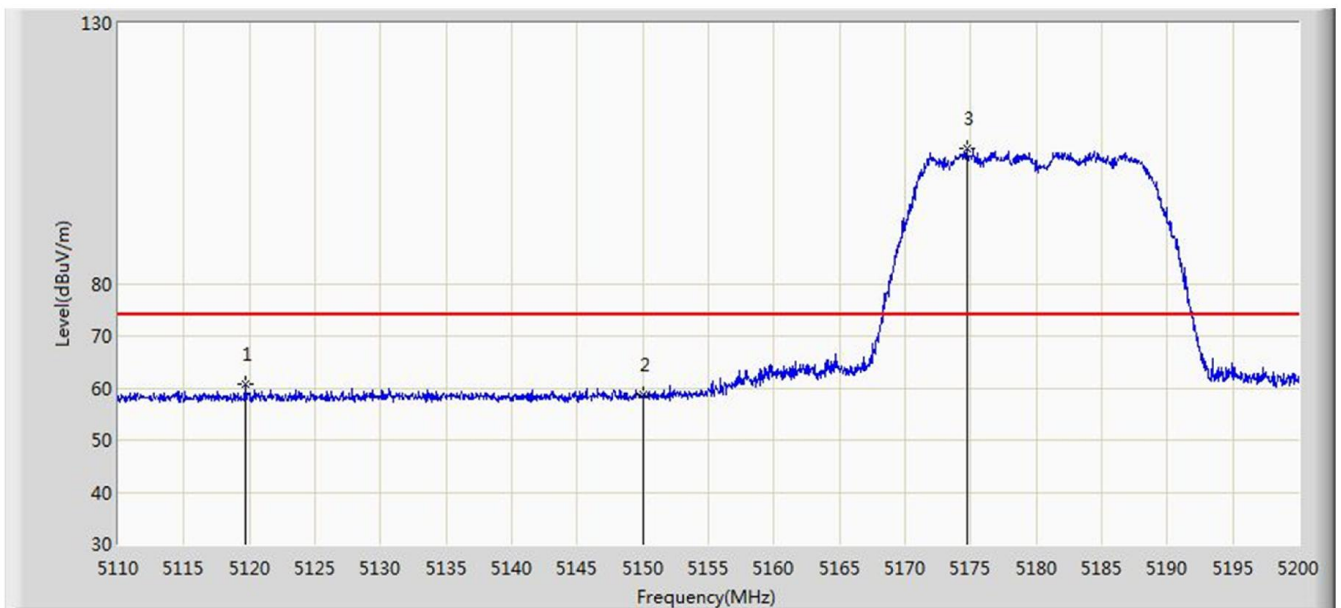


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5119.675	60.851	54.323	-13.149	74.000	6.527	PK
2			5150.000	58.647	52.250	-15.353	74.000	6.398	PK
3		*	5174.710	105.826	99.307	N/A	N/A	6.518	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/08/02 - 20:38
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIFI+BT Combo Module	Power: AC120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5180MHz	

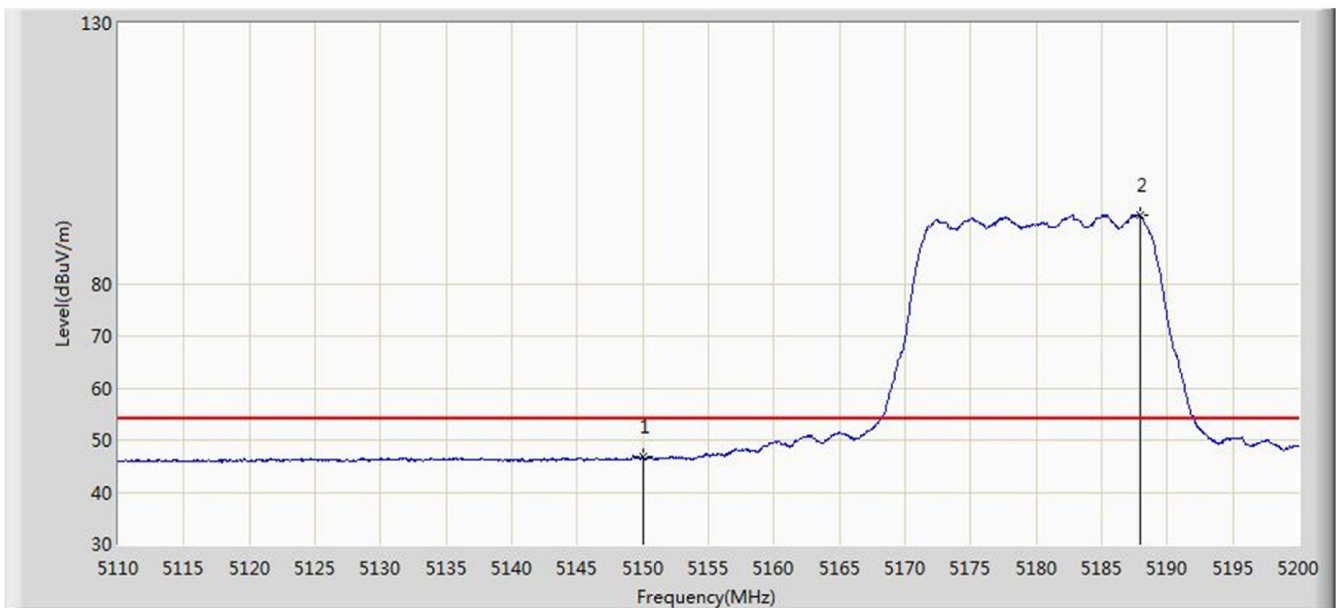


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	46.894	40.497	-7.106	54.000	6.398	AV
2		*	5187.895	93.212	86.681	N/A	N/A	6.531	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/08/02 - 20:40
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIFI+BT Combo Module	Power: AC120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5180MHz	

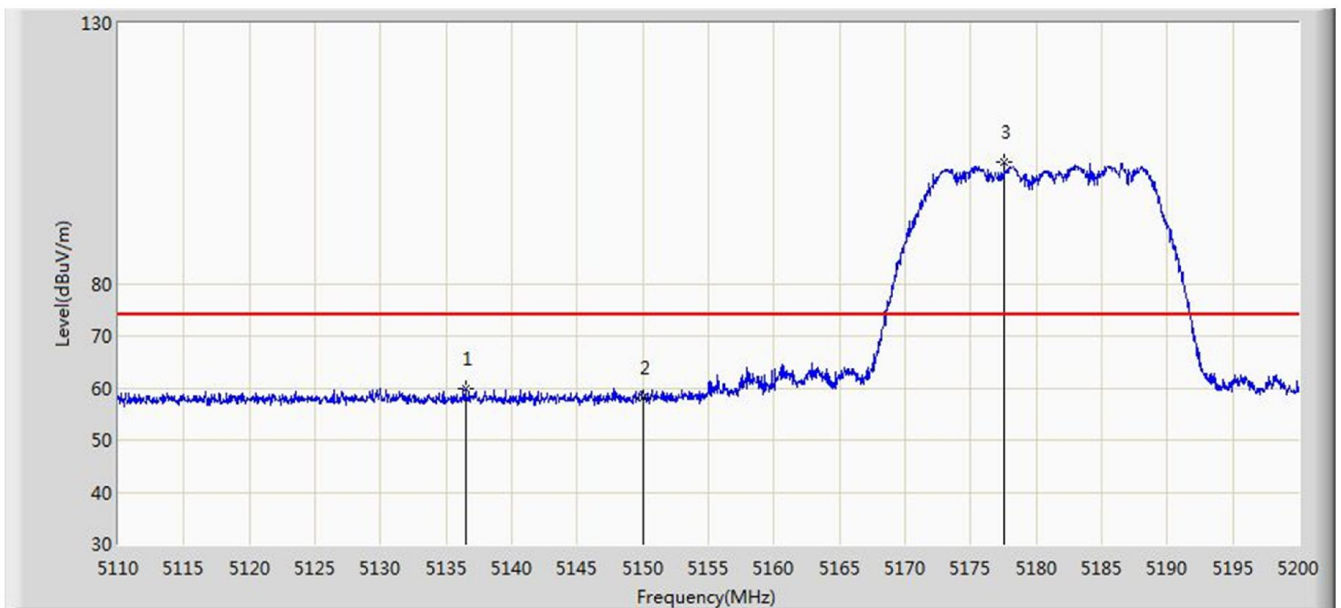


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5136.460	59.804	53.239	-14.196	74.000	6.565	PK
2			5150.000	58.163	51.766	-15.837	74.000	6.398	PK
3		*	5177.545	103.460	96.914	N/A	N/A	6.547	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/08/02 - 20:40
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIFI+BT Combo Module	Power: AC120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5180MHz	

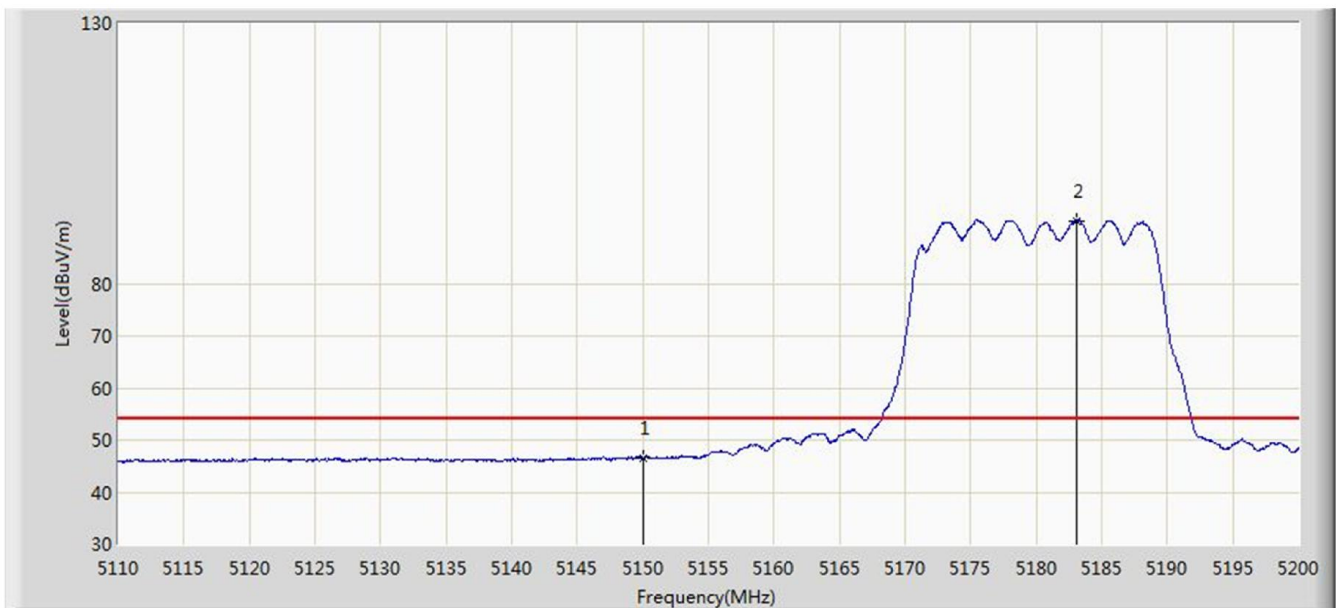


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	46.590	40.193	-7.410	54.000	6.398	AV
2		*	5183.125	92.060	85.482	N/A	N/A	6.578	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/08/02 - 20:41
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIFI+BT Combo Module	Power: AC120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5320MHz	

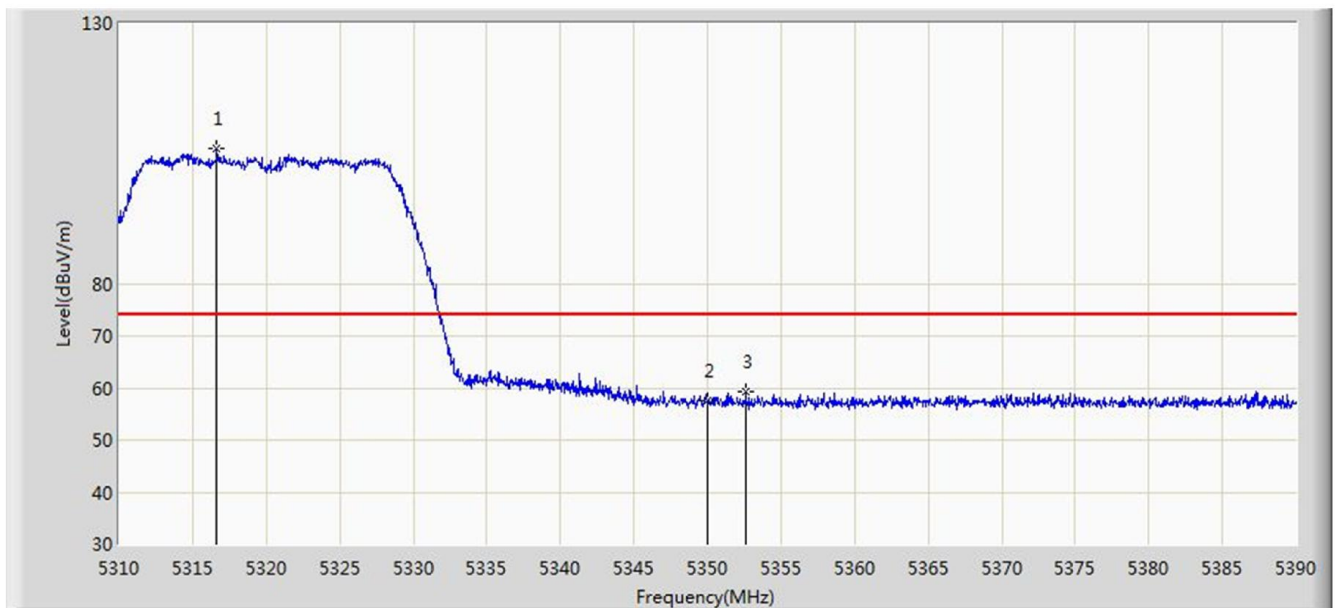


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5316.640	105.892	99.548	N/A	N/A	6.344	PK
2			5350.000	57.681	51.354	-16.319	74.000	6.327	PK
3			5352.600	59.241	52.910	-14.759	74.000	6.331	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/08/02 - 20:42
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIFI+BT Combo Module	Power: AC120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5320MHz	

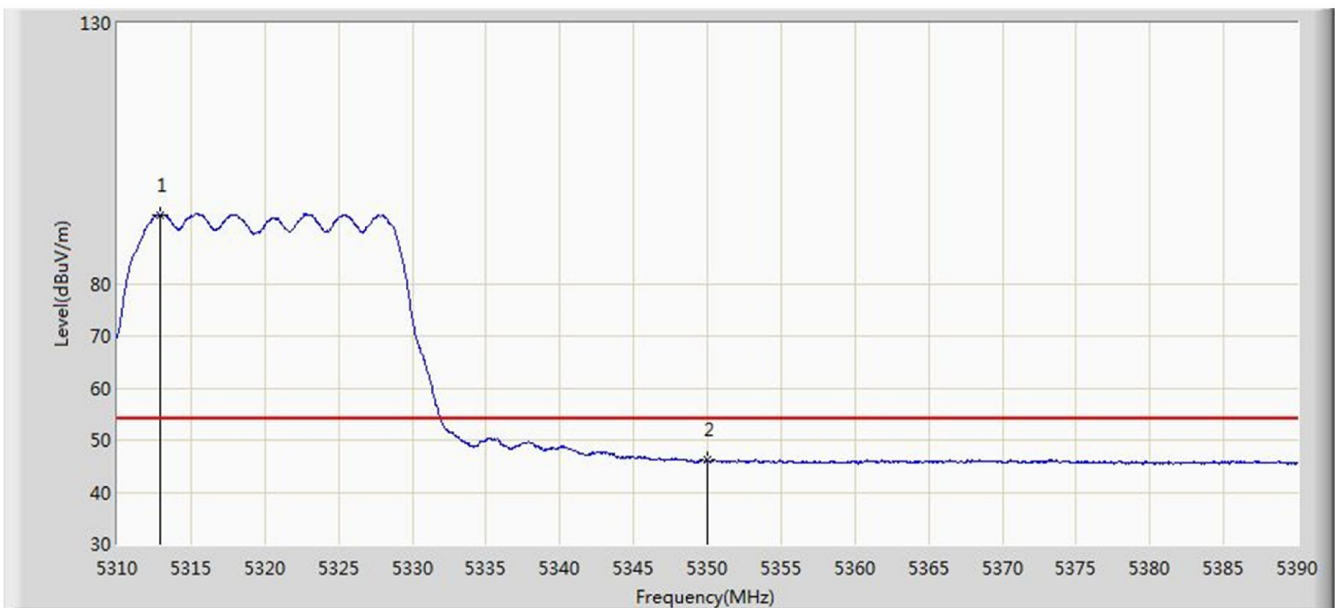


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5312.920	93.103	86.774	N/A	N/A	6.329	AV
2			5350.000	46.095	39.768	-7.905	54.000	6.327	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/08/02 - 20:42
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIFI+BT Combo Module	Power: AC120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5320MHz	

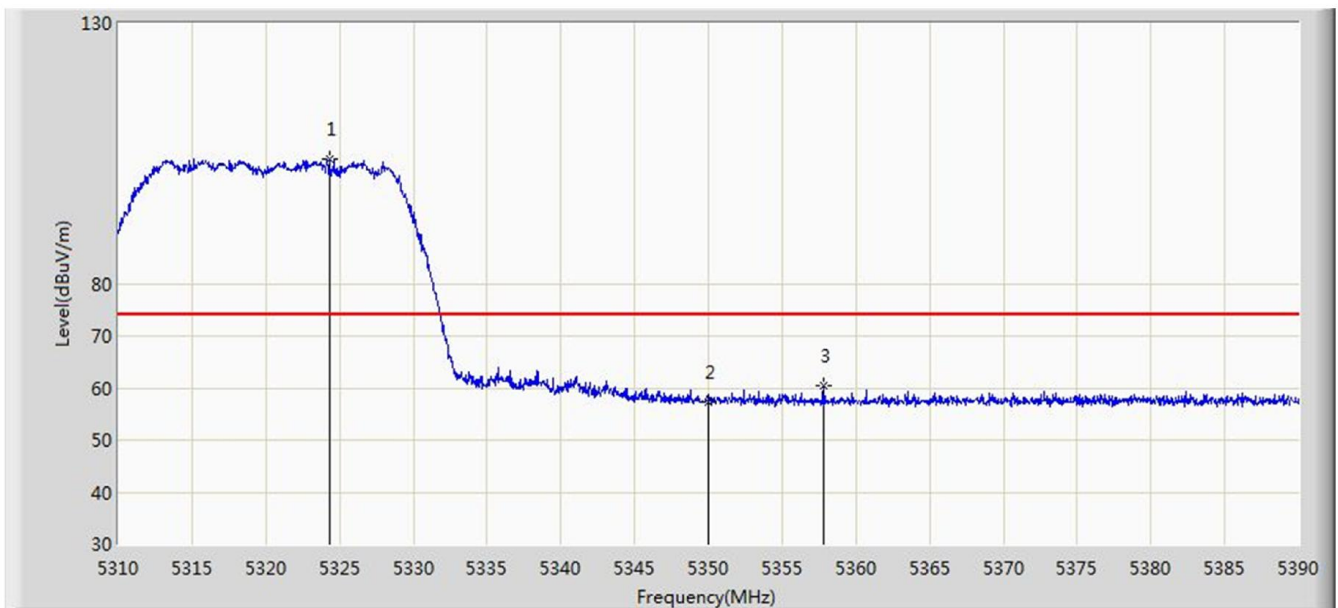


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5324.320	103.905	97.563	N/A	N/A	6.342	PK
2			5350.000	57.330	51.003	-16.670	74.000	6.327	PK
3			5357.800	60.391	54.022	-13.609	74.000	6.370	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/08/02 - 20:43
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIFI+BT Combo Module	Power: AC120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5320MHz	

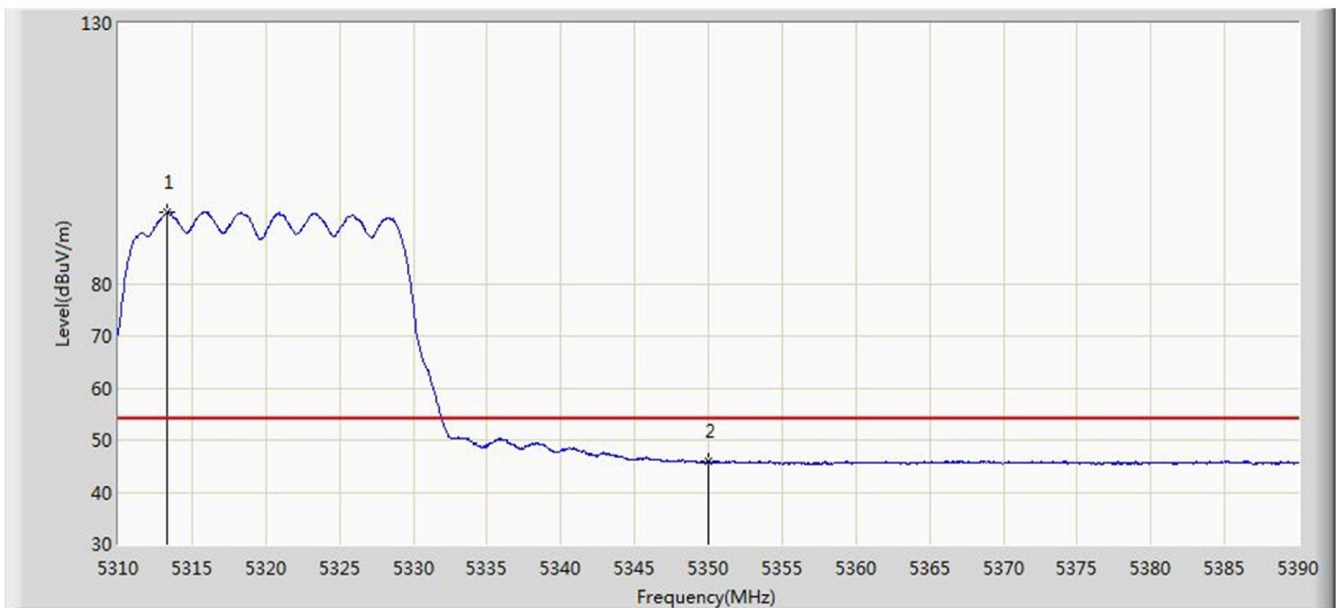


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5313.320	93.880	87.550	N/A	N/A	6.330	AV
2			5350.000	45.824	39.497	-8.176	54.000	6.327	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/08/02 - 20:44
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIFI+BT Combo Module	Power: AC120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5500MHz	

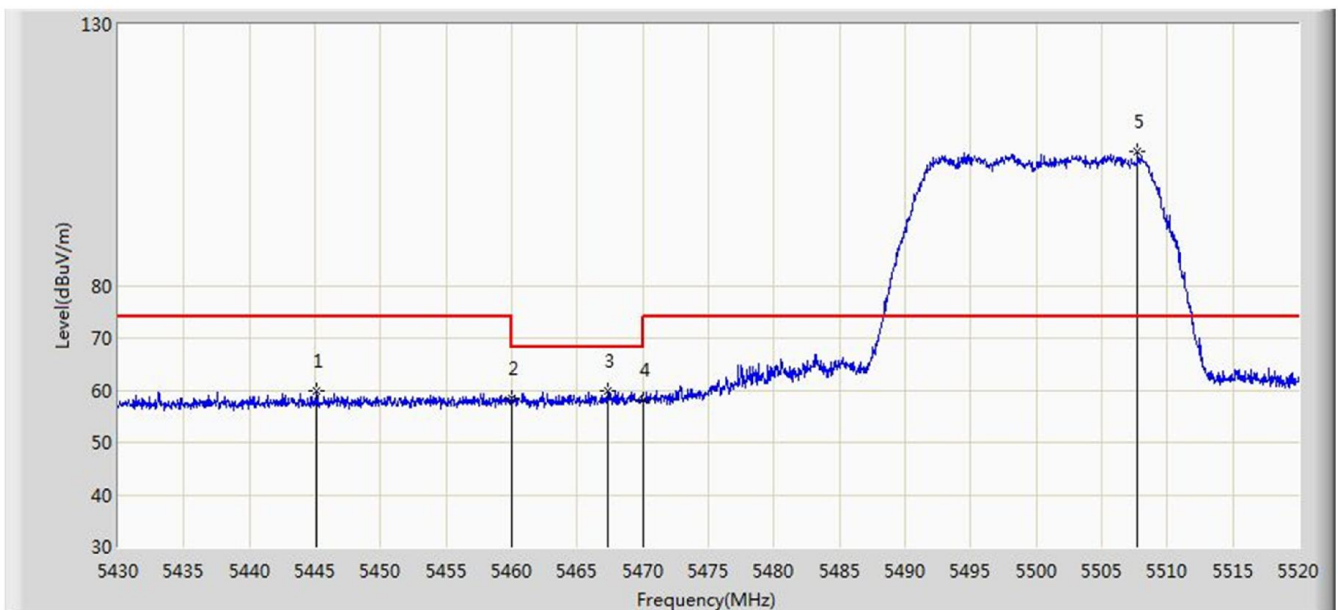


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5445.165	59.972	53.369	-14.028	74.000	6.603	PK
2			5460.000	58.479	51.867	-15.521	74.000	6.612	PK
3			5467.305	59.945	53.366	-8.255	68.200	6.579	PK
4		*	5470.000	58.078	51.511	-10.122	68.200	6.567	PK
5			5507.760	105.708	98.971	31.708	74.000	6.737	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/08/02 - 20:45
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIFI+BT Combo Module	Power: AC120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5500MHz	

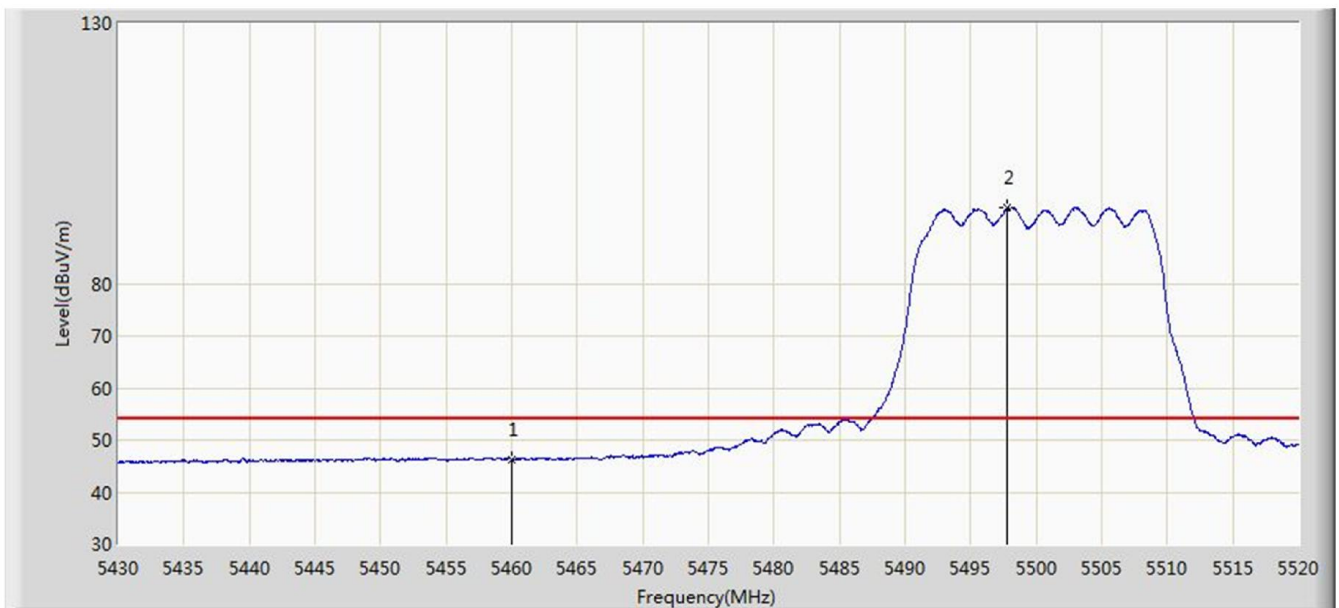


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	46.256	39.644	-7.744	54.000	6.612	AV
2		*	5497.815	94.740	88.048	N/A	N/A	6.691	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/08/02 - 20:45
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIFI+BT Combo Module	Power: AC120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5500MHz	

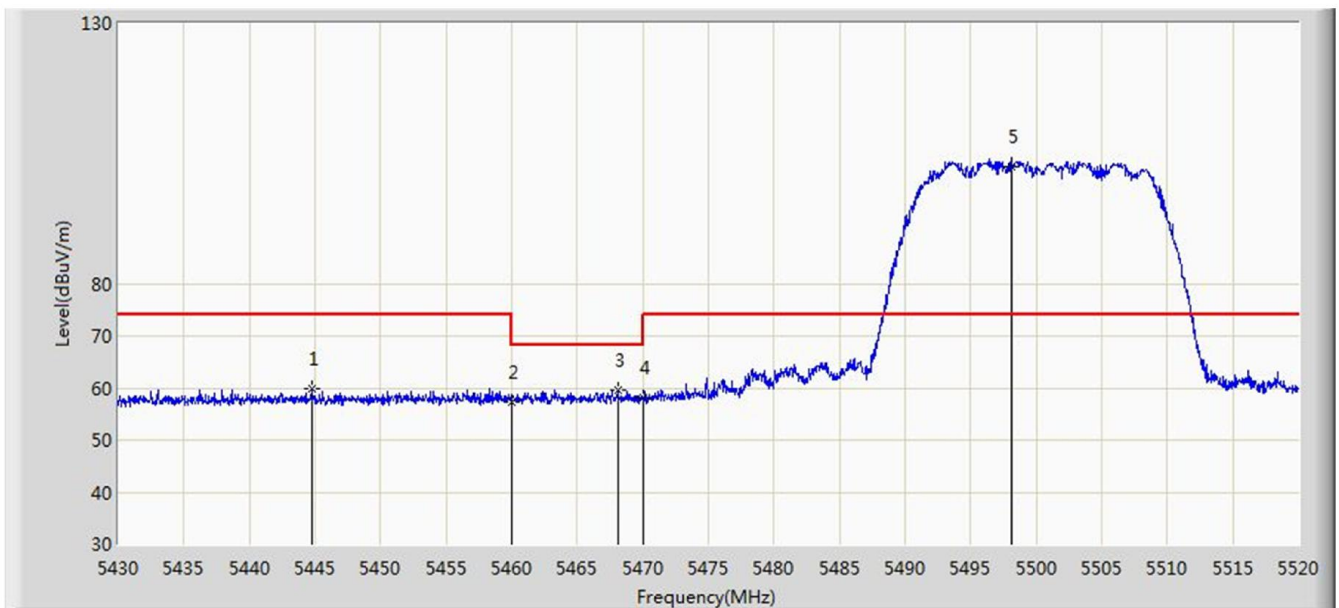


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5444.760	59.954	53.352	-14.046	74.000	6.602	PK
2			5460.000	57.358	50.746	-16.642	74.000	6.612	PK
3			5468.070	59.556	52.980	-8.644	68.200	6.576	PK
4			5470.000	58.199	51.632	-10.001	68.200	6.567	PK
5		*	5498.175	102.546	95.852	N/A	N/A	6.694	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/08/02 - 20:46
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIFI+BT Combo Module	Power: AC120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5500MHz	

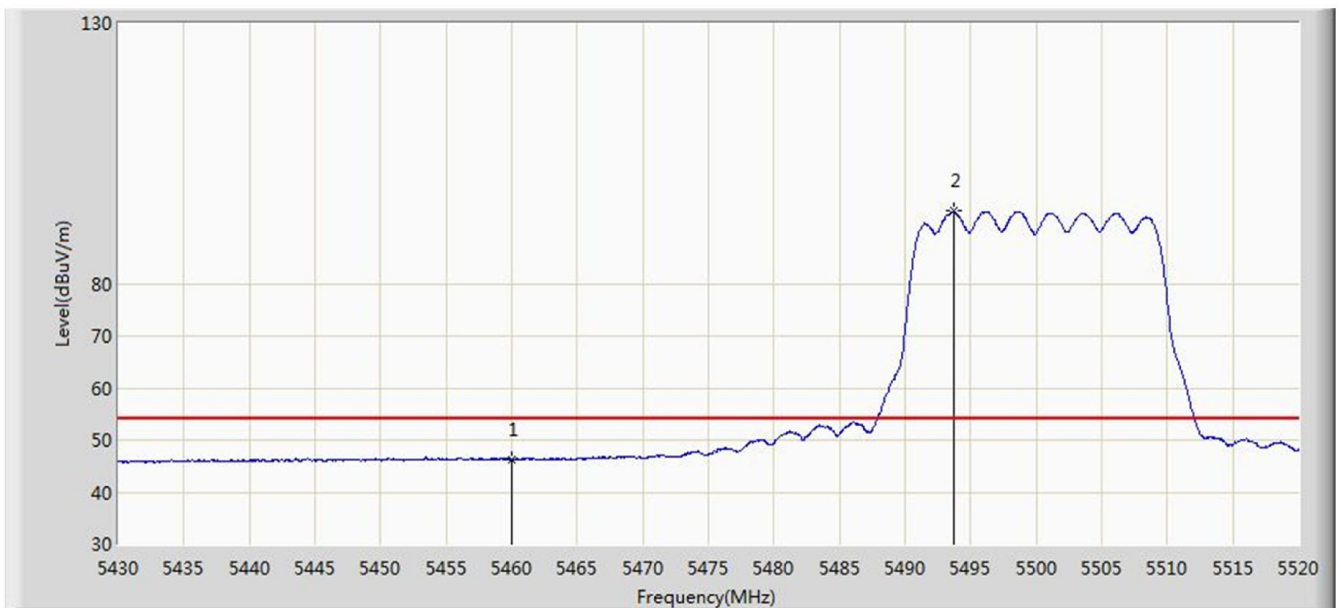


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	46.292	39.680	-7.708	54.000	6.612	AV
2		*	5493.720	93.962	87.300	N/A	N/A	6.661	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/08/02 - 20:47
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIFI+BT Combo Module	Power: AC120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5700MHz	

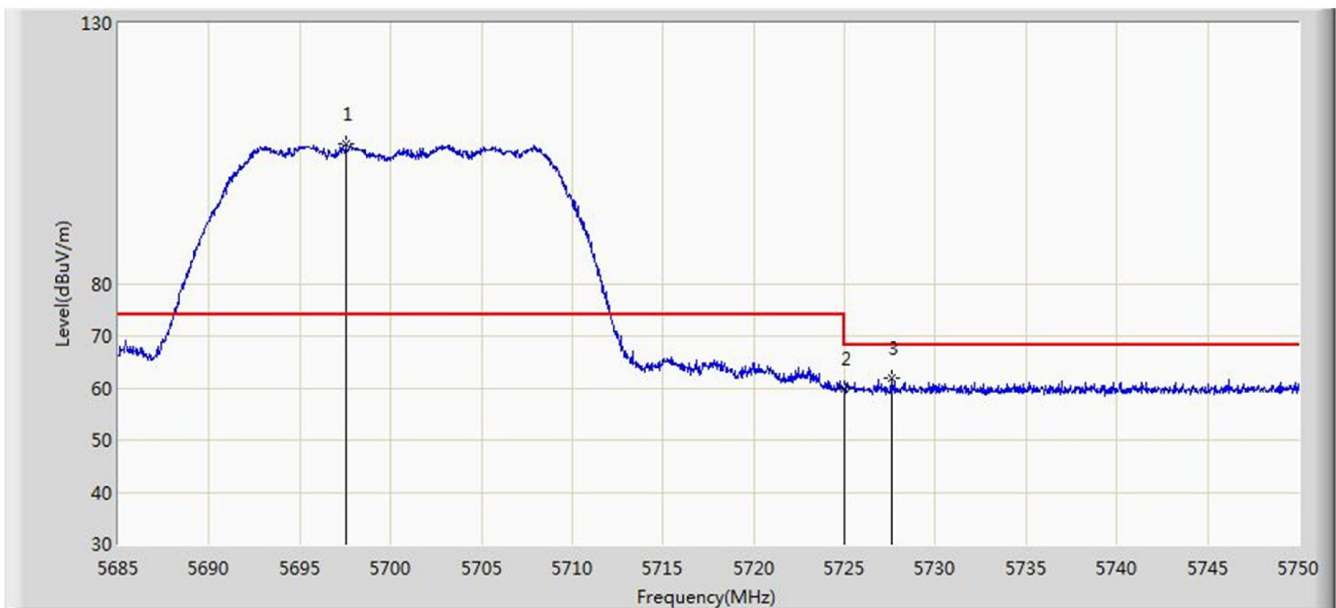


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5697.545	106.769	99.879	N/A	N/A	6.890	PK
2			5725.000	59.858	52.991	-8.342	68.200	6.867	PK
3			5727.575	61.766	54.895	-6.434	68.200	6.871	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/08/02 - 20:51
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIFI+BT Combo Module	Power: AC120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5700MHz	

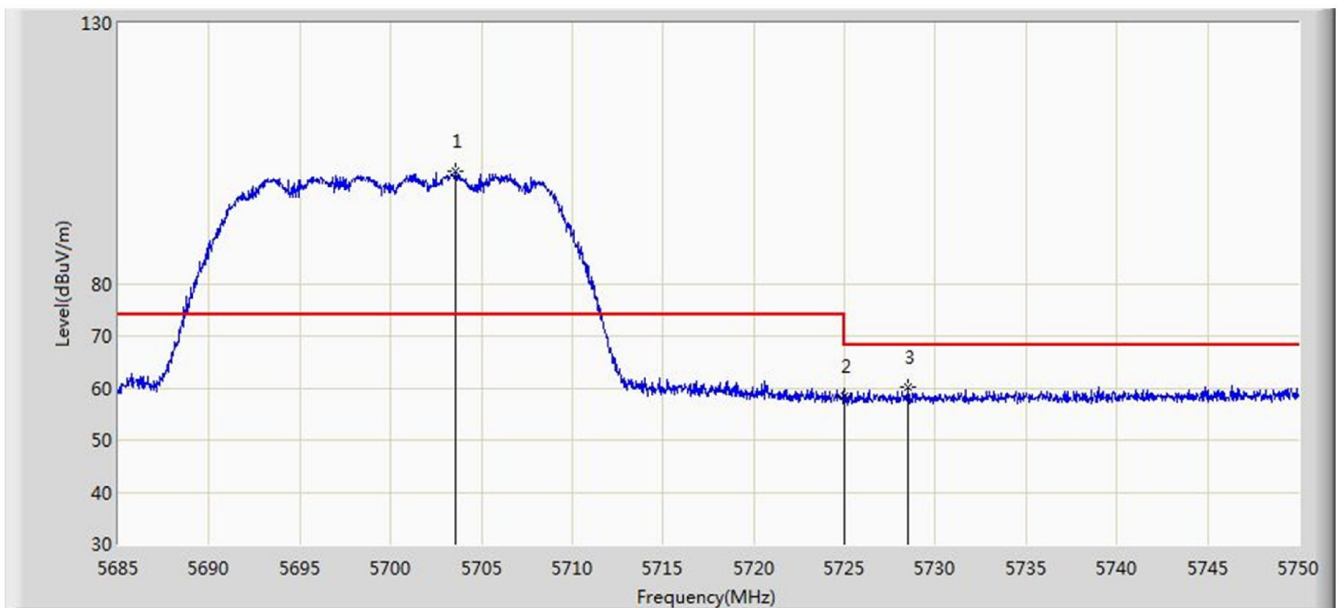


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5703.590	101.557	94.620	N/A	N/A	6.937	PK
2			5725.000	58.422	51.555	-9.778	68.200	6.867	PK
3			5728.518	60.143	53.266	-8.057	68.200	6.877	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/08/02 - 20:52
Limit: FCC_Part15.407_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIFI+BT Combo Module	Power: AC120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5745MHz	

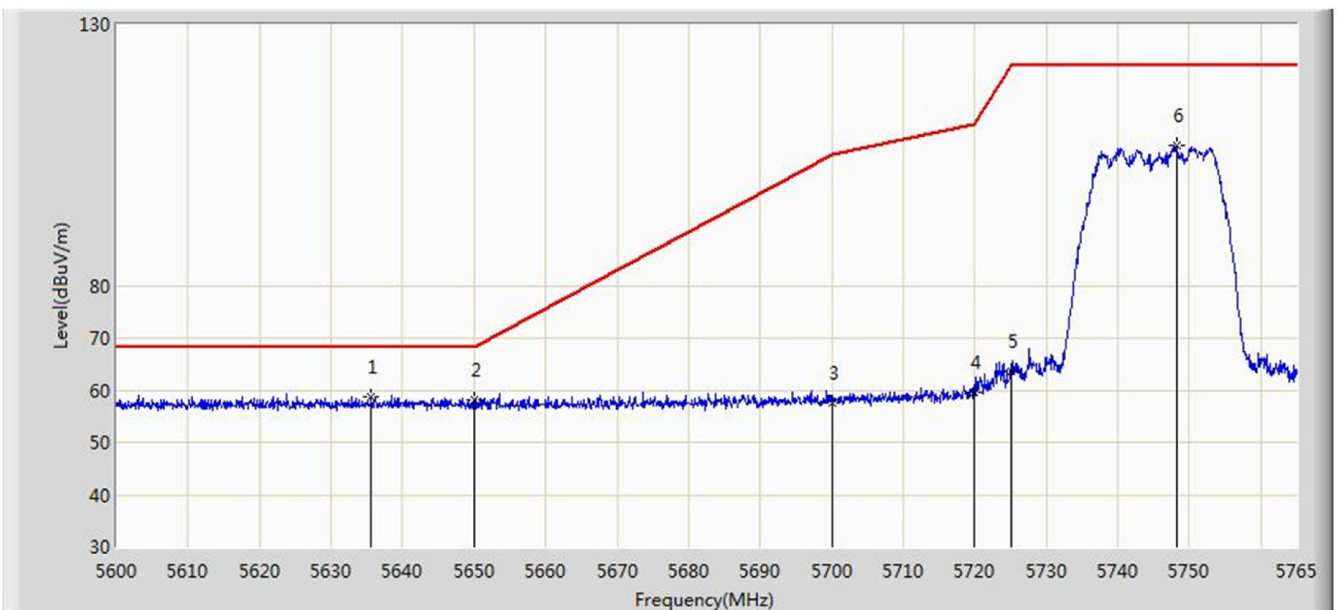


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5635.640	58.827	52.030	-9.373	68.200	6.798	PK
2			5650.000	57.986	51.193	-10.214	68.200	6.793	PK
3			5700.000	57.482	50.573	-47.718	105.200	6.909	PK
4			5720.000	59.576	52.672	-51.224	110.800	6.904	PK
5			5725.000	63.751	56.884	-58.449	122.200	6.867	PK
6			5748.170	106.798	99.759	-15.402	122.200	7.038	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/08/02 - 20:53
Limit: FCC_Part15.407_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIFI+BT Combo Module	Power: AC120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5745MHz	

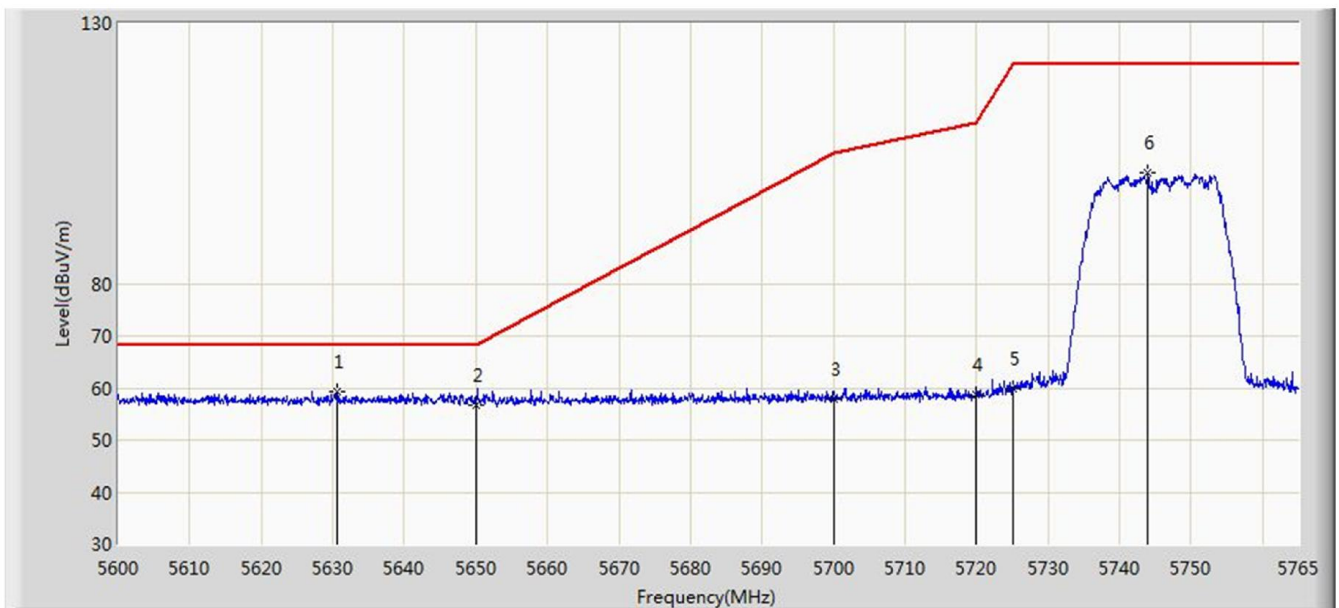


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5630.525	59.199	52.435	-9.001	68.200	6.764	PK
2			5650.000	56.743	49.950	-11.457	68.200	6.793	PK
3			5700.000	57.707	50.798	-47.493	105.200	6.909	PK
4			5720.000	58.693	51.789	-52.107	110.800	6.904	PK
5			5725.000	59.749	52.882	-62.451	122.200	6.867	PK
6			5743.962	101.353	94.366	N/A	N/A	6.987	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/08/02 - 20:54
Limit: FCC_Part15.407_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIFI+BT Combo Module	Power: AC120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5825MHz	

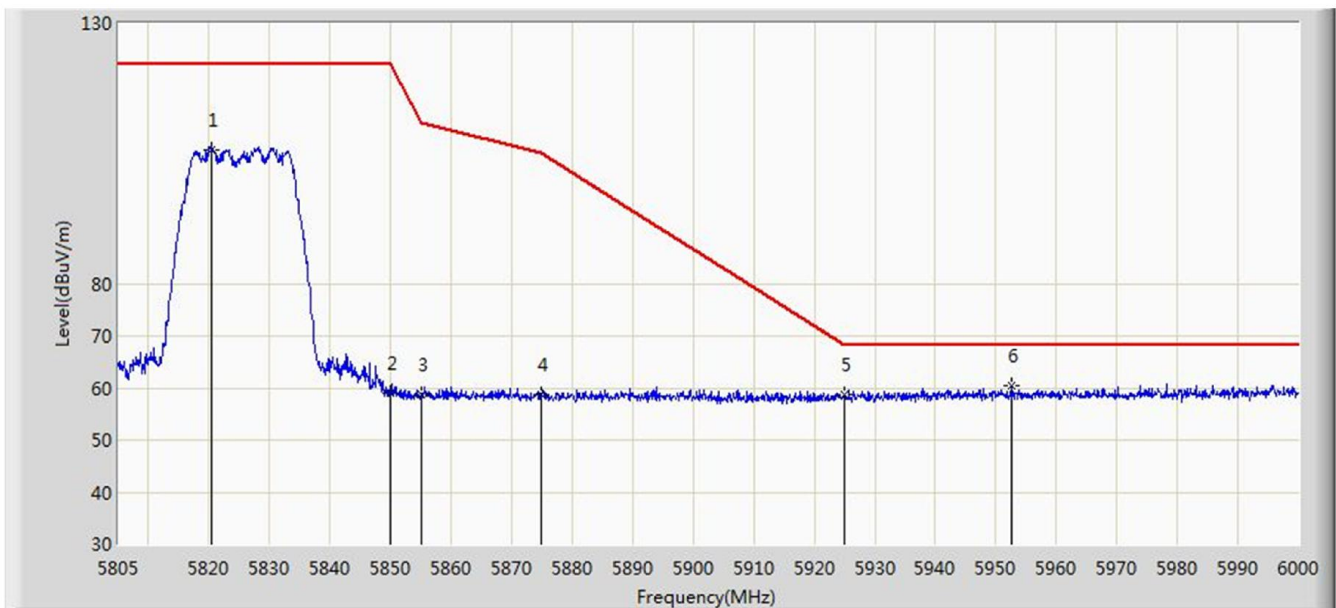


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5820.405	105.767	98.496	N/A	N/A	7.271	PK
2			5850.000	58.997	51.667	-63.203	122.200	7.331	PK
3			5855.000	58.793	51.465	-52.007	110.800	7.327	PK
4			5875.000	58.638	51.224	-46.562	105.200	7.414	PK
5			5925.000	58.594	51.294	-9.606	68.200	7.299	PK
6		*	5952.712	60.322	52.859	-7.878	68.200	7.463	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/08/02 - 20:56
Limit: FCC_Part15.407_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIFI+BT Combo Module	Power: AC120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5825MHz	

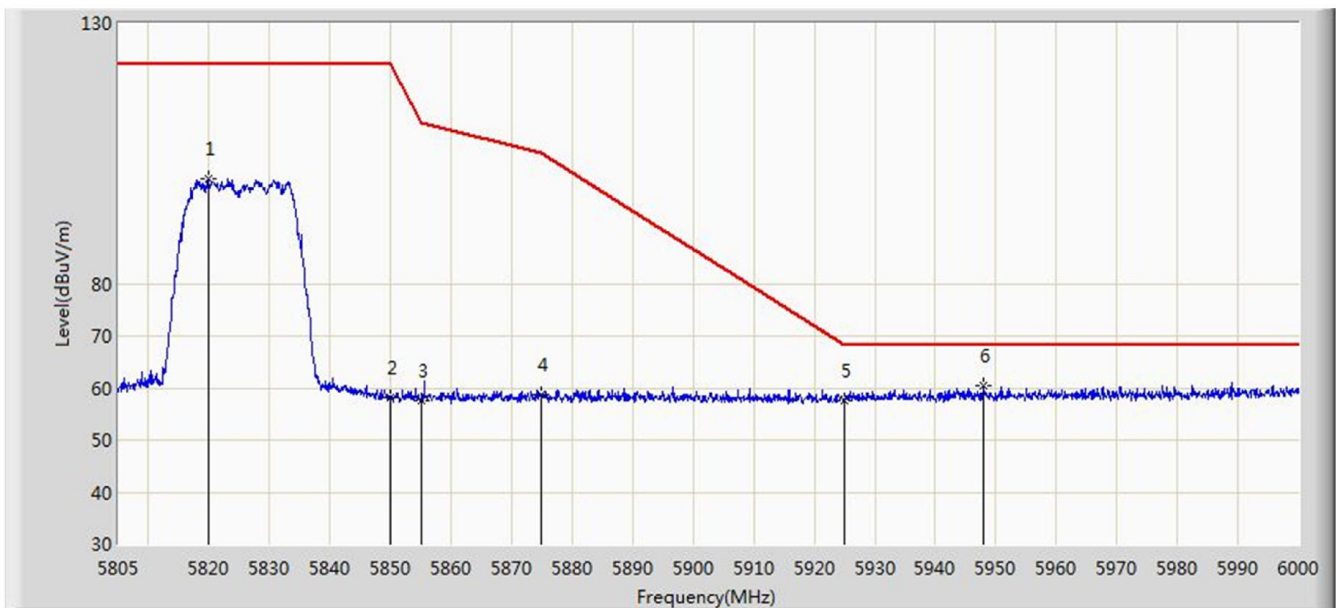


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5819.917	100.153	92.889	N/A	N/A	7.264	PK
2			5850.000	58.033	50.703	-64.167	122.200	7.331	PK
3			5855.000	57.650	50.322	-53.150	110.800	7.327	PK
4			5875.000	58.719	51.305	-46.481	105.200	7.414	PK
5			5925.000	57.597	50.297	-10.603	68.200	7.299	PK
6		*	5947.837	60.476	52.977	-7.724	68.200	7.499	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/08/02 - 20:57
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIFI+BT Combo Module	Power: AC120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5190MHz	

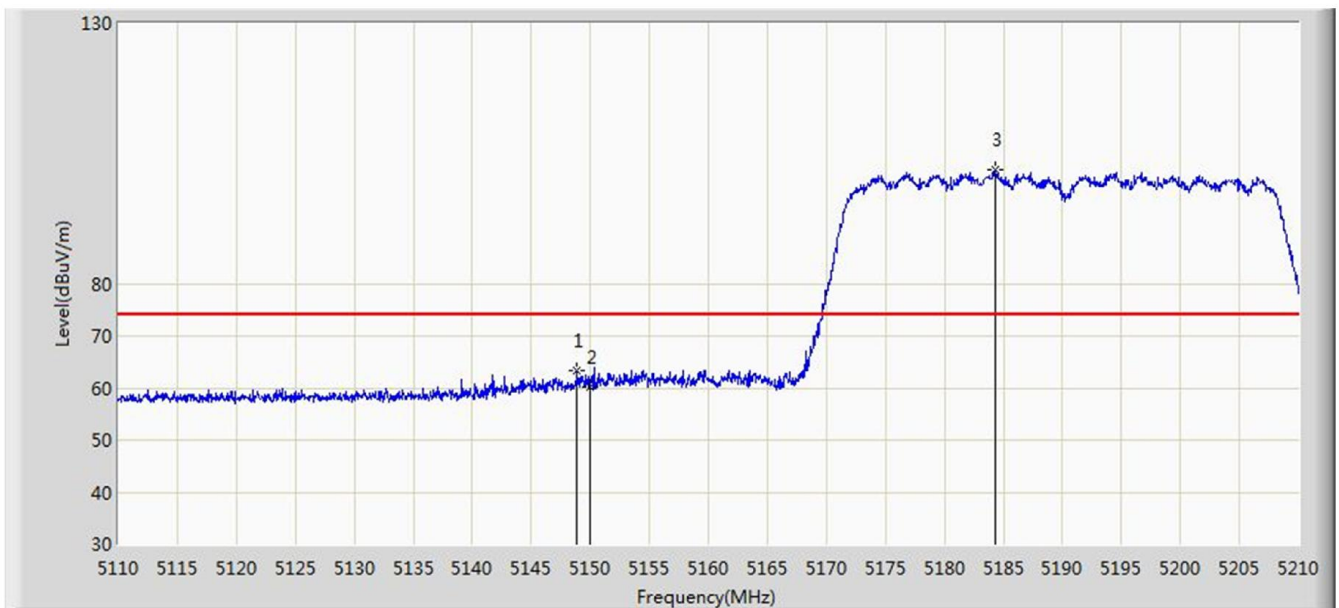


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5148.900	63.239	56.845	-10.761	74.000	6.393	PK
2			5150.000	60.244	53.847	-13.756	74.000	6.398	PK
3		*	5184.350	101.807	95.241	N/A	N/A	6.566	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/08/02 - 20:59
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIFI+BT Combo Module	Power: AC120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5190MHz	

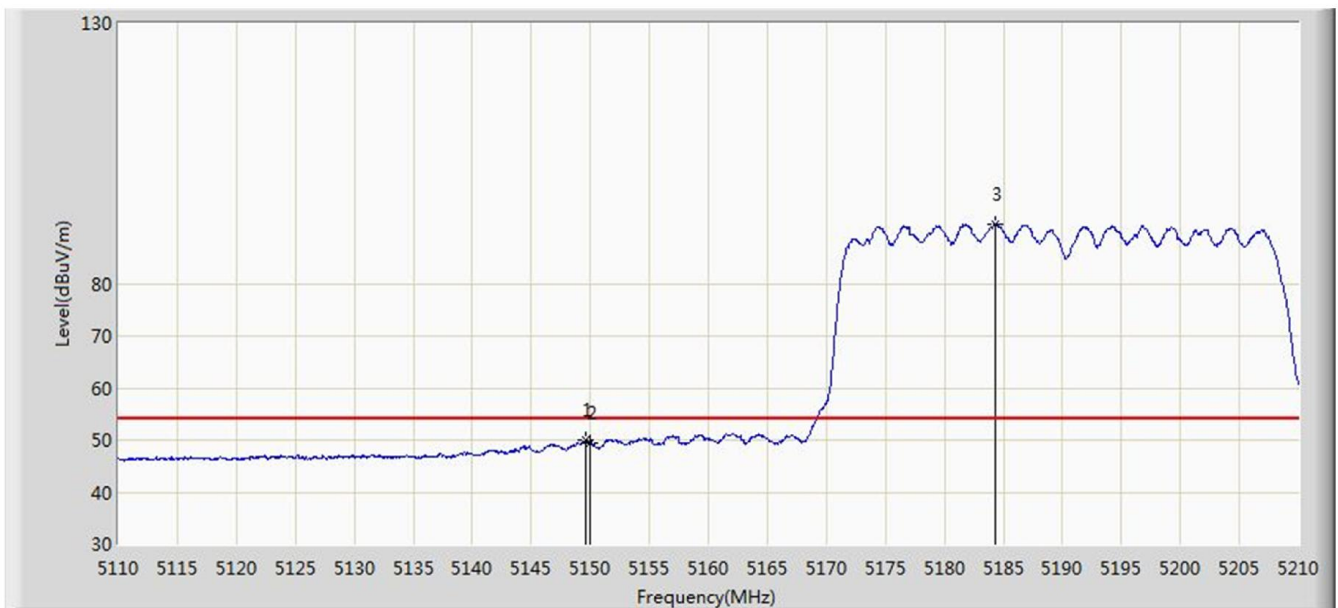

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5149.550	49.993	43.597	-4.007	54.000	6.396	AV
2			5150.000	49.501	43.104	-4.499	54.000	6.398	AV
3		*	5184.300	91.429	84.863	N/A	N/A	6.566	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)