


Site: AC1	Time: 2020/06/20 - 00:55
Limit: FCC_Part15.209_RE(3m)	Engineer: Buter Shi
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIFI+BT Combo Module	Power: By USB
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5500MHz	

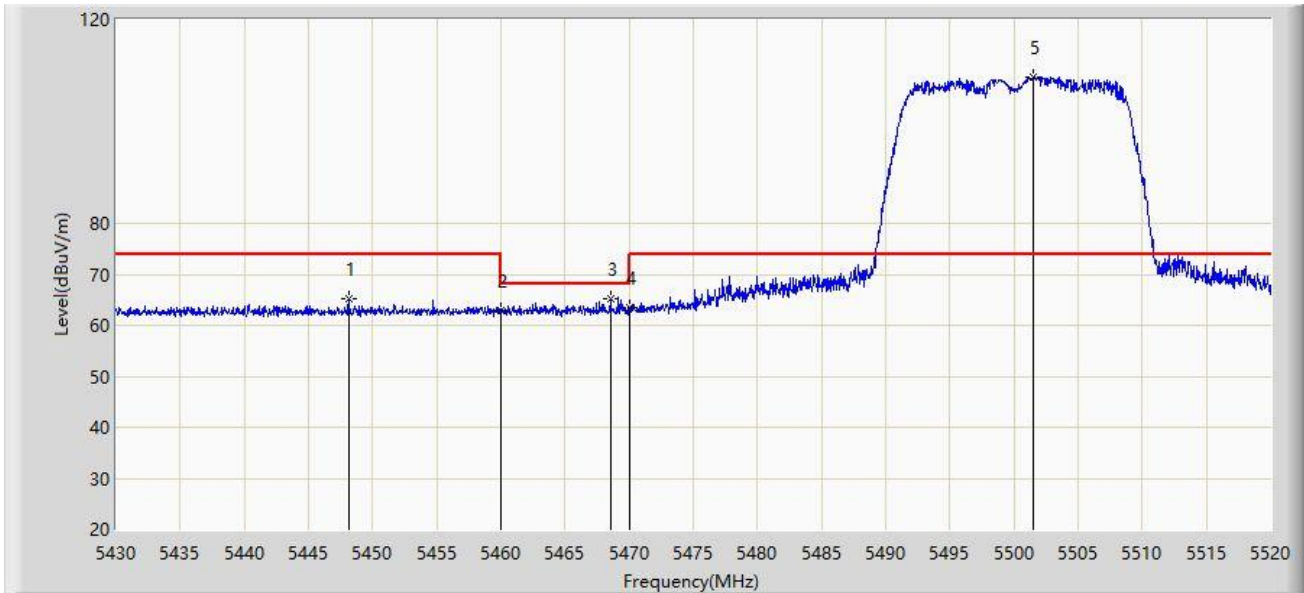


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5448.135	65.342	58.891	-8.658	74.000	6.451	PK
2			5460.000	62.783	56.297	-11.217	74.000	6.486	PK
3			5468.520	65.342	58.823	-2.858	68.200	6.519	PK
4			5470.000	63.441	56.916	-4.759	68.200	6.524	PK
5		*	5501.505	108.725	102.203	N/A	N/A	6.523	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/06/20 - 01:00
Limit: FCC_Part15.209_RE(3m)	Engineer: Buter Shi
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIFI+BT Combo Module	Power: By USB
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5500MHz	

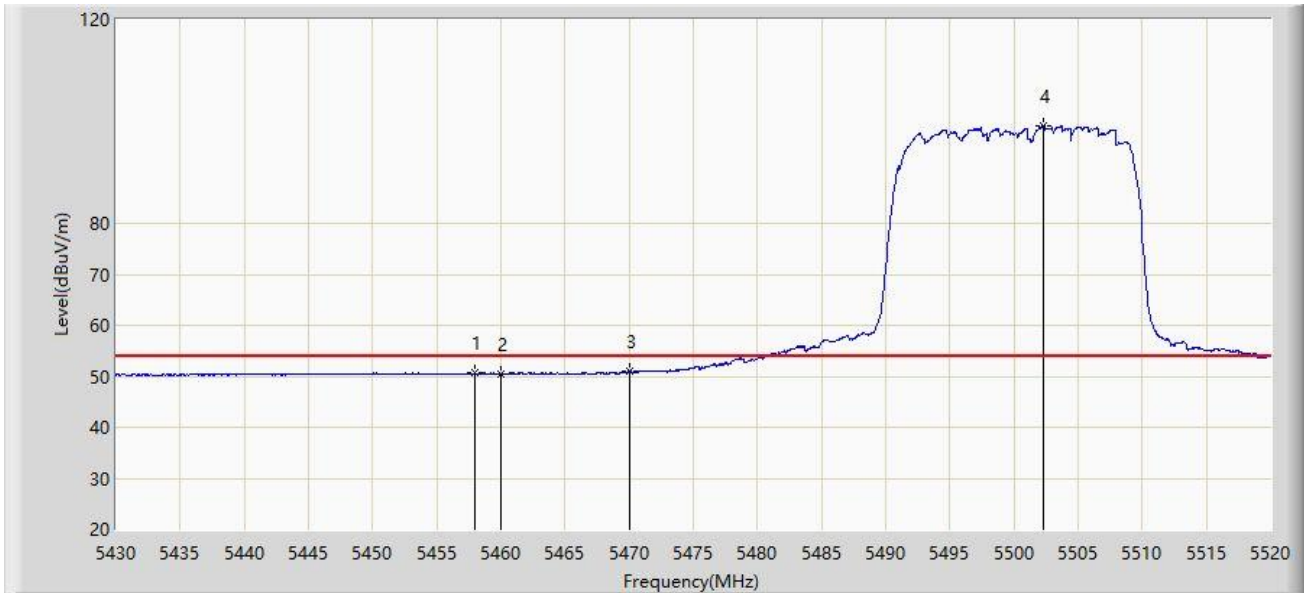


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5457.945	50.608	44.130	-3.392	54.000	6.477	AV
2			5460.000	50.488	44.002	-3.512	54.000	6.486	AV
3			5470.000	50.972	44.447	-3.028	54.000	6.524	AV
4		*	5502.270	99.038	92.513	N/A	N/A	6.524	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/06/20 - 01:04
Limit: FCC_Part15.209_RE(3m)	Engineer: Buter Shi
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIFI+BT Combo Module	Power: By USB
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5500MHz	

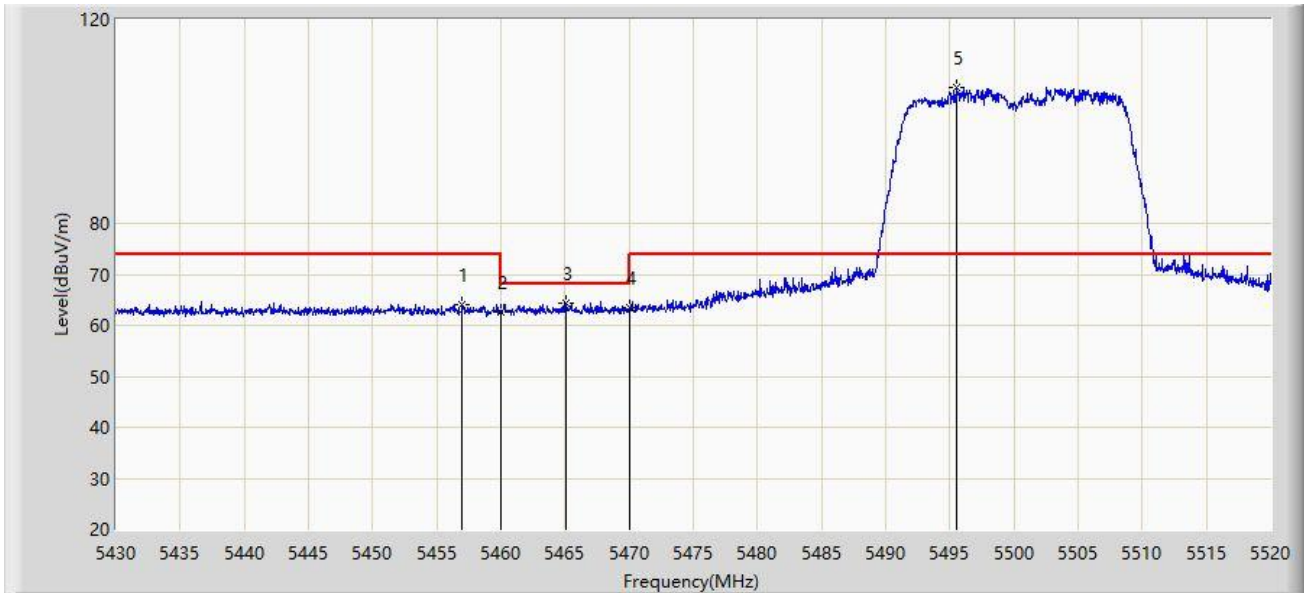


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5457.000	64.168	57.694	-9.832	74.000	6.474	PK
2			5460.000	62.725	56.239	-11.275	74.000	6.486	PK
3			5465.055	64.425	57.919	-3.775	68.200	6.506	PK
4			5470.000	63.469	56.944	-4.731	68.200	6.524	PK
5		*	5495.475	106.696	100.200	N/A	N/A	6.496	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/06/20 - 01:03
Limit: FCC_Part15.209_RE(3m)	Engineer: Buter Shi
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIFI+BT Combo Module	Power: By USB
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5500MHz	

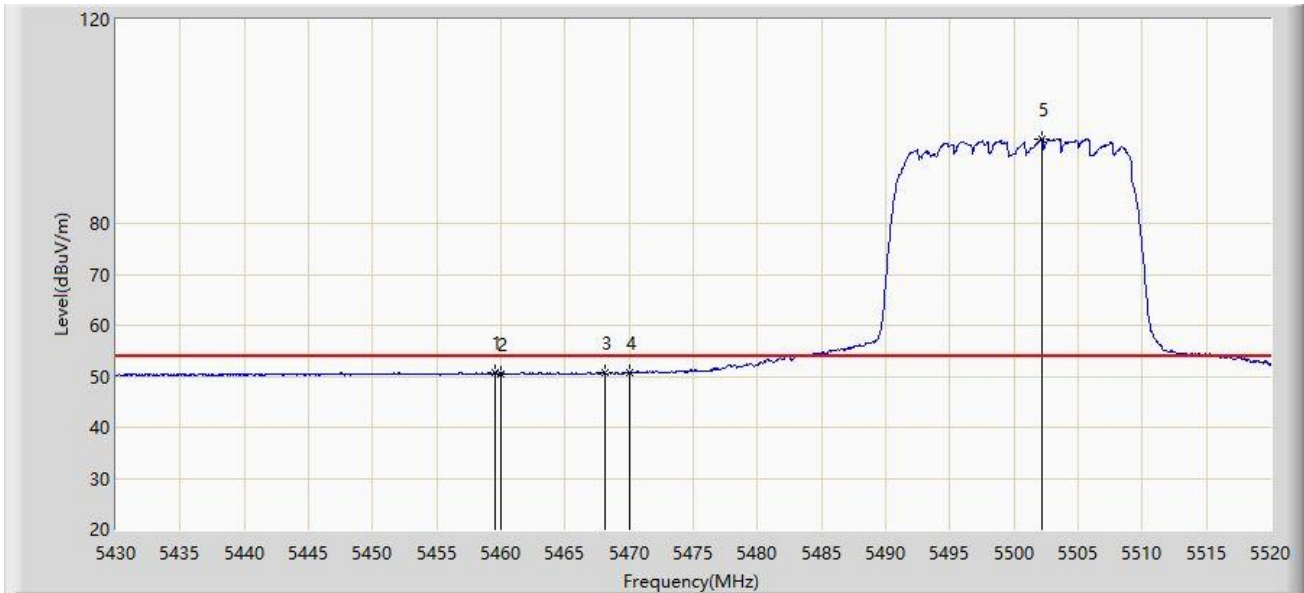


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5459.565	50.726	44.242	-3.274	54.000	6.484	AV
2			5460.000	50.483	43.997	-3.517	54.000	6.486	AV
3			5468.070	50.821	44.304	-3.179	54.000	6.518	AV
4			5470.000	50.668	44.143	-3.332	54.000	6.524	AV
5		*	5502.225	96.573	90.048	N/A	N/A	6.525	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/08/13 - 22:18
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIFI+BT Combo Module	Power: By USB
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5700MHz	

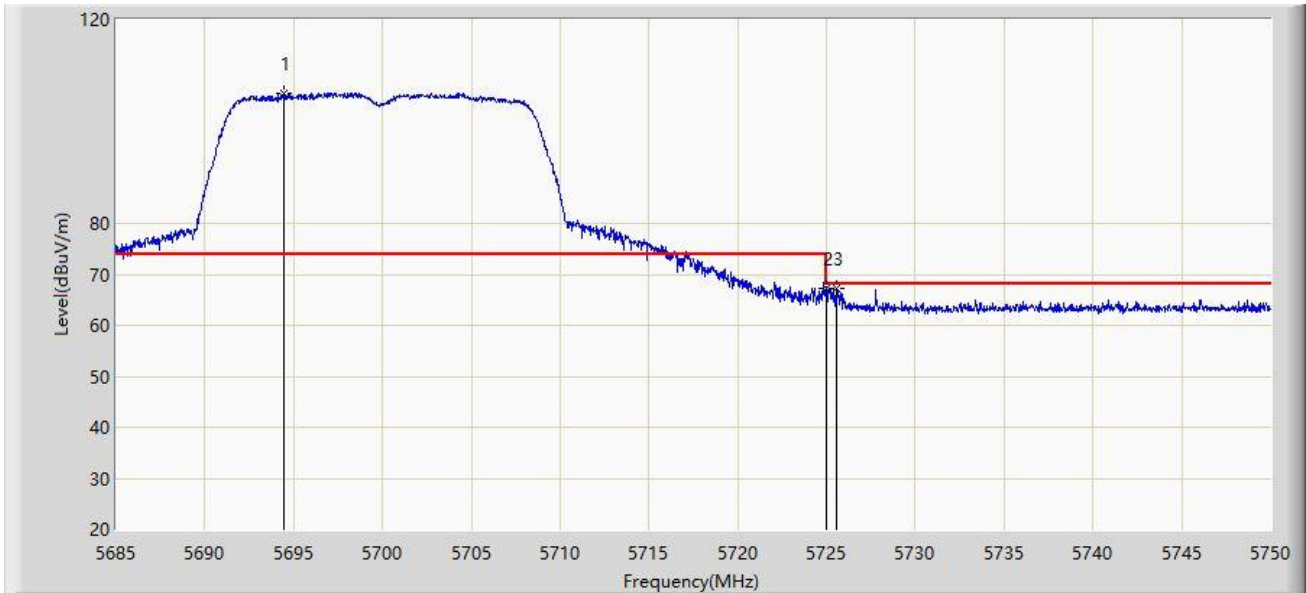


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5694.458	105.620	99.233	N/A	N/A	6.386	PK
2			5725.000	67.162	60.738	-1.038	68.200	6.424	PK
3			5725.527	67.258	60.823	-0.942	68.200	6.435	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/06/20 - 01:48
Limit: FCC_Part15.209_RE(3m)	Engineer: Buter Shi
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIFI+BT Combo Module	Power: By USB
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5700MHz	

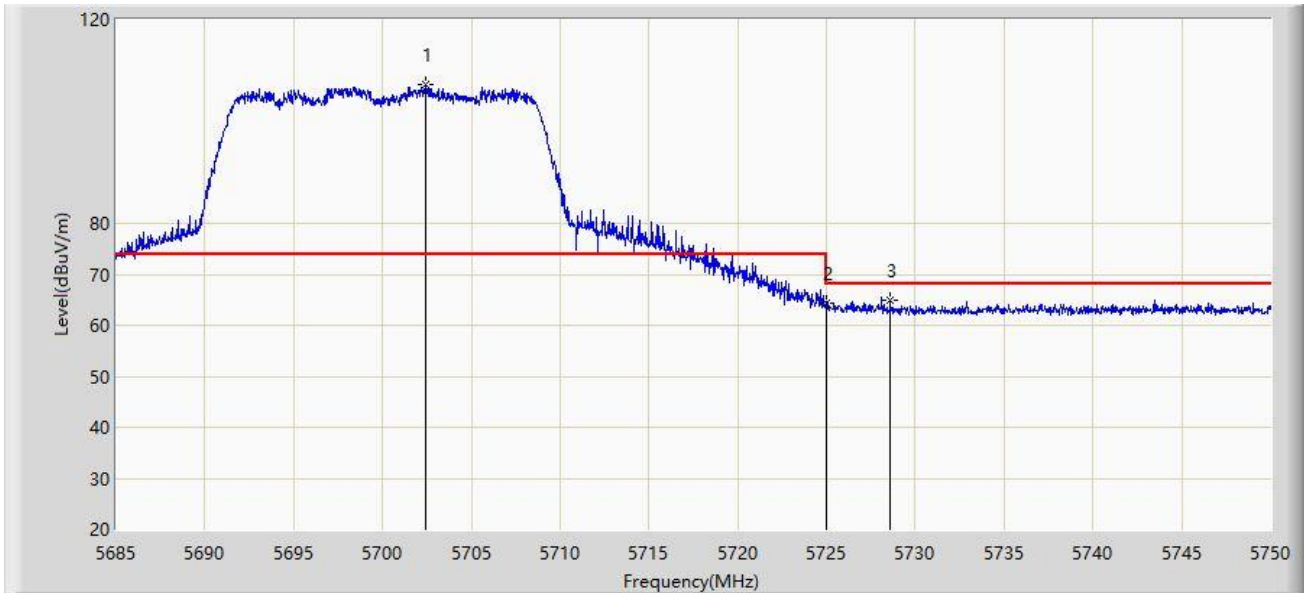


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5702.453	107.315	100.873	N/A	N/A	6.443	PK
2			5725.000	64.255	57.831	-3.945	68.200	6.424	PK
3			5728.583	64.991	58.498	-3.209	68.200	6.493	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/06/20 - 01:50
Limit: FCC_Part15.407_RE(3m)	Engineer: Buter Shi
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIFI+BT Combo Module	Power: By USB
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5745MHz	

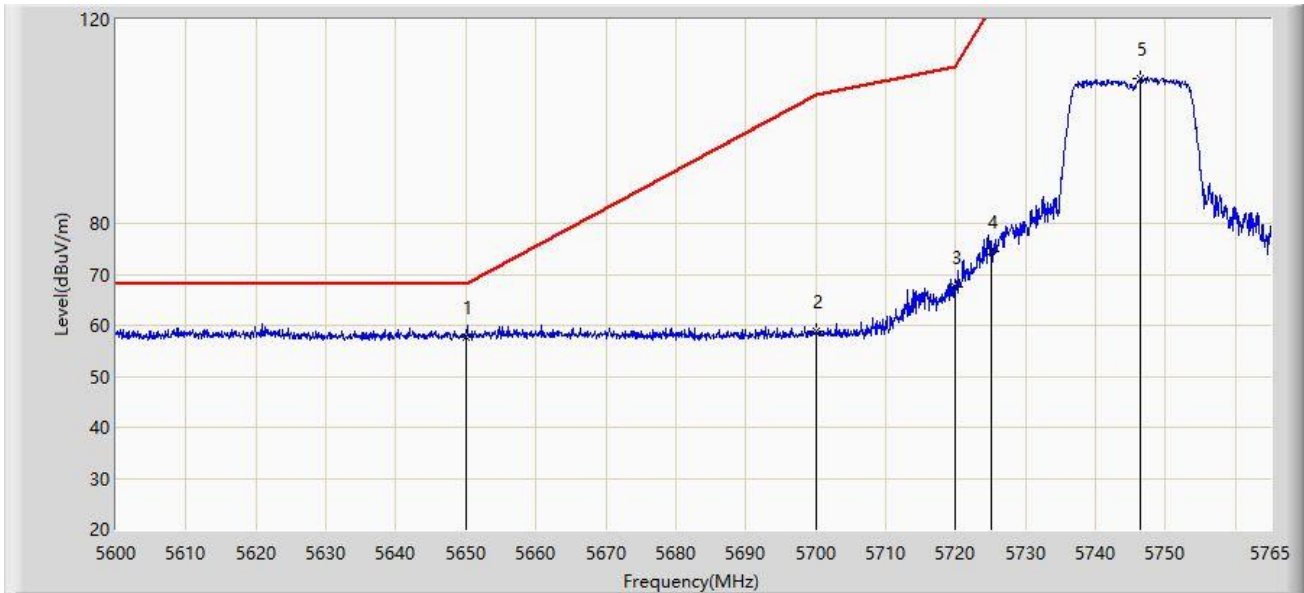


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5650.000	57.549	51.290	-10.651	68.200	6.258	PK
2			5700.000	58.724	52.299	-46.476	105.200	6.426	PK
3			5720.000	67.509	61.124	-43.291	110.800	6.386	PK
4			5725.000	74.496	68.072	-47.704	122.200	6.424	PK
5			5746.437	108.377	101.603	N/A	N/A	6.774	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/06/20 - 01:54
Limit: FCC_Part15.407_RE(3m)	Engineer: Buter Shi
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIFI+BT Combo Module	Power: By USB
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5745MHz	

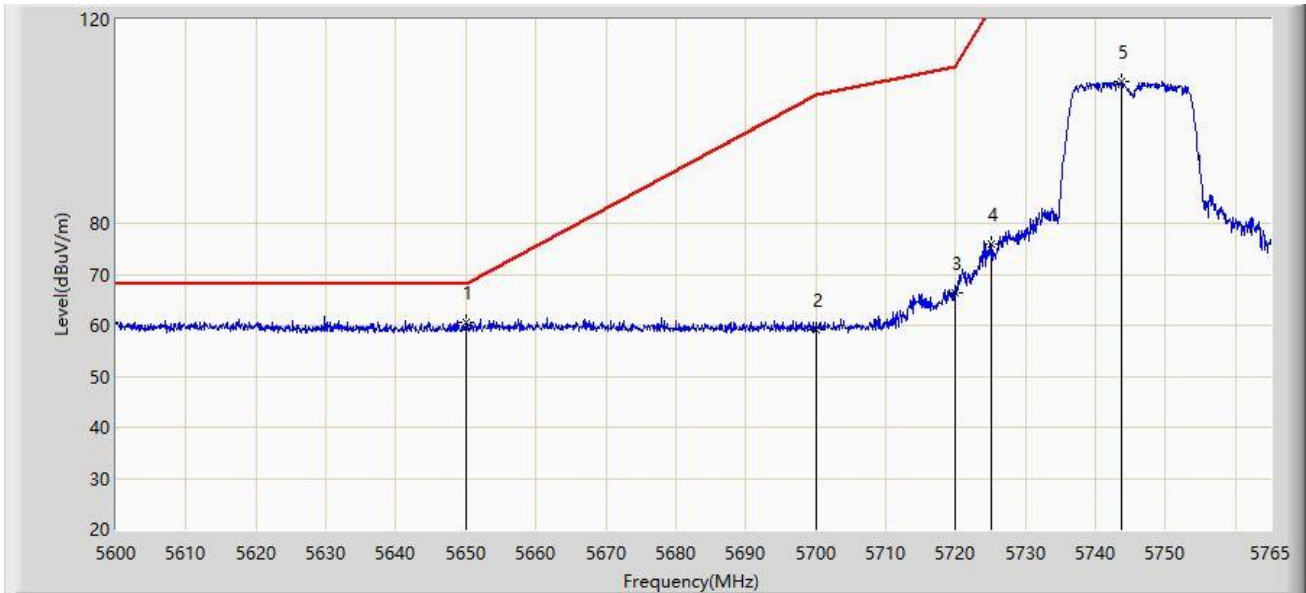


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5650.000	60.467	54.208	-7.733	68.200	6.258	PK
2			5700.000	59.228	52.803	-45.972	105.200	6.426	PK
3			5720.000	66.396	60.011	-44.404	110.800	6.386	PK
4			5725.000	76.007	69.583	-46.193	122.200	6.424	PK
5			5743.632	107.742	100.986	N/A	N/A	6.757	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/06/20 - 02:16
Limit: FCC_Part15.407_RE(3m)	Engineer: Buter Shi
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIFI+BT Combo Module	Power: By USB
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5825MHz	

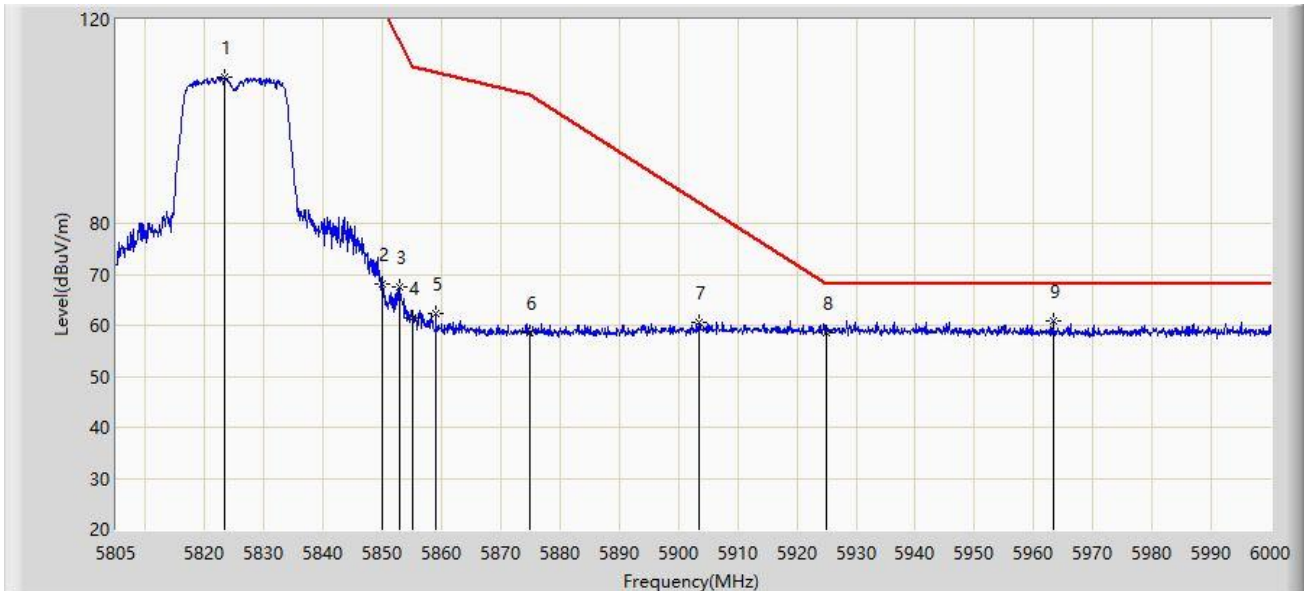


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5823.428	108.810	101.799	N/A	N/A	7.011	PK
2			5850.000	68.128	61.320	-54.072	122.200	6.808	PK
3			5852.970	67.401	60.586	-48.026	115.427	6.815	PK
4			5855.000	61.571	54.751	-49.229	110.800	6.820	PK
5			5859.015	62.428	55.599	-47.246	109.674	6.830	PK
6			5875.000	58.584	51.666	-46.616	105.200	6.918	PK
7			5903.377	60.631	53.560	-23.532	84.163	7.071	PK
8			5925.000	58.600	51.503	-9.600	68.200	7.097	PK
9		*	5963.340	61.009	54.078	-7.191	68.200	6.932	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/06/20 - 02:19
Limit: FCC_Part15.407_RE(3m)	Engineer: Buter Shi
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIFI+BT Combo Module	Power: By USB
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5825MHz	

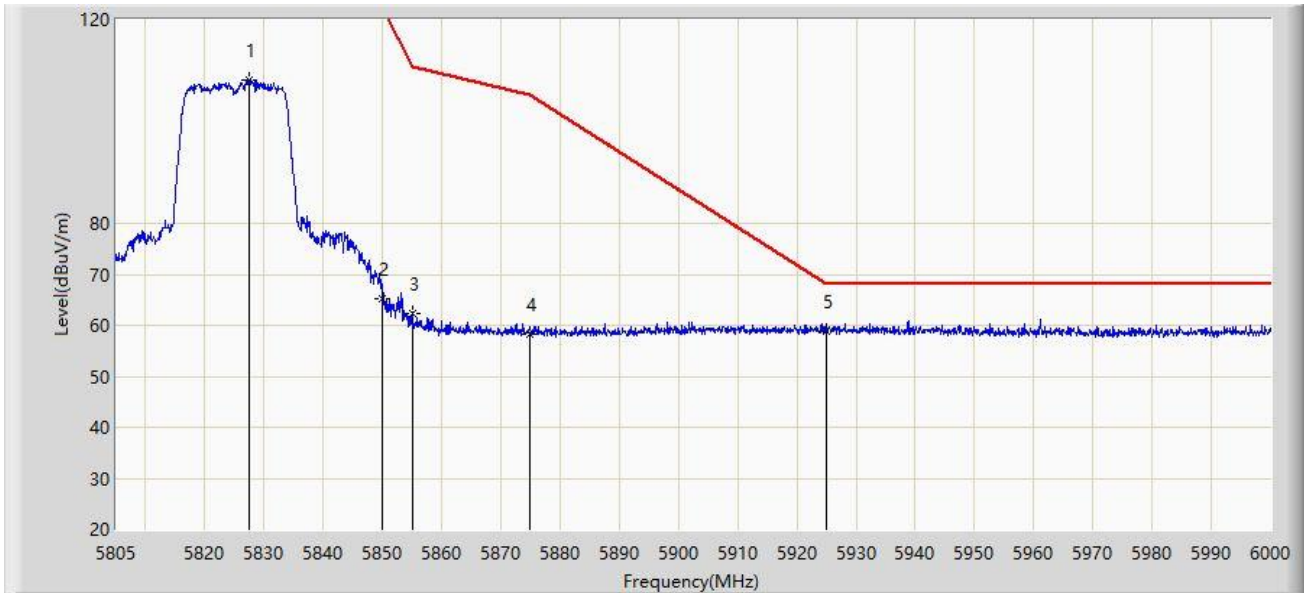


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5827.522	108.049	100.970	N/A	N/A	7.080	PK
2			5850.000	65.287	58.479	-56.913	122.200	6.808	PK
3			5855.000	62.296	55.476	-48.504	110.800	6.820	PK
4			5875.000	58.238	51.320	-46.962	105.200	6.918	PK
5		*	5925.000	58.821	51.724	-9.379	68.200	7.097	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/06/20 - 02:34
Limit: FCC_Part15.209_RE(3m)	Engineer: Buter Shi
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIFI+BT Combo Module	Power: By USB
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz	

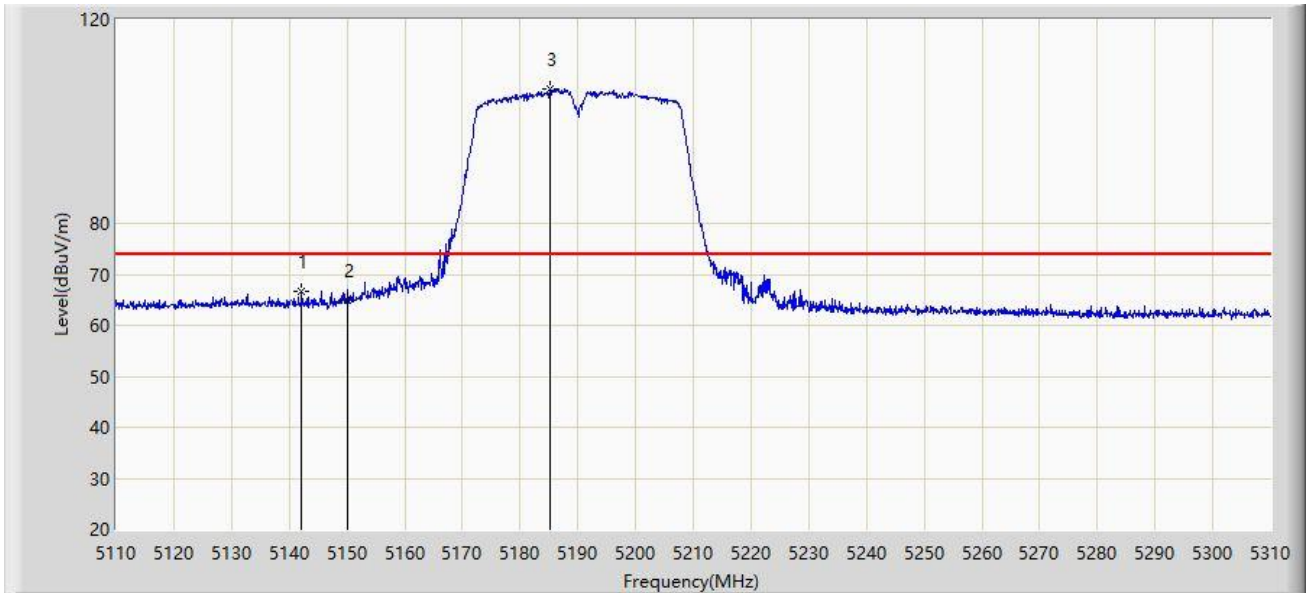


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5142.200	66.679	60.123	-7.321	74.000	6.556	PK
2			5150.000	65.006	58.554	-8.994	74.000	6.452	PK
3		*	5185.200	106.264	99.753	N/A	N/A	6.511	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/06/20 - 02:41
Limit: FCC_Part15.209_RE(3m)	Engineer: Buter Shi
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIFI+BT Combo Module	Power: By USB
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz	

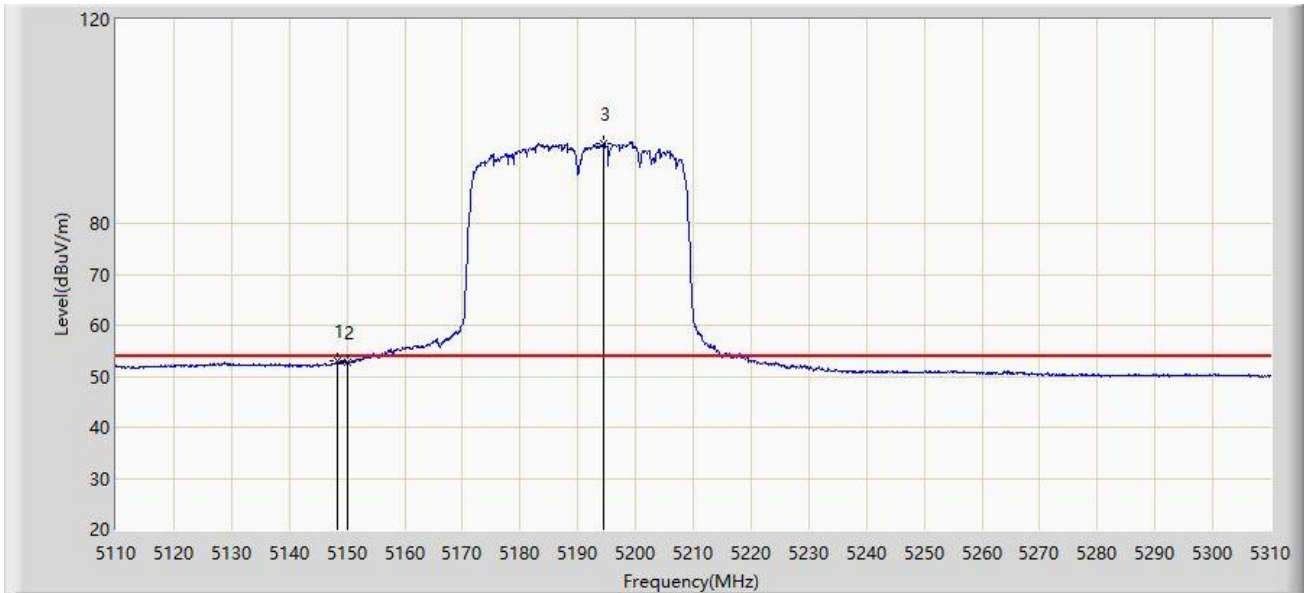


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5148.400	52.961	46.507	-1.039	54.000	6.454	AV
2			5150.000	52.701	46.249	-1.299	54.000	6.452	AV
3		*	5194.400	95.636	89.242	N/A	N/A	6.395	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/06/20 - 02:44
Limit: FCC_Part15.209_RE(3m)	Engineer: Buter Shi
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIFI+BT Combo Module	Power: By USB
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz	

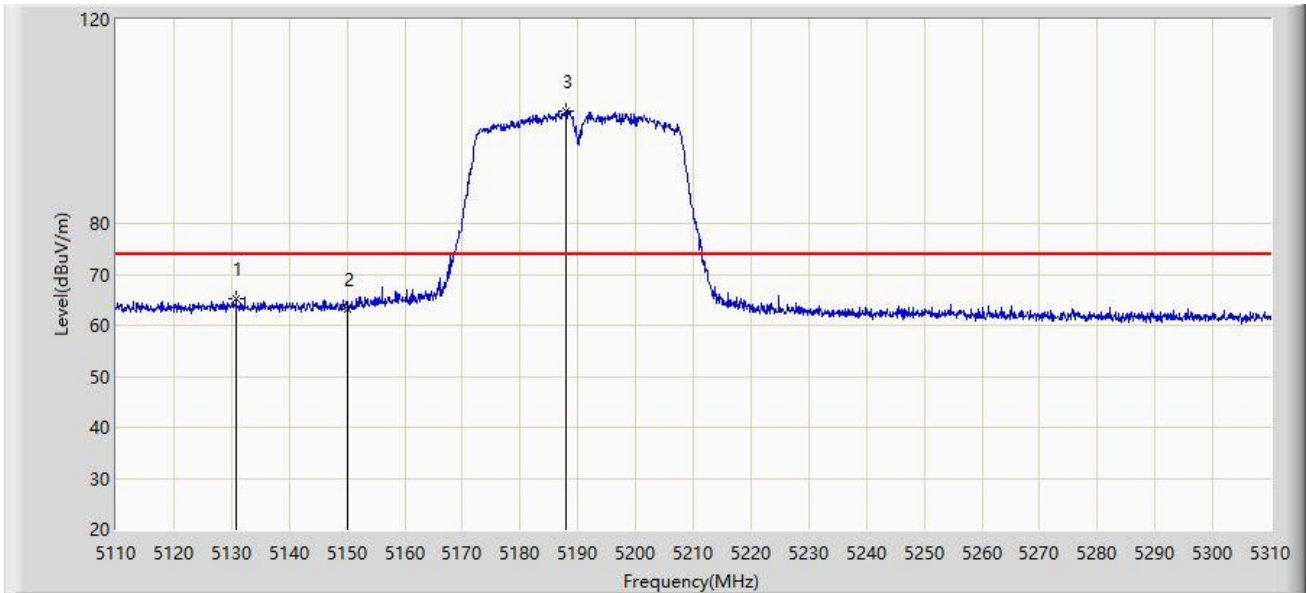


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5130.800	65.356	58.603	-8.644	74.000	6.753	PK
2			5150.000	63.171	56.719	-10.829	74.000	6.452	PK
3		*	5187.900	102.144	95.667	N/A	N/A	6.477	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/06/20 - 02:43
Limit: FCC_Part15.209_RE(3m)	Engineer: Buter Shi
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIFI+BT Combo Module	Power: By USB
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz	

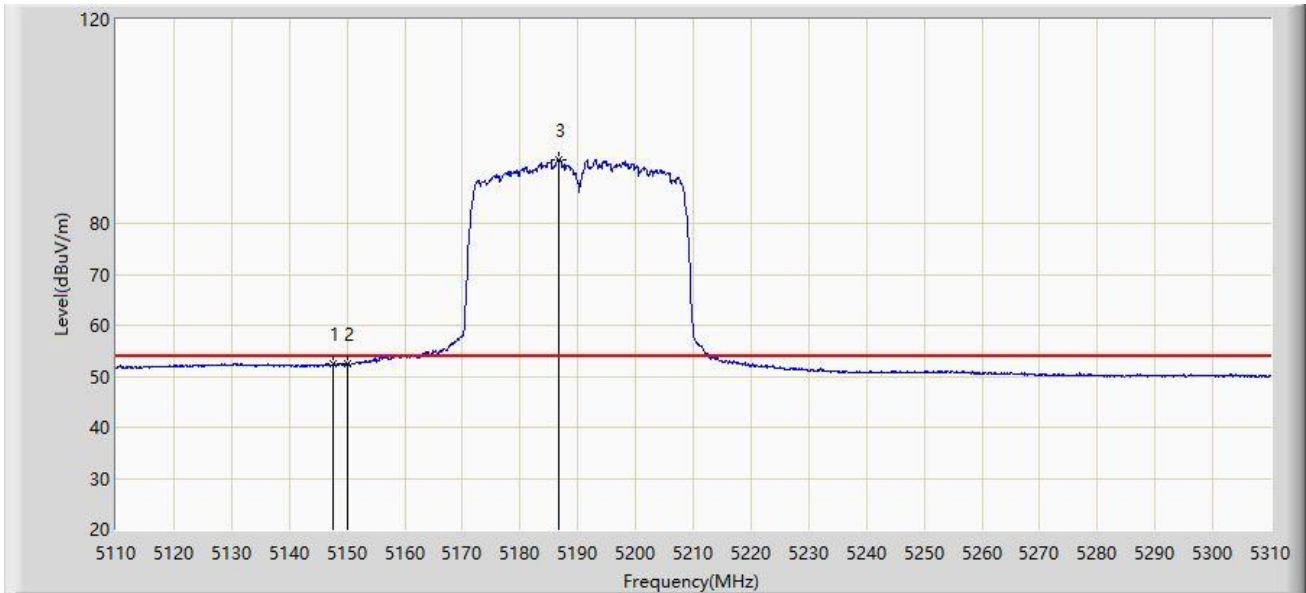


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5147.700	52.568	46.109	-1.432	54.000	6.459	AV
2			5150.000	52.456	46.004	-1.544	54.000	6.452	AV
3		*	5186.700	92.526	86.034	N/A	N/A	6.493	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/06/20 - 02:46
Limit: FCC_Part15.209_RE(3m)	Engineer: Buter Shi
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIFI+BT Combo Module	Power: By USB
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5310MHz	

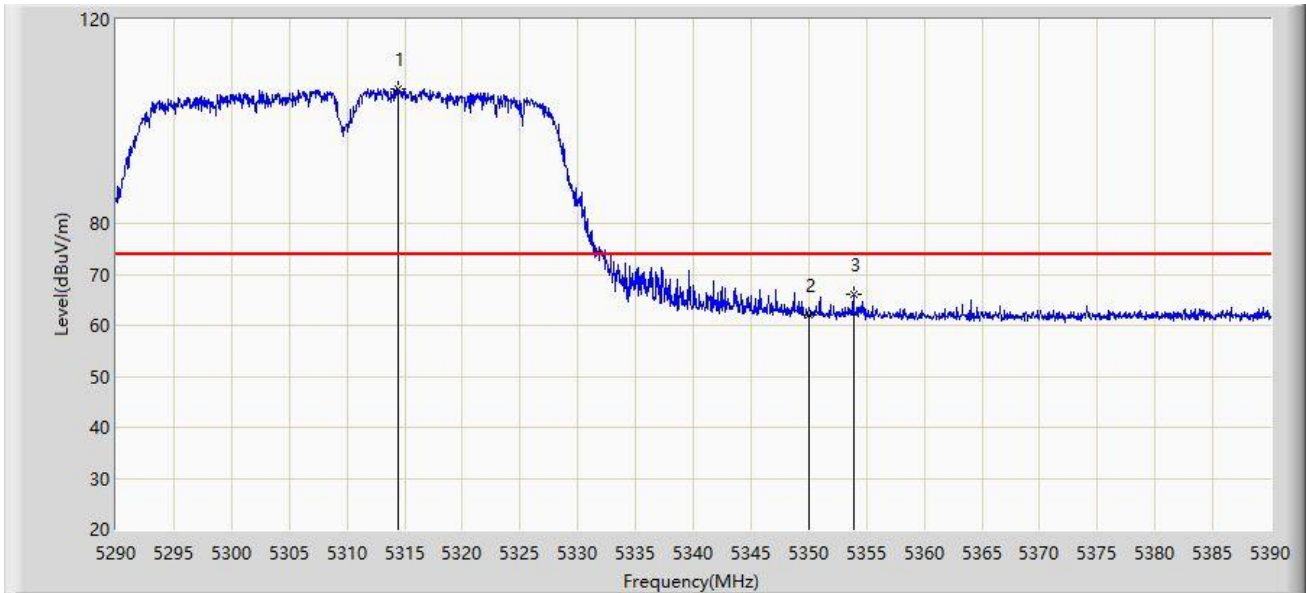


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5314.450	106.497	100.473	N/A	N/A	6.024	PK
2			5350.000	61.903	55.445	-12.097	74.000	6.458	PK
3			5353.850	66.095	59.748	-7.905	74.000	6.346	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/06/20 - 02:49
Limit: FCC_Part15.209_RE(3m)	Engineer: Buter Shi
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIFI+BT Combo Module	Power: By USB
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5310MHz	

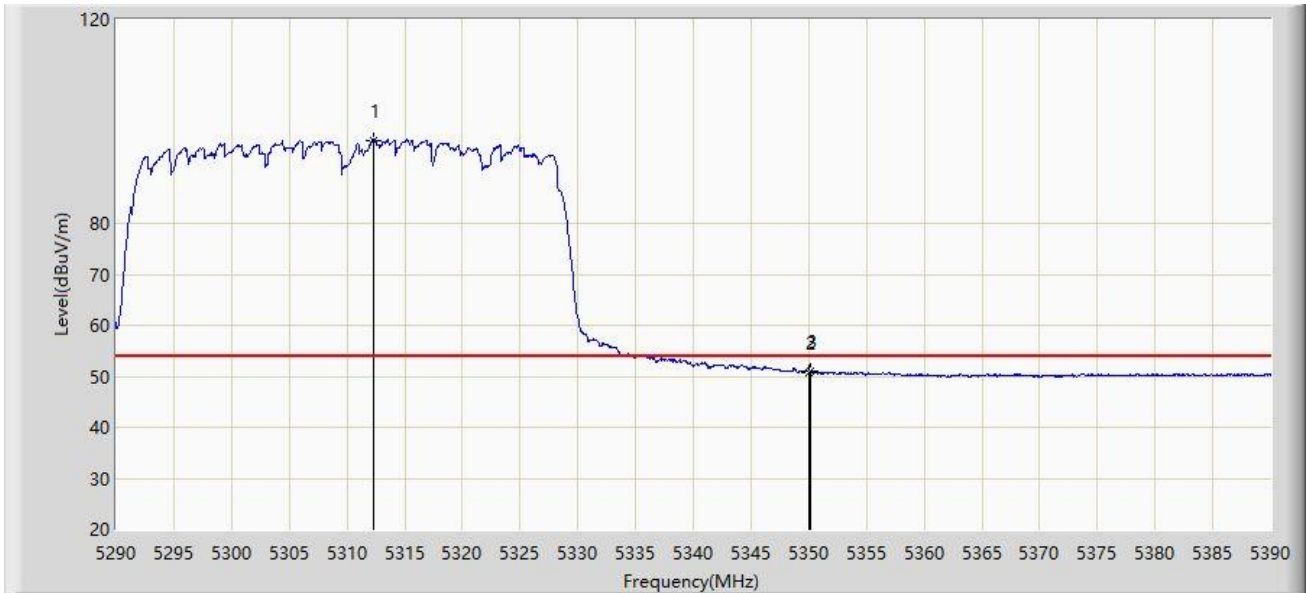


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5312.250	96.292	90.315	N/A	N/A	5.977	AV
2			5350.000	50.782	44.324	-3.218	54.000	6.458	AV
3			5350.200	51.113	44.661	-2.887	54.000	6.452	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/06/20 - 02:51
Limit: FCC_Part15.209_RE(3m)	Engineer: Buter Shi
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIFI+BT Combo Module	Power: By USB
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5310MHz	

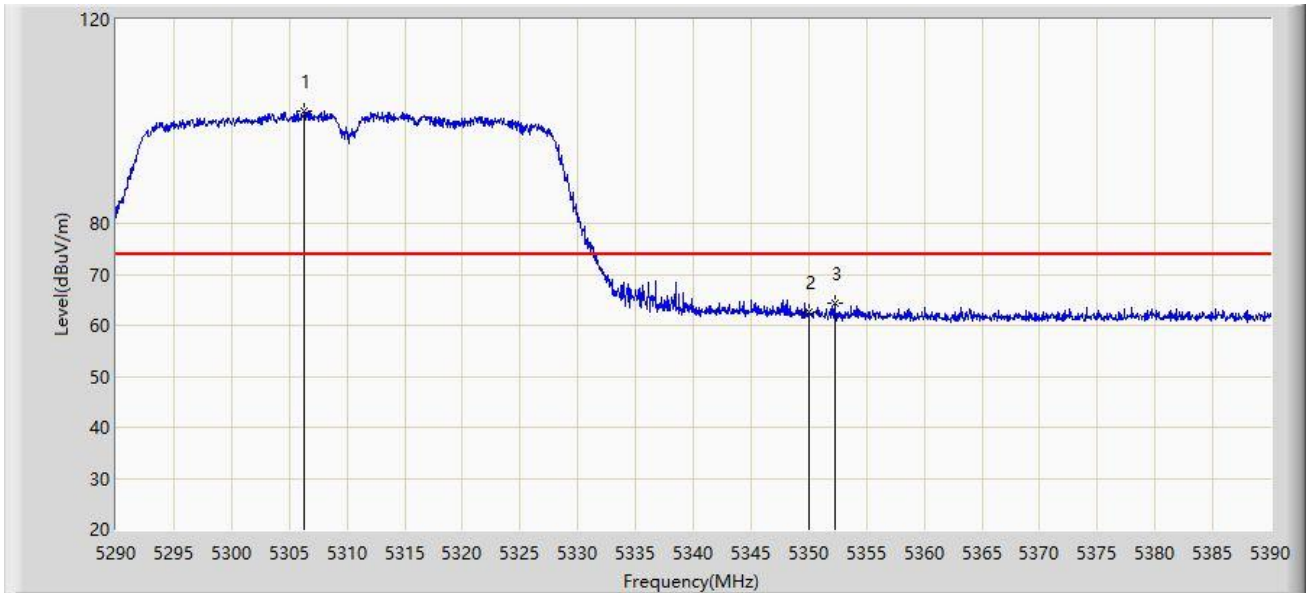


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5306.350	101.900	95.963	N/A	N/A	5.937	PK
2			5350.000	62.599	56.141	-11.401	74.000	6.458	PK
3			5352.250	64.359	57.971	-9.641	74.000	6.388	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/06/20 - 02:50
Limit: FCC_Part15.209_RE(3m)	Engineer: Buter Shi
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIFI+BT Combo Module	Power: By USB
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5310MHz	

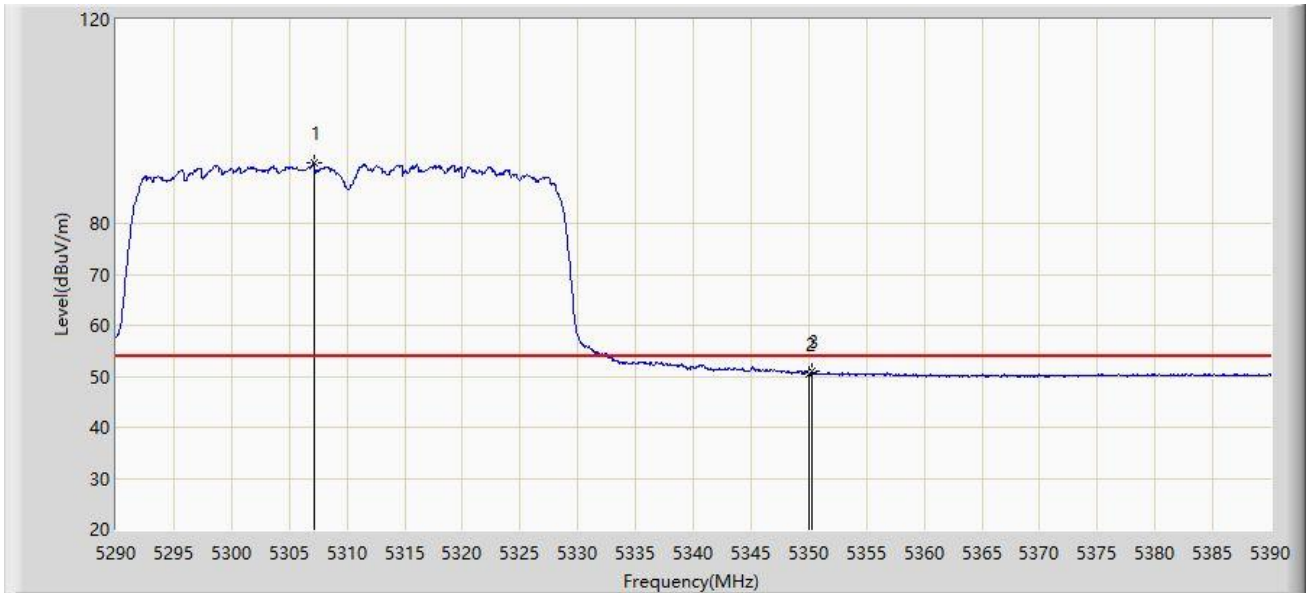


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5307.150	91.962	86.029	N/A	N/A	5.933	AV
2			5350.000	50.526	44.068	-3.474	54.000	6.458	AV
3			5350.250	50.989	44.539	-3.011	54.000	6.450	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/08/13 - 22:29
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIFI+BT Combo Module	Power: By USB
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5510MHz	

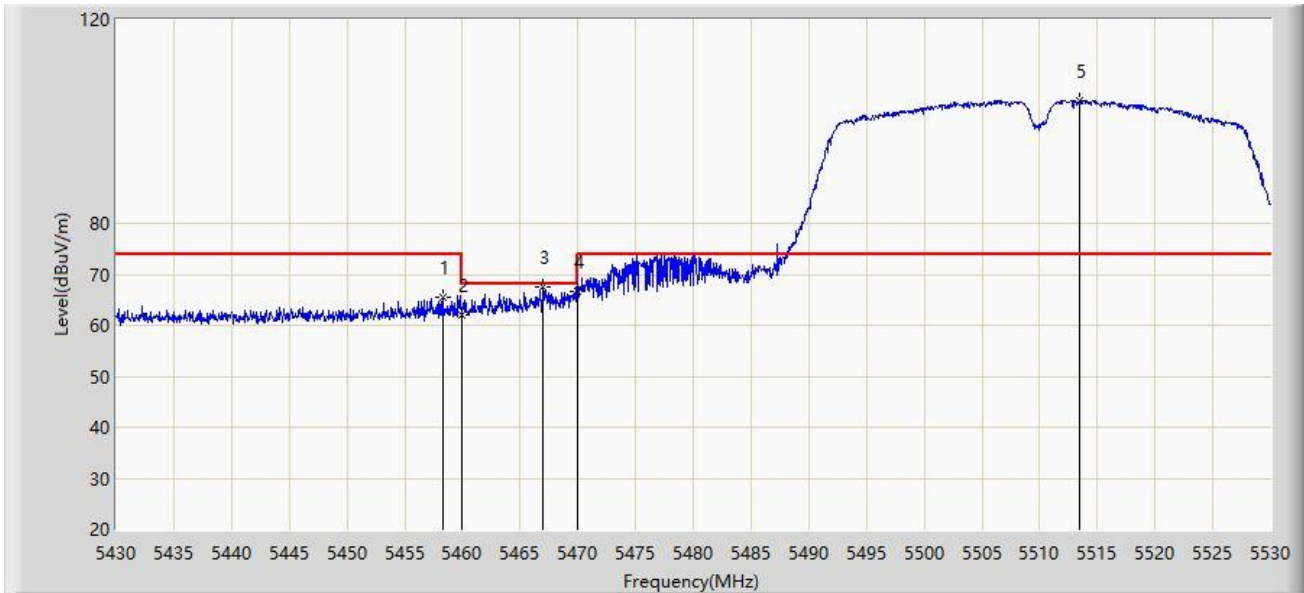


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5458.300	65.646	59.167	-8.354	74.000	6.479	PK
2			5460.000	62.069	55.583	-11.931	74.000	6.486	PK
3			5467.000	67.670	61.157	-0.530	68.200	6.514	PK
4			5470.000	66.764	60.239	-1.436	68.200	6.524	PK
5		*	5513.450	104.028	97.592	30.028	74.000	6.436	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/08/13 - 22:32
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIFI+BT Combo Module	Power: By USB
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5510MHz	

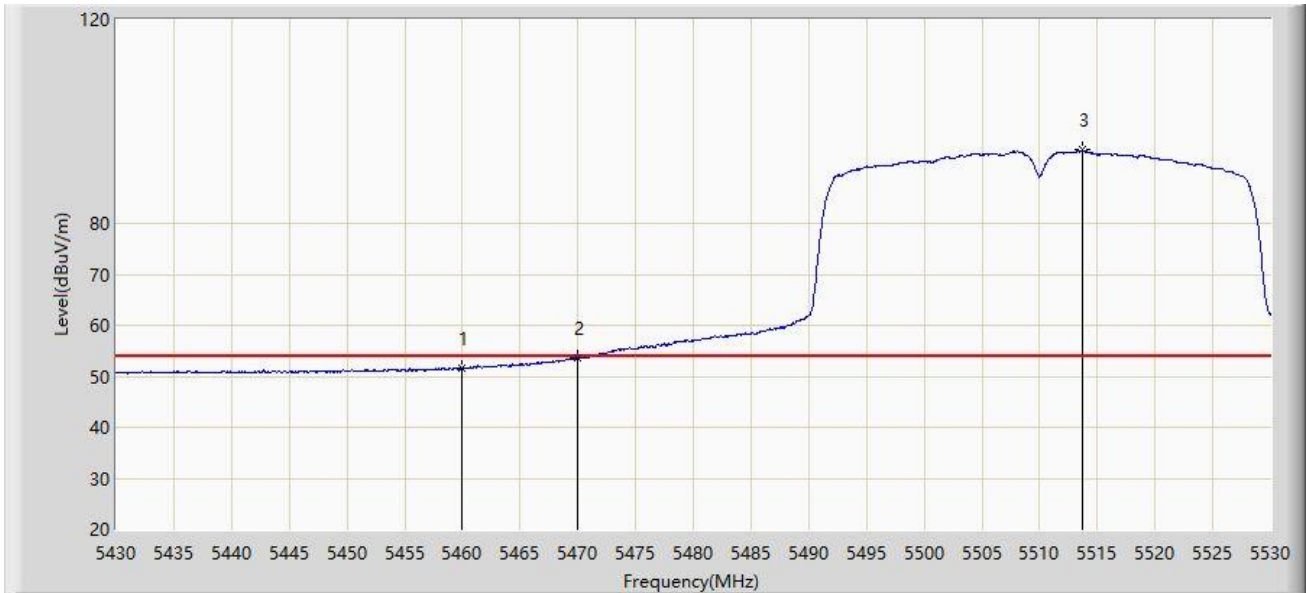


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	51.632	45.146	-2.368	54.000	6.486	AV
2			5470.000	53.495	46.970	-0.505	54.000	6.524	AV
3		*	5513.750	94.383	87.950	40.383	54.000	6.433	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/08/13 - 22:33
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIFI+BT Combo Module	Power: By USB
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5510MHz	

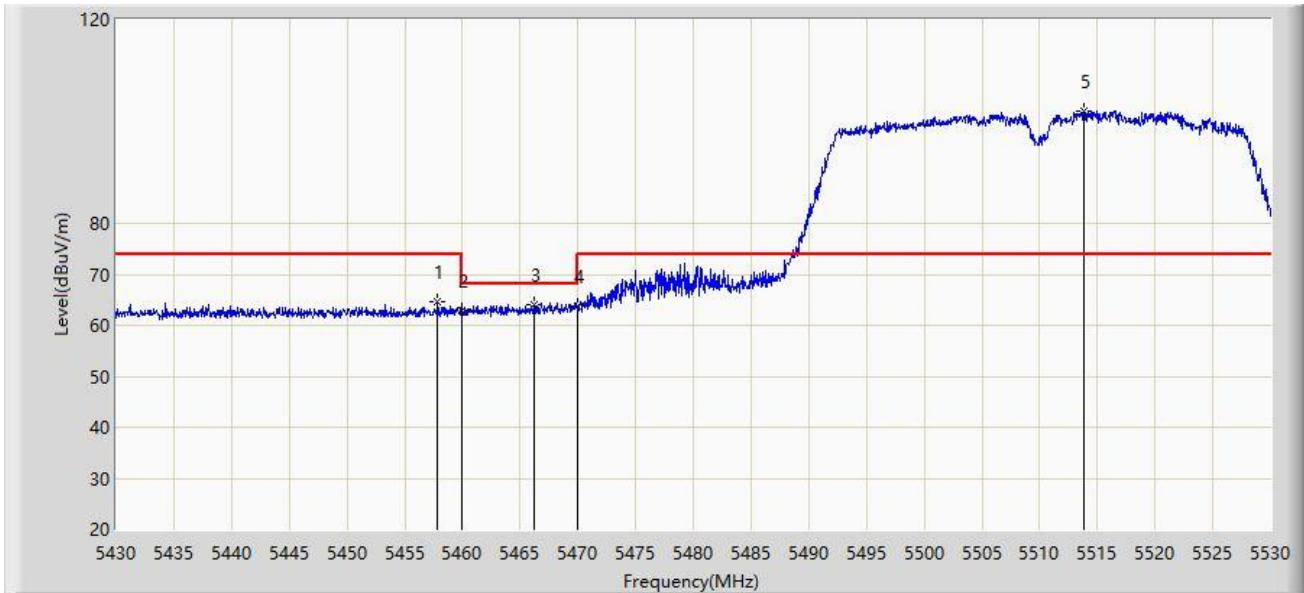


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5457.850	64.521	58.044	-9.479	74.000	6.477	PK
2			5460.000	63.025	56.539	-10.975	74.000	6.486	PK
3			5466.250	64.130	57.620	-4.070	68.200	6.510	PK
4			5470.000	63.839	57.314	-4.361	68.200	6.524	PK
5		*	5513.850	101.991	95.559	27.991	74.000	6.432	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)


Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/08/13 - 22:35
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIFI+BT Combo Module	Power: By USB
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5510MHz	

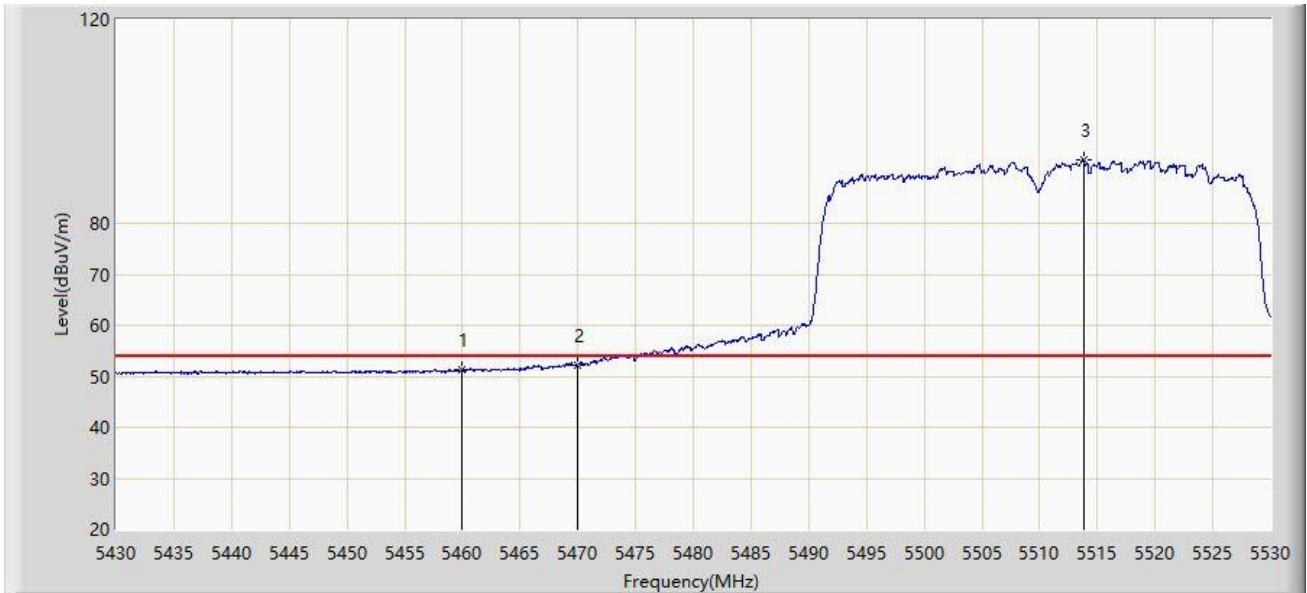

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	51.193	44.707	-2.807	54.000	6.486	AV
2			5470.000	52.310	45.785	-1.690	54.000	6.524	AV
3		*	5513.800	92.544	86.111	38.544	54.000	6.432	AV

Site: AC1	Time: 2020/06/20 - 03:02
Limit: FCC_Part15.209_RE(3m)	Engineer: Buter Shi
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIFI+BT Combo Module	Power: By USB
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5670MHz	

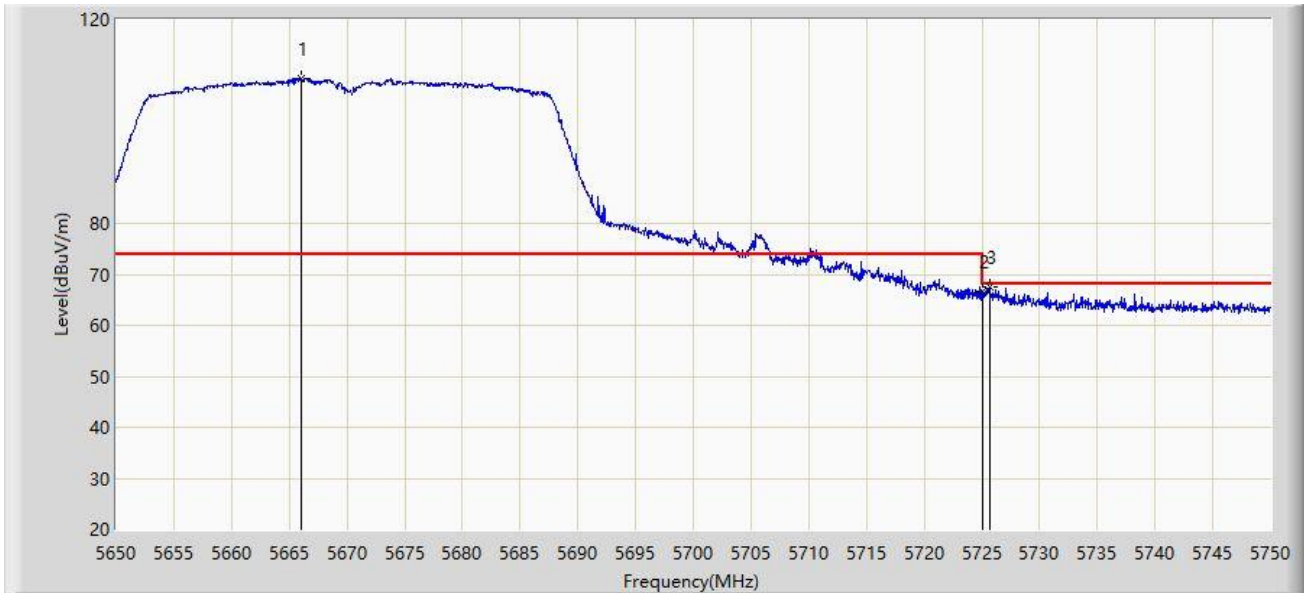


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5666.050	108.455	102.068	N/A	N/A	6.387	PK
2			5725.000	66.683	60.259	-1.517	68.200	6.424	PK
3			5725.650	67.394	60.957	-0.806	68.200	6.437	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/06/20 - 03:07
Limit: FCC_Part15.209_RE(3m)	Engineer: Buter Shi
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIFI+BT Combo Module	Power: By USB
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5670MHz	

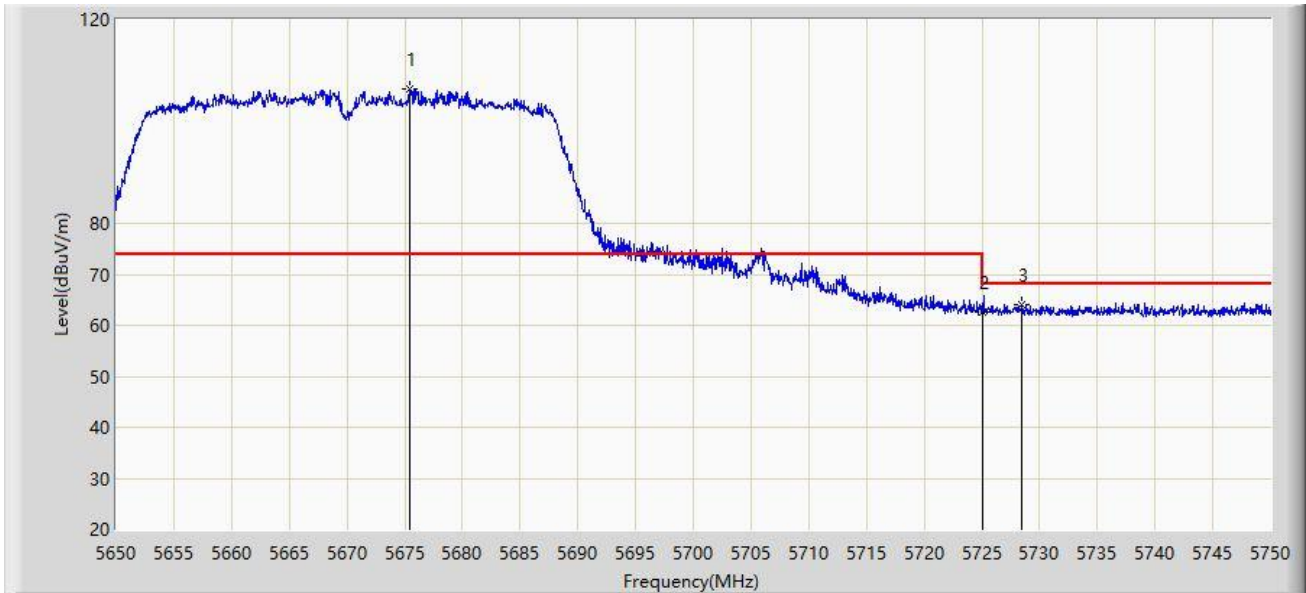


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5675.450	106.255	99.573	N/A	N/A	6.682	PK
2			5725.000	62.490	56.066	-5.710	68.200	6.424	PK
3			5728.500	63.976	57.485	-4.224	68.200	6.492	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/06/20 - 03:09
Limit: FCC_Part15.407_RE(3m)	Engineer: Buter Shi
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIFI+BT Combo Module	Power: By USB
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5755MHz	

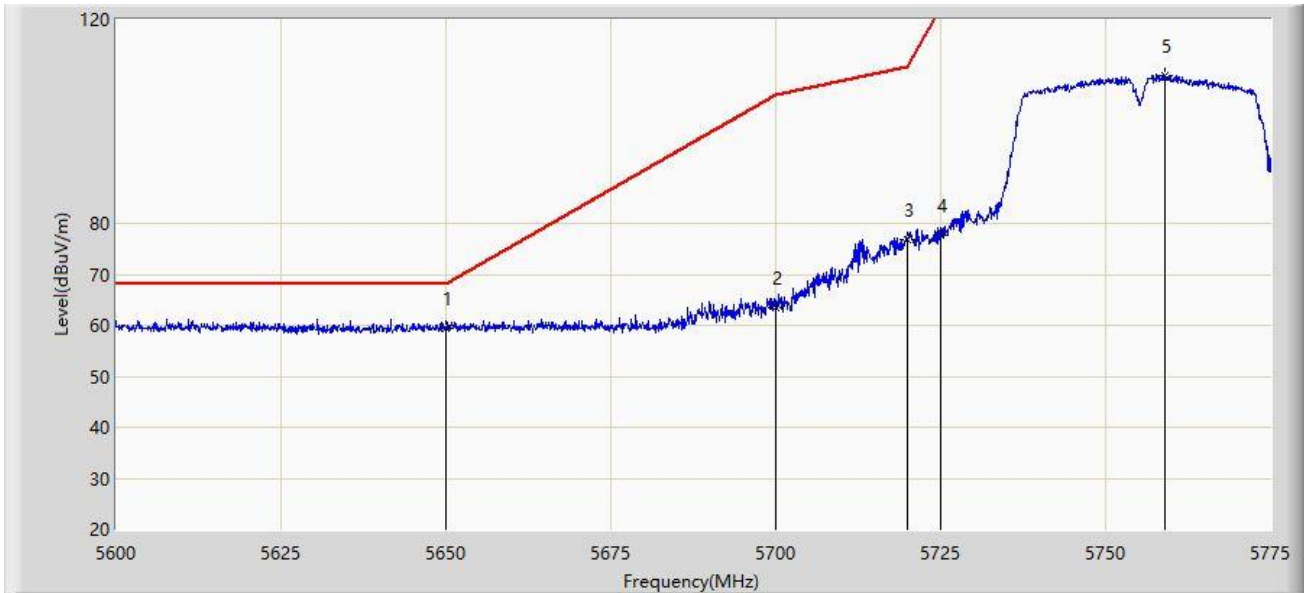


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5650.000	59.478	53.219	-8.722	68.200	6.258	PK
2			5700.000	63.581	57.156	-41.619	105.200	6.426	PK
3			5720.000	76.869	70.484	-33.931	110.800	6.386	PK
4			5725.000	77.786	71.362	-44.414	122.200	6.424	PK
5			5758.900	109.038	102.130	N/A	N/A	6.909	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/06/20 - 03:10
Limit: FCC_Part15.407_RE(3m)	Engineer: Buter Shi
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIFI+BT Combo Module	Power: By USB
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5755MHz	

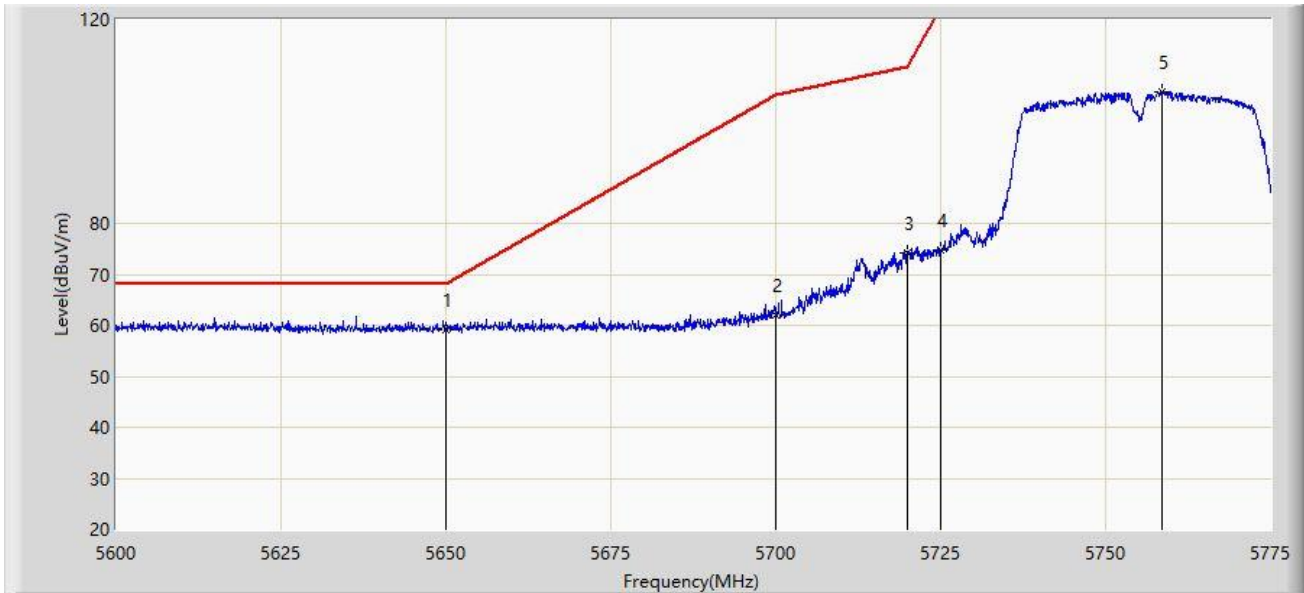


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5650.000	59.070	52.811	-9.130	68.200	6.258	PK
2			5700.000	62.005	55.580	-43.195	105.200	6.426	PK
3			5720.000	74.296	67.911	-36.504	110.800	6.386	PK
4			5725.000	74.787	68.363	-47.413	122.200	6.424	PK
5			5758.638	105.917	99.009	N/A	N/A	6.908	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/06/20 - 04:04
Limit: FCC_Part15.407_RE(3m)	Engineer: Buter Shi
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIFI+BT Combo Module	Power: By USB
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5795MHz	

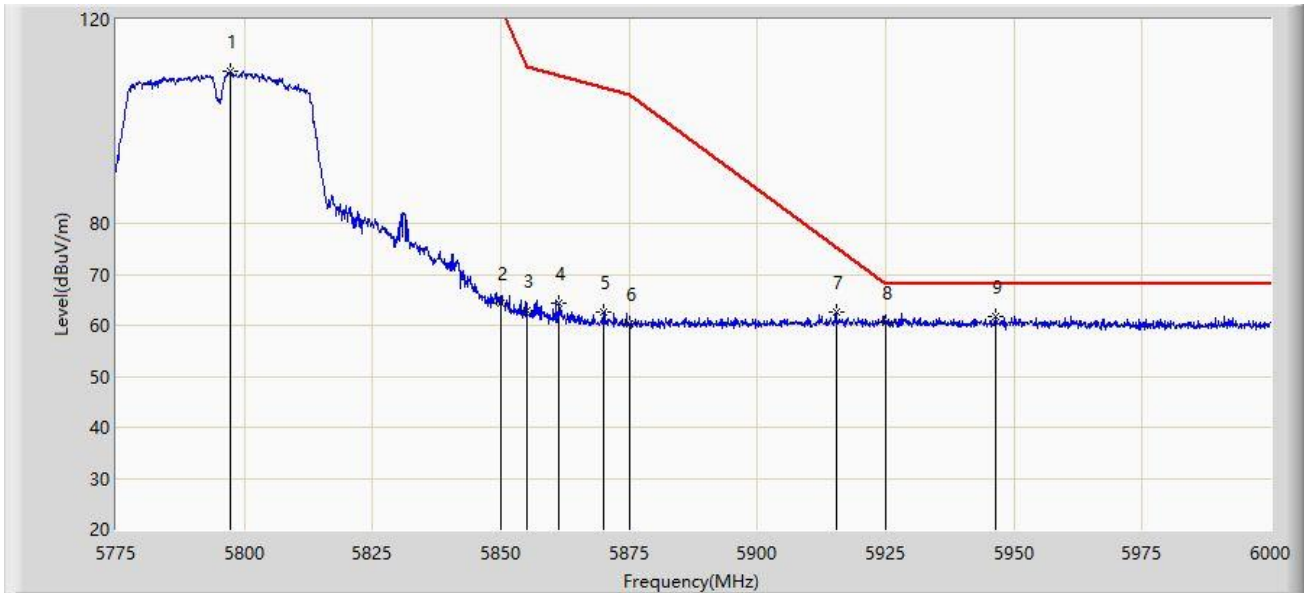


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5797.275	109.711	102.975	N/A	N/A	6.735	PK
2			5850.000	64.308	57.500	-57.892	122.200	6.808	PK
3			5855.000	62.919	56.099	-47.881	110.800	6.820	PK
4			5861.175	64.338	57.504	-44.731	109.069	6.834	PK
5			5869.950	62.741	55.835	-43.871	106.612	6.907	PK
6			5875.000	60.156	53.238	-45.044	105.200	6.918	PK
7			5915.288	62.480	55.381	-12.882	75.362	7.099	PK
8			5925.000	60.715	53.618	-7.485	68.200	7.097	PK
9		*	5946.337	61.842	54.734	-6.358	68.200	7.109	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/06/20 - 04:07
Limit: FCC_Part15.407_RE(3m)	Engineer: Buter Shi
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIFI+BT Combo Module	Power: By USB
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5795MHz	

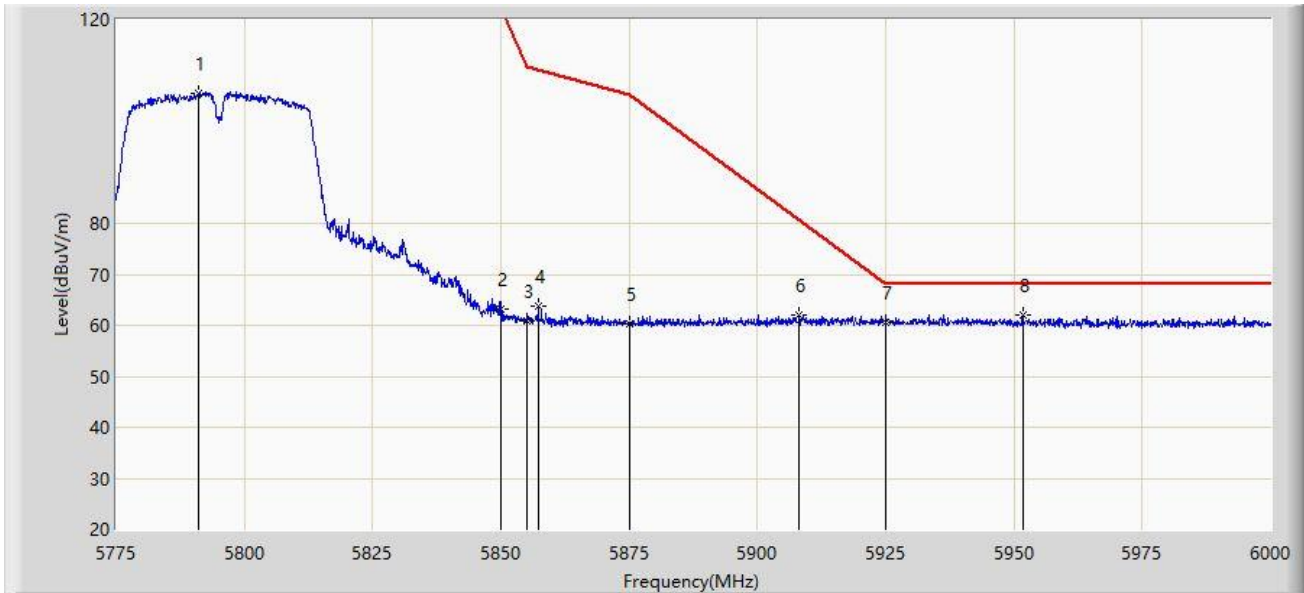


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5791.087	105.608	98.894	N/A	N/A	6.714	PK
2			5850.000	63.088	56.280	-59.112	122.200	6.808	PK
3			5855.000	61.006	54.186	-49.794	110.800	6.820	PK
4			5857.350	63.698	56.873	-46.443	110.141	6.825	PK
5			5875.000	60.304	53.386	-44.896	105.200	6.918	PK
6			5908.087	62.057	54.961	-18.624	80.681	7.096	PK
7			5925.000	60.571	53.474	-7.629	68.200	7.097	PK
8		*	5951.737	62.056	54.996	-6.144	68.200	7.060	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/06/20 - 10:47
Limit: FCC_Part15.209_RE(3m)	Engineer: Buter Shi
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIFI+BT Combo Module	Power: By USB
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz	

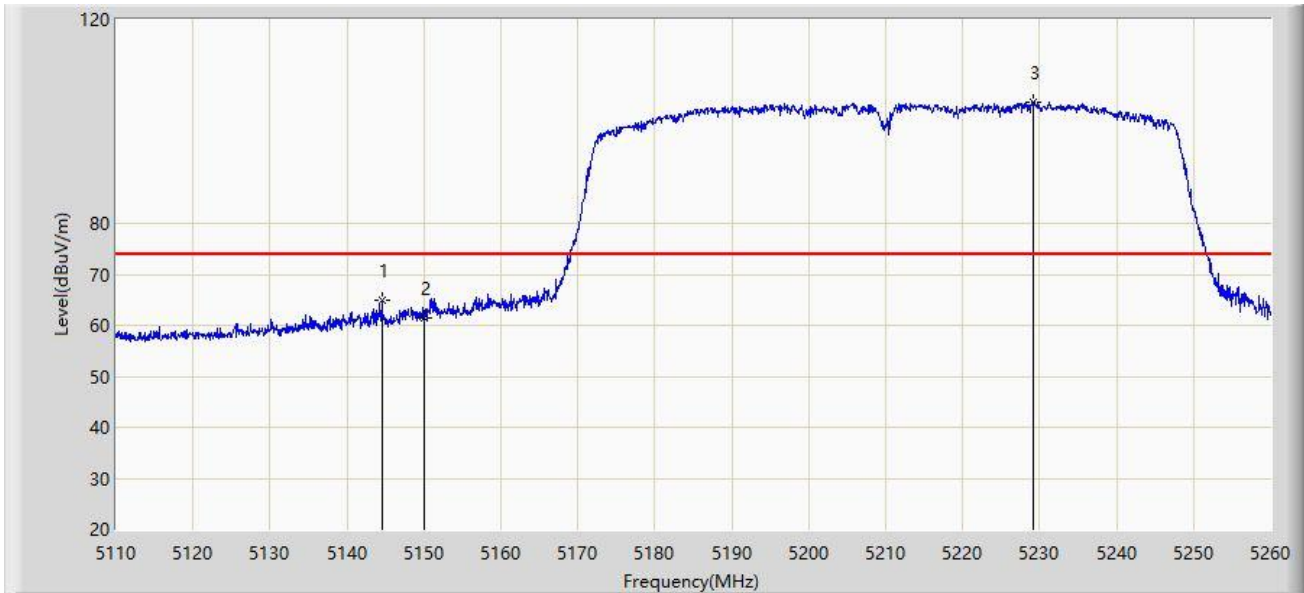


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5144.500	64.814	58.299	-9.186	74.000	6.516	PK
2			5150.000	61.520	55.068	-12.480	74.000	6.452	PK
3		*	5229.250	103.851	97.740	N/A	N/A	6.111	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/06/20 - 10:54
Limit: FCC_Part15.209_RE(3m)	Engineer: Buter Shi
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIFI+BT Combo Module	Power: By USB
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz	

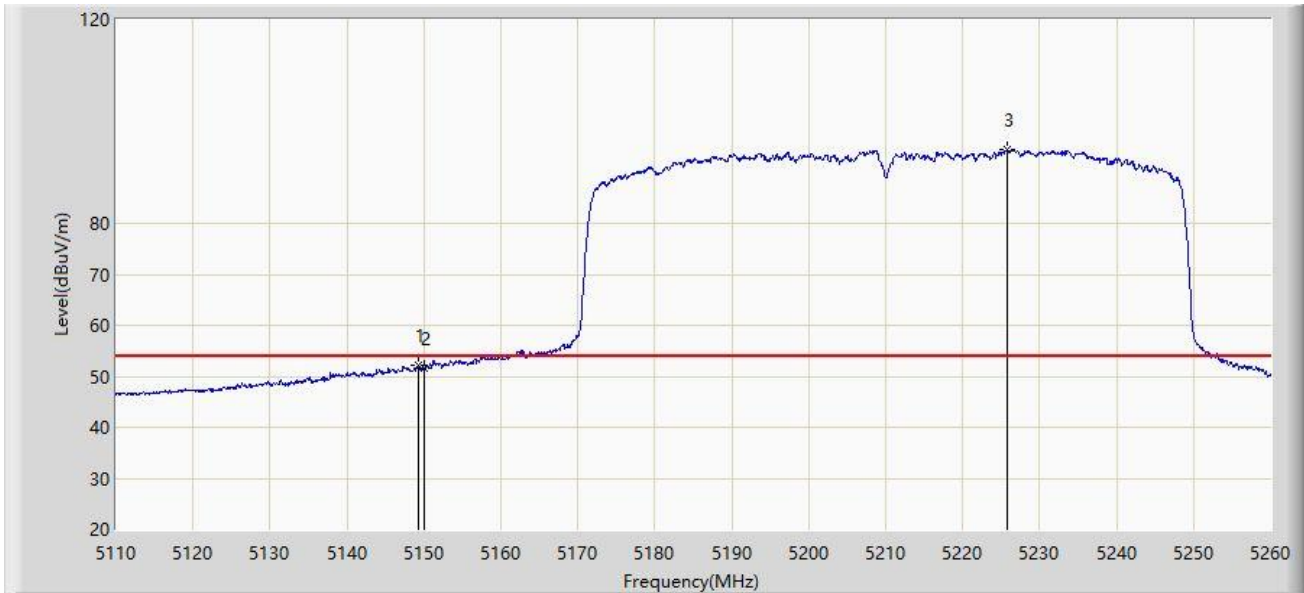


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5149.225	52.192	45.739	-1.808	54.000	6.453	AV
2			5150.000	51.513	45.061	-2.487	54.000	6.452	AV
3		*	5225.725	94.439	88.335	N/A	N/A	6.103	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/06/20 - 11:20
Limit: FCC_Part15.209_RE(3m)	Engineer: Buter Shi
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIFI+BT Combo Module	Power: By USB
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz	

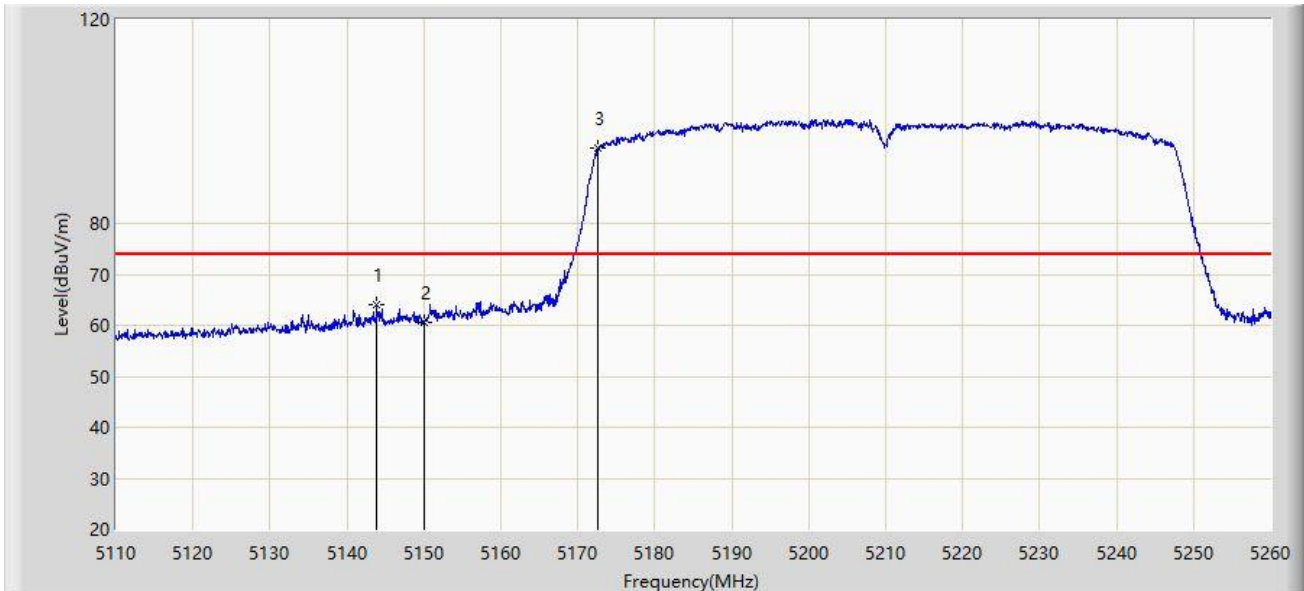


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5143.825	63.953	57.426	-10.047	74.000	6.527	PK
2			5150.000	60.627	54.175	-13.373	74.000	6.452	PK
3		*	5172.625	94.858	88.393	N/A	N/A	6.466	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/06/20 - 11:23
Limit: FCC_Part15.209_RE(3m)	Engineer: Buter Shi
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIFI+BT Combo Module	Power: By USB
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz	

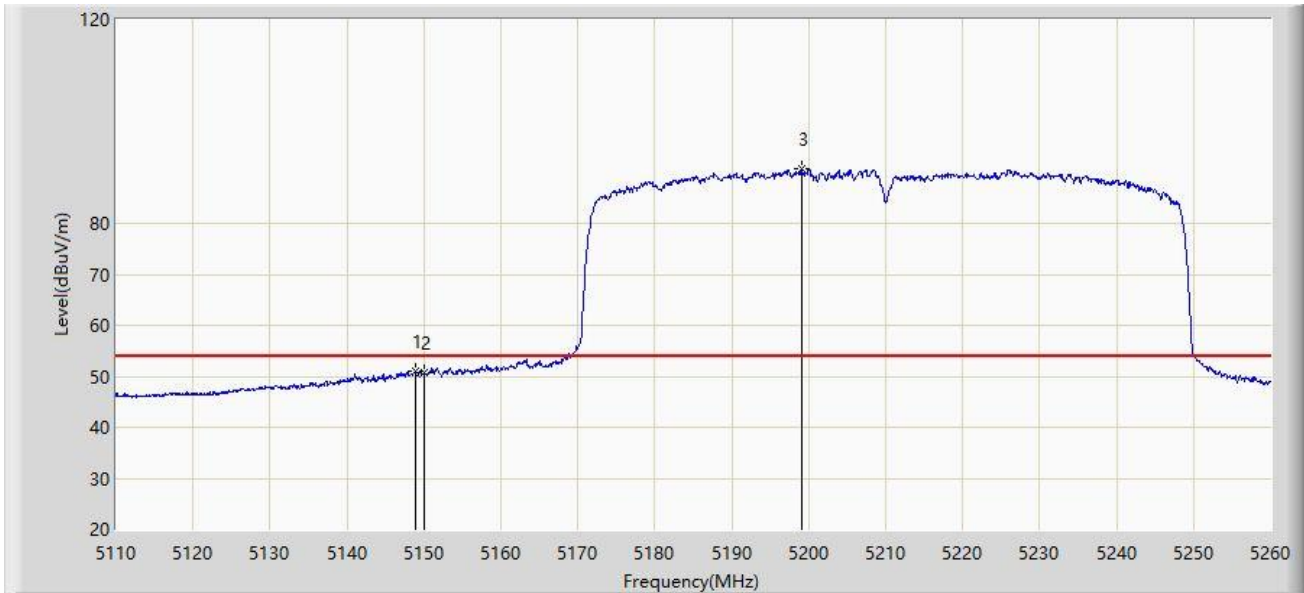


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5148.925	50.992	44.539	-3.008	54.000	6.453	AV
2			5150.000	50.668	44.216	-3.332	54.000	6.452	AV
3		*	5199.100	90.772	84.436	N/A	N/A	6.336	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/06/20 - 11:27
Limit: FCC_Part15.209_RE(3m)	Engineer: Buter Shi
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIFI+BT Combo Module	Power: By USB
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5290MHz	

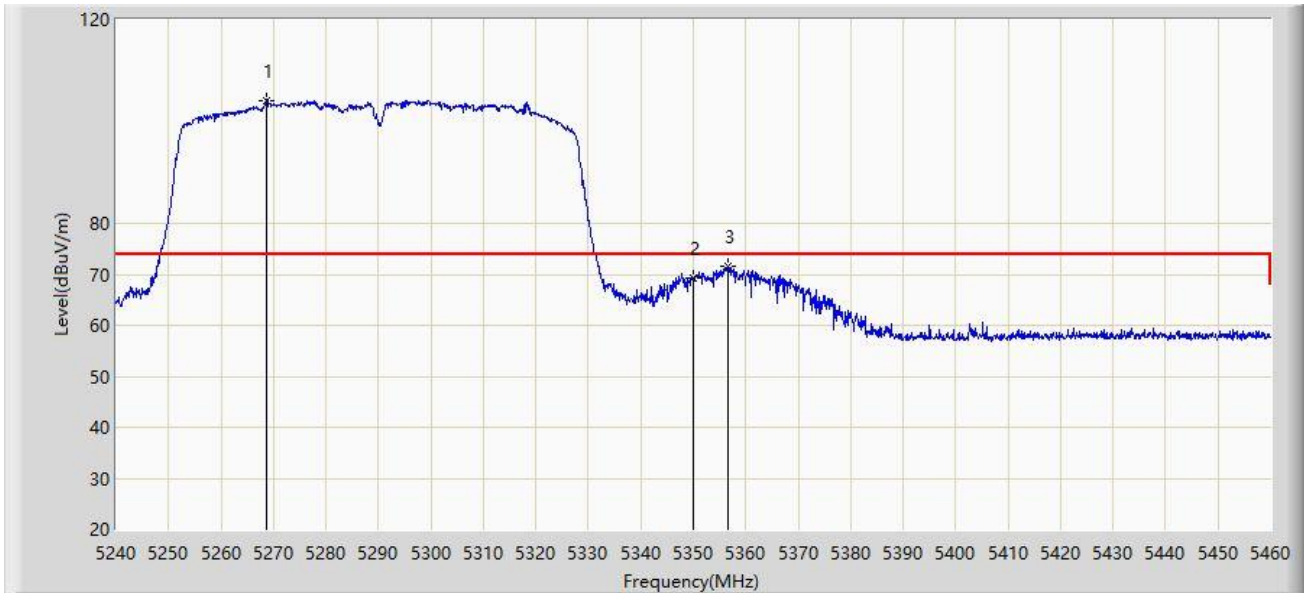


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5268.600	104.164	98.128	N/A	N/A	6.037	PK
2			5350.000	69.160	62.702	-4.840	74.000	6.458	PK
3			5356.710	71.602	65.329	-2.398	74.000	6.273	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/06/20 - 11:31
Limit: FCC_Part15.209_RE(3m)	Engineer: Buter Shi
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIFI+BT Combo Module	Power: By USB
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5290MHz	

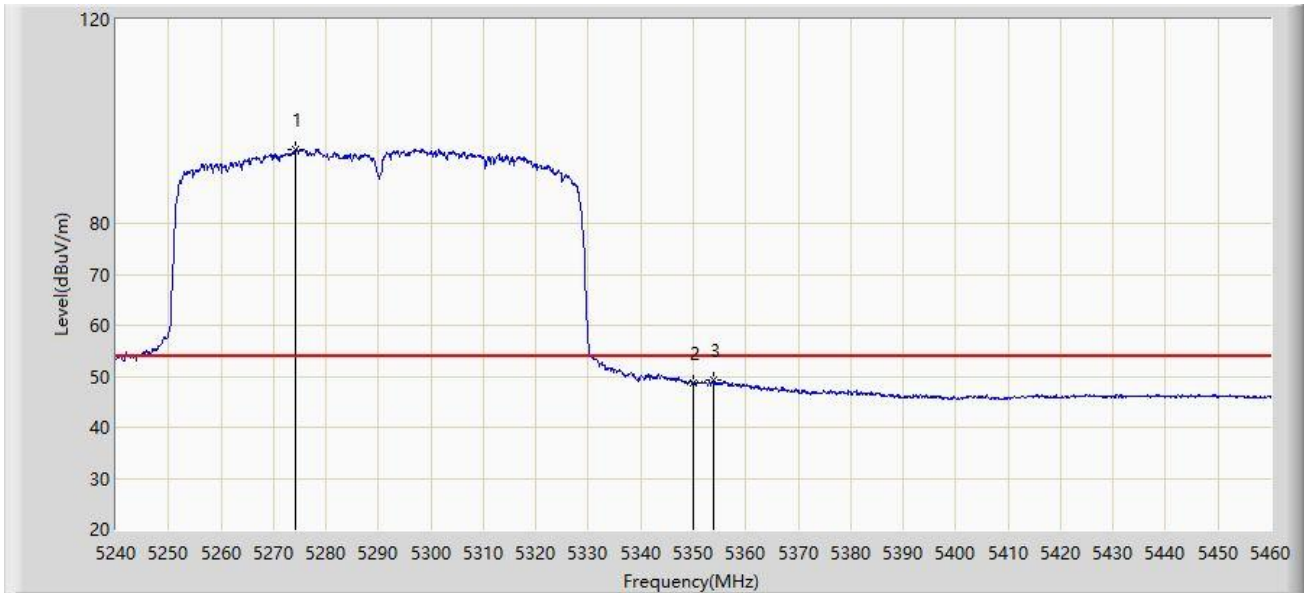


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5274.320	94.431	88.537	N/A	N/A	5.894	AV
2			5350.000	48.746	42.288	-5.254	54.000	6.458	AV
3			5353.740	49.250	42.900	-4.750	54.000	6.350	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/06/20 - 11:34
Limit: FCC_Part15.209_RE(3m)	Engineer: Buter Shi
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIFI+BT Combo Module	Power: By USB
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5290MHz	

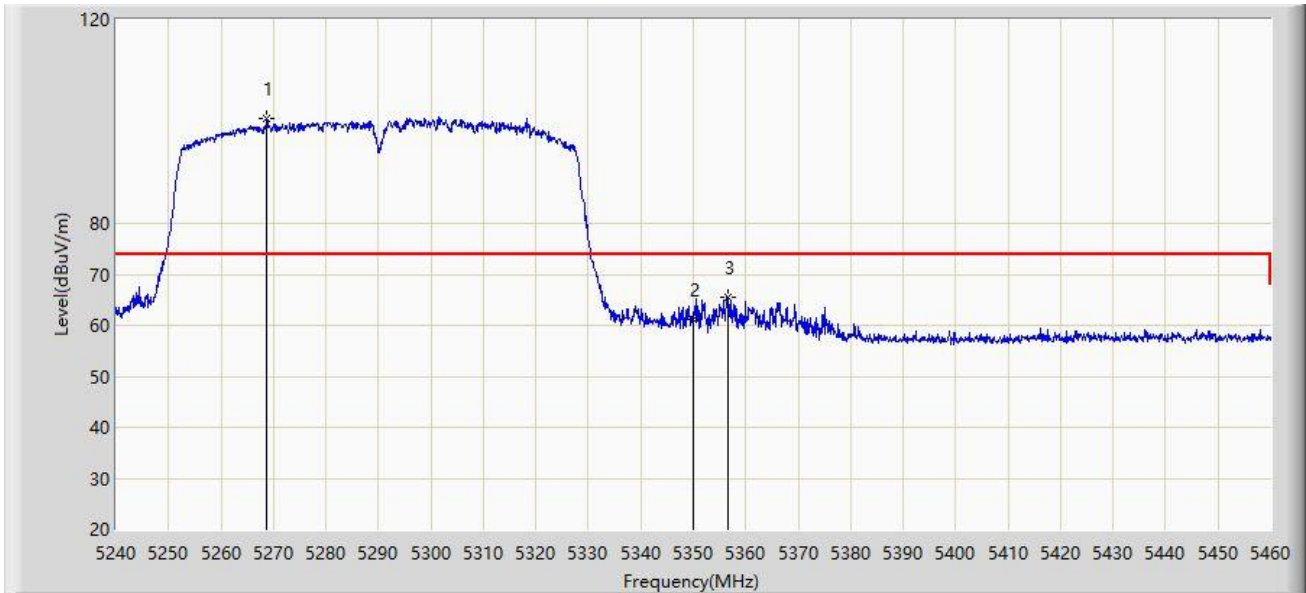


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5268.710	100.626	94.593	N/A	N/A	6.033	PK
2			5350.000	61.279	54.821	-12.721	74.000	6.458	PK
3			5356.600	65.620	59.344	-8.380	74.000	6.276	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/06/20 - 11:35
Limit: FCC_Part15.209_RE(3m)	Engineer: Buter Shi
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIFI+BT Combo Module	Power: By USB
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5290MHz	

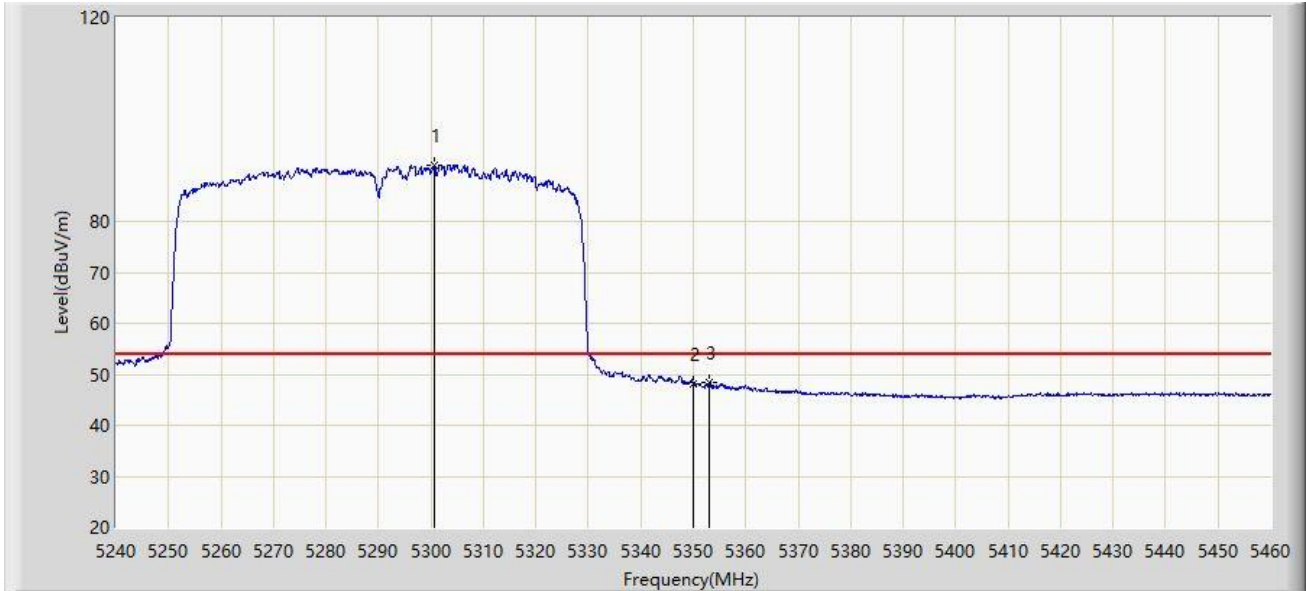


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5300.610	90.971	85.010	N/A	N/A	5.960	AV
2			5350.000	48.224	41.766	-5.776	54.000	6.458	AV
3			5353.080	48.489	42.122	-5.511	54.000	6.367	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/06/20 - 11:51
Limit: FCC_Part15.209_RE(3m)	Engineer: Buter Shi
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIFI+BT Combo Module	Power: By USB
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5530MHz	

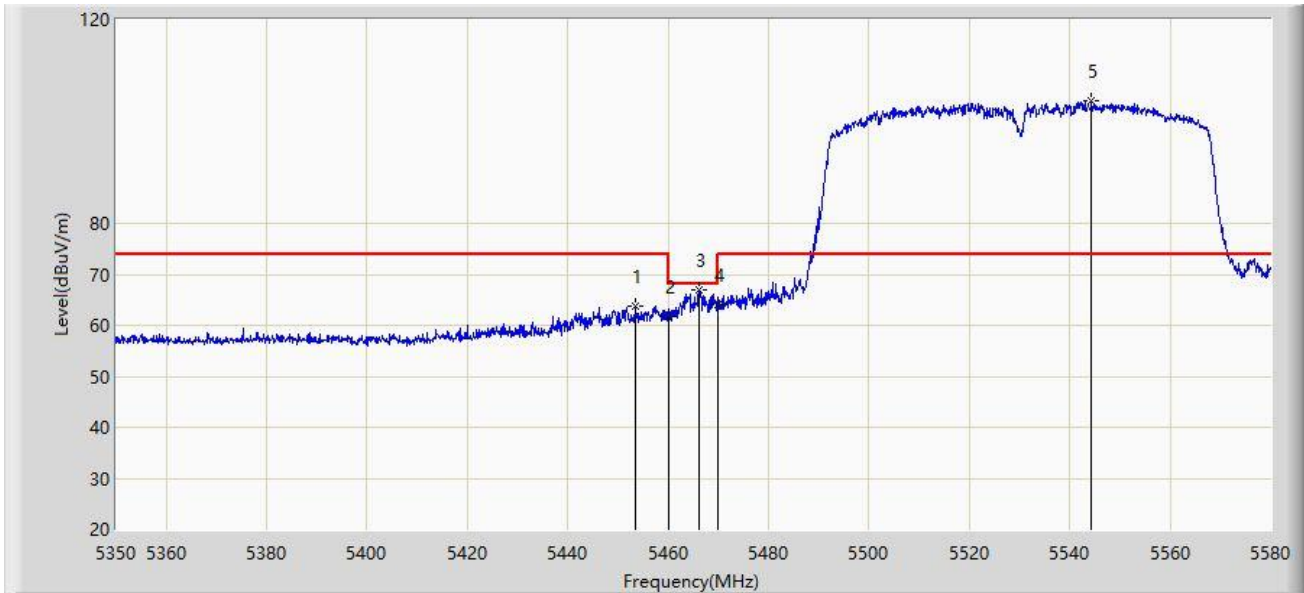


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5453.385	63.704	57.239	-10.296	74.000	6.465	PK
2			5460.000	61.778	55.292	-12.222	74.000	6.486	PK
3			5466.265	67.004	60.494	-1.196	68.200	6.510	PK
4			5470.000	64.074	57.549	-4.126	68.200	6.524	PK
5		*	5544.350	104.046	97.175	N/A	N/A	6.871	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/06/20 - 11:53
Limit: FCC_Part15.209_RE(3m)	Engineer: Buter Shi
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIFI+BT Combo Module	Power: By USB
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5530MHz	

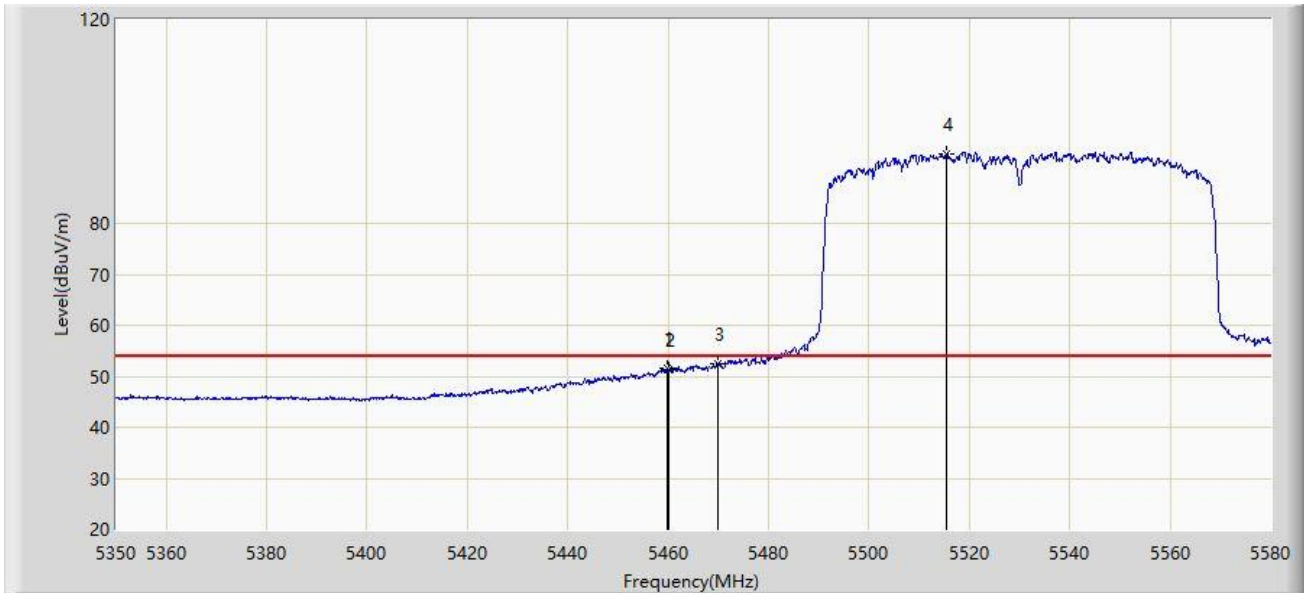


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5459.940	51.480	44.995	-2.520	54.000	6.485	AV
2			5460.000	51.371	44.885	-2.629	54.000	6.486	AV
3			5470.000	52.416	45.891	-1.584	54.000	6.524	AV
4		*	5515.485	93.764	87.347	N/A	N/A	6.416	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/06/20 - 11:55
Limit: FCC_Part15.209_RE(3m)	Engineer: Buter Shi
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIFI+BT Combo Module	Power: By USB
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5530MHz	

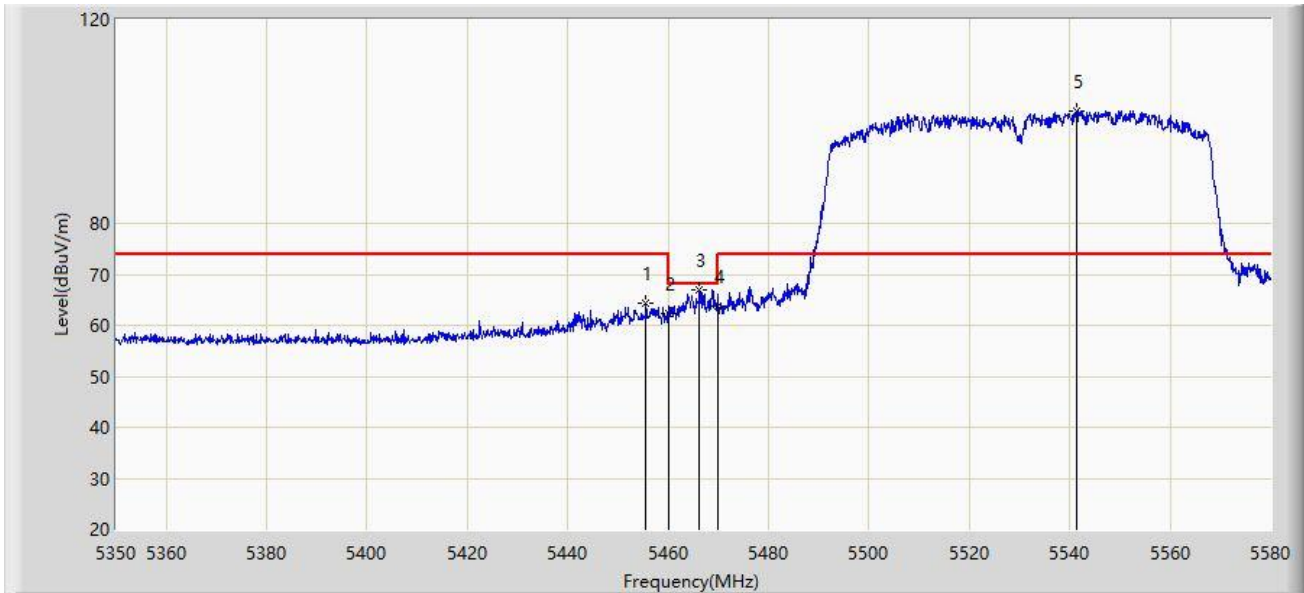


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5455.570	64.382	57.914	-9.618	74.000	6.468	PK
2			5460.000	62.342	55.856	-11.658	74.000	6.486	PK
3			5466.265	66.828	60.318	-1.372	68.200	6.510	PK
4			5470.000	63.636	57.111	-4.564	68.200	6.524	PK
5		*	5541.245	101.907	95.094	N/A	N/A	6.813	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/06/20 - 11:57
Limit: FCC_Part15.209_RE(3m)	Engineer: Buter Shi
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIFI+BT Combo Module	Power: By USB
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5530MHz	

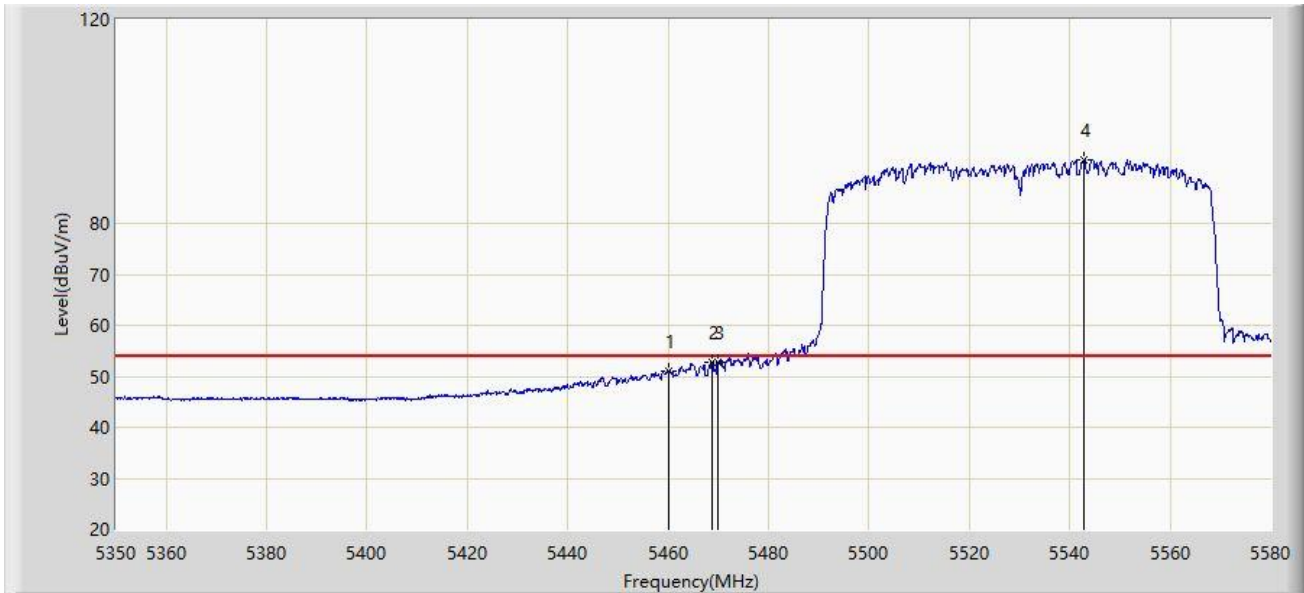


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	51.012	44.526	-2.988	54.000	6.486	AV
2			5468.795	52.857	46.337	-1.143	54.000	6.519	AV
3			5470.000	52.696	46.171	-1.304	54.000	6.524	AV
4		*	5542.855	92.547	85.678	N/A	N/A	6.869	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/06/20 - 12:02
Limit: FCC_Part15.407_RE(3m)	Engineer: Buter Shi
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIFI+BT Combo Module	Power: By USB
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5775MHz	

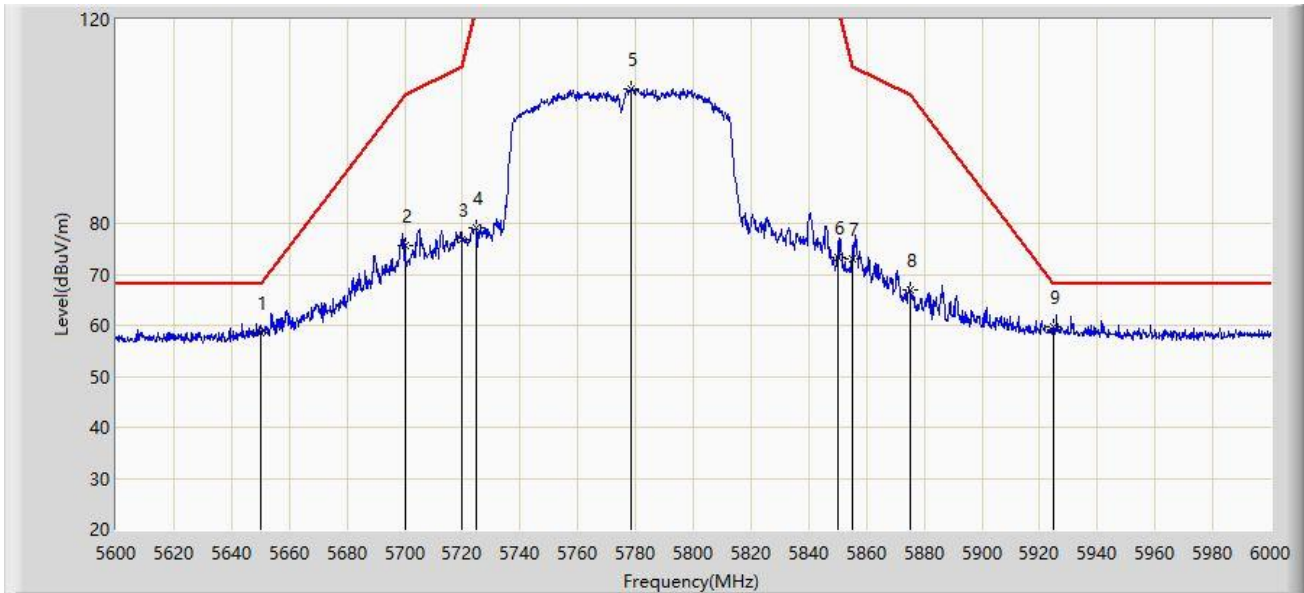


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5650.000	58.523	52.264	-9.677	68.200	6.258	PK
2			5700.000	75.662	69.237	-29.538	105.200	6.426	PK
3			5720.000	76.820	70.435	-33.980	110.800	6.386	PK
4			5725.000	79.086	72.662	-43.114	122.200	6.424	PK
5			5778.600	106.279	99.240	N/A	N/A	7.039	PK
6			5850.000	73.201	66.393	-48.999	122.200	6.808	PK
7			5855.000	72.964	66.144	-37.836	110.800	6.820	PK
8			5875.000	67.053	60.135	-38.147	105.200	6.918	PK
9		*	5925.000	59.679	52.582	-8.521	68.200	7.097	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/06/20 - 12:22
Limit: FCC_Part15.407_RE(3m)	Engineer: Buter Shi
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIFI+BT Combo Module	Power: By USB
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5775MHz	

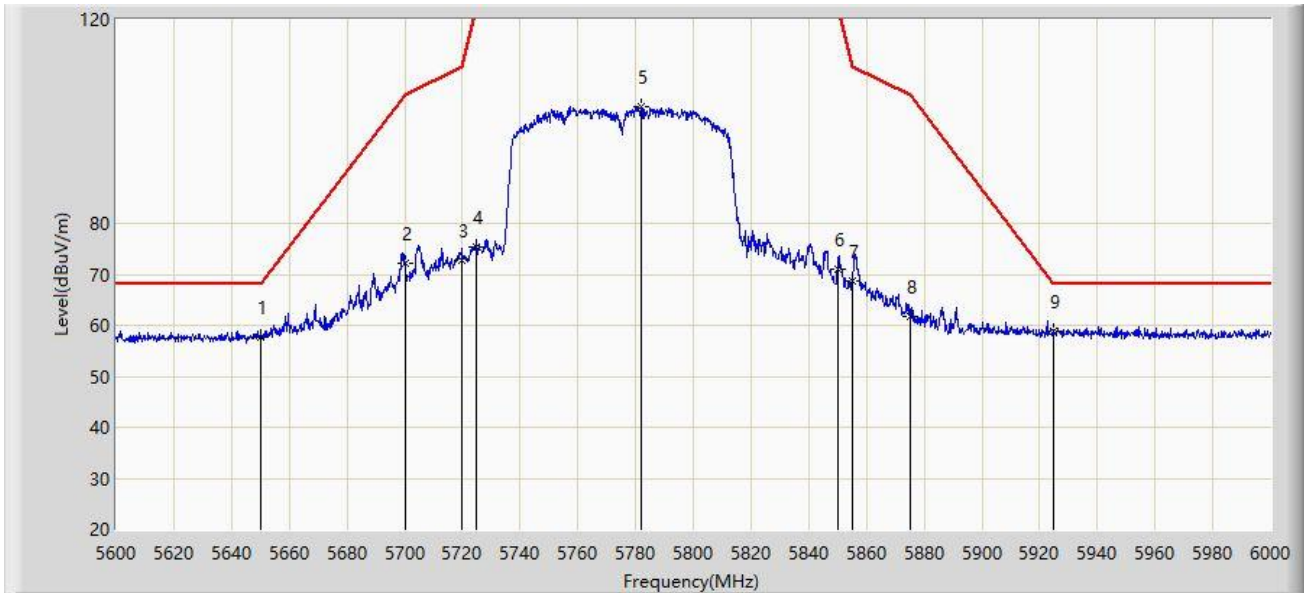

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5650.000	57.619	51.360	-10.581	68.200	6.258	PK
2			5700.000	72.223	65.798	-32.977	105.200	6.426	PK
3			5720.000	72.808	66.423	-37.992	110.800	6.386	PK
4			5725.000	75.382	68.958	-46.818	122.200	6.424	PK
5			5782.000	102.867	95.831	N/A	N/A	7.036	PK
6			5850.000	70.911	64.103	-51.289	122.200	6.808	PK
7			5855.000	68.637	61.817	-42.163	110.800	6.820	PK
8			5875.000	61.687	54.769	-43.513	105.200	6.918	PK
9		*	5925.000	58.766	51.669	-9.434	68.200	7.097	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

6.10. AC Conducted Emissions Measurement


6.10.1. Test Limit

RSS-GEN Limits		
Frequency (MHz)	QP (dB μ V)	AV (dB μ V)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

6.10.2. Test Setup

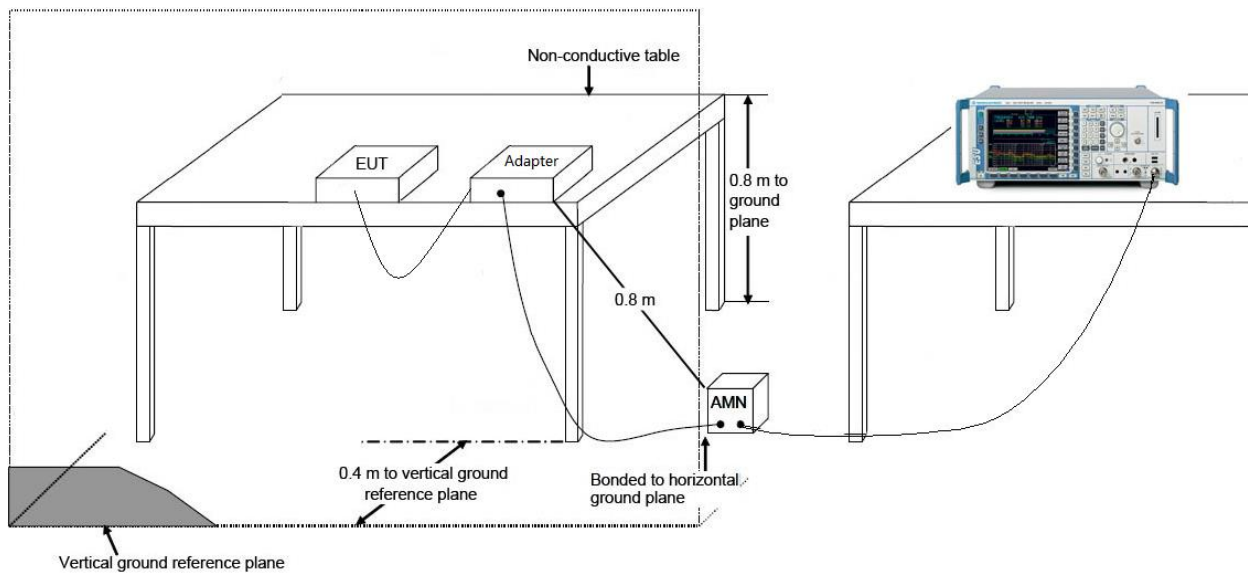

6.10.3. Test Result

Site: SR2	Time: 2020/08/19 - 16:53
Limit: FCC_Part15.207_CE_AC Power	Engineer: Dillon Diao
Probe: ENV216_101683_Filter On	Polarity: Line
EUT: WIFI+BT Combo Module	Power: AC 120V/60Hz
Test Mode 1	

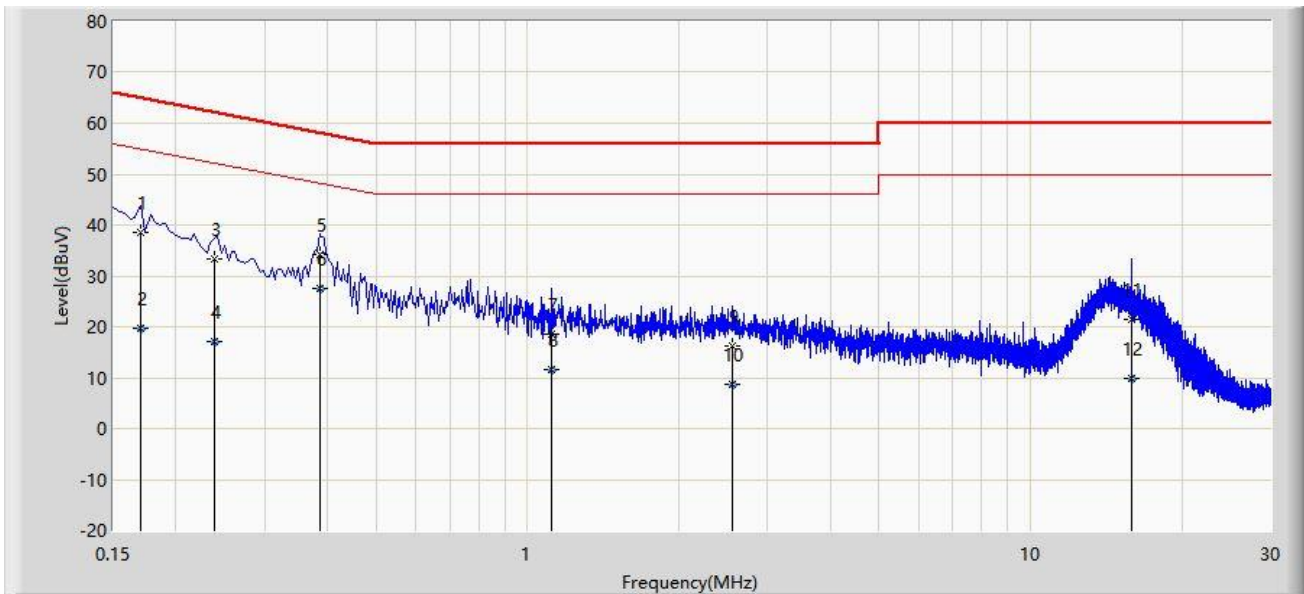


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV)	Factor (dB)	Type
1			0.170	38.519	28.895	-26.441	64.960	9.623	QP
2			0.170	19.704	10.080	-35.257	54.960	9.623	AV
3			0.238	33.210	23.563	-28.956	62.166	9.647	QP
4			0.238	17.053	7.406	-35.113	52.166	9.647	AV
5			0.386	34.092	24.416	-24.058	58.149	9.676	QP
6		*	0.386	27.656	17.980	-20.493	48.149	9.676	AV
7			1.118	18.447	8.695	-37.553	56.000	9.752	QP
8			1.118	11.603	1.851	-34.397	46.000	9.752	AV
9			2.562	16.196	6.415	-39.804	56.000	9.780	QP
10			2.562	8.731	-1.049	-37.269	46.000	9.780	AV
11			15.874	21.329	11.108	-38.671	60.000	10.221	QP
12			15.874	9.950	-0.271	-40.050	50.000	10.221	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

Site: SR2	Time: 2020/08/19 - 16:49
Limit: FCC_Part15.207_CE_AC Power	Engineer: Dillon Diao
Probe: ENV216_101683_Filter On	Polarity: Neutral
EUT: WIFI+BT Combo Module	Power: AC 120V/60Hz
Test Mode 1	

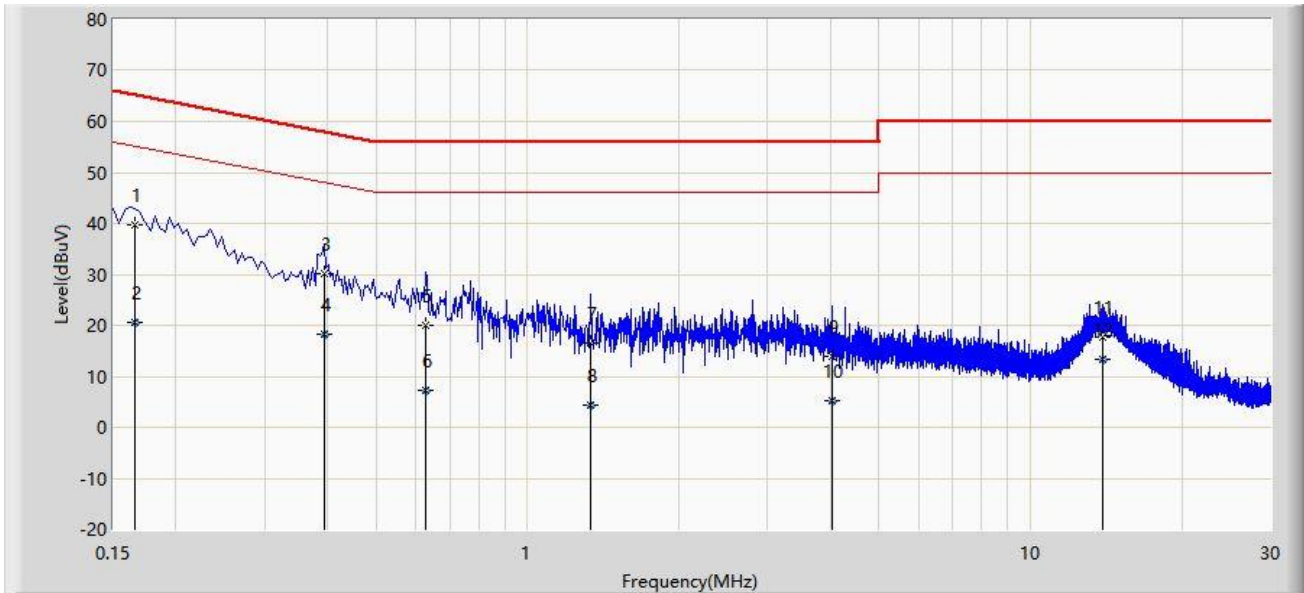

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV)	Factor (dB)	Type
1		*	0.166	39.641	30.030	-25.517	65.158	9.611	QP
2			0.166	20.465	10.854	-34.693	55.158	9.611	AV
3			0.394	30.268	20.601	-27.711	57.979	9.668	QP
4			0.394	18.380	8.713	-29.599	47.979	9.668	AV
5			0.626	19.924	10.220	-36.076	56.000	9.704	QP
6			0.626	7.333	-2.371	-38.667	46.000	9.704	AV
7			1.338	16.508	6.760	-39.492	56.000	9.747	QP
8			1.338	4.353	-5.395	-41.647	46.000	9.747	AV
9			4.030	14.048	4.224	-41.952	56.000	9.824	QP
10			4.030	5.353	-4.471	-40.647	46.000	9.824	AV
11			13.938	17.711	7.550	-42.289	60.000	10.161	QP
12			13.938	13.448	3.287	-36.552	50.000	10.161	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

7. CONCLUSION

The data collected relate only the item(s) tested and show that the device is in compliance with Part 15E of the FCC rules and ISED rules.

————— The End —————

Appendix A - Test Setup Photograph

Refer to "2006RSU028-UT" file.

Appendix B-EUT Photograph

Refer to “2006RSU028-UE” file.