



7.9.4. Test Setup


9kHz ~ 30MHz Test Setup:

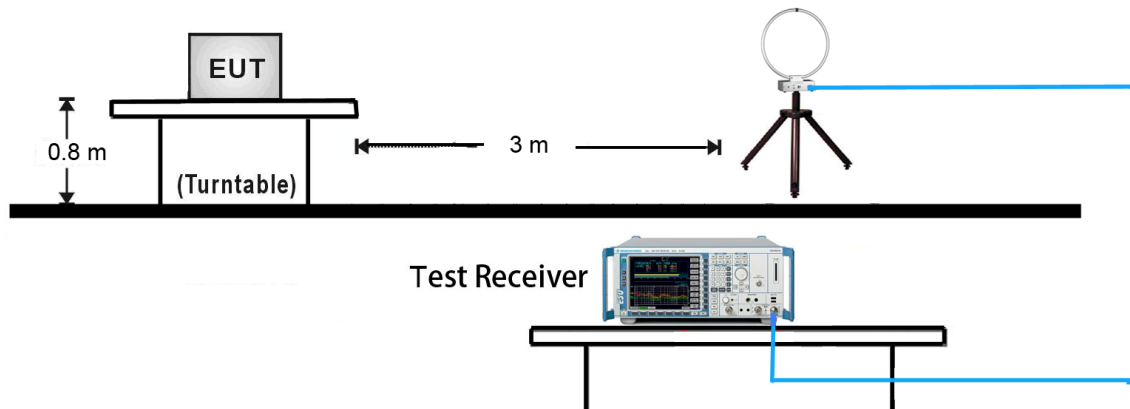


30MHz ~ 1GHz Test Setup:

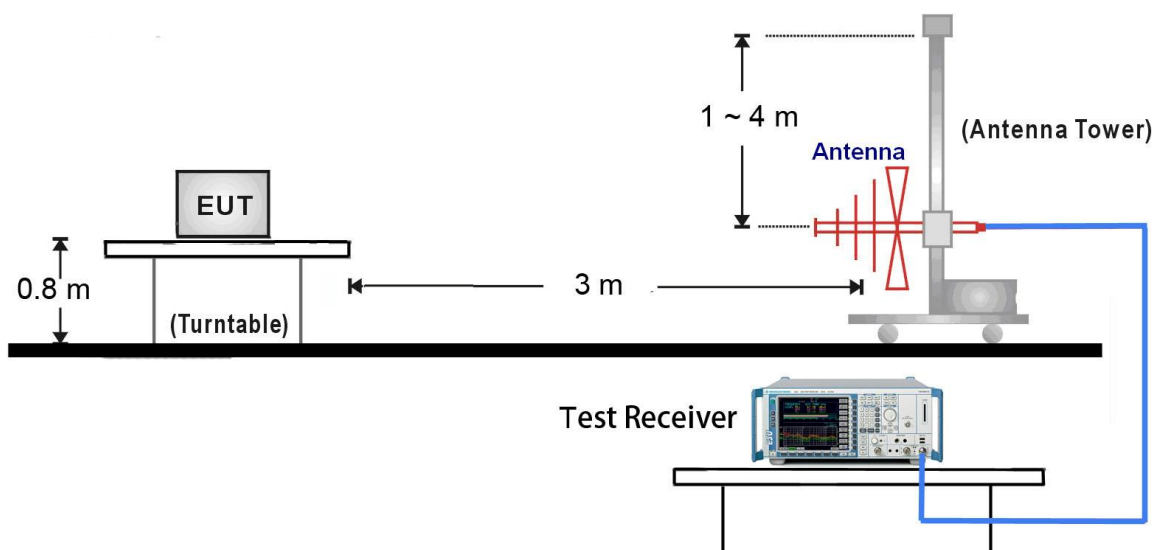

1GHz ~ 18GHz Test Setup:

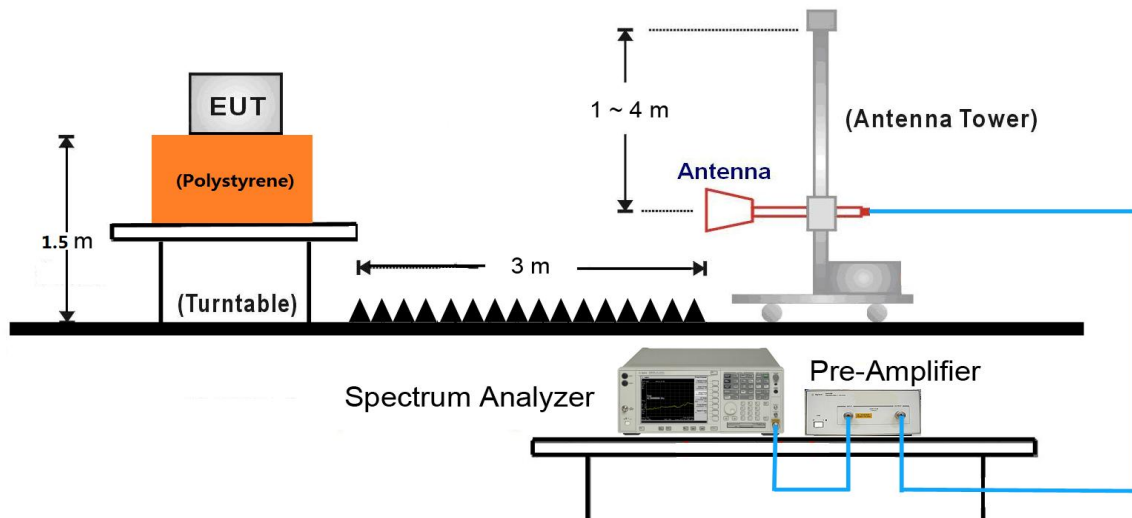

18GHz ~ 25GHz Test Setup:

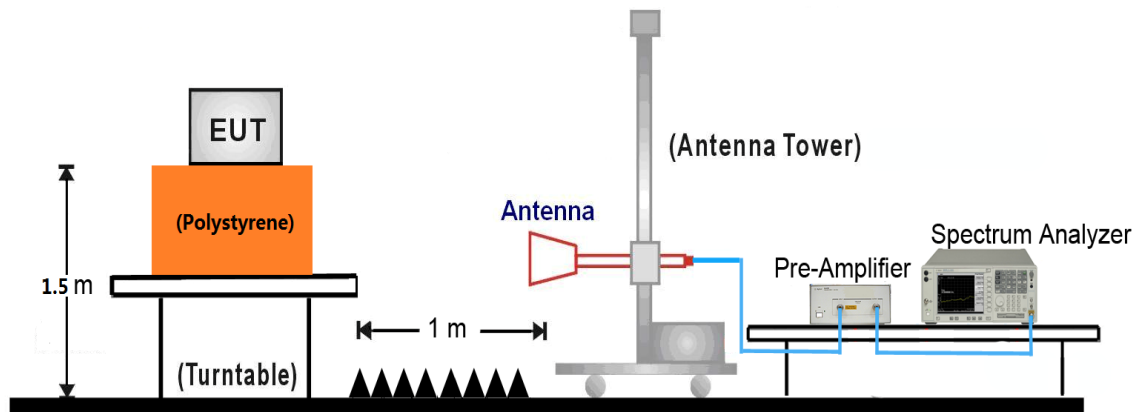

7.9.5. Test Result

Test Mode:	DH5	Test Site:	AC1
Test Channel:	00	Test Engineer:	Roy Cheng
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4804.1	53.0	2.7	55.7	74	-18.3	Peak	Horizontal
	4804.1	45.2	2.7	47.9	54	-6.1	Average	Horizontal
*	6825.9	34.9	6.2	41.1	74	-32.9	Peak	Horizontal
	9174.7	34.2	9.9	44.1	74	-29.9	Peak	Horizontal
*	12748.4	33.6	11.7	45.3	74	-28.7	Peak	Horizontal
	4808.0	50.7	2.7	53.4	74	-20.6	Peak	Vertical
*	6598.4	35.3	6.0	41.3	74	-32.7	Peak	Vertical
	9175.7	35.0	10.0	45.0	74	-29.0	Peak	Vertical
*	12764.3	32.8	11.7	44.5	74	-29.5	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is 20dBc of the fundamental emission level (83.2dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Mode:	DH5	Test Site:	AC1
Test Channel:	39	Test Engineer:	Roy Cheng
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4884.5	51.0	2.7	53.7	74	-20.3	Peak	Horizontal
*	6853.7	34.4	6.3	40.7	74	-33.3	Peak	Horizontal
	9147.6	33.5	9.8	43.3	74	-30.7	Peak	Horizontal
*	12748.4	33.2	11.7	44.9	74	-29.1	Peak	Horizontal
	4884.5	49.2	2.7	51.9	74	-22.1	Peak	Vertical
*	6825.4	34.5	6.2	40.7	74	-33.3	Peak	Vertical
	9472.4	34.1	10.6	44.7	74	-29.3	Peak	Vertical
*	12748.3	33.3	11.7	45.0	74	-29.0	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (84.8dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Mode:	DH5	Test Site:	AC1
Test Channel:	78	Test Engineer:	Roy Cheng
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4961.0	40.6	2.9	43.5	74	-30.5	Peak	Horizontal
*	6826.4	34.6	6.2	40.8	74	-33.2	Peak	Horizontal
	9147.3	33.8	9.8	43.6	74	-30.4	Peak	Horizontal
*	12748.3	33.3	11.7	45.0	74	-29.0	Peak	Horizontal
	4961.0	38.9	2.9	41.8	74	-32.2	Peak	Vertical
*	6174.3	34.6	4.6	39.2	74	-34.8	Peak	Vertical
	8356.1	34.7	8.0	42.7	74	-31.3	Peak	Vertical
*	12925.3	32.8	12.1	44.9	74	-29.1	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (89.5dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Mode:	2DH5	Test Site:	AC1
Test Channel:	00	Test Engineer:	Roy Cheng
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4808.0	46.7	2.7	49.4	74	-24.6	Peak	Horizontal
*	6853.2	34.3	6.3	40.6	74	-33.4	Peak	Horizontal
	8425.4	34.6	8.2	42.8	74	-31.2	Peak	Horizontal
*	12892.2	32.9	12.0	44.9	74	-29.1	Peak	Horizontal
	4799.5	46.8	2.7	49.5	74	-24.5	Peak	Vertical
*	6842.3	34.7	6.3	41.0	74	-33.0	Peak	Vertical
	9484.3	33.9	10.6	44.5	74	-29.5	Peak	Vertical
*	12842.4	32.2	11.9	44.1	74	-29.9	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (81.2dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Mode:	2DH5	Test Site:	AC1
Test Channel:	39	Test Engineer:	Roy Cheng
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4884.5	47.2	2.7	49.9	74	-24.1	Peak	Horizontal
*	6359.9	34.6	5.2	39.8	74	-34.2	Peak	Horizontal
	9142.7	34.2	9.8	44.0	74	-30.0	Peak	Horizontal
*	12958.2	33.2	12.1	45.3	74	-28.7	Peak	Horizontal
	4884.5	46.2	2.7	48.9	74	-25.1	Peak	Vertical
*	6825.4	35.4	6.2	41.6	74	-32.4	Peak	Vertical
	9417.3	34.5	10.6	45.1	74	-28.9	Peak	Vertical
*	12968.4	32.9	12.2	45.1	74	-28.9	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is 20dBc of the fundamental emission level (85.7dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Mode:	2DH5	Test Site:	AC1
Test Channel:	78	Test Engineer:	Roy Cheng
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4961.0	44.5	2.9	47.4	74	-26.6	Peak	Horizontal
*	6951.2	34.2	6.7	40.9	74	-33.1	Peak	Horizontal
	9175.3	34.3	10.0	44.3	74	-29.7	Peak	Horizontal
*	12985.4	32.9	12.1	45.0	74	-29.0	Peak	Horizontal
	4961.0	43.7	2.9	46.6	74	-27.4	Peak	Vertical
*	6952.4	34.9	6.7	41.6	74	-32.4	Peak	Vertical
	9415.3	34.7	10.6	45.3	74	-28.7	Peak	Vertical
*	12958.4	32.8	12.1	44.9	74	-29.1	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is 20dBc of the fundamental emission level (88.6dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Mode:	3DH5	Test Site:	AC1
Test Channel:	00	Test Engineer:	Roy Cheng
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4808.0	48.6	2.7	51.3	74	-22.7	Peak	Horizontal
*	6953.3	35.4	6.7	42.1	74	-31.9	Peak	Horizontal
	9142.6	33.5	9.8	43.3	74	-30.7	Peak	Horizontal
*	12958.4	33.2	12.1	45.3	74	-28.7	Peak	Horizontal
	4808.0	46.6	2.7	49.3	74	-24.7	Peak	Vertical
*	6054.4	35.0	4.1	39.1	74	-34.9	Peak	Vertical
	9145.4	33.4	9.8	43.2	74	-30.8	Peak	Vertical
*	12954.4	32.6	12.1	44.7	74	-29.3	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is 20dBc of the fundamental emission level (81.2dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Mode:	3DH5	Test Site:	AC1
Test Channel:	39	Test Engineer:	Roy Cheng
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4884.5	48.3	2.7	51.0	74	-23.0	Peak	Horizontal
*	6253.4	33.8	4.7	38.5	74	-35.5	Peak	Horizontal
	9142.3	33.5	9.8	43.3	74	-30.7	Peak	Horizontal
*	12895.4	33.5	12.1	45.6	74	-28.4	Peak	Horizontal
	4884.5	45.8	2.7	48.5	74	-25.5	Peak	Vertical
*	6142.4	33.7	4.5	38.2	74	-35.8	Peak	Vertical
	9142.9	34.2	9.8	44.0	74	-30.0	Peak	Vertical
*	12748.3	32.9	11.7	44.6	74	-29.4	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is 20dBc of the fundamental emission level (85.6dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Mode:	3DH5	Test Site:	AC1
Test Channel:	78	Test Engineer:	Roy Cheng
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4961.0	45.5	2.9	48.4	74	-25.6	Peak	Horizontal
*	6752.4	35.1	5.7	40.8	74	-33.2	Peak	Horizontal
	9142.3	33.2	9.8	43.0	74	-31.0	Peak	Horizontal
*	12863.4	33.0	12.0	45.0	74	-29.0	Peak	Horizontal
	4961.0	43.3	2.9	46.2	74	-27.8	Peak	Vertical
*	6142.4	33.7	4.5	38.2	74	-35.8	Peak	Vertical
	9453.3	33.7	10.5	44.2	74	-29.8	Peak	Vertical
*	12564.3	33.4	11.3	44.7	74	-29.3	Peak	Vertical


Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (88.7dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

The worst case of Radiated Emission 9KHz ~ 1GHz and 18GHz ~ 25GHz:

Site: AC1	Time: 2015/11/25 - 21:55
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: VULB9162_0.03-8GHz	Polarity: Horizontal
EUT: Bluetooth Module	Power: DC 3.3V
Worse Case Mode: Transmit by 2DH5 at Channel 2402MHz	

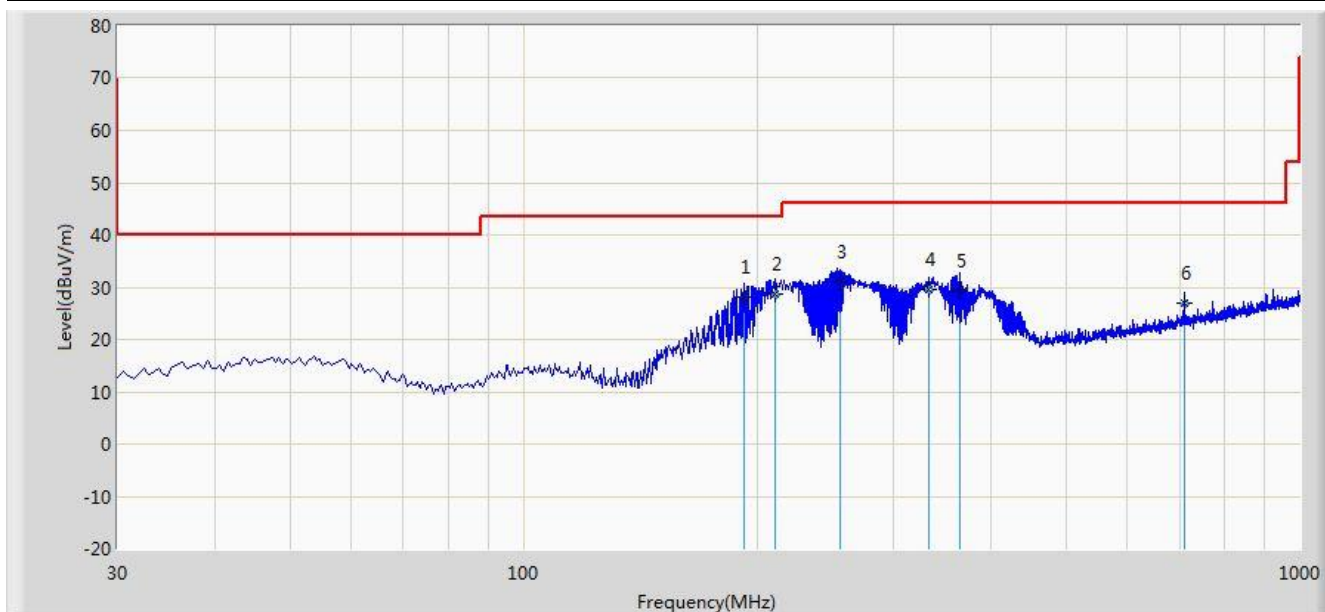


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			192.475	28.150	16.254	-15.350	43.500	11.896	QP
2		*	211.390	28.712	16.280	-14.788	43.500	12.432	QP
3			256.010	30.912	17.125	-15.088	46.000	13.787	QP
4			332.155	29.465	14.025	-16.535	46.000	15.440	QP
5			364.650	29.313	13.254	-16.687	46.000	16.059	QP
6			709.970	27.020	5.265	-18.980	46.000	21.755	QP

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/11/25 - 21:57
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: VULB9162_0.03-8GHz	Polarity: Vertical
EUT: Bluetooth Module	Power: DC 3.3V
Worse Case Mode: Transmit by 2DH5 at Channel 2402MHz	

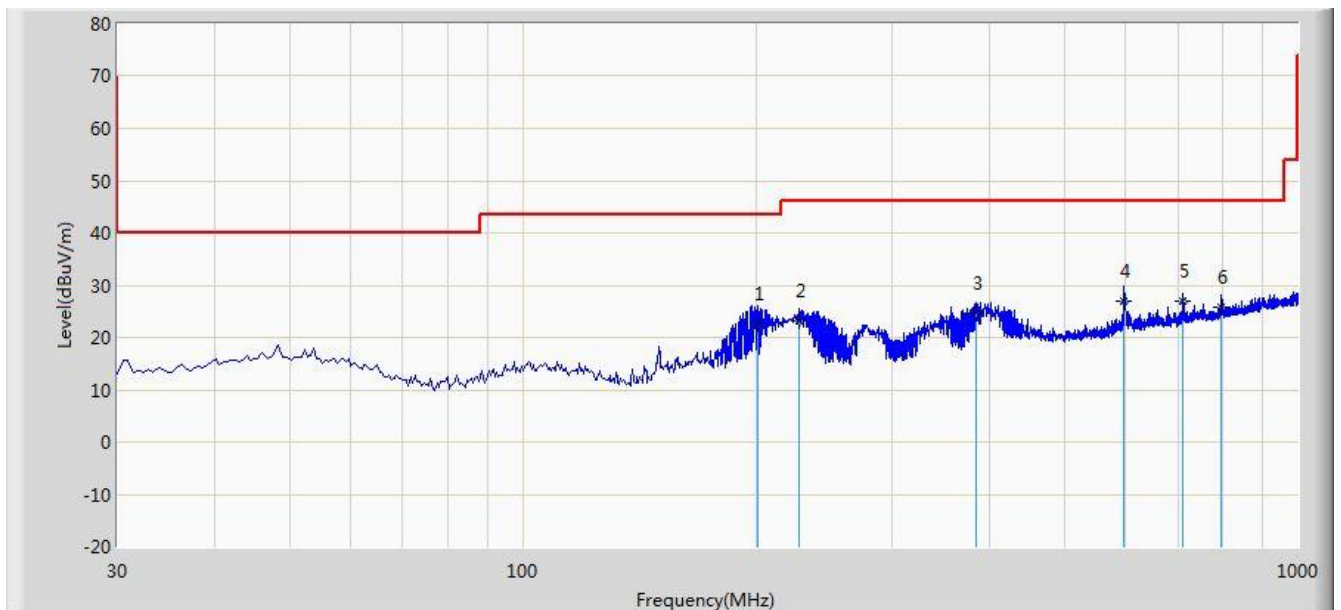


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			201.205	22.502	10.250	-20.998	43.500	12.252	QP
2			226.910	23.179	10.254	-22.821	46.000	12.925	QP
3			385.020	24.662	8.254	-21.338	46.000	16.408	QP
4		*	597.450	27.080	7.025	-18.920	46.000	20.055	QP
5			709.970	27.009	5.254	-18.991	46.000	21.755	QP
6			796.785	25.884	3.050	-20.116	46.000	22.834	QP

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/11/25 - 15:34
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: FMZB1519_0.009-30MHz	Polarity: Face On
EUT: Bluetooth Module	Power: DC 3.3V
Note: There is the ambient noise within frequency range 9kHz~30MHz.	

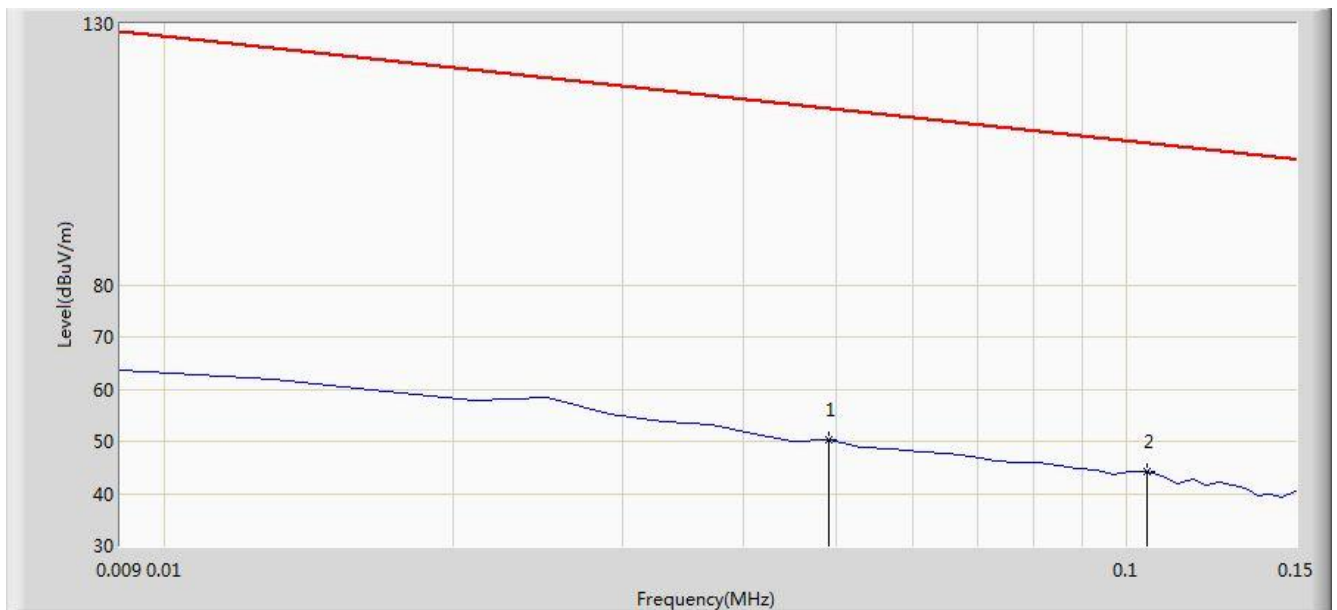


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			0.049	50.367	29.861	-63.422	113.789	20.505	PK
2		*	0.105	44.143	23.996	-63.029	107.173	20.147	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/11/25 - 15:45
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: FMZB1519_0.009-30MHz	Polarity: Face On
EUT: Bluetooth Module	Power: DC 3.3V
Note: There is the ambient noise within frequency range 9kHz~30MHz.	

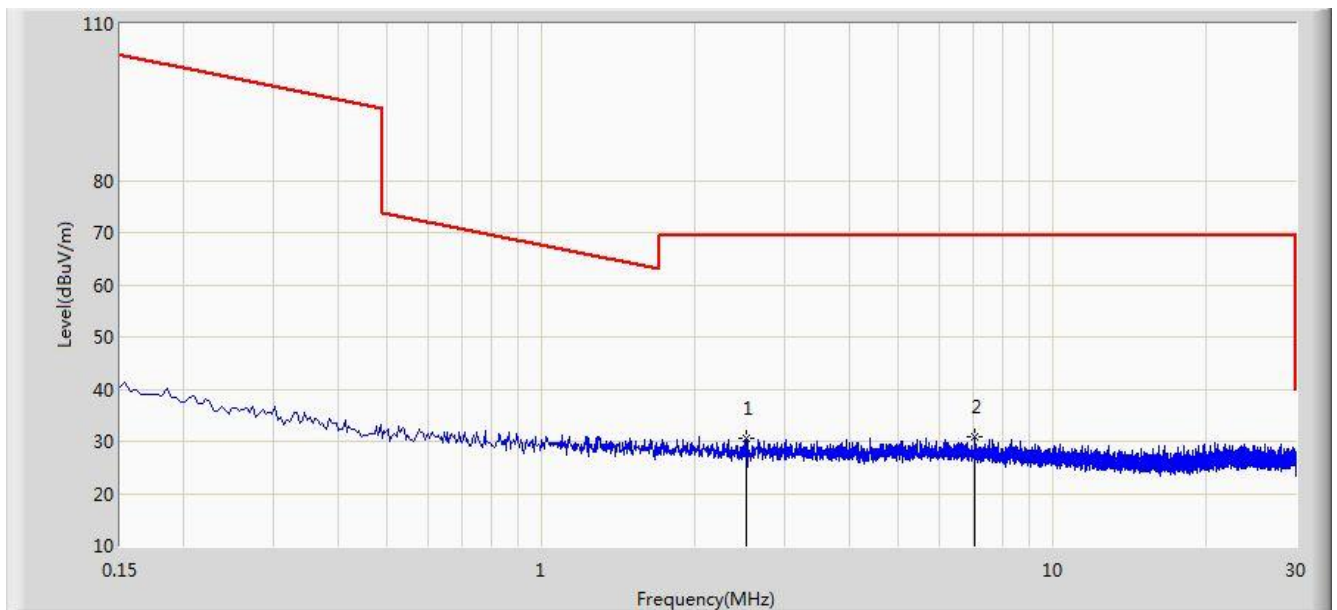


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2.513	30.495	10.336	-39.005	69.500	20.159	QP
2		*	7.041	30.974	10.579	-38.526	69.500	20.395	QP

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/11/25 - 15:45
Limit: FCC_Part15.209_RE(1m)	Engineer: Roy Cheng
Probe: BBHA9170_18-40GHz	Polarity: Horizontal
EUT: Bluetooth Module	Power: DC 3.3V
Note: There is the ambient noise within frequency range 18GHz~25GHz.	

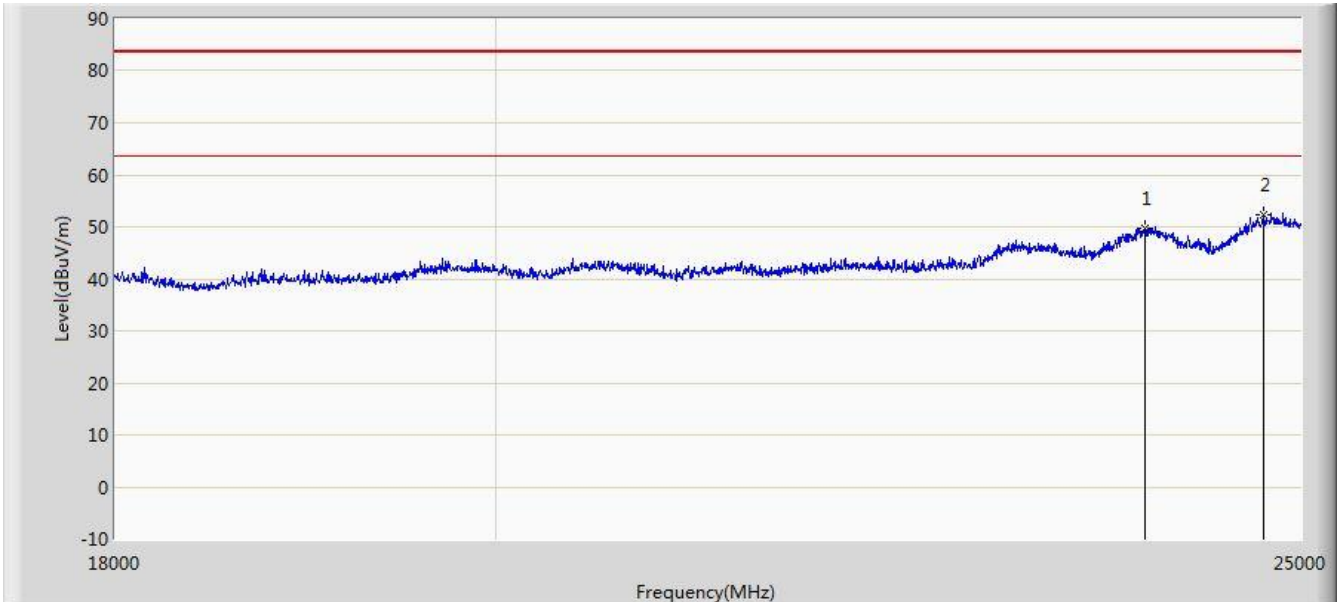


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			23943.000	49.776	35.866	-33.724	83.500	13.910	PK
2		*	24741.000	52.375	37.681	-31.125	83.500	14.694	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2015/11/25 - 15:45
Limit: FCC_Part15.209_RE(1m)	Engineer: Roy Cheng
Probe: BBHA9170_18-40GHz	Polarity: Vertical
EUT: Bluetooth Module	Power: DC 3.3V
Note: There is the ambient noise within frequency range 18GHz~25GHz.	

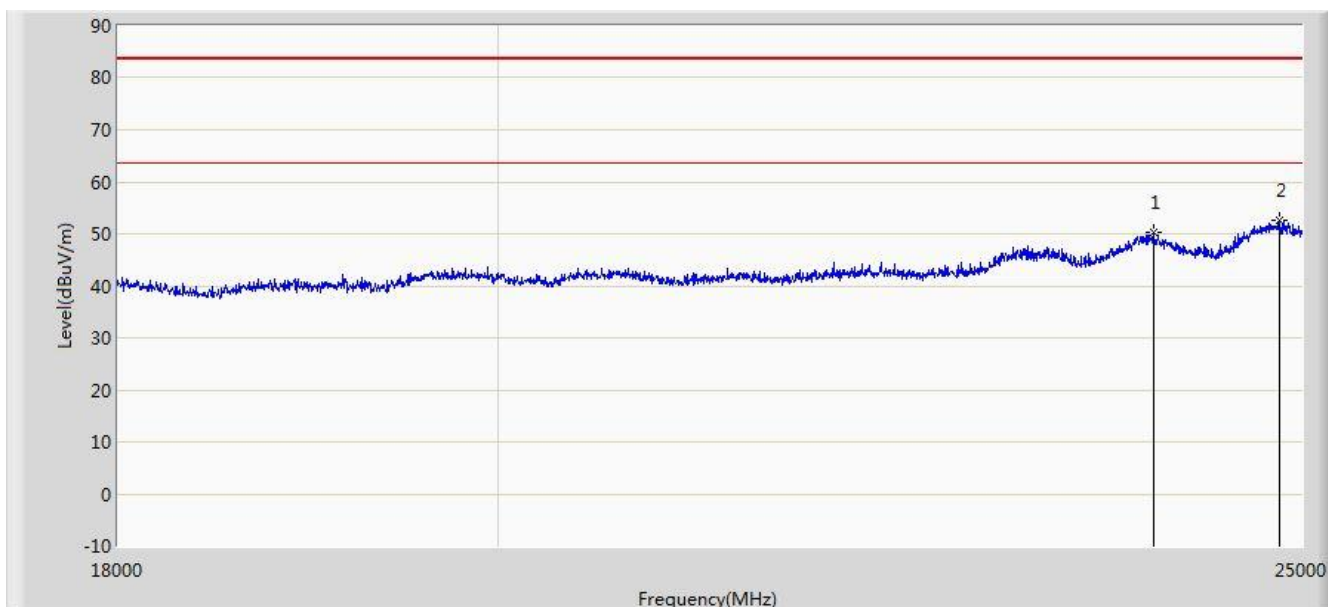

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			23999.000	50.379	36.435	-33.121	83.500	13.944	PK
2		*	24846.000	52.503	37.735	-30.997	83.500	14.768	PK


Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

7.10. Radiated Restricted Band Edge Measurement

7.10.1. Test Result

Site: AC1	Time: 2015/11/27 - 16:10
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Bluetooth Module	Power: DC 3.3V
Test Mode: Transmit by DH5 at Channel 2402MHz	

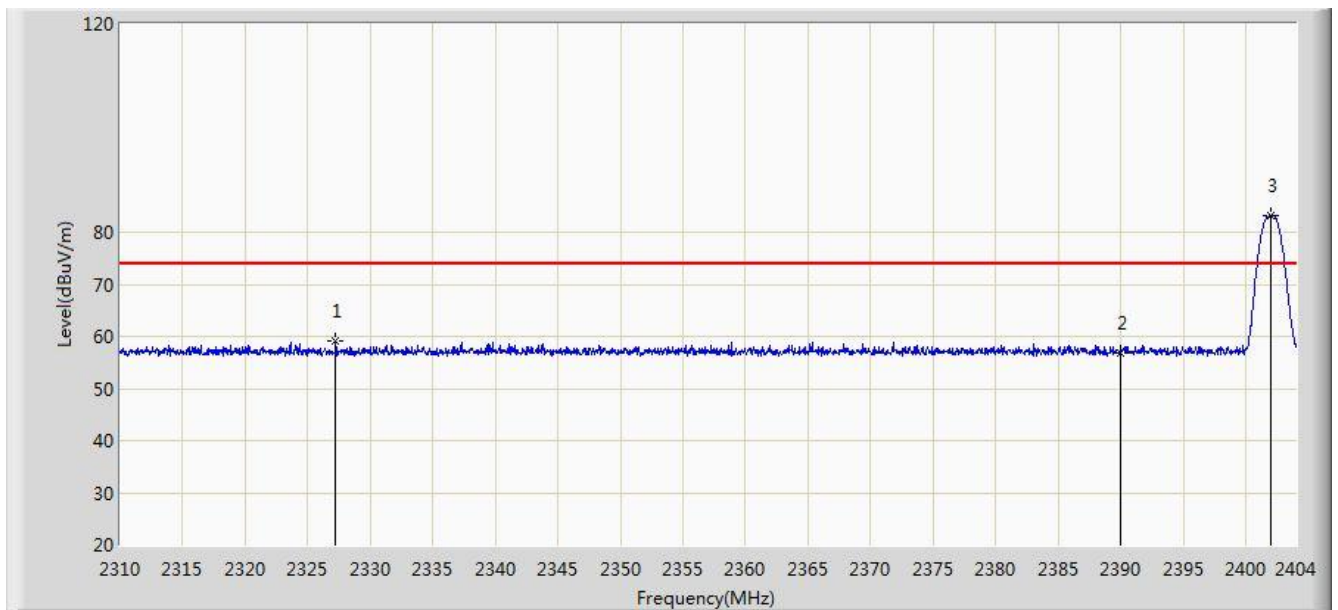


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2327.202	59.006	27.617	-14.994	74.000	31.389	PK
2			2390.000	56.939	25.736	-17.061	74.000	31.203	PK
3		*	2402.026	83.215	52.031	N/A	N/A	31.184	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/11/27 - 16:28
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Bluetooth Module	Power: DC 3.3V
Test Mode: Transmit by DH5 at Channel 2402MHz	

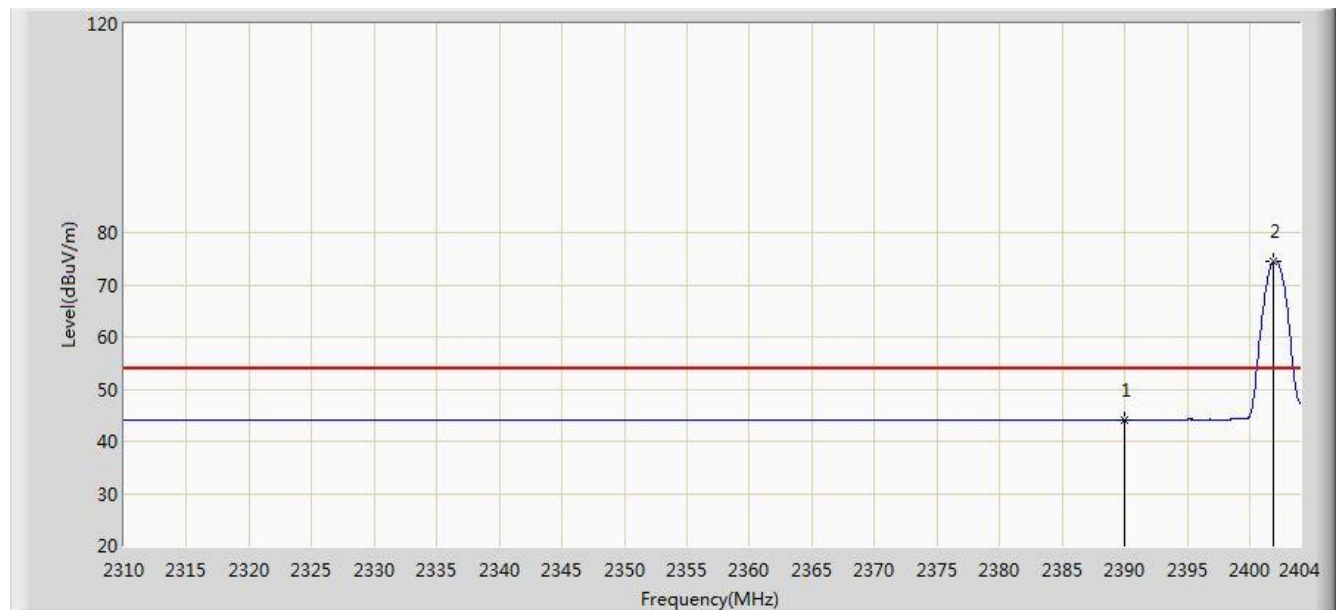


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	44.095	12.892	-9.905	54.000	31.203	AV
2		*	2401.932	74.578	43.394	N/A	N/A	31.184	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/11/27 - 16:29
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Bluetooth Module	Power: DC 3.3V
Test Mode: Transmit by DH5 at Channel 2402MHz	

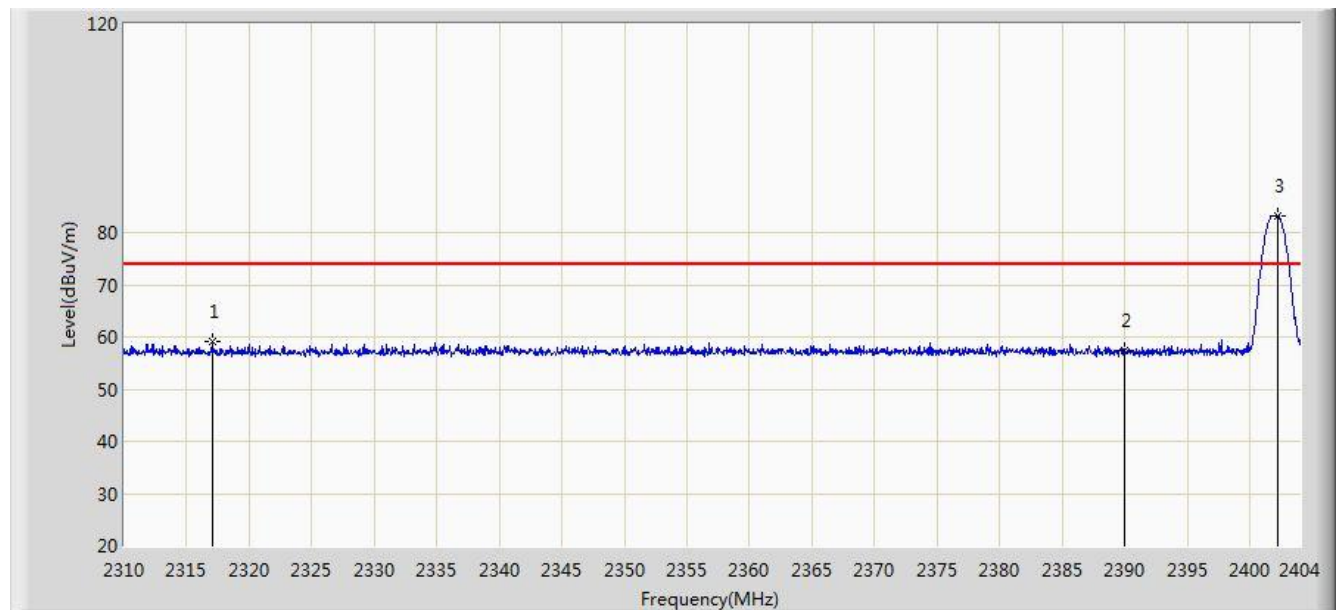


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2317.050	59.221	27.790	-14.779	74.000	31.431	PK
2			2390.000	57.300	26.097	-16.700	74.000	31.203	PK
3		*	2402.214	83.228	52.044	N/A	N/A	31.184	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/11/27 - 16:31
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Bluetooth Module	Power: DC 3.3V
Test Mode: Transmit by DH5 at Channel 2402MHz	

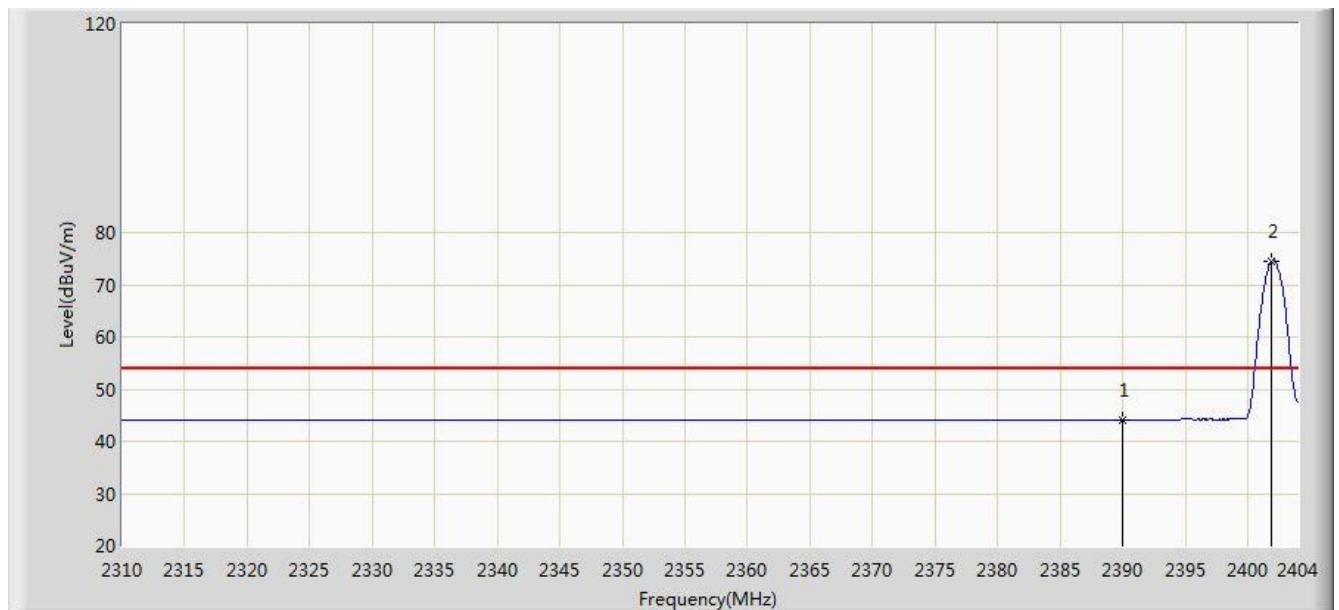


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	44.089	12.886	-9.911	54.000	31.203	AV
2		*	2401.932	74.611	43.427	N/A	N/A	31.184	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/11/27 - 16:32
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Bluetooth Module	Power: DC 3.3V
Test Mode: Transmit by DH5 at Channel 2480MHz	

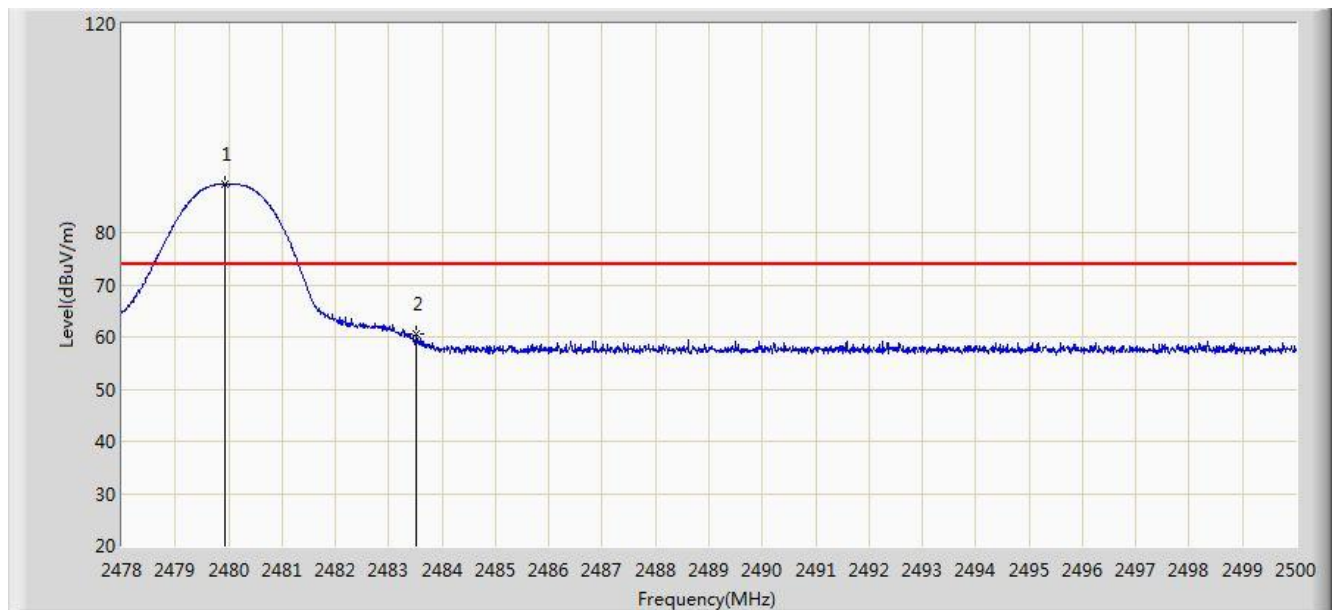


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2479.936	89.190	58.006	N/A	N/A	31.184	PK
2			2483.500	60.462	29.269	-13.538	74.000	31.194	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/11/27 - 16:35
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Bluetooth Module	Power: DC 3.3V
Test Mode: Transmit by DH5 at Channel 2480MHz	

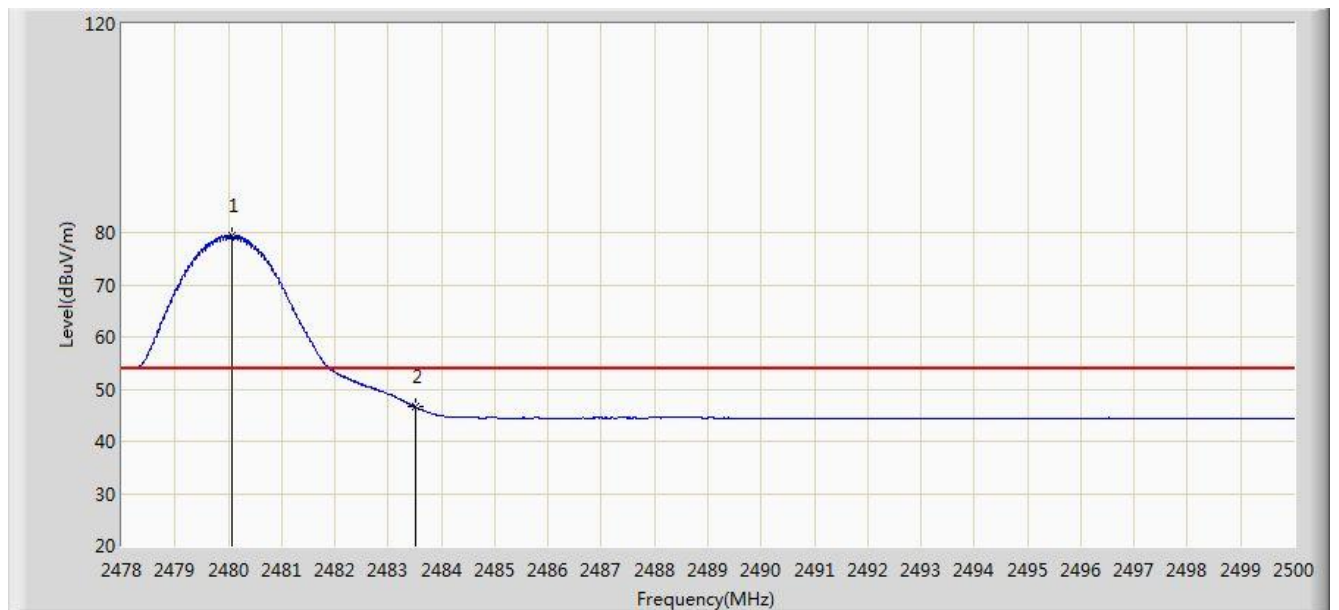


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.068	79.505	48.321	N/A	N/A	31.184	AV
2			2483.500	46.618	15.425	-7.382	54.000	31.194	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/11/27 - 16:35
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Bluetooth Module	Power: DC 3.3V
Test Mode: Transmit by DH5 at Channel 2480MHz	

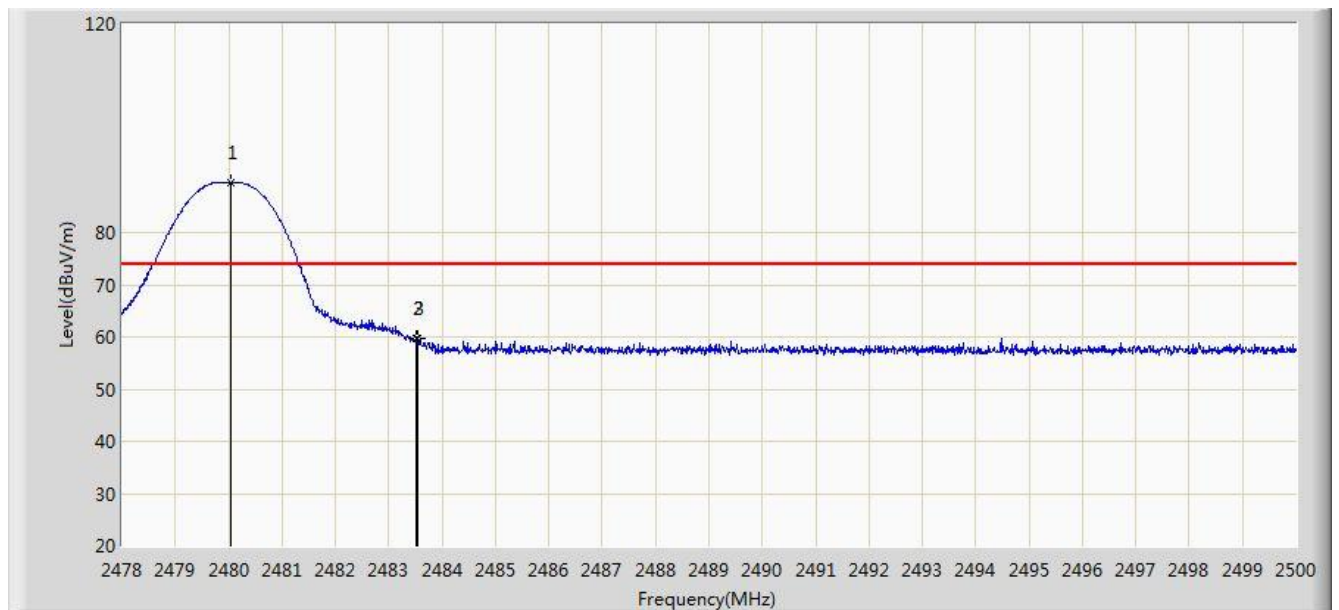


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.046	89.538	58.354	N/A	N/A	31.184	PK
2			2483.500	59.566	28.373	-14.434	74.000	31.194	PK
3			2483.555	59.676	28.483	-14.324	74.000	31.194	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/11/27 - 16:38
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Bluetooth Module	Power: DC 3.3V
Test Mode: Transmit by DH5 at Channel 2480MHz	

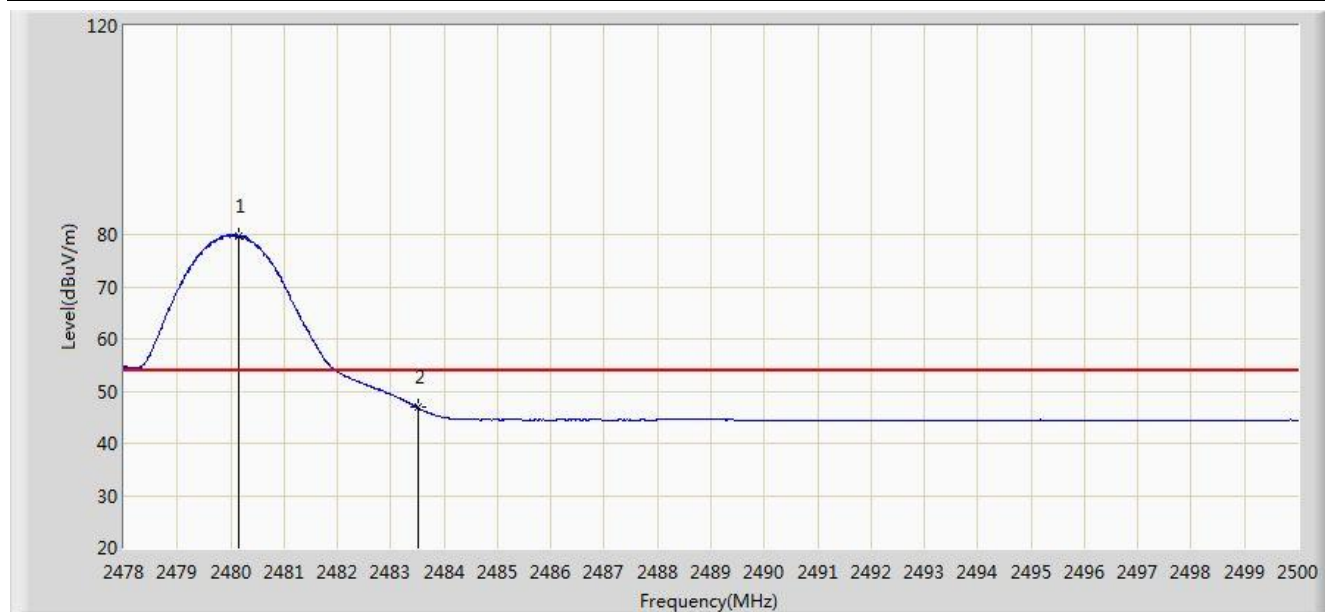


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.145	79.853	48.669	N/A	N/A	31.185	AV
2			2483.500	46.815	15.622	-7.185	54.000	31.194	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/11/27 - 16:39
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Bluetooth Module	Power: DC 3.3V
Test Mode: Transmit by 2DH5 at Channel 2402MHz	

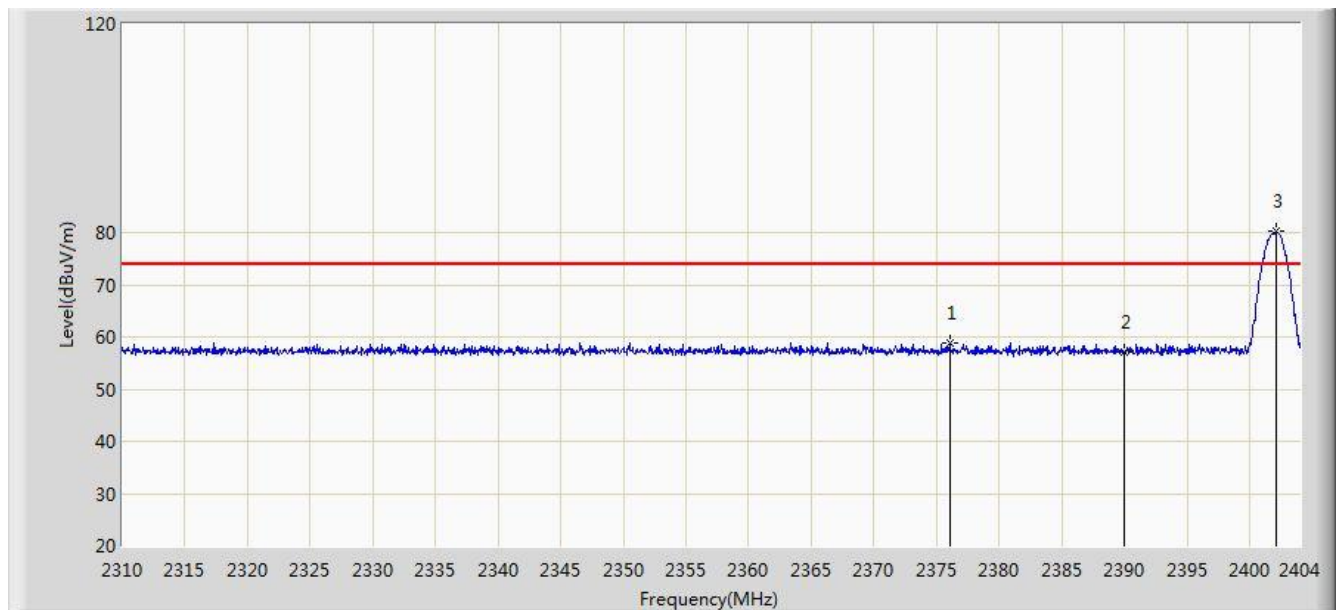


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2376.035	58.912	27.684	-15.088	74.000	31.228	PK
2			2390.000	57.123	25.920	-16.877	74.000	31.203	PK
3		*	2402.167	80.171	48.987	N/A	N/A	31.184	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/11/27 - 16:43
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Bluetooth Module	Power: DC 3.3V
Test Mode: Transmit by 2DH5 at Channel 2402MHz	

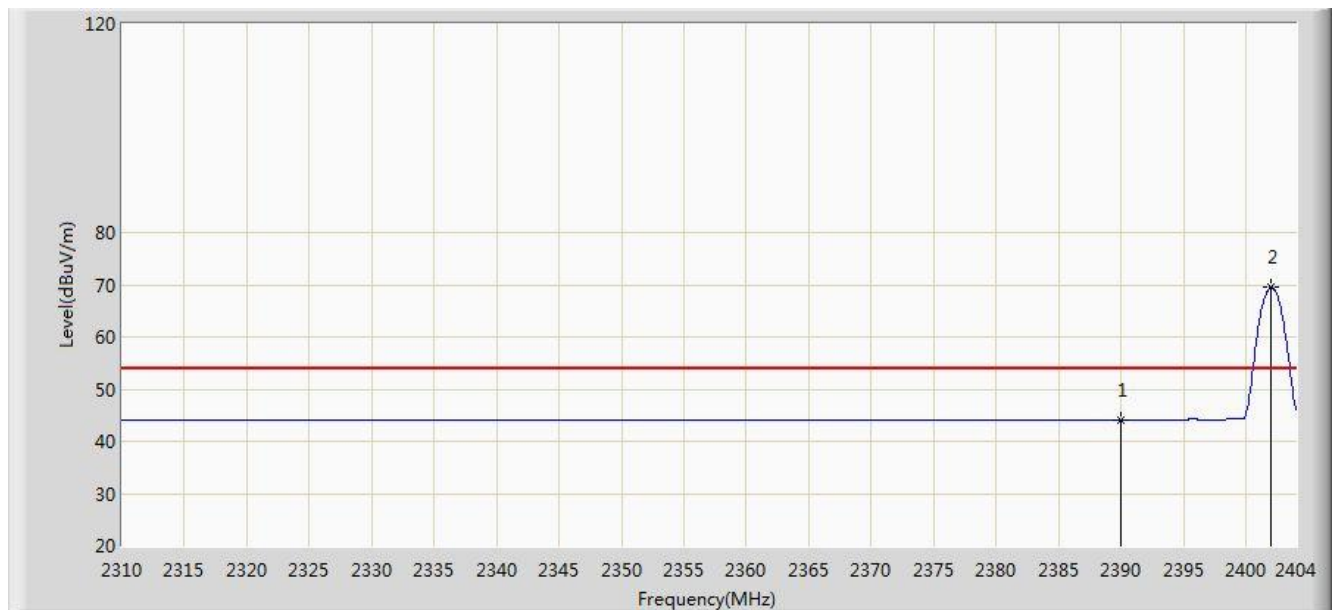


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	44.108	12.905	-9.892	54.000	31.203	AV
2		*	2401.979	69.560	38.376	N/A	N/A	31.184	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/11/27 - 16:44
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Bluetooth Module	Power: DC 3.3V
Test Mode: Transmit by 2DH5 at Channel 2402MHz	

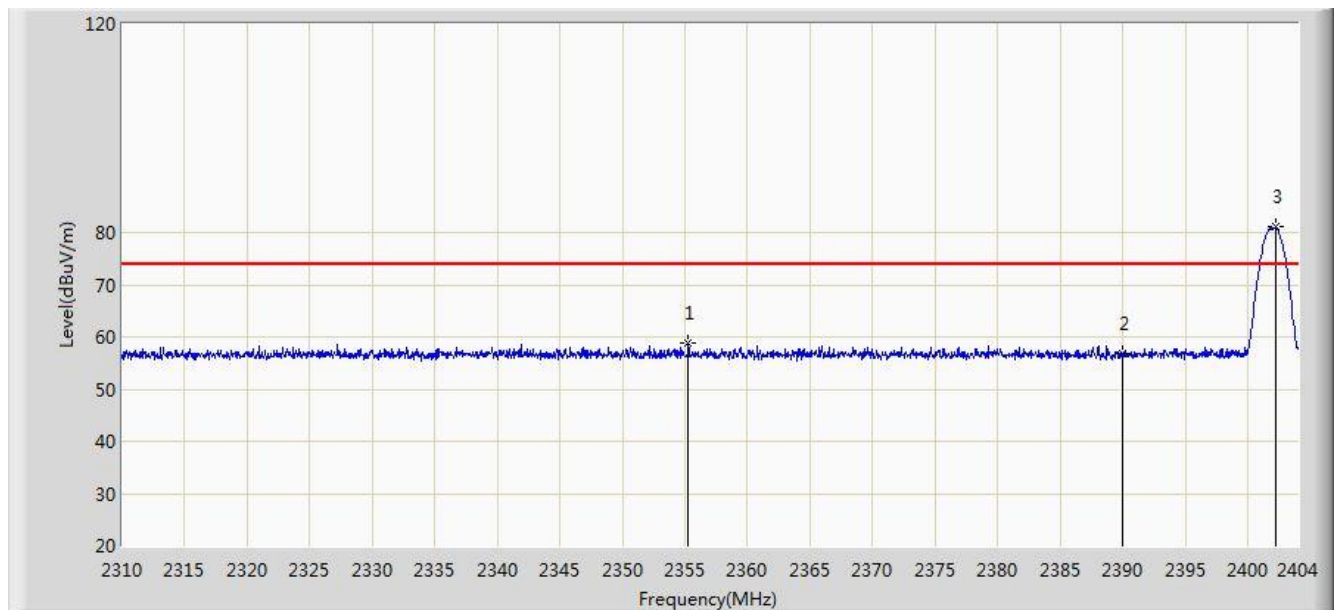


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2355.261	58.929	27.656	-15.071	74.000	31.273	PK
2			2390.000	56.760	25.557	-17.240	74.000	31.203	PK
3		*	2402.214	81.163	49.979	N/A	N/A	31.184	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/11/27 - 16:44
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Bluetooth Module	Power: DC 3.3V
Test Mode: Transmit by 2DH5 at Channel 2402MHz	

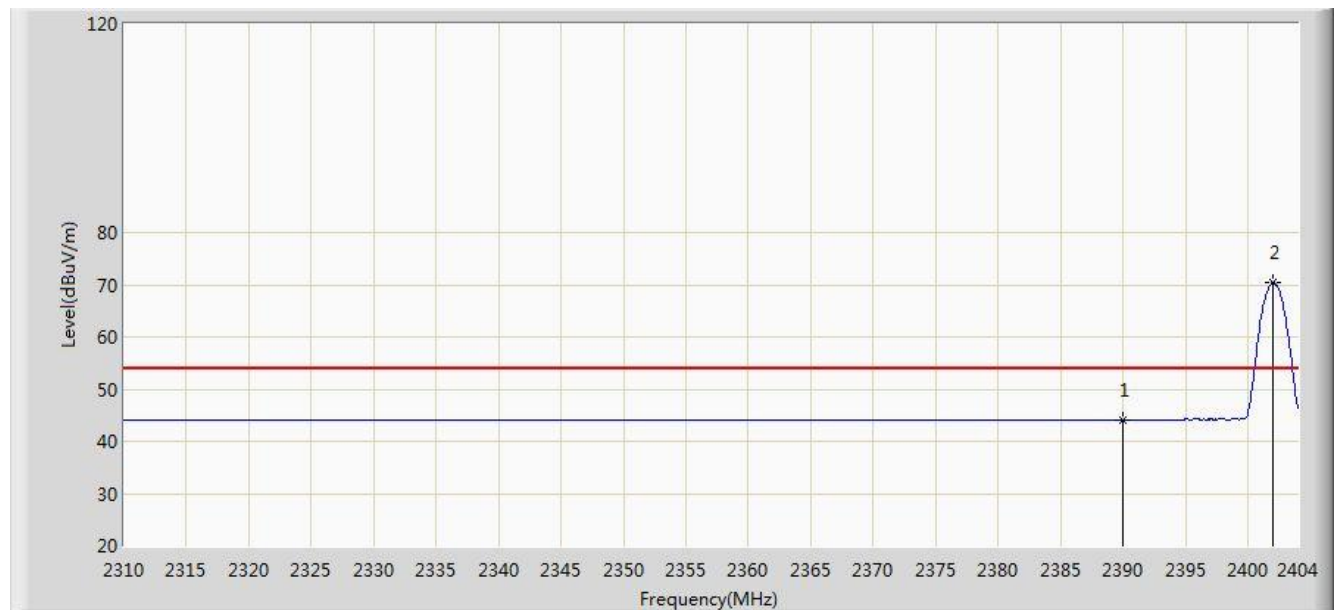


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	44.059	12.856	-9.941	54.000	31.203	AV
2		*	2401.979	70.492	39.308	N/A	N/A	31.184	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/11/27 - 16:45
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Bluetooth Module	Power: DC 3.3V
Test Mode: Transmit by 2DH5 at Channel 2480MHz	

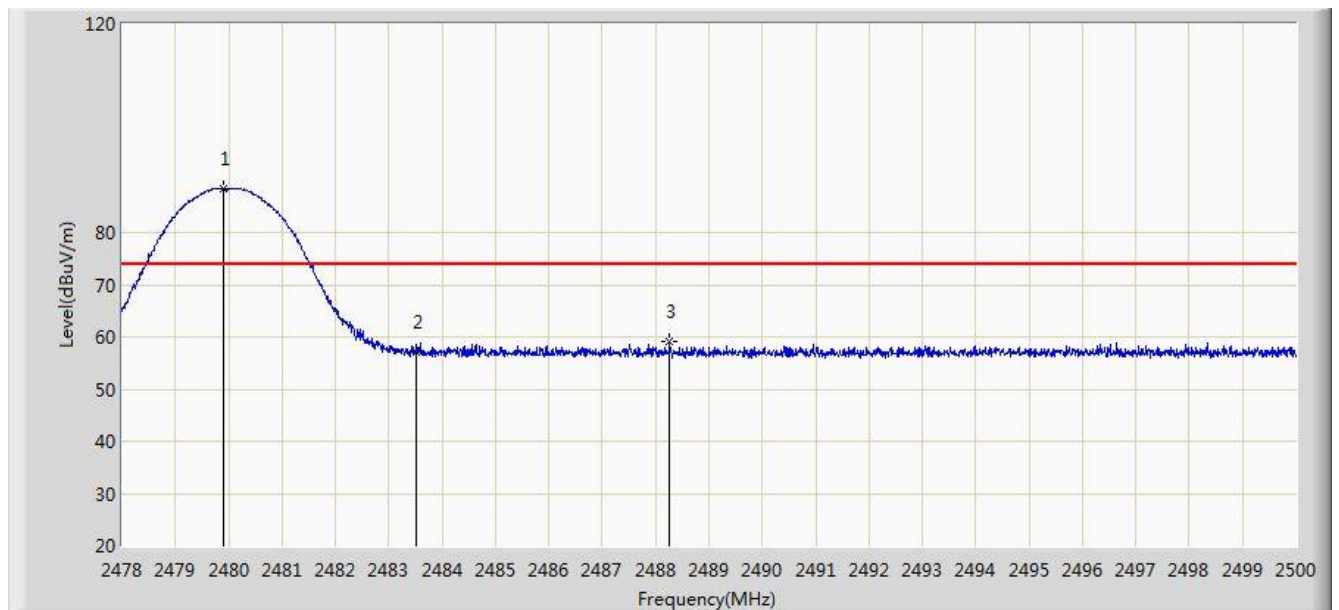


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2479.903	88.515	57.331	N/A	N/A	31.184	PK
2			2483.500	56.968	25.775	-17.032	74.000	31.194	PK
3			2488.263	59.114	27.908	-14.886	74.000	31.206	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/11/27 - 16:46
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Bluetooth Module	Power: DC 3.3V
Test Mode: Transmit by 2DH5 at Channel 2480MHz	

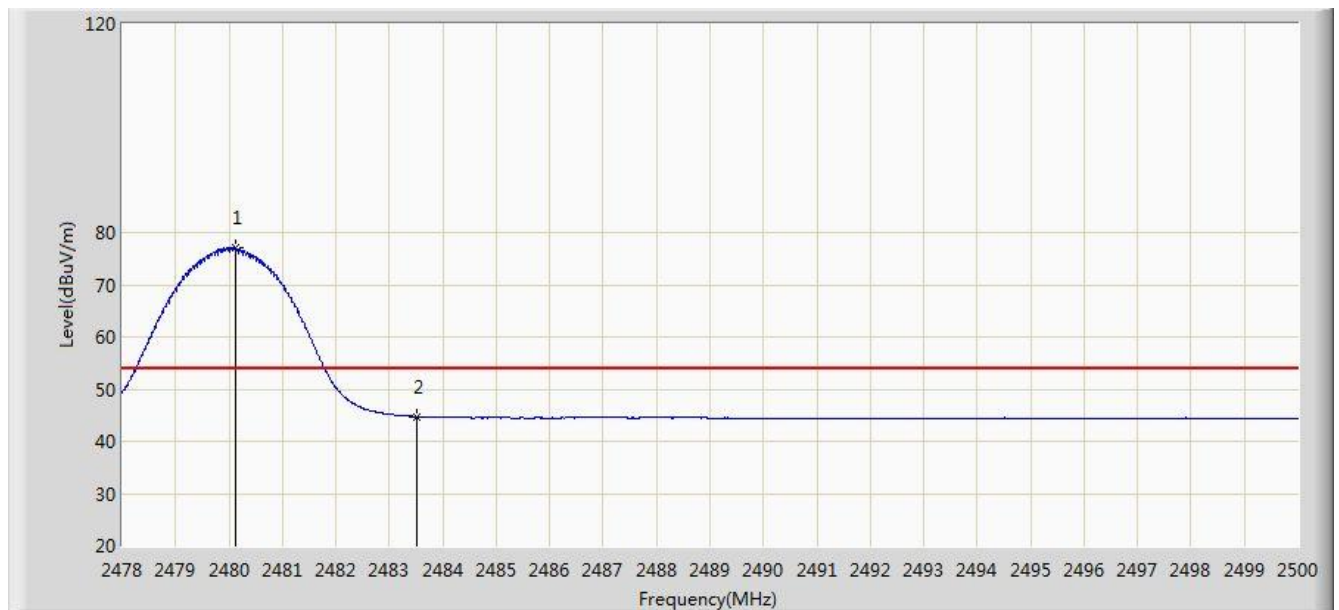


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.112	76.993	45.809	N/A	N/A	31.184	AV
2			2483.500	44.732	13.539	-9.268	54.000	31.194	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/11/27 - 16:46
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Bluetooth Module	Power: DC 3.3V
Test Mode: Transmit by 2DH5 at Channel 2480MHz	

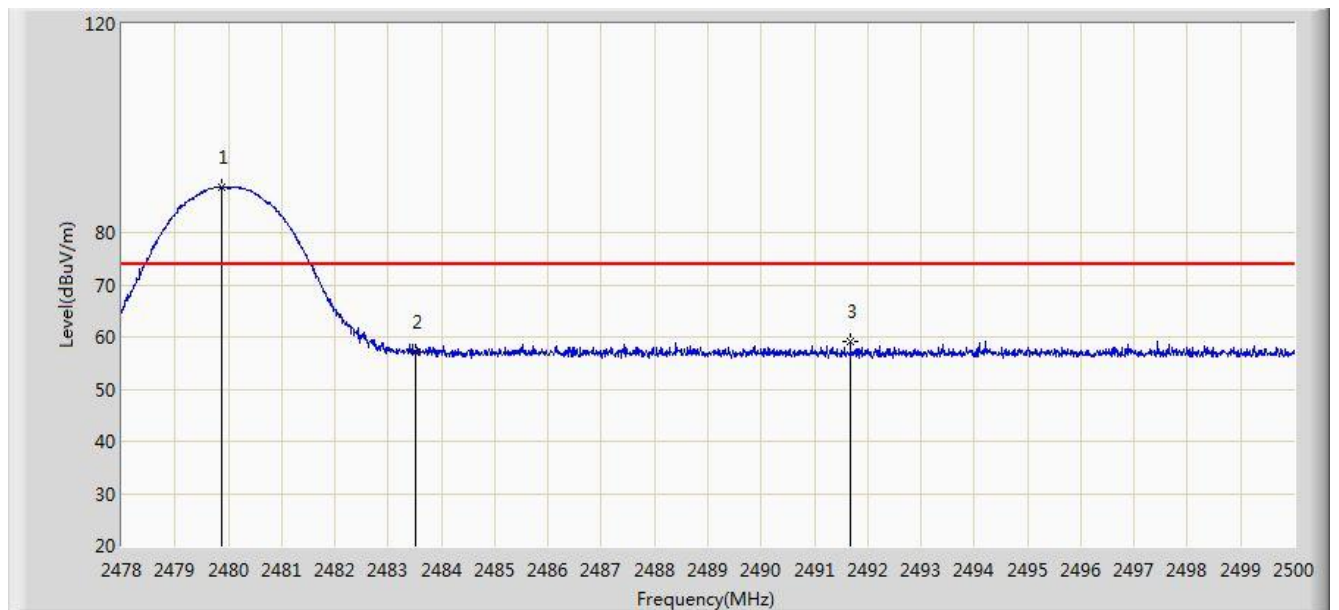


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2479.870	88.596	57.412	N/A	N/A	31.184	PK
2			2483.500	57.088	25.895	-16.912	74.000	31.194	PK
3			2491.673	59.076	27.861	-14.924	74.000	31.214	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/11/27 - 16:47
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Bluetooth Module	Power: DC 3.3V
Test Mode: Transmit by 2DH5 at Channel 2480MHz	

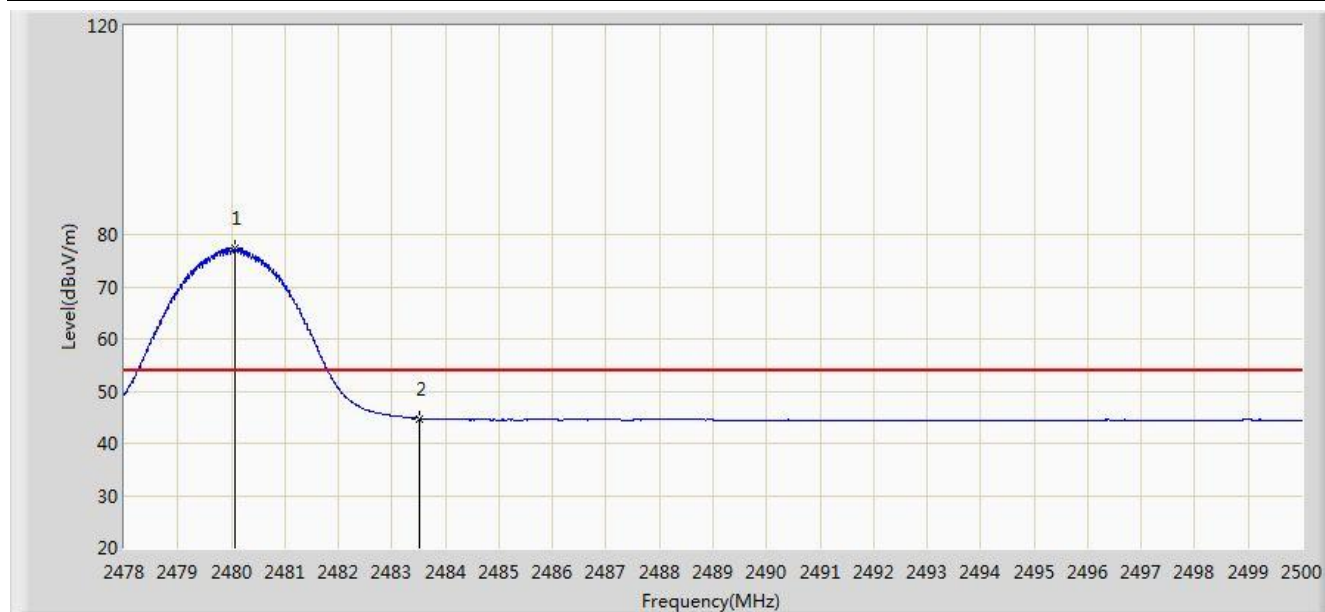


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.057	77.332	46.148	N/A	N/A	31.184	AV
2			2483.500	44.773	13.580	-9.227	54.000	31.194	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/11/27 - 16:50
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Bluetooth Module	Power: DC 3.3V
Test Mode: Transmit by 3DH5 at Channel 2402MHz	

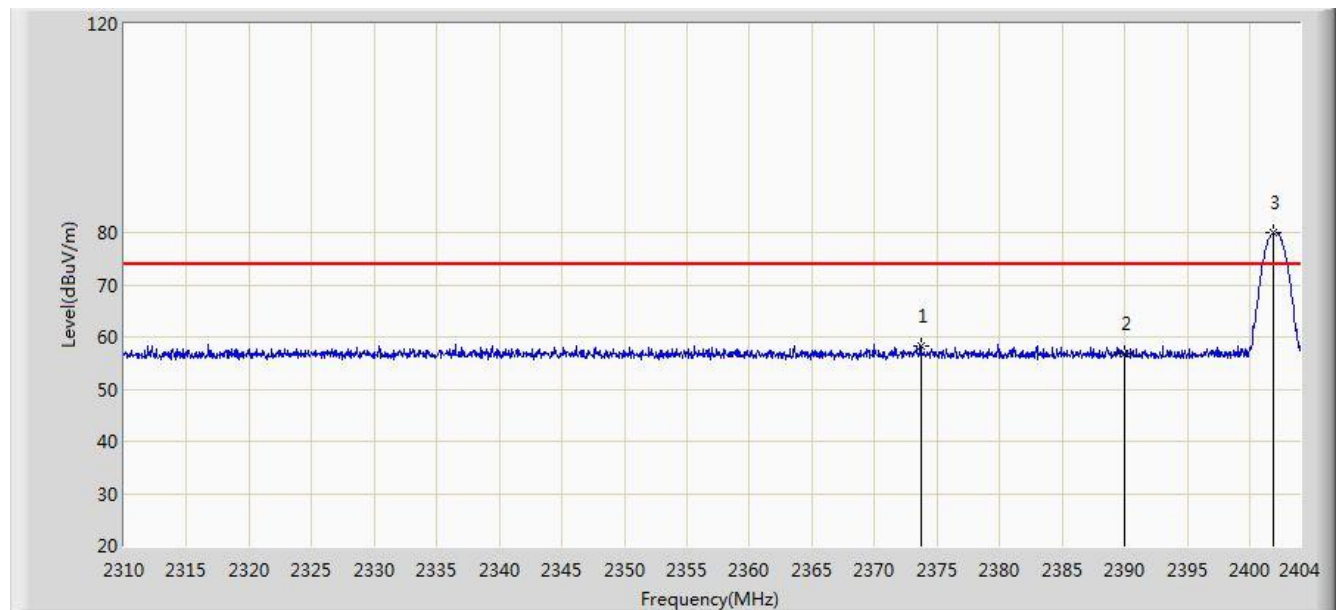


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2373.685	58.140	26.907	-15.860	74.000	31.233	PK
2			2390.000	56.705	25.502	-17.295	74.000	31.203	PK
3		*	2401.885	80.111	48.927	N/A	N/A	31.184	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/11/27 - 16:51
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Bluetooth Module	Power: DC 3.3V
Test Mode: Transmit by 3DH5 at Channel 2402MHz	

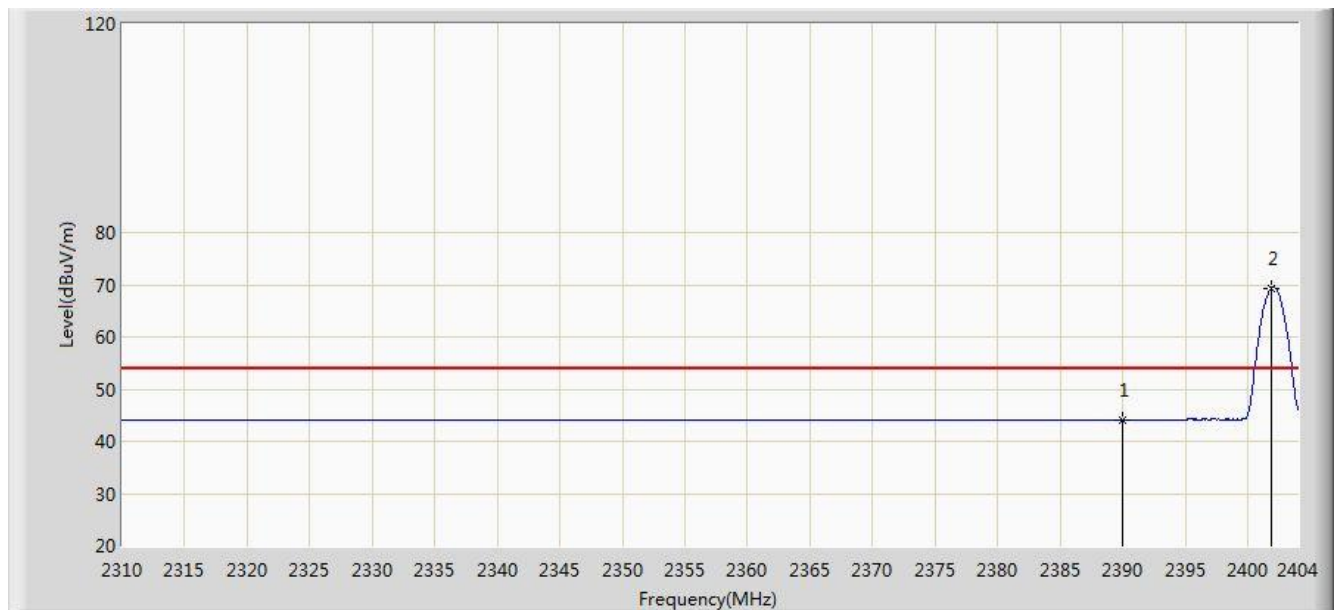


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	44.140	12.937	-9.860	54.000	31.203	AV
2		*	2401.885	69.310	38.126	N/A	N/A	31.184	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/11/27 - 16:52
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Bluetooth Module	Power: DC 3.3V
Test Mode: Transmit by 3DH5 at Channel 2402MHz	

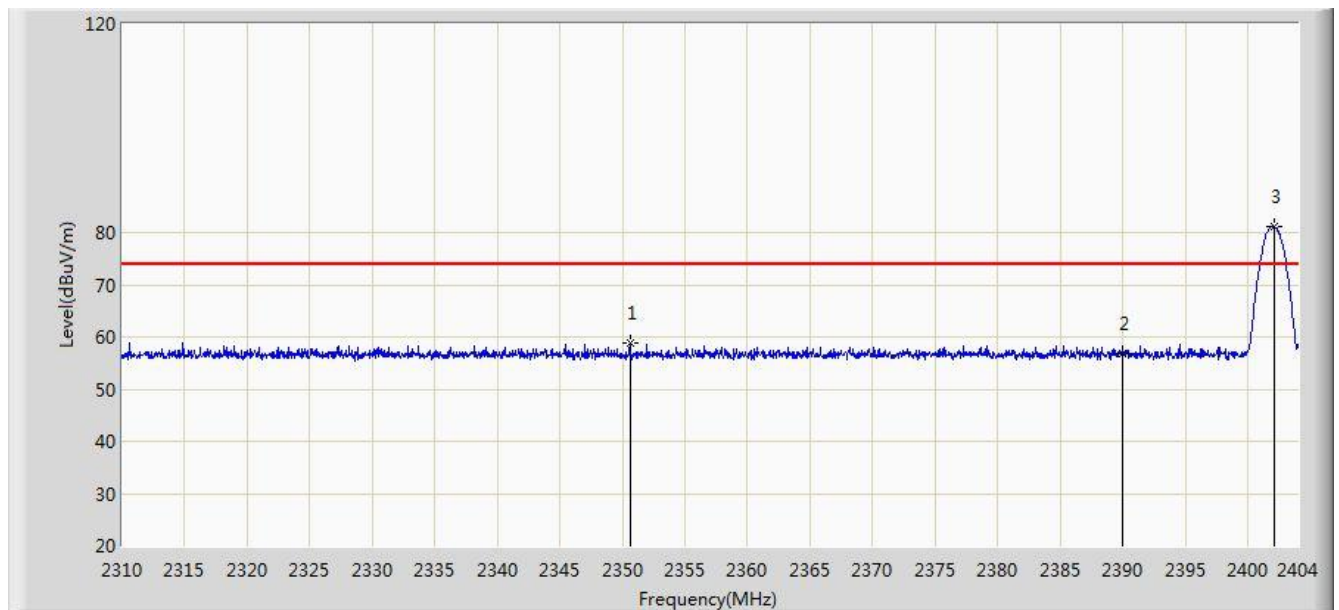


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2350.608	58.784	27.494	-15.216	74.000	31.291	PK
2			2390.000	56.917	25.714	-17.083	74.000	31.203	PK
3		*	2402.073	81.241	50.057	N/A	N/A	31.184	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/11/27 - 16:53
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Bluetooth Module	Power: DC 3.3V
Test Mode: Transmit by 3DH5 at Channel 2402MHz	

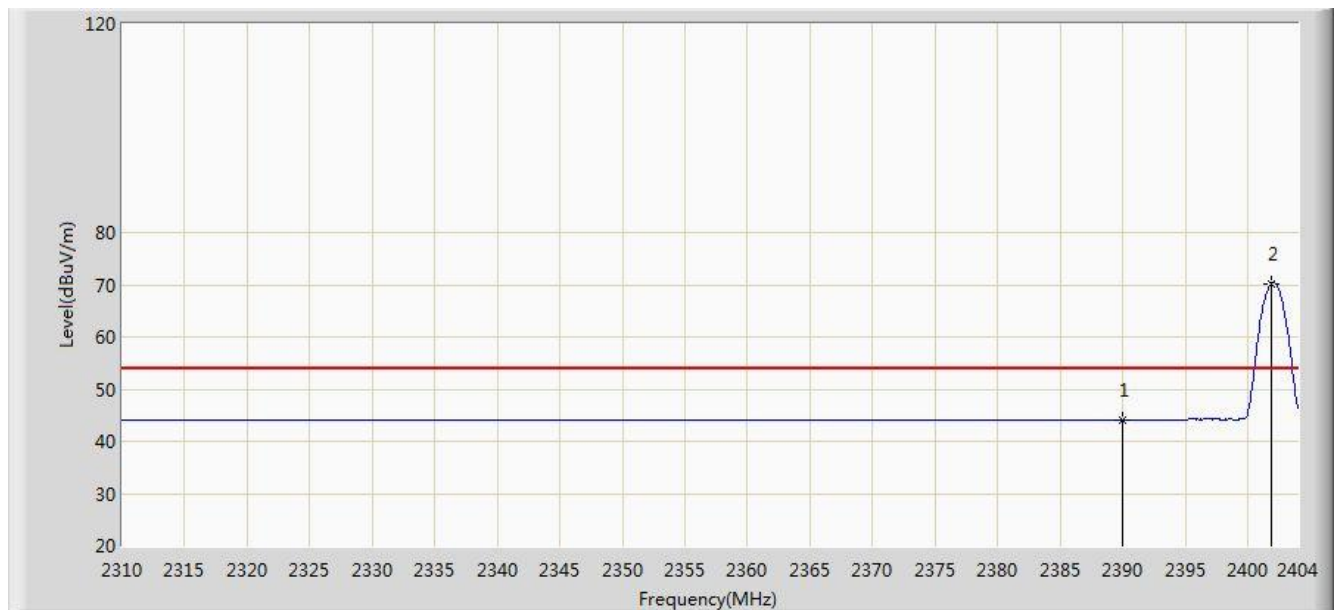


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	44.094	12.891	-9.906	54.000	31.203	AV
2		*	2401.885	70.236	39.052	N/A	N/A	31.184	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/11/27 - 16:53
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Bluetooth Module	Power: DC 3.3V
Test Mode: Transmit by 3DH5 at Channel 2480MHz	

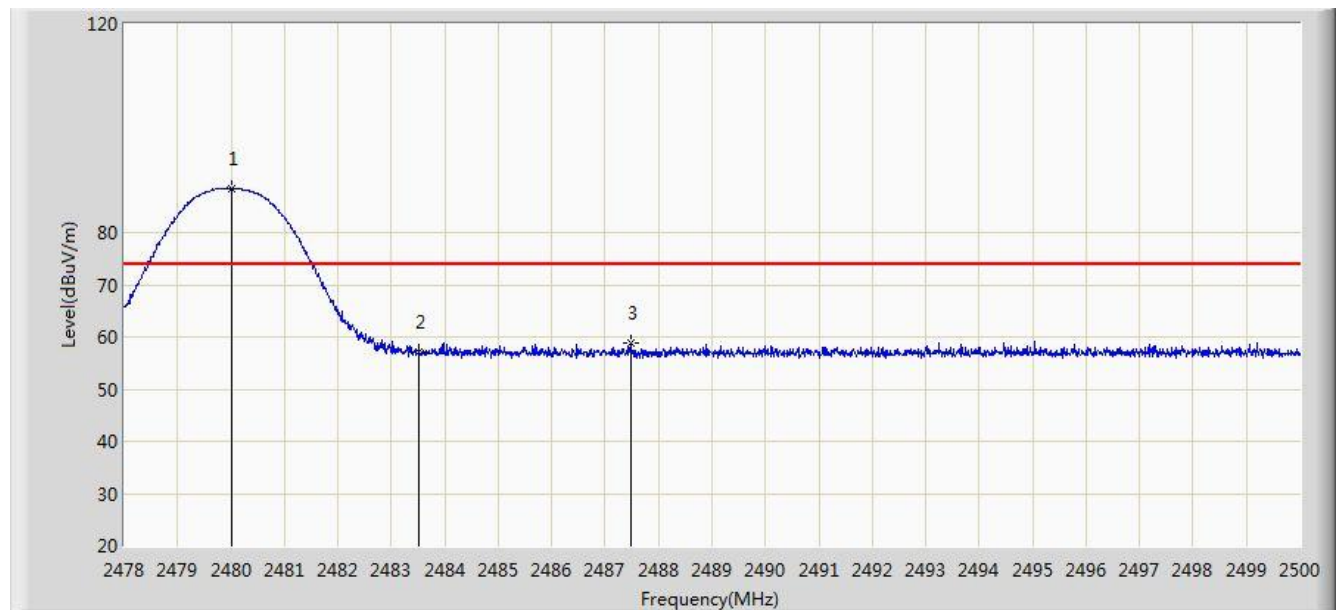


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.002	88.534	57.350	N/A	N/A	31.184	PK
2			2483.500	57.089	25.896	-16.911	74.000	31.194	PK
3			2487.471	58.710	27.506	-15.290	74.000	31.204	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/11/27 - 16:54
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Bluetooth Module	Power: DC 3.3V
Test Mode: Transmit by 3DH5 at Channel 2480MHz	

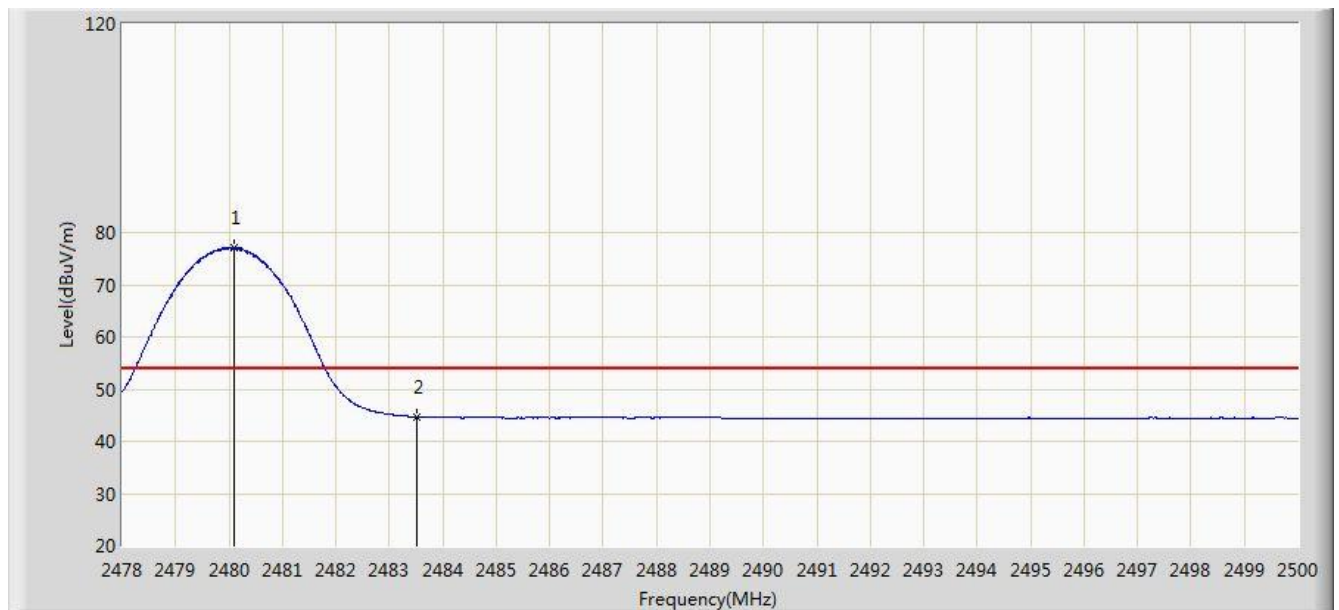


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.090	77.123	45.939	N/A	N/A	31.184	AV
2			2483.500	44.731	13.538	-9.269	54.000	31.194	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/11/27 - 16:55
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Bluetooth Module	Power: DC 3.3V
Test Mode: Transmit by 3DH5 at Channel 2480MHz	

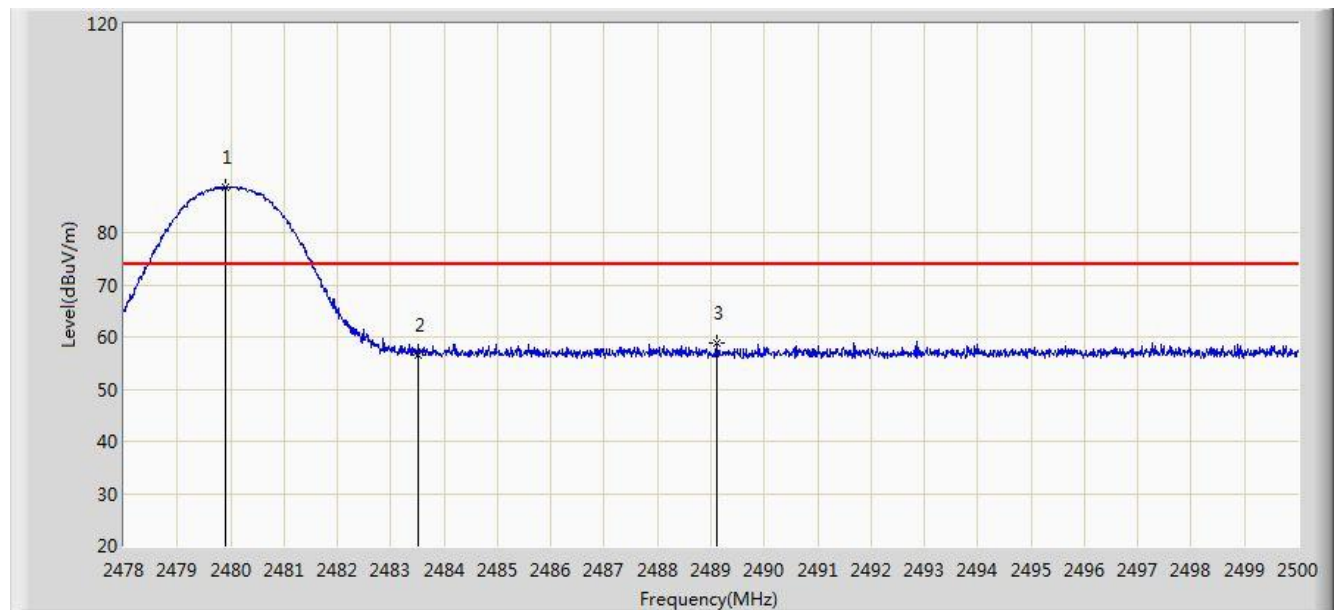


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2479.903	88.700	57.516	N/A	N/A	31.184	PK
2			2483.500	56.424	25.231	-17.576	74.000	31.194	PK
3			2489.099	58.740	27.532	-15.260	74.000	31.208	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/11/27 - 16:56
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Bluetooth Module	Power: DC 3.3V
Test Mode: Transmit by 3DH5 at Channel 2480MHz	

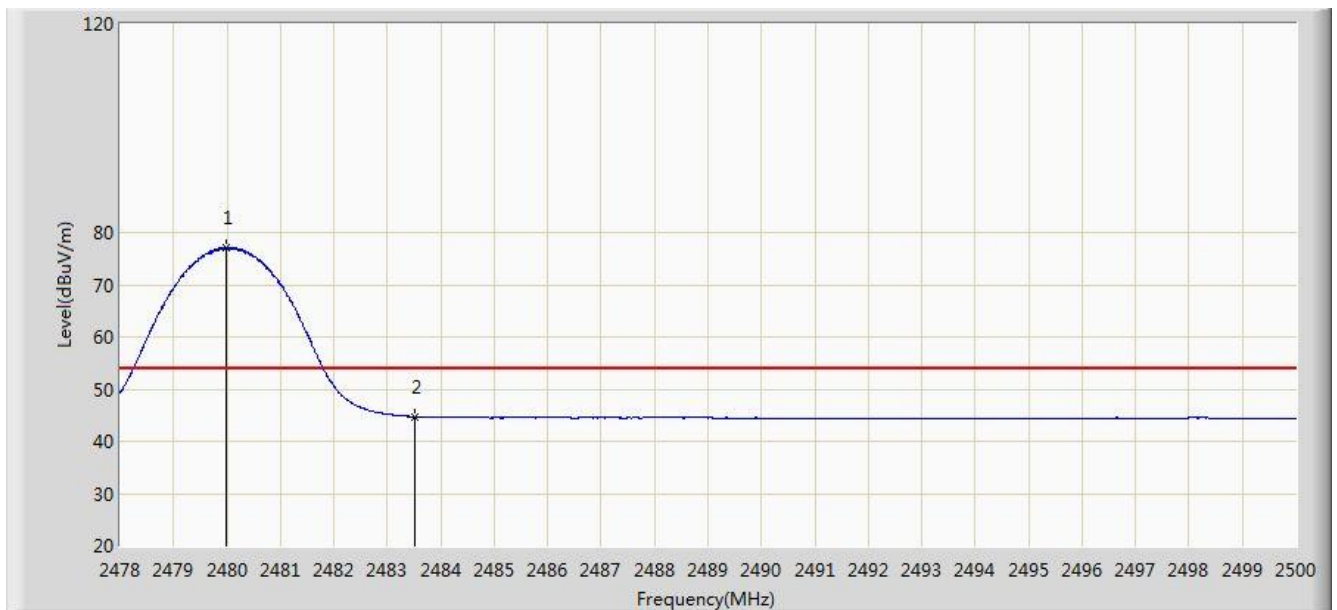

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2479.980	77.149	45.965	N/A	N/A	31.184	AV
2			2483.500	44.710	13.517	-9.290	54.000	31.194	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

7.11. AC Conducted Emissions Measurement


7.11.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dB μ V)	Average (dB μ V)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.11.2. Test Setup

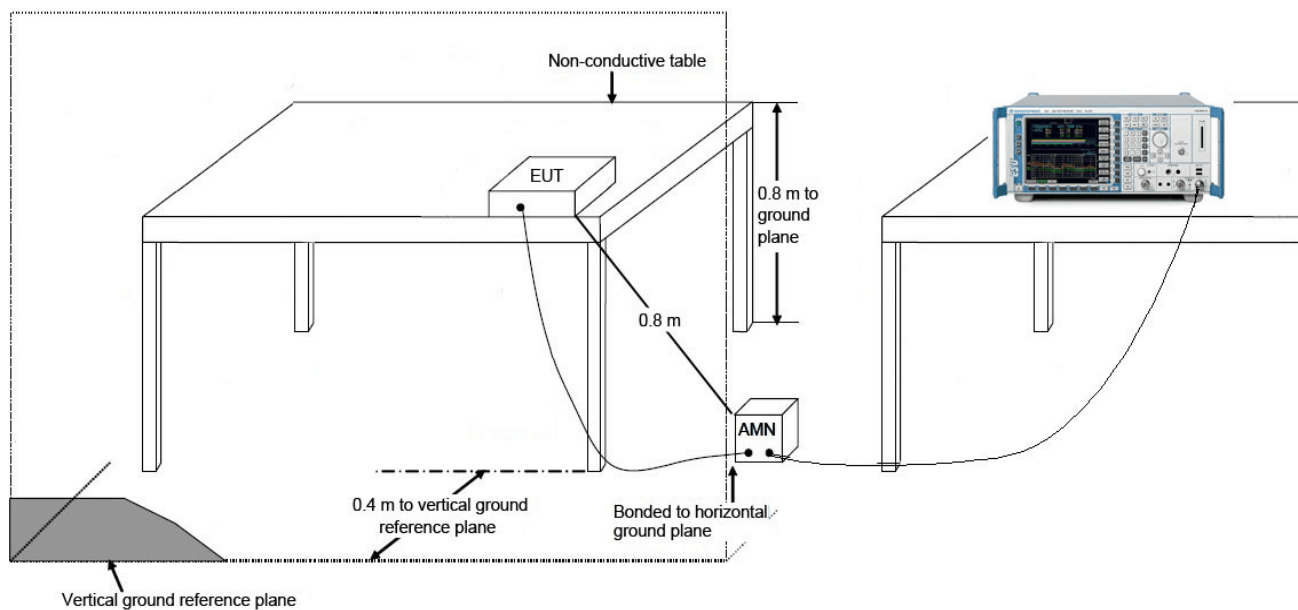

7.11.3. Test Result

Site: SR2	Time: 2015/12/01 - 10:04
Limit: FCC_Part15.207_CE_AC Power	Engineer: Roy Cheng
Probe: ENV216_101683_Filter On	Polarity: Line
EUT: Bluetooth Module	Power: AC 120V/60Hz
Test Mode: Transmit by 2DH5 at Channel 2480MHz	

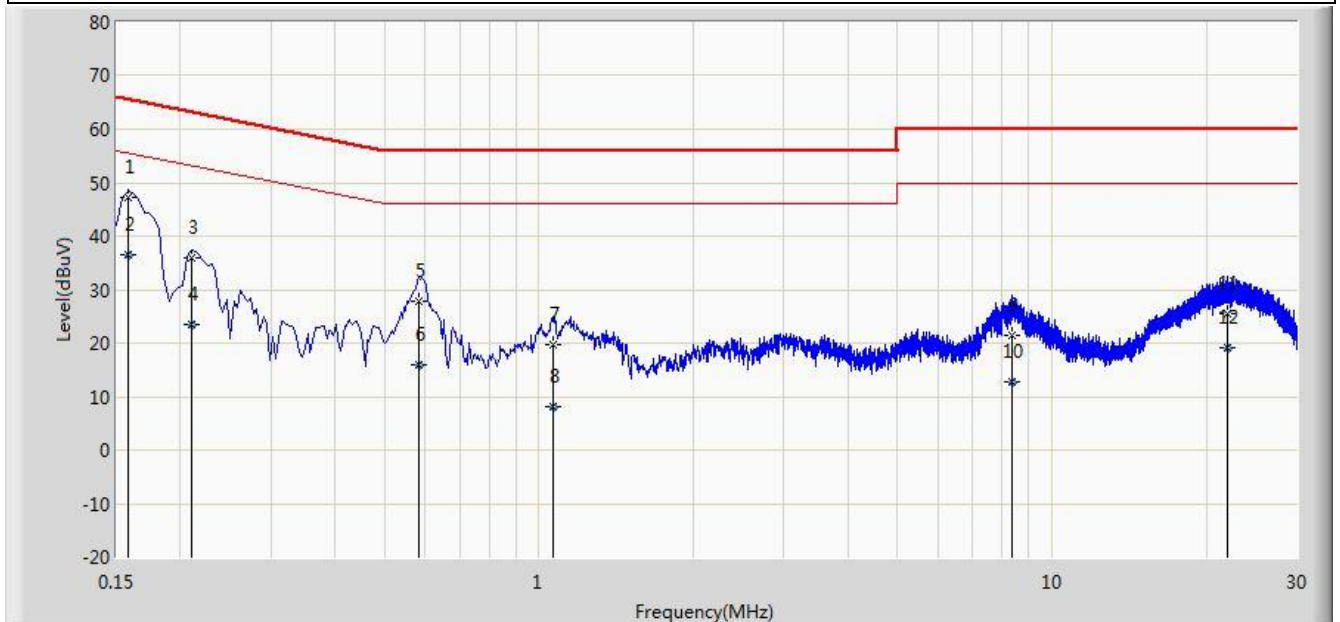


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1		*	0.158	47.267	36.956	-18.301	65.568	10.311	QP
2			0.158	36.406	26.095	-19.162	55.568	10.311	AV
3			0.210	35.815	25.846	-27.390	63.205	9.969	QP
4			0.210	23.548	13.579	-29.657	53.205	9.969	AV
5			0.582	27.921	17.797	-28.079	56.000	10.124	QP
6			0.582	15.944	5.820	-30.056	46.000	10.124	AV
7			1.062	19.684	9.778	-36.316	56.000	9.906	QP
8			1.062	8.060	-1.846	-37.940	46.000	9.906	AV
9			8.370	21.307	11.139	-38.693	60.000	10.169	QP
10			8.370	12.694	2.525	-37.306	50.000	10.169	AV
11			21.990	25.384	15.216	-34.616	60.000	10.168	QP
12			21.990	19.026	8.857	-30.974	50.000	10.168	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

Site: SR2	Time: 2015/12/01 - 10:08
Limit: FCC_Part15.207_CE_AC Power	Engineer: Roy Cheng
Probe: ENV216_101683_Filter On	Polarity: Neutral
EUT: Bluetooth Module	Power: AC 120V/60Hz
Test Mode: Transmit by 2DH5 at Channel 2480MHz	

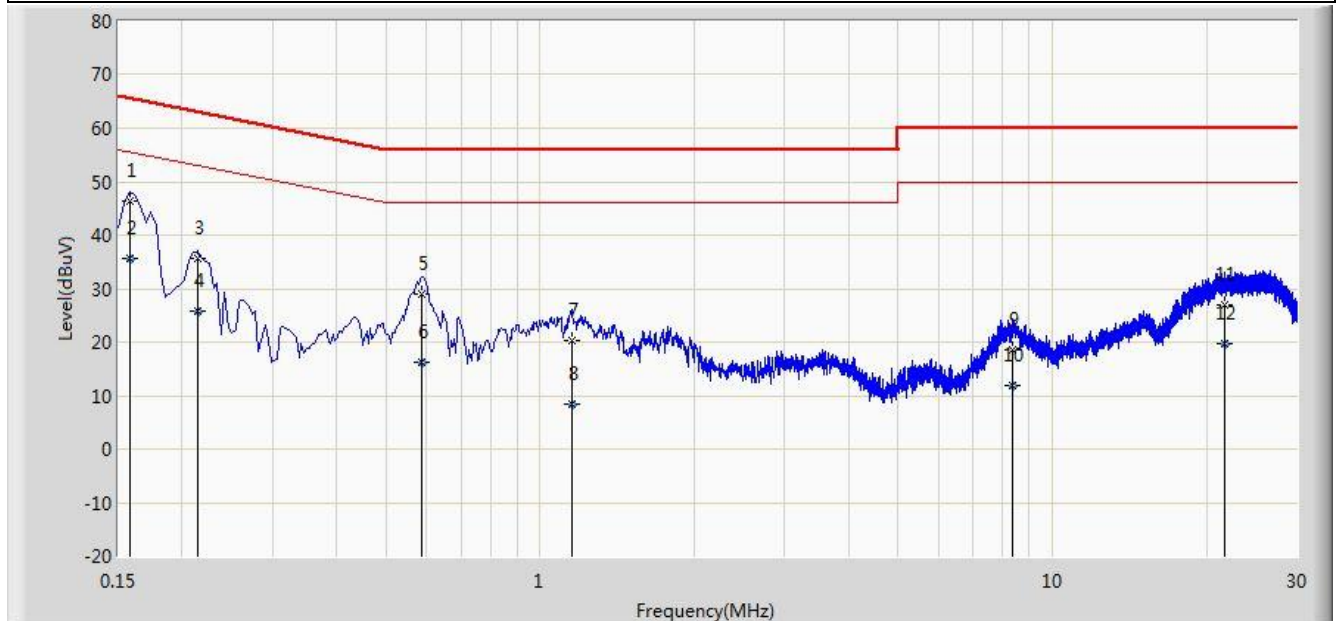

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1		*	0.158	46.352	36.062	-19.217	65.568	10.290	QP
2			0.158	35.680	25.391	-19.888	55.568	10.290	AV
3			0.214	35.614	25.626	-27.435	63.049	9.988	QP
4			0.214	25.679	15.691	-27.370	53.049	9.988	AV
5			0.586	29.019	18.881	-26.981	56.000	10.139	QP
6			0.586	16.216	6.077	-29.784	46.000	10.139	AV
7			1.150	20.242	10.338	-35.758	56.000	9.904	QP
8			1.150	8.376	-1.528	-37.624	46.000	9.904	AV
9			8.366	18.483	8.297	-41.517	60.000	10.185	QP
10			8.366	11.832	1.647	-38.168	50.000	10.185	AV
11			21.654	26.932	16.716	-33.068	60.000	10.216	QP
12			21.654	19.743	9.527	-30.257	50.000	10.216	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

8. CONCLUSION

The data collected relate only the item(s) tested and show that the **Bluetooth Module FCC ID: H8N-BLT2010** is in compliance with Part 15C of the FCC Rules.

The End