
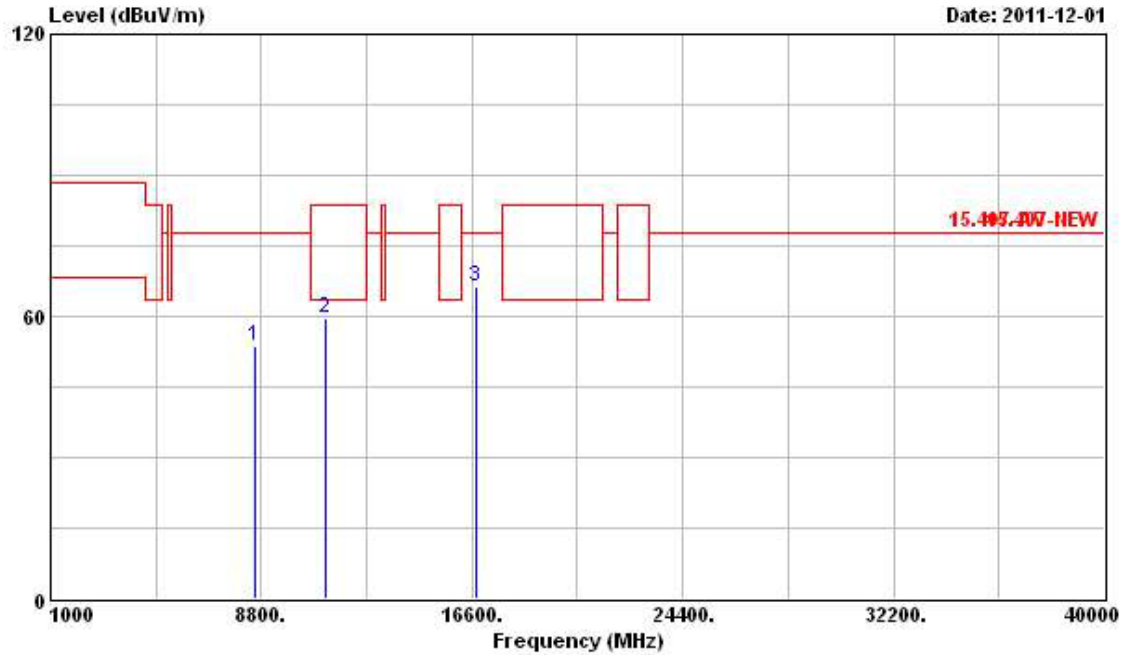


Vertical

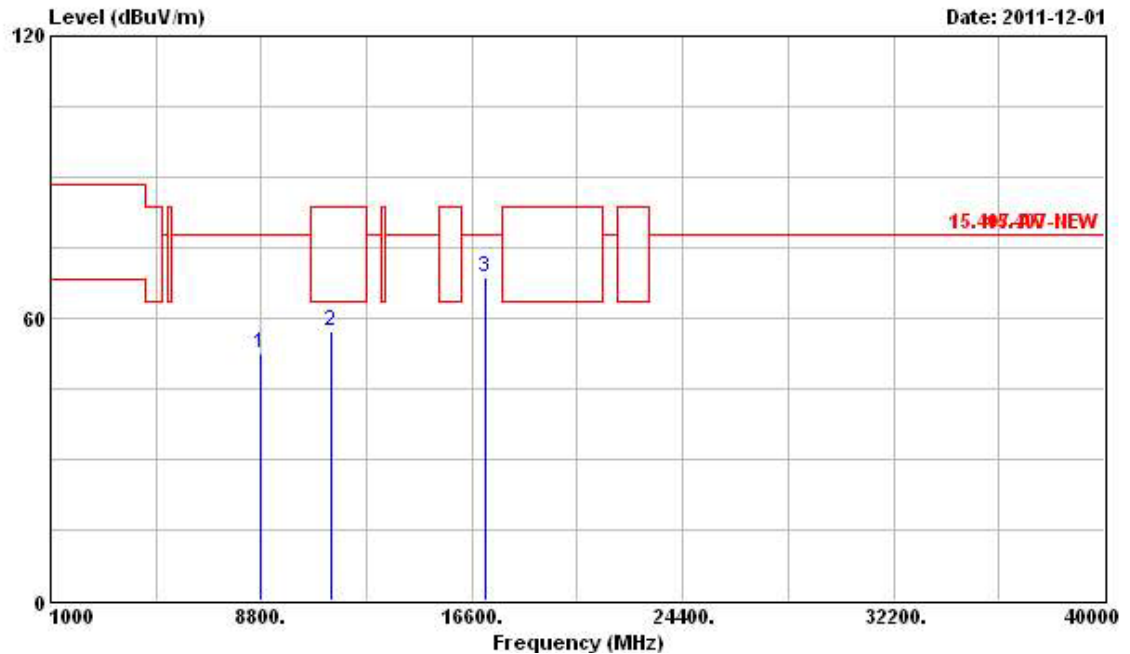


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8550.000	53.66	-24.18	77.84	44.48	38.46	5.97	35.25	Peak	---	---
2	11160.000	59.66	-3.88	63.54	46.92	40.46	7.00	34.72	PK	---	---
3	16740.000	66.51	-11.33	77.84	48.95	43.60	8.47	34.51	Peak	---	---

Final Test Date	Dec. 01, 2011	Test Site No.	03CH02-HY
Temperature	22.3°C	Humidity	62%
Test Engineer	Daniel	Configuration	802.11n Ch. 140 (20 MHz)

Horizontal

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8785.000	52.45	-25.39	77.84	43.38	38.27	6.08	35.28	Peak	---	---
2	11400.000	57.24	-6.30	63.54	44.69	40.56	6.71	34.72	PK	---	---
3	17100.000	68.64	-9.20	77.84	50.37	43.64	8.61	33.98	Peak	---	---


Vertical

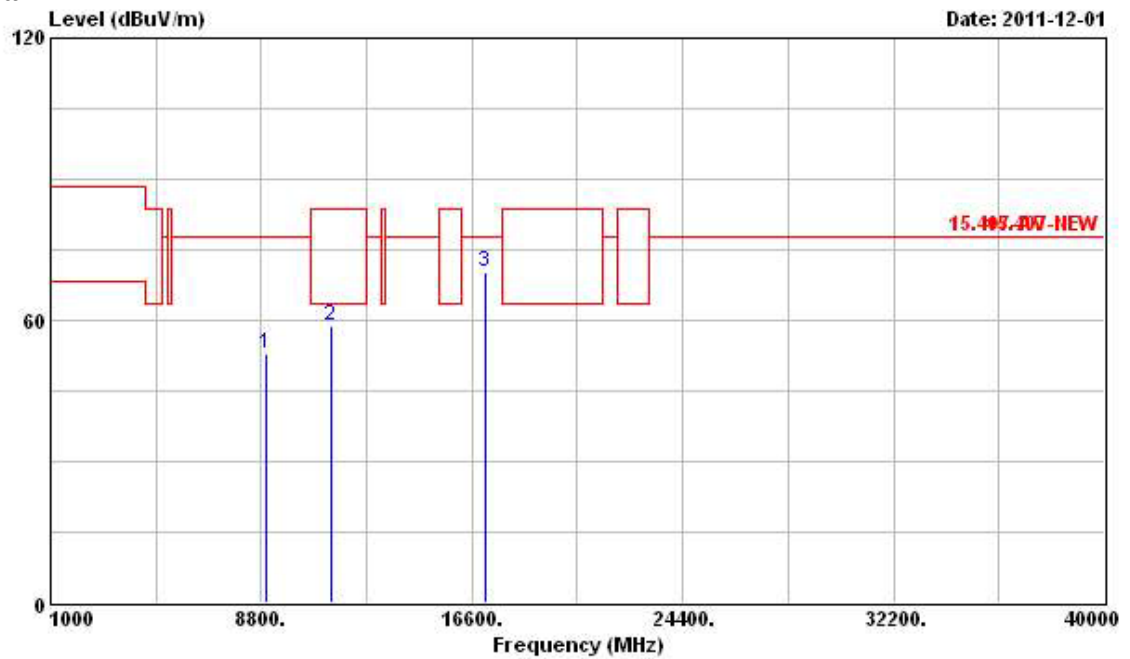

8950.000


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8950.000	52.78	-25.06	77.84	43.81	38.14	6.14	35.31	Peak	---	---
2	11400.000	58.91	-4.63	63.54	46.36	40.56	6.71	34.72	PK	---	---
3	17100.000	70.45	-7.39	77.84	52.18	43.64	8.61	33.98	Peak	---	---

Final Test Date	Dec. 02, 2011	Test Site No.	03CH02-HY
Temperature	22.3°C	Humidity	62%
Test Engineer	Daniel	Configuration	802.11n Ch. 38 (40MHz)

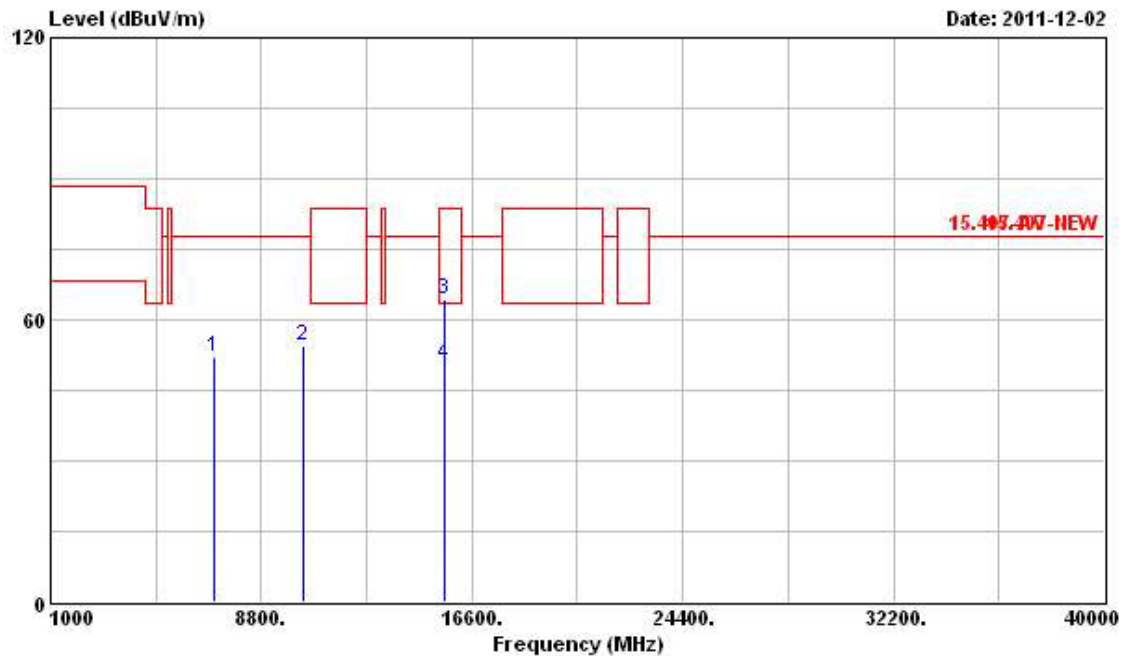Horizontal

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7054.000	52.30	-25.54	77.84	43.92	37.81	5.60	35.03	Peak	---	---
2	10380.000	54.64	-23.20	77.84	43.06	40.03	6.75	35.20	Peak	---	---
3	15570.000	64.16	-19.38	83.54	47.95	42.81	8.45	35.05	Peak	---	---
4	15570.000	50.56	-12.98	63.54	34.35	42.81	8.45	35.05	Average	---	---


Vertical

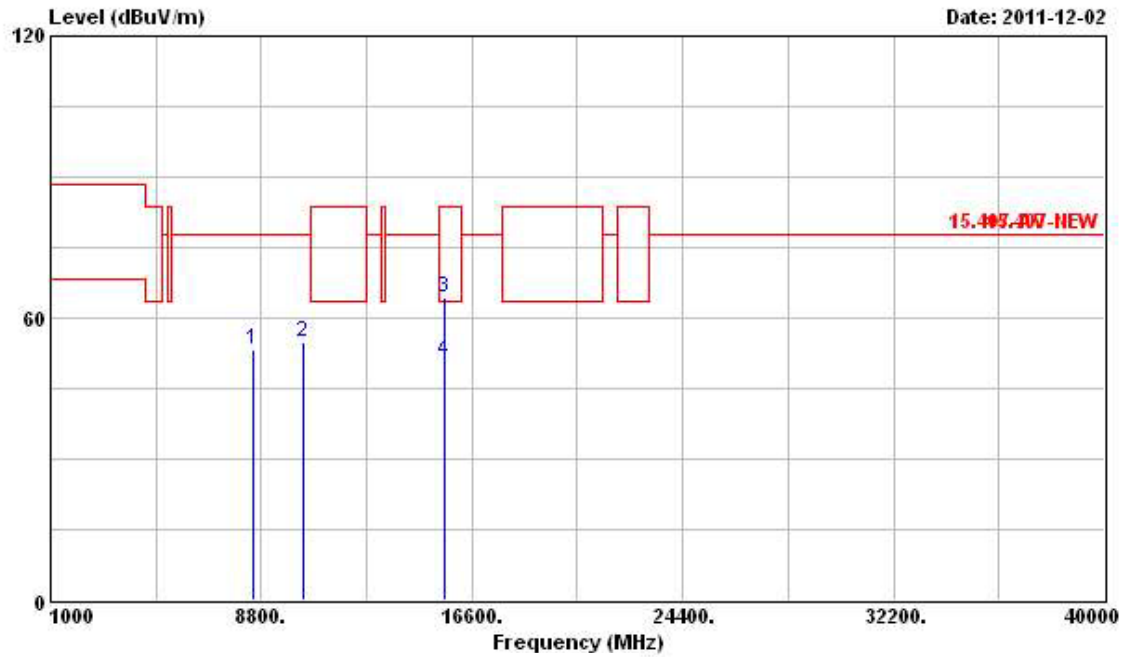

NO. DATE TIME


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8530.000	53.23	-24.61	77.84	44.04	38.47	5.96	35.24	Peak	---	---
2	10380.000	54.96	-22.88	77.84	43.38	40.03	6.75	35.20	Peak	---	---
3	15570.000	64.30	-19.24	83.54	48.09	42.81	8.45	35.05	Peak	---	---
4	15570.000	50.95	-12.59	63.54	34.74	42.81	8.45	35.05	Average	---	---

Final Test Date	Dec. 02, 2011	Test Site No.	03CH02-HY
Temperature	22.3°C	Humidity	62%
Test Engineer	Daniel	Configuration	802.11n Ch. 46 (40MHz)

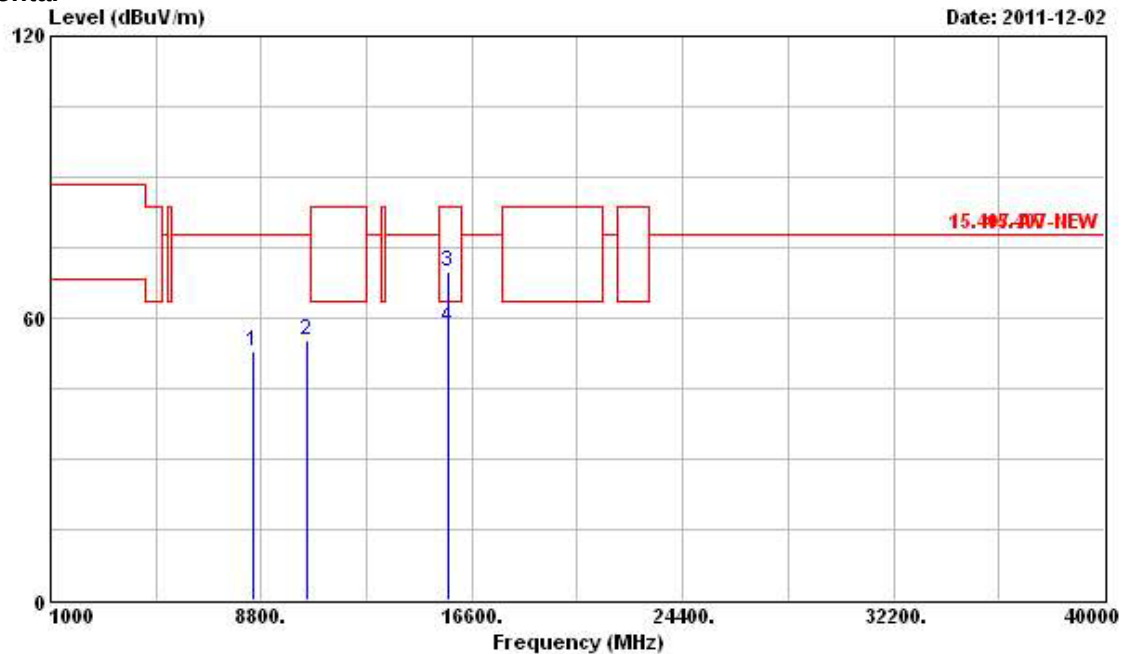Horizontal

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8530.000	53.05	-24.79	77.84	43.86	38.47	5.96	35.24	Peak	---	---
2	10460.000	55.38	-22.46	77.84	43.63	40.07	6.82	35.14	Peak	---	---
3	15690.000	69.99	-13.55	83.54	53.87	42.84	8.46	35.18	Peak	---	---
4	15690.000	58.05	-5.49	63.54	41.93	42.84	8.46	35.18	Average	---	---


Vertical

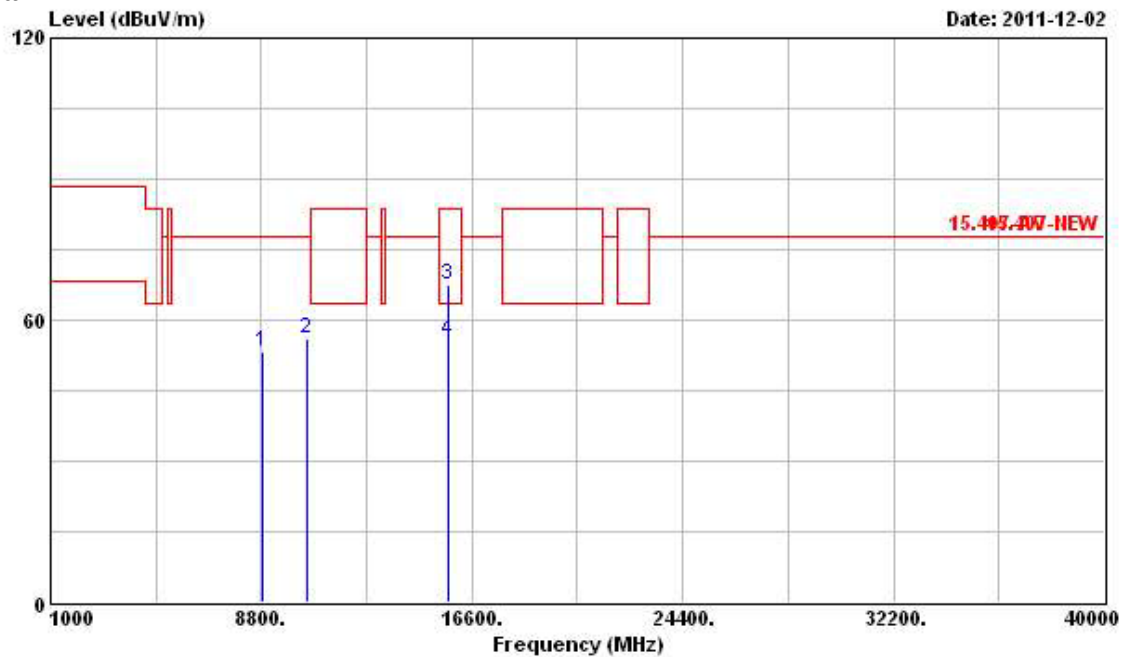

RECEIVED


	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Remark	Pos	Pos
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	8818.000	53.24	-24.60	77.84	44.20	38.25	6.08	35.29 Peak	---	---
2	10460.000	55.97	-21.87	77.84	44.22	40.07	6.82	35.14 Peak	---	---
3	15690.000	67.69	-15.85	83.54	51.57	42.84	8.46	35.18 Peak	---	---
4	15690.000	55.83	-7.71	63.54	39.71	42.84	8.46	35.18 Average	---	---

Final Test Date	Dec. 02, 2011	Test Site No.	03CH02-HY
Temperature	22.3°C	Humidity	62%
Test Engineer	Daniel	Configuration	802.11n Ch. 54 (40MHz)

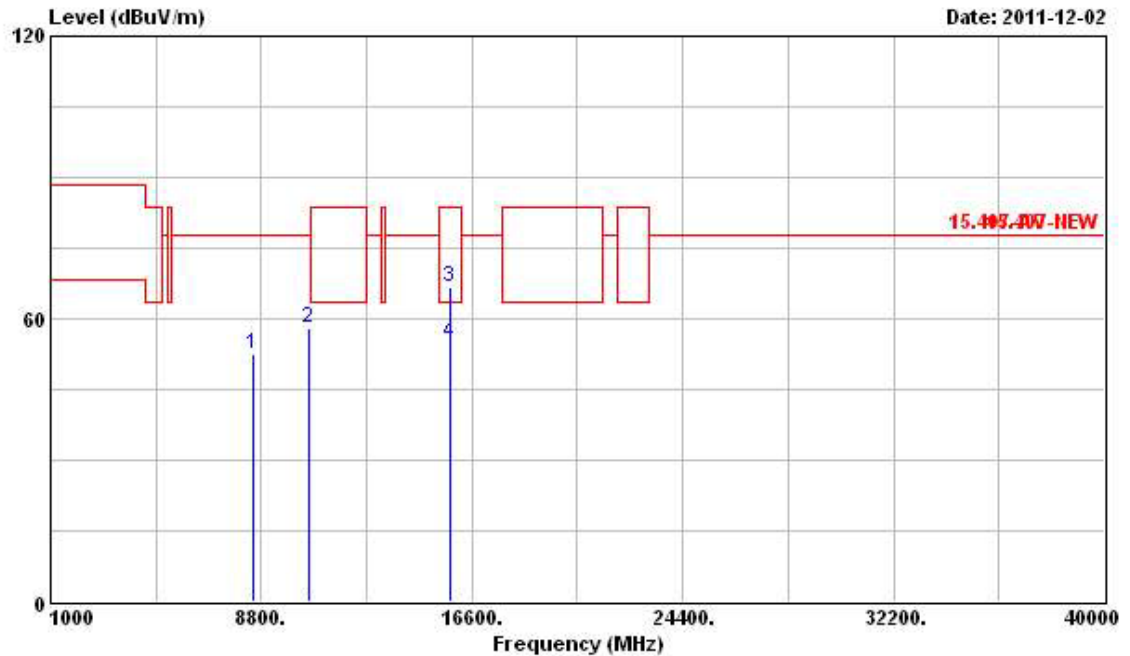Horizontal

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8503.000	52.44	-25.40	77.84	43.24	38.50	5.94	35.24	Peak	---	---
2	10540.000	58.14	-19.70	77.84	46.22	40.12	6.88	35.08	Peak	---	---
3	15810.000	66.55	-16.99	83.54	50.53	42.86	8.46	35.30	Peak	---	---
4	15810.000	54.95	-8.59	63.54	38.93	42.86	8.46	35.30	Average	---	---


Vertical

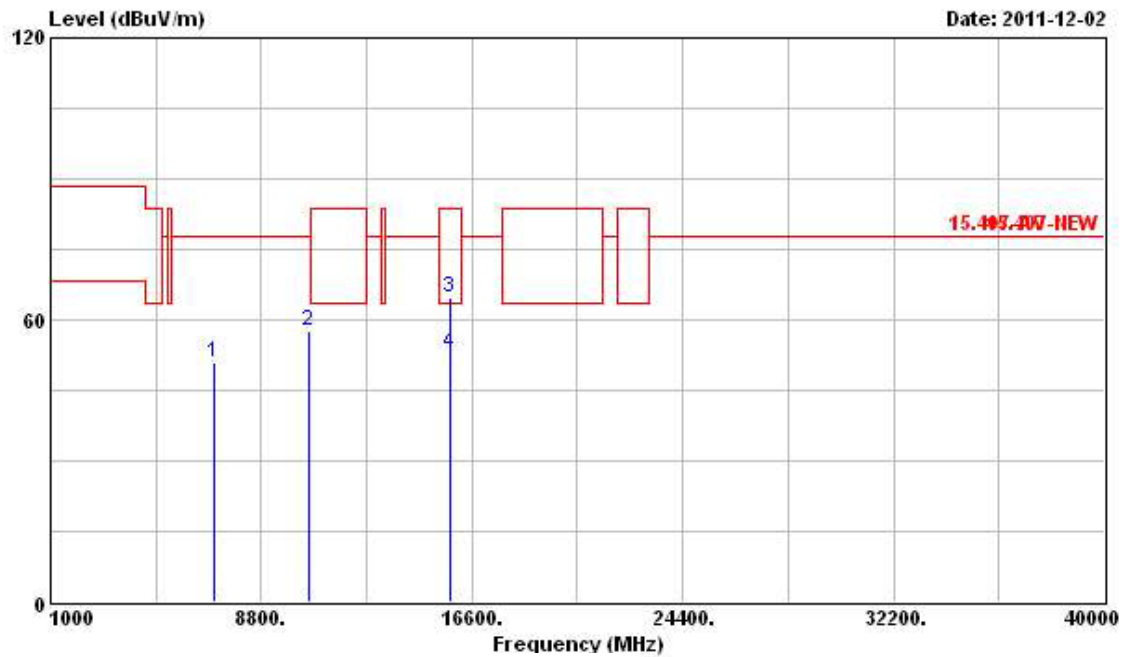

803015A-01 20


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7063.000	50.91	-26.93	77.84	42.54	37.81	5.60	35.04	Peak	---	---
2	10540.000	57.54	-20.30	77.84	45.62	40.12	6.88	35.08	Peak	---	---
3	15810.000	64.59	-18.95	83.54	48.57	42.86	8.46	35.30	Peak	---	---
4	15810.000	52.82	-10.72	63.54	36.80	42.86	8.46	35.30	Average	---	---

Final Test Date	Dec. 02, 2011	Test Site No.	03CH02-HY
Temperature	22.3°C	Humidity	62%
Test Engineer	Daniel	Configuration	802.11n Ch. 62 (40MHz)

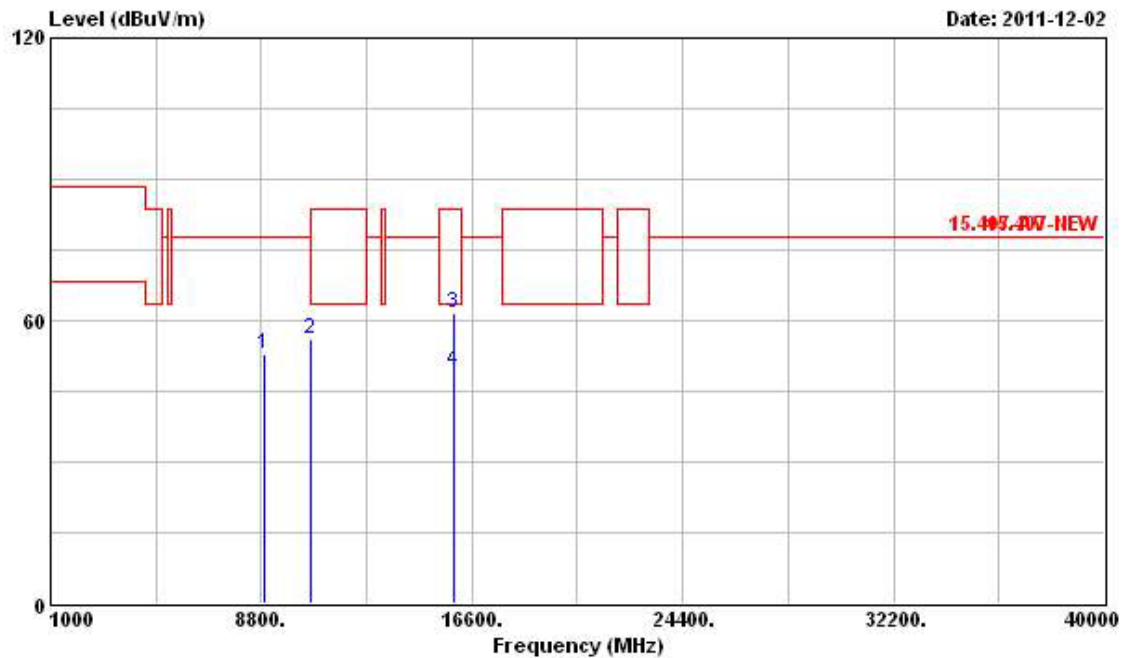Horizontal

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8890.000	53.05	-24.79	77.84	44.05	38.19	6.11	35.30	Peak	---	---
2	10620.000	56.05	-7.49	63.54	43.97	40.17	6.93	35.02	PK	---	---
3	15930.000	61.73	-21.81	83.54	45.77	42.89	8.47	35.40	Peak	---	---
4	15930.000	49.47	-14.07	63.54	33.51	42.89	8.47	35.40	Average	---	---


Vertical

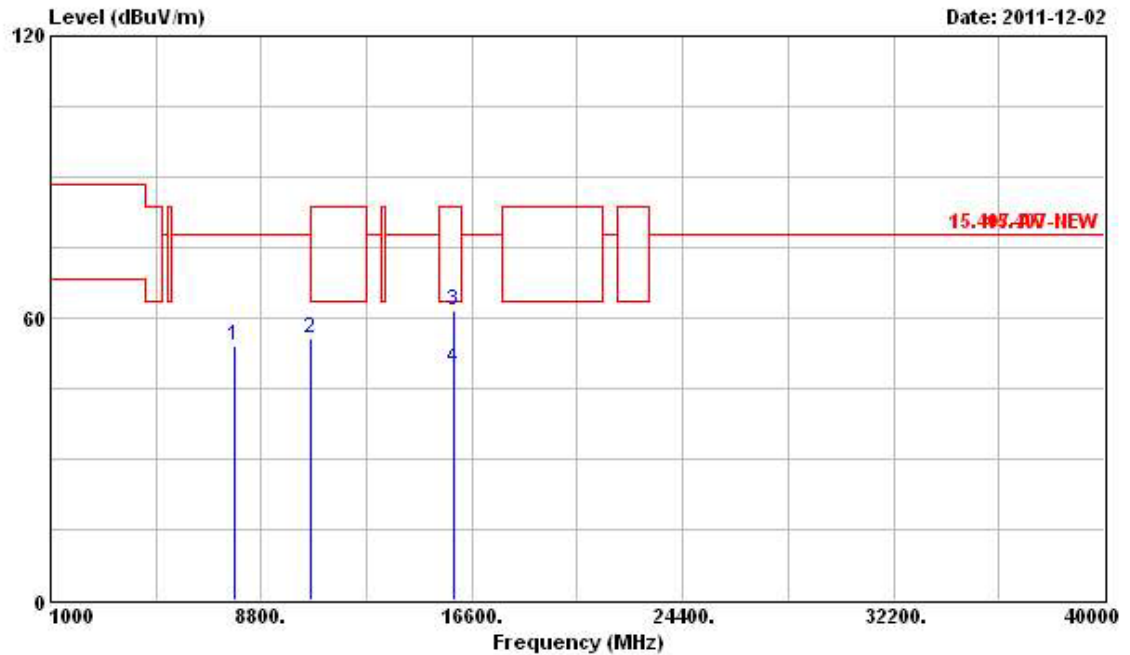

REMARKS


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7783.000	54.01	-23.83	77.84	45.42	38.07	5.74	35.22	Peak	---	---
2	10620.000	55.79	-7.75	63.54	43.71	40.17	6.93	35.02	PK	---	---
3	15930.000	61.59	-21.95	83.54	45.63	42.89	8.47	35.40	Peak	---	---
4	15930.000	49.21	-14.33	63.54	33.25	42.89	8.47	35.40	Average	---	---

Final Test Date	Dec. 02, 2011	Test Site No.	03CH02-HY
Temperature	22.3°C	Humidity	62%
Test Engineer	Daniel	Configuration	802.11n Ch. 102 (40MHz)

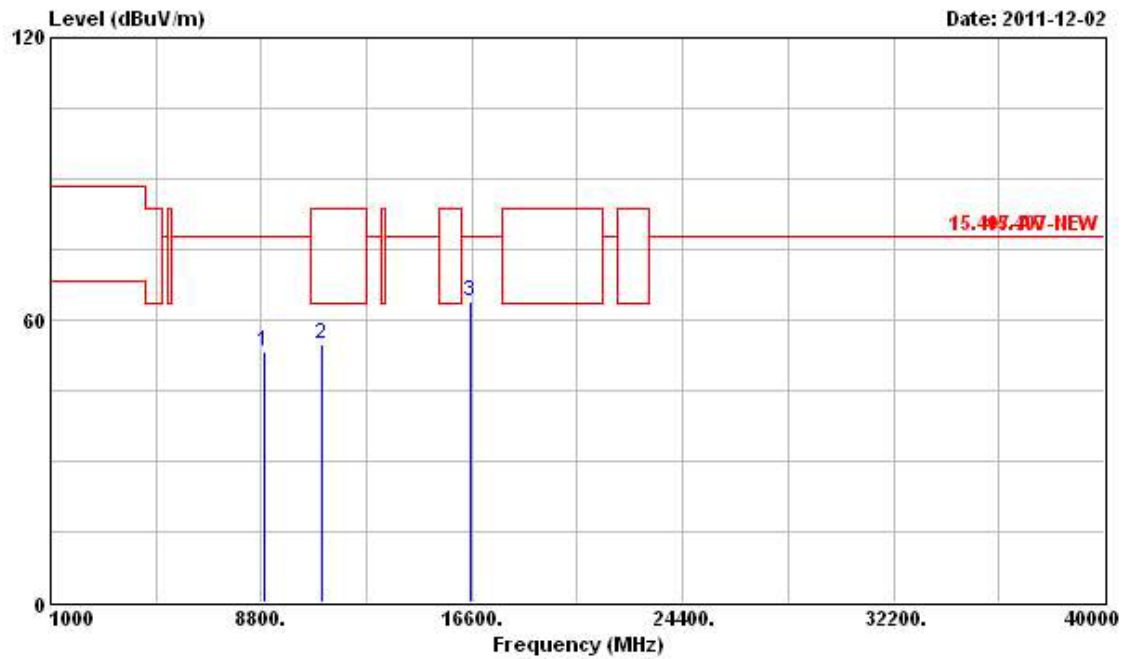Horizontal

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8879.500	53.31	-24.53	77.84	44.31	38.19	6.11	35.30	Peak	---	---
2	11020.000	55.01	-8.53	63.54	42.19	40.41	7.13	34.72	PK	---	---
3	16530.000	63.98	-13.86	77.84	47.14	43.51	8.27	34.94	Peak	---	---


Vertical

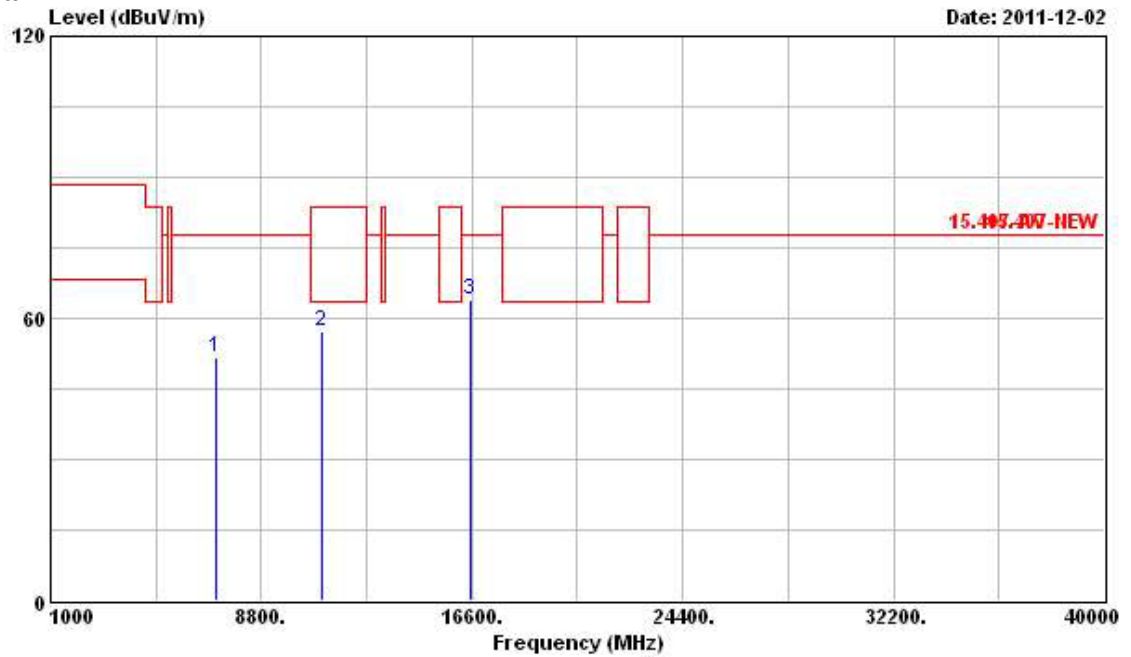

REMARK


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7115.500	51.75	-26.09	77.84	43.37	37.82	5.61	35.05	Peak	---	---
2	11020.000	57.23	-6.31	63.54	44.41	40.41	7.13	34.72	PK	---	---
3	16530.000	64.09	-13.75	77.84	47.25	43.51	8.27	34.94	Peak	---	---

Final Test Date	Dec. 02, 2011	Test Site No.	03CH02-HY
Temperature	22.3°C	Humidity	62%
Test Engineer	Daniel	Configuration	802.11n Ch. 110 (40MHz)

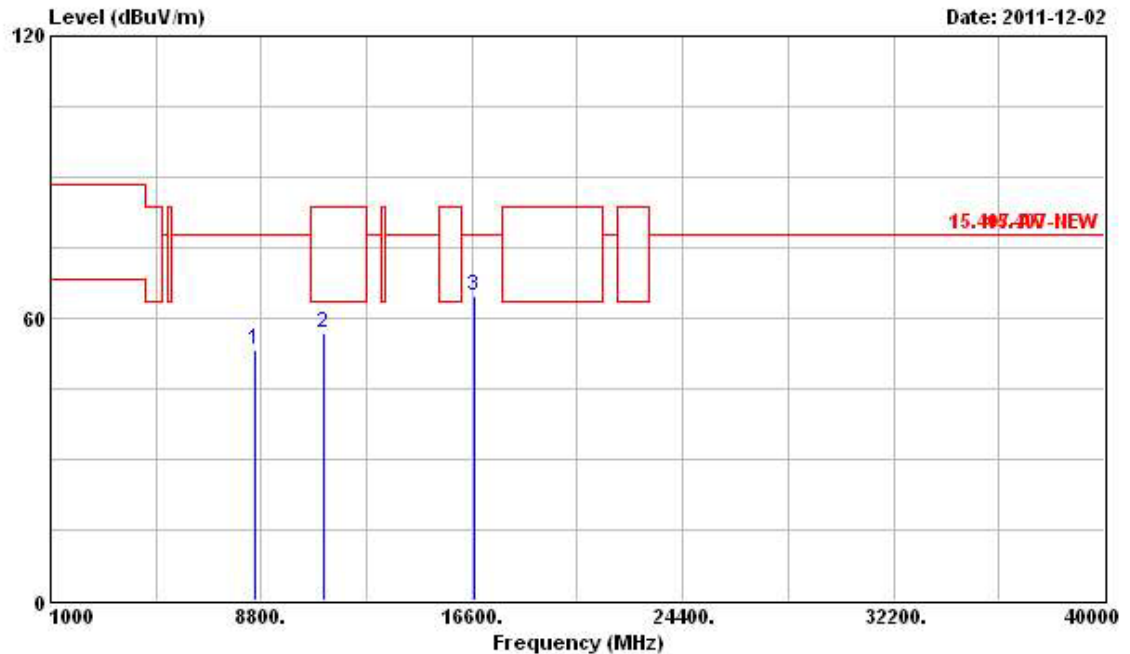Horizontal

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8543.500	53.24	-24.60	77.84	44.07	38.46	5.96	35.25	Peak	---	---
2	11100.000	56.95	-6.59	63.54	44.18	40.44	7.05	34.72	PK	---	---
3	16650.000	64.58	-13.26	77.84	47.32	43.56	8.37	34.67	Peak	---	---


Vertical

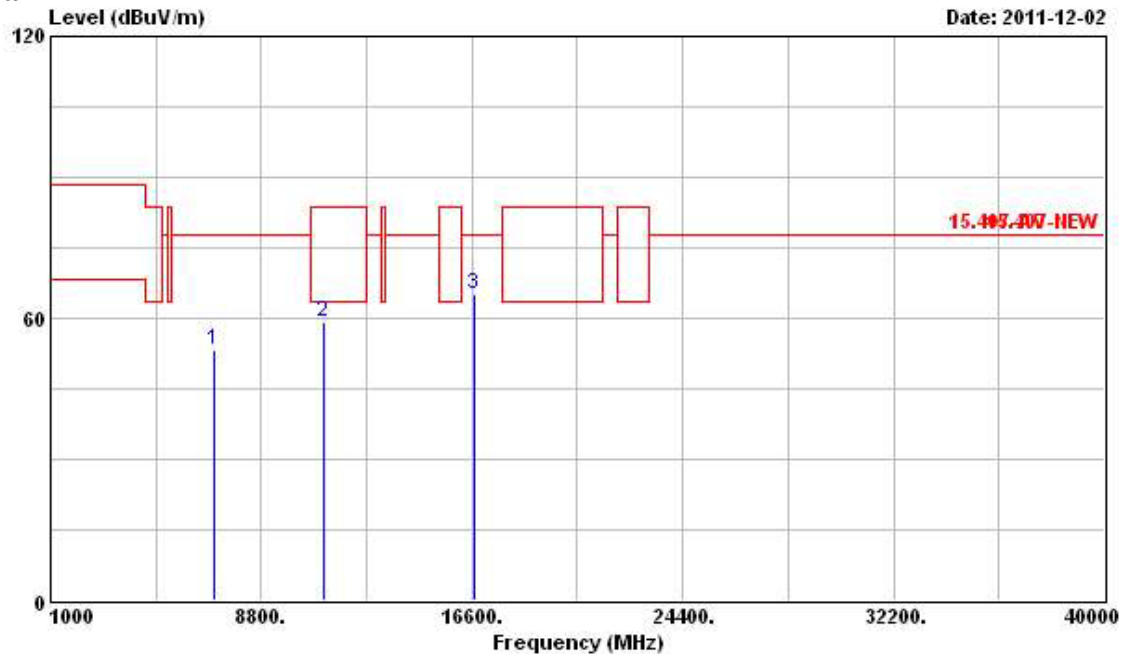

MEASUREMENT


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	7063.000	53.35	-24.49	77.84	44.98	37.81	5.60	35.04 Peak	---	---
2	11100.000	59.12	-4.42	63.54	46.35	40.44	7.05	34.72 PK	---	---
3	16650.000	65.09	-12.75	77.84	47.83	43.56	8.37	34.67 Peak	---	---

Final Test Date	Dec. 02, 2011	Test Site No.	03CH02-HY
Temperature	22.3°C	Humidity	62%
Test Engineer	Daniel	Configuration	802.11n Ch. 134 (40MHz)

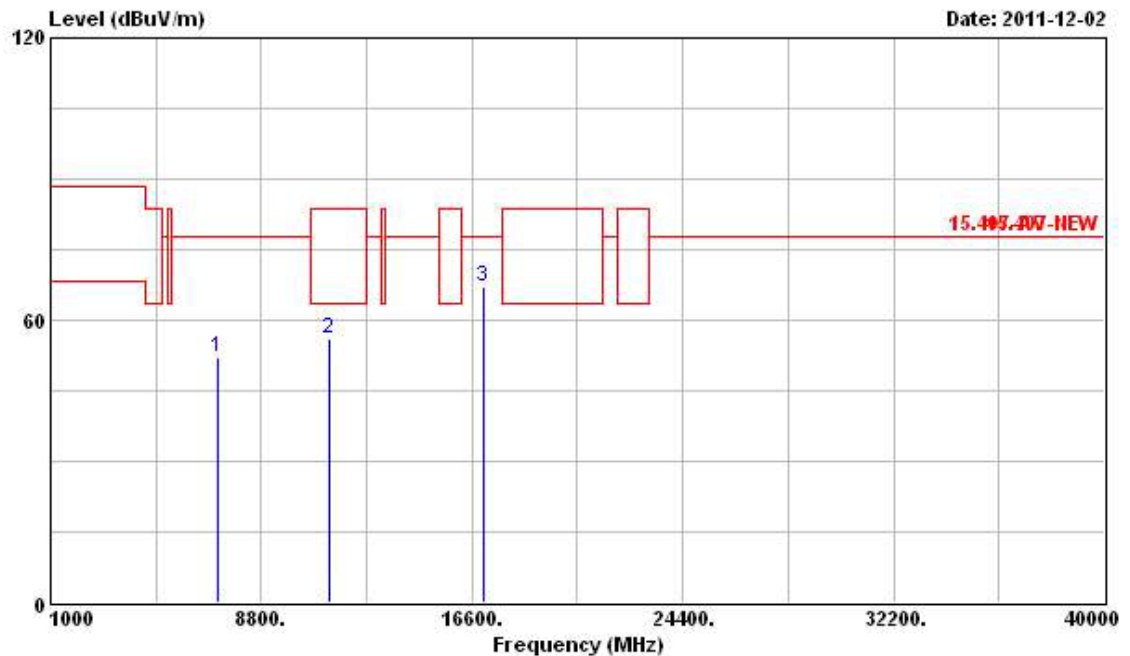Horizontal

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7199.500	52.11	-25.73	77.84	43.72	37.84	5.62	35.07	Peak	---	---
2	11340.000	56.06	-7.48	63.54	43.45	40.53	6.80	34.72	PK	---	---
3	17010.000	66.94	-10.90	77.84	48.58	43.69	8.65	33.98	Peak	---	---

Vertical

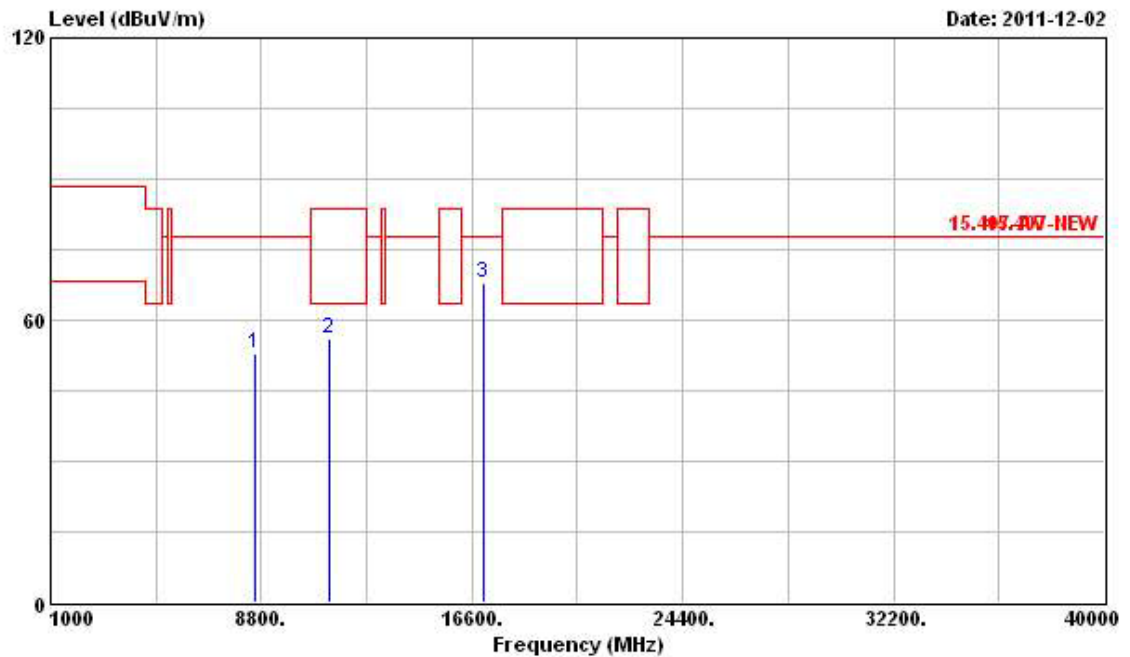


85.2015.20

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8585.500	52.73	-25.11	77.84	43.58	38.43	5.97	35.25	Peak	---	---
2	11340.000	56.15	-7.39	63.54	43.54	40.53	6.80	34.72	PK	---	---
3	17010.000	68.09	-9.75	77.84	49.73	43.69	8.65	33.98	Peak	---	---

For Two Chains:


Final Test Date	Dec. 02, 2011	Test Site No.	03CH02-HY
Temperature	22.3°C	Humidity	62%
Test Engineer	Daniel	Configuration	802.11n Ch. 36 (20MHz)

Horizontal

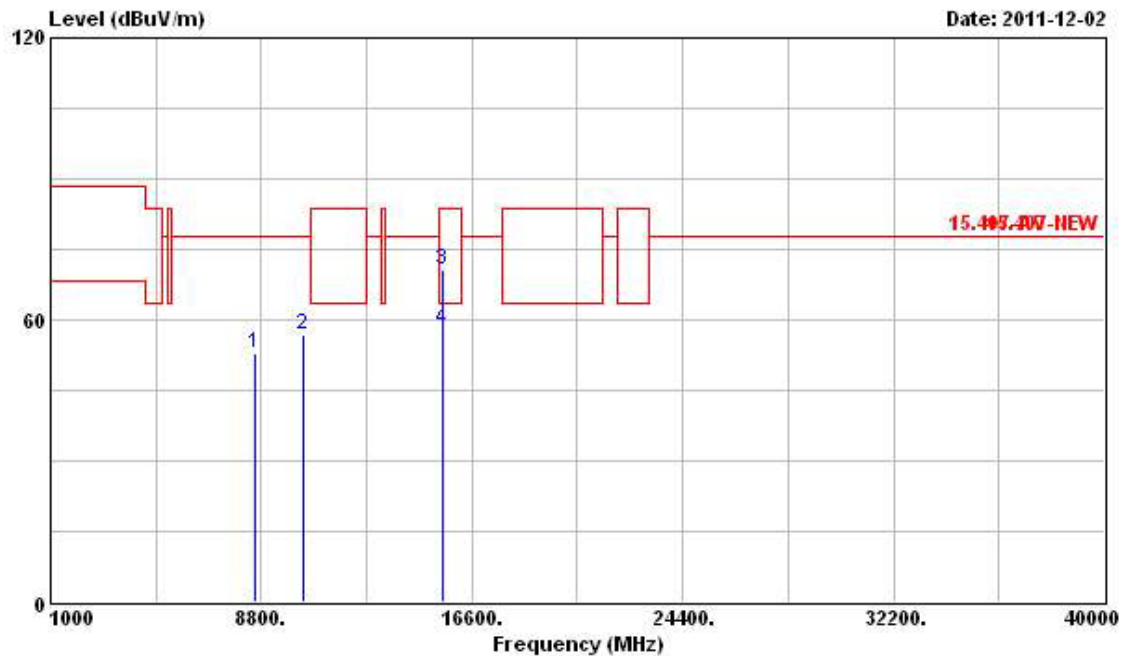

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8539.000	52.89	-24.95	77.84	43.71	38.47	5.96	35.25	Peak	---	---
2	10360.000	57.02	-20.82	77.84	45.51	40.02	6.71	35.22	Peak	---	---
3	15540.000	70.47	-13.07	83.54	54.24	42.81	8.45	35.03	Peak	---	---
4	15540.000	57.84	-5.70	63.54	41.61	42.81	8.45	35.03	Average	---	---


Vertical

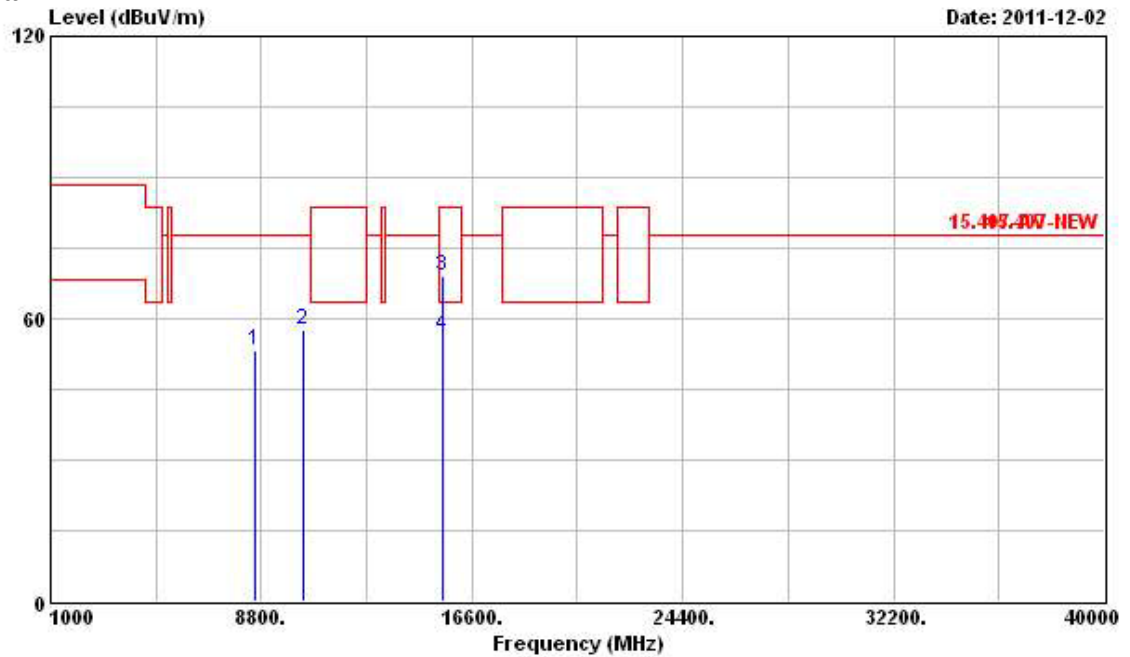

REMARKS

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8575.000	53.29	-24.55	77.84	44.14	38.43	5.97	35.25	Peak	---	---
2	10360.000	57.48	-20.36	77.84	45.97	40.02	6.71	35.22	Peak	---	---
3	15540.000	68.96	-14.58	83.54	52.73	42.81	8.45	35.03	Peak	---	---
4	15540.000	56.53	-7.01	63.54	40.30	42.81	8.45	35.03	Average	---	---


Final Test Date	Dec. 02, 2011	Test Site No.	03CH02-HY
Temperature	22.3°C	Humidity	62%
Test Engineer	Daniel	Configuration	802.11n Ch. 40 (20 MHz)

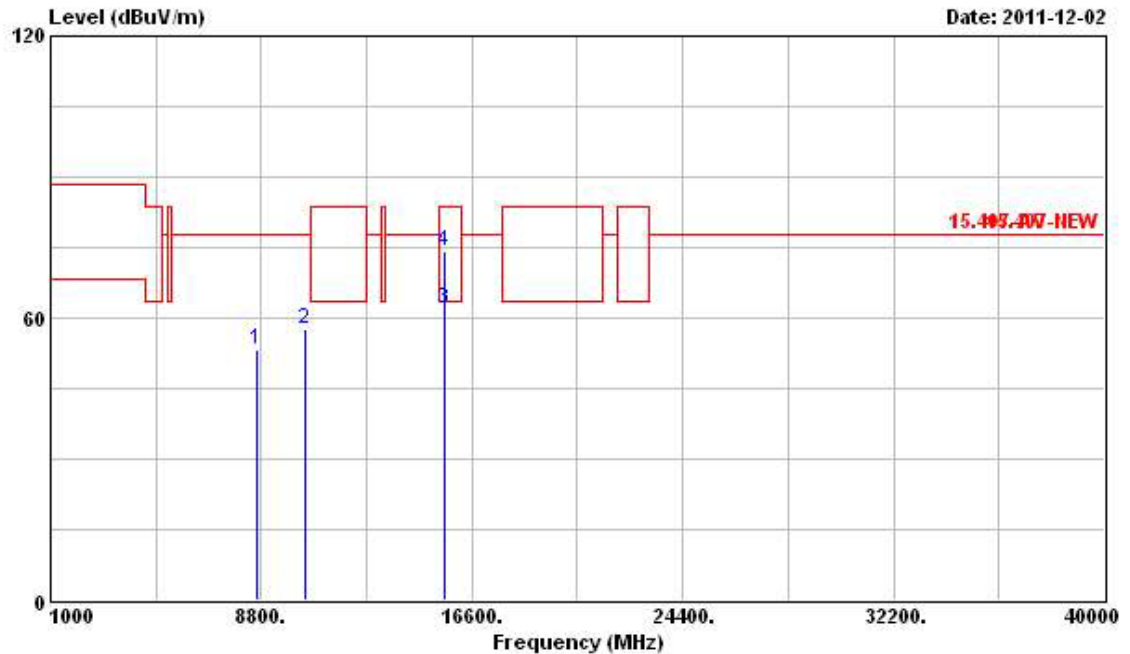Horizontal

802.11n Ch. 40

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8602.000	53.10	-24.74	77.84	43.95	38.42	5.99	35.26	Peak	---	---
2	10400.000	57.63	-20.21	77.84	46.02	40.04	6.75	35.18	Peak	---	---
3	15600.000	61.93	-1.61	63.54	45.76	42.82	8.45	35.10	Average	---	---
4	15600.000	74.08	-9.46	83.54	57.91	42.82	8.45	35.10	Peak	---	---


Vertical

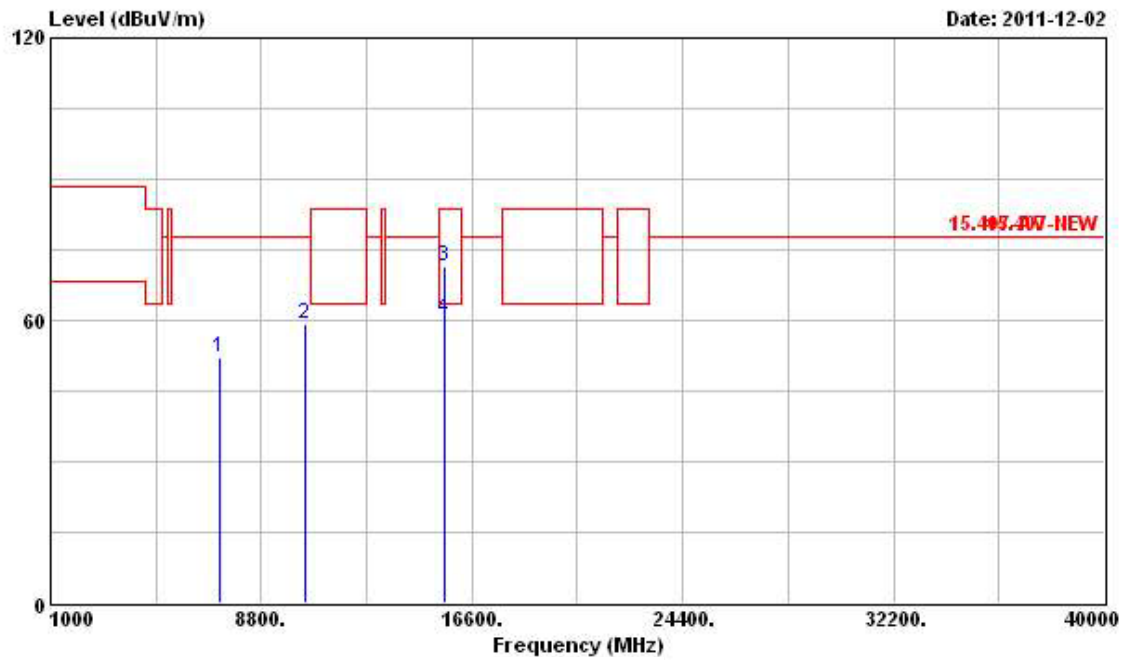

RECEIVED


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	7243.000	52.30	-25.54	77.84	43.90	37.85	5.63	35.08	Peak	---
2	10400.000	59.35	-18.49	77.84	47.74	40.04	6.75	35.18	Peak	---
3	15600.000	71.55	-11.99	83.54	55.38	42.82	8.45	35.10	Peak	---
4	15600.000	60.45	-3.09	63.54	44.28	42.82	8.45	35.10	Average	---

Final Test Date	Dec. 02, 2011	Test Site No.	03CH02-HY
Temperature	22.3°C	Humidity	62%
Test Engineer	Daniel	Configuration	802.11n Ch. 48 (20 MHz)

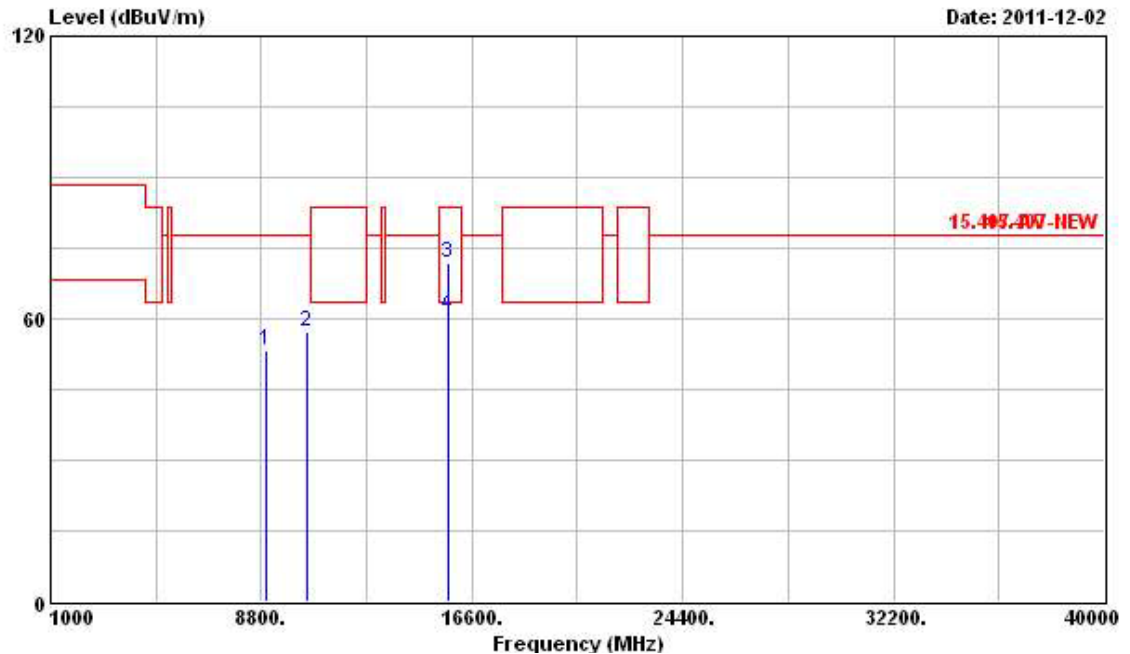Horizontal

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8998.000	53.23	-24.61	77.84	44.28	38.11	6.16	35.32	Peak	---	---
2	10480.000	57.16	-20.68	77.84	45.37	40.09	6.82	35.12	Peak	---	---
3	15720.000	71.98	-11.56	83.54	55.88	42.84	8.46	35.20	Peak	---	---
4	15720.000	60.83	-2.71	63.54	44.73	42.84	8.46	35.20	Average	---	---


Vertical

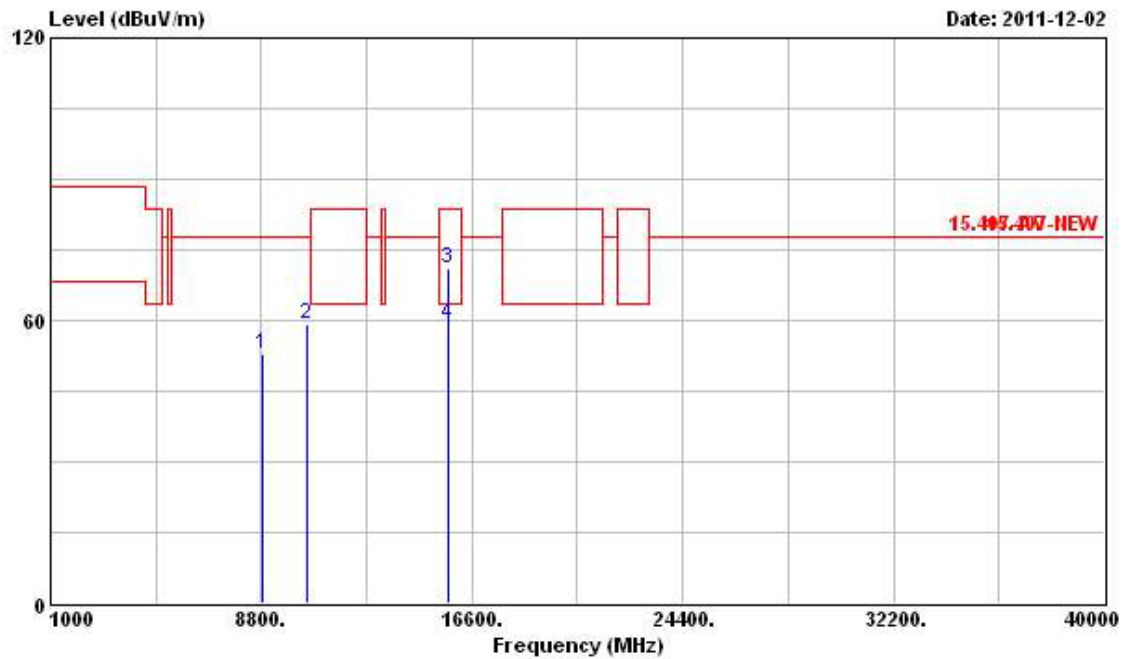

0.000000 0.000000

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8818.000	52.92	-24.92	77.84	43.88	38.25	6.08	35.29	Peak	---	---
2	10480.000	59.20	-18.64	77.84	47.41	40.09	6.82	35.12	Peak	---	---
3	15720.000	71.12	-12.42	83.54	55.02	42.84	8.46	35.20	Peak	---	---
4	15720.000	59.27	-4.27	63.54	43.17	42.84	8.46	35.20	Average	---	---


Final Test Date	Dec. 02, 2011	Test Site No.	03CH02-HY
Temperature	22.3°C	Humidity	62%
Test Engineer	Daniel	Configuration	802.11n Ch. 52 (20MHz)

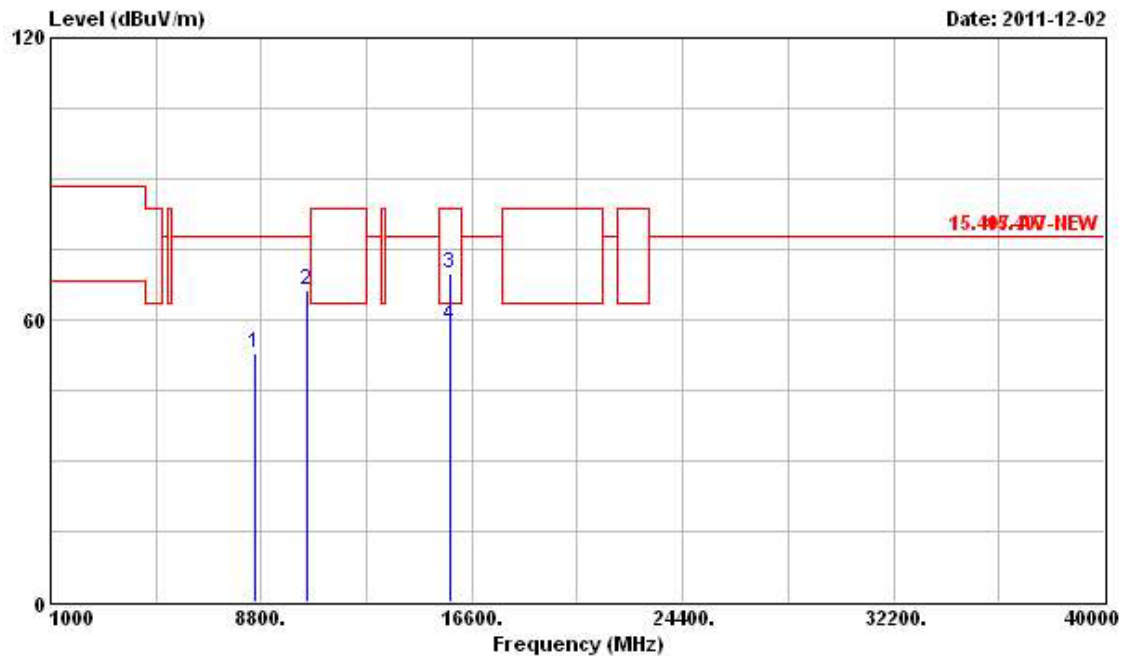Horizontal

802.11a/b/g

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8566.000	52.70	-25.14	77.84	43.53	38.45	5.97	35.25	Peak	---	---
2	10520.000	66.19	-11.65	77.84	54.33	40.11	6.85	35.10	Peak	---	---
3	15780.000	69.75	-13.79	83.54	53.71	42.86	8.46	35.28	Peak	---	---
4	15780.000	58.90	-4.64	63.54	42.86	42.86	8.46	35.28	Average	---	---


Vertical

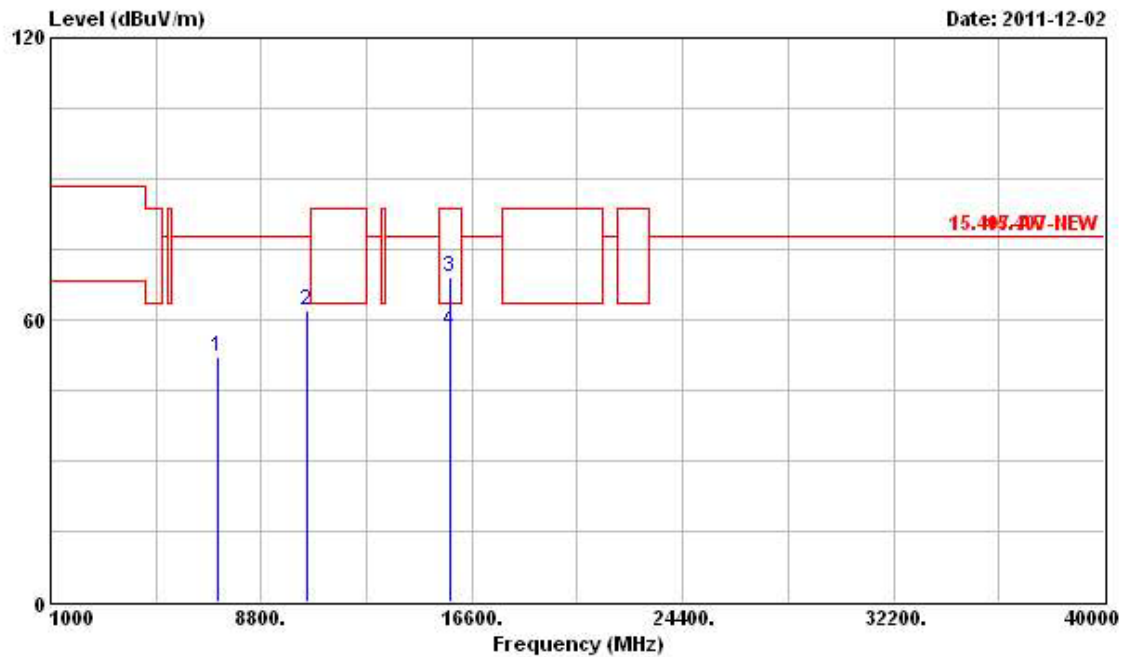

NO.3015A-01 2/11


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7162.000	51.94	-25.90	77.84	43.56	37.83	5.62	35.07	Peak	---	---
2	10520.000	61.82	-16.02	77.84	49.96	40.11	6.85	35.10	Peak	---	---
3	15780.000	69.24	-14.30	83.54	53.20	42.86	8.46	35.28	Peak	---	---
4	15780.000	57.62	-5.92	63.54	41.58	42.86	8.46	35.28	Average	---	---

Final Test Date	Dec. 02, 2011	Test Site No.	03CH02-HY
Temperature	22.3°C	Humidity	62%
Test Engineer	Daniel	Configuration	802.11n Ch. 56 (20 MHz)

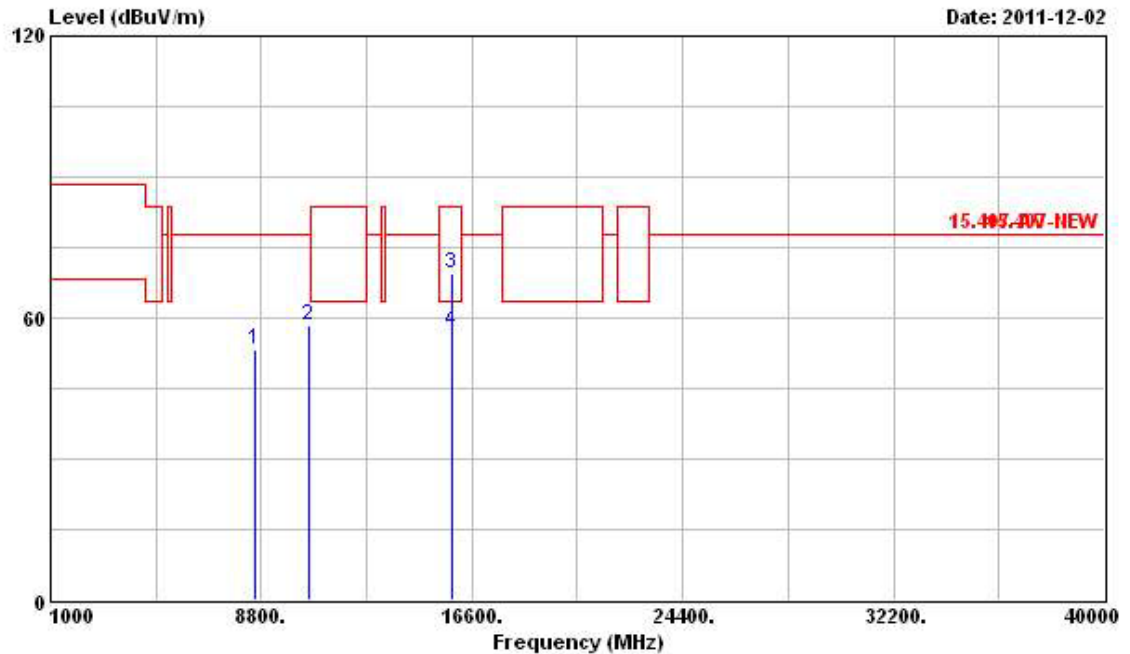Horizontal

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8575.000	53.26	-24.58	77.84	44.11	38.43	5.97	35.25	Peak	---	---
2	10560.000	58.28	-19.56	77.84	46.33	40.13	6.88	35.06	Peak	---	---
3	15840.000	69.65	-13.89	83.54	53.65	42.87	8.46	35.33	Peak	---	---
4	15840.000	57.13	-6.41	63.54	41.13	42.87	8.46	35.33	Average	---	---


Vertical

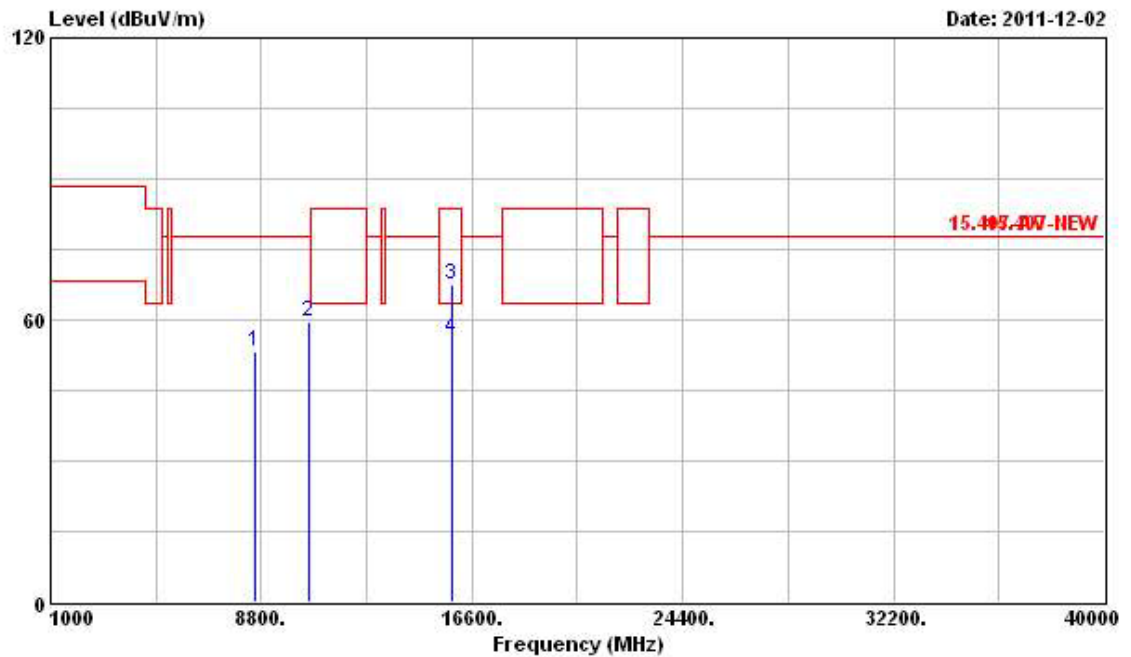

FR160328


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8575.000	53.16	-24.68	77.84	44.01	38.43	5.97	35.25	Peak	---	---
2	10560.000	59.75	-18.09	77.84	47.80	40.13	6.88	35.06	Peak	---	---
3	15840.000	67.53	-16.01	83.54	51.53	42.87	8.46	35.33	Peak	---	---
4	15840.000	56.02	-7.52	63.54	40.02	42.87	8.46	35.33	Average	---	---

Final Test Date	Dec. 02, 2011	Test Site No.	03CH02-HY
Temperature	22.3°C	Humidity	62%
Test Engineer	Daniel	Configuration	802.11n Ch. 64 (20 MHz)

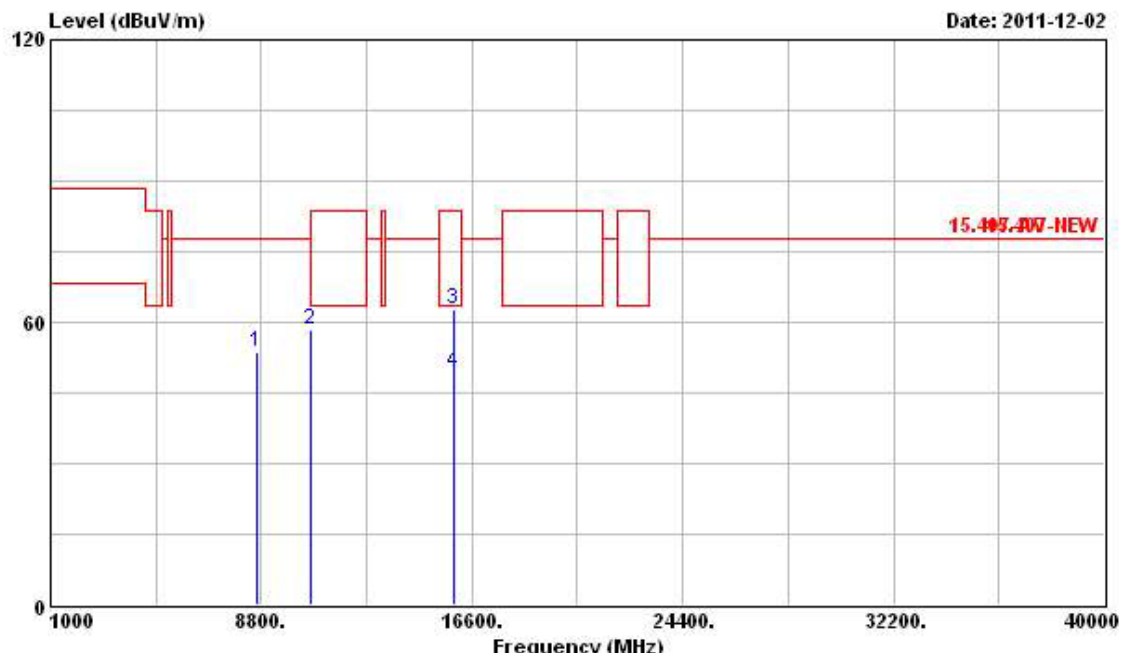Horizontal


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8611.000	53.50	-24.34	77.84	44.36	38.41	5.99	35.26	Peak	---	---
2	10640.000	58.61	-4.93	63.54	46.50	40.18	6.93	35.00	PK	---	---
3	15960.000	62.60	-20.94	83.54	46.69	42.89	8.47	35.45	Peak	---	---
4	15960.000	49.35	-14.19	63.54	33.44	42.89	8.47	35.45	Average	---	---

Vertical

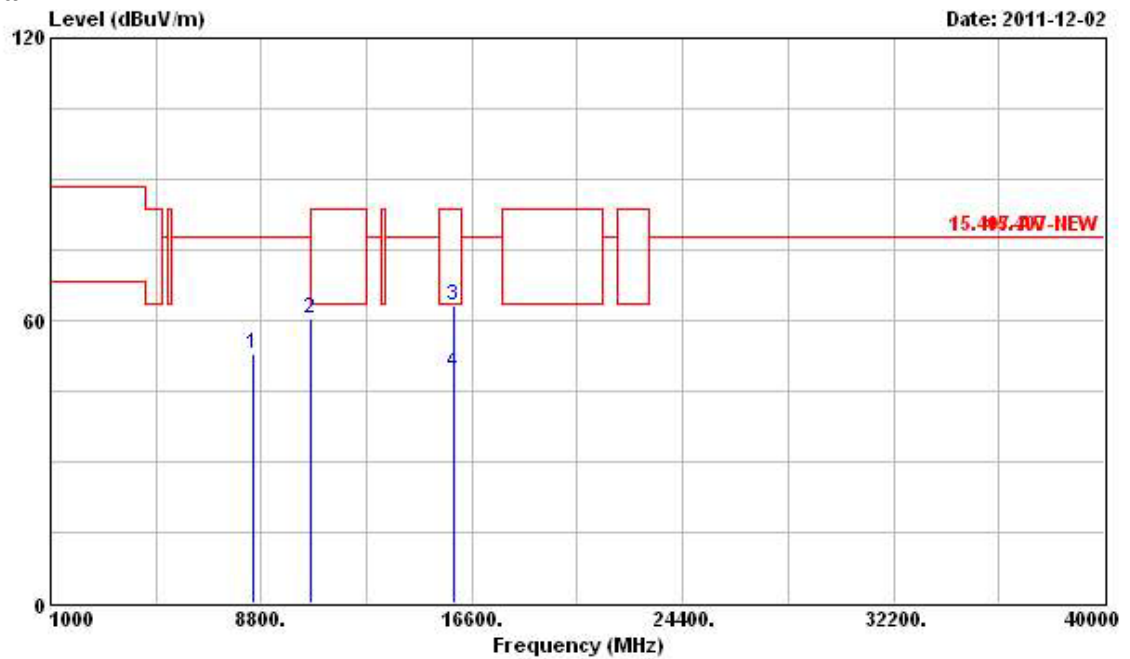


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8530.000	53.00	-24.84	77.84	43.81	38.47	5.96	35.24	Peak	---	---
2	10640.000	60.30	-3.24	63.54	48.19	40.18	6.93	35.00	PK	---	---
3	15960.000	63.05	-20.49	83.54	47.14	42.89	8.47	35.45	Peak	---	---
4	15960.000	49.14	-14.40	63.54	33.23	42.89	8.47	35.45	Average	---	---

Final Test Date	Dec. 02, 2011	Test Site No.	03CH02-HY
Temperature	22.3°C	Humidity	62%
Test Engineer	Daniel	Configuration	802.11n Ch. 100 (20MHz)

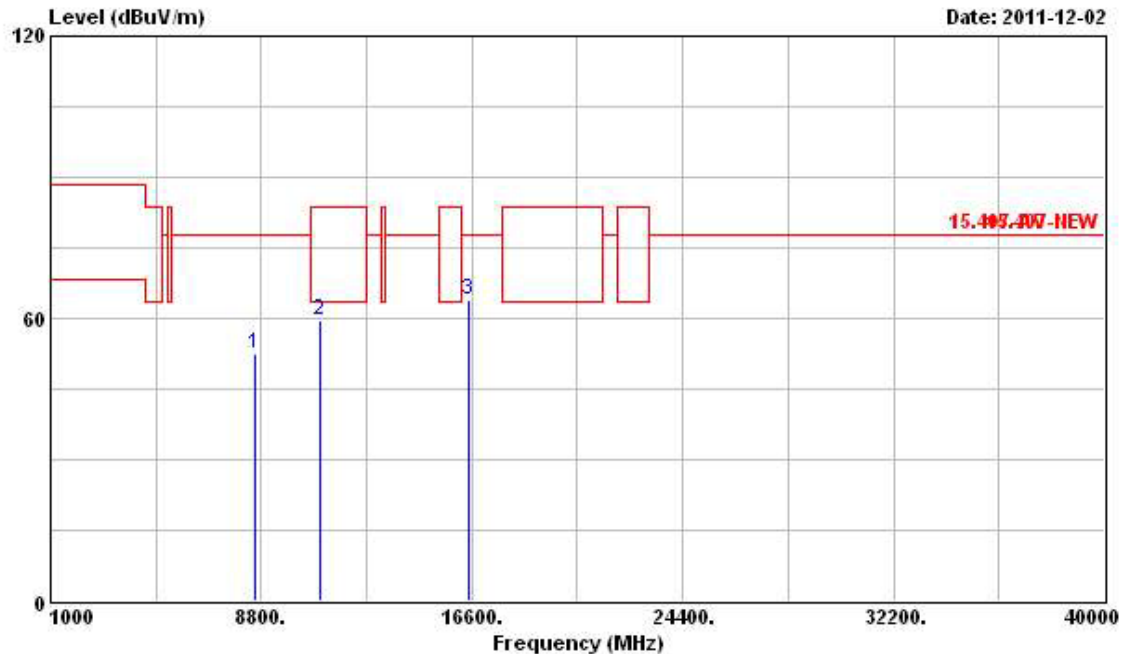Horizontal


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8575.000	52.48	-25.36	77.84	43.33	38.43	5.97	35.25	Peak	---	---
2	11000.000	59.51	-4.03	63.54	46.66	40.40	7.17	34.72	PK	---	---
3	16500.000	64.13	-33.71	97.84	47.38	43.50	8.24	34.99	Peak	---	---

Vertical

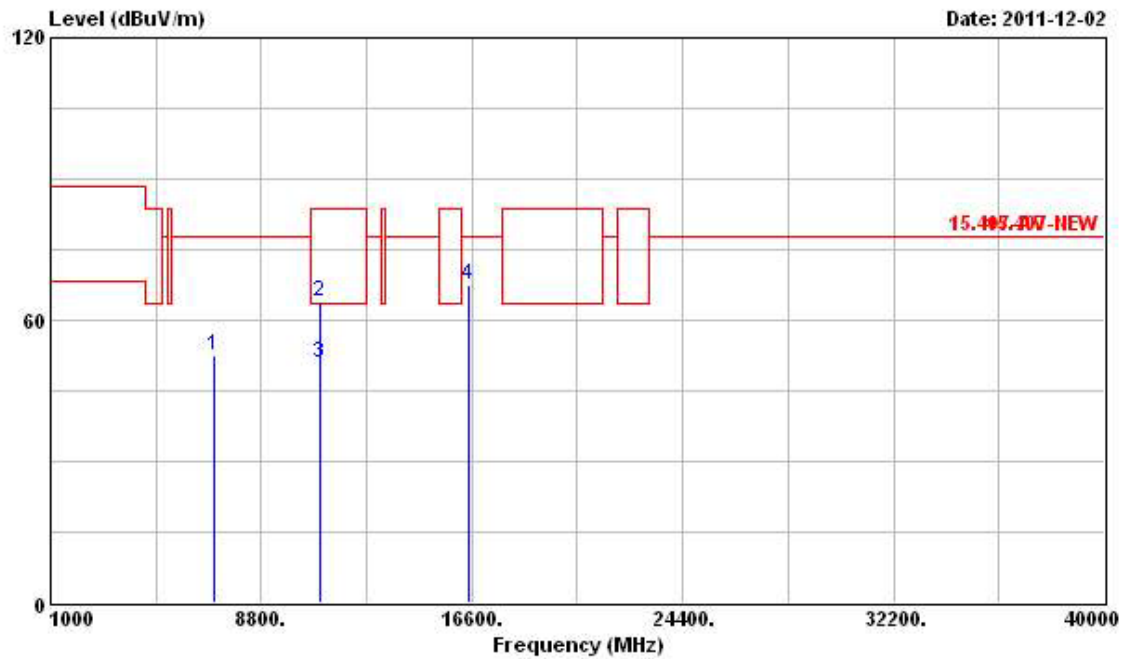


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7031.500	52.44	-25.40	77.84	44.06	37.81	5.60	35.03	Peak	---	---
2	11000.000	63.79	-19.75	83.54	50.94	40.40	7.17	34.72	Peak	---	---
3	11000.000	50.90	-12.64	63.54	38.05	40.40	7.17	34.72	Average	---	---
4	16500.000	67.65	-10.19	77.84	50.90	43.50	8.24	34.99	Peak	---	---

Final Test Date	Dec. 02, 2011	Test Site No.	03CH02-HY
Temperature	22.3°C	Humidity	62%
Test Engineer	Daniel	Configuration	802.11n Ch. 116 (20 MHz)

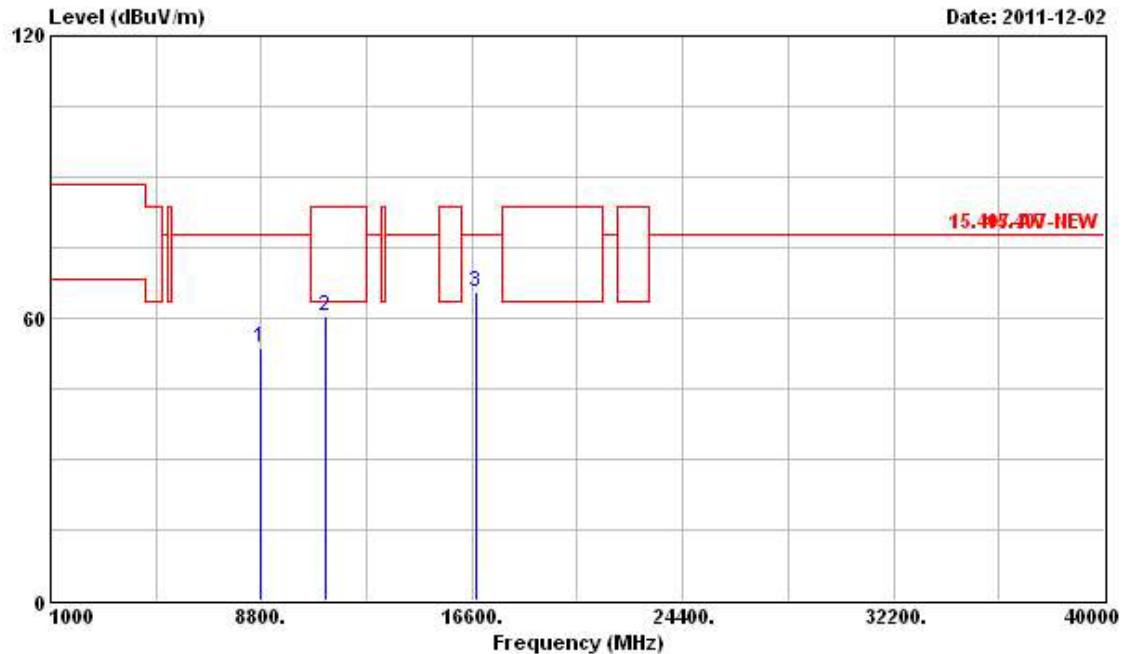Horizontal


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8753.500	53.58	-24.26	77.84	44.50	38.30	6.06	35.28	Peak	---	---
2	11160.000	60.26	-3.28	63.54	47.55	40.47	6.96	34.72	PK	---	---
3	16740.000	65.54	-12.30	77.84	47.98	43.60	8.47	34.51	Peak	---	---

Vertical

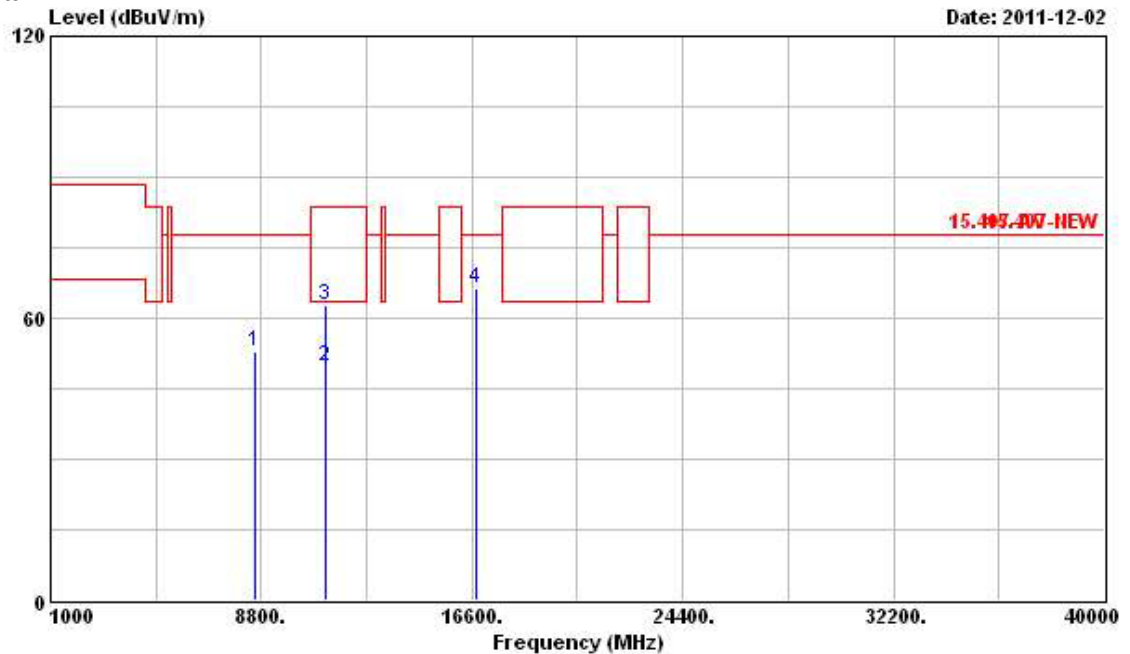


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8543.500	52.73	-25.11	77.84	43.56	38.46	5.96	35.25	Peak	---	---
2	11160.000	49.71	-13.83	63.54	37.00	40.47	6.96	34.72	Average	---	---
3	11160.000	62.59	-20.95	83.54	49.88	40.47	6.96	34.72	Peak	---	---
4	16740.000	66.30	-11.54	77.84	48.74	43.60	8.47	34.51	Peak	---	---

Final Test Date	Dec. 02, 2011	Test Site No.	03CH02-HY
Temperature	22.3°C	Humidity	62%
Test Engineer	Daniel	Configuration	802.11n Ch. 140 (20 MHz)

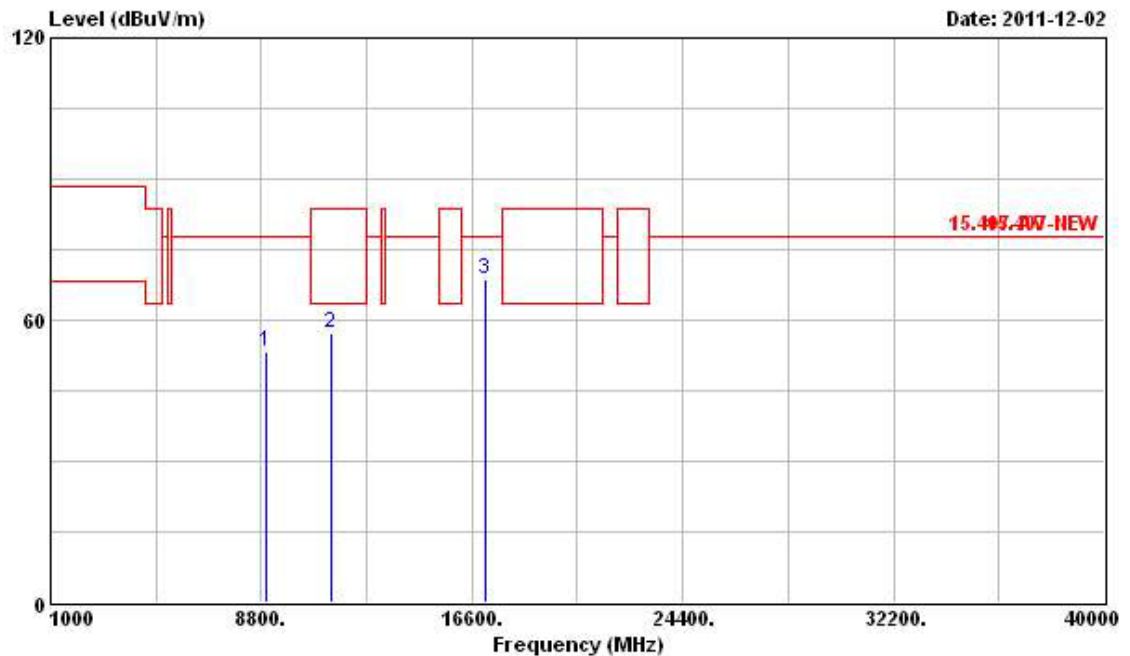Horizontal

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8963.500	53.12	-24.72	77.84	44.15	38.14	6.14	35.31	Peak	---	---
2	11400.000	57.34	-6.20	63.54	44.79	40.56	6.71	34.72	PK	---	---
3	17100.000	68.77	-9.07	77.84	50.50	43.64	8.61	33.98	Peak	---	---

Vertical

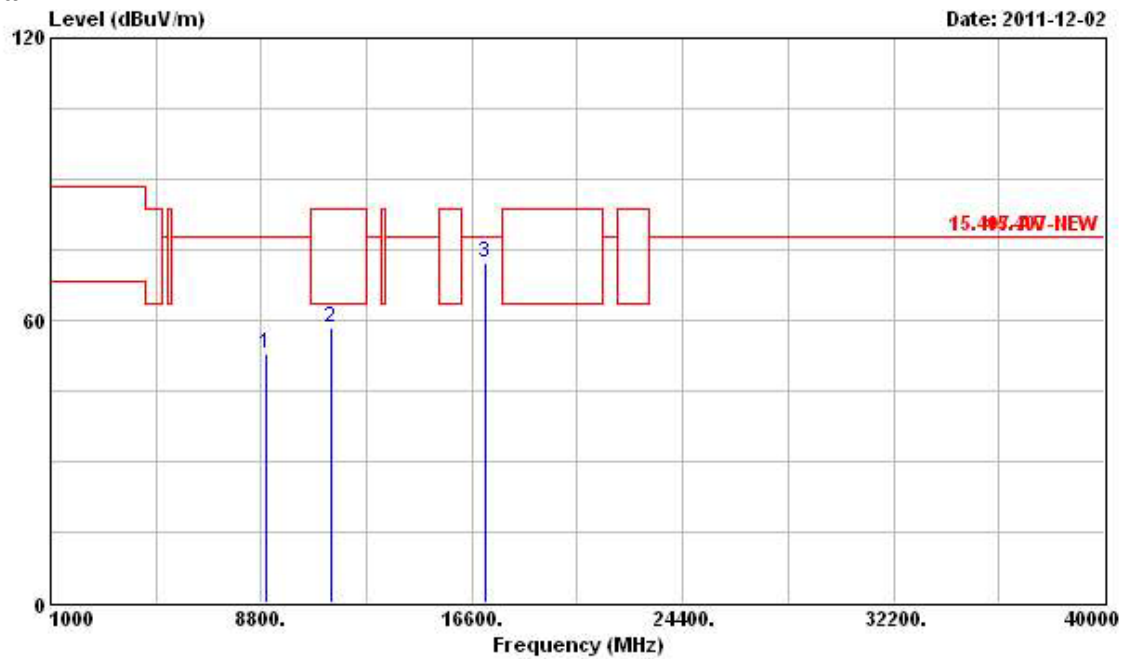

8953.000

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8953.000	52.79	-25.05	77.84	43.82	38.14	6.14	35.31	Peak	---	---
2	11400.000	58.24	-5.30	63.54	45.69	40.56	6.71	34.72	PK	---	---
3	17100.000	72.37	-5.47	77.84	54.10	43.64	8.61	33.98	Peak	---	---