



FCC Test Report

Equipment : DBDC ROUTER
Brand Name : Charter
Model No. : RAC2V1K
FCC ID : H8NRAC2V1K
Standard : 47 CFR FCC Part 15.407
Operating Band : 5150 MHz – 5250 MHz
5725 MHz – 5850 MHz
Applicant : Askey Computer Corp.
10F, NO.119, JIANKANG RD., ZHONGHE DIST., NEW
TAIPEI CITY 23585, TAIWAN
Manufacturer : Askey Computer Corp.
10F, NO.119, JIANKANG RD., ZHONGHE DIST., NEW
TAIPEI CITY 23585, TAIWAN
Function : ☐ Outdoor; ☒ Indoor; ☐ Fixed P2P
☐ Client

The product sample received on Feb. 15, 2017 and completely tested on Mar. 02, 2017. We, SPORTON, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.



Cliff Chang
SPORTON INTERNATIONAL INC.





Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Testing Applied Standards	8
1.3	Testing Location Information	8
1.4	Measurement Uncertainty	9
2	TEST CONFIGURATION OF EUT	10
2.1	Test Channel Mode	10
2.2	The Worst Case Measurement Configuration.....	11
2.3	EUT Operation during Test	12
2.4	Accessories	12
2.5	Support Equipment.....	13
2.6	Test Setup Diagram	14
3	TRANSMITTER TEST RESULT	17
3.1	AC Power-line Conducted Emissions	17
3.2	Emission Bandwidth	19
3.3	Maximum Conducted Output Power	20
3.4	Peak Power Spectral Density.....	22
3.5	Unwanted Emissions.....	25
3.6	Frequency Stability.....	29
4	TEST EQUIPMENT AND CALIBRATION DATA	30
APPENDIX A. TEST RESULTS OF AC POWER-LINE CONDUCTED EMISSIONS		
APPENDIX B. TEST RESULTS OF EMISSION BANDWIDTH		
APPENDIX C. TEST RESULTS OF MAXIMUM CONDUCTED OUTPUT POWER		
APPENDIX D. TEST RESULTS OF PEAK POWER SPECTRAL DENSITY		
APPENDIX E. TEST RESULTS OF UNWANTED EMISSIONS		
APPENDIX F. TEST RESULTS OF FREQUENCY STABILITY		
APPENDIX G. TEST RESULTS OF RADIATED EMISSION CO-LOCATION		
APPENDIX H. TEST PHOTOS		
PHOTOGRAPHS OF EUT V01		



Summary of Test Result

Conformance Test Specifications			
Report Clause	Ref. Std. Clause	Description	Result
1.1.3	15.203	Antenna Requirement	Complied
3.1	15.207	AC Power-line Conducted Emissions	Complied
3.2	15.407(a)	Emission Bandwidth	Complied
3.3	15.407(a)	Maximum Conducted Output Power	Complied
3.4	15.407(a)	Peak Power Spectral Density	Complied
3.5	15.407(b)	Unwanted Emissions	Complied
3.6	15.407(g)	Frequency Stability	Complied



SPORTON INTERNATIONAL INC.
TEL : 886-3-3273456
FAX : 886-3-3270973
FCC ID: H8NRAC2V1K

1 General Description

1.1 Information

1.1.1 RF General Information

Frequency Range (MHz)	IEEE Std. 802.11	Ch. Frequency (MHz)	Channel Number
5150-5250	a, n (HT20), ac (VHT20)	5180-5240	36-48 [4]
5725-5850		5745-5825	149-165 [5]
5150-5250	n (HT40), ac (VHT40)	5190-5230	38-46 [2]
5725-5850		5755-5795	151-159 [2]
5150-5250	ac (VHT80)	5210	42 [1]
5725-5850		5775	155 [1]

Band	Mode	BWch (MHz)	Nant
5.15-5.25GHz	802.11a	20	4TX
5.15-5.25GHz	802.11n HT20	20	4TX
5.15-5.25GHz	802.11n HT20,TXBF	20	4TX
5.15-5.25GHz	802.11ac VHT20	20	4TX
5.15-5.25GHz	802.11ac VHT20,TXBF	20	4TX
5.15-5.25GHz	802.11n HT40	40	4TX
5.15-5.25GHz	802.11n HT40,TXBF	40	4TX
5.15-5.25GHz	802.11ac VHT40	40	4TX
5.15-5.25GHz	802.11ac VHT40,TXBF	40	4TX
5.15-5.25GHz	802.11ac VHT80	80	4TX
5.15-5.25GHz	802.11ac VHT80,TXBF	40	4TX
5.15-5.25GHz	802.11ac VHT80+80	80	4TX(Port 1/2)
5.15-5.25GHz	802.11ac VHT80+80-BF	80	4TX(Port 1/2)
5.725-5.85GHz	802.11a	20	4TX
5.725-5.85GHz	802.11n HT20	20	4TX
5.725-5.85GHz	802.11n HT20,TXBF	20	4TX
5.725-5.85GHz	802.11ac VHT20	20	4TX
5.725-5.85GHz	802.11ac VHT20,TXBF	20	4TX
5.725-5.85GHz	802.11n HT40	40	4TX
5.725-5.85GHz	802.11n HT40,TXBF	40	4TX
5.725-5.85GHz	802.11ac VHT40	40	4TX
5.725-5.85GHz	802.11ac VHT40,TXBF	40	4TX
5.725-5.85GHz	802.11ac VHT80	80	4TX
5.725-5.85GHz	802.11ac VHT80,TXBF	40	4TX



Band	Mode	BWch (MHz)	Nant
5.725-5.85GHz	802.11ac VHT80+80	80	4TX(Port 3/4)
5.725-5.85GHz	802.11ac VHT80+80-BF	80	4TX(Port 3/4)

Note:

- ♦ 11a, HT20 and HT40 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.
- ♦ VHT20, VHT40 and VHT80 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM modulation.
- ♦ BWch is the nominal channel bandwidth.
- ♦ Nss-Min is the minimum number of spatial streams.
- ♦ Nant is the number of outputs. e.g., 2(2,3) means have 2 outputs for port 2 and port 3. 2 means have 2 outputs for port 1 and port 2.

1.1.2 Table for 80+80 MHz Mode

Type	Channel No.	Frequency
1	42+155	5210+5775 MHz

1.1.3 Antenna Information

Ant.	Brand	Part Number	Antenna Type	Connector	Gain (dBi)	Remark
1	Airgain	N2420GS	PCB Antenna	I-PEX	4.30	2.4GHz TX/RX
2	Airgain	N2420GS	PCB Antenna	I-PEX	3.40	2.4GHz TX/RX
3	Airgain	N2420GS	PCB Antenna	I-PEX	3.50	2.4GHz TX/RX
4	Airgain	N2420GS	PCB Antenna	I-PEX	4.20	2.4GHz TX/RX
5	Airgain	M5x05C (Longer)	PCB Antenna	I-PEX	5.00	5GHz TX/RX
6	Airgain	M5x05C	PCB Antenna	I-PEX	5.60	5GHz TX/RX
7	Airgain	M5x05C	PCB Antenna	I-PEX	4.50	5GHz TX/RX
8	Airgain	M5x05C (Longer)	PCB Antenna	I-PEX	4.10	5GHz TX/RX

Note: The EUT has eight antennas.

For 2.4GHz function (4TX/4RX):

Ant. 1 (P1), Ant. 2 (P2), Ant. 3 (P3) and Ant. 4 (P4) could transmit/receive simultaneously.

For 5GHz function (4TX/4RX):

Ant. 5 (P1), Ant. 6 (P2), Ant. 7 (P3) and Ant. 8 (P4) could transmit/receive simultaneously.

1.1.4 Mode Test Duty Cycle

Mode	DC	DCF(dB)
802.11ac VHT20,TXBF	0.931	0.311
802.11ac VHT40,TXBF	0.924	0.343
802.11ac VHT80,TXBF	0.94	0.269
802.11ac VHT80+80-BF	0.945	0.246

1.1.5 EUT Operational Condition

EUT Power Type	From power adapter		
Beamforming Function	☒	With beamforming	☐ Without beamforming
	The product has beamforming function for 802.11n/ac.		

Note: There are two functions of EUT, one is beamforming function, and the other is non-beamforming function for 802.11n/ac. The beamforming function was tested and recorded in this report, and the non-beamforming function was tested and recorded in Report No. : FR711935-01AB.

1.2 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ◆ 47 CFR FCC Part 15
- ◆ ANSI C63.10-2013
- ◆ FCC KDB 789033 D02 v01r03
- ◆ FCC KDB 644545 D03 v01
- ◆ FCC KDB 662911 D01 v02r01

1.3 Testing Location Information

Testing Location				
☐	HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.	TEL : 886-3-327-3456	FAX : 886-3-318-0055
☒	JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C.	TEL : 886-3-656-9065	FAX : 886-3-656-9085

Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
RF Conducted	TH01-CB	Serway Li	22°C / 55%	Feb. 20, 2017~Mar. 02, 2017
Radiated	03CH01-CB	Jay Luo	22°C / 54%	Feb. 15, 2017~Feb. 24, 2017
AC Conduction	CO01-CB	Deven Huang	23°C / 66%	Feb. 17, 2017

Test site Designation No. TW0006 with FCC

Test site registered number IC 4086D with Industry Canada.

1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	3.2 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	3.6 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.7 dB	Confidence levels of 95%
Output Power Measurement	1.33 dB	Confidence levels of 95%
Power Density Measurement	1.27 dB	Confidence levels of 95%
Bandwidth Measurement	9.74×10^{-8}	Confidence levels of 95%
Frequency Stability	6.06×10^{-8}	Confidence levels of 95%

2 Test Configuration of EUT

2.1 Test Channel Mode

Mode	Power Setting
802.11ac VHT20,TXBF_Nss1,(MCS0)_4TX	-
5180MHz	23
5200MHz	23
5240MHz	23
5745MHz	24
5785MHz	24
5825MHz	24
802.11ac VHT40,TXBF_Nss1,(MCS0)_4TX	-
5190MHz	23
5230MHz	23
5755MHz	24
5795MHz	25
802.11ac VHT80,TXBF_Nss1,(MCS0)_4TX	-
5210MHz	30
5775MHz	24
802.11ac VHT80+80-BF_Nss1,(MCS0)_4TX	-
#5210MHz,5775MHz	25
5210MHz,#5775MHz	25

Note:

- ♦ VHT20/VHT40 covers HT20/HT40, due to same modulation. The power setting for 802.11n HT20 and HT40 are the same or lower than 802.11ac VHT20 and VHT40.

2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral
Operating Mode	Normal Link
1	EUT + Adapter 1
2	EUT + Adapter 2
For operating mode 1 is the worst case and it was record in this test report.	

The Worst Case Mode for Following Conformance Tests	
Tests Item	Emission Bandwidth Maximum Conducted Output Power Peak Power Spectral Density Frequency Stability
Test Condition	Conducted measurement at transmit chains

The Worst Case Mode for Following Conformance Tests	
Tests Item	Unwanted Emissions
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.
Operating Mode < 1GHz	Normal Link
1	EUT + Adapter 1
2	EUT + Adapter 2
For operating mode 1 is the worst case and it was record in this test report.	
Operating Mode > 1GHz	CTX

The Worst Case Mode for Following Conformance Tests	
Tests Item	Simultaneous Transmission Analysis
Test Condition	Radiated measurement
Operating Mode	Normal Link
1	WLAN 2.4GHz+WLAN 5GHz
Refer to Sporton Test Report No.: FA711935-01 for Co-location RF Exposure Evaluation and Appendix G for Radiated Emission Co-location.	

Note: The EUT can only be used at Y axis position.

2.3 EUT Operation during Test

For CTX Mode:

For Conducted Mode:

The EUT was programmed to be in continuously transmitting mode.

For Radiated Mode:

During the test, the following programs under WIN 7 were executed.

The program was executed as follows:

1. During the test, the EUT operation to normal function.
2. Executed command fixed test channel under Telnet.
3. Executed "Lantest.exe" to link with the remote workstation to transmit and receive packet by RX Device and transmit duty cycle no less 98%.

For Normal Link:

During the test, the EUT operation to normal function.

2.4 Accessories

Accessories				
No.	Equipment Name	Brand Name	Model No.	Rating
1	Adapter 1	Sunny	SYS1564-3012-W2	INPUT: 100-240Vac, 50-60Hz, 1.0A MAX. OUTPUT: 12Vdc, 2.5A
2	Adapter 2	Ktec	KSA-36W-120250HU	INPUT: 100-240Vac, 50/60Hz, 1.0A OUTPUT: 12Vdc, 2.5A

2.5 Support Equipment

For Test Site No: CO01-CB

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
1	NB*4	DELL	E6430	DoC
2	Flash disk3.0	Transcend	639205 7755	DoC

For Test Site No: 03CH01-CB (below 1GHz)

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
1	NB*4	DELL	E4300	DoC
2	Flash disk3.0	Transcend	JetFlash-700	DoC


For Test Site No: 03CH01-CB (above 1GHz)

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
1	NB*2	DELL	E4300	DoC
2	RX Device (DBDC ROUTER)	Charter	RAC2V1K	H8NRAC2V1K


For Test Site No: TH01-CB

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
1	NB	DELL	E4300	DoC

2.6 Test Setup Diagram

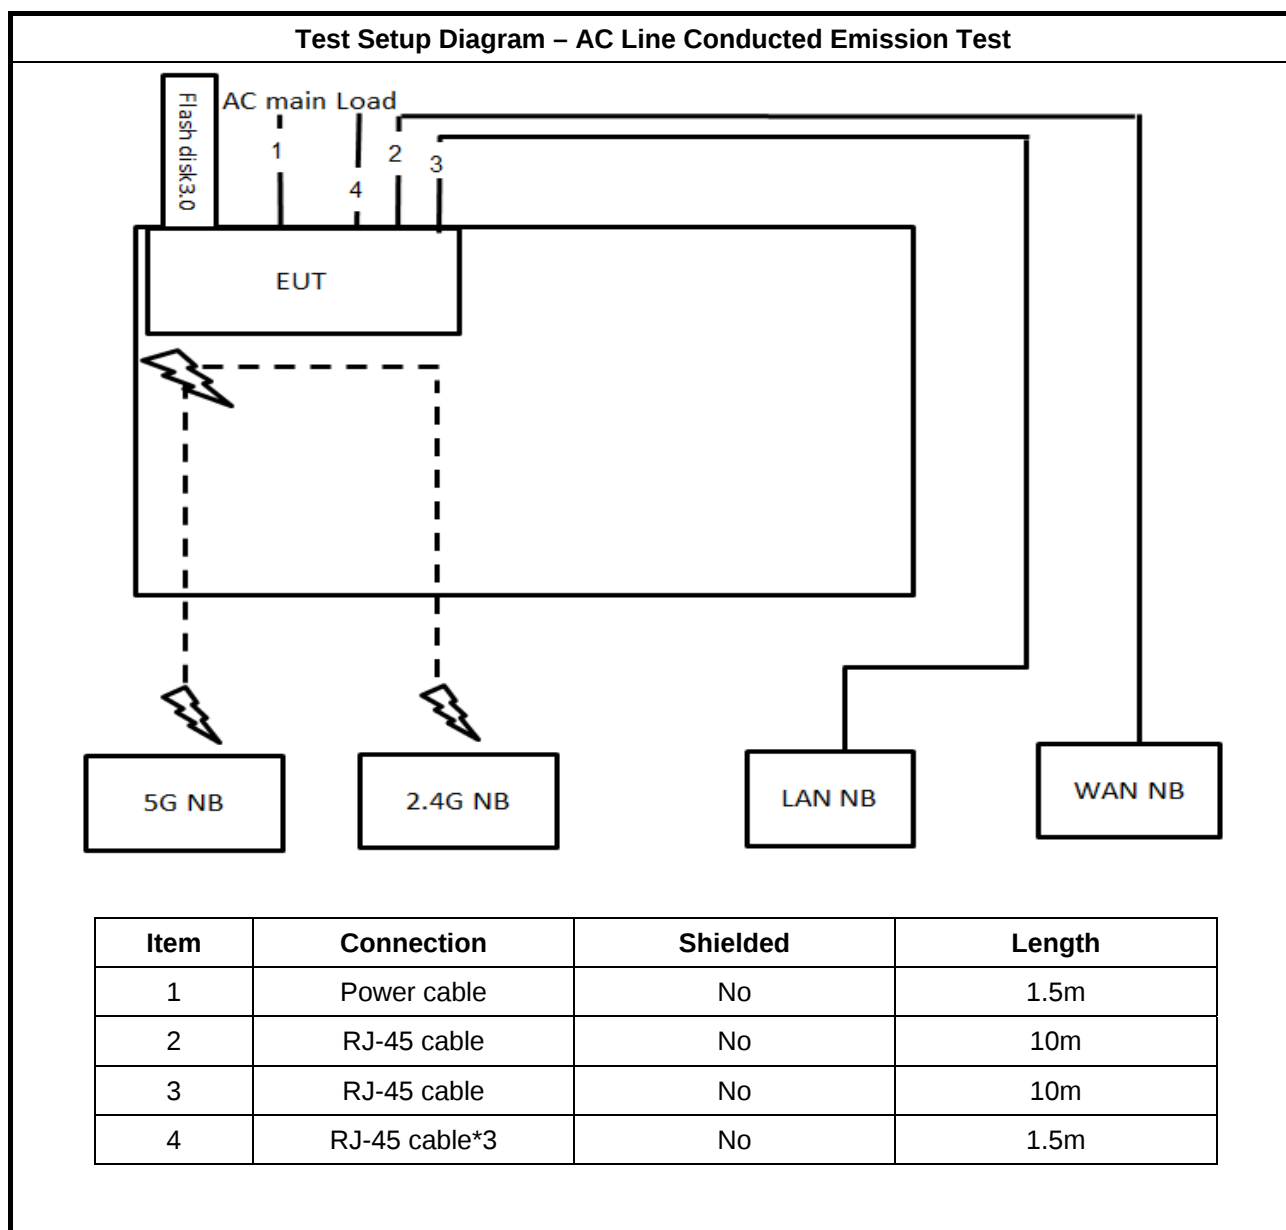


Test Setup Diagram - Radiated Test < 1GHz

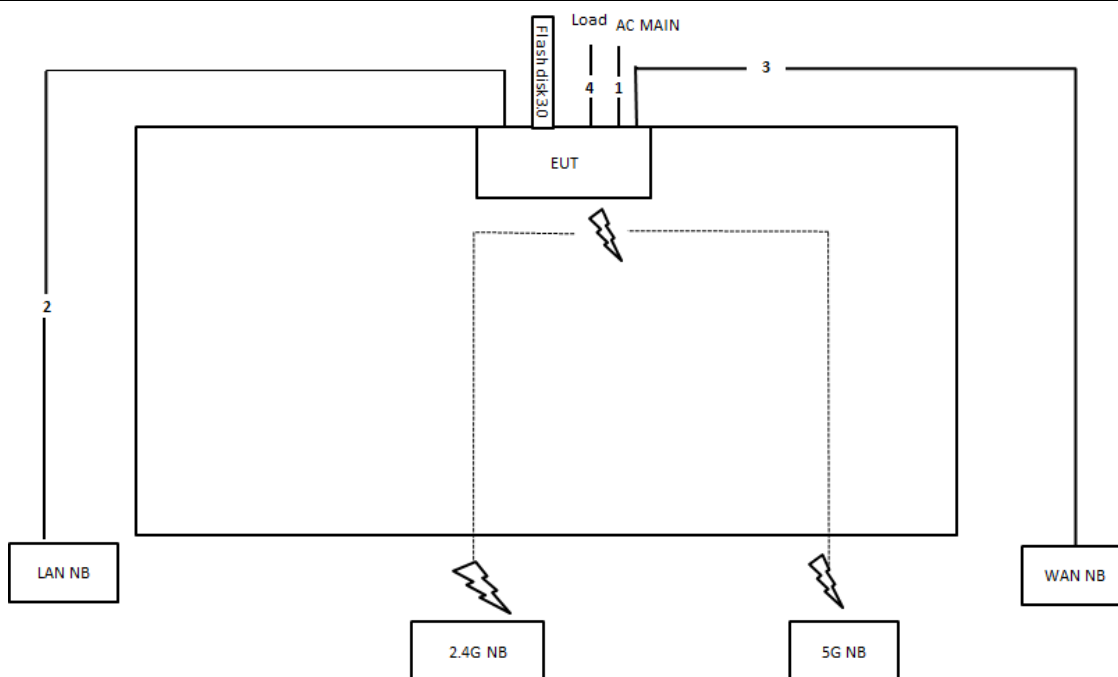

Item	Connection	Shielded	Length
1	Power cable	No	1.5m
2	RJ-45 cable	No	10m
3	RJ-45 cable	No	10m
4	RJ-45 cable*3	No	1m

Test Setup Diagram - Radiated Test > 1GHz

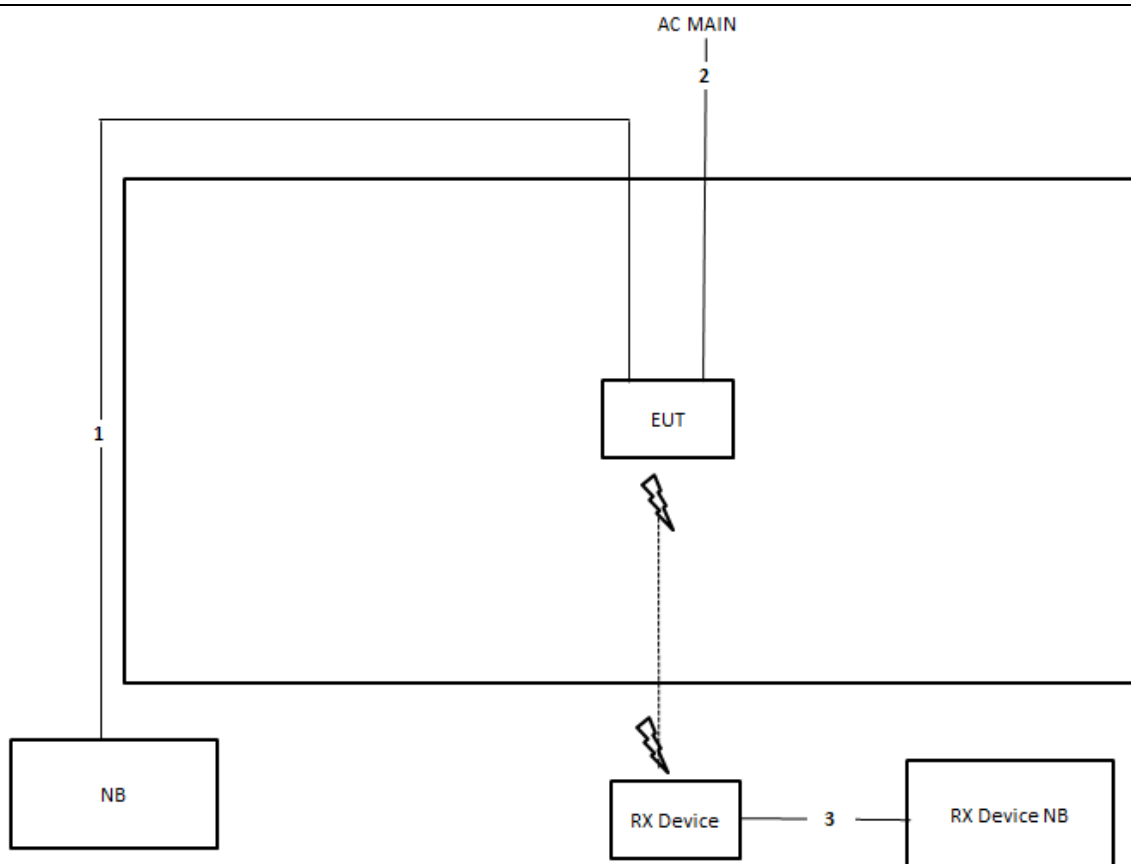

Item	Connection	Shielded	Length
1	RJ-45 cable	No	10m
2	Power cable	No	1.5m
3	RJ-45 cable	No	10m

3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

Test Method
☒ Refer as ANSI C63.10-2013, clause 6.2 for AC power-line conducted emissions.

3.1.4 Test Setup

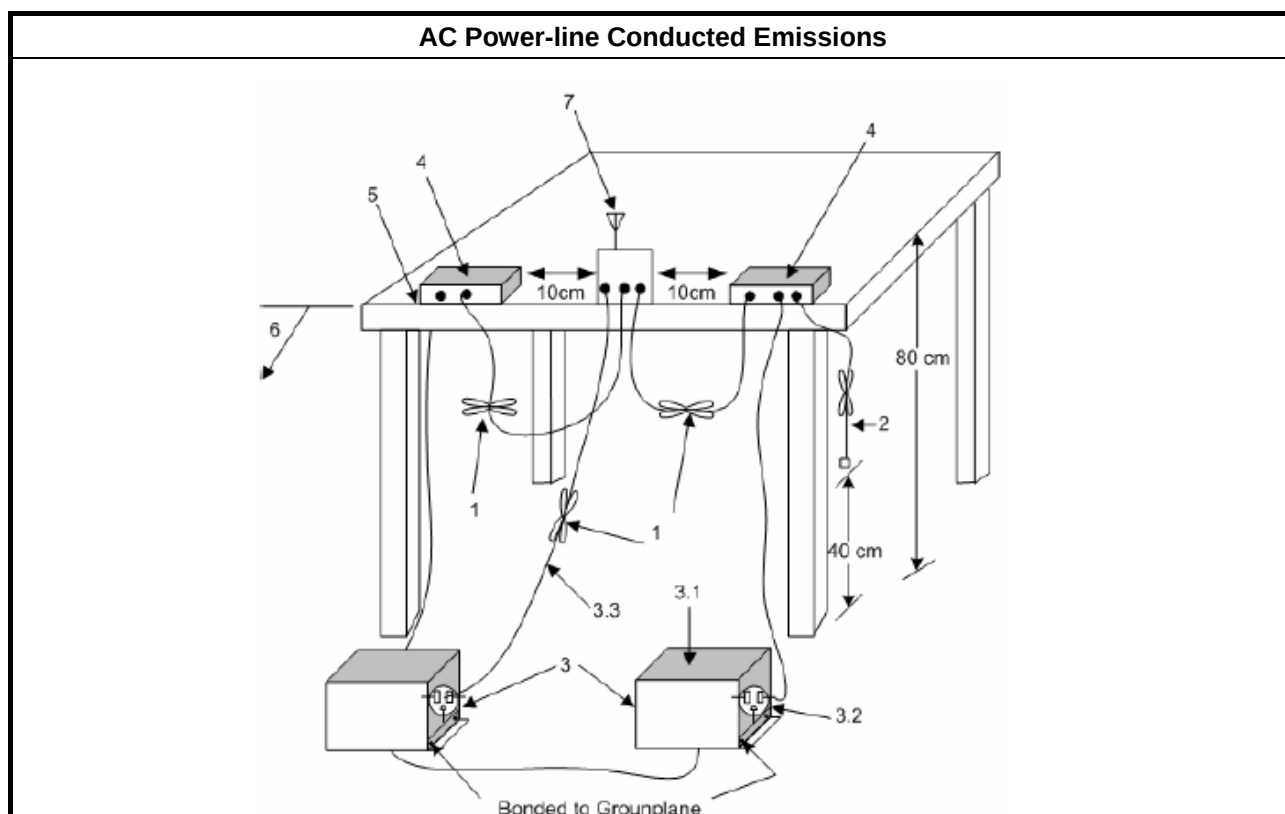



3.1.5 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A

3.2 Emission Bandwidth

3.2.1 Emission Bandwidth Limit

Emission Bandwidth Limit	
UNII Devices	
☒	For the 5.15-5.25 GHz band, N/A
☐	For the 5.25-5.35 GHz band, the maximum conducted output power shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz.
☐	For the 5.47-5.725 GHz band, the maximum conducted output power shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz.
☒	For the 5.725-5.85 GHz band, 6 dB emission bandwidth $\geq$ 500kHz.
LE-LAN Devices	
☐	For the band 5.15-5.25 GHz, the maximum e.i.r.p. shall not exceed 200 mW or 10 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.
☐	For the 5.25-5.35 GHz band, the maximum e.i.r.p. shall not exceed 1.0 W or 17 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz
☐	For the 5.47-5.6 GHz band and 5.65-5.725 GHz band, the maximum e.i.r.p. shall not exceed 1.0 W or 17 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz
☐	For the 5.725-5.85 GHz band, 6 dB emission bandwidth $\geq$ 500kHz.


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method	
For the emission bandwidth shall be measured using one of the options below:	
☒	Refer as FCC KDB 789033, clause C for EBW and clause D for OBW measurement.
☐	Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.
☒	Refer as IC RSS-Gen, clause 4.6 for bandwidth testing.

3.2.4 Test Setup

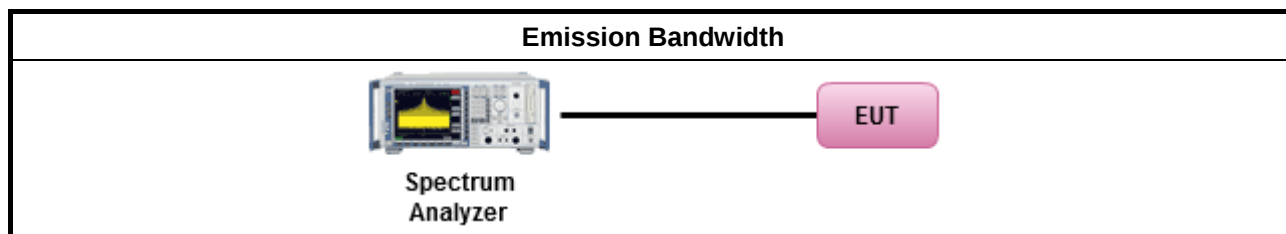

3.2.5 Test Result of Emission Bandwidth

Refer as Appendix B

3.3 Maximum Conducted Output Power

3.3.1 Maximum Conducted Output Power Limit

Maximum Conducted Output Power Limit	
UNII Devices	
☒ For the 5.15-5.25 GHz band:	
☐	- Outdoor AP: the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W. If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$. e.i.r.p. at any elevation angle above 30 degrees ≤ 125mW [21dBm] - Indoor AP: the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W. If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ - Point-to-point AP: the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W. If $G_{TX} > 23$ dBi, then $P_{Out} = 30 - (G_{TX} - 23)$. - Mobile or Portable Client: the maximum conducted output power (P_{Out}) shall not exceed the lesser of 250 mW. If $G_{TX} > 6$ dBi, then $P_{Out} = 24 - (G_{TX} - 6)$.
☐	For the 5.25-5.35 GHz band, the maximum conducted output power (P_{Out}) shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 24 - (G_{TX} - 6)$.
☐	For the 5.47-5.725 GHz band, the maximum conducted output power (P_{Out}) shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 24 - (G_{TX} - 6)$.
☒ For the 5.725-5.85 GHz band:	
☐	- Point-to-multipoint systems (P2M): the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W. If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$. - Point-to-point systems (P2P): the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W.
LE-LAN Devices	
☐	For the 5.15-5.25 GHz band, the maximum e.i.r.p. shall not exceed 200 mW or 10 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.
☐	For the 5.25-5.35 GHz band, the maximum e.i.r.p. shall not exceed 1.0 W or 17 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz
☐	For the 5.47-5.6 GHz band and 5.65-5.725 GHz band, the maximum e.i.r.p. shall not exceed 1.0 W or 17 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz
☐ For the 5.725-5.85 GHz band:	
☐	- Point-to-multipoint systems (P2M): the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W. If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$. - Point-to-point systems (P2P): the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W.
P_{Out} = maximum conducted output power in dBm, G_{TX} = the maximum transmitting antenna directional gain in dBi.	


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method	
Maximum Conducted Output Power	
Average over on/off periods with duty factor	
☒	For straddle channel and VHT80+80: Refer as FCC KDB 789033, clause E Method SA-2 (spectral trace averaging).
☐	Refer as FCC KDB 789033, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
Wideband RF power meter and average over on/off periods with duty factor	
☒	For other channel: Refer as FCC KDB 789033, clause E Method PM-G (using an RF average power meter).
For conducted measurement.	
If the EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.	
If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$	

3.3.4 Test Setup

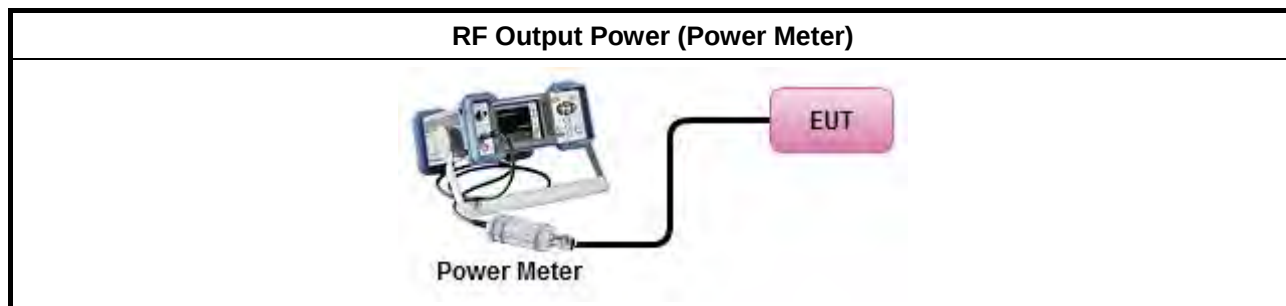

3.3.5 Test Result of Maximum Conducted Output Power

Refer as Appendix C

3.4 Peak Power Spectral Density

3.4.1 Peak Power Spectral Density Limit

Peak Power Spectral Density Limit	
UNII Devices	
☒ For the 5.15-5.25 GHz band:	
	- Outdoor AP: the peak power spectral density (PPSD) shall not exceed the lesser of 17dBm/MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 17 - (G_{TX} - 6)$. - Indoor AP: the peak power spectral density (PPSD) shall not exceed the lesser of 17dBm/MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 17 - (G_{TX} - 6)$. - Point-to-point AP: the peak power spectral density (PPSD) shall not exceed the lesser of 17dBm/MHz. If $G_{TX} > 23$ dBi, then $P_{Out} = 17 - (G_{TX} - 23)$. - Mobile or Portable Client: the peak power spectral density (PPSD) ≤ 11 dBm/MHz. If $G_{TX} > 6$ dBi, then $PPSD = 11 - (G_{TX} - 6)$.
☐ For the 5.25-5.35 GHz band, the peak power spectral density (PPSD) ≤ 11 dBm/MHz. If $G_{TX} > 6$ dBi, then $PPSD = 11 - (G_{TX} - 6)$.	
☐ For the 5.47-5.725 GHz band, the peak power spectral density (PPSD) ≤ 11 dBm/MHz. If $G_{TX} > 6$ dBi, then $PPSD = 11 - (G_{TX} - 6)$.	
☒ For the 5.725-5.85 GHz band:	
	- Point-to-multipoint systems (P2M): the peak power spectral density (PPSD) ≤ 30 dBm/500kHz. If $G_{TX} > 6$ dBi, then $PPSD = 30 - (G_{TX} - 6)$. - Point-to-point systems (P2P): the peak power spectral density (PPSD) ≤ 30 dBm/500kHz.
LE-LAN Devices	
☐ For the 5.15-5.25 GHz band, the peak power spectral density (PPSD) ≤ 4 dBm/MHz and the e.i.r.p. peak power spectral density (PPSD) ≤ 10 dBm/MHz.	
☐ For the 5.25-5.35 GHz band, the peak power spectral density (PPSD) ≤ 11 dBm/MHz and the e.i.r.p. peak power spectral density (PPSD) ≤ 17 dBm/MHz.	
	e.i.r.p. greater than 200 mW shall comply with the following e.i.r.p. at different elevations, where θ is the angle above the local horizontal plane (of the Earth) as shown below: -13 dBW/MHz for $0^\circ \leq \theta < 8^\circ$; -13 - 0.716 (θ-8) dBW/MHz for $8^\circ \leq \theta < 40^\circ$ -35.9 - 1.22 (θ-40) dBW/MHz for $40^\circ \leq \theta \leq 45^\circ$; -42 dBW/MHz for $\theta > 45^\circ$
☐ For the 5.47-5.6 GHz band and 5.65-5.725 GHz band, the peak power spectral density (PPSD) ≤ 11 dBm/MHz and the e.i.r.p. peak power spectral density (PPSD) ≤ 17 dBm/MHz.	
☐ For the 5.725-5.85 GHz band:	
	- Point-to-multipoint systems (P2M): the peak power spectral density (PPSD) ≤ 30 dBm/500kHz. If $G_{TX} > 6$ dBi, then $PPSD = 30 - (G_{TX} - 6)$. - Point-to-point systems (P2P): the peak power spectral density (PPSD) ≤ 30 dBm/500kHz.
PPSD = peak power spectral density that he same method as used to determine the conducted output power shall be used to determine the power spectral density. And power spectral density in dBm/MHz G_{TX} = the maximum transmitting antenna directional gain in dBi.	


3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

Test Method	
Peak power spectral density procedures that the same method as used to determine the conducted output power shall be used to determine the peak power spectral density and use the peak search function on the spectrum analyzer to find the peak of the spectrum. For the peak power spectral density shall be measured using below options:	
☐ Refer as FCC KDB 789033, F5) power spectral density can be measured using resolution bandwidths < 1 MHz provided that the results are integrated over 1 MHz bandwidth	
[duty cycle ≥ 98% or external video / power trigger]	
☒ Refer as FCC KDB 789033, clause E Method SA-1 (spectral trace averaging).	
☐ Refer as FCC KDB 789033, clause E Method SA-1 Alt. (RMS detection with slow sweep speed)	
duty cycle < 98% and average over on/off periods with duty factor	
☒ Refer as FCC KDB 789033, clause E Method SA-2 (spectral trace averaging).	
☐ Refer as FCC KDB 789033, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)	
For conducted measurement.	
If the EUT supports multiple transmit chains using options given below:	
☒ Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.	
☐ Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits,	
☐ Option 3: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.	
If multiple transmit chains, EIRP PPSD calculation could be following as methods: $PPSD_{total} = PPSD_1 + PPSD_2 + \dots + PPSD_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = PPSD_{total} + DG$	

3.4.4 Test Setup

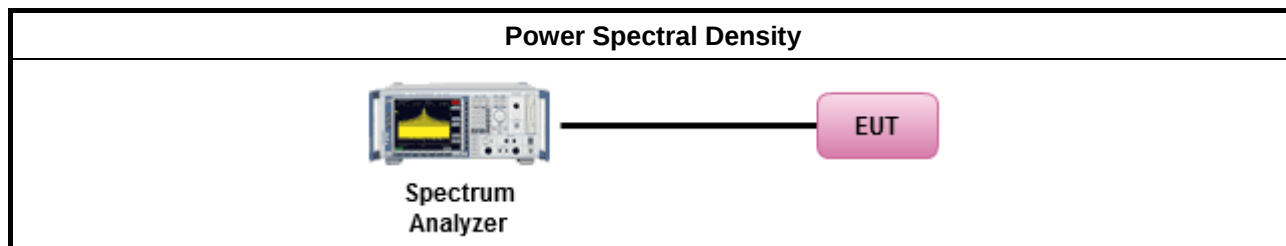



3.4.5 Test Result of Peak Power Spectral Density

Refer as Appendix D

3.5 Unwanted Emissions

3.5.1 Transmitter Radiated Unwanted Emissions Limit

Unwanted emissions below 1 GHz and restricted band emissions above 1GHz limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Un-restricted band emissions above 1GHz Limit	
Operating Band	Limit
5.15 - 5.25 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.25 - 5.35 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.47 - 5.725 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.725 - 5.85 GHz	all emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Note 1: Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).


3.5.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

Test Method	
Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 m for frequencies above 30 MHz, unless it can be further demonstrated that measurements at a distance of 30 m or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).	
The average emission levels shall be measured in [duty cycle $\geq$ 98 or duty factor].	
For the transmitter unwanted emissions shall be measured using following options below:	
	Refer as FCC KDB 789033, clause H)2) for unwanted emissions into non-restricted bands.
	Refer as FCC KDB 789033, clause H)1) for unwanted emissions into restricted bands.
	☐ Refer as FCC KDB 789033, H)6) Method AD (Trace Averaging).
	☒ Refer as FCC KDB 789033, H)6) Method VB (Reduced VBW).
	☐ Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW). VBW $\geq$ 1/T, where T is pulse time.
	☐ Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.
	☒ Refer as FCC KDB 789033, clause H)5) measurement procedure peak limit.
	☐ Refer as ANSI C63.10, clause 4.2.3.2.2 measurement procedure peak limit.
	For radiated measurement.
	Refer as ANSI C63.10, clause 6.4 for radiated emissions below 30 MHz and test distance is 3m.
	Refer as ANSI C63.10, clause 6.5 for radiated emissions 30 MHz to 1 GHz and test distance is 3m.
	Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz.
	The any unwanted emissions level shall not exceed the fundamental emission level.
All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.	

3.5.4 Test Setup

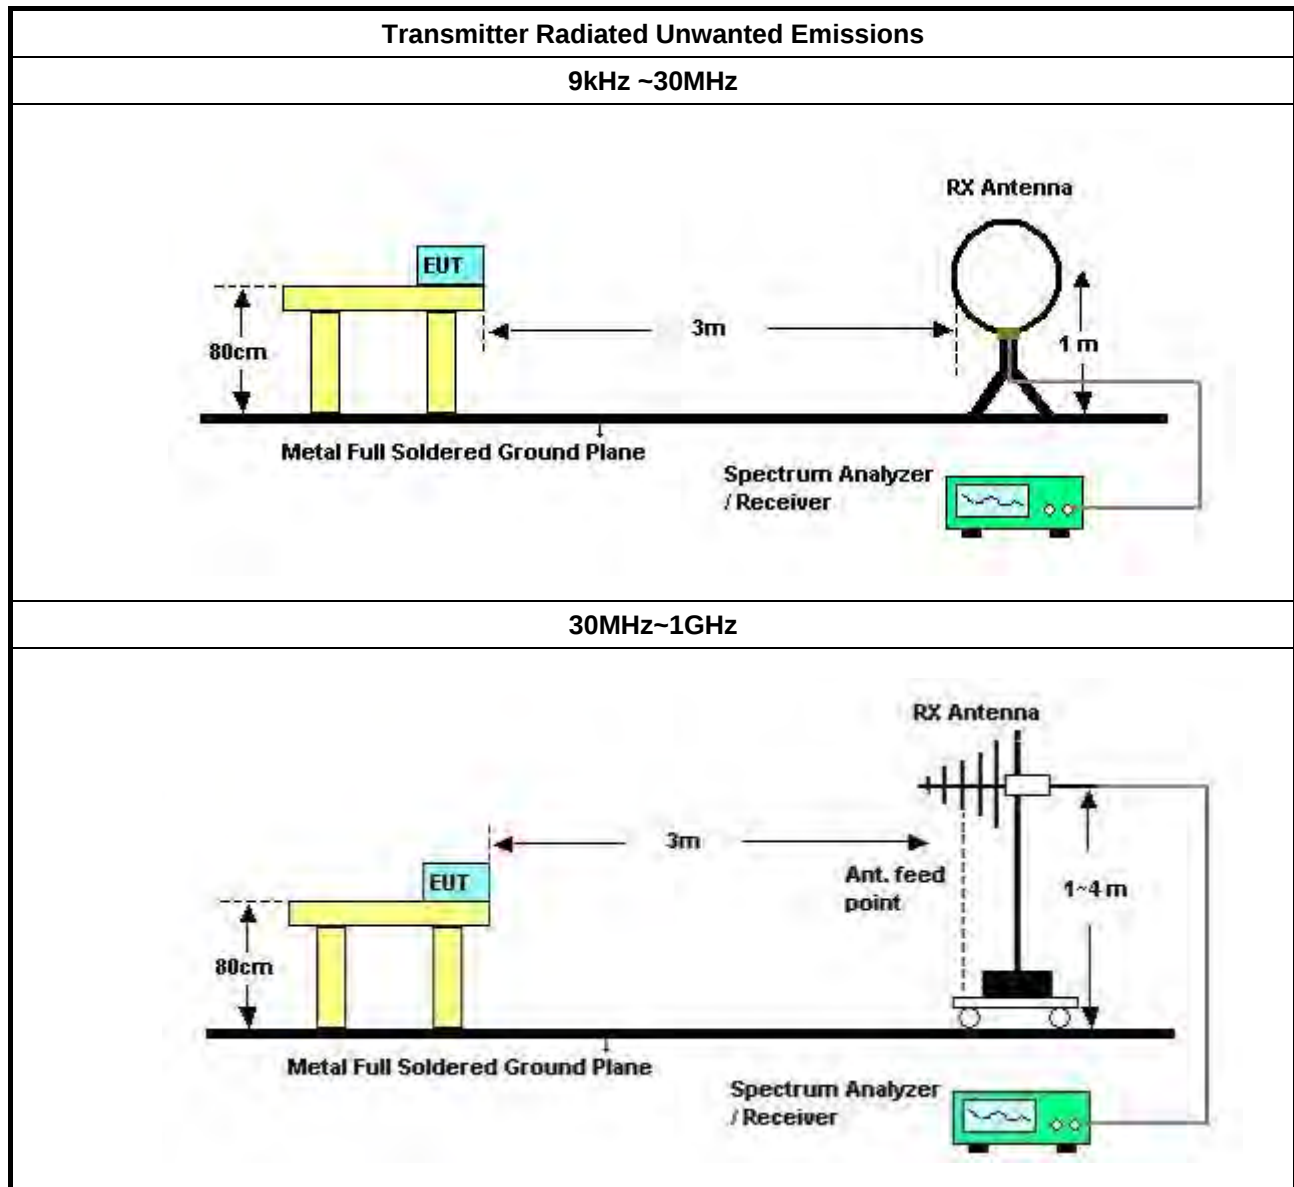

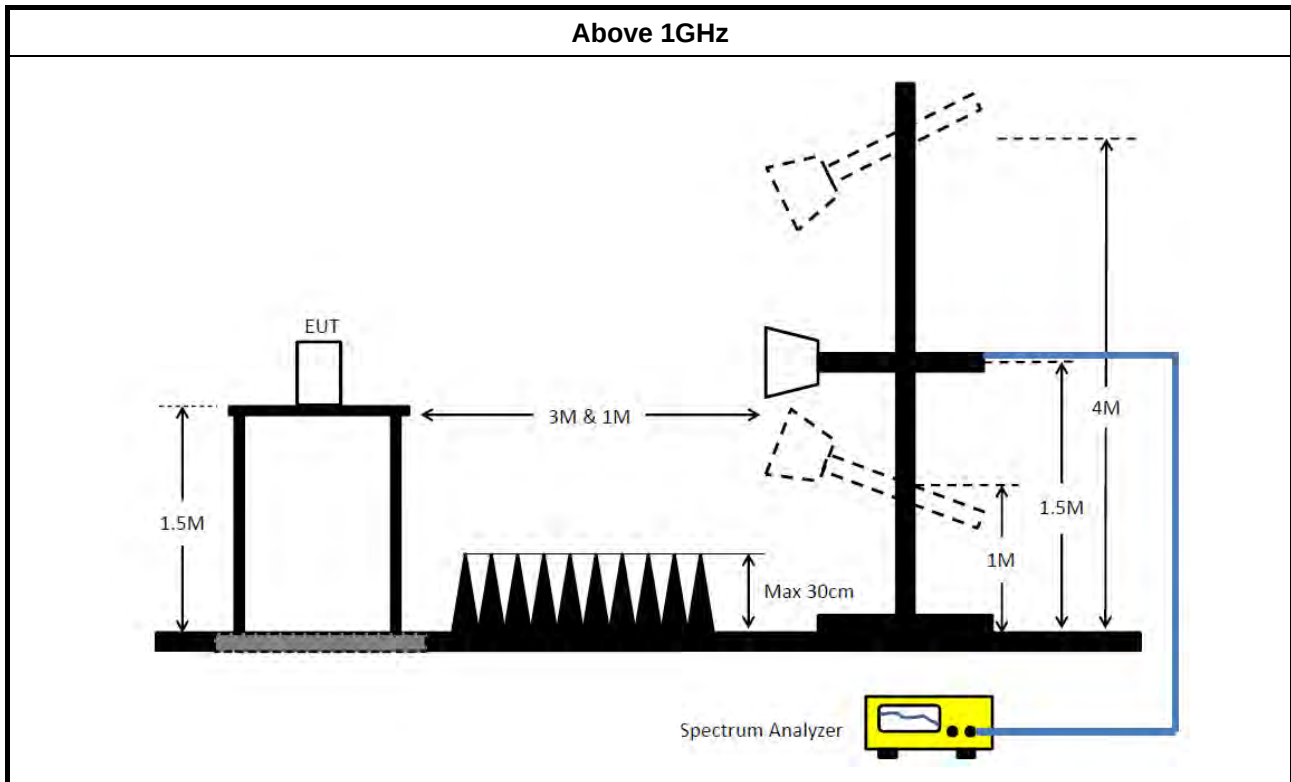

3.5.5 Transmitter Unwanted Emissions (Below 30MHz)

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

3.5.6 Test Result of Transmitter Unwanted Emissions

Refer as Appendix E

3.6 Frequency Stability

3.6.1 Frequency Stability Limit

Frequency Stability Limit
UNII Devices
In-band emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.
LE-LAN Devices
N/A
IEEE Std. 802.11
The transmitter center frequency tolerance shall be ± 20 ppm maximum for the 5 GHz band and ± 25 ppm maximum for the 2.4 GHz band.


3.6.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.6.3 Test Procedures

Test Method
Refer as ANSI C63.10, clause 6.8 for frequency stability tests
- Frequency stability with respect to ambient temperature - Frequency stability when varying supply voltage - Extreme temperature is 0°C~40°C.

3.6.4 Test Setup

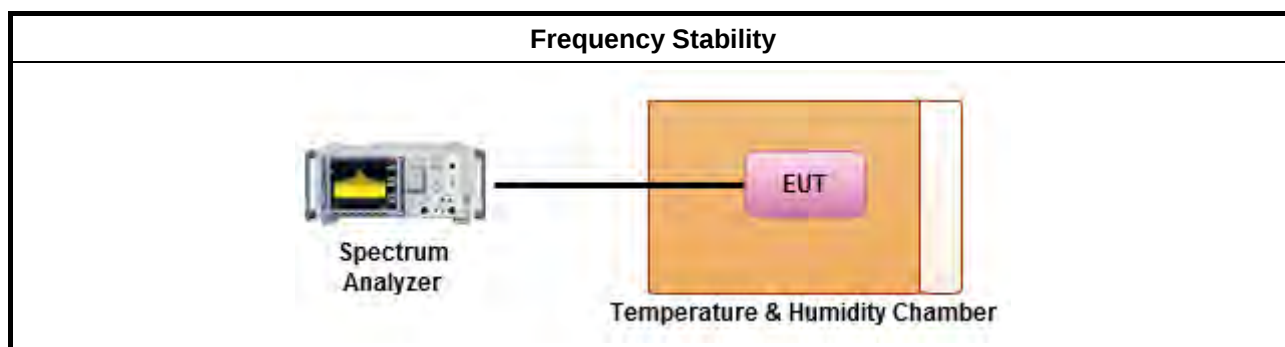

3.6.5 Test Result of Frequency Stability

Refer as Appendix F



4 Test Equipment and Calibration Data

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Receiver	Agilent	N9038A	My52260123	9kHz ~ 8.45GHz	Jan. 23, 2017	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Dec. 14, 2016	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Dec. 21, 2016	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	150kHz ~ 30MHz	May 24, 2016	Conduction (CO01-CB)
Software	Audix	E3	6.120210n	-	N.C.R.	Conduction (CO01-CB)
BILOG ANTENNA with 6dB Attenuator	TESEQ & EMCI	CBL6112D & N-6-06	37880 & AT-N0609	20MHz ~ 2GHz	Aug. 30, 2016	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz ~ 18GHz	Nov. 10, 2016	Radiation (03CH01-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Jul. 25, 2016	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Mar. 15, 2016	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Jan. 18, 2016	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Jan. 16, 2017	Radiation (03CH01-CB)
Pre-Amplifier	MITEQ	TTA1840-35-HG	1864479	18GHz ~ 40GHz	Jun. 28, 2016	Radiation (03CH01-CB)
Spectrum Analyzer	R&S	FSP40	100056	9kHz ~ 40GHz	Nov. 21, 2016	Radiation (03CH01-CB)
EMI Test	R&S	ESCS	100355	9kHz ~ 2.75GHz	May 16, 2016	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-16+17	N/A	30 MHz ~ 1 GHz	Oct. 24, 2016	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-16	N/A	1 GHz ~ 18 GHz	Oct. 24, 2016	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-16+17	N/A	1 GHz ~ 18 GHz	Oct. 24, 2016	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G#1	N/A	18GHz ~ 40 GHz	Oct. 24, 2016	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G#2	N/A	18GHz ~ 40 GHz	Oct. 24, 2016	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9kHz - 30 MHz	Mar. 16, 2016*	Radiation (03CH01-CB)
Test Software	Audix	E3	6.2009-10-7	N/A	N/A	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSV40	100979	9kHz~40GHz	Dec. 26, 2016	Conducted (TH01-CB)
Temp. and Humidity Chamber	Ten Billion	TTH-D3SP	TBN-931011	-30~100 degree	Jun. 03, 2016	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-6	1 GHz ~ 26.5 GHz	Oct. 24, 2016	Conducted (TH01-CB)




Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
RF Cable-high	Woken	RG402	High Cable-7	1 GHz –26.5 GHz	Oct. 24, 2016	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-8	1 GHz –26.5 GHz	Oct. 24, 2016	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-9	1 GHz –26.5 GHz	Oct. 24, 2016	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-10	1 GHz –26.5 GHz	Oct. 24, 2016	Conducted (TH01-CB)
Power Sensor	Agilent	U2021XA	MY53410001	50MHz~18GHz	Nov. 22, 2016	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.


“*” Calibration Interval of instruments listed above is two years.

N.C.R. means Non-Calibration required.

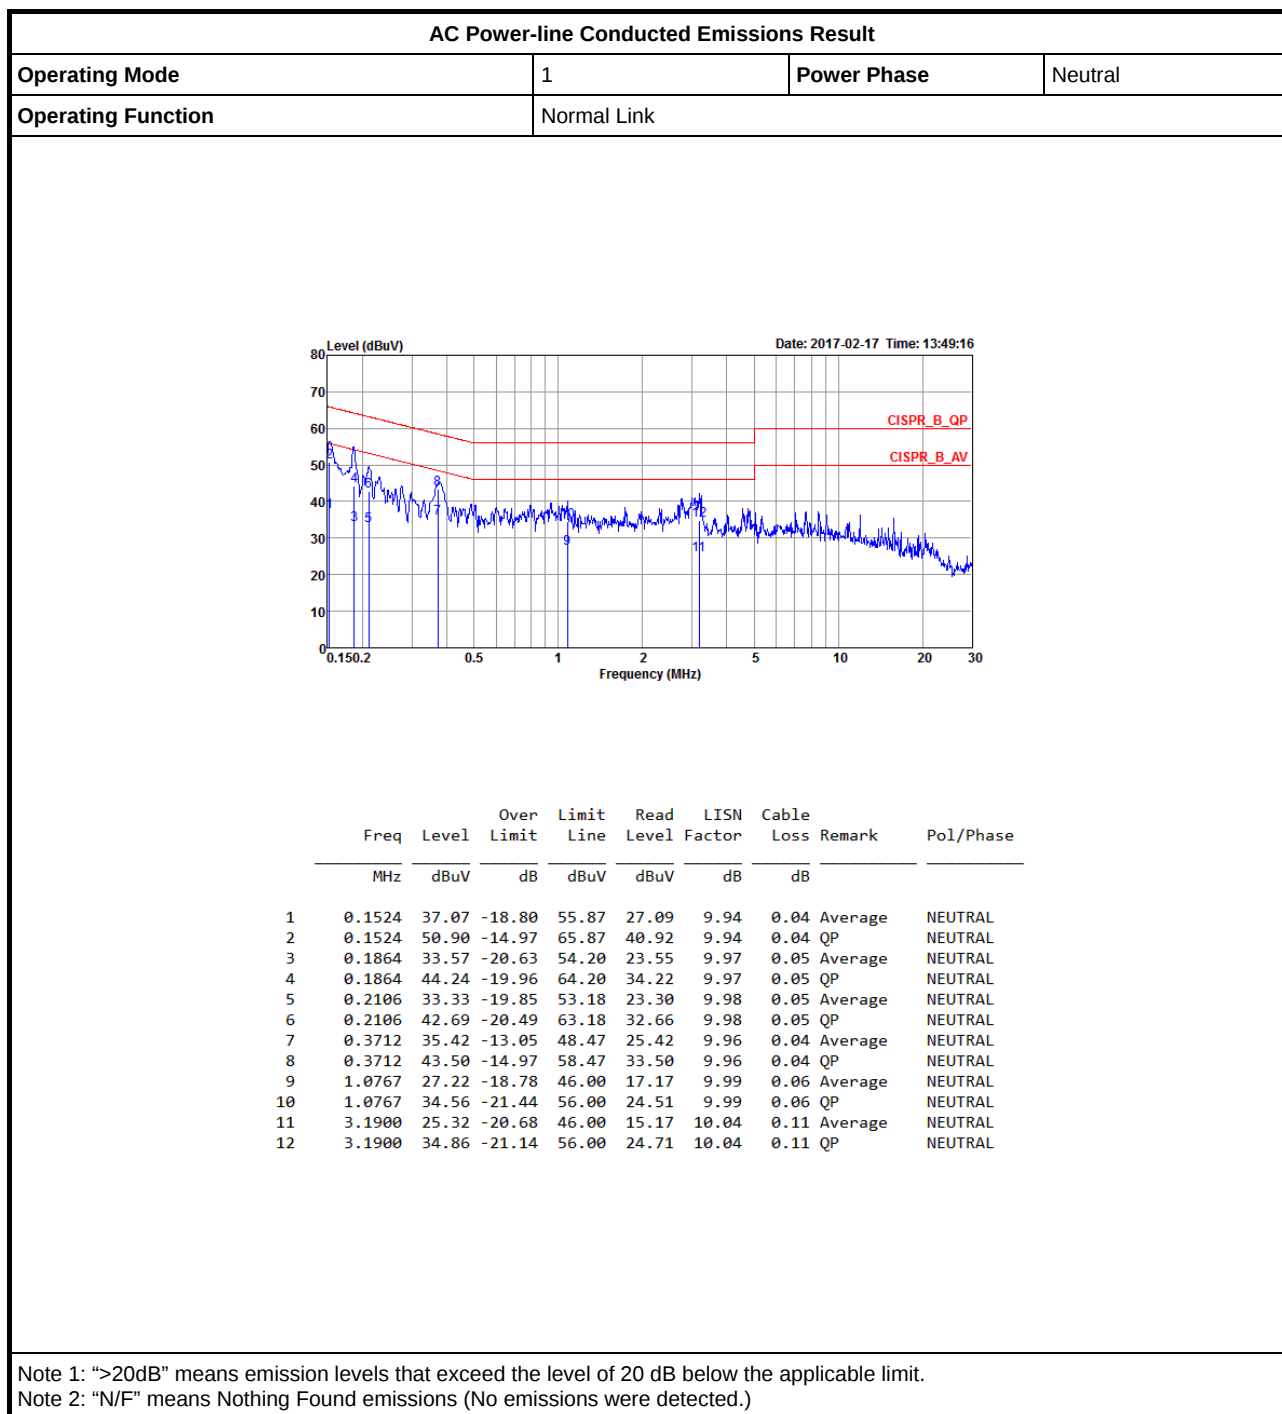

AC Power-line Conducted Emissions Result

Operating Mode	1	Power Phase	Line
Operating Function	Normal Link		

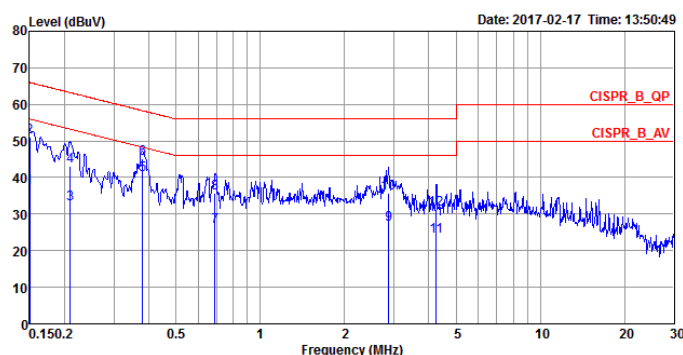

	Freq	Level	Over	Limit	Read	LISN	Cable		
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark	Pol/Phase
			dB	dBuV	dBuV	dB	dB		
1	0.1500	37.25	-18.75	56.00	27.26	9.95	0.04	Average	LINE
2	0.1500	50.99	-15.01	66.00	41.00	9.95	0.04	QP	LINE
3	0.2094	32.82	-20.41	53.23	22.84	9.93	0.05	Average	LINE
4	0.2094	43.01	-20.22	63.23	33.03	9.93	0.05	QP	LINE
5	0.3791	40.86	-7.44	48.30	30.93	9.89	0.04	Average	LINE
6	0.3791	45.12	-13.18	58.30	35.19	9.89	0.04	QP	LINE
7	0.6899	26.64	-19.36	46.00	16.65	9.94	0.05	Average	LINE
8	0.6899	35.74	-20.26	56.00	25.75	9.94	0.05	QP	LINE
9	2.8692	27.08	-18.92	46.00	17.00	9.98	0.10	Average	LINE
10	2.8692	35.74	-20.26	56.00	25.66	9.98	0.10	QP	LINE
11	4.2466	23.89	-22.11	46.00	13.80	9.96	0.13	Average	LINE
12	4.2466	31.18	-24.82	56.00	21.09	9.96	0.13	QP	LINE

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)

**11a, VHT20, VHT40 and VHT80
Summary**

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
VHT20,TXBF_Nss1,(MCS0)_4TX	-	-	-	-	-
5.15-5.25GHz	20.6M	17.616M	17M6D1D	20.25M	17.591M
5.725-5.85GHz	17.6M	17.691M	17M7D1D	17.275M	17.591M
VHT40,TXBF_Nss1,(MCS0)_4TX	-	-	-	-	-
5.15-5.25GHz	40.05M	35.982M	36M0D1D	39.05M	35.882M
5.725-5.85GHz	35.9M	36.032M	36M0D1D	32.2M	35.832M
VHT80,TXBF_Nss1,(MCS0)_4TX	-	-	-	-	-
5.15-5.25GHz	83.5M	75.862M	75M9D1D	82.8M	75.662M
5.725-5.85GHz	76.3M	75.762M	75M8D1D	75.3M	75.662M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;

Max-OBW = Maximum 99% occupied bandwidth;

Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;




Min-OBW = Minimum 99% occupied bandwidth;




Result




Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)	Port 3-N dB (Hz)	Port 3-OBW (Hz)	Port 4-N dB (Hz)	Port 4-OBW (Hz)
VHT20,TXBF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5180MHz	Pass	Inf	20.575M	17.616M	20.45M	17.616M	20.55M	17.591M	20.375M	17.591M
5200MHz	Pass	Inf	20.475M	17.616M	20.35M	17.616M	20.45M	17.616M	20.25M	17.591M
5240MHz	Pass	Inf	20.575M	17.616M	20.45M	17.616M	20.6M	17.616M	20.5M	17.591M
5745MHz	Pass	500k	17.525M	17.616M	17.6M	17.616M	17.525M	17.591M	17.55M	17.616M
5785MHz	Pass	500k	17.55M	17.616M	17.6M	17.616M	17.55M	17.616M	17.275M	17.591M
5825MHz	Pass	500k	17.55M	17.616M	17.6M	17.691M	17.575M	17.616M	17.55M	17.591M
VHT40,TXBF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5190MHz	Pass	Inf	39.85M	35.882M	39.85M	35.932M	40M	35.982M	39.2M	35.932M
5230MHz	Pass	Inf	40.05M	35.932M	39.8M	35.932M	39.4M	35.982M	39.05M	35.882M
5755MHz	Pass	500k	35.85M	35.982M	35.05M	35.832M	34.2M	36.032M	35M	35.982M
5795MHz	Pass	500k	33.85M	36.032M	32.2M	35.932M	33.2M	35.982M	35.9M	35.982M
VHT80,TXBF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5210MHz	Pass	Inf	83.1M	75.662M	83.5M	75.762M	83.4M	75.862M	82.8M	75.762M
5775MHz	Pass	500k	76.3M	75.762M	75.3M	75.662M	76.1M	75.662M	76.3M	75.762M




Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band

Port X-OBW = Port X 99% occupied bandwidth;

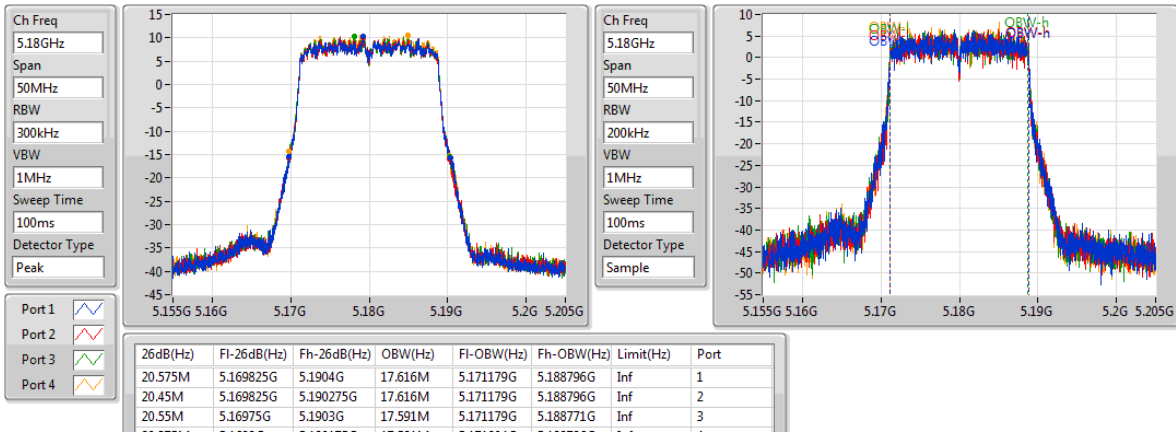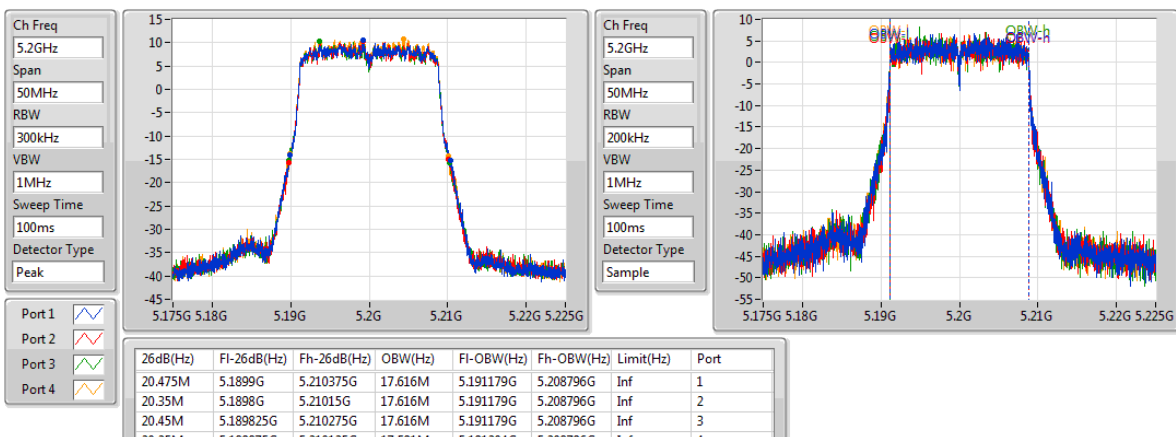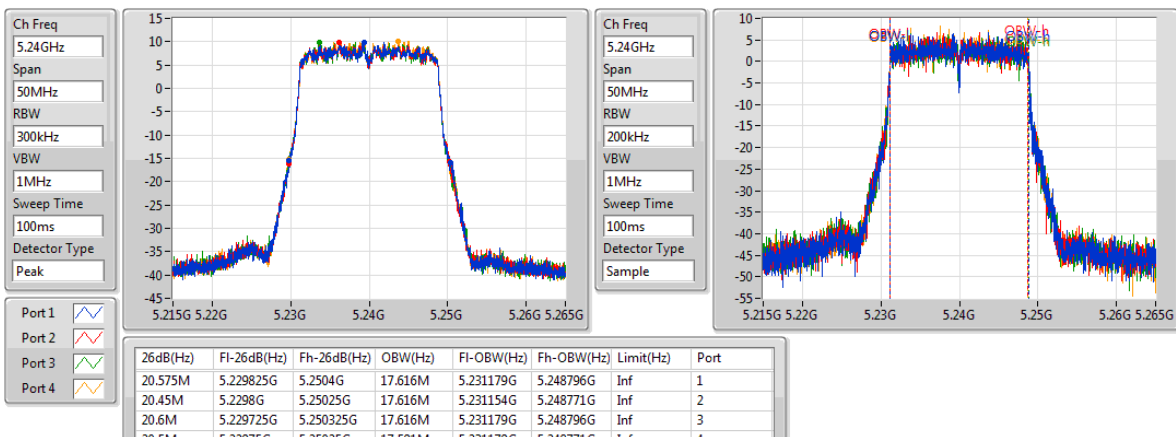VHT20,TXBF_Nss1,(MCS0)_4TX
EBW
5180MHz

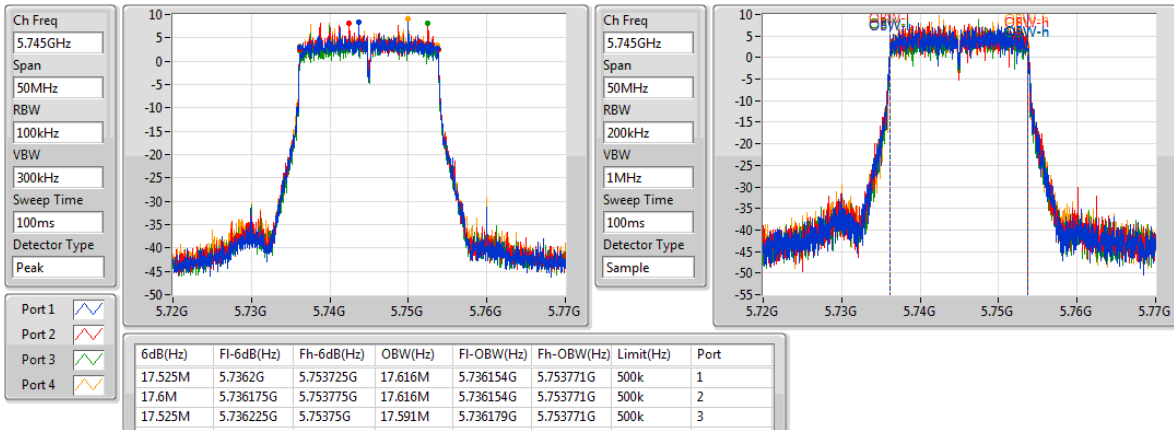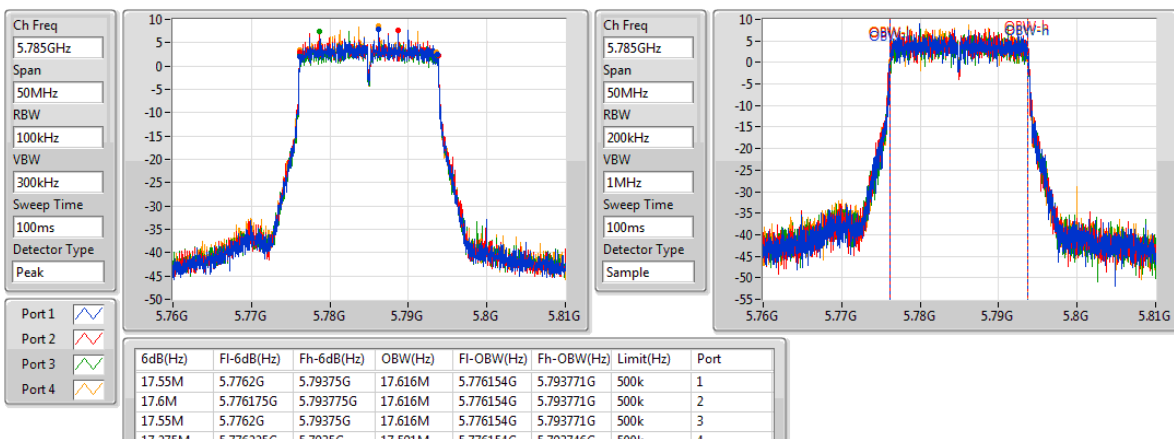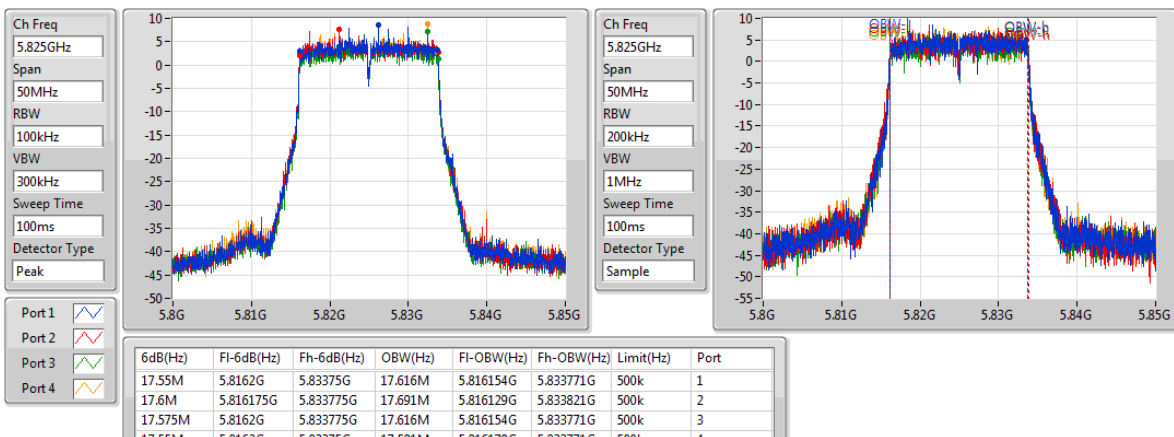VHT20,TXBF_Nss1,(MCS0)_4TX
EBW
5200MHz

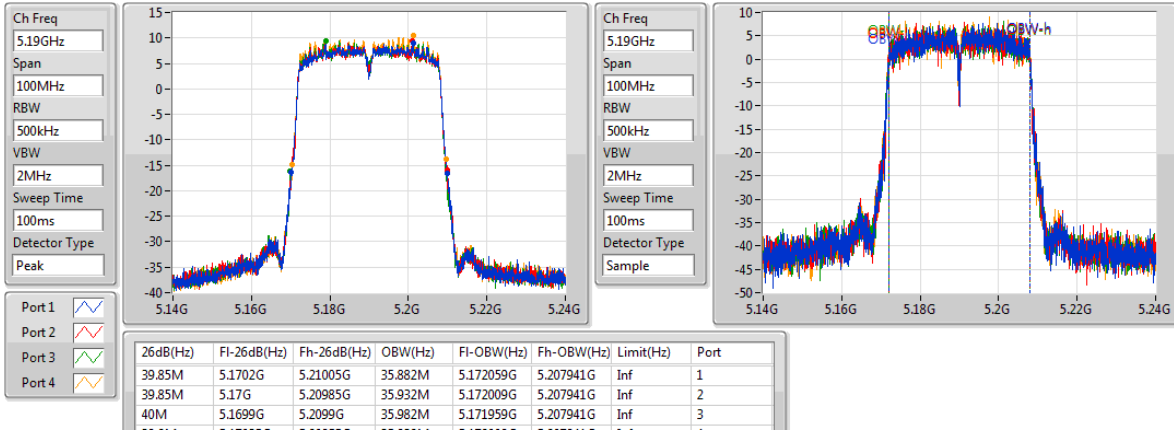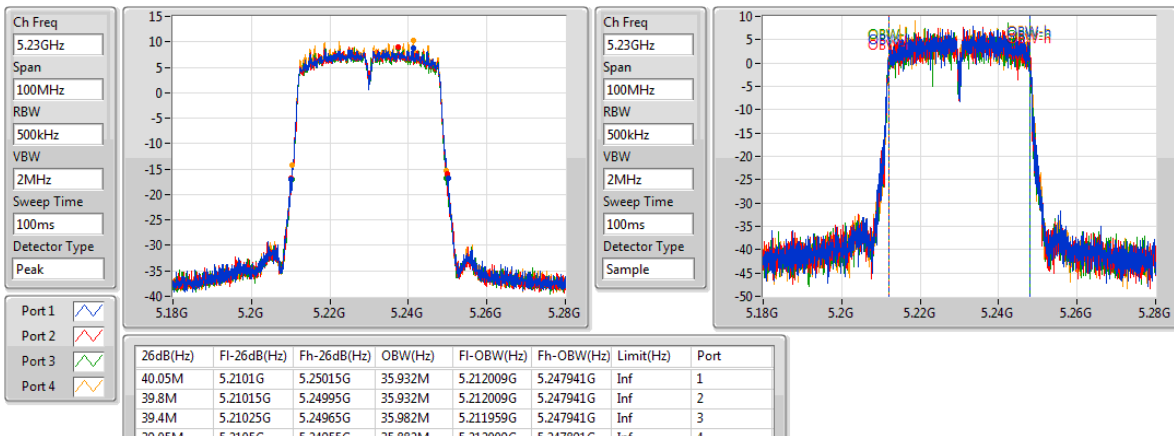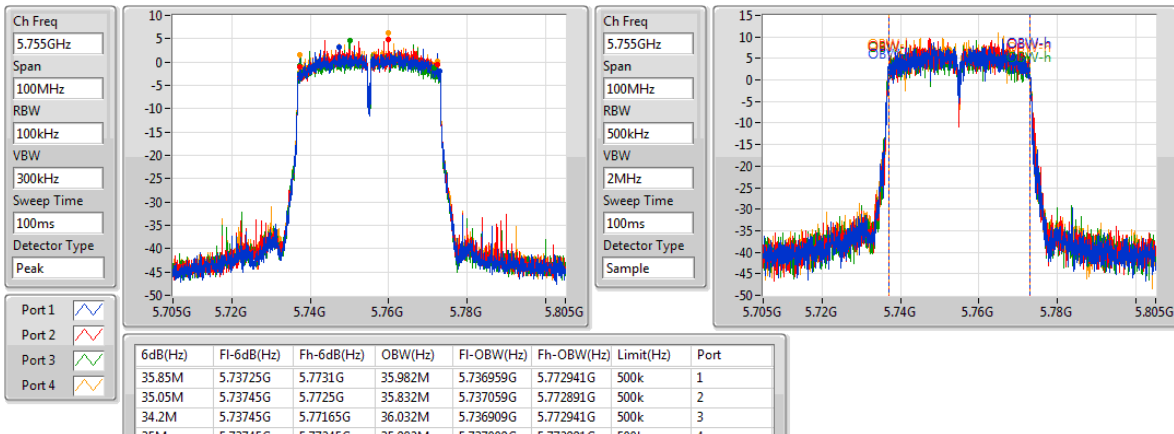VHT20,TXBF_Nss1,(MCS0)_4TX
EBW
5240MHz

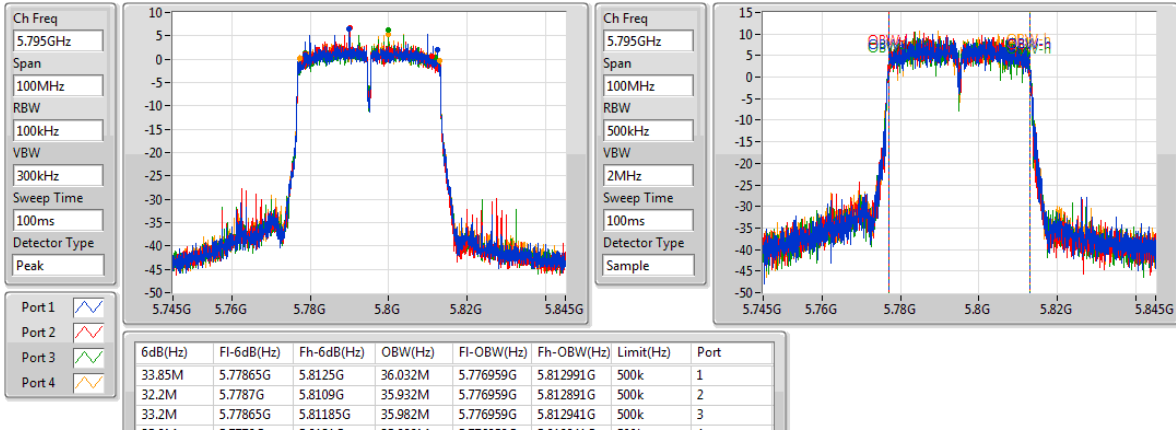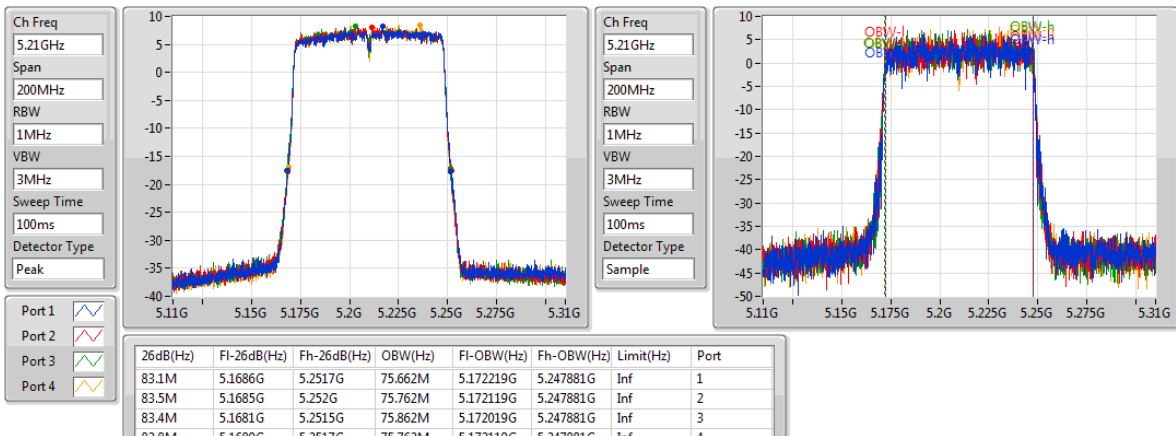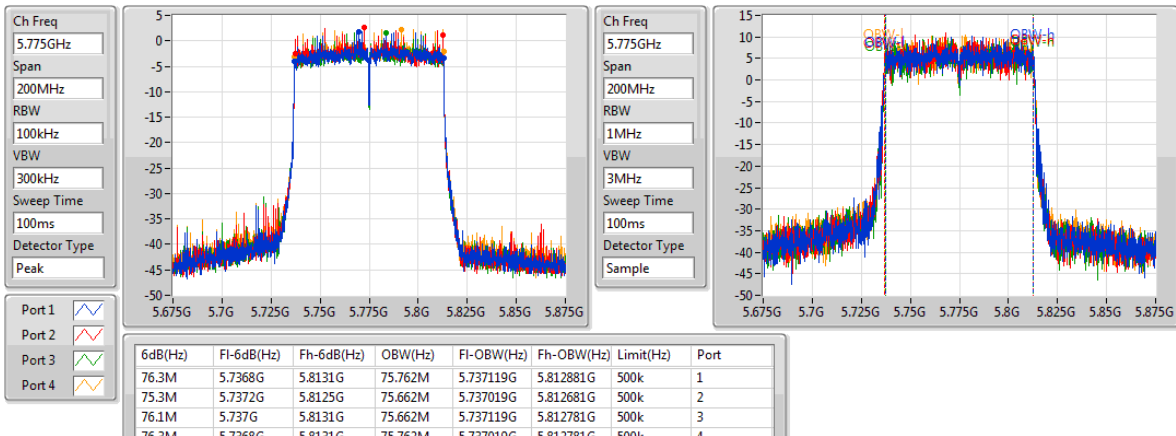
VHT20,TXBF_Nss1,(MCS0)_4TX
EBW
5745MHz

VHT20,TXBF_Nss1,(MCS0)_4TX
EBW
5785MHz

VHT20,TXBF_Nss1,(MCS0)_4TX
EBW
5825MHz


VHT40,TXBF_Nss1,(MCS0)_4TX
EBW
5190MHz

VHT40,TXBF_Nss1,(MCS0)_4TX
EBW
5230MHz

VHT40,TXBF_Nss1,(MCS0)_4TX
EBW
5755MHz


VHT40,TXBF_Nss1,(MCS0)_4TX
EBW
5795MHz

VHT80,TXBF_Nss1,(MCS0)_4TX
EBW
5210MHz

VHT80,TXBF_Nss1,(MCS0)_4TX
EBW
5775MHz


VHT80+80
Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
802.11ac VHT80+80-BF_Nss1,(MCS0)_4TX	-	-	-	-	-
5.15-5.25GHz	81.2M	75.762M	75M8D1D	80.6M	75.762M
802.11ac VHT80+80-BF_Nss1,(MCS0)_4TX	-	-	-	-	-
5.725-5.85GHz	70.8M	75.762M	75M8D1D	70M	75.162M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;

Max-OBW = Maximum 99% occupied bandwidth;

Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;



Min-OBW = Minimum 99% occupied bandwidth;

Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)	Port 3-N dB (Hz)	Port 3-OBW (Hz)	Port 4-N dB (Hz)	Port 4-OBW (Hz)
802.11ac VHT80+80-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
#5210MHz,5775MHz	Pass	Inf	80.6M	75.762M	81.2M	75.762M				
802.11ac VHT80+80-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5210MHz,#5775MHz	Pass	500k					70.8M	75.762M	70M	75.162M

Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band

Port X-OBW = Port X 99% occupied bandwidth;

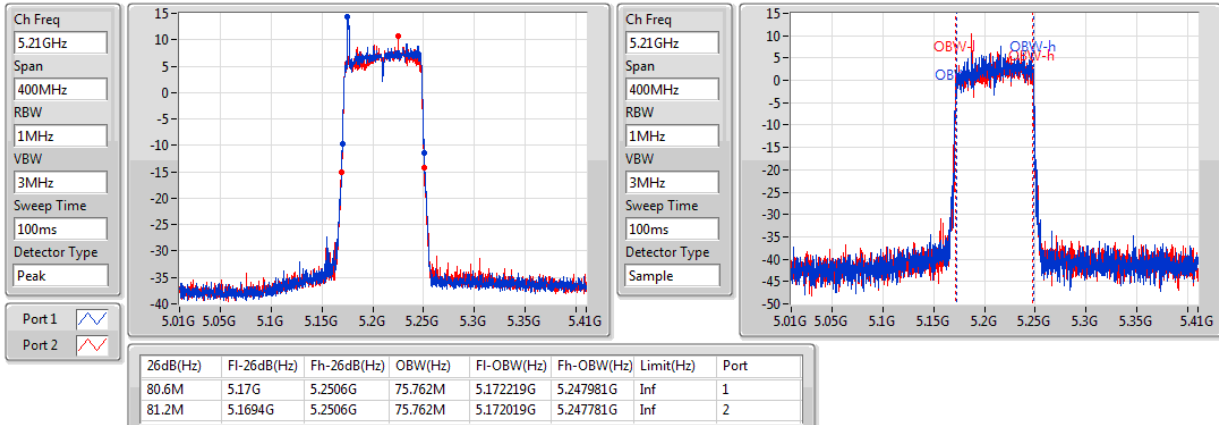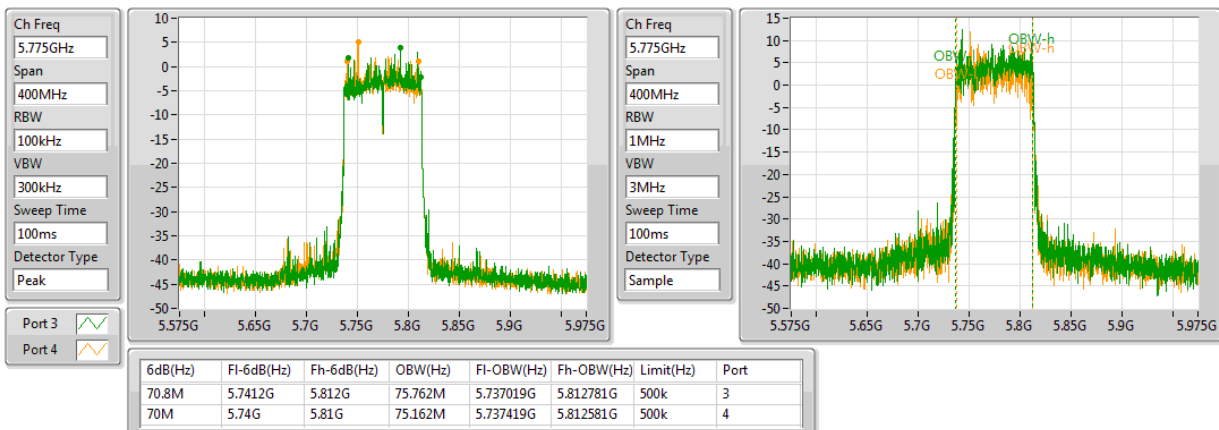802.11ac VHT80+80-BF_Nss1,(MCS0)_4TX
EBW
#5210MHz,5775MHz

802.11ac VHT80+80-BF_Nss1,(MCS0)_4TX
EBW
5210MHz,#5775MHz


**11a, VHT20, VHT40 and VHT80
Summary**

Mode	Total Power (dBm)	Total Power (W)	EIRP (dBm)	EIRP (W)
VHT20,TXBF_Nss1,(MCS0)_4TX	-	-	-	-
5.15-5.25GHz	24.74	0.29785	35.58	3.61410
5.725-5.85GHz	24.69	0.29444	35.53	3.57273
VHT40,TXBF_Nss1,(MCS0)_4TX	-	-	-	-
5.15-5.25GHz	24.59	0.28774	35.43	3.49140
5.725-5.85GHz	25.12	0.32509	35.96	3.94457
VHT80,TXBF_Nss1,(MCS0)_4TX	-	-	-	-
5.15-5.25GHz	22.87	0.19364	33.71	2.34963
5.725-5.85GHz	24.65	0.29174	35.49	3.53997

Result


Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
VHT20,TXBF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5180MHz	Pass	10.84	18.51	18.61	18.42	18.71	24.58	25.16	35.42	36.00
5200MHz	Pass	10.84	18.83	18.35	18.97	18.69	24.74	25.16	35.58	36.00
5240MHz	Pass	10.84	18.63	18.48	18.76	18.54	24.62	25.16	35.46	36.00
5720MHz Straddle 5.725-5.85GHz	Pass	10.84	4.65	6.44	4.69	5.93	11.52	25.16	22.36	36.00
5745MHz	Pass	10.84	18.56	18.75	18.42	18.85	24.67	25.16	35.51	36.00
5785MHz	Pass	10.84	18.64	18.59	18.91	18.53	24.69	25.16	35.53	36.00
5825MHz	Pass	10.84	18.49	18.73	18.56	18.47	24.58	25.16	35.42	36.00
VHT40,TXBF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5190MHz	Pass	10.84	18.42	18.27	18.65	18.53	24.49	25.16	35.33	36.00
5230MHz	Pass	10.84	18.67	18.15	18.76	18.67	24.59	25.16	35.43	36.00
5710MHz Straddle 5.725-5.85GHz	Pass	10.84	-2.00	2.27	-1.75	0.45	6.12	25.16	16.96	36.00
5755MHz	Pass	10.84	18.27	18.56	18.91	18.75	24.65	25.16	35.49	36.00
5795MHz	Pass	10.84	18.81	19.57	18.39	19.51	25.12	25.16	35.96	36.00
VHT80,TXBF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5210MHz	Pass	10.84	16.78	16.82	16.94	16.86	22.87	25.16	33.71	36.00
5690MHz Straddle 5.725-5.85GHz	Pass	10.84	-2.02	-0.95	-3.23	-3.55	3.71	25.16	14.55	36.00
5775MHz	Pass	10.84	18.25	18.84	19.01	18.36	24.65	25.16	35.49	36.00

DG = Directional Gain; **Port X** = Port X output power

VHT20,TXBF_Nss1,(MCS0)_4TX

AV Power


5720MHz Straddle 5.725-5.85GHz

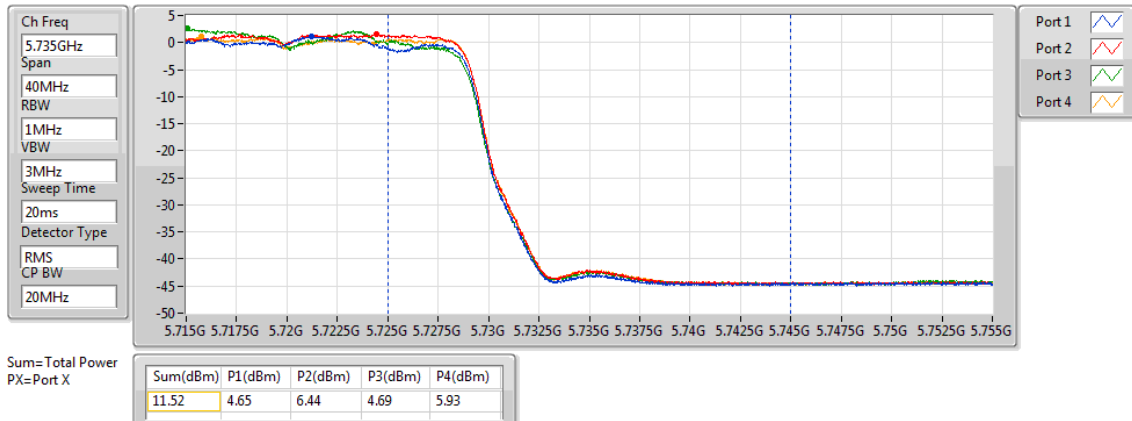

VHT40,TXBF_Nss1,(MCS0)_4TX

AV Power


5710MHz Straddle 5.725-5.85GHz

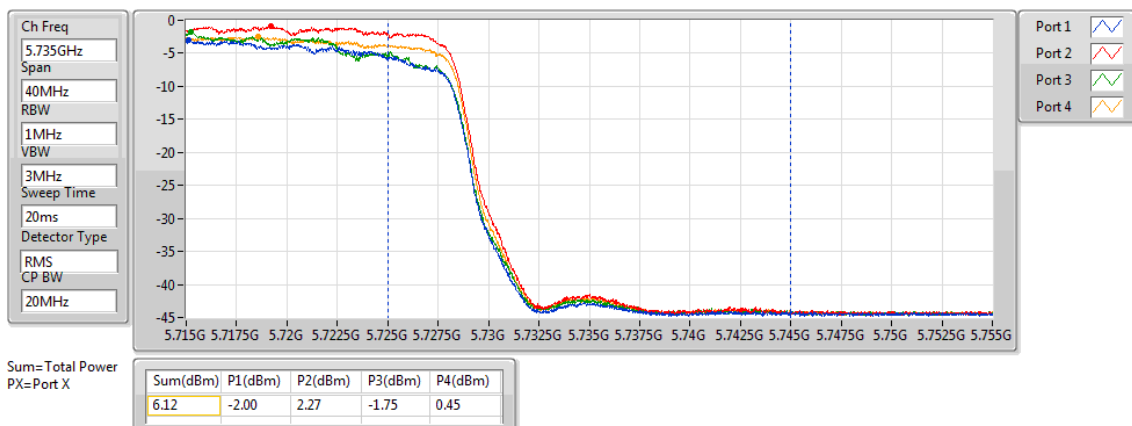

VHT80,TXBF_Nss1,(MCS0)_4TX

AV Power

5690MHz Straddle 5.725-5.85GHz

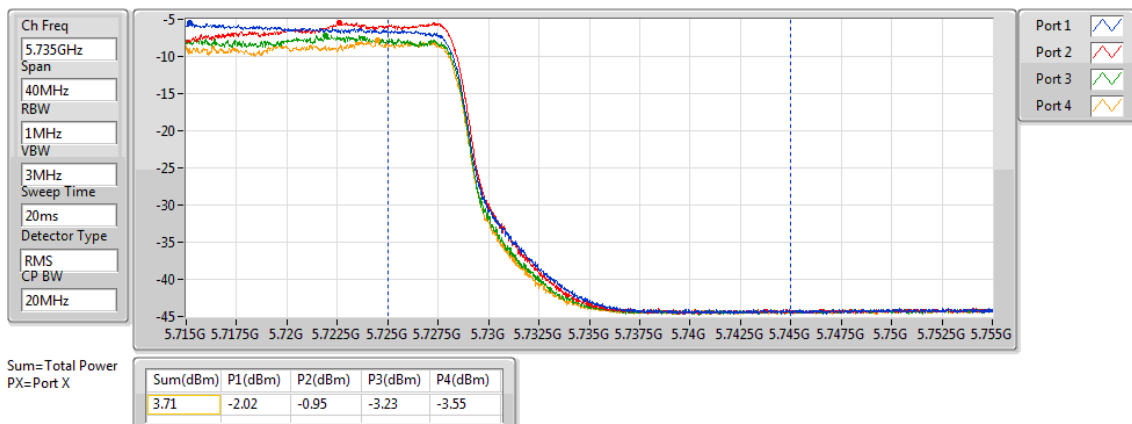



**VHT80+80
Summary**

Mode	Total Power (dBm)	Total Power (W)	EIRP (dBm)	EIRP (W)
802.11ac VHT80+80-BF_Nss1,(MCS0)_4TX	-	-	-	-
5.15-5.25GHz	19.79	0.09528	28.10	0.64565
802.11ac VHT80+80-BF_Nss1,(MCS0)_4TX	-	-	-	-
5.725-5.85GHz	21.06	0.12764	28.37	0.68707

**Result**

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)	Port 3 (dBm)	Port 4 (dBm)
802.11ac VHT80+80-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
#5210MHz,5775MHz	Pass	8.32	16.83	16.72	19.79	27.68	28.10	36.00		
802.11ac VHT80+80-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5210MHz,#5775MHz	Pass	7.31			21.06	28.69	28.37	36.00	18.07	18.03

DG = Directional Gain; **Port X** = Port X output power

**11a, VHT20, VHT40 and VHT80
Summary**

Mode	PD (dBm/RBW)	EIRP PD (dBm/RBW)
VHT20,TXBF_Nss1,(MCS0)_4TX	-	-
5.15-5.25GHz	11.78	22.62
5.725-5.85GHz	11.21	22.05
VHT40,TXBF_Nss1,(MCS0)_4TX	-	-
5.15-5.25GHz	8.54	19.38
5.725-5.85GHz	9.07	19.91
VHT80,TXBF_Nss1,(MCS0)_4TX	-	-
5.15-5.25GHz	3.65	14.49
5.725-5.85GHz	5.36	16.20

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
VHT20,TXBF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5180MHz	Pass	10.84	5.63	5.68	5.75	6.10	11.72	12.16
5200MHz	Pass	10.84	5.76	5.73	5.71	6.10	11.78	12.16
5240MHz	Pass	10.84	5.31	5.43	5.33	5.54	11.34	12.16
5745MHz	Pass	10.84	5.10	5.66	4.98	5.79	11.21	25.16
5785MHz	Pass	10.84	5.17	5.50	4.96	5.66	11.21	25.16
5825MHz	Pass	10.84	5.48	5.41	4.68	5.62	11.16	25.16
VHT40,TXBF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5190MHz	Pass	10.84	2.63	2.63	2.44	2.79	8.54	12.16
5230MHz	Pass	10.84	2.45	2.31	2.10	2.58	8.31	12.16
5755MHz	Pass	10.84	2.11	2.87	1.72	2.61	8.25	25.16
5795MHz	Pass	10.84	3.03	3.68	2.95	3.20	9.07	25.16
VHT80,TXBF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5210MHz	Pass	10.84	-2.35	-2.17	-2.06	-2.22	3.65	12.16
5775MHz	Pass	10.84	-0.80	-0.25	-0.80	-0.20	5.36	25.16


DG = Directional Gain; **RBW** = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; **Port X** = Port X power density;

VHT20,TXBF_Nss1,(MCS0)_4TX

PSD


5180MHz

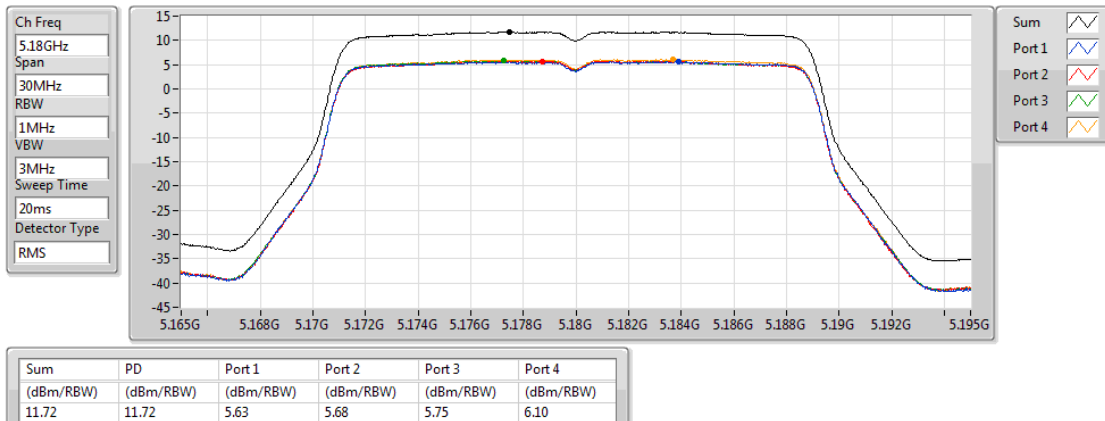

VHT20,TXBF_Nss1,(MCS0)_4TX

PSD


5200MHz

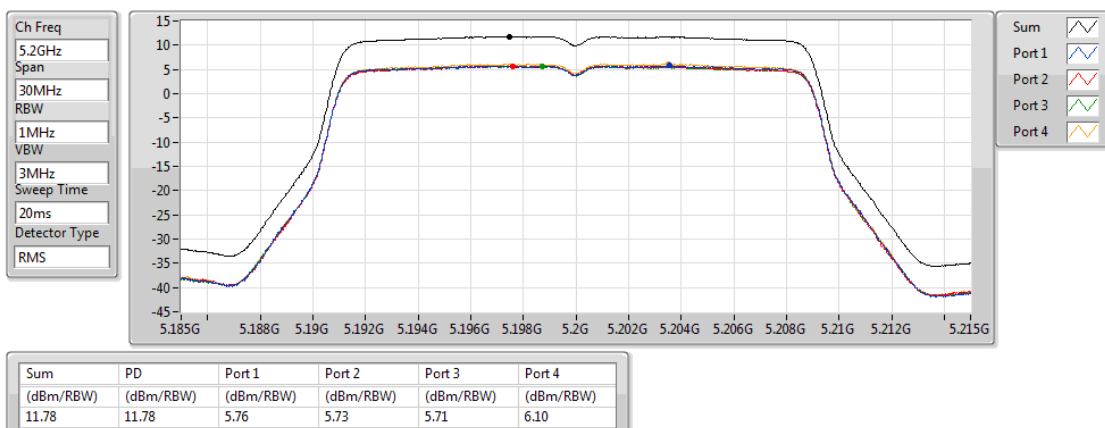

VHT20,TXBF_Nss1,(MCS0)_4TX

PSD


5240MHz

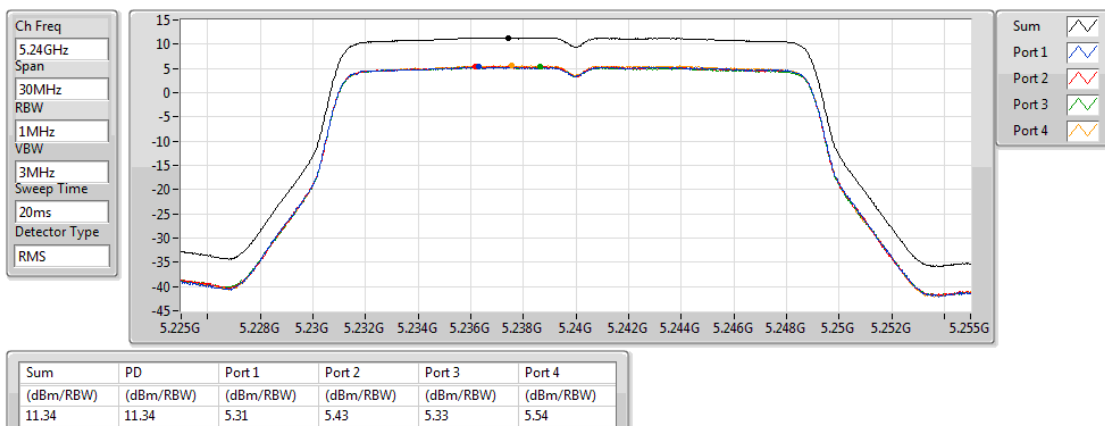

VHT20,TXBF_Nss1,(MCS0)_4TX

PSD


5745MHz

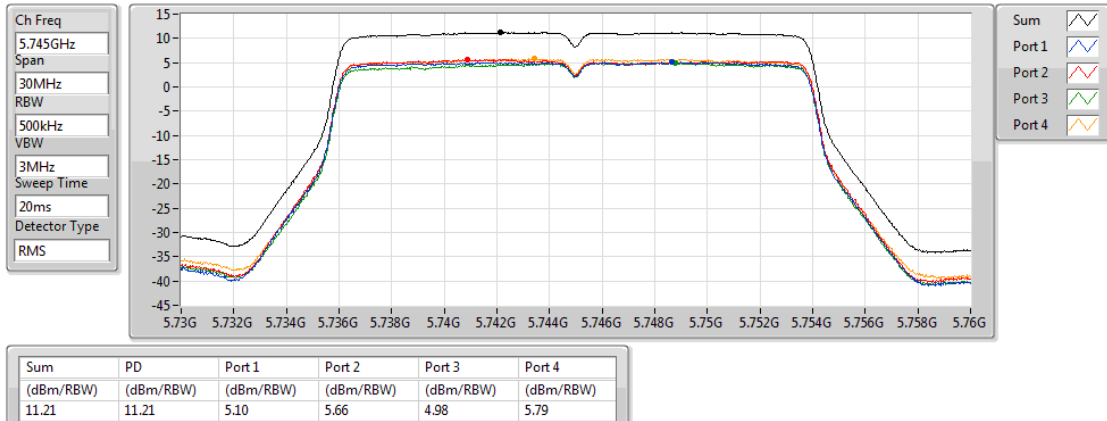

VHT20,TXBF_Nss1,(MCS0)_4TX

PSD


5785MHz

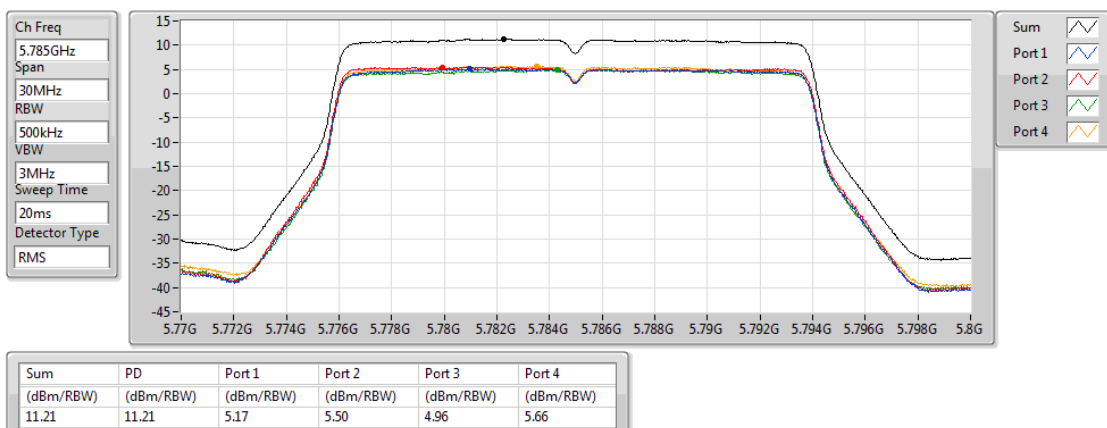

VHT20,TXBF_Nss1,(MCS0)_4TX

PSD


5825MHz

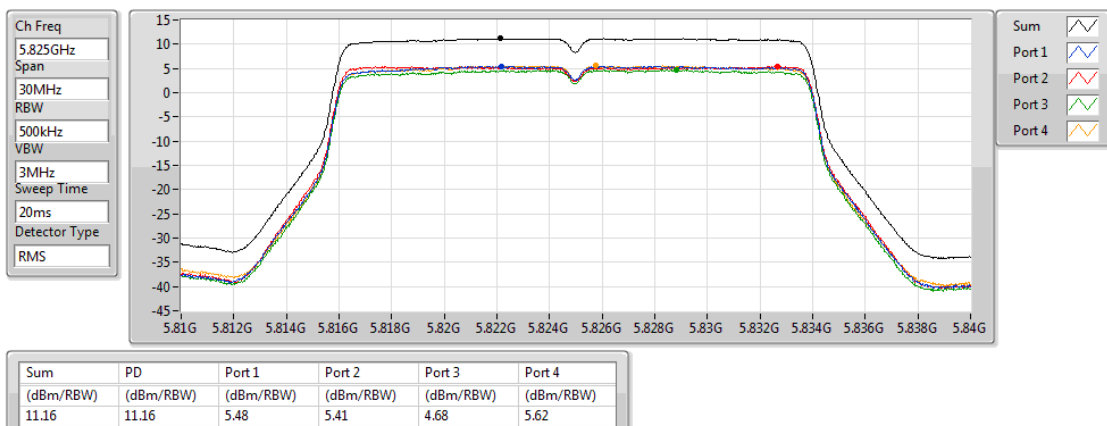

VHT40,TXBF_Nss1,(MCS0)_4TX

PSD


5190MHz

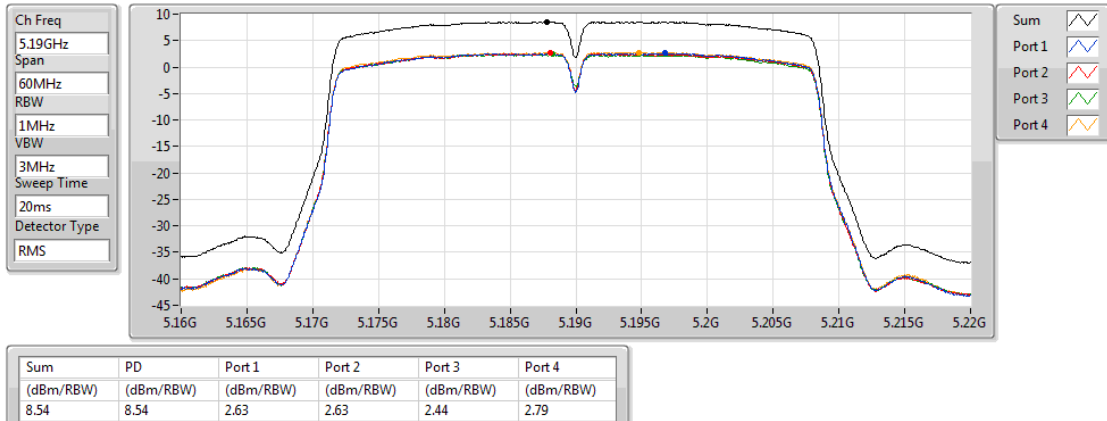

VHT40,TXBF_Nss1,(MCS0)_4TX

PSD


5230MHz

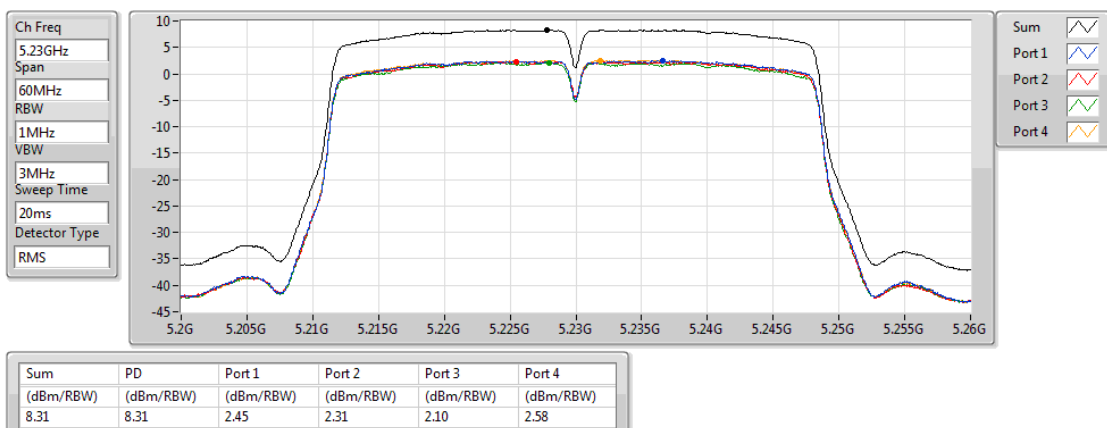

VHT40,TXBF_Nss1,(MCS0)_4TX

PSD


5755MHz

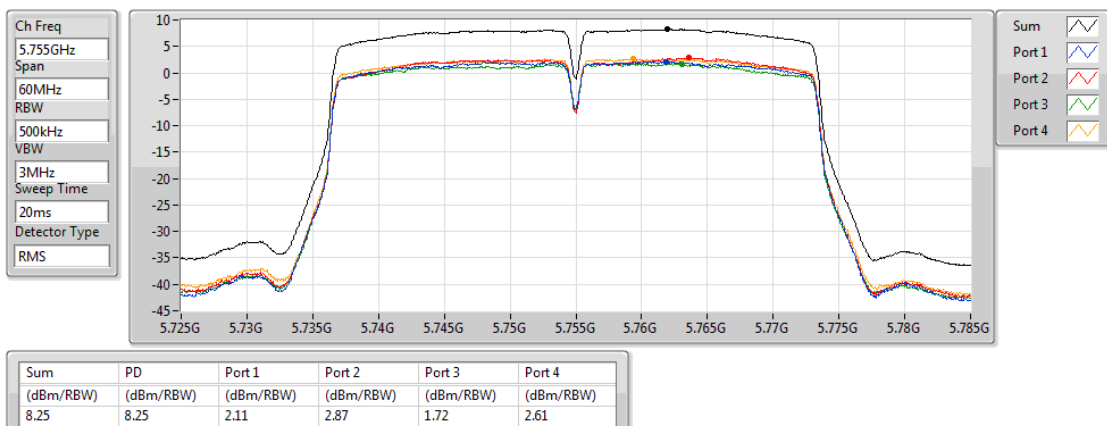

VHT40,TXBF_Nss1,(MCS0)_4TX

PSD

5795MHz

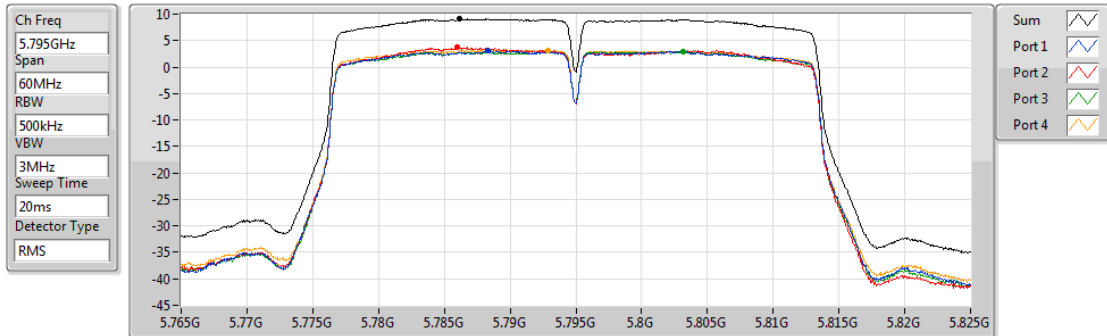


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.07	9.07	3.03	3.68	2.95	3.20

VHT80,TXBF_Nss1,(MCS0)_4TX

PSD

5210MHz

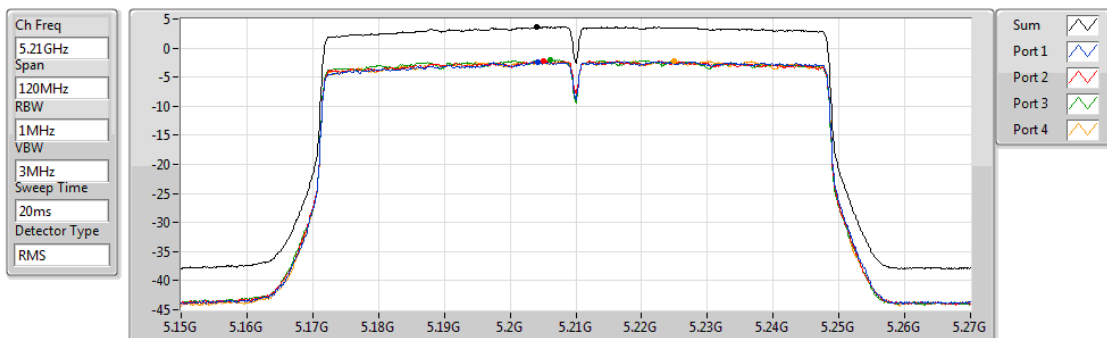


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
3.65	3.65	-2.35	-2.17	-2.06	-2.22

VHT80,TXBF_Nss1,(MCS0)_4TX

PSD

5775MHz

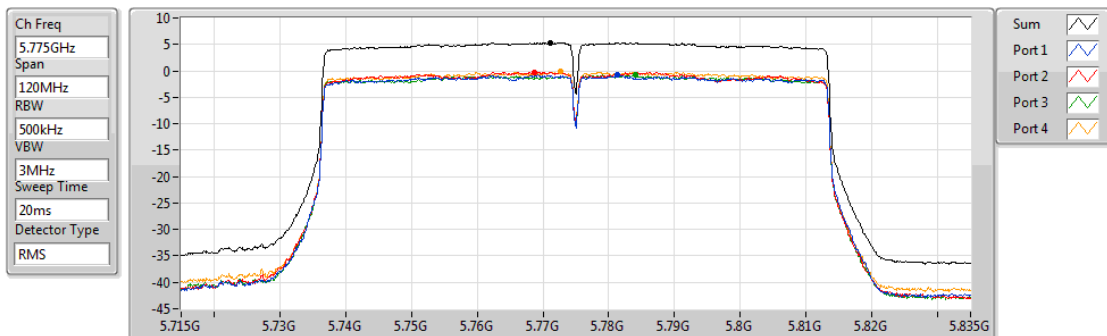

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
5.36	5.36	-0.80	-0.25	-0.80	-0.20





**VHT80+80
Summary**

Mode	PD (dBm/RBW)	EIRP PD (dBm/RBW)
802.11ac VHT80+80-BF_Nss1,(MCS0)_4TX	-	-
5.15-5.25GHz	0.47	8.79
802.11ac VHT80+80-BF_Nss1,(MCS0)_4TX	-	-
5.725-5.85GHz	0.55	7.86

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)
802.11ac VHT80+80-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
#5210MHz,5775MHz	Pass	8.32	-2.46	-2.18	0.47	14.68	8.79	Inf		
802.11ac VHT80+80-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5210MHz,#5775MHz	Pass	7.31			0.55	28.69	7.86	Inf	-1.19	-2.97


DG = Directional Gain; **RBW** = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; **Port X** = Port X power density;

802.11ac VHT80+80-BF_Nss1,(MCS0)_4TX

PSD


#5210MHz,5775MHz

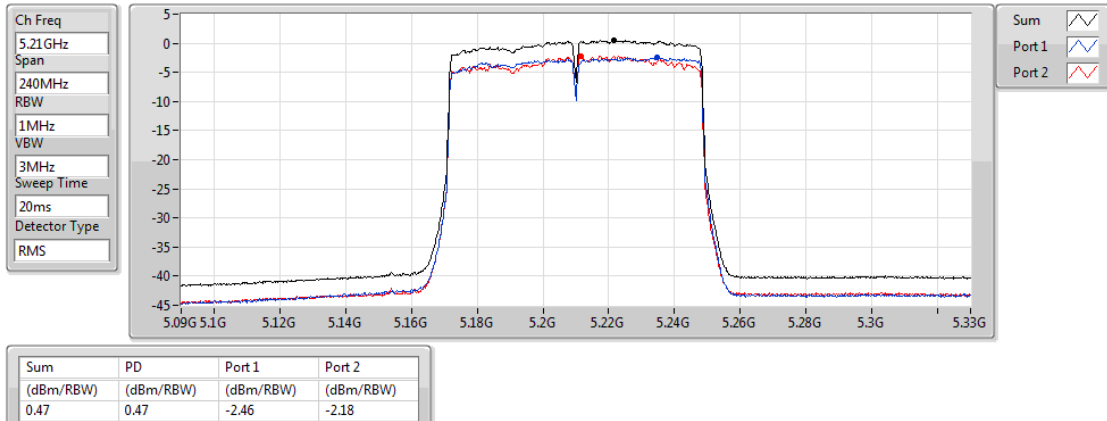



802.11ac VHT80+80-BF_Nss1,(MCS0)_4TX

PSD

5210MHz,#5775MHz

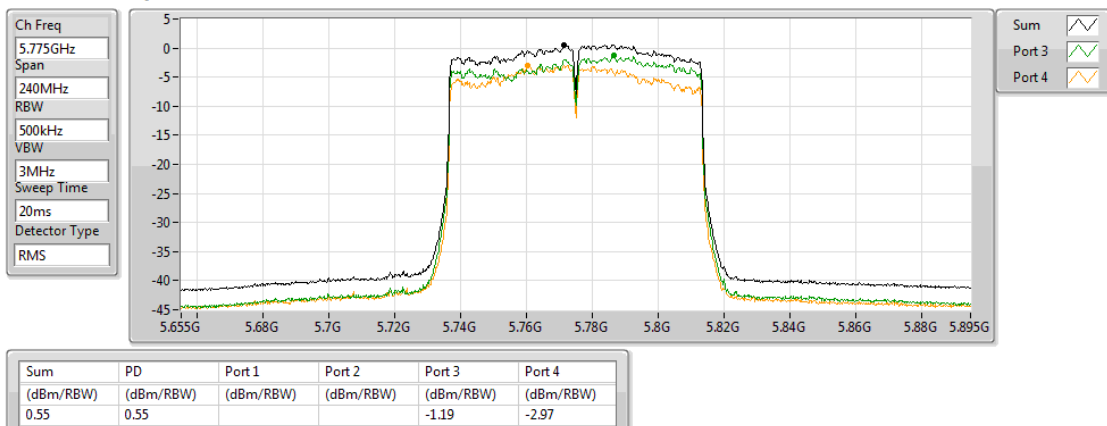

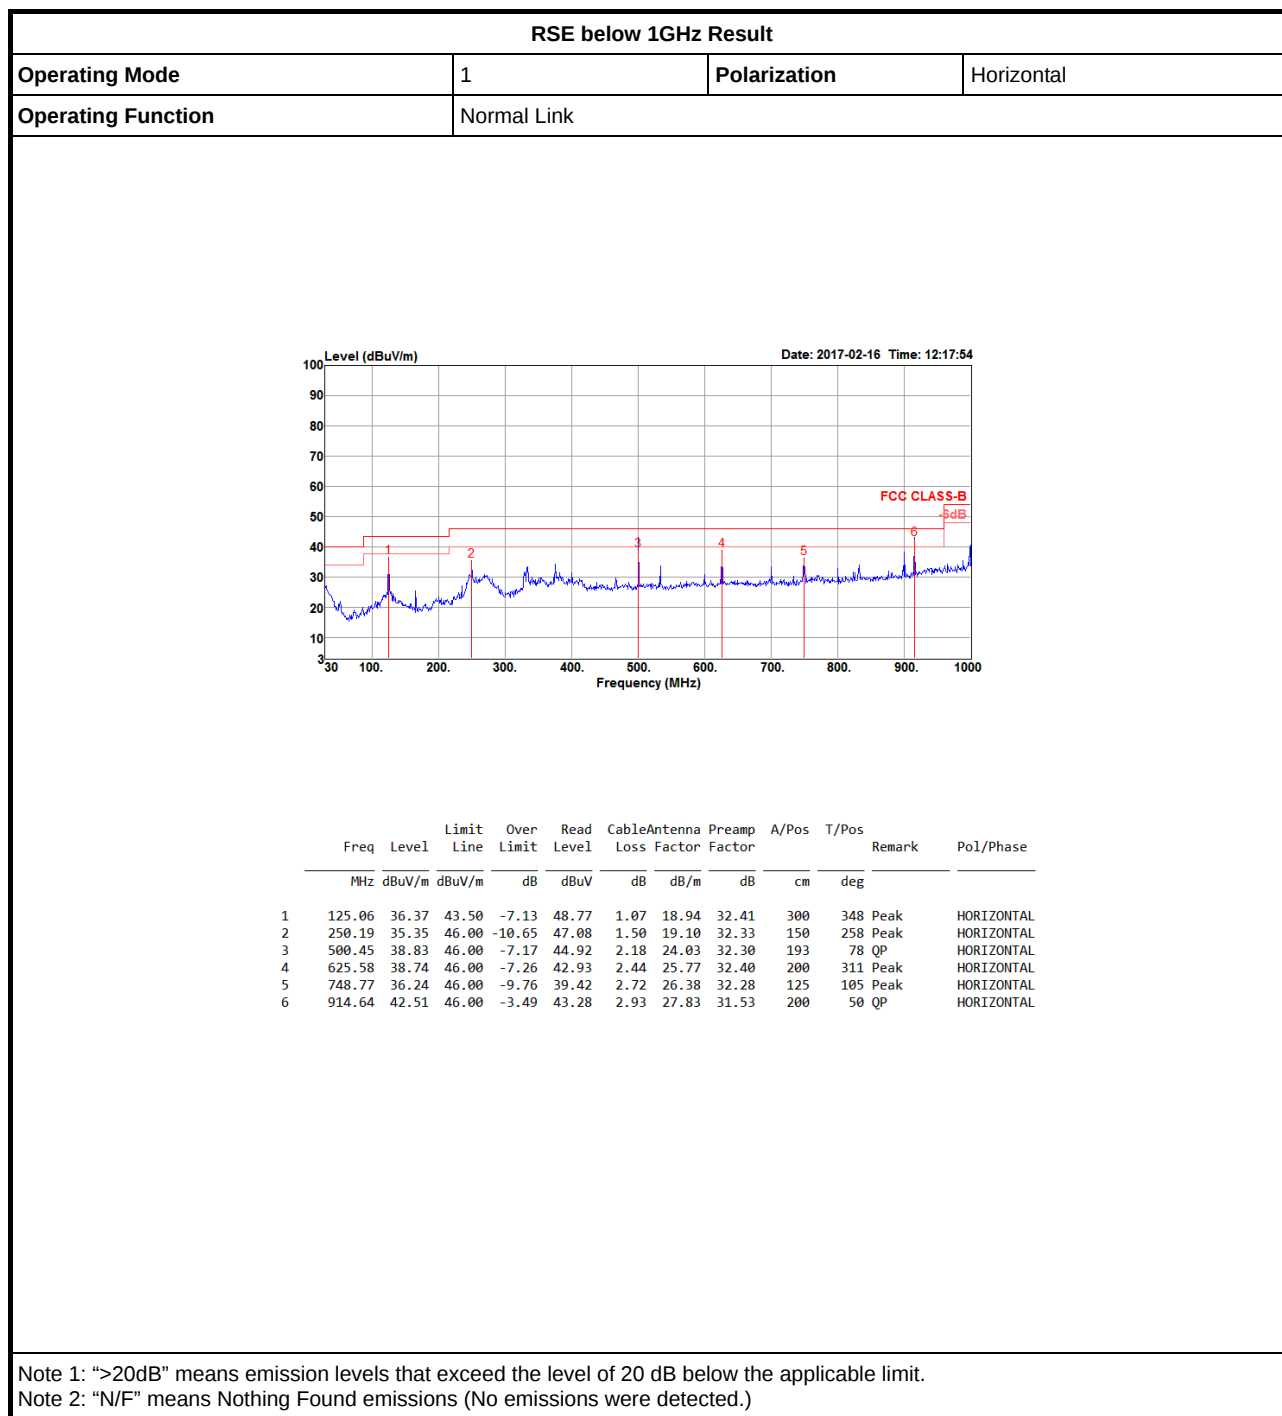

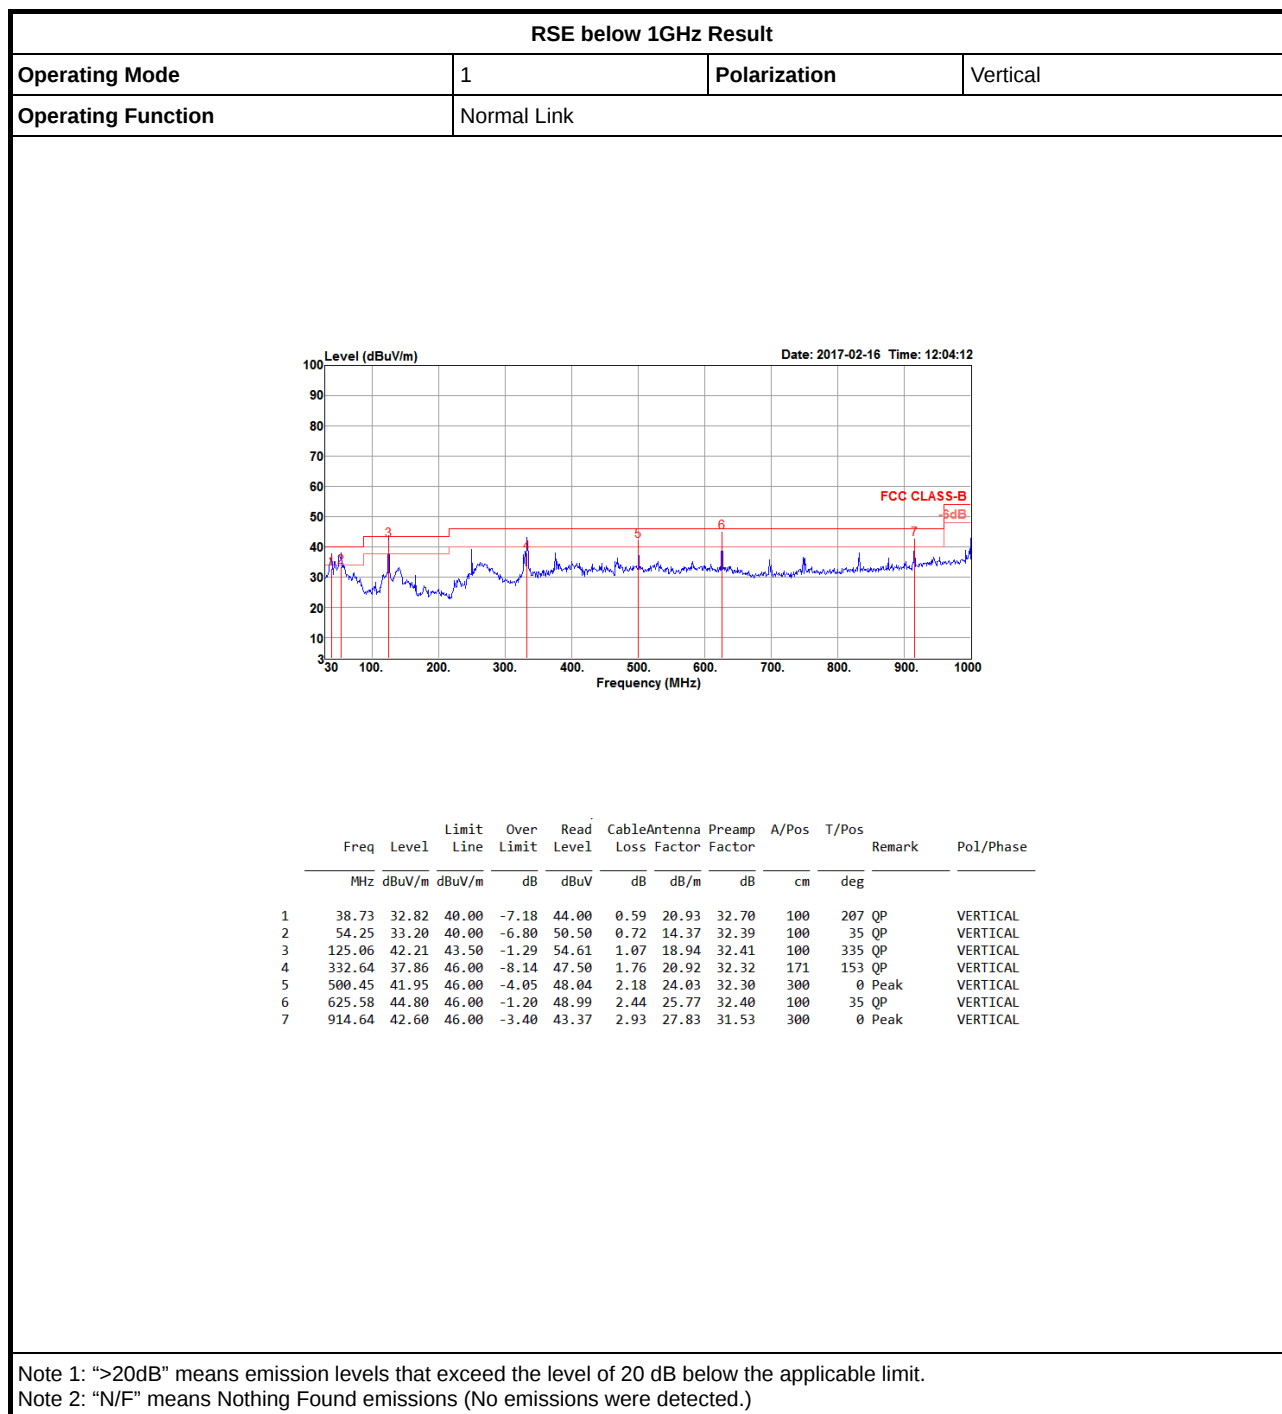


**11a, VHT20, VHT40 and VHT80****Summary**

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Pol. (H/V)	Azimuth (°)	Height (m)	Comments
VHT80, TXBF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-	-	-
5.725-5.85GHz	Pass	PK	5.648G	67.96	68.20	-0.24	9.79	3	V	188	1.27	-

VHT20,TXBF_Nss1,(MCS0)_4TX

5180MHz_TX

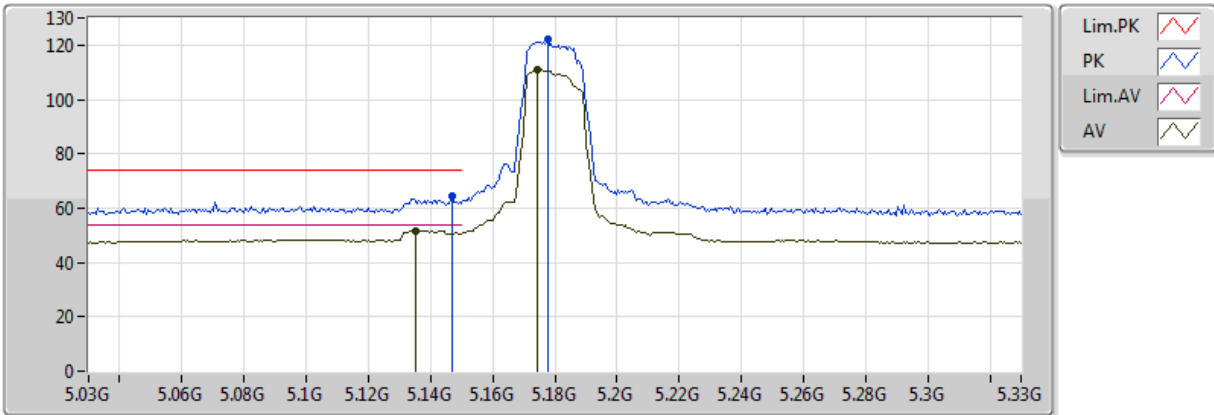


20170221
EUT Y 4TX TXBF
Setting 30 Maxsetting
03-M-01-10
FSP

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	5.135G	51.78	54.00	-2.22	8.89	3	V	197	1.26	-
AV	5.1746G	110.99	Inf	-Inf	8.99	3	V	197	1.26	-
PK	5.147G	64.38	74.00	-9.62	8.92	3	V	197	1.26	-
PK	5.1776G	122.22	Inf	-Inf	9.00	3	V	197	1.26	-

VHT20,TXBF_Nss1,(MCS0)_4TX

5180MHz_TX

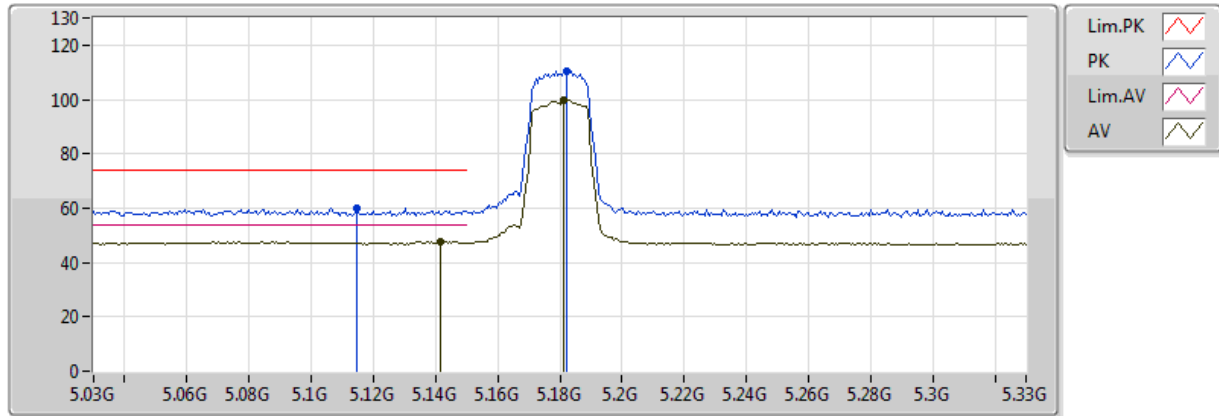


20170221
EUT Y 4TX TXBF
Setting 30 Maxsetting
03-M-01-10
FSP

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	5.1416G	47.55	54.00	-6.45	8.91	3	H	244	2.04	-
AV	5.1812G	99.66	Inf	-Inf	9.01	3	H	244	2.04	-
PK	5.1146G	60.07	74.00	-13.93	8.84	3	H	244	2.04	-
PK	5.1824G	110.62	Inf	-Inf	9.01	3	H	244	2.04	-

VHT20,TXBF_Nss1,(MCS0)_4TX

5180MHz_TX

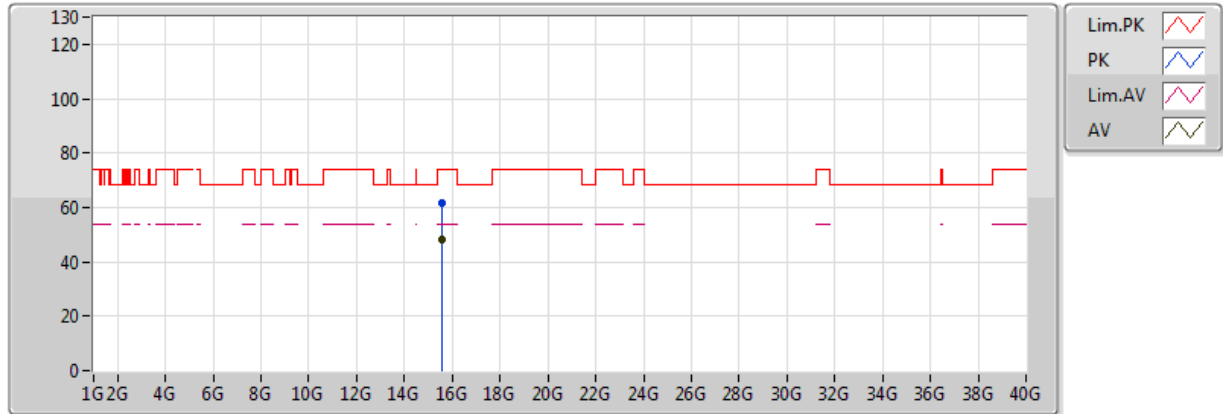


20170221
EUT Y 4TX TXBF
Setting 30 Maxsetting
03-M-01
FSP

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	15.540488G	48.44	54.00	-5.56	18.11	3	V	304	1.21	-
PK	15.540996G	61.49	74.00	-12.51	18.11	3	V	304	1.21	-

VHT20,TXBF_Nss1,(MCS0)_4TX

5180MHz_TX

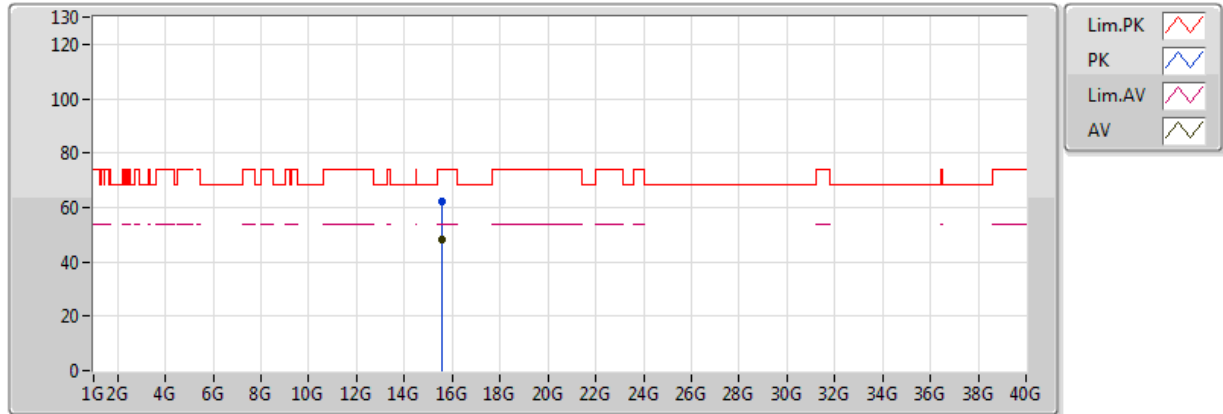


20170221
EUT Y 4TX TXBF
Setting 30 Maxsetting
03-M-01
FSP

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	15.540584G	48.21	54.00	-5.79	18.11	3	H	248	1.50	-
PK	15.539748G	62.22	74.00	-11.78	18.11	3	H	248	1.50	-

VHT20,TXBF_Nss1,(MCS0)_4TX

5200MHz_TX

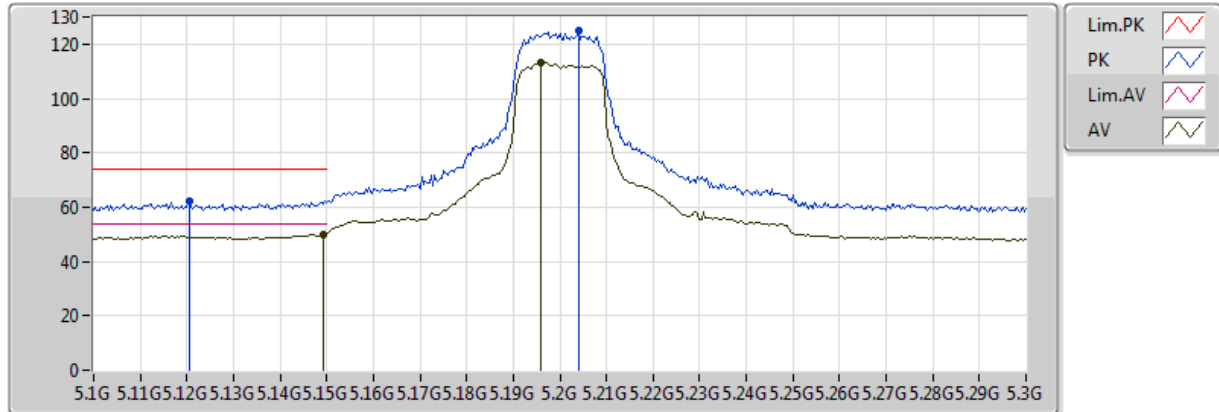


20170221
EUT Y 4TX TXBF
Setting 30 Maxsetting
03-M-01-10
FSP

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	5.1492G	50.10	54.00	-3.90	8.93	3	V	174	1.50	-
AV	5.196G	113.36	Inf	-Inf	9.05	3	V	174	1.50	-
PK	5.1204G	62.45	74.00	-11.55	8.85	3	V	174	1.50	-
PK	5.204G	125.22	Inf	-Inf	9.07	3	V	174	1.50	-

VHT20,TXBF_Nss1,(MCS0)_4TX

5200MHz_TX

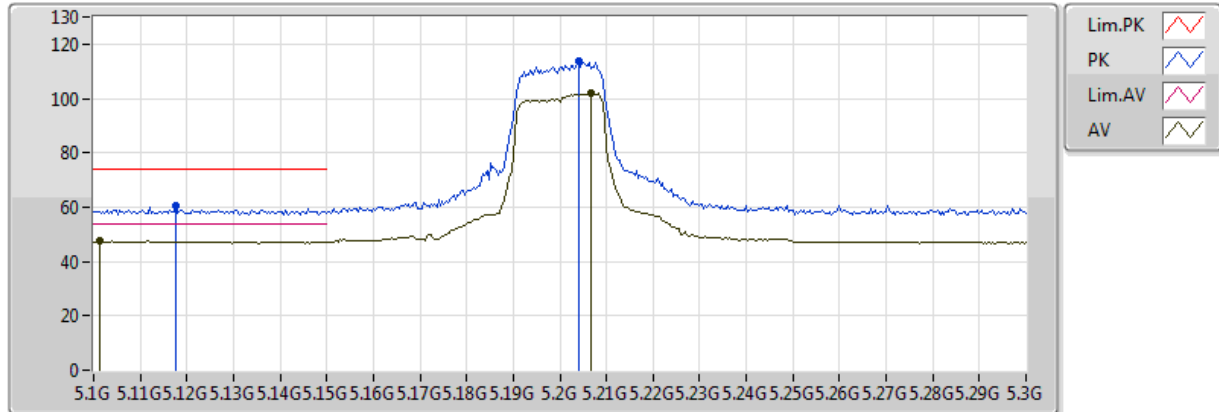


20170221
EUT Y 4TX TXBF
Setting 30 Maxsetting
03-M-01-10
FSP

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	5.1012G	47.51	54.00	-6.49	8.80	3	H	246	1.53	-
AV	5.2068G	102.09	Inf	-Inf	9.07	3	H	246	1.53	-
PK	5.1176G	60.42	74.00	-13.58	8.85	3	H	246	1.53	-
PK	5.204G	113.79	Inf	-Inf	9.07	3	H	246	1.53	-

VHT20,TXBF_Nss1,(MCS0)_4TX

5200MHz_TX

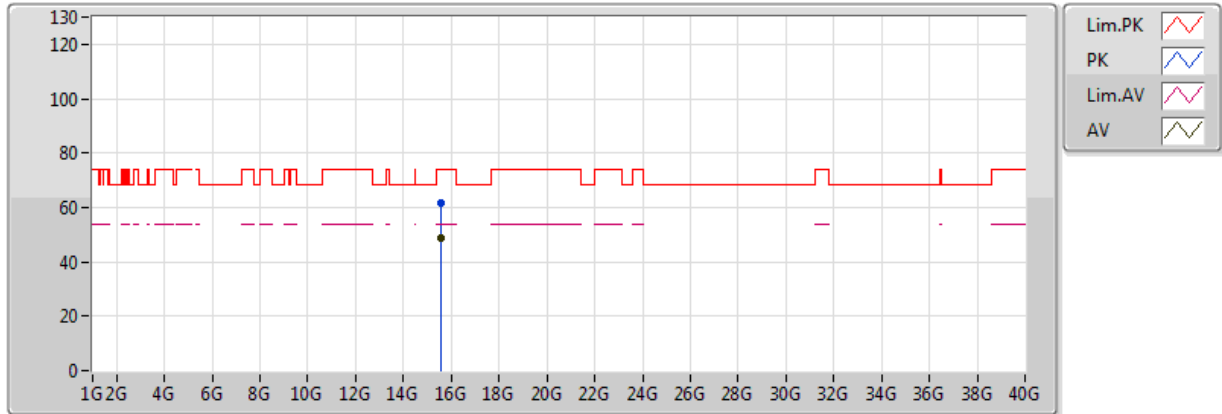


20170221
EUT Y 4TX TXBF
Setting 30 Maxsetting
03-M-01
FSP

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	15.600016G	48.75	54.00	-5.25	17.96	3	V	105	1.50	-
PK	15.599632G	61.81	74.00	-12.19	17.96	3	V	105	1.50	-

VHT20,TXBF_Nss1,(MCS0)_4TX

5200MHz_TX

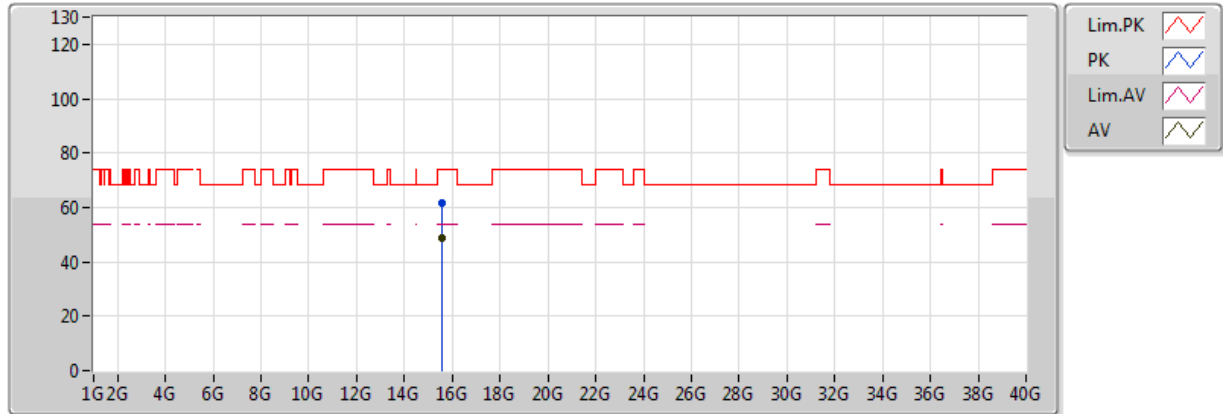


20170221
EUT Y 4TX TXBF
Setting 30 Maxsetting
03-M-01
FSP

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	15.600228G	48.72	54.00	-5.28	17.96	3	H	283	1.50	-
PK	15.599204G	61.84	74.00	-12.16	17.96	3	H	283	1.50	-

VHT20,TXBF_Nss1,(MCS0)_4TX

5240MHz_TX

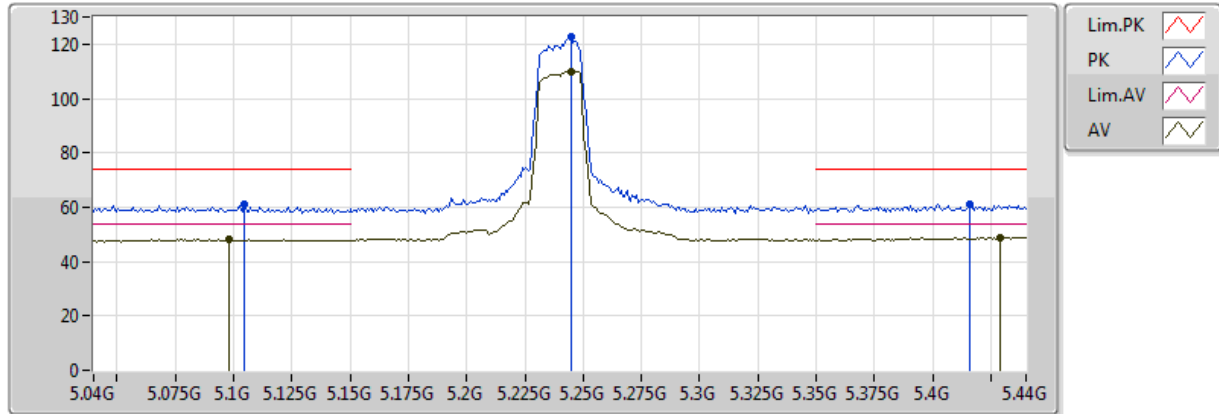


20170221
EUT Y 4TX TXBF
Setting 30 Maxsetting
03-M-01-10
FSP

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	5.0984G	48.17	54.00	-5.83	8.80	3	V	184	1.50	-
AV	5.2448G	110.03	Inf	-Inf	9.15	3	V	184	1.50	-
AV	5.4288G	48.93	54.00	-5.07	9.50	3	V	184	1.50	-
PK	5.1048G	61.30	74.00	-12.70	8.81	3	V	184	1.50	-
PK	5.2448G	122.54	Inf	-Inf	9.15	3	V	184	1.50	-
PK	5.416G	61.12	74.00	-12.88	9.47	3	V	184	1.50	-

VHT20,TXBF_Nss1,(MCS0)_4TX

5240MHz_TX

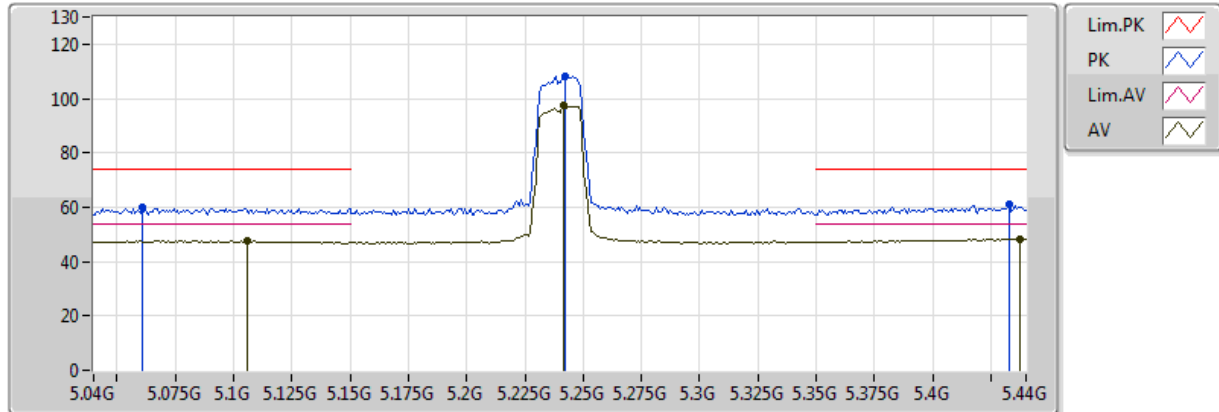


20170221
EUT Y 4TX TXBF
Setting 30 Maxsetting
03-M-01-10
FSP

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	5.1056G	47.53	54.00	-6.47	8.81	3	H	235	2.50	-
AV	5.2416G	97.27	Inf	-Inf	9.14	3	H	235	2.50	-
AV	5.4376G	48.42	54.00	-5.58	9.53	3	H	235	2.50	-
PK	5.0608G	60.19	74.00	-13.81	8.69	3	H	235	2.50	-
PK	5.2424G	108.22	Inf	-Inf	9.14	3	H	235	2.50	-
PK	5.4328G	60.98	74.00	-13.02	9.52	3	H	235	2.50	-

VHT20,TXBF_Nss1,(MCS0)_4TX

5240MHz_TX

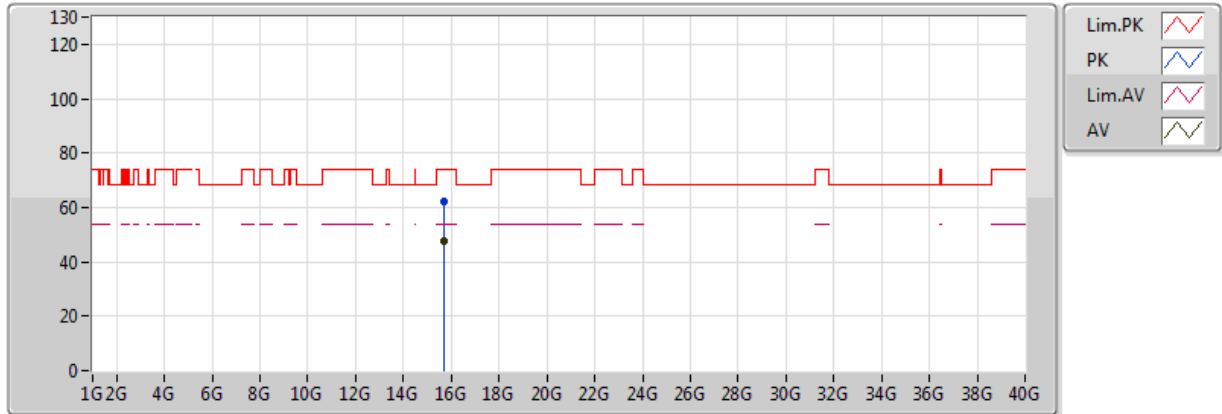


20170221
EUT Y 4TX TXBF
Setting 30 Maxsetting
03-M-01
FSP

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	15.7195G	47.67	54.00	-6.33	17.65	3	V	6	2.34	-
PK	15.71972G	62.09	74.00	-11.91	17.65	3	V	6	2.34	-

VHT20,TXBF_Nss1,(MCS0)_4TX

5240MHz_TX

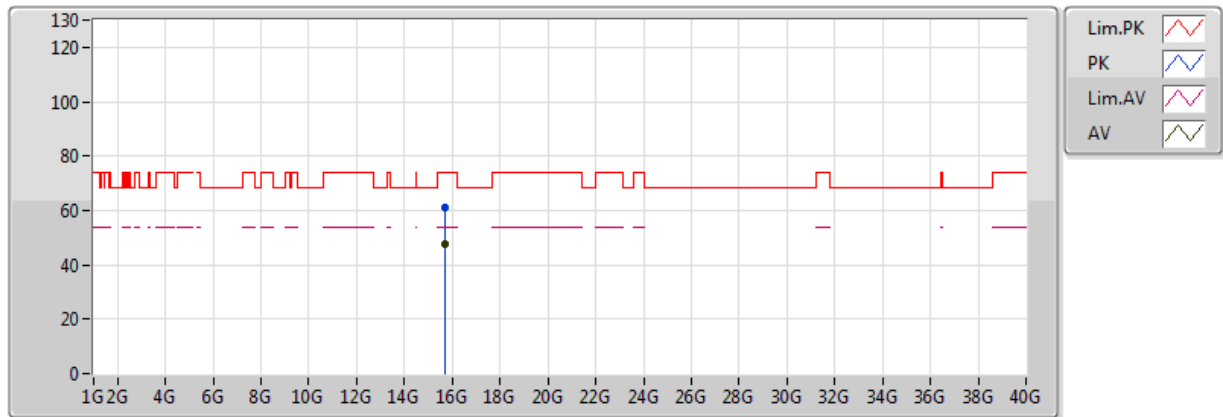


20170221
EUT Y 4TX TXBF
Setting 30 Maxsetting
03-M-01
FSP

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	15.719332G	47.42	54.00	-6.58	17.65	3	H	264	1.47	-
PK	15.7194G	60.84	74.00	-13.16	17.65	3	H	264	1.47	-

VHT20,TXBF_Nss1,(MCS0)_4TX

5745MHz_TX

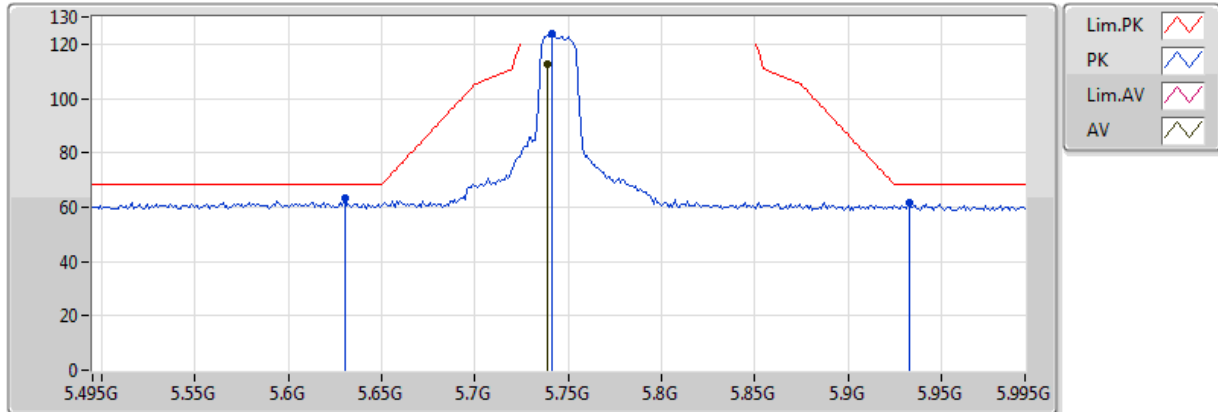


20170221
EUT Y 4TX TXBF
Setting 30 Maxsetting
03-M-01-10
FSP

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	5.739G	112.42	Inf	-Inf	9.81	3	V	199	1.32	-
PK	5.63G	63.05	68.20	-5.15	9.79	3	V	199	1.32	-
PK	5.741G	123.94	Inf	-Inf	9.81	3	V	199	1.32	-
PK	5.933G	61.39	68.20	-6.81	10.01	3	V	199	1.32	-

VHT20,TXBF_Nss1,(MCS0)_4TX

5745MHz_TX

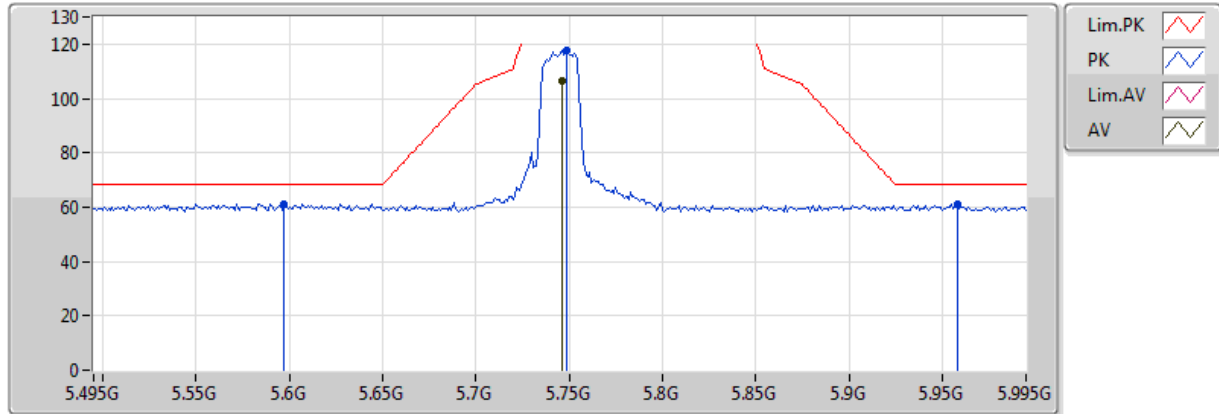


20170221
EUT Y 4TX TXBF
Setting 30 Maxsetting
03-M-01-10
FSP

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	5.746G	106.52	Inf	-Inf	9.81	3	H	235	1.69	-
PK	5.597G	61.26	68.20	-6.94	9.78	3	H	235	1.69	-
PK	5.749G	117.92	Inf	-Inf	9.81	3	H	235	1.69	-
PK	5.958G	61.34	68.20	-6.86	10.04	3	H	235	1.69	-

VHT20,TXBF_Nss1,(MCS0)_4TX

5745MHz_TX

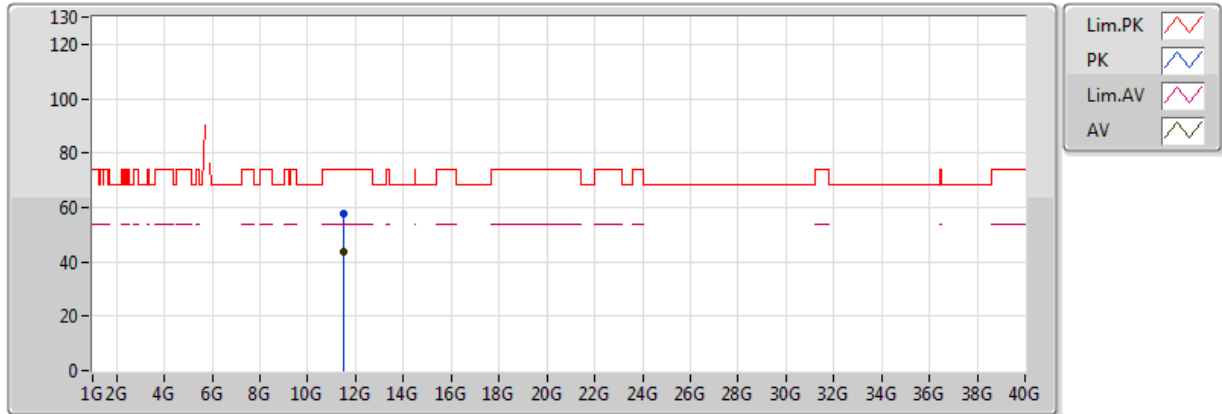


20170221
EUT Y 4TX TXBF
Setting 30 Maxsetting
03-M-01
FSP

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	11.4903G	43.96	54.00	-10.04	16.32	3	V	55	1.65	-
PK	11.490896G	57.46	74.00	-16.54	16.32	3	V	55	1.65	-

VHT20,TXBF_Nss1,(MCS0)_4TX

5745MHz_TX

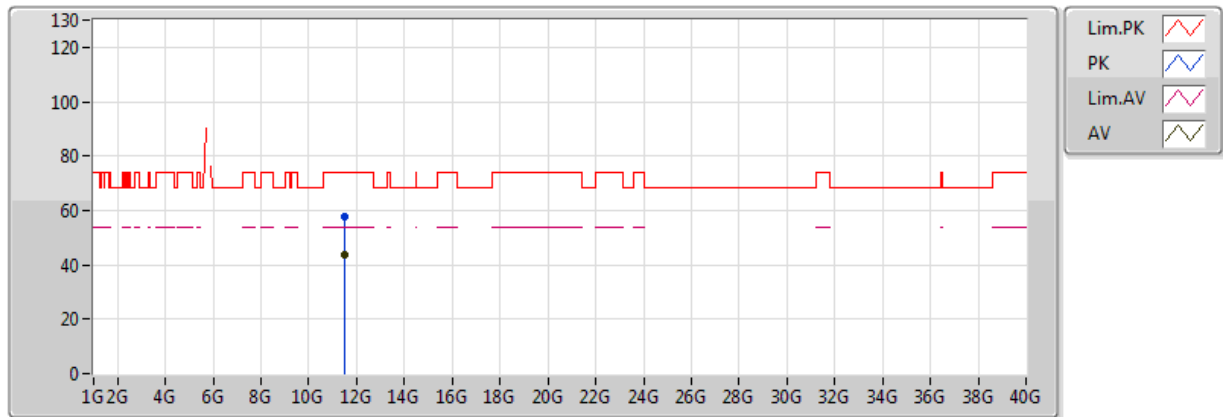


20170221
EUT Y 4TX TXBF
Setting 30 Maxsetting
03-M-01
FSP

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	11.489888G	43.91	54.00	-10.09	16.31	3	H	132	1.95	-
PK	11.489112G	57.59	74.00	-16.41	16.31	3	H	132	1.95	-

VHT20,TXBF_Nss1,(MCS0)_4TX

5785MHz_TX

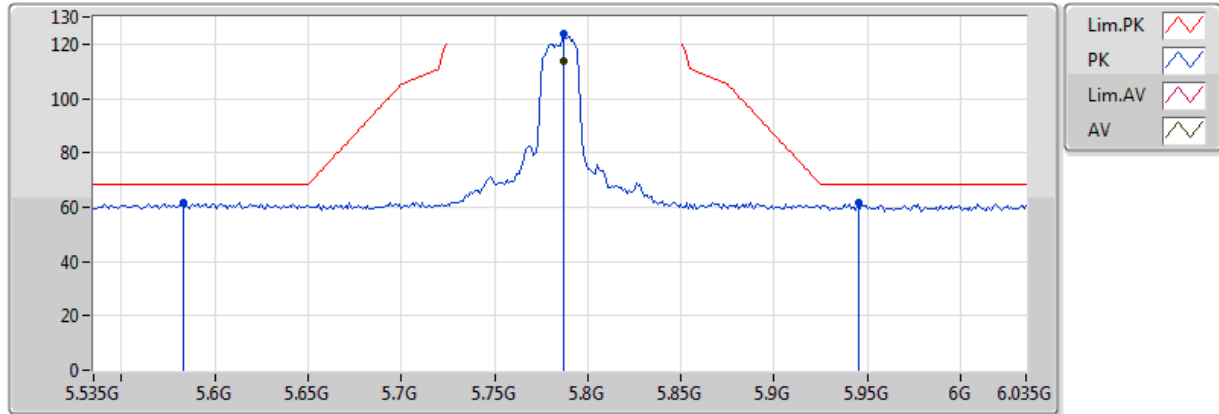


20170221
EUT Y 4TX TXBF
Setting 30 Maxsetting
03-M-01-10
FSP

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	5.787G	113.68	Inf	-Inf	9.82	3	V	194	1.35	-
PK	5.583G	61.56	68.20	-6.64	9.76	3	V	194	1.35	-
PK	5.787G	123.57	Inf	-Inf	9.82	3	V	194	1.35	-
PK	5.945G	61.66	68.20	-6.54	10.02	3	V	194	1.35	-

VHT20,TXBF_Nss1,(MCS0)_4TX

5785MHz_TX

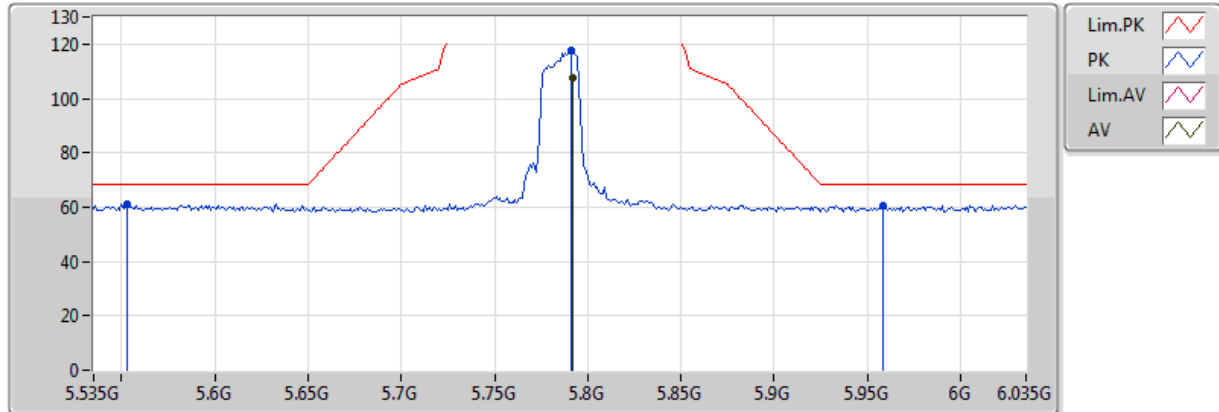


20170221
EUT Y 4TX TXBF
Setting 30 Maxsetting
03-M-01-10
FSP

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	5.792G	107.35	Inf	-Inf	9.82	3	H	221	1.86	-
PK	5.553G	61.03	68.20	-7.17	9.74	3	H	221	1.86	-
PK	5.791G	117.62	Inf	-Inf	9.82	3	H	221	1.86	-
PK	5.958G	60.44	68.20	-7.76	10.04	3	H	221	1.86	-

VHT20,TXBF_Nss1,(MCS0)_4TX

5785MHz_TX

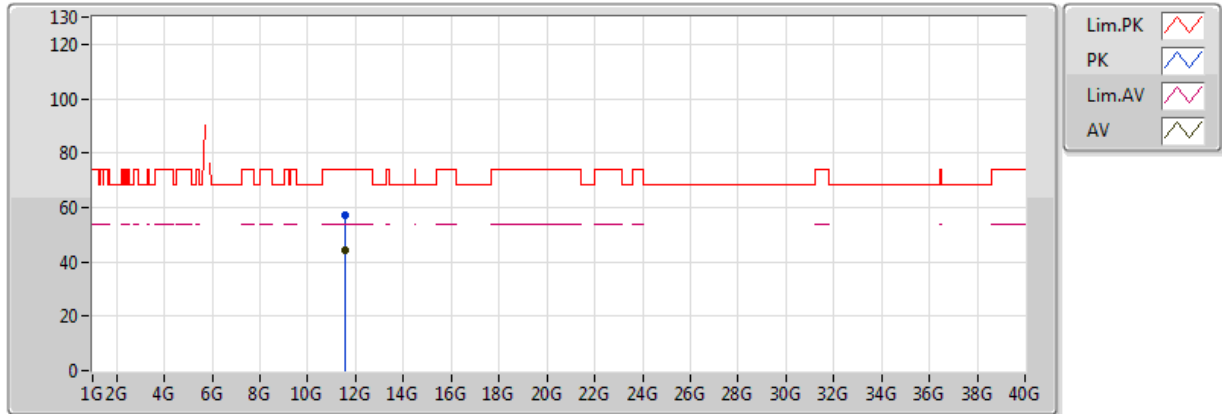


20170221
EUT Y 4TX TXBF
Setting 30 Maxsetting
03-M-01
FSP

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	11.570356G	44.08	54.00	-9.92	16.39	3	V	122	1.99	-
PK	11.569828G	57.36	74.00	-16.64	16.39	3	V	122	1.99	-

VHT20,TXBF_Nss1,(MCS0)_4TX

5785MHz_TX

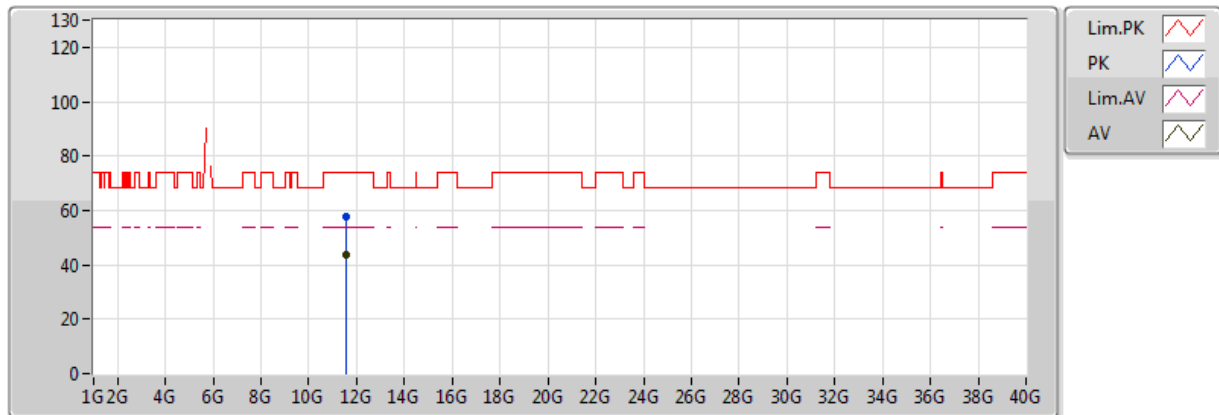


20170221
EUT Y 4TX TXBF
Setting 30 Maxsetting
03-M-01
FSP

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	11.570276G	43.90	54.00	-10.10	16.39	3	H	353	1.89	-
PK	11.570392G	57.50	74.00	-16.50	16.39	3	H	353	1.89	-

VHT20,TXBF_Nss1,(MCS0)_4TX

5825MHz_TX

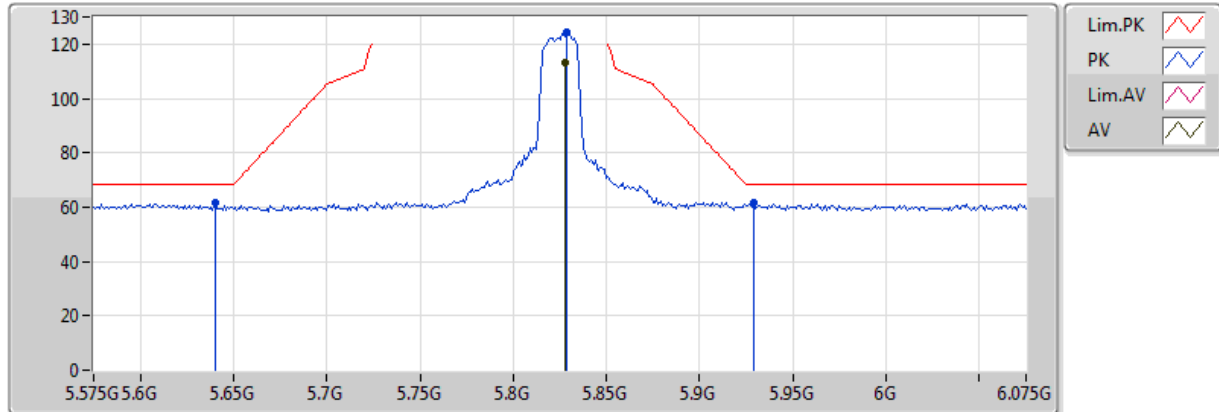


20170221
EUT Y 4TX TXBF
Setting 30 Maxsetting
03-M-01-10
FSP

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	5.828G	113.12	Inf	-Inf	9.86	3	V	186	1.51	-
PK	5.64G	61.72	68.20	-6.48	9.79	3	V	186	1.51	-
PK	5.829G	124.26	Inf	-Inf	9.86	3	V	186	1.51	-
PK	5.929G	61.44	68.20	-6.76	10.00	3	V	186	1.51	-

VHT20,TXBF_Nss1,(MCS0)_4TX

5825MHz_TX

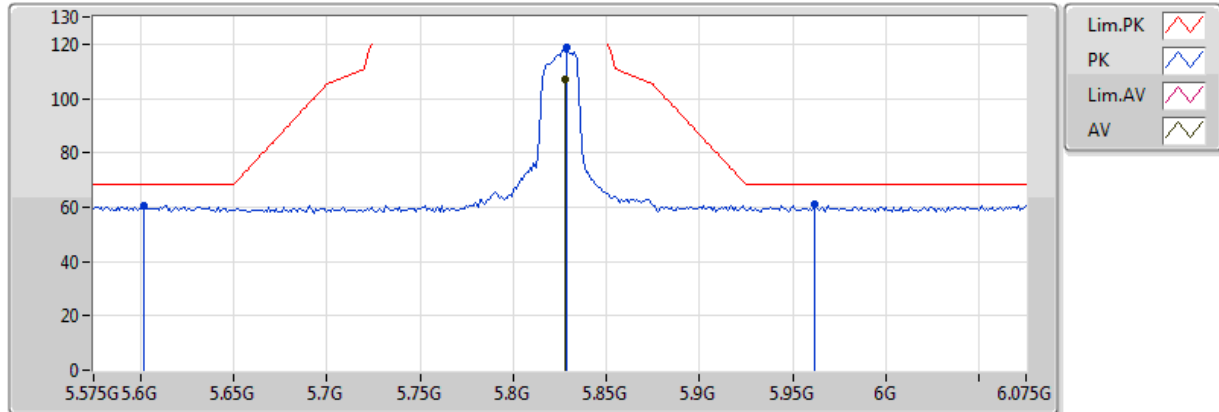


20170221
EUT Y 4TX TXBF
Setting 30 Maxsetting
03-M-01-10
FSP

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	5.828G	107.01	Inf	-Inf	9.86	3	H	225	1.97	-
PK	5.602G	60.60	68.20	-7.60	9.78	3	H	225	1.97	-
PK	5.829G	118.65	Inf	-Inf	9.86	3	H	225	1.97	-
PK	5.962G	60.92	68.20	-7.28	10.05	3	H	225	1.97	-

VHT20,TXBF_Nss1,(MCS0)_4TX

5825MHz_TX

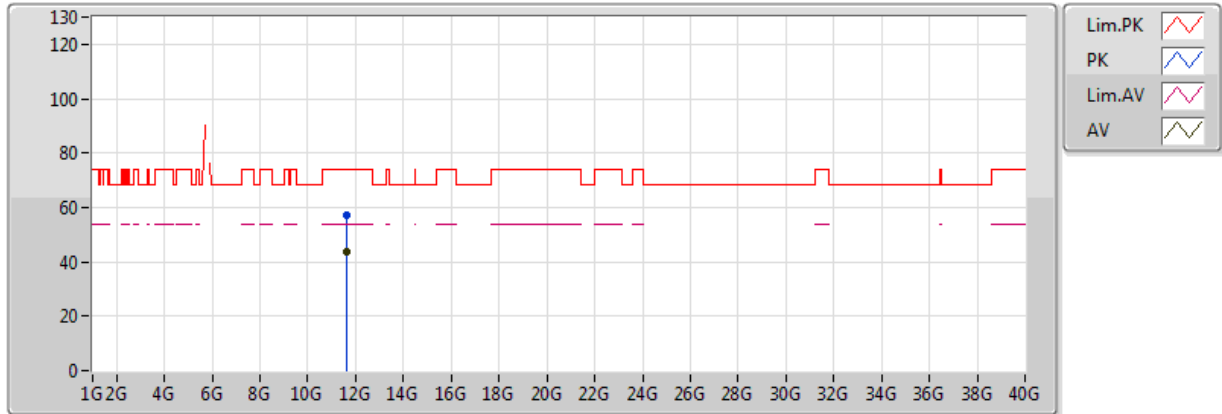


20170221
EUT Y 4TX TXBF
Setting 30 Maxsetting
03-M-01
FSP

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	11.650096G	43.92	54.00	-10.08	16.47	3	V	94	2.34	-
PK	11.65018G	57.00	74.00	-17.00	16.47	3	V	94	2.34	-

VHT20,TXBF_Nss1,(MCS0)_4TX

5825MHz_TX

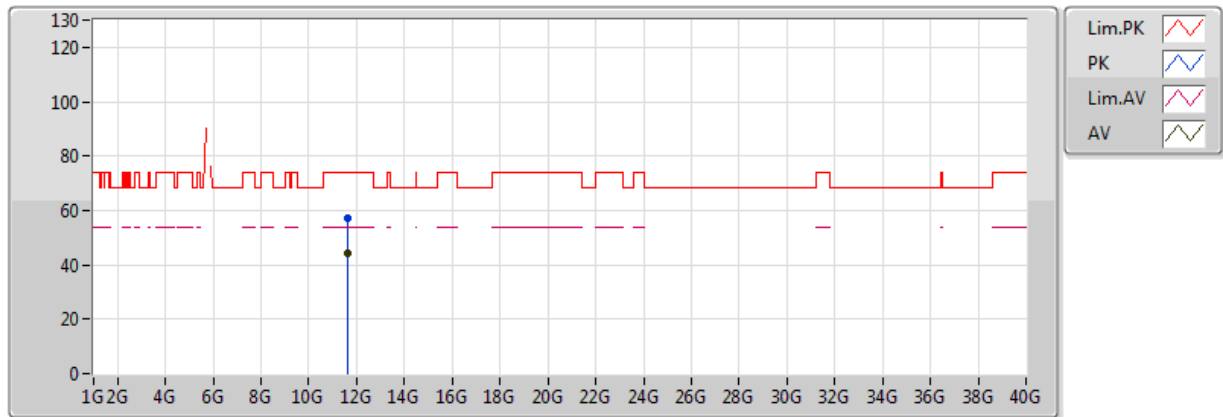


20170221
EUT Y 4TX TXBF
Setting 30 Maxsetting
03-M-01
FSP

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	11.649116G	44.05	54.00	-9.95	16.47	3	H	99	1.79	-
PK	11.64976G	57.29	74.00	-16.71	16.47	3	H	99	1.79	-

VHT40, TXBF_Nss1,(MCS0)_4TX

5190MHz_TX

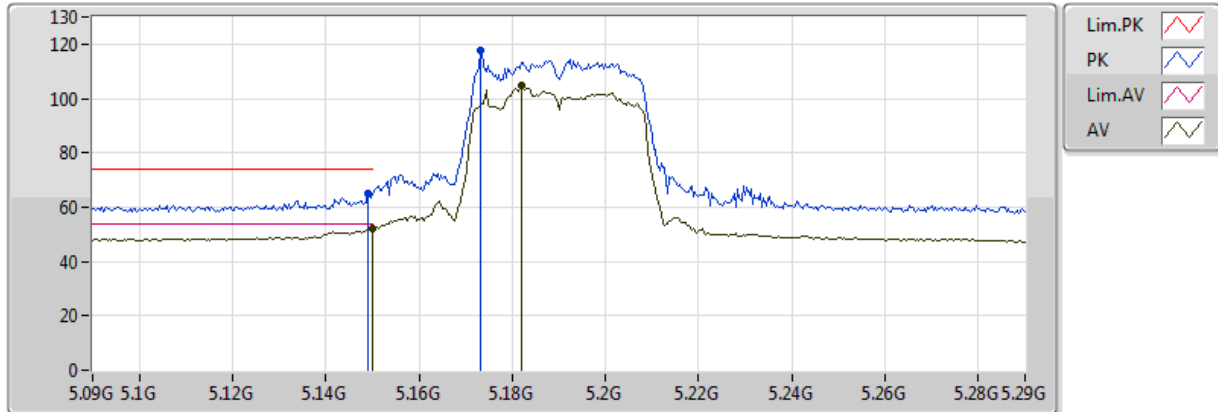


20170221
EUT Y 4TX TXBF
Setting 30 Maxsetting
03-M-01-10
FSP

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	5.149995G	51.96	54.00	-2.04	8.93	3	V	198	2.13	-
AV	5.182G	104.54	Inf	-Inf	9.01	3	V	198	2.13	-
PK	5.1492G	64.84	74.00	-9.16	8.93	3	V	198	2.13	-
PK	5.1732G	117.93	Inf	-Inf	8.99	3	V	198	2.13	-

VHT40, TXBF_Nss1,(MCS0)_4TX

5190MHz_TX

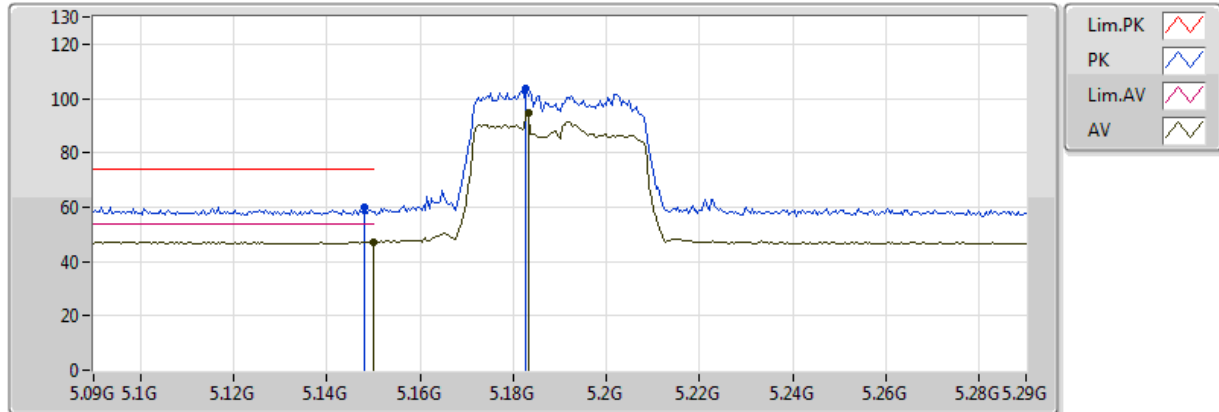


20170221
EUT Y 4TX TXBF
Setting 30 Maxsetting
03-M-01-10
FSP

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	5.149995G	47.14	54.00	-6.86	8.93	3	H	212	2.73	-
AV	5.1832G	94.71	Inf	-Inf	9.02	3	H	212	2.73	-
PK	5.148G	59.94	74.00	-14.06	8.92	3	H	212	2.73	-
PK	5.1828G	103.76	Inf	-Inf	9.02	3	H	212	2.73	-

VHT40,TXBF_Nss1,(MCS0)_4TX

5190MHz_TX

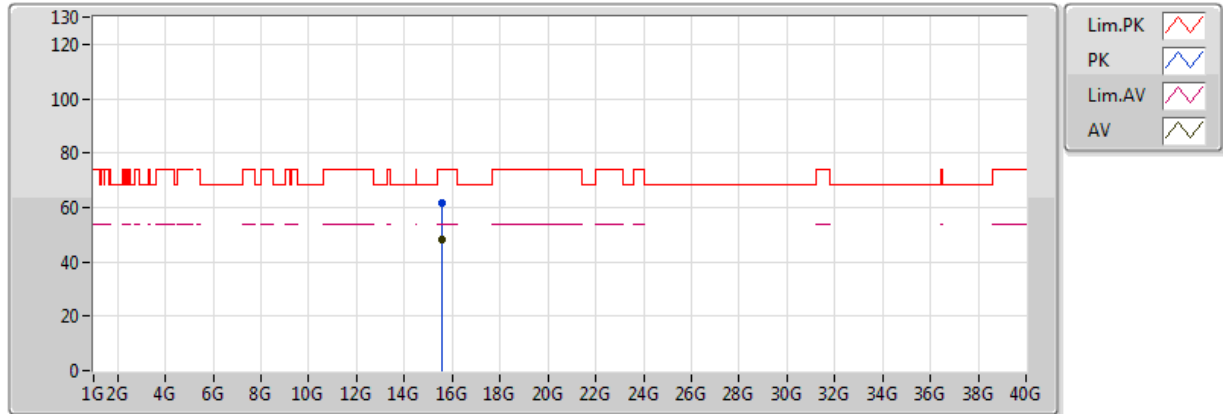


20170221
EUT Y 4TX TXBF
Setting 30 Maxsetting
03-M-01
FSP

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	15.569988G	48.04	54.00	-5.96	18.04	3	V	150	1.87	-
PK	15.570636G	61.74	74.00	-12.26	18.03	3	V	150	1.87	-

VHT40,TXBF_Nss1,(MCS0)_4TX

5190MHz_TX

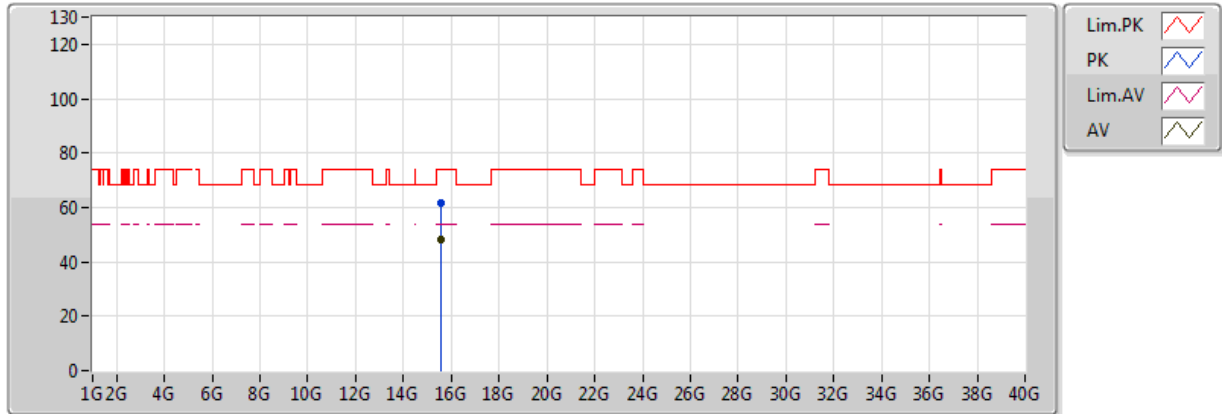


20170221
EUT Y 4TX TXBF
Setting 30 Maxsetting
03-M-01
FSP

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	15.570096G	47.91	54.00	-6.09	18.03	3	H	139	1.97	-
PK	15.569132G	61.49	74.00	-12.51	18.04	3	H	139	1.97	-

VHT40,TXBF_Nss1,(MCS0)_4TX

5230MHz_TX

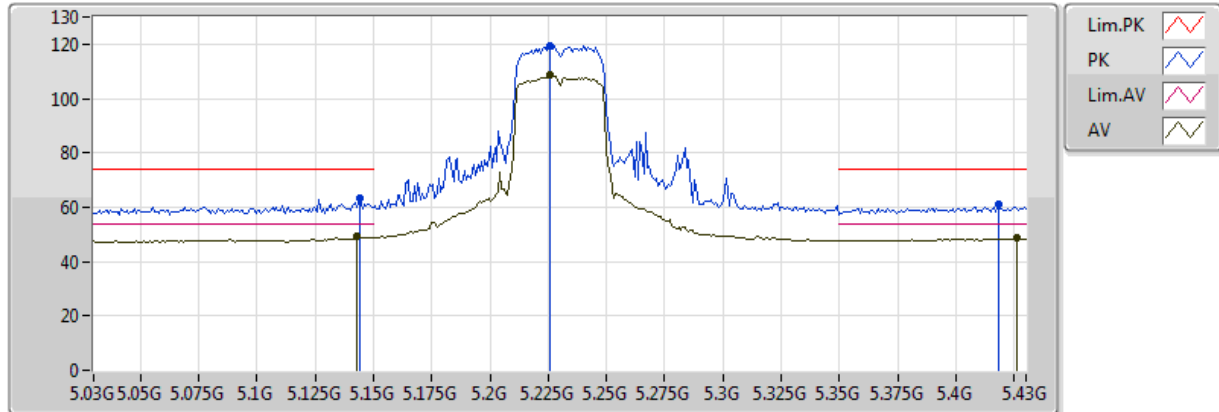


20170221
EUT Y 4TX TXBF
Setting 30 Maxsetting
03-M-01-10
FSP

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	5.1428G	49.57	54.00	-4.43	8.91	3	V	200	1.20	-
AV	5.226G	108.58	Inf	-Inf	9.11	3	V	200	1.20	-
AV	5.426G	48.54	54.00	-5.46	9.50	3	V	200	1.20	-
PK	5.1444G	63.20	74.00	-10.80	8.92	3	V	200	1.20	-
PK	5.226G	119.27	Inf	-Inf	9.11	3	V	200	1.20	-
PK	5.418G	61.11	74.00	-12.89	9.48	3	V	200	1.20	-

VHT40,TXBF_Nss1,(MCS0)_4TX

5230MHz_TX

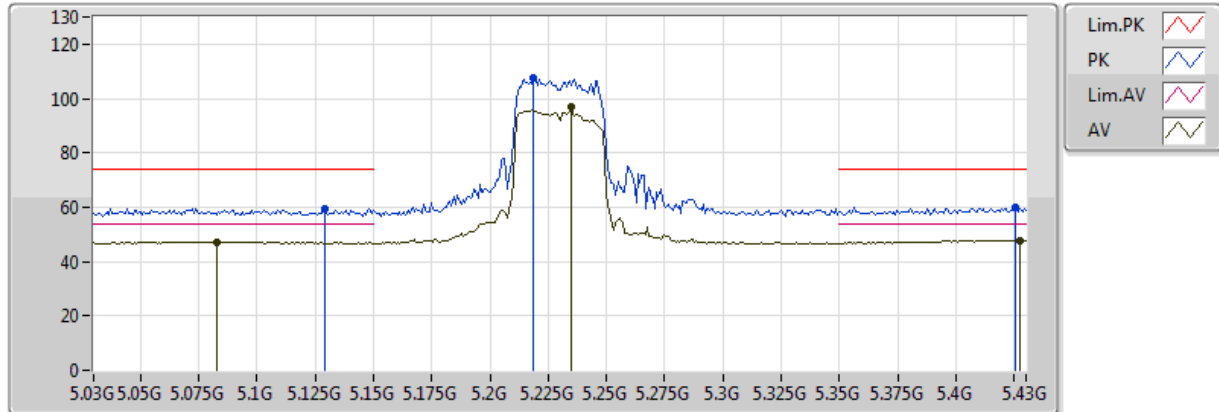


20170221
EUT Y 4TX TXBF
Setting 30 Maxsetting
03-M-01-10
FSP

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	5.0828G	47.34	54.00	-6.66	8.75	3	H	239	1.78	-
AV	5.2348G	96.70	Inf	-Inf	9.13	3	H	239	1.78	-
AV	5.4276G	47.90	54.00	-6.10	9.50	3	H	239	1.78	-
PK	5.1292G	59.47	74.00	-14.53	8.88	3	H	239	1.78	-
PK	5.2188G	107.39	Inf	-Inf	9.10	3	H	239	1.78	-
PK	5.4252G	59.83	74.00	-14.17	9.50	3	H	239	1.78	-

VHT40,TXBF_Nss1,(MCS0)_4TX

5230MHz_TX

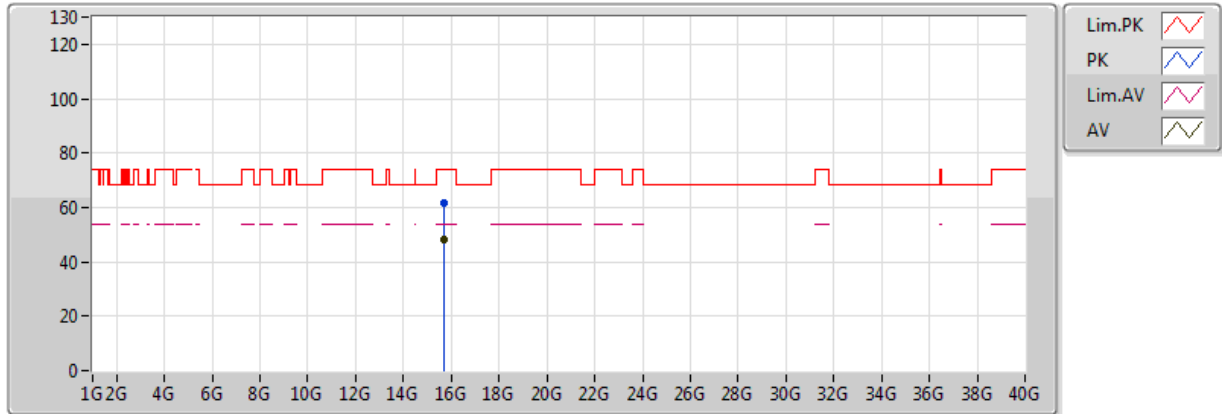


20170221
EUT Y 4TX TXBF
Setting 30 Maxsetting
03-M-01
FSP

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	15.689808G	48.09	54.00	-5.91	17.73	3	V	157	1.48	-
PK	15.689572G	61.56	74.00	-12.44	17.73	3	V	157	1.48	-

VHT40,TXBF_Nss1,(MCS0)_4TX

5230MHz_TX

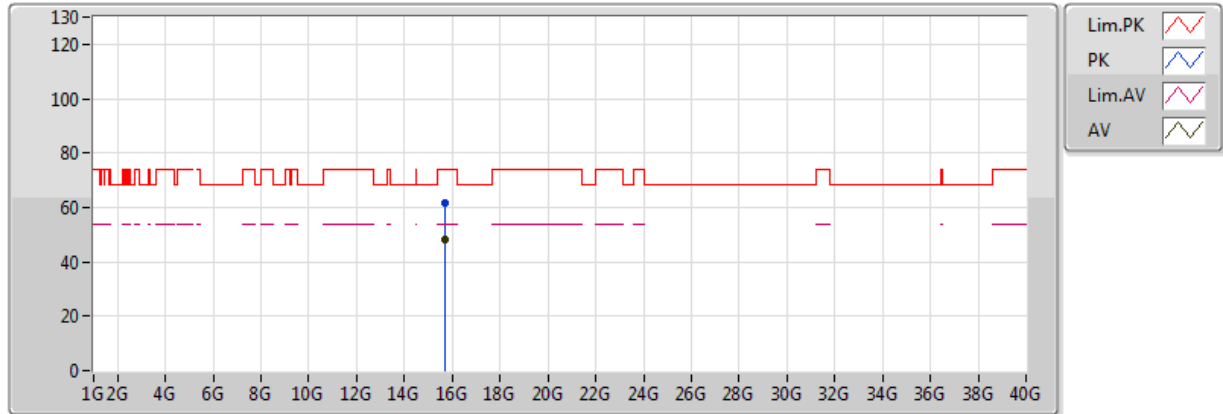


20170221
EUT Y 4TX TXBF
Setting 30 Maxsetting
03-M-01
FSP

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	15.689336G	47.98	54.00	-6.02	17.73	3	H	208	1.88	-
PK	15.690904G	61.79	74.00	-12.21	17.72	3	H	208	1.88	-

VHT40,TXBF_Nss1,(MCS0)_4TX

5755MHz_TX

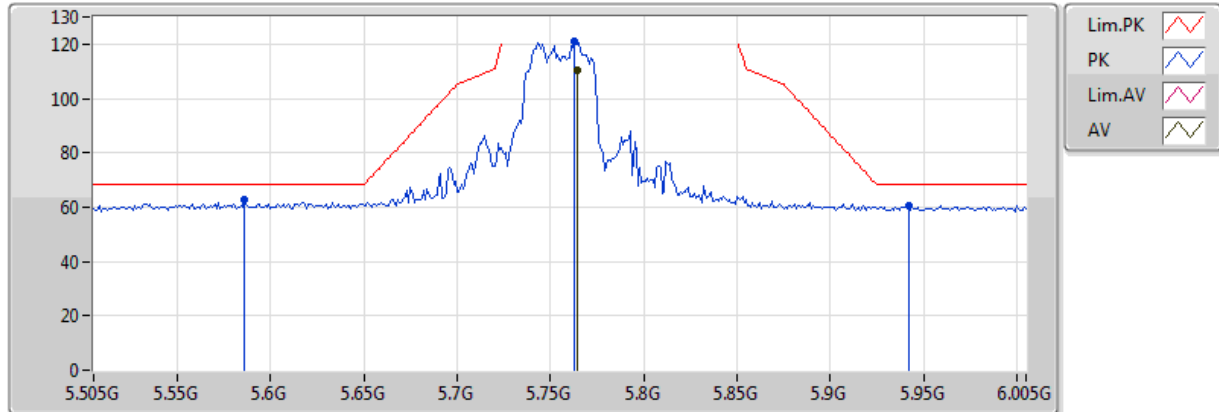


20170221
EUT Y 4TX TXBF
Setting 30 Maxsetting
03-M-01-10
FSP

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	5.764G	110.59	Inf	-Inf	9.81	3	V	173	1.67	-
PK	5.586G	62.65	68.20	-5.55	9.77	3	V	173	1.67	-
PK	5.763G	121.27	Inf	-Inf	9.81	3	V	173	1.67	-
PK	5.942G	60.35	68.20	-7.85	10.02	3	V	173	1.67	-

VHT40,TXBF_Nss1,(MCS0)_4TX

5755MHz_TX

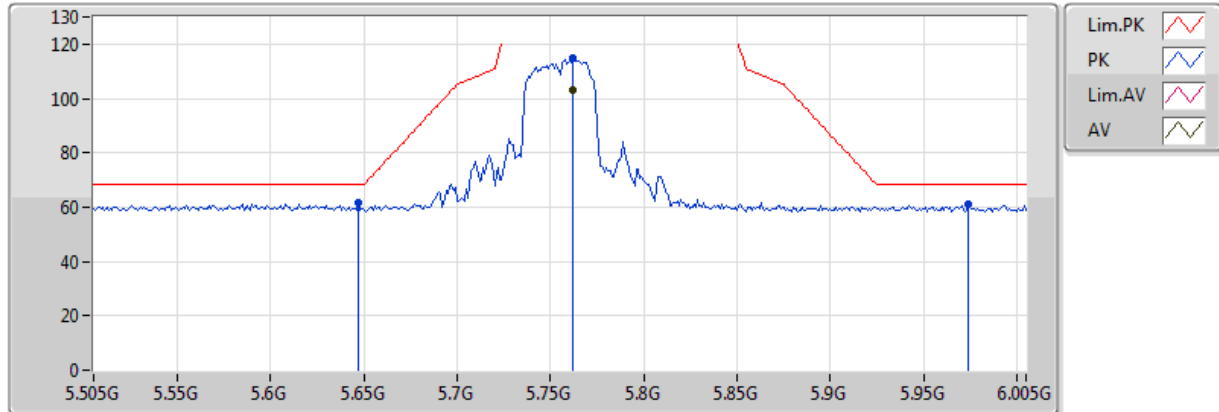


20170221
EUT Y 4TX TXBF
Setting 30 Maxsetting
03-M-01-10
FSP

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	5.762G	103.33	Inf	-Inf	9.81	3	H	233	1.54	-
PK	5.647G	61.38	68.20	-6.82	9.79	3	H	233	1.54	-
PK	5.762G	114.63	Inf	-Inf	9.81	3	H	233	1.54	-
PK	5.974G	60.86	68.20	-7.34	10.06	3	H	233	1.54	-

VHT40,TXBF_Nss1,(MCS0)_4TX

5755MHz_TX

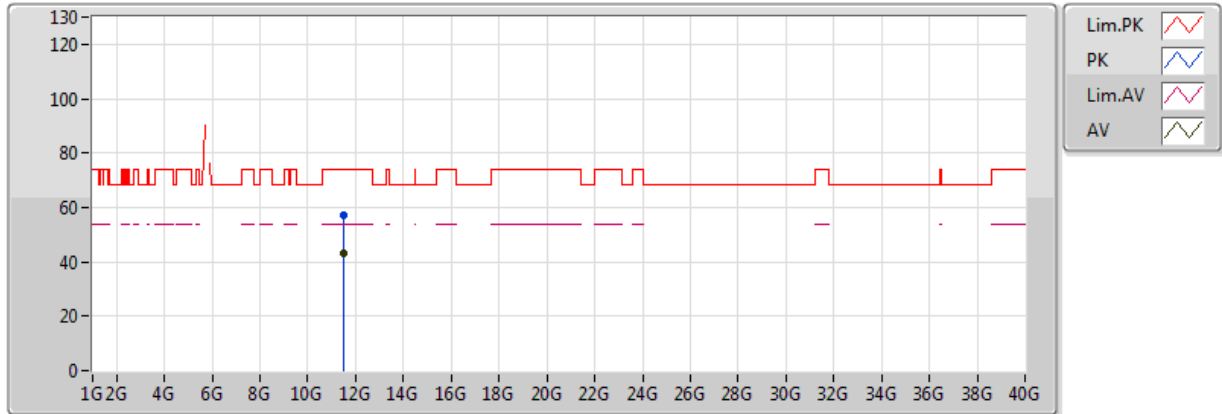


20170221
EUT Y 4TX TXBF
Setting 30 Maxsetting
03-M-01
FSP

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	11.509316G	43.28	54.00	-10.72	16.33	3	V	358	1.68	-
PK	11.510452G	57.07	74.00	-16.93	16.34	3	V	358	1.68	-

VHT40,TXBF_Nss1,(MCS0)_4TX

5755MHz_TX

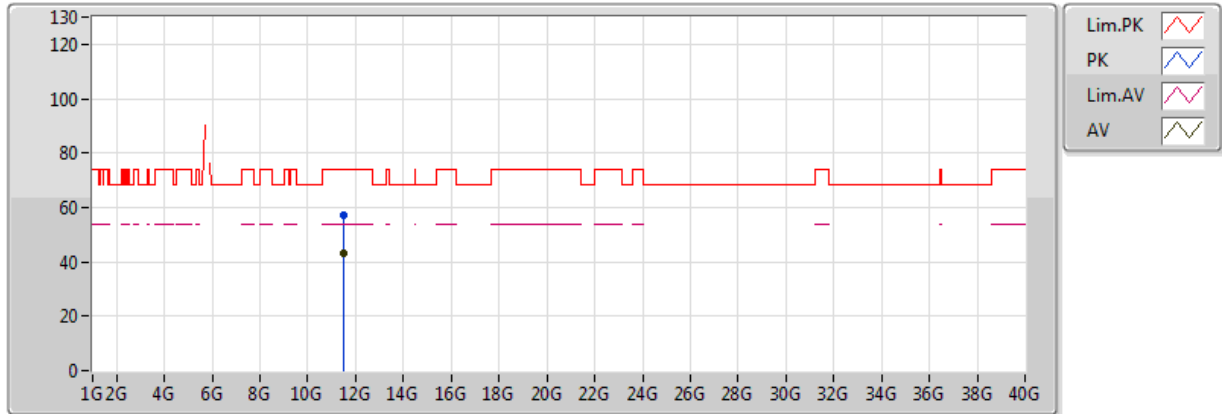


20170221
EUT Y 4TX TXBF
Setting 30 Maxsetting
03-M-01
FSP

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	11.50906G	43.26	54.00	-10.74	16.33	3	H	135	2.14	-
PK	11.50984G	57.02	74.00	-16.98	16.33	3	H	135	2.14	-

VHT40,TXBF_Nss1,(MCS0)_4TX

5795MHz_TX

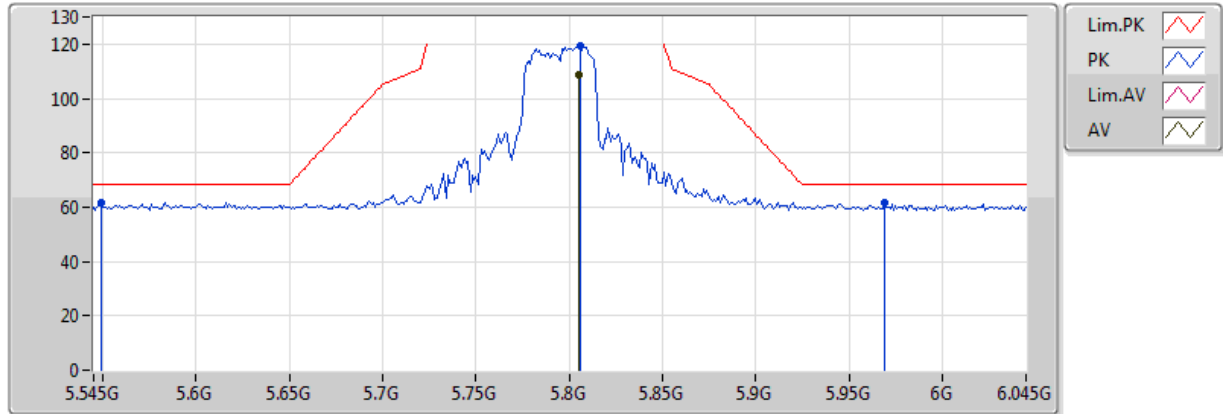


20170221
EUT Y 4TX TXBF
Setting 30 Maxsetting
03-M-01-10
FSP

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	5.805G	108.52	Inf	-Inf	9.83	3	V	162	1.30	-
PK	5.549G	61.90	68.20	-6.30	9.73	3	V	162	1.30	-
PK	5.806G	119.59	Inf	-Inf	9.83	3	V	162	1.30	-
PK	5.969G	61.78	68.20	-6.42	10.06	3	V	162	1.30	-

VHT40,TXBF_Nss1,(MCS0)_4TX

5795MHz_TX

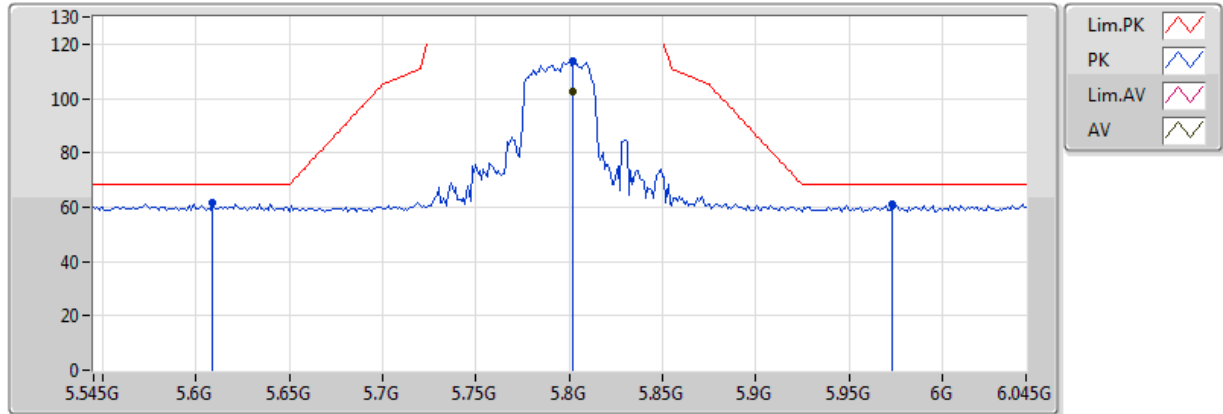


20170221
EUT Y 4TX TXBF
Setting 30 Maxsetting
03-M-01-10
FSP

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	5.802G	102.68	Inf	-Inf	9.82	3	H	229	1.72	-
PK	5.609G	61.45	68.20	-6.75	9.78	3	H	229	1.72	-
PK	5.802G	113.76	Inf	-Inf	9.82	3	H	229	1.72	-
PK	5.973G	61.17	68.20	-7.03	10.06	3	H	229	1.72	-

VHT40,TXBF_Nss1,(MCS0)_4TX

5795MHz_TX

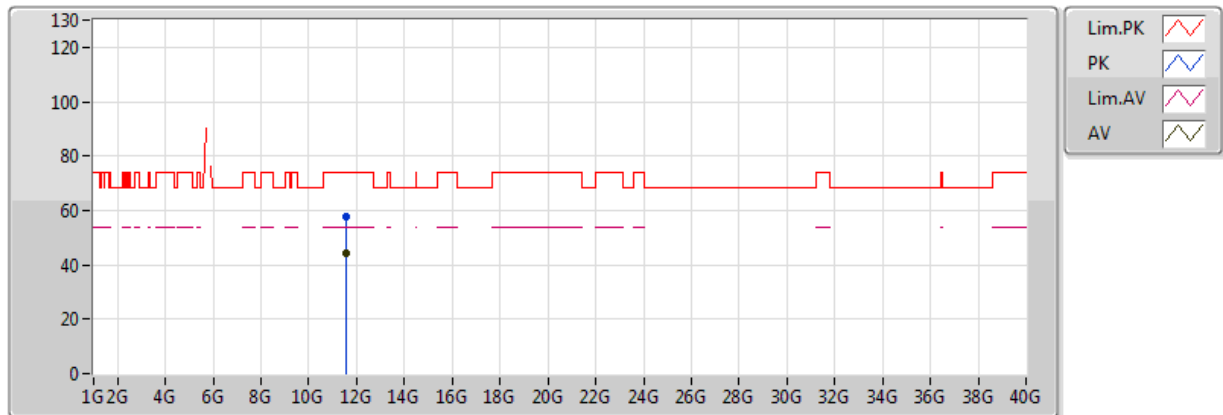


20170221
EUT Y 4TX TXBF
Setting 30 Maxsetting
03-M-01
FSP

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	11.589624G	44.05	54.00	-9.95	16.41	3	V	119	1.40	-
PK	11.590252G	57.96	74.00	-16.04	16.41	3	V	119	1.40	-

VHT40,TXBF_Nss1,(MCS0)_4TX

5795MHz_TX

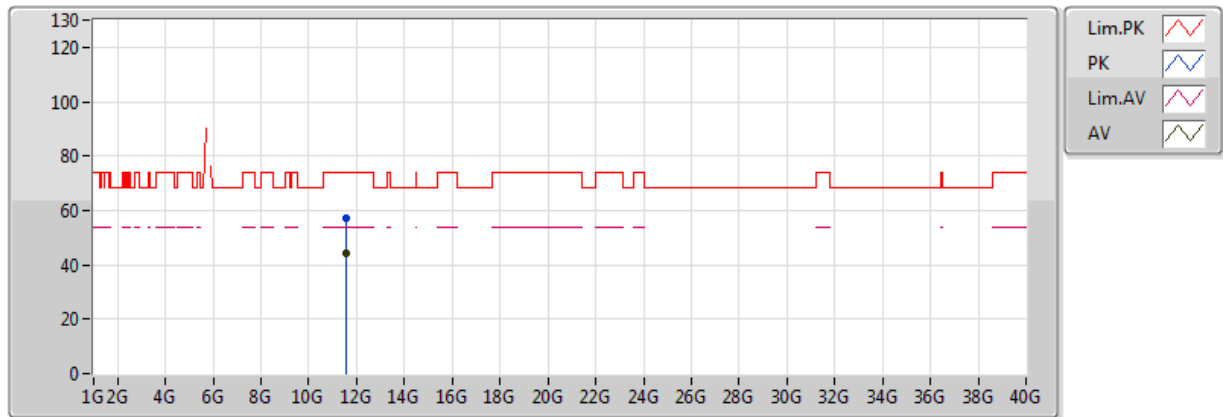


20170221
EUT Y 4TX TXBF
Setting 30 Maxsetting
03-M-01
FSP

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	11.589092G	44.19	54.00	-9.81	16.41	3	H	151	1.27	-
PK	11.589512G	57.22	74.00	-16.78	16.41	3	H	151	1.27	-

VHT80,TXBF_Nss1,(MCS0)_4TX

5210MHz_TX

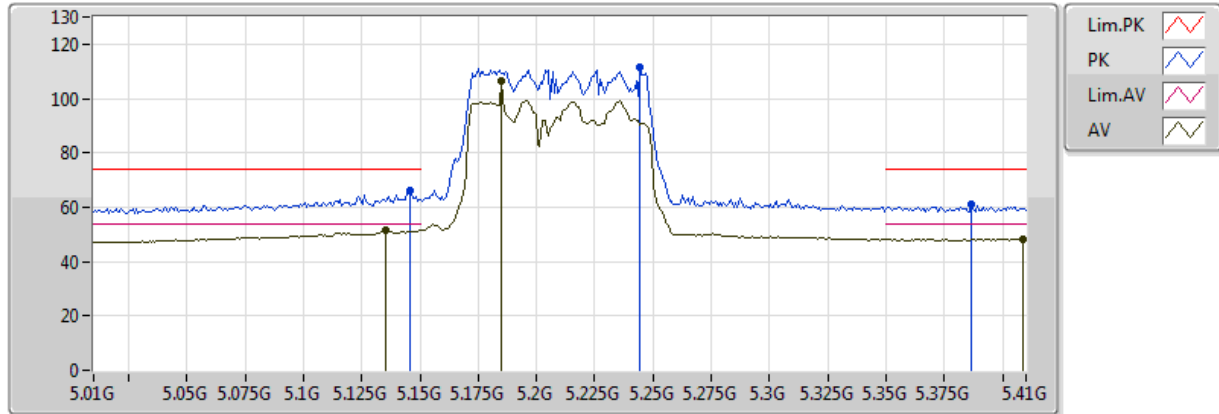


20170221
EUT Y 4TX TXBF
Setting 30 Maxsetting
03-M-01-10
FSP

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	5.1356G	51.65	54.00	-2.35	8.89	3	V	208	1.49	-
AV	5.1852G	106.65	Inf	-Inf	9.02	3	V	208	1.49	-
AV	5.4084G	48.33	54.00	-5.67	9.45	3	V	208	1.49	-
PK	5.146G	65.89	74.00	-8.11	8.92	3	V	208	1.49	-
PK	5.2444G	111.73	Inf	-Inf	9.14	3	V	208	1.49	-
PK	5.3868G	60.85	74.00	-13.15	9.41	3	V	208	1.49	-

VHT80,TXBF_Nss1,(MCS0)_4TX

5210MHz_TX

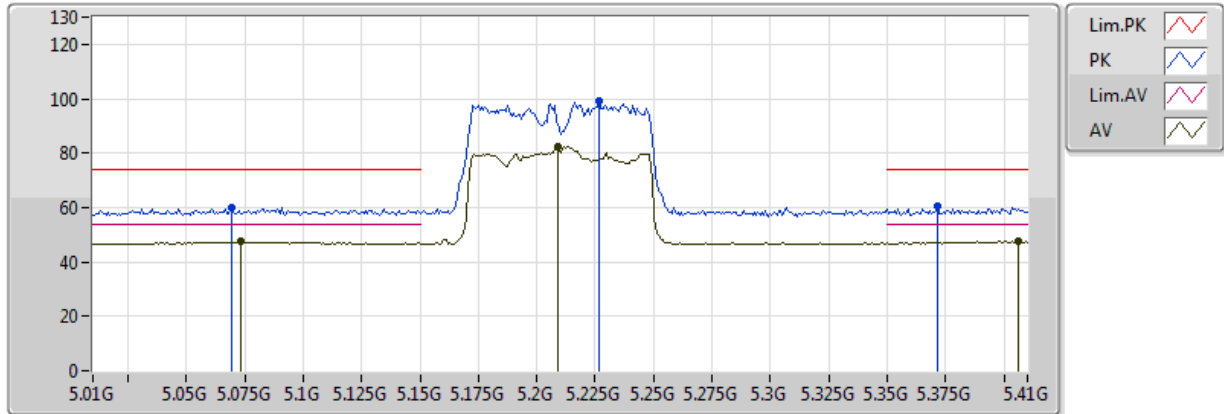


20170221
EUT Y 4TX TXBF
Setting 30 Maxsetting
03-M-01-10
FSP

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	5.0732G	47.40	54.00	-6.60	8.73	3	H	59	1.76	-
AV	5.2092G	82.50	Inf	-Inf	9.08	3	H	59	1.76	-
AV	5.406G	47.50	54.00	-6.50	9.45	3	H	59	1.76	-
PK	5.0692G	60.01	74.00	-13.99	8.72	3	H	59	1.76	-
PK	5.2268G	99.18	Inf	-Inf	9.11	3	H	59	1.76	-
PK	5.3716G	60.25	74.00	-13.75	9.38	3	H	59	1.76	-

VHT80,TXBF_Nss1,(MCS0)_4TX

5210MHz_TX

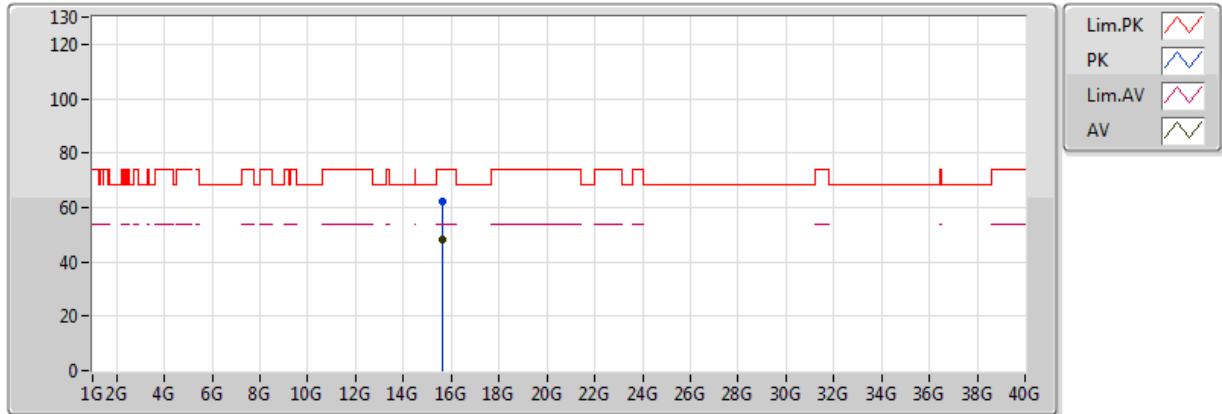


20170221
EUT Y 4TX TXBF
Setting 30 Maxsetting
03-M-01
FSP

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	15.629236G	48.35	54.00	-5.65	17.88	3	V	326	1.31	-
PK	15.629588G	61.99	74.00	-12.01	17.88	3	V	326	1.31	-

VHT80,TXBF_Nss1,(MCS0)_4TX

5210MHz_TX

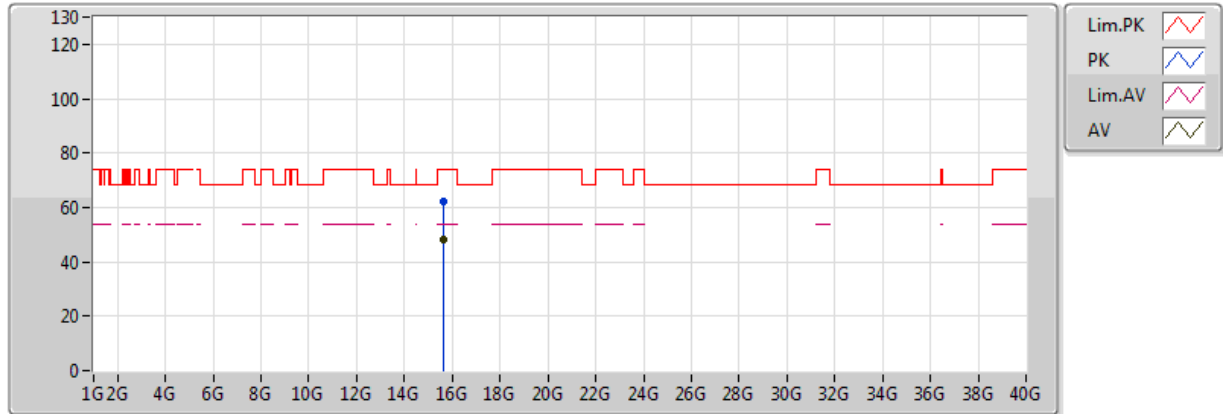


20170221
EUT Y 4TX TXBF
Setting 30 Maxsetting
03-M-01
FSP

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	15.629896G	48.29	54.00	-5.71	17.88	3	H	300	1.92	-
PK	15.629216G	62.15	74.00	-11.85	17.88	3	H	300	1.92	-

VHT80,TXBF_Nss1,(MCS0)_4TX

5775MHz_TX

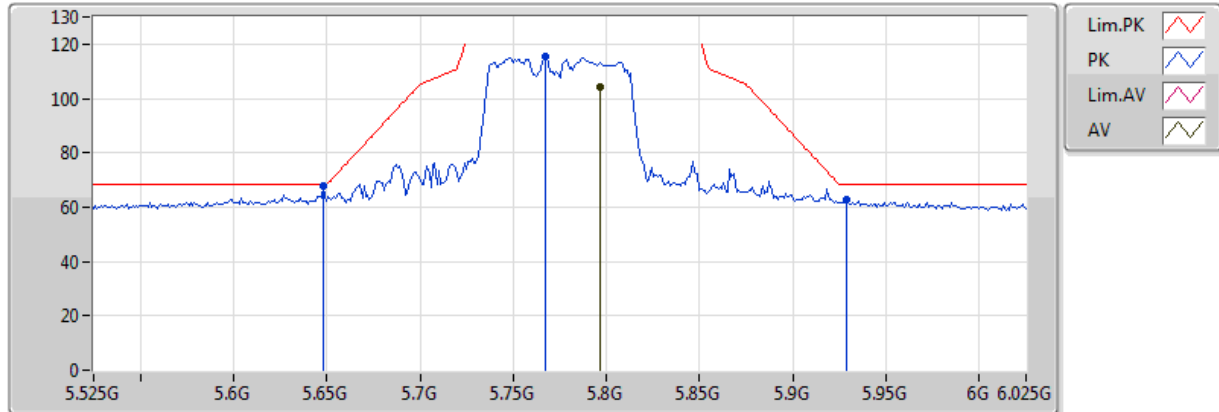


20170221
EUT Y 4TX TXBF
Setting 26
03-M-01-10
FSP

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	5.797G	104.33	Inf	-Inf	9.82	3	V	188	1.27	-
PK	5.648G	67.96	68.20	-0.24	9.79	3	V	188	1.27	-
PK	5.767G	115.19	Inf	-Inf	9.81	3	V	188	1.27	-
PK	5.929G	63.03	68.20	-5.17	10.00	3	V	188	1.27	-

VHT80,TXBF_Nss1,(MCS0)_4TX

5775MHz_TX

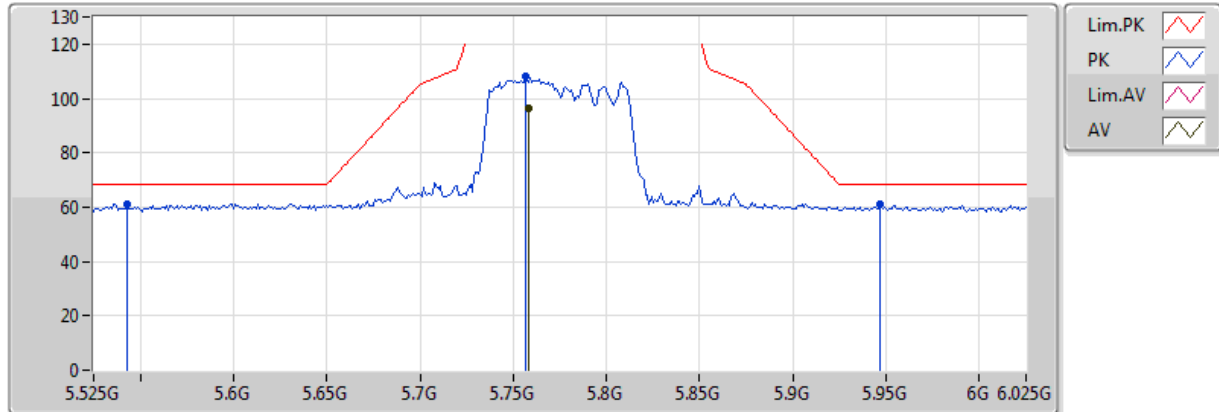


20170221
EUT Y 4TX TXBF
Setting 26
03-M-01-10
FSP

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	5.758G	96.44	Inf	-Inf	9.81	3	H	229	1.48	-
PK	5.543G	61.33	68.20	-6.87	9.73	3	H	229	1.48	-
PK	5.757G	108.27	Inf	-Inf	9.81	3	H	229	1.48	-
PK	5.947G	60.90	68.20	-7.30	10.03	3	H	229	1.48	-

VHT80,TXBF_Nss1,(MCS0)_4TX

5775MHz_TX

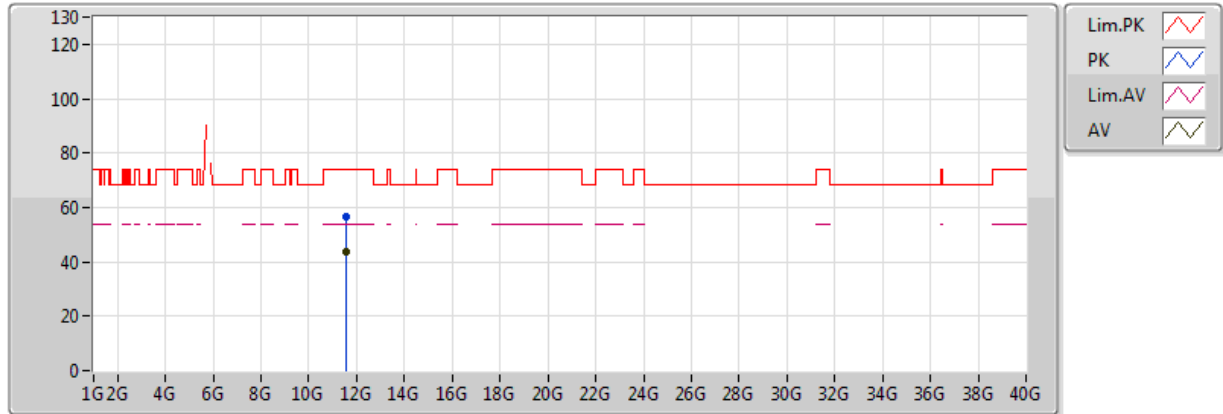


20170221
EUT Y 4TX TXBF
Setting 26
03-M-01
FSP

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	11.549992G	43.48	54.00	-10.52	16.37	3	V	73	2.47	-
PK	11.549132G	56.64	74.00	-17.36	16.37	3	V	73	2.47	-

VHT80,TXBF_Nss1,(MCS0)_4TX

5775MHz_TX

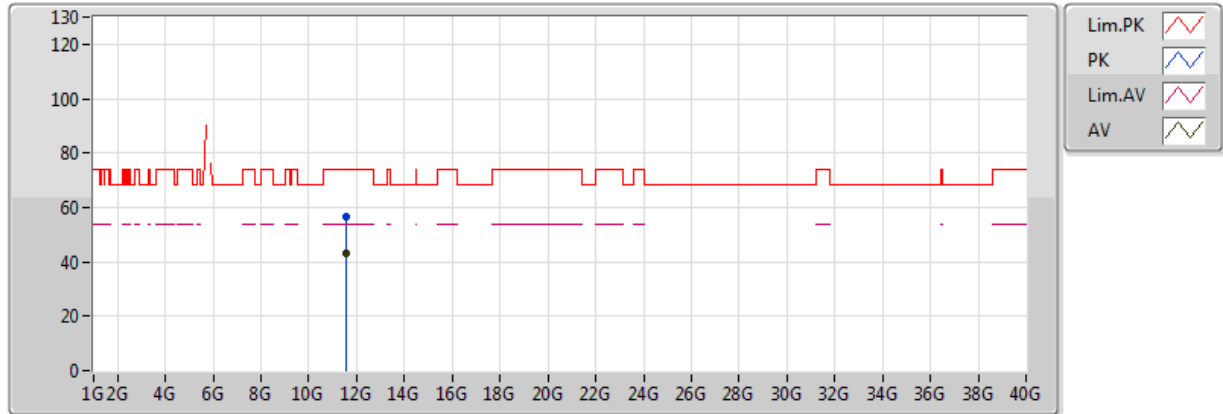

20170221
EUT Y 4TX TXBF
Setting 26
03-M-01
FSP


Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	11.54982G	43.33	54.00	-10.67	16.37	3	H	164	2.20	-
PK	11.549204G	56.42	74.00	-17.58	16.37	3	H	164	2.20	-

**VHT80+80
Summary**

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Pol. (H/V)	Azimuth (°)	Height (m)	Comments
802.11ac VHT80+80-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-	-	-
5.15-5.25GHz	Pass	AV	15.61638G	49.96	54.00	-4.04	17.73	3	H	29	1.19	-

802.11ac VHT80+80-BF_Nss1,(MCS0)_4TX

#5210MHz,5775MHz_TX

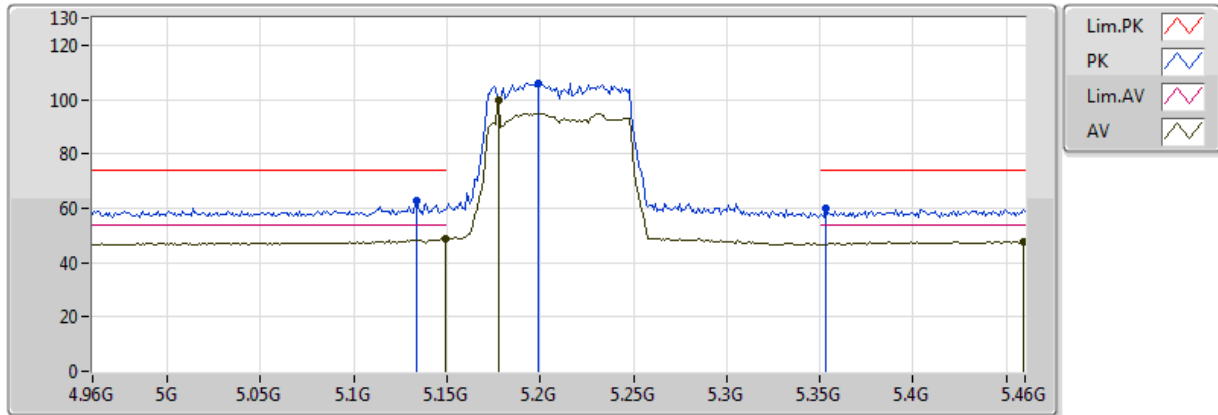


20170223
EUT Y_4TX_TXBF
Setting 25
06-J-4-10
FSP

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	5.149G	48.59	54.00	-5.41	7.23	3	V	330	1.51	-
AV	5.178G	99.55	Inf	-Inf	7.26	3	V	330	1.51	-
AV	5.459G	47.60	54.00	-6.40	7.73	3	V	330	1.51	-
PK	5.134G	62.79	74.00	-11.21	7.22	3	V	330	1.51	-
PK	5.199G	106.18	Inf	-Inf	7.28	3	V	330	1.51	-
PK	5.353G	59.89	74.00	-14.11	7.52	3	V	330	1.51	-

802.11ac VHT80+80-BF_Nss1,(MCS0)_4TX

#5210MHz,5775MHz_TX

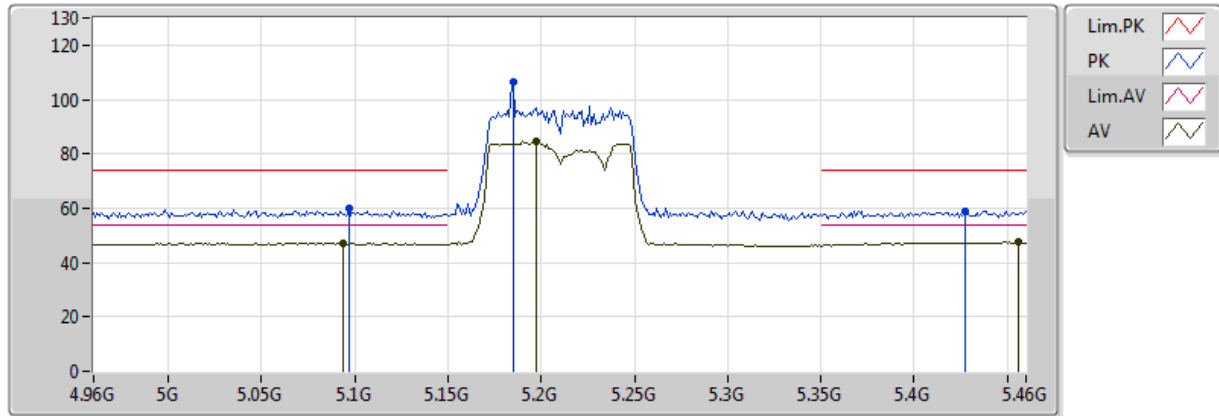


20170223
EUT_Y_4TX_TXBF
Setting 25
06-J-4-10
FSP

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	5.094G	47.12	54.00	-6.88	7.18	3	H	106	1.21	-
AV	5.197G	84.57	Inf	-Inf	7.28	3	H	106	1.21	-
AV	5.456G	47.54	54.00	-6.46	7.72	3	H	106	1.21	-
PK	5.097G	59.90	74.00	-14.10	7.19	3	H	106	1.21	-
PK	5.185G	106.19	Inf	-Inf	7.27	3	H	106	1.21	-
PK	5.427G	59.06	74.00	-14.94	7.65	3	H	106	1.21	-


802.11ac VHT80+80-BF_Nss1,(MCS0)_4TX

#5210MHz,5775MHz_TX

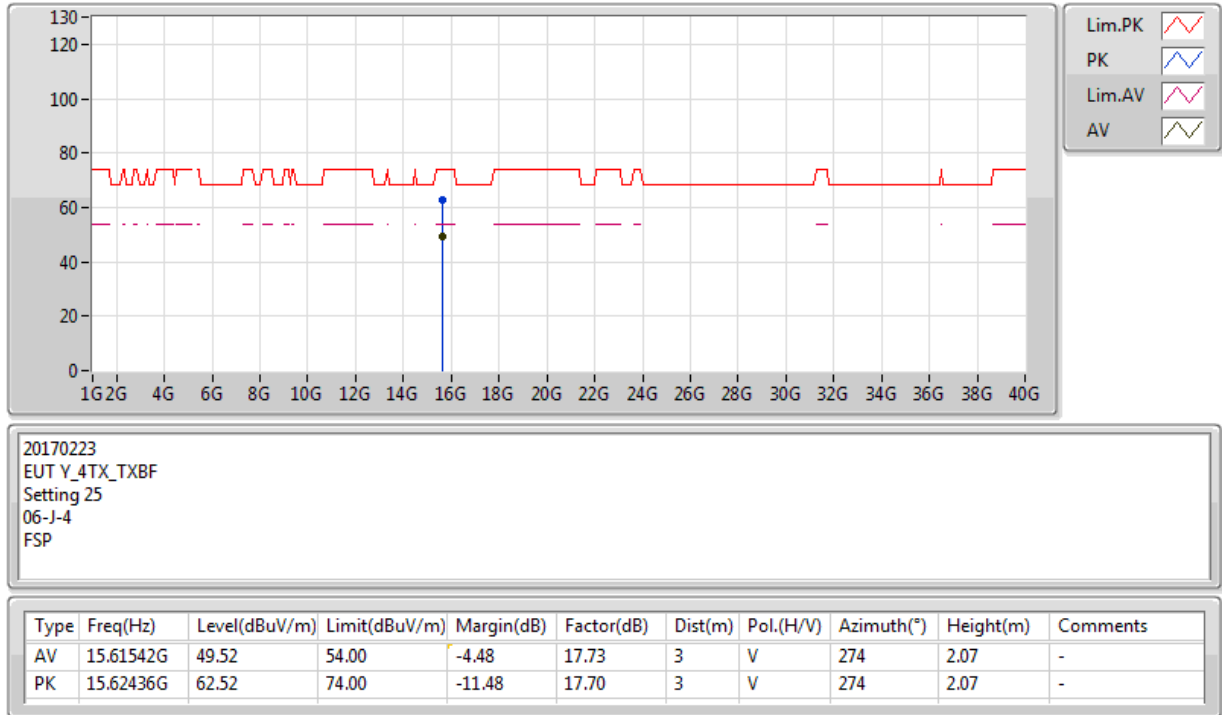

802.11ac VHT80+80-BF_Nss1,(MCS0)_4TX

#5210MHz,5775MHz_TX

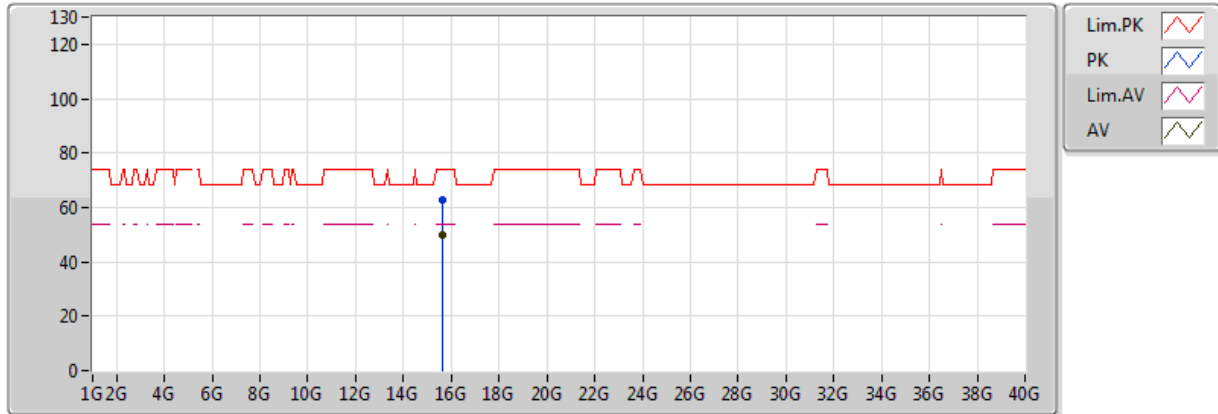


20170223
EUT_Y_4TX_TXBF
Setting 25
06-J-4
FSP

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	15.61638G	49.96	54.00	-4.04	17.73	3	H	29	1.19	-
PK	15.61998G	62.68	74.00	-11.32	17.72	3	H	29	1.19	-

802.11ac VHT80+80-BF_Nss1,(MCS0)_4TX

5210MHz,#5775MHz_TX

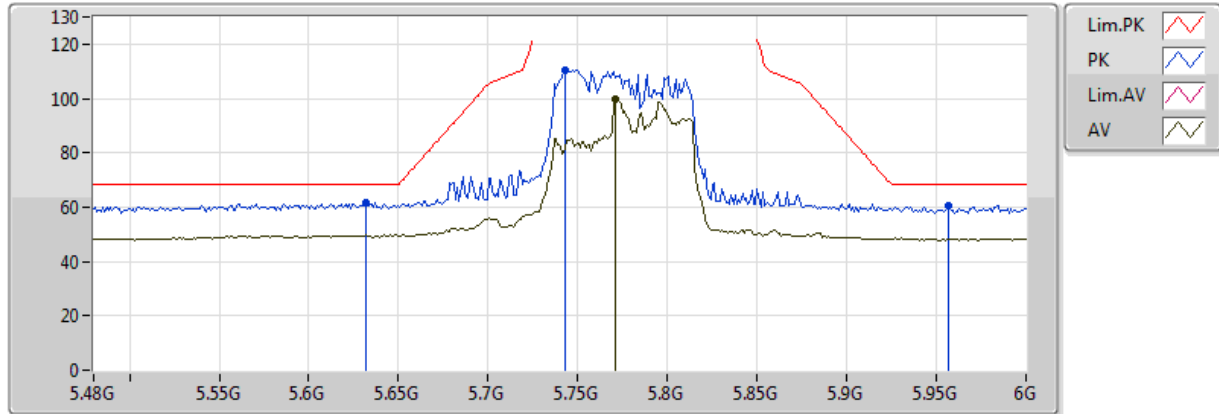


20170223
EUT_Y_4TX_TXBF
Setting 25
06-J-4-10
FSP

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	5.7712G	99.73	Inf	-Inf	8.24	3	V	183	2.24	-
PK	5.63184G	61.70	68.20	-6.50	8.11	3	V	183	2.24	-
PK	5.74312G	110.40	Inf	-Inf	8.22	3	V	183	2.24	-
PK	5.95632G	60.39	68.20	-7.81	8.62	3	V	183	2.24	-

802.11ac VHT80+80-BF_Nss1,(MCS0)_4TX

5210MHz,#5775MHz_TX

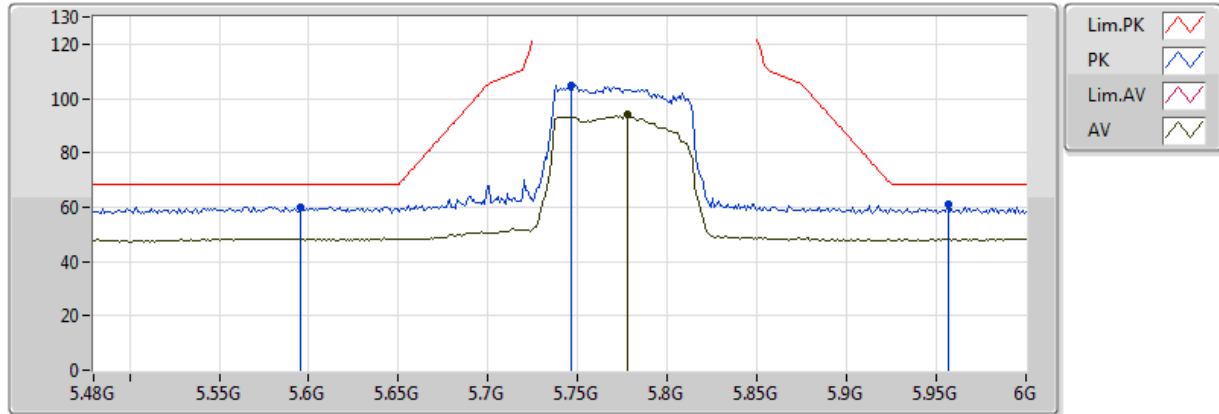


20170223
EUT_Y_4TX_TXBF
Setting 25
06-J-4-10
FSP

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	5.77744G	93.92	Inf	-Inf	8.25	3	H	213	1.74	-
PK	5.59544G	60.18	68.20	-8.02	8.07	3	H	213	1.74	-
PK	5.74624G	104.85	Inf	-Inf	8.22	3	H	213	1.74	-
PK	5.95632G	60.82	68.20	-7.38	8.62	3	H	213	1.74	-

802.11ac VHT80+80-BF_Nss1,(MCS0)_4TX

5210MHz,#5775MHz_TX

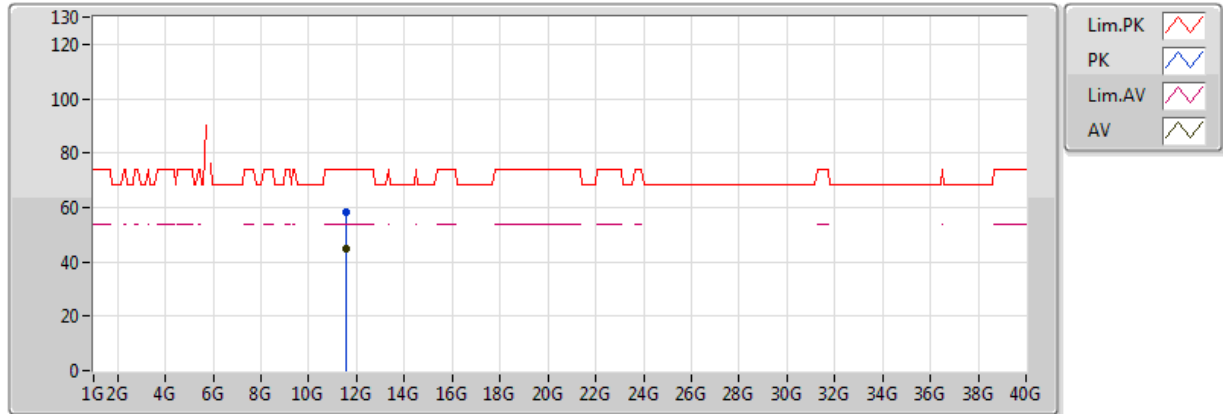


20170223
EUT_Y_4TX_TXBF
Setting 25
06-J-4
FSP

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	11.55606G	44.74	54.00	-9.26	16.78	3	V	129	2.18	-
PK	11.5443G	58.36	74.00	-15.64	16.79	3	V	129	2.18	-

802.11ac VHT80+80-BF_Nss1,(MCS0)_4TX

5210MHz,#5775MHz_TX

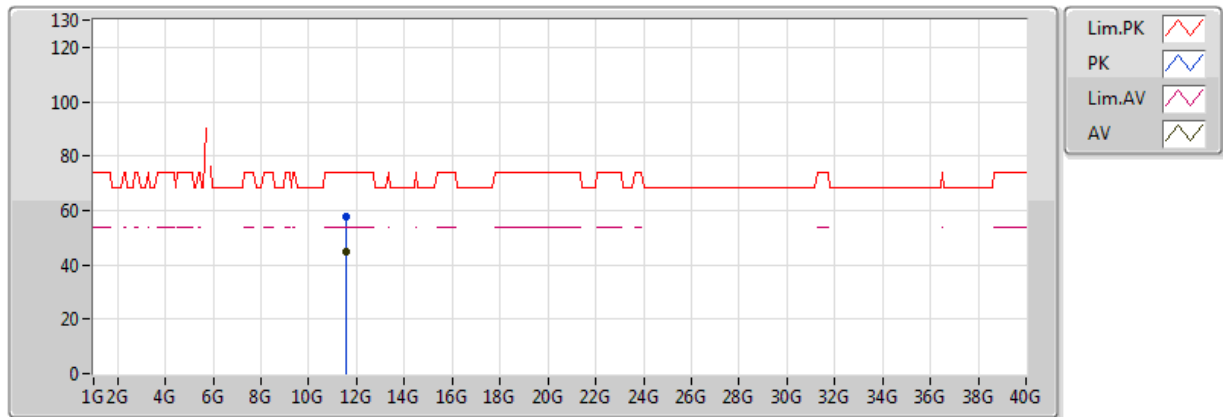

20170223
EUT_Y_4TX_TXBF
Setting 25
06-J-4
FSP

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	11.55306G	44.85	54.00	-9.15	16.78	3	H	73	1.10	-
PK	11.5362G	57.54	74.00	-16.46	16.80	3	H	73	1.10	-

Mode: 20 MHz / Ant. 6

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)			
(V)	5200 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5199.9799	5199.9795	5199.9791	5199.9786
110.00	5199.9791	5199.9789	5199.9779	5199.9772
93.50	5199.9783	5199.9778	5199.9774	5199.9769
Max. Deviation (MHz)	0.0217	0.0222	0.0226	0.0231
Max. Deviation (ppm)	4.17	4.27	4.35	4.44
Result	Pass			

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)			
(°C)	5200 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
0	5199.9820	5199.9819	5199.9812	5199.9807
10	5199.9811	5199.9807	5199.9805	5199.9798
20	5199.9791	5199.9787	5199.9779	5199.9770
30	5199.9787	5199.9781	5199.9777	5199.9775
40	5199.9784	5199.9780	5199.9774	5199.9769
Max. Deviation (MHz)	0.0216	0.0220	0.0226	0.0231
Max. Deviation (ppm)	4.15	4.23	4.35	4.44
Result	Pass			

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)			
(V)	5785 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5784.9792	5784.9784	5784.9780	5784.9777
110.00	5784.9791	5784.9784	5784.9776	5784.9769
93.50	5784.9781	5784.9777	5784.9775	5784.9774
Max. Deviation (MHz)	0.0219	0.0223	0.0225	0.0231
Max. Deviation (ppm)	3.79	3.85	3.89	3.99
Result	Pass			

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)			
(°C)	5785 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
0	5784.9813	5784.9811	5784.9808	5784.9801
10	5784.9798	5784.9797	5784.9792	5784.9783
20	5784.9791	5784.9785	5784.9777	5784.9774
30	5784.9787	5784.9778	5784.9771	5784.9761
40	5784.9772	5784.9769	5784.9763	5784.9756
Max. Deviation (MHz)	0.0228	0.0231	0.0237	0.0244
Max. Deviation (ppm)	3.94	3.99	4.10	4.22
Result	Pass			

Mode: 40 MHz / Ant. 6

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)			
(V)	5190 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5189.9795	5189.9794	5189.9786	5189.9785
110.00	5189.9791	5189.9783	5189.9782	5189.9780
93.50	5189.9785	5189.9776	5189.9774	5189.9765
Max. Deviation (MHz)	0.0215	0.0224	0.0226	0.0235
Max. Deviation (ppm)	4.14	4.32	4.35	4.53
Result	Pass			

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)			
(°C)	5190 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
0	5189.9826	5189.9817	5189.9816	5189.9810
10	5189.9806	5189.9802	5189.9796	5189.9790
20	5189.9791	5189.9785	5189.9783	5189.9777
30	5189.9787	5189.9786	5189.9779	5189.9770
40	5189.9775	5189.9774	5189.9764	5189.9756
Max. Deviation (MHz)	0.0225	0.0226	0.0236	0.0244
Max. Deviation (ppm)	4.34	4.35	4.55	4.70
Result	Pass			

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)			
(V)	5755 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5754.9792	5754.9782	5754.9779	5754.9778
110.00	5754.9791	5754.9781	5754.9777	5754.9776
93.50	5754.9789	5754.9785	5754.9775	5754.9769
Max. Deviation (MHz)	0.0211	0.0219	0.0225	0.0231
Max. Deviation (ppm)	3.67	3.81	3.91	4.01
Result	Pass			

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)			
(°C)	5755 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
0	5754.9812	5754.9802	5754.9796	5754.9793
10	5754.9800	5754.9797	5754.9787	5754.9777
20	5754.9791	5754.9788	5754.9781	5754.9778
30	5754.9787	5754.9786	5754.9782	5754.9780
40	5754.9769	5754.9767	5754.9764	5754.9758
Max. Deviation (MHz)	0.0231	0.0233	0.0236	0.0242
Max. Deviation (ppm)	4.01	4.05	4.10	4.21
Result	Pass			

Mode: 80 MHz / Ant. 6

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)			
(V)	5210 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5209.9798	5209.9789	5209.9779	5209.9776
110.00	5209.9791	5209.9782	5209.9773	5209.9766
93.50	5209.9788	5209.9786	5209.9776	5209.9769
Max. Deviation (MHz)	0.0212	0.0218	0.0227	0.0234
Max. Deviation (ppm)	4.07	4.18	4.36	4.49
Result	Pass			

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)			
(°C)	5210 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
0	5209.9818	5209.9812	5209.9804	5209.9799
10	5209.9801	5209.9794	5209.9788	5209.9778
20	5209.9791	5209.9785	5209.9776	5209.9766
30	5209.9787	5209.9783	5209.9780	5209.9774
40	5209.9779	5209.9769	5209.9768	5209.9765
Max. Deviation (MHz)	0.0221	0.0231	0.0232	0.0235
Max. Deviation (ppm)	4.24	4.43	4.45	4.51
Result	Pass			

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)			
(V)	5775 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5774.9797	5774.9789	5774.9779	5774.9776
110.00	5774.9791	5774.9790	5774.9787	5774.9783
93.50	5774.9781	5774.9778	5774.9774	5774.9765
Max. Deviation (MHz)	0.0219	0.0222	0.0226	0.0235
Max. Deviation (ppm)	3.79	3.84	3.91	4.07
Result	Pass			

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)			
(°C)	5775 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
0	5774.9813	5774.9805	5774.9797	5774.9792
10	5774.9801	5774.9800	5774.9794	5774.9784
20	5774.9791	5774.9781	5774.9774	5774.9770
30	5774.9787	5774.9780	5774.9773	5774.9768
40	5774.9781	5774.9778	5774.9773	5774.9771
Max. Deviation (MHz)	0.0219	0.0222	0.0227	0.0232
Max. Deviation (ppm)	3.79	3.84	3.93	4.02
Result	Pass			