



RADIO TEST REPORT

FCC ID : H8NTCG400
Equipment : Strand Mount Access Point
Brand Name : ASKEY
Model Name : TCG400-o
Applicant : Askey Computer Corp
10F, No. 119, JIANKANG RD., ZHONGHE DIST.,
NEW TAIPEI CITY 23585, Taiwan
Manufacturer : Askey Computer Corp
10F, No. 119, JIANKANG RD., ZHONGHE DIST.,
NEW TAIPEI CITY 23585, Taiwan
Standard : 47 CFR FCC Part 15.247

The product was received on May 12, 2025, and testing was started from May 13, 2025 and completed on Aug. 04, 2025. We, Sporton International Inc. Hsinchu Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2020 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. Hsinchu Laboratory, the test report shall not be reproduced except in full.

Approved by: Sam Chen

Sporton International Inc. Hsinchu Laboratory

No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Information.....	5
1.2 Applicable Standards	9
1.3 Testing Location Information	9
1.4 Measurement Uncertainty	9
2 Test Configuration of EUT.....	10
2.1 Test Channel Mode	10
2.2 The Worst Case Measurement Configuration.....	11
2.3 EUT Operation during Test	12
2.4 Accessories	13
2.5 Support Equipment.....	13
2.6 Test Setup Diagram	15
3 Transmitter Test Result	19
3.1 AC Power-line Conducted Emissions	19
3.2 DTS Bandwidth	21
3.3 Maximum Conducted Output Power	22
3.4 Power Spectral Density	25
3.5 Emissions in Non-restricted Frequency Bands	27
3.6 Emissions in Restricted Frequency Bands.....	28
4 Test Equipment and Calibration Data	32
Appendix A. Test Results of AC Power-line Conducted Emissions	
Appendix B. Test Results of DTS Bandwidth	
Appendix C. Test Results of Maximum Conducted Output Power	
Appendix D. Test Results of Power Spectral Density	
Appendix E. Test Results of Emissions in Non-restricted Frequency Bands	
Appendix F. Test Results of Emissions in Restricted Frequency Bands	
Appendix G. Test Results of Radiated Emission Co-location	
Appendix H. Test Photos	
Photographs of EUT v01	



TEL : 886-3-656-9065
FAX : 886-3-656-9085
Report Template No.: CB-A10_10 Ver1.3



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.2	15.203	Antenna Requirement	PASS	-
3.1	15.207	AC Power-line Conducted Emissions	PASS	-
3.2	15.247(a)	DTS Bandwidth	PASS	-
3.3	15.247(b)	Maximum Conducted Output Power	PASS	-
3.4	15.247(e)	Power Spectral Density	PASS	-
3.5	15.247(d)	Emissions in Non-restricted Frequency Bands	PASS	-
3.6	15.247(d)	Emissions in Restricted Frequency Bands	PASS	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the chapter "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Sam Chen**Report Producer: Vicky Huang**



1 General Description

1.1 Information

1.1.1 RF General Information

Frequency Range (MHz)	IEEE Std. 802.11	Ch. Frequency (MHz)	Channel Number
2400-2483.5	b, g, n (HT20), VHT20, ax (HEW20), be (EHT20)	2412-2462	1-11 [11]
2400-2483.5	n (HT40), VHT40, ax (HEW40), be (EHT40)	2422-2452	3-9 [7]

Band	Mode	BWch (MHz)	Nant
2.4-2.4835GHz	802.11b	20	4TX
2.4-2.4835GHz	802.11g	20	4TX
2.4-2.4835GHz	802.11n HT20	20	4TX
2.4-2.4835GHz	802.11n HT20-BF	20	4TX
2.4-2.4835GHz	VHT20	20	4TX
2.4-2.4835GHz	VHT20-BF	20	4TX
2.4-2.4835GHz	802.11ax HEW20	20	4TX
2.4-2.4835GHz	802.11ax HEW20-BF	20	4TX
2.4-2.4835GHz	802.11be EHT20	20	4TX
2.4-2.4835GHz	802.11be EHT20-BF	20	4TX
2.4-2.4835GHz	802.11n HT40	40	4TX
2.4-2.4835GHz	802.11n HT40-BF	40	4TX
2.4-2.4835GHz	VHT40	40	4TX
2.4-2.4835GHz	VHT40-BF	40	4TX
2.4-2.4835GHz	802.11ax HEW40	40	4TX
2.4-2.4835GHz	802.11ax HEW40-BF	40	4TX
2.4-2.4835GHz	802.11be EHT40	40	4TX
2.4-2.4835GHz	802.11be EHT40-BF	40	4TX

Note:

- ♦ 11b mode uses a combination of DSSS-DBPSK, DQPSK, CCK modulation.
- ♦ 11g, HT20 and HT40 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.
- ♦ VHT20, VHT40 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM modulation.
- ♦ HEW20, HEW40 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM modulation.
- ♦ EHT20, EHT40 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM, 4096QAM modulation.
- ♦ BWch is the nominal channel bandwidth.

**1.1.2 Antenna Information**

Ant.	Port					Brand	Model Name	Antenna Type	Connector	Gain (dBi)
	WLAN 2.4GHz	WLAN 5GHz	WLAN 6GHz	DFS	GPS					
1	1	4	-	-	-	AWAN	CHS3320N-D388	PIFA	I-Pex	Note1
2	3	2	-	-	-	AWAN	CHS3320N-D388	PIFA	I-Pex	
3	4	1	-	-	-	AWAN	CHS3320N-D388	PIFA	I-Pex	
4	2	3	-	-	-	AWAN	CHS3320N-D388	PIFA	I-Pex	
5	-	-	4	-	-	AWAN	CHS3320N-D388	PIFA	I-Pex	
6	-	-	2	-	-	AWAN	CHS3320N-D388	PIFA	I-Pex	
7	-	-	1	-	-	AWAN	CHS3320N-D388	PIFA	I-Pex	
8	-	-	3	-	-	AWAN	CHS3320N-D388	PIFA	I-Pex	
9	-	-	-	1	-	AWAN	CHS3320N-D388	PIFA	I-Pex	4.57
10	-	-	-	-	1	AWAN	CHS3320N-D388	PIFA	I-Pex	4.33

Note 1:

Ant.	Gain (dBi)						
	WLAN 2.4GHz	WLAN 5GHz UNII 1	WLAN 5GHz UNII 2A	WLAN 5GHz UNII 2C	WLAN 5GHz UNII 3	WLAN 6GHz UNII 5	WLAN 6GHz UNII 7
1	3.95	4.15	3.85	4.42	3.96	-	-
2	4.3	4.09	4.01	4.25	4.5	-	-
3	4.32	4.32	4.55	4.46	4.05	-	-
4	4.48	3.89	4.65	4.51	4.26	-	-
5	-	-	-	-	-	3.96	4.28
6	-	-	-	-	-	4.65	4.35
7	-	-	-	-	-	4.08	4.41
8	-	-	-	-	-	4.34	4.33



Ant.	Gain (dBi) for 30 degree						
	WLAN 2.4GHz	WLAN 5GHz UNII 1	WLAN 5GHz UNII 2A	WLAN 5GHz UNII 2C	WLAN 5GHz UNII 3	WLAN 6GHz UNII 5	WLAN 6GHz UNII 7
1	-6.36	-10.16	-9.11	-10.23	-9.48	-	-
2	-6.43	-9.07	-10.09	-9.8	-10.18	-	-
3	-5.51	-9.52	-9.39	-11.15	-9.38	-	-
4	-3.55	-8	-7.24	-10.16	-10.54	-	-
5	-	-	-	-	-	-9.84	-9.85
6	-	-	-	-	-	-11.47	-11.66
7	-	-	-	-	-	-7.43	-9.67
8	-	-	-	-	-	-6.17	-7.94

Ant.	Uncorrelated (dBi)						
	WLAN 2.4GHz	WLAN 5GHz UNII 1	WLAN 5GHz UNII 2A	WLAN 5GHz UNII 2C	WLAN 5GHz UNII 3	WLAN 6GHz UNII 5	WLAN 6GHz UNII 7
Directional Gain (dBi) (4T1S)	5.9949	4.904	4.8922	4.9339	5.7697	7.063	7.3218
Ant.	Uncorrelated (dBi) for 30 degree						
	WLAN 2.4GHz	WLAN 5GHz UNII 1	WLAN 5GHz UNII 2A	WLAN 5GHz UNII 2C	WLAN 5GHz UNII 3	WLAN 6GHz UNII 5	WLAN 6GHz UNII 7
Directional Gain (dBi) (4T1S)	-3.9751	-7.4643	-8.2236	-8.6723	-8.0708	-7.483	-7.6229

Ant.	Correlated Gain (dBi)						
	WLAN 2.4GHz	WLAN 5GHz UNII 1	WLAN 5GHz UNII 2A	WLAN 5GHz UNII 2C	WLAN 5GHz UNII 3	WLAN 6GHz UNII 5	WLAN 6GHz UNII 7
Directional Gain (dBi) (4T1S)	6.4216	5.2513	5.8649	5.9053	5.4561	7.5772	7.1478
Ant.	Correlated Gain (dBi) for 30 degree						
	WLAN 2.4GHz	WLAN 5GHz UNII 1	WLAN 5GHz UNII 2A	WLAN 5GHz UNII 2C	WLAN 5GHz UNII 3	WLAN 6GHz UNII 5	WLAN 6GHz UNII 7
Directional Gain (dBi) (4T1S)	0.4203	-1.267	-1.5559	-2.1588	-1.2549	-1.3096	-1.4423



Note2: The above information was declared by manufacturer.

Note3: During operating in 5GHz, the antenna 9 which has the receiving function only is used for DFS.

Note4: The DFS function of EUT was not enabled at this time.

Note5: The 6GHz function of Antennas 5~8 doesn't be enabled at this time.

For WLAN 2.4GHz function:

For IEEE 802.11b/g/n/VHT/ax/be (4TX/4RX):

Port 1~4 can be used as transmitting/receiving antenna.

Port 1~4 could transmit/receive simultaneously.

For WLAN 5GHz function:

For IEEE 802.11a/n/ac/ax/be (4TX/4RX):

Port 1~4 can be used as transmitting/receiving antenna.

Port 1~4 could transmit/receive simultaneously.

For additional DFS function (1RX):

Only Port 1(Ant. 9) can be used as a receiving antenna.

For WLAN 6GHz function:

For IEEE 802.11ax/be (4TX/4RX):

Port 1~4 can be used as transmitting/receiving antenna.

Port 1~4 could transmit/receive simultaneously.

For GPS Function:

For GPS mode (1RX)

Only Port 1 can be use as receive antenna.

1.1.3 Mode Test Duty Cycle

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11b_Nss 1,(1D)	0.999	0.01	8.195m	10Hz (DC>=0.98)
802.11g_Nss 1,(6D)	0.994	0.03	1.363m	10Hz (DC>=0.98)
802.11be EHT20_Nss 1,(M0)	0.991	0.04	1m	10Hz (DC>=0.98)
802.11be EHT20-BF_Nss 1,(M0)	0.938	0.28	5.339m	200
802.11be EHT40_Nss 1,(M0)	0.984	0.07	535u	10Hz (DC>=0.98)
802.11be EHT40-BF_Nss 1,(M0)	0.953	0.21	5.379m	200

Note:

- ♦ DC is Duty Cycle.
- ♦ DCF is Duty Cycle Factor.

1.1.4 EUT Operational Condition

EUT Power Type	From host system			
Beamforming Function	☒	With beamforming	☐	Without beamforming
	The product has beamforming function for n/VHT/ax/be in 2.4GHz, n/ac/ax/be in 5GHz.			
Function	☒	Point-to-multipoint	☐	Point-to-point
Support RU	☒	Full RU	☐	Partial RU
Test Software Version	Non-beamforming: DUT GUI 2.20.1 Beamforming: DOS [ver 6.1.7601]			

Note: The above information was declared by manufacturer.



1.2 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15.247
- ♦ ANSI C63.10-2020

The following reference test guidance is not within the scope of accreditation of TAF.

- ♦ FCC KDB 558074 D01 v05r02
- ♦ FCC KDB 662911 D03 v01
- ♦ FCC KDB 414788 D01 v01r01

1.3 Testing Location Information

Testing Location Information	
Test Lab. : Sporton International Inc. Hsinchu Laboratory	
Hsinchu (TAF: 3787)	ADD: No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.) TEL: 886-3-656-9065 FAX: 886-3-656-9085 Test site Designation No. TW3787 with FCC. Conformity Assessment Body Identifier (CABID) TW3787 with ISED.

Test Condition	Test Site No.	Test Engineer	Test Environment (°C / %)	Test Date
RF Conducted	TH02-CB	Stim Sung	21.8~22.8 / 60~63	Jun. 11, 2025~ Jul. 28, 2025
Radiated (Below 1GHz)	03CH05-CB	Chris Li	21.5~22.9 / 57~60	Aug. 01, 2025
Radiated (Co-location)	03CH06-CB	Chris Li	21.9~23.1 / 60~62	May 13, 2025~ May 21, 2025
Radiated (Above 1GHz)	03CH02-CB	Chris Li	21.5~23.3 / 58~61	May 13, 2025~ May 21, 2025
AC Conduction	CO01-CB	Scott Tseng	23~24 / 61~62	Aug. 04, 2025

1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	3.8 dB	Confidence levels of 95%
Radiated Emission (9kHz ~ 30MHz)	3.8 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	4.7 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	4.2 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	4.0 dB	Confidence levels of 95%
Conducted Emission	2.5 dB	Confidence levels of 95%
Output Power Measurement	1.3 dB	Confidence levels of 95%
Power Density Measurement	2.0 dB	Confidence levels of 95%
Bandwidth Measurement	1.0 %	Confidence levels of 95%



2 Test Configuration of EUT

2.1 Test Channel Mode

Mode
802.11b_Nss1,(1Mbps)_4TX
2412MHz
2437MHz
2462MHz
802.11g_Nss1,(6Mbps)_4TX
2412MHz
2417MHz
2437MHz
2457MHz
2462MHz
802.11be EHT20_Nss1,(MCS0)_4TX
2412MHz
2417MHz
2437MHz
2457MHz
2462MHz
802.11be EHT40_Nss1,(MCS0)_4TX
2422MHz
2437MHz
2452MHz
802.11be EHT20-BF_Nss1,(MCS0)_4TX
2412MHz
2417MHz
2437MHz
2457MHz
2462MHz
802.11be EHT40-BF_Nss1,(MCS0)_4TX
2422MHz
2427MHz
2437MHz
2447MHz
2452MHz

Note:

- ♦ Evaluated EHT20/EHT40 mode only, due to similar modulation. The power setting of HT20/HT40/VHT20/VHT40/HEW20/HEW40 mode are the same or lower than EHT20/EHT40.

2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
Operating Mode	CTX
1	EUT + WLAN 2.4GHz
2	EUT + WLAN 5GHz
For operating mode 2 is the worst case and it was record in this test report.	

The Worst Case Mode for Following Conformance Tests	
Tests Item	DTS Bandwidth Maximum Conducted Output Power Power Spectral Density Emissions in Non-restricted Frequency Bands
Test Condition	Conducted measurement at transmit chains

The Worst Case Mode for Following Conformance Tests	
Tests Item	Emissions in Restricted Frequency Bands
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.
Operating Mode < 1GHz	CTX
After evaluating, and the worst case was found at Z axis, so it was selected to perform test and its test result was written in the report.	
1	EUT in Z axis + WLAN 2.4GHz
2	EUT in Z axis + WLAN 5GHz
For operating mode 1 is the worst case and it was record in this test report.	
Operating Mode > 1GHz	CTX
After evaluating, and the worst case was found at Z axis, so it was selected to perform test and its test result was written in the report.	
1	EUT in Z axis



The Worst Case Mode for Following Conformance Tests	
Tests Item	Simultaneous Transmission Analysis - Radiated Emission Co-location
Test Condition	Radiated measurement
Operating Mode	Normal Link
After evaluating, and the worst case was found at Z axis, so it was selected to perform test and its test result was written in the report.	
1	EUT in Z axis-WLAN 2.4GHz + WLAN 5GHz
Refer to Appendix G for Radiated Emission Co-location.	

The Worst Case Mode for Following Conformance Tests	
Tests Item	Simultaneous Transmission Analysis - Co-location RF Exposure Evaluation
Operating Mode	
1	WLAN 2.4GHz + WLAN 5GHz
Refer to Sporton Test Report No.: FA550625 for Co-location RF Exposure Evaluation.	

2.3 EUT Operation during Test

For CTX Mode:

non-beamforming mode:

The EUT was programmed to be in continuously transmitting mode.

beamforming mode:

During the test, the following programs under WIN 10 were executed.

The program was executed as follows:

1. During the test, the EUT operation to normal function.
2. Executed command fixed test channel under DOS [ver 6.1.7601].
3. Executed "Lantest.exe" to link with the remote workstation to transmit and receive packet by WLAN module and transmit duty cycle no less than 98%.

For Normal Link Mode:

During the test, the EUT operation to normal function.



2.4 Accessories

Accessories
Sealing collar 1*1
Sealing collar 2*1
Ground cable*1: Non-Shielded, 3m
Bracket*2
Grounding screw*1

2.5 Support Equipment

For AC Conduction:

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	Power supply	MAGA POWER	TVS 6007	N/A
B	Fiber converter	CISCO	SFP-10G-SR	N/A
C	NB	DELL	E6430	N/A

For Radiated (below 1GHz) and Radiated (above 1GHz)/non-beamforming mode:

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	NB	DELL	E6230	N/A
B	Power supply	MAGA POWER	TVS 6007	N/A
C	Fiber converter	CISCO	SFP-10G-SR	N/A

For Radiated (above 1GHz)/beamforming mode:

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	NB	DELL	E6230	N/A
B	Power supply	MAGA POWER	TVS 6007	N/A
C	Fiber converter	CISCO	SFP-10G-SR	N/A
D	NB	DELL	E6230	N/A
E	WLAN module	Intel	BE200NGW	PD9BE200NG


**For RF Conducted/non-beamforming mode:**


Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	NB	DELL	E4300	N/A
B	Power supply	MAGA POWER	TVS 6007	N/A
C	Fiber converter	CISCO	SFP-10G-SR	N/A

For RF Conducted/beamforming mode:

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	NB	DELL	E4300	N/A
B	Power supply	MAGA POWER	TVS 6007	N/A
C	WLAN module	Intel	BE200NGW	PD9BE200NG
D	NB	DELL	E4300	N/A
E	Fiber converter	CISCO	SFP-10G-SR	N/A


2.6 Test Setup Diagram

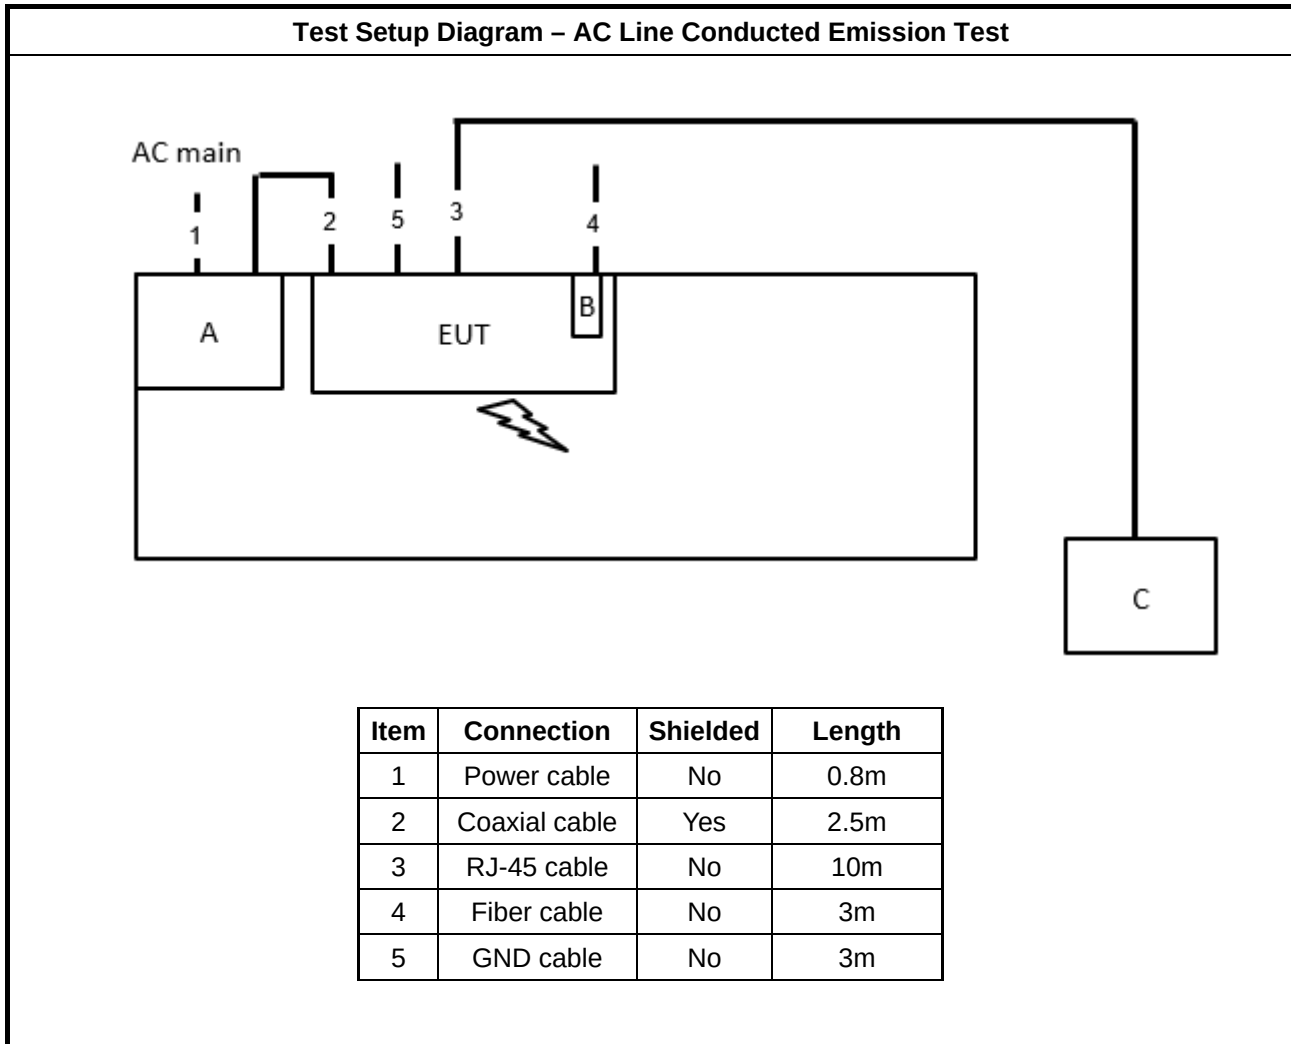

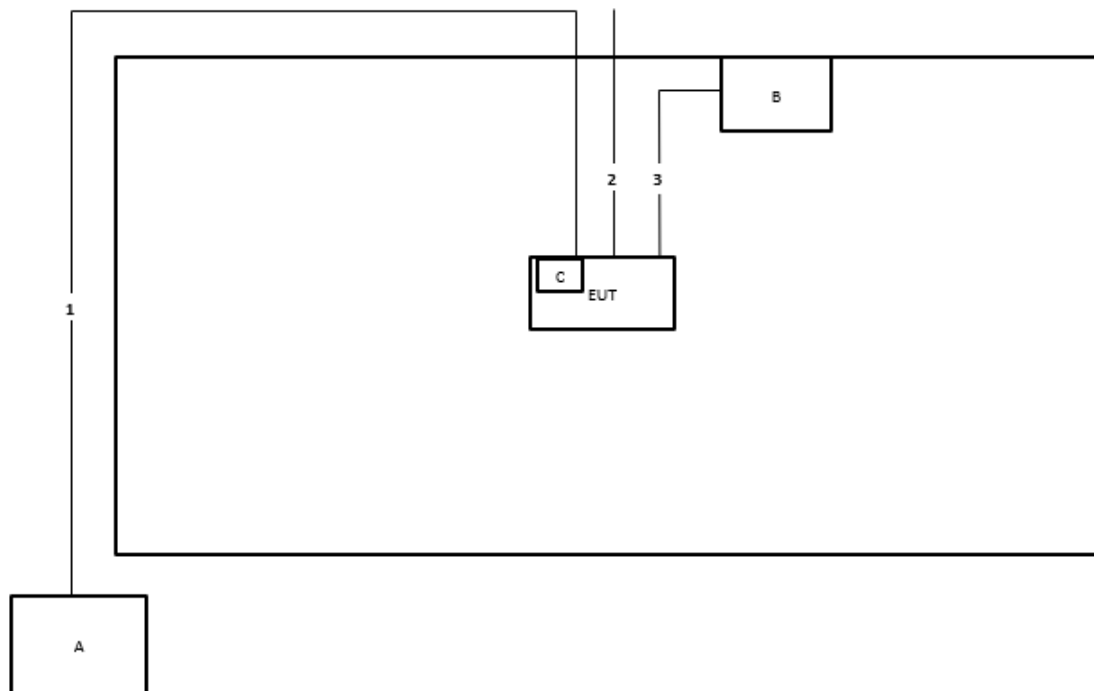Test Setup Diagram - Radiated Test < 1GHz


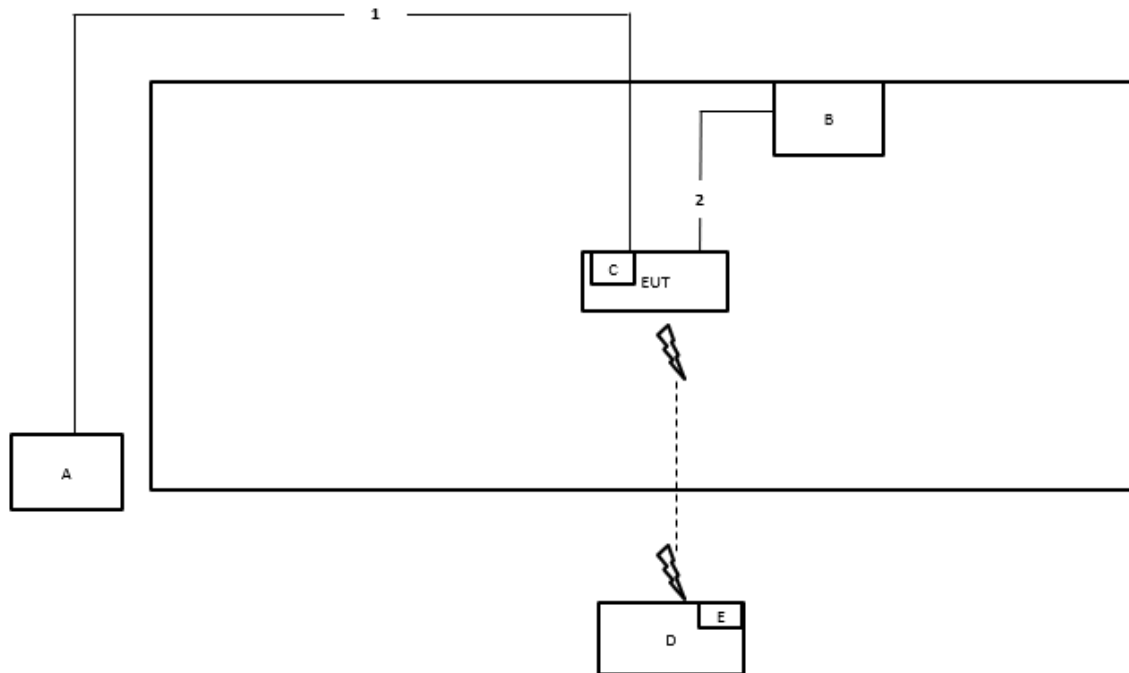
Item	Connection	Shielded	Length
1	RJ-45 cable	No	10m
2	GND cable	No	3m
3	Coaxial cable	Yes	2.5m

**Test Setup Diagram - Radiated Test > 1GHz
For non-beamforming mode**

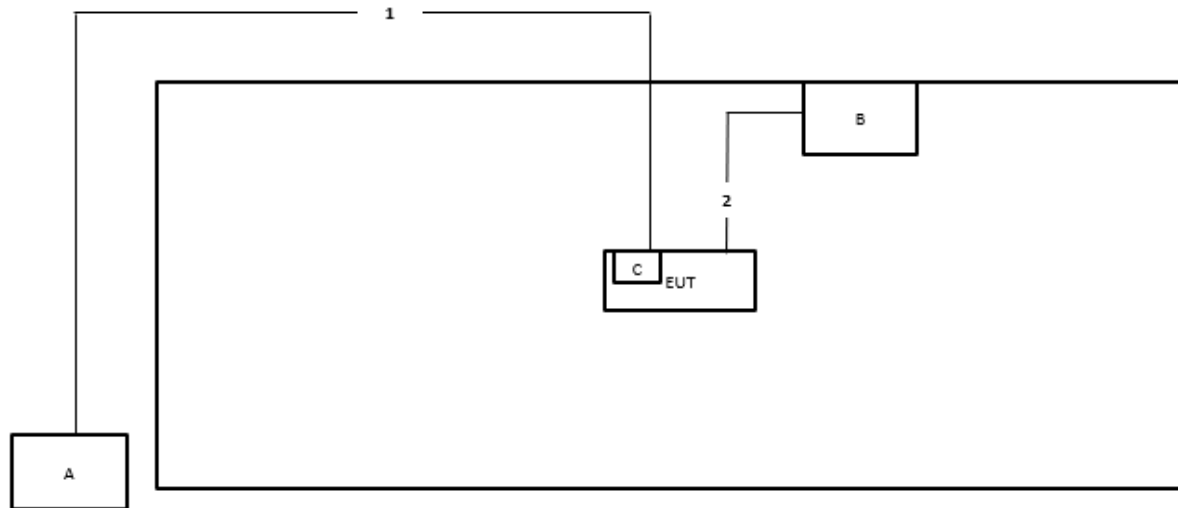

Item	Connection	Shielded	Length
1	RJ-45 cable	No	10m
2	Coaxial cable	Yes	2.5m

**Test Setup Diagram - Radiated Test > 1GHz
For beamforming mode**



Item	Connection	Shielded	Length
1	RJ-45 cable	No	10m
2	Coaxial cable	Yes	2.5m



3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

Test Method
☒ Refer as ANSI C63.10-2020, clause 6.2 for AC power-line conducted emissions.

3.1.4 Test Setup

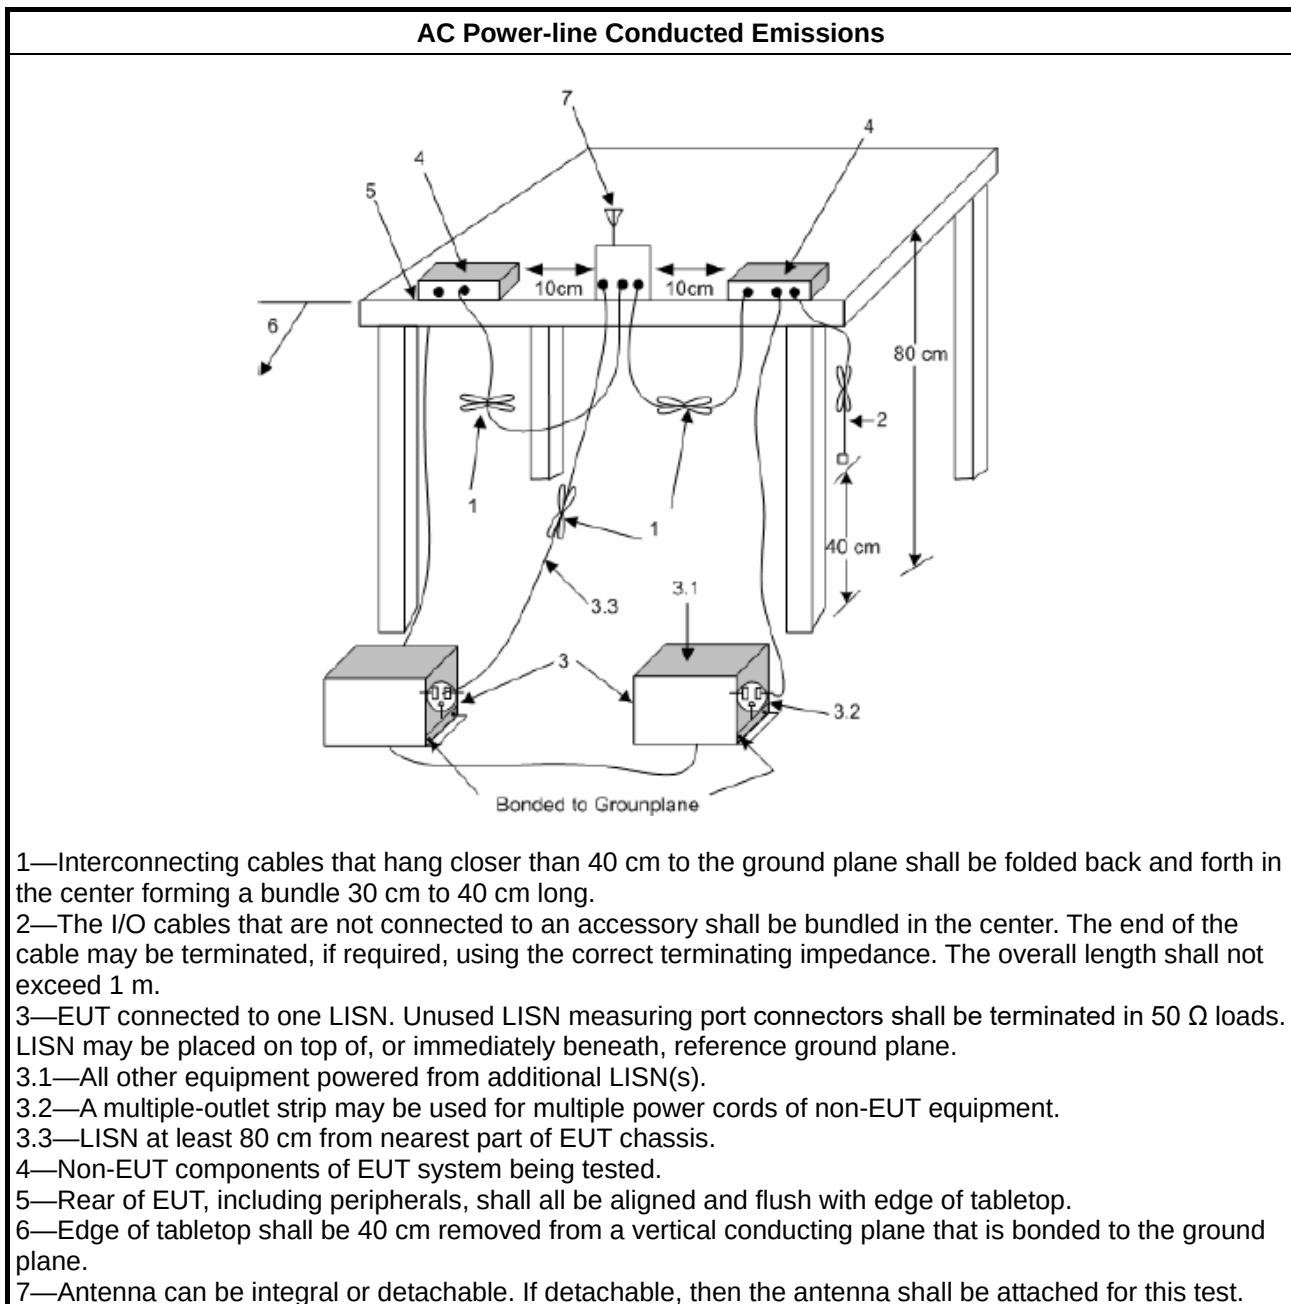

3.1.5 Measurement Results Calculation

The measured Level is calculated using:

- a. Corrected Reading: LISN Factor (LISN) + Attenuator (AT/AUX) + Cable Loss (CL) + Read Level (Raw) = Level
- b. Margin = -Limit + Level

3.1.6 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A

3.2 DTS Bandwidth

3.2.1 6dB Bandwidth Limit

6dB Bandwidth Limit
Systems using digital modulation techniques:
6 dB bandwidth $\geq$ 500 kHz.


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method
For the emission bandwidth shall be measured using one of the options below:
☒ Refer as FCC KDB 558074, clause 8.2 & C63.10 clause 11.8.1 Option 1 for 6 dB bandwidth measurement.
☐ Refer as FCC KDB 558074, clause 8.2 & C63.10 clause 11.8.2 Option 2 for 6 dB bandwidth measurement.
☐ Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.

3.2.4 Test Setup

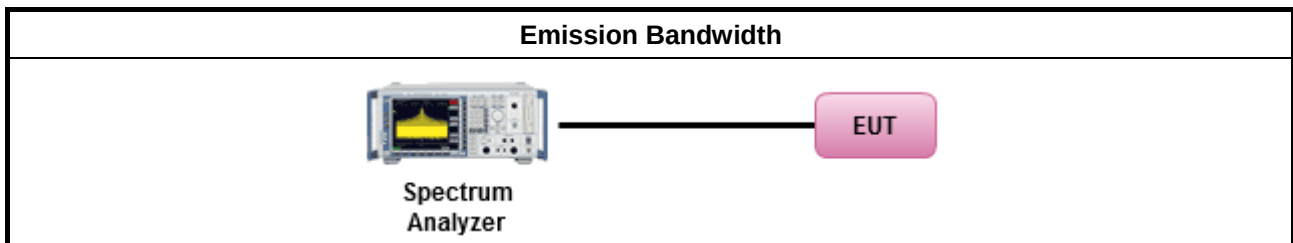

3.2.5 Test Result of Emission Bandwidth

Refer as Appendix B



3.3 Maximum Conducted Output Power

3.3.1 Maximum Conducted Output Power Limit

Maximum Conducted Output Power Limit	
	▪ If $G_{TX} \leq 6$ dBi, then $P_{Out} \leq 30$ dBm (1 W)
	▪ Point-to-multipoint systems (P2M): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ dBm
	▪ Point-to-point systems (P2P): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	▪ Smart antenna system (SAS):
	- Single beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	- Overlap beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	- Aggregate power on all beams: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3 + 8$ dB dBm
P_{Out} = maximum peak conducted output power or maximum conducted output power in dBm, G_{TX} = the maximum transmitting antenna directional gain in dBi.	


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method	
Maximum Peak Conducted Output Power	
☐	Refer as FCC KDB 558074, clause 8.3.1.1 & C63.10 clause 11.9.1.1 (RBW ≥ EBW method).
☐	Refer as FCC KDB 558074, clause 8.3.1.3 & C63.10 clause 11.9.1.3 (peak power meter).
Maximum Conducted Output Power	
	[duty cycle ≥ 98% or external video / power trigger]
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.2 Method AVGSA-1.
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.3 Method AVGSA-1A. (alternative)
	duty cycle < 98% and average over on/off periods with duty factor
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.4 Method AVGSA-2.
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.5 Method AVGSA-2A (alternative)
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.6 Method AVGSA-3
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.7 Method AVGSA-3A (alternative)
	Measurement using a power meter (PM)
☐	Refer as FCC KDB 558074, clause 8.3.2.3 & C63.10 clause 11.9.2.3.1 Method AVGPM (using an RF average power meter).
☒	Refer as FCC KDB 558074, clause 8.3.2.3 & C63.10 clause 11.9.2.3.2 Method AVGPM-G (using an gate RF average power meter).
For conducted measurement.	
If the EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.	
If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$	

3.3.4 Test Setup

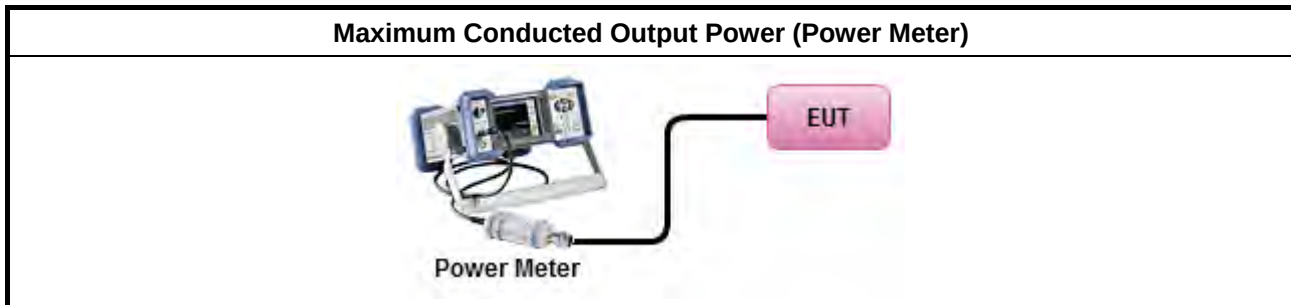

3.3.5 Test Result of Maximum Conducted Output Power

Refer as Appendix C



3.4 Power Spectral Density

3.4.1 Power Spectral Density Limit

Power Spectral Density Limit
▪ Power Spectral Density (PSD) ≤ 8 dBm/3kHz


3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

Test Method	
▪ Peak power spectral density procedures that the same method as used to determine the conducted output power. If maximum peak conducted output power was measured to demonstrate compliance to the output power limit, then the peak PSD procedure below (Method PKPSD) shall be used. If maximum conducted output power was measured to demonstrate compliance to the output power limit, then one of the average PSD procedures shall be used, as applicable based on the following criteria (the peak PSD procedure is also an acceptable option).	
☒	Refer as FCC KDB 558074, clause 8.4 & C63.10 clause 11.10 Method Max. PSD.
▪ For conducted measurement.	
▪ If The EUT supports multiple transmit chains using options given below:	
☒	Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.
☐	Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits,
☐	Option 3: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.

3.4.4 Test Setup

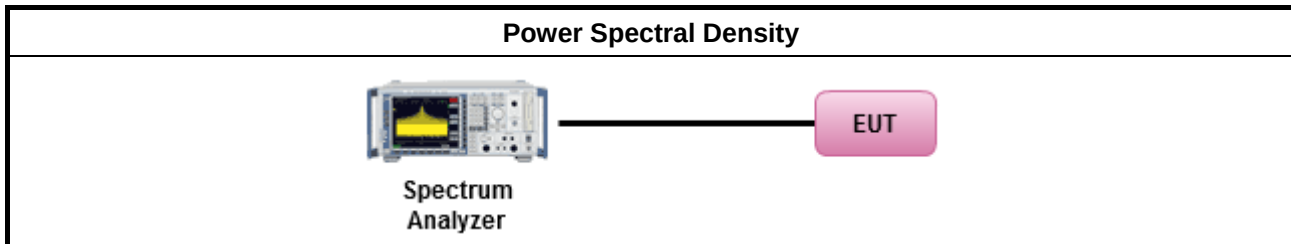

3.4.5 Test Result of Power Spectral Density

Refer as Appendix D

3.5 Emissions in Non-restricted Frequency Bands

3.5.1 Emissions in Non-restricted Frequency Bands Limit

Un-restricted Band Emissions Limit	
RF output power procedure	Limit (dBc)
Peak output power procedure	20
Average output power procedure	30
Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level. Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.	


3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

Test Method
Refer as FCC KDB 558074, clause 8.5 for unwanted emissions into non-restricted bands.

3.5.4 Test Setup

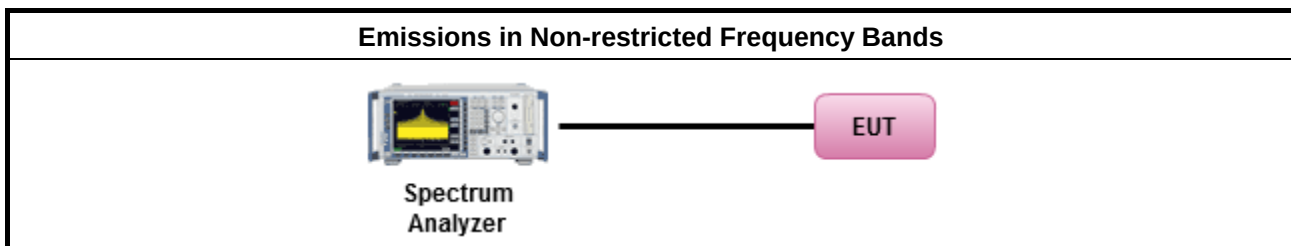

3.5.5 Test Result of Emissions in Non-restricted Frequency Bands

Refer as Appendix E



3.6 Emissions in Restricted Frequency Bands

3.6.1 Emissions in Restricted Frequency Bands Limit

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m.

3.6.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.




3.6.3 Test Procedures

Test Method	
▪ The average emission levels shall be measured in [duty cycle ≥ 98 or duty factor].	
▪ Refer as ANSI C63.10, clause 6.10.3 band-edge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.	
▪ For the transmitter unwanted emissions shall be measured using following options below:	
	▪ Refer as FCC KDB 558074, clause 8.6 for unwanted emissions into restricted bands.
	☐ Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.5.1(trace averaging for duty cycle $\geq 98\%$).
	☐ Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.5.2(trace averaging + duty factor).
	☒ Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.5.3(Reduced VBW $\geq 1/T$).
	☐ Refer as ANSI C63.10, clause 11.12.2.5.3 (Reduced VBW). VBW $\geq 1/T$, where T is pulse time.
	☐ Refer as ANSI C63.10, clause 7.5 average value of pulsed emissions.
	☒ Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.4 measurement procedure peak limit.
▪ For the transmitter band-edge emissions shall be measured using following options below:	
	▪ Refer as FCC KDB 558074 clause 8.7 & C63.10 clause 11.13.1, When the performing peak or average radiated measurements, emissions within 2 MHz of the authorized band edge may be measured using the marker-delta method described below.
	▪ Refer as FCC KDB 558074, clause 8.7 (ANSI C63.10, clause 6.10.6) for marker-delta method for band-edge measurements.
	▪ Refer as FCC KDB 558074, clause 8.7 for narrower resolution bandwidth (100kHz) using the band power and summing the spectral levels (i.e., 1 MHz).
	▪ For conducted unwanted emissions into restricted bands (absolute emission limits). Devices with multiple transmit chains using options given below: (1) Measure and sum the spectra across the outputs or (2) Measure and add 10 log(N) dB
	▪ For FCC KDB 662911 The methodology described here may overestimate array gain, thereby resulting in apparent failures to satisfy the out-of-band limits even if the device is actually compliant. In such cases, compliance may be demonstrated by performing radiated tests around the frequencies at which the apparent failures occurred.

3.6.4 Test Setup

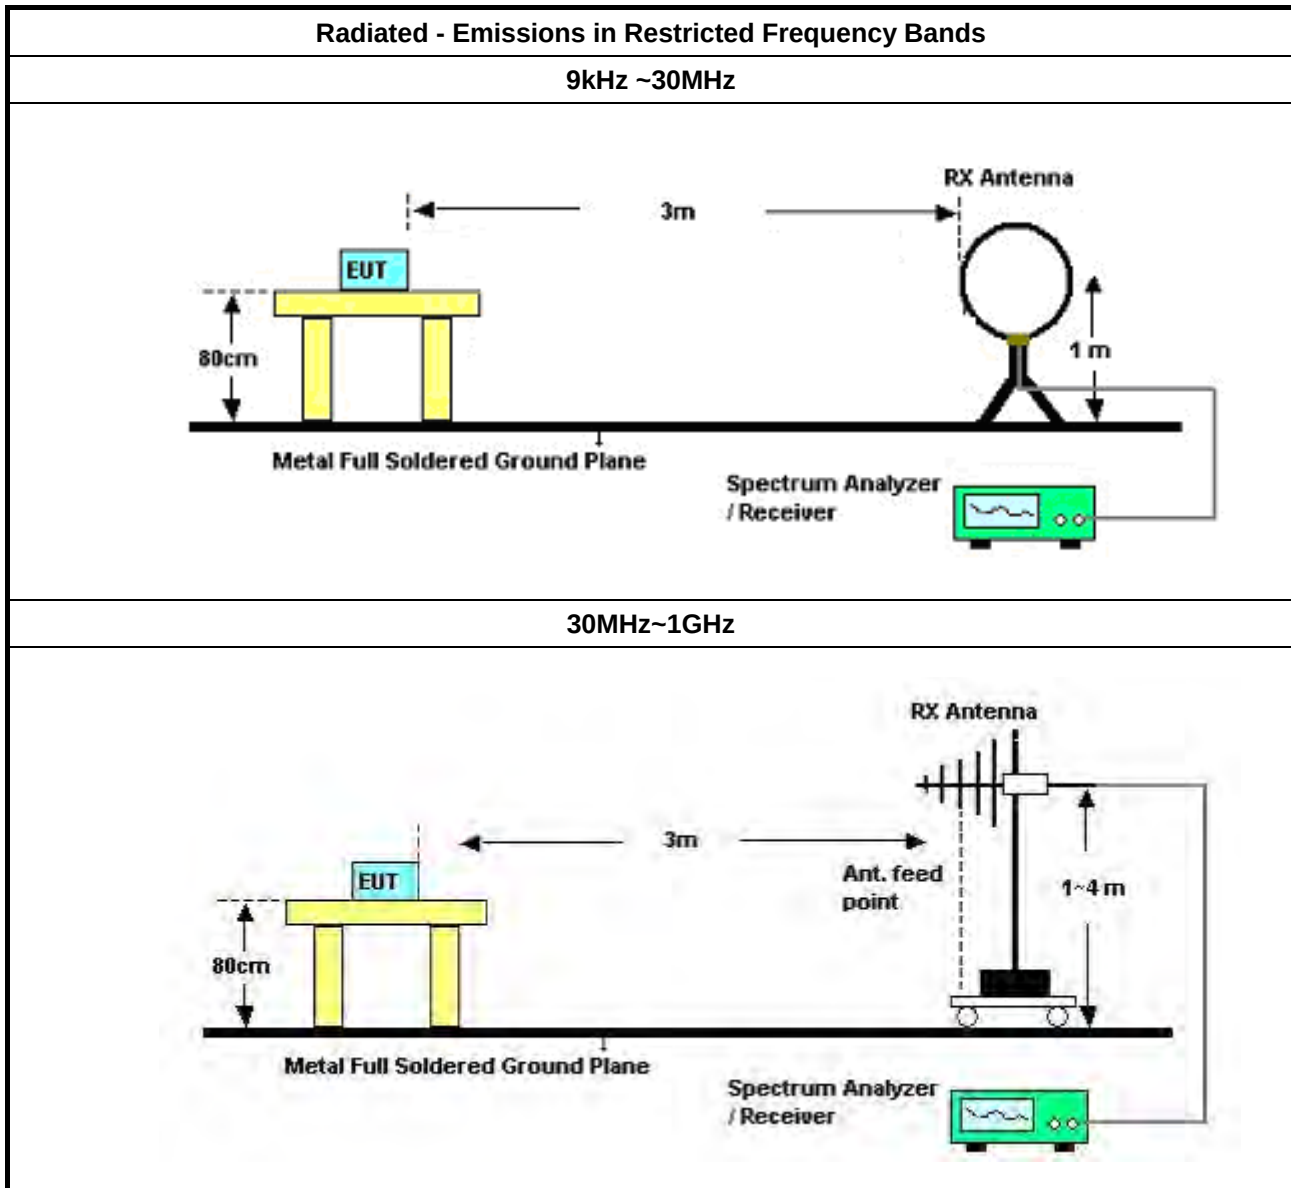

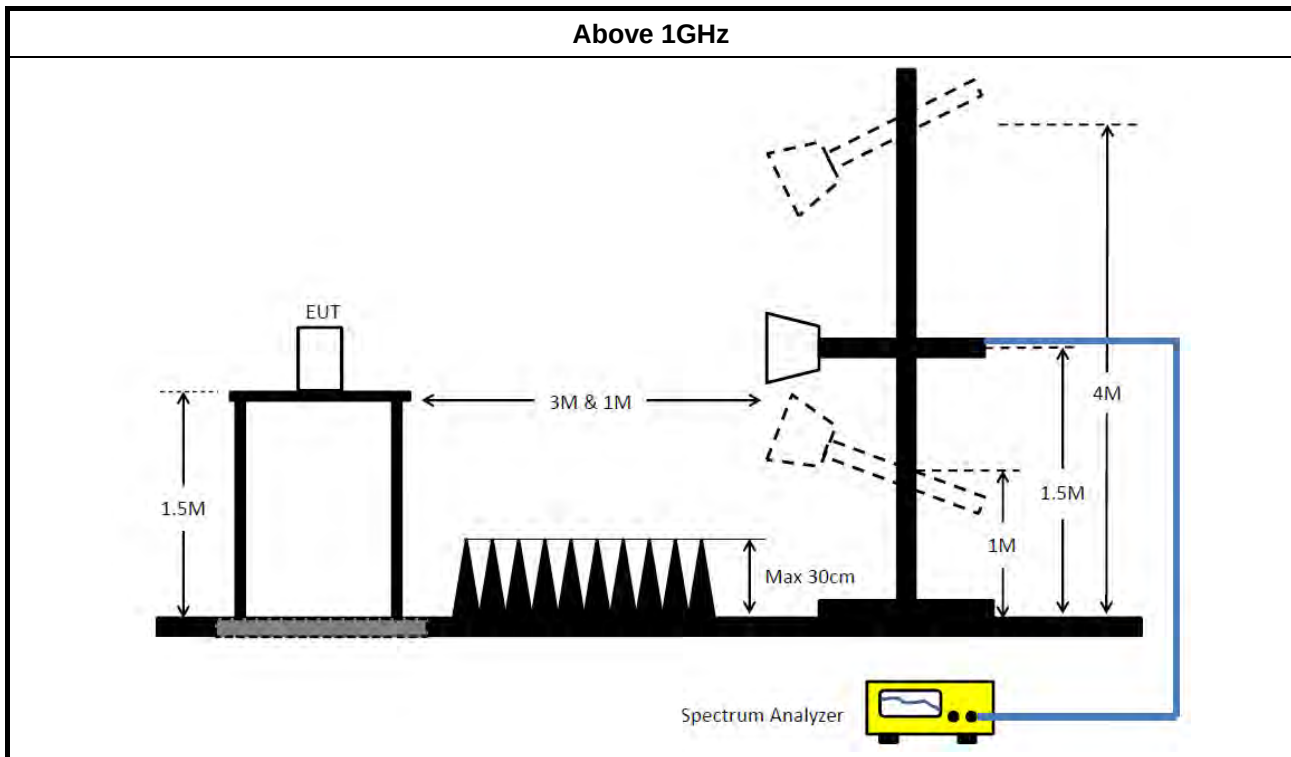

3.6.5 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Antenna factor (AF) + Cable loss (CL) + Read level (Raw) - Preamp factor (PA)(if applicable) = Level.

3.6.6 Emissions in Restricted Frequency Bands (Below 30MHz)

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to KDB414788 Radiated Test Site, and the result came out very similar.

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

The radiated emissions were investigated from 9 kHz or the lowest frequency generated within the device, up to the 10th harmonic or 40 GHz, whichever is appropriate.

3.6.7 Test Result of Emissions in Restricted Frequency Bands

Refer as Appendix F



4 Test Equipment and Calibration Data

Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
EMI Receiver	Agilent	N9038A	My52260123	9kHz ~ 8.4GHz	Mar. 06, 2025	Mar. 05, 2026	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Feb. 18, 2025	Feb. 17, 2026	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	May 10, 2025	May 09, 2026	Conduction (CO01-CB)
Pulse Limiter	Rohde& Schwarz	ESH3-Z2	100430	9kHz ~ 30MHz	Oct. 16, 2024	Oct. 15, 2025	Conduction (CO01-CB)
COND Cable	Woken	Cable	CO01	9kHz ~ 30MHz	Oct. 16, 2024	Oct. 15, 2025	Conduction (CO01-CB)
Test Software	SPORTON	SENSE-EMI	V5.11	150kHz-30MHz	N.C.R.	N.C.R.	Conduction (CO01-CB)
3m Semi Anechoic Chamber NSA	TDK	SAC-3M	03CH05-CB	30 MHz ~ 1 GHz	Jul. 31, 2025	Jul. 30, 2026	Radiation (03CH05-CB)
Loop Antenna	Teseq	HLA 6121	65417	9kHz - 30MHz	Oct. 17, 2024	Oct. 16, 2025	Radiation (03CH05-CB)
Bilog Antenna with 6dB Attenuator	TESEQ & EMCI	CBL 6112D & N-6-06	35236 & AT-N0610	30MHz ~ 2GHz	Mar. 22, 2025	Mar. 21, 2026	Radiation (03CH05-CB)
Amplifier	EMCI	EMC330N	980331	20MHz ~ 3GHz	May 01, 2025	Apr. 30, 2026	Radiation (03CH05-CB)
Spectrum Analyzer	R&S	FSP40	100304	9kHz ~ 40GHz	Apr. 21, 2025	Apr. 20, 2026	Radiation (03CH05-CB)
EMI Test Receiver	R&S	ESR7	102172	9kHz ~ 7GHz	Oct. 21, 2024	Oct. 20, 2025	Radiation (03CH05-CB)
RF Cable-low	Woken	RG402	Low Cable-04+23	30MHz~1GHz	Oct. 01, 2024	Sep. 30, 2025	Radiation (03CH05-CB)
Test Software	SPORTON	SENSE-EMI	V5.11.8	30MHz-40GHz	N.C.R.	N.C.R.	Radiation (03CH05-CB)
3m Semi Anechoic Chamber VSWR	RIKEN	SAC-3M	03CH02-CB	1GHz ~18GHz	Mar. 23, 2025	Mar. 22, 2026	Radiation (03CH02-CB)
Horn Antenna	EMCO	3115	9610-4976	1GHz ~ 18GHz	Apr. 15, 2025	Apr. 14, 2026	Radiation (03CH02-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Sep. 23, 2024	Sep. 22, 2025	Radiation (03CH02-CB)
Pre-Amplifier	Agilent	83017A	MY39501305	1GHz ~ 26.5GHz	Jun. 29, 2024	Jun. 28, 2025	Radiation (03CH02-CB)
Signal Analyzer	R&S	FSV3044	101536	10kHz ~ 44GHz	Aug. 14, 2024	Aug. 13, 2025	Radiation (03CH02-CB)
RF Cable-high	Woken	RG402	High Cable-18	1GHz ~ 18GHz	Jun. 20, 2024	Jun. 19, 2025	Radiation (03CH02-CB)
RF Cable-high	Woken	RG402	High Cable-18+19	1GHz ~ 18GHz	Jun. 20, 2024	Jun. 19, 2025	Radiation (03CH02-CB)



Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
High Cable	Woken	WCA0929M	40G#5+6	1GHz ~ 40 GHz	Apr. 30, 2025	Apr. 29, 2026	Radiation (03CH02-CB)
Test Software	SPORTON	SENSE-15247_DTS	V5.11.25	2.4GHz-2.4835GHz	N.C.R.	N.C.R.	Radiation (03CH02-CB)
3m Semi Anechoic Chamber VSWR	TDK	SAC-3M	03CH06-CB	1GHz ~18GHz 3m	Oct. 08, 2024	Oct. 07, 2025	Radiation (03CH06-CB)
Bilog Antenna with 6 dB attenuator	TESEQ & EMCI	CBL6112D & N-6-06	37878 & AT-N0606	20MHz ~ 2GHz	Jul. 29, 2024	Jul. 28, 2025	Radiation (03CH06-CB)
Horn Antenna	SCHWARZBECK	BBHA9120D	BBHA 9120D-1292	1GHz~18GHz	Jul. 29, 2024	Jul. 28, 2025	Radiation (03CH06-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Sep. 23, 2024	Sep. 22, 2025	Radiation (03CH06-CB)
Pre-Amplifier	EMCI	EMC12630SE	980383	1GHz ~ 18GHz	Jul. 31, 2024	Jul. 30, 2025	Radiation (03CH06-CB)
Pre-Amplifier	SGH	SGH184	20221107-3	18GHz ~ 40GHz	Nov. 25, 2024	Nov. 24, 2025	Radiation (03CH06-CB)
Signal analyzer	R&S	FSV3044	101667	9kHz~44GHz	Aug. 20, 2024	Aug. 19, 2025	Radiation (03CH06-CB)
RF Cable-high	Woken	RG402	High Cable-05+68	1GHz~18GHz	Oct. 01, 2024	Sep. 30, 2025	Radiation (03CH06-CB)
High Cable	Woken	WCA0929M	40G#5+6	1GHz ~ 40 GHz	Apr. 30, 2025	Apr. 29, 2026	Radiation (03CH06-CB)
Test Software	SPORTON	SENSE-EMI	V5.11.8	30MHz-40GHz	N.C.R.	N.C.R.	Radiation (03CH06-CB)
Spectrum analyzer	R&S	FSV40	101027	9kHz~40GHz	Aug. 27, 2024	Aug. 26, 2025	Conducted (TH02-CB)
Power Sensor	Anritsu	MA2411B	1126203	300MHz~40GHz	Oct. 18, 2024	Oct. 17, 2025	Conducted (TH02-CB)
Power Meter	Anritsu	ML2495A	1210004	300MHz~40GHz	Oct. 18, 2024	Oct. 17, 2025	Conducted (TH02-CB)
RF Cable-high	Woken	RG402	High Cable-01	1 GHz – 18 GHz	Oct. 01, 2024	Sep. 30, 2025	Conducted (TH02-CB)
RF Cable-high	Woken	RG402	High Cable-02	1 GHz – 18 GHz	Oct. 01, 2024	Sep. 30, 2025	Conducted (TH02-CB)
RF Cable-high	Woken	RG402	High Cable-03	1 GHz – 18 GHz	Oct. 01, 2024	Sep. 30, 2025	Conducted (TH02-CB)
RF Cable-high	Woken	RG402	High Cable-04	1 GHz – 18 GHz	Oct. 01, 2024	Sep. 30, 2025	Conducted (TH02-CB)
RF Cable-high	Woken	RG402	High Cable-05	1 GHz – 18 GHz	Oct. 01, 2024	Sep. 30, 2025	Conducted (TH02-CB)
Switch	SPTCB	SP-SWI	SWI-02	1~18 GHz	Oct. 02, 2024	Oct. 01, 2025	Conducted (TH02-CB)
Test Software	SPORTON	SENSE-15247_DTS	V5.11.25	2.4GHz-2.4835GHz	N.C.R.	N.C.R.	Conducted (TH02-CB)

Note: Calibration Interval of instruments listed above is one year.

NCR means Non-Calibration required.




Conducted Emissions at Powerline

Appendix A

Summary


Mode	Result	Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Condition
Mode 2	Pass	QP	163.5k	48.05	65.27	-17.22	Line

Mode 2

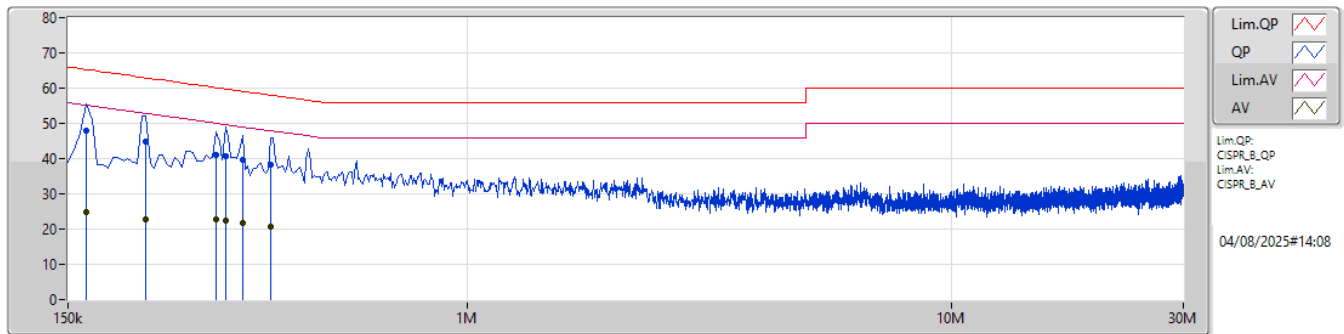

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	PA (dB)	AT (dB)				
QP	163.5k	48.05	65.27	-17.22	10.05	Line	"Worst"	38.00	0.05	0.08	-	9.92				
AV	163.5k	24.95	55.27	-30.32	10.05	Line	-	14.90	0.05	0.08	-	9.92				
QP	217.5k	44.91	62.92	-18.01	10.09	Line	-	34.82	0.06	0.07	-	9.96				
AV	217.5k	22.91	52.92	-30.01	10.09	Line	-	12.82	0.06	0.07	-	9.96				
QP	303k	41.12	60.17	-19.05	10.16	Line	-	30.96	0.05	0.09	-	10.02				
AV	303k	22.93	50.17	-27.24	10.16	Line	-	12.77	0.05	0.09	-	10.02				
QP	316.5k	40.67	59.80	-19.13	10.16	Line	-	30.51	0.05	0.09	-	10.02				
AV	316.5k	22.50	49.80	-27.30	10.16	Line	-	12.34	0.05	0.09	-	10.02				
QP	343.5k	39.80	59.12	-19.32	10.18	Line	-	29.62	0.05	0.09	-	10.04				
AV	343.5k	21.71	49.12	-27.41	10.18	Line	-	11.53	0.05	0.09	-	10.04				
QP	393k	38.41	58.01	-19.60	10.21	Line	-	28.20	0.05	0.10	-	10.06				
AV	393k	20.65	48.01	-27.36	10.21	Line	-	10.44	0.05	0.10	-	10.06				

Mode 2

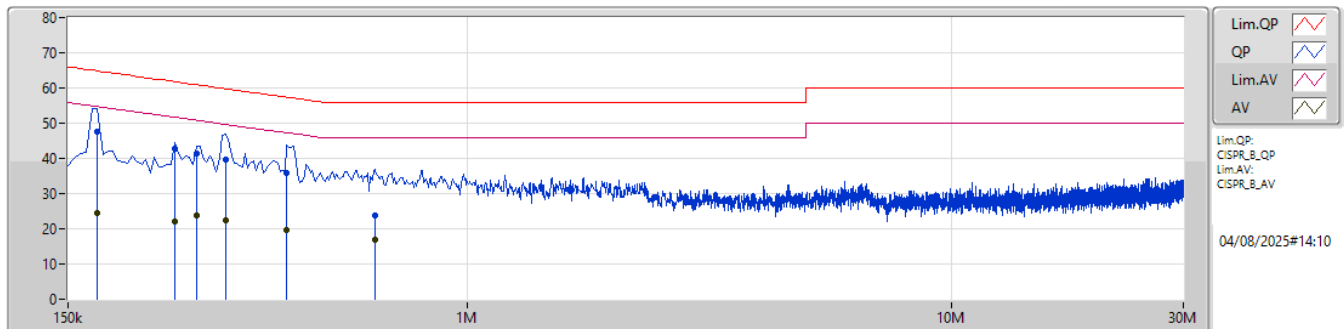

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	PA (dB)	AT (dB)				
QP	172.5k	47.55	64.83	-17.28	10.08	Neutral	"Worst"	37.47	0.08	0.07	-	9.93				
AV	172.5k	24.57	54.83	-30.26	10.08	Neutral	-	14.49	0.08	0.07	-	9.93				
QP	249k	42.77	61.79	-19.02	10.14	Neutral	-	32.63	0.08	0.08	-	9.98				
AV	249k	22.15	51.79	-29.64	10.14	Neutral	-	12.01	0.08	0.08	-	9.98				
QP	276k	41.30	60.93	-19.63	10.16	Neutral	-	31.14	0.08	0.08	-	10.00				
AV	276k	23.72	50.93	-27.21	10.16	Neutral	-	13.56	0.08	0.08	-	10.00				
QP	316.5k	39.82	59.80	-19.98	10.19	Neutral	-	29.63	0.08	0.09	-	10.02				
AV	316.5k	22.38	49.80	-27.42	10.19	Neutral	-	12.19	0.08	0.09	-	10.02				
QP	424.5k	35.69	57.36	-21.67	10.25	Neutral	-	25.44	0.08	0.10	-	10.07				
AV	424.5k	19.78	47.36	-27.58	10.25	Neutral	-	9.53	0.08	0.10	-	10.07				
QP	645k	23.67	56.00	-32.33	10.29	Neutral	-	13.38	0.09	0.09	-	10.11				
AV	645k	16.74	46.00	-29.26	10.29	Neutral	-	6.45	0.09	0.09	-	10.11				

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4-2.4835GHz	-	-	-	-	-
802.11b_Nss1,(1Mbps)_4TX	8.55M	12.071M	12M1G1D	6.6M	10.512M
802.11g_Nss1,(6Mbps)_4TX	16.55M	17.061M	17M1D1D	16.3M	16.62M
802.11be EHT20_Nss1,(MCS0)_4TX	19.1M	19.128M	19M1D1D	18.475M	18.998M
802.11be EHT20-BF_Nss1,(MCS0)_4TX	19.075M	19.04M	19M0D1D	3.025M	17.666M
802.11be EHT40_Nss1,(MCS0)_4TX	38.05M	37.908M	37M9D1D	36.3M	37.79M
802.11be EHT40-BF_Nss1,(MCS0)_4TX	35.15M	37.981M	38M0D1D	5.3M	36.982M

Max-N dB = Maximum 6dB down bandwidth; Max-OBW = Maximum 99% occupied bandwidth;
Min-N dB = Minimum 6dB down bandwidth; Min-OBW = Minimum 99% occupied bandwidth

Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)	Port 3-N dB (Hz)	Port 3-OBW (Hz)	Port 4-N dB (Hz)	Port 4-OBW (Hz)
802.11b_Nss1,(1Mbps)_4TX	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	500k	6.6M	10.895M	8.075M	11.192M	7.575M	10.574M	7.575M	10.727M
2437MHz	Pass	500k	8.55M	10.546M	8.075M	10.859M	8.525M	12.071M	8.55M	10.515M
2462MHz	Pass	500k	7.575M	10.771M	8.05M	11.077M	7.9M	10.512M	8.275M	10.728M
802.11g_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	500k	16.35M	16.69M	16.55M	16.62M	16.35M	16.658M	16.35M	16.678M
2437MHz	Pass	500k	16.35M	16.865M	16.375M	17.061M	16.35M	16.905M	16.325M	17.028M
2462MHz	Pass	500k	16.55M	16.686M	16.3M	16.634M	16.4M	16.645M	16.45M	16.629M
802.11be EHT20_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	500k	18.75M	19.02M	18.475M	19M	19.025M	19.042M	18.9M	18.998M
2437MHz	Pass	500k	19M	19.054M	18.65M	19.128M	18.95M	19.019M	18.725M	19.041M
2462MHz	Pass	500k	19M	19.013M	19.1M	19.052M	18.8M	19.012M	18.625M	19.023M
802.11be EHT40_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
2422MHz	Pass	500k	37.45M	37.79M	36.8M	37.839M	37.85M	37.895M	36.3M	37.843M
2437MHz	Pass	500k	37.9M	37.836M	37.9M	37.89M	37.3M	37.884M	37.8M	37.887M
2452MHz	Pass	500k	38.05M	37.839M	37.6M	37.844M	37.95M	37.887M	37.3M	37.908M
802.11be EHT20-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	500k	3.925M	18.791M	11.925M	18.691M	3.025M	18.616M	10.35M	18.716M
2437MHz	Pass	500k	18.55M	18.991M	16.25M	19.04M	19.075M	18.966M	18.875M	18.991M
2462MHz	Pass	500k	7.575M	18.641M	7.575M	18.791M	9.525M	17.666M	7.275M	18.416M
802.11be EHT40-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
2422MHz	Pass	500k	7.35M	36.982M	5.3M	37.281M	7.8M	37.031M	7.2M	37.081M
2437MHz	Pass	500k	26.1M	37.981M	35.15M	37.831M	22M	37.681M	31.55M	37.831M
2452MHz	Pass	500k	8.4M	37.281M	25.65M	37.731M	7.2M	37.581M	29.8M	37.331M



Port X-N dB = Port X 6dB down bandwidth;
Port X-OBW = Port X 99% occupied bandwidth

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

EBW

2412MHz

12/06/2025

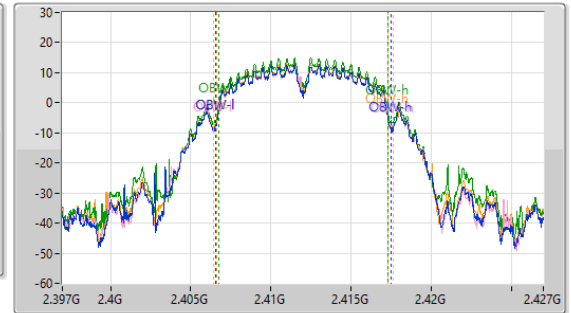
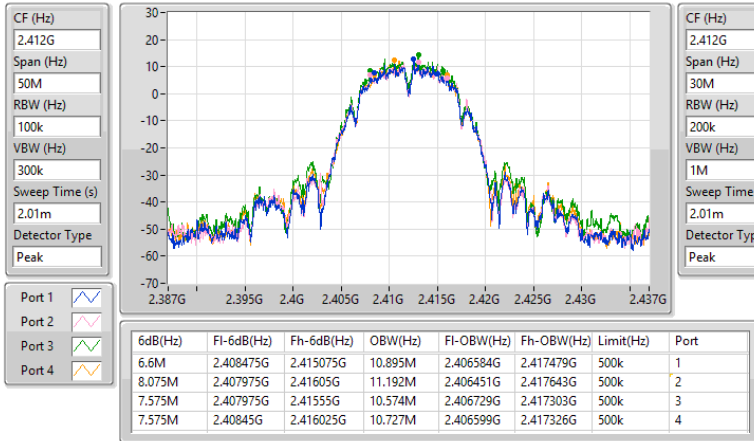


2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

EBW

2437MHz

12/06/2025

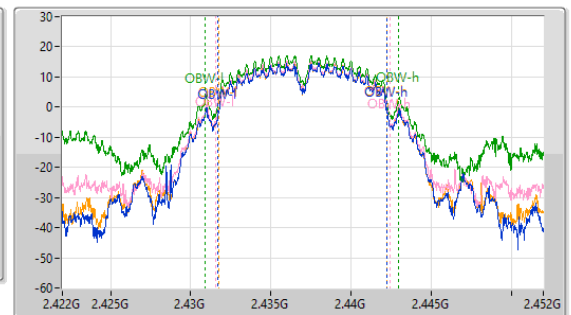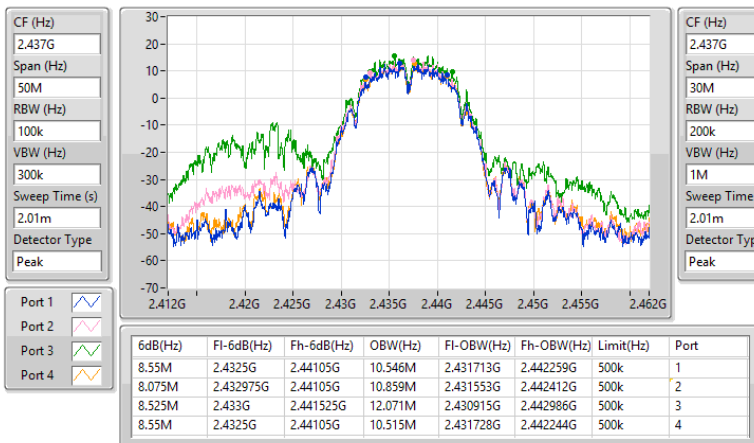


2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

EBW

2462MHz

12/06/2025

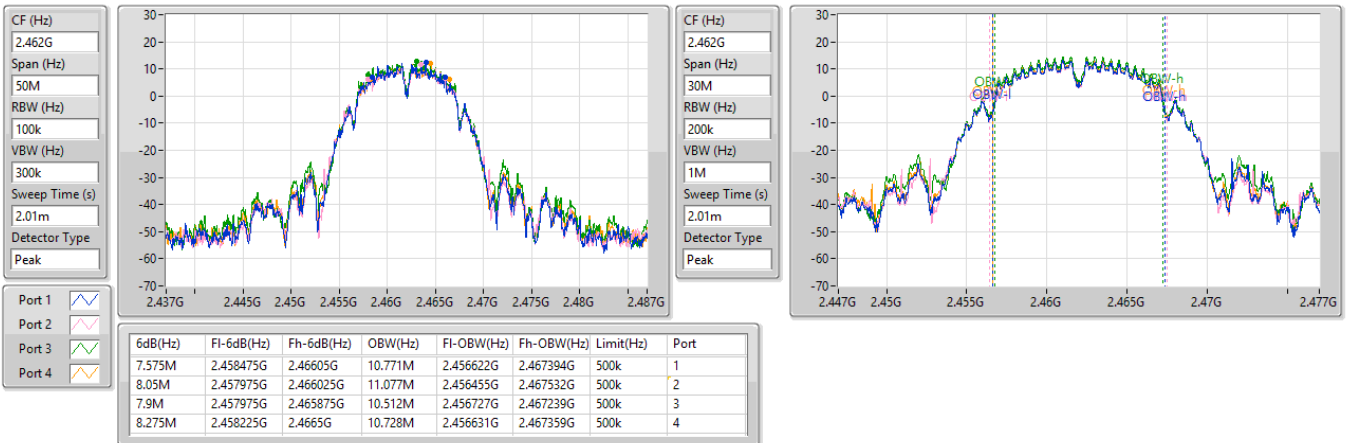


2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

EBW


2412MHz

12/06/2025

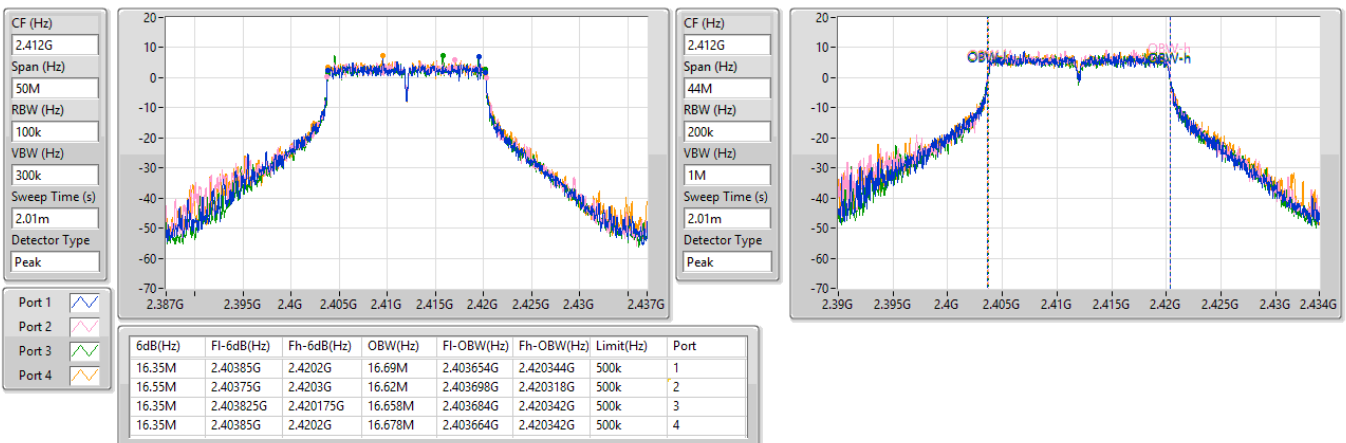


2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX
EBW
2437MHz

12/06/2025

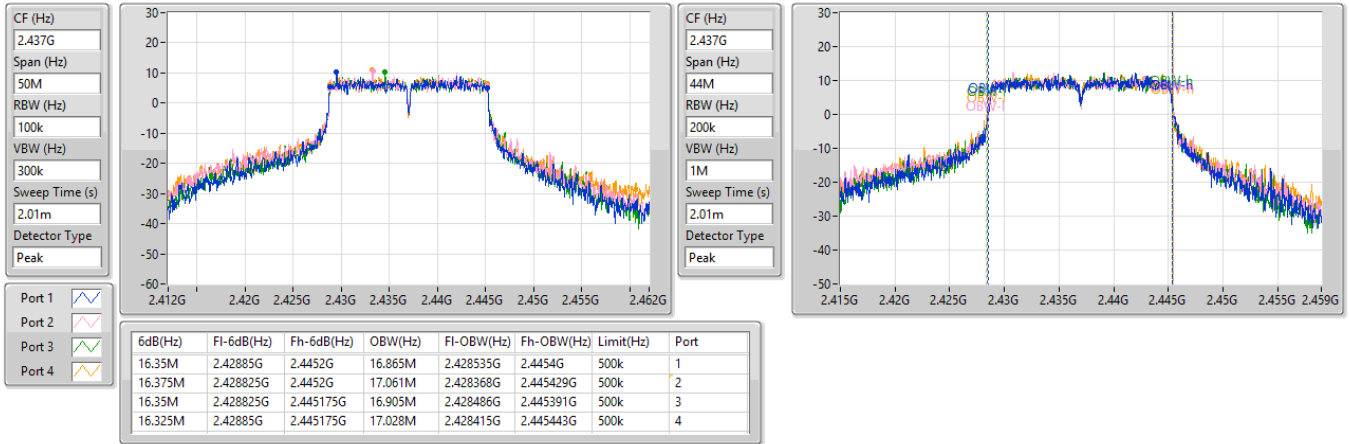
2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX
EBW
2462MHz

12/06/2025

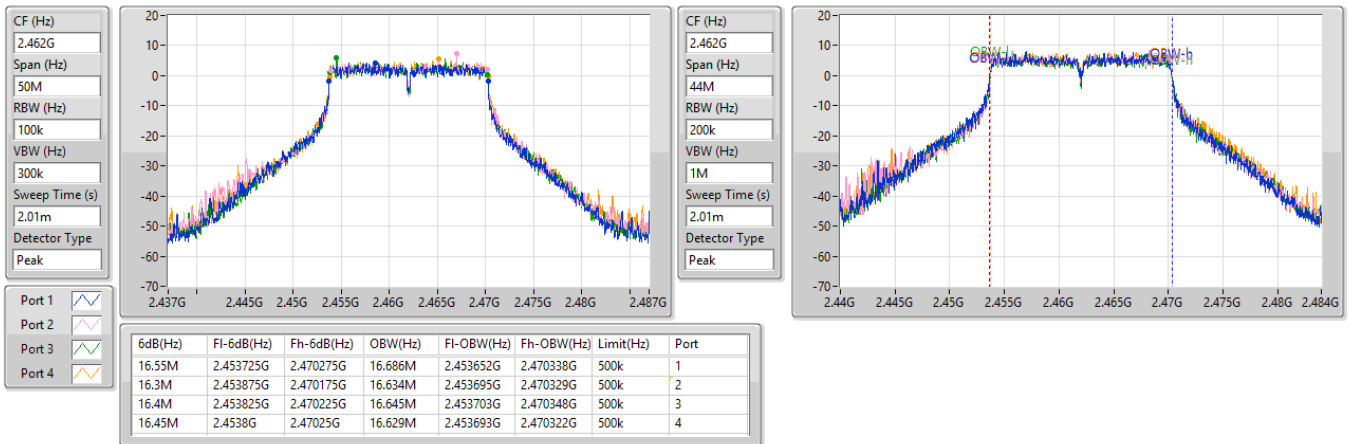


2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW

2412MHz

12/06/2025

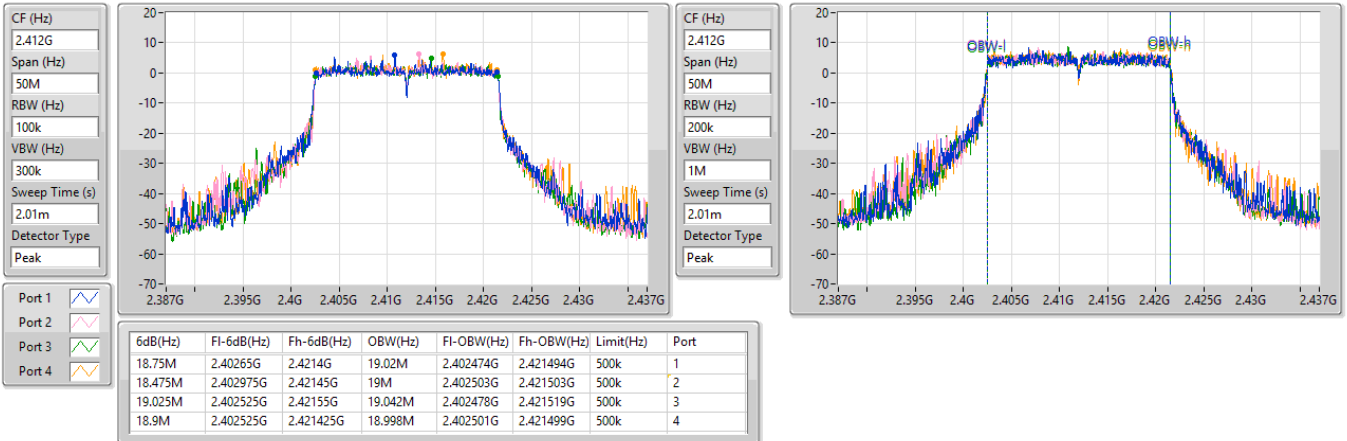


2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW

2437MHz

12/06/2025

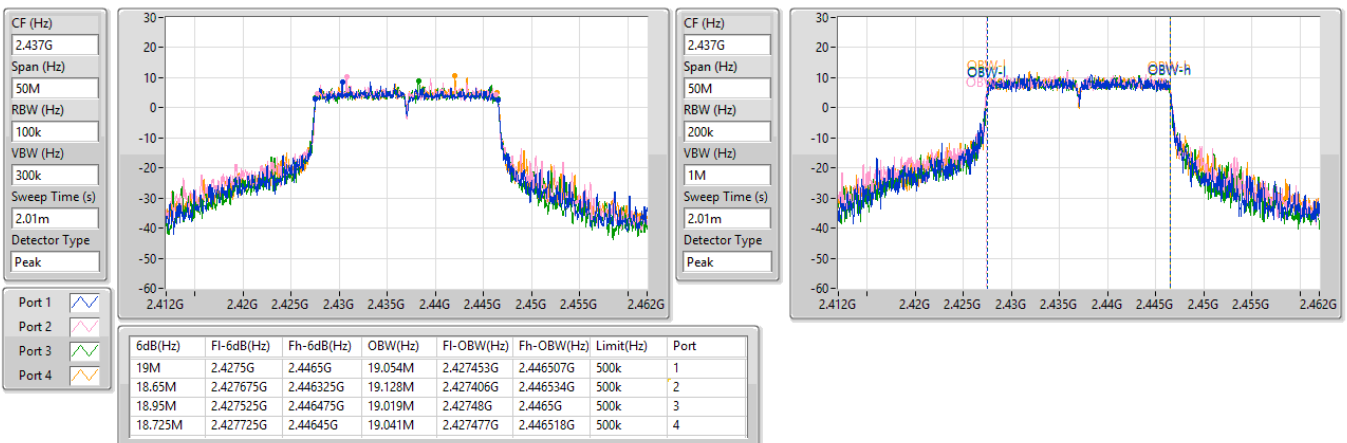


2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW

2462MHz

12/06/2025

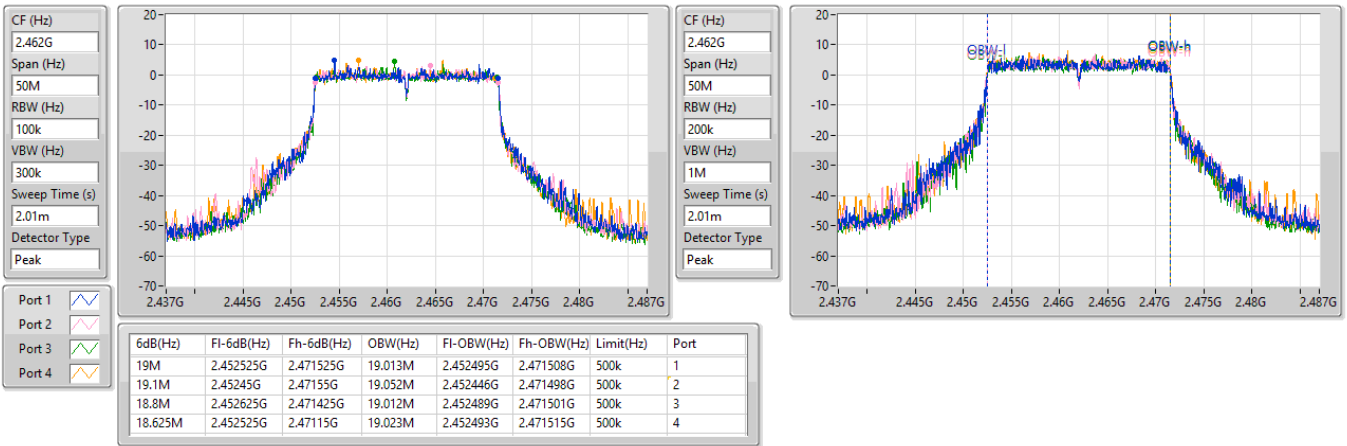


2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW

2422MHz

12/06/2025

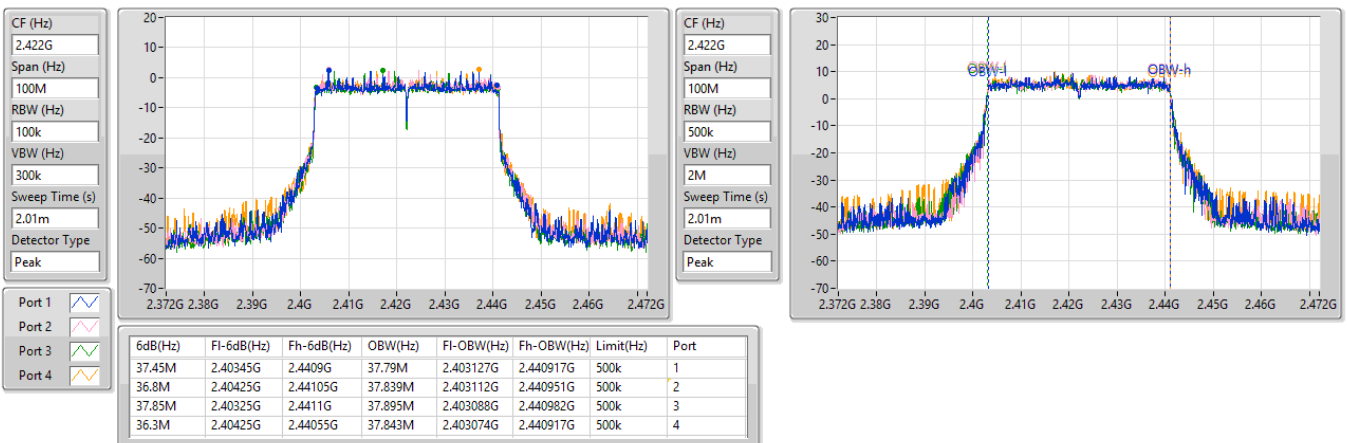


2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW

2437MHz

12/06/2025

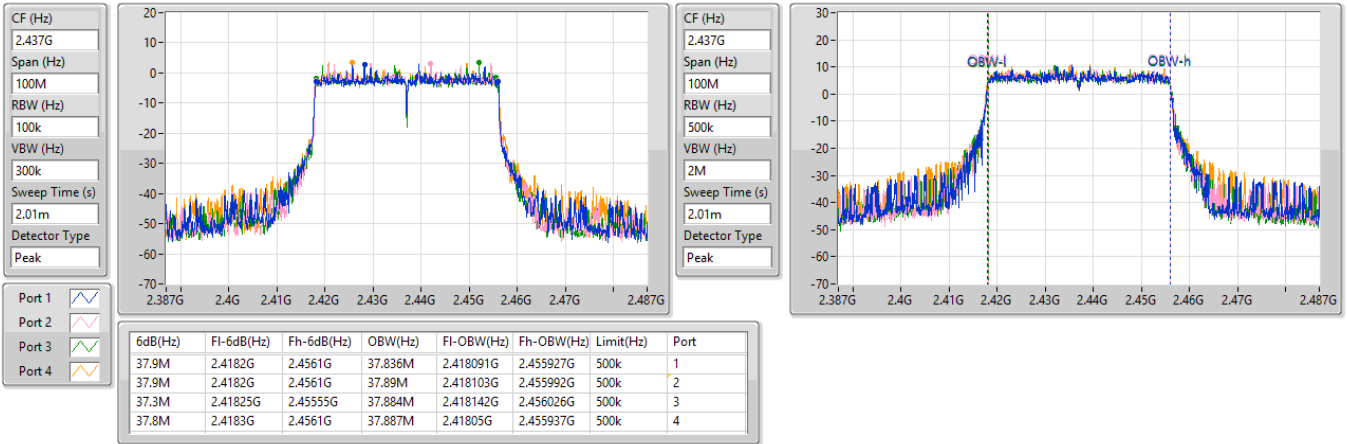


2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW

2452MHz

12/06/2025

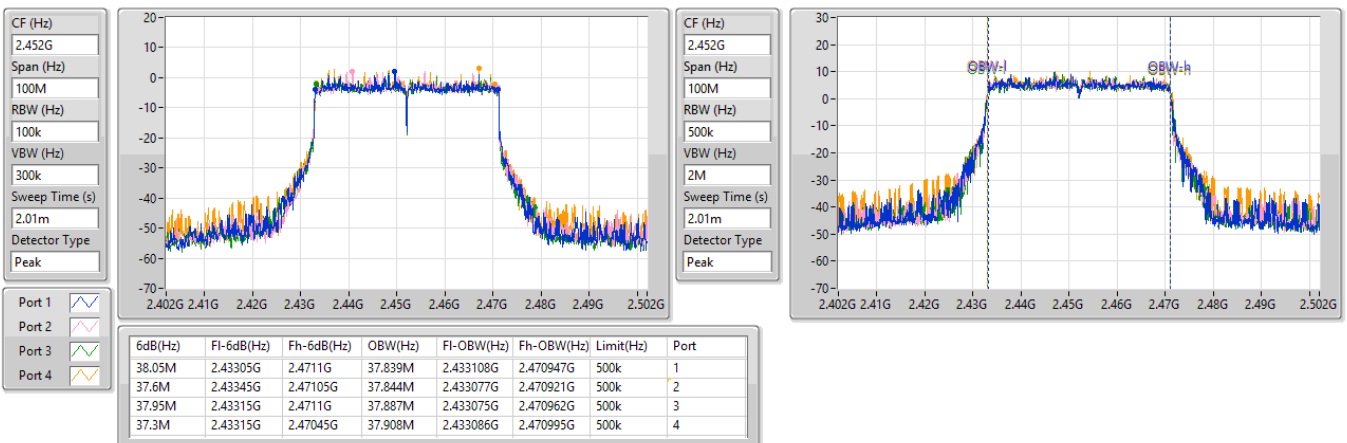


2.4-2.4835GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

EBW

2412MHz

09/07/2025

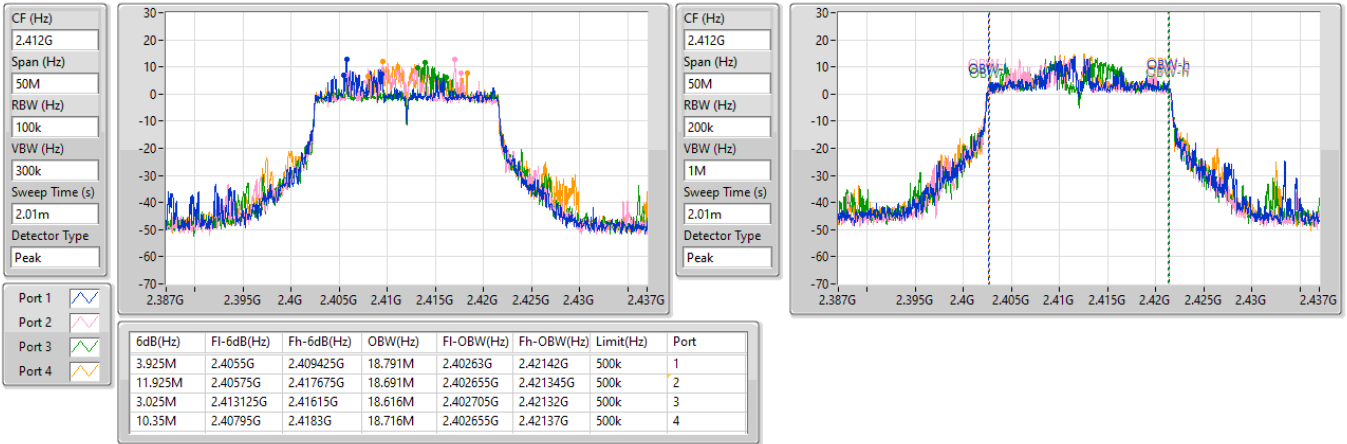


2.4-2.4835GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

EBW

2437MHz

09/07/2025

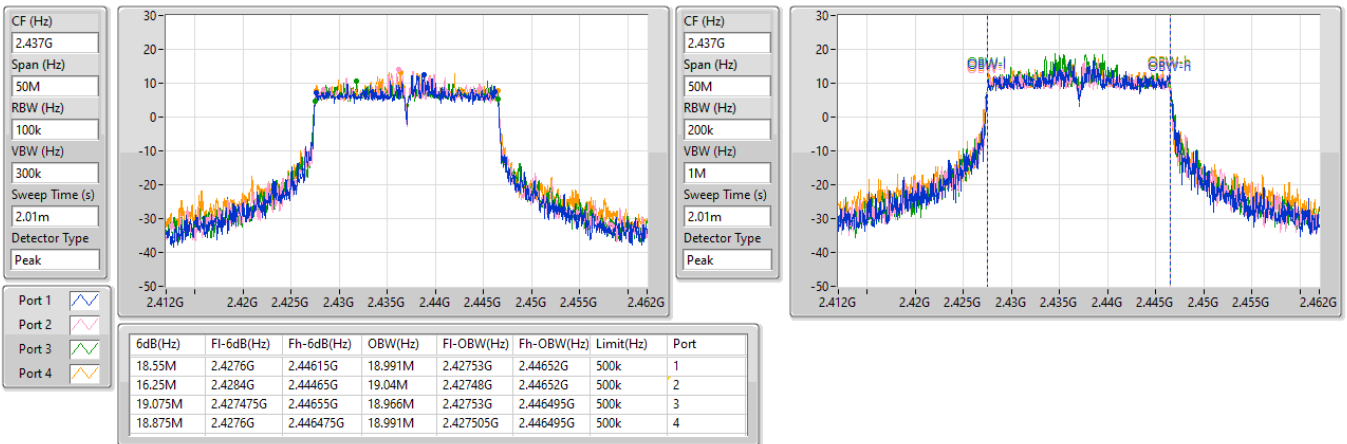


2.4-2.4835GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

EBW

2462MHz

09/07/2025

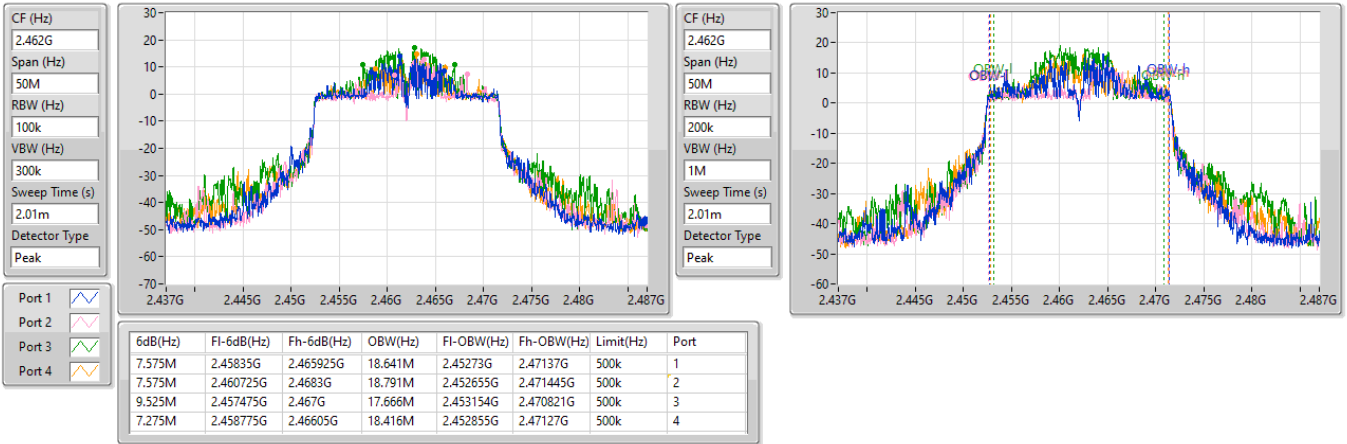


2.4-2.4835GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

EBW

2422MHz

09/07/2025

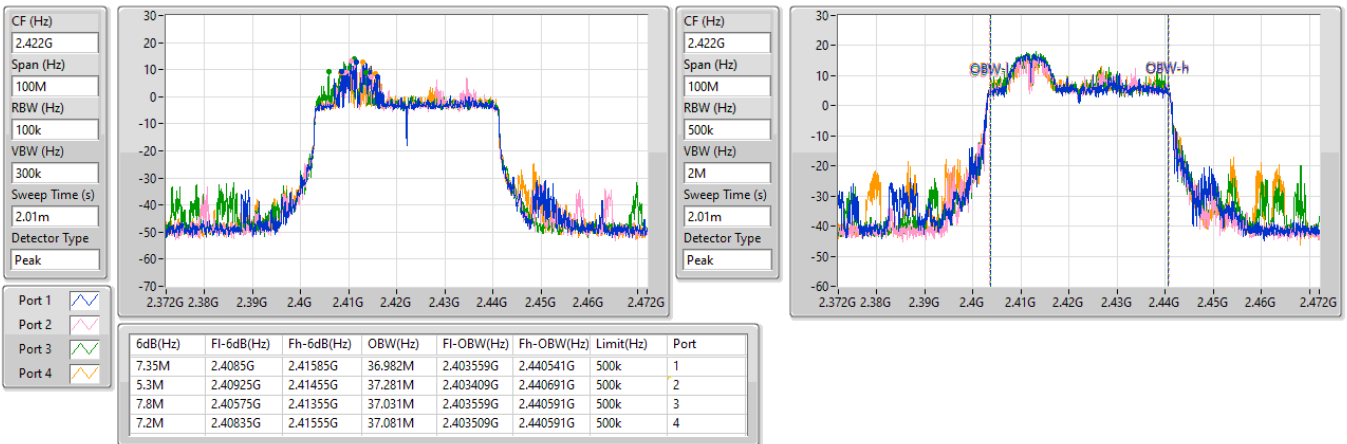


2.4-2.4835GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

EBW

2437MHz

09/07/2025

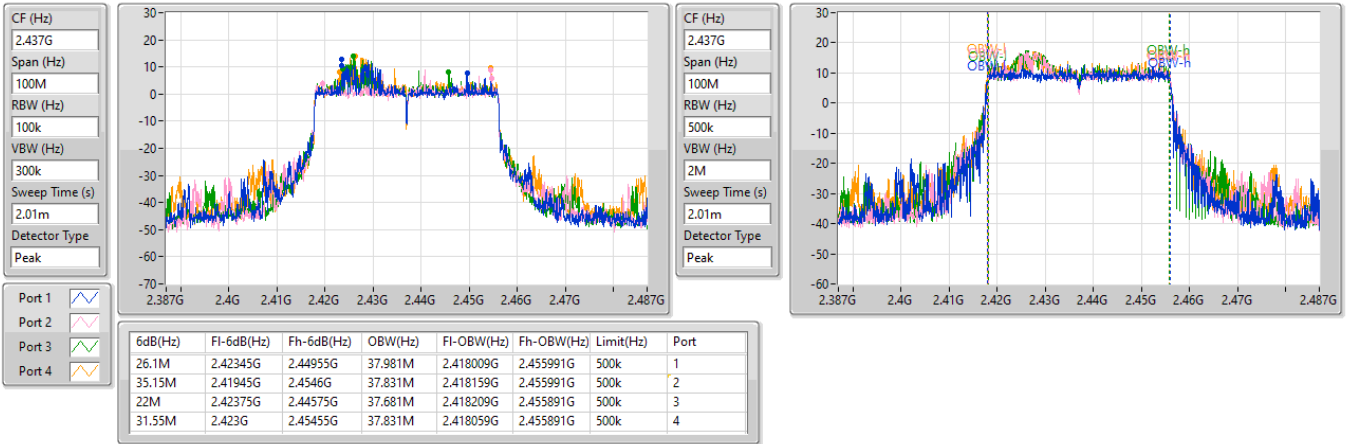


2.4-2.4835GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

EBW

2452MHz

09/07/2025

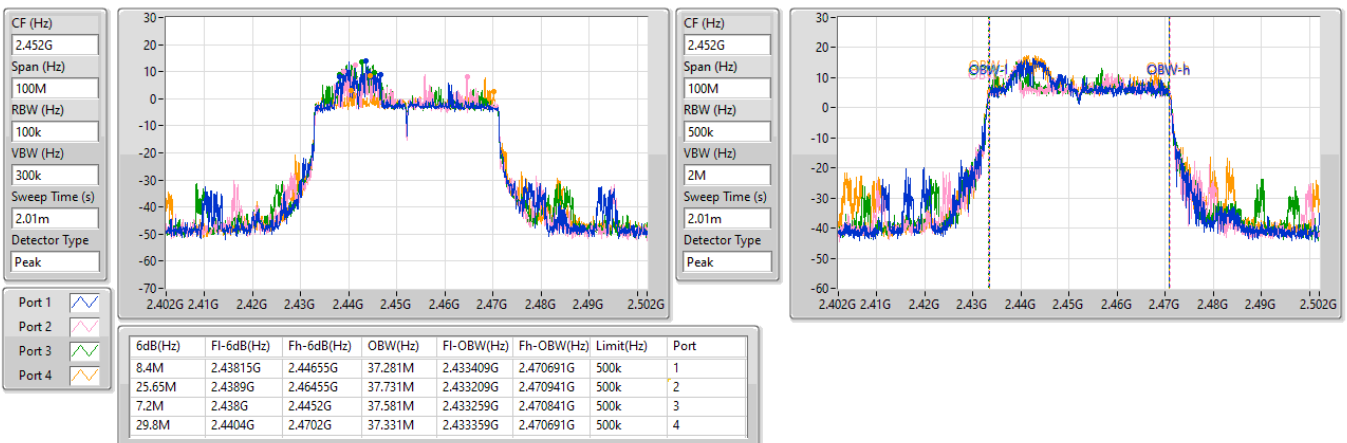

Summary

Mode	Total Power (dBm)	Total Power (W)
2.4-2.4835GHz	-	-
802.11b_Nss1,(1Mbps)_4TX	29.94	0.98628
802.11g_Nss1,(6Mbps)_4TX	29.19	0.82985
802.11be EHT20_Nss1,(MCS0)_4TX	27.98	0.62806
802.11be EHT20-BF_Nss1,(MCS0)_4TX	28.80	0.75858
802.11be EHT40_Nss1,(MCS0)_4TX	24.12	0.25823
802.11be EHT40-BF_Nss1,(MCS0)_4TX	26.69	0.46666

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11b_Nss1,(1Mbps)_4TX	-	-	-	-	-	-	-	-
2412MHz	Pass	5.9949	20.61	20.84	22.95	21.16	27.51	30.00
2437MHz	Pass	5.9949	22.71	23.39	25.80	23.03	29.94	30.00
2462MHz	Pass	5.9949	21.26	21.00	22.60	21.49	27.65	30.00
802.11g_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-
2412MHz	Pass	5.9949	19.39	19.76	19.35	19.76	25.59	30.00
2417MHz	Pass	5.9949	20.65	21.02	20.82	21.24	26.96	30.00
2437MHz	Pass	5.9949	22.84	23.31	23.09	23.41	29.19	30.00
2457MHz	Pass	5.9949	19.34	19.53	19.17	19.83	25.50	30.00
2462MHz	Pass	5.9949	18.75	19.03	18.80	19.27	24.99	30.00
802.11be EHT20_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
2412MHz	Pass	5.9949	18.08	18.42	18.17	18.60	24.34	30.00
2417MHz	Pass	5.9949	20.08	20.46	20.07	20.49	26.30	30.00
2437MHz	Pass	5.9949	21.78	22.19	21.74	22.10	27.98	30.00
2457MHz	Pass	5.9949	17.13	17.27	17.05	17.56	23.28	30.00
2462MHz	Pass	5.9949	17.12	17.27	17.06	17.58	23.28	30.00
802.11be EHT40_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
2422MHz	Pass	5.9949	17.12	17.36	16.93	17.41	23.23	30.00
2437MHz	Pass	5.9949	17.97	18.15	17.89	18.39	24.12	30.00
2452MHz	Pass	5.9949	17.00	17.20	16.91	17.48	23.17	30.00
802.11be EHT20-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
2412MHz	Pass	6.4216	15.72	15.20	15.65	16.14	21.71	29.58
2417MHz	Pass	6.4216	20.52	20.37	20.89	21.02	26.73	29.58
2437MHz	Pass	6.4216	22.79	22.43	22.82	23.07	28.80	29.58
2457MHz	Pass	6.4216	20.90	20.90	21.30	21.67	27.23	29.58
2462MHz	Pass	6.4216	16.26	15.94	16.44	16.72	22.37	29.58
802.11be EHT40-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
2422MHz	Pass	6.4216	16.93	16.66	16.97	17.14	22.95	29.58
2427MHz	Pass	6.4216	17.89	17.89	18.37	18.38	24.16	29.58
2437MHz	Pass	6.4216	20.72	20.39	20.53	21.02	26.69	29.58
2447MHz	Pass	6.4216	17.25	17.06	17.53	17.78	23.43	29.58
2452MHz	Pass	6.4216	17.20	17.03	17.48	17.71	23.38	29.58

DG = Directional Gain; Port X = Port X output power

Summary

Mode	PD (dBm/RBW)
2.4-2.4835GHz	-
802.11b_Nss1,(1Mbps)_4TX	4.78
802.11g_Nss1,(6Mbps)_4TX	1.94
802.11be EHT20_Nss1,(MCS0)_4TX	1.25
802.11be EHT20-BF_Nss1,(MCS0)_4TX	4.81
802.11be EHT40_Nss1,(MCS0)_4TX	-4.98
802.11be EHT40-BF_Nss1,(MCS0)_4TX	2.85

RBW = 3kHz;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11b_Nss1,(1Mbps)_4TX	-	-	-	-	-	-	-	-
2412MHz	Pass	6.4216	-2.10	-2.51	-0.27	-2.04	2.69	7.58
2437MHz	Pass	6.4216	-0.75	0.07	2.56	-0.11	4.78	7.58
2462MHz	Pass	6.4216	-1.93	-3.09	-0.25	-1.22	2.59	7.58
802.11g_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-
2412MHz	Pass	6.4216	-5.88	-5.35	-6.88	-5.65	0.12	7.58
2437MHz	Pass	6.4216	-2.85	-3.24	-3.72	-2.71	1.94	7.58
2462MHz	Pass	6.4216	-6.84	-6.16	-6.72	-6.44	-0.99	7.58
802.11be EHT20_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
2412MHz	Pass	6.4216	-8.76	-7.81	-7.47	-7.30	-2.45	7.58
2437MHz	Pass	6.4216	-4.26	-4.09	-4.79	-3.79	1.25	7.58
2462MHz	Pass	6.4216	-9.17	-9.03	-8.62	-8.71	-3.27	7.58
802.11be EHT40_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
2422MHz	Pass	6.4216	-11.98	-11.95	-13.05	-11.53	-6.30	7.58
2437MHz	Pass	6.4216	-11.10	-10.96	-11.13	-10.81	-4.98	7.58
2452MHz	Pass	6.4216	-12.25	-11.94	-12.56	-12.29	-6.39	7.58
802.11be EHT20-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
2412MHz	Pass	6.4216	-2.85	-2.84	-2.22	-2.68	0.26	7.58
2437MHz	Pass	6.4216	-1.83	-0.27	3.51	-0.68	4.21	7.58
2462MHz	Pass	6.4216	0.45	2.97	4.76	0.23	4.81	7.58
802.11be EHT40-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
2422MHz	Pass	6.4216	-0.44	-0.41	1.39	0.00	2.85	7.58
2437MHz	Pass	6.4216	-0.41	-0.79	0.03	2.37	2.60	7.58
2452MHz	Pass	6.4216	-0.88	-1.86	-1.22	-1.05	1.58	7.58

DG = Directional Gain; RBW = 3kHz;
 PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;


2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

PSD

2412MHz

12/06/2025

CF (Hz)
2.412G
Span (Hz)
30M
RBW (Hz)
3k
VBW (Hz)
10k
Sweep Time (s)
334m
Detector Type
Peak

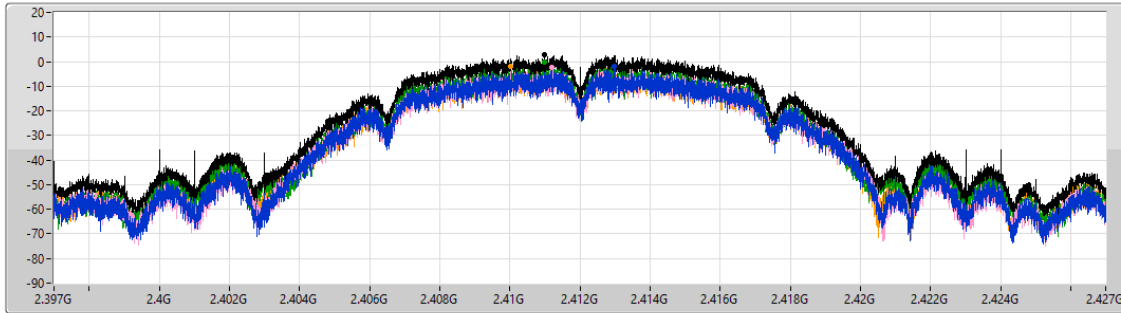

Sum
Port 1
Port 2
Port 3
Port 4

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
2.69	2.69	-2.10	-2.51	-0.27	-2.04


2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

PSD

2437MHz

12/06/2025

CF (Hz)
2.437G
Span (Hz)
30M
RBW (Hz)
3k
VBW (Hz)
10k
Sweep Time (s)
334m
Detector Type
Peak

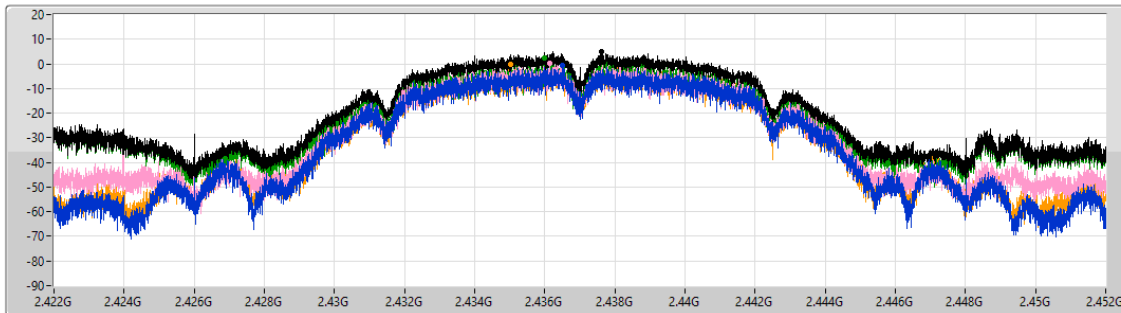

Sum
Port 1
Port 2
Port 3
Port 4


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
4.78	4.78	-0.75	0.07	2.56	-0.11

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

PSD

2462MHz

12/06/2025

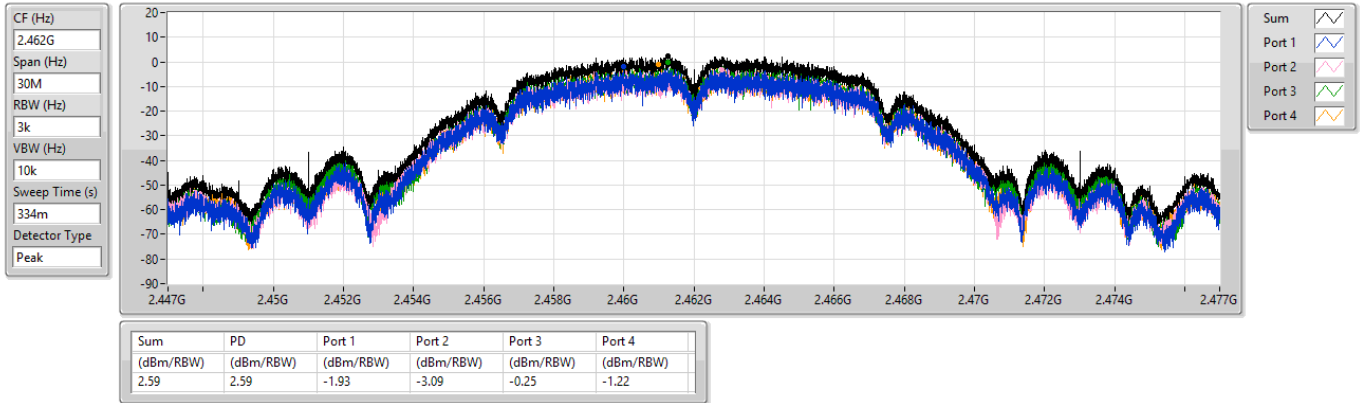


2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

PSD

2412MHz

12/06/2025

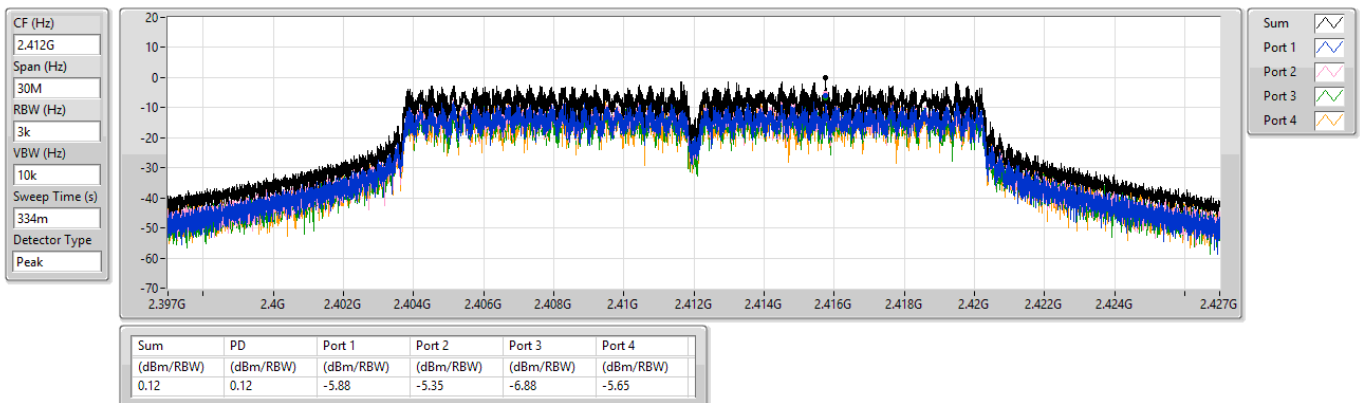


2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

PSD

2437MHz

12/06/2025

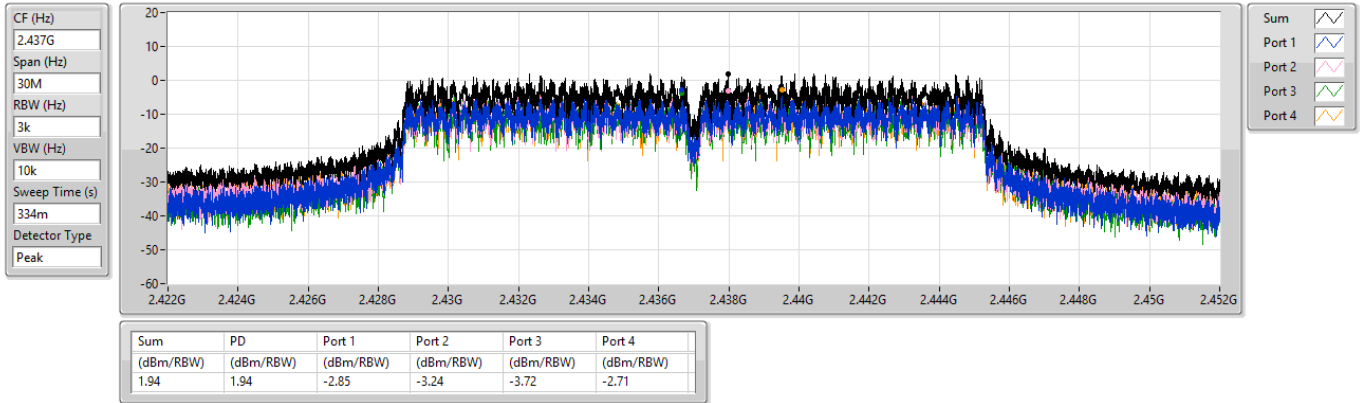


2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

PSD

2462MHz

12/06/2025

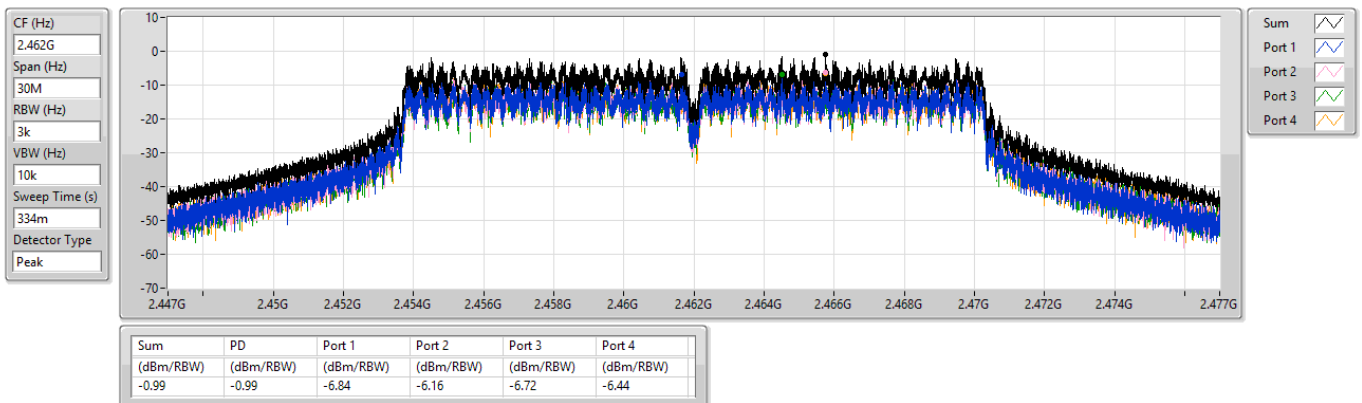


2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

2412MHz

12/06/2025

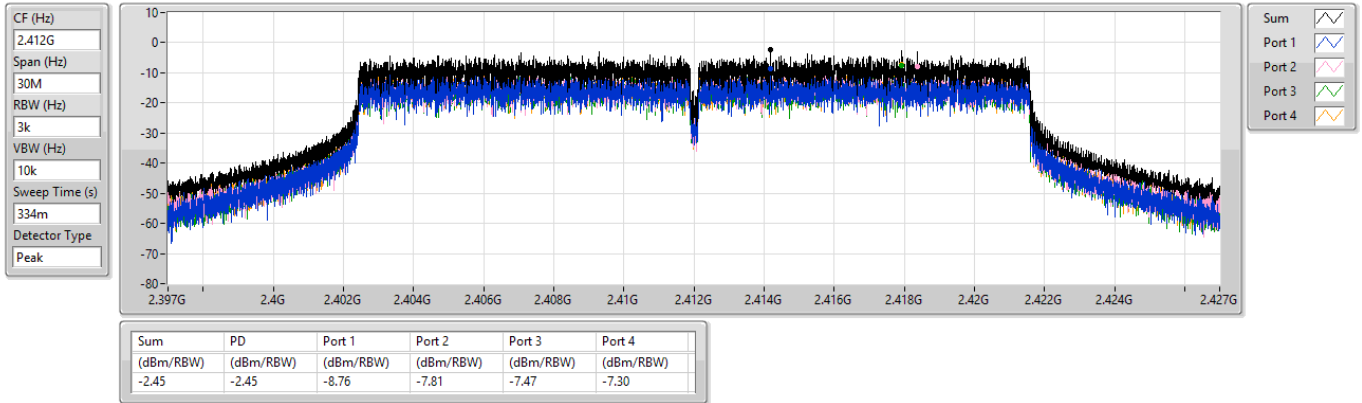


2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

2437MHz

12/06/2025

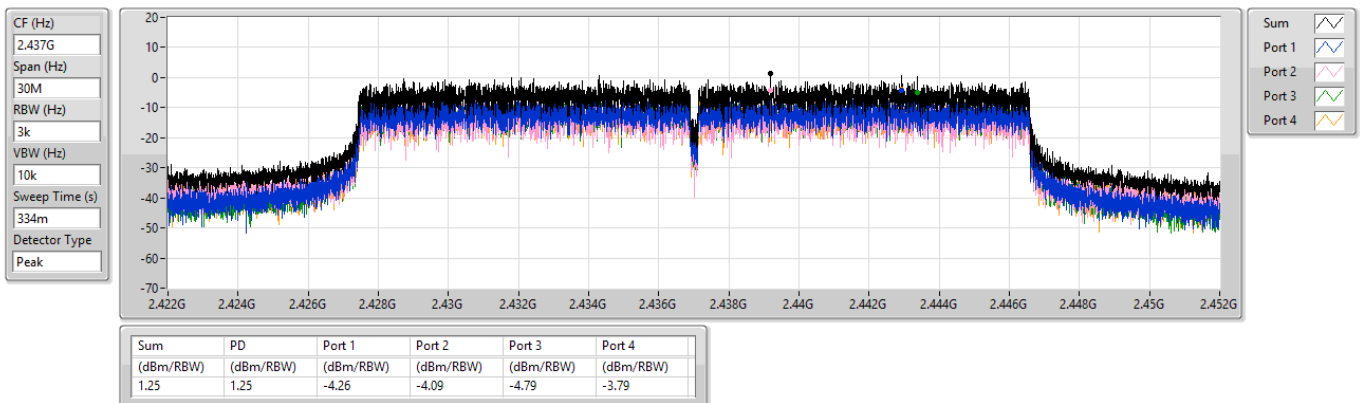


2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

2462MHz

12/06/2025

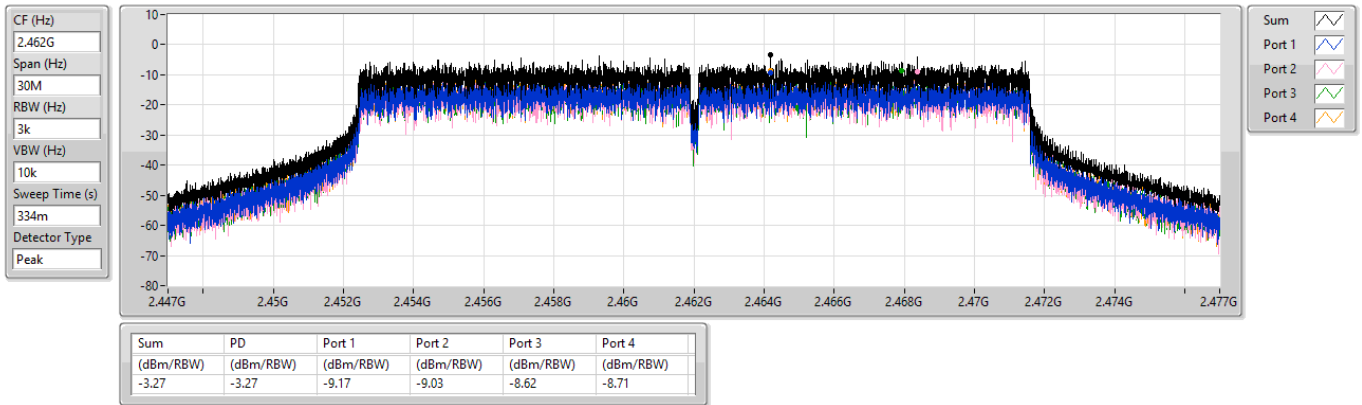


2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD

2422MHz

12/06/2025

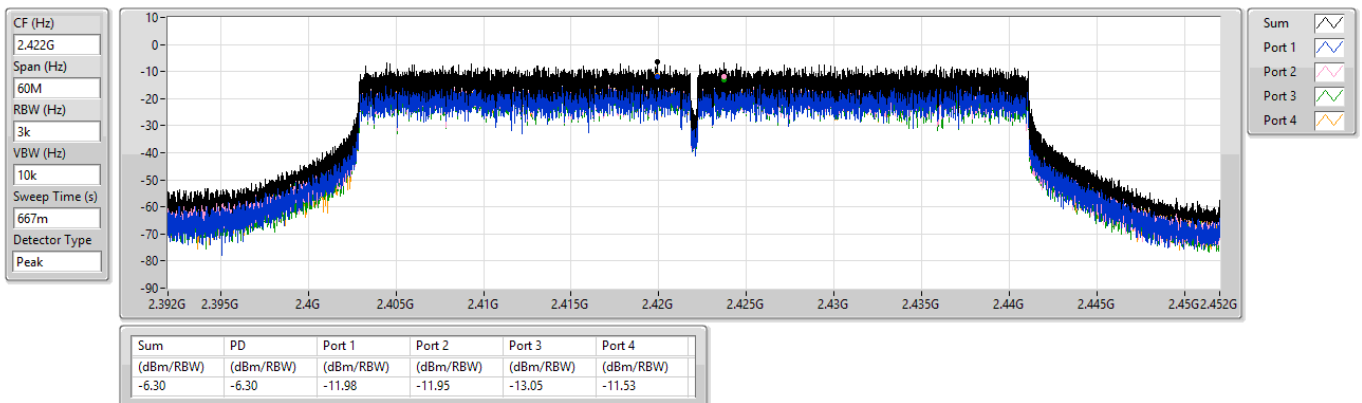


2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD

2437MHz

12/06/2025

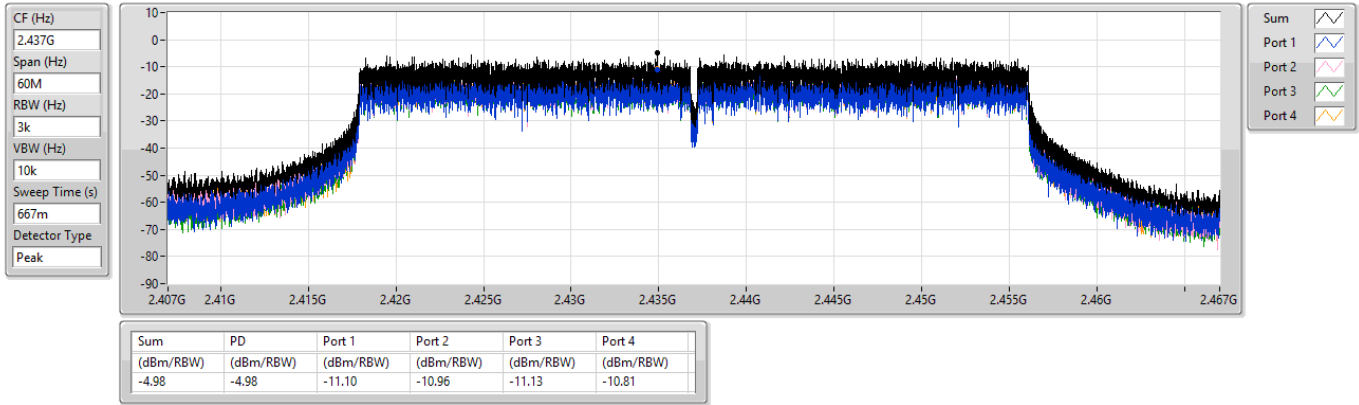


2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD

2452MHz

12/06/2025

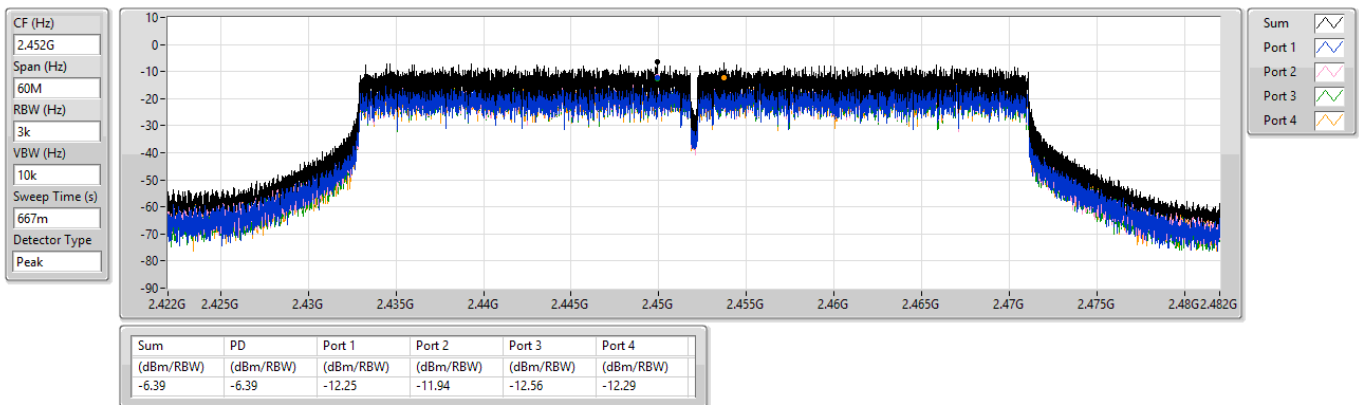


2.4-2.4835GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

PSD

2412MHz

09/07/2025

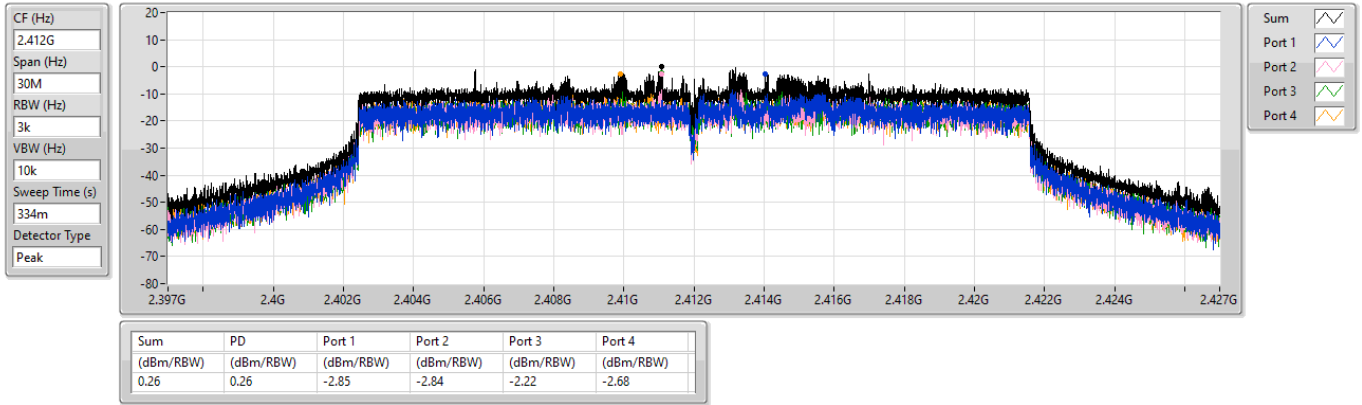


2.4-2.4835GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

PSD

2437MHz

09/07/2025

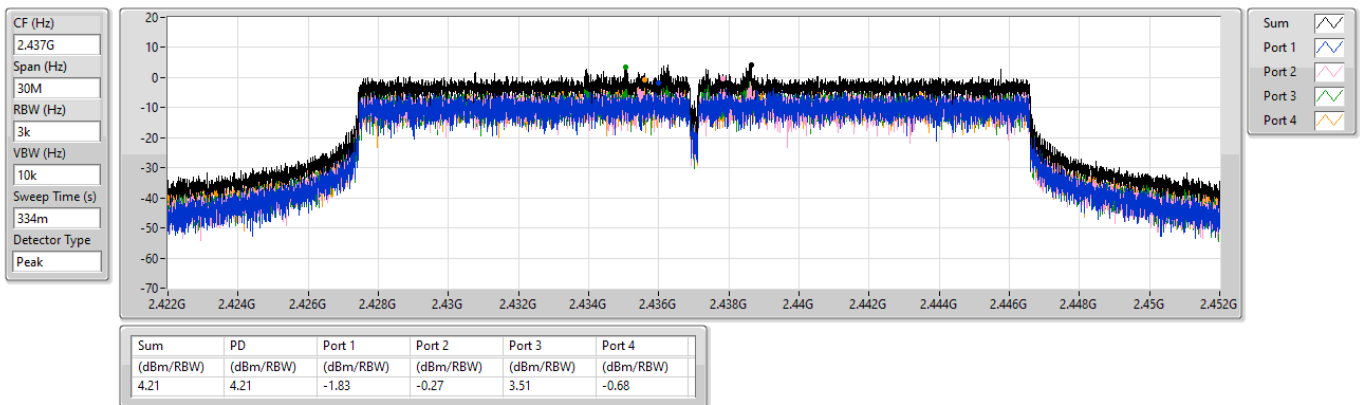


2.4-2.4835GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

PSD

2462MHz

09/07/2025

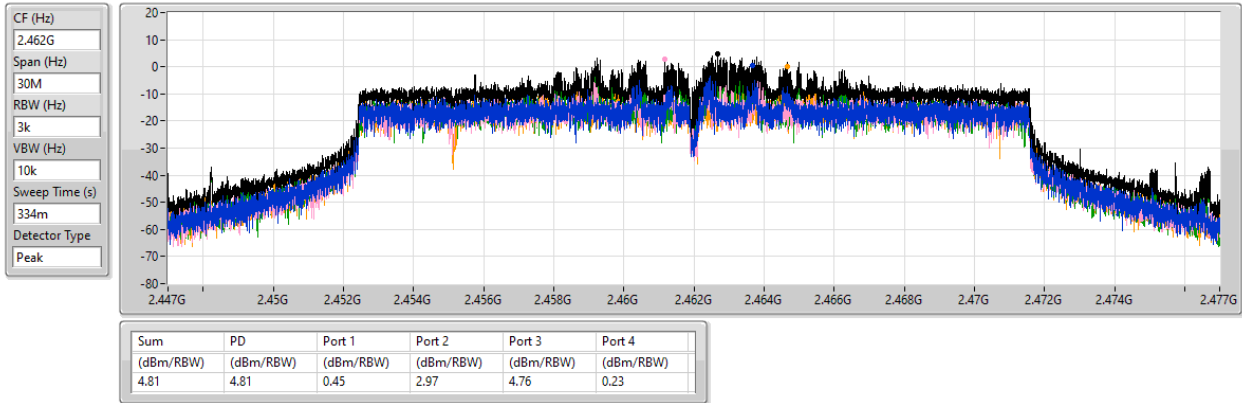


2.4-2.4835GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

PSD

2422MHz

09/07/2025

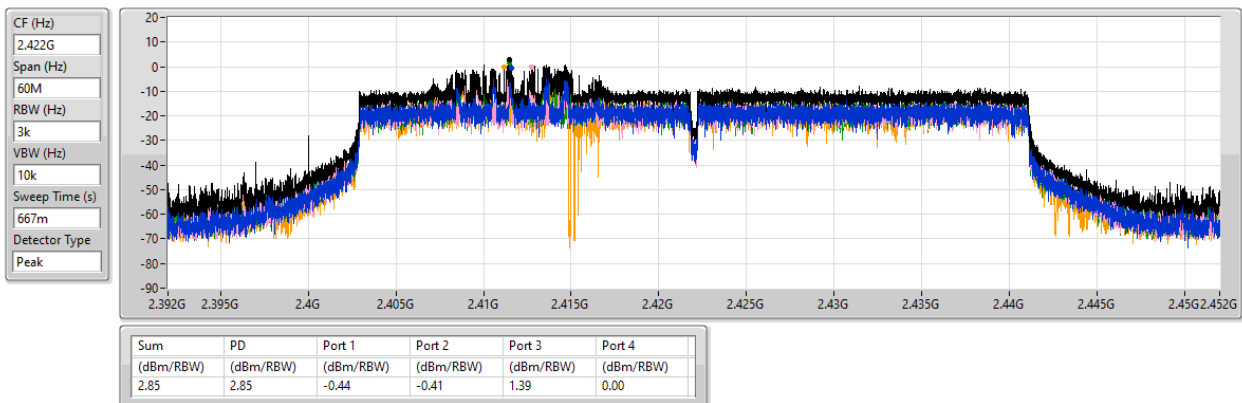


2.4-2.4835GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

PSD

2437MHz

09/07/2025

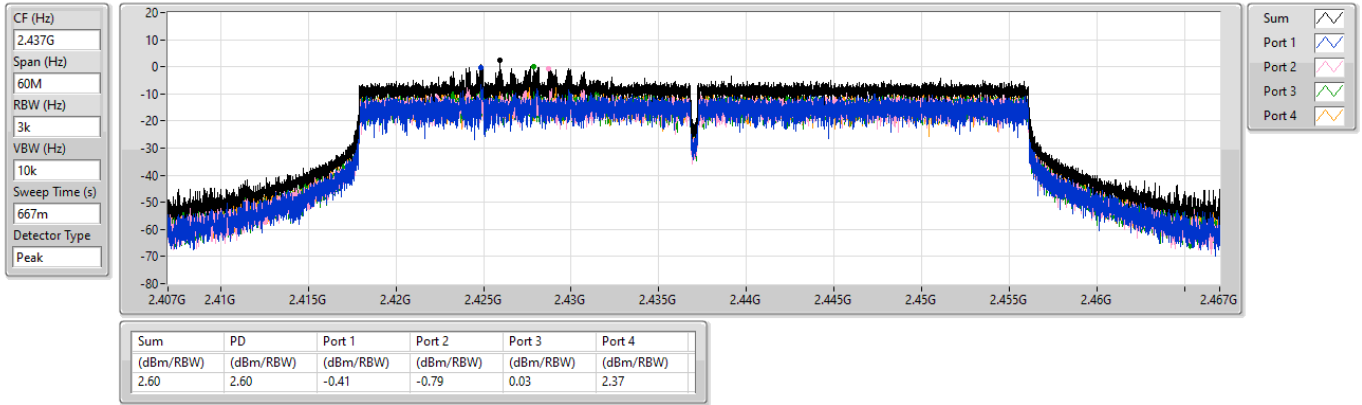


2.4-2.4835GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

PSD

2452MHz

09/07/2025

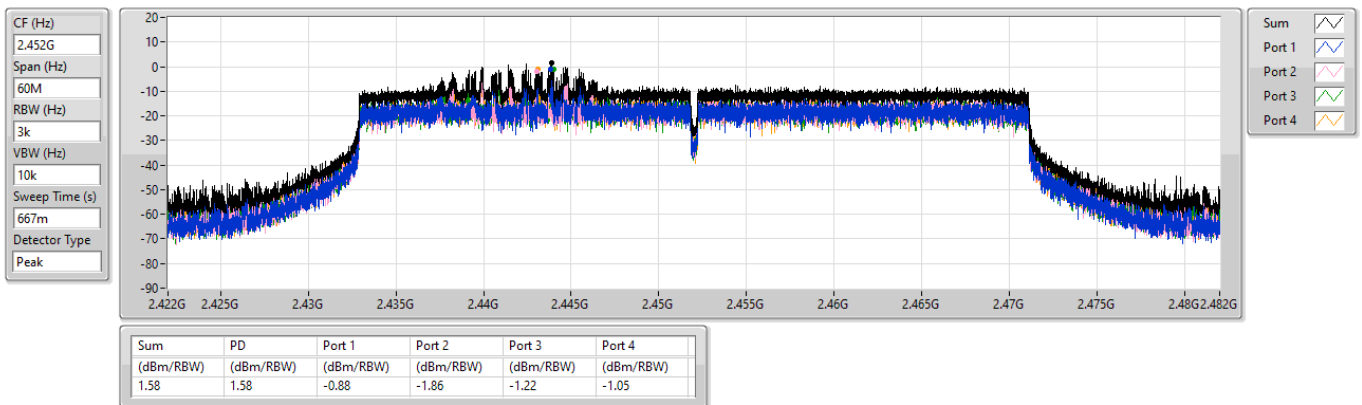



Summary

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
802.11b_Nss1,(1Mbps)_4TX	Pass	2.43657G	16.98	-13.02	2.1771G	-52.17	2.4G	-30.83	2.4G	-30.64	2.50102G	-50.22	21.51895G	-46.15	3
802.11g_Nss1,(6Mbps)_4TX	Pass	2.43073G	12.09	-17.91	2.30874G	-53.35	2.39992G	-21.82	2.4G	-20.77	2.50286G	-52.35	21.57233G	-46.59	4
802.11be EHT20_Nss1,(MCS0)_4TX	Pass	2.44208G	10.30	-19.70	2.30292G	-53.45	2.4G	-23.25	2.4G	-23.80	2.51038G	-52.65	21.5611G	-46.00	1
802.11be EHT20-BF_Nss1,(MCS0)_4TX	Pass	2.43791G	18.83	-11.17	2.03497G	-45.67	2.4G	-20.12	2.4G	-25.63	2.5127G	-43.70	5.8725G	-38.07	4
802.11be EHT40_Nss1,(MCS0)_4TX	Pass	2.43457G	3.98	-26.02	2.10703G	-54.36	2.39984G	-29.54	2.4G	-28.03	2.51198G	-51.31	21.54758G	-46.23	4
802.11be EHT40-BF_Nss1,(MCS0)_4TX	Pass	2.42655G	16.43	-13.57	2.19062G	-45.38	2.39888G	-24.18	2.4G	-22.85	2.50894G	-41.85	6.75352G	-38.00	1

Result

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
802.11b_Nss1,(1Mbps)_4TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.43657G	16.98	-13.02	2.30525G	-52.18	2.4G	-33.94	2.4G	-33.01	2.5111G	-51.20	21.54705G	-45.91	1
2412MHz	Pass	2.43657G	16.98	-13.02	2.30991G	-53.51	2.39808G	-36.71	2.4G	-34.67	2.50294G	-51.02	21.59762G	-45.74	2
2412MHz	Pass	2.43657G	16.98	-13.02	2.1771G	-52.17	2.4G	-30.83	2.4G	-30.64	2.50102G	-50.22	21.51895G	-46.15	3
2412MHz	Pass	2.43657G	16.98	-13.02	2.30525G	-52.26	2.4G	-33.25	2.4G	-31.50	2.5007G	-50.62	21.65662G	-45.18	4
2437MHz	Pass	2.43657G	16.98	-13.02	2.30758G	-52.52	2.392G	-46.62	2.4G	-48.06	2.50222G	-47.51	21.44309G	-45.87	1
2437MHz	Pass	2.43657G	16.98	-13.02	2.30641G	-51.18	2.4G	-46.38	2.4G	-45.85	2.51598G	-47.94	21.5049G	-44.86	2
2437MHz	Pass	2.43657G	16.98	-13.02	2.30175G	-49.64	2.4G	-41.42	2.4G	-40.32	2.50198G	-45.30	21.52176G	-46.33	3
2437MHz	Pass	2.43657G	16.98	-13.02	2.17826G	-51.55	2.4G	-45.44	2.4G	-45.57	2.50246G	-46.91	21.651G	-44.99	4
2462MHz	Pass	2.43657G	16.98	-13.02	2.30758G	-54.00	2.39504G	-49.20	2.4G	-50.78	2.50102G	-47.97	21.64538G	-46.70	1
2462MHz	Pass	2.43657G	16.98	-13.02	2.11768G	-52.18	2.39352G	-50.39	2.4G	-51.03	2.50398G	-47.06	21.46838G	-46.12	2
2462MHz	Pass	2.43657G	16.98	-13.02	2.18292G	-53.02	2.394G	-48.85	2.4G	-49.59	2.50198G	-45.84	21.84205G	-46.57	3
2462MHz	Pass	2.43657G	16.98	-13.02	2.30874G	-53.74	2.39992G	-48.10	2.4G	-50.80	2.51406G	-48.92	21.9741G	-45.57	4
802.11g_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.43073G	12.09	-17.91	2.30175G	-52.02	2.39984G	-21.98	2.4G	-22.01	2.5115G	-51.88	21.51895G	-45.79	1
2412MHz	Pass	2.43073G	12.09	-17.91	2.15147G	-53.56	2.4G	-23.51	2.4G	-23.85	2.51438G	-51.58	21.9741G	-45.45	2
2412MHz	Pass	2.43073G	12.09	-17.91	2.19224G	-53.18	2.39984G	-23.88	2.4G	-23.36	2.5131G	-51.96	21.51895G	-46.29	3
2412MHz	Pass	2.43073G	12.09	-17.91	2.30874G	-53.35	2.39992G	-21.82	2.4G	-20.77	2.50286G	-52.35	21.57233G	-46.59	4
2437MHz	Pass	2.43073G	12.09	-17.91	2.11419G	-52.29	2.39968G	-39.19	2.4G	-38.53	2.50198G	-48.21	21.57795G	-45.94	1
2437MHz	Pass	2.43073G	12.09	-17.91	2.30991G	-52.88	2.39984G	-39.87	2.4G	-40.60	2.50198G	-47.55	23.15131G	-45.88	2
2437MHz	Pass	2.43073G	12.09	-17.91	2.30408G	-51.62	2.3996G	-39.61	2.4G	-40.03	2.5199G	-48.64	21.57233G	-46.12	3
2437MHz	Pass	2.43073G	12.09	-17.91	2.30991G	-51.46	2.3992G	-32.57	2.4G	-34.67	2.5015G	-43.16	21.97972G	-46.31	4
2462MHz	Pass	2.43073G	12.09	-17.91	2.18991G	-53.64	2.3948G	-51.14	2.4G	-51.87	2.50366G	-50.15	22.0022G	-45.37	1
2462MHz	Pass	2.43073G	12.09	-17.91	2.30874G	-53.30	2.3996G	-50.73	2.4G	-52.78	2.51582G	-50.70	21.54143G	-45.43	2
2462MHz	Pass	2.43073G	12.09	-17.91	2.09788G	-54.47	2.4G	-52.10	2.4G	-52.00	2.50974G	-50.79	21.5611G	-45.27	3
2462MHz	Pass	2.43073G	12.09	-17.91	2.16312G	-53.49	2.39408G	-51.74	2.4G	-51.79	2.50222G	-49.80	21.70438G	-46.23	4
802.11be EHT20_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.44208G	10.30	-19.70	2.30292G	-53.45	2.4G	-23.25	2.4G	-23.80	2.51038G	-52.65	21.5611G	-46.00	1
2412MHz	Pass	2.44208G	10.30	-19.70	57.96M	-54.37	2.4G	-24.47	2.4G	-24.58	2.50134G	-52.46	21.43747G	-46.38	2
2412MHz	Pass	2.44208G	10.30	-19.70	2.17826G	-53.26	2.4G	-25.45	2.4G	-24.59	2.5127G	-52.02	21.49929G	-45.74	3
2412MHz	Pass	2.44208G	10.30	-19.70	2.30525G	-53.21	2.4G	-24.72	2.4G	-24.14	2.51902G	-51.81	21.48805G	-45.35	4
2437MHz	Pass	2.44208G	10.30	-19.70	2.30874G	-52.91	2.39872G	-41.75	2.4G	-43.89	2.50454G	-48.91	21.60043G	-46.03	1
2437MHz	Pass	2.44208G	10.30	-19.70	2.17244G	-54.00	2.3988G	-41.99	2.4G	-43.00	2.50502G	-49.48	21.65381G	-46.21	2
2437MHz	Pass	2.44208G	10.30	-19.70	2.30641G	-53.21	2.3988G	-42.19	2.4G	-43.00	2.50798G	-49.09	21.52176G	-46.01	3
2437MHz	Pass	2.44208G	10.30	-19.70	2.30525G	-52.78	2.39872G	-38.15	2.4G	-41.61	2.50102G	-48.14	21.48805G	-45.69	4
2462MHz	Pass	2.44208G	10.30	-19.70	2.07225G	-54.17	2.39312G	-52.73	2.4G	-53.02	2.5011G	-50.23	21.47962G	-45.13	1
2462MHz	Pass	2.44208G	10.30	-19.70	2.09438G	-53.65	2.3996G	-53.59	2.4G	-53.94	2.50022G	-49.85	21.98534G	-46.20	2
2462MHz	Pass	2.44208G	10.30	-19.70	2.06759G	-53.70	2.39984G	-52.63	2.4G	-52.78	2.50262G	-50.17	21.76338G	-46.75	3
2462MHz	Pass	2.44208G	10.30	-19.70	2.16079G	-54.61	2.39024G	-51.88	2.4G	-52.38	2.5055G	-50.07	21.46557G	-45.87	4
802.11be EHT40_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2422MHz	Pass	2.43457G	3.98	-26.02	2.30283G	-53.29	2.39984G	-30.79	2.4G	-29.23	2.5235G	-53.27	21.57002G	-45.96	1
2422MHz	Pass	2.43457G	3.98	-26.02	1.95131G	-54.60	2.4G	-31.01	2.4G	-30.69	2.5067G	-52.32	21.93181G	-46.21	2
2422MHz	Pass	2.43457G	3.98	-26.02	2.3097G	-53.10	2.4G	-30.34	2.4G	-29.93	2.5059G	-51.17	21.44942G	-46.19	3
2422MHz	Pass	2.43457G	3.98	-26.02	2.10703G	-54.36	2.39984G	-29.54	2.4G	-28.03	2.51198G	-51.31	21.54758G	-46.23	4
2437MHz	Pass	2.43457G	3.98	-26.02	2.30397G	-53.93	2.39984G	-40.99	2.4G	-41.17	2.50414G	-48.89	21.53917G	-45.79	1
2437MHz	Pass	2.43457G	3.98	-26.02	2.30855G	-54.21	2.39984G	-41.62	2.4G	-42.39	2.50382G	-50.04	21.51112G	-45.84	2
2437MHz	Pass	2.43457G	3.98	-26.02	2.30512G	-54.31	2.39984G	-42.35	2.4G	-43.02	2.50222G	-51.55	21.60928G	-44.97	3
2437MHz	Pass	2.43457G	3.98	-26.02	2.17344G	-53.09	2.39952G	-38.40	2.4G	-39.85	2.50958G	-46.71	21.53356G	-45.30	4
2452MHz	Pass	2.43457G	3.98	-26.02	2.30397G	-54.00	2.39584G	-47.04	2.4G	-47.52	2.5051G	-45.65	21.99912G	-45.72	1
2452MHz	Pass	2.43457G	3.98	-26.02	2.17115G	-54.73	2.3984G	-46.20	2.4G	-47.81	2.50158G	-46.62	21.65977G	-44.81	2
2452MHz	Pass	2.43457G	3.98	-26.02	2.1265G	-53.12	2.39744G	-47.97	2.4G	-51.31	2.50206G	-47.85	21.64574G	-46.11	3
2452MHz	Pass	2.43457G	3.98	-26.02	2.30512G	-54.31	2.39808G	-44.36	2.4G	-46.06	2.50046G	-44.82	21.95985G	-46.19	4
802.11be EHT20-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.43791G	18.83	-11.17	656.77M	-46.08	2.39976G	-20.67	2.4G	-21.29	2.52046G	-45.40	5.8135G	-38.87	1
2412MHz	Pass	2.43791G	18.83	-11.17	907.25M	-45.99	2.39992G	-22.04	2.4G	-23.94	2.51406G	-44.68	5.79102G	-37.47	2
2412MHz	Pass	2.43791G	18.83	-11.17	2.19574G	-46.36	2.4G	-20.32	2.4G	-26.62	2.52006G	-44.56	16.84946G	-37.28	3
2412MHz	Pass	2.43791G	18.83	-11.17	2.03497G	-45.67	2.4G	-20.12	2.4G	-25.63	2.5127G	-43.70	5.8725G	-38.07	4
2437MHz	Pass	2.43791G	18.83	-11.17	2.30525G	-45.88	2.39936G	-36.62	2.4G	-37.50	2.50614G	-43.10	5.77697G	-38.23	1
2437MHz	Pass	2.43791G	18.83	-11.17	689.39M	-45.24	2.39944G	-37.23	2.4G	-35.87	2.50478G	-43.12	5.96521G	-38.53	2
2437MHz	Pass	2.43791G	18.83	-11.17	2.30292G	-45.99	2.4G	-34.68	2.4G	-38.66	2.50006G	-41.95	6.9907G	-38.24	3
2437MHz	Pass	2.43791G	18.83	-11.17	2.18059G	-44.96	2.39936G	-33.51	2.4G	-34.52	2.50014G	-42.09	6.99632G	-37.95	4


Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
2462MHz	Pass	2.43791G	18.83	-11.17	847.83M	-45.47	2.39752G	-44.12	2.4G	-47.06	2.50998G	-43.62	6.99351G	-37.90	1
2462MHz	Pass	2.43791G	18.83	-11.17	2.00235G	-45.38	2.39504G	-43.28	2.4G	-47.56	2.50406G	-42.99	5.96802G	-38.08	2
2462MHz	Pass	2.43791G	18.83	-11.17	2.15962G	-45.43	2.39904G	-43.14	2.4G	-47.51	2.51702G	-42.20	5.90621G	-37.38	3
2462MHz	Pass	2.43791G	18.83	-11.17	2.30408G	-45.49	2.39552G	-43.04	2.4G	-46.28	2.50806G	-42.14	5.93993G	-38.61	4
802.11be EHT40-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2422MHz	Pass	2.42655G	16.43	-13.57	2.19062G	-45.38	2.39888G	-24.18	2.4G	-22.85	2.50894G	-41.85	6.75352G	-38.00	1
2422MHz	Pass	2.42655G	16.43	-13.57	941.42M	-45.90	2.4G	-24.85	2.4G	-24.61	2.50894G	-41.83	6.90777G	-38.56	2
2422MHz	Pass	2.42655G	16.43	-13.57	615.1M	-46.73	2.39904G	-26.35	2.4G	-24.41	2.51342G	-42.07	6.12249G	-37.90	3
2422MHz	Pass	2.42655G	16.43	-13.57	1.96963G	-46.68	2.39808G	-22.95	2.4G	-24.05	2.50142G	-37.79	6.33844G	-37.43	4
2437MHz	Pass	2.42655G	16.43	-13.57	2.18146G	-46.86	2.39984G	-31.09	2.4G	-40.47	2.50014G	-37.97	17.60717G	-38.76	1
2437MHz	Pass	2.42655G	16.43	-13.57	619.68M	-46.01	2.39856G	-30.55	2.4G	-40.77	2.50414G	-38.07	5.85325G	-38.46	2
2437MHz	Pass	2.42655G	16.43	-13.57	1.85628G	-45.88	2.3992G	-29.64	2.4G	-41.82	2.50414G	-38.65	6.97508G	-37.43	3
2437MHz	Pass	2.42655G	16.43	-13.57	1.7143G	-46.15	2.39968G	-26.59	2.4G	-26.37	2.50014G	-36.26	5.93739G	-38.70	4
2452MHz	Pass	2.42655G	16.43	-13.57	2.09329G	-45.29	2.3976G	-33.14	2.4G	-33.30	2.50334G	-32.36	6.95544G	-38.75	1
2452MHz	Pass	2.42655G	16.43	-13.57	2.30741G	-46.40	2.39968G	-33.25	2.4G	-36.19	2.50574G	-32.26	5.91495G	-37.89	2
2452MHz	Pass	2.42655G	16.43	-13.57	2.30512G	-46.72	2.39952G	-34.12	2.4G	-36.37	2.50334G	-33.71	6.70023G	-38.39	3
2452MHz	Pass	2.42655G	16.43	-13.57	2.30397G	-45.72	2.3952G	-30.99	2.4G	-46.11	2.50494G	-31.77	6.99751G	-38.51	4

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

CSEndB

2412MHz

12/06/2025

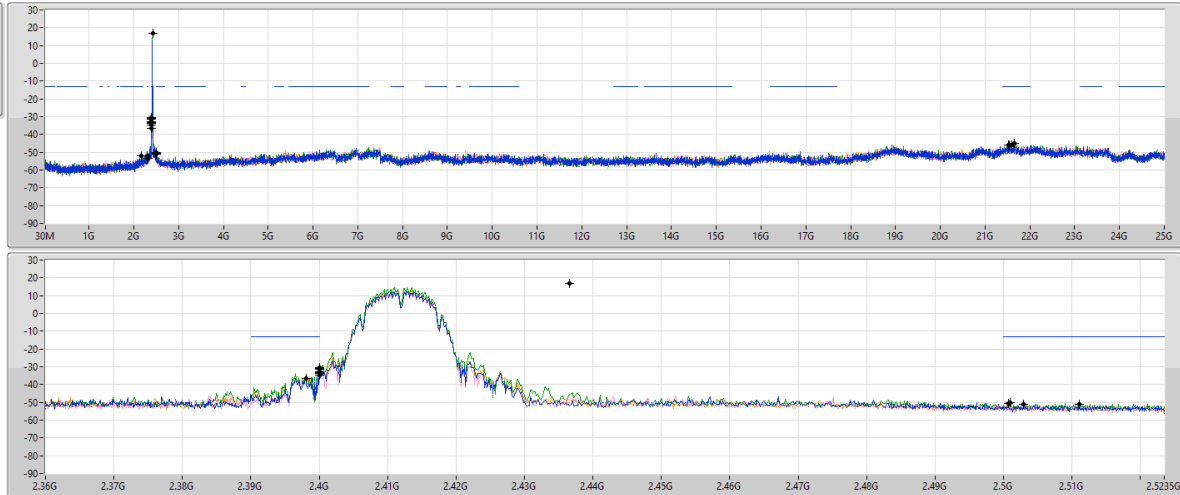RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2
Port 3
Port 4


Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.43657G	16.98	-13.02	2.30525G	-52.18	2.4G	-33.94	2.4G	-33.01	2.5111G	-51.20	21.54705G	-45.91	1
2.43657G	16.98	-13.02	2.30991G	-53.51	2.39808G	-36.71	2.4G	-34.67	2.50294G	-51.02	21.59762G	-45.74	2
2.43657G	16.98	-13.02	2.1771G	-52.17	2.4G	-30.83	2.4G	-30.64	2.50102G	-50.22	21.51895G	-46.15	3
2.43657G	16.98	-13.02	2.30525G	-52.26	2.4G	-33.25	2.4G	-31.50	2.5007G	-50.62	21.65662G	-45.18	4

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

CSEndB

2437MHz

12/06/2025

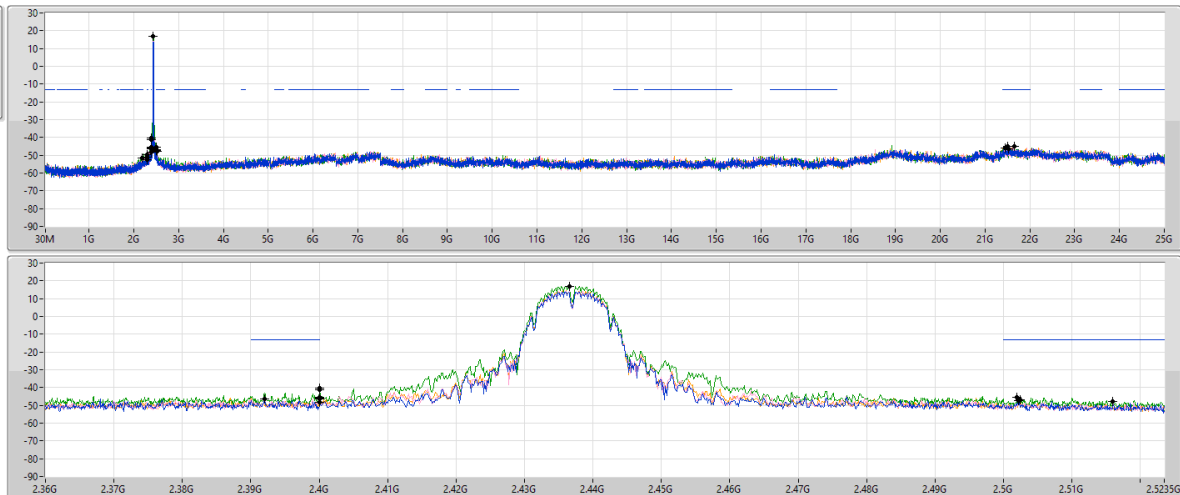RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2
Port 3
Port 4



Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.43657G	16.98	-13.02	2.30758G	-52.52	2.392G	-46.62	2.4G	-48.06	2.50222G	-47.51	21.44309G	-45.87	1
2.43657G	16.98	-13.02	2.30641G	-51.18	2.4G	-46.38	2.4G	-45.85	2.51598G	-47.94	21.5049G	-44.86	2
2.43657G	16.98	-13.02	2.30175G	-49.64	2.4G	-41.42	2.4G	-40.32	2.50198G	-45.30	21.52176G	-46.33	3
2.43657G	16.98	-13.02	2.17826G	-51.55	2.4G	-45.44	2.4G	-45.57	2.50246G	-46.91	21.651G	-44.99	4

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

CSEndB

2462MHz

12/06/2025

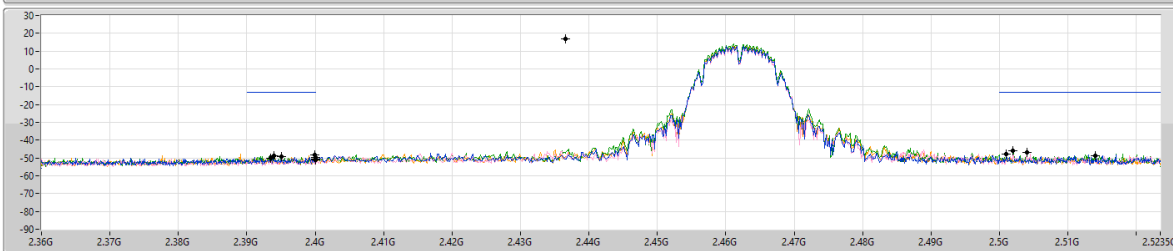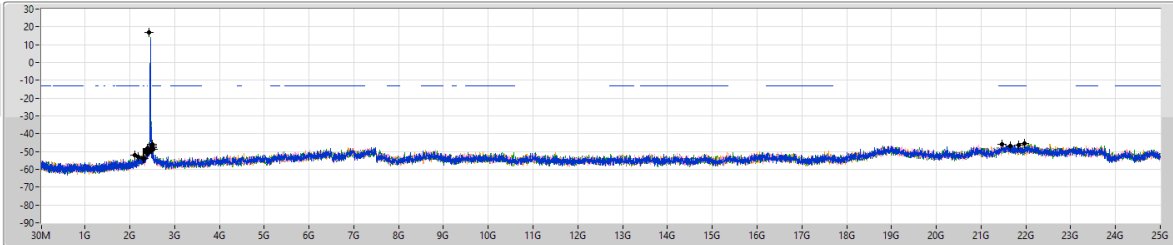RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2
Port 3
Port 4



Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.43657G	16.98	-13.02	2.30758G	-54.00	2.39504G	-49.20	2.4G	-50.78	2.50102G	-47.97	21.64538G	-46.70	1
2.43657G	16.98	-13.02	2.11768G	-52.18	2.39352G	-50.39	2.4G	-51.03	2.50398G	-47.06	21.46838G	-46.12	2
2.43657G	16.98	-13.02	2.18292G	-53.02	2.394G	-48.85	2.4G	-49.59	2.50198G	-45.84	21.84205G	-46.57	3
2.43657G	16.98	-13.02	2.30874G	-53.74	2.39992G	-48.10	2.4G	-50.80	2.51406G	-48.92	21.9741G	-45.57	4

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

CSEndB

2412MHz

12/06/2025

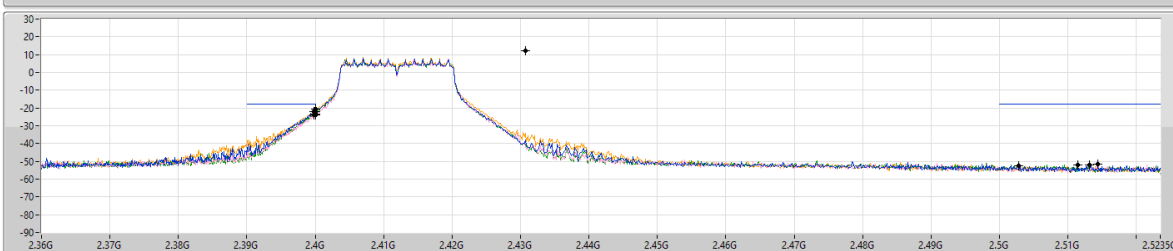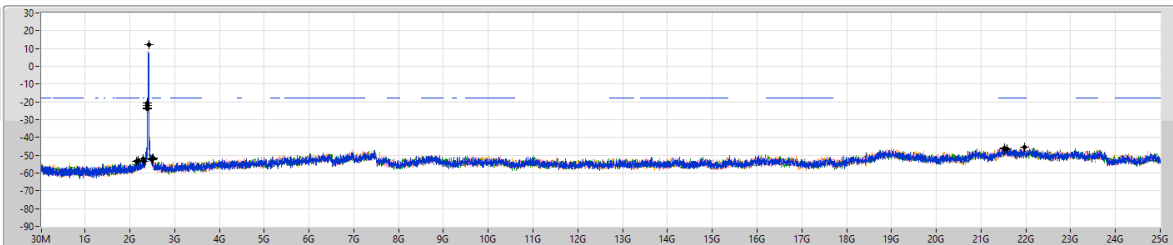RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2
Port 3
Port 4



Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.43073G	12.09	-17.91	2.30175G	-52.02	2.39984G	-21.98	2.4G	-22.01	2.5115G	-51.88	21.51895G	-45.79	1
2.43073G	12.09	-17.91	2.15147G	-53.56	2.4G	-23.51	2.4G	-23.85	2.51438G	-51.58	21.9741G	-45.45	2
2.43073G	12.09	-17.91	2.19224G	-53.18	2.39984G	-23.88	2.4G	-23.36	2.5131G	-51.96	21.51895G	-46.29	3
2.43073G	12.09	-17.91	2.30874G	-53.35	2.39992G	-21.82	2.4G	-20.77	2.50286G	-52.35	21.57233G	-46.59	4

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

CSNdB

2437MHz

12/06/2025

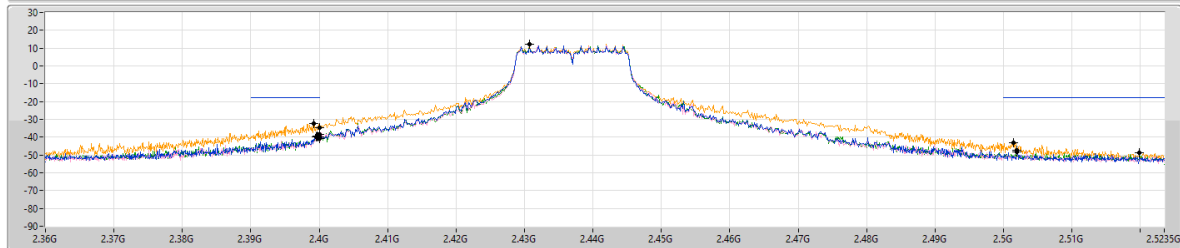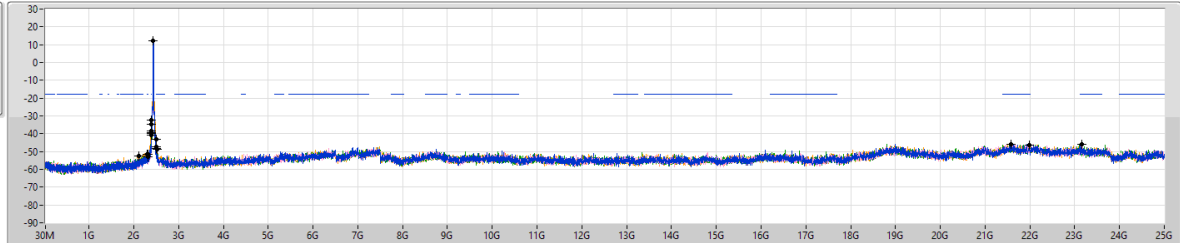RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2
Port 3
Port 4



Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.43073G	12.09	-17.91	2.11419G	-52.29	2.39968G	-39.19	2.4G	-38.53	2.50198G	-48.21	21.57795G	-45.94	1
2.43073G	12.09	-17.91	2.30991G	-52.88	2.39984G	-39.87	2.4G	-40.60	2.50198G	-47.55	23.15131G	-45.88	2
2.43073G	12.09	-17.91	2.30408G	-51.62	2.3996G	-39.61	2.4G	-40.03	2.5199G	-48.64	21.57233G	-46.12	3
2.43073G	12.09	-17.91	2.30991G	-51.46	2.3992G	-32.57	2.4G	-34.67	2.5015G	-43.16	21.97972G	-46.31	4

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

CSNdB

2462MHz

12/06/2025

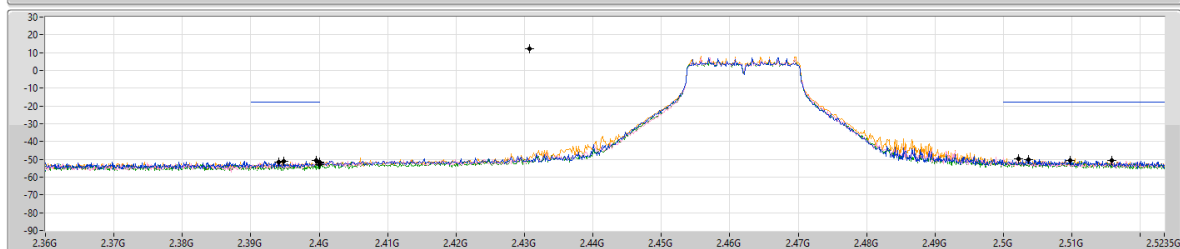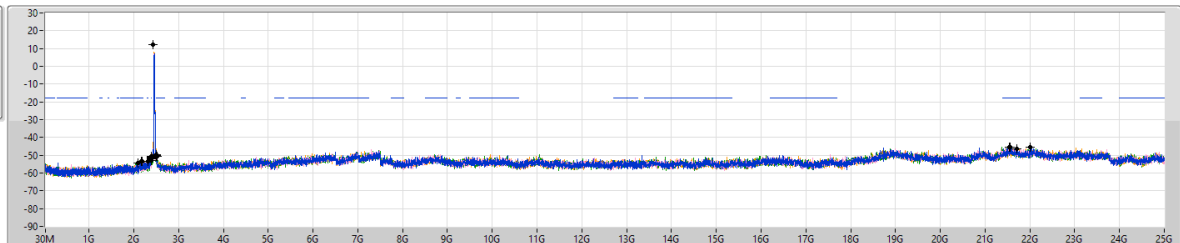RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2
Port 3
Port 4



Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.43073G	12.09	-17.91	2.18991G	-53.64	2.3948G	-51.14	2.4G	-51.87	2.50366G	-50.15	22.0022G	-45.37	1
2.43073G	12.09	-17.91	2.30874G	-53.30	2.3996G	-50.73	2.4G	-52.78	2.51582G	-50.70	21.54143G	-45.43	2
2.43073G	12.09	-17.91	2.09788G	-54.47	2.4G	-52.10	2.4G	-52.00	2.50974G	-50.79	21.5611G	-45.27	3
2.43073G	12.09	-17.91	2.16312G	-53.49	2.39408G	-51.74	2.4G	-51.79	2.50222G	-49.80	21.70438G	-46.23	4

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX

CSEndB

2412MHz

12/06/2025

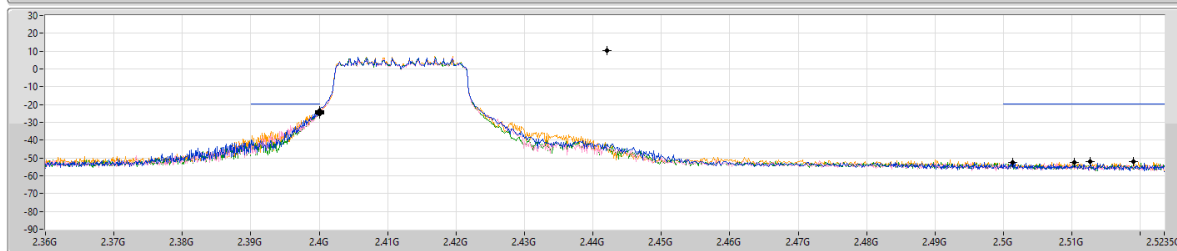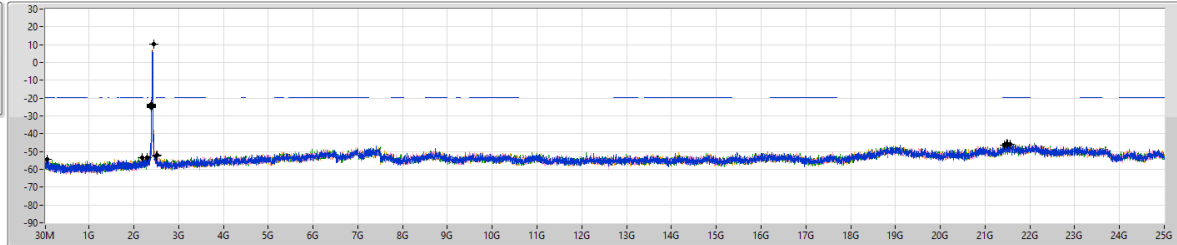RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2
Port 3
Port 4



Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.44208G	10.30	-19.70	2.30292G	-53.45	2.4G	-23.25	2.4G	-23.80	2.51038G	-52.65	21.5611G	-46.00	1
2.44208G	10.30	-19.70	57.96M	-54.37	2.4G	-24.47	2.4G	-24.58	2.50134G	-52.46	21.43747G	-46.38	2
2.44208G	10.30	-19.70	2.17826G	-53.26	2.4G	-25.45	2.4G	-24.59	2.5127G	-52.02	21.49929G	-45.74	3
2.44208G	10.30	-19.70	2.30525G	-53.21	2.4G	-24.72	2.4G	-24.14	2.51902G	-51.81	21.48805G	-45.35	4

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX

CSEndB

2437MHz

12/06/2025

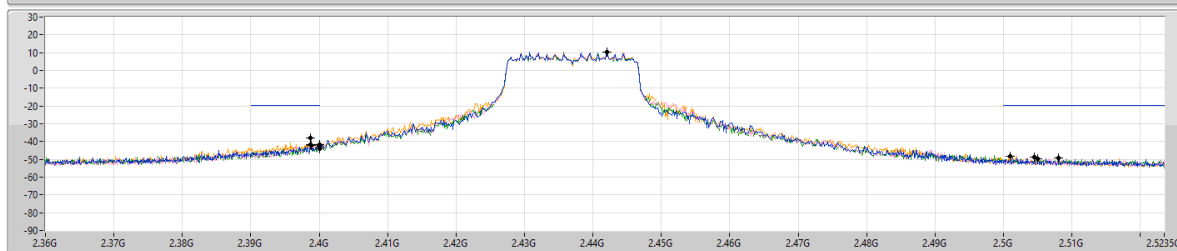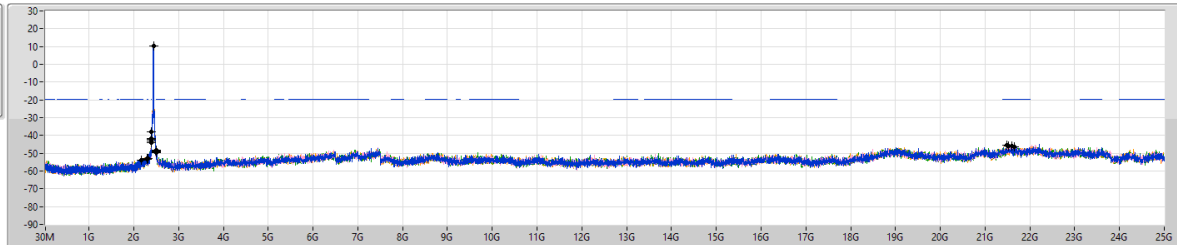RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2
Port 3
Port 4



Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.44208G	10.30	-19.70	2.30874G	-52.91	2.39872G	-41.75	2.4G	-43.89	2.50454G	-48.91	21.60043G	-46.03	1
2.44208G	10.30	-19.70	2.17244G	-54.00	2.3988G	-41.99	2.4G	-43.00	2.50502G	-49.48	21.63381G	-46.21	2
2.44208G	10.30	-19.70	2.30641G	-53.21	2.3988G	-42.19	2.4G	-43.00	2.50798G	-49.09	21.52176G	-46.01	3
2.44208G	10.30	-19.70	2.30525G	-52.78	2.39872G	-38.15	2.4G	-41.61	2.50102G	-48.14	21.48805G	-45.69	4

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX

CSNdB

2462MHz

12/06/2025

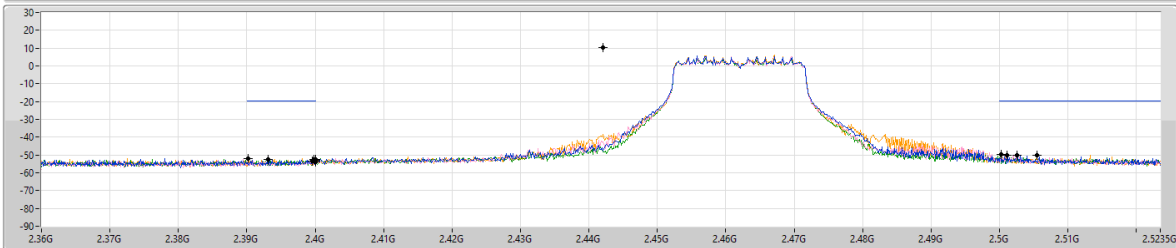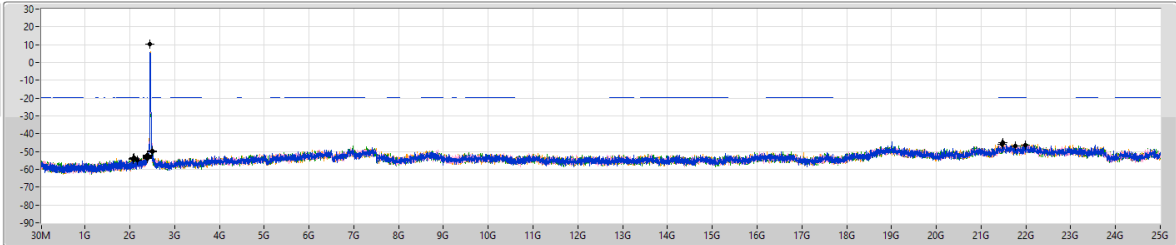RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2
Port 3
Port 4



Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.44208G	10.30	-19.70	2.07225G	-54.17	2.39312G	-52.73	2.4G	-53.02	2.5011G	-50.23	21.47962G	-45.13	1
2.44208G	10.30	-19.70	2.09438G	-53.65	2.3996G	-53.59	2.4G	-53.94	2.50022G	-49.85	21.98534G	-46.20	2
2.44208G	10.30	-19.70	2.06759G	-53.70	2.39984G	-52.63	2.4G	-52.78	2.50262G	-50.17	21.76338G	-46.75	3
2.44208G	10.30	-19.70	2.16079G	-54.61	2.39024G	-51.88	2.4G	-52.38	2.5055G	-50.07	21.46557G	-45.87	4

2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_4TX

CSNdB

2422MHz

12/06/2025

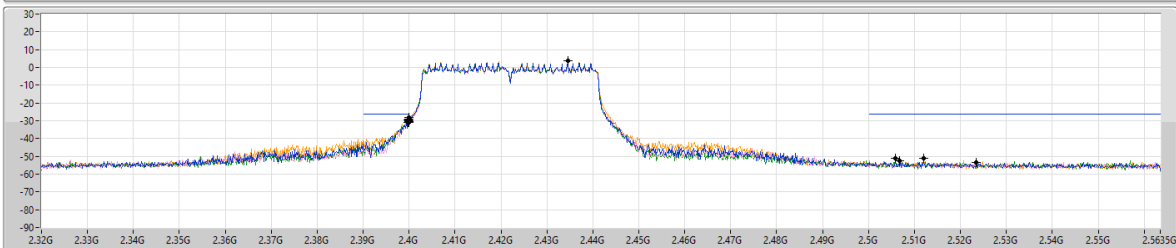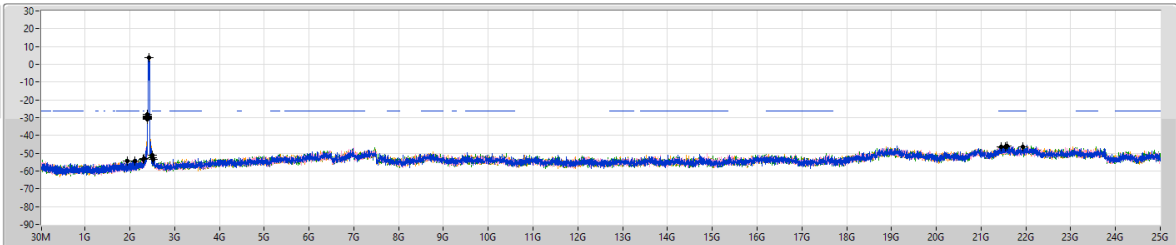RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2
Port 3
Port 4



Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.43457G	3.98	-26.02	2.30283G	-53.29	2.39984G	-30.79	2.4G	-29.23	2.5235G	-53.27	21.57002G	-45.96	1
2.43457G	3.98	-26.02	1.95131G	-54.60	2.4G	-31.01	2.4G	-30.69	2.5067G	-52.32	21.93181G	-46.21	2
2.43457G	3.98	-26.02	2.3097G	-53.10	2.4G	-30.34	2.4G	-29.93	2.5059G	-51.17	21.44942G	-46.19	3
2.43457G	3.98	-26.02	2.10703G	-54.36	2.39984G	-29.54	2.4G	-28.03	2.51198G	-51.31	21.54758G	-46.23	4

2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_4TX

CSNdB

2437MHz

12/06/2025

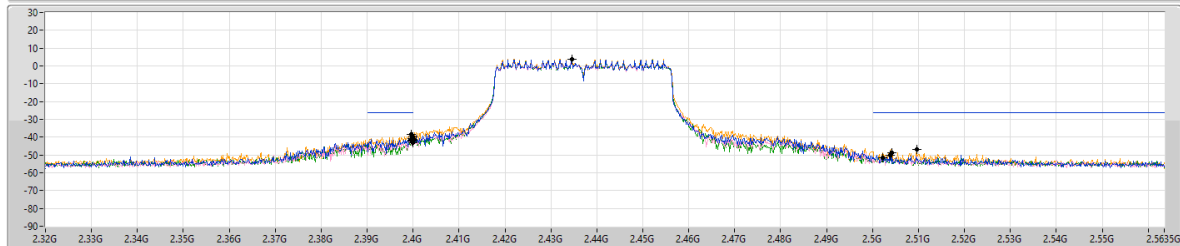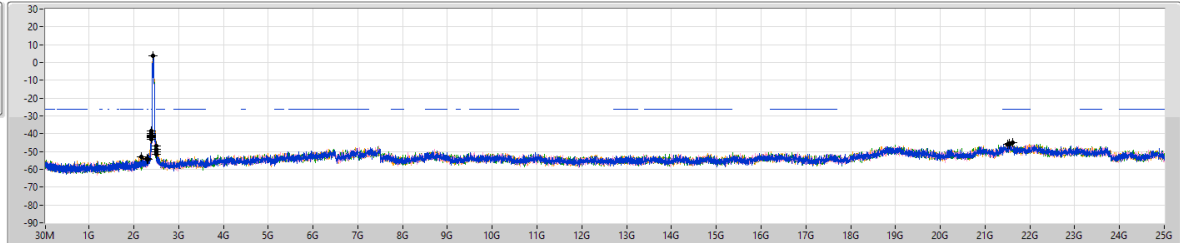RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2
Port 3
Port 4



Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.43457G	3.98	-26.02	2.30397G	-53.93	2.39984G	-40.99	2.4G	-41.17	2.50414G	-48.89	2.53917G	-45.79	1
2.43457G	3.98	-26.02	2.30855G	-54.21	2.39984G	-41.62	2.4G	-42.39	2.50382G	-50.04	2.51112G	-45.84	2
2.43457G	3.98	-26.02	2.30512G	-54.31	2.39984G	-42.35	2.4G	-43.02	2.50222G	-51.55	2.50928G	-44.97	3
2.43457G	3.98	-26.02	2.17344G	-53.09	2.39952G	-38.40	2.4G	-39.85	2.50958G	-46.71	2.53356G	-45.30	4

2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_4TX

CSNdB

2452MHz

12/06/2025

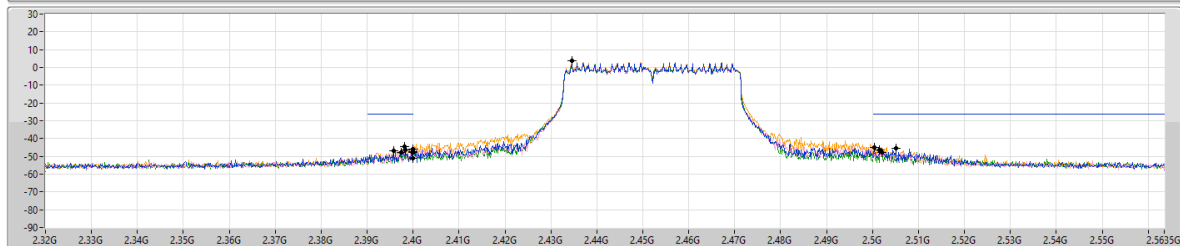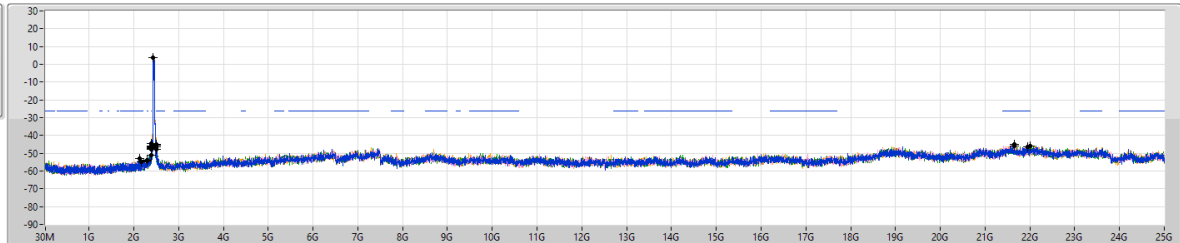RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2
Port 3
Port 4



Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.43457G	3.98	-26.02	2.30397G	-54.00	2.39584G	-47.04	2.4G	-47.52	2.5051G	-45.65	2.519912G	-45.72	1
2.43457G	3.98	-26.02	2.17115G	-54.73	2.3984G	-46.20	2.4G	-47.81	2.50158G	-46.62	2.516977G	-44.81	2
2.43457G	3.98	-26.02	2.1265G	-53.12	2.39744G	-47.97	2.4G	-51.31	2.50206G	-47.85	2.5164574G	-46.11	3
2.43457G	3.98	-26.02	2.30512G	-54.31	2.39808G	-44.36	2.4G	-46.06	2.50046G	-44.82	2.519985G	-46.19	4

2.4-2.4835GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

CSEndB

2412MHz

09/07/2025

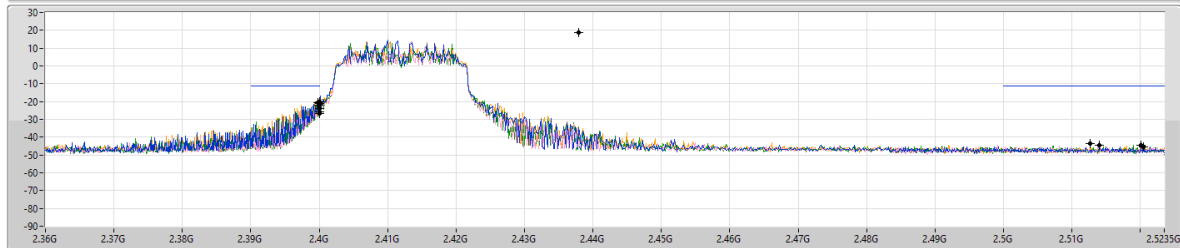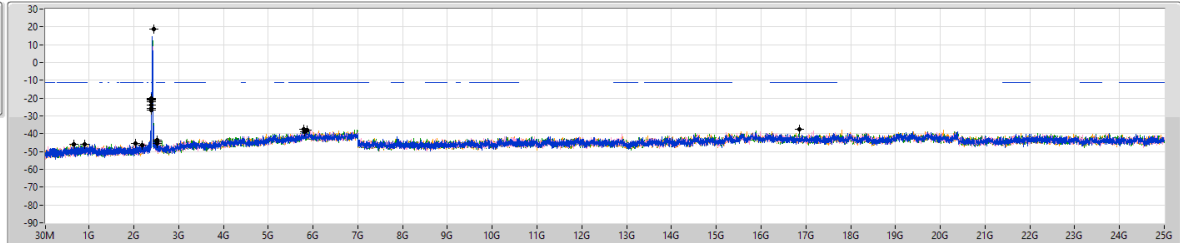RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2
Port 3
Port 4



Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.43791G	18.83	-11.17	656.77M	-46.08	2.39976G	-20.67	2.4G	-21.29	2.52046G	-45.40	5.8135G	-38.87	1
2.43791G	18.83	-11.17	907.25M	-45.99	2.39992G	-22.04	2.4G	-23.94	2.51406G	-44.68	5.79102G	-37.47	2
2.43791G	18.83	-11.17	2.19574G	-46.36	2.4G	-20.32	2.4G	-26.62	2.52006G	-44.56	16.84946G	-37.28	3
2.43791G	18.83	-11.17	2.03497G	-45.67	2.4G	-20.12	2.4G	-25.63	2.5127G	-43.70	5.8725G	-38.07	4

2.4-2.4835GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

CSEndB

2437MHz

09/07/2025

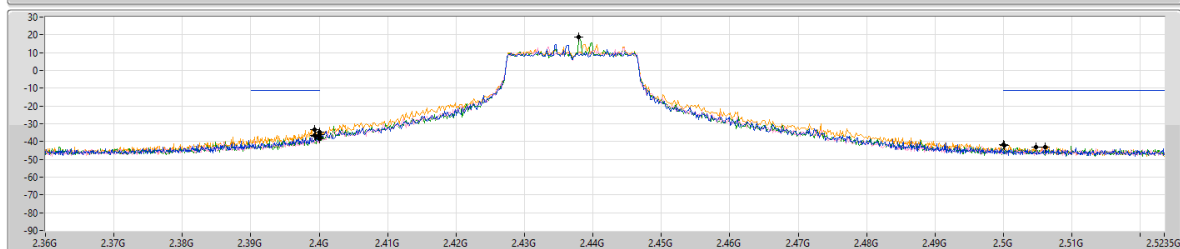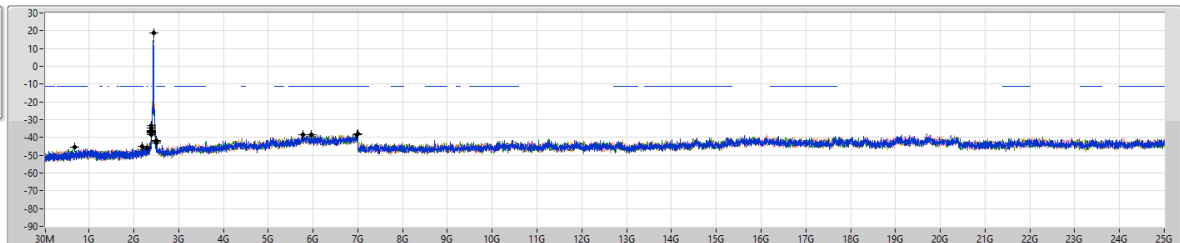RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2
Port 3
Port 4


Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.43791G	18.83	-11.17	2.30525G	-45.88	2.39936G	-36.62	2.4G	-37.50	2.50614G	-43.10	5.77697G	-38.23	1
2.43791G	18.83	-11.17	689.39M	-45.24	2.39944G	-37.23	2.4G	-35.87	2.50478G	-43.12	5.96521G	-38.53	2
2.43791G	18.83	-11.17	2.30292G	-45.99	2.4G	-34.68	2.4G	-38.66	2.50006G	-41.95	6.9907G	-38.24	3
2.43791G	18.83	-11.17	2.18059G	-44.96	2.39936G	-33.51	2.4G	-34.52	2.50014G	-42.09	6.99632G	-37.95	4

2.4-2.4835GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

CSEndB

2462MHz

09/07/2025

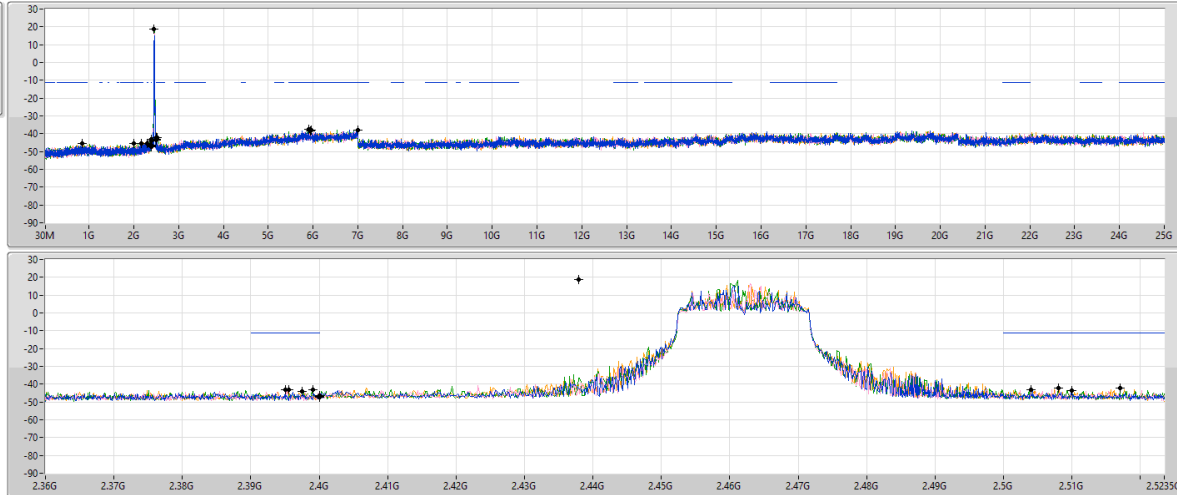RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2
Port 3
Port 4

2.4-2.4835GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

CSEndB

2422MHz

09/07/2025


RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2
Port 3
Port 4

2.4-2.4835GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

CSEndB

2437MHz

09/07/2025

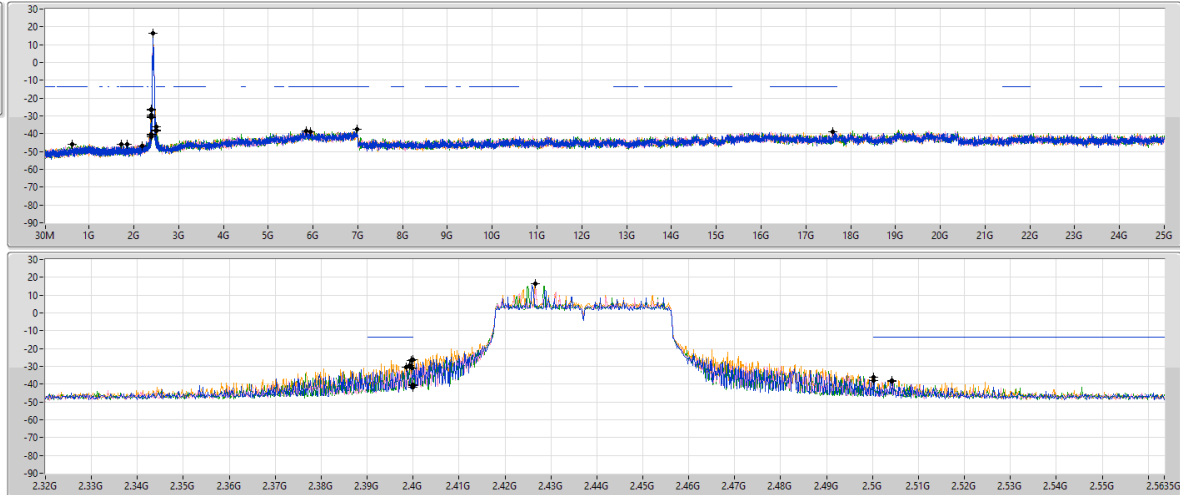
RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2
Port 3
Port 4

2.4-2.4835GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

CSEndB

2452MHz

09/07/2025

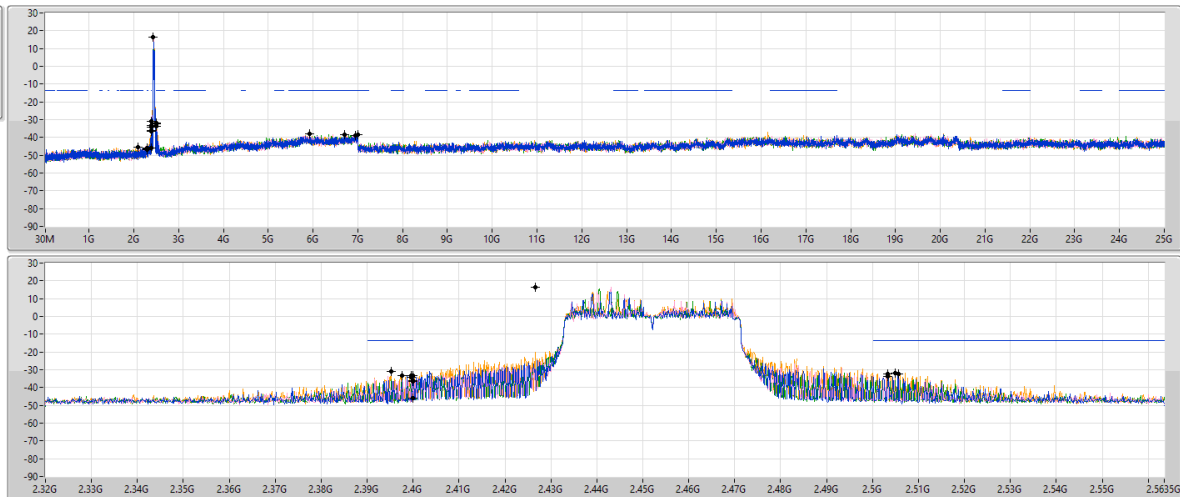RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2
Port 3
Port 4




Radiated Emissions below 1GHz

Appendix F.1

Summary


Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Condition
Mode 1	Pass	QP	227.88M	42.94	46.00	-3.06	Horizontal

Mode 1

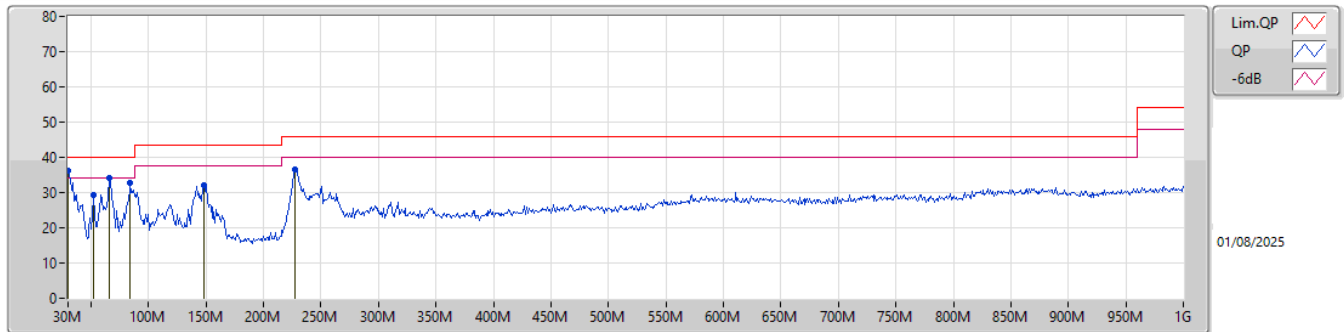

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB/m)	CL (dB)	PA (dB)		
PK	30M	36.26	40.00	-3.74	-7.98	3	Vertical	358	1.50	"Worst"	44.24	23.43	0.95	32.36		
PK	52.31M	29.40	40.00	-10.60	-17.44	3	Vertical	360	1.00	-	46.84	13.34	1.18	31.96		
PK	65.89M	34.29	40.00	-5.71	-18.40	3	Vertical	165	3.00	-	52.69	12.29	1.29	31.98		
PK	84.32M	32.88	40.00	-7.12	-16.98	3	Vertical	197	1.50	-	49.86	13.62	1.43	32.03		
PK	148.34M	32.14	43.50	-11.36	-13.71	3	Vertical	304	1.00	-	45.85	16.50	1.84	32.05		
PK	227.88M	36.50	46.00	-9.50	-13.96	3	Vertical	97	1.25	-	50.46	15.82	2.28	32.06		

Mode 1

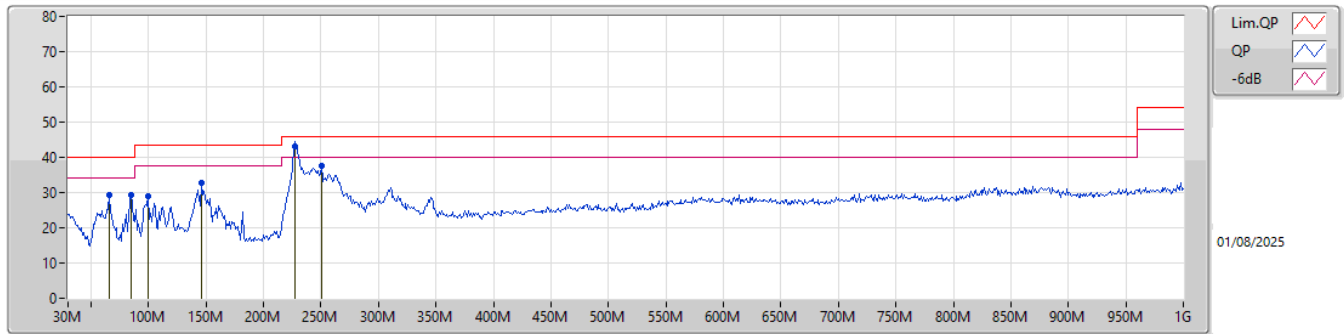

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB/m)	CL (dB)	PA (dB)		
PK	65.89M	29.26	40.00	-10.74	-18.40	3	Horizontal	285	2.00	-	47.66	12.29	1.29	31.98		
PK	85.29M	29.39	40.00	-10.61	-16.74	3	Horizontal	270	2.00	-	46.13	13.86	1.43	32.03		
PK	99.84M	29.08	43.50	-14.42	-13.67	3	Horizontal	212	3.00	-	42.75	16.78	1.53	31.98		
PK	146.4M	32.83	43.50	-10.67	-13.55	3	Horizontal	70	2.00	-	46.38	16.69	1.83	32.07		
QP	227.88M	42.94	46.00	-3.06	-13.96	3	Horizontal	274	1.00	"Worst"	56.90	15.82	2.28	32.06		
PK	250.19M	37.55	46.00	-8.45	-11.35	3	Horizontal	275	1.25	-	48.90	18.32	2.40	32.07		




Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-
802.11b_Nss1.(1Mbps)_4TX	Pass	AV	2.39G	53.91	54.00	-0.09	3	Vertical	323	3.00	-

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

2412MHz_TX

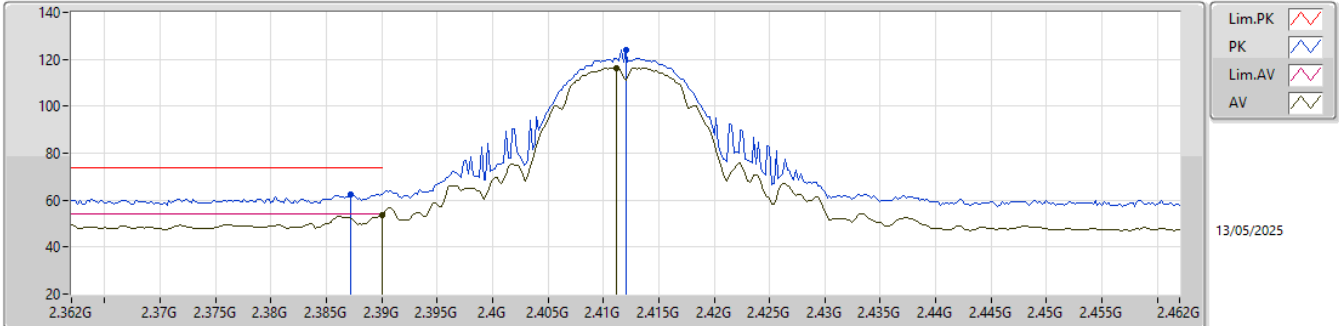


EUT_Z_4TX
Setting 20.5
02-D-E-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3872G	62.31	74.00	-11.69	29.75	3	Vertical	325	2.98	-	28.50	4.06	-			
AV	2.39G	53.45	54.00	-0.55	20.89	3	Vertical	325	2.98	-	28.50	4.06	-			
PK	2.412G	124.09	Inf	-Inf	91.59	3	Vertical	325	2.98	-	28.42	4.08	-			
AV	2.4112G	116.31	Inf	-Inf	83.82	3	Vertical	325	2.98	-	28.41	4.08	-			

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

2412MHz_TX

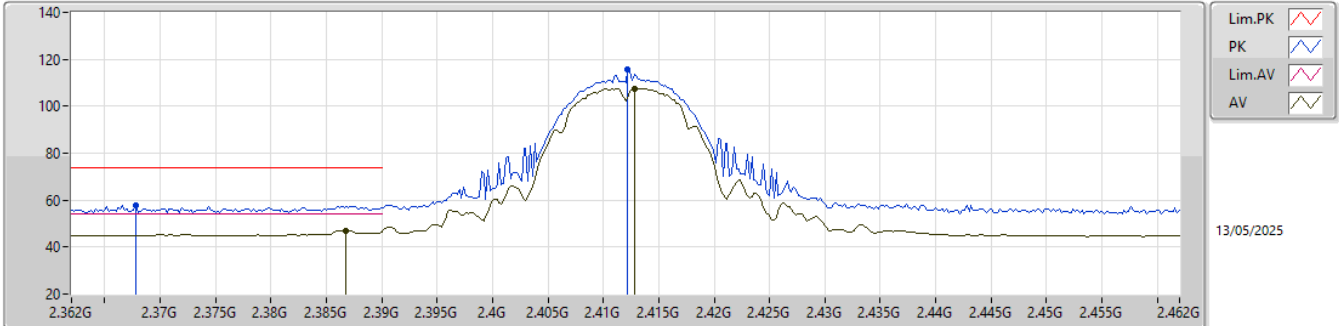


EUT_Z_4TX
Setting 20.5
02-D-E-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3678G	57.72	74.00	-16.28	25.29	3	Horizontal	209	2.92	-	28.38	4.05	-			
AV	2.3868G	47.03	54.00	-6.97	14.47	3	Horizontal	209	2.92	-	28.50	4.06	-			
PK	2.4122G	115.46	Inf	-Inf	82.96	3	Horizontal	209	2.92	-	28.42	4.08	-			
AV	2.4128G	107.65	Inf	-Inf	75.14	3	Horizontal	209	2.92	-	28.43	4.08	-			

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

2412MHz_TX

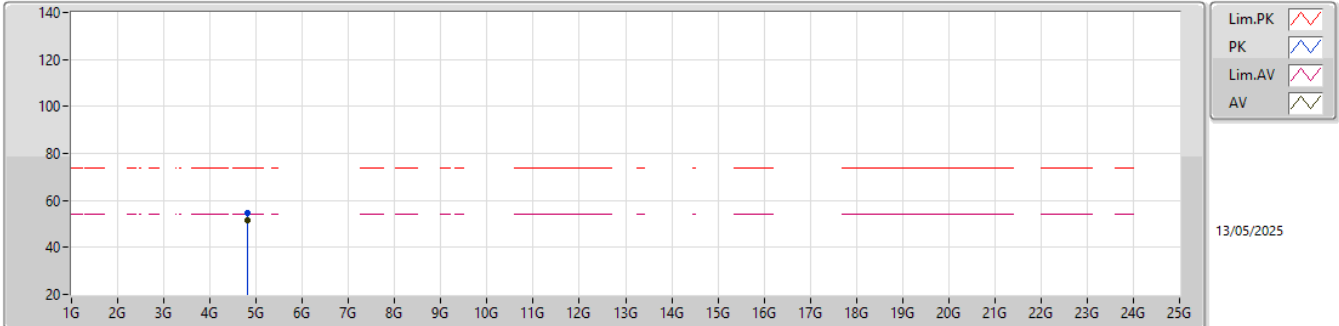


EUT_Z_4TX
Setting 20.5
02-D-E-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.8241G	54.91	74.00	-19.09	46.18	3	Vertical	216	2.52	-	32.95	6.78	31.00			
AV	4.824G	51.30	54.00	-2.70	42.57	3	Vertical	216	2.52	-	32.95	6.78	31.00			

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

2412MHz_TX

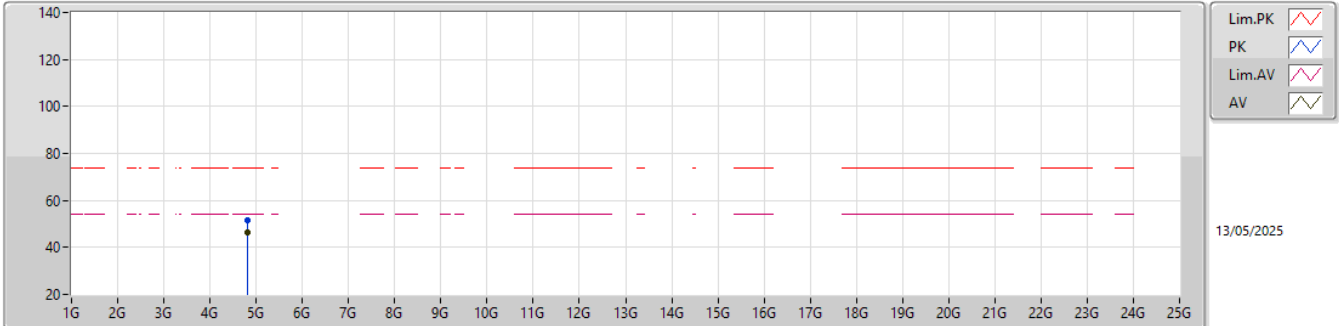


EUT_Z_4TX
Setting 20.5
02-D-E-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.8239G	51.37	74.00	-22.63	42.64	3	Horizontal	10	2.07	-	32.95	6.78	31.00			
AV	4.824G	46.21	54.00	-7.79	37.48	3	Horizontal	10	2.07	-	32.95	6.78	31.00			

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

2417MHz_TX

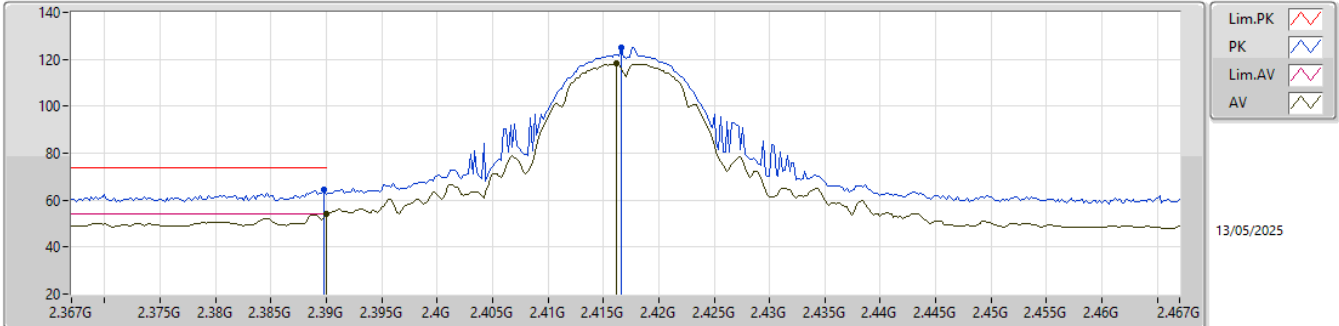


EUT_Z_4TX
Setting 22
02-D-E-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3898G	64.40	74.00	-9.60	31.84	3	Vertical	323	3.00	-	28.50	4.06	-			
AV	2.39G	53.91	54.00	-0.09	21.35	3	Vertical	323	3.00	-	28.50	4.06	-			
PK	2.4166G	125.25	Inf	-Inf	92.70	3	Vertical	323	3.00	-	28.47	4.08	-			
AV	2.4162G	118.06	Inf	-Inf	85.52	3	Vertical	323	3.00	-	28.46	4.08	-			

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

2417MHz_TX

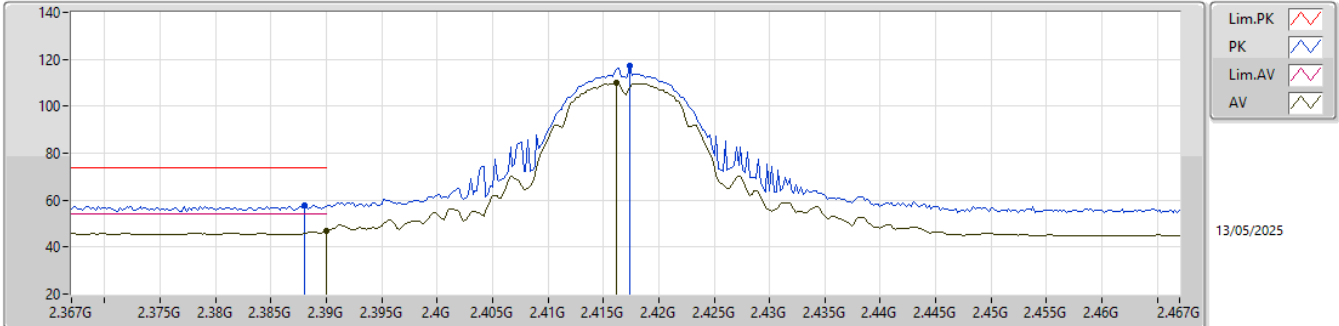


EUT_Z_4TX
Setting 22
02-D-E-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.388G	57.74	74.00	-16.26	25.18	3	Horizontal	209	2.93	-	28.50	4.06	-			
AV	2.39G	46.94	54.00	-7.06	14.38	3	Horizontal	209	2.93	-	28.50	4.06	-			
PK	2.4174G	117.41	Inf	-Inf	84.86	3	Horizontal	209	2.93	-	28.47	4.08	-			
AV	2.4162G	109.80	Inf	-Inf	77.26	3	Horizontal	209	2.93	-	28.46	4.08	-			

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

2437MHz_TX

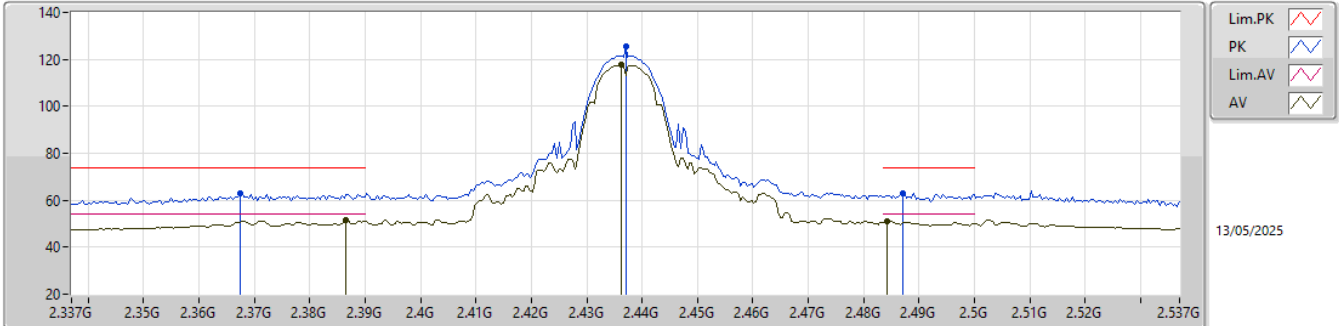


EUT_Z_4TX
Setting 23.5
02-D-E-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3674G	63.01	74.00	-10.99	30.59	3	Vertical	55	2.62	-	28.37	4.05	-			
AV	2.3866G	51.78	54.00	-2.22	19.22	3	Vertical	55	2.62	-	28.50	4.06	-			
PK	2.437G	125.36	Inf	-Inf	92.86	3	Vertical	55	2.62	-	28.40	4.10	-			
AV	2.4362G	117.75	Inf	-Inf	85.25	3	Vertical	55	2.62	-	28.40	4.10	-			
PK	2.487G	62.96	74.00	-11.04	30.35	3	Vertical	55	2.62	-	28.47	4.14	-			
AV	2.4842G	51.21	54.00	-2.79	18.64	3	Vertical	55	2.62	-	28.44	4.13	-			

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

2437MHz_TX

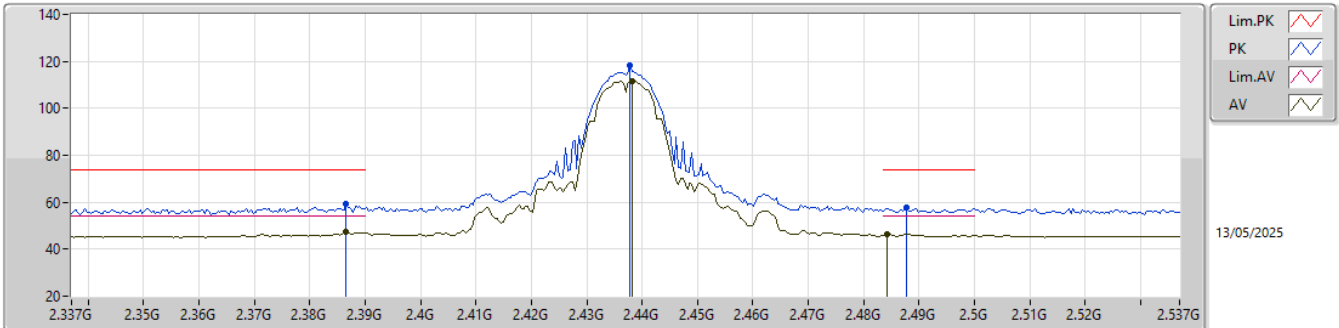


EUT_Z_4TX
Setting 23.5
02-D-E-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3866G	59.22	74.00	-14.78	26.66	3	Horizontal	210	2.63	-	28.50	4.06	-			
AV	2.3866G	47.28	54.00	-6.72	14.72	3	Horizontal	210	2.63	-	28.50	4.06	-			
PK	2.4378G	118.37	Inf	-Inf	85.87	3	Horizontal	210	2.63	-	28.40	4.10	-			
AV	2.4382G	111.49	Inf	-Inf	78.99	3	Horizontal	210	2.63	-	28.40	4.10	-			
PK	2.4878G	57.93	74.00	-16.07	25.31	3	Horizontal	210	2.63	-	28.48	4.14	-			
AV	2.4842G	46.43	54.00	-7.57	13.86	3	Horizontal	210	2.63	-	28.44	4.13	-			

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

2437MHz_TX

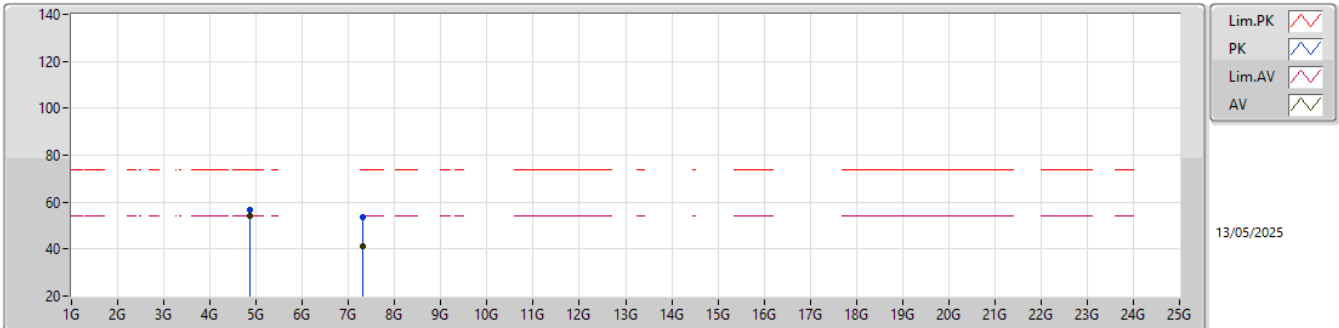


EUT_Z_4TX
Setting 23.5
02-D-E-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.87404G	56.66	74.00	-17.34	47.75	3	Vertical	205	2.55	-	33.10	6.81	31.00			
AV	4.874G	53.89	54.00	-0.11	44.98	3	Vertical	205	2.55	-	33.10	6.81	31.00			
PK	7.30872G	53.79	74.00	-20.21	39.33	3	Vertical	160	1.80	-	36.52	9.37	31.43			
AV	7.31262G	41.04	54.00	-12.96	26.57	3	Vertical	160	1.80	-	36.53	9.37	31.43			

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

2437MHz_TX

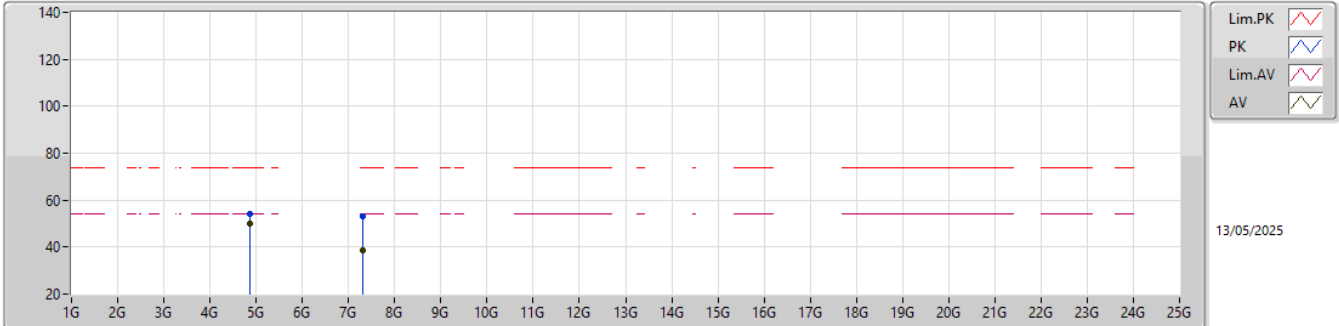


EUT_Z_4TX
Setting 23.5
02-D-E-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.87396G	53.90	74.00	-20.10	44.99	3	Horizontal	21	2.12	-	33.10	6.81	31.00			
AV	4.87398G	50.22	54.00	-3.78	41.31	3	Horizontal	21	2.12	-	33.10	6.81	31.00			
PK	7.30894G	52.94	74.00	-21.06	38.48	3	Horizontal	270	1.67	-	36.52	9.37	31.43			
AV	7.31266G	38.38	54.00	-15.62	23.91	3	Horizontal	270	1.67	-	36.53	9.37	31.43			

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

2457MHz_TX

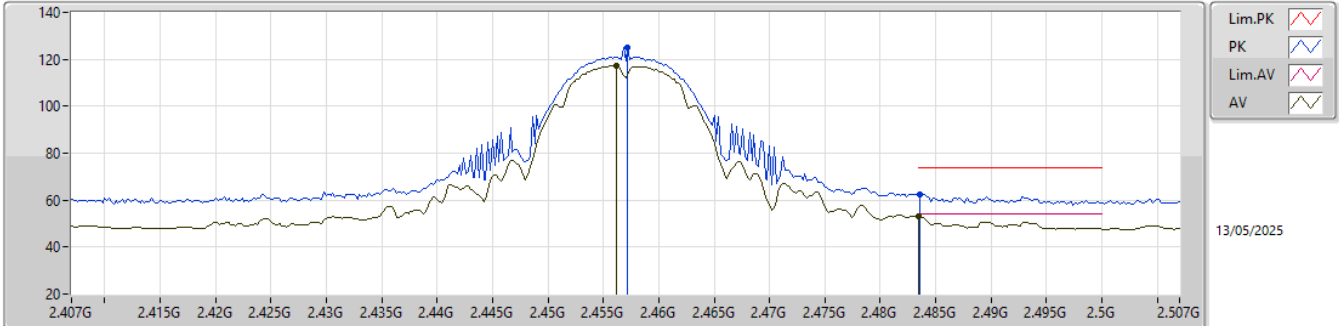


EUT_Z_4TX
Setting 22
02-D-E-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.4572G	124.95	Inf	-Inf	92.44	3	Vertical	327	2.64	-	28.40	4.11	-			
AV	2.4562G	117.25	Inf	-Inf	84.74	3	Vertical	327	2.64	-	28.40	4.11	-			
PK	2.4836G	62.60	74.00	-11.40	30.03	3	Vertical	327	2.64	-	28.44	4.13	-			
AV	2.4835G	53.35	54.00	-0.65	20.78	3	Vertical	327	2.64	-	28.44	4.13	-			

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

2457MHz_TX

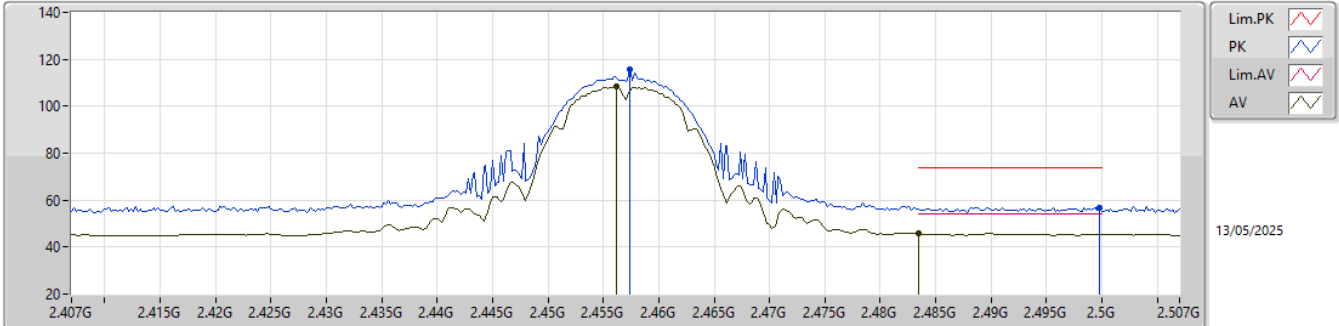


EUT_Z_4TX
Setting 22
02-D-E-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	2.4574G	115.62	Inf	-Inf	83.11	3	Horizontal	80	2.52	-	28.40	4.11	-				
AV	2.4562G	108.26	Inf	-Inf	75.75	3	Horizontal	80	2.52	-	28.40	4.11	-				
PK	2.4998G	56.93	74.00	-17.07	24.19	3	Horizontal	80	2.52	-	28.60	4.14	-				
AV	2.4835G	45.72	54.00	-8.28	13.15	3	Horizontal	80	2.52	-	28.44	4.13	-				

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

2462MHz_TX

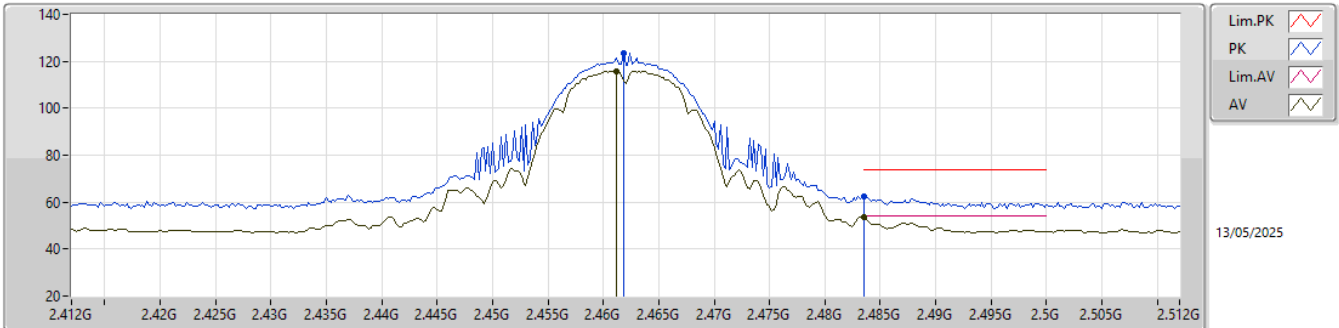


EUT_Z_4TX
Setting 21
02-D-E-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.4618G	123.57	Inf	-Inf	91.05	3	Vertical	330	2.66	-	28.40	4.12	-			
AV	2.4612G	115.68	Inf	-Inf	83.16	3	Vertical	330	2.66	-	28.40	4.12	-			
PK	2.4835G	62.34	74.00	-11.66	29.78	3	Vertical	330	2.66	-	28.43	4.13	-			
AV	2.4835G	53.60	54.00	-0.40	21.04	3	Vertical	330	2.66	-	28.43	4.13	-			

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

2462MHz_TX

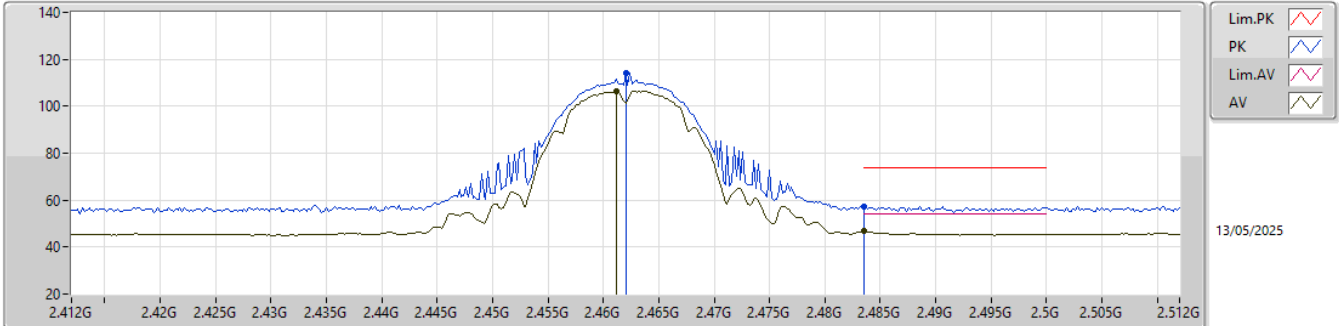


EUT_Z_4TX
Setting 21
02-D-E-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	2.462G	114.17	Inf	-Inf	81.65	3	Horizontal	337	1.07	-	28.40	4.12	-				
AV	2.4612G	106.49	Inf	-Inf	73.97	3	Horizontal	337	1.07	-	28.40	4.12	-				
PK	2.4835G	57.48	74.00	-16.52	24.92	3	Horizontal	337	1.07	-	28.43	4.13	-				
AV	2.4835G	46.68	54.00	-7.32	14.12	3	Horizontal	337	1.07	-	28.43	4.13	-				

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

2462MHz_TX

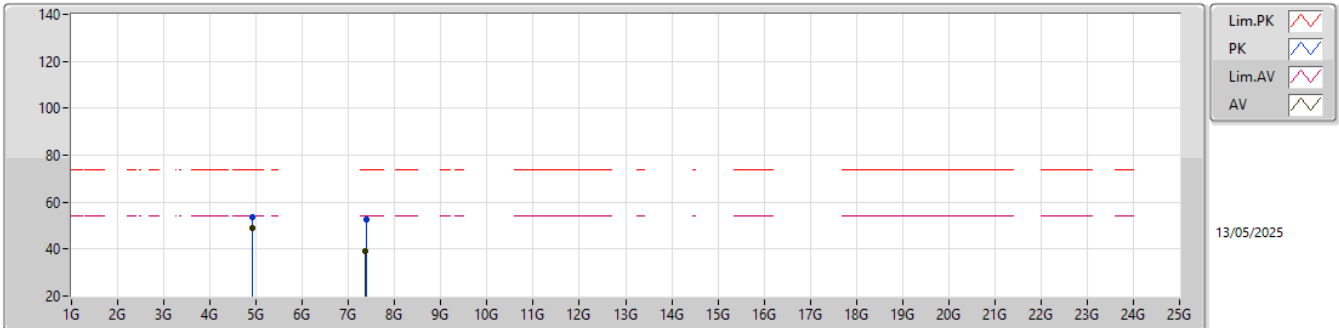


EUT_Z_4TX
Setting 21
02-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.924G	53.38	74.00	-20.62	44.30	3	Vertical	204	2.65	-	33.25	6.84	31.01			
AV	4.92398G	48.98	54.00	-5.02	39.90	3	Vertical	204	2.65	-	33.25	6.84	31.01			
PK	7.38138G	52.73	74.00	-21.27	38.13	3	Vertical	30	2.47	-	36.66	9.37	31.43			
AV	7.37208G	39.06	54.00	-14.94	24.48	3	Vertical	30	2.47	-	36.64	9.37	31.43			

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

2462MHz_TX

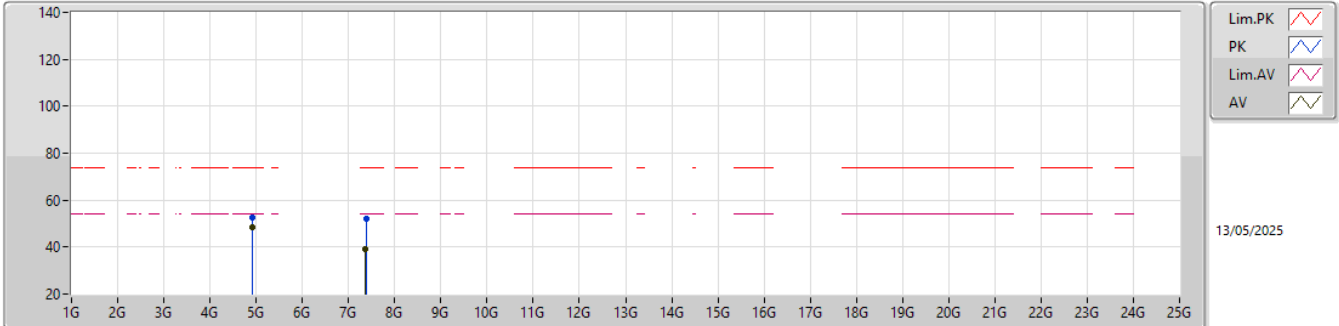


EUT_Z_4TX
Setting 21
02-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.92398G	52.48	74.00	-21.52	43.40	3	Horizontal	16	2.53	-	33.25	6.84	31.01			
AV	4.92402G	48.55	54.00	-5.45	39.47	3	Horizontal	16	2.53	-	33.25	6.84	31.01			
PK	7.37694G	51.96	74.00	-22.04	37.37	3	Horizontal	110	1.98	-	36.65	9.37	31.43			
AV	7.37184G	38.95	54.00	-15.05	24.37	3	Horizontal	110	1.98	-	36.64	9.37	31.43			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

2412MHz_TX

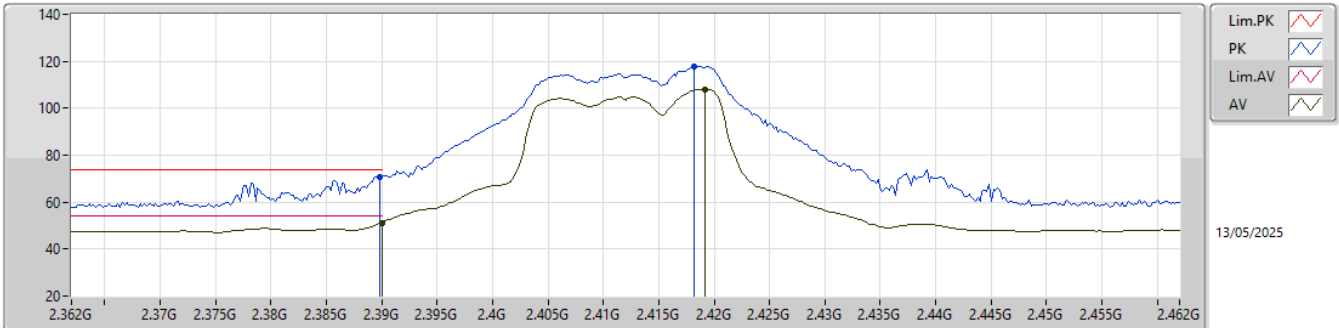


EUT_Z_4TX
Setting 21
02-D-E-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3898G	70.75	74.00	-3.25	38.19	3	Vertical	54	3.00	-	28.50	4.06	-			
AV	2.39G	51.18	54.00	-2.82	18.62	3	Vertical	54	3.00	-	28.50	4.06	-			
PK	2.4182G	117.65	Inf	-Inf	85.09	3	Vertical	54	3.00	-	28.48	4.08	-			
AV	2.4192G	107.93	Inf	-Inf	75.36	3	Vertical	54	3.00	-	28.49	4.08	-			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

2412MHz_TX

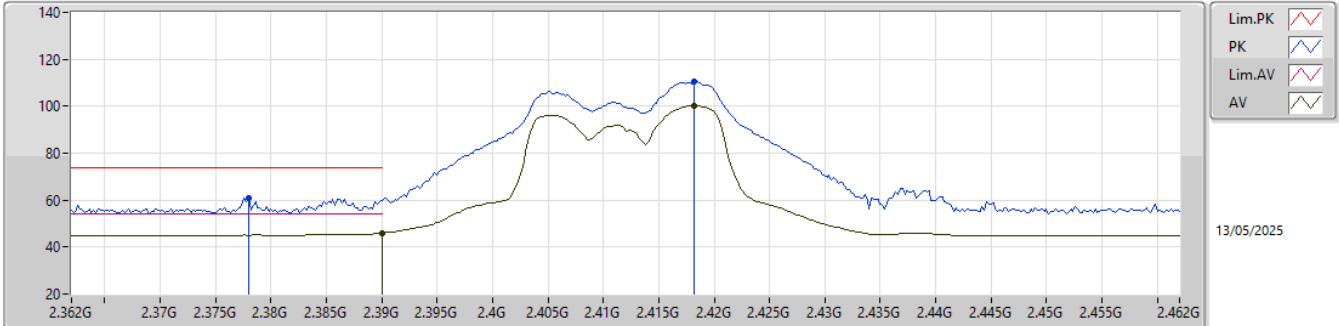


EUT_Z_4TX
Setting 21
02-D-E-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.378G	60.95	74.00	-13.05	28.42	3	Horizontal	314	1.69	-	28.48	4.05	-			
AV	2.39G	45.85	54.00	-8.15	13.29	3	Horizontal	314	1.69	-	28.50	4.06	-			
PK	2.4182G	110.61	Inf	-Inf	78.05	3	Horizontal	314	1.69	-	28.48	4.08	-			
AV	2.4182G	100.19	Inf	-Inf	67.63	3	Horizontal	314	1.69	-	28.48	4.08	-			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

2412MHz_TX

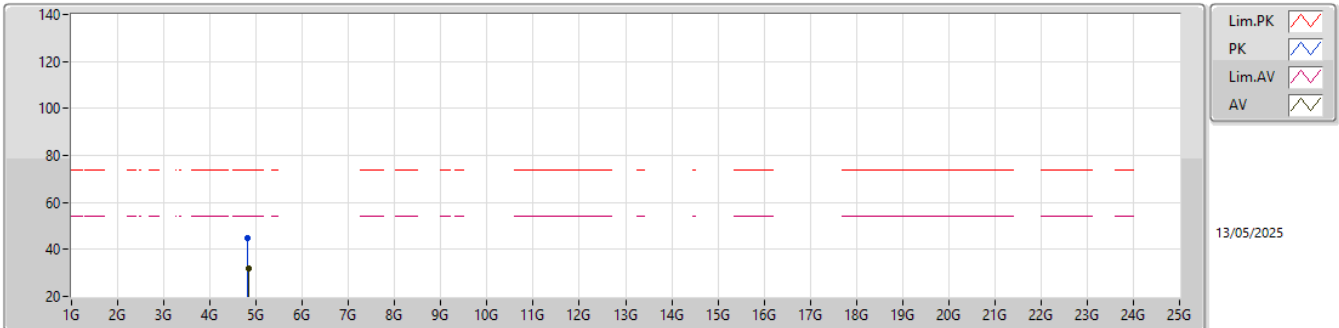


EUT_Z_4TX
Setting 21
02-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.81698G	44.65	74.00	-29.35	35.94	3	Vertical	111	1.78	-	32.93	6.78	31.00			
AV	4.8276G	31.70	54.00	-22.30	22.95	3	Vertical	111	1.78	-	32.96	6.79	31.00			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

2412MHz_TX

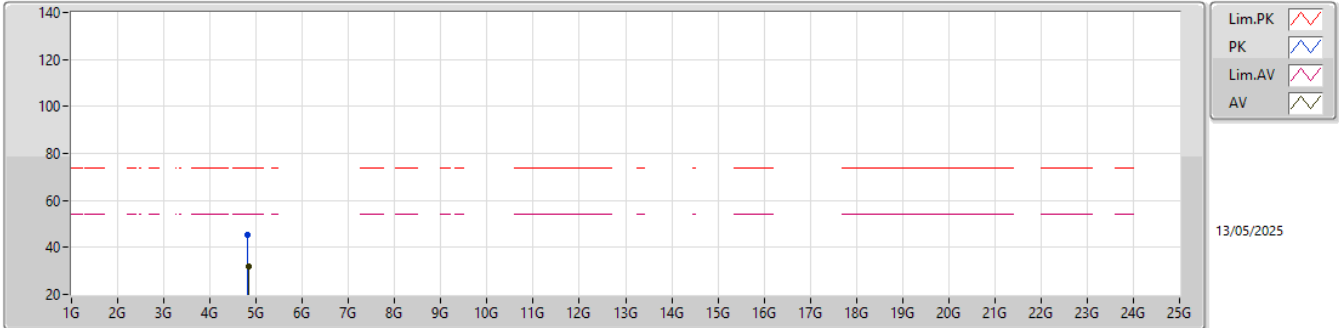


EUT_Z_4TX
Setting 21
02-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.81152G	45.09	74.00	-28.91	36.39	3	Horizontal	13	2.78	-	32.92	6.78	31.00			
AV	4.83642G	31.69	54.00	-22.31	22.93	3	Horizontal	13	2.78	-	32.97	6.79	31.00			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

2417MHz_TX

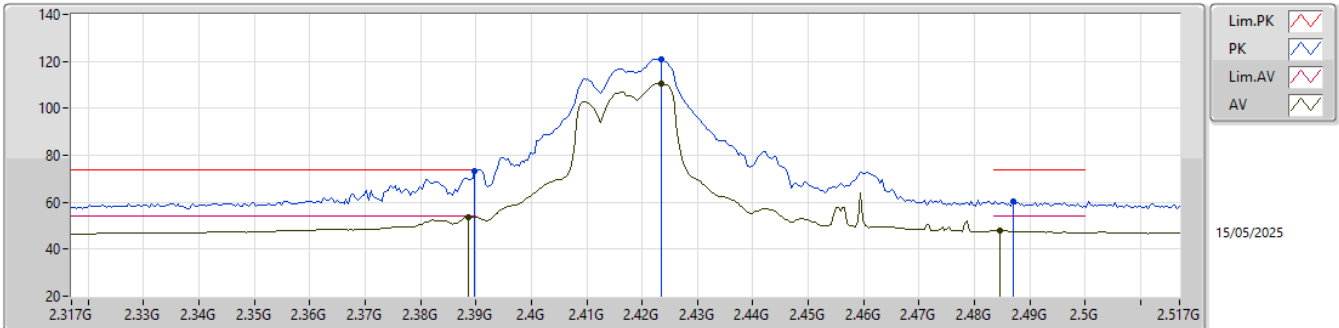


EUT_Z_4TX
Setting 22.5
02-D-C-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3898G	73.24	74.00	-0.76	40.68	3	Vertical	302	1.00	-	28.50	4.06	-			
AV	2.3886G	53.56	54.00	-0.44	21.00	3	Vertical	302	1.00	-	28.50	4.06	-			
PK	2.4234G	120.75	Inf	-Inf	88.19	3	Vertical	302	1.00	-	28.47	4.09	-			
AV	2.4234G	110.70	Inf	-Inf	78.14	3	Vertical	302	1.00	-	28.47	4.09	-			
PK	2.487G	60.17	74.00	-13.83	27.56	3	Vertical	302	1.00	-	28.47	4.14	-			
AV	2.4846G	47.86	54.00	-6.14	15.28	3	Vertical	302	1.00	-	28.45	4.13	-			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

2417MHz_TX

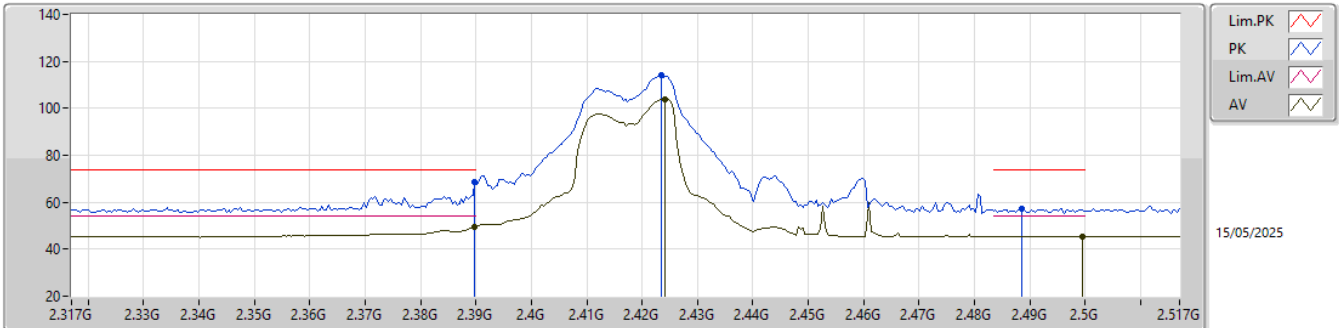


EUT_Z_4TX
Setting 22.5
02-D-C-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3898G	68.65	74.00	-5.35	36.09	3	Horizontal	46	1.11	-	28.50	4.06	-			
AV	2.3898G	49.67	54.00	-4.33	17.11	3	Horizontal	46	1.11	-	28.50	4.06	-			
PK	2.4234G	113.92	Inf	-Inf	81.36	3	Horizontal	46	1.11	-	28.47	4.09	-			
AV	2.4242G	103.86	Inf	-Inf	71.31	3	Horizontal	46	1.11	-	28.46	4.09	-			
PK	2.4886G	57.14	74.00	-16.86	24.51	3	Horizontal	46	1.11	-	28.49	4.14	-			
AV	2.4994G	45.38	54.00	-8.62	12.65	3	Horizontal	46	1.11	-	28.59	4.14	-			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

2437MHz_TX

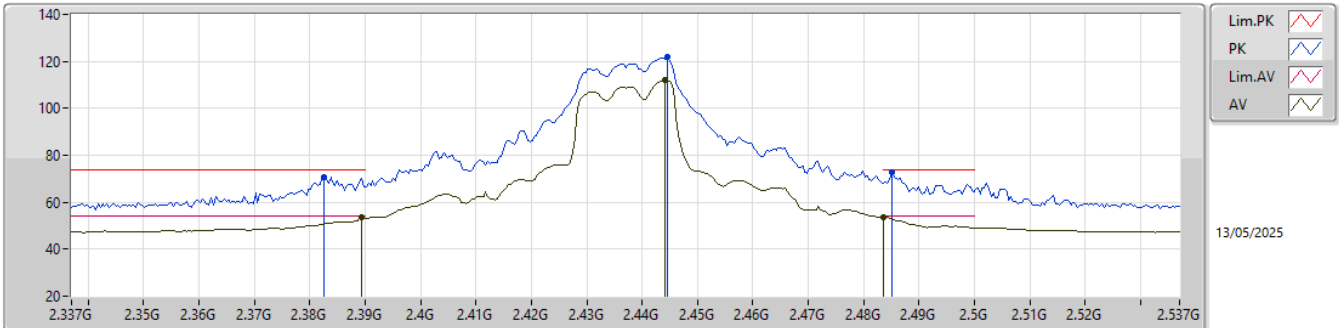


EUT_Z_4TX
Setting 25
02-D-E-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3826G	70.61	74.00	-3.39	38.05	3	Vertical	54	3.00	-	28.50	4.06	-			
AV	2.3894G	53.60	54.00	-0.40	21.04	3	Vertical	54	3.00	-	28.50	4.06	-			
PK	2.4446G	121.81	Inf	-Inf	89.31	3	Vertical	54	3.00	-	28.40	4.10	-			
AV	2.4442G	111.86	Inf	-Inf	79.36	3	Vertical	54	3.00	-	28.40	4.10	-			
PK	2.485G	73.01	74.00	-0.99	40.43	3	Vertical	54	3.00	-	28.45	4.13	-			
AV	2.4835G	53.70	54.00	-0.30	21.13	3	Vertical	54	3.00	-	28.44	4.13	-			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

2437MHz_TX

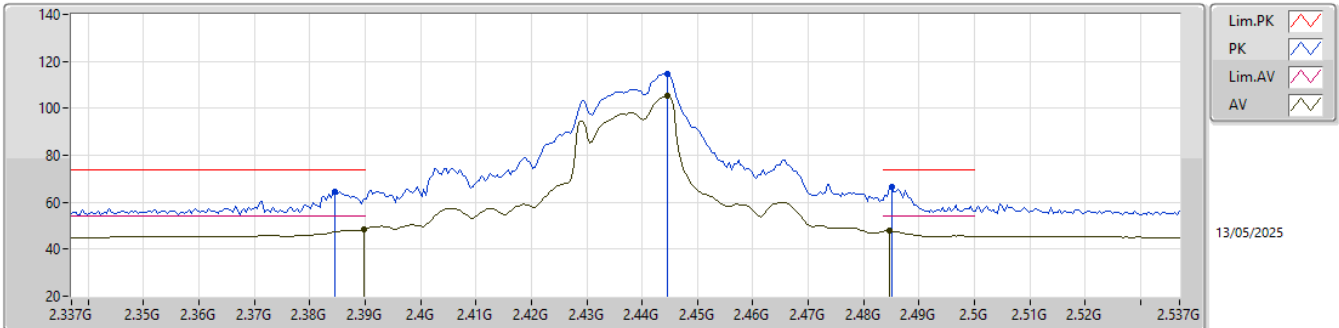


EUT_Z_4TX
Setting 25
02-D-E-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3846G	64.59	74.00	-9.41	32.03	3	Horizontal	131	2.38	-	28.50	4.06	-			
AV	2.3898G	48.36	54.00	-5.64	15.80	3	Horizontal	131	2.38	-	28.50	4.06	-			
PK	2.4446G	114.75	Inf	-Inf	82.25	3	Horizontal	131	2.38	-	28.40	4.10	-			
AV	2.4446G	105.26	Inf	-Inf	72.76	3	Horizontal	131	2.38	-	28.40	4.10	-			
PK	2.485G	66.73	74.00	-7.27	34.15	3	Horizontal	131	2.38	-	28.45	4.13	-			
AV	2.4846G	47.84	54.00	-6.16	15.26	3	Horizontal	131	2.38	-	28.45	4.13	-			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

2437MHz_TX

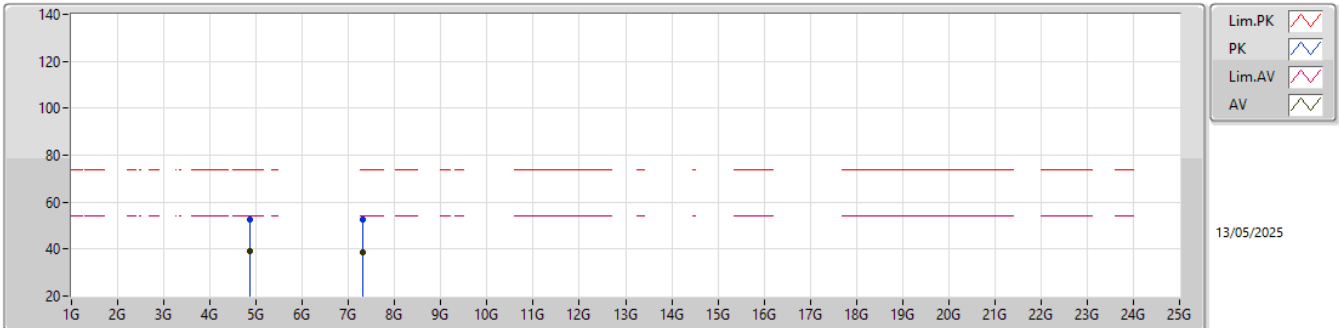


EUT_Z_4TX
Setting 25
02-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.86848G	52.40	74.00	-21.60	43.52	3	Vertical	203	2.50	-	33.07	6.81	31.00			
AV	4.86716G	39.06	54.00	-14.94	30.18	3	Vertical	203	2.50	-	33.07	6.81	31.00			
PK	7.29636G	52.67	74.00	-21.33	38.24	3	Vertical	218	1.97	-	36.49	9.37	31.43			
AV	7.30464G	38.74	54.00	-15.26	24.29	3	Vertical	218	1.97	-	36.51	9.37	31.43			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

2437MHz_TX

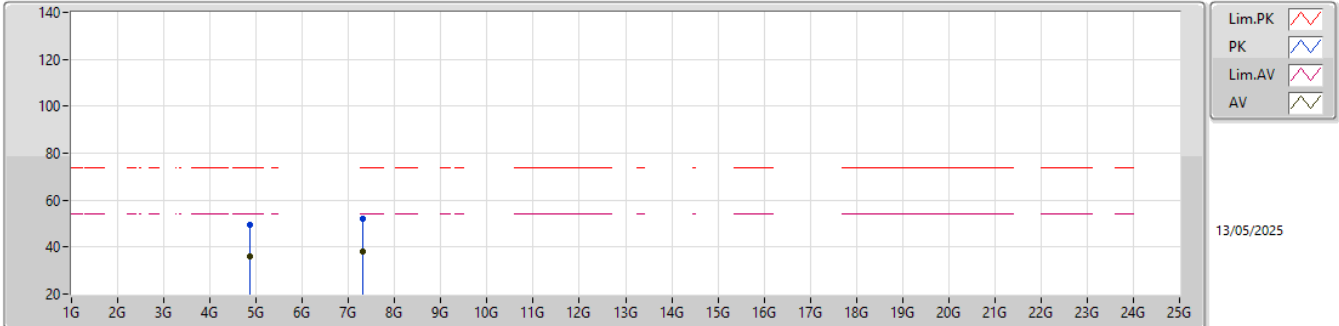


EUT_Z_4TX
Setting 25
02-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.86782G	49.37	74.00	-24.63	40.49	3	Horizontal	18	2.46	-	33.07	6.81	31.00			
AV	4.8674G	36.25	54.00	-17.75	27.37	3	Horizontal	18	2.46	-	33.07	6.81	31.00			
PK	7.30104G	52.04	74.00	-21.96	37.60	3	Horizontal	148	2.20	-	36.50	9.37	31.43			
AV	7.3029G	38.36	54.00	-15.64	23.91	3	Horizontal	148	2.20	-	36.51	9.37	31.43			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

2457MHz_TX

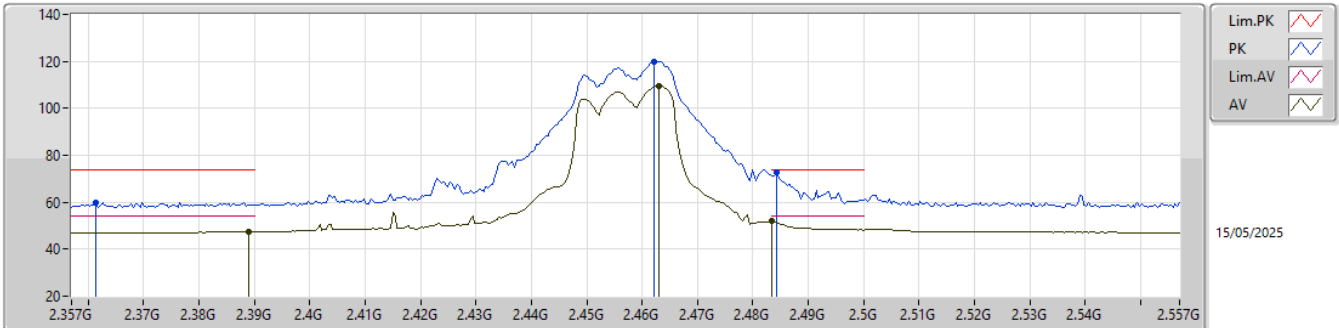


EUT_Z_4TX
Setting 21
02-D-C-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3614G	60.08	74.00	-13.92	27.73	3	Vertical	304	1.00	-	28.31	4.04	-			
AV	2.389G	47.51	54.00	-6.49	14.95	3	Vertical	304	1.00	-	28.50	4.06	-			
PK	2.4622G	119.66	Inf	-Inf	87.14	3	Vertical	304	1.00	-	28.40	4.12	-			
AV	2.463G	109.29	Inf	-Inf	76.77	3	Vertical	304	1.00	-	28.40	4.12	-			
PK	2.4842G	72.69	74.00	-1.31	40.12	3	Vertical	304	1.00	-	28.44	4.13	-			
AV	2.4835G	51.92	54.00	-2.08	19.36	3	Vertical	304	1.00	-	28.43	4.13	-			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

2457MHz_TX

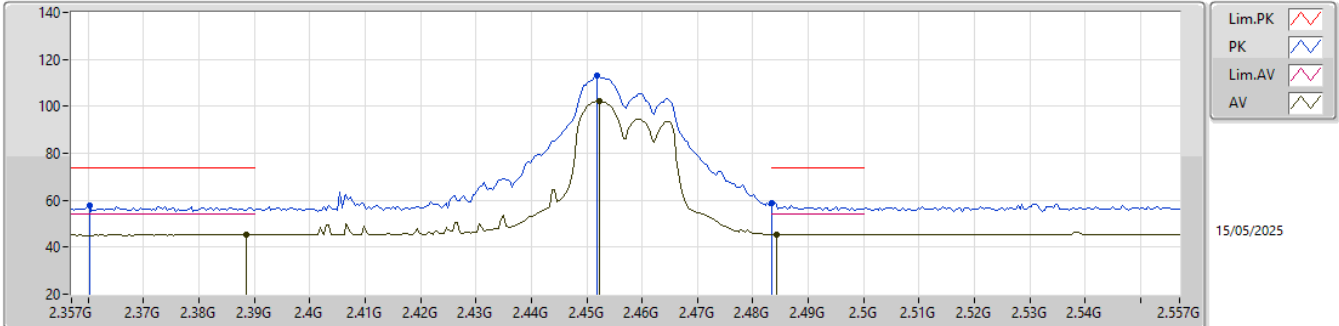


EUT_Z_4TX
Setting 21
02-D-C-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3602G	57.99	74.00	-16.01	25.65	3	Horizontal	47	3.00	-	28.30	4.04	-			
AV	2.3886G	45.24	54.00	-8.76	12.68	3	Horizontal	47	3.00	-	28.50	4.06	-			
PK	2.4518G	113.32	Inf	-Inf	80.81	3	Horizontal	47	3.00	-	28.40	4.11	-			
AV	2.4522G	102.23	Inf	-Inf	69.72	3	Horizontal	47	3.00	-	28.40	4.11	-			
PK	2.4835G	58.94	74.00	-15.06	26.38	3	Horizontal	47	3.00	-	28.43	4.13	-			
AV	2.4842G	45.46	54.00	-8.54	12.89	3	Horizontal	47	3.00	-	28.44	4.13	-			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

2462MHz_TX

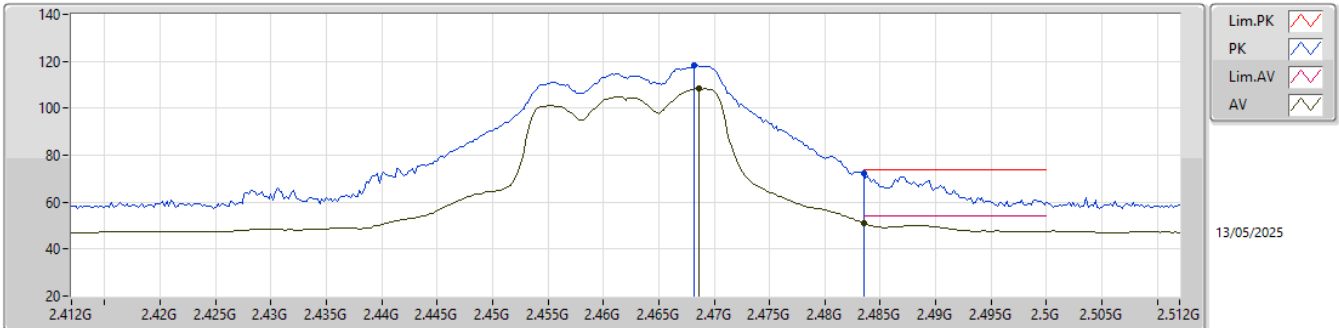


EUT_Z_4TX
Setting 20.5
02-D-E-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.4682G	118.40	Inf	-Inf	85.88	3	Vertical	55	2.44	-	28.40	4.12	-			
AV	2.4686G	108.29	Inf	-Inf	75.77	3	Vertical	55	2.44	-	28.40	4.12	-			
PK	2.4835G	72.43	74.00	-1.57	39.86	3	Vertical	55	2.44	-	28.44	4.13	-			
AV	2.4835G	51.13	54.00	-2.87	18.56	3	Vertical	55	2.44	-	28.44	4.13	-			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

2462MHz_TX

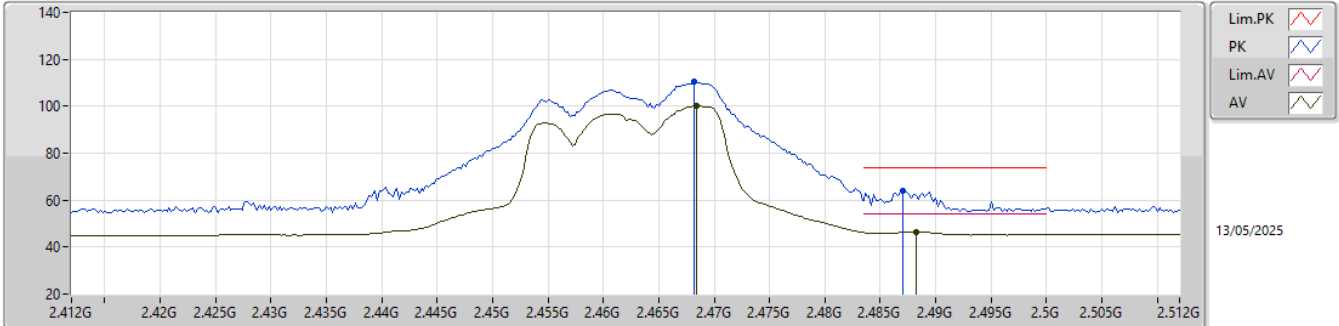


EUT_Z_4TX
Setting 20.5
02-D-E-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.4682G	110.31	Inf	-Inf	77.79	3	Horizontal	126	2.61	-	28.40	4.12	-			
AV	2.4684G	100.18	Inf	-Inf	67.66	3	Horizontal	126	2.61	-	28.40	4.12	-			
PK	2.487G	64.02	74.00	-9.98	31.41	3	Horizontal	126	2.61	-	28.47	4.14	-			
AV	2.4882G	46.45	54.00	-7.55	13.83	3	Horizontal	126	2.61	-	28.48	4.14	-			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

2462MHz_TX

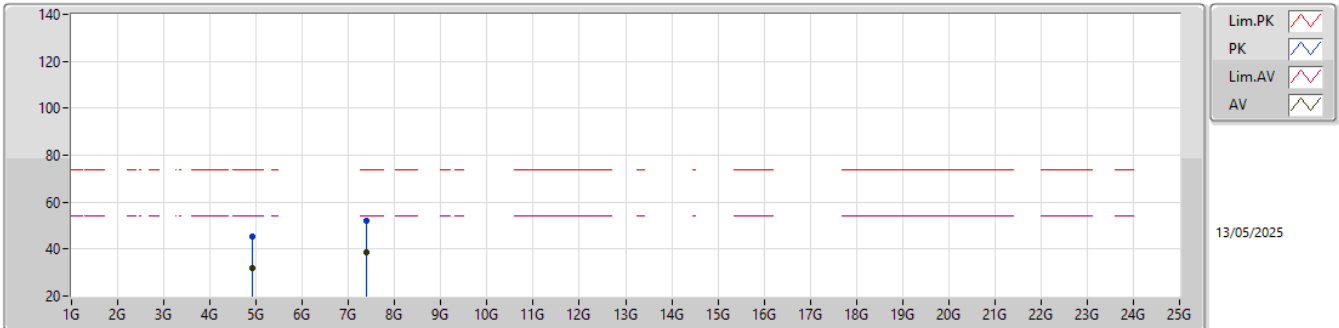


EUT_Z_4TX
Setting 20.5
02-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.91548G	45.19	74.00	-28.81	36.13	3	Vertical	12	1.24	-	33.23	6.83	31.00			
AV	4.92286G	32.13	54.00	-21.87	23.05	3	Vertical	12	1.24	-	33.25	6.84	31.01			
PK	7.3755G	52.13	74.00	-21.87	37.54	3	Vertical	200	1.50	-	36.65	9.37	31.43			
AV	7.37754G	38.86	54.00	-15.14	24.26	3	Vertical	200	1.50	-	36.66	9.37	31.43			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

2462MHz_TX

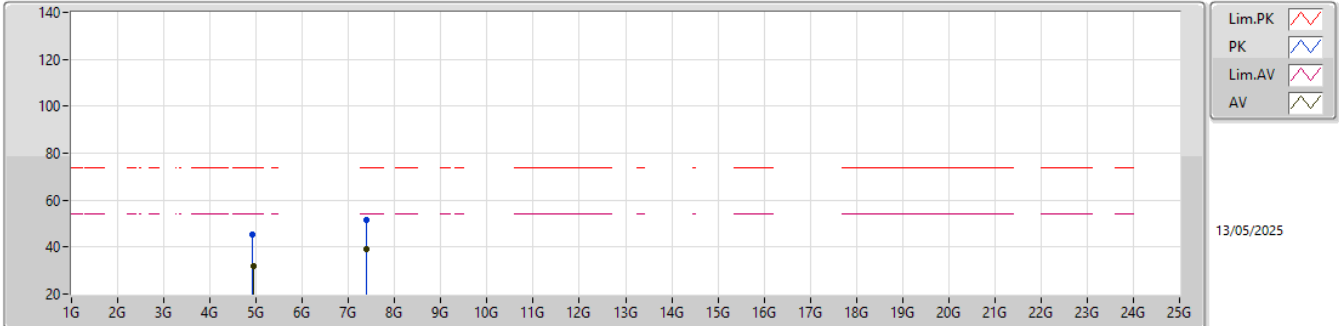


EUT_Z_4TX
Setting 20.5
02-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.92196G	45.16	74.00	-28.84	36.09	3	Horizontal	97	2.32	-	33.24	6.84	31.01			
AV	4.939G	32.07	54.00	-21.93	22.95	3	Horizontal	97	2.32	-	33.28	6.85	31.01			
PK	7.37988G	51.73	74.00	-22.27	37.13	3	Horizontal	179	1.71	-	36.66	9.37	31.43			
AV	7.37508G	38.91	54.00	-15.09	24.32	3	Horizontal	179	1.71	-	36.65	9.37	31.43			

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX

2412MHz_TX

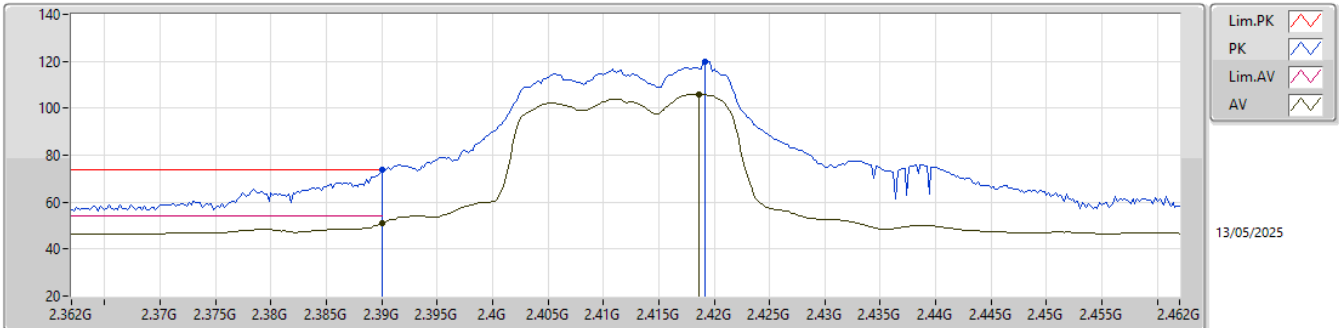


EUT_Z_4TX
Setting 19.5
02-D-E-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.39G	73.60	74.00	-0.40	41.04	3	Vertical	53	2.78	-	28.50	4.06	-			
AV	2.39G	50.87	54.00	-3.13	18.31	3	Vertical	53	2.78	-	28.50	4.06	-			
PK	2.4192G	119.84	Inf	-Inf	87.27	3	Vertical	53	2.78	-	28.49	4.08	-			
AV	2.4186G	105.95	Inf	-Inf	73.38	3	Vertical	53	2.78	-	28.49	4.08	-			

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX

2412MHz_TX

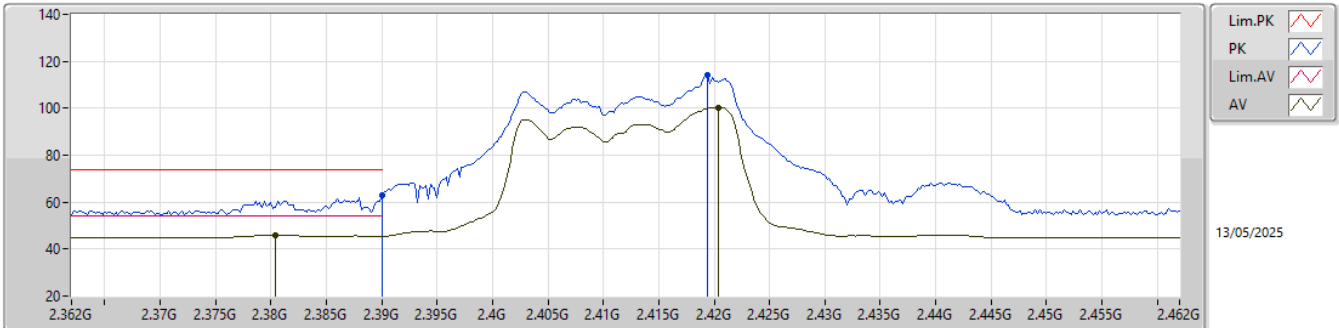


EUT_Z_4TX
Setting 19.5
02-D-E-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.39G	62.84	74.00	-11.16	30.28	3	Horizontal	133	2.57	-	28.50	4.06	-			
AV	2.3804G	46.07	54.00	-7.93	13.51	3	Horizontal	133	2.57	-	28.50	4.06	-			
PK	2.4194G	113.99	Inf	-Inf	81.42	3	Horizontal	133	2.57	-	28.49	4.08	-			
AV	2.4204G	100.24	Inf	-Inf	67.65	3	Horizontal	133	2.57	-	28.50	4.09	-			

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX

2412MHz_TX

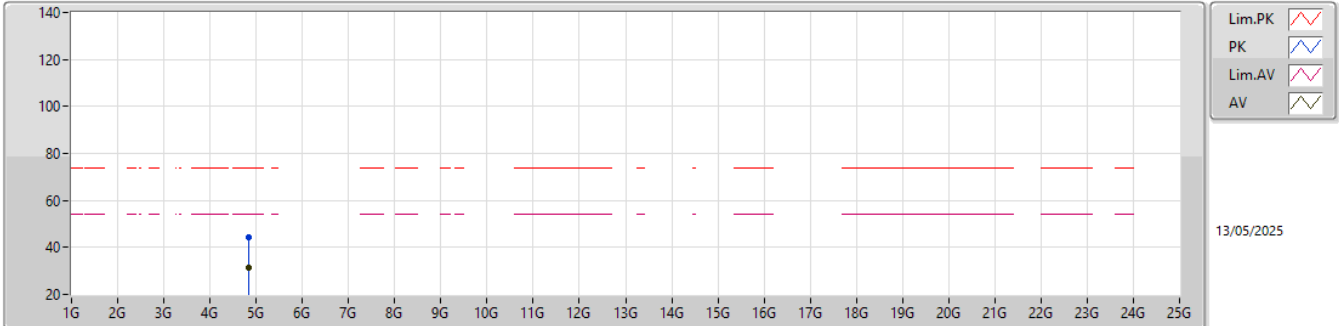


EUT_Z_4TX
Setting 19.5
02-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	4.83882G	44.29	74.00	-29.71	35.52	3	Vertical	158	1.04	-	32.98	6.79	31.00			
AV	4.83552G	31.62	54.00	-22.38	22.86	3	Vertical	158	1.04	-	32.97	6.79	31.00			

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX

2412MHz_TX

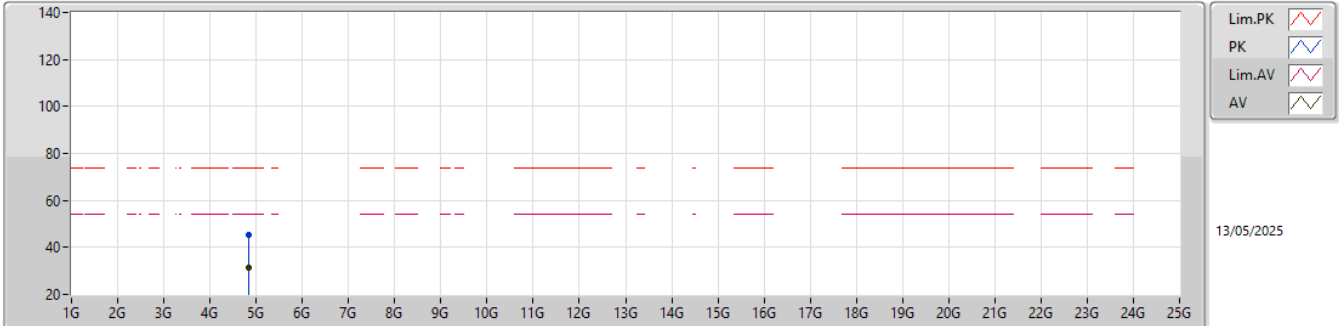


EUT_Z_4TX
Setting 19.5
02-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.83444G	45.14	74.00	-28.86	36.38	3	Horizontal	95	2.87	-	32.97	6.79	31.00			
AV	4.83546G	31.57	54.00	-22.43	22.81	3	Horizontal	95	2.87	-	32.97	6.79	31.00			

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX

2417MHz_TX

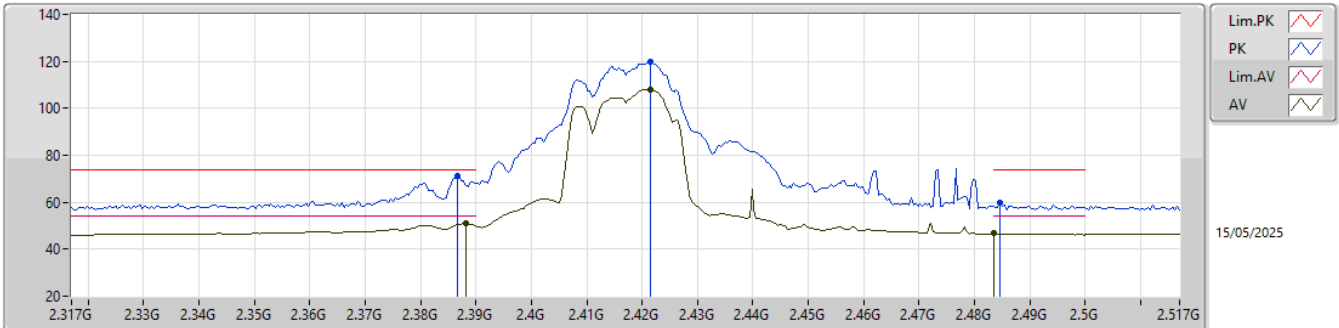


EUT_Z_4TX
Setting 21.5
02-D-C-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	2.3866G	71.10	74.00	-2.90	38.54	3	Vertical	136	1.12	-	28.50	4.06	-				
AV	2.3882G	50.93	54.00	-3.07	18.37	3	Vertical	136	1.12	-	28.50	4.06	-				
PK	2.4214G	120.05	Inf	-Inf	87.47	3	Vertical	136	1.12	-	28.49	4.09	-				
AV	2.4214G	108.02	Inf	-Inf	75.44	3	Vertical	136	1.12	-	28.49	4.09	-				
PK	2.4846G	59.65	74.00	-14.35	27.07	3	Vertical	136	1.12	-	28.45	4.13	-				
AV	2.4835G	46.71	54.00	-7.29	14.14	3	Vertical	136	1.12	-	28.44	4.13	-				

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX

2417MHz_TX

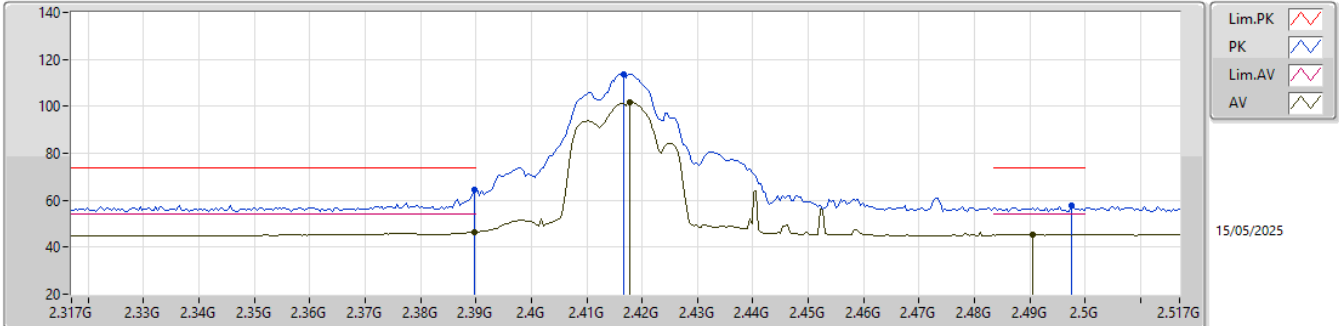


EUT_Z_4TX
Setting 21.5
02-D-C-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3898G	64.56	74.00	-9.44	32.00	3	Horizontal	153	1.85	-	28.50	4.06	-			
AV	2.3898G	46.42	54.00	-7.58	13.86	3	Horizontal	153	1.85	-	28.50	4.06	-			
PK	2.4166G	113.80	Inf	-Inf	81.25	3	Horizontal	153	1.85	-	28.47	4.08	-			
AV	2.4178G	101.51	Inf	-Inf	68.95	3	Horizontal	153	1.85	-	28.48	4.08	-			
PK	2.4974G	57.54	74.00	-16.46	24.83	3	Horizontal	153	1.85	-	28.57	4.14	-			
AV	2.4906G	45.21	54.00	-8.79	12.56	3	Horizontal	153	1.85	-	28.51	4.14	-			

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX

2437MHz_TX

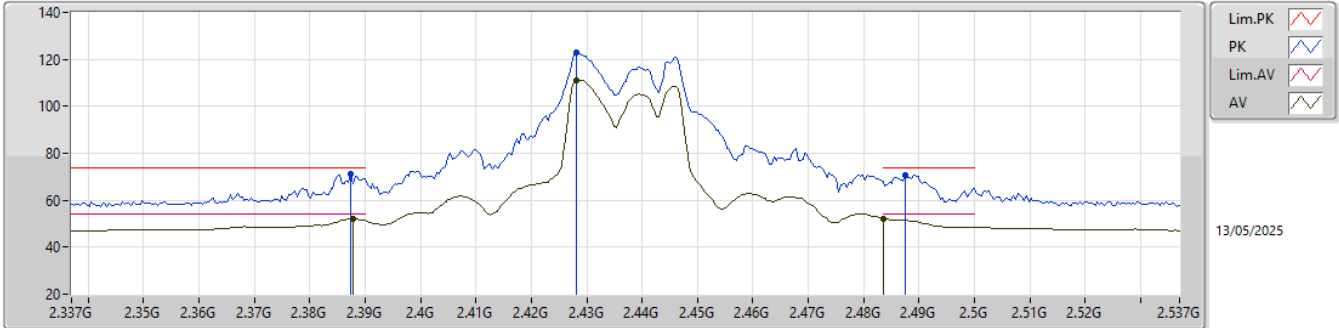


EUT_Z_4TX
Setting 23.5
02-D-E-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3874G	71.24	74.00	-2.76	38.68	3	Vertical	126	2.84	-	28.50	4.06	-			
AV	2.3878G	52.00	54.00	-2.00	19.44	3	Vertical	126	2.84	-	28.50	4.06	-			
PK	2.4282G	122.81	Inf	-Inf	90.30	3	Vertical	126	2.84	-	28.42	4.09	-			
AV	2.4282G	111.18	Inf	-Inf	78.67	3	Vertical	126	2.84	-	28.42	4.09	-			
PK	2.4874G	70.78	74.00	-3.22	38.17	3	Vertical	126	2.84	-	28.47	4.14	-			
AV	2.4835G	52.04	54.00	-1.96	19.47	3	Vertical	126	2.84	-	28.44	4.13	-			

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX

2437MHz_TX

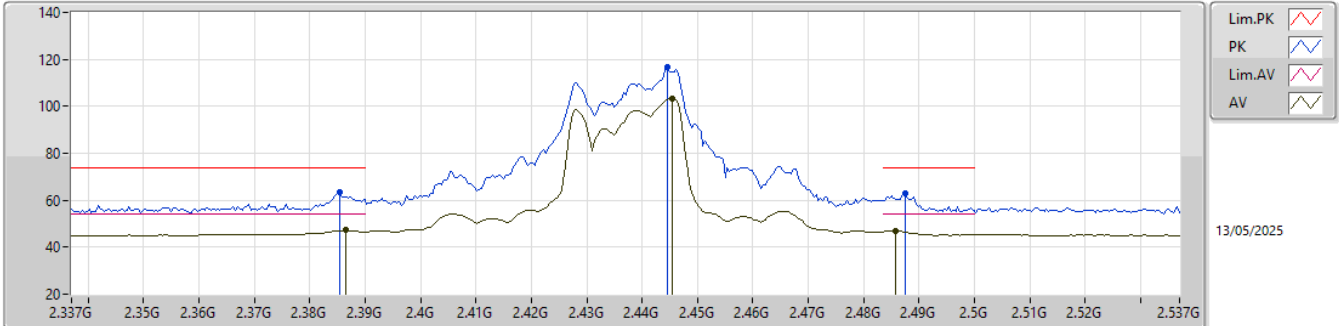


EUT_Z_4TX
Setting 23.5
02-D-E-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3854G	63.32	74.00	-10.68	30.76	3	Horizontal	133	2.41	-	28.50	4.06	-			
AV	2.3866G	47.19	54.00	-6.81	14.63	3	Horizontal	133	2.41	-	28.50	4.06	-			
PK	2.4446G	116.70	Inf	-Inf	84.20	3	Horizontal	133	2.41	-	28.40	4.10	-			
AV	2.4454G	103.36	Inf	-Inf	70.86	3	Horizontal	133	2.41	-	28.40	4.10	-			
PK	2.4874G	62.83	74.00	-11.17	30.22	3	Horizontal	133	2.41	-	28.47	4.14	-			
AV	2.4858G	46.84	54.00	-7.16	14.25	3	Horizontal	133	2.41	-	28.46	4.13	-			

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX

2437MHz_TX

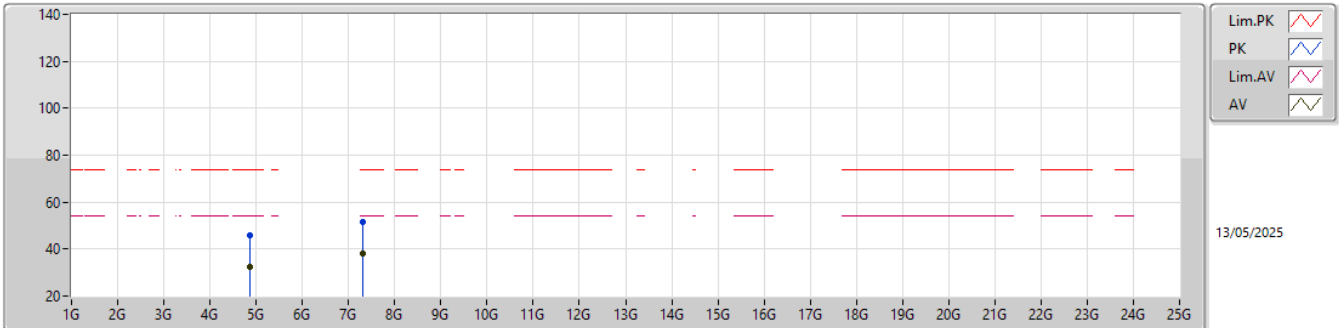


EUT_Z_4TX
Setting 23.5
02-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.87502G	45.77	74.00	-28.23	36.86	3	Vertical	105	2.74	-	33.10	6.81	31.00			
AV	4.86608G	32.57	54.00	-21.43	23.70	3	Vertical	105	2.74	-	33.06	6.81	31.00			
PK	7.2999G	51.31	74.00	-22.69	36.87	3	Vertical	36	1.89	-	36.50	9.37	31.43			
AV	7.3044G	38.32	54.00	-15.68	23.87	3	Vertical	36	1.89	-	36.51	9.37	31.43			

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX

2437MHz_TX

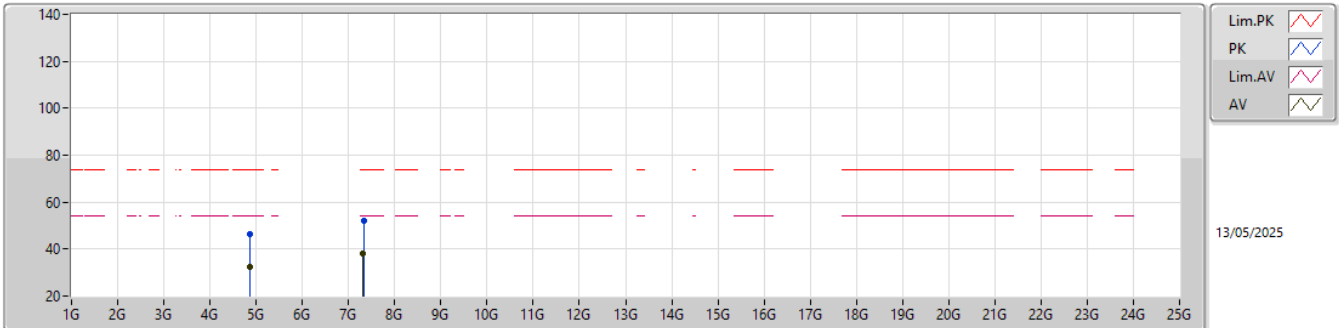


EUT_Z_4TX
Setting 23.5
02-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.86698G	46.18	74.00	-27.82	37.30	3	Horizontal	328	1.76	-	33.07	6.81	31.00			
AV	4.86632G	32.55	54.00	-21.45	23.67	3	Horizontal	328	1.76	-	33.07	6.81	31.00			
PK	7.32282G	51.97	74.00	-22.03	37.48	3	Horizontal	23	1.00	-	36.55	9.37	31.43			
AV	7.29936G	38.27	54.00	-15.73	23.83	3	Horizontal	23	1.00	-	36.50	9.37	31.43			

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX

2457MHz_TX

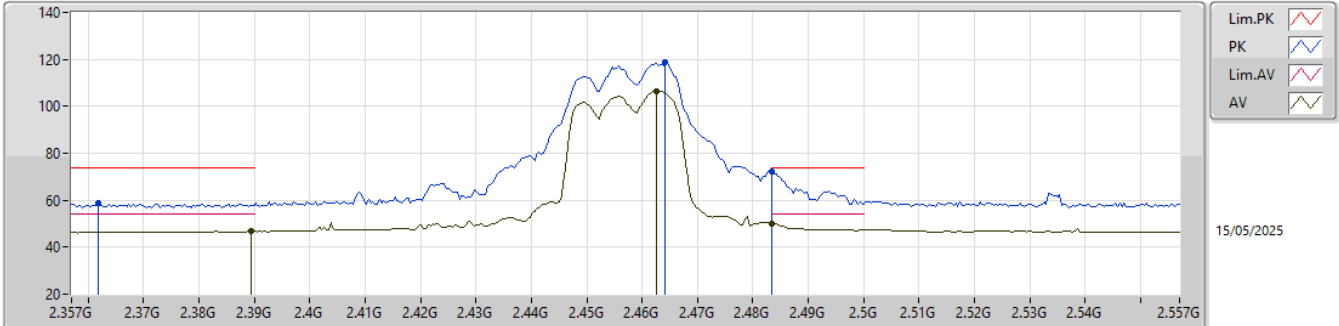


EUT_Z_4TX
Setting 18.5
02-D-C-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3618G	58.70	74.00	-15.30	26.34	3	Vertical	304	1.00	-	28.32	4.04	-			
AV	2.3894G	46.72	54.00	-7.28	14.16	3	Vertical	304	1.00	-	28.50	4.06	-			
PK	2.4642G	119.01	Inf	-Inf	86.49	3	Vertical	304	1.00	-	28.40	4.12	-			
AV	2.4626G	106.50	Inf	-Inf	73.98	3	Vertical	304	1.00	-	28.40	4.12	-			
PK	2.4835G	72.26	74.00	-1.74	39.69	3	Vertical	304	1.00	-	28.44	4.13	-			
AV	2.4835G	50.20	54.00	-3.80	17.63	3	Vertical	304	1.00	-	28.44	4.13	-			

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX

2457MHz_TX

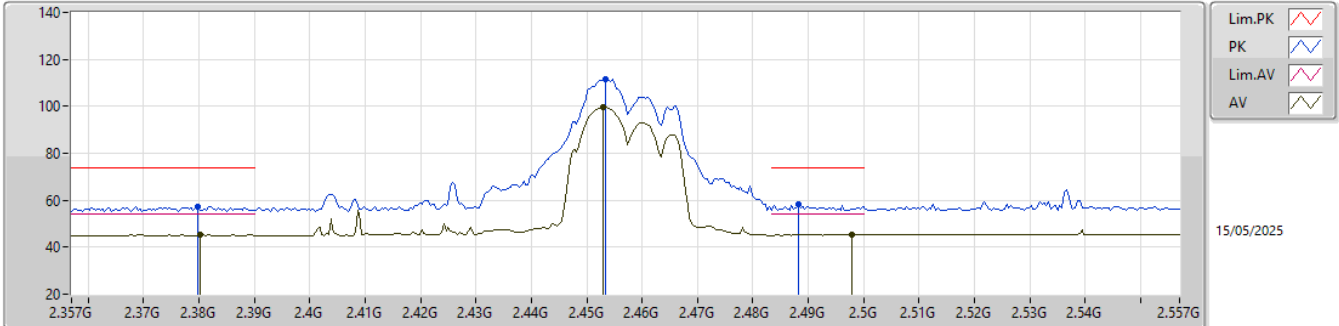


EUT_Z_4TX
Setting 18.5
02-D-C-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3798G	57.29	74.00	-16.71	24.73	3	Horizontal	51	3.00	-	28.50	4.06	-			
AV	2.3802G	45.20	54.00	-8.80	12.64	3	Horizontal	51	3.00	-	28.50	4.06	-			
PK	2.4534G	111.45	Inf	-Inf	78.94	3	Horizontal	51	3.00	-	28.40	4.11	-			
AV	2.453G	99.65	Inf	-Inf	67.14	3	Horizontal	51	3.00	-	28.40	4.11	-			
PK	2.4882G	58.48	74.00	-15.52	25.86	3	Horizontal	51	3.00	-	28.48	4.14	-			
AV	2.4978G	45.24	54.00	-8.76	12.52	3	Horizontal	51	3.00	-	28.58	4.14	-			

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX

2462MHz_TX

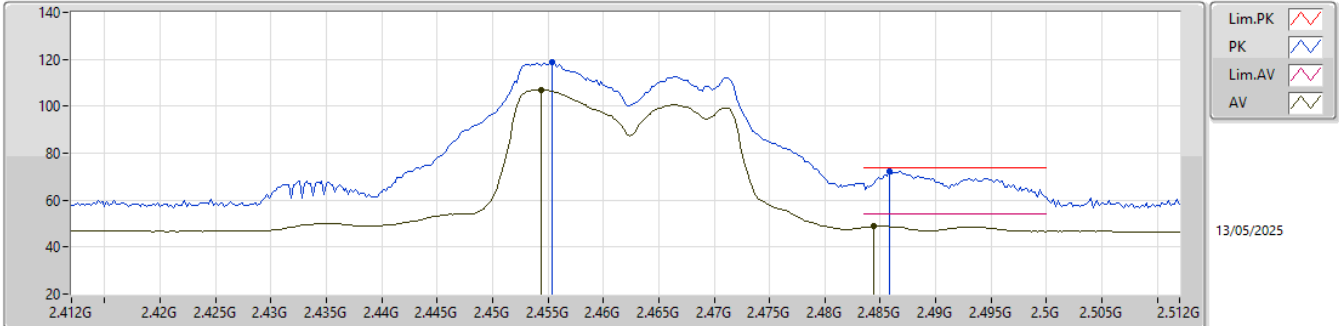


EUT_Z_4TX
Setting 18.5
02-D-E-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.4554G	118.54	Inf	-Inf	86.03	3	Vertical	131	3.00	-	28.40	4.11	-			
AV	2.4544G	107.10	Inf	-Inf	74.59	3	Vertical	131	3.00	-	28.40	4.11	-			
PK	2.4858G	72.29	74.00	-1.71	39.70	3	Vertical	131	3.00	-	28.46	4.13	-			
AV	2.4844G	48.87	54.00	-5.13	16.30	3	Vertical	131	3.00	-	28.44	4.13	-			

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX

2462MHz_TX

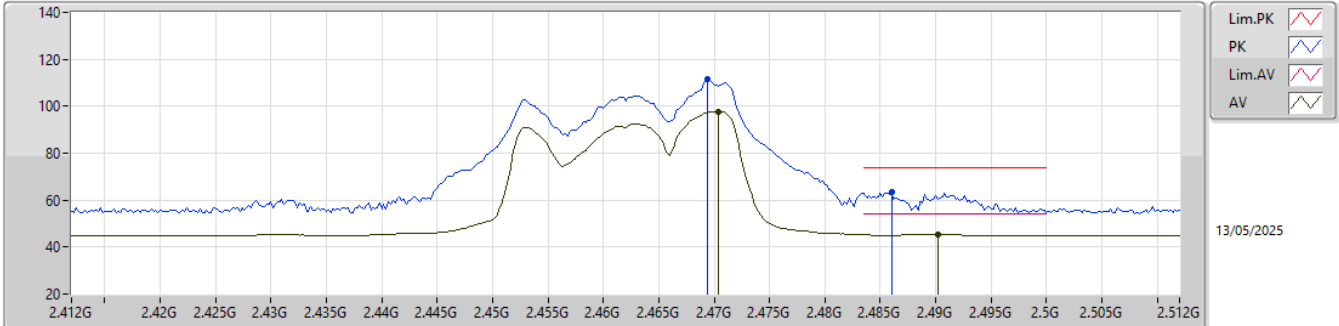


EUT_Z_4TX
Setting 18.5
02-D-E-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.4694G	111.33	Inf	-Inf	78.81	3	Horizontal	129	1.52	-	28.40	4.12	-			
AV	2.4704G	97.66	Inf	-Inf	65.14	3	Horizontal	129	1.52	-	28.40	4.12	-			
PK	2.486G	63.19	74.00	-10.81	30.60	3	Horizontal	129	1.52	-	28.46	4.13	-			
AV	2.4902G	45.44	54.00	-8.56	12.80	3	Horizontal	129	1.52	-	28.50	4.14	-			

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX

2462MHz_TX

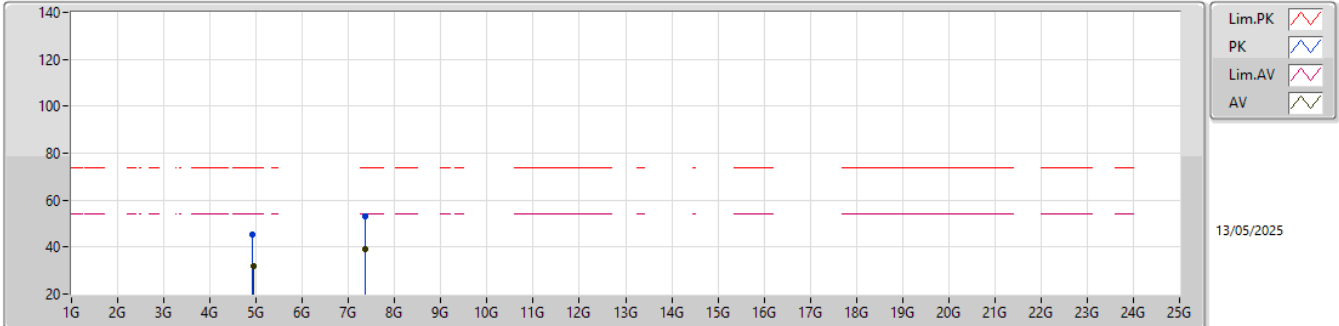


EUT_Z_4TX
Setting 18.5
02-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.9138G	45.56	74.00	-28.44	36.50	3	Vertical	122	1.72	-	33.23	6.83	31.00			
AV	4.939G	32.09	54.00	-21.91	22.97	3	Vertical	122	1.72	-	33.28	6.85	31.01			
PK	7.37166G	53.19	74.00	-20.81	38.61	3	Vertical	281	1.26	-	36.64	9.37	31.43			
AV	7.37454G	38.97	54.00	-15.03	24.38	3	Vertical	281	1.26	-	36.65	9.37	31.43			

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_4TX

2462MHz_TX

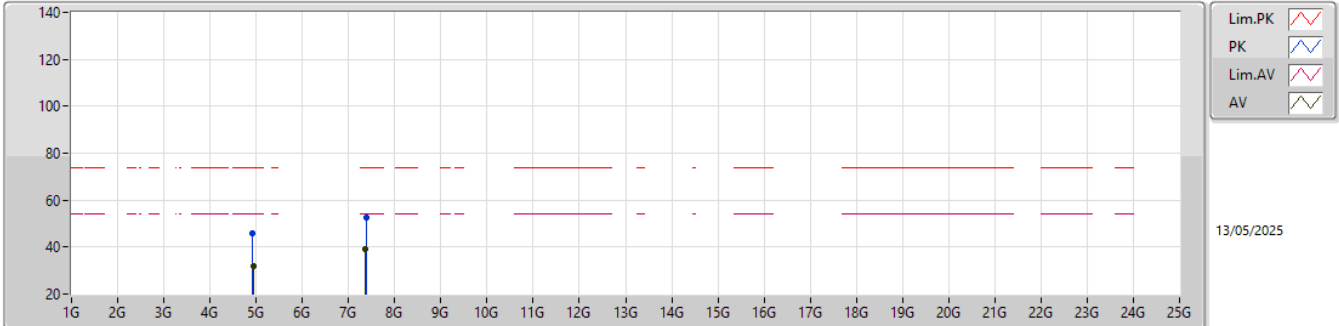


EUT_Z_4TX
Setting 18.5
02-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.91212G	45.75	74.00	-28.25	36.70	3	Horizontal	46	1.37	-	33.22	6.83	31.00				
AV	4.93828G	32.08	54.00	-21.92	22.96	3	Horizontal	46	1.37	-	33.28	6.85	31.01				
PK	7.38474G	52.40	74.00	-21.60	37.79	3	Horizontal	46	1.96	-	36.67	9.37	31.43				
AV	7.3725G	38.88	54.00	-15.12	24.29	3	Horizontal	46	1.96	-	36.65	9.37	31.43				

2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_4TX

2422MHz_TX

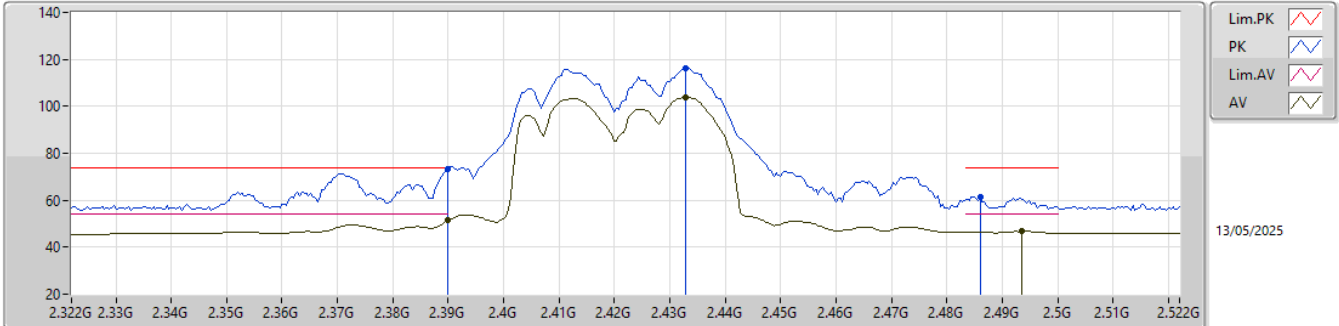


EUT_Z_4TX
Setting 18.5
02-D-E-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.39G	73.22	74.00	-0.78	40.66	3	Vertical	127	2.88	-	28.50	4.06	-			
AV	2.39G	51.38	54.00	-2.62	18.82	3	Vertical	127	2.88	-	28.50	4.06	-			
PK	2.4328G	116.35	Inf	-Inf	83.86	3	Vertical	127	2.88	-	28.40	4.09	-			
AV	2.4328G	104.03	Inf	-Inf	71.54	3	Vertical	127	2.88	-	28.40	4.09	-			
PK	2.486G	61.63	74.00	-12.37	29.04	3	Vertical	127	2.88	-	28.46	4.13	-			
AV	2.4936G	46.80	54.00	-7.20	14.12	3	Vertical	127	2.88	-	28.54	4.14	-			

2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_4TX

2422MHz_TX

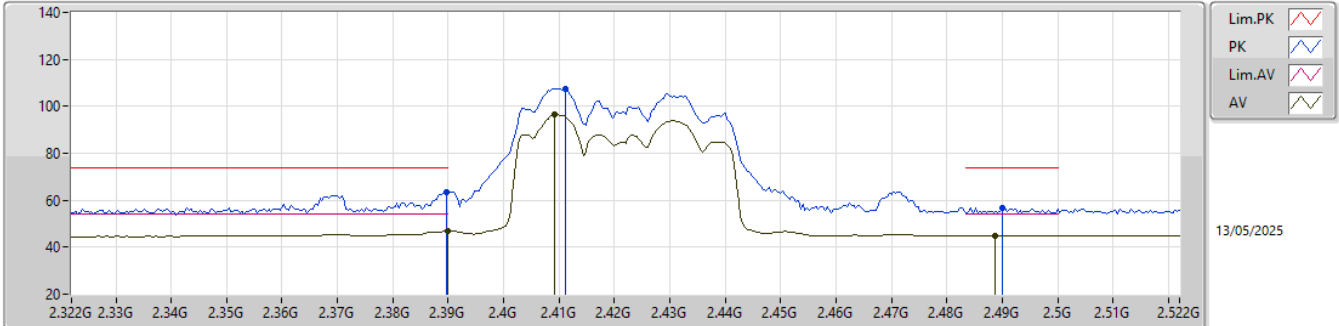


EUT_Z_4TX
Setting 18.5
02-D-E-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3896G	63.37	74.00	-10.63	30.81	3	Horizontal	132	2.54	-	28.50	4.06	-			
AV	2.39G	46.93	54.00	-7.07	14.37	3	Horizontal	132	2.54	-	28.50	4.06	-			
PK	2.4112G	107.60	Inf	-Inf	75.11	3	Horizontal	132	2.54	-	28.41	4.08	-			
AV	2.4092G	96.33	Inf	-Inf	63.85	3	Horizontal	132	2.54	-	28.40	4.08	-			
PK	2.49G	56.88	74.00	-17.12	24.24	3	Horizontal	132	2.54	-	28.50	4.14	-			
AV	2.4888G	44.83	54.00	-9.17	12.20	3	Horizontal	132	2.54	-	28.49	4.14	-			

2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_4TX

2422MHz_TX

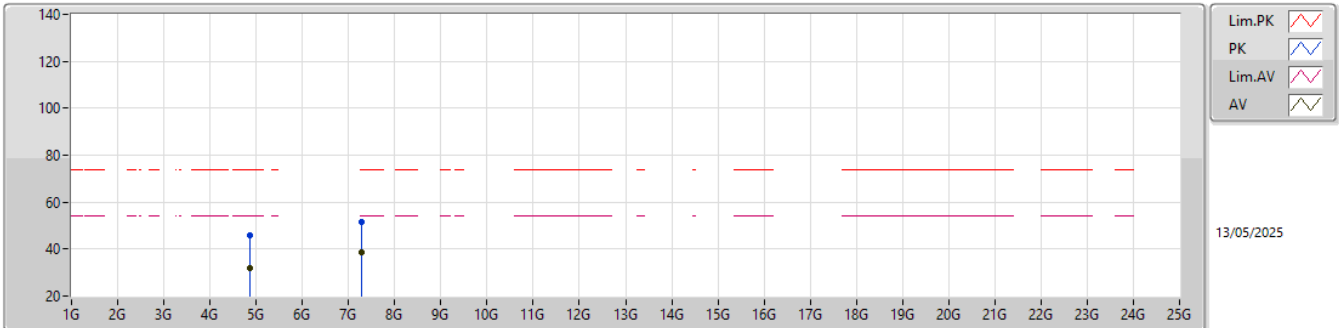


EUT_Z_4TX
Setting 18.5
02-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.86584G	45.63	74.00	-28.37	36.76	3	Vertical	76	2.84	-	33.06	6.81	31.00			
AV	4.86536G	32.10	54.00	-21.90	23.23	3	Vertical	76	2.84	-	33.06	6.81	31.00			
PK	7.29564G	51.66	74.00	-22.34	37.24	3	Vertical	79	2.17	-	36.48	9.37	31.43			
AV	7.28604G	38.41	54.00	-15.59	24.03	3	Vertical	79	2.17	-	36.44	9.37	31.43			

2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_4TX

2422MHz_TX

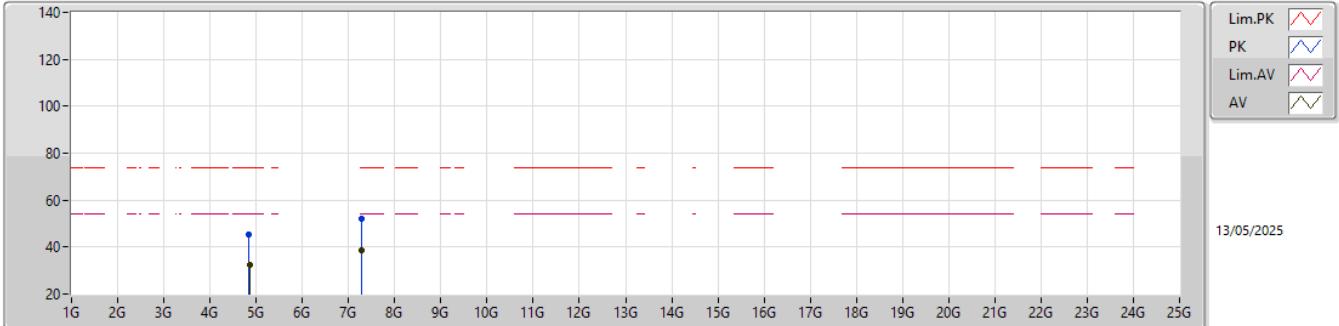


EUT_Z_4TX
Setting 18.5
02-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.83896G	45.49	74.00	-28.51	36.72	3	Horizontal	15	2.39	-	32.98	6.79	31.00			
AV	4.86836G	32.18	54.00	-21.82	23.30	3	Horizontal	15	2.39	-	33.07	6.81	31.00			
PK	7.29336G	51.87	74.00	-22.13	37.46	3	Horizontal	165	2.68	-	36.47	9.37	31.43			
AV	7.2924G	38.52	54.00	-15.48	24.11	3	Horizontal	165	2.68	-	36.47	9.37	31.43			

2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_4TX

2437MHz_TX

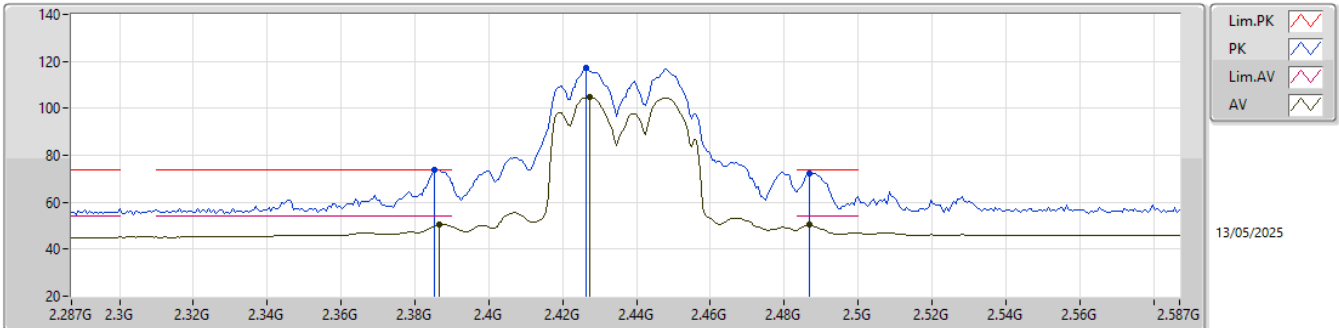


EUT_Z_4TX
Setting 19.5
02-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3854G	73.86	74.00	-0.14	41.30	3	Vertical	124	2.92	-	28.50	4.06	-			
AV	2.3866G	50.46	54.00	-3.54	17.90	3	Vertical	124	2.92	-	28.50	4.06	-			
PK	2.4262G	117.19	Inf	-Inf	84.66	3	Vertical	124	2.92	-	28.44	4.09	-			
AV	2.4274G	104.80	Inf	-Inf	72.28	3	Vertical	124	2.92	-	28.43	4.09	-			
PK	2.4868G	72.31	74.00	-1.69	39.70	3	Vertical	124	2.92	-	28.47	4.14	-			
AV	2.4868G	50.27	54.00	-3.73	17.66	3	Vertical	124	2.92	-	28.47	4.14	-			

2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_4TX

2437MHz_TX

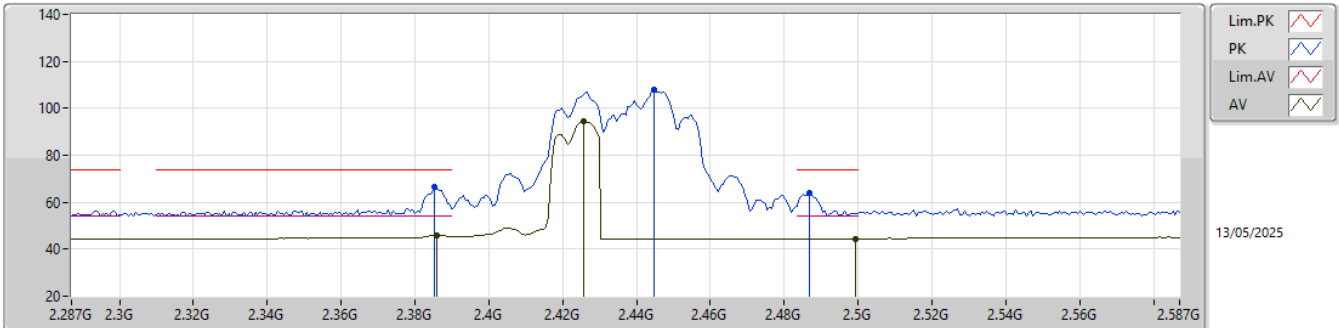


EUT_Z_4TX
Setting 19.5
02-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3854G	66.53	74.00	-7.47	33.97	3	Horizontal	133	2.39	-	28.50	4.06	-			
AV	2.386G	46.04	54.00	-7.96	13.48	3	Horizontal	133	2.39	-	28.50	4.06	-			
PK	2.4448G	108.09	Inf	-Inf	75.59	3	Horizontal	133	2.39	-	28.40	4.10	-			
AV	2.4256G	94.61	Inf	-Inf	62.08	3	Horizontal	133	2.39	-	28.44	4.09	-			
PK	2.4868G	63.77	74.00	-10.23	31.16	3	Horizontal	133	2.39	-	28.47	4.14	-			
AV	2.4994G	44.56	54.00	-9.44	11.83	3	Horizontal	133	2.39	-	28.59	4.14	-			

2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_4TX

2437MHz_TX

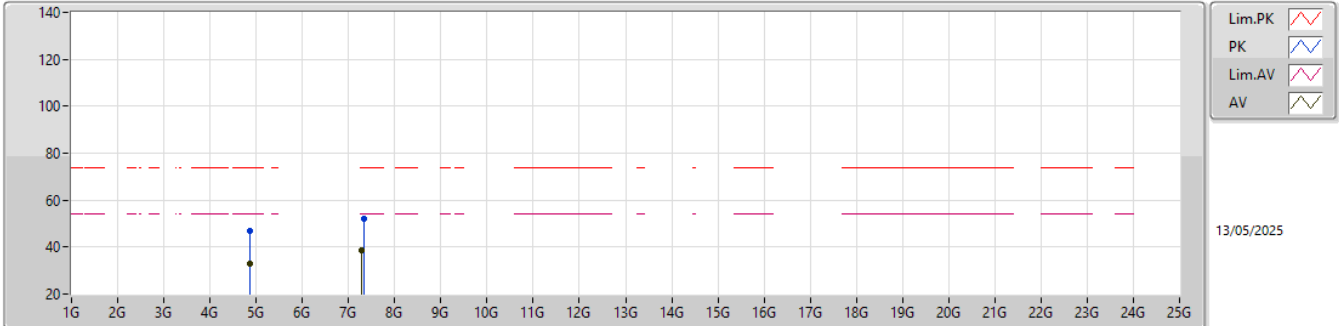


EUT_Z_4TX
Setting 19.5
02-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.86752G	46.84	74.00	-27.16	37.96	3	Vertical	231	1.89	-	33.07	6.81	31.00			
AV	4.8674G	33.08	54.00	-20.92	24.20	3	Vertical	231	1.89	-	33.07	6.81	31.00			
PK	7.3356G	52.08	74.00	-21.92	37.57	3	Vertical	201	1.80	-	36.57	9.37	31.43			
AV	7.29072G	38.63	54.00	-15.37	24.23	3	Vertical	201	1.80	-	36.46	9.37	31.43			

2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_4TX

2437MHz_TX

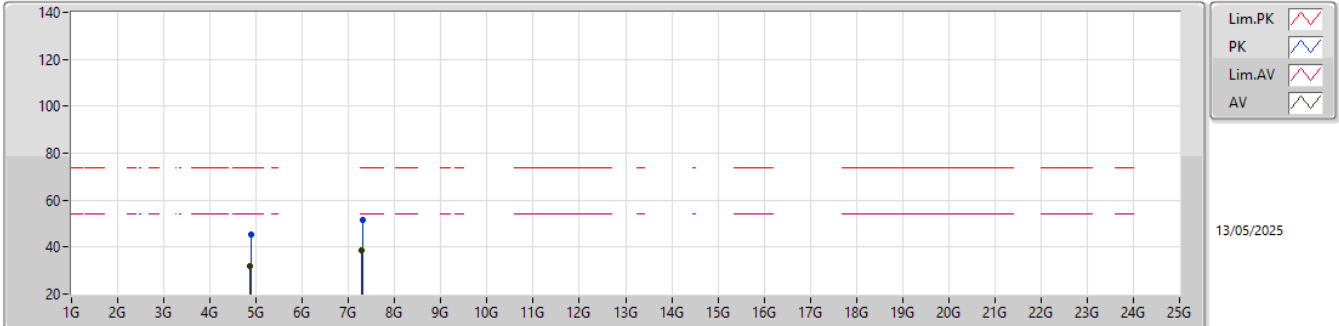


EUT_Z_4TX
Setting 19.5
02-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.90352G	45.38	74.00	-28.62	36.34	3	Horizontal	63	2.08	-	33.21	6.83	31.00			
AV	4.86548G	32.09	54.00	-21.91	23.22	3	Horizontal	63	2.08	-	33.06	6.81	31.00			
PK	7.30428G	51.75	74.00	-22.25	37.30	3	Horizontal	16	1.16	-	36.51	9.37	31.43			
AV	7.29336G	38.59	54.00	-15.41	24.18	3	Horizontal	16	1.16	-	36.47	9.37	31.43			

2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_4TX

2452MHz_TX

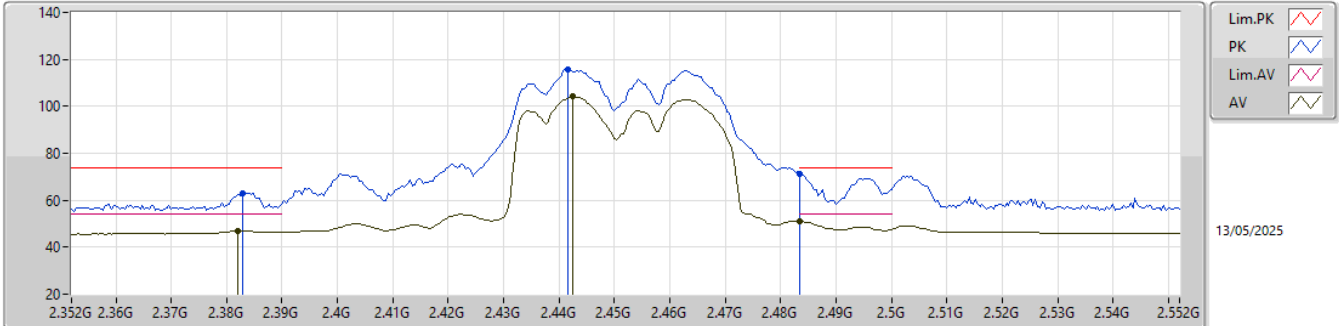


EUT_Z_4TX
Setting 18.5
02-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3828G	63.03	74.00	-10.97	30.47	3	Vertical	126	3.00	-	28.50	4.06	-			
AV	2.382G	46.92	54.00	-7.08	14.36	3	Vertical	126	3.00	-	28.50	4.06	-			
PK	2.4416G	115.93	Inf	-Inf	83.43	3	Vertical	126	3.00	-	28.40	4.10	-			
AV	2.4424G	104.08	Inf	-Inf	71.58	3	Vertical	126	3.00	-	28.40	4.10	-			
PK	2.4835G	71.34	74.00	-2.66	38.77	3	Vertical	126	3.00	-	28.44	4.13	-			
AV	2.4835G	51.04	54.00	-2.96	18.47	3	Vertical	126	3.00	-	28.44	4.13	-			

2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_4TX

2452MHz_TX

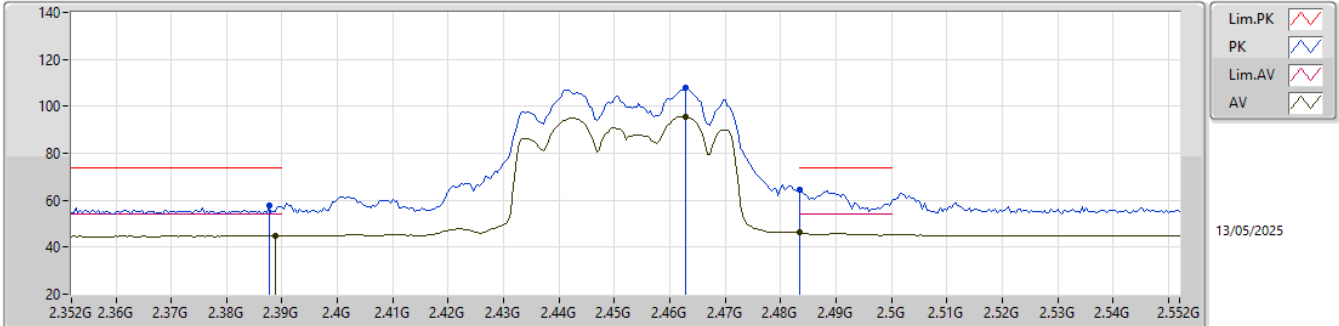


EUT_Z_4TX
Setting 18.5
02-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3876G	57.78	74.00	-16.22	25.22	3	Horizontal	49	2.81	-	28.50	4.06	-			
AV	2.3888G	44.80	54.00	-9.20	12.24	3	Horizontal	49	2.81	-	28.50	4.06	-			
PK	2.4628G	107.86	Inf	-Inf	75.34	3	Horizontal	49	2.81	-	28.40	4.12	-			
AV	2.4628G	95.57	Inf	-Inf	63.05	3	Horizontal	49	2.81	-	28.40	4.12	-			
PK	2.4835G	64.63	74.00	-9.37	32.06	3	Horizontal	49	2.81	-	28.44	4.13	-			
AV	2.4835G	46.36	54.00	-7.64	13.79	3	Horizontal	49	2.81	-	28.44	4.13	-			

2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_4TX

2452MHz_TX

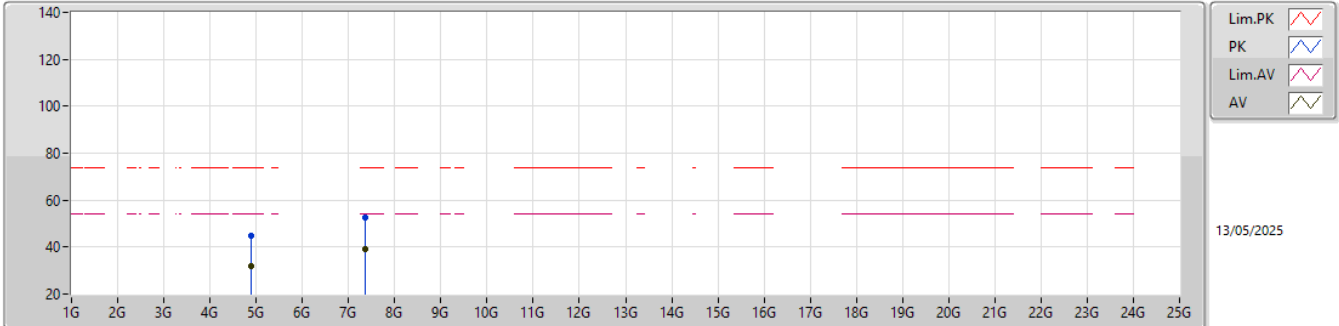


EUT_Z_4TX
Setting 18.5
02-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.8989G	45.02	74.00	-28.98	36.00	3	Vertical	333	2.89	-	33.20	6.82	31.00			
AV	4.90172G	31.97	54.00	-22.03	22.94	3	Vertical	333	2.89	-	33.20	6.83	31.00			
PK	7.36206G	52.82	74.00	-21.18	38.26	3	Vertical	323	2.58	-	36.62	9.37	31.43			
AV	7.36392G	38.98	54.00	-15.02	24.41	3	Vertical	323	2.58	-	36.63	9.37	31.43			

2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_4TX

2452MHz_TX

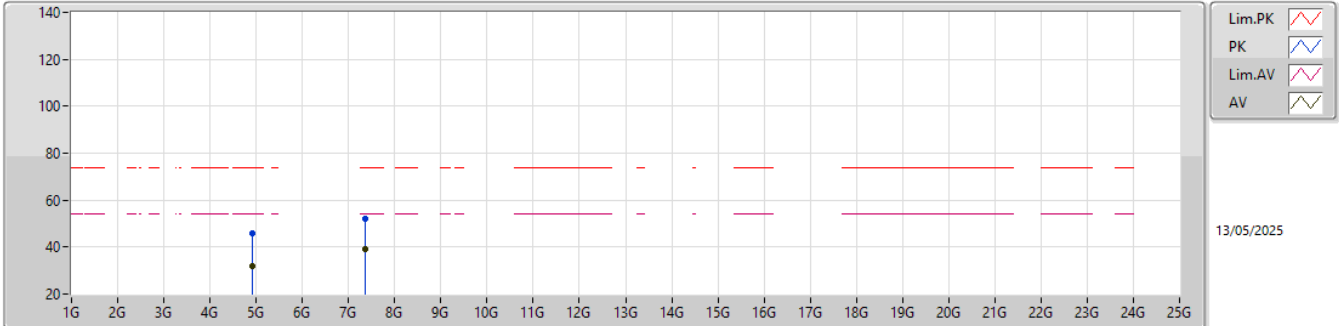

EUT_Z_4TX
Setting 18.5
02-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.91396G	45.91	74.00	-28.09	36.85	3	Horizontal	167	2.50	-	33.23	6.83	31.00			
AV	4.91888G	32.07	54.00	-21.93	23.00	3	Horizontal	167	2.50	-	33.24	6.84	31.01			
PK	7.36638G	51.98	74.00	-22.02	37.41	3	Horizontal	316	1.54	-	36.63	9.37	31.43			
AV	7.36896G	39.02	54.00	-14.98	24.44	3	Horizontal	316	1.54	-	36.64	9.37	31.43			




Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-
802.11be EHT40-BF_Nss1,(MCS0)_4TX	Pass	AV	2.389G	53.83	54.00	-0.17	3	Vertical	92	2.92	-

2.4-2.4835GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

2412MHz_TX

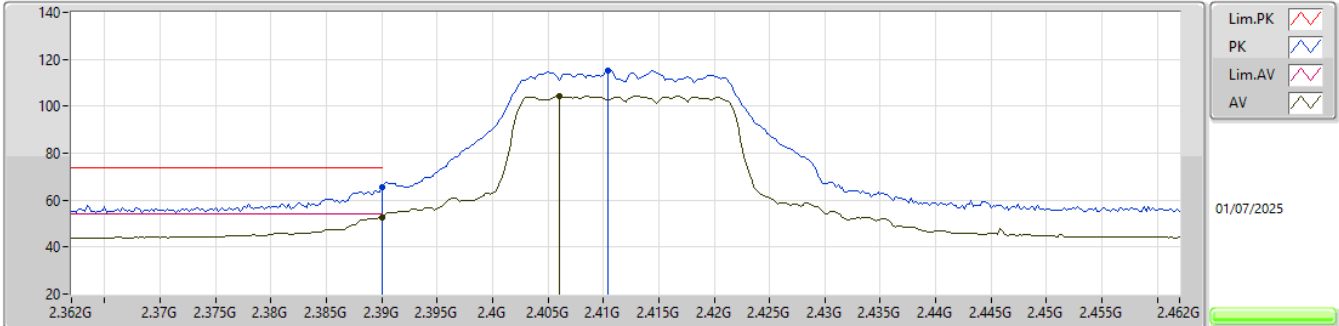


EUT_Z_4TX
Setting 45
03-E-E-3-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	2.39G	65.47	74.00	-8.53	66.50	3	Vertical	95.7	2.72	-	28.40	5.43	34.86				
AV	2.39G	52.55	54.00	-1.45	53.58	3	Vertical	95.7	2.72	-	28.40	5.43	34.86				
PK	2.4104G	115.42	Inf	-Inf	116.54	3	Vertical	95.7	2.72	-	28.30	5.45	34.87				
AV	2.406G	104.34	Inf	-Inf	105.46	3	Vertical	95.7	2.72	-	28.30	5.45	34.87				

2.4-2.4835GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

2412MHz_TX

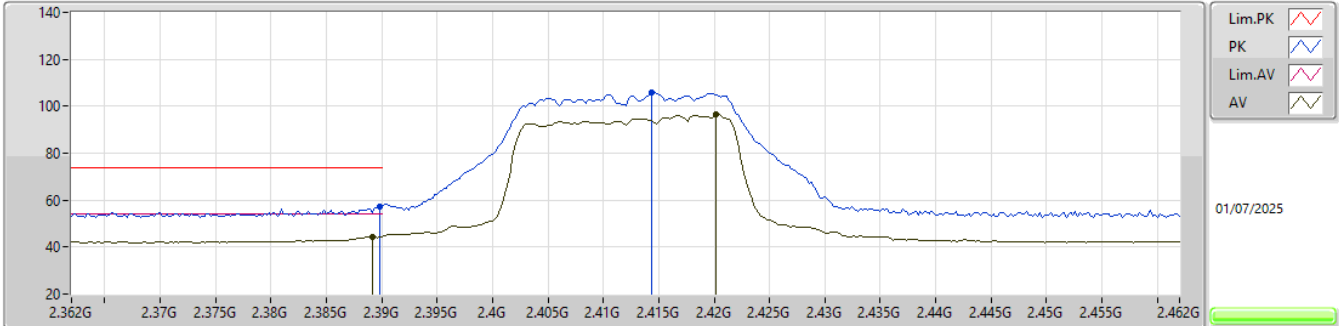


EUT_Z_4TX
Setting 45
03-E-E-3-13

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	2.3898G	57.19	74.00	-16.81	58.22	3	Horizontal	204	1.58	-	28.40	5.43	34.86				
AV	2.3892G	44.41	54.00	-9.59	45.45	3	Horizontal	204	1.58	-	28.39	5.43	34.86				
PK	2.4144G	105.85	Inf	-Inf	106.92	3	Horizontal	204	1.58	-	28.34	5.46	34.87				
AV	2.4202G	96.31	Inf	-Inf	97.33	3	Horizontal	204	1.58	-	28.40	5.46	34.88				

2.4-2.4835GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

2412MHz_TX

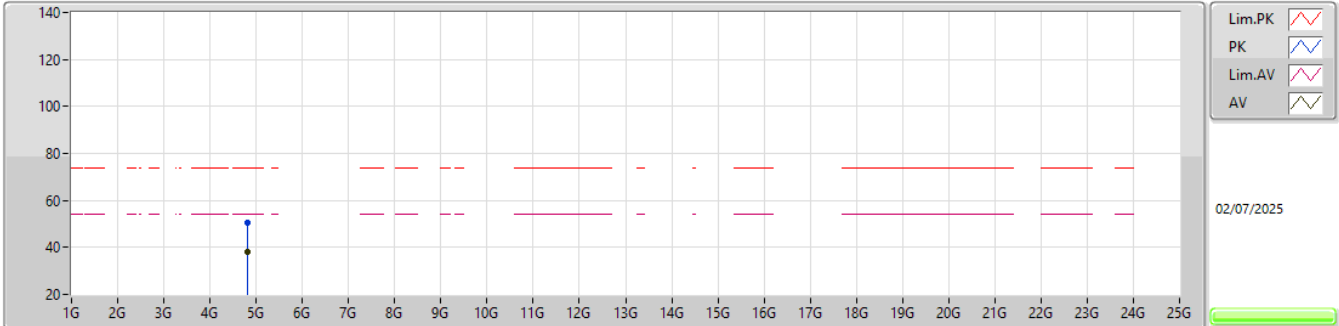


EUT_Z_4TX
Setting 45
03-E-J-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	4.81772G	50.41	74.00	-23.59	44.68	3	Vertical	220.4	2.70	-	33.44	7.20	34.91			
AV	4.8174G	37.91	54.00	-16.09	32.19	3	Vertical	220.4	2.70	-	33.43	7.20	34.91			

2.4-2.4835GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

2412MHz_TX

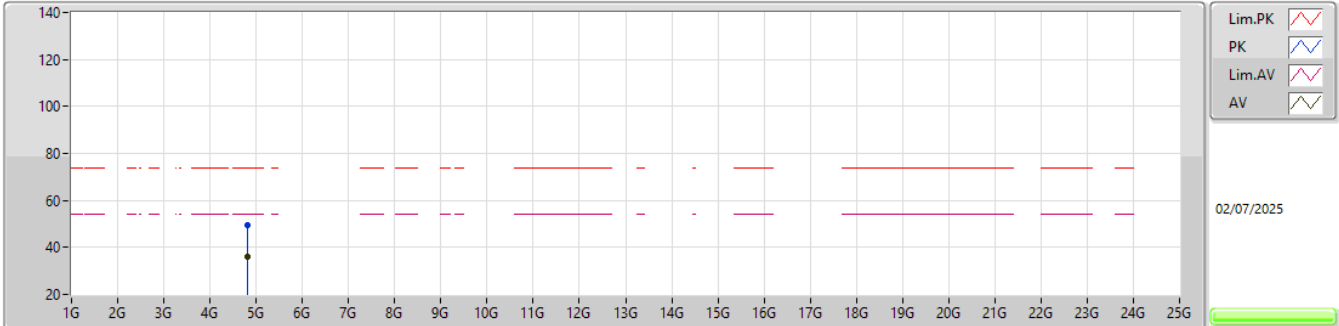


EUT_Z_4TX
Setting 45
03-E-J-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	4.8178G	49.53	74.00	-24.47	43.80	3	Horizontal	153	1.44	-	33.44	7.20	34.91			
AV	4.81774G	36.02	54.00	-17.98	30.29	3	Horizontal	153	1.44	-	33.44	7.20	34.91			

2.4-2.4835GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

2417MHz_TX

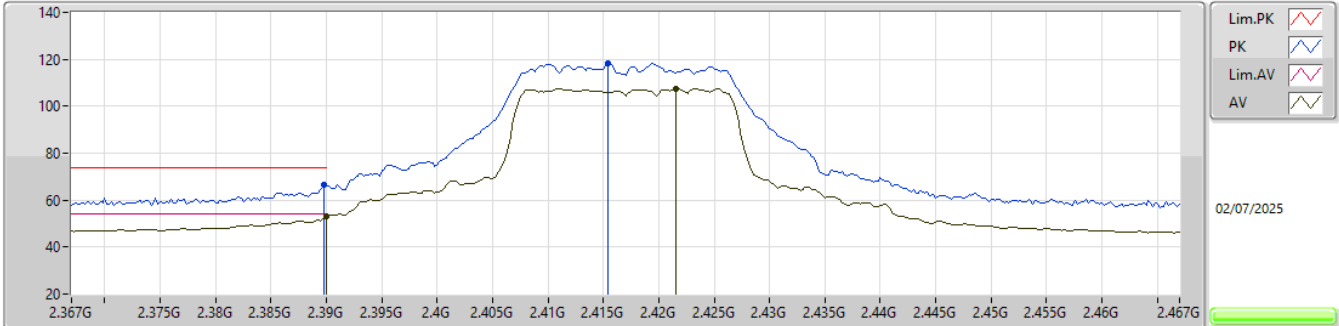


EUT_Z_4TX
Setting 55
03-E-E-3-13

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	2.3898G	66.50	74.00	-7.50	67.53	3	Vertical	90	2.77	-	28.40	5.43	34.86			
AV	2.39G	53.10	54.00	-0.90	54.13	3	Vertical	90	2.77	-	28.40	5.43	34.86			
PK	2.4154G	118.22	Inf	-Inf	119.28	3	Vertical	90	2.77	-	28.35	5.46	34.87			
AV	2.4216G	107.53	Inf	-Inf	108.54	3	Vertical	90	2.77	-	28.40	5.47	34.88			

2.4-2.4835GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

2417MHz_TX

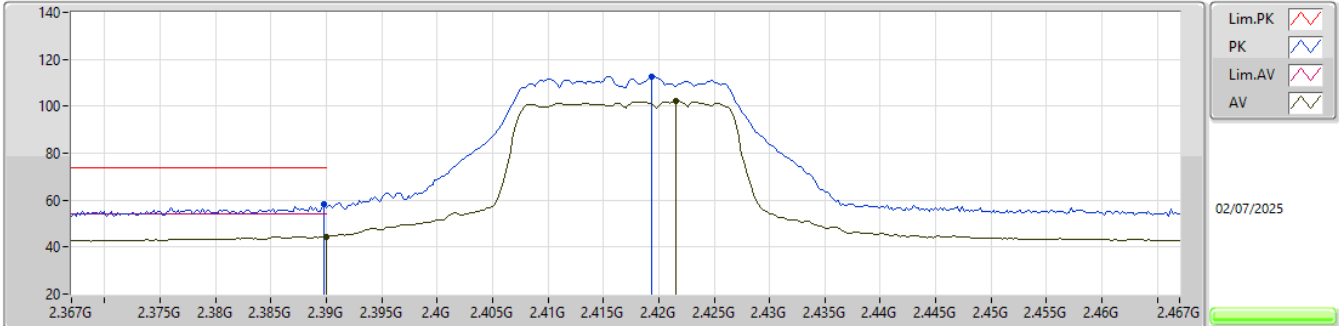


EUT_Z_4TX
Setting 55
03-E-E-3-13

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	2.3898G	58.08	74.00	-15.92	59.11	3	Horizontal	81.3	2.56	-	28.40	5.43	34.86			
AV	2.39G	44.49	54.00	-9.51	45.52	3	Horizontal	81.3	2.56	-	28.40	5.43	34.86			
PK	2.4194G	112.71	Inf	-Inf	113.74	3	Horizontal	81.3	2.56	-	28.39	5.46	34.88			
AV	2.4216G	102.14	Inf	-Inf	103.15	3	Horizontal	81.3	2.56	-	28.40	5.47	34.88			

2.4-2.4835GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

2437MHz_TX

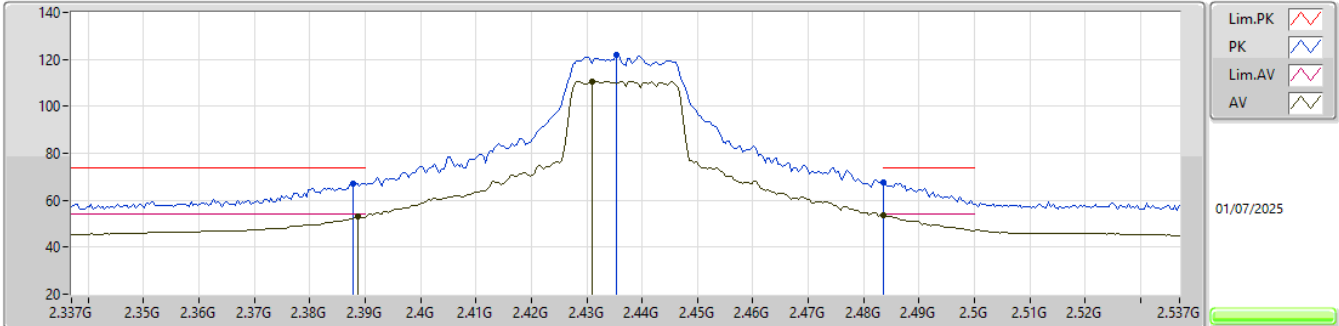


EUT_Z_4TX
Setting 61
03-E-E-3-13

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3878G	67.23	74.00	-6.77	68.29	3	Vertical	95.6	2.58	-	28.38	5.42	34.86			
AV	2.3886G	53.12	54.00	-0.88	54.16	3	Vertical	95.6	2.58	-	28.39	5.43	34.86			
PK	2.4354G	121.98	Inf	-Inf	122.99	3	Vertical	95.6	2.58	-	28.40	5.48	34.89			
AV	2.431G	110.74	Inf	-Inf	111.74	3	Vertical	95.6	2.58	-	28.40	5.48	34.88			
PK	2.4835G	67.49	74.00	-6.51	68.46	3	Vertical	95.6	2.58	-	28.40	5.54	34.91			
AV	2.4835G	53.75	54.00	-0.25	54.72	3	Vertical	95.6	2.58	-	28.40	5.54	34.91			

2.4-2.4835GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

2437MHz_TX

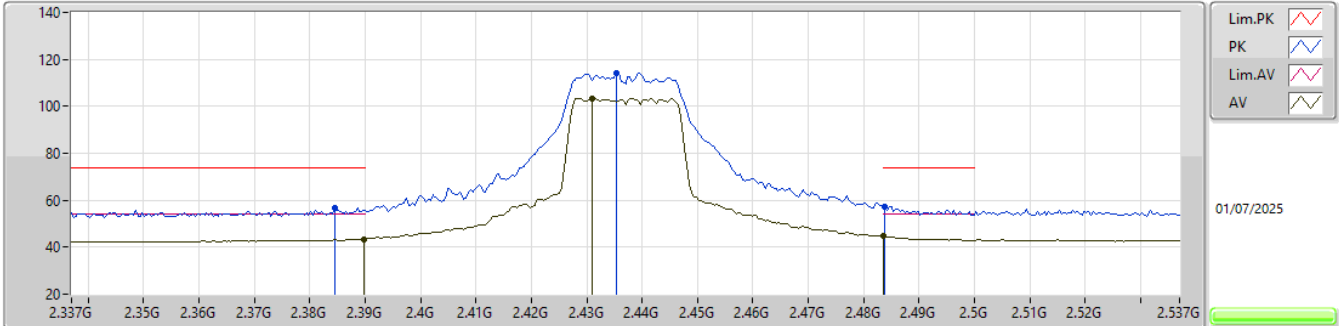


EUT_Z_4TX
Setting 61
03-E-E-3-13

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3846G	56.50	74.00	-17.50	57.59	3	Horizontal	208.7	2.69	-	28.35	5.42	34.86			
AV	2.3898G	43.48	54.00	-10.52	44.51	3	Horizontal	208.7	2.69	-	28.40	5.43	34.86			
PK	2.4354G	114.10	Inf	-Inf	115.11	3	Horizontal	208.7	2.69	-	28.40	5.48	34.89			
AV	2.431G	103.50	Inf	-Inf	104.50	3	Horizontal	208.7	2.69	-	28.40	5.48	34.88			
PK	2.4838G	57.43	74.00	-16.57	58.40	3	Horizontal	208.7	2.69	-	28.40	5.54	34.91			
AV	2.4835G	44.78	54.00	-9.22	45.75	3	Horizontal	208.7	2.69	-	28.40	5.54	34.91			

2.4-2.4835GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

2437MHz_TX

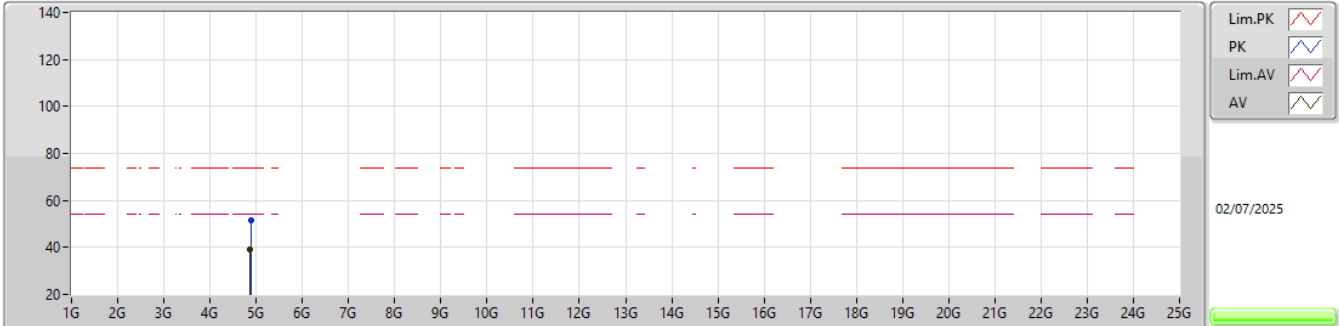


EUT_Z_4TX
Setting 61
03-E-J-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	4.8782G	51.81	74.00	-22.19	46.00	3	Vertical	199.5	2.52	-	33.56	7.18	34.93			
AV	4.869G	39.05	54.00	-14.95	33.24	3	Vertical	199.5	2.52	-	33.54	7.19	34.92			

2.4-2.4835GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

2437MHz_TX

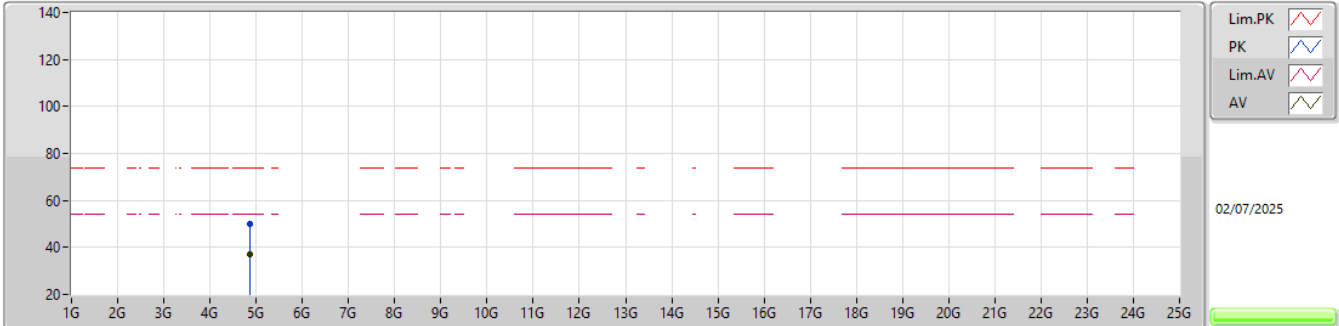


EUT_Z_4TX
Setting 61
03-E-J-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	4.87628G	50.19	74.00	-23.81	44.39	3	Horizontal	8.6	1.83	-	33.55	7.18	34.93			
AV	4.86828G	36.87	54.00	-17.13	31.06	3	Horizontal	8.6	1.83	-	33.54	7.19	34.92			

2.4-2.4835GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

2457MHz_TX

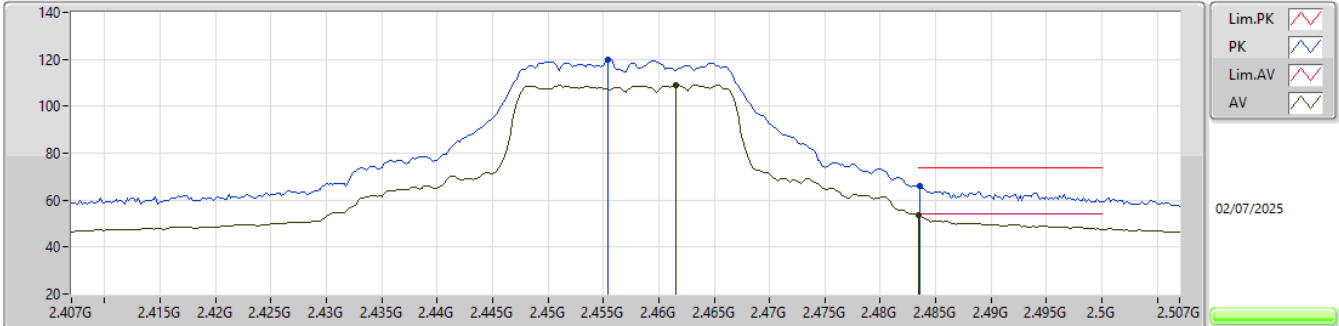


EUT_Z_4TX
Setting 56
03-E-E-3-13

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.4554G	119.63	Inf	-Inf	120.72	3	Vertical	329.1	2.80	-	28.30	5.51	34.90			
AV	2.4616G	108.95	Inf	-Inf	110.02	3	Vertical	329.1	2.80	-	28.32	5.51	34.90			
PK	2.4836G	66.00	74.00	-8.00	66.97	3	Vertical	329.1	2.80	-	28.40	5.54	34.91			
AV	2.4835G	53.55	54.00	-0.45	54.52	3	Vertical	329.1	2.80	-	28.40	5.54	34.91			

2.4-2.4835GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

2457MHz_TX

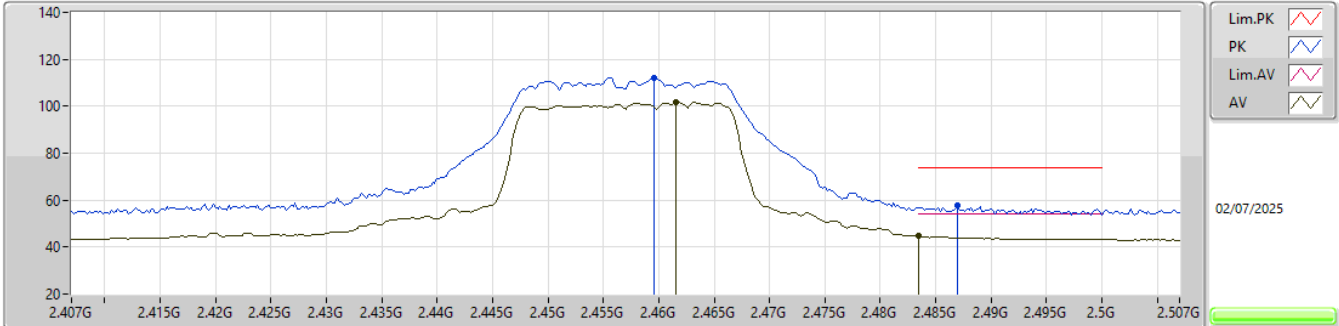


EUT_Z_4TX
Setting 56
03-E-E-3-13

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	2.4596G	112.11	Inf	-Inf	113.20	3	Horizontal	80.2	2.56	-	28.30	5.51	34.90			
AV	2.4616G	101.59	Inf	-Inf	102.66	3	Horizontal	80.2	2.56	-	28.32	5.51	34.90			
PK	2.487G	57.60	74.00	-16.40	58.57	3	Horizontal	80.2	2.56	-	28.40	5.54	34.91			
AV	2.4835G	44.82	54.00	-9.18	45.79	3	Horizontal	80.2	2.56	-	28.40	5.54	34.91			

2.4-2.4835GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

2462MHz_TX

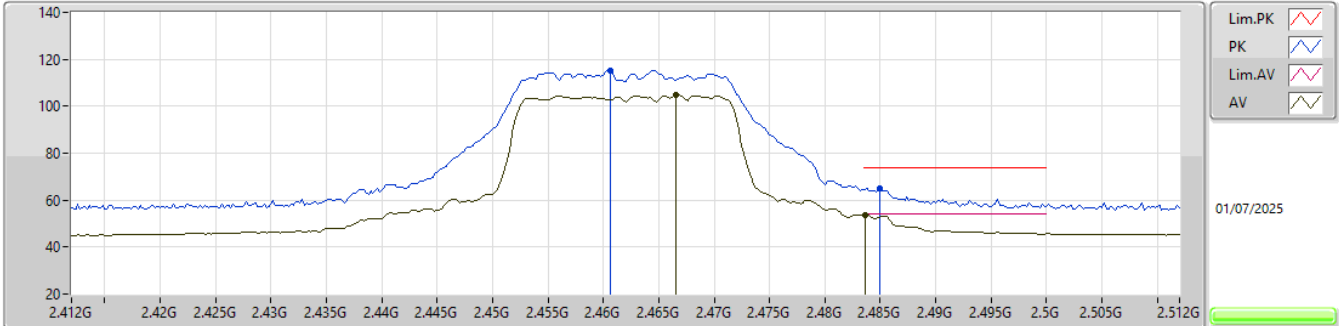


EUT_Z_4TX
Setting 46
03-E-E-3-13

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	2.4606G	115.21	Inf	-Inf	116.29	3	Vertical	56.1	2.77	-	28.31	5.51	34.90			
AV	2.4666G	104.60	Inf	-Inf	105.61	3	Vertical	56.1	2.77	-	28.37	5.52	34.90			
PK	2.485G	65.00	74.00	-9.00	65.97	3	Vertical	56.1	2.77	-	28.40	5.54	34.91			
AV	2.4836G	53.79	54.00	-0.21	54.76	3	Vertical	56.1	2.77	-	28.40	5.54	34.91			

2.4-2.4835GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

2462MHz_TX

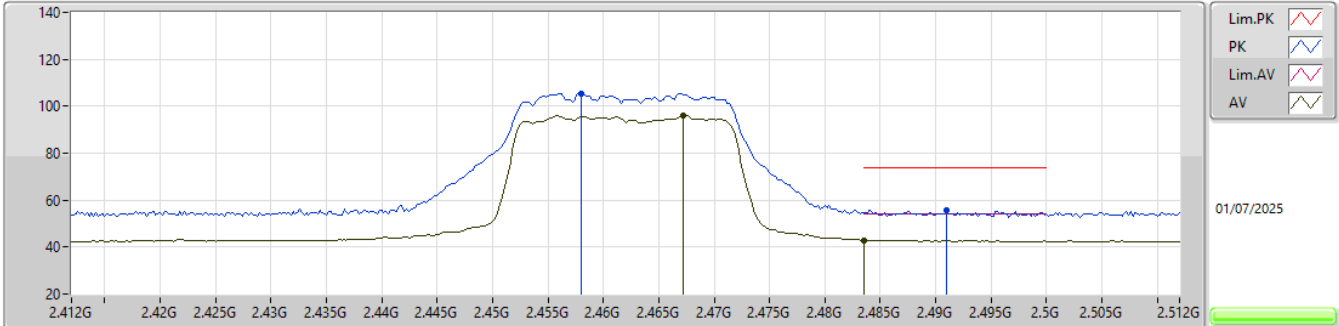


EUT_Z_4TX
Setting 46
03-E-E-3-13

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	2.458G	105.57	Inf	-Inf	106.66	3	Horizontal	1.7	1.88	-	28.30	5.51	34.90			
AV	2.4672G	95.93	Inf	-Inf	96.94	3	Horizontal	1.7	1.88	-	28.37	5.52	34.90			
PK	2.491G	55.59	74.00	-18.41	56.55	3	Horizontal	1.7	1.88	-	28.41	5.55	34.92			
AV	2.4835G	42.98	54.00	-11.02	43.95	3	Horizontal	1.7	1.88	-	28.40	5.54	34.91			

2.4-2.4835GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

2462MHz_TX

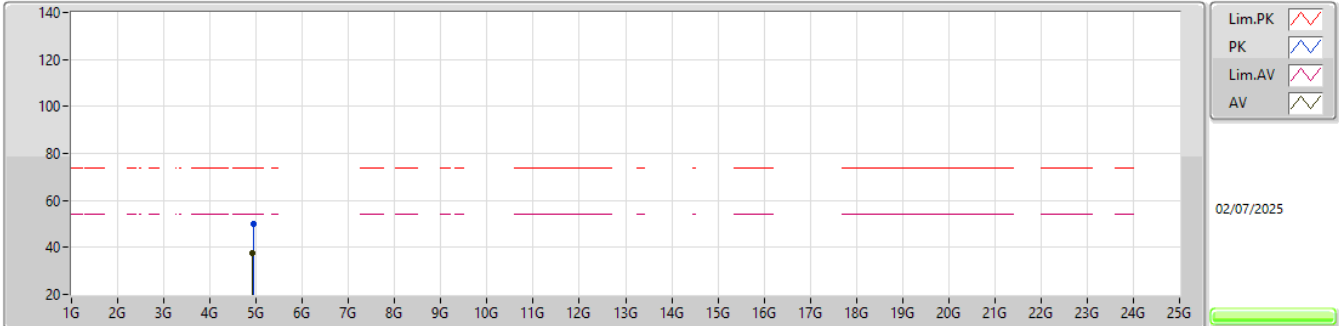


EUT_Z_4TX
Setting 46
03-E-J-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	4.93164G	49.86	74.00	-24.14	44.04	3	Vertical	313	1.11	-	33.60	7.16	34.94			
AV	4.91628G	37.48	54.00	-16.52	31.65	3	Vertical	313	1.11	-	33.60	7.17	34.94			

2.4-2.4835GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

2462MHz_TX

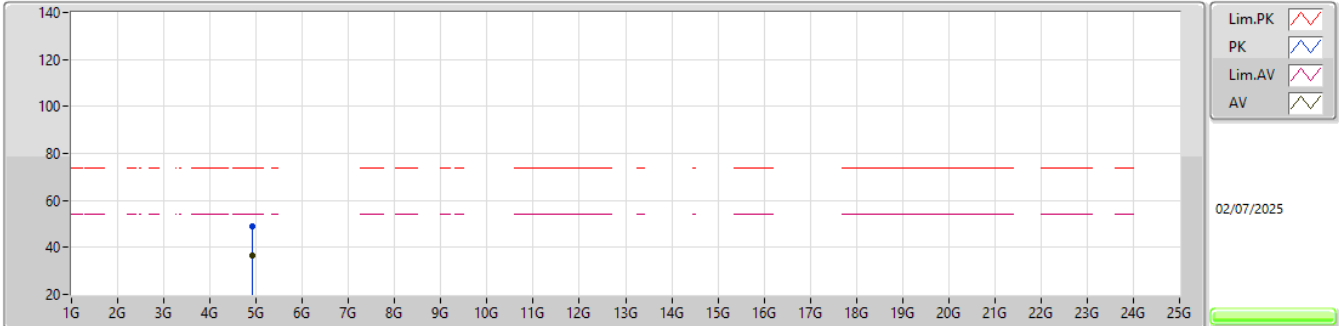


EUT_Z_4TX
Setting 46
03-E-J-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	4.9146G	48.94	74.00	-25.06	43.11	3	Horizontal	63	1.52	-	33.60	7.17	34.94			
AV	4.915G	36.65	54.00	-17.35	30.82	3	Horizontal	63	1.52	-	33.60	7.17	34.94			

2.4-2.4835GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

2422MHz_TX

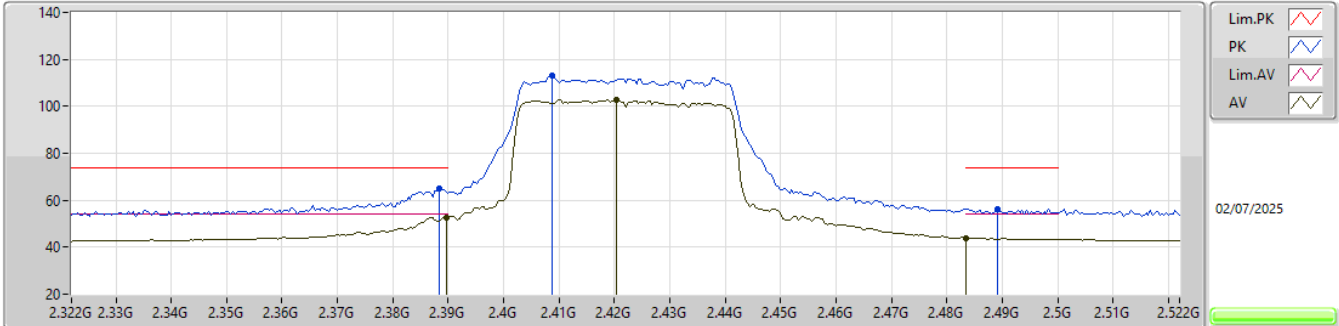


EUT_Z_4TX
Setting 47
03-E-J-5-13

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3884G	64.77	74.00	-9.23	65.83	3	Vertical	92	2.62	-	28.38	5.42	34.86			
AV	2.3896G	52.59	54.00	-1.41	53.62	3	Vertical	92	2.62	-	28.40	5.43	34.86			
PK	2.4088G	113.28	Inf	-Inf	114.40	3	Vertical	92	2.62	-	28.30	5.45	34.87			
AV	2.4204G	102.85	Inf	-Inf	103.87	3	Vertical	92	2.62	-	28.40	5.46	34.88			
PK	2.4892G	56.42	74.00	-17.58	57.38	3	Vertical	92	2.62	-	28.40	5.55	34.91			
AV	2.4835G	43.79	54.00	-10.21	44.76	3	Vertical	92	2.62	-	28.40	5.54	34.91			

2.4-2.4835GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

2422MHz_TX

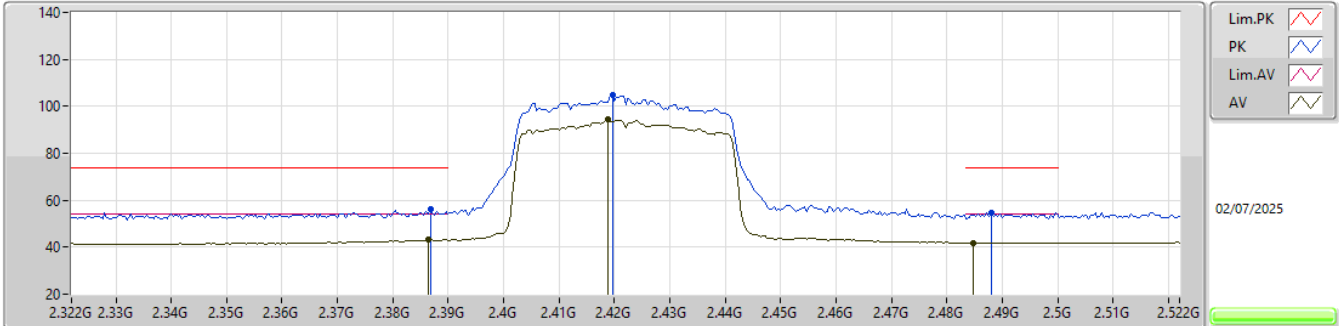


EUT_Z_4TX
Setting 47
03-E-J-5-13

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3868G	56.07	74.00	-17.93	57.14	3	Horizontal	124	1.80	-	28.37	5.42	34.86			
AV	2.3864G	43.24	54.00	-10.76	44.32	3	Horizontal	124	1.80	-	28.36	5.42	34.86			
PK	2.4196G	104.72	Inf	-Inf	105.74	3	Horizontal	124	1.80	-	28.40	5.46	34.88			
AV	2.4188G	94.27	Inf	-Inf	95.30	3	Horizontal	124	1.80	-	28.39	5.46	34.88			
PK	2.488G	54.64	74.00	-19.36	55.60	3	Horizontal	124	1.80	-	28.40	5.55	34.91			
AV	2.4848G	41.86	54.00	-12.14	42.83	3	Horizontal	124	1.80	-	28.40	5.54	34.91			

2.4-2.4835GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

2422MHz_TX

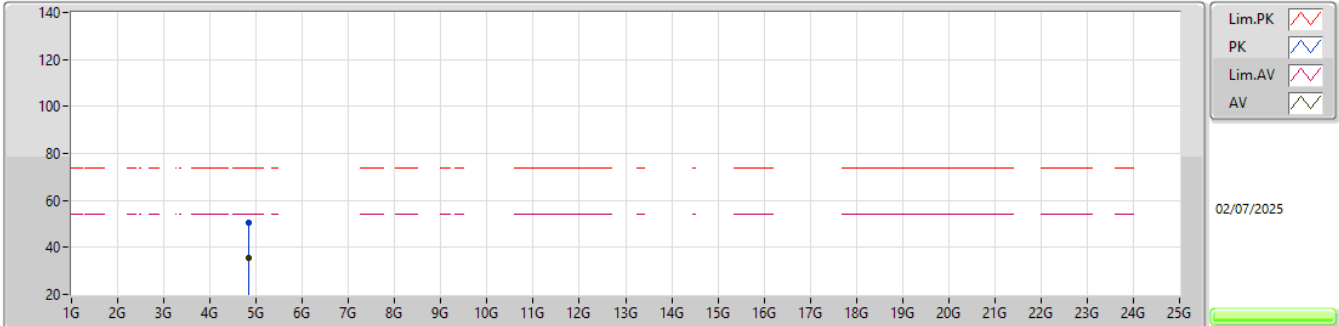


EUT_Z_4TX
Setting 47
03-E-J-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	4.83756G	50.40	74.00	-23.60	44.63	3	Vertical	197.7	2.39	-	33.48	7.20	34.91			
AV	4.8432G	35.32	54.00	-18.68	29.56	3	Vertical	197.7	2.39	-	33.49	7.19	34.92			

2.4-2.4835GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

2422MHz_TX

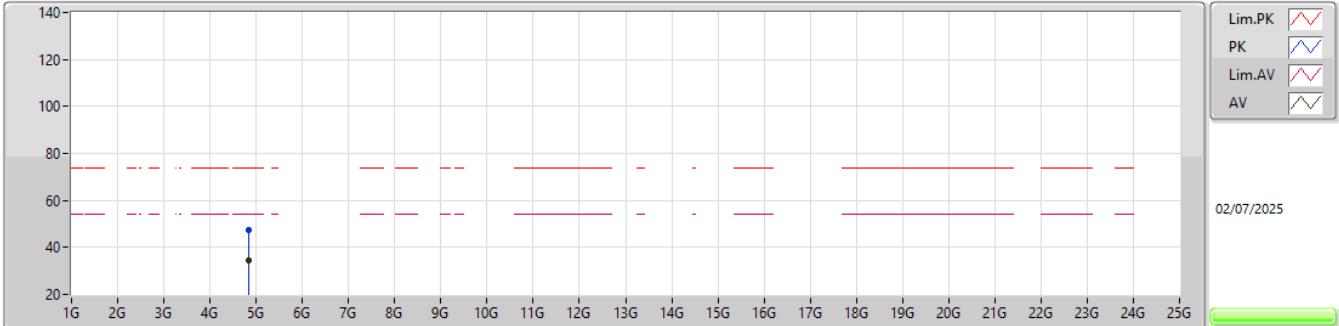


EUT_Z_4TX
Setting 47
03-E-J-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.8478G	47.49	74.00	-26.51	41.72	3	Horizontal	174.2	2.10	-	33.50	7.19	34.92			
AV	4.83456G	34.28	54.00	-19.72	28.52	3	Horizontal	174.2	2.10	-	33.47	7.20	34.91			

2.4-2.4835GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

2427MHz_TX

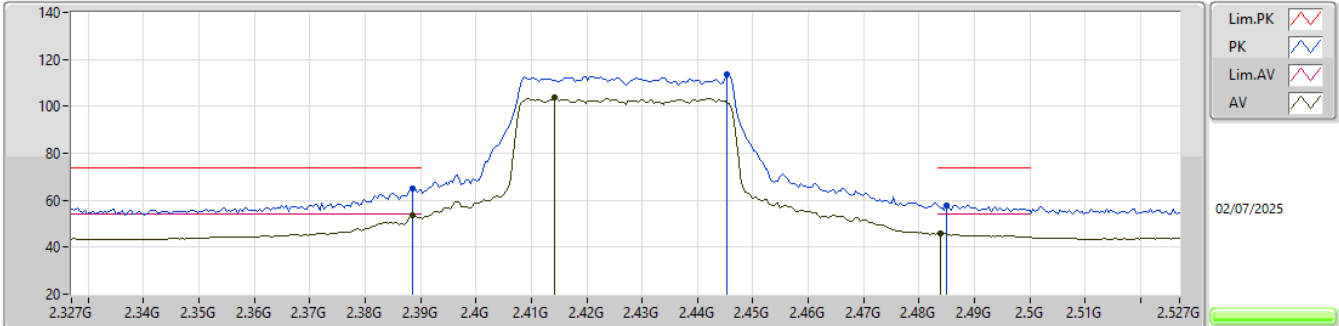


EUT_Z_4TX
Setting 50
03-E-J-5-13

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3886G	65.16	74.00	-8.84	66.20	3	Vertical	93	2.58	-	28.39	5.43	34.86
AV	2.3886G	53.57	54.00	-0.43	54.61	3	Vertical	93	2.58	-	28.39	5.43	34.86
PK	2.4454G	113.76	Inf	-Inf	114.81	3	Vertical	93	2.58	-	28.35	5.49	34.89
AV	2.4142G	103.54	Inf	-Inf	104.61	3	Vertical	93	2.58	-	28.34	5.46	34.87
PK	2.485G	57.96	74.00	-16.04	58.93	3	Vertical	93	2.58	-	28.40	5.54	34.91
AV	2.4838G	45.92	54.00	-8.08	46.89	3	Vertical	93	2.58	-	28.40	5.54	34.91

2.4-2.4835GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

2427MHz_TX

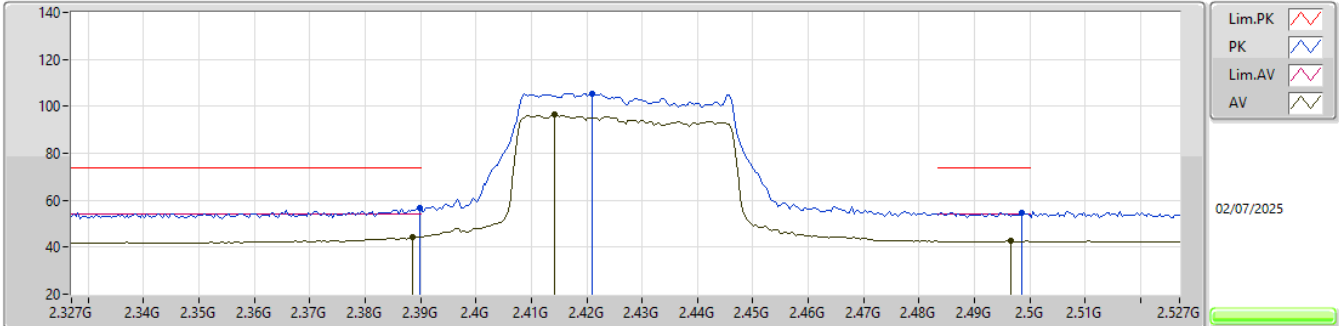


EUT_Z_4TX
Setting 50
03-E-J-5-13

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3898G	56.61	74.00	-17.39	57.64	3	Horizontal	-0	2.29	-	28.40	5.43	34.86			
AV	2.3886G	44.53	54.00	-9.47	45.57	3	Horizontal	-0	2.29	-	28.39	5.43	34.86			
PK	2.421G	105.60	Inf	-Inf	106.61	3	Horizontal	-0	2.29	-	28.40	5.47	34.88			
AV	2.4142G	96.72	Inf	-Inf	97.79	3	Horizontal	-0	2.29	-	28.34	5.46	34.87			
PK	2.4986G	54.84	74.00	-19.16	55.71	3	Horizontal	-0	2.29	-	28.49	5.56	34.92			
AV	2.4966G	42.63	54.00	-11.37	43.52	3	Horizontal	-0	2.29	-	28.47	5.56	34.92			

2.4-2.4835GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

2437MHz_TX

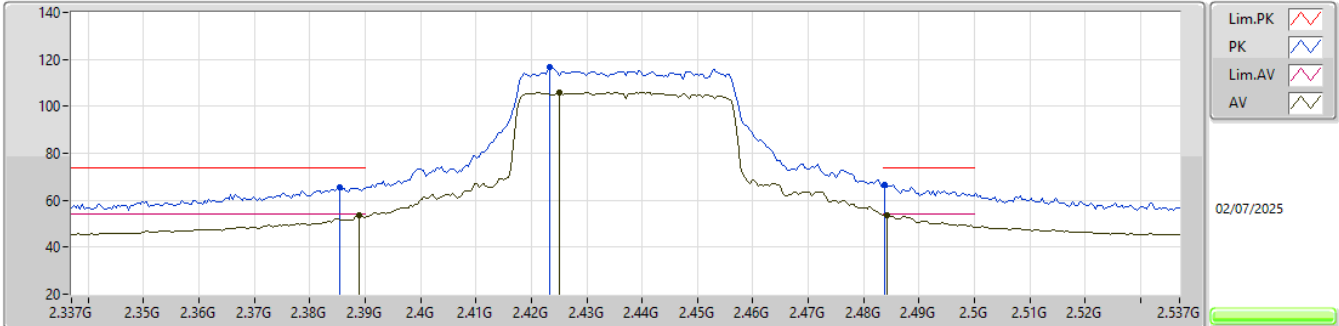


EUT_Z_4TX
Setting 55
03-E-J-5-13

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3854G	65.27	74.00	-8.73	66.36	3	Vertical	92	2.92	-	28.35	5.42	34.86			
AV	2.389G	53.83	54.00	-0.17	54.87	3	Vertical	92	2.92	-	28.39	5.43	34.86			
PK	2.4234G	116.73	Inf	-Inf	117.74	3	Vertical	92	2.92	-	28.40	5.47	34.88			
AV	2.425G	106.10	Inf	-Inf	107.11	3	Vertical	92	2.92	-	28.40	5.47	34.88			
PK	2.4838G	66.63	74.00	-7.37	67.60	3	Vertical	92	2.92	-	28.40	5.54	34.91			
AV	2.4842G	53.77	54.00	-0.23	54.74	3	Vertical	92	2.92	-	28.40	5.54	34.91			

2.4-2.4835GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

2437MHz_TX

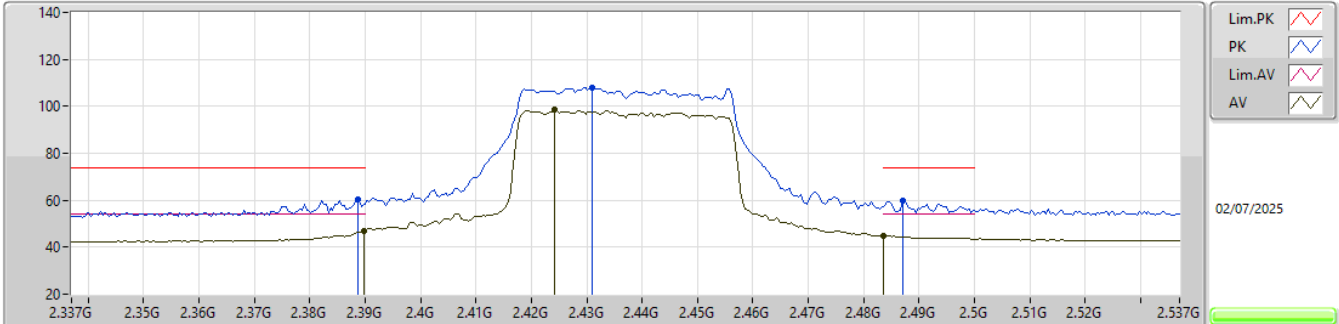


EUT_Z_4TX
Setting 55
03-E-J-5-13

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3886G	60.17	74.00	-13.83	61.21	3	Horizontal	0	1.96	-	28.39	5.43	34.86			
AV	2.3898G	46.76	54.00	-7.24	47.79	3	Horizontal	0	1.96	-	28.40	5.43	34.86			
PK	2.431G	108.03	Inf	-Inf	109.03	3	Horizontal	0	1.96	-	28.40	5.48	34.88			
AV	2.4242G	98.46	Inf	-Inf	99.47	3	Horizontal	0	1.96	-	28.40	5.47	34.88			
PK	2.487G	59.85	74.00	-14.15	60.82	3	Horizontal	0	1.96	-	28.40	5.54	34.91			
AV	2.4835G	44.98	54.00	-9.02	45.95	3	Horizontal	0	1.96	-	28.40	5.54	34.91			

2.4-2.4835GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

2437MHz_TX

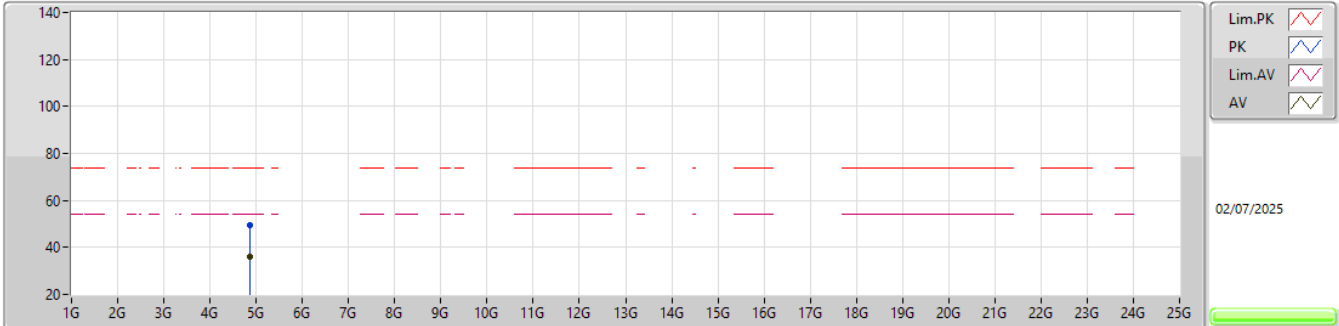


EUT_Z_4TX
Setting 55
03-E-J-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	4.87492G	49.48	74.00	-24.52	43.67	3	Vertical	215.8	2.75	-	33.55	7.18	34.92			
AV	4.8712G	35.97	54.00	-18.03	30.16	3	Vertical	215.8	2.75	-	33.54	7.19	34.92			

2.4-2.4835GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

2437MHz_TX

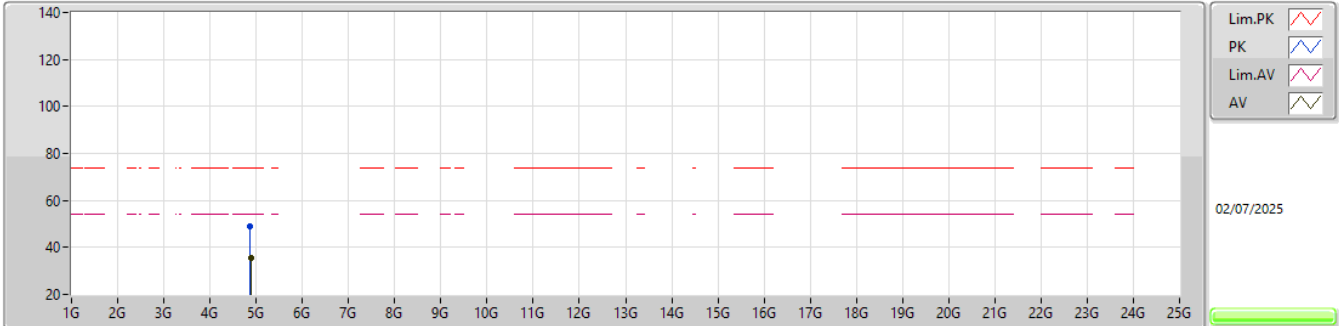


EUT_Z_4TX
Setting 55
03-E-J-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	4.86876G	48.74	74.00	-25.26	42.93	3	Horizontal	201	2.02	-	33.54	7.19	34.92			
AV	4.88016G	35.54	54.00	-18.46	29.73	3	Horizontal	201	2.02	-	33.56	7.18	34.93			

2.4-2.4835GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

2447MHz_TX

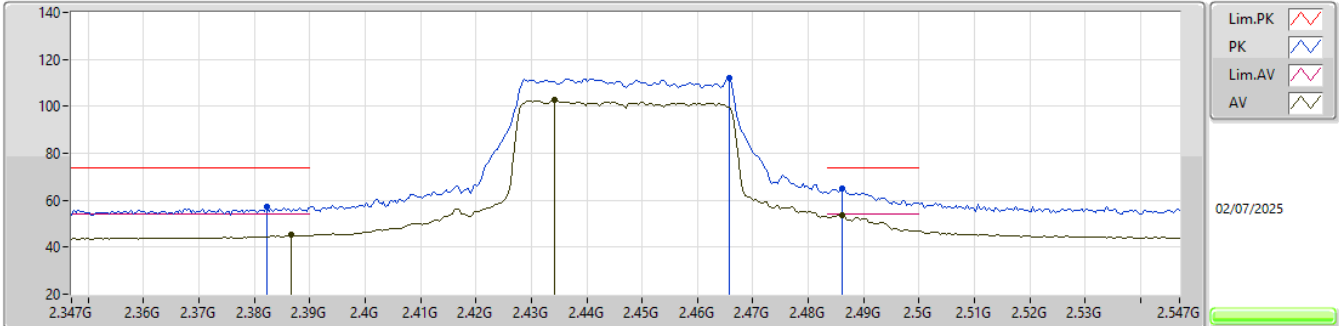


EUT_Z_4TX
Setting 48
03-E-J-5-13

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3822G	57.08	74.00	-16.92	58.20	3	Vertical	54	2.54	-	28.32	5.42	34.86			
AV	2.3866G	45.16	54.00	-8.84	46.23	3	Vertical	54	2.54	-	28.37	5.42	34.86			
PK	2.4658G	112.11	Inf	-Inf	113.13	3	Vertical	54	2.54	-	28.36	5.52	34.90			
AV	2.4342G	102.82	Inf	-Inf	103.82	3	Vertical	54	2.54	-	28.40	5.48	34.88			
PK	2.4862G	64.81	74.00	-9.19	65.78	3	Vertical	54	2.54	-	28.40	5.54	34.91			
AV	2.4862G	53.66	54.00	-0.34	54.63	3	Vertical	54	2.54	-	28.40	5.54	34.91			

2.4-2.4835GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

2447MHz_TX

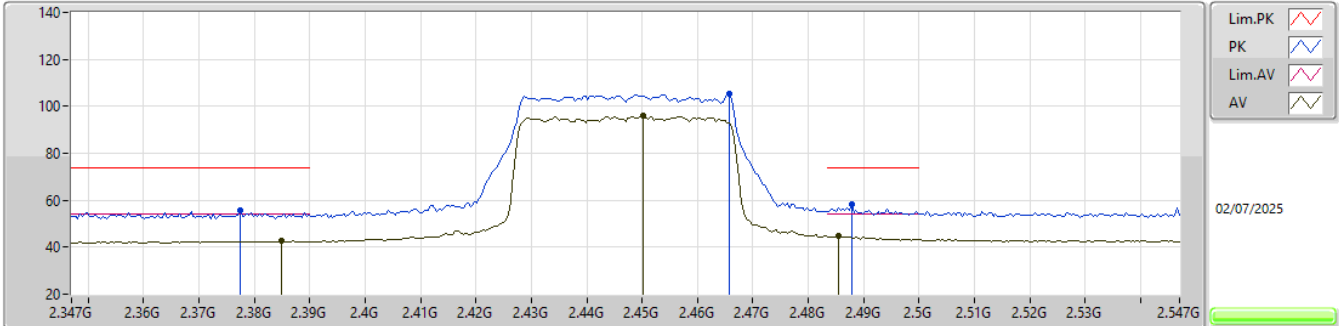


EUT_Z_4TX
Setting 48
03-E-J-5-13

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3774G	55.63	74.00	-18.37	56.77	3	Horizontal	205	2.29	-	28.30	5.41	34.85			
AV	2.385G	42.55	54.00	-11.45	43.64	3	Horizontal	205	2.29	-	28.35	5.42	34.86			
PK	2.4658G	105.46	Inf	-Inf	106.48	3	Horizontal	205	2.29	-	28.36	5.52	34.90			
AV	2.4502G	96.05	Inf	-Inf	97.14	3	Horizontal	205	2.29	-	28.30	5.50	34.89			
PK	2.4878G	58.07	74.00	-15.93	59.03	3	Horizontal	205	2.29	-	28.40	5.55	34.91			
AV	2.4854G	44.68	54.00	-9.32	45.65	3	Horizontal	205	2.29	-	28.40	5.54	34.91			

2.4-2.4835GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

2452MHz_TX

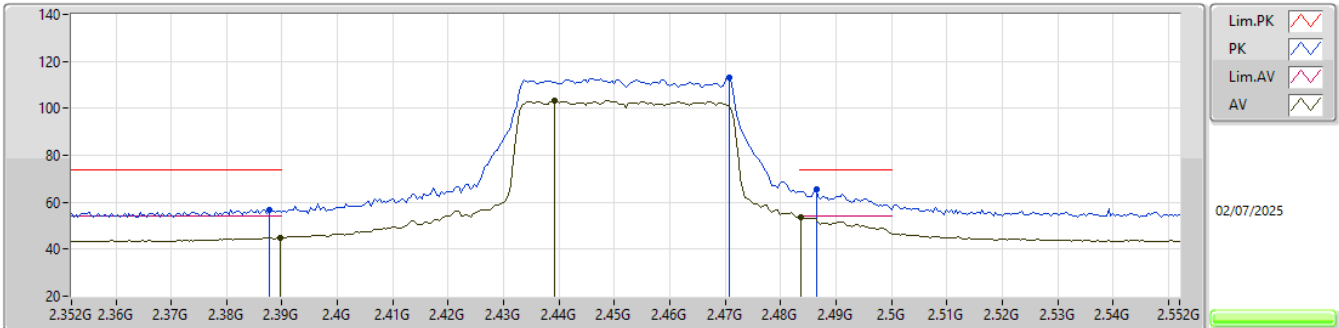


EUT_Z_4TX
Setting 48
03-E-J-5-13

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3876G	56.84	74.00	-17.16	57.90	3	Vertical	331	2.90	-	28.38	5.42	34.86			
AV	2.3896G	45.04	54.00	-8.96	46.07	3	Vertical	331	2.90	-	28.40	5.43	34.86			
PK	2.4708G	113.22	Inf	-Inf	114.20	3	Vertical	331	2.90	-	28.40	5.52	34.90			
AV	2.4392G	103.47	Inf	-Inf	104.47	3	Vertical	331	2.90	-	28.40	5.49	34.89			
PK	2.4864G	65.30	74.00	-8.70	66.27	3	Vertical	331	2.90	-	28.40	5.54	34.91			
AV	2.4836G	53.54	54.00	-0.46	54.51	3	Vertical	331	2.90	-	28.40	5.54	34.91			

2.4-2.4835GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

2452MHz_TX

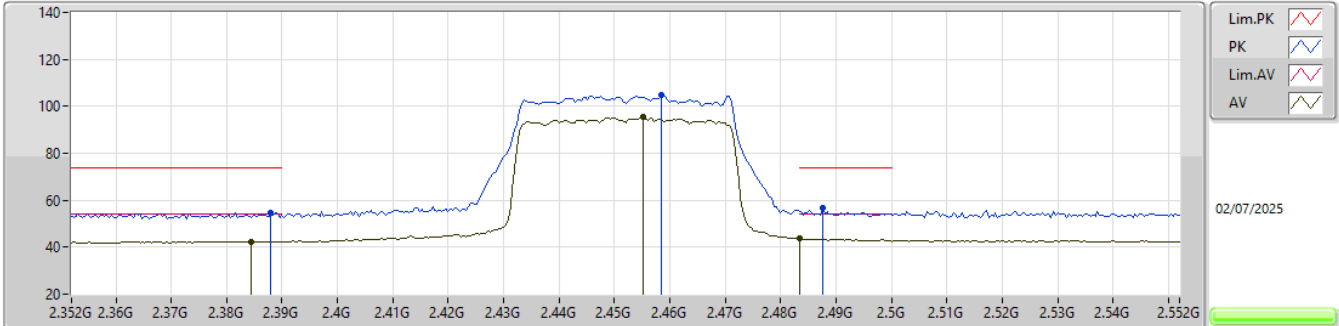


EUT_Z_4TX
Setting 48
03-E-J-5-13

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.388G	54.87	74.00	-19.13	55.93	3	Horizontal	76.6	2.64	-	28.38	5.42	34.86			
AV	2.3844G	42.49	54.00	-11.51	43.59	3	Horizontal	76.6	2.64	-	28.34	5.42	34.86			
PK	2.4584G	104.59	Inf	-Inf	105.68	3	Horizontal	76.6	2.64	-	28.30	5.51	34.90			
AV	2.4552G	95.41	Inf	-Inf	96.50	3	Horizontal	76.6	2.64	-	28.30	5.51	34.90			
PK	2.4876G	56.57	74.00	-17.43	57.53	3	Horizontal	76.6	2.64	-	28.40	5.55	34.91			
AV	2.4835G	43.57	54.00	-10.43	44.54	3	Horizontal	76.6	2.64	-	28.40	5.54	34.91			

2.4-2.4835GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

2452MHz_TX

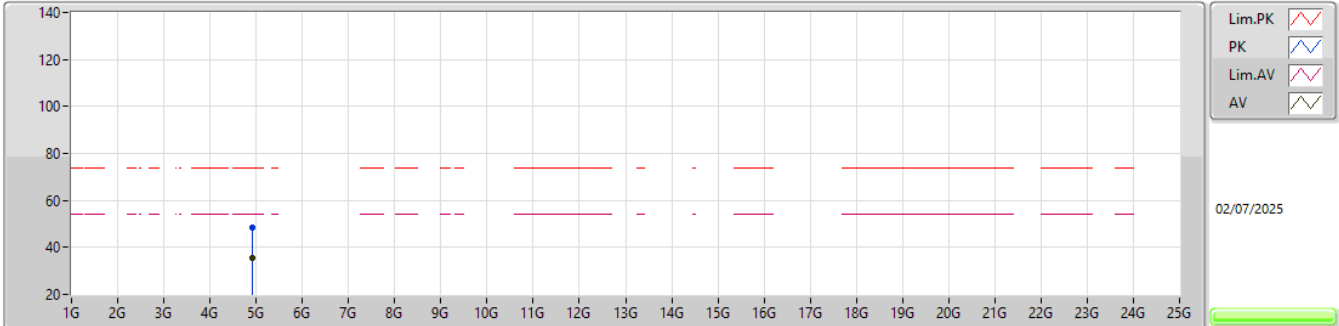


EUT_Z_4TX
Setting 48
03-E-J-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	4.90968G	48.31	74.00	-25.69	42.47	3	Vertical	297	2.83	-	33.60	7.17	34.93			
AV	4.90528G	35.57	54.00	-18.43	29.73	3	Vertical	297	2.83	-	33.60	7.17	34.93			

2.4-2.4835GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

2452MHz_TX

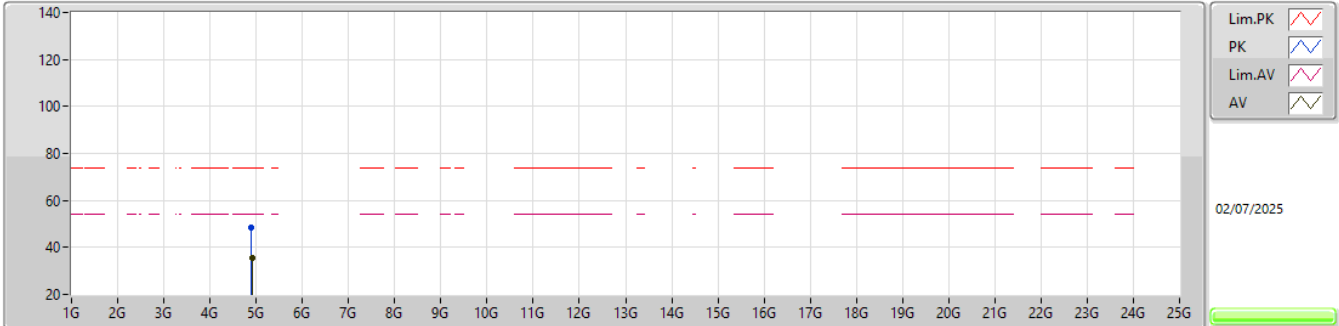

EUT_Z_4TX
Setting 48
03-E-J-5


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.89612G	48.51	74.00	-25.49	42.67	3	Horizontal	341	1.58	-	33.59	7.18	34.93			
AV	4.90676G	35.40	54.00	-18.60	29.56	3	Horizontal	341	1.58	-	33.60	7.17	34.93			



Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Condition
Mode 1	Pass	AV	1.75856G	24.51	54.00	-29.49	Vertical

Mode 1

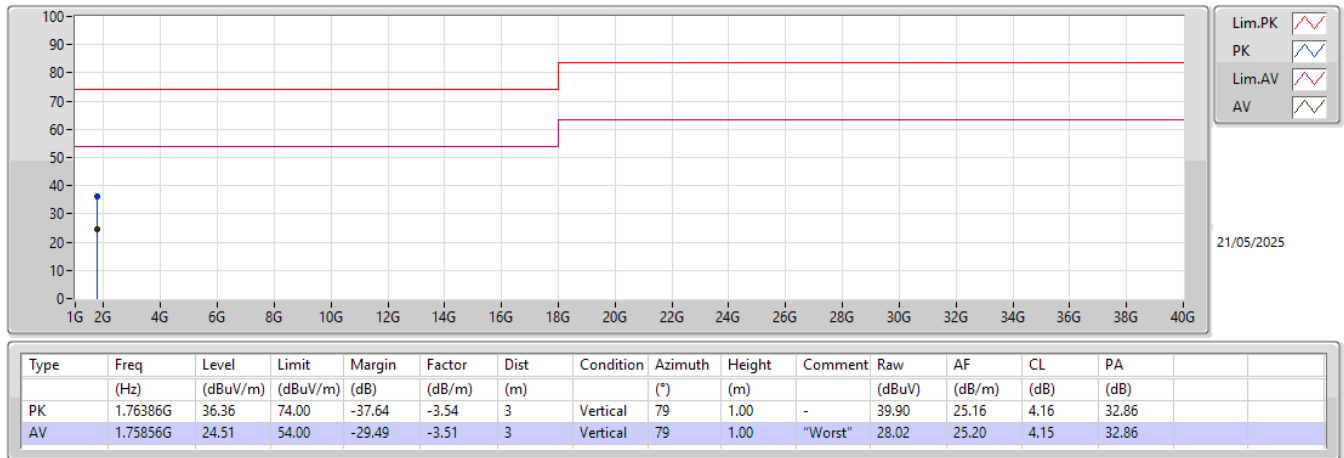

Mode 1

