

FCC TEST REPORT

REPORT NO.: RF920120R02

MODEL NO.: WLL3010

RECEIVED: Jan. 20, 2003

TESTED: Jan. 25 ~ Jan. 29, 2003

APPLICANT: ASKEY COMPUTER CORP.

ADDRESS: 10F, NO. 119, CHIENKANG RD., CHUNG-HO,
TAIPEI TAIWAN R.O.C

ISSUED BY: Advance Data Technology Corporation

LAB LOCATION: 47 14th Lin, Chiapau Tsun, Linko, Taipei,
Taiwan, R.O.C.

This test report consists of 80 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, NVLAP or any government agencies. The test results in the report only apply to the tested sample.



0528
ILAC MRA



Lab Code: 200102-0

Table of Contents

1	CERTIFICATION	5
2	SUMMARY OF TEST RESULTS	6
3	GENERAL INFORMATION	7
3.1	GENERAL DESCRIPTION OF EUT	7
3.2	DESCRIPTION OF TEST MODES	8
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	8
3.4	DESCRIPTION OF SUPPORT UNITS	9
4	TEST TYPES AND RESULTS	10
4.1	CONDUCTED EMISSION MEASUREMENT	10
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	10
4.1.2	TEST INSTRUMENTS	10
4.1.3	TEST PROCEDURES	11
4.1.4	DEVIATION FROM TEST STANDARD	11
4.1.5	TEST SETUP	12
4.1.6	EUT OPERATING CONDITIONS	12
4.1.7	TEST RESULTS	13
4.2	RADIATED EMISSION MEASUREMENT	19
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	19
4.2.2	TEST INSTRUMENTS	20
4.2.3	TEST PROCEDURES	21
4.2.4	DEVIATION FROM TEST STANDARD	21
4.2.5	TEST SETUP	22
4.2.6	EUT OPERATING CONDITIONS	22
4.2.7	TEST RESULTS (A)	23
4.2.8	TEST RESULTS (A) -OFDM	24
4.2.9	TEST RESULTS (A) -DSSS	27
4.2.10	TEST RESULTS (B)	30
5.	TEST RESULTS (B) -OFDM	31
4.2.11	TEST RESULTS (B) -DSSS	34
4.2.12	TEST RESULTS (C)	37
5.	TEST RESULTS (C) -OFDM	38
4.2.13	TEST RESULTS (C) -DSSS	41
4.3	6dB BANDWIDTH MEASUREMENT	44
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	44
4.3.2	TEST INSTRUMENTS	44



4.3.3	TEST PROCEDURE	45
4.3.4	DEVIATION FROM TEST STANDARD	45
4.3.5	TEST SETUP	45
4.3.6	EUT OPERATING CONDITIONS.....	45
4.3.7	TEST RESULTS -OFDM	46
4.3.8	TEST RESULTS -DSSS.....	50
4.4	MAXIMUM PEAK OUTPUT POWER	54
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	54
4.4.2	TEST INSTRUMENTS	54
4.4.3	TEST PROCEDURES.....	55
4.4.4	DEVIATION FROM TEST STANDARD	55
4.4.5	TEST SETUP	55
4.4.6	EUT OPERATING CONDITIONS.....	55
4.4.7	TEST RESULTS -OFDM	56
4.4.8	TEST RESULTS -DSSS.....	57
4.5	POWER SPECTRAL DENSITY MEASUREMENT	58
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	58
4.5.2	TEST INSTRUMENTS	58
4.5.3	TEST PROCEDURE	59
4.5.4	DEVIATION FROM TEST STANDARD	59
4.5.5	TEST SETUP	59
4.5.6	EUT OPERATING CONDITIONS.....	59
4.5.7	TEST RESULTS -OFDM	60
4.5.8	TEST RESULTS -DSSS.....	64
4.6	BAND EDGES MEASUREMENT	68
4.6.1	LIMITS OF BAND EDGES MEASUREMENT	68
4.6.2	TEST INSTRUMENTS	68
4.6.3	TEST PROCEDURE	68
4.6.4	DEVIATION FROM TEST STANDARD	68
4.6.5	EUT OPERATING CONDITION	69
4.6.6	TEST RESULTS -OFDM.....	69
4.6.7	TEST RESULTS -DSSS.....	72
4.7	ANTENNA REQUIREMENT.....	75
4.7.1	STANDARD APPLICABLE.....	75
4.7.2	ANTENNA CONNECTED CONSTRUCTION.....	75



5	PHOTOGRAPHS OF THE TEST CONFIGURATION	76
6	INFORMATION ON THE TESTING LABORATORIES	80



1 CERTIFICATION

PRODUCT : Wireless LAN Mini PCI Card
MODEL NO. : WLL3010
BRAND : Askey
APPLICANT : ASKEY COMPUTER CORP.
STANDARDS : 47 CFR Part 15, Subpart C (Section 15.247),
ANSI C63.4-1992

We, **Advance Data Technology Corporation**, hereby certify that one sample of the designation has been tested in our facility from Jan. 25 ~ Jan. 29. 2003. The test record, data evaluation and Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions herein specified.

CHECKED BY: Kelsey Chang **DATE:** Feb. 12, 2003
Kelsey Chang
APPROVED BY: Dr. Alan Lane **DATE:** Feb. 12, 2003
Dr. Alan Lane
Manager

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: 47 CFR Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit Minimum passing margin is -13.04dBuV at 0.171MHz
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit
15.247(c)	Transmitter Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit Minimum passing margin is -1.5dBuV at 172.00MHz /280.01MHz
15.247(d)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit
15.247(c)	Band Edge Measurement Limit: 20 dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Wireless LAN Mini PCI Card
MODEL NO.	WLL3010
POWER SUPPLY	3.3VDC from host equipment
MODULATION	BPSK, QPSK, CCK, 16QAM, 64QAM
RADIO TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	1/2/5.5/6/9/11/12/18/24/36/48/54Mbps
FREQUENCY RANGE	2412MHz ~ 2462MHz
CHANNEL SPACING	5MHz
NUMBER OF CHANNEL	11
OUTPUT POWER (OFDM)	14.89dBm
OUTPUT POWER (DSSS)	14.96dBm
ANTENNA TYPE	*refer to note1
DATA CABLE	NA
I/O PORTS	NA
ASSOCIATED DEVICES	NA

NOTE:

1. The detail of Three Antennas which on the below:

	Antenna Type		Antenna Gain	Test Result
	Main	Annex		
1	Patch Antenna	Printed Antenna	3dBi	A
2	Dipole Antenna	Patch Antenna	3dBi	B
3	Dipole Antenna	Printed Dipole Antenna	3dBi	C

2. For more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

Eleven channels are provided to this EUT.

Channel	Frequency	Channel	Frequency
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

NOTE:

1. Below 1 GHz, the channel 1, 6, and 11 were pre-tested in chamber. The channel 11, worst case one, was chosen for final test.
2. Above 1 GHz, the channel 1, 6, and 11 were tested individually.
3. Transfer rate, 11Mbps with CCK technique and 54Mbps with OFDM technique, the worst case, were chosen for final test.

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a Wireless LAN Mini PCI Card. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 15, Subpart C. (15.247)
ANSI C63.4 : 1992

All tests have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.



3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK	COMPAQ	N800C	NA	NA
2	PRINTER	EPSON	LQ-300+	DCGY017096	FCC DOC APPROVED

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	1.2m braid shielded wire, terminated with DB25 and Centronics connector via metallic frame, w/o core

NOTE: All power cords of the above support units are non shielded (1.8m).

4 TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ROHDE & SCHWARZ Test Receiver	ESHS30	828109/007	July 03, 2003
ROHDE & SCHWARZ Artificial Mains Network (for EUT)	ESH3-Z5	839135/006	July 02, 2003
* ROHDE & SCHWARZ 4-wire ISN	ENY41	838119/028	Nov. 29, 2003
* ROHDE & SCHWARZ 2-wire ISN	ENY22	837497/016	Nov. 29, 2003
EMCO-L.I.S.N. (for peripheral)	3825/2	9204-1964	July 02, 2003
Software	Cond-V2M1	NA	NA
RF cable (JYEBAO)	5D-FB	Cable-C02.01	July 5, 2003
HP Terminator (For EMCO LISN)	11593A	E1-01-298	Feb. 20, 2003
HP Terminator (For EMCO LISN)	11593A	E1-01-299	Feb. 20, 2003

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. "*": These equipment are used for conducted telecom port test only (if tested).
 3. The test was performed in ADT Shielded Room No. 2.
 4. The VCCI Site Registration No. is C-240.




4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels over 10dB under the prescribed limits could not be reported

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

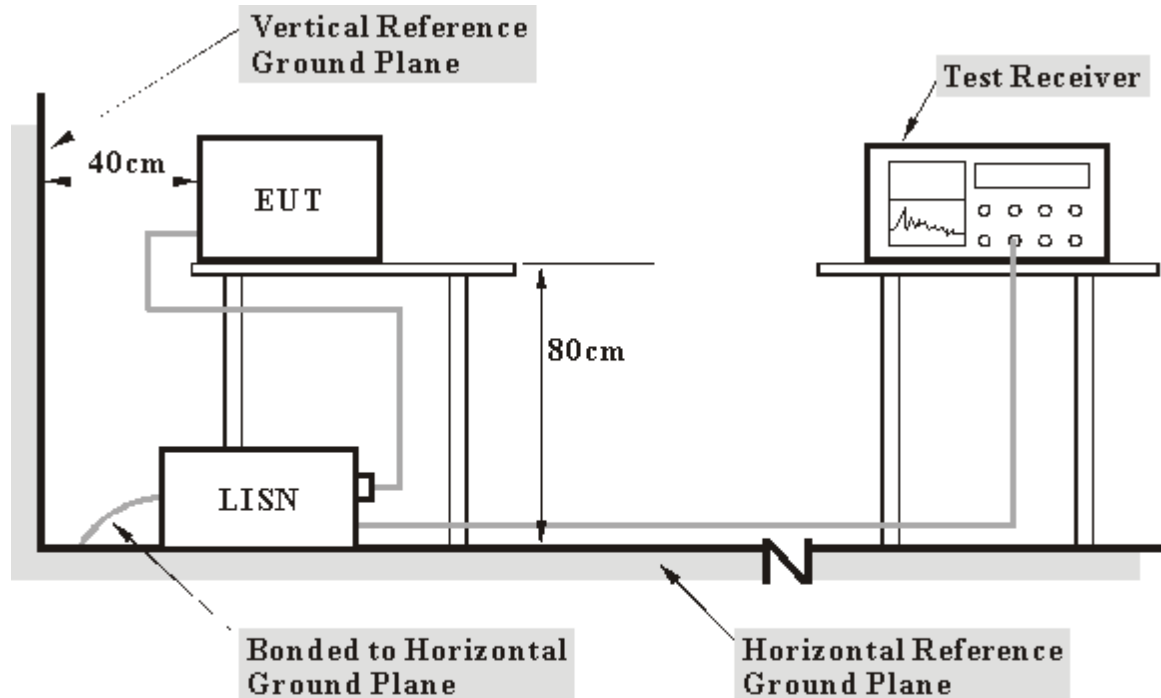

- Note:** 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS

- Plug the EUT into a computer system placed on a testing table.
- The computer system ran a test program to enable EUT under transmission/receiving condition continuously at specific channel frequency.
- The computer system sent "H" messages to its screen.
- The computer system sent "H" messages to modem.
- The computer system sent "H" messages to printer, and the printer prints them on paper.


4.1.7 TEST RESULTS

EUT	Wireless LAN Mini PCI Card	MODEL	WLL3010
MODE	Channel 1	6dB BANDWIDTH	10 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	20deg. C, 51%RH, 1005 hPa	TESTED BY: Cody Chang	

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.10	50.40	-	50.50	-	66.00	56.00	-15.50	-
2	0.177	0.10	48.80	-	48.90	-	64.63	54.63	-15.73	-
3	0.291	0.10	39.47	-	39.57	-	60.50	50.50	-20.93	-
4	0.399	0.10	34.64	-	34.74	-	57.87	47.87	-23.13	-
5	1.203	0.10	26.17	-	26.27	-	56.00	46.00	-29.73	-
6	18.953	1.16	32.25	-	33.41	-	60.00	50.00	-26.59	-

NOTE:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

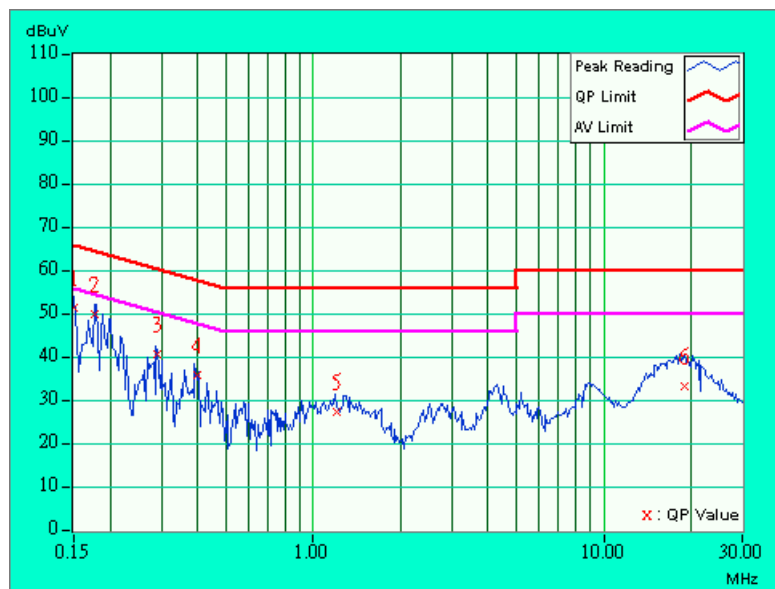


EUT	Wireless LAN Mini PCI Card	MODEL	WLL3010
MODE	Channel 1	6dB BANDWIDTH	10 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	20deg. C, 51%RH, 1005 hPa	TESTED BY: Cody Chang	

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.10	50.94	-	51.04	-	66.00	56.00	-14.96	-
2	0.171	0.10	51.77	-	51.87	-	64.91	54.91	-13.04	-
3	0.183	0.10	50.94	-	51.04	-	64.35	54.35	-13.31	-
4	0.225	0.10	38.63	-	38.73	-	62.63	52.63	-23.90	-
5	0.261	0.10	41.50	-	41.60	-	61.40	51.40	-19.80	-
6	0.375	0.10	35.91	-	36.01	-	58.39	48.39	-22.38	-

NOTE:

- 1.Q.P. and AV. are abbreviations of quasi-peak and average individually.
- 2."-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
- 3.The emission levels of other frequencies were very low against the limit.
- 4.Margin value = Emission level - Limit value
- 5.Correction factor = Insertion loss + Cable loss
- 6.Emission Level = Correction Factor + Reading Value..

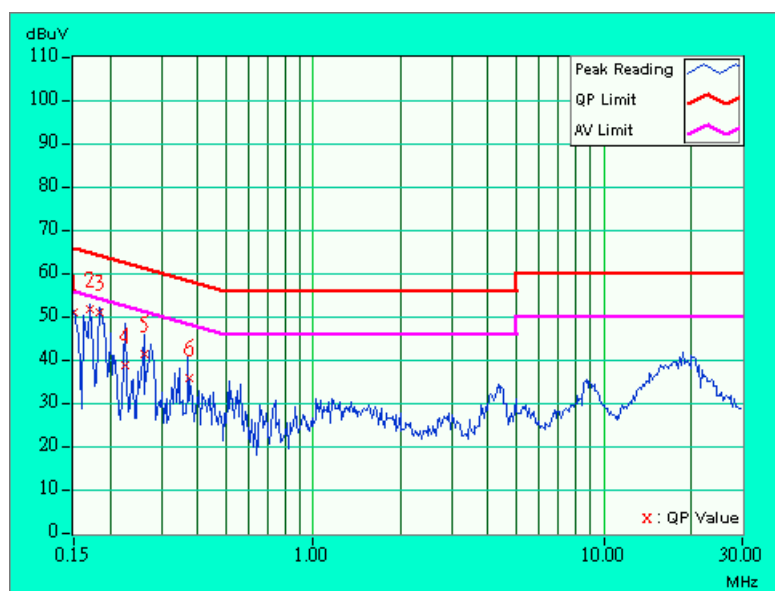


EUT	Wireless LAN Mini PCI Card	MODEL	WLL3010
MODE	Channel 6	6dB BANDWIDTH	10 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	20deg. C, 51%RH, 1005 hPa	TESTED BY: Cody Chang	

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.10	49.78	-	49.88	-	66.00	56.00	-16.12	-
2	0.189	0.10	48.24	-	48.34	-	64.08	54.08	-15.74	-
3	0.291	0.10	39.33	-	39.43	-	60.50	50.50	-21.07	-
4	0.375	0.10	32.69	-	32.79	-	58.39	48.39	-25.60	-
5	4.242	0.31	26.62	-	26.93	-	56.00	46.00	-29.07	-
6	18.050	1.12	32.04	-	33.16	-	60.00	50.00	-26.84	-

NOTE:

- 1.Q.P. and AV. are abbreviations of quasi-peak and average individually.
- 2."-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
- 3.The emission levels of other frequencies were very low against the limit.
- 4.Margin value = Emission level - Limit value
- 5.Correction factor = Insertion loss + Cable loss
- 6.Emission Level = Correction Factor + Reading Value

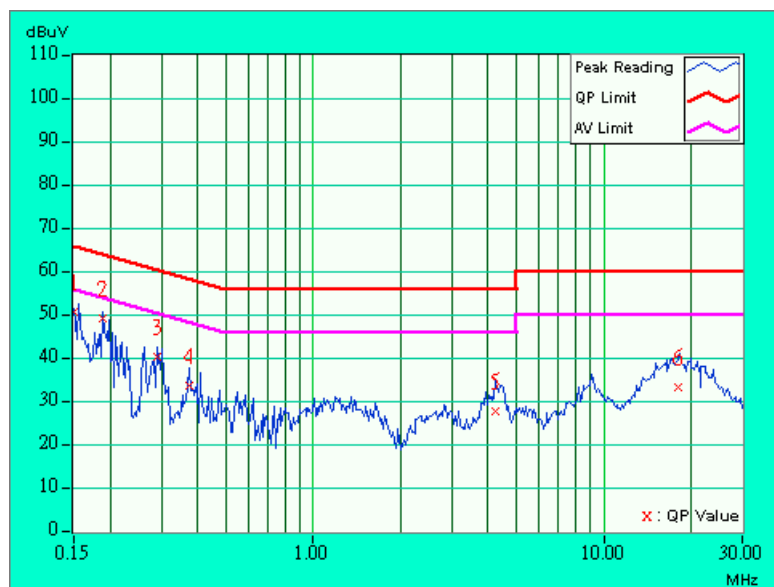


EUT	Wireless LAN Mini PCI Card	MODEL	WLL3010
MODE	Channel 6	6dB BANDWIDTH	10 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	20deg. C, 51%RH, 1005 hPa	TESTED BY: Cody Chang	

No	Freq.	Corr. Factor	Reading Value [dB (Uv)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.10	49.01	-	49.11	-	66.00	56.00	-16.89	-
2	0.210	0.10	46.78	-	46.88	-	63.21	53.21	-16.33	-
3	0.291	0.10	39.51	-	39.61	-	60.50	50.50	-20.89	-
4	0.423	0.10	33.59	-	33.69	-	57.39	47.39	-23.70	-
5	4.008	0.30	24.93	-	25.23	-	56.00	46.00	-30.77	-
6	17.525	0.90	31.41	-	32.31	-	60.00	50.00	-27.69	-

NOTE:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value

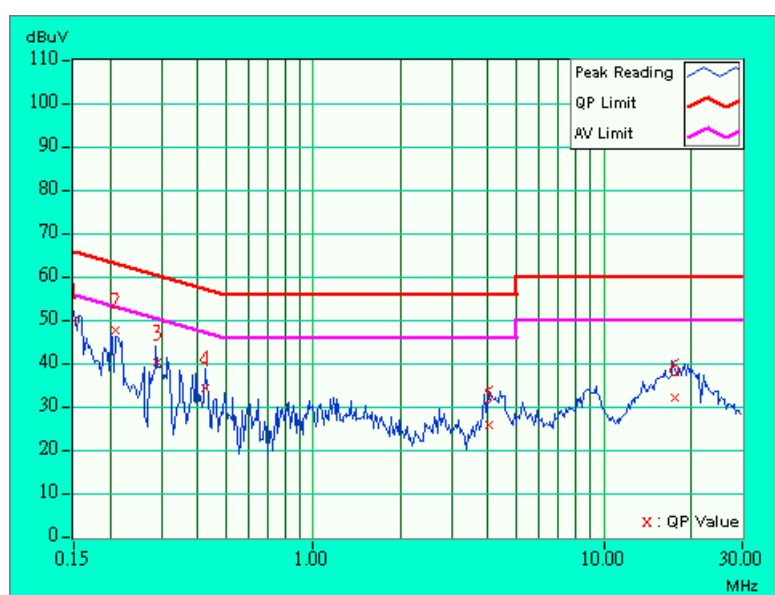


EUT	Wireless LAN Mini PCI Card	MODEL	WLL3010
MODE	Channel 11	6dB BANDWIDTH	10 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	20deg. C, 51%RH, 1005 hPa	TESTED BY: Cody Chang	

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.10	48.34	-	48.44	-	66.00	56.00	-17.56	-
2	0.162	0.10	46.35	-	46.45	-	65.36	55.36	-18.91	-
3	0.222	0.10	43.98	-	44.08	-	62.74	52.74	-18.66	-
4	0.468	0.10	27.04	-	27.14	-	56.55	46.55	-29.41	-
5	4.278	0.31	25.90	-	26.21	-	56.00	46.00	-29.79	-
6	17.228	1.09	30.97	-	32.06	-	60.00	50.00	-27.94	-

NOTE:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value

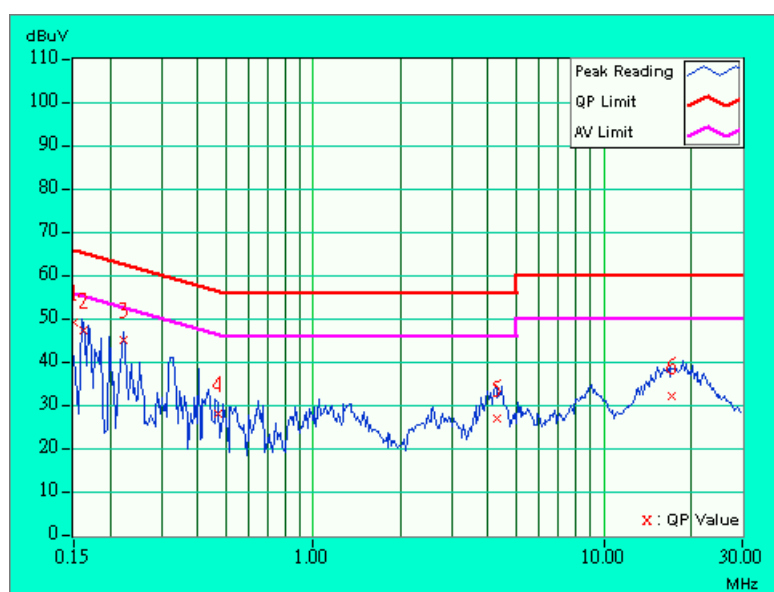


EUT	Wireless LAN Mini PCI Card	MODEL	WLL3010
MODE	Channel 11	6dB BANDWIDTH	10 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	20deg. C, 51%RH, 1005 hPa	TESTED BY: Cody Chang	

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.10	49.09	-	49.19	-	66.00	56.00	-16.81	-
2	0.207	0.10	45.73	-	45.83	-	63.32	53.32	-17.49	-
3	0.309	0.10	38.99	-	39.09	-	60.00	50.00	-20.91	-
4	1.047	0.10	26.17	-	26.27	-	56.00	46.00	-29.73	-
5	4.110	0.30	25.21	-	25.51	-	56.00	46.00	-30.49	-
6	20.213	1.01	30.42	-	31.43	-	60.00	50.00	-28.57	-

NOTE:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value

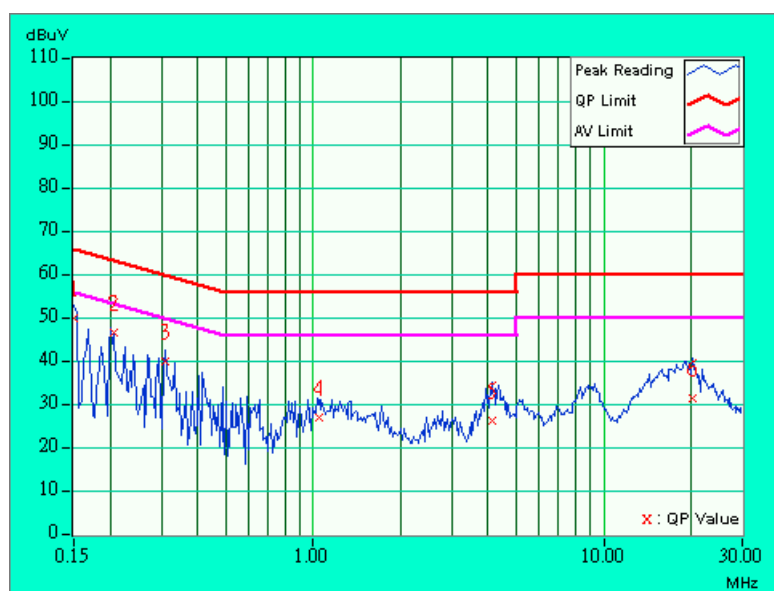

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
* HP Spectrum Analyzer	8590L	3544A01176	May 13, 2003
* HP Preamplifier	8447D	2944A08485	Apr. 29, 2003
* HP Preamplifier	8449B	3008A01201	Dec. 01, 2003
* HP Preamplifier	8449B	3008A01292	Aug. 07, 2003
* ROHDE & SCHWARZ TEST RECEIVER	ESMI	839013/007 839379/002	Jan. 27, 2003
SCHAFFNER Tunable Dipole Antenna	VHBA 9123	459	Nov. 22, 2003
SCHWARZBECK Tunable Dipole Antenna	UHA 9105	977	
* CHASE BILOG Antenna	CBL6112A	2221	Aug. 2, 2003
* SCHWARZBECK Horn Antenna	BBHA9120-D1	D130	July 3, 2003
* EMCO Horn Antenna	3115	9312-4192	April 9, 2003
* EMCO Turn Table	1060	1115	NA
* SHOSHIN Tower	AP-4701	A6Y005	NA
* Software	ADT_Radiated_V5.09	NA	NA
* ANRITSU RF Switches	MP59B	M35046	July 11, 2003
* TIMES RF cable	LMR-600	CABLE-ST5-01	July. 11. 2003

NOTE: 1. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

2. "*" = These equipment are used for the final measurement.
3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The test was performed in ADT Open Site No. 5.
5. The VCCI Site Registration No. is R-1039.



4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 300 Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

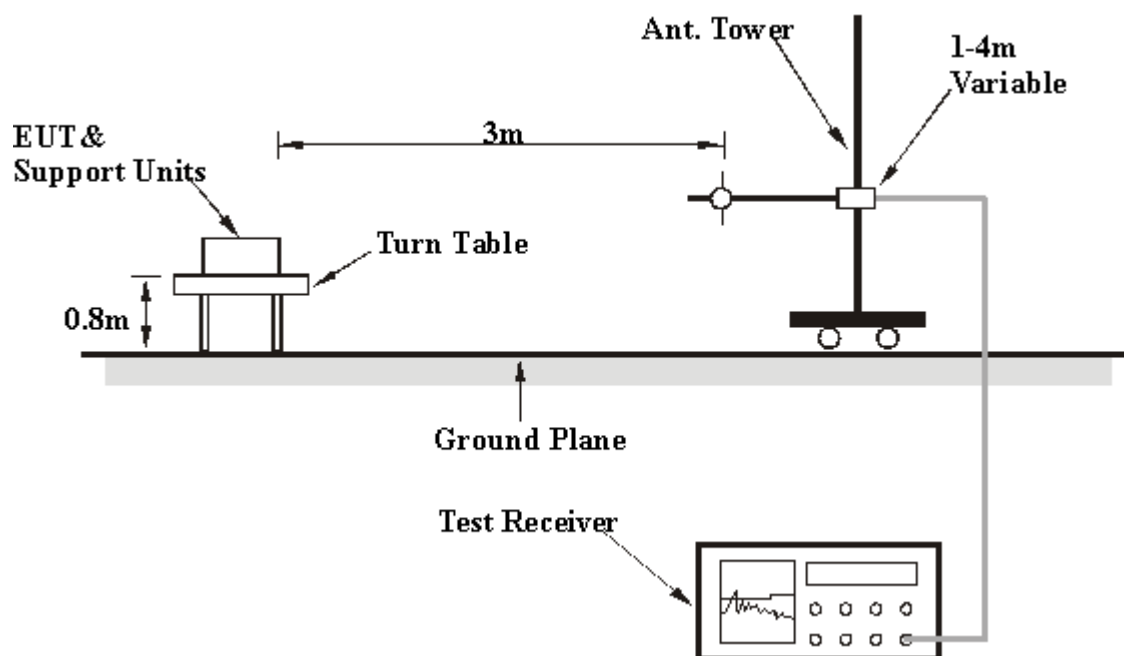

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6

4.2.7 TEST RESULTS (A)

EUT	Wireless LAN Mini PCI Card	MODEL	WLL3010
MODE	Channel 11	FREQUENCY RANGE	Below 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25 deg. C, 60 % RH, 1050 hPa	TESTED BY: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	120.00	32.0 QP	43.50	-11.50	1.21 H	45	18.50	13.50
2	156.00	36.7 QP	43.50	-6.80	1.34 H	169	25.60	11.10
3	159.95	34.0 QP	43.50	-9.50	1.45 H	106	23.10	10.80
4	202.40	40.7 QP	43.50	-2.80	1.41 H	172	29.50	11.20
5	239.97	40.4 QP	46.00	-5.60	1.15 H	266	25.80	14.70
6	265.75	43.5 QP	46.00	-2.50	1.22 H	173	26.90	16.60
7	335.36	44.3 QP	46.00	-1.70	1.08 H	178	26.90	17.40
8	400.69	41.8 QP	46.00	-4.20	1.02 H	221	22.60	19.10
9	511.50	37.5 QP	46.00	-8.50	1.08 H	113	16.40	21.20
10	524.80	40.9 QP	46.00	-5.10	1.16 H	353	19.70	21.10

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	120.00	38.1 QP	43.50	-5.40	1.41 V	191	24.60	13.50
2	149.24	38.8 QP	43.50	-4.70	1.28 V	56	27.20	11.50
3	185.00	37.0 QP	43.50	-6.50	1.28 V	45	26.30	10.70
4	240.00	40.2 QP	46.00	-5.80	1.06 V	81	25.60	14.70
5	268.00	40.2 QP	46.00	-5.80	1.20 V	86	23.70	16.50
6	330.16	41.6 QP	46.00	-4.40	1.46 V	181	24.30	17.30
7	372.22	38.8 QP	46.00	-7.20	1.40 V	232	20.50	18.30
8	454.98	38.7 QP	46.00	-7.30	1.16 V	101	18.80	19.90
9	480.01	35.7 QP	46.00	-10.30	1.12 V	357	15.10	20.60
10	529.80	40.1 QP	46.00	-5.90	1.39 V	222	19.00	21.10

NOTE:

1. Emission level = Raw value - Correction Factor
2. Correction Factor = Pre-Amp. Factor - Ant. Factor - Cable loss
(Pre-Amp. Factor = 0, when a Pre-Amplifier is not used for the test.)
3. Margin value = Emission level - Limit value
4. The other emission levels were very low against the limit.

4.2.8 TEST RESULTS (A) -OFDM

EUT	Wireless LAN Mini PCI Card	MODEL	WLL3010
MODE	Channel 1	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 60 % RH, 1050 hPa	TESTED BY: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1608.00	42.2 PK	74.00	-31.80	1.39 H	359	10.60	31.60
2	*2412.00	95.2 PK			1.41 H	183	62.40	32.80
2	*2412.00	86.7 AV			1.41 H	183	53.90	31.60
3	3216.00	48.0 PK	74.00	-26.00	1.24 H	54	14.10	33.90
4	4824.00	45.2 PK	74.00	-28.80	2.41 H	84	8.20	36.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1608.00	43.6 PK	74.00	-30.40	1.54 V	81	12.00	31.60
2	*2412.00	102.9 PK			1.12 V	34	70.10	32.80
2	*2412.00	90.0 AV			1.12 V	34	57.20	31.60
3	3216.00	48.4 PK	74.00	-25.60	1.52 V	74	14.50	33.90
4	4824.00	44.7 PK	74.00	-29.30	1.14 V	51	7.80	36.90

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “ : Fundamental frequency.
 6. The other emission levels were very low against the limit.

EUT	Wireless LAN Mini PCI Card	MODEL	WLL3010
MODE	Channel 6	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 60 % RH, 1050 hPa	TESTED BY: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1624.20	41.5 PK	74.00	-32.50	1.12 H	31	9.90	31.60
2	*2437.00	96.5 PK			1.44 H	142	63.70	32.80
2	*2437.00	83.8 AV			1.44 H	142	51.00	31.60
3	3249.00	47.3 PK	74.00	-26.70	1.26 H	327	13.40	33.90
4	4874.00	45.2 PK	74.00	-28.80	1.12 H	54	8.00	37.10

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1624.00	41.4 PK	74.00	-32.60	1.30 V	47	9.80	31.60
2	*2437.00	104.1 PK			1.00 V	346	71.20	32.80
2	*2437.00	88.8 AV			1.00 V	346	56.00	31.60
3	3248.00	47.3 PK	74.00	-26.70	1.26 V	45	13.40	33.90
4	4874.00	45.4 PK	74.00	-28.60	1.15 V	324	8.20	37.10

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ” : Fundamental frequency.
 6. The other emission levels were very low against the limit.

EUT	Wireless LAN Mini PCI Card	MODEL	WLL3010
MODE	Channel 11	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 60 % RH, 1050 hPa	TESTED BY: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1641.00	40.2 PK	74.00	-33.80	1.15 H	74	8.50	31.60
2	*2463.00	101.0 PK			1.34 H	187	68.10	32.90
2	*2463.00	85.9 AV			1.34 H	187	53.10	31.60
3	3282.00	46.0 PK	74.00	-28.00	1.31 H	45	12.10	33.90
4	4924.00	45.2 PK	74.00	-28.80	1.26 H	45	7.80	37.30

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1640.00	42.2 PK	74.00	-31.80	1.36 V	51	10.50	31.60
2	*2463.00	102.7 PK			1.25 V	207	69.90	32.90
2	*2463.00	90.2 AV			1.25 V	207	57.40	31.60
3	3282.00	47.6 PK	74.00	-26.40	1.08 V	45	13.70	33.90
4	4924.00	46.6 PK	74.00	-27.40	1.22 V	325	9.20	37.30

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ” : Fundamental frequency.
 6. The other emission levels were very low against the limit.

4.2.9 TEST RESULTS (A) -DSSS

EUT	Wireless LAN Mini PCI Card	MODEL	WLL3010
MODE	Channel 1	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 60 % RH, 1050 hPa	TESTED BY: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1608.00	38.6 PK	74.00	-35.40	1.15 H	47	7.00	31.60
2	*2412.00	102.4 PK			1.14 H	324	69.70	32.80
2	*2412.00	94.2 AV			1.14 H	324	61.50	31.60
3	3216.50	43.8 PK	74.00	-30.20	1.12 H	41	9.90	33.90
4	4824.00	46.7 PK	74.00	-27.30	1.37 H	54	9.70	36.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1608.00	40.5 PK	74.00	-33.50	1.13 V	10	8.90	31.60
2	*2412.00	105.2 PK			1.06 V	129	72.50	32.80
2	*2412.00	96.6 AV			1.06 V	129	63.90	31.60
3	3216.00	47.3 PK	74.00	-26.70	1.10 V	277	13.40	33.90
4	4824.00	46.7 PK	74.00	-27.30	1.35 V	360	9.70	36.90

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ” : Fundamental frequency.
 6. The other emission levels were very low against the limit.

EUT	Wireless LAN Mini PCI Card	MODEL	WLL3010
MODE	Channel 6	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 60 % RH, 1050 hPa	TESTED BY: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1624.20	40.6 PK	74.00	-33.40	1.35 H	77	9.00	31.60
2	*2437.00	101.8 PK			1.29 H	123	69.00	32.80
2	2437.00	94.4 AV			1.29 H	123	61.60	31.60
3	3248.00	43.8 PK	74.00	-30.20	1.15 H	74	9.90	33.90
4	4874.00	46.2 PK	74.00	-27.80	1.22 H	85	9.00	37.10

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1624.50	39.3 PK	74.00	-34.70	1.18 V	43	7.70	31.60
2	*2437.00	107.0 PK			1.06 V	275	74.20	32.80
2	*2437.00	98.9 AV			1.06 V	275	66.10	31.60
3	3248.90	49.0 PK	74.00	-25.00	1.42 V	84	15.10	33.90
4	4874.00	46.6 PK	74.00	-27.40	1.15 V	74	9.40	37.10

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ” : Fundamental frequency.
 6. The other emission levels were very low against the limit.

EUT	Wireless LAN Mini PCI Card	MODEL	WLL3010
MODE	Channel 11	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 60 % RH, 1050 hPa	TESTED BY: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1641.00	41.2 PK	74.00	-32.80	1.28 H	45	9.50	31.60
2	*2463.00	104.3 PK			1.16 H	125	71.50	32.90
2	*2463.00	96.3 AV			1.16 H	125	63.50	31.60
3	3282.00	45.3 PK	74.00	-28.70	1.44 H	91	11.40	33.90
4	4924.00	46.4 PK	74.00	-27.60	1.37 H	54	9.00	37.30

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1641.00	42.0 PK	74.00	-32.00	1.24 V	14	10.40	31.60
2	*2463.00	107.5 PK			1.42 V	54	74.60	32.90
2	*2463.00	99.7 AV			1.42 V	54	66.80	31.60
3	3282.70	48.6 PK	74.00	-25.40	1.12 V	34	14.70	33.90
4	4924.00	46.5 PK	74.00	-27.50	1.84 V	76	9.20	37.30

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ” : Fundamental frequency.
 6. The other emission levels were very low against the limit.

4.2.10 TEST RESULTS (B)

EUT	Wireless LAN Mini PCI Card	MODEL	WLL3010
MODE	Channel 11	FREQUENCY RANGE	Below 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25 deg. C, 60 % RH, 1050 hPa	TESTED BY: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	120.00	36.0 QP	43.50	-7.50	1.54 H	45	22.50	13.50
2	186.00	38.6 QP	43.50	-4.90	1.31 H	164	27.90	10.70
3	204.70	40.9 QP	43.50	-2.60	1.35 H	169	29.50	11.40
4	240.00	39.3 QP	46.00	-6.70	1.39 H	4	24.60	14.70
5	310.80	43.6 QP	46.00	-2.40	1.49 H	147	26.60	17.00
6	330.00	43.5 QP	46.00	-2.50	1.15 H	38	26.20	17.30
7	373.80	42.1 QP	46.00	-3.90	1.10 H	7	23.80	18.40
8	405.30	42.0 QP	46.00	-4.00	1.07 H	14	22.90	19.20
9	440.04	38.2 QP	46.00	-7.80	1.07 H	26	18.50	19.60
10	462.50	39.6 QP	46.00	-6.40	1.06 H	162	19.40	20.10
11	479.98	41.4 QP	46.00	-4.60	1.10 H	82	20.80	20.60
12	541.00	41.1 QP	46.00	-4.90	1.10 H	217	20.00	21.10
13	720.03	34.7 QP	46.00	-11.30	1.35 H	0	11.20	23.50

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	120.00	38.1 QP	43.50	-5.40	1.12 V	221	24.70	13.50
2	159.99	37.6 QP	43.50	-5.90	1.28 V	137	26.80	10.80
3	239.99	39.5 QP	46.00	-6.50	1.47 V	2	24.80	14.70
4	334.30	41.5 QP	46.00	-4.50	1.43 V	314	24.00	17.40
5	335.80	40.3 QP	46.00	-5.70	1.40 V	29	22.80	17.40
6	459.30	38.9 QP	46.00	-7.10	1.36 V	3	18.80	20.00
7	479.99	40.0 QP	46.00	-6.00	1.22 V	330	19.30	20.60
8	524.80	41.4 QP	46.00	-4.60	1.49 V	104	20.20	21.10
9	542.30	43.2 QP	46.00	-2.80	1.28 V	255	22.10	21.10
10	599.99	42.4 QP	46.00	-3.60	1.51 V	96	19.70	22.70

NOTE:

1. Emission level = Raw value - Correction Factor
2. Correction Factor = Pre-Amp. Factor - Ant. Factor - Cable loss
(Pre-Amp. Factor = 0, when a Pre-Amplifier is not used for the test.)
3. Margin value = Emission level - Limit value
4. The other emission levels were very low against the limit.

5. TEST RESULTS (B) -OFDM

EUT	Wireless LAN Mini PCI Card	MODEL	WLL3010
MODE	Channel 1	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 60 % RH, 1050 hPa	TESTED BY: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1608.40	41.3 PK	74.00	-32.70	1.30 H	87	9.70	31.60
2	*2412.00	98.5 PK			1.00 H	81	65.80	32.80
2	*2412.00	86.3 AV			1.00 H	81	53.50	31.60
3	3216.00	43.3 PK	74.00	-30.70	1.33 H	45	9.40	33.90
4	4824.00	44.7 PK	74.00	-29.30	1.24 H	334	7.70	36.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1608.00	40.6 PK	74.00	-33.40	1.12 V	54	9.00	31.60
2	*2412.00	100.7 PK			1.16 V	154	68.00	32.80
2	*2412.00	86.6 AV			1.16 V	154	53.90	31.60
3	3216.00	47.9 PK	74.00	-26.10	1.24 V	82	14.00	33.90
4	4824.00	47.2 PK	74.00	-26.80	1.16 V	48	10.20	36.90

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ” : Fundamental frequency.
 6. The other emission levels were very low against the limit.

EUT	Wireless LAN Mini PCI Card	MODEL	WLL3010
MODE	Channel 6	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 60 % RH, 1050 hPa	TESTED BY: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1624.50	40.6 PK	74.00	-33.40	1.18 H	74	9.00	31.60
2	*2437.00	98.4 PK			1.06 H	355	65.60	32.80
2	*2437.00	87.6 AV			1.06 H	355	54.80	31.60
3	3249.00	45.3 PK	74.00	-28.70	1.26 H	161	11.40	33.90
4	4874.00	45.2 PK	74.00	-28.80	1.09 H	324	8.00	37.10

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1624.50	40.9 PK	74.00	-33.10	1.12 V	67	9.30	31.60
2	*2437.00	101.5 PK			1.24 V	204	68.70	32.80
2	*2437.00	87.8 AV			1.24 V	204	55.00	31.60
3	3248.80	46.5 PK	74.00	-27.50	1.30 V	225	12.60	33.90
4	4874.00	46.4 PK	74.00	-27.60	1.18 V	74	9.20	37.10

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ” : Fundamental frequency.
 6. The other emission levels were very low against the limit.

EUT	Wireless LAN Mini PCI Card	MODEL	WLL3010
MODE	Channel 11	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 60 % RH, 1050 hPa	TESTED BY: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1641.00	39.2 PK	74.00	-34.80	1.54 H	71	7.50	31.60
2	*2463.00	101.7 PK			1.39 H	205	68.90	32.90
2	*2463.00	90.1 AV			1.39 H	205	57.20	31.60
3	3282.00	45.1 PK	74.00	-28.90	1.01 H	24	11.20	33.90
4	4924.00	47.6 PK	74.00	-26.40	1.54 H	84	10.20	37.30

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1641.00	41.4 PK	74.00	-32.60	1.38 V	74	9.70	31.60
2	*2463.00	101.9 PK			1.18 V	199	70.20	31.60
2	*2463.00	89.7 AV			1.18 V	199	58.00	31.60
3	3282.00	47.0 PK	74.00	-27.00	1.25 V	45	13.10	33.90
4	4924.00	45.6 PK	74.00	-28.40	1.14 V	57	8.20	37.30

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ” : Fundamental frequency.
 6. The other emission levels were very low against the limit.

4.2.11 TEST RESULTS (B) -DSSS

EUT	Wireless LAN Mini PCI Card	MODEL	WLL3010
MODE	Channel 1	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 60 % RH, 1050 hPa	TESTED BY: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1608.00	42.1 PK	74.00	-31.90	1.42 H	87	10.50	31.60
2	*2412.00	101.1 PK			1.66 H	346	68.40	32.80
2	*2412.00	93.6 AV			1.66 H	346	60.90	31.60
3	3216.00	47.8 PK	74.00	-26.20	1.42 H	34	13.90	33.90
4	4824.00	44.2 PK	74.00	-29.80	1.15 H	84	7.30	36.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1608.40	40.6 PK	74.00	-33.40	1.04 V	87	9.00	31.60
2	*2412.00	104.9 PK			1.14 V	54	72.10	32.80
2	*2412.00	96.0 AV			1.14 V	54	63.20	31.60
3	3216.00	50.2 PK	74.00	-23.80	1.12 V	174	16.30	33.90
3	3216.00	47.5 AV	54.00	-6.50	1.12 V	174	13.60	32.80
4	4824.00	46.7 PK	74.00	-27.30	1.19 V	284	9.70	36.90

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “ : Fundamental frequency.
 6. The other emission levels were very low against the limit.

EUT	Wireless LAN Mini PCI Card	MODEL	WLL3010
MODE	Channel 6	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 60 % RH, 1050 hPa	TESTED BY: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1624.20	39.1 PK	74.00	-34.90	1.52 H	74	7.50	31.60
2	*2437.00	103.2 PK			1.34 H	45	70.40	32.80
2	*2437.00	95.0 AV			1.34 H	45	62.20	31.60
3	3248.00	45.8 PK	74.00	-28.20	1.18 H	124	11.90	33.90
4	4874.00	46.9 PK	74.00	-27.10	1.13 H	55	9.70	37.10

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1624.50	39.9 PK	74.00	-34.10	1.42 V	45	8.30	31.60
2	*2437.00	104.8 PK			1.00 V	195	72.00	32.80
2	*2437.00	97.6 AV			1.00 V	195	64.80	31.60
3	3248.50	50.0 PK	74.00	-24.00	1.15 V	34	16.10	33.90
3	3248.50	46.9 AV	54.00	-7.10	1.15 V	34	13.00	32.80
4	4874.00	46.4 PK	74.00	-27.60	1.68 V	52	9.20	37.10

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ” : Fundamental frequency.
 6. The other emission levels were very low against the limit.

EUT	Wireless LAN Mini PCI Card	MODEL	WLL3010
MODE	Channel 11	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 60 % RH, 1050 hPa	TESTED BY: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1641.50	40.0 PK	74.00	-34.00	1.34 H	87	8.30	31.60
2	*2463.00	102.6 PK			1.50 H	295	69.80	32.90
2	*2463.00	96.4 AV			1.50 H	295	63.60	31.60
3	3284.00	42.1 PK	74.00	-31.90	1.57 H	32	8.20	33.90
4	4924.00	45.4 PK	74.00	-28.60	1.12 H	45	8.00	37.30

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1641.00	40.0 PK	74.00	-34.00	1.30 V	55	8.30	31.60
2	*2463.00	108.9 PK			1.08 V	135	76.00	32.90
2	*2463.00	100.0 AV			1.08 V	135	67.20	31.60
3	3282.00	49.0 PK	74.00	-25.00	1.16 V	3	15.10	33.90
4	4924.00	46.8 PK	74.00	-27.20	1.18 V	57	9.40	37.30

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ” : Fundamental frequency.
 6. The other emission levels were very low against the limit.

4.2.12 TEST RESULTS (C)

EUT	Wireless LAN Mini PCI Card	MODEL	WLL3010
MODE	Channel 11	FREQUENCY RANGE	Below 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25 deg. C, 60 % RH, 1050 hPa	TESTED BY: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	120.00	37.0 QP	43.50	-6.50	1.15 H	74	23.50	13.50
2	240.01	40.0 QP	46.00	-6.00	1.48 H	5	25.30	14.70
3	280.01	44.5 QP	46.00	-1.50	1.26 H	317	27.90	16.50
4	320.00	43.8 QP	46.00	-2.20	1.25 H	226	26.60	17.10
5	334.00	44.1 QP	46.00	-1.90	1.37 H	47	26.70	17.40
6	370.50	41.2 QP	46.00	-4.80	1.26 H	352	22.90	18.30
7	440.03	34.1 QP	46.00	-11.90	1.28 H	252	14.50	19.60
8	445.00	37.2 QP	46.00	-8.80	1.19 H	345	17.50	19.70
9	460.10	40.9 QP	46.00	-5.10	1.18 H	2	20.80	20.10
10	463.30	42.4 QP	46.00	-3.60	1.14 H	338	22.20	20.20
11	479.98	42.3 QP	46.00	-3.70	1.04 H	18	21.70	20.60
12	510.80	39.3 QP	46.00	-6.70	1.14 H	8	18.10	21.20
13	561.80	36.1 QP	46.00	-9.90	1.09 H	14	14.70	21.40

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	120.02	31.4 QP	43.50	-12.10	1.07 V	6	17.90	13.50
2	172.00	42.0 QP	43.50	-1.50	1.12 V	47	31.30	10.70
3	200.05	30.2 QP	43.50	-13.30	1.19 V	170	19.20	11.00
4	226.30	40.3 QP	46.00	-5.70	1.14 V	163	26.90	13.40
5	240.00	43.3 QP	46.00	-2.70	1.54 V	2	28.60	14.70
6	269.00	39.9 QP	46.00	-6.10	1.09 V	110	23.40	16.40
7	293.50	42.1 QP	46.00	-3.90	1.20 V	60	25.40	16.70
8	320.00	38.7 QP	46.00	-7.30	1.42 V	340	21.60	17.20
9	400.00	39.9 QP	46.00	-6.10	1.34 V	12	20.70	19.10
10	401.59	40.3 QP	46.00	-5.70	1.52 V	66	21.10	19.10
11	444.51	40.6 QP	46.00	-5.40	1.39 V	50	20.90	19.70
12	480.00	38.0 QP	46.00	-8.00	1.30 V	3	17.40	20.60
13	537.00	40.5 QP	46.00	-5.50	1.09 V	2	19.40	21.10

NOTE:

1. Emission level = Raw value - Correction Factor
2. Correction Factor = Pre-Amp. Factor - Ant. Factor - Cable loss
(Pre-Amp. Factor = 0, when a Pre-Amplifier is not used for the test.)
3. Margin value = Emission level - Limit value
4. The other emission levels were very low against the limit.

5. TEST RESULTS (C) -OFDM

EUT	Wireless LAN Mini PCI Card	MODEL	WLL3010
MODE	Channel 1	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 60 % RH, 1050 hPa	TESTED BY: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1608.00	40.3 PK	74.00	-33.70	1.15 H	48	8.70	31.60
2	*2412.00	98.8 PK			1.68 H	173	66.10	32.80
2	*2412.00	85.5 AV			1.68 H	173	52.80	31.60
3	3216.00	50.5 PK	74.00	-23.50	1.04 H	325	16.60	33.90
3	3216.00	47.3 AV	54.00	-6.70	1.04 H	325	13.40	32.80
4	4824.00	47.2 PK	74.00	-26.80	1.52 H	84	10.20	36.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1608.00	41.9 PK	74.00	-32.10	1.24 V	35	10.30	31.60
2	*2412.00	96.8 PK			1.48 V	134	64.10	32.80
2	*2412.00	85.3 AV			1.48 V	134	52.50	31.60
3	3216.00	45.8 PK	74.00	-28.20	1.28 V	51	11.90	33.90
4	4824.00	46.4 PK	74.00	-27.60	1.18 V	207	9.40	36.90

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “ : Fundamental frequency.
 6. The other emission levels were very low against the limit.

EUT	Wireless LAN Mini PCI Card	MODEL	WLL3010
MODE	Channel 6	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 60 % RH, 1050 hPa	TESTED BY: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1624.50	41.1 PK	74.00	-32.90	1.15 H	28	9.50	31.60
2	*2437.00	101.2 PK			1.41 H	137	68.40	32.80
2	*2437.00	88.0 AV			1.41 H	137	55.20	31.60
3	3248.50	46.3 PK	74.00	-27.70	1.32 H	15	12.40	33.90
4	4874.00	47.4 PK	74.00	-26.60	1.12 H	54	10.20	37.10

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1624.20	42.1 PK	74.00	-31.90	1.52 V	84	10.50	31.60
2	*2437.00	96.5 PK			1.30 V	22	63.70	32.80
2	*2437.00	84.1 AV			1.30 V	22	51.30	31.60
3	3248.50	48.6 PK	74.00	-25.40	1.12 V	85	14.70	33.90
4	4874.00	45.2 PK	74.00	-28.80	1.37 V	44	8.00	37.10

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ” : Fundamental frequency.
 6. The other emission levels were very low against the limit.

EUT	Wireless LAN Mini PCI Card	MODEL	WLL3010
MODE	Channel 11	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 60 % RH, 1050 hPa	TESTED BY: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1641.40	40.2 PK	74.00	-33.80	1.38 H	57	8.50	31.60
2	*2463.00	100.4 PK			1.34 H	233	67.50	32.90
2	*2463.00	87.9 AV			1.34 H	233	55.00	31.60
3	3282.00	49.2 PK	74.00	-24.80	1.12 H	54	15.30	33.90
4	4924.00	47.4 PK	74.00	-26.60	1.52 H	47	10.00	37.30

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1641.00	40.2 PK	74.00	-33.80	1.52 V	74	8.50	31.60
2	*2463.00	97.2 PK			1.15 V	34	64.40	32.90
2	*2463.00	86.2 AV			1.15 V	34	53.40	31.60
3	3282.00	48.8 PK	74.00	-25.20	1.13 V	54	14.90	33.90
4	4924.00	45.1 PK	74.00	-28.90	1.19 V	142	7.70	37.30

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ” : Fundamental frequency.
 6. The other emission levels were very low against the limit.

4.2.13 TEST RESULTS (C) -DSSS

EUT	Wireless LAN Mini PCI Card	MODEL	WLL3010
MODE	Channel 1	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 60 % RH, 1050 hPa	TESTED BY: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1608.00	40.5 PK	74.00	-33.50	1.52 H	84	8.90	31.60
2	*2412.00	104.4 PK			1.24 H	33	71.70	32.80
2	*2412.00	94.7 AV			1.24 H	33	62.00	31.60
3	3216.00	51.5 PK	74.00	-22.50	1.12 H	62	17.70	33.90
3	3216.00	48.2 AV	54.00	-5.80	1.12 H	62	14.30	32.80
4	4824.00	47.0 PK	74.00	-27.00	1.52 H	74	10.00	36.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1608.00	41.1 PK	74.00	-32.90	1.52 V	76	9.50	31.60
2	*2412.00	100.0 PK			1.22 V	285	67.30	32.80
2	*2412.00	94.5 AV			1.22 V	285	61.80	31.60
3	3216.00	48.8 PK	74.00	-25.20	1.15 V	274	14.90	33.90
4	4824.00	46.2 PK	74.00	-27.80	1.28 V	52	9.20	36.90

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “ : Fundamental frequency.
 6. The other emission levels were very low against the limit.

EUT	Wireless LAN Mini PCI Card	MODEL	WLL3010
MODE	Channel 6	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 60 % RH, 1050 hPa	TESTED BY: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1624.00	38.9 PK	74.00	-35.10	1.31 H	24	7.30	31.60
2	*2437.00	105.2 PK			1.77 H	155	72.40	32.80
2	*2437.00	98.5 AV			1.77 H	155	65.70	31.60
3	3249.00	49.4 PK	74.00	-24.60	1.27 H	13	15.60	33.90
4	4874.00	47.4 PK	74.00	-26.60	1.54 H	87	10.20	37.10

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1624.20	43.1 PK	74.00	-30.90	1.14 V	34	11.50	31.60
2	*2437.00	102.6 PK			1.29 V	81	69.80	32.80
2	*2437.00	90.2 AV			1.29 V	81	57.40	31.60
3	3248.00	49.5 PK	74.00	-24.50	1.40 V	52	15.60	33.90
4	4874.00	45.4 PK	74.00	-28.60	1.12 V	27	8.20	37.10

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ” : Fundamental frequency.
 6. The other emission levels were very low against the limit.

EUT	Wireless LAN Mini PCI Card	MODEL	WLL3010
MODE	Channel 11	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 60 % RH, 1050 hPa	TESTED BY: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1641.50	42.2 PK	74.00	-31.80	1.38 H	67	10.50	31.60
2	*2463.00	108.1 PK			1.14 H	303	75.20	32.90
2	*2463.00	99.2 AV			1.14 H	303	66.40	31.60
3	3282.00	51.3 PK	74.00	-22.70	1.24 H	147	17.40	33.90
3	3282.00	47.8 AV	54.00	-6.20	1.24 H	147	13.90	32.90
4	4924.00	47.4 PK	74.00	-26.60	1.37 H	85	10.00	37.30

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1641.50	41.4 PK	74.00	-32.60	1.52 V	66	9.70	31.60
2	*2463.00	101.4 PK			1.43 V	57	68.60	32.90
2	*2463.00	93.1 AV			1.43 V	57	60.30	31.60
3	3282.00	49.2 PK	74.00	-24.80	1.28 V	61	15.30	33.90
4	4924.00	46.1 PK	74.00	-27.90	1.16 V	82	8.70	37.30

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ” : Fundamental frequency.
 6. The other emission levels were very low against the limit.

4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	July 24, 2003

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 kHz RBW and 100 kHz VBW. The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP



For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.


4.3.7 TEST RESULTS -OFDM

EUT	Wireless LAN Mini PCI Card	MODEL	WLL3010
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	21deg. C, 67%RH, 1005 hPa
TESTED BY: Ansen Lei			


CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	16.593	0.5	PASS
6	2437	16.553	0.5	PASS
11	2462	16.513	0.5	PASS

Delta 1 [T1]
 Ref Lvl 20.8 dBm
 -1.27 dB
 16.59318637 MHz
 RBW 100 kHz
 VBW 100 kHz
 SWT 5 ms
 RF Att Unit dBm
 30 dB
 1MA
 0.8 dB Offset
 D1 -6.27 dBm
 INTER -12.27 dBm
 F1
 F2
 Center 2.412 GHz
 Span 20 MHz
 2 MHz

CH6

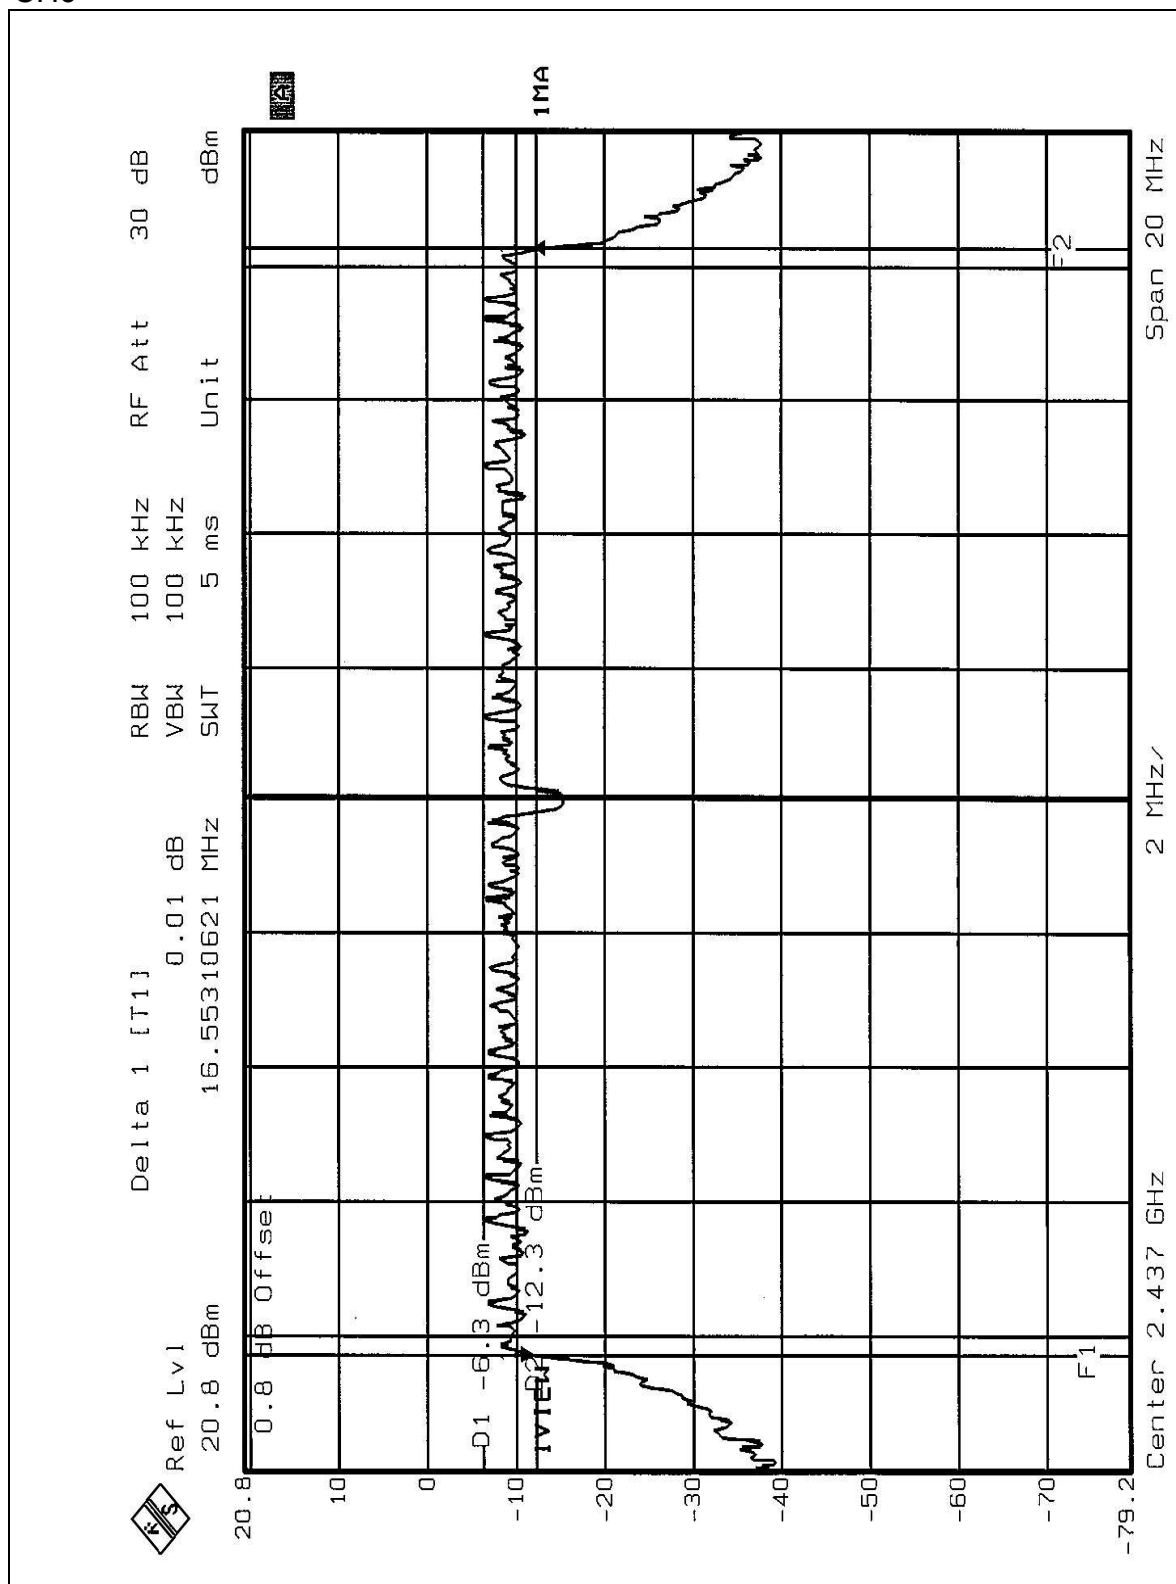

CH11

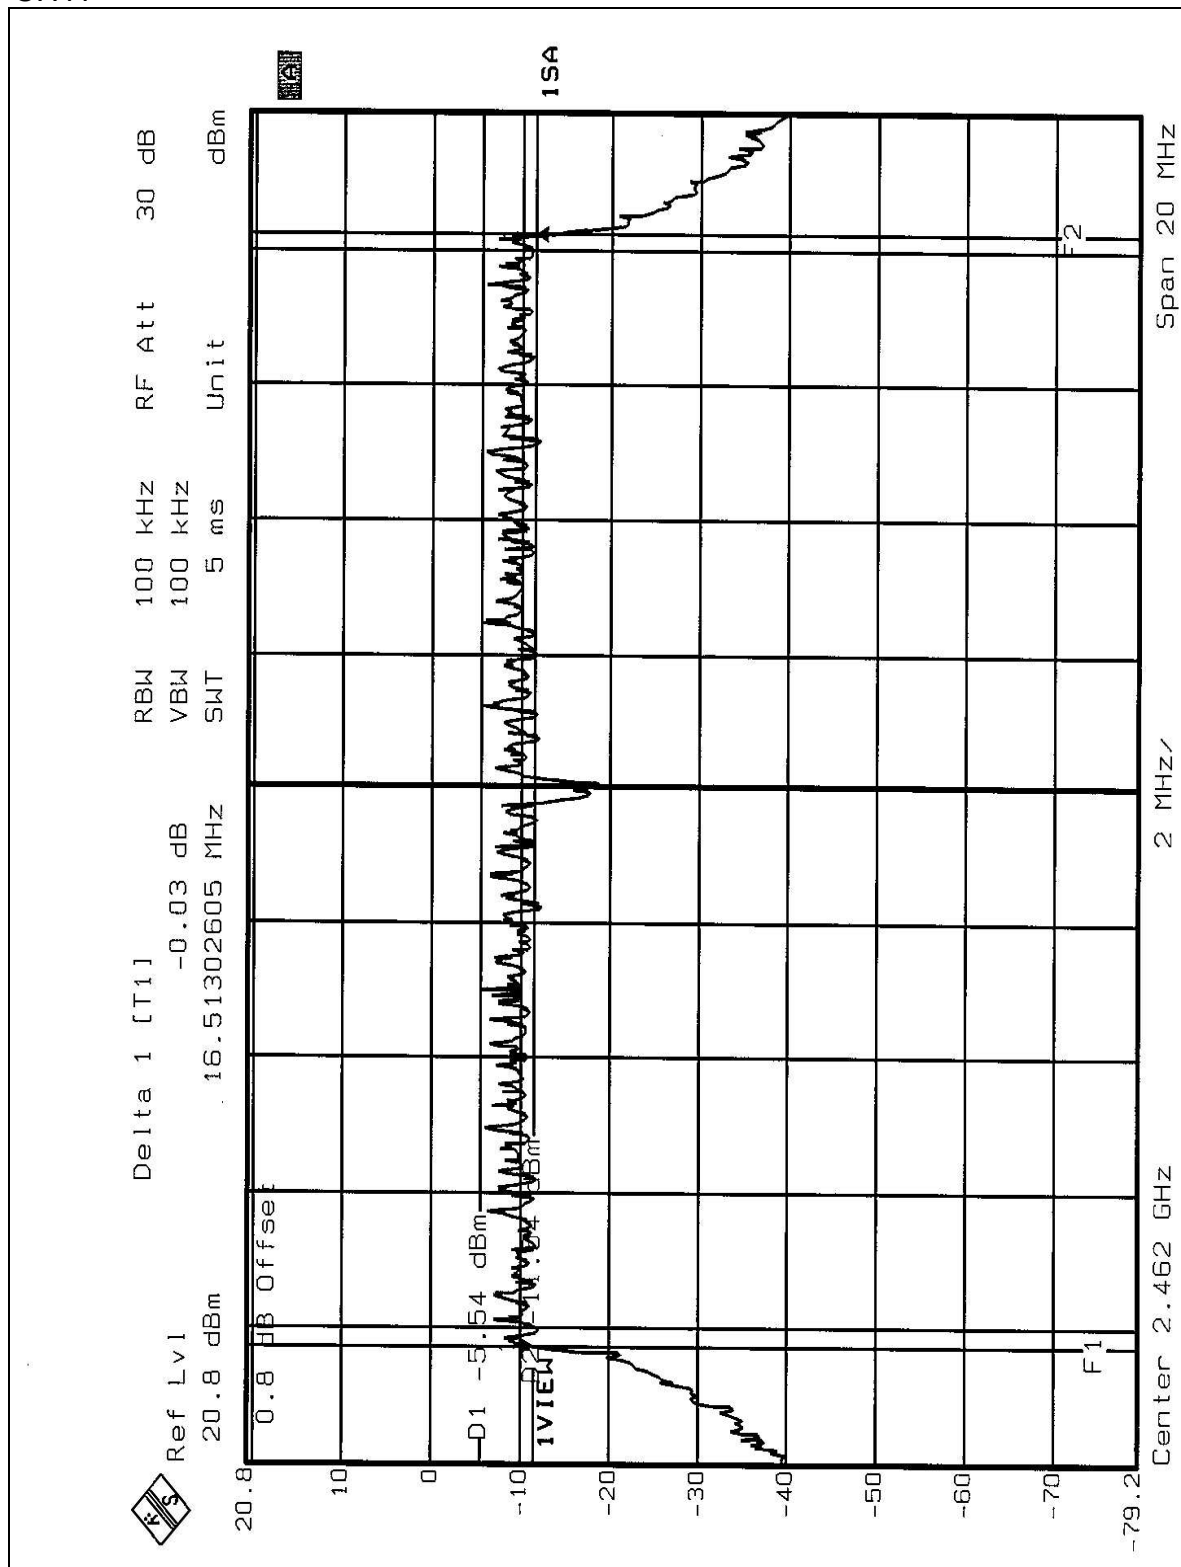


4.3.8 TEST RESULTS -DSSS


EUT	Wireless LAN Mini PCI Card	MODEL	WLL3010
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	21deg. C, 67%RH, 1005 hPa
TESTED BY: Ansen Lei			

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	11.623	0.5	PASS
6	2437	10.862	0.5	PASS
11	2462	11.503	0.5	PASS


CH1

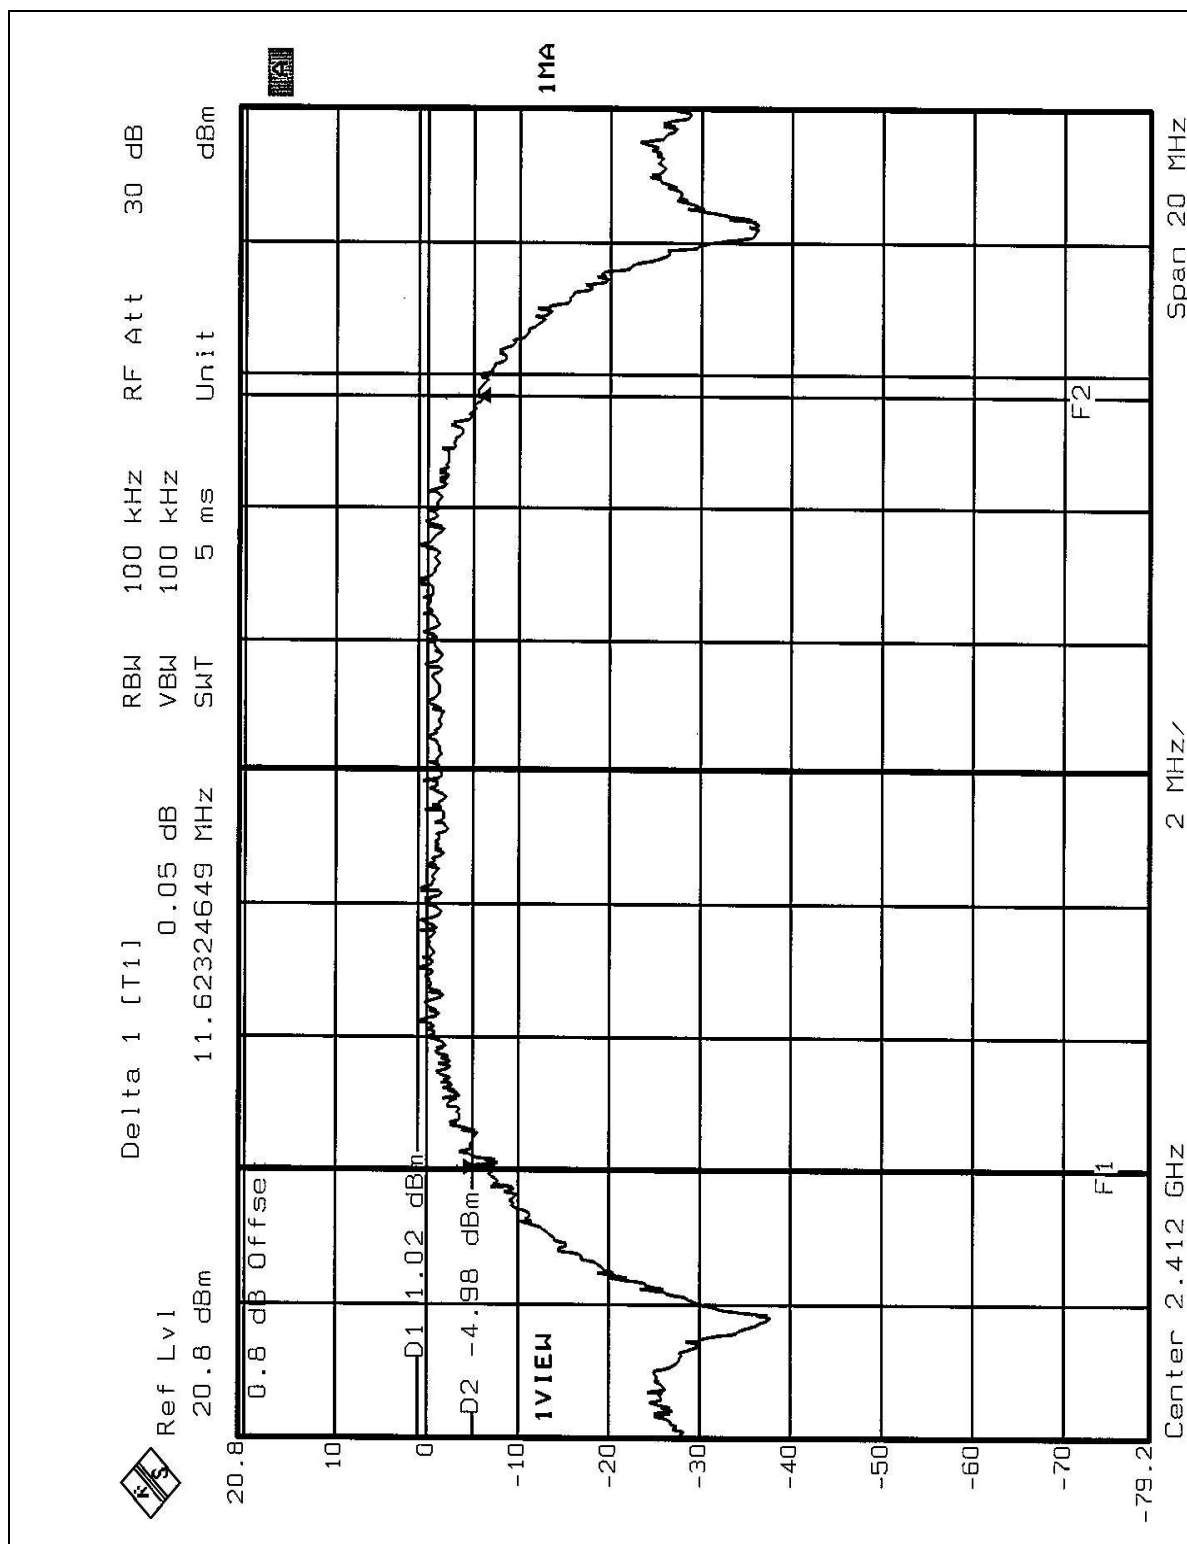

CH6

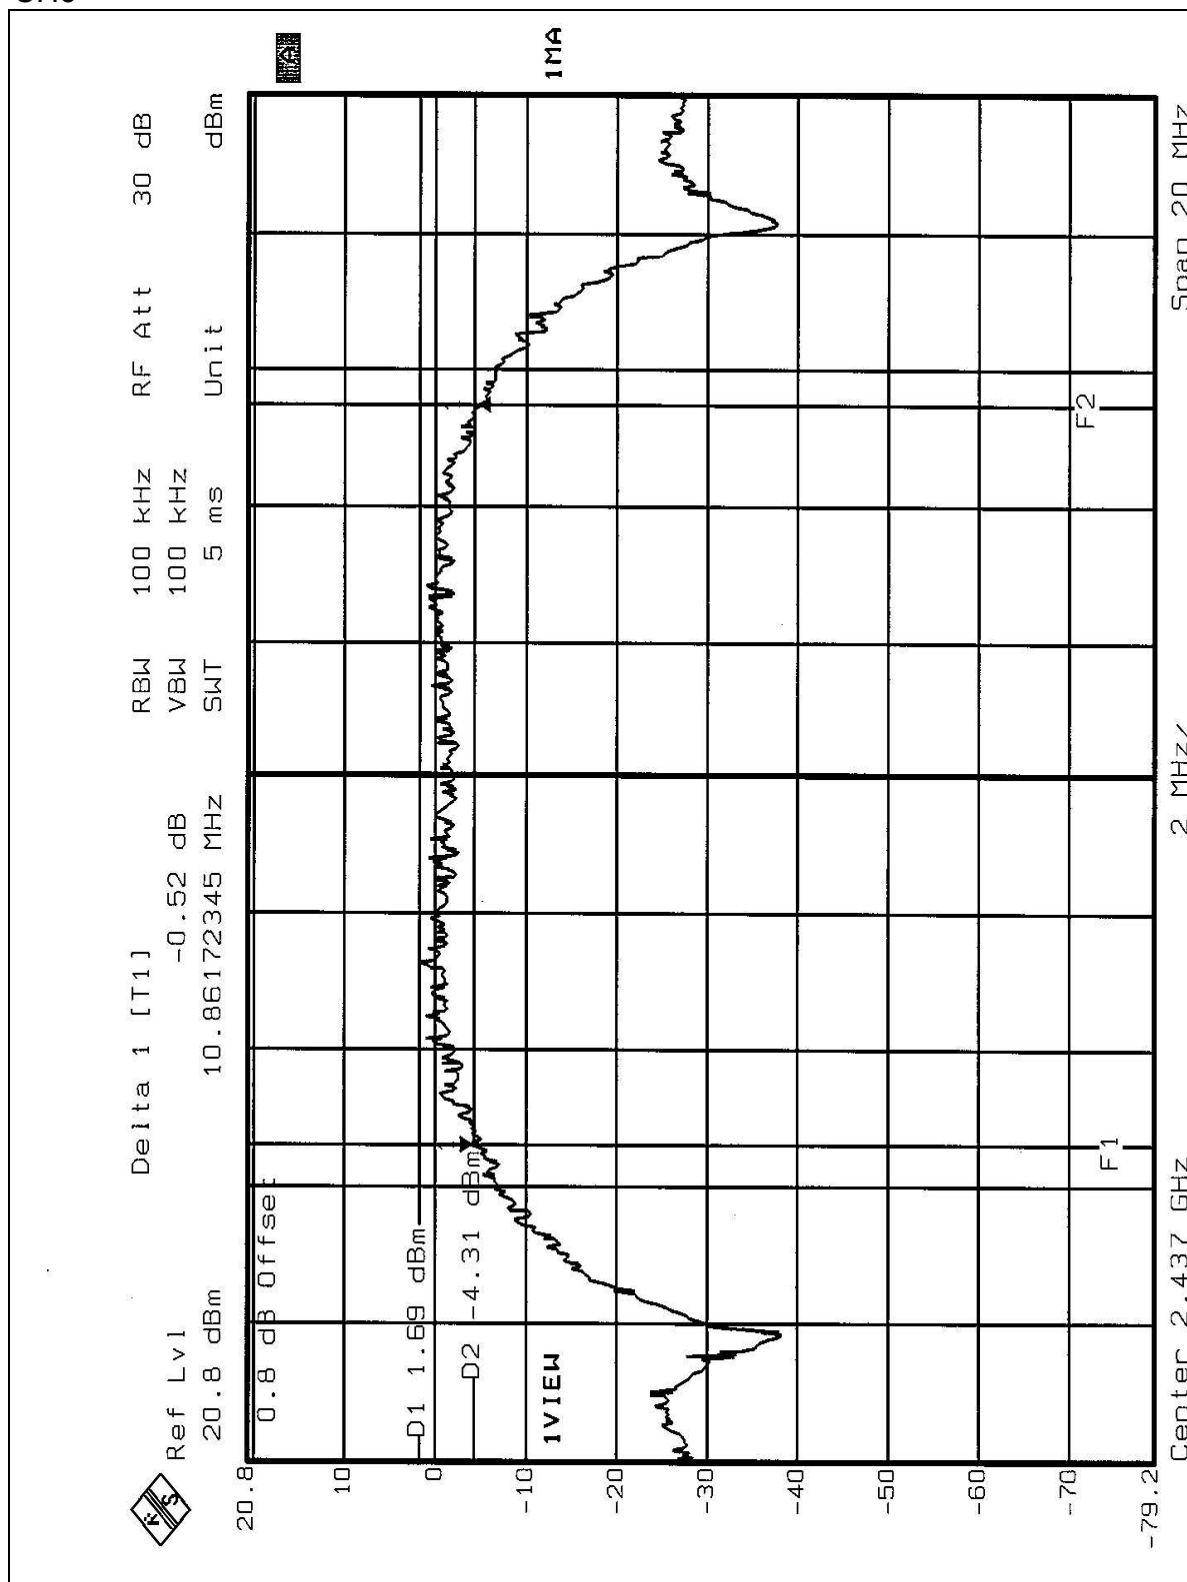

CH11

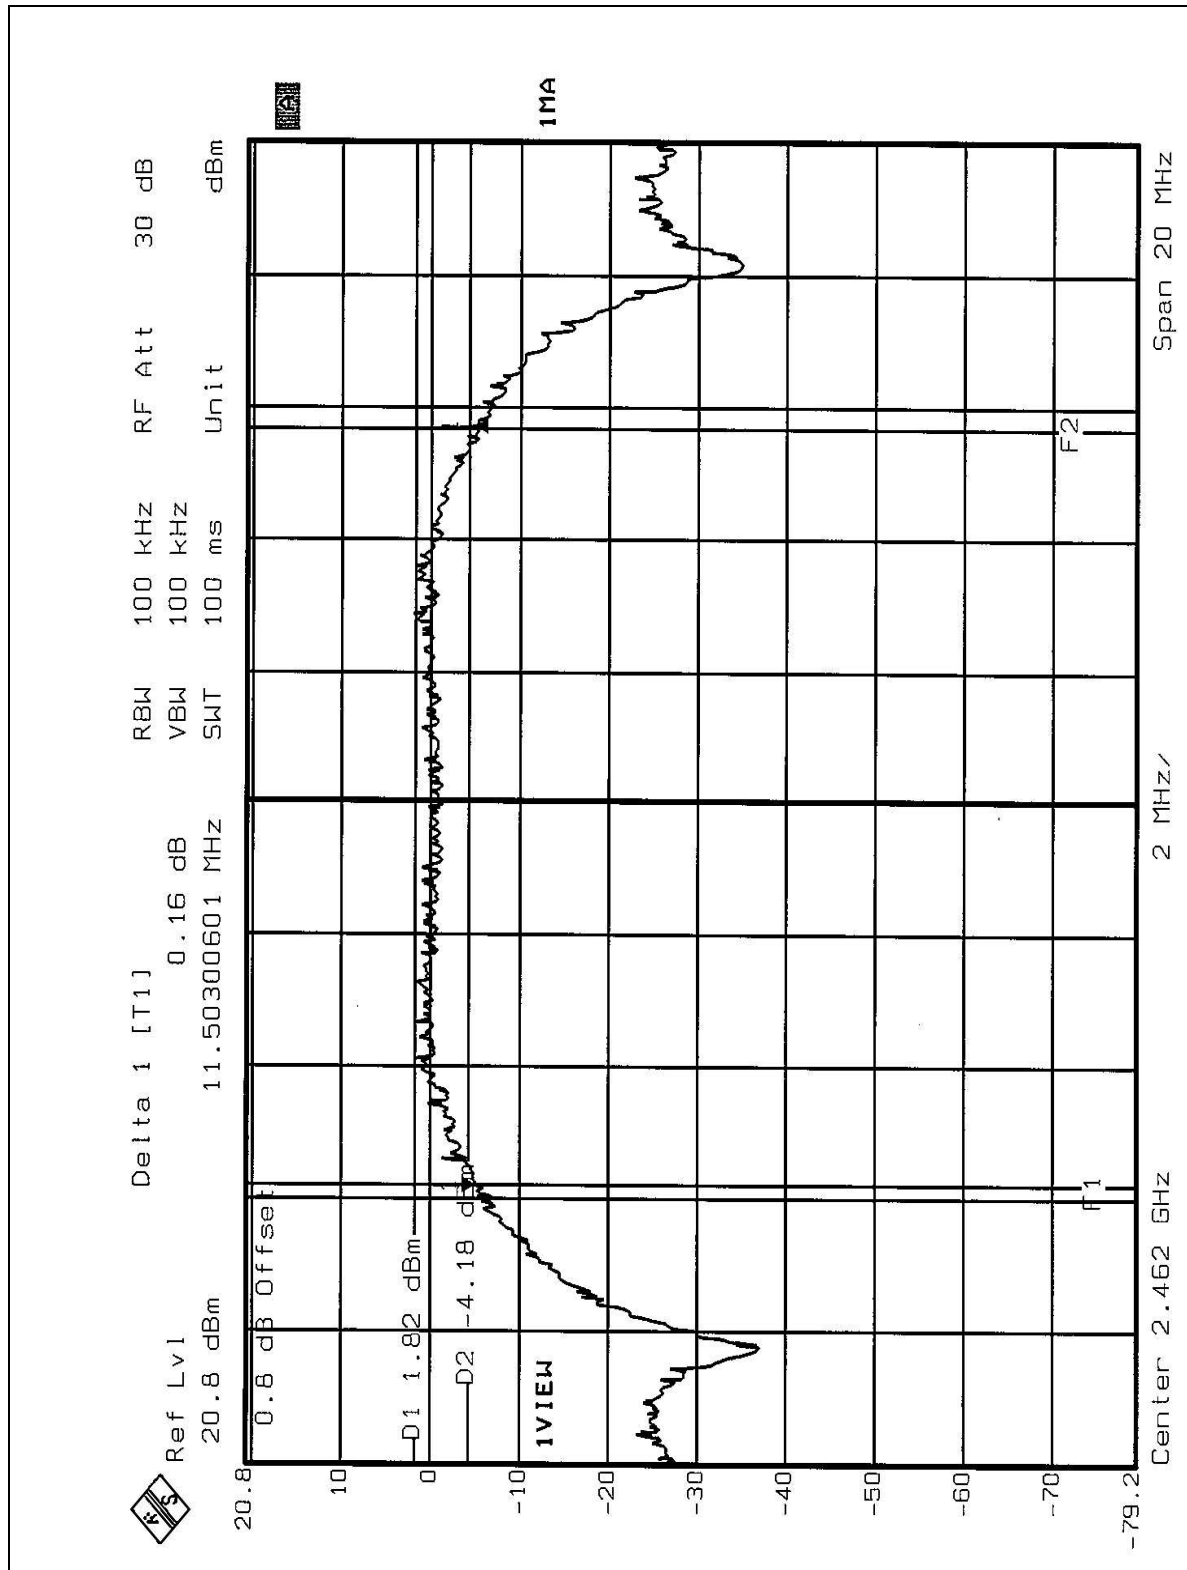

4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
POWER METER	E4416A	GB41291118	July 30, 2003
PEAK POWER SENSOR	E9327A	US40440722	July 30, 2003

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.4.3 TEST PROCEDURES

The transmitter output was connected to the peak power meter.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP



4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6

4.4.7 TEST RESULTS -OFDM

EUT	Wireless LAN Mini PCI Card	MODEL	WLL3010
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	21deg. C, 67%RH, 1005 hPa
TESTED BY: Ansen Lei			

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	14.23	30	PASS
6	2437	14.37	30	PASS
11	2462	14.89	30	PASS

4.4.8 TEST RESULTS -DSSS

EUT	Wireless LAN Mini PCI Card	MODEL	WLL3010
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	21deg. C, 67%RH, 1005 hPa
TESTED BY: Ansen Lei			

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	14.46	30	PASS
6	2437	14.89	30	PASS
11	2462	14.96	30	PASS

4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	July 24, 2003

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3 kHz RBW and 30 kHz VBW, set sweep time=span/3kHz. The power spectral density was measured and recorded. The sweep time is allowed to be longer than span/3KHz for a full response of the mixer in the spectrum analyzer.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP



4.5.6 EUT OPERATING CONDITIONS


Same as 4.3.6

4.5.7 TEST RESULTS -OFDM

EUT	Wireless LAN Mini PCI Card	MODEL	WLL3010
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	21deg. C, 67%RH, 1005 hPa
TESTED BY: Ansen Lei			


CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 KHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-19.83	8	PASS
6	2437	-19.95	8	PASS
11	2462	-19.85	8	PASS

CH1

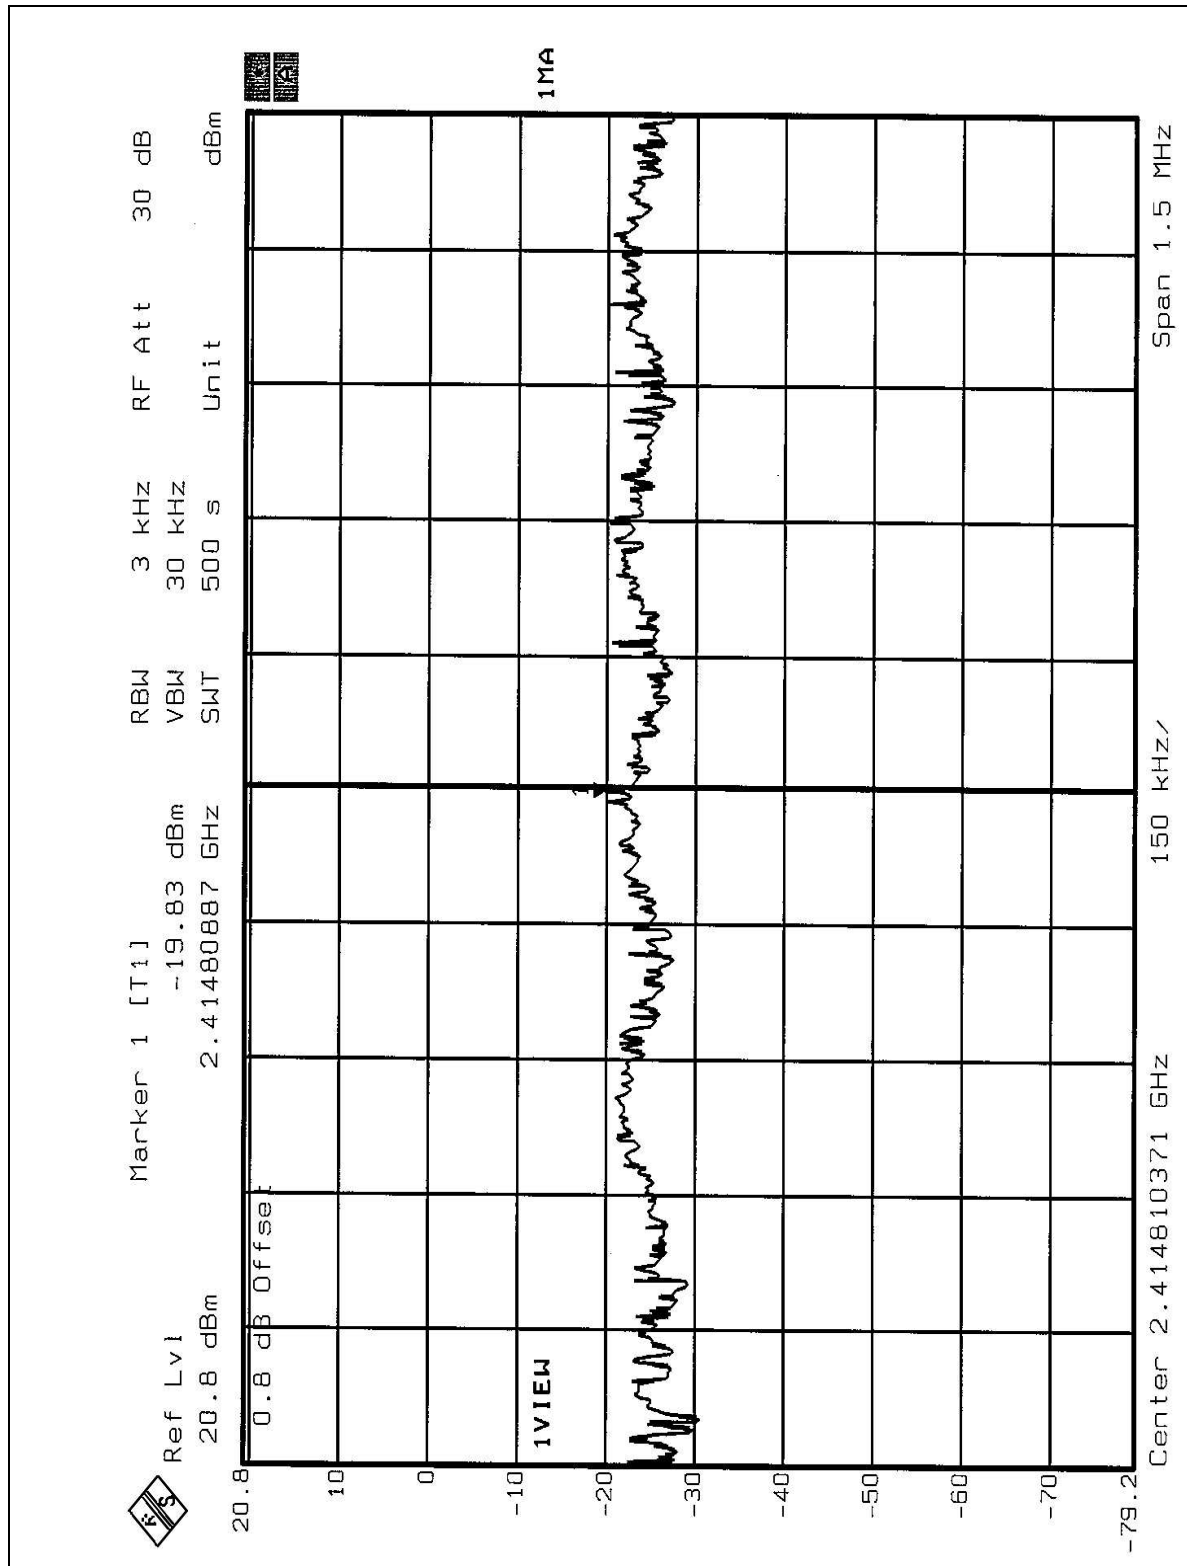




CH6

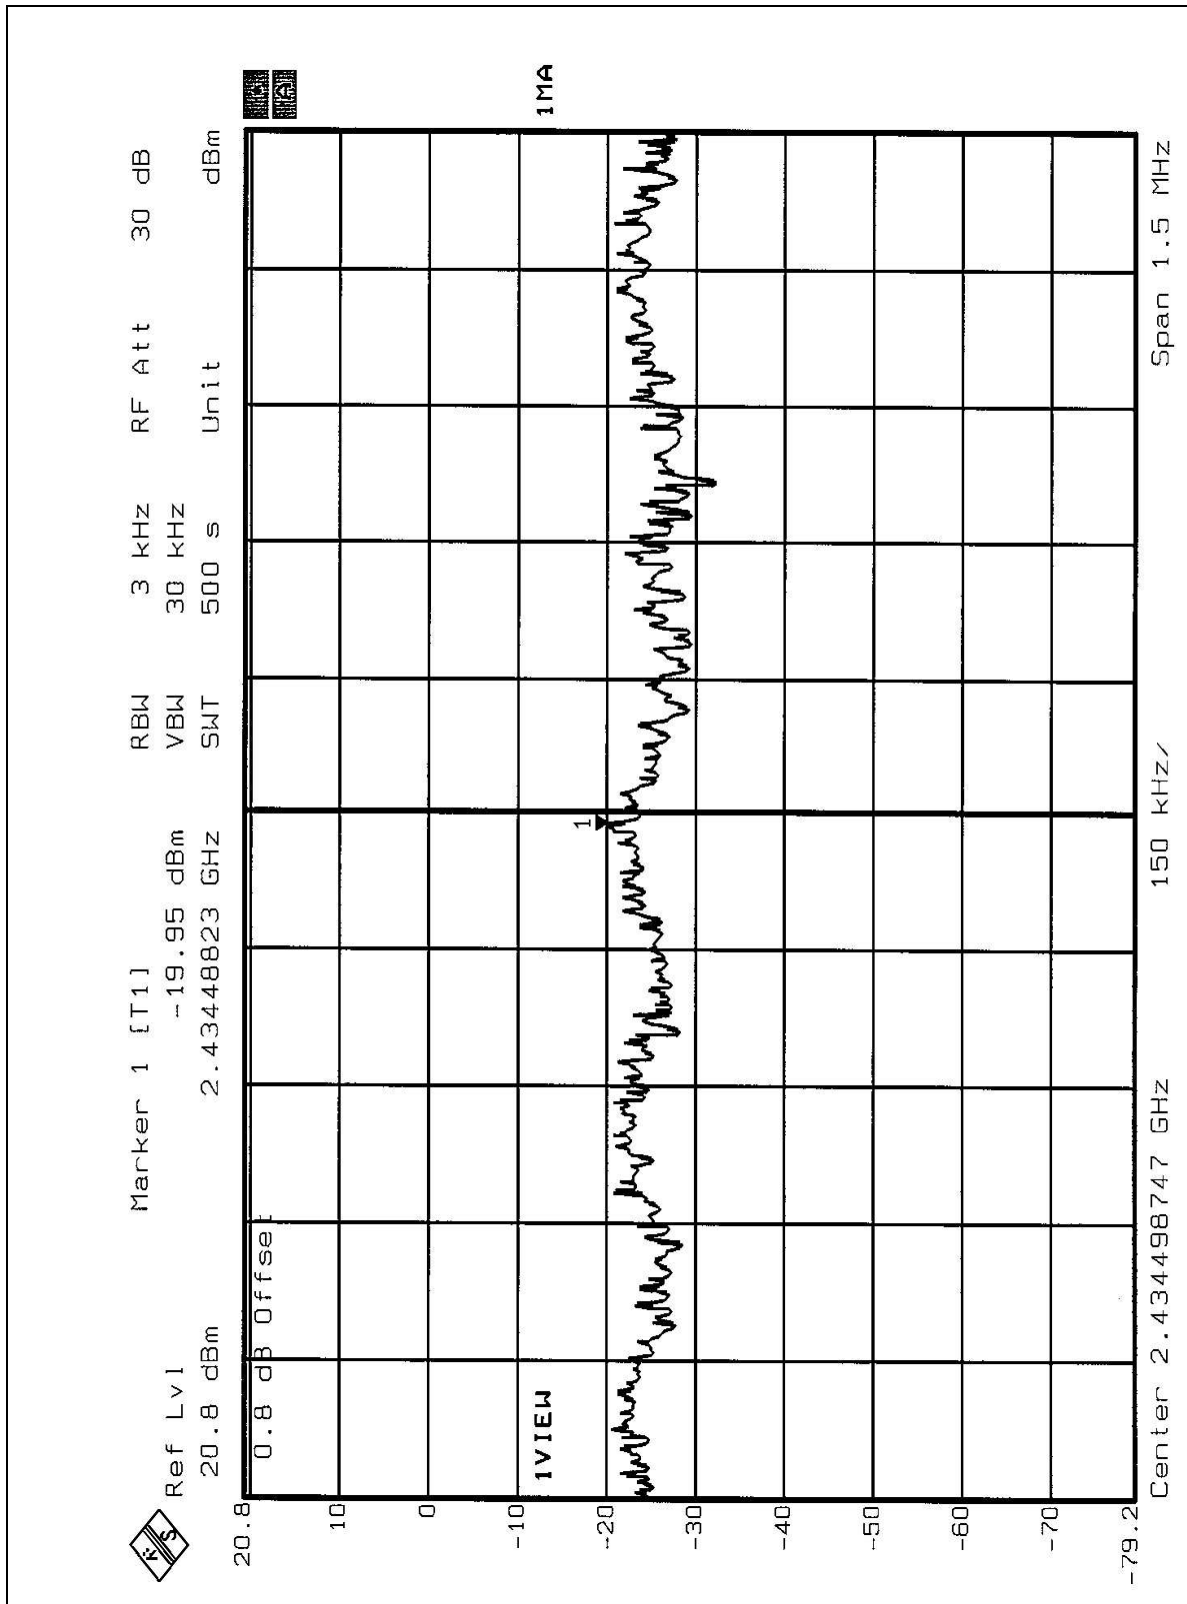

CH11

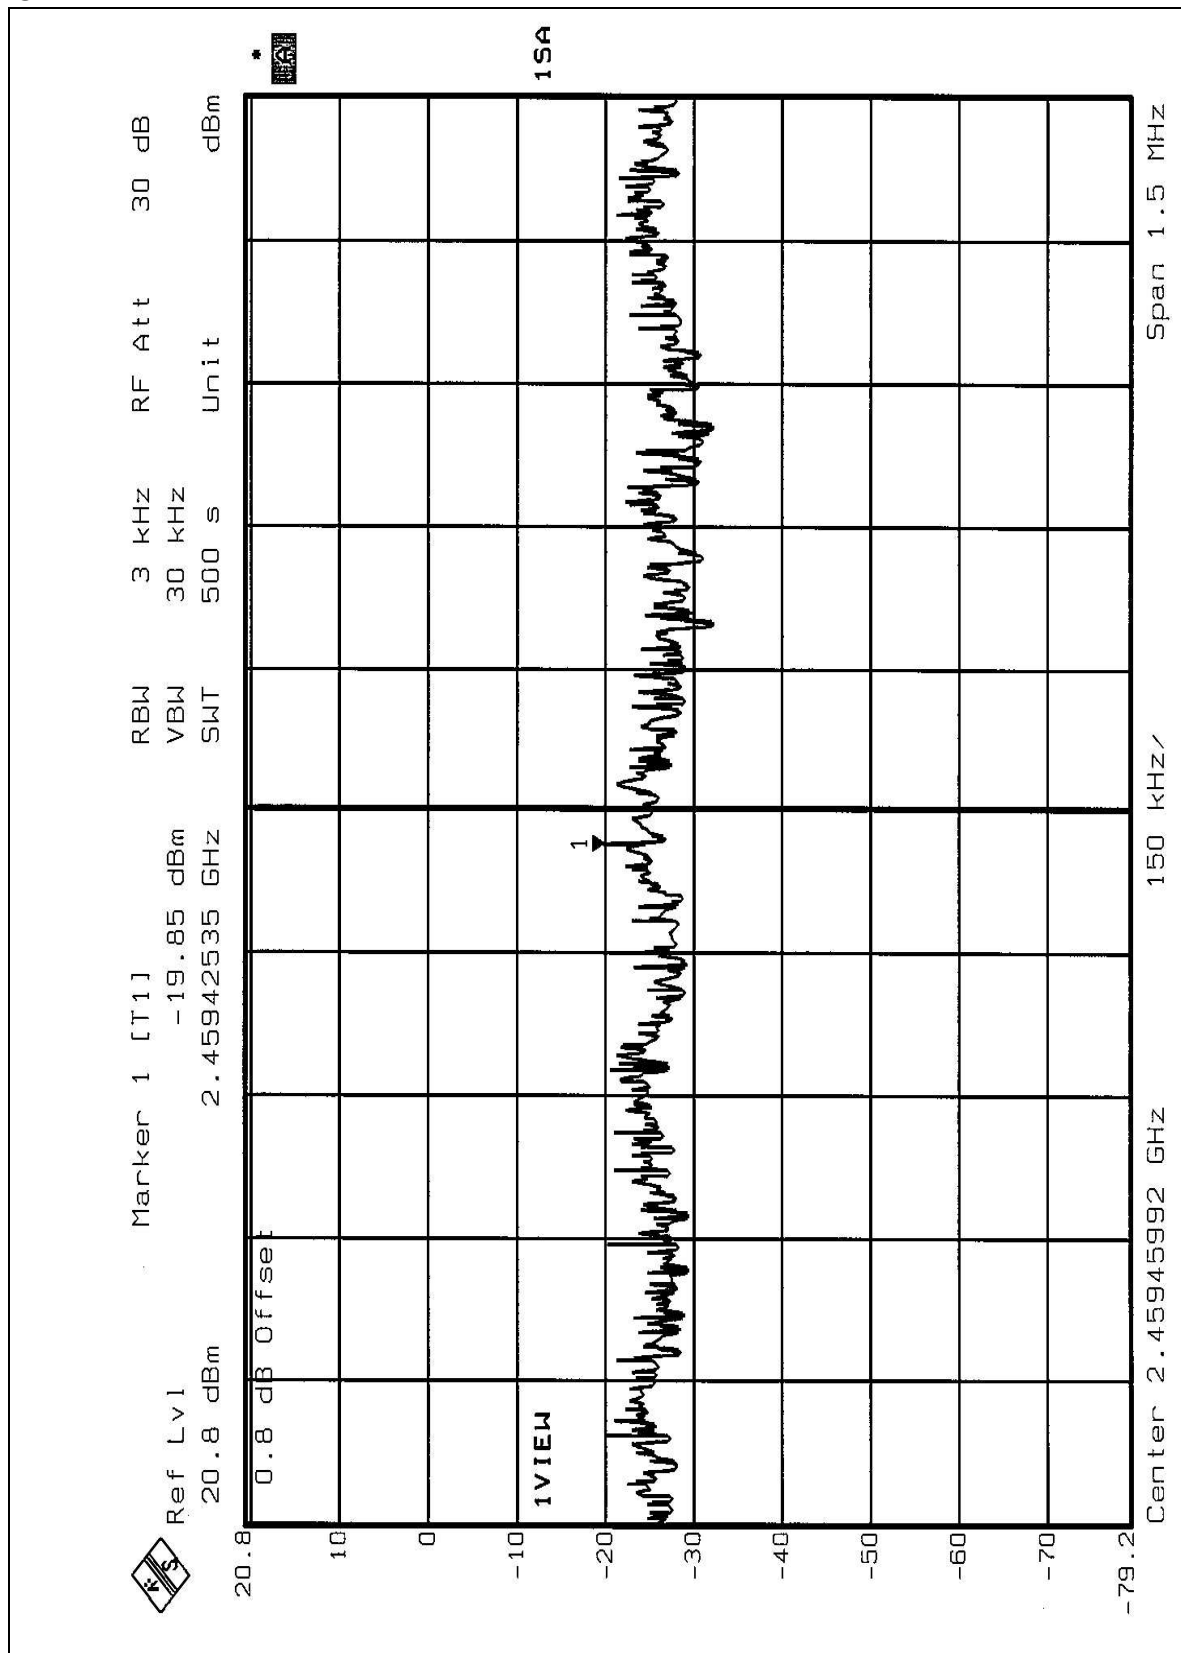


4.5.8 TEST RESULTS -DSSS


EUT	Wireless LAN Mini PCI Card	MODEL	WLL3010
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	21deg. C, 67%RH, 1005 hPa
TESTED BY: Ansen Lei			

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 KHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-12.98	8	PASS
6	2437	-12.06	8	PASS
11	2462	-12.61	8	PASS


CH1

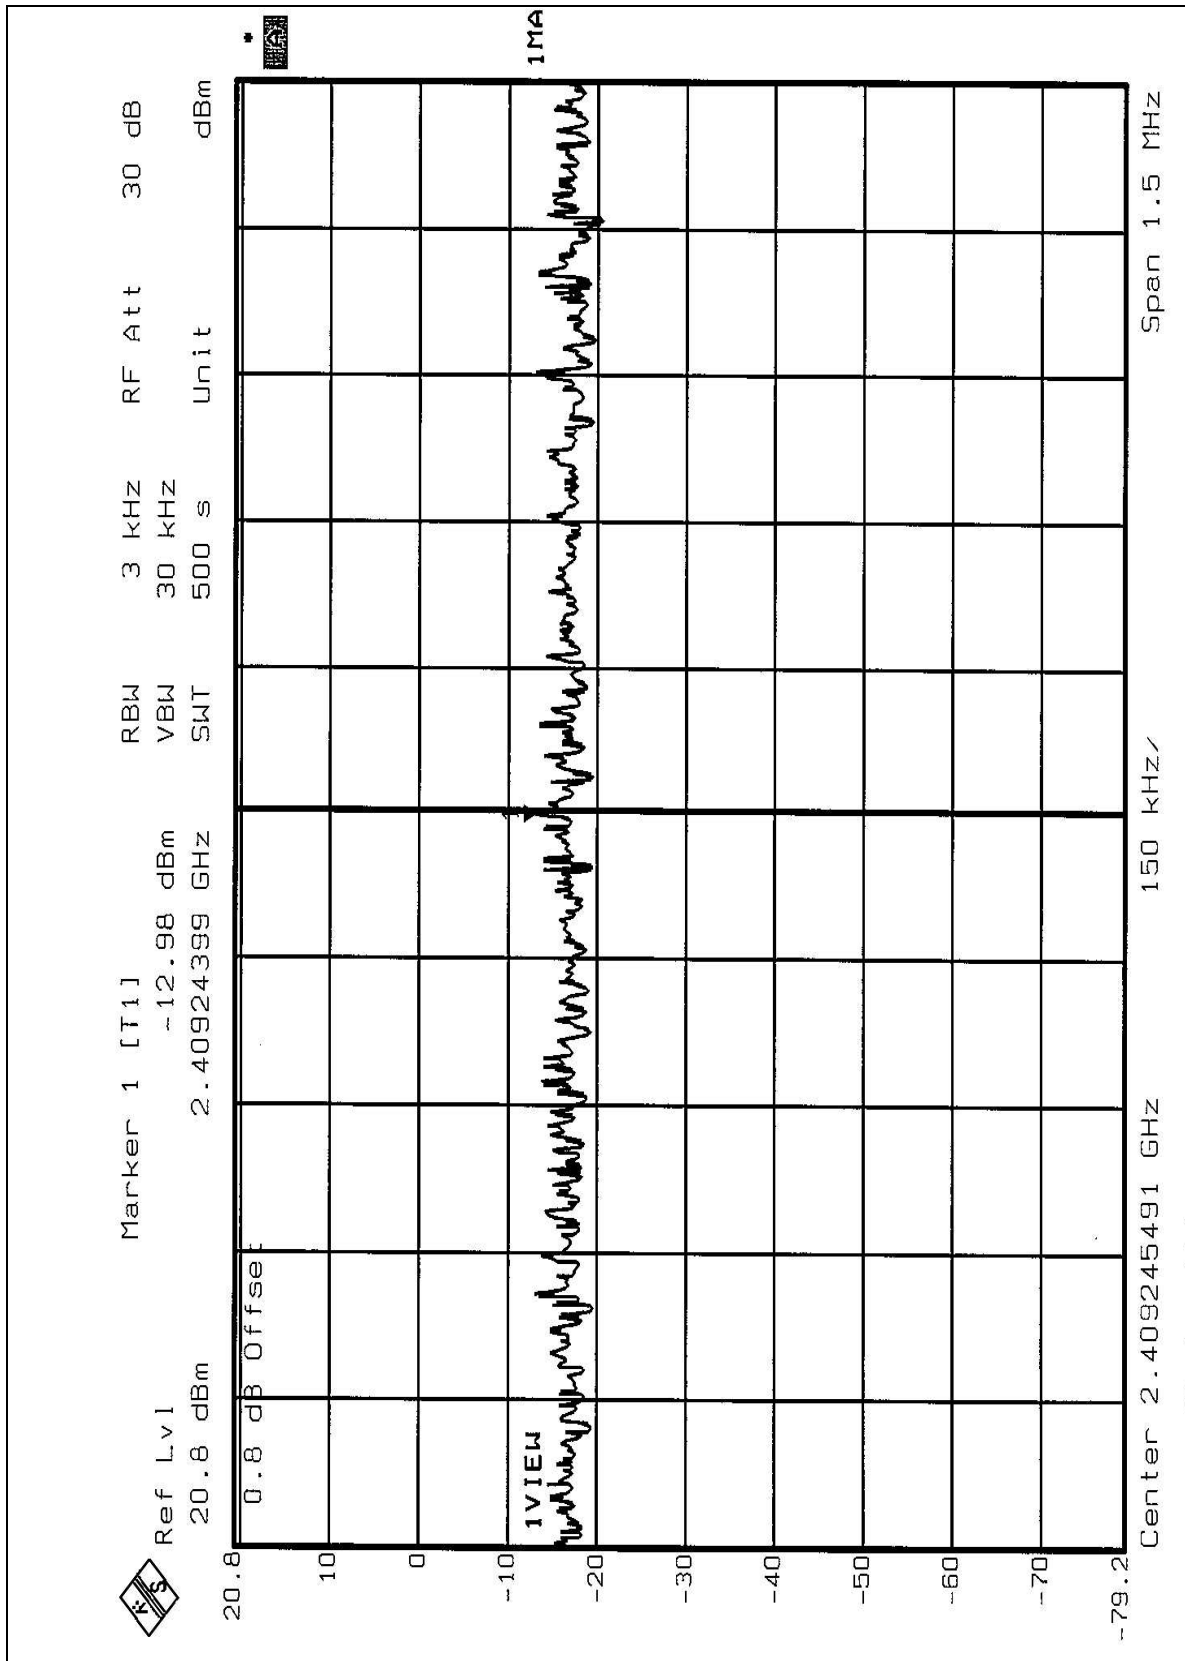

CH6

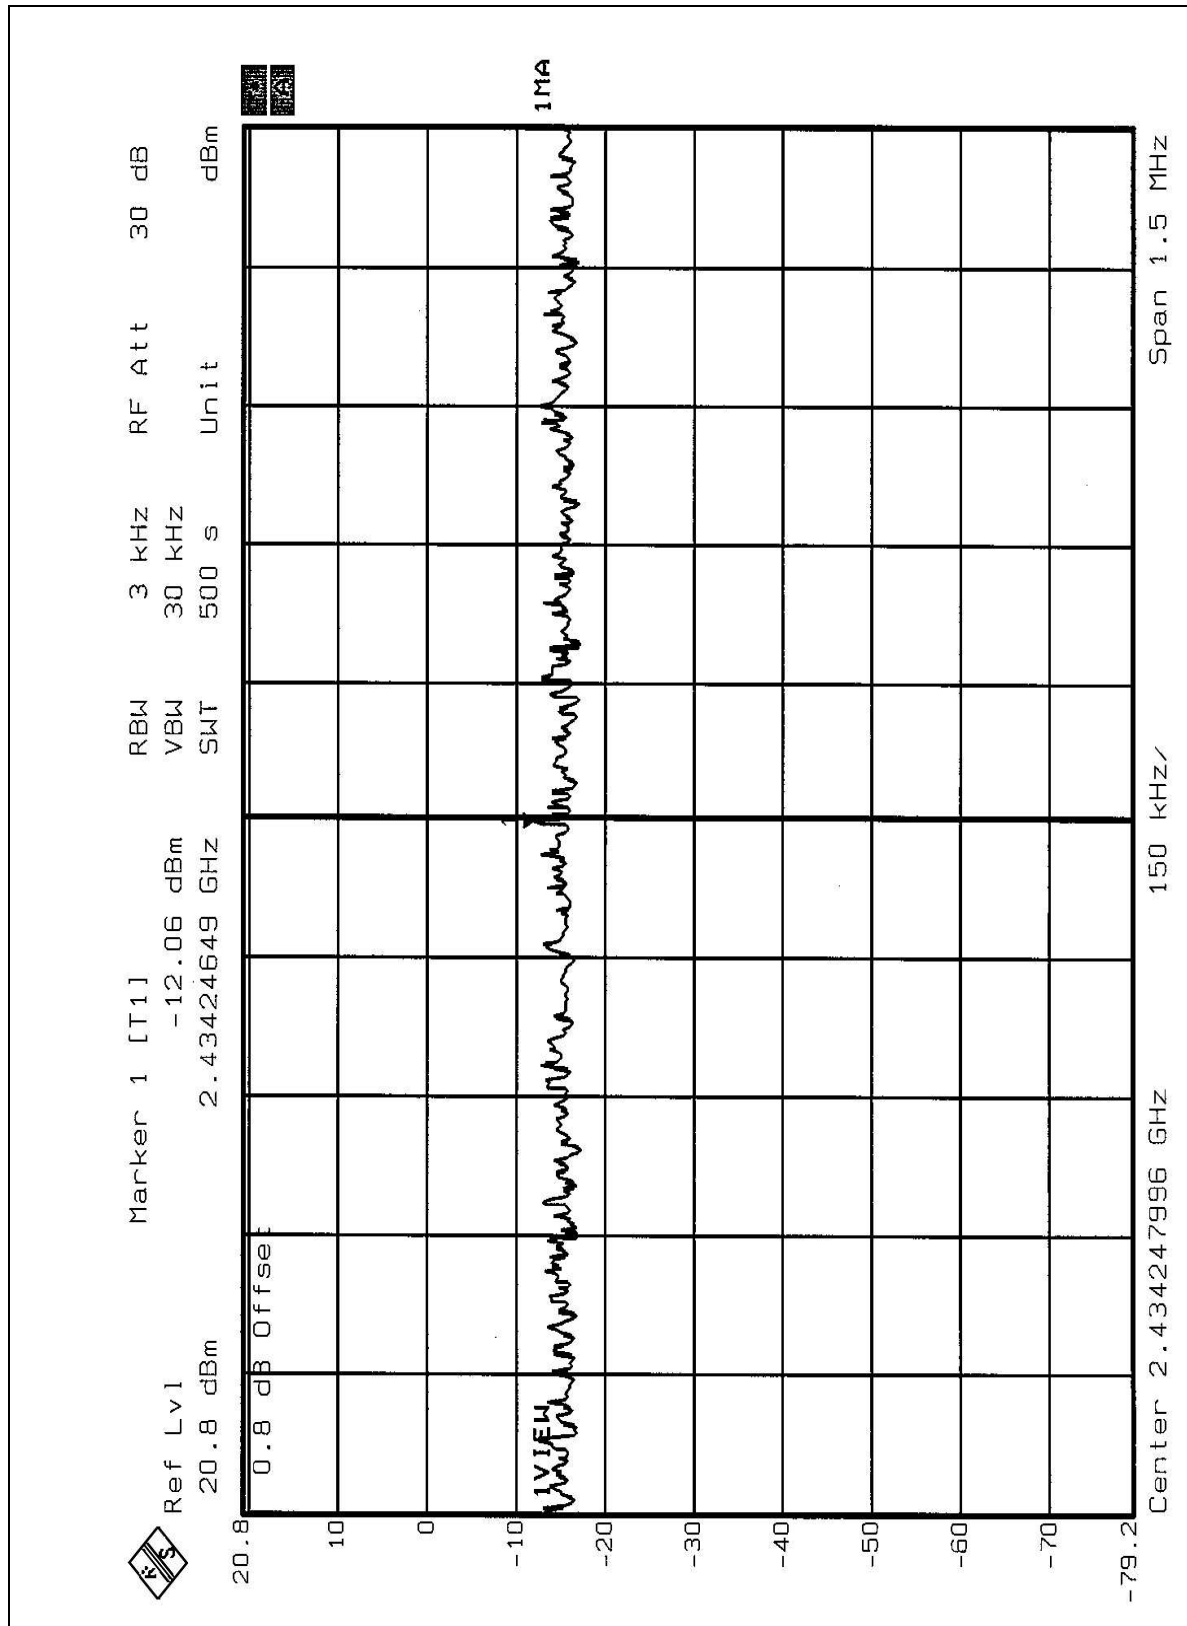

CH11

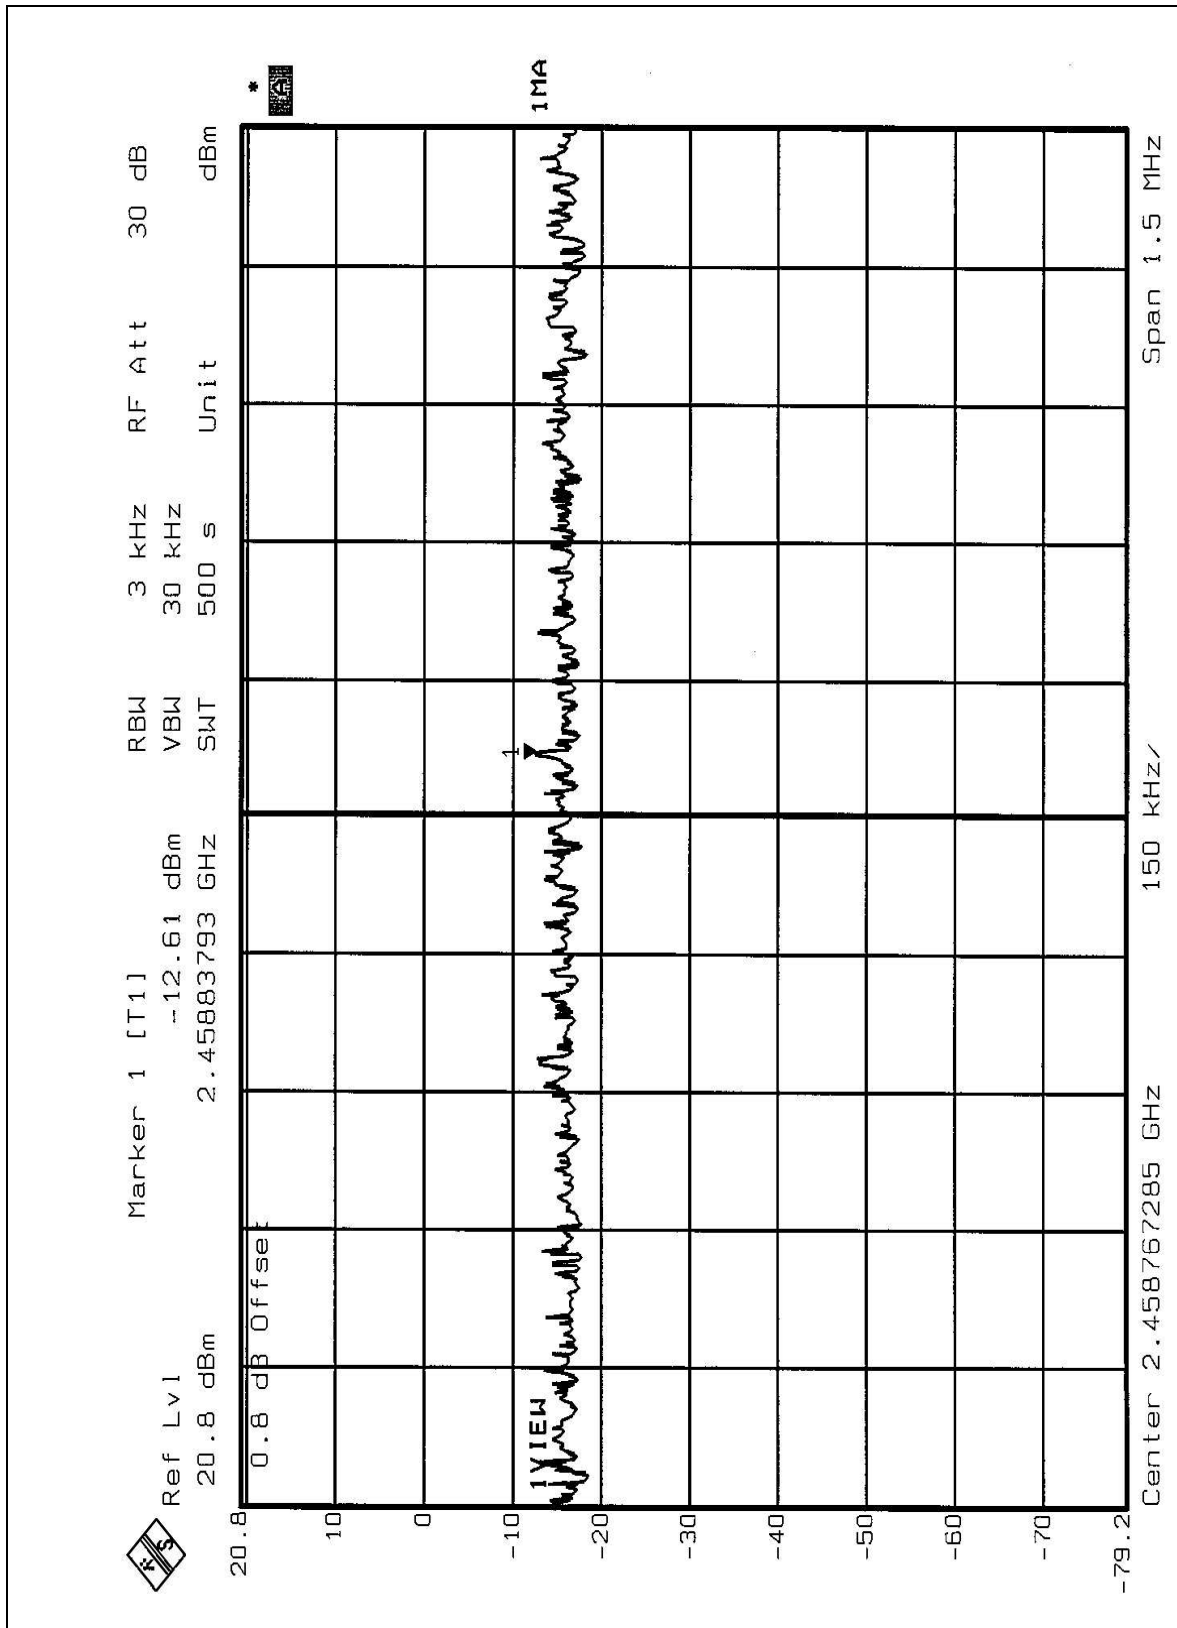

4.6 BAND EDGES MEASUREMENT

4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100KHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	July 24, 2003

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100 kHz with suitable frequency span including 100 kHz bandwidth from band edge. The band edges was measured and recorded.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation



4.6.5 EUT OPERATING CONDITION


Same as Item 4.3.6


4.6.6 TEST RESULTS -OFDM

The spectrum plots are attached on the following 2 pages. D2 line indicates the highest level, D1 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.247(C).

NOTE (1): The band edge emission plot on the following first page shows 57.87dB delta between carrier maximum power and local maximum emission in restrict band (2.3881GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.8 is 90.0dBuV/m, so the maximum field strength in restrict band is $90.0 - 57.87 = 32.13$ dBuV/m which is under 54 dBuV/m limit.

NOTE (2): The band edge emission plot on the following second page shows 57.05dB delta between carrier maximum power and local maximum emission in restrict band (2.4836GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.8 is 90.2dBuV/m, so the maximum field strength in restrict band is $90.2 - 57.05 = 33.15$ dBuV/m which is under 54 dBuV/m limit.

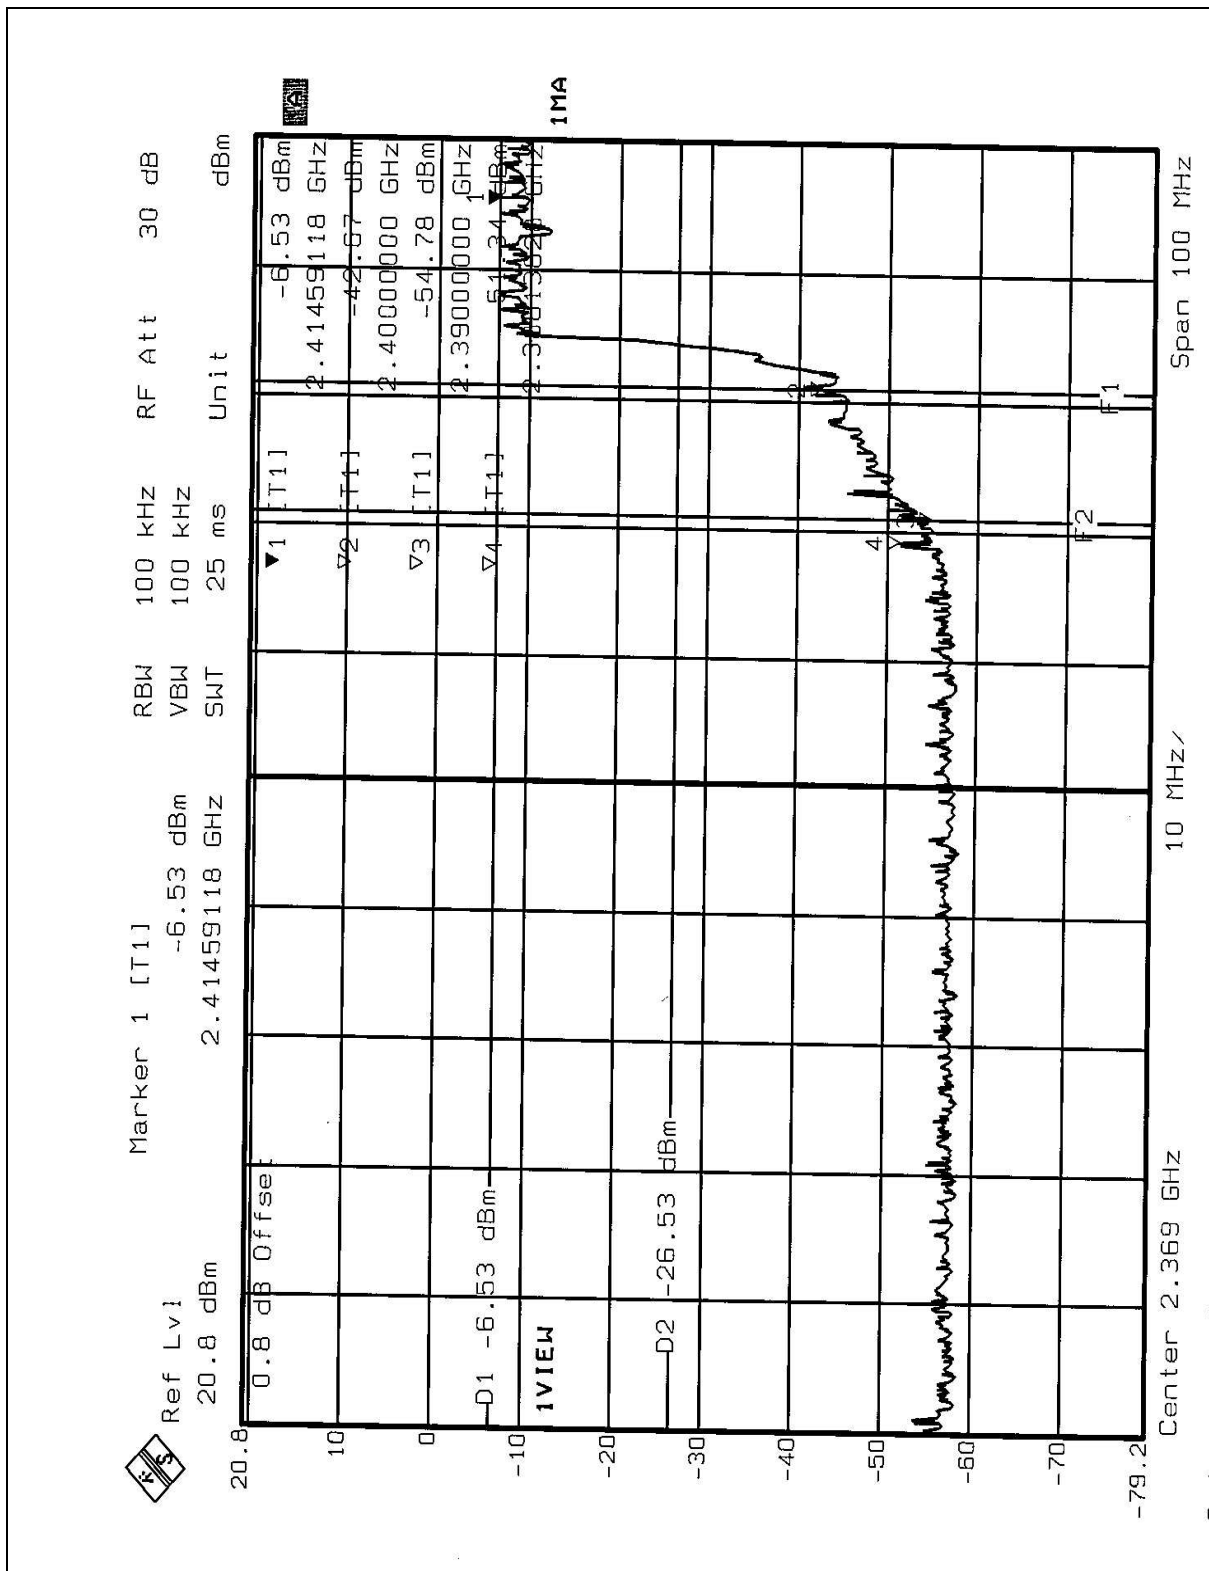

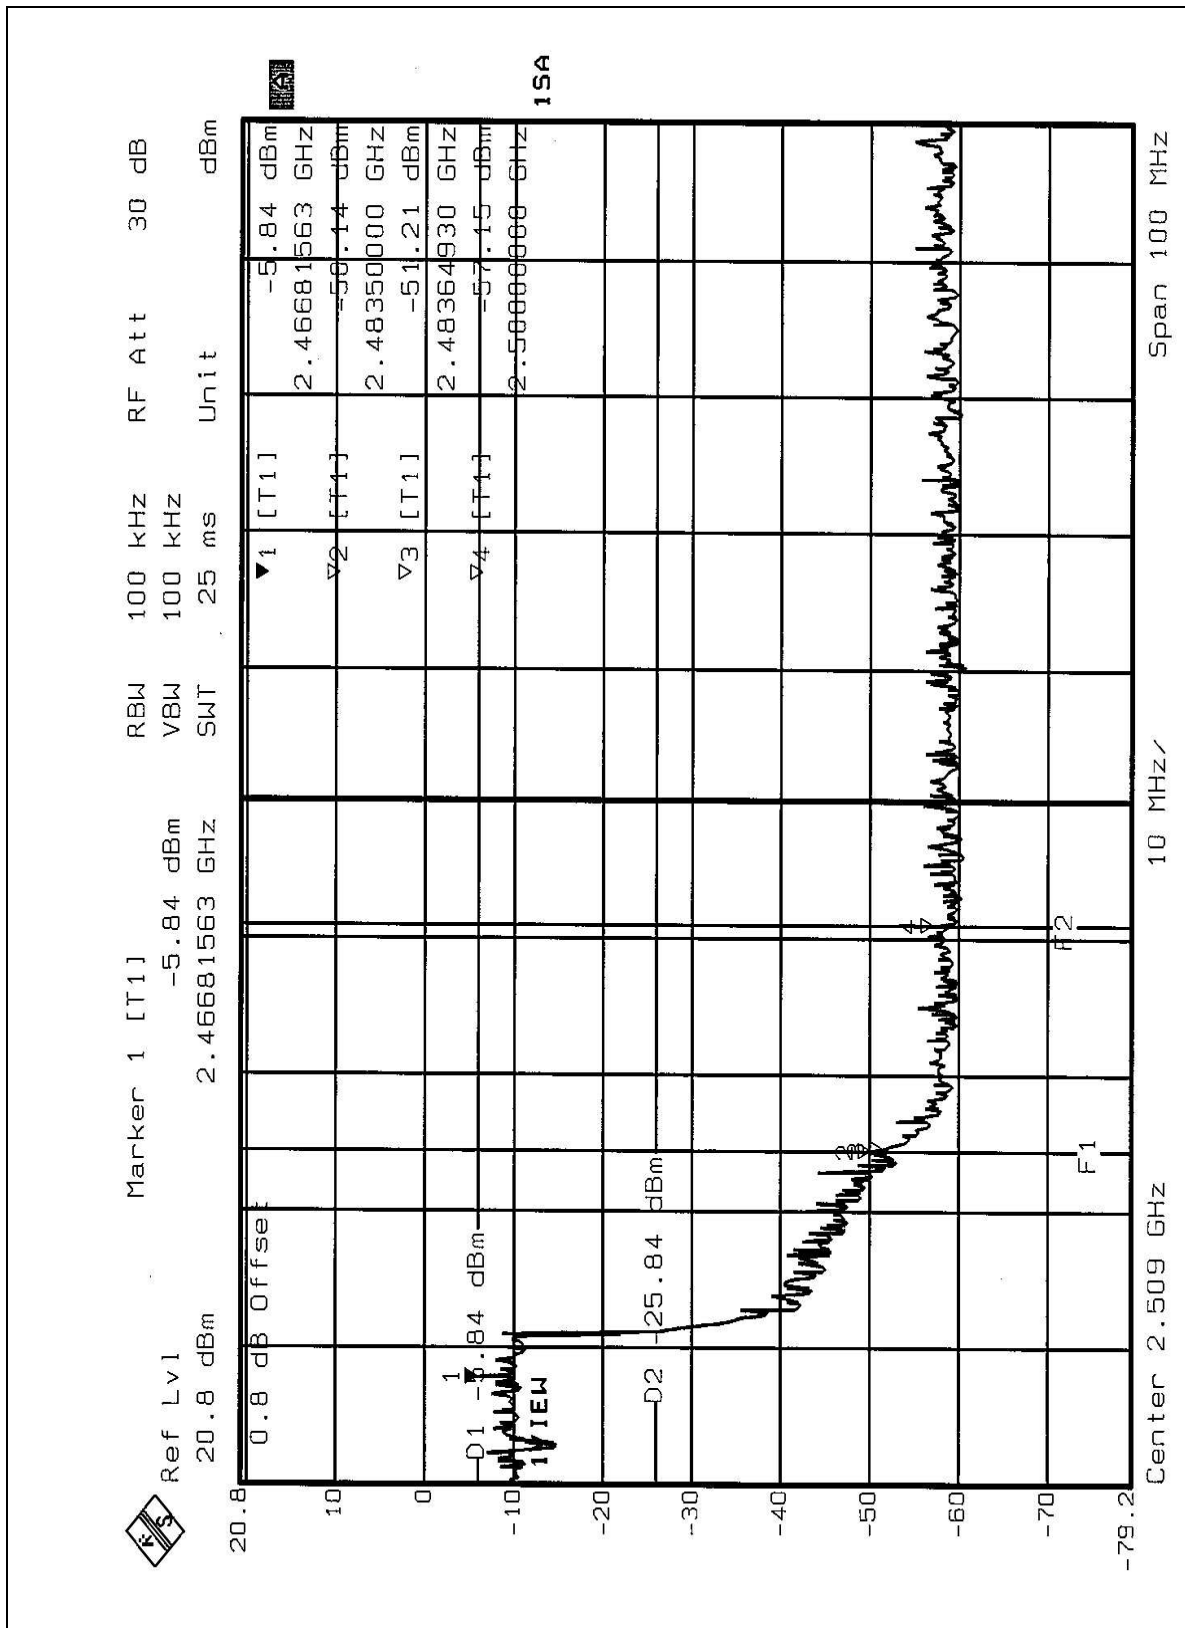





4.6.7 TEST RESULTS -DSSS

The spectrum plots are attached on the following 2 pages. D2 line indicates the highest level, D1 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.247(C).

NOTE (1): The band edge emission plot on the following first page shows 47.10dB delta between carrier maximum power and local maximum emission in restrict band (2.3885GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.9 is 96.6dBuV/m, so the maximum field strength in restrict band is $96.6 - 47.10 = 49.50$ dBuV/m which is under 54 dBuV/m limit.

NOTE (2): The band edge emission plot on the following second page shows 46.61dB delta between carrier maximum power and local maximum emission in restrict band (2.4855GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.11 is 100dBuV/m, so the maximum field strength in restrict band is $100 - 46.61 = 53.39$ dBuV/m which is under 54 dBuV/m limit.

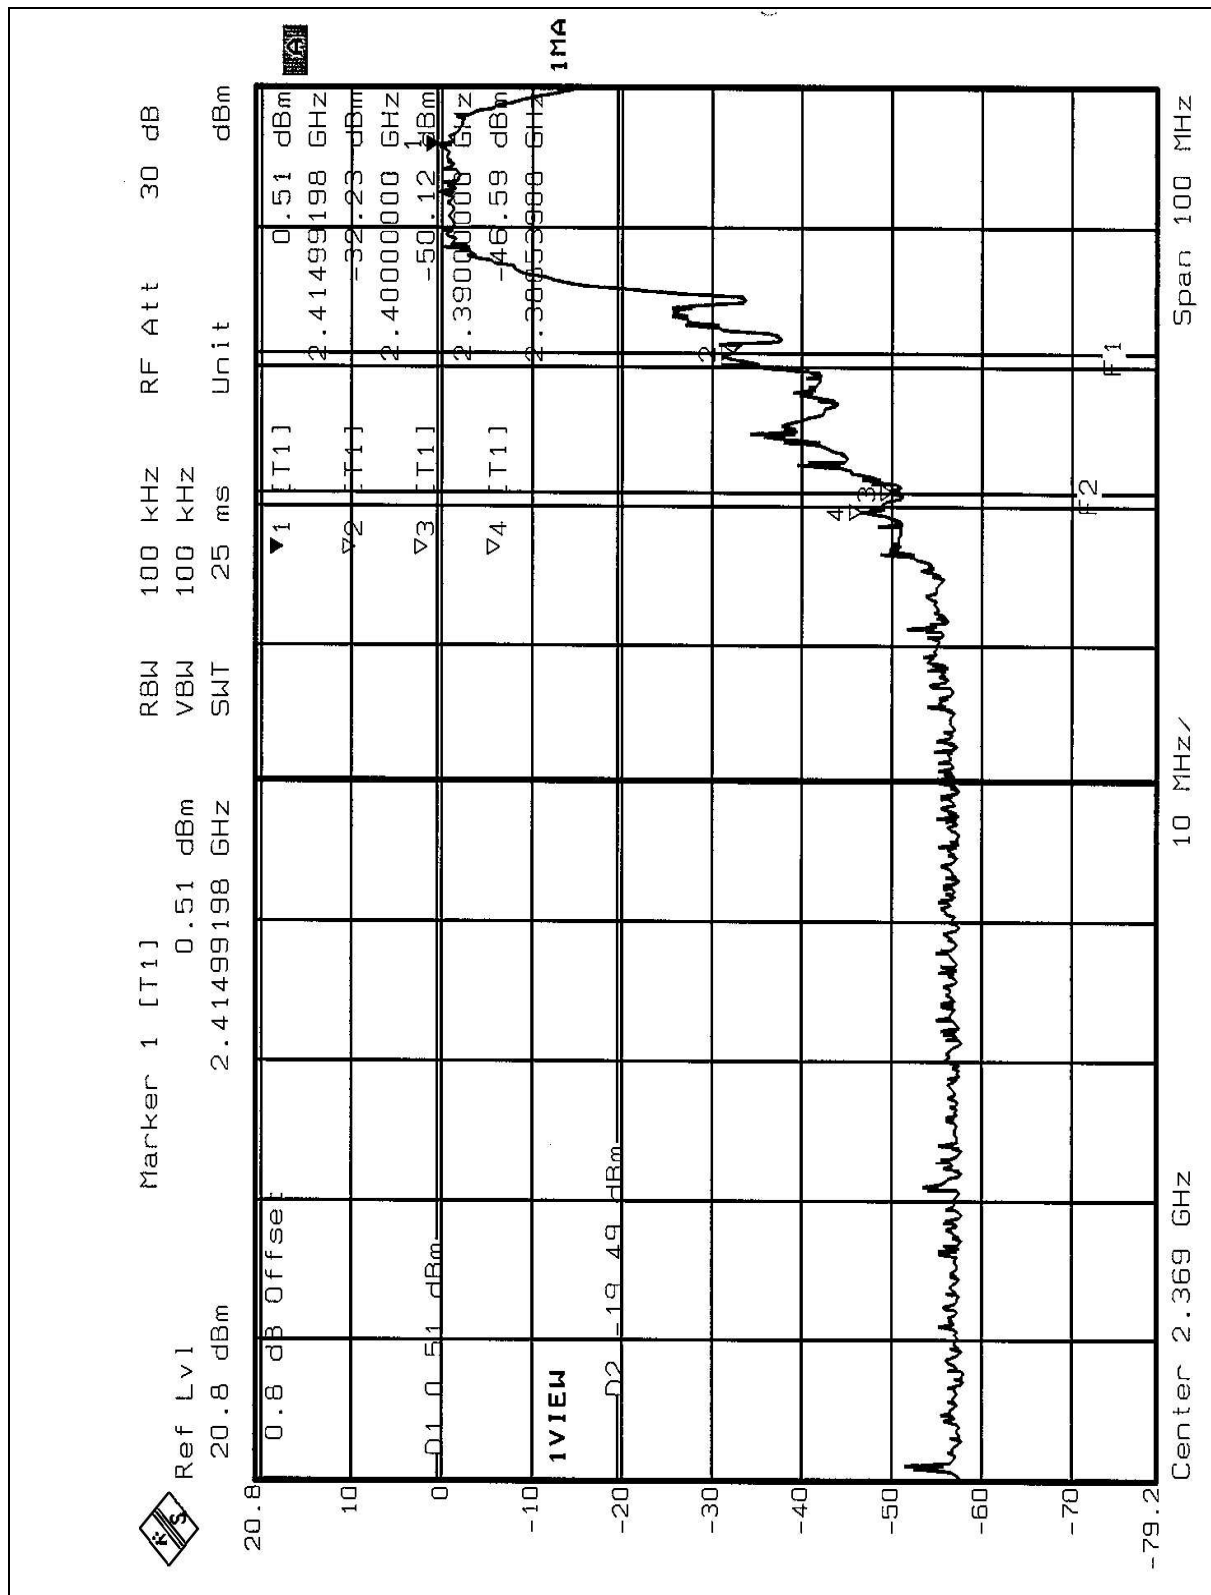

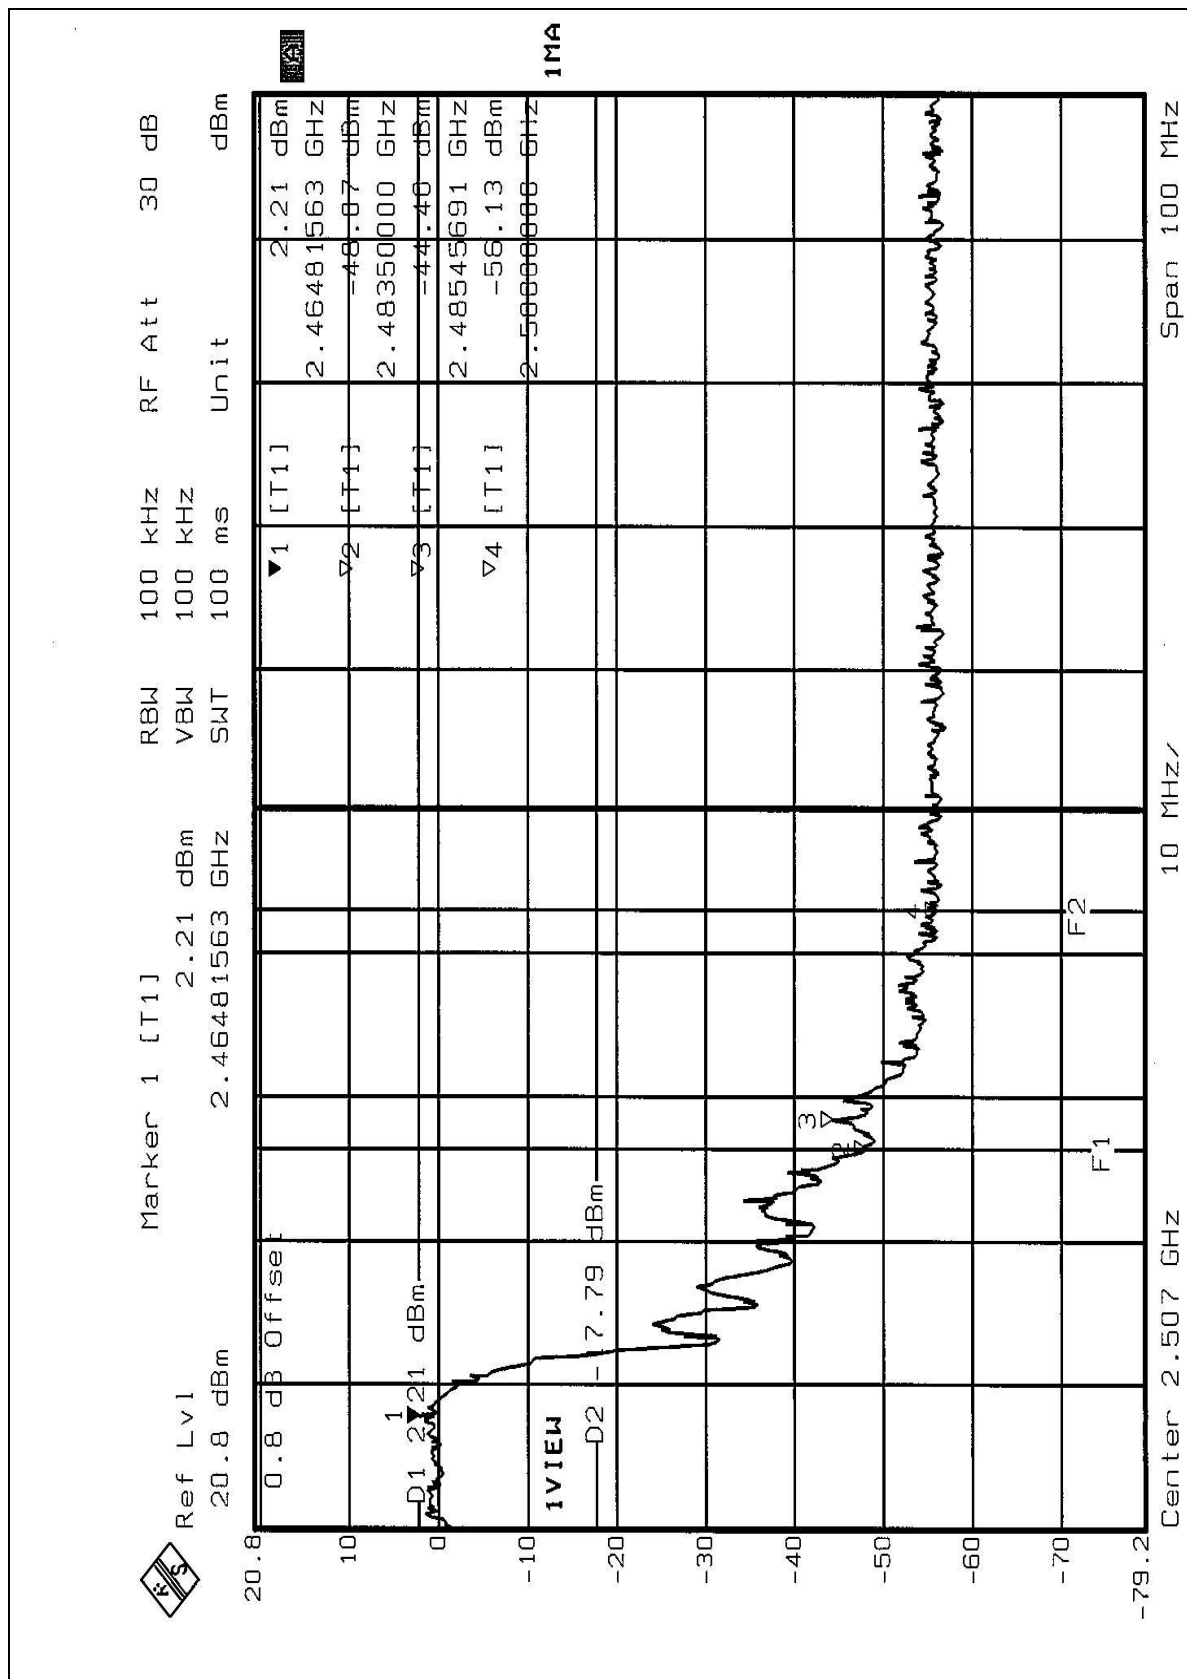



4.7 ANTENNA REQUIREMENT

4.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.7.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product is Dipole Antenna. The antenna connector type is UFL. The maximum Gain of this antenna is only 3dBi.

5 PHOTOGRAPHS OF THE TEST CONFIGURATION

CONDUCTED EMISSION TEST





RADIATED EMISSION TEST





6 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025, Guide 25 or EN 45001:

USA	FCC, NVLAP
Germany	TUV Rheinland
Japan	VCCI
New Zealand	MoC
Norway	NEMKO
R.O.C.	BSMI, DGT, CNLA

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

www.adt.com.tw/index.5/phtml.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC Lab:

Tel: 886-35-935343

Fax: 886-35-935342

Lin Kou Safety Lab:

Tel: 886-2-26093195

Fax: 886-2-26093184

Lin Kou RF&Telecom Lab

Tel: 886-3-3270910

Fax: 886-3-3270892

Email: service@mail.adt.com.tw

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.