

## FCC Test Report

**Report No.:** RF960308H04H-1

**FCC ID:** H9P2192955

**Test Model:** 21-92955

**Received Date:** Feb. 16, 2016

**Test Date:** Feb. 22 to Mar. 05, 2016

**Issued Date:** Mar. 21, 2016

**Applicant:** Symbol Technologies Inc.

**Address:** 1 Zebra Plaza, Holtsville, NY 11742

**Manufacturer:** Universal Scientific Industrial Co., Ltd

**Address:** 141, Lane 351, Sec. 1, Taiping Road., Tsaotuen, Nantou 54261, Taiwan

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch  
Hsin Chu Laboratory

**Lab Address:** E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,  
Taiwan R.O.C.

**Test Location (1):** E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,  
Taiwan R.O.C.

**Test Location (2):** No. 49, Ln. 206, Wende Rd., Shangshan Tsuen, Chiung Lin Hsiang, Hsin  
Chu Hsien 307, Taiwan R.O.C.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

## Table of Contents

<b>Report Issue History Record of EUT (21-92955).....</b>	<b>4</b>
<b>Release Control Record.....</b>	<b>4</b>
<b>1      Certificate of Conformity.....</b>	<b>5</b>
<b>2      Summary of Test Results.....</b>	<b>6</b>
2.1    Measurement Uncertainty .....	6
2.2    Modification Record .....	6
<b>3      General Information.....</b>	<b>7</b>
3.1    General Description of EUT .....	7
3.2    Description of Test Modes .....	9
3.2.1 Test Mode Applicability and Tested Channel Detail.....	10
3.3    Duty Cycle of Test Signal .....	11
3.4    Description of Support Units .....	12
3.4.1 Configuration of System under Test .....	13
3.5    General Description of Applied Standard .....	14
<b>4      Test Types and Results .....</b>	<b>15</b>
4.1    Radiated Emission and Bandedge Measurement.....	15
4.1.1 Limits of Radiated Emission and Bandedge Measurement .....	15
4.1.2 Test Instruments .....	16
4.1.3 Test Procedure .....	18
4.1.4 Deviation from Test Standard .....	18
4.1.5 Test Setup.....	19
4.1.6 EUT Operating Condition .....	20
4.1.7 Test Results .....	21
4.2    Transmit Power Measurement .....	25
4.2.1 Limits of Transmit Power Measurement .....	25
4.2.2 Test Setup.....	25
4.2.3 Test Instruments .....	25
4.2.4 Test Procedure .....	26
4.2.5 Deviation from Test Standard .....	26
4.2.6 EUT Operating Condition .....	26
4.2.7 Test Result.....	27
4.3    Peak Power Spectral Density Measurement .....	28
4.3.1 Limits of Peak Power Spectral Density Measurement .....	28
4.3.2 Test Setup.....	28
4.3.3 Test Instruments .....	28
4.3.4 Test Procedure .....	28
4.3.5 Deviation from Test Standard .....	28
4.3.6 EUT Operating Condition .....	28
4.3.7 Test Results .....	29
4.4    Frequency Stability Measurement .....	30
4.4.1 Limits of Frequency Stability Measurement .....	30
4.4.2 Test Setup.....	30
4.4.3 Test Instruments .....	30
4.4.4 Test Procedure .....	30
4.4.5 Deviation from Test Standard .....	30
4.4.6 EUT Operating Condition .....	30
4.4.7 Test Results .....	31
4.5    6dB Bandwidth Measurement.....	32
4.5.1 Limits of 6dB Bandwidth Measurement.....	32
4.5.2 Test Setup.....	32
4.5.3 Test Instruments .....	32
4.5.4 Test Procedure .....	32

4.5.5 Deviation from Test Standard .....	32
4.5.6 EUT Operating Condition .....	32
4.5.7 Test Results .....	33
<b>5 Pictures of Test Arrangements.....</b>	<b>34</b>
<b>Appendix – Information on the Testing Laboratories .....</b>	<b>35</b>

### Report Issue History Record of EUT (21-92955)

Attachment No.	Issue Date	Description
960308H04D	Sep. 28, 2009	1. Add Flip Flop to delay one signal to fix the memory self refresh. 2. Shield Modification to improved Harmonic performance in 5GHz.
960308H04H-1	Mar. 21, 2016	Upgrade the standard to section 15.407 under new rule.

### Release Control Record

Issue No.	Description	Date Issued
RF960308H04H-1	Original release.	Mar. 21, 2016



A D T

## 1 Certificate of Conformity

**Product:** 802.11a/b/g WLAN SDIO Radio Module

**Brand:** Symbol

**Test Model:** 21-92955

**Sample Status:** ENGINEERING SAMPLE

**Applicant:** Symbol Technologies Inc.

**Test Date:** Feb. 22 to Mar. 05, 2016

**Standard:** 47 CFR FCC Part 15, Subpart E (Section 15.407)

ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**Prepared by :** Midoli Peng, **Date:** Mar. 21, 2016

Midoli Peng / Specialist

**Approved by :** May Chen, **Date:** Mar. 21, 2016

May Chen / Manager

## 2 Summary of Test Results

47 CFR FCC Part 15, Subpart E (SECTION 15.407)			
FCC Clause	Test Item	Result	Remarks
15.407(b) (1/2/3/4/6)	Radiated Emissions & Band Edge Measurement	PASS	Meet the requirement of limit. Minimum passing margin is -2.9dB at 299.76MHz.
15.407(a)(1/2 /3)	Max Average Transmit Power	PASS	Meet the requirement of limit.
15.407(a)(1/2 /3)	Peak Power Spectral Density	PASS	Meet the requirement of limit.
15.407(e)	6dB bandwidth	PASS	Meet the requirement of limit. (U-NII-3 Band only)
15.407(g)	Frequency Stability	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is RP-SMA MALE not a standard connector.

**NOTE:** 1. This report is prepared for FCC Class II change. (Upgrade the standard to section 15.407 under new rule)

### 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expended Uncertainty (k=2) (±)
Radiated Emissions up to 1 GHz	30MHz ~ 1GHz	5.37 dB
Radiated Emissions above 1 GHz	1GHz ~ 6GHz	3.65 dB
	6GHz ~ 18GHz	3.88 dB
	18GHz ~ 40GHz	4.11 dB

### 2.2 Modification Record

There were no modifications required for compliance.

### 3 General Information

#### 3.1 General Description of EUT

Product	802.11a/b/g WLAN SDIO Radio Module
Brand	Symbol
Test Model	21-92955
Status of EUT	ENGINEERING SAMPLE
Power Supply Rating	DC 3.3V +/-5% from host equipment
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
Modulation Technology	DSSS, OFDM
Transfer Rate	802.11b: up to 11Mbps 802.11a /g: up to 54Mbps
Operating Frequency	<b>For 15.407</b> 5.18 ~ 5.24GHz, 5.26 ~ 5.32GHz, 5.50 ~ 5.70GHz, 5.745 ~ 5.825GHz <b>For 15.247</b> 2.412 ~ 2.462GHz
Number of Channel	<b>For 15.407</b> 24 for 802.11a <b>For 15.247</b> 11 for 802.11b, 802.11g
Output Power	<b>For 15.407 (U-NII-3 band)</b> 802.11a: 7.998mW <b>For 15.407 (U-NII-1, U-NII-2A and U-NII-2C Bands)</b> 802.11a: 36.058mW <b>For 15.247 (2.4GHz)</b> 802.11b: 44.668mW 802.11g: 109.648mW
Antenna Type	Refer to Note
Antenna Connector	Refer to Note
Accessory Device	NA
Data Cable Supplied	NA

## Note:

1. This report is prepared for FCC Class II change. The difference compared with the Report No.: RF960308H04D-1 design is as the following:
  - ◆ Upgrade the standard to section 15.407 under new rule.
2. For U-NII-1, U-NII-2A and 2C Bands: There is no increase in authorized power level, so RF test data refer original test report (Report No.: RF960308H04D-1).
3. According to above conditions, therefor only U-NII-3 band need to be performed except for AC power conducted emission test item. And all data was verified to meet the requirements.
4. The antennas provided to the EUT, please refer to the following table:

Model No.	Symbol P/N	Frequency Range	Gain (dBi)	Cable Loss (dB)	Net Gain (dBi)	Antenna Type	Connector
C802-510001-A	ML-2452-APA2-01	2.4GHz	3	0.5	2.5	Dipole	RP-SMA MALE
		5GHz	4	1.2	2.8		

5. The EUT incorporates a SISO function

**For 2.4GHz Band**

MODULATION MODE	DATA RATE (MCS)	TX & RX CONFIGURATION	
802.11b	1 ~ 11Mbps	1TX	1RX
802.11g	6 ~ 54Mbps	1TX	1RX

MODULATION MODE	DATA RATE (MCS)	TX & RX CONFIGURATION	
802.11a	6 ~ 54Mbps	1TX	1RX

6. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

### 3.2 Description of Test Modes

#### FOR 5745 ~ 5825MHz:

5 channels are provided for 802.11a:

Channel	Frequency	Channel	Frequency
149	5745MHz	161	5805MHz
153	5765MHz	165	5825MHz
157	5785MHz		

### 3.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE≥1G	RE<1G	PLC	APCM	
1	√	√	-	√	-

Where **RE≥1G**: Radiated Emission above 1GHz      **RE<1G**: Radiated Emission below 1GHz  
**PLC**: Power Line Conducted Emission      **APCM**: Antenna Port Conducted Measurement

**NOTE:**

1. means no effect.

#### Radiated Emission Test (Above 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11a	5745-5825	149 to 165	149, 157, 165	OFDM	BPSK	6

#### Radiated Emission Test (Below 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11a	5745-5825	149 to 165	157	OFDM	BPSK	6

#### Antenna Port Conducted Measurement:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11a	5745-5825	149 to 165	149, 157, 165	OFDM	BPSK	6


#### Test Condition:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER (system)	TESTED BY	TEST LOCATION
RE≥1G	22deg. C, 64%RH	120Vac, 60Hz	Jyunchun Lin	2
RE<1G	24deg. C, 66%RH	120Vac, 60Hz	Weiwei Lo	2
APCM	25deg. C, 60%RH	120Vac, 60Hz	Weiwei Lo	2

### 3.3 Duty Cycle of Test Signal

Duty cycle of test signal is 100 %, duty factor is not required.

**802.11a**

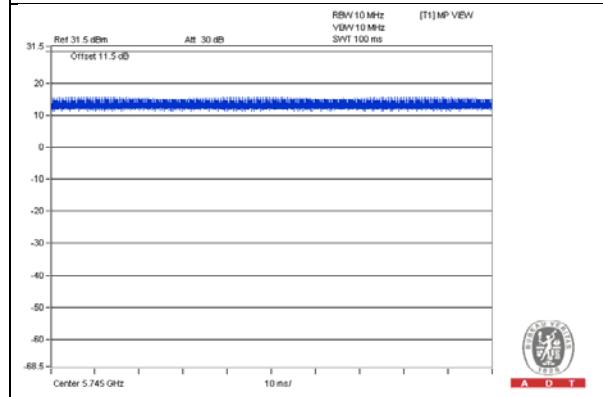

### 3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	TEST TOOL	NA	NA	NA	NA	Supplied by client
B.	TEST TOOL	NA	NA	NA	NA	Supplied by client
C.	NOTEBOOK COMPUTER	DELL	PP32LA	DSLB32S	FCC DoC	Provided by Lab
D.	DC POWER SUPPLY	Topward	6603D	795551	NA	Provided by Lab

Note:

1. All power cords of the above support units are non-shielded (1.8m).

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	DC	1	3	No	0	Provided by Lab
2.	RJ-45	1	10	No	0	Provided by Lab
3.	DC	1	1.9	No	1	Supplied by client
4.	DC	1	3	No	0	Provided by Lab

### 3.4.1 Configuration of System under Test

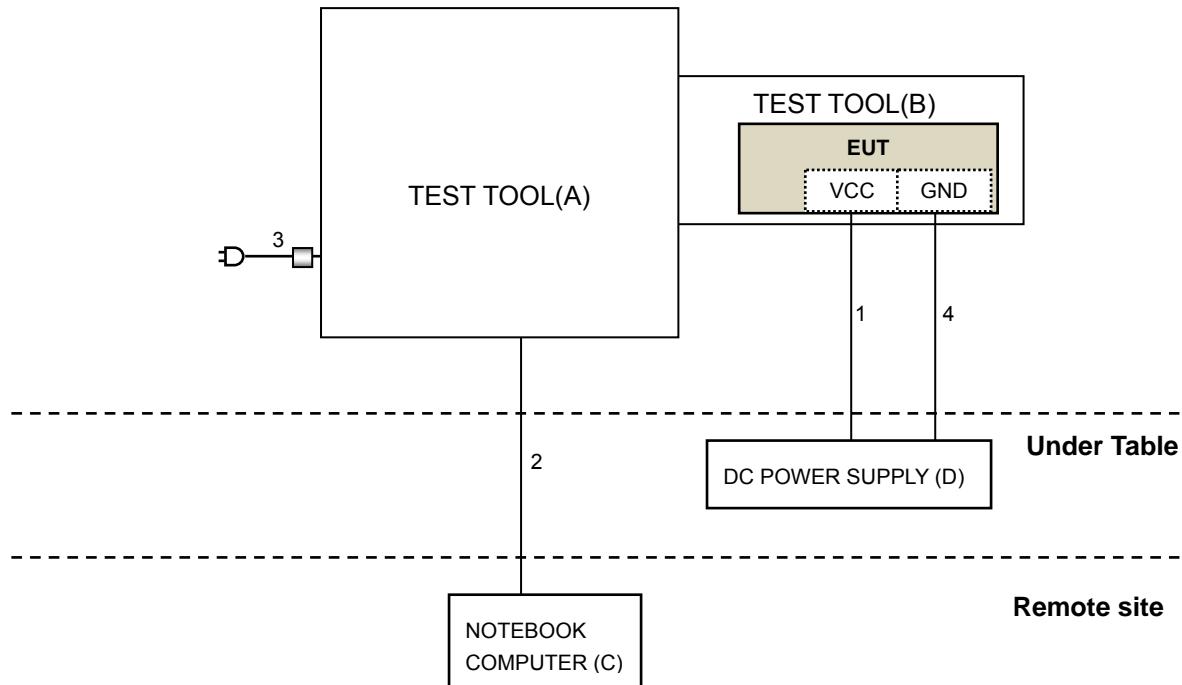

### 3.5 General Description of Applied Standard

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC Part 15, Subpart E (15.407)**

**KDB 789033 D02 General UNII Test Procedure New Rules v01r01**

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

**NOTE:** The EUT has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

## 4 Test Types and Results

### 4.1 Radiated Emission and Bandedge Measurement

#### 4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dB $\mu$ V/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

#### LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

APPLICABLE TO	LIMIT	
KDB 789033 D02 General UNII Test Procedure New Rules v01r01	FIELD STRENGTH AT 3m	
	PK:74 (dB $\mu$ V/m)	AV:54 (dB $\mu$ V/m)
APPLICABLE TO	EIRP LIMIT	EQUIVALENT FIELD STRENGTH AT 3m
15.407(b)(1)		
15.407(b)(2)	PK:-27 (dBm/MHz)	PK:68.2(dB $\mu$ V/m)
15.407(b)(3)		
15.407(b)(4)	PK:-27 (dBm/MHz) <sup>*1</sup> PK:-17 (dBm/MHz) <sup>*2</sup>	PK: 68.2(dB $\mu$ V/m) <sup>*1</sup> PK:78.2 (dB $\mu$ V/m) <sup>*2</sup>

**NOTE:** <sup>\*1</sup>beyond 10MHz of the band edge    <sup>\*2</sup>within 10 MHz of band edge

The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts).}$$

## 4.1.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Agilent	N9038A	MY51210105	July 24, 2015	July 23, 2016
Pre-Amplifier <sup>(*)</sup> EMCI	EMC001340	980142	Jan. 20, 2016	Jan. 19, 2018
Loop Antenna <sup>(*)</sup> Electro-Metrics	EM-6879	264	Dec. 16, 2014	Dec. 15, 2016
RF Cable	NA	LOOPCAB-001 LOOPCAB-002	Jan. 18, 2016	Jan. 17, 2017
Pre-Amplifier Mini-Circuits	ZFL-1000VH2 B	AMP-ZFL-03	Nov. 11, 2015	Nov. 10, 2016
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-360	Jan. 04, 2016	Jan. 03, 2017
RF Cable	8D-FB	CHGCAB-001-1 CHGCAB-001-2	Oct. 03, 2015	Oct. 02, 2016
	RF-141	CHGCAB-004	Oct. 03, 2015	Oct. 02, 2016
Horn_Antenna AISI	AIH.8018	0000320091110	Jan. 19, 2016	Jan. 18, 2017
Pre-Amplifier Agilent	8449B	3008A02578	June 23, 2015	June 22, 2016
RF Cable	NA	131205 131216 131217 SNMY23684/4	Jan. 15, 2016	Jan. 14, 2017
Spectrum Analyzer Agilent	E4446A	MY48250254	Nov. 25, 2015	Nov. 24, 2016
Pre-Amplifier SPACEK LABS	SLKKa-48-6	9K16	Dec. 11, 2015	Dec. 10, 2016
Horn_Antenna SCHWARZBECK	BBHA 9170	9170-424	Jan. 18, 2016	Jan. 17, 2017
RF Cable	SUCOFLEX 102	36442/2 36434/2	Dec. 10, 2015	Dec.09, 2016
Software	ADT_Radiated_V8.7.07	NA	NA	NA
Antenna Tower & Turn Table CT	NA	NA	NA	NA
Spectrum Analyzer R&S	FSP 40	100036	Jan. 27, 2016	Jan. 26, 2017
Temperature & Humidity Chamber TERCHY	MHU-225AU	911033	Dec. 03, 2015	Dec. 02, 2016
Power meter Anritsu	ML2495A	0824006	May 25, 2015	May 24, 2016
Power sensor Anritsu	MA2411B	0738172	May 25, 2015	May 24, 2016

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. \*The calibration interval of the above test instruments is 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
3. Loop antenna was used for all emissions below 30 MHz.
4. The test was performed in 966 Chamber No. G.
5. The FCC Site Registration No. is 966073.
6. The VCCI Site Registration No. is G-137.
7. The CANADA Site Registration No. is IC 7450H-2.
7. Tested Date: Feb. 22 to Mar. 05, 2016

#### 4.1.3 Test Procedure

- a. The EUT was placed on the top of a rotating table 0.8 meters (for below 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.



**Note:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for RMS Average (Duty cycle < 98%) for Average detection (AV) at frequency above 1GHz, then the measurement results was added to a correction factor ( $10 \log(1/\text{duty cycle})$ ).
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz (Duty cycle  $\geq 98\%$ ) for Average detection (AV) at frequency above 1GHz.
5. All modes of operation were investigated and the worst-case emissions are reported.

#### 4.1.4 Deviation from Test Standard

No deviation.

## 4.1.5 Test Setup

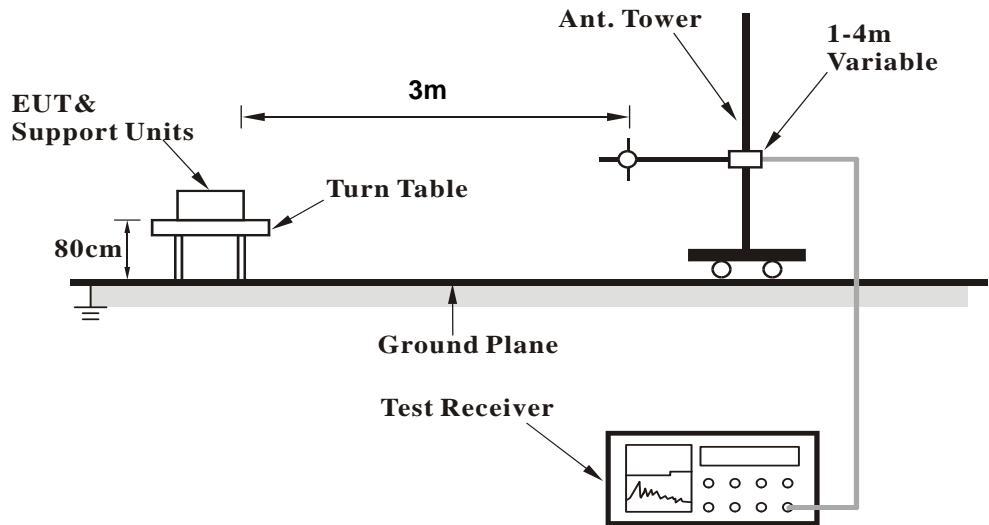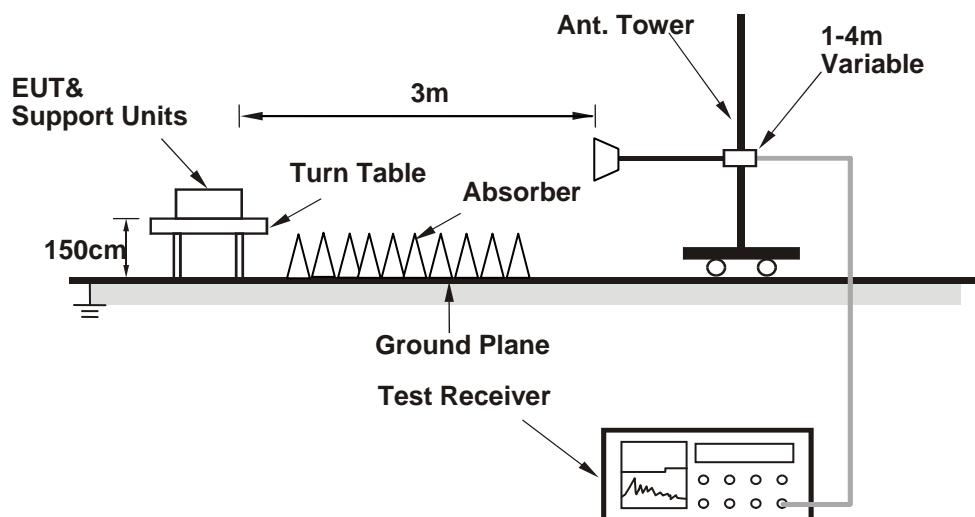**<Frequency Range below 1GHz>**

**<Frequency Range above 1GHz>**


For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.1.6 EUT Operating Condition

1. Connect the EUT with the support unit A (Test tool) which placed on a testing table.
2. The support unit C (Notebook computer) ran a test program “Continuous Transmit-Receive 3.0.1.1.exe” to enable EUT under transmission condition continuously.

## 4.1.7 Test Results

## Above 1GHz Data

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5715.00	51.4 PK	74.0	-22.6	2.17 H	45	39.93	11.47
2	#5715.00	40.1 AV	54.0	-13.9	2.17 H	45	28.63	11.47
3	#5725.00	60.1 PK	78.2	-18.1	2.17 H	45	48.59	11.51
4	*5745.00	95.5 PK			2.17 H	45	83.89	11.61
5	*5745.00	85.8 AV			2.17 H	45	74.19	11.61
6	11490.00	57.7 PK	74.0	-16.3	2.02 H	344	39.78	17.92
7	11490.00	44.8 AV	54.0	-9.2	2.02 H	344	26.88	17.92
8	#17235.00	66.8 PK	74.0	-7.2	1.96 H	328	39.59	27.21
9	#17235.00	48.4 AV	54.0	-5.6	1.96 H	328	21.19	27.21
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5715.00	55.9 PK	74.0	-18.1	2.19 V	360	44.43	11.47
2	#5715.00	44.6 AV	54.0	-9.4	2.19 V	360	33.13	11.47
3	#5725.00	66.8 PK	78.2	-11.4	2.19 V	360	55.29	11.51
4	*5745.00	103.7 PK			2.19 V	360	92.09	11.61
5	*5745.00	94.2 AV			2.19 V	360	82.59	11.61
6	11490.00	60.0 PK	74.0	-14.0	2.01 V	348	42.08	17.92
7	11490.00	47.5 AV	54.0	-6.5	2.01 V	348	29.58	17.92
8	#17235.00	66.9 PK	74.0	-7.1	1.97 V	344	39.69	27.21
9	#17235.00	49.0 AV	54.0	-5.0	1.97 V	344	21.79	27.21

## REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5715.00	52.3 PK	74.0	-21.7	2.17 H	35	40.83	11.47
2	#5715.00	40.8 AV	54.0	-13.2	2.17 H	35	29.33	11.47
3	#5725.00	53.2 PK	78.2	-25.0	2.17 H	35	41.69	11.51
4	*5785.00	95.3 PK			2.17 H	35	83.49	11.81
5	*5785.00	85.7 AV			2.17 H	35	73.89	11.81
6	#5850.00	52.1 PK	78.2	-26.1	2.17 H	35	40.07	12.03
7	#5860.00	52.6 PK	74.0	-21.4	2.17 H	35	40.55	12.05
8	#5860.00	40.5 AV	54.0	-13.5	2.17 H	35	28.45	12.05
9	11570.00	57.0 PK	74.0	-17.0	2.05 H	349	38.96	18.04
10	11570.00	44.4 AV	54.0	-9.6	2.05 H	349	26.36	18.04
11	#17355.00	66.6 PK	74.0	-7.4	1.97 H	333	39.27	27.33
12	#17355.00	48.2 AV	54.0	-5.8	1.97 H	333	20.87	27.33

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5715.00	55.6 PK	74.0	-18.4	1.95 V	354	44.13	11.47
2	#5715.00	43.9 AV	54.0	-10.1	1.95 V	354	32.43	11.47
3	#5725.00	56.1 PK	78.2	-22.1	1.95 V	354	44.59	11.51
4	*5785.00	103.6 PK			2.21 V	360	91.79	11.81
5	*5785.00	93.3 AV			2.21 V	360	81.49	11.81
6	#5850.00	55.9 PK	78.2	-22.3	1.95 V	354	43.87	12.03
7	#5860.00	57.7 PK	74.0	-16.3	1.95 V	354	45.65	12.05
8	#5860.00	44.2 AV	54.0	-9.8	1.95 V	354	32.15	12.05
9	11570.00	60.2 PK	74.0	-13.8	2.00 V	335	42.16	18.04
10	11570.00	47.9 AV	54.0	-6.1	2.00 V	335	29.86	18.04
11	#17355.00	67.4 PK	74.0	-6.6	2.03 V	355	40.07	27.33
12	#17355.00	49.3 AV	54.0	-4.7	2.03 V	355	21.97	27.33

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

<b>CHANNEL</b>	TX Channel 165	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	93.6 PK			2.20 H	51	81.63	11.97
2	*5825.00	85.1 AV			2.20 H	51	73.13	11.97
3	#5850.00	55.6 PK	78.2	-22.6	2.20 H	51	43.57	12.03
4	#5860.00	53.1 PK	74.0	-20.9	2.20 H	51	41.05	12.05
5	#5860.00	40.6 AV	54.0	-13.4	2.20 H	51	28.55	12.05
6	11650.00	57.3 PK	74.0	-16.7	2.05 H	354	39.35	17.95
7	11650.00	44.6 AV	54.0	-9.4	2.05 H	354	26.65	17.95
8	#17475.00	66.8 PK	74.0	-7.2	2.02 H	320	39.04	27.76
9	#17475.00	48.2 AV	54.0	-5.8	2.02 H	320	20.44	27.76

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	101.9 PK			2.07 V	360	89.93	11.97
2	*5825.00	92.7 AV			2.07 V	360	80.73	11.97
3	#5850.00	61.8 PK	78.2	-16.4	2.07 V	360	49.77	12.03
4	#5860.00	56.9 PK	74.0	-17.1	2.07 V	360	44.85	12.05
5	#5860.00	44.1 AV	54.0	-9.9	2.07 V	360	32.05	12.05
6	11650.00	60.1 PK	74.0	-13.9	1.98 V	360	42.15	17.95
7	11650.00	47.4 AV	54.0	-6.6	1.98 V	360	29.45	17.95
8	#17475.00	66.3 PK	74.0	-7.7	1.96 V	336	38.54	27.76
9	#17475.00	48.6 AV	54.0	-5.4	1.96 V	336	20.84	27.76

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

## Below 1GHz Data

<b>CHANNEL</b>	TX Channel 157	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
<b>FREQUENCY RANGE</b>	Below 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	299.76	43.1 QP	46.0	-2.9	1.25 H	95	49.89	-6.77
2	440.38	36.3 QP	46.0	-9.7	1.00 H	36	38.82	-2.54
3	474.62	38.2 QP	46.0	-7.8	2.00 H	341	40.14	-1.98
4	524.58	40.8 QP	46.0	-5.2	1.50 H	0	41.86	-1.05
5	549.56	42.8 QP	46.0	-3.2	2.00 H	118	43.39	-0.59
6	774.38	40.4 QP	46.0	-5.6	1.00 H	219	36.33	4.11
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	299.76	39.7 QP	46.0	-6.3	1.50 V	321	46.43	-6.77
2	384.24	40.8 QP	46.0	-5.2	1.50 V	322	45.18	-4.38
3	524.58	39.1 QP	46.0	-7.0	1.00 V	125	40.10	-1.05
4	624.51	38.9 QP	46.0	-7.1	1.00 V	78	37.31	1.61
5	719.99	39.6 QP	46.0	-6.4	1.25 V	360	36.92	2.70
6	880.01	37.6 QP	46.0	-8.4	1.25 V	107	32.12	5.51

## REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

## 4.2 Transmit Power Measurement

### 4.2.1 Limits of Transmit Power Measurement

Operation Band	EUT Category		LIMIT
U-NII-1	Outdoor Access Point		1 Watt (30 dBm) (Max. e.i.r.p $\leq$ 125mW(21 dBm) at any elevation angle above 30 degrees as measured from the horizon)
	Fixed point-to-point Access Point		1 Watt (30 dBm)
	Indoor Access Point		1 Watt (30 dBm)
	Mobile and Portable client device		250mW (24 dBm)
U-NII-2A			250mW (24 dBm) or 11 dBm+10 log B*
U-NII-2C			250mW (24 dBm) or 11 dBm+10 log B*
U-NII-3	✓		1 Watt (30 dBm)

\*B is the 26 dB emission bandwidth in megahertz

Per KDB 662911 Method of conducted output power measurement on IEEE 802.11 devices,


Array Gain = 0 dB (i.e., no array gain) for  $N_{ANT} \leq 4$ ;

Array Gain = 0 dB (i.e., no array gain) for channel widths  $\geq 40$  MHz for any  $N_{ANT}$ ;

Array Gain =  $5 \log(N_{ANT}/N_{SS})$  dB or 3 dB, whichever is less for 20-MHz channel widths with  $N_{ANT} \geq 5$ .

For power measurements on all other devices: Array Gain =  $10 \log(N_{ANT}/N_{SS})$  dB.

### 4.2.2 Test Setup

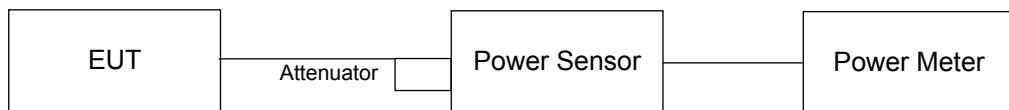

### 4.2.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

#### 4.2.4 Test Procedure

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

#### 4.2.5 Deviation from Test Standard

No deviation.

#### 4.2.6 EUT Operating Condition

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

#### 4.2.7 Test Result

##### Average Power Output:

Chan.	Chan. Freq. (MHz)	Maximum Average Power (mW)	Maximum Average Power (dBm)	Power Limit (dBm)	Pass/Fail
149	5745	7.998	9.03	30	Pass
157	5785	6.637	8.22	30	Pass
165	5825	6.053	7.82	30	Pass

##### Peak Power Output (For reference):


Chan.	Chan. Freq. (MHz)	Maximum Peak Power (mW)	Maximum Peak Power (dBm)
149	5745	74.989	18.75
157	5785	65.313	18.15
165	5825	63.826	18.05

### 4.3 Peak Power Spectral Density Measurement

#### 4.3.1 Limits of Peak Power Spectral Density Measurement

Operation Band	EUT Category		LIMIT
U-NII-1		Outdoor Access Point	17dBm/ MHz
		Fixed point-to-point Access Point	
		Indoor Access Point	
		Mobile and Portable client device	11dBm/ MHz
U-NII-2A			11dBm/ MHz
U-NII-2C			11dBm/ MHz
U-NII-3	√		30dBm/ 500kHz

#### 4.3.2 Test Setup

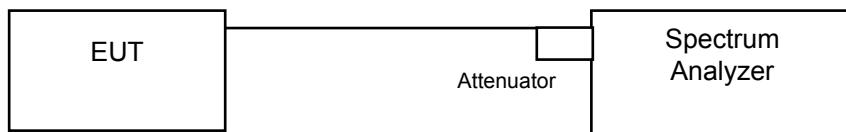

#### 4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

#### 4.3.4 Test Procedure

1. Set span to encompass the entire emission bandwidth (EBW) of the signal.
2. Set RBW = 300 kHz, Set VBW  $\geq$  1 MHz, Detector = RMS
3. Use the peak marker function to determine the maximum power level in any 300 kHz band segment within the fundamental EBW.
4. Scale the observed power level to an equivalent value in 500 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where  $BWCF = 10\log(500\text{ kHz}/300\text{ kHz})$
5. Sweep time = auto, trigger set to "free run".
6. Trace average at least 100 traces in power averaging mode.
7. Record the max value

#### 4.3.5 Deviation from Test Standard


No deviation.

#### 4.3.6 EUT Operating Condition

Same as Item 4.2.6.

## 4.3.7 Test Results

Chan.	Chan. Freq. (MHz)	PSD (dBm/300kHz)	PSD (dBm/500kHz)	Limit (dBm/500kHz)	Pass /Fail
149	5745	-11.70	-9.48	30	Pass
157	5785	-12.46	-10.24	30	Pass
165	5825	-14.04	-11.82	30	Pass

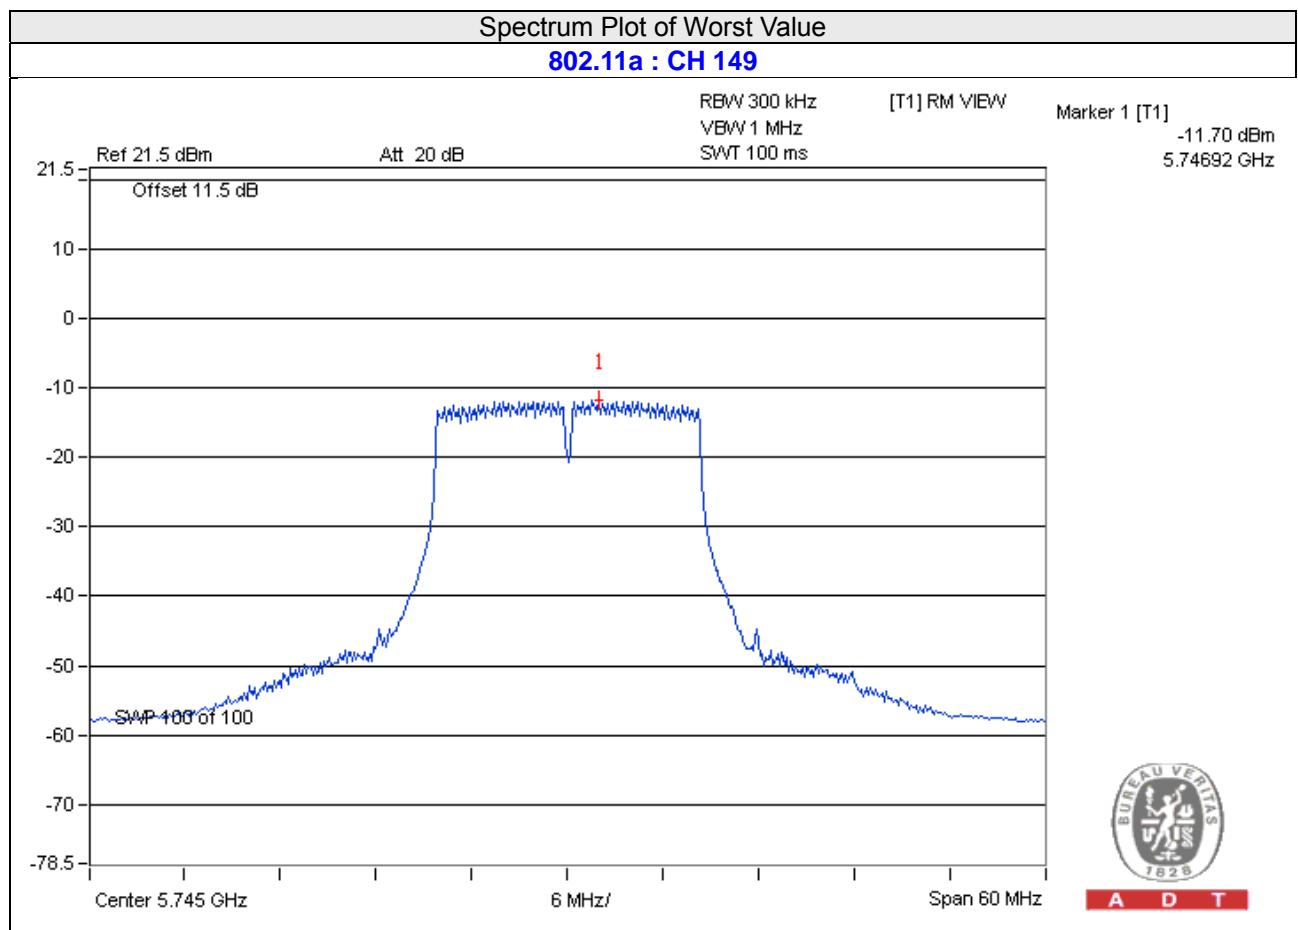


## 4.4 Frequency Stability Measurement

### 4.4.1 Limits of Frequency Stability Measurement

The frequency of the carrier signal shall be maintained within band of operation

### 4.4.2 Test Setup

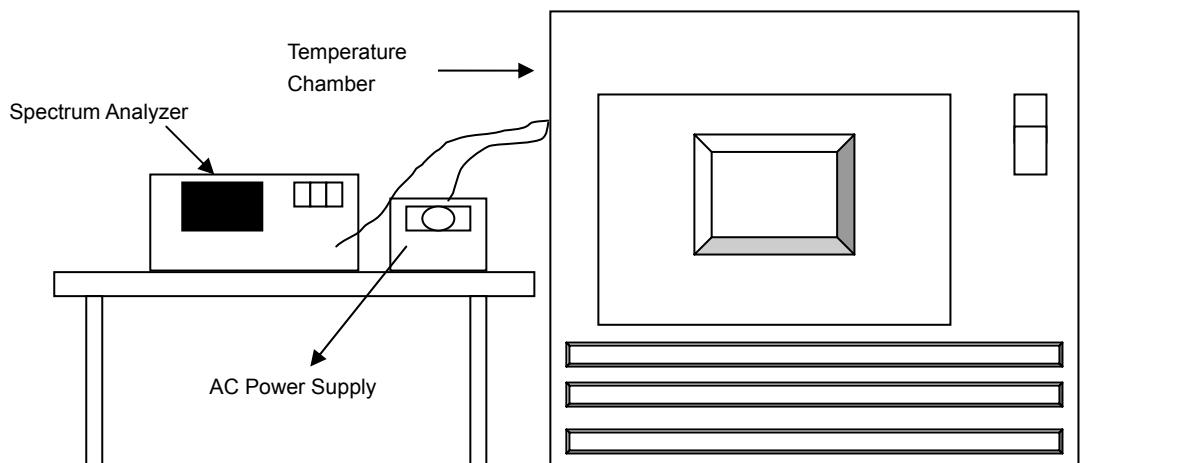

### 4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.4.4 Test Procedure

- a. The EUT was placed inside the environmental test chamber and powered by nominal AC voltage.
- b. Turn the EUT on and couple its output to a spectrum analyzer.
- c. Turn the EUT off and set the chamber to the highest temperature specified.
- d. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
- e. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
- f. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.
- .

### 4.4.5 Deviation from Test Standard

No deviation.

### 4.4.6 EUT Operating Condition

Set the EUT transmit at un-modulation mode to test frequency stability.

## 4.4.7 Test Results

FREQUEMCY STABILITY VERSUS TEMP.									
OPERATING FREQUENCY: 5745MHz									
TEMP. (°C)	POWER SUPPLY (Vac)	0 MINUTE		2 MINUTE		5 MINUTE		10 MINUTE	
		Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)
50	120	5745.0184	0.00032	5745.0213	0.00037	5745.0196	0.00034	5745.0189	0.00033
40	120	5745.0171	0.00030	5745.0184	0.00032	5745.0153	0.00027	5745.0156	0.00027
30	120	5744.9798	-0.00035	5744.9783	-0.00038	5744.981	-0.00033	5744.98	-0.00035
20	120	5745.0273	0.00048	5745.0248	0.00043	5745.0225	0.00039	5745.0265	0.00046
10	120	5745.0233	0.00041	5745.0263	0.00046	5745.0216	0.00038	5745.0264	0.00046
0	120	5744.9877	-0.00021	5744.9834	-0.00029	5744.9823	-0.00031	5744.9868	-0.00023
-10	120	5745.0261	0.00045	5745.0264	0.00046	5745.0257	0.00045	5745.0278	0.00048
-20	120	5744.9787	-0.00037	5744.9813	-0.00033	5744.9792	-0.00036	5744.9768	-0.00040
-30	120	5745.0072	0.00013	5745.0047	0.00008	5745.0052	0.00009	5745.0063	0.00011


FREQUEMCY STABILITY VERSUS VOLTAGE									
OPERATING FREQUENCY: 5745MHz									
TEMP. (°C)	POWER SUPPLY (Vac)	0 MINUTE		2 MINUTE		5 MINUTE		10 MINUTE	
		Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)
20	138	5745.0276	0.00048	5745.0254	0.00044	5745.0217	0.00038	5745.0265	0.00046
	120	5745.0273	0.00048	5745.0248	0.00043	5745.0225	0.00039	5745.0265	0.00046
	102	5745.0264	0.00046	5745.0244	0.00042	5745.0216	0.00038	5745.0261	0.00045

## 4.5 6dB Bandwidth Measurement

### 4.5.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5MHz.

### 4.5.2 Test Setup

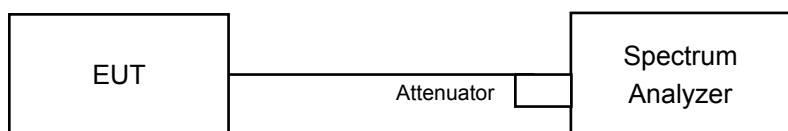

### 4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.5.4 Test Procedure

#### MEASUREMENT PROCEDURE REF

- a. Set resolution bandwidth (RBW) = 100kHz
- b. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW, Detector = Peak.
- c. Trace mode = max hold.
- d. Sweep = auto couple.
- e. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

### 4.5.5 Deviation from Test Standard


No deviation.

### 4.5.6 EUT Operating Condition

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

#### 4.5.7 Test Results

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
149	5745	16.54	0.5	Pass
157	5785	16.55	0.5	Pass
165	5825	16.61	0.5	Pass

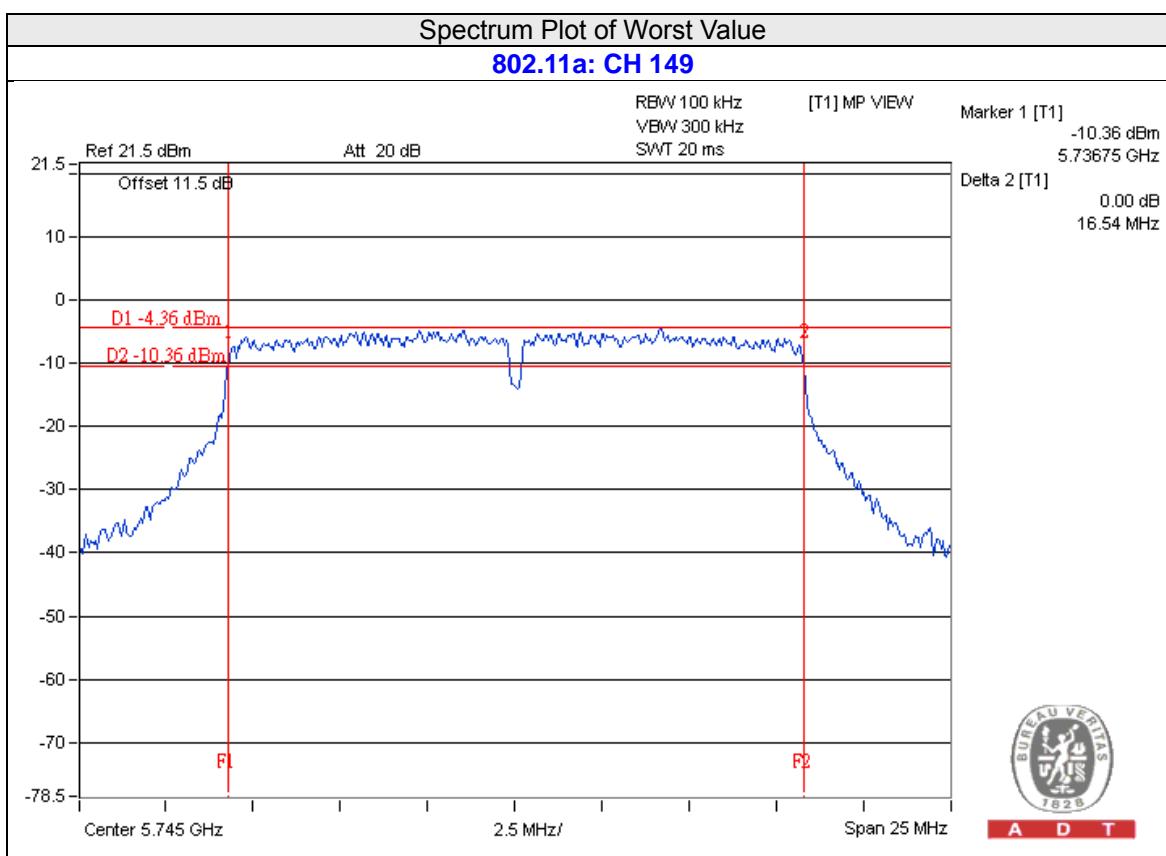



A D T

## 5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

## Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Linko EMC/RF Lab**

Tel: 886-2-26052180  
Fax: 886-2-26051924

**Hsin Chu EMC/RF/Telecom Lab**

Tel: 886-3-6668565  
Fax: 886-3-6668323

**Hwa Ya EMC/RF/Safety Lab**

Tel: 886-3-3183232  
Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.

--- END ---