


# FCC Test Report

**EQUIPMENT** : Mobile Computer  
**BRAND NAME** : Symbol  
**MODEL NAME** : FR6076  
**FCC ID** : H9PFR6076  
**STANDARD** : FCC Part 15 Subpart C §15.247  
**CLASSIFICATION** : Digital Spread Spectrum (DSS)  
**APPLICANT** : Symbol Technologies, Inc., A Motorola Company  
230 Victoria Street #12-06/10 Bugis Junction Office Tower  
Singapore 188024

The product sample received on Oct. 31, 2008 and completely tested on Feb. 10, 2009. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.4-2003 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.



Reviewed by: Roy Wu / Manager



## SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.

## TABLE OF CONTENTS

|                                                          |           |
|----------------------------------------------------------|-----------|
| <b>SUMMARY OF TEST RESULT .....</b>                      | <b>3</b>  |
| <b>REVISION HISTORY.....</b>                             | <b>4</b>  |
| <b>1 GENERAL DESCRIPTION.....</b>                        | <b>5</b>  |
| 1.1 Applicant.....                                       | 5         |
| 1.2 Manufacturer.....                                    | 5         |
| 1.3 Feature of Equipment Under Test.....                 | 5         |
| 1.4 Testing Site.....                                    | 7         |
| 1.5 Applied Standards .....                              | 7         |
| 1.6 Ancillary Equipment List .....                       | 7         |
| <b>2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....</b> | <b>8</b>  |
| 2.1 Pre-Scanned RF Power.....                            | 8         |
| 2.2 Test Mode.....                                       | 9         |
| 2.3 Connection Diagram of Test System.....               | 10        |
| 2.4 RF Utility .....                                     | 11        |
| <b>3 TEST RESULT .....</b>                               | <b>12</b> |
| 3.1 Number of Channel Measurement .....                  | 12        |
| 3.2 20dB Bandwidth Measurement .....                     | 16        |
| 3.3 Hopping Channel Separation Measurement .....         | 23        |
| 3.4 Dwell Time Measurement.....                          | 30        |
| 3.5 Peak Output Power Measurement .....                  | 43        |
| 3.6 Band Edges Measurement.....                          | 52        |
| 3.7 AC Conducted Emission Measurement.....               | 58        |
| 3.8 Radiated Emission Measurement.....                   | 66        |
| 3.9 Antenna Requirements.....                            | 80        |
| <b>4 LIST OF MEASURING EQUIPMENTS .....</b>              | <b>81</b> |
| <b>5 UNCERTAINTY OF EVALUATION.....</b>                  | <b>82</b> |
| <b>6 CERTIFICATION OF TAF ACCREDITATION .....</b>        | <b>84</b> |
| <b>APPENDIX A. PHOTOGRAPHS OF EUT</b>                    |           |
| <b>APPENDIX B. SETUP PHOTOGRAPHS</b>                     |           |

## SUMMARY OF TEST RESULT

| Report Section | FCC Rule              | IC Rule   | Description                   | Limit                                  | Result | Remark                                   |
|----------------|-----------------------|-----------|-------------------------------|----------------------------------------|--------|------------------------------------------|
| 3.1            | 15.247(b)(1)          | A8.4(2)   | Number of Channels            | $\geq 15\text{Chs}$                    | Pass   |                                          |
| 3.2            | 15.247(a)(1)          | A8.1(a)   | 20dB Bandwidth                | NA                                     | Pass   | -                                        |
| 3.3            | 15.247(a)(1)          | A8.1(b)   | Channel Separation            | $\geq 2/3$ of 20dB BW                  | Pass   | -                                        |
| 3.4            | 15.247(a)(1)          | A8.1(d)   | Dwell Time of Each Channel    | $\leq 0.4\text{sec}$ in 31.6sec period | Pass   | -                                        |
| 3.5            | 15.247(a)(1)          | A8.1(b)   | Peak Output Power             | $\leq 1\text{W}$                       | Pass   | -                                        |
| 3.6            | 15.247(d)             | A8.5      | Frequency Band Edges          | $\leq 20\text{dBc}$                    | Pass   | -                                        |
| 3.7            | 15.207                | Gen 7.2.2 | AC Conducted Emission         | 15.207(a)                              | Pass   | Under limit<br>14.3 dB at<br>0.702 MHz   |
| 3.8            | 15.247(d)             | A8.5      | Transmitter Radiated Emission | 15.209(a) &<br>15.247(d)               | Pass   | Under limit<br>7.16 dB at<br>8826.00 MHz |
| 3.9            | 15.203 &<br>15.247(b) | A8.4      | Antenna Requirement           | N/A                                    | Pass   | -                                        |



## REVISION HISTORY

| REPORT NO.   | VERSION | DESCRIPTION             | ISSUED DATE   |
|--------------|---------|-------------------------|---------------|
| FR8O3027-02B | Rev. 01 | Initial issue of report | Mar. 19, 2009 |
|              |         |                         |               |
|              |         |                         |               |
|              |         |                         |               |
|              |         |                         |               |
|              |         |                         |               |
|              |         |                         |               |
|              |         |                         |               |
|              |         |                         |               |
|              |         |                         |               |
|              |         |                         |               |
|              |         |                         |               |
|              |         |                         |               |
|              |         |                         |               |
|              |         |                         |               |

# 1 General Description

## 1.1 Applicant

Symbol Technologies, Inc., A Motorola Company

230 Victoria Street #12-06/10 Bugis Junction Office Tower Singapore 188024

## 1.2 Manufacturer

Inventec Appliances Corp.

No. 37, Wugong 5th Road, Wugu Industrial Park, Taipei Country 248, Taiwan, R.O.C.

## 1.3 Feature of Equipment Under Test

| Product Feature & Specification   |                                                                                                      |
|-----------------------------------|------------------------------------------------------------------------------------------------------|
| Equipment                         | Mobile Computer                                                                                      |
| Brand Name                        | Symbol                                                                                               |
| Model Name                        | FR6076                                                                                               |
| Tx/Rx Frequency Range             | 2400 MHz ~ 2483.5 MHz                                                                                |
| Number of Channels                | 79                                                                                                   |
| Carrier Frequency of Each Channel | 2402+n*1 MHz; n=0~78                                                                                 |
| Channel Spacing                   | 1 MHz                                                                                                |
| Maximum Output Power to Antenna   | Bluetooth : 3.06 dBm (1Mbps)<br>Bluetooth EDR : 3.07dBm (2Mbps) /<br>3.31dBm (3Mbps)                 |
| Antenna Type                      | PIFA Antenna with gain -4 dBi                                                                        |
| Antenna Connector Type            | N/A                                                                                                  |
| HW Version                        | DVT                                                                                                  |
| SW Version                        | Modem: 0029-010709-M<br>OS: Handy-DVT1-0.31.0057-020209-WWE-H                                        |
| Type of Modulation                | Bluetooth (1Mbps) : GFSK<br>Bluetooth EDR (2Mbps) : $\pi/4$ -DQPSK<br>Bluetooth EDR (3Mbps) : 8-DPSK |
| EUT Stage                         | Identical Prototype                                                                                  |

**Accessories List:**

|                                 |                         |                                                    |
|---------------------------------|-------------------------|----------------------------------------------------|
| <b>Cradle</b>                   | <b>Brand Name</b>       | Symbol                                             |
|                                 | <b>Model Name</b>       | CRD7X00-1                                          |
|                                 | <b>Power Rating</b>     | 12Vdc, 3.33A                                       |
| <b>Cradle Adapter</b>           | <b>Brand Name</b>       | HIPRO                                              |
|                                 | <b>Model Name</b>       | HP-O2040D43                                        |
|                                 | <b>Power Rating</b>     | I/P: 100-240Vac, 50-60Hz, 1.5A; O/P: 12V, 3.33A    |
|                                 | <b>Power Cord Type</b>  | 1.8 meter shielded cable with ferrite core         |
| <b>Product Charging Adapter</b> | <b>Brand Name</b>       | MOTOROLA                                           |
|                                 | <b>Model Name</b>       | EADP-16BB A                                        |
|                                 | <b>Power Rating</b>     | I/P: 100-240Vac, 50-60Hz, 0.4A; O/P: 5.4V, 3A      |
| <b>Product Charging Cable 1</b> | <b>Power Cord Type</b>  | 1.83 meter shielded cable without ferrite core     |
|                                 | <b>Brand Name</b>       | MOTOROLA                                           |
|                                 | <b>Part Number</b>      | 25-102775-01R                                      |
|                                 | <b>Power Rating</b>     | I/P: 5.4V, 3A                                      |
| <b>Product Charging Cable 2</b> | <b>Power Cord Type</b>  | 1.35 meter non-shielded cable with ferrite core    |
|                                 | <b>Brand Name</b>       | MOTOROLA                                           |
|                                 | <b>Part Number</b>      | 25-118708-01R                                      |
|                                 | <b>Power Rating</b>     | I/P: 5.4V, 3A                                      |
| <b>Battery</b>                  | <b>Power Cord Type</b>  | 1.35 meter non-shielded cable with ferrite core    |
|                                 | <b>Brand Name</b>       | MOTOROLA                                           |
|                                 | <b>Part Number</b>      | 82-71364-05                                        |
|                                 | <b>Power Rating</b>     | 3.7Vdc, 3600mAh, 13.3Wh                            |
| <b>Earphone</b>                 | <b>Type</b>             | Li-ion                                             |
|                                 | <b>Brand Name</b>       | Symbol                                             |
|                                 | <b>Part Number</b>      | 90-17C28-001R                                      |
| <b>USB Cable</b>                | <b>Signal Line Type</b> | 1.24 meter non-shielded cable without ferrite core |
|                                 | <b>Brand Name</b>       | MOTOROLA                                           |
|                                 | <b>Part Number</b>      | 25-68596-01R                                       |
| <b>USB Cable</b>                | <b>Type</b>             | 1.58 meter shielded cable without ferrite core     |

**Remark:**

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. This test report recorded only product characteristics and test results of Digital Spread Spectrum (DSS).
3. For accessories equipped with this EUT, please refer to the appendix of the external photo.
4. Product Charging Cable 1 (P/N: 25-102775-01R) and Product Charging Cable 2 (P/N: 25-118708-01R) are exactly the same which was declared by the manufacturer, and only Product Charging Cable 1 (P/N: 25-102775-01R) was performed on all the tests.

## 1.4 Testing Site

|                           |                                                                                                                                                             |           |                                |
|---------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|--------------------------------|
| <b>Test Site</b>          | SPORTON INTERNATIONAL INC.                                                                                                                                  |           |                                |
| <b>Test Site Location</b> | No. 52, Hwa Ya 1 <sup>st</sup> Rd., Hwa Ya Technology Park,<br>Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C<br>TEL: +886-3-3273456 / FAX: +886-3-3284978 |           |                                |
| <b>Test Site No.</b>      | <b>Sporton Site No.</b>                                                                                                                                     |           | <b>FCC/IC Registration No.</b> |
|                           | CO05-HY                                                                                                                                                     | 03CH07-HY | TW1022/4086B-1                 |

## 1.5 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart C §15.247
- FCC Public Notice DA 00-705
- ANSI C63.4-2003
- IC RSS-210 Issue 7

### Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B (DoC), recorded in a separate test report.

## 1.6 Ancillary Equipment List

| Equipment          | Brand Name | Model Name  | FCC ID            | Data Cable        | Power Cord                                                 |
|--------------------|------------|-------------|-------------------|-------------------|------------------------------------------------------------|
| System Simulator   | R&S        | CMU200      | N/A               | N/A               | Unshielded, 1.8 m                                          |
| BT Base Station    | Anritsu    | 8852B       | N/A               | N/A               | Unshielded, 1.8 m                                          |
| WLAN AP            | D-Link     | DWL-7100AP  | KA22003040018-1   | N/A               | Unshielded, 1.8 m                                          |
| GPS Station        | SPIRENT    | GSS4200     | N/A               | N/A               | Unshielded, 1.8 m                                          |
| Notebook           | DELL       | Vostro 1510 | FCC DoC           | N/A               | AC I/P:<br>Unshielded, 1.2 m<br>DC O/P:<br>Shielded, 1.8 m |
| LCD Monitor        | Lenovo     | 6135-AB1    | FCC DoC           | N/A               | Unshielded, 1.8m                                           |
| Bluetooth Earphone | Cellink    | BTHS-6025-F | PQY-4710874200357 | N/A               | N/A                                                        |
| i-pod              | Apple      | A1199       | FCC DoC           | Unshielded, 1.0 m | N/A                                                        |

## 2 Test Configuration of Equipment Under Test

### 2.1 Pre-Scanned RF Power

Preliminary tests were performed in different data rate and recorded the RF output power in the following table:

| RF Output Power |           |                        |                |                 |
|-----------------|-----------|------------------------|----------------|-----------------|
| Channel         | Frequency | Data Rate / Modulation |                |                 |
|                 |           | GFSK                   | $\pi/4$ -DQPSK | 8-DPSK          |
|                 |           | 1Mbps                  | 2Mbps          | 3Mbps           |
| Ch00            | 2402MHz   | 3.06 dBm               | 3.07 dBm       | <b>3.31 dBm</b> |
| Ch39            | 2441MHz   | 2.89 dBm               | 2.57 dBm       | 2.62 dBm        |
| Ch78            | 2480MHz   | 2.02 dBm               | 1.53 dBm       | 1.84 dBm        |

**Remark:** The EUT is programmed to transmit signal continuously for all testing.

## 2.2 Test Mode


The EUT has been associated with peripherals pursuant to ANSI C63.4-2003 and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction (150 kHz to 30 MHz), radiation (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). Pre-scanned tests were conducted to determine the final configuration from all possible combinations. The following tables are showing the test modes as the worst cases and recorded in this report.

| Test Cases                                                                                                                             |                                                                                                                                                                                                                                                                                                      |                                                                               |                                                                               |
|----------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------|-------------------------------------------------------------------------------|
| Test Item                                                                                                                              | Modulation                                                                                                                                                                                                                                                                                           |                                                                               |                                                                               |
|                                                                                                                                        | Bluetooth 1Mbps<br>GFSK                                                                                                                                                                                                                                                                              | Bluetooth EDR 2Mbps<br>$\pi/4$ -DQPSK                                         | Bluetooth EDR 3Mbps<br>8-DPSK                                                 |
| Conducted<br>TCs                                                                                                                       | ■ Mode 1: CH00_2402 MHz<br>■ Mode 2: CH39_2441 MHz<br>■ Mode 3: CH78_2480 MHz                                                                                                                                                                                                                        | ■ Mode 4: CH00_2402 MHz<br>■ Mode 5: CH39_2441 MHz<br>■ Mode 6: CH78_2480 MHz | ■ Mode 7: CH00_2402 MHz<br>■ Mode 8: CH39_2441 MHz<br>■ Mode 9: CH78_2480 MHz |
| Radiated TCs                                                                                                                           | N/A                                                                                                                                                                                                                                                                                                  | N/A                                                                           | ■ Mode 1: CH00_2402 MHz<br>■ Mode 2: CH39_2441 MHz<br>■ Mode 3: CH78_2480 MHz |
| AC<br>Conducted<br>Emission                                                                                                            | Mode 1 : GSM 850 Idle + GPS Rx + BT Link + WLAN Link + Earphone + Cradle + Adapter + USB Cable<br>Mode 2 : GSM 850 Idle + GPS Rx + BT Link + WLAN Link + Earphone + USB Charging Cable with AC Power<br>Mode 3 : WCDMA Idle + GPS Rx + BT Link + WLAN Link + Earphone + Cradle + Adapter + USB Cable |                                                                               |                                                                               |
| Remark:<br><br>1. The worst case of radiated emission was Bluetooth EDR 3Mbps link mode; only the test data of this mode was reported. |                                                                                                                                                                                                                                                                                                      |                                                                               |                                                                               |


### 2.3 Connection Diagram of Test System


**<Conducted Emission>**

### EUT with Cradle Mode

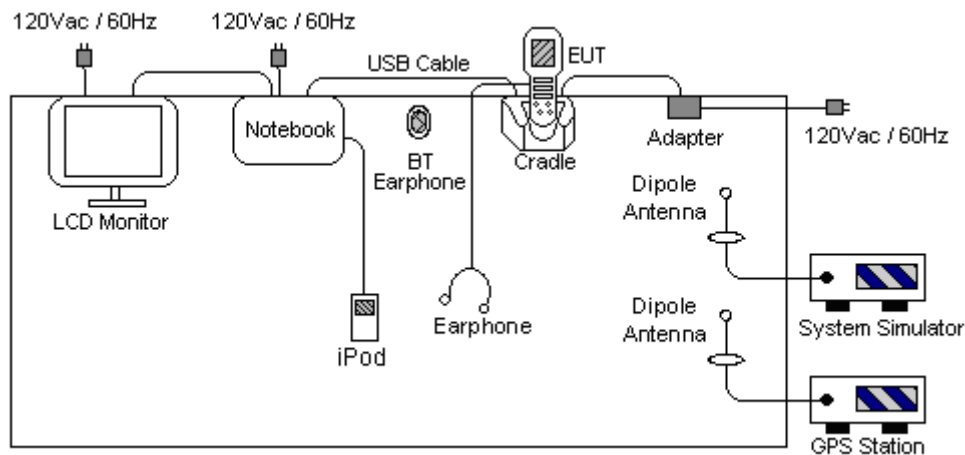

### EUT with USB Charging cable Mode

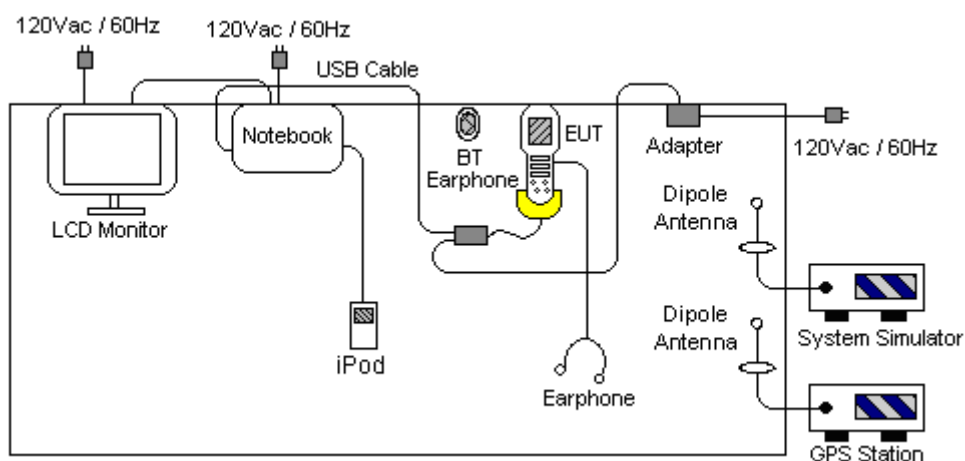

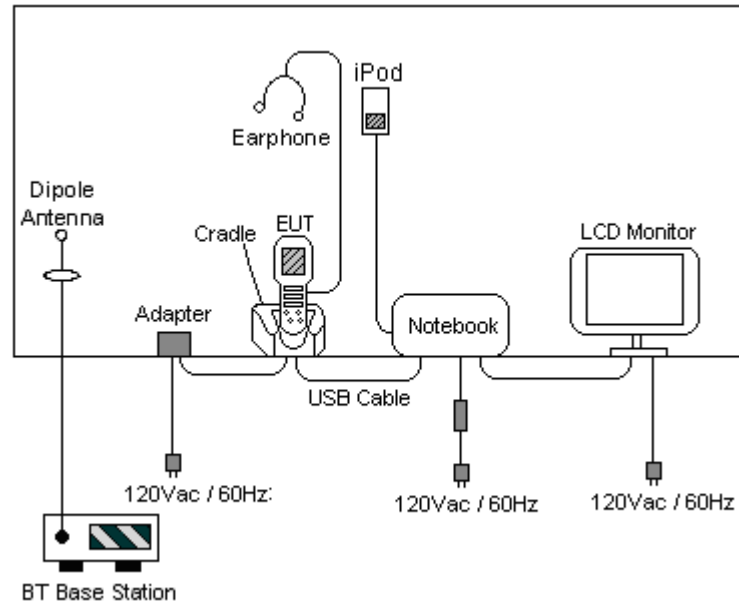**<Radiated Emission>**


## 2.4 RF Utility

For Bluetooth function, the RF Utility, "BT Test ON" was installed in EUT which was programmed in order to make the EUT into the engineering modes to contact with BT base station for transmitting and receiving signals continuously.

### 3 Test Result

#### 3.1 Number of Channel Measurement

##### 3.1.1 Limits of Number of Hopping Frequency

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.


##### 3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

##### 3.1.3 Test Procedure

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. The modulation types of EUT are irrelevant to number of hopping channels deviation.
4. The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:  
Span = the frequency band of operation;  $RBW \geq 1\%$  of the span;  $VBW \geq RBW$ ; Sweep = auto;  
Detector function = peak; Trace = max hold.
5. The number of hopping frequency used is defined as the device has the numbers of total channel.


##### 3.1.4 Test Setup

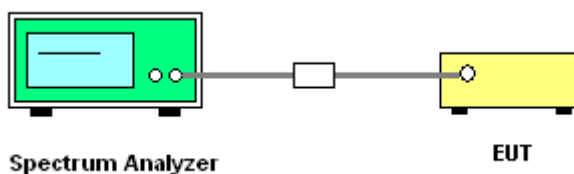

### 3.1.5 Test Result of Number of Hopping Frequency


| Test Mode :                          | Mode 1, 2, 3 | Temperature :       | 23~24℃    |
|--------------------------------------|--------------|---------------------|-----------|
| Test Engineer :                      | Eric Hum     | Relative Humidity : | 40~41%    |
| Number of Hopping Channels (Channel) |              | Limits (Channel)    | Pass/Fail |
| 79                                   |              | > 15                | Pass      |

**Number of Hopping Channel Plot on Channel 00 - 78**

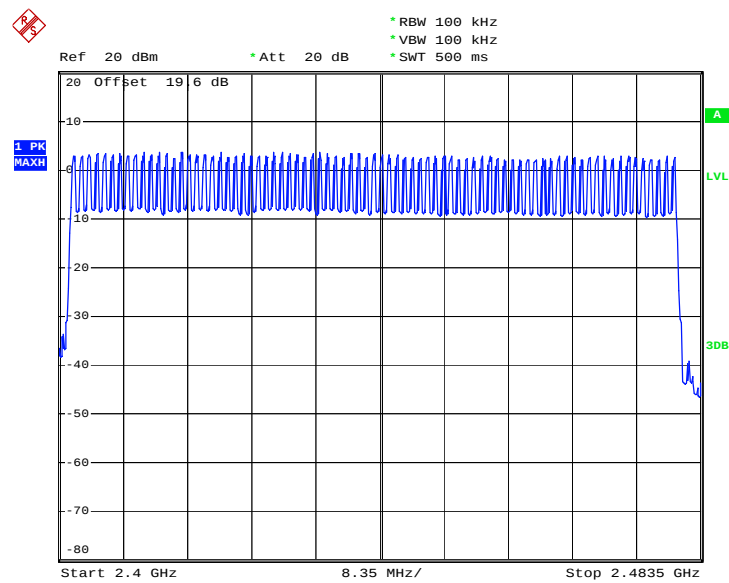


Date: 7.OCT.2008 19:43:08

|                                             |              |                            |                  |
|---------------------------------------------|--------------|----------------------------|------------------|
| <b>Test Mode :</b>                          | Mode 4, 5, 6 | <b>Temperature :</b>       | 26~27°C          |
| <b>Test Engineer :</b>                      | Ken Hsu      | <b>Relative Humidity :</b> | 52~53%           |
| <b>Number of Hopping Channels (Channel)</b> |              | <b>Limits (Channel)</b>    | <b>Pass/Fail</b> |
| 79                                          |              | > 15                       | Pass             |

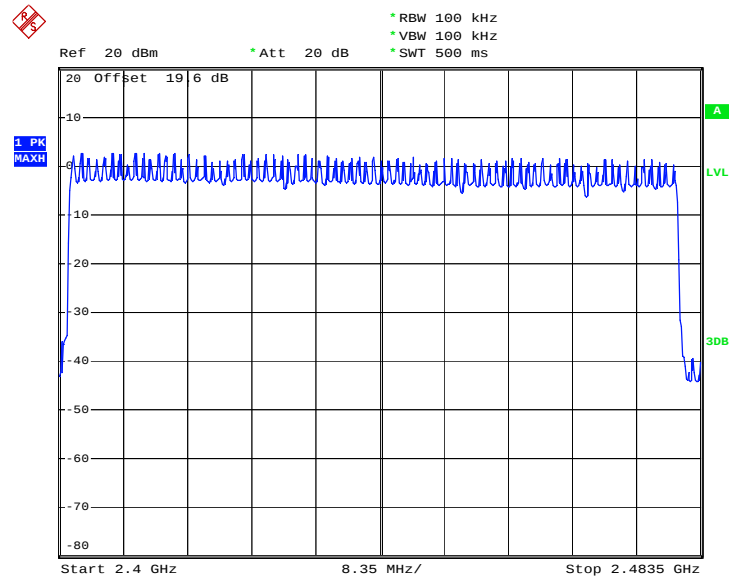**Number of Hopping Channel Plot on Channel 00 - 78**


Date: 7.OCT.2008 19:47:45

| Test Mode :                             | Mode 7, 8, 9 | Temperature :       | 26~27°C   |
|-----------------------------------------|--------------|---------------------|-----------|
| Test Engineer :                         | Ken Hsu      | Relative Humidity : | 52~53%    |
| Number of Hopping Channels<br>(Channel) |              | Limits<br>(Channel) | Pass/Fail |
| 79                                      |              | > 15                | Pass      |

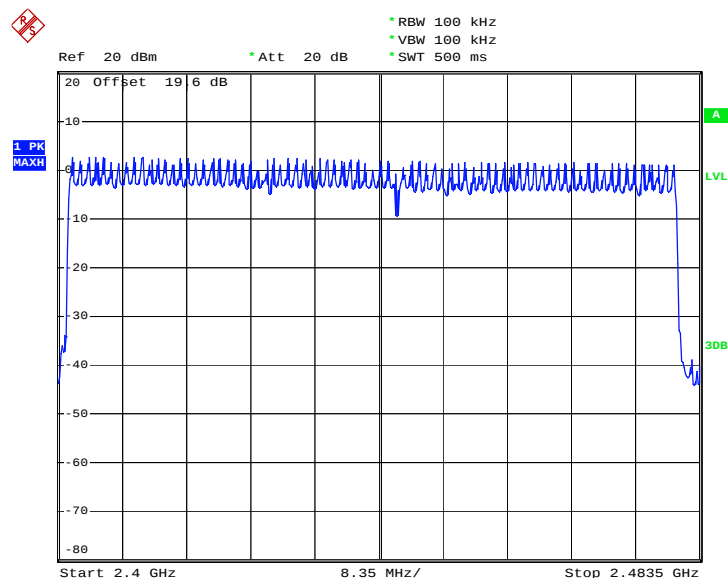**Number of Hopping Channel Plot on Channel 00 - 78**


Date: 7.OCT.2008 19:52:20

## 3.2 20dB Bandwidth Measurement

### 3.2.1 Limit of 20dB Bandwidth

N/A


### 3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

### 3.2.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. The EUT should be transmitting at its maximum data rate as the worst cases.
4. Use the following spectrum analyzer settings:  
Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel;  
RBW  $\geq$  1% of the 20 dB bandwidth; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak;  
Trace = max hold.
5. The marker-delta reading at this point is the 20 dB bandwidth of the emission.

### 3.2.4 Test Setup

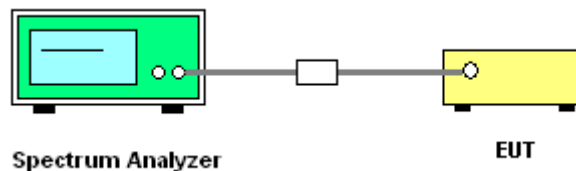


### 3.2.5 Test Result of 20dB Bandwidth


|                 |              |                     |         |
|-----------------|--------------|---------------------|---------|
| Test Mode :     | Mode 1, 2, 3 | Temperature :       | 23~24°C |
| Test Engineer : | Eric Hum     | Relative Humidity : | 40~41%  |

| Channel | Frequency (MHz) | 20dB Bandwidth (MHz) |
|---------|-----------------|----------------------|
| 00      | 2402            | 0.800                |
| 39      | 2441            | 0.800                |
| 78      | 2480            | 0.798                |


**20 dB Bandwidth Plot on Channel 00**

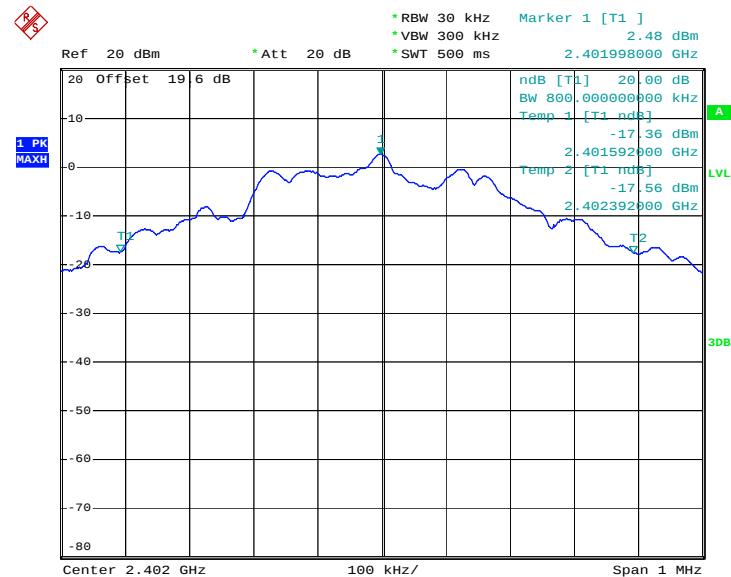

Date: 7.OCT.2008 18:46:17

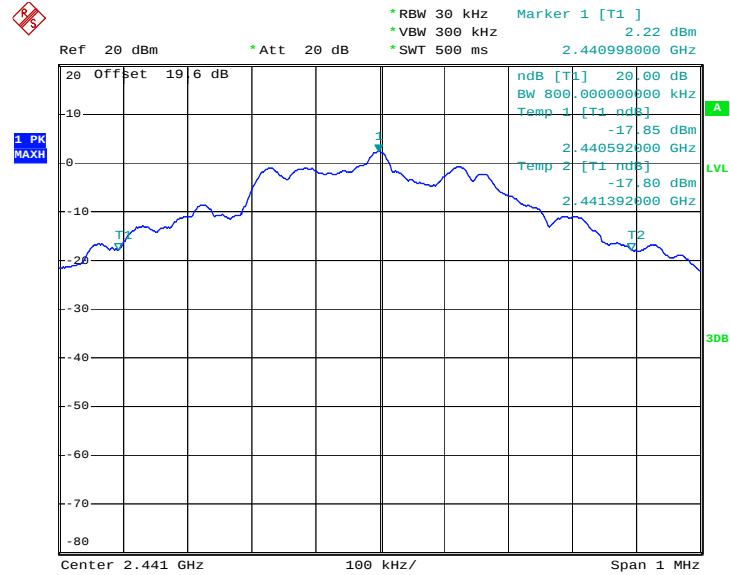**20 dB Bandwidth Plot on Channel 39**


Date: 7.OCT.2008 18:46:33

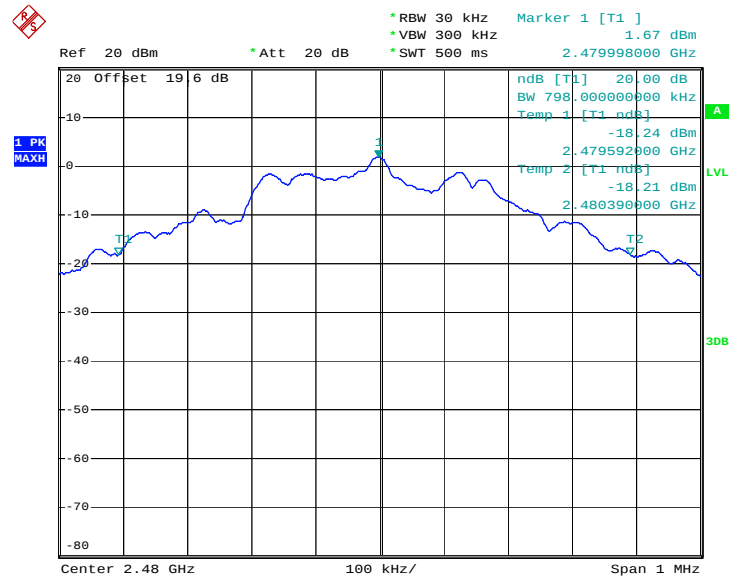
**20 dB Bandwidth Plot on Channel 78**


Date: 7.OCT.2008 18:46:52




|                 |              |                     |         |
|-----------------|--------------|---------------------|---------|
| Test Mode :     | Mode 4, 5, 6 | Temperature :       | 23~24°C |
| Test Engineer : | Eric Hum     | Relative Humidity : | 40~41%  |


| Channel | Frequency (MHz) | 20dB Bandwidth (MHz) |
|---------|-----------------|----------------------|
| 00      | 2402            | 1.216                |
| 39      | 2441            | 1.216                |
| 78      | 2480            | 1.216                |

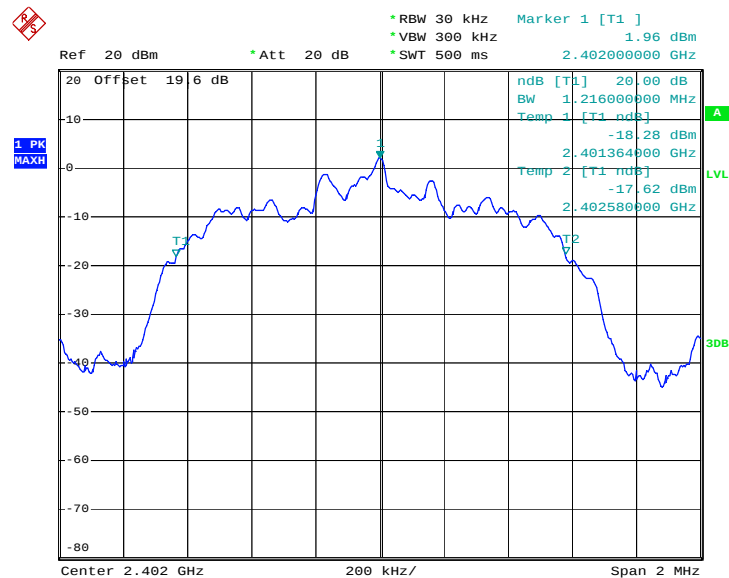**20 dB Bandwidth Plot on Channel 00**

Date: 7.OCT.2008 18:47:53

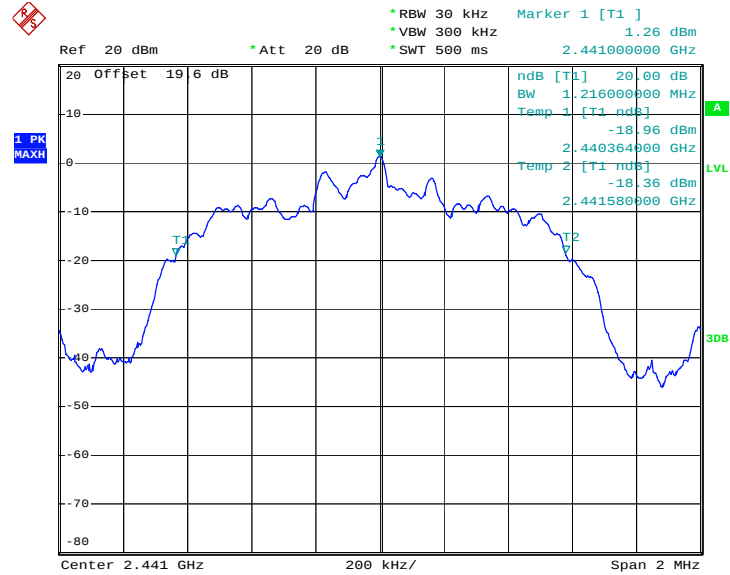**20 dB Bandwidth Plot on Channel 39**


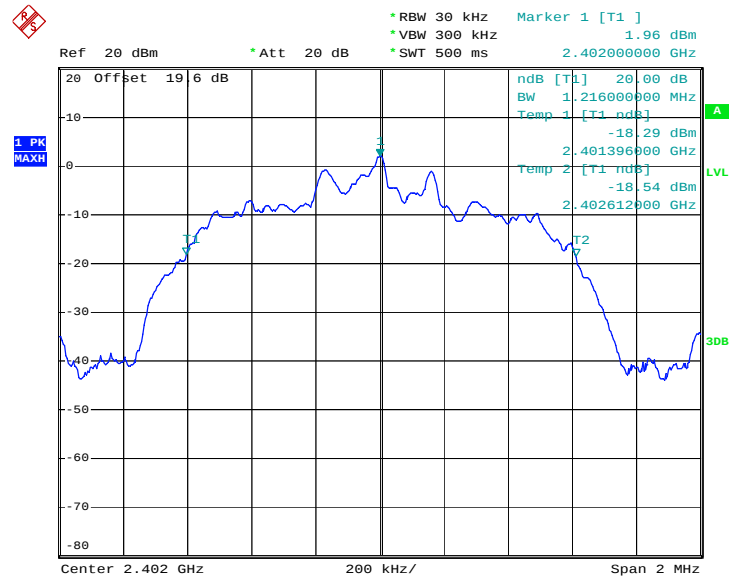
Date: 7.OCT.2008 18:47:35

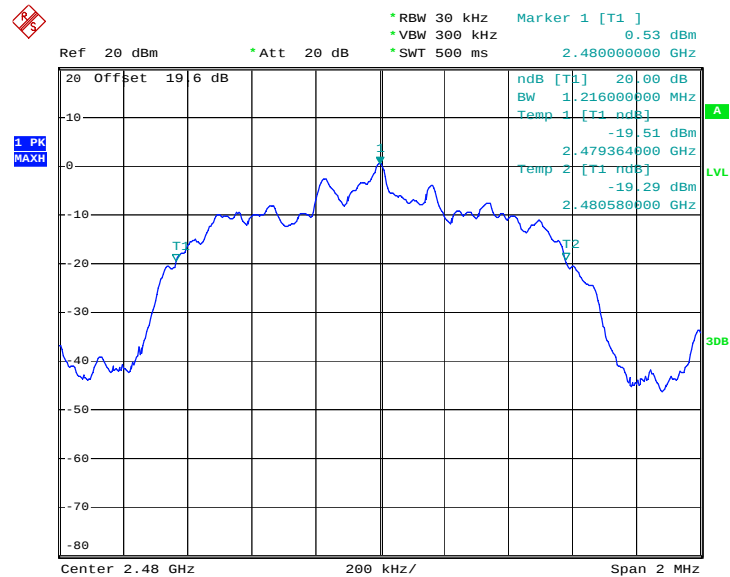**20 dB Bandwidth Plot on Channel 78**


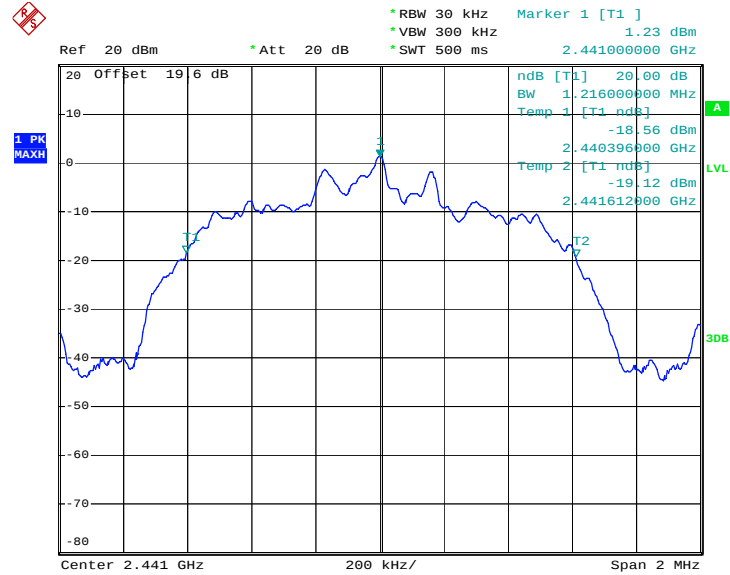
Date: 7.OCT.2008 18:47:16

|                        |              |                            |         |
|------------------------|--------------|----------------------------|---------|
| <b>Test Mode :</b>     | Mode 7, 8, 9 | <b>Temperature :</b>       | 23~24°C |
| <b>Test Engineer :</b> | Eric Hum     | <b>Relative Humidity :</b> | 40~41%  |


| Channel | Frequency (MHz) | 20dB Bandwidth (MHz) |
|---------|-----------------|----------------------|
| 00      | 2402            | 1.216                |
| 39      | 2441            | 1.216                |
| 78      | 2480            | 1.216                |

**20 dB Bandwidth Plot on Channel 00**


Date: 7.OCT.2008 18:48:11

**20 dB Bandwidth Plot on Channel 39**


Date: 7.OCT.2008 18:48:32

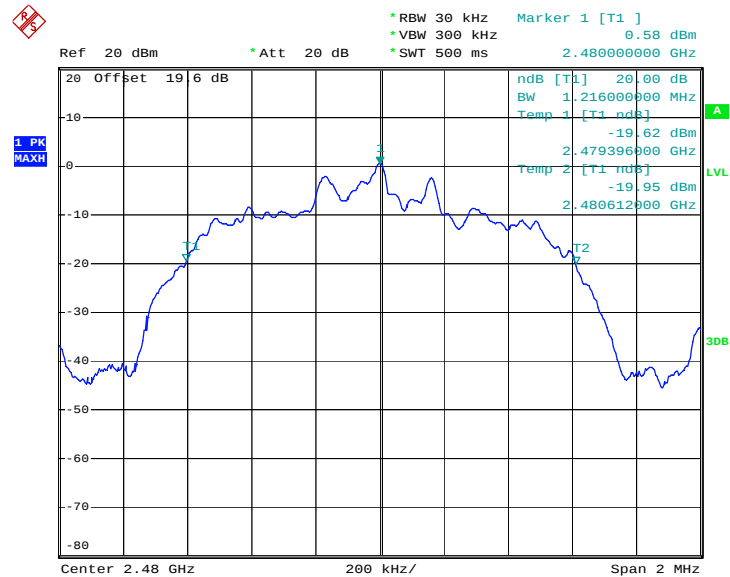**20 dB Bandwidth Plot on Channel 78**


Date: 7.OCT.2008 18:48:51

### 3.3 Hopping Channel Separation Measurement

#### 3.3.1 Limit of Hopping Channel Separation

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.


#### 3.3.2 Measuring Instruments

See list of measuring instruments of this test report.

#### 3.3.3 Test Procedures

1. Please refer FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. The EUT should be transmitting at its maximum data rate as the worst cases.
4. Use the following spectrum analyzer settings:  
Span = wide enough to capture the peaks of two adjacent channels;  $RBW \geq 1\%$  of the span;  
 $VBW \geq RBW$ ; Sweep = auto; Detector function = peak; Trace = max hold.
5. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

#### 3.3.4 Test Setup

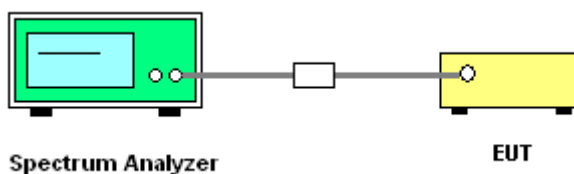


### 3.3.5 Test Result of Hopping Channel Separation

|                 |              |                     |        |
|-----------------|--------------|---------------------|--------|
| Test Mode :     | Mode 1, 2, 3 | Temperature :       | 23~24℃ |
| Test Engineer : | Eric Hum     | Relative Humidity : | 40~41% |


  

| Channel | Frequency (MHz) | Frequency Separation (MHz) | (2/3 of 20dB BW) Limits (MHz) | Pass/Fail |
|---------|-----------------|----------------------------|-------------------------------|-----------|
| 00      | 2402            | 1.004                      | 0.533                         | Pass      |
| 39      | 2441            | 1.004                      | 0.533                         | Pass      |
| 78      | 2480            | 1.004                      | 0.532                         | Pass      |


**Channel Separation Plot on Channel 00 - 01**

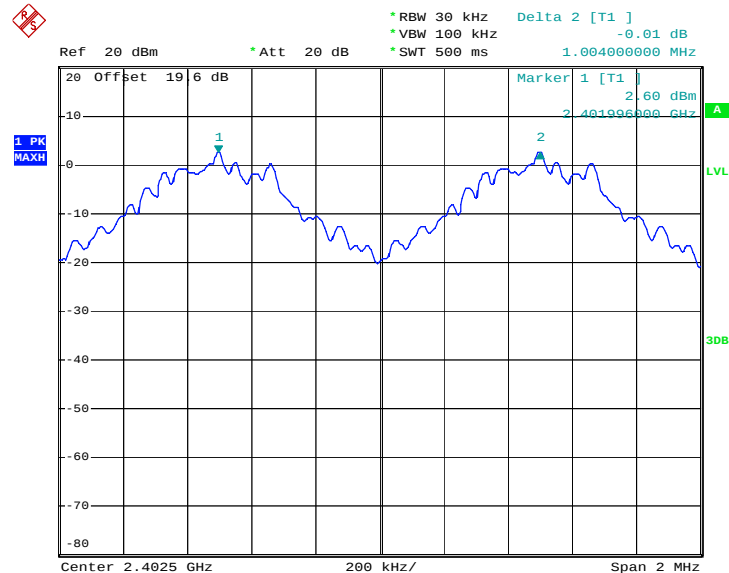

Date: 7.OCT.2008 19:20:49

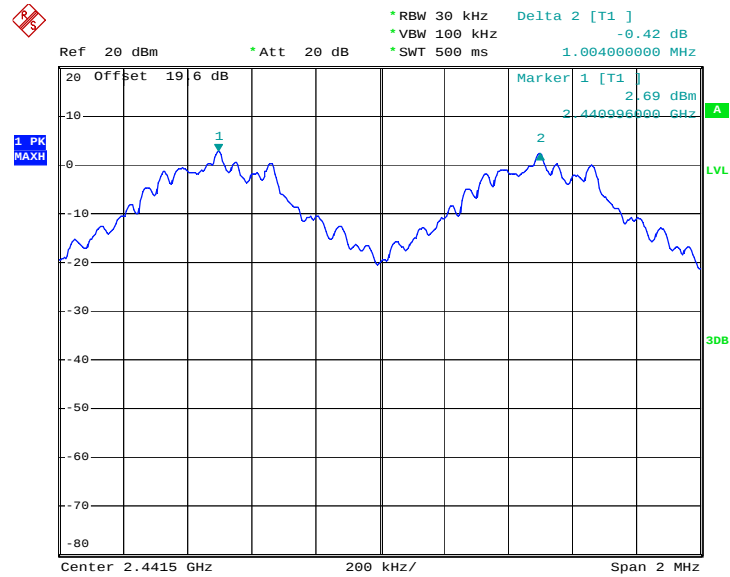**Channel Separation Plot on Channel 39 - 40**


Date: 7.OCT.2008 19:21:11

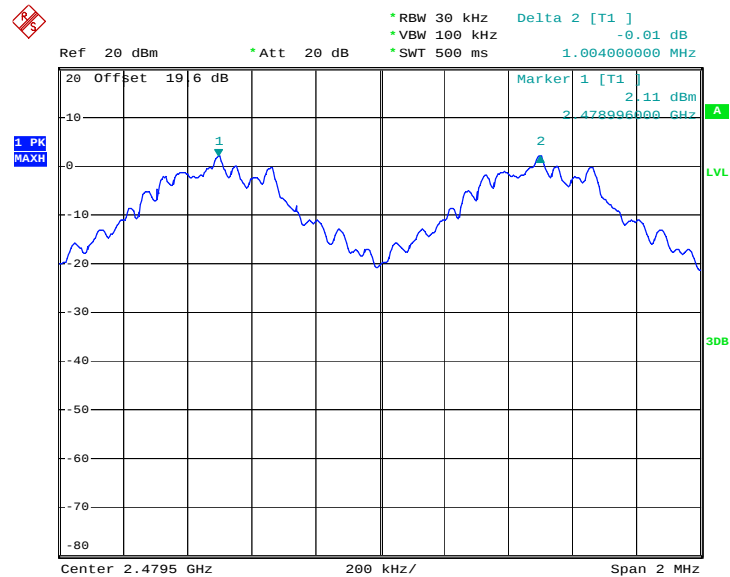**Channel Separation Plot on Channel 77 - 78**


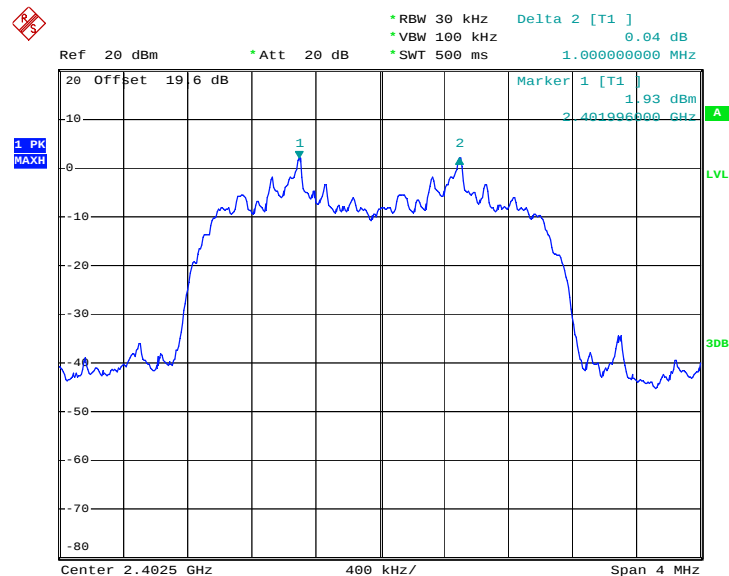
Date: 7.OCT.2008 19:21:36




|                        |              |                            |         |
|------------------------|--------------|----------------------------|---------|
| <b>Test Mode :</b>     | Mode 4, 5, 6 | <b>Temperature :</b>       | 23~24°C |
| <b>Test Engineer :</b> | Eric Hum     | <b>Relative Humidity :</b> | 40~41%  |

| Channel | Frequency (MHz) | Frequency Separation (MHz) | (2/3 of 20dB BW) Limits (MHz) | Pass/Fail |
|---------|-----------------|----------------------------|-------------------------------|-----------|
| 00      | 2402            | 1.000                      | 0.811                         | Pass      |
| 39      | 2441            | 1.008                      | 0.811                         | Pass      |
| 78      | 2480            | 1.008                      | 0.811                         | Pass      |


**Channel Separation Plot on Channel 00 - 01**



Date: 7.OCT.2008 19:26:40

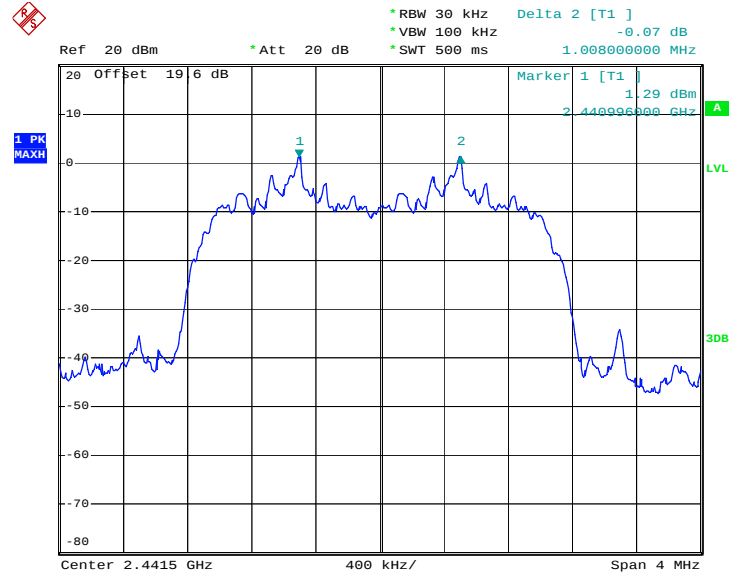**Channel Separation Plot on Channel 39 - 40**


Date: 7.OCT.2008 19:27:02

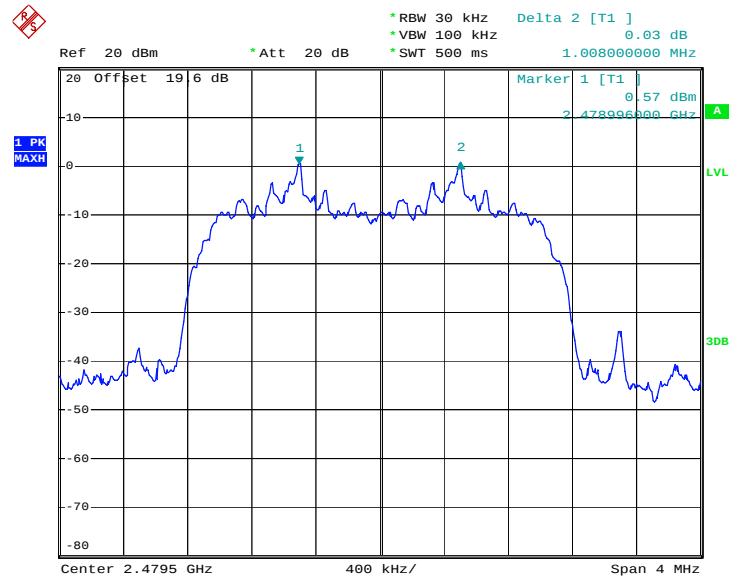
**Channel Separation Plot on Channel 77 - 78**


Date: 7.OCT.2008 19:27:28



|                 |              |                     |         |
|-----------------|--------------|---------------------|---------|
| Test Mode :     | Mode 7, 8, 9 | Temperature :       | 23~24°C |
| Test Engineer : | Eric Hum     | Relative Humidity : | 40~41%  |


| Channel | Frequency (MHz) | Frequency Separation (MHz) | (2/3 of 20dB BW) Limits (MHz) | Pass/Fail |
|---------|-----------------|----------------------------|-------------------------------|-----------|
| 00      | 2402            | 1.008                      | 0.811                         | Pass      |
| 39      | 2441            | 1.000                      | 0.811                         | Pass      |
| 78      | 2480            | 1.008                      | 0.811                         | Pass      |

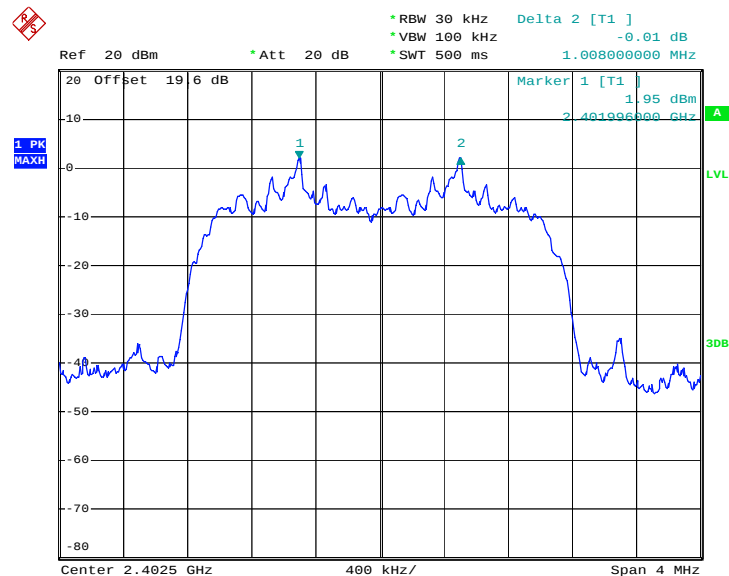**Channel Separation Plot on Channel 00 - 01**

Date: 7.OCT.2008 19:28:07




Channel Separation Plot on Channel 39 - 40

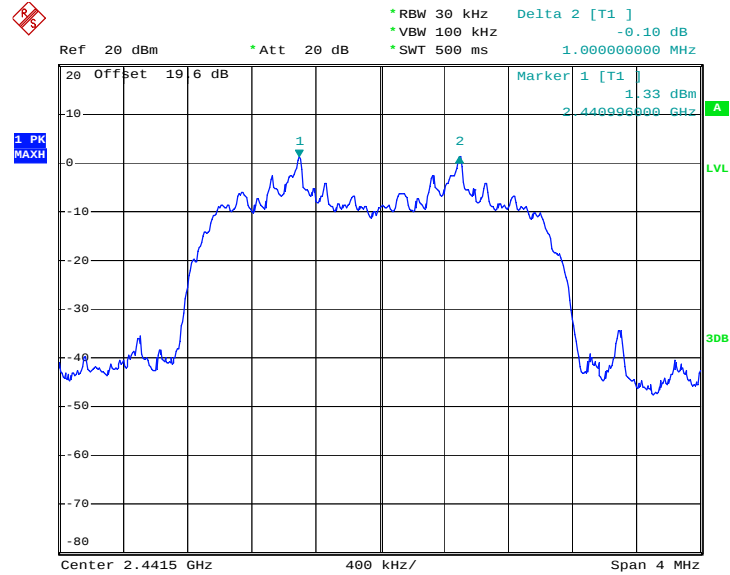

Date: 7.OCT.2008 19:28:27

Channel Separation Plot on Channel 77 - 78

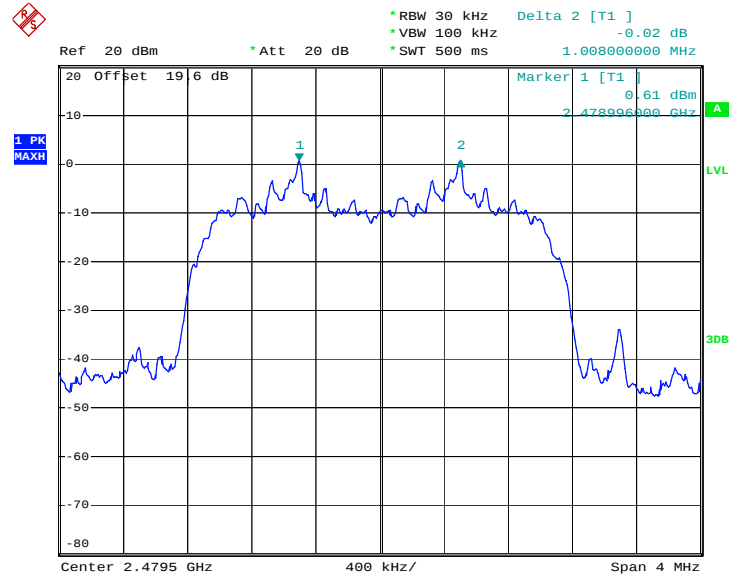

Date: 7.OCT.2008 19:28:50

### 3.4 Dwell Time Measurement

#### 3.4.1 Limit of Dwell Time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.


#### 3.4.2 Measuring Instruments

See list of measuring instruments of this test report.

#### 3.4.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. The EUT should be transmitting at its maximum data rate as the worst cases.
4. The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:  
Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW  $\geq$  RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold.
5. Use the marker-delta function to calculate the dwell time.

#### 3.4.4 Test Setup

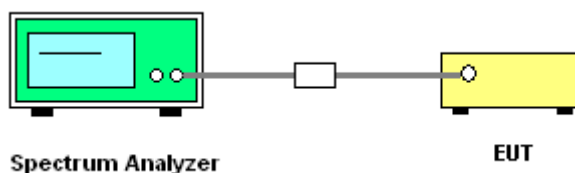


**3.4.5 Test Result of Dwell Time**

|                        |          |                            |        |
|------------------------|----------|----------------------------|--------|
| <b>Test Mode :</b>     | Mode 2   | <b>Temperature :</b>       | 23~24℃ |
| <b>Test Engineer :</b> | Eric Hum | <b>Relative Humidity :</b> | 40~41% |


| Package Mode | Average Hopping Channel | Package Transfer Time (usec) | Dwell Time (sec) | Limits (sec) | Pass/Fail |
|--------------|-------------------------|------------------------------|------------------|--------------|-----------|
| DH1          | 7.80                    | 436.00                       | 0.11             | 0.4          | Pass      |
| DH3          | 4.70                    | 1696.00                      | 0.25             | 0.4          | Pass      |
| DH5          | 3.00                    | 3016.00                      | 0.29             | 0.4          | Pass      |

**Remark:**


- 1.Dwell Time=79(channels) x 0.4(s) x average hopping channel x package transfer time
- 2.79 channels come from the Hopping Channel number.
- 3.Average Hopping Channel = hops/sweep time
- 4.t: Package Transfer Time(us)

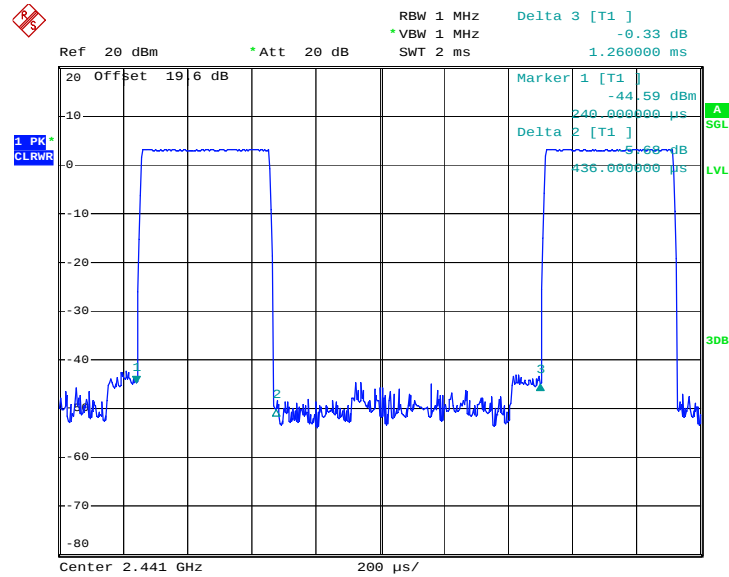**DH1 Dwell Time (One Pulse) Plot on Channel 39\_1Mbps**


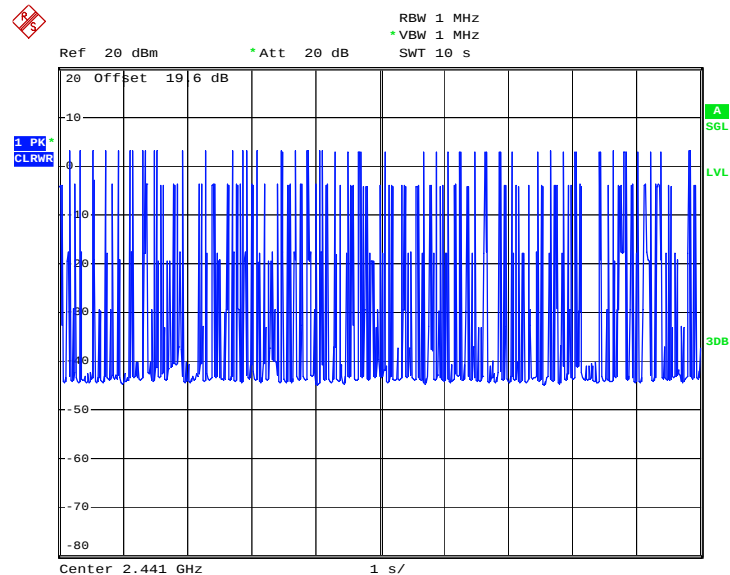
Date: 7.OCT.2008 19:29:43

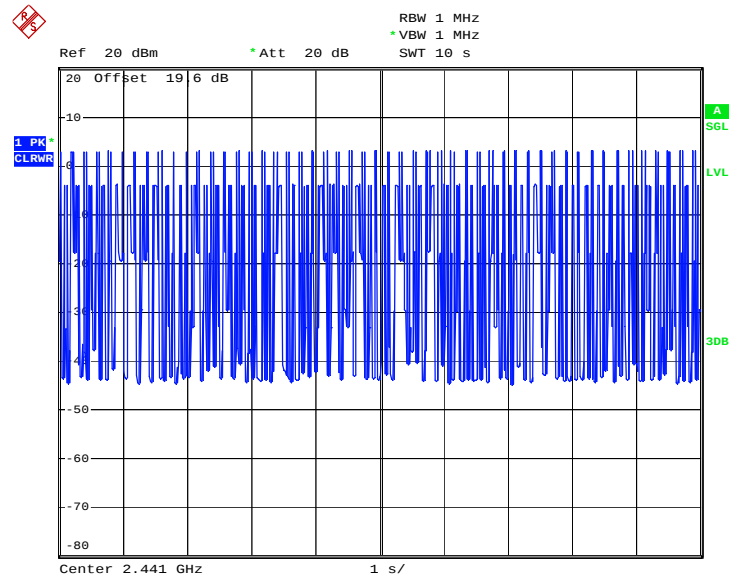**DH1 Dwell Time (Count Pulses) Plot on Channel 39\_1Mbps**


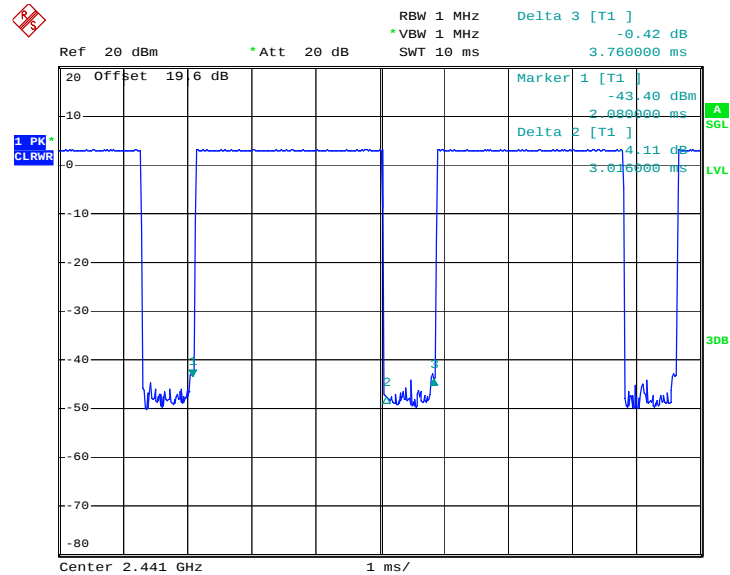
Date: 7.OCT.2008 19:34:26

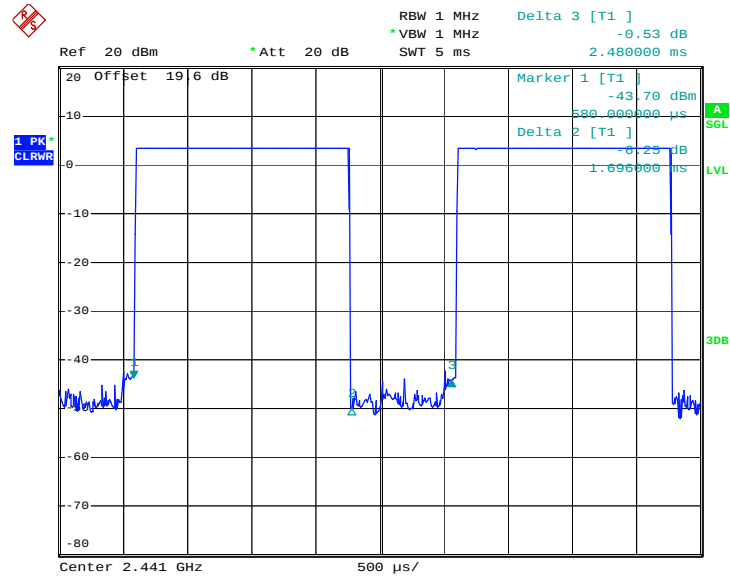**DH3 Dwell Time (One Pulse) Plot on Channel 39\_1Mbps**


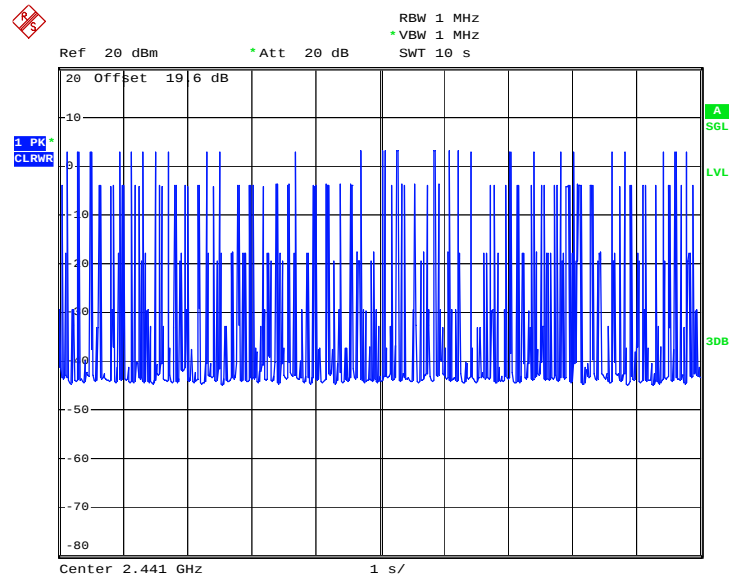
Date: 7.OCT.2008 19:30:23

**DH3 Dwell Time (Count Pulses) Plot on Channel 39\_1Mbps**


Date: 7.OCT.2008 19:34:44

**DH5 Dwell Time (One Pulse) Plot on Channel 39\_1Mbps**


Date: 7.OCT.2008 19:30:50

**DH5 Dwell Time (Count Pulses) Plot on Channel 39\_1Mbps**


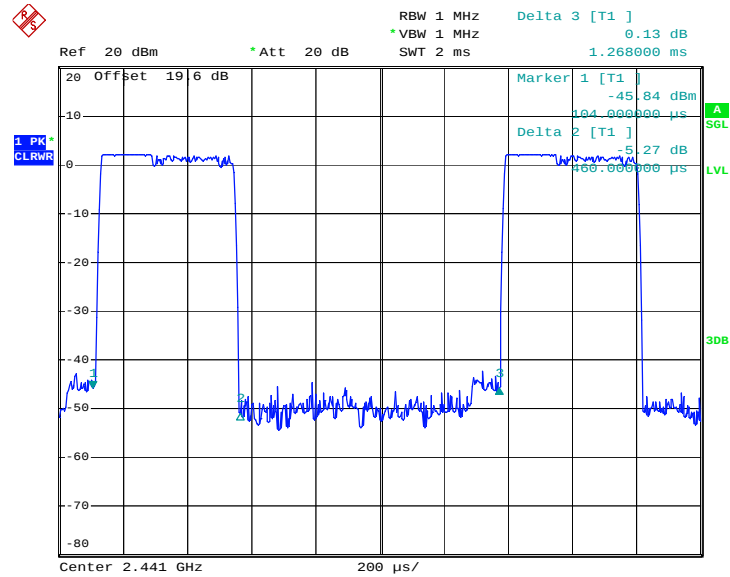
Date: 7.OCT.2008 19:35:06

|                        |          |                            |        |
|------------------------|----------|----------------------------|--------|
| <b>Test Mode :</b>     | Mode 5   | <b>Temperature :</b>       | 23~24℃ |
| <b>Test Engineer :</b> | Eric Hum | <b>Relative Humidity :</b> | 40~41% |


| Package Mode | Average Hopping Channel | Package Transfer Time (usec) | Dwell Time (sec) | Limits (sec) | Pass/Fail |
|--------------|-------------------------|------------------------------|------------------|--------------|-----------|
| DH1          | 7.90                    | 460.00                       | 0.12             | 0.4          | Pass      |
| DH3          | 4.60                    | 1740.00                      | 0.25             | 0.4          | Pass      |
| DH5          | 3.10                    | 2980.00                      | 0.29             | 0.4          | Pass      |

**Remark:**


1. Dwell Time = 79(channels) x 0.4(s) x average hopping channel x package transfer time
2. 79 channels come from the Hopping Channel number.
3. Average Hopping Channel = hops/sweep time
4. t: Package Transfer Time(us)

**DH1 Dwell Time (One Pulse) Plot on Channel 39\_2Mbps**


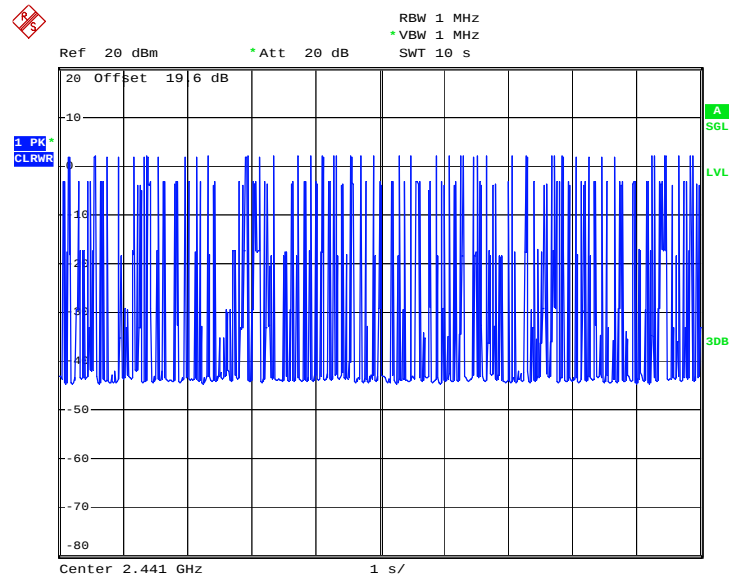
Date: 7.OCT.2008 19:31:24

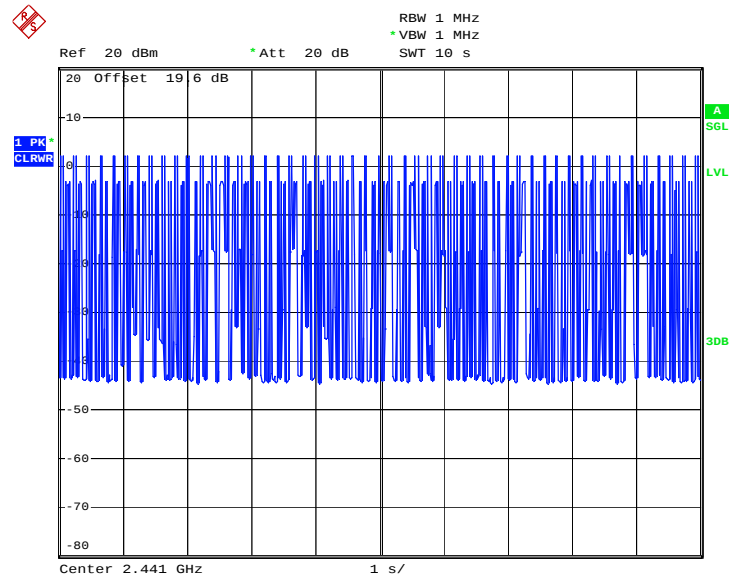**DH1 Dwell Time (Count Pulses) Plot on Channel 39\_2Mbps**


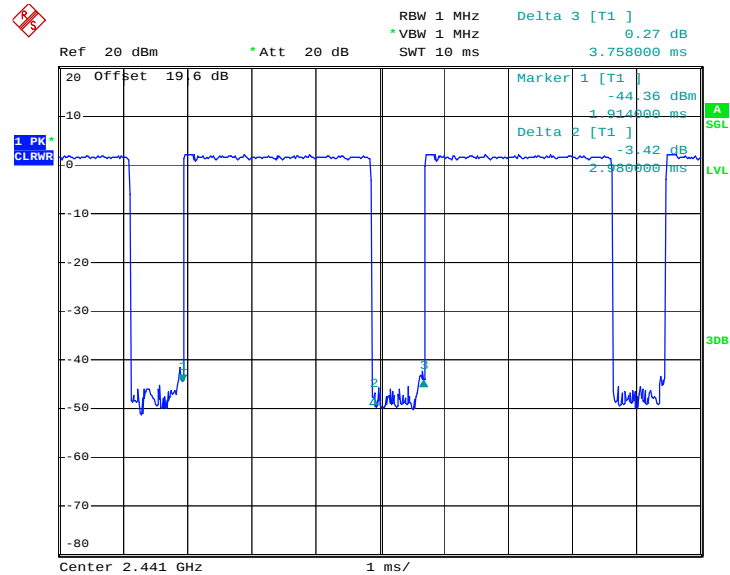
Date: 7.OCT.2008 19:35:24

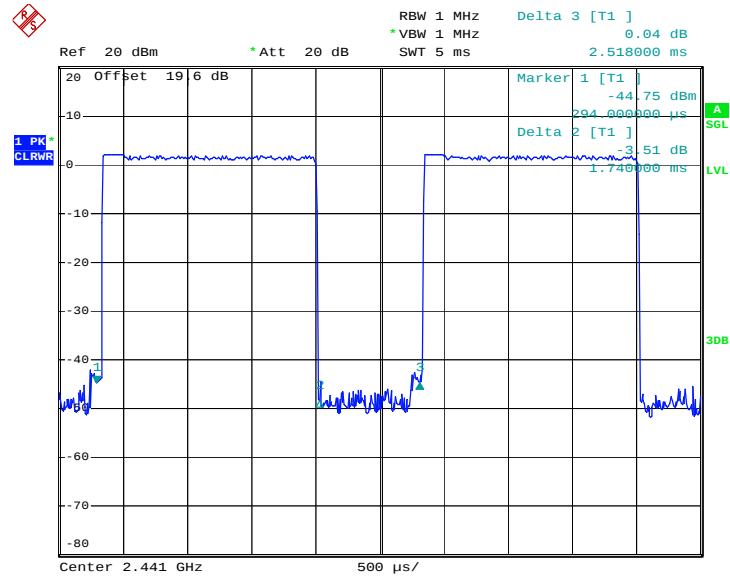**DH3 Dwell Time (One Pulse) Plot on Channel 39\_2Mbps**


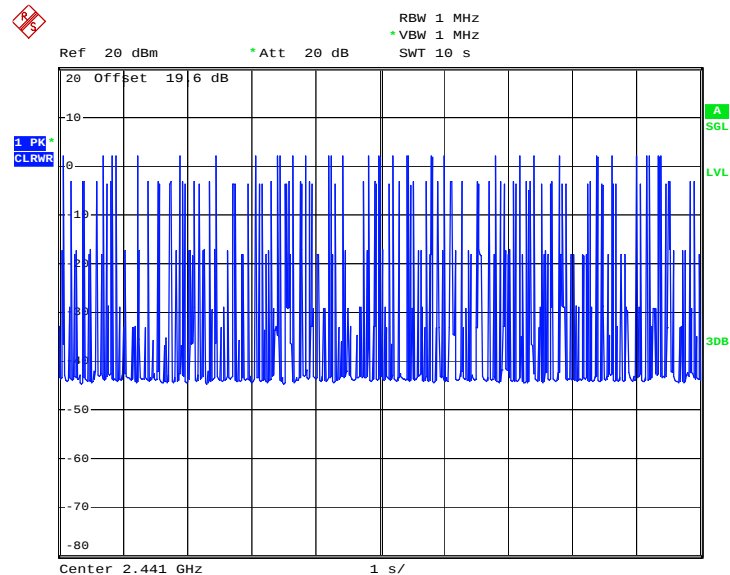
Date: 7.OCT.2008 19:31:50

**DH3 Dwell Time (Count Pulses) Plot on Channel 39\_2Mbps**


Date: 7.OCT.2008 19:35:44

**DH5 Dwell Time (One Pulse) Plot on Channel 39\_2Mbps**


Date: 7.OCT.2008 19:32:14

**DH5 Dwell Time (Count Pulses) Plot on Channel 39\_2Mbps**


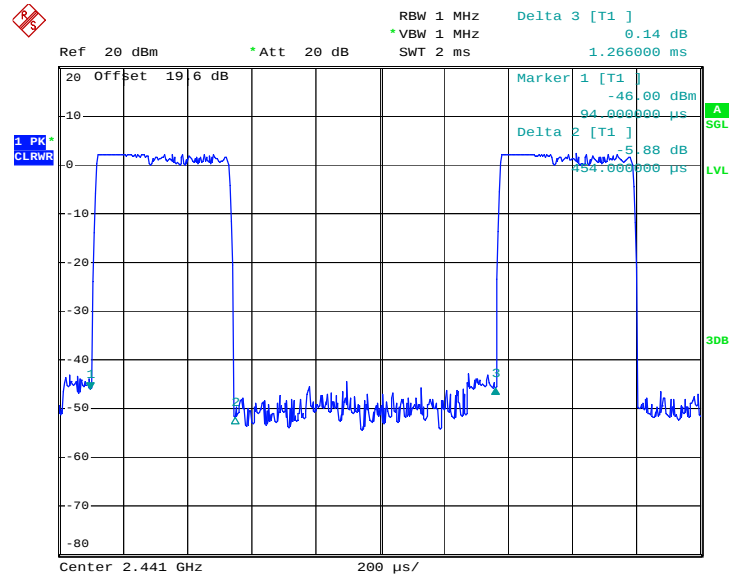
Date: 7.OCT.2008 19:36:03

|                        |          |                            |        |
|------------------------|----------|----------------------------|--------|
| <b>Test Mode :</b>     | Mode 8   | <b>Temperature :</b>       | 23~24℃ |
| <b>Test Engineer :</b> | Eric Hum | <b>Relative Humidity :</b> | 40~41% |


| Package Mode | Average Hopping Channel | Package Transfer Time (usec) | Dwell Time (sec) | Limits (sec) | Pass/Fail |
|--------------|-------------------------|------------------------------|------------------|--------------|-----------|
| DH1          | 7.10                    | 454.00                       | 0.10             | 0.4          | Pass      |
| DH3          | 4.10                    | 1726.00                      | 0.22             | 0.4          | Pass      |
| DH5          | 3.20                    | 3006.00                      | 0.30             | 0.4          | Pass      |

**Remark:**


1. Dwell Time = 79(channels) x 0.4(s) x average hopping channel x package transfer time
2. 79 channels come from the Hopping Channel number.
3. Average Hopping Channel = hops/sweep time
4. t: Package Transfer Time(us)

**DH1 Dwell Time (One Pulse) Plot on Channel 39\_3Mbps**


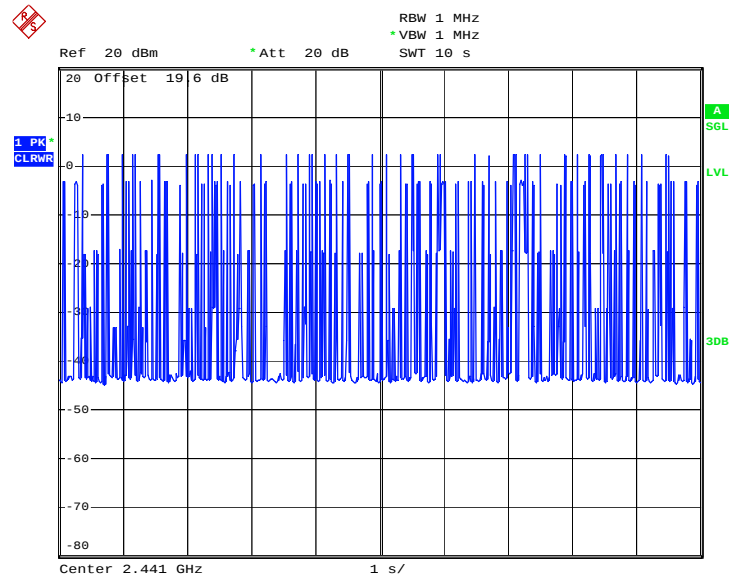
Date: 7.OCT.2008 19:32:52

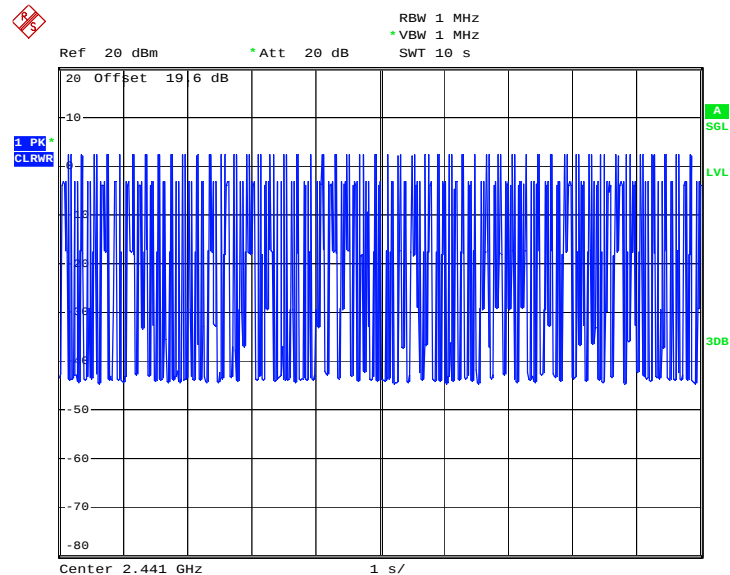**DH1 Dwell Time (Count Pulses) Plot on Channel 39\_3Mbps**


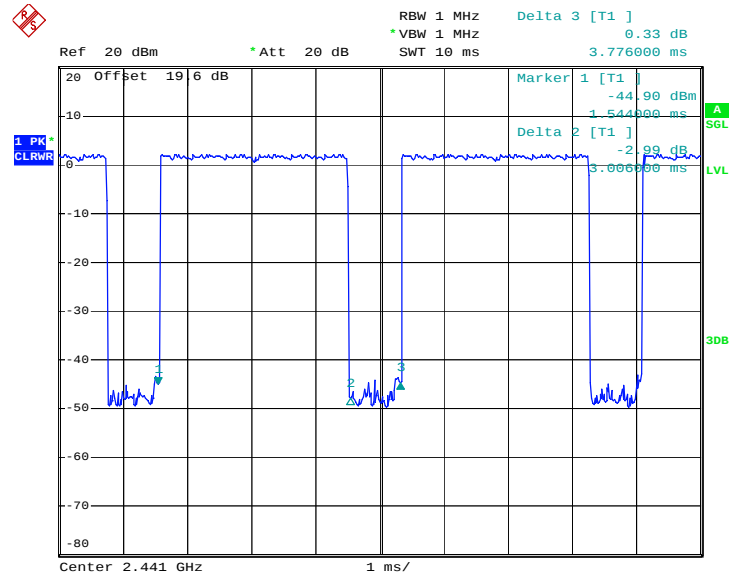
Date: 7.OCT.2008 19:36:23

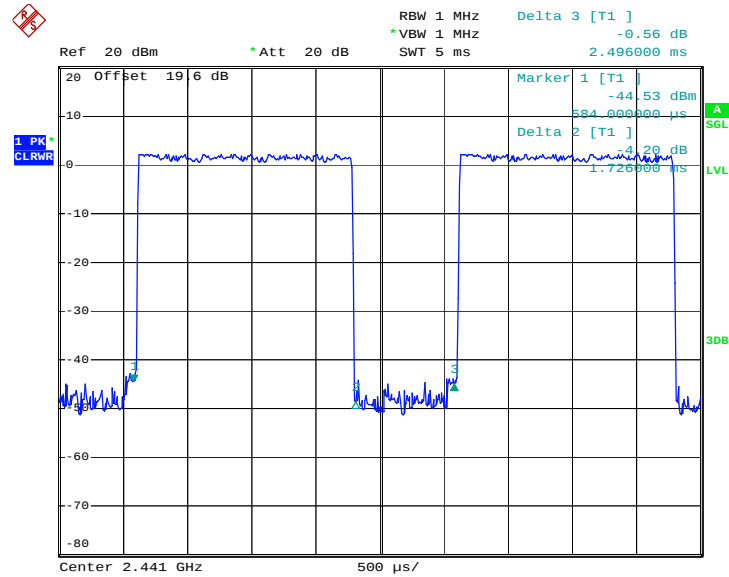**DH3 Dwell Time (One Pulse) Plot on Channel 39\_3Mbps**


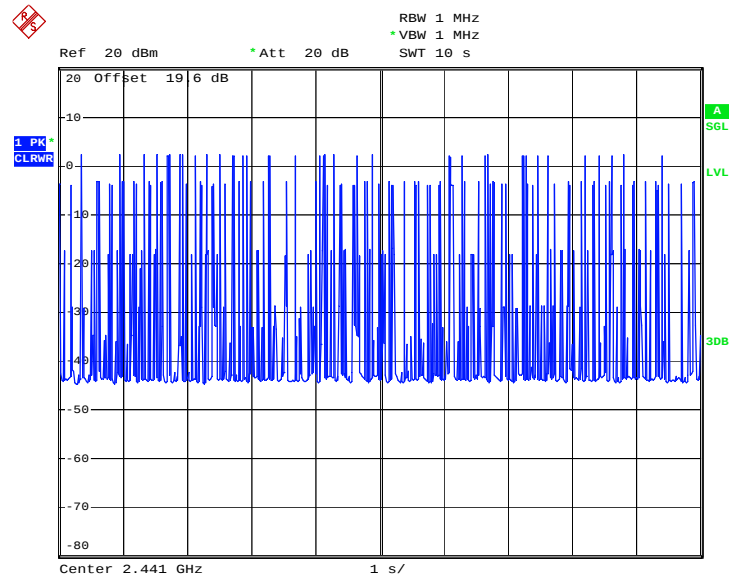
Date: 7.OCT.2008 19:33:20

**DH3 Dwell Time (Count Pulses) Plot on Channel 39\_3Mbps**


Date: 7.OCT.2008 19:36:43

**DH5 Dwell Time (One Pulse) Plot on Channel 39\_3Mbps**


Date: 7.OCT.2008 19:33:40

**DH5 Dwell Time (Count Pulses) Plot on Channel 39\_3Mbps**


Date: 7.OCT.2008 19:36:59

### 3.5 Peak Output Power Measurement

#### 3.5.1 Limit of Peak Output Power

Frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels: 1W (30 dBm).


#### 3.5.2 Measuring Instruments

See list of measuring instruments of this test report.

#### 3.5.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the peak power meter by a low loss cable.

#### 3.5.4 Test Setup

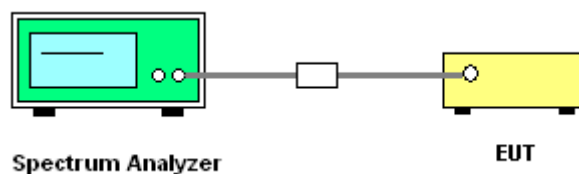


#### 3.5.5 Test Result of Peak Output Power


|                        |              |                            |        |
|------------------------|--------------|----------------------------|--------|
| <b>Test Mode :</b>     | Mode 1, 2, 3 | <b>Temperature :</b>       | 23~24℃ |
| <b>Test Engineer :</b> | Eric Hum     | <b>Relative Humidity :</b> | 40~41% |

| Channel | Frequency (MHz) | RF Power (dBm) |                   |           |
|---------|-----------------|----------------|-------------------|-----------|
|         |                 | GFSK           | Max. Limits (dBm) | Pass/Fail |
|         |                 | 1 Mbps         |                   |           |
| 00      | 2402            | 3.06           | 30                | Pass      |
| 39      | 2441            | 2.89           | 30                | Pass      |
| 78      | 2480            | 2.02           | 30                | Pass      |

**Peak Output Power Plot on Channel 00**

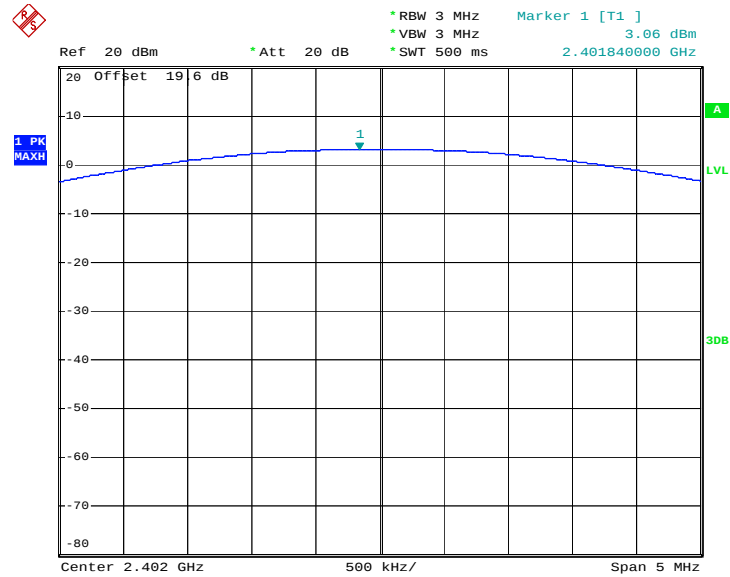
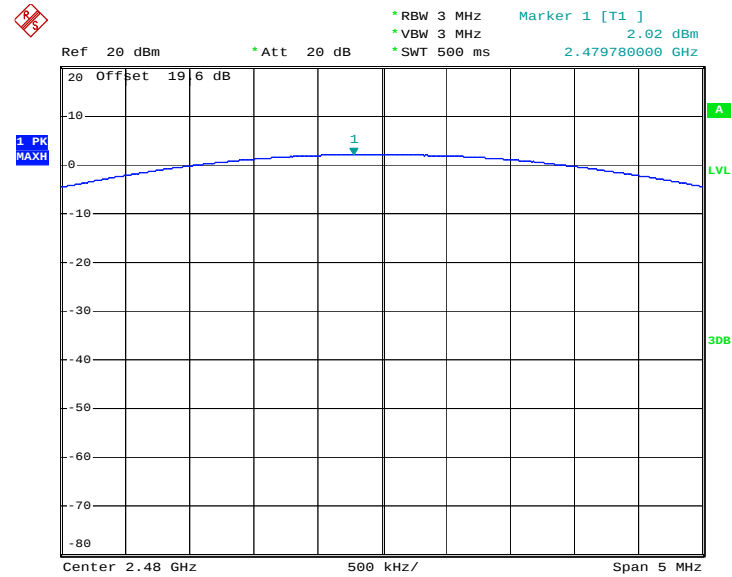
Date: 7.OCT.2008 17:40:07

**Peak Output Power Plot on Channel 39**

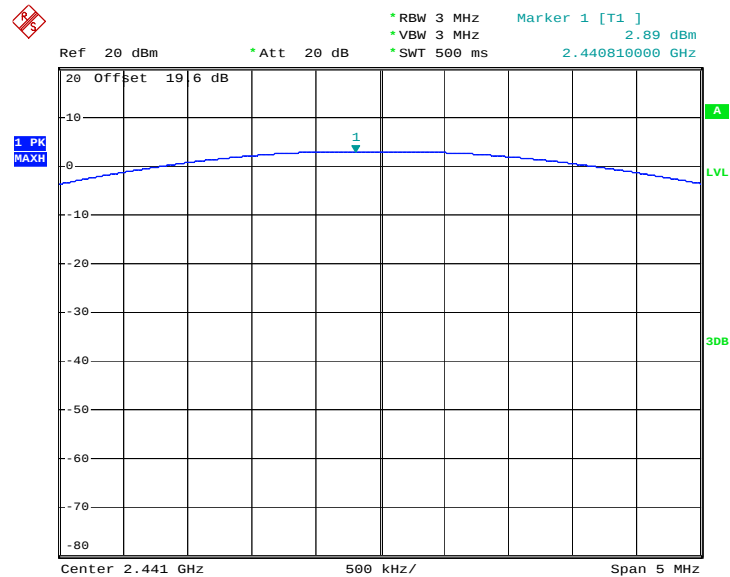
Date: 7.OCT.2008 17:41:59



Peak Output Power Plot on Channel 78




Date: 7.OCT.2008 17:37:23




|                        |              |                            |        |
|------------------------|--------------|----------------------------|--------|
| <b>Test Mode :</b>     | Mode 4, 5, 6 | <b>Temperature :</b>       | 23~24℃ |
| <b>Test Engineer :</b> | Eric Hum     | <b>Relative Humidity :</b> | 40~41% |

| Channel | Frequency<br>(MHz) | RF Power (dBm) |                      |           |
|---------|--------------------|----------------|----------------------|-----------|
|         |                    | $\pi/4$ -DQPSK | Max. Limits<br>(dBm) | Pass/Fail |
|         |                    | 2 Mbps         |                      |           |
| 00      | 2402               | 3.07           | 30                   | Pass      |
| 39      | 2441               | 2.57           | 30                   | Pass      |
| 78      | 2480               | 1.53           | 30                   | Pass      |

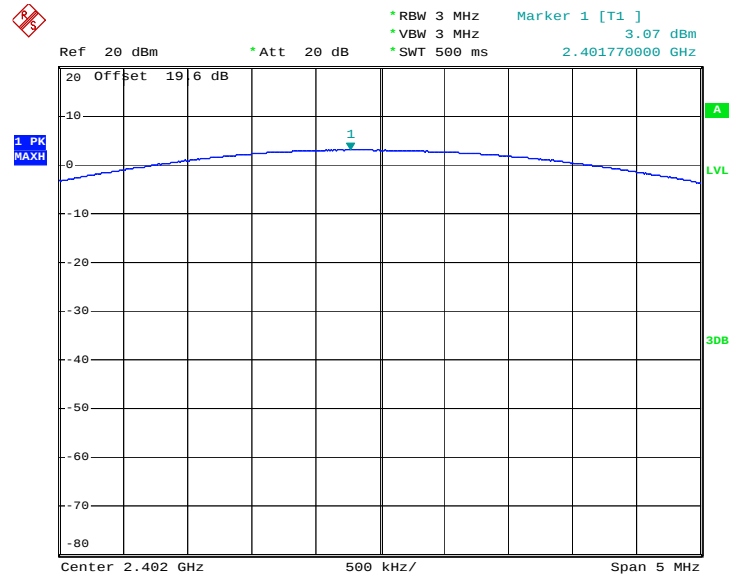**Peak Output Power Plot on Channel 00**


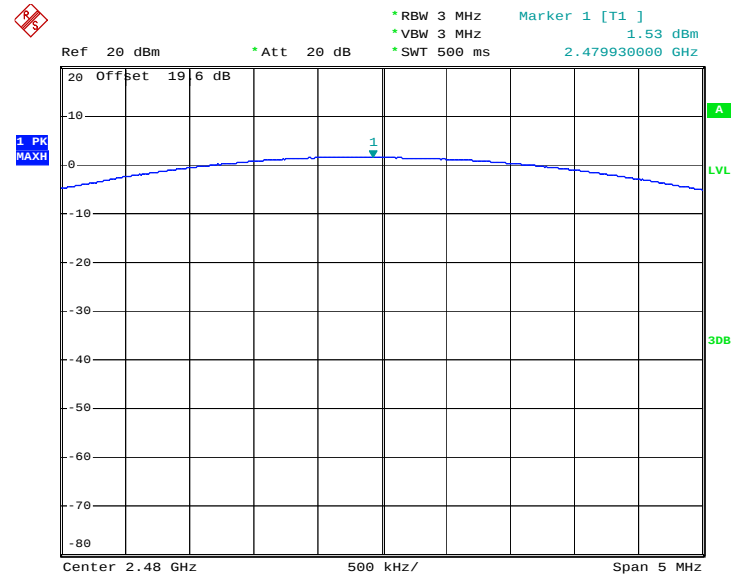
Date: 7.OCT.2008 17:40:47

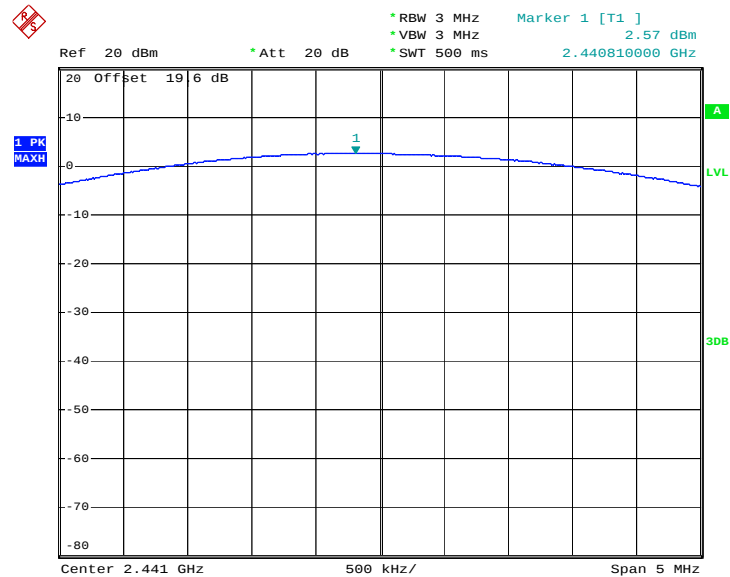**Peak Output Power Plot on Channel 39**


Date: 7.OCT.2008 17:42:14



Peak Output Power Plot on Channel 78




Date: 7.OCT.2008 17:38:15




|                        |              |                            |        |
|------------------------|--------------|----------------------------|--------|
| <b>Test Mode :</b>     | Mode 7, 8, 9 | <b>Temperature :</b>       | 23~24℃ |
| <b>Test Engineer :</b> | Eric Hum     | <b>Relative Humidity :</b> | 40~41% |

| Channel | Frequency<br>(MHz) | RF Power (dBm) |                      |           |
|---------|--------------------|----------------|----------------------|-----------|
|         |                    | 8-DPSK         | Max. Limits<br>(dBm) | Pass/Fail |
|         |                    | 3 Mbps         |                      |           |
| 00      | 2402               | 3.31           | 30                   | Pass      |
| 39      | 2441               | 2.62           | 30                   | Pass      |
| 78      | 2480               | 1.84           | 30                   | Pass      |

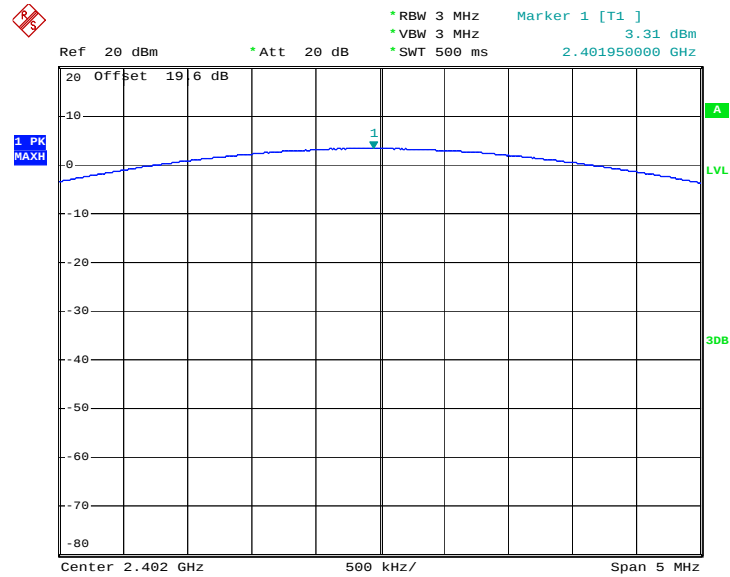**Peak Output Power Plot on Channel 00**


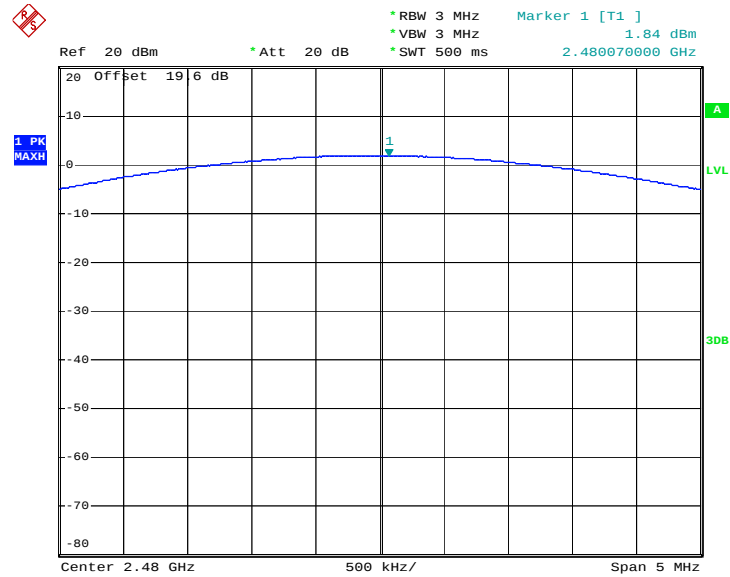
Date: 7.OCT.2008 17:41:16

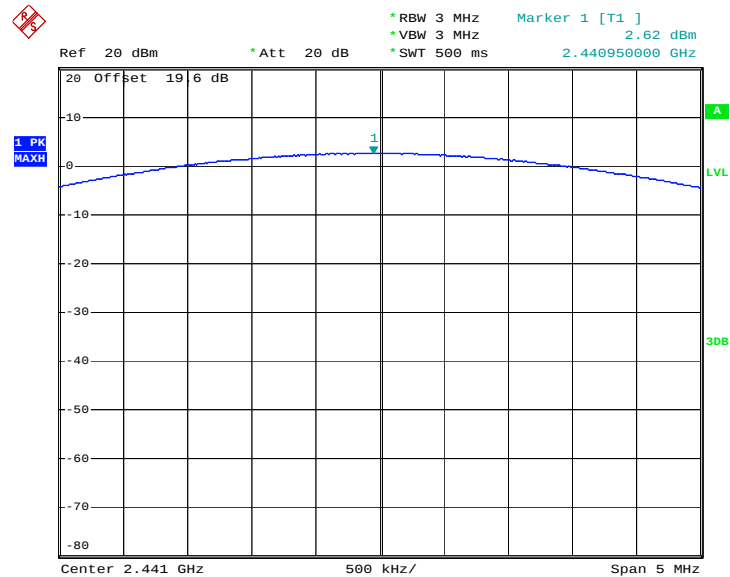**Peak Output Power Plot on Channel 39**


Date: 7.OCT.2008 17:36:20



Peak Output Power Plot on Channel 78



Date: 7.OCT.2008 17:38:40

## 3.6 Band Edges Measurement

### 3.6.1 Limit of Band Edges

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


### 3.6.2 Measuring Instruments

See list of measuring instruments of this test report.

### 3.6.3 Test Procedures

1. The testing follows the guidelines in ANSI C63.4-2003 and FCC Public Notice DA 00-705 Measurement Guidelines.
2. RF antenna conducted test: Set RBW = 100 kHz, Video bandwidth (VBW) > RBW, scan up through 10th harmonic. Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW. Note: If the device complies with the use of power option 2 the attenuation under this paragraph shall be 30 dB instead of 20 dB.
3. Radiated emission test: Applies to band edge emissions that fall in the restricted bands listed in FCC Section 15.205. The maximum permitted average field strength is listed in FCC Section 15.209. A pre-amp is necessary for this measurement. For measurements above 1 GHz, set RBW = 1MHz, VBW = 10 Hz, Sweep: Auto. If the emission is pulsed, modify the unit for continuous operation; use the settings shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation. See FCC Section 15.35(b) and (c).

### 3.6.4 Test Setup

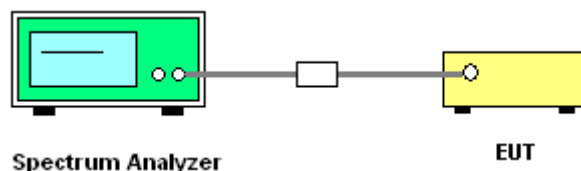

### 3.6.5 Test Result of Radiated Band Edges

|                        |               |                            |         |
|------------------------|---------------|----------------------------|---------|
| <b>Test Mode :</b>     | Mode 1        | <b>Temperature :</b>       | 20~21°C |
| <b>Test Channel :</b>  | CH00_2402 MHz | <b>Relative Humidity :</b> | 30~31%  |
| <b>Test Engineer :</b> | Mac Lin       |                            |         |

| ANTENNA POLARITY : HORIZONTAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-------------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )          | Level<br>( dBuV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBuV/m ) | Read<br>Level<br>( dBuV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 2389.42                       | 46.41               | -27.59                  | 74.00                       | 44.31                     | 32.32                       | 5.46                    | 35.67                      | 100                  | 0                       | Peak    |
| 2389.42                       | 6.07                | -47.93                  | 54.00                       | 3.96                      | 32.32                       | 5.46                    | 35.67                      | 164                  | 101                     | Average |

**Remark:**

<Delta Marker>

Delta marker at 1% RBW of span = 47.21 dB

Peak band edge at 2389.42 MHz with RBW = VBW = 1MHz = 93.62 dBuV/m – 47.21 dB = 46.41 dBuV/m

Duty factor = 20 log (Package Transfer Times x Avg Hopping Channel) = 20 log (0.003006 x 3.2) = -40.34

Average band edge = Peak band edge + Duty factor = 46.41 dBuV/m + (-40.34) = 6.07 dBuV/m

| ANTENNA POLARITY : VERTICAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-----------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )        | Level<br>( dBuV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBuV/m ) | Read<br>Level<br>( dBuV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 2376.50                     | 46.70               | -27.30                  | 74.00                       | 44.60                     | 32.30                       | 5.47                    | 35.67                      | 100                  | 0                       | Peak    |
| 2376.50                     | 6.36                | -47.64                  | 54.00                       | 4.26                      | 32.30                       | 5.47                    | 35.67                      | 100                  | 65                      | Average |

**Remark:**

<Delta Marker>

Delta marker at 1% RBW of span = 47.21 dB

Peak band edge at 2376.50 MHz with RBW = VBW = 1MHz = 93.91 dBuV/m – 47.21 dB = 46.70 dBuV/m

Duty factor = 20 log (Package Transfer Times x Avg Hopping Channel) = 20 log (0.003006 x 3.2) = -40.34

Average band edge = Peak band edge + Duty factor = 46.70 dBuV/m + (-40.34) = 6.36 dBuV/m



|                 |               |                     |         |
|-----------------|---------------|---------------------|---------|
| Test Mode :     | Mode 3        | Temperature :       | 20~21°C |
| Test Channel :  | CH78_2480 MHz | Relative Humidity : | 30~31%  |
| Test Engineer : | Mac Lin       |                     |         |

| ANTENNA POLARITY : HORIZONTAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-------------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )          | Level<br>( dBuV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBuV/m ) | Read<br>Level<br>( dBuV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 2483.50                       | 47.66               | -26.34                  | 74.00                       | 45.67                     | 32.30                       | 5.38                    | 35.69                      | 100                  | 0                       | Peak    |
| 2483.50                       | 7.32                | -46.68                  | 54.00                       | 5.33                      | 32.30                       | 5.38                    | 35.69                      | 100                  | 22                      | Average |

**Remark:**

&lt;Delta Marker&gt;

Delta marker at 1% RBW of span = 45.20 dB

Peak band edge at 2483.50 MHz with RBW = VBW = 1MHz = 92.86 dBuV/m -45.20 dB = 47.66 dBuV/m

Duty factor = 20 log (Package Transfer Times x Avg Hopping Channel) = 20 log (0.003006 x 3.2) = -40.34

Average band edge = Peak band edge + Duty factor = 47.66 dBuV/m + (-40.34) = 7.32 dBuV/m

| ANTENNA POLARITY : VERTICAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-----------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )        | Level<br>( dBuV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBuV/m ) | Read<br>Level<br>( dBuV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 2483.50                     | 49.30               | -24.70                  | 74.00                       | 47.31                     | 32.30                       | 5.38                    | 35.69                      | 100                  | 0                       | Peak    |
| 2483.50                     | 8.96                | -45.04                  | 54.00                       | 6.97                      | 32.30                       | 5.38                    | 35.69                      | 104                  | 2                       | Average |

**Remark:**

&lt;Delta Marker&gt;

Delta marker at 1% RBW of span = 45.20 dB

Peak band edge at 2482483.50 MHz with RBW = VBW = 1MHz = 94.50 dBuV/m -45.20 dB = 49.30 dBuV/m


Duty factor = 20 log (Package Transfer Times x Avg Hopping Channel) = 20 log (0.003006 x 3.2) = -40.34

Average band edge = Peak band edge + Duty factor = 49.30 dBuV/m + (-40.34) = 8.96 dBuV/m

### 3.6.6 Test Result of Conducted Band Edges


|                 |           |                     |        |
|-----------------|-----------|---------------------|--------|
| Test Mode :     | Mode 1, 3 | Temperature :       | 23~24℃ |
| Test Channel :  | 00, 78    | Relative Humidity : | 40~41% |
| Test Engineer : | Eric Hum  |                     |        |

#### Low Band Edge Plot on Channel 00

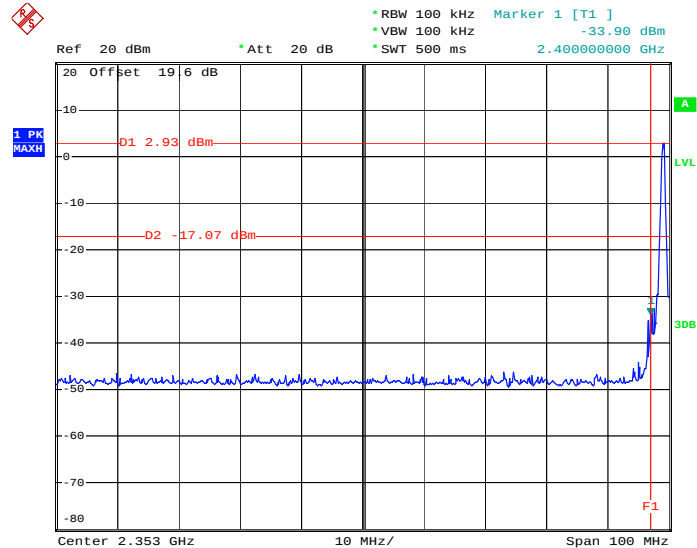

Date: 7.OCT.2008 18:55:16


#### High Band Edge Plot on Channel 78

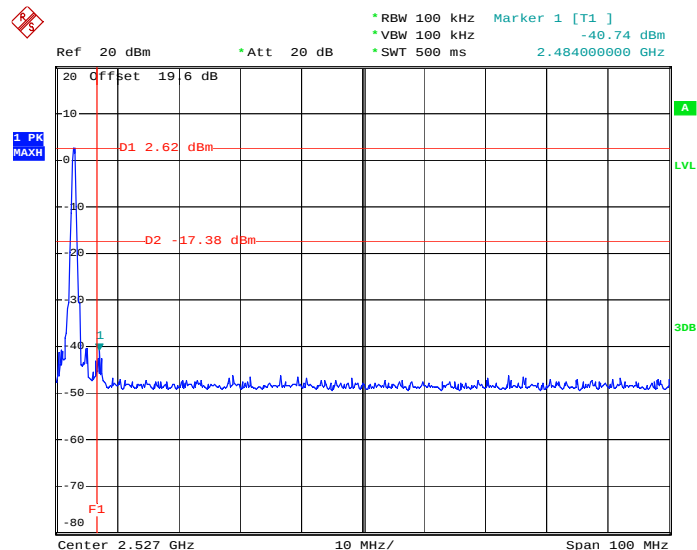


Date: 7.OCT.2008 19:19:28



|                 |           |                     |         |
|-----------------|-----------|---------------------|---------|
| Test Mode :     | Mode 4, 6 | Temperature :       | 23~24°C |
| Test Channel :  | 00, 78    | Relative Humidity : | 40~41%  |
| Test Engineer : | Eric Hum  |                     |         |

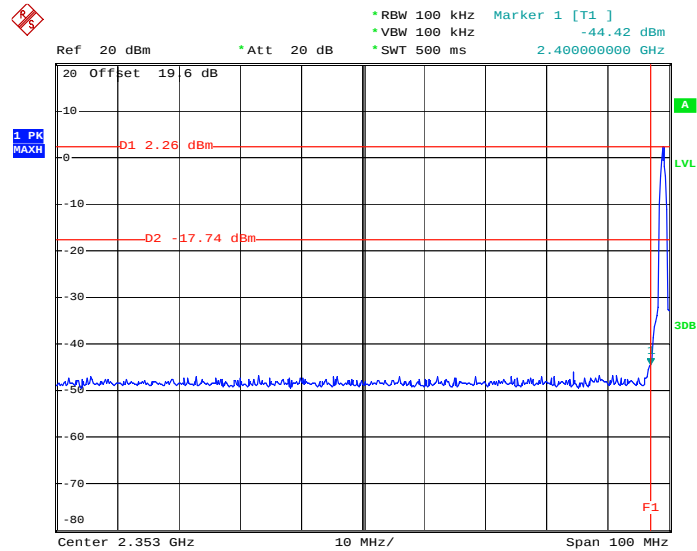**Low Band Edge Plot on Channel 00**


Date: 7.OCT.2008 18:56:00

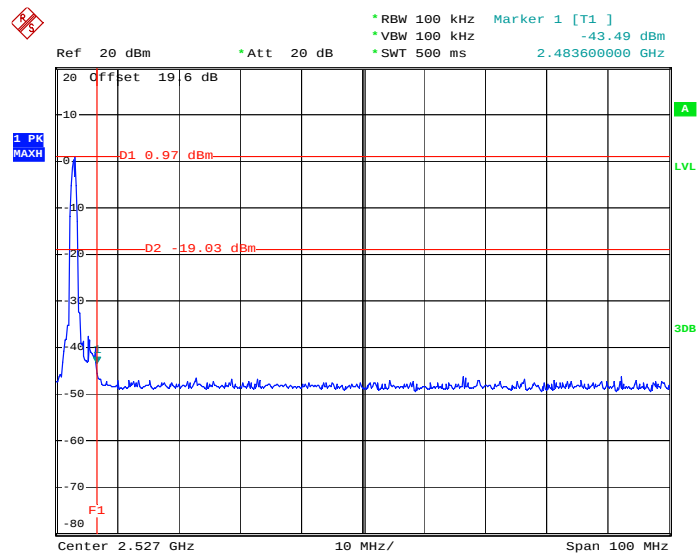**High Band Edge Plot on Channel 78**


Date: 7.OCT.2008 18:58:43



|                 |           |                     |        |
|-----------------|-----------|---------------------|--------|
| Test Mode :     | Mode 7, 9 | Temperature :       | 23~24℃ |
| Test Channel :  | 00, 78    | Relative Humidity : | 40~41% |
| Test Engineer : | Eric Hum  |                     |        |

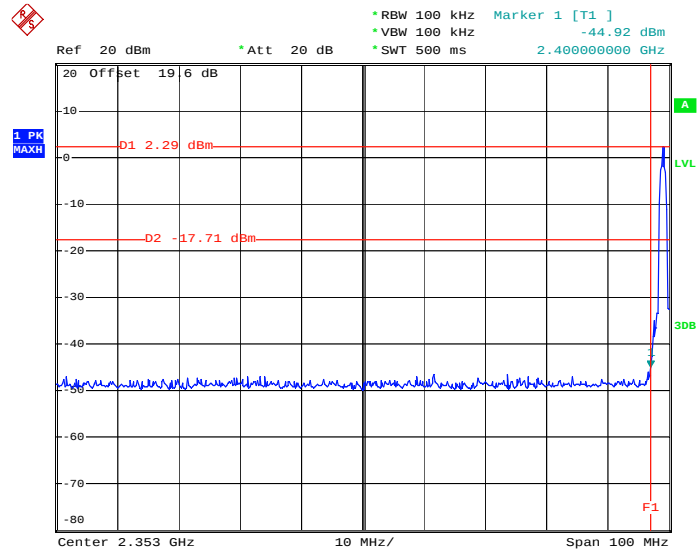**Low Band Edge Plot on Channel 00**

Date: 7.OCT.2008 18:56:33

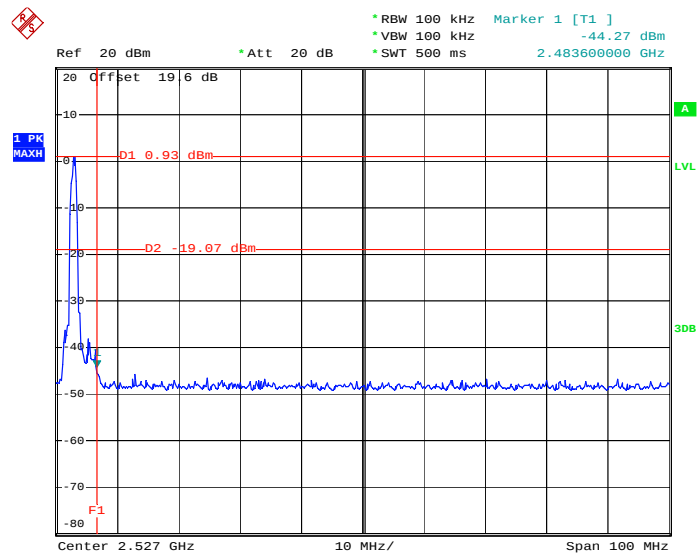**High Band Edge Plot on Channel 78**

Date: 7.OCT.2008 18:57:36

## 3.7 AC Conducted Emission Measurement

### 3.7.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

| Frequency of emission (MHz) | Conducted limit (dBuV) |           |
|-----------------------------|------------------------|-----------|
|                             | Quasi-peak             | Average   |
| 0.15-0.5                    | 66 to 56*              | 56 to 46* |
| 0.5-5                       | 56                     | 46        |
| 5-30                        | 60                     | 50        |

\*Decreases with the logarithm of the frequency.


### 3.7.2 Measuring Instruments

See list of measuring instruments of this test report.

### 3.7.3 Test Procedures


1. Please follow the guidelines in ANSI C63.4-2003.
2. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN).
4. All the support units are connecting to the other LISN.
5. The LISN provides 50 ohm coupling impedance for the measuring instrument.
6. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
7. Both sides of AC line were checked for maximum conducted interference.
8. The frequency range from 150 kHz to 30 MHz was searched.
9. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

### 3.7.4 Test Setup

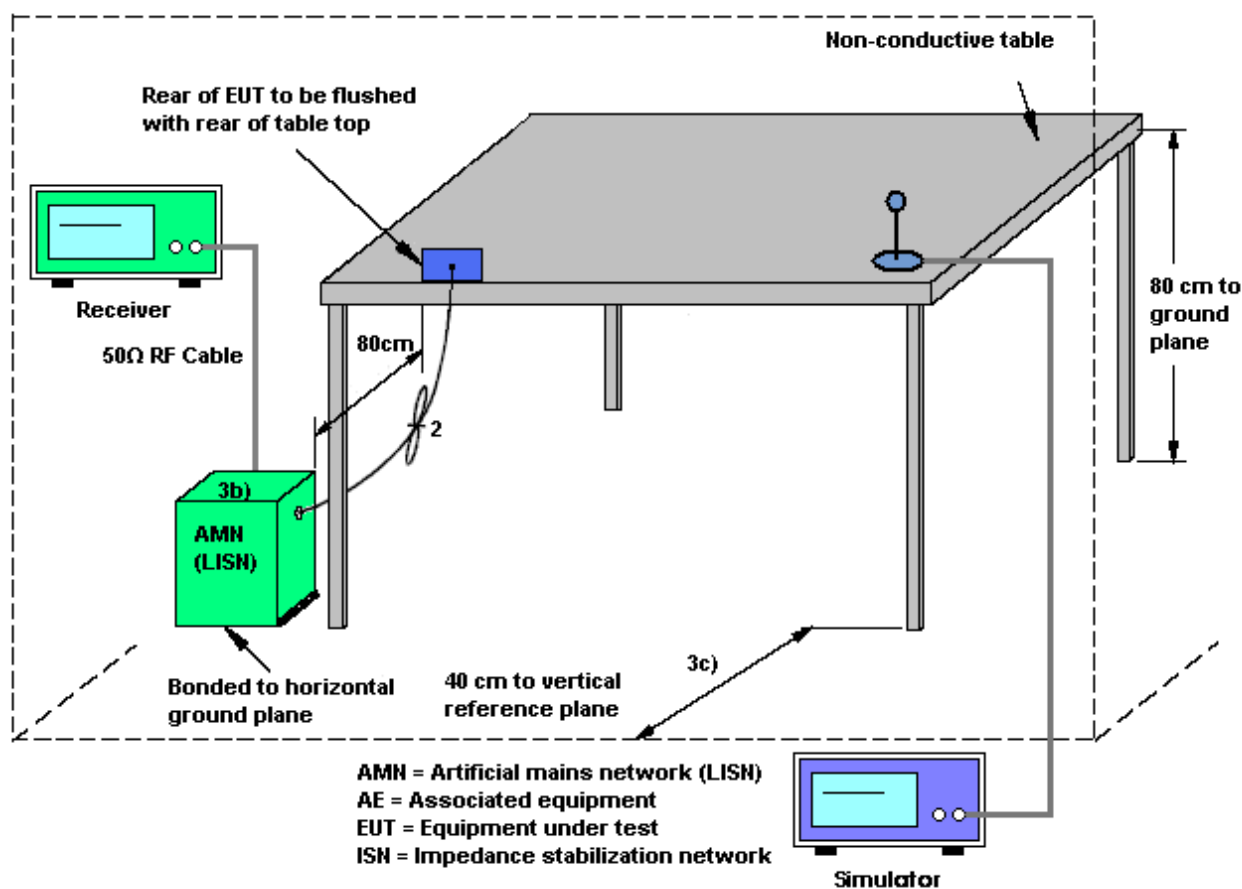

### 3.7.5 Test Result of AC Conducted Emission

|                        |                                                                                       |                            |        |
|------------------------|---------------------------------------------------------------------------------------|----------------------------|--------|
| <b>Test Mode :</b>     | Mode 1                                                                                | <b>Temperature :</b>       | 23~24℃ |
| <b>Test Engineer :</b> | Cona Huang                                                                            | <b>Relative Humidity :</b> | 40~41% |
|                        |                                                                                       | <b>Phase :</b>             | Line   |
| <b>Function Type :</b> | GSM 850 Idle + GPS Rx + BT Link + WLAN Link + Earphone + Cradle + Adapter + USB Cable |                            |        |
| <b>Remark :</b>        | All emissions not reported here are more than 10 dB below the prescribed limit.       |                            |        |

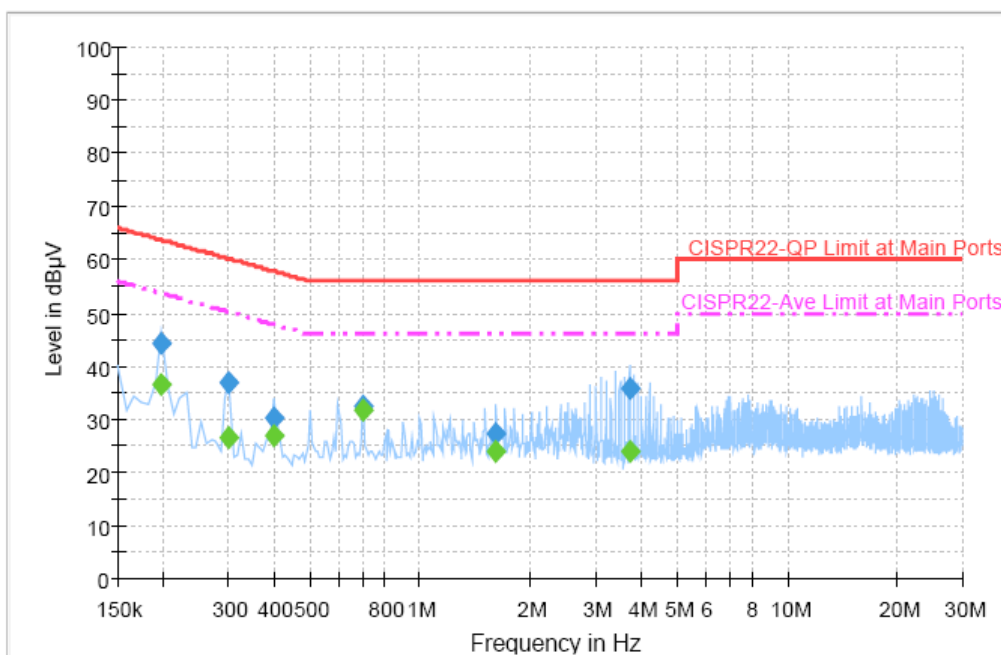


#### Final Result 1

| Frequency (MHz) | QuasiPeak (dBμV) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dBμV) |
|-----------------|------------------|--------|------|------------|-------------|--------------|
| 0.198000        | 44.3             | Off    | L1   | 19.3       | 19.4        | 63.7         |
| 0.302000        | 37.0             | Off    | L1   | 19.3       | 23.2        | 60.2         |
| 0.398000        | 30.3             | Off    | L1   | 19.4       | 27.6        | 57.9         |
| 0.702000        | 32.6             | Off    | L1   | 19.5       | 23.4        | 56.0         |
| 1.606000        | 27.2             | Off    | L1   | 19.4       | 28.8        | 56.0         |
| 3.710000        | 35.7             | Off    | L1   | 19.5       | 20.3        | 56.0         |

#### Final Result 2

| Frequency (MHz) | Average (dBμV) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dBμV) |
|-----------------|----------------|--------|------|------------|-------------|--------------|
| 0.198000        | 36.6           | Off    | L1   | 19.3       | 17.1        | 53.7         |
| 0.302000        | 26.5           | Off    | L1   | 19.3       | 23.8        | 50.2         |
| 0.398000        | 26.8           | Off    | L1   | 19.4       | 21.1        | 47.9         |
| 0.702000        | 31.7           | Off    | L1   | 19.5       | 14.3        | 46.0         |
| 1.606000        | 24.0           | Off    | L1   | 19.4       | 22.0        | 46.0         |
| 3.710000        | 23.9           | Off    | L1   | 19.5       | 22.1        | 46.0         |

|                        |                                                                                       |                            |         |
|------------------------|---------------------------------------------------------------------------------------|----------------------------|---------|
| <b>Test Mode :</b>     | Mode 1                                                                                | <b>Temperature :</b>       | 23~24°C |
| <b>Test Engineer :</b> | Cona Huang                                                                            | <b>Relative Humidity :</b> | 40~41%  |
|                        |                                                                                       | <b>Phase :</b>             | Neutral |
| <b>Function Type :</b> | GSM 850 Idle + GPS Rx + BT Link + WLAN Link + Earphone + Cradle + Adapter + USB Cable |                            |         |
| <b>Remark :</b>        | All emissions not reported here are more than 10 dB below the prescribed limit.       |                            |         |

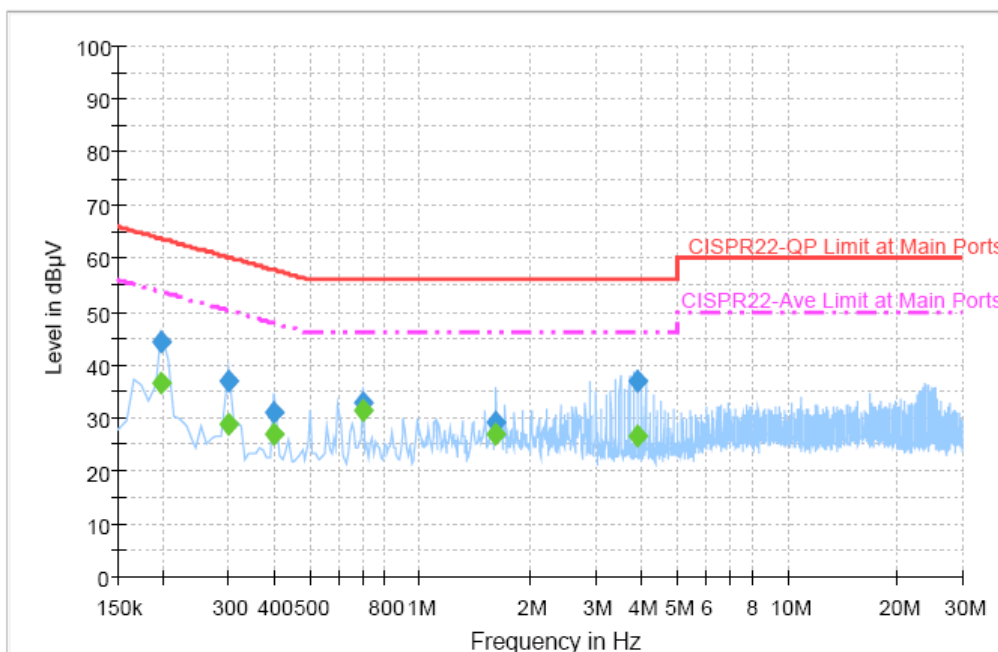


### Final Result 1

| Frequency (MHz) | QuasiPeak (dBμV) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dBμV) |
|-----------------|------------------|--------|------|------------|-------------|--------------|
| 0.198000        | 44.2             | Off    | N    | 19.3       | 19.5        | 63.7         |
| 0.302000        | 37.0             | Off    | N    | 19.3       | 23.2        | 60.2         |
| 0.398000        | 31.0             | Off    | N    | 19.4       | 26.9        | 57.9         |
| 0.702000        | 32.9             | Off    | N    | 19.5       | 23.1        | 56.0         |
| 1.606000        | 29.2             | Off    | N    | 19.4       | 26.8        | 56.0         |
| 3.910000        | 36.9             | Off    | N    | 19.5       | 19.1        | 56.0         |

### Final Result 2

| Frequency (MHz) | Average (dBμV) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dBμV) |
|-----------------|----------------|--------|------|------------|-------------|--------------|
| 0.198000        | 36.7           | Off    | N    | 19.3       | 17.0        | 53.7         |
| 0.302000        | 28.8           | Off    | N    | 19.3       | 21.4        | 50.2         |
| 0.398000        | 26.9           | Off    | N    | 19.4       | 21.0        | 47.9         |
| 0.702000        | 31.5           | Off    | N    | 19.5       | 14.5        | 46.0         |
| 1.606000        | 26.9           | Off    | N    | 19.4       | 19.1        | 46.0         |
| 3.910000        | 26.6           | Off    | N    | 19.5       | 19.4        | 46.0         |

|                        |                                                                                           |                            |         |
|------------------------|-------------------------------------------------------------------------------------------|----------------------------|---------|
| <b>Test Mode :</b>     | Mode 2                                                                                    | <b>Temperature :</b>       | 23~24°C |
| <b>Test Engineer :</b> | Cona Huang                                                                                | <b>Relative Humidity :</b> | 40~41%  |
|                        |                                                                                           | <b>Phase :</b>             | Line    |
| <b>Function Type :</b> | GSM 850 Idle + GPS Rx + BT Link + WLAN Link + Earphone + USB Charging Cable with AC Power |                            |         |
| <b>Remark :</b>        | All emissions not reported here are more than 10 dB below the prescribed limit.           |                            |         |

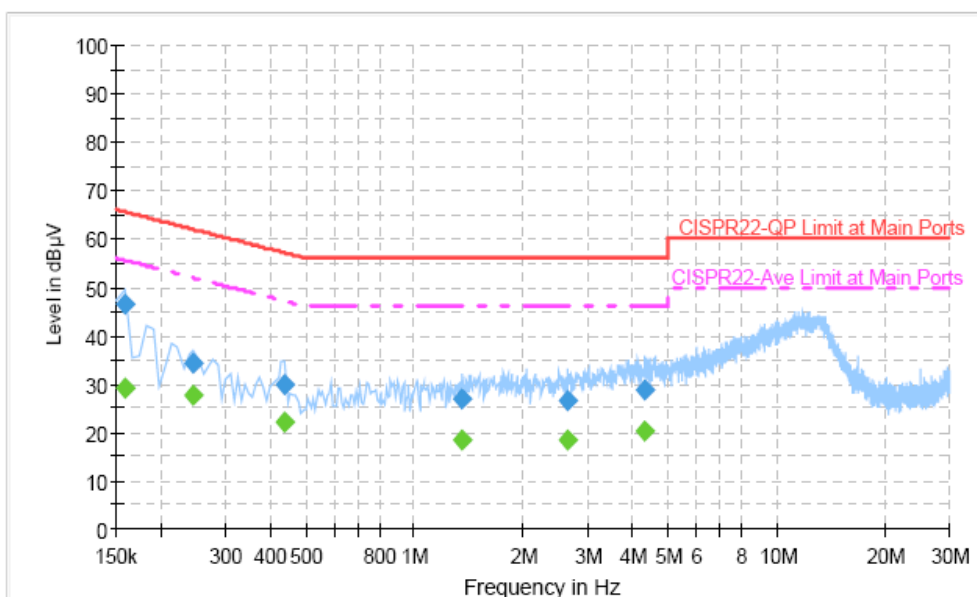


### Final Result 1

| Frequency (MHz) | QuasiPeak (dBμV) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dBμV) |
|-----------------|------------------|--------|------|------------|-------------|--------------|
| 0.158000        | 46.6             | Off    | L1   | 19.3       | 19.0        | 65.6         |
| 0.246000        | 34.4             | Off    | L1   | 19.4       | 27.5        | 61.9         |
| 0.438000        | 30.0             | Off    | L1   | 19.4       | 27.1        | 57.1         |
| 1.358000        | 27.0             | Off    | L1   | 19.4       | 29.0        | 56.0         |
| 2.646000        | 26.5             | Off    | L1   | 19.4       | 29.5        | 56.0         |
| 4.326000        | 28.9             | Off    | L1   | 19.5       | 27.1        | 56.0         |

### Final Result 2

| Frequency (MHz) | Average (dBμV) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dBμV) |
|-----------------|----------------|--------|------|------------|-------------|--------------|
| 0.158000        | 29.3           | Off    | L1   | 19.3       | 26.3        | 55.6         |
| 0.246000        | 27.5           | Off    | L1   | 19.4       | 24.4        | 51.9         |
| 0.438000        | 22.0           | Off    | L1   | 19.4       | 25.1        | 47.1         |
| 1.358000        | 18.3           | Off    | L1   | 19.4       | 27.7        | 46.0         |
| 2.646000        | 18.5           | Off    | L1   | 19.4       | 27.5        | 46.0         |
| 4.326000        | 20.4           | Off    | L1   | 19.5       | 25.6        | 46.0         |

|                        |                                                                                           |                            |         |
|------------------------|-------------------------------------------------------------------------------------------|----------------------------|---------|
| <b>Test Mode :</b>     | Mode 2                                                                                    | <b>Temperature :</b>       | 23~24°C |
| <b>Test Engineer :</b> | Cona Huang                                                                                | <b>Relative Humidity :</b> | 40~41%  |
|                        |                                                                                           | <b>Phase :</b>             | Neutral |
| <b>Function Type :</b> | GSM 850 Idle + GPS Rx + BT Link + WLAN Link + Earphone + USB Charging Cable with AC Power |                            |         |
| <b>Remark :</b>        | All emissions not reported here are more than 10 dB below the prescribed limit.           |                            |         |

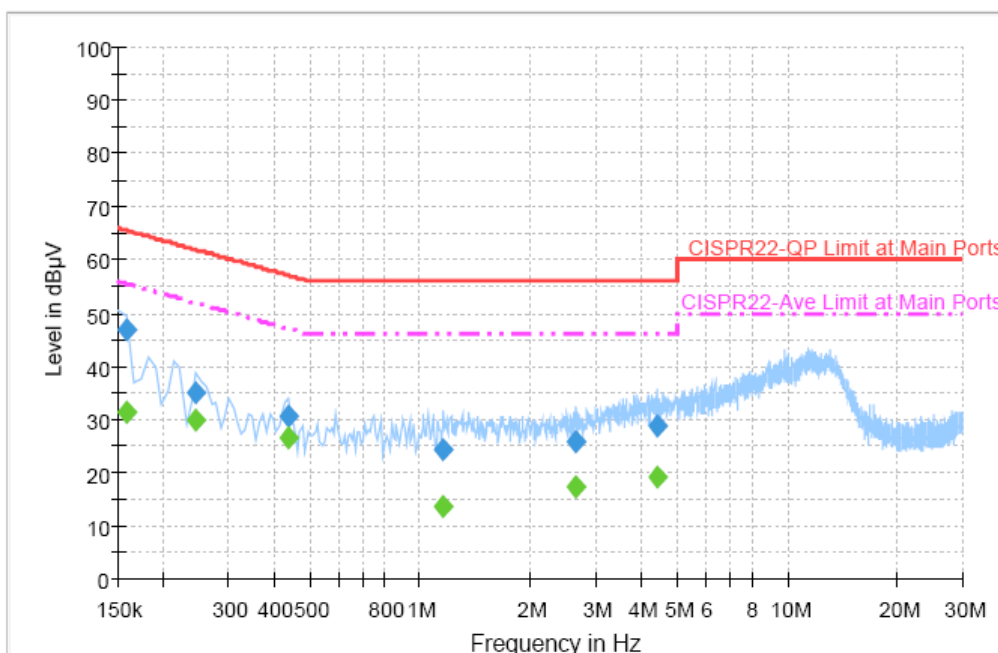


### Final Result 1

| Frequency (MHz) | QuasiPeak (dBμV) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dBμV) |
|-----------------|------------------|--------|------|------------|-------------|--------------|
| 0.158000        | 46.9             | Off    | N    | 19.4       | 18.7        | 65.6         |
| 0.246000        | 35.1             | Off    | N    | 19.4       | 26.8        | 61.9         |
| 0.438000        | 30.7             | Off    | N    | 19.4       | 26.4        | 57.1         |
| 1.158000        | 24.2             | Off    | N    | 19.4       | 31.8        | 56.0         |
| 2.662000        | 25.9             | Off    | N    | 19.4       | 30.1        | 56.0         |
| 4.438000        | 28.6             | Off    | N    | 19.5       | 27.4        | 56.0         |

### Final Result 2

| Frequency (MHz) | Average (dBμV) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dBμV) |
|-----------------|----------------|--------|------|------------|-------------|--------------|
| 0.158000        | 31.5           | Off    | N    | 19.4       | 24.1        | 55.6         |
| 0.246000        | 29.9           | Off    | N    | 19.4       | 22.0        | 51.9         |
| 0.438000        | 26.7           | Off    | N    | 19.4       | 20.4        | 47.1         |
| 1.158000        | 13.7           | Off    | N    | 19.4       | 32.3        | 46.0         |
| 2.662000        | 17.3           | Off    | N    | 19.4       | 28.7        | 46.0         |
| 4.438000        | 19.1           | Off    | N    | 19.5       | 26.9        | 46.0         |

|                        |                                                                                     |                            |         |
|------------------------|-------------------------------------------------------------------------------------|----------------------------|---------|
| <b>Test Mode :</b>     | Mode 3                                                                              | <b>Temperature :</b>       | 23~24°C |
| <b>Test Engineer :</b> | Cona Huang                                                                          | <b>Relative Humidity :</b> | 40~41%  |
|                        |                                                                                     | <b>Phase :</b>             | Line    |
| <b>Function Type :</b> | WCDMA Idle + GPS Rx + BT Link + WLAN Link + Earphone + Cradle + Adapter + USB Cable |                            |         |
| <b>Remark :</b>        | All emissions not reported here are more than 10 dB below the prescribed limit.     |                            |         |

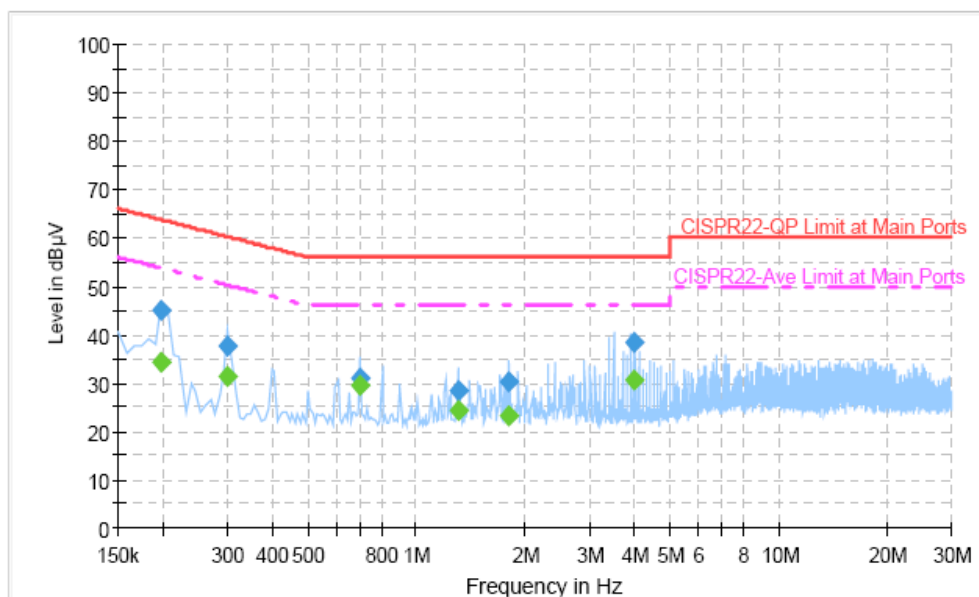


### Final Result 1

| Frequency (MHz) | QuasiPeak (dBµV) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dBµV) |
|-----------------|------------------|--------|------|------------|-------------|--------------|
| 0.198000        | 45.2             | Off    | L1   | 19.3       | 18.5        | 63.7         |
| 0.302000        | 37.8             | Off    | L1   | 19.3       | 22.4        | 60.2         |
| 0.702000        | 31.0             | Off    | L1   | 19.5       | 25.0        | 56.0         |
| 1.302000        | 28.4             | Off    | L1   | 19.5       | 27.6        | 56.0         |
| 1.806000        | 30.4             | Off    | L1   | 19.5       | 25.6        | 56.0         |
| 4.014000        | 38.3             | Off    | L1   | 19.5       | 17.7        | 56.0         |

### Final Result 2

| Frequency (MHz) | Average (dBµV) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dBµV) |
|-----------------|----------------|--------|------|------------|-------------|--------------|
| 0.198000        | 34.4           | Off    | L1   | 19.3       | 19.3        | 53.7         |
| 0.302000        | 31.2           | Off    | L1   | 19.3       | 19.0        | 50.2         |
| 0.702000        | 29.6           | Off    | L1   | 19.5       | 16.4        | 46.0         |
| 1.302000        | 24.2           | Off    | L1   | 19.5       | 21.8        | 46.0         |
| 1.806000        | 23.2           | Off    | L1   | 19.5       | 22.8        | 46.0         |
| 4.014000        | 30.5           | Off    | L1   | 19.5       | 15.5        | 46.0         |

|                        |                                                                                     |                            |         |
|------------------------|-------------------------------------------------------------------------------------|----------------------------|---------|
| <b>Test Mode :</b>     | Mode 3                                                                              | <b>Temperature :</b>       | 23~24℃  |
| <b>Test Engineer :</b> | Cona Huang                                                                          | <b>Relative Humidity :</b> | 40~41%  |
|                        |                                                                                     | <b>Phase :</b>             | Neutral |
| <b>Function Type :</b> | WCDMA Idle + GPS Rx + BT Link + WLAN Link + Earphone + Cradle + Adapter + USB Cable |                            |         |
| <b>Remark :</b>        | All emissions not reported here are more than 10 dB below the prescribed limit.     |                            |         |

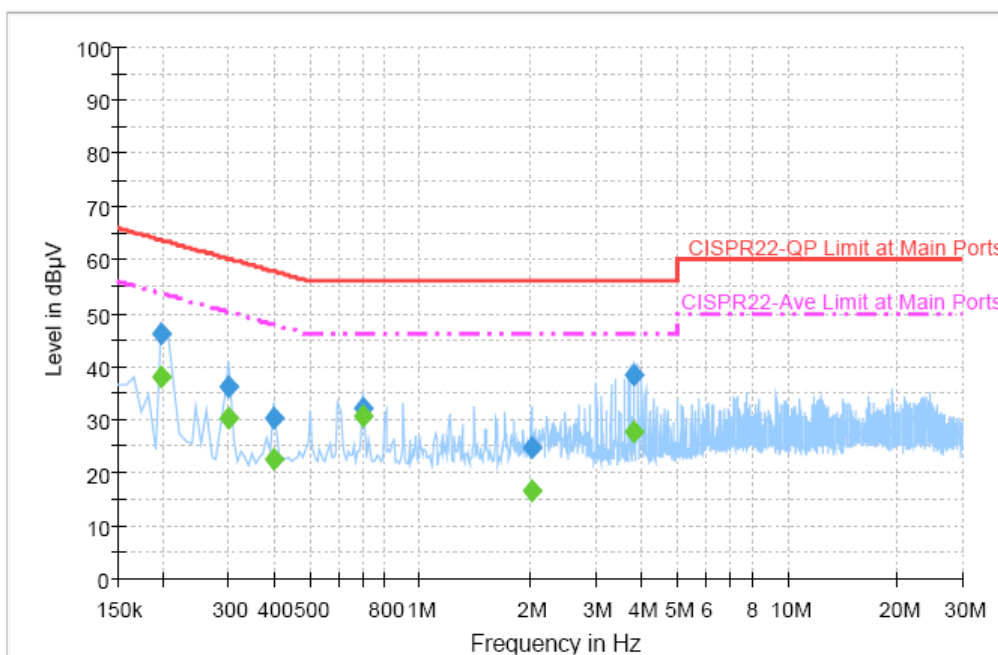

### Final Result 1

| Frequency (MHz) | QuasiPeak (dBμV) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dBμV) |
|-----------------|------------------|--------|------|------------|-------------|--------------|
| 0.198000        | 46.1             | Off    | N    | 19.3       | 17.6        | 63.7         |
| 0.302000        | 36.1             | Off    | N    | 19.3       | 24.1        | 60.2         |
| 0.398000        | 30.4             | Off    | N    | 19.4       | 27.5        | 57.9         |
| 0.702000        | 32.0             | Off    | N    | 19.5       | 24.0        | 56.0         |
| 2.006000        | 24.6             | Off    | N    | 19.5       | 31.4        | 56.0         |
| 3.814000        | 38.4             | Off    | N    | 19.5       | 17.6        | 56.0         |

### Final Result 2

| Frequency (MHz) | Average (dBμV) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dBμV) |
|-----------------|----------------|--------|------|------------|-------------|--------------|
| 0.198000        | 38.0           | Off    | N    | 19.3       | 15.7        | 53.7         |
| 0.302000        | 30.3           | Off    | N    | 19.3       | 19.9        | 50.2         |
| 0.398000        | 22.5           | Off    | N    | 19.4       | 25.4        | 47.9         |
| 0.702000        | 30.6           | Off    | N    | 19.5       | 15.4        | 46.0         |
| 2.006000        | 16.5           | Off    | N    | 19.5       | 29.5        | 46.0         |
| 3.814000        | 27.6           | Off    | N    | 19.5       | 18.4        | 46.0         |

## 3.8 Radiated Emission Measurement

### 3.8.1 Limit of Radiated Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

| Frequency<br>(MHz) | Field Strength<br>(microvolts/meter) | Measurement Distance<br>(meters) |
|--------------------|--------------------------------------|----------------------------------|
| 0.009 – 0.490      | 2400/F(kHz)                          | 300                              |
| 0.490 – 1.705      | 24000/F(kHz)                         | 30                               |
| 1.705 – 30.0       | 30                                   | 30                               |
| 30 – 88            | 100                                  | 3                                |
| 88 – 216           | 150                                  | 3                                |
| 216 - 960          | 200                                  | 3                                |
| Above 960          | 500                                  | 3                                |


### 3.8.2 Measuring Instruments

See list of measuring instruments of this test report.

### 3.8.3 Test Procedures


1. The testing follows the guidelines in FCC Public Notice DA 00-705 Measurement Guidelines.
2. Use the following spectrum analyzer settings:  
Span = wide enough to fully capture the emission being measured; RBW = 1 MHz for  $f \geq 1$  GHz, 100 kHz for  $f < 1$  GHz; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold.
3. Follow the guidelines in ANSI C63.4-2003 with respect to maximizing the emission by rotating the EUT, measuring the emission for three EUT orthogonal planes, and adjusting the measurement antenna height and polarization. A pre-amp and a high pass filter are used for this test in order to get the good signal level.

### 3.8.4 Test Setup

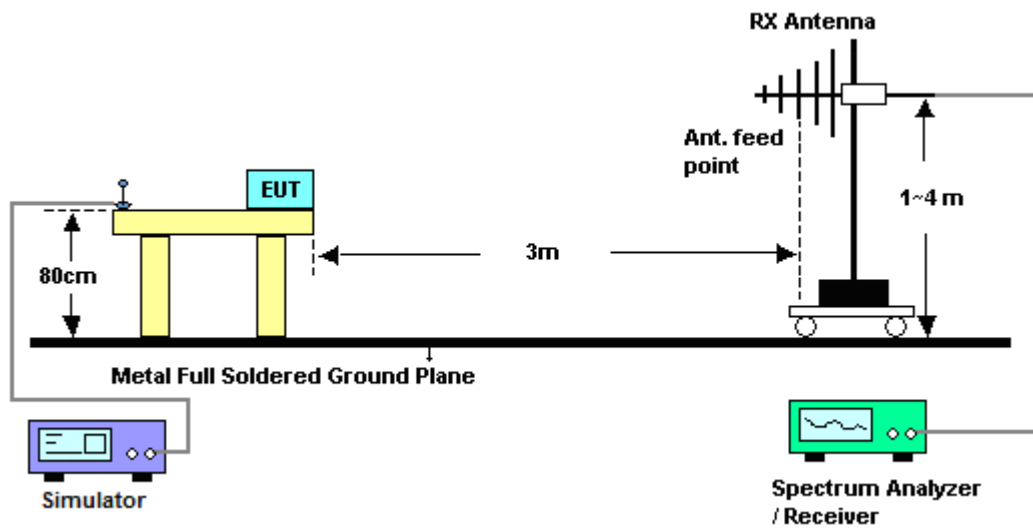

**3.8.5 Test Result of Radiated Emission < 1GHz**


|                        |               |                            |            |
|------------------------|---------------|----------------------------|------------|
| <b>Test Mode :</b>     | Mode 1        | <b>Temperature :</b>       | 20~21°C    |
| <b>Test Channel :</b>  | CH00_2402 MHz | <b>Relative Humidity :</b> | 30~31%     |
| <b>Test Engineer :</b> | Mac Lin       | <b>Polarization :</b>      | Horizontal |
| <b>Remark :</b>        |               |                            |            |

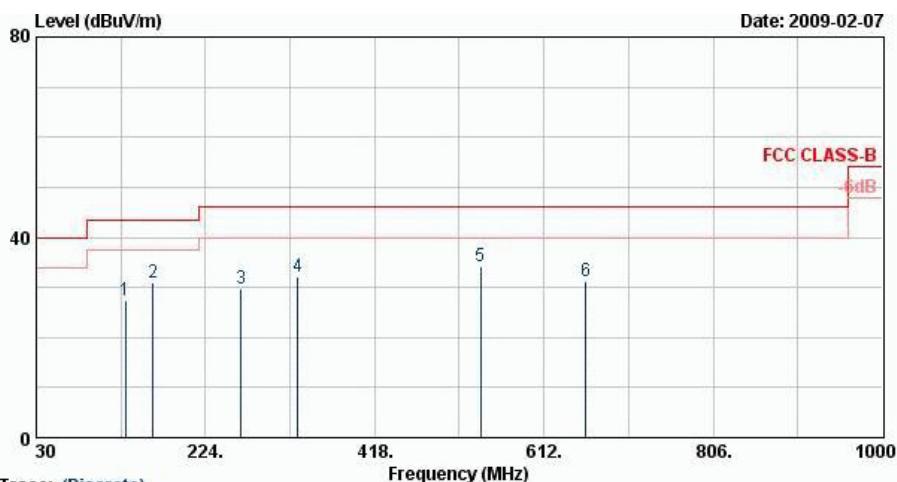

Site : 03CH07-HY  
Condition : 3m BILOG\_081118 HORIZONTAL  
Project : FR 803027-02  
Mode : Mode 1

|     | Freq   | Level  | Over   | Limit  | ReadAntenna | Cable | Preamp | Ant   | Table |         |
|-----|--------|--------|--------|--------|-------------|-------|--------|-------|-------|---------|
|     | MHz    | dBuV/m | Limit  | Line   | Level       | Loss  | Factor | Pos   | Pos   | Remark  |
|     |        |        | dB     | dBuV/m | dBuV        | dB/m  | dB     | cm    | deg   |         |
| 1   | 132.33 | 27.36  | -16.14 | 43.50  | 45.45       | 11.88 | 1.37   | 31.34 | ---   | Peak    |
| 2   | 163.65 | 30.94  | -12.56 | 43.50  | 50.88       | 9.85  | 1.53   | 31.32 | ---   | Peak    |
| 3   | 265.17 | 29.63  | -16.37 | 46.00  | 46.01       | 13.10 | 1.97   | 31.46 | ---   | Peak    |
| 4   | 329.40 | 32.06  | -13.94 | 46.00  | 47.33       | 13.84 | 2.26   | 31.37 | ---   | Peak    |
| 5 @ | 539.40 | 34.09  | -11.91 | 46.00  | 44.19       | 17.89 | 3.06   | 31.05 | 100   | 16 Peak |
| 6   | 659.80 | 31.36  | -14.64 | 46.00  | 39.83       | 18.99 | 3.44   | 30.90 | ---   | Peak    |

|                        |               |                            |          |
|------------------------|---------------|----------------------------|----------|
| <b>Test Mode :</b>     | Mode 1        | <b>Temperature :</b>       | 20~21°C  |
| <b>Test Channel :</b>  | CH00_2402 MHz | <b>Relative Humidity :</b> | 30~31%   |
| <b>Test Engineer :</b> | Mac Lin       | <b>Polarization :</b>      | Vertical |
| <b>Remark :</b>        |               |                            |          |

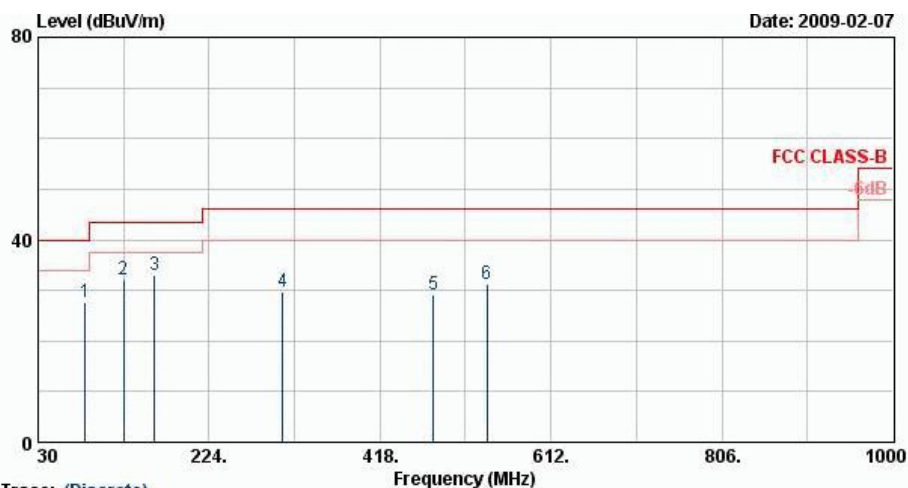


Trace: (Discrete)

Site : 03CH07-HY  
Condition : 3m BILOG\_081118 VERTICAL  
Project : FR 8O3027-02  
Mode : Mode 1

|     | Freq   | Level  | Over   | Limit  | Read  | Antenna | Cable | Preamp | Ant | Table | Remark |
|-----|--------|--------|--------|--------|-------|---------|-------|--------|-----|-------|--------|
|     | MHz    | dBuV/m | Limit  | Line   | Level | Factor  | Loss  | Factor | Pos | Pos   |        |
|     |        |        | dB     | dBuV/m | dBuV  | dB/m    | dB    | dB     | cm  | deg   |        |
| 1   | 83.46  | 27.71  | -12.29 | 40.00  | 50.36 | 7.69    | 1.03  | 31.37  | --- | ---   | Peak   |
| 2 @ | 126.93 | 32.05  | -11.45 | 43.50  | 49.73 | 12.33   | 1.36  | 31.37  | --- | ---   | Peak   |
| 3 @ | 162.57 | 33.00  | -10.50 | 43.50  | 52.90 | 9.90    | 1.52  | 31.32  | 100 | 311   | QP     |
| 4   | 307.70 | 29.62  | -16.38 | 46.00  | 45.59 | 13.26   | 2.16  | 31.39  | --- | ---   | Peak   |
| 5   | 478.50 | 29.02  | -16.98 | 46.00  | 40.36 | 16.96   | 2.86  | 31.16  | --- | ---   | Peak   |
| 6   | 539.40 | 31.34  | -14.66 | 46.00  | 41.44 | 17.89   | 3.06  | 31.05  | --- | ---   | Peak   |

|                        |               |                            |            |
|------------------------|---------------|----------------------------|------------|
| <b>Test Mode :</b>     | Mode 2        | <b>Temperature :</b>       | 20~21°C    |
| <b>Test Channel :</b>  | CH39_2441 MHz | <b>Relative Humidity :</b> | 30~31%     |
| <b>Test Engineer :</b> | Mac Lin       | <b>Polarization :</b>      | Horizontal |
| <b>Remark :</b>        |               |                            |            |

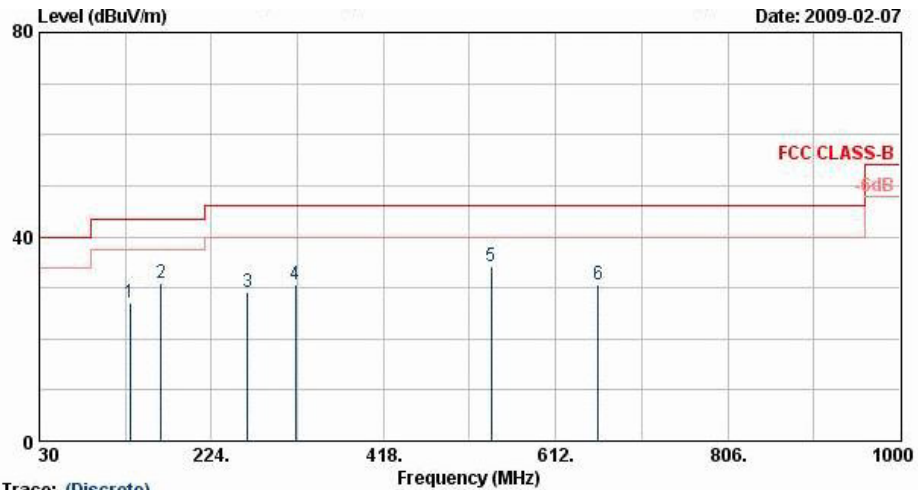


Trace: (Discrete)

Site : 03CH07-HY  
Condition : FCC CLASS-B 3m BILOG\_081118 HORIZONTAL  
Project : FR 8O3027-02  
Mode : Mode 2

|     | Freq   | Level  | Over   | Limit  | ReadAntenna | Cable | Preamp | Ant   | Table |          |
|-----|--------|--------|--------|--------|-------------|-------|--------|-------|-------|----------|
|     | MHz    | dBuV/m | Limit  | Line   | Level       | Loss  | Factor | Pos   | Pos   | Remark   |
|     |        |        | dB     | dBuV/m | dBuV        | dB/m  | dB     | dB    | cm    | deg      |
| 1   | 132.33 | 26.93  | -16.57 | 43.50  | 45.02       | 11.88 | 1.37   | 31.34 | ---   | Peak     |
| 2   | 166.89 | 30.99  | -12.51 | 43.50  | 51.05       | 9.72  | 1.54   | 31.32 | ---   | Peak     |
| 3   | 265.17 | 29.15  | -16.85 | 46.00  | 45.54       | 13.10 | 1.97   | 31.46 | ---   | Peak     |
| 4   | 318.90 | 30.62  | -15.38 | 46.00  | 46.20       | 13.56 | 2.21   | 31.36 | ---   | Peak     |
| 5 @ | 539.40 | 34.24  | -11.76 | 46.00  | 44.34       | 17.89 | 3.06   | 31.05 | 100   | 351 Peak |
| 6   | 659.80 | 30.77  | -15.23 | 46.00  | 39.24       | 18.99 | 3.44   | 30.90 | ---   | Peak     |




|                 |               |                     |          |
|-----------------|---------------|---------------------|----------|
| Test Mode :     | Mode 2        | Temperature :       | 20~21°C  |
| Test Channel :  | CH39_2441 MHz | Relative Humidity : | 30~31%   |
| Test Engineer : | Mac Lin       | Polarization :      | Vertical |
| Remark :        |               |                     |          |

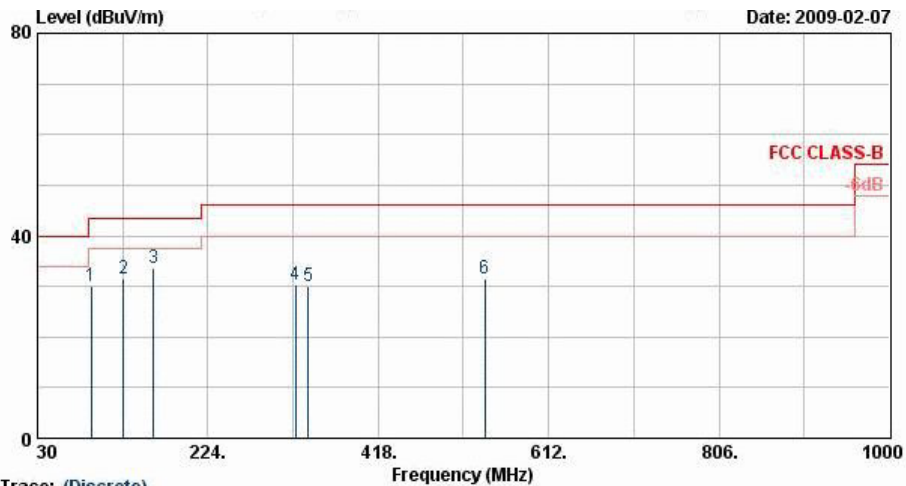

Site : 03CH07-HY  
Condition : FCC CLASS-B 3m BILOG\_081118 VERTICAL  
Project : FR 8O3027-02  
Mode : Mode 2

|     | Freq   | Level  | Over   | Limit  | Read  | Antenna | Cable | Preamp | Ant | Table |        |
|-----|--------|--------|--------|--------|-------|---------|-------|--------|-----|-------|--------|
|     | MHz    | dBuV/m | Limit  | Line   | Level | Factor  | Loss  | Factor | Pos | Pos   | Remark |
|     |        |        | dB     | dBuV/m | dBuV  | dB/m    | dB    | dB     | cm  | deg   |        |
| 1   | 91.29  | 30.01  | -13.49 | 43.50  | 51.01 | 9.31    | 1.12  | 31.43  | --- | ---   | Peak   |
| 2   | 128.01 | 31.67  | -11.83 | 43.50  | 49.44 | 12.24   | 1.36  | 31.36  | --- | ---   | Peak   |
| 3 @ | 162.30 | 33.65  | -9.85  | 43.50  | 53.50 | 9.94    | 1.52  | 31.31  | 100 | 323   | QP     |
| 4   | 323.80 | 30.29  | -15.71 | 46.00  | 45.71 | 13.69   | 2.24  | 31.35  | --- | ---   | Peak   |
| 5   | 338.50 | 30.02  | -15.98 | 46.00  | 45.06 | 14.07   | 2.29  | 31.41  | --- | ---   | Peak   |
| 6   | 539.40 | 31.61  | -14.39 | 46.00  | 41.71 | 17.89   | 3.06  | 31.05  | --- | ---   | Peak   |

|                        |               |                            |            |
|------------------------|---------------|----------------------------|------------|
| <b>Test Mode :</b>     | Mode 3        | <b>Temperature :</b>       | 20~21°C    |
| <b>Test Channel :</b>  | CH78_2480 MHz | <b>Relative Humidity :</b> | 30~31%     |
| <b>Test Engineer :</b> | Mac Lin       | <b>Polarization :</b>      | Horizontal |
| <b>Remark :</b>        |               |                            |            |

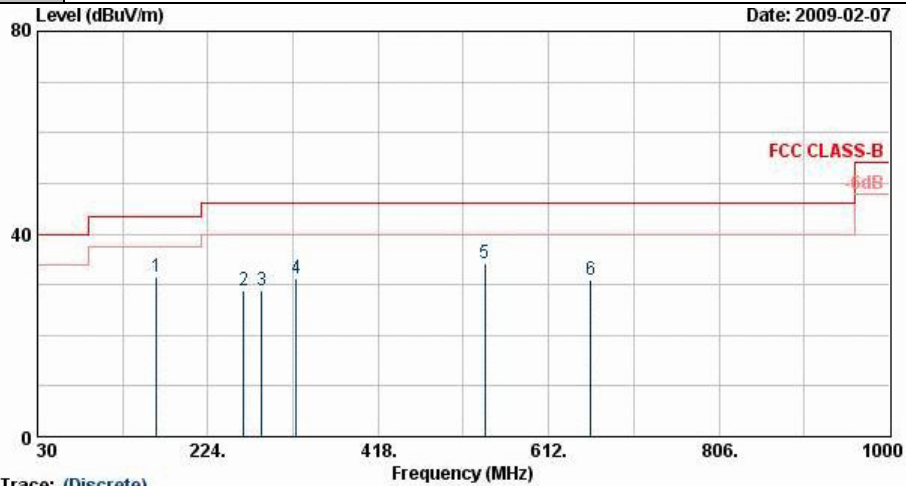


Trace: (Discrete)

Site : 03CH07-HY  
Condition : 3m BILOG\_081118 HORIZONTAL  
Project : FR 8O3027-02  
Mode : Mode 3

|   | Freq   | Level  | Over   | Limit  | Read  | Antenna | Cable | Preamp | Ant | Table |        |
|---|--------|--------|--------|--------|-------|---------|-------|--------|-----|-------|--------|
|   | MHz    | dBuV/m | Limit  | Line   | Level | Factor  | Loss  | Factor | Pos | Pos   | Remark |
|   | MHz    | dBuV/m | dB     | dBuV/m | dBuV  | dB/m    | dB    | dB     | cm  | deg   |        |
| 1 | 165.54 | 31.56  | -11.94 | 43.50  | 51.59 | 9.77    | 1.53  | 31.32  | --- | ---   | Peak   |
| 2 | 265.17 | 28.98  | -17.02 | 46.00  | 45.37 | 13.10   | 1.97  | 31.46  | --- | ---   | Peak   |
| 3 | 285.69 | 28.88  | -17.12 | 46.00  | 45.18 | 13.08   | 2.06  | 31.44  | --- | ---   | Peak   |
| 4 | 324.50 | 31.25  | -14.75 | 46.00  | 46.65 | 13.72   | 2.24  | 31.35  | --- | ---   | Peak   |
| 5 | 539.40 | 34.13  | -11.87 | 46.00  | 44.23 | 17.89   | 3.06  | 31.05  | 100 | 27    | Peak   |
| 6 | 659.80 | 31.01  | -14.99 | 46.00  | 39.48 | 18.99   | 3.44  | 30.90  | --- | ---   | Peak   |

|                        |               |                            |          |
|------------------------|---------------|----------------------------|----------|
| <b>Test Mode :</b>     | Mode 3        | <b>Temperature :</b>       | 20~21°C  |
| <b>Test Channel :</b>  | CH78_2480 MHz | <b>Relative Humidity :</b> | 30~31%   |
| <b>Test Engineer :</b> | Mac Lin       | <b>Polarization :</b>      | Vertical |
| <b>Remark :</b>        |               |                            |          |

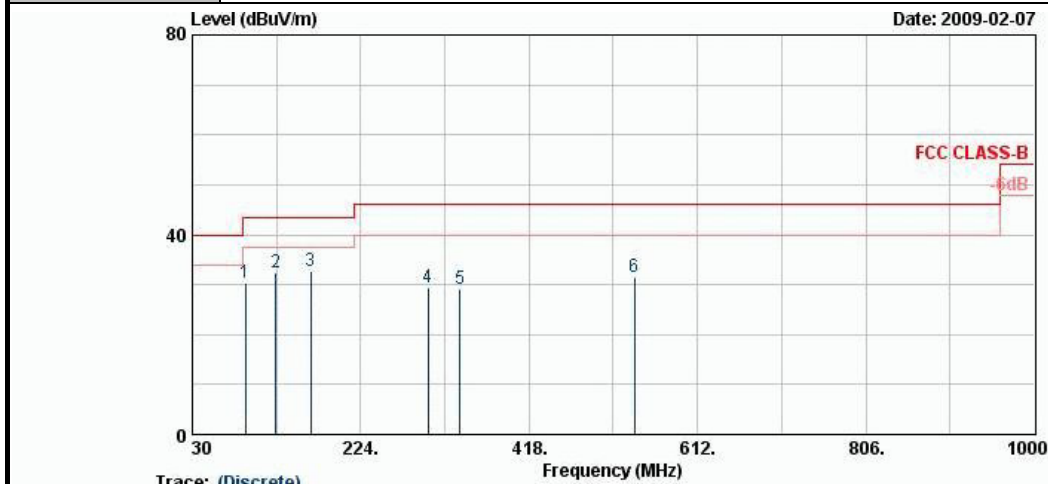


Site : 03CH07-HY  
Condition : 3m BILOG\_081118 VERTICAL  
Project : FR 803027-02  
Mode : Mode 3

|   | Freq   | Level  | Over   | Limit  | ReadAntenna | Cable | Preamp | Ant   | Table |        |
|---|--------|--------|--------|--------|-------------|-------|--------|-------|-------|--------|
|   | MHz    | dBuV/m | Limit  | Line   | Level       | Loss  | Factor | Pos   | Pos   | Remark |
|   |        |        | dB     | dBuV/m | dBuV        | dB    | dB     | cm    | deg   |        |
| 1 | 91.02  | 30.47  | -13.03 | 43.50  | 51.47       | 9.31  | 1.12   | 31.43 | ---   | Peak   |
| 2 | 125.85 | 32.30  | -11.20 | 43.50  | 49.91       | 12.42 | 1.35   | 31.37 | ---   | Peak   |
| 3 | 166.62 | 32.84  | -10.66 | 43.50  | 52.90       | 9.72  | 1.54   | 31.32 | 100   | 319 QP |
| 4 | 301.40 | 29.33  | -16.67 | 46.00  | 45.49       | 13.11 | 2.14   | 31.41 | ---   | Peak   |
| 5 | 338.50 | 29.16  | -16.84 | 46.00  | 44.20       | 14.07 | 2.29   | 31.41 | ---   | Peak   |
| 6 | 539.40 | 31.54  | -14.46 | 46.00  | 41.63       | 17.89 | 3.06   | 31.05 | ---   | Peak   |

**3.8.6 Test Result of Radiated Emission  $\geq 1$ GHz**


|                        |                                   |                            |            |
|------------------------|-----------------------------------|----------------------------|------------|
| <b>Test Mode :</b>     | Mode 1                            | <b>Temperature :</b>       | 20~21°C    |
| <b>Test Channel :</b>  | CH00_2402 MHz                     | <b>Relative Humidity :</b> | 30~31%     |
| <b>Test Engineer :</b> | Mac Lin                           | <b>Polarization :</b>      | Horizontal |
| <b>Remark :</b>        | #3 and #4 are Fundamental Signals |                            |            |

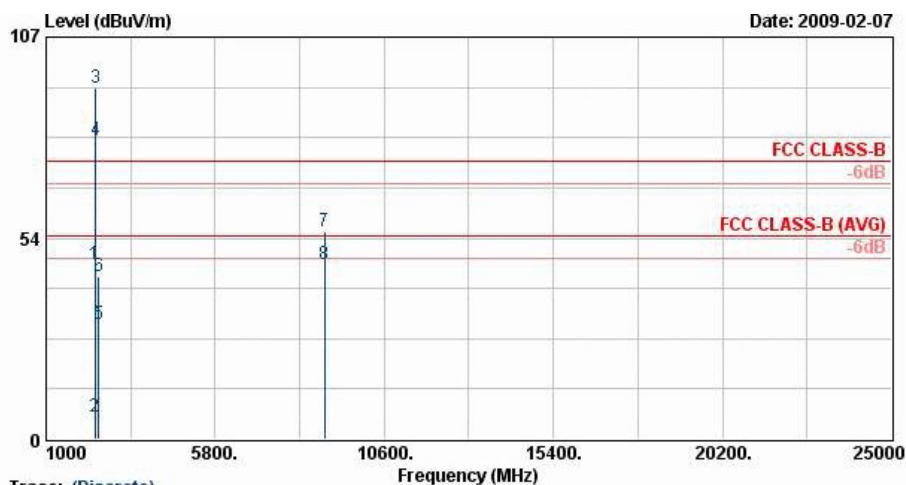

Site : 03CH07-HY  
Condition : 3m SHF-EHF HORN HORIZONTAL  
Project : FR 803027-02  
Mode : Mode 1

|     | Freq    | Level  | Over   | Limit  | Read  | Antenna | Cable | Preamp | Ant | Table |         |
|-----|---------|--------|--------|--------|-------|---------|-------|--------|-----|-------|---------|
|     | MHz     | dBuV/m | Limit  | Line   | Level | Factor  | Loss  | Factor | Pos | Pos   | Remark  |
|     |         |        | dB     | dBuV/m | dBuV  | dB/m    | dB    | dB     | cm  | deg   |         |
| 1   | 2389.42 | 46.41  | -27.59 | 74.00  | 44.31 | 32.32   | 5.46  | 35.68  | 100 | 0     | Peak    |
| 2   | 2389.42 | 6.07   | -47.93 | 54.00  | 3.97  | 32.32   | 5.46  | 35.68  | 164 | 101   | Average |
| 3 @ | 2402.00 | 93.62  |        |        | 91.54 | 32.32   | 5.44  | 35.68  | 100 | 0     | Peak    |
| 4 @ | 2402.00 | 79.71  |        |        | 77.61 | 32.32   | 5.46  | 35.68  | 164 | 101   | Average |
| 5   | 2492.00 | 30.66  | -23.34 | 54.00  | 28.69 | 32.30   | 5.37  | 35.70  | 164 | 101   | Average |
| 6   | 2492.00 | 43.16  | -30.84 | 74.00  | 41.19 | 32.30   | 5.37  | 35.70  | 100 | 0     | Peak    |
| 7   | 8901.00 | 55.45  | -18.55 | 74.00  | 43.04 | 38.64   | 10.31 | 36.54  | 100 | 0     | Peak    |
| 8 @ | 8901.00 | 46.42  | -7.58  | 54.00  | 34.01 | 38.64   | 10.31 | 36.54  | 100 | 158   | Average |

|                        |                                   |                            |          |
|------------------------|-----------------------------------|----------------------------|----------|
| <b>Test Mode :</b>     | Mode 1                            | <b>Temperature :</b>       | 20~21°C  |
| <b>Test Channel :</b>  | CH00_2402 MHz                     | <b>Relative Humidity :</b> | 30~31%   |
| <b>Test Engineer :</b> | Mac Lin                           | <b>Polarization :</b>      | Vertical |
| <b>Remark :</b>        | #3 and #4 are Fundamental Signals |                            |          |

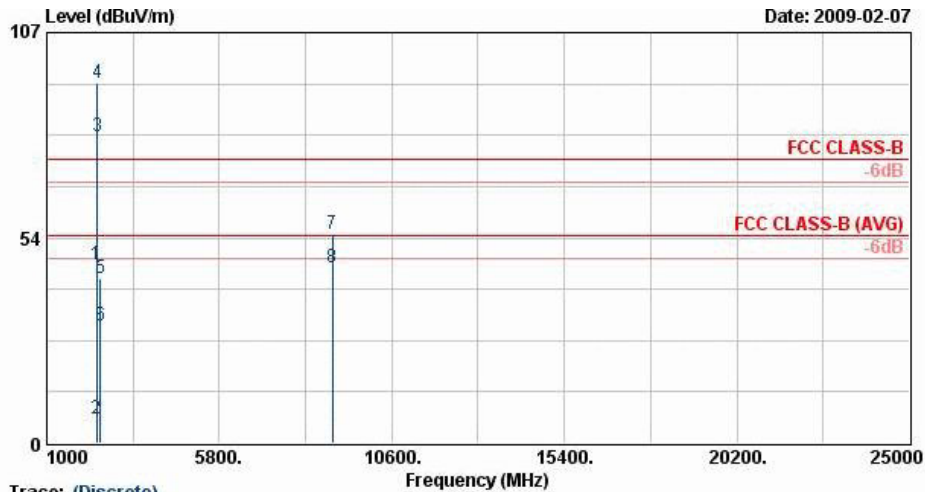


Trace: (Discrete)

Site : 03CH07-HY  
Condition : 3m SHF-EHF HORN VERTICAL  
Project : FR 8O3027-02  
Mode : Mode 1

|     | Freq    | Level  | Over   | Limit  | ReadAntenna  | Cable | Preamp | Ant   | Table |            |
|-----|---------|--------|--------|--------|--------------|-------|--------|-------|-------|------------|
|     | MHz     | dBuV/m | Limit  | Line   | Level Factor | Loss  | Factor | Pos   | Pos   | Remark     |
|     |         |        | dB     | dBuV/m | dBuV         | dB/m  | dB     | dB    | cm    | deg        |
| 1   | 2376.50 | 46.70  | -27.30 | 74.00  | 44.60        | 32.30 | 5.47   | 35.68 | 100   | 0 Peak     |
| 2   | 2376.50 | 6.36   | -47.64 | 54.00  | 4.26         | 32.30 | 5.47   | 35.68 | 100   | 65 Average |
| 3 @ | 2402.00 | 80.04  |        |        | 77.96        | 32.30 | 5.46   | 35.68 | 100   | 65 Average |
| 4 @ | 2402.00 | 93.91  |        |        | 91.85        | 32.30 | 5.44   | 35.68 | 100   | 0 Peak     |
| 5   | 2486.00 | 43.13  | -30.87 | 74.00  | 41.14        | 32.30 | 5.38   | 35.70 | 100   | 0 Peak     |
| 6   | 2486.00 | 30.58  | -23.42 | 54.00  | 28.59        | 32.30 | 5.38   | 35.70 | 100   | 65 Average |
| 7   | 8949.00 | 54.61  | -19.39 | 74.00  | 43.28        | 37.57 | 10.32  | 36.57 | 100   | 0 Peak     |
| 8 @ | 8949.00 | 45.62  | -8.38  | 54.00  | 34.30        | 37.57 | 10.32  | 36.57 | 100   | 28 Average |




|                 |                                   |                     |            |
|-----------------|-----------------------------------|---------------------|------------|
| Test Mode :     | Mode 2                            | Temperature :       | 20~21°C    |
| Test Channel :  | CH39_2441 MHz                     | Relative Humidity : | 30~31%     |
| Test Engineer : | Mac Lin                           | Polarization :      | Horizontal |
| Remark :        | #3 and #4 are Fundamental Signals |                     |            |

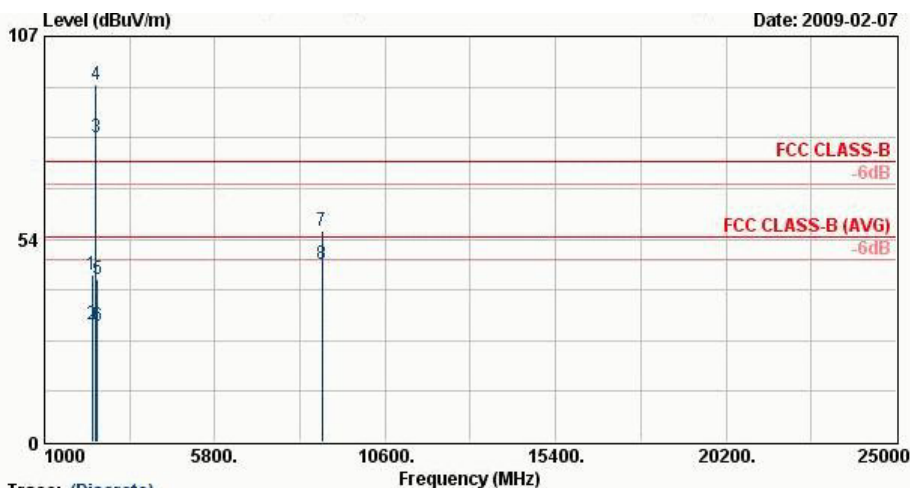

Site : 03CH07-HY  
Condition : FCC CLASS-B 3m SHF-EHF HORN HORIZONTAL  
Project : FR 8O3027-02  
Mode : Mode 2

|     | Freq    | Level  | Over   | Limit  | Read  | Antenna | Cable | Preamp | Ant | Table |         |
|-----|---------|--------|--------|--------|-------|---------|-------|--------|-----|-------|---------|
|     | MHz     | dBuV/m | Limit  | Line   | Level | Factor  | Loss  | Factor | Pos | Pos   | Remark  |
|     |         |        | dB     | dBuV/m | dBuV  | dB/m    | dB    | dB     | cm  | deg   |         |
| 1   | 2340.00 | 44.06  | -29.94 | 74.00  | 41.90 | 32.33   | 5.50  | 35.67  | 100 | 0     | Peak    |
| 2   | 2340.00 | 30.87  | -23.13 | 54.00  | 28.71 | 32.33   | 5.50  | 35.67  | 100 | 9     | Average |
| 3 @ | 2441.00 | 80.40  |        |        | 78.37 | 32.31   | 5.41  | 35.69  | 100 | 9     | Average |
| 4 @ | 2441.00 | 94.28  |        |        | 92.24 | 32.31   | 5.41  | 35.69  | 100 | 0     | Peak    |
| 5   | 2484.00 | 43.12  | -30.88 | 74.00  | 41.13 | 32.30   | 5.38  | 35.70  | 100 | 0     | Peak    |
| 6   | 2484.00 | 30.59  | -23.41 | 54.00  | 28.60 | 32.30   | 5.38  | 35.70  | 100 | 9     | Average |
| 7   | 8826.00 | 55.81  | -18.19 | 74.00  | 43.44 | 38.59   | 10.28 | 36.50  | 100 | 0     | Peak    |
| 8 @ | 8826.00 | 46.84  | -7.16  | 54.00  | 34.46 | 38.59   | 10.28 | 36.50  | 100 | 172   | Average |

|                        |                                   |                            |          |
|------------------------|-----------------------------------|----------------------------|----------|
| <b>Test Mode :</b>     | Mode 2                            | <b>Temperature :</b>       | 20~21°C  |
| <b>Test Channel :</b>  | CH39_2441 MHz                     | <b>Relative Humidity :</b> | 30~31%   |
| <b>Test Engineer :</b> | Mac Lin                           | <b>Polarization :</b>      | Vertical |
| <b>Remark :</b>        | #3 and #4 are Fundamental Signals |                            |          |

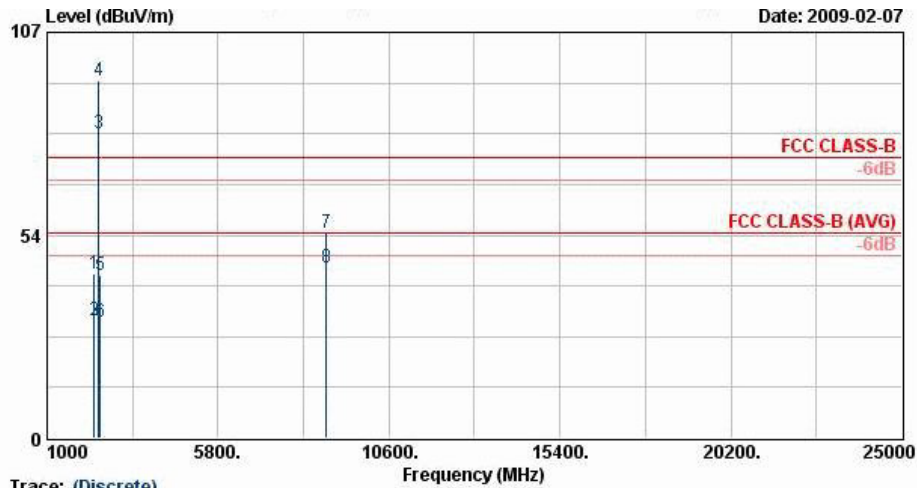


Trace: (Discrete)

Site : 03CH07-HY  
Condition : FCC CLASS-B 3m SHF-EHF HORN VERTICAL  
Project : FR 803027-02  
Mode : Mode 2

|     | Freq    | Level  | Over   | Limit  | Read  | Antenna | Cable | Preamp | Ant | Table |         |
|-----|---------|--------|--------|--------|-------|---------|-------|--------|-----|-------|---------|
|     | MHz     | dBuV/m | Limit  | Line   | Level | Factor  | Loss  | Factor | Pos | Pos   | Remark  |
|     |         |        | dB     | dBuV/m | dBuV  | dB/m    | dB    | dB     | cm  | deg   |         |
| 1   | 2332.00 | 43.23  | -30.77 | 74.00  | 41.08 | 32.30   | 5.51  | 35.67  | 100 | 0     | Peak    |
| 2   | 2332.00 | 30.91  | -23.09 | 54.00  | 28.76 | 32.30   | 5.51  | 35.67  | 109 | 70    | Average |
| 3 @ | 2441.00 | 80.17  |        |        | 78.15 | 32.30   | 5.41  | 35.69  | 109 | 70    | Average |
| 4 @ | 2441.00 | 94.43  |        |        | 92.41 | 32.30   | 5.41  | 35.69  | 100 | 0     | Peak    |
| 5   | 2500.00 | 43.12  | -30.88 | 74.00  | 41.15 | 32.30   | 5.37  | 35.70  | 100 | 0     | Peak    |
| 6   | 2500.00 | 30.77  | -23.23 | 54.00  | 28.80 | 32.30   | 5.37  | 35.70  | 109 | 70    | Average |
| 7   | 8850.00 | 53.95  | -20.05 | 74.00  | 42.66 | 37.51   | 10.29 | 36.51  | 100 | 0     | Peak    |
| 8 @ | 8850.00 | 44.96  | -9.04  | 54.00  | 33.67 | 37.51   | 10.29 | 36.51  | 100 | 35    | Average |

|                        |                                   |                            |            |
|------------------------|-----------------------------------|----------------------------|------------|
| <b>Test Mode :</b>     | Mode 3                            | <b>Temperature :</b>       | 20~21°C    |
| <b>Test Channel :</b>  | CH78_2480 MHz                     | <b>Relative Humidity :</b> | 30~31%     |
| <b>Test Engineer :</b> | Mac Lin                           | <b>Polarization :</b>      | Horizontal |
| <b>Remark :</b>        | #3 and #4 are Fundamental Signals |                            |            |

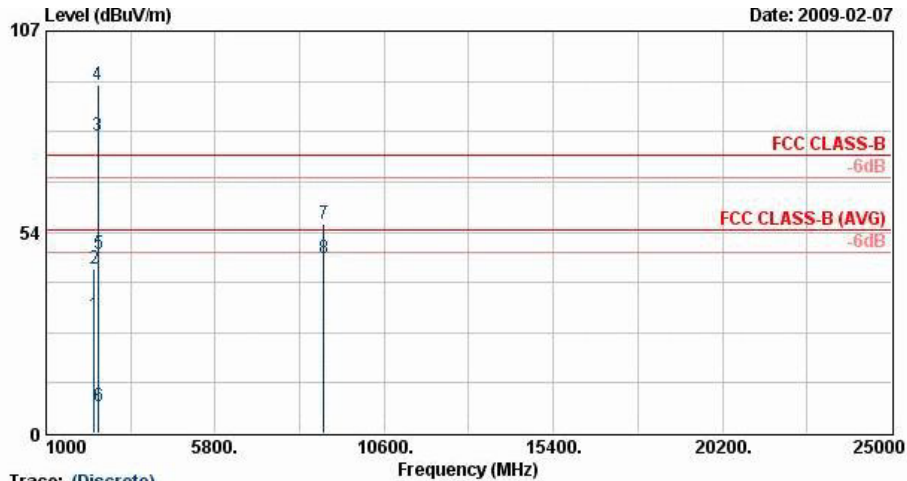


Trace: (Discrete)

Site : 03CH07-HY  
Condition : 3m SHF-EHF HORN HORIZONTAL  
Project : FR 803027-02  
Mode : Mode 3

|     | Freq    | Level  | Over   | Limit  | Read  | Antenna | Cable | Preamp | Ant | Table | Remark  |
|-----|---------|--------|--------|--------|-------|---------|-------|--------|-----|-------|---------|
|     | MHz     | dBuV/m | dB     | dBuV/m | dBuV  | dB/m    | dB    | dB     | cm  | deg   |         |
| 1   | 2372.00 | 31.29  | -22.71 | 54.00  | 29.17 | 32.32   | 5.47  | 35.68  | 100 | 22    | Average |
| 2   | 2372.00 | 43.69  | -30.31 | 74.00  | 41.57 | 32.32   | 5.47  | 35.68  | 100 | 0     | Peak    |
| 3 X | 2480.00 | 78.97  |        |        | 76.98 | 32.30   | 5.38  | 35.70  | 100 | 22    | Average |
| 4 X | 2480.00 | 92.86  |        |        | 90.86 | 32.30   | 5.38  | 35.70  | 100 | 0     | Peak    |
| 5   | 2483.50 | 47.66  | -26.34 | 74.00  | 45.67 | 32.30   | 5.38  | 35.70  | 100 | 0     | Peak    |
| 6   | 2483.50 | 7.32   | -46.68 | 54.00  | 5.33  | 32.30   | 5.38  | 35.70  | 100 | 22    | Average |
| 7   | 8877.00 | 55.53  | -18.47 | 74.00  | 43.14 | 38.62   | 10.30 | 36.53  | 100 | 0     | Peak    |
| 8   | 8877.00 | 46.50  | -7.50  | 54.00  | 34.11 | 38.62   | 10.30 | 36.53  | 100 | 147   | Average |

|                        |                                   |                            |          |
|------------------------|-----------------------------------|----------------------------|----------|
| <b>Test Mode :</b>     | Mode 3                            | <b>Temperature :</b>       | 20~21°C  |
| <b>Test Channel :</b>  | CH78_2480 MHz                     | <b>Relative Humidity :</b> | 30~31%   |
| <b>Test Engineer :</b> | Mac Lin                           | <b>Polarization :</b>      | Vertical |
| <b>Remark :</b>        | #3 and #4 are Fundamental Signals |                            |          |

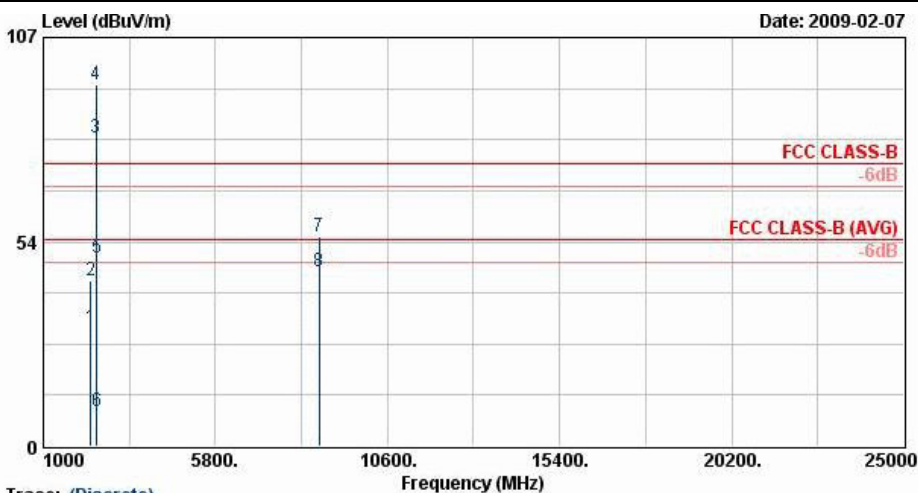

Trace: (Discrete)

Site : 03CH07-HY  
Condition : 3m SHF-EHF HORN VERTICAL  
Project : FR 8O3027-02  
Mode : Mode 3

|     | Freq    | Level  | Over   | Limit  | ReadAntenna | Cable | Preamp | Ant   | Table |            |
|-----|---------|--------|--------|--------|-------------|-------|--------|-------|-------|------------|
|     | MHz     | dBuV/m | Limit  | Line   | Level       | Loss  | Factor | Pos   | Pos   | Remark     |
|     |         |        | dB     | dBuV/m | dBuV        | dB/m  | dB     | dB    | cm    | deg        |
| 1   | 2326.00 | 30.90  | -23.10 | 54.00  | 28.75       | 32.30 | 5.51   | 35.67 | 104   | 2 Average  |
| 2   | 2326.00 | 43.29  | -30.71 | 74.00  | 41.14       | 32.30 | 5.51   | 35.67 | 100   | 0 Peak     |
| 3 @ | 2480.00 | 80.69  |        |        | 78.70       | 32.30 | 5.38   | 35.70 | 104   | 2 Average  |
| 4 X | 2480.00 | 94.50  |        |        | 92.52       | 32.30 | 5.38   | 35.70 | 100   | 0 Peak     |
| 5   | 2483.50 | 49.30  | -24.70 | 74.00  | 47.31       | 32.30 | 5.38   | 35.70 | 100   | 0 Peak     |
| 6   | 2483.50 | 8.96   | -45.04 | 54.00  | 6.97        | 32.30 | 5.38   | 35.70 | 104   | 2 Average  |
| 7   | 8685.00 | 54.78  | -19.22 | 74.00  | 43.54       | 37.41 | 10.24  | 36.41 | 100   | 0 Peak     |
| 8   | 8685.00 | 45.85  | -8.15  | 54.00  | 34.61       | 37.41 | 10.24  | 36.41 | 100   | 81 Average |

## **3.9 Antenna Requirements**

### **3.9.1 Standard Applicable**

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi.

The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

### **3.9.2 Antenna Connected Construction**

The antennas type used in this product is PIFA Antenna without connector and it is considered to meet antenna requirement.

### **3.9.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

## 4 List of Measuring Equipments

| Instrument                | Manufacturer | Model No. | Serial No.  | Characteristics          | Calibration Date | Due Date      | Remark                |
|---------------------------|--------------|-----------|-------------|--------------------------|------------------|---------------|-----------------------|
| Spectrum Analyzer         | R&S          | FSP40     | 100055      | 9kHz~40GHz               | Jun. 26, 2008    | Jun. 25, 2009 | Conducted (TH02-HY)   |
| Power Meter               | Agilent      | E4416A    | GB41292344  | N/A                      | Feb. 21, 2008    | Feb. 20, 2009 | Conducted (TH02-HY)   |
| Power Sensor              | Agilent      | E9327A    | US40441548  | N/A                      | Feb. 21, 2008    | Feb. 20, 2009 | Conducted (TH02-HY)   |
| System Simulator          | R&S          | CMU200    | 117591      | N/A                      | Oct. 23, 2008    | Oct. 22, 2009 | Radiation (03CH07-HY) |
| Bilog Antenna             | SCHAFFNER    | CBL6111C  | 2726        | 30MHz~1GHz               | Nov. 20, 2008    | Nov. 19, 2009 | Radiation (03CH07-HY) |
| Spectrum Analyzer         | R&S          | FSP       | 101067      | 9kHz~30GHz               | Dec. 02, 2008    | Dec. 01, 2009 | Radiation (03CH07-HY) |
| BT Base Station           | R&S          | CBT 2     | 100519      | N/A                      | May 10, 2007     | May 09, 2009  | Radiation (03CH07-HY) |
| SHF-EHF Horn Antenna      | SCHWARZBECK  | BBHA 9170 | BBHA9170251 | 15G - 40GHz              | Oct. 16, 2008    | Oct. 15, 2009 | Radiation (03CH07-HY) |
| Double Ridge Horn Antenna | ESCO         | 3117      | 75962       | 1G~18GHz                 | Aug. 13, 2008    | Aug. 12, 2009 | Radiation (03CH07-HY) |
| Pre Amplifier             | Agilent      | 8449B     | 3008A02362  | 1G~26.5GHz               | Dec. 17, 2008    | Dec. 16, 2009 | Radiation (03CH07-HY) |
| Pre Amplifier             | COM-POWER    | PA-103A   | 161241      | 10~1000MHz.<br>32dB.GAIN | Mar. 31, 2008    | Mar. 30, 2009 | Radiation (03CH07-HY) |
| Double Ridge Horn Antenna | ESCO         | 3117      | 66584       | 1G~18GHz                 | Aug. 06, 2008    | Aug. 05, 2009 | Radiation (03CH07-HY) |
| EMI Receiver              | R&S          | ESCS 30   | 100356      | 9kHz~2.75GHz             | Aug. 01, 2008    | Jul. 31, 2009 | Conduction (CO05-HY)  |
| Two-LISN                  | R&S          | ENV216    | 11-100081   | 9kHz~30MHz               | Nov. 26, 2008    | Nov. 25, 2009 | Conduction (CO05-HY)  |
| Two-LISN                  | R&S          | ENV216    | 11-100080   | 9kHz~30MHz               | Nov. 26, 2008    | Nov. 25, 2009 | Conduction (CO05-HY)  |
| AC Power Source           | APC          | APC-1000W | N/A         | N/A                      | N/A              | N/A           | Conduction (CO05-HY)  |

## 5 Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

| Contribution                                                           | Uncertainty of $x_i$ |                          | $u(x_i)$ |
|------------------------------------------------------------------------|----------------------|--------------------------|----------|
|                                                                        | dB                   | Probability Distribution |          |
| Receiver reading                                                       | 0.10                 | Normal(k=2)              | 0.05     |
| Cable loss                                                             | 0.10                 | Normal(k=2)              | 0.05     |
| AMN insertion loss                                                     | 2.50                 | Rectangular              | 0.63     |
| Receiver Spec                                                          | 1.50                 | Rectangular              | 0.43     |
| Site imperfection                                                      | 1.39                 | Rectangular              | 0.80     |
| Mismatch                                                               | +0.34/-0.35          | U-shape                  | 0.24     |
| <b>Combined standard uncertainty Uc(y)</b>                             | <b>1.13</b>          |                          |          |
| <b>Measuring uncertainty for a level of confidence of 95% U=2Uc(y)</b> | <b>2.26</b>          |                          |          |

### Uncertainty of Radiated Emission Measurement (30MHz ~ 1000MHz)

| Contribution                                                           | Uncertainty of $x_i$ |                          | $u(x_i)$ |
|------------------------------------------------------------------------|----------------------|--------------------------|----------|
|                                                                        | dB                   | Probability Distribution |          |
| Receiver reading                                                       | 0.41                 | Normal(k=2)              | 0.21     |
| Antenna factor calibration                                             | 0.83                 | Normal(k=2)              | 0.42     |
| Cable loss calibration                                                 | 0.25                 | Normal(k=2)              | 0.13     |
| Pre Amplifier Gain calibration                                         | 0.27                 | Normal(k=2)              | 0.14     |
| RCV/SPA specification                                                  | 2.50                 | Rectangular              | 0.72     |
| Antenna Factor Interpolation for Frequency                             | 1.00                 | Rectangular              | 0.29     |
| Site imperfection                                                      | 1.43                 | Rectangular              | 0.83     |
| Mismatch                                                               | +0.39/-0.41          | U-shaped                 | 0.28     |
| <b>Combined standard uncertainty Uc(y)</b>                             | <b>1.27</b>          |                          |          |
| <b>Measuring uncertainty for a level of confidence of 95% U=2Uc(y)</b> | <b>2.54</b>          |                          |          |

**Uncertainty of Radiated Emission Measurement (1GHz ~ 40GHz)**

| Contribution                                                                                                                      | Uncertainty of $x_i$ |                          | $u(x_i)$ | $C_i$ | $C_i * u(x_i)$ |
|-----------------------------------------------------------------------------------------------------------------------------------|----------------------|--------------------------|----------|-------|----------------|
|                                                                                                                                   | dB                   | Probability Distribution |          |       |                |
| Receiver reading                                                                                                                  | $\pm 0.10$           | Normal(k=1)              | 0.10     | 1     | 0.10           |
| Antenna factor calibration                                                                                                        | $\pm 1.70$           | Normal(k=2)              | 0.85     | 1     | 0.85           |
| Cable loss calibration                                                                                                            | $\pm 0.50$           | Normal(k=2)              | 0.25     | 1     | 0.25           |
| Receiver Correction                                                                                                               | $\pm 2.00$           | Rectangular              | 1.15     | 1     | 1.15           |
| Antenna Factor Directional                                                                                                        | $\pm 1.50$           | Rectangular              | 0.87     | 1     | 0.87           |
| Site imperfection                                                                                                                 | $\pm 2.80$           | Triangular               | 1.14     | 1     | 1.14           |
| Mismatch<br>Receiver VSWR $\Gamma_1 = 0.197$<br>Antenna VSWR $\Gamma_2 = 0.194$<br>Uncertainty = $20 \log(1 - \Gamma_1 \Gamma_2)$ | +0.34/-0.35          | U-shaped                 | 0.244    | 1     | 0.244          |
| <b>Combined standard uncertainty <math>U_c(y)</math></b>                                                                          | <b>2.36</b>          |                          |          |       |                |
| <b>Measuring uncertainty for a level of confidence of 95% <math>U = 2U_c(y)</math></b>                                            | <b>4.72</b>          |                          |          |       |                |

## 6 Certification of TAF Accreditation



Certificate No. : L1190-081212

財團法人全國認證基金會  
Taiwan Accreditation Foundation

### Certificate of Accreditation

This is to certify that

**Sporton International Inc.**  
**EMC & Wireless Communications Laboratory**  
No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,  
Taiwan, R.O.C.

**is accredited in respect of laboratory**

|                                       |                                                                                                                                                                                                                                                            |
|---------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Accreditation Criteria</b>         | : ISO/IEC 17025:2005                                                                                                                                                                                                                                       |
| <b>Accreditation Number</b>           | : 1190                                                                                                                                                                                                                                                     |
| <b>Originally Accredited</b>          | : December 15, 2003                                                                                                                                                                                                                                        |
| <b>Effective Period</b>               | : January 10, 2007 to January 09, 2010                                                                                                                                                                                                                     |
| <b>Accredited Scope</b>               | : Testing Field, see described in the Appendix                                                                                                                                                                                                             |
| <b>Specific Accreditation Program</b> | : Accreditation Program for Designated Testing Laboratory for Commodities Inspection<br>Accreditation Program for Telecommunication Equipment Testing Laboratory<br>Accreditation Program for BSMI Mutual Recognition Arrangement with Foreign Authorities |



Jay-San Chen  
President, Taiwan Accreditation Foundation  
Date : December 12, 2008

P1, total 18 pages

The Appendix forms an integral part of this Certificate, which shall be invalid when use without the Appendix



## **Appendix A. Photographs of EUT**

Please refer to Sporton report number EP8O3027-02 as below.