


PCTEST ENGINEERING LABORATORY, INC.
6660 - B Dobbin Road . Columbia, MD 21045 . USA
Telephone 410.290.6652 / Fax 410.290.6654
<http://www.pctestlab.com> (email: randy@pctestlab.com)



CERTIFICATE OF COMPLIANCE CLASS II PERMISSIVE CHANGE

MANUFACTURER NAME & ADDRESS:

SYMBOL TECHNOLOGIES INC.
1 Symbol Plaza
Holtsville, NY 11742-1300
Attn: Mark Luksich, Regulatory Director

DATE & LOCATION OF TESTING:

Date(s) of Tests: February 26-27, 2003
Test Report S/N: 15.230226098.H9P
Test Site: PCTEST Lab, Columbia, MD

FCC ID: H9PLA4137

APPLICANT: SYMBOL TECHNOLOGIES INC.

SUMMARY:


Trade Name/Model No.: Motorola S24
Equipment EUT Type: WLAN Compact Flash Card
Data Transfer Rate(s): 1Mbps, 2Mbps, 5.5Mbps, 11Mbps
Max. Output Power: 0.089 W (Conducted)
Frequency Range: 2412 - 2462 MHz
FCC Classification: FCC Part 15 Spread Spectrum Transceiver (DSS)
FCC Rule Part(s): Parts 15.247; ANSI C-63.4-2001
Test Device Serial No.: S/N: 00A0F83D3194
Permissive Change(s): Added Antenna #SQ2403PV96SMAR / Enclosure
Original Grant Date: August 31, 2001

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C-63.4-2001.

Grant Conditions: Class II Permissive Change. Output is peak conducted. Device is approved for mobile and laptop computer operating configurations with respect to 2.1091 for satisfying RF exposure compliance requirements. This device can only be co-located with approved transmitters shown in this filing. Device is authorized for use with internal PCB chip antenna and the antenna described in this Class II Permissive Change filing only. End-users must be provided with antenna installation and transmitter operating conditions for satisfying RF exposure compliance.

I authorize and attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

PCTEST certifies that no party to this application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 862.


Alfred Cirwthian
Vice President Engineering



15. 230226098. H9P

TABLE OF CONTENTS

EXHIBIT A. ATTESTATION STATEMENTS.....	1
FCC PART 15.247 MEASUREMENT REPORT COVER PAGE	2
1.0 INTRODUCTION.....	3
1.1 EVALUATION PROCEDURE.....	3
1.2 SCOPE.....	3
1.3 PCTEST TEST LOCATION	3
2.0 PRODUCT INFORMATION	4
2.1 EQUIPMENT DESCRIPTION	4
2.2 ENCLOSURE.....	4
2.3 EMI SUPPRESSION DEVICE(S)/MODIFICATIONS.....	4
3.0 DESCRIPTION OF TEST	5
3.1 CONDUCTED EMISSIONS.....	5
3.2 RADIATED EMISSIONS.....	6
4.0 ANTENNA REQUIREMENTS.....	7
5.0 TEST EQUIPMENT CALIBRATION DATA.....	8
6.0 CONCLUSION.....	9
EXHIBIT B. SUMMARY OF TEST RESULTS.....	10
EXHIBIT B. OUTPUT POWER MEASUREMENT	11
EXHIBIT B. RADIATED HARMONIC MEASUREMENTS.....	12-23
EXHIBIT B. RADIATED SPURIOUS MEASUREMENTS	24
EXHIBIT B. RADIATED RESTRICTED BAND MEASUREMENTS	25-26
EXHIBIT C. TEST SETUP PHOTOGRAPHS	27
EXHIBIT D. EUT EXTERNAL/INTERNAL PHOTOGRAPHS	28
EXHIBIT E. MPE REPORT	29
EXHIBIT F. USER'S MANUAL.....	30
EXHIBIT G. ORIGINAL GRANT COPY	31


PCTEST LAB TEST REPORT Part 15.247		FCC MEASUREMENT REPORT			Reviewed by: Quality Manager
Filename: 15.230226098.H9P		Test Dates: February 26-27, 2003	FCC ID: H9PLA4137	Model: Motorola S24	Page i of i

EXHIBIT A – Attestation Statements

PCTEST LAB TEST REPORT Class II Permissive Change		FCC MEASUREMENT REPORT 			Reviewed by: Quality Manager
Filename: 15.230226098.H9P	Test Dates: February 26-27, 2003	FCC ID: H9PLA4137P		Model: Motorola S24	Page 1 of 31



MEASUREMENT REPORT



A. General Information

APPLICANT	SYMBOL TECHNOLOGIES INC.		
APPLICANT ADDRESS	1 Symbol Plaza Holtsville, NY 11742-1300		
TEST SITE	PCTEST ENGINEERING LABORATORY, INC.		
TEST SITE ADDRESS	6660-B Dobbin Road, Columbia, MD 21045 USA		
FCC RULE PART(S)	Parts 15.247; ANSI C-63.4-2001		
MODEL NAME	Motorola S24		
FCC ID	H9PLA4137		
Test Device Serial No.:	S/N:2LKSA01252 <input type="checkbox"/> Production <input checked="" type="checkbox"/> Pre-Production <input type="checkbox"/> Engineering		
FCC CLASSIFICATION	FCC Part 15 Spread Spectrum Transceiver (DSS)		
DATE(S) OF TEST	February 26-27, 2003		
PERMISSIVE CHANGE(S):	Added Antenna #SQ2403PV96SMAR / Enclosure		
ORIGINAL GRANT DATE:	August 31, 2001		

A.1 Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4-2001. Radiated testing was performed at an antenna to EUT distance of 3 meters.

A.2 Test Facility / NVLAP Accreditation

The conducted and radiated tests were performed at PCTEST Engineering Lab in Columbia, MD 21045, U.S.A.

- PCTEST facility an ISO/IEC 17025 FCC registered (PCTEST Reg. No. 90864) test facility with the site description report on file has met all the requirements specified in Section 2.948 of the FCC Rules.
- PCTEST Lab is an ISO/IEC 17025 accredited laboratory by the U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP) in EMC, Telecommunications, and FCC for satisfactory compliance with criteria established in Title 15, Part 285 Code of Federal Regulations. (NVLAP Lab code: 100431-0).
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide by the American National Standards Institute (ANSI)

PCTEST LAB TEST REPORT Class II Permissive Change	 FCC MEASUREMENT REPORT 			Reviewed by: Quality Manager
Filename: 15.230226098.H9P	Test Dates: February 26-27, 2003	FCC ID: H9PLA4137P	Model: Motorola S24	Page 2 of 31

1.0 INTRODUCTION

1.1 Evaluation Procedure

The measurement procedure described in the American National Standard for Methods of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz (ANSI C63.4-2001) and FCC Public Notice dated July 12, 1995 entitled "Guidance on Measurement for Direct Sequence Spread Spectrum System" were used in the measurement of the **Symbol WLAN Compact Flash Card FCC ID: H9PLA4137**.

1.2 Scope

Measurement & determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission.

1.3 PCTEST Test Location

The map at the right shows the location of the PCTEST LABORATORY, its proximity to the FCC Laboratory, the Columbia vicinity are, the Baltimore-Washington Interntl (BWI) airport, the city of Baltimore and the Washington, DC area. (see Figure 1.2-1).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility in New Concept Business Park, Guilford Industrial Park, Columbia, Maryland. The site address is 6660-B Dobbin Road, Columbia, MD 21045. The test site is one of the highest points in the Columbia area with an elevation of 390 feet above mean sea level. The site coordinates are 39° 11'15" N latitude and 76° 49'38" W longitude. The facility is 1.5 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. There are no FM or TV transmitters within 15 miles of the site. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4 on October 19, 2002.

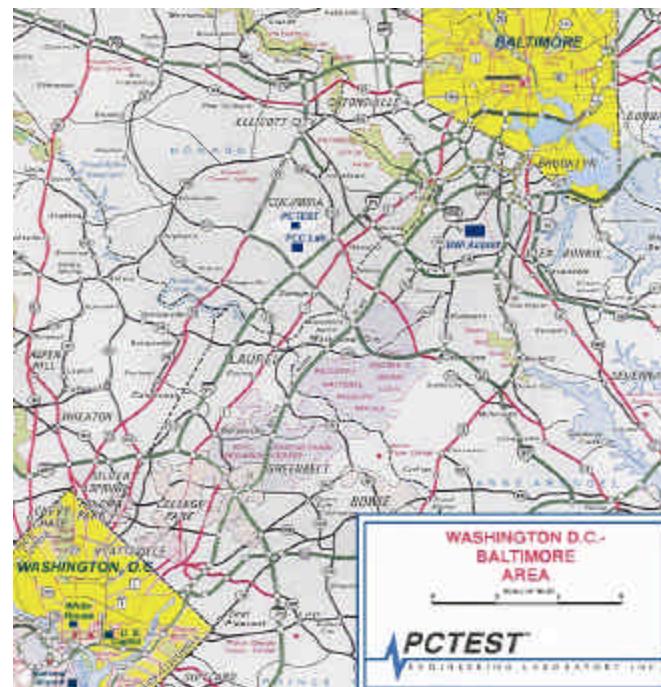


Figure 1.3-1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area

PCTEST LAB TEST REPORT Class II Permissive Change	 FCC MEASUREMENT REPORT		Reviewed by: Quality Manager
Filename: 15.230226098.H9P	Test Dates: February 26-27, 2003	FCC ID: H9PLA4137P	Model: Motorola S24

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Symbol WLAN Compact Flash Card FCC ID: H9PLA4137**. The EUT consisted of the following component(s):

Table 2-1. EUT Equipment Description

Manufacturer / Model / Description	Serial Number
Symbol Technologies, Inc. / Motorola S24	00A0F83D3194

2.2 Operation Mode

The EUT was installed in the Motorola S24 with a different antenna as described herein.

2.3 EMI Suppression Device(s)/Modifications

EMI suppression device(s) added and/or modifications made during testing.

- none

PCTEST LAB TEST REPORT Class II Permissive Change	 FCC MEASUREMENT REPORT		Reviewed by: Quality Manager
Filename: 15.230226098.H9P	Test Dates: February 26-27, 2003	FCC ID: H9PLA4137P	Model: Motorola S24

3.0 DESCRIPTION OF TEST

3.1 Conducted Emissions

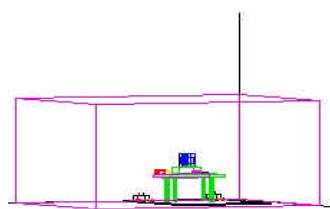


Figure 3.1-1. Shielded Enclosure Line-Conducted Test Facility

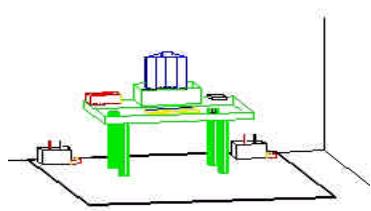


Figure 3.1-2. Line Conducted Emission Test Set-Up

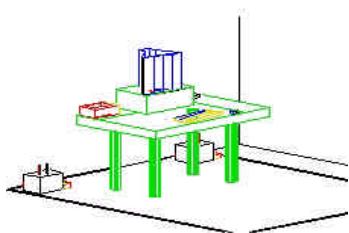


Figure 3.1-3. Wooden Table & Bonded LISNs

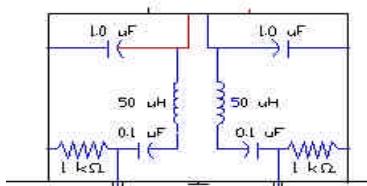


Figure 3.1-4. LISN Schematic Diagram

The line-conducted facility is located inside a 16'x20'x10' shielded enclosure. It is manufactured by Ray Proof Series 81 (see Figure 3.1-1). The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-5. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 1.5m away from the sidewall of the shielded room (see Figure 3.1-2). Solar Electronics and EMCO Model 3725/2 (10kHz-30MHz) 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room (See Figure 3.1-3). The EUT is powered from the Solar LISN and the support equipment is powered from the EMCO LISN. Power to the LISNs are filtered by a high-current high-insertion loss Ray Proof power line filters (100dB 14Hz-10GHz). The purpose of the filter is to attenuate ambient signal interference and this filter is also bonded to the shielded enclosure. All electrical cables are shielded by braided tinned copper zipper tubing with an inner diameter of 1/2". If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the Solar LISN. The LISN schematic diagram is shown (See Figure 3.1-4). All interconnecting cables more than 1 meter were shortened by non-inductive bundling (serpentine fashion) to a 1-meter length. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer to determine the frequency producing the maximum EME from the EUT. The spectrum was scanned from 150kHz to 30Mhz with a 20msec. sweep time. The frequencies producing the maximum level were re-examined using an EMI/Field Intensity Meter and Quasi-Peak adapter. The detector function was set to CISPR quasi-peak and average mode. The bandwidth of the receiver was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each EME emission. Each emission was maximized by: switching power lines; varying the mode of operation or resolution; clock or data exchange speed; scrolling H pattern to the EUT and/or support equipment, and powering the monitor from the floor mounted outlet box and the computer aux AC outlet, if applicable; whichever determined the worst-case emission. Photographs of the worst-case emission can be seen in Exhibit M. Each EME reported was calibrated using the HP8640B signal generator.

PCTEST LAB TEST REPORT Class II Permissive Change	FCC MEASUREMENT REPORT			Reviewed by: Quality Manager
Filename: 15.230226098.H9P	Test Dates: February 26-27, 2003	FCC ID: H9PLA4137P	Model: Motorola S24	Page 5 of 31

3.2 Radiated Emissions

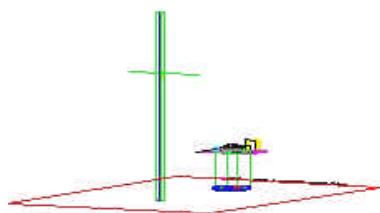


Figure 3.2-1. Meter Test Site

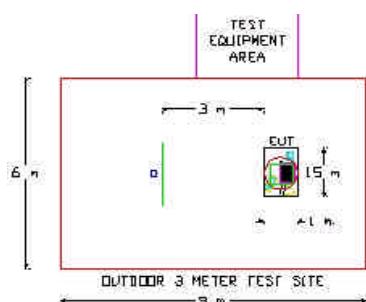


Figure 3.2-2. Dimensions of Outdoor Test Site

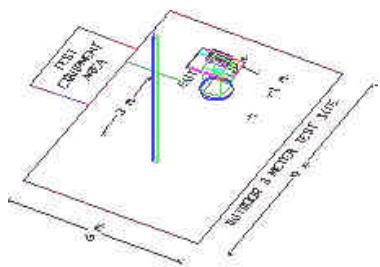


Figure 3.2-3. Turntable and System Setup

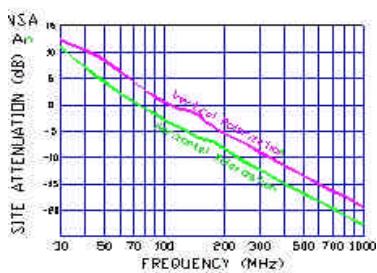


Figure 3.2-4. Normalized Site Attenuation Curves (H&V)

Preliminary measurements were made indoors at 1 meter using broadband antennas, broadband amplifier, and spectrum analyzer to determine the frequency producing the maximum EME. Appropriate precaution was taken to ensure that all EME from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, turntable azimuth with respect to the antenna was noted for each frequency found. The spectrum was scanned from 30 to 200 MHz using biconical antenna and from 200 to 1000 MHz using log-spiral antenna. Above 1 GHz, linearly polarized double ridge horn antennas were used.

Final measurements were made outdoors at 3 meter test range using Roberts™ Dipole antennas or horn antenna (see Figure 3.2-1). The test equipment was placed on a wooden and plastic bench situated on a 1.5 x 2 meter area adjacent to the measurement area (see Figure 3.2-2). Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. Each frequency found during pre-scan measurements was re-examined and investigated using EMI/Field Intensity Meter and Quasi-Peak Adapter. The detector function was set to CISPR quasi-peak mode and the bandwidth of the receiver was set to 100kHz or 1 MHz depending on the frequency or type of signal. Above 1GHz the detector function was set to CISPR average mode (RBW = 1MHz, VBW = 10Hz).

The half-wave dipole antenna was tuned to the frequency found during preliminary radiated measurements. The EUT, support equipment and interconnecting cables were re-configured to the set-up producing the maximum emission for the frequency and were placed on top of a 0.8-meter high non-metallic 1 x 1.5 meter table (see Figure 3.2-3). The EUT, support equipment, and interconnecting cables were re-arranged and manipulated to maximize each EME emission. The turntable containing the system was rotated; the antenna height was varied 1 to 4 meters and stopped at the azimuth or height producing the maximum emission. Each emission was maximized by: varying the mode of operation or resolution; clock or data exchange speed; scrolling H pattern to the EUT and/or support equipment, and powering the monitor from the floor mounted outlet box and the computer aux AC outlet, if applicable; and changing the polarity of the antenna, whichever determined the worst-case emission. Photographs of the worst-case emission can be seen in Exhibit E-G. Each EME reported was calibrated using the HP8640B signal generator. The Theoretical Normalized Site Attenuation Curves for both horizontal and vertical polarization are shown in Figure 3.2-4.

PCTEST LAB TEST REPORT Class II Permissive Change	PCTEST FCC MEASUREMENT REPORT 			Reviewed by: Quality Manager
Filename: 15.230226098.H9P	Test Dates: February 26-27, 2003	FCC ID: H9PLA4137P	Model: Motorola S24	Page 6 of 31

4.0 ANTENNA REQUIREMENTS

An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the applicant can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with this requirement.

The antenna uses a **unique coupled (reverse S)** connector.

Conclusion:

The **Symbol H9PLA4137** unit complies with the requirement of §15.203.

PCTEST LAB TEST REPORT Class II Permissive Change	FCC MEASUREMENT REPORT			Reviewed by: Quality Manager
Filename: 15.230226098.H9P	Test Dates: February 26-27, 2003	FCC ID: H9PLA4137P	Model: Motorola S24	Page 7 of 31

5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST).

Table 5-1. Annual Test Equipment Calibration Schedule

TYPE	MODEL	CAL. DUE DATE	CAL. INTERVAL	SERIAL No.
Microwave Spectrum Analyzer	HP 8566 (100Hz-22GHz)	12/05/03	Annual	3638A08713
Microwave Spectrum Analyzer	HP 8566 (100Hz-22GHz)	04/17/03	Annual	2542A11898
Spectrum Analyzer/Tracking Generator	HP 8591A (9kHz-1.8GHz)	06/02/03	Annual	3144A02458
Spectrum Analyzer	HP 8591A (9kHz-1.8GHz)	10/15/03	Annual	3108A02053
Spectrum Analyzer	HP 8594A (9kHz-2.9GHz)	11/02/03	Annual	3051A00187
Signal Generator	HP 8650B (500Hz-1GHz)	06/02/03	Annual	2232A19558
Signal Generator	HP 8640B (500Hz-1GHz)	06/02/03	Annual	1851A09816
Signal Generator	Rohde & Schwarz (0.1-1GHz)	09/22/03	Annual	894215/012
Ailtech/Eaton Receiver	NM 37/57A-SL (30MHz-1GHz)	04/12/03	Annual	0792-03271
Ailtech/Eaton Receiver	NM 37/57A (30MHz-1GHz)	03/11/03	Annual	0805-03334
Ailtech/Eaton Receiver	NM 17/27A (0.1-32MHz)	09/17/03	Annual	0608-03241
Quasi-Peak Adapter	HP 85650A	08/09/03	Annual	2043A00301
Ailtech/Eaton Adapter	CCA-7 CISPR/ANSI QP Adapter	03/11/03	Annual	0194-04082
RG58 Coax Test Cable	No.167			n/a
Harmonic/Flicker Test System	HP 6841A (IEC 555-2/3)			3531A00115
Broadband Amplifier (2)	HP 8447D			1145A00470, 1937A03348
Broadband Amplifier	HP 8447F			2443A03784
Transient Limiter	HP 11947A (9kHz-200MHz)			2820A00300
Horn Antenna (2)	EMCO Model 3115 (1-18GHz)			9704-5182, 9205-3874
Horn Antenna	EMCO Model 3116 (18-40GHz)			9203-2178
Biconical Antenna (3)	Eaton 94455-1			1295, 1332, 1277
Log-Spiral Antenna (2)	Ailtech/Eaton 93490-1			0227, 1104
Log-Spiral Antenna	Singer 93490-1			147
Roberts Dipoles	Compliance Design (1 set) A100			5118
Ailtech Dipoles	DM-105A (1set)			33448-111
EMCO LISN (3)	3816/2, 3816/2, 3725/2			1077, 1079, 2099
50-ohm Terminator	n/a			n/a
Microwave Preamp 40dB Gain	HP 83017A (0.5-26.5GHz)			3123A00181
Microwave Cables	MicroCoax (1.0-26.5GHz)			n/a
Ailtech/Eaton Receiver	NM37/57A-SL			0792-03271
Spectrum Analyzer	HP 8591A			3034A01395
Modulation Analyzer	HP 8901A			2432A03467
NTSC Pattern Generator	Leader 408			0377433
Noise Figure Meter	HP 8970B, Ailtech 7510			3106A02189, TE31700
Noise Generator	Ailtech 7010			1473
Microwave Survey Meter	Holaday Model 1501 (2.45GHz)			80931
Digital Thermometer	Extech Instruments 421305			426966
Attenuator	HP 8495A (0-70dB) DC-4GHz			
Bi-Directional Coax Coupler	Narda 3020A (50-1000MHz)			
Shielded Screen Room	RF Lindgren Model 26-2/2-0			6710 (PCT270)
Shielded Semi-Anechoic Chamber	Ray Proof Model S81			R2437 (PCT278)
Environmental Chamber	Associated Systems 1025			PCT285
OATS	n/a	12/31/2004	Tri-annual	

PCTEST LAB TEST REPORT Class II Permissive Change	 FCC MEASUREMENT REPORT		Reviewed by: Quality Manager
Filename: 15.230226098.H9P	Test Dates: February 26-27, 2003	FCC ID: H9PLA4137P	Model: Motorola S24

6.0 CONCLUSION

The data collected with the changes described herein, show that the **SYMBOL WLAN Compact Flash Card FCC ID: H9PLA4137** continues to comply with Part 15C of the FCC Rules.

PCTEST LAB TEST REPORT Class II Permissive Change		FCC MEASUREMENT REPORT			Reviewed by: Quality Manager
Filename: 15.230226098.H9P	Test Dates: February 26-27, 2003	FCC ID: H9PLA4137P	Model: Motorola S24		Page 9 of 31

EXHIBIT B – Test Results

Summary

The intentional radiator has been tested in a simulated typical installation to demonstrate compliance with the relevant FCC performance and procedural standards.

The radio was transmitting at full power on the specified channels and at a data rate(s) specified above. The channels tested are high, middle and low of the allocated bands.

Final system data was gathered in a mode that tended to maximize emissions by varying the orientation of the EUT, orientation of power and I/O cabling, antenna search height, and antenna polarization.

Test Date(s):	February 26-27, 2003
Test Engineer:	AI Cirwithian
Method/System:	Direct Sequence Spread Spectrum (DSSS)
Data Transfer Rate(s):	1Mbps, 2Mbps, 5.5Mbps, 11Mbps

Table A-1. Summary of Test Results

FCC Part Section(s)	RSS 210 Section	Test Description	Test Limit	Result
<u>TRANSMITTER MODE (TX)</u>				
15.247(a)(2)		6dB Bandwidth	> 500kHz	Pass *
15.247(b)	6.22(o)(b)	Transmitter Output Power	< 1 Watt	Pass
15.237(d)	6.2.2(o)(b)	Transmitter Power Spectral Density	< 8dBm / 3kHz	Pass *
15.247(c)	5.9.1 6.2.2(o) (e1)	Occupied BandEdge Out-of-Band Emissions (BandEdge at 20dB below)	Radiated <20dBc. Emissions in restricted bands must meet the radiated limits detailed in 15.207	Pass *
15.205 15.209	6.2.1 6.3	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	< FCC 15.209 limits or < RSS-210 table 3 limits Emissions in restricted bands must meet the radiated limits detailed in 15.207	Pass
15.207	6.6	AC Conducted Emissions 150kHz – 30MHz	Class B = 250µV	Pass
<u>RECEIVER MODE (RX)</u>				
15.207	7.4	AC Conducted Emissions 150kHz – 30MHz	Class B = 250µV	Pass
15.209	7.3	General Field Strength Limits (Restricted Bands and Radiated Emissions Limits)	< FCC 15.209 limits or < RSS-210 table 3 limits	Pass

* NOTE: These tests were not performed. Same as original report.

PCTEST LAB TEST REPORT Class II Permissive Change	 FCC MEASUREMENT REPORT		Reviewed by: Quality Manager
Filename: 15.230226098.H9P	Test Dates: February 26-27, 2003	FCC ID: H9PLA4137P	Model: Motorola S24

EXHIBIT B – Test Results (Cont.)

Output Power Measurement

§15.247(b)

A transmitter antenna terminal of EUT is connected to the input of a RF power sensor. Measurement is made while the EUT is operating in transmission mode at the appropriate frequencies.

Minimum Standard – The transmitter peak output power shall not exceed 1 watt.

Data Transfer Rate: 11Mbps

Table A-3. Radiated Output Power Measurements

Frequency (MHz)	Channel No.	Test Results		
		Power Output (dBm)	Power Output (W)	Pass/Fail
2412	1	21.07	0.128	Pass
2437	6	21.27	0.134	Pass
2462	11	21.07	0.128	Pass

Actual data is taken with a peak power meter.
Max. Peak Power + Attenuation = dBm \Rightarrow Watts.

Equivalent Isotropic Radiated Power Measurements by Substitution Method
according to ANSI/TIA/EIA-603-A-2001, Aug. 15, 2001:

The EUT was placed on a wooden turn table 3meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. A Horn antenna was substituted in place of the EUT. This Horn antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the Horn antenna is measured. The difference between the gain of the horn and an isotropic antenna is taken into consideration and the EIRP is recorded.

PCTEST LAB TEST REPORT Class II Permissive Change	 FCC MEASUREMENT REPORT		Reviewed by: Quality Manager
Filename: 15.230226098.H9P	Test Dates: February 26-27, 2003	FCC ID: H9PLA4137P	Model: Motorola S24

EXHIBIT B – Test Results (Cont.)

Radiated Harmonic Measurements

§15.205 & §15.209

Data Transfer Rate: 1 Mbps
 Distance of Measurements: 3 Meters
 Channel: 01

Table A-5. Radiated Harmonic Measurements

Frequency (MHz)	Level (dBm)	AFCL (dB)	POL (H/V)	F/S (mV/m)	F/S (dB _m V/m)	Margin (dB)
4824	-103.7	40.4	V	152.93	43.7	- 10.3
7236	-108.6	47.4	V	195.43	45.8	- 8.2
9648	-122.8	50.3	V	53.09	34.5	- 19.5
12060	-135.0	53.7	V	19.28	25.7	- 28.3

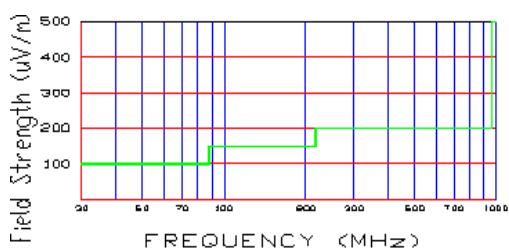


Figure A-5. Restricted band harmonic & spurious limits.

NOTES:

1. All harmonics in the restricted bands specified in §15.205 are below the limit shown in Table G-1. (Note: * = Restricted Band measured frequency)
2. All harmonics/spurs are at least 20 dB below the highest emission in the authorized band using RBW = 100kHz
3. Average Measurements > 1GHz using RBW = 1 MHz VBW = 10 Hz
4. The peak emissions above 1 GHz are not more than 20 dB above the average limit.
5. The antenna is manipulated through typical positions, polarity and length during the tests.
6. The EUT is supplied with nominal AC voltage or/and a new/fully-recharged battery.
7. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
8. < - 135 are below the analyzer floor level.
9. The radiated limits are shown on Figure A-1. Above 1 GHz, the limit is 500 μ V/m (54dB μ /m).

PCTEST LAB TEST REPORT Class II Permissive Change	 FCC MEASUREMENT REPORT		Reviewed by: Quality Manager
Filename: 15.230226098.H9P	Test Dates: February 26-27, 2003	FCC ID: H9PLA4137P	Model: Motorola S24

EXHIBIT B – Test Results (Cont.)

Radiated Harmonic Measurements (Cont.)

§15.205 & §15.209

Data Transfer Rate: 1 Mbps
 Distance of Measurements: 3 Meters
 Channel: 06

Table A-6. Radiated Harmonic Measurements

Frequency (MHz)	Level (dBm)	AFCL (dB)	POL (H/V)	F/S (mV/m)	F/S (dB _m V/m)	Margin (dB)
4874	-103.4	40.5	V	160.33	44.1	- 9.9
7311	-109.0	48.0	V	199.53	46.0	- 8.0
9748	-122.2	50.3	V	56.89	35.1	- 18.9
12185	-135.0	53.7	V	19.28	25.7	- 28.3

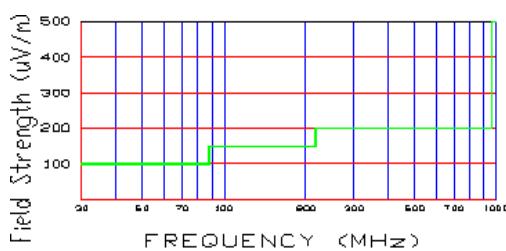


Figure A-6. Restricted band harmonic & spurious limits.

NOTES:

1. All harmonics in the restricted bands specified in §15.205 are below the limit shown in Table G-1. (Note: * = Restricted Band measured frequency)
2. All harmonics/spurs are at least 20 dB below the highest emission in the authorized band using RBW = 100kHz
3. Average Measurements > 1GHz using RBW = 1 MHz VBW = 10 Hz
4. The peak emissions above 1 GHz are not more than 20 dB above the average limit.
5. The antenna is manipulated through typical positions, polarity and length during the tests.
6. The EUT is supplied with nominal AC voltage or/and a new/fully-recharged battery.
7. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
8. < - 135 are below the analyzer floor level.
9. The radiated limits are shown on Figure A-2. Above 1 GHz, the limit is 500 μ V/m (54dB μ /m).

PCTEST LAB TEST REPORT Class II Permissive Change	 FCC MEASUREMENT REPORT		Reviewed by: Quality Manager
Filename: 15.230226098.H9P	Test Dates: February 26-27, 2003	FCC ID: H9PLA4137P	Model: Motorola S24

EXHIBIT B – Test Results (Cont.)

Radiated Harmonic Measurements (Cont.)

§15.205 & §15.209

Data Transfer Rate: 1 Mbps
 Distance of Measurements: 3 Meters
 Channel: 11

Table A-7. Radiated Harmonic Measurements

Frequency (MHz)	Level (dBm)	AFCL (dB)	POL (H/V)	F/S (mV/m)	F/S (dB _m V/m)	Margin (dB)
4924	-103.6	40.7	V	160.33	44.1	- 9.9
7386	-107.6	48.2	V	239.88	47.6	- 6.4
9848	-121.5	50.4	V	62.37	35.9	- 18.1
12310	-135.0	53.8	V	19.50	25.8	- 28.2

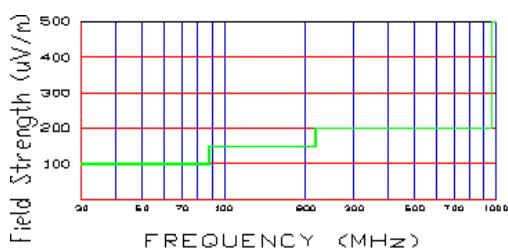


Figure A-7. Restricted band harmonic & spurious limits.

NOTES:

1. All harmonics in the restricted bands specified in §15.205 are below the limit shown in Table G-1. (Note: * = Restricted Band measured frequency)
2. All harmonics/spurs are at least 20 dB below the highest emission in the authorized band using RBW = 100kHz
3. Average Measurements > 1GHz using RBW = 1 MHz VBW = 10 Hz
4. The peak emissions above 1 GHz are not more than 20 dB above the average limit.
5. The antenna is manipulated through typical positions, polarity and length during the tests.
6. The EUT is supplied with nominal AC voltage or/and a new/fully-recharged battery.
7. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
8. < - 135 are below the analyzer floor level.
9. The radiated limits are shown on Figure A-3. Above 1 GHz, the limit is 500 μV/m (54dB_μ/m).

PCTEST LAB TEST REPORT Class II Permissive Change	 FCC MEASUREMENT REPORT		Reviewed by: Quality Manager
Filename: 15.230226098.H9P	Test Dates: February 26-27, 2003	FCC ID: H9PLA4137P	Model: Motorola S24

EXHIBIT B – Test Results (Cont.)

Radiated Harmonic Measurements (Cont.)

§15.205 & §15.209

Data Transfer Rate:	2 Mbps
Distance of Measurements:	3 Meters
Channel:	01

Table A-8. Radiated Harmonic Measurements

Frequency (MHz)	Level (dBm)	AFCL (dB)	POL (H/V)	F/S (mV/m)	F/S (dBmV/m)	Margin (dB)
4824	-103.5	40.4	V	156.50	43.9	- 10.1
7236	-108.5	47.4	V	197.70	45.9	- 8.1
9648	-122.2	50.3	V	56.89	35.1	- 18.9
12060	-135.0	53.7	V	19.28	25.7	- 28.3

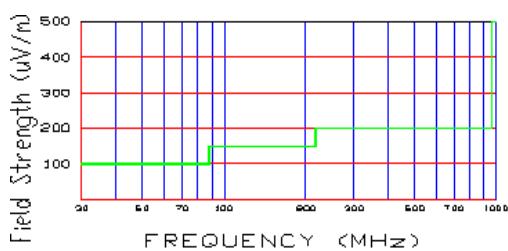


Figure A-8. Restricted band harmonic & spurious limits.

NOTES:

1. All harmonics in the restricted bands specified in §15.205 are below the limit shown in Table G-1. (Note: * = Restricted Band measured frequency)
2. All harmonics/spurs are at least 20 dB below the highest emission in the authorized band using RBW = 100kHz
3. Average Measurements > 1GHz using RBW = 1 MHz VBW = 10 Hz
4. The peak emissions above 1 GHz are not more than 20 dB above the average limit.
5. The antenna is manipulated through typical positions, polarity and length during the tests.
6. The EUT is supplied with nominal AC voltage or/and a new/fully-recharged battery.
7. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
8. < - 135 are below the analyzer floor level.
9. The radiated limits are shown on Figure A-4. Above 1 GHz, the limit is 500 µV/m (54dBµ/m).

PCTEST LAB TEST REPORT Class II Permissive Change	 FCC MEASUREMENT REPORT		Reviewed by: Quality Manager
Filename: 15.230226098.H9P	Test Dates: February 26-27, 2003	FCC ID: H9PLA4137P	Model: Motorola S24

EXHIBIT B – Test Results (Cont.)

Radiated Harmonic Measurements (Cont.)

§15.247(b) / §15.205 & §15.209

Data Transfer Rate: 2 Mbps
 Distance of Measurements: 3 Meters
 Channel: 06

Table A-9. Radiated Harmonic Measurements

Frequency (MHz)	Level (dBm)	AFCL (dB)	POL (H/V)	F/S (mV/m)	F/S (dB _m V/m)	Margin (dB)
4874	-103.2	40.5	V	164.06	44.3	- 9.7
7311	-109.4	48.0	V	190.55	45.6	- 8.4
9748	-122.6	50.3	V	54.33	34.7	- 19.3
12185	-135	53.7	V	19.28	25.7	- 28.3

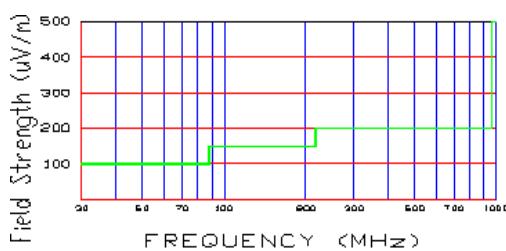


Figure A-9. Restricted band harmonic & spurious limits.

NOTES:

1. All harmonics in the restricted bands specified in §15.205 are below the limit shown in Table G-1. (Note: * = Restricted Band measured frequency)
2. All harmonics/spurs are at least 20 dB below the highest emission in the authorized band using RBW = 100kHz
3. Average Measurements > 1GHz using RBW = 1 MHz VBW = 10 Hz
4. The peak emissions above 1 GHz are not more than 20 dB above the average limit.
5. The antenna is manipulated through typical positions, polarity and length during the tests.
6. The EUT is supplied with nominal AC voltage or/and a new/fully-recharged battery.
7. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
8. < - 135 are below the analyzer floor level.
9. The radiated limits are shown on Figure A-5. Above 1 GHz, the limit is 500 μ V/m (54dB μ /m).

PCTEST LAB TEST REPORT Class II Permissive Change	 FCC MEASUREMENT REPORT		Reviewed by: Quality Manager
Filename: 15.230226098.H9P	Test Dates: February 26-27, 2003	FCC ID: H9PLA4137P	Model: Motorola S24

EXHIBIT B – Test Results (Cont.)

Radiated Harmonic Measurements (Cont.)

§15.247(b) / §15.205 & §15.209

Data Transfer Rate: 2 Mbps
 Distance of Measurements: 3 Meters
 Channel: 11

Table A-10. Radiated Harmonic Measurements

Frequency (MHz)	Level (dBm)	AFCL (dB)	POL (H/V)	F/S (mV/m)	F/S (dB _m V/m)	Margin (dB)
4924	-103.5	40.7	V	162.18	44.2	- 9.8
7386	-107.3	48.2	V	248.31	47.9	- 6.1
9848	-121.2	50.4	V	64.57	36.2	- 17.8
12310	-135.0	53.8	V	19.50	25.8	- 28.2

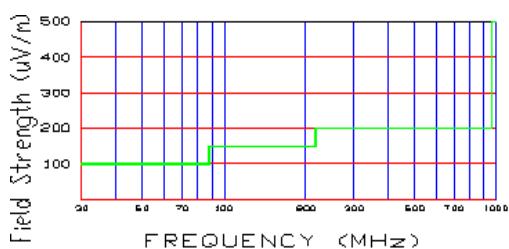


Figure A-10. Restricted band harmonic & spurious limits.

NOTES:

1. All harmonics in the restricted bands specified in §15.205 are below the limit shown in Table G-1. (Note: * = Restricted Band measured frequency)
2. All harmonics/spurs are at least 20 dB below the highest emission in the authorized band using RBW = 100kHz
3. Average Measurements > 1GHz using RBW = 1 MHz VBW = 10 Hz
4. The peak emissions above 1 GHz are not more than 20 dB above the average limit.
5. The antenna is manipulated through typical positions, polarity and length during the tests.
6. The EUT is supplied with nominal AC voltage or/and a new/fully-recharged battery.
7. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
8. < - 135 are below the analyzer floor level.
9. The radiated limits are shown on Figure A-6. Above 1 GHz, the limit is 500 μV/m (54dB_μ/m).

PCTEST LAB TEST REPORT Class II Permissive Change	 FCC MEASUREMENT REPORT		Reviewed by: Quality Manager
Filename: 15.230226098.H9P	Test Dates: February 26-27, 2003	FCC ID: H9PLA4137P	Model: Motorola S24

EXHIBIT B – Test Results (Cont.)

Radiated Harmonic Measurements (Cont.)

§15.247(b) / §15.205 & §15.209

Data Transfer Rate:	<u>5.5 Mbps</u>
Distance of Measurements:	<u>3 Meters</u>
Channel:	<u>01</u>

Table A-11. Radiated Harmonic Measurements

Frequency (MHz)	Level (dBm)	AFCL (dB)	POL (H/V)	F/S (mV/m)	F/S (dB _m V/m)	Margin (dB)
4824	-103.0	40.4	V	165.77	44.4	- 9.6
7236	-108.2	47.4	V	204.64	46.2	- 7.8
9648	-122.0	50.3	V	58.21	35.3	- 18.7
12060	-135.0	53.7	V	19.28	25.7	- 28.3

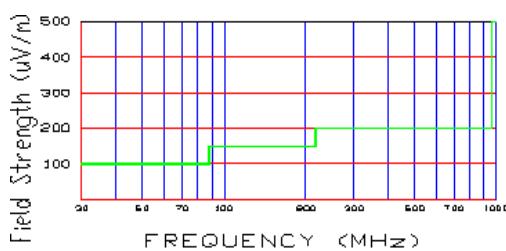


Figure A-11. Restricted band harmonic & spurious limits.

NOTES:

1. All harmonics in the restricted bands specified in §15.205 are below the limit shown in Table G-1. (Note: * = Restricted Band measured frequency)
2. All harmonics/spurs are at least 20 dB below the highest emission in the authorized band using RBW = 100kHz
3. Average Measurements > 1GHz using RBW = 1 MHz VBW = 10 Hz
4. The peak emissions above 1 GHz are not more than 20 dB above the average limit.
5. The antenna is manipulated through typical positions, polarity and length during the tests.
6. The EUT is supplied with nominal AC voltage or/and a new/fully-recharged battery.
7. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
8. < - 135 are below the analyzer floor level.
9. The radiated limits are shown on Figure A-7. Above 1 GHz, the limit is 500 μV/m (54dB_μ/m).

PCTEST LAB TEST REPORT Class II Permissive Change	 FCC MEASUREMENT REPORT		Reviewed by: Quality Manager
Filename: 15.230226098.H9P	Test Dates: February 26-27, 2003	FCC ID: H9PLA4137P	Model: Motorola S24

EXHIBIT B – Test Results (Cont.)

Radiated Harmonic Measurements (Cont.)

§15.247(b) / §15.205 & §15.209

Data Transfer Rate:	<u>5.5 Mbps</u>
Distance of Measurements:	<u>3 Meters</u>
Channel:	<u>06</u>

Table A-12. Radiated Harmonic Measurements

Frequency (MHz)	Level (dBm)	AFCL (dB)	POL (H/V)	F/S (mV/m)	F/S (dB _m V/m)	Margin (dB)
4874	-102.8	40.5	V	171.79	44.7	- 9.3
7311	-109.2	48.0	V	194.98	45.8	- 8.2
9748	-122.5	50.3	V	54.95	34.8	- 19.2
12185	-135.0	53.7	V	19.28	25.7	- 28.3

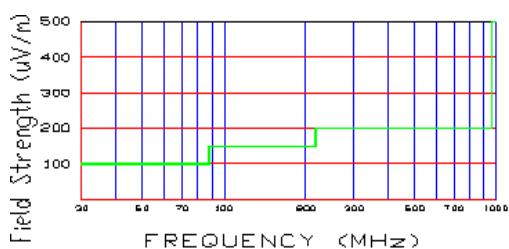


Figure A-12. Restricted band harmonic & spurious limits.

NOTES:

1. All harmonics in the restricted bands specified in §15.205 are below the limit shown in Table G-1. (Note: * = Restricted Band measured frequency)
2. All harmonics/spurs are at least 20 dB below the highest emission in the authorized band using RBW = 100kHz
3. Average Measurements > 1GHz using RBW = 1 MHz VBW = 10 Hz
4. The peak emissions above 1 GHz are not more than 20 dB above the average limit.
5. The antenna is manipulated through typical positions, polarity and length during the tests.
6. The EUT is supplied with nominal AC voltage or/and a new/fully-recharged battery.
7. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
8. < - 135 are below the analyzer floor level.
9. The radiated limits are shown on Figure A-8. Above 1 GHz, the limit is 500 μ V/m (54dB μ /m).

PCTEST LAB TEST REPORT Class II Permissive Change	 FCC MEASUREMENT REPORT		Reviewed by: Quality Manager
Filename: 15.230226098.H9P	Test Dates: February 26-27, 2003	FCC ID: H9PLA4137P	Model: Motorola S24

EXHIBIT B – Test Results (Cont.)

Radiated Harmonic Measurements (Cont.)

§15.247(b) / §15.205 & §15.209

Data Transfer Rate:	<u>5.5 Mbps</u>
Distance of Measurements:	<u>3 Meters</u>
Channel:	<u>11</u>

Table A-13. Radiated Harmonic Measurements

Frequency (MHz)	Level (dBm)	AFCL (dB)	POL (H/V)	F/S (mV/m)	F/S (dB _m V/m)	Margin (dB)
4924	-103.3	40.7	V	165.96	44.4	- 9.6
7386	-107.0	48.2	V	257.04	48.2	- 5.8
9848	-121.7	50.4	V	60.95	35.7	- 18.3
12310	-135.0	53.8	V	19.50	25.8	- 28.2

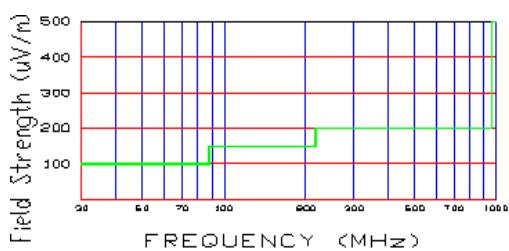


Figure A-13. Restricted band harmonic & spurious limits.

NOTES:

1. All harmonics in the restricted bands specified in §15.205 are below the limit shown in Table G-1. (Note: * = Restricted Band measured frequency)
2. All harmonics/spurs are at least 20 dB below the highest emission in the authorized band using RBW = 100kHz
3. Average Measurements > 1GHz using RBW = 1 MHz VBW = 10 Hz
4. The peak emissions above 1 GHz are not more than 20 dB above the average limit.
5. The antenna is manipulated through typical positions, polarity and length during the tests.
6. The EUT is supplied with nominal AC voltage or/and a new/fully-recharged battery.
7. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
8. < - 135 are below the analyzer floor level.
9. The radiated limits are shown on Figure A-9. Above 1 GHz, the limit is 500 μV/m (54dB_μ/m).

PCTEST LAB TEST REPORT Class II Permissive Change	 FCC MEASUREMENT REPORT		Reviewed by: Quality Manager
Filename: 15.230226098.H9P	Test Dates: February 26-27, 2003	FCC ID: H9PLA4137P	Model: Motorola S24

EXHIBIT B – Test Results (Cont.)

Radiated Harmonic Measurements (Cont.)

§15.247(b) / §15.205 & §15.209

Data Transfer Rate:	11 Mbps
Distance of Measurements:	3 Meters
Channel:	01

Table A-14. Radiated Harmonic Measurements

Frequency (MHz)	Level (dBm)	AFCL (dB)	POL (H/V)	F/S (mV/m)	F/S (dB _m V/m)	Margin (dB)
4824	-102.8	40.4	V	169.63	44.6	- 9.4
7236	-108.0	47.4	V	209.41	46.4	- 7.6
9648	-121.5	50.3	V	61.66	35.8	- 18.2
12060	-135.0	53.7	V	19.28	25.7	- 28.3

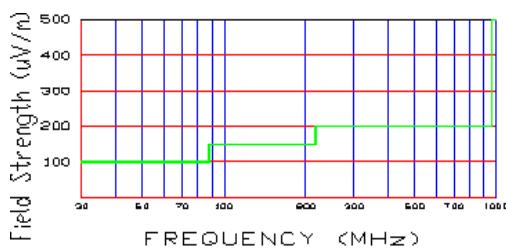


Figure A-14. Restricted band harmonic & spurious limits.

NOTES:

1. All harmonics in the restricted bands specified in §15.205 are below the limit shown in Table G-1. (Note: * = Restricted Band measured frequency)
2. All harmonics/spurs are at least 20 dB below the highest emission in the authorized band using RBW = 100kHz
3. Average Measurements > 1GHz using RBW = 1 MHz VBW = 10 Hz
4. The peak emissions above 1 GHz are not more than 20 dB above the average limit.
5. The antenna is manipulated through typical positions, polarity and length during the tests.
6. The EUT is supplied with nominal AC voltage or/and a new/fully-recharged battery.
7. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
8. < - 135 are below the analyzer floor level.
9. The radiated limits are shown on Figure A-10. Above 1 GHz, the limit is 500 μ V/m (54dB μ /m).

PCTEST LAB TEST REPORT Class II Permissive Change	 FCC MEASUREMENT REPORT		Reviewed by: Quality Manager
Filename: 15.230226098.H9P	Test Dates: February 26-27, 2003	FCC ID: H9PLA4137P	Model: Motorola S24

EXHIBIT B – Test Results (Cont.)

Radiated Harmonic Measurements (Cont.)

§15.247(b) / §15.205 & §15.209

Data Transfer Rate: 11 Mbps
 Distance of Measurements: 3 Meters
 Channel: 06

Table A-15. Radiated Harmonic Measurements

Frequency (MHz)	Level (dBm)	AFCL (dB)	POL (H/V)	F/S (mV/m)	F/S (dB _m V/m)	Margin (dB)
4874	-102.4	40.5	V	179.89	45.1	- 8.9
7311	-109.0	48.0	V	199.53	46.0	- 8.0
9748	-122.3	50.3	V	56.23	35.0	- 19.0
12185	-135.0	53.7	V	19.28	25.7	- 28.3

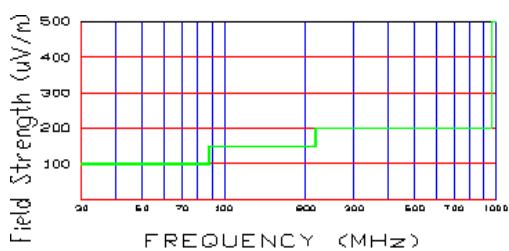


Figure A-15. Restricted band harmonic & spurious limits.

NOTES:

1. All harmonics in the restricted bands specified in §15.205 are below the limit shown in Table G-1. (Note: * = Restricted Band measured frequency)
2. All harmonics/spurs are at least 20 dB below the highest emission in the authorized band using RBW = 100kHz
3. Average Measurements > 1GHz using RBW = 1 MHz VBW = 10 Hz
4. The peak emissions above 1 GHz are not more than 20 dB above the average limit.
5. The antenna is manipulated through typical positions, polarity and length during the tests.
6. The EUT is supplied with nominal AC voltage or/and a new/fully-recharged battery.
7. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
8. < - 135 are below the analyzer floor level.
9. The radiated limits are shown on Figure A-11. Above 1 GHz, the limit is 500 µV/m (54dB_m/m).

PCTEST LAB TEST REPORT Class II Permissive Change	 FCC MEASUREMENT REPORT		Reviewed by: Quality Manager
Filename: 15.230226098.H9P	Test Dates: February 26-27, 2003	FCC ID: H9PLA4137P	Model: Motorola S24

EXHIBIT B – Test Results (Cont.)

Radiated Harmonic Measurements (Cont.)

§15.247(b) / §15.205 & §15.209

Data Transfer Rate:	11 Mbps
Distance of Measurements:	3 Meters
Channel:	11

Table A-16. Radiated Harmonic Measurements

Frequency (MHz)	Level (dBm)	AFCL (dB)	POL (H/V)	F/S (mV/m)	F/S (dB _m V/m)	Margin (dB)
4924	-103.2	40.7	V	167.88	44.5	- 9.5
7386	-107.1	48.2	V	254.10	48.1	- 5.9
9848	-121.5	50.4	V	62.37	35.9	- 18.1
12310	-135.0	53.8	V	19.50	25.8	- 28.2

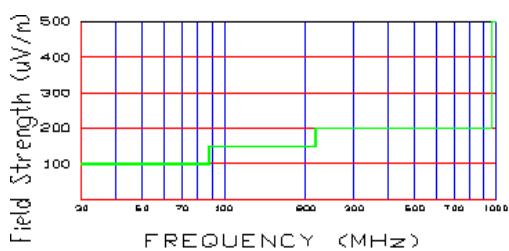


Figure A-16. Restricted band harmonic & spurious limits.

NOTES:

1. All harmonics in the restricted bands specified in §15.205 are below the limit shown in Table G-1. (Note: * = Restricted Band measured frequency)
2. All harmonics/spurs are at least 20 dB below the highest emission in the authorized band using RBW = 100kHz
3. Average Measurements > 1GHz using RBW = 1 MHz VBW = 10 Hz
4. The peak emissions above 1 GHz are not more than 20 dB above the average limit.
5. The antenna is manipulated through typical positions, polarity and length during the tests.
6. The EUT is supplied with nominal AC voltage or/and a new/fully-recharged battery.
7. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
8. < - 135 are below the analyzer floor level.
9. The radiated limits are shown on Figure A-12. Above 1 GHz, the limit is 500 μV/m (54dB_μ/m).

PCTEST LAB TEST REPORT Class II Permissive Change	 FCC MEASUREMENT REPORT		Reviewed by: Quality Manager
Filename: 15.230226098.H9P	Test Dates: February 26-27, 2003	FCC ID: H9PLA4137P	Model: Motorola S24

EXHIBIT B – Test Results (Cont.)

Radiated Spurious Measurements

\$15.205 / \$15.209

Data Transfer Rate: 11 Mbps

Distance of Measurements: 3 Meters

Table A-17. Radiated Measurements at 3-meters

FREQ (MHz)	Level (dBm)	AFCL (dB)	POL (H/V)	Height (m)	Azimuth (° angle)	F/S (uV/M)	Margin (dB)
119.9	-81.7	11.5	V	2.3	90	69.2	-6.7
140.0	-82.5	13.0	H	2.2	180	75.0	-6.0
240.0	-85.5	18.3	V	1.8	70	97.8	-6.2
260.0	-87.5	19.2	V	1.8	90	86.1	-7.3
320.0	-86.5	21.3	V	1.3	210	123.1	-4.2
419.9	-90.0	24.2	V	1.1	180	114.9	-4.8

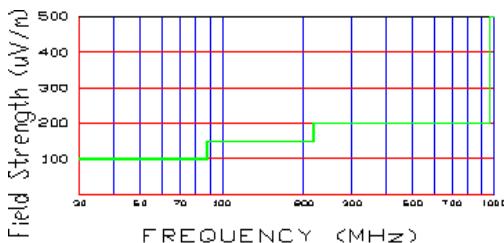


Figure A-17. Limits at 3 meters

NOTES:

1. All emissions were investigated and the worst-case emissions are reported.
2. For hand-held devices, the EUT is rotated through three orthogonal axes to determine which configuration produces the maximum emissions.
3. The EUT is supplied with the minimal AC voltage or/and a new/fully re-charged battery.
4. The EUT was tested up to the 10th harmonic (2.5GHz) and no significant emission was found.
5. The radiated limits are shown on Figure A13. Above 1 GHz the limit is 500uV/m.

PCTEST LAB TEST REPORT Class II Permissive Change		FCC MEASUREMENT REPORT			Reviewed by: Quality Manager
Filename: 15.230226098.H9P	Test Dates: February 26-27, 2003	FCC ID: H9PLA4137P	Model: Motorola S24		Page 24 of 31

EXHIBIT B – Test Results (Cont.)

Radiated Restricted Band Measurements

§15.205 / §15.209

Special attention is made for the EUT's harmonic and spurious radiated emission in the restricted bands of operations. The EUT was tested from 9kHz and up to the tenth harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHZ. Above 1 GHz, average measurement was used, using RBW 1MHz – VBW 10Hz and linearly polarized horn antennas. All harmonics/spurs are at least 20dB below the highest emission in the authorized band using RBW = 100kHz. In addition, peak measurements were taken to ensure that the peak levels are not more than 20dB above the average limit. All out of band emissions, other than those created by the spreading sequence, data sequence, and the carrier modulation must not exceed the limits show in Table G-1 per Section 15.209.

Table A-18. Restricted Band Limits

Frequency	F/S (mV/m)	Measured Distance (Meters)
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

TEST MEASUREMENT EQUIPMENT

HP 8562A	Spectrum Analyzer 50GHz
HP 8566B	Spectrum Analyzer 100Hz – 22GHz
HP 83017A	Microwave Analyzer 40dB Gain (0.5 – 26.5GHz)
HP 3784A	Digital Transmission Analyzer
EMCO 3115	Horn Antenna (1 – 18GHz)
HP 8495A	20dB Attenuator (DC-40GHz) 0 – 70dB
HP 8493B	10dB Attenuator
MicroCoax Cables	Low Loss Microwave Cables (1 – 26.5GHz)
CDI Dipoles	Dipole Antennas (30 – 1000MHz)
EMCO 3116	Horn Antenna (18 – 40GHz)

PCTEST LAB TEST REPORT Class II Permissive Change	 FCC MEASUREMENT REPORT		Reviewed by: Quality Manager
Filename: 15.230226098.H9P	Test Dates: February 26-27, 2003	FCC ID: H9PLA4137P	Model: Motorola S24

EXHIBIT B – Test Results (Cont.)

Radiated Restricted Band Measurements (Cont.)

\$15.205 /\$15.209

Data Transfer Rate:	11 Mbps
Operating Frequency:	2483.5 MHz
Distance of Measurements:	3 Meters

Table A-19. Radiated Restricted Band Measurements at 3-meters

Frequency (MHz)	Level (dBm)	AFCL (dB)	POL (H/V)	F/S (mV/m)	F/S (dBmV/m)	Margin (dB)
2483.9	-99.5	33.0	V	105.93	40.5	-13.5
2484.0	-100.6	33.0	V	93.33	39.4	-14.6
2484.9	-106.3	33.1	V	48.98	33.8	-20.2
2485.2	-114.3	33.1	V	19.50	25.8	-28.2
2490.7	-113.5	33.2	V	21.63	26.7	-27.3
2492.1	-112.9	33.2	V	23.17	27.3	-26.7

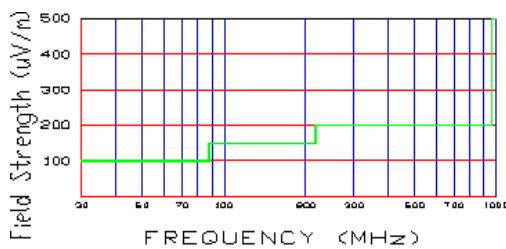


Figure A-18. Limits at 3 meters

NOTES:

1. The antenna is manipulated through typical positions, polarity and length during the testing.
2. The EUT is supplied with the minimal AC voltage or/and a new/fully re-charged battery.
3. The spectrum is measured from 9kHz up to the 10th harmonic and the worst-case emissions are reported.
4. The radiated limits are shown on Figure A-14. Above 1 GHz the limit is 500µV/m.
5. < -135dBm is below the analyzer measurement floor level.

PCTEST LAB TEST REPORT Class II Permissive Change	 FCC MEASUREMENT REPORT		Reviewed by: Quality Manager
Filename: 15.230226098.H9P	Test Dates: February 26-27, 2003	FCC ID: H9PLA4137P	Model: Motorola S24

EXHIBIT C – Test Setup Photographs

PCTEST LAB TEST REPORT Class II Permissive Change		FCC MEASUREMENT REPORT 			Reviewed by: Quality Manager
Filename: 15.230226098.H9P	Test Dates: February 26-27, 2003	FCC ID: H9PLA4137P		Model: Motorola S24	Page 27 of 31

EXHIBIT D – EUT External/Internal Photographs

PCTEST LAB TEST REPORT Class II Permissive Change		FCC MEASUREMENT REPORT 			Reviewed by: Quality Manager
Filename: 15.230226098.H9P	Test Dates: February 26-27, 2003	FCC ID: H9PLA4137P		Model: Motorola S24	Page 28 of 31

EXHIBIT E – MPE Report

PCTEST LAB TEST REPORT Class II Permissive Change		FCC MEASUREMENT REPORT 			Reviewed by: Quality Manager
Filename: 15.230226098.H9P	Test Dates: February 26-27, 2003	FCC ID: H9PLA4137P	Model: Motorola S24	Page 29 of 31	

EXHIBIT F – User's Manual

PCTEST LAB TEST REPORT Class II Permissive Change		FCC MEASUREMENT REPORT 			Reviewed by: Quality Manager
Filename: 15.230226098.H9P	Test Dates: February 26-27, 2003	FCC ID: H9PLA4137P	Model: Motorola S24		Page 30 of 31

EXHIBIT G – Original Grant Copy

PCTEST LAB TEST REPORT Class II Permissive Change		FCC MEASUREMENT REPORT 			Reviewed by: Quality Manager
Filename: 15.230226098.H9P	Test Dates: February 26-27, 2003	FCC ID: H9PLA4137P	Model: Motorola S24		Page 31 of 31