

# FCC SAR Test Report

**Report No.** : SA140609E04  
**Applicant** : Symbol Technologies, Inc.  
**Address** : One Motorola Plaza, Holtsville, NY 11742-1300, USA  
**Product** : MC18 Personal Shopper - Barcode Scanner  
**FCC ID** : H9PMC18N0  
**Brand** : Symbol  
**Model No.** : MC18N0  
**Standards** : FCC 47 CFR Part 2 (2.1093) / IEEE C95.1:1992 / IEEE 1528:2003  
IEEE 1528a-2005 / KDB 865664 D01 v01r03  
KDB 248227 D01 v01r02 / KDB 447498 D01 v05r02  
**Sample Received Date** : Jun. 09, 2014  
**Date of Testing** : Jun. 28, 2014 ~ Jun. 29, 2014

**CERTIFICATION:** The above equipment have been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch – Lin Kou Laboratories**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's SAR characteristics under the conditions specified in this report. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product certification, approval, or endorsement by TAF or any government agencies.

**Prepared By :**

  
Evonne Liu / Specialist

**Approved By :**

  
Roy Wu / Manager



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

## Table of Contents

|                                                                     |           |
|---------------------------------------------------------------------|-----------|
| <b>Release Control Record .....</b>                                 | <b>3</b>  |
| <b>1. Summary of Maximum SAR Value .....</b>                        | <b>4</b>  |
| <b>2. Description of Equipment Under Test .....</b>                 | <b>5</b>  |
| <b>3. SAR Measurement System .....</b>                              | <b>6</b>  |
| 3.1 Definition of Specific Absorption Rate (SAR) .....              | 6         |
| 3.2 SPEAG DASY System .....                                         | 6         |
| 3.2.1 Robot.....                                                    | 7         |
| 3.2.2 Probes.....                                                   | 8         |
| 3.2.3 Data Acquisition Electronics (DAE) .....                      | 8         |
| 3.2.4 Phantoms .....                                                | 9         |
| 3.2.5 Device Holder.....                                            | 10        |
| 3.2.6 System Validation Dipoles.....                                | 10        |
| 3.2.7 Tissue Simulating Liquids.....                                | 11        |
| 3.3 SAR System Verification .....                                   | 14        |
| 3.4 SAR Measurement Procedure .....                                 | 15        |
| 3.4.1 Area & Zoom Scan Procedure .....                              | 15        |
| 3.4.2 Volume Scan Procedure.....                                    | 15        |
| 3.4.3 Power Drift Monitoring.....                                   | 16        |
| 3.4.4 Spatial Peak SAR Evaluation .....                             | 16        |
| 3.4.5 SAR Averaged Methods .....                                    | 16        |
| <b>4. SAR Measurement Evaluation .....</b>                          | <b>17</b> |
| 4.1 EUT Configuration and Setting.....                              | 17        |
| 4.2 EUT Testing Position .....                                      | 17        |
| 4.3 Tissue Verification .....                                       | 17        |
| 4.4 System Validation.....                                          | 18        |
| 4.5 System Verification.....                                        | 18        |
| 4.6 Maximum Output Power.....                                       | 19        |
| 4.6.1 Maximum Conducted Power .....                                 | 19        |
| 4.6.2 Measured Conducted Power Result.....                          | 19        |
| 4.7 SAR Testing Results .....                                       | 20        |
| 4.7.1 SAR Results for Body (Separation Distance is 1.0 cm Gap)..... | 20        |
| 4.7.2 SAR Results for Limbs (Separation Distance is 0 cm Gap).....  | 21        |
| 4.7.3 SAR Measurement Variability.....                              | 22        |
| <b>5. Calibration of Test Equipment.....</b>                        | <b>23</b> |
| <b>6. Measurement Uncertainty.....</b>                              | <b>24</b> |
| <b>7. Information on the Testing Laboratories.....</b>              | <b>26</b> |

**Appendix A. SAR Plots of System Verification**

**Appendix B. SAR Plots of SAR Measurement**

**Appendix C. Calibration Certificate for Probe and Dipole**

**Appendix D. Photographs of EUT and Setup**



## Release Control Record

| Report No.  | Reason for Change | Date Issued   |
|-------------|-------------------|---------------|
| SA140609E04 | Initial release   | Jul. 30, 2014 |
|             |                   |               |
|             |                   |               |
|             |                   |               |

## 1. Summary of Maximum SAR Value

| Equipment Class | Mode      | Highest Reported Body SAR <sub>1g</sub><br>(1.0 cm Gap)<br>(W/kg) | Highest Reported Limbs SAR <sub>10g</sub><br>(0 cm Gap)<br>(W/kg) |
|-----------------|-----------|-------------------------------------------------------------------|-------------------------------------------------------------------|
| DTS             | 2.4G WLAN | 0.10                                                              | 0.16                                                              |
|                 | 5.8G WLAN | 1.19                                                              | 0.81                                                              |
| NII             | 5.2G WLAN | 1.24                                                              | 1.29                                                              |
|                 | 5.3G WLAN | 1.42                                                              | 1.73                                                              |
|                 | 5.6G WLAN | 1.21                                                              | 1.28                                                              |
| DSS             | Bluetooth | N/A                                                               | N/A                                                               |

### Note:

- The SAR limit (**Body: SAR<sub>1g</sub> 1.6 W/kg, Limbs: SAR<sub>10g</sub> 4.0 W/kg**) for general population / uncontrolled exposure is specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992.

# FCC SAR Test Report

## 2. Description of Equipment Under Test

|                                                    |                                                                                                                           |
|----------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------|
| <b>EUT Type</b>                                    | MC18 Personal Shopper - Barcode Scanner                                                                                   |
| <b>FCC ID</b>                                      | H9PMC18N0                                                                                                                 |
| <b>Brand Name</b>                                  | Symbol                                                                                                                    |
| <b>Model Name</b>                                  | MC18N0                                                                                                                    |
| <b>HW Version</b>                                  | Terminal: MC18 MB V2.1<br>1-slot cradle: MC18_Easy_Swap_Cradle_V2.0<br>3-slot cradle: MC18_3-slot_Cradle_V2.1             |
| <b>SW Version</b>                                  | System: WinCE<br>OS Name: Symbol MC18<br>OS version: 07.00.2824<br>OEM version: 99.45.10                                  |
| <b>Wireless (Fusion)</b>                           | Part Number: 31-FUSION-X2.01<br>Fusion version: X_2.01.0.0.074R<br>WLAN Firmware: X_2.01.0.0.180                          |
| <b>XW2DMT (WLAN RF)</b>                            | Version: X_2.01.0.0.3<br>Symbol version: X_2.01.0.0.171<br>WLAN Firmware: X_2.01.0.0.180                                  |
| <b>BTRegTest (WLAN BT)</b>                         | Version: 4.1                                                                                                              |
| <b>Tx Frequency Bands (Unit: MHz)</b>              | WLAN : 2412 ~ 2462, 5180 ~ 5240, 5260 ~ 5320, 5500 ~ 5700, 5745 ~ 5825<br>Bluetooth : 2402 ~ 2480                         |
| <b>Uplink Modulations</b>                          | 802.11b : DSSS<br>802.11a/g/n : OFDM<br>Bluetooth : GFSK                                                                  |
| <b>Maximum Tune-up Conducted Power (Unit: dBm)</b> | WLAN 2.4G : 18.11<br>WLAN 5.2G : 15.92<br>WLAN 5.3G : 17.91<br>WLAN 5.6G : 17.93<br>WLAN 5.8G : 17.69<br>Bluetooth : 1.98 |
| <b>Antenna Type</b>                                | PIFA Antenna                                                                                                              |
| <b>EUT Stage</b>                                   | Identical Prototype                                                                                                       |

### Note:

- The above EUT information is declared by manufacturer and for more detailed features description please refers to the manufacturer's specifications or User's Manual.

### List of Accessory:

|                |                     |                          |
|----------------|---------------------|--------------------------|
| <b>Battery</b> | <b>Brand Name</b>   | Symbol                   |
|                | <b>Model Name</b>   | N/A                      |
|                | <b>Power Rating</b> | 3.7Vdc, 2725mAh, 10.08Wh |
|                | <b>Type</b>         | Li-ion                   |

## FCC SAR Test Report

### 3. SAR Measurement System

#### 3.1 Definition of Specific Absorption Rate (SAR)

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density ( $\rho$ ). The equation description is as below:

$$SAR = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be related to the electrical field in the tissue by


$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where:  $\sigma$  is the conductivity of the tissue,  $\rho$  is the mass density of the tissue and E is the RMS electrical field strength.

#### 3.2 SPEAG DASY System

DASY system consists of high precision robot, probe alignment sensor, phantom, robot controller, controlled measurement server and near-field probe. The robot includes six axes that can move to the precision position of the DASY4/5 software defined. The DASY software can define the area that is detected by the probe. The robot is connected to controlled box. Controlled measurement server is connected to the controlled robot box. The DAE includes amplifier, signal multiplexing, AD converter, offset measurement and surface detection. It is connected to the Electro-optical coupler (ECO). The ECO performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC.

## FCC SAR Test Report

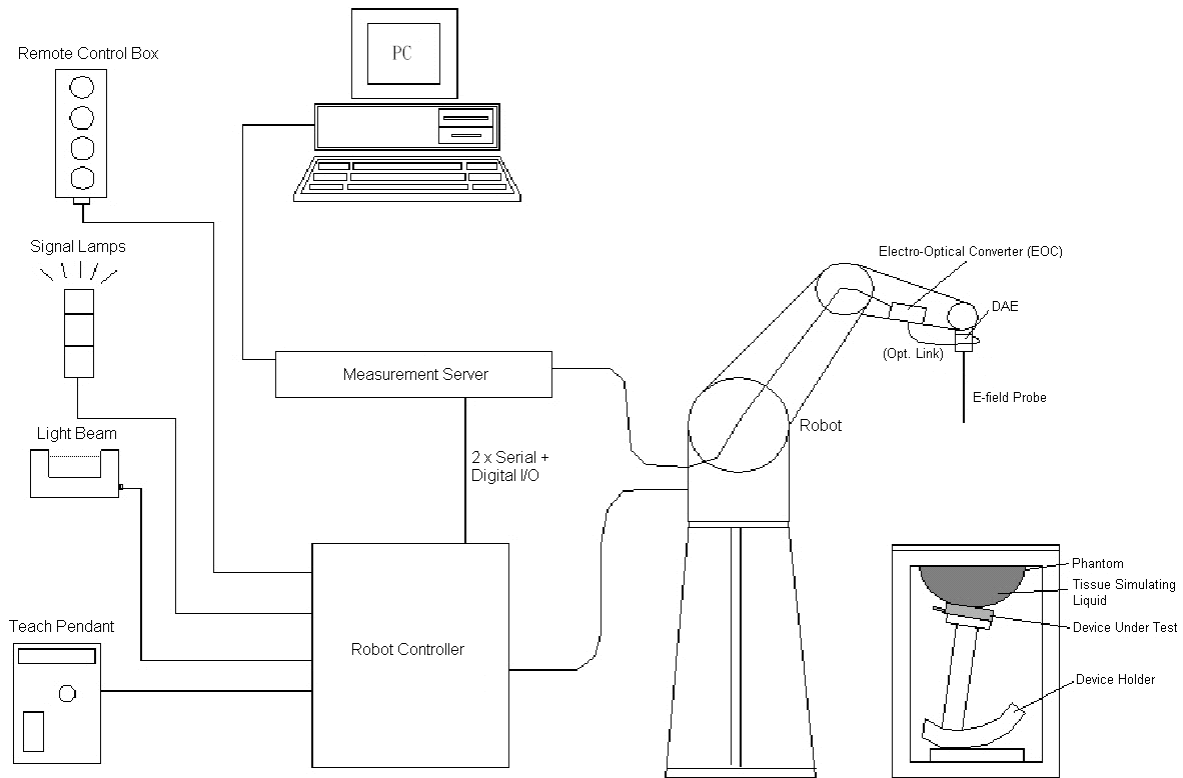

**Fig-3.1 DASY System Setup**

### 3.2.1 Robot

The DASY system uses the high precision robots from Stäubli SA (France). For the 6-axis controller system, the robot controller version (DASY4: CS7MB; DASY5: CS8c) from Stäubli is used. The Stäubli robot series have many features that are important for our application:

- High precision (repeatability  $\pm 0.035$  mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)



**Fig-3.2 DASY4**



**Fig-3.3 DASY5**

## FCC SAR Test Report

### 3.2.2 Probes

The SAR measurement is conducted with the dosimetric probe. The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency.

|                      |                                                                                                                                                          |                                                                                     |
|----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| <b>Model</b>         | EX3DV4                                                                                                                                                   |  |
| <b>Construction</b>  | Symmetrical design with triangular core. Built-in shielding against static charges. PEEK enclosure material (resistant to organic solvents, e.g., DGBE). |                                                                                     |
| <b>Frequency</b>     | 10 MHz to 6 GHz<br>Linearity: $\pm 0.2$ dB                                                                                                               |                                                                                     |
| <b>Directivity</b>   | $\pm 0.3$ dB in HSL (rotation around probe axis)<br>$\pm 0.5$ dB in tissue material (rotation normal to probe axis)                                      |                                                                                     |
| <b>Dynamic Range</b> | 10 $\mu$ W/g to 100 mW/g<br>Linearity: $\pm 0.2$ dB (noise: typically $< 1$ $\mu$ W/g)                                                                   |                                                                                     |
| <b>Dimensions</b>    | Overall length: 337 mm (Tip: 20 mm)<br>Tip diameter: 2.5 mm (Body: 12 mm)<br>Typical distance from probe tip to dipole centers: 1 mm                     |                                                                                     |

|                      |                                                                                                                                                                               |                                                                                      |
|----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| <b>Model</b>         | ES3DV3                                                                                                                                                                        |  |
| <b>Construction</b>  | Symmetrical design with triangular core. Interleaved sensors. Built-in shielding against static charges. PEEK enclosure material (resistant to organic solvents, e.g., DGBE). |                                                                                      |
| <b>Frequency</b>     | 10 MHz to 4 GHz<br>Linearity: $\pm 0.2$ dB                                                                                                                                    |                                                                                      |
| <b>Directivity</b>   | $\pm 0.2$ dB in HSL (rotation around probe axis)<br>$\pm 0.3$ dB in tissue material (rotation normal to probe axis)                                                           |                                                                                      |
| <b>Dynamic Range</b> | 5 $\mu$ W/g to 100 mW/g<br>Linearity: $\pm 0.2$ dB                                                                                                                            |                                                                                      |
| <b>Dimensions</b>    | Overall length: 337 mm (Tip: 20 mm)<br>Tip diameter: 3.9 mm (Body: 12 mm)<br>Distance from probe tip to dipole centers: 2.0 mm                                                |                                                                                      |

### 3.2.3 Data Acquisition Electronics (DAE)

|                             |                                                                                                                                                                                                                                                     |                                                                                       |
|-----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| <b>Model</b>                | DAE3, DAE4                                                                                                                                                                                                                                          |  |
| <b>Construction</b>         | Signal amplifier, multiplexer, A/D converter and control logic. Serial optical link for communication with DASY embedded system (fully remote controlled). Two step probe touch detector for mechanical surface detection and emergency robot stop. |                                                                                       |
| <b>Measurement Range</b>    | -100 to +300 mV (16 bit resolution and two range settings: 4mV, 400mV)                                                                                                                                                                              |                                                                                       |
| <b>Input Offset Voltage</b> | $< 5$ $\mu$ V (with auto zero)                                                                                                                                                                                                                      |                                                                                       |
| <b>Input Bias Current</b>   | $< 50$ fA                                                                                                                                                                                                                                           |                                                                                       |
| <b>Dimensions</b>           | 60 x 60 x 68 mm                                                                                                                                                                                                                                     |                                                                                       |

## FCC SAR Test Report

### 3.2.4 Phantoms

|                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                                     |
|------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| <b>Model</b>           | Twin SAM                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |  |
| <b>Construction</b>    | The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528 and IEC 62209-1. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot. |                                                                                     |
| <b>Material</b>        | Vinylester, glass fiber reinforced (VE-GF)                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                     |
| <b>Shell Thickness</b> | $2 \pm 0.2$ mm ( $6 \pm 0.2$ mm at ear point)                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                                     |
| <b>Dimensions</b>      | Length: 1000 mm<br>Width: 500 mm<br>Height: adjustable feet                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                                     |
| <b>Filling Volume</b>  | approx. 25 liters                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                                                     |

|                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                      |
|------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| <b>Model</b>           | ELI                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |  |
| <b>Construction</b>    | Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles. |                                                                                      |
| <b>Material</b>        | Vinylester, glass fiber reinforced (VE-GF)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                      |
| <b>Shell Thickness</b> | $2.0 \pm 0.2$ mm (bottom plate)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                      |
| <b>Dimensions</b>      | Major axis: 600 mm<br>Minor axis: 400 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                                                                      |
| <b>Filling Volume</b>  | approx. 30 liters                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                                      |

## FCC SAR Test Report

### 3.2.5 Device Holder

|                     |                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                     |
|---------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| <b>Model</b>        | Mounting Device                                                                                                                                                                                                                                                                                                                                                                                                               |  |
| <b>Construction</b> | In combination with the Twin SAM Phantom or ELI4, the Mounting Device enables the rotation of the mounted transmitter device in spherical coordinates. Rotation point is the ear opening point. Transmitter devices can be easily and accurately positioned according to IEC, IEEE, FCC or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). |                                                                                     |
| <b>Material</b>     | POM                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                                     |

|                     |                                                                                                                                                                                                                                                                                         |                                                                                     |
|---------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| <b>Model</b>        | Laptop Extensions Kit                                                                                                                                                                                                                                                                   |  |
| <b>Construction</b> | Simple but effective and easy-to-use extension for Mounting Device that facilitates the testing of larger devices according to IEC 62209-2 (e.g., laptops, cameras, etc.). It is lightweight and fits easily on the upper part of the Mounting Device in place of the phone positioner. |                                                                                     |
| <b>Material</b>     | POM, Acrylic glass, Foam                                                                                                                                                                                                                                                                |                                                                                     |


### 3.2.6 System Validation Dipoles

|                         |                                                                                                                                                                      |                                                                                       |
|-------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| <b>Model</b>            | D-Serial                                                                                                                                                             |  |
| <b>Construction</b>     | Symmetrical dipole with 1/4 balun. Enables measurement of feed point impedance with NWA. Matched for use near flat phantoms filled with tissue simulating solutions. |                                                                                       |
| <b>Frequency</b>        | 750 MHz to 5800 MHz                                                                                                                                                  |                                                                                       |
| <b>Return Loss</b>      | > 20 dB                                                                                                                                                              |                                                                                       |
| <b>Power Capability</b> | > 100 W ( $f < 1\text{GHz}$ ), > 40 W ( $f > 1\text{GHz}$ )                                                                                                          |                                                                                       |

## FCC SAR Test Report

### 3.2.7 Tissue Simulating Liquids

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15 cm. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm. The nominal dielectric values of the tissue simulating liquids in the phantom and the tolerance of 5% are listed in Table-3.1.

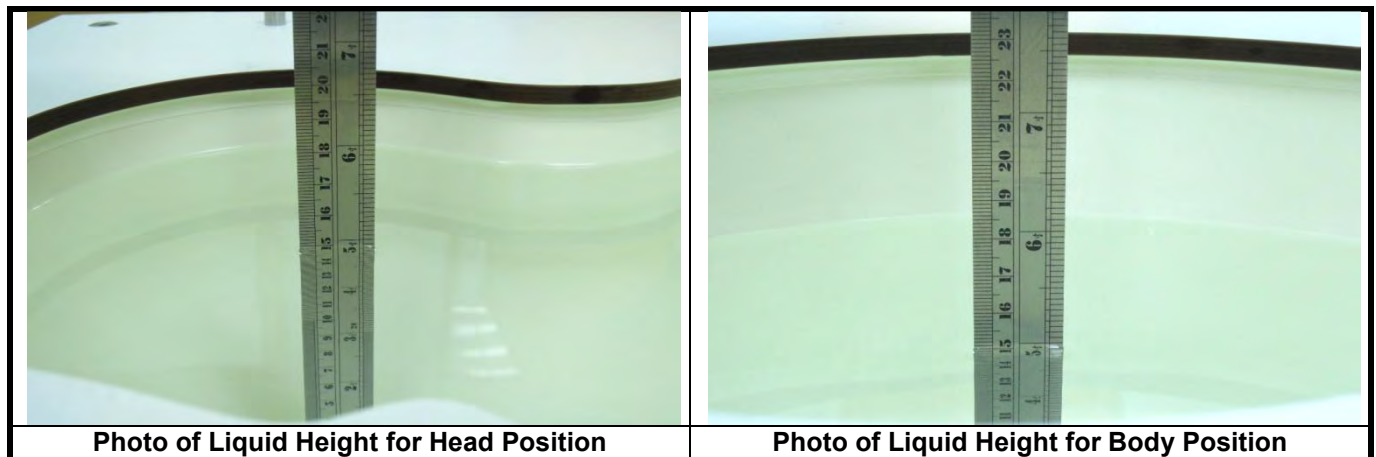

The dielectric properties of the head tissue simulating liquids are defined in IEEE 1528, and KDB 865664 D01 Appendix A. For the body tissue simulating liquids, the dielectric properties are defined in KDB 865664 D01 Appendix A. The dielectric properties of the tissue simulating liquids were verified prior to the SAR evaluation using an Agilent 85070D Dielectric Probe Kit and an Agilent Network Analyzer.

# FCC SAR Test Report

**Table-3.1 Targets of Tissue Simulating Liquid**

| Frequency (MHz) | Target Permittivity | Range of $\pm 5\%$ | Target Conductivity | Range of $\pm 5\%$ |
|-----------------|---------------------|--------------------|---------------------|--------------------|
| <b>For Head</b> |                     |                    |                     |                    |
| 750             | 41.9                | 39.8 ~ 44.0        | 0.89                | 0.85 ~ 0.93        |
| 835             | 41.5                | 39.4 ~ 43.6        | 0.90                | 0.86 ~ 0.95        |
| 900             | 41.5                | 39.4 ~ 43.6        | 0.97                | 0.92 ~ 1.02        |
| 1450            | 40.5                | 38.5 ~ 42.5        | 1.20                | 1.14 ~ 1.26        |
| 1640            | 40.3                | 38.3 ~ 42.3        | 1.29                | 1.23 ~ 1.35        |
| 1750            | 40.1                | 38.1 ~ 42.1        | 1.37                | 1.30 ~ 1.44        |
| 1800            | 40.0                | 38.0 ~ 42.0        | 1.40                | 1.33 ~ 1.47        |
| 1900            | 40.0                | 38.0 ~ 42.0        | 1.40                | 1.33 ~ 1.47        |
| 2000            | 40.0                | 38.0 ~ 42.0        | 1.40                | 1.33 ~ 1.47        |
| 2300            | 39.5                | 37.5 ~ 41.5        | 1.67                | 1.59 ~ 1.75        |
| 2450            | 39.2                | 37.2 ~ 41.2        | 1.80                | 1.71 ~ 1.89        |
| 2600            | 39.0                | 37.1 ~ 41.0        | 1.96                | 1.86 ~ 2.06        |
| 3500            | 37.9                | 36.0 ~ 39.8        | 2.91                | 2.76 ~ 3.06        |
| 5200            | 36.0                | 34.2 ~ 37.8        | 4.66                | 4.43 ~ 4.89        |
| 5300            | 35.9                | 34.1 ~ 37.7        | 4.76                | 4.52 ~ 5.00        |
| 5500            | 35.6                | 33.8 ~ 37.4        | 4.96                | 4.71 ~ 5.21        |
| 5600            | 35.5                | 33.7 ~ 37.3        | 5.07                | 4.82 ~ 5.32        |
| 5800            | 35.3                | 33.5 ~ 37.1        | 5.27                | 5.01 ~ 5.53        |
| <b>For Body</b> |                     |                    |                     |                    |
| 750             | 55.5                | 52.7 ~ 58.3        | 0.96                | 0.91 ~ 1.01        |
| 835             | 55.2                | 52.4 ~ 58.0        | 0.97                | 0.92 ~ 1.02        |
| 900             | 55.0                | 52.3 ~ 57.8        | 1.05                | 1.00 ~ 1.10        |
| 1450            | 54.0                | 51.3 ~ 56.7        | 1.30                | 1.24 ~ 1.37        |
| 1640            | 53.8                | 51.1 ~ 56.5        | 1.40                | 1.33 ~ 1.47        |
| 1750            | 53.4                | 50.7 ~ 56.1        | 1.49                | 1.42 ~ 1.56        |
| 1800            | 53.3                | 50.6 ~ 56.0        | 1.52                | 1.44 ~ 1.60        |
| 1900            | 53.3                | 50.6 ~ 56.0        | 1.52                | 1.44 ~ 1.60        |
| 2000            | 53.3                | 50.6 ~ 56.0        | 1.52                | 1.44 ~ 1.60        |
| 2300            | 52.9                | 50.3 ~ 55.5        | 1.81                | 1.72 ~ 1.90        |
| 2450            | 52.7                | 50.1 ~ 55.3        | 1.95                | 1.85 ~ 2.05        |
| 2600            | 52.5                | 49.9 ~ 55.1        | 2.16                | 2.05 ~ 2.27        |
| 3500            | 51.3                | 48.7 ~ 53.9        | 3.31                | 3.14 ~ 3.48        |
| 5200            | 49.0                | 46.6 ~ 51.5        | 5.30                | 5.04 ~ 5.57        |
| 5300            | 48.9                | 46.5 ~ 51.3        | 5.42                | 5.15 ~ 5.69        |
| 5500            | 48.6                | 46.2 ~ 51.0        | 5.65                | 5.37 ~ 5.93        |
| 5600            | 48.5                | 46.1 ~ 50.9        | 5.77                | 5.48 ~ 6.06        |
| 5800            | 48.2                | 45.8 ~ 50.6        | 6.00                | 5.70 ~ 6.30        |

# FCC SAR Test Report

The following table gives the recipes for tissue simulating liquids.


**Table-3.2 Recipes of Tissue Simulating Liquid**

| Tissue Type | Bactericide | DGBE | HEC | NaCl | Sucrose | Triton X-100 | Water | Diethylene Glycol Mono-hexylether |
|-------------|-------------|------|-----|------|---------|--------------|-------|-----------------------------------|
| H750        | 0.2         | -    | 0.2 | 1.5  | 56.0    | -            | 42.1  | -                                 |
| H835        | 0.2         | -    | 0.2 | 1.5  | 57.0    | -            | 41.1  | -                                 |
| H900        | 0.2         | -    | 0.2 | 1.4  | 58.0    | -            | 40.2  | -                                 |
| H1450       | -           | 43.3 | -   | 0.6  | -       | -            | 56.1  | -                                 |
| H1640       | -           | 45.8 | -   | 0.5  | -       | -            | 53.7  | -                                 |
| H1750       | -           | 47.0 | -   | 0.4  | -       | -            | 52.6  | -                                 |
| H1800       | -           | 44.5 | -   | 0.3  | -       | -            | 55.2  | -                                 |
| H1900       | -           | 44.5 | -   | 0.2  | -       | -            | 55.3  | -                                 |
| H2000       | -           | 44.5 | -   | 0.1  | -       | -            | 55.4  | -                                 |
| H2300       | -           | 44.9 | -   | 0.1  | -       | -            | 55.0  | -                                 |
| H2450       | -           | 45.0 | -   | 0.1  | -       | -            | 54.9  | -                                 |
| H2600       | -           | 45.1 | -   | 0.1  | -       | -            | 54.8  | -                                 |
| H3500       | -           | 8.0  | -   | 0.2  | -       | 20.0         | 71.8  | -                                 |
| H5G         | -           | -    | -   | -    | -       | 17.2         | 65.5  | 17.3                              |
| B750        | 0.2         | -    | 0.2 | 0.8  | 48.8    | -            | 50.0  | -                                 |
| B835        | 0.2         | -    | 0.2 | 0.9  | 48.5    | -            | 50.2  | -                                 |
| B900        | 0.2         | -    | 0.2 | 0.9  | 48.2    | -            | 50.5  | -                                 |
| B1450       | -           | 34.0 | -   | 0.3  | -       | -            | 65.7  | -                                 |
| B1640       | -           | 32.5 | -   | 0.3  | -       | -            | 67.2  | -                                 |
| B1750       | -           | 31.0 | -   | 0.2  | -       | -            | 68.8  | -                                 |
| B1800       | -           | 29.5 | -   | 0.4  | -       | -            | 70.1  | -                                 |
| B1900       | -           | 29.5 | -   | 0.3  | -       | -            | 70.2  | -                                 |
| B2000       | -           | 30.0 | -   | 0.2  | -       | -            | 69.8  | -                                 |
| B2300       | -           | 31.0 | -   | 0.1  | -       | -            | 68.9  | -                                 |
| B2450       | -           | 31.4 | -   | 0.1  | -       | -            | 68.5  | -                                 |
| B2600       | -           | 31.8 | -   | 0.1  | -       | -            | 68.1  | -                                 |
| B3500       | -           | 28.8 | -   | 0.1  | -       | -            | 71.1  | -                                 |
| B5G         | -           | -    | -   | -    | -       | 10.7         | 78.6  | 10.7                              |

## FCC SAR Test Report

### 3.3 SAR System Verification

The system check verifies that the system operates within its specifications. It is performed daily or before every SAR measurement. The system check uses normal SAR measurements in the flat section of the phantom with a matched dipole at a specified distance. The system verification setup is shown as below.

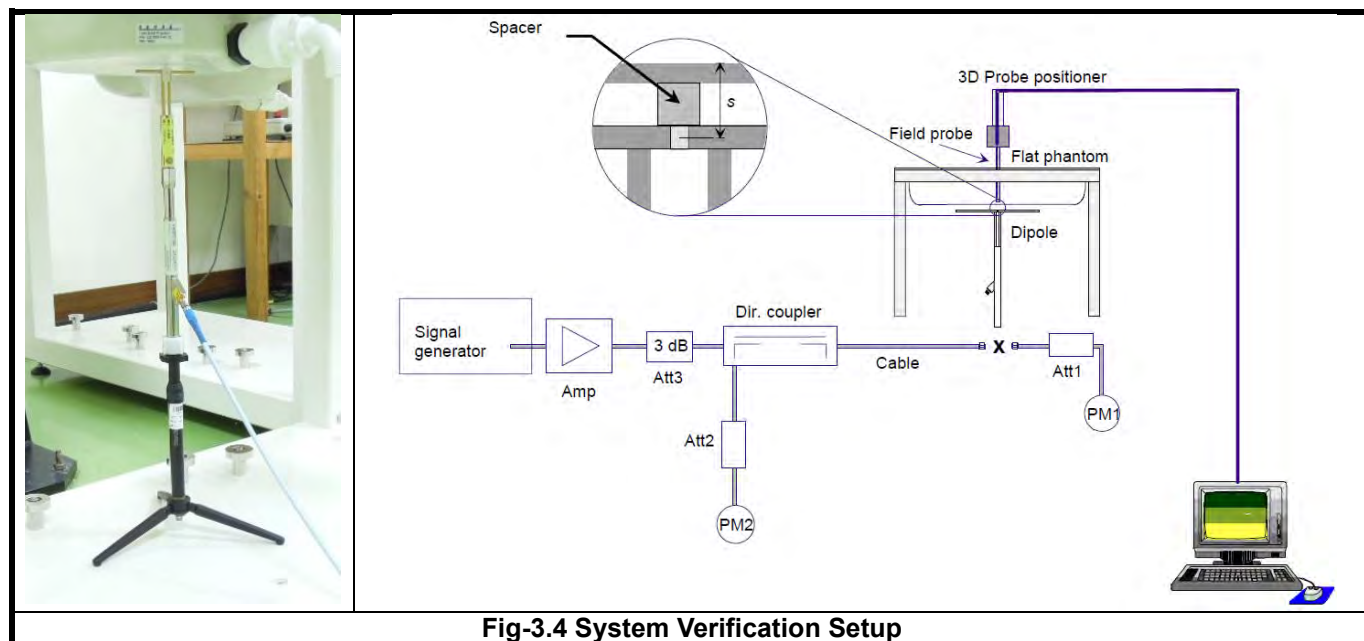

The validation dipole is placed beneath the flat phantom with the specific spacer in place. The distance spacer is touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The power meter PM1 measures the forward power at the location of the system check dipole connector. The signal generator is adjusted for the desired forward power (250 mW is used for 700 MHz to 3 GHz, 100 mW is used for 3.5 GHz to 6 GHz) at the dipole connector and the power meter PM2 is read at that level. After connecting the cable to the dipole, the signal generator is readjusted for the same reading at power meter PM2.

After system check testing, the SAR result will be normalized to 1W forward input power and compared with the reference SAR value derived from validation dipole certificate report. The deviation of system check should be within 10 %.

## FCC SAR Test Report

### 3.4 SAR Measurement Procedure

According to the SAR test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- Power reference measurement
- Area scan
- Zoom scan
- Power drift measurement

The SAR measurement procedures for each of test conditions are as follows:

- Make EUT to transmit maximum output power
- Measure conducted output power through RF cable
- Place the EUT in the specific position of phantom
- Perform SAR testing steps on the DASY system
- Record the SAR value

#### 3.4.1 Area & Zoom Scan Procedure

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g. According to KDB 865664 D01, the resolution for Area and Zoom scan is specified in the table below.

| Items                                 | <= 2 GHz | 2-3 GHz  | 3-4 GHz  | 4-5 GHz  | 5-6 GHz  |
|---------------------------------------|----------|----------|----------|----------|----------|
| Area Scan<br>( $\Delta x, \Delta y$ ) | <= 15 mm | <= 12 mm | <= 12 mm | <= 10 mm | <= 10 mm |
| Zoom Scan<br>( $\Delta x, \Delta y$ ) | <= 8 mm  | <= 5 mm  | <= 5 mm  | <= 4 mm  | <= 4 mm  |
| Zoom Scan<br>( $\Delta z$ )           | <= 5 mm  | <= 5 mm  | <= 4 mm  | <= 3 mm  | <= 2 mm  |
| Zoom Scan<br>Volume                   | >= 30 mm | >= 30 mm | >= 28 mm | >= 25 mm | >= 22 mm |

#### Note:

When zoom scan is required and report SAR is <= 1.4 W/kg, the zoom scan resolution of  $\Delta x / \Delta y$  (2-3GHz: <= 8 mm, 3-4GHz: <= 7 mm, 4-6GHz: <= 5 mm) may be applied.

#### 3.4.2 Volume Scan Procedure

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

## FCC SAR Test Report

### 3.4.3 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drift more than 5%, the SAR will be retested.

### 3.4.4 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

### 3.4.5 SAR Averaged Methods

In DASY, the interpolation and extrapolation are both based on the modified Quadratic Shepard's method. The interpolation scheme combines a least-square fitted function method and a weighted average method which are the two basic types of computational interpolation and approximation.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5 mm.

## FCC SAR Test Report

### 4. SAR Measurement Evaluation

#### 4.1 EUT Configuration and Setting

For WLAN SAR testing, the EUT has installed WLAN engineering testing software which can provide continuous transmitting RF signal. According to KDB 248227 D01, WLAN SAR should tested at the lowest data rate, and testing at higher data rate is not required when the maximum average output power is less than 1/4 dB higher than those measured at the lowest data rate. Since the WLAN power at lowest data rate has highest output power, WLAN SAR for this device was performed at the lowest data rate.

#### 4.2 EUT Testing Position

This hand-held device was tested on the body and limbs exposure conditions. Body SAR was tested on the front face and antenna side (the edge closest to transmitting antenna) with 1 cm separation distance. Limbs SAR was tested on antenna side without separation distance.

According to KDB 447498 D01, the SAR test exclusion condition is based on source-based time-averaged maximum conducted output power, adjusted for tune-up tolerance, and the minimum test separation distance required for the exposure conditions. The SAR exclusion threshold is determined by the following formula.

$$\frac{\text{Max. Tune up Power}_{(\text{mW})}}{\text{Min. Test Separation Distance}_{(\text{mm})}} \times \sqrt{f_{(\text{GHz})}}$$

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

| Mode          | Max. Tune-up Power (dBm) | Max. Tune-up Power (mW) | Body                 |                   |                      | Limbs                |                   |                      |
|---------------|--------------------------|-------------------------|----------------------|-------------------|----------------------|----------------------|-------------------|----------------------|
|               |                          |                         | Ant. to Surface (mm) | Calculated Result | Require SAR Testing? | Ant. to Surface (mm) | Calculated Result | Require SAR Testing? |
| BT (2.48 GHz) | 1.98                     | 2                       | 10                   | 0.3               | No                   | 0                    | 0.6               | No                   |

#### 4.3 Tissue Verification

The measuring results for tissue simulating liquid are shown as below.

| Test Date     | Tissue Type | Frequency (MHz) | Liquid Temp. (°C) | Measured Conductivity (σ) | Measured Permittivity (ε <sub>r</sub> ) | Target Conductivity (σ) | Target Permittivity (ε <sub>r</sub> ) | Conductivity Deviation (%) | Permittivity Deviation (%) |
|---------------|-------------|-----------------|-------------------|---------------------------|-----------------------------------------|-------------------------|---------------------------------------|----------------------------|----------------------------|
| Jun. 29, 2014 | Body        | 2450            | 21.3              | 1.989                     | 51.463                                  | 1.95                    | 52.7                                  | 2.00                       | -2.35                      |
| Jun. 28, 2014 | Body        | 5200            | 21.1              | 5.399                     | 47.771                                  | 5.30                    | 49.0                                  | 1.87                       | -2.51                      |
| Jun. 28, 2014 | Body        | 5300            | 21.1              | 5.542                     | 47.565                                  | 5.42                    | 48.9                                  | 2.25                       | -2.73                      |
| Jun. 28, 2014 | Body        | 5600            | 21.1              | 5.960                     | 46.959                                  | 5.77                    | 48.5                                  | 3.29                       | -3.18                      |
| Jun. 28, 2014 | Body        | 5800            | 21.1              | 6.237                     | 46.574                                  | 6.00                    | 48.2                                  | 3.95                       | -3.37                      |

#### Note:

The dielectric properties of the tissue simulating liquid must be measured within 24 hours before the SAR testing and within ±5% of the target values. Liquid temperature during the SAR testing must be within ±2 °C.

## FCC SAR Test Report

### 4.4 System Validation

The SAR measurement system was validated according to procedures in KDB 865664 D01. The validation status in tabulated summary is as below.

| Test Date     | Probe S/N | Calibration Point |      | Measured Conductivity ( $\sigma$ ) | Measured Permittivity ( $\epsilon_r$ ) | Validation for CW |                 |                | Validation for Modulation |             |      |
|---------------|-----------|-------------------|------|------------------------------------|----------------------------------------|-------------------|-----------------|----------------|---------------------------|-------------|------|
|               |           |                   |      |                                    |                                        | Sensitivity Range | Probe Linearity | Probe Isotropy | Modulation Type           | Duty Factor | PAR  |
| Jun. 29, 2014 | 3590      | Body              | 2450 | 1.989                              | 51.463                                 | Pass              | Pass            | Pass           | OFDM                      | N/A         | Pass |
| Jun. 28, 2014 | 3971      | Body              | 5200 | 5.399                              | 47.771                                 | Pass              | Pass            | Pass           | OFDM                      | N/A         | Pass |
| Jun. 28, 2014 | 3971      | Body              | 5300 | 5.542                              | 47.565                                 | Pass              | Pass            | Pass           | OFDM                      | N/A         | Pass |
| Jun. 28, 2014 | 3971      | Body              | 5600 | 5.960                              | 46.959                                 | Pass              | Pass            | Pass           | OFDM                      | N/A         | Pass |
| Jun. 28, 2014 | 3971      | Body              | 5800 | 6.237                              | 46.574                                 | Pass              | Pass            | Pass           | OFDM                      | N/A         | Pass |
| Jun. 29, 2014 | 3590      | Body              | 2450 | 1.989                              | 51.463                                 | Pass              | Pass            | Pass           | OFDM                      | N/A         | Pass |
| Jun. 28, 2014 | 3820      | Body              | 5200 | 5.399                              | 47.771                                 | Pass              | Pass            | Pass           | OFDM                      | N/A         | Pass |
| Jun. 28, 2014 | 3820      | Body              | 5300 | 5.542                              | 47.565                                 | Pass              | Pass            | Pass           | OFDM                      | N/A         | Pass |
| Jun. 28, 2014 | 3820      | Body              | 5600 | 5.960                              | 46.959                                 | Pass              | Pass            | Pass           | OFDM                      | N/A         | Pass |
| Jun. 28, 2014 | 3820      | Body              | 5800 | 6.237                              | 46.574                                 | Pass              | Pass            | Pass           | OFDM                      | N/A         | Pass |

### 4.5 System Verification

The measuring result for system verification is tabulated as below.

| Test Date     | Mode | Frequency (MHz) | 1W Target SAR-1g (W/kg) | Measured SAR-1g (W/kg) | Normalized to 1W SAR-1g (W/kg) | Deviation (%) | Dipole S/N | Probe S/N | DAE S/N |
|---------------|------|-----------------|-------------------------|------------------------|--------------------------------|---------------|------------|-----------|---------|
| Jun. 29, 2014 | Body | 2450            | 50.00                   | 13.2                   | 52.80                          | 5.60          | 716        | 3590      | 579     |
| Jun. 28, 2014 | Body | 5200            | 74.90                   | 7.80                   | 78.00                          | 4.14          | 1018       | 3971      | 861     |
| Jun. 28, 2014 | Body | 5300            | 75.70                   | 7.76                   | 77.60                          | 2.51          | 1018       | 3971      | 861     |
| Jun. 28, 2014 | Body | 5600            | 80.40                   | 7.95                   | 79.50                          | -1.12         | 1018       | 3971      | 861     |
| Jun. 28, 2014 | Body | 5800            | 74.90                   | 7.91                   | 79.10                          | 5.61          | 1018       | 3971      | 861     |

| Test Date     | Mode | Frequency (MHz) | 1W Target SAR-10g (W/kg) | Measured SAR-10g (W/kg) | Normalized to 1W SAR-10g (W/kg) | Deviation (%) | Dipole S/N | Probe S/N | DAE S/N |
|---------------|------|-----------------|--------------------------|-------------------------|---------------------------------|---------------|------------|-----------|---------|
| Jun. 29, 2014 | Body | 2450            | 23.40                    | 6.03                    | 24.12                           | 3.08          | 716        | 3590      | 579     |
| Jun. 28, 2014 | Body | 5200            | 21.00                    | 2.04                    | 20.40                           | -2.86         | 1018       | 3820      | 1431    |
| Jun. 28, 2014 | Body | 5300            | 21.30                    | 2.12                    | 21.20                           | -0.47         | 1018       | 3820      | 1431    |
| Jun. 28, 2014 | Body | 5600            | 22.40                    | 2.21                    | 22.10                           | -1.34         | 1018       | 3820      | 1431    |
| Jun. 28, 2014 | Body | 5800            | 20.80                    | 2.00                    | 20.00                           | -3.85         | 1018       | 3820      | 1431    |

#### Note:

Comparing to the reference SAR value provided by SPEAG, the validation data should be within its specification of 10 %. The result indicates the system check can meet the variation criterion and the plots can be referred to Appendix A of this report.

# FCC SAR Test Report

## 4.6 Maximum Output Power

### 4.6.1 Maximum Conducted Power

The maximum conducted average power (Unit: dBm) including tune-up tolerance is shown as below.

| Mode         | 2.4G WLAN | 5.2G WLAN | 5.3G WLAN | 5.6G WLAN | 5.8G WLAN |
|--------------|-----------|-----------|-----------|-----------|-----------|
| 802.11b      | 18.11     | N/A       | N/A       | N/A       | N/A       |
| 802.11g      | 17.78     | N/A       | N/A       | N/A       | N/A       |
| 802.11a      | N/A       | 15.92     | 17.91     | 17.87     | 17.68     |
| 802.11n HT20 | 17.87     | 15.86     | 17.81     | 17.93     | 17.69     |

| Mode | Bluetooth |
|------|-----------|
| All  | 1.98      |

### 4.6.2 Measured Conducted Power Result

The measuring conducted average power (Unit: dBm) is shown as below.

#### <WLAN 2.4G>

| Mode                      | 802.11b        |          |           |
|---------------------------|----------------|----------|-----------|
| Channel / Frequency (MHz) | 1 (2412)       | 6 (2437) | 11 (2462) |
| Average Power             | 18.05          | 18.11    | 18.07     |
| Mode                      | 802.11g        |          |           |
| Channel / Frequency (MHz) | 1 (2412)       | 6 (2437) | 11 (2462) |
| Average Power             | 15.20          | 17.78    | 15.84     |
| Mode                      | 802.11n (HT20) |          |           |
| Channel / Frequency (MHz) | 1 (2412)       | 6 (2437) | 11 (2462) |
| Average Power             | 14.80          | 17.87    | 15.99     |

#### <WLAN 5.2G>

| Mode                      | 802.11a        |           |           |           |
|---------------------------|----------------|-----------|-----------|-----------|
| Channel / Frequency (MHz) | 36 (5180)      | 40 (5200) | 44 (5220) | 48 (5240) |
| Average Power             | 15.83          | 15.81     | 15.92     | 15.83     |
| Mode                      | 802.11n (HT20) |           |           |           |
| Channel / Frequency (MHz) | 36 (5180)      | 40 (5200) | 44 (5220) | 48 (5240) |
| Average Power             | 15.82          | 15.86     | 15.76     | 15.72     |

#### <WLAN 5.3G>

| Mode                      | 802.11a        |           |           |           |
|---------------------------|----------------|-----------|-----------|-----------|
| Channel / Frequency (MHz) | 52 (5260)      | 56 (5280) | 60 (5300) | 64 (5320) |
| Average Power             | 17.87          | 17.84     | 17.91     | 16.21     |
| Mode                      | 802.11n (HT20) |           |           |           |
| Channel / Frequency (MHz) | 52 (5260)      | 56 (5280) | 60 (5300) | 64 (5320) |
| Average Power             | 17.81          | 17.73     | 17.76     | 16.08     |

# FCC SAR Test Report

## <WLAN 5.6G>

| Mode                      | 802.11a        |            |            |            |              |            |              |            |
|---------------------------|----------------|------------|------------|------------|--------------|------------|--------------|------------|
| Channel / Frequency (MHz) | 100 (5500)     | 104 (5520) | 108 (5540) | 112 (5560) | 116 (5580)   | 132 (5660) | 136 (5680)   | 140 (5700) |
| Average Power             | 17.02          | 17.72      | 17.81      | 17.74      | 17.78        | 17.72      | <b>17.87</b> | 15.83      |
| Mode                      | 802.11n (HT20) |            |            |            |              |            |              |            |
| Channel / Frequency (MHz) | 100 (5500)     | 104 (5520) | 108 (5540) | 112 (5560) | 116 (5580)   | 132 (5660) | 136 (5680)   | 140 (5700) |
| Average Power             | 16.41          | 17.82      | 17.83      | 17.76      | <b>17.93</b> | 17.53      | 17.73        | 15.76      |

## <WLAN 5.8G>

| Mode                      | 802.11a        |            |            |            |              |
|---------------------------|----------------|------------|------------|------------|--------------|
| Channel / Frequency (MHz) | 149 (5745)     | 153 (5765) | 157 (5785) | 161 (5805) | 165 (5825)   |
| Average Power             | <b>17.68</b>   | 17.61      | 17.63      | 17.46      | 17.32        |
| Mode                      | 802.11n (HT20) |            |            |            |              |
| Channel / Frequency (MHz) | 149 (5745)     | 153 (5765) | 157 (5785) | 161 (5805) | 165 (5825)   |
| Average Power             | 17.62          | 17.58      | 17.64      | 17.63      | <b>17.69</b> |

## 4.7 SAR Testing Results

### 4.7.1 SAR Results for Body (Separation Distance is 1.0 cm Gap)

| Plot No. | Band    | Mode | Test Position | Ch. | Max. Tune-up Power (dBm) | Measured Conducted Power (dBm) | Scaling Factor | Power Drift (dB) | Measured SAR-1g (W/kg) | Scaled SAR-1g (W/kg) |
|----------|---------|------|---------------|-----|--------------------------|--------------------------------|----------------|------------------|------------------------|----------------------|
| 01       | 802.11b | -    | Front Face    | 6   | 18.11                    | 18.11                          | 1.00           | -0.03            | 0.074                  | 0.07                 |
|          | 802.11b | -    | ANT Side      | 6   | 18.11                    | 18.11                          | 1.00           | 0.06             | 0.096                  | <b>0.10</b>          |
|          | 802.11n | HT20 | ANT Side      | 6   | 17.87                    | 17.87                          | 1.00           | 0.11             | 0.051                  | 0.05                 |
| 02       | 802.11a | -    | Front Face    | 44  | 15.92                    | 15.92                          | 1.00           | -0.08            | 0.37                   | 0.37                 |
|          | 802.11a | -    | ANT Side      | 44  | 15.92                    | 15.92                          | 1.00           | 0.04             | 1.01                   | 1.01                 |
|          | 802.11a | -    | ANT Side      | 36  | 15.92                    | 15.83                          | 1.02           | 0.08             | 0.849                  | 0.87                 |
|          | 802.11n | HT20 | ANT Side      | 40  | 15.86                    | 15.86                          | 1.00           | 0.06             | 1.05                   | 1.05                 |
|          | 802.11n | HT20 | ANT Side      | 44  | 15.86                    | 15.76                          | 1.02           | 0.01             | 1.21                   | <b>1.24</b>          |
|          | 802.11n | HT20 | ANT Side      | 44  | 15.86                    | 15.76                          | 1.02           | 0.07             | 1.18                   | 1.21                 |
| 03       | 802.11a | -    | Front Face    | 60  | 17.91                    | 17.91                          | 1.00           | -0.13            | 0.479                  | 0.48                 |
|          | 802.11a | -    | ANT Side      | 60  | 17.91                    | 17.91                          | 1.00           | -0.04            | 1.42                   | <b>1.42</b>          |
|          | 802.11a | -    | ANT Side      | 52  | 17.91                    | 17.87                          | 1.01           | -0.07            | 1.31                   | 1.32                 |
|          | 802.11n | HT20 | ANT Side      | 52  | 17.81                    | 17.81                          | 1.00           | 0.07             | 1.09                   | 1.09                 |
|          | 802.11n | HT20 | ANT Side      | 60  | 17.81                    | 17.76                          | 1.01           | -0.07            | 1.34                   | 1.36                 |
|          | 802.11a | -    | ANT Side      | 60  | 17.91                    | 17.91                          | 1.00           | -0.06            | 1.41                   | 1.41                 |

### Note:

- According to KDB 248227, when the extrapolated maximum peak SAR for the maximum output power channel is  $\leq 1.6$  W/kg and the 1g averaged SAR is  $\leq 0.8$  W/kg, WLAN SAR testing for other channels is not required.
- SAR testing for 802.11g is not required when its maximum power is less than 1/4 dB higher than 802.11b.

# FCC SAR Test Report

| Plot No. | Band    | Mode | Test Position | Ch. | Max. Tune-up Power (dBm) | Measured Conducted Power (dBm) | Scaling Factor | Power Drift (dB) | Measured SAR-1g (W/kg) | Scaled SAR-1g (W/kg) |
|----------|---------|------|---------------|-----|--------------------------|--------------------------------|----------------|------------------|------------------------|----------------------|
|          | 802.11a | -    | Front Face    | 136 | 17.87                    | 17.87                          | 1.00           | -0.02            | 0.443                  | 0.44                 |
|          | 802.11a | -    | ANT Side      | 136 | 17.87                    | 17.87                          | 1.00           | 0.01             | 1.17                   | 1.17                 |
| 04       | 802.11a | -    | ANT Side      | 108 | 17.87                    | 17.81                          | 1.01           | 0.07             | 1.19                   | 1.21                 |
|          | 802.11a | -    | ANT Side      | 116 | 17.87                    | 17.78                          | 1.02           | -0.05            | 1.13                   | 1.15                 |
|          | 802.11n | HT20 | ANT Side      | 116 | 17.93                    | 17.93                          | 1.00           | -0.04            | 1.12                   | 1.12                 |
|          | 802.11n | HT20 | ANT Side      | 108 | 17.93                    | 17.83                          | 1.02           | 0.03             | 1.17                   | 1.20                 |
|          | 802.11n | HT20 | ANT Side      | 136 | 17.93                    | 17.73                          | 1.05           | 0.03             | 1.09                   | 1.14                 |
|          | 802.11a | -    | ANT Side      | 108 | 17.87                    | 17.81                          | 1.01           | 0.06             | 1.15                   | 1.17                 |
|          | 802.11a | -    | Front Face    | 149 | 17.68                    | 17.68                          | 1.00           | -0.02            | 0.403                  | 0.40                 |
|          | 802.11a | -    | ANT Side      | 149 | 17.68                    | 17.68                          | 1.00           | 0.09             | 0.975                  | 0.98                 |
|          | 802.11a | -    | ANT Side      | 157 | 17.68                    | 17.63                          | 1.01           | -0.08            | 0.901                  | 0.91                 |
|          | 802.11a | -    | ANT Side      | 161 | 17.68                    | 17.46                          | 1.05           | -0.04            | 1.09                   | 1.15                 |
|          | 802.11n | HT20 | ANT Side      | 165 | 17.69                    | 17.69                          | 1.00           | -0.04            | 0.866                  | 0.87                 |
| 05       | 802.11n | HT20 | ANT Side      | 149 | 17.69                    | 17.62                          | 1.02           | 0.07             | 1.17                   | 1.19                 |
|          | 802.11n | HT20 | ANT Side      | 157 | 17.69                    | 17.64                          | 1.01           | -0.09            | 1.04                   | 1.05                 |
|          | 802.11n | HT20 | ANT Side      | 149 | 17.69                    | 17.62                          | 1.02           | -0.06            | 1.11                   | 1.13                 |

## Note:

- According to KDB 248227, when the extrapolated maximum peak SAR for the maximum output power channel is  $\leq 1.6$  W/kg and the 1g averaged SAR is  $\leq 0.8$  W/kg, WLAN SAR testing for other channels is not required.
- SAR testing for 802.11g is not required when its maximum power is less than 1/4 dB higher than 802.11b.

## 4.7.2 SAR Results for Limbs (Separation Distance is 0 cm Gap)

| Plot No. | Band    | Mode | Test Position | Ch. | Max. Tune-up Power (dBm) | Measured Conducted Power (dBm) | Scaling Factor | Power Drift (dB) | Measured SAR-10g (W/kg) | Scaled SAR-10g (W/kg) |
|----------|---------|------|---------------|-----|--------------------------|--------------------------------|----------------|------------------|-------------------------|-----------------------|
| 06       | 802.11b | -    | ANT Side      | 6   | 18.11                    | 18.11                          | 1.00           | 0.03             | 0.157                   | 0.16                  |
|          | 802.11n | HT20 | ANT Side      | 6   | 17.87                    | 17.87                          | 1.00           | 0.06             | 0.145                   | 0.15                  |
| 07       | 802.11a | -    | ANT Side      | 44  | 15.92                    | 15.92                          | 1.00           | 0.05             | 1.29                    | 1.29                  |
|          | 802.11n | HT20 | ANT Side      | 40  | 15.86                    | 15.86                          | 1.00           | -0.12            | 1.19                    | 1.19                  |
| 08       | 802.11a | -    | ANT Side      | 60  | 17.91                    | 17.91                          | 1.00           | -0.05            | 1.73                    | 1.73                  |
|          | 802.11a | -    | ANT Side      | 52  | 17.91                    | 17.87                          | 1.01           | -0.02            | 1.54                    | 1.55                  |
|          | 802.11n | HT20 | ANT Side      | 52  | 17.81                    | 17.81                          | 1.00           | 0.06             | 1.54                    | 1.54                  |
|          | 802.11a | -    | ANT Side      | 136 | 17.87                    | 17.87                          | 1.00           | -0.04            | 0.934                   | 0.93                  |
| 09       | 802.11n | HT20 | ANT Side      | 116 | 17.93                    | 17.93                          | 1.00           | 0.07             | 1.28                    | 1.28                  |
|          | 802.11a | -    | ANT Side      | 149 | 17.68                    | 17.68                          | 1.00           | -0.09            | 0.726                   | 0.73                  |
| 10       | 802.11n | HT20 | ANT Side      | 165 | 17.69                    | 17.69                          | 1.00           | 0.03             | 0.806                   | 0.81                  |

## Note:

- Since the 10g averaged SAR is  $\leq 2.0$  W/kg, WLAN SAR testing for other channels is not required.

## FCC SAR Test Report

### 4.7.3 SAR Measurement Variability

According to KDB 865664 D01, SAR measurement variability was assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media are required for SAR measurements in a frequency band, the variability measurement procedures should be applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. Alternatively, if the highest measured SAR for both head and body tissue-equivalent media are  $\leq 1.45$  W/kg and the ratio of these highest SAR values, i.e., largest divided by smallest value, is  $\leq 1.10$ , the highest SAR configuration for either head or body tissue-equivalent medium may be used to perform the repeated measurement. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR repeated measurement procedure:

1. When the highest measured SAR is  $< 0.80$  W/kg, repeated measurement is not required.
2. When the highest measured SAR is  $\geq 0.80$  W/kg, repeat that measurement once.
3. If the ratio of largest to smallest SAR for the original and first repeated measurements is  $> 1.20$ , or when the original or repeated measurement is  $\geq 1.45$  W/kg, perform a second repeated measurement.
4. If the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ , and the original, first or second repeated measurement is  $\geq 1.5$  W/kg, perform a third repeated measurement.

| Band    | Mode | Test Position | Ch. | Original Measured SAR-1g (W/kg) | 1st Repeated SAR-1g (W/kg) | L/S Ratio | 2nd Repeated SAR-1g (W/kg) | L/S Ratio | 3rd Repeated SAR-1g (W/kg) | L/S Ratio |
|---------|------|---------------|-----|---------------------------------|----------------------------|-----------|----------------------------|-----------|----------------------------|-----------|
| 802.11n | HT20 | ANT Side      | 44  | 1.21                            | 1.18                       | 1.03      | N/A                        | N/A       | N/A                        | N/A       |
| 802.11a | -    | ANT Side      | 60  | 1.42                            | 1.41                       | 1.01      | N/A                        | N/A       | N/A                        | N/A       |
| 802.11a | -    | ANT Side      | 108 | 1.19                            | 1.15                       | 1.03      | N/A                        | N/A       | N/A                        | N/A       |
| 802.11n | HT20 | ANT Side      | 149 | 1.17                            | 1.11                       | 1.05      | N/A                        | N/A       | N/A                        | N/A       |

Test Engineer : Willy Chang, and Ulysses Liu

**FCC SAR Test Report****5. Calibration of Test Equipment**

| Equipment                    | Manufacturer | Model   | SN         | Cal. Date     | Cal. Interval |
|------------------------------|--------------|---------|------------|---------------|---------------|
| System Validation Dipole     | SPEAG        | D2450V2 | 716        | Jul. 31, 2013 | 2 Years       |
| System Validation Dipole     | SPEAG        | D5GHzV2 | 1018       | Jul. 24, 2013 | 2 Years       |
| Dosimetric E-Field Probe     | SPEAG        | EX3DV4  | 3590       | Mar. 04, 2014 | 1 Year        |
| Dosimetric E-Field Probe     | SPEAG        | EX3DV4  | 3820       | May 15, 2014  | 1 Year        |
| Dosimetric E-Field Probe     | SPEAG        | EX3DV4  | 3971       | Mar. 31, 2014 | 1 Year        |
| Data Acquisition Electronics | SPEAG        | DAE3    | 579        | Apr. 23, 2014 | 1 Year        |
| Data Acquisition Electronics | SPEAG        | DAE4    | 861        | Apr. 23, 2014 | 1 Year        |
| Data Acquisition Electronics | SPEAG        | DAE4    | 1431       | Mar. 24, 2014 | 1 Year        |
| ENA Series Network Analyzer  | Agilent      | E5071C  | MY46214281 | Jun. 13, 2014 | 1 Year        |
| EXA Spectrum Analyzer        | Agilent      | N9010A  | MY53400225 | Sep. 18, 2013 | 1 Year        |
| MXG Analog Signal Generator  | Agilent      | N5182B  | MY53050430 | Nov. 19, 2013 | 1 Year        |
| Power Meter                  | Anritsu      | ML2495A | 1232002    | Aug. 23, 2013 | 1 Year        |
| Power Sensor                 | Anritsu      | MA2411B | 1207325    | Aug. 23, 2013 | 1 Year        |
| Thermometer                  | YFE          | YF-160A | 110600361  | Feb. 27, 2014 | 1 Year        |

## 6. Measurement Uncertainty

| Error Description                    | Uncertainty Value (±%) | Probability Distribution | Divisor | Ci (1g) | Standard Uncertainty (1g) | Vi |
|--------------------------------------|------------------------|--------------------------|---------|---------|---------------------------|----|
| <b>Measurement System</b>            |                        |                          |         |         |                           |    |
| Probe Calibration                    | 6.0                    | Normal                   | 1       | 1       | ± 6.0 %                   | ∞  |
| Axial Isotropy                       | 4.7                    | Rectangular              | √3      | 0.7     | ± 1.9 %                   | ∞  |
| Hemispherical Isotropy               | 9.6                    | Rectangular              | √3      | 0.7     | ± 3.9 %                   | ∞  |
| Boundary Effects                     | 1.0                    | Rectangular              | √3      | 1       | ± 0.6 %                   | ∞  |
| Linearity                            | 4.7                    | Rectangular              | √3      | 1       | ± 2.7 %                   | ∞  |
| System Detection Limits              | 1.0                    | Rectangular              | √3      | 1       | ± 0.6 %                   | ∞  |
| Readout Electronics                  | 0.6                    | Normal                   | 1       | 1       | ± 0.6 %                   | ∞  |
| Response Time                        | 0.0                    | Rectangular              | √3      | 1       | ± 0.0 %                   | ∞  |
| Integration Time                     | 1.7                    | Rectangular              | √3      | 1       | ± 1.0 %                   | ∞  |
| RF Ambient Noise                     | 3.0                    | Rectangular              | √3      | 1       | ± 1.7 %                   | ∞  |
| RF Ambient Reflections               | 3.0                    | Rectangular              | √3      | 1       | ± 1.7 %                   | ∞  |
| Probe Positioner                     | 0.5                    | Rectangular              | √3      | 1       | ± 0.3 %                   | ∞  |
| Probe Positioning                    | 2.9                    | Rectangular              | √3      | 1       | ± 1.7 %                   | ∞  |
| Max. SAR Eval.                       | 2.3                    | Rectangular              | √3      | 1       | ± 1.3 %                   | ∞  |
| <b>Test Sample Related</b>           |                        |                          |         |         |                           |    |
| Device Positioning                   | 3.9                    | Normal                   | 1       | 1       | ± 3.9 %                   | 31 |
| Device Holder                        | 2.7                    | Normal                   | 1       | 1       | ± 2.7 %                   | 19 |
| Power Drift                          | 5.0                    | Rectangular              | √3      | 1       | ± 2.9 %                   | ∞  |
| <b>Phantom and Setup</b>             |                        |                          |         |         |                           |    |
| Phantom Uncertainty                  | 4.0                    | Rectangular              | √3      | 1       | ± 2.3 %                   | ∞  |
| Liquid Conductivity (Target)         | 5.0                    | Rectangular              | √3      | 0.64    | ± 1.8 %                   | ∞  |
| Liquid Conductivity (Meas.)          | 5.0                    | Normal                   | 1       | 0.64    | ± 3.2 %                   | 29 |
| Liquid Permittivity (Target)         | 5.0                    | Rectangular              | √3      | 0.6     | ± 1.7 %                   | ∞  |
| Liquid Permittivity (Meas.)          | 5.0                    | Normal                   | 1       | 0.6     | ± 3.0 %                   | 29 |
| <b>Combined Standard Uncertainty</b> |                        |                          |         |         | ± 11.7 %                  |    |
| <b>Expanded Uncertainty (K=2)</b>    |                        |                          |         |         | ± 23.4 %                  |    |

Uncertainty budget for frequency range 300 MHz to 3 GHz

# FCC SAR Test Report

| Error Description                    | Uncertainty Value (±%) | Probability Distribution | Divisor | Ci (1g) | Standard Uncertainty (1g) | Vi |
|--------------------------------------|------------------------|--------------------------|---------|---------|---------------------------|----|
| <b>Measurement System</b>            |                        |                          |         |         |                           |    |
| Probe Calibration                    | 6.55                   | Normal                   | 1       | 1       | ± 6.55 %                  | ∞  |
| Axial Isotropy                       | 4.7                    | Rectangular              | √3      | 0.7     | ± 1.9 %                   | ∞  |
| Hemispherical Isotropy               | 9.6                    | Rectangular              | √3      | 0.7     | ± 3.9 %                   | ∞  |
| Boundary Effects                     | 2.0                    | Rectangular              | √3      | 1       | ± 1.2 %                   | ∞  |
| Linearity                            | 4.7                    | Rectangular              | √3      | 1       | ± 2.7 %                   | ∞  |
| System Detection Limits              | 1.0                    | Rectangular              | √3      | 1       | ± 0.6 %                   | ∞  |
| Readout Electronics                  | 0.3                    | Normal                   | 1       | 1       | ± 0.3 %                   | ∞  |
| Response Time                        | 0.8                    | Rectangular              | √3      | 1       | ± 0.5 %                   | ∞  |
| Integration Time                     | 2.6                    | Rectangular              | √3      | 1       | ± 1.5 %                   | ∞  |
| RF Ambient Noise                     | 3.0                    | Rectangular              | √3      | 1       | ± 1.7 %                   | ∞  |
| RF Ambient Reflections               | 3.0                    | Rectangular              | √3      | 1       | ± 1.7 %                   | ∞  |
| Probe Positioner                     | 0.8                    | Rectangular              | √3      | 1       | ± 0.5 %                   | ∞  |
| Probe Positioning                    | 9.9                    | Rectangular              | √3      | 1       | ± 5.7 %                   | ∞  |
| Max. SAR Eval.                       | 4.0                    | Rectangular              | √3      | 1       | ± 2.3 %                   | ∞  |
| <b>Test Sample Related</b>           |                        |                          |         |         |                           |    |
| Device Positioning                   | 3.9                    | Normal                   | 1       | 1       | ± 3.9 %                   | 31 |
| Device Holder                        | 2.7                    | Normal                   | 1       | 1       | ± 2.7 %                   | 19 |
| Power Drift                          | 5.0                    | Rectangular              | √3      | 1       | ± 2.9 %                   | ∞  |
| <b>Phantom and Setup</b>             |                        |                          |         |         |                           |    |
| Phantom Uncertainty                  | 4.0                    | Rectangular              | √3      | 1       | ± 2.3 %                   | ∞  |
| Liquid Conductivity (Target)         | 5.0                    | Rectangular              | √3      | 0.64    | ± 1.8 %                   | ∞  |
| Liquid Conductivity (Meas.)          | 5.0                    | Normal                   | 1       | 0.64    | ± 3.2 %                   | 30 |
| Liquid Permittivity (Target)         | 5.0                    | Rectangular              | √3      | 0.6     | ± 1.7 %                   | ∞  |
| Liquid Permittivity (Meas.)          | 5.0                    | Normal                   | 1       | 0.6     | ± 3.0 %                   | 30 |
| <b>Combined Standard Uncertainty</b> |                        |                          |         |         | ± 13.4 %                  |    |
| <b>Expanded Uncertainty (K=2)</b>    |                        |                          |         |         | ± 26.8 %                  |    |

Uncertainty budget for frequency range 3 GHz to 6 GHz

## FCC SAR Test Report

### 7. Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Taiwan HwaYa EMC/RF/Safety/Telecom Lab:**

Add: No. 19, Hwa Ya 2nd Rd, Wen Hwa Vil., Kwei Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

Tel: 886-3-318-3232

Fax: 886-3-327-0892

**Taiwan LinKo EMC/RF Lab:**

Add: No. 47, 14th Ling, Chia Pau Vil., Linkou Dist., New Taipei City 244, Taiwan, R.O.C.

Tel: 886-2-2605-2180

Fax: 886-2-2605-1924

**Taiwan HsinChu EMC/RF Lab:**

Add: No. 81-1, Lu Liao Keng, 9<sup>th</sup> Ling, Wu Lung Vil., Chiung Lin Township, Hsinchu County 307, Taiwan, R.O.C.

Tel: 886-3-593-5343

Fax: 886-3-593-5342

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.adt.com.tw](http://www.adt.com.tw)

The road map of all our labs can be found in our web site also.

---END---



### Appendix A. SAR Plots of System Verification

The plots for system verification with largest deviation for each SAR system combination are shown as follows.

**System Check\_B2450\_140629****DUT: Dipole 2450 MHz; Type: D2450V2; SN: 716**

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: B24T25N2\_0629 Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.989$  S/m;  $\epsilon_r = 51.463$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 21.9°C; Liquid Temperature : 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(7.72, 7.72, 7.72); Calibrated: 2014/03/04;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2014/04/23
- Phantom: SAM Phantom\_Front; Type: SAM V4.0; Serial: TP 1485
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=250mW/Area Scan (81x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 20.5 W/kg


**Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 102.2 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 28.5 W/kg

**SAR(1 g) = 13.2 W/kg; SAR(10 g) = 6.03 W/kg**

Maximum value of SAR (measured) = 20.7 W/kg

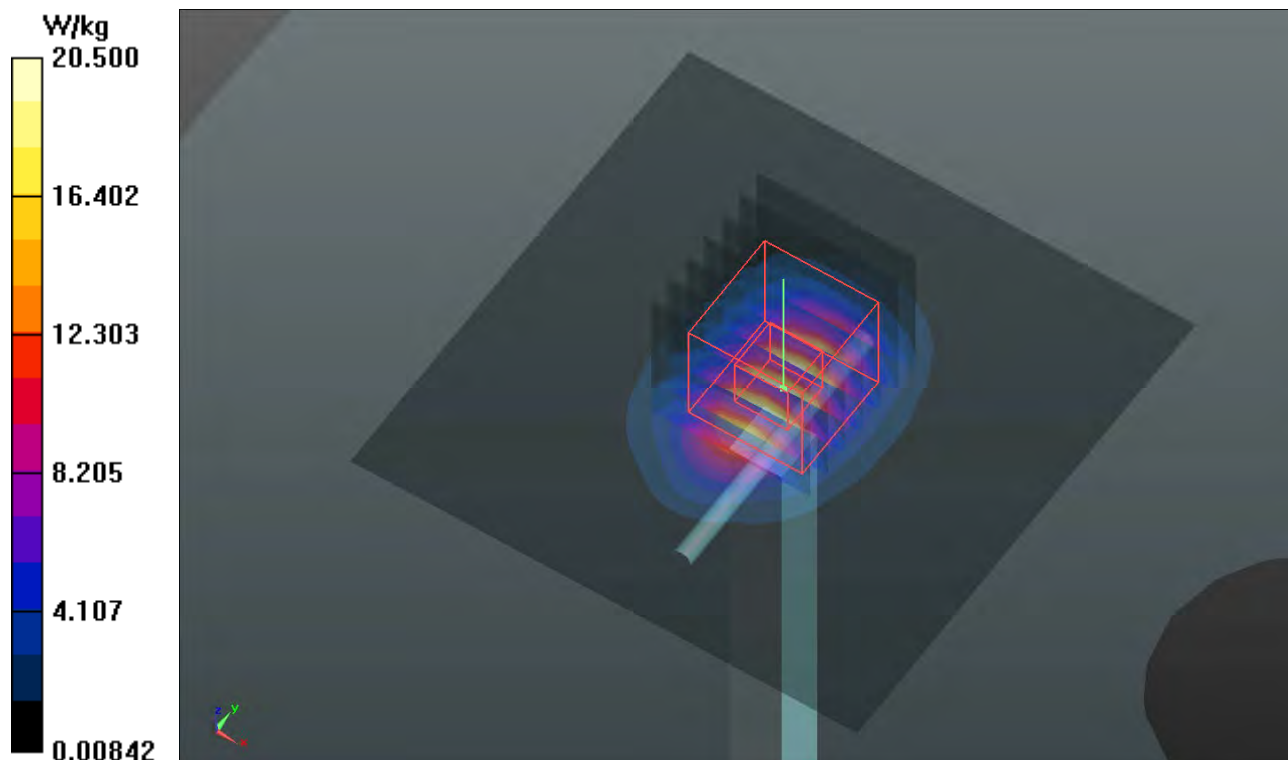

## System Check\_B5200\_140628

**DUT: Dipole 5 GHz; Type: D5GHzV2; SN: 1018**

Communication System: CW; Frequency: 5200 MHz; Duty Cycle: 1:1

Medium: B50T60N1\_0628 Medium parameters used:  $f = 5200$  MHz;  $\sigma = 5.399$  S/m;  $\epsilon_r = 47.771$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 21.9 °C; Liquid Temperature : 21.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3971; ConvF(4.59, 4.59, 4.59); Calibrated: 2014/03/31;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2014/04/23
- Phantom: SAM Phantom\_Front; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=100mW/Area Scan (91x91x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 16.2 W/kg


**Pin=100mW/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 58.06 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 30.1 W/kg

**SAR(1 g) = 7.8 W/kg; SAR(10 g) = 2.22 W/kg**

Maximum value of SAR (measured) = 16.3 W/kg

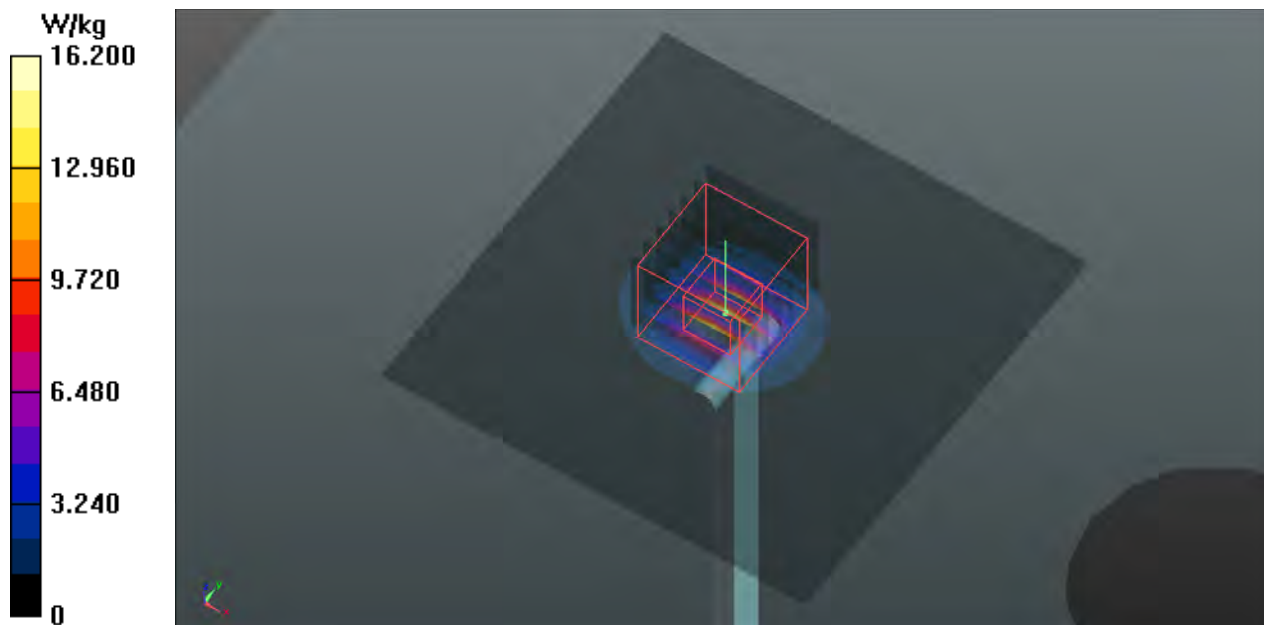

## System Check\_B5300\_140628

**DUT: Dipole 5 GHz; Type: D5GHzV2; SN: 1018**

Communication System: CW; Frequency: 5300 MHz; Duty Cycle: 1:1

Medium: B50T60N1\_0628 Medium parameters used:  $f = 5300$  MHz;  $\sigma = 5.542$  S/m;  $\epsilon_r = 47.565$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 21.9 °C; Liquid Temperature : 21.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3971; ConvF(4.19, 4.19, 4.19); Calibrated: 2014/03/31;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2014/04/23
- Phantom: SAM Phantom\_Front; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=100mW/Area Scan (91x91x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 16.4 W/kg


**Pin=100mW/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 58.89 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 30.8 W/kg

**SAR(1 g) = 7.76 W/kg; SAR(10 g) = 2.21 W/kg**

Maximum value of SAR (measured) = 16.0 W/kg

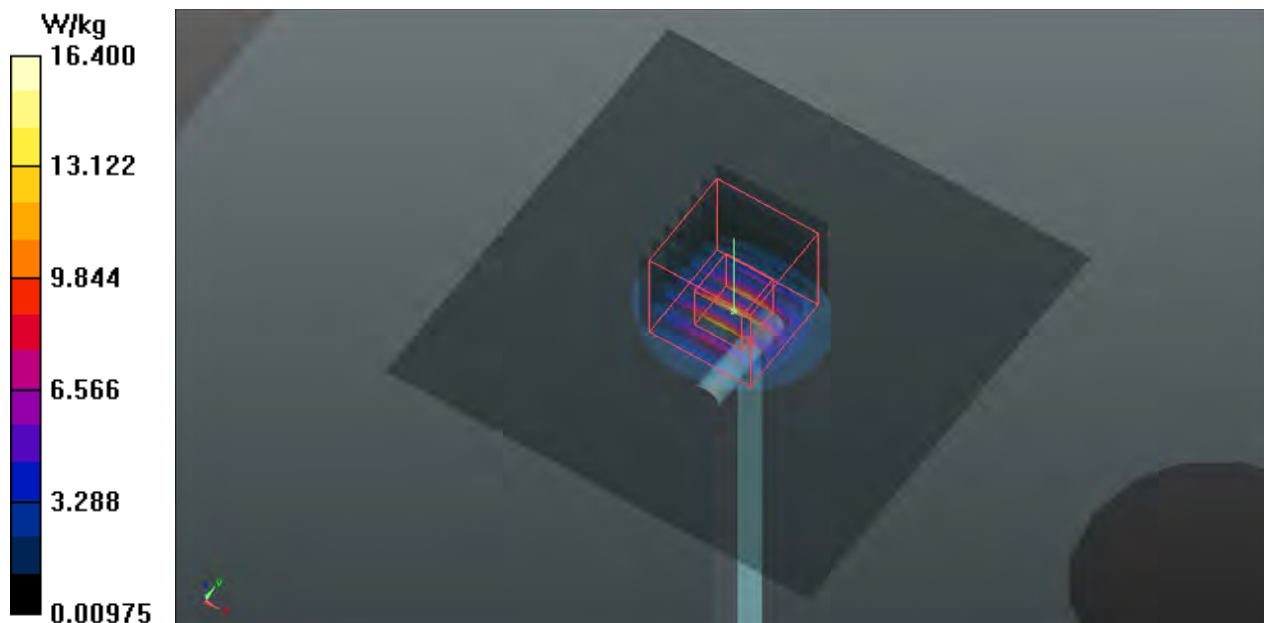

## System Check\_B5600\_140628

**DUT: Dipole 5 GHz; Type: D5GHzV2; SN: 1018**

Communication System: CW; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium: B50T60N1\_0628 Medium parameters used:  $f = 5600$  MHz;  $\sigma = 5.96$  S/m;  $\epsilon_r = 46.959$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 21.9 °C; Liquid Temperature : 21.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3971; ConvF(3.87, 3.87, 3.87); Calibrated: 2014/03/31;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2014/04/23
- Phantom: SAM Phantom\_Front; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=100mW/Area Scan (91x91x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 16.4 W/kg


**Pin=100mW/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 59.94 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 30.7 W/kg

**SAR(1 g) = 7.95 W/kg; SAR(10 g) = 2.26 W/kg**

Maximum value of SAR (measured) = 16.6 W/kg

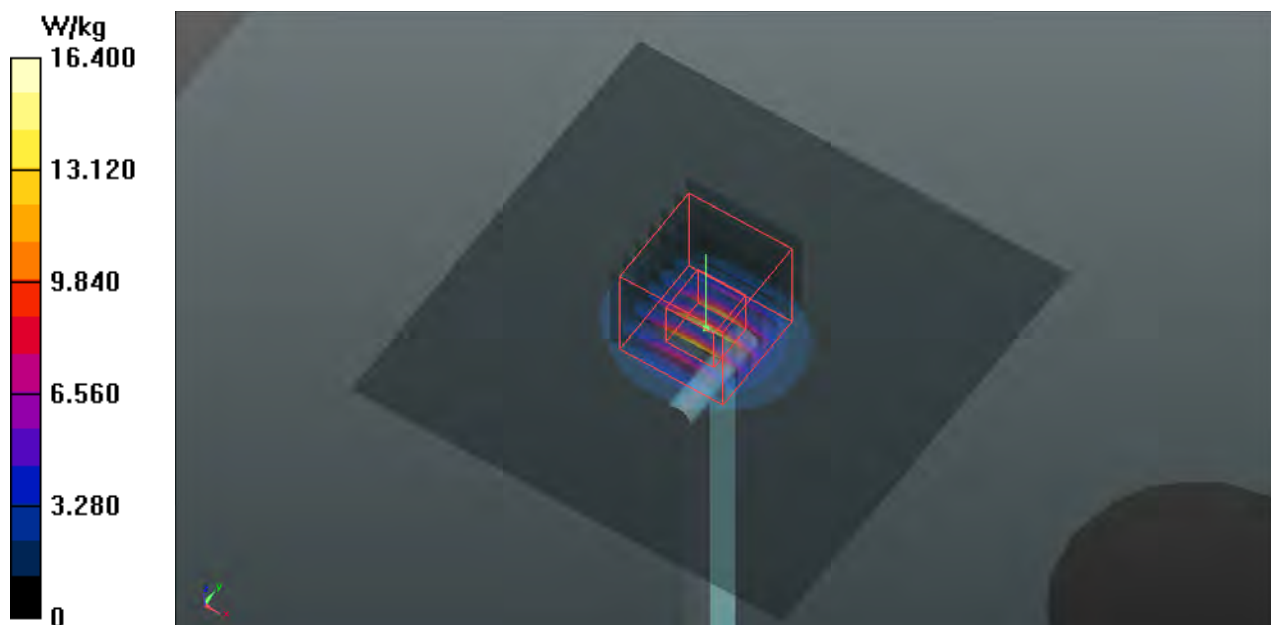

## System Check\_B5800\_140628

**DUT: Dipole 5 GHz; Type: D5GHzV2; SN: 1018**

Communication System: CW; Frequency: 5800 MHz; Duty Cycle: 1:1

Medium: B50T60N1\_0628 Medium parameters used:  $f = 5800$  MHz;  $\sigma = 6.237$  S/m;  $\epsilon_r = 46.574$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 21.9 °C; Liquid Temperature : 21.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3971; ConvF(4.12, 4.12, 4.12); Calibrated: 2014/03/31;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2014/04/23
- Phantom: SAM Phantom\_Front; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=100mW/Area Scan (91x91x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 29.8 W/kg


**Pin=100mW/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 78.24 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 34.6 W/kg

**SAR(1 g) = 7.91 W/kg; SAR(10 g) = 2.23 W/kg**

Maximum value of SAR (measured) = 16.9 W/kg

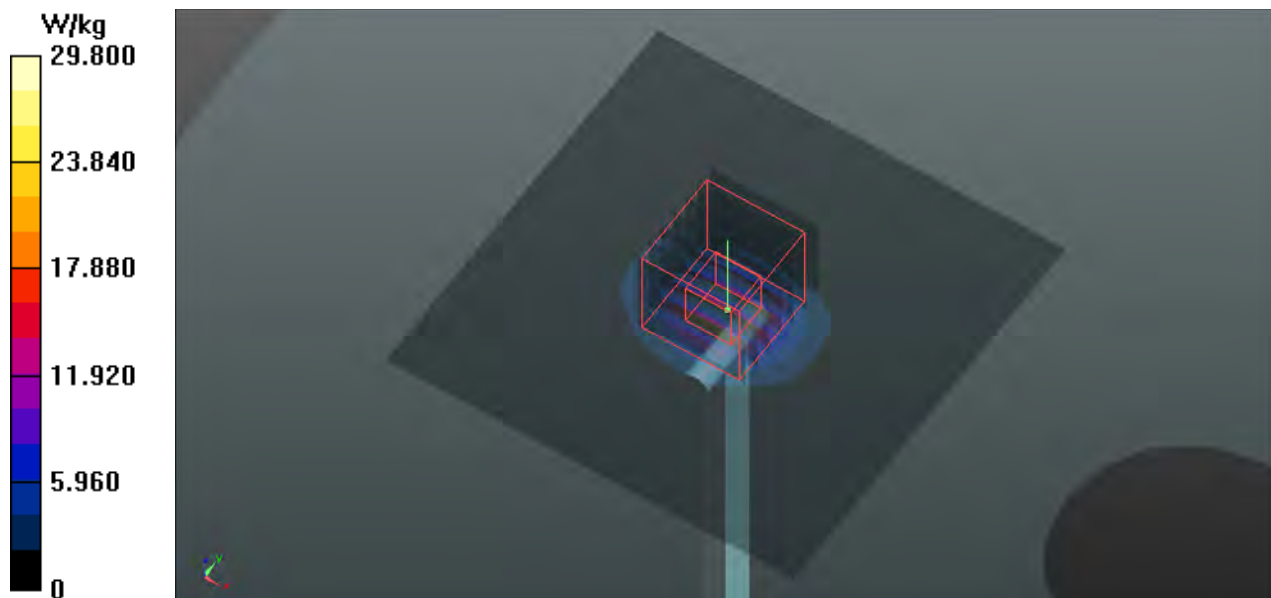

**System Check\_B2450\_140629****DUT: Dipole 2450 MHz; Type: D2450V2; SN: 716**

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: B24T25N2\_0629 Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.989$  S/m;  $\epsilon_r = 51.463$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 21.9°C; Liquid Temperature : 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(7.72, 7.72, 7.72); Calibrated: 2014/03/04;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2014/04/23
- Phantom: SAM Phantom\_Front; Type: SAM V4.0; Serial: TP 1485
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=250mW/Area Scan (81x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 20.5 W/kg


**Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 102.2 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 28.5 W/kg

**SAR(1 g) = 13.2 W/kg; SAR(10 g) = 6.03 W/kg**

Maximum value of SAR (measured) = 20.7 W/kg

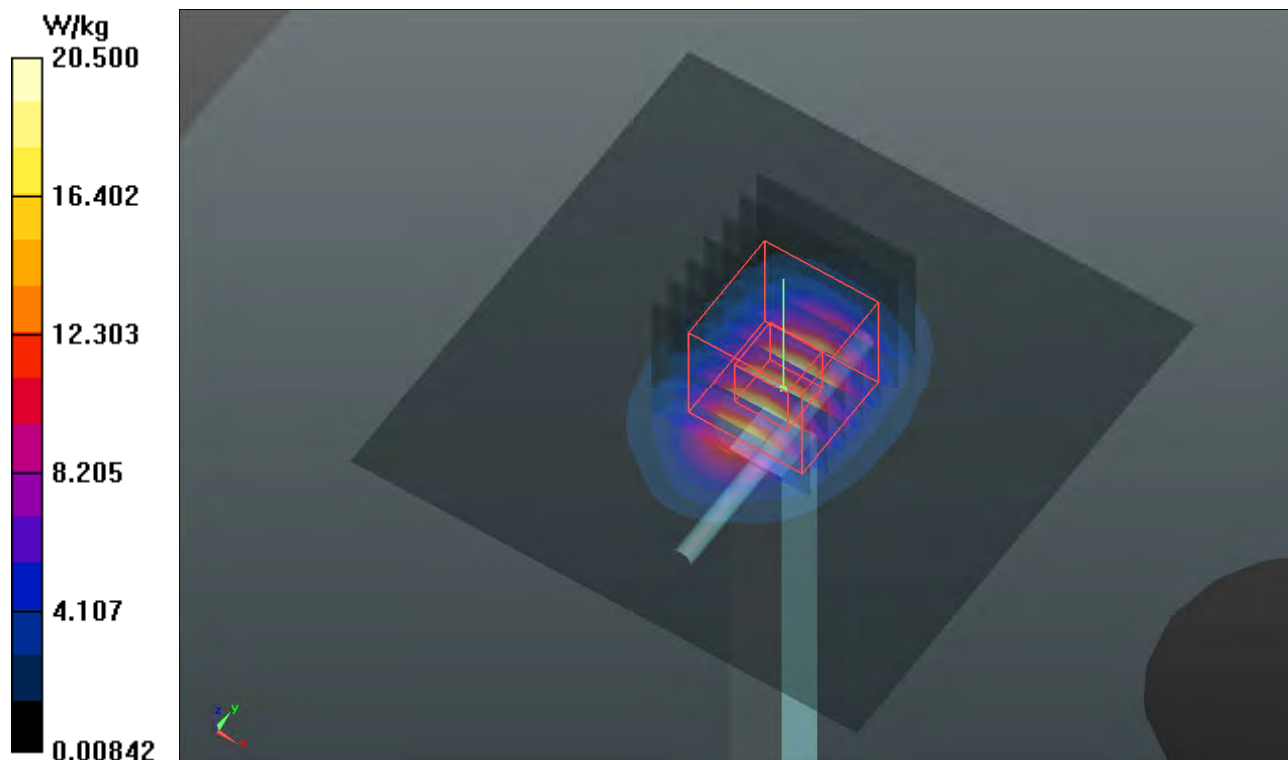

## System Check\_B5200\_140628

**DUT: Dipole 5 GHz; Type: D5GHzV2; SN: 1018**

Communication System: CW; Frequency: 5200 MHz; Duty Cycle: 1:1

Medium: B50T60N1\_0628 Medium parameters used:  $f = 5200$  MHz;  $\sigma = 5.399$  S/m;  $\epsilon_r = 47.771$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 21.2 °C; Liquid Temperature : 20.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3820; ConvF(4.44, 4.44, 4.44); Calibrated: 2014/05/15;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1431; Calibrated: 2014/03/24
- Phantom: SAM Phantom\_Left; Type: SAM V4.0; Serial: TP 1653
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=100mW/Area Scan (91x91x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 15.3 W/kg


**Pin=100mW/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 56.11 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 29.2 W/kg

**SAR(1 g) = 7.17 W/kg; SAR(10 g) = 2.04 W/kg**

Maximum value of SAR (measured) = 14.7 W/kg

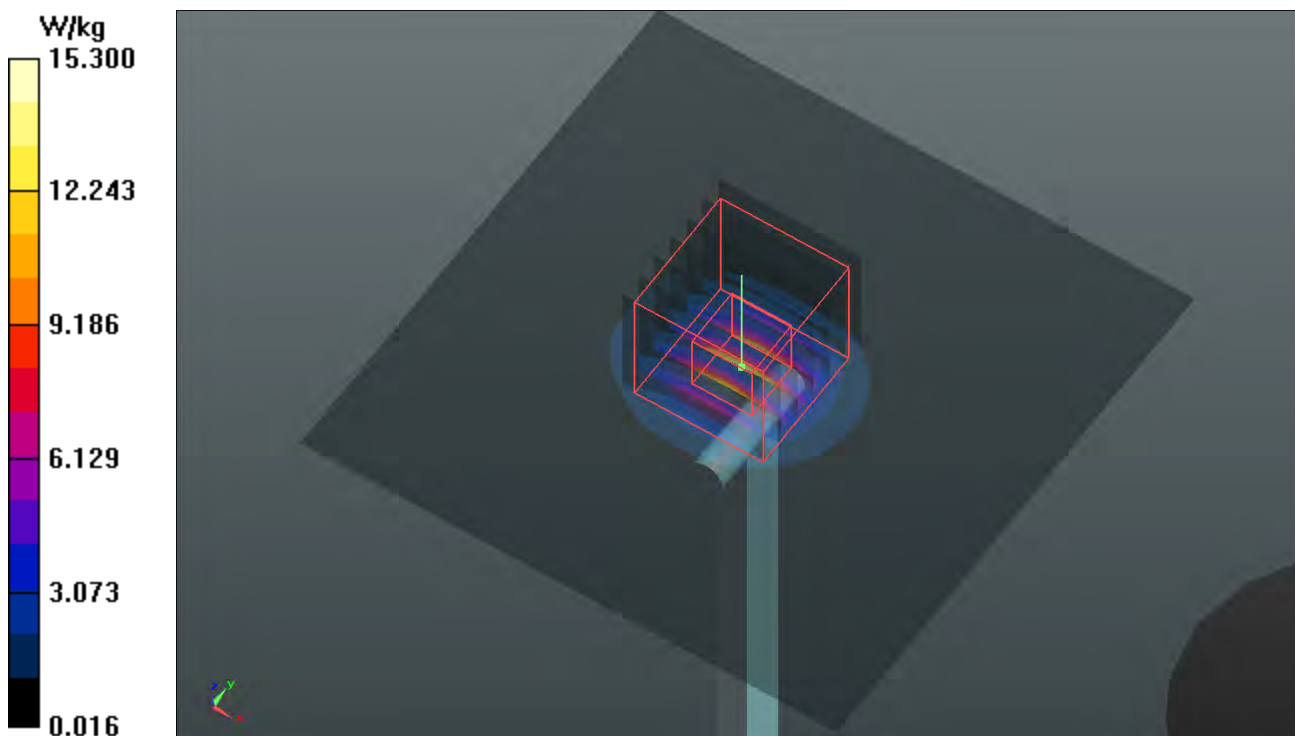

## System Check\_B5300\_140628

**DUT: Dipole 5 GHz; Type: D5GHzV2; SN: 1018**

Communication System: CW; Frequency: 5300 MHz; Duty Cycle: 1:1

Medium: B50T60N1\_0628 Medium parameters used:  $f = 5300$  MHz;  $\sigma = 5.542$  S/m;  $\epsilon_r = 47.565$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 21.2 °C ; Liquid Temperature : 20.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3820; ConvF(4.25, 4.25, 4.25); Calibrated: 2014/05/15;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1431; Calibrated: 2014/03/24
- Phantom: SAM Phantom\_Left; Type: SAM V4.0; Serial: TP 1653
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=100mW/Area Scan (91x91x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 15.8 W/kg


**Pin=100mW/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 57.24 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 30.5 W/kg

**SAR(1 g) = 7.46 W/kg; SAR(10 g) = 2.12 W/kg**

Maximum value of SAR (measured) = 15.5 W/kg

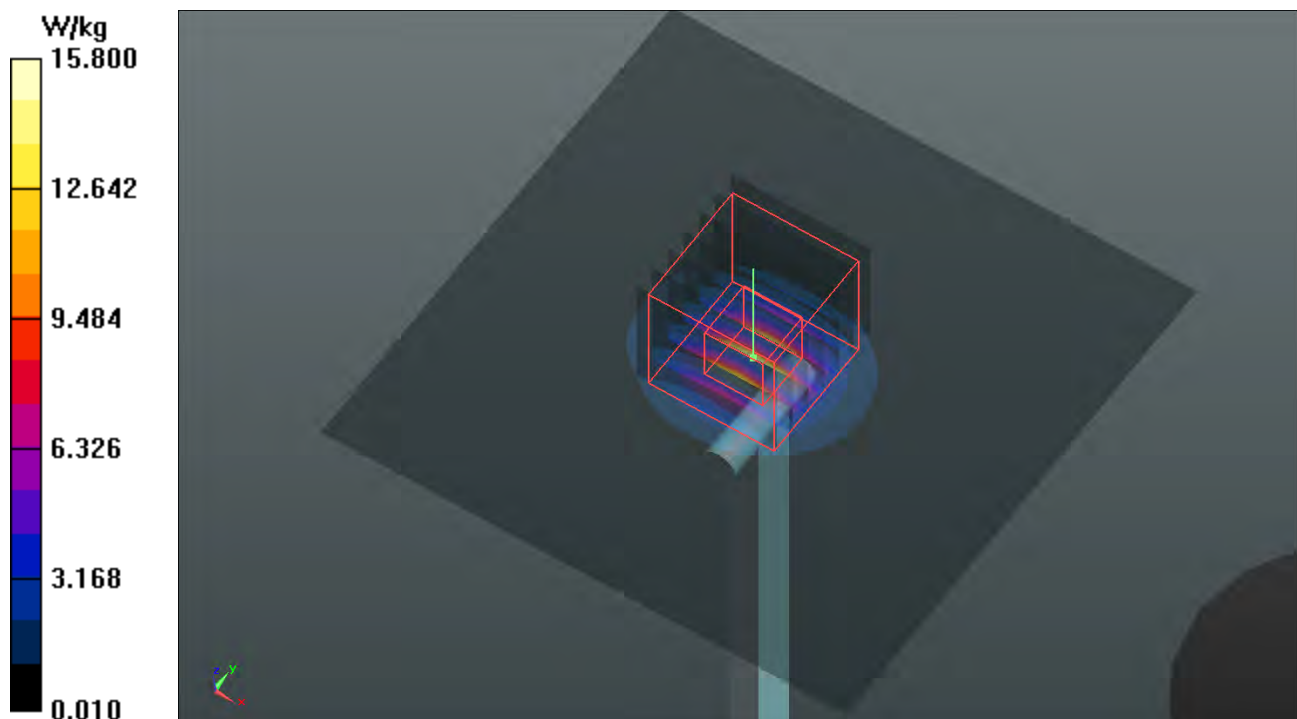

## System Check\_B5600\_140628

**DUT: Dipole 5 GHz; Type: D5GHzV2; SN: 1018**

Communication System: CW; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium: B50T60N1\_0628 Medium parameters used:  $f = 5600$  MHz;  $\sigma = 5.96$  S/m;  $\epsilon_r = 46.959$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 21.2 °C ; Liquid Temperature : 20.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3820; ConvF(3.83, 3.83, 3.83); Calibrated: 2014/05/15;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1431; Calibrated: 2014/03/24
- Phantom: SAM Phantom\_Left; Type: SAM V4.0; Serial: TP 1653
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=100mW/Area Scan (91x91x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 15.6 W/kg


**Pin=100mW/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 55.90 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 32.6 W/kg

**SAR(1 g) = 7.79 W/kg; SAR(10 g) = 2.21 W/kg**

Maximum value of SAR (measured) = 16.5 W/kg

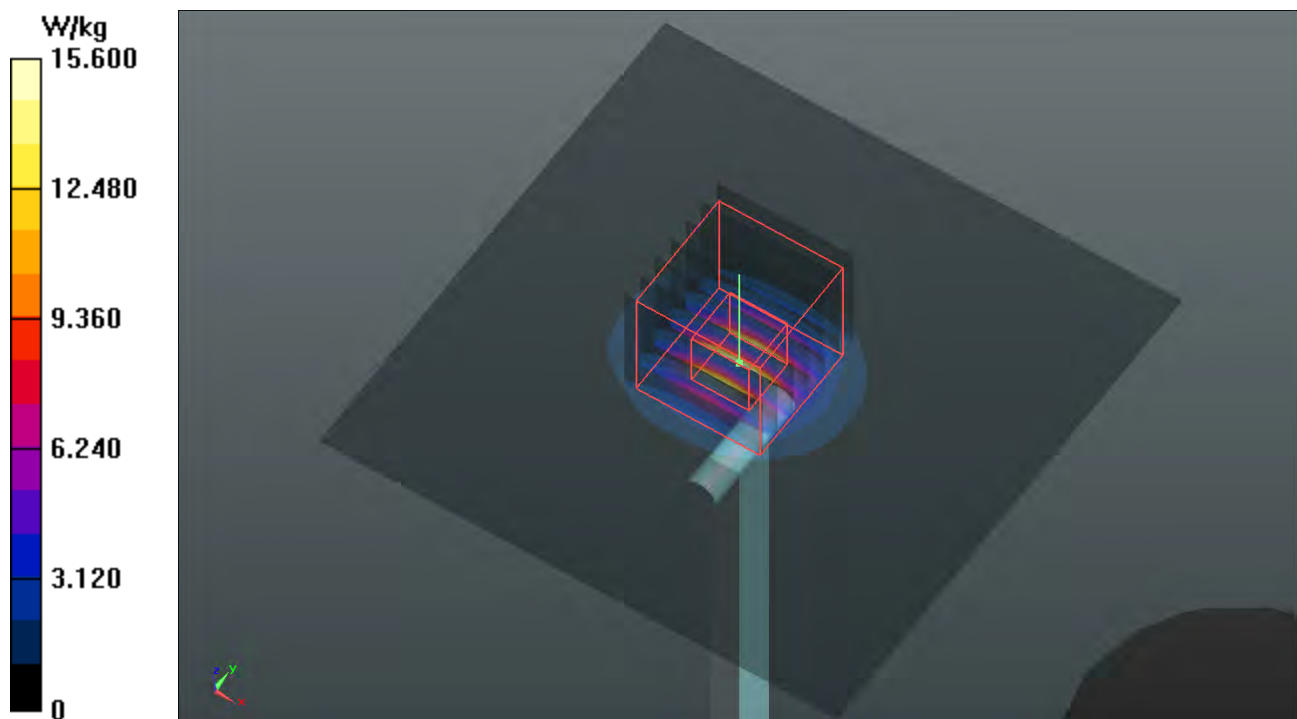

## System Check\_B5800\_140628

**DUT: Dipole 5 GHz; Type: D5GHzV2; SN: 1018**

Communication System: CW; Frequency: 5800 MHz; Duty Cycle: 1:1

Medium: B50T60N1\_0628 Medium parameters used:  $f = 5800$  MHz;  $\sigma = 6.237$  S/m;  $\epsilon_r = 46.574$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 21.2 °C; Liquid Temperature : 20.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3820; ConvF(4, 4, 4); Calibrated: 2014/05/15;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1431; Calibrated: 2014/03/24
- Phantom: SAM Phantom\_Left; Type: SAM V4.0; Serial: TP 1653
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=100mW/Area Scan (91x91x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 14.9 W/kg


**Pin=100mW/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 53.48 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 30.5 W/kg

**SAR(1 g) = 7.02 W/kg; SAR(10 g) = 2 W/kg**

Maximum value of SAR (measured) = 15.0 W/kg

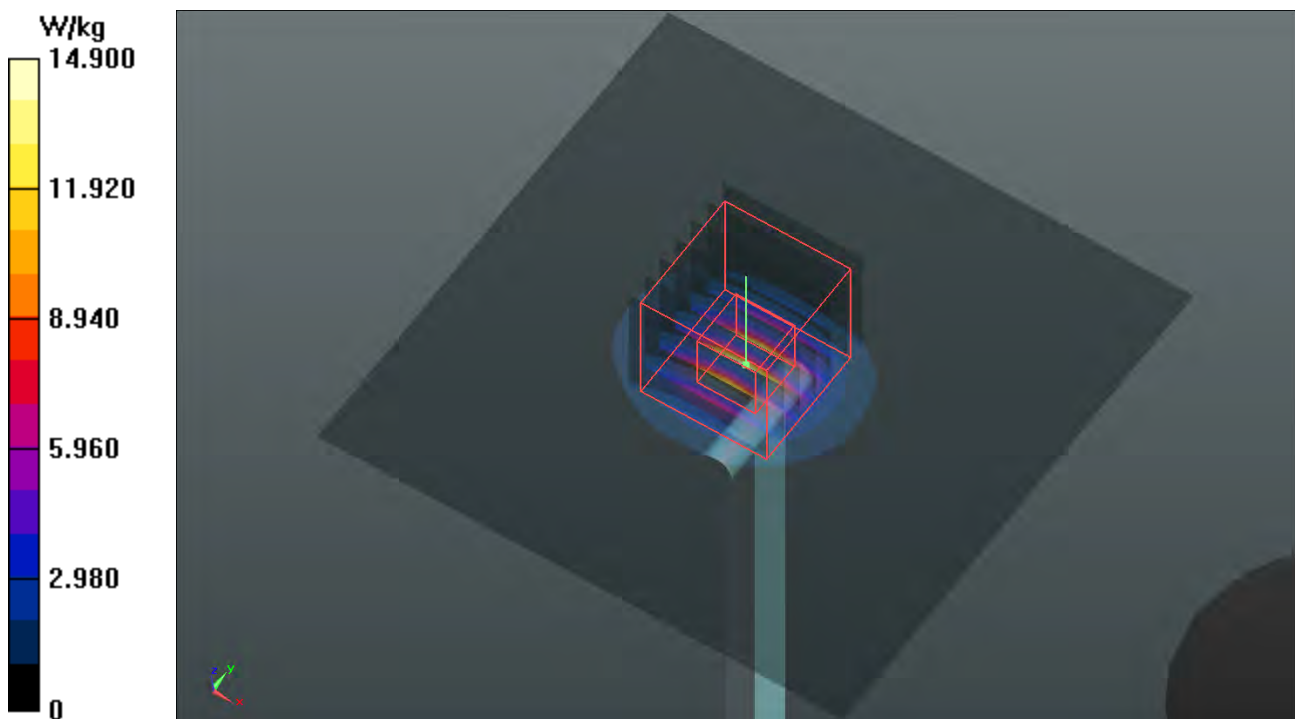



## **Appendix B. SAR Plots of SAR Measurement**

The SAR plots for highest measured SAR in each exposure configuration, wireless mode and frequency band combination, and measured SAR > 1.5 W/kg are shown as follows.

**P01 802.11b\_Body-ANT Side\_1cm\_Ch6****DUT: 140609E04**

Communication System: WLAN\_2.4G; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: B24T25N2\_0629 Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.968$  S/m;  $\epsilon_r = 51.462$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 21.9°C; Liquid Temperature : 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(7.72, 7.72, 7.72); Calibrated: 2014/03/04;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2014/04/23
- Phantom: SAM Phantom\_Front; Type: SAM V4.0; Serial: TP 1485
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**- Area Scan (41x131x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.141 W/kg

**- Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.574 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.183 W/kg

**SAR(1 g) = 0.096 W/kg; SAR(10 g) = 0.051 W/kg**

Maximum value of SAR (measured) = 0.138 W/kg


**- Zoom Scan (5x5x7)/Cube 1:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.574 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.137 W/kg

**SAR(1 g) = 0.076 W/kg; SAR(10 g) = 0.042 W/kg**

Maximum value of SAR (measured) = 0.106 W/kg

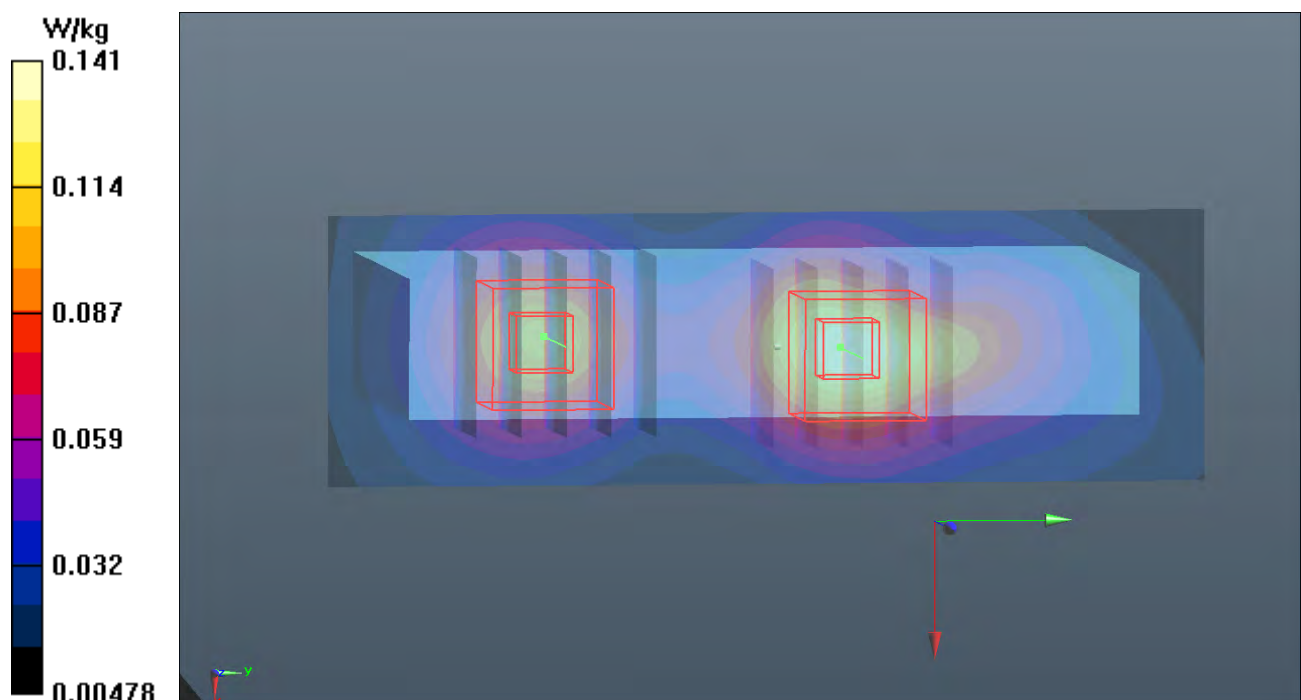

**P02 802.11n\_HT20\_Body-ANT Side\_1cm\_Ch44****DUT: 140609E04**

Communication System: WLAN\_5G; Frequency: 5220 MHz; Duty Cycle: 1:1.09

Medium: B50T60N1\_0628 Medium parameters used:  $f = 5220$  MHz;  $\sigma = 5.427$  S/m;  $\epsilon_r = 47.715$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 21.9 °C; Liquid Temperature : 21.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3971; ConvF(4.59, 4.59, 4.59); Calibrated: 2014/03/31;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2014/04/23
- Phantom: SAM Phantom\_Front; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**- Area Scan (41x161x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 2.32 W/kg


**- Zoom Scan (6x6x12)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 3.150 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 4.45 W/kg

**SAR(1 g) = 1.21 W/kg; SAR(10 g) = 0.402 W/kg**

Maximum value of SAR (measured) = 2.08 W/kg

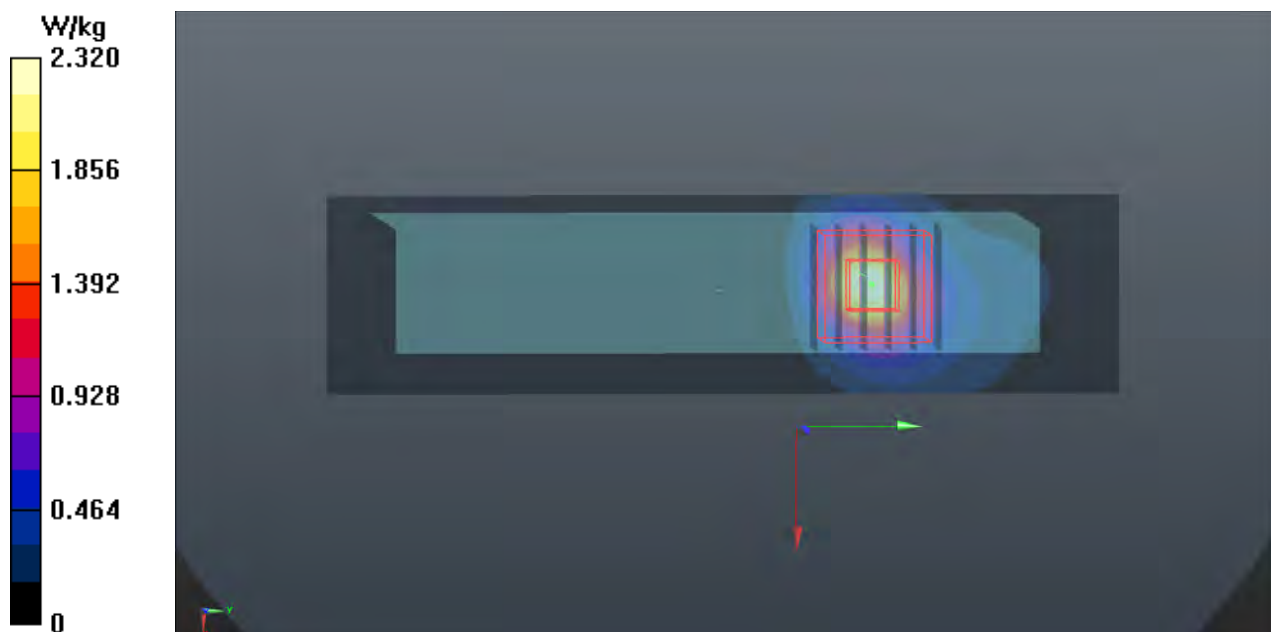

**P03 802.11a\_Body-ANT Side\_1cm\_Ch60****DUT: 140609E04**

Communication System: WLAN\_5G; Frequency: 5300 MHz; Duty Cycle: 1:1.07

Medium: B50T60N1\_0628 Medium parameters used:  $f = 5300$  MHz;  $\sigma = 5.542$  S/m;  $\epsilon_r = 47.565$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 21.9 °C; Liquid Temperature : 21.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3971; ConvF(4.19, 4.19, 4.19); Calibrated: 2014/03/31;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2014/04/23
- Phantom: SAM Phantom\_Front; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**- Area Scan (41x161x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 2.91 W/kg


**- Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.422 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 4.95 W/kg

**SAR(1 g) = 1.42 W/kg; SAR(10 g) = 0.512 W/kg**

Maximum value of SAR (measured) = 2.63 W/kg

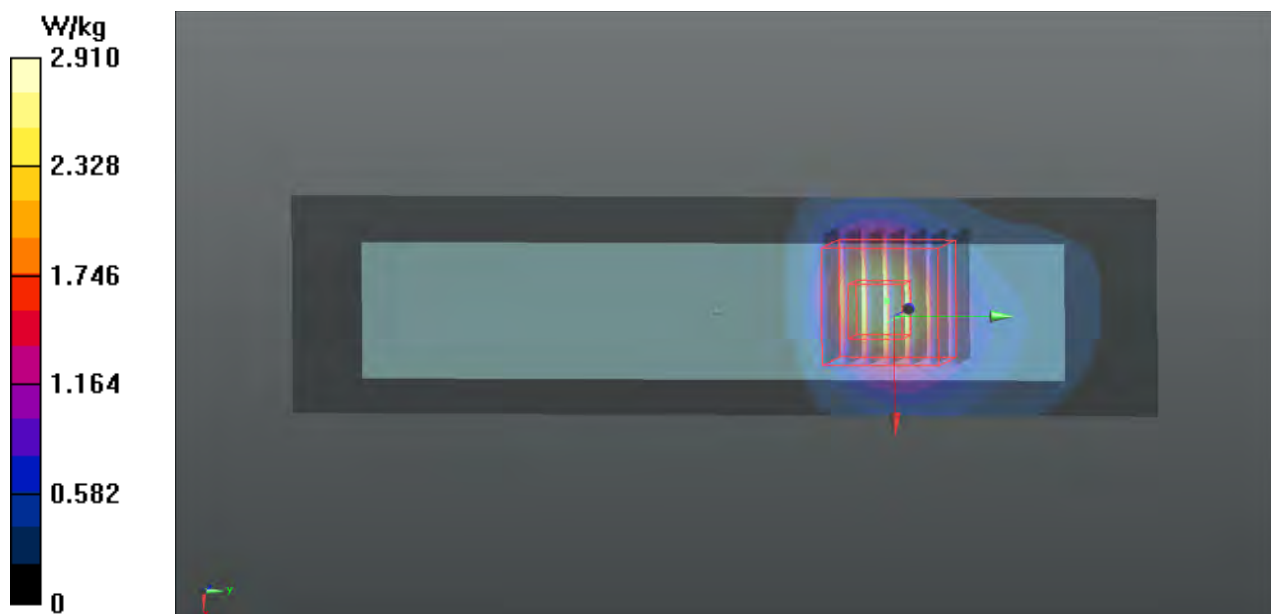

**P04 802.11a\_Body-ANT Side\_1cm\_Ch108****DUT: 140609E04**

Communication System: WLAN\_5G; Frequency: 5540 MHz; Duty Cycle: 1:1.06

Medium: B50T60N1\_0628 Medium parameters used:  $f = 5540$  MHz;  $\sigma = 5.869$  S/m;  $\epsilon_r = 47.078$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 21.9 °C; Liquid Temperature : 21.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3971; ConvF(3.87, 3.87, 3.87); Calibrated: 2014/03/31;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2014/04/23
- Phantom: SAM Phantom\_Front; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**- Area Scan (41x161x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 2.29 W/kg


**- Zoom Scan (6x6x12)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 2.647 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 4.31 W/kg

**SAR(1 g) = 1.19 W/kg; SAR(10 g) = 0.421 W/kg**

Maximum value of SAR (measured) = 2.20 W/kg

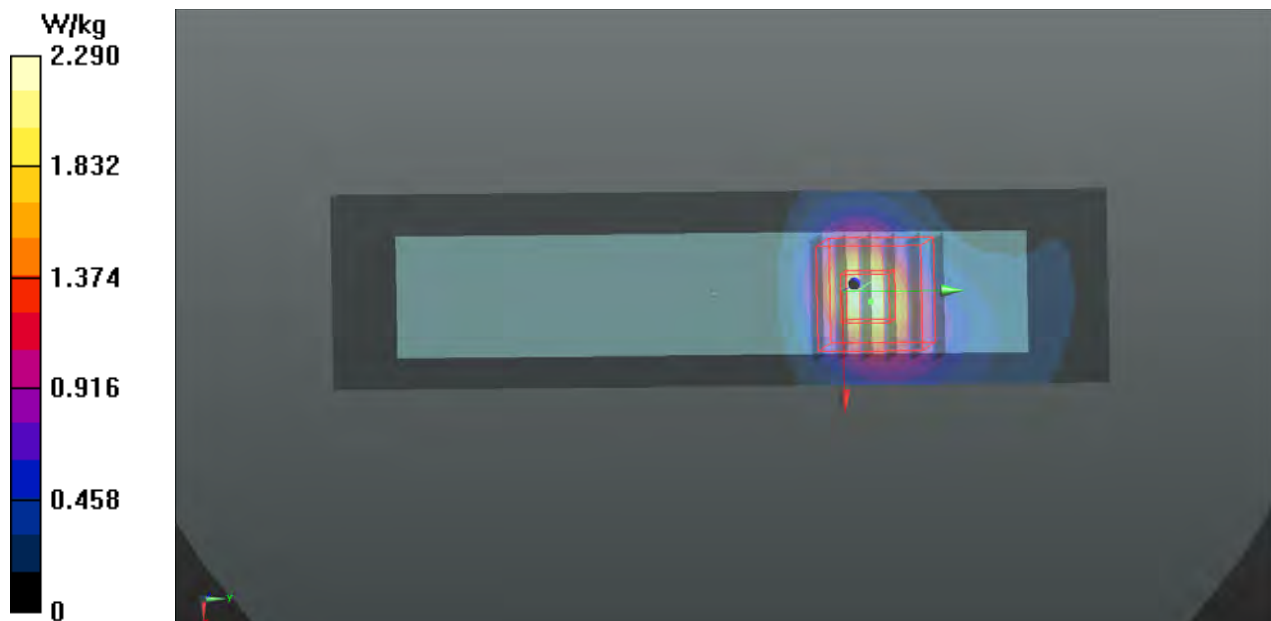

**P05 802.11n\_HT20\_Body-ANT Side\_1cm\_Ch149****DUT: 140609E04**

Communication System: WLAN\_5G; Frequency: 5745 MHz; Duty Cycle: 1:1.08

Medium: B50T60N1\_0628 Medium parameters used:  $f = 5745$  MHz;  $\sigma = 6.167$  S/m;  $\epsilon_r = 46.701$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 21.9 °C; Liquid Temperature : 21.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3971; ConvF(4.12, 4.12, 4.12); Calibrated: 2014/03/31;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2014/04/23
- Phantom: SAM Phantom\_Front; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**- Area Scan (41x161x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 2.30 W/kg


**- Zoom Scan (6x6x12)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 4.096 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 4.56 W/kg

**SAR(1 g) = 1.17 W/kg; SAR(10 g) = 0.390 W/kg**

Maximum value of SAR (measured) = 2.21 W/kg

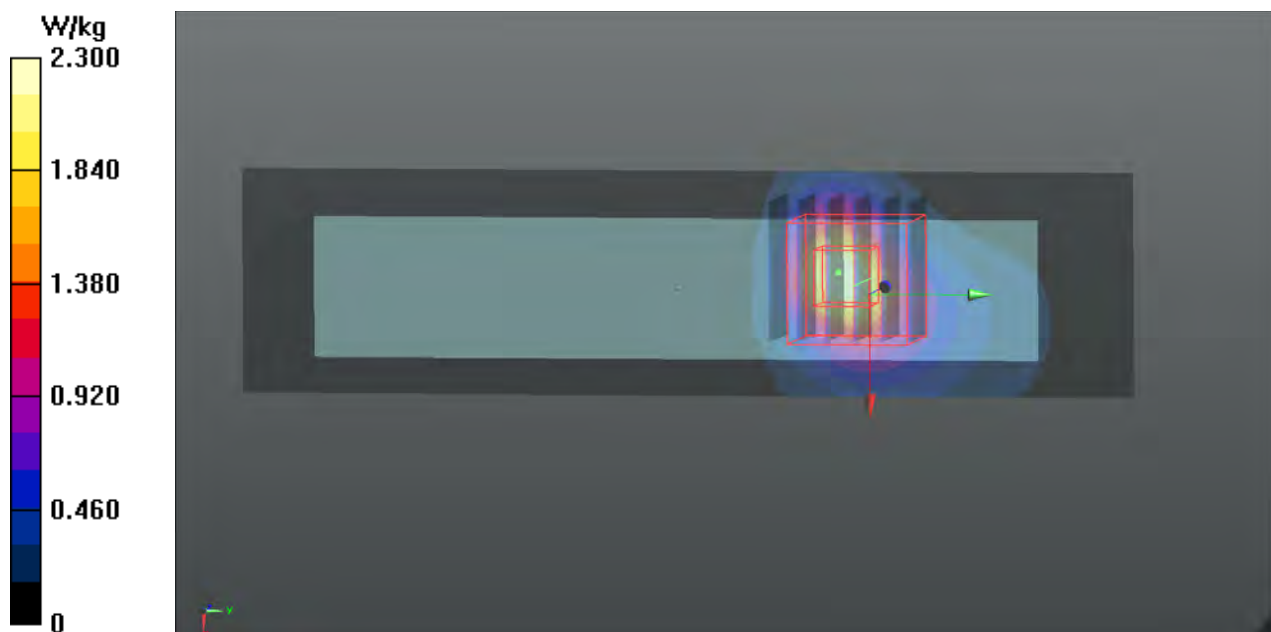

**P06 802.11b\_Limbs-ANT Side\_0cm\_Ch6****DUT: 140609E04**

Communication System: WLAN\_2.4G; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: B24T25N2\_0629 Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.968$  S/m;  $\epsilon_r = 51.462$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 21.9°C; Liquid Temperature : 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(7.72, 7.72, 7.72); Calibrated: 2014/03/04;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2014/04/23
- Phantom: SAM Phantom\_Front; Type: SAM V4.0; Serial: TP 1485
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**- Area Scan (41x131x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.806 W/kg


**- Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.24 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.973 W/kg

**SAR(1 g) = 0.399 W/kg; SAR(10 g) = 0.157 W/kg**

Maximum value of SAR (measured) = 0.802 W/kg

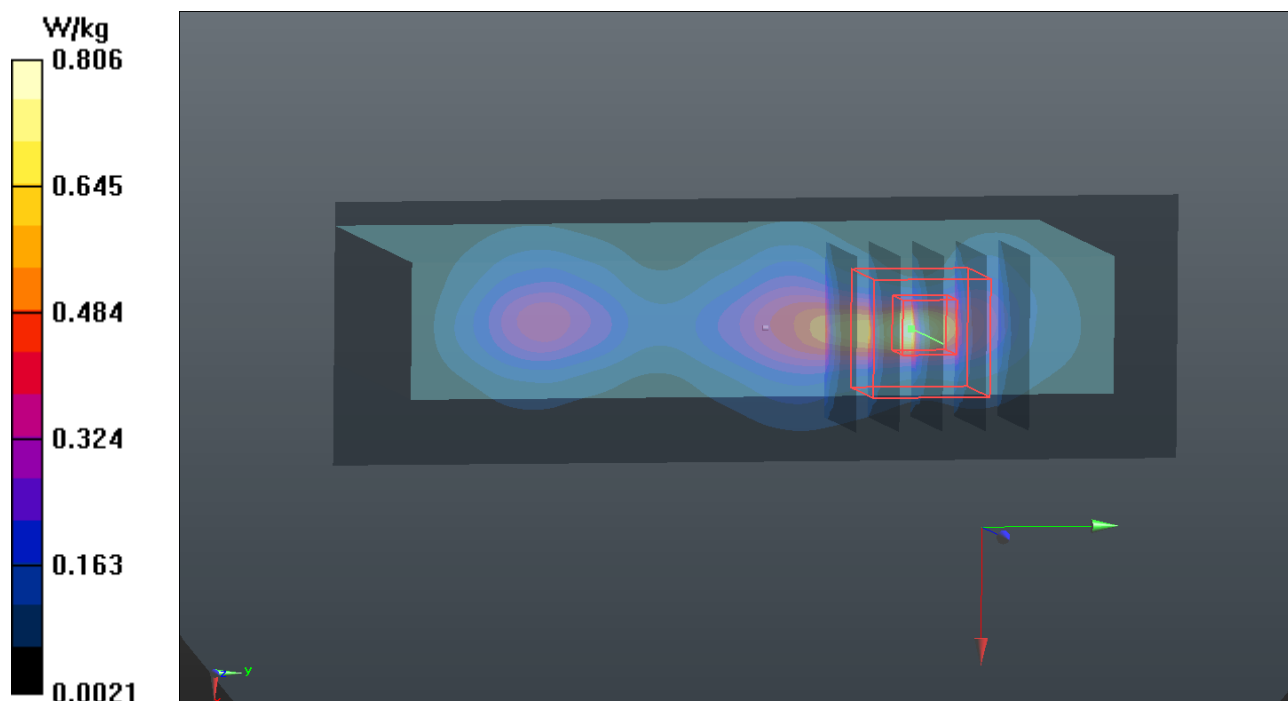

**P07 802.11a\_Limbs-ANT Side\_0cm\_Ch44****DUT: 140609E04**

Communication System: WLAN\_5G; Frequency: 5220 MHz; Duty Cycle: 1:1.06

Medium: B50T60N1\_0628 Medium parameters used:  $f = 5220$  MHz;  $\sigma = 5.427$  S/m;  $\epsilon_r = 47.715$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 21.2 °C; Liquid Temperature : 20.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3820; ConvF(4.44, 4.44, 4.44); Calibrated: 2014/05/15;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1431; Calibrated: 2014/03/24
- Phantom: SAM Phantom\_Left; Type: SAM V4.0; Serial: TP 1653
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**- Area Scan (41x161x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 17.5 W/kg


**- Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 9.448 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 38.4 W/kg

**SAR(1 g) = 6.3 W/kg; SAR(10 g) = 1.29 W/kg**

Maximum value of SAR (measured) = 15.1 W/kg

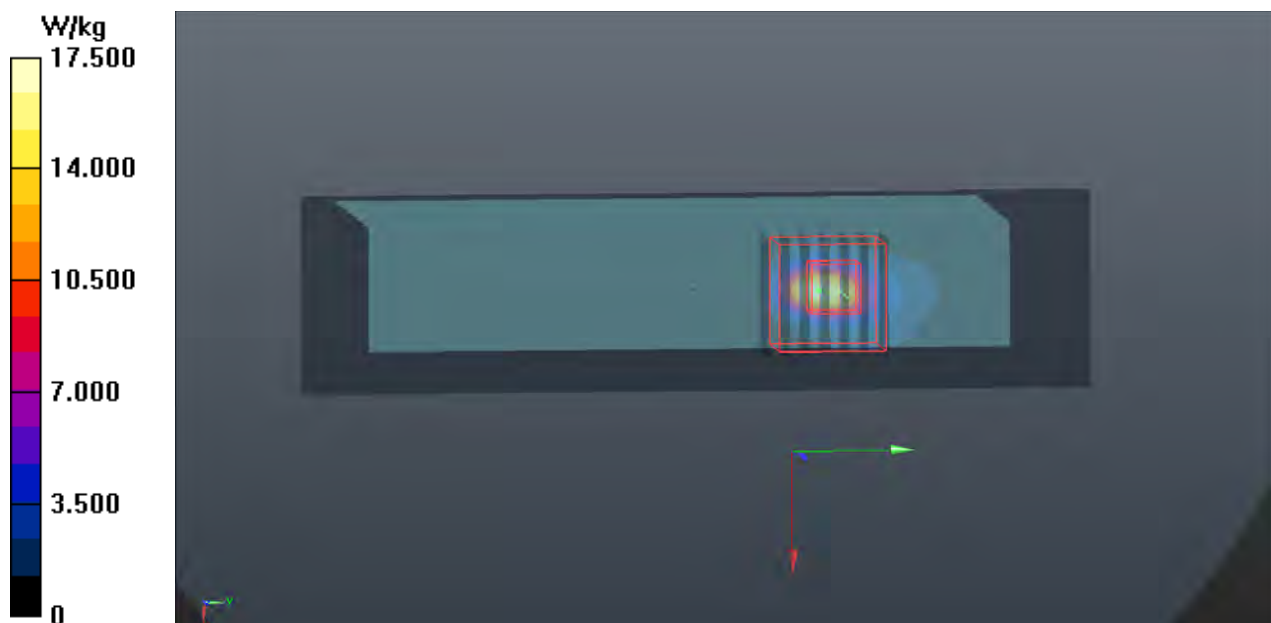

**P08 802.11a\_Limbs-ANT Side\_0cm\_Ch60****DUT: 140609E04**

Communication System: WLAN\_5G; Frequency: 5300 MHz; Duty Cycle: 1:1.07

Medium: B50T60N1\_0628 Medium parameters used:  $f = 5300$  MHz;  $\sigma = 5.542$  S/m;  $\epsilon_r = 47.565$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 21.2 °C; Liquid Temperature : 20.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3820; ConvF(4.25, 4.25, 4.25); Calibrated: 2014/05/15;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1431; Calibrated: 2014/03/24
- Phantom: SAM Phantom\_Left; Type: SAM V4.0; Serial: TP 1653
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**- Area Scan (41x161x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 23.2 W/kg


**- Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 12.72 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 52.1 W/kg

**SAR(1 g) = 8.52 W/kg; SAR(10 g) = 1.73 W/kg**

Maximum value of SAR (measured) = 20.7 W/kg

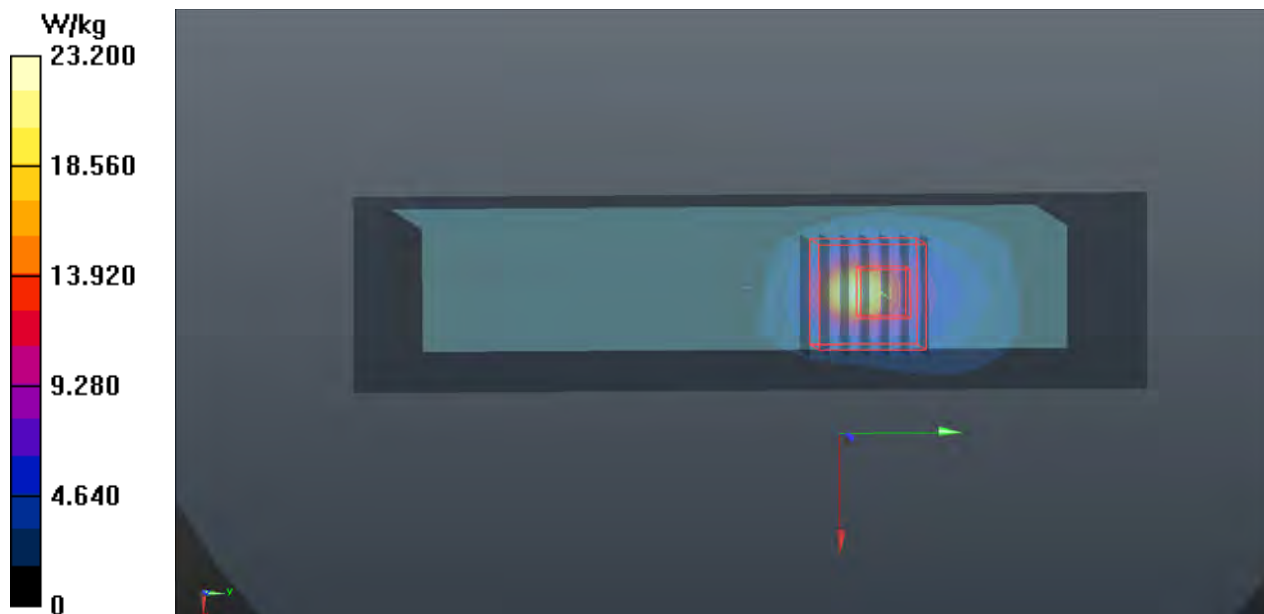

**P09 802.11n\_HT20\_Limbs-ANT Side\_0cm\_Ch116****DUT: 140609E04**

Communication System: WLAN\_5G; Frequency: 5580 MHz; Duty Cycle: 1:1.07

Medium: B50T60N1\_0628 Medium parameters used:  $f = 5580$  MHz;  $\sigma = 5.929$  S/m;  $\epsilon_r = 46.998$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 21.2 °C; Liquid Temperature : 20.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3820; ConvF(3.83, 3.83, 3.83); Calibrated: 2014/05/15;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1431; Calibrated: 2014/03/24
- Phantom: SAM Phantom\_Left; Type: SAM V4.0; Serial: TP 1653
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**- Area Scan (41x161x1):** Interpolated grid:  $dx=1.000$  mm,  $dy=1.000$  mm

Maximum value of SAR (interpolated) = 15.5 W/kg


**- Zoom Scan (7x7x12)/Cube 0:** Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=2$ mm

Reference Value = 12.52 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 38.4 W/kg

**SAR(1 g) = 6.01 W/kg; SAR(10 g) = 1.28 W/kg**

Maximum value of SAR (measured) = 14.0 W/kg

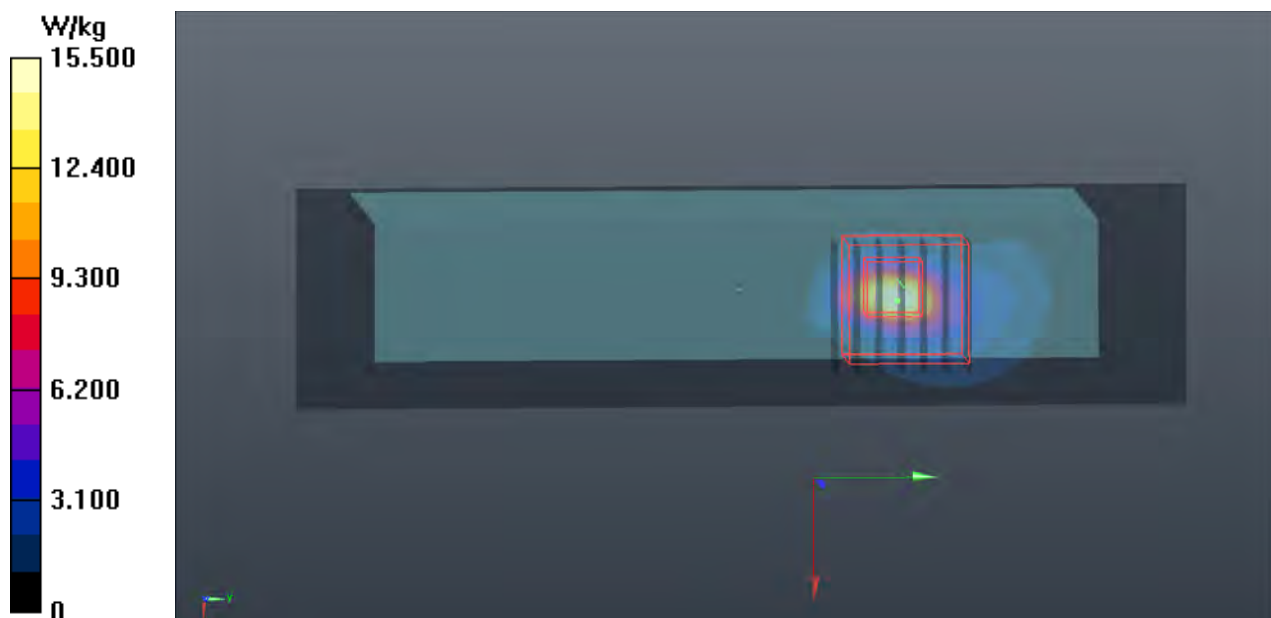

**P10 802.11n\_HT20\_Limbs-ANT Side\_0cm\_Ch165****DUT: 140609E04**

Communication System: WLAN\_5G; Frequency: 5825 MHz; Duty Cycle: 1:1.08

Medium: B50T60N1\_0628 Medium parameters used:  $f = 5825$  MHz;  $\sigma = 6.281$  S/m;  $\epsilon_r = 46.511$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 21.2 °C; Liquid Temperature : 20.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3820; ConvF(4, 4, 4); Calibrated: 2014/05/15;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1431; Calibrated: 2014/03/24
- Phantom: SAM Phantom\_Left; Type: SAM V4.0; Serial: TP 1653
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**- Area Scan (41x161x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 11.2 W/kg


**- Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 12.47 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 23.5 W/kg

**SAR(1 g) = 3.66 W/kg; SAR(10 g) = 0.806 W/kg**

Maximum value of SAR (measured) = 9.62 W/kg

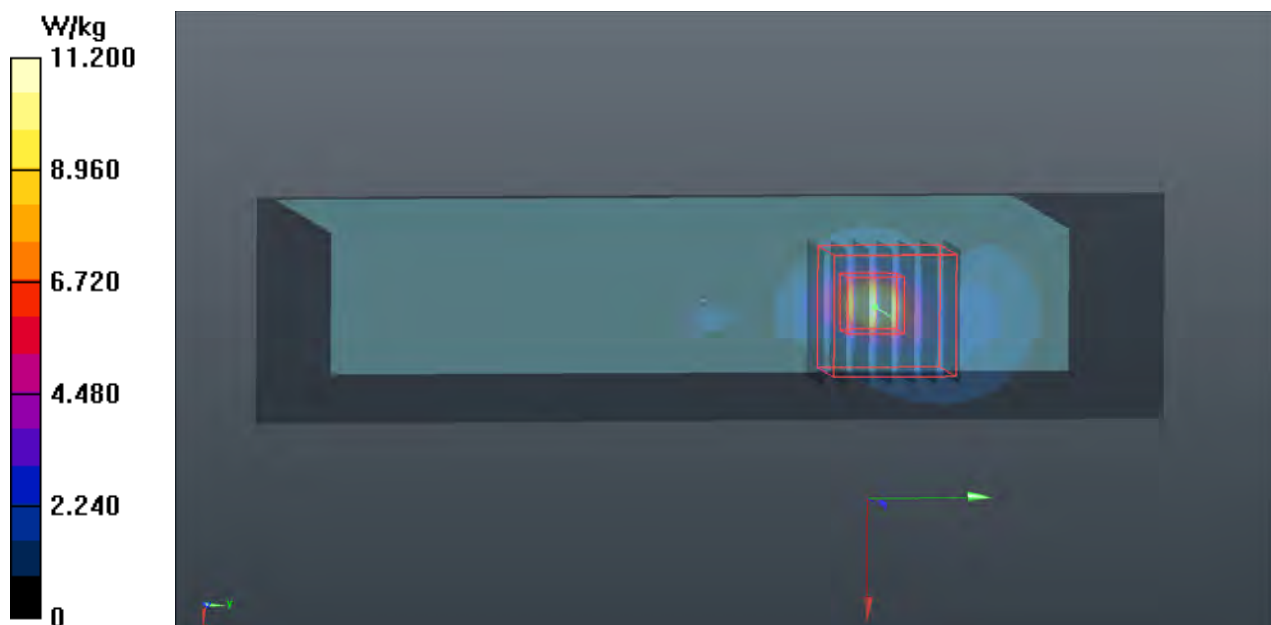



A D T

## **Appendix C. Calibration Certificate for Probe and Dipole**

The SPEAG calibration certificates are shown as follows.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Client **B.V. ADT (Auden)**

Certificate No: **D2450V2-716\_Jul13**

## CALIBRATION CERTIFICATE

Object **D2450V2 - SN: 716**

Calibration procedure(s) **QA CAL-05.v9**  
**Calibration procedure for dipole validation kits above 700 MHz**

Calibration date: **July 31, 2013**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature ( $22 \pm 3$ )°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards           | ID #               | Cal Date (Certificate No.)        | Scheduled Calibration  |
|-----------------------------|--------------------|-----------------------------------|------------------------|
| Power meter EPM-442A        | GB37480704         | 01-Nov-12 (No. 217-01640)         | Oct-13                 |
| Power sensor HP 8481A       | US37292783         | 01-Nov-12 (No. 217-01640)         | Oct-13                 |
| Reference 20 dB Attenuator  | SN: 5058 (20k)     | 04-Apr-13 (No. 217-01736)         | Apr-14                 |
| Type-N mismatch combination | SN: 5047.3 / 06327 | 04-Apr-13 (No. 217-01739)         | Apr-14                 |
| Reference Probe ES3DV3      | SN: 3205           | 28-Dec-12 (No. ES3-3205_Dec12)    | Dec-13                 |
| DAE4                        | SN: 601            | 25-Apr-13 (No. DAE4-601_Apr13)    | Apr-14                 |
| Secondary Standards         | ID #               | Check Date (in house)             | Scheduled Check        |
| Power sensor HP 8481A       | MY41092317         | 18-Oct-02 (in house check Oct-11) | In house check: Oct-13 |
| RF generator R&S SMT-06     | 100005             | 04-Aug-99 (in house check Oct-11) | In house check: Oct-13 |
| Network Analyzer HP 8753E   | US37390585 S4206   | 18-Oct-01 (in house check Oct-12) | In house check: Oct-13 |

Calibrated by: **Israe El-Naouq**      Name: **Israe El-Naouq**      Function: **Laboratory Technician**

Approved by: **Katja Pokovic**      Name: **Katja Pokovic**      Function: **Technical Manager**

Signature  
  


Issued: July 31, 2013

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

### Glossary:

|       |                                 |
|-------|---------------------------------|
| TSL   | tissue simulating liquid        |
| ConvF | sensitivity in TSL / NORM x,y,z |
| N/A   | not applicable or not measured  |

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

### Additional Documentation:

- DASY4/5 System Handbook

### Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

## Measurement Conditions

DASY system configuration, as far as not given on page 1.

|                                     |                        |             |
|-------------------------------------|------------------------|-------------|
| <b>DASY Version</b>                 | DASY5                  | V52.8.7     |
| <b>Extrapolation</b>                | Advanced Extrapolation |             |
| <b>Phantom</b>                      | Modular Flat Phantom   |             |
| <b>Distance Dipole Center - TSL</b> | 10 mm                  | with Spacer |
| <b>Zoom Scan Resolution</b>         | dx, dy, dz = 5 mm      |             |
| <b>Frequency</b>                    | 2450 MHz $\pm$ 1 MHz   |             |

## Head TSL parameters

The following parameters and calculations were applied.

|                                                | Temperature         | Permittivity   | Conductivity         |
|------------------------------------------------|---------------------|----------------|----------------------|
| <b>Nominal Head TSL parameters</b>             | 22.0 °C             | 39.2           | 1.80 mho/m           |
| <b>Measured Head TSL parameters</b>            | (22.0 $\pm$ 0.2) °C | 37.8 $\pm$ 6 % | 1.81 mho/m $\pm$ 6 % |
| <b>Head TSL temperature change during test</b> | < 0.5 °C            | ----           | ----                 |

## SAR result with Head TSL

|                                                             |                    |                                                |
|-------------------------------------------------------------|--------------------|------------------------------------------------|
| <b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</b> | Condition          |                                                |
| SAR measured                                                | 250 mW input power | 13.4 W/kg                                      |
| SAR for nominal Head TSL parameters                         | normalized to 1W   | <b>53.0 W/kg <math>\pm</math> 17.0 % (k=2)</b> |

|                                                               |                    |                                                |
|---------------------------------------------------------------|--------------------|------------------------------------------------|
| <b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</b> | condition          |                                                |
| SAR measured                                                  | 250 mW input power | 6.21 W/kg                                      |
| SAR for nominal Head TSL parameters                           | normalized to 1W   | <b>24.7 W/kg <math>\pm</math> 16.5 % (k=2)</b> |

## Body TSL parameters

The following parameters and calculations were applied.

|                                                | Temperature         | Permittivity   | Conductivity         |
|------------------------------------------------|---------------------|----------------|----------------------|
| <b>Nominal Body TSL parameters</b>             | 22.0 °C             | 52.7           | 1.95 mho/m           |
| <b>Measured Body TSL parameters</b>            | (22.0 $\pm$ 0.2) °C | 50.5 $\pm$ 6 % | 2.01 mho/m $\pm$ 6 % |
| <b>Body TSL temperature change during test</b> | < 0.5 °C            | ----           | ----                 |

## SAR result with Body TSL

|                                                             |                    |                                                |
|-------------------------------------------------------------|--------------------|------------------------------------------------|
| <b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Body TSL</b> | Condition          |                                                |
| SAR measured                                                | 250 mW input power | 12.8 W/kg                                      |
| SAR for nominal Body TSL parameters                         | normalized to 1W   | <b>50.0 W/kg <math>\pm</math> 17.0 % (k=2)</b> |

|                                                               |                    |                                                |
|---------------------------------------------------------------|--------------------|------------------------------------------------|
| <b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Body TSL</b> | condition          |                                                |
| SAR measured                                                  | 250 mW input power | 5.93 W/kg                                      |
| SAR for nominal Body TSL parameters                           | normalized to 1W   | <b>23.4 W/kg <math>\pm</math> 16.5 % (k=2)</b> |

## Appendix

### Antenna Parameters with Head TSL

|                                      |                             |
|--------------------------------------|-----------------------------|
| Impedance, transformed to feed point | $54.5 \Omega + 1.7 j\Omega$ |
| Return Loss                          | - 26.8 dB                   |

### Antenna Parameters with Body TSL

|                                      |                             |
|--------------------------------------|-----------------------------|
| Impedance, transformed to feed point | $50.8 \Omega + 3.8 j\Omega$ |
| Return Loss                          | - 28.3 dB                   |

### General Antenna Parameters and Design

|                                  |          |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.142 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

|                 |                    |
|-----------------|--------------------|
| Manufactured by | SPEAG              |
| Manufactured on | September 10, 2002 |

## DASY5 Validation Report for Head TSL

Date: 31.07.2013

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 716**

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.81$  S/m;  $\epsilon_r = 37.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.52, 4.52, 4.52); Calibrated: 28.12.2012;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 25.04.2013
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

**Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:**


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 94.443 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 27.7 W/kg

**SAR(1 g) = 13.4 W/kg; SAR(10 g) = 6.21 W/kg**

Maximum value of SAR (measured) = 17.2 W/kg

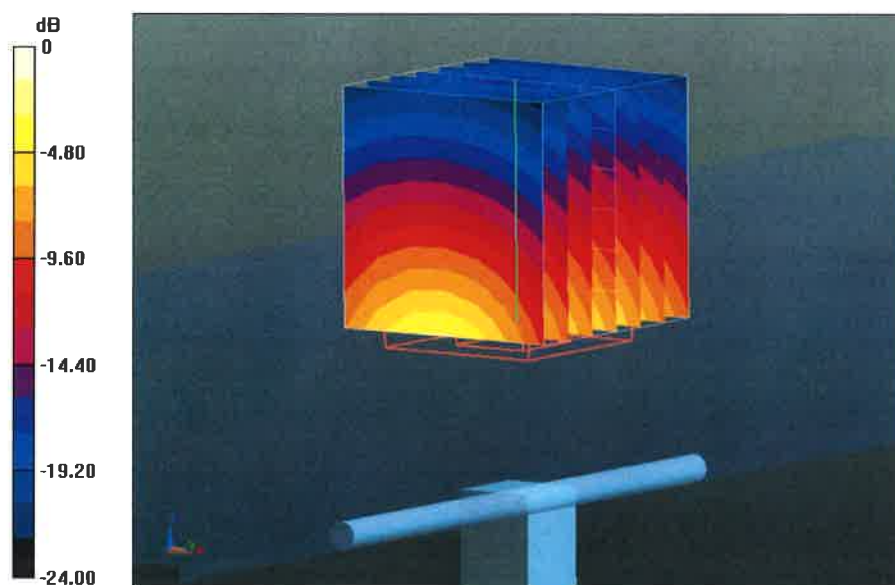


0 dB = 17.2 W/kg = 12.36 dBW/kg

Impedance Measurement Plot for Head TSL

31 Jul 2013 10:31:38  
CH1 S11 1 U FS 1: 54.498  $\Omega$  1.6699  $\Omega$  108.48  $\mu\text{H}$  2 450.000 000 MHz

\*  
De1  
CA  
Avg  
16  
H1d

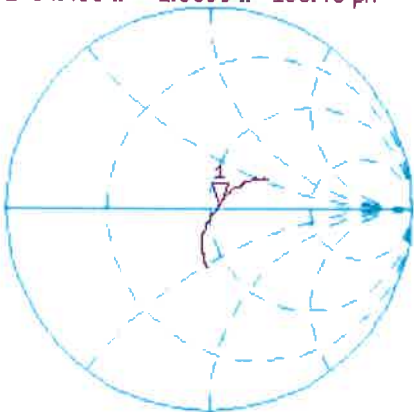

CH2 S11 LOG 5 dB/REF -20 dB 1:-26.757 dB 2 450.000 000 MHz

CA  
Avg  
16  
H1d



## DASY5 Validation Report for Body TSL

Date: 31.07.2013

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 716**

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used:  $f = 2450 \text{ MHz}$ ;  $\sigma = 2.01 \text{ S/m}$ ;  $\epsilon_r = 50.5$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.42, 4.42, 4.42); Calibrated: 28.12.2012;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 25.04.2013
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

### Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 94.443 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 26.6 W/kg

**SAR(1 g) = 12.8 W/kg; SAR(10 g) = 5.93 W/kg**

Maximum value of SAR (measured) = 16.9 W/kg

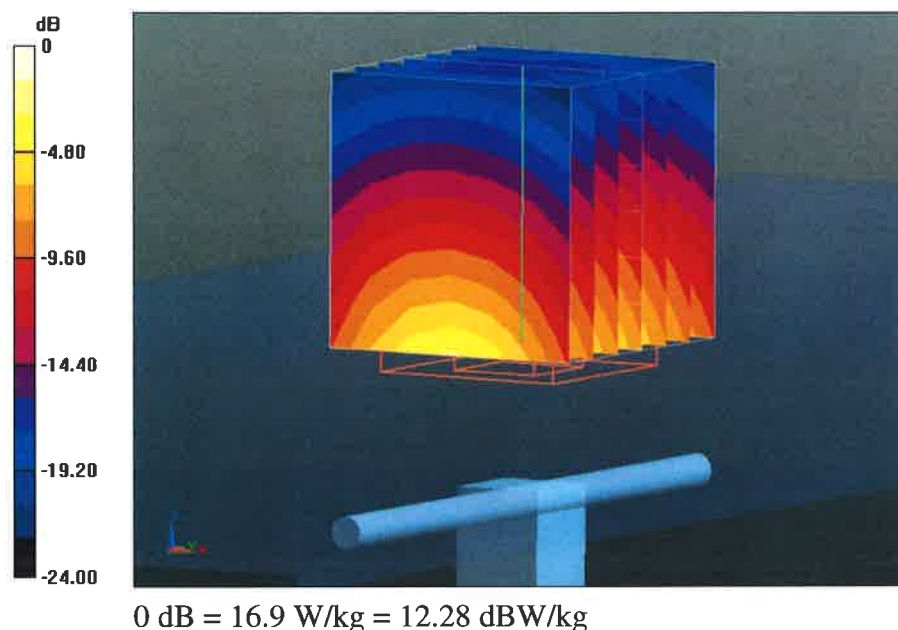

Impedance Measurement Plot for Body TSL

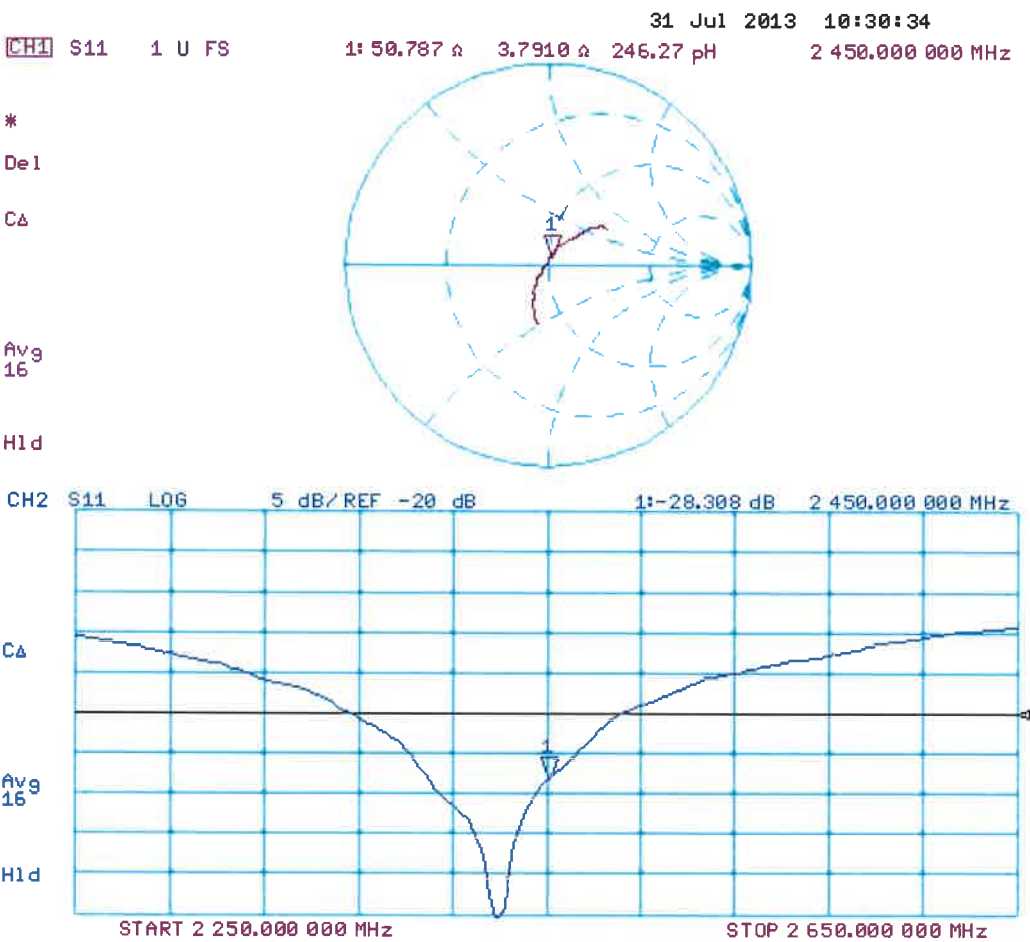



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **B.V. ADT (Auden)**

Certificate No: **D5GHzV2-1018\_Jul13**

## CALIBRATION CERTIFICATE

Object **D5GHzV2 - SN: 1018**

Calibration procedure(s) **QA CAL-22.v2**  
**Calibration procedure for dipole validation kits between 3-6 GHz**

Calibration date: **July 24, 2013**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature ( $22 \pm 3$ )°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards           | ID #               | Cal Date (Certificate No.)        | Scheduled Calibration  |
|-----------------------------|--------------------|-----------------------------------|------------------------|
| Power meter EPM-442A        | GB37480704         | 01-Nov-12 (No. 217-01640)         | Oct-13                 |
| Power sensor HP 8481A       | US37292783         | 01-Nov-12 (No. 217-01640)         | Oct-13                 |
| Reference 20 dB Attenuator  | SN: 5058 (20k)     | 04-Apr-13 (No. 217-01736)         | Apr-14                 |
| Type-N mismatch combination | SN: 5047.3 / 06327 | 04-Apr-13 (No. 217-01739)         | Apr-14                 |
| Reference Probe EX3DV4      | SN: 3503           | 28-Dec-12 (No. EX3-3503_Dec12)    | Dec-13                 |
| DAE4                        | SN: 601            | 25-Apr-13 (No. DAE4-601_Apr13)    | Apr-14                 |
| Secondary Standards         | ID #               | Check Date (in house)             | Scheduled Check        |
| Power sensor HP 8481A       | MY41092317         | 18-Oct-02 (in house check Oct-11) | In house check: Oct-13 |
| RF generator R&S SMT-06     | 100005             | 04-Aug-99 (in house check Oct-11) | In house check: Oct-13 |
| Network Analyzer HP 8753E   | US37390585 S4206   | 18-Oct-01 (in house check Oct-12) | In house check: Oct-13 |

Calibrated by: **Jeton Kastrati** **Laboratory Technician**

Approved by: **Katja Pokovic** **Technical Manager**

Signature

Issued: July 24, 2013

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

### Glossary:

|       |                                 |
|-------|---------------------------------|
| TSL   | tissue simulating liquid        |
| ConvF | sensitivity in TSL / NORM x,y,z |
| N/A   | not applicable or not measured  |

### Calibration is Performed According to the Following Standards:

- IEC 62209-2, "Evaluation of Human Exposure to Radio Frequency Fields from Handheld and Body-Mounted Wireless Communication Devices in the Frequency Range of 30 MHz to 6 GHz: Human models, Instrumentation, and Procedures"; Part 2: "Procedure to determine the Specific Absorption Rate (SAR) for including accessories and multiple transmitters", March 2010
- Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

### Additional Documentation:

- DASY4/5 System Handbook

### Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

## Measurement Conditions

DASY system configuration, as far as not given on page 1.

|                                     |                                                                                              |                                  |
|-------------------------------------|----------------------------------------------------------------------------------------------|----------------------------------|
| <b>DASY Version</b>                 | DASY5                                                                                        | V52.8.7                          |
| <b>Extrapolation</b>                | Advanced Extrapolation                                                                       |                                  |
| <b>Phantom</b>                      | Modular Flat Phantom V5.0                                                                    |                                  |
| <b>Distance Dipole Center - TSL</b> | 10 mm                                                                                        | with Spacer                      |
| <b>Zoom Scan Resolution</b>         | dx, dy = 4.0 mm, dz = 1.4 mm                                                                 | Graded Ratio = 1.4 (Z direction) |
| <b>Frequency</b>                    | 5200 MHz $\pm$ 1 MHz<br>5300 MHz $\pm$ 1 MHz<br>5600 MHz $\pm$ 1 MHz<br>5800 MHz $\pm$ 1 MHz |                                  |

## Head TSL parameters at 5200 MHz

The following parameters and calculations were applied.

|                                                | Temperature         | Permittivity   | Conductivity         |
|------------------------------------------------|---------------------|----------------|----------------------|
| <b>Nominal Head TSL parameters</b>             | 22.0 °C             | 36.0           | 4.66 mho/m           |
| <b>Measured Head TSL parameters</b>            | (22.0 $\pm$ 0.2) °C | 35.2 $\pm$ 6 % | 4.46 mho/m $\pm$ 6 % |
| <b>Head TSL temperature change during test</b> | < 0.5 °C            | ---            | ---                  |

## SAR result with Head TSL at 5200 MHz

|                                                             |                    |                                                |
|-------------------------------------------------------------|--------------------|------------------------------------------------|
| <b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</b> | Condition          |                                                |
| SAR measured                                                | 100 mW input power | 7.97 W/kg                                      |
| SAR for nominal Head TSL parameters                         | normalized to 1W   | <b>79.2 W/kg <math>\pm</math> 19.9 % (k=2)</b> |

|                                                               |                    |                                                |
|---------------------------------------------------------------|--------------------|------------------------------------------------|
| <b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</b> | condition          |                                                |
| SAR measured                                                  | 100 mW input power | 2.29 W/kg                                      |
| SAR for nominal Head TSL parameters                           | normalized to 1W   | <b>22.7 W/kg <math>\pm</math> 19.5 % (k=2)</b> |

### Head TSL parameters at 5300 MHz

The following parameters and calculations were applied.

|                                         | Temperature     | Permittivity | Conductivity     |
|-----------------------------------------|-----------------|--------------|------------------|
| Nominal Head TSL parameters             | 22.0 °C         | 35.9         | 4.76 mho/m       |
| Measured Head TSL parameters            | (22.0 ± 0.2) °C | 35.1 ± 6 %   | 4.55 mho/m ± 6 % |
| Head TSL temperature change during test | < 0.5 °C        | ----         | ----             |

### SAR result with Head TSL at 5300 MHz

|                                                             |                    |                                   |
|-------------------------------------------------------------|--------------------|-----------------------------------|
| <b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</b> | Condition          |                                   |
| SAR measured                                                | 100 mW input power | 8.31 W/kg                         |
| SAR for nominal Head TSL parameters                         | normalized to 1W   | <b>82.6 W / kg ± 19.9 % (k=2)</b> |

|                                                               |                    |                                 |
|---------------------------------------------------------------|--------------------|---------------------------------|
| <b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</b> | condition          |                                 |
| SAR measured                                                  | 100 mW input power | 2.39 W/kg                       |
| SAR for nominal Head TSL parameters                           | normalized to 1W   | <b>23.7 W/kg ± 19.5 % (k=2)</b> |

### Head TSL parameters at 5600 MHz

The following parameters and calculations were applied.

|                                         | Temperature     | Permittivity | Conductivity     |
|-----------------------------------------|-----------------|--------------|------------------|
| Nominal Head TSL parameters             | 22.0 °C         | 35.5         | 5.07 mho/m       |
| Measured Head TSL parameters            | (22.0 ± 0.2) °C | 34.7 ± 6 %   | 4.85 mho/m ± 6 % |
| Head TSL temperature change during test | < 0.5 °C        | ----         | ----             |

### SAR result with Head TSL at 5600 MHz

|                                                             |                    |                                 |
|-------------------------------------------------------------|--------------------|---------------------------------|
| <b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</b> | Condition          |                                 |
| SAR measured                                                | 100 mW input power | 8.34 W/kg                       |
| SAR for nominal Head TSL parameters                         | normalized to 1W   | <b>82.8 W/kg ± 19.9 % (k=2)</b> |

|                                                               |                    |                                 |
|---------------------------------------------------------------|--------------------|---------------------------------|
| <b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</b> | condition          |                                 |
| SAR measured                                                  | 100 mW input power | 2.38 W/kg                       |
| SAR for nominal Head TSL parameters                           | normalized to 1W   | <b>23.6 W/kg ± 19.5 % (k=2)</b> |

## Head TSL parameters at 5800 MHz

The following parameters and calculations were applied.

|                                         | Temperature     | Permittivity | Conductivity     |
|-----------------------------------------|-----------------|--------------|------------------|
| Nominal Head TSL parameters             | 22.0 °C         | 35.3         | 5.27 mho/m       |
| Measured Head TSL parameters            | (22.0 ± 0.2) °C | 34.4 ± 6 %   | 5.05 mho/m ± 6 % |
| Head TSL temperature change during test | < 0.5 °C        | ----         | ----             |

## SAR result with Head TSL at 5800 MHz

|                                                             |                    |                                 |
|-------------------------------------------------------------|--------------------|---------------------------------|
| <b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</b> | Condition          |                                 |
| SAR measured                                                | 100 mW input power | 8.01 W/kg                       |
| SAR for nominal Head TSL parameters                         | normalized to 1W   | <b>79.5 W/kg ± 19.9 % (k=2)</b> |

|                                                               |                    |                                 |
|---------------------------------------------------------------|--------------------|---------------------------------|
| <b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</b> | condition          |                                 |
| SAR measured                                                  | 100 mW input power | 2.28 W/kg                       |
| SAR for nominal Head TSL parameters                           | normalized to 1W   | <b>22.6 W/kg ± 19.5 % (k=2)</b> |

### Body TSL parameters at 5200 MHz

The following parameters and calculations were applied.

|                                         | Temperature     | Permittivity | Conductivity     |
|-----------------------------------------|-----------------|--------------|------------------|
| Nominal Body TSL parameters             | 22.0 °C         | 49.0         | 5.30 mho/m       |
| Measured Body TSL parameters            | (22.0 ± 0.2) °C | 48.9 ± 6 %   | 5.40 mho/m ± 6 % |
| Body TSL temperature change during test | < 0.5 °C        | ----         | ----             |

### SAR result with Body TSL at 5200 MHz

|                                                             |                    |                                 |
|-------------------------------------------------------------|--------------------|---------------------------------|
| <b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Body TSL</b> | Condition          |                                 |
| SAR measured                                                | 100 mW input power | 7.49 W/kg                       |
| SAR for nominal Body TSL parameters                         | normalized to 1W   | <b>74.9 W/kg ± 19.9 % (k=2)</b> |

|                                                               |                    |                                 |
|---------------------------------------------------------------|--------------------|---------------------------------|
| <b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Body TSL</b> | condition          |                                 |
| SAR measured                                                  | 100 mW input power | 2.10 W/kg                       |
| SAR for nominal Body TSL parameters                           | normalized to 1W   | <b>21.0 W/kg ± 19.5 % (k=2)</b> |

### Body TSL parameters at 5300 MHz

The following parameters and calculations were applied.

|                                         | Temperature     | Permittivity | Conductivity     |
|-----------------------------------------|-----------------|--------------|------------------|
| Nominal Body TSL parameters             | 22.0 °C         | 48.9         | 5.42 mho/m       |
| Measured Body TSL parameters            | (22.0 ± 0.2) °C | 46.8 ± 6 %   | 5.55 mho/m ± 6 % |
| Body TSL temperature change during test | < 0.5 °C        | ----         | ----             |

### SAR result with Body TSL at 5300 MHz

|                                                             |                    |                                 |
|-------------------------------------------------------------|--------------------|---------------------------------|
| <b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Body TSL</b> | Condition          |                                 |
| SAR measured                                                | 100 mW input power | 7.63 W/kg                       |
| SAR for nominal Body TSL parameters                         | normalized to 1W   | <b>75.7 W/kg ± 19.9 % (k=2)</b> |

|                                                               |                    |                                 |
|---------------------------------------------------------------|--------------------|---------------------------------|
| <b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Body TSL</b> | condition          |                                 |
| SAR measured                                                  | 100 mW input power | 2.15 W/kg                       |
| SAR for nominal Body TSL parameters                           | normalized to 1W   | <b>21.3 W/kg ± 19.5 % (k=2)</b> |

### Body TSL parameters at 5600 MHz

The following parameters and calculations were applied.

|                                         | Temperature     | Permittivity | Conductivity     |
|-----------------------------------------|-----------------|--------------|------------------|
| Nominal Body TSL parameters             | 22.0 °C         | 48.5         | 5.77 mho/m       |
| Measured Body TSL parameters            | (22.0 ± 0.2) °C | 48.2 ± 6 %   | 5.93 mho/m ± 6 % |
| Body TSL temperature change during test | < 0.5 °C        | ----         | ----             |

### SAR result with Body TSL at 5600 MHz

|                                                             |                    |                                 |
|-------------------------------------------------------------|--------------------|---------------------------------|
| <b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Body TSL</b> | Condition          |                                 |
| SAR measured                                                | 100 mW input power | 8.04 W/kg                       |
| SAR for nominal Body TSL parameters                         | normalized to 1W   | <b>80.4 W/kg ± 19.9 % (k=2)</b> |

|                                                               |                    |                                 |
|---------------------------------------------------------------|--------------------|---------------------------------|
| <b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Body TSL</b> | condition          |                                 |
| SAR measured                                                  | 100 mW input power | 2.24 W/kg                       |
| SAR for nominal Body TSL parameters                           | normalized to 1W   | <b>22.4 W/kg ± 19.5 % (k=2)</b> |

### Body TSL parameters at 5800 MHz

The following parameters and calculations were applied.

|                                         | Temperature     | Permittivity | Conductivity     |
|-----------------------------------------|-----------------|--------------|------------------|
| Nominal Body TSL parameters             | 22.0 °C         | 48.2         | 6.00 mho/m       |
| Measured Body TSL parameters            | (22.0 ± 0.2) °C | 47.9 ± 6 %   | 6.21 mho/m ± 6 % |
| Body TSL temperature change during test | < 0.5 °C        | -----        | -----            |

### SAR result with Body TSL at 5800 MHz

|                                                             |                    |                                 |
|-------------------------------------------------------------|--------------------|---------------------------------|
| <b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Body TSL</b> | Condition          |                                 |
| SAR measured                                                | 100 mW input power | 7.49 W/kg                       |
| SAR for nominal Body TSL parameters                         | normalized to 1W   | <b>74.9 W/kg ± 19.9 % (k=2)</b> |

|                                                               |                    |                                 |
|---------------------------------------------------------------|--------------------|---------------------------------|
| <b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Body TSL</b> | condition          |                                 |
| SAR measured                                                  | 100 mW input power | 2.08 W/kg                       |
| SAR for nominal Body TSL parameters                           | normalized to 1W   | <b>20.8 W/kg ± 19.5 % (k=2)</b> |

## Appendix

### Antenna Parameters with Head TSL at 5200 MHz

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 52.0 $\Omega$ - 8.6 j $\Omega$ |
| Return Loss                          | - 21.3 dB                      |

### Antenna Parameters with Head TSL at 5300 MHz

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 54.0 $\Omega$ - 1.4 j $\Omega$ |
| Return Loss                          | - 27.9 dB                      |

### Antenna Parameters with Head TSL at 5600 MHz

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 54.7 $\Omega$ - 6.5 j $\Omega$ |
| Return Loss                          | - 22.4 dB                      |

### Antenna Parameters with Head TSL at 5800 MHz

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 54.3 $\Omega$ + 0.8 j $\Omega$ |
| Return Loss                          | - 27.6 dB                      |

### Antenna Parameters with Body TSL at 5200 MHz

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 51.1 $\Omega$ - 8.4 j $\Omega$ |
| Return Loss                          | - 21.5 dB                      |

### Antenna Parameters with Body TSL at 5300 MHz

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 53.7 $\Omega$ - 1.8 j $\Omega$ |
| Return Loss                          | - 28.1 dB                      |

### Antenna Parameters with Body TSL at 5600 MHz

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 56.2 $\Omega$ - 3.1 j $\Omega$ |
| Return Loss                          | - 23.7 dB                      |

### Antenna Parameters with Body TSL at 5800 MHz

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 57.1 $\Omega$ + 3.7 j $\Omega$ |
| Return Loss                          | - 22.6 dB                      |

## General Antenna Parameters and Design

|                                  |          |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.202 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

## Additional EUT Data

|                 |                   |
|-----------------|-------------------|
| Manufactured by | SPEAG             |
| Manufactured on | February 05, 2004 |

## DASY5 Validation Report for Head TSL

Date: 23.07.2013

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 5GHz; Type: D5GHzV2; Serial: D5GHzV2 - SN: 1018**

Communication System: UID 0 - CW ; Frequency: 5200 MHz, Frequency: 5300 MHz, Frequency: 5600 MHz, Frequency: 5800 MHz

Medium parameters used:  $f = 5200$  MHz;  $\sigma = 4.46$  S/m;  $\epsilon_r = 35.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>, Medium parameters used:  $f = 5300$  MHz;  $\sigma = 4.55$  S/m;  $\epsilon_r = 35.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>, Medium parameters used:  $f = 5600$  MHz;  $\sigma = 4.85$  S/m;  $\epsilon_r = 34.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>, Medium parameters used:  $f = 5800$  MHz;  $\sigma = 5.05$  S/m;  $\epsilon_r = 34.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(5.41, 5.41, 5.41); Calibrated: 28.12.2012, ConvF(5.1, 5.1, 5.1); Calibrated: 28.12.2012, ConvF(4.76, 4.76, 4.76); Calibrated: 28.12.2012, ConvF(4.81, 4.81, 4.81); Calibrated: 28.12.2012;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 25.04.2013
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

**Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5200 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 63.126 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 28.9 W/kg

**SAR(1 g) = 7.97 W/kg; SAR(10 g) = 2.29 W/kg**

Maximum value of SAR (measured) = 18.4 W/kg

**Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5300 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 64.006 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 30.8 W/kg

**SAR(1 g) = 8.31 W/kg; SAR(10 g) = 2.39 W/kg**

Maximum value of SAR (measured) = 19.5 W/kg

**Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm


Reference Value = 62.606 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 32.4 W/kg

**SAR(1 g) = 8.34 W/kg; SAR(10 g) = 2.38 W/kg**


Maximum value of SAR (measured) = 20.0 W/kg

**Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5800 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 60.010 V/m; Power Drift = 0.09 dB  
Peak SAR (extrapolated) = 32.6 W/kg  
**SAR(1 g) = 8.01 W/kg; SAR(10 g) = 2.28 W/kg**

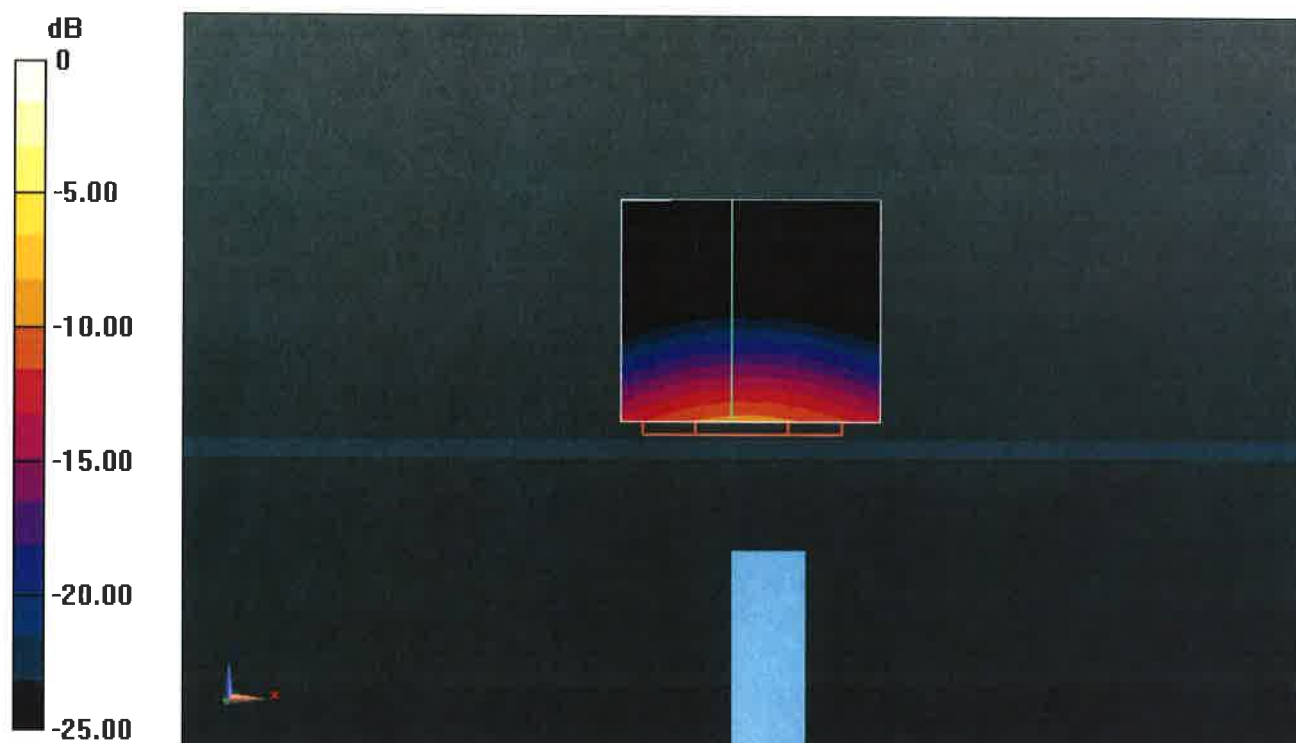

0 dB = 19.5 W/kg = 12.90 dBW/kg

# Impedance Measurement Plot for Head TSL

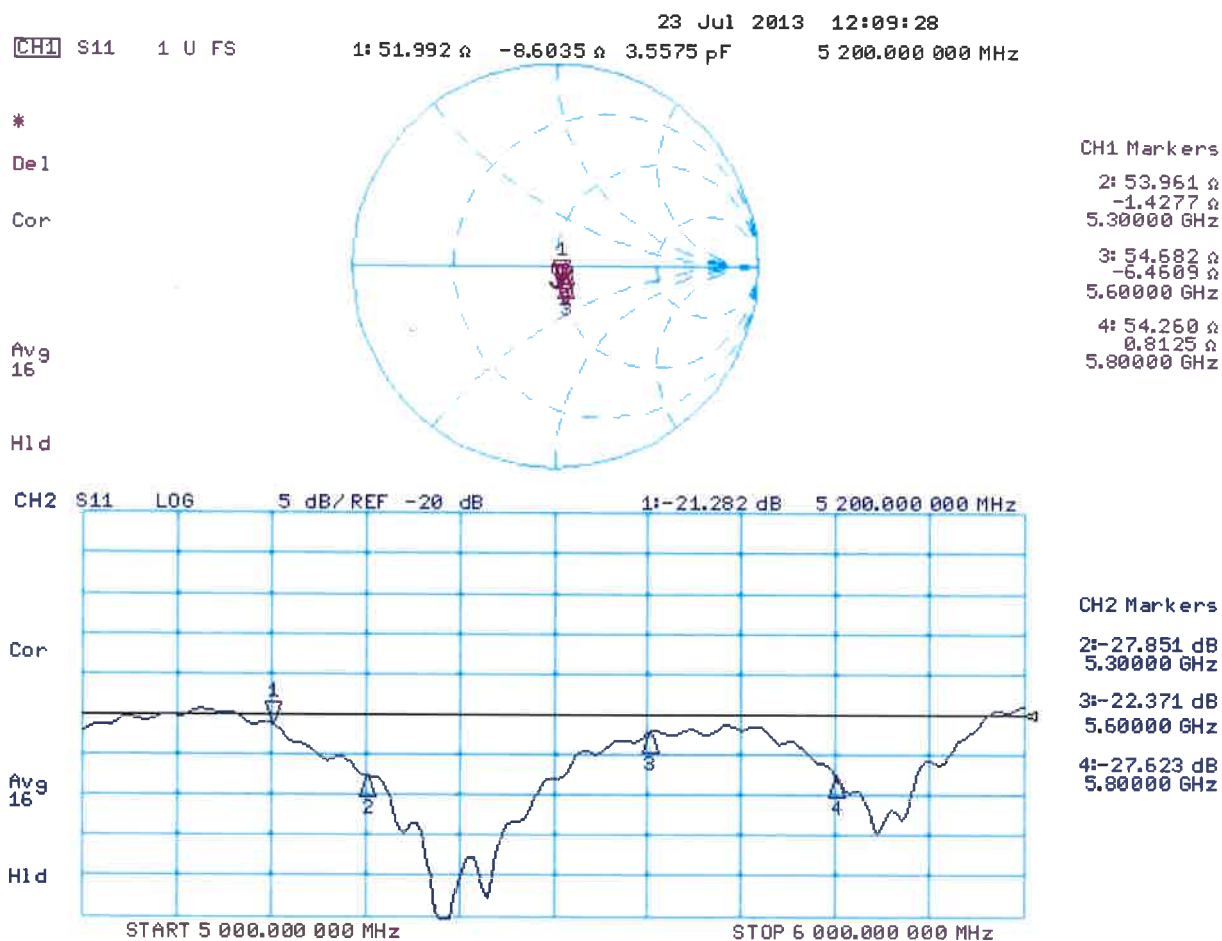

## DASY5 Validation Report for Body TSL

Date: 24.07.2013

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 5GHz; Type: D5GHzV2; Serial: D5GHzV2 - SN: 1018**

Communication System: UID 0 - CW ; Frequency: 5200 MHz, Frequency: 5300 MHz, Frequency: 5600 MHz, Frequency: 5800 MHz

Medium parameters used:  $f = 5200$  MHz;  $\sigma = 5.4$  S/m;  $\epsilon_r = 48.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>, Medium parameters used:  $f = 5300$  MHz;  $\sigma = 5.55$  S/m;  $\epsilon_r = 46.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>, Medium parameters used:  $f = 5600$  MHz;  $\sigma = 5.93$  S/m;  $\epsilon_r = 48.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>, Medium parameters used:  $f = 5800$  MHz;  $\sigma = 6.21$  S/m;  $\epsilon_r = 47.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(4.91, 4.91, 4.91); Calibrated: 28.12.2012, ConvF(4.67, 4.67, 4.67); Calibrated: 28.12.2012, ConvF(4.22, 4.22, 4.22); Calibrated: 28.12.2012, ConvF(4.38, 4.38, 4.38); Calibrated: 28.12.2012;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 25.04.2013
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

**Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5200 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 59.030 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 29.0 W/kg

**SAR(1 g) = 7.49 W/kg; SAR(10 g) = 2.1 W/kg**

Maximum value of SAR (measured) = 17.4 W/kg

**Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5300 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 59.012 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 30.3 W/kg

**SAR(1 g) = 7.63 W/kg; SAR(10 g) = 2.15 W/kg**

Maximum value of SAR (measured) = 17.8 W/kg

**Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm


Reference Value = 58.525 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 34.9 W/kg

**SAR(1 g) = 8.04 W/kg; SAR(10 g) = 2.24 W/kg**


Maximum value of SAR (measured) = 19.4 W/kg

**Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5800 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 55.098 V/m; Power Drift = 0.01 dB  
Peak SAR (extrapolated) = 34.3 W/kg  
**SAR(1 g) = 7.49 W/kg; SAR(10 g) = 2.08 W/kg**  
Maximum value of SAR (measured) = 18.3 W/kg

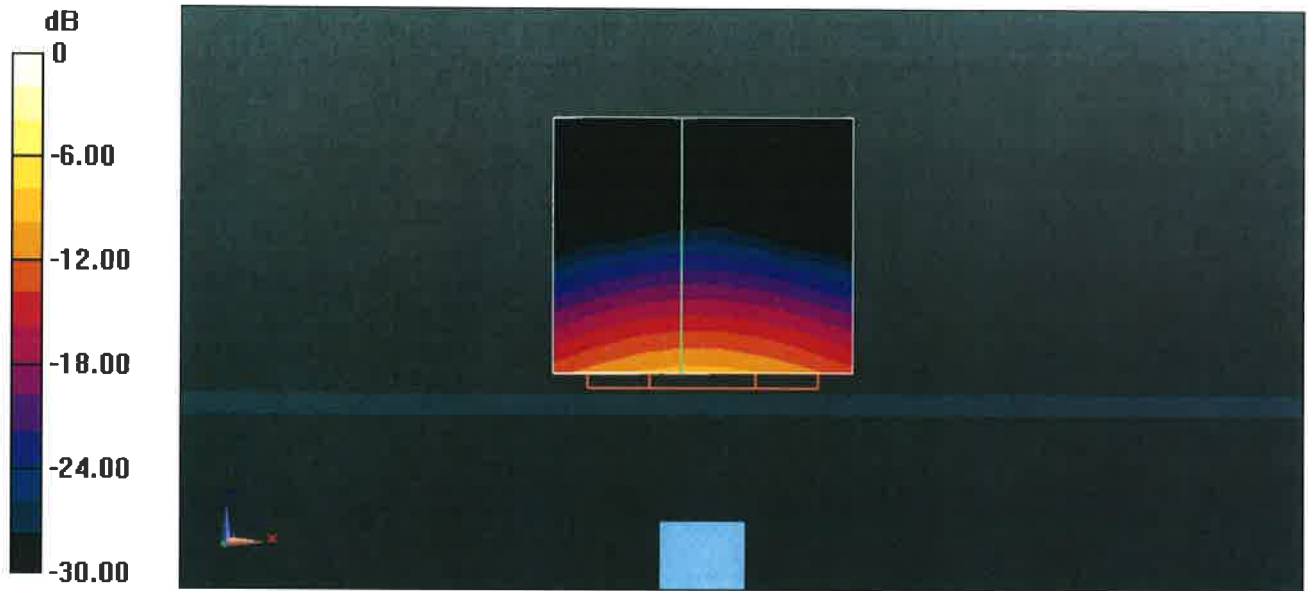

0 dB = 18.3 W/kg = 12.62 dBW/kg

## Impedance Measurement Plot for Body TSL

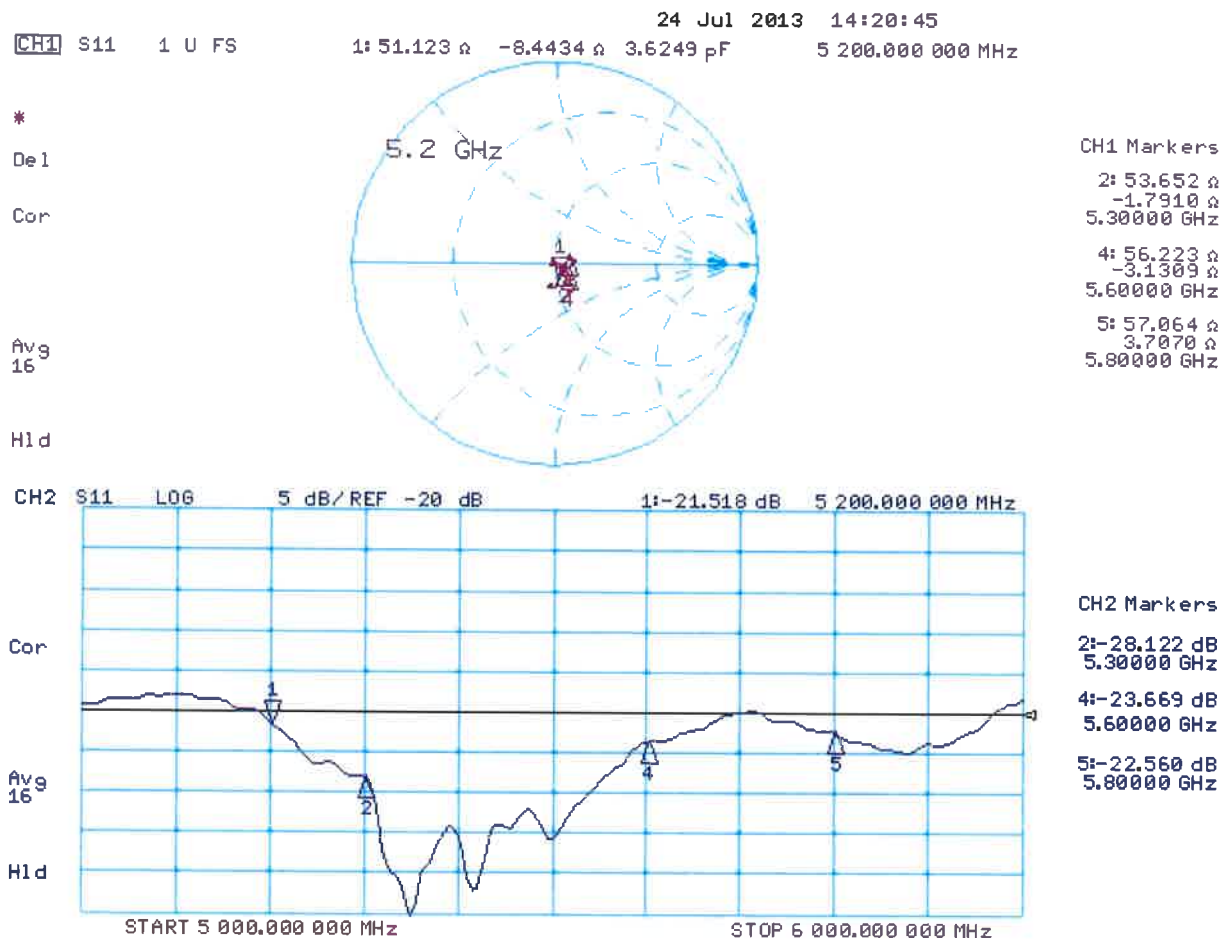



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Client **B.V.ADT (Auden)**

Certificate No: **EX3-3590\_Mar14**

## CALIBRATION CERTIFICATE

Object **EX3DV4 - SN:3590**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-14.v4, QA CAL-23.v5, QA CAL-25.v6**  
**Calibration procedure for dosimetric E-field probes**

Calibration date: **March 4, 2014**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature ( $22 \pm 3$ )°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards          | ID              | Cal Date (Certificate No.)        | Scheduled Calibration  |
|----------------------------|-----------------|-----------------------------------|------------------------|
| Power meter E4419B         | GB41293874      | 04-Apr-13 (No. 217-01733)         | Apr-14                 |
| Power sensor E4412A        | MY41498087      | 04-Apr-13 (No. 217-01733)         | Apr-14                 |
| Reference 3 dB Attenuator  | SN: S5054 (3c)  | 04-Apr-13 (No. 217-01737)         | Apr-14                 |
| Reference 20 dB Attenuator | SN: S5277 (20x) | 04-Apr-13 (No. 217-01735)         | Apr-14                 |
| Reference 30 dB Attenuator | SN: S5129 (30b) | 04-Apr-13 (No. 217-01738)         | Apr-14                 |
| Reference Probe ES3DV2     | SN: 3013        | 30-Dec-13 (No. ES3-3013_Dec13)    | Dec-14                 |
| DAE4                       | SN: 660         | 13-Dec-13 (No. DAE4-660_Dec13)    | Dec-14                 |
|                            |                 |                                   |                        |
| Secondary Standards        | ID              | Check Date (in house)             | Scheduled Check        |
| RF generator HP 8648C      | US3642U01700    | 4-Aug-99 (in house check Apr-13)  | In house check: Apr-16 |
| Network Analyzer HP 8753E  | US37390585      | 18-Oct-01 (in house check Oct-13) | In house check: Oct-14 |

|                                                                                                                 | Name                  | Function                     | Signature                                                                             |
|-----------------------------------------------------------------------------------------------------------------|-----------------------|------------------------------|---------------------------------------------------------------------------------------|
| Calibrated by:                                                                                                  | <b>Jeton Kastrati</b> | <b>Laboratory Technician</b> |  |
| Approved by:                                                                                                    | <b>Katja Pokovic</b>  | <b>Technical Manager</b>     |  |
|                                                                                                                 |                       |                              | Issued: March 4, 2014                                                                 |
| This calibration certificate shall not be reproduced except in full without written approval of the laboratory. |                       |                              |                                                                                       |



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

### Glossary:

|                          |                                                                                                                                                         |
|--------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| TSL                      | tissue simulating liquid                                                                                                                                |
| NORM <sub>x,y,z</sub>    | sensitivity in free space                                                                                                                               |
| ConvF                    | sensitivity in TSL / NORM <sub>x,y,z</sub>                                                                                                              |
| DCP                      | diode compression point                                                                                                                                 |
| CF                       | crest factor (1/duty_cycle) of the RF signal                                                                                                            |
| A, B, C, D               | modulation dependent linearization parameters                                                                                                           |
| Polarization $\phi$      | $\phi$ rotation around probe axis                                                                                                                       |
| Polarization $\vartheta$ | $\vartheta$ rotation around an axis that is in the plane normal to probe axis (at measurement center),<br>i.e., $\vartheta = 0$ is normal to probe axis |
| Connector Angle          | information used in DASY system to align probe sensor X to the robot coordinate system                                                                  |

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

### Methods Applied and Interpretation of Parameters:

- NORM<sub>x,y,z</sub>**: Assessed for E-field polarization  $\vartheta = 0$  ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide). NORM<sub>x,y,z</sub> are only intermediate values, i.e., the uncertainties of NORM<sub>x,y,z</sub> does not affect the E<sup>2</sup>-field uncertainty inside TSL (see below *ConvF*).
- NORM(*f*)<sub>x,y,z</sub>** = NORM<sub>x,y,z</sub> \* *frequency\_response* (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConvF*.
- DCP<sub>x,y,z</sub>**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A<sub>x,y,z</sub>; B<sub>x,y,z</sub>; C<sub>x,y,z</sub>; D<sub>x,y,z</sub>; VR<sub>x,y,z</sub>**: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800$  MHz) and inside waveguide using analytical field distributions based on power measurements for  $f > 800$  MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM<sub>x,y,z</sub> \* *ConvF* whereby the uncertainty corresponds to that given for *ConvF*. A frequency dependent *ConvF* is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50$  MHz to  $\pm 100$  MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle**: The angle is assessed using the information gained by determining the NORM<sub>x</sub> (no uncertainty required).

# Probe EX3DV4

## SN:3590

|               |                |
|---------------|----------------|
| Manufactured: | March 23, 2009 |
| Calibrated:   | March 4, 2014  |

Calibrated for DASY/EASY Systems  
(Note: non-compatible with DASY2 system!)

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:3590

### Basic Calibration Parameters

|                                                           | Sensor X | Sensor Y | Sensor Z | Unc (k=2) |
|-----------------------------------------------------------|----------|----------|----------|-----------|
| Norm ( $\mu\text{V}/(\text{V}/\text{m})^2$ ) <sup>A</sup> | 0.50     | 0.47     | 0.50     | ± 10.1 %  |
| DCP (mV) <sup>B</sup>                                     | 94.6     | 96.4     | 95.9     |           |

### Modulation Calibration Parameters

| UID | Communication System Name |   | A<br>dB | B<br>dB $\sqrt{\mu\text{V}}$ | C   | D<br>dB | VR<br>mV | Unc <sup>E</sup><br>(k=2) |
|-----|---------------------------|---|---------|------------------------------|-----|---------|----------|---------------------------|
| 0   | CW                        | X | 0.0     | 0.0                          | 1.0 | 0.00    | 146.4    | ±3.5 %                    |
|     |                           | Y | 0.0     | 0.0                          | 1.0 |         | 168.7    |                           |
|     |                           | Z | 0.0     | 0.0                          | 1.0 |         | 160.8    |                           |

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

<sup>A</sup> The uncertainties of NormX,Y,Z do not affect the  $E^2$ -field uncertainty inside TSL (see Pages 5 and 6).

<sup>B</sup> Numerical linearization parameter: uncertainty not required.

<sup>E</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:3590

### Calibration Parameter Determined in Head Tissue Simulating Media

| f (MHz) <sup>C</sup> | Relative Permittivity <sup>F</sup> | Conductivity (S/m) <sup>F</sup> | ConvF X | ConvF Y | ConvF Z | Alpha <sup>G</sup> | Depth <sup>G</sup> (mm) | Unct. (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-------------|
| 750                  | 41.9                               | 0.89                            | 10.89   | 10.89   | 10.89   | 0.25               | 1.15                    | ± 12.0 %    |
| 835                  | 41.5                               | 0.90                            | 10.52   | 10.52   | 10.52   | 0.62               | 0.67                    | ± 12.0 %    |
| 900                  | 41.5                               | 0.97                            | 10.53   | 10.53   | 10.53   | 0.61               | 0.63                    | ± 12.0 %    |
| 1450                 | 40.5                               | 1.20                            | 9.12    | 9.12    | 9.12    | 0.80               | 0.50                    | ± 12.0 %    |
| 1640                 | 40.3                               | 1.29                            | 8.96    | 8.96    | 8.96    | 0.76               | 0.55                    | ± 12.0 %    |
| 1750                 | 40.1                               | 1.37                            | 8.92    | 8.92    | 8.92    | 0.80               | 0.56                    | ± 12.0 %    |
| 1900                 | 40.0                               | 1.40                            | 8.70    | 8.70    | 8.70    | 0.43               | 0.74                    | ± 12.0 %    |
| 2000                 | 40.0                               | 1.40                            | 8.61    | 8.61    | 8.61    | 0.39               | 0.79                    | ± 12.0 %    |
| 2300                 | 39.5                               | 1.67                            | 8.30    | 8.30    | 8.30    | 0.35               | 0.82                    | ± 12.0 %    |
| 2450                 | 39.2                               | 1.80                            | 7.95    | 7.95    | 7.95    | 0.53               | 0.68                    | ± 12.0 %    |
| 2600                 | 39.0                               | 1.96                            | 7.76    | 7.76    | 7.76    | 0.49               | 0.73                    | ± 12.0 %    |
| 3500                 | 37.9                               | 2.91                            | 7.88    | 7.88    | 7.88    | 0.88               | 0.57                    | ± 13.1 %    |
| 5200                 | 36.0                               | 4.66                            | 5.57    | 5.57    | 5.57    | 0.35               | 1.80                    | ± 13.1 %    |
| 5300                 | 35.9                               | 4.76                            | 5.33    | 5.33    | 5.33    | 0.35               | 1.80                    | ± 13.1 %    |
| 5500                 | 35.6                               | 4.96                            | 5.06    | 5.06    | 5.06    | 0.40               | 1.80                    | ± 13.1 %    |
| 5600                 | 35.5                               | 5.07                            | 4.94    | 4.94    | 4.94    | 0.35               | 1.80                    | ± 13.1 %    |
| 5800                 | 35.3                               | 5.27                            | 4.89    | 4.89    | 4.89    | 0.40               | 1.80                    | ± 13.1 %    |

<sup>C</sup> Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:3590

### Calibration Parameter Determined in Body Tissue Simulating Media


| f (MHz) <sup>C</sup> | Relative Permittivity <sup>F</sup> | Conductivity (S/m) <sup>F</sup> | ConvF X | ConvF Y | ConvF Z | Alpha <sup>G</sup> | Depth <sup>G</sup> (mm) | Unct. (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-------------|
| 750                  | 55.5                               | 0.96                            | 10.39   | 10.39   | 10.39   | 0.43               | 0.81                    | ± 12.0 %    |
| 835                  | 55.2                               | 0.97                            | 10.31   | 10.31   | 10.31   | 0.77               | 0.60                    | ± 12.0 %    |
| 900                  | 55.0                               | 1.05                            | 10.13   | 10.13   | 10.13   | 0.77               | 0.60                    | ± 12.0 %    |
| 1450                 | 54.0                               | 1.30                            | 8.83    | 8.83    | 8.83    | 0.34               | 0.94                    | ± 12.0 %    |
| 1640                 | 53.8                               | 1.40                            | 9.04    | 9.04    | 9.04    | 0.40               | 0.88                    | ± 12.0 %    |
| 1750                 | 53.4                               | 1.49                            | 8.35    | 8.35    | 8.35    | 0.52               | 0.76                    | ± 12.0 %    |
| 1900                 | 53.3                               | 1.52                            | 8.11    | 8.11    | 8.11    | 0.37               | 0.86                    | ± 12.0 %    |
| 2000                 | 53.3                               | 1.52                            | 8.24    | 8.24    | 8.24    | 0.36               | 0.85                    | ± 12.0 %    |
| 2300                 | 52.9                               | 1.81                            | 7.96    | 7.96    | 7.96    | 0.59               | 0.65                    | ± 12.0 %    |
| 2450                 | 52.7                               | 1.95                            | 7.72    | 7.72    | 7.72    | 0.80               | 0.50                    | ± 12.0 %    |
| 2600                 | 52.5                               | 2.16                            | 7.49    | 7.49    | 7.49    | 0.80               | 0.50                    | ± 12.0 %    |
| 3500                 | 51.3                               | 3.31                            | 7.51    | 7.51    | 7.51    | 0.68               | 0.74                    | ± 13.1 %    |
| 5200                 | 49.0                               | 5.30                            | 5.16    | 5.16    | 5.16    | 0.40               | 1.90                    | ± 13.1 %    |
| 5300                 | 48.9                               | 5.42                            | 4.92    | 4.92    | 4.92    | 0.40               | 1.90                    | ± 13.1 %    |
| 5500                 | 48.6                               | 5.65                            | 4.64    | 4.64    | 4.64    | 0.40               | 1.90                    | ± 13.1 %    |
| 5600                 | 48.5                               | 5.77                            | 4.62    | 4.62    | 4.62    | 0.35               | 1.90                    | ± 13.1 %    |
| 5800                 | 48.2                               | 6.00                            | 4.74    | 4.74    | 4.74    | 0.45               | 1.90                    | ± 13.1 %    |

<sup>C</sup> Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.


## Frequency Response of E-Field (TEM-Cell:ifi110 EXX, Waveguide: R22)

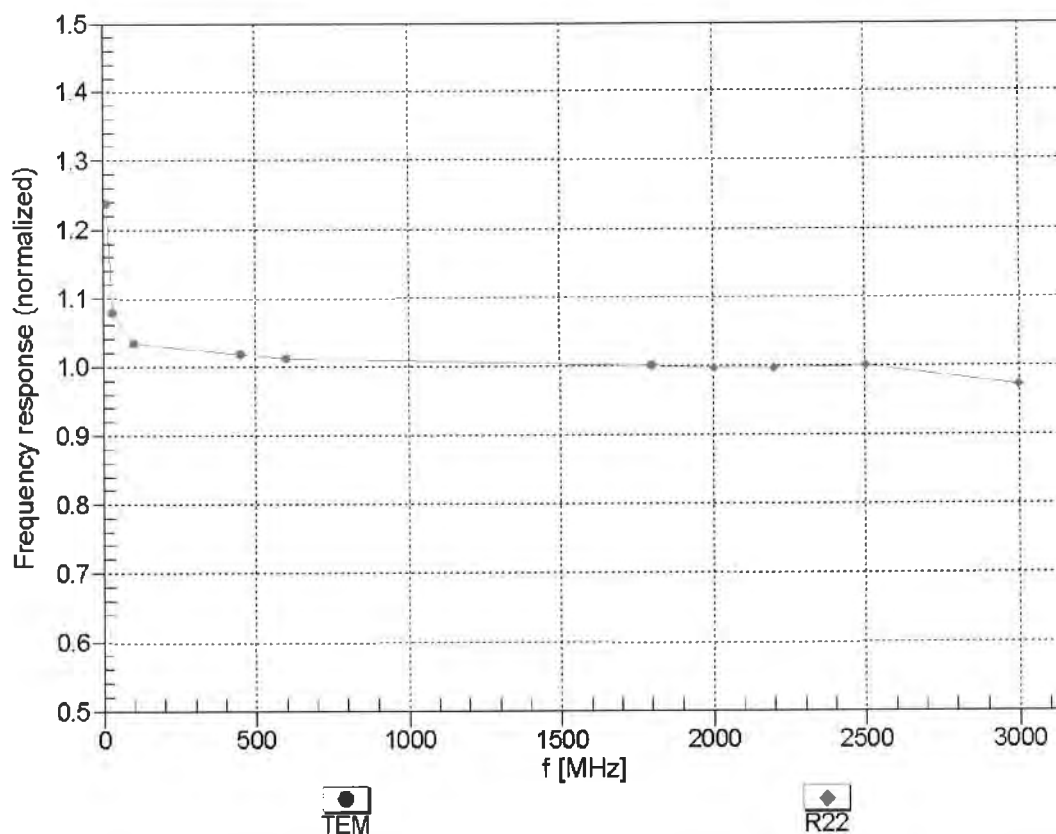



Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  ( $k=2$ )

## Receiving Pattern ( $\phi$ ), $\theta = 0^\circ$

f=600 MHz,TEM


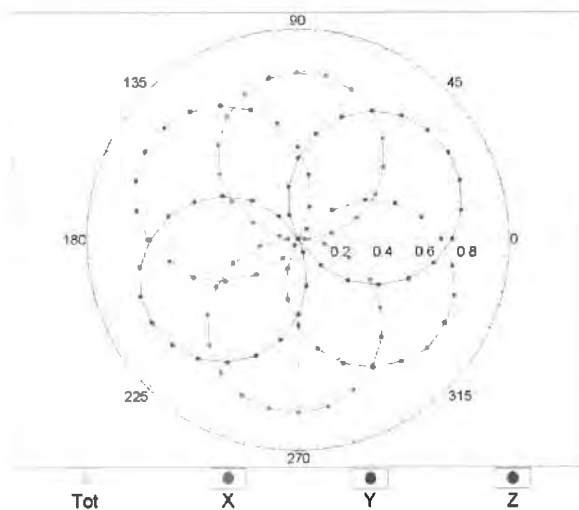


f=1800 MHz,R22

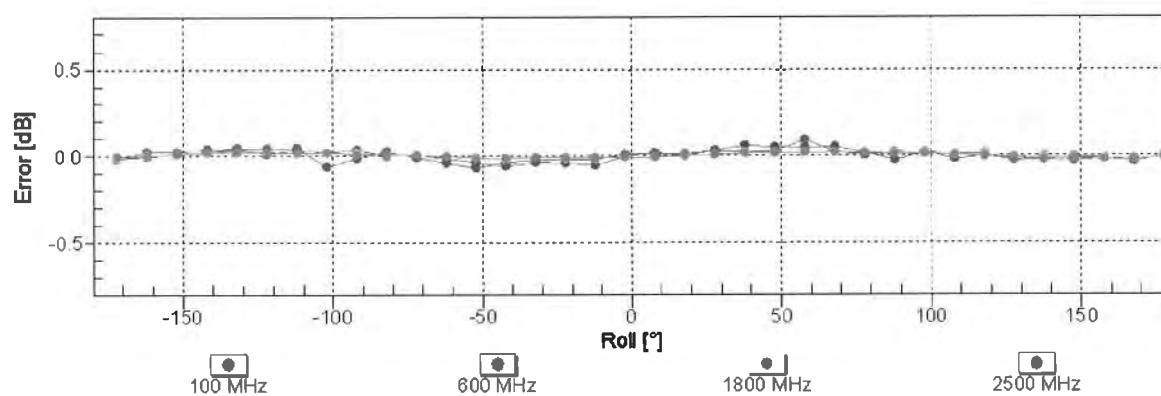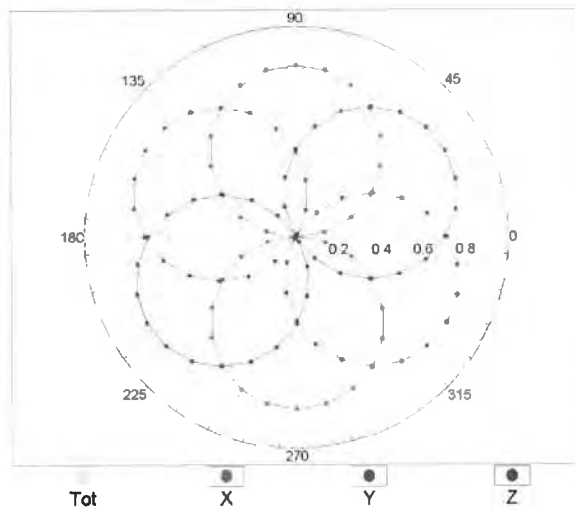


Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  ( $k=2$ )

## Dynamic Range $f(\text{SAR}_{\text{head}})$ (TEM cell , $f_{\text{eval}} = 1900 \text{ MHz}$ )

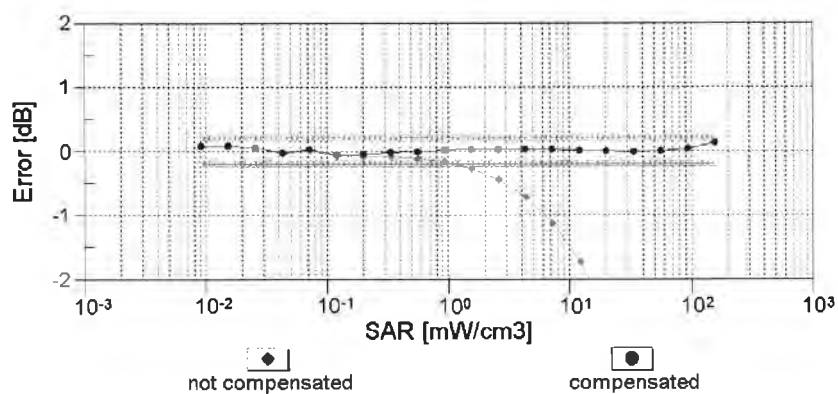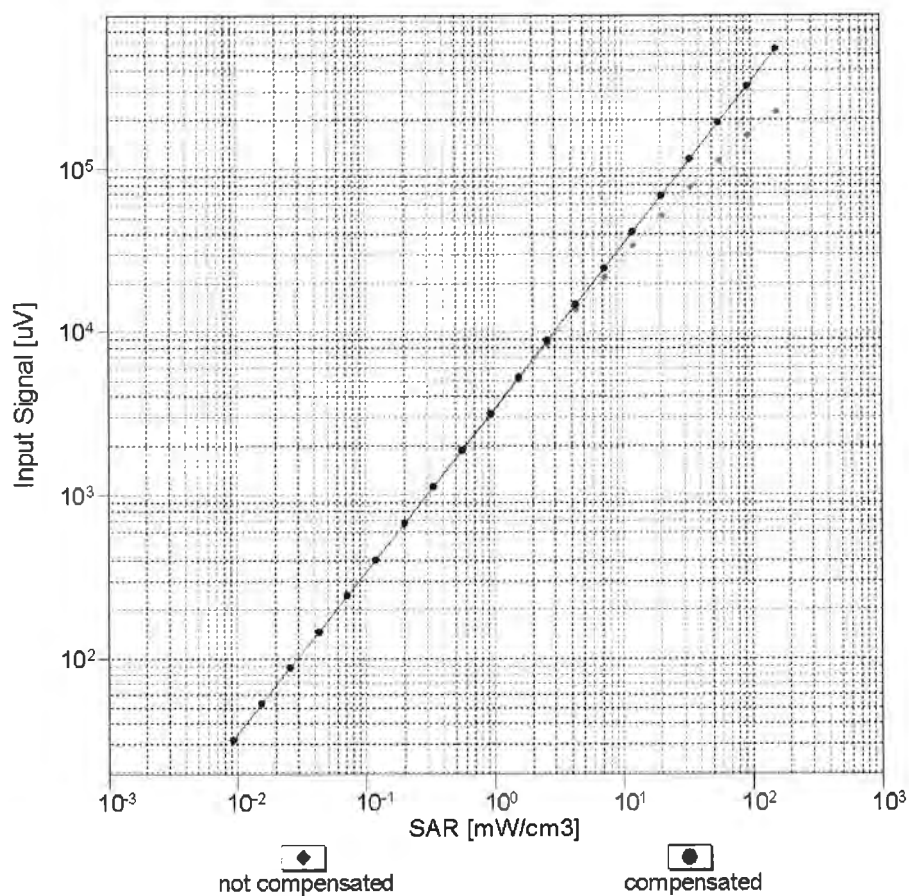


Uncertainty of Linearity Assessment:  $\pm 0.6\%$  ( $k=2$ )

## Conversion Factor Assessment

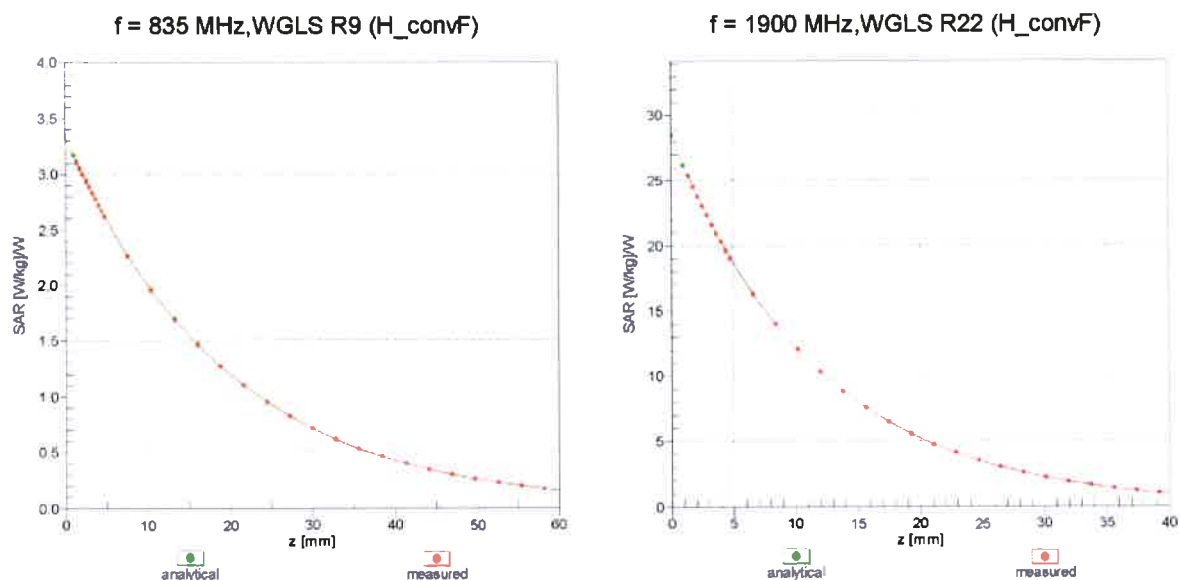

## Deviation from Isotropy in Liquid

Error ( $\phi, \theta$ ),  $f = 900 \text{ MHz}$

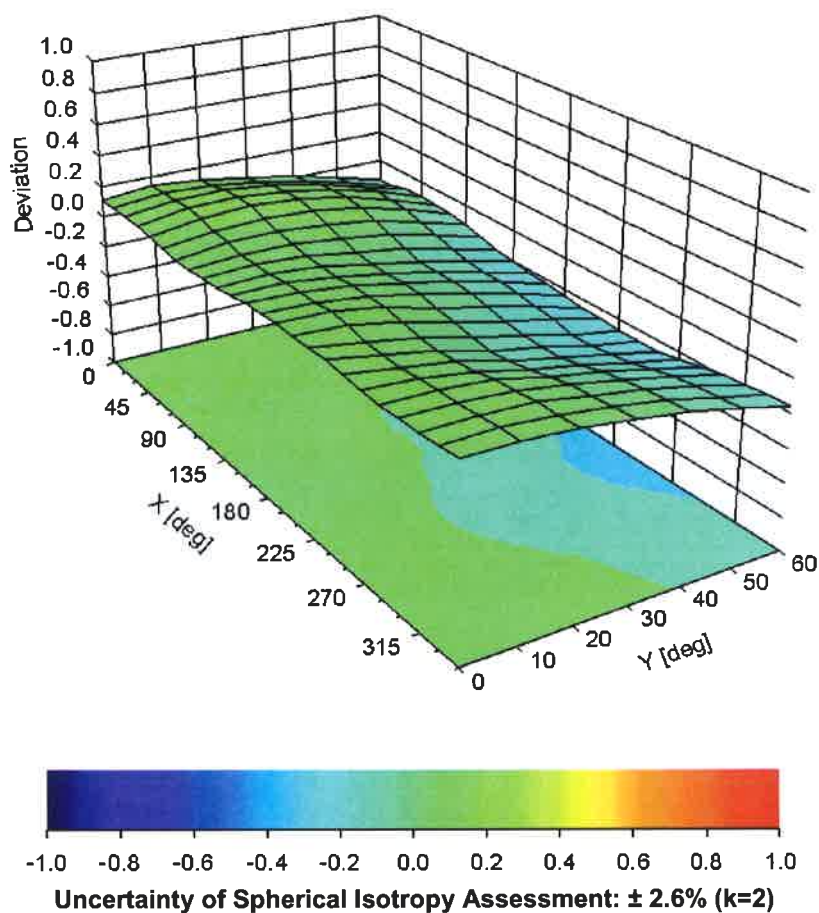

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:3590

### Other Probe Parameters

|                                               |            |
|-----------------------------------------------|------------|
| Sensor Arrangement                            | Triangular |
| Connector Angle (°)                           | -142.1     |
| Mechanical Surface Detection Mode             | enabled    |
| Optical Surface Detection Mode                | disabled   |
| Probe Overall Length                          | 337 mm     |
| Probe Body Diameter                           | 10 mm      |
| Tip Length                                    | 9 mm       |
| Tip Diameter                                  | 2.5 mm     |
| Probe Tip to Sensor X Calibration Point       | 1 mm       |
| Probe Tip to Sensor Y Calibration Point       | 1 mm       |
| Probe Tip to Sensor Z Calibration Point       | 1 mm       |
| Recommended Measurement Distance from Surface | 2 mm       |



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Client **Auden**

Certificate No: **EX3-3820\_May14**

## CALIBRATION CERTIFICATE

Object **EX3DV4 - SN:3820**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-14.v4, QA CAL-23.v5, QA CAL-25.v6**  
**Calibration procedure for dosimetric E-field probes**

Calibration date: **May 15, 2014**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature ( $22 \pm 3$ )°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards          | ID              | Cal Date (Certificate No.)        | Scheduled Calibration  |
|----------------------------|-----------------|-----------------------------------|------------------------|
| Power meter E4419B         | GB41293874      | 03-Apr-14 (No. 217-01911)         | Apr-15                 |
| Power sensor E4412A        | MY41498087      | 03-Apr-14 (No. 217-01911)         | Apr-15                 |
| Reference 3 dB Attenuator  | SN: S5054 (3c)  | 03-Apr-14 (No. 217-01915)         | Apr-15                 |
| Reference 20 dB Attenuator | SN: S5277 (20x) | 03-Apr-14 (No. 217-01919)         | Apr-15                 |
| Reference 30 dB Attenuator | SN: S5129 (30b) | 03-Apr-14 (No. 217-01920)         | Apr-15                 |
| Reference Probe ES3DV2     | SN: 3013        | 30-Dec-13 (No. ES3-3013_Dec13)    | Dec-14                 |
| DAE4                       | SN: 660         | 13-Dec-13 (No. DAE4-660_Dec13)    | Dec-14                 |
| Secondary Standards        | ID              | Check Date (in house)             | Scheduled Check        |
| RF generator HP 8648C      | US3642U01700    | 4-Aug-99 (in house check Apr-13)  | In house check: Apr-16 |
| Network Analyzer HP 8753E  | US37390585      | 18-Oct-01 (in house check Oct-13) | In house check: Oct-14 |

|                                                                                                                 |                                |                                          |                                                                                                    |
|-----------------------------------------------------------------------------------------------------------------|--------------------------------|------------------------------------------|----------------------------------------------------------------------------------------------------|
| Calibrated by:                                                                                                  | Name<br><b>Claudio Leubler</b> | Function<br><b>Laboratory Technician</b> | Signature<br> |
| Approved by:                                                                                                    | <b>Katja Pokovic</b>           | <b>Technical Manager</b>                 |               |
| This calibration certificate shall not be reproduced except in full without written approval of the laboratory. |                                |                                          | Issued: May 17, 2014                                                                               |



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

### Glossary:

|                          |                                                                                                                                                         |
|--------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| TSL                      | tissue simulating liquid                                                                                                                                |
| NORM <sub>x,y,z</sub>    | sensitivity in free space                                                                                                                               |
| ConvF                    | sensitivity in TSL / NORM <sub>x,y,z</sub>                                                                                                              |
| DCP                      | diode compression point                                                                                                                                 |
| CF                       | crest factor (1/duty_cycle) of the RF signal                                                                                                            |
| A, B, C, D               | modulation dependent linearization parameters                                                                                                           |
| Polarization $\varphi$   | $\varphi$ rotation around probe axis                                                                                                                    |
| Polarization $\vartheta$ | $\vartheta$ rotation around an axis that is in the plane normal to probe axis (at measurement center),<br>i.e., $\vartheta = 0$ is normal to probe axis |
| Connector Angle          | information used in DASY system to align probe sensor X to the robot coordinate system                                                                  |

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

### Methods Applied and Interpretation of Parameters:

- NORM<sub>x,y,z</sub>**: Assessed for E-field polarization  $\vartheta = 0$  ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide). NORM<sub>x,y,z</sub> are only intermediate values, i.e., the uncertainties of NORM<sub>x,y,z</sub> does not affect the E<sup>2</sup>-field uncertainty inside TSL (see below ConvF).
- NORM(f)<sub>x,y,z</sub>** = NORM<sub>x,y,z</sub> \* frequency\_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP<sub>x,y,z</sub>**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A<sub>x,y,z</sub>; B<sub>x,y,z</sub>; C<sub>x,y,z</sub>; D<sub>x,y,z</sub>; VR<sub>x,y,z</sub>**: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800$  MHz) and inside waveguide using analytical field distributions based on power measurements for  $f > 800$  MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM<sub>x,y,z</sub> \* ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50$  MHz to  $\pm 100$  MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle**: The angle is assessed using the information gained by determining the NORM<sub>x</sub> (no uncertainty required).

# Probe EX3DV4

## SN:3820

|               |                   |
|---------------|-------------------|
| Manufactured: | September 2, 2011 |
| Repaired:     | April 28, 2014    |
| Calibrated:   | May 15, 2014      |

Calibrated for DASY/EASY Systems  
(Note: non-compatible with DASY2 system!)

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:3820

### Basic Calibration Parameters

|                                                           | Sensor X | Sensor Y | Sensor Z | Unc (k=2) |
|-----------------------------------------------------------|----------|----------|----------|-----------|
| Norm ( $\mu\text{V}/(\text{V}/\text{m})^2$ ) <sup>A</sup> | 0.41     | 0.48     | 0.51     | ± 10.1 %  |
| DCP (mV) <sup>B</sup>                                     | 101.9    | 94.0     | 97.6     |           |

### Modulation Calibration Parameters

| UID | Communication System Name |   | A<br>dB | B<br>dB/ $\sqrt{\mu\text{V}}$ | C   | D<br>dB | VR<br>mV | Unc <sup>E</sup><br>(k=2) |
|-----|---------------------------|---|---------|-------------------------------|-----|---------|----------|---------------------------|
| 0   | CW                        | X | 0.0     | 0.0                           | 1.0 | 0.00    | 144.8    | ±3.5 %                    |
|     |                           | Y | 0.0     | 0.0                           | 1.0 |         | 131.9    |                           |
|     |                           | Z | 0.0     | 0.0                           | 1.0 |         | 142.9    |                           |

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

<sup>A</sup> The uncertainties of NormX,Y,Z do not affect the E<sup>2</sup>-field uncertainty inside TSL (see Pages 5 and 6).

<sup>B</sup> Numerical linearization parameter: uncertainty not required.

<sup>E</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:3820

### Calibration Parameter Determined in Head Tissue Simulating Media

| f (MHz) <sup>C</sup> | Relative Permittivity <sup>F</sup> | Conductivity (S/m) <sup>F</sup> | ConvF X | ConvF Y | ConvF Z | Alpha <sup>G</sup> | Depth <sup>G</sup> (mm) | Unct. (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-------------|
| 750                  | 41.9                               | 0.89                            | 9.55    | 9.55    | 9.55    | 0.41               | 0.88                    | ± 12.0 %    |
| 835                  | 41.5                               | 0.90                            | 9.22    | 9.22    | 9.22    | 0.30               | 1.08                    | ± 12.0 %    |
| 900                  | 41.5                               | 0.97                            | 9.23    | 9.23    | 9.23    | 0.47               | 0.78                    | ± 12.0 %    |
| 1450                 | 40.5                               | 1.20                            | 8.49    | 8.49    | 8.49    | 0.27               | 1.21                    | ± 12.0 %    |
| 1750                 | 40.1                               | 1.37                            | 8.26    | 8.26    | 8.26    | 0.80               | 0.59                    | ± 12.0 %    |
| 1900                 | 40.0                               | 1.40                            | 7.73    | 7.73    | 7.73    | 0.58               | 0.68                    | ± 12.0 %    |
| 2100                 | 39.8                               | 1.49                            | 7.71    | 7.71    | 7.71    | 0.75               | 0.58                    | ± 12.0 %    |
| 2450                 | 39.2                               | 1.80                            | 6.85    | 6.85    | 6.85    | 0.41               | 0.85                    | ± 12.0 %    |
| 2600                 | 39.0                               | 1.96                            | 6.73    | 6.73    | 6.73    | 0.40               | 0.85                    | ± 12.0 %    |
| 5200                 | 36.0                               | 4.66                            | 4.94    | 4.94    | 4.94    | 0.35               | 1.80                    | ± 13.1 %    |
| 5300                 | 35.9                               | 4.76                            | 4.66    | 4.66    | 4.66    | 0.35               | 1.80                    | ± 13.1 %    |
| 5500                 | 35.6                               | 4.96                            | 4.70    | 4.70    | 4.70    | 0.35               | 1.80                    | ± 13.1 %    |
| 5600                 | 35.5                               | 5.07                            | 4.47    | 4.47    | 4.47    | 0.35               | 1.80                    | ± 13.1 %    |
| 5800                 | 35.3                               | 5.27                            | 4.29    | 4.29    | 4.29    | 0.40               | 1.80                    | ± 13.1 %    |

<sup>C</sup> Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. Above 5 GHz frequency validity can be extended to ± 110 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:3820

### Calibration Parameter Determined in Body Tissue Simulating Media


| f (MHz) <sup>C</sup> | Relative Permittivity <sup>F</sup> | Conductivity (S/m) <sup>F</sup> | ConvF X | ConvF Y | ConvF Z | Alpha <sup>G</sup> | Depth <sup>G</sup> (mm) | Unct. (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-------------|
| 750                  | 55.5                               | 0.96                            | 9.12    | 9.12    | 9.12    | 0.42               | 0.92                    | ± 12.0 %    |
| 835                  | 55.2                               | 0.97                            | 9.01    | 9.01    | 9.01    | 0.37               | 0.97                    | ± 12.0 %    |
| 900                  | 55.0                               | 1.05                            | 8.83    | 8.83    | 8.83    | 0.59               | 0.73                    | ± 12.0 %    |
| 1450                 | 54.0                               | 1.30                            | 7.88    | 7.88    | 7.88    | 0.58               | 0.73                    | ± 12.0 %    |
| 1750                 | 53.4                               | 1.49                            | 7.48    | 7.48    | 7.48    | 0.80               | 0.61                    | ± 12.0 %    |
| 1900                 | 53.3                               | 1.52                            | 7.23    | 7.23    | 7.23    | 0.63               | 0.70                    | ± 12.0 %    |
| 2100                 | 53.2                               | 1.62                            | 7.54    | 7.54    | 7.54    | 0.53               | 0.75                    | ± 12.0 %    |
| 2450                 | 52.7                               | 1.95                            | 6.87    | 6.87    | 6.87    | 0.80               | 0.58                    | ± 12.0 %    |
| 2600                 | 52.5                               | 2.16                            | 6.63    | 6.63    | 6.63    | 0.80               | 0.50                    | ± 12.0 %    |
| 5200                 | 49.0                               | 5.30                            | 4.44    | 4.44    | 4.44    | 0.40               | 1.90                    | ± 13.1 %    |
| 5300                 | 48.9                               | 5.42                            | 4.25    | 4.25    | 4.25    | 0.40               | 1.90                    | ± 13.1 %    |
| 5500                 | 48.6                               | 5.65                            | 3.99    | 3.99    | 3.99    | 0.45               | 1.90                    | ± 13.1 %    |
| 5600                 | 48.5                               | 5.77                            | 3.83    | 3.83    | 3.83    | 0.45               | 1.90                    | ± 13.1 %    |
| 5800                 | 48.2                               | 6.00                            | 4.00    | 4.00    | 4.00    | 0.50               | 1.90                    | ± 13.1 %    |

<sup>C</sup> Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. Above 5 GHz frequency validity can be extended to ± 110 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.


**Frequency Response of E-Field**  
(TEM-Cell:ifi110 EXX, Waveguide: R22)

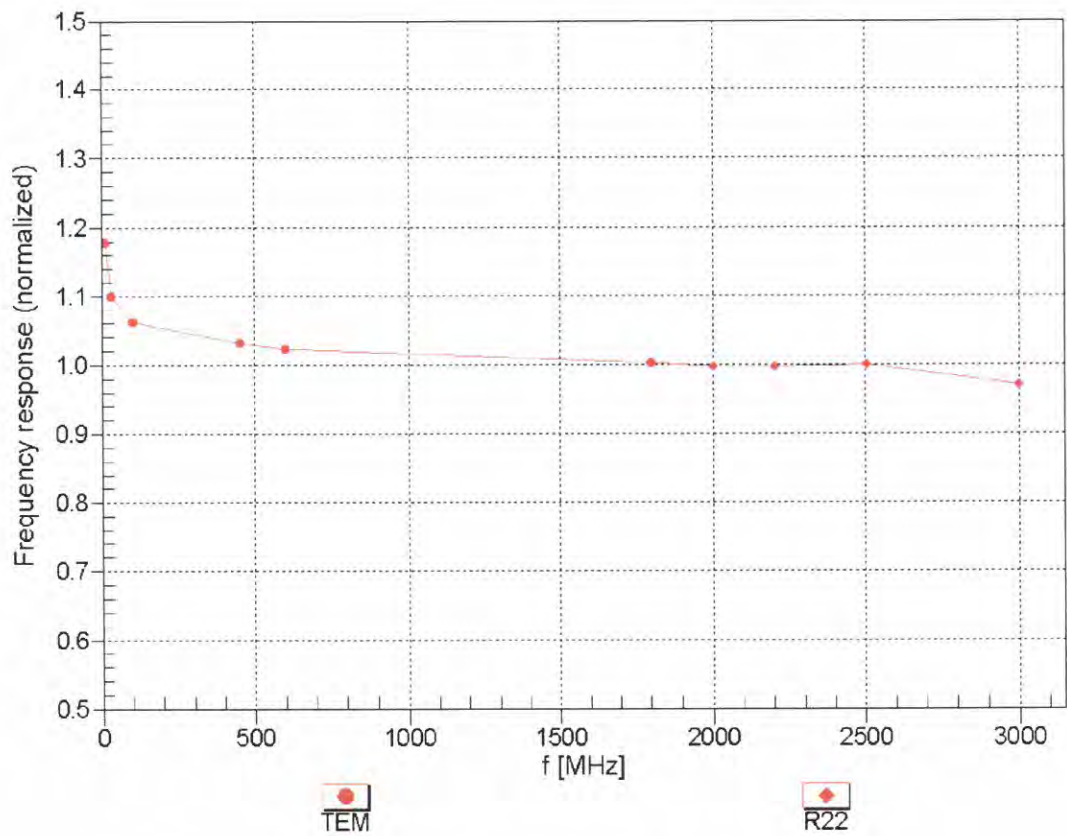



Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  (k=2)

## Receiving Pattern ( $\phi$ ), $\vartheta = 0^\circ$

f=600 MHz,TEM


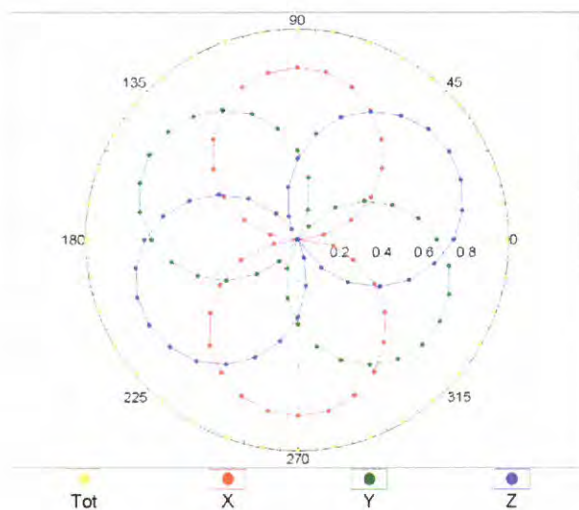


f=1800 MHz,R22

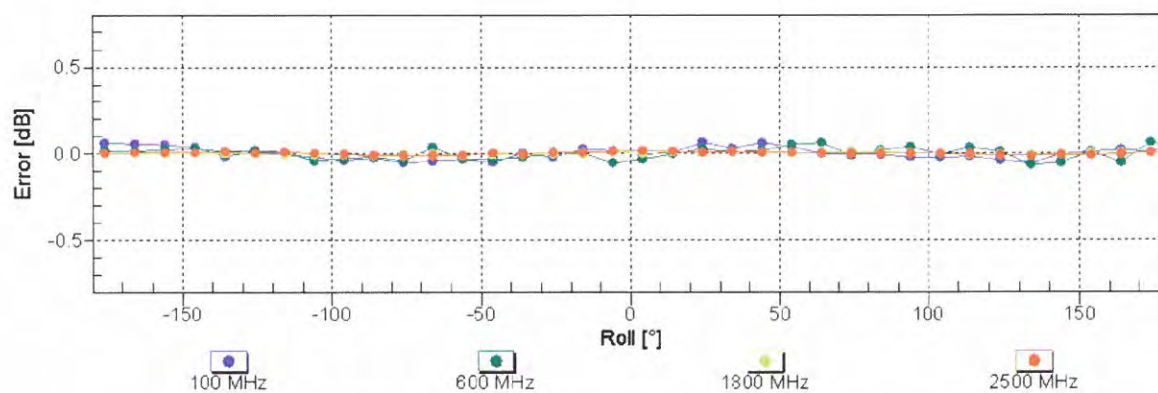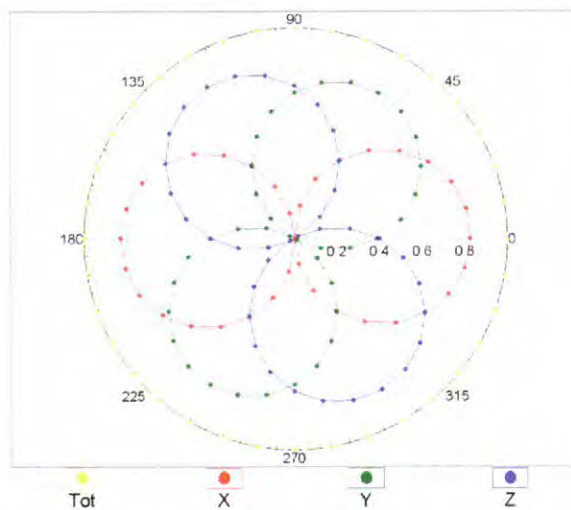


Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  ( $k=2$ )

Dynamic Range f(SAR<sub>head</sub>)  
(TEM cell , f<sub>eval</sub>= 1900 MHz)

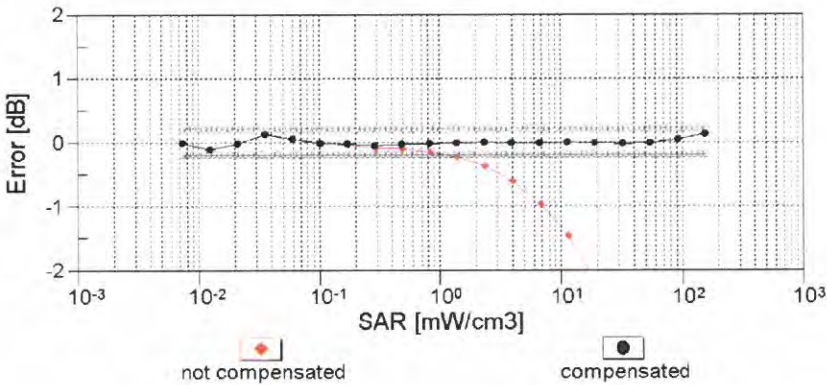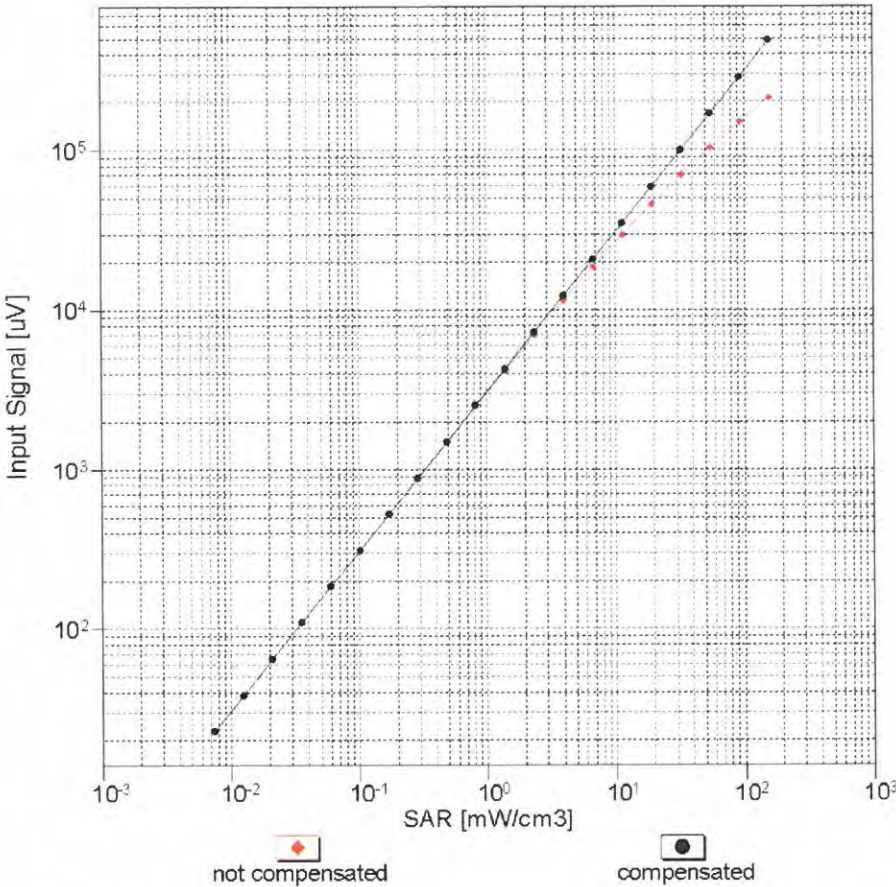


Uncertainty of Linearity Assessment: ± 0.6% (k=2)

# Conversion Factor Assessment

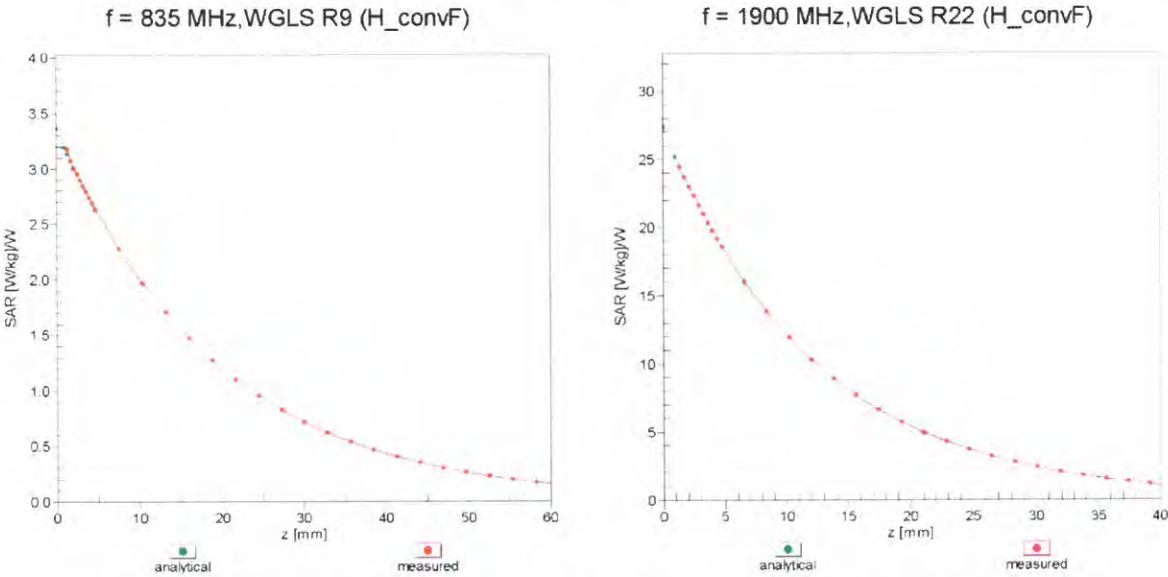

## Deviation from Isotropy in Liquid Error ( $\phi, \vartheta$ ), f = 900 MHz

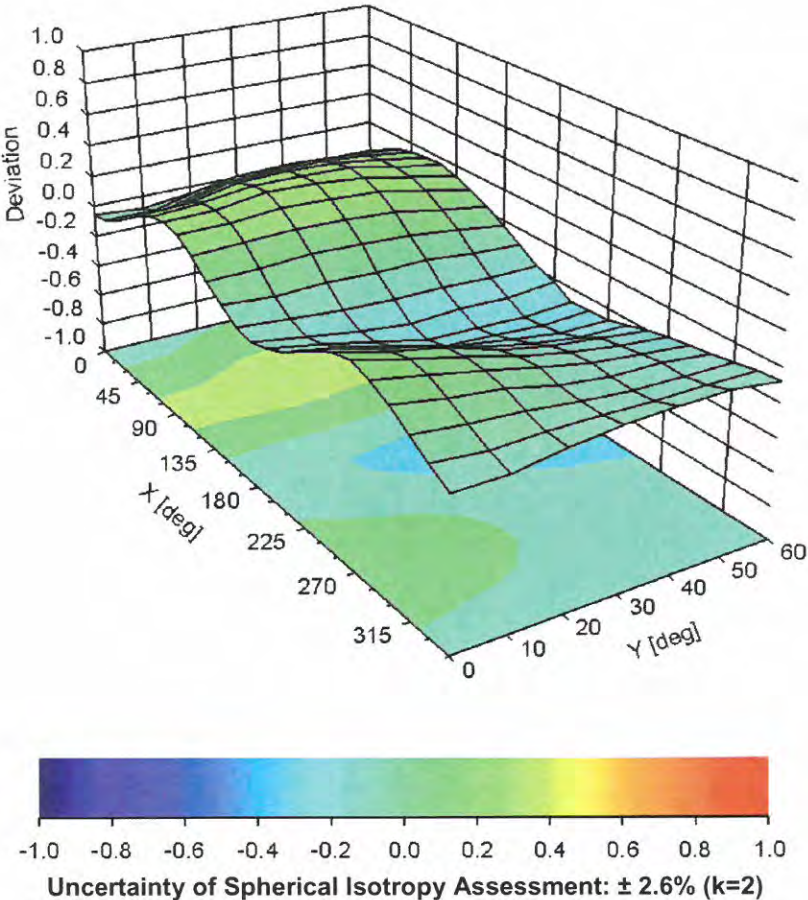

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:3820

### Other Probe Parameters

|                                               |            |
|-----------------------------------------------|------------|
| Sensor Arrangement                            | Triangular |
| Connector Angle (°)                           | -56        |
| Mechanical Surface Detection Mode             | enabled    |
| Optical Surface Detection Mode                | disabled   |
| Probe Overall Length                          | 337 mm     |
| Probe Body Diameter                           | 10 mm      |
| Tip Length                                    | 9 mm       |
| Tip Diameter                                  | 2.5 mm     |
| Probe Tip to Sensor X Calibration Point       | 1 mm       |
| Probe Tip to Sensor Y Calibration Point       | 1 mm       |
| Probe Tip to Sensor Z Calibration Point       | 1 mm       |
| Recommended Measurement Distance from Surface | 2 mm       |



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Client **B.V. ADT (Auden)**

Certificate No: **EX3-3971\_Mar14**

## CALIBRATION CERTIFICATE

Object **EX3DV4 - SN:3971**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-14.v4, QA CAL-23.v5, QA CAL-25.v6**  
**Calibration procedure for dosimetric E-field probes**

Calibration date: **March 31, 2014**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature ( $22 \pm 3$ )°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards          | ID              | Cal Date (Certificate No.)        | Scheduled Calibration  |
|----------------------------|-----------------|-----------------------------------|------------------------|
| Power meter E4419B         | GB41293874      | 04-Apr-13 (No. 217-01733)         | Apr-14                 |
| Power sensor E4412A        | MY41498087      | 04-Apr-13 (No. 217-01733)         | Apr-14                 |
| Reference 3 dB Attenuator  | SN: S5054 (3c)  | 04-Apr-13 (No. 217-01737)         | Apr-14                 |
| Reference 20 dB Attenuator | SN: S5277 (20x) | 04-Apr-13 (No. 217-01735)         | Apr-14                 |
| Reference 30 dB Attenuator | SN: S5129 (30b) | 04-Apr-13 (No. 217-01738)         | Apr-14                 |
| Reference Probe ES3DV2     | SN: 3013        | 30-Dec-13 (No. ES3-3013_Dec13)    | Dec-14                 |
| DAE4                       | SN: 660         | 13-Dec-13 (No. DAE4-660_Dec13)    | Dec-14                 |
| Secondary Standards        | ID              | Check Date (in house)             | Scheduled Check        |
| RF generator HP 8648C      | US3642U01700    | 4-Aug-99 (in house check Apr-13)  | In house check: Apr-16 |
| Network Analyzer HP 8753E  | US37390585      | 18-Oct-01 (in house check Oct-13) | In house check: Oct-14 |

|                                                                                                                 | Name                  | Function                     | Signature                                                                             |
|-----------------------------------------------------------------------------------------------------------------|-----------------------|------------------------------|---------------------------------------------------------------------------------------|
| Calibrated by:                                                                                                  | <b>Jeton Kastrati</b> | <b>Laboratory Technician</b> |  |
| Approved by:                                                                                                    | <b>Katja Pokovic</b>  | <b>Technical Manager</b>     |  |
| Issued: April 1, 2014                                                                                           |                       |                              |                                                                                       |
| This calibration certificate shall not be reproduced except in full without written approval of the laboratory. |                       |                              |                                                                                       |



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

## Glossary:

|                          |                                                                                                                                                         |
|--------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| TSL                      | tissue simulating liquid                                                                                                                                |
| NORM <sub>x,y,z</sub>    | sensitivity in free space                                                                                                                               |
| ConvF                    | sensitivity in TSL / NORM <sub>x,y,z</sub>                                                                                                              |
| DCP                      | diode compression point                                                                                                                                 |
| CF                       | crest factor (1/duty_cycle) of the RF signal                                                                                                            |
| A, B, C, D               | modulation dependent linearization parameters                                                                                                           |
| Polarization $\varphi$   | $\varphi$ rotation around probe axis                                                                                                                    |
| Polarization $\vartheta$ | $\vartheta$ rotation around an axis that is in the plane normal to probe axis (at measurement center),<br>i.e., $\vartheta = 0$ is normal to probe axis |
| Connector Angle          | information used in DASY system to align probe sensor X to the robot coordinate system                                                                  |

## Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

## Methods Applied and Interpretation of Parameters:

- NORM<sub>x,y,z</sub>**: Assessed for E-field polarization  $\vartheta = 0$  ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide). NORM<sub>x,y,z</sub> are only intermediate values, i.e., the uncertainties of NORM<sub>x,y,z</sub> does not affect the  $E^2$ -field uncertainty inside TSL (see below *ConvF*).
- NORM(f)<sub>x,y,z</sub>** = NORM<sub>x,y,z</sub> \* frequency\_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConvF*.
- DCP<sub>x,y,z</sub>**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A<sub>x,y,z</sub>; B<sub>x,y,z</sub>; C<sub>x,y,z</sub>; D<sub>x,y,z</sub>; VR<sub>x,y,z</sub>; A, B, C, D** are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800$  MHz) and inside waveguide using analytical field distributions based on power measurements for  $f > 800$  MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM<sub>x,y,z</sub> \* ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50$  MHz to  $\pm 100$  MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle**: The angle is assessed using the information gained by determining the NORM<sub>x</sub> (no uncertainty required).

# Probe EX3DV4

## SN:3971

Manufactured: December 30, 2013  
Calibrated: March 31, 2014

Calibrated for DASY/EASY Systems  
(Note: non-compatible with DASY2 system!)

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:3971

### Basic Calibration Parameters

|                                                           | Sensor X | Sensor Y | Sensor Z | Unc (k=2)     |
|-----------------------------------------------------------|----------|----------|----------|---------------|
| Norm ( $\mu\text{V}/(\text{V}/\text{m})^2$ ) <sup>A</sup> | 0.41     | 0.53     | 0.50     | $\pm 10.1 \%$ |
| DCP (mV) <sup>B</sup>                                     | 99.1     | 98.1     | 98.6     |               |

### Modulation Calibration Parameters

| UID | Communication System Name |   | A<br>dB | B<br>dB $\sqrt{\mu\text{V}}$ | C   | D<br>dB | VR<br>mV | Unc <sup>E</sup><br>(k=2) |
|-----|---------------------------|---|---------|------------------------------|-----|---------|----------|---------------------------|
| 0   | CW                        | X | 0.0     | 0.0                          | 1.0 | 0.00    | 140.6    | $\pm 3.3 \%$              |
|     |                           | Y | 0.0     | 0.0                          | 1.0 |         | 143.4    |                           |
|     |                           | Z | 0.0     | 0.0                          | 1.0 |         | 149.6    |                           |

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

<sup>A</sup> The uncertainties of NormX,Y,Z do not affect the  $E^2$ -field uncertainty inside TSL (see Pages 5 and 6).

<sup>B</sup> Numerical linearization parameter: uncertainty not required.

<sup>E</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:3971

### Calibration Parameter Determined in Head Tissue Simulating Media

| f (MHz) <sup>C</sup> | Relative Permittivity <sup>F</sup> | Conductivity (S/m) <sup>F</sup> | ConvF X | ConvF Y | ConvF Z | Alpha <sup>G</sup> | Depth <sup>G</sup> (mm) | Unct. (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-------------|
| 750                  | 41.9                               | 0.89                            | 10.30   | 10.30   | 10.30   | 0.37               | 0.95                    | ± 12.0 %    |
| 835                  | 41.5                               | 0.90                            | 10.00   | 10.00   | 10.00   | 0.45               | 0.79                    | ± 12.0 %    |
| 900                  | 41.5                               | 0.97                            | 9.66    | 9.66    | 9.66    | 0.23               | 1.21                    | ± 12.0 %    |
| 900                  | 41.5                               | 0.97                            | 9.82    | 9.82    | 9.82    | 0.34               | 0.93                    | ± 12.0 %    |
| 1450                 | 40.5                               | 1.20                            | 8.84    | 8.84    | 8.84    | 0.27               | 1.12                    | ± 12.0 %    |
| 1640                 | 40.3                               | 1.29                            | 8.44    | 8.44    | 8.44    | 0.80               | 0.50                    | ± 12.0 %    |
| 1750                 | 40.1                               | 1.37                            | 8.40    | 8.40    | 8.40    | 0.32               | 0.91                    | ± 12.0 %    |
| 1810                 | 40.0                               | 1.40                            | 8.21    | 8.21    | 8.21    | 0.56               | 0.71                    | ± 12.0 %    |
| 1900                 | 40.0                               | 1.40                            | 8.19    | 8.19    | 8.19    | 0.31               | 0.91                    | ± 12.0 %    |
| 2000                 | 40.0                               | 1.40                            | 8.19    | 8.19    | 8.19    | 0.55               | 0.66                    | ± 12.0 %    |
| 2300                 | 39.5                               | 1.67                            | 7.77    | 7.77    | 7.77    | 0.61               | 0.64                    | ± 12.0 %    |
| 2450                 | 39.2                               | 1.80                            | 7.43    | 7.43    | 7.43    | 0.39               | 0.83                    | ± 12.0 %    |
| 2600                 | 39.0                               | 1.96                            | 7.15    | 7.15    | 7.15    | 0.37               | 0.87                    | ± 12.0 %    |
| 3500                 | 37.9                               | 2.91                            | 6.87    | 6.87    | 6.87    | 0.50               | 0.93                    | ± 13.1 %    |
| 5200                 | 36.0                               | 4.66                            | 5.22    | 5.22    | 5.22    | 0.30               | 1.80                    | ± 13.1 %    |
| 5300                 | 35.9                               | 4.76                            | 4.81    | 4.81    | 4.81    | 0.40               | 1.80                    | ± 13.1 %    |
| 5500                 | 35.6                               | 4.96                            | 4.93    | 4.93    | 4.93    | 0.40               | 1.80                    | ± 13.1 %    |
| 5600                 | 35.5                               | 5.07                            | 4.55    | 4.55    | 4.55    | 0.50               | 1.80                    | ± 13.1 %    |
| 5800                 | 35.3                               | 5.27                            | 4.53    | 4.53    | 4.53    | 0.50               | 1.80                    | ± 13.1 %    |

<sup>C</sup> Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:3971

### Calibration Parameter Determined in Body Tissue Simulating Media


| f (MHz) <sup>C</sup> | Relative Permittivity <sup>F</sup> | Conductivity (S/m) <sup>F</sup> | ConvF X | ConvF Y | ConvF Z | Alpha <sup>G</sup> | Depth <sup>G</sup> (mm) | Unct. (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-------------|
| 750                  | 55.5                               | 0.96                            | 9.91    | 9.91    | 9.91    | 0.49               | 0.81                    | ± 12.0 %    |
| 835                  | 55.2                               | 0.97                            | 9.74    | 9.74    | 9.74    | 0.56               | 0.73                    | ± 12.0 %    |
| 900                  | 55.0                               | 1.05                            | 9.53    | 9.53    | 9.53    | 0.67               | 0.67                    | ± 12.0 %    |
| 1450                 | 54.0                               | 1.30                            | 8.25    | 8.25    | 8.25    | 0.26               | 1.20                    | ± 12.0 %    |
| 1640                 | 53.8                               | 1.40                            | 8.36    | 8.36    | 8.36    | 0.30               | 1.01                    | ± 12.0 %    |
| 1750                 | 53.4                               | 1.49                            | 7.93    | 7.93    | 7.93    | 0.45               | 0.80                    | ± 12.0 %    |
| 1900                 | 53.3                               | 1.52                            | 7.68    | 7.68    | 7.68    | 0.37               | 0.90                    | ± 12.0 %    |
| 2000                 | 53.3                               | 1.52                            | 7.80    | 7.80    | 7.80    | 0.37               | 0.89                    | ± 12.0 %    |
| 2300                 | 52.9                               | 1.81                            | 7.51    | 7.51    | 7.51    | 0.68               | 0.65                    | ± 12.0 %    |
| 2450                 | 52.7                               | 1.95                            | 7.29    | 7.29    | 7.29    | 0.80               | 0.50                    | ± 12.0 %    |
| 2600                 | 52.5                               | 2.16                            | 6.99    | 6.99    | 6.99    | 0.80               | 0.50                    | ± 12.0 %    |
| 3500                 | 51.3                               | 3.31                            | 6.66    | 6.66    | 6.66    | 0.27               | 1.34                    | ± 13.1 %    |
| 5200                 | 49.0                               | 5.30                            | 4.59    | 4.59    | 4.59    | 0.40               | 1.90                    | ± 13.1 %    |
| 5300                 | 48.9                               | 5.42                            | 4.19    | 4.19    | 4.19    | 0.50               | 1.90                    | ± 13.1 %    |
| 5500                 | 48.6                               | 5.65                            | 4.14    | 4.14    | 4.14    | 0.45               | 1.90                    | ± 13.1 %    |
| 5600                 | 48.5                               | 5.77                            | 3.87    | 3.87    | 3.87    | 0.50               | 1.90                    | ± 13.1 %    |
| 5800                 | 48.2                               | 6.00                            | 4.12    | 4.12    | 4.12    | 0.50               | 1.90                    | ± 13.1 %    |

<sup>C</sup> Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.


**Frequency Response of E-Field**  
(TEM-Cell:ifi110 EXX, Waveguide: R22)

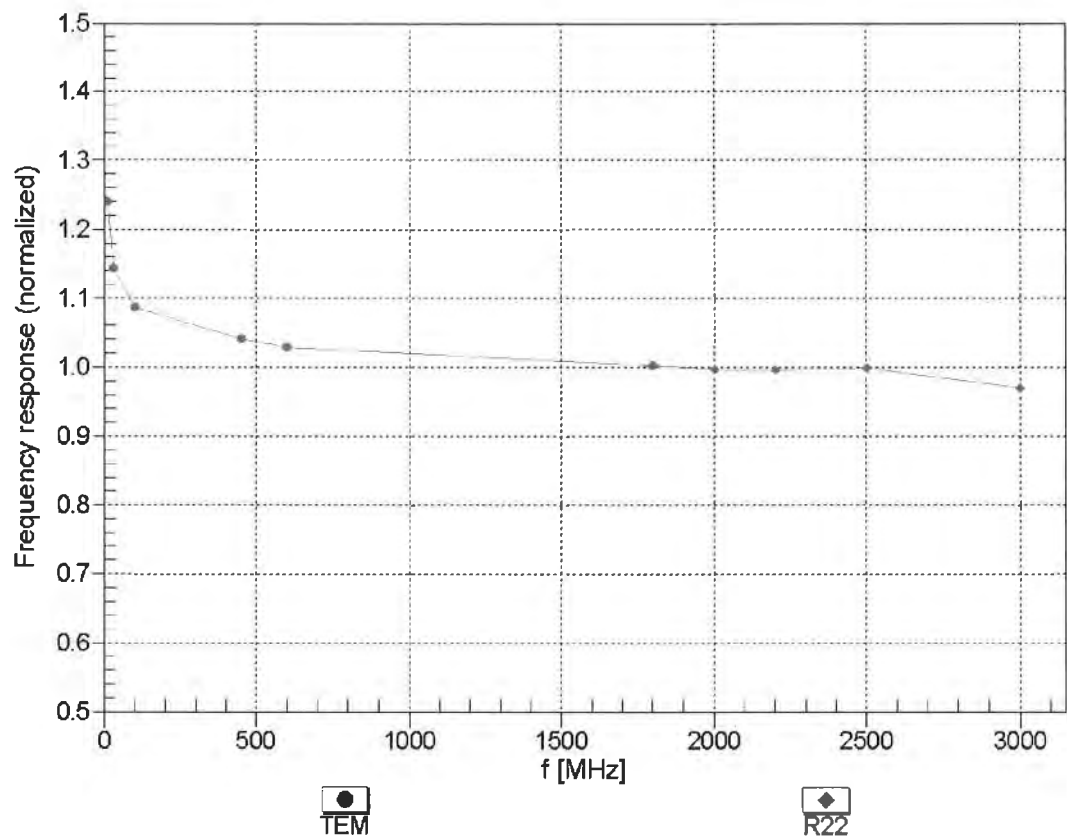



Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  (k=2)

## Receiving Pattern ( $\phi$ ), $\theta = 0^\circ$

f=600 MHz,TEM

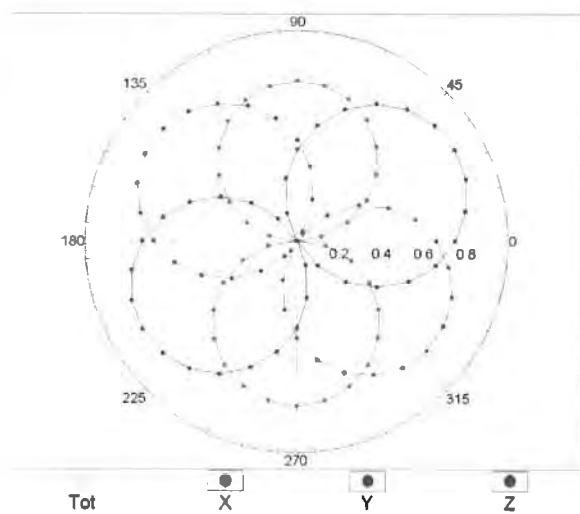


f=1800 MHz,R22

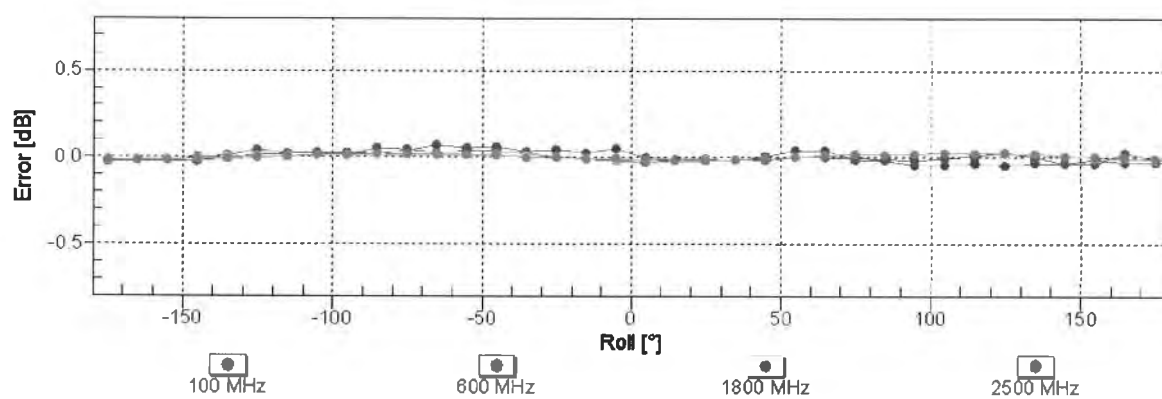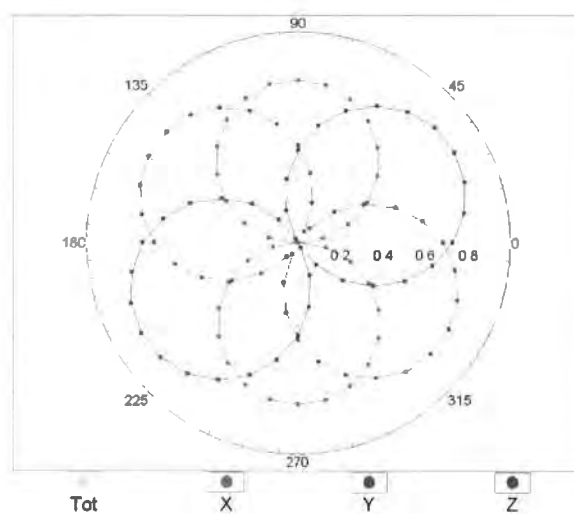


Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  ( $k=2$ )

## Dynamic Range $f(\text{SAR}_{\text{head}})$ (TEM cell, $f_{\text{eval}} = 1900 \text{ MHz}$ )

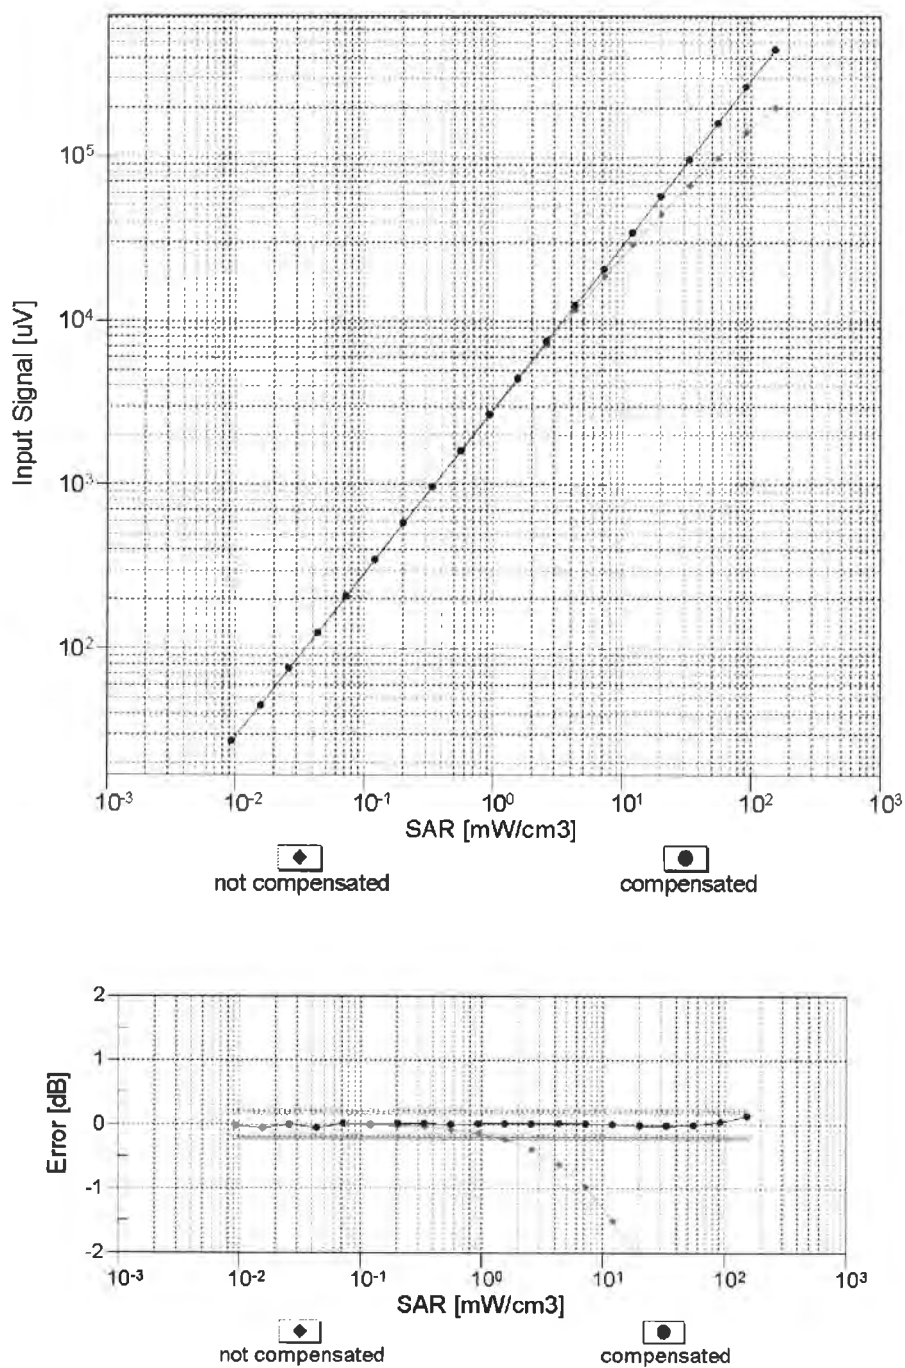


Uncertainty of Linearity Assessment:  $\pm 0.6\%$  ( $k=2$ )

## Conversion Factor Assessment

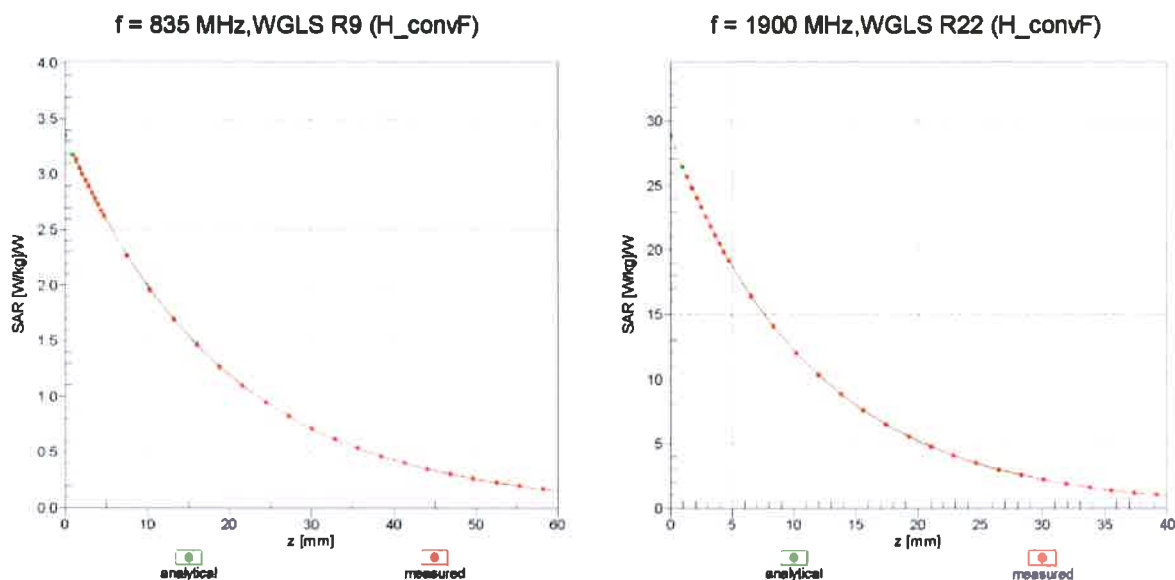

## Deviation from Isotropy in Liquid

Error ( $\phi, \theta$ ),  $f = 900 \text{ MHz}$

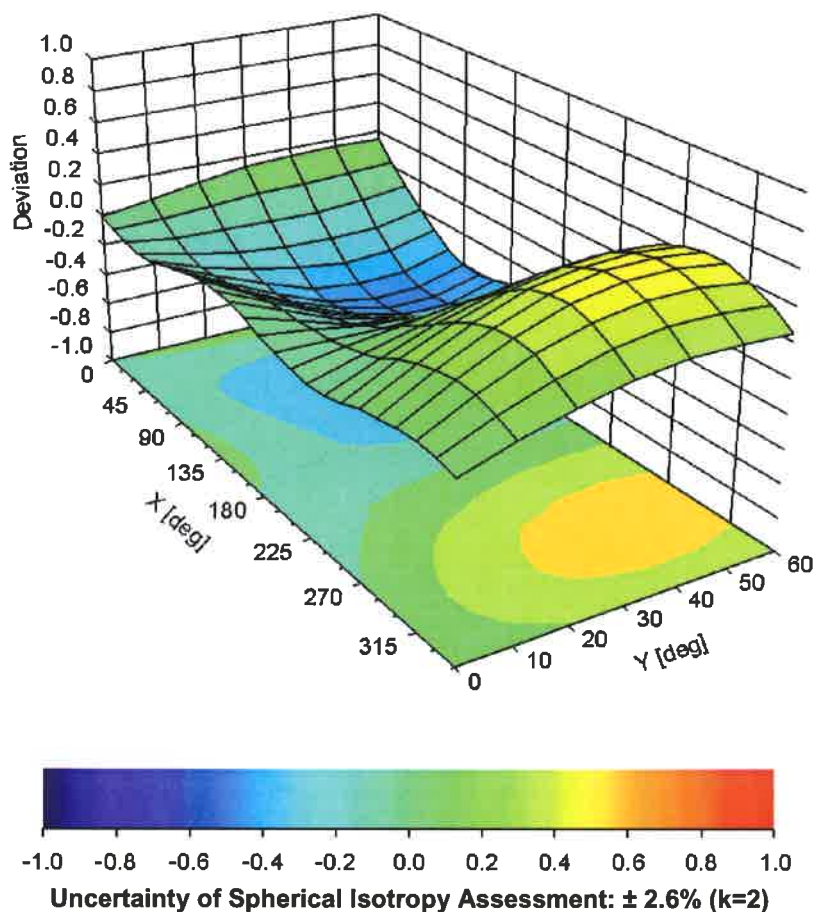

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:3971

### Other Probe Parameters

|                                               |            |
|-----------------------------------------------|------------|
| Sensor Arrangement                            | Triangular |
| Connector Angle (°)                           | -105.3     |
| Mechanical Surface Detection Mode             | enabled    |
| Optical Surface Detection Mode                | disabled   |
| Probe Overall Length                          | 337 mm     |
| Probe Body Diameter                           | 10 mm      |
| Tip Length                                    | 9 mm       |
| Tip Diameter                                  | 2.5 mm     |
| Probe Tip to Sensor X Calibration Point       | 1 mm       |
| Probe Tip to Sensor Y Calibration Point       | 1 mm       |
| Probe Tip to Sensor Z Calibration Point       | 1 mm       |
| Recommended Measurement Distance from Surface | 2 mm       |



## Appendix D. Photographs of EUT and Setup