



FCC Test Report

According to

47 CFR Part 22H, 24E

Equipment : EDA (Enterprise Digital Assistant)
Trade Name : Symbol
Model No. : MC5574
FCC ID : H9PMC5574
Tx Frequency Range : GSM850 : 824.2 ~ 848.8MHz
GSM1900 : 1850.2 ~1909.8 MHz
Max. ERP/EIRP Power : GSM850(GSM) : 0.51 W
GSM850(EDGE) : 0.16 W
GSM1900(GSM) : 1.98 W
GSM1900(EDGE) : 0.79 W
Emission Designator : GSM : 300KGXW
EDGE : 300KG7W
Applicant : Symbol Technologies Inc
One Symbol Plaza Holtsville, NY 11733-1300 United States

- The test result refers exclusively to the test presented test model / sample.
- Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.
- **Certificate or Test Report must not be used by the applicant to claim the product in this test report endorsement by NVLAP or any agency of U.S. government.**
- The data shown in this test report were carried out on Apr. 10, 2008 at **Sporton International Inc. LAB.**
- Report No.: FG840317, Report Version: Rev. 01.

Roy Wu
Manager

SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.



Table of Contents

History of This Test Report	ii
1. General Information	1
1.1 Applicant.....	1
1.2 Manufacturer	1
1.3 Basic Description of Equipment under Test.....	1
1.4 Feature of Equipment under Test.....	2
1.5 Report Date	2
2. Test Configuration of Equipment under Test	3
2.1 Test Manner	3
2.2 Test Mode	3
2.3 Connection Diagram of Test System	4
2.4 Ancillary Equipment List	4
3. General Information of Test Site.....	5
3.1 Test Voltage	5
3.2 Test Compliance.....	5
3.3 Frequency Range.....	5
3.4 Test Distance.....	5
4. Test Data and Test Result	6
4.1 List of Measurements and Examinations.....	6
4.2 RF Output Power.....	7
4.3 ERP / EIRP Measurement.....	8
4.4 Occupied Bandwidth and Band Edge Measurement	12
4.5 Conducted Emission.....	45
4.6 Field Strength of Spurious Radiation	64
4.7 Frequency Stability (Temperature Variation)	89
4.8 Frequency Stability (Voltage Variation)	92
5. List of Measurement Equipments.....	94
6. Uncertainty Evaluation	95
Appendix A - External Photographs of EUT	
Appendix B - Internal Photographs of EUT	
Appendix C - Setup Photographs	



History of This Test Report

Report Issue Date: Apr. 14, 2008

Report No.	Description



1. General Information

1.1 Applicant

Symbol Technologies Inc

One Symbol Plaza Holtsville, NY 11733-1300 United States

1.2 Manufacturer

ASKEY COMPUYER CORP

10F, No. 119, CHIENKANG RD., CHUNG-HO, TAIPEI, TAIWAN, 235, R.O.C

1.3 Basic Description of Equipment under Test

Equipment		EDA (Enterprise Digital Assistant)
Trade Name		Symbol
Model Name		MC5574
FCC ID		H9PMC5574
Sample A		1D scanner without camera
Sample B		2D scanner without camera
Sample C		1D scanner with camera
Sample D		2D scanner with camera
AC Adapter	Brand Name	DELTA
	Model Name	ADP-16GB
	Power Rating	I/P: 100-240Vac, 50-60Hz, 0.4A; O/P: 5.4Vdc, 3A
	AC Power Cord Type	AC: 1.8 meter non-shielded cable with ferrite core DC: 1.8 meter non-shielded cable without ferrite core
Battery	Brand Name	MOTOROLA
	Part Number	82-107172-01 Rev A
	Power Rating	3.7Vdc, 2400mAh
	Type	Li-ion
USB with Charging Cable	Brand Name	SYMBOL / MOTOROLA
	Part Number	25-108022-01R Rev. 1
	Signal Line Type	1.5 meter shielded cable without ferrite core

Remark: Above EUT's information was declared by manufacturer. Please refer to specifications of manufacturer or User's Manual for more detailed features description.

**1.4 Feature of Equipment under Test**

Product Feature & Specification	
DUT Type :	EDA (Enterprise Digital Assistant)
Trade Name :	Symbol
Model Name :	MC5574
FCC ID :	H9PMC5574
Tx Frequency :	GSM850 : 824 MHz ~ 849 MHz GSM1900 : 1850 MHz ~ 1910 MHz Bluetooth : 2400 MHz ~ 2483.5 MHz WLAN : 2400 MHz ~ 2483.5 MHz
Rx Frequency :	GSM850 : 869 MHz ~ 894 MHz GSM1900 : 1930 MHz ~ 1990 MHz Bluetooth : 2400 MHz ~ 2483.5 MHz WLAN : 2400 MHz ~ 2483.5 MHz
Maximum Output Power to Antenna :	GSM850 : 32.43 dBm (GSM) / 32.41 dBm (GPRS8) / 30.62 dBm (GPRS10) / 26.87 dBm (GPRS12) / 25.94 dBm (EGPRS8) / 23.83 dBm (EGPRS10) / 19.67 dBm (EGPRS12) / GSM1900 : 29.50 dBm (GSM) / 29.39 dBm (GPRS8) / 27.55 dBm (GPRS10) / 23.79 dBm (GPRS12) / 25.06 dBm (EGPRS8) / 23.26 dBm (EGPRS10) / 19.22 dBm (EGPRS12) / Bluetooth : 4.76 dBm WLAN : 14.57 dBm (802.11b) / 15.52 dBm (802.11g)
Maximum ERP/EIRP :	GSM850(GSM) : 0.51 W (27.04 dBm) GSM850(EDGE) : 0.16 W (21.95 dBm) GSM1900(GSM) : 1.98 W (32.96 dBm) GSM1900(EDGE) : 0.79 W (28.99 dBm)
Type of Antenna Connector :	N/A
Antenna Type :	GSM : PIFA Antenna Bluetooth : Chip antenna WLAN : PIFA Antenna
Antenna Gain :	Bluetooth : -0.94 dBi WLAN : 1.22 dBi
Power Rating (DC/AC , Voltage and Current of RF element or PA) :	GSM : DC 3.8V / 2A
GPRS / EGPRS Multislot class :	12
Type of Modulation :	GSM / GPRS : GMSK EDGE : 8PSK Bluetooth : GFSK WLAN : DSSS / OFDM
Type of Emission :	GSM : 300KGXW EDGE : 300KG7W
DUT Stage :	Identical Prototype

1.5 Report Date

EUT Received : Apr. 03, 2008

Report Date : Apr. 14, 2008



2. Test Configuration of Equipment under Test


2.1 Test Manner

1. The spurious emission measurements were carried out in semi-anechoic chamber with 3-meter test range.
2. During all testings, EUT is in link mode with base station emulator at maximum power level.
3. Frequency range investigated: radiated emission 30 MHz to 9000 MHz for GSM850; 30MHz to 19000 MHz for GSM1900.
4. After prescanning, the Sample A was fully tested for different configurations as following table

2.2 Test Mode

Application	GSM850	GSM1900
Radiated Emission	<Sample A> ☒ Mode 1: GSM Link ☒ Mode 2: EDGE Link ☒ Mode 5: GSM Link + BT Tx CH39 ☒ Mode 6: GSM Link + 802.11b Tx CH01	<Sample A> ☒ Mode 3: GSM Link ☒ Mode 4: EDGE Link
	<Sample B> ☒ Mode 7: GSM Link	<Sample B> ☒ Mode 8: GSM Link
	<Sample C> ☒ Mode 9: GSM Link	<Sample C> ☒ Mode 10: GSM Link
	<Sample D> ☒ Mode 11: GSM Link	<Sample D> ☒ Mode 12: GSM Link
Conducted Measurement	☒ Mode 1: GSM Link ☒ Mode 2: EDGE Link	☒ Mode 3: GSM Link ☒ Mode 4: EDGE Link

2.3 Connection Diagram of Test System

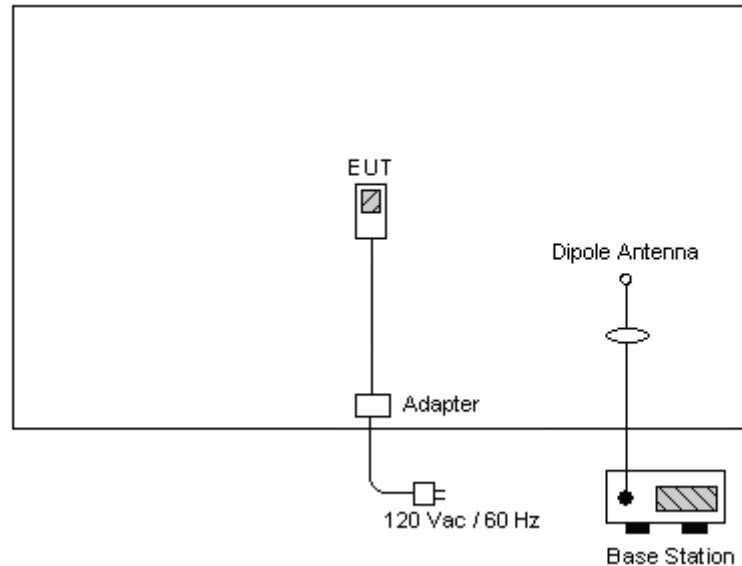

2.4 Ancillary Equipment List

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable / Power Code
1.	Base Station	R&S	CMU200	N/A	Unshielded, 1.8m



3. General Information of Test Site

Test Site Location : No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park,
Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.
TEL : 886-3-327-3456
FAX : 886-3-328-4978
Test Site No : 03CH06-HY, TH02-HY

The chamber meets the characteristics of ANSI C63.4-2003. This site is on file with the FCC.

3.1 Test Voltage

AC 120V / 60Hz

3.2 Test Compliance

47 CFR Part 22H, 24E, Part 2

3.3 Frequency Range

- a. Radiation: from 30MHz to 9000MHz for GSM850.
- b. Radiation: from 30 MHz to 19000 MHz for GSM1900.

3.4 Test Distance

The test distance of radiated emission from antenna to EUT is 3 m.



4. Test Data and Test Result

4.1 List of Measurements and Examinations

FCC Rule	Description of Test	Result	Section
§2.1046	RF Output Power	Passed	4.2
§ 22.913 §24.232	ERP / EIRP	Passed	4.3
§2.1049, § 22.917, § 24.238(b)	Occupied Bandwidth & Band Edge Measurement	Passed	4.4
§2.1051	Conducted Emission	Passed	4.5
§2.1053	Field Strength of Spurious Radiation	Passed	4.6
§2.1055, § 22.355, §24.235	Frequency Stability vs. Temperature	Passed	4.7
§2.1055, §22.355, §24.235	Frequency Stability vs. Voltage	Passed	4.8

4.2 RF Output Power


4.2.1 Measurement Instruments

As described in chapter 5 of this test report.

4.2.2 Test Procedure

- The transmitter output was connected to power meter and base station through power divider.
- Set EUT at PCL=5 for GSM850 and/or PCL=0 for GSM1900 maximum power through base station.
- Select lowest, middle, and highest channels for each band.

4.2.3 Test Setup Layout

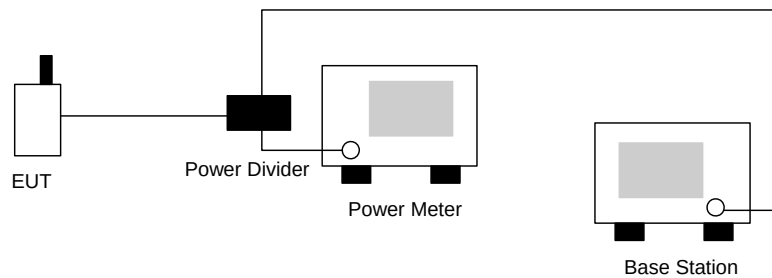

4.2.4 Test Result

Bands	Channel	Frequency (MHz)	Conducted Power (dBm)	Conducted Power (Watts)
GSM850 (GSM)	128	824.2 (Low)	32.11	1.626
	189	836.4 (Mid)	32.26	1.683
	251	848.8 (High)	32.43	1.750
GSM850 (EDGE)	128	824.2 (Low)	25.94	0.393
	189	836.4 (Mid)	25.86	0.385
	251	848.8 (High)	25.76	0.377
GSM1900 (GSM)	512	1850.2 (Low)	29.50	0.891
	661	1880.0 (Mid)	29.21	0.834
	810	1909.8 (High)	28.87	0.771
GSM1900 (EDGE)	512	1850.2 (Low)	25.06	0.321
	661	1880.0 (Mid)	25.03	0.318
	810	1909.8 (High)	24.91	0.310



4.3 ERP / EIRP Measurement

Equivalent isotropic radiated power measurements by substitution method according to ANSI/TIA/EIA-603-C.

4.3.1 Measurement Instruments

As described in chapter 5 of this test report.

4.3.2 Test Procedure

- a. The EUT was placed on a tutable with 1.0 meter height in an fully anechoic chamber.
- b. The EUT was set 1.2 meters from the receiving antenna which was mounted on the antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiated power.
- d. The height of the receiving antenna is also kept at 1.0M height.
- e. Taking the record of maximum ERP/EIRP.
- f. A dipole antenna was substituted in place of the EUT and was driven by a signal generator.
- g. The conducted power at the terminal of the dipole antenna is measured.
- h. Repeat step 3 to step 5 to get the maximum ERP/EIRP of the substitution antenna.
- i. $ERP/EIRP = P_s + E_t - E_s + G_s = P_s + R_t - R_s + G_s$

P_s (dBm) : Input power to substitution antenna.

G_s (dBi or dBd) : Substitution antenna Gain.

$E_t = R_t + AF$


$E_s = R_s + AF$

AF (dB/m) : Receive antenna factor

R_t : The highest received signal in Spectrum Analyzer for EUT.

R_s : The highest received signal in spectrum analyzer for substitution antenna.

4.3.3 Test Setup Layout of ERP/EIRP

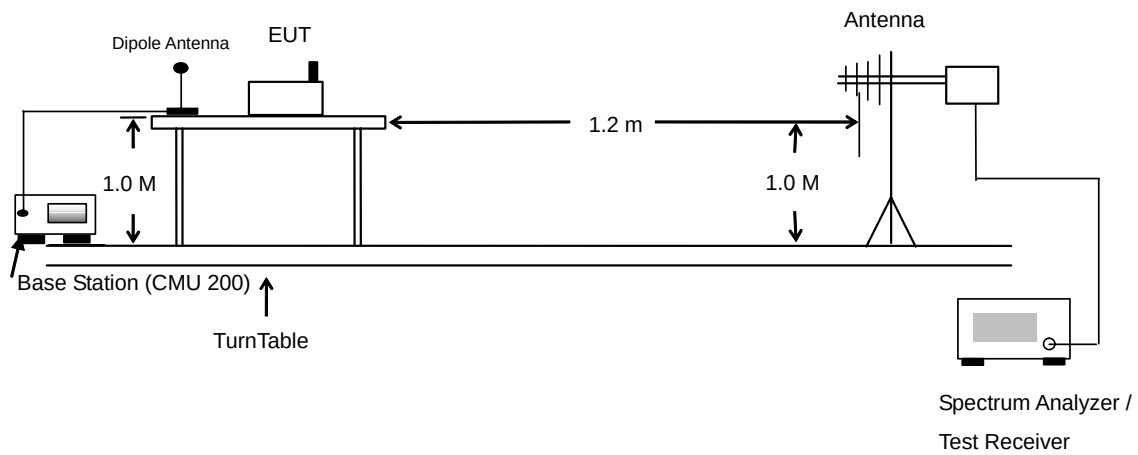

**4.3.4 Test Result**

GSM850 (GSM) Radiated Power ERP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	ERP (dBm)	ERP (W)
824.20	-29.80	-48.12	0.00	-1.08	17.24	0.05
836.40	-30.08	-48.28	0.00	-0.93	17.27	0.05
848.80	-29.87	-48.35	0.00	-0.76	17.72	0.06
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	ERP (dBm)	ERP (W)
824.20	-20.38	-47.97	0.00	-1.08	26.51	0.45
836.40	-20.70	-48.01	0.00	-0.93	26.38	0.43
848.80	-20.25	-48.05	0.00	-0.76	27.04	0.51

GSM850 (EDGE) Radiated Power ERP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	ERP (dBm)	ERP (W)
824.20	-34.65	-48.12	0.00	-1.08	12.39	0.02
836.40	-34.91	-48.28	0.00	-0.93	12.44	0.02
848.80	-34.65	-48.35	0.00	-0.76	12.94	0.02
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	ERP (dBm)	ERP (W)
824.20	-25.06	-47.97	0.00	-1.08	21.83	0.15
836.40	-25.21	-48.01	0.00	-0.93	21.87	0.15
848.80	-25.34	-48.05	0.00	-0.76	21.95	0.16



GSM1900 (GSM) Radiated Power EIRP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1850.20	-22.29	-51.88	0.00	1.96	31.55	1.43
1880.00	-24.57	-52.99	0.00	2.00	30.42	1.10
1909.80	-27.62	-54.28	0.00	1.98	28.64	0.73
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1850.20	-21.13	-52.13	0.00	1.96	32.96	1.98
1880.00	-23.14	-53.17	0.00	2.00	32.03	1.60
1909.80	-24.10	-54.13	0.00	1.98	32.01	1.59

GSM1900 (EDGE) Radiated Power EIRP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1850.20	-25.88	-51.88	0.00	1.96	27.96	0.63
1880.00	-28.23	-52.99	0.00	2.00	26.76	0.47
1909.80	-31.02	-54.28	0.00	1.98	25.24	0.33
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1850.20	-25.13	-52.13	0.00	1.96	28.96	0.79
1880.00	-26.18	-53.17	0.00	2.00	28.99	0.79
1909.80	-27.42	-54.13	0.00	1.98	28.69	0.74

4.4 Occupied Bandwidth and Band Edge Measurement


4.4.1 Measurement Instruments

As described in chapter 5 of this test report.

4.4.2 Test Procedure

- The EUT was connected to Spectrum Analyzer and Base Station via power divider.
- The 99% occupied bandwidth of middle channel for the highest power was measured.
- The 26dB bandwidth were measured for low, middle, high channels.
- The bandedge of low and high channels for the highest RF powers within the transmitting frequency band were measured. Setting RBW as roughly BW/100.

4.4.3 Test Setup Layout

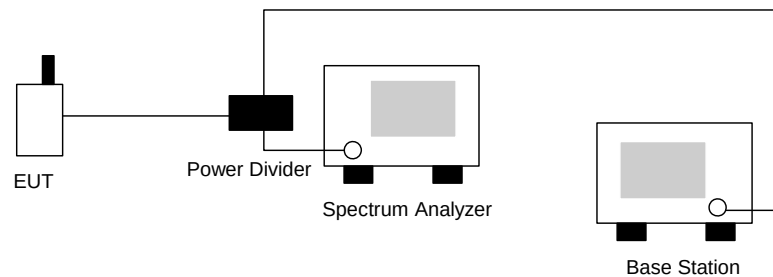

4.4.4 Test Summary


GSM850					
99% Occupied Bandwidth (kHz)		26dB Bandwidth (kHz)			
Channel	Ch 189	Channel	Ch 128	Ch 189	Ch 251
GSM	242.00	GSM	306.00	302.00	302.00
EDGE	236.00	EDGE	308.00	308.00	302.00

GSM1900					
99% Occupied Bandwidth		26dB Bandwidth (kHz)			
Channel	Ch 661	Channel	Ch 512	Ch 661	Ch 810
GSM	240.00	GSM	302.00	308.00	308.00
EDGE	240.00	EDGE	304.00	302.00	306.00



4.4.5 Test Result


- Mode 1
- Test Mode : GSM850 (GSM) CH128 Lower Band Edge
- Power State : High

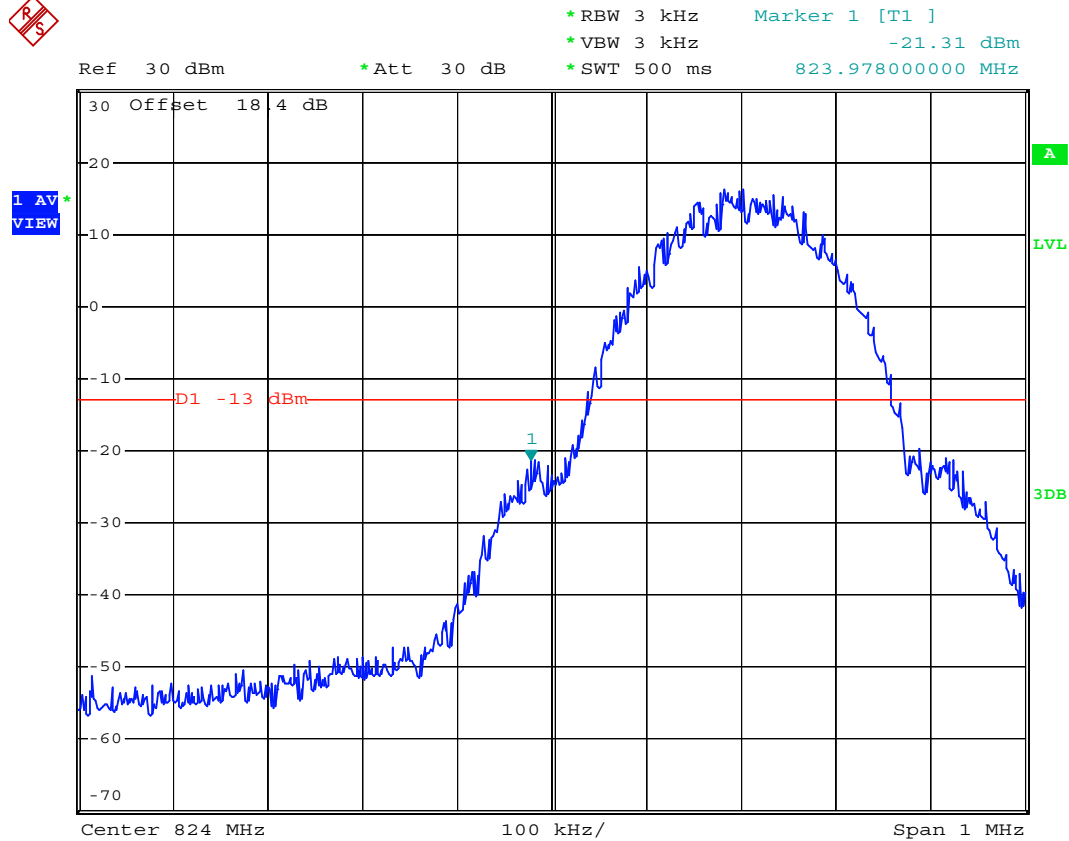

Date: 4.APR.2008 04:08:00




- Test Mode : GSM850 (GSM) CH128 99% Occupied Bandwidth
- Power State : High

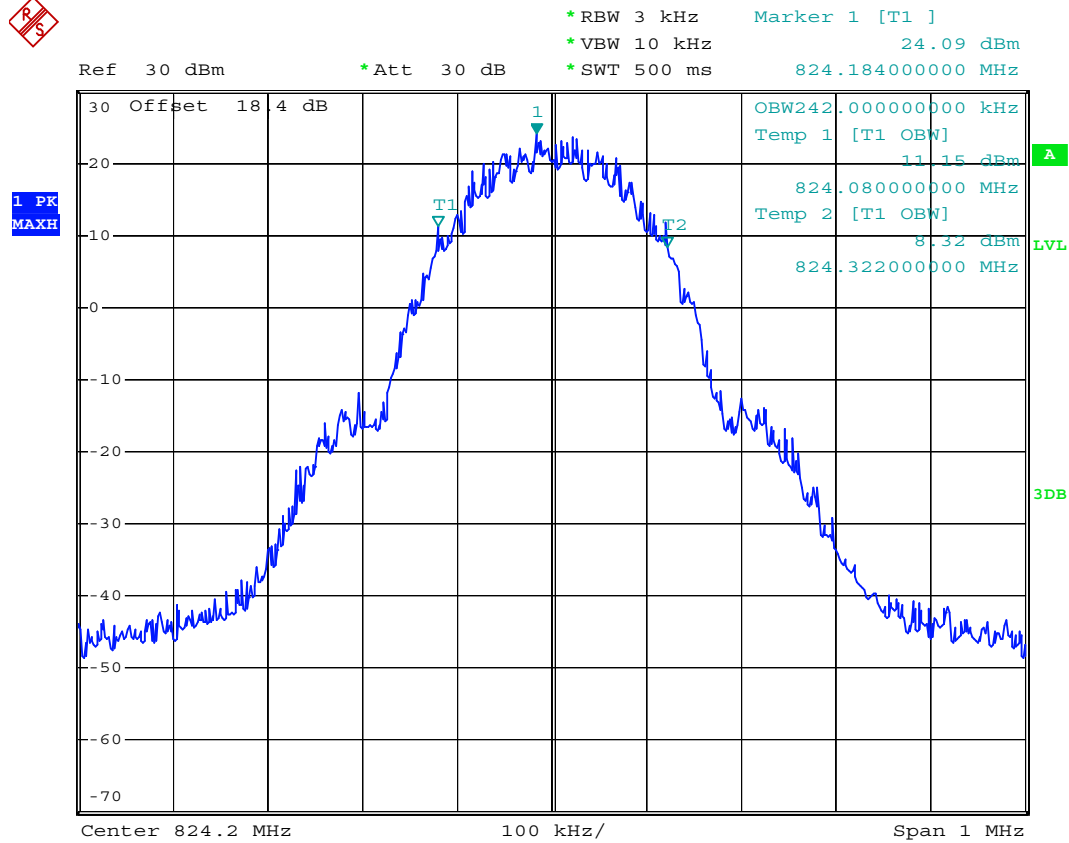

Date: 4.APR.2008 04:04:13




- Test Mode : GSM850 (GSM) CH189 99% Occupied Bandwidth
- Power State : High

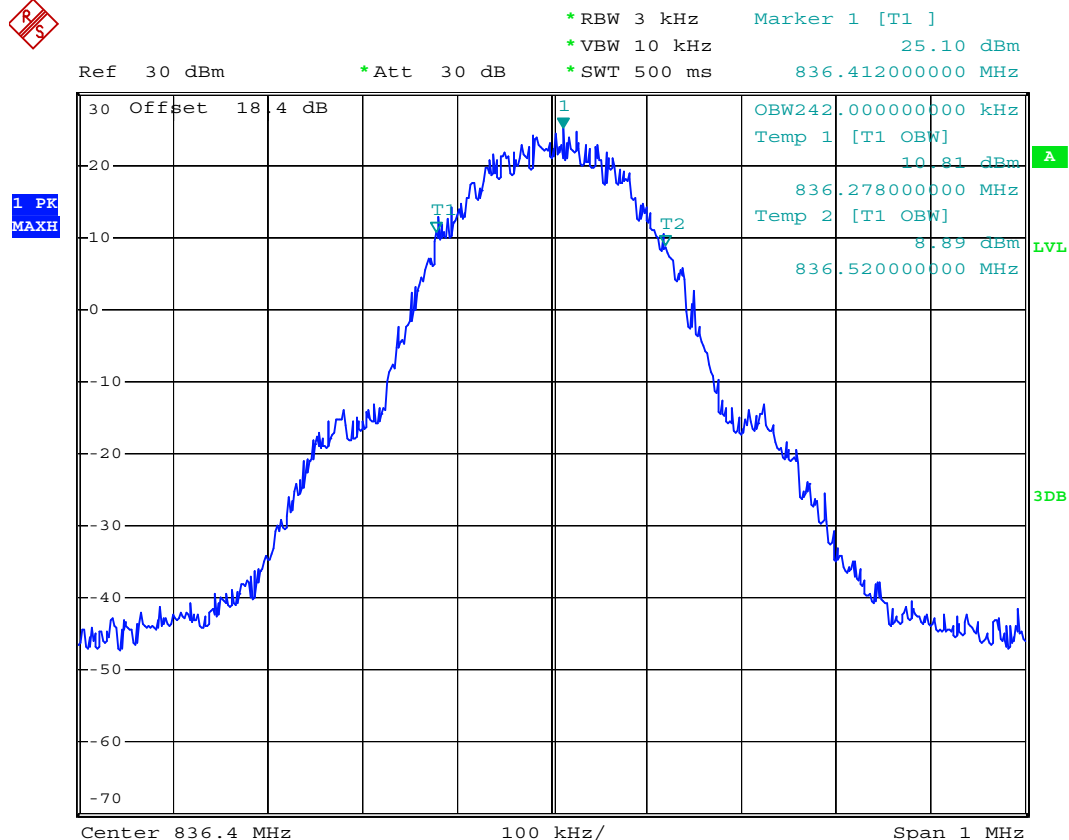

Date: 4.APR.2008 04:04:46




- Test Mode : GSM850 (GSM) CH 251 99% Occupied Bandwidth
- Power State : High

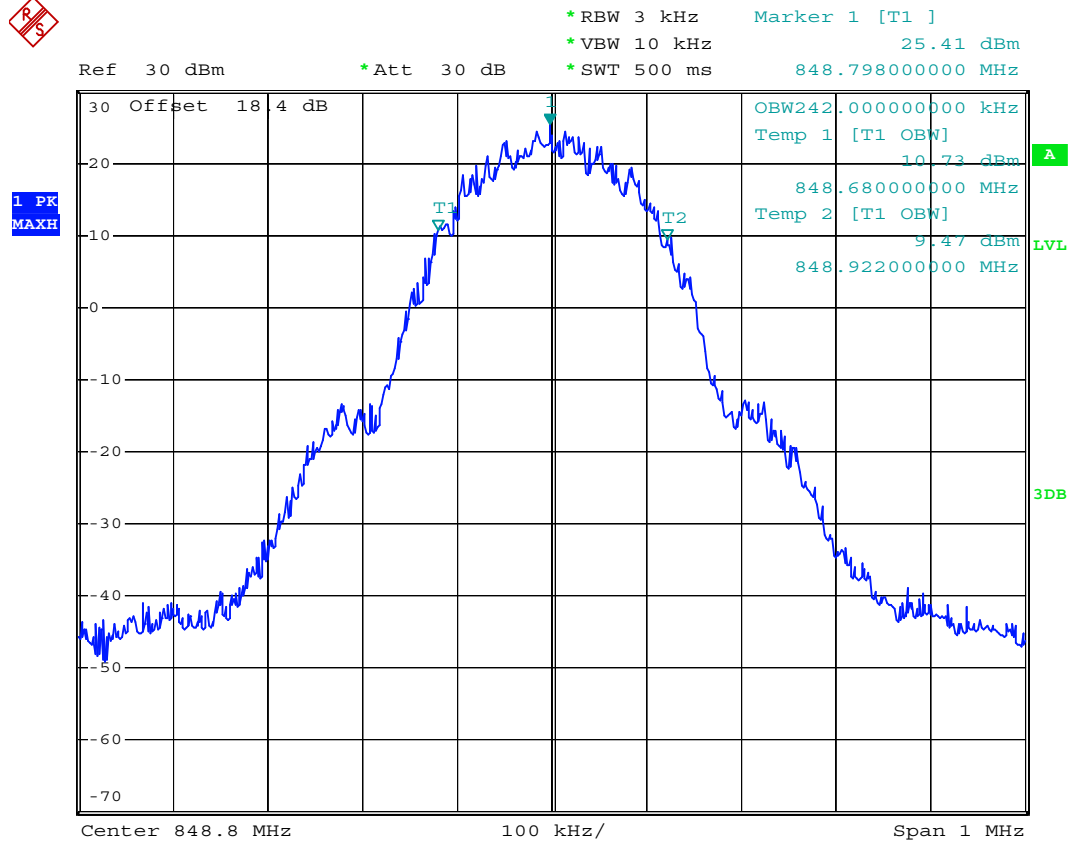

Date: 4.APR.2008 04:03:40




- Test Mode : GSM850 (GSM) CH128 26dB Bandwidth
- Power State : High

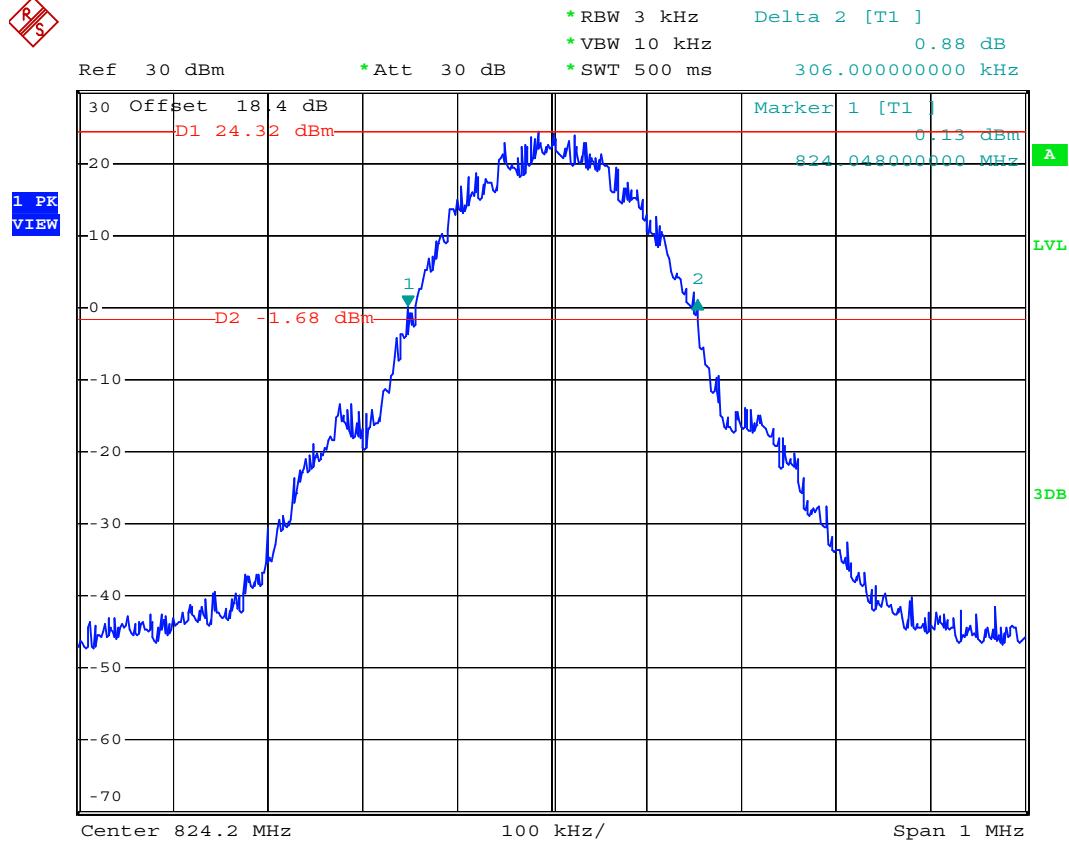

Date: 4.APR.2008 04:01:02




- Test Mode : GSM850 (GSM) CH189 26dB Bandwidth
- Power State : High

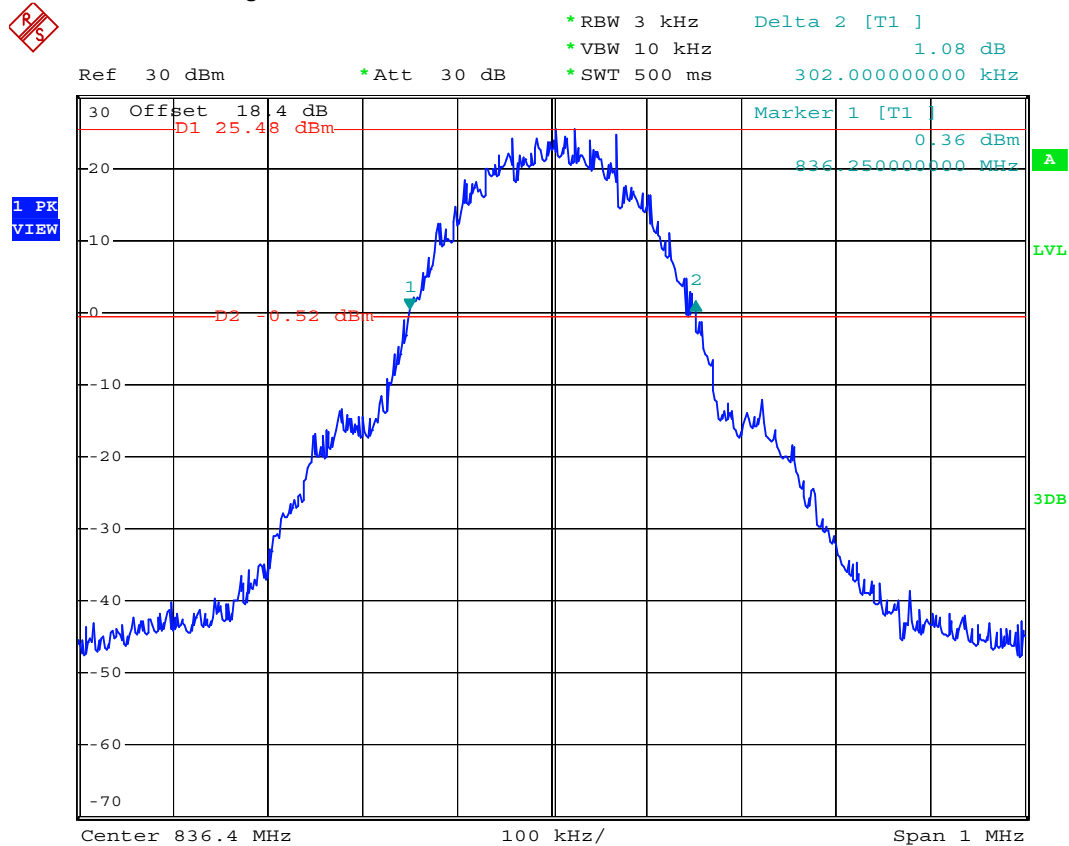

Date: 4.APR.2008 04:01:59




- Test Mode : GSM850 (GSM) CH 251 26dB Bandwidth
- Power State : High

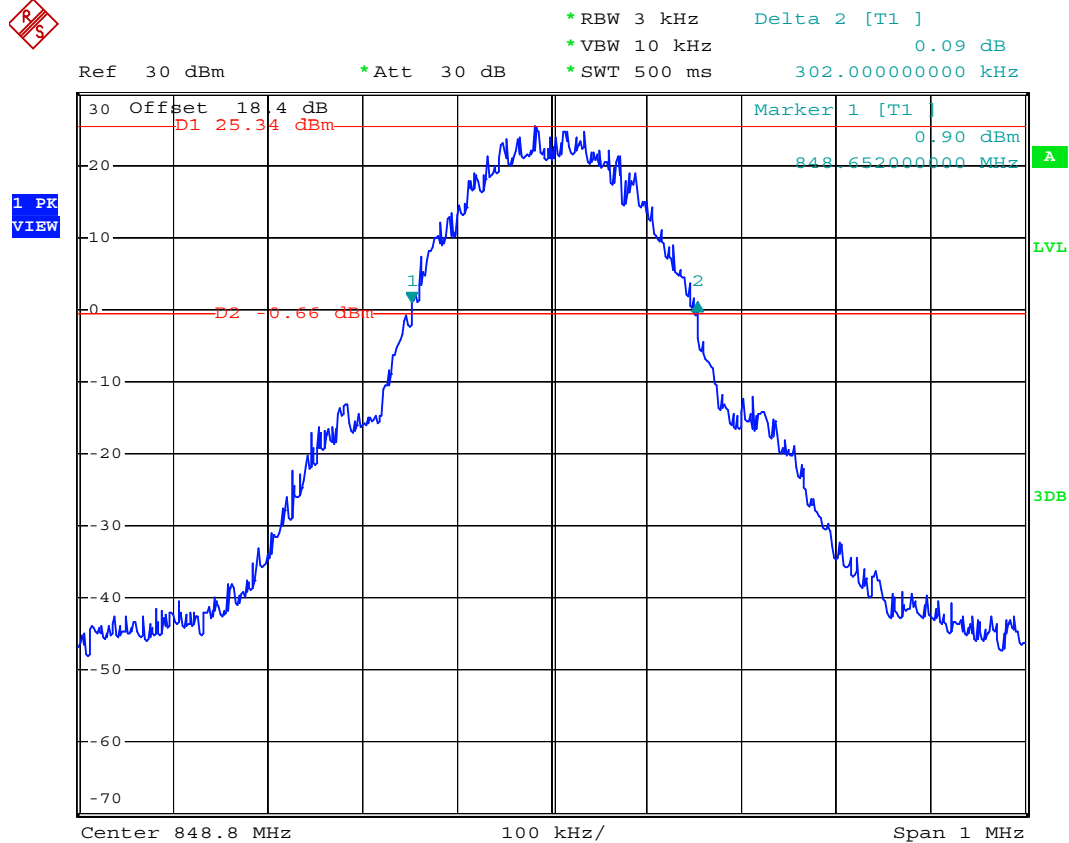

Date: 4.APR.2008 04:03:05




- Test Mode : GSM850 (GSM) CH251 Higher Band Edge
- Power State : High

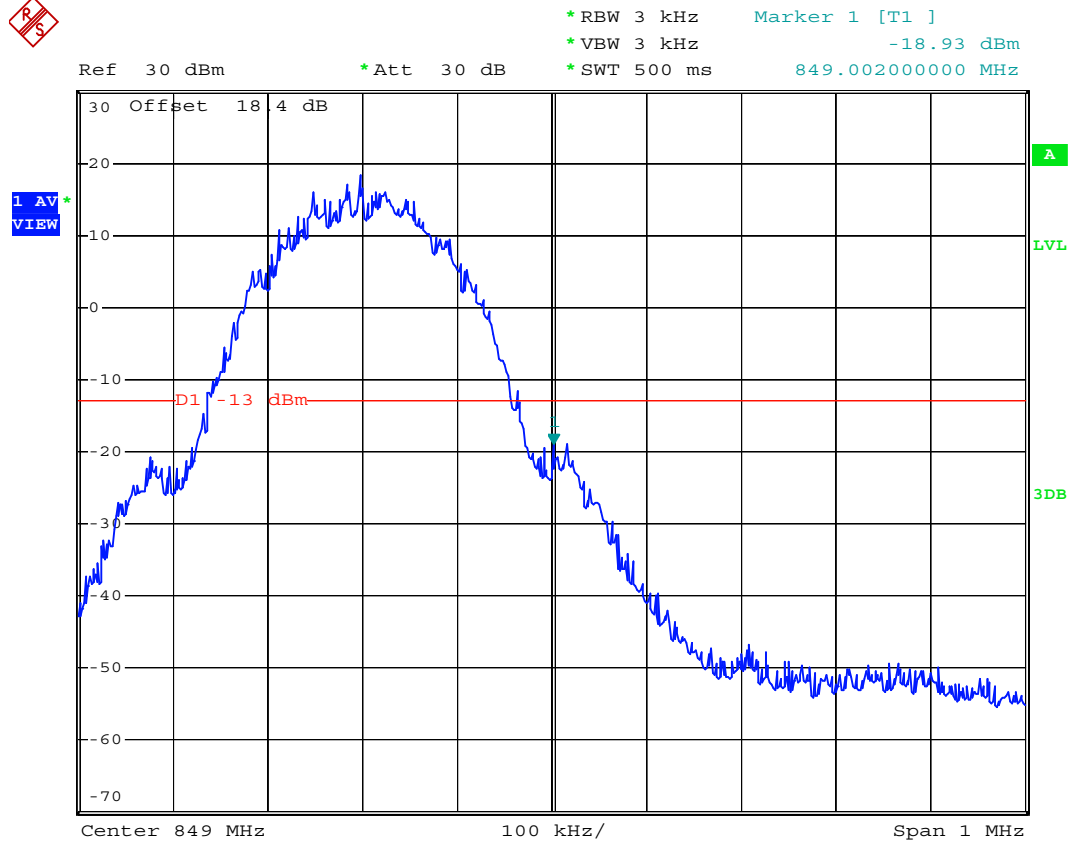

Date: 4.APR.2008 04:11:08




- Mode 2
- Test Mode : GSM850 (EDGE) CH128 Lower Band Edge
- Power State : High

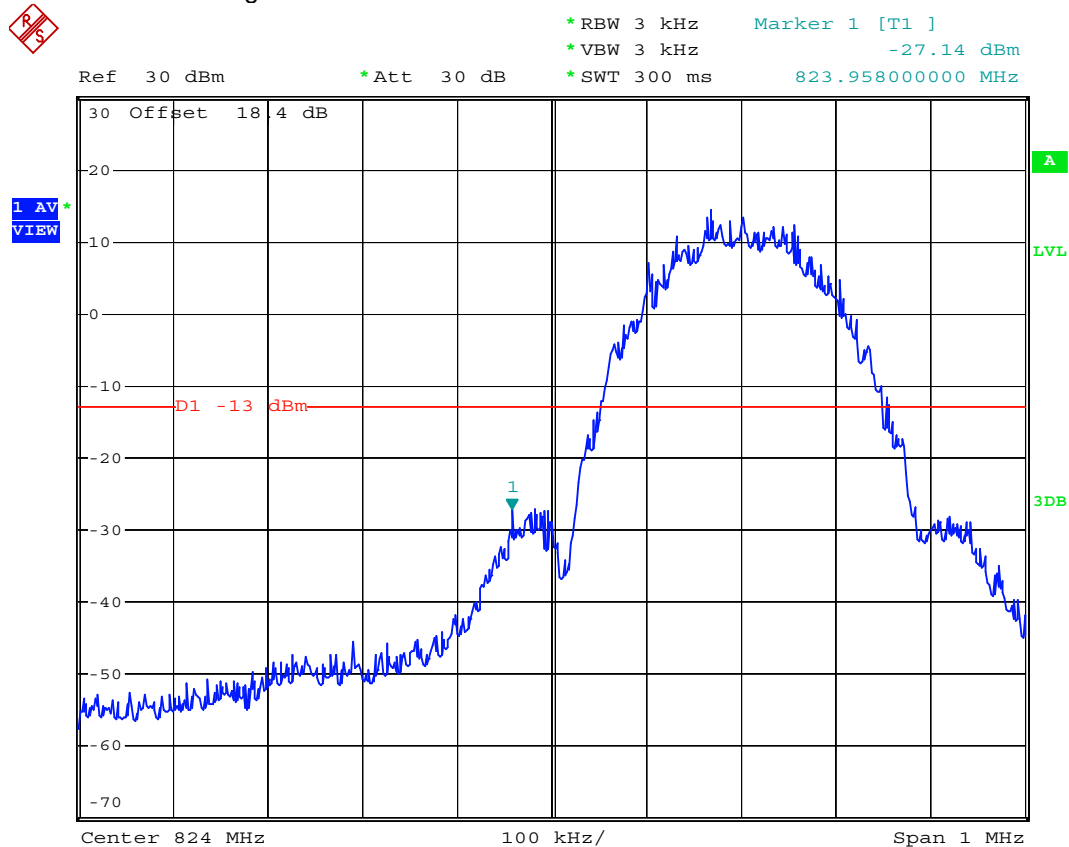

Date: 4.APR.2008 04:23:34




- Test Mode : GSM850 (EDGE) CH128 99% Occupied Bandwidth
- Power State : High

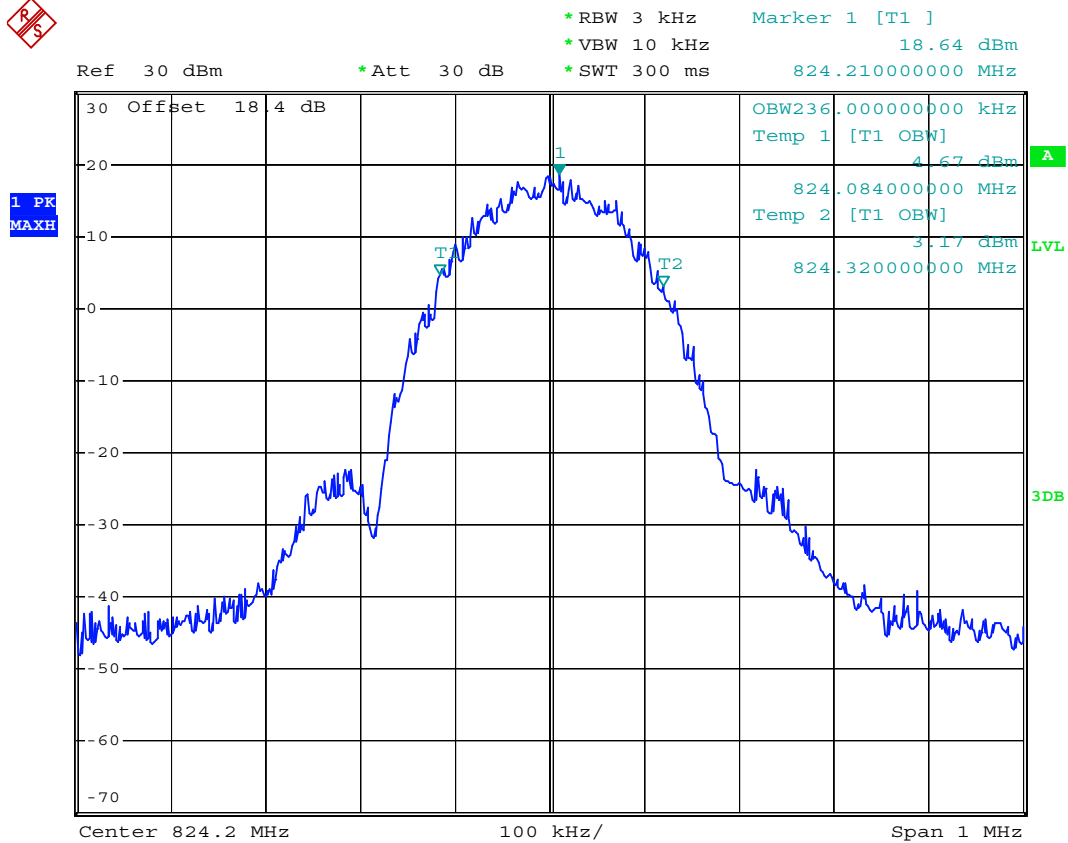

Date: 4.APR.2008 04:40:49




- Test Mode : GSM850 (EDGE) CH189 99% Occupied Bandwidth
- Power State : High

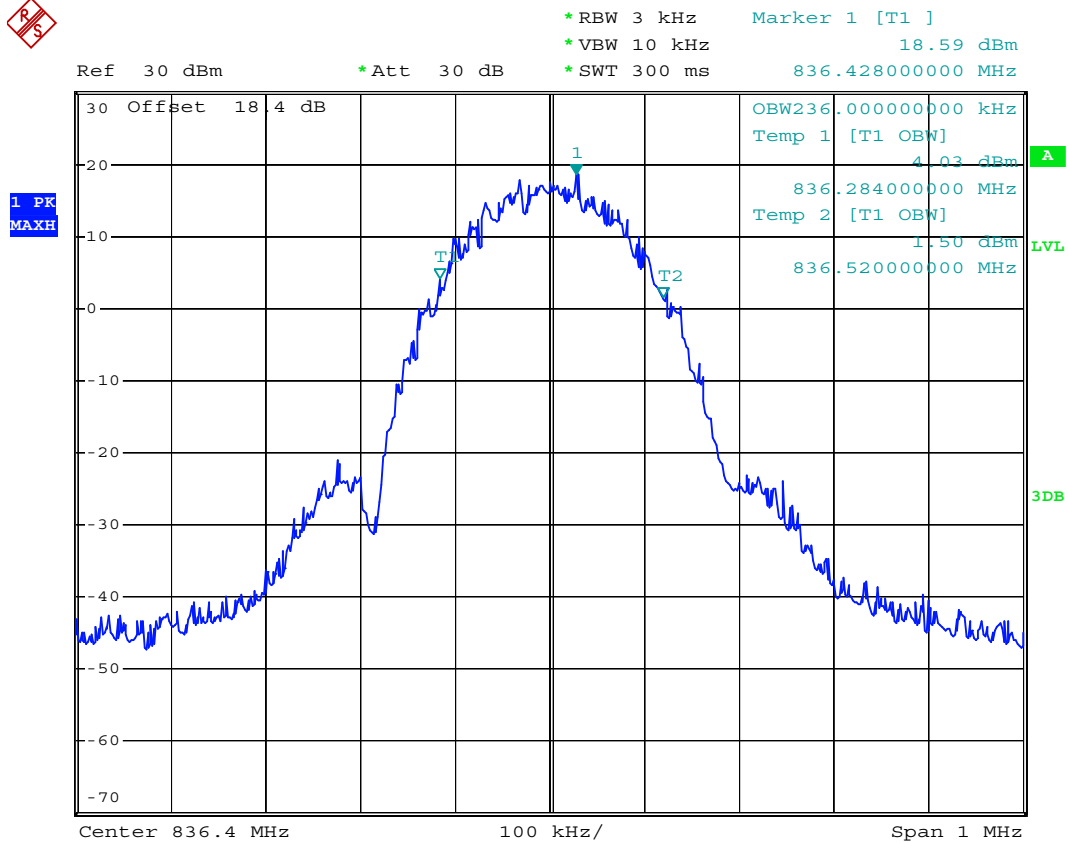

Date: 4.APR.2008 04:41:35




- Test Mode : GSM850 (EDGE) CH 251 99% Occupied Bandwidth
- Power State : High

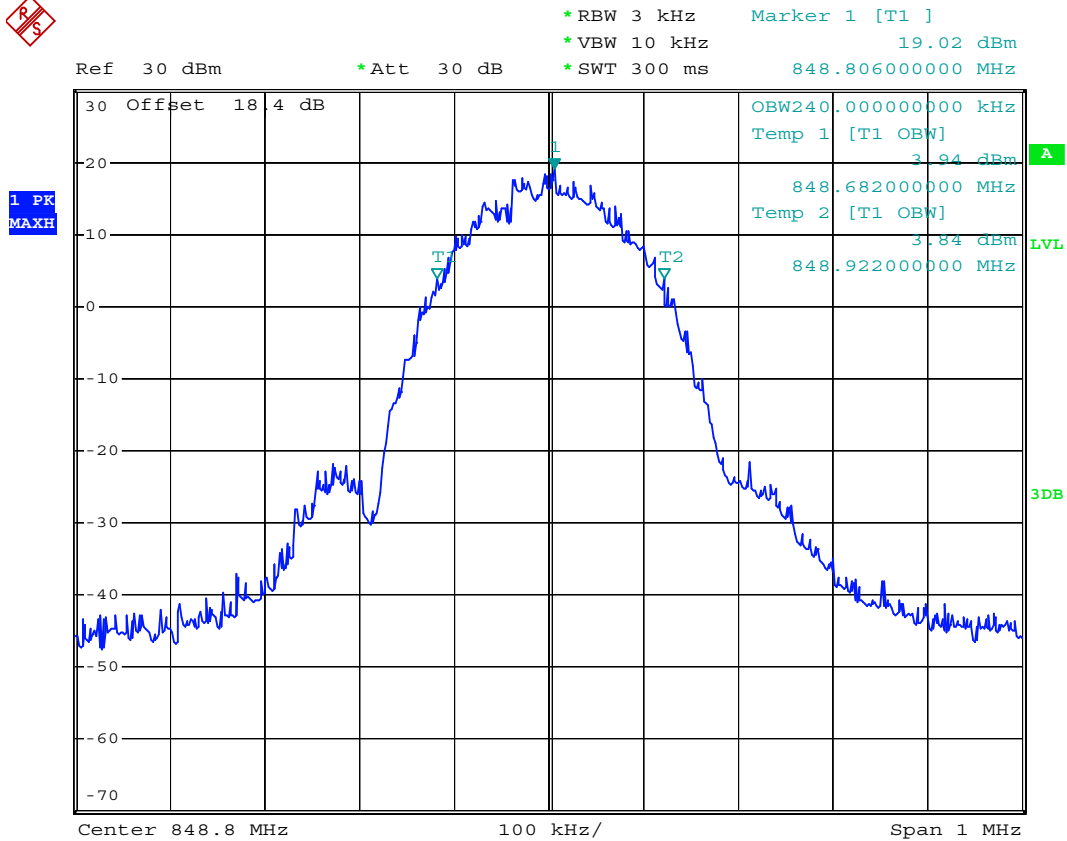

Date: 4.APR.2008 04:40:05




- Test Mode : GSM850 (EDGE) CH128 26dB Bandwidth
- Power State : High

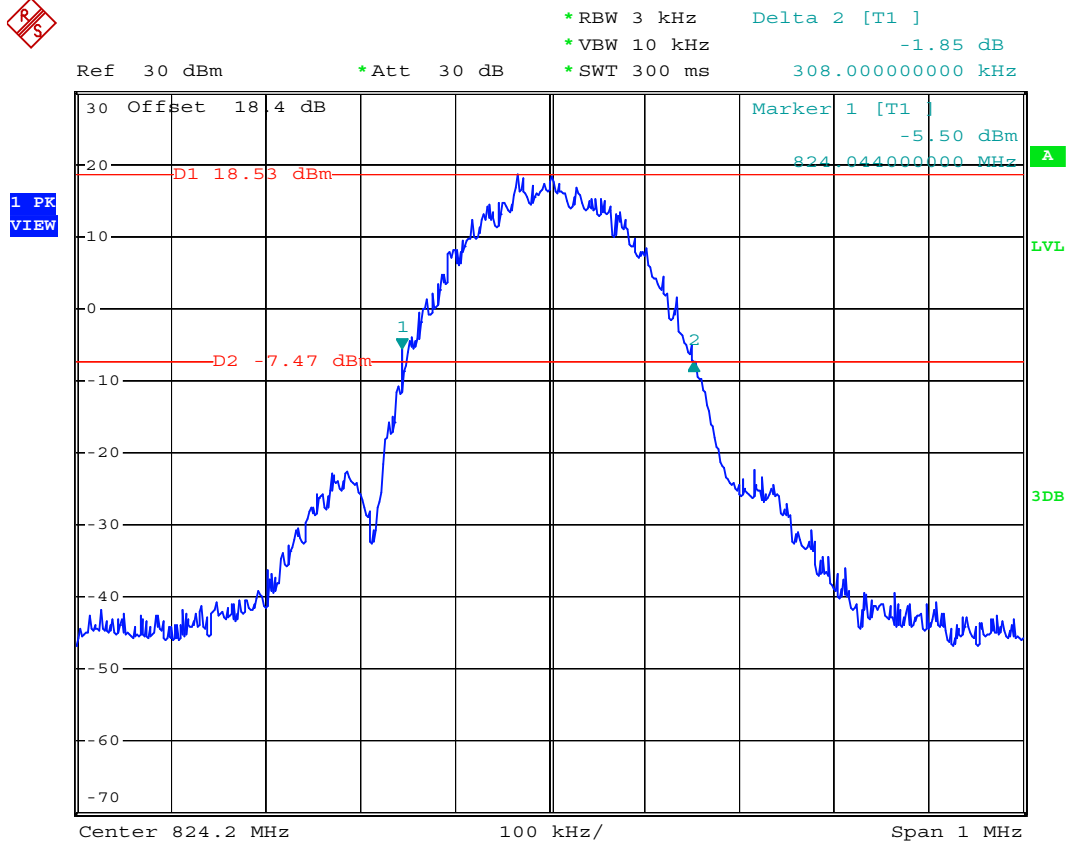

Date: 4.APR.2008 04:34:44




- Test Mode : GSM850 (EDGE) CH189 26dB Bandwidth
- Power State : High

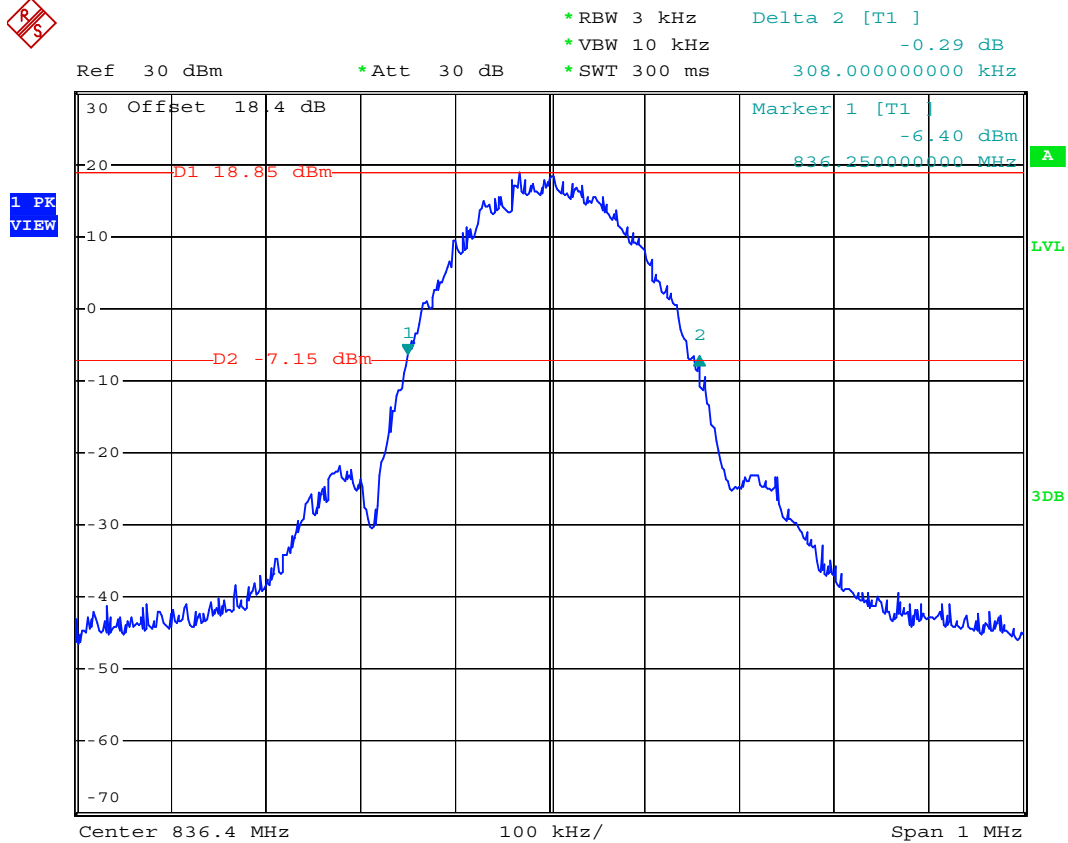

Date: 4.APR.2008 04:36:41




- Test Mode : GSM850 (EDGE) CH 251 26dB Bandwidth
- Power State : High

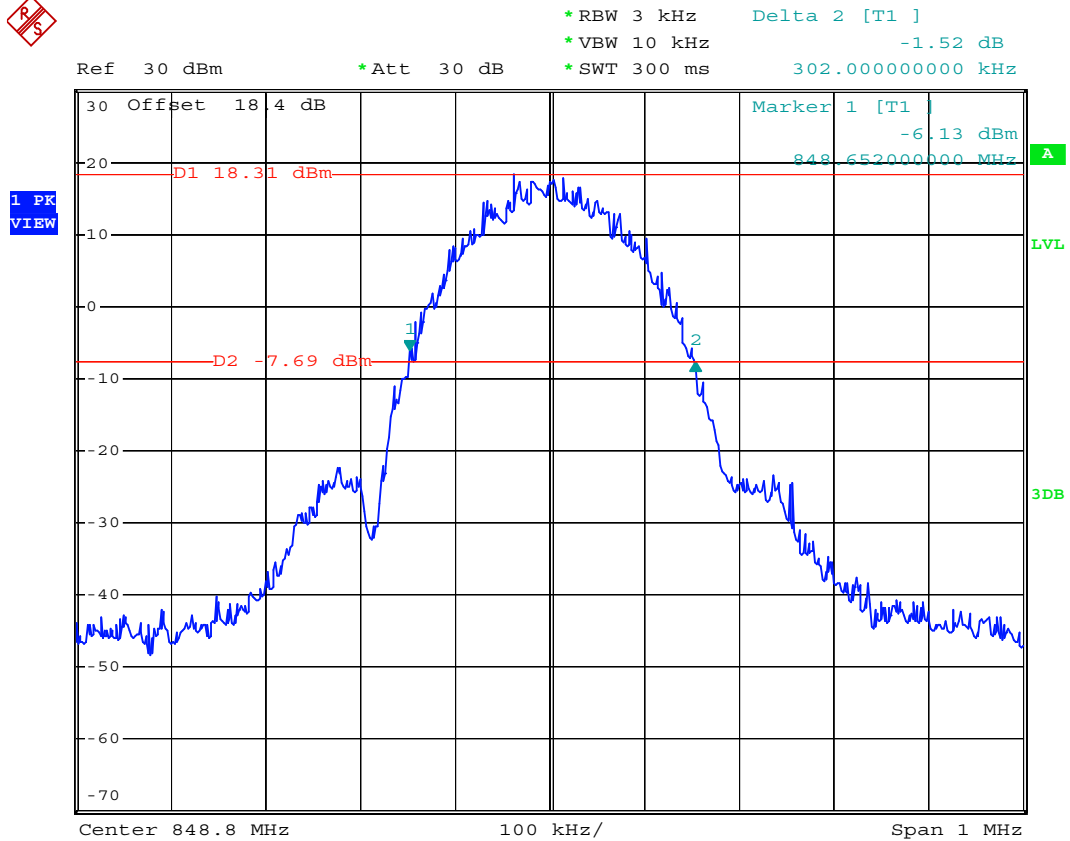

Date: 4.APR.2008 04:39:00




- Test Mode : GSM850 (EDGE) CH251 Higher Band Edge
- Power State : High

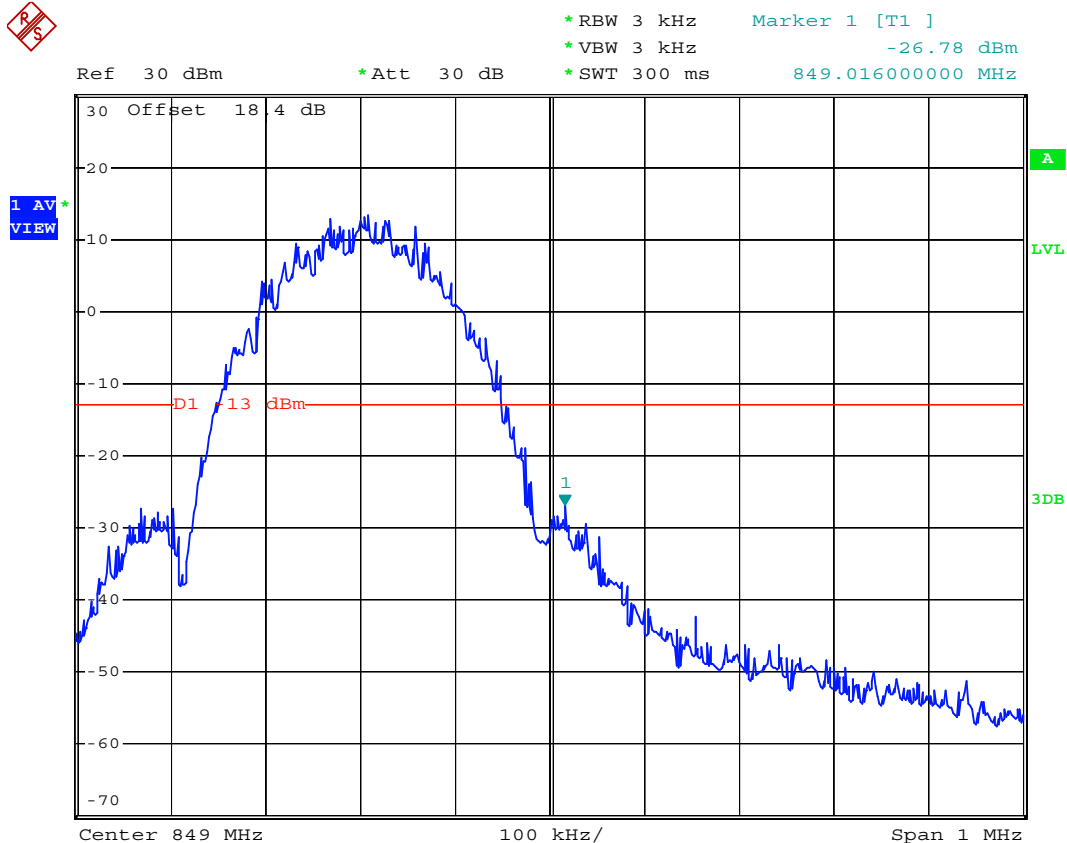

Date: 4.APR.2008 04:32:08




- Mode 3
- Test Mode : GSM1900 (GSM) CH512 Lower Band Edge
- Power State : High

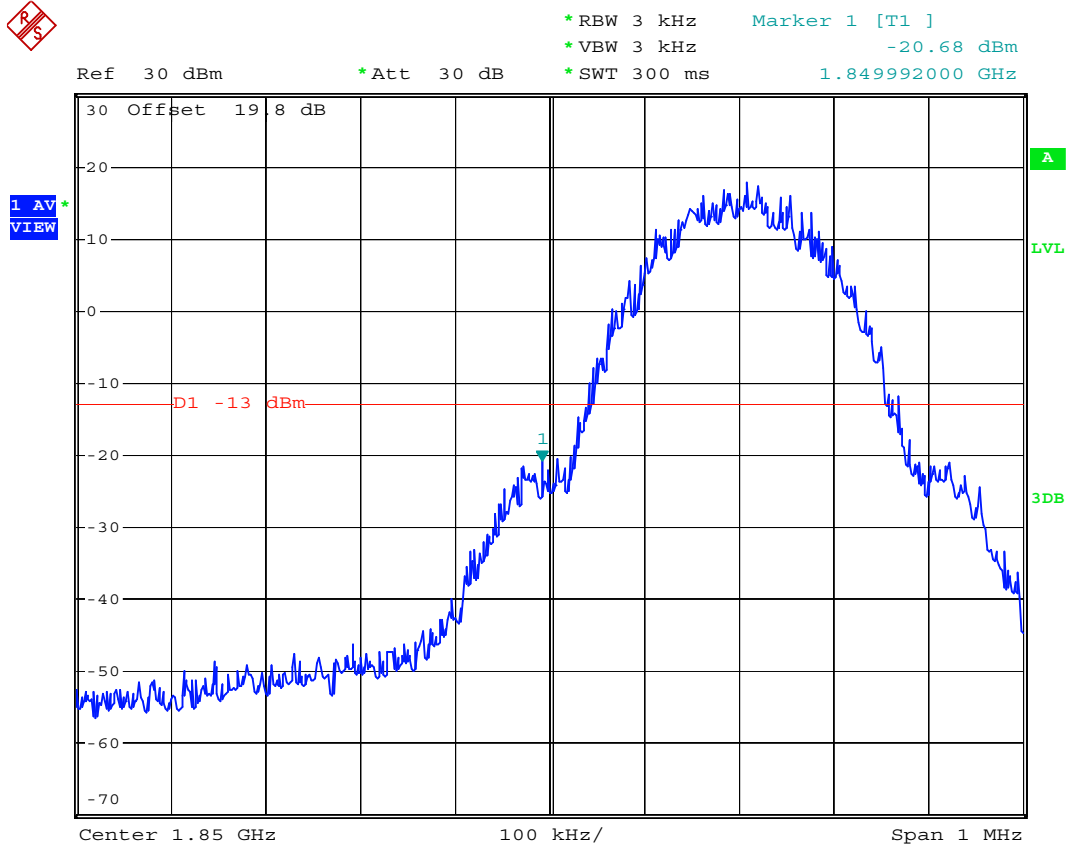

Date: 4.APR.2008 05:37:04




- Test Mode : GSM1900 (GSM) CH512 99% Occupied Bandwidth
- Power State : High

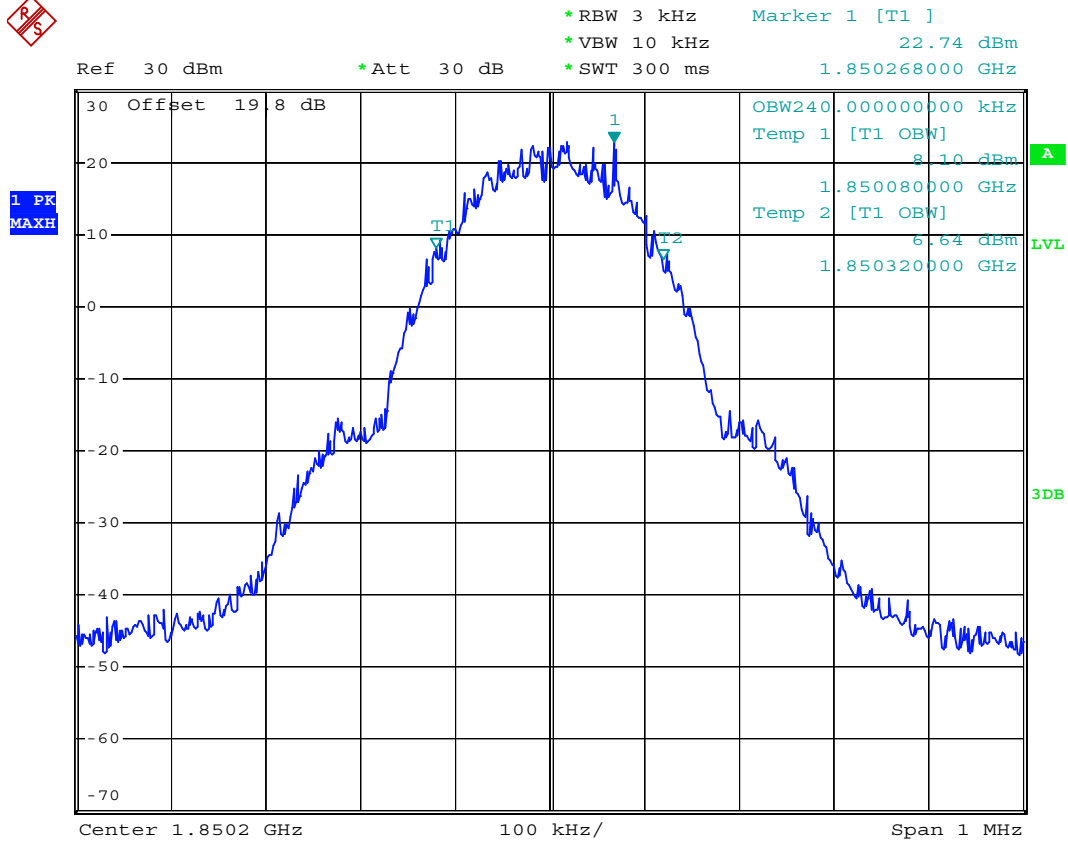

Date: 4.APR.2008 05:42:38




- Test Mode : GSM1900 (GSM) CH661 99% Occupied Bandwidth
- Power State : High

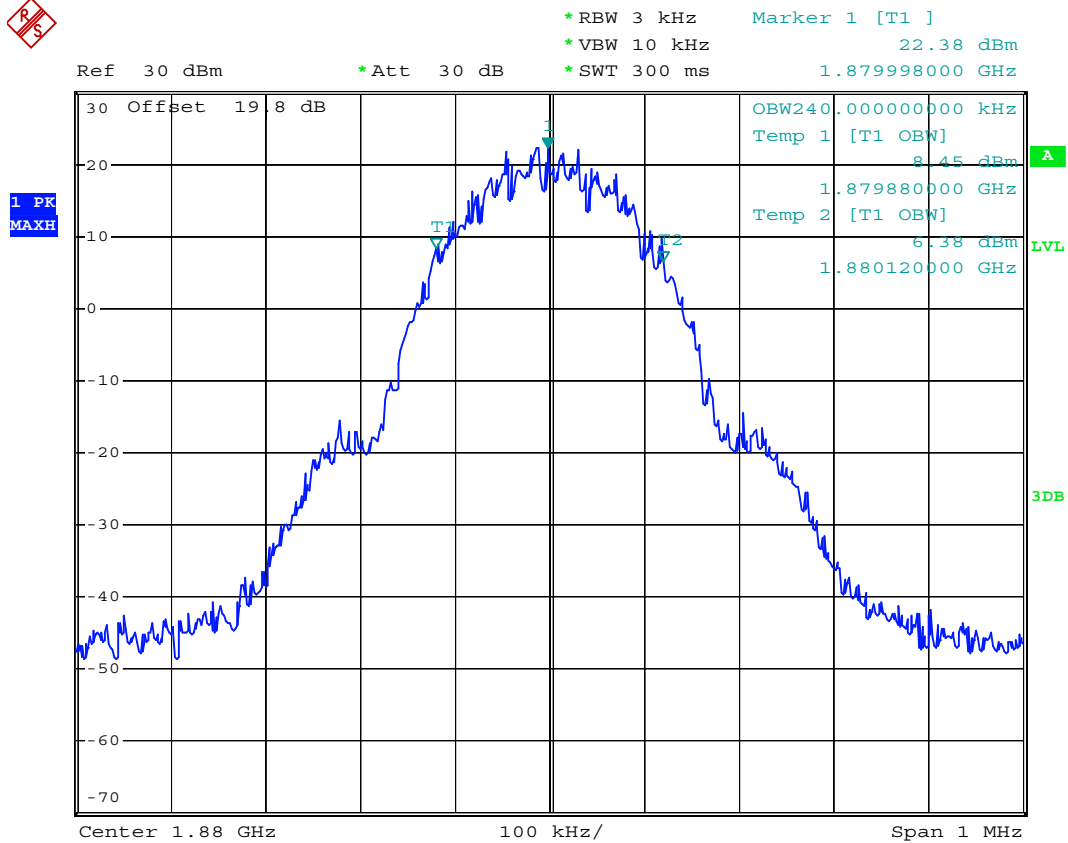

Date: 4.APR.2008 05:43:14




- Test Mode : GSM1900 (GSM) CH810 99% Occupied Bandwidth
- Power State : High

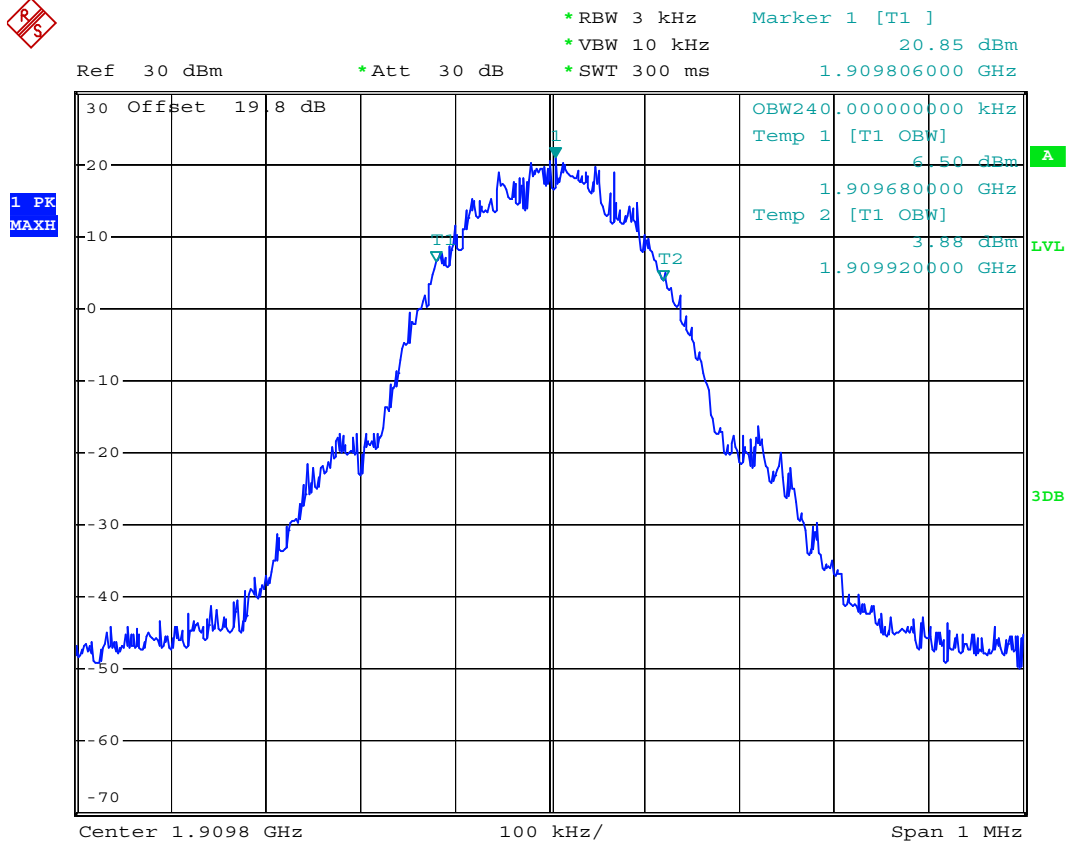

Date: 4.APR.2008 05:41:45




- Test Mode : GSM1900 (GSM) CH512 26dB Bandwidth
- Power State : High

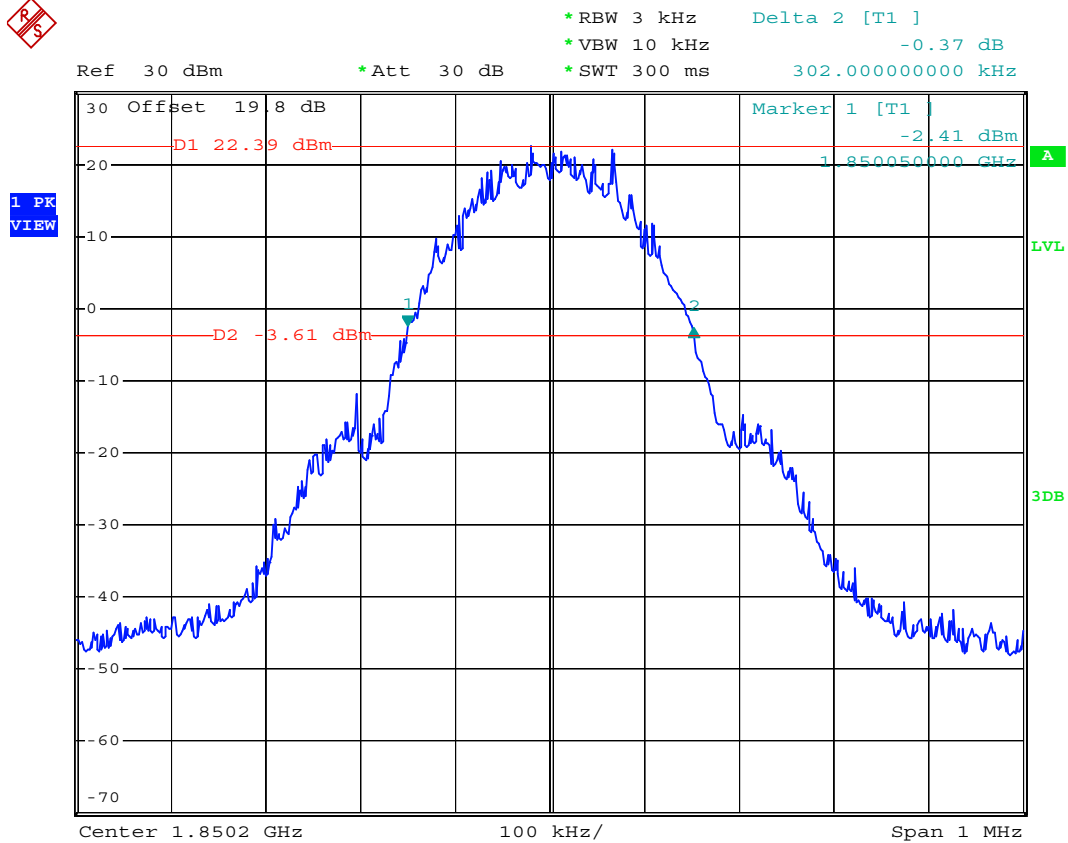

Date: 4.APR.2008 05:38:22




- Test Mode : GSM1900 (GSM) CH661 26dB Bandwidth
- Power State : High

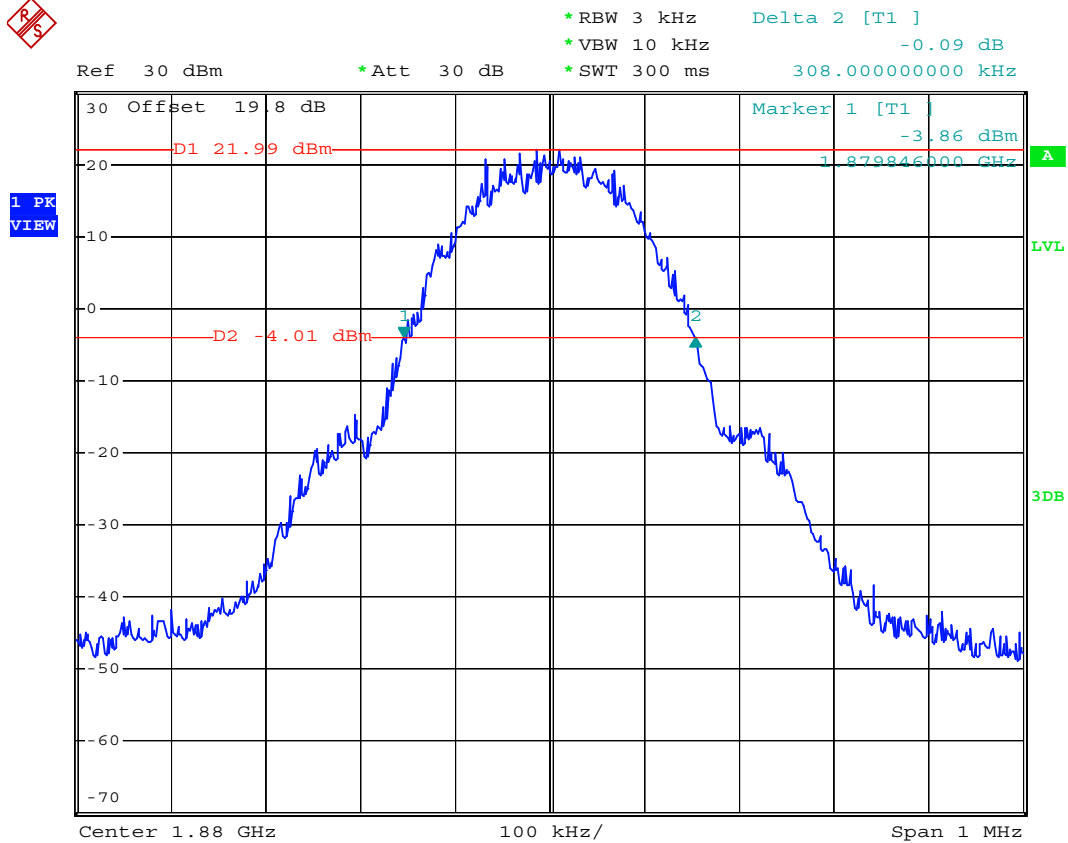

Date: 4.APR.2008 05:39:39




- Test Mode : GSM1900 (GSM) CH810 26dB Bandwidth
- Power State : High

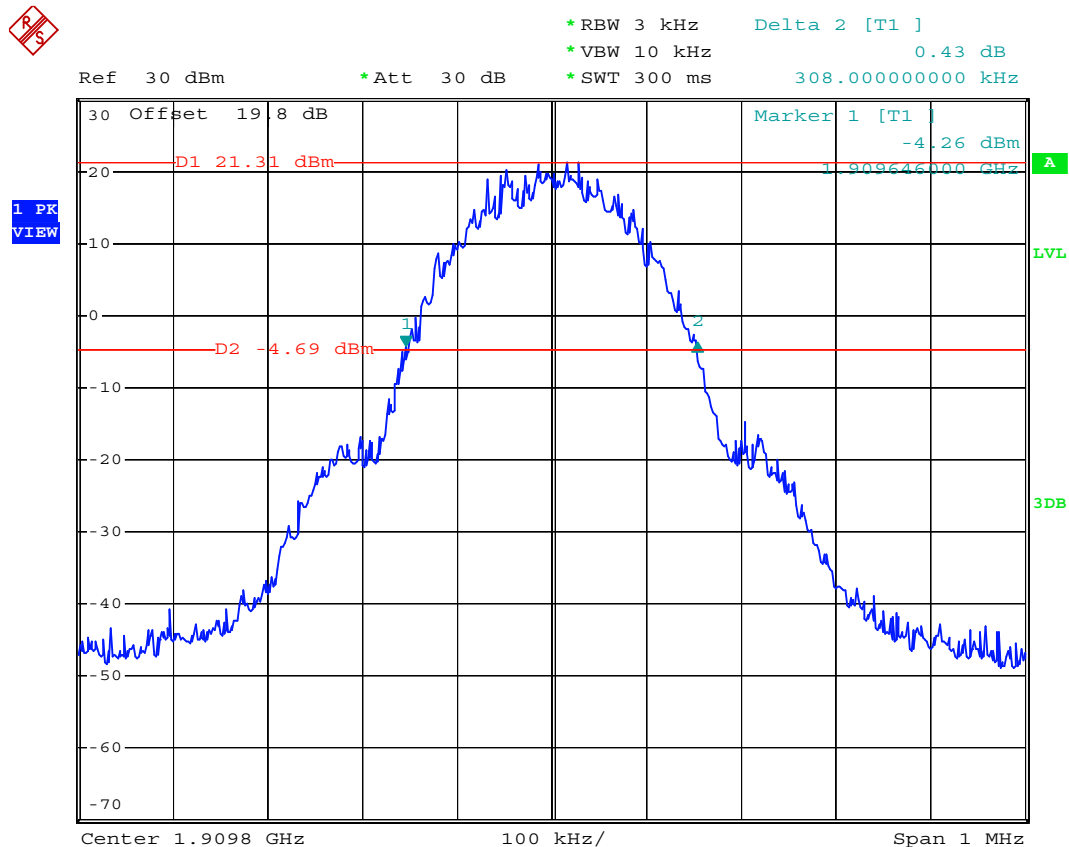

Date: 4.APR.2008 05:41:04




- Test Mode : GSM1900 (GSM) CH810 Higher Band Edge
- Power State : High

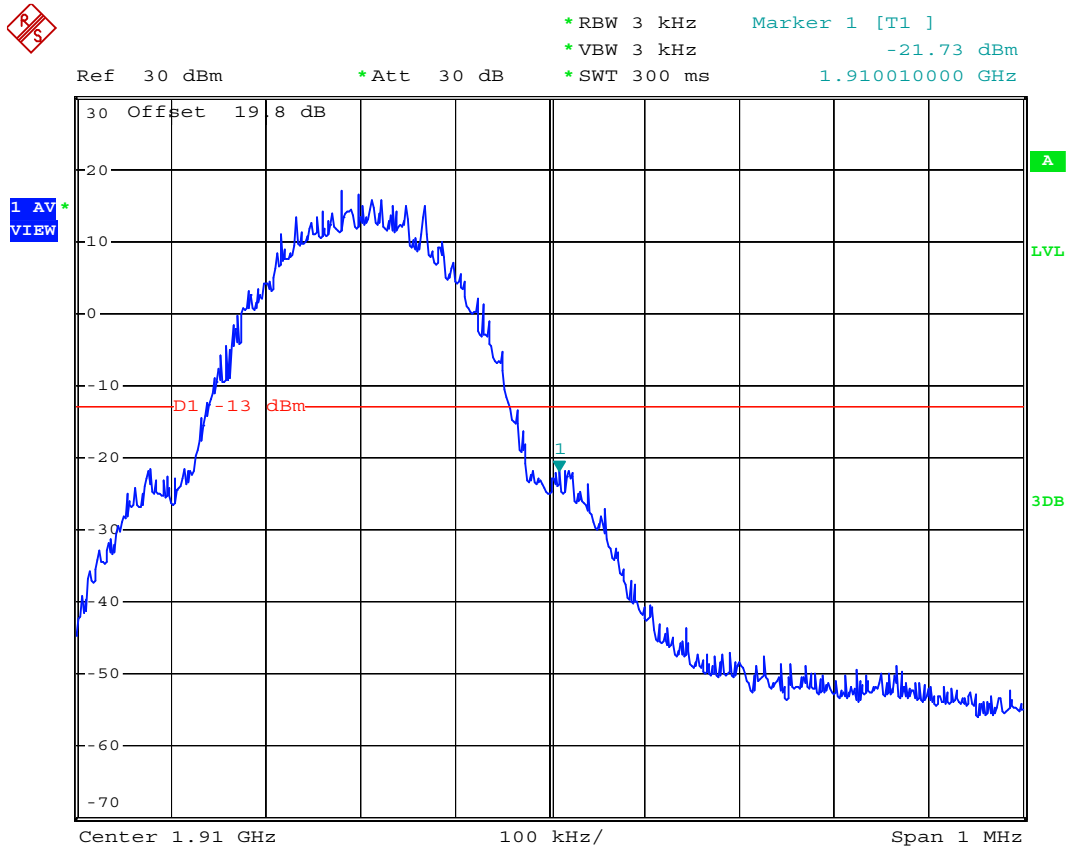

Date: 4.APR.2008 05:34:06




- Mode 4
- Test Mode : GSM1900 (EDGE) CH512 Lower Band Edge
- Power State : High

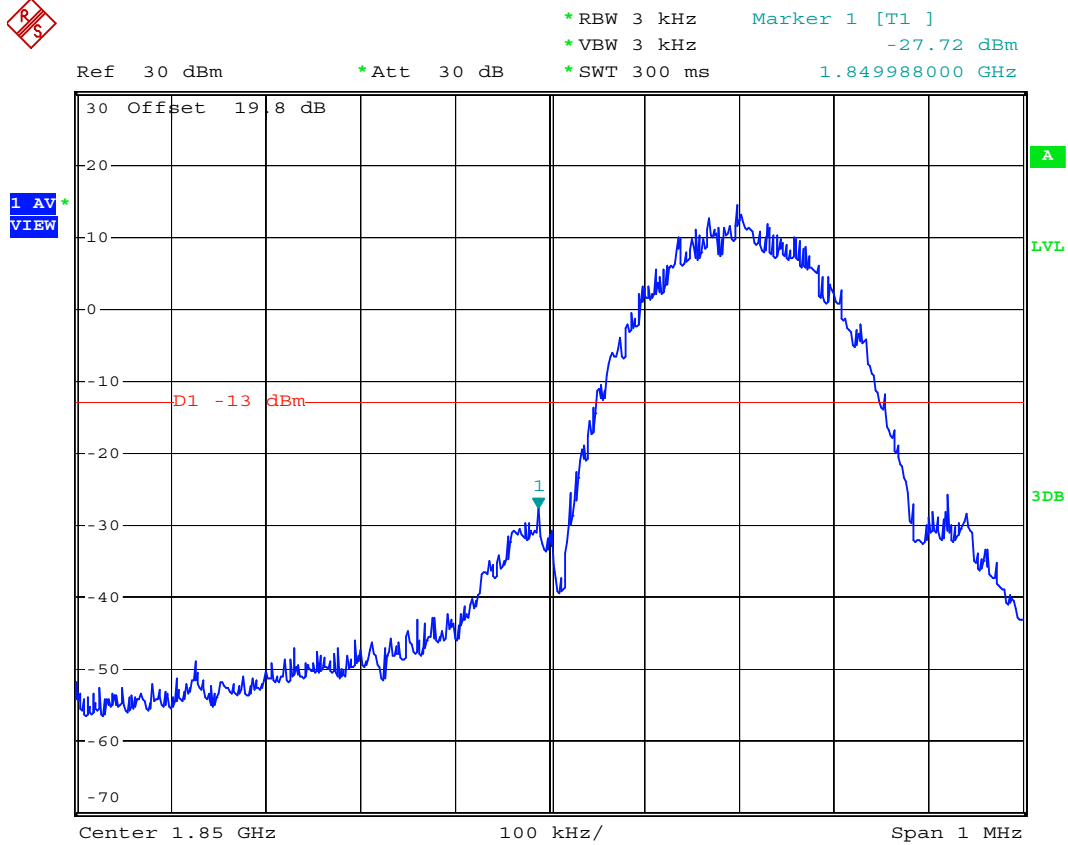

Date: 4.APR.2008 05:23:45




- Test Mode : GSM1900 (EDGE) CH512 99% Occupied Bandwidth
- Power State : High

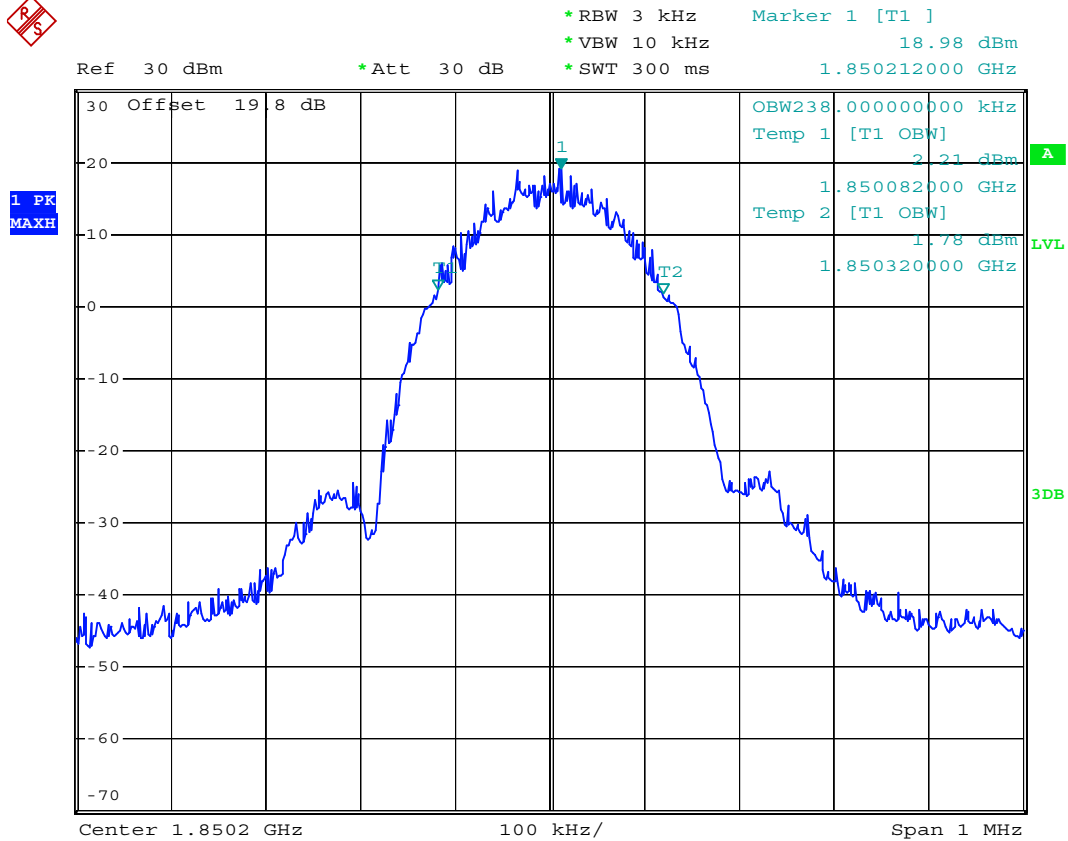

Date: 4.APR.2008 05:17:33




- Test Mode : GSM1900 (EDGE) CH661 99% Occupied Bandwidth
- Power State : High

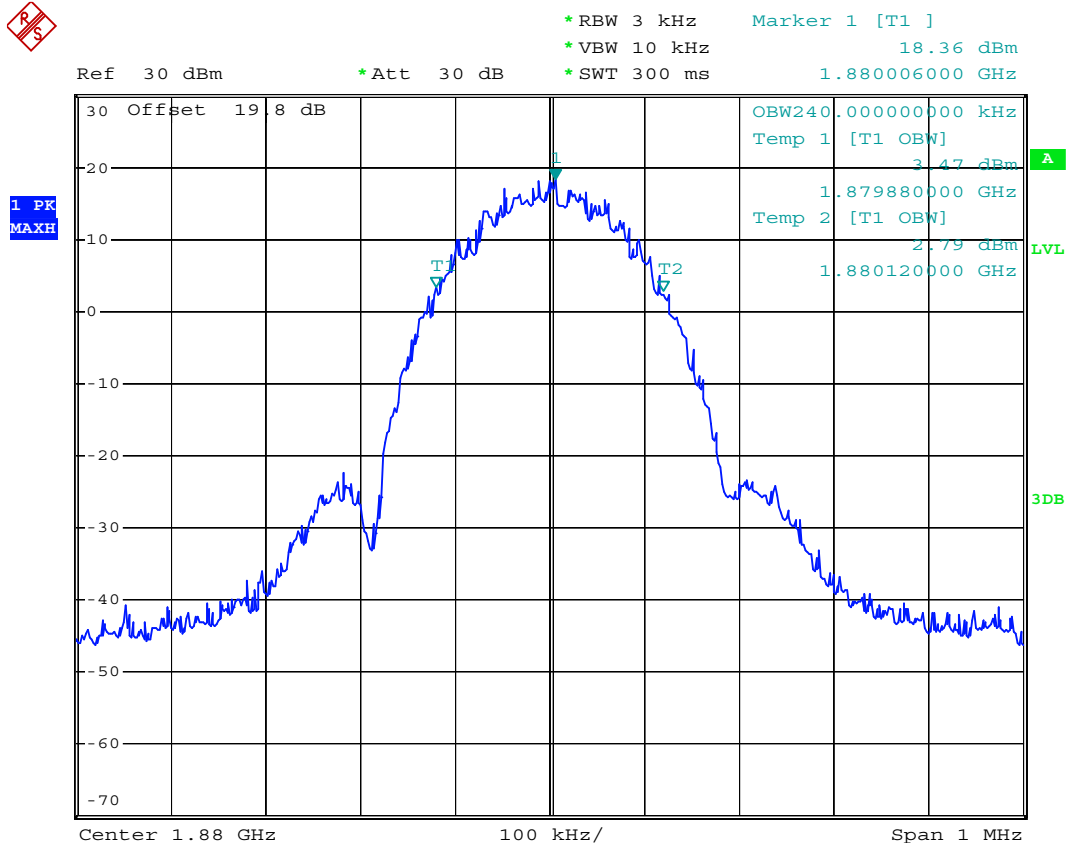

Date: 4.APR.2008 05:18:50




- Test Mode : GSM1900 (EDGE) CH810 99% Occupied Bandwidth
- Power State : High

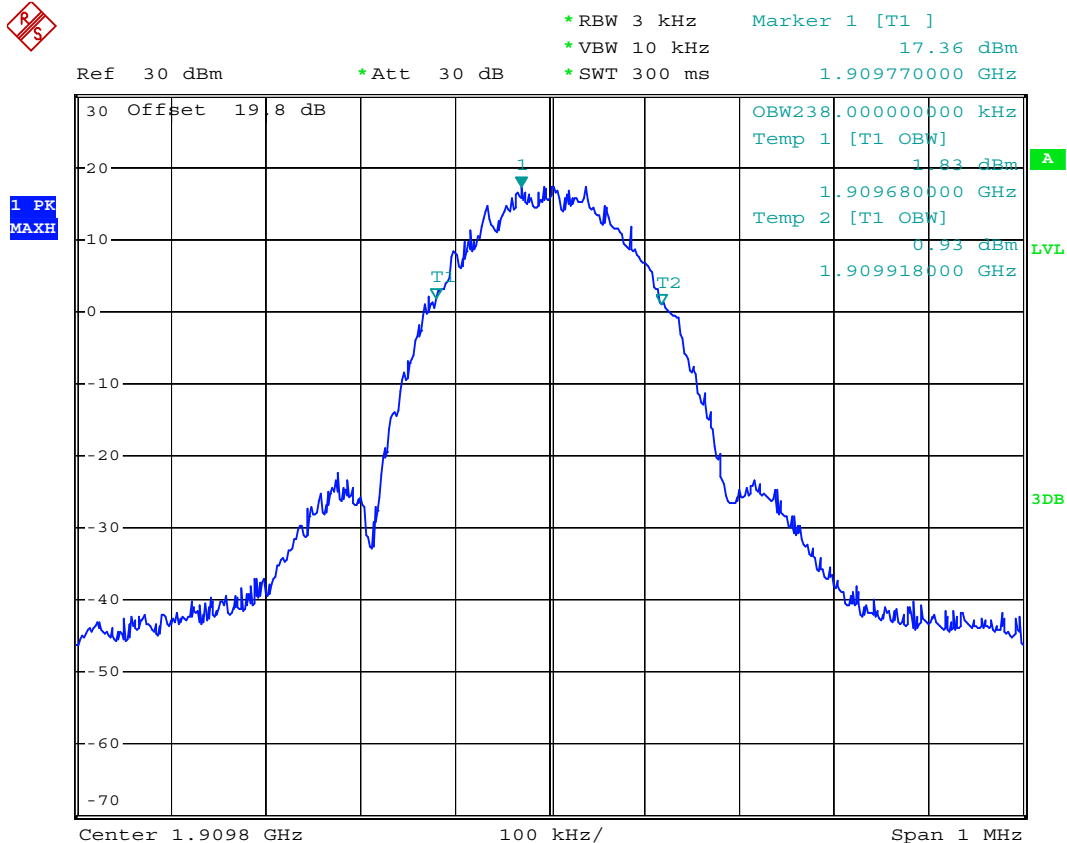

Date: 4.APR.2008 05:16:40




- Test Mode : GSM1900 (EDGE) CH512 26dB Bandwidth
- Power State : High

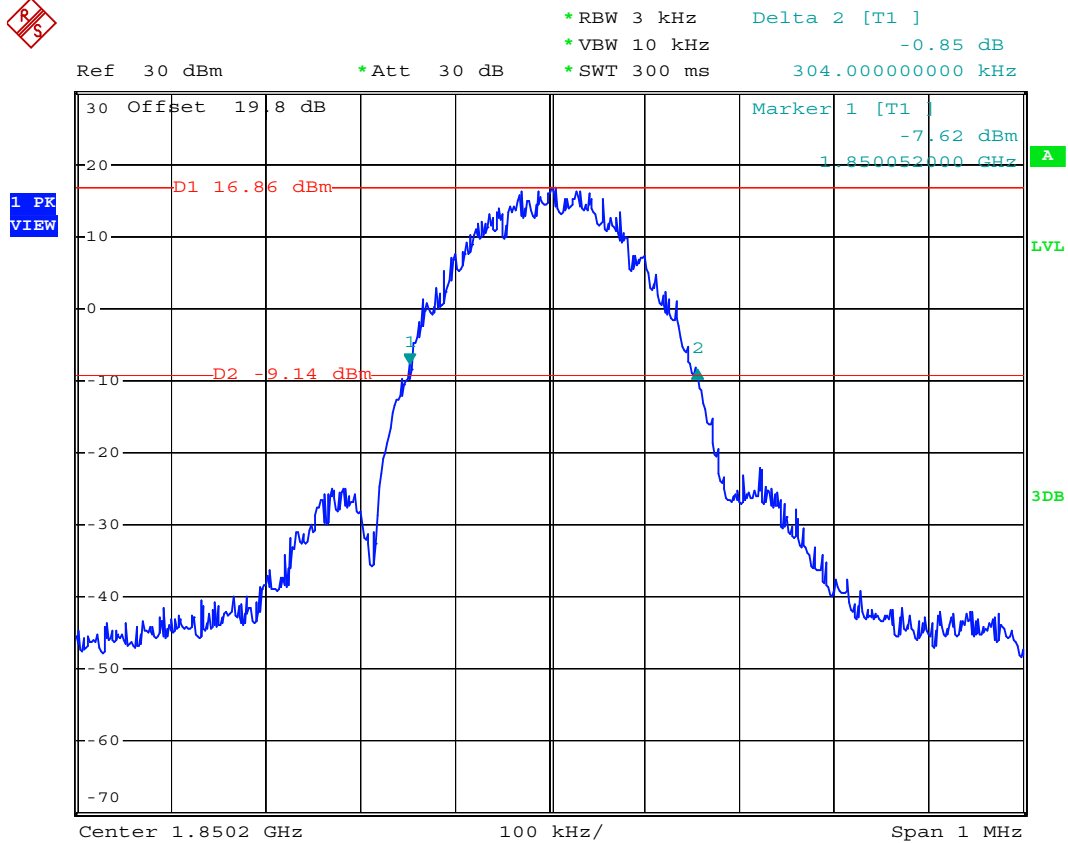

Date: 4.APR.2008 05:10:27




- Test Mode : GSM1900 (EDGE) CH661 26dB Bandwidth
- Power State : High

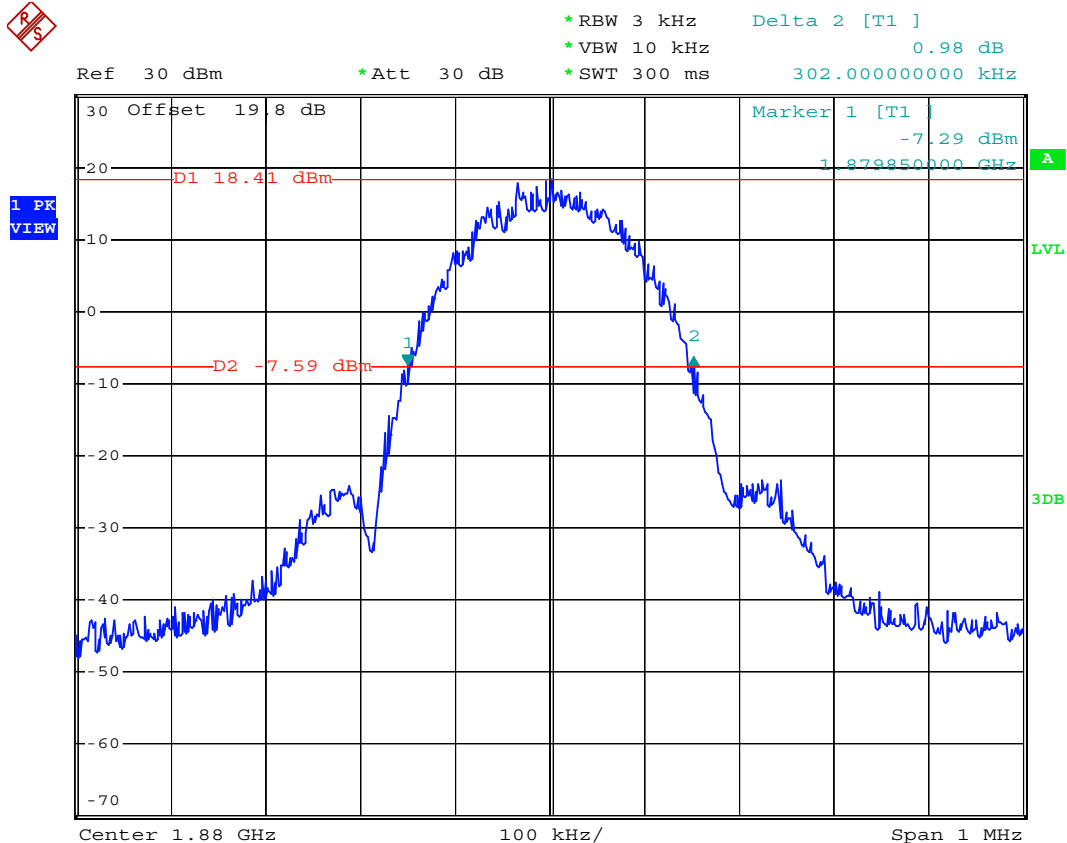

Date: 4.APR.2008 05:13:07




- Test Mode : GSM1900 (EDGE) CH810 26dB Bandwidth
- Power State : High

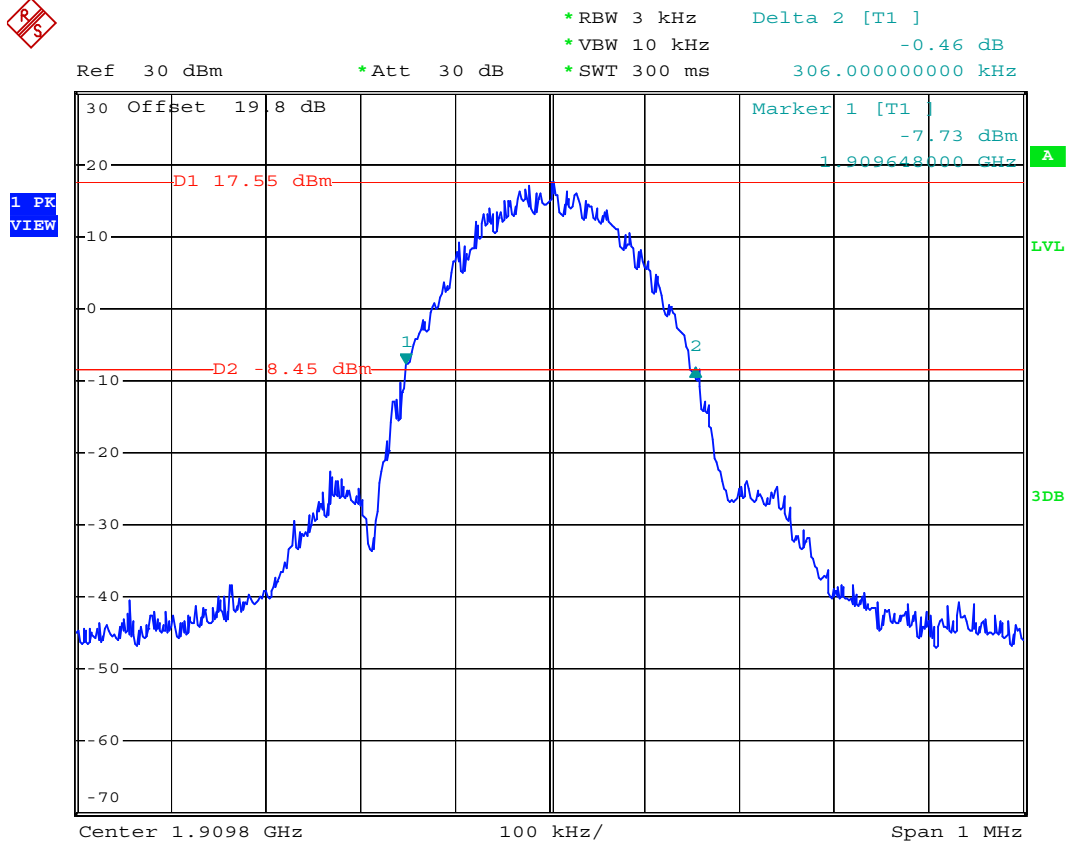

Date: 4.APR.2008 05:14:34



- Test Mode : GSM1900(EDGE) CH810 Higher Band Edge
- Power State : High

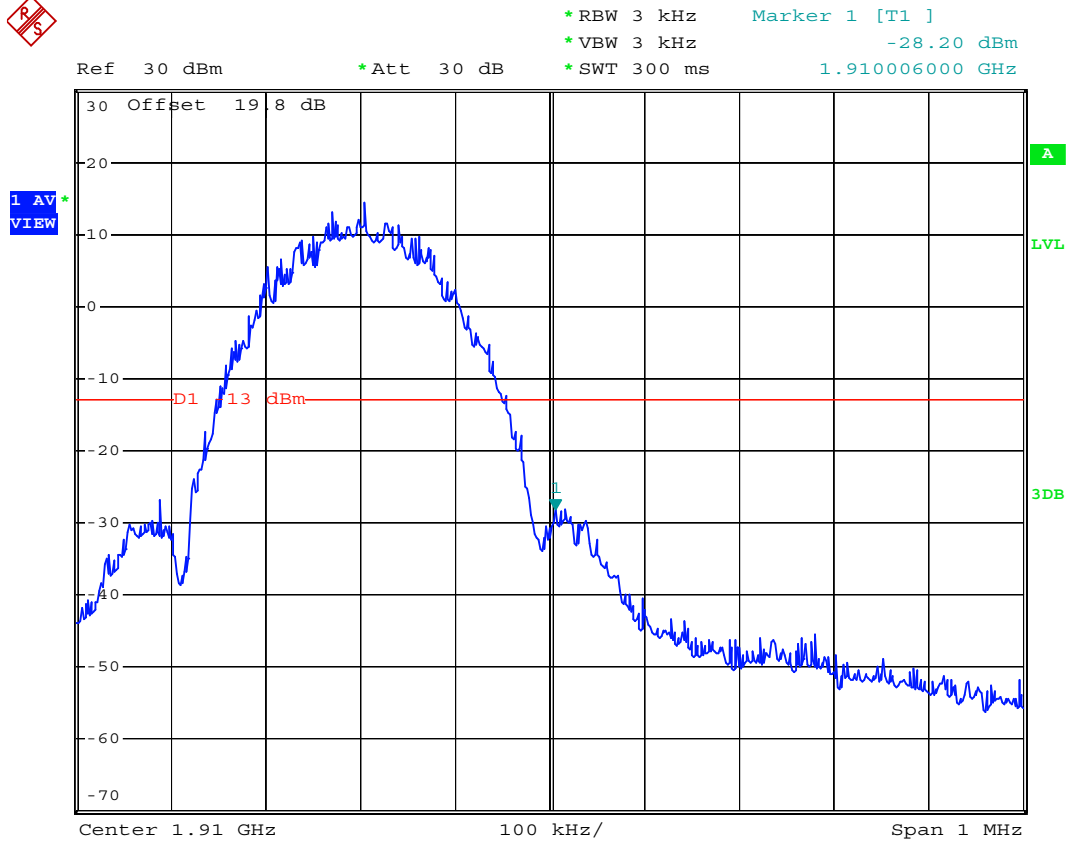

Date: 4.APR.2008 05:28:25

4.5 Conducted Emission


4.5.1 Measurement Instruments

As described in chapter 5 of this test report.

4.5.2 Test Procedure

- The EUT was connected to Spectrum Analyzer and Base Station via power divider.
- The middle channel for the highest RF power within the transmitting frequency was measured.
- The conducted spurious emission for the whole frequency range was taken.


4.5.3 Test Setup Layout

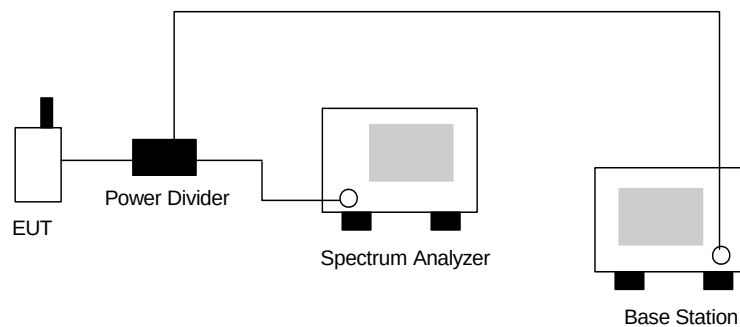



4.5.4 Test Result


- Mode 1
- Test Mode : GSM850 (GSM) CH189
- Frequency Range : 30M-1G

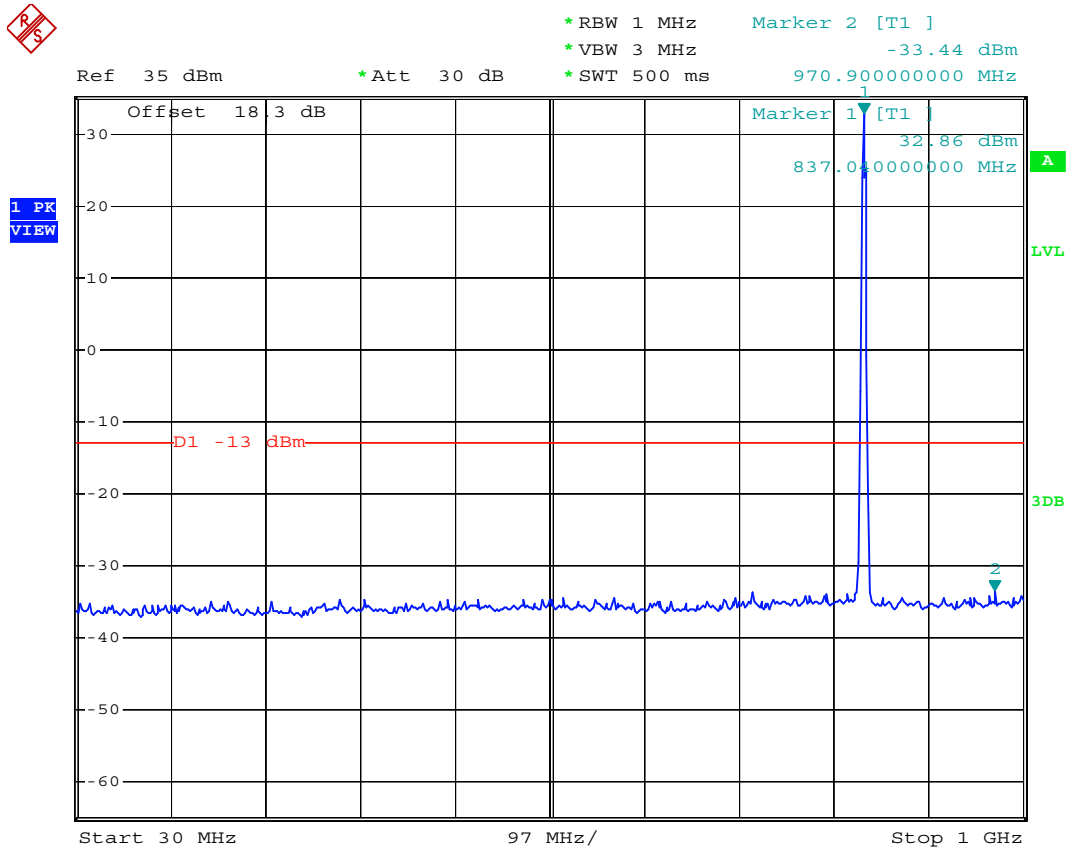

Date: 4.APR.2008 05:56:52




- Test Mode : GSM850 (GSM) CH189
- Frequency Range : 1G-3G

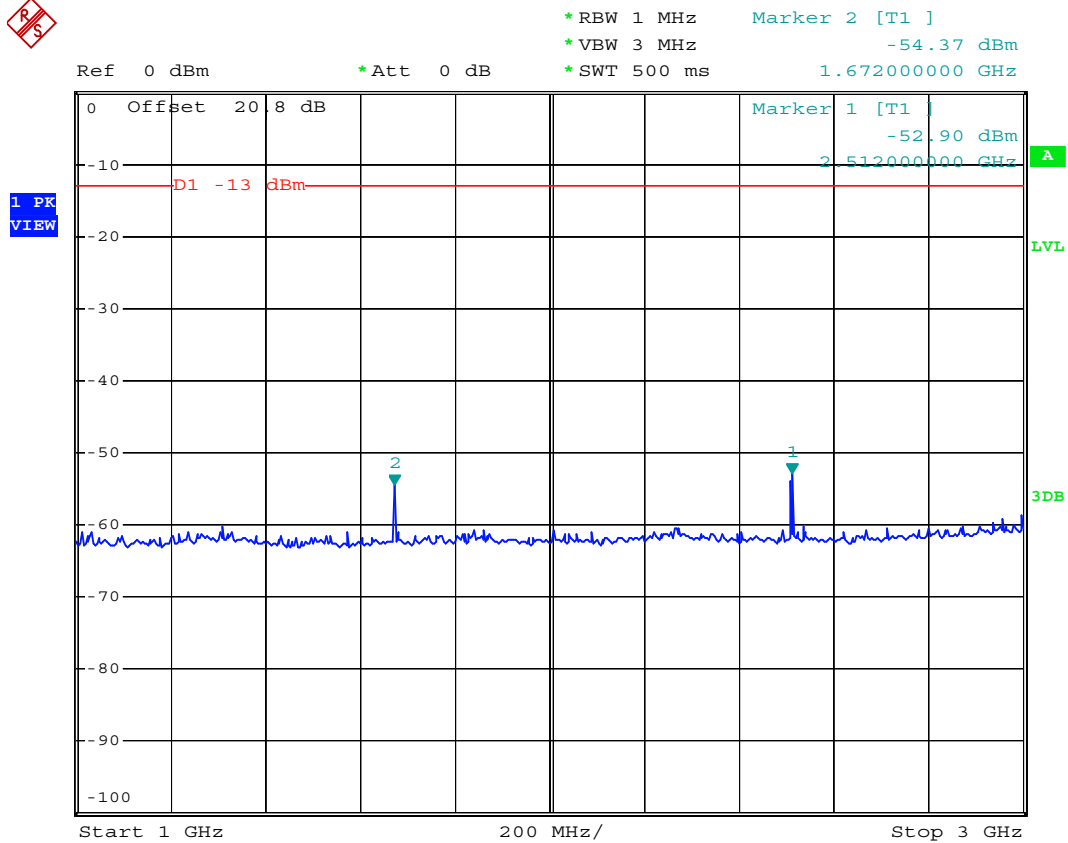

Date: 4.APR.2008 06:22:11




- Test Mode : GSM850 (GSM) CH189
- Frequency Range : 3G-7G

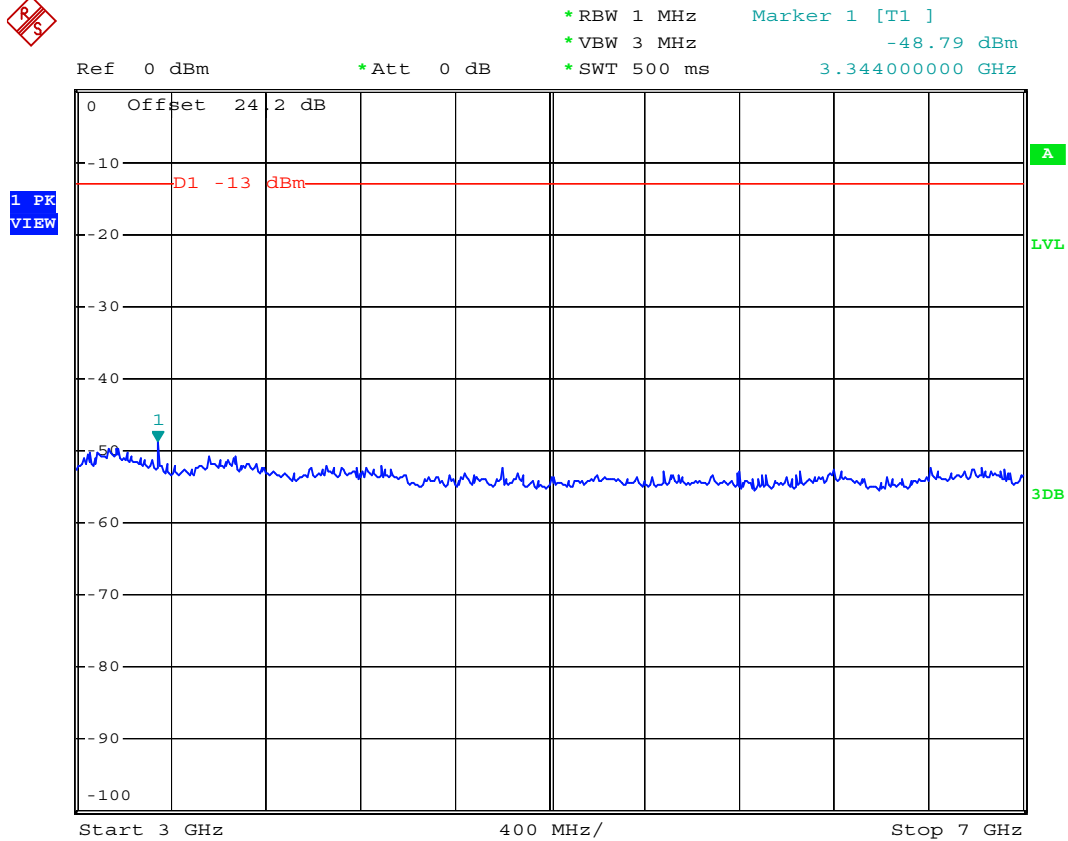

Date: 4.APR.2008 06:30:02




- Test Mode : GSM850 (GSM) CH189
- Frequency Range : 7G-9G

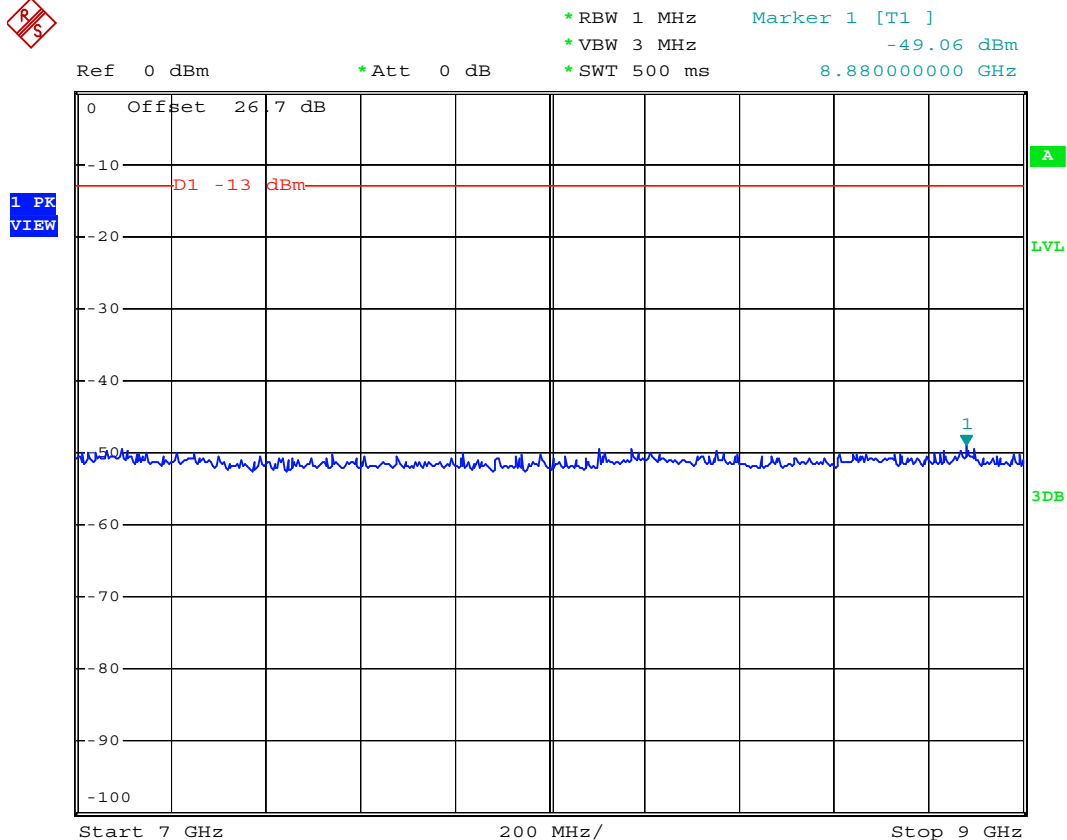

Date: 4.APR.2008 06:30:51




- Mode 2
- Test Mode : GSM850 (EDGE) CH189
- Frequency Range : 30M-1G

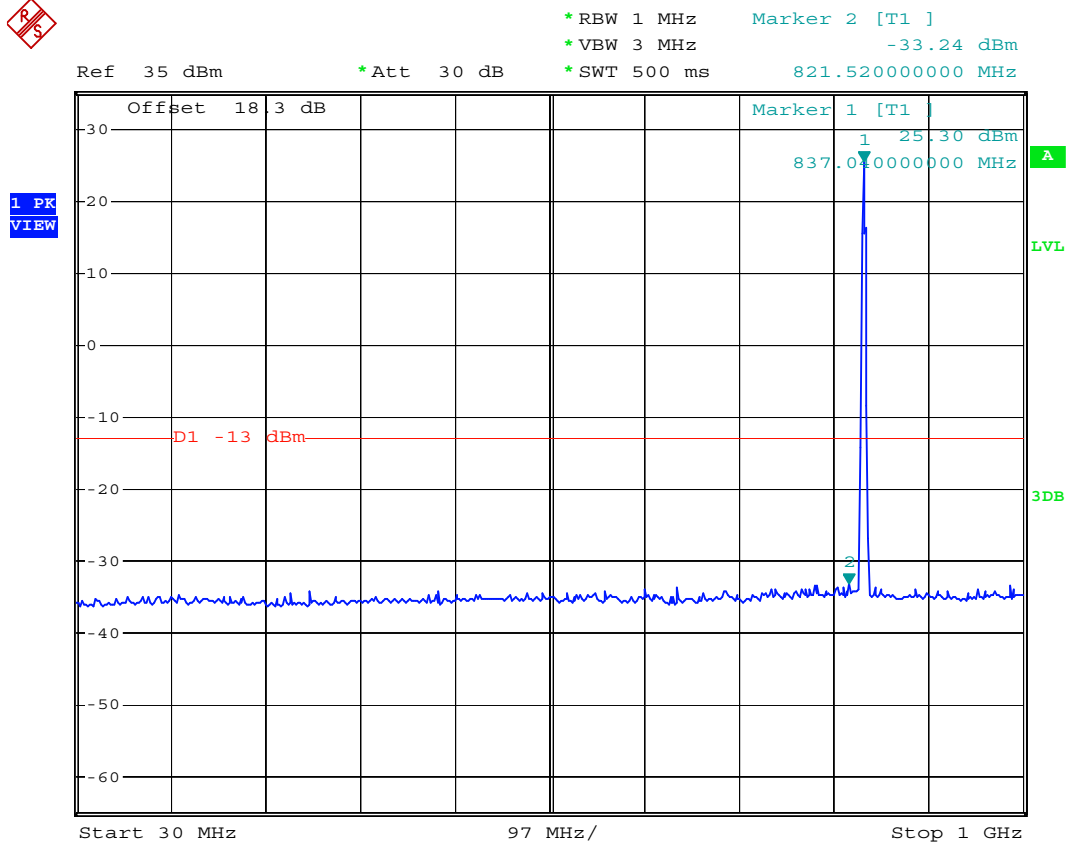

Date: 4.APR.2008 06:15:05




- Test Mode : GSM850 (EDGE) CH189
- Frequency Range : 1G-3G

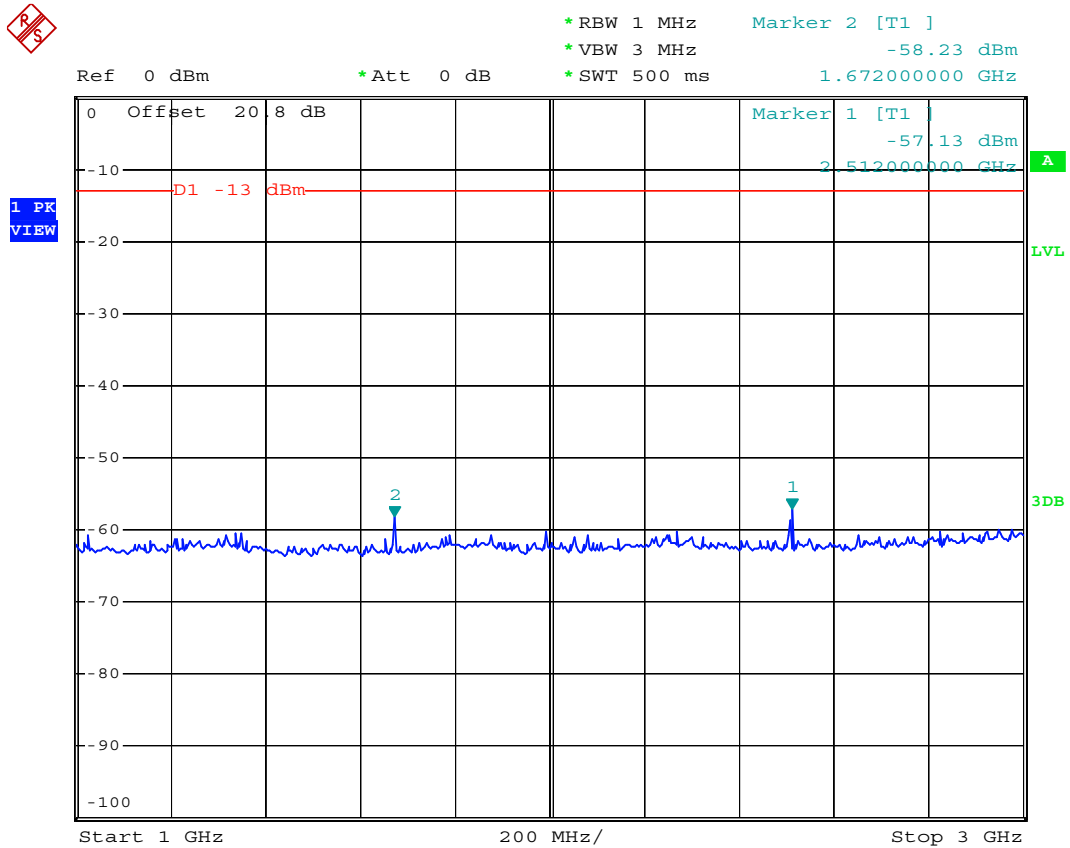

Date: 4.APR.2008 06:23:03




- Test Mode : GSM850 (EDGE) CH189
- Frequency Range : 3G-7G

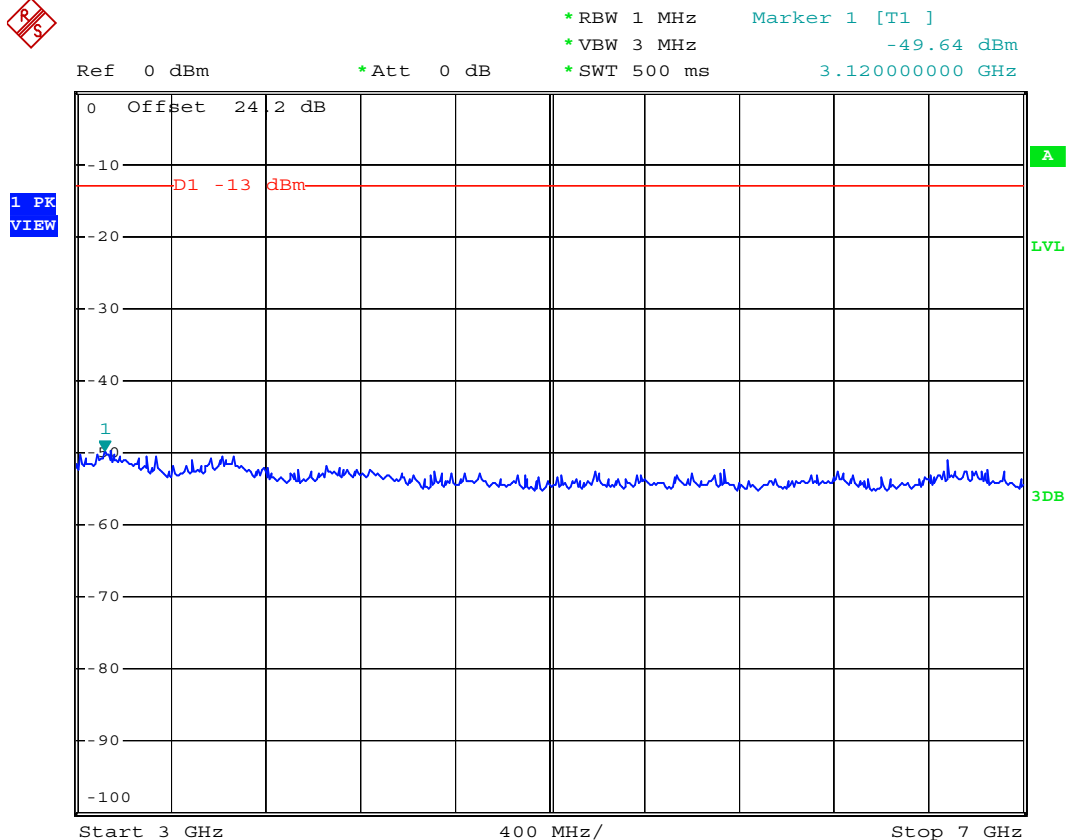

Date: 4.APR.2008 06:27:16




- Test Mode : GSM850 (EDGE) CH189
- Frequency Range : 7G-9G

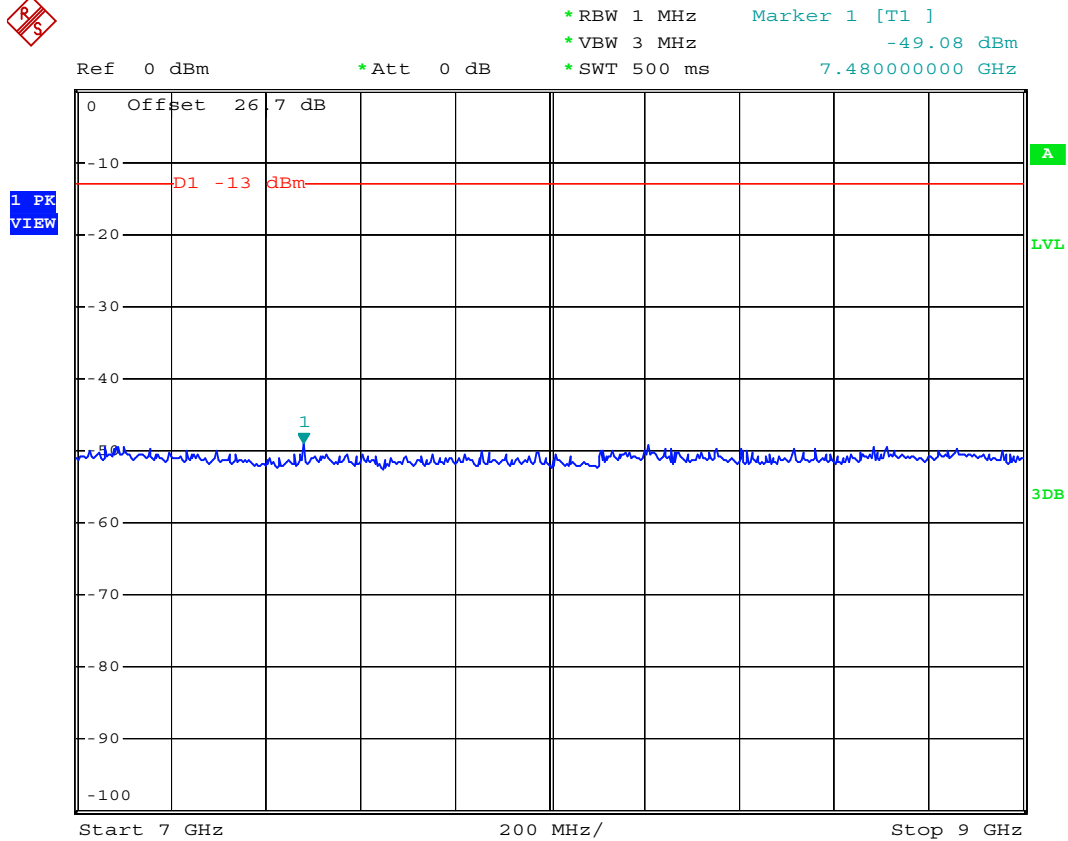

Date: 4.APR.2008 06:31:26




- Mode 3
- Test Mode : GSM1900 (GSM) CH661
- Frequency Range : 30M-1G

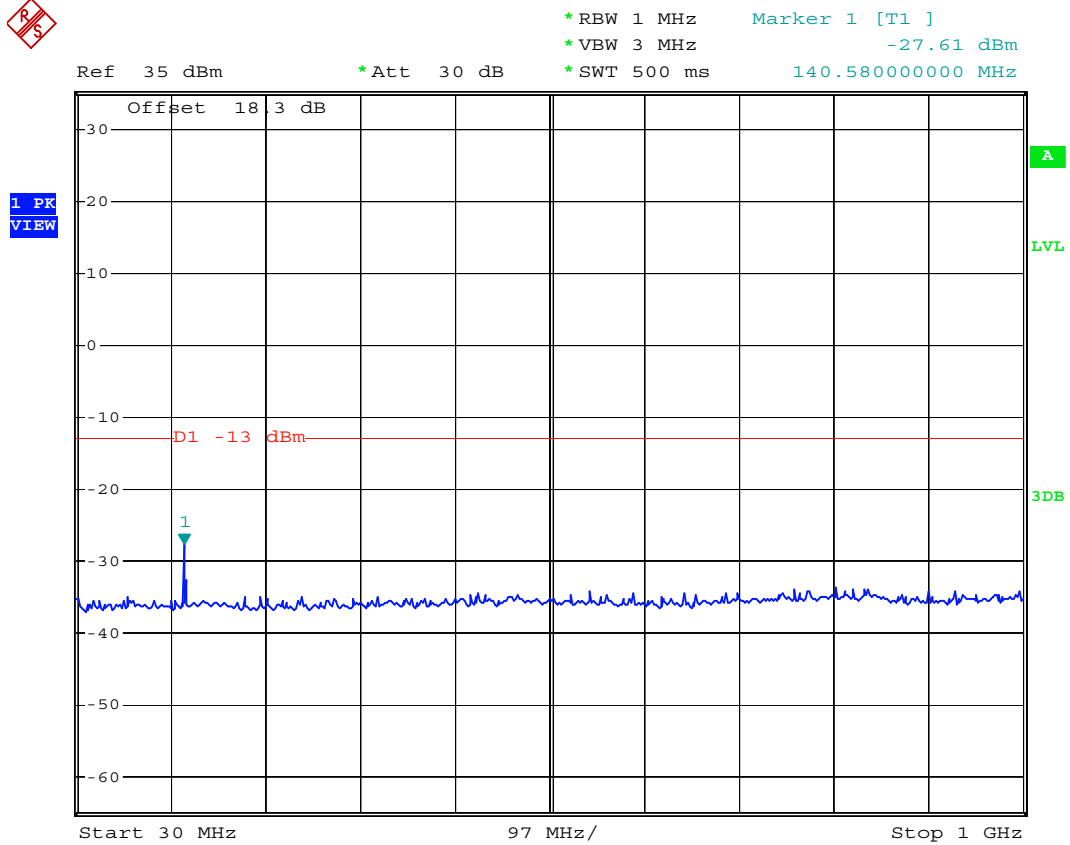

Date: 4.APR.2008 05:57:40




- Test Mode : GSM1900 (GSM) CH661
- Frequency Range : 1G-3G

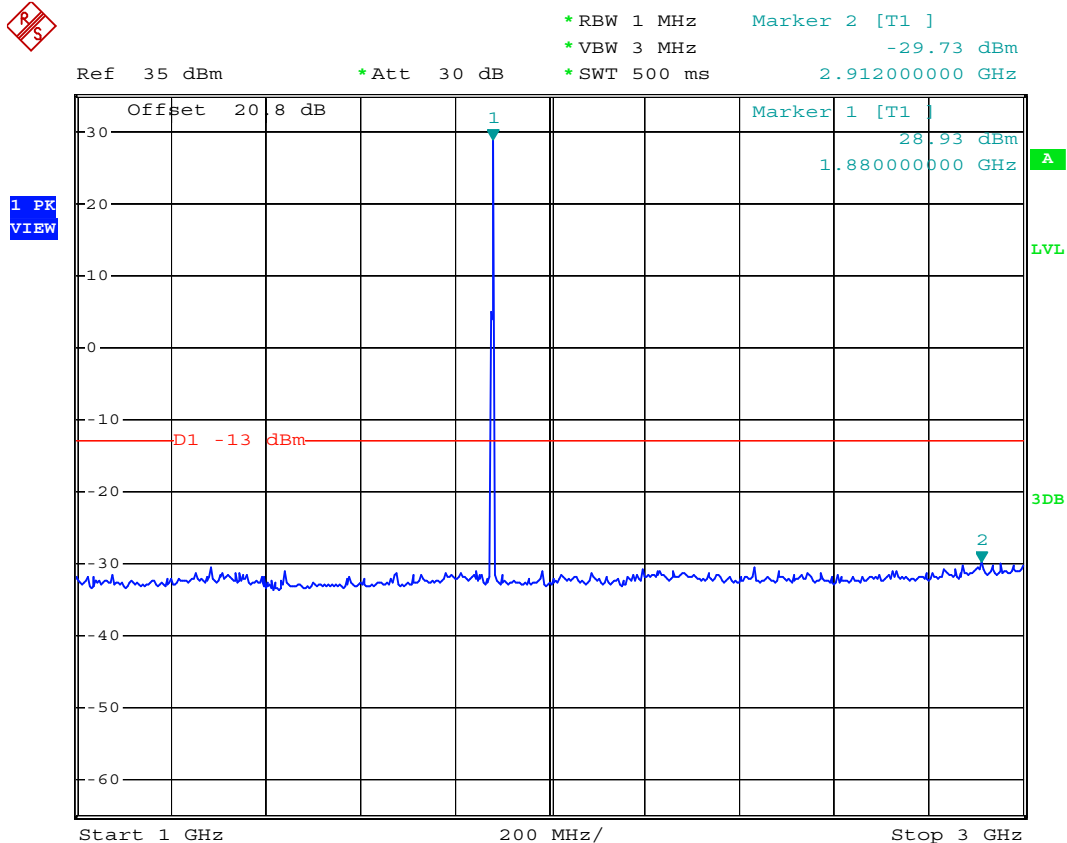


Date: 4.APR.2008 06:19:25



- Test Mode : GSM1900 (GSM) CH661
- Frequency Range : 3G-7G

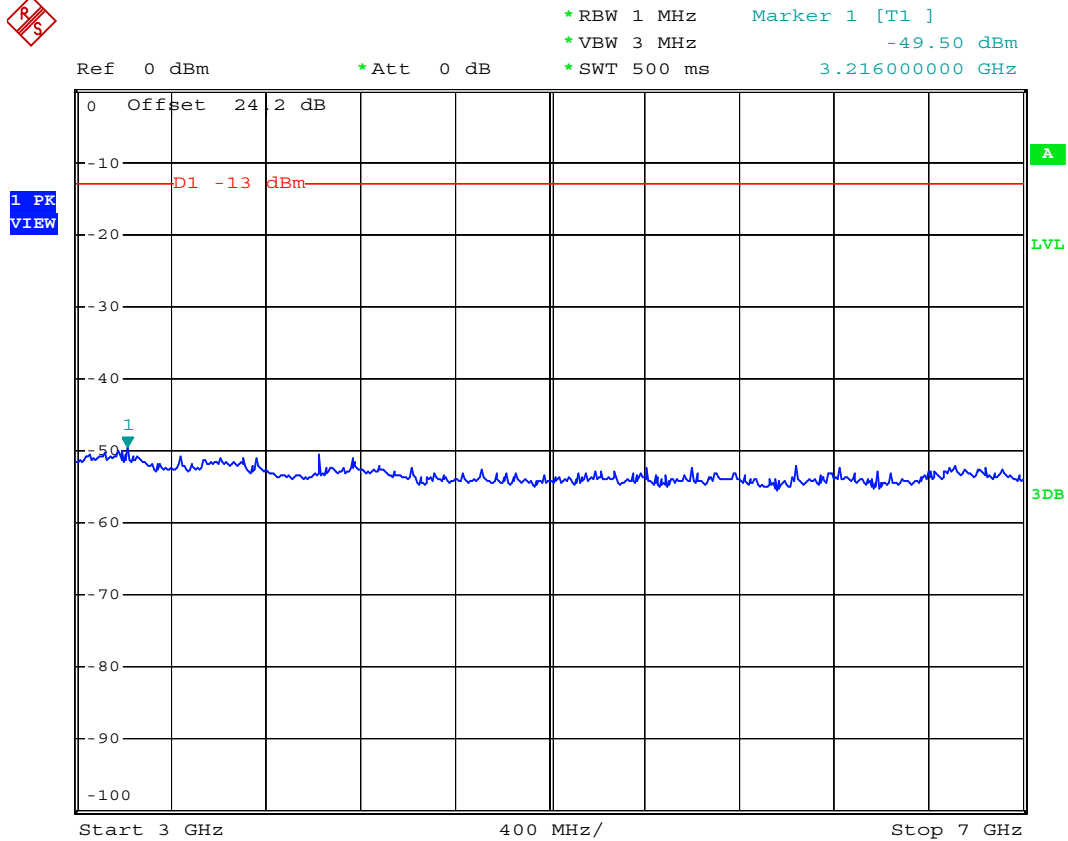


Date: 4.APR.2008 06:29:29

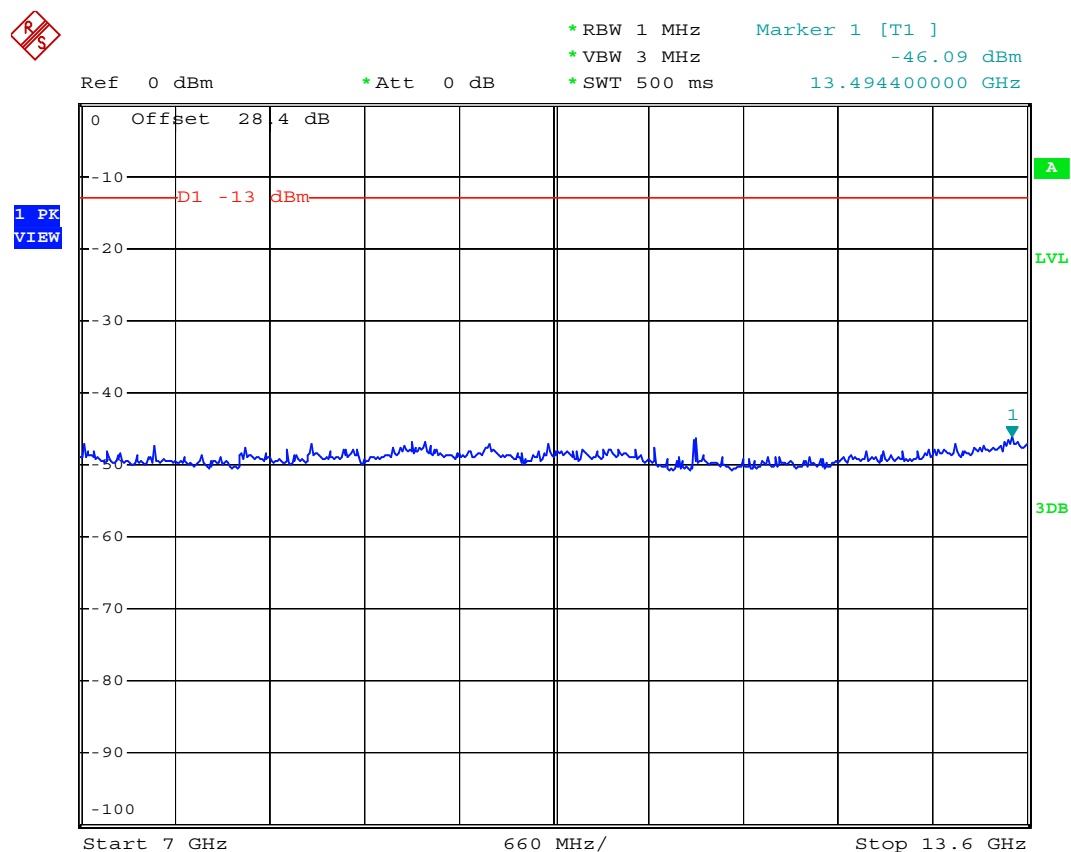


Date: 4.APR.2008 06:34:20




- Test Mode : GSM1900 (GSM) CH661
- Frequency Range : 13.6G-19.1G

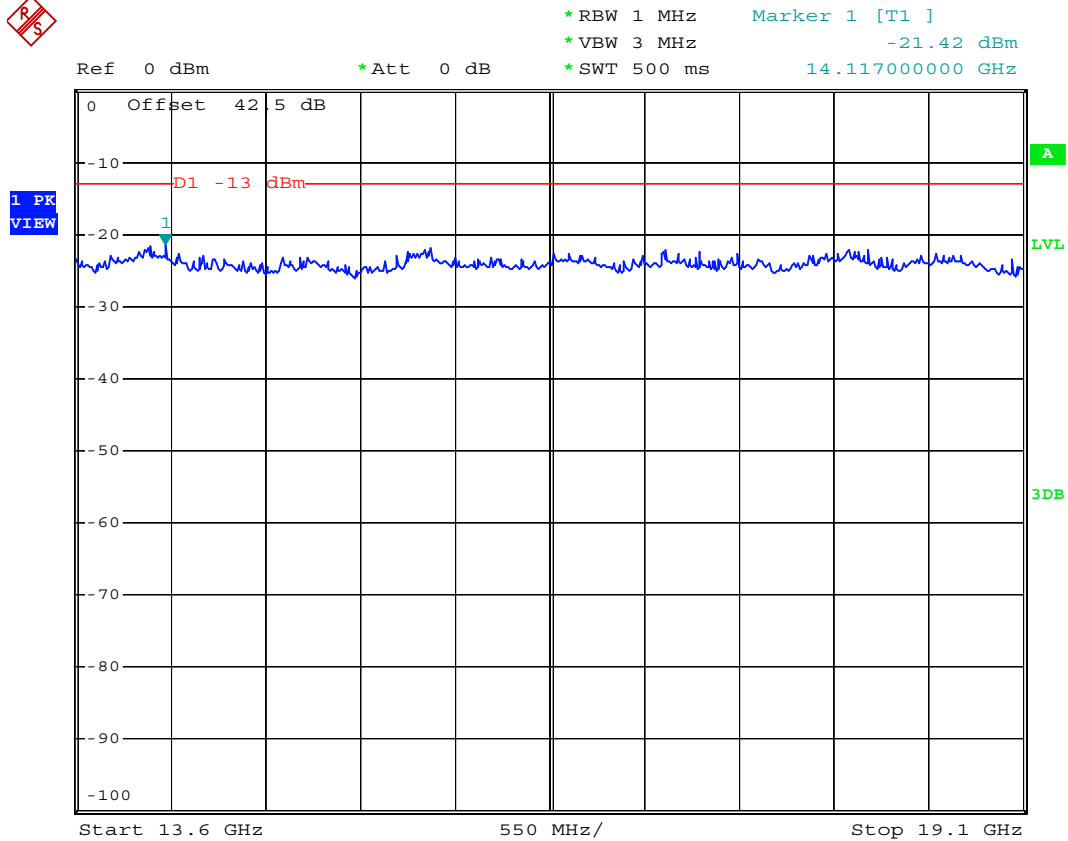


Date: 4.APR.2008 06:36:34








- Test Mode : GSM1900 (EDGE) CH661
- Frequency Range : 3G-7G

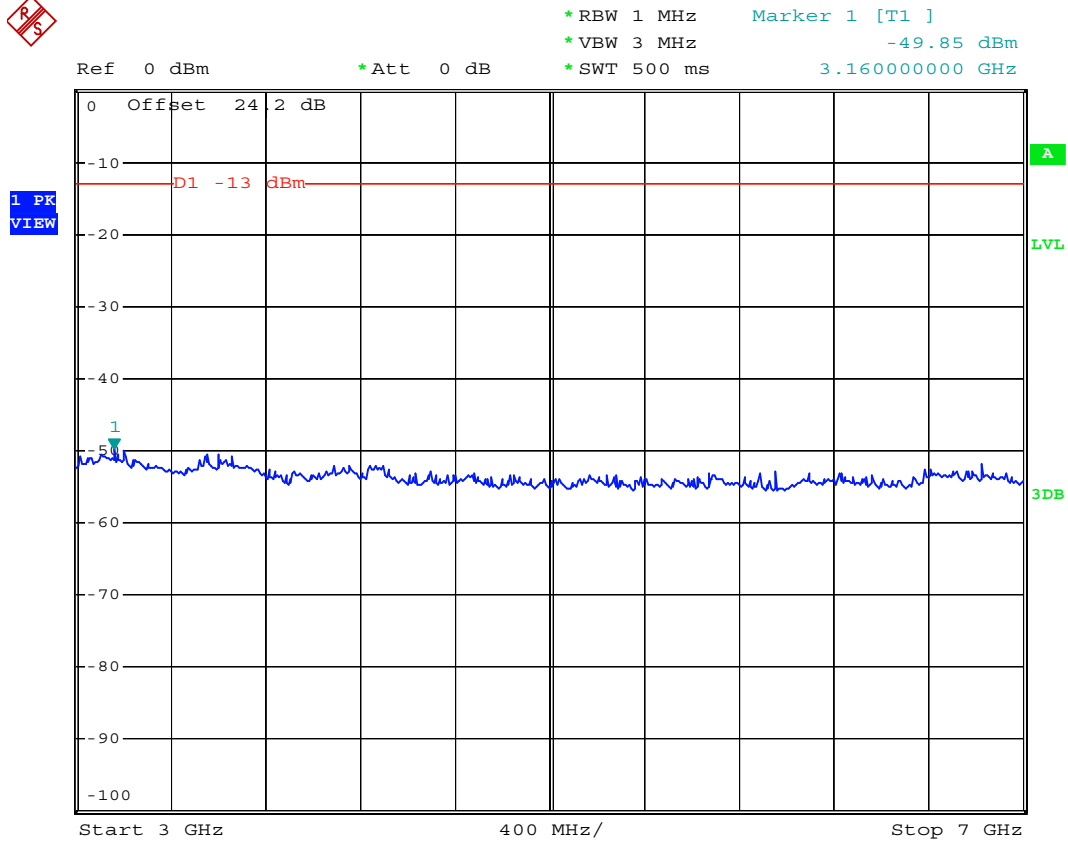

Date: 4.APR.2008 06:27:43




- Test Mode : GSM1900 (EDGE) CH661
- Frequency Range : 7G-13.6G

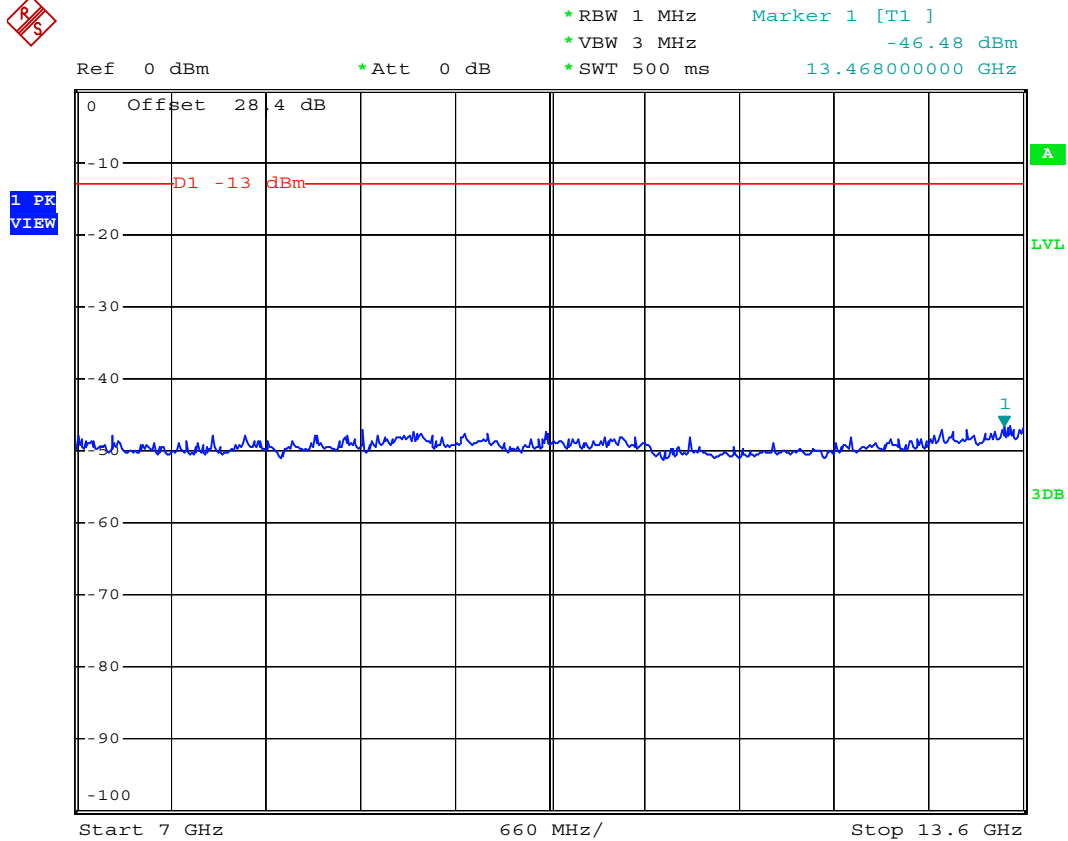

Date: 4.APR.2008 06:35:29



- Test Mode : GSM1900 (EDGE) CH661
- Frequency Range : 13.6G-19.1G

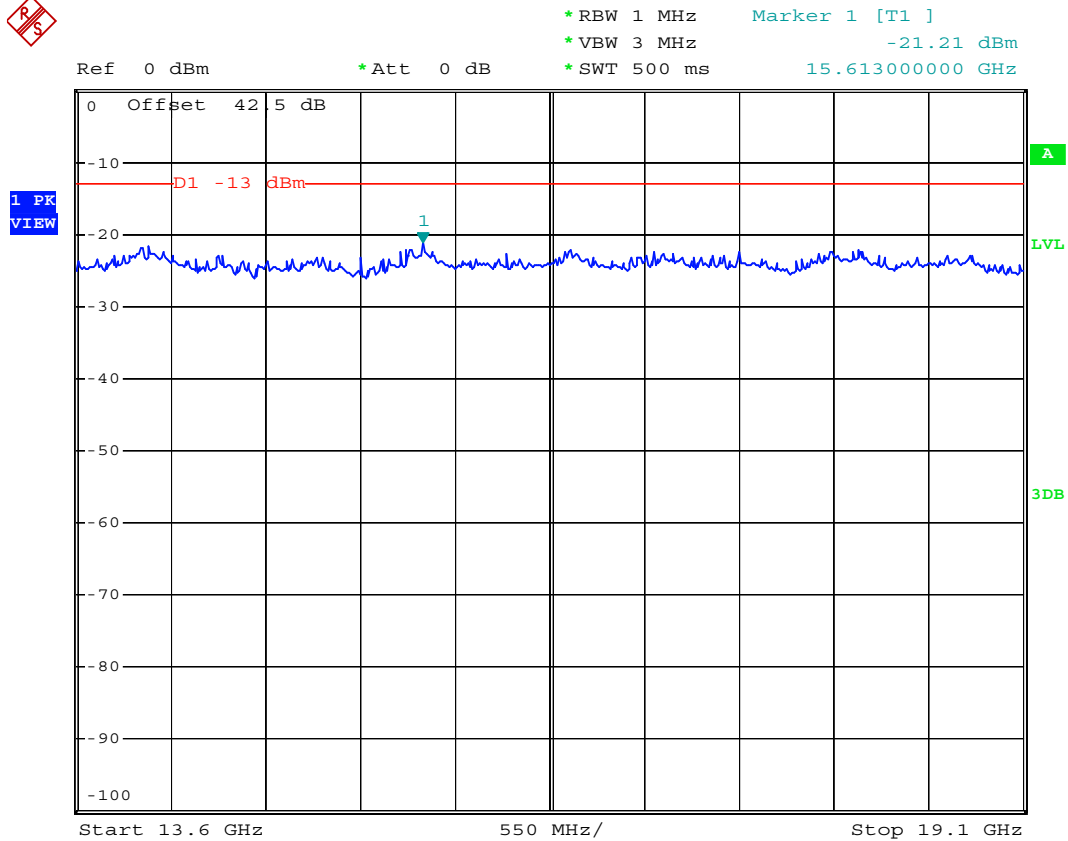

Date: 4.APR.2008 06:36:08

4.6 Field Strength of Spurious Radiation

Equivalent isotropic radiated Power Measurements by substitution method according to ANSI/TIA/EIA-603-C.


4.6.1 Measurement Instruments

As described in chapter 5 of this test report.

4.6.2 Test Procedure


- The EUT was placed on a rotatable wooden table with 0.8 meter about ground.
- The EUT was set 3 meters from the receiving antenna which was mounted on the antenna tower.
- The table was rotated 360 degrees to determine the position of the highest spurious emission.
- The height of the receiving antenna is varied between one meter and four meters to reach the maximum spurious emission for both horizontal and vertical polarizations.
- Taking the record of maximum spurious emission.
- A Horn antenna was substituted in place of the EUT and was driven by a signal generator.
- Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
- Taking the record of output power at antenna port.
- Repeat step 7 to step 8 for another polarization.
- Emission level (dBm) = output power + substitution Gain.

4.6.3 Test Setup Layout

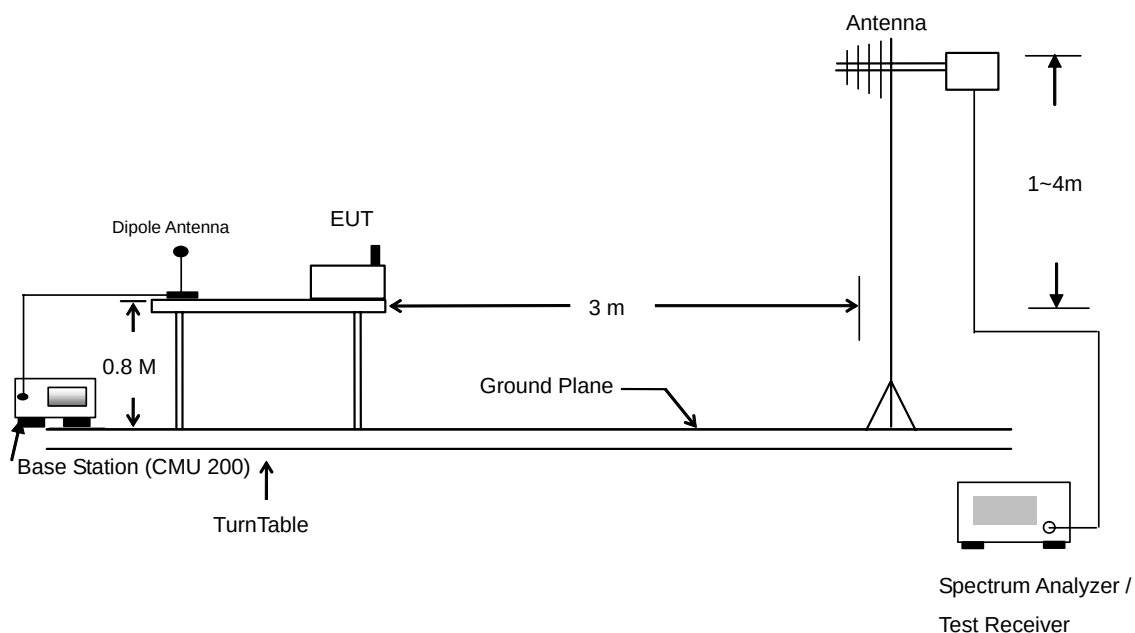

**4.6.4 Test Data**

- **Sample A**
- Mode 1
- Horizontal Polarization

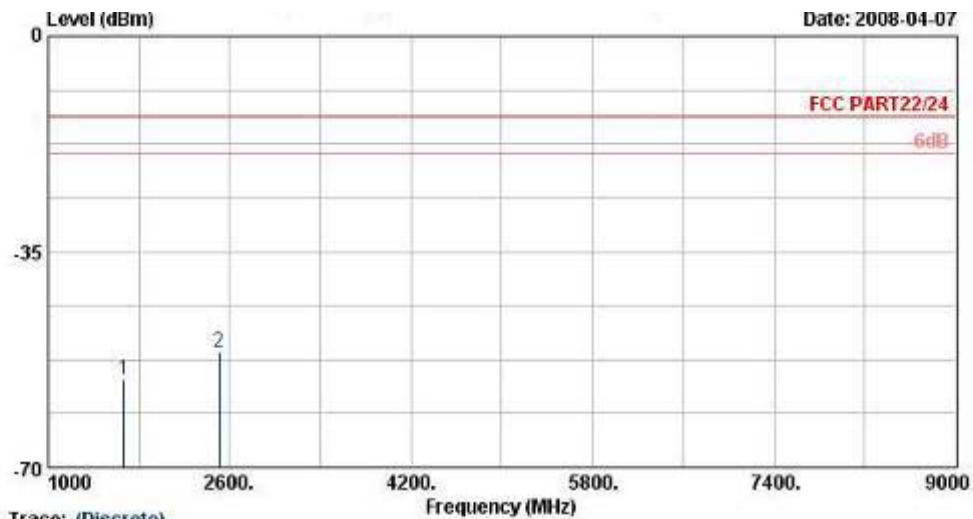


Site : 03CH07-HY
Condition : FCC PART22/24 HF-EIRP(080306) HORIZONTAL
EUT : MCS574 EV1 FCC submit with 1D 2D Scanner
and w/ camera w/o camera
Power : 120Vac/60Hz
Model : FG 840317
Mode : GSM 850 Link Mode ; Ch189 + Adaptor
Plane : E1

Frequency (MHz)	ERP (dBm)	Limit (dBm)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1669	-55.69	-13	-58.97	-54.7	3.39	4.55	H	Pass
2509	-51.14	-13	-58.57	-51.2	3.71	5.92	H	Pass

Remark : Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



▪ Vertical Polarization

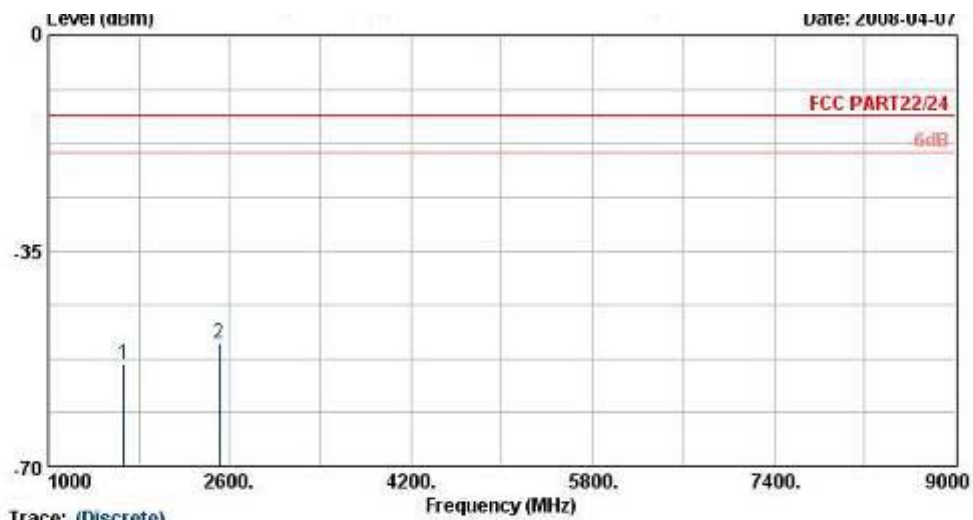

Trace: (Discrete)


Site : 03CH07-HY
Condition : FCC PART22/24 HF-EIRP(080306) VERTICAL
EUT : MCS574 EV1 FCC submit with 1D 2D Scanner
and w/ camera w/o camera
Power : 120Vac/60Hz
Model : FG 840317
Mode : GSM 850 Link Mode ; Ch189 + Adaptor
Plane : E1

Frequency (MHz)	ERP (dBm)	Limit (dBm)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1669	-53.28	-13	-58.21	-51.9	3.39	4.16	V	Pass
2509	-49.84	-13	-59.41	-49.7	3.71	5.72	V	Pass

Remark : Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



- **Sample A**
- **Mode 2**
- **Horizontal Polarization**

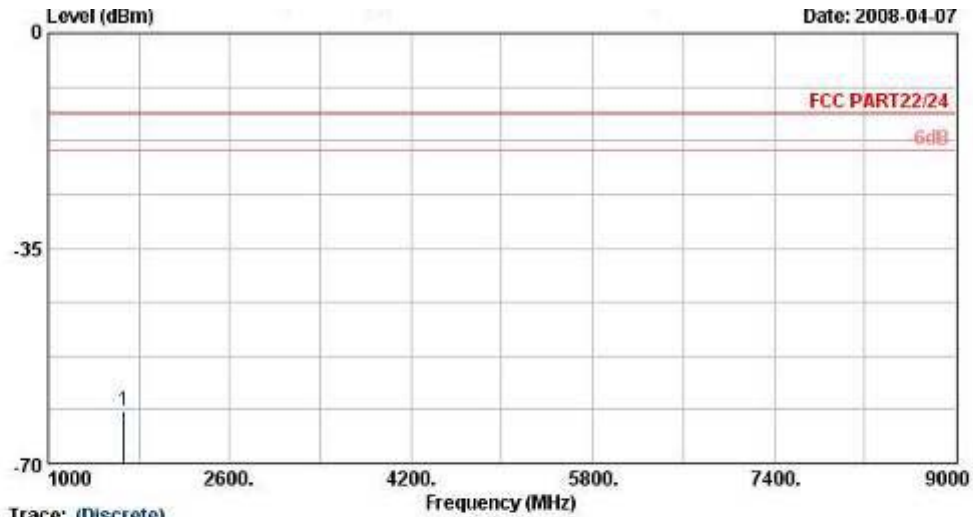

Trace: (Discrete)


Site : 03CH07-HY
Condition : FCC PART22/24 HF-EIRP(080306) HORIZONTAL
EUT : MC5574 EV1 FCC submit with 1D 2D Scanner
and w/ camera w/o camera
Power : 120Vac/60Hz
Model : FG 840317
Mode : EDGE Link Mode ; Ch189 + Adaptor
Plane : E1

Frequency (MHz)	ERP (dBm)	Limit (dBm)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1669	-61.29	-13	-62.2	-60.3	3.39	4.55	H	Pass

Remark : Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



▪ Vertical Polarization

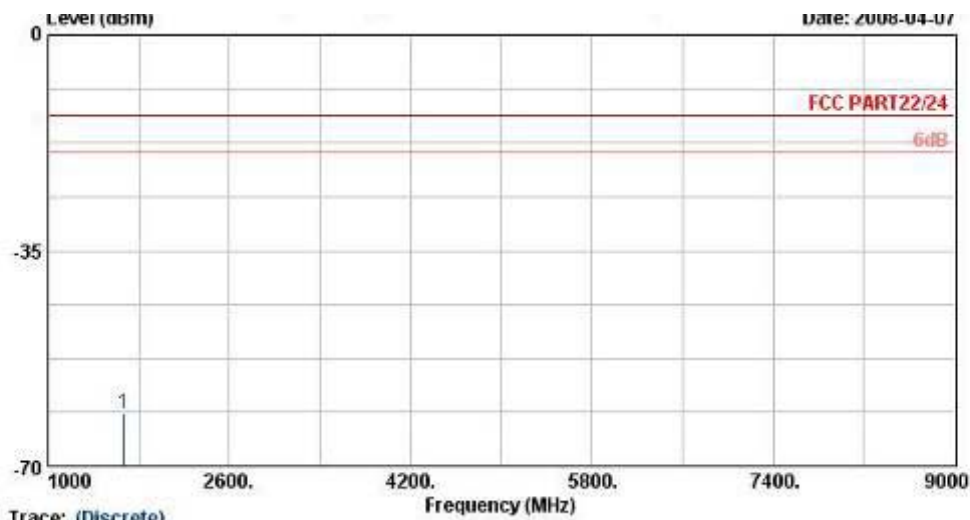


Site : 03CH07-HY
Condition : FCC PART22/24 HF-EIRP(080306) VERTICAL
EUT : MC5574 EV1 FCC submit with 1D 2D Scanner
and w/ camera w/o camera
Power : 120Vac/60Hz
Model : FG 840317
Mode : EDGE Link Mode ; Ch189 + Adaptor
Plane : E1

Frequency	ERP	Limit	SPA Reading	S.G. Power	TX Cable loss	TX Antenna Gain	Polarization	Result
(MHz)	(dBm)	(dBm)	(dBm)	(dBm)	(dB)	(dBi)	(H/V)	
1669	-61.48	-13	-64.09	-60.1	3.39	4.16	V	Pass

Remark : Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



- **Sample A**
- **Mode 3**
- **Horizontal Polarization**

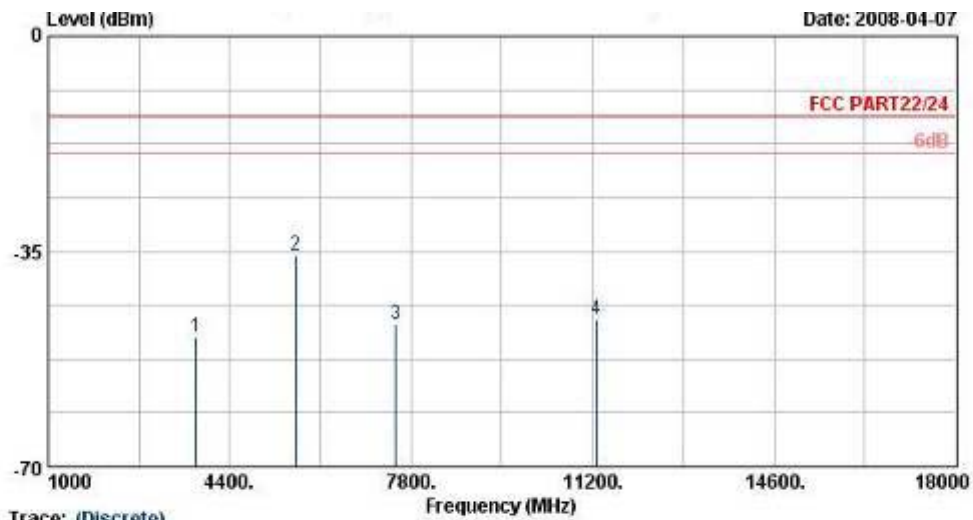


Site : 03CH07-HY
Condition : FCC PART22/24 HF-EIRP(080306) HORIZONTAL
EUT : MC5574 EV1 FCC submit with 1D 2D Scanner
and w/ camera w/o camera
Power : 120Vac/60Hz
Model : FG 840317
Mode : PCS 1900 Link Mode ; Ch661 + Adaptor
Plane : E1

Frequency (MHz)	ERP (dBm)	Limit (dBm)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-48.83	-13	-60.46	-52.2	4.03	7.40	H	Pass
5636	-35.66	-13	-54.27	-40.6	3.87	8.81	H	Pass
7520	-46.82	-13	-65.53	-50.7	5.83	9.71	H	Pass
11280	-46.02	-13	-68.07	-48.3	8.48	10.76	H	Pass

Remark : Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



▪ Vertical Polarization

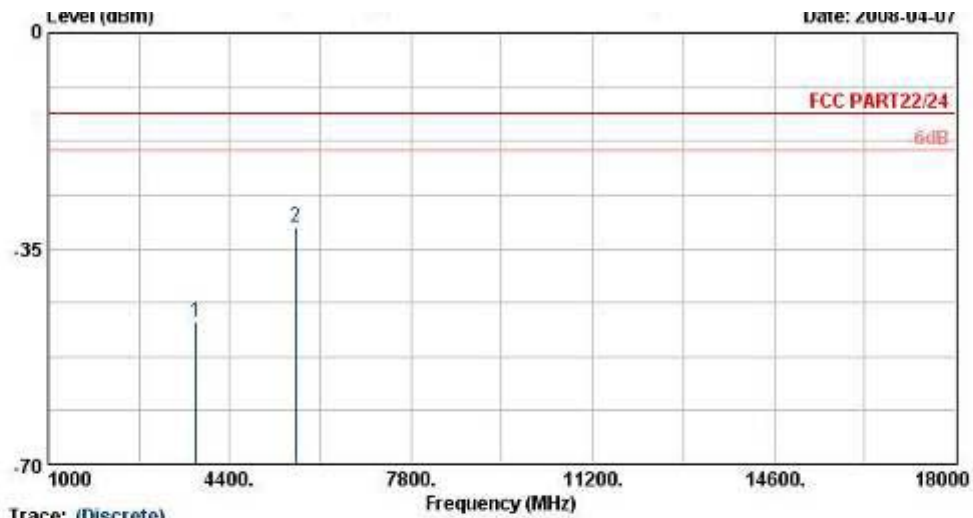


Site : 03CH07-HY
Condition : FCC PART22/24 HF-EIRP(080306) VERTICAL
EUT : MCS574 EV1 FCC submit with 1D 2D Scanner
and w/ camera w/o camera
Power : 120Vac/60Hz
Model : FG 840317
Mode : PCS 1900 Link Mode ; Ch661 + Adaptor
Plane : E1

Frequency (MHz)	ERP (dBm)	Limit (dBm)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-46.72	-13	-60.71	-50.6	4.03	7.91	V	Pass
5636	-31.40	-13	-51.39	-37.3	3.87	9.77	V	Pass

Remark : Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



- **Sample A**
- Mode 4
- Horizontal Polarization

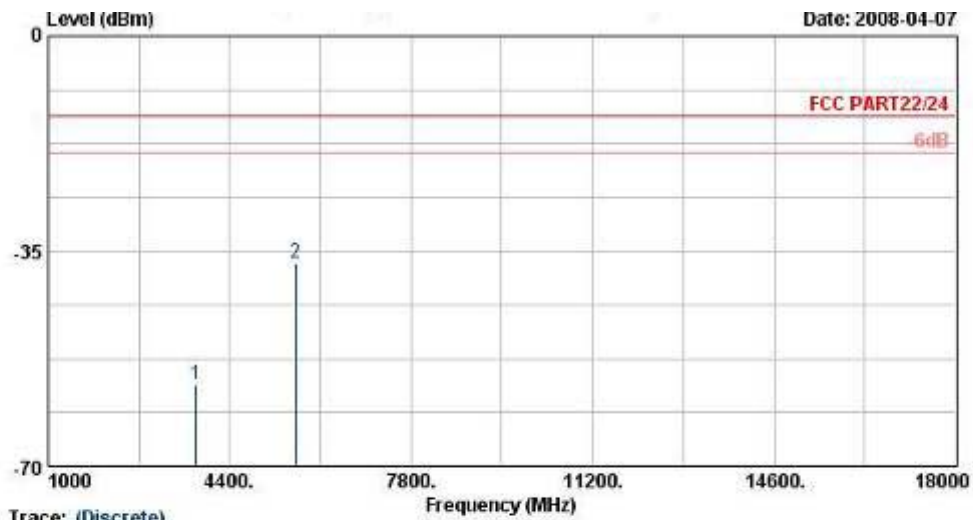


Site : 03CH07-HY
Condition : FCC PART22/24 HF-EIRP(080306) HORIZONTAL
EUT : MC5574 EV1 FCC submit with 1D 2D Scanner
and w/ camera w/o camera
Power : 120Vac/60Hz
Model : FG 840317
Mode : EDGE Link Mode ; Ch661 + Adaptor
Plane : E1

Frequency (MHz)	ERP (dBm)	Limit (dBm)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-56.63	-13	-65	-60	4.03	7.40	H	Pass
5636	-37.06	-13	-55.54	-42	3.87	8.81	H	Pass

Remark : Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



▪ Vertical Polarization

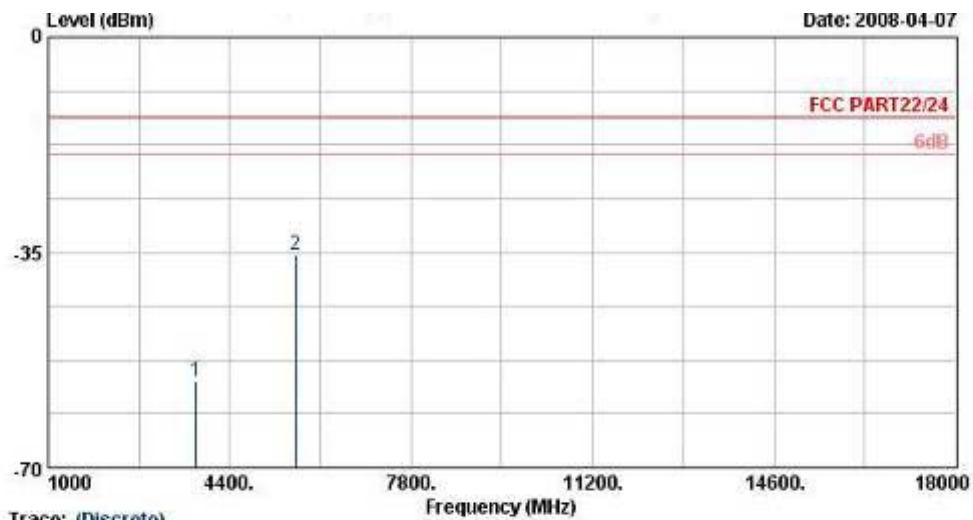


Site : 03CH07-HY
Condition : FCC PART22/24 HF-EIRP(080306) VERTICAL
EUT : MC5574 EV1 FCC submit with 1D 2D Scanner
and w/ camera w/o camera
Power : 120Vac/60Hz
Model : FG 840317
Mode : EDGE Link Mode ; Ch561 + Adaptor
Plane : E1

Frequency (MHz)	ERP (dBm)	Limit (dBm)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-55.82	-13	-65.32	-59.7	4.03	7.91	V	Pass
5636	-35.30	-13	-54.64	-41.2	3.87	9.77	V	Pass

Remark : Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



- **Sample A**
- **Mode 5**
- **Horizontal Polarization**

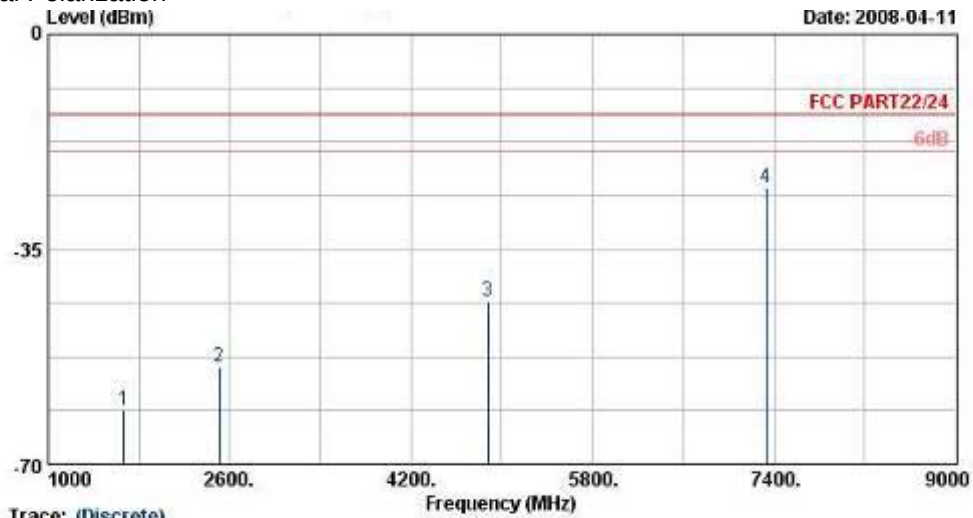


Site : 03CH07-HY
Condition : FCC PART22/24 HF-EIRP(080306) HORIZONTAL
EUT : MCS574 EV1 FCC submit with 1D 2D Scanner
and w/ camera w/o camera
Power : 120Vac/60Hz
Model : FG 840317
Mode : GSM 850 Link Mode ; Ch189 + Adaptor
+ BT Tx_Ch39
Plane : E1

Frequency (MHz)	ERP (dBm)	Limit (dBm)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1669	-61.09	-13	-64.08	-60.1	3.39	4.55	H	Pass
2509	-54.14	-13	-61.69	-54.2	3.71	5.92	H	Pass
4875	-43.35	-13	-58.31	-47.1	2.61	8.51	H	Pass
7330	-24.96	-13	-43.88	-26.3	6.22	9.71	H	Pass

Remark : Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



Vertical Polarization

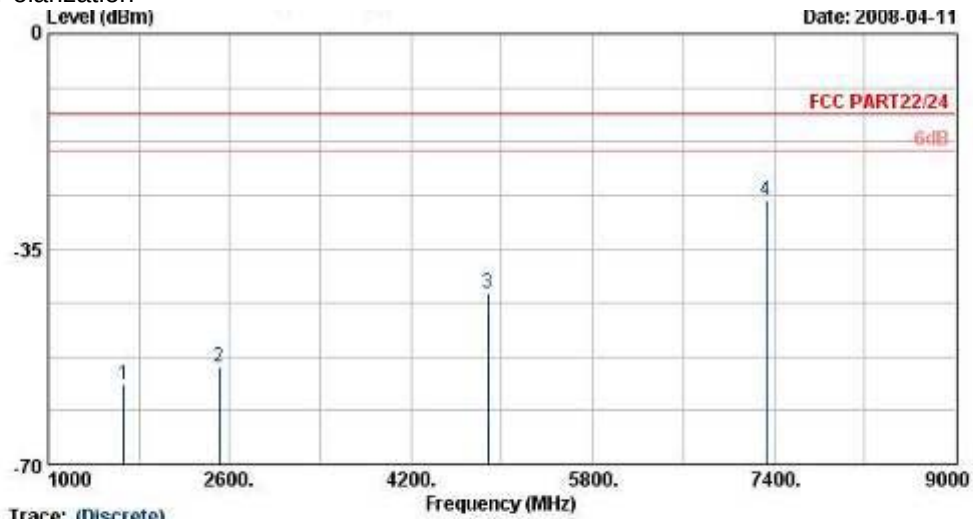


Site : 03CH07-HY
Condition : FCC PART22/24 HF-EIRP(080306) VERTICAL
EUT : MC5574 EV1 FCC submit with 1D 2D Scanner
and w/ camera w/o camera
Power : 120Vac/60Hz
Model : FG 840317
Mode : GSM 850 Link Mode ; Ch189 + Adaptor
+ BT Tx_Ch39
Plane : E1

Frequency (MHz)	ERP (dBm)	Limit (dBm)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1666	-56.98	-13	-60.87	-55.6	3.39	4.16	V	Pass
2509	-54.14	-13	-62.75	-54.0	3.71	5.72	V	Pass
4875	-42.04	-13	-59.3	-46.4	2.61	9.12	V	Pass
7330	-26.96	-13	-46.38	-29.4	6.22	10.81	V	Pass

Remark : Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



- **Sample A**
- **Mode 6**
- **Horizontal Polarization**

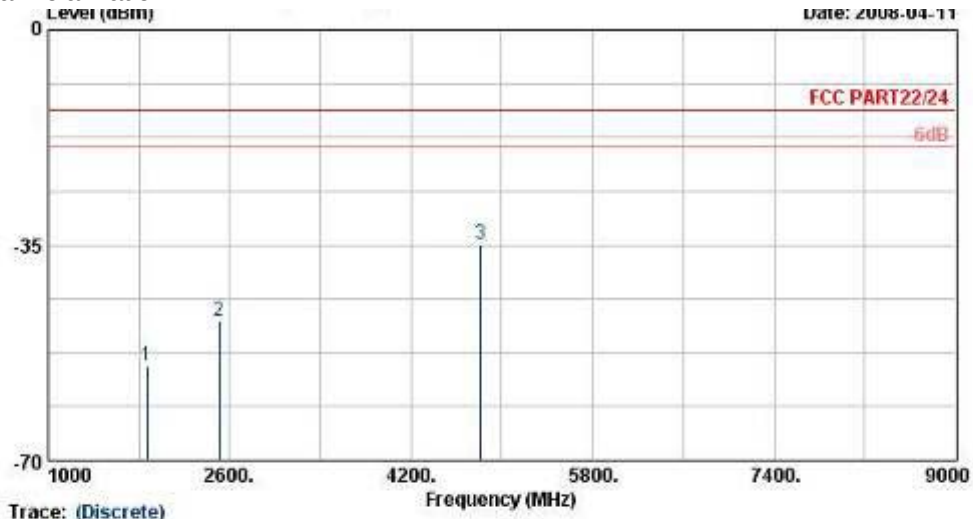


Site : 03CH07-HY
Condition : FCC PART22/24 HF-EIRP(080306) HORIZONTAL
EUT : MCS574 EV1 FCC submit with 1D 2D Scanner
and w/ camera w/o camera
Power : 120Vac/60Hz
Model : FG 840317
Mode : GSM 850 Link Mode ; Ch189 + Adaptor
+ 11b Tx_Ch01
Plane : E1

Frequency (MHz)	ERP (dBm)	Limit (dBm)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1873	-54.69	-13	-60.69	-53.7	3.39	4.55	H	Pass
2506	-47.44	-13	-55.83	-47.5	3.71	5.92	H	Pass
4815	-34.85	-13	-51.84	-38.6	2.61	8.51	H	Pass

Remark : Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



Vertical Polarization

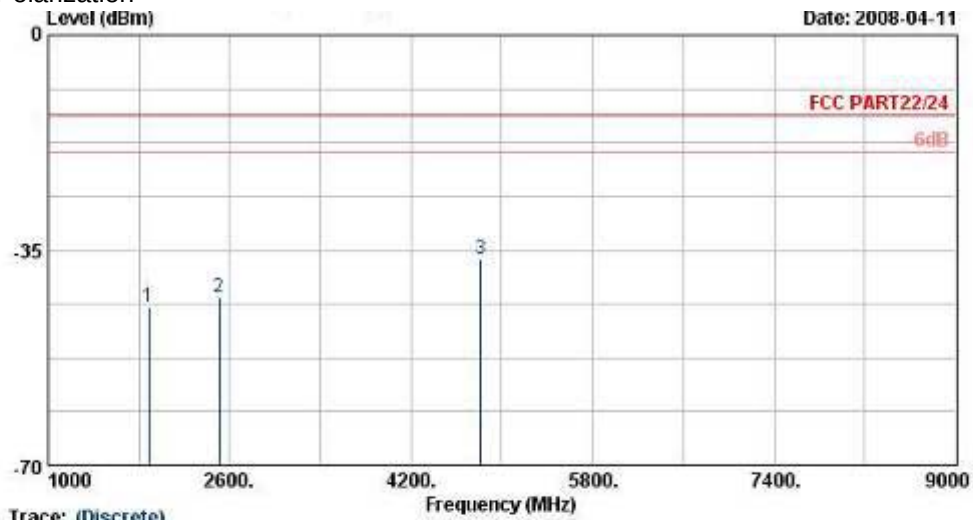


Site : 03CH07-HY
Condition : FCC PART22/24 HF-EIRP(080306) VERTICAL
EUT : MCS574 EV1 FCC submit with 1D 2D Scanner
and w/ camera w/o camera
Power : 120Vac/60Hz
Model : FG 840317
Mode : GSM 850 Link Mode ; Ch189 + Adaptor
+ 11b Tx_Ch01
Plane : E1

Frequency (MHz)	ERP (dBm)	Limit (dBm)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1882	-44.18	-13	-54.93	-42.8	3.39	4.16	V	Pass
2509	-42.74	-13	-53.97	-42.6	3.71	5.72	V	Pass
4815	-36.44	-13	-55.75	-40.8	2.61	9.12	V	Pass

Remark : Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



- **Sample B**
- Mode 7
- Horizontal Polarization

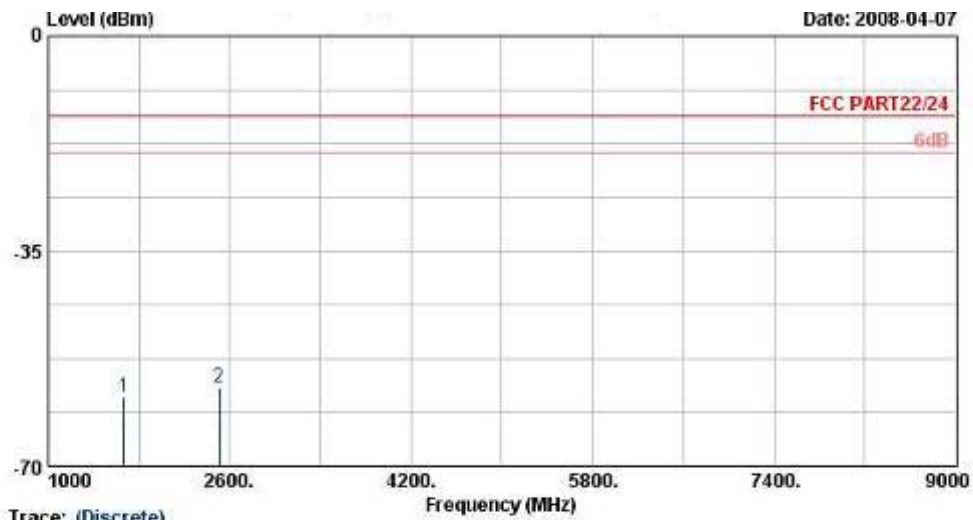


Site : 03CH07-HY
Condition : FCC PART22/24 HF-EIRP(080306) HORIZONTAL
EUT : MCS574 EV1 FCC subunit with 1D 2D Scanner
and w/ camera w/o camera
Power : 120Vac/60Hz
Model : FG 840317
Mode : GSM 850 Link Mode ; Ch189 + Adaptor
Plane : E1

Frequency (MHz)	ERP (dBm)	Limit (dBm)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1669	-58.69	-13	-60.77	-57.7	3.39	4.55	H	Pass
2509	-57.14	-13	-62.58	-57.2	3.71	5.92	H	Pass

Remark : Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



Vertical Polarization

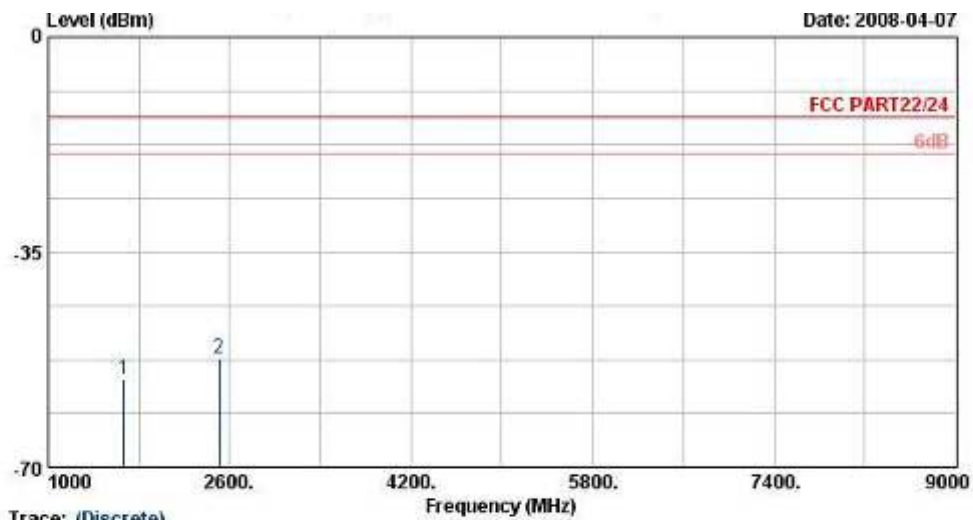


Site : 03CH07-HY
Condition : FCC PART22/24 HF-EIRP(060306) VERTICAL
EUT : MC5574 EV1 FCC submit with 1D 2D Scanner
and w/ camera w/o camera
Power : 120Vac/60Hz
Model : FG 840317
Mode : GSM 850 Link Mode ; Ch189 + Adaptor
Plane : E1

Frequency (MHz)	ERP (dBm)	Limit (dBm)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1669	-55.58	-13	-60.17	-54.2	3.39	4.16	V	Pass
2509	-52.34	-13	-60.86	-52.2	3.71	5.72	V	Pass

Remark : Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



- **Sample B**
- Mode 8
- Horizontal Polarization

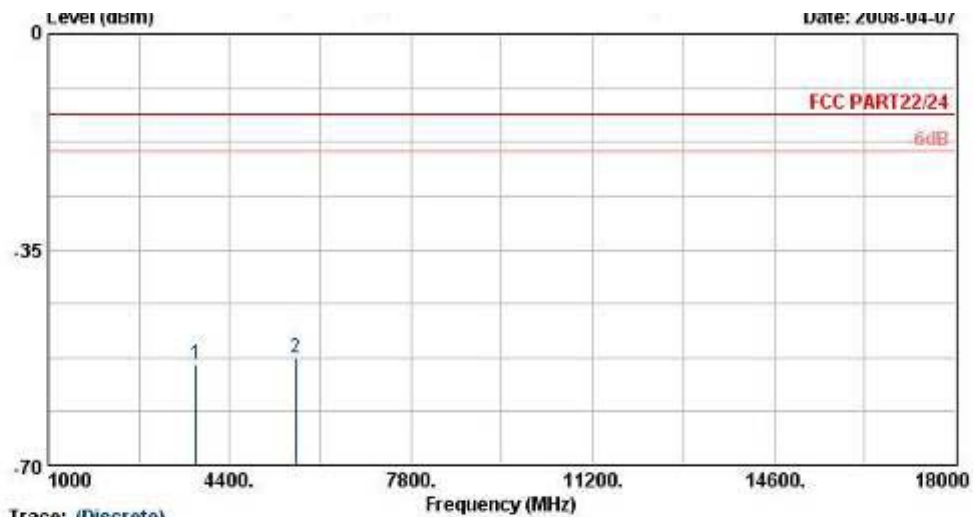


Site : 03CH07-HY
Condition : FCC PART22/24 HF-EIRP(080306) HORIZONTAL
EUT : MCS574 EV1 FCC submit with 1D 2D Scanner
and w/ camera w/o camera
Power : 120Vac/60Hz
Model : FG 840317
Mode : PCS 1900 Link Mode ; Ch661 + Adaptor
Plane : E1

Frequency (MHz)	ERP (dBm)	Limit (dBm)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-53.73	-13	-63.73	-57.1	4.03	7.40	H	Pass
5636	-52.46	-13	-65.47	-57.4	3.87	8.81	H	Pass

Remark : Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



▪ Vertical Polarization

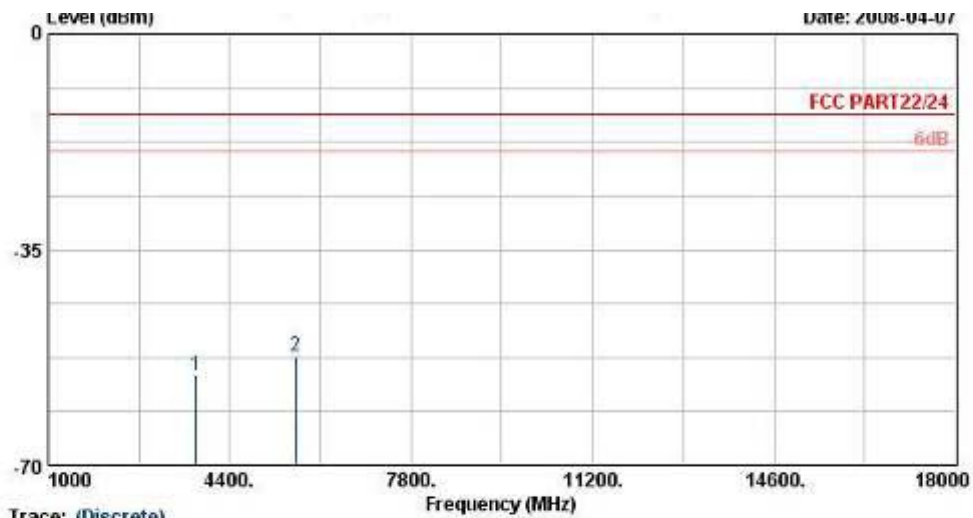


Site : 03CH07-HY
Condition : FCC PART22/24 HF-EIRP(080306) VERTICAL
EUT : MC5574 EV1 FCC submit with 1D 2D Scanner
and w/ camera w/o camera
Power : 120Vac/60Hz
Model : FG 840317
Mode : PCS 1900 Link Mode ; Ch661 + Adaptor
Plane : F1

Frequency (MHz)	ERP (dBm)	Limit (dBm)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-55.52	-13	-65.27	-59.4	4.03	7.91	V	Pass
5636	-52.20	-13	-65.46	-58.1	3.87	9.77	V	Pass

Remark : Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



- **Sample C**
- Mode 9
- Horizontal Polarization

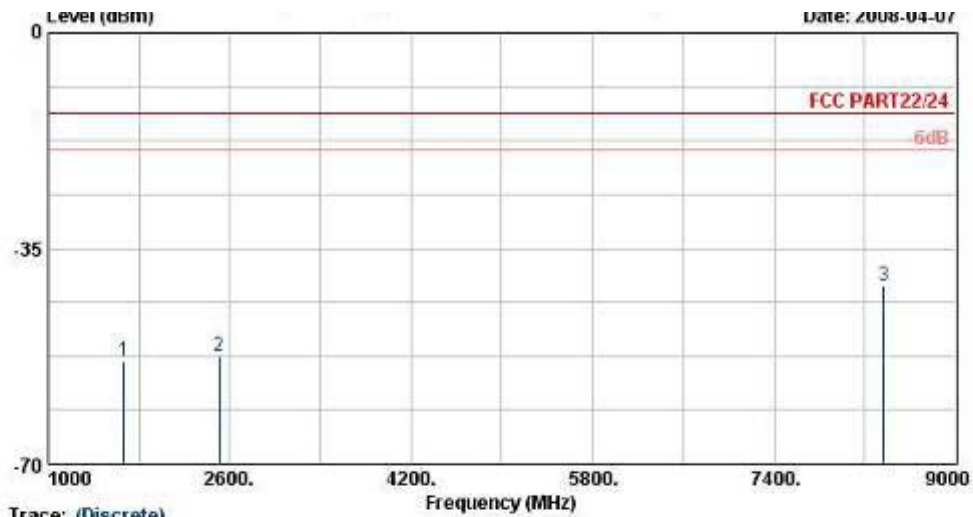


Site : 03CH07-HY
Condition : FCC PART22/24 HF-EIRP(080306) HORIZONTAL
EUT : MC5574 EV1 FCC submit with 1D 2D Scanner
and w/ camera w/o camera
Power : 120Vac/60Hz
Model : FG 840317
Mode : GSM 850 Link Mode ; Ch189 + Adaptor
Plane : E1

Frequency (MHz)	ERP (dBm)	Limit (dBm)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1669	-53.39	-13	-57.41	-52.4	3.39	4.55	H	Pass
2509	-52.64	-13	-59.79	-52.7	3.71	5.92	H	Pass
8370	-41.06	-13	-60.61	-43.8	5.59	10.48	H	Pass

Remark : Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



▪ Vertical Polarization

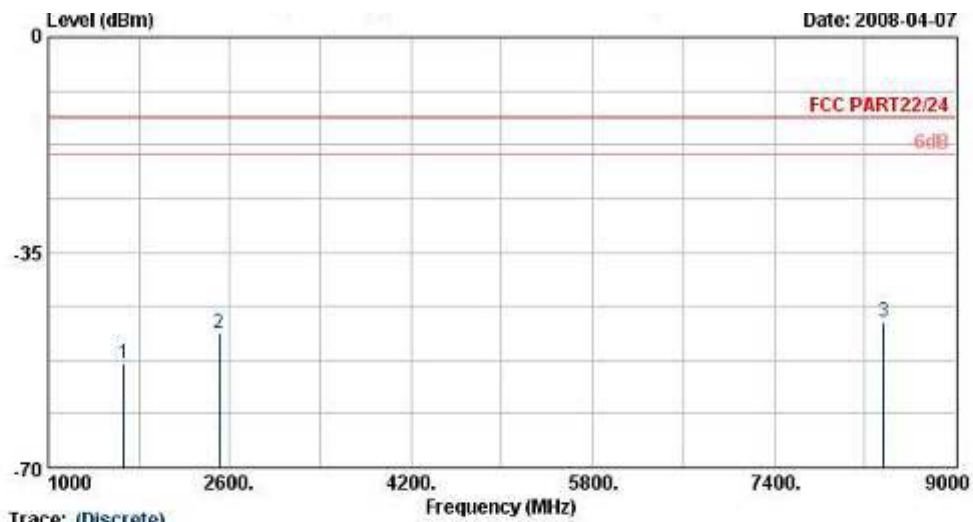


Site : 03CH07-HY
Condition : FCC PART22/24 HF-EIRP(080306) VERTICAL
EUT : MC5574 EV1 FCC submit with ID 2D Scanner
and w/ camera w/o camera
Power : 120Vac/60Hz
Model : FG 840317
Mode : GSM 850 Link Mode ; Ch189 + Adaptor
Plane : E1

Frequency	ERP	Limit	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
(MHz)	(dBm)	(dBm)	Reading	Power	loss	Gain	(H/V)	
			(dBm)	(dBm)	(dB)	(dBi)		
1669	-53.18	-13	-58.72	-51.8	3.39	4.16	V	Pass
2509	-48.14	-13	-58.22	-48.0	3.71	5.72	V	Pass
8370	-46.38	-13	-64.43	-50.0	5.59	11.36	V	Pass

Remark : Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



- **Sample C**
- Mode 10
- Horizontal Polarization

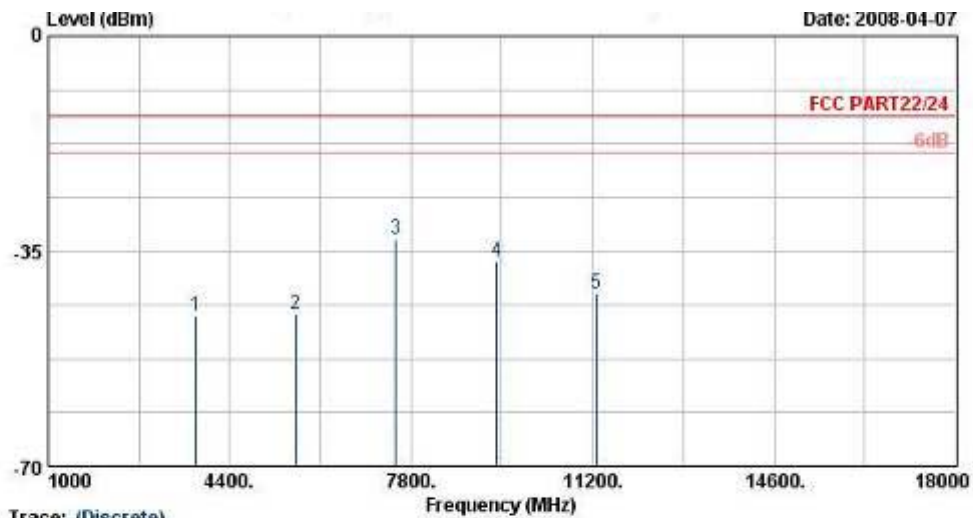


Site : 03CH07-HY
Condition : FCC PART22/24 HF-EIRP(080306) HORIZONTAL
EUT : MCS574 EV1 FCC submit with 1D 2D Scanner
and w/ camera w/o camera
Power : 120Vac/60Hz
Model : FG 840317
Mode : PCS 1900 Link Mode ; Ch661 * Adaptor
Plane : E1

Frequency (MHz)	ERP (dBm)	Limit (dBm)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-45.53	-13	-57.94	-48.9	4.03	7.40	H	Pass
5636	-45.16	-13	-61.63	-50.1	3.87	8.81	H	Pass
7520	-33.12	-13	-53.04	-37.0	5.83	9.71	H	Pass
9396	-36.60	-13	-58.92	-41.3	6.02	10.72	H	Pass
11280	-42.02	-13	-65.44	-44.3	8.48	10.76	H	Pass

Remark : Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



▪ Vertical Polarization

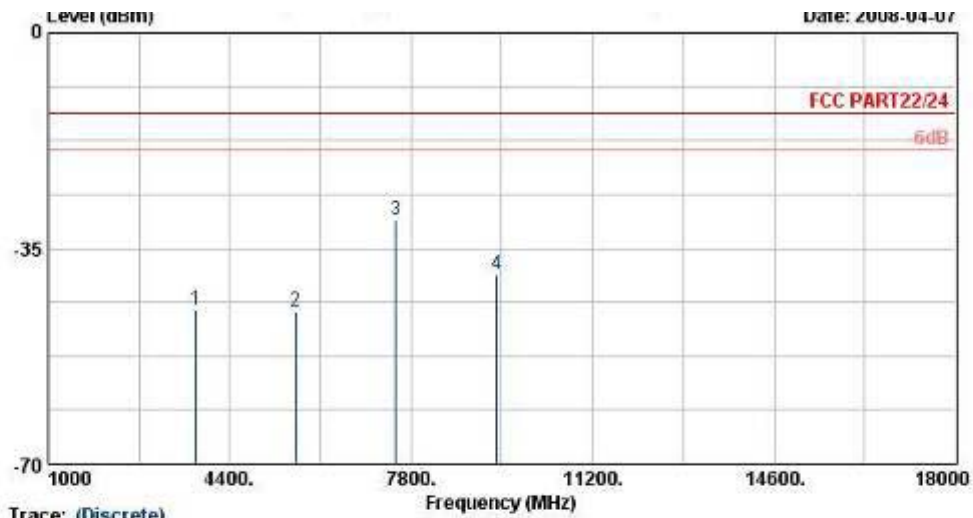


Site : 03CH07-HY
Condition : FCC PART22.24 HF-EIRP(080306) VERTICAL
EUT : MCS574 EV1 FCC submit with 1D 2D Scanner
: and w/ camera w/o camera
Power : 120Vac/60Hz
Model : FG 840317
Mode : PCS 1900 Link Mode ; Ch661 + Adaptor
Plane : E1

Frequency (MHz)	ERP (dBm)	Limit (dBm)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-45.02	-13	-59.78	-48.9	4.03	7.91	V	Pass
5636	-45.40	-13	-62.26	-51.3	3.87	9.77	V	Pass
7520	-30.42	-13	-52.59	-35.4	5.83	10.81	V	Pass
9396	-39.40	-13	-61.99	-44.9	6.02	11.52	V	Pass

Remark : Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



- **Sample D**
- Mode 11
- Horizontal Polarization

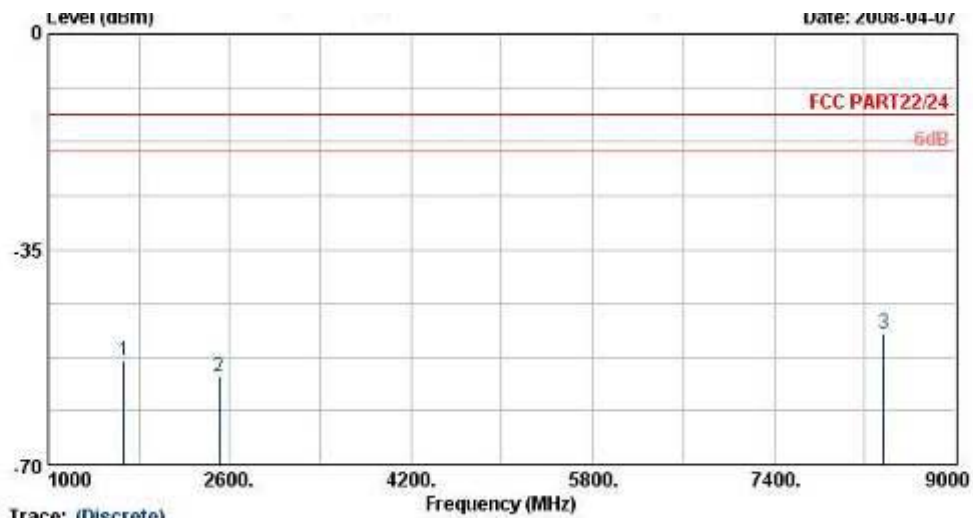


Site : 03CH07-HY
Condition : FCC PART22/24 HF-EIRP(080306) HORIZONTAL
EUT : MC5574 EV1 FCC submit with 1D 2D Scanner
and w/ camera w/o camera
Power : 120Vac/60Hz
Model : FG 840317
Mode : GSM 850 Link Mode ; Ch189 + Adaptor
Plane : E1

Frequency (MHz)	ERP (dBm)	Limit (dBm)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1669	-53.09	-13	-57.40	-52.1	3.39	4.55	H	Pass
2509	-55.74	-13	-65.77	-55.8	3.71	5.92	H	Pass
8370	-48.56	-13	-65.58	-51.3	5.59	10.48	H	Pass

Remark : Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



▪ Vertical Polarization

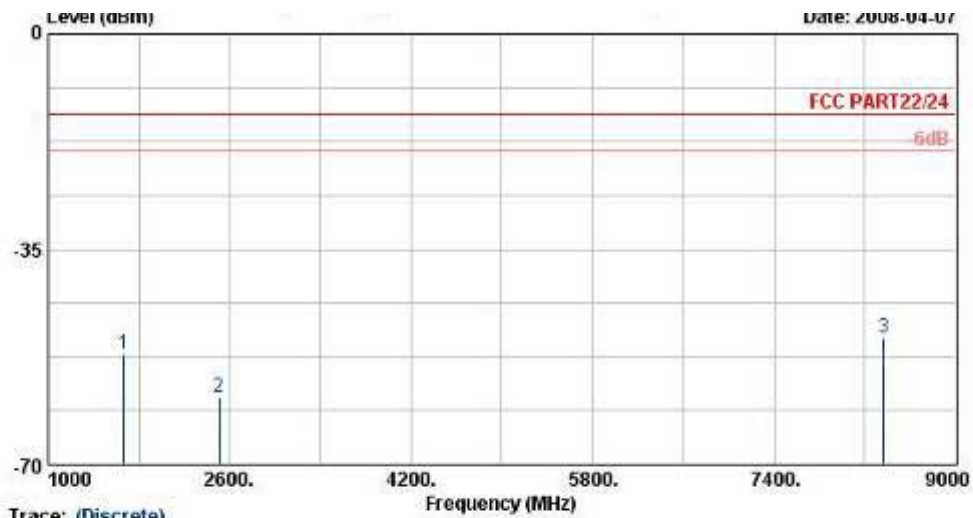


Site : 03CH07-HY
Condition : FCC PART22/24 HF-EIRP(080306) VERTICAL
EUT : MC5574 EV1 FCC subunit with 1D 2D Scanner
: and w/ camera w/o camera
Power : 120Vac/60Hz
Model : FG 840317
Mode : GSM 850 Link Mode ; Ch189 + Adaptor
Plane : E1

Frequency (MHz)	ERP (dBm)	Limit (dBm)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1669	-51.98	-13	-57.69	-50.6	3.39	4.16	V	Pass
2509	-59.04	-13	-64.82	-58.9	3.71	5.72	V	Pass
8370	-49.48	-13	-66.34	-53.1	5.59	11.36	V	Pass

Remark : Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



- **Sample D**
- Mode 12
- Horizontal Polarization

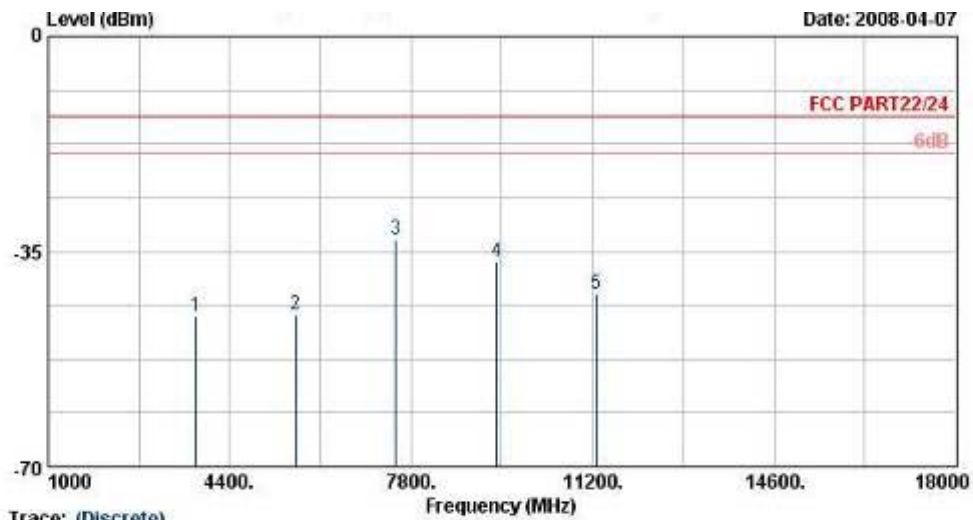


Site : 03CH07-HV
Condition : FCC PART22/24 HF-EIRP(080306) HORIZONTAL
EUT : MC5574 EV1 FCC submit with 1D 2D Scanner
and w/ camera w/o camera
Power : 120Vac/60Hz
Model : FG 840317
Mode : PCS 1900 Link Mode ; Ch661 + Adaptor
Plane : E1

Frequency (MHz)	ERP (dBm)	Limit (dBm)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-55.53	-13	-64.67	-58.9	4.03	7.40	H	Pass
7520	-37.72	-13	-57.01	-41.6	5.83	9.71	H	Pass
9396	-40.40	-13	-61.52	-45.1	6.02	10.72	H	Pass
11280	-42.22	-13	-65.19	-44.5	8.48	10.76	H	Pass

Remark : Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



▪ Vertical Polarization

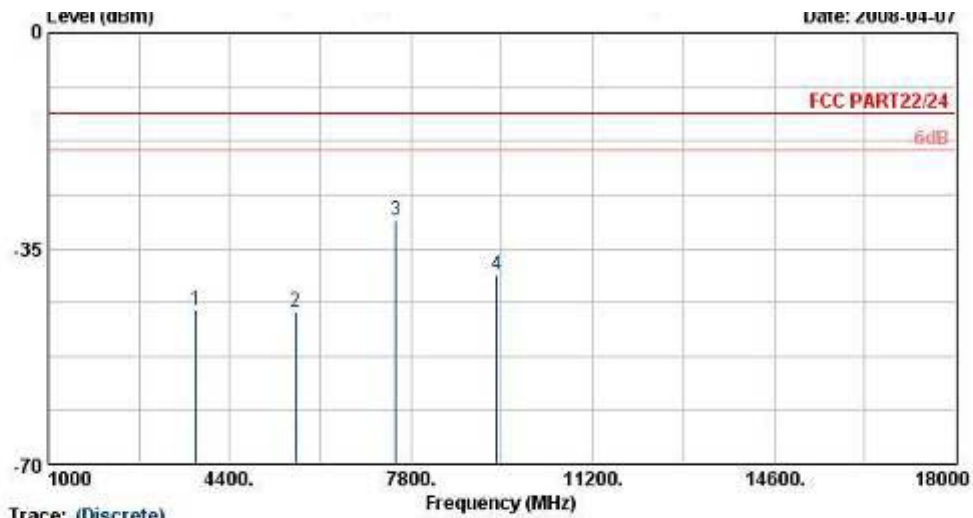

Site : 03CH07-HY
Condition : FCC PART 22.24 HF-EIRP(080306) VERTICAL
EUT : MC5574 EV1 FCC submit with 1D 2D Scanner
and w/ camera w/o camera
Power : 120Vac/60Hz
Model : FG 840317
Mode : PCS 1900 Link Mode ; Ch661 + Adaptor
Plane : E1

Frequency (MHz)	ERP (dBm)	Limit (dBm)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-51.42	-13	-63.88	-55.3	4.03	7.91	V	Pass
5636	-52.80	-13	-66.02	-58.7	3.87	9.77	V	Pass
7520	-36.12	-13	-57.49	-41.1	5.83	10.81	V	Pass
9396	-43.80	-13	-63.22	-49.3	6.02	11.52	V	Pass

Remark : Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

4.7 Frequency Stability (Temperature Variation)


4.7.1 Measurement Instrument

As described in chapter 5 of this test report.

4.7.2 Test Procedure

- a. The EUT and test equipment were set up as shown on the following section.
- b. With all power removed, the temperature was decreased to -30°C and permitted to stabilize for three hours. Power was applied and the maximum change in frequency was noted within one minute.
- c. With power OFF, the temperature was raised in 10°C steps. The sample was permitted to stabilize at each step for at least one-half hour. Power was applied and the maximum frequency change was noted within one minute.
- d. The temperature tests were performed for the worst case.
- e. Test data was recorded.

4.7.3 Test Setup Layout

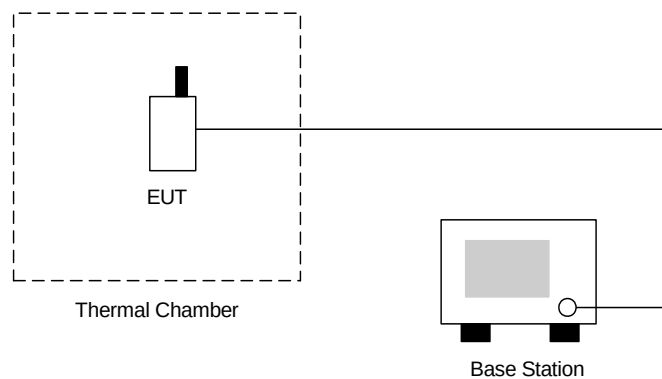

**4.7.4 Test Result**

- Test Mode : GSM850 (GSM) CH189

Temperature(°C)	Change (Hz)	Change (ppm)	Limit (ppm)	Result
-30	-17	-0.01	2.5	Passed
-20	20	0.02		
-10	19	0.02		
0	-23	-0.03		
10	-27	-0.03		
20	-10	-0.01		
30	-26	-0.03		
40	-25	-0.03		
50	-23	-0.03		

- Test Mode : GSM850 (EDGE) CH189

Temperature(°C)	Change (Hz)	Change (ppm)	Limit (ppm)	Result
-30	18	0.01	2.5	Passed
-20	21	0.02		
-10	23	0.03		
0	-16	-0.02		
10	16	0.02		
20	20	0.02		
30	28	0.03		
40	21	0.02		
50	-18	-0.02		

- Test Mode : GSM1900 (GSM) CH661

Temperature(°C)	Change (Hz)	Change (ppm)	Limit (ppm)	Result
-30	-103	-0.05	2.5	Passed
-20	88	0.05		
-10	-28	-0.01		
0	-24	-0.01		
10	-30	-0.02		
20	19	0.01		
30	17	0.01		
40	-22	-0.01		
50	-15	-0.01		



• Test Mode : GSM1900 (EDGE) CH661

Temperature(°C)	Change (Hz)	Change (ppm)	Limit (ppm)	Result
-30	139	0.07	2.5	Passed
-20	67	0.04		
-10	36	0.02		
0	19	0.01		
10	-18	-0.01		
20	-21	-0.01		
30	25	0.01		
40	-15	-0.01		
50	31	0.02		

4.8 Frequency Stability (Voltage Variation)


4.8.1 Measurement Instrument

As described in chapter 5 of this test report.

4.8.2 Test Procedure

- a. The EUT was placed in a temperature chamber at $25\pm 5^{\circ}\text{C}$ and connected as the following section.
- b. The power supply voltage to the EUT was varied from BEP to 115% of the nominal value measured at the input to the EUT.
- c. The variation in frequency was measured for the worst case.

4.8.3 Test Setup Layout

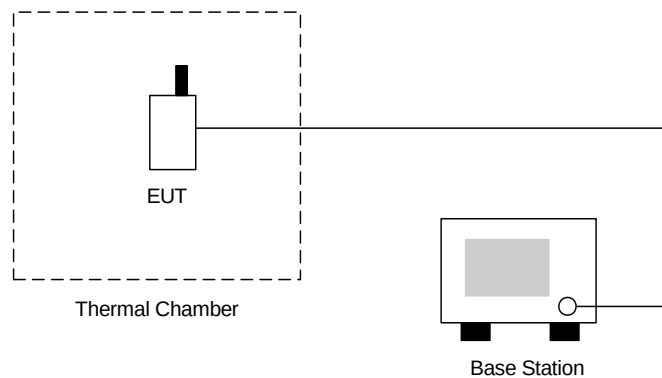

**4.8.4 Test Result**

- Test Mode : GSM850 (GSM) CH189

Voltage(Volt)	Change (Hz)	Change (ppm)	Limit (ppm)	Result
3.7	-28.0	-0.03	2.5	Passed
4.2	-33.0	-0.04		

- Test Mode : GSM850 (EDGE) CH189

Voltage(Volt)	Change (Hz)	Change (ppm)	Limit (ppm)	Result
3.7	17.0	0.02	2.5	Passed
4.2	24.0	0.03		

- Test Mode : GSM1900 (GSM) CH661

Voltage(Volt)	Change (Hz)	Change (ppm)	Limit (ppm)	Result
3.7	-60.0	-0.03	2.5	Passed
4.2	-53.0	-0.03		

- Test Mode : GSM1900 (EDGE) CH661

Voltage(Volt)	Change (Hz)	Change (ppm)	Limit (ppm)	Result
3.7	32.0	0.02	2.5	Passed
4.2	44.0	0.02		

Remark:

- Normal Voltage = 3.7V.
- Battery End Point (BEP) = 3.7V.



5. List of Measurement Equipments

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Due Date	Remark
Spectrum Analyzer	Agilent	E4408B	MY44211028	9KHz-26.5GHz	Oct. 17, 2007	Oct. 16, 2008	Radiation (03CH06-HY)
EMI Test Receiver	R&S	ESCS30	100356	9KHz-2.75GHz	Jul. 26, 2007	Jul. 25, 2008	Radiation (03CH06-HY)
Bilog Antenna	SCHAFFNER	CBL6112B	2885	30MHz -2GHz	Dec. 01, 2007	Nov. 30, 2008	Radiation (03CH06-HY)
Double Ridge Horn Antenna	Com-Power	AH118	071025	1G~18G	Jun. 04, 2007	Jun. 03, 2008	Radiation (03CH06-HY)
SHF-EHF Horn	SCHWARZBEC K	BBHA 9170	9170-251	14G - 40G	Oct. 17, 2007	Oct. 16, 2008	Radiation (03CH06-HY)
Pre Amplifier	Agilent	8449B	3008A01917	1G - 26.5G	Nov. 22, 2007	Nov. 21, 2008	Radiation (03CH06-HY)
Pre Amplifier	EMEC	PA303	PA303-SMA-	100K~3GHz	Nov. 26, 2007	Nov. 25, 2008	Radiation (03CH06-HY)
Base Station Simulator	R & S	CMU200	103937	Third-Band	Oct. 19, 2007	Oct. 18, 2008	Radiation (03CH06-HY)
Thermal Chamber	Tenyi technology	TTH-D35P	TBN-930701	N/A	Aug. 02, 2007	Aug. 01, 2008	Conduction (TH02-HY)
Spectrum	R&S	FSP40	100055	9KHz~40GHz	Jun. 25, 2007	Jun. 24, 2008	Conduction (TH02-HY)
Bluetooth Test	ANRITSU	MT8852A	6K00003939	N/A	N/A	N/A	Conduction (TH02-HY)
Power Divider	ARRA	5200-1	3871	N/A	Oct. 01, 2007	Sep. 30, 2008	Conduction (TH02-HY)
DC Power Supply	TOPWARD	3303D	740889	N/A	May 25, 2007	May 24, 2009	Conduction (TH02-HY)
Power Meter	Agilent	E4416A	GB41292344	N/A	Feb. 21, 2008	Feb. 20, 2009	Conduction (TH02-HY)
Power Sensor	Agilent	E9327A	US40441548	N/A	Feb. 21, 2008	Feb. 20, 2009	Conduction (TH02-HY)

6. Uncertainty Evaluation

Uncertainty of Radiated Emission Measurement (30MHz ~ 1000MHz)

Contribution	Uncertainty of x_i		$u(x_i)$
	dB	Probability Distribution	
Receiver reading	0.41	Normal(k=2)	0.21
Antenna factor calibration	0.83	Normal(k=2)	0.42
Cable loss calibration	0.25	Normal(k=2)	0.13
Pre Amplifier Gain calibration	0.27	Normal(k=2)	0.14
RCV/SPA specification	2.50	Rectangular	0.72
Antenna Factor Interpolation for Frequency	1.00	Rectangular	0.29
Site imperfection	1.43	Rectangular	0.83
Mismatch	+0.39/-0.41	U-shaped	0.28
Combined standard uncertainty Uc(y)	1.27		
Measuring uncertainty for a level of confidence of 95% U=2Uc(y)	2.54		

Uncertainty of Radiated Emission Measurement (1GHz ~ 40GHz)

Contribution	Uncertainty of x_i		$u(x_i)$	C_i	$C_i * u(x_i)$
	dB	Probability Distribution			
Receiver reading	±0.10	Normal(k=1)	0.10	1	0.10
Antenna factor calibration	±1.70	Normal(k=2)	0.85	1	0.85
Cable loss calibration	±0.50	Normal(k=2)	0.25	1	0.25
Receiver Correction	±2.00	Rectangular	1.15	1	1.15
Antenna Factor Directional	±1.50	Rectangular	0.87	1	0.87
Site imperfection	±2.80	Triangular	1.14	1	1.14
Mismatch Receiver VSWR $\Gamma_1 = 0.197$ Antenna VSWR $\Gamma_2 = 0.194$ Uncertainty = $20 \log(1 - \Gamma_1 * \Gamma_2 * \Gamma_3)$	+0.34/-0.35	U-shaped	0.244	1	0.244
Combined standard uncertainty Uc(y)	2.36				
Measuring uncertainty for a level of confidence of 95% U=2Uc(y)	4.72				

END OF TEST REPORT