



# SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, TaoYuan Hsien, Taiwan, R.O.C.  
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / [www.sporton.com.tw](http://www.sporton.com.tw)

## FCC RADIO TEST REPORT

Applicant's company	<b>SYMBOL Technologies, INC.</b>
Applicant Address	One Symbol Plaza Holtsville, New York, 11742-1300 U.S.A
FCC ID	<b>H9PWT4090</b>
Manufacturer's company	<b>Universal Scientific Industrial CO., LTD.</b>
Manufacturer Address	141, Lane 351, Taiping Road, Sec. 1, Tsao Tuen, Nan-Tou, Taiwan

Product Name	Mobile computer
Brand Name	Symbol
Model Name	WT4090
Test Rule Part(s)	47 CFR FCC Part 15 Subpart E § 15.407
Test Freq. Band	5150 ~ 5250MHz
Received Date	Jul. 24, 2006
Final Test Date	Sep. 08, 2006
Submission Type	Original Equipment



### Statement

**Test result included is only for the 802.11a (5150 ~ 5250MHz) of the product.**

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.4-2003** and **47 CFR FCC Part 15 Subpart E**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.

**NVLAP**<sup>®</sup>

Lab Code: 200079-0

## Table of Contents

<b>1. CERTIFICATE OF COMPLIANCE .....</b>	<b>1</b>
<b>2. SUMMARY OF THE TEST RESULT .....</b>	<b>2</b>
<b>3. GENERAL INFORMATION .....</b>	<b>3</b>
3.1. Product Details.....	3
3.2. Accessories.....	3
3.3. Table for Filed Antenna.....	3
3.4. Table for Carrier Frequencies .....	3
3.5. Table for Test Modes .....	4
3.6. Table for Testing Locations.....	4
3.7. Table for Supporting Units .....	5
3.8. Table for Parameters of Test Software Setting .....	5
3.9. Test Configurations .....	6
<b>4. TEST RESULT .....</b>	<b>11</b>
4.1. AC Power Line Conducted Emissions Measurement.....	11
4.2. 99% Occupied Bandwidth Measurement .....	15
4.3. Maximum Conducted Output Power Measurement.....	18
4.4. Power Spectral Density Measurement .....	21
4.5. Peak Excursion Measurement.....	24
4.6. Radiated Emissions Measurement .....	27
4.7. Band Edge Emissions Measurement .....	47
4.8. Frequency Stability Measurement .....	50
4.9. Antenna Requirements .....	52
<b>5. LIST OF MEASURING EQUIPMENTS .....</b>	<b>53</b>
<b>6. TEST LOCATION.....</b>	<b>54</b>
<b>7. NVLAP CERTIFICATE OF ACCREDITATION .....</b>	<b>55</b>
APPENDIX A. PHOTOGRAPHS OF EUT.....	A1 ~ A48
APPENDIX B. TEST PHOTOS.....	B1 ~ B10
APPENDIX C. MAXIMUM PERMISSIBLE EXPOSURE.....	C1 ~ C3



## History of This Test Report

Original Issue Date: Sep. 21, 2006

Report No.: FR691116-AG

No additional attachment.

Additional attachment were issued as following record:



## 1. CERTIFICATE OF COMPLIANCE

Product Name : Mobile computer  
Brand Name : Symbol  
Model Name : WT4090  
Applicant : SYMBOL Technologies, INC.  
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart E § 15.407

Sportun International as requested by the applicant to evaluate the EMC performance of the product sample received on Jul. 24, 2006 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

Jean Huang Sep. 22, 2006  
Prepared By:  
Jean Huang / Specialist

Carl Lee 22.9.06  
Tested By:  
Carl Lee / Engineer

Roger Sheng Sep. 22, 2006  
Reviewed By:  
Roger Sheng / Manager

## 2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart E				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	11.50 dB
4.2	15.407(a)	26dB Spectrum Bandwidth	Complies	-
4.3	15.407(a)	Maximum Conducted Output Power	Complies	3.84 dB
4.4	15.407(a)	Power Spectral Density	Complies	0.78 dB
4.5	15.407(a)	Peak Excursion	Complies	8.28 dB
4.6	15.407(b)	Radiated Emissions	Complies	5.66 dB
4.7	15.407(b)	Band Edge Emissions	Complies	5.16 dB
4.8	15.407(g)	Frequency Stability	Complies	-
4.9	15.203	Antenna Requirements	Complies	-

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	±2.26dB	Confidence levels of 95%
Maximum Conducted Output Power	±0.506dB	Confidence levels of 95%
Power Spectral Density	±0.506dB	Confidence levels of 95%
Peak Excursion	±0.506dB	Confidence levels of 95%
26dB Spectrum Bandwidth / Frequency Stability	±1.64×10 <sup>-6</sup>	Confidence levels of 95%
Radiated Emissions (9kHz~30MHz)	±0.754dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±1.89dB	Confidence levels of 95%
Radiated / Band Edge Emissions (1GHz~18GHz)	±1.89dB	Confidence levels of 95%
Radiated Emissions (18GHz~40GHz)	±1.86dB	Confidence levels of 95%
Temperature	±0.7	Confidence levels of 95%
Humidity	±3.2%	Confidence levels of 95%
DC / AC Power Source	±0.04%	Confidence levels of 95%

### 3. GENERAL INFORMATION

#### 3.1. Product Details

EUT is a Mobile computer with IEEE 802.11 a/b/g, Bluetooth radio functions. Only the radio detail of WLAN is shown in the table below. For more detailed features description, please refer to the manufacturer's specifications or user's manual.

Items	Description
Power Type	12V DC from adapter; 3.7V DC from battery
Modulation	OFDM for IEEE 802.11a
Data Modulation	OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	OFDM (6/9/12/18/24/36/48/54)
Frequency Band	5150 ~ 5250MHz
Channel Number	8
Channel Band Width (99%)	Band 1: 16.64 MHz
Conducted Output Power	Band 1: 13.16 dBm

#### 3.2. Accessories

Power	Brand	Model	Rating
Adapter	HIPRO	HP-O2040D43	INPUT: 100~240V AC OUTPUT: 12V DC
Battery	Symbol	-	3.7V DC
<b>Others</b>			
Cradle, scanner RS-409, scanner RS-309, Headset (MIC + Earphone)			

#### 3.3. Table for Filed Antenna

Ant.	Antenna Type	Brand	Model	Connector	Gain (dBi)	Remark
1	PIFA Antenna	Laird	NG Wearable	UFL	4.42	WLAN

#### 3.4. Table for Carrier Frequencies

Frequency Band	Channel No.	Frequency
5150~5250 MHz (USA/Canada) Band 1	36	5180 MHz
	40	5200 MHz
	44	5220 MHz
	48	5240 MHz

### 3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel
AC Power Line Conducted Emissions	Charging+USB Link+WLAN Link+Audio+Video Mode	11 Mbps	-
26dB Spectrum Bandwidth 99% Occupied Bandwidth Measurement	11a/BPSK	6 Mbps	36/40/48
Max. Conducted Output Power			
Power Spectral Density			
Peak Excursion			
Radiated Emissions Below 1GHz	11a/BPSK	6 Mbps	-
Radiated Emissions Above 1GHz	11a/BPSK	6 Mbps	36/40/48
Band Edge Emissions	11a/BPSK	6 Mbps	36/48
Frequency Stability	Un-modulation	-	48

Note:

There are five test modes shown in the Radiated Emissions below 1GHz:

Mode 1: Scanner RS-309 with long cable

Mode 2: Scanner RS-309 with short cable

Mode 3: Scanner RS-409 with long cable

Mode 4: Scanner RS-409 with short cable

Mode 5: Charging Mode

### 3.6. Table for Testing Locations

Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No
03CH03-HY	SAC	Hwa Ya	101377	IC 4088	-
CO04-HY	Conduction	Hwa Ya	101377	IC 4088	-
TH01-HY	OVEN Room	Hwa Ya	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC); Fully Anechoic Chamber (FAC).

Please refer section 6 for Test Site Address.

### 3.7. Table for Supporting Units

Support Unit	Brand	Model	FCC ID
Bar code	-	-	Provide by Customer
Headset (MIC + Earphone)	-	-	
AP (Remote workstation)	VSI	AP-B-AG-01	
PDA (Remote workstation)	SYMBOL	MC3090BT	
Scanner RS-309 with long cable	-	-	
Scanner RS-309 with short cable	-	-	
Scanner RS-409 with long cable	-	-	
Scanner RS-409 with short cable		-	
Notebook	DELL	D400	DoC
Mouse	Microsoft	1004	DoC
Modem	ACEEX	DM-1414	IFAXDM1414

### 3.8. Table for Parameters of Test Software Setting

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

#### Power Parameters of IEEE 802.11a

Test Software Version	CECTRX		
Frequency	5180 MHz	5200 MHz	5240 MHz
IEEE 802.11a	15.75	16.00	16.25


### 3.9. Test Configurations

#### 3.9.1. Radiation Emissions Test Configuration

**9kHz ~1GHz**


**Scanner RS-309 with long cable**

**Scanner RS-309 with short cable**

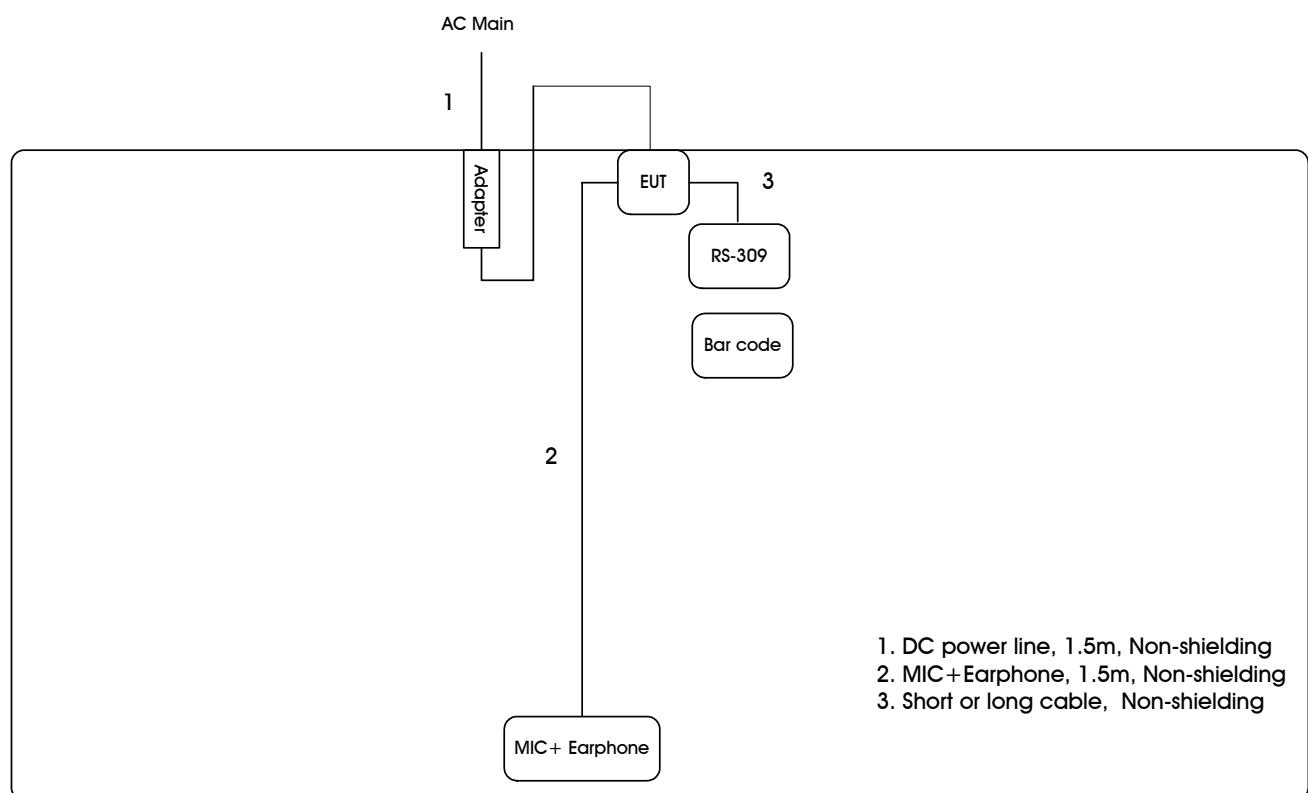


**Scanner RS-409 with long cable**

**Scanner RS-409 with short cable**

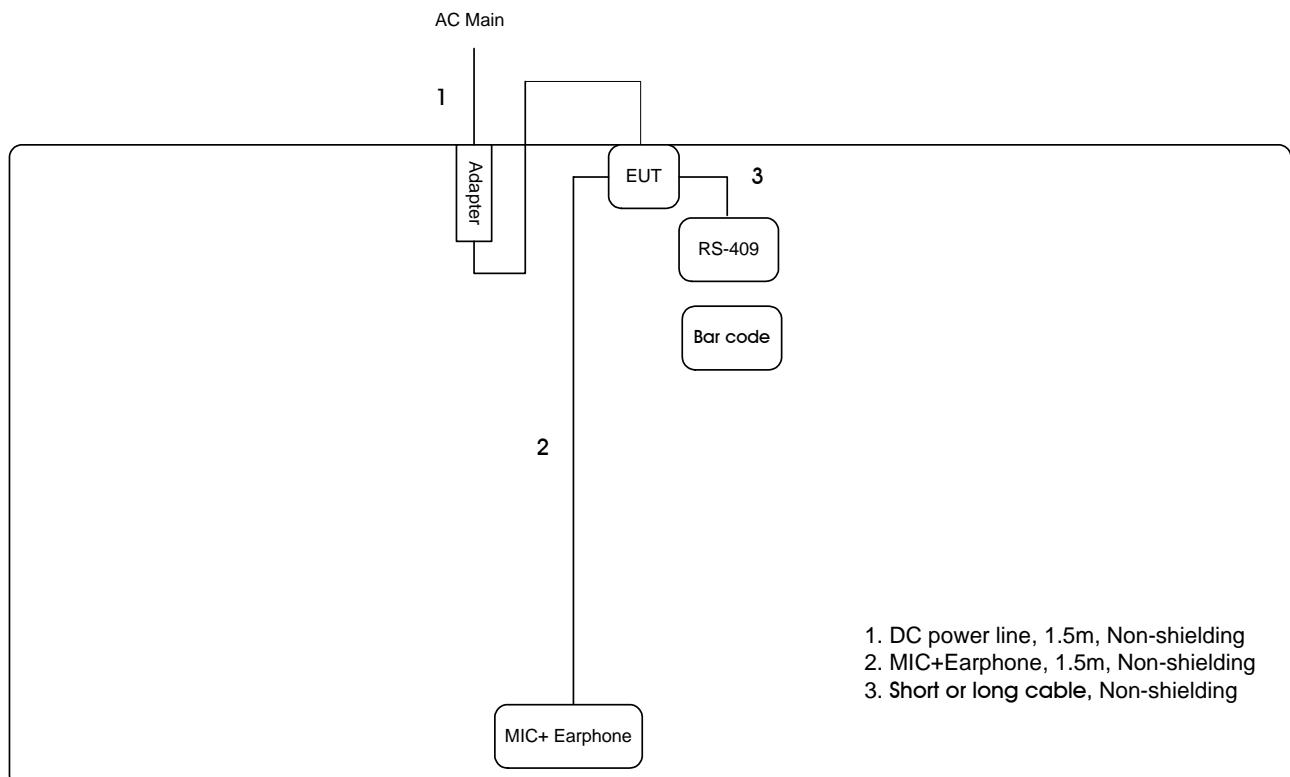


### Charging Mode

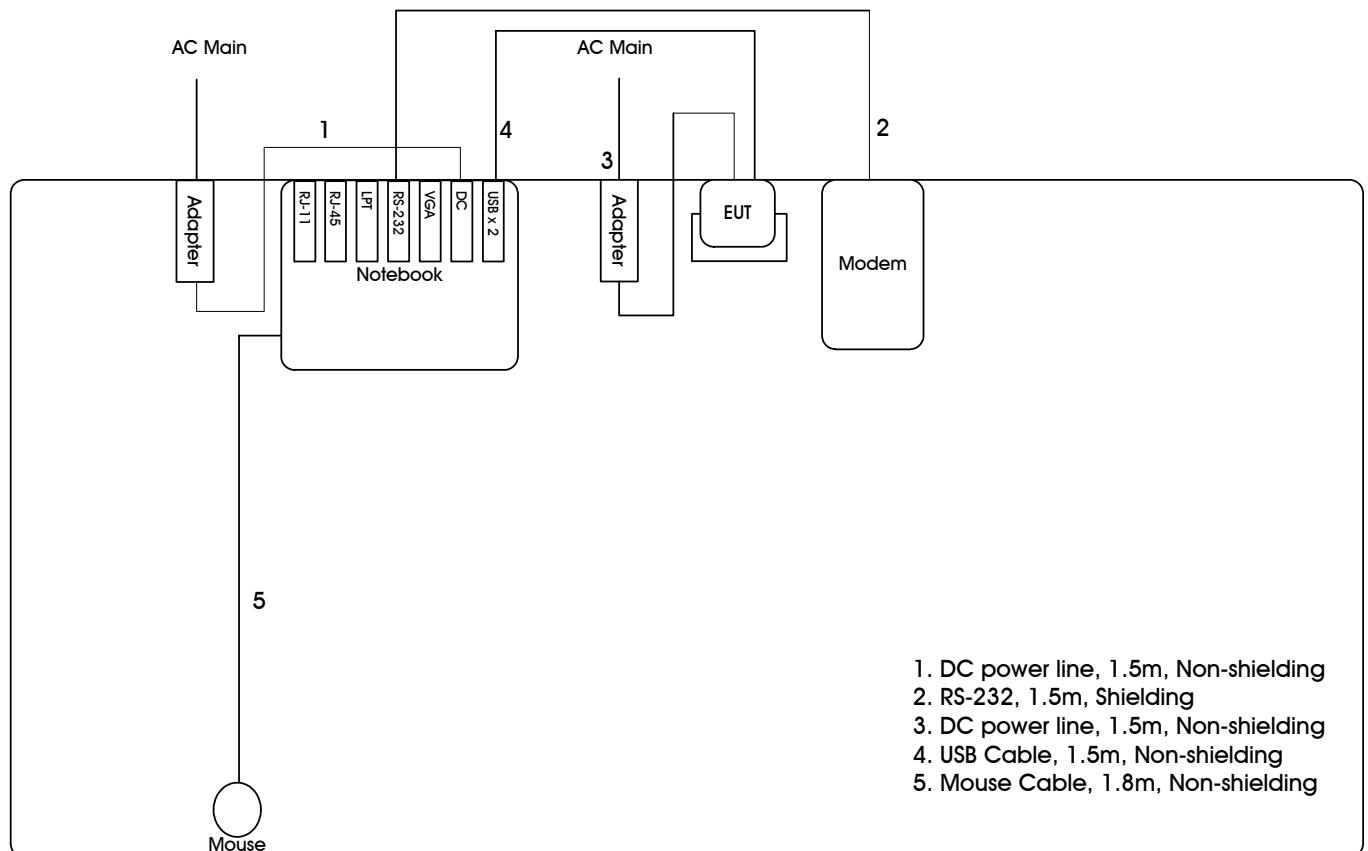




**Above 1GHz**



### 3.9.2. AC Power Line Conduction Emissions Test Configuration

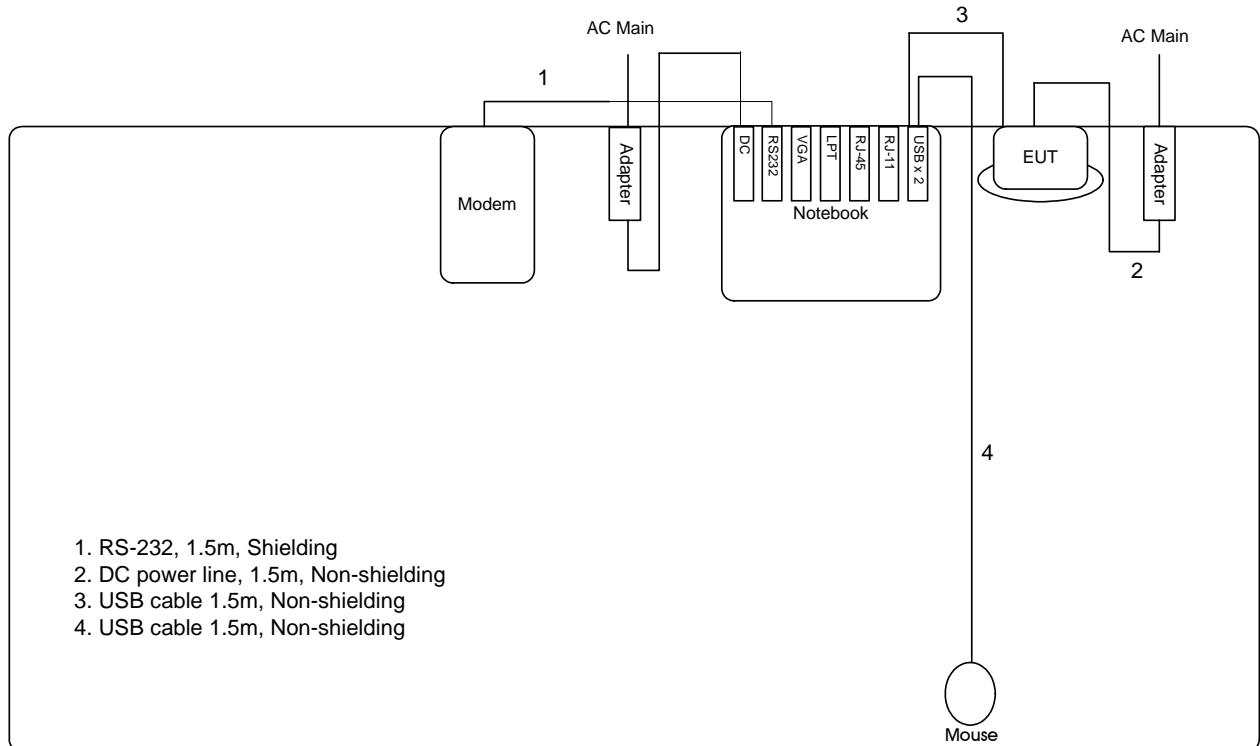

## 4. TEST RESULT

### 4.1. AC Power Line Conducted Emissions Measurement

#### 4.1.1. Limit

For this product that is designed to connect to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

#### 4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

#### 4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.4. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 KHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

#### 4.1.4. Test Setup Layout

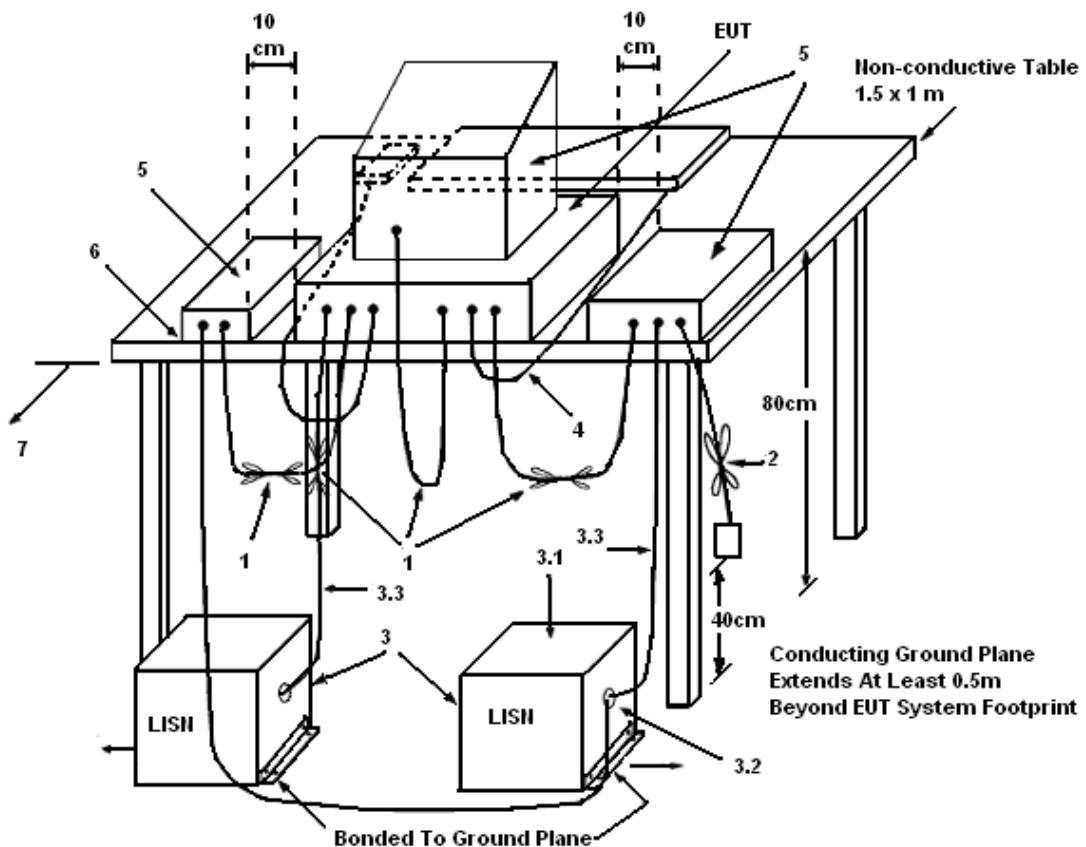

##### LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 . LISN can be placed on top of, or immediately beneath, reference ground plane.
  - (3.1) All other equipment powered from additional LISN(s).
  - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
  - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

#### 4.1.5. Test Deviation


There is no deviation with the original standard.

#### 4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


#### 4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	20	Humidity	70%
Test Engineer	Carl Lee	Phase	Line
Configuration	Charging+USB Link+WLAN Link+Audio+Video Mode		

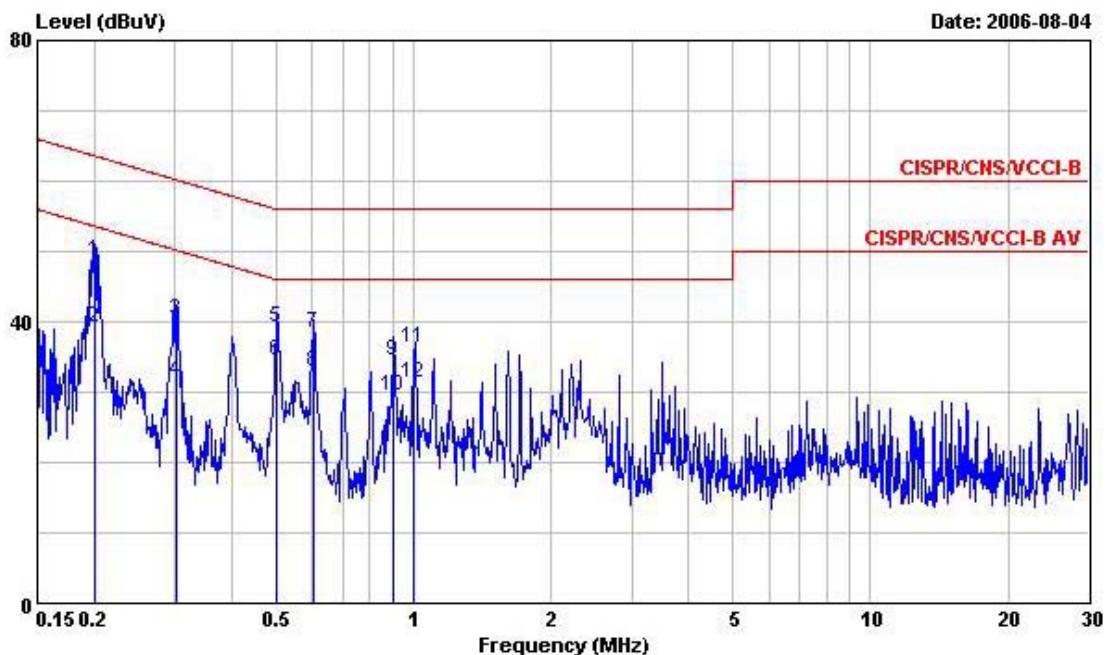

Freq	Level	Over	Limit	Read	LISN	Cable	
		Limit	Line	Level	Factor	Loss	
MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.1996860	48.61	-15.01	63.62	48.61	0.00	0.00 QP
2	0.1996860	39.10	-14.52	53.62	39.10	0.00	0.00 Average
3	0.3012930	40.27	-19.94	60.21	40.27	0.00	0.00 QP
4	0.3012930	31.63	-18.58	50.21	31.63	0.00	0.00 Average
5	0.5020260	39.13	-16.87	56.00	39.13	0.00	0.00 QP
6	0.5020260	34.50	-11.50	46.00	34.50	0.00	0.00 Average
7	0.6011200	38.30	-17.70	56.00	38.30	0.00	0.00 QP
8	0.6011200	32.90	-13.10	46.00	32.90	0.00	0.00 Average
9	0.9039420	34.55	-21.45	56.00	34.55	0.00	0.00 QP
10	0.9039420	29.53	-16.47	46.00	29.53	0.00	0.00 Average
11	1.004	36.21	-19.79	56.00	36.21	0.00	0.00 QP
12	1.004	31.23	-14.77	46.00	31.23	0.00	0.00 Average

Temperature	20	Humidity	70%
Test Engineer	Carl Lee	Phase	Neutral
Configuration	Charging+USB Link+WLAN Link+Audio+Video Mode		

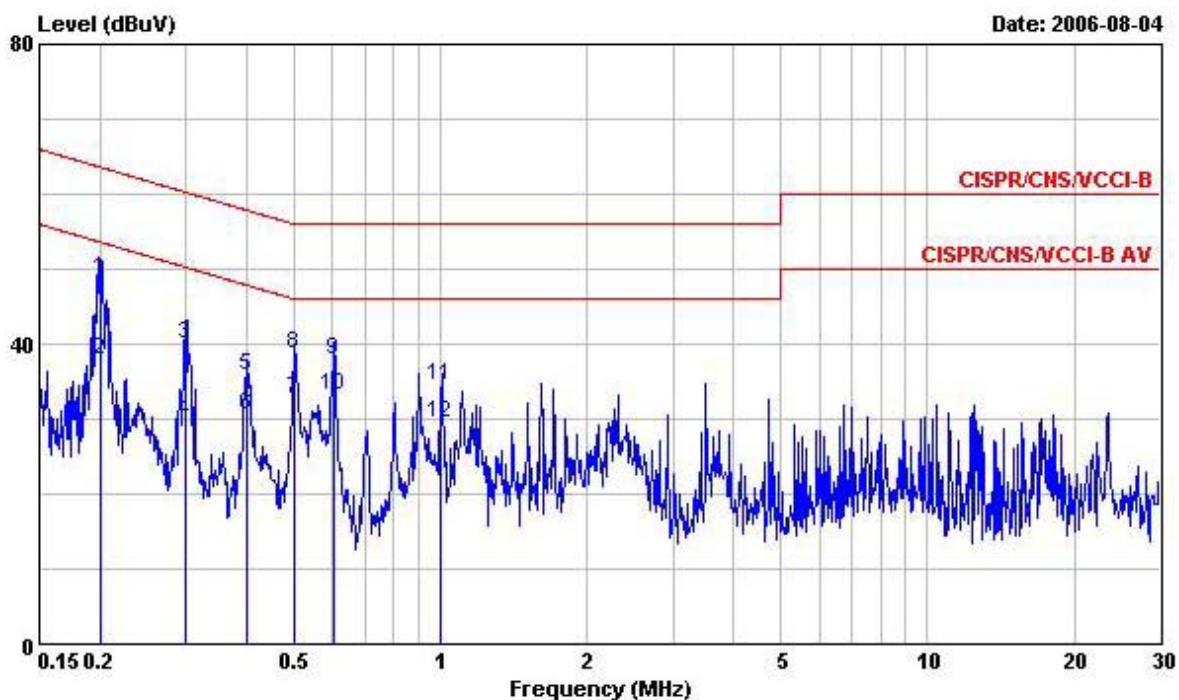

Freq	Level	Over Limit	Limit Line	Read	LISN	Cable	Remark
				Level			
MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1 0.2004360	48.63	-14.96	63.59	48.63	0.00	0.00	QP
2 0.2004360	37.82	-15.77	53.59	37.82	0.00	0.00	Average
3 0.3002800	39.93	-20.31	60.24	39.93	0.00	0.00	QP
4 0.3002800	29.76	-20.48	50.24	29.76	0.00	0.00	Average
5 0.4018680	35.70	-22.11	57.81	35.70	0.00	0.00	QP
6 0.4018680	30.50	-17.31	47.81	30.50	0.00	0.00	Average
7 0.5020260	32.64	-13.36	46.00	32.64	0.00	0.00	Average
8 0.5020260	38.67	-17.33	56.00	38.67	0.00	0.00	QP
9 0.6044380	37.80	-18.20	56.00	37.80	0.00	0.00	QP
10 0.6044380	33.15	-12.85	46.00	33.15	0.00	0.00	Average
11 1.004	34.50	-21.50	56.00	34.50	0.00	0.00	QP
12 1.004	29.54	-16.46	46.00	29.54	0.00	0.00	Average

Note:

Level = Read Level + LISN Factor + Cable Loss.

## 4.2. 99% Occupied Bandwidth Measurement

### 4.2.1. Limit

No restriction limits. But resolution bandwidth within band edge measurement is 1% of the 99% occupied bandwidth.

### 4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the Spectrum Analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 26dB Bandwidth
RB	300 kHz
VB	1000 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

### 4.2.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
2. The resolution bandwidth of 300 kHz and the video bandwidth of 1000 kHz were used.
3. Measured the spectrum width with power higher than 26dB below carrier.

### 4.2.4. Test Setup Layout

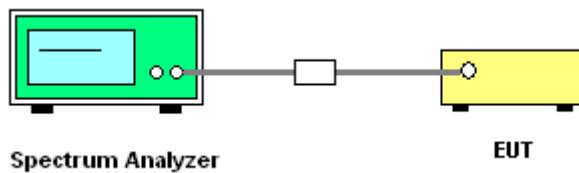

### 4.2.5. Test Deviation

There is no deviation with the original standard.

### 4.2.6. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

## 4.2.7. Test Result of 99% Occupied Bandwidth

Temperature	27	Humidity	52%
Test Engineer	Sam Lee	Configurations	802.11a


Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
36	5180 MHz	22.08	16.64
40	5200 MHz	22.08	16.64
48	5240 MHz	21.28	16.64

26 dB Bandwidth Plot on Configuration IEEE 802.11a / 5180 MHz

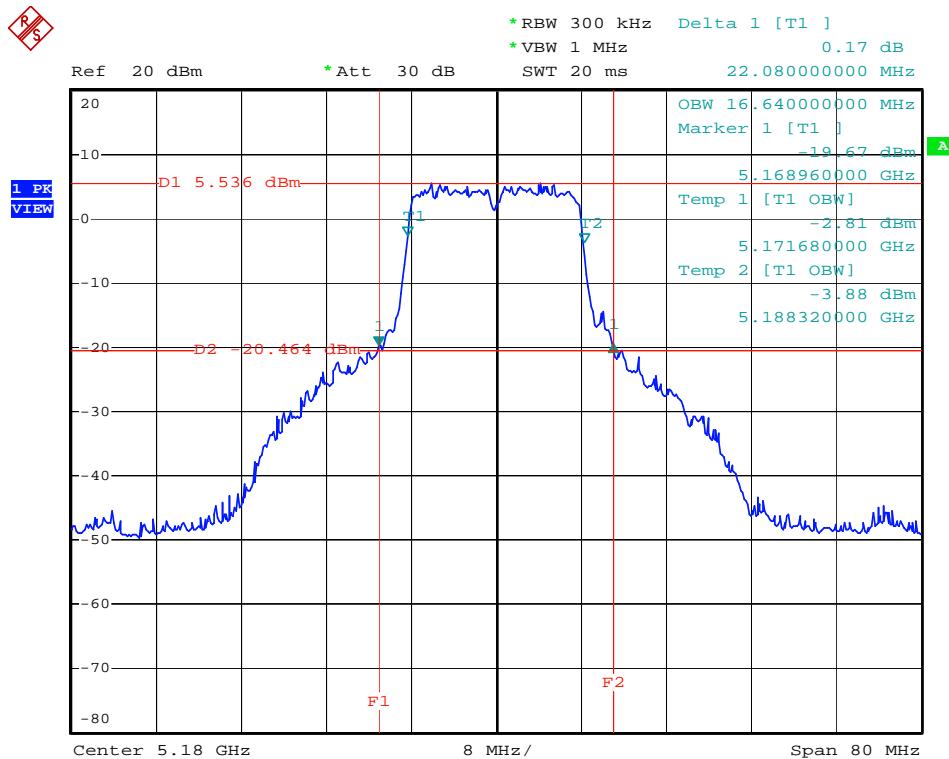


Date: 14.SEP.2006 15:36:09

### 26 dB Bandwidth Plot on Configuration IEEE 802.11a / 5200 MHz

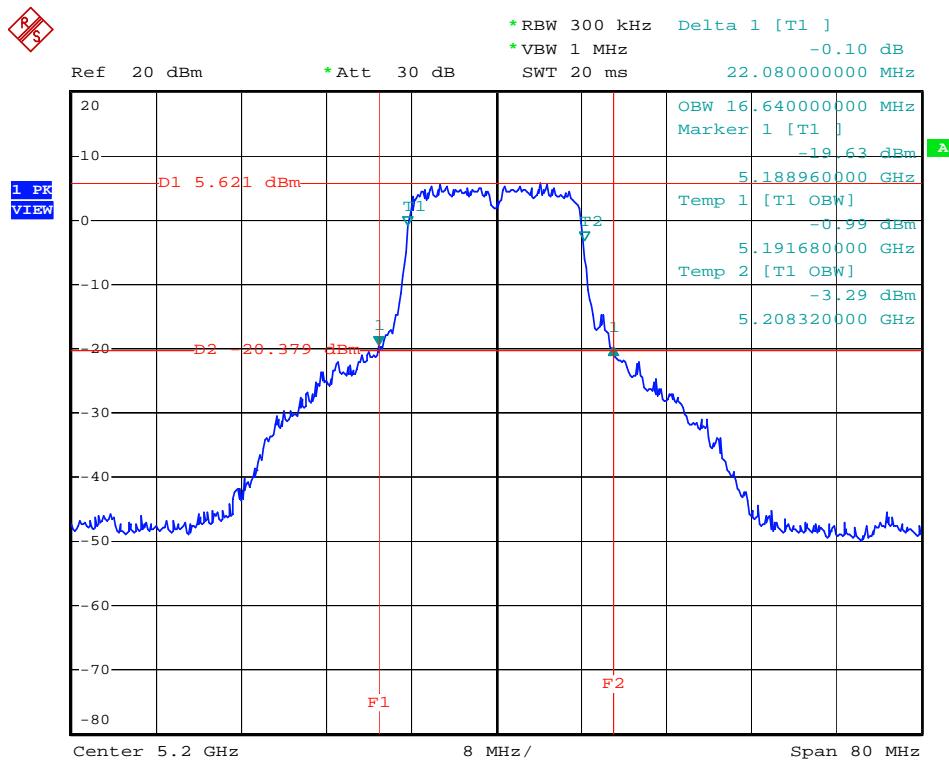

Date: 14.SEP.2006 15:37:05

### 26 dB Bandwidth Plot on Configuration IEEE 802.11a / 5240 MHz

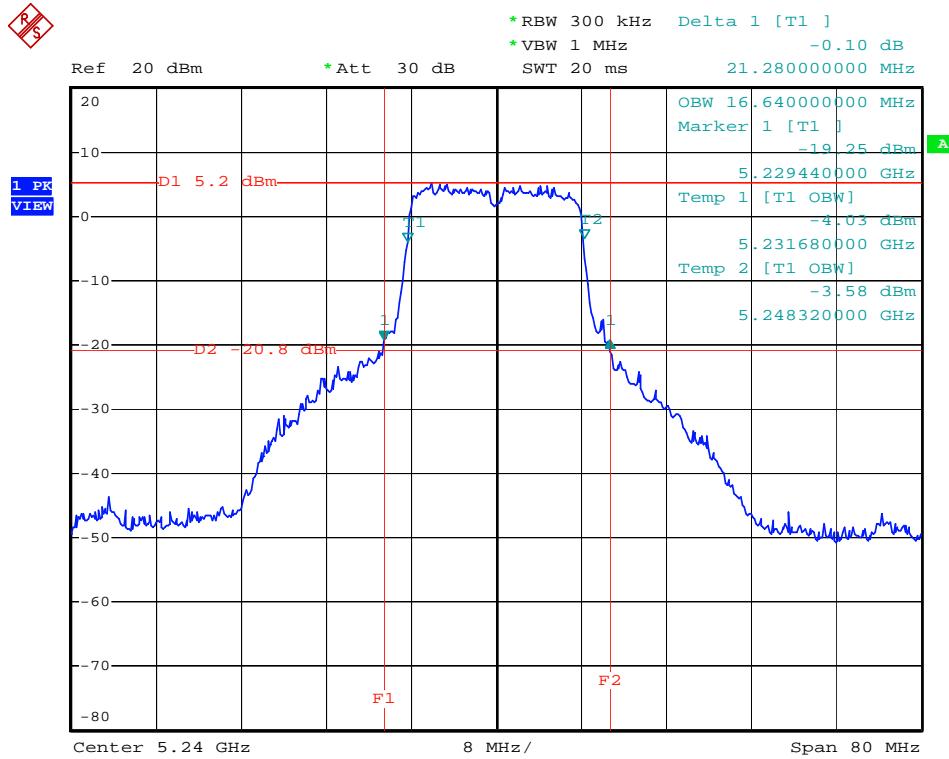

Date: 14.SEP.2006 15:44:17

#### 4.3. Maximum Conducted Output Power Measurement

##### 4.3.1. Limit

For the band 5.15~5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW (17dBm) or  $4 \text{ dBm} + 10\log B$ , where B is the 26 dB emissions bandwidth in MHz. If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power and power density from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW (24dBm) or  $11 \text{ dBm} + 10\log B$ . If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power and power density from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.825 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 1 W (30dBm) or  $17 \text{ dBm} + 10\log B$ . If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power and power density from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain up to 23 dBi without any corresponding reduction in the transmitter peak output power and peak power spectral density. For fixed, point-to-point U-NII transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in peak transmitter power and peak power spectral density for each 1 dB of antenna gain in excess of 23 dBi would be required.

##### 4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RB	1000 kHz
VB	3000 kHz
Detector	Sample
Trace	Average
Sweep Time	20ms Trace Average 100times

##### 4.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. Test was performed in accordance with method #1 of FCC Public Notice DA 02-2138.

#### 4.3.4. Test Setup Layout

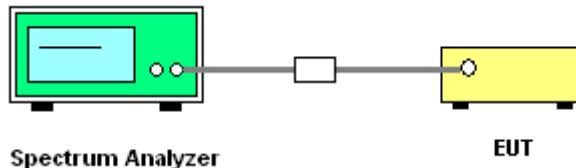

#### 4.3.5. Test Deviation

There is no deviation with the original standard.

#### 4.3.6. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

#### 4.3.7. Test Result of Maximum Conducted Output Power

Temperature	27	Humidity	52%
Test Engineer	Sam Lee	Configurations	802.11a


Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
36	5180 MHz	13.16	17.00	Complies
40	5200 MHz	13.08	17.00	Complies
48	5240 MHz	12.46	17.00	Complies

Channel Output Power Plot on Configuration IEEE 802.11a / 5180 MHz

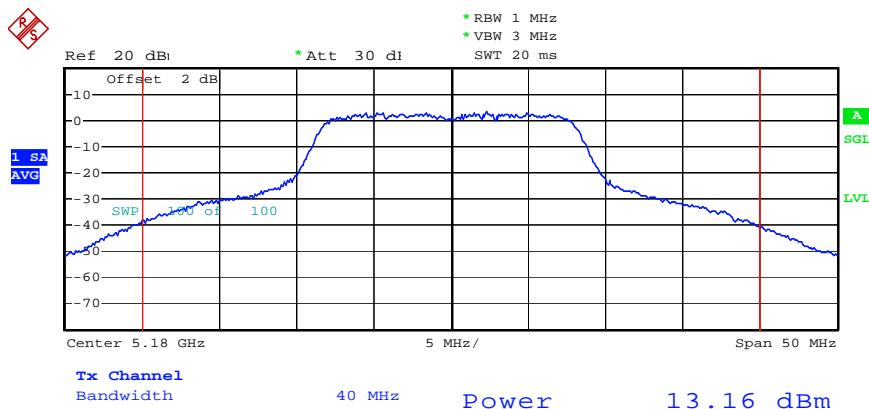


Date: 14.SEP.2006 15:36:28

### Channel Output Power Plot on Configuration IEEE 802.11a / 5200 MHz

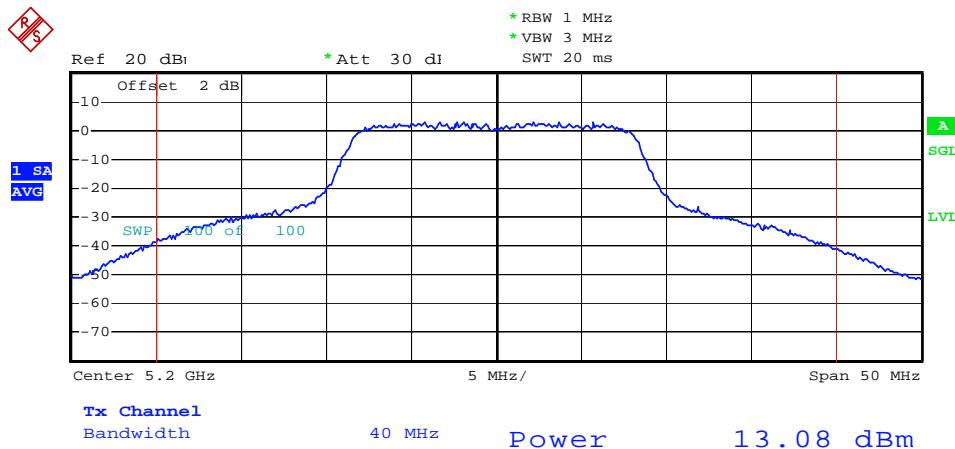

Date: 14.SEP.2006 15:37:24

### Channel Output Power Plot on Configuration IEEE 802.11a / 5240 MHz

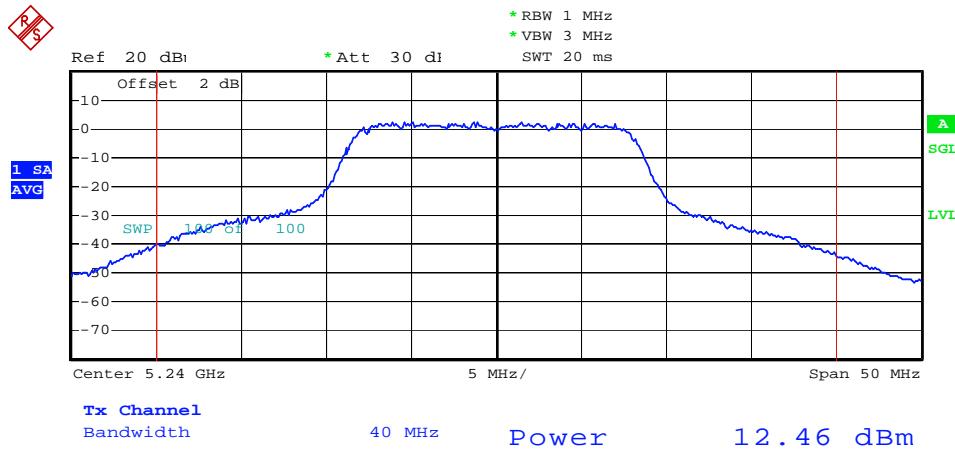

Date: 14.SEP.2006 15:44:35

## 4.4. Power Spectral Density Measurement

### 4.4.1. Limit

The power spectral density is defined as the highest level of power in dBm per MHz generated by the transmitter within the power envelope. The following table is power spectral density limits and decrease power density limit rule refer to section 4.3.1.

Frequency Range	Power Spectral Density limit (dBm/MHz)
5.15~5.25 GHz	4
5.25-5.35 GHz	11

### 4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of Spectrum Analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RB	1000 kHz
VB	3000 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

### 4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. Set RBW of spectrum analyzer to 1000kHz and VBW to 3000kHz. Set Detector to Peak, Trace to Max Hold. Mark the frequency with maximum peak power as the center of the display of the spectrum.

### 4.4.4. Test Setup Layout

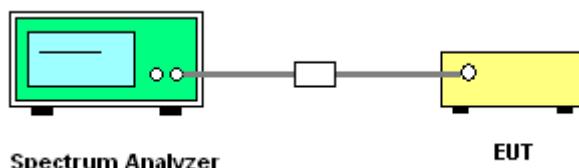

### 4.4.5. Test Deviation

There is no deviation with the original standard.

#### 4.4.6. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

#### 4.4.7. Test Result of Power Spectral Density

Temperature	27	Humidity	52%
Test Engineer	Sam Lee	Configurations	802.11a


Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
5180 MHz	3.22	4.00	Complies
5200 MHz	3.08	4.00	Complies
5240 MHz	3.21	4.00	Complies

Power Density Plot on Configuration IEEE 802.11a / 5180 MHz

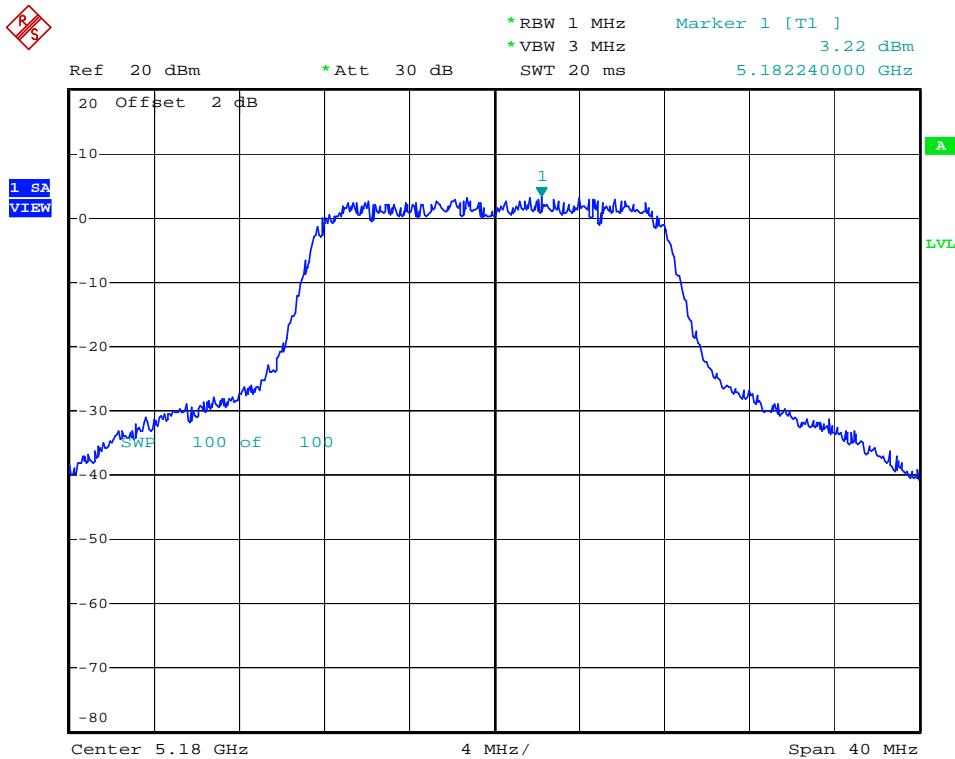


Date: 14.SEP.2006 15:36:16

## Power Density Plot on Configuration IEEE 802.11a / 5200 MHz

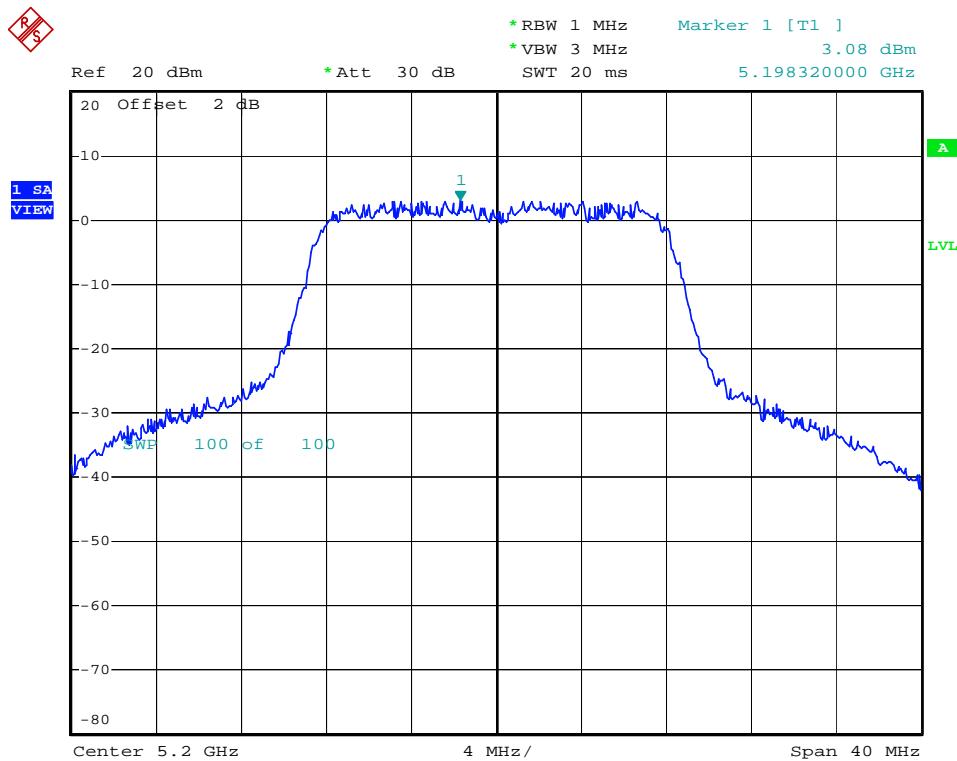

Date: 14.SEP.2006 15:37:13

## Power Density Plot on Configuration IEEE 802.11a / 5240 MHz

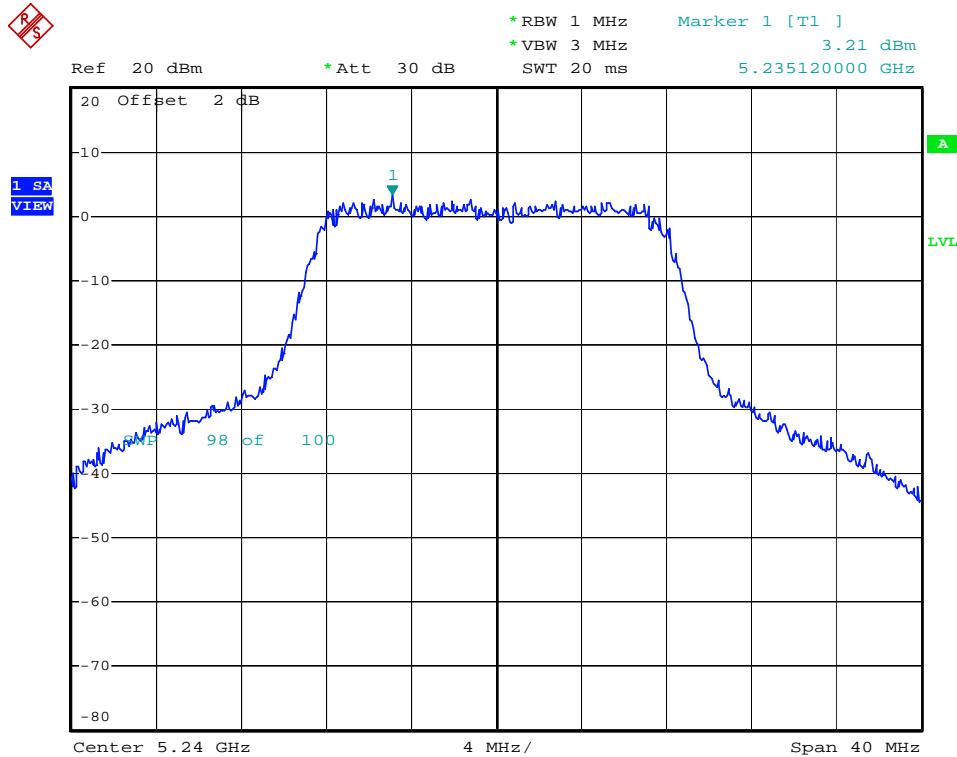

Date: 14.SEP.2006 15:44:24

## 4.5. Peak Excursion Measurement

### 4.5.1. Limit

The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the maximum conducted output power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emissions bandwidth whichever is less.

### 4.5.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of Spectrum Analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RB	1000 kHz (Peak Trace) / 1000 kHz (Average Trace)
VB	3000 kHz (Peak Trace) / 300 kHz (Average Trace)
Detector	Peak (Peak Trace) / Sample (Average Trace)
Trace	Max Hold
Sweep Time	60s

### 4.5.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. Set the spectrum analyzer span to view the entire emissions bandwidth. The largest difference between the following two traces (Peak Trace and Average Trace) must be  $\leq 13$  dB for all frequencies across the emissions bandwidth. Submit a plot.
3. Peak Trace: Set RBW = 1 MHz, VBW  $\geq$  3 MHz with peak detector and max-hold settings.
4. Average Trace: Method #3—video averaging with max hold--and sum power across the band. Set span to encompass the entire emissions bandwidth (EBW) of the signal. Set sweep trigger to “free run”. Set RBW = 1 MHz. Set VBW  $\geq 1/T$  (IEEE 802.11a VBW = 300kHz  $\geq 1/4 \mu s$ ). Use sample detector mode if bin width (i.e., span/number of points in spectrum)  $< 0.5$  RBW. Otherwise use peak detector mode . Set max hold. Allow max hold to run for 60 seconds.

### 4.5.4. Test Setup Layout

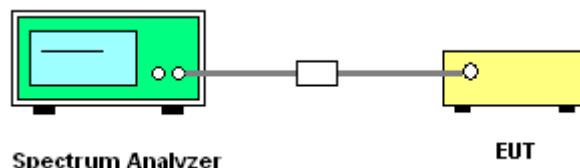

### 4.5.5. Test Deviation

There is no deviation with the original standard.

#### 4.5.6. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

#### 4.5.7. Test Result of Peak Excursion

Temperature	27	Humidity	52%
Test Engineer	Sam Lee	Configurations	802.11a


Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
5180 MHz	4.62	13	Complies
5200 MHz	4.30	13	Complies
5240 MHz	4.72	13	Complies

Peak Excursion Plot on Configuration IEEE 802.11a / 5180 MHz

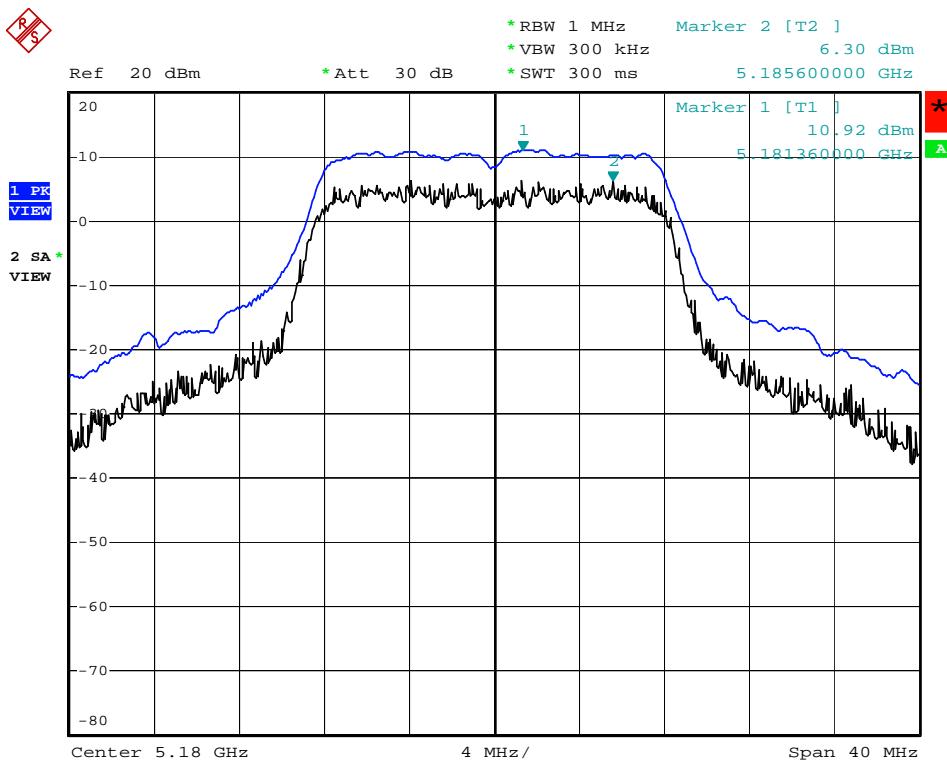


Date: 14.SEP.2006 15:36:40

### Peak Excursion Plot on Configuration IEEE 802.11a / 5200 MHz

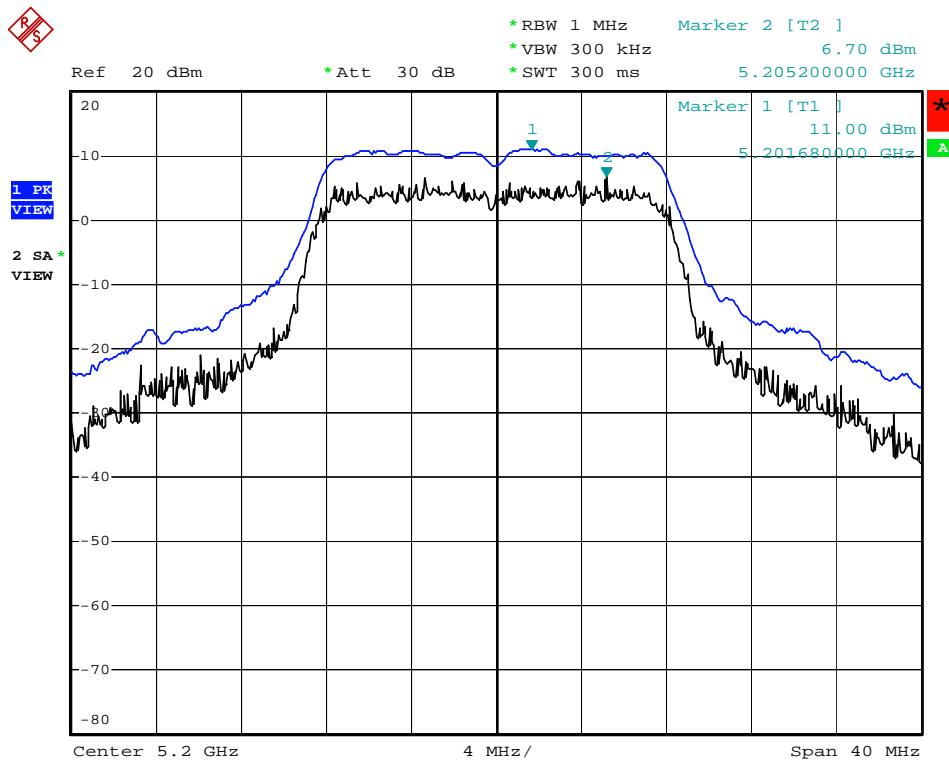

Date: 14.SEP.2006 15:37:36

### Peak Excursion Plot on Configuration IEEE 802.11a / 5240 MHz

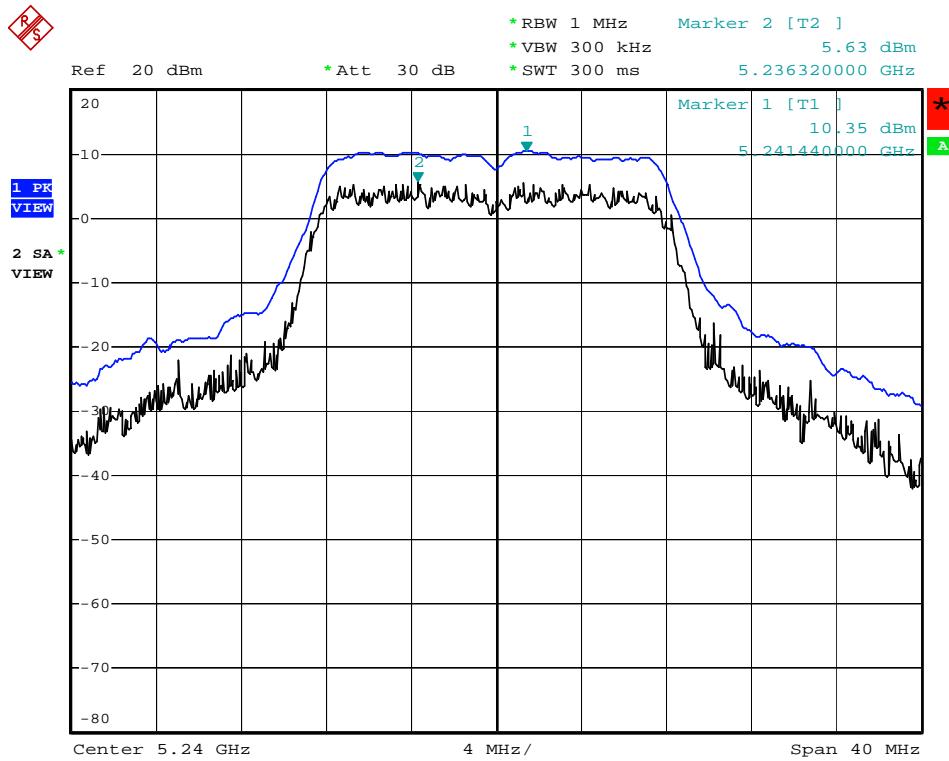

Date: 14.SEP.2006 15:44:47

## 4.6. Radiated Emissions Measurement

### 4.6.1. Limit

For transmitters operating in the 5.15-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). For transmitters operating in the 5.47-5.725 GHz band: all emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). For transmitters operating in the 5.725-5.825 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an EIRP of -17 dBm/MHz (78.3dBuV/m at 3m); for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	40 GHz
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1000KHz / 1000KHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

#### 4.6.3. Test Procedures


1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

#### 4.6.4. Test Setup Layout

For radiated emissions below 30MHz

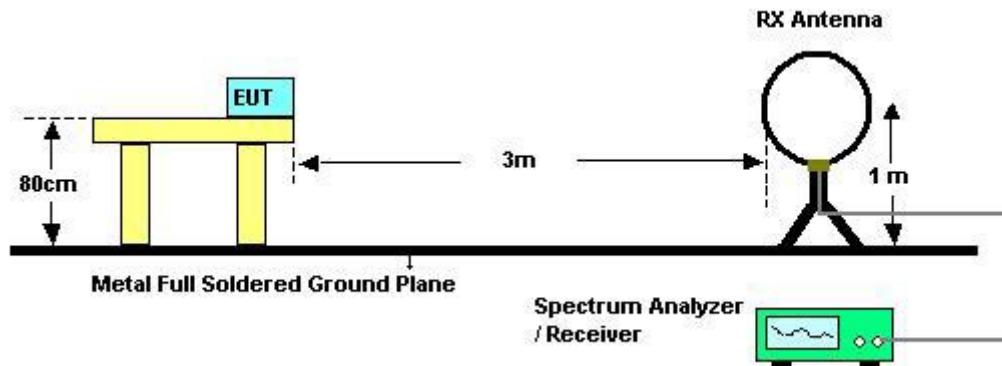

For radiated emissions above 30MHz

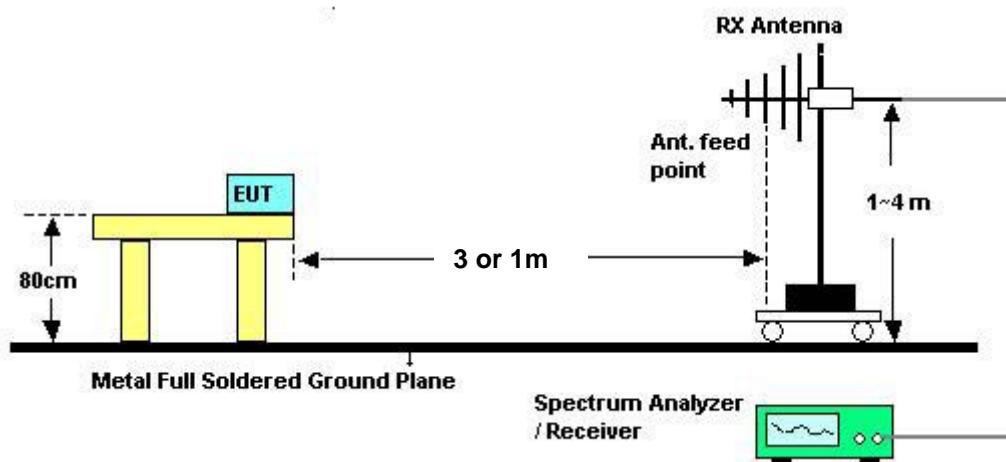

Above 5GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.

Distance extrapolation factor =  $20 \log (\text{specific distance [3m]} / \text{test distance [1m]})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [9.54 dB].

#### 4.6.5. Test Deviation

There is no deviation with the original standard.

#### 4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.6.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	29	Humidity	62%
Test Engineer	Vic Hsiao		

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

## 4.6.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	29	Humidity	62%
Test Engineer	Vic Hsiao	Configurations	Scanner RS-309 with long cable

Horizontal

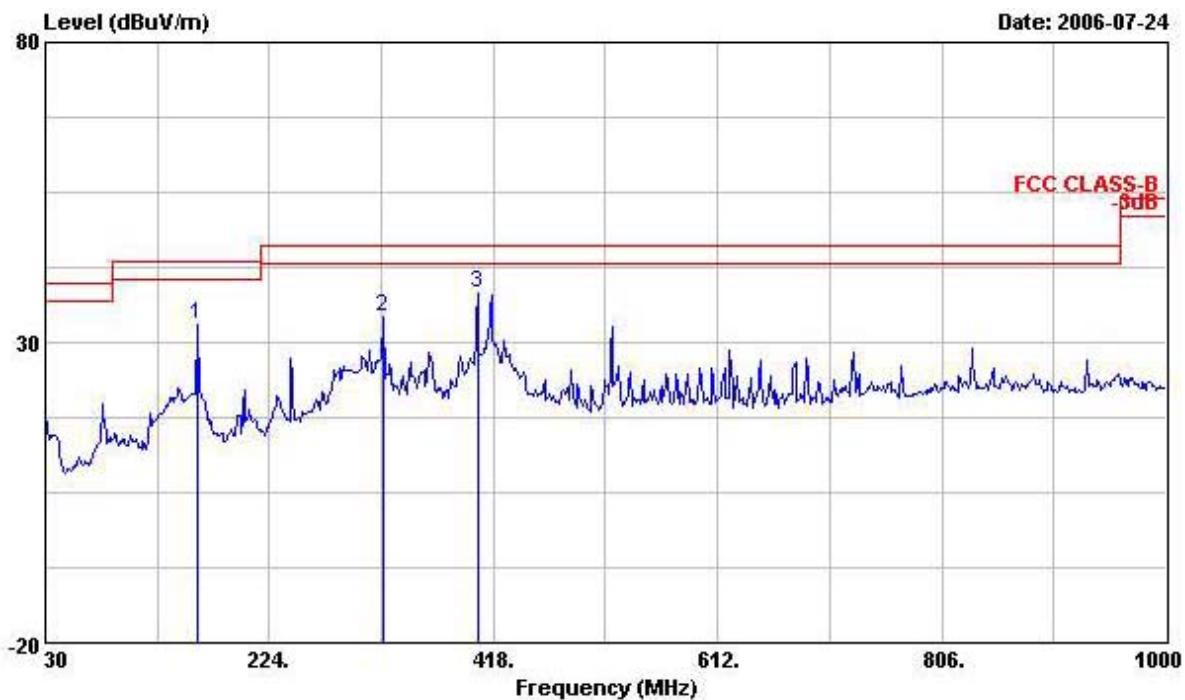

Freq	Level	Over Limit		Read	Antenna	Cable Preamp		Remark
		MHz	dB <sub>uV/m</sub>			dB <sub>uV</sub>	dB/m	
1		160.950	32.86	-10.64	43.50	49.19	9.98	1.76 28.08 Peak
2		322.940	34.30	-11.70	46.00	45.49	14.39	3.11 28.69 Peak
3 @		404.420	38.06	-7.94	46.00	46.83	16.94	3.40 29.11 Peak


## Vertical

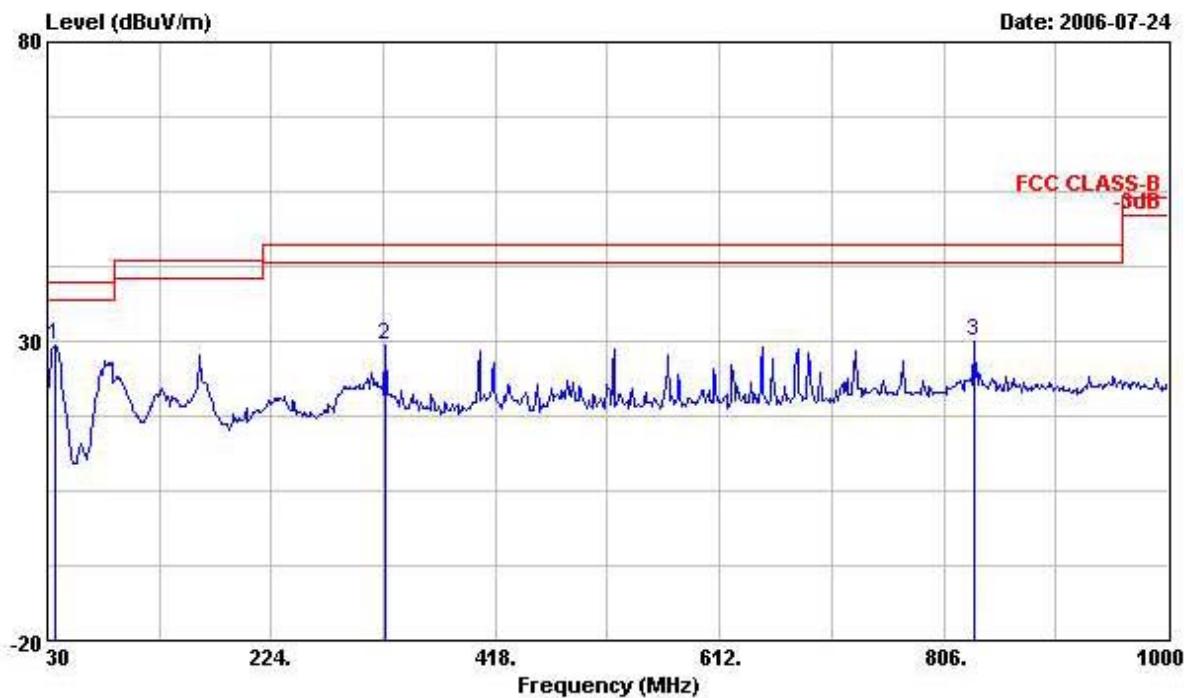


Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark
		Line	Limit	Level	Factor	dB/m	dB	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	
1	36.790	29.50	-10.50	40.00	42.50	14.29	0.53	27.81 Peak
2	322.940	29.24	-16.76	46.00	40.43	14.39	3.11	28.69 Peak
3	832.190	30.02	-15.98	46.00	33.25	21.11	5.36	29.70 Peak

Temperature	29	Humidity	62%
Test Engineer	Vic Hsiao	Configurations	Scanner RS-309 with short cable

Horizontal

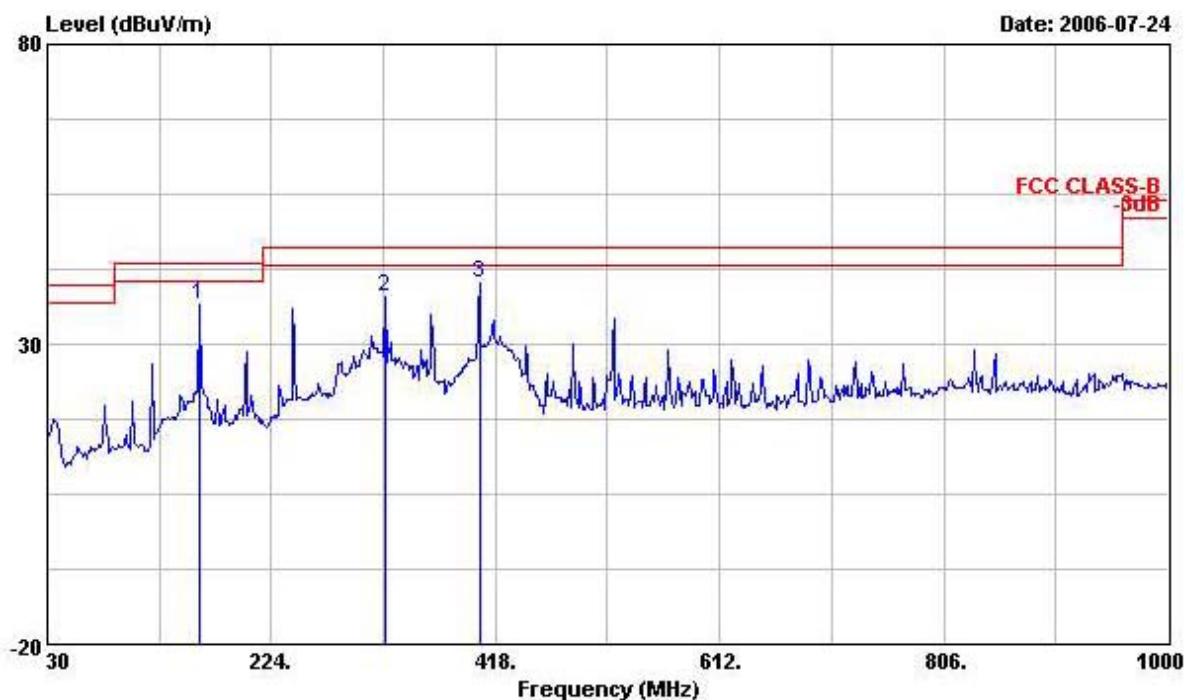


Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark
		Limit	Line	Level	Factor	Loss	Factor	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1 0	160.950	36.69	-6.81	43.50	53.02	9.98	1.76	28.08 Peak
2 0	322.940	37.95	-8.05	46.00	49.14	14.39	3.11	28.69 Peak
3 0	404.420	40.34	-5.66	46.00	49.11	16.94	3.40	29.11 Peak

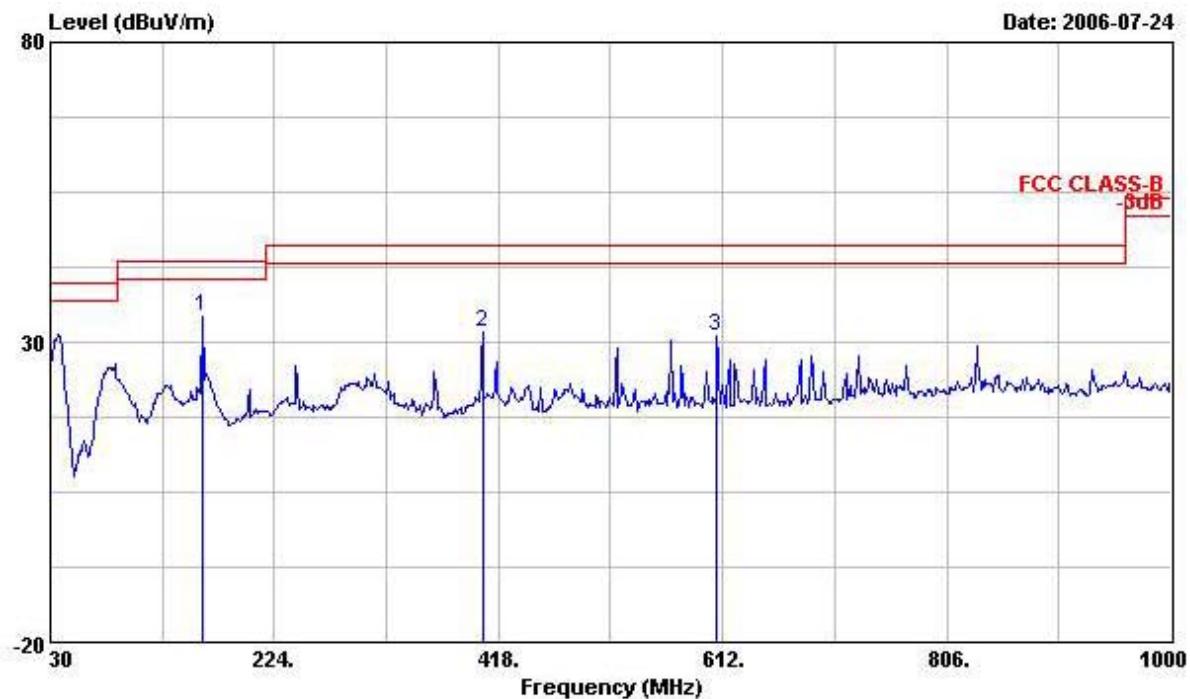*Vertical*


Freq	Level	Over Limit	Read		Antenna	Cable	Preamp	Remark
			Line	Level Factor				
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	160.950	34.39	-9.11	43.50	50.72	9.98	1.76	28.08 Peak
2	404.420	31.65	-14.35	46.00	40.42	16.94	3.40	29.11 Peak
3	607.150	31.14	-14.86	46.00	36.96	19.54	4.38	29.73 Peak


Temperature	29	Humidity	62%
Test Engineer	Vic Hsiao	Configurations	Scanner RS-409 with long cable

Horizontal

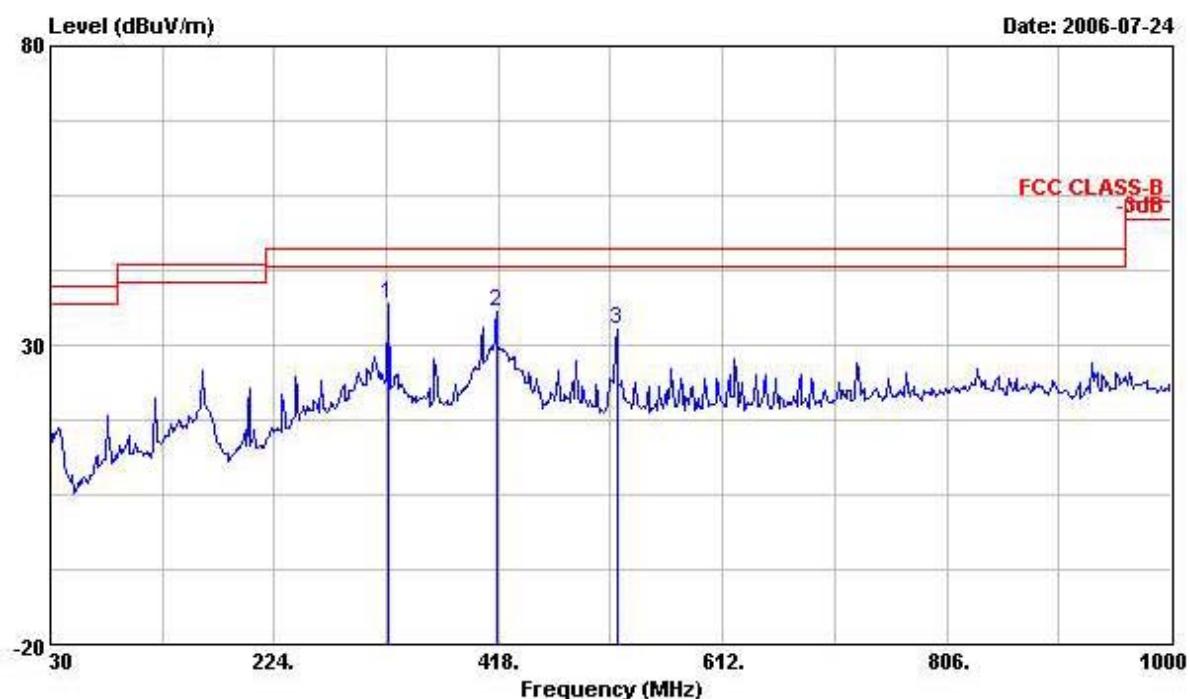

Freq	Level	Over Limit	Limit	Read		Antenna Level	Cable Factor	Preamp Factor	Remark
				MHz	dBuV/m				
1	322.940	36.88	-9.12	46.00	48.07	14.39	3.11	28.69	Peak
2	416.060	35.53	-10.47	46.00	43.66	17.37	3.48	28.98	Peak
3	520.820	32.73	-13.27	46.00	40.22	18.28	3.92	29.69	Peak

## Vertical

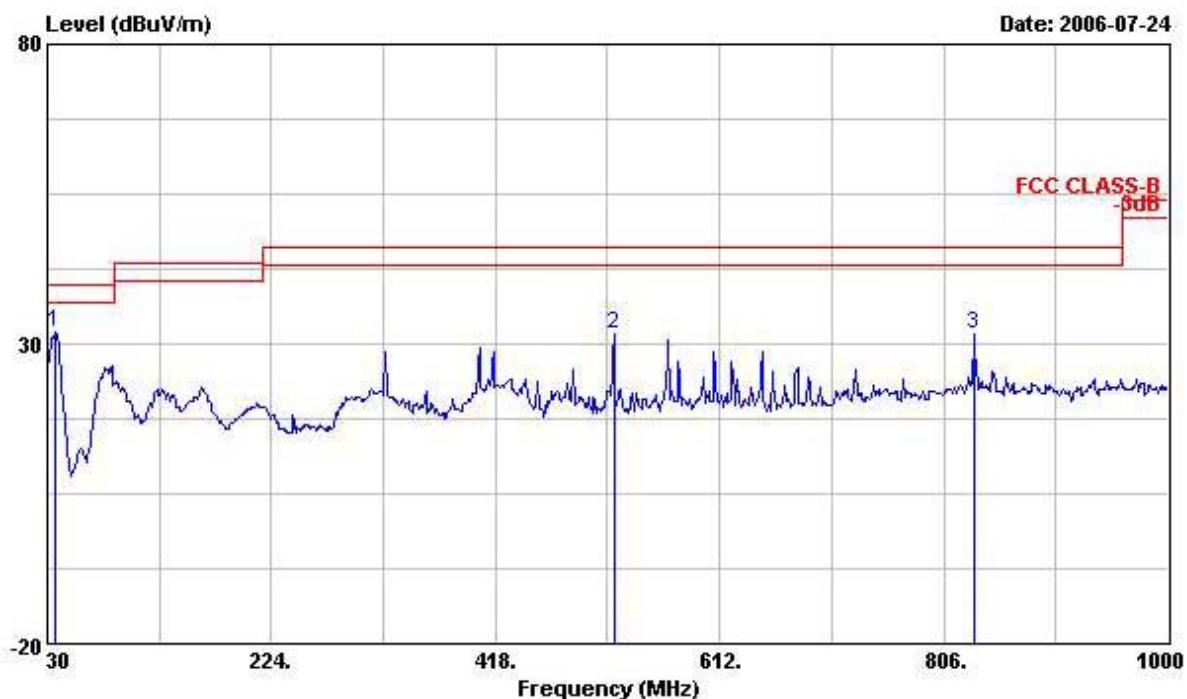


Freq	Level	Over Limit		Read	Antenna	Cable Preamp		Remark
		Line	Limit			Level	Factor	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1 @	36.790	31.85	-8.15	40.00	44.85	14.29	0.53	27.81 Peak
2	520.820	31.75	-14.25	46.00	39.24	18.28	3.92	29.69 Peak
3	832.190	31.63	-14.37	46.00	34.86	21.11	5.36	29.70 Peak




Temperature	29	Humidity	62%
Test Engineer	Vic Hsiao	Configurations	Scanner RS-409 with short cable

---

### *Horizontal*

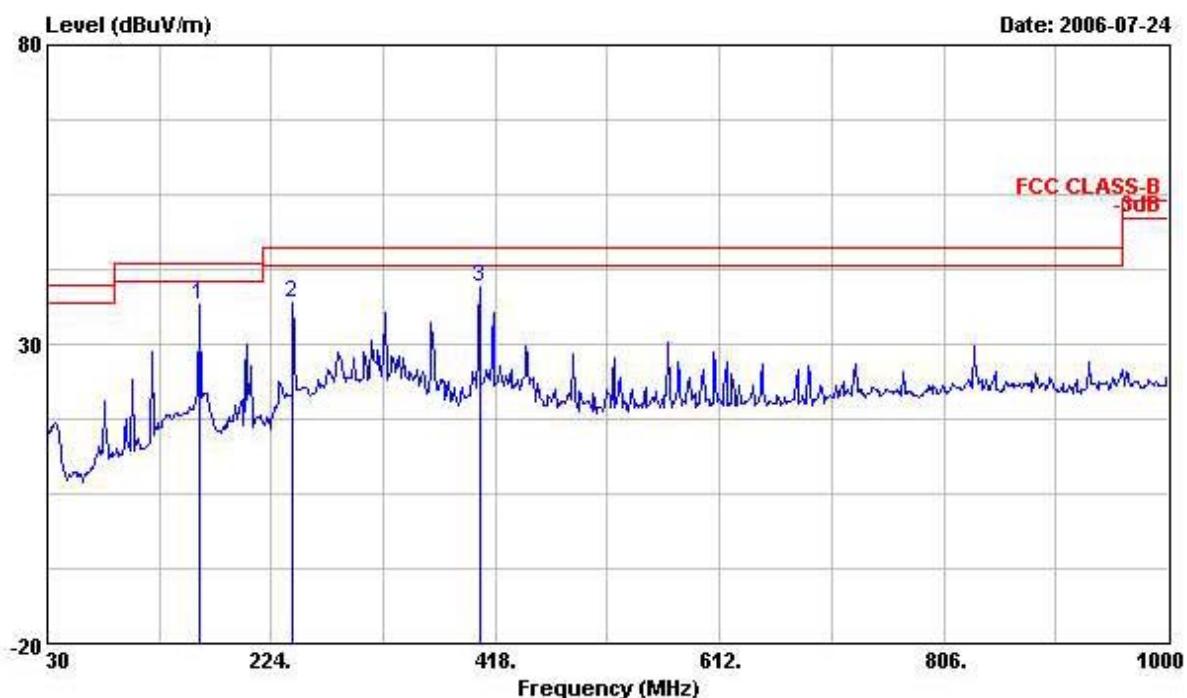


	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	
			Limit	Line	Level	Factor	Loss	Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1 @	160.950	36.49	-7.01	43.50	52.82	9.98	1.76	28.08	Peak
2	242.430	36.85	-9.15	46.00	50.51	12.07	2.64	28.36	Peak
3 @	404.420	39.59	-6.41	46.00	48.36	16.94	3.40	29.11	Peak

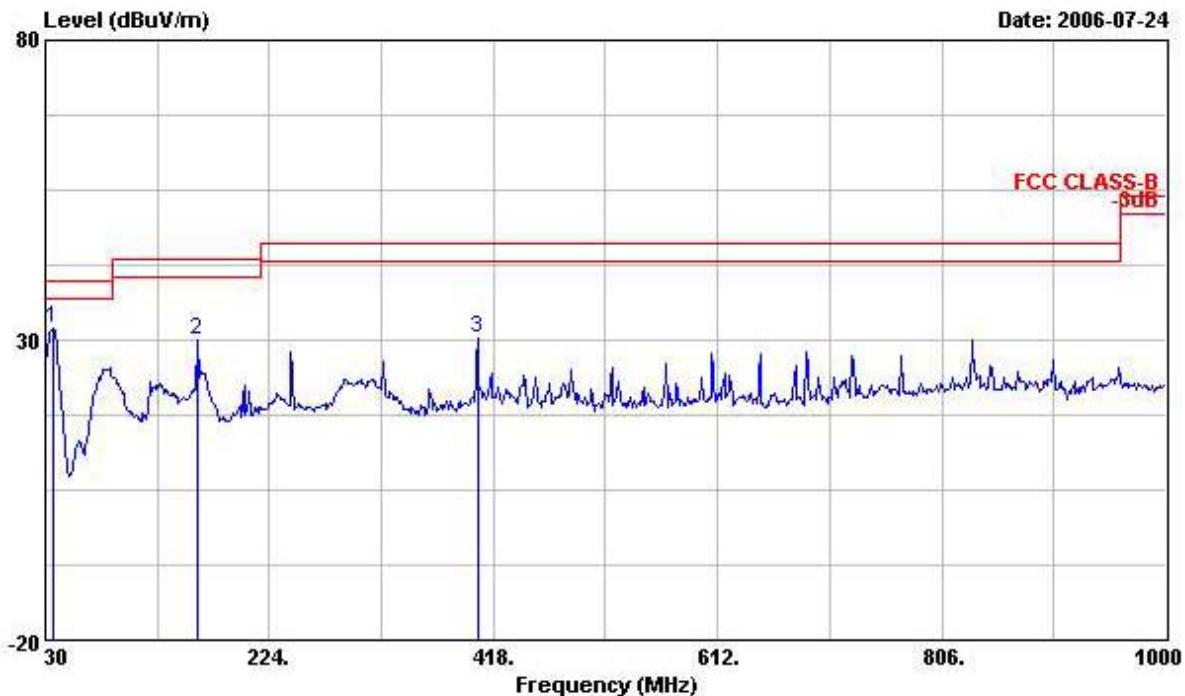*Vertical*


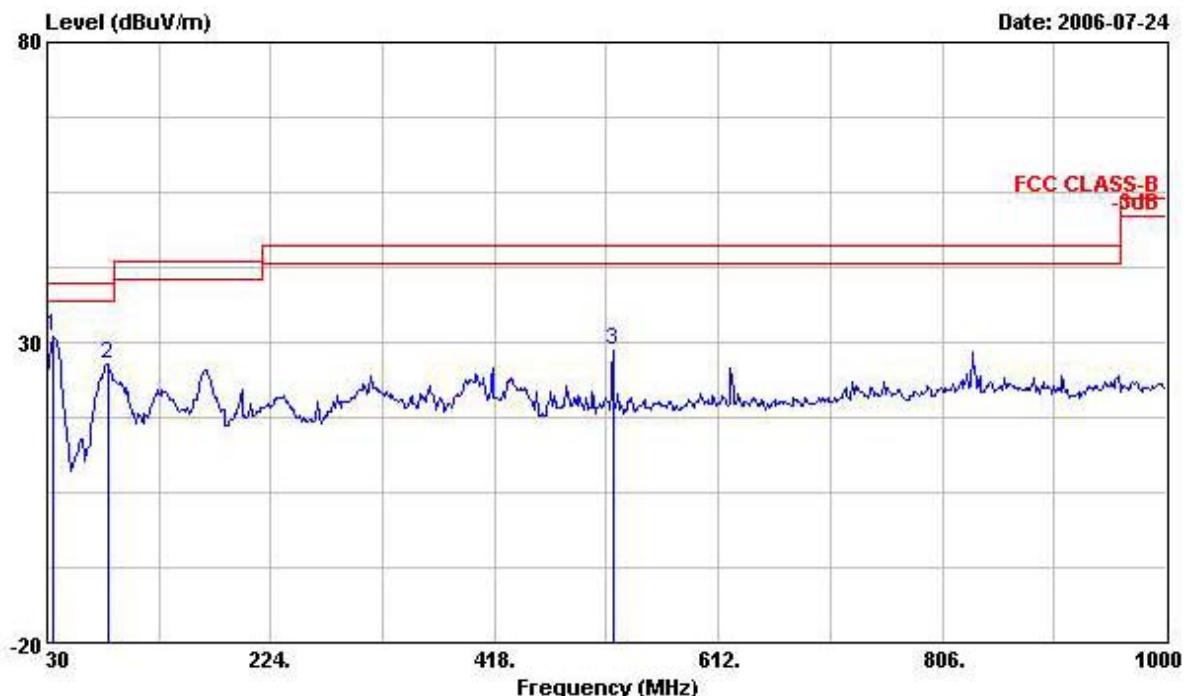
Freq	Level	Over Limit		Read	Antenna	Cable Preamp		Remark
		Line	Limit			Level	Factor	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1 0	36.790	32.02	-7.98	40.00	45.02	14.29	0.53	27.81 Peak
2	160.950	30.10	-13.40	43.50	46.43	9.98	1.76	28.08 Peak
3	404.420	30.46	-15.54	46.00	39.23	16.94	3.40	29.11 Peak

Temperature	29	Humidity	62%
Test Engineer	Vic Hsiao	Configurations	Charging Mode

## Horizontal

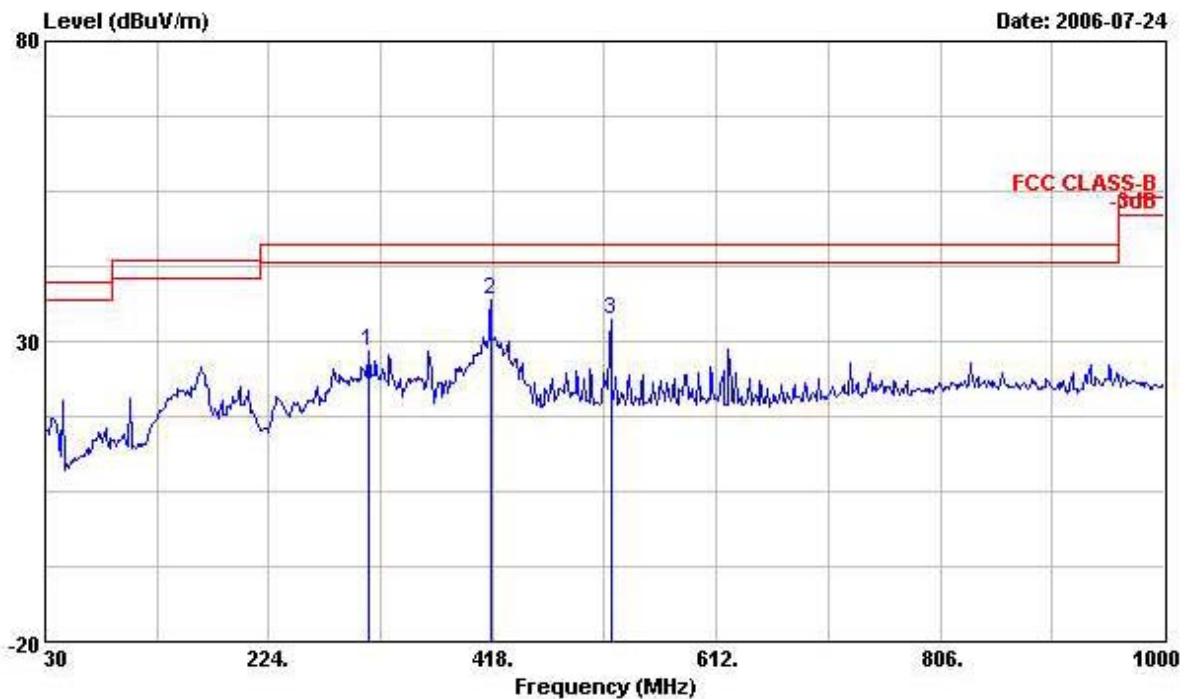

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark
			Limit	Line	Level	Factor	dB/m	dB	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	311.300	28.26	-17.74	46.00	39.95	13.97	2.98	28.64	Peak
2	416.060	36.90	-9.10	46.00	45.03	17.37	3.48	28.98	Peak
3	520.820	33.60	-12.40	46.00	41.09	18.28	3.92	29.69	Peak

*Vertical*


Freq	Level	Over Limit		Read	Antenna	Cable		Preamp	Remark
		MHz	dBuV/m			dB	dBuV/m	dB	
1 @	35.820	30.99	-9.01	40.00	43.41	14.88	0.50	27.80	Peak
2	82.380	26.38	-13.62	40.00	45.29	7.55	1.33	27.80	Peak
3	520.820	28.56	-17.44	46.00	36.05	18.28	3.92	29.69	Peak

**Note:**

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

## 4.6.9. Results for Radiated Emissions (1GHz~40GHz)


Temperature	29	Humidity	62%
Test Engineer	Vic Hsiao	Configurations	802.11a CH 36

Horizontal

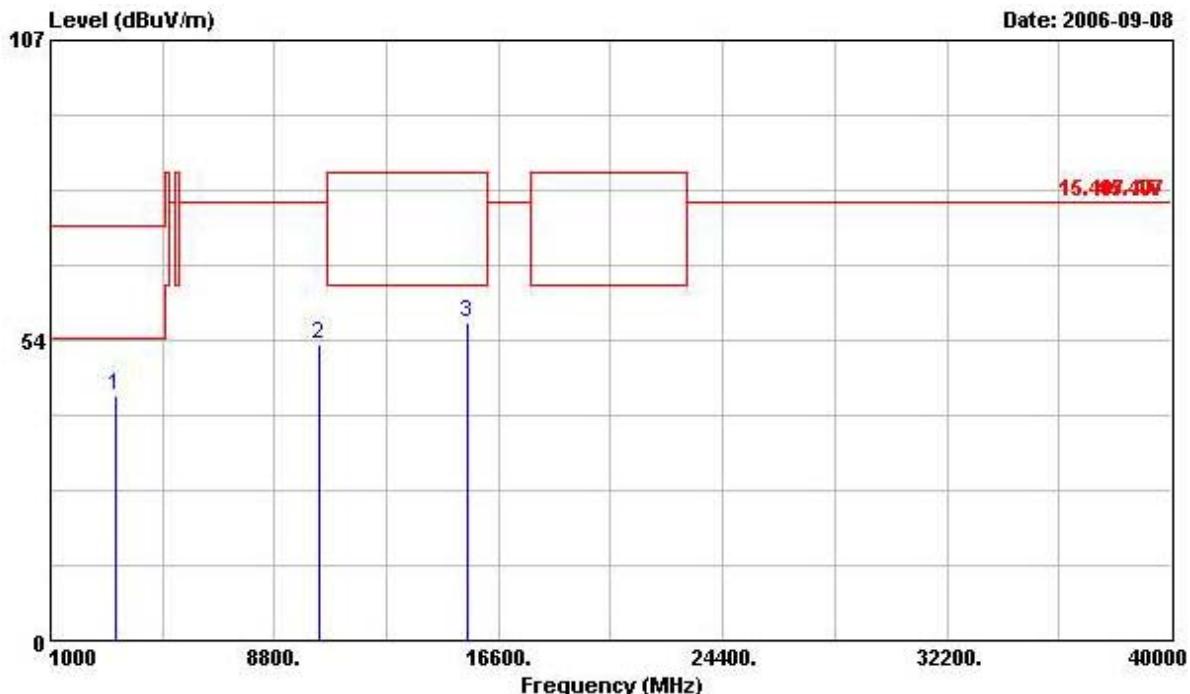

Freq	Level	Over Limit		ReadAntenna		Cable Preamp		Remark
		MHz	dBuV/m	dB	Line	Level Factor	dB	
1	3264.000	43.82	-30.18	74.00	43.45	30.62	2.45	32.70 PEAK
2	10360.000	52.75	-25.55	78.30	41.86	38.83	4.53	32.48 PEAK
3	15540.000	56.84	-26.66	83.50	45.39	37.75	6.32	32.62 PEAK


## Vertical

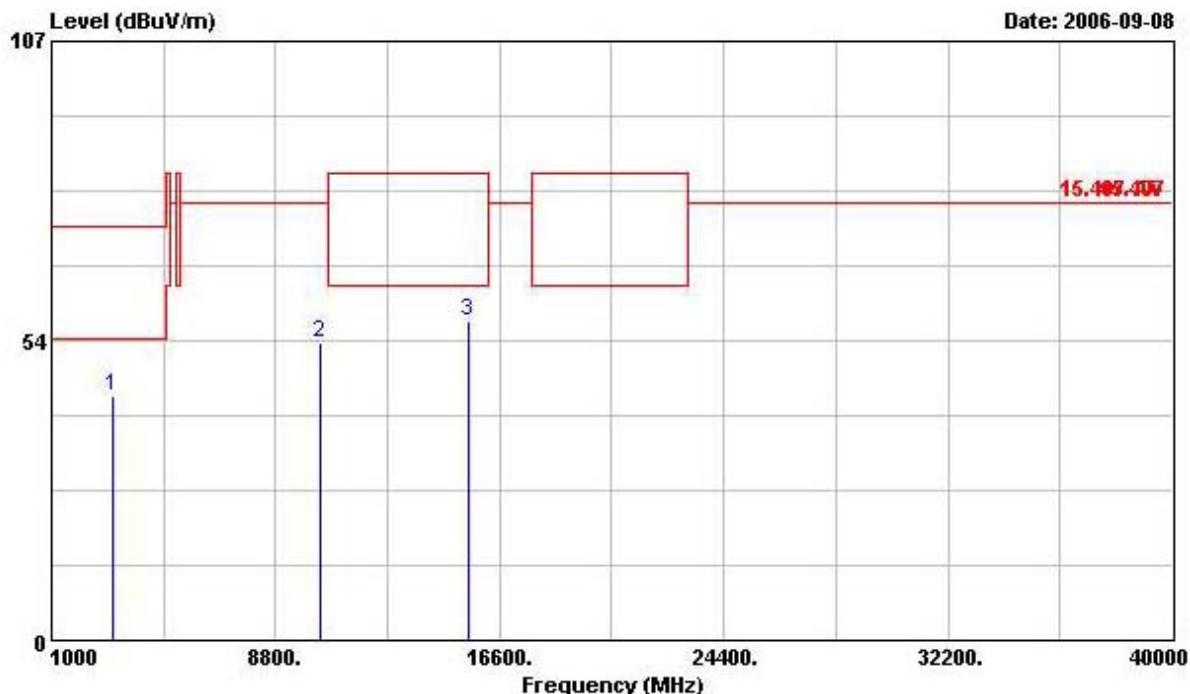


Freq	Level	Over Limit		Read	Antenna	Cable		Preamp	Remark
		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	
1	3132.000	43.55	-30.45	74.00	43.59	30.29	2.38	32.71	PEAK
2	10360.000	53.30	-25.00	78.30	42.42	38.83	4.53	32.48	PEAK
3	15540.000	56.91	-26.59	83.50	45.46	37.75	6.32	32.62	PEAK

Temperature	29	Humidity	62%
Test Engineer	Vic Hsiao	Configurations	802.11a CH 40

## Horizontal

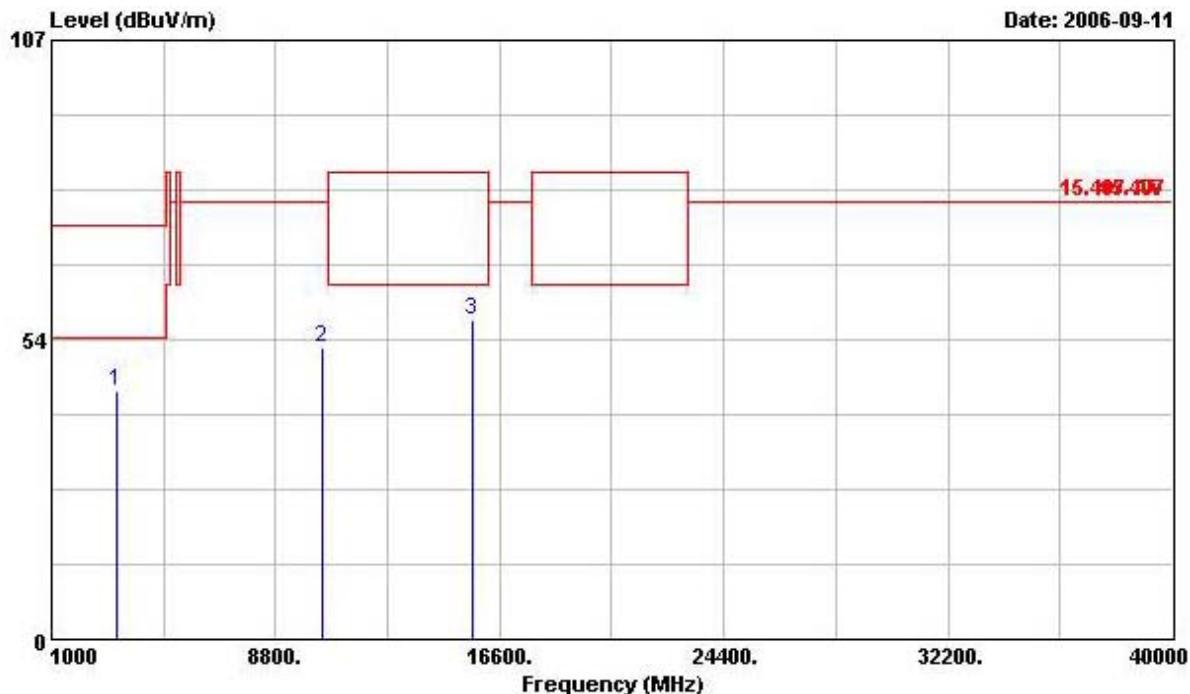


Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark
		Limit	Line	Level	Factor	dB/m	dB	
1	3273.000	44.24	-29.76	74.00	43.83	30.66	2.45	32.70 PEAK
2	10440.000	52.19	-26.11	78.30	41.31	38.77	4.52	32.41 PEAK
3	15660.000	57.11	-26.39	83.50	45.80	37.58	6.37	32.64 PEAK

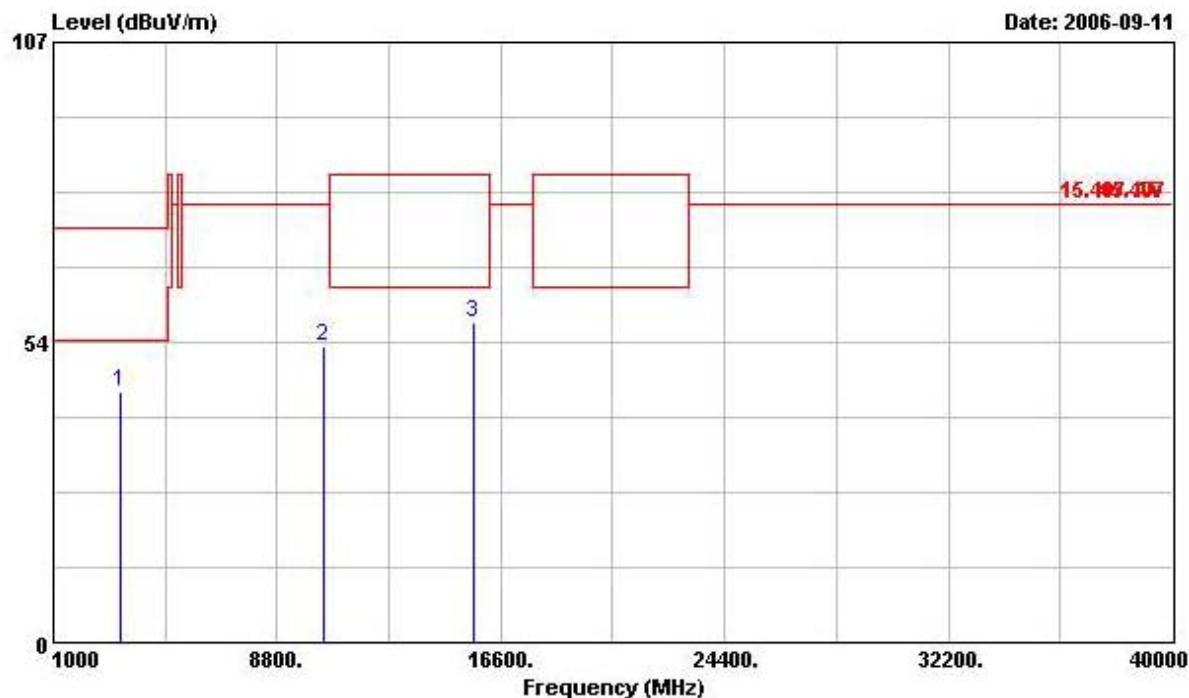*Vertical*


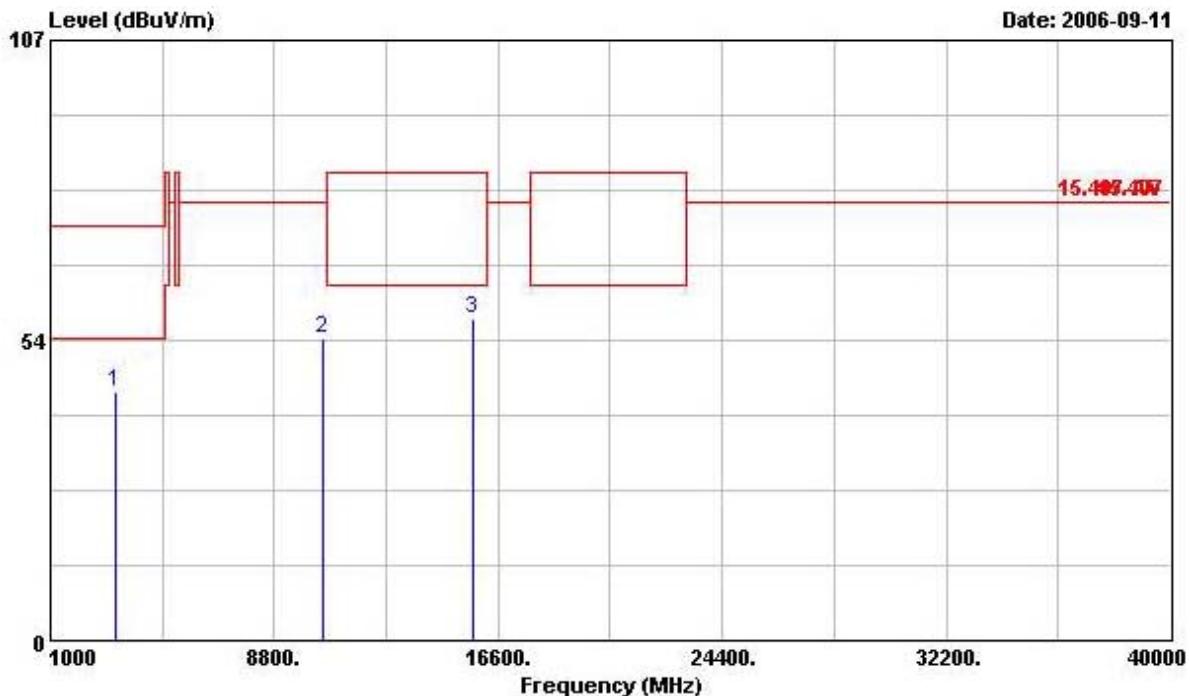
Freq	Level	Over Limit		Read	Antenna	Cable		Preamp	Remark
		Line	Limit			Level	Factor		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		
1	3309.000	44.84	-29.16	74.00	44.31	30.74	2.48	32.70	PEAK
2	10440.000	52.97	-25.33	78.30	42.09	38.77	4.52	32.41	PEAK
3	15660.000	57.18	-26.32	83.50	45.87	37.58	6.37	32.64	PEAK

Temperature	29	Humidity	62%
Test Engineer	Vic Hsiao	Configurations	802.11a CH 48

## Horizontal

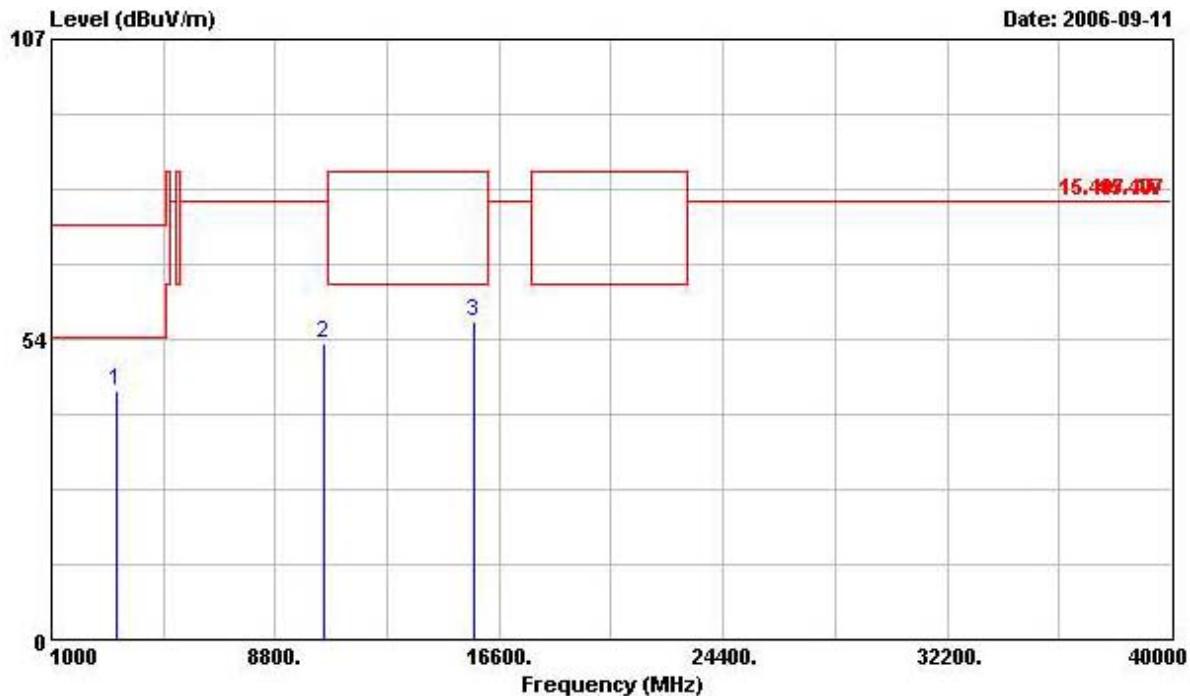

Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark
		Limit	Line	Level	Factor	Loss	Factor	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	3291.000	44.19	-29.81	74.00	43.71	30.70	2.48	32.70 PEAK
2	10480.000	52.87	-25.43	78.30	41.99	38.72	4.52	32.36 PEAK
3	15720.000	56.75	-26.75	83.50	45.52	37.49	6.39	32.66 PEAK

**Vertical**


Freq	Level	Over Limit		ReadAntenna		Cable Preamp		Remark
		MHz	dBuV/m	dB	Line	Level Factor	dB/m	
1	3273.000	44.37	-29.63	74.00	43.96	30.66	2.45	32.70 PEAK
2	10476.000	53.83	-24.47	78.30	42.94	38.73	4.52	32.36 PEAK
3	15720.000	57.32	-26.18	83.50	46.09	37.49	6.39	32.66 PEAK

**Note:**

The amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

The limits above 5GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.

Distance extrapolation factor = 20 log (specific distance [3m] / test distance [1m]) (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [9.54 dB].

## 4.7. Band Edge Emissions Measurement

### 4.7.1. Limit

For transmitters operating in the 5.15-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). For transmitters operating in the 5.47-5.725 GHz band: all emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). For transmitters operating in the 5.725-5.825 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an EIRP of -17 dBm/MHz (78.3dBuV/m at 3m); for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.7.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1 MHz /1 MHz for Peak

### 4.7.3. Test Procedures

1. The test procedure is the same as section 4.6.3, only the frequency range investigated is limited to 100MHz around bandedges.
2. In case the emission is fail due to the used RB/VB is too wide, marker-delta method of FCC Public Notice DA00-705 will be followed.

### 4.7.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.6.4.

#### 4.7.5. Test Deviation

There is no deviation with the original standard.

#### 4.7.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.7.7. Test Result of Band Edge and Fundamental Emissions

Temperature	20	Humidity	70%
Test Engineer	Ted Chiu	Configurations	802.11a Channel 36, 48

##### Channel 36

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark
			Limit	Line	Level	Factor	Loss	Factor	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1 @	5143.500	69.84	-13.66	83.50	32.87	33.64	3.33	0.00	Peak
2 @	5182.300	118.32				33.69	3.37	0.00	Peak
1 @	5143.500	58.34	-5.16	63.50	21.37	33.64	3.33	0.00	Average
2 @	5182.300	108.36				33.69	3.37	0.00	Average

Item 1 is Band Edge.

##### Channel 48

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark
			Limit	Line	Level	Factor	Loss	Factor	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	5150.000	66.63	-11.67	78.30	29.66	33.64	3.33	0.00	Peak
2 @	5234.800	112.63				33.77	3.45	0.00	Peak
3	5350.000	67.66	-10.64	78.30	30.13	33.96	3.57	0.00	Peak
1	5150.000	55.11	-8.39	63.50	18.14	33.64	3.33	0.00	Average
2 @	5234.800	102.85				33.77	3.45	0.00	Average
3	5350.000	55.30	-8.20	63.50	17.77	33.96	3.57	0.00	Average

Item 1, 3 is Band Edge.

##### Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)


Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

The limits above 5GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.


Distance extrapolation factor = 20 log (specific distance [3m] / test distance [1m]) (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [9.54 dB].

**EIRP Emission in Band on Configuration IEEE 802.11a / 5180 MHz**

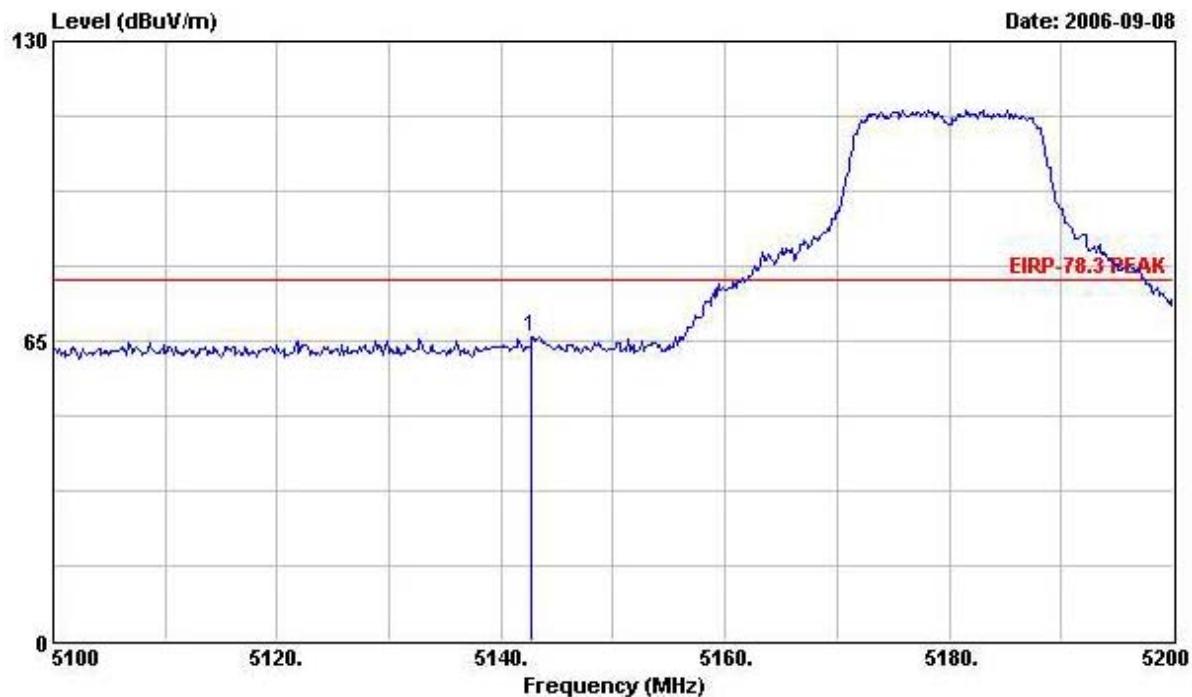

**EIRP Emission in Band on Configuration IEEE 802.11a / 5240 MHz**

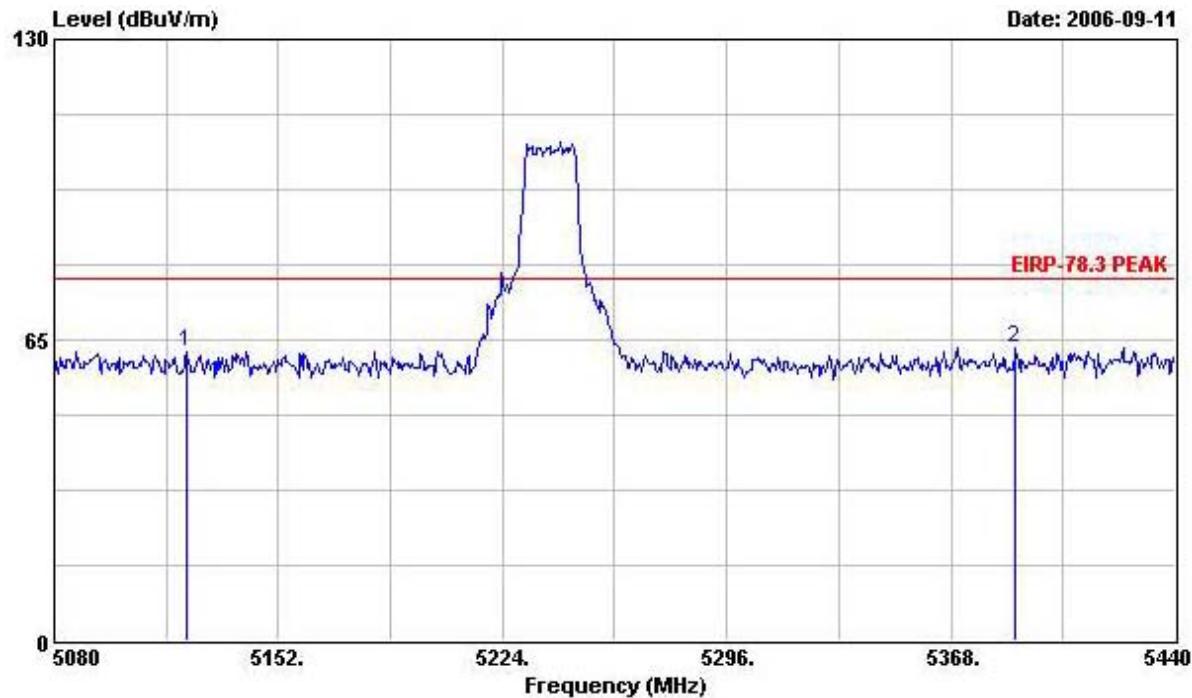

## 4.8. Frequency Stability Measurement

### 4.8.1. Limit

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emissions is maintained within the band of operation under all conditions of normal operation as specified in the user's manual or  $\pm 20\text{ppm}$  (IEEE 802.11a specification).

### 4.8.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RB	10 kHz
VB	10 kHz
Sweep Time	Auto

### 4.8.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyser.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5.  $f_c$  is declaring of channel frequency. Then the frequency error formula is  $(f_c-f)/f_c \times 10^6$  ppm and the limit is less than  $\pm 20\text{ppm}$  (IEEE 802.11a specification).
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature rule is  $-30^\circ\text{C} \sim 50^\circ\text{C}$ .

### 4.8.4. Test Setup Layout

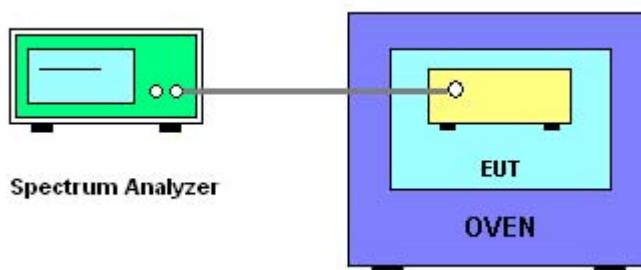

#### 4.8.5. Test Deviation

There is no deviation with the original standard.

#### 4.8.6. EUT Operation during Test

The EUT was programmed to be in continuously un-modulation transmitting mode.

#### 4.8.7. Test Result of Frequency Stability

##### Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5260
126.50	5259.9548
110.00	5259.9528
93.50	5259.9537
Max. Deviation (MHz)	0.0472
Max. Deviation (ppm)	8.9734

##### Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)
( )	5260
-30	5259.9574
-20	5259.9567
-10	5259.9554
0	5259.9564
10	5259.9532
20	5259.9528
30	5259.9511
40	5259.9504
50	5259.9487
Max. Deviation (MHz)	0.0513
Max. Deviation (ppm)	9.7529

## 4.9. Antenna Requirements

### 4.9.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited.

### 4.9.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

## 5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100174	9kHz – 2.75GHz	Feb. 22, 2006	Conduction (CO04-HY)
LISN	MessTec	NNB-2/16Z	99079	9kHz – 30MHz	Dec. 19, 2005	Conduction (CO04-HY)
LISN (Support Unit)	EMCO	3810/2NM	9708-1839	9kHz – 30MHz	Mar. 18, 2006	Conduction (CO04-HY)
RF Cable-CON	UTIFLEX	3102-26886-4	CB049	9kHz – 30MHz	Apr. 20, 2006	Conduction (CO04-HY)
EMI Filter	LINDGREN	LRE-2030	2651	< 450 Hz	N/A	Conduction (CO04-HY)
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30 MHz - 1 GHz 3m	Jun. 15, 2006	Radiation (03CH03-HY)
Amplifier	SCHAFFNER	CPA9231A	3565	9 kHz - 2 GHz	Jan. 18, 2006	Radiation (03CH03-HY)
Amplifier	Agilent	8449B	3008A02120	1 GHz - 26.5 GHz	May 29, 2006	Radiation (03CH03-HY)
Spectrum Analyzer	R&S	FSP40	100004/040	9 kHz - 40 GHz	Sep. 30, 2005	Radiation (03CH03-HY)
Bilog Antenna	SCHAFFNER	CBL 6112D	22237	30 MHz – 1 GHz	Jul. 24, 2006	Radiation (03CH03-HY)
Horn Antenna	EMCO	3115	6903	1GHz ~ 18GHz	Mar. 15, 2006	Radiation (03CH03-HY)
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15 GHz - 40 GHz	NCR	Radiation (03CH03-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	30 MHz - 1 GHz	Dec. 02, 2005	Radiation (03CH03-HY)
RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	1 GHz - 40 GHz	Dec. 02, 2005	Radiation (03CH03-HY)
Turn Table	HD	DS 420	420/650/00	0 – 360 degree	N/A	Radiation (03CH03-HY)
Antenna Mast	HD	MA 240	240/560/00	1 m - 4 m	N/A	Radiation (03CH03-HY)
Spectrum Analyzer	R&S	FSP30	100023	9kHz ~ 30GHz	Nov. 26, 2005	Conducted (TH01-HY)
Power Meter	R&S	NRVS	100764	DC ~ 40GHz	Jul. 20, 2006	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z51	100666	DC ~ 40GHz	Jul. 19, 2006	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z32	100057	30MHz ~ 6GHz	Jun. 10, 2006	Conducted (TH01-HY)
DC Power Source	G.W.	GPC-6030D	C671845	DC 1V ~ 60V	Dec. 28, 2005	Conducted (TH01-HY)
Temp. and Humidity Chamber	KSON	THS-C3L	612	N/A	Oct. 01, 2005	Conducted (TH01-HY)
RF CABLE-1m	Jye Bao	RG142	CB034-1m	20MHz ~ 7GHz	Dec. 30, 2005	Conducted (TH01-HY)
RF CABLE-2m	Jye Bao	RG142	CB035-2m	20MHz ~ 1GHz	Dec. 30, 2005	Conducted (TH01-HY)
Oscilloscope	Tektronix	TDS1012	CO38515	100MHz / 1GS/s	Jun. 20, 2006	Conducted (TH01-HY)
Signal Generator	R&S	SMR40	100116	10MHz ~ 40GHz	Dec. 30, 2005	Conducted (TH01-HY)
Data Generator	Tektronix	DG2030	063-2920-50	0.1Hz~400MHz	Jun. 16, 2006	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Amplifier	MITEQ	AMF-6F-260400	923364	26.5 GHz - 40 GHz	Jan. 24, 2006*	Radiation (03CH03-HY)
Loop Antenna	R&S	HFH2-Z2	860004/001	9 kHz - 30 MHz	May 23, 2006*	Radiation (03CH03-HY)
AC Power Source	HPC	HPA-500W	HPA-9100024	AC 0 ~ 300V	Apr. 21, 2005*	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is two year.

## 6. TEST LOCATION

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 <sup>nd</sup> Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 728, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

## 7. NVLAP CERTIFICATE OF ACCREDITATION

United States Department of Commerce  
National Institute of Standards and Technology



### Certificate of Accreditation to ISO/IEC 17025:1999

NVLAP LAB CODE: 200079-0

**Sportun International, Inc. Hwa Ya EMC Laboratory**

Tao Yuan Hsien 333  
TAIWAN

*is recognized by the National Voluntary Laboratory Accreditation Program for conformance with criteria set forth in  
NIST Handbook 150:2001 and all requirements of ISO/IEC 17025:1999.  
Accreditation is granted for specific services, listed on the Scope of Accreditation, for:*


**ELECTROMAGNETIC COMPATIBILITY AND TELECOMMUNICATIONS**

2006-01-01 through 2006-12-31

*Effective dates*



*For the National Institute of Standards and Technology*



NVLAP-01C (REV. 2005-05-19)