



# TEST REPORT

## 47 CFR Part 15, Subpart C 15.247

Report Reference No.:

CTL2211015011-WFM1

Compiled by:  
( position+printed name+signature)


Happy Guo  
(File administrators)

Tested by:  
( position+printed name+signature)

Yapeng Jin  
(Test Engineer)

Approved by:  
( position+printed name+signature)

Ivan Xie  
(Manager)

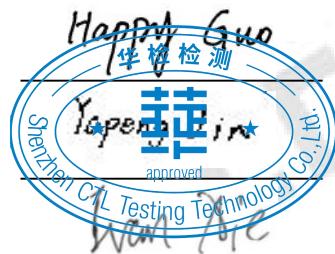

**Product Name**.....: Wireless Party Speaker

**Model/Type reference**.....: 100094812

**List Model(s)**.....: N/A

**Trade Mark**.....: **onn. onn**

**FCC ID**.....: HBOPA2322

**Applicant's name**.....: **SHENZHEN FENDA TECHNOLOGY CO., LTD.**

**Address of applicant**.....: Fenda Hi-Tech Park, Zhoushi Road, Shiyan Street, Baoan District, Shenzhen, China

**Test Firm**.....: **Shenzhen CTL Testing Technology Co., Ltd.**

**Address of Test Firm**.....: Floor 1-A, Baisha Technology Park, No.3011, Shahexi Road, Nanshan District, Shenzhen, China 518055

**Test specification**.....:

**Standard**.....: **47 CFR Part 15, Subpart C 15.247**: Operation within the bands 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz.

**TRF Originator**.....: Shenzhen CTL Testing Technology Co., Ltd.

**Master TRF**.....: Dated 2011-01

**Date of receipt of test item**.....: August 15, 2025

**Date of Test Date**.....: August 15, 2025-August 27, 2025

**Date of Issue**.....: August 29, 2025

**Result**.....: **Pass**

**Shenzhen CTL Testing Technology Co., Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTL Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTL Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

# TEST REPORT

<b>Test Report No. :</b>	<b>CTL2211015011-WFM1</b>	August 29, 2025
<b>Date of issue</b>		

Equipment under Test : Wireless Party Speaker

Sample No : CTL250814615001

Model /Type : 100094812

Listed Models : N/A

**Applicant** : **SHENZHEN FENDA TECHNOLOGY CO., LTD.**

Address : Fenda Hi-Tech Park, Zhoushi Road, Shiyan Street, Baoan District, Shenzhen, China

**Manufacturer** : **SHENZHEN FENDA TECHNOLOGY CO., LTD.**

Address : Fenda Hi-Tech Park, Zhoushi Road, Shiyan Street, Baoan District, Shenzhen, China

<b>Test result</b>	<b>Pass *</b>
--------------------	---------------

\*In the configuration tested, the EUT complied with the standards specified page 5.

The test results presented in this report relate only to the object tested.

This report shall not be reproduced, except in full, without the written approval of the issuing testing laboratory.

## \*\* Modified History \*\*

	Table of Contents	Page
<b>1. SUMMARY .....</b>		<b>5</b>
1.1. TEST STANDARDS .....		5
1.2. TEST DESCRIPTION .....		5
1.3. TEST FACILITY .....		6
1.4. STATEMENT OF THE MEASUREMENT UNCERTAINTY .....		6
<b>2. GENERAL INFORMATION .....</b>		<b>8</b>
2.1. ENVIRONMENTAL CONDITIONS .....		8
2.2. GENERAL DESCRIPTION OF EUT .....		8
2.3. DESCRIPTION OF TEST MODES AND TEST FREQUENCY .....		9
2.4. EQUIPMENTS USED DURING THE TEST .....		10
2.5. RELATED SUBMITTAL(S) / GRANT (S) .....		10
2.6. MODIFICATIONS .....		10
<b>3. TEST CONDITIONS AND RESULTS .....</b>		<b>11</b>
3.1. CONDUCTED EMISSIONS TEST .....		11
3.2. RADIATED EMISSIONS AND BAND EDGE .....		14
<b>4. TEST SETUP PHOTOS OF THE EUT .....</b>		<b>18</b>
<b>5. PHOTOS OF THE EUT .....</b>		<b>19</b>

## 1. SUMMARY

### 1.1. TEST STANDARDS

The tests were performed according to following standards:

[47 CFR Part 15, Subpart C 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

[ANSI C63.10: 2013](#): American National Standard for Testing Unlicensed Wireless Devices

[KDB 558074 D01 v05r02](#): KDB558074 D01 15.247 Meas Guidance v05r02

### 1.2. Test Description

<b>47 CFR Part 15, Subpart C 15.247</b>		
47 CFR Part 15, Subpart C 15.207	AC Power Conducted Emission	PASS
47 CFR Part 15, Subpart C 15.205/15.209	Radiated Emissions	PASS

## 1.3. Test Facility

### 1.3.1 Address of the test laboratory

Shenzhen CTL Testing Technology Co.,Ltd.

Floor 1-A, Baisha Technology Park, No.3011, Shahexi Road, Nanshan District, Shenzhen, China 518055

There is one 3m semi-anechoic chamber and two line conducted labs for final test. The Test Sites meet the requirements in documents ANSI C63.10 and CISPR 32/EN 55032 requirements.

### 1.3.2 Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

#### CNAS-Lab Code: L7497

Shenzhen CTL Testing Technology Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2017 General Requirements) for the Competence of Testing and Calibration Laboratories.

#### A2LA-Lab Cert. No. 4343.01

Shenzhen CTL Testing Technology Co., Ltd, EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

#### IC Registration No.: 9618B

#### CAB identifier: CN0041

The 3m alternate test site of Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements with Registration No.: 9618B.

#### FCC-Registration No.: 399832

#### Designation No.: CN1216

Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 399832.

## 1.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements" and is documented in the Shenzhen CTL Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CTL laboratory is reported:

Test	Measurement Uncertainty	Notes
Conducted Emission 0.15-30MHz	±3.20 dB	(1)
Radiated Emission 0.009~30MHz	±3.66dB	(1)
Radiated Emission 30~1000MHz	±4.08dB	(1)
Radiated Emission Above 1GHz	±4.32dB	(1)
20dB Emission Bandwidth	±1.9%	(1)
Carrier Frequency Separation	±1.9%	(1)

Maximum Power Spectral Density Level	$\pm 0.98$ dB	(1)
Number of Hopping Channel	$\pm 1.9\%$	(1)
Time of Occupancy	$\pm 0.11\%$	(1)
Max Peak Conducted Output Power	$\pm 0.98$ dB	(1)
Band-edge Spurious Emission	$\pm 1.21$ dB	(1)
Conducted RF Spurious Emission	9kHz-7GHz: $\pm 1.09$ dB 7GHz-26.5GHz: $\pm 3.27$ dB	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=1.96$ .

## 2. GENERAL INFORMATION

### 2.1. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Normal Temperature:	25°C
Relative Humidity:	55 %
Air Pressure:	101 kPa

### 2.2. General Description of EUT

Product Name:	Wireless Party Speaker
Model/Type reference:	100094812
EUT Rated Voltage:	DC 7.4V from battery or AC 120V/60Hz
Test Voltage:	DC 7.4V from battery or AC 120V/60Hz
<b>Bluetooth</b>	
Version:	Supported BR/EDR
Modulation:	GFSK, π/4DQPSK, 8DPSK
Operation frequency:	2402MHz~2480MHz
Channel number:	79
Channel separation:	1MHz
Antenna type:	PCB Antenna
Antenna gain:	1.98dBi

Note1: For more details, please refer to the user's manual of the EUT.

Note2: Antenna gain provided by the applicant.

## 2.3. Description of Test Modes and Test Frequency

The Applicant provides communication tools software to control the EUT for staying in continuous transmitting and receiving mode for testing. There are 79 channels provided to the EUT and Channel 00/39/78 were selected to test.

### Operation Frequency :

Channel	Frequency (MHz)
<b>00</b>	<b>2402</b>
01	2403
:	:
38	2440
<b>39</b>	<b>2441</b>
40	2442
:	:
77	2479
<b>78</b>	<b>2480</b>

Preliminary tests were performed in each mode and packet length of BT, and found worst case as bellow, finally test were conducted at those mode and recorded in this report.

Test Items	Worst case
Conducted Emissions	DH5 Low channel
Radiated Emissions and Band Edge	DH5 Low channel

Software Version: BT FCC Tool V2.24	
Test Mode	Power level
BT BR	4
BT EDR	4

## 2.4. Equipments Used during the Test

Conducted Emission					
Test Equipment	Manufacturer	Model No.	Serial No.	Last calibration	Calibration Due
EMI Test Receiver	ROHDE & SCHWARZ	ESCI	1166.5950.03	2025/04/29	2026/04/28
LISN	ROHDE & SCHWARZ	ESH2-Z5	860014/010	2025/04/29	2026/04/28
Limitator	ROHDE & SCHWARZ	ESH3-Z2	100408	2025/04/29	2026/04/28

Software:					
Name of Software:		Version:			
ES-K1		V1.71			

Radiated Emission					
Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal.Due
Active Loop Antenna	Da Ze	ZN30900A	/	2024/04/30	2027/04/29
Double cone logarithmic antenna	Schwarzbeck	VULB 9168	824	2023/02/13	2026/02/12
Horn Antenna	Sunol Sciences Corp.	DRH-118	A062013	2024/11/25	2027/11/24
Horn Antenna	Ocean Microwave	OBH100400	26999002	2025/02/21	2028/02/20
Amplifier	MRT-AP01M06	MRT	S-001	2025/04/29	2026/04/28
Amplifier	Brief&Smart	LNA-4018	2104197	2025/04/30	2026/04/29
EMI Test Receiver	ROHDE & SCHWARZ	ESCI	1166.5950.03	2025/04/29	2026/04/28
Spectrum Analyzer	RS	FSP	1164.4391.38	2025/04/29	2026/04/28

Software:					
Name of Software:		Version:			
EZ EMC(Below 1GHz)		V1.1.4.2			
EZ EMC(Above 1GHz)		V1.1.4.2			

## 2.5. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended to comply with Section 15.247 of the 47 CFR Part 15, Subpart C Rules.

## 2.6. Modifications

No modifications were implemented to meet testing criteria.

### 3. TEST CONDITIONS AND RESULTS

#### 3.1. Conducted Emissions Test


##### LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.207

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50


\* Decreases with the logarithm of the frequency.

##### TEST CONFIGURATION

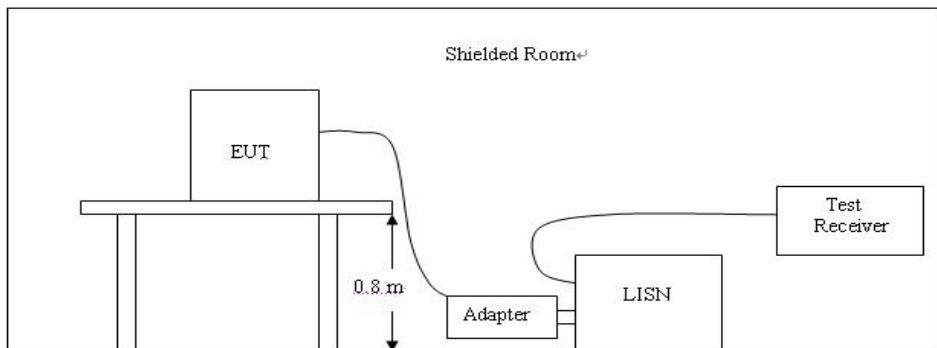

##### TEST PROCEDURE

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system; a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10:2013.
2. Support equipment, if needed, was placed as per ANSI C63.10:2013.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10:2013.
4. The adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.

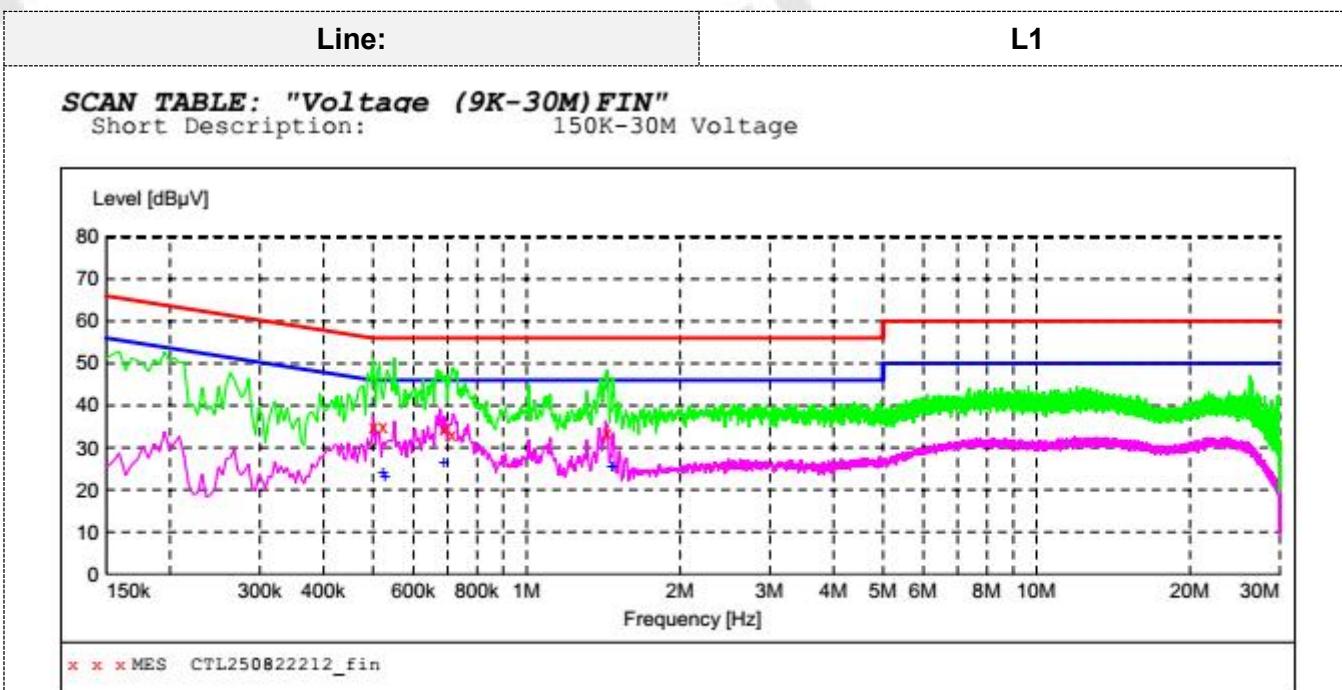**TEST RESULTS****MEASUREMENT RESULT: "CTL250822212\_fin"**

8/22/2025 5:06PM

Frequency MHz	Level dB $\mu$ V	Transd dB	Limit dB $\mu$ V	Margin dB	Detector	Line	PE
0.501000	35.20	10.0	56	20.8	QP	L1	GND
0.523500	34.90	10.0	56	21.1	QP	L1	GND
0.690000	34.40	10.0	56	21.6	QP	L1	GND
0.712500	32.90	10.0	56	23.1	QP	L1	GND
1.441500	33.70	10.1	56	22.3	QP	L1	GND

**MEASUREMENT RESULT: "CTL250822212\_fin2"**


8/22/2025 5:06PM

Frequency MHz	Level dB $\mu$ V	Transd dB	Limit dB $\mu$ V	Margin dB	Detector	Line	PE
0.523500	24.00	10.0	46	22.0	AV	L1	GND
0.528000	23.30	10.0	46	22.7	AV	L1	GND
0.690000	26.50	10.0	46	19.5	AV	L1	GND
1.473000	25.30	10.1	46	20.7	AV	L1	GND
1.477500	25.50	10.1	46	20.5	AV	L1	GND

Line:

N

**SCAN TABLE: "Voltage (9K-30M) FIN"**  
 Short Description: 150K-30M Voltage

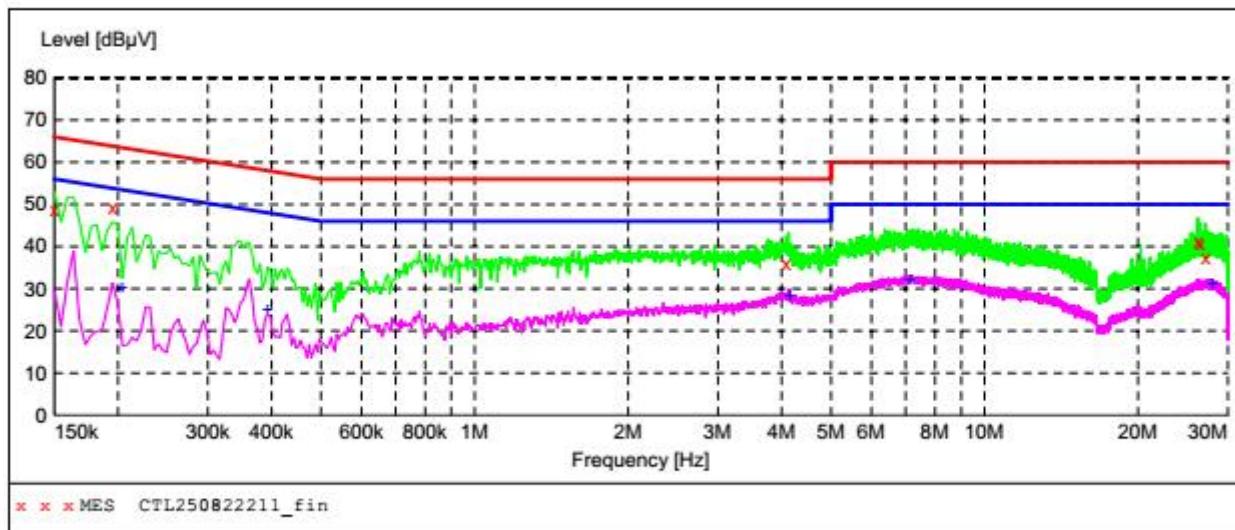

**MEASUREMENT RESULT: "CTL250822211\_fin"**

8/22/2025 5:03PM

Frequency MHz	Level dB $\mu$ V	Transd dB	Limit dB $\mu$ V	Margin dB	Detector	Line	PE
0.150000	48.90	10.0	66	17.1	QP	N	GND
0.195000	49.40	10.0	64	14.4	QP	N	GND
4.083000	35.90	10.1	56	20.1	QP	N	GND
26.227500	41.40	10.5	60	18.6	QP	N	GND
26.520000	40.70	10.4	60	19.3	QP	N	GND
27.123000	37.60	10.4	60	22.4	QP	N	GND

**MEASUREMENT RESULT: "CTL250822211\_fin2"**

8/22/2025 5:03PM

Frequency MHz	Level dB $\mu$ V	Transd dB	Limit dB $\mu$ V	Margin dB	Detector	Line	PE
0.204000	30.10	10.0	53	23.3	AV	N	GND
0.393000	25.00	10.0	48	23.0	AV	N	GND
4.155000	28.50	10.1	46	17.5	AV	N	GND
7.143000	32.00	10.3	50	18.0	AV	N	GND
28.005000	31.10	10.3	50	18.9	AV	N	GND

### 3.2. Radiated Emissions and Band Edge

#### Limit

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission out of authorized band shall not exceed the following table at a 3 meters measurement distance.


In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a)

Radiated emission limits


Frequency (MHz)	Distance (Meters)	Radiated (dB $\mu$ V/m)	Radiated ( $\mu$ V/m)
0.009-0.49	3	$20\log(2400/F(\text{KHz}))+40\log(300/3)$	$2400/F(\text{KHz})$
0.49-1.705	3	$20\log(24000/F(\text{KHz}))+40\log(30/3)$	$24000/F(\text{KHz})$
1.705-30	3	$20\log(30)+40\log(30/3)$	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

#### TEST CONFIGURATION


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

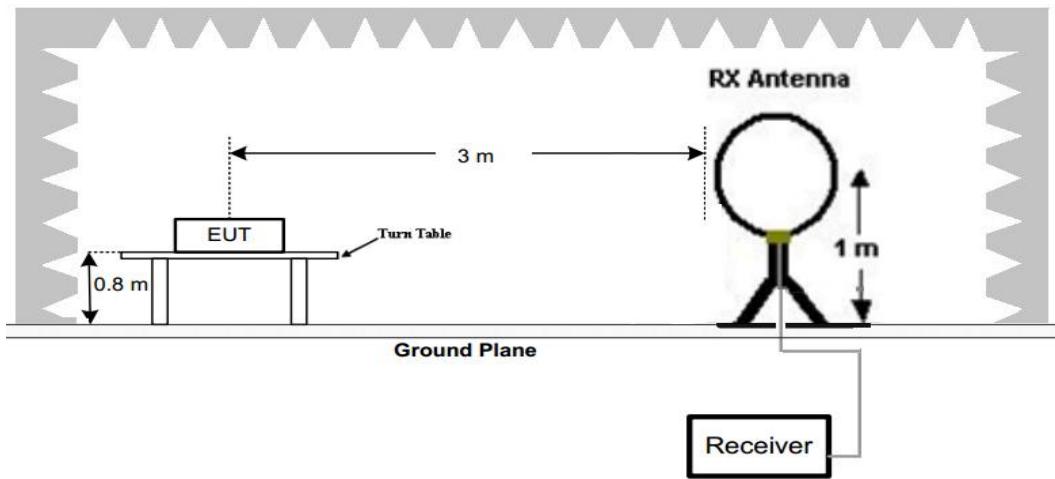

(B) Radiated Emission Test Set-Up, Frequency below 1000MHz

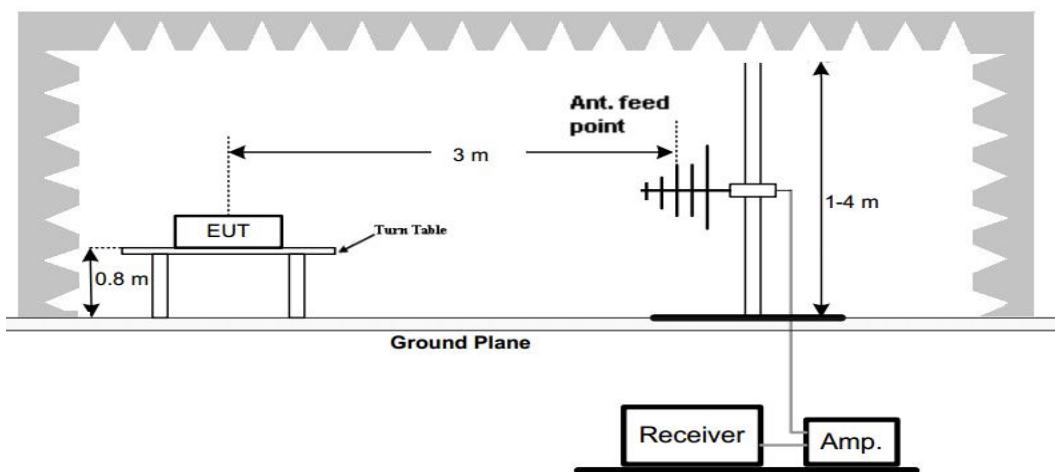

## (C) Radiated Emission Test Set-Up, Frequency above 1000MHz

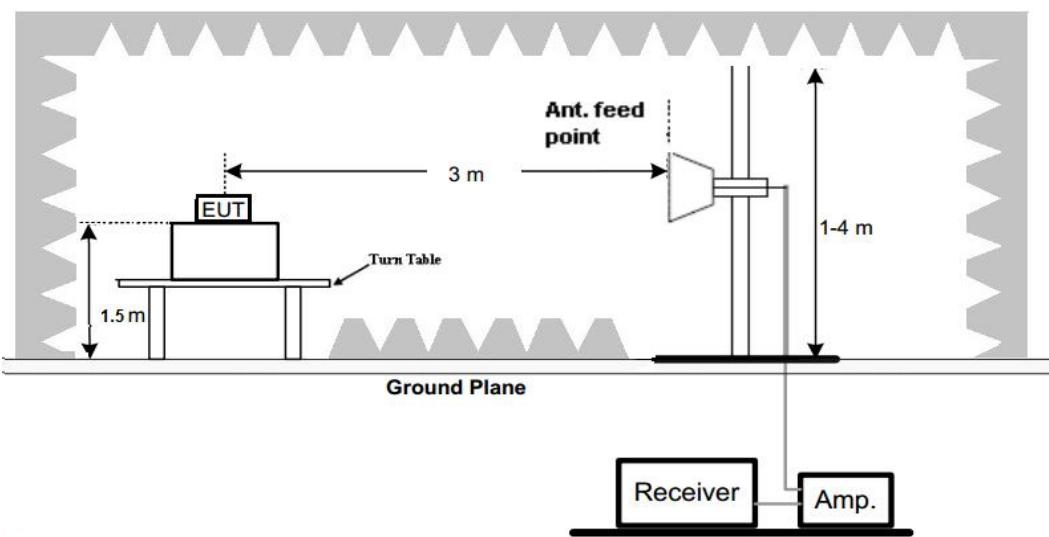**Test Procedure**


1. Below 1GHz measurement the EUT is placed on a turntable which is 0.8m above ground plane, and above 1GHz measurement EUT was placed on a low permittivity and low loss tangent turn table which is 1.5m above ground plane.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0°C to 360°C to acquire the highest emissions from EUT
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.
5. The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement –X, Y, and Z-plane. The X-plane results were found as the worst case and were shown in this report.


**TEST RESULTS**

## Remark:


1. For below 1GHz testing recorded worst at GFSK DH5 low channel.
2. Radiated emission test from 9 KHz to 10th harmonic of fundamental was verified, Found the emission level are attenuated 20dB below the limits from 9 kHz to 30MHz, so it does not recorded in report.

## For 30MHz-1GHz

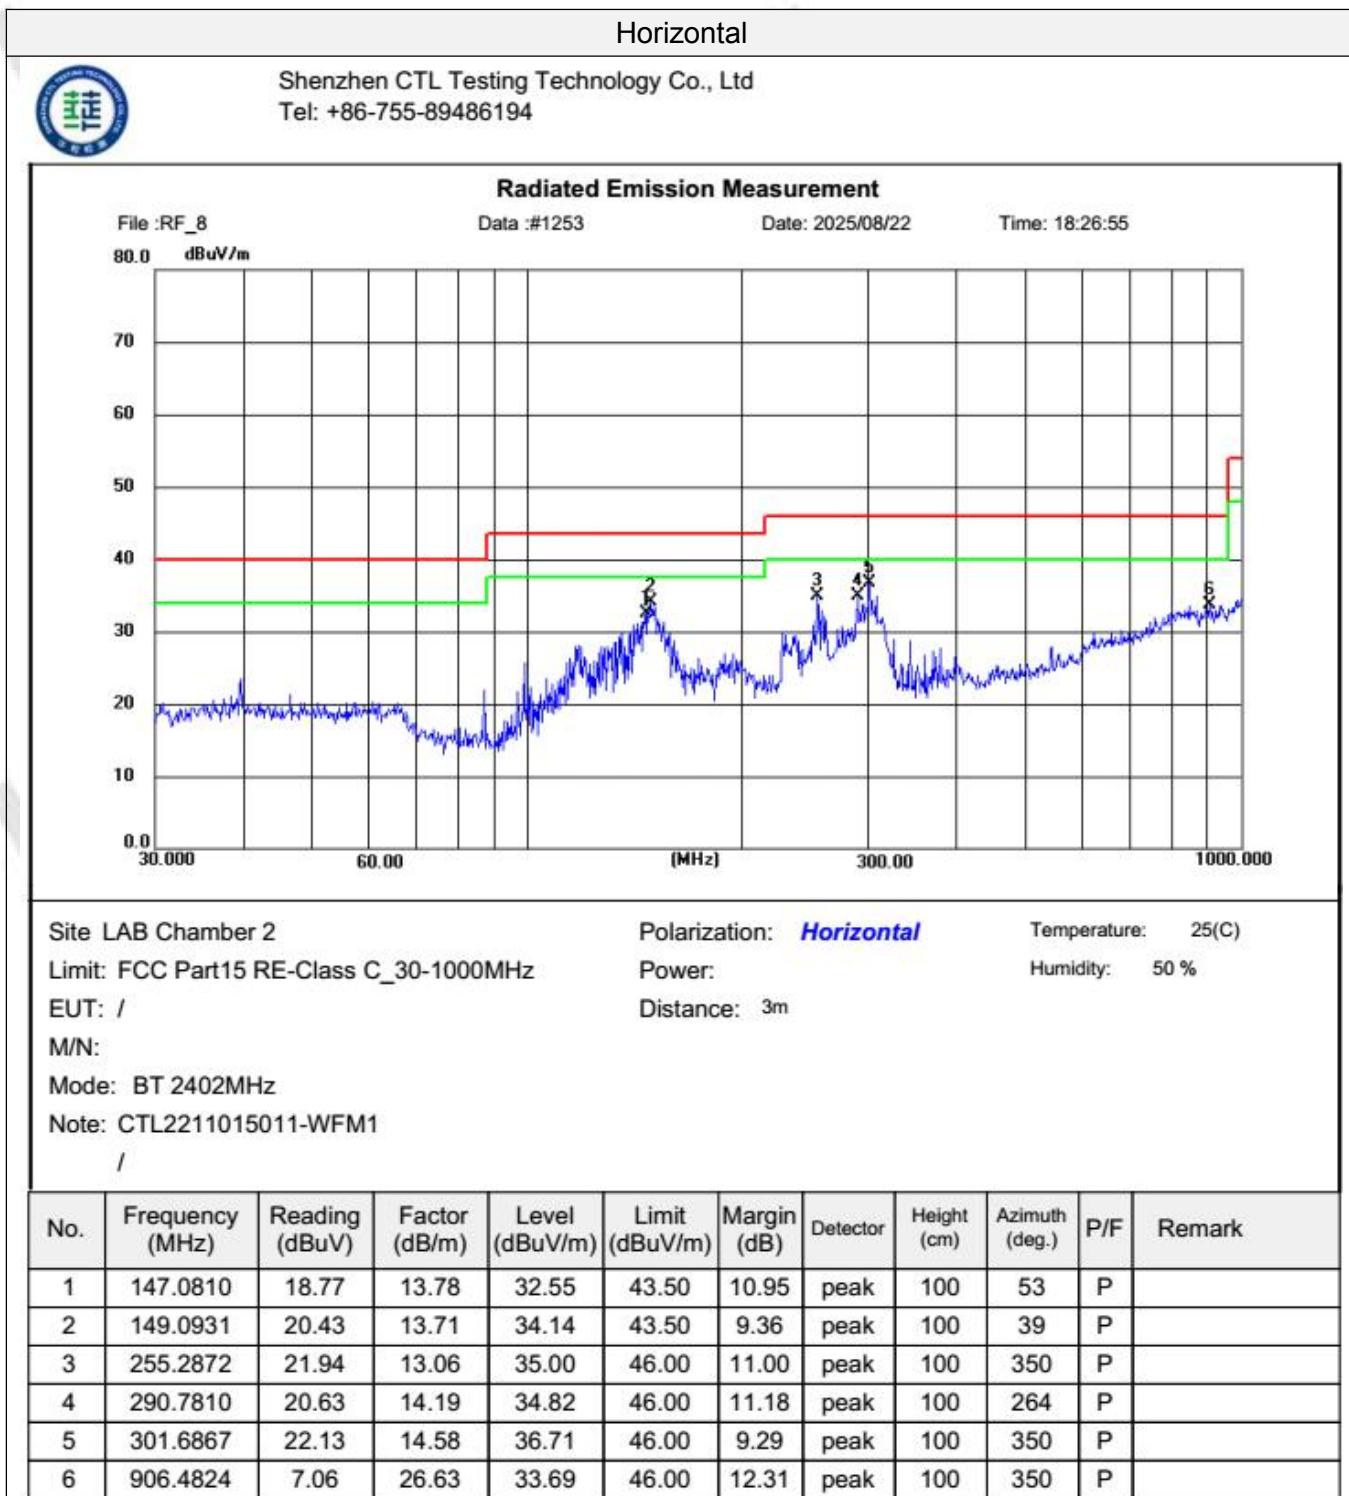

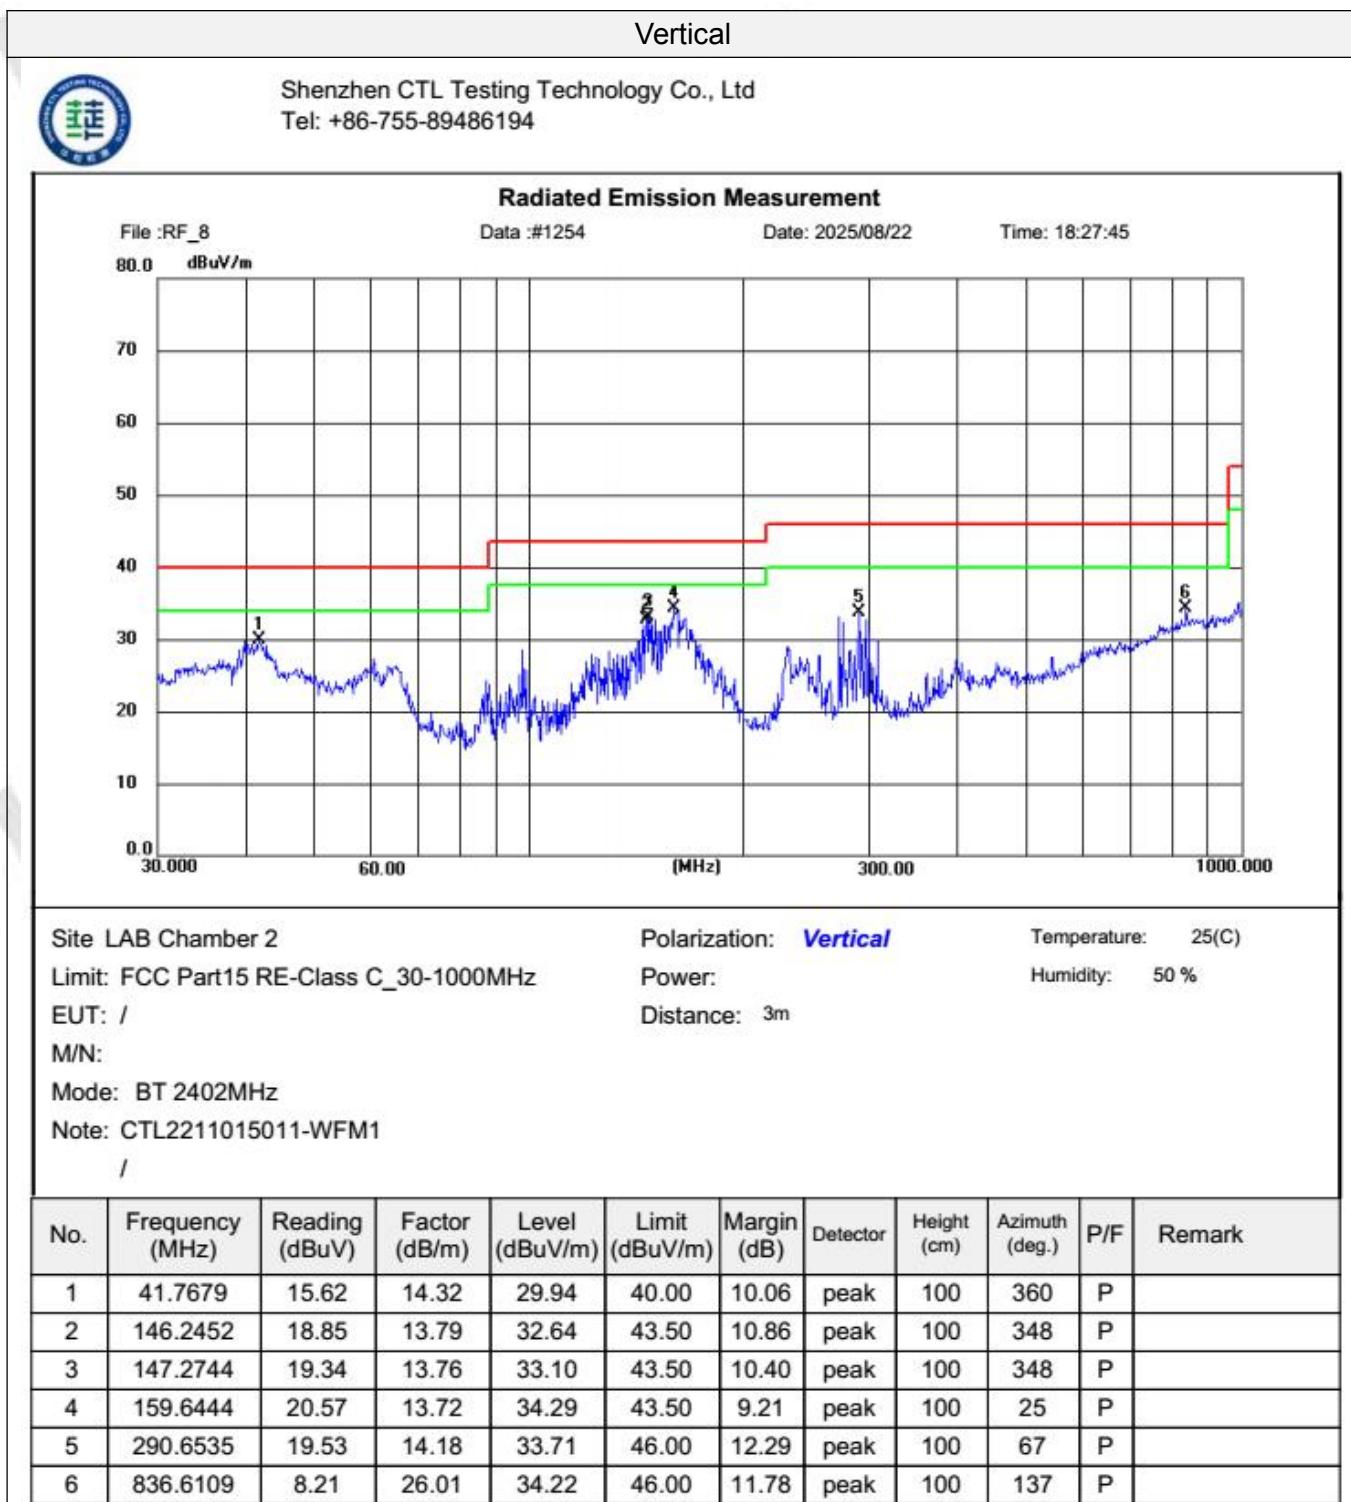

#### 4. Test Setup Photos of the EUT

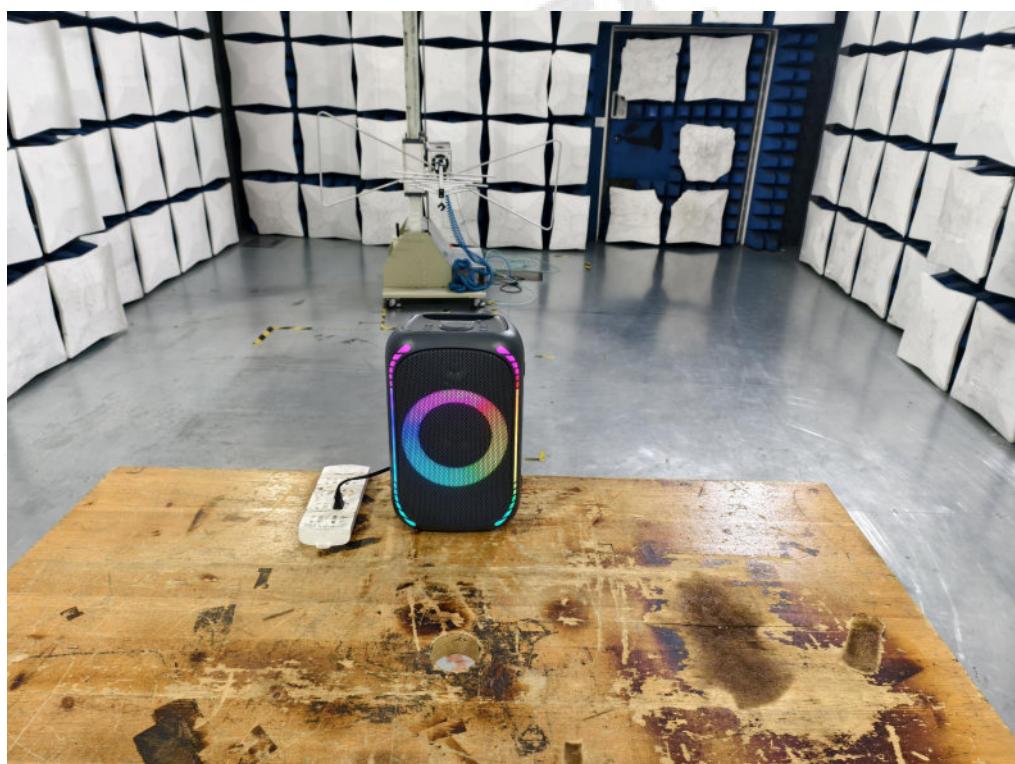

## 5. Photos of the EUT



### External Photos of EUT













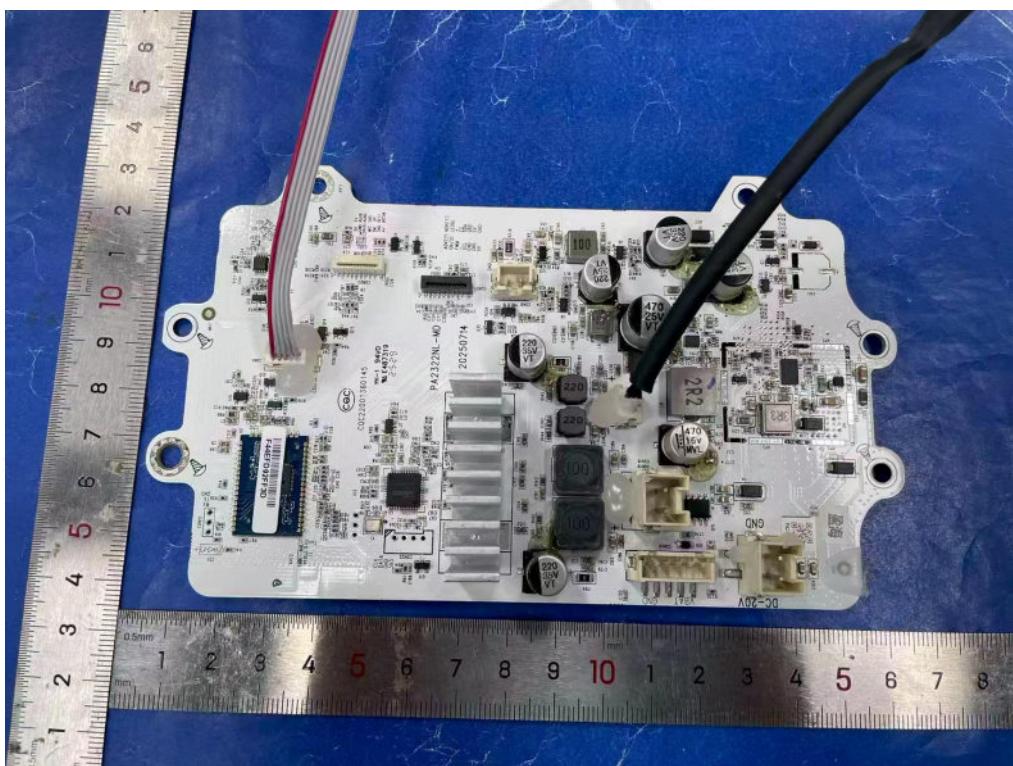
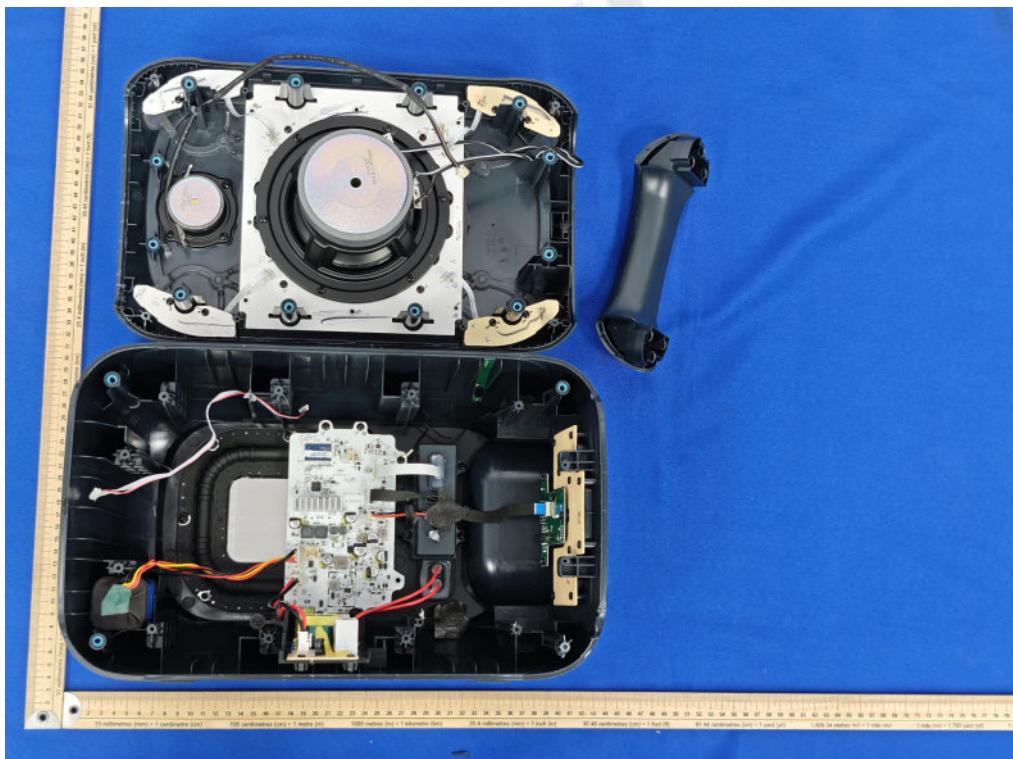




Internal Photos of EUT

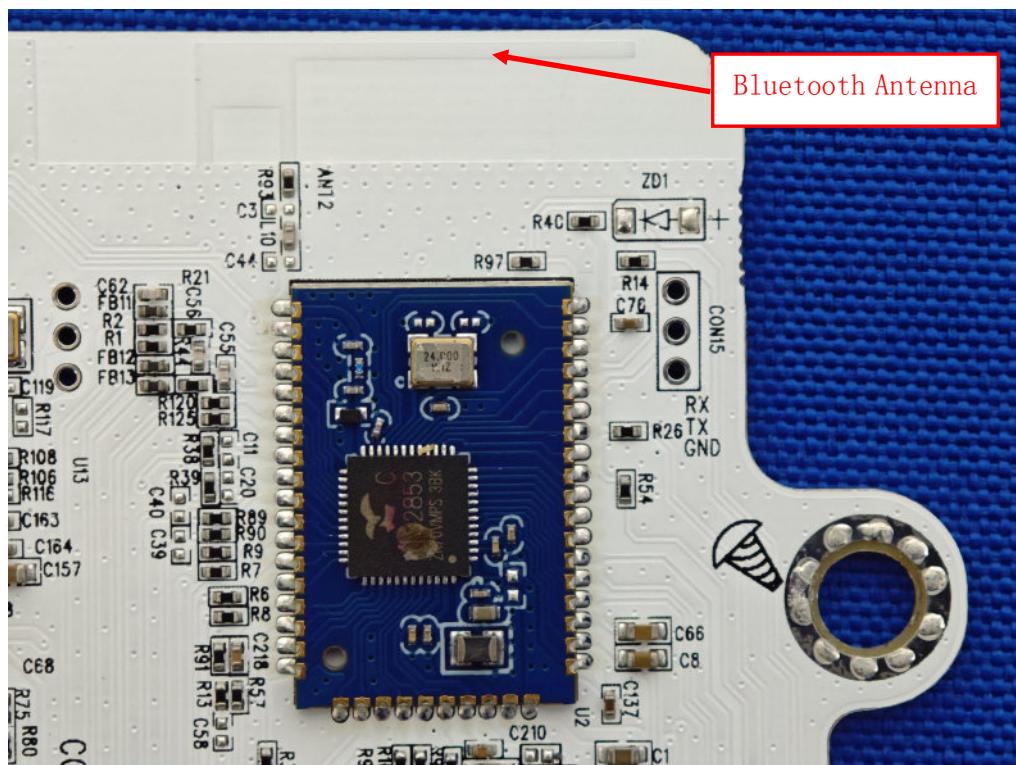
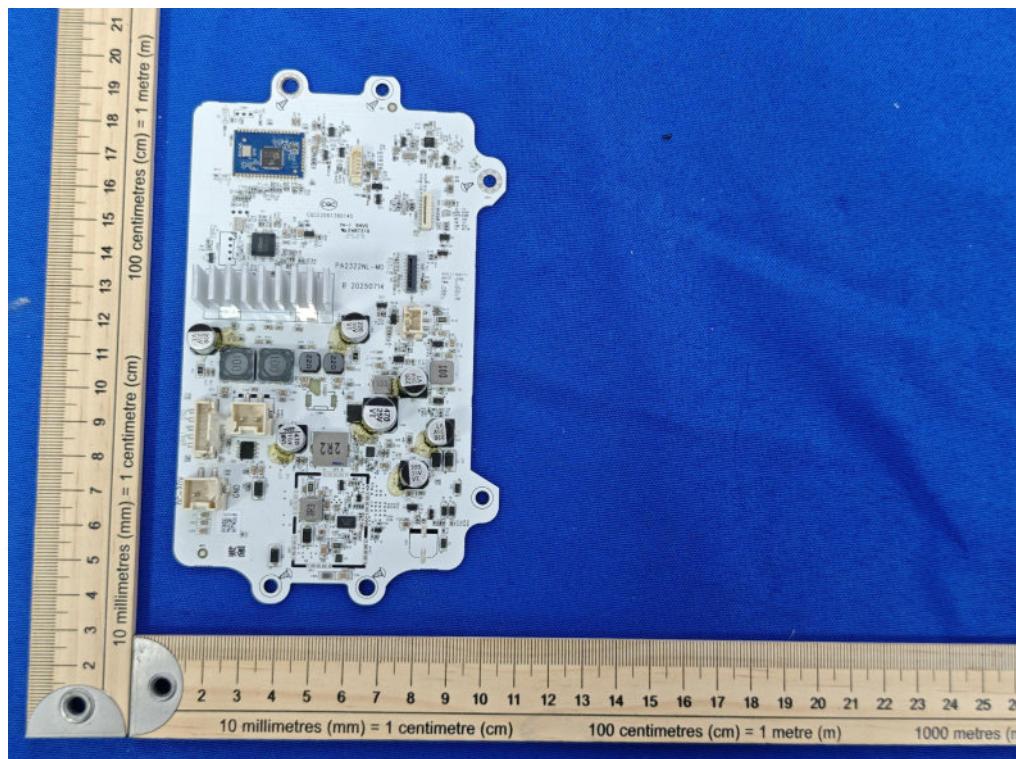


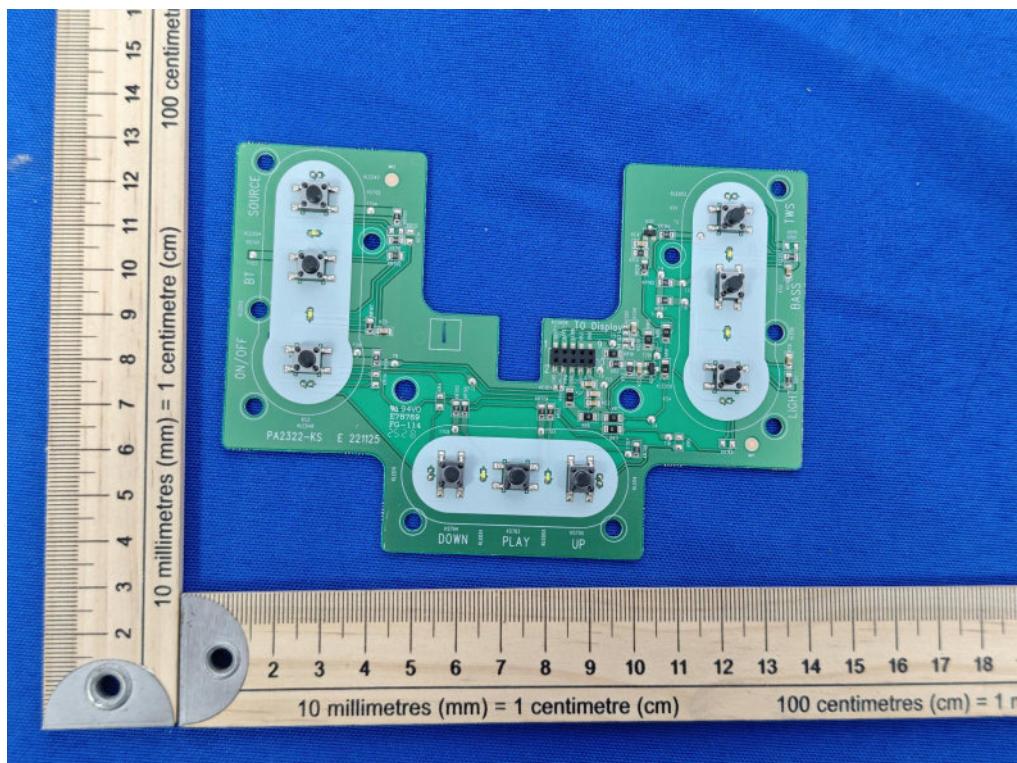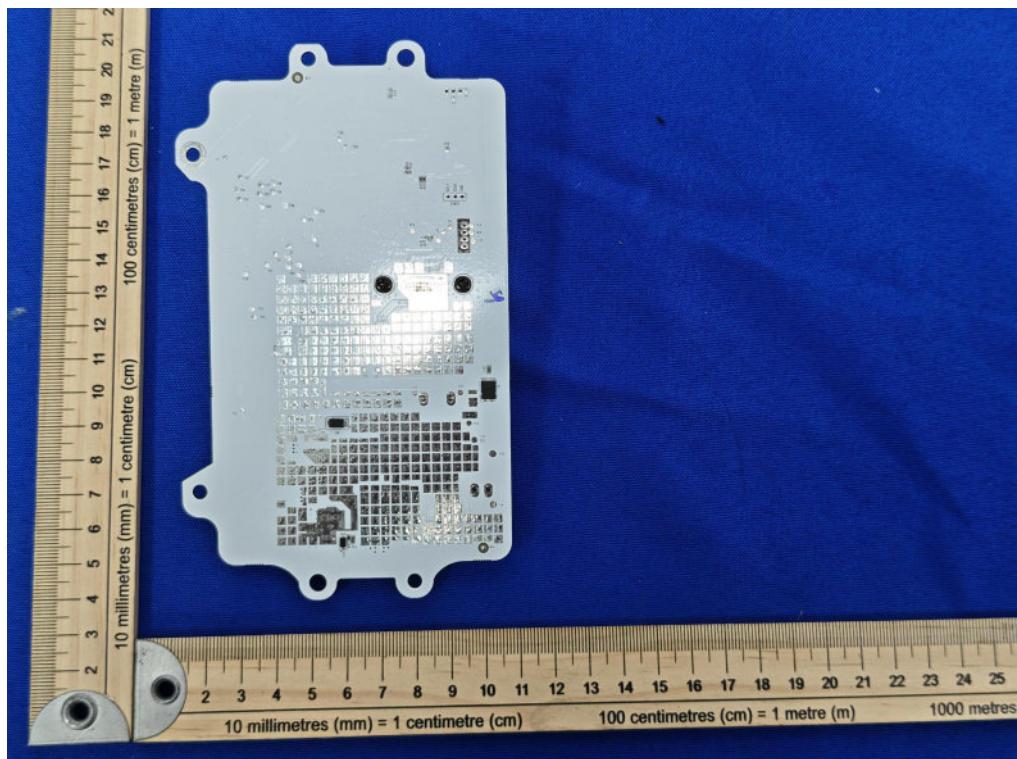


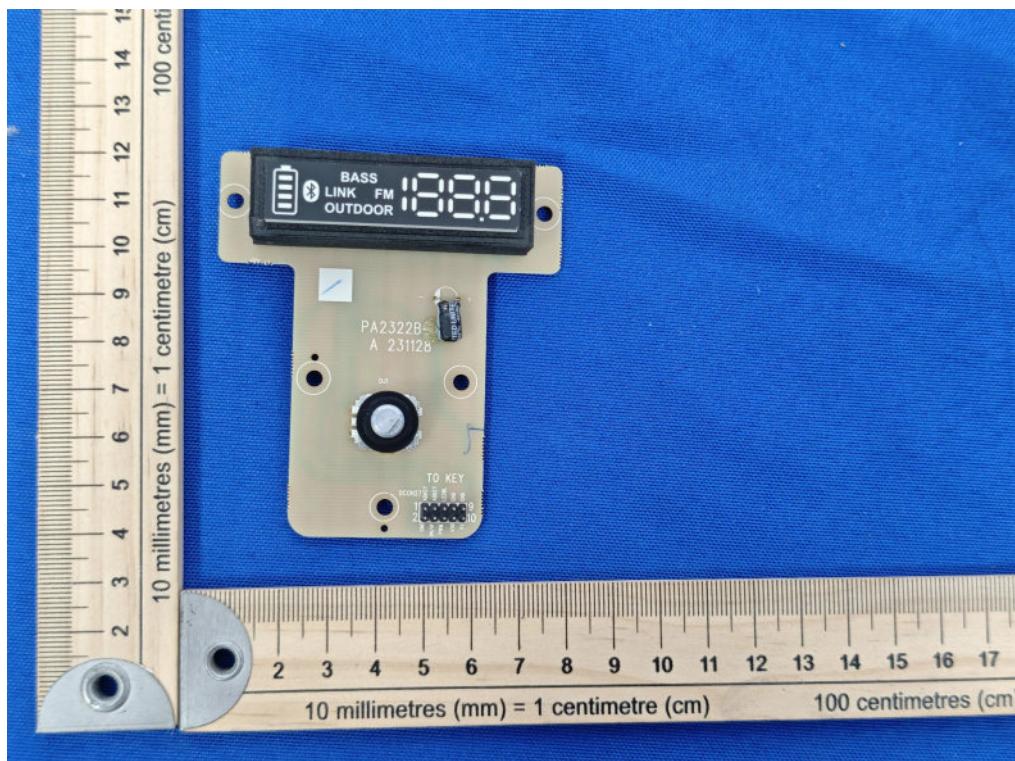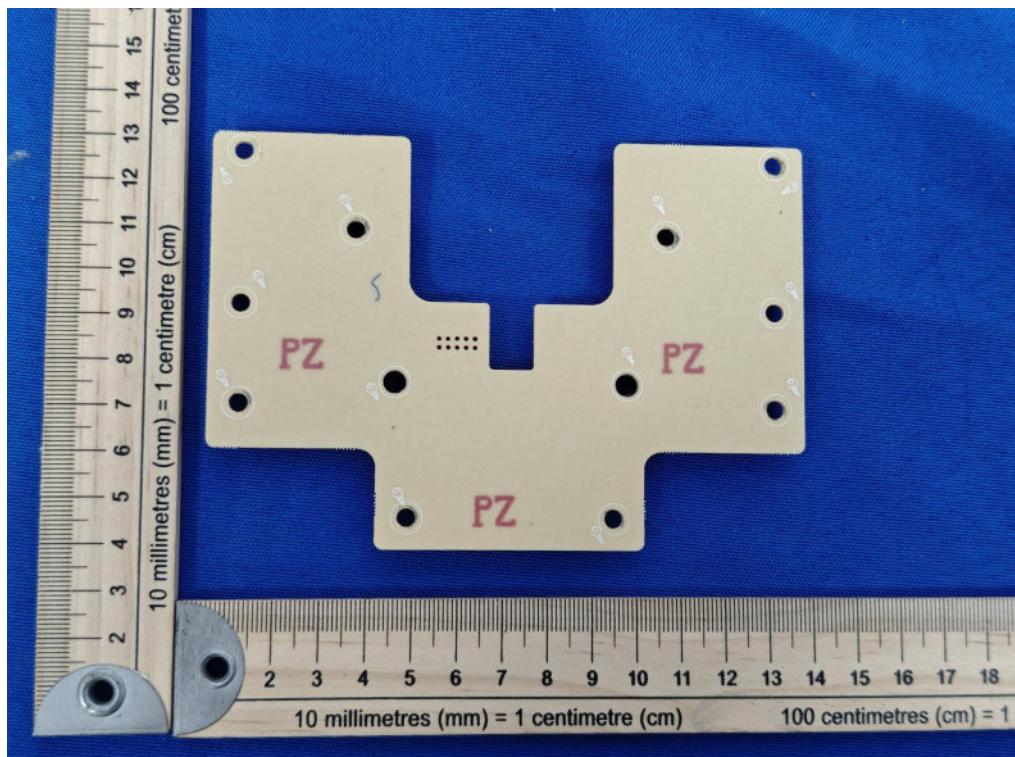

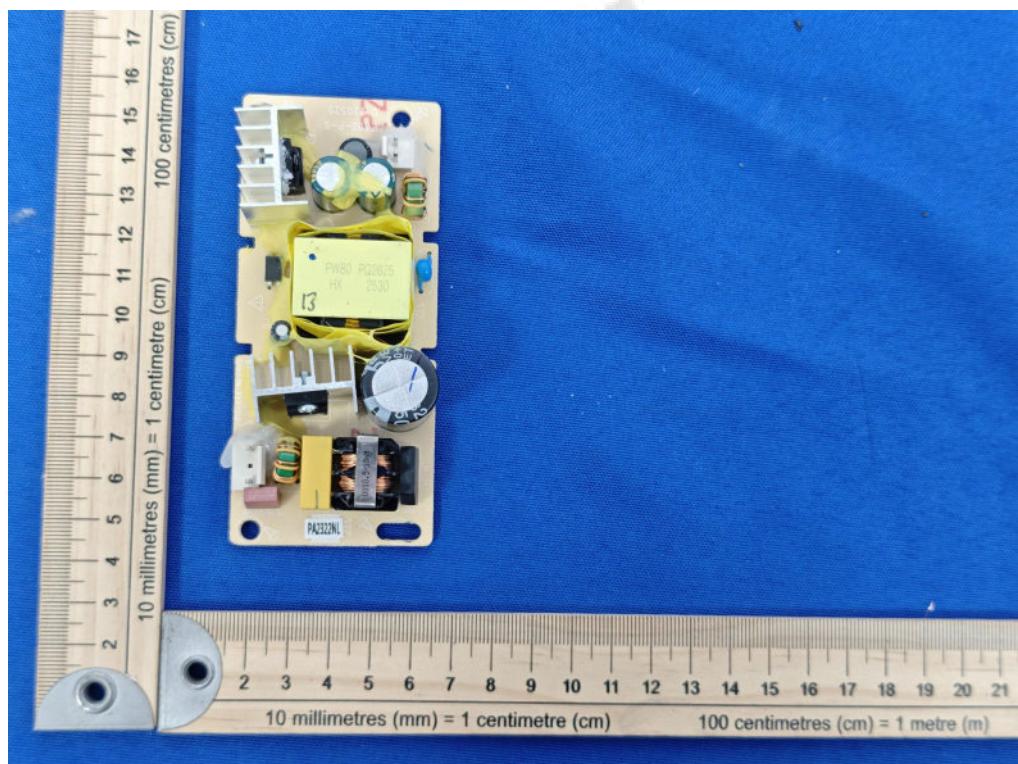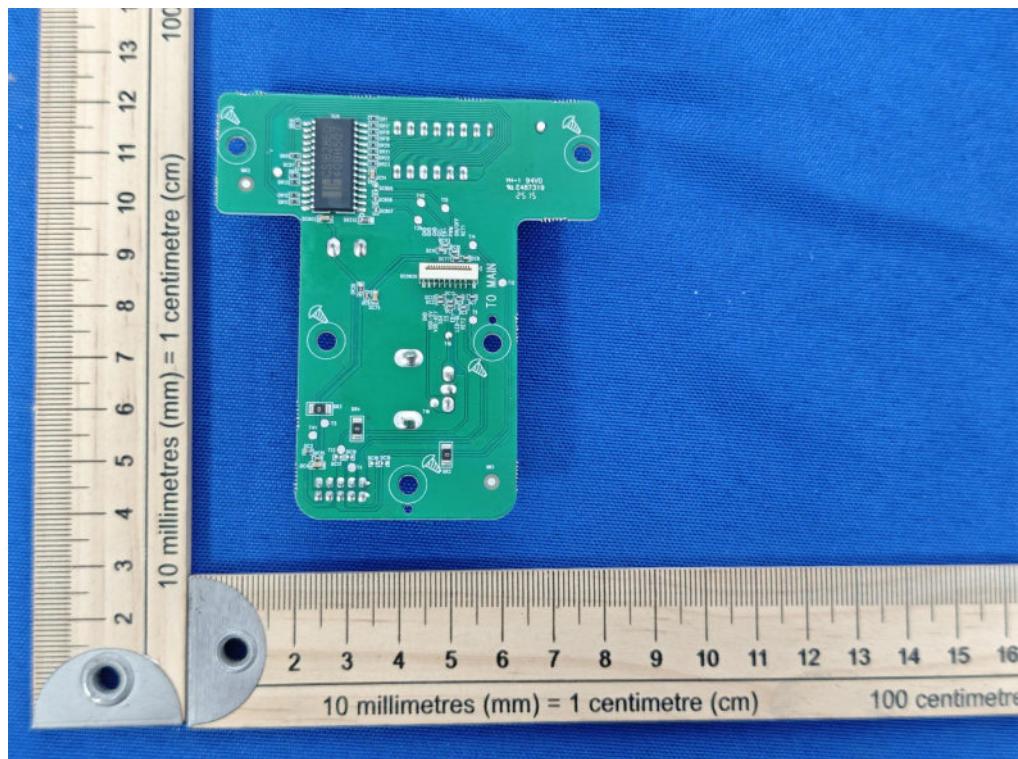

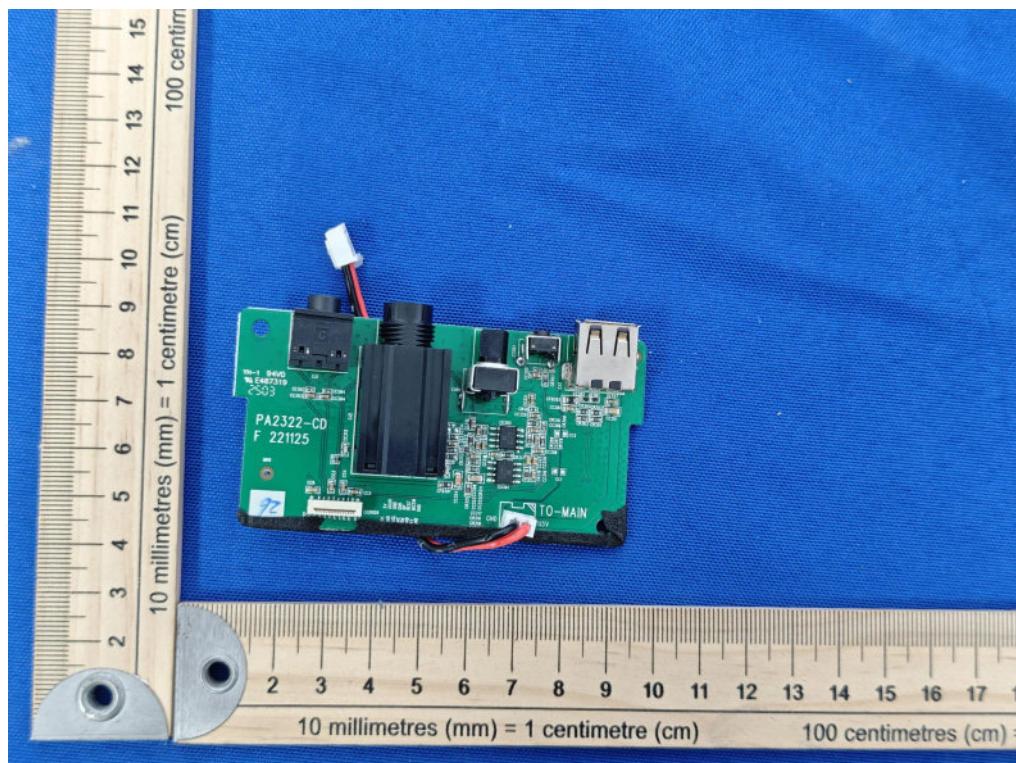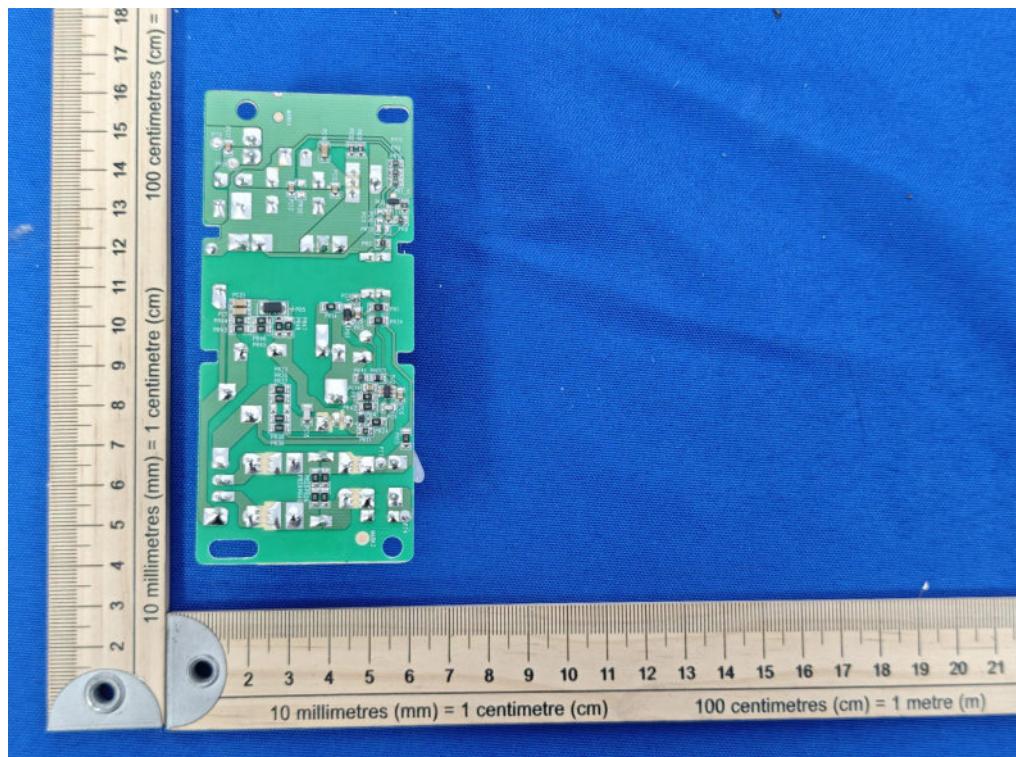

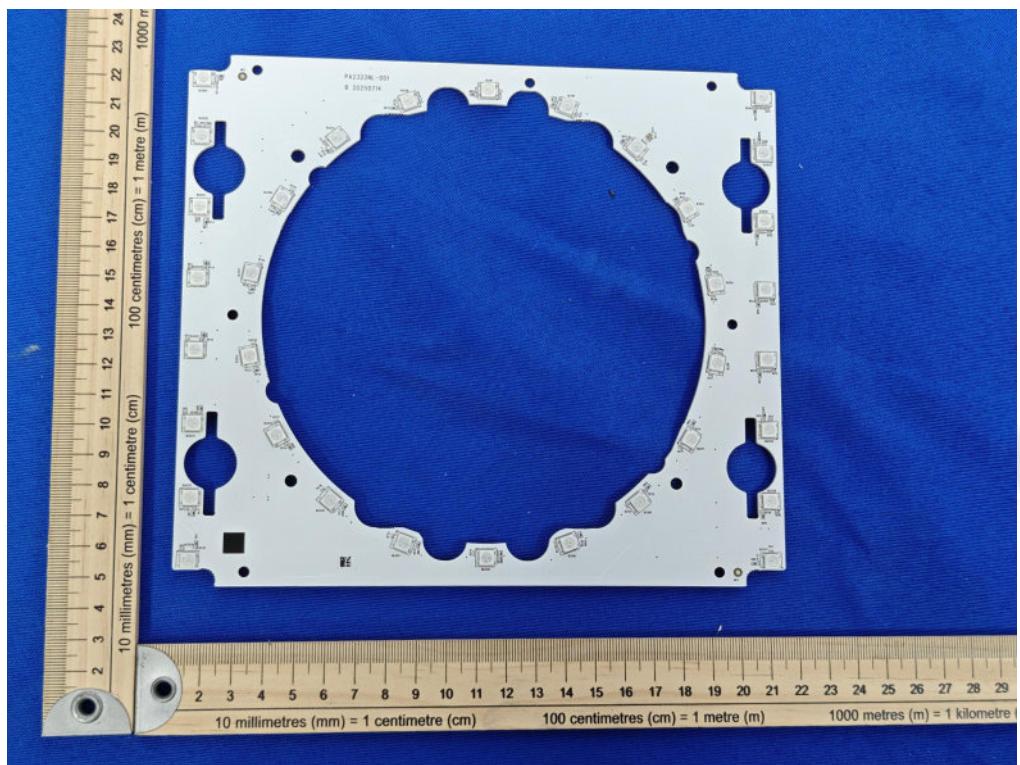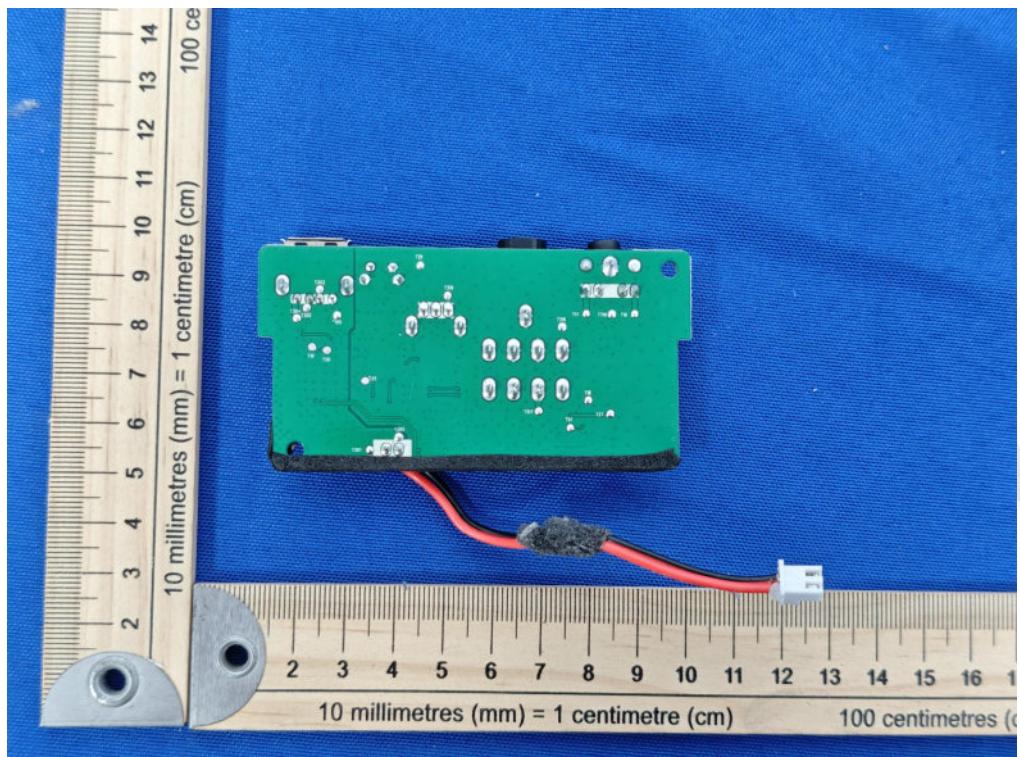

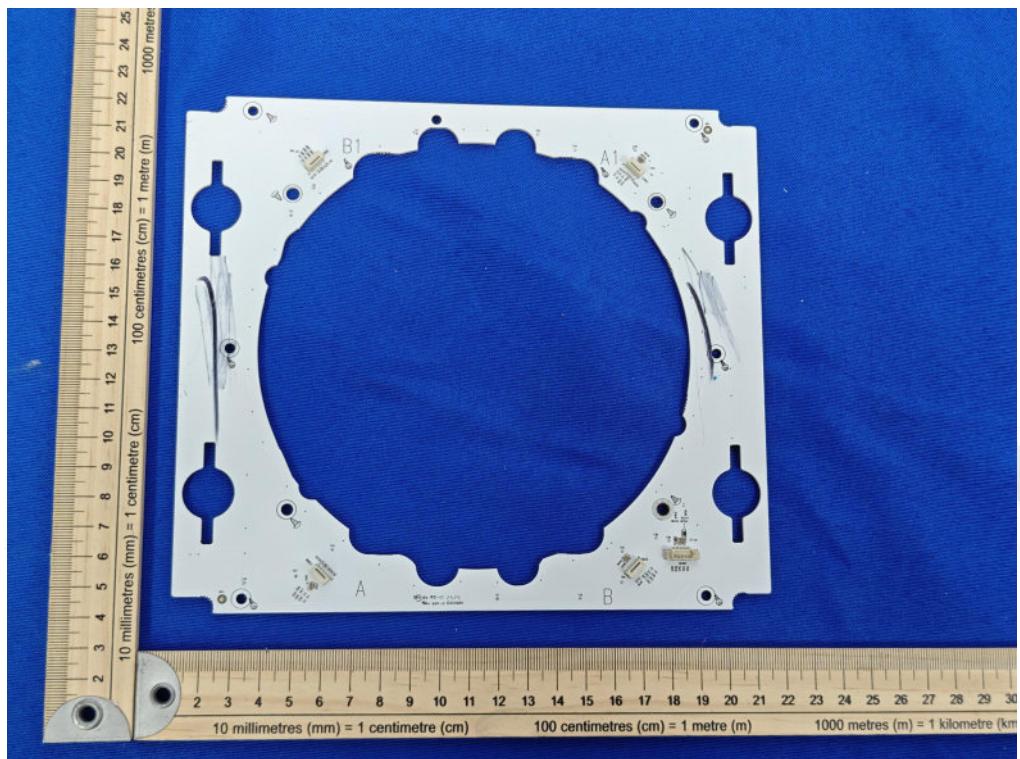



\*\*\*\*\* End of Report \*\*\*\*\*