


## RADIO TEST REPORT

The device described below is tested by Dongguan Nore Testing Center Co., Ltd. to determine the maximum emission levels emanating from the device, the severe levels which the device can endure and E.U.T.'s performance criterion. The test results, data evaluation, test procedures, and equipment of configurations shown in this report were made in accordance with the procedures in ANSI C63.10(2013).

Applicant : SHENZHEN FENDA TECHNOLOGY CO., LTD.  
Address : Fenda Hi-Tech Park, Zhoushi Road, Shiyan Town, Baoan District, Shenzhen City, Guangdong, China  
Manufacturer /Factory : SHENZHEN FENDA TECHNOLOGY CO., LTD.  
Address : Fenda Hi-Tech Park, Zhoushi Road, Shiyan Town, Baoan District, Shenzhen City, Guangdong, China  
E.U.T. : PORTABLE 160-WATT BLUETOOTH PARTY SPEAKER  
Brand Name : **blackweb**<sup>TM</sup>  
Model No. : PA923, BWD19AAS11 (For model difference refer to section 1)  
FCC ID : HBOPA923  
Measurement Standard : FCC PART 15.247  
Date of Receiver : December 12, 2018  
Date of Test : December 13, 2018 to January 07, 2019  
Date of Report : January 08, 2019

This Test Report is Issued Under the Authority of :

Prepared by



Alina Guo / Engineer

Approved & Authorized Signer



Iori Fan / Authorized Signatory

This test report is for the customer shown above and their specific product only. This report applies to above tested sample only and shall not be reproduced in part without written approval of Dongguan Nore Testing Center Co., Ltd.

## Table of Contents

|                                                        |           |
|--------------------------------------------------------|-----------|
| <b>1. GENERAL INFORMATION .....</b>                    | <b>5</b>  |
| 1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST ..... | 5         |
| 1.2 RELATED SUBMITTAL(S) / GRANT (S).....              | 5         |
| 1.3 TEST METHODOLOGY .....                             | 8         |
| 1.4 EQUIPMENT MODIFICATIONS .....                      | 8         |
| 1.5 SUPPORT DEVICE .....                               | 8         |
| 1.6 TEST FACILITY AND LOCATION.....                    | 9         |
| 1.7 SUMMARY OF TEST RESULTS .....                      | 10        |
| <b>2. SYSTEM TEST CONFIGURATION.....</b>               | <b>11</b> |
| 2.1 EUT CONFIGURATION .....                            | 11        |
| 2.2 SPECIAL ACCESSORIES.....                           | 11        |
| 2.3 DESCRIPTION OF TEST MODES .....                    | 11        |
| 2.4 EUT EXERCISE .....                                 | 11        |
| <b>3. CONDUCTED EMISSIONS TEST .....</b>               | <b>12</b> |
| 3.1 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....  | 12        |
| 3.2 TEST CONDITION .....                               | 12        |
| 3.3 MEASUREMENT RESULTS.....                           | 12        |
| <b>4. RADIATED EMISSION TEST .....</b>                 | <b>15</b> |
| 4.1 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....  | 15        |
| 4.2 MEASUREMENT PROCEDURE .....                        | 16        |
| 4.3 LIMIT .....                                        | 16        |
| 4.4 MEASUREMENT RESULTS .....                          | 17        |
| <b>5. CHANNEL SEPARATION TEST.....</b>                 | <b>21</b> |
| 5.1 MEASUREMENT PROCEDURE .....                        | 21        |
| 5.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....  | 21        |
| 5.3 MEASUREMENT RESULTS.....                           | 21        |
| <b>6. 20DB BANDWIDTH.....</b>                          | <b>27</b> |
| 6.1 MEASUREMENT PROCEDURE .....                        | 27        |
| 6.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....  | 27        |
| 6.3 MEASUREMENT RESULTS.....                           | 27        |
| <b>7. HOPPING CHANNEL NUMBER .....</b>                 | <b>33</b> |
| 7.1 MEASUREMENT PROCEDURE .....                        | 33        |
| 7.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....  | 33        |
| 7.3 MEASUREMENT RESULTS.....                           | 33        |

|                                          |           |
|------------------------------------------|-----------|
| <b>8. TIME OF OCCUPANCY (DWELL TIME)</b> | <b>35</b> |
| 8.1 MEASUREMENT PROCEDURE                | 35        |
| 8.2 MEASUREMENT RESULTS                  | 35        |
| <b>9. MAXIMUM PEAK OUTPUT POWER</b>      | <b>35</b> |
| 9.1 MEASUREMENT PROCEDURE                | 41        |
| 9.2 MEASUREMENT RESULTS                  | 41        |
| <b>10. BAND EDGE</b>                     | <b>41</b> |
| 10.1 MEASUREMENT PROCEDURE               | 47        |
| 10.2 LIMIT                               | 47        |
| 10.3 MEASUREMENT RESULTS                 | 47        |
| <b>11. ANTENNA APPLICATION</b>           | <b>47</b> |
| 11.1 ANTENNA REQUIREMENT                 | 54        |
| 11.2 MEASUREMENT RESULTS                 | 54        |
| <b>12. CONDUCTED SPURIOUS EMISSIONS</b>  | <b>55</b> |
| 12.1 MEASUREMENT PROCEDURE               | 55        |
| 12.2. MEASUREMENT RESULTS                | 55        |
| <b>13. TEST EQUIPMENT LIST</b>           | <b>59</b> |

## Revision History of This Test Report

| Report Number  | Description   | Issued Date |
|----------------|---------------|-------------|
| NTC1812150FV00 | Initial Issue | 2019-01-08  |
|                |               |             |
|                |               |             |
|                |               |             |
|                |               |             |
|                |               |             |
|                |               |             |
|                |               |             |
|                |               |             |
|                |               |             |
|                |               |             |
|                |               |             |
|                |               |             |
|                |               |             |
|                |               |             |
|                |               |             |
|                |               |             |
|                |               |             |
|                |               |             |
|                |               |             |

## 1. GENERAL INFORMATION

### 1.1 Product Description for Equipment under Test

|                       |                                                                                                                                                              |
|-----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product Name          | : PORTABLE 160-WATT BLUETOOTH PARTY SPEAKER                                                                                                                  |
| Main Model Name       | : PA923                                                                                                                                                      |
| Additional Model Name | : BWD19AAS11                                                                                                                                                 |
| Model difference      | : Both models have the same circuitry, electrical mechanical, PCB Layout and physical construction. Their difference in model number due to trading purpose. |
| Brand Name            | : <b>blackweb</b> <sup>TM</sup>                                                                                                                              |
| Power Supply          | : AC 120V 60Hz<br>DC 12V From internal battery                                                                                                               |
| Adapter               | : N/A                                                                                                                                                        |
| Test voltage          | : AC 120V/60Hz, DC 12V<br>Only the worst case was recorded in the report.                                                                                    |
| Hardware version      | : PA923-01-A0D                                                                                                                                               |
| Software version      | : V4.2                                                                                                                                                       |
| Serial number         | : N/A                                                                                                                                                        |
| Note                  | : N/A                                                                                                                                                        |

---

### Technical parameters

|                   |                                                                 |
|-------------------|-----------------------------------------------------------------|
| Bluetooth Version | : BT4.2                                                         |
| Frequency Range   | : 2402-2480MHz                                                  |
| Modulation        | : GFSK, $\pi$ 4/-DQPSK, 8DPSK                                   |
| Number of Channel | : 79                                                            |
| Channel space     | : 1MHz                                                          |
| Date Rate         | : 1Mbps for GFSK<br>2Mbps for $\pi$ 4/-DQPSK<br>3Mbps for 8DPSK |
| Antenna Type      | : PCB                                                           |
| Antenna Gain      | : -0.347dBi                                                     |

### BDR+EDR Channel List

| Channel | Frequency MHz | Channel | Frequency MHz | Channel | Frequency MHz | Channel | Frequency MHz |
|---------|---------------|---------|---------------|---------|---------------|---------|---------------|
| 1       | 2402          | 21      | 2422          | 41      | 2442          | 61      | 2462          |
| 2       | 2403          | 22      | 2423          | 42      | 2443          | 62      | 2463          |
| 3       | 2404          | 23      | 2424          | 43      | 2444          | 63      | 2464          |
| 4       | 2405          | 24      | 2425          | 44      | 2445          | 64      | 2465          |
| 5       | 2406          | 25      | 2426          | 45      | 2446          | 65      | 2466          |
| 6       | 2407          | 26      | 2427          | 46      | 2447          | 66      | 2467          |
| 7       | 2408          | 27      | 2428          | 47      | 2448          | 67      | 2468          |
| 8       | 2409          | 28      | 2429          | 48      | 2449          | 68      | 2469          |
| 9       | 2410          | 29      | 2430          | 49      | 2450          | 69      | 2470          |
| 10      | 2411          | 30      | 2431          | 50      | 2451          | 70      | 2471          |
| 11      | 2412          | 31      | 2432          | 51      | 2452          | 71      | 2472          |
| 12      | 2413          | 32      | 2433          | 52      | 2453          | 72      | 2473          |
| 13      | 2414          | 33      | 2434          | 53      | 2454          | 73      | 2474          |
| 14      | 2415          | 34      | 2435          | 54      | 2455          | 74      | 2475          |
| 15      | 2416          | 35      | 2436          | 55      | 2456          | 75      | 2476          |
| 16      | 2417          | 36      | 2437          | 56      | 2457          | 76      | 2477          |
| 17      | 2418          | 37      | 2438          | 57      | 2458          | 77      | 2478          |
| 18      | 2419          | 38      | 2439          | 58      | 2459          | 78      | 2479          |
| 19      | 2420          | 39      | 2440          | 59      | 2460          | 79      | 2480          |
| 20      | 2421          | 40      | 2441          | 60      | 2461          |         |               |

**Note:** According to section 15.31(m), regards to the operating frequency range over 10MHz, the Lowest, middle, and the Highest frequency of channel were selected to perform the test. The selected frequency and test software see below:

| Channel | Frequency MHz |
|---------|---------------|
| 1       | 2402          |
| 40      | 2441          |
| 79      | 2480          |

|                 |               |
|-----------------|---------------|
| Test SW version | ACTSBTAPP.exe |
|-----------------|---------------|

## 1.2 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: **HBOPA923** filing to comply with Section 15.247 of the FCC Part 15 (2017), Subpart C Rule.

## 1.3 Test Methodology

Both AC mains line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.10 (2013). Radiated emission measurement was performed in semi-anechoic chamber and conducted emission measurement was performed in shield room. For radiated emission measurement, preliminary scans were performed in the semi-anechoic chamber only to determine the worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters.

## 1.4 Equipment Modifications

Not available for this EUT intended for grant.

## 1.5 Support Device

|             |                                                                                                              |
|-------------|--------------------------------------------------------------------------------------------------------------|
| Notebook PC | : Manufacturer: IBM Corporation<br>M/N: R50e<br>S/N: L3-HZNGO<br>P/N: 1834KDC                                |
| Adapter     | : Manufacturer: IBM Corporation<br>M/N: 08K8210<br>Input: AC100-240V 50/60Hz 0.5-1.0A<br>Output: DC 16V 4.5A |

## 1.6 Test Facility and Location

### Site Description

|               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| EMC Lab       | : Listed by CNAS, August 13, 2018<br>The certificate is valid until August 13, 2024<br>The Laboratory has been assessed and proved to be in compliance with CNAS/CL01<br>The Certificate Registration Number is L5795.<br><br>Listed by A2LA, November 01, 2017<br>The certificate is valid until December 31, 2019<br>The Laboratory has been assessed and proved to be in compliance with ISO17025<br>The Certificate Registration Number is 4429.01<br><br>Listed by FCC, November 06, 2017<br>The Designation Number is CN1214<br>Test Firm Registration Number: 907417<br><br>Listed by Industry Canada, June 08, 2017<br>The Certificate Registration Number. Is 46405-9743 |
| Name of Firm  | : Dongguan Nore Testing Center Co., Ltd.<br>(Dongguan NTC Co., Ltd.)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Site Location | : Building D, Gaosheng Science and Technology park, Hongtu road, Nancheng district, Dongguan city, Guangdong province, China                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |

## 1.7 Summary of Test Results

| FCC Rules                       | Description Of Test               | Uncertainty                 | Result    |
|---------------------------------|-----------------------------------|-----------------------------|-----------|
| §15.247(a)(1)                   | Channel Separation test           | $\pm 1.42 \times 10^{-4}\%$ | Compliant |
| §15.247(a)(1)                   | 20dB Bandwidth                    | $\pm 1.42 \times 10^{-4}\%$ | Compliant |
| §15.247(a)(1)(iii)              | Hopping Channel Number            | $\pm 1.42 \times 10^{-4}\%$ | Compliant |
| §15.247(a)(1)(iii)              | Time of Occupancy<br>(Dwell Time) | $\pm 5\%$                   | Compliant |
| §15.247(b)                      | Max Peak output Power test        | $\pm 1.06\text{dB}$         | Compliant |
| §15.247(d)                      | Band edge test                    | $\pm 1.70\text{dB}$         | Compliant |
| §15.207 (a)                     | AC Power Conducted<br>Emission    | $\pm 1.06\text{dB}$         | Compliant |
| §15.247(d), §15.209,<br>§15.205 | Radiated Emission                 | $\pm 3.70\text{dB}$         | Compliant |
| §15.203                         | Antenna Requirement               | N/A                         | Compliant |
| §15.247(d)                      | Conducted Spurious<br>Emission    | $\pm 1.70\text{dB}$         | Compliant |

## **2. System Test Configuration**

### **2.1 EUT Configuration**

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

### **2.2 Special Accessories**

Not available for this EUT intended for grant.

### **2.3 Description of test modes**


The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and normal mode is programmed. The Lowest, middle and highest channel were chosen for testing, and all packets DH1, DH3 and DH5 mode in all modulation type GFSK,  $\pi/4$ -DQPSK, 8DPSK were tested.

### **2.4 EUT Exercise**

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements.

### 3. Conducted Emissions Test

#### 3.1 Test SET-UP (Block Diagram of Configuration)

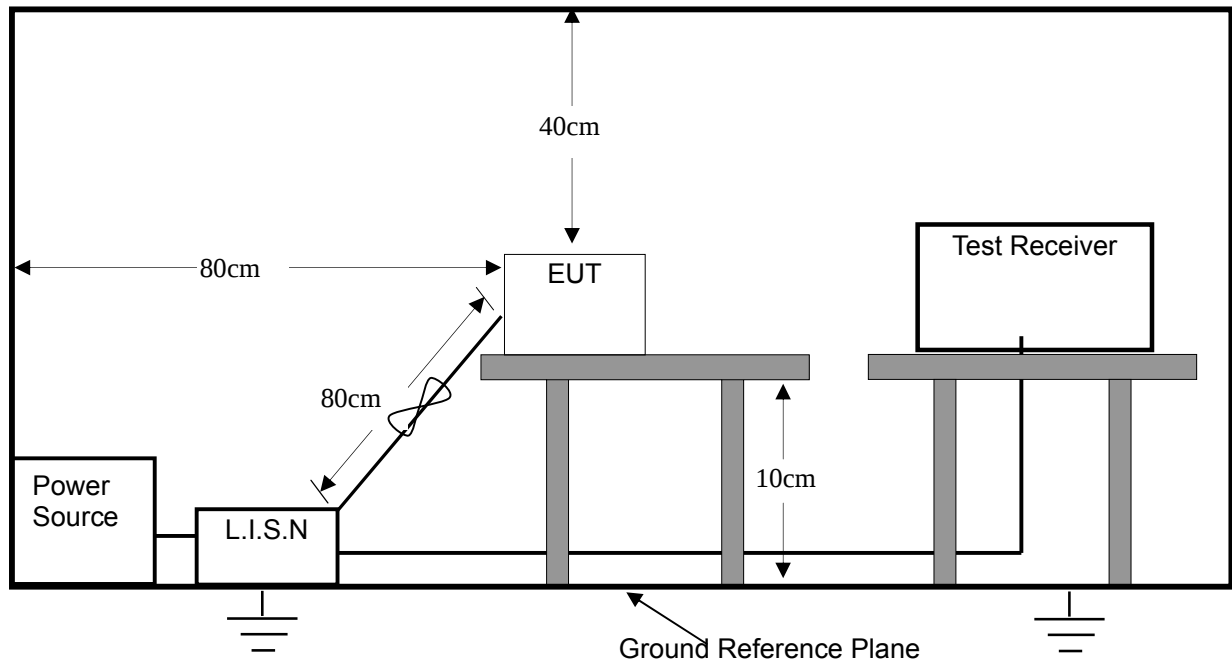

#### 3.2 Test Condition

**Test Requirement: FCC Part 15.207**

**Frequency Range: 150KHz ~ 30MHz**

**Detector: RBW 9KHz, VBW 30KHz**

**Operation Mode: TX**

#### 3.3 Measurement Results

**Please refer to following plots of the worst case: 8DPSK (Low channel)..**



Dongguan NTC Co., Ltd.  
Tel: +86-769-22022444 Fax: +86-769-22022799  
Web: [Http://www.ntc-c.com](http://www.ntc-c.com)

### Conducted Emission Measurement


File : PA923

Data : #8

Date: 2018-12-19

Time: 19:49:40

80.0 dBuV

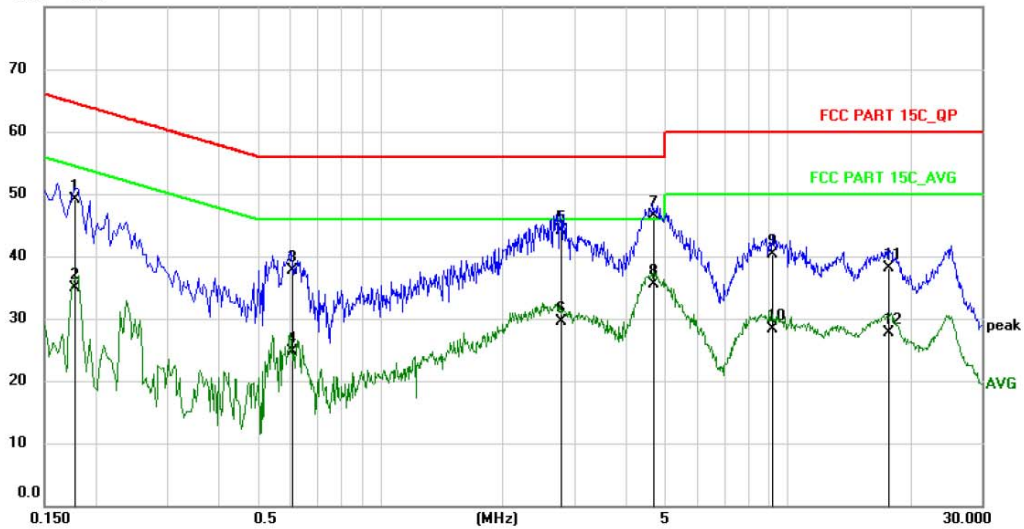

Site

Phase: **L1**

Temperature: 26

Limit: FCC PART 15C\_QP

Power: AC120V/60Hz

Humidity: 50 %

EUT: PORTABLE 160-WATT BLUETOOTH PARTY SPEAKER

M/N: PA923

Mode: BT Link

Note:

| No. Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV | Limit<br>dBuV | Over<br>dB | Detector | Comment |
|---------|--------------|--------------------------|-------------------------|--------------------------|---------------|------------|----------|---------|
| 1       | 0.1780       | 38.49                    | 10.61                   | 49.10                    | 64.58         | -15.48     | QP       |         |
| 2       | 0.1780       | 24.29                    | 10.61                   | 34.90                    | 54.58         | -19.68     | AVG      |         |
| 3       | 0.6059       | 27.17                    | 10.63                   | 37.80                    | 56.00         | -18.20     | QP       |         |
| 4       | 0.6059       | 14.07                    | 10.63                   | 24.70                    | 46.00         | -21.30     | AVG      |         |
| 5       | 2.7700       | 33.45                    | 10.65                   | 44.10                    | 56.00         | -11.90     | QP       |         |
| 6       | 2.7700       | 18.85                    | 10.65                   | 29.50                    | 46.00         | -16.50     | AVG      |         |
| 7 *     | 4.6819       | 35.94                    | 10.66                   | 46.60                    | 56.00         | -9.40      | QP       |         |
| 8       | 4.6819       | 24.84                    | 10.66                   | 35.50                    | 46.00         | -10.50     | AVG      |         |
| 9       | 9.1979       | 29.63                    | 10.67                   | 40.30                    | 60.00         | -19.70     | QP       |         |
| 10      | 9.1979       | 17.73                    | 10.67                   | 28.40                    | 50.00         | -21.60     | AVG      |         |
| 11      | 17.6058      | 27.53                    | 10.67                   | 38.20                    | 60.00         | -21.80     | QP       |         |
| 12      | 17.6058      | 17.13                    | 10.67                   | 27.80                    | 50.00         | -22.20     | AVG      |         |

\*:Maximum data x:Over limit !:over margin

(Reference Only)



Dongguan NTC Co., Ltd.  
Tel:+86-769-22022444 Fax:+86-769-22022799  
Web: [Http://www.ntc-c.com](http://www.ntc-c.com)


### Conducted Emission Measurement

File :PA923

Data :#7

Date: 2018-12-19

Time: 19:42:16

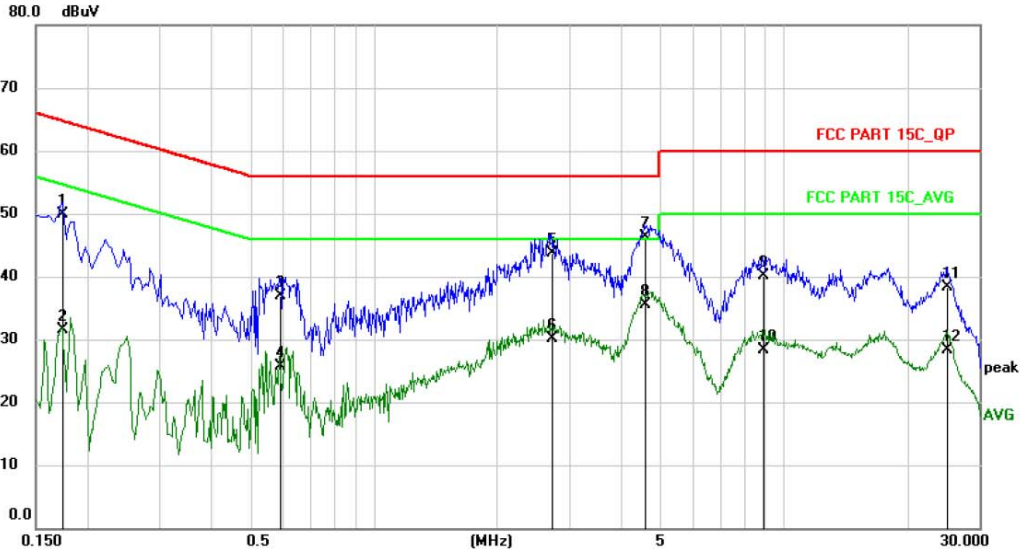

Site

Phase: **N**

Temperature: 26

Limit: FCC PART 15C\_QP

Power: AC120V/60Hz

Humidity: 50 %

EUT: PORTABLE 160-WATT BLUETOOTH PARTY SPEAKER

M/N: PA923

Mode: BT Link

Note:

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV | Limit<br>dBuV | Over<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|------------|----------|---------|
| 1   |     | 0.1740       | 39.39                    | 10.61                   | 50.00                    | 64.77         | -14.77     | QP       |         |
| 2   |     | 0.1740       | 20.89                    | 10.61                   | 31.50                    | 54.77         | -23.27     | AVG      |         |
| 3   |     | 0.5899       | 26.27                    | 10.63                   | 36.90                    | 56.00         | -19.10     | QP       |         |
| 4   |     | 0.5899       | 15.07                    | 10.63                   | 25.70                    | 46.00         | -20.30     | AVG      |         |
| 5   |     | 2.7179       | 33.05                    | 10.65                   | 43.70                    | 56.00         | -12.30     | QP       |         |
| 6   |     | 2.7179       | 19.45                    | 10.65                   | 30.10                    | 46.00         | -15.90     | AVG      |         |
| 7   | *   | 4.5858       | 35.74                    | 10.66                   | 46.40                    | 56.00         | -9.60      | QP       |         |
| 8   |     | 4.5858       | 24.84                    | 10.66                   | 35.50                    | 46.00         | -10.50     | AVG      |         |
| 9   |     | 8.8779       | 29.43                    | 10.67                   | 40.10                    | 60.00         | -19.90     | QP       |         |
| 10  |     | 8.8779       | 17.73                    | 10.67                   | 28.40                    | 50.00         | -21.60     | AVG      |         |
| 11  |     | 25.0138      | 27.72                    | 10.68                   | 38.40                    | 60.00         | -21.60     | QP       |         |
| 12  |     | 25.0138      | 17.62                    | 10.68                   | 28.30                    | 50.00         | -21.70     | AVG      |         |


\*:Maximum data    x:Over limit    !:over margin

(Reference Only)


## 4. Radiated Emission Test

### 4.1 Test SET-UP (Block Diagram of Configuration)

#### 4.1.1 Radiated Emission Test Set-Up, Frequency Below 30MHz

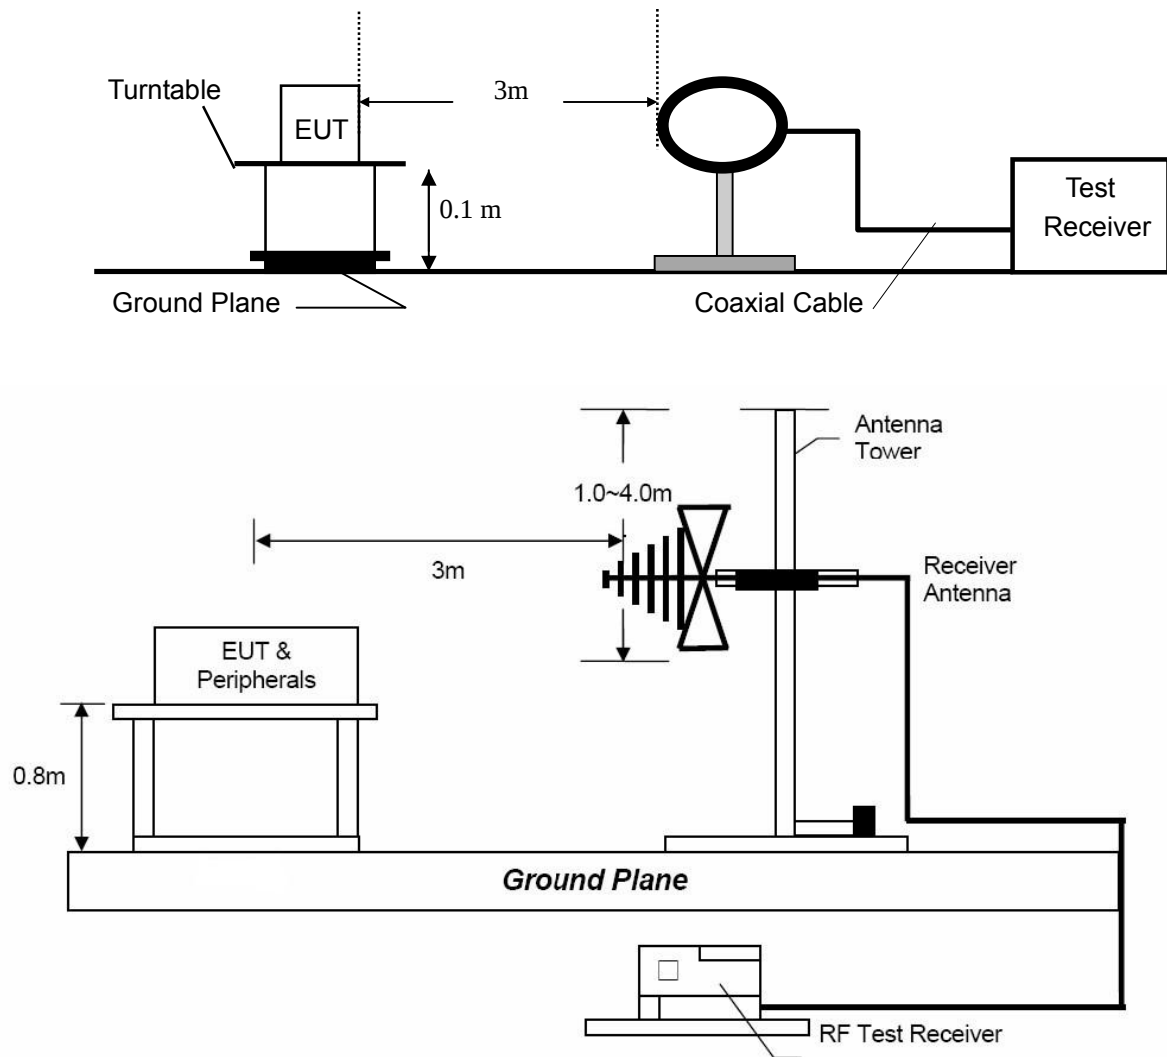

#### 4.1.2 Radiated Emission Test Set-Up, Frequency above 1GHz

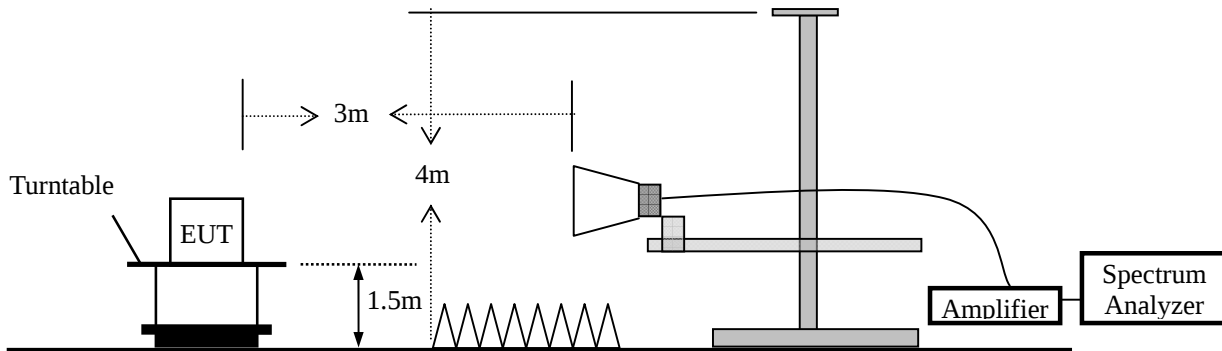

#### 4.2 Measurement Procedure

- Blow 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi- anechoic chamber room.
- For the radiated emission test above 1GHz:  
The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter full anechoic chamber room. The table was rotated 360 degrees to determine the position of the highest radiation. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to peak detect function and specified bandwidth with maximum hold mode.
- A Quasi-peak measurement was then made for that frequency point for below 1GHz test. PK and AV for above 1GHz emission test.

During the radiated emission test, the spectrum analyzer was set with the following configurations:

| Frequency Band (MHz) | Level   | Resolution Bandwidth | Video Bandwidth |
|----------------------|---------|----------------------|-----------------|
| 30 to 1000           | QP      | 120 kHz              | 300 kHz         |
| Above 1000           | Peak    | 1 MHz                | 3 MHz           |
|                      | Average | 1 MHz                | 10 Hz           |

### 4.3 Limit

| Frequency range MHz | Distance Meters | Field Strengths Limit (15.209) |
|---------------------|-----------------|--------------------------------|
|                     |                 | $\mu\text{V/m}$                |
| 0.009 ~ 0.490       | 300             | $2400/F(\text{kHz})$           |
| 0.490 ~ 1.705       | 30              | $24000/F(\text{kHz})$          |
| 1.705 ~ 30          | 30              | 30                             |
| 30 ~ 88             | 3               | 100                            |
| 88 ~ 216            | 3               | 150                            |
| 216 ~ 960           | 3               | 200                            |
| Above 960           | 3               | 500                            |

- Remark: (1) Emission level (dB) $\mu\text{V}$  = 20 log Emission level  $\mu\text{V/m}$   
(2) The smaller limit shall apply at the cross point between two frequency bands.  
(3) As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.  
(4) The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or 40 GHz, whichever is lower.

### 4.4 Measurement Results

Please refer to following plots of the worst case: 8DPSK (Low channel).



Dongguan NTC Co., Ltd.  
Tel: +86-769-22022444 Fax: +86-769-22022799  
Web: [Http://www.ntc-c.com](http://www.ntc-c.com)


### Radiated Emission Measurement

File : PA923

Data : #7

Date: 2018-12-19

Time: 10:40:18

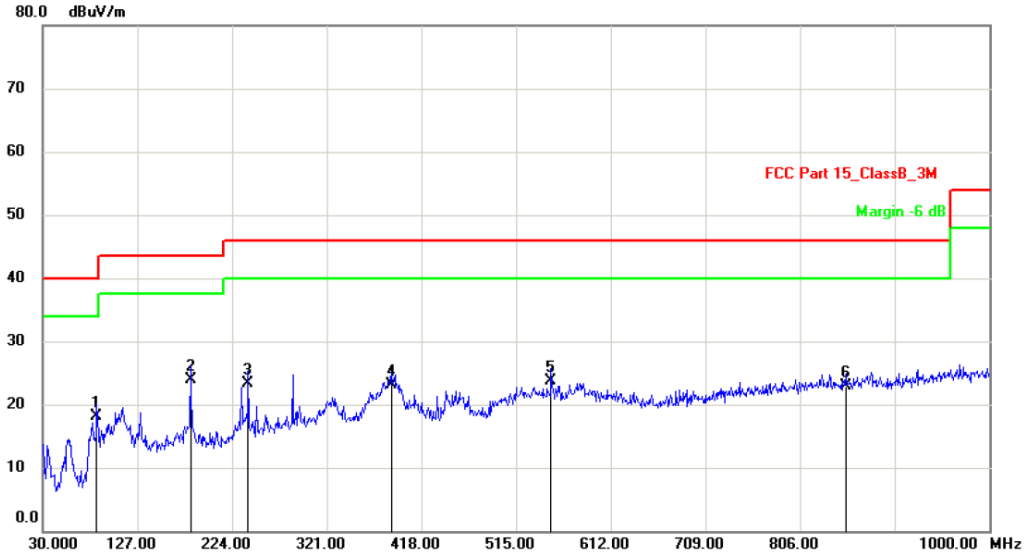

Site: 3m Chamber

Polarization: **Horizontal**

Temperature: 26

Limit: FCC Part 15\_ClassB\_3M

Power: AC120V/60Hz

Humidity: 47 %

EUT:

Distance: 3m

M/N: PA923

Mode: BT Link

Note: EUT:PORTABLE 160-WATT BLUETOOTH PARTY SPEAKER

| No. | Mk. | Freq.    | Reading | Correct | Measure- | Limit  | Over   | Antenna | Table  |         |
|-----|-----|----------|---------|---------|----------|--------|--------|---------|--------|---------|
|     |     | MHz      | Level   | Factor  | ment     |        |        | Height  | Degree |         |
|     |     |          | dBuV    | dB/m    | dBuV/m   | dBuV/m | dB     | cm      | degree | Comment |
| 1   |     | 85.2900  | 33.31   | -15.11  | 18.20    | 40.00  | -21.80 | QP      |        |         |
| 2   | *   | 181.3200 | 38.06   | -14.06  | 24.00    | 43.50  | -19.50 | QP      |        |         |
| 3   |     | 240.4900 | 35.31   | -12.01  | 23.30    | 46.00  | -22.70 | QP      |        |         |
| 4   |     | 386.9600 | 32.27   | -9.17   | 23.10    | 46.00  | -22.90 | QP      |        |         |
| 5   |     | 550.8900 | 30.23   | -6.53   | 23.70    | 46.00  | -22.30 | QP      |        |         |
| 6   |     | 852.5600 | 24.02   | -1.12   | 22.90    | 46.00  | -23.10 | QP      |        |         |

\*:Maximum data x:Over limit !:over margin

(Reference Only)

**Note: Below 30MHz, the emissions are lower than 20dB below the allowable limit.**



Dongguan NTC Co., Ltd.  
Tel: +86-769-22022444 Fax: +86-769-22022799  
Web: [Http://www.ntc-c.com](http://www.ntc-c.com)


### Radiated Emission Measurement

File : PA923

Data : #8

Date: 2018-12-19

Time: 10:47:56

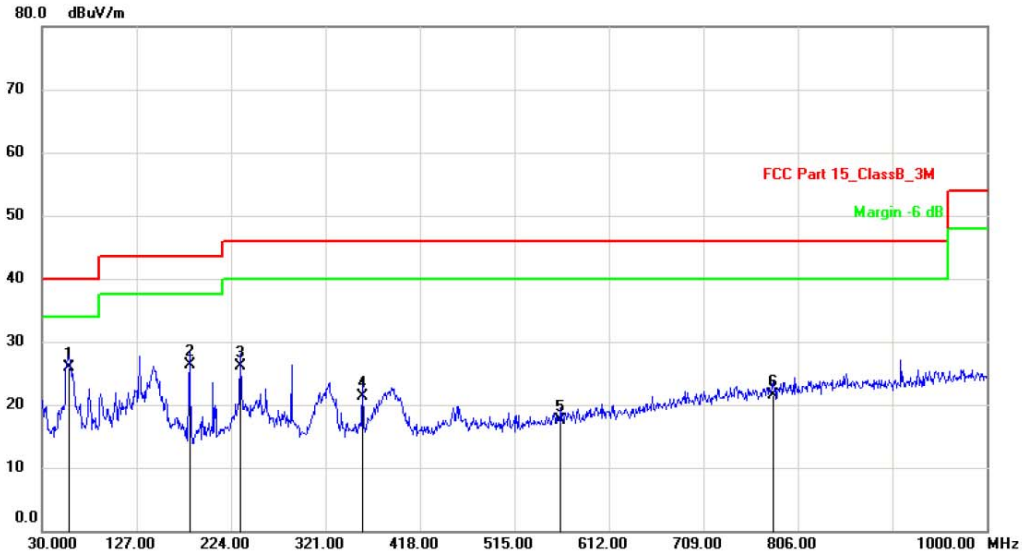

Site: 3m Chamber

Polarization: **Vertical**

Temperature: 26

Limit: FCC Part 15\_ClassB\_3M

Power: AC120V/60Hz

Humidity: 47 %

EUT:

Distance: 3m

M/N: PA923

Mode: BT Link

Note: EUT:PORTABLE 160-WATT BLUETOOTH PARTY SPEAKER

| No. | Mk. | Freq.    | Reading | Correct | Measure- | Limit  | Over   | Antenna | Table  |         |
|-----|-----|----------|---------|---------|----------|--------|--------|---------|--------|---------|
|     |     | MHz      | Level   | Factor  | ment     |        |        | Height  | Degree |         |
|     |     |          | dBuV    | dB/m    | dBuV/m   | dBuV/m | dB     | cm      | degree | Comment |
| 1   | *   | 58.1300  | 40.01   | -14.11  | 25.90    | 40.00  | -14.10 | QP      |        |         |
| 2   |     | 181.3200 | 43.36   | -17.06  | 26.30    | 43.50  | -17.20 | QP      |        |         |
| 3   |     | 233.7000 | 41.40   | -15.30  | 26.10    | 46.00  | -19.90 | QP      |        |         |
| 4   |     | 358.8299 | 32.44   | -11.14  | 21.30    | 46.00  | -24.70 | QP      |        |         |
| 5   |     | 562.5300 | 25.63   | -8.13   | 17.50    | 46.00  | -28.50 | QP      |        |         |
| 6   |     | 780.7800 | 23.79   | -2.19   | 21.60    | 46.00  | -24.40 | QP      |        |         |

\*:Maximum data x:Over limit !:over margin

<Reference Only

**Note: Below 30MHz, the emissions are lower than 20dB below the allowable limit.**

Modulation: 8DPSK (the worst case)  
Frequency Range: 1-25GHz Test Date : January 05, 2019  
Test Result: PASS Temperature : 24 °C  
Measured Distance: 3m Humidity : 47 %  
Test By: Sance

| Freq.<br>(MHz)                 | Ant.Pol.<br>(H/V) | Reading<br>Level(dBuV) |       | Factor<br>(dB/m) | Emission Level<br>(dBuV) |       | Limit 3m<br>(dBuV/m) |       | Margin<br>(dB) |        |
|--------------------------------|-------------------|------------------------|-------|------------------|--------------------------|-------|----------------------|-------|----------------|--------|
|                                |                   | PK                     | AV    |                  | PK                       | AV    | PK                   | AV    | PK             | AV     |
| Operation Mode: TX Mode (Low)  |                   |                        |       |                  |                          |       |                      |       |                |        |
| 4804                           | V                 | 46.48                  | 32.39 | 6.30             | 52.78                    | 38.69 | 74.00                | 54.00 | -21.22         | -15.31 |
| 7206                           | V                 | 45.18                  | 30.71 | 10.44            | 55.62                    | 41.15 | 74.00                | 54.00 | -18.38         | -12.85 |
| ---                            |                   |                        |       |                  |                          |       |                      |       |                |        |
| 4804                           | H                 | 46.13                  | 32.45 | 6.30             | 52.43                    | 38.75 | 74.00                | 54.00 | -21.57         | -15.25 |
| 7206                           | H                 | 44.98                  | 30.85 | 10.44            | 55.42                    | 41.29 | 74.00                | 54.00 | -18.58         | -12.71 |
| ---                            |                   |                        |       |                  |                          |       |                      |       |                |        |
| Operation Mode: TX Mode (Mid)  |                   |                        |       |                  |                          |       |                      |       |                |        |
| 4882                           | V                 | 47.66                  | 32.47 | 6.60             | 54.26                    | 39.07 | 74.00                | 54.00 | -19.74         | -14.93 |
| 7323                           | V                 | 45.35                  | 31.41 | 10.55            | 55.90                    | 41.96 | 74.00                | 54.00 | -18.10         | -12.04 |
| ---                            |                   |                        |       |                  |                          |       |                      |       |                |        |
| 4882                           | H                 | 47.69                  | 32.52 | 6.60             | 54.29                    | 39.12 | 74.00                | 54.00 | -19.71         | -14.88 |
| 7323                           | H                 | 45.79                  | 31.48 | 10.55            | 56.34                    | 42.03 | 74.00                | 54.00 | -17.66         | -11.97 |
| ---                            |                   |                        |       |                  |                          |       |                      |       |                |        |
| Operation Mode: TX Mode (High) |                   |                        |       |                  |                          |       |                      |       |                |        |
| 4960                           | V                 | 45.93                  | 31.90 | 6.89             | 52.82                    | 38.79 | 74.00                | 54.00 | -21.18         | -15.21 |
| 7440                           | V                 | 46.50                  | 31.77 | 10.60            | 57.10                    | 42.37 | 74.00                | 54.00 | -16.90         | -11.63 |
| ---                            |                   |                        |       |                  |                          |       |                      |       |                |        |
| 4960                           | H                 | 44.82                  | 28.63 | 6.89             | 51.71                    | 35.52 | 74.00                | 54.00 | -22.29         | -18.48 |
| 7440                           | H                 | 45.72                  | 31.03 | 10.60            | 56.32                    | 41.63 | 74.00                | 54.00 | -17.68         | -12.37 |
| ---                            |                   |                        |       |                  |                          |       |                      |       |                |        |

- Note:**
- (1) All Readings are Peak Value and AV.
  - (2) Emission Level= Reading Level + Factor
  - (3) Factor= Antenna Gain + Cable Loss – Amplifier Gain
  - (4) Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 10dB below the permissible limits.
  - (5) Measurement uncertainty :  $\pm 3.7\text{dB}$ .
  - (6) Horn antenna used for the emission over 1000MHz.


## 5. Channel Separation test

### 5.1 Measurement Procedure

Minimum Hopping Channel Carrier Frequency Separation, FCC Rule 15.247(a)(1):

Connect EUT antenna terminal to the spectrum analyzer with a low loss cable, and using the MARKER and Max-Hold function to record the separation of two adjacent channels.

### 5.2 Test SET-UP (Block Diagram of Configuration)



### 5.3 Measurement Results


|               |                             |                    |                  |
|---------------|-----------------------------|--------------------|------------------|
| Modulation:   | GFSK, $\pi/4$ -DQPSK, 8DPSK |                    |                  |
| RBW:          | 100KHz                      | VBW:               | 300KHz           |
| Packet:       | DH5                         | Spectrum Detector: | PK               |
| Test By:      | Sance                       | Test Date :        | January 05, 2019 |
| Temperature : | 22 °C                       | Humidity :         | 53 %             |
| Test Result:  | PASS                        |                    |                  |

| Channel number | Channel frequency (MHz) | Separation Read Value (KHz) | Separation Limit 2/3 20dB Bandwidth (KHz) |
|----------------|-------------------------|-----------------------------|-------------------------------------------|
| GFSK           |                         |                             |                                           |
| Lowest         | 2402                    | 999                         | >641.0                                    |
| Middle         | 2441                    | 1008                        | >641.2                                    |
| Highest        | 2480                    | 1005                        | >684.7                                    |
| $\pi/4$ -DQPSK |                         |                             |                                           |
| Lowest         | 2402                    | 996                         | >912.0                                    |
| Middle         | 2441                    | 993                         | >914.0                                    |
| Highest        | 2480                    | 999                         | >914.7                                    |
| 8DPSK          |                         |                             |                                           |
| Lowest         | 2402                    | 1005                        | >899.3                                    |
| Middle         | 2441                    | 1005                        | >901.3                                    |
| Highest        | 2480                    | 999                         | >903.3                                    |

GFSK Lowest Channel




GFSK Middle Channel

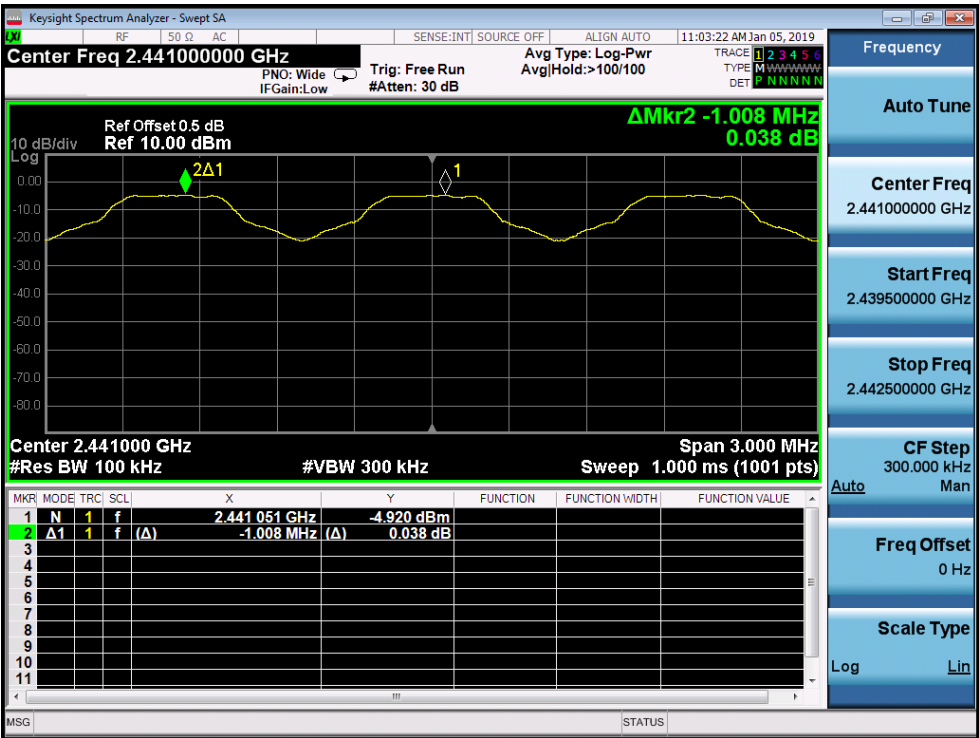




GFSK Highest Channel

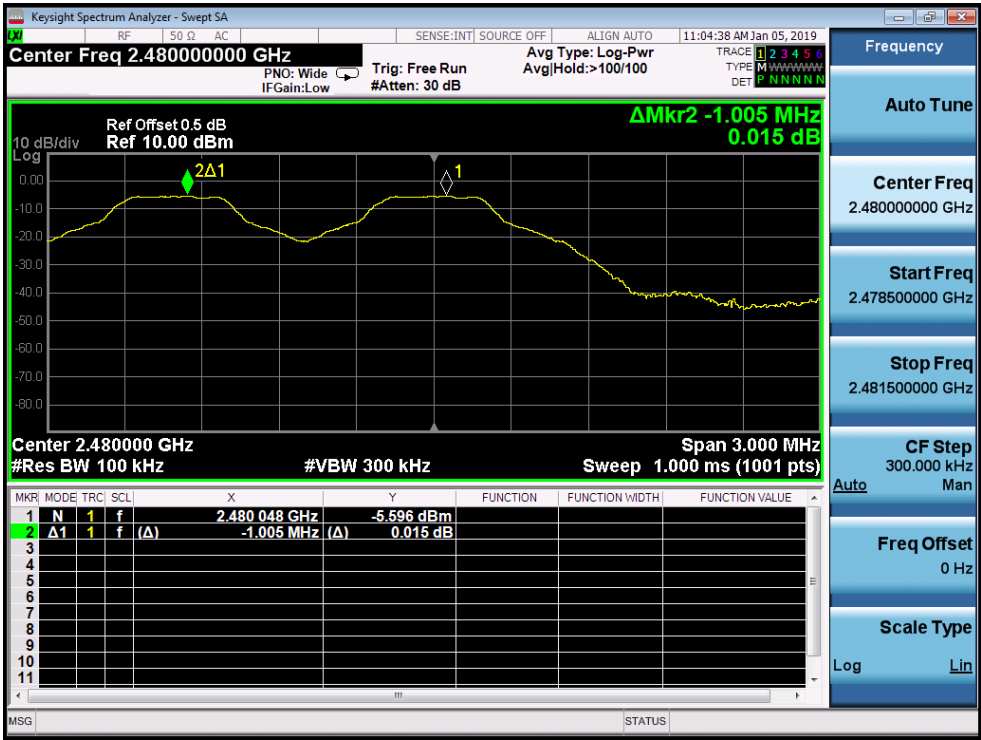


π/4-DQPSK Lowest Channel

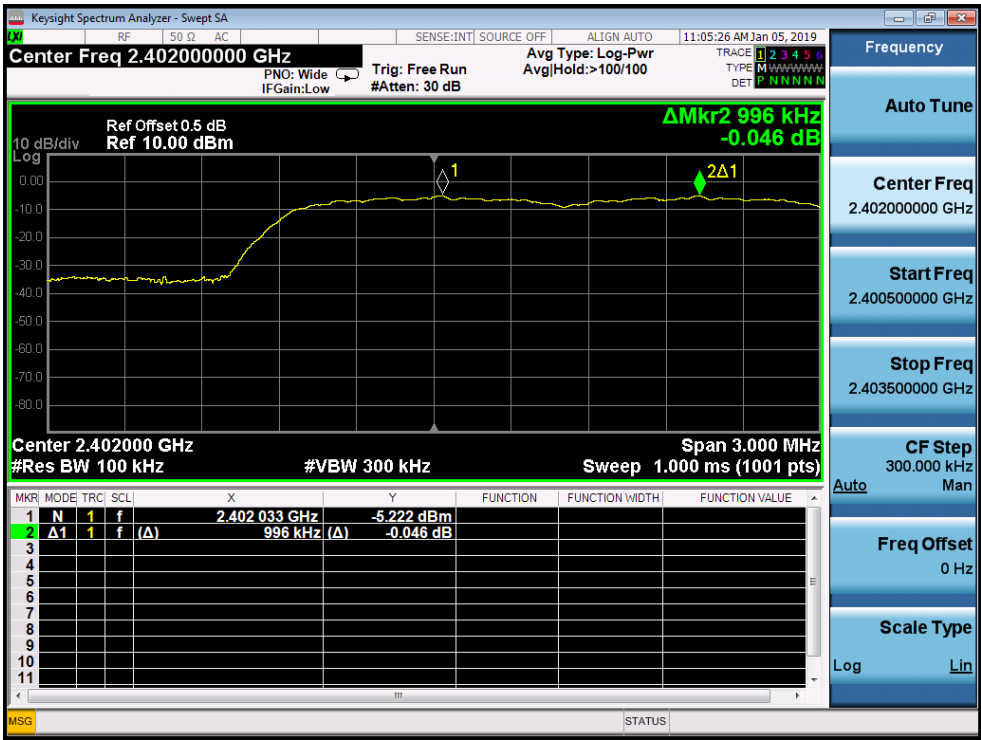



$\pi/4$ -DQPSK Middle Channel

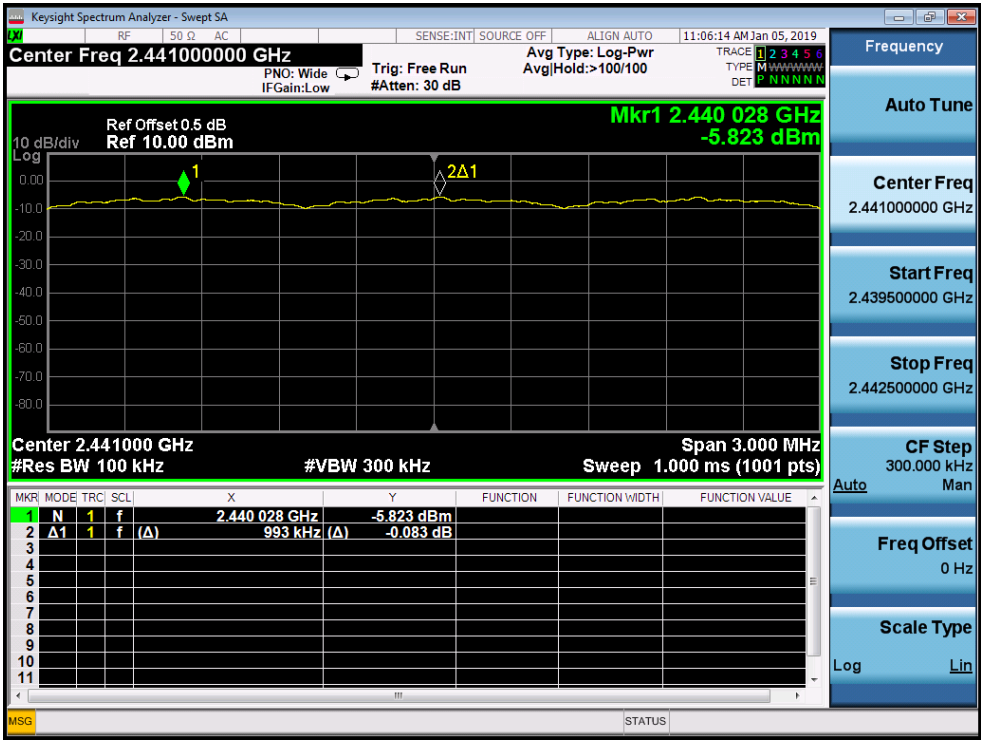


$\pi/4$ -DQPSK Highest Channel






8DPSK Lowest Channel

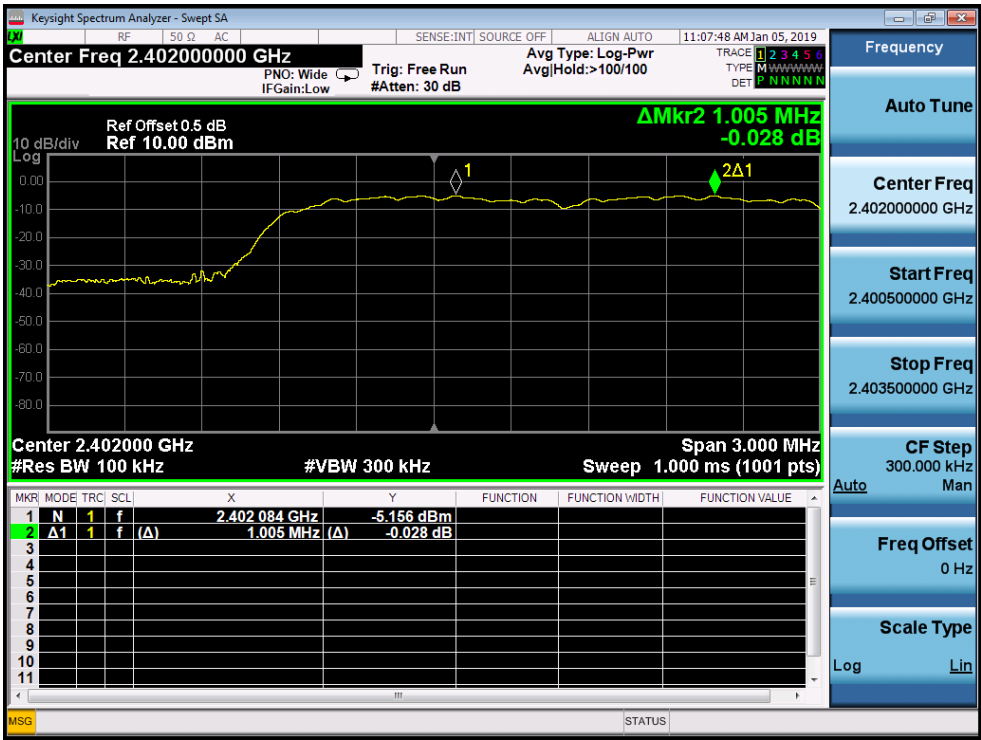

8DPSK Middle Channel

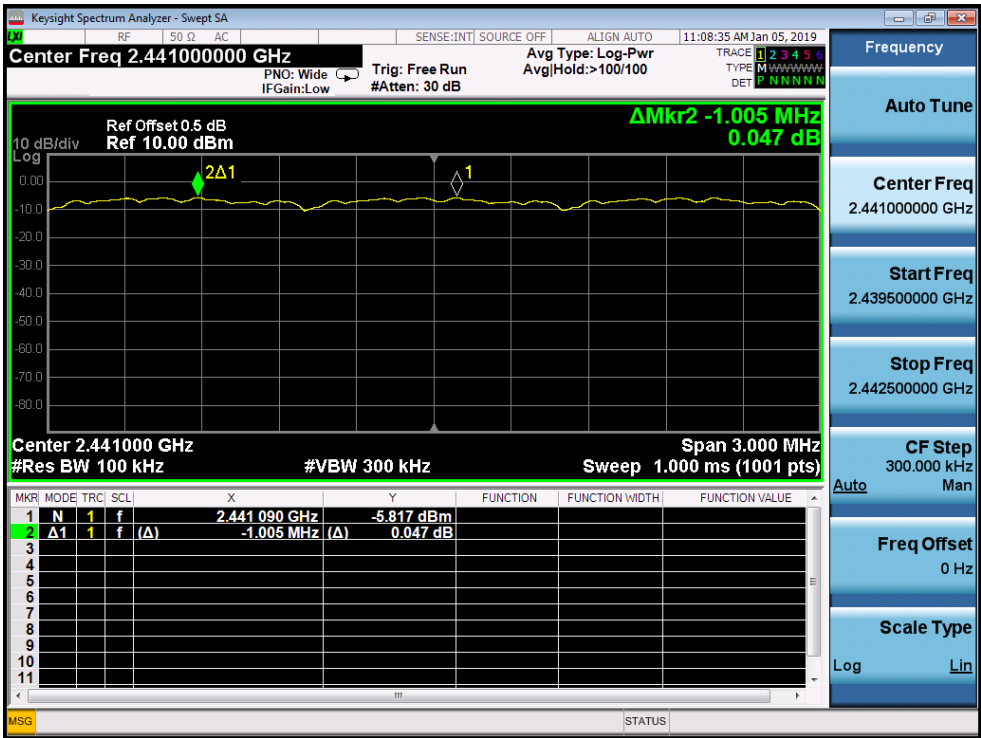



8DPSK Highest Channel




## 6. 20dB Bandwidth

### 6.1 Measurement Procedure

Maximum 20dB RF Bandwidth, FCC Rule 15.247(a)(1):

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RBW was chosen so that the display was a result of the hopping channel modulation. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. Use the spectrum 20dB down delta function to measure the bandwidth.

### 6.2 Test SET-UP (Block Diagram of Configuration)



### 6.3 Measurement Results


Refer to attached data chart.

|               |                             |                    |                  |
|---------------|-----------------------------|--------------------|------------------|
| Modulation:   | GFSK, $\pi/4$ -DQPSK, 8DPSK |                    |                  |
| RBW:          | 30KHz                       | VBW:               | 100KHz           |
| Packet:       | DH5                         | Spectrum Detector: | PK               |
| Test By:      | Sance                       | Test Date :        | January 05, 2018 |
| Temperature : | 22 °C                       | Humidity :         | 53 %             |
| Test Result:  | PASS                        |                    |                  |


| Channel frequency (MHz) | 20dB Down BW(kHz) |
|-------------------------|-------------------|
| GFSK                    |                   |
| 2402                    | 961.5             |
| 2441                    | 961.8             |
| 2480                    | 1027              |
| $\pi/4$ -DQPSK          |                   |
| 2402                    | 1368              |
| 2441                    | 1371              |
| 2480                    | 1372              |
| 8DPSK                   |                   |
| 2402                    | 1349              |
| 2441                    | 1352              |
| 2480                    | 1355              |




GFSK Lowest Channel

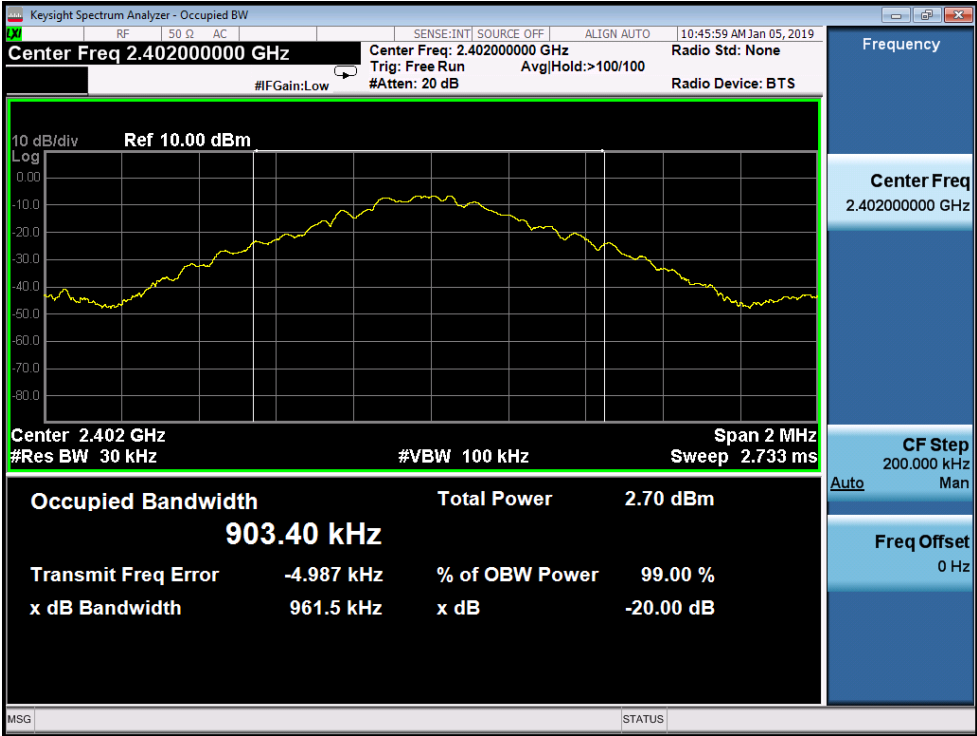


GFSK Middle Channel

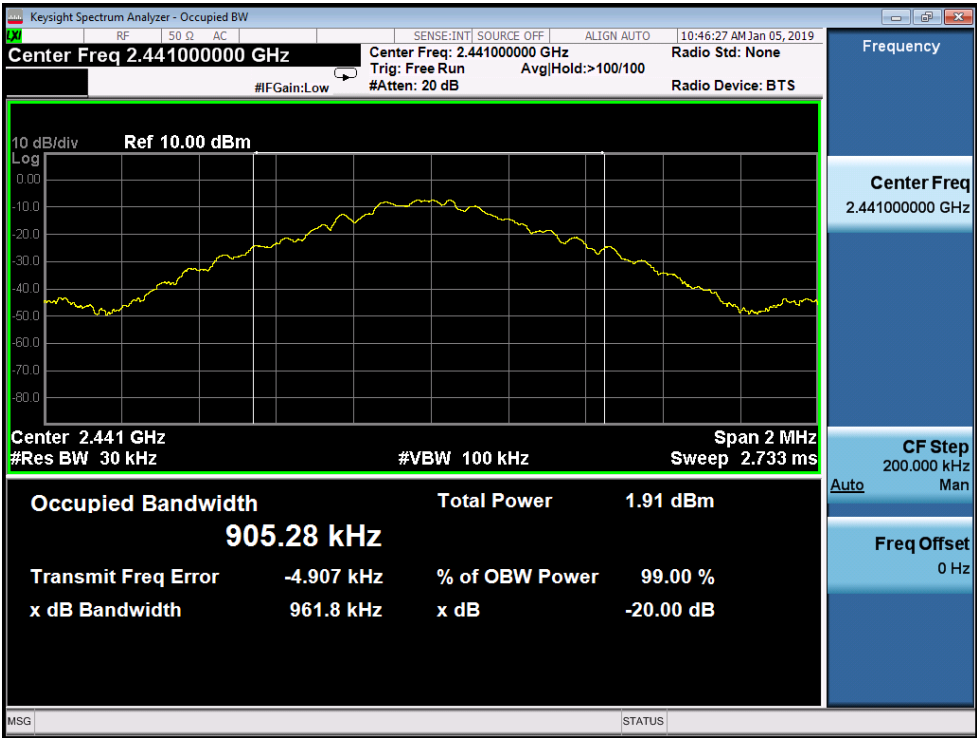


GFSK Highest Channel

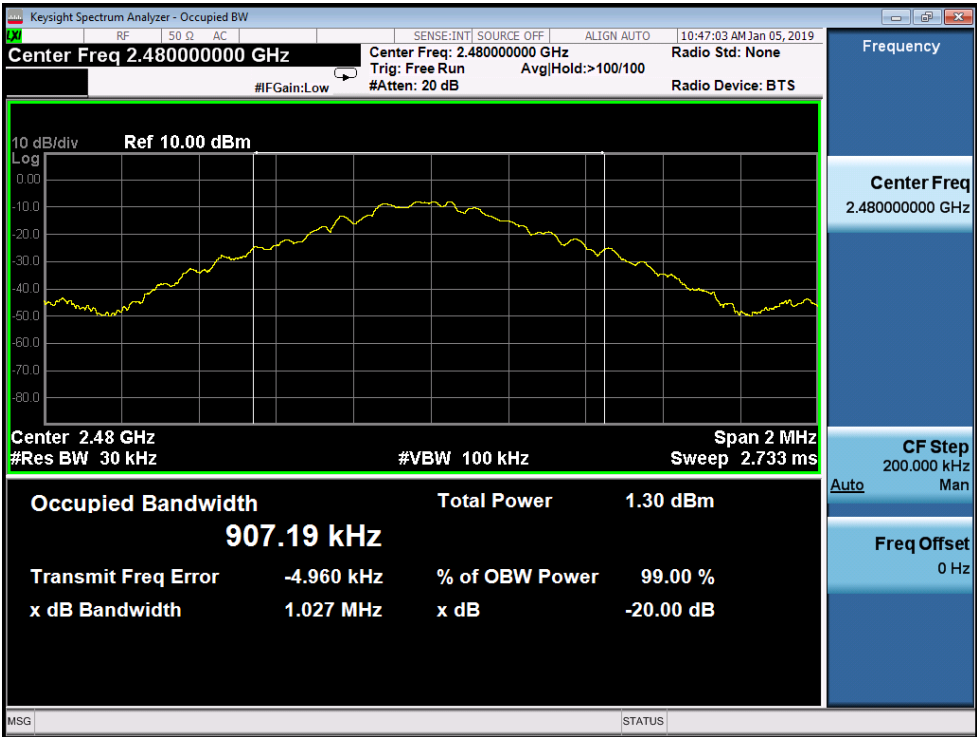


$\pi/4$ -DQPSK Lowest Channel

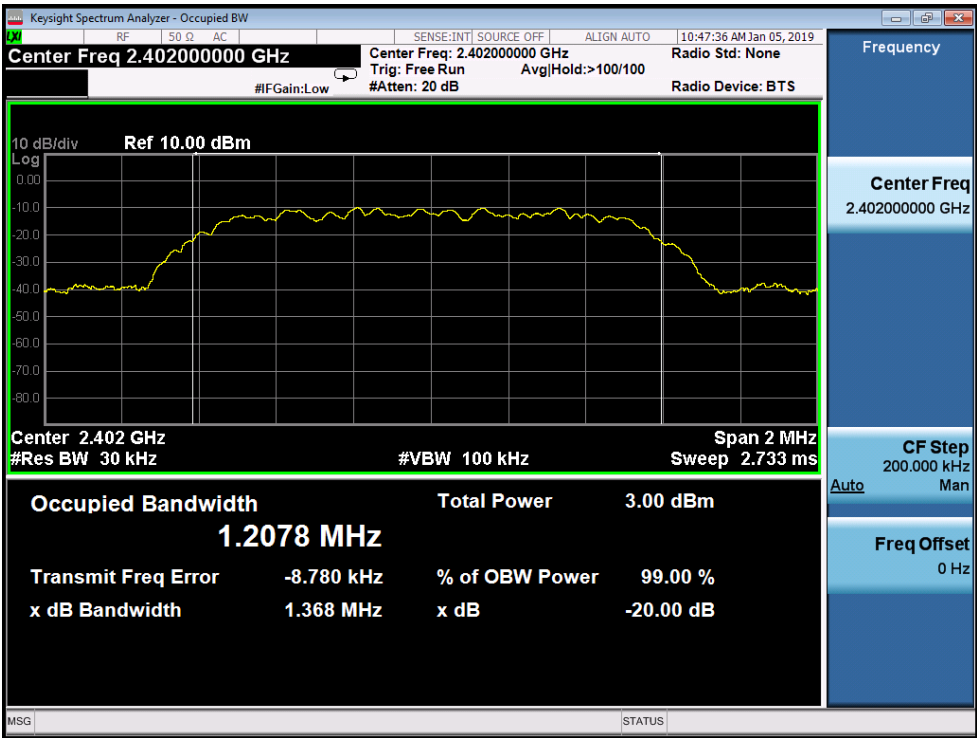


### $\pi/4$ -DQPSK Middle Channel

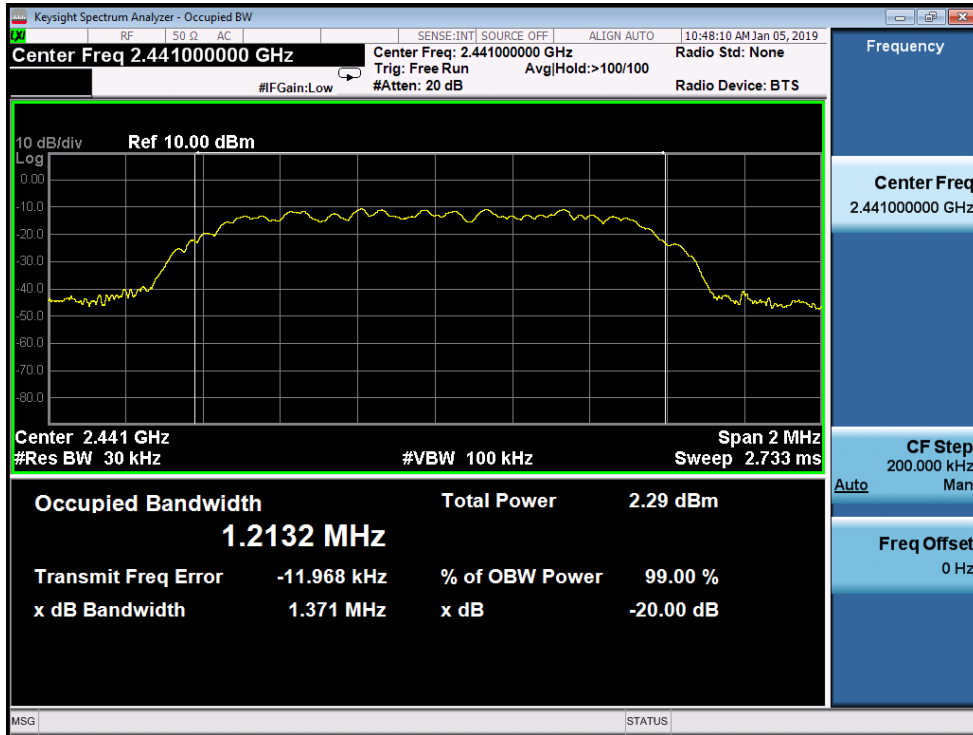


### $\pi/4$ -DQPSK Highest Channel

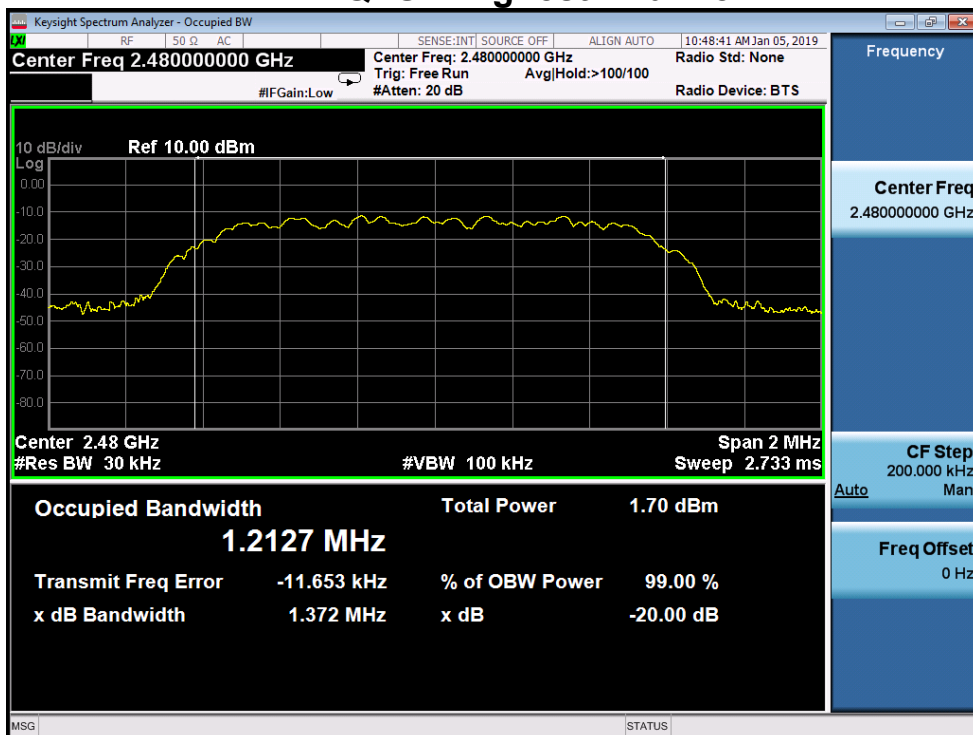

## 8DPSK Lowest Channel

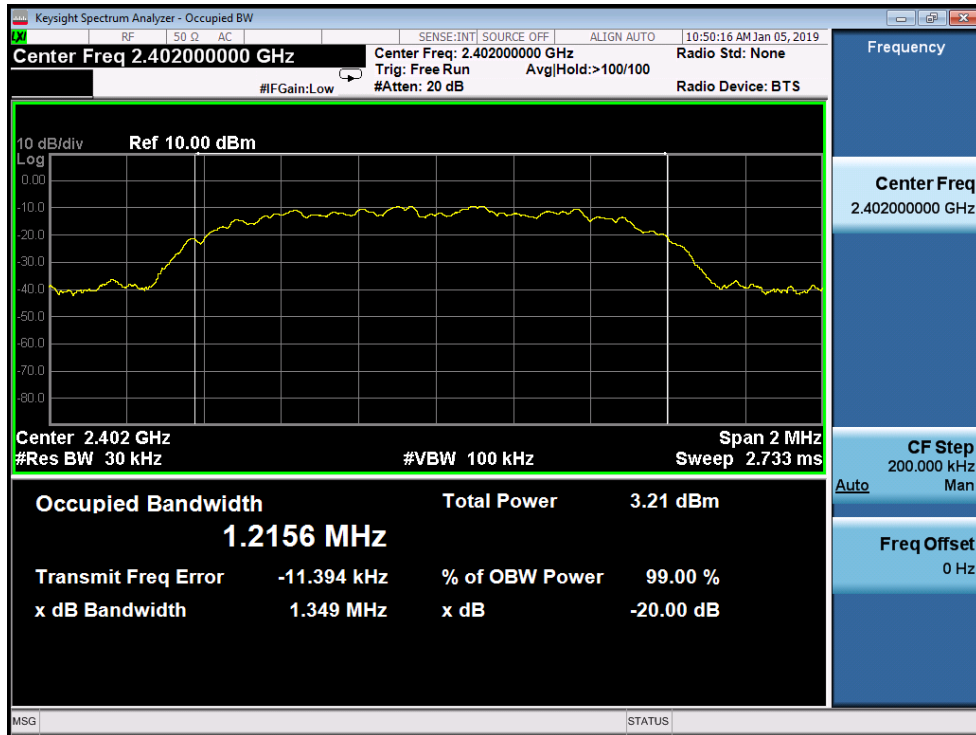


## 8DPSK Middle Channel

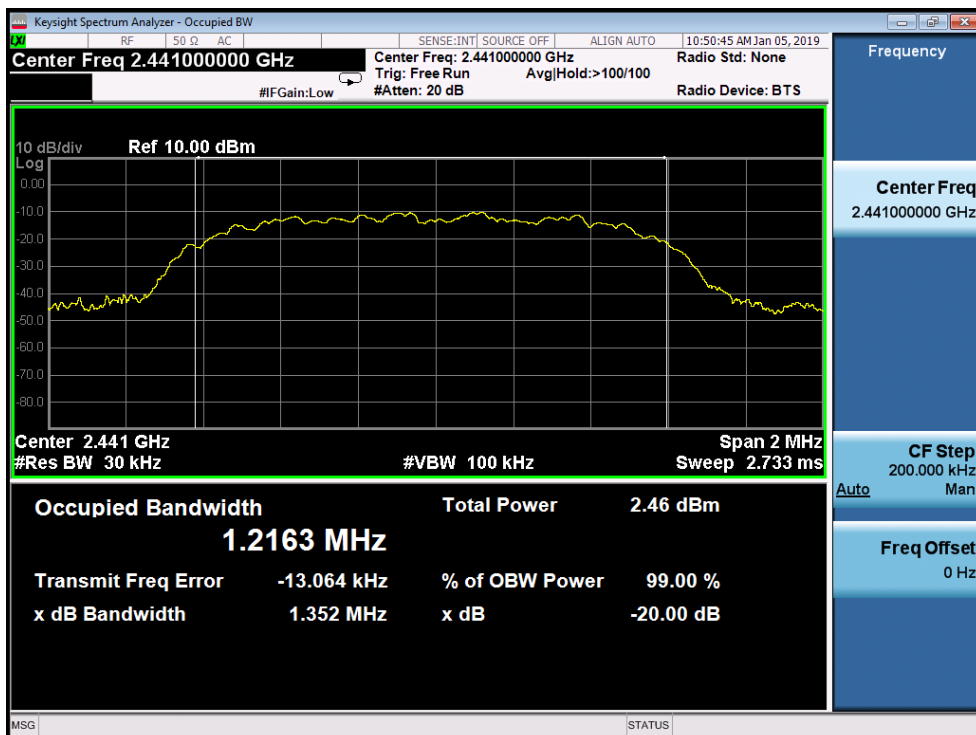



8DPSK Highest Channel

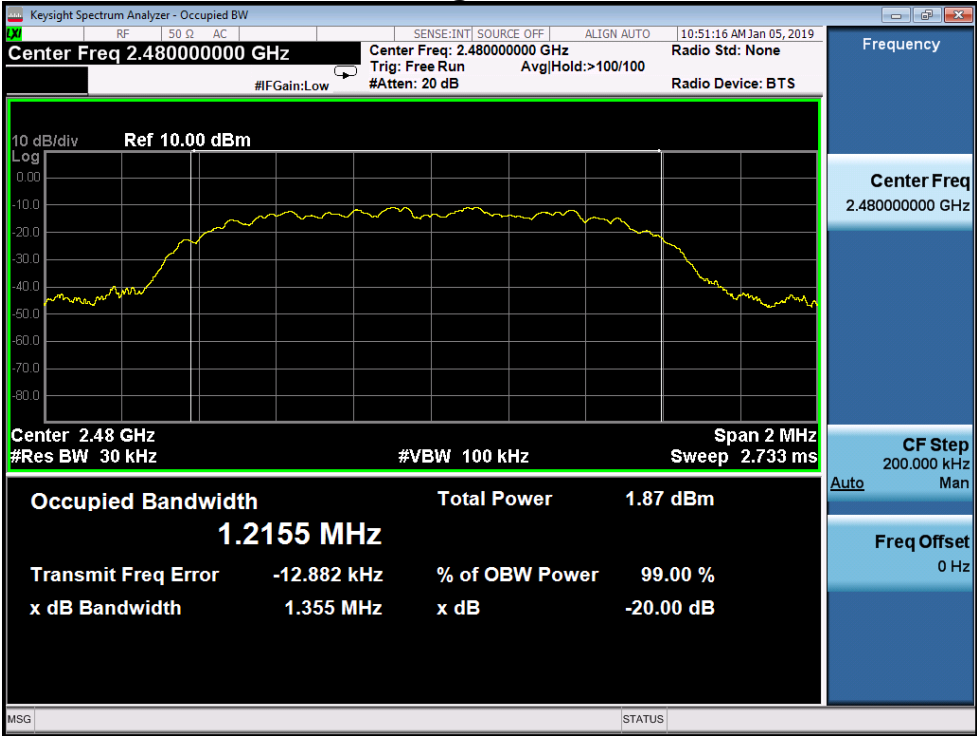


## 7. Hopping Channel Number

### 7.1 Measurement Procedure

Minimum Number of Hopping Frequencies, FCC Rule 15.247(a)(1)(iii):

Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum, and the spectrum analyzer set to MAX HOLD readings were taken for 3-5 minutes. The channel peaks so recorded were added together, and the total number compared to the minimum number of channels required in the regulation.

### 7.2 Test SET-UP (Block Diagram of Configuration)




### 7.3 Measurement Results

|               |                             |                    |                  |
|---------------|-----------------------------|--------------------|------------------|
| Modulation    | GFSK, $\pi/4$ -DQPSK, 8DPSK |                    |                  |
| RBW:          | 100KHz                      | VBW:               | 300KHz           |
| Packet:       | DH5                         | Spectrum Detector: | PK               |
| Test By:      | Sance                       | Test Date :        | January 05, 2018 |
| Temperature : | 22 °C                       | Humidity :         | 53 %             |
| Test Result:  | PASS                        |                    |                  |

| Hopping Channel Frequency Range | Number of Hopping Channels | Limit     |
|---------------------------------|----------------------------|-----------|
| 2402-2480                       | 79                         | $\geq 15$ |

The worst case: 8DPSK

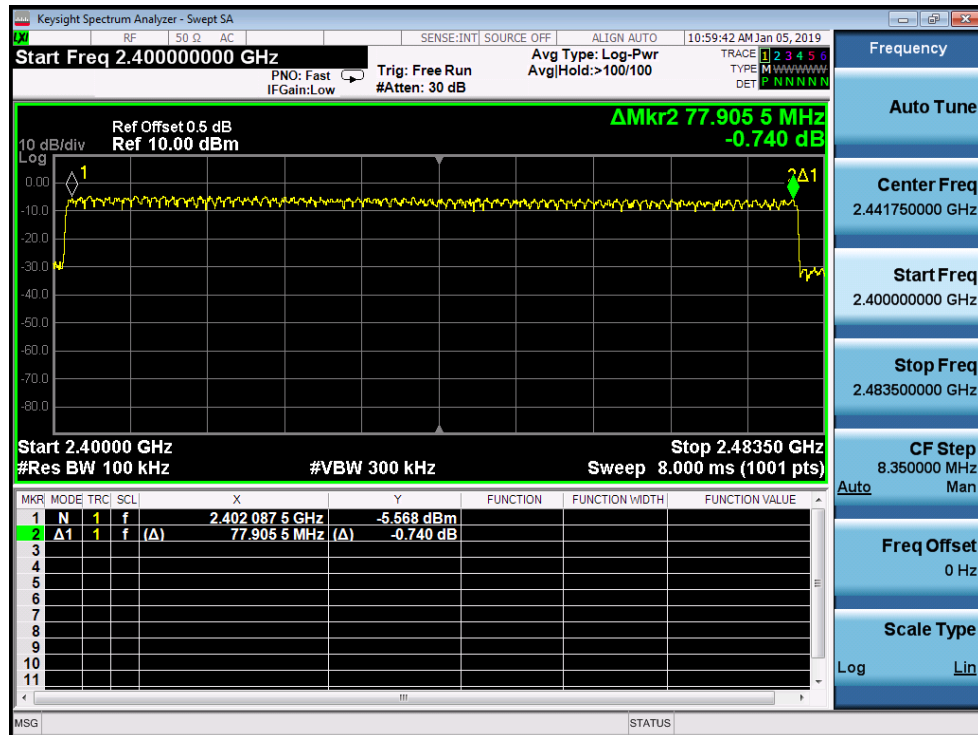

## 8. Time of Occupancy (Dwell Time)

### 8.1 Measurement Procedure

Average Channel Occupancy Time, FCC Ref:15.247(a)(1)(iii):

Connect EUT antenna terminal to the spectrum analyzer with a low loss cable.

The spectrum analyzer center frequency was set to one of the known hopping channels. The Sweep was set to 10 ms, the SPAN was set to Zero SPAN. The time duration of the transmissions so captured was measured with the Marker Delta function

### 8.2 Measurement Results


The maximum number of hopping channels in 31.6s (0.4s/Channel x 79 Channel)

Refer to attached data chart.


|                    |                             |               |       |
|--------------------|-----------------------------|---------------|-------|
| Modulation :       | GFSK, $\pi/4$ -DQPSK, 8DPSK |               |       |
| RBW :              | 1MHz                        | VBW :         | 1MHz  |
| Spectrum Detector: | PK                          | Test By:      | Sance |
| Test Date :        | August 15, 2018             | Temperature : | 22°C  |
| Test Result:       | PASS                        | Humidity :    | 53 %  |



| Packet         | Frequency<br>(MHz) | Result<br>(msec) |                            |        | Limit<br>(msec) |
|----------------|--------------------|------------------|----------------------------|--------|-----------------|
| GFSK           |                    |                  |                            |        |                 |
| DH1            | 2441               | 0.381            | $(ms)*(1600/(2*79))*31.6=$ | 121.92 | 400             |
| DH3            | 2441               | 1.639            | $(ms)*(1600/(4*79))*31.6=$ | 262.24 | 400             |
| DH5            | 2441               | 2.922            | $(ms)*(1600/(6*79))*31.6=$ | 311.68 | 400             |
| $\pi/4$ -DQPSK |                    |                  |                            |        |                 |
| 2-DH1          | 2441               | 0.388            | $(ms)*(1600/(2*79))*31.6=$ | 124.16 | 400             |
| 2-DH3          | 2441               | 1.682            | $(ms)*(1600/(4*79))*31.6=$ | 269.12 | 400             |
| 2-DH5          | 2441               | 2.920            | $(ms)*(1600/(6*79))*31.6=$ | 311.47 | 400             |
| $\pi/4$ -DQPSK |                    |                  |                            |        |                 |
| 3-DH1          | 2441               | 0.386            | $(ms)*(1600/(2*79))*31.6=$ | 123.52 | 400             |
| 3-DH3          | 2441               | 1.678            | $(ms)*(1600/(4*79))*31.6=$ | 268.48 | 400             |
| 3-DH5          | 2441               | 2.930            | $(ms)*(1600/(6*79))*31.6=$ | 312.53 | 400             |

GFSK DH1

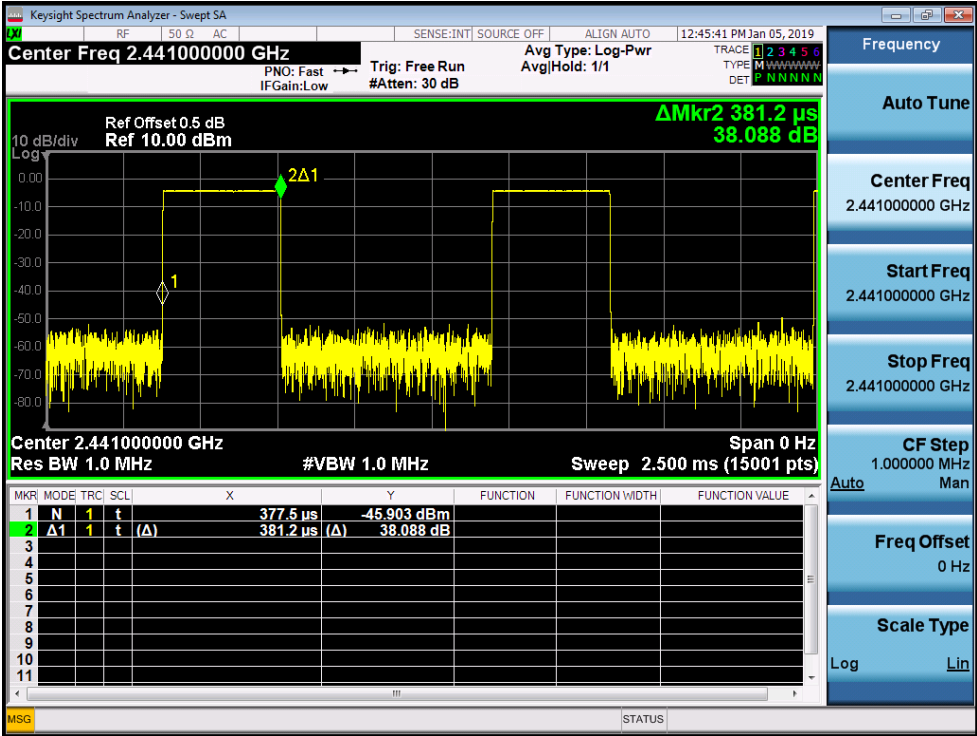


GFSK DH3

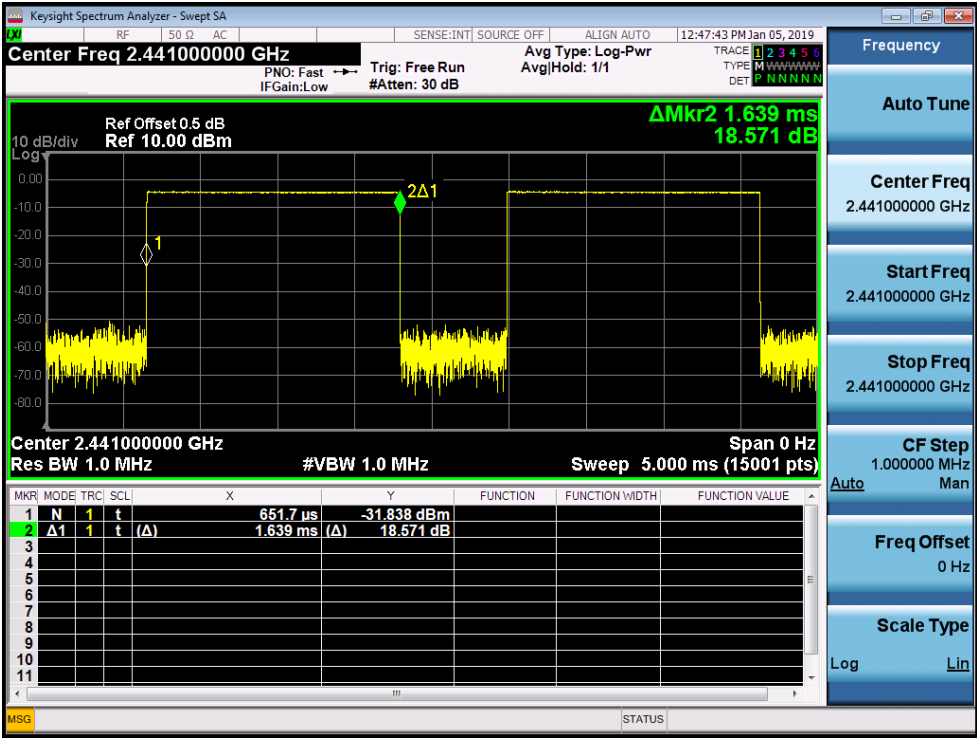


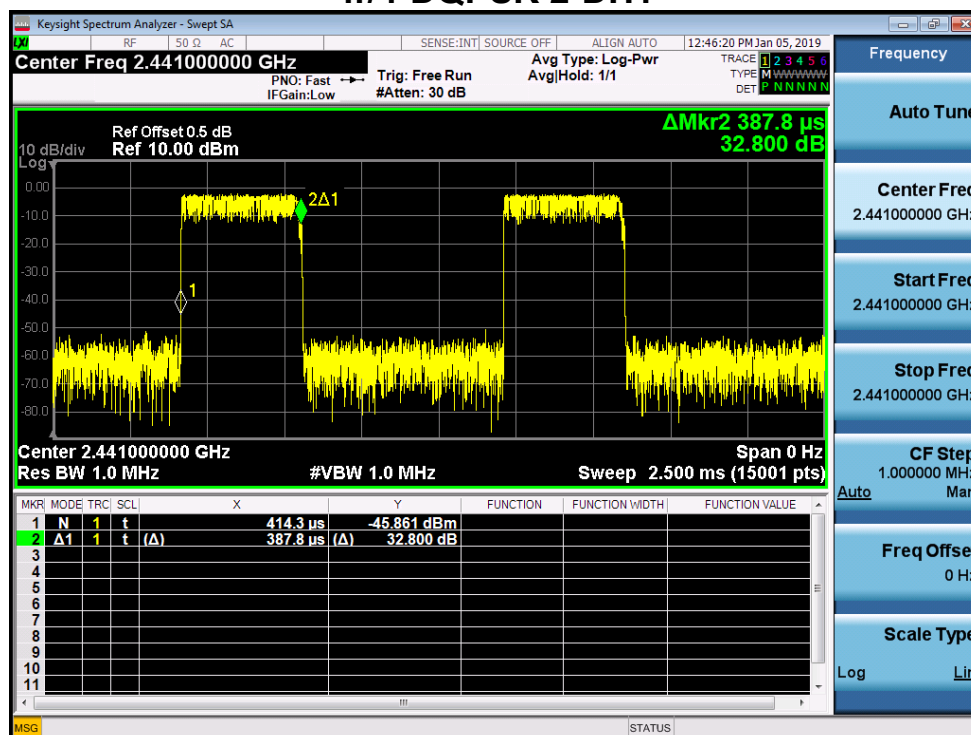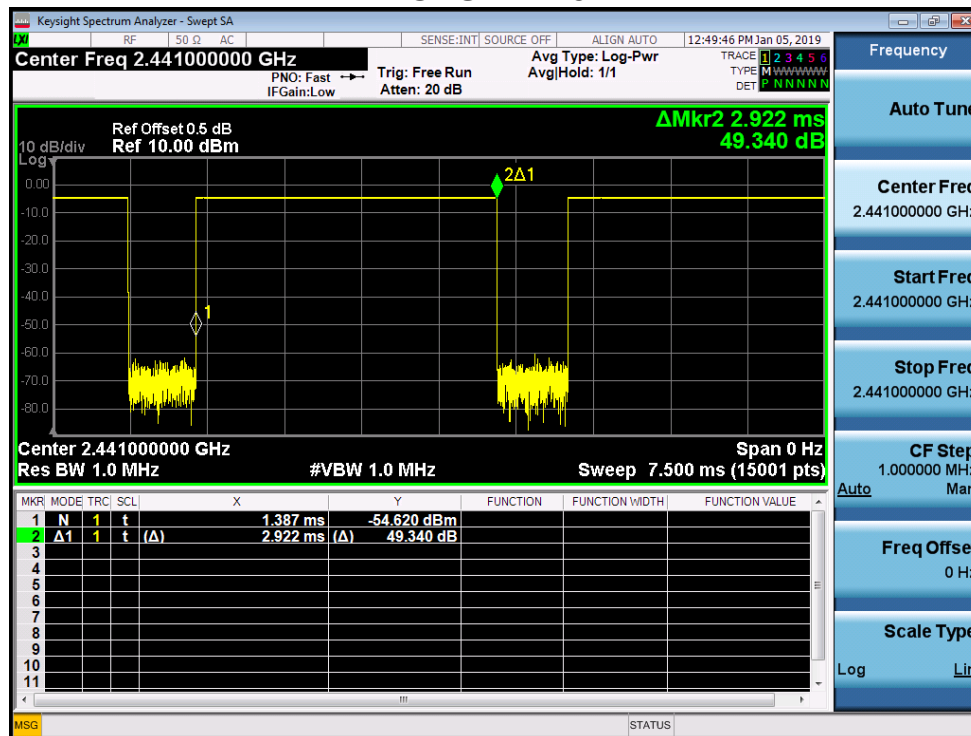

$\pi/4$ -DQPSK 2-DH3

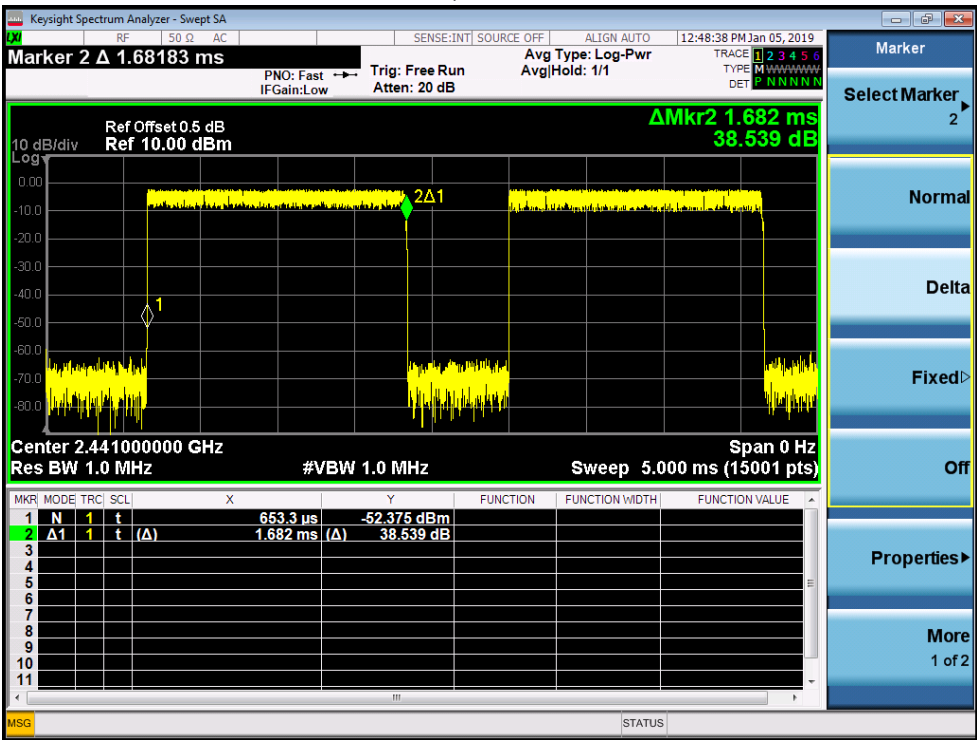


$\pi/4$ -DQPSK 2-DH5

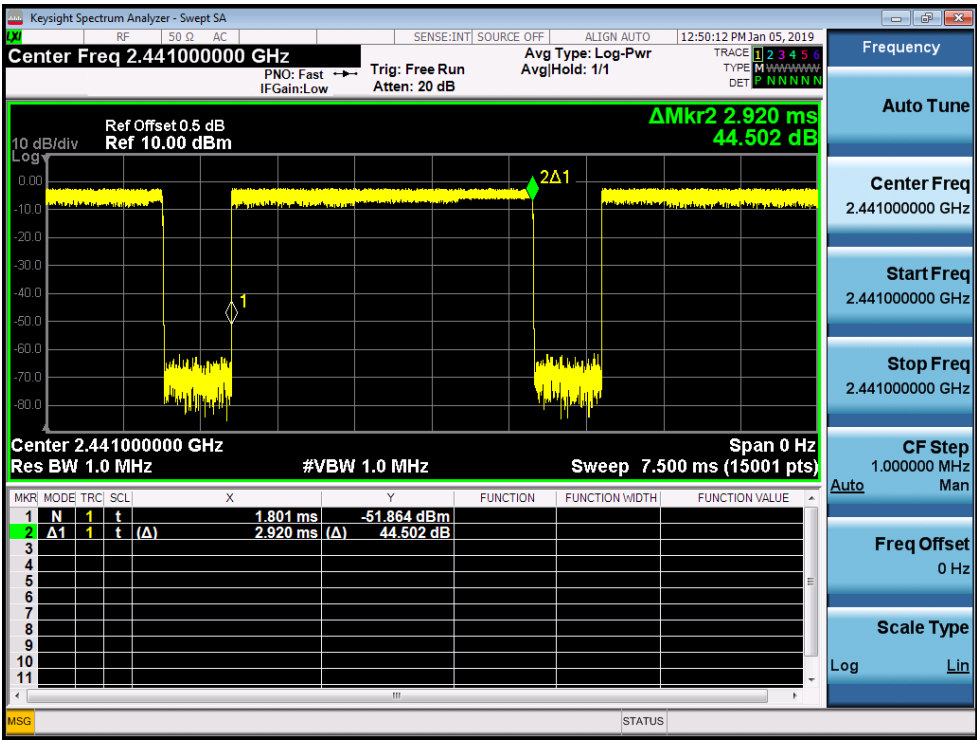




8DPSK 3-DH1

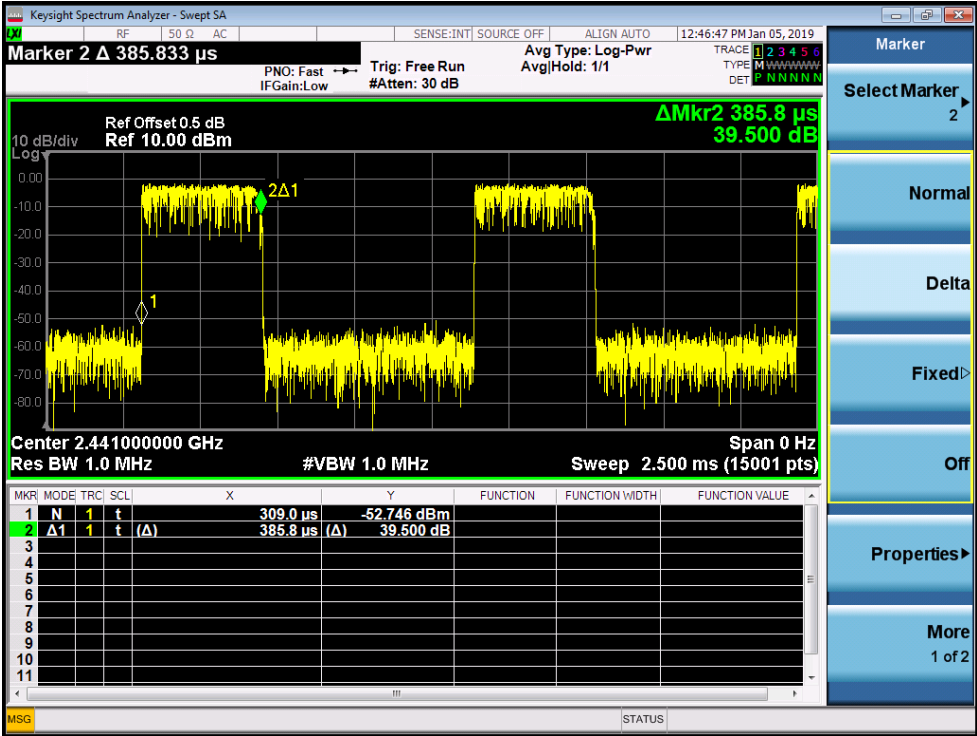


8DPSK 3-DH3

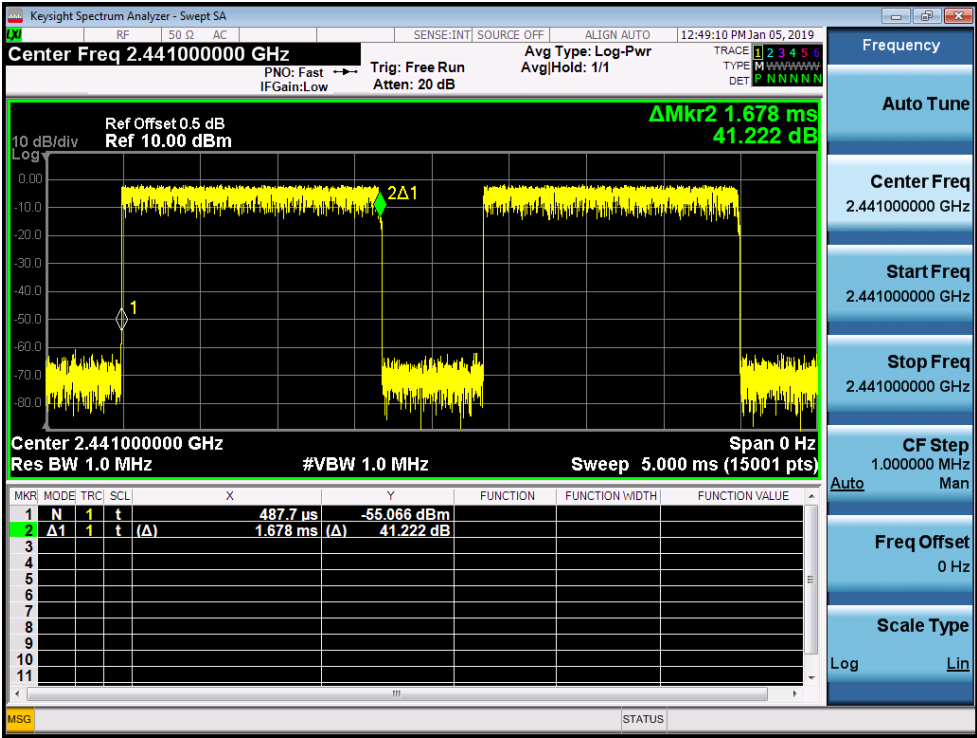



8DPSK 3-DH5

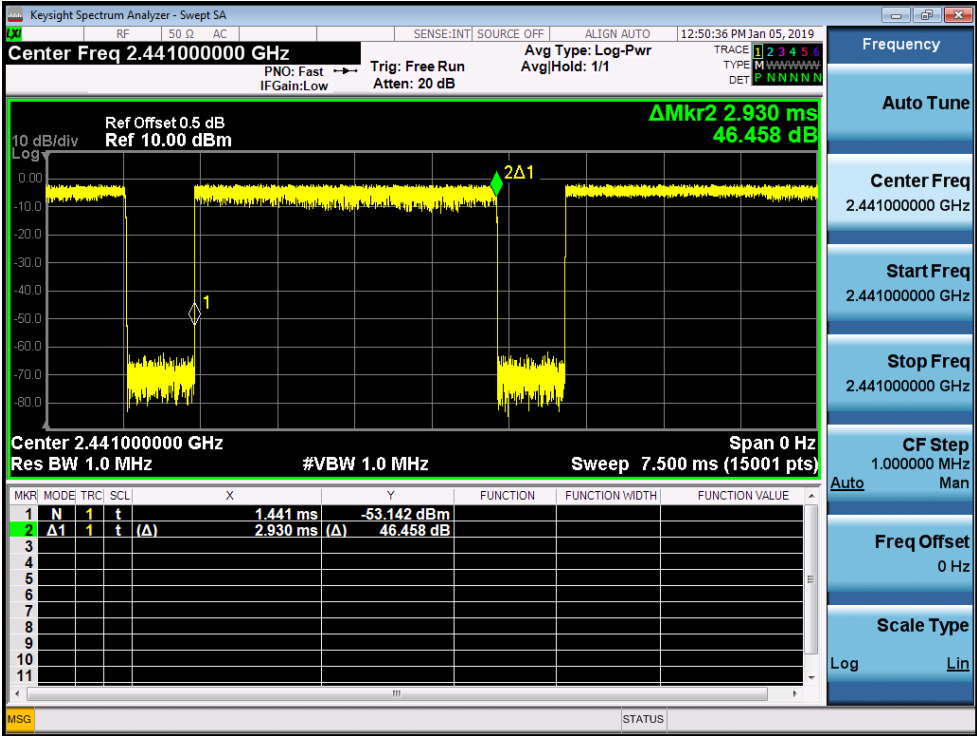

## 9. MAXIMUM PEAK OUTPUT POWER

### 9.1 Measurement Procedure

Maximum Conducted Output Power at Antenna Terminals, FCC Rules 15.247(b)(1):

Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum. The analyzer was set for RBW > 20dB bandwidth and power was read directly in dBm. Cable loss was considered during this measurement.


### 9.2 Measurement Results

Refer to attached data chart.


Modulation : GFSK,  $\pi/4$ -DQPSK, 8DPSK  
RBW : 3MHz VBW : 3MHz  
Spectrum Detector: PK Test Date : January 05, 2019  
Test By: Sance Temperature : 22 °C  
Test Result: PASS Humidity : 53 %

| Channel Frequency (MHz) | Cable Loss dB | Peak Power output(dBm) | Peak Power output(mW) | Peak Power Limit(dBm) | Pass/Fail |
|-------------------------|---------------|------------------------|-----------------------|-----------------------|-----------|
| GFSK                    |               |                        |                       |                       |           |
| 2402.00                 | 1.5           | -3.603                 | 0.44                  | 21                    | PASS      |
| 2441.00                 | 1.5           | -4.374                 | 0.37                  | 21                    | PASS      |
| 2480.00                 | 1.5           | -4.986                 | 0.32                  | 21                    | PASS      |
| $\pi/4$ -DQPSK          |               |                        |                       |                       |           |
| 2402.00                 | 1.5           | -0.979                 | 0.80                  | 21                    | PASS      |
| 2441.00                 | 1.5           | -1.654                 | 0.68                  | 21                    | PASS      |
| 2480.00                 | 1.5           | -2.195                 | 0.60                  | 21                    | PASS      |
| 8DPSK                   |               |                        |                       |                       |           |
| 2402.00                 | 1.5           | -0.526                 | 0.89                  | 21                    | PASS      |
| 2441.00                 | 1.5           | -1.176                 | 0.76                  | 21                    | PASS      |
| 2480.00                 | 1.5           | -1.700                 | 0.68                  | 21                    | PASS      |


## GFSK Lowest Channel

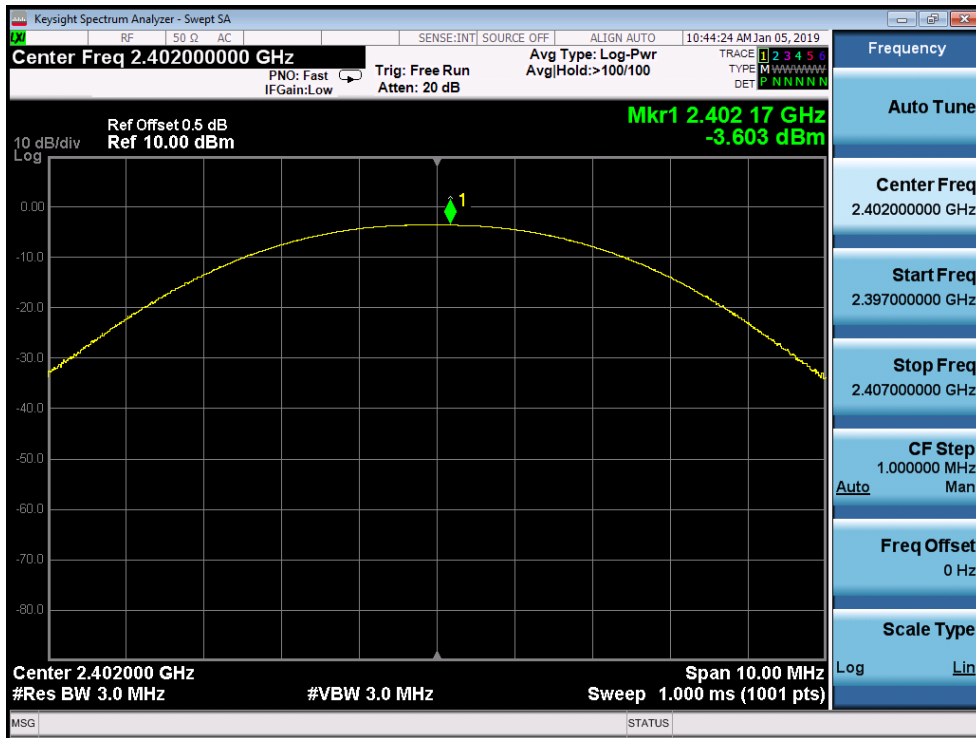


## GFSK Middle Channel

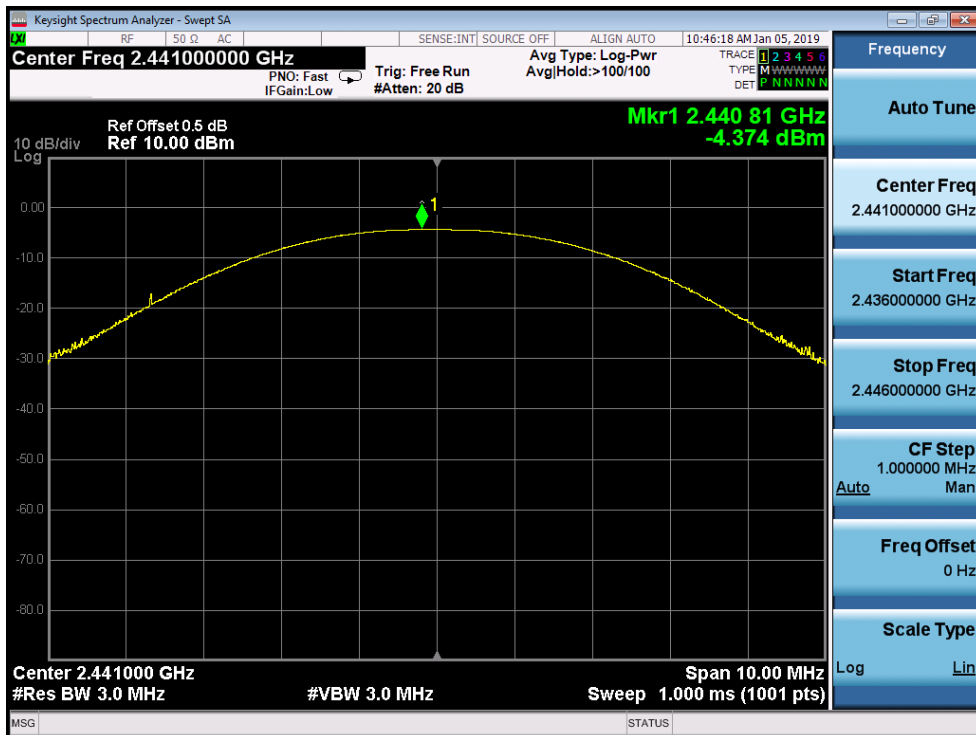


## GFSK Highest Channel

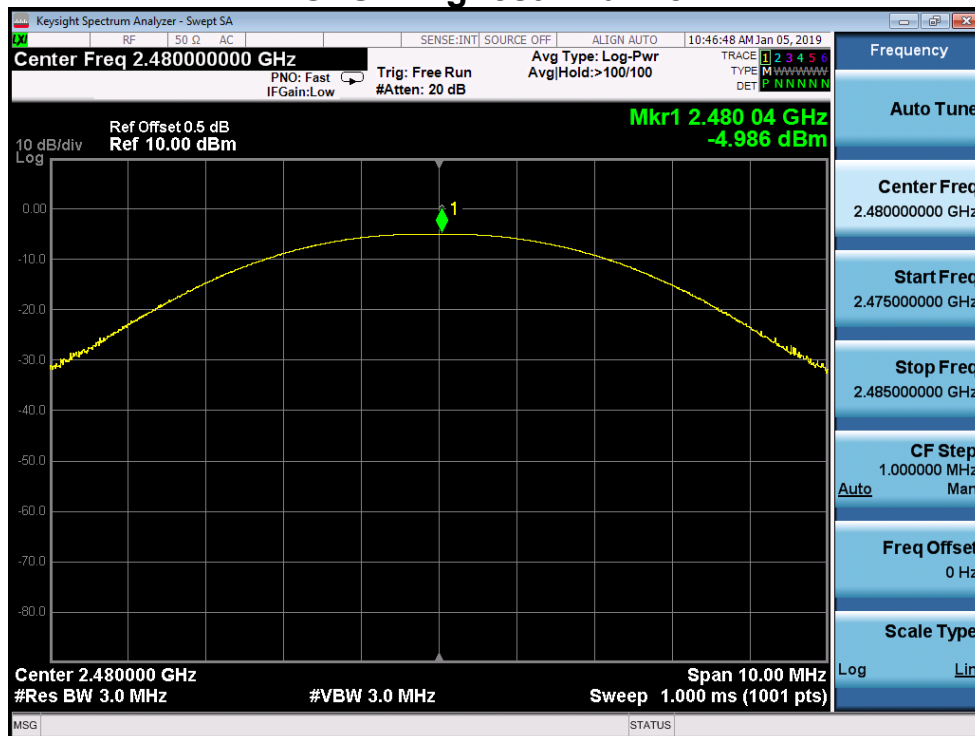


## $\pi/4$ -DQPSK Lowest Channel

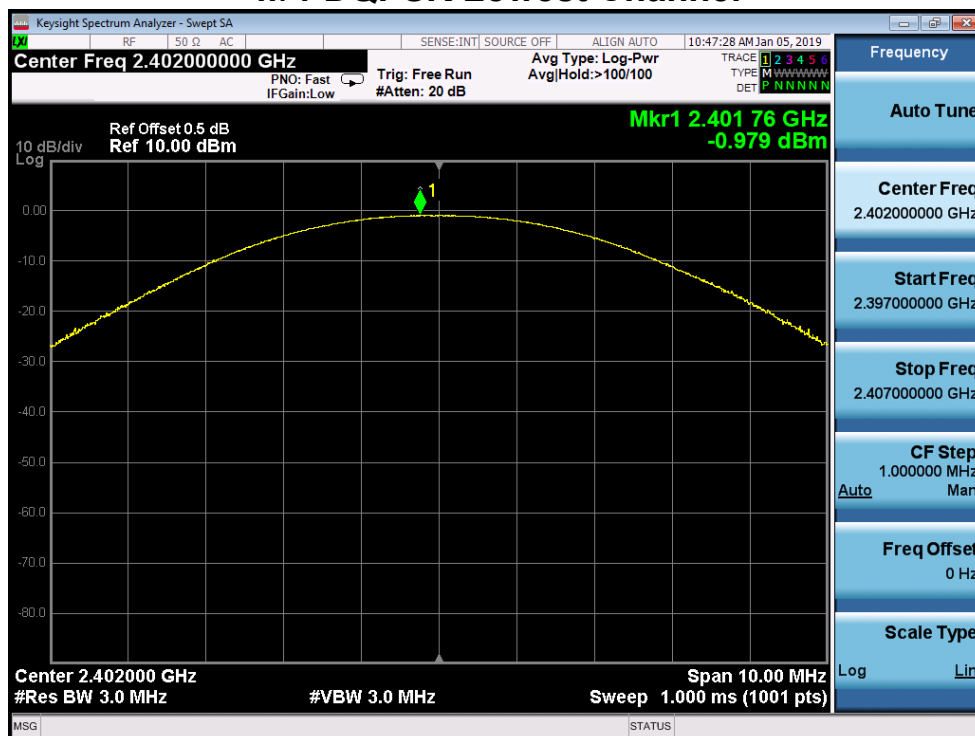


### $\pi/4$ -DQPSK Middle Channel

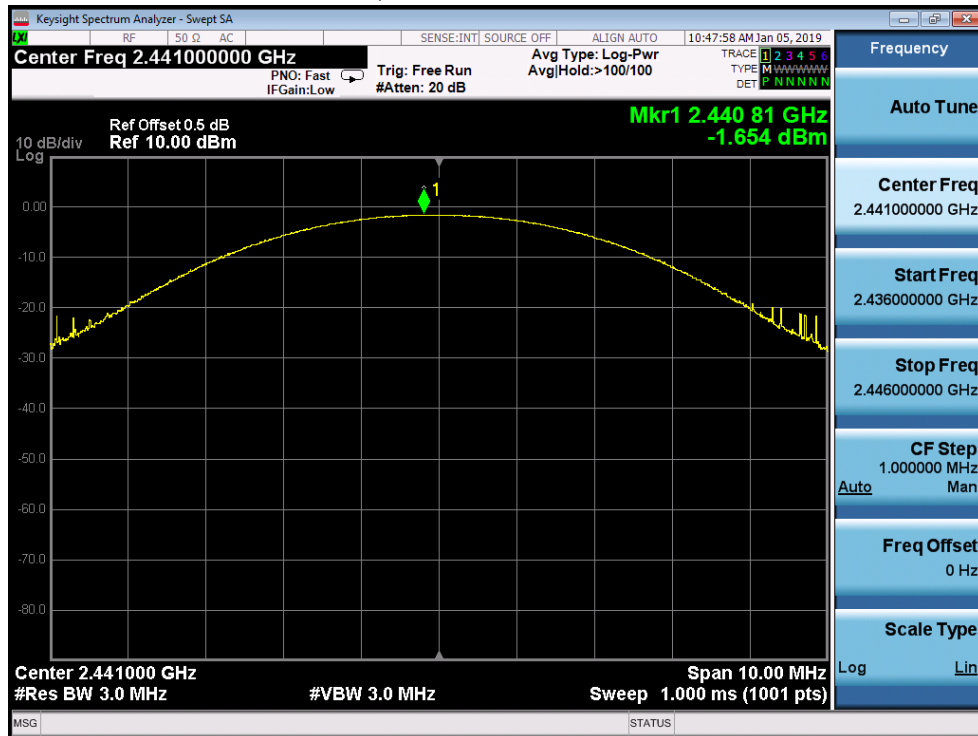


### $\pi/4$ -DQPSK Highest Channel

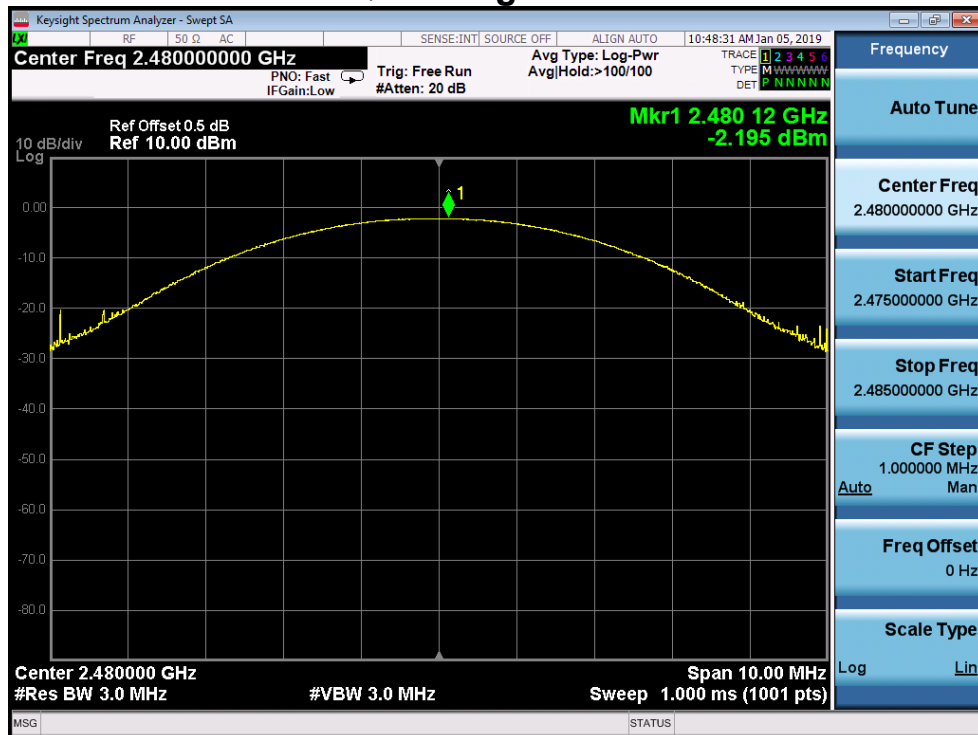

## 8DPSK Lowest Channel

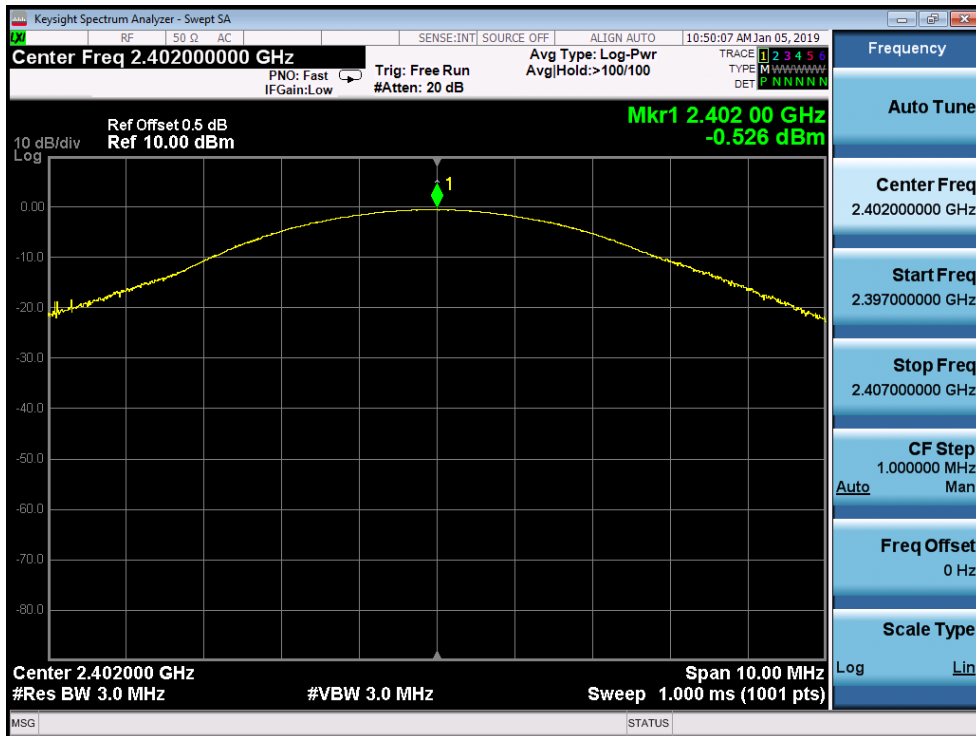


## 8DPSK Middle Channel

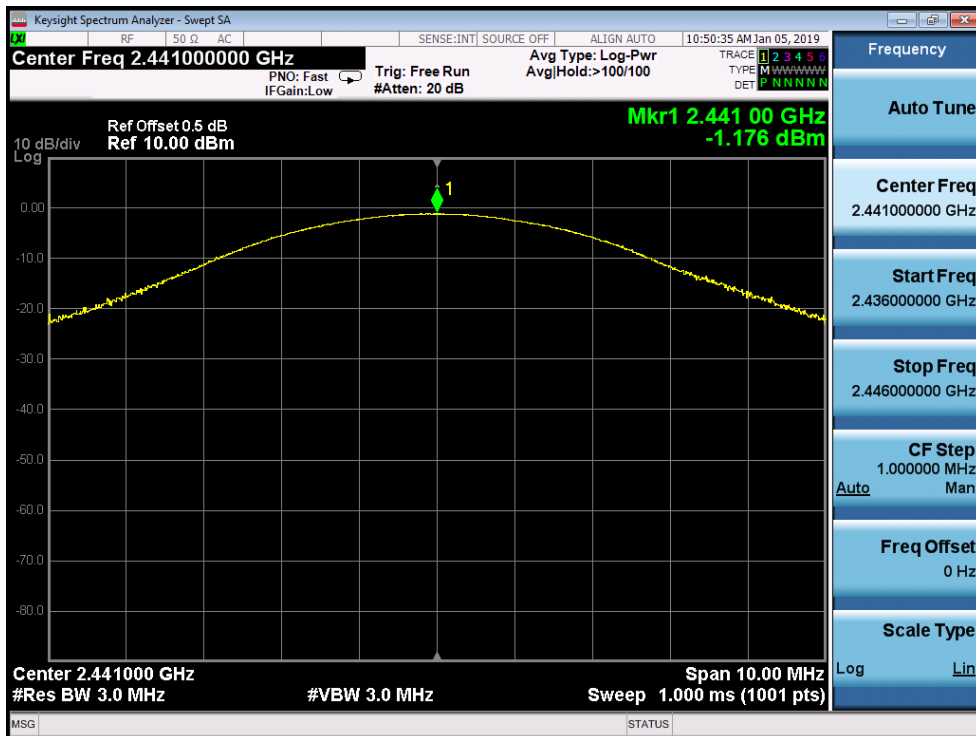



8DPSK Highest Channel

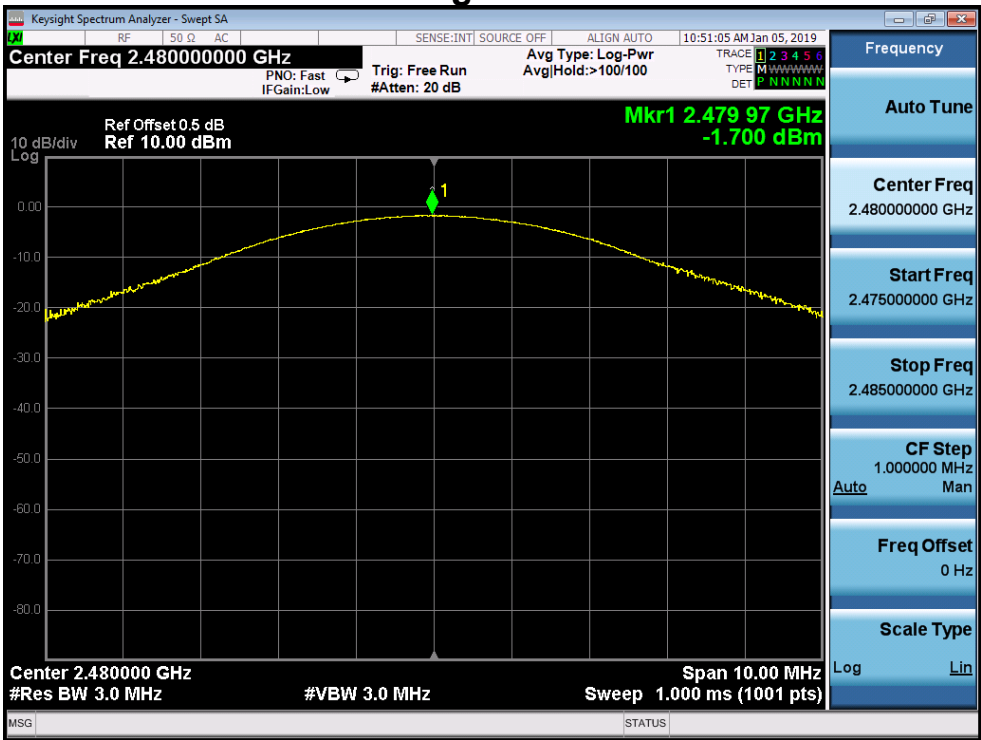

## 10. Band Edge

### 10.1 Measurement Procedure

Out of Band Conducted Emissions, FCC Rule 15.247(d):

The transmitter output is connected to spectrum analyzer. The resolution bandwidth is set to 100KHz, and the video bandwidth set to 300KHz.

### 10.2 Limit

15.247(d) In any 100KHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100KHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

### 10.3 Measurement Results



Please see below test table and plots.  
For Radiated Emission  
The worst case: 8DPSK

| Freq.<br>(MHz) | Ant.Pol.<br>(H/V) | Reading<br>Level(dBuV) |       | Factor<br>(dB/m) | Emission Level<br>(dBuV) |       | Limit 3m<br>(dBuV/m) |       | Margin<br>(dB) |        |
|----------------|-------------------|------------------------|-------|------------------|--------------------------|-------|----------------------|-------|----------------|--------|
|                |                   | PK                     | AV    |                  | PK                       | AV    | PK                   | AV    | PK             | AV     |
| 2390.000       | H                 | 48.17                  | 34.24 | 0.13             | 48.26                    | 34.33 | 74.00                | 54.00 | -25.74         | -19.67 |
| 2390.000       | V                 | 49.75                  | 35.47 | 0.13             | 49.84                    | 35.56 | 74.00                | 54.00 | -24.16         | -18.44 |
| 2483.500       | H                 | 48.01                  | 34.77 | 0.35             | 48.36                    | 35.12 | 74.00                | 54.00 | -25.64         | -18.88 |
| 2483.500       | V                 | 47.55                  | 34.23 | 0.35             | 47.90                    | 34.58 | 74.00                | 54.00 | -26.10         | -19.42 |


- Note:**
- (1) Emission Level= Reading Level + Factor
  - (2) Factor= Antenna Gain + Cable Loss – Amplifier Gain
  - (3) Horn antenna used for the emission over 1000MHz.

For RF Conducted



## GFSK Lowest Channel

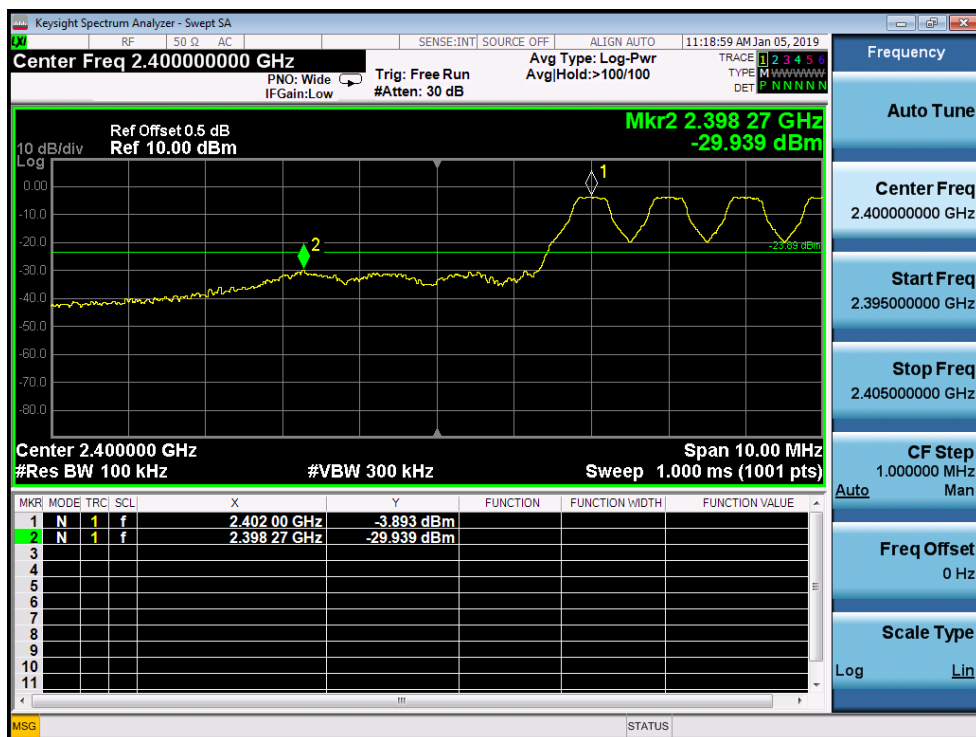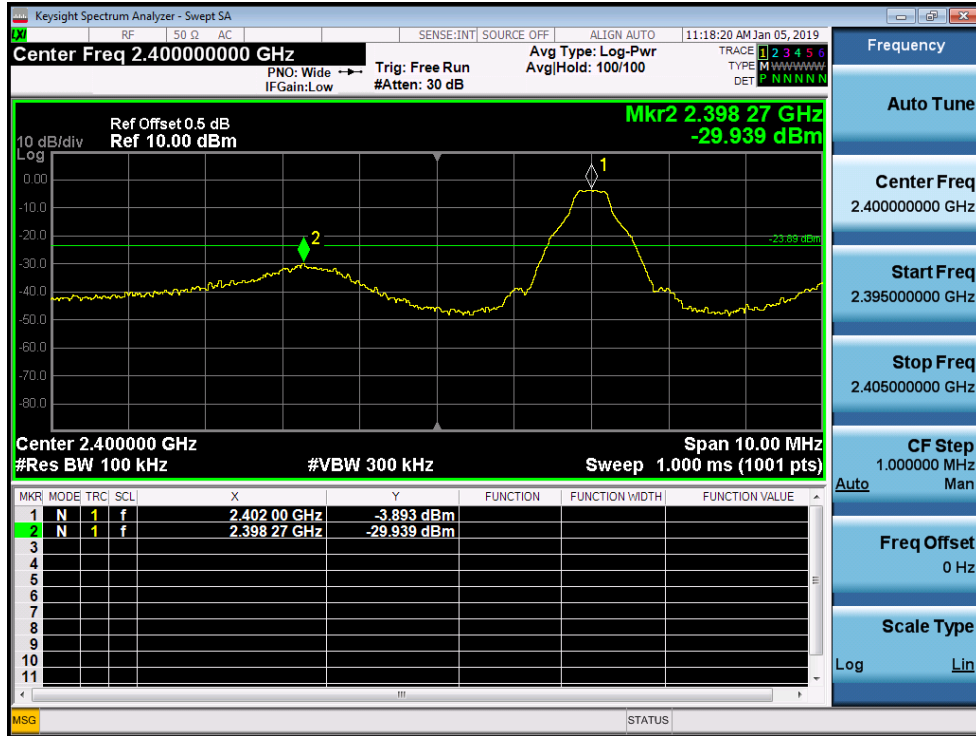


## GFSK Highest Channel

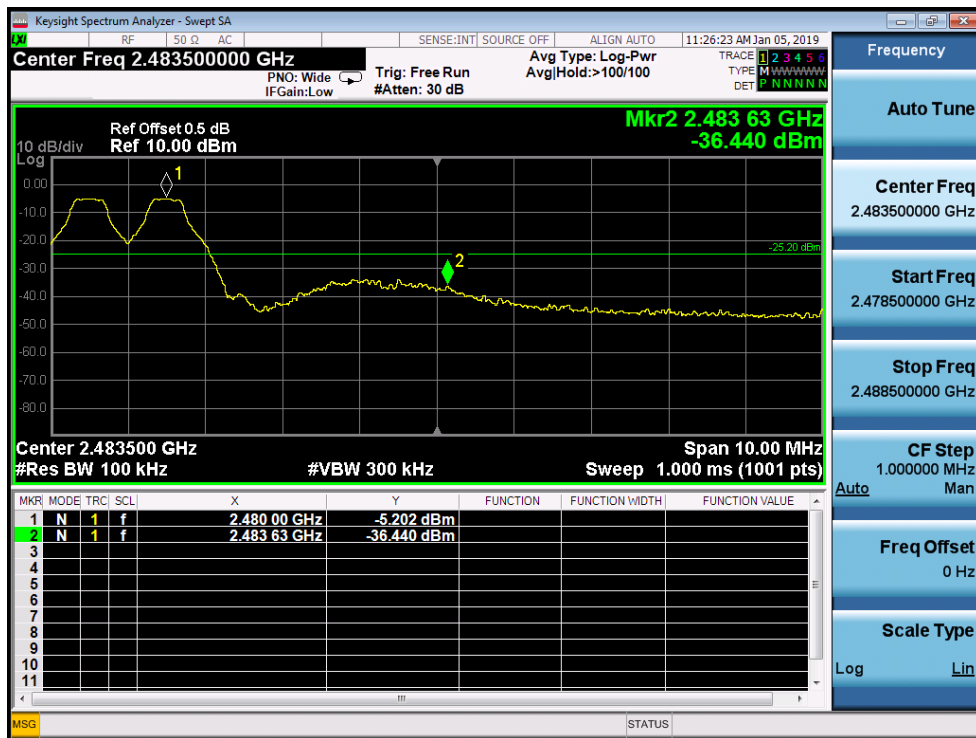



$\pi/4$ -DQPSK Lowest Channel

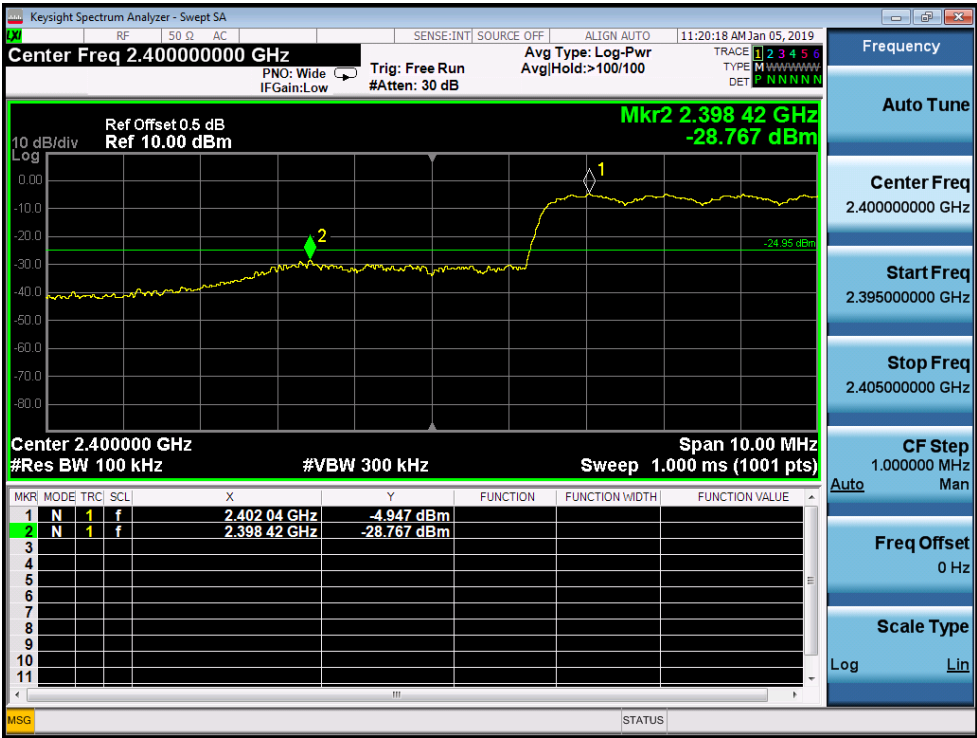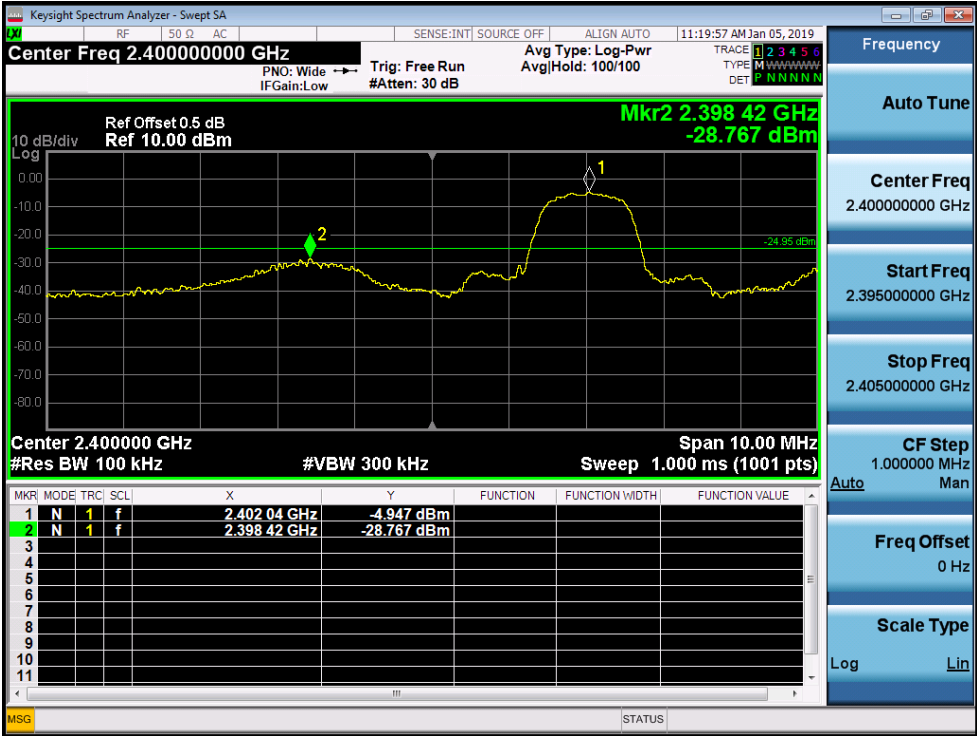



## $\pi/4$ -DQPSK Highest Channel

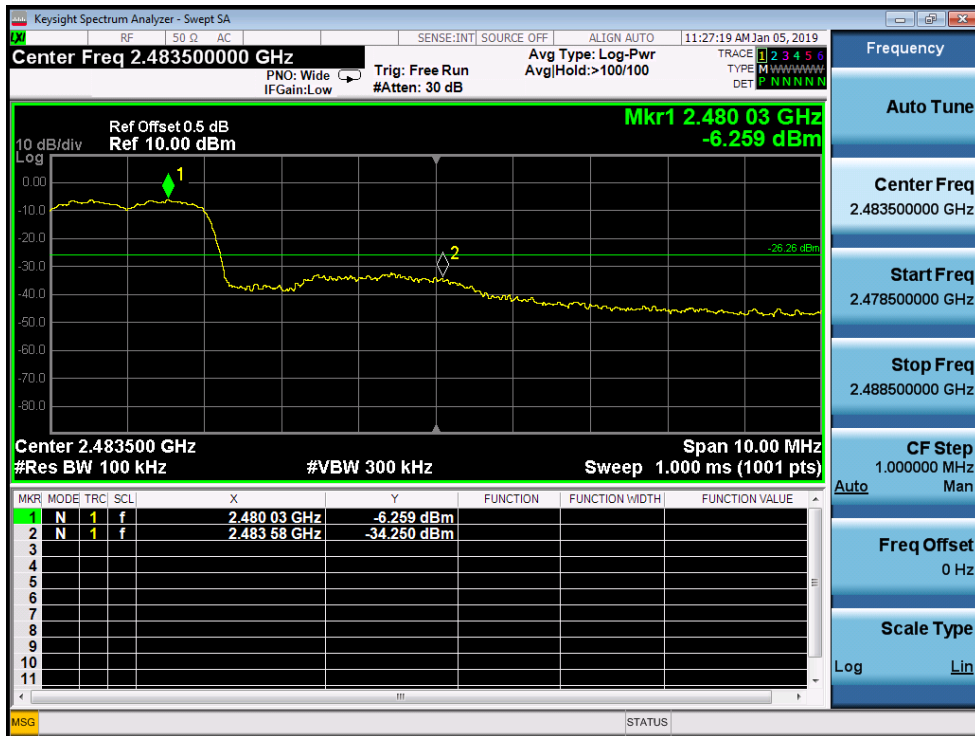

## 8DPSK Lowest Channel

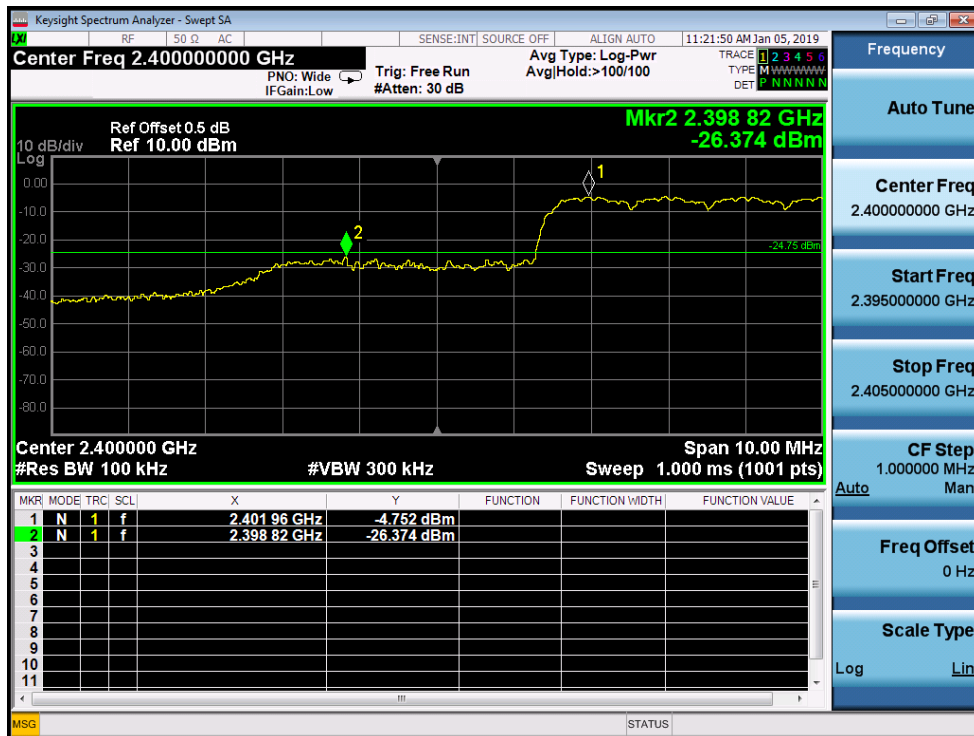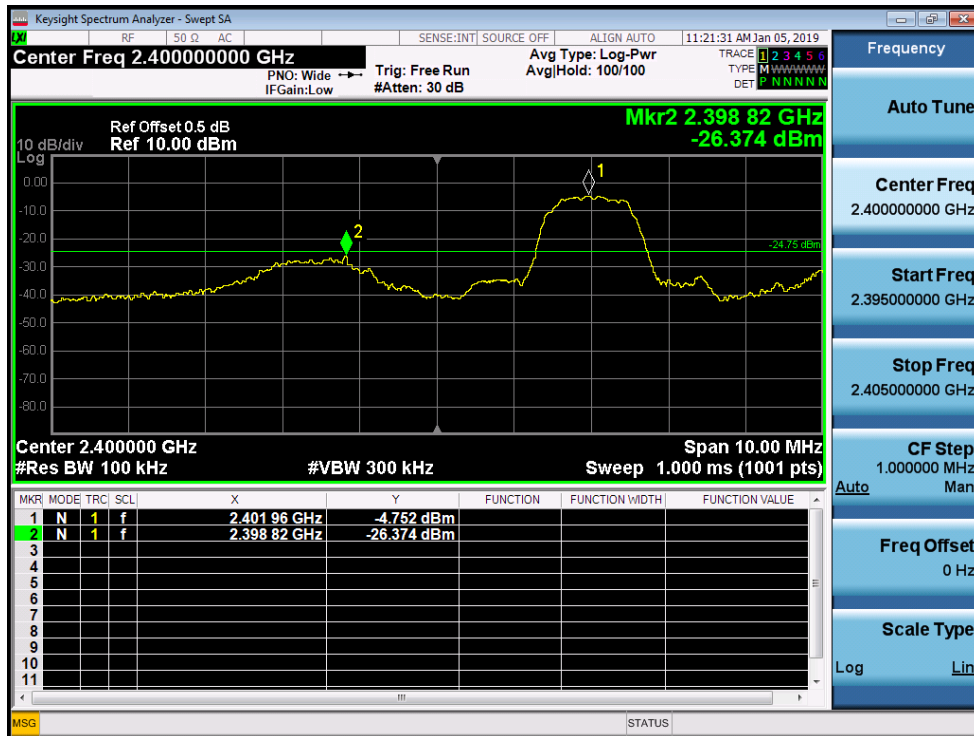

## 8DPSK Highest Channel

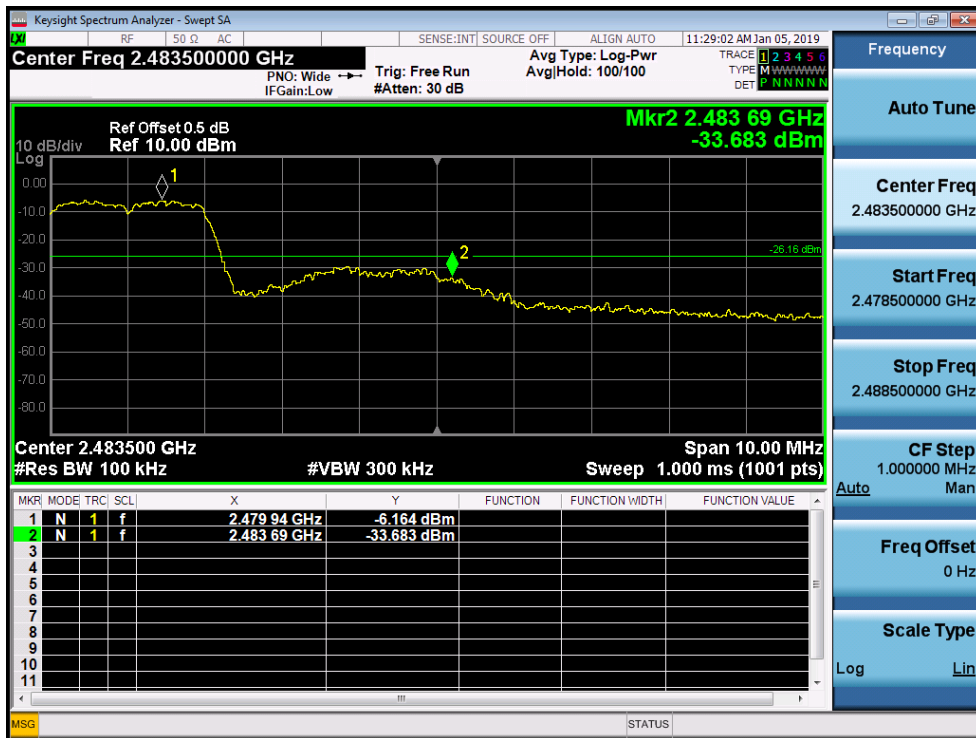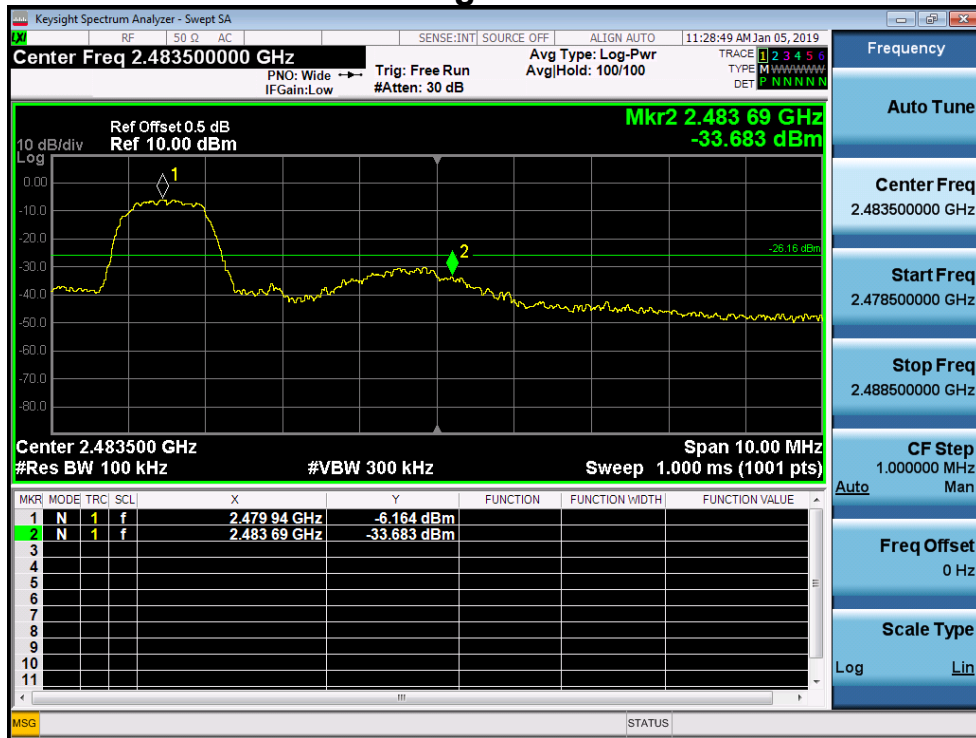

## **11. Antenna Application**

### **11.1 Antenna requirement**

According to of FCC part 15C section 15.203 and 15.240:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Systems operating in the 2400-2483.5MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

### **11.2 Measurement Results**

The antenna is PCB antenna that no antenna other than furnished by the responsible party shall be used with the device, and the best case gain of the antenna is -0.347dBi, So, the antenna is consider meet the requirement.

## **12. Conducted Spurious Emissions**

### **12.1 Measurement Procedure**



Out of Band Conducted Spurious Emissions, FCC Rule 15.247(d):

The transmitter output is connected to spectrum analyzer. All spurious emission and up to the tenth harmonic was measured and they were found to be at least 20dB below the highest level of the desired power in the passband.



### **12.2. Measurement Results**

Please refer to following plots, the worst case (8DPSK) was shown.


## Lowest Channel

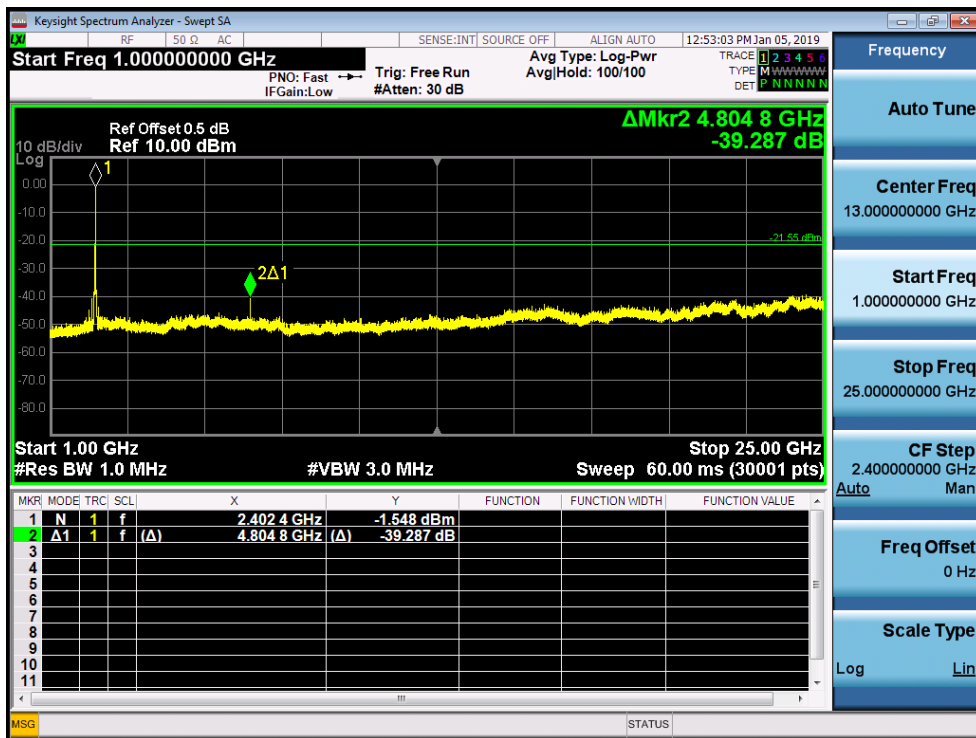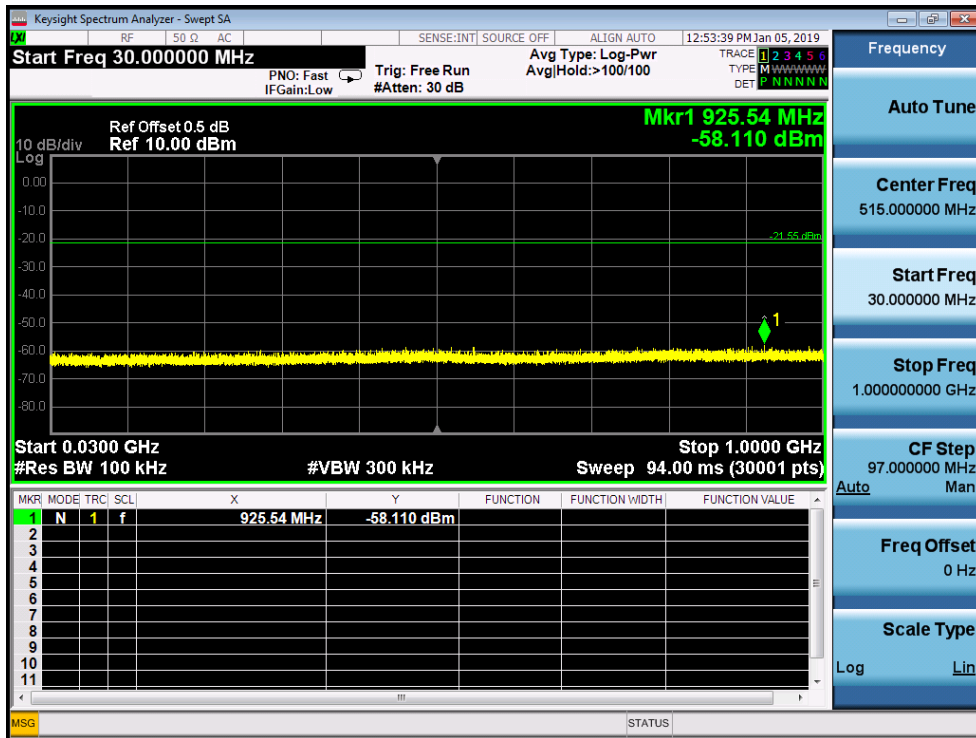

## Middle Channel

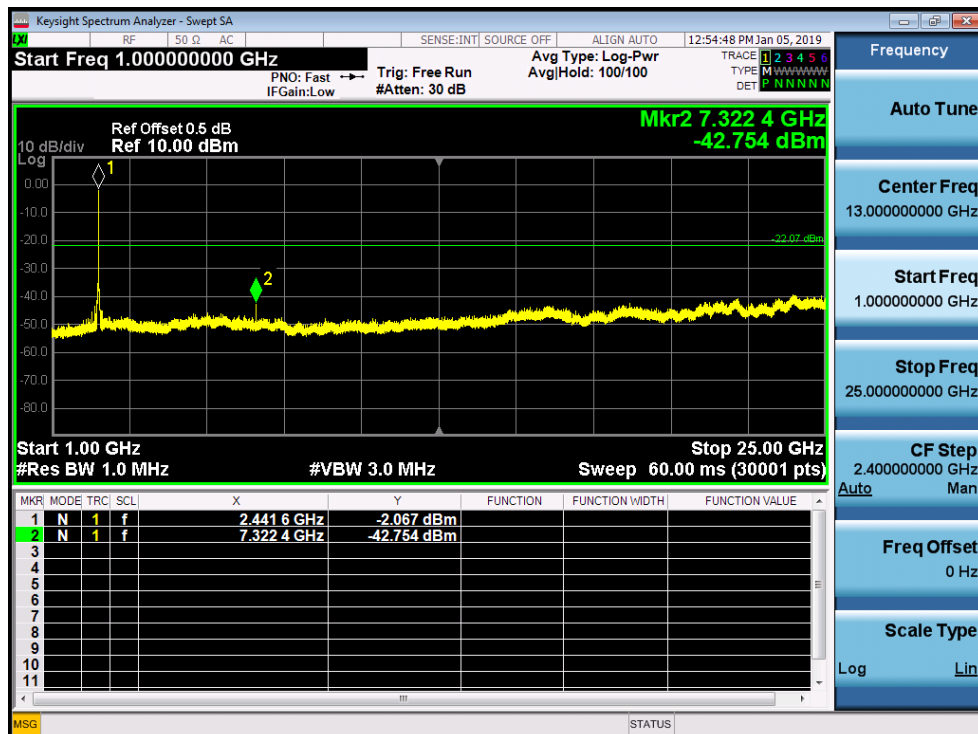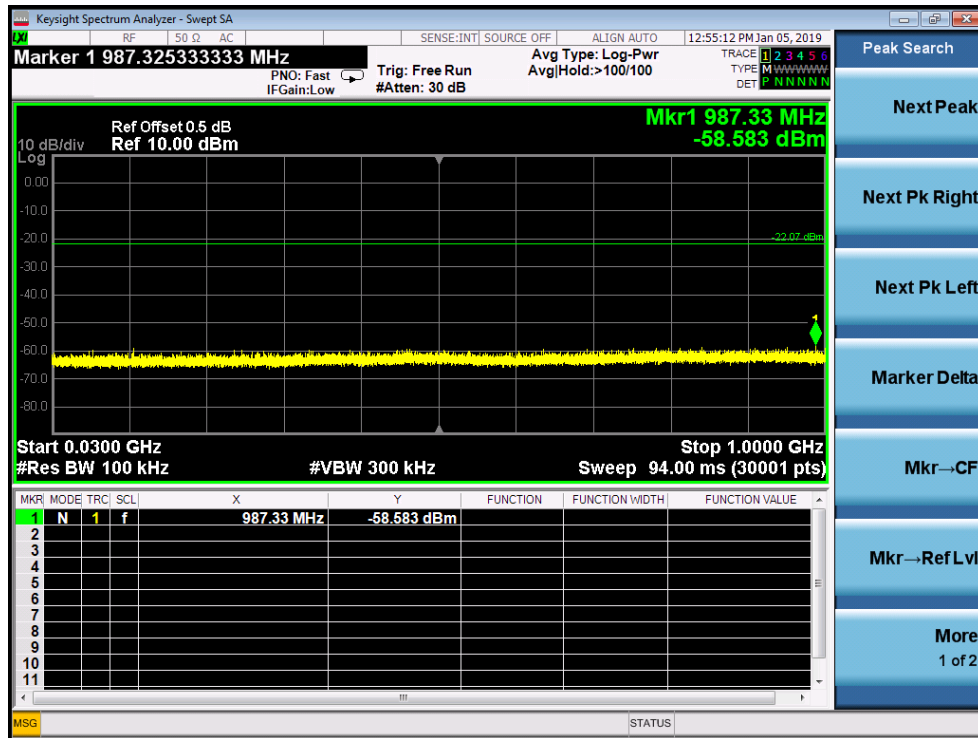

## Highest Channel

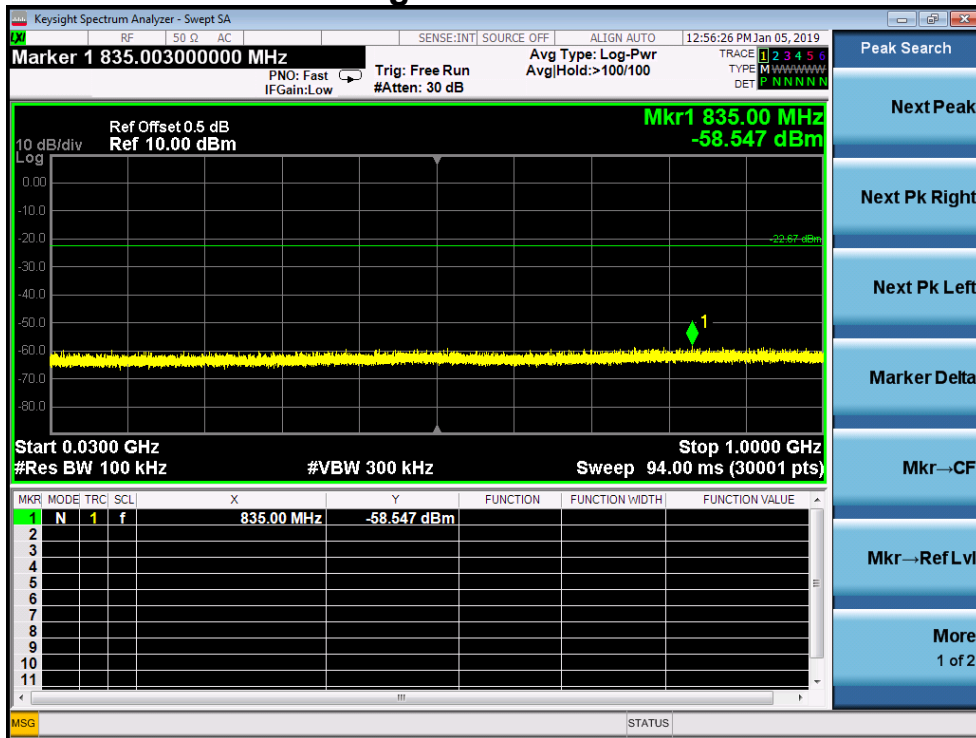

Note: Sweep points=30001pts

### 13. Test Equipment List

| No. | Equipment                      | Manufacturer                      | Model No.  | Serial No.    | Characteristics | Last Cal.     | Cal. Interval |
|-----|--------------------------------|-----------------------------------|------------|---------------|-----------------|---------------|---------------|
| 1.  | Test Receiver                  | Rohde & Schwarz                   | ESCI7      | 100837        | 9KHz~7GHz       | Mar. 14, 2018 | Mar. 13, 2019 |
| 2.  | Antenna                        | Schwarzbeck                       | VULB9162   | 9162-010      | 30MHz~7GHz      | Mar. 23, 2018 | Mar. 22, 2019 |
| 3.  | Spectrum Analyzer              | Rohde & Schwarz                   | FSU26      | 200409/026    | 20Hz~26.5GHz    | Mar. 14, 2018 | Mar. 13, 2019 |
| 4.  | Spectrum Analyzer              | Keysight                          | N9020A     | MY54200831    | 20Hz~26.5GHz    | Apr. 24, 2018 | Apr. 23, 2019 |
| 5.  | Spectrum Analyzer              | Rohde & Schwarz                   | FSV40      | 101003        | 10Hz~40GHz      | Apr. 24, 2018 | Apr. 23, 2019 |
| 6.  | Horn Antenna                   | Schwarzbeck                       | BBHA9170   | 9170-372      | 15GHz~40GHz     | Mar. 23, 2018 | Mar. 22, 2019 |
| 7.  | Pre-Amplifier                  | EMCI                              | EMC 184045 | 980102        | 18GHz~40GHz     | Apr. 24, 2018 | Apr. 23, 2019 |
| 8.  | Power Sensor                   | DARE                              | RPR3006W   | 15I00041SN064 | 100MHz~6GHz     | Mar. 14, 2018 | Mar. 13, 2019 |
| 9.  | Communication Tester           | Rohde & Schwarz                   | CMW500     | 149004        | 70MHz~6GHz      | Mar. 14, 2018 | Mar. 13, 2019 |
| 10. | Horn Antenna                   | COM-Power                         | AH-118     | 071078        | 500MHz~18GHz    | Mar. 23, 2018 | Mar. 22, 2019 |
| 11. | Pre-Amplifier                  | HP                                | HP 8449B   | 3008A00964    | 1GHz~26.5GHz    | Mar. 14, 2018 | Mar. 13, 2019 |
| 12. | Pre-Amplifier                  | HP                                | HP 8447D   | 1145A00203    | 100KHz~1.3GHz   | Mar. 14, 2018 | Mar. 13, 2019 |
| 13. | Loop Antenna                   | Schwarzbeck                       | FMZB 1513  | 1513-272      | 9KHz~30MHz      | Apr. 24, 2018 | Apr. 23, 2019 |
| 14. | Temperature & Humidity Chamber | REMAFEE                           | SYHR225L   | N/A           | -40~150℃        | Apr. 24, 2018 | Apr. 23, 2019 |
| 15. | DC Source                      | MY                                | MY8811     | N/A           | 0~30V           | Mar. 23, 2018 | Mar. 22, 2019 |
| 16. | Temporary antenna connector    | TESCOM                            | SS402      | N/A           | 9KHz~25GHz      | N/A           | N/A           |
| 17. | Test Receiver                  | Rohde & Schwarz                   | ESCI       | 101152        | 9KHz~3GHz       | Mar. 14, 2018 | Mar. 13, 2019 |
| 18. | L.I.S.N                        | Rohde & Schwarz                   | ENV 216    | 101317        | N/A             | Mar. 14, 2018 | Mar. 13, 2019 |
| 19. | L.I.S.N                        | Schwarzbeck                       | NNLK8129   | 8129212       | N/A             | Mar. 07, 2018 | Mar. 06, 2019 |
| 20. | RF Switching Unit              | Compliance Direction Systems Inc. | RSU-M2     | 38311         | N/A             | Mar. 14, 2018 | Mar. 13, 2019 |
| 21. | Test Software                  | EZ                                | EZ_EMC     | N/A           | N/A             | N/A           | N/A           |

Note: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

---End---