






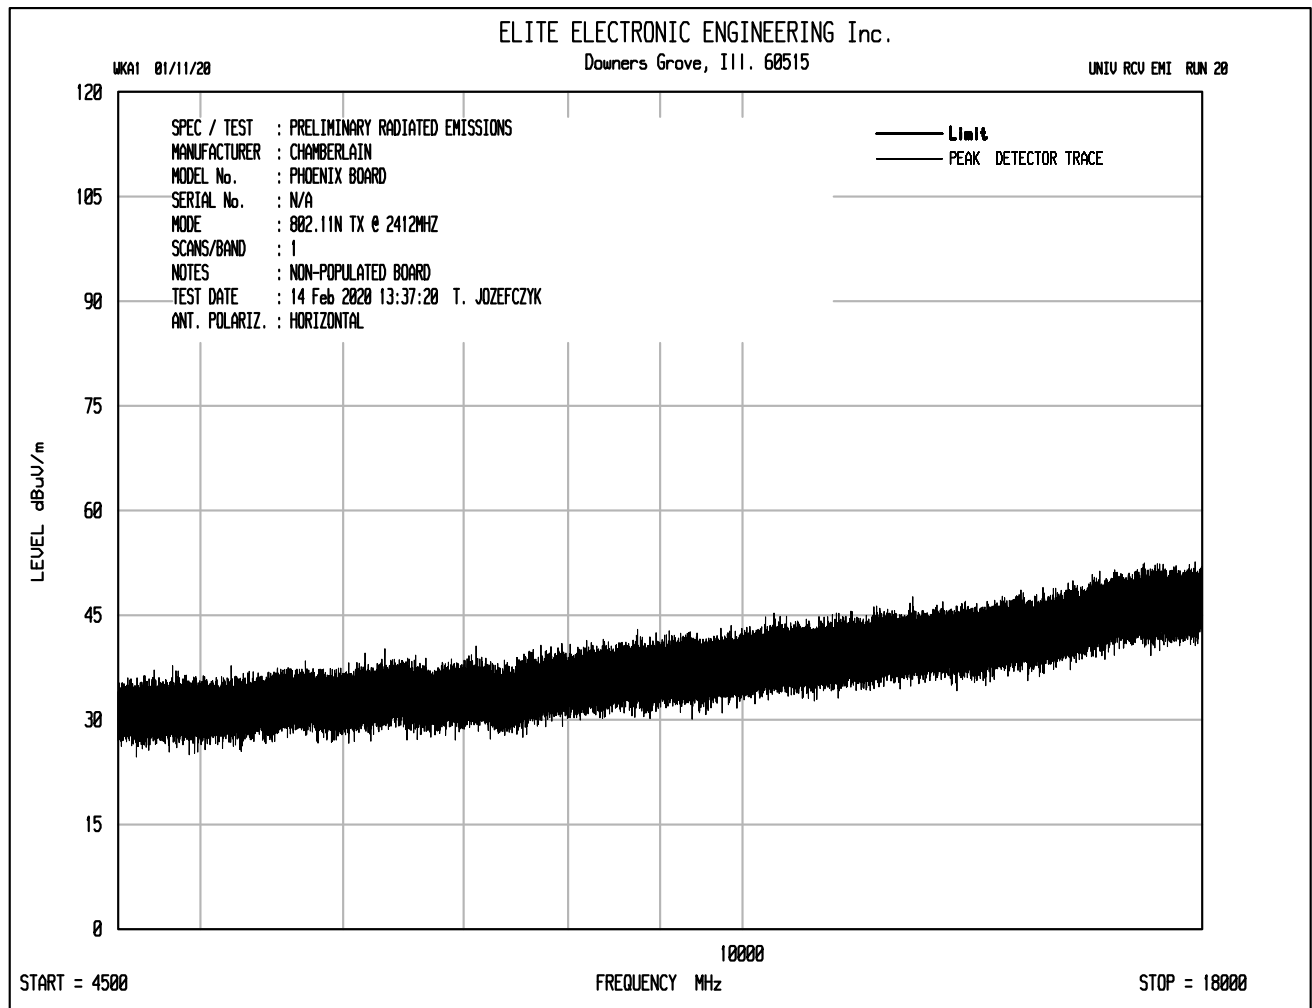


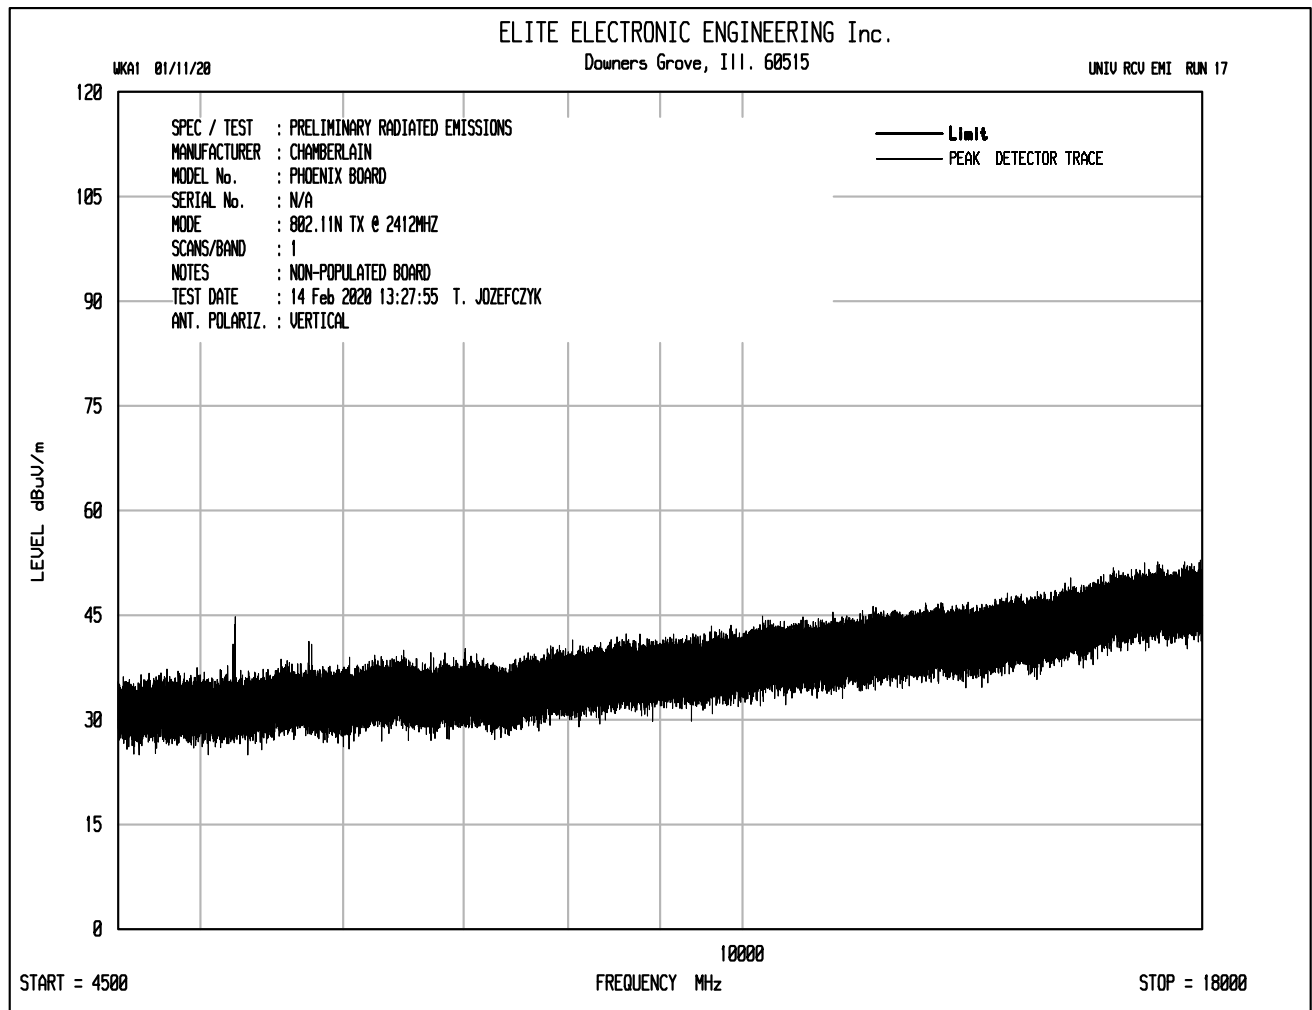


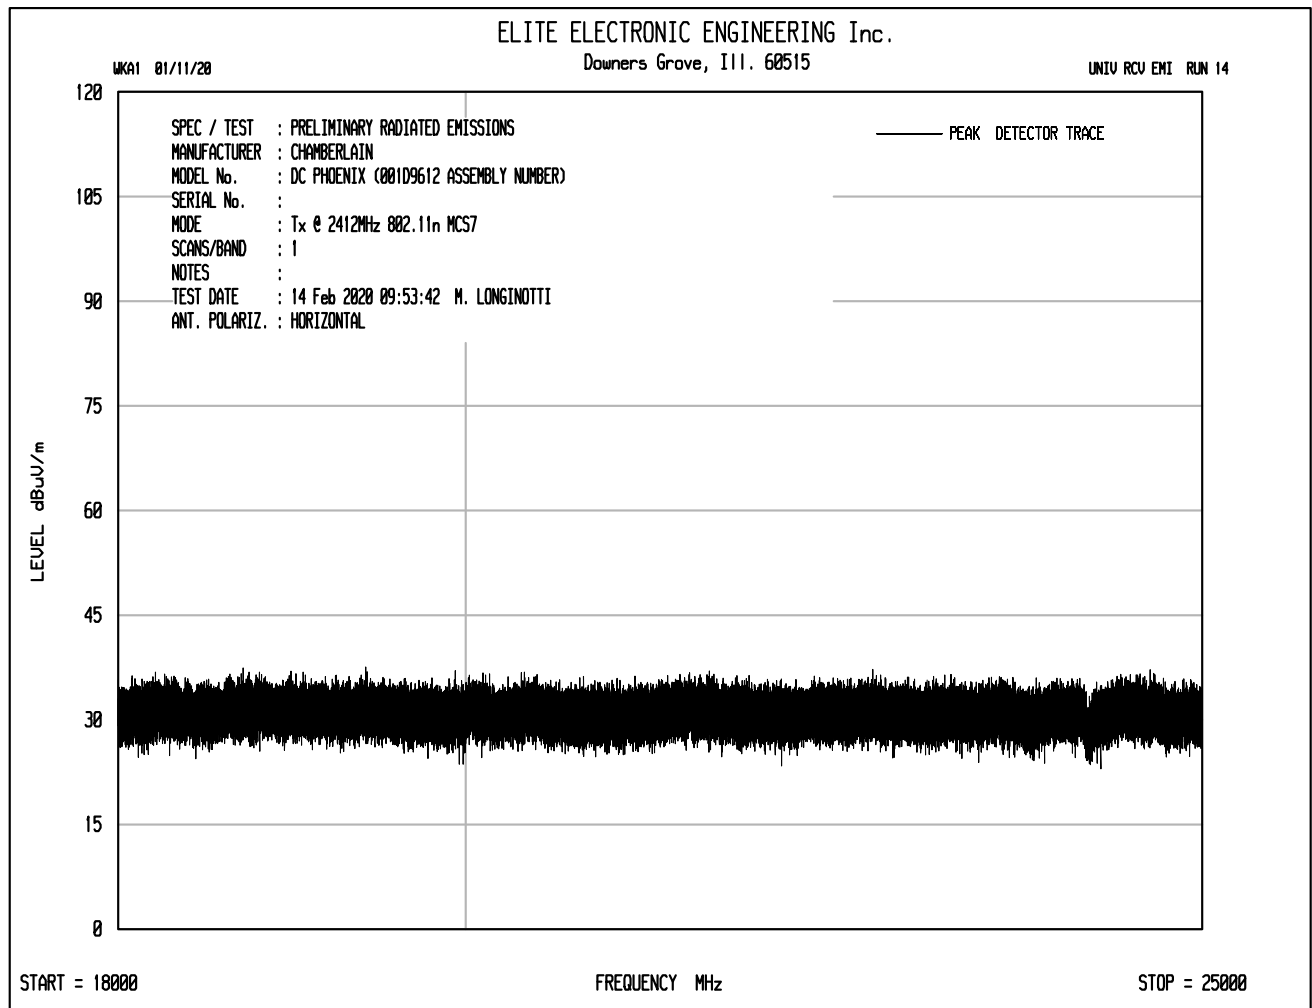


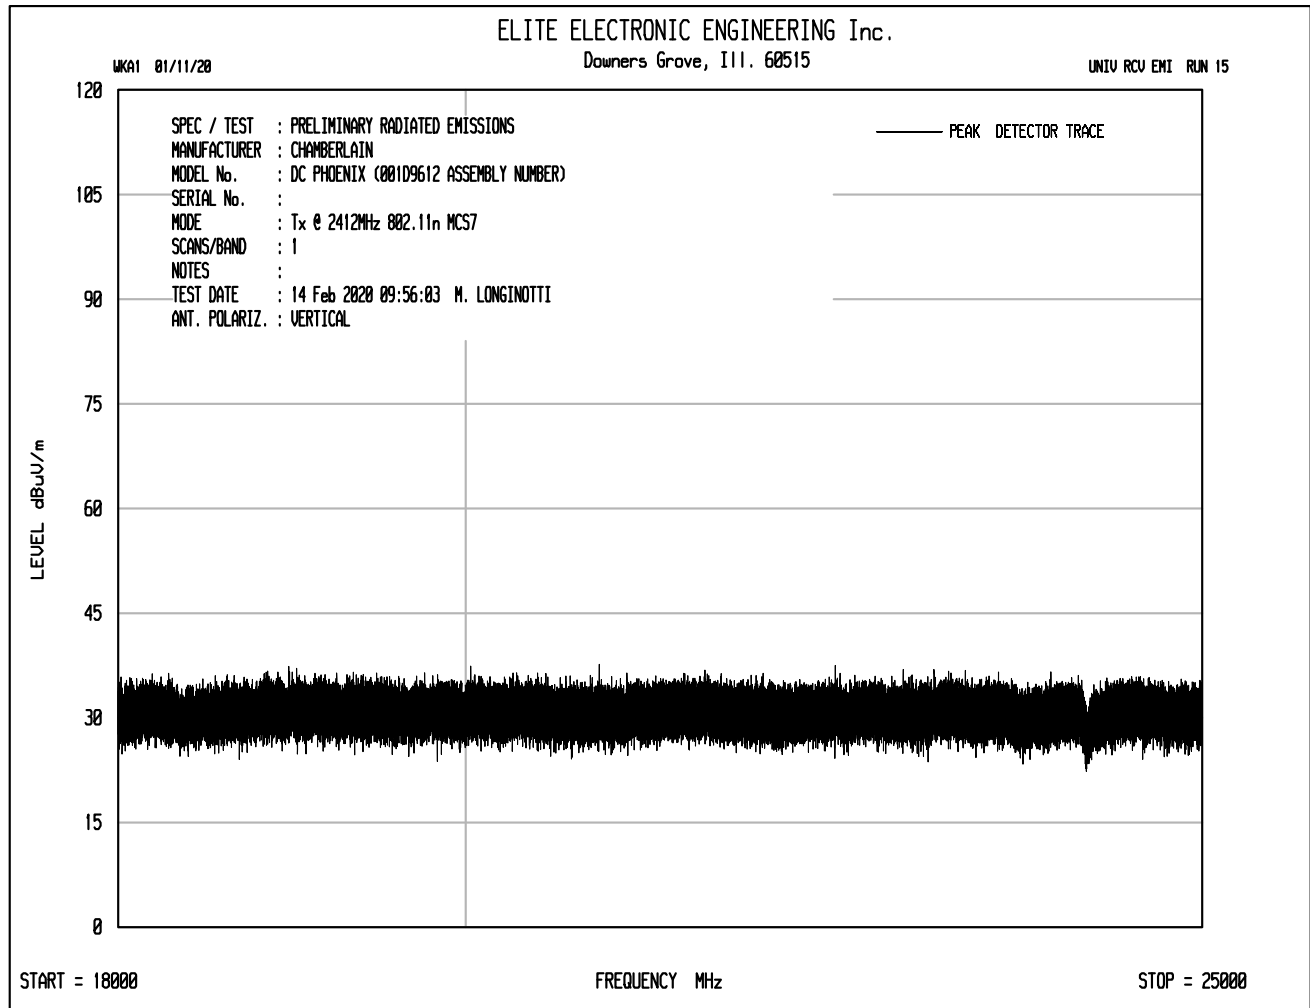


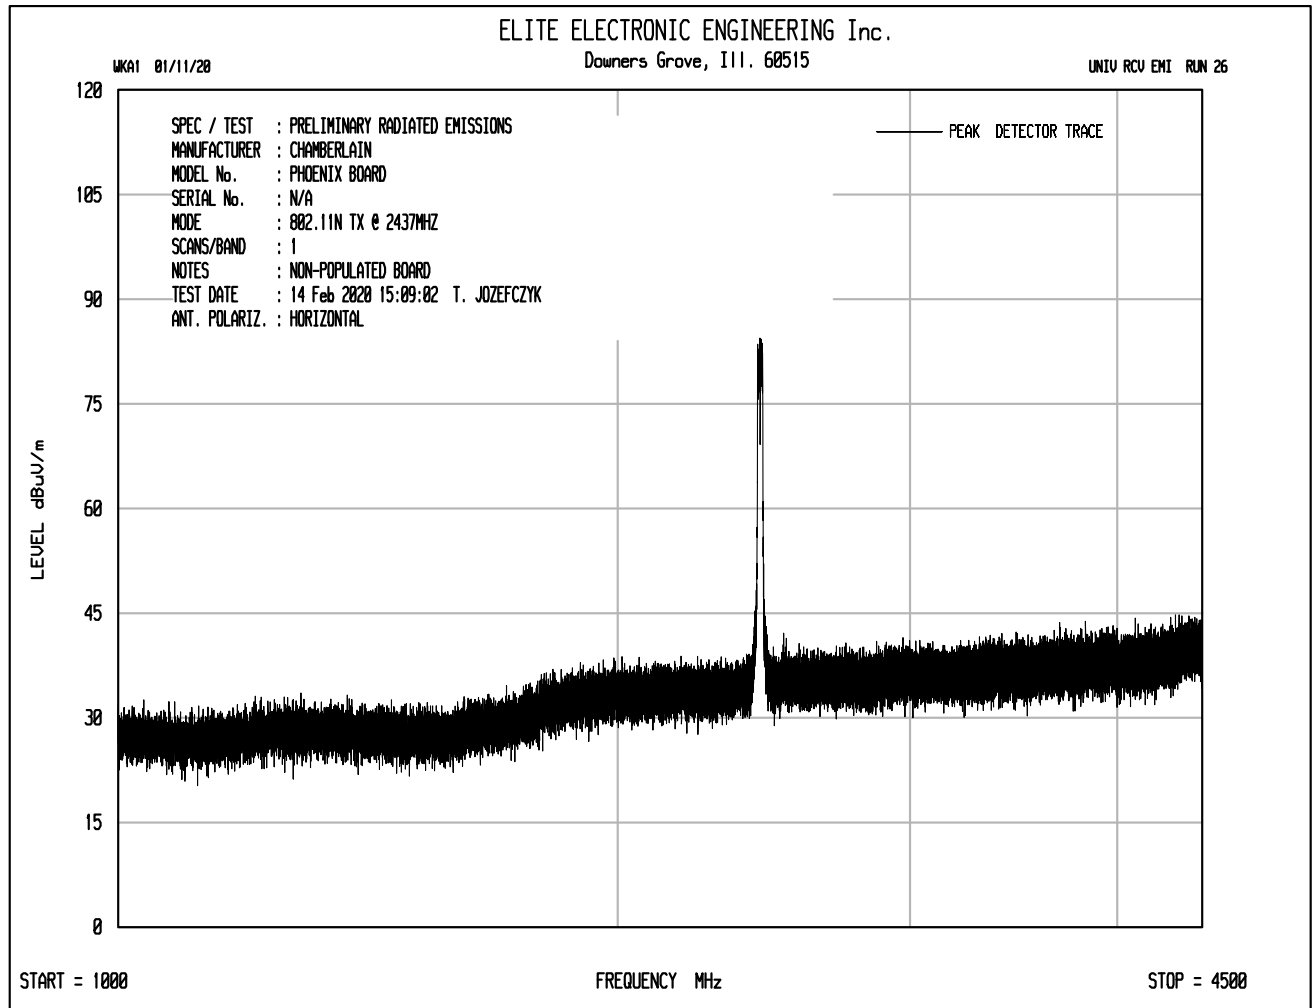


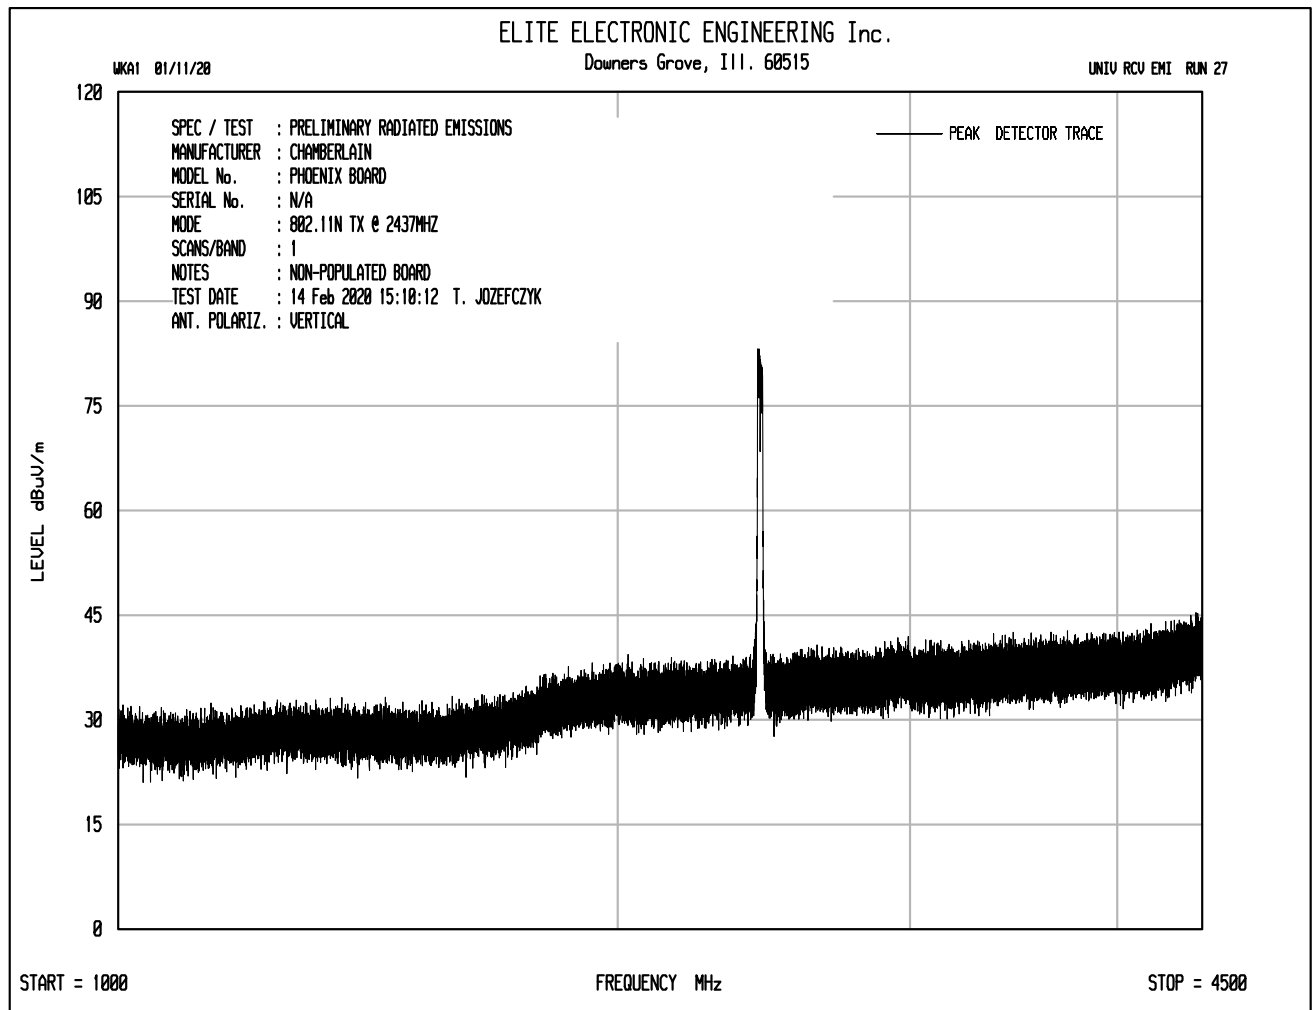


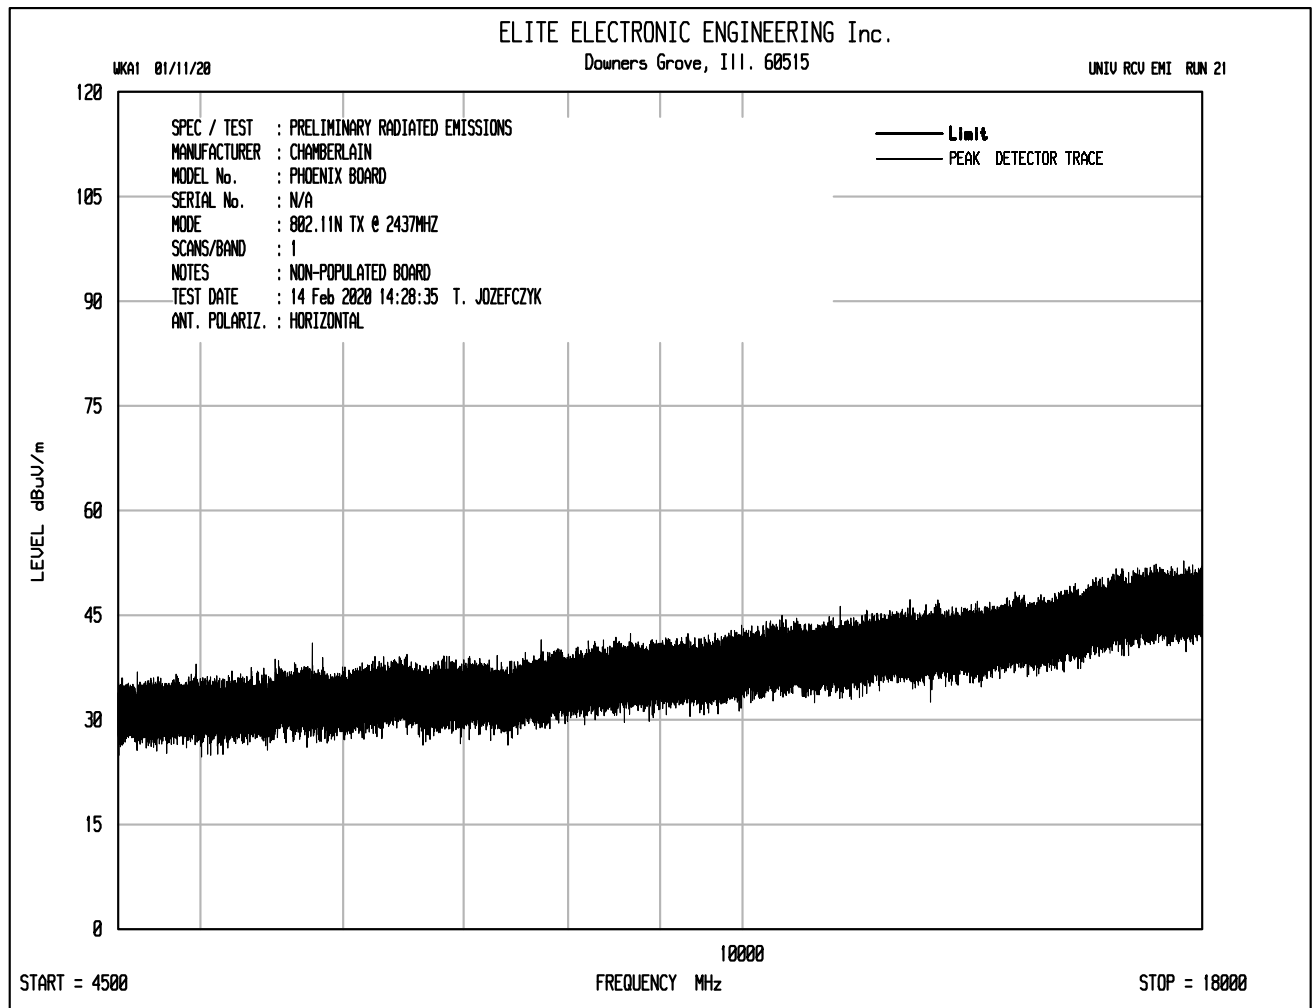


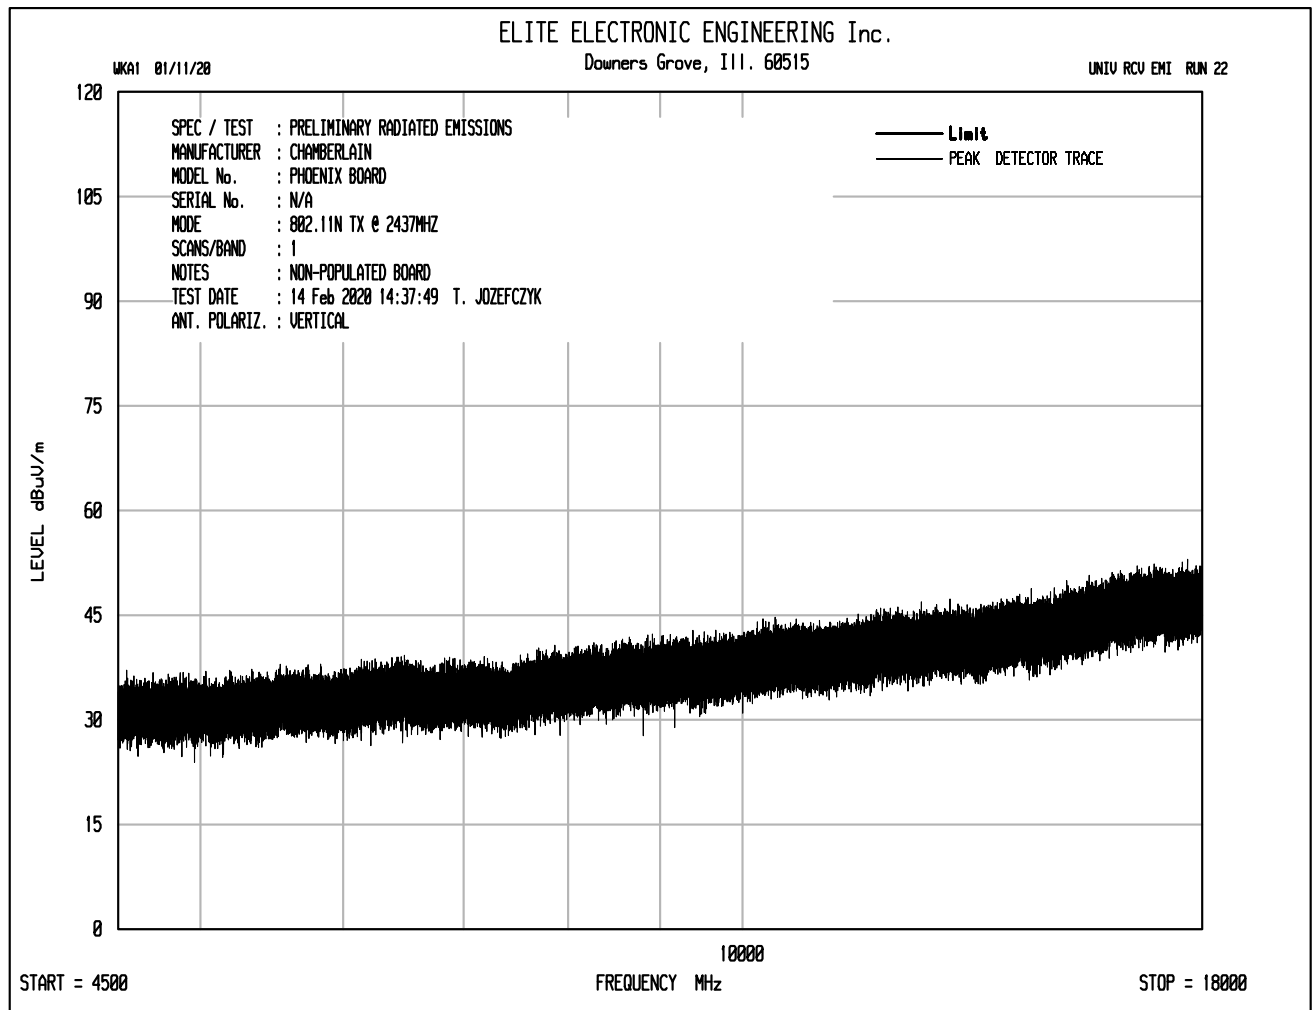


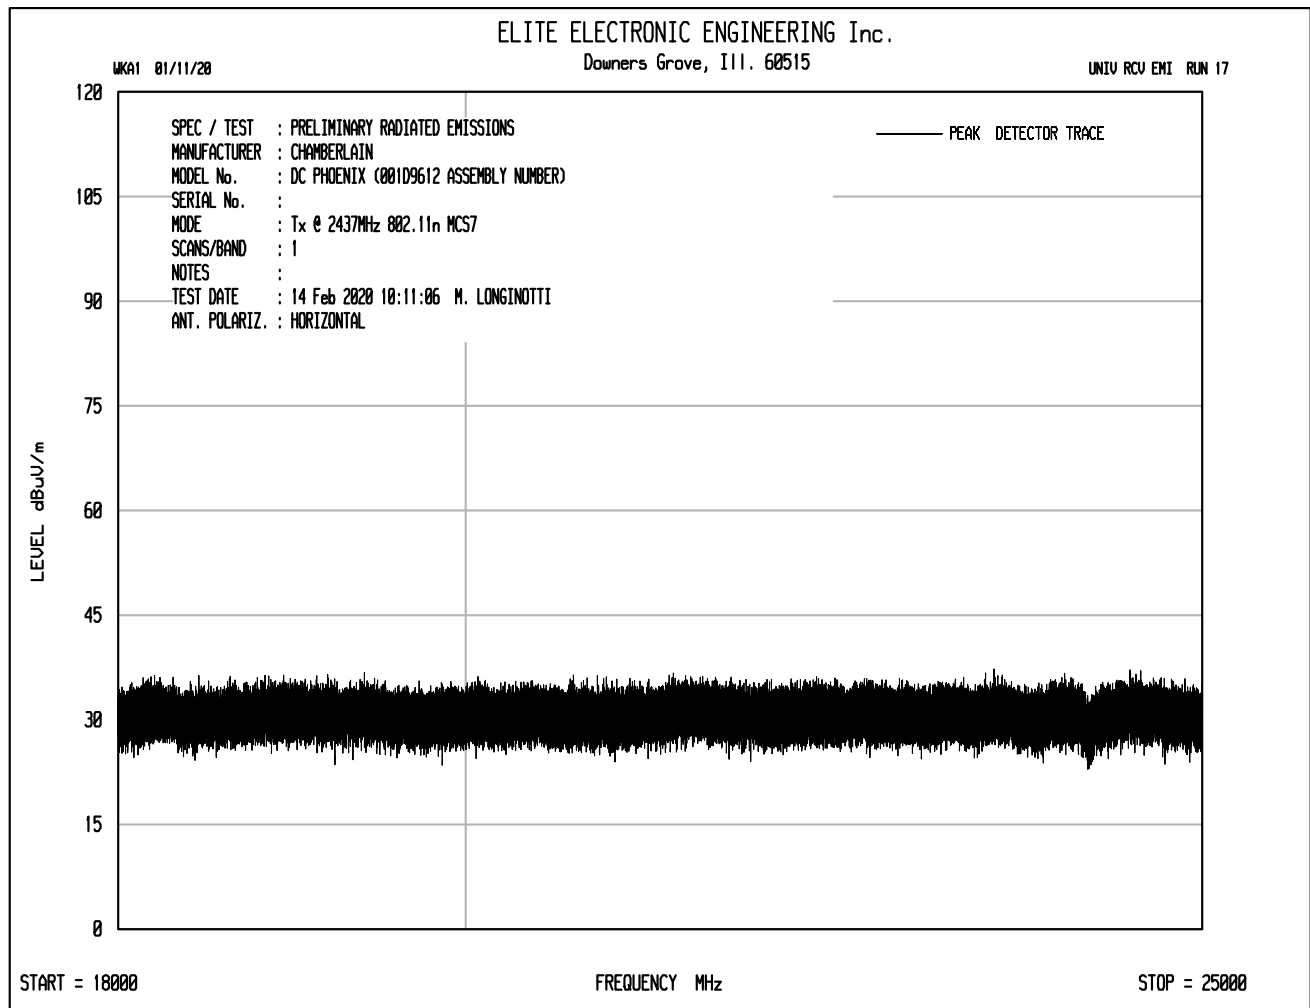


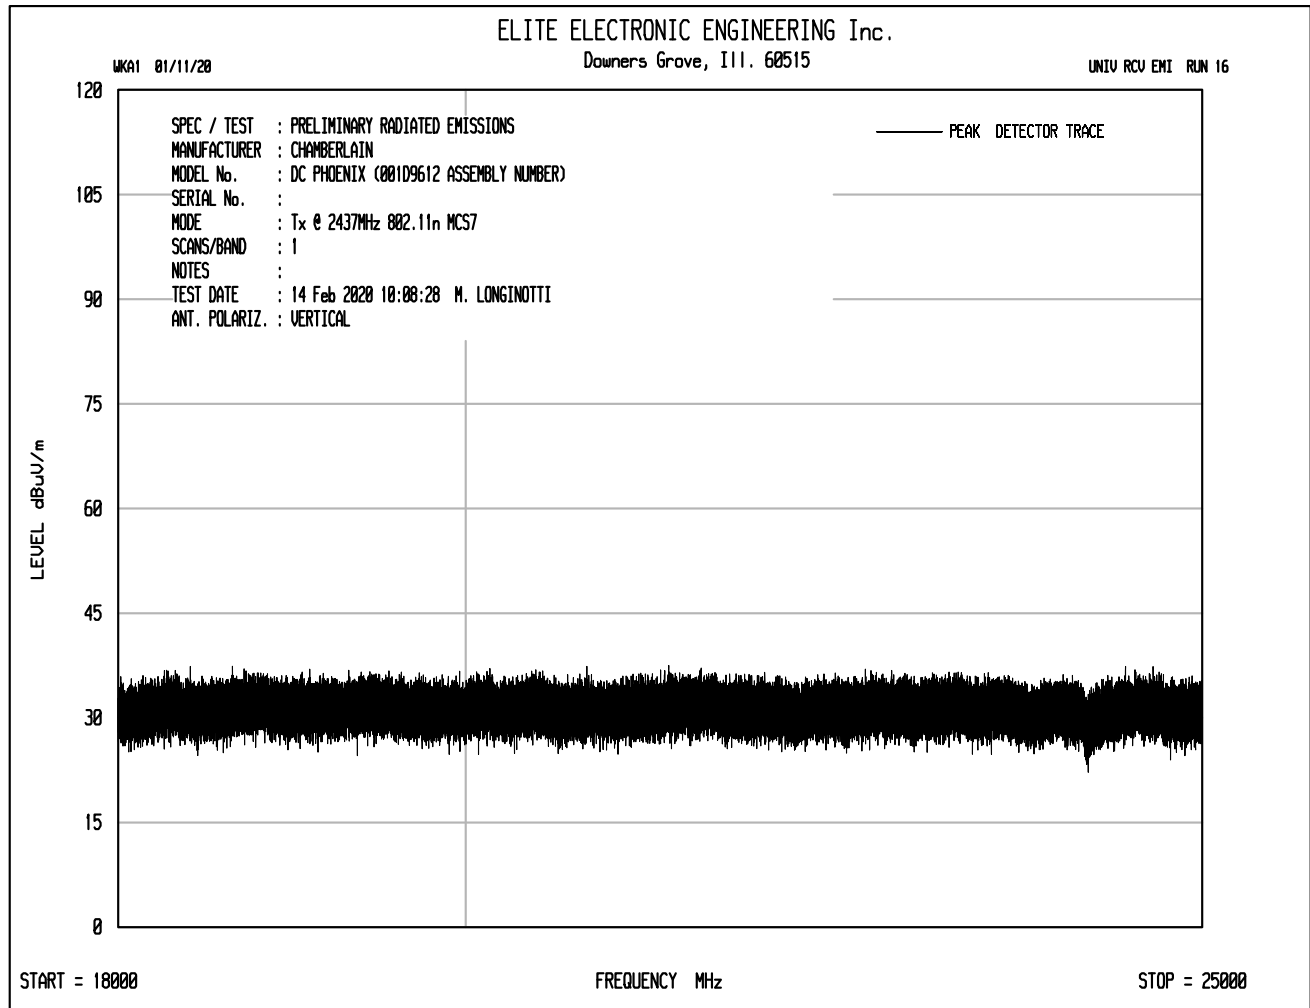


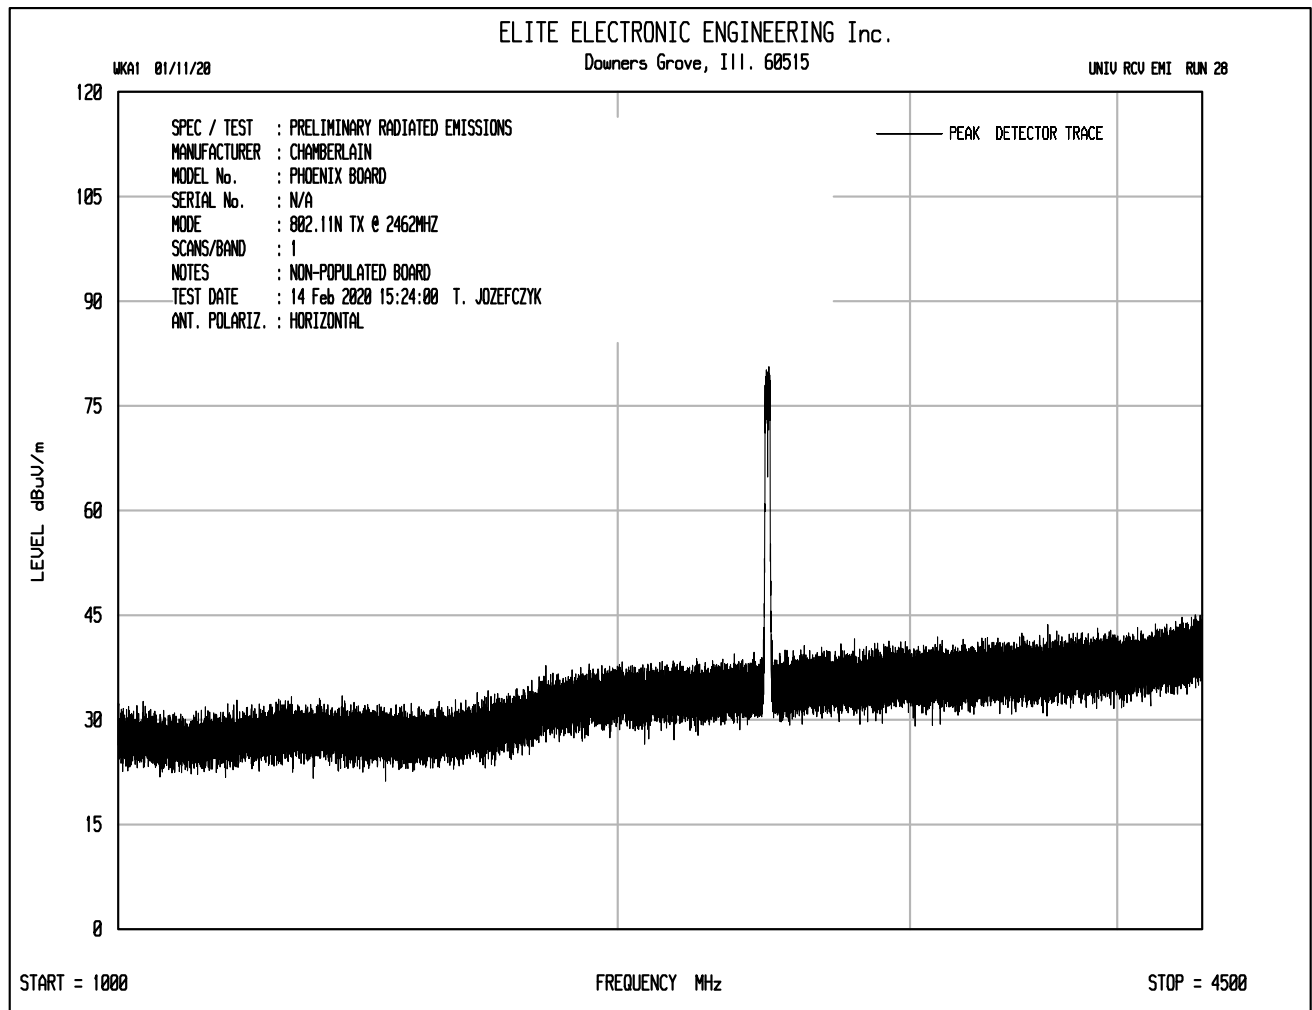


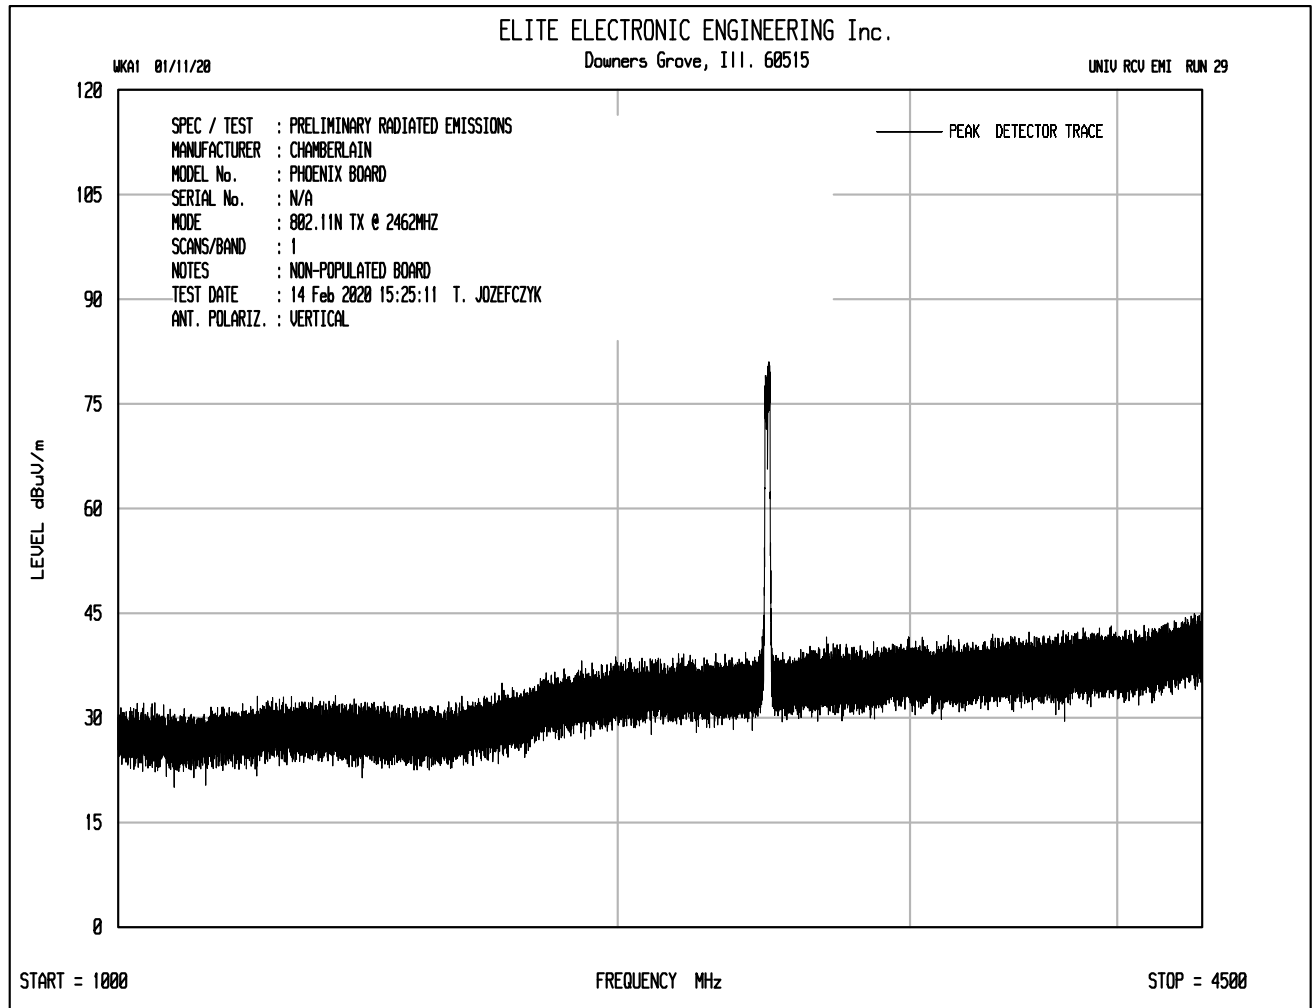


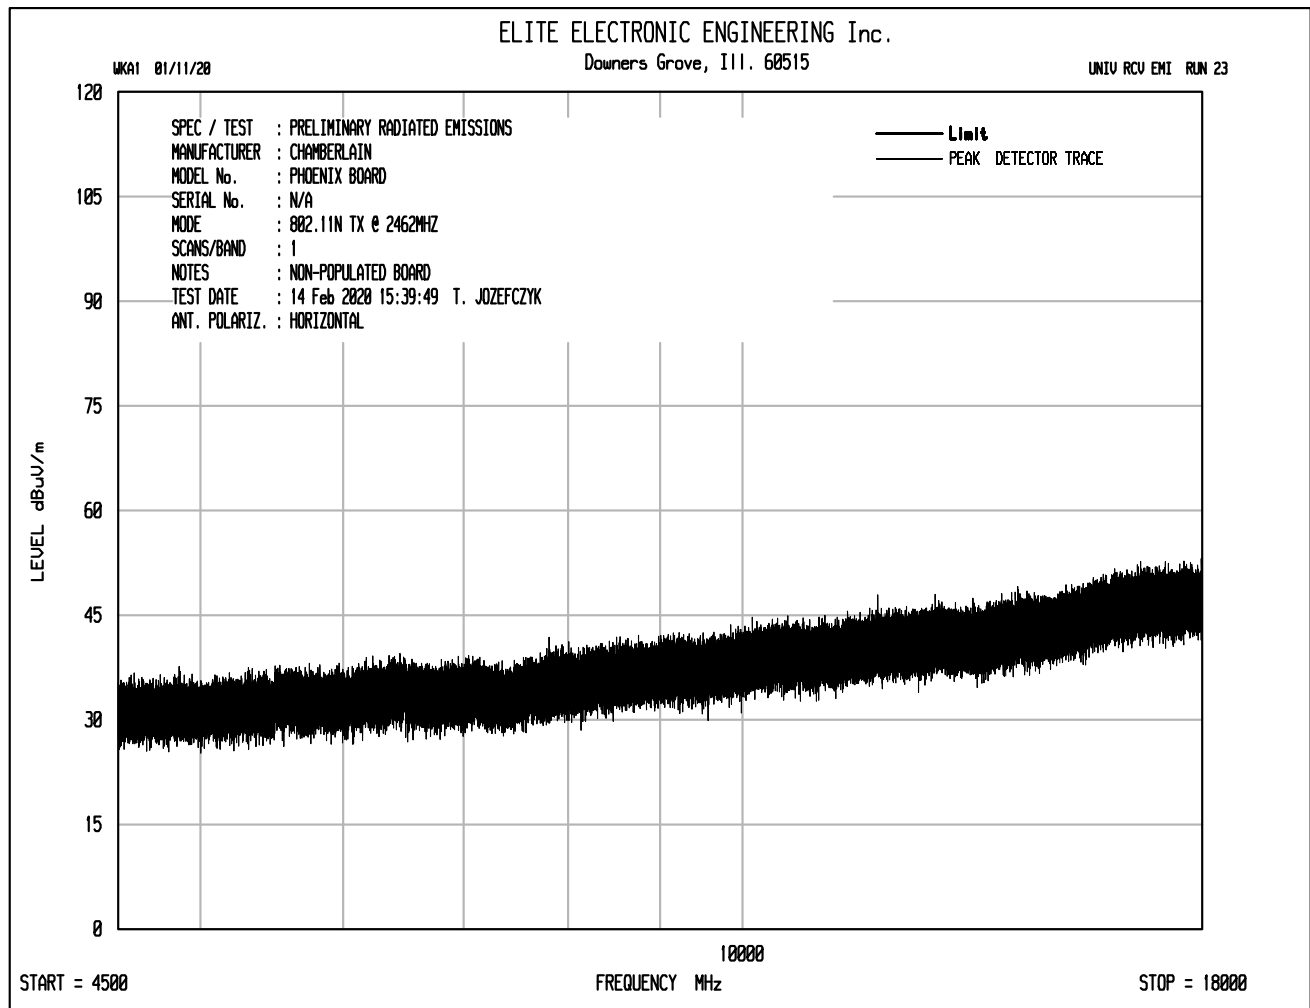


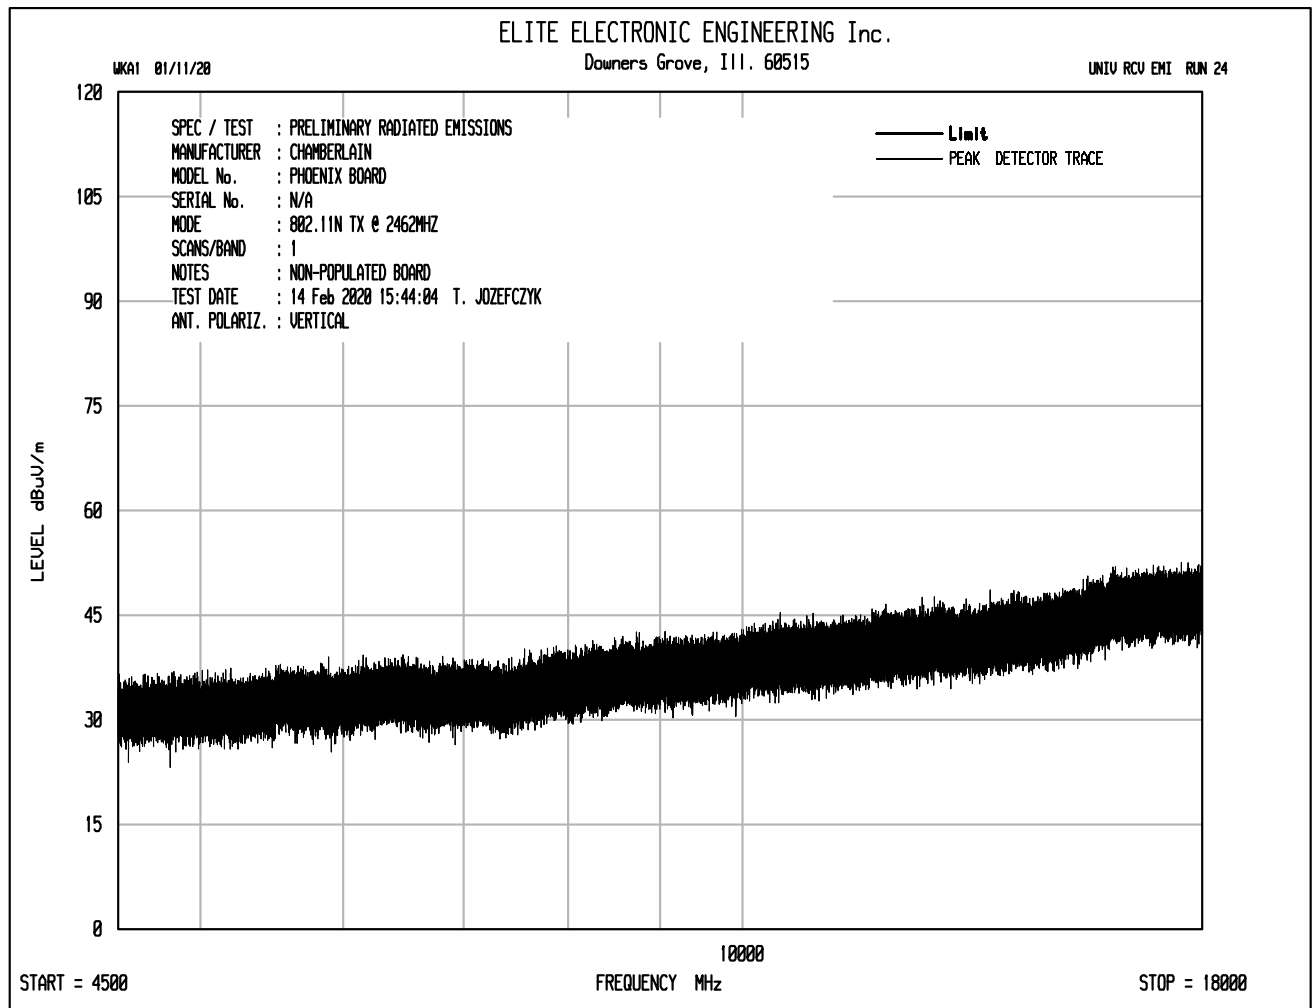


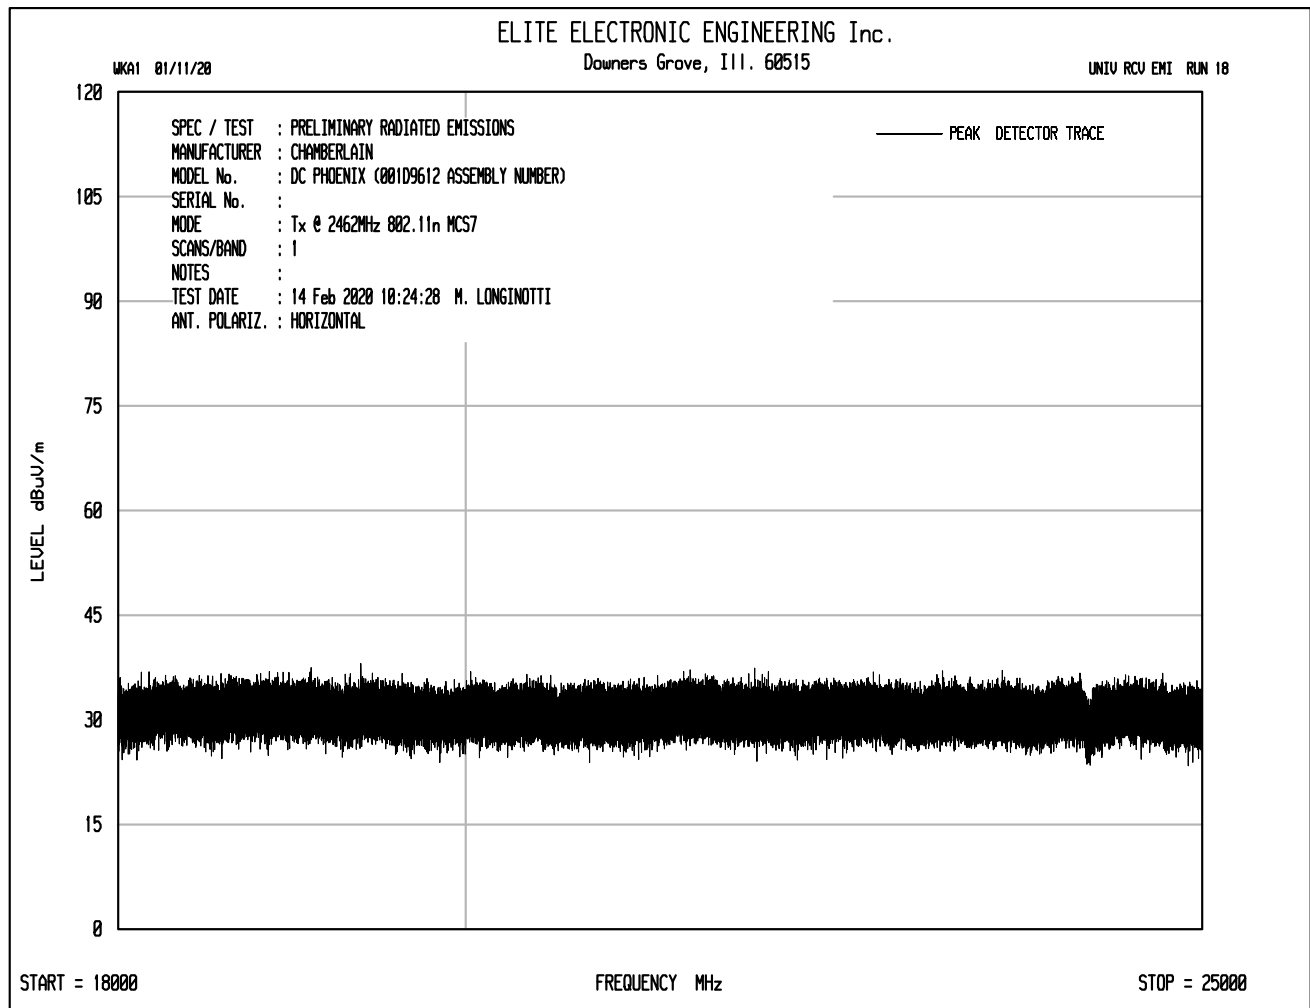


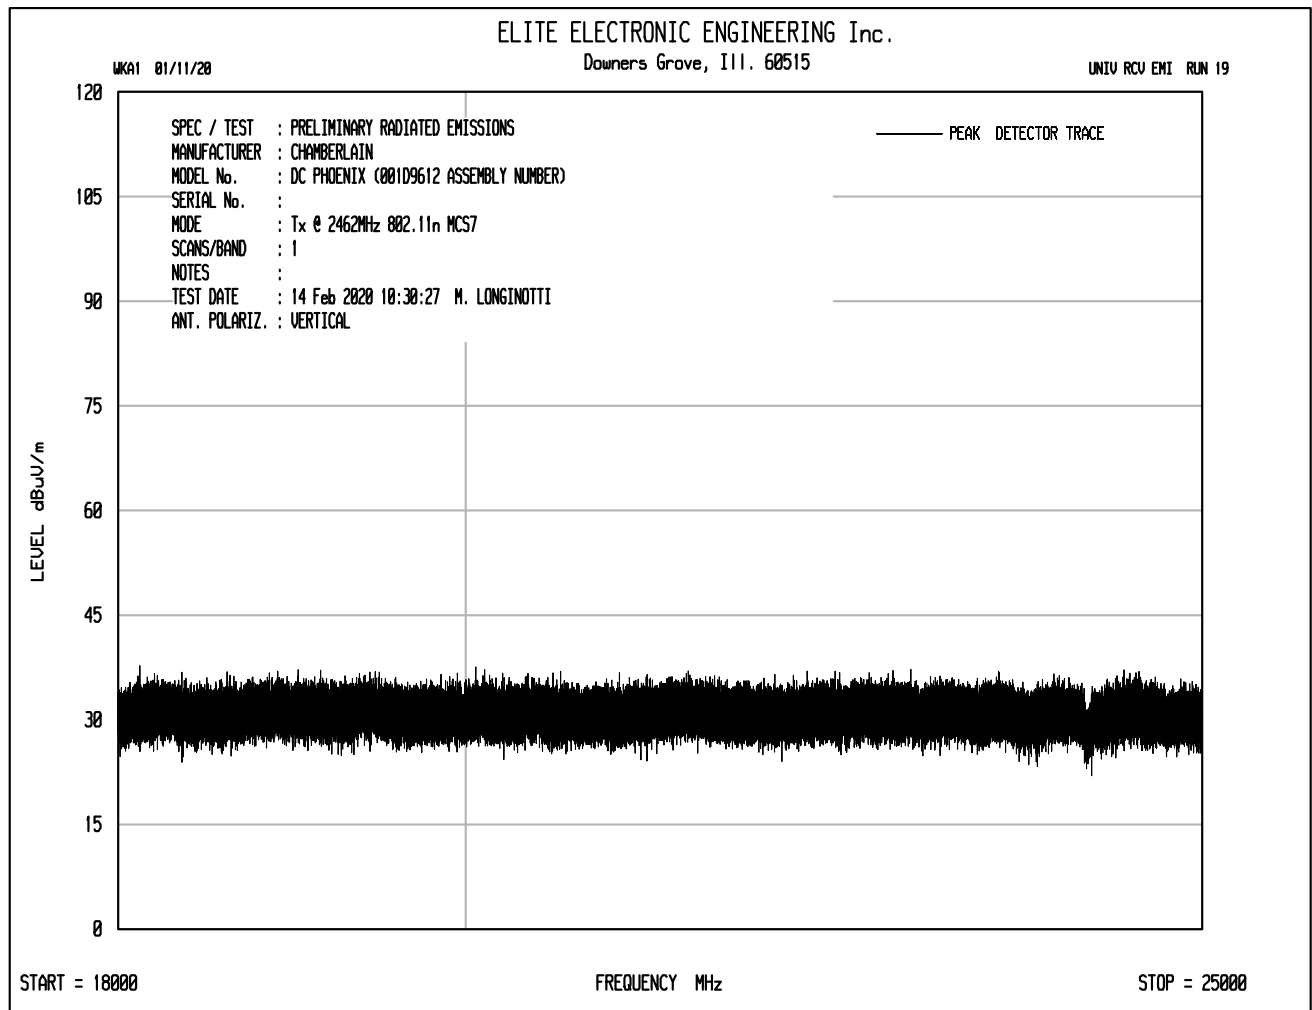


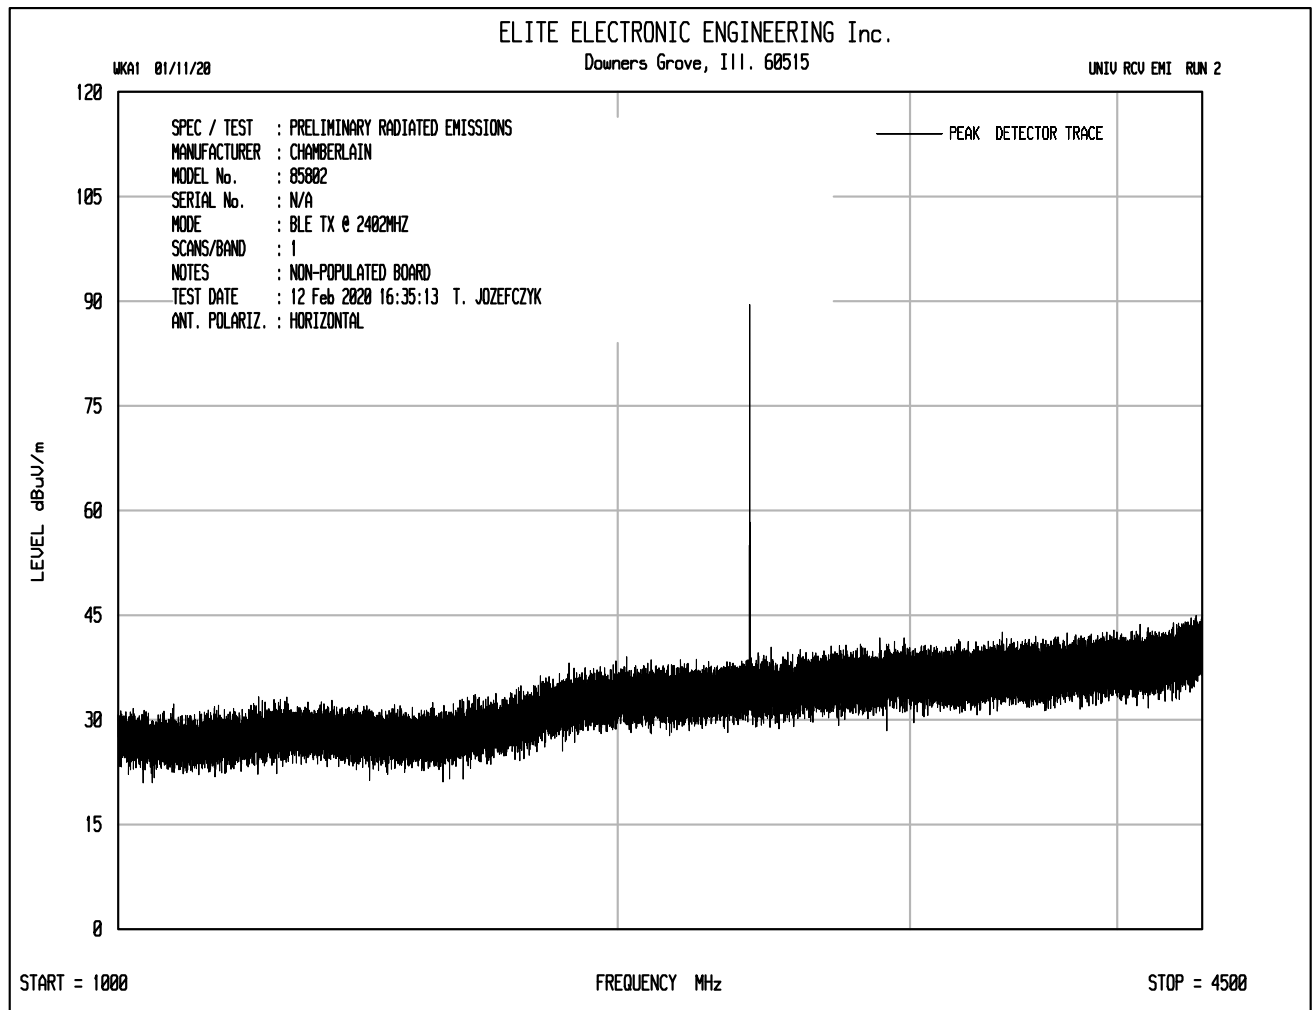


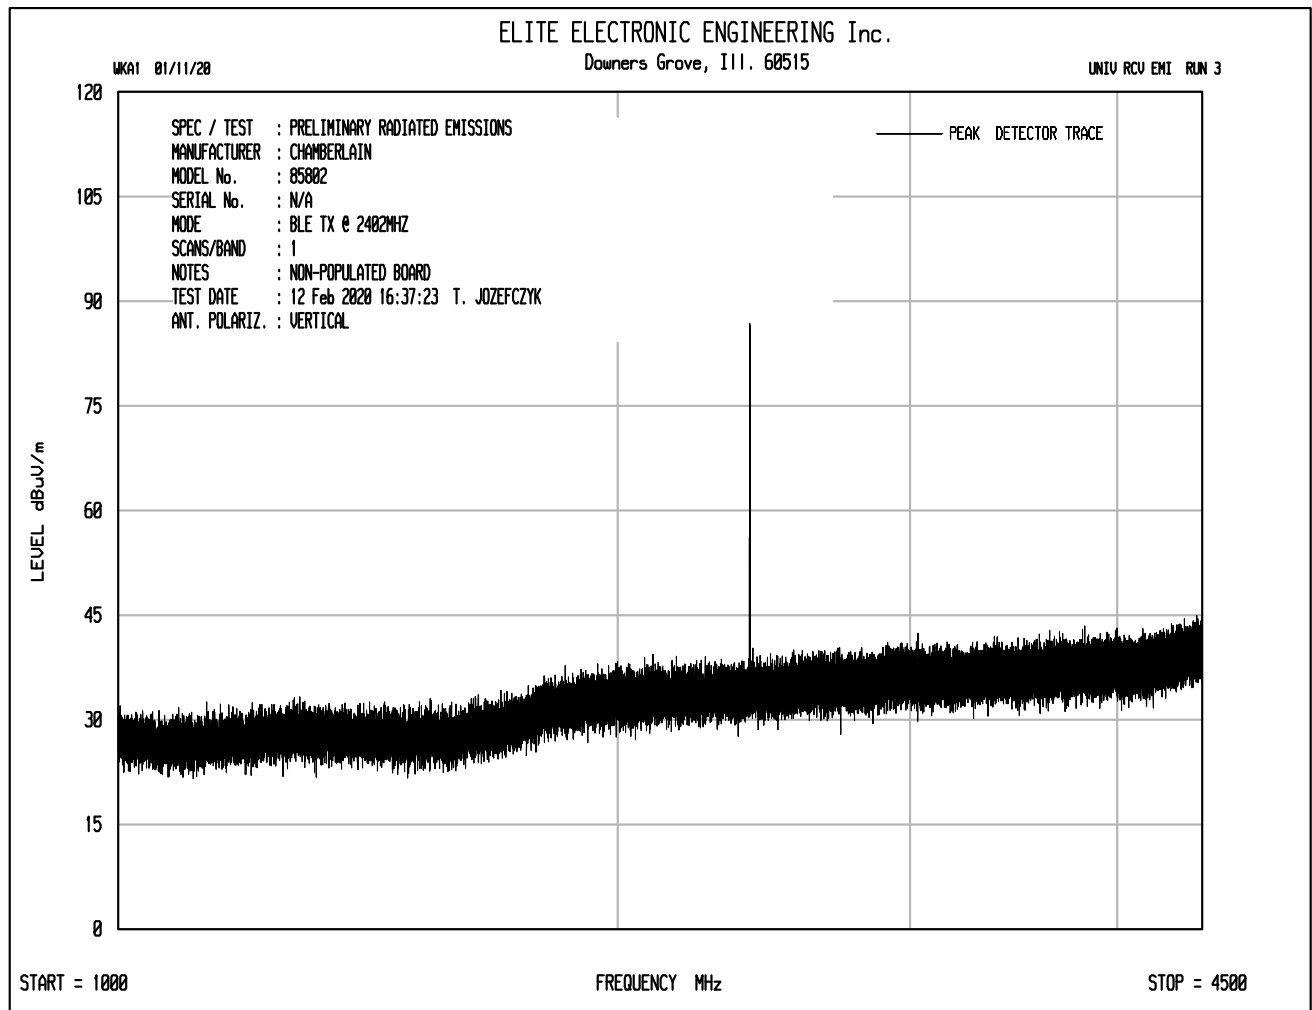


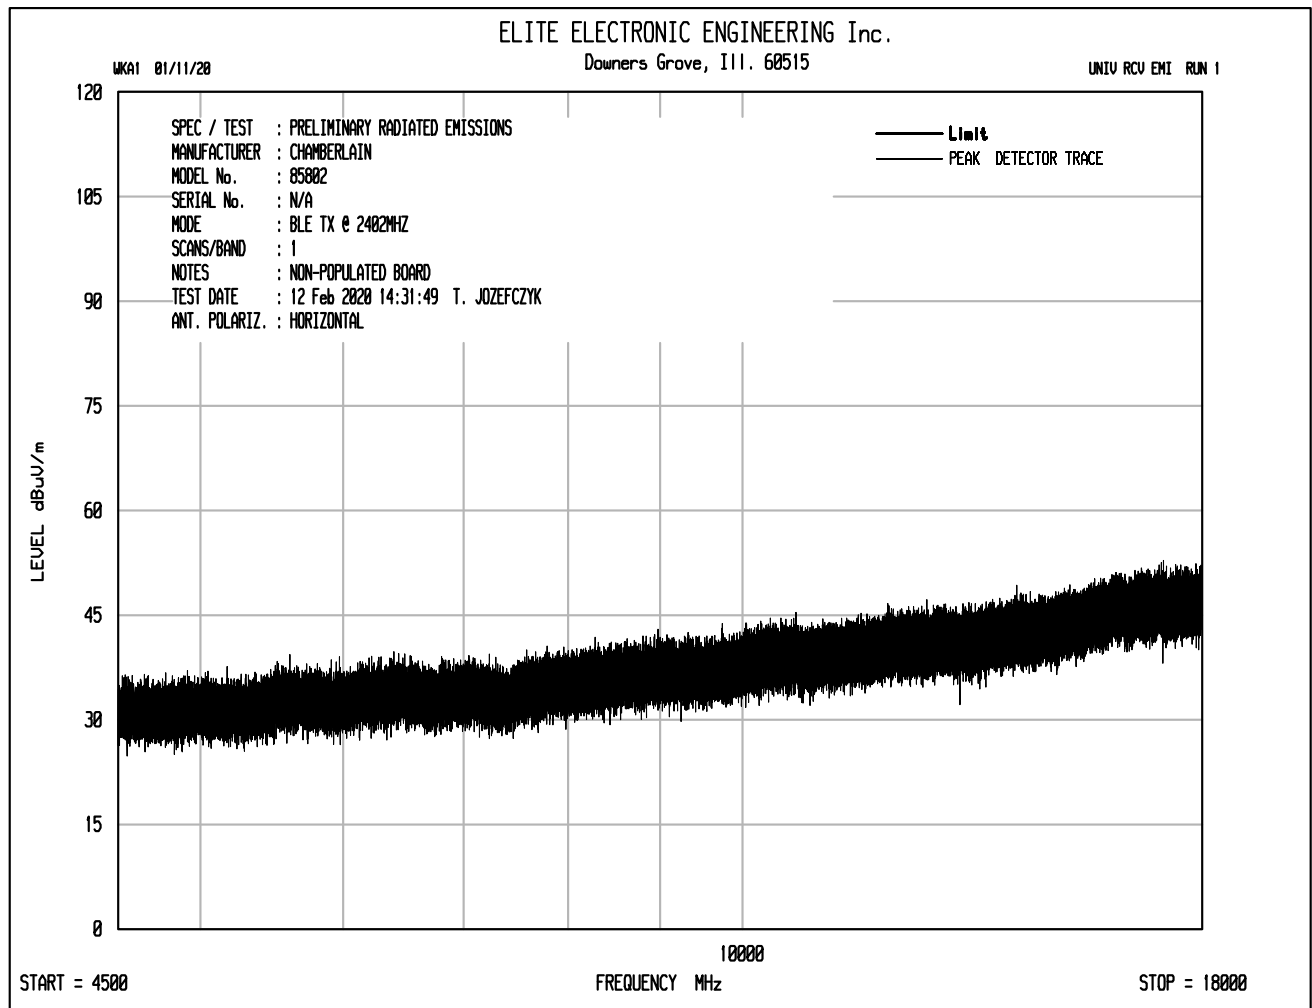


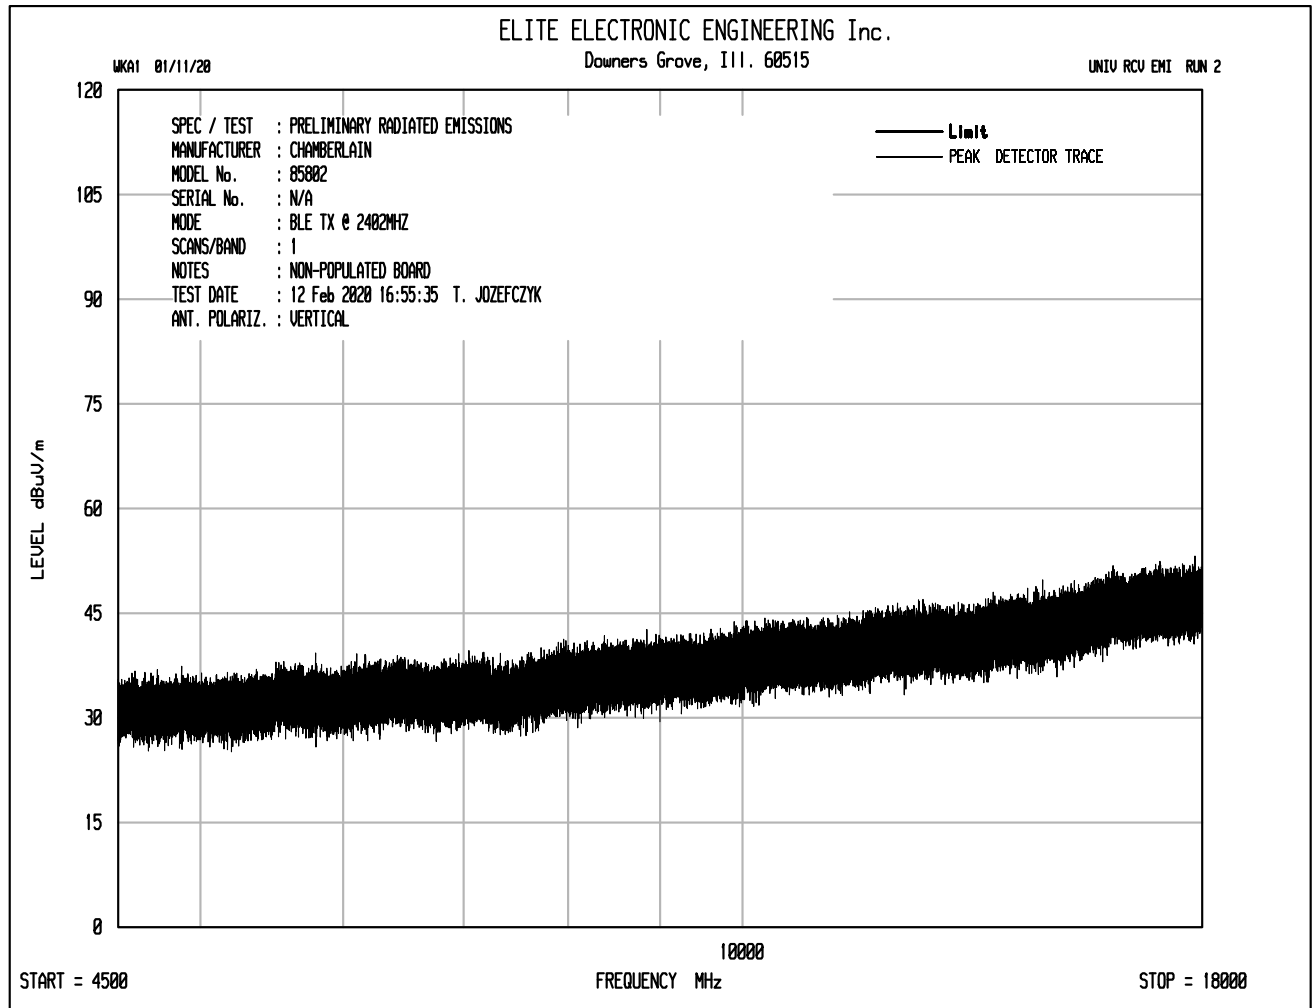


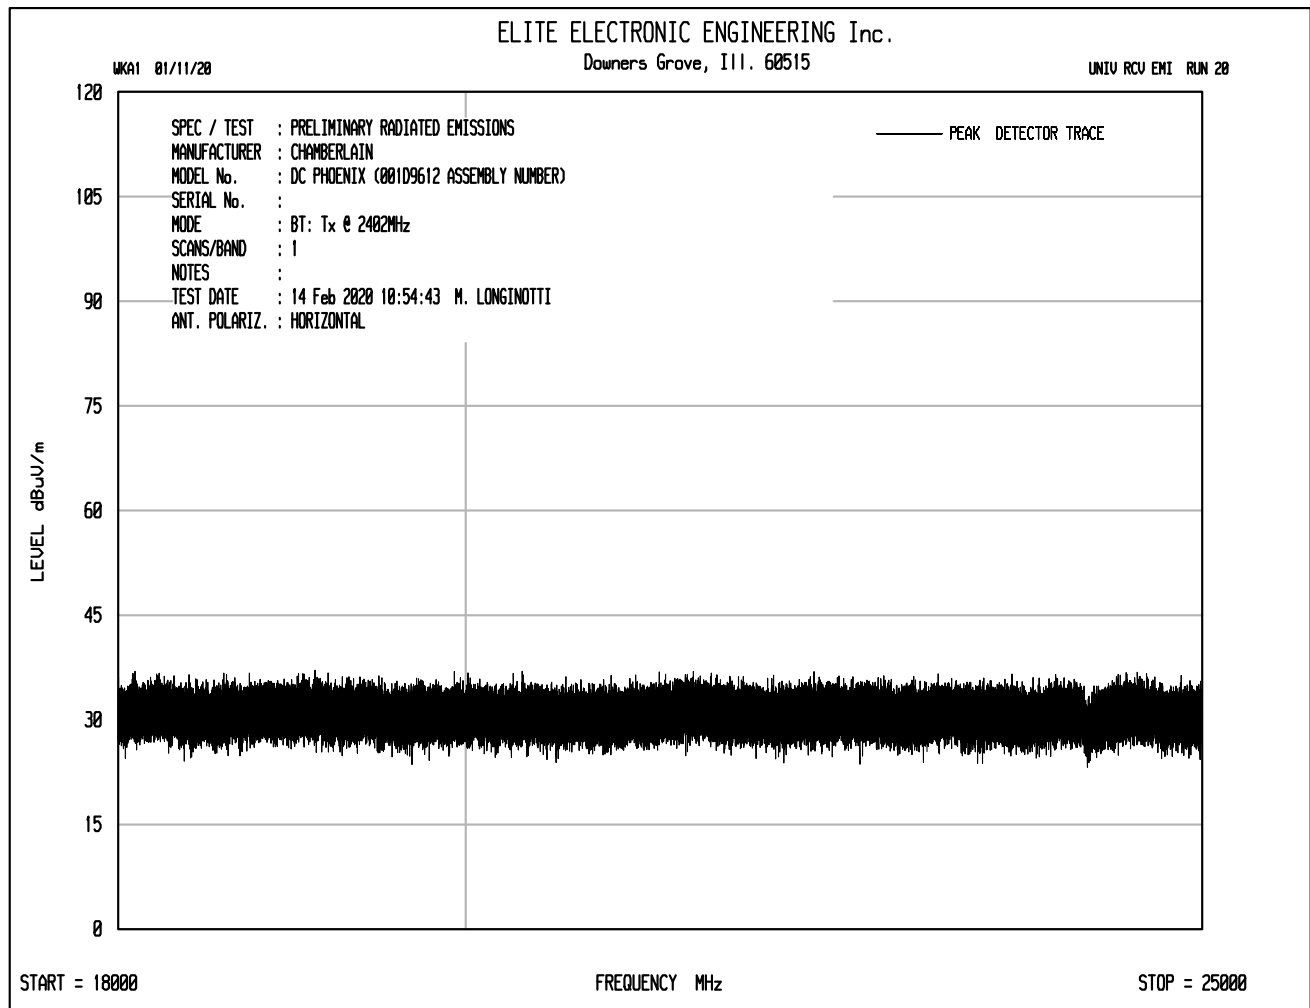


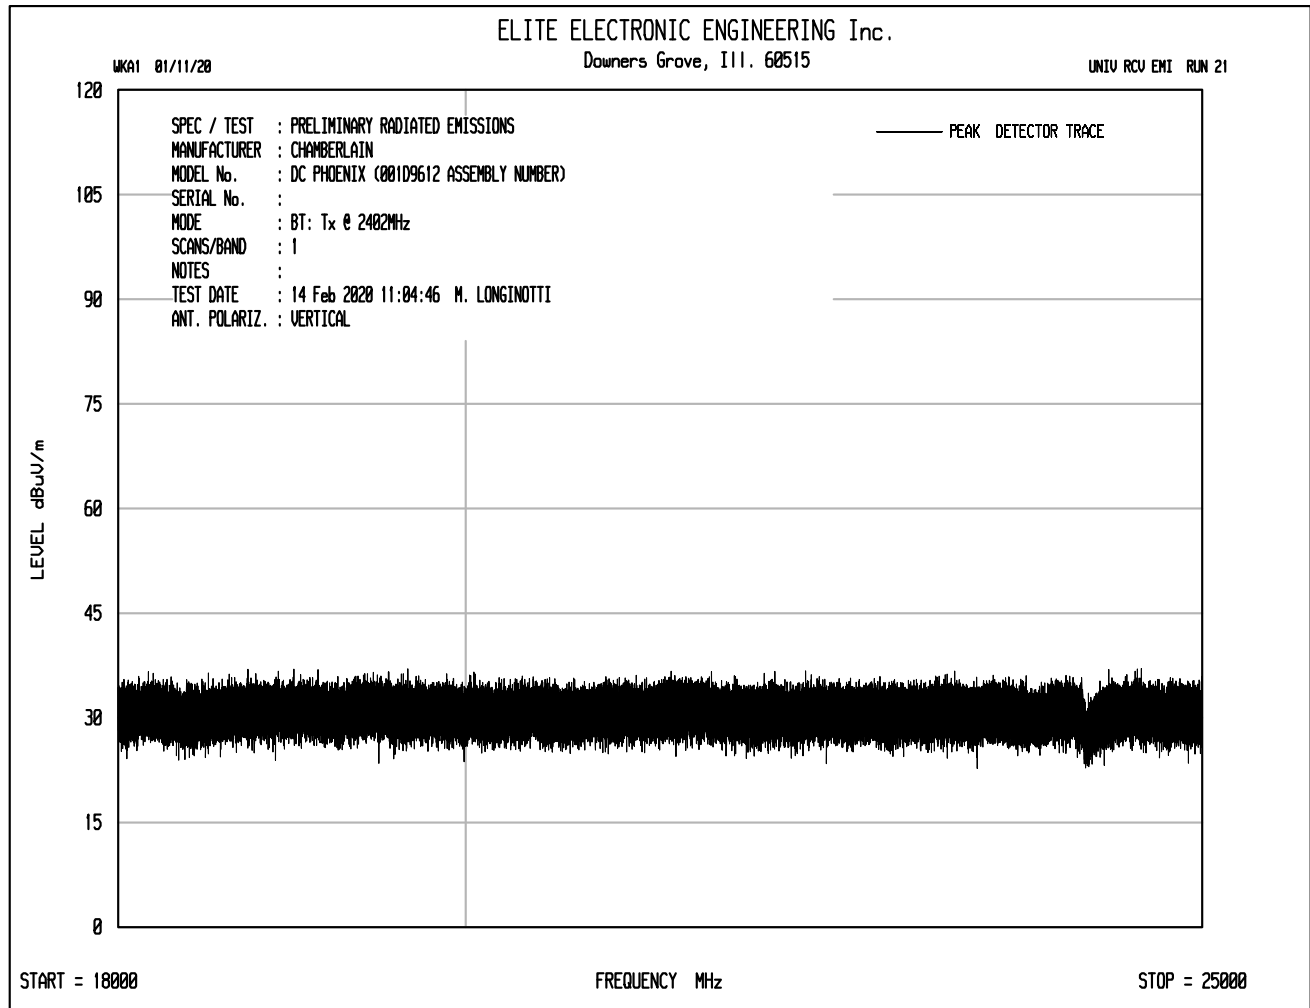


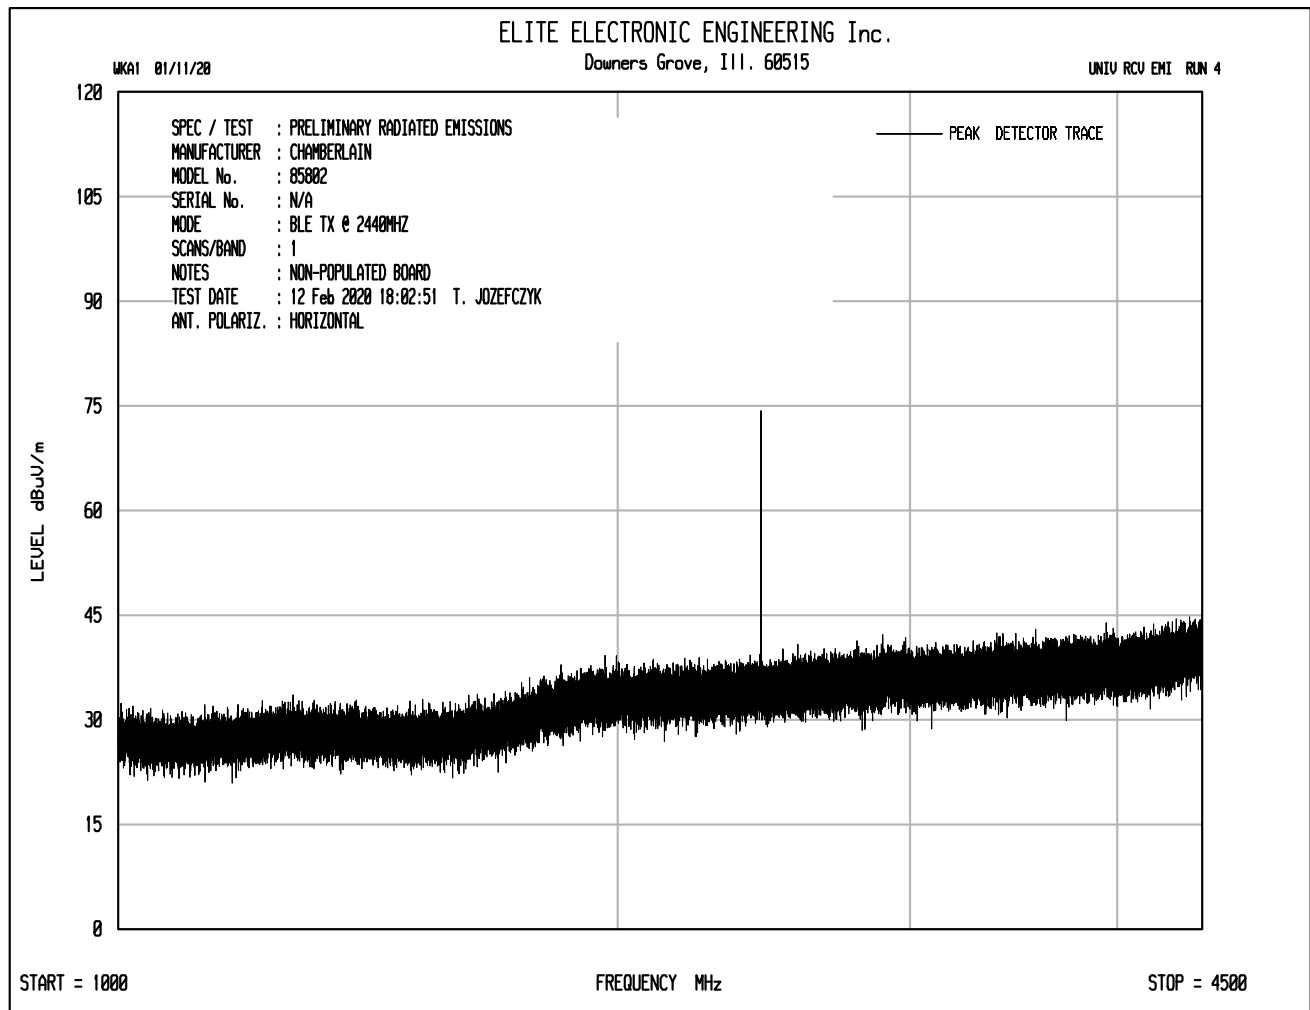


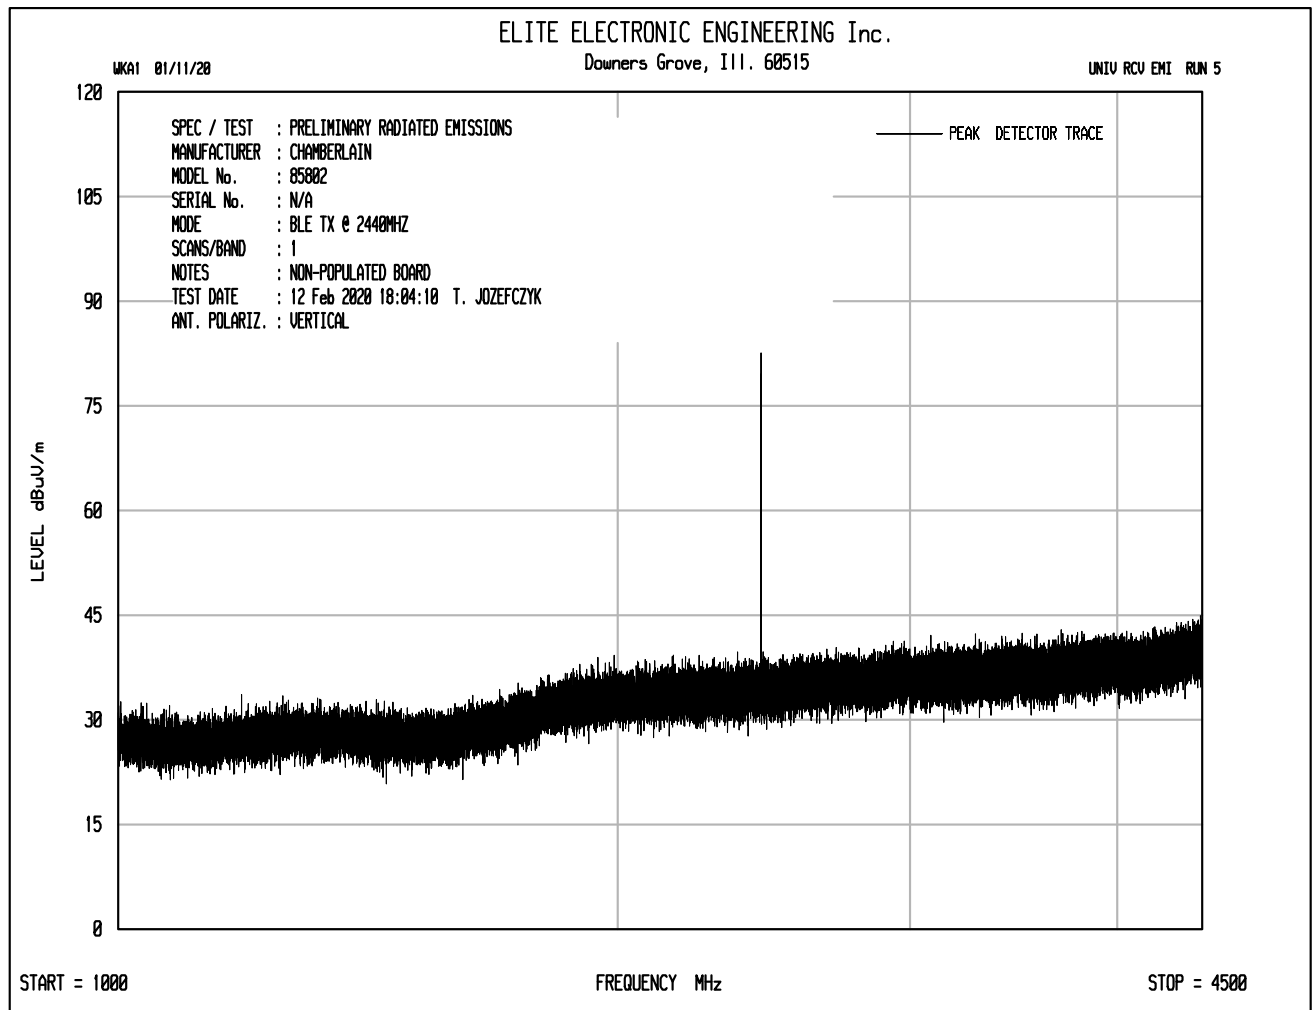


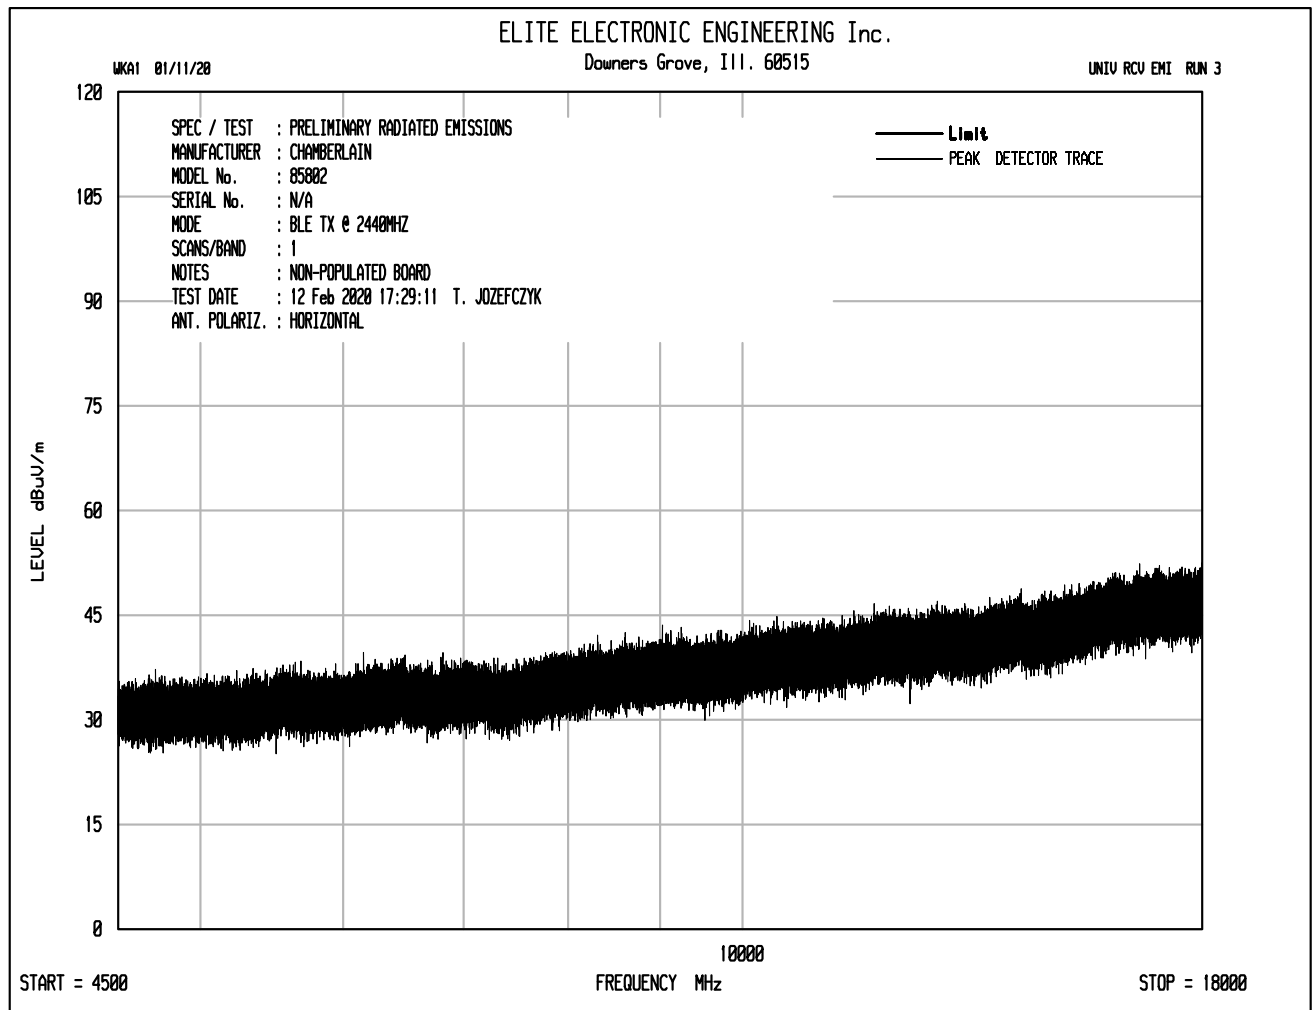


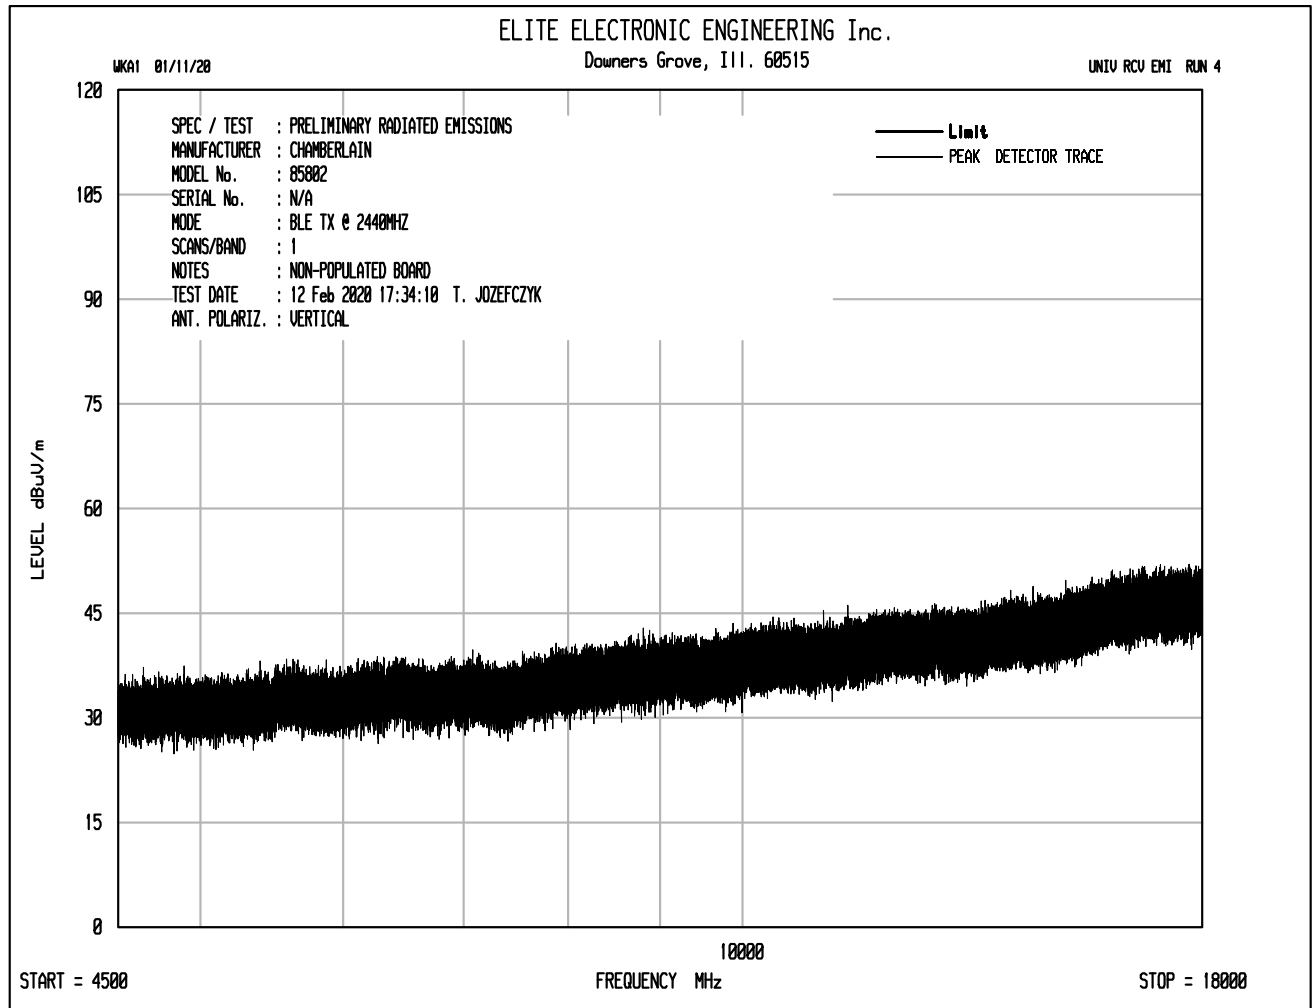


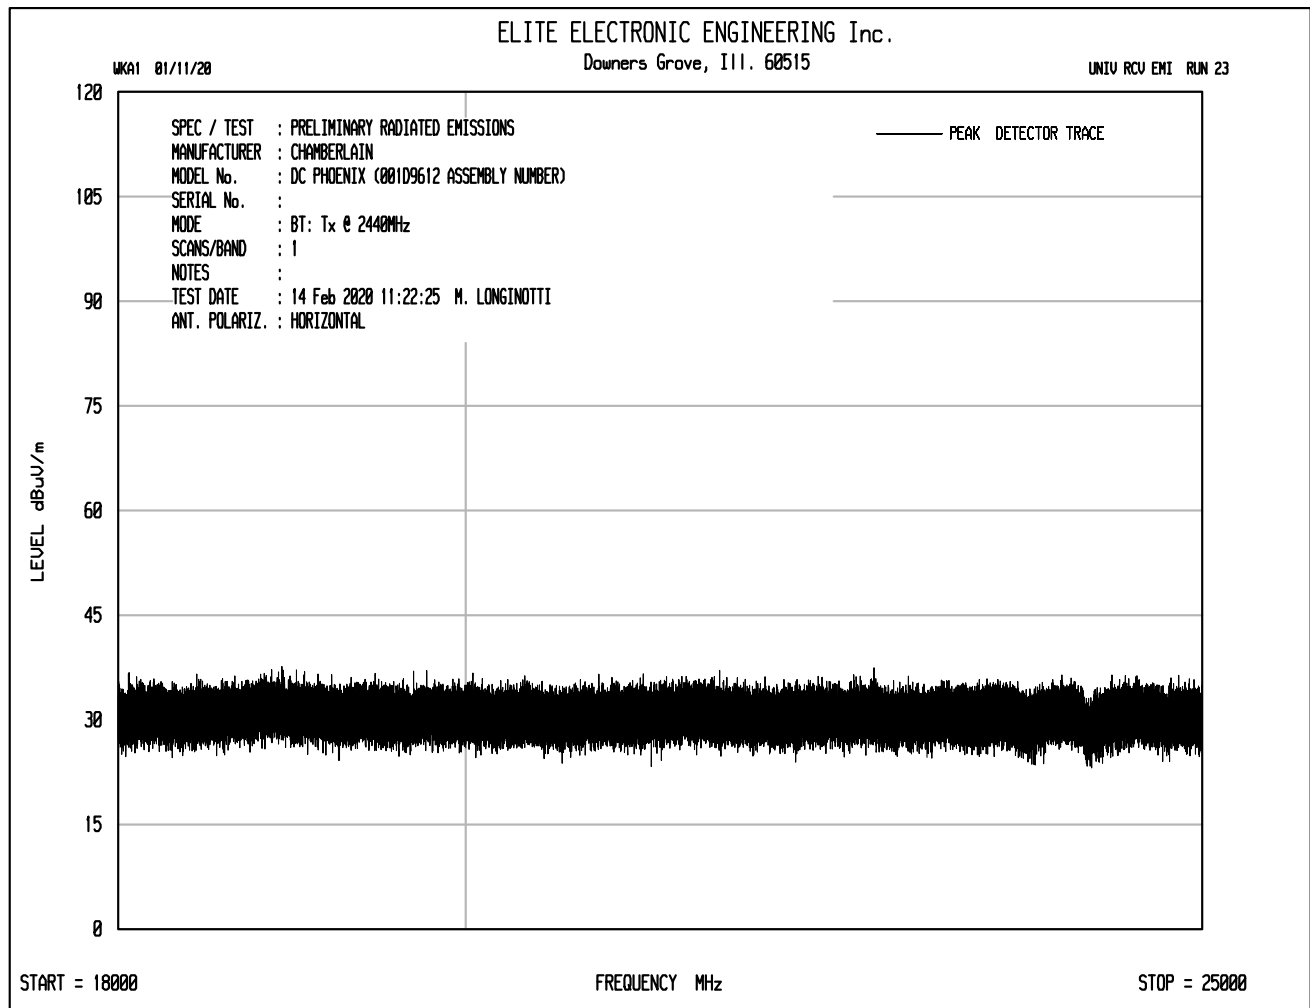


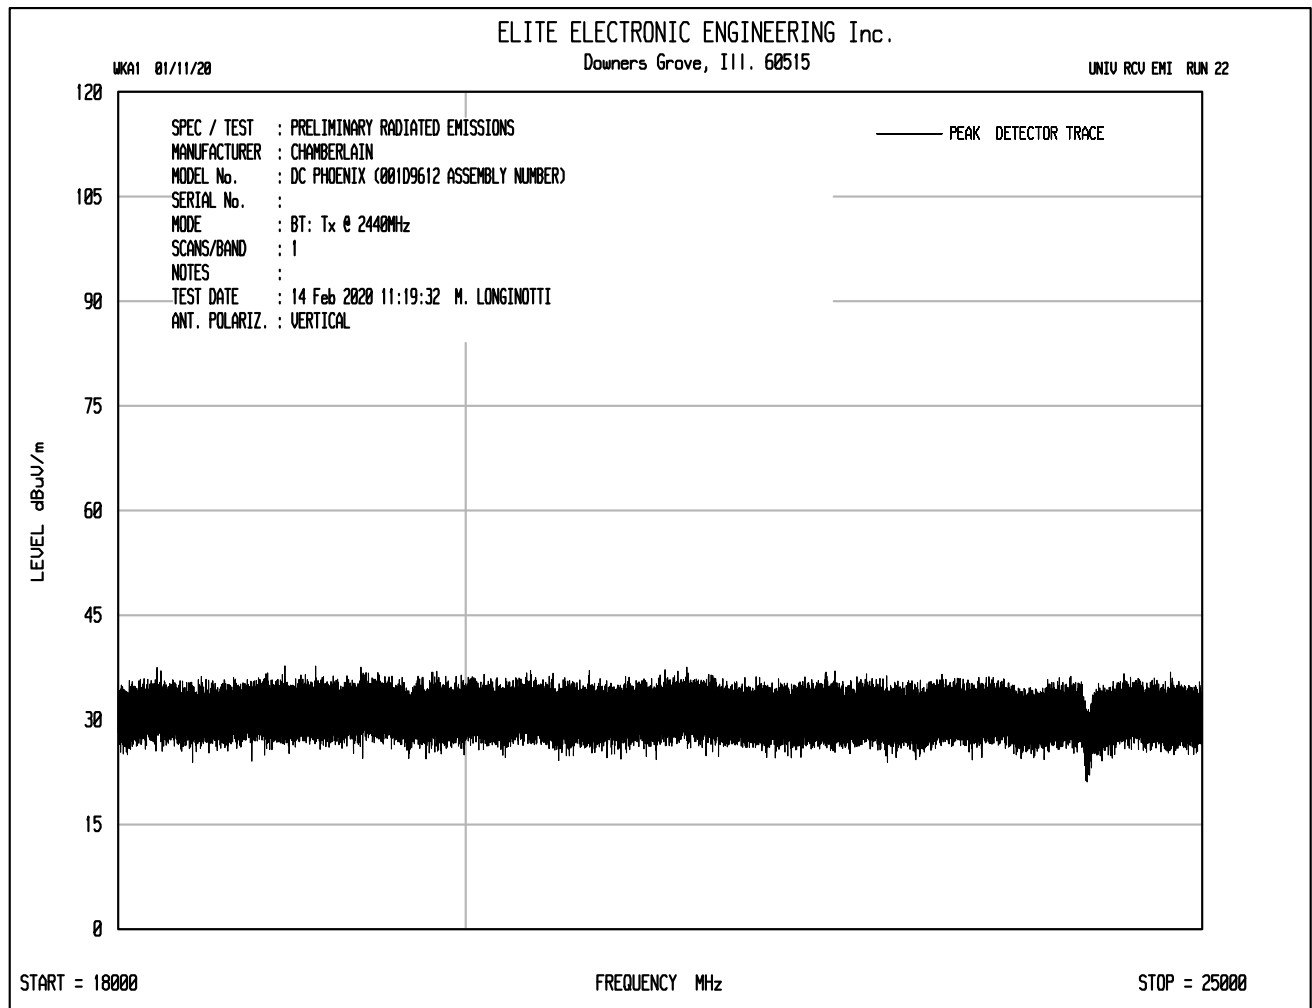


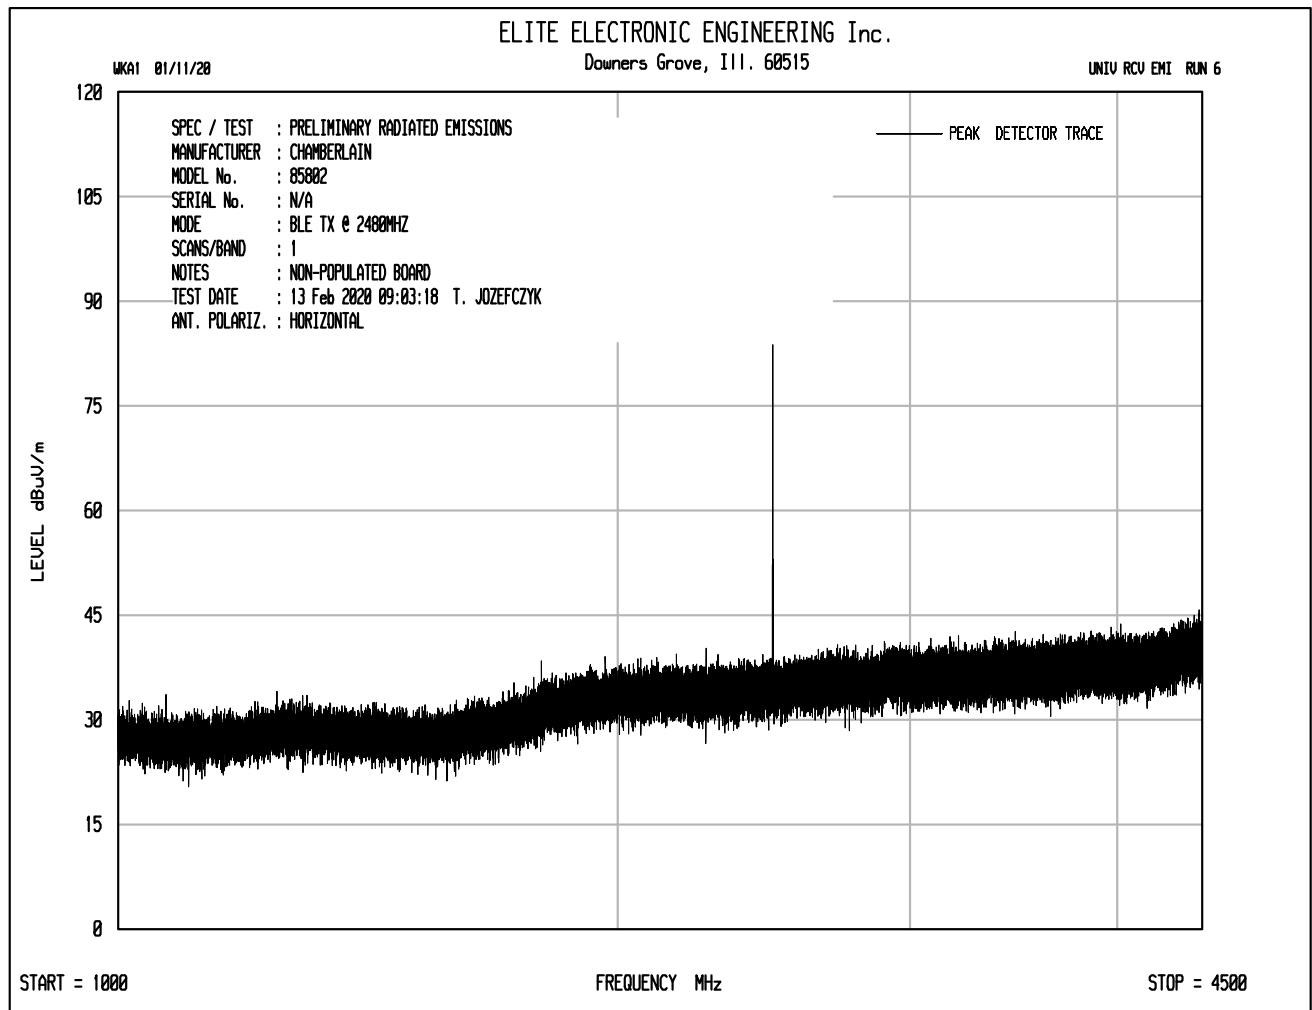


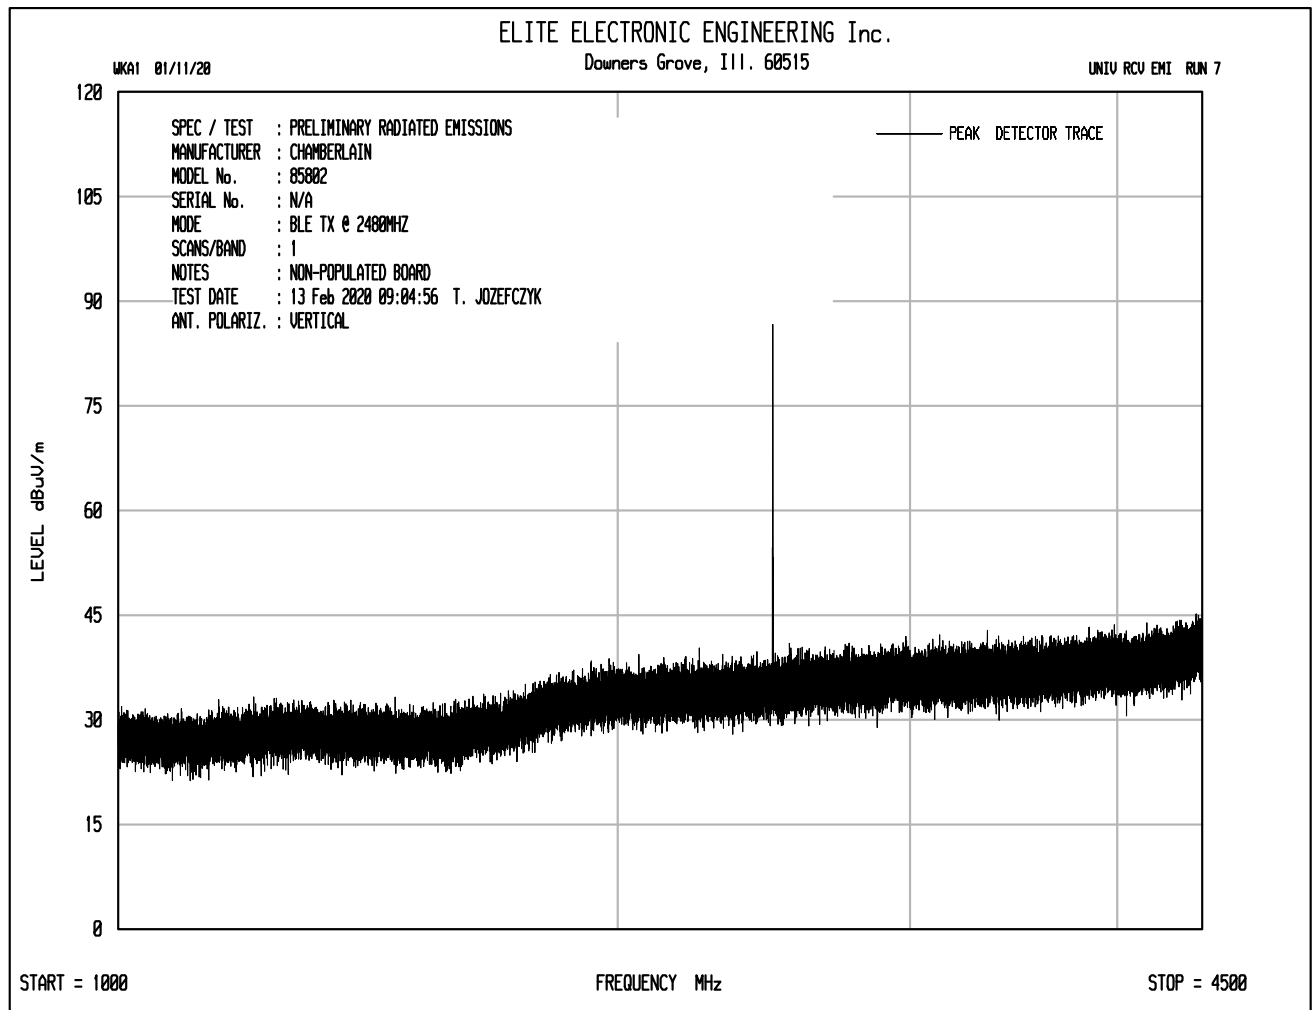

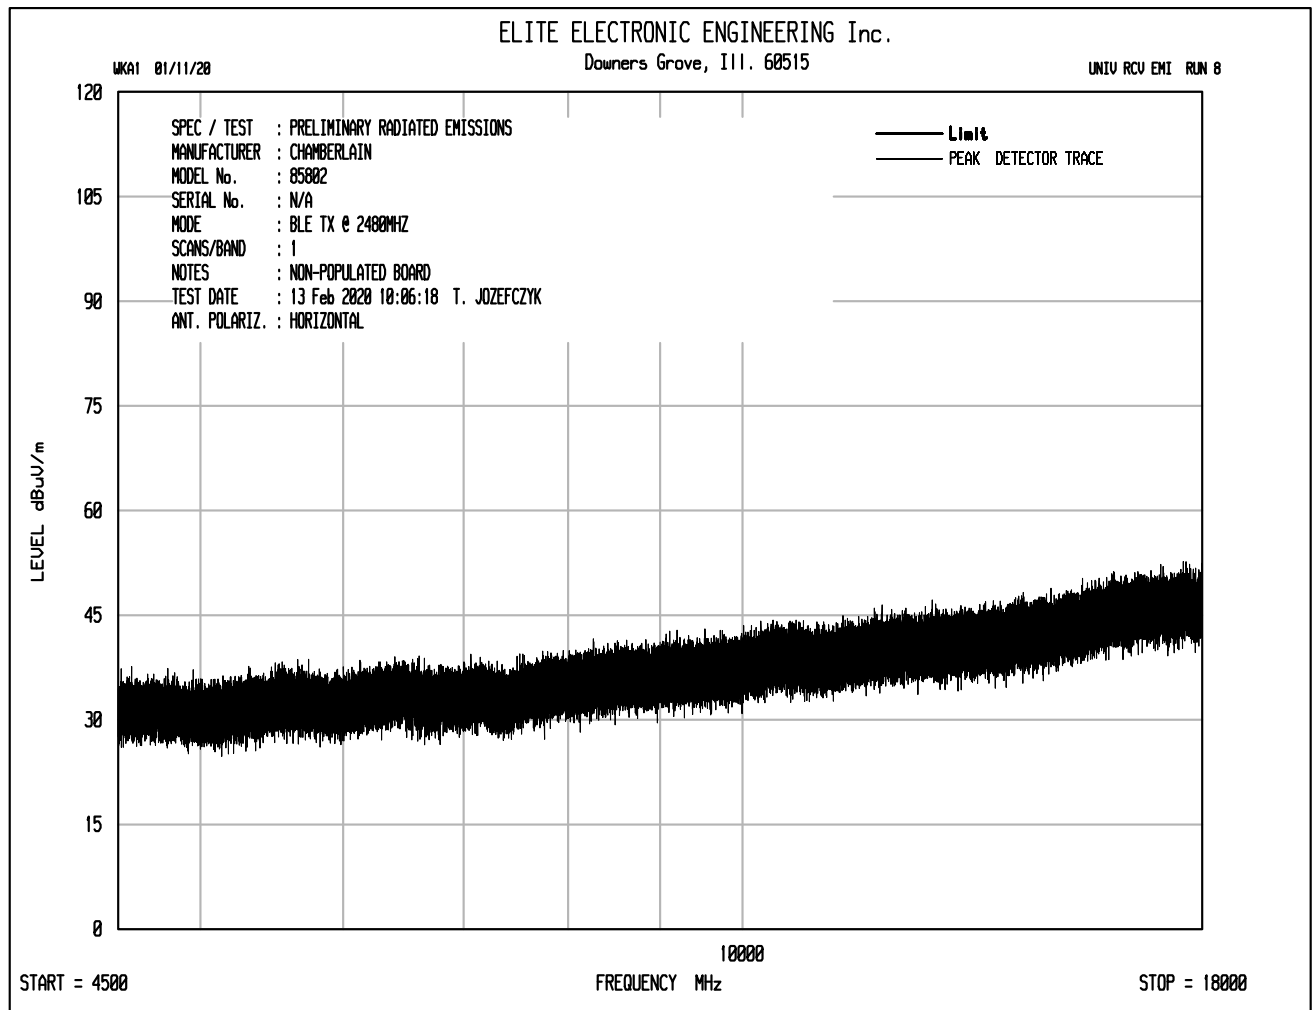

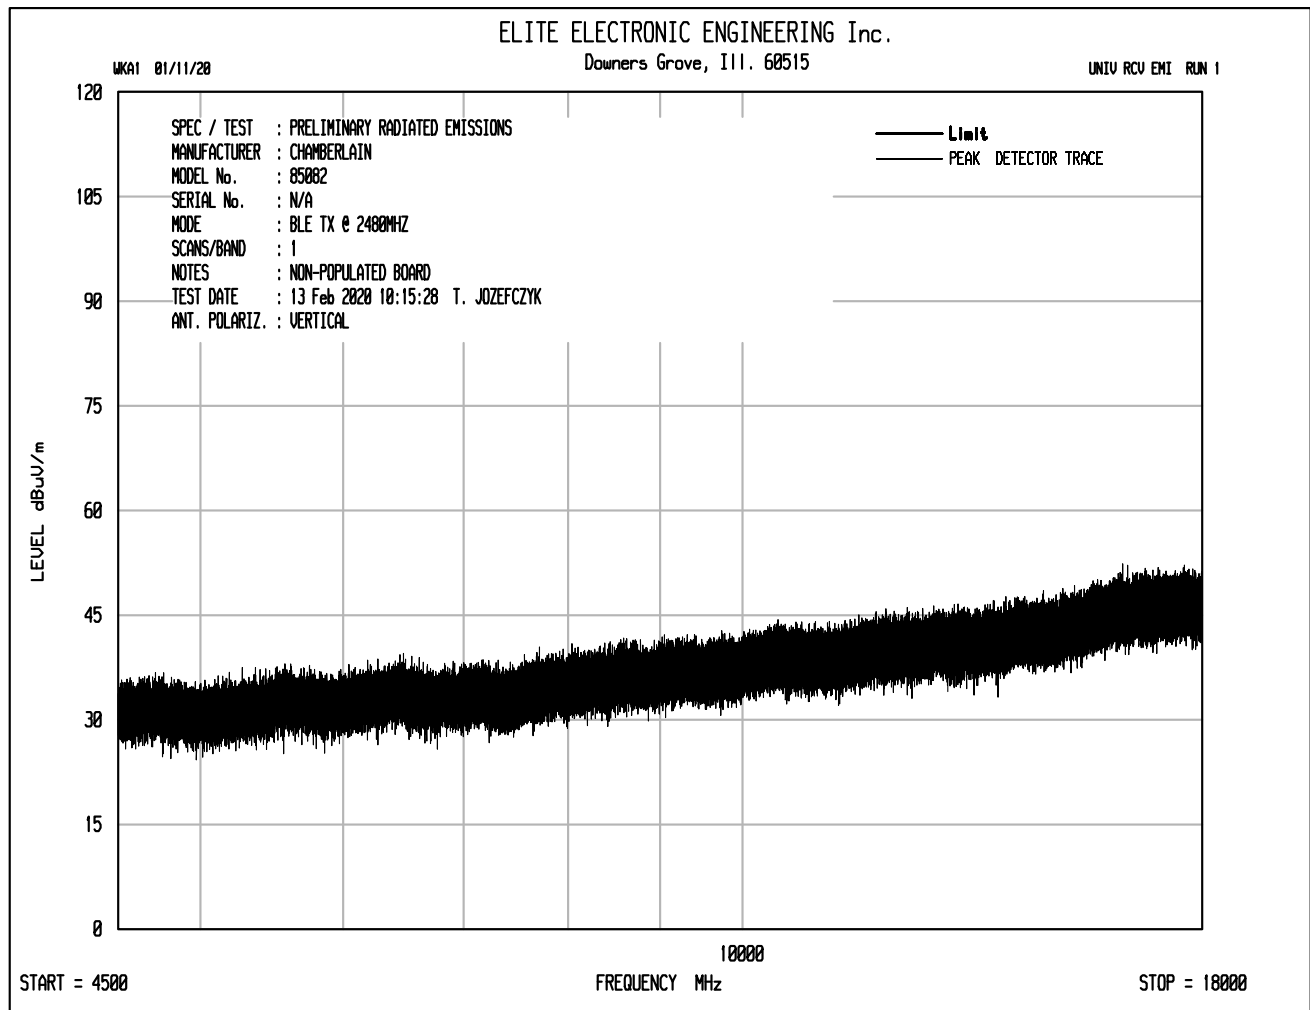

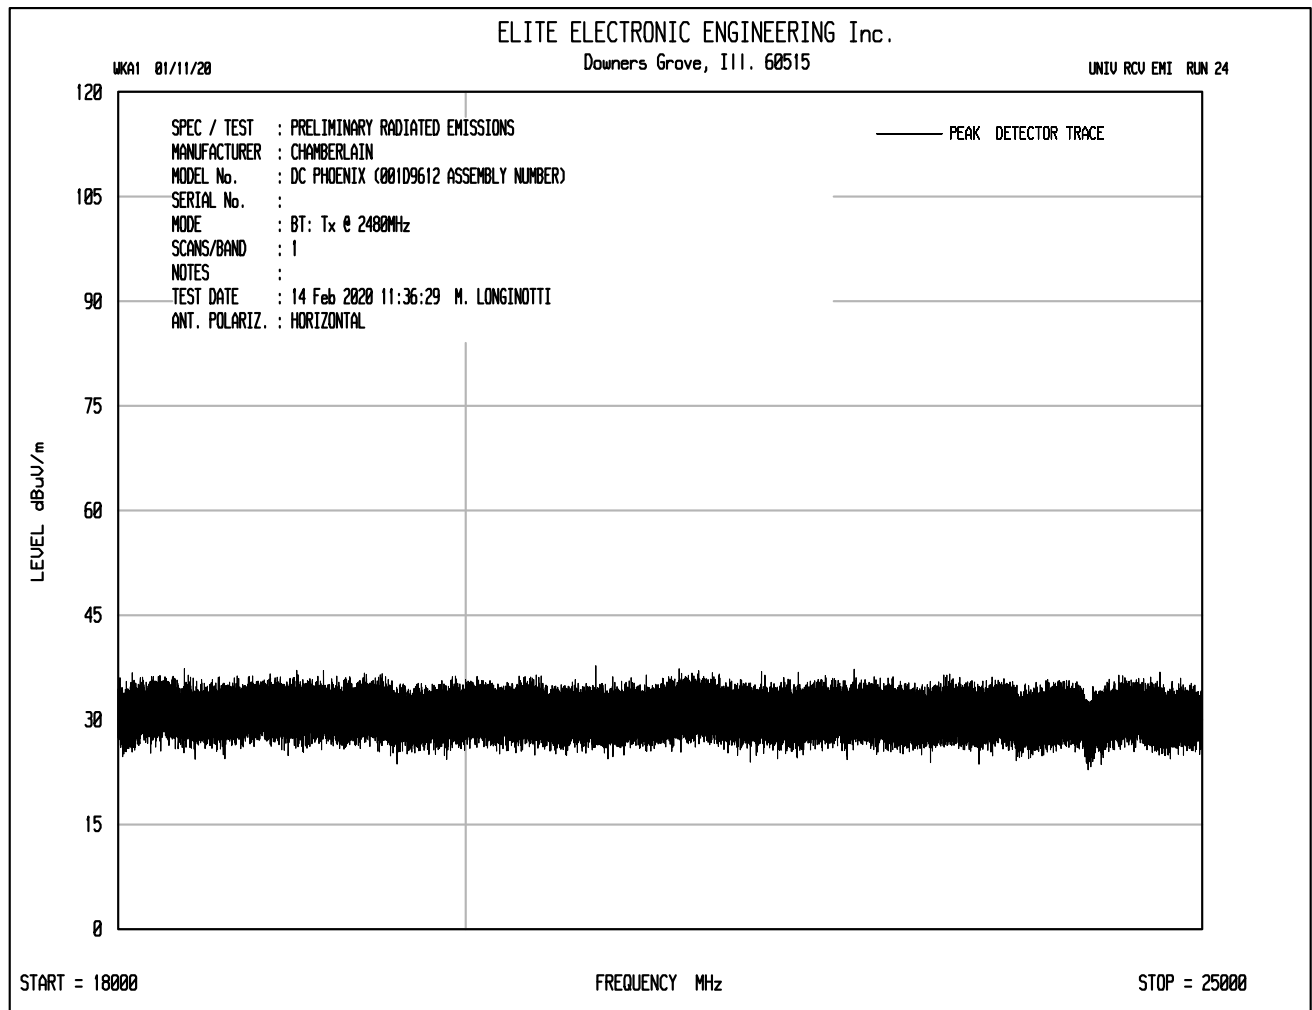

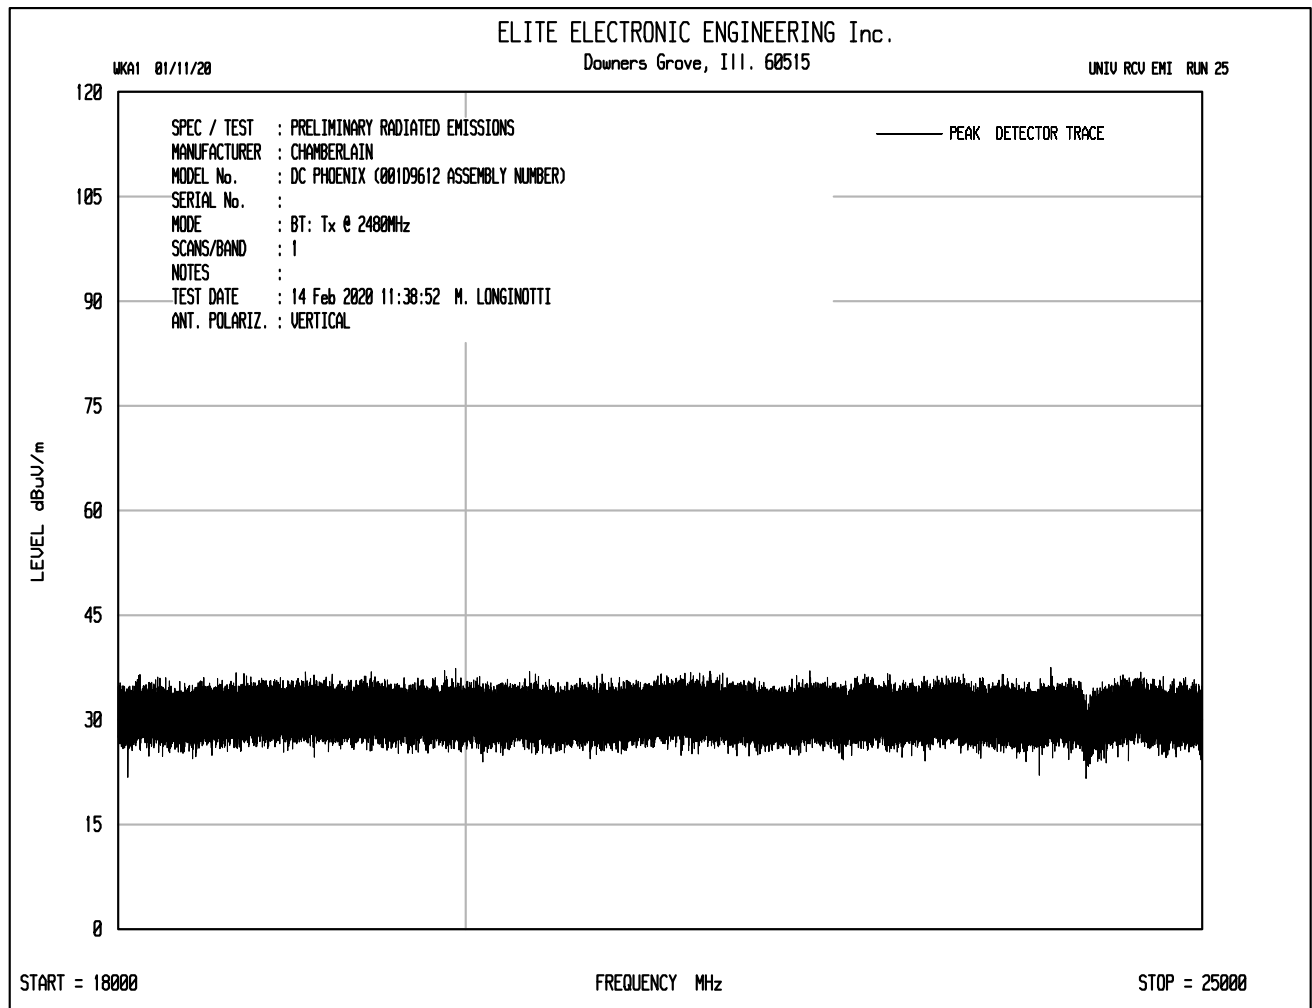

DATA PAGE

MANUFACTURER	Chamberlain Group, Inc.
EUT	MyQ Garage Door Opener
MODEL NO.	B6765T
TEST	FCC §15.247, RSS-247 – Radiated Spurious Emissions – Harmonics in Restricted Bands
MODE	900MHz Tx – 902.25MHz
DATE TESTED	February 10 – 14, 2020
TEST PERFORMED BY	Tylar Jozefczyk
NOTES	

RADIATED SPURIOUS EMISSIONS

Freq. (MHz)	Ant. Pol.	Meter Reading (dBμV)	Ambient	CBL Fac. (dB)	Ant. Fac. (dB)	Pre Amp (dB)	Peak Total dBμV/m at 3m	Peak Total μV/m at 3m	Peak Limit μV/m at 3m	Margin (dB)
2706.75	H	54.38		4.57	32.42	-40.41	50.96	353.09	5000.00	-23.02
2706.75	V	54.68		4.57	32.42	-40.41	51.26	365.50	5000.00	-22.72
3609.00	H	56.98		5.42	33.18	-40.31	55.27	580.01	5000.00	-18.71
3609.00	V	53.57		5.42	33.18	-40.31	51.86	391.68	5000.00	-22.12
4511.25	H	51.31	Ambient	5.63	34.28	-40.10	51.11	359.32	5000.00	-22.87
4511.25	V	50.25	Ambient	5.63	34.28	-40.10	50.05	318.04	5000.00	-23.93
5413.50	H	54.06		5.93	34.65	-40.25	54.39	524.35	5000.00	-19.59
5413.50	V	53.42		5.93	34.65	-40.25	53.75	487.10	5000.00	-20.23
8120.25	H	51.10	Ambient	7.10	36.00	-39.97	54.23	514.62	5000.00	-19.75
8120.25	V	50.70	Ambient	7.10	36.00	-39.97	53.83	491.46	5000.00	-20.15
9022.50	H	51.20	Ambient	7.91	36.50	-39.73	55.88	622.50	5000.00	-18.10
9022.50	V	51.32	Ambient	7.91	36.50	-39.73	56.00	631.16	5000.00	-17.98

DATA PAGE

MANUFACTURER	Chamberlain Group, Inc.
EUT	MyQ Garage Door Opener
MODEL NO.	B6765T
TEST	FCC §15.247, RSS-247 – Radiated Spurious Emissions – Restricted Band Averages
MODE	900MHz Tx – 902.25MHz
DATE TESTED	February 10 – 14, 2020
TEST PERFORMED BY	Tylar Jozefczyk
NOTES	

RADIATED SPURIOUS EMISSIONS

Freq. (MHz)	Ant. Pol.	Meter Reading (dBμV)	Ambient	CBL Fac. (dB)	Ant. Fac. (dB)	Pre Amp (dB)	Duty Cycle (dB)	Average Total dBμV/m at 3m	Average Total μV/m at 3m	Average Limit μV/m at 3m	Margin (dB)
2706.75	H	39.44		4.57	32.42	-40.41	0.00	36.02	63.22	500.00	-17.96
2706.75	V	39.56		4.57	32.42	-40.41	0.00	36.14	64.10	500.00	-17.84
3609.00	H	42.96		5.42	33.18	-40.31	0.00	41.25	115.46	500.00	-12.73
3609.00	V	39.35		5.42	33.18	-40.31	0.00	37.64	76.20	500.00	-16.34
4511.25	H	35.50	Ambient	5.63	34.28	-40.10	0.00	35.30	58.21	500.00	-18.68
4511.25	V	35.55	Ambient	5.63	34.28	-40.10	0.00	35.35	58.54	500.00	-18.63
5413.50	H	40.44		5.93	34.65	-40.25	0.00	40.77	109.30	500.00	-13.21
5413.50	V	38.89		5.93	34.65	-40.25	0.00	39.22	91.44	500.00	-14.76
8120.25	H	36.13	Ambient	7.10	36.00	-39.97	0.00	39.26	91.83	500.00	-14.72
8120.25	V	36.08	Ambient	7.10	36.00	-39.97	0.00	39.21	91.30	500.00	-14.77
9022.50	H	36.10	Ambient	7.91	36.50	-39.73	0.00	40.78	109.43	500.00	-13.20
9022.50	V	36.08	Ambient	7.91	36.50	-39.73	0.00	40.76	109.18	500.00	-13.22

DATA PAGE

MANUFACTURER	Chamberlain Group, Inc.
EUT	MyQ Garage Door Opener
MODEL NO.	B6765T
TEST	FCC §15.247, RSS-247 – Radiated Spurious Emissions – Harmonics in Restricted Bands
MODE	900MHz Tx – 914.75MHz
DATE TESTED	February 10 – 14, 2020
TEST PERFORMED BY	Tylar Jozefczyk
NOTES	

RADIATED SPURIOUS EMISSIONS

Freq. (MHz)	Ant. Pol.	Meter Reading (dBμV)	Ambient	CBL Fac. (dB)	Ant. Fac. (dB)	Pre Amp (dB)	Peak Total dBμV/m at 3m	Peak Total μV/m at 3m	Peak Limit μV/m at 3m	Margin (dB)
2744.25	H	54.12		4.62	32.54	-40.40	50.87	349.74	5000.00	-23.10
2744.25	V	54.69		4.62	32.54	-40.40	51.44	373.46	5000.00	-22.53
3659.00	H	55.37		5.43	33.21	-40.27	53.74	486.65	5000.00	-20.23
3659.00	V	55.16		5.43	33.21	-40.27	53.53	475.03	5000.00	-20.44
4573.75	H	50.74	Ambient	5.64	34.33	-40.13	50.58	338.13	5000.00	-23.40
4573.75	V	51.09	Ambient	5.64	34.33	-40.13	50.93	352.03	5000.00	-23.05
7318.00	H	49.88	Ambient	6.88	35.89	-40.06	52.59	426.18	5000.00	-21.39
7318.00	V	50.10	Ambient	6.88	35.89	-40.06	52.81	437.11	5000.00	-21.17
8232.75	H	51.33	Ambient	7.17	36.04	-39.94	54.60	537.16	5000.00	-19.38
8232.75	V	50.88	Ambient	7.17	36.04	-39.94	54.15	510.04	5000.00	-19.83
9147.50	H	50.83	Ambient	8.10	36.51	-39.70	55.74	612.04	5000.00	-18.24
9147.50	V	50.97	Ambient	8.10	36.51	-39.70	55.88	621.98	5000.00	-18.10

DATA PAGE	
MANUFACTURER	Chamberlain Group, Inc.
EUT	MyQ Garage Door Opener
MODEL NO.	B6765T
TEST	FCC §15.247, RSS-247 – Radiated Spurious Emissions – Restricted Band Averages
MODE	900MHz Tx – 914.75MHz
DATE TESTED	February 10 – 14, 2020
TEST PERFORMED BY	Tylar Jozefczyk
NOTES	

RADIATED SPURIOUS EMISSIONS

Freq. (MHz)	Ant. Pol.	Meter Reading (dBμV)	Ambient	CBL Fac. (dB)	Ant. Fac. (dB)	Pre Amp (dB)	Duty Cycle (dB)	Average Total dBμV/m at 3m	Average Total μV/m at 3m	Average Limit μV/m at 3m	Margin (dB)
2744.25	H	40.37		4.62	32.54	-40.40	0.00	37.12	71.82	500.00	-16.85
2744.25	V	40.32		4.62	32.54	-40.40	0.00	37.07	71.41	500.00	-16.90
3659.00	H	41.49		5.43	33.21	-40.27	0.00	39.86	98.45	500.00	-14.11
3659.00	V	40.78		5.43	33.21	-40.27	0.00	39.15	90.72	500.00	-14.82
4573.75	H	36.17	Ambient	5.64	34.33	-40.13	0.00	36.01	63.18	500.00	-17.97
4573.75	V	36.22	Ambient	5.64	34.33	-40.13	0.00	36.06	63.54	500.00	-17.92
7318.00	H	34.55	Ambient	6.88	35.89	-40.06	0.00	37.26	72.96	500.00	-16.72
7318.00	V	34.55	Ambient	6.88	35.89	-40.06	0.00	37.26	72.96	500.00	-16.72
8232.75	H	36.24	Ambient	7.17	36.04	-39.94	0.00	39.51	94.54	500.00	-14.47
8232.75	V	36.21	Ambient	7.17	36.04	-39.94	0.00	39.48	94.21	500.00	-14.50
9147.50	H	35.82	Ambient	8.10	36.51	-39.70	0.00	40.73	108.71	500.00	-13.25
9147.50	V	35.84	Ambient	8.10	36.51	-39.70	0.00	40.75	108.96	500.00	-13.23

DATA PAGE

MANUFACTURER	Chamberlain Group, Inc.
EUT	MyQ Garage Door Opener
MODEL NO.	B6765T
TEST	FCC §15.247, RSS-247 – Radiated Spurious Emissions – Harmonics in Restricted Bands
MODE	900MHz Tx – 926.75MHz
DATE TESTED	February 10 – 14, 2020
TEST PERFORMED BY	Tylar Jozefczyk
NOTES	

RADIATED SPURIOUS EMISSIONS

Freq. (MHz)	Ant. Pol.	Meter Reading (dBμV)	Ambient	CBL Fac. (dB)	Ant. Fac. (dB)	Pre Amp (dB)	Peak Total dBμV/m at 3m	Peak Total μV/m at 3m	Peak Limit μV/m at 3m	Margin (dB)
2780.25	H	54.05		4.66	32.48	-40.38	50.81	347.09	5000.00	-23.17
2780.25	V	53.69		4.66	32.48	-40.38	50.45	333.00	5000.00	-23.53
3707.00	H	55.07		5.44	33.22	-40.23	53.51	473.52	5000.00	-20.47
3707.00	V	54.88		5.44	33.22	-40.23	53.32	463.28	5000.00	-20.66
4633.75	H	49.31	Ambient	5.65	34.32	-40.16	49.12	285.89	5000.00	-24.86
4633.75	V	50.57	Ambient	5.65	34.32	-40.16	50.38	330.52	5000.00	-23.60
7414.00	H	50.03	Ambient	6.90	35.81	-40.05	52.70	431.33	5000.00	-21.28
7414.00	V	49.98	Ambient	6.90	35.81	-40.05	52.65	428.86	5000.00	-21.33
8340.75	H	51.01	Ambient	7.22	36.10	-39.91	54.42	526.12	5000.00	-19.56
8340.75	V	50.75	Ambient	7.22	36.10	-39.91	54.16	510.61	5000.00	-19.82

DATA PAGE

MANUFACTURER	Chamberlain Group, Inc.
EUT	MyQ Garage Door Opener
MODEL NO.	B6765T
TEST	FCC §15.247, RSS-247 – Radiated Spurious Emissions – Restricted Band Averages
MODE	900MHz Tx – 926.75MHz
DATE TESTED	February 10 – 14, 2020
TEST PERFORMED BY	Tylar Jozefczyk
NOTES	

RADIATED SPURIOUS EMISSIONS

Freq. (MHz)	Ant. Pol.	Meter Reading (dBμV)	Ambient	CBL Fac. (dB)	Ant. Fac. (dB)	Pre Amp (dB)	Duty Cycle (dB)	Average Total dBμV/m at 3m	Average Total μV/m at 3m	Average Limit μV/m at 3m	Margin (dB)
2780.25	H	40.34		4.66	32.48	-40.38	0.00	37.10	71.60	500.00	-16.88
2780.25	V	38.29		4.66	32.48	-40.38	0.00	35.05	56.55	500.00	-18.93
3707.00	H	40.76		5.44	33.22	-40.23	0.00	39.20	91.17	500.00	-14.78
3707.00	V	41.58		5.44	33.22	-40.23	0.00	40.02	100.19	500.00	-13.96
4633.75	H	35.36	Ambient	5.65	34.32	-40.16	0.00	35.17	57.37	500.00	-18.81
4633.75	V	35.23	Ambient	5.65	34.32	-40.16	0.00	35.04	56.52	500.00	-18.94
7414.00	H	34.62	Ambient	6.90	35.81	-40.05	0.00	37.29	73.17	500.00	-16.69
7414.00	V	34.65	Ambient	6.90	35.81	-40.05	0.00	37.32	73.42	500.00	-16.66
8340.75	H	35.96	Ambient	7.22	36.10	-39.91	0.00	39.37	93.02	500.00	-14.61
8340.75	V	35.93	Ambient	7.22	36.10	-39.91	0.00	39.34	92.70	500.00	-14.64

DATA PAGE	
MANUFACTURER	Chamberlain Group, Inc.
EUT	MyQ Garage Door Opener
MODEL NO.	B6765T
TEST	FCC §15.247, RSS-247 – Radiated Spurious Emissions – Harmonics in Non-Restricted Bands
MODE	Wi-Fi – 802.11b - 2412MHz
DATE TESTED	February 10 – 14, 2020
TEST PERFORMED BY	Tylar Jozefczyk
NOTES	

RADIATED SPURIOUS EMISSIONS

Freq. (MHz)	Ant. Pol.	Meter Reading (dBμV)	Ambient	CBL Fac. (dB)	Ant. Fac. (dB)	Pre Amp (dB)	Peak Total dBμV/m at 3m	Peak Total μV/m at 3m	Peak Limit μV/m at 3m	Margin (dB)
2412.00	H	61.13		4.29	32.20	0.00	97.62	76045.73		
2412.00	V	63.31		4.29	32.20	0.00	99.80	97740.56		
7236.00	H	39.79	Ambient	6.86	35.92	-40.06	42.51	133.52	9774.06	-37.29
7236.00	V	39.45	Ambient	6.86	35.92	-40.06	42.17	128.40	9774.06	-37.63
9648.00	H	40.60	Ambient	8.21	36.89	-39.58	46.12	202.38	9774.06	-33.68
9648.00	V	41.90	Ambient	8.21	36.89	-39.58	47.42	235.05	9774.06	-32.38
16884.00	H	39.72	Ambient	10.95	42.01	-38.82	53.86	493.27	9774.06	-25.94
16884.00	V	39.97	Ambient	10.95	42.01	-38.82	54.11	507.67	9774.06	-25.69
21708.00	H	24.10	Ambient	2.23	40.56	-28.88	38.02	79.58	500.00	-15.96
21708.00	V	24.00	Ambient	2.23	40.56	-28.88	37.92	78.67	500.00	-16.06
24120.00	H	23.20	Ambient	2.24	40.62	-30.50	35.56	59.96	500.00	-18.42
24120.00	V	22.80	Ambient	2.24	40.62	-30.50	35.16	57.26	500.00	-18.82
2400.00	H	17.26		4.28	32.18	0.00	53.72	485.30	9774.06	-26.08
2400.00	V	18.08		4.28	32.18	0.00	54.54	533.34	9774.06	-25.26

DATA PAGE	
MANUFACTURER	Chamberlain Group, Inc.
EUT	MyQ Garage Door Opener
MODEL NO.	B6765T
TEST	FCC §15.247, RSS-247 – Radiated Spurious Emissions – Harmonics in Restricted Bands
MODE	Wi-Fi – 802.11b - 2412MHz
DATE TESTED	February 10 – 14, 2020
TEST PERFORMED BY	Tylar Jozefczyk
NOTES	

RADIATED SPURIOUS EMISSIONS

Freq. (MHz)	Ant. Pol.	Meter Reading (dBμV)	Ambient	CBL Fac. (dB)	Ant. Fac. (dB)	Pre Amp (dB)	Peak Total dBμV/m at 3m	Peak Total μV/m at 3m	Peak Limit μV/m at 3m	Margin (dB)
4824.00	H	50.55	Ambient	5.70	34.16	-40.23	50.18	322.83	5000.00	-23.80
4824.00	V	50.68	Ambient	5.70	34.16	-40.23	50.31	327.70	5000.00	-23.67
12060.00	H	51.59	Ambient	8.61	38.68	-39.68	59.21	912.74	5000.00	-14.77
12060.00	V	51.97	Ambient	8.61	38.68	-39.68	59.59	953.56	5000.00	-14.39
14472.00	H	50.73	Ambient	9.58	39.61	-40.03	59.89	987.28	5000.00	-14.09
14472.00	V	50.50	Ambient	9.58	39.61	-40.03	59.66	961.48	5000.00	-14.32
19296.00	H	34.70	Ambient	2.21	40.38	-28.54	48.76	274.06	5000.00	-25.22
19296.00	V	35.10	Ambient	2.21	40.38	-28.54	49.16	286.97	5000.00	-24.82

DATA PAGE

MANUFACTURER	Chamberlain Group, Inc.
EUT	MyQ Garage Door Opener
MODEL NO.	B6765T
TEST	FCC §15.247, RSS-247 – Radiated Spurious Emissions – Restricted Band Averages
MODE	Wi-Fi – 802.11b - 2412MHz
DATE TESTED	February 10 – 14, 2020
TEST PERFORMED BY	Tylar Jozefczyk
NOTES	

RADIATED SPURIOUS EMISSIONS

Freq. (MHz)	Ant. Pol.	Meter Reading (dBμV)	Ambient	CBL Fac. (dB)	Ant. Fac. (dB)	Pre Amp (dB)	Duty Cycle (dB)	Average Total dBμV/m at 3m	Average Total μV/m at 3m	Average Limit μV/m at 3m	Margin (dB)
4824.00	H	35.55	Ambient	5.70	34.16	-40.23	0.00	35.18	57.41	500.00	-18.80
4824.00	V	35.56	Ambient	5.70	34.16	-40.23	0.00	35.19	57.47	500.00	-18.79
12060.00	H	36.77	Ambient	8.61	38.68	-39.68	0.00	44.39	165.71	500.00	-9.59
12060.00	V	36.74	Ambient	8.61	38.68	-39.68	0.00	44.36	165.14	500.00	-9.62
14472.00	H	35.75	Ambient	9.58	39.61	-40.03	0.00	44.91	175.97	500.00	-9.07
14472.00	V	35.73	Ambient	9.58	39.61	-40.03	0.00	44.89	175.57	500.00	-9.09
19296.00	H	21.20		2.21	40.38	-28.54	0.00	35.26	57.92	500.00	-18.72
19296.00	V	21.70		2.21	40.38	-28.54	0.00	35.76	61.35	500.00	-18.22

DATA PAGE	
MANUFACTURER	Chamberlain Group, Inc.
EUT	MyQ Garage Door Opener
MODEL NO.	B6765T
TEST	FCC §15.247, RSS-247 – Radiated Spurious Emissions – Harmonics in Non-Restricted Bands
MODE	Wi-Fi – 802.11b - 2437MHz
DATE TESTED	February 10 – 14, 2020
TEST PERFORMED BY	Tylar Jozefczyk
NOTES	

RADIATED SPURIOUS EMISSIONS

Freq. (MHz)	Ant. Pol.	Meter Reading (dBμV)	Ambient	CBL Fac. (dB)	Ant. Fac. (dB)	Pre Amp (dB)	Peak Total dBμV/m at 3m	Peak Total μV/m at 3m	Peak Limit μV/m at 3m	Margin (dB)
2437.00	H	60.91		4.30	32.25	0.00	97.47	74699.19		
2437.00	V	64.04		4.30	32.25	0.00	100.60	107106.52		
9748.00	H	40.57	Ambient	8.24	36.99	-39.56	46.24	205.23	10710.65	-34.35
9748.00	V	40.49	Ambient	8.24	36.99	-39.56	46.16	203.35	10710.65	-34.43
14622.00	H	40.64	Ambient	9.70	39.70	-40.17	49.87	311.60	10710.65	-30.72
14622.00	V	40.54	Ambient	9.70	39.70	-40.17	49.77	308.04	10710.65	-30.82
17059.00	H	39.94	Ambient	10.96	41.85	-38.77	53.98	499.99	10710.65	-26.62
17059.00	V	39.42	Ambient	10.96	41.85	-38.77	53.46	470.94	10710.65	-27.14
21933.00	H	23.70	Ambient	2.21	40.58	-29.36	37.12	71.79	500.00	-16.86
21933.00	V	23.80	Ambient	2.21	40.58	-29.36	37.22	72.62	500.00	-16.76
24370.00	H	25.30	Ambient	2.23	40.63	-30.37	37.79	77.53	500.00	-16.19
24370.00	V	24.40	Ambient	2.23	40.63	-30.37	36.89	69.90	500.00	-17.09

DATA PAGE

MANUFACTURER	Chamberlain Group, Inc.
EUT	MyQ Garage Door Opener
MODEL NO.	B6765T
TEST	FCC §15.247, RSS-247 – Radiated Spurious Emissions – Harmonics in Restricted Bands
MODE	Wi-Fi – 802.11b - 2437MHz
DATE TESTED	February 10 – 14, 2020
TEST PERFORMED BY	Tylar Jozefczyk
NOTES	

RADIATED SPURIOUS EMISSIONS

Freq. (MHz)	Ant. Pol.	Meter Reading (dBμV)	Ambient	CBL Fac. (dB)	Ant. Fac. (dB)	Pre Amp (dB)	Peak Total dBμV/m at 3m	Peak Total μV/m at 3m	Peak Limit μV/m at 3m	Margin (dB)
4874.00	H	50.48	Ambient	5.73	34.14	-40.25	50.10	319.74	5000.00	-23.88
4874.00	V	50.10	Ambient	5.73	34.14	-40.25	49.72	306.06	5000.00	-24.26
7311.00	H	49.71	Ambient	6.88	35.90	-40.06	52.43	418.12	5000.00	-21.55
7311.00	V	50.02	Ambient	6.88	35.90	-40.06	52.74	433.31	5000.00	-21.24
12185.00	H	50.82	Ambient	8.93	38.69	-39.62	58.81	872.43	5000.00	-15.16
12185.00	V	50.71	Ambient	8.93	38.69	-39.62	58.70	861.45	5000.00	-15.27
19496.00	H	34.10	Ambient	2.22	40.39	-28.81	47.90	248.37	5000.00	-26.08
19496.00	V	34.40	Ambient	2.22	40.39	-28.81	48.20	257.10	5000.00	-25.78

DATA PAGE

MANUFACTURER	Chamberlain Group, Inc.
EUT	MyQ Garage Door Opener
MODEL NO.	B6765T
TEST	FCC §15.247, RSS-247 – Radiated Spurious Emissions – Restricted Band Averages
MODE	Wi-Fi – 802.11b - 2437MHz
DATE TESTED	February 10 – 14, 2020
TEST PERFORMED BY	Tylar Jozefczyk
NOTES	

RADIATED SPURIOUS EMISSIONS

Freq. (MHz)	Ant. Pol.	Meter Reading (dBμV)	Ambient	CBL Fac. (dB)	Ant. Fac. (dB)	Pre Amp (dB)	Duty Cycle (dB)	Average Total dBμV/m at 3m	Average Total μV/m at 3m	Average Limit μV/m at 3m	Margin (dB)
4874.00	H	35.39	Ambient	5.73	34.14	-40.25	0.00	35.01	56.27	500.00	-18.97
4874.00	V	35.24	Ambient	5.73	34.14	-40.25	0.00	34.86	55.31	500.00	-19.12
7311.00	H	34.67	Ambient	6.88	35.90	-40.06	0.00	37.39	74.01	500.00	-16.59
7311.00	V	34.71	Ambient	6.88	35.90	-40.06	0.00	37.43	74.35	500.00	-16.55
12185.00	H	36.17	Ambient	8.93	38.69	-39.62	0.00	44.16	161.52	500.00	-9.81
12185.00	V	36.16	Ambient	8.93	38.69	-39.62	0.00	44.15	161.34	500.00	-9.82
19496.00	H	20.70	Ambient	2.22	40.39	-28.81	0.00	34.50	53.10	500.00	-19.48
19496.00	V	20.80	Ambient	2.22	40.39	-28.81	0.00	34.60	53.71	500.00	-19.38

DATA PAGE	
MANUFACTURER	Chamberlain Group, Inc.
EUT	MyQ Garage Door Opener
MODEL NO.	B6765T
TEST	FCC §15.247, RSS-247 – Radiated Spurious Emissions – Harmonics in Non-Restricted Bands
MODE	Wi-Fi – 802.11b - 2462MHz
DATE TESTED	February 10 – 14, 2020
TEST PERFORMED BY	Tylar Jozefczyk
NOTES	

RADIATED SPURIOUS EMISSIONS

Freq. (MHz)	Ant. Pol.	Meter Reading (dBμV)	Ambient	CBL Fac. (dB)	Ant. Fac. (dB)	Pre Amp (dB)	Peak Total dBμV/m at 3m	Peak Total μV/m at 3m	Peak Limit μV/m at 3m	Margin (dB)
2462.00	H	64.08		4.32	32.30	0.00	100.70	108351.91		
2462.00	V	64.99		4.32	32.30	0.00	101.61	120319.65		
9848.00	H	40.03	Ambient	8.27	37.08	-39.53	45.85	196.02	12031.96	-35.76
9848.00	V	39.41	Ambient	8.27	37.08	-39.53	45.23	182.52	12031.96	-36.38
14772.00	H	39.18	Ambient	9.79	39.73	-40.30	48.41	263.21	12031.96	-33.20
14772.00	V	38.89	Ambient	9.79	39.73	-40.30	48.12	254.57	12031.96	-33.49
17234.00	H	39.03	Ambient	11.02	41.68	-38.96	52.77	435.12	12031.96	-28.83
17234.00	V	38.46	Ambient	11.02	41.68	-38.96	52.20	407.48	12031.96	-29.40
24620.00	H	24.60	Ambient	2.22	40.64	-30.71	36.74	68.71	500.00	-17.24
24620.00	V	24.70	Ambient	2.22	40.64	-30.71	36.84	69.51	500.00	-17.14

DATA PAGE	
MANUFACTURER	Chamberlain Group, Inc.
EUT	MyQ Garage Door Opener
MODEL NO.	B6765T
TEST	FCC §15.247, RSS-247 – Radiated Spurious Emissions – Harmonics in Restricted Bands
MODE	Wi-Fi – 802.11b - 2462MHz
DATE TESTED	February 10 – 14, 2020
TEST PERFORMED BY	Tylar Jozefczyk
NOTES	

RADIATED SPURIOUS EMISSIONS

Freq. (MHz)	Ant. Pol.	Meter Reading (dBμV)	Ambient	CBL Fac. (dB)	Ant. Fac. (dB)	Pre Amp (dB)	Peak Total dBμV/m at 3m	Peak Total μV/m at 3m	Peak Limit μV/m at 3m	Margin (dB)
4924.00	H	50.13	Ambient	5.77	34.13	-40.27	49.75	307.36	5000.00	-24.23
4924.00	V	49.24	Ambient	5.77	34.13	-40.27	48.86	277.42	5000.00	-25.12
7386.00	H	49.90	Ambient	6.89	35.83	-40.05	52.58	425.44	5000.00	-21.40
7386.00	V	48.86	Ambient	6.89	35.83	-40.05	51.54	377.43	5000.00	-22.44
12310.00	H	50.96	Ambient	9.30	38.66	-39.57	59.34	926.97	5000.00	-14.64
12310.00	V	49.53	Ambient	9.30	38.66	-39.57	57.91	786.26	5000.00	-16.07
19696.00	H	34.80	Ambient	2.23	40.40	-28.48	48.94	280.06	5000.00	-25.03
19696.00	V	34.50	Ambient	2.23	40.40	-28.48	48.64	270.55	5000.00	-25.33
22158.00	H	34.90	Ambient	2.21	40.58	-29.30	48.40	263.01	5000.00	-25.58
22158.00	V	34.60	Ambient	2.21	40.58	-29.30	48.10	254.08	5000.00	-25.88

DATA PAGE

MANUFACTURER	Chamberlain Group, Inc.
EUT	MyQ Garage Door Opener
MODEL NO.	B6765T
TEST	FCC §15.247, RSS-247 – Radiated Spurious Emissions – Restricted Band Averages
MODE	Wi-Fi – 802.11b - 2462MHz
DATE TESTED	February 10 – 14, 2020
TEST PERFORMED BY	Tylar Jozefczyk
NOTES	

RADIATED SPURIOUS EMISSIONS

Freq. (MHz)	Ant. Pol.	Meter Reading (dBμV)	Ambient	CBL Fac. (dB)	Ant. Fac. (dB)	Pre Amp (dB)	Duty Cycle (dB)	Average Total dBμV/m at 3m	Average Total μV/m at 3m	Average Limit μV/m at 3m	Margin (dB)
4924.00	H	35.19	Ambient	5.77	34.13	-40.27	0.00	34.81	55.04	500.00	-19.17
4924.00	V	35.18	Ambient	5.77	34.13	-40.27	0.00	34.80	54.97	500.00	-19.18
7386.00	H	34.97	Ambient	6.89	35.83	-40.05	0.00	37.65	76.27	500.00	-16.33
7386.00	V	34.88	Ambient	6.89	35.83	-40.05	0.00	37.56	75.48	500.00	-16.42
12310.00	H	36.01	Ambient	9.30	38.66	-39.57	0.00	44.39	165.79	500.00	-9.59
12310.00	V	35.92	Ambient	9.30	38.66	-39.57	0.00	44.30	164.08	500.00	-9.68
19696.00	H	20.80	Ambient	2.23	40.40	-28.48	0.00	34.94	55.88	500.00	-19.03
19696.00	V	21.30	Ambient	2.23	40.40	-28.48	0.00	35.44	59.19	500.00	-18.53
22158.00	H	21.30	Ambient	2.21	40.58	-29.30	0.00	34.80	54.95	500.00	-19.18
22158.00	V	21.40	Ambient	2.21	40.58	-29.30	0.00	34.90	55.59	500.00	-19.08

DATA PAGE

MANUFACTURER	Chamberlain Group, Inc.
EUT	MyQ Garage Door Opener
MODEL NO.	B6765T
TEST	FCC §15.247, RSS-247 – Radiated Spurious Emissions – Harmonics in Non-Restricted Bands
MODE	Wi-Fi – 802.11g - 2412MHz
DATE TESTED	February 10 – 14, 2020
TEST PERFORMED BY	Tylar Jozefczyk
NOTES	

RADIATED SPURIOUS EMISSIONS

Freq. (MHz)	Ant. Pol.	Meter Reading (dBμV)	Ambient	CBL Fac. (dB)	Ant. Fac. (dB)	Pre Amp (dB)	Peak Total dBμV/m at 3m	Peak Total μV/m at 3m	Peak Limit μV/m at 3m	Margin (dB)
2412.00	H	57.87		4.29	32.20	0.00	94.36	52248.62		
2412.00	V	58.05		4.29	32.20	0.00	94.54	53342.68		
7236.00	H	39.76		6.86	35.92	-40.06	42.48	133.06	5334.27	-32.06
7236.00	V	39.74		6.86	35.92	-40.06	42.46	132.75	5334.27	-32.08
9648.00	H	41.83		8.21	36.89	-39.58	47.35	233.17	5334.27	-27.19
9648.00	V	41.51		8.21	36.89	-39.58	47.03	224.73	5334.27	-27.51
16884.00	H	41.30	Ambient	10.95	42.01	-38.82	55.44	591.67	5334.27	-19.10
16884.00	V	40.74	Ambient	10.95	42.01	-38.82	54.88	554.73	5334.27	-19.66
21708.00	H	24.00	Ambient	2.23	40.56	-28.88	37.92	78.67	500.00	-16.06
21708.00	V	24.30	Ambient	2.23	40.56	-28.88	38.22	81.43	500.00	-15.76
24120.00	H	24.10	Ambient	2.24	40.62	-30.50	36.46	66.50	500.00	-17.52
24120.00	V	23.70	Ambient	2.24	40.62	-30.50	36.06	63.51	500.00	-17.92
2400.00	H	24.90		4.28	32.18	0.00	61.36	1169.52	5334.27	-13.18
2400.00	V	25.10		4.28	32.18	0.00	61.56	1196.76	5334.27	-12.98

DATA PAGE	
MANUFACTURER	Chamberlain Group, Inc.
EUT	MyQ Garage Door Opener
MODEL NO.	B6765T
TEST	FCC §15.247, RSS-247 – Radiated Spurious Emissions – Harmonics in Restricted Bands
MODE	Wi-Fi – 802.11g - 2412MHz
DATE TESTED	February 10 – 14, 2020
TEST PERFORMED BY	Tylar Jozefczyk
NOTES	

RADIATED SPURIOUS EMISSIONS

Freq. (MHz)	Ant. Pol.	Meter Reading (dBμV)	Ambient	CBL Fac. (dB)	Ant. Fac. (dB)	Pre Amp (dB)	Peak Total dBμV/m at 3m	Peak Total μV/m at 3m	Peak Limit μV/m at 3m	Margin (dB)
4824.00	H	51.51	Ambient	5.70	34.16	-40.23	51.14	360.56	5000.00	-22.84
4824.00	V	51.08	Ambient	5.70	34.16	-40.23	50.71	343.14	5000.00	-23.27
12060.00	H	52.25	Ambient	8.61	38.68	-39.68	59.87	984.80	5000.00	-14.11
12060.00	V	51.83	Ambient	8.61	38.68	-39.68	59.45	938.32	5000.00	-14.53
14472.00	H	50.46	Ambient	9.58	39.61	-40.03	59.62	957.06	5000.00	-14.36
14472.00	V	50.72	Ambient	9.58	39.61	-40.03	59.88	986.14	5000.00	-14.10
19296.00	H	34.30	Ambient	2.21	40.38	-28.54	48.36	261.72	5000.00	-25.62
19296.00	V	34.40	Ambient	2.21	40.38	-28.54	48.46	264.75	5000.00	-25.52

DATA PAGE	
MANUFACTURER	Chamberlain Group, Inc.
EUT	MyQ Garage Door Opener
MODEL NO.	B6765T
TEST	FCC §15.247, RSS-247 – Radiated Spurious Emissions – Restricted Band Averages
MODE	Wi-Fi – 802.11g - 2412MHz
DATE TESTED	February 10 – 14, 2020
TEST PERFORMED BY	Tylar Jozefczyk
NOTES	

RADIATED SPURIOUS EMISSIONS

Freq. (MHz)	Ant. Pol.	Meter Reading (dBμV)	Ambient	CBL Fac. (dB)	Ant. Fac. (dB)	Pre Amp (dB)	Duty Cycle (dB)	Average Total dBμV/m at 3m	Average Total μV/m at 3m	Average Limit μV/m at 3m	Margin (dB)
4824.00	H	35.87	Ambient	5.70	34.16	-40.23	0.00	35.50	59.56	500.00	-18.48
4824.00	V	35.86	Ambient	5.70	34.16	-40.23	0.00	35.49	59.49	500.00	-18.49
12060.00	H	37.17	Ambient	8.61	38.68	-39.68	0.00	44.79	173.52	500.00	-9.19
12060.00	V	37.16	Ambient	8.61	38.68	-39.68	0.00	44.78	173.32	500.00	-9.20
14472.00	H	36.13	Ambient	9.58	39.61	-40.03	0.00	45.29	183.84	500.00	-8.69
14472.00	V	36.09	Ambient	9.58	39.61	-40.03	0.00	45.25	183.00	500.00	-8.73
19296.00	H	20.80	Ambient	2.21	40.38	-28.54	0.00	34.86	55.31	500.00	-19.12
19296.00	V	21.00	Ambient	2.21	40.38	-28.54	0.00	35.06	56.60	500.00	-18.92

DATA PAGE

MANUFACTURER	Chamberlain Group, Inc.
EUT	MyQ Garage Door Opener
MODEL NO.	B6765T
TEST	FCC §15.247, RSS-247 – Radiated Spurious Emissions – Harmonics in Non-Restricted Bands
MODE	Wi-Fi – 802.11g - 2437MHz
DATE TESTED	February 10 – 14, 2020
TEST PERFORMED BY	Tylar Jozefczyk
NOTES	

RADIATED SPURIOUS EMISSIONS

Freq. (MHz)	Ant. Pol.	Meter Reading (dBμV)	Ambient	CBL Fac. (dB)	Ant. Fac. (dB)	Pre Amp (dB)	Peak Total dBμV/m at 3m	Peak Total μV/m at 3m	Peak Limit μV/m at 3m	Margin (dB)
2437.00	H	55.37		4.30	32.25	0.00	91.93	39474.43		
2437.00	V	61.64		4.30	32.25	0.00	98.20	81248.60		
9748.00	H	41.87	Ambient	8.24	36.99	-39.56	47.54	238.36	8124.86	-30.65
9748.00	V	40.84	Ambient	8.24	36.99	-39.56	46.51	211.71	8124.86	-31.68
14622.00	H	40.53	Ambient	9.70	39.70	-40.17	49.76	307.68	8124.86	-28.43
14622.00	V	40.14	Ambient	9.70	39.70	-40.17	49.37	294.17	8124.86	-28.82
17059.00	H	41.02	Ambient	10.96	41.85	-38.77	55.06	566.19	8124.86	-23.14
17059.00	V	41.33	Ambient	10.96	41.85	-38.77	55.37	586.76	8124.86	-22.83
21933.00	H	23.80	Ambient	2.21	40.58	-29.36	37.22	72.62	500.00	-16.76
21933.00	V	24.10	Ambient	2.21	40.58	-29.36	37.52	75.17	500.00	-16.46
24370.00	H	24.40	Ambient	2.23	40.63	-30.37	36.89	69.90	500.00	-17.09
24370.00	V	25.10	Ambient	2.23	40.63	-30.37	37.59	75.77	500.00	-16.39

DATA PAGE	
MANUFACTURER	Chamberlain Group, Inc.
EUT	MyQ Garage Door Opener
MODEL NO.	B6765T
TEST	FCC §15.247, RSS-247 – Radiated Spurious Emissions – Harmonics in Restricted Bands
MODE	Wi-Fi – 802.11g - 2437MHz
DATE TESTED	February 10 – 14, 2020
TEST PERFORMED BY	Tylar Jozefczyk
NOTES	

RADIATED SPURIOUS EMISSIONS

Freq. (MHz)	Ant. Pol.	Meter Reading (dBμV)	Ambient	CBL Fac. (dB)	Ant. Fac. (dB)	Pre Amp (dB)	Peak Total dBμV/m at 3m	Peak Total μV/m at 3m	Peak Limit μV/m at 3m	Margin (dB)
4874.00	H	50.15	Ambient	5.73	34.14	-40.25	49.77	307.82	5000.00	-24.21
4874.00	V	50.53	Ambient	5.73	34.14	-40.25	50.15	321.59	5000.00	-23.83
7311.00	H	49.86	Ambient	6.88	35.90	-40.06	52.58	425.40	5000.00	-21.40
7311.00	V	50.34	Ambient	6.88	35.90	-40.06	53.06	449.57	5000.00	-20.92
12185.00	H	51.37	Ambient	8.93	38.69	-39.62	59.36	929.46	5000.00	-14.61
12185.00	V	50.87	Ambient	8.93	38.69	-39.62	58.86	877.47	5000.00	-15.11
19496.00	H	33.80	Ambient	2.22	40.39	-28.81	47.60	239.94	5000.00	-26.38
19496.00	V	33.80	Ambient	2.22	40.39	-28.81	47.60	239.94	5000.00	-26.38

DATA PAGE

MANUFACTURER	Chamberlain Group, Inc.
EUT	MyQ Garage Door Opener
MODEL NO.	B6765T
TEST	FCC §15.247, RSS-247 – Radiated Spurious Emissions – Restricted Band Averages
MODE	Wi-Fi – 802.11g - 2437MHz
DATE TESTED	February 10 – 14, 2020
TEST PERFORMED BY	Tylar Jozefczyk
NOTES	

RADIATED SPURIOUS EMISSIONS

Freq. (MHz)	Ant. Pol.	Meter Reading (dBμV)	Ambient	CBL Fac. (dB)	Ant. Fac. (dB)	Pre Amp (dB)	Duty Cycle (dB)	Average Total dBμV/m at 3m	Average Total μV/m at 3m	Average Limit μV/m at 3m	Margin (dB)
4874.00	H	35.55	Ambient	5.73	34.14	-40.25	0.00	35.17	57.32	500.00	-18.81
4874.00	V	35.50	Ambient	5.73	34.14	-40.25	0.00	35.12	56.99	500.00	-18.86
7311.00	H	34.83	Ambient	6.88	35.90	-40.06	0.00	37.55	75.39	500.00	-16.43
7311.00	V	34.78	Ambient	6.88	35.90	-40.06	0.00	37.50	74.95	500.00	-16.48
12185.00	H	36.32	Ambient	8.93	38.69	-39.62	0.00	44.31	164.34	500.00	-9.66
12185.00	V	36.33	Ambient	8.93	38.69	-39.62	0.00	44.32	164.52	500.00	-9.65
19496.00	H	20.40	Ambient	2.22	40.39	-28.81	0.00	34.20	51.30	500.00	-19.78
19496.00	V	21.20	Ambient	2.22	40.39	-28.81	0.00	35.00	56.25	500.00	-18.98

DATA PAGE	
MANUFACTURER	Chamberlain Group, Inc.
EUT	MyQ Garage Door Opener
MODEL NO.	B6765T
TEST	FCC §15.247, RSS-247 – Radiated Spurious Emissions – Harmonics in Non-Restricted Bands
MODE	Wi-Fi – 802.11g - 2462MHz
DATE TESTED	February 10 – 14, 2020
TEST PERFORMED BY	Tylar Jozefczyk
NOTES	

RADIATED SPURIOUS EMISSIONS

Freq. (MHz)	Ant. Pol.	Meter Reading (dBμV)	Ambient	CBL Fac. (dB)	Ant. Fac. (dB)	Pre Amp (dB)	Peak Total dBμV/m at 3m	Peak Total μV/m at 3m	Peak Limit μV/m at 3m	Margin (dB)
2462.00	H	61.25		4.32	32.30	0.00	97.87	78223.38		
2462.00	V	60.20		4.32	32.30	0.00	96.82	69316.49		
9848.00	H	40.70	Ambient	8.27	37.08	-39.53	46.52	211.74	7822.34	-31.35
9848.00	V	40.68	Ambient	8.27	37.08	-39.53	46.50	211.25	7822.34	-31.37
14772.00	H	39.88	Ambient	9.79	39.73	-40.30	49.11	285.30	7822.34	-28.76
14772.00	V	40.20	Ambient	9.79	39.73	-40.30	49.43	296.01	7822.34	-28.44
17234.00	H	37.90	Ambient	11.02	41.68	-38.96	51.64	382.04	7822.34	-26.22
17234.00	V	37.68	Ambient	11.02	41.68	-38.96	51.42	372.48	7822.34	-26.44
24620.00	H	24.20	Ambient	2.22	40.64	-30.71	36.34	65.62	500.00	-17.64
24620.00	V	24.30	Ambient	2.22	40.64	-30.71	36.44	66.38	500.00	-17.54

DATA PAGE

MANUFACTURER	Chamberlain Group, Inc.
EUT	MyQ Garage Door Opener
MODEL NO.	B6765T
TEST	FCC §15.247, RSS-247 – Radiated Spurious Emissions – Harmonics in Restricted Bands
MODE	Wi-Fi – 802.11g - 2462MHz
DATE TESTED	February 10 – 14, 2020
TEST PERFORMED BY	Tylar Jozefczyk
NOTES	

RADIATED SPURIOUS EMISSIONS

Freq. (MHz)	Ant. Pol.	Meter Reading (dBμV)	Ambient	CBL Fac. (dB)	Ant. Fac. (dB)	Pre Amp (dB)	Peak Total dBμV/m at 3m	Peak Total μV/m at 3m	Peak Limit μV/m at 3m	Margin (dB)
4924.00	H	50.18	Ambient	5.77	34.13	-40.27	49.80	309.13	5000.00	-24.18
4924.00	V	50.36	Ambient	5.77	34.13	-40.27	49.98	315.60	5000.00	-24.00
7386.00	H	50.27	Ambient	6.89	35.83	-40.05	52.95	443.96	5000.00	-21.03
7386.00	V	50.75	Ambient	6.89	35.83	-40.05	53.43	469.18	5000.00	-20.55
12310.00	H	50.66	Ambient	9.30	38.66	-39.57	59.04	895.50	5000.00	-14.94
12310.00	V	50.84	Ambient	9.30	38.66	-39.57	59.22	914.25	5000.00	-14.76
19696.00	H	34.70	Ambient	2.23	40.40	-28.48	48.84	276.85	5000.00	-25.13
19696.00	V	34.30	Ambient	2.23	40.40	-28.48	48.44	264.39	5000.00	-25.53
22158.00	H	34.20	Ambient	2.21	40.58	-29.30	47.70	242.65	5000.00	-26.28
22158.00	V	33.80	Ambient	2.21	40.58	-29.30	47.30	231.73	5000.00	-26.68

DATA PAGE

MANUFACTURER	Chamberlain Group, Inc.
EUT	MyQ Garage Door Opener
MODEL NO.	B6765T
TEST	FCC §15.247, RSS-247 – Radiated Spurious Emissions – Restricted Band Averages
MODE	Wi-Fi – 802.11g - 2462MHz
DATE TESTED	February 10 – 14, 2020
TEST PERFORMED BY	Tylar Jozefczyk
NOTES	

RADIATED SPURIOUS EMISSIONS

Freq. (MHz)	Ant. Pol.	Meter Reading (dBμV)	Ambient	CBL Fac. (dB)	Ant. Fac. (dB)	Pre Amp (dB)	Duty Cycle (dB)	Average Total dBμV/m at 3m	Average Total μV/m at 3m	Average Limit μV/m at 3m	Margin (dB)
4924.00	H	35.44	Ambient	5.77	34.13	-40.27	0.00	35.06	56.64	500.00	-18.92
4924.00	V	35.42	Ambient	5.77	34.13	-40.27	0.00	35.04	56.51	500.00	-18.94
7386.00	H	35.26	Ambient	6.89	35.83	-40.05	0.00	37.94	78.86	500.00	-16.04
7386.00	V	35.22	Ambient	6.89	35.83	-40.05	0.00	37.90	78.50	500.00	-16.08
12310.00	H	36.08	Ambient	9.30	38.66	-39.57	0.00	44.46	167.13	500.00	-9.52
12310.00	V	36.09	Ambient	9.30	38.66	-39.57	0.00	44.47	167.33	500.00	-9.51
19696.00	H	20.60	Ambient	2.23	40.40	-28.48	0.00	34.74	54.61	500.00	-19.23
19696.00	V	20.80	Ambient	2.23	40.40	-28.48	0.00	34.94	55.88	500.00	-19.03
22158.00	H	21.00	Ambient	2.21	40.58	-29.30	0.00	34.50	53.09	500.00	-19.48
22158.00	V	21.20	Ambient	2.21	40.58	-29.30	0.00	34.70	54.32	500.00	-19.28

DATA PAGE

MANUFACTURER	Chamberlain Group, Inc.
EUT	MyQ Garage Door Opener
MODEL NO.	B6765T
TEST	FCC §15.247, RSS-247 – Radiated Spurious Emissions – Harmonics in Non-Restricted Bands
MODE	Wi-Fi – 802.11n - 2412MHz
DATE TESTED	February 10 – 14, 2020
TEST PERFORMED BY	Tylar Jozefczyk
NOTES	

RADIATED SPURIOUS EMISSIONS

Freq. (MHz)	Ant. Pol.	Meter Reading (dBμV)	Ambient	CBL Fac. (dB)	Ant. Fac. (dB)	Pre Amp (dB)	Peak Total dBμV/m at 3m	Peak Total μV/m at 3m	Peak Limit μV/m at 3m	Margin (dB)
2412.00	H	54.16		4.29	32.20	0.00	90.65	34085.90		
2412.00	V	58.42		4.29	32.20	0.00	94.91	55664.05		
7236.00	H	39.65	Ambient	6.86	35.92	-40.06	42.37	131.39	5566.41	-32.54
7236.00	V	39.60	Ambient	6.86	35.92	-40.06	42.32	130.63	5566.41	-32.59
9648.00	H	40.63	Ambient	8.21	36.89	-39.58	46.15	203.08	5566.41	-28.76
9648.00	V	40.93	Ambient	8.21	36.89	-39.58	46.45	210.22	5566.41	-28.46
16884.00	H	41.05	Ambient	10.95	42.01	-38.82	55.19	574.89	5566.41	-19.72
16884.00	V	40.40	Ambient	10.95	42.01	-38.82	54.54	533.44	5566.41	-20.37
21708.00	H	25.30	Ambient	2.23	40.56	-28.88	39.22	91.37	500.00	-14.76
21708.00	V	23.80	Ambient	2.23	40.56	-28.88	37.72	76.88	500.00	-16.26
24120.00	H	23.60	Ambient	2.24	40.62	-30.50	35.96	62.78	500.00	-18.02
24120.00	V	23.40	Ambient	2.24	40.62	-30.50	35.76	61.35	500.00	-18.22
2400.00	H	18.92		4.28	32.18	0.00	55.38	587.50	5566.41	-19.53
2400.00	V	22.51		4.28	32.18	0.00	58.97	888.19	5566.41	-15.94

DATA PAGE

MANUFACTURER	Chamberlain Group, Inc.
EUT	MyQ Garage Door Opener
MODEL NO.	B6765T
TEST	FCC §15.247, RSS-247 – Radiated Spurious Emissions – Harmonics in Restricted Bands
MODE	Wi-Fi – 802.11n - 2412MHz
DATE TESTED	February 10 – 14, 2020
TEST PERFORMED BY	Tylar Jozefczyk
NOTES	

RADIATED SPURIOUS EMISSIONS

Freq. (MHz)	Ant. Pol.	Meter Reading (dBμV)	Ambient	CBL Fac. (dB)	Ant. Fac. (dB)	Pre Amp (dB)	Peak Total dBμV/m at 3m	Peak Total μV/m at 3m	Peak Limit μV/m at 3m	Margin (dB)
4824.00	H	51.03	Ambient	5.70	34.16	-40.23	50.66	341.17	5000.00	-23.32
4824.00	V	50.53	Ambient	5.70	34.16	-40.23	50.16	322.09	5000.00	-23.82
12060.00	H	52.07	Ambient	8.61	38.68	-39.68	59.69	964.60	5000.00	-14.29
12060.00	V	52.05	Ambient	8.61	38.68	-39.68	59.67	962.39	5000.00	-14.31
14472.00	H	50.26	Ambient	9.58	39.61	-40.03	59.42	935.28	5000.00	-14.56
14472.00	V	51.48	Ambient	9.58	39.61	-40.03	60.64	1076.32	5000.00	-13.34
19296.00	H	35.00	Ambient	2.21	40.38	-28.54	49.06	283.69	5000.00	-24.92
19296.00	V	35.10	Ambient	2.21	40.38	-28.54	49.16	286.97	5000.00	-24.82

DATA PAGE	
MANUFACTURER	Chamberlain Group, Inc.
EUT	MyQ Garage Door Opener
MODEL NO.	B6765T
TEST	FCC §15.247, RSS-247 – Radiated Spurious Emissions – Restricted Band Averages
MODE	Wi-Fi – 802.11n - 2412MHz
DATE TESTED	February 10 – 14, 2020
TEST PERFORMED BY	Tylar Jozefczyk
NOTES	

RADIATED SPURIOUS EMISSIONS

Freq. (MHz)	Ant. Pol.	Meter Reading (dBμV)	Ambient	CBL Fac. (dB)	Ant. Fac. (dB)	Pre Amp (dB)	Duty Cycle (dB)	Average Total dBμV/m at 3m	Average Total μV/m at 3m	Average Limit μV/m at 3m	Margin (dB)
4824.00	H	35.90	Ambient	5.70	34.16	-40.23	0.00	35.53	59.77	500.00	-18.45
4824.00	V	35.93	Ambient	5.70	34.16	-40.23	0.00	35.56	59.98	500.00	-18.42
12060.00	H	37.06	Ambient	8.61	38.68	-39.68	0.00	44.68	171.34	500.00	-9.30
12060.00	V	37.07	Ambient	8.61	38.68	-39.68	0.00	44.69	171.53	500.00	-9.29
14472.00	H	36.27	Ambient	9.58	39.61	-40.03	0.00	45.43	186.83	500.00	-8.55
14472.00	V	35.72	Ambient	9.58	39.61	-40.03	0.00	44.88	175.36	500.00	-9.10
19296.00	H	20.80	Ambient	2.21	40.38	-28.54	0.00	34.86	55.31	500.00	-19.12
19296.00	V	21.10	Ambient	2.21	40.38	-28.54	0.00	35.16	57.26	500.00	-18.82

DATA PAGE

MANUFACTURER	Chamberlain Group, Inc.
EUT	MyQ Garage Door Opener
MODEL NO.	B6765T
TEST	FCC §15.247, RSS-247 – Radiated Spurious Emissions – Harmonics in Non-Restricted Bands
MODE	Wi-Fi – 802.11n - 2437MHz
DATE TESTED	February 10 – 14, 2020
TEST PERFORMED BY	Tylar Jozefczyk
NOTES	

RADIATED SPURIOUS EMISSIONS

Freq. (MHz)	Ant. Pol.	Meter Reading (dBμV)	Ambient	CBL Fac. (dB)	Ant. Fac. (dB)	Pre Amp (dB)	Peak Total dBμV/m at 3m	Peak Total μV/m at 3m	Peak Limit μV/m at 3m	Margin (dB)
2437.00	H	56.90		4.30	32.25	0.00	93.46	47077.77		
2437.00	V	55.67		4.30	32.25	0.00	92.23	40861.65		
9748.00	H	40.63	Ambient	8.24	36.99	-39.56	46.30	206.65	4707.78	-27.15
9748.00	V	40.11	Ambient	8.24	36.99	-39.56	45.78	194.64	4707.78	-27.67
14622.00	H	40.82	Ambient	9.70	39.70	-40.17	50.05	318.13	4707.78	-23.40
14622.00	V	40.69	Ambient	9.70	39.70	-40.17	49.92	313.40	4707.78	-23.53
17059.00	H	41.03	Ambient	10.96	41.85	-38.77	55.07	566.84	4707.78	-18.39
17059.00	V	41.28	Ambient	10.96	41.85	-38.77	55.32	583.39	4707.78	-18.14
21933.00	H	24.60	Ambient	2.21	40.58	-29.36	38.02	79.62	500.00	-15.96
21933.00	V	24.30	Ambient	2.21	40.58	-29.36	37.72	76.92	500.00	-16.26
24370.00	H	24.70	Ambient	2.23	40.63	-30.37	37.19	72.36	500.00	-16.79
24370.00	V	24.50	Ambient	2.23	40.63	-30.37	36.99	70.71	500.00	-16.99

DATA PAGE

MANUFACTURER	Chamberlain Group, Inc.
EUT	MyQ Garage Door Opener
MODEL NO.	B6765T
TEST	FCC §15.247, RSS-247 – Radiated Spurious Emissions – Harmonics in Restricted Bands
MODE	Wi-Fi – 802.11n - 2437MHz
DATE TESTED	February 10 – 14, 2020
TEST PERFORMED BY	Tylar Jozefczyk
NOTES	

RADIATED SPURIOUS EMISSIONS

Freq. (MHz)	Ant. Pol.	Meter Reading (dBμV)	Ambient	CBL Fac. (dB)	Ant. Fac. (dB)	Pre Amp (dB)	Peak Total dBμV/m at 3m	Peak Total μV/m at 3m	Peak Limit μV/m at 3m	Margin (dB)
4874.00	H	50.45	Ambient	5.73	34.14	-40.25	50.07	318.64	5000.00	-23.91
4874.00	V	50.52	Ambient	5.73	34.14	-40.25	50.14	321.22	5000.00	-23.84
7311.00	H	49.65	Ambient	6.88	35.90	-40.06	52.37	415.24	5000.00	-21.61
7311.00	V	49.83	Ambient	6.88	35.90	-40.06	52.55	423.93	5000.00	-21.43
12185.00	H	50.77	Ambient	8.93	38.69	-39.62	58.76	867.42	5000.00	-15.21
12185.00	V	51.08	Ambient	8.93	38.69	-39.62	59.07	898.94	5000.00	-14.90
19496.00	H	33.80	Ambient	2.22	40.39	-28.81	47.60	239.94	5000.00	-26.38
19496.00	V	33.90	Ambient	2.22	40.39	-28.81	47.70	242.71	5000.00	-26.28

DATA PAGE	
MANUFACTURER	Chamberlain Group, Inc.
EUT	MyQ Garage Door Opener
MODEL NO.	B6765T
TEST	FCC §15.247, RSS-247 – Radiated Spurious Emissions – Restricted Band Averages
MODE	Wi-Fi – 802.11n - 2437MHz
DATE TESTED	February 10 – 14, 2020
TEST PERFORMED BY	Tylar Jozefczyk
NOTES	

RADIATED SPURIOUS EMISSIONS

Freq. (MHz)	Ant. Pol.	Meter Reading (dBμV)	Ambient	CBL Fac. (dB)	Ant. Fac. (dB)	Pre Amp (dB)	Duty Cycle (dB)	Average Total dBμV/m at 3m	Average Total μV/m at 3m	Average Limit μV/m at 3m	Margin (dB)
4874.00	H	35.54	Ambient	5.73	34.14	-40.25	0.00	35.16	57.25	500.00	-18.82
4874.00	V	35.68	Ambient	5.73	34.14	-40.25	0.00	35.30	58.18	500.00	-18.68
7311.00	H	34.76	Ambient	6.88	35.90	-40.06	0.00	37.48	74.78	500.00	-16.50
7311.00	V	34.78	Ambient	6.88	35.90	-40.06	0.00	37.50	74.95	500.00	-16.48
12185.00	H	36.34	Ambient	8.93	38.69	-39.62	0.00	44.33	164.71	500.00	-9.64
12185.00	V	36.33	Ambient	8.93	38.69	-39.62	0.00	44.32	164.52	500.00	-9.65
19496.00	H	20.50	Ambient	2.22	40.39	-28.81	0.00	34.30	51.89	500.00	-19.68
19496.00	V	20.90	Ambient	2.22	40.39	-28.81	0.00	34.70	54.34	500.00	-19.28

DATA PAGE	
MANUFACTURER	Chamberlain Group, Inc.
EUT	MyQ Garage Door Opener
MODEL NO.	B6765T
TEST	FCC §15.247, RSS-247 – Radiated Spurious Emissions – Harmonics in Non-Restricted Bands
MODE	Wi-Fi – 802.11n - 2462MHz
DATE TESTED	February 10 – 14, 2020
TEST PERFORMED BY	Tylar Jozefczyk
NOTES	

RADIATED SPURIOUS EMISSIONS

Freq. (MHz)	Ant. Pol.	Meter Reading (dBμV)	Ambient	CBL Fac. (dB)	Ant. Fac. (dB)	Pre Amp (dB)	Peak Total dBμV/m at 3m	Peak Total μV/m at 3m	Peak Limit μV/m at 3m	Margin (dB)
2462.00	H	53.99		4.32	32.30	0.00	90.61	33910.68		
2462.00	V	50.84		4.32	32.30	0.00	87.46	23595.90		
9848.00	H	40.91	Ambient	8.27	37.08	-39.53	46.73	216.92	3391.07	-23.88
9848.00	V	40.60	Ambient	8.27	37.08	-39.53	46.42	209.32	3391.07	-24.19
14772.00	H	40.33	Ambient	9.79	39.73	-40.30	49.56	300.47	3391.07	-21.05
14772.00	V	40.31	Ambient	9.79	39.73	-40.30	49.54	299.78	3391.07	-21.07
17234.00	H	40.14	Ambient	11.02	41.68	-38.96	53.88	494.43	3391.07	-16.72
17234.00	V	40.68	Ambient	11.02	41.68	-38.96	54.42	526.14	3391.07	-16.18
24620.00	H	24.80	Ambient	2.22	40.64	-30.71	36.94	70.31	500.00	-17.04
24620.00	V	25.10	Ambient	2.22	40.64	-30.71	37.24	72.78	500.00	-16.74

DATA PAGE

MANUFACTURER	Chamberlain Group, Inc.
EUT	MyQ Garage Door Opener
MODEL NO.	B6765T
TEST	FCC §15.247, RSS-247 – Radiated Spurious Emissions – Harmonics in Restricted Bands
MODE	Wi-Fi – 802.11n - 2462MHz
DATE TESTED	February 10 – 14, 2020
TEST PERFORMED BY	Tylar Jozefczyk
NOTES	

RADIATED SPURIOUS EMISSIONS

Freq. (MHz)	Ant. Pol.	Meter Reading (dBμV)	Ambient	CBL Fac. (dB)	Ant. Fac. (dB)	Pre Amp (dB)	Peak Total dBμV/m at 3m	Peak Total μV/m at 3m	Peak Limit μV/m at 3m	Margin (dB)
4924.00	H	50.43	Ambient	5.77	34.13	-40.27	50.05	318.16	5000.00	-23.93
4924.00	V	50.14	Ambient	5.77	34.13	-40.27	49.76	307.71	5000.00	-24.22
7386.00	H	49.88	Ambient	6.89	35.83	-40.05	52.56	424.47	5000.00	-21.42
7386.00	V	50.26	Ambient	6.89	35.83	-40.05	52.94	443.45	5000.00	-21.04
12310.00	H	50.83	Ambient	9.30	38.66	-39.57	59.21	913.20	5000.00	-14.77
12310.00	V	50.61	Ambient	9.30	38.66	-39.57	58.99	890.36	5000.00	-14.99
19696.00	H	34.10	Ambient	2.23	40.40	-28.48	48.24	258.37	5000.00	-25.73
19696.00	V	33.50	Ambient	2.23	40.40	-28.48	47.64	241.13	5000.00	-26.33
22158.00	H	34.50	Ambient	2.21	40.58	-29.30	48.00	251.18	5000.00	-25.98
22158.00	V	34.40	Ambient	2.21	40.58	-29.30	47.90	248.30	5000.00	-26.08

DATA PAGE

MANUFACTURER	Chamberlain Group, Inc.
EUT	MyQ Garage Door Opener
MODEL NO.	B6765T
TEST	FCC §15.247, RSS-247 – Radiated Spurious Emissions – Restricted Band Averages
MODE	Wi-Fi – 802.11n - 2462MHz
DATE TESTED	February 10 – 14, 2020
TEST PERFORMED BY	Tylar Jozefczyk
NOTES	

RADIATED SPURIOUS EMISSIONS

Freq. (MHz)	Ant. Pol.	Meter Reading (dBμV)	Ambient	CBL Fac. (dB)	Ant. Fac. (dB)	Pre Amp (dB)	Duty Cycle (dB)	Average Total dBμV/m at 3m	Average Total μV/m at 3m	Average Limit μV/m at 3m	Margin (dB)
4924.00	H	35.43	Ambient	5.77	34.13	-40.27	0.00	35.05	56.58	500.00	-18.93
4924.00	V	35.42	Ambient	5.77	34.13	-40.27	0.00	35.04	56.51	500.00	-18.94
7386.00	H	35.03	Ambient	6.89	35.83	-40.05	0.00	37.71	76.80	500.00	-16.27
7386.00	V	35.02	Ambient	6.89	35.83	-40.05	0.00	37.70	76.71	500.00	-16.28
12310.00	H	36.04	Ambient	9.30	38.66	-39.57	0.00	44.42	166.37	500.00	-9.56
12310.00	V	36.08	Ambient	9.30	38.66	-39.57	0.00	44.46	167.13	500.00	-9.52
19696.00	H	20.70	Ambient	2.23	40.40	-28.48	0.00	34.84	55.24	500.00	-19.13
19696.00	V	21.10	Ambient	2.23	40.40	-28.48	0.00	35.24	57.84	500.00	-18.73
22158.00	H	21.10	Ambient	2.21	40.58	-29.30	0.00	34.60	53.70	500.00	-19.38
22158.00	V	21.20	Ambient	2.21	40.58	-29.30	0.00	34.70	54.32	500.00	-19.28

DATA PAGE	
MANUFACTURER	Chamberlain Group, Inc.
EUT	MyQ Garage Door Opener
MODEL NO.	B6765T
TEST	FCC §15.247, RSS-247 – Radiated Spurious Emissions – Harmonics in Non-Restricted Bands
MODE	BLE – 2402MHz
DATE TESTED	February 10 – 14, 2020
TEST PERFORMED BY	Tylar Jozefczyk
NOTES	

RADIATED SPURIOUS EMISSIONS

Freq. (MHz)	Ant. Pol.	Meter Reading (dBμV)	Ambient	CBL Fac. (dB)	Ant. Fac. (dB)	Pre Amp (dB)	Peak Total dBμV/m at 3m	Peak Total μV/m at 3m	Peak Limit μV/m at 3m	Margin (dB)
2402.00	H	55.08		4.28	32.18	0.00	91.55	37780.61		
2402.00	V	58.52		4.28	32.18	0.00	94.99	56139.56		
7206.00	H	39.04	Ambient	6.86	35.92	-40.07	41.75	122.33	5613.96	-33.24
7206.00	V	39.10	Ambient	6.86	35.92	-40.07	41.81	123.17	5613.96	-33.18
9608.00	H	40.57	Ambient	8.20	36.84	-39.59	46.02	200.05	5613.96	-28.96
9608.00	V	40.60	Ambient	8.20	36.84	-39.59	46.05	200.75	5613.96	-28.93
14412.00	H	40.78	Ambient	9.56	39.56	-39.98	49.93	313.59	5613.96	-25.06
14412.00	V	40.77	Ambient	9.56	39.56	-39.98	49.92	313.23	5613.96	-25.07
16814.00	H	40.38	Ambient	10.94	41.98	-38.90	54.40	524.98	5613.96	-20.58
16814.00	V	40.39	Ambient	10.94	41.98	-38.90	54.41	525.59	5613.96	-20.57
21618.00	H	24.50	Ambient	2.25	40.56	-28.89	38.42	83.34	500.00	-15.56
21618.00	V	24.50	Ambient	2.25	40.56	-28.89	38.42	83.34	500.00	-15.56
24020.00	H	24.80	Ambient	2.24	40.62	-30.21	37.45	74.54	500.00	-16.53
24020.00	V	24.80	Ambient	2.24	40.62	-30.21	37.45	74.54	500.00	-16.53
2400.00	H	12.08		4.28	32.18	0.00	48.54	267.31	5613.96	-26.45
2400.00	V	10.94		4.28	32.18	0.00	47.40	234.43	5613.96	-27.59

DATA PAGE	
MANUFACTURER	Chamberlain Group, Inc.
EUT	MyQ Garage Door Opener
MODEL NO.	B6765T
TEST	FCC §15.247, RSS-247 – Radiated Spurious Emissions – Harmonics in Restricted Bands
MODE	BLE – 2402MHz
DATE TESTED	February 10 – 14, 2020
TEST PERFORMED BY	Tylar Jozefczyk
NOTES	

RADIATED SPURIOUS EMISSIONS

Freq. (MHz)	Ant. Pol.	Meter Reading (dBμV)	Ambient	CBL Fac. (dB)	Ant. Fac. (dB)	Pre Amp (dB)	Peak Total dBμV/m at 3m	Peak Total μV/m at 3m	Peak Limit μV/m at 3m	Margin (dB)
4804.00	H	50.81	Ambient	5.69	34.18	-40.22	50.45	333.06	5000.00	-23.53
4804.00	V	50.53	Ambient	5.69	34.18	-40.22	50.17	322.49	5000.00	-23.81
12010.00	H	51.65	Ambient	8.62	38.67	-39.70	59.25	917.16	5000.00	-14.73
12010.00	V	52.06	Ambient	8.62	38.67	-39.70	59.66	961.49	5000.00	-14.32
19216.00	H	34.40	Ambient	2.21	40.38	-28.78	48.20	257.17	5000.00	-25.77
19216.00	V	35.10	Ambient	2.21	40.38	-28.78	48.90	278.75	5000.00	-25.07

DATA PAGE

MANUFACTURER	Chamberlain Group, Inc.
EUT	MyQ Garage Door Opener
MODEL NO.	B6765T
TEST	FCC §15.247, RSS-247 – Radiated Spurious Emissions – Restricted Band Averages
MODE	BLE – 2402MHz
DATE TESTED	February 10 – 14, 2020
TEST PERFORMED BY	Tylar Jozefczyk
NOTES	

RADIATED SPURIOUS EMISSIONS

Freq. (MHz)	Ant. Pol.	Meter Reading (dBμV)	Ambient	CBL Fac. (dB)	Ant. Fac. (dB)	Pre Amp (dB)	Duty Cycle (dB)	Average Total dBμV/m at 3m	Average Total μV/m at 3m	Average Limit μV/m at 3m	Margin (dB)
4804.00	H	35.31	Ambient	5.69	34.18	-40.22	0.00	34.95	55.91	500.00	-19.03
4804.00	V	35.34	Ambient	5.69	34.18	-40.22	0.00	34.98	56.11	500.00	-19.00
12010.00	H	36.75	Ambient	8.62	38.67	-39.70	0.00	44.35	164.99	500.00	-9.63
12010.00	V	36.74	Ambient	8.62	38.67	-39.70	0.00	44.34	164.80	500.00	-9.64
19216.00	H	20.80	Ambient	2.21	40.38	-28.78	0.00	34.60	53.73	500.00	-19.37
19216.00	V	20.70	Ambient	2.21	40.38	-28.78	0.00	34.50	53.12	500.00	-19.47

DATA PAGE

MANUFACTURER	Chamberlain Group, Inc.
EUT	MyQ Garage Door Opener
MODEL NO.	B6765T
TEST	FCC §15.247, RSS-247 – Radiated Spurious Emissions – Harmonics in Non-Restricted Bands
MODE	BLE – 2440MHz
DATE TESTED	February 10 – 14, 2020
TEST PERFORMED BY	Tylar Jozefczyk
NOTES	

RADIATED SPURIOUS EMISSIONS

Freq. (MHz)	Ant. Pol.	Meter Reading (dBμV)	Ambient	CBL Fac. (dB)	Ant. Fac. (dB)	Pre Amp (dB)	Peak Total dBμV/m at 3m	Peak Total μV/m at 3m	Peak Limit μV/m at 3m	Margin (dB)
2440.00	H	52.86		4.31	32.26	0.00	89.42	29593.93		
2440.00	V	60.26		4.31	32.26	0.00	96.82	69374.94		
9760.00	H	40.27	Ambient	8.24	37.00	-39.55	45.96	198.64	6937.49	-30.86
9760.00	V	40.72	Ambient	8.24	37.00	-39.55	46.41	209.20	6937.49	-30.41
14640.00	H	40.14	Ambient	9.71	39.71	-40.18	49.37	294.19	6937.49	-27.45
14640.00	V	40.20	Ambient	9.71	39.71	-40.18	49.43	296.23	6937.49	-27.39
17080.00	H	40.77	Ambient	10.97	41.81	-38.79	54.76	547.07	6937.49	-22.06
17080.00	V	40.19	Ambient	10.97	41.81	-38.79	54.18	511.73	6937.49	-22.64
21960.00	H	24.90	Ambient	2.20	40.58	-29.39	38.29	82.13	500.00	-15.69
21960.00	V	25.40	Ambient	2.20	40.58	-29.39	38.79	87.00	500.00	-15.19
24400.00	H	25.10	Ambient	2.22	40.63	-30.45	37.51	75.06	500.00	-16.47
24400.00	V	24.80	Ambient	2.22	40.63	-30.45	37.21	72.51	500.00	-16.77

DATA PAGE	
MANUFACTURER	Chamberlain Group, Inc.
EUT	MyQ Garage Door Opener
MODEL NO.	B6765T
TEST	FCC §15.247, RSS-247 – Radiated Spurious Emissions – Harmonics in Restricted Bands
MODE	BLE – 2440MHz
DATE TESTED	February 10 – 14, 2020
TEST PERFORMED BY	Tylar Jozefczyk
NOTES	

RADIATED SPURIOUS EMISSIONS

Freq. (MHz)	Ant. Pol.	Meter Reading (dBμV)	Ambient	CBL Fac. (dB)	Ant. Fac. (dB)	Pre Amp (dB)	Peak Total dBμV/m at 3m	Peak Total μV/m at 3m	Peak Limit μV/m at 3m	Margin (dB)
4880.00	H	50.38	Ambient	5.74	34.13	-40.25	50.00	316.09	5000.00	-23.98
4880.00	V	50.16	Ambient	5.74	34.13	-40.25	49.78	308.18	5000.00	-24.20
7320.00	H	49.73	Ambient	6.88	35.89	-40.06	52.44	418.83	5000.00	-21.54
7320.00	V	49.59	Ambient	6.88	35.89	-40.06	52.30	412.13	5000.00	-21.68
12200.00	H	51.23	Ambient	8.94	38.69	-39.62	59.24	915.76	5000.00	-14.74
12200.00	V	51.38	Ambient	8.94	38.69	-39.62	59.39	931.72	5000.00	-14.59
19520.00	H	34.30	Ambient	2.22	40.39	-28.74	48.17	256.22	5000.00	-25.81
19520.00	V	34.30	Ambient	2.22	40.39	-28.74	48.17	256.22	5000.00	-25.81

DATA PAGE

MANUFACTURER	Chamberlain Group, Inc.
EUT	MyQ Garage Door Opener
MODEL NO.	B6765T
TEST	FCC §15.247, RSS-247 – Radiated Spurious Emissions – Restricted Band Averages
MODE	BLE – 2440MHz
DATE TESTED	February 10 – 14, 2020
TEST PERFORMED BY	Tylar Jozefczyk
NOTES	

RADIATED SPURIOUS EMISSIONS

Freq. (MHz)	Ant. Pol.	Meter Reading (dBμV)	Ambient	CBL Fac. (dB)	Ant. Fac. (dB)	Pre Amp (dB)	Duty Cycle (dB)	Average Total dBμV/m at 3m	Average Total μV/m at 3m	Average Limit μV/m at 3m	Margin (dB)
4880.00	H	35.37	Ambient	5.74	34.13	-40.25	0.00	34.99	56.14	500.00	-18.99
4880.00	V	35.37	Ambient	5.74	34.13	-40.25	0.00	34.99	56.14	500.00	-18.99
7320.00	H	34.51	Ambient	6.88	35.89	-40.06	0.00	37.22	72.62	500.00	-16.76
7320.00	V	34.52	Ambient	6.88	35.89	-40.06	0.00	37.23	72.70	500.00	-16.75
12200.00	H	36.32	Ambient	8.94	38.69	-39.62	0.00	44.33	164.54	500.00	-9.65
12200.00	V	36.34	Ambient	8.94	38.69	-39.62	0.00	44.35	164.92	500.00	-9.63
19520.00	H	20.10	Ambient	2.22	40.39	-28.74	0.00	33.97	49.96	500.00	-20.01
19520.00	V	20.30	Ambient	2.22	40.39	-28.74	0.00	34.17	51.12	500.00	-19.81

DATA PAGE	
MANUFACTURER	Chamberlain Group, Inc.
EUT	MyQ Garage Door Opener
MODEL NO.	B6765T
TEST	FCC §15.247, RSS-247 – Radiated Spurious Emissions – Harmonics in Non-Restricted Bands
MODE	BLE – 2480MHz
DATE TESTED	February 10 – 14, 2020
TEST PERFORMED BY	Tylar Jozefczyk
NOTES	

RADIATED SPURIOUS EMISSIONS

Freq. (MHz)	Ant. Pol.	Meter Reading (dBμV)	Ambient	CBL Fac. (dB)	Ant. Fac. (dB)	Pre Amp (dB)	Peak Total dBμV/m at 3m	Peak Total μV/m at 3m	Peak Limit μV/m at 3m	Margin (dB)
2480.00	H	54.84		4.33	32.33	0.00	91.50	37570.49		
2480.00	V	55.15		4.33	32.33	0.00	91.81	38935.60		
9920.00	H	41.06	Ambient	8.29	37.14	-39.52	46.97	222.99	3893.56	-24.84
9920.00	V	40.55	Ambient	8.29	37.14	-39.52	46.46	210.27	3893.56	-25.35
14880.00	H	40.62	Ambient	9.84	39.77	-40.40	49.83	310.04	3893.56	-21.98
14880.00	V	40.30	Ambient	9.84	39.77	-40.40	49.51	298.83	3893.56	-22.30
17360.00	H	40.26	Ambient	10.98	41.68	-39.10	53.82	490.69	3893.56	-17.99
17360.00	V	40.08	Ambient	10.98	41.68	-39.10	53.64	480.63	3893.56	-18.17
24800.00	H	24.80	Ambient	2.21	40.64	-31.18	36.47	66.64	500.00	-17.50
24800.00	V	25.00	Ambient	2.21	40.64	-31.18	36.67	68.19	500.00	-17.30

DATA PAGE

MANUFACTURER	Chamberlain Group, Inc.
EUT	MyQ Garage Door Opener
MODEL NO.	B6765T
TEST	FCC §15.247, RSS-247 – Radiated Spurious Emissions – Harmonics in Restricted Bands
MODE	BLE – 2480MHz
DATE TESTED	February 10 – 14, 2020
TEST PERFORMED BY	Tylar Jozefczyk
NOTES	

RADIATED SPURIOUS EMISSIONS

Freq. (MHz)	Ant. Pol.	Meter Reading (dBμV)	Ambient	CBL Fac. (dB)	Ant. Fac. (dB)	Pre Amp (dB)	Peak Total dBμV/m at 3m	Peak Total μV/m at 3m	Peak Limit μV/m at 3m	Margin (dB)
4960.00	H	50.37	Ambient	5.79	34.13	-40.28	50.01	316.44	5000.00	-23.97
4960.00	V	50.42	Ambient	5.79	34.13	-40.28	50.06	318.26	5000.00	-23.92
7440.00	H	49.34	Ambient	6.91	35.80	-40.05	52.00	398.03	5000.00	-21.98
7440.00	V	49.48	Ambient	6.91	35.80	-40.05	52.14	404.50	5000.00	-21.84
12400.00	H	50.26	Ambient	9.40	38.63	-39.54	58.75	865.94	5000.00	-15.23
12400.00	V	50.67	Ambient	9.40	38.63	-39.54	59.16	907.80	5000.00	-14.82
19840.00	H	34.80	Ambient	2.23	40.40	-28.39	49.04	283.25	5000.00	-24.94
19840.00	V	34.50	Ambient	2.23	40.40	-28.39	48.74	273.63	5000.00	-25.24
22320.00	H	35.10	Ambient	2.23	40.59	-29.29	48.62	269.72	5000.00	-25.36
22320.00	V	34.60	Ambient	2.23	40.59	-29.29	48.12	254.64	5000.00	-25.86

DATA PAGE


MANUFACTURER	Chamberlain Group, Inc.
EUT	MyQ Garage Door Opener
MODEL NO.	B6765T
TEST	FCC §15.247, RSS-247 – Radiated Spurious Emissions – Restricted Band Averages
MODE	BLE – 2480MHz
DATE TESTED	February 10 – 14, 2020
TEST PERFORMED BY	Tylar Jozefczyk
NOTES	

RADIATED SPURIOUS EMISSIONS

Freq. (MHz)	Ant. Pol.	Meter Reading (dBμV)	Ambient	CBL Fac. (dB)	Ant. Fac. (dB)	Pre Amp (dB)	Duty Cycle (dB)	Average Total dBμV/m at 3m	Average Total μV/m at 3m	Average Limit μV/m at 3m	Margin (dB)
4960.00	H	35.19	Ambient	5.79	34.13	-40.28	0.00	34.83	55.12	500.00	-19.15
4960.00	V	35.18	Ambient	5.79	34.13	-40.28	0.00	34.82	55.05	500.00	-19.16
7440.00	H	34.98	Ambient	6.91	35.80	-40.05	0.00	37.64	76.19	500.00	-16.34
7440.00	V	34.92	Ambient	6.91	35.80	-40.05	0.00	37.58	75.67	500.00	-16.40
12400.00	H	36.70	Ambient	9.40	38.63	-39.54	0.00	45.19	181.76	500.00	-8.79
12400.00	V	36.75	Ambient	9.40	38.63	-39.54	0.00	45.24	182.81	500.00	-8.74
19840.00	H	20.00	Ambient	2.23	40.40	-28.39	0.00	34.24	51.54	500.00	-19.74
19840.00	V	20.30	Ambient	2.23	40.40	-28.39	0.00	34.54	53.35	500.00	-19.44
22320.00	H	21.00	Ambient	2.23	40.59	-29.29	0.00	34.52	53.20	500.00	-19.46
22320.00	V	20.90	Ambient	2.23	40.59	-29.29	0.00	34.42	52.59	500.00	-19.56

DATA PAGE	
MANUFACTURER	Chamberlain Group, Inc.
EUT	MyQ Garage Door Opener
MODEL NO.	B6765T
TEST	FCC §15.247, RSS-247 – Band Edge
MODE	Wi-Fi – 802.11b - 2412MHz
DATE TESTED	February 10 – 14, 2020
TEST PERFORMED BY	Tylar Jozefczyk
NOTES	


BAND EDGE – LOW

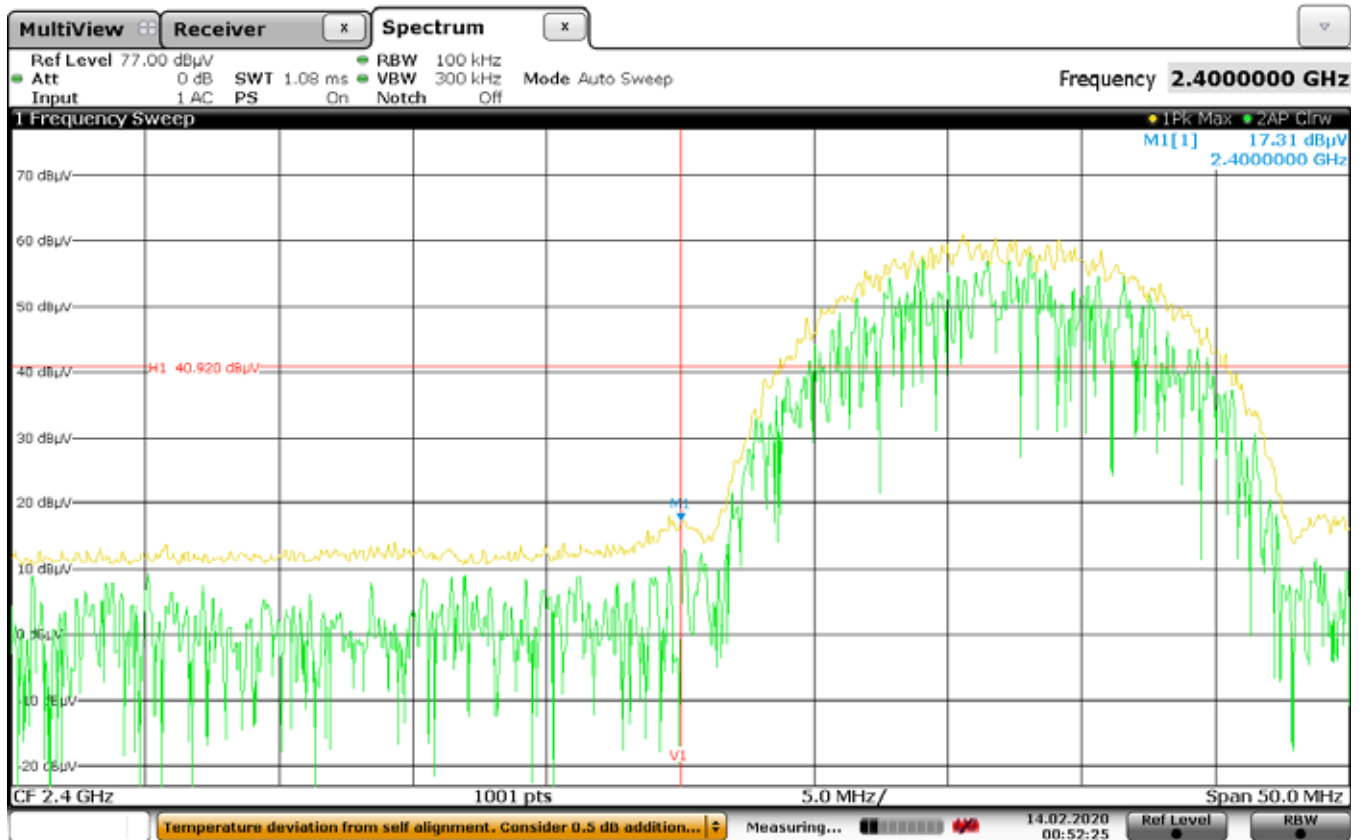

Date: 14.FEB.2020 00:52:25

DATA PAGE	
MANUFACTURER	Chamberlain Group, Inc.
EUT	MyQ Garage Door Opener
MODEL NO.	B6765T
TEST	FCC §15.247, RSS-247 – Band Edge
MODE	Wi-Fi – 802.11g - 2412MHz
DATE TESTED	February 10 – 14, 2020
TEST PERFORMED BY	Tylar Jozefczyk
NOTES	

BAND EDGE – LOW

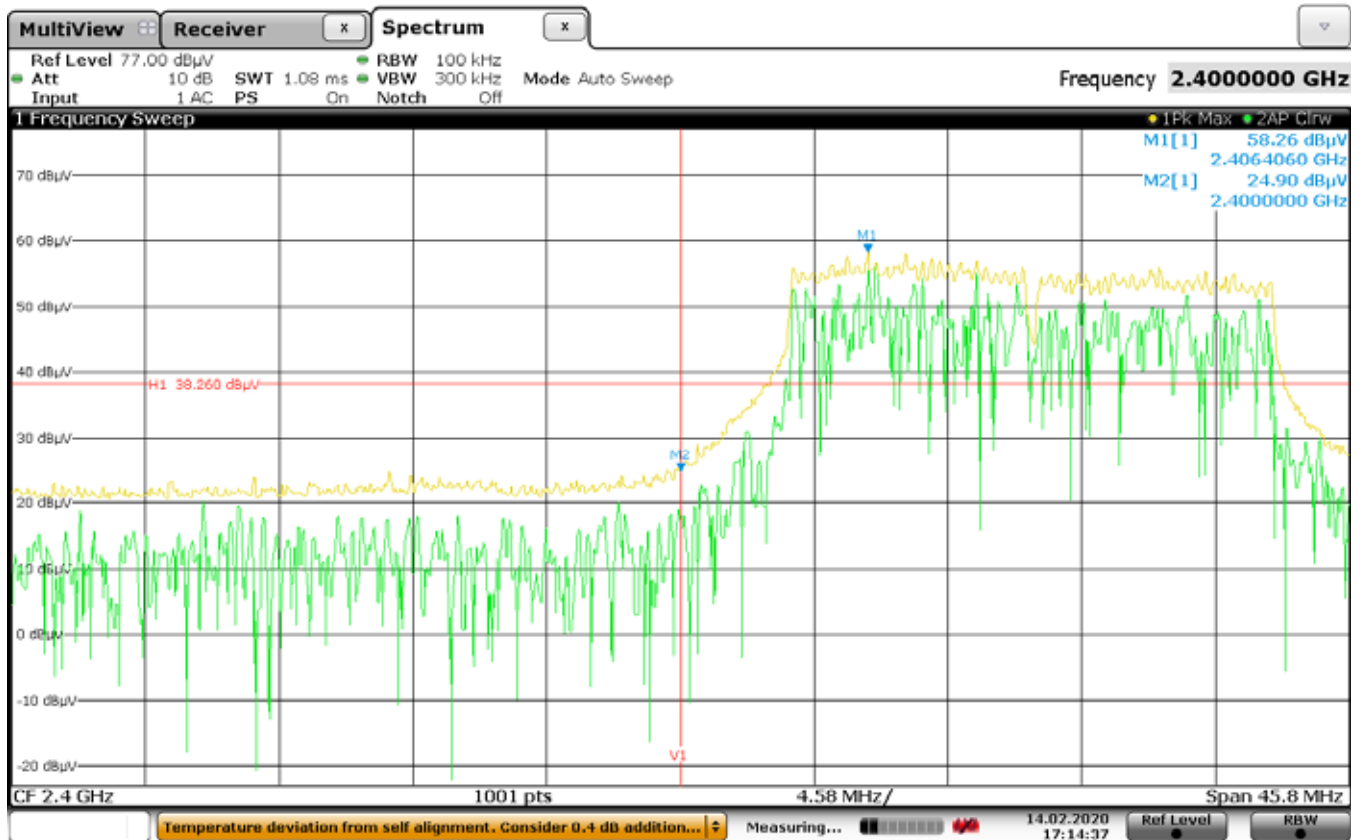

Date: 14.FEB.2020 17:14:37