

Requirements	
The field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:	
Frequency of Emission (MHz)	Field Strength (μ V/m)
30-88	100
88-216	150
216-960	200
Above 960	500

Procedures	
Since a quasi-peak detector and an average detector require long integration times, it is not practical to automatically sweep through the quasi-peak and average levels. Therefore, radiated emissions from the EUT were first scanned using a peak detector and automatically plotted. The frequencies where significant emission levels were noted were then remeasured using the quasi-peak detector or average detector.	
The EUT and all peripheral equipment were placed on an 80cm high non-conductive stand. The broadband measuring antenna was positioned at a 3 meter distance from the EUT. The frequency range from 30MHz to 1GHz was investigated using a peak detector function with the bilog antenna at several heights, horizontal and vertical polarization, and with several different orientations of the EUT with respect to the antenna. The frequency range from 1GHz to 30GHz was investigated using a peak detector function with the double ridged waveguide antenna at several heights, horizontal and vertical polarization, and with several different orientations of the EUT with respect to the antenna. The maximum levels for each antenna polarization were plotted.	
Final radiated emissions were performed on all significant broadband and narrowband emissions found in the exploratory sweeps using the following methods:	

1) Measurements from 30MHz to 1GHz were made using a quasi-peak detector and a broadband bilog antenna. Measurements above 1GHz were made using an average detector and a broadband double ridged waveguide antenna.

2) To ensure that maximum or worst case, emission levels were measured, the following steps were taken:


- The EUT was rotated so that all sides were exposed to the receiving antenna.
- Since the measuring antenna is linearly polarized, both horizontal and vertical field components were measured.
- The measuring antenna was raised and lowered from 1 to 4 meters for each antenna polarization to maximize the readings.




Test Setup for Radiated Emissions: 30MHz to 1GHz, Horizontal Polarization




Test Setup for Radiated Emissions: 30MHz to 1GHz, Vertical Polarization

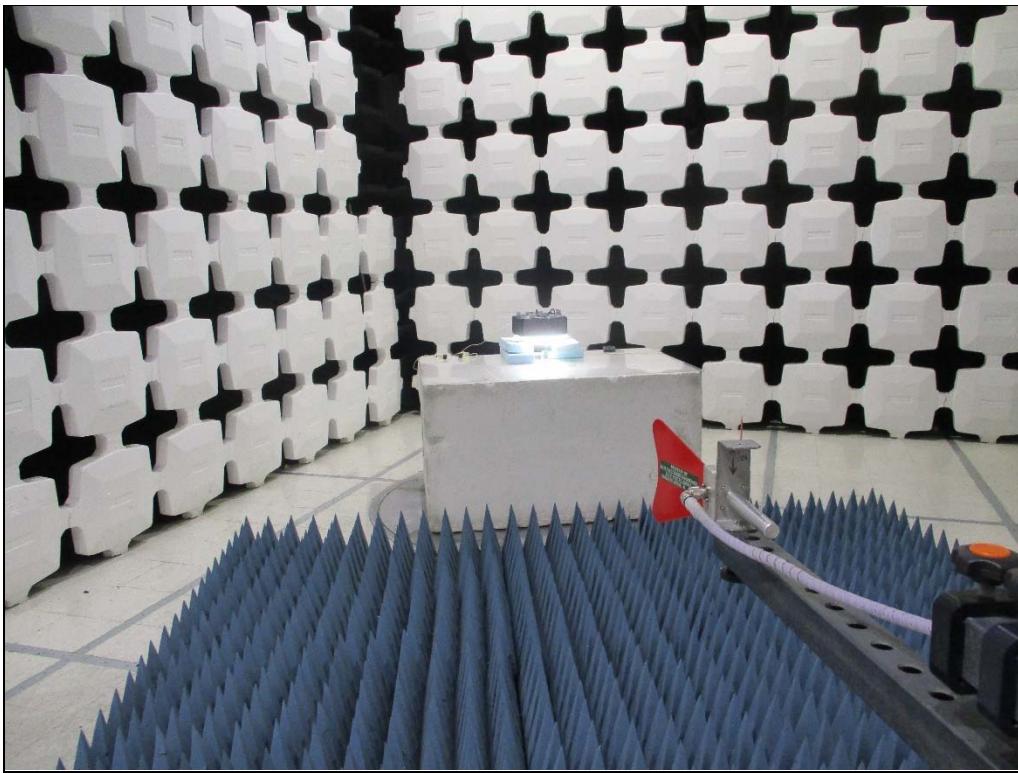


Test Setup for Radiated Emissions: 1GHz to 18GHz, Horizontal Polarization

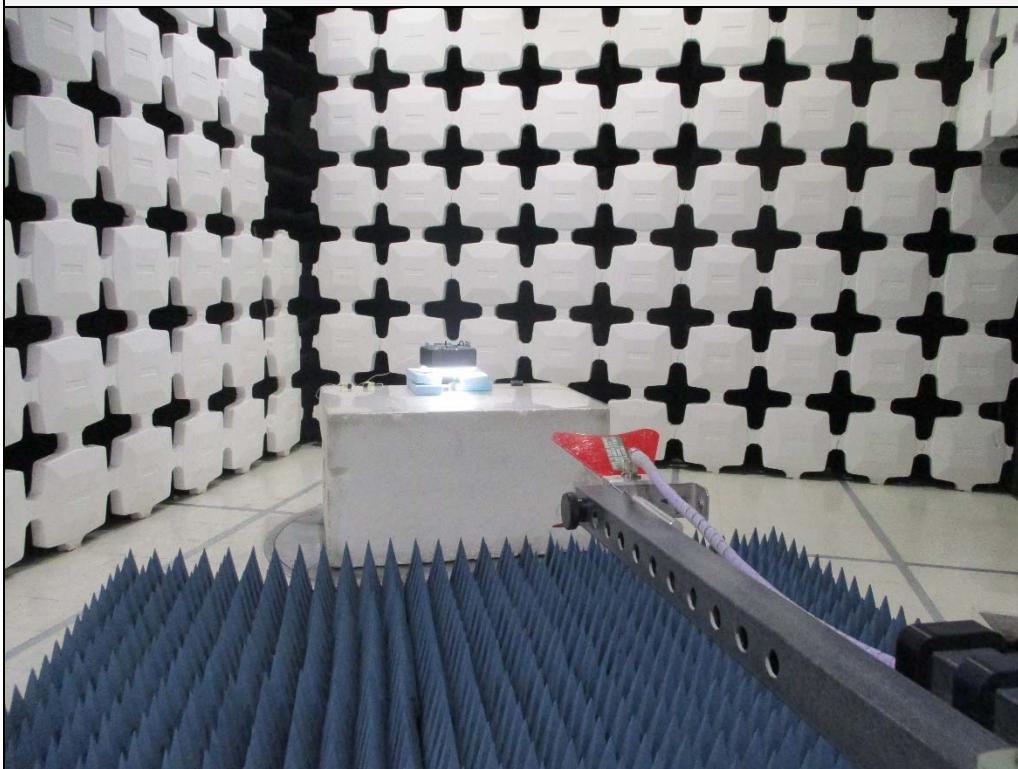

Test Setup for Radiated Emissions: 1GHz to 18GHz, Vertical Polarization

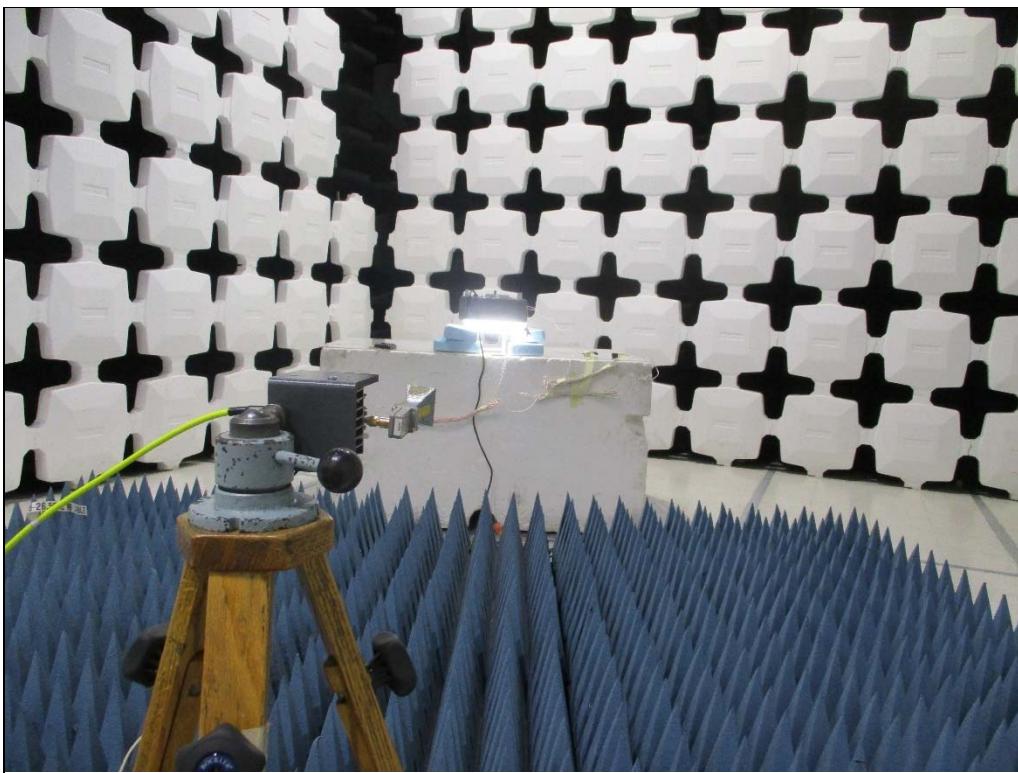

Test Setup for Radiated Emissions: 18GHz to 26.5GHz, Horizontal Polarization

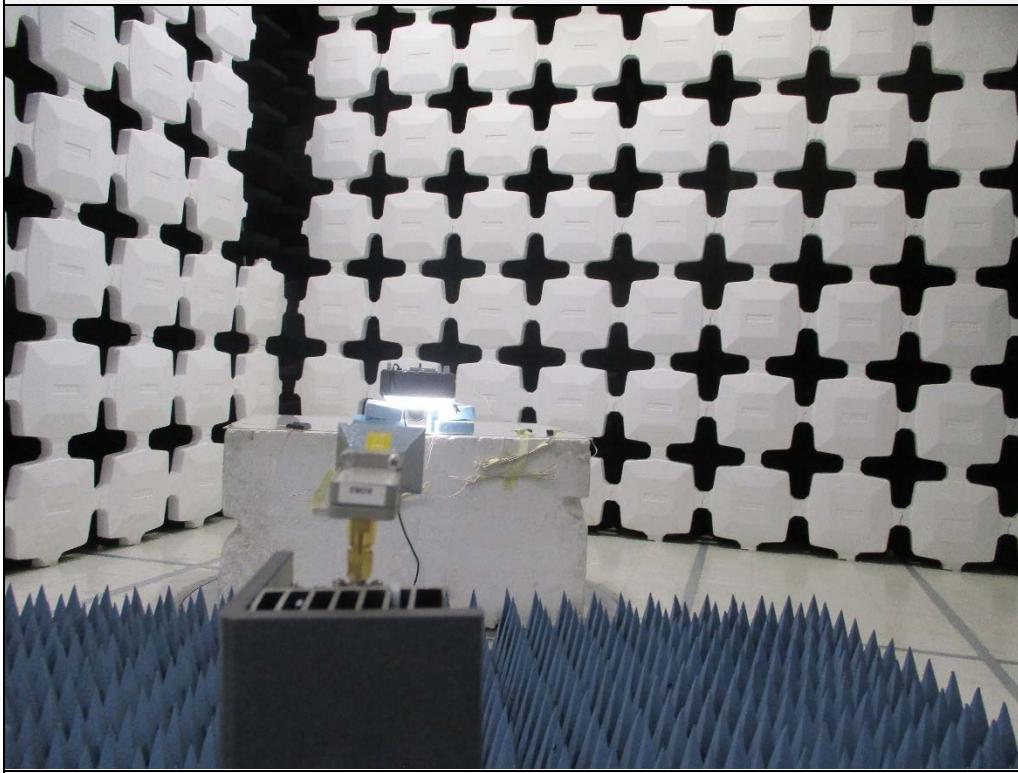

Test Setup for Radiated Emissions: 18GHz to 26.5GHz, Vertical Polarization