



4.5.4 Test Data

Mode	Number of Hopping Frequencies	Limit	Result
1	79	>15	Pass
2	79	>15	Pass
3	79	>15	Pass


Mode 1

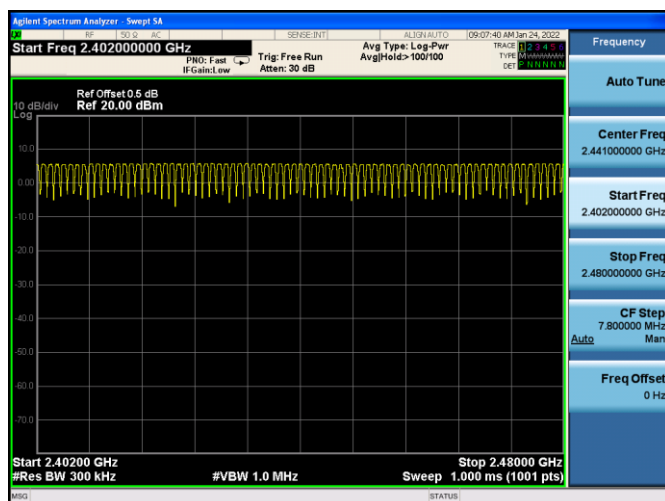

Mode2

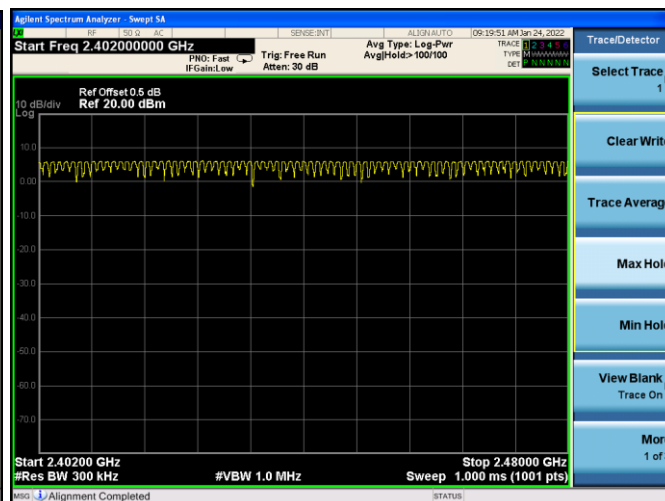


Mode 3

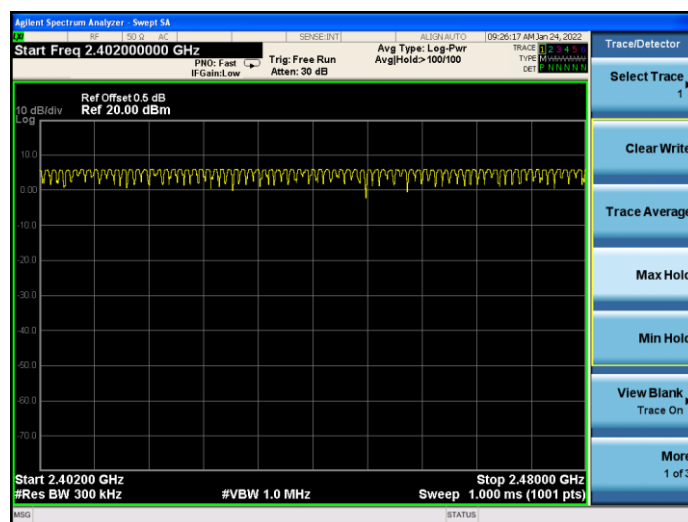

4.6 Time of Occupancy(Dwell Time)**VERDICT: PASS****4.6.1 Limit**

Standard		FCC Part 15 Subpart C Paragraph 15.247(a)
☒	Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.	
☐	For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period	
☐	For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period.	
☐	Frequency hopping systems operating in the 5725-5850 MHz band shall use at least 75 hopping frequencies. The maximum 20 dB bandwidth of the hopping channel is 1 MHz. The average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 30 second period.	

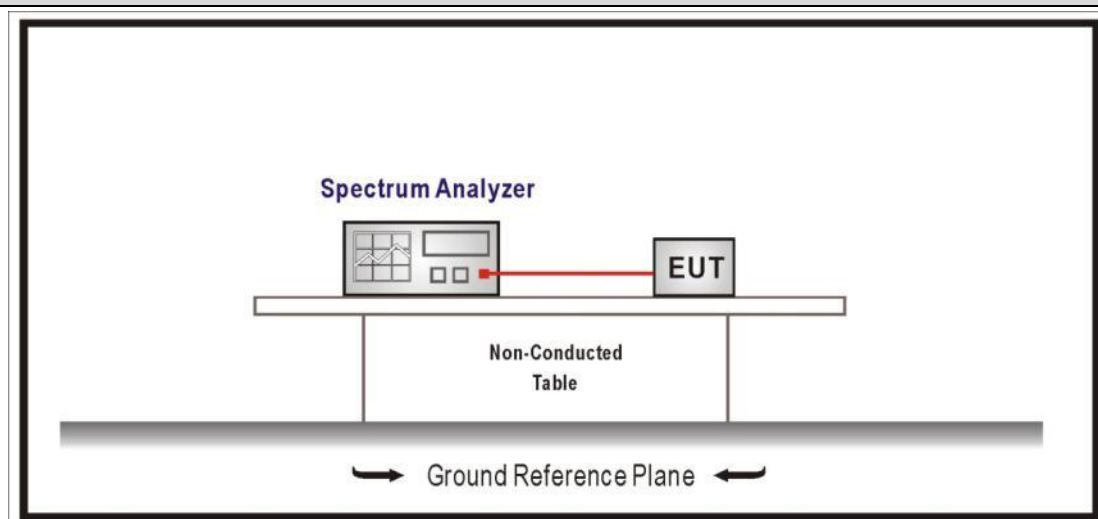4.6.2 Test Setup**4.6.3 Test Procedure**

References Rule		Chapter	Description
☒	ANSI C63.10	7.8	Evaluation of frequency-hopping device parameters
☒	ANSI C63.10	7.8.4	Time of occupancy (dwell time)

4.6.4 Test Data



Mode	Channel	Frequency (MHz)	Time of Occupancy (ms)	Limit (ms)	Result
1	39	2441	140.89	< 400	Pass

Note1: Test Time Period: $0.4 \times 79 = 31.6 \text{ sec}$

Note2: Time of Occupancy = $0.3808 \times 37 \times 31.6 / 3.16 = 140.89 \text{ ms}$

Note3: We have evaluated different packet type, shown in the report is the worst data.

Channel 39 (2441MHz) - (DH1)

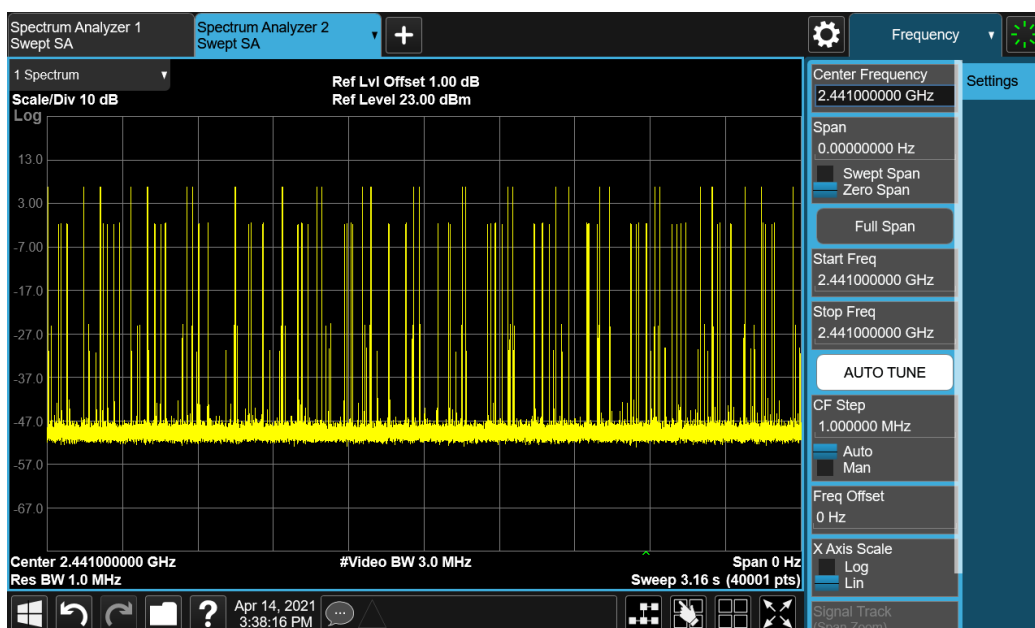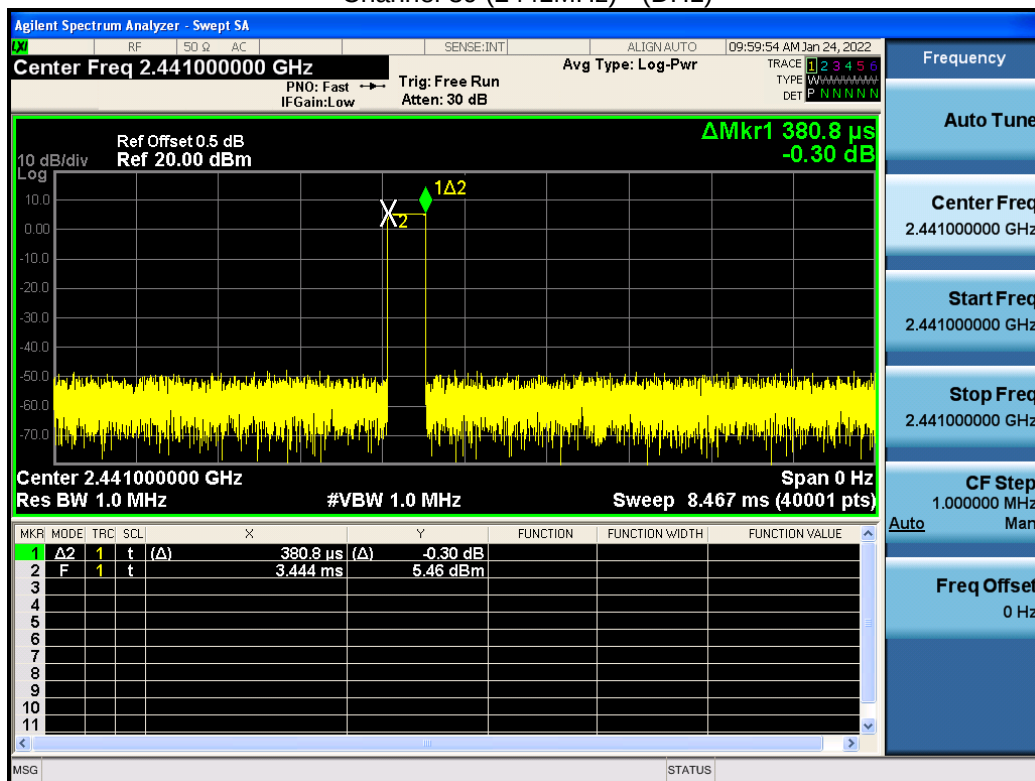



Mode	Channel	Frequency (MHz)	Time of Occupancy (ms)	Limit (ms)	Result
1	39	2441	191.51	< 400	Pass

Note1: Test Time Period: $0.4 \times 79 = 31.6 \text{ sec}$

Note2: Time of Occupancy = $1.638 \times 37 \times 31.6 / 3.16 = 191.51 \text{ ms}$

Note3: We have evaluated different packet type, shown in the report is the worst data.

Channel 39 (2441MHz) - (DH3)

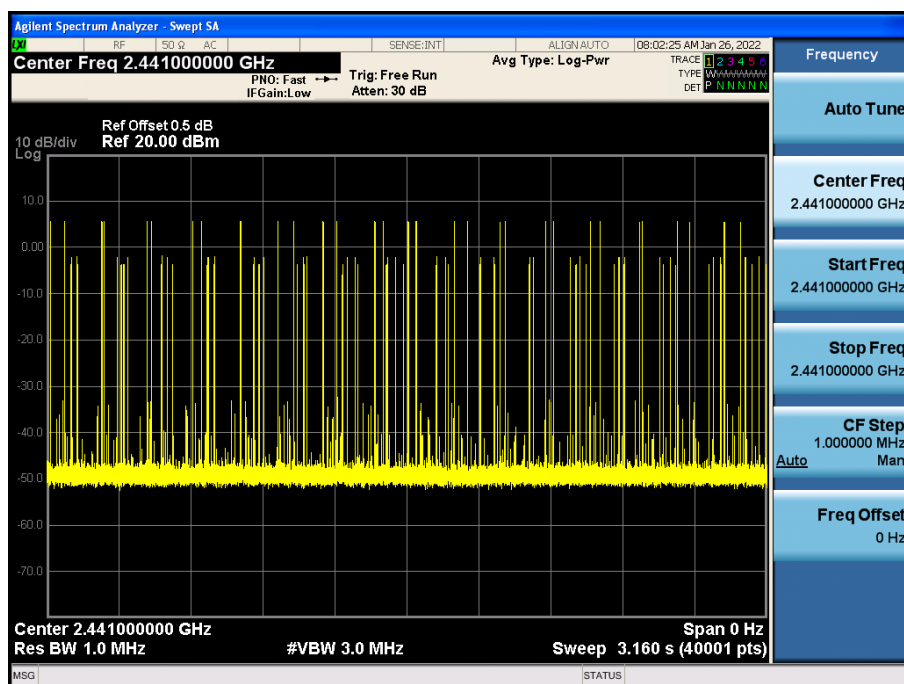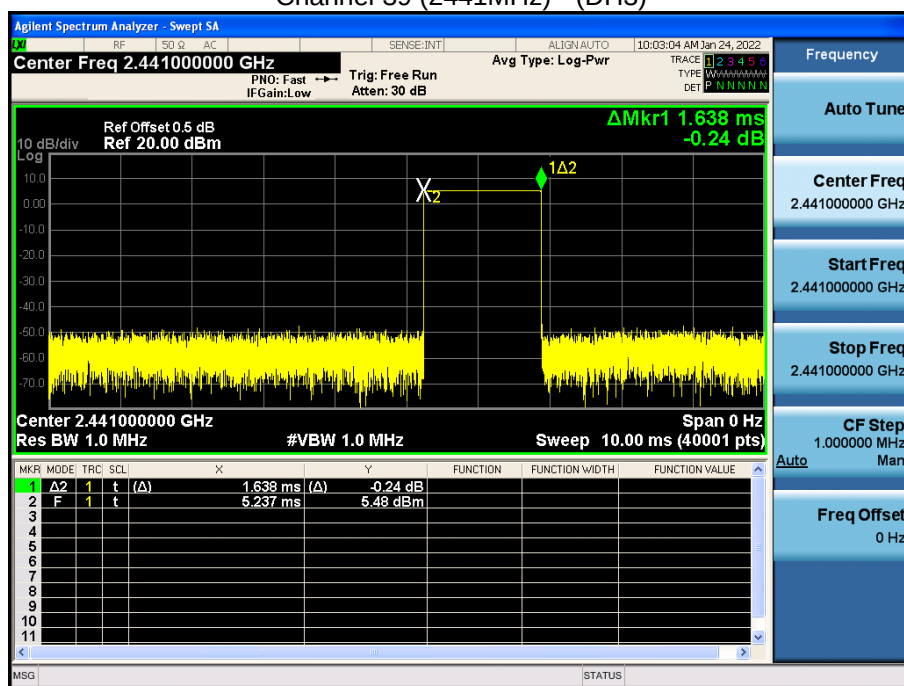



Mode	Channel	Frequency (MHz)	Time of Occupancy (ms)	Limit (ms)	Result
1	39	2441	201.6	< 400	Pass

Note1: Test Time Period: $0.4 \times 79 = 31.6 \text{ sec}$

Note2: Time of Occupancy = $2.880 \times 7 \times 31.6 / 3.16 = 201.6 \text{ ms}$

Note3: We have evaluated different packet type, shown in the report is the worst data.


Channel 39 (2441MHz) - (DH5)

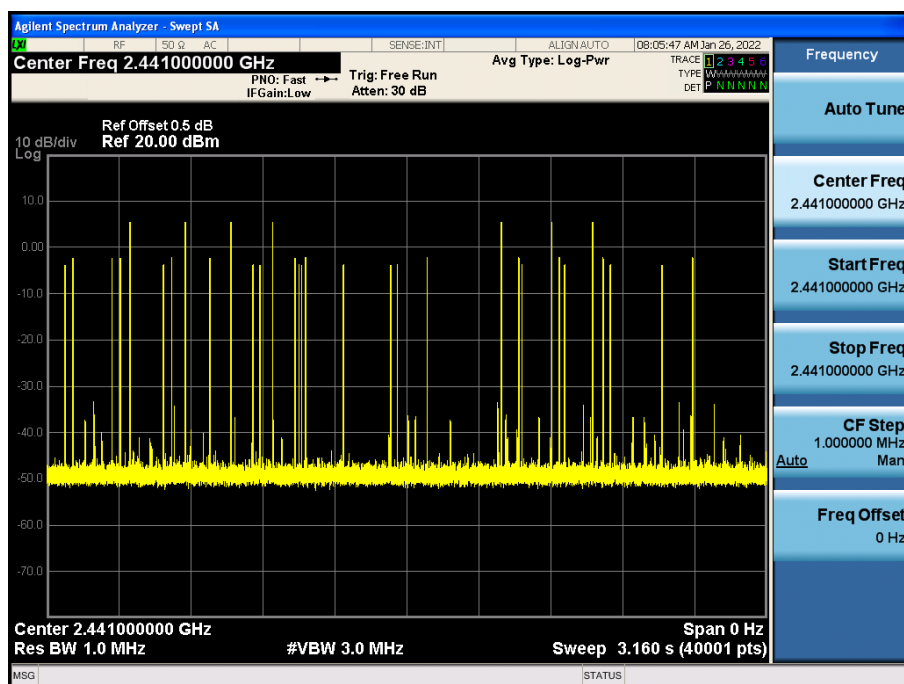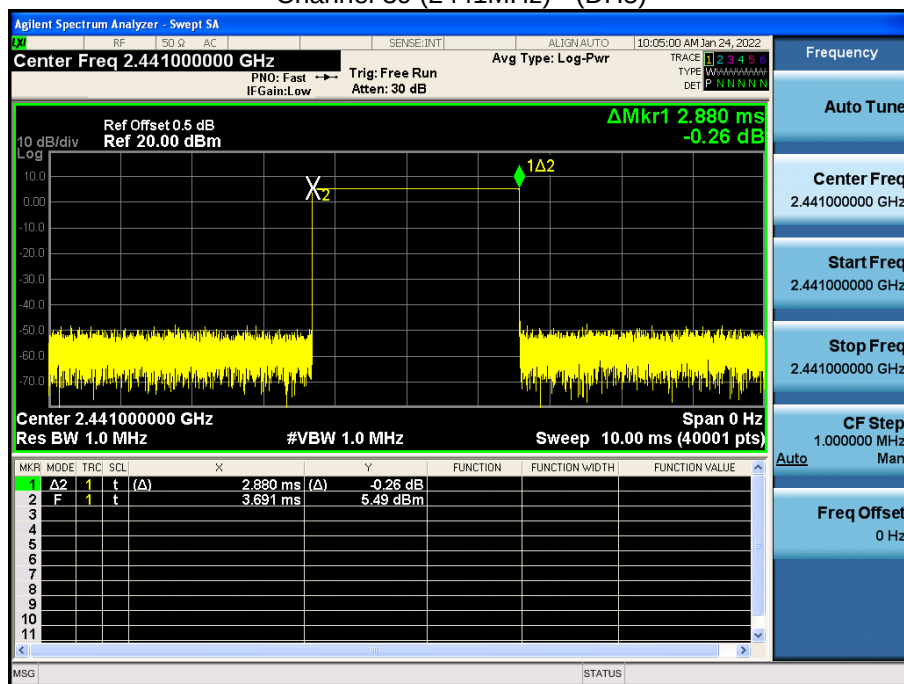

Note: The packet time of AFH mode is same as normal mode, due to the packet time of AFH mode multiply with lesser factor is dwell time of $0.4 \times 20 = 8 \text{ S}$, the dwell time of AFH mode comply with the limit.

4.7 Peak Output Power**VERDICT: PASS****4.7.1 Limit**

Standard	FCC Part 15 Subpart C Paragraph 15.247 (a)(1)
☒	Frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.
☒	Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.
☐	For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels

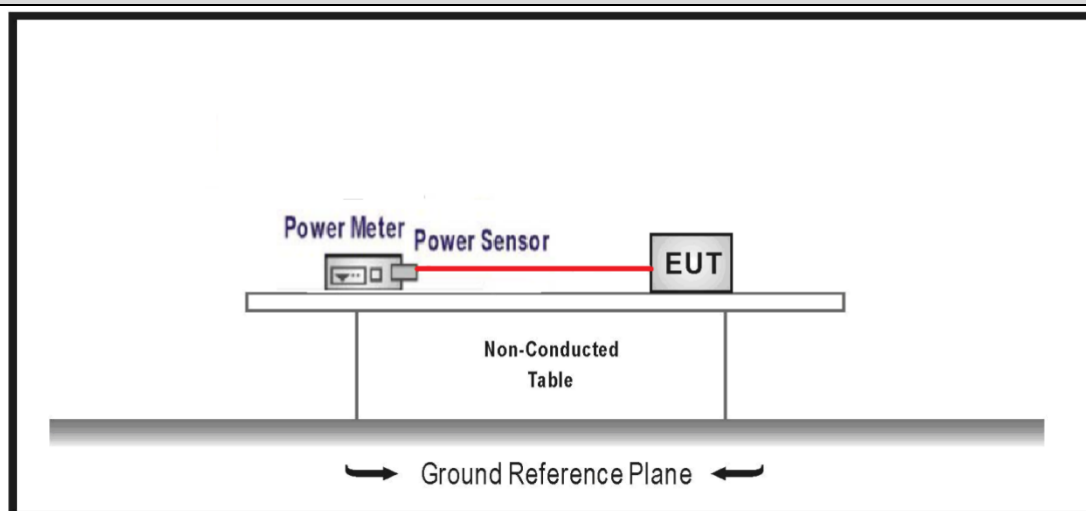4.7.2 Test Setup

4.7.3 Test Procedure

	References Rule		Chapter	Description
☒	ANSI C63.10		7.8	Evaluation of frequency-hopping device parameters
	☒	ANSI C63.10	7.8.5	Output power test procedure for frequency-hopping spread-spectrum (FHSS) devices

4.7.4 Test Data


Mode	Channel	Test Frequency (MHz)	Conducted Power (dBm)	Conducted Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)	Result
Mode 1	00	2402	5.01	≤30	5.83	≤36	Pass
	39	2441	5.11	≤30	5.93	≤36	Pass
	78	2480	5.17	≤30	5.99	≤36	Pass
Mode 2	00	2402	7.01	≤21	7.83	≤36	Pass
	39	2441	7.07	≤21	7.89	≤36	Pass
	78	2480	7.09	≤21	7.91	≤36	Pass
Mode 3	00	2402	7.21	≤21	8.03	≤36	Pass
	39	2441	7.27	≤21	8.09	≤36	Pass
	78	2480	7.31	≤21	8.13	≤36	Pass

4.8 Emissions in non-restricted frequency band**VERDICT: PASS****4.8.1 Limit**

Standard	FCC Part 15 Subpart C Paragraph 15.247(d)
RF Output power (Detection methods)	Limit(dB)
RF Output power(Average detector)	30dBc(Note1)
RF Output power(PK detector)	20dBc(Note2)

Note 1: If maximum conducted (average) output power was used to demonstrate compliance as described in 9.2, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 30 dBc).


Note 2: If the maximum peak conducted output power procedure was used, then the peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 20 dBc).

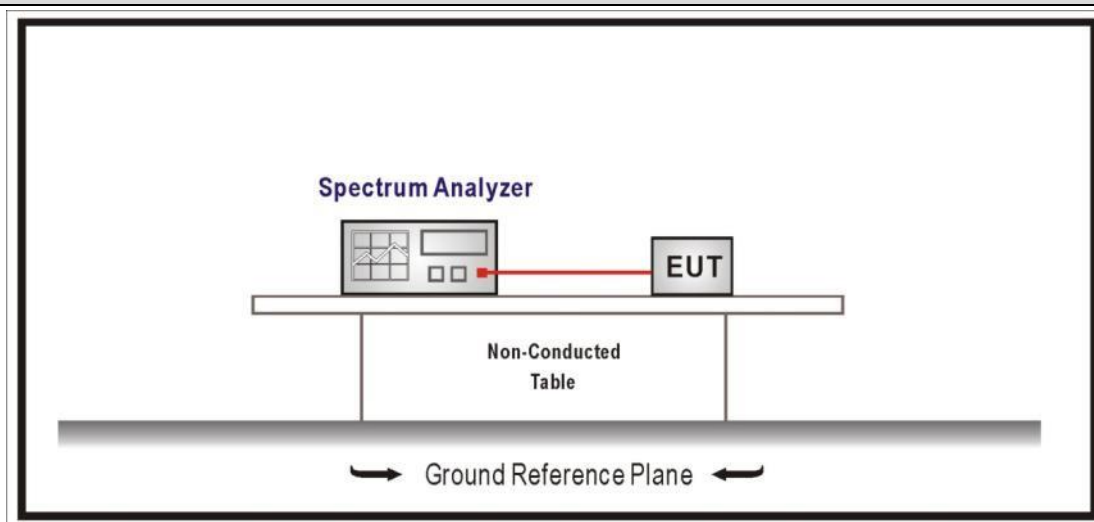4.8.2 Test Setup**4.8.3 Test Procedure**


References Rule	Chapter	Description
☒ ANSI C63.10	7.8	Evaluation of frequency-hopping device parameters
☒ ANSI C63.10	7.8.6	Band-edge measurements for RF conducted emissions

4.8.4 Test Data


Mode 1 CH00(2402MHz)

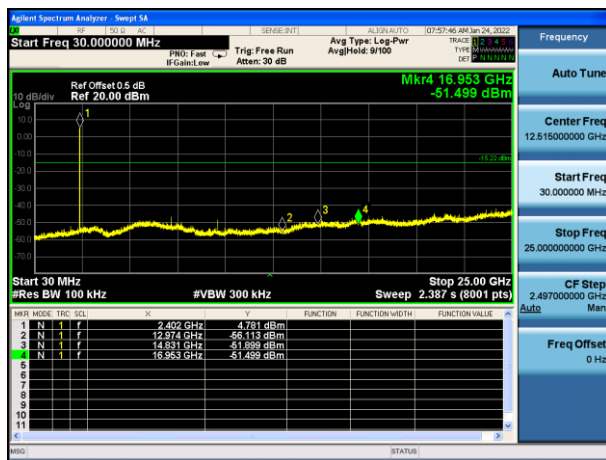


Mode 1 CH00(2402MHz)

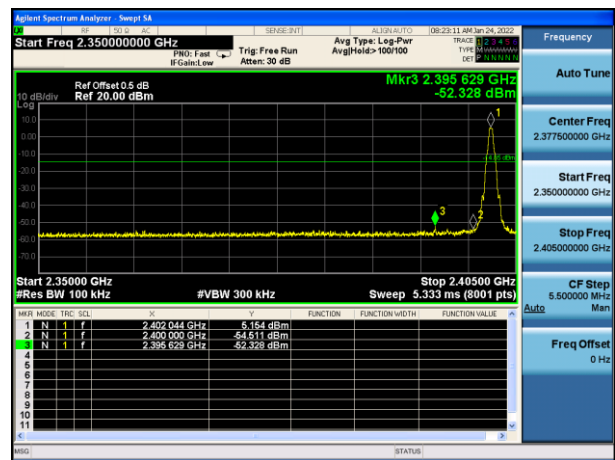


Mode 1 CH39(2441MHz)

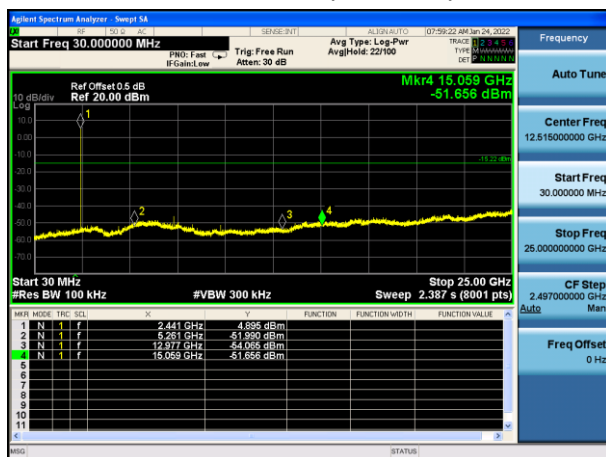


Mode 1 CH39(2441MHz)

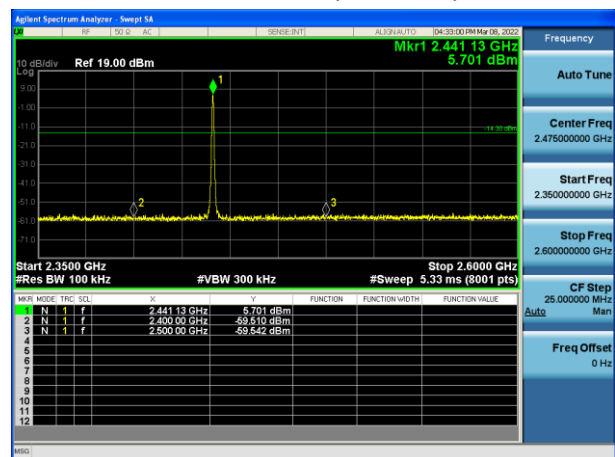


Mode 1 CH78(2480MHz)

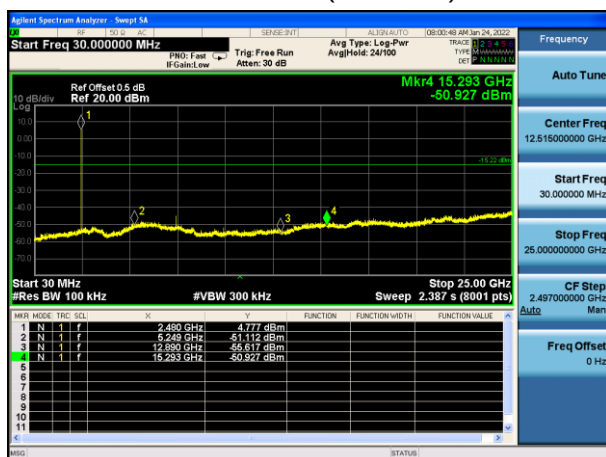


Mode 1 CH78(2480MHz)

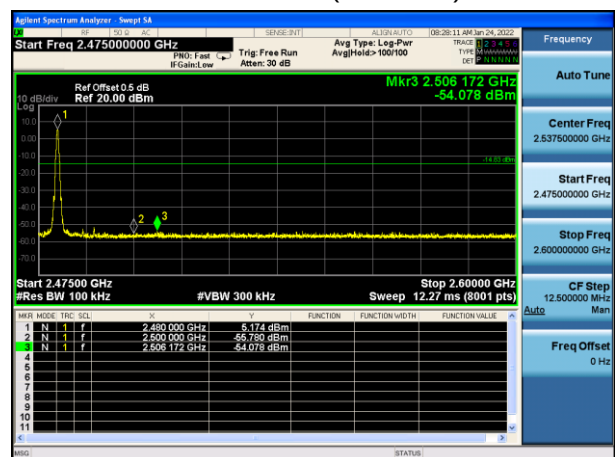


Mode 2 CH00(2402MHz)

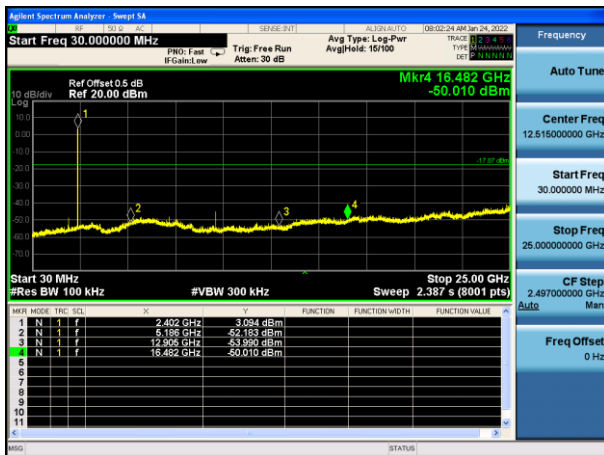


Mode 2 CH00(2402MHz)

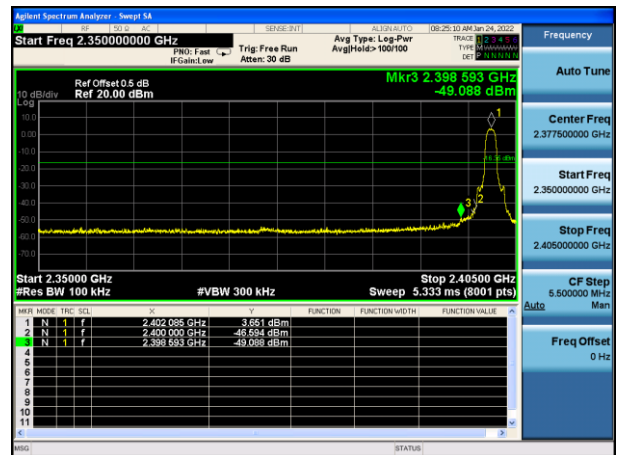


Mode 2 CH39(2441MHz)

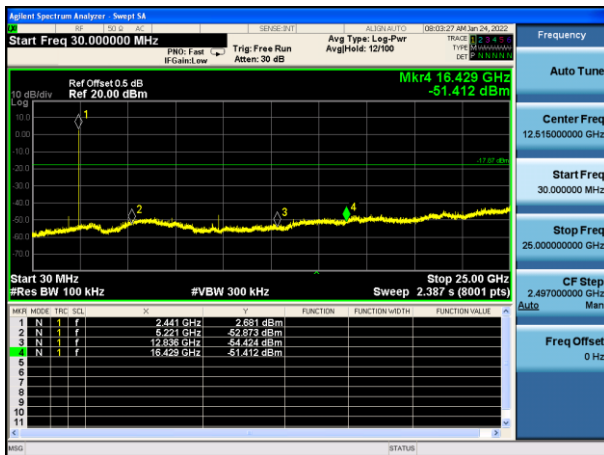


Mode 2 CH39(2441MHz)

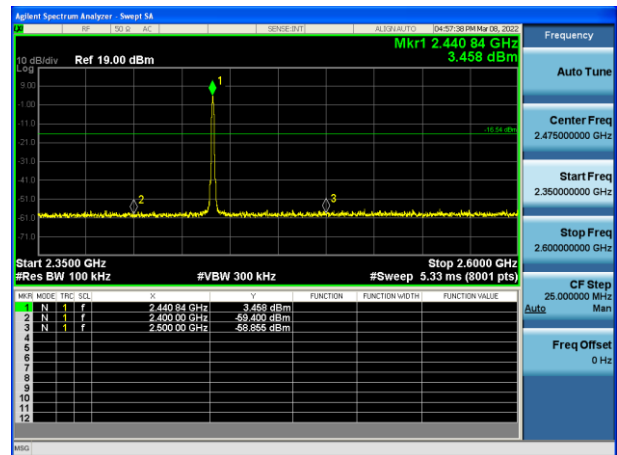


Mode 2 CH78(2480MHz)

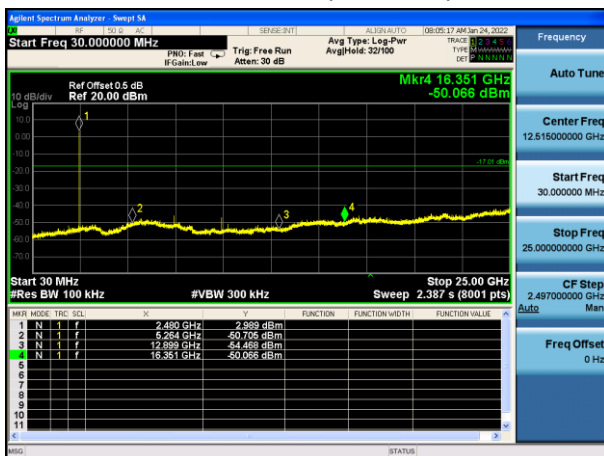


Mode 2 CH78(2480MHz)

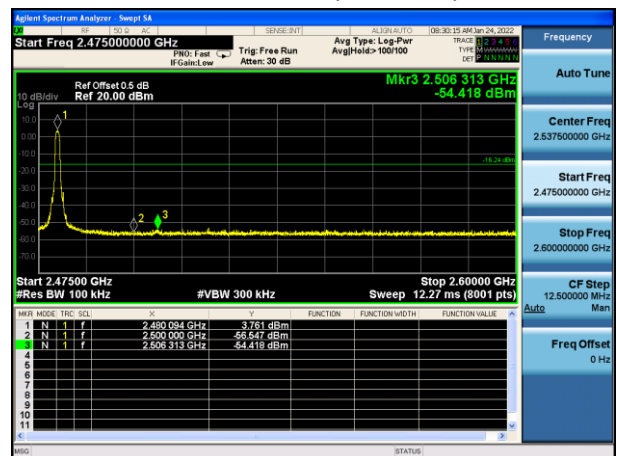


Mode 3 CH00(2402MHz)

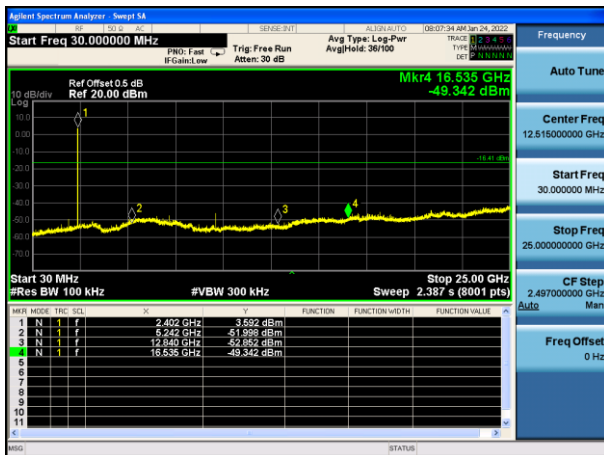


Mode 3 CH00(2402MHz)

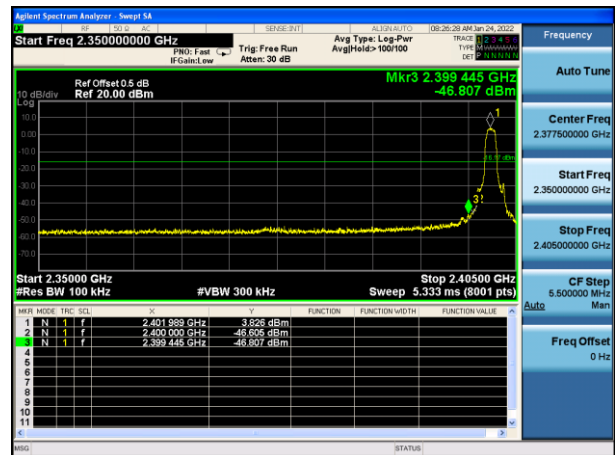


Mode 3 CH39(2441MHz)

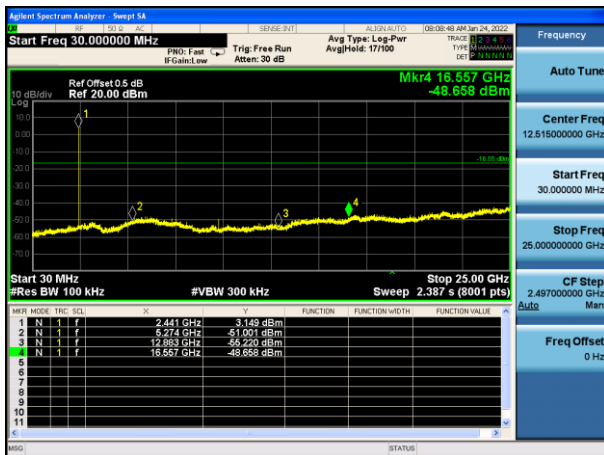


Mode 3 CH39(2441MHz)

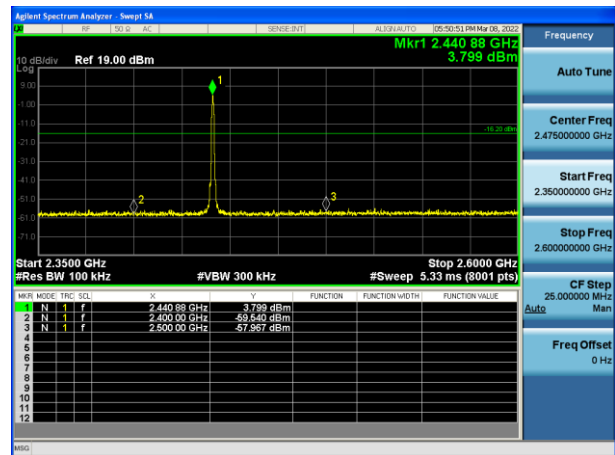


Mode 3 CH78(2480MHz)

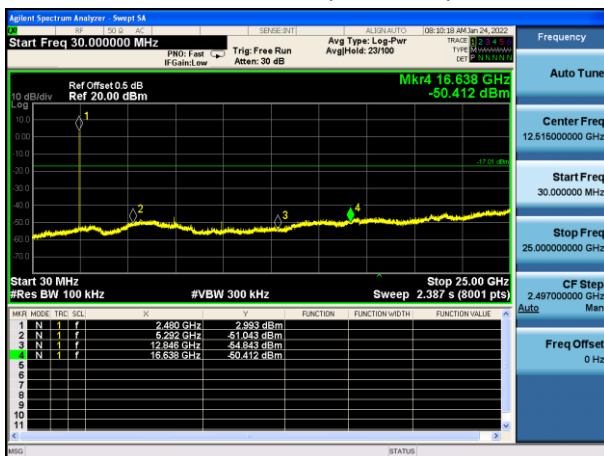


Mode 3 CH78(2480MHz)

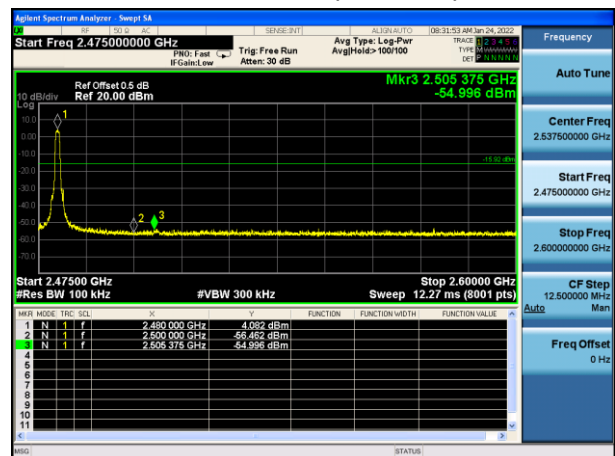


Mode 4

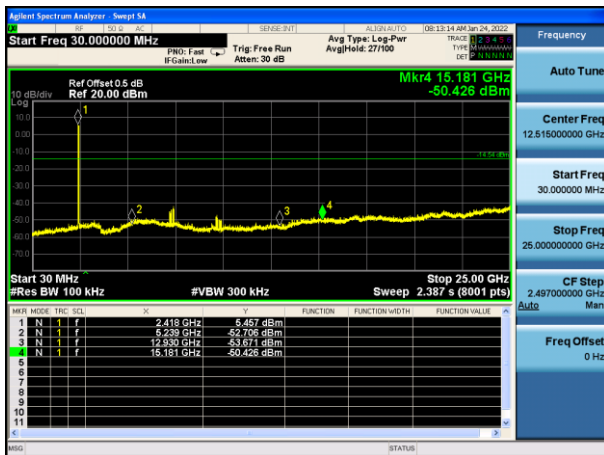


Mode 4

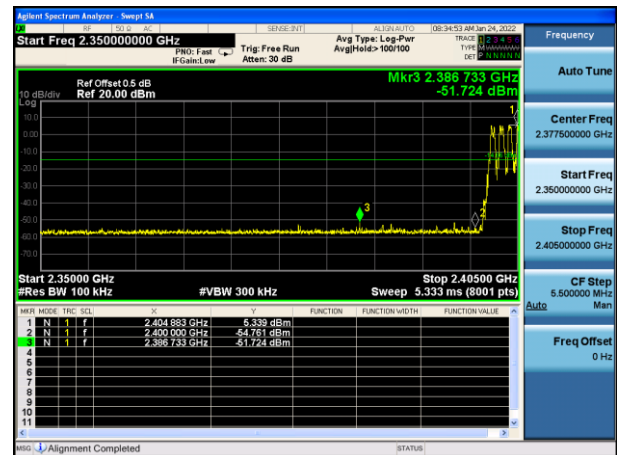


Mode 4

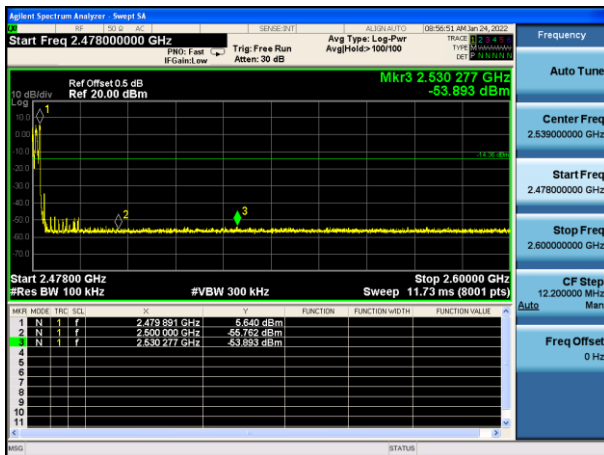


Mode 5

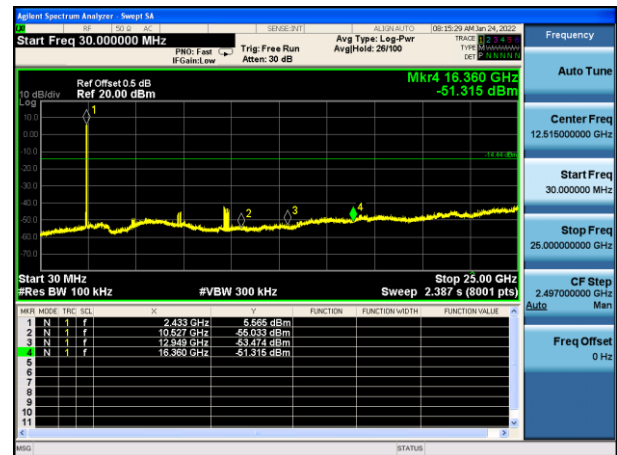


Mode 5

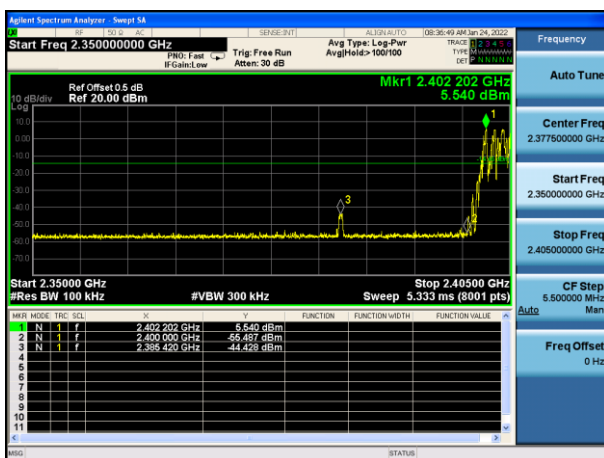


Mode 5

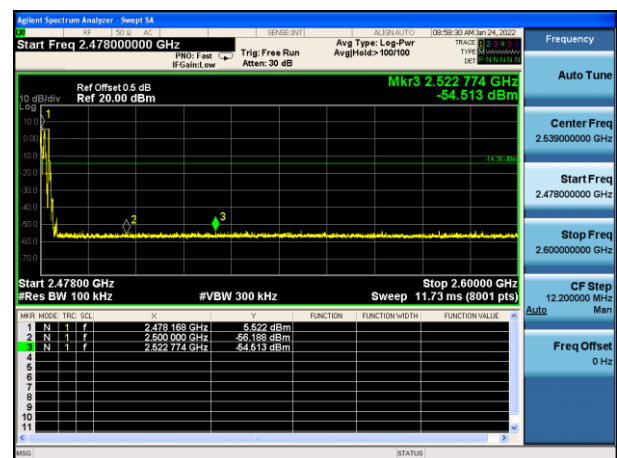


Mode 6

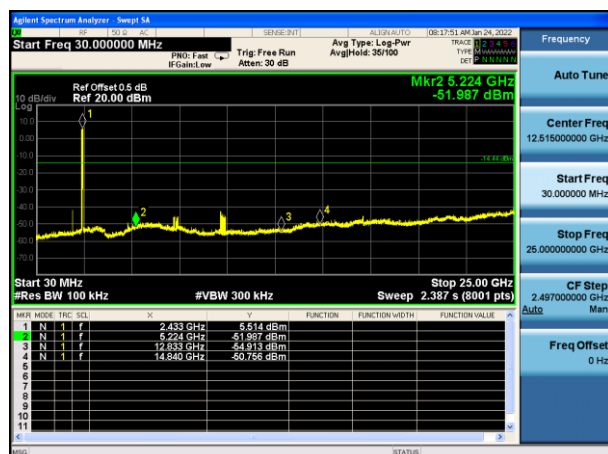

Mode 6

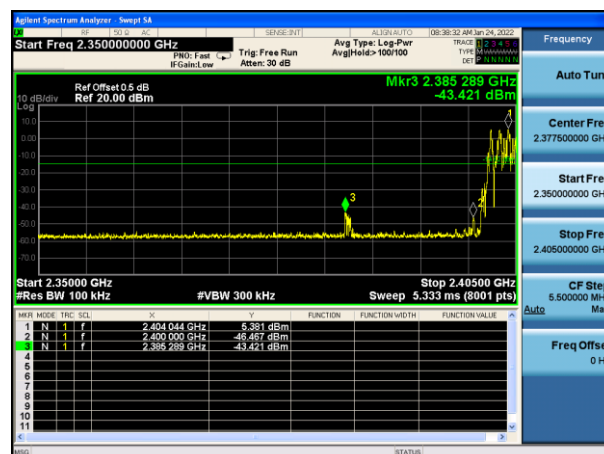


Mode 6

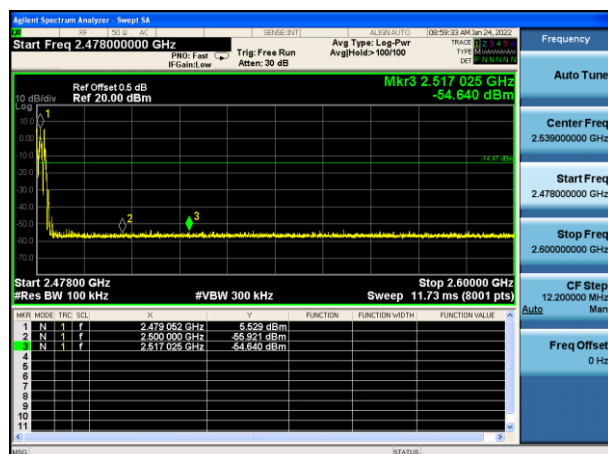

4.9 Duty cycle**VERDICT: PASS****4.9.1 Limit**

N/A

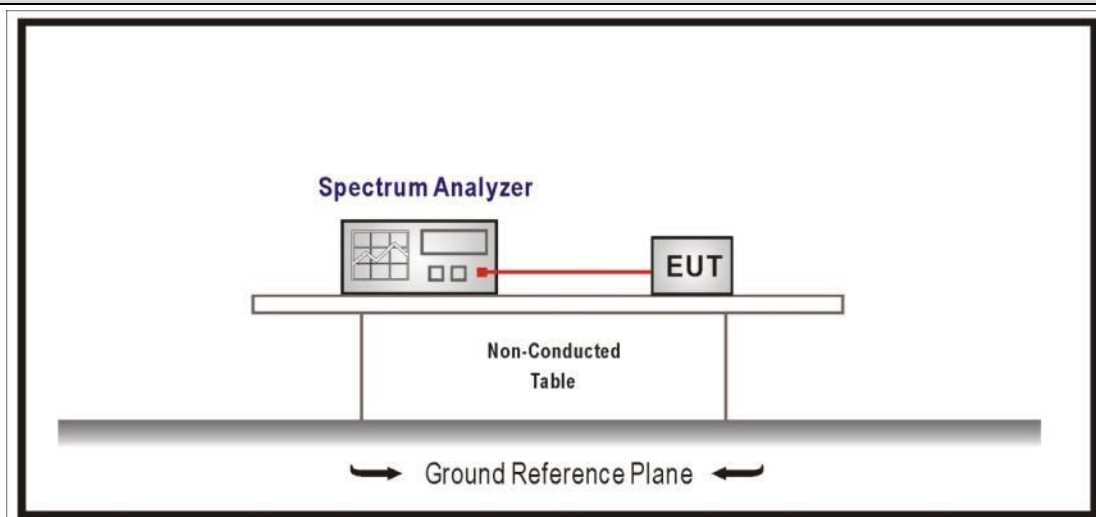4.9.2 Test Setup**4.9.3 Test Procedure**

References Rule		Chapter	Description
☒	ANSI C63.10	11.6	Duty cycle (D), transmission duration (T), and maximum power control level


4.9.4 Test Data

Test Mode	Tx On (ms)	Tx Off (ms)	VBW (kHz)	Tx On + Tx Off (ms)	Duty Cycle (%)
Mode 1	-	-	10	-	100
Mode 2	-	-	10	-	100
Mode 3	-	-	10	-	100


Note 1: T means the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

Note 2: According to KDB 558074, when test for Radiated Emission Band Edge and Radiated Emission, for average detector set: $VBW \geq 1/T$ will be used.


Mode 1 CH39 2441MHz

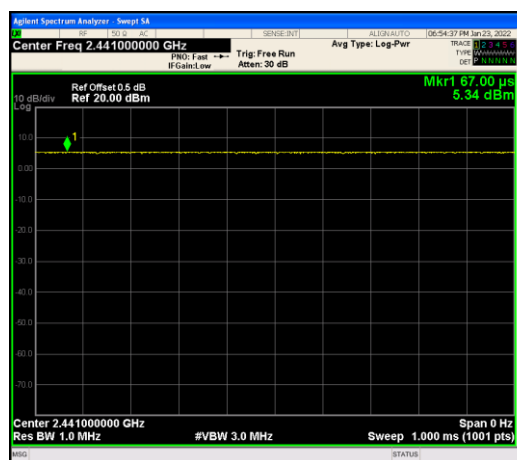

Mode 2 CH39 2441MHz

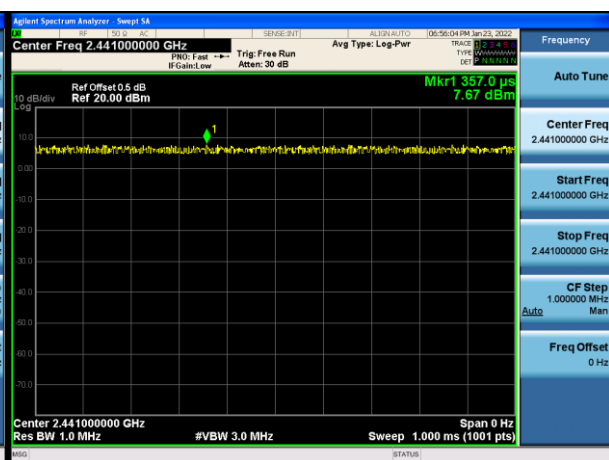


Mode 3 CH39 2441MHz

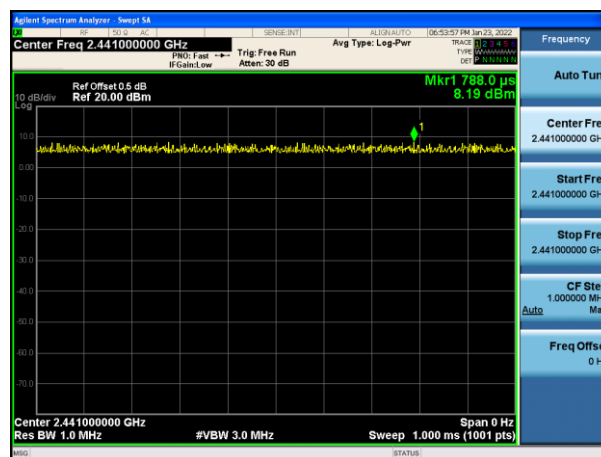

4.10 Band Edge**VERDICT: PASS****4.10.1 Limit**

Standard		FCC Part 15 Subpart C Paragraph 15.247(d) ,15.209		
Frequency bands (MHz)	Detector	Limit (dB μ V/m)	RBW (MHz)	Distance (m)
2310-2390	PK	74	1	3
2483.5-2500	AV	54	1	3

Note: The field strength of emissions appearing within these frequency bands shall not exceed the limits.

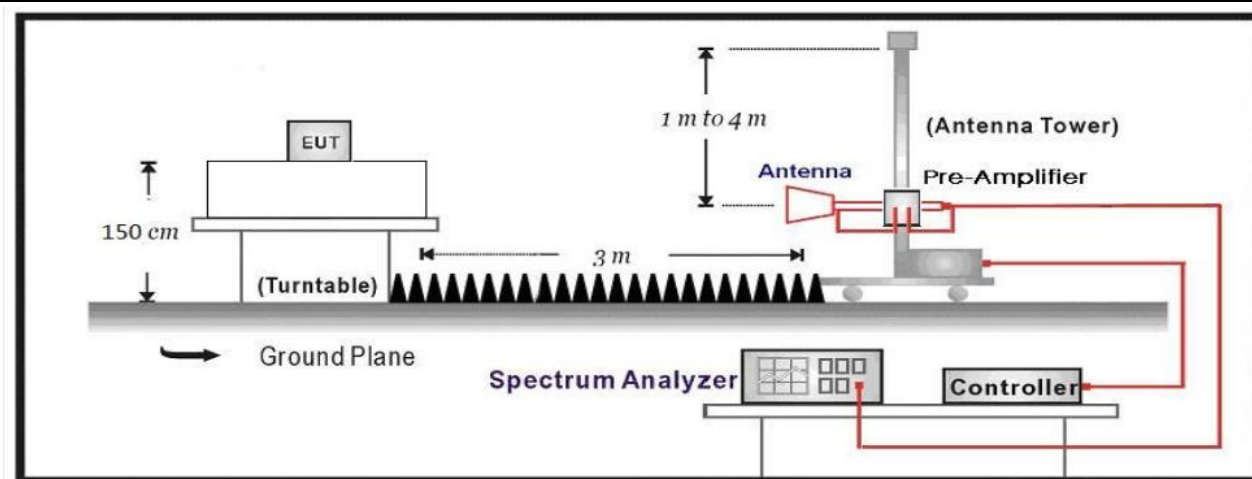
4.10.2 Test Setup**4.10.3 Test Procedure**

Test Method

	References Rule	Chapter	Description
☐	DA 00-705	N/A	duty cycle correction factor
☒	ANSI C63.10	6.10	Band-edge testing
☒	ANSI C63.10	6.10.5	Restricted-band band-edge measurements
☐	ANSI C63.10	6.10.6	Marker-delta method
☐	ANSI C63.10	6.4	Radiated emissions from unlicensed wireless devices below 30 MHz
☐	ANSI C63.10	6.5	Radiated emissions from unlicensed wireless devices in the frequency range of 30 MHz to 1000 MHz
☒	ANSI C63.10	6.6	Radiated emissions from unlicensed wireless devices above 1 GHz


4.10.4 Test Data

Profile: 21C0559R	Page No.: 1
Engineer: Carlosshen	
Site: AC5	Time: 2022/01/24 - 00:39
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: 8675I	Power: battery 3.85V
Note: Mode 1:Transmit at 2402MHz by DH5	

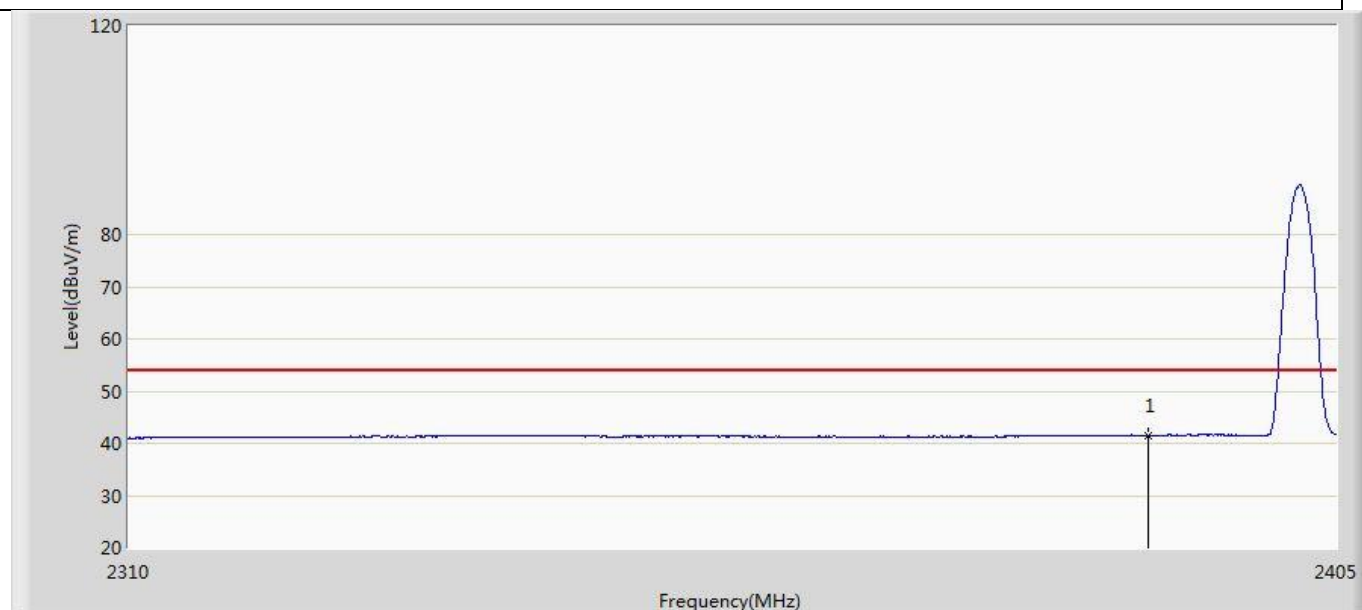


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	41.529	3.224	-12.471	54.000	38.305	AV

Profile: 21C0559R	Page No.: 2
Engineer: Carlosshen	
Site: AC5	Time: 2022/01/24 - 19:38
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: 8675I	Power: battery 3.85V
Note: Mode 1:Transmit at 2402MHz by DH5	

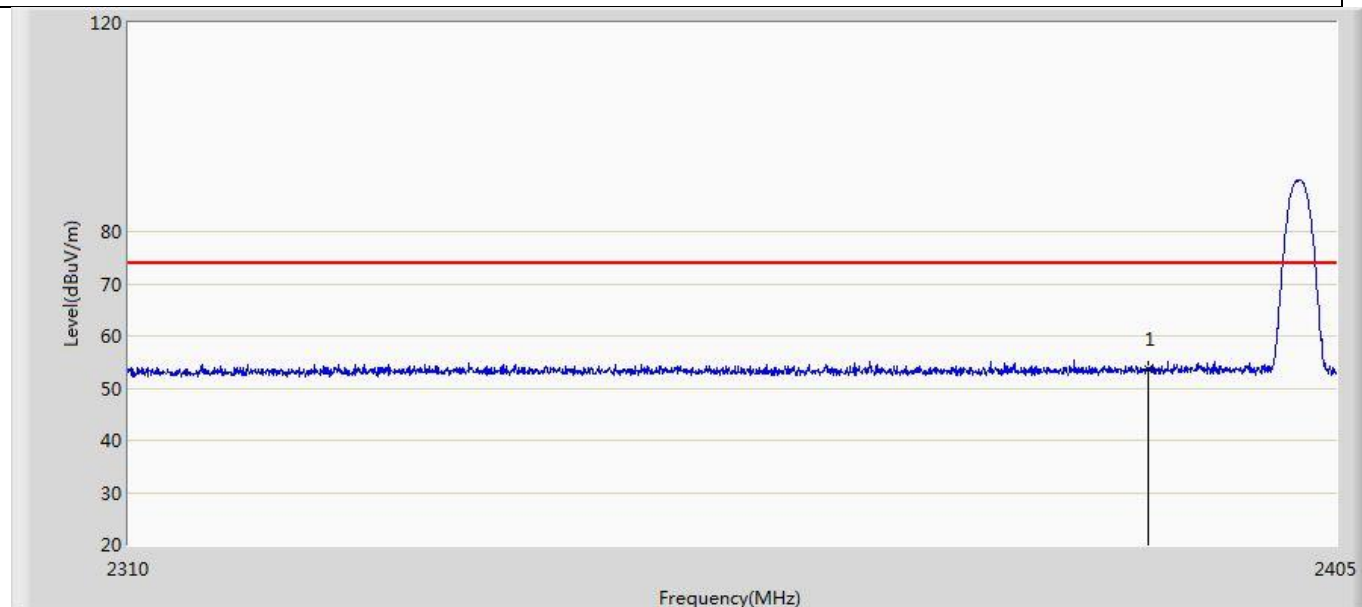


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	53.546	15.241	-20.454	74.000	38.305	PK

Profile: 21C0559R	Page No.: 3
Engineer: Carlosshen	
Site: AC5	Time: 2022/01/24 - 19:39
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: 8675I	Power: battery 3.85V
Note: Mode 1:Transmit at 2402MHz by DH5	

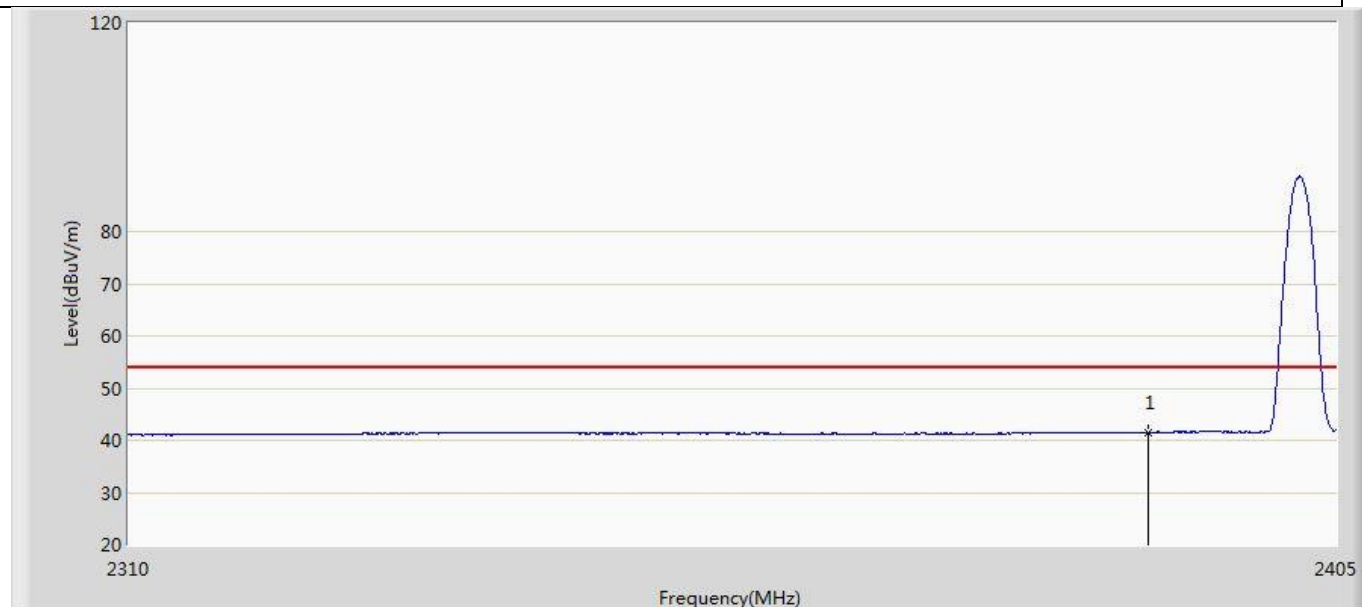


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	41.520	3.215	-12.480	54.000	38.305	AV

Profile: 21C0559R	Page No.: 4
Engineer: Carlosshen	
Site: AC5	Time: 2022/01/24 - 19:43
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: 8675I	Power: battery 3.85V
Note: Mode 1:Transmit at 2402MHz by DH5	

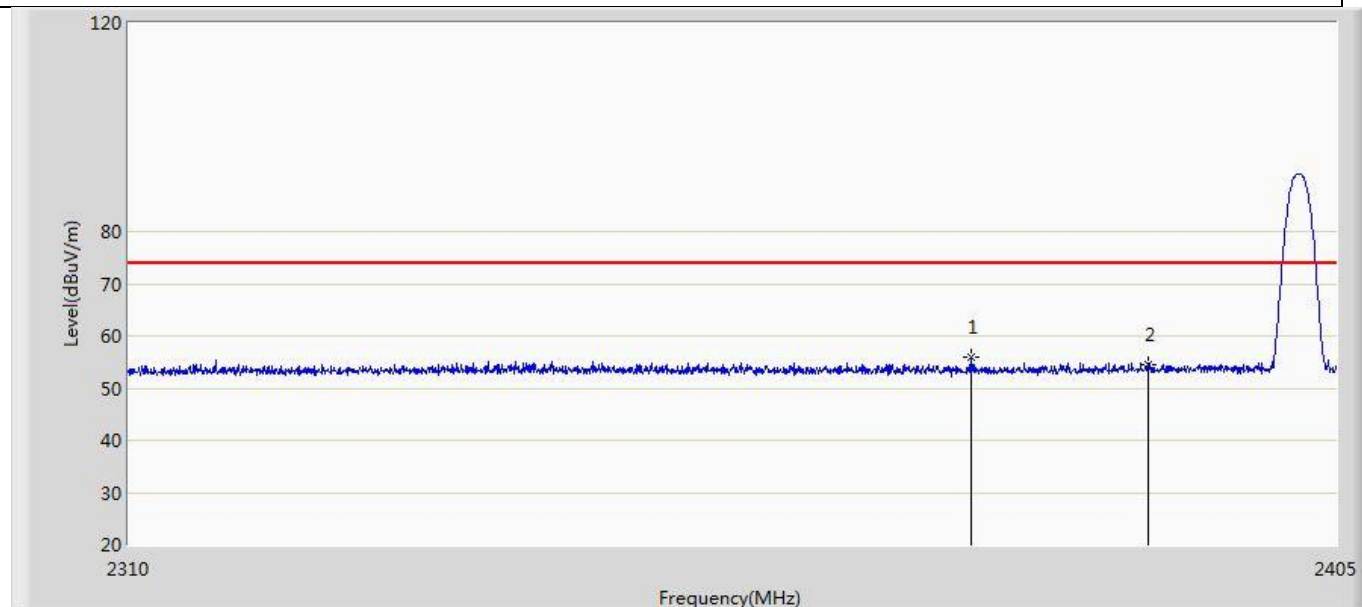


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2375.930	55.904	17.795	-18.096	74.000	38.109	PK
2		2390.000	54.535	16.230	-19.465	74.000	38.305	PK

Profile: 21C0559R	Page No.: 5
Engineer: Carlosshen	
Site: AC5	Time: 2022/01/24 - 19:45
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: 8675I	Power: battery 3.85V
Note: Mode 1:Transmit at 2480MHz by DH5	

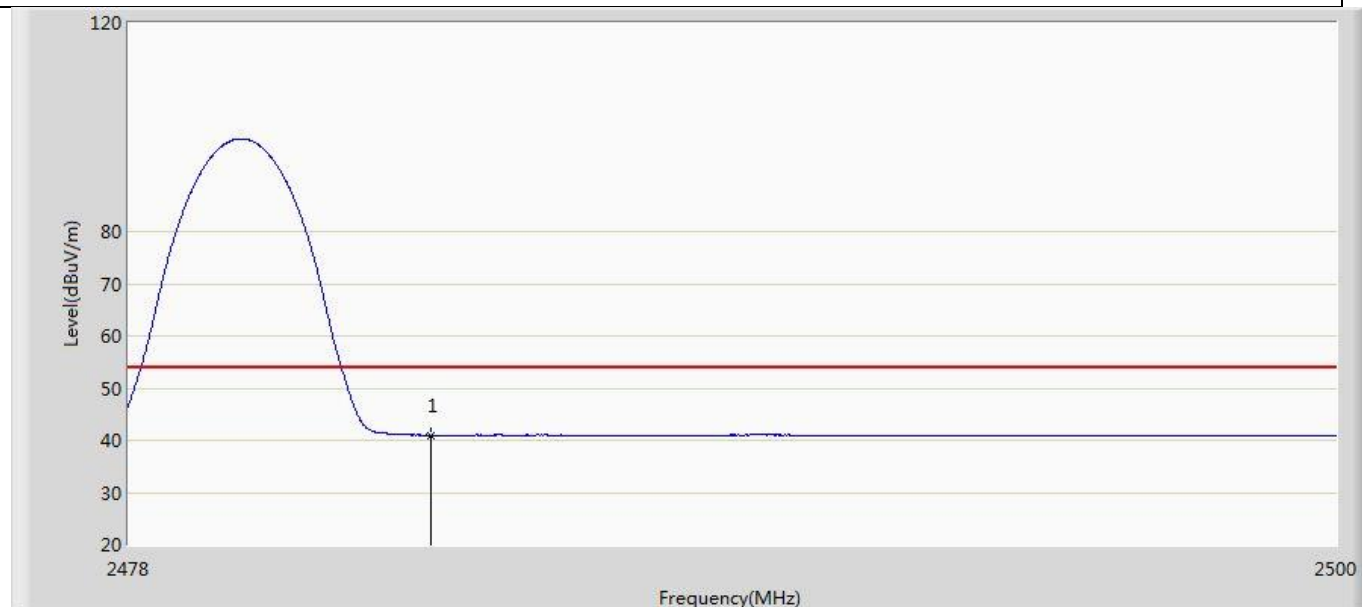


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	40.942	2.488	-13.058	54.000	38.453	AV

Profile: 21C0559R	Page No.: 6
Engineer: Carlosshen	
Site: AC5	Time: 2022/01/24 - 19:48
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: 8675I	Power: battery 3.85V
Note: Mode 1:Transmit at 2480MHz by DH5	

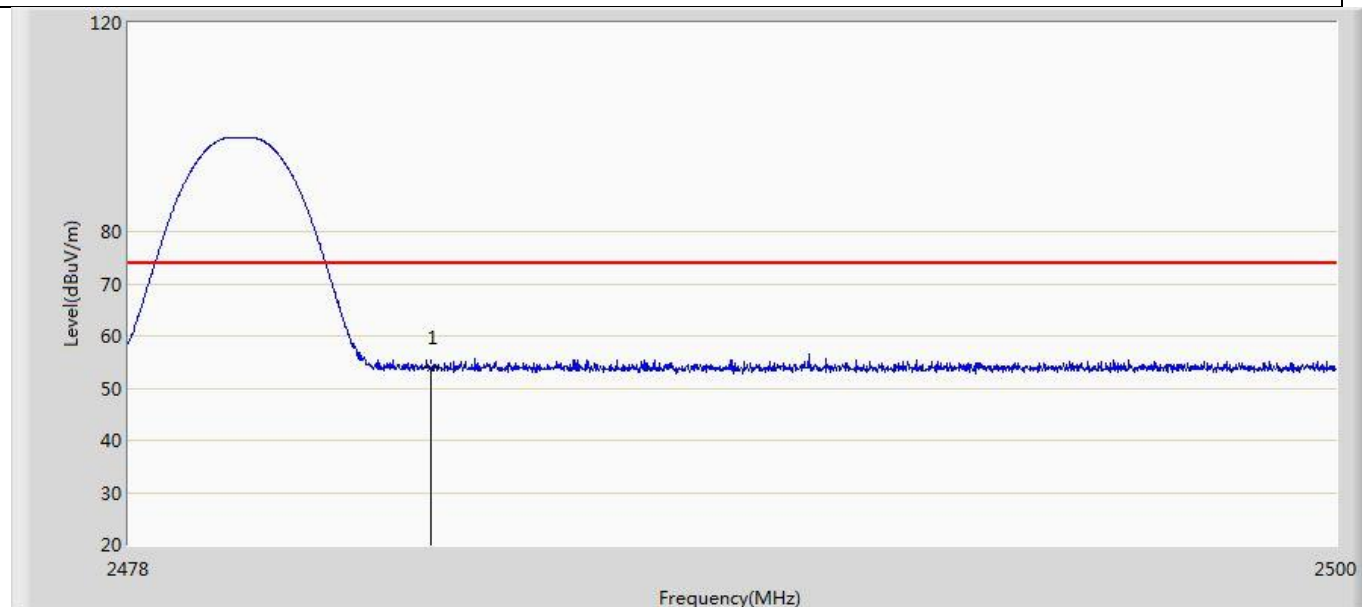


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	53.824	15.370	-20.176	74.000	38.453	PK

Profile: 21C0559R	Page No.: 7
Engineer: Carlosshen	
Site: AC5	Time: 2022/01/24 - 19:49
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: 8675I	Power: battery 3.85V
Note: Mode 1:Transmit at 2480MHz by DH5	

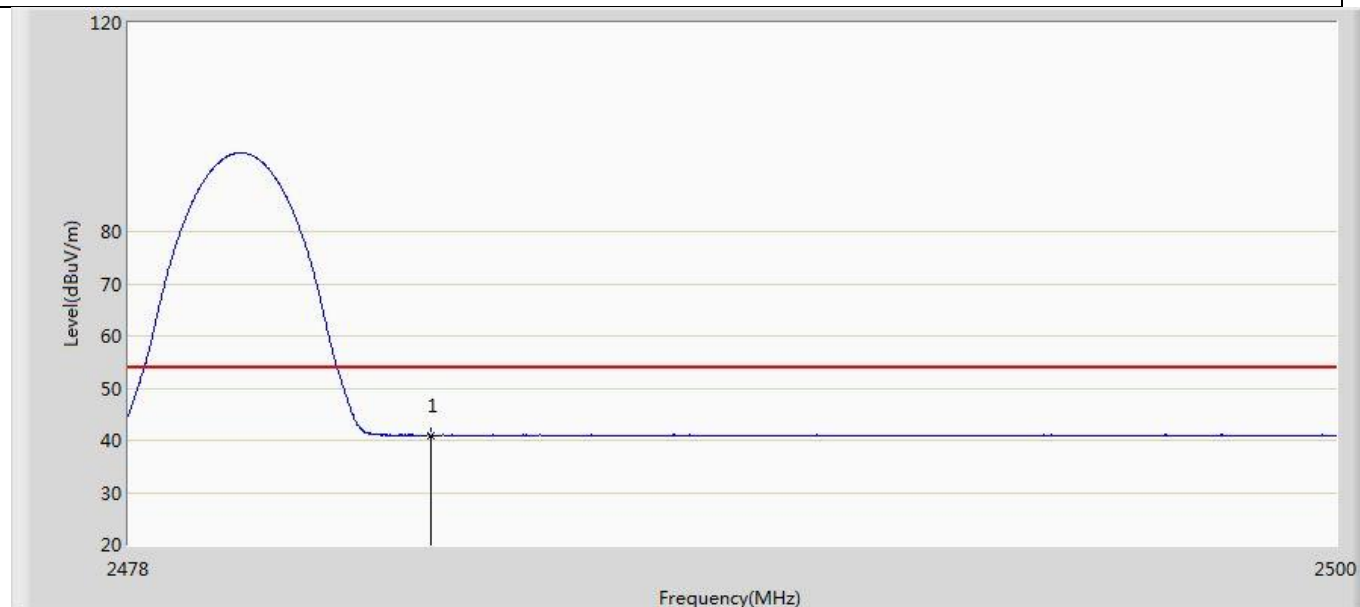


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	40.903	2.449	-13.097	54.000	38.453	AV

Profile: 21C0559R	Page No.: 8
Engineer: Carlosshen	
Site: AC5	Time: 2022/01/24 - 19:52
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: 8675I	Power: battery 3.85V
Note: Mode 1:Transmit at 2480MHz by DH5	

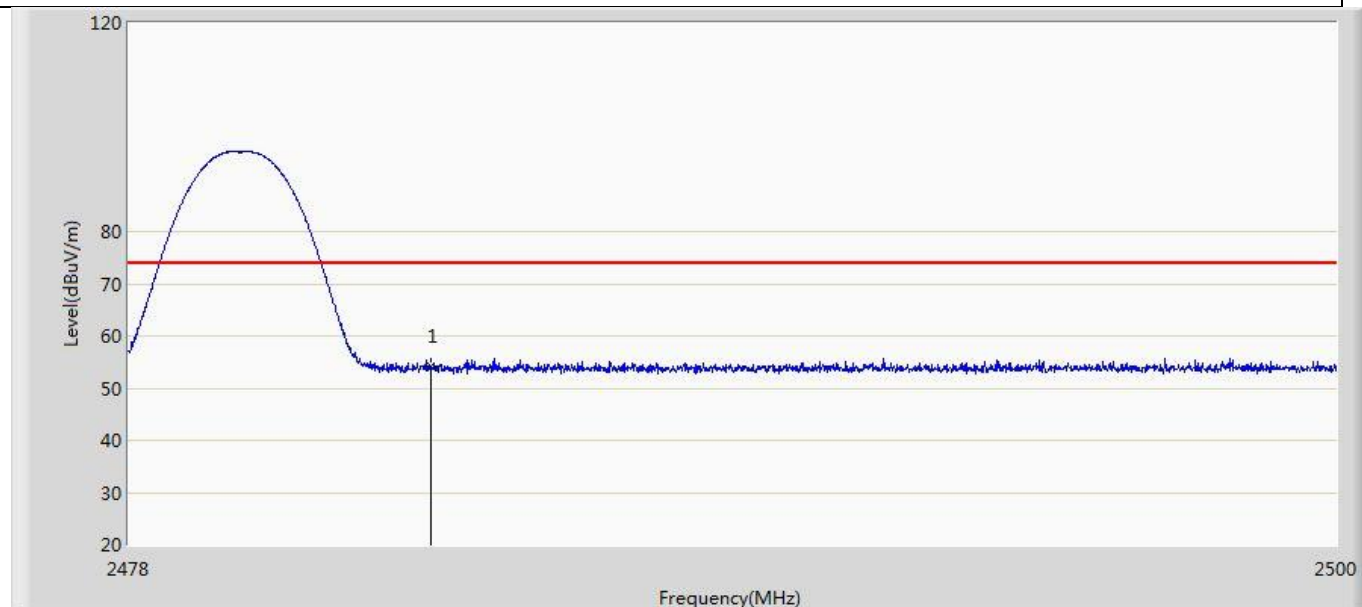


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	54.368	15.914	-19.632	74.000	38.453	PK

Profile: 21C0559R	Page No.: 9
Engineer: Carlosshen	
Site: AC5	Time: 2022/01/24 - 19:54
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: 8675I	Power: battery 3.85V
Note: Mode 2:Transmit at 2402MHz by 2DH5	

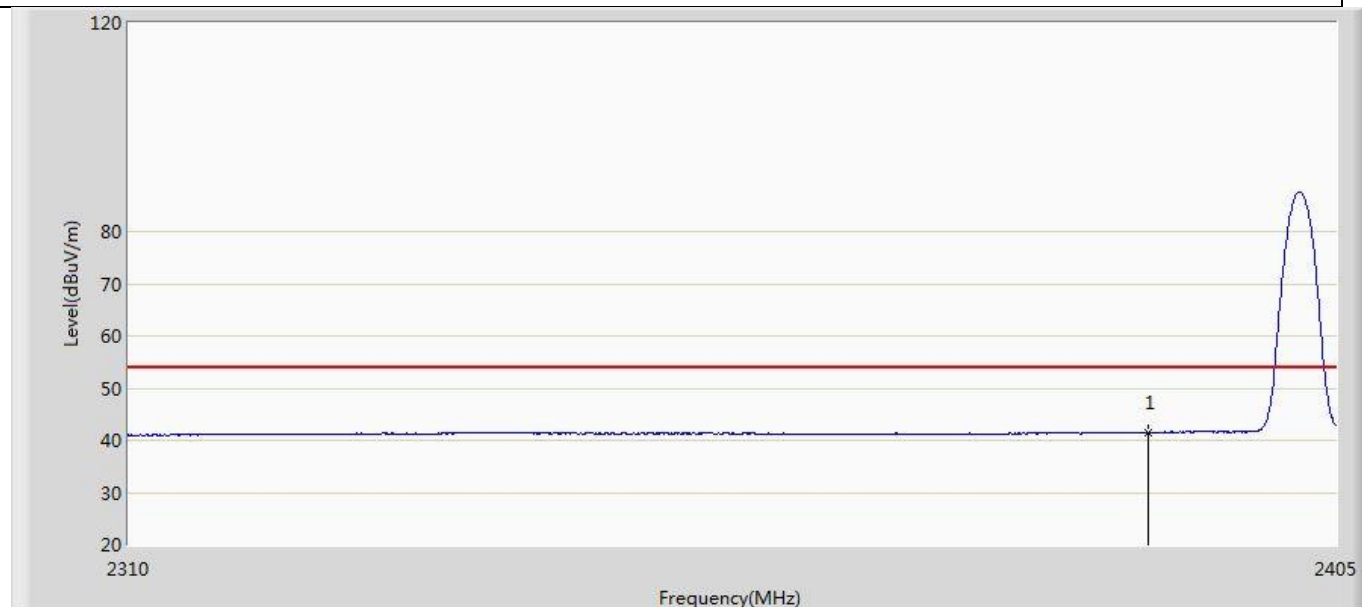


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	41.493	3.188	-12.507	54.000	38.305	AV

Profile: 21C0559R	Page No.: 10
Engineer: Carlosshen	
Site: AC5	Time: 2022/01/24 - 19:57
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: 8675I	Power: battery 3.85V
Note: Mode 2:Transmit at 2402MHz by 2DH5	

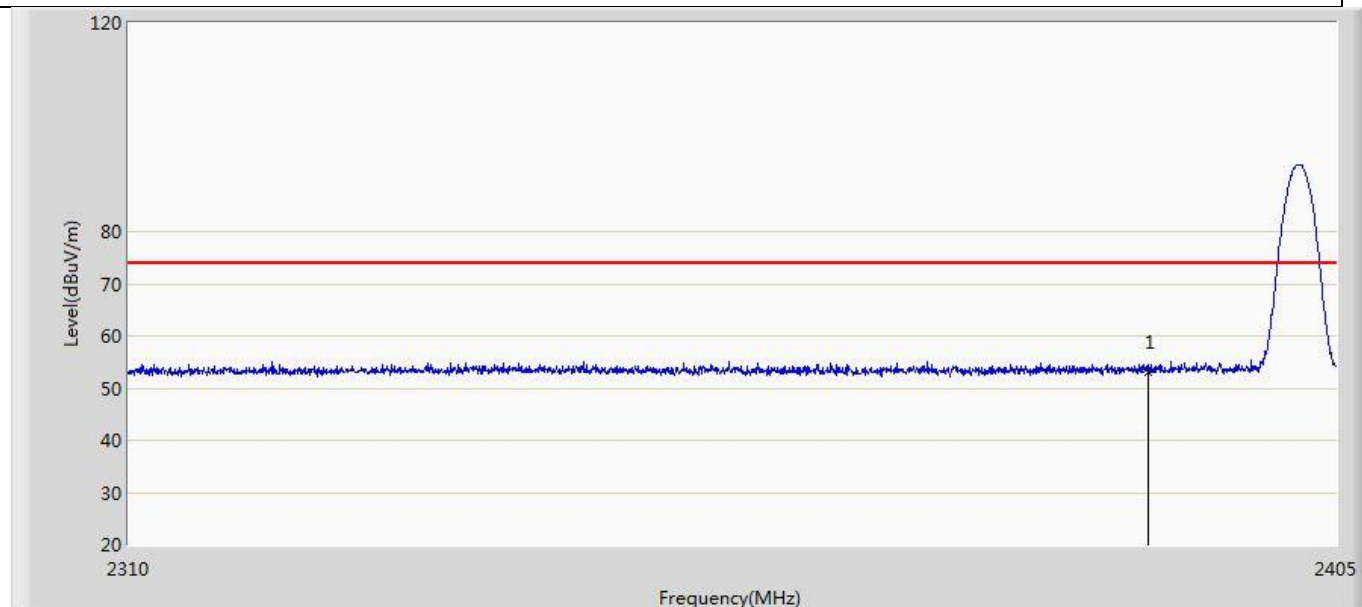


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	53.092	14.787	-20.908	74.000	38.305	PK

Profile: 21C0559R	Page No.: 11
Engineer: Carlosshen	
Site: AC5	Time: 2022/01/24 - 22:11
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: 8675I	Power: battery 3.85V
Note: Mode 2:Transmit at 2402MHz by 2DH5	

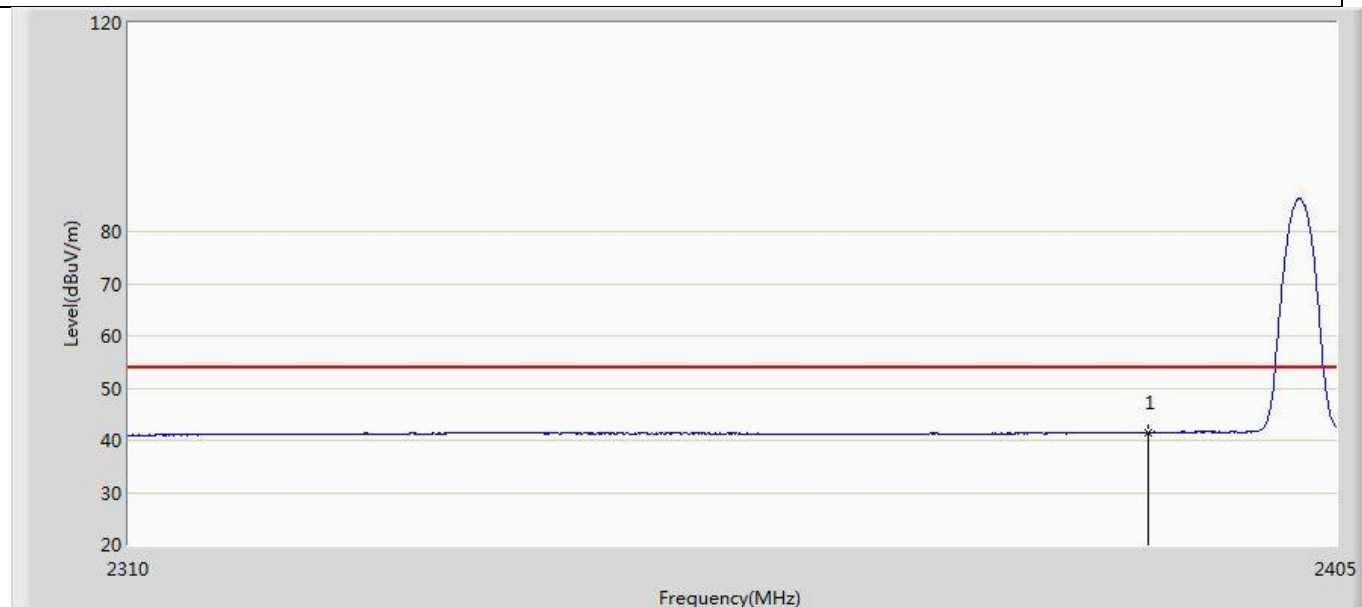


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	41.504	3.199	-12.496	54.000	38.305	AV

Profile: 21C0559R	Page No.: 12
Engineer: Carlosshen	
Site: AC5	Time: 2022/01/24 - 22:12
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: 8675I	Power: battery 3.85V
Note: Mode 2:Transmit at 2402MHz by 2DH5	

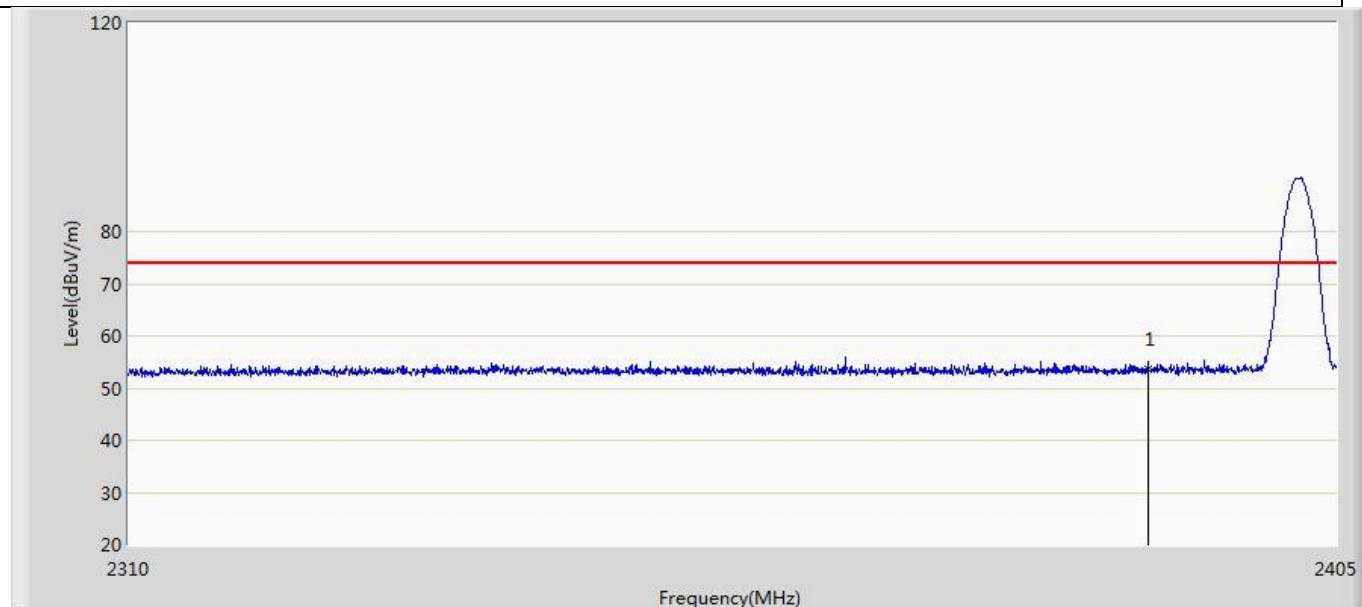


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	53.490	15.185	-20.510	74.000	38.305	PK

Profile: 21C0559R	Page No.: 13
Engineer: Carlosshen	
Site: AC5	Time: 2022/01/24 - 22:14
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: 8675I	Power: battery 3.85V
Note: Mode 2:Transmit at 2480MHz by 2DH5	

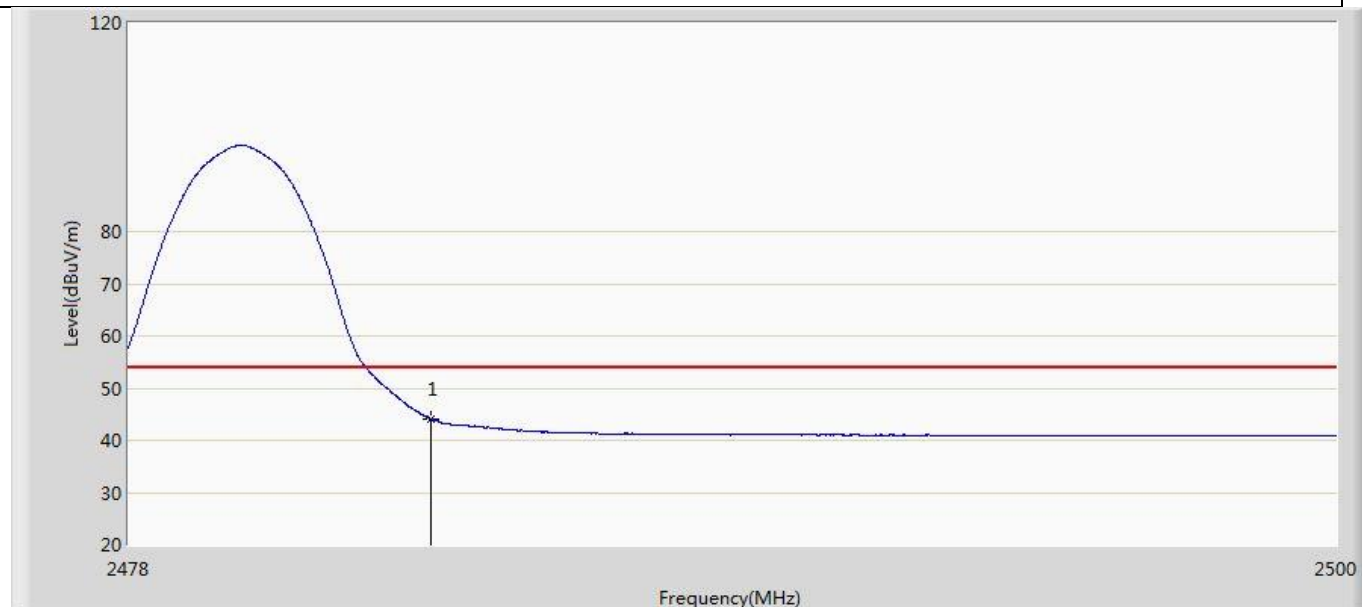


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	44.073	5.619	-9.927	54.000	38.453	AV

Profile: 21C0559R	Page No.: 14
Engineer: Carlosshen	
Site: AC5	Time: 2022/01/24 - 22:16
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: 8675I	Power: battery 3.85V
Note: Mode 2:Transmit at 2480MHz by 2DH5	

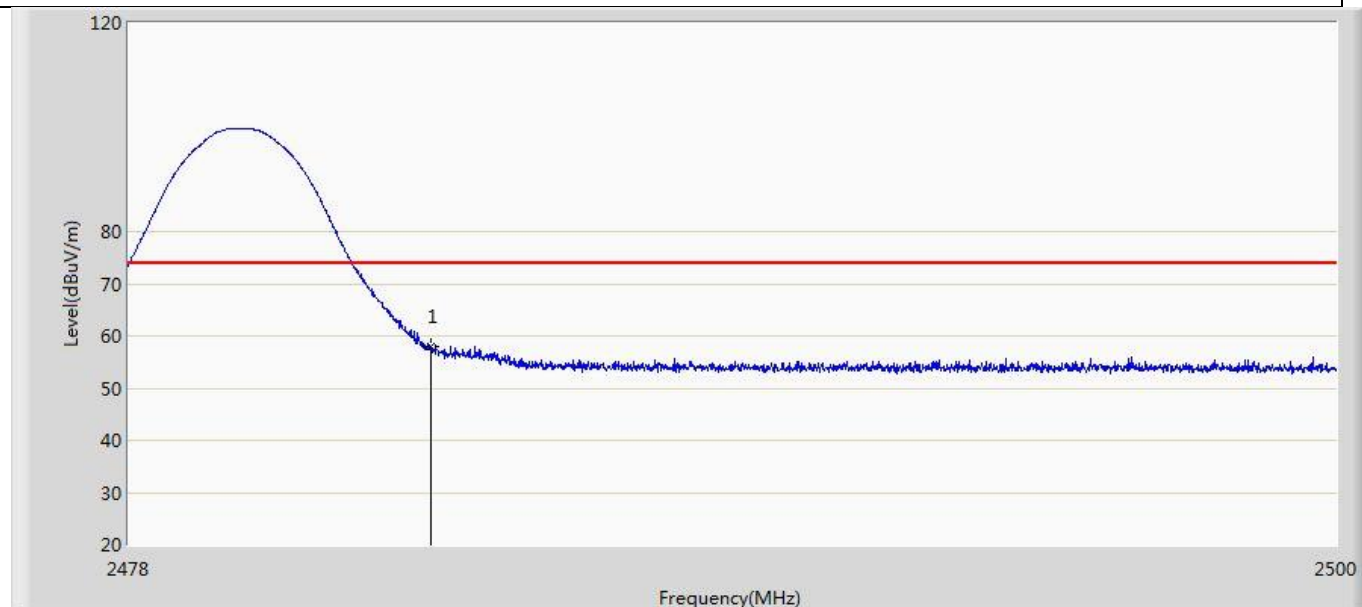


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	57.919	19.465	-16.081	74.000	38.453	PK

Profile: 21C0559R	Page No.: 15
Engineer: Carlosshen	
Site: AC5	Time: 2022/01/24 - 22:17
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: 8675I	Power: battery 3.85V
Note: Mode 2:Transmit at 2480MHz by 2DH5	

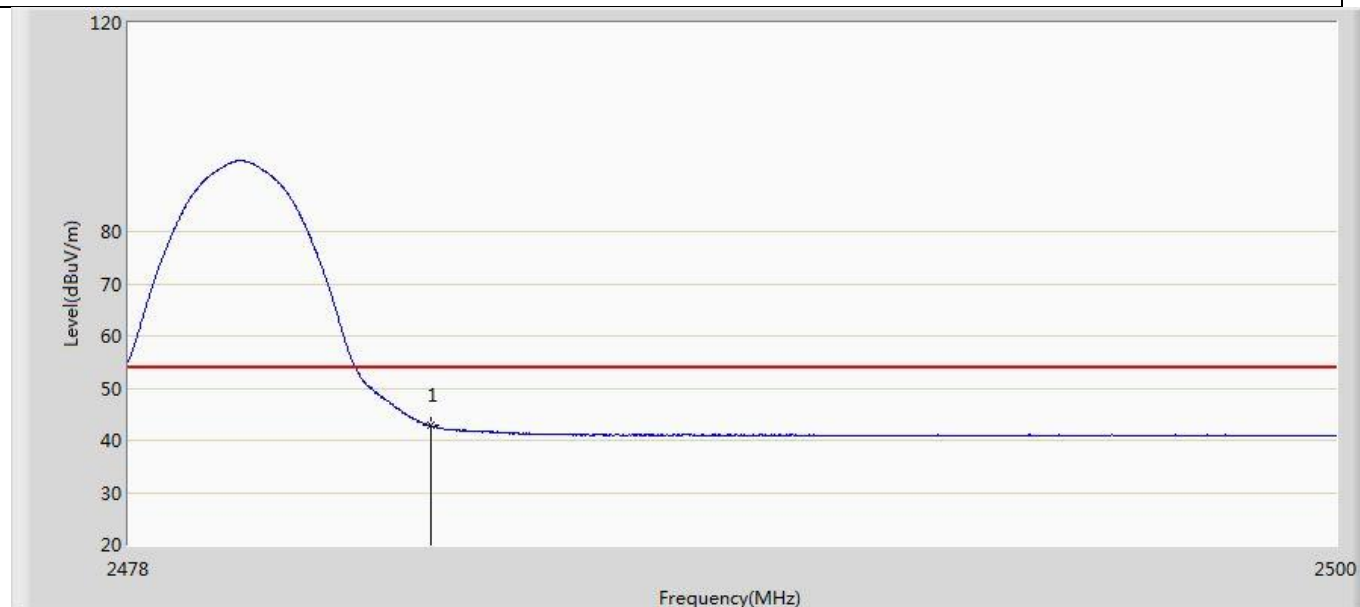

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	42.769	4.315	-11.231	54.000	38.453	AV

Profile: 21C0559R	Page No.: 16
Engineer: Carlosshen	
Site: AC5	Time: 2022/01/24 - 22:18
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: 8675I	Power: battery 3.85V
Note: Mode 2:Transmit at 2480MHz by 2DH5	

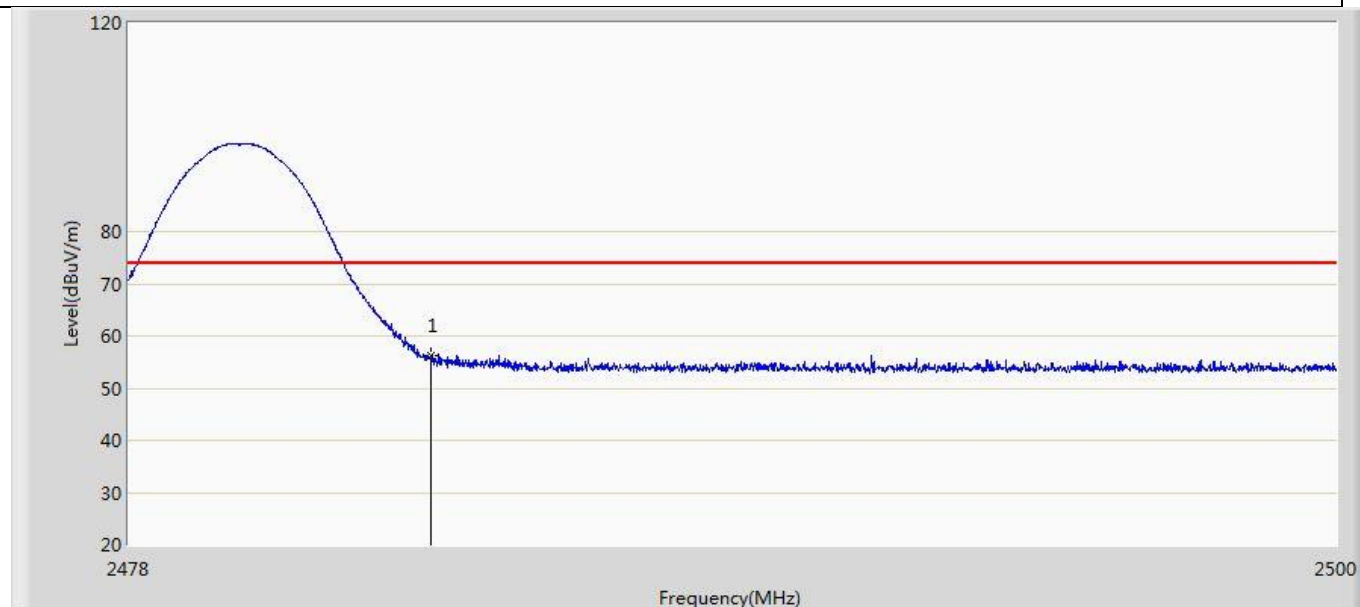


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	56.159	17.705	-17.841	74.000	38.453	PK

Profile: 21C0559R	Page No.: 17
Engineer: Carlosshen	
Site: AC5	Time: 2022/01/24 - 22:20
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: 8675I	Power: battery 3.85V
Note: Mode 3:Transmit at 2402MHz by 3DH5	




No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	41.522	3.217	-12.478	54.000	38.305	AV

Profile: 21C0559R	Page No.: 18
Engineer: Carlosshen	
Site: AC5	Time: 2022/01/24 - 22:22
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: 8675I	Power: battery 3.85V
Note: Mode 3:Transmit at 2402MHz by 3DH5	

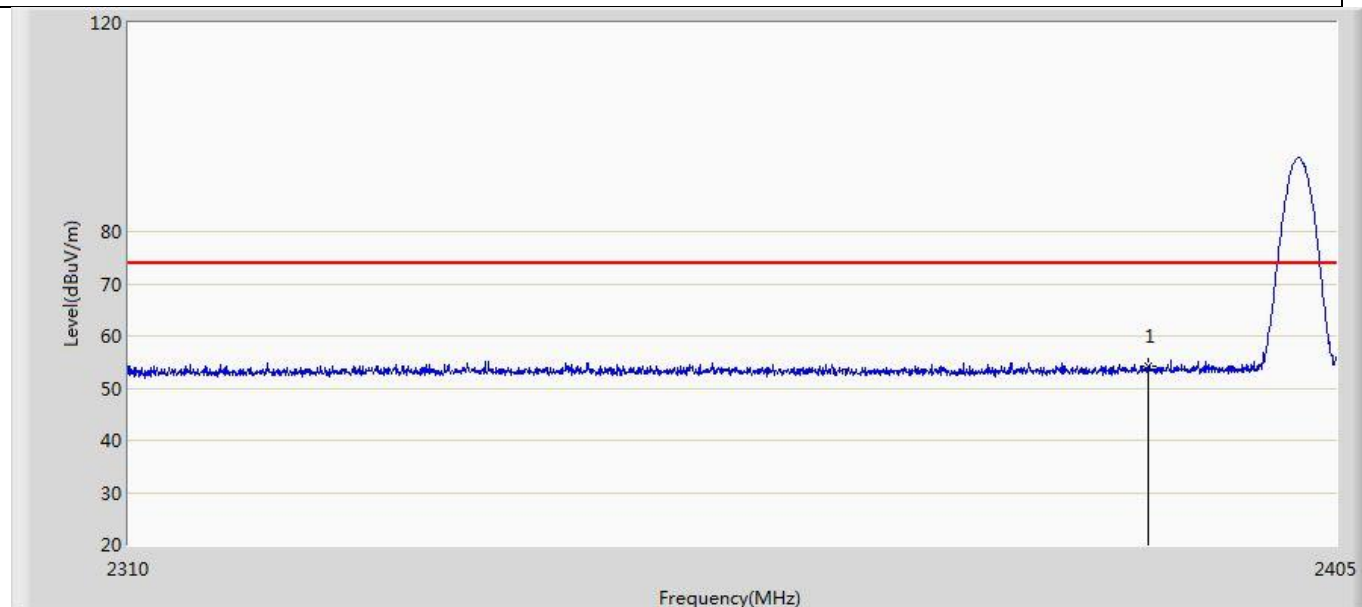


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	54.107	15.802	-19.893	74.000	38.305	PK

Profile: 21C0559R	Page No.: 19
Engineer: Carlosshen	
Site: AC5	Time: 2022/01/24 - 22:23
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: 8675I	Power: battery 3.85V
Note: Mode 3:Transmit at 2402MHz by 3DH5	

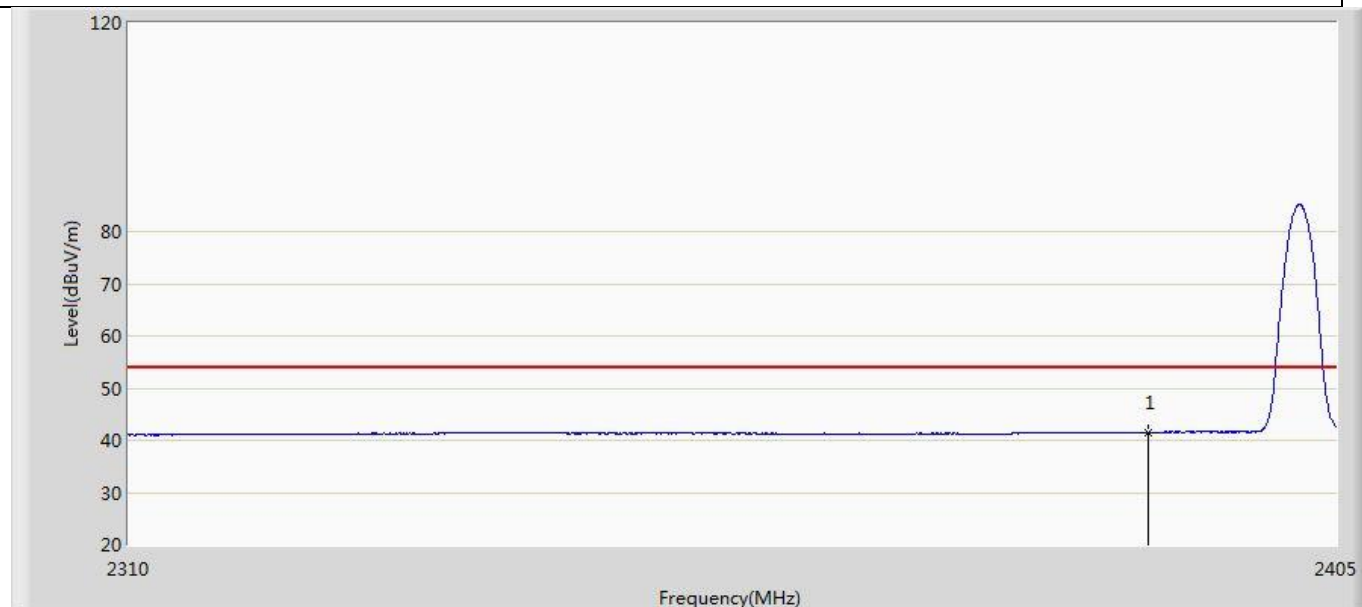


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	41.517	3.212	-12.483	54.000	38.305	AV

Profile: 21C0559R	Page No.: 20
Engineer: Carlosshen	
Site: AC5	Time: 2022/01/24 - 22:24
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: 8675I	Power: battery 3.85V
Note: Mode 3:Transmit at 2402MHz by 3DH5	

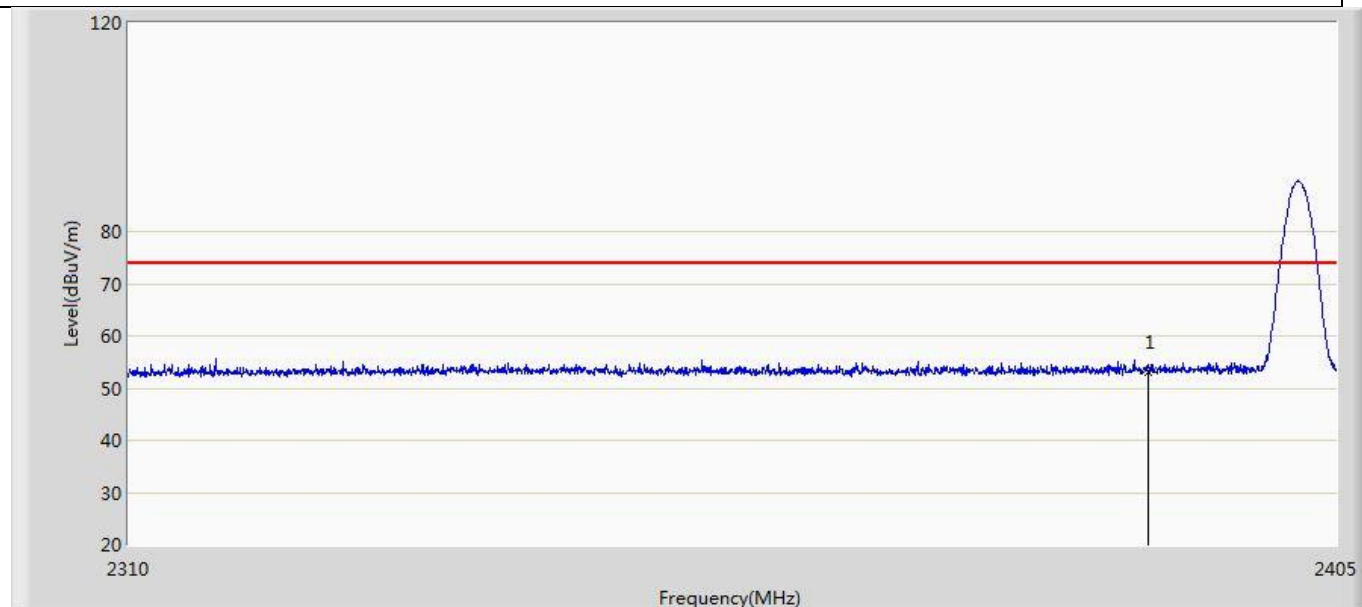


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	53.092	14.787	-20.908	74.000	38.305	PK

Profile: 21C0559R	Page No.: 21
Engineer: Carlosshen	
Site: AC5	Time: 2022/01/24 - 22:26
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: 8675I	Power: battery 3.85V
Note: Mode 3:Transmit at 2480MHz by 3DH5	

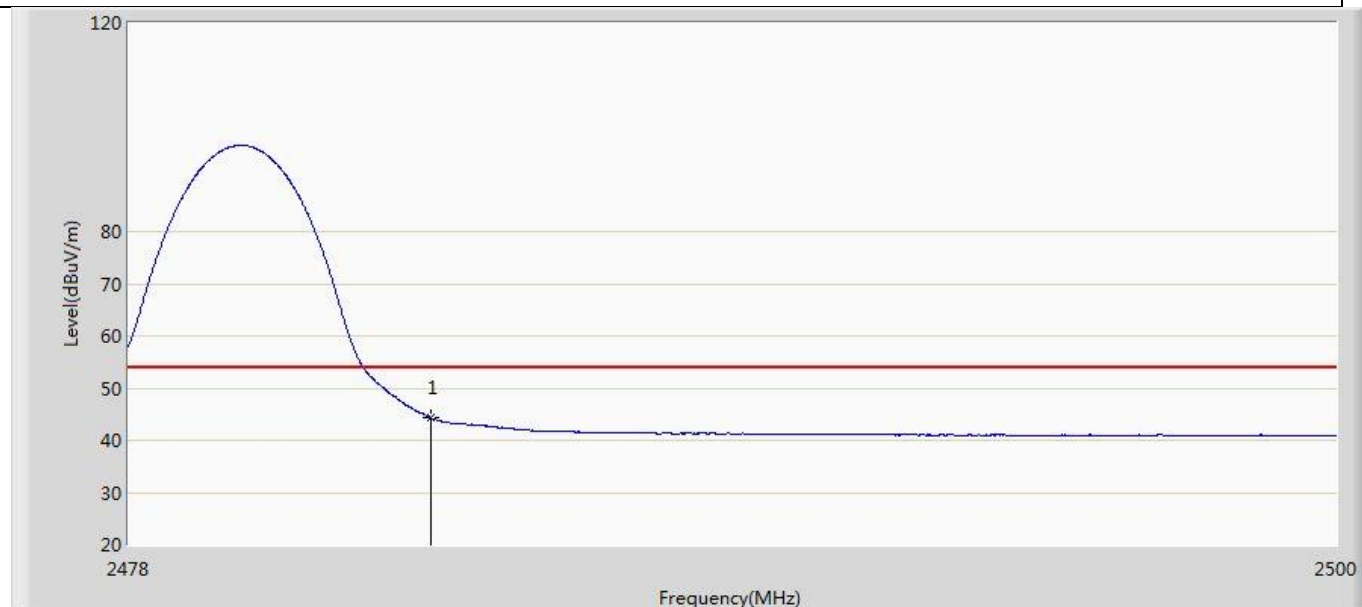


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	44.253	5.799	-9.747	54.000	38.453	AV

Profile: 21C0559R	Page No.: 22
Engineer: Carlosshen	
Site: AC5	Time: 2022/01/24 - 22:27
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: 8675I	Power: battery 3.85V
Note: Mode 3:Transmit at 2480MHz by 3DH5	

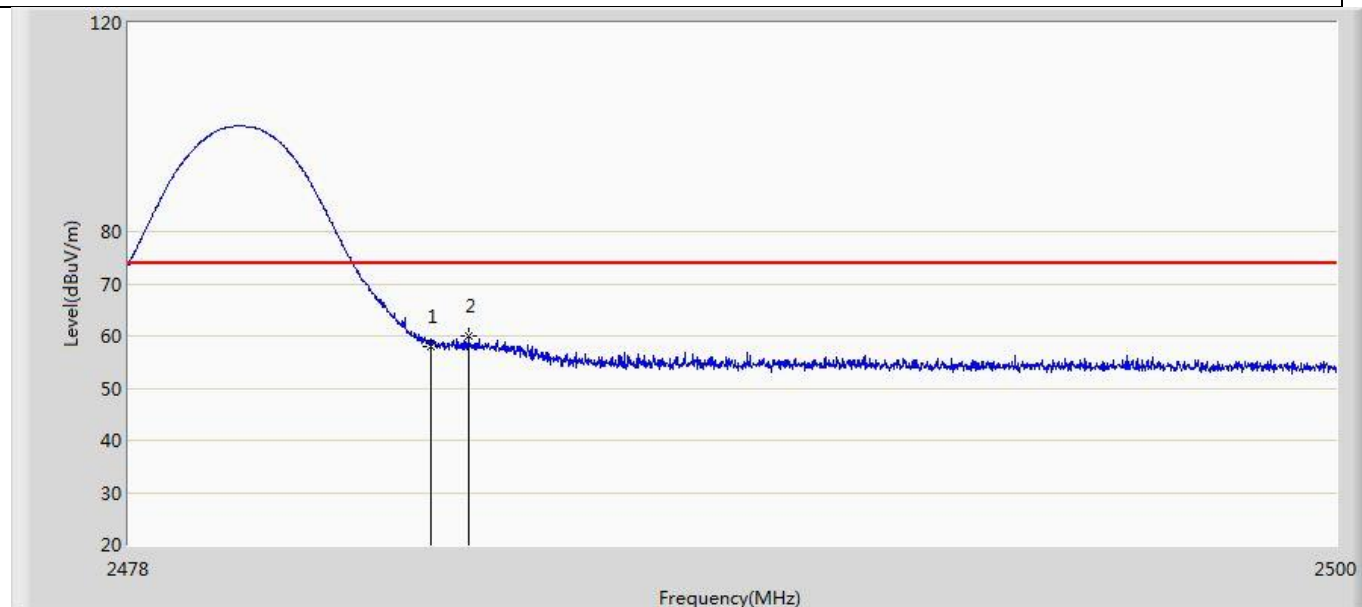


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2483.500	58.090	19.636	-15.910	74.000	38.453	PK
2	*	2484.171	59.881	21.426	-14.119	74.000	38.456	PK

Profile: 21C0559R	Page No.: 23
Engineer: Carlosshen	
Site: AC5	Time: 2022/01/24 - 22:28
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: 8675I	Power: battery 3.85V
Note: Mode 3:Transmit at 2480MHz by 3DH5	

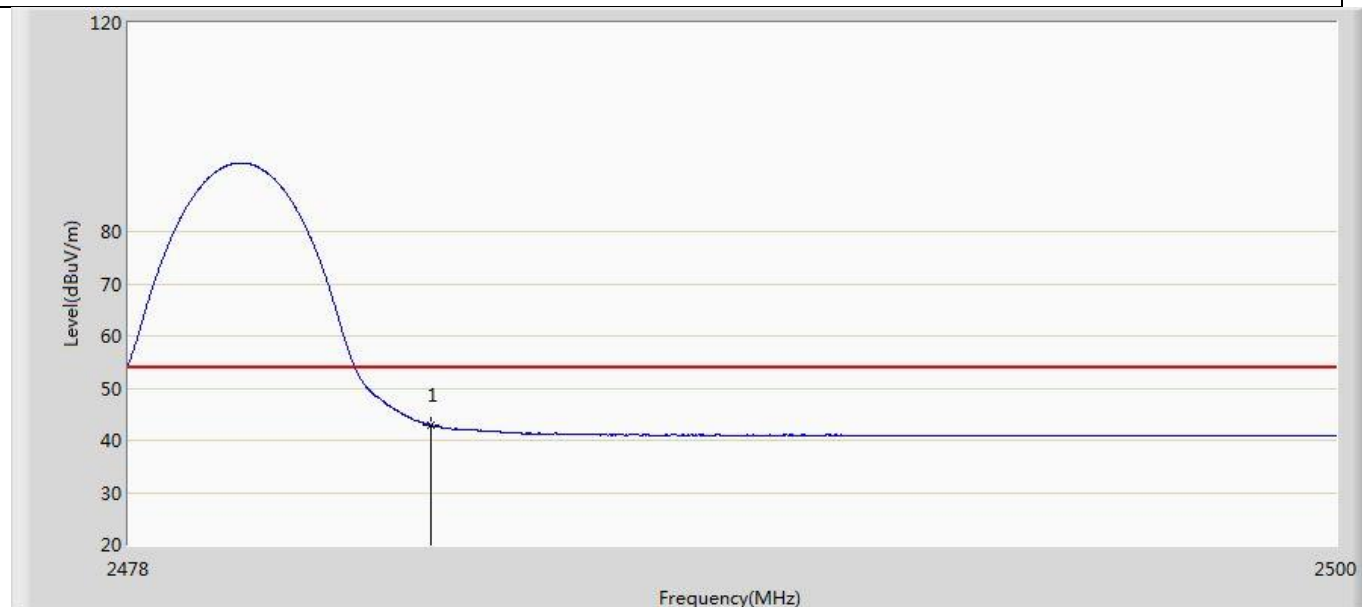

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	42.793	4.339	-11.207	54.000	38.453	AV

Profile: 21C0559R	Page No.: 24
Engineer: Carlosshen	
Site: AC5	Time: 2022/01/24 - 22:30
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: 8675I	Power: battery 3.85V
Note: Mode 3:Transmit at 2480MHz by 3DH5	

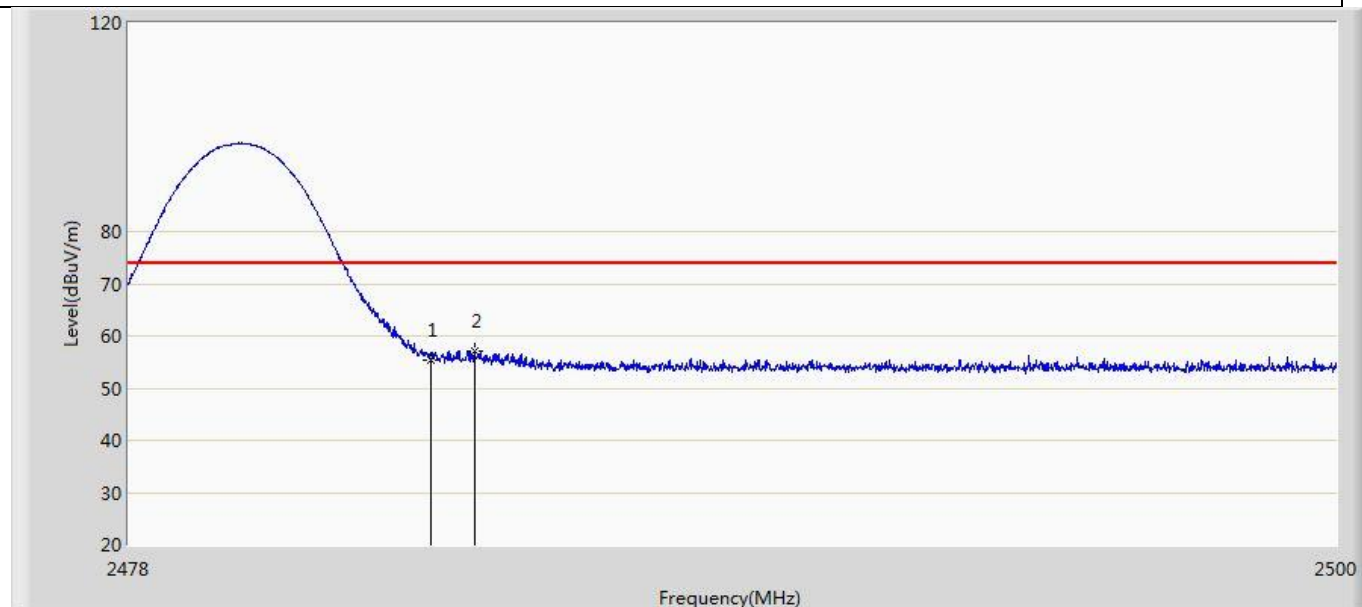

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2483.500	55.231	16.777	-18.769	74.000	38.453	PK
2	*	2484.281	57.203	18.747	-16.797	74.000	38.456	PK

4.11 Antenna Requirement**VERDICT: PASS****4.11.1 Limit:****Standard**

FCC Part 15 Subpart C Paragraph 15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

4.11.2 Antenna Connector Construction:

- | | |
|--|--|
| ☒ | The use of a permanently attached antenna |
| ☐ | The antenna use of a unique coupling to the intentional radiator |
| ☐ | The use of a nonstandard antenna jack or electrical connector |

Please refer to the attached document "Internal Photograph" to show the antenna connector.

5 TEST SETUP PHOTO AND EUT PHOTO

Remark: The test setup photo and EUT Photo please see appendix.

_____ The End _____