


Test report No:
21C0559R-RF-US-P06V02

FCC & ISED TEST REPORT

Product Name	Barcode Scanner
Trademark	Honeywell
Model and /or type reference	8675i
FCC ID	HD5-8675A
IC	1693B-8675A
Applicant's name / address	HONEYWELL INTERNATIONAL INC Honeywell Safety and Productivity Solutions 9680 OLD BAILES RD FORT MILL SC 29707-7539,USA
Test method requested, standard	FCC CFR Title 47 Part 15 Subpart C Section 15.247 ANSI C63.10: 2013 KD558074 D01 15.247 Meas Guidance v05r02 RSS-Gen Issue 5 RSS-247 Issue 2
Verdict Summary	IN COMPLIANCE
Tested by (name / position & signature)	Tim Cao/ Project Engineer 
Approved by (name / position & signature)	Jack Zhang/ Supervisor 
Date of issue	2022-03-17
Report Version	V1.1
Report template No	Template_FCC 15.247-RF-V1.0

INDEX

	page
General conditions	4
Environmental conditions	4
Possible test case verdicts	5
Abbreviations	5
Document History	6
Remarks and Comments.....	6
Used Equipment	7
Uncertainty	8
1 General Information.....	9
1.1 General Description of the Item(s)	9
1.2 Antenna Information	10
1.3 Channel List	11
2 Description of Test Setup	12
2.1 Operating mode(s) used for tests.....	12
2.2 Auxiliary equipment / Test software for the EUT.....	12
2.3 Test Configuration / Block diagram used for tests	13
2.4 Testing process	14
3 Verdict summary section	15
3.1 Standards.....	15
3.2 Deviation(s) from the Standard(s) / Test Specification(s).....	15
3.3 Overview of results.....	16
3.4 Test Facility.....	17
4 Test Results	18
4.1 AC Power Line Conducted Emission	18
4.1.1 Limit	18
4.1.2 Test Setup.....	18
4.1.3 Test Procedure.....	18
4.1.4 Test Data	19
4.2 Emissions in restricted frequency bands	20
4.2.1 Limit	20
4.2.2 Test Setup.....	22
4.2.3 Test Procedure.....	23
4.2.4 Test Data	24
4.3 Emissions in non-restricted frequency band.....	32

4.3.1	Limit	32
4.3.2	Test Setup.....	32
4.3.3	Test Procedure.....	32
4.3.4	Test Data	33
4.4	Duty cycle	34
4.4.1	Limit	34
4.4.2	Test Setup.....	34
4.4.3	Test Procedure.....	34
4.4.4	Test Data	35
4.5	Band Edge	36
4.5.1	Limit	36
4.5.2	Test Setup.....	36
4.5.3	Test Procedure.....	36
4.5.4	Test Data	37
4.6	DTS Bandwidth	45
4.6.1	Limit	45
4.6.2	Test Setup.....	45
4.6.3	Test Procedure.....	45
4.6.4	Test Data	46
4.7	Fundamental emission output power	47
4.7.1	Limit	47
4.7.2	Test Setup.....	47
4.7.3	Test Procedure.....	48
4.7.4	Test Data	49
4.8	Power Density	50
4.8.1	Limit:	50
4.8.2	Test Setup.....	50
4.8.3	Test Procedure.....	50
4.8.4	Test Data	51
4.9	Antenna Requirement.....	52
4.9.1	Limit:	52
4.9.2	Antenna Connector Construction:	52
5	Test setup photo and EUT Photo.....	53

COMPETENCES AND GUARANTEES

DEKRA is a testing laboratory competent to carry out the tests described in this report.

In order to assure the traceability to other national and international laboratories, DEKRA has a calibration and maintenance program for its measurement equipment.

DEKRA guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated in the report and it is based on the knowledge and technical facilities available at DEKRA at the time of performance of the test.

DEKRA is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA.

GENERAL CONDITIONS

Test Location	No. 99, Hongye Road, Suzhou Industrial Park Suzhou, 215006, P.R. China
Date(receive sample)	Jan. 10, 2022
Date (start test)	Jan. 11, 2022
Date (finish test)	Jan. 26, 2022

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or Competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA.

ENVIRONMENTAL CONDITIONS

The climatic conditions during the tests are within the limits specified by the manufacturer for the operation of the EUT and the test equipment. The climatic conditions during the tests were within the following limits:

Ambient temperature	15 °C – 35 °C
Relative Humidity air	30% - 60%

If explicitly required in the basic standard or applied product / product family standard the climatic values are recorded and documented separately in this test report.

POSSIBLE TEST CASE VERDICTS

Test case does not apply to test object	N/A
Test object does meet requirement	P (Pass) / PASS
Test object does not meet requirement	F (Fail) / FAIL
Not measured	N/M

ABBREVIATIONS

For the purposes of the present document, the following abbreviations apply:

EUT	: Equipment Under Test
QP	: Quasi-Peak
CAV	: CISPR Average
AV	: Average
CDN	: Coupling Decoupling Network
SAC	: Semi-Anechoic Chamber
OATS	: Open Area Test Site
BW	: Bandwidth
AM	: Amplitude Modulation
PM	: Pulse Modulation
HCP	: Horizontal Coupling Plane
VCP	: Vertical Coupling Plane
U_N	: Nominal voltage
T_x	: Transmitter
R_x	: Receiver
N/A	: Not Applicable
N/M	: Not Measured

DOCUMENT HISTORY

Report No.	Version	Description	Issued Date
21C0559R-RF-US-P06V02	V1.0	Initial issue of report.	2022-03-11
21C0559R-RF-US-P06V02	V1.1	Page 46: Update test data and data plot. (The test report No.: 21C0559R-RF-US-P06V02 V1.1 is to replace the test report No.: 21C0559R-RF-US-P06V02 V1.0, and test report 21C0559R-RF-US-P06V02 V1.0 is obsoleted.)	2022-03-17

REMARKS AND COMMENTS

1. The equipment under test (EUT) does meet the essential requirements of the stated standard(s)/test(s).
2. These test results on a sample of the device are for the purpose of demonstrating Compliance with Part 15 Subpart C Paragraph 15.247, RSS-Gen Issue 5, RSS-247 Issue 2.
3. The measurement result is considered in conformance with the requirement if it is within the prescribed limit, It is not necessary to account the uncertainty associated with the measurement result.
4. The test results presented in this report relate only to the object tested.
5. The test report shall not be reproduced without the written approval of DEKRA Testing and Certification (Suzhou) Co., Ltd.
6. This report will not be used for social proof function in China market.
7. DEKRA declines any responsibility with the following test data provided by customer that may affect the validity of result:
 - Chapter 1.1 General Description of the Item(s);
 - Chapter 1.2 Antenna Information;
 - Chapter 1.3 Channel List.
8. The product has 2 Engine(S0703 & N0803) which don't have any RF component, so we perform both the S0703 & N0803 for the pre-test, and use S0703 for the all test due to the worst pre-test data.

USED EQUIPMENT

AC Power Line Conducted Emission / TR1

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
EMI Test Receiver	R&S	ESCI	100906	2021.04.28	2022.04.27
Two-Line V-Network	R&S	ENV216	101044	2021.03.20	2022.03.19
50ohm Termination	SHX	TF2	7081403	2021.09.04	2022.09.03
50ohm Coaxial Switch	Anritsu	MP59B	6200464462	N/A	N/A
Temperature/Humidity Meter	RTS	RTS-8S	TR1-TH	2021.07.09	2022.07.08
Dekra test software	Dekra	-	-	-	-

Emissions in non-restricted frequency bands/ Occupied Bandwidth/ Fundamental emission output power/ Power Spectral Density/Band Edge/ TR8

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
Spectrum Analyzer	Agilent	N9010A	MY48030494	2021.07.11	2022.07.10
EXA Spectrum Analyzer	Keysight	N9010A	MY55370495	2021.03.20	2022.03.19
MXA Signal Analyzer	Keysight	N9020A	MY56060147	2021.07.11	2022.07.10
4TX MIMO Power Sensor	Keysight	X8750A	MY59400102	2021.02.11	2022.02.10
Coaxial Cable	Woken	SFL402	F02-150410-044	2022.01.02	2022.01.01
Temperature/Humidity Meter	RTS	RTS-8S	RF08	2021.07.09	2022.07.08

Radiated Emission(30MHz-1GHz) / AC3

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
EMI Test Receiver	R&S	ESCI	100176	2021.08.15	2022.08.14
Loop Antenna	R&S	HFH2-Z2	833799/003	2021.03.04	2022.03.03
Bilog Antenna	Teseq GmbH	CBL6112D	27613	2021.08.23	2022.08.22
Coaxial Cable	Huber+Suhner	RG 214	AC3-C	2021.03.31	2022.03.30
Temperature/Humidity Meter	RTS	RTS-8S	AC3-TH	2021.11.23	2022.11.22
Dekra test software	Dekra	-	-	-	-

UNCERTAINTY

Uncertainties have been calculated according to the DEKRA internal document. The reported expanded uncertainties are based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%. The Uncertainties is comply with standard required as below.

Test item	Uncertainty
AC Power Line Conducted Emission	9kHz~150kHz: 2.80dB 150kHz~30MHz: 2.40dB
Peak Power Output	± 1.27 dB
Radiated Emission(30MHz~1GHz)	Horizontal: 30MHz~200MHz: 3.50 dB 300MHz~1GHz: 3.60 dB Vertical: 30MHz~200MHz: 3.60 dB 300MHz~1GHz: 3.50 dB
Radiated Emission(1GHz~26.5GHz)	Horizontal: 1GHz~18GHz: 5.00 dB Vertical: 1GHz~18GHz: 4.80 dB
RF antenna conducted test	± 1.27 dB
Radiated Emission Band Edge	± 3.9 dB
DTS Bandwidth	± 150 Hz
Occupied Bandwidth	± 1 kHz
Power Density	± 1.27 dB

1 GENERAL INFORMATION

1.1 General Description of the Item(s)

Product Name..... :	Barcode Scanner
Model No. :	8675i
FCC ID :	HD5-8675A
IC..... :	1693B-8675A
Manufacturer..... :	HONEYWELL INTERNATIONAL INC Honeywell Safety and Productivity Solutions
Manufacturer Address..... :	9680 OLD BAILES RD FORT MILL SC 29707-7539,USA

Wireless specification..... :	Bluetooth 4.0				
Operating frequency range(s)..... :	2400~2483.5MHz				
Type of Modulation..... :	GFSK				
PHYS..... :	☒	LE 1M	☐	LE 2M	☐ LE Coded S=2/8
Data Rate..... :	☒	1Mbit/s	☐	2Mbit/s	☐ 500/125 Kbit/s
Number of channel..... :	40				

Rated power supply	Voltage and Frequency	
	☐	AC: 220 – 240 V, 50/60 Hz
	☐	AC: 110 – 130 Vac, 50/60 Hz
	☐	DC: 12V
	☒	Battery: 3.85V

1.2 Antenna Information

Antenna model / type number.....:	N/A		
Antenna serial number	N/A		
Antenna Delivery	☒	1TX + 1RX	
	☐	2TX + 2RX	
	☐	Others:.....	
Antenna technology.....:	☒	SISO	
	☐	MIMO	☐ CDD
	☐		☐ Beam-forming
Antenna Type.....:	☐	External	☐ Dipole
	☐		☐ Sectorized
	☒	Internal	☒ FPC
	☐		☐ PCB
	☐		☐ Dipole
	☐		☐ Others:.....
Antenna Gain.....:	0.82 dBi		

1.3 Channel List

Bluetooth Working Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
00	2402 MHz	01	2404 MHz	02	2406 MHz	03	2408 MHz
04	2410 MHz	05	2412 MHz	06	2414 MHz	07	2416 MHz
08	2418 MHz	09	2420 MHz	10	2422 MHz	11	2424 MHz
12	2426 MHz	13	2428 MHz	14	2430 MHz	15	2432 MHz
16	2434 MHz	17	2436 MHz	18	2438 MHz	19	2440 MHz
20	2442 MHz	21	2444 MHz	22	2446 MHz	23	2448 MHz
24	2450 MHz	25	2452 MHz	26	2454 MHz	27	2456 MHz
28	2458 MHz	29	2460 MHz	30	2462 MHz	31	2464 MHz
32	2466 MHz	33	2468 MHz	34	2470 MHz	35	2472 MHz
36	2474 MHz	37	2476 MHz	38	2478 MHz	39	2480 MHz

Note: The general description of the Item(s), antenna information and channel list in clause 1 are provided and confirmed by the client.

2 DESCRIPTION OF TEST SETUP

2.1 Operating mode(s) used for tests

During the tests the following operating mode(s) has(have) been used.


Test Mode For Bluetooth	Mode1: Transmit by LE_1Mbps
-------------------------	-----------------------------

2.2 Auxiliary equipment / Test software for the EUT


Auxiliary equipment	Type / Version	Manufacturer	Supplied by
Notebook	2526	Think Pad	N/A
Software	Type / Version	Manufacturer	Supplied by
Ampak RFTestTool	N/A	N/A	N/A

2.3 Test Configuration / Block diagram used for tests

Test setup Diagram- AC Line Conducted Emission Test

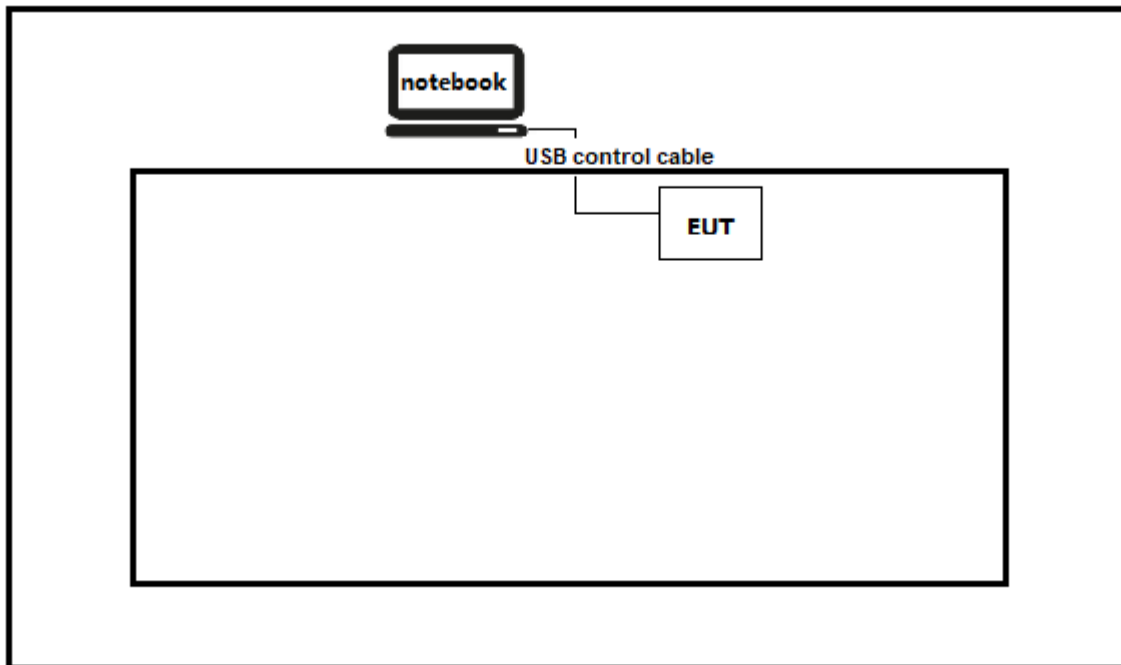

Test setup Diagram- Radiated Emission

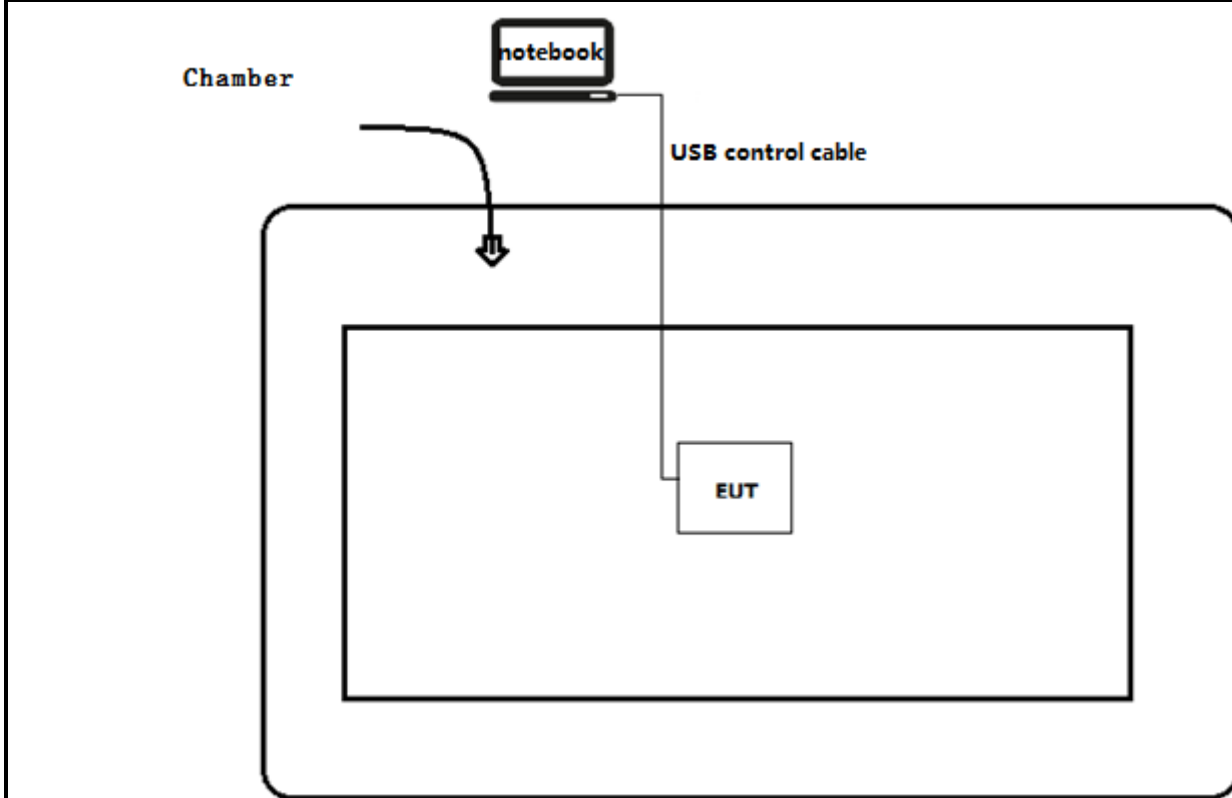

2.4 Testing process

1	Setup the EUT as shown in Section 2.3
2	Execute the test program.
3	Configure the test mode and test channel.
4	Verify that the EUT works properly.

3 VERDICT SUMMARY SECTION

This chapter presents an overview of standards and results. Refer to the next chapters for details of measured test results and applied test levels.

3.1 Standards

Standard	Year	Description
FCC CFR Title 47 Part 15 Subpart C Section 15.247	2021	Operation within the bands 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz.
ANSI C63.10	2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB558074 D01 v05r02	2019	Guidance for performing compliance measurements on Digital Transmission System (DTS) operating under section 15.247
RSS-Gen Issue 5 Amendment 2	2021	General Requirements for Compliance of Radio Apparatus
RSS-247 Issue 2	2017	Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices

3.2 Deviation(s) from the Standard(s) / Test Specification(s)

The following deviation(s) was / were made from the published requirements of the listed standards: N/A.

(Please define the deviations from the standard(s) if applicable)

3.3 Overview of results

For FCC

Requirement – Test case	Basic standard(s)	Verdict	Remark
AC Power Line Conducted Emission	FCC 15.207	N/A	---
Emissions in restricted frequency bands	FCC 15.247(b)(3)	PASS	---
Duty cycle	ANSI C63.10:2013	PASS	---
Emissions in non-restricted frequency bands	FCC 15.247(d), FCC 15.209	PASS	---
Band Edge	FCC 15.247(d)	PASS	---
Fundamental emission output power	FCC 15.247(d), FCC 15.209	PASS	---
DTS Bandwidth	FCC 15.247(a)(2)	PASS	---
Power Spectral Density	FCC 15.247(e)	PASS	---
Antenna Requirement	FCC 15.203	PASS	---

For ISED

Requirement – Test case	Basic standard(s)	Verdict	Remark
AC Power Line Conducted Emission	RSS-Gen Issue 5 Section 8.8	N/A	---
Emissions in restricted frequency bands	RSS-Gen Issue 5 Section 8.9	PASS	---
Duty cycle	ANSI C63.10:2013	PASS	---
Emissions in non-restricted frequency bands	RSS-247 Issue 2 Section 5.5	PASS	---
Band Edge	RSS-Gen Issue 5 Section 8.10	PASS	---
Fundamental emission output power	RSS-247 Issue 2 Section 5.4(d)	PASS	---
DTS Bandwidth	RSS-Gen Issue 5 Section 6.7	PASS	---
Power Spectral Density	RSS-247 Issue 2 Section 5.2(b)	PASS	---
Antenna Requirement	RSS-Gen Issue 5 Section 6.8	PASS	---

3.4 Test Facility

USA	:	FCC Designation Number: CN1199
CA	:	ISED CAB identifier: CN0040

4 TEST RESULTS

4.1 AC Power Line Conducted Emission

VERDICT: N/A

4.1.1 Limit

Standard	FCC Part 15 Subpart C Paragraph 15.207	
Frequency range [MHz]	Limit: QP [dB(μV) ¹⁾]	Limit: AV [dB(μV) ¹⁾]
0,15 - 0,50	66 - 56 ²⁾	56 - 46 ²⁾
0,50 - 5,0	56	46
5,0 - 30	60	50


¹⁾ At the transition frequency, the lower limit applies.

²⁾ The limit decreases linearly with the logarithm of the frequency.

NOTE 1: The exclusion band for transmitters shall be considered for transmitters operating at frequencies below 30 MHz.

NOTE 2: Where the AC output port is directly connected (or via a circuit breaker) to the AC power input port of the EUT the AC power output port need not to be tested.

4.1.2 Test Setup

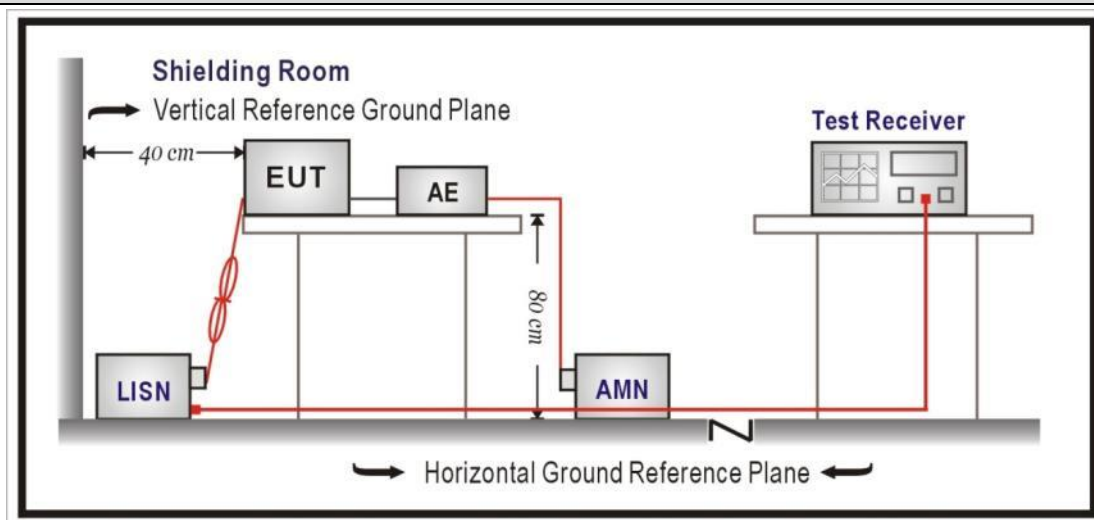

4.1.3 Test Procedure

	References Rule	Chapter	Item
☒	ANSI C63.10-2013	6.2	Standard test method for ac power-line conducted emissions from unlicensed wireless devices

4.1.4 Test Data

N/A (EUT is powered by battery)

4.2 Emissions in restricted frequency bands**VERDICT: PASS****4.2.1 Limit****Standard** FCC Part 15 Subpart C Paragraph 15.209

Restricted Bands of operationfor FCC

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 – 0.110	16.42 – 16.423	399.9 – 410	4.5 – 5.15
0.495 – 0.505	16.69475 – 16.69525	608 – 614	5.35 – 5.46
2.1735 – 2.1905	16.80425 – 16.80475	960 – 1240	7.25 – 7.75
4.125 – 4.128	25.5 – 25.67	1300 – 1427	8.025 – 8.5
4.17725 – 4.17775	37.5 – 38.25	1435 – 1626.5	9.0 – 9.2
4.20725 – 4.20775	73 – 74.6	1645.5 – 1646.5	9.3 – 9.5
6.215 – 6.218	74.8 – 75.2	1660 – 1710	10.6 – 12.7
6.26775 – 6.26825	108 – 121.94	1718.8 – 1722.2	13.25 – 13.4
6.31175 – 6.31225	123 – 138	2200 – 2300	14.47 – 14.5
8.291 – 8.294	149.9 – 150.05	2310 – 2390	15.35 – 16.2
8.362 – 8.366	156.52475 – 156.52525	2483.5 – 2500	17.7 – 21.4
8.37625 – 8.38675	156.7 – 156.9	2690 – 2900	22.01 – 23.12
8.81425 – 8.81475	162.0125 – 167.17	3260 – 3267	23.6 – 24.0
12.29 – 12.293	167.72 – 173.2	3332 – 3339	31.2 – 31.8
12.51975 – 12.52025	240 – 285	3345.8 – 3358	36.43 – 36.5
12.57675 – 12.57725	322 – 335.4	3600 – 4400	
13.36 – 13.41			

Restricted Bands of operationfor IC

0.090 - 0.110	13.36 - 13.41	960 - 1427	9.0 - 9.2
0.495 - 0.505	16.42 - 16.423	1435 - 1626.5	9.3 - 9.5
2.1735 - 2.1905	16.69475 - 16.69525	1645.5 - 1646.5	10.6 - 12.7
3.020 - 3.026	16.80425 - 16.80475	1660 - 1710	13.25 - 13.4
4.125 - 4.128	25.5 - 25.67	1718.8 - 1722.2	14.47 - 14.5
4.17725 - 4.17775	37.5 - 38.25	2200 - 2300	15.35 - 16.2
4.20725 - 4.20775	73 - 74.6	2310 - 2390	17.7 - 21.4
5.677 - 5.683	74.8 - 75.2	2483.5 - 2500	22.01 - 23.12
6.215 - 6.218	108 - 138	2655 - 2900	23.6 - 24.0
6.26775 - 6.26825	149.9 - 150.05	3260 - 3267	31.2 - 31.8
6.31175 - 6.31225	156.52475 - 156.52525	3332 - 3339	36.43 - 36.5
8.291 - 8.294	156.7 - 156.9	3345.8 - 3358	Above 38.6
8.362 - 8.366	162.0125 - 167.17	3500 - 4400	
8.37625 - 8.38675	167.72 - 173.2	4500 - 5150	
8.41425 - 8.41475	240 - 285	5350 - 5460	
12.29 - 12.293	322 - 335.4	7250 - 7750	
12.51975 - 12.52025	399.9 - 410	8025 - 8500	
12.57675 - 12.57725	608 - 614	--	

Restricted Band Emissions Limit

Frequency (MHz)	Field strength ($\mu\text{V/m}$)	Field strength ($\text{dB}\mu\text{V/m}$)	Measurement distance (m)
0.009 - 0.49	2400/F(kHz)	48.5 – 13.8	300 _(Note 1)
0.49 - 1.705	24000/F(kHz)	33.8 - 23	30 _(Note 1)
1.705 - 30	30	29.5	30 _(Note 1)
30 - 88	100	40	3 _(Note 2)
88-216	150	43.5	3 _(Note 2)
216 - 960	200	46	3 _(Note 2)
Above 960	500	54	3 _(Note 2)


Note 1: At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade).

Note 2: At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment.


Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

4.2.2 Test Setup


Below 30MHz Test Setup:

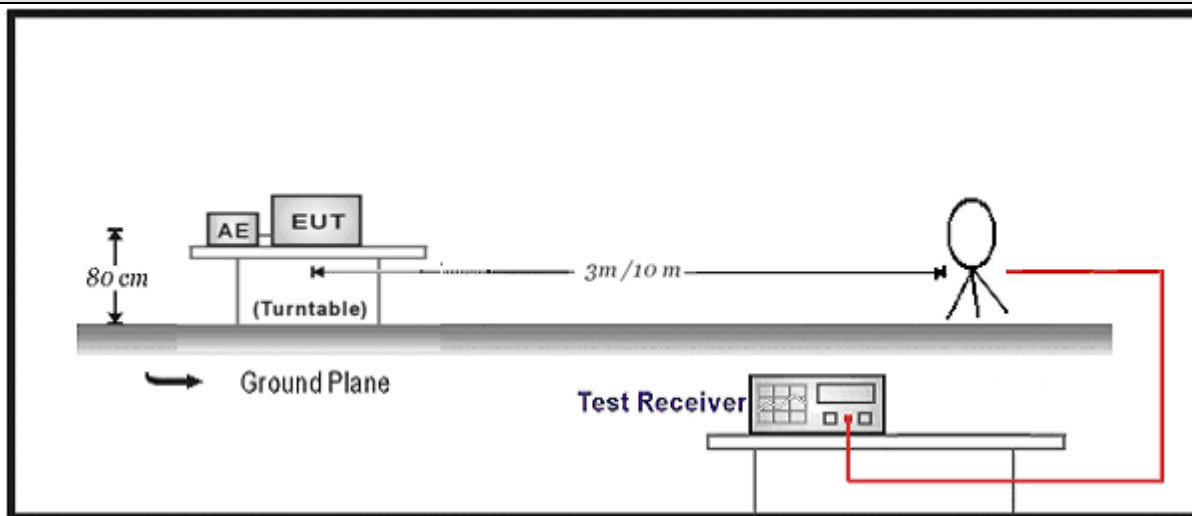

30MHz-1GHz Test Setup:

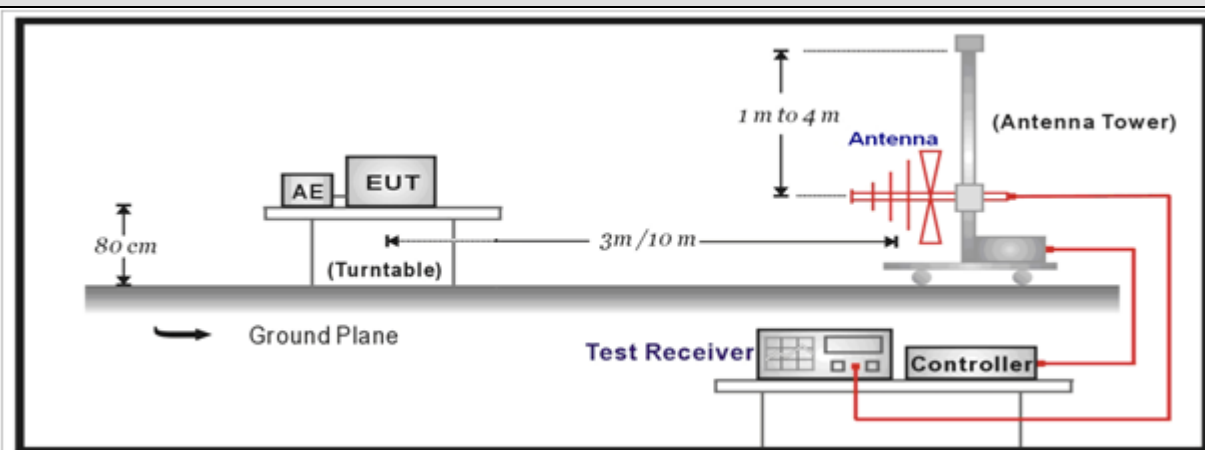

Above 1GHz Test Setup:

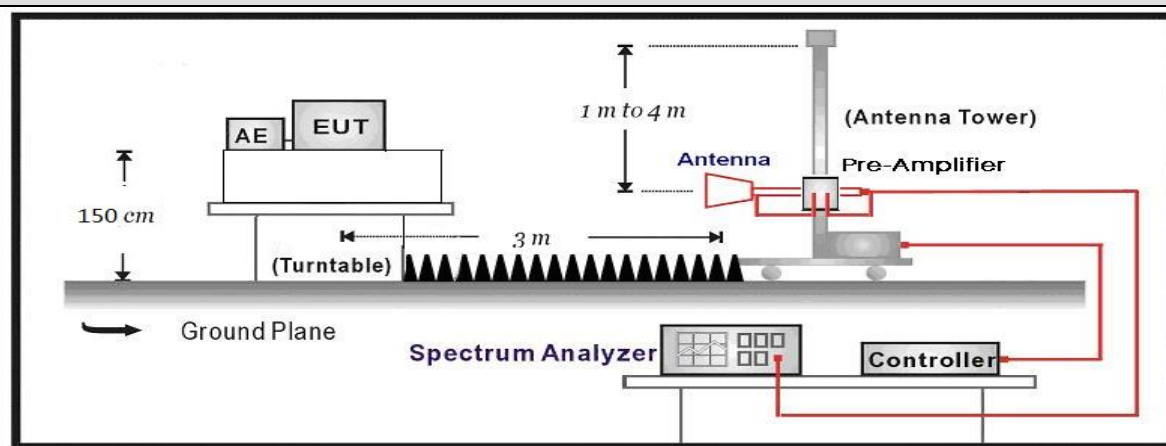


4.2.3 Test Procedure

	References Rule		Chapter	Description
☒	ANSI C63.10		11.12	Emissions in restricted frequency bands
	☒	ANSI C63.10	11.12.1	Radiated emission measurements
	☒	ANSI C63.10	11.12.2.7	Radiated spurious emission test
		☒ ANSI C63.10	6.4	Radiated emissions from unlicensed wireless devices below 30 MHz
		☒ ANSI C63.10	6.5	Radiated emissions from unlicensed wireless devices in the frequency range of 30 MHz to 1000 MHz
		☒ ANSI C63.10	6.6	Radiated emissions from unlicensed wireless devices above 1 GHz


4.2.4 Test Data

Profile: 21C0559R	Page No.: 43
Engineer: Juliuszhou	
Site: AC5	Time: 2022/01/25 - 19:53
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: 8675I	Power: battery 3.85V
Note: Mode 1:Transmit at 2402MHz by ble	

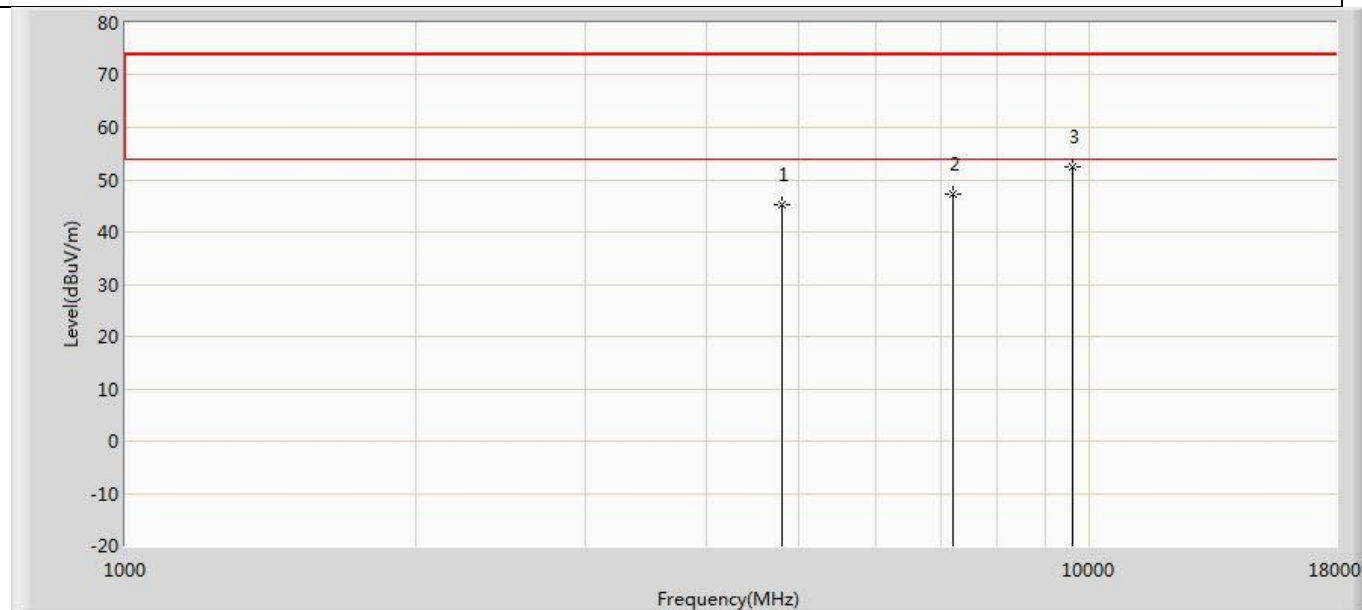


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4804.000	45.077	35.437	-28.923	74.000	9.640	PK
2		7206.000	47.225	35.025	-26.775	74.000	12.200	PK
3	*	9610.500	52.345	35.588	-21.655	74.000	16.757	PK

Profile: 21C0559R	Page No.: 44
Engineer: Juliuszhou	
Site: AC5	Time: 2022/01/25 - 19:53
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: 8675I	Power: battery 3.85V
Note: Mode 1:Transmit at 2402MHz by ble	

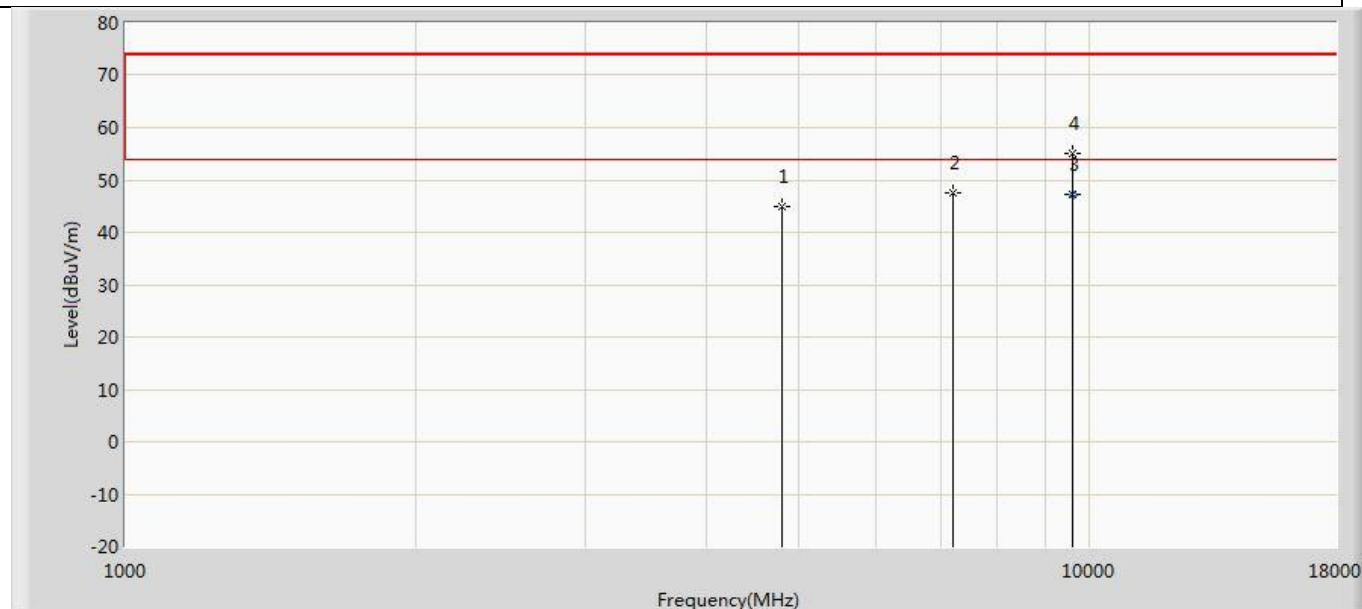


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4804.000	45.025	35.385	-28.975	74.000	9.640	PK
2		7206.000	47.631	35.431	-26.369	74.000	12.200	PK
3		9610.500	55.145	38.388	-18.855	74.000	16.757	PK
4	*	9608.000	47.190	30.393	-6.810	54.000	16.797	AV

Profile: 21C0559R	Page No.: 45
Engineer: Juliuszhou	
Site: AC5	Time: 2022/01/25 - 19:53
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: 8675I	Power: battery 3.85V
Note: Mode 1:Transmit at 2440MHz by ble	

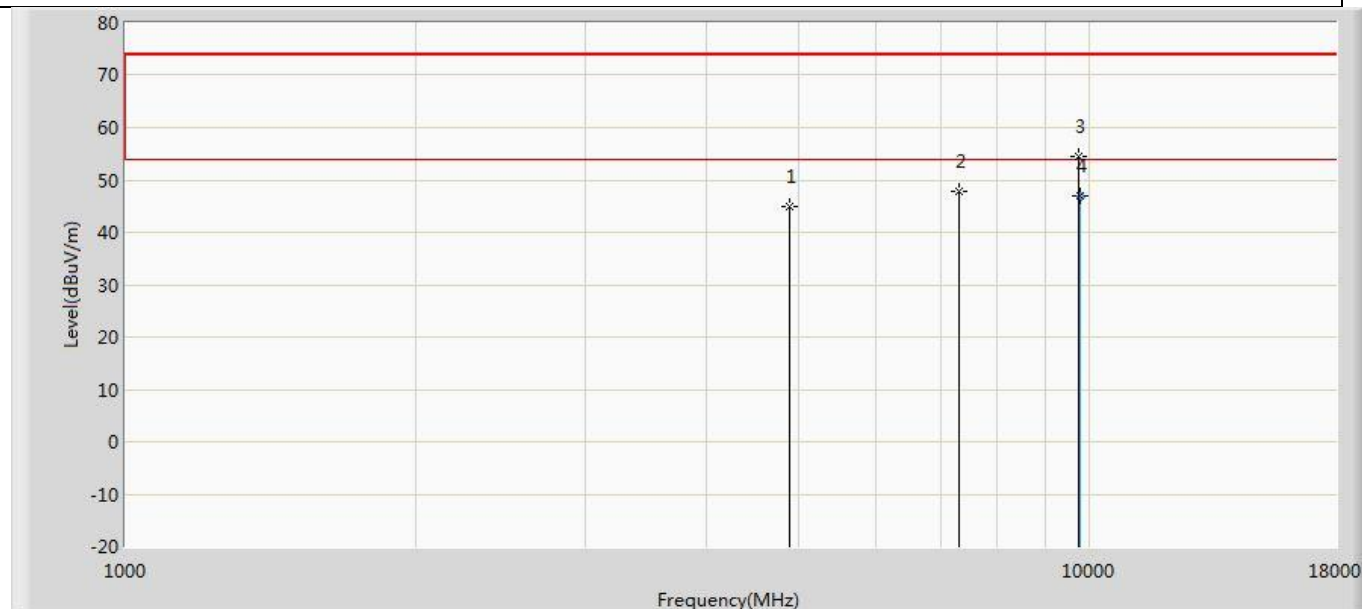


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4880.000	45.015	35.140	-28.985	74.000	9.875	PK
2		7320.000	47.734	34.995	-26.266	74.000	12.739	PK
3		9755.000	54.499	38.778	-19.501	74.000	15.721	PK
4	*	9760.000	47.092	31.416	-6.908	54.000	15.676	AV

Profile: 21C0559R	Page No.: 46
Engineer: Juliuszhou	
Site: AC5	Time: 2022/01/25 - 19:53
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: 8675I	Power: battery 3.85V
Note: Mode 1:Transmit at 2440MHz by ble	

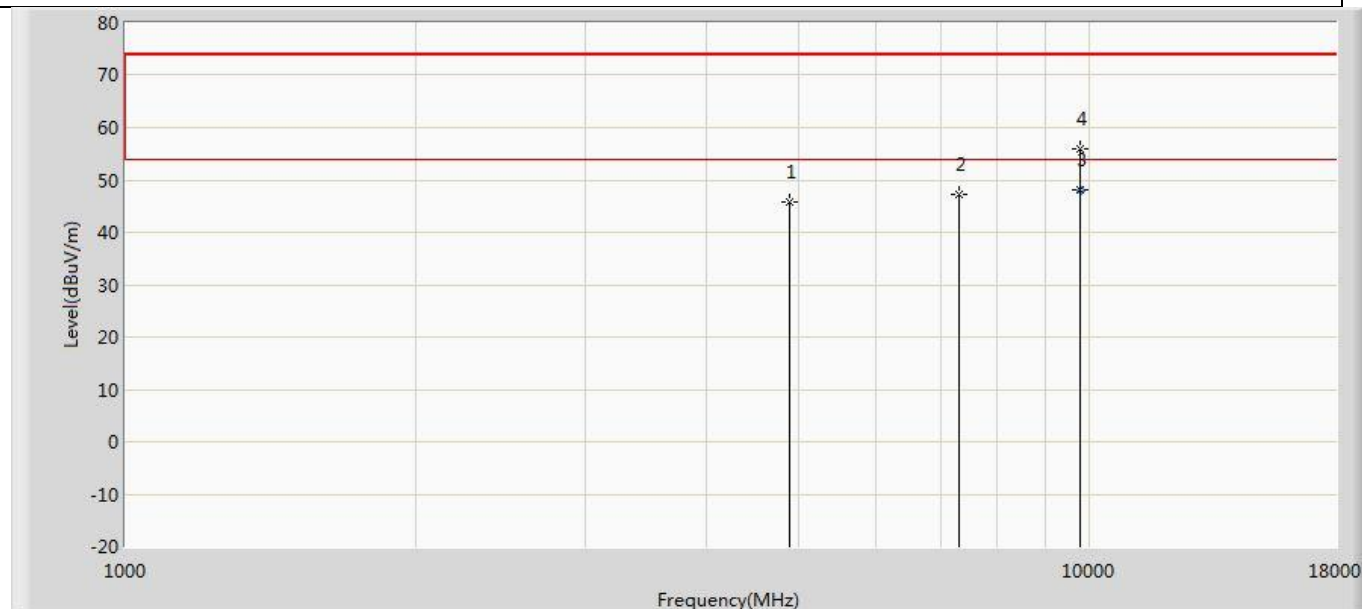


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4880.000	45.703	35.828	-28.297	74.000	9.875	PK
2		7320.000	47.343	34.604	-26.657	74.000	12.739	PK
3		9763.500	55.937	40.292	-18.063	74.000	15.645	PK
4	*	9760.000	48.210	32.534	-5.790	54.000	15.676	AV

Profile: 21C0559R	Page No.: 47
Engineer: Juliuszhou	
Site: AC5	Time: 2022/01/25 - 19:53
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: 8675I	Power: battery 3.85V
Note: Mode 1:Transmit at 2480MHz by ble	

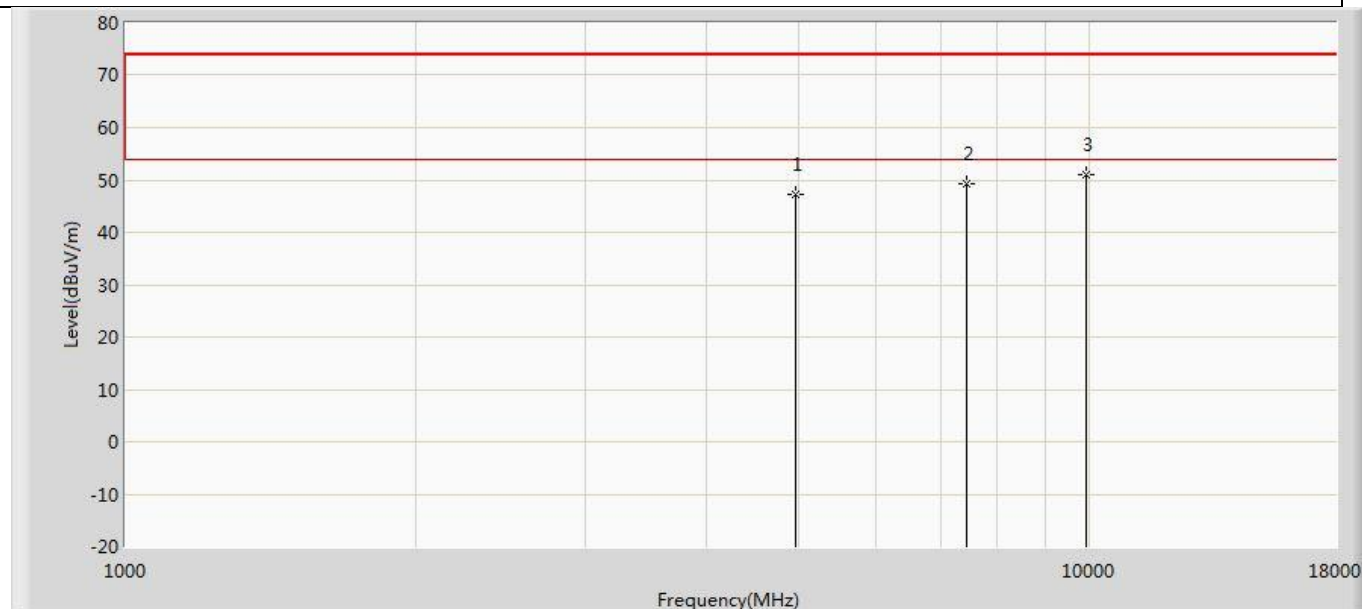

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4961.000	47.372	37.469	-26.628	74.000	9.903	PK
2		7443.000	49.275	37.138	-24.725	74.000	12.137	PK
3	*	9916.500	51.011	34.908	-22.989	74.000	16.103	PK

Profile: 21C0559R	Page No.: 48
Engineer: Juliuszhou	
Site: AC5	Time: 2022/01/25 - 19:53
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: 8675I	Power: battery 3.85V
Note: Mode 1:Transmit at 2480MHz by ble	

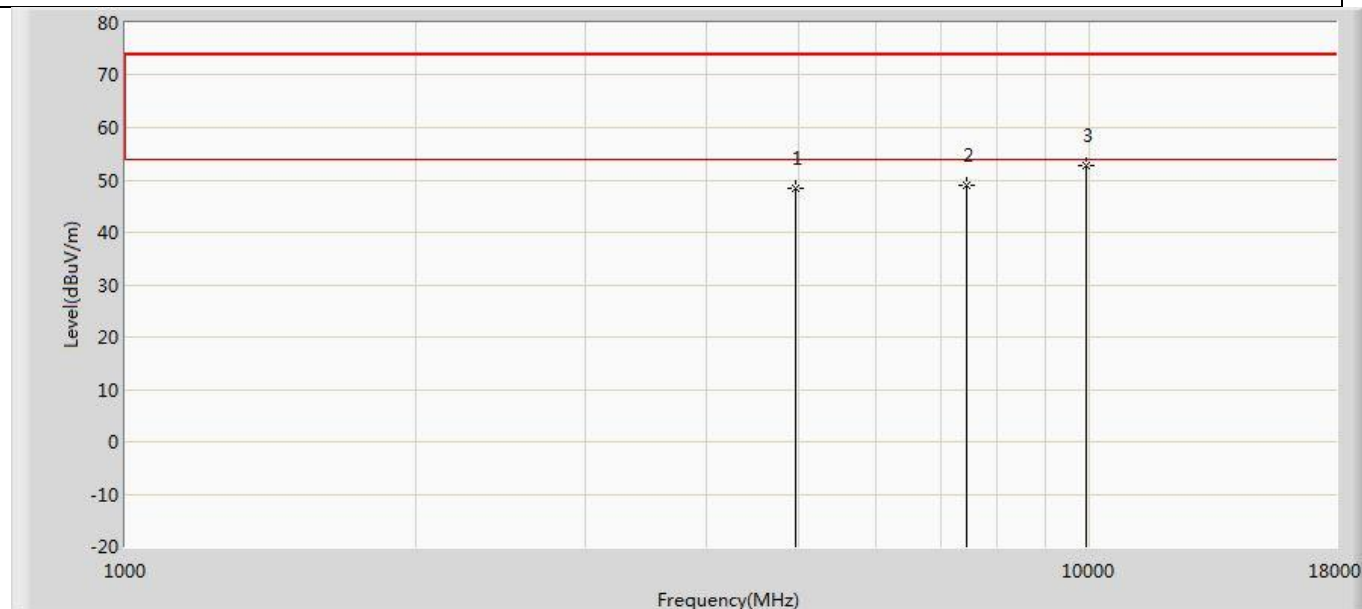


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4961.000	48.383	38.480	-25.617	74.000	9.903	PK
2		7443.000	49.102	36.965	-24.898	74.000	12.137	PK
3	*	9916.500	52.644	36.541	-21.356	74.000	16.103	PK

Note:

1. Measured Level = Reading Level + Factor.
2. The test frequency range, 9kHz~30MHz, 18GHz~26GHz, both of the worst case are at least 20dB below the limits, therefore no data appear in the report.
3. This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.
4. As the radiated emission was performed, so conducted emission was not tested.
5. Mark 3 is 3th harmonic in non-restricted band, the limit is follow part 15C § 15.209.

The worst case of Radiated Emission below 1GHz:

Profile: 21C0559R	Page No.: 33
Engineer: Carlos shen	
Site: AC2	Time: 2022/01/25 - 03:53
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: AC2_3M(30-1000M)	Polarity: Horizontal
EUT: 8675i	Power: battery 3.85V
Note: Model1	

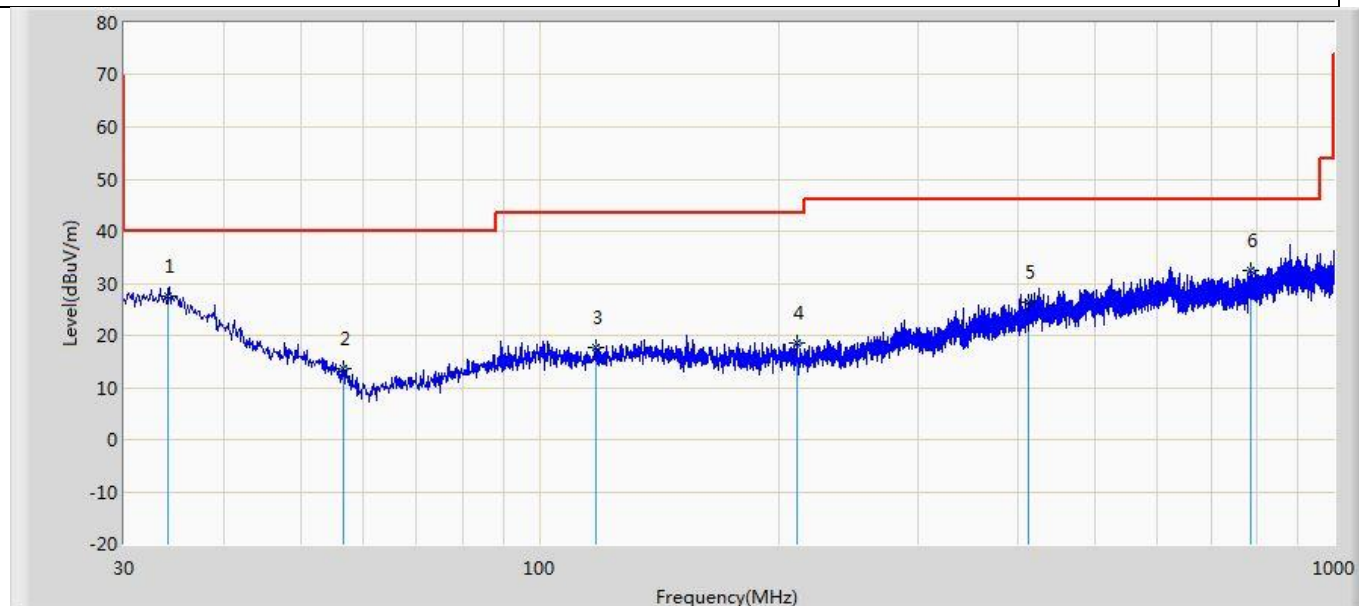


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	34.123	27.659	0.631	-12.341	40.000	27.028	QP
2		56.675	13.689	1.752	-26.311	40.000	11.937	QP
3		117.543	17.715	1.186	-25.785	43.500	16.529	QP
4		210.541	18.578	1.687	-24.922	43.500	16.891	QP
5		413.271	26.410	0.356	-19.590	46.000	26.054	QP
6		787.449	32.410	1.954	-13.590	46.000	30.457	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Factor(Probe+Cable-Amp)

Profile: 21C0559R	Page No.: 34
Engineer: Carlos shen	
Site: AC2	Time: 2022/01/25 - 03:55
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: AC2_3M(30-1000M)	Polarity: Vertical
EUT: 8675i	Power: battery 3.85V
Note: Model1	

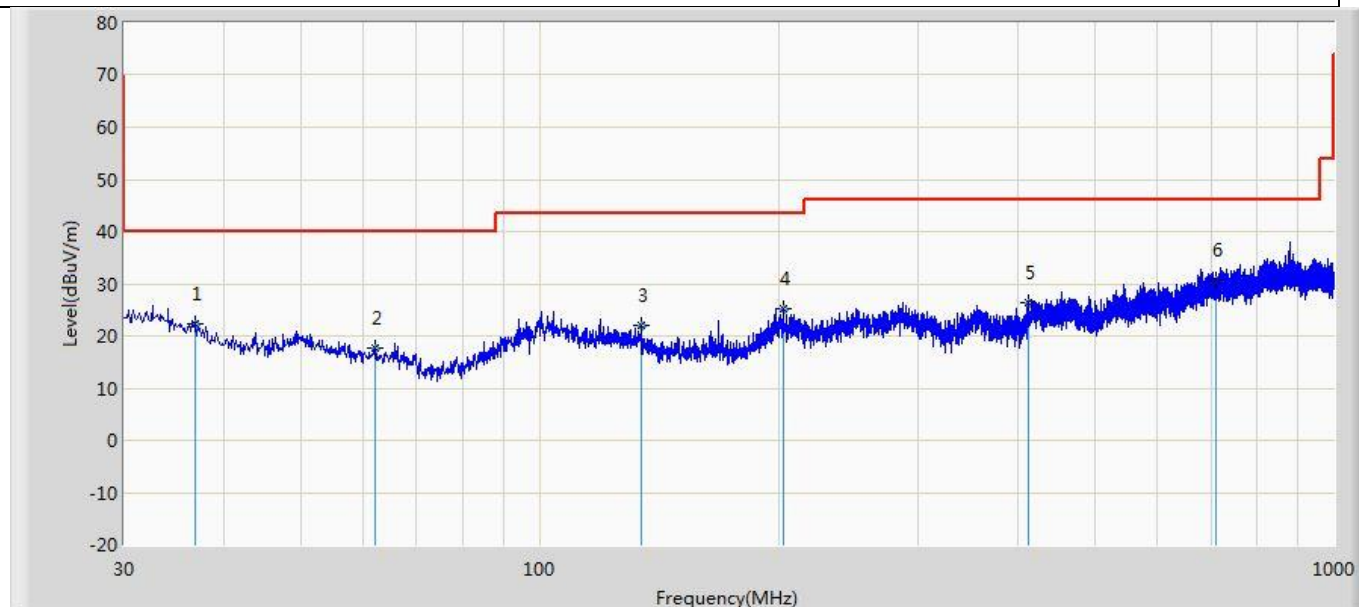

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		36.911	22.415	1.210	-17.585	40.000	21.205	QP
2		62.131	17.704	1.644	-22.296	40.000	16.060	QP
3		134.154	21.948	2.176	-21.552	43.500	19.773	QP
4		202.660	25.154	1.729	-18.346	43.500	23.425	QP
5		411.937	26.514	1.359	-19.486	46.000	25.156	QP
6	*	709.727	30.758	0.493	-15.242	46.000	30.265	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Factor(Probe+Cable-Amp)

4.3 Emissions in non-restricted frequency band

VERDICT: PASS


4.3.1 Limit

Standard	FCC Part 15 Subpart C Paragraph 15.247(d)
RF Output power (Detection methods)	Limit(dB)
RF Output power(Average detector)	30dBc(Note1)
RF Output power(PK detector)	20dBc(Note2)

Note 1: If maximum conducted (average) output power was used to demonstrate compliance as described in 9.2, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 30 dBc).

Note 2: If the maximum peak conducted output power procedure was used, then the peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 20 dBc).

4.3.2 Test Setup

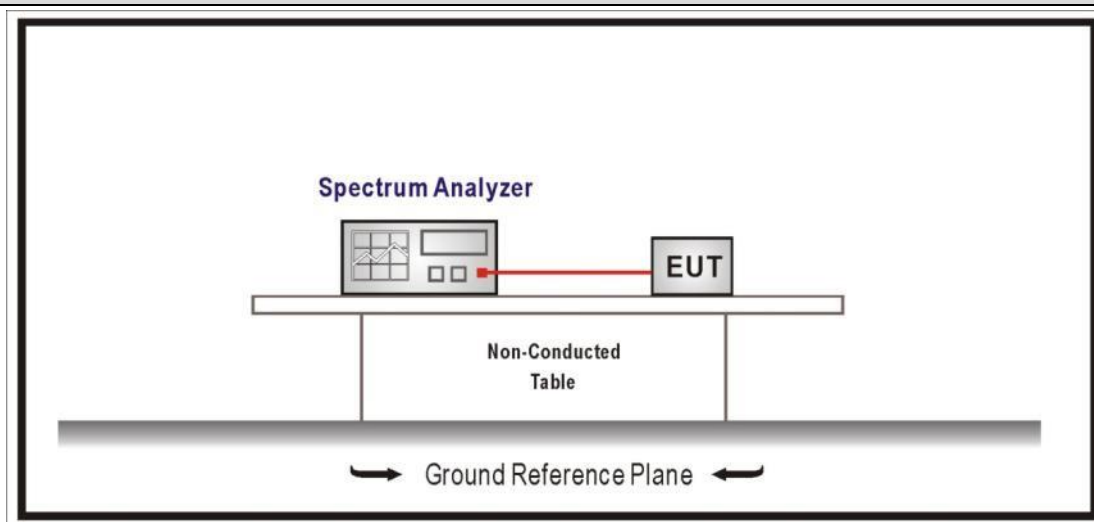


4.3.3 Test Procedure


References Rule	Chapter	Description
☒ ANSI C63.10	11.11	Emissions in non-restricted frequency bands
☒ ANSI C63.10	11.11.1	General
☒ ANSI C63.10	11.11.2	Reference level measurement
☒ ANSI C63.10	11.11.3	Emission level measurement

4.3.4 Test Data


Mode 1 CH00 (2402MHz)

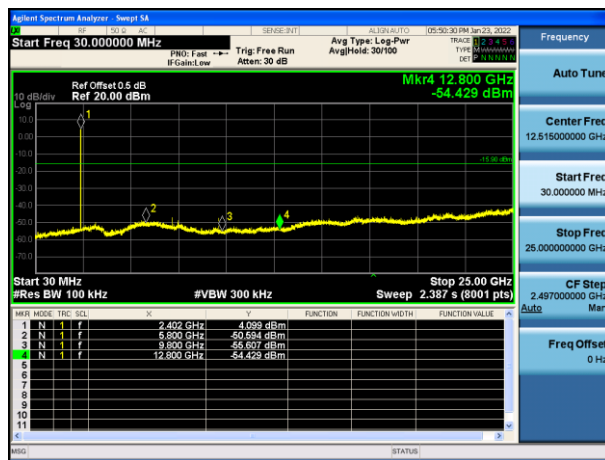


Mode 1 CH00(2402MHz)

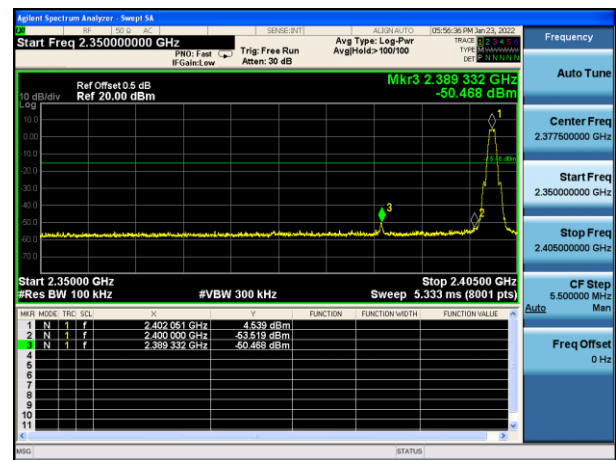


Mode 1 CH19 (2440MHz)

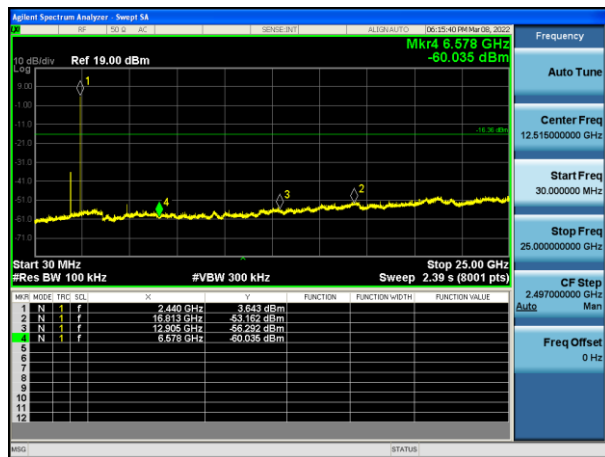


Mode 1 CH19(2440MHz)

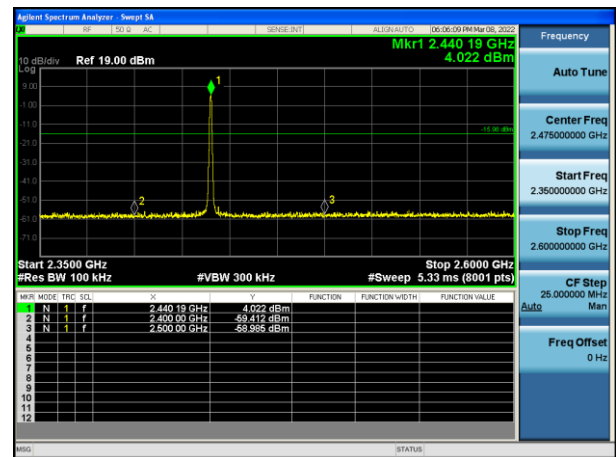

Mode 1 CH39 (2480MHz)

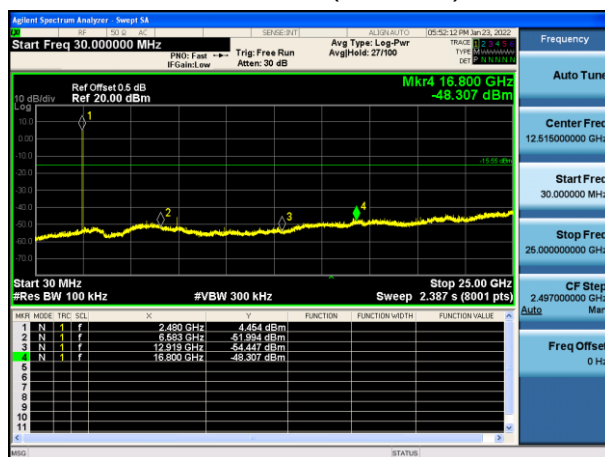


Mode 1 CH39(2480MHz)

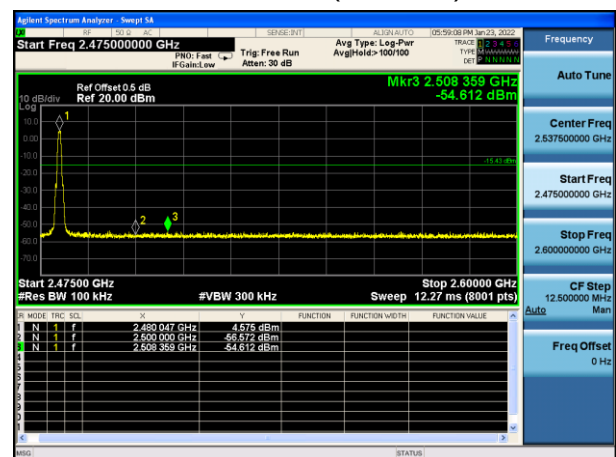

4.4 Duty cycle**VERDICT: PASS****4.4.1 Limit**

N/A

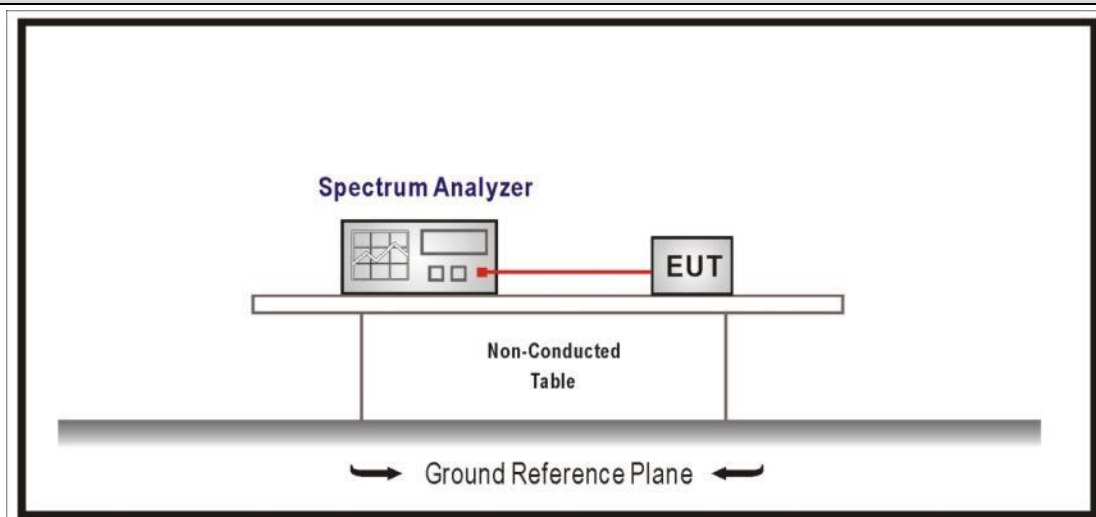4.4.2 Test Setup**4.4.3 Test Procedure**

References Rule		Chapter	Description
☒	ANSI C63.10	11.6	Duty cycle (D), transmission duration (T), and maximum power control level


4.4.4 Test Data

Test Mode	Tx On (us)	Tx Off (us)	VBW (kHz)	Tx On + Tx Off (us)	Duty Cycle (%)
Mode 1	-	-	10	-	100
Mode 2	-	-	10	-	100

Note 1: T means the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

Note 2: According to KDB 558074, when test for Radiated Emission Band Edge and Radiated Emission, for average detector set: $VBW \geq 1/T$ will be used.

Mode 1 CH19 2440MHz

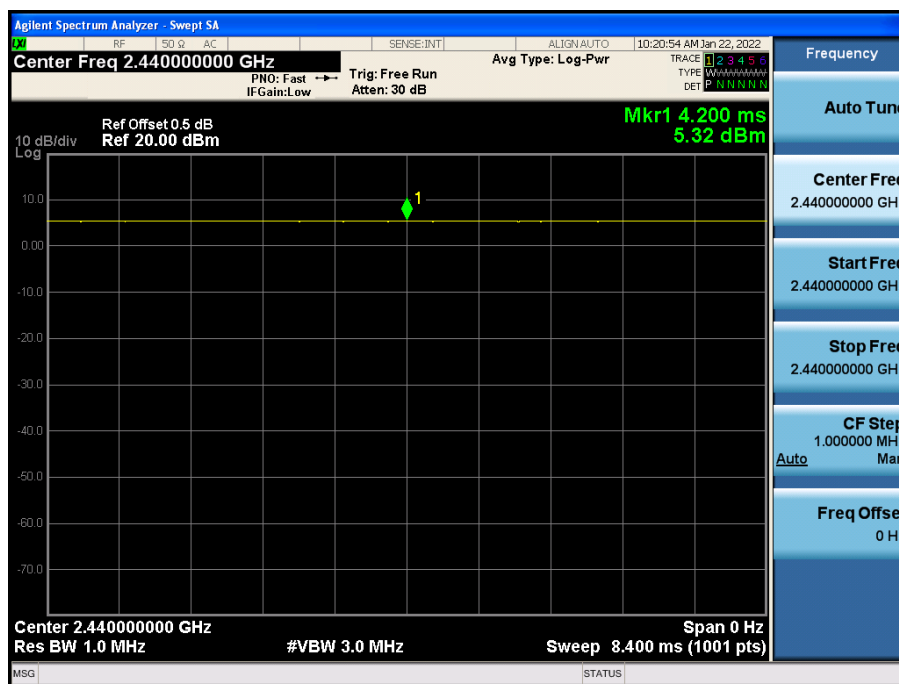

4.5 Band Edge


VERDICT: PASS

4.5.1 Limit

Standard		FCC Part 15 Subpart C Paragraph 15.247(d) ,15.209		
Frequency bands (MHz)	Detector	Limit (dB μ V/m)	RBW (MHz)	Distance (m)
2310-2390	PK	74	1	3
2483.5-2500	AV	54	1	3

Note: The field strength of emissions appearing within these frequency bands shall not exceed the limits.

4.5.2 Test Setup

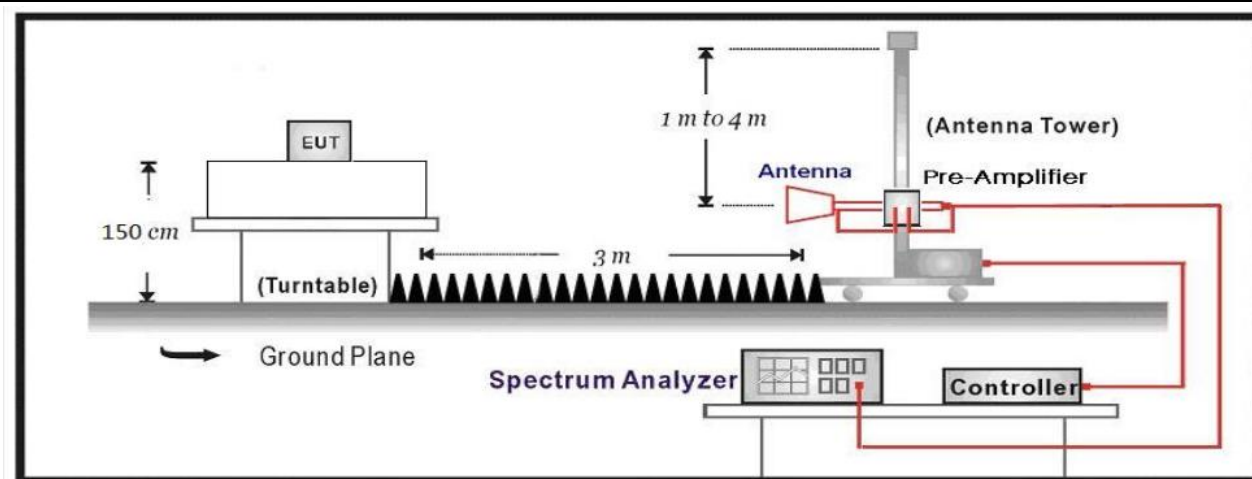


4.5.3 Test Procedure

	References Rule	Chapter	Description
☒	ANSI C63.10	6.10	Band-edge testing
☒	☒ ANSI C63.10	6.10.5	Restricted-band band-edge measurements
☐	☐ ANSI C63.10	6.10.6	Marker-delta method
☒	ANSI C63.10	11.12	Emissions in restricted frequency bands
☒	☒ ANSI C63.10	11.12.2	Antenna-port conducted measurements
☐	☐ ANSI C63.10	11.12.2.3	Quasi-peak measurement procedure
☒	☒ ANSI C63.10	11.12.2.4	Peak power measurement procedure
☒	☒ ANSI C63.10	11.12.2.5	Average power measurement procedures


4.5.4 Test Data

Profile: 21C0559R	Page No.: 25
Engineer: Carlosshen	
Site: AC5	Time: 2022/01/24 - 22:31
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: 8675I	Power: battery 3.85V
Note: Mode 1:Transmit at 2402MHz by ble	

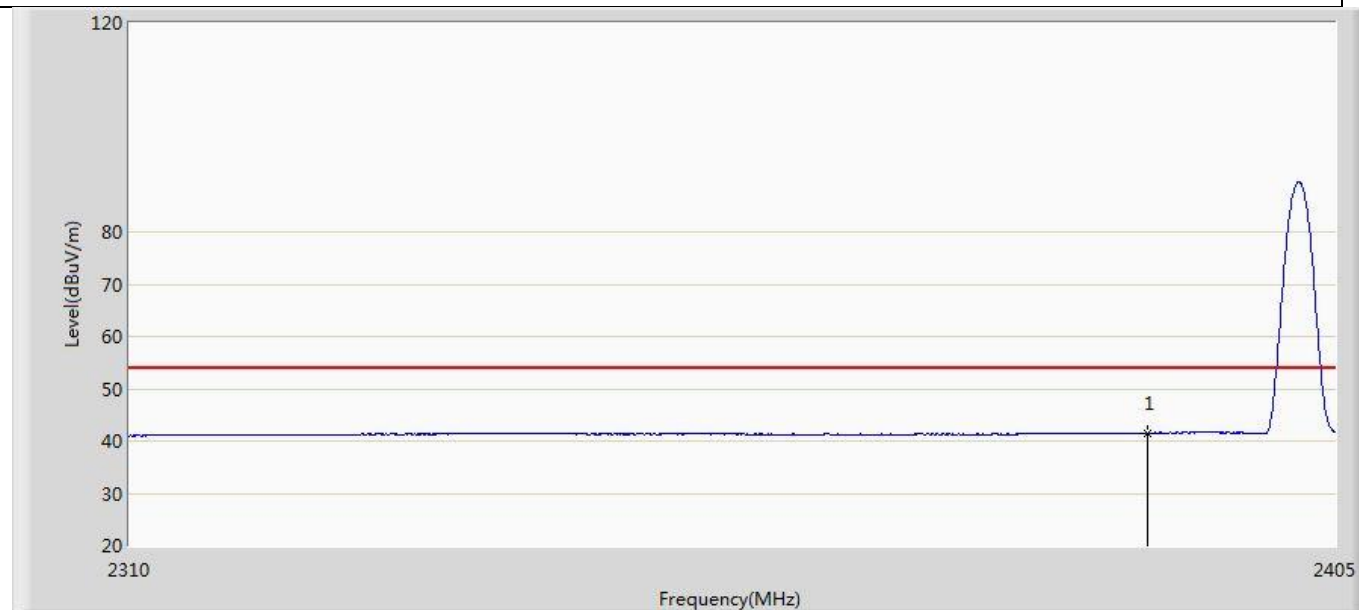


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	41.560	3.255	-12.440	54.000	38.305	AV

Profile: 21C0559R	Page No.: 26
Engineer: Carlosshen	
Site: AC5	Time: 2022/01/24 - 23:02
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: 8675I	Power: battery 3.85V
Note: Mode 1:Transmit at 2402MHz by ble	

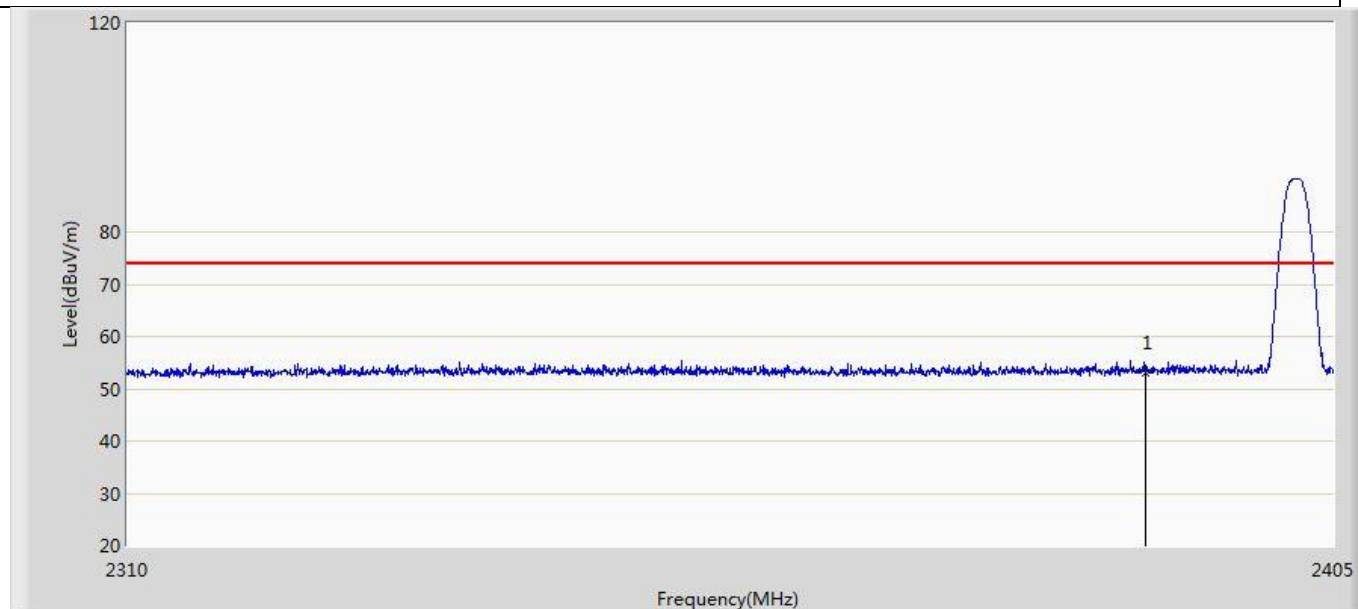


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	53.023	14.718	-20.977	74.000	38.305	PK

Profile: 21C0559R	Page No.: 27
Engineer: Carlosshen	
Site: AC5	Time: 2022/01/24 - 23:03
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: 8675I	Power: battery 3.85V
Note: Mode 1:Transmit at 2402MHz by ble	

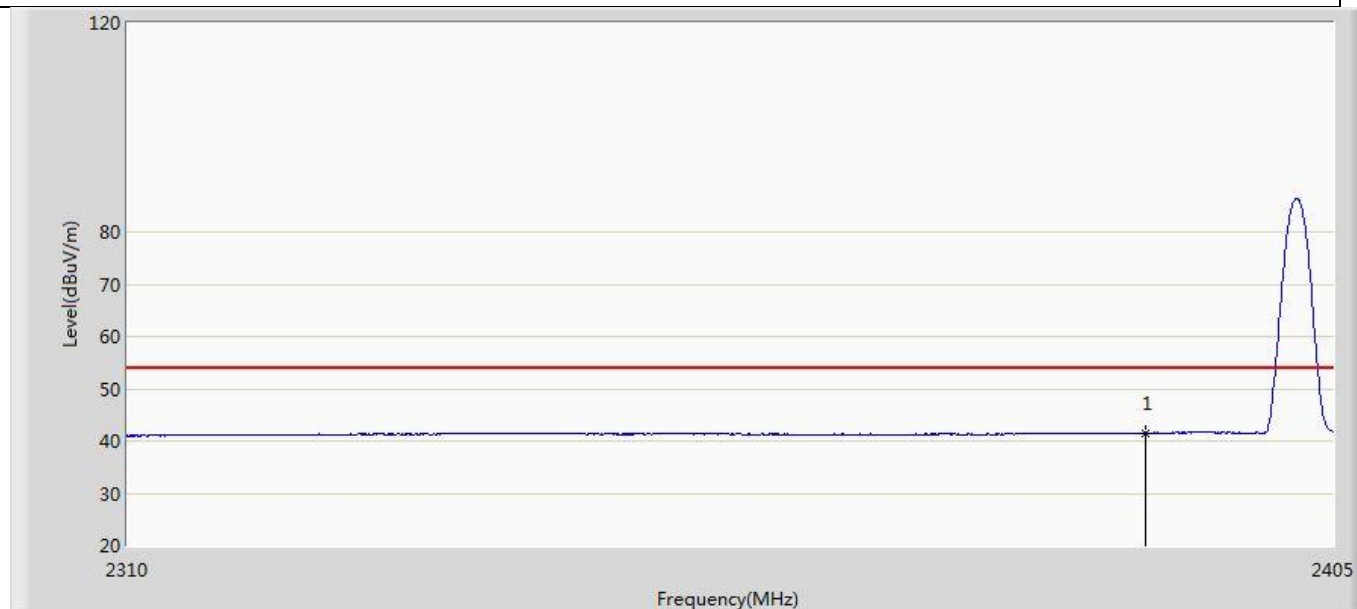


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	41.593	3.288	-12.407	54.000	38.305	AV

Profile: 21C0559R	Page No.: 28
Engineer: Carlosshen	
Site: AC5	Time: 2022/01/24 - 23:04
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: 8675I	Power: battery 3.85V
Note: Mode 1:Transmit at 2402MHz by ble	

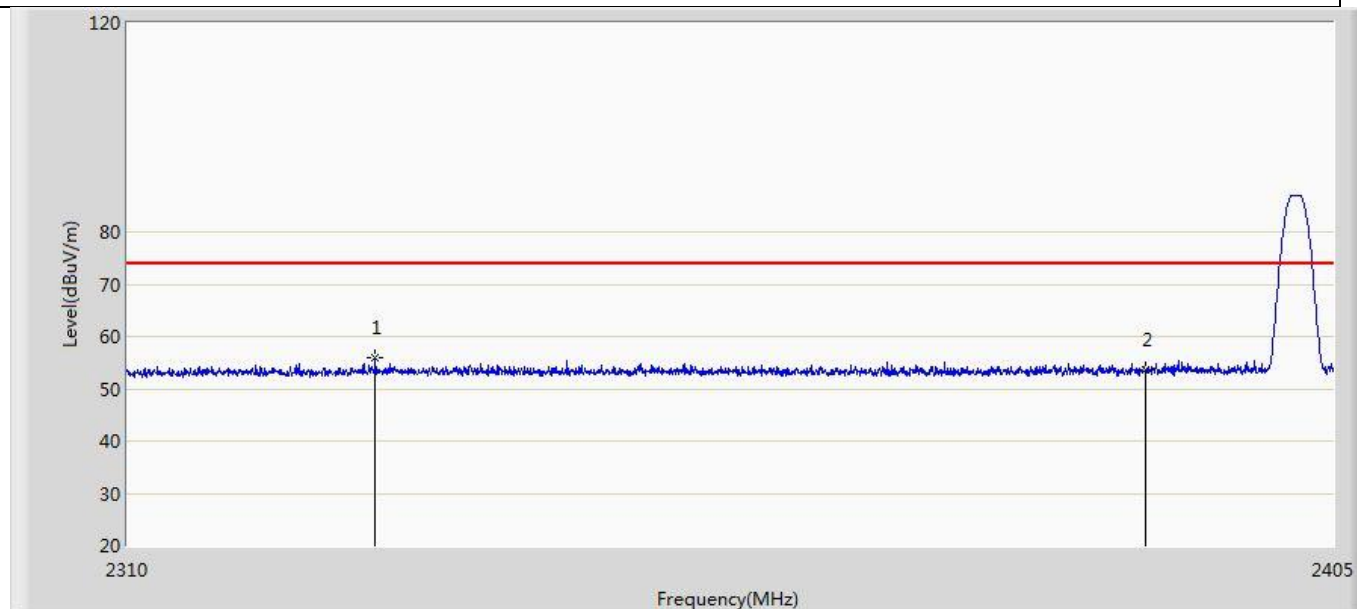


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2329.238	55.921	17.834	-18.079	74.000	38.087	PK
2		2390.000	53.670	15.365	-20.330	74.000	38.305	PK

Profile: 21C0559R	Page No.: 29
Engineer: Carlosshen	
Site: AC5	Time: 2022/01/24 - 20:34
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: 8675I	Power: battery 3.85V
Note: Mode 1:Transmit at 2480MHz by ble	

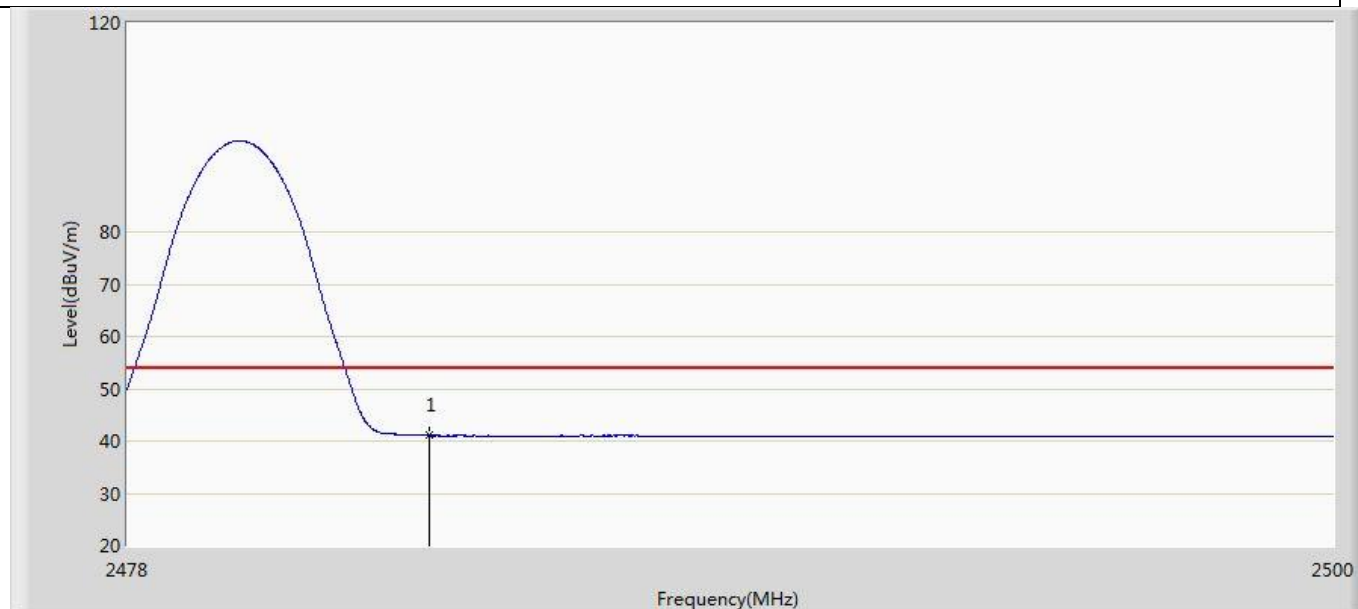


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	41.073	2.619	-12.927	54.000	38.453	AV

Profile: 21C0559R	Page No.: 30
Engineer: Carlosshen	
Site: AC5	Time: 2022/01/24 - 20:37
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: 8675I	Power: battery 3.85V
Note: Mode 1:Transmit at 2480MHz by ble	

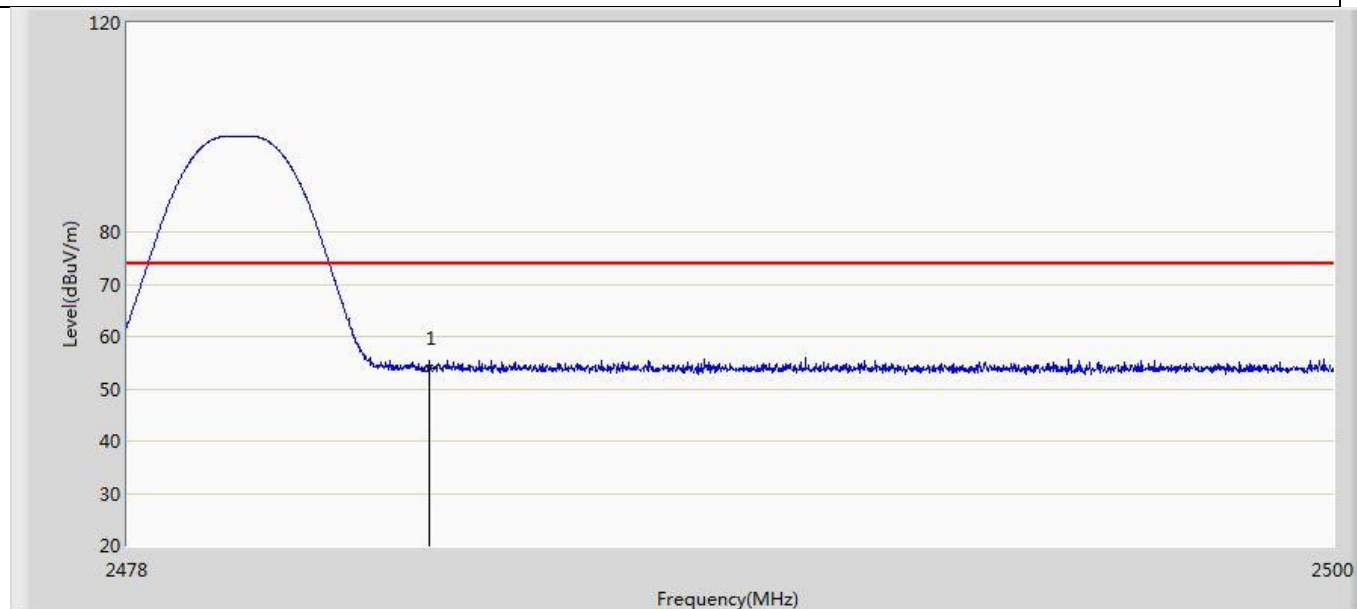


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	53.866	15.412	-20.134	74.000	38.453	PK

Profile: 21C0559R	Page No.: 31
Engineer: Carlosshen	
Site: AC5	Time: 2022/01/24 - 20:38
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: 8675I	Power: battery 3.85V
Note: Mode 1:Transmit at 2480MHz by ble	

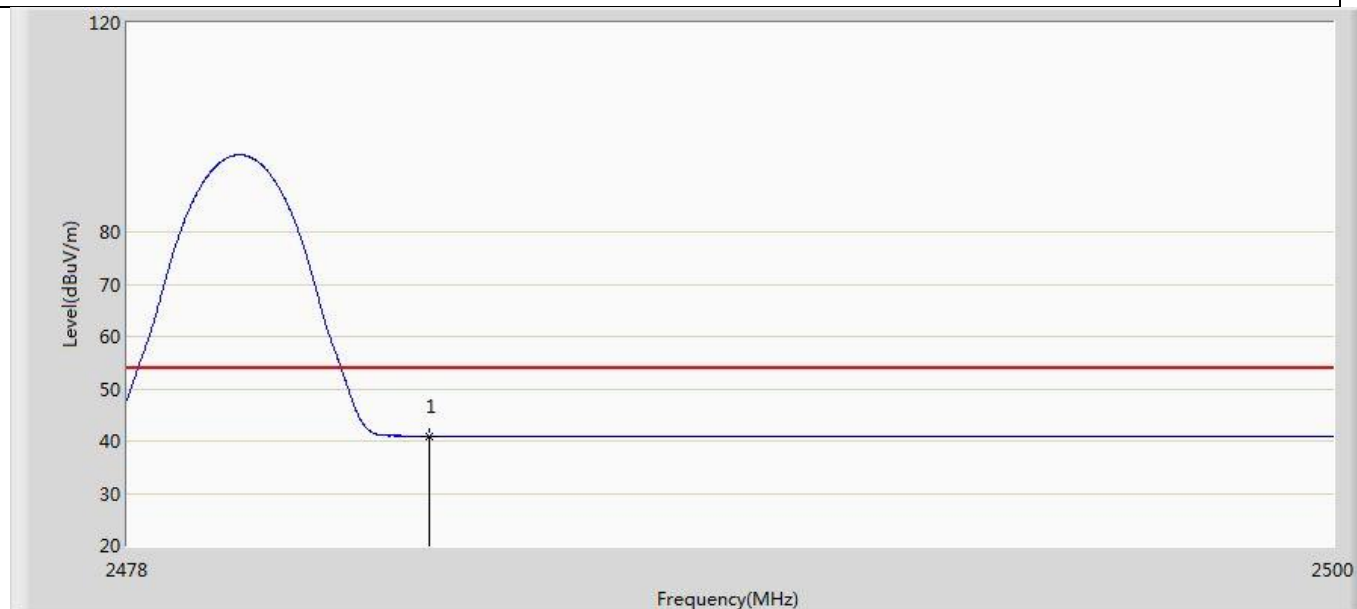

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	40.918	2.464	-13.082	54.000	38.453	AV

Profile: 21C0559R 边带-ble	Page No.: 32
Engineer: Carlosshen	
Site: AC5	Time: 2022/01/24 - 20:39
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: 8675I	Power: battery 3.85V
Note: Mode 1:Transmit at 2480MHz by ble	

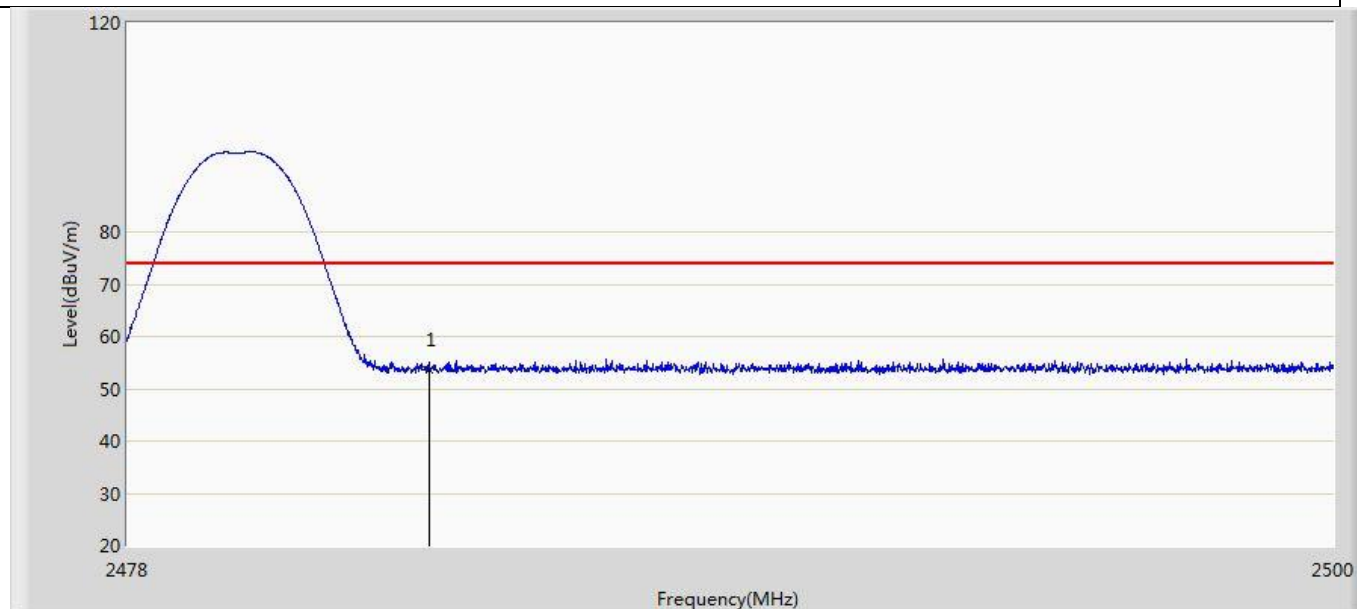


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	53.529	15.075	-20.471	74.000	38.453	PK

4.6 DTS Bandwidth**VERDICT: PASS****4.6.1 Limit****Standard**

FCC Part 15 Subpart C Paragraph 15.247 (a)(2)

Systems using digital modulation techniques operate in the 2400-2483.5 MHz. The minimum 6 dB bandwidth shall be at least 500 kHz

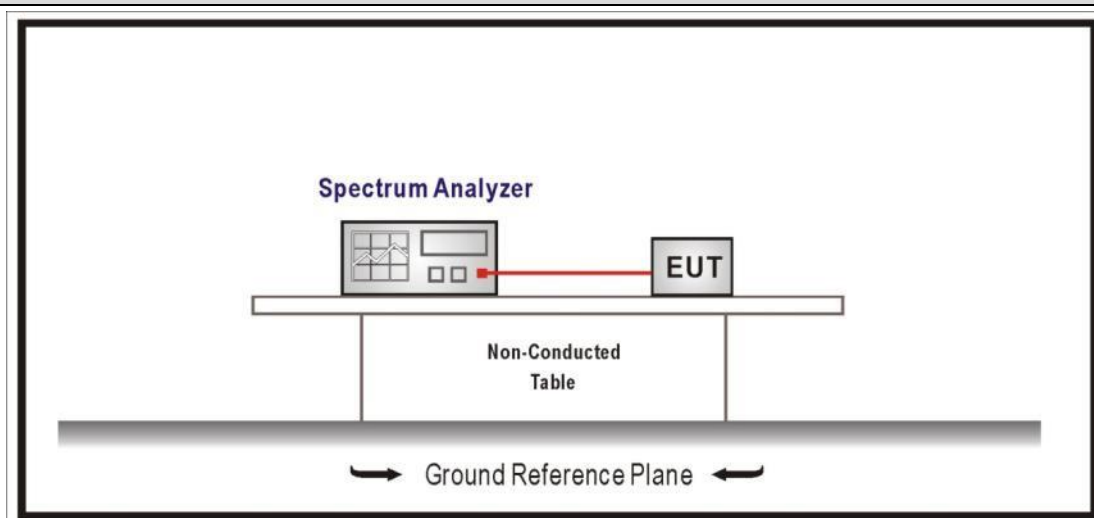4.6.2 Test Setup**4.6.3 Test Procedure**

	Reference Rule	Chapter	Description
☒	ANSI C63.10	11.8	DTS bandwidth
☐	ANSI C63.10	11.8.1	Option 1
☒	ANSI C63.10	11.8.2	Option 2

4.6.4 Test Data

Mode	CH.	Test Freq. (MHz)	99% Occupied Bandwidth (kHz)	6dB Occupied Bandwidth (kHz)	Limit (kHz)	Result
1	00	2402	1057.1	699.9	>500	Pass
	19	2440	1061.0	717.2	>500	Pass
	39	2480	1055.8	712.4	>500	Pass

Note : The worst case of Occupied Bandwidth as below:


99% Occupied Bandwidth

Mode 1 CH00 (2402MHz)



6dB Occupied Bandwidth


Mode 1 CH19(2440MHz)

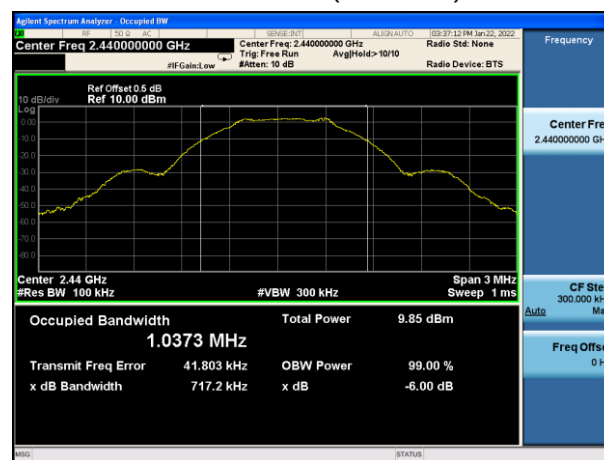

4.7 Fundamental emission output power**VERDICT: PASS****4.7.1 Limit**

Standard		FCC Part 15 Subpart C Paragraph 15.247 (b)(3)
☒	GTX < 6dBi	Pout ≤ 30dBm
☐	GTX > 6dBi	
☐	Non-Fix point-point	Pout ≤ 30 - (GTX - 6)
☐	Fix point-point	Pout ≤ 30 - [(GTX - 6)]/3
☐	Point-to-multipoint	Pout ≤ 30 - (GTX - 6)
☐	Overlap Beams	Pout ≤ 30 - [(GTX - 6)]/3
☐	Aggregate power transmitted simultaneously on all beams	Pout ≤ 30 - [(GTX - 6)]/3
☐	single directional beam	Pout ≤ 30 - [(GTX - 6)]/3 + 8dB

Note 1 : GTX directional gain of transmitting antennas.
Note 2 : Pout is maximum peak conducted output power .

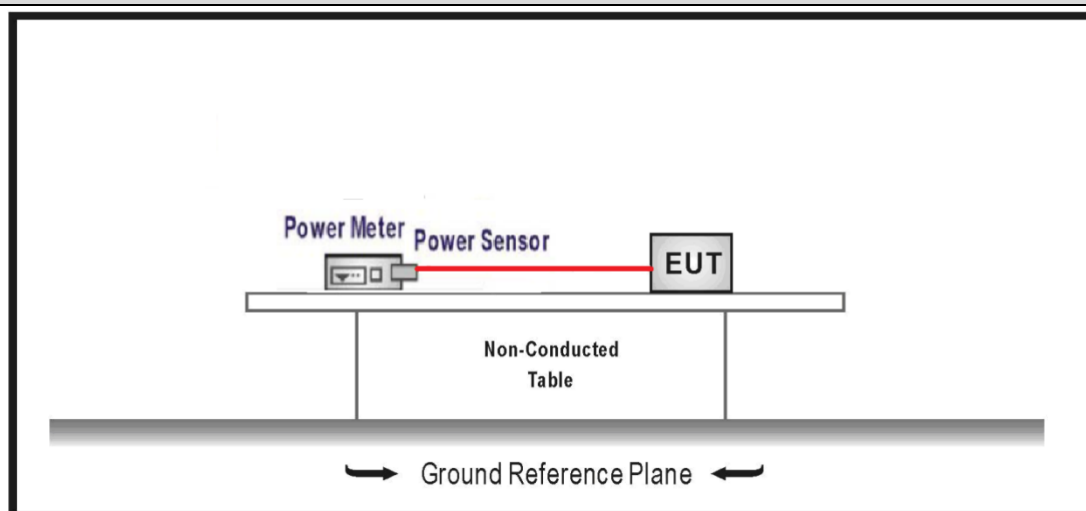4.7.2 Test Setup

4.7.3 Test Procedure

	References Rule		Chapter	Description
☒	ANSI C63.10		11.9	Fundamental emission output power
	☒	ANSI C63.10		11.9.1 Maximum peak conducted output power
	☐	☐	ANSI C63.10	11.9.1.1 RBW $\geq$ DTS bandwidth
		☐	ANSI C63.10	11.9.1.2 Integrated band power method
		☒	ANSI C63.10	11.9.1.3 PKPM1 Peak power meter method
	☐	ANSI C63.10		11.9.2 Maximum conducted (average) output power
	☐	☐	ANSI C63.10	11.9.2.2 Measurement using a spectrum analyzer (SA)
		☐	ANSI C63.10	11.9.2.2.2 Method AVGSA-1(Duty cycle $\geq 98\%$)
		☐	ANSI C63.10	11.9.2.2.3 Method AVGSA-1A(Duty cycle $\geq 98\%$)
		☐	ANSI C63.10	11.9.2.2.4 Method AVGSA-2(Duty cycle $\leq 98\%$)
		☐	ANSI C63.10	11.9.2.2.5 Method AVGSA-2A(Duty cycle $\leq 98\%$)
		☐	ANSI C63.10	11.9.2.2.4 Method AVGSA-3
		☐	ANSI C63.10	11.9.2.2.5 Method AVGSA-3A
		☐	ANSI C63.10	11.9.2.3 Measurement using a power meter (PM)
		☐	ANSI C63.10	11.9.2.3.1 Method AVGPM
		☐	ANSI C63.10	11.9.2.3.2 Method AVGPM-G

4.7.4 Test Data

Mode	Channel	Test Frequency (MHz)	Conducted Power (dBm)	EIRP (dBm)	Conducted Power Limit (dBm)	EIRP Limit (dBm)	Result
Mode 1	00	2402	5.36	6.18	≤30	≤36	Pass
	19	2440	5.41	6.23	≤30	≤36	Pass
	39	2480	5.47	6.29	≤30	≤36	Pass

4.8 Power Density


VERDICT: PASS

4.8.1 Limit:

Standard	FCC Part 15 Subpart C Paragraph 15.247 (b)(3)
-----------------	---

Power Spectral Density $\leq 8\text{dBm}/3\text{kHz}$

4.8.2 Test Setup

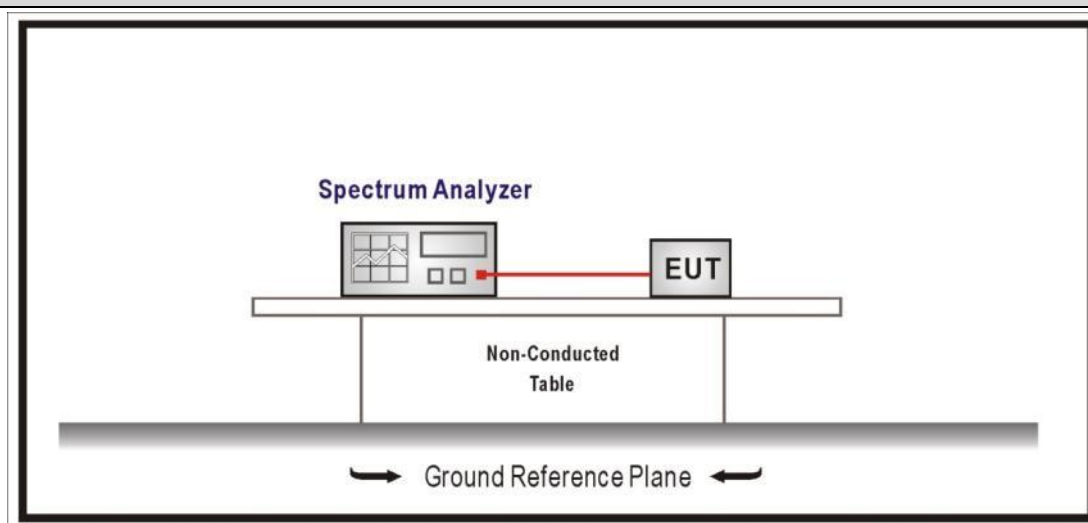

4.8.3 Test Procedure


	References Rule		Chapter	Description
☒	ANSI C63.10		11.10	Maximum power spectral density level in the fundamental emission
	☒	ANSI C63.10	11.10.2	Method PKPSD (peak PSD)
	☐	ANSI C63.10	11.10.3	Method AVGPSD-1(Duty cycle $\geq 98\%$)
	☐	ANSI C63.10	11.10.4	Method AVGPSD-1A(Duty cycle $\geq 98\%$)
	☐	ANSI C63.10	11.10.5	Method AVGPSD-2(Duty cycle $< 98\%$)
	☐	ANSI C63.10	11.10.6	Method AVGPSD-2A(Duty cycle $< 98\%$)
	☐	ANSI C63.10	11.10.7	Method AVGPSD-3
	☐	ANSI C63.10	11.10.8	Method AVGPSD-3A

4.8.4 Test Data

Mode	Channel	Test Frequency (MHz)	Measurement PSD (dBm/3kHz)	Limit (dBm/3kHz)	Result
Mode 1	00	2402	-12.669	≤8	Pass
	19	2440	-12.580	≤8	Pass
	39	2480	-12.215	≤8	Pass

Note : The worst case of PSD as below:

Mode 1 CH39(2480MHz)

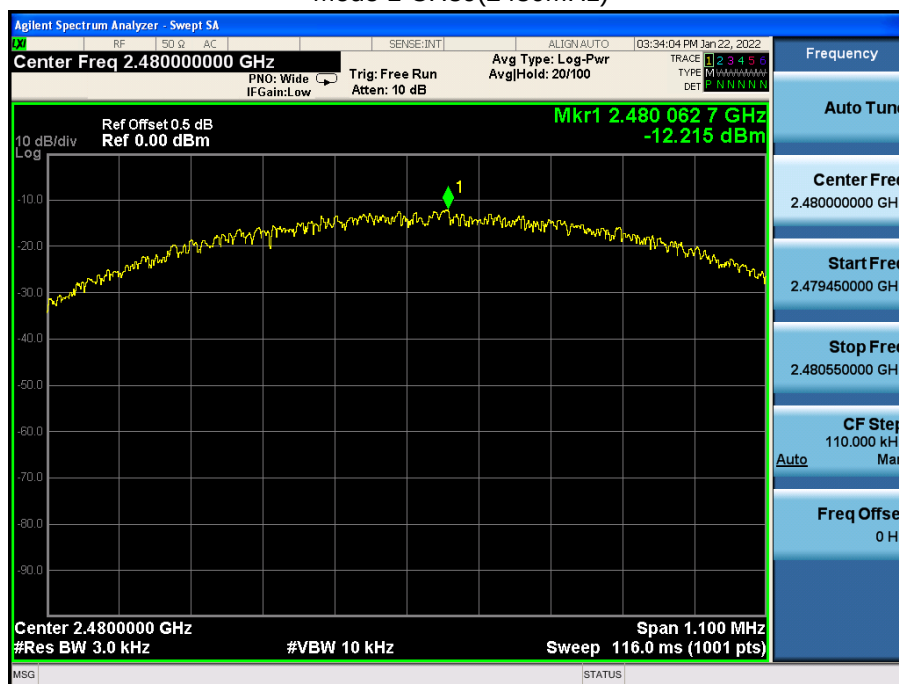

4.9 Antenna Requirement**VERDICT: PASS****4.9.1 Limit:****Standard**

FCC Part 15 Subpart C Paragraph 15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

4.9.2 Antenna Connector Construction:

- | | |
|-------------------------------------|--|
| ☒ | The use of a permanently attached antenna |
| ☐ | The antenna use of a unique coupling to the intentional radiator |
| ☐ | The use of a nonstandard antenna jack or electrical connector |

Please refer to the attached document "Internal Photograph" to show the antenna connector.

5 TEST SETUP PHOTO AND EUT PHOTO

Remark: The test setup photo and EUT Photo please see appendix.

_____ The End _____