

MEASUREMENT REPORT

FCC ID : HD5-CK67X0N

Applicant : Honeywell International Inc.
Honeywell Safety and Productivity Solutions

Application Type : Certification

Product : Mobile Computer

Model No. : CK67X0N

Brand Name : Honeywell

FCC Classification : Unlicensed National Information Infrastructure (NII)

FCC Rule Part(s) : Part15 Subpart E (Section 15.407)

Received Date : May 9, 2024

Test Date : June 21, 2024 ~ July 26, 2024

Test By : Owen Tsai
(Owen Tsai)

Reviewed By : Paddy Chen
(Paddy Chen)

Approved By : Chenz Ker
(Chenz Ker)



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in KDB 789033 D02v02r01. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Taiwan) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
2405TW0107-U5	1.0	Original Report	2024-08-02	

CONTENTS

Description	Page
1. INTRODUCTION	7
1.1. Scope	7
1.2. MRT Test Location	7
2. PRODUCT INFORMATION	8
2.1. Equipment Description.....	8
2.2. Product Specification Subjective to this Report.....	9
2.3. Working Frequencies for this report	10
2.4. Description of Available Antennas.....	11
2.5. Test Mode	12
2.6. Configuration of Test System.....	13
2.7. Test System Details.....	14
2.8. Description of Test Software	14
2.9. Applied Standards	14
2.10. Duty Cycle	15
2.11. Test Configuration	20
2.12. EMI Suppression Device(s)/Modifications.....	20
2.13. Labeling Requirements.....	20
3. DESCRIPTION OF TEST	21
3.1. Evaluation Procedure	21
3.2. AC Line Conducted Emissions	21
3.3. Radiated Emissions.....	22
4. ANTENNA REQUIREMENTS.....	23
5. TEST EQUIPMENT CALIBRATION DATE.....	24
6. MEASUREMENT UNCERTAINTY.....	25
7. TEST RESULT	26
7.1. Summary	26
7.2. 26dB Bandwidth Measurement.....	27
7.2.1. Test Limit	27
7.2.2. Test Procedure used.....	27
7.2.3. Test Setting.....	27
7.2.4. Test Setup	27
7.2.5. Test Result.....	28
7.3. 6dB Bandwidth Measurement.....	53

7.3.1. Test Limit	53
7.3.2. Test Procedure used	53
7.3.3. Test Setting.....	53
7.3.4. Test Setup	53
7.3.5. TestResult.....	54
7.4. Output Power Measurement	63
7.4.1. Test Limit	63
7.4.2. Test Procedure Used	63
7.4.3. Test Setting.....	63
7.4.4. Test Setup	63
7.4.5. Test Result.....	64
7.5. Transmit Power Control	72
7.5.1. Test Limit	72
7.5.2. Test Procedure Used	72
7.5.3. Test Setting.....	72
7.5.4. Test Setup	72
7.5.5. Test Result.....	72
7.6. Power Spectral Density Measurement	73
7.6.1. Test Limit	73
7.6.2. Test Procedure Used	73
7.6.3. Test Setting.....	73
7.6.4. Test Setup	74
7.6.5. Test Result.....	75
7.7. Frequency Stability Measurement.....	122
7.7.1. Test Limit	122
7.7.2. Test Limit	122
7.7.3. Test Setup	123
7.7.4. Test Result.....	123
7.8. Radiated Spurious Emission Measurement	124
7.8.1. Test Limit	124
7.8.2. Test Procedure Used	124
7.8.3. Test Setting.....	124
7.8.4. Test Setup	126
7.8.5. Test Result.....	127
7.9. Radiated Restricted Band Edge Measurement	327
7.9.1. Test Limit	327
7.9.2. Test Procedure Used	328
7.9.3. Test Setting.....	328
7.9.4. Test Setup	329

7.9.5. Test Result.....	330
7.10. AC Conducted Emissions Measurement.....	544
7.10.1. Test Limit	544
7.10.2. Test Procedure	544
7.10.3. Test Setup	545
7.10.4. Test Result.....	546
8. CONCLUSION.....	550
Appendix A : Test Setup Photograph	551
Appendix B : EUT Photograph.....	551
Appendix C : Internal Photograph	551

General Information

Applicant	Honeywell International Inc. Honeywell Safety and Productivity Solutions
Applicant Address	9680 Old Bailes Rd. Fort Mill, SC 29707 United States
Manufacturer	Honeywell International Inc. Honeywell Safety and Productivity Solutions
Manufacturer Address	9680 Old Bailes Rd. Fort Mill, SC 29707 United States
Test Site	MRT Technology (Taiwan) Co., Ltd
Test Site Address	No. 38, Fuxing Second Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C)
MRT FCC Registration No.	291082
FCC Rule Part(s)	Part 15.407

Test Facility / Accreditations

1. MRT facility is a FCC registered (Reg. No. 291082) test facility with the site description report on file and is designated by the FCC as an Accredited Test Firm.
2. MRT facility is an IC registered (MRT Reg. No. 21723) test laboratory with the site description on file at Industry Canada.
3. MRT Lab is accredited to ISO 17025 by the Taiwan Accreditation Foundation (TAF Cert. No. 3261) in EMC, Telecommunications and Radio testing for FCC (Designation Number: TW3261), Industry Canada, EU and TELEC Rules.


1. INTRODUCTION

1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada and Certification and Engineering Bureau.

1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taoyuan City. These measurement tests were conducted at the MRT Technology (Taiwan) Co., Ltd. Facility located at No.38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 33377, Taiwan (R.O.C).

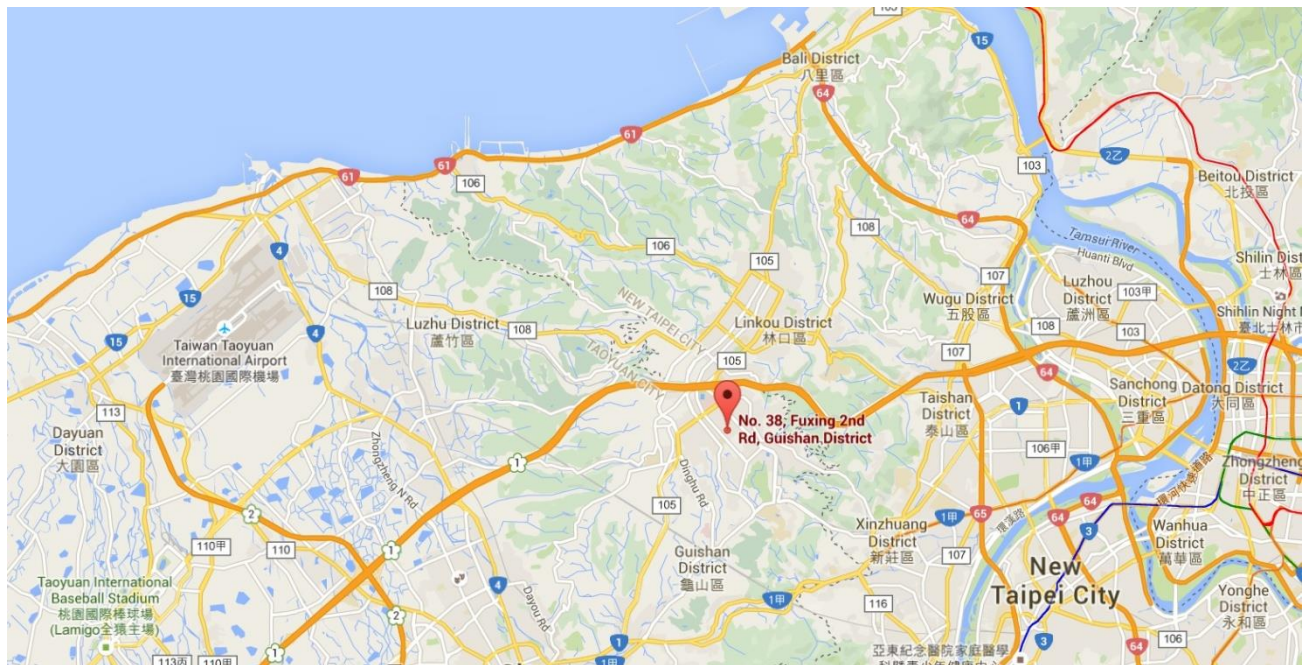

2. PRODUCT INFORMATION

2.1. Equipment Description

Product Name:	Mobile Computer
Model No.:	CK67X0N
Brand Name:	Honeywell
Wi-Fi Specification	802.11a/b/g/n/ac/ax
Bluetooth Specification	Main BT/BLE : V5.3 dual mode + 2 nd BLE: V5.3 Single mode
NFC Specification	13.56MHz
EUT Identification No.:	#24150D83DF (Conducted) #24150D865D (Radiated)
Accessory	
Battery	Brand: Honeywell MODEL:CK65-BTSC Rating: 3.6Vdc, 7000mAh, 25.2Wh

Note:

1. For other features of this EUT, test report will be issued separately.
2. This product has 3 scanners, 5 keypads, can refer as below:

Scanner	S0703	S0803FR	S0803	--	--
Keypad	Alpha Numeric	Numeric	Large Numeric	53keys Alpha Numeric	42keys Numeric

3. This report selected S0803FR with Alpha Numeric as the main test.

2.2. Product Specification Subjective to this Report

Frequency Range:	For 802.11a/n-HT20/ac-VHT20/ax-HE20: 5180~5240MHz, 5260~5320MHz, 5500~5720MHz, 5745~5825MHz For 802.11n-HT40/ac-VHT40/ax-HE40: 5190~5230MHz, 5270~5310MHz, 5510~5710MHz, 5755~5795MHz For 802.11ac-VHT80/ax-HE80: 5210MHz, 5290MHz, 5530MHz, 5610 MHz, 5690MHz, 5775MHz For 802.11ac-VHT160/ax-HE160: 5250MHz, 5570MHz
Type of Modulation:	802.11a/n/ac: OFDM 802.11ax: OFDMA
Data Rate	802.11a: 6/9/12/18/24/36/48/54Mbps 802.11n: up to 300Mbps 802.11ac: up to 1733.3Mbps 802.11ax: up to 2402Mbps

Note: For other features of this EUT, test report will be issued separately.

2.3. Working Frequencies for this report

802.11a/n-HT20/ac-VHT20/ax-HE20

Channel	Frequency	Channel	Frequency	Channel	Frequency
36	5180 MHz	40	5200 MHz	44	5220 MHz
48	5240 MHz	52	5260 MHz	56	5280 MHz
60	5300 MHz	64	5320 MHz	100	5500 MHz
104	5520 MHz	108	5540 MHz	112	5560 MHz
116	5580 MHz	120	5600 MHz	124	5620 MHz
128	5640 MHz	132	5660 MHz	136	5680 MHz
140	5700 MHz	144	5720 MHz	149	5745 MHz
153	5765 MHz	157	5785 MHz	161	5805 MHz
165	5825 MHz	--	--	--	--

802.11n-HT40/ac-VHT40/ax-HE40

Channel	Frequency	Channel	Frequency	Channel	Frequency
38	5190 MHz	46	5230 MHz	54	5270 MHz
62	5310 MHz	102	5510 MHz	110	5550MHz
118	5590 MHz	126	5630 MHz	134	5670 MHz
142	5710 MHz	151	5755 MHz	159	5795 MHz

802.11ac-VHT80/ax-HE80

Channel	Frequency	Channel	Frequency	Channel	Frequency
42	5210 MHz	58	5290 MHz	106	5530 MHz
122	5610 MHz	138	5690 MHz	155	5775 MHz

802.11ac-VHT160/ax-HE160

Channel	Frequency	Channel	Frequency	Channel	Frequency
50	5250MHz	114	5570 MHz	--	--

2.4. Description of Available Antennas

Antenna Type	Frequency Band (MHz)	Tx Paths	Number of spatial streams	Max Antenna Gain (dBi)	Beamforming Directional Gain(dBi)	CDD Directional Gain (dBi)	
						For Power	For PSD
Wi-Fi Antenna							
PIFA	2412 ~ 2462	2	1	3.00	--	3.00	5.67
	5150 ~ 5250	2	1	2.50	--	2.50	5.07
	5250 ~ 5350	2	1	2.40	--	2.40	5.16
	5470 ~ 5725	2	1	2.70	--	2.70	5.42
	5725 ~ 5850	2	1	2.60	--	2.60	5.61
	5850 ~ 5895	2	1	2.60	--	2.60	5.61
	5925 ~ 6425	2	1	3.00	--	3.00	5.86
	6425 ~ 6525	2	1	3.00	--	3.00	5.86
	6525 ~ 6875	2	1	4.00	--	4.00	6.52
	6875 ~ 7125	2	1	3.90	--	3.90	6.81

Remark:

- The EUT supports Cyclic Delay Diversity (CDD) mode, and CDD signals are correlated.

If antenna gains are not equal, the user may use either of the following methods to calculate directional gain, provided that each transmit antenna is driven by only one spatial stream follows.

- For power spectral density (PSD) measurements on all devices,

$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ant}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

- For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB for $N_{ANT} \leq 4$;

- All messages of antenna were declared by manufacturer.

Test Mode	Tx Paths	CDD Mode	Beamforming Mode
802.11b/g/n (DTS)	2	√	X
802.11ax (DTS)	2	√	X
802.11a/n (NII)	2	√	X
802.11ac/ax (NII)	2	√	X
802.11ax (6XD)	2	√	X


2.5. Test Mode

CDD Mode
Mode 1: Transmit by 802.11a_ (6Mbps) (CDD mode)
Mode 2: Transmit by 802.11ac-VHT20_ (MCS0) (CDD mode)
Mode 3: Transmit by 802.11ac-VHT40_ (MCS0) (CDD mode)
Mode 4: Transmit by 802.11ac-VHT80_ (MCS0) (CDD mode)
Mode 5: Transmit by 802.11ac-VHT160_ (MCS0) (CDD mode)
Mode 6: Transmit by 802.11ax-HE20_ (MCS0) (CDD mode)
Mode 7: Transmit by 802.11ax-HE40_ (MCS0) (CDD mode)
Mode 8: Transmit by 802.11ax-HE80_ (MCS0) (CDD mode)
Mode 9: Transmit by 802.11ax-HE160_ (MCS0) (CDD mode)
Mode 10: Transmit by 802.11ax-HE20_26Tone_RU0 (CDD mode)
Mode 11: Transmit by 802.11ax-HE20_26Tone_RU8 (CDD mode)
Mode 12: Transmit by 802.11ax-HE20_52Tone_RU74 (CDD mode)
Mode 13: Transmit by 802.11ax-HE20_52Tone_RU77 (CDD mode)
Mode 14: Transmit by 802.11ax-HE20_106Tone_RU106 (CDD mode)
Mode 15: Transmit by 802.11ax-HE20_106Tone_RU107 (CDD mode)
Mode 16: Transmit by 802.11ax-HE20_242Tone_RU122 (CDD mode)
Remark: 1. For Radiated emission, the modulation and the data rate picked for testing are determined by the Max. RF conducted power. 2. Due to the same modulation between 802.11n and 802.11ac, so 802.11n-HT20 and HT40 are covered by 802.11ac-VHT20 and VHT40 in this report.

2.6. Configuration of Test System

The device was tested per the guidance ANSI C63.10: 2013 was used to reference the appropriate EUT setup for radiated emissions testing and AC line conducted testing.

Connection Diagram

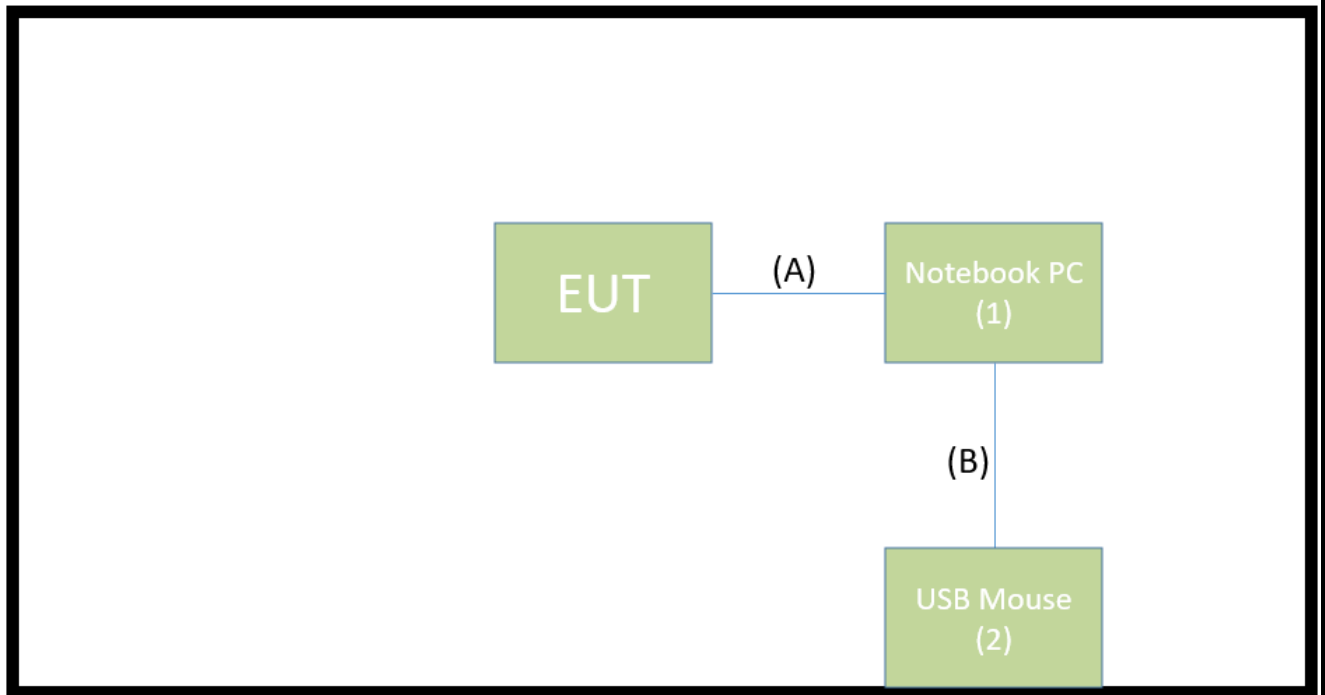

Signal Cable Type		Signal Cable Description
A	USB Cable	Shielded, 1.0m
B	USB Mouse Cable	Shielded, 1.8m

2.7. Test System Details

The types for all equipments, plus descriptions of all cables used in the tested system (including inserted cards) are:

	Product	Manufacturer	Model No.	Serial No.	Power Cord
1	Notebook PC	DELL	P65F	N/A	Non-shielded, 0.8m
2	USB Mouse	Logitech	M90	N/A	N/A

2.8. Description of Test Software

The test utility software used during testing was “QRCT”, the version is ver4.0-00209.

Note: Final power setting please refer to operational description.

2.9. Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15.407
- KDB 789033 D02v02r01,
- KDB 662911 D01v02r01
- ANSI C63.10-2013


2.10. Duty Cycle

5GHz (NII) operation is possible in 20MHz, 40MHz, 80MHz and 160MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:


Test Mode	Duty Cycle
802.11a	99.24%
802.11ac-VHT20	99.81%
802.11ac-VHT40	99.08%
802.11ac-VHT80	98.56%
802.11ac-VHT160	99.10%
802.11ax-HE20	99.82%
802.11ax-HE40	98.76%
802.11ax-HE80	98.91%
802.11ax-HE160	98.74%
802.11ax-HE20_26 Tone_RU4	99.41%
802.11ax-HE20_52 Tone_RU75	99.61%
802.11ax-HE20_106 Tone_RU106	99.58%
802.11ax-HE20_242 Tone_RU122	99.77%
802.11ax-HE40_484 Tone_RU130	98.75%
802.11ax-HE80_996 Tone_RU134	97.50%
802.11ax-HE160_1992 Tone_RU136	97.69%

Duty Cycle


802.11a

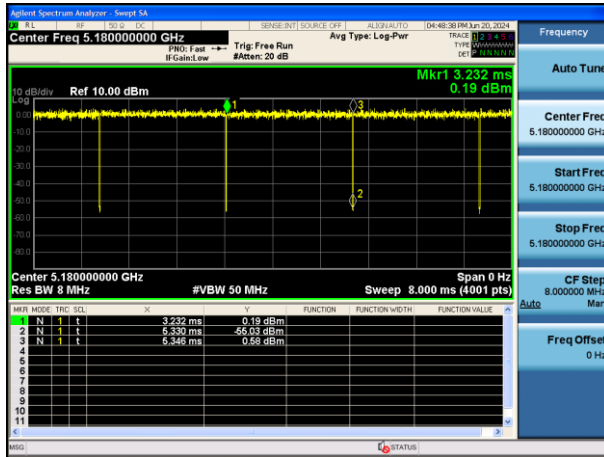


802.11ac-VHT20

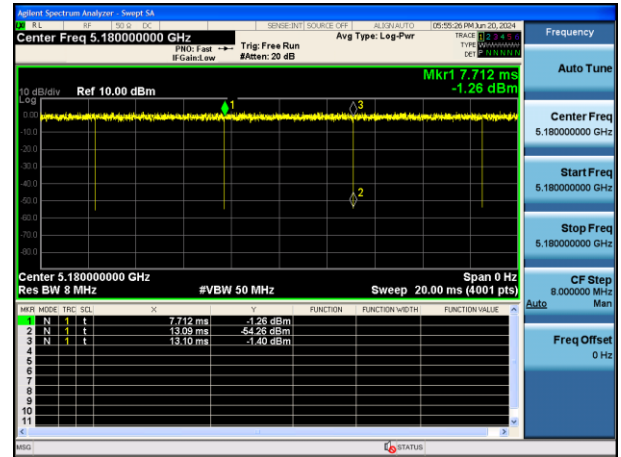


802.11ac-VHT40

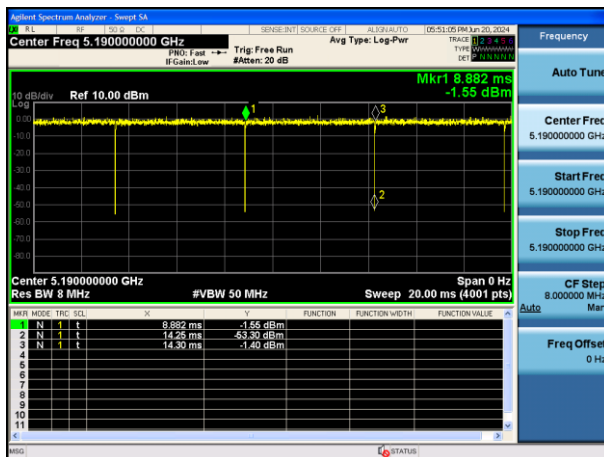


802.11ac-VHT80

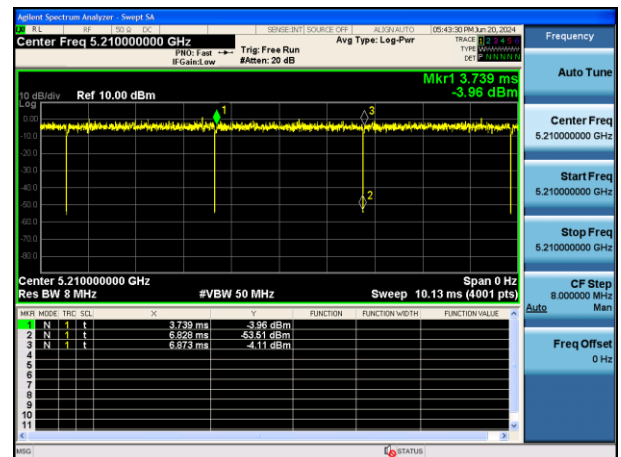


802.11ac-VHT160

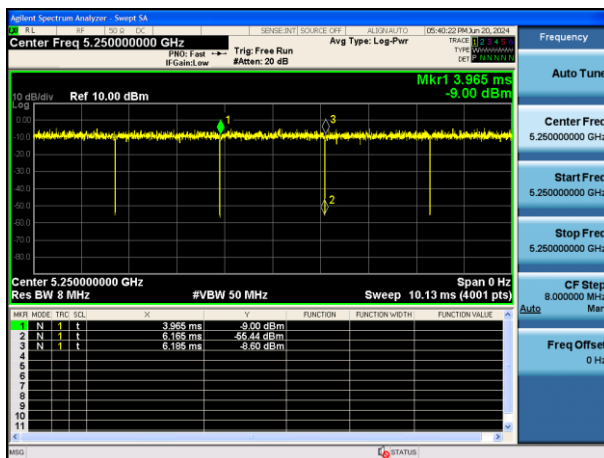


802.11ax-HE20

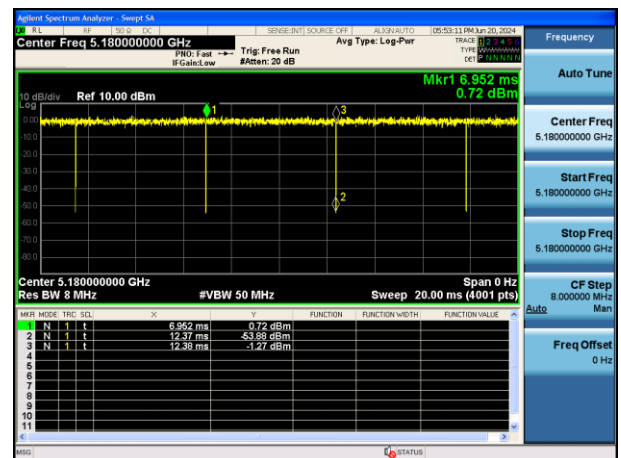


802.11ax-HE40

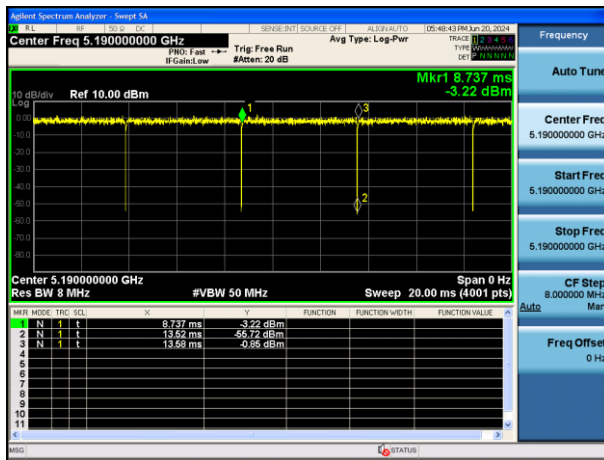

802.11ax-HE80

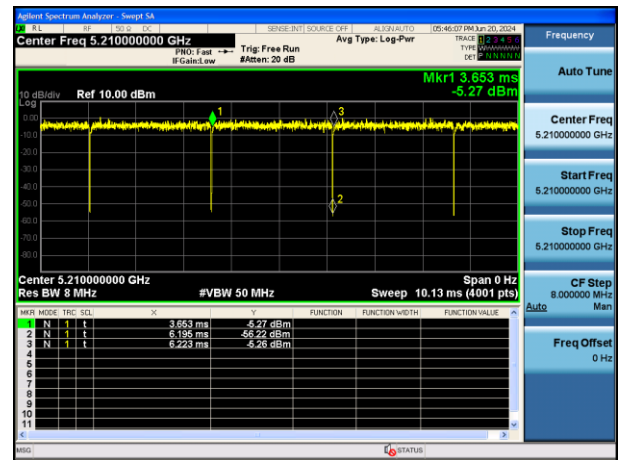


802.11ax-HE160

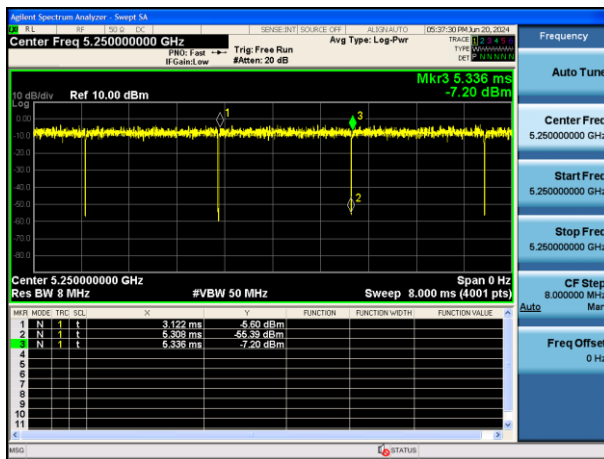


Duty Cycle


802.11ax-HE20_26 Tone_RU4

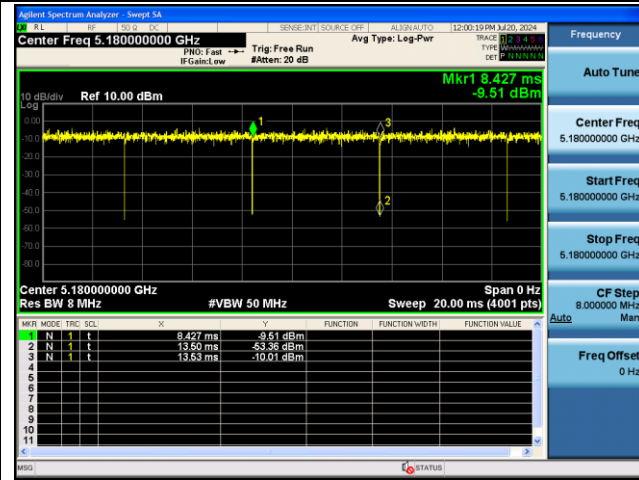


802.11ax-HE20_52 Tone_RU75

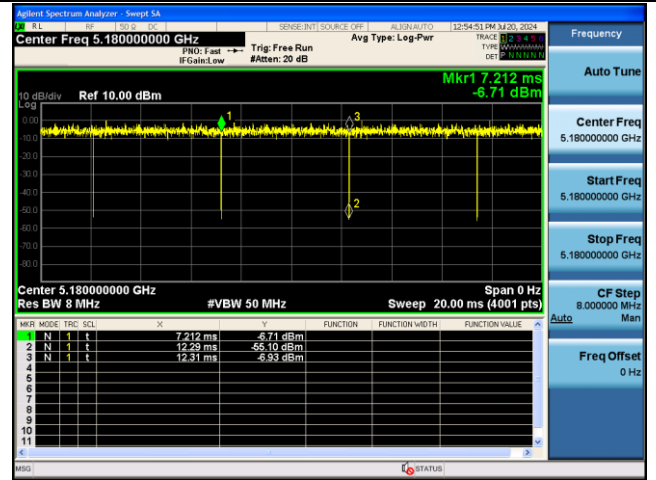


802.11ax-HE20_106 Tone_RU106

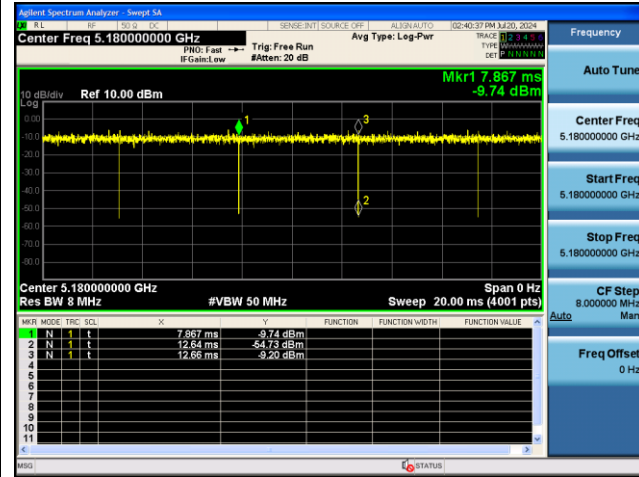


802.11ax-HE20_242 Tone_RU122

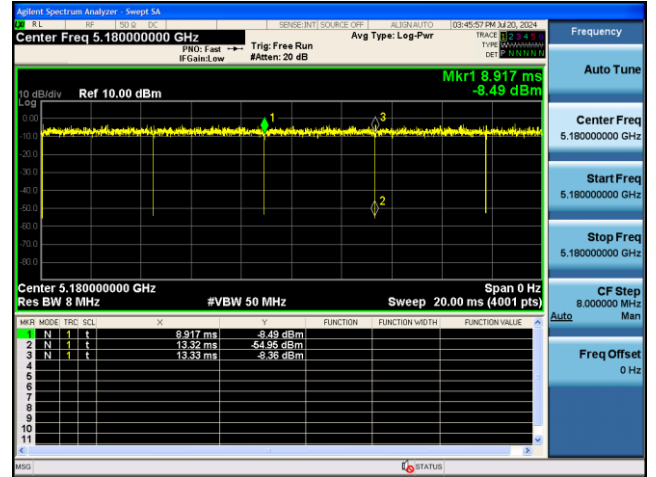


802.11ax-HE40_484 Tone_RU130

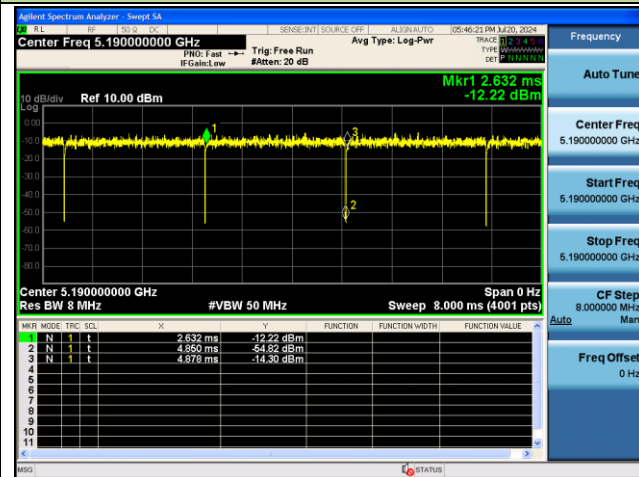

802.11ax-HE80_996 Tone_RU134

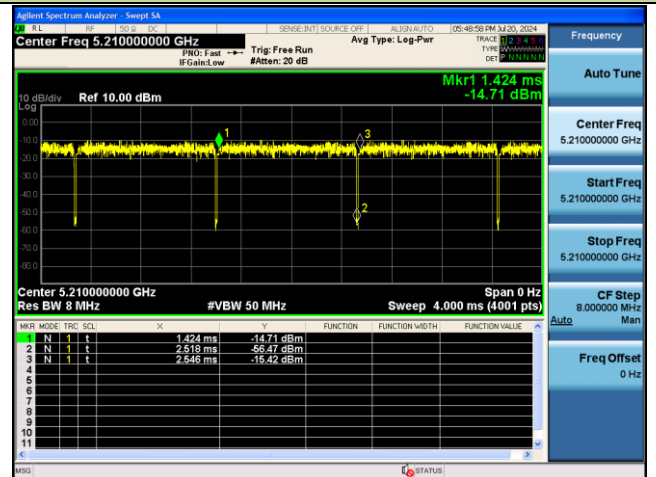

802.11ax-HE160_1992 Tone_RU136

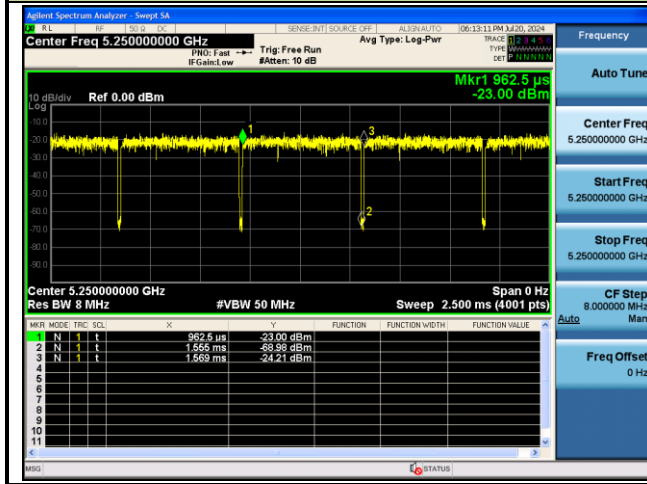

2.11. Test Configuration

The device was tested per the guidance of KDB 789033 D02v02r01. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing.

2.12. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

2.13. Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlets supplied to the user and be readily visible to the purchaser at the time of purchase.

However, when the device is so small wherein placement of the label with specified statement is not practical, only the FCC ID must be displayed on the device per Section 15.19(a)(5). Please see attachment for FCC ID label and label location.

3. DESCRIPTION OF TEST

3.1. Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013), and the guidance provided in KDB 789033 D02v02r01 were used in the measurement.

3.2. AC Line Conducted Emissions

The line-conducted facility is located inside an 8'x4'x4' shielded enclosure. A 1m x 2m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50uH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground-plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the receiver and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The receiver was scanned from 150kHz to 30MHz. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or data exchange speed, or support equipment whichever determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions are used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

An extension cord was used to connect to a single LISN which powered by EUT. The extension cord was calibrated with LISN, the impedance and insertion loss are compliance with the requirements as stated in ANSI C63.10-2013.

3.3. Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. A MF Model 210SS turntable is used for radiated measurement. It is a continuously rotatable, remotecontrolled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm high PVC support structure is placed on top of the turntable.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up for frequencies below 1GHz was placed on top of the 0.8 meter high, 1 x 1.5 meter table; and test set-up for frequencies 1-40GHz was placed on top of the 1.5 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions. According to 3dB Beam-Width of horn antenna, the horn antenna should be always directed to the EUT when rising height.

4. ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the device is **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The unit complies with the requirement of §15.203.

5. TEST EQUIPMENT CALIBRATION DATE

Conducted Emissions

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Two-Line V-Network	R&S	ENV216	MRTTWA00019	1 year	2025/3/5
Two-Line V-Network	R&S	ENV216	MRTTWA00020	1 year	2025/4/21
EMI Test Receiver	R&S	ESR3	MRTTWA00045	1 year	2025/5/14
DIVA PLUS Funk-Wetterstation	TFA	35.1083	MRTTWA00050	1 year	2025/6/2

Radiated Emissions

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Active Loop Antenna	SCHWARZBECK	FMZB 1519B	MRTTWA00002	1 year	2025/5/7
Broadband TRILOG Antenna	SCHWARZBECK	VULB 9162	MRTTWA00001	1 year	2024/10/31
Broadband Hornantenna	RFSPIN	DRH18-E	MRTTWA00087	1 year	2025/5/20
Broadband Preamplifier	EMC Instruments corporation	EMC118A45SE	MRTTWA00088	1 year	2025/5/14
Breitband Hornantenna	SCHWARZBECK	BBHA 9170	MRTTWA00004	1 year	2025/3/26
Broadband Amplifier	SCHWARZBECK	BBV 9721	MRTTWA00006	1 year	2025/3/21
EMI Test Receiver	R&S	ESR3	MRTTWA00009	1 year	2025/3/5
Signal Analyzer	R&S	FSVA3044	MRTTWA00092	1 year	2025/6/20
Antenna Cable	HUBERSUHNER	SF106	MRTTWE00034	1 year	2025/6/25
Cable	HUBERSUHNER	EMC105-NM-N M-3000	MRTTWE00035	1 year	2025/6/25
Temperature/Humidity Meter	TFA	35.1083	MRTTWA00050	1 year	2025/6/2

Conducted Test Equipment

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
X-Series USB Peak and Average Power Sensor	KEYSIGHT	U2021XA	MRTTWA00014	1 year	2025/4/16
EXA Signal Analyzer	KEYSIGHT	N9010A	MRTTWA00012	1 year	2024/10/17
Attenuator	WTI	218FS-20	MRTTWE00026	1 year	2024/11/1
Attenuator	WTI	218FS-10	MRTTWE00027	1 year	2025/6/13
Temperature & Humidity Chamber	TEN BILLION	TTH-B3UP	MRTTWA00036	1 year	2025/6/6
DIVA PLUS Funk-Wetterstation	TFA	35.1083	MRTTWA00050	1 year	2025/6/2

Software	Version	Function
e3	9.160520a	EMI Test Software

6. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

AC Conducted Emission Measurement
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 150kHz~30MHz: $\pm 2.53\text{dB}$
Radiated Emission Measurement
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 9kHz ~ 1GHz: $\pm 4.25\text{dB}$ 1GHz ~ 40GHz: $\pm 4.45\text{dB}$
Conducted Power (Carrier Power / Power Density)
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): $\pm 0.84\text{dB}$
Conducted Spurious Emission
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): $\pm 2.65\text{ dB}$
Occupied Bandwidth
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): $\pm 3.3\%$
Temp. / Humidity
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): $\pm 0.82^\circ\text{C} / \pm 3\%$
Frequency Error
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): $\pm 78.4\text{Hz}$

7. TEST RESULT

7.1. Summary

FCC Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.407(a)	26dB Bandwidth	N/A	Conducted	Pass	Section 7.2
15.407(e)	6dB Bandwidth	$\geq 500\text{kHz}$		Pass	Section 7.3
15.407(a)(1)(ii), (2), (3)	Maximum Conducted Output Power	Refer to section 7.4		Pass (20.30dBm @avg)	Section 7.4
15.407(h)(1)	Transmit Power Control	$\leq 24\text{ dBm}$		Pass	Section 7.5
15.407(a)(1)(ii), (2), (3), (12)	Peak Power Spectral Density	Refer to section 7.6		Pass	Section 7.6
15.407(g)	Frequency Stability	N/A		Pass	Section 7.7
15.407(b)(1), (2), (3), (4)(i)	Undesirable Emissions	Refer to Section 7.8	Radiated	PASS (63.55dBuV/m@Peak)	Section 7.8
15.205, 15.209 15.407(b)(8), (9), (10)	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209		PASS (52.47dBuV/m@avg)	Section 7.9
15.207	AC Conducted Emissions 150kHz - 30MHz	< FCC 15.207 limits	Line Conducted	Pass	Section 7.10

Notes:

- Determining compliance is based on the test results met the regulation limits or requirements declared by clients, and the test results don't take into account the value of measurement uncertainty.
- The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- Output power test was verified over all data rates of each mode (data refers to operational description), and then choose the maximum power output (low data rate) for final test of each channel.
- For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst-case emissions.

7.2. 26dB Bandwidth Measurement

7.2.1. Test Limit

N/A

7.2.2. Test Procedure used


K DB 789033 D02v02r01- Section II)C.1) (26dB Bandwidth)

KDB 789033 D02v02r01- Section II)D) (99% Bandwidth)

7.2.3. Test Setting

1. The analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 26$. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediated power nulls in the fundamental emission.
2. RBW = approximately 1% of the emission bandwidth.
3. $VBW \geq 3 \times RBW$.
4. Detector = Peak.
5. Trace mode = max hold.

7.2.4. Test Setup

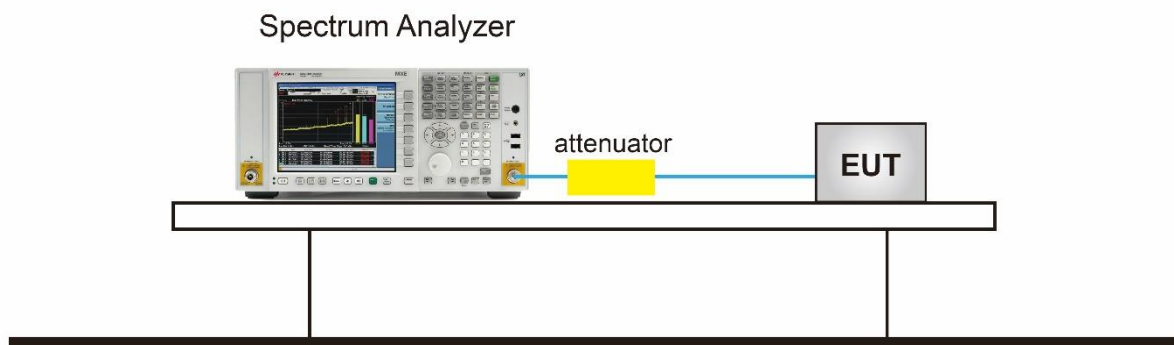

7.2.5.Test Result

Product	Mobile Computer	Test Engineer	Wen
Test Site	SR6	Test Date	2024/6/28~2024/7/1

Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
Ant 0					
802.11a	6Mbps	36	5180	18.09	16.290
802.11a	6Mbps	40	5200	18.83	16.304
802.11a	6Mbps	48	5240	18.25	16.302
802.11a	6Mbps	52	5260	18.18	16.291
802.11a	6Mbps	60	5300	18.25	16.291
802.11a	6Mbps	64	5320	17.95	16.278
802.11a	6Mbps	100	5500	18.42	16.297
802.11a	6Mbps	116	5580	18.22	16.290
802.11a	6Mbps	140	5700	18.34	16.311
802.11a	6Mbps	144	5720	18.41	16.303
802.11a	6Mbps	149	5745	19.36	16.298
802.11a	6Mbps	157	5785	18.73	16.280
802.11a	6Mbps	165	5825	18.65	16.295
802.11ac-VHT20	MCS0	36	5180	19.97	17.506
802.11ac-VHT20	MCS0	40	5200	19.47	17.516
802.11ac-VHT20	MCS0	48	5240	19.78	17.521
802.11ac-VHT20	MCS0	52	5260	19.61	17.493
802.11ac-VHT20	MCS0	60	5300	20.37	17.508
802.11ac-VHT20	MCS0	64	5320	20.48	17.514
802.11ac-VHT20	MCS0	100	5500	19.88	17.511
802.11ac-VHT20	MCS0	116	5580	19.63	17.493
802.11ac-VHT20	MCS0	140	5700	19.51	17.518
802.11ac-VHT20	MCS0	144	5720	19.83	17.509
802.11ac-VHT20	MCS0	149	5745	20.09	17.497
802.11ac-VHT20	MCS0	157	5785	19.31	17.479
802.11ac-VHT20	MCS0	165	5825	19.79	17.522


Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
Ant 0					
802.11ac-VHT40	MCS0	38	5190	39.55	35.918
802.11ac-VHT40	MCS0	46	5230	39.30	35.936
802.11ac-VHT40	MCS0	54	5270	39.31	35.932
802.11ac-VHT40	MCS0	62	5310	38.72	35.892
802.11ac-VHT40	MCS0	102	5510	39.25	35.928
802.11ac-VHT40	MCS0	110	5550	38.79	35.939
802.11ac-VHT40	MCS0	134	5670	39.35	35.899
802.11ac-VHT40	MCS0	142	5710	39.35	35.888
802.11ac-VHT40	MCS0	151	5755	38.74	35.992
802.11ac-VHT40	MCS0	159	5795	38.91	35.932
802.11ac-VHT80	MCS0	42	5210	79.70	75.191
802.11ac-VHT80	MCS0	58	5290	80.07	75.116
802.11ac-VHT80	MCS0	106	5530	79.96	75.089
802.11ac-VHT80	MCS0	122	5610	79.23	75.127
802.11ac-VHT80	MCS0	138	5690	79.87	75.151
802.11ac-VHT80	MCS0	155	5775	79.73	75.103
802.11ac-VHT160	MCS0	50	5250	160.8	154.28
802.11ac-VHT160	MCS0	114	5570	161.5	154.02
802.11ax-HE20	MCS0	36	5180	20.63	18.845
802.11ax-HE20	MCS0	40	5200	20.42	18.854
802.11ax-HE20	MCS0	48	5240	20.58	18.809
802.11ax-HE20	MCS0	52	5260	20.14	18.835
802.11ax-HE20	MCS0	60	5300	20.41	18.822
802.11ax-HE20	MCS0	64	5320	20.15	18.774
802.11ax-HE20	MCS0	100	5500	20.45	18.885
802.11ax-HE20	MCS0	116	5580	20.20	18.844
802.11ax-HE20	MCS0	140	5700	20.46	18.841
802.11ax-HE20	MCS0	144	5720	20.52	18.841
802.11ax-HE20	MCS0	149	5745	20.81	18.859
802.11ax-HE20	MCS0	157	5785	20.39	18.851
802.11ax-HE20	MCS0	165	5825	19.96	18.858

Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
Ant 0					
802.11ax-HE40	MCS0	38	5190	39.81	37.543
802.11ax-HE40	MCS0	46	5230	39.41	37.677
802.11ax-HE40	MCS0	54	5270	39.51	37.681
802.11ax-HE40	MCS0	62	5310	39.66	37.590
802.11ax-HE40	MCS0	102	5510	39.52	37.655
802.11ax-HE40	MCS0	110	5550	39.29	37.500
802.11ax-HE40	MCS0	134	5670	39.61	37.642
802.11ax-HE40	MCS0	142	5710	39.78	37.594
802.11ax-HE40	MCS0	151	5755	40.44	37.596
802.11ax-HE40	MCS0	159	5795	39.53	37.696
802.11ax-HE80	MCS0	42	5210	80.26	76.814
802.11ax-HE80	MCS0	58	5290	80.29	76.888
802.11ax-HE80	MCS0	106	5530	80.21	76.708
802.11ax-HE80	MCS0	122	5610	80.80	76.724
802.11ax-HE80	MCS0	138	5690	80.13	76.984
802.11ax-HE80	MCS0	155	5775	80.25	76.781
802.11ax-HE160	MCS0	50	5250	162.4	155.93
802.11ax-HE160	MCS0	114	5570	162.6	155.68


Test Mode	RU Size	RU Index	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
Ant 0						
802.11ax-HE20	26 Tone	RU 0	36	5180	19.98	18.227
802.11ax-HE20		RU 8	64	5320	18.55	17.186
802.11ax-HE20	26 Tone	RU 0	100	5500	17.31	16.351
802.11ax-HE20		RU 8	140	5700	20.01	17.765
802.11ax-HE20	26 Tone	RU 0	149	5745	16.78	15.628
802.11ax-HE20		RU 8	165	5825	18.72	17.738
802.11ax-HE20	52 Tone	RU 74	36	5180	20.70	18.335
802.11ax-HE20		RU 77	64	5320	17.19	15.778
802.11ax-HE20	52 Tone	RU 74	100	5500	11.06	6.2296
802.11ax-HE20		RU 77	140	5700	13.19	11.018
802.11ax-HE20	52 Tone	RU 74	149	5745	10.29	8.647
802.11ax-HE20		RU 77	165	5825	20.49	14.151
802.11ax-HE20	106 Tone	RU 106	36	5180	18.01	16.197
802.11ax-HE20		RU 107	64	5320	19.72	17.7890
802.11ax-HE20	106 Tone	RU 106	100	5500	17.45	15.807
802.11ax-HE20		RU 107	140	5700	18.90	17.389
802.11ax-HE20	106 Tone	RU 106	149	5745	17.29	15.368
802.11ax-HE20		RU 107	165	5825	18.57	16.711
802.11ax-HE20	242 Tone	RU 122	36	5180	21.68	19.000
802.11ax-HE20		RU 122	64	5320	22.65	19.001
802.11ax-HE20	242 Tone	RU 122	100	5500	21.45	19.005
802.11ax-HE20		RU 122	140	5700	21.52	19.006
802.11ax-HE20	242 Tone	RU 122	149	5745	28.76	19.021
802.11ax-HE20		RU 122	165	5825	25.27	19.060

802.11a 26dB Bandwidth & 99% Bandwidth


Channel 36 (5180MHz)

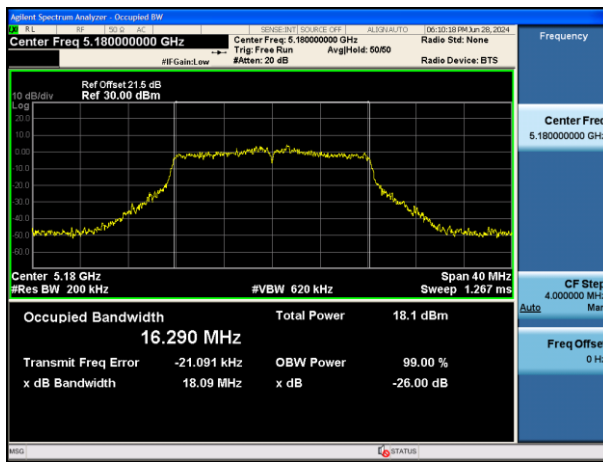


Channel 40 (5200MHz)

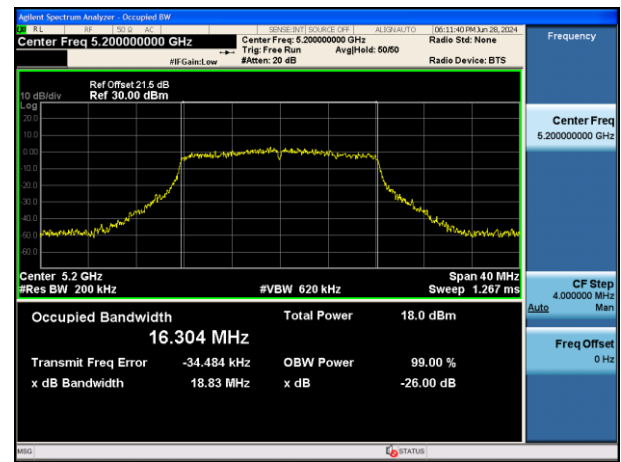


Channel 48 (5240MHz)

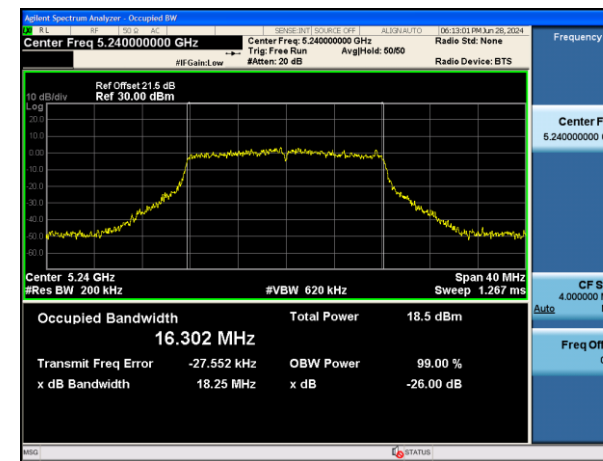


Channel 52 (5260MHz)

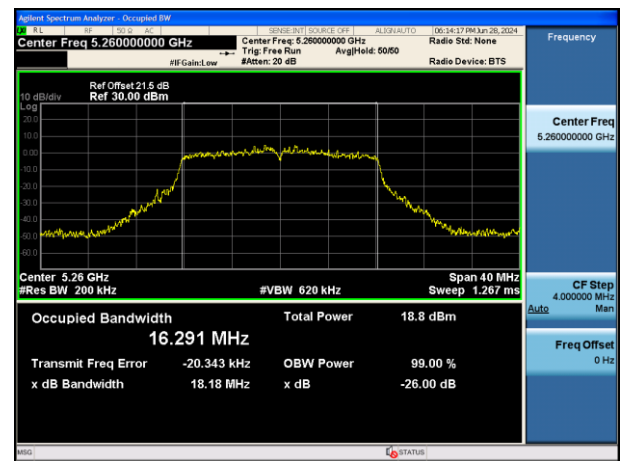


Channel 60 (5300MHz)

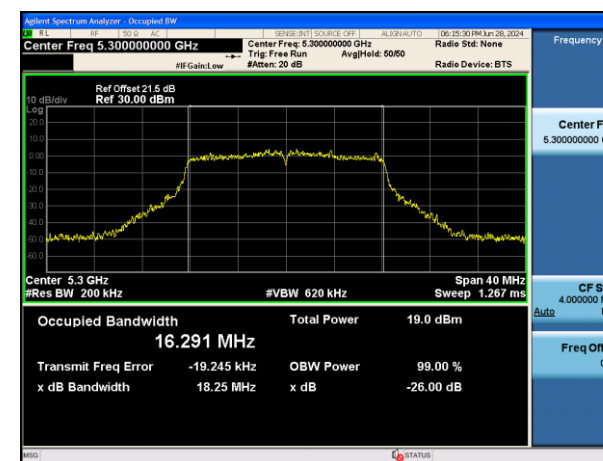


Channel 64 (5320MHz)

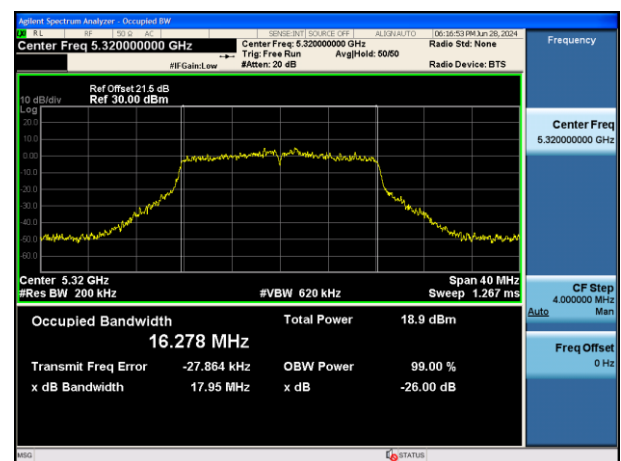


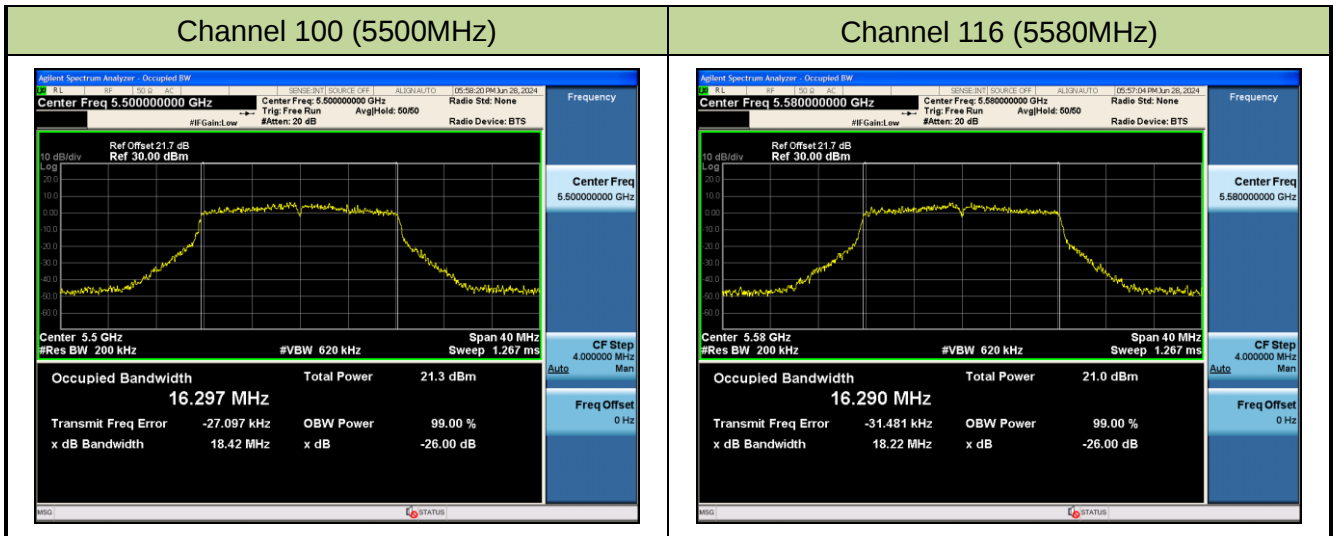


Channel 140 (5700MHz)

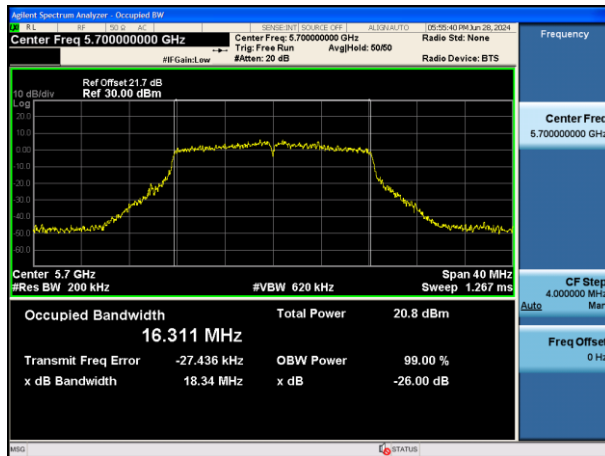


Channel 144 (5720MHz)

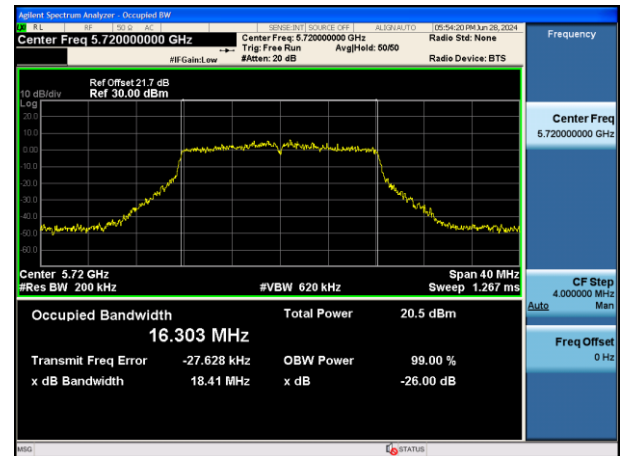


Channel 149 (5745MHz)

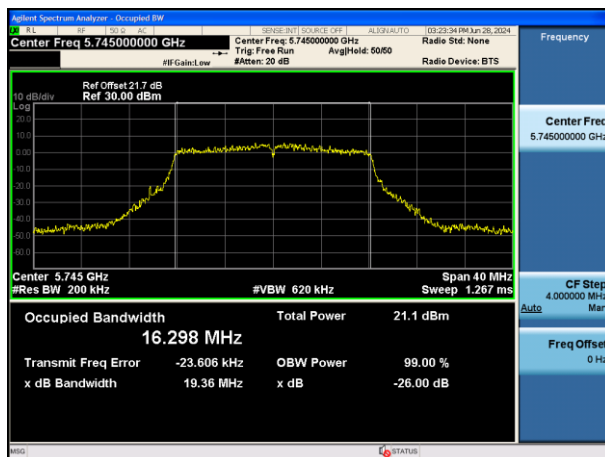

Channel 157 (5785MHz)

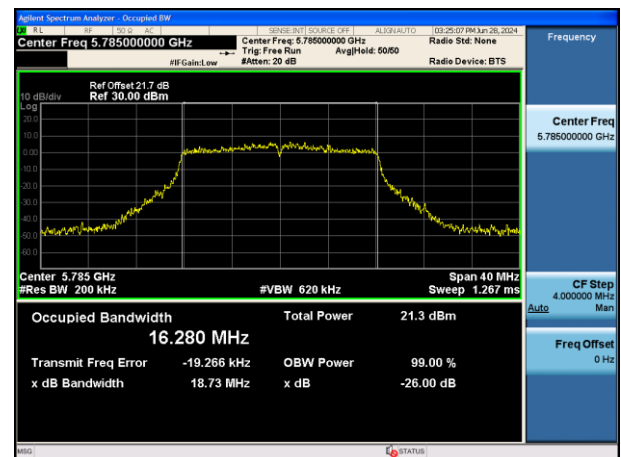


Channel 165 (5825MHz)

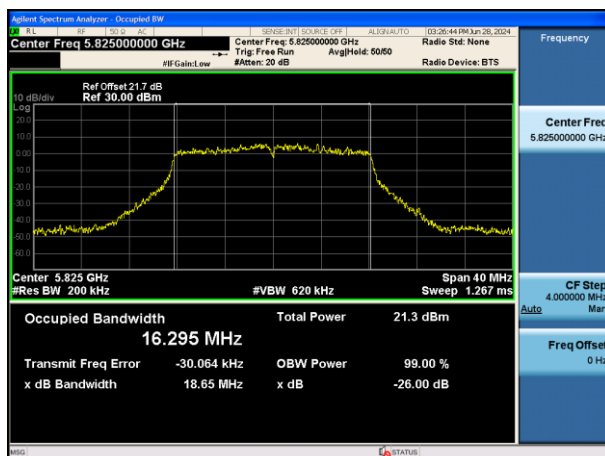


802.11ac-VHT20 26dB Bandwidth & 99% Bandwidth


Channel 36 (5180MHz)

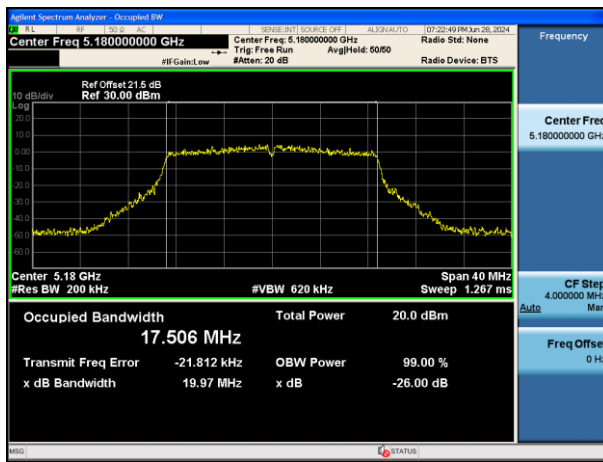


Channel 40 (5200MHz)

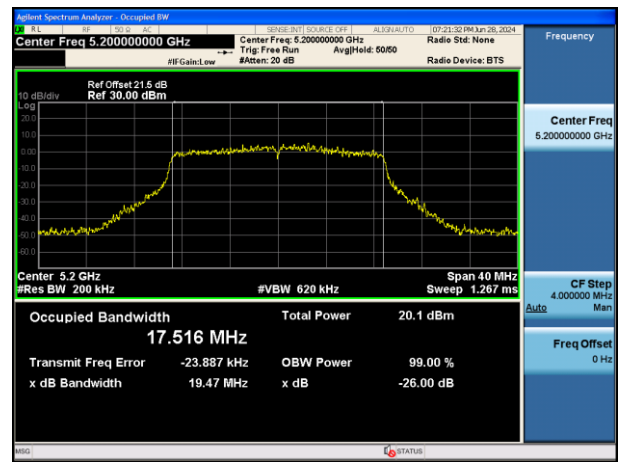


Channel 48 (5240MHz)

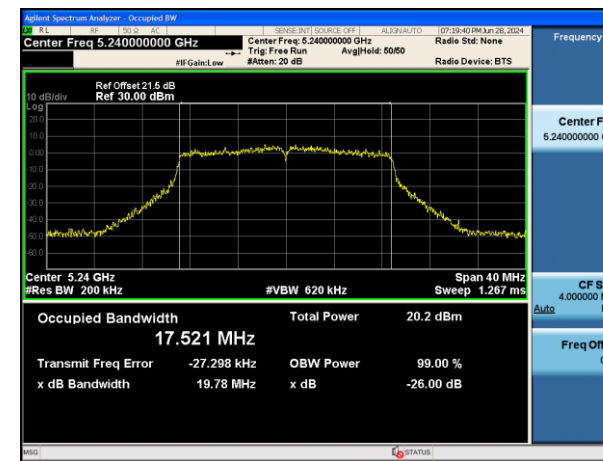


Channel 52 (5260MHz)

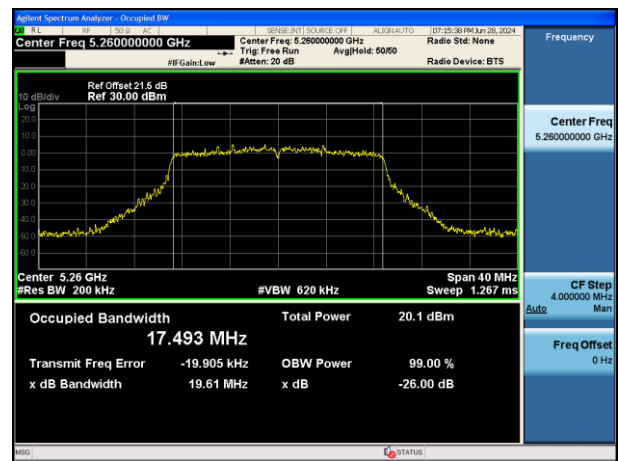


Channel 60 (5300MHz)

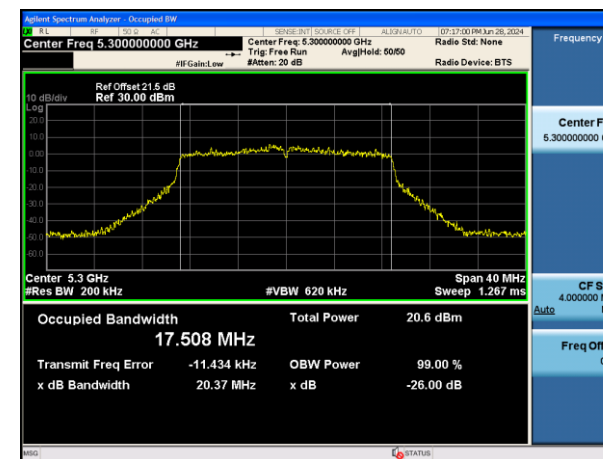


Channel 64 (5320MHz)

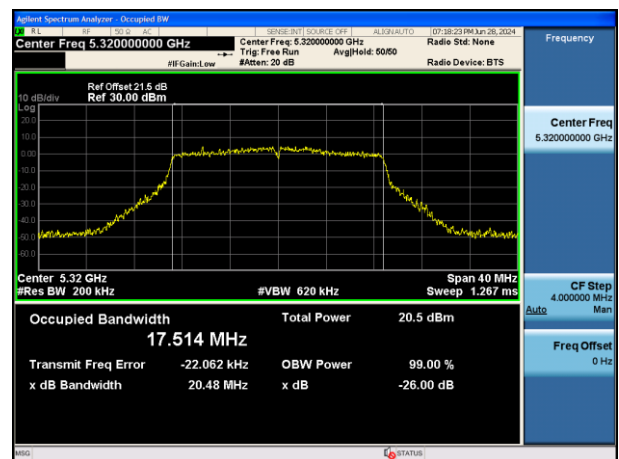


Channel 100 (5500MHz)

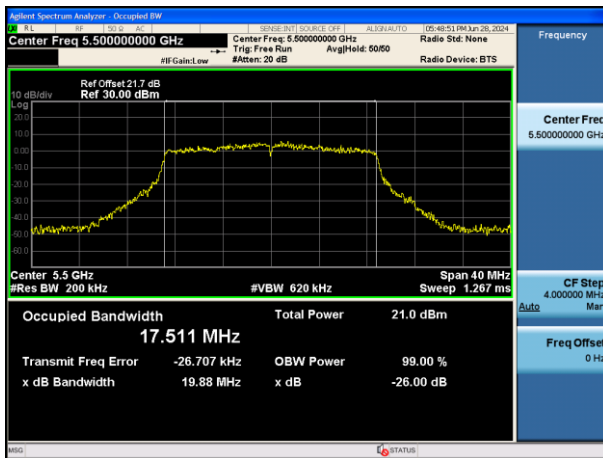


Channel 116 (5580MHz)

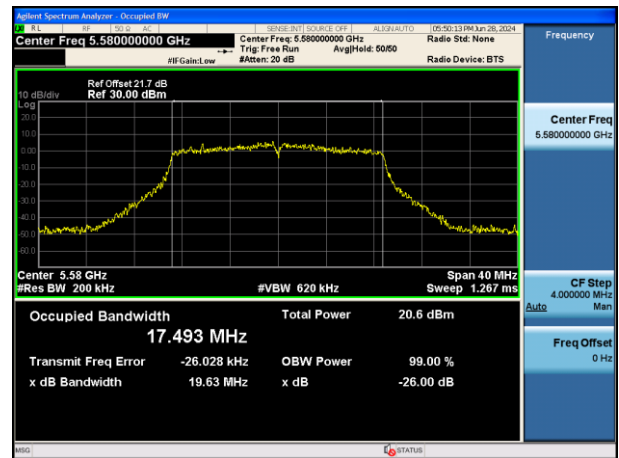


Channel 140 (5700MHz)

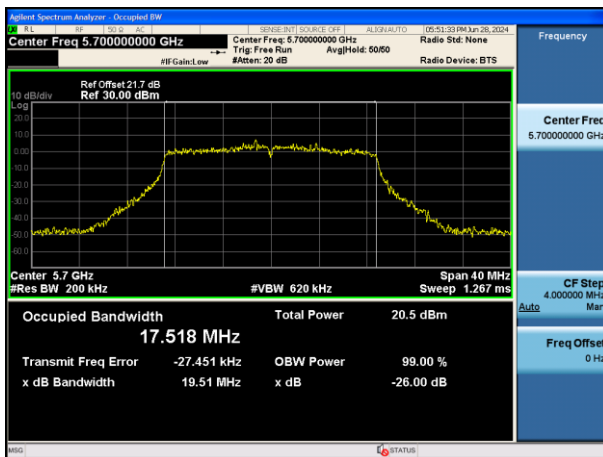


Channel 144 (5720MHz)

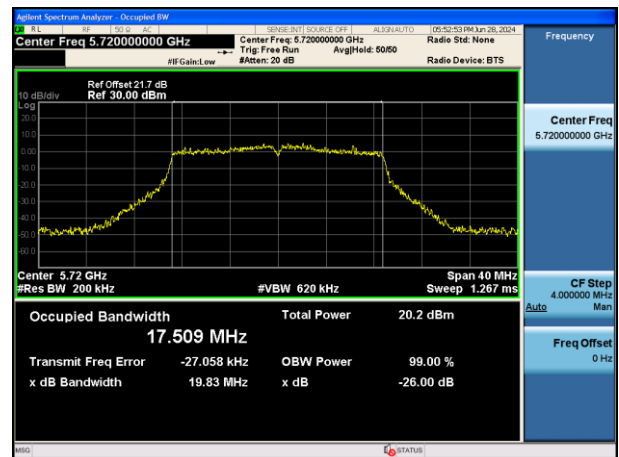


Channel 149 (5745MHz)

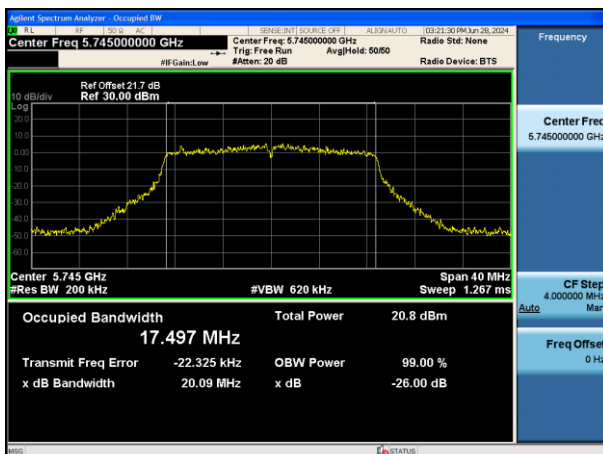


Channel 157 (5785MHz)

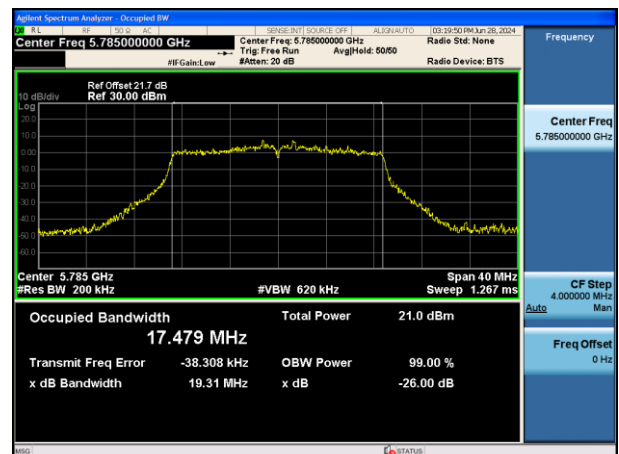

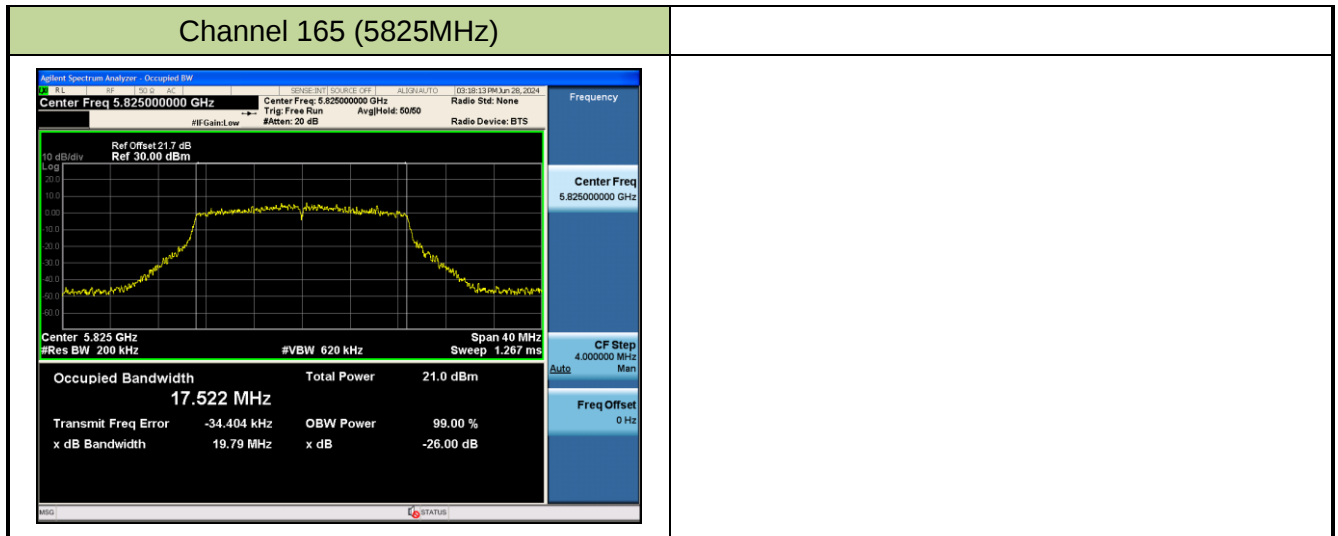


802.11ac-VHT40 26dB Bandwidth & 99% Bandwidth


Channel 38 (5190MHz)

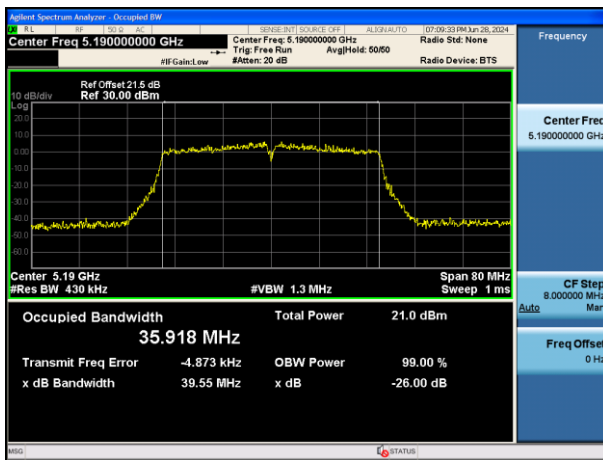


Channel 46 (5230MHz)

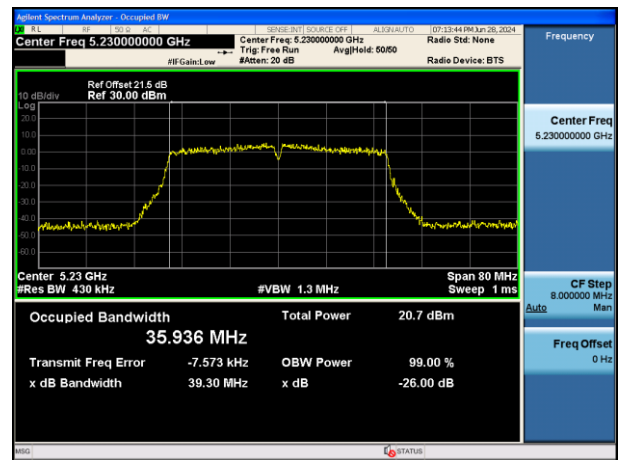


Channel 54 (5270MHz)

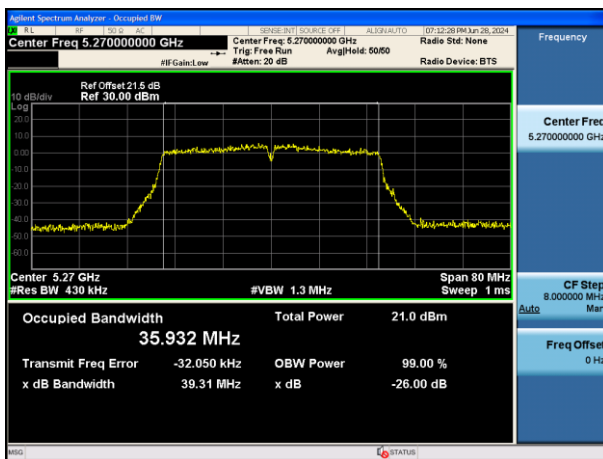


Channel 62 (5310MHz)

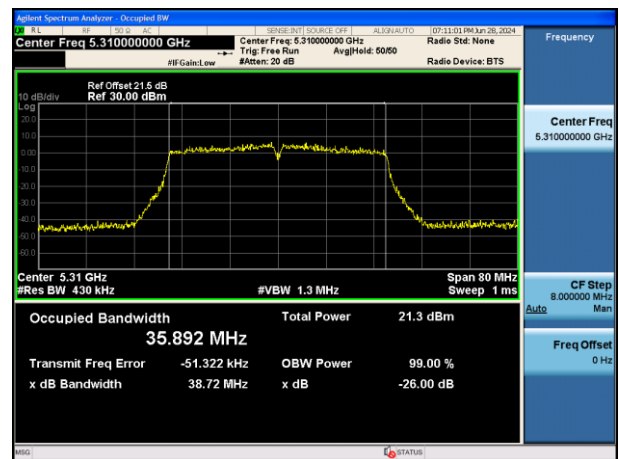


Channel 102 (5510MHz)

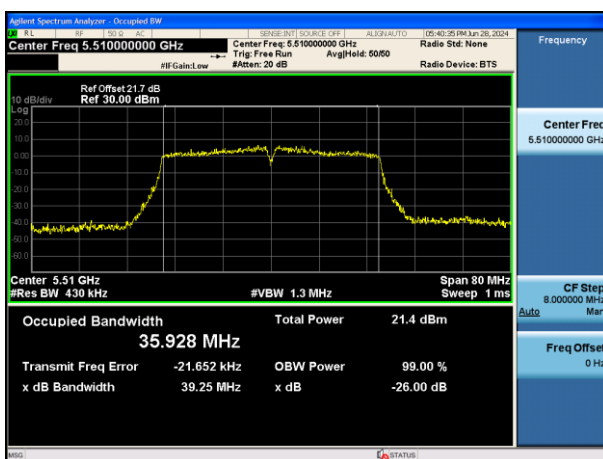


Channel 110 (5550MHz)

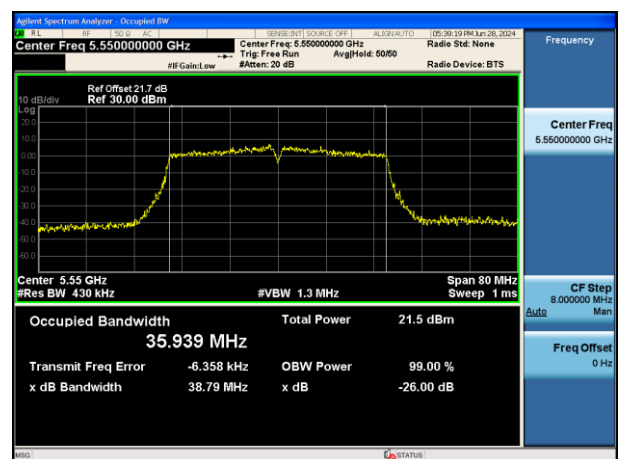


Channel 134 (5670MHz)

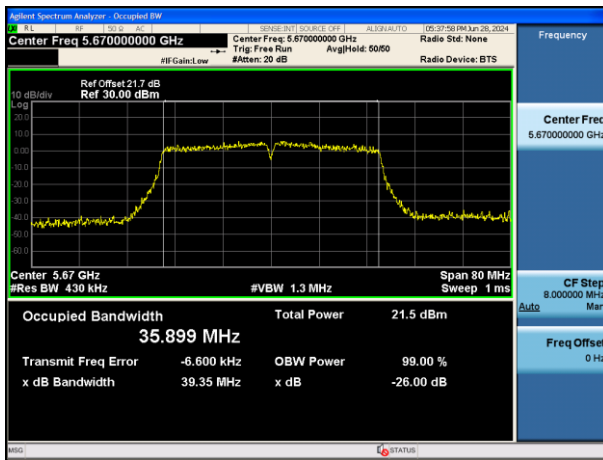

Channel 142 (5710MHz)

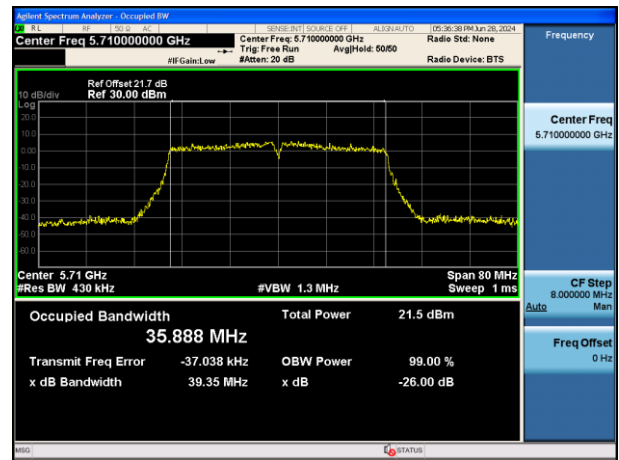

Channel 151 (5755MHz)

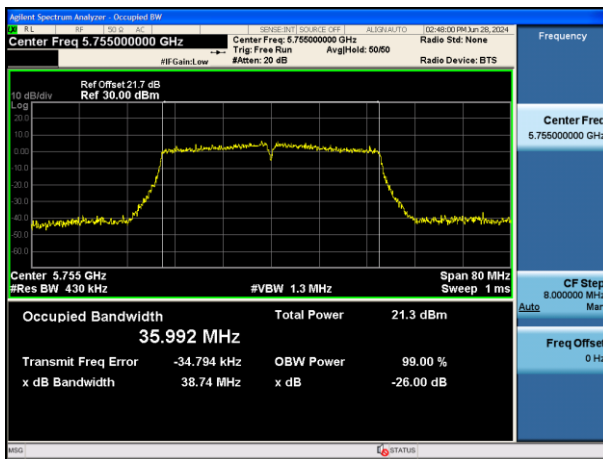

Channel 159 (5795MHz)

