



802.11ax-HE80 Power Spectral Density - Ant 1


Channel 42 (5210MHz)

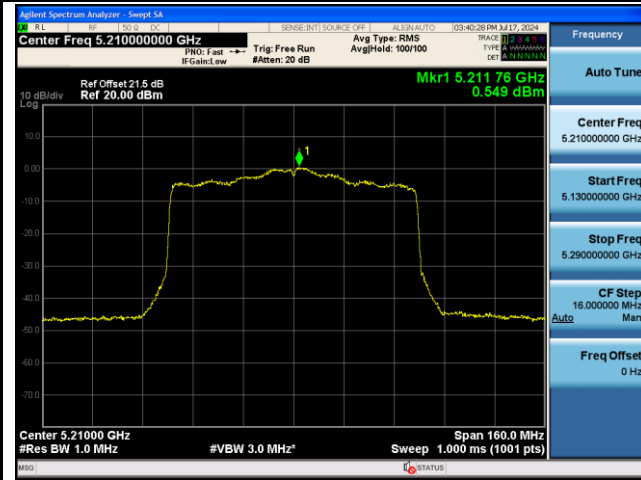


Channel 58 (5290MHz)

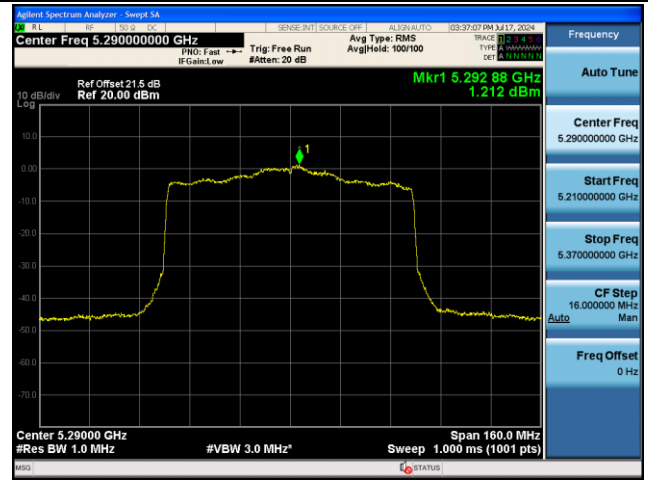


Channel 106 (5530MHz)

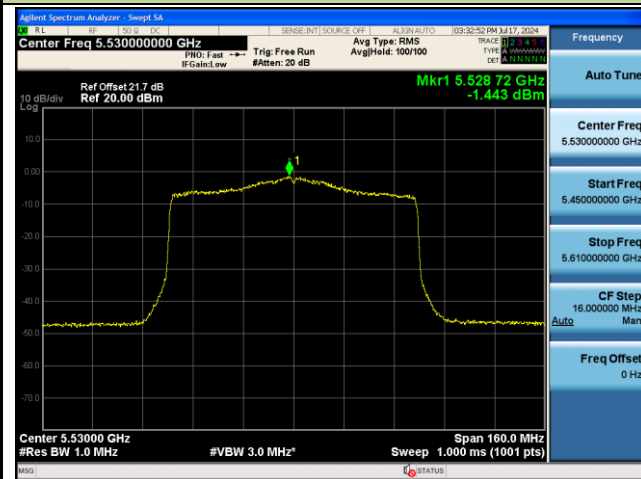


Channel 122 (5610MHz)

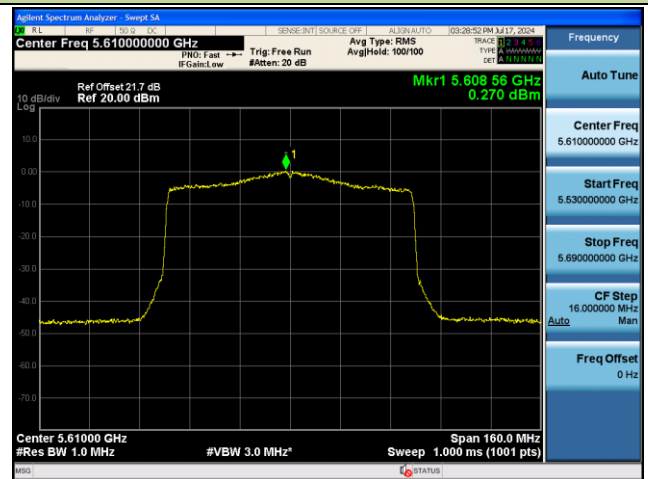

Channel 138 (5690MHz)

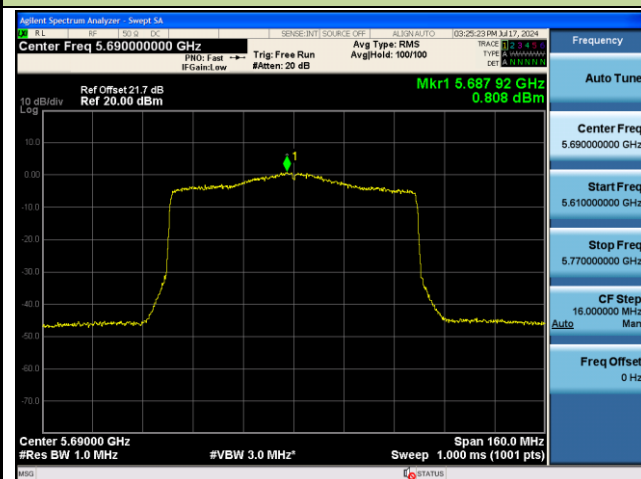


Channel 155 (5775MHz)

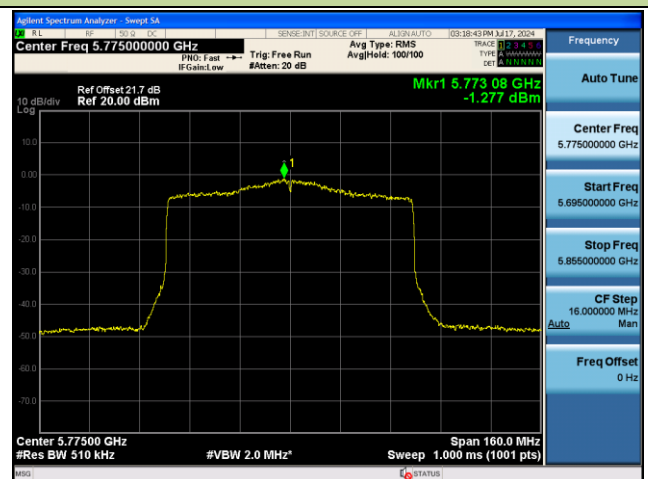


802.11ax-HE160 Power Spectral Density - Ant 1

Channel 50 (5250MHz)

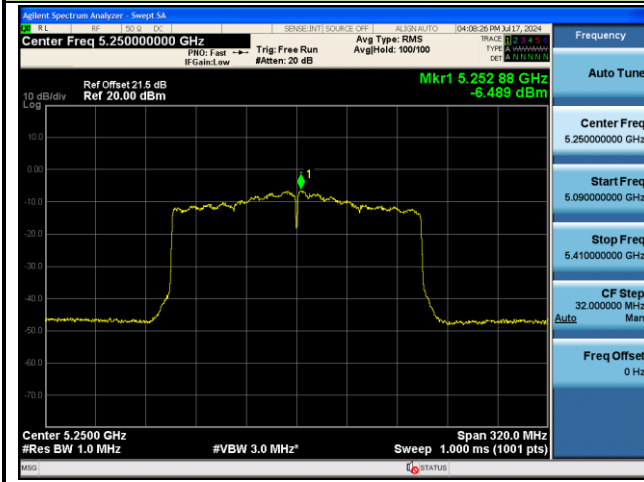


Channel 114 (5570MHz)

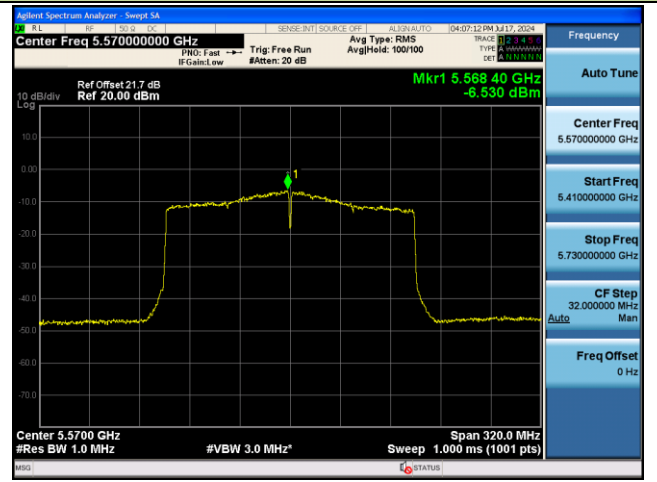


802.11ax-HE20 Power Spectral Density - Ant 1


26 Tone_RU0_CH36 (5180MHz)

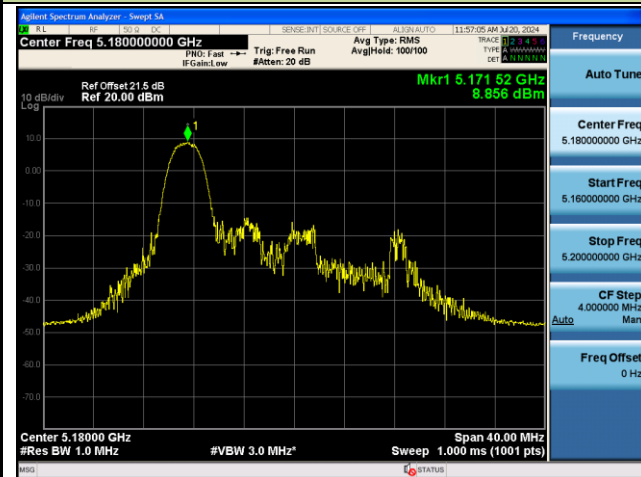


26 Tone_RU8_CH64 (5320MHz)

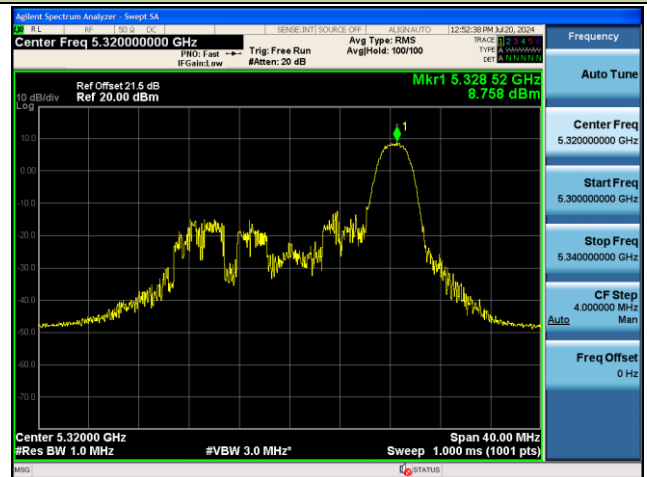

26 Tone_RU0_CH100 (5500MHz)

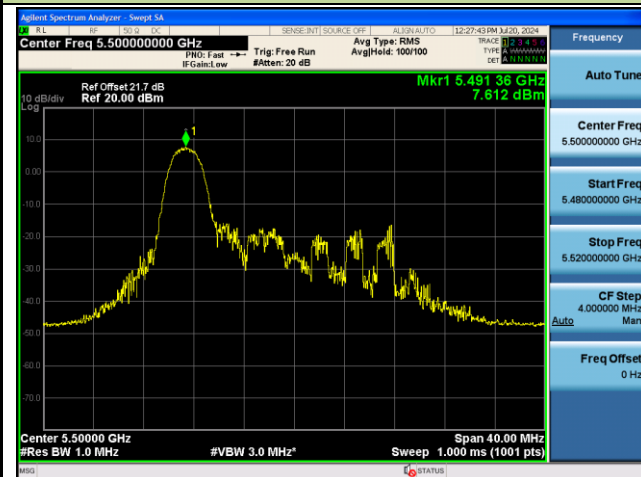


26 Tone_RU8_CH140 (5700MHz)

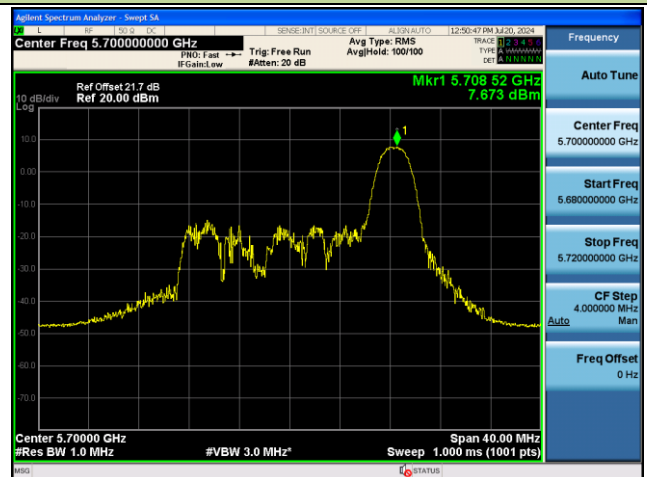

26 Tone_RU0_CH149 (5745MHz)




26 Tone_RU8_CH165 (5825MHz)

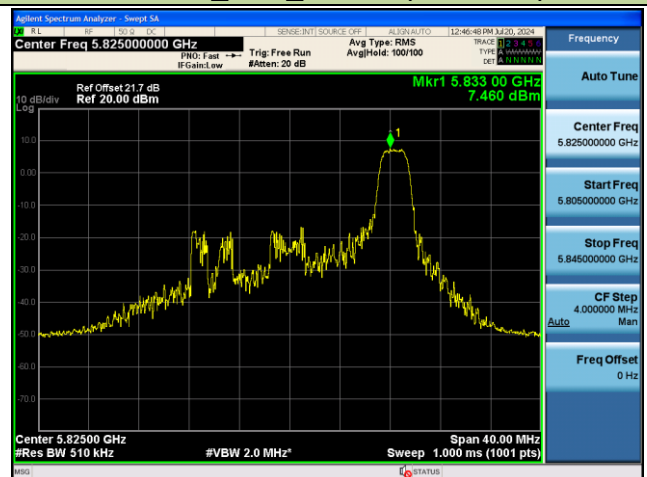


802.11ax-HE20 Power Spectral Density - Ant 1


52 Tone_RU74_CH36 (5180MHz)

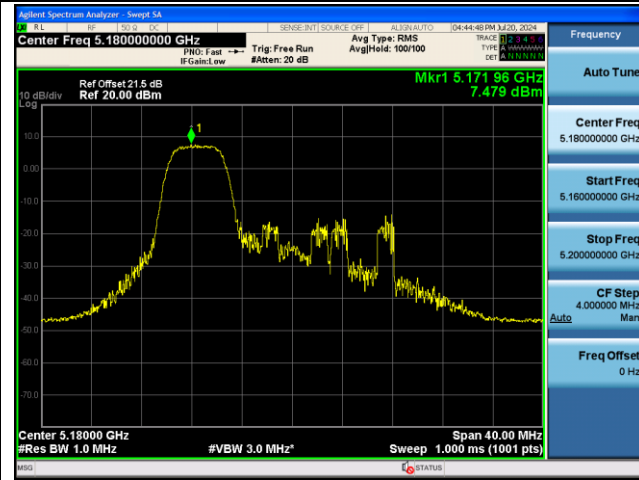


52 Tone_RU77_CH64 (5320MHz)

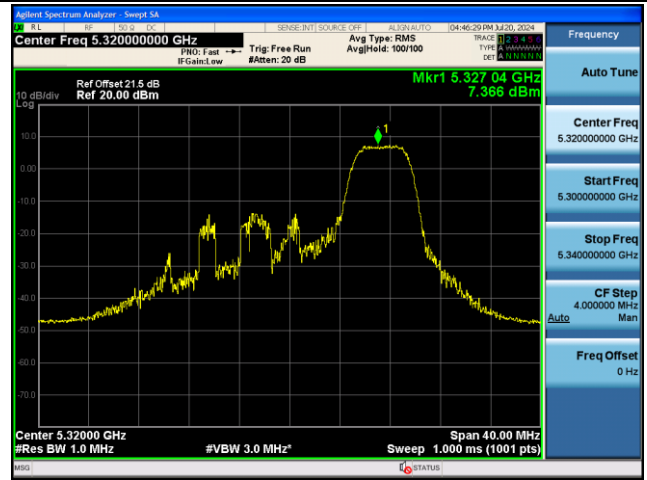

52 Tone_RU74_CH100 (5500MHz)

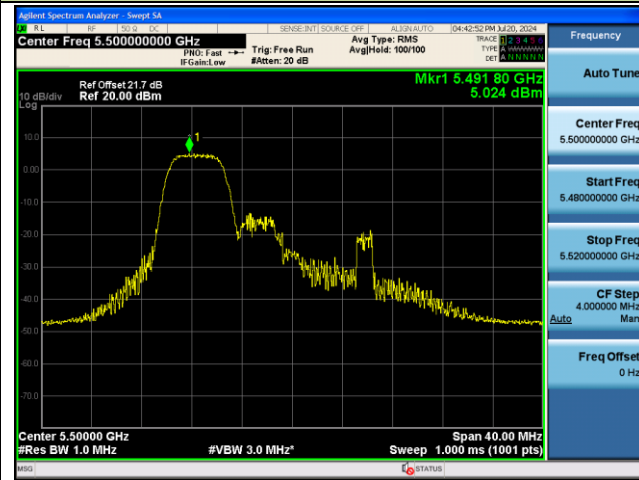


52 Tone_RU77_CH140 (5700MHz)

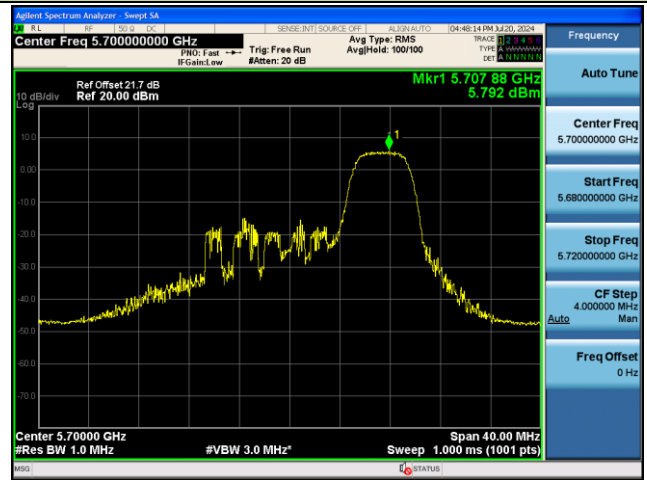

52 Tone_RU74_CH149 (5745MHz)




52 Tone_RU77_CH165 (5825MHz)

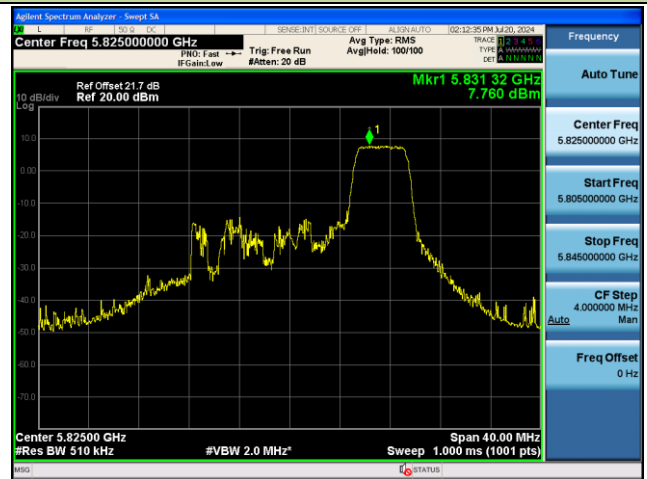


802.11ax-HE20 Power Spectral Density - Ant 1


106 Tone_RU106_CH36 (5180MHz)

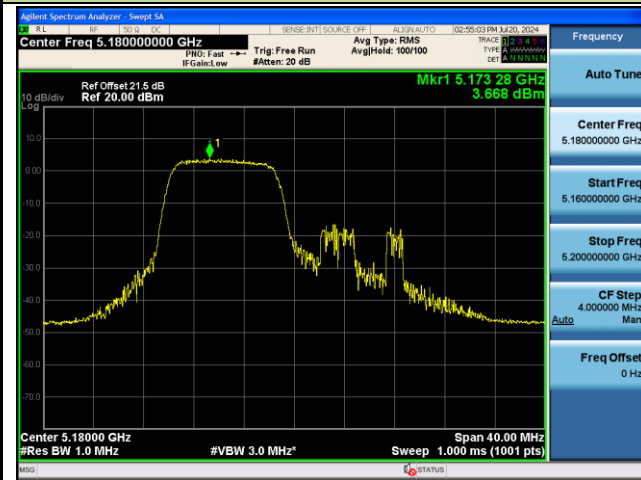


106 Tone_RU107_CH64 (5320MHz)

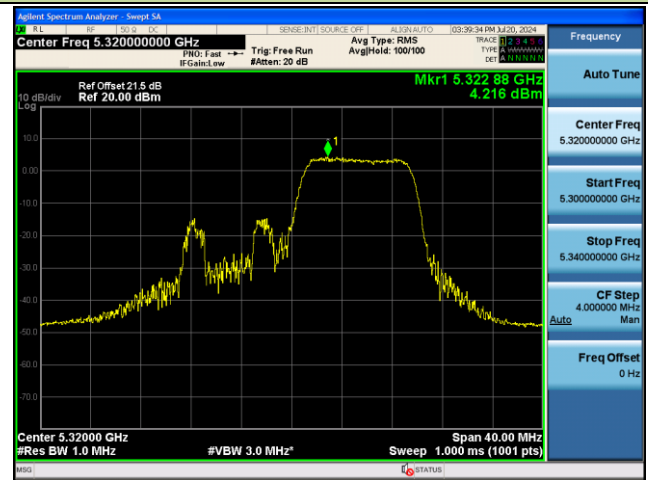


106 Tone_RU106_CH100 (5500MHz)

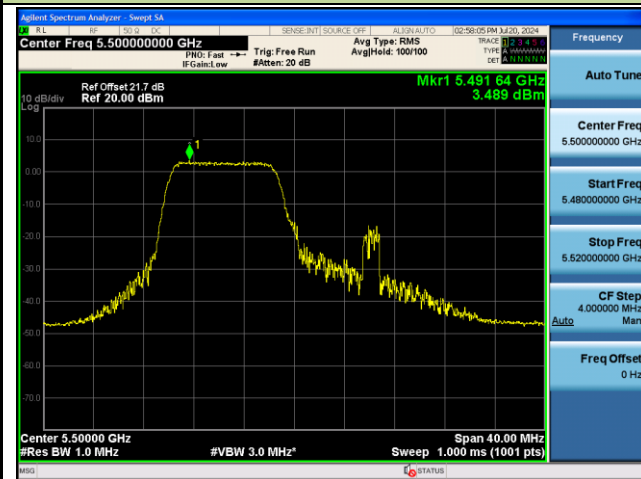

106 Tone_RU107_CH140 (5700MHz)

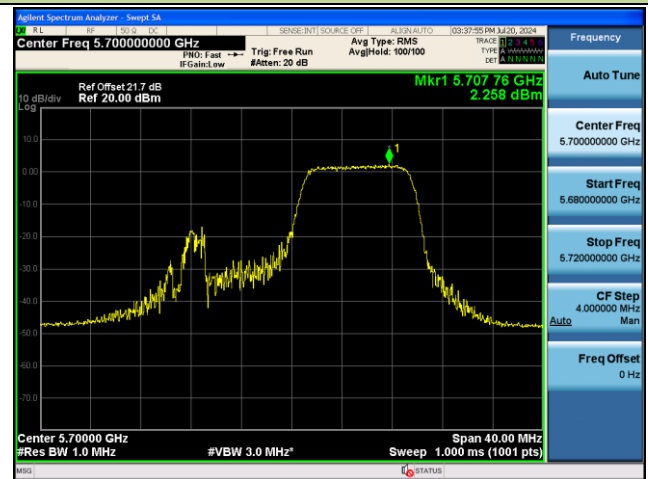

106 Tone_RU106_CH149 (5745MHz)

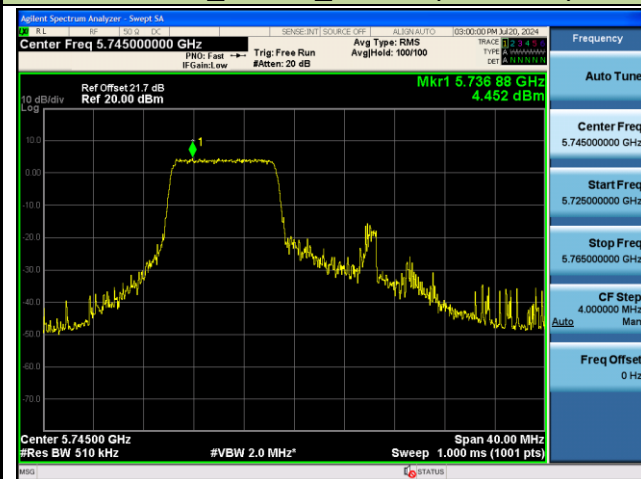


106 Tone_RU107_CH165 (5825MHz)




802.11ax-HE20 Power Spectral Density - Ant 1


242 Tone_RU122_CH36 (5180MHz)

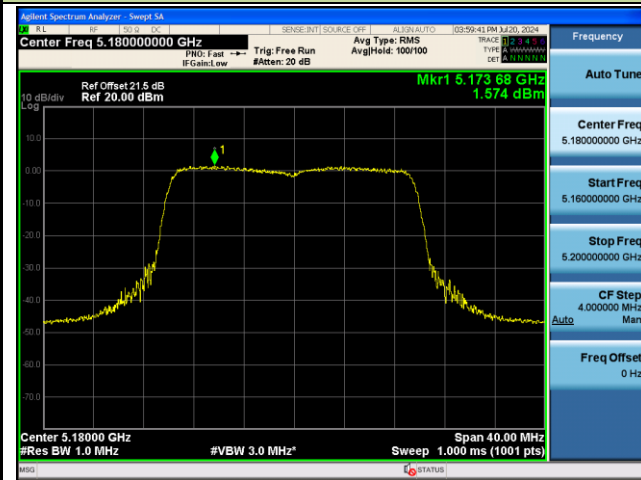


242 Tone_RU122_CH64 (5320MHz)

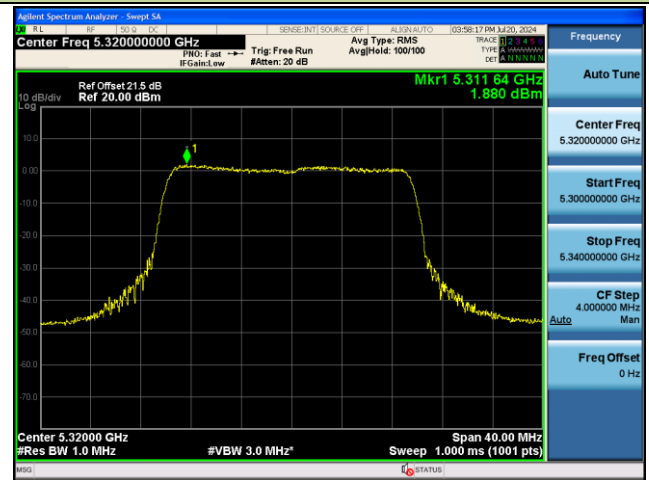


242 Tone_RU122_CH100 (5500MHz)

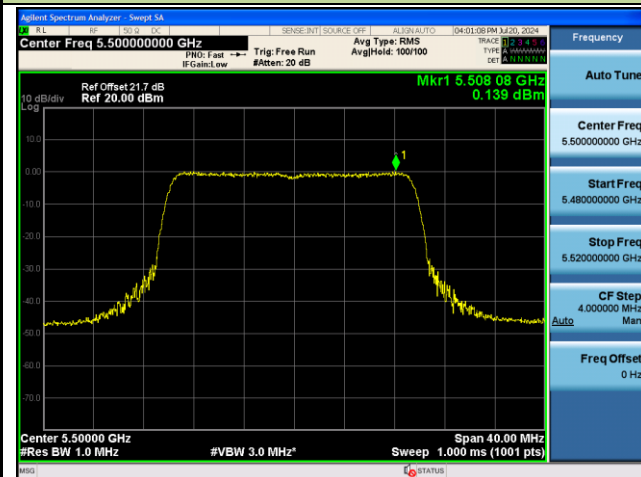


242 Tone_RU122_CH140 (5700MHz)

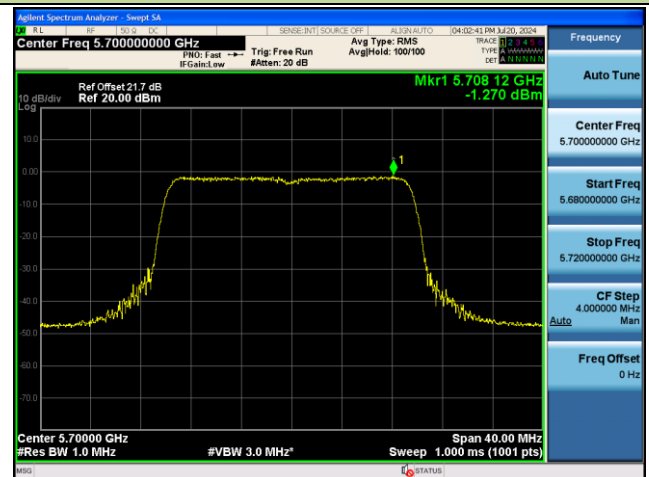

242 Tone_RU122_CH149 (5745MHz)

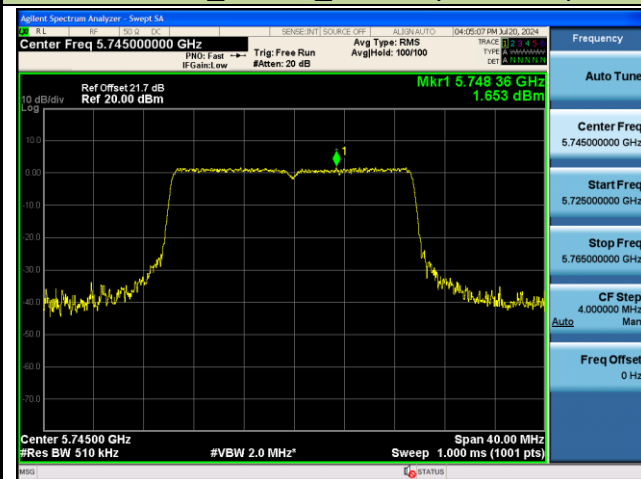

242 Tone_RU122_CH165 (5825MHz)

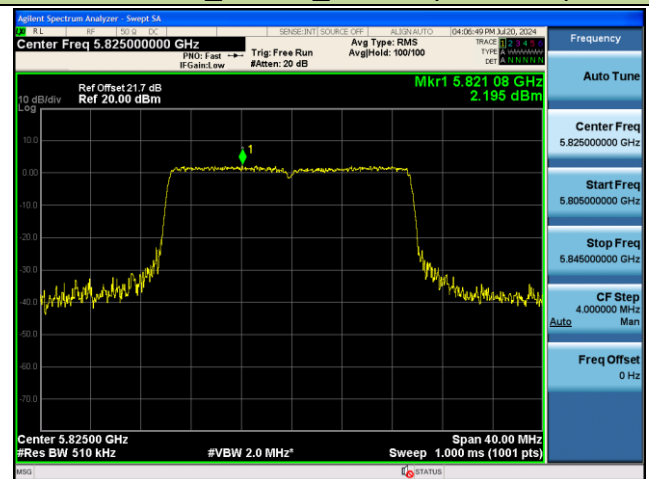

7.7. Frequency Stability Measurement

7.7.1. Test Limit

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

7.7.2. Test Limit

Frequency Stability Under Temperature Variations:


The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to highest. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C decreased per stage until the lowest temperature reached.

Frequency Stability Under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.

7.7.3. Test Setup

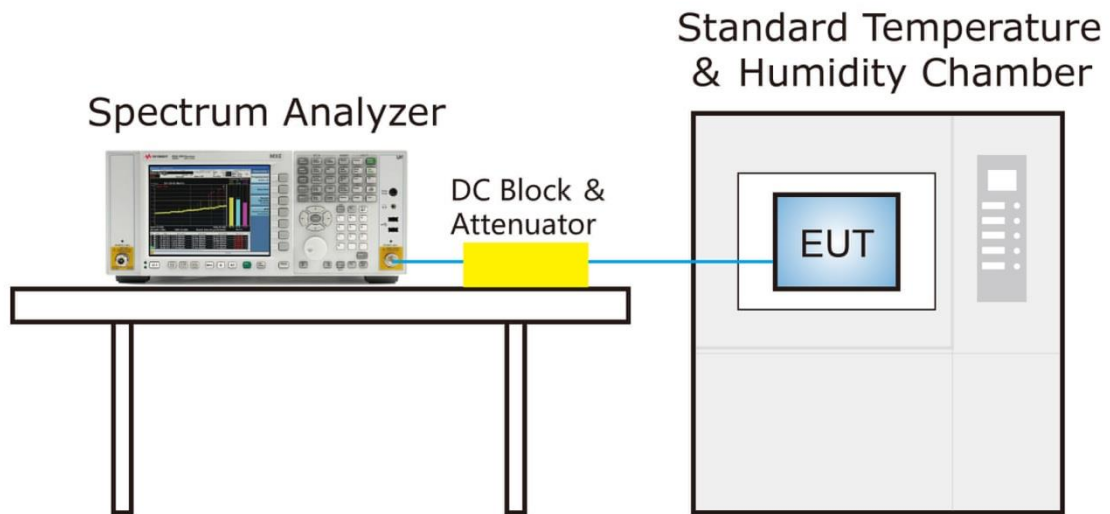

7.7.4. Test Result

Grantee ensure that the product meets e-CFR Title 47 section 15.407(g) and KDB 789033 D02v02r01 frequency stability such that the emissions are maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

7.8. Radiated Spurious Emission Measurement

7.8.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.8.2. Test Procedure Used

KDB 789033 D02v02r01- Section G

7.8.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
>1000 MHz	1 MHz

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.
If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

7.8.4. Test Setup

Below 1GHz Test Setup:

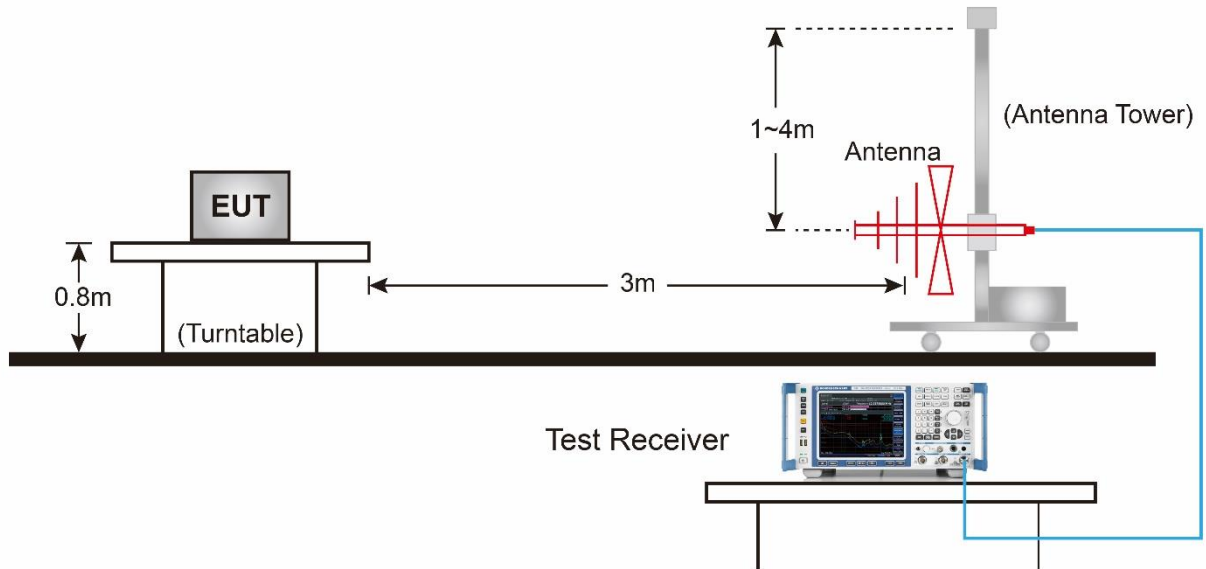


Above 1GHz Test Setup:

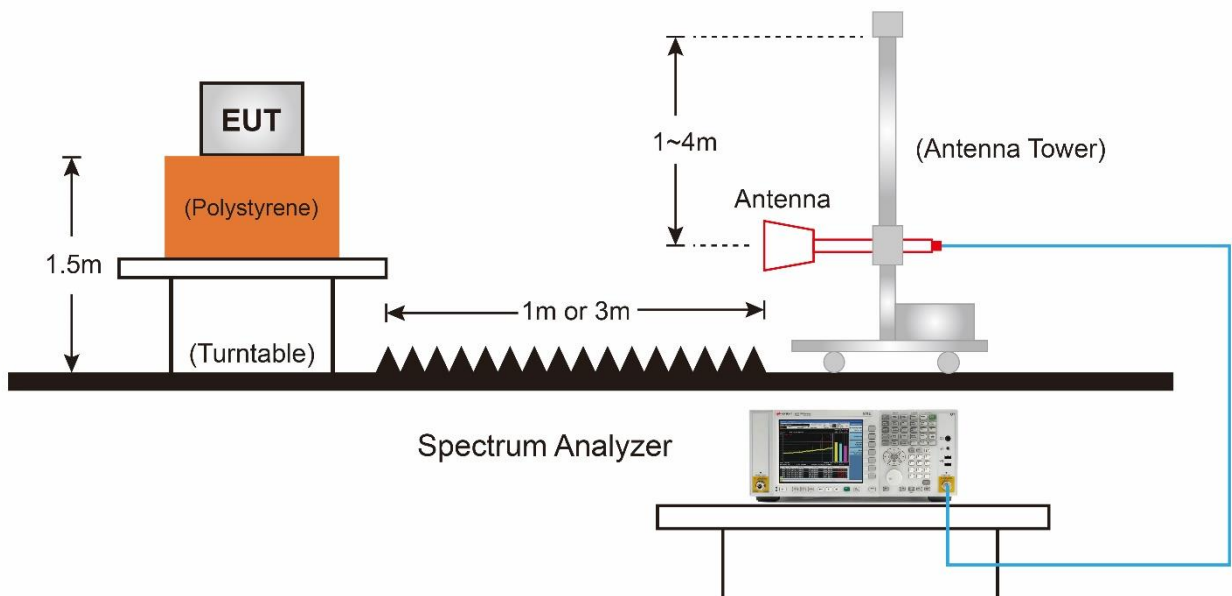

7.8.5. Test Result

EUT	Mobile Computer	Date of Test	2024-07-21
Factor	VULB 9162	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac-20MHz_Band1_TX_CH 36 ANT 0+1	Test Voltage	By Notebook PC

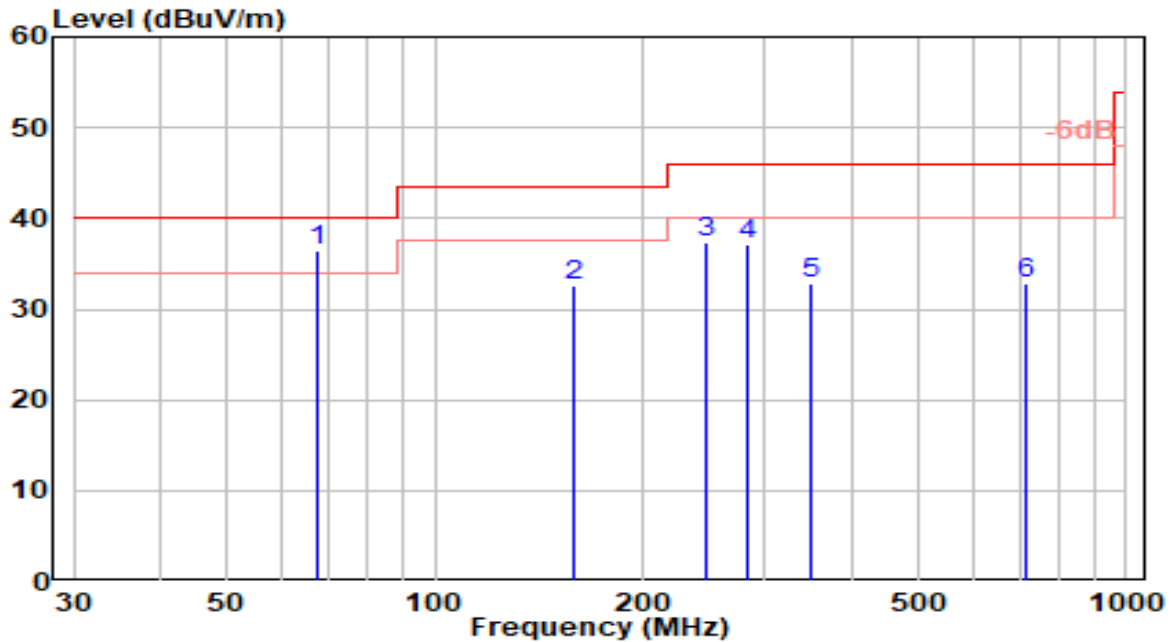


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	67.580	20.08	16.48	36.56	-3.44	40.00	286	210	QP
2		158.930	17.15	15.44	32.59	-10.91	43.50	200	144	QP
3		247.410	17.65	19.76	37.41	-8.59	46.00	100	160	QP
4		283.150	16.93	20.23	37.16	-8.84	46.00	100	220	QP
5		349.490	10.35	22.45	32.79	-13.21	46.00	100	25	QP
6		719.300	4.32	28.45	32.77	-13.23	46.00	100	250	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. The amplitude of radiated emissions (frequency range from 9kHz to 30MHz) is that proximity to ambient noise, which also are attenuated more than 20dB below the permissible value. Therefore, the data is not presented in the report.

EUT	Mobile Computer	Date of Test	2024-07-21
Factor	VULB 9162	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac-20MHz_Band1_TX_CH 36 ANT 0+1	Test Voltage	By Notebook PC

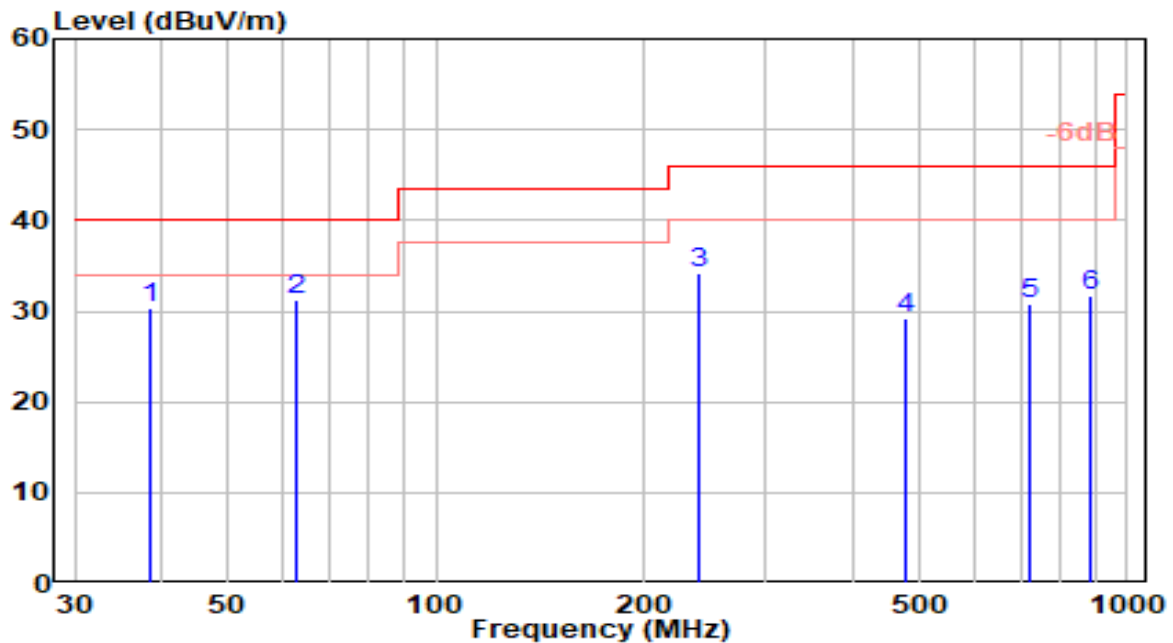


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		38.480	11.17	19.15	30.33	-9.67	40.00	100	10	QP
2	*	62.900	13.10	18.18	31.28	-8.72	40.00	200	330	QP
3		239.650	14.73	19.36	34.09	-11.91	46.00	200	180	QP
4		477.150	4.67	24.46	29.14	-16.86	46.00	158	10	QP
5		721.000	2.37	28.49	30.86	-15.14	46.00	100	330	QP
6		886.140	1.09	30.67	31.75	-14.25	46.00	200	60	QP

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.
- The amplitude of radiated emissions (frequency range from 9kHz to 30MHz) is that proximity to ambient noise, which also are attenuated more than 20dB below the permissible value. Therefore, the data is not presented in the report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11a_Band1_TX_CH 36 ANT 0+1	Test Voltage	By Notebook PC

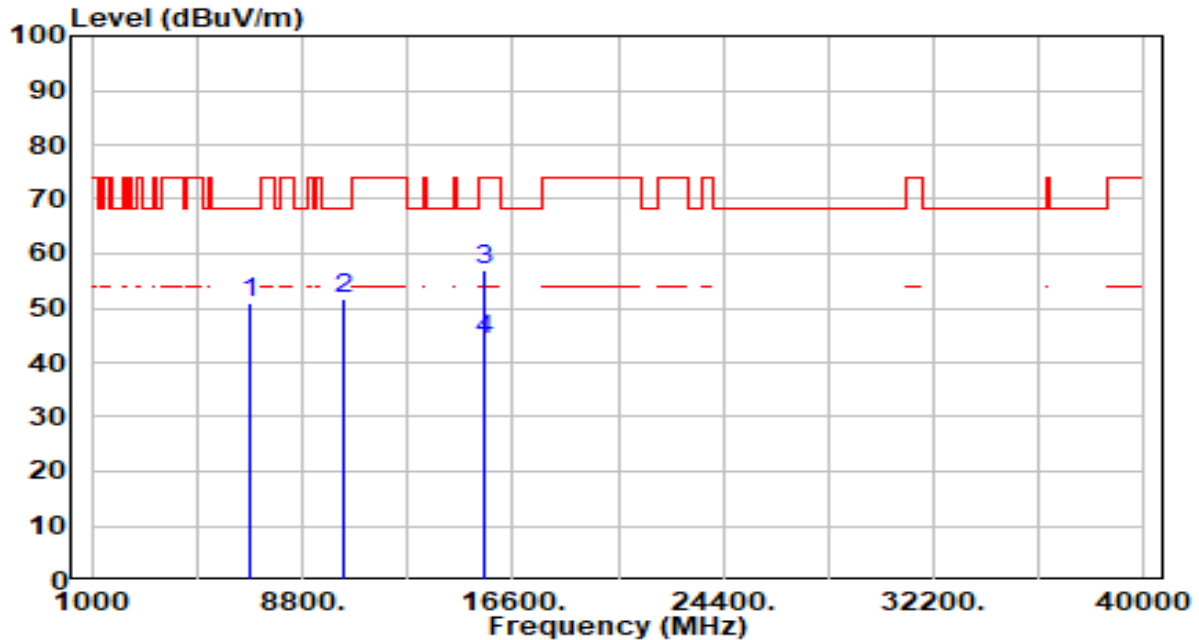


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		6907.000	45.61	5.39	51.00	-17.20	68.20	100	253	Peak
2	*	10360.000	46.72	4.87	51.59	-16.61	68.20	100	360	Peak
3		15540.000	50.66	6.21	56.87	-17.13	74.00	300	65	Peak
4	*	15540.000	38.10	6.21	44.31	-9.69	54.00	300	65	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11a_Band1_TX_CH 36 ANT 0+1	Test Voltage	By Notebook PC

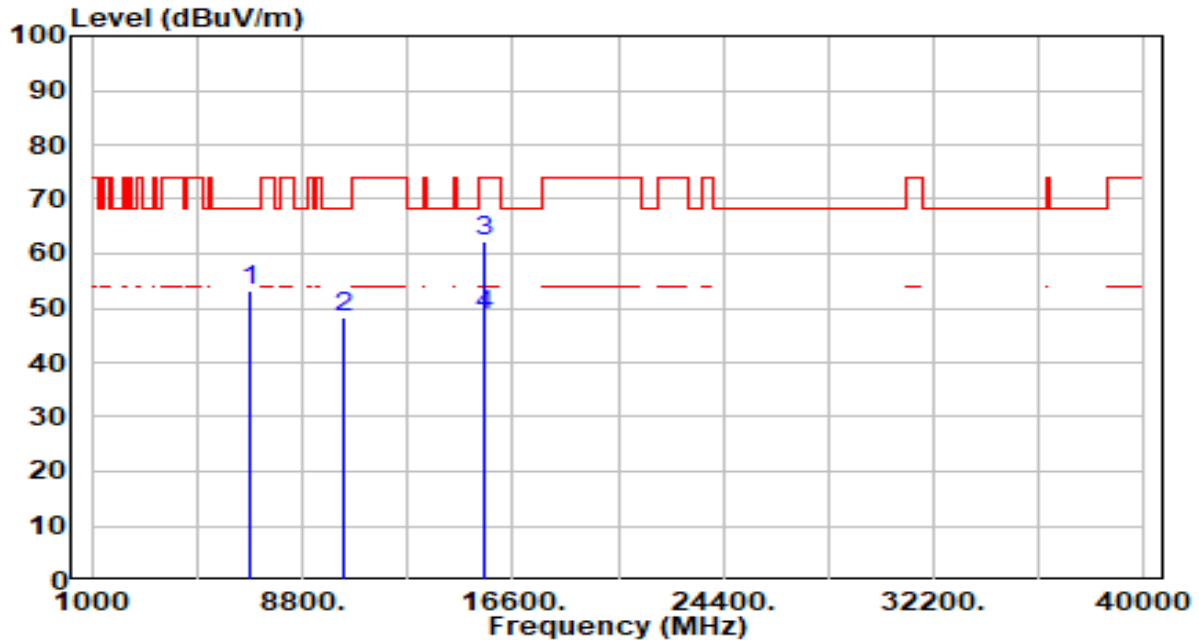


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	6907.000	47.96	5.39	53.35	-14.85	68.20	100	236	Peak
2	10360.000	43.41	4.87	48.28	-19.92	68.20	116	360	Peak
3	* 15540.000	56.11	6.21	62.32	-11.68	74.00	100	33	Peak
4	* 15540.000	42.40	6.21	48.61	-5.39	54.00	100	33	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11a_Band1_TX_CH 40 ANT 0+1	Test Voltage	By Notebook PC

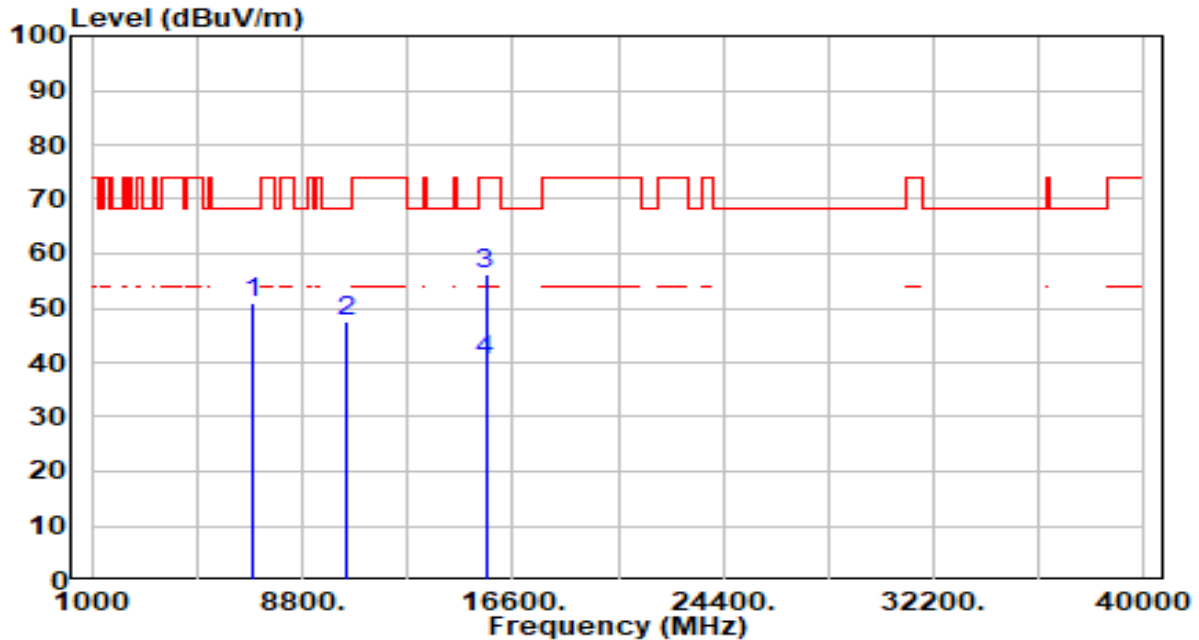


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	6933.000	45.71	5.39	51.10	-17.10	68.20	100	254	Peak
2		10400.000	42.86	4.82	47.67	-20.53	68.20	100	4	Peak
3		15600.000	50.10	6.15	56.25	-17.75	74.00	100	84	Peak
4	*	15600.000	34.30	6.15	40.45	-13.55	54.00	100	84	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11a_Band1_TX_CH 40 ANT 0+1	Test Voltage	By Notebook PC

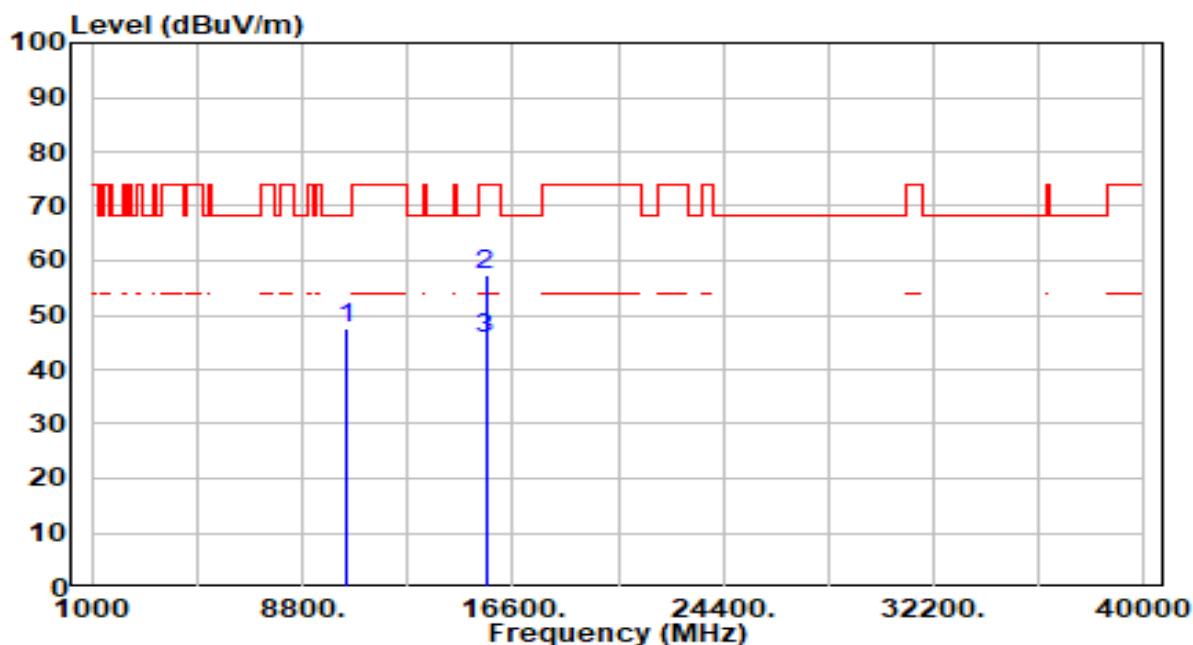


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		10400.000	42.78	4.82	47.60	-20.60	68.20	119	360	Peak
2	*	15600.000	51.03	6.15	57.18	-16.82	74.00	200	83	Peak
3	*	15600.000	39.50	6.15	45.65	-8.35	54.00	200	83	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11a_Band1_TX_CH 48 ANT 0+1	Test Voltage	By Notebook PC

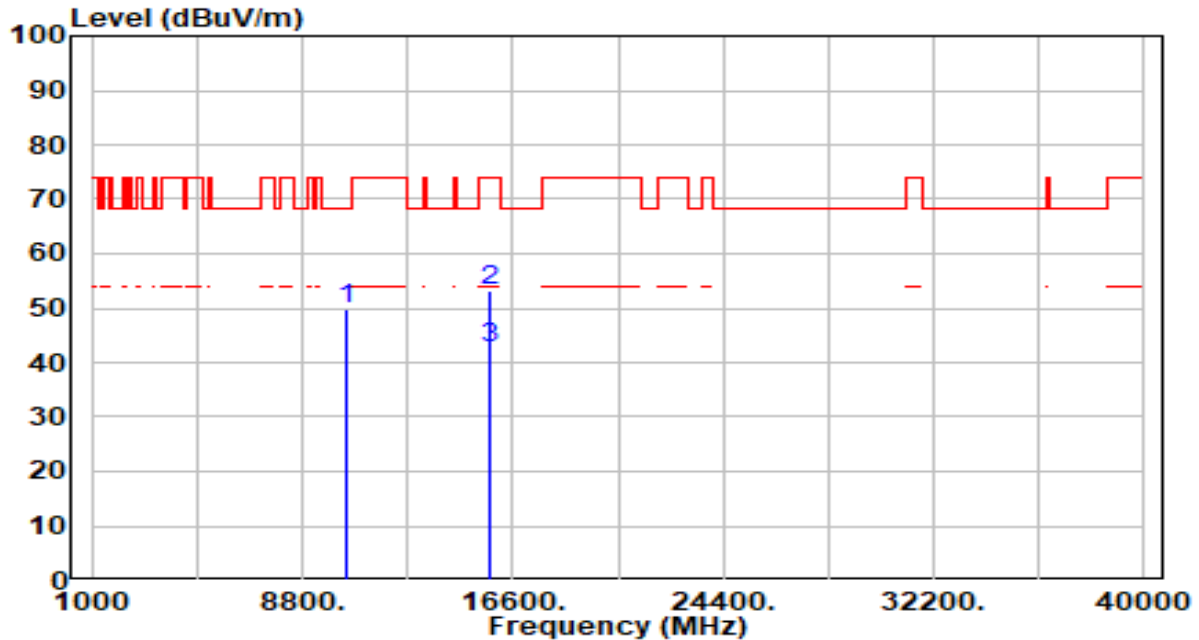


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10480.000	45.04	4.71	49.75	-18.45	68.20	200	33	Peak
2		15720.000	46.85	6.39	53.24	-20.76	74.00	100	75	Peak
3	*	15720.000	36.35	6.39	42.74	-11.26	54.00	100	75	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11a_Band1_TX_CH 48 ANT 0+1	Test Voltage	By Notebook PC

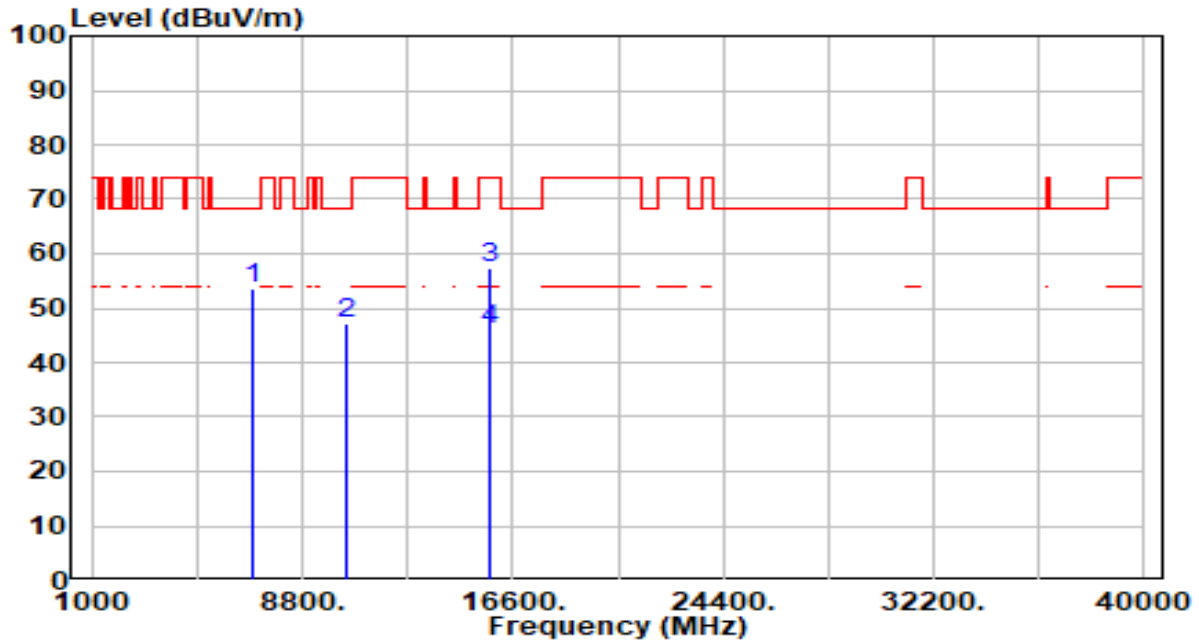


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	6987.000	48.08	5.40	53.48	-14.72	68.20	100	222	Peak
2		10480.000	42.51	4.71	47.22	-20.98	68.20	100	360	Peak
3		15720.000	51.00	6.39	57.39	-16.61	74.00	100	41	Peak
4	*	15720.000	39.50	6.39	45.89	-8.11	54.00	100	41	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11a_Band2_TX_CH 52 ANT 0+1	Test Voltage	By Notebook PC

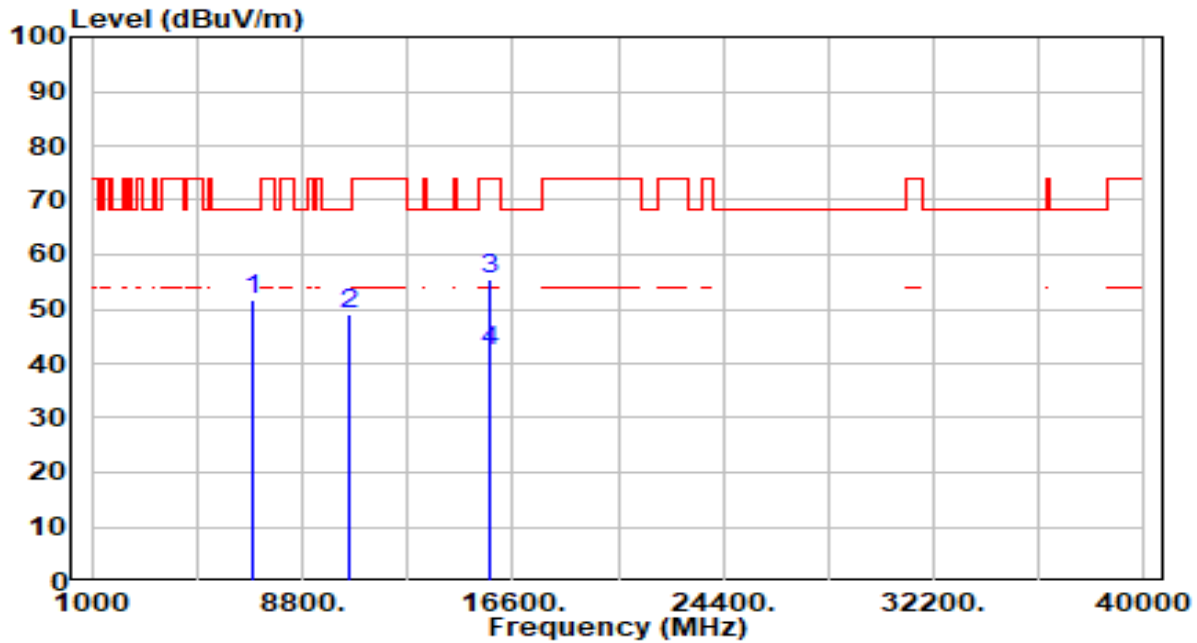


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	7013.000	46.41	5.41	51.81	-16.39	68.20	100	248	Peak
2		10520.000	44.23	4.67	48.90	-19.30	68.20	168	0	Peak
3		15780.000	48.90	6.51	55.41	-18.59	74.00	200	91	Peak
4	*	15780.000	35.80	6.51	42.31	-11.69	54.00	200	91	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11a_Band2_TX_CH 52 ANT 0+1	Test Voltage	By Notebook PC

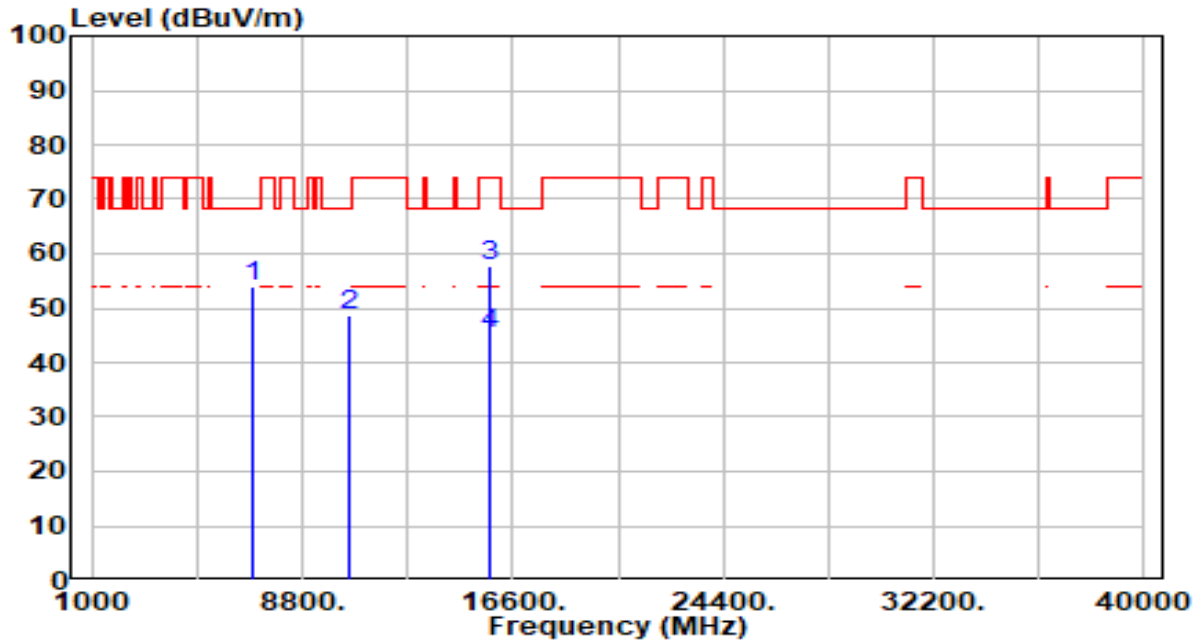


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	7013.000	48.51	5.41	53.92	-14.28	68.20	200	252	Peak
2		10520.000	43.92	4.67	48.59	-19.61	68.20	200	0	Peak
3		15780.000	51.30	6.51	57.81	-16.19	74.00	200	360	Peak
4	*	15780.000	38.60	6.51	45.11	-8.89	54.00	200	360	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11a_Band2_TX_CH 60 ANT 0+1	Test Voltage	By Notebook PC

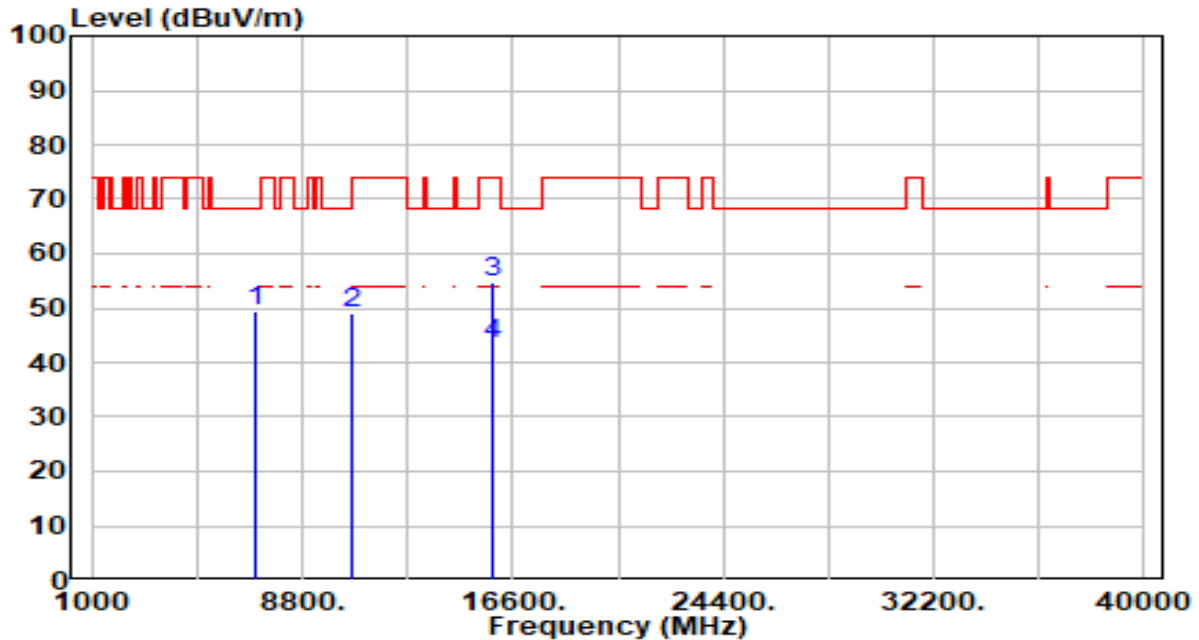


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	7066.000	43.82	5.44	49.26	-18.94	68.20	100	250	Peak
2		10600.000	44.51	4.61	49.12	-19.08	68.20	185	360	Peak
3		15900.000	48.32	6.55	54.87	-19.13	74.00	100	307	Peak
4	*	15900.000	36.70	6.55	43.25	-10.75	54.00	100	307	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11a_Band2_TX_CH 60 ANT 0+1	Test Voltage	By Notebook PC

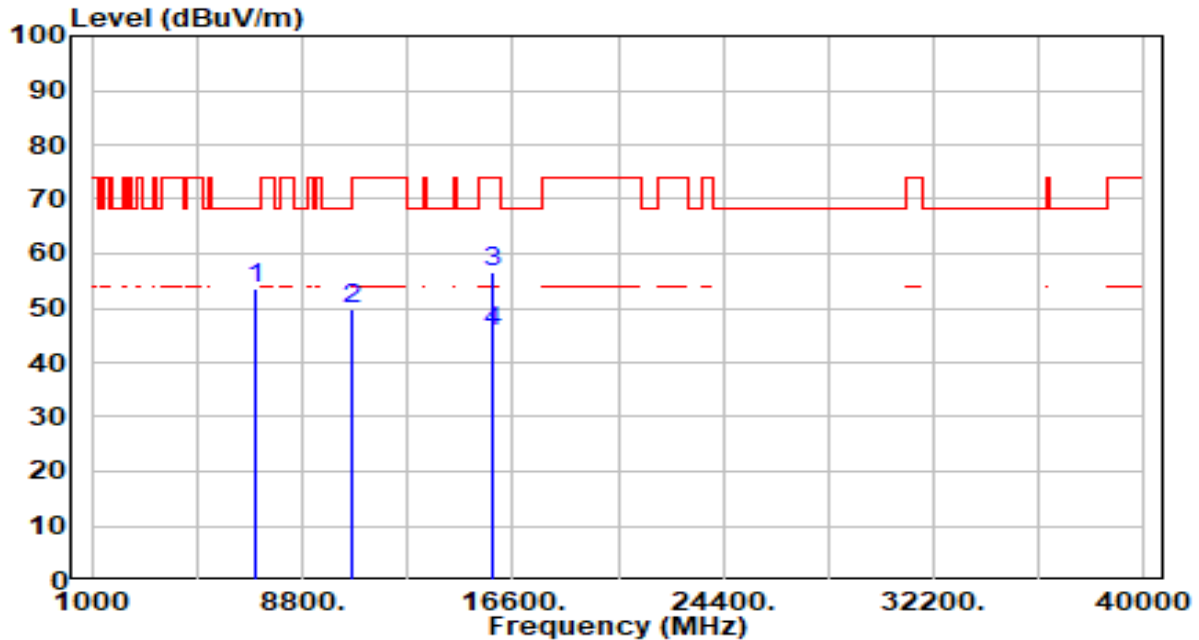


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	7067.000	48.30	5.44	53.74	-14.46	68.20	100	221	Peak
2		10600.000	45.16	4.61	49.77	-18.43	68.20	100	360	Peak
3		15900.000	50.10	6.55	56.65	-17.35	74.00	100	360	Peak
4	*	15900.000	39.10	6.55	45.65	-8.35	54.00	100	360	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11a_Band2_TX_CH 64 ANT 0+1	Test Voltage	By Notebook PC

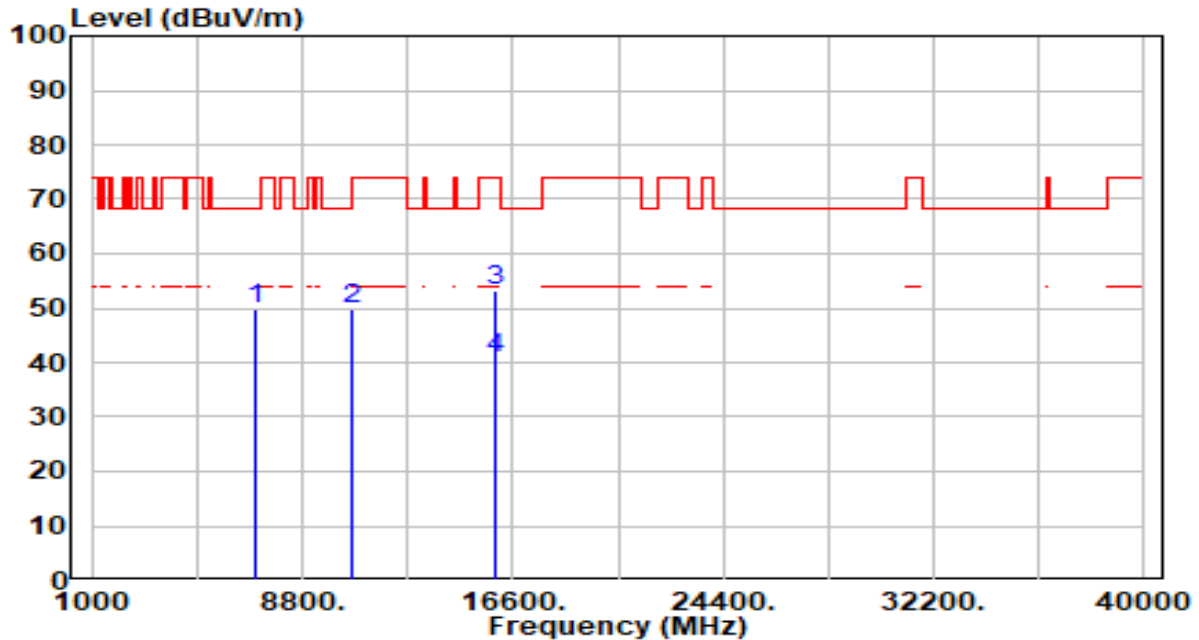


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	7093.000	44.41	5.46	49.87	-18.33	68.20	100	248	Peak
2		10640.000	45.36	4.62	49.98	-24.02	74.00	100	0	Peak
3		15960.000	46.53	6.55	53.08	-20.92	74.00	200	92	Peak
4	*	15960.000	34.30	6.55	40.85	-13.15	54.00	200	92	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11a_Band2_TX_CH 64 ANT 0+1	Test Voltage	By Notebook PC

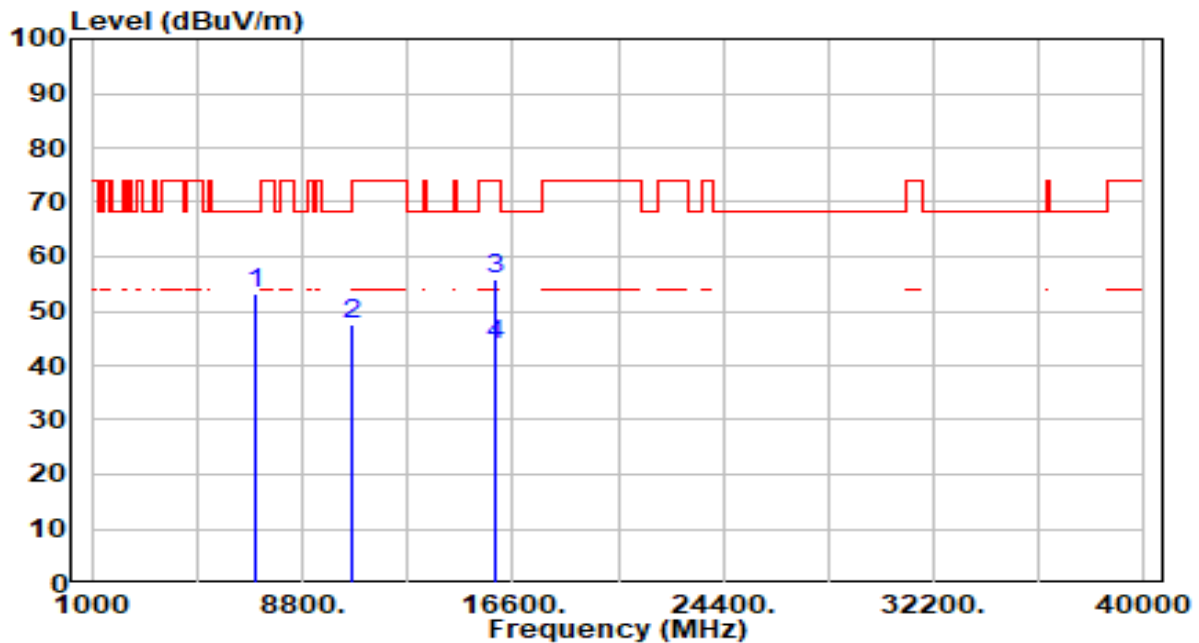


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	7093.000	47.62	5.46	53.08	-15.12	68.20	200	252	Peak
2		10640.000	42.93	4.62	47.56	-26.44	74.00	200	8	Peak
3		15960.000	49.20	6.55	55.75	-18.25	74.00	200	352	Peak
4	*	15960.000	37.40	6.55	43.95	-10.05	54.00	200	352	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11a_Band3_TX_CH 100 ANT 0+1	Test Voltage	By Notebook PC

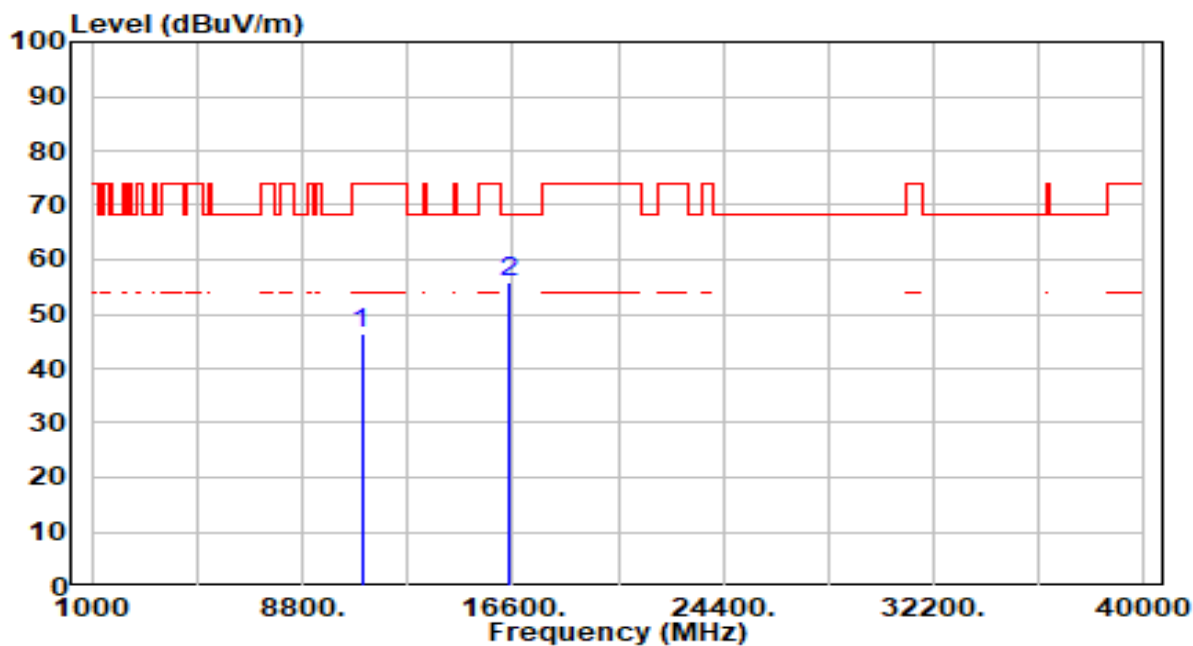


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11000.000	41.75	4.52	46.27	-27.73	74.00	200	338	Peak
2	*	16500.000	49.79	6.10	55.89	-12.31	68.20	200	327	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11a_Band3_TX_CH 100 ANT 0+1	Test Voltage	By Notebook PC

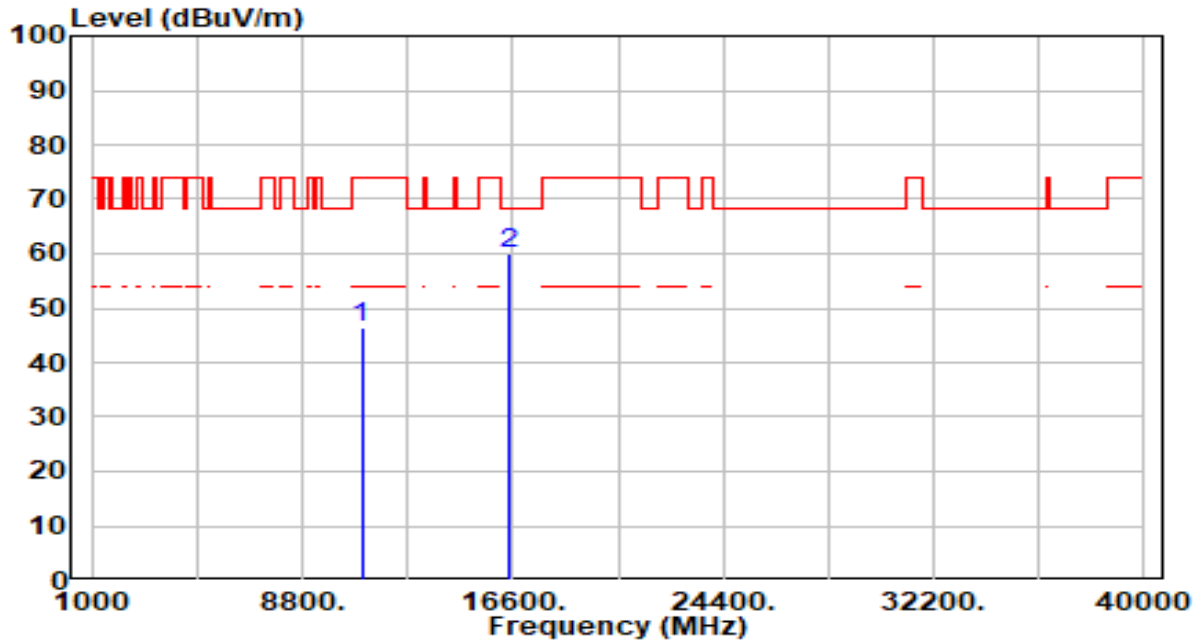


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11000.000	41.76	4.52	46.28	-27.72	74.00	200	24	Peak
2	*	16500.000	53.78	6.10	59.88	-8.32	68.20	200	320	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11a_Band3_TX_CH 116 ANT 0+1	Test Voltage	By Notebook PC

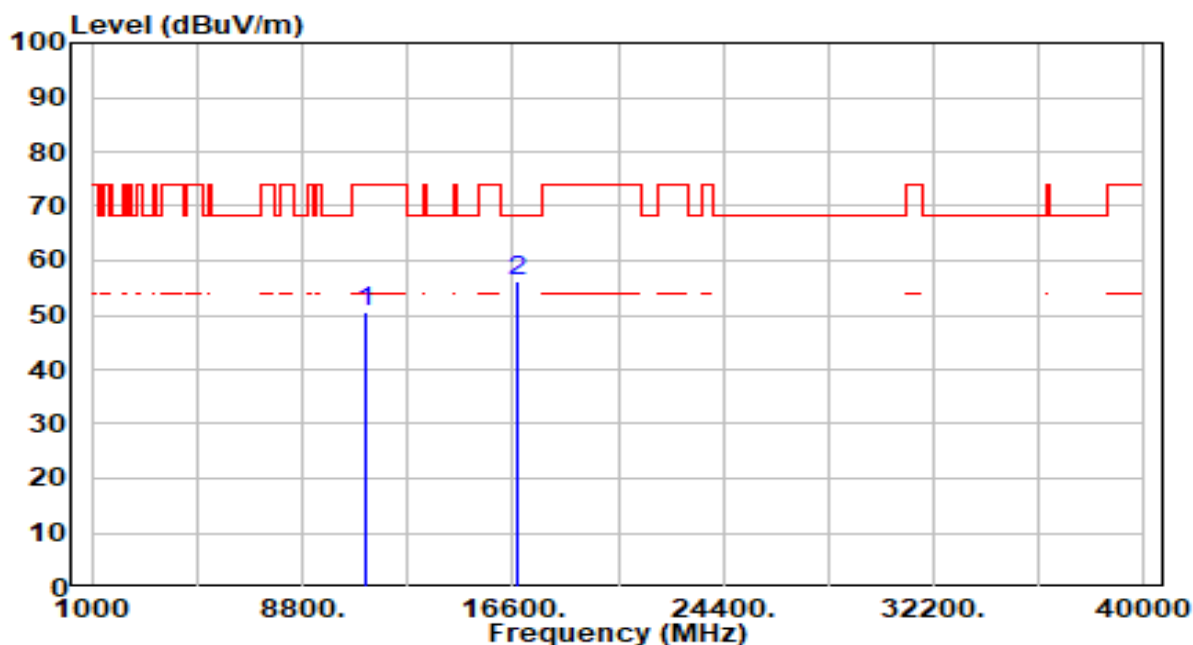


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11160.000	45.69	4.94	50.63	-23.37	74.00	200	29	Peak
2	*	16740.000	50.18	6.19	56.36	-11.84	68.20	200	323	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11a_Band3_TX_CH 116 ANT 0+1	Test Voltage	By Notebook PC

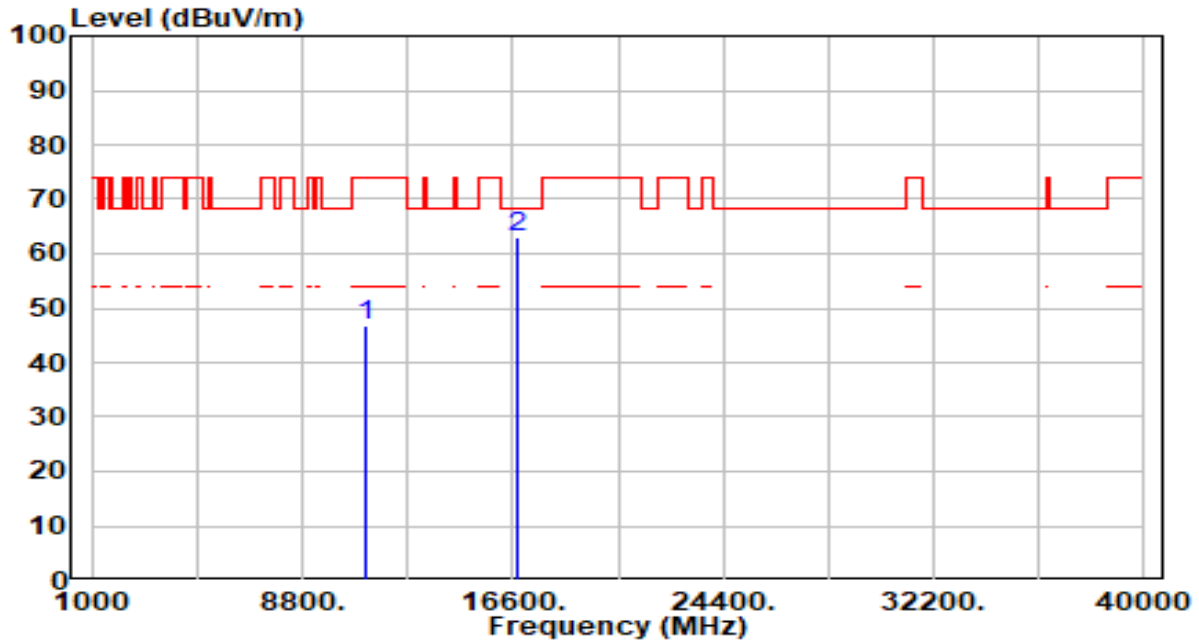


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11160.000	41.92	4.94	46.86	-27.14	74.00	200	264	Peak
2	*	16740.000	56.89	6.19	63.08	-5.12	68.20	100	20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11a_Band3_TX_CH 140 ANT 0+1	Test Voltage	By Notebook PC

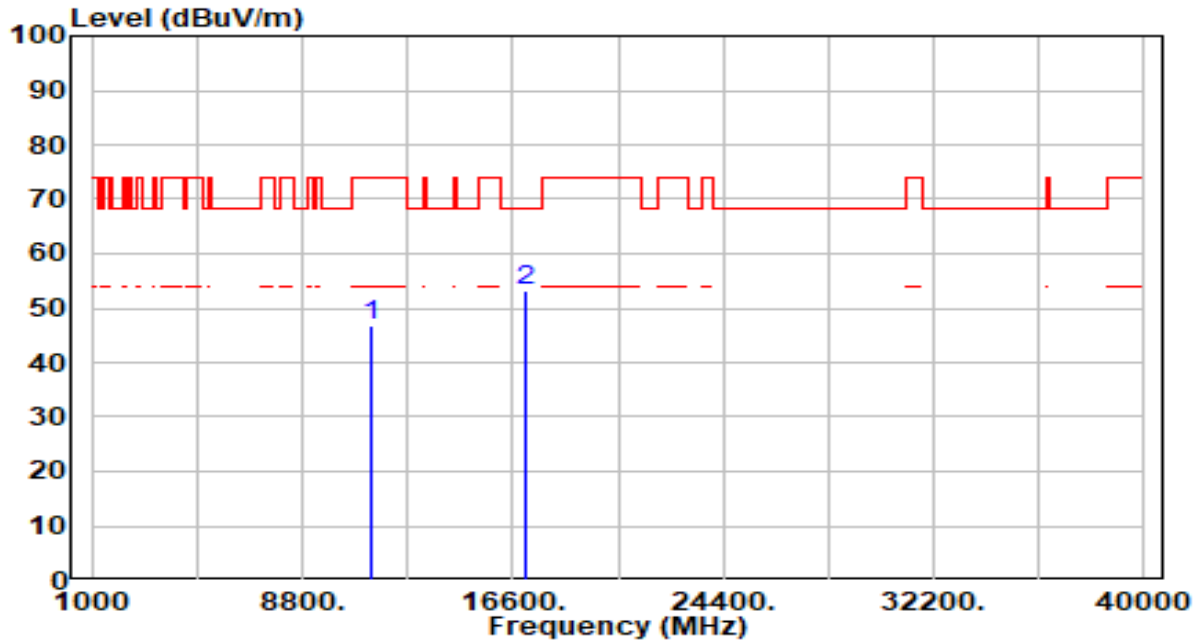


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11400.000	41.39	5.26	46.65	-27.35	74.00	200	338	Peak
2	*	17100.000	47.13	5.97	53.10	-15.10	68.20	200	18	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11a_Band3_TX_CH 140 ANT 0+1	Test Voltage	By Notebook PC

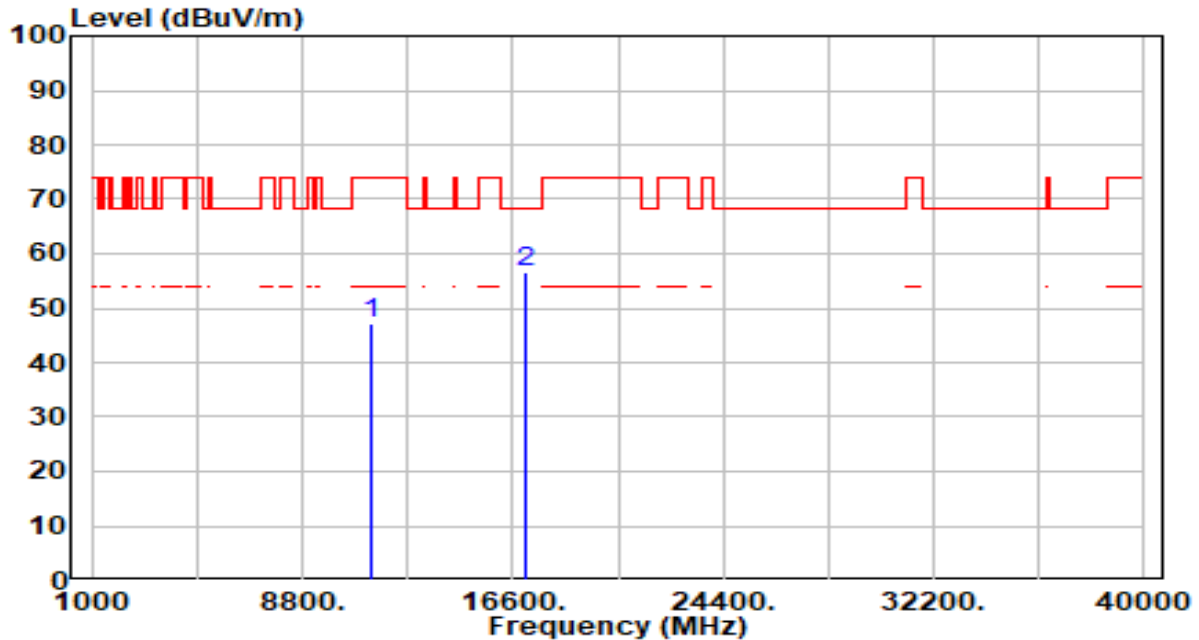


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11400.000	41.82	5.26	47.08	-26.92	74.00	200	24	Peak
2	*	17100.000	50.75	5.97	56.72	-11.48	68.20	200	354	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11a_Band3_TX_CH 144 ANT 0+1	Test Voltage	By Notebook PC

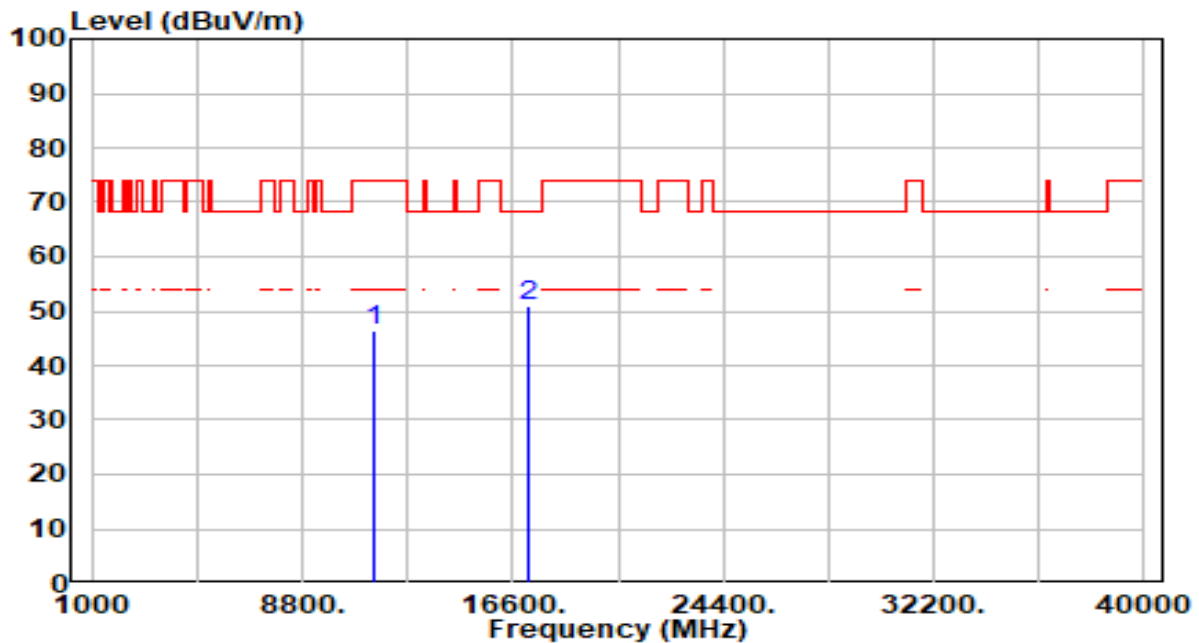


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11440.000	41.11	5.29	46.40	-27.60	74.00	200	43	Peak
2	*	17160.000	44.97	5.87	50.84	-17.36	68.20	200	20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11a_Band3_TX_CH 144 ANT 0+1	Test Voltage	By Notebook PC

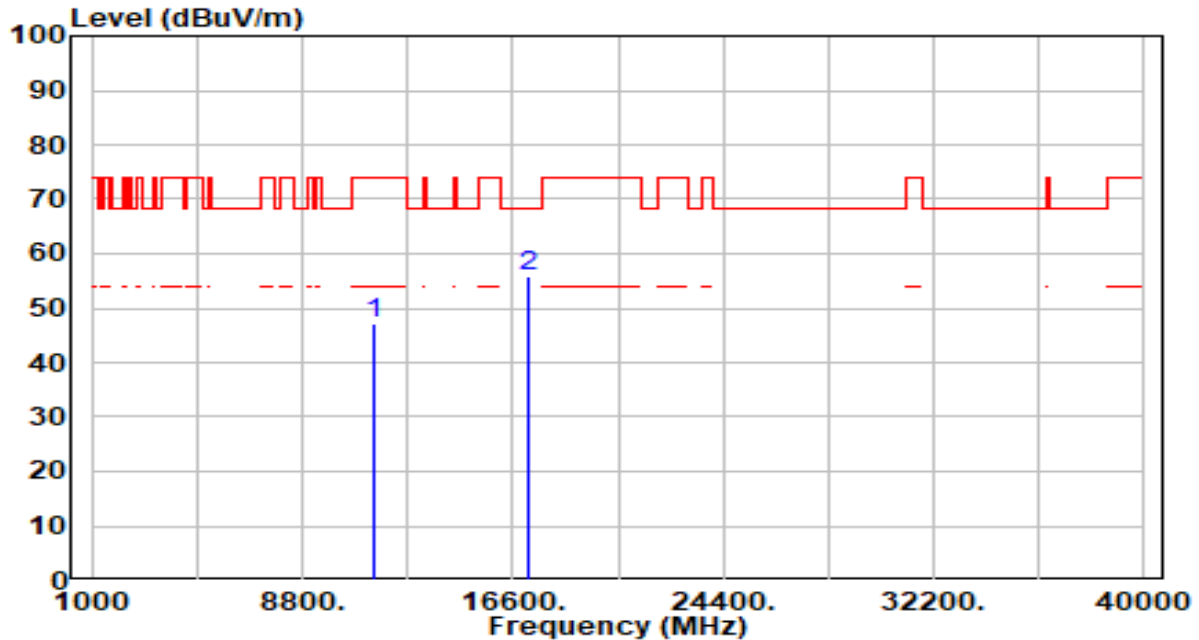


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11440.000	41.90	5.29	47.19	-26.81	74.00	200	200	Peak
2	*	17160.000	50.16	5.87	56.03	-12.17	68.20	200	1	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11a_Band4_TX_CH 149 ANT 0+1	Test Voltage	By Notebook PC

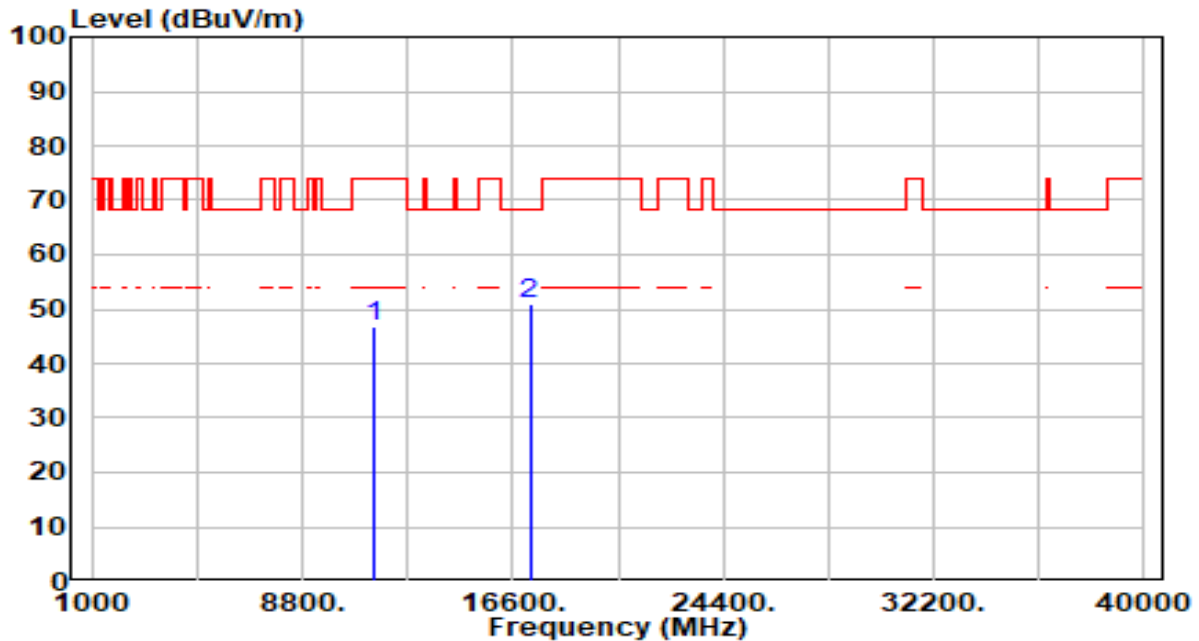


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11490.000	41.36	5.32	46.68	-27.32	74.00	100	10	Peak
2	*	17235.000	45.33	5.71	51.04	-17.16	68.20	200	17	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11a_Band4_TX_CH 149 ANT 0+1	Test Voltage	By Notebook PC

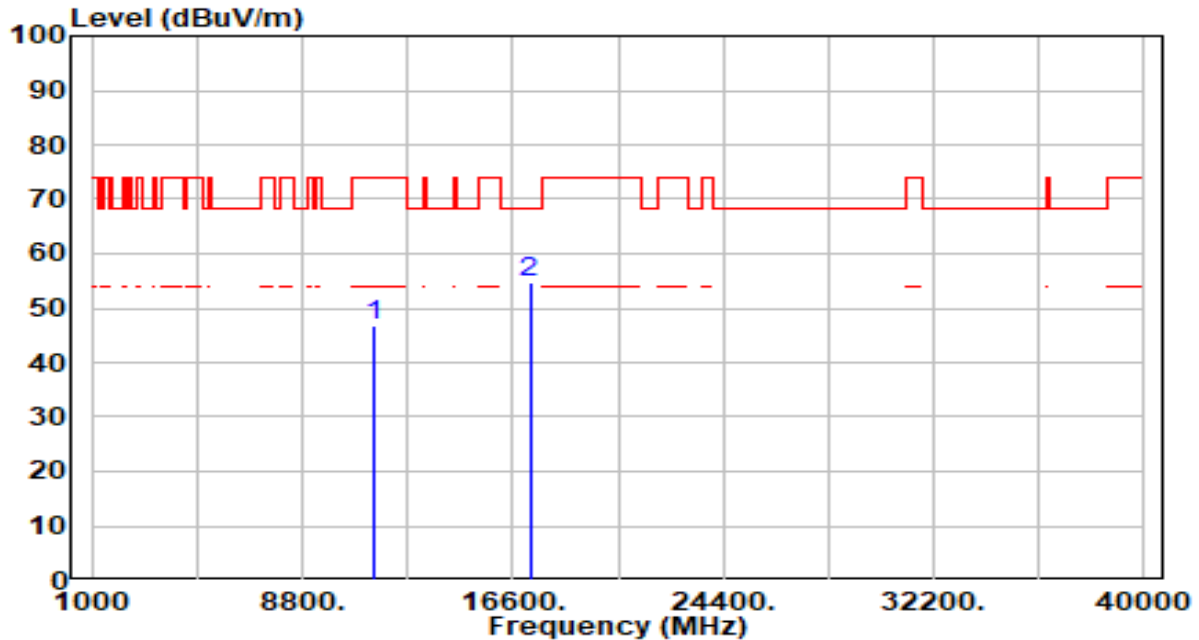


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11490.000	41.51	5.32	46.83	-27.17	74.00	200	148	Peak
2	*	17235.000	48.86	5.71	54.57	-13.63	68.20	200	346	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11a_Band4_TX_CH 157 ANT 0+1	Test Voltage	By Notebook PC

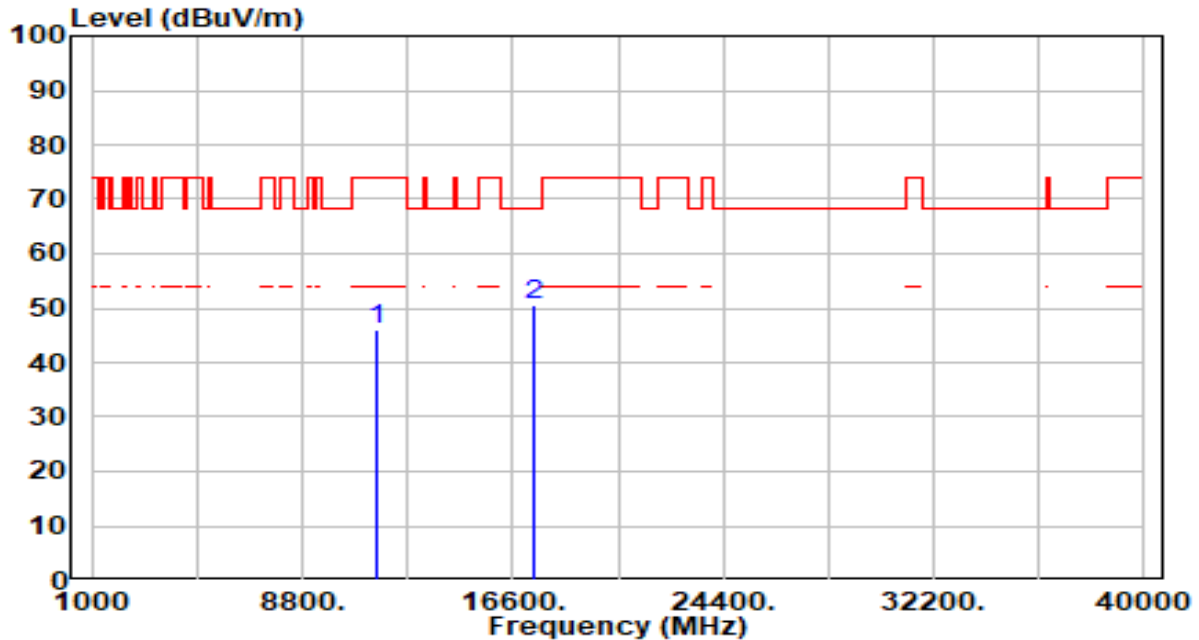


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11570.000	40.80	5.38	46.18	-27.82	74.00	200	39	Peak
2	*	17355.000	45.27	5.39	50.66	-17.54	68.20	200	17	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11a_Band4_TX_CH 157 ANT 0+1	Test Voltage	By Notebook PC

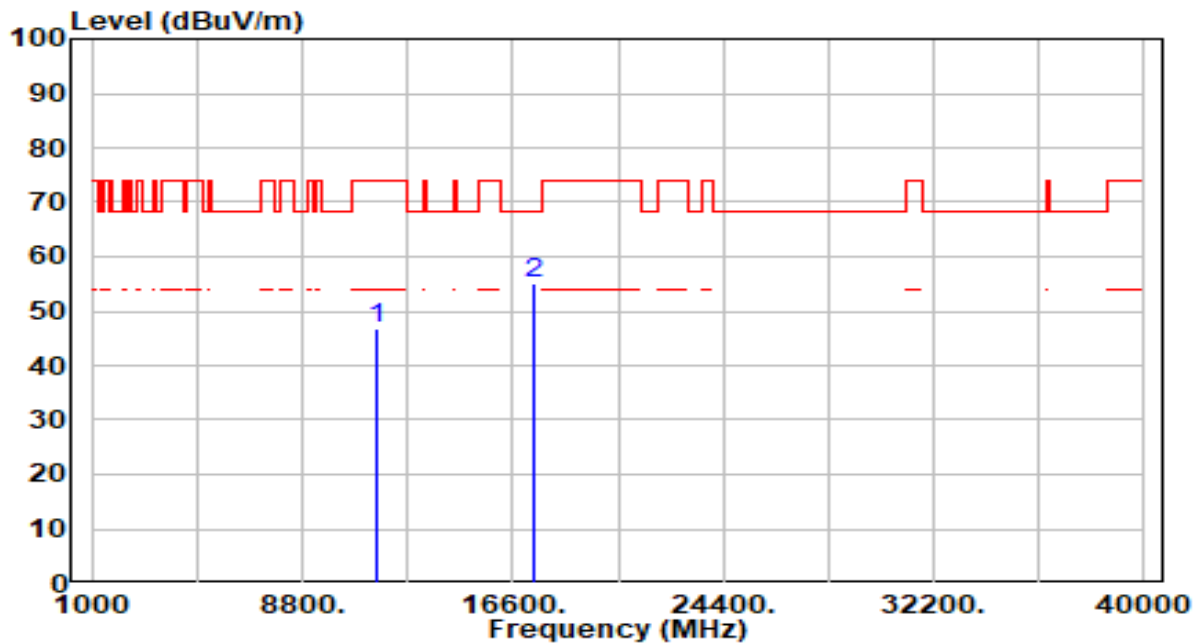


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11570.000	41.46	5.38	46.83	-27.17	74.00	200	283	Peak
2	*	17355.000	49.61	5.39	54.99	-13.21	68.20	200	345	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11a_Band4_TX_CH 165 ANT 0+1	Test Voltage	By Notebook PC

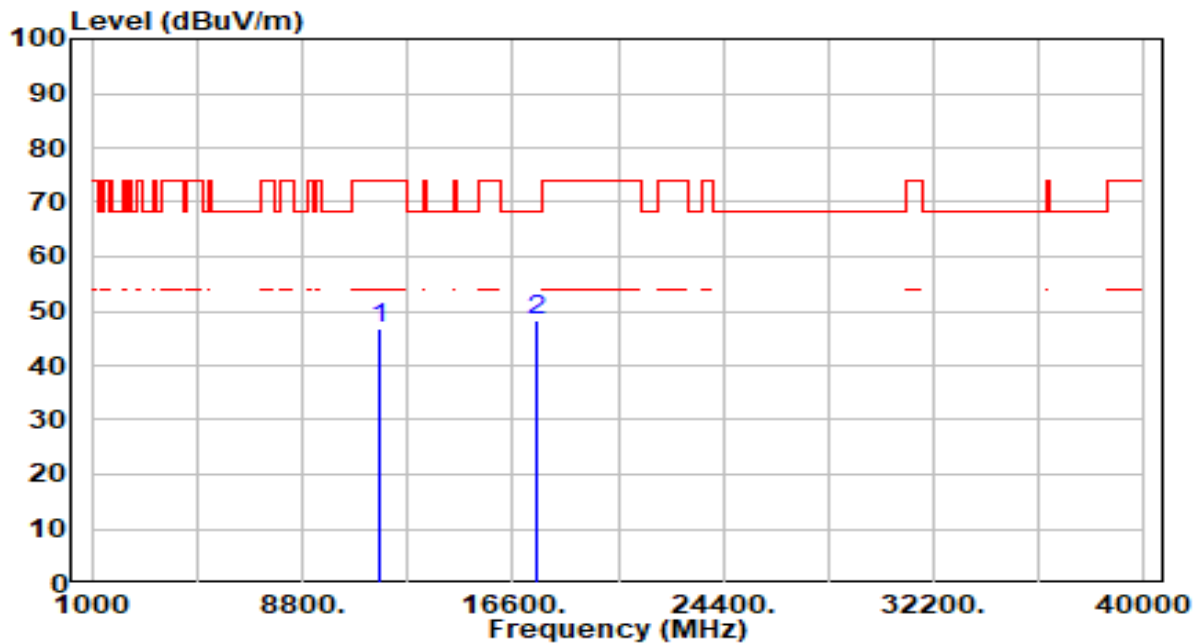


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11650.000	41.60	5.36	46.96	-27.04	74.00	200	212	Peak
2	*	17475.000	42.91	5.29	48.20	-20.00	68.20	200	309	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11a_Band4_TX_CH 165 ANT 0+1	Test Voltage	By Notebook PC

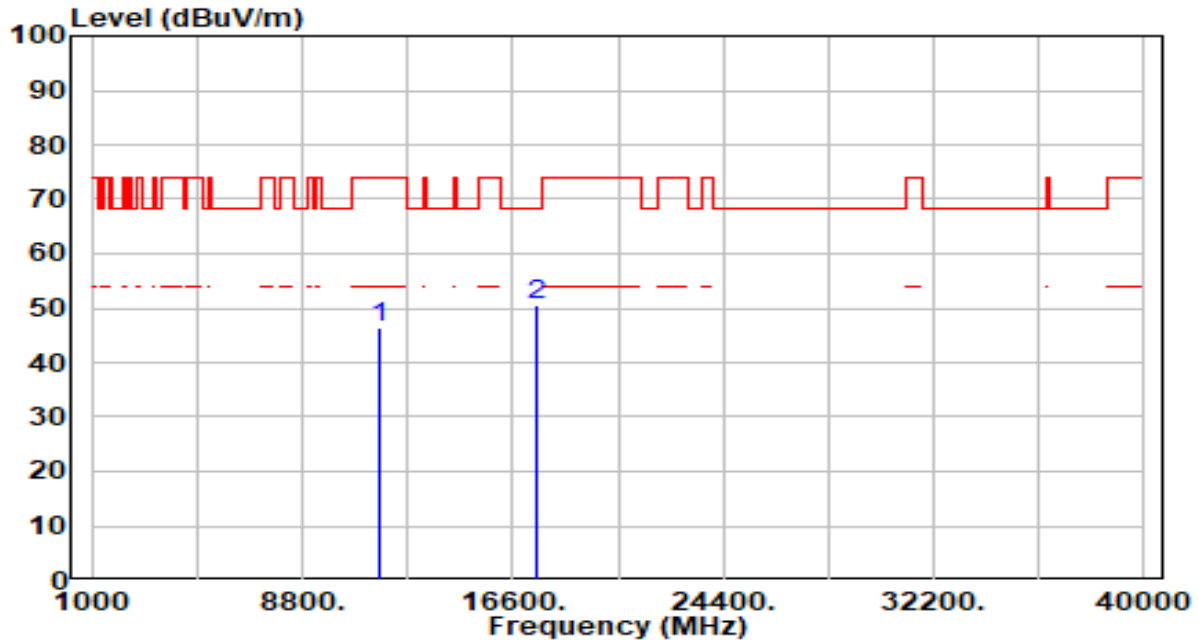


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11650.000	40.89	5.36	46.25	-27.75	74.00	200	15	Peak
2	*	17475.000	45.36	5.29	50.66	-17.54	68.20	200	325	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-20MHz_Band1_TX_CH 36 ANT 0+1	Test Voltage	By Notebook PC

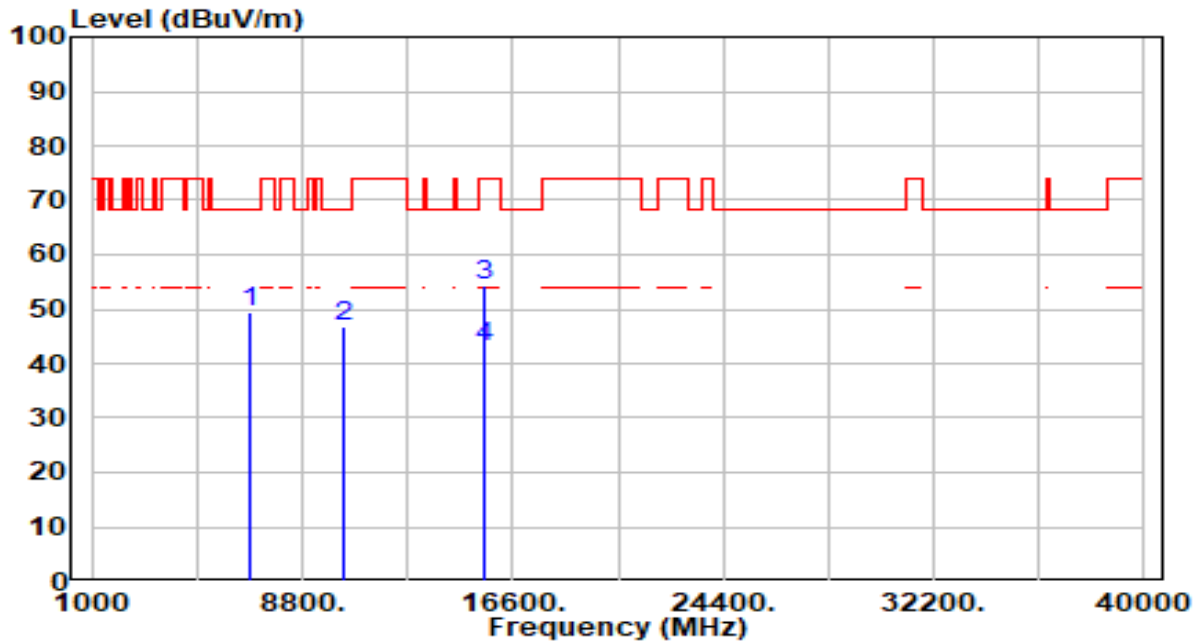


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	6907.000	43.96	5.39	49.35	-18.85	68.20	200	307	Peak
2		10360.000	41.83	4.87	46.70	-21.50	68.20	200	250	Peak
3		15540.000	48.30	6.21	54.51	-19.49	74.00	200	18	Peak
4	*	15540.000	36.90	6.21	43.11	-10.89	54.00	200	18	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-20MHz_Band1_TX_CH 36 ANT 0+1	Test Voltage	By Notebook PC

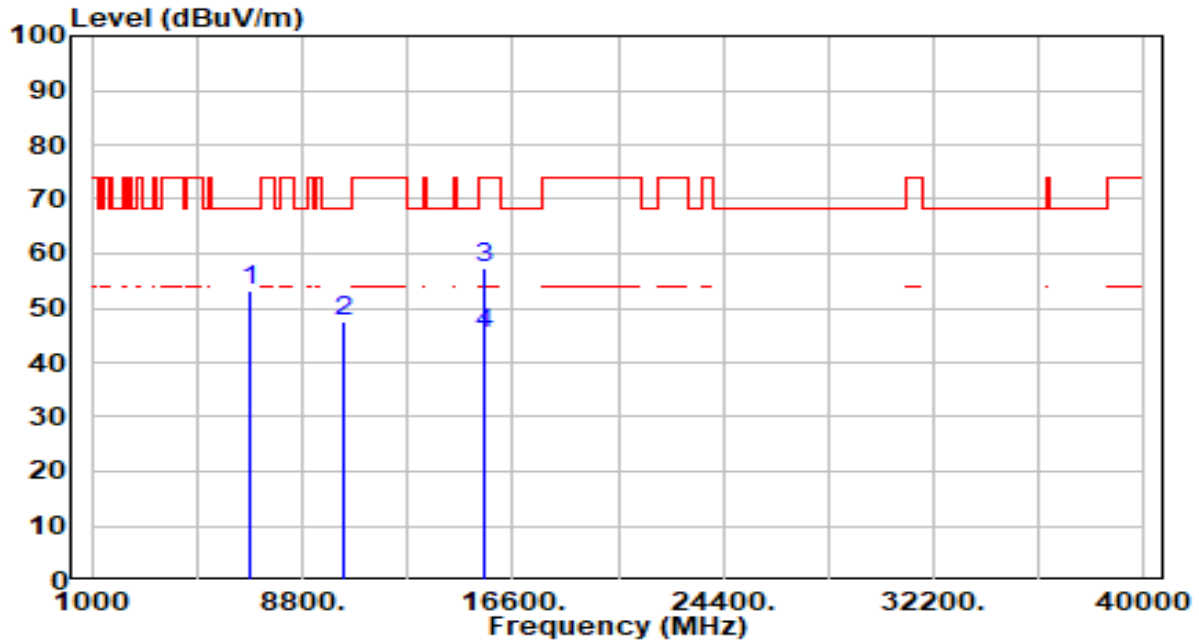


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	6907.000	47.72	5.39	53.11	-15.09	68.20	200	252	Peak
2		10360.000	42.83	4.87	47.70	-20.50	68.20	200	301	Peak
3		15540.000	51.06	6.21	57.27	-16.73	74.00	200	0	Peak
4	*	15540.000	39.04	6.21	45.25	-8.75	54.00	200	0	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-20MHz_Band1_TX_CH 40 ANT 0+1	Test Voltage	By Notebook PC

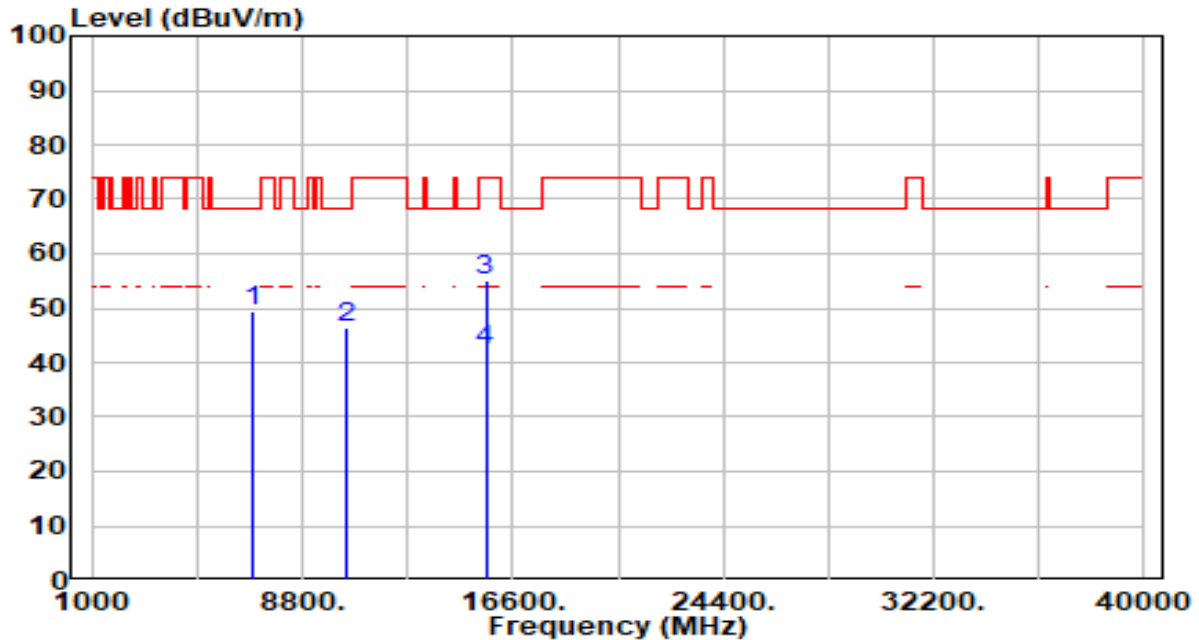


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	6933.000	44.14	5.39	49.54	-18.66	68.20	200	61	Peak
2		10400.000	41.69	4.82	46.50	-21.70	68.20	200	202	Peak
3		15600.000	49.12	6.15	55.27	-18.73	74.00	200	73	Peak
4	*	15600.000	36.12	6.15	42.27	-11.73	54.00	200	73	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-20MHz_Band1_TX_CH 40 ANT 0+1	Test Voltage	By Notebook PC

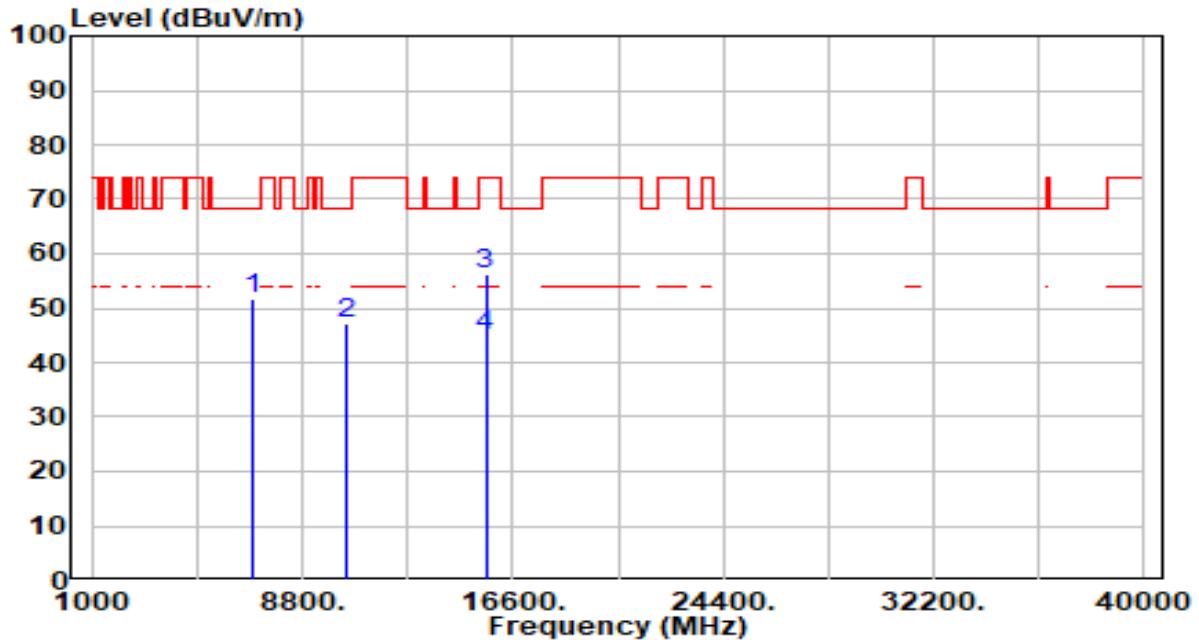


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	6933.000	46.42	5.39	51.81	-16.39	68.20	200	253	Peak
2	10400.000	42.40	4.82	47.22	-20.98	68.20	200	324	Peak
3	* 15600.000	50.18	6.15	56.33	-17.67	74.00	200	0	Peak
4	* 15600.000	38.69	6.15	44.84	-9.16	54.00	200	0	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-20MHz_Band1_TX_CH 48 ANT 0+1	Test Voltage	By Notebook PC

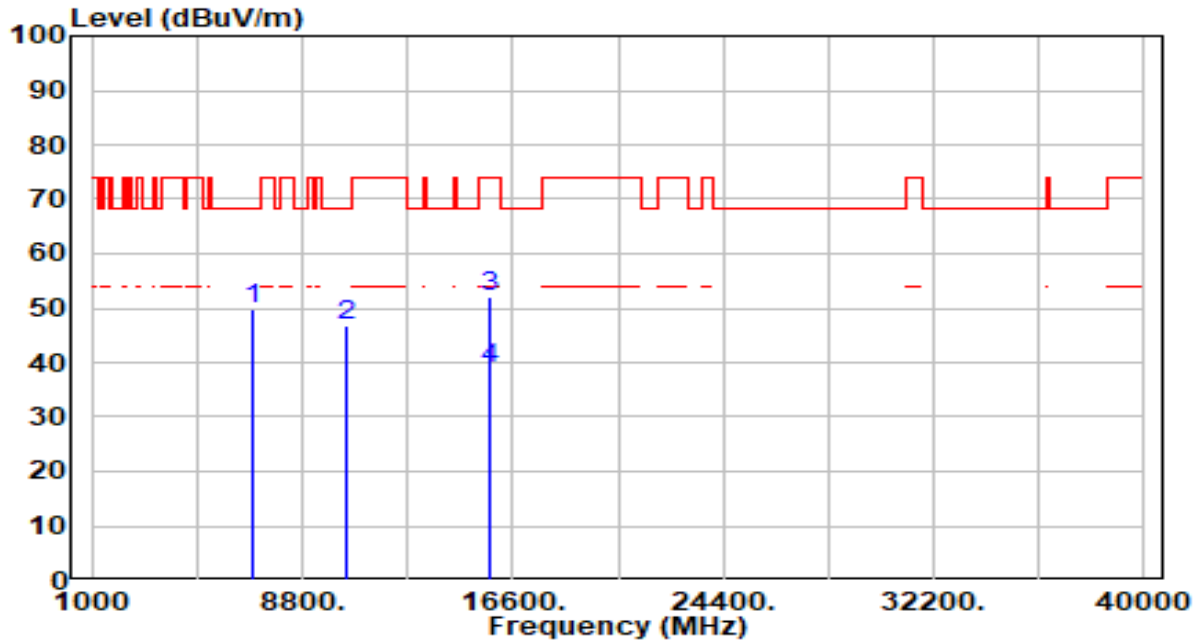


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	6986.000	44.47	5.40	49.87	-18.33	68.20	200	312	Peak
2		10480.000	42.25	4.71	46.96	-21.24	68.20	200	360	Peak
3		15720.000	45.57	6.39	51.96	-22.04	74.00	200	81	Peak
4	*	15720.000	32.50	6.39	38.89	-15.11	54.00	200	81	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-20MHz_Band1_TX_CH 48 ANT 0+1	Test Voltage	By Notebook PC

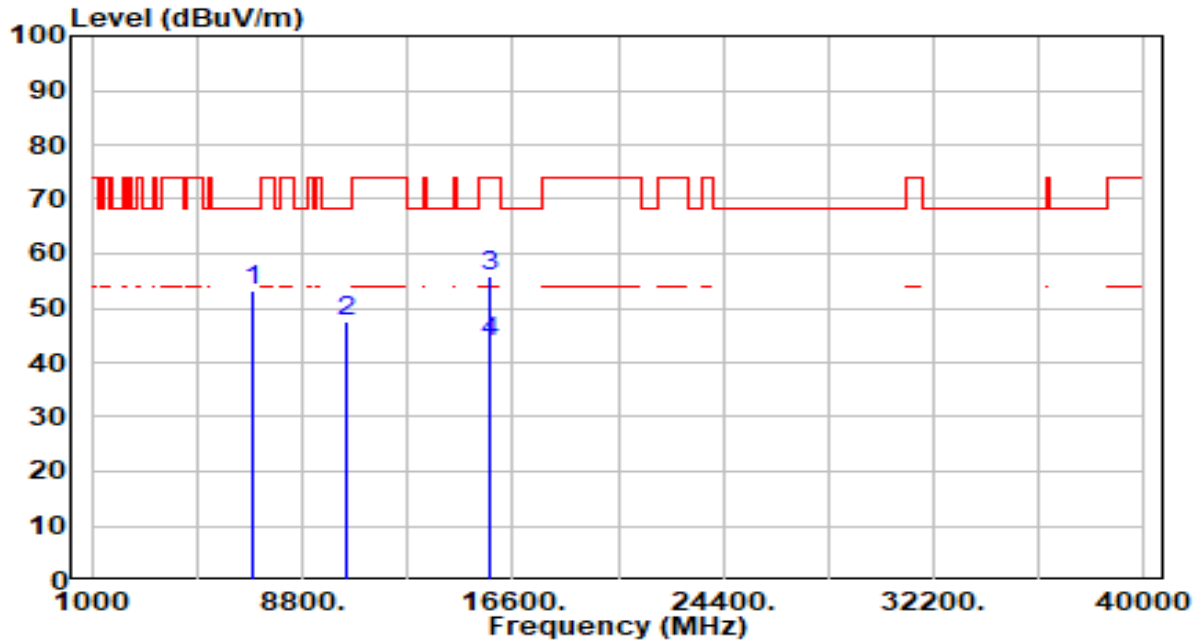


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	6987.000	47.99	5.40	53.39	-14.81	68.20	200	251	Peak
2		10480.000	42.78	4.71	47.49	-20.71	68.20	200	8	Peak
3		15720.000	49.50	6.39	55.89	-18.11	74.00	200	0	Peak
4	*	15720.000	37.48	6.39	43.87	-10.13	54.00	200	0	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-20MHz_Band2_TX_CH 52 ANT 0+1	Test Voltage	By Notebook PC

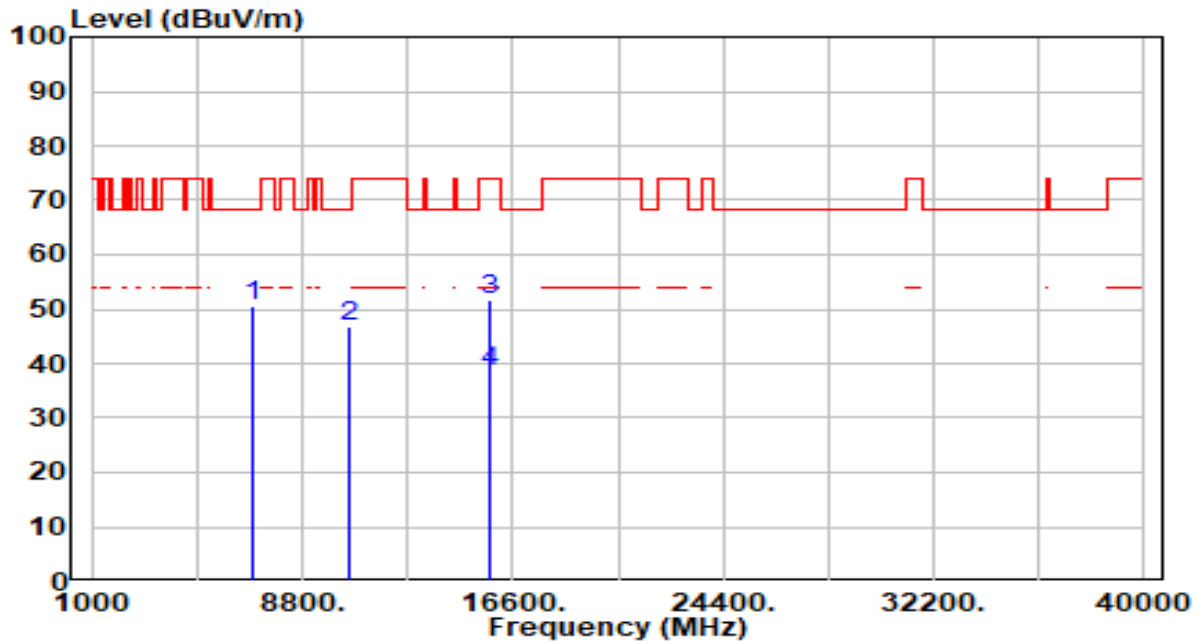


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	7013.000	45.25	5.41	50.65	-17.55	68.20	200	311	Peak
2		10520.000	42.23	4.67	46.90	-21.30	68.20	200	360	Peak
3		15780.000	45.03	6.51	51.54	-22.46	74.00	200	69	Peak
4	*	15780.000	31.98	6.51	38.49	-15.51	54.00	200	69	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-20MHz_Band2_TX_CH 52 ANT 0+1	Test Voltage	By Notebook PC

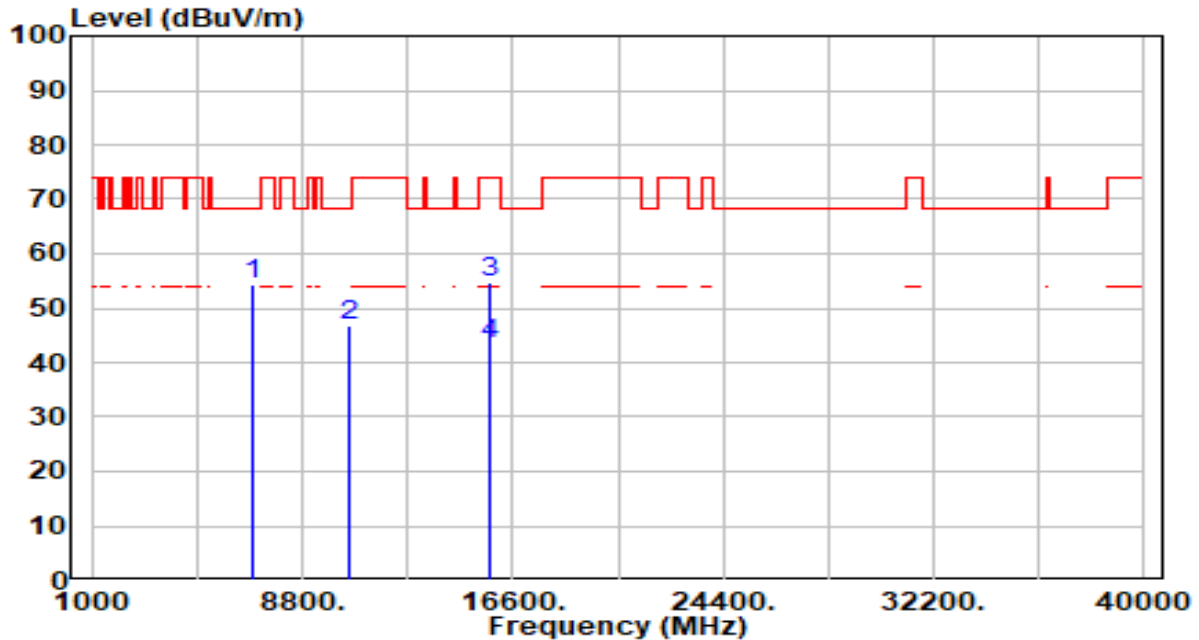


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	7013.000	48.76	5.41	54.16	-14.04	68.20	200	253	Peak
2		10520.000	42.17	4.67	46.84	-21.36	68.20	200	96	Peak
3		15780.000	48.27	6.51	54.78	-19.22	74.00	200	0	Peak
4	*	15780.000	36.90	6.51	43.41	-10.59	54.00	200	0	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-20MHz_Band2_TX_CH 60 ANT 0+1	Test Voltage	By Notebook PC

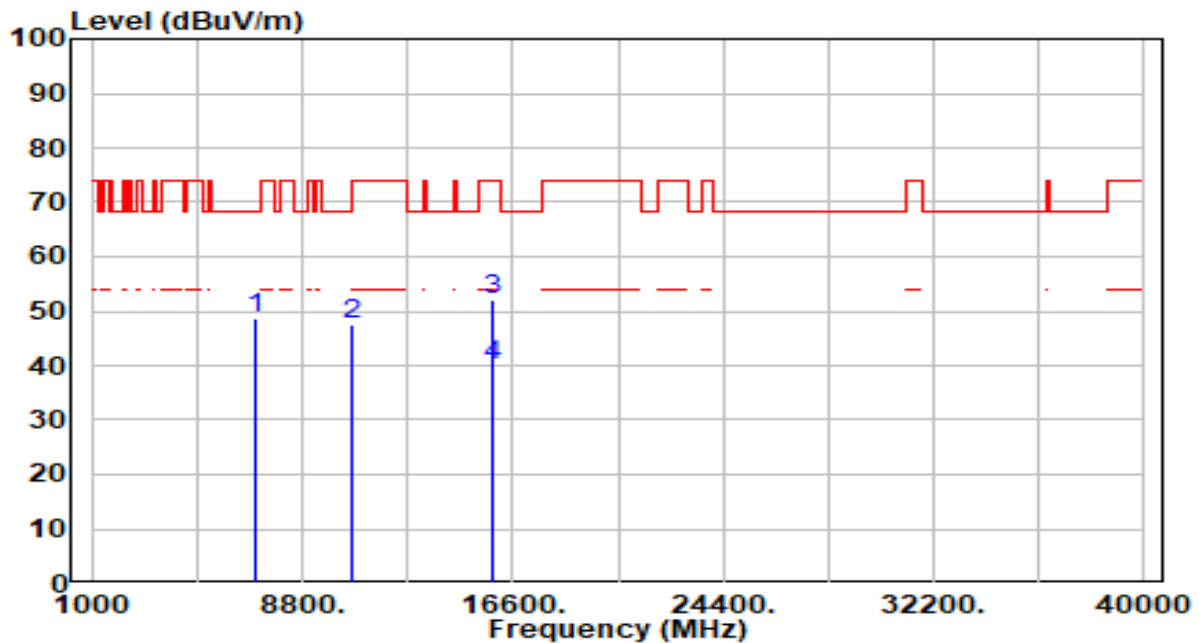


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	7067.000	43.19	5.44	48.63	-19.57	68.20	200	301	Peak
2		10600.000	42.84	4.61	47.45	-20.75	68.20	200	48	Peak
3		15900.000	45.55	6.55	52.10	-21.90	74.00	200	79	Peak
4	*	15900.000	33.55	6.55	40.10	-13.90	54.00	200	79	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-20MHz_Band2_TX_CH 60 ANT 0+1	Test Voltage	By Notebook PC

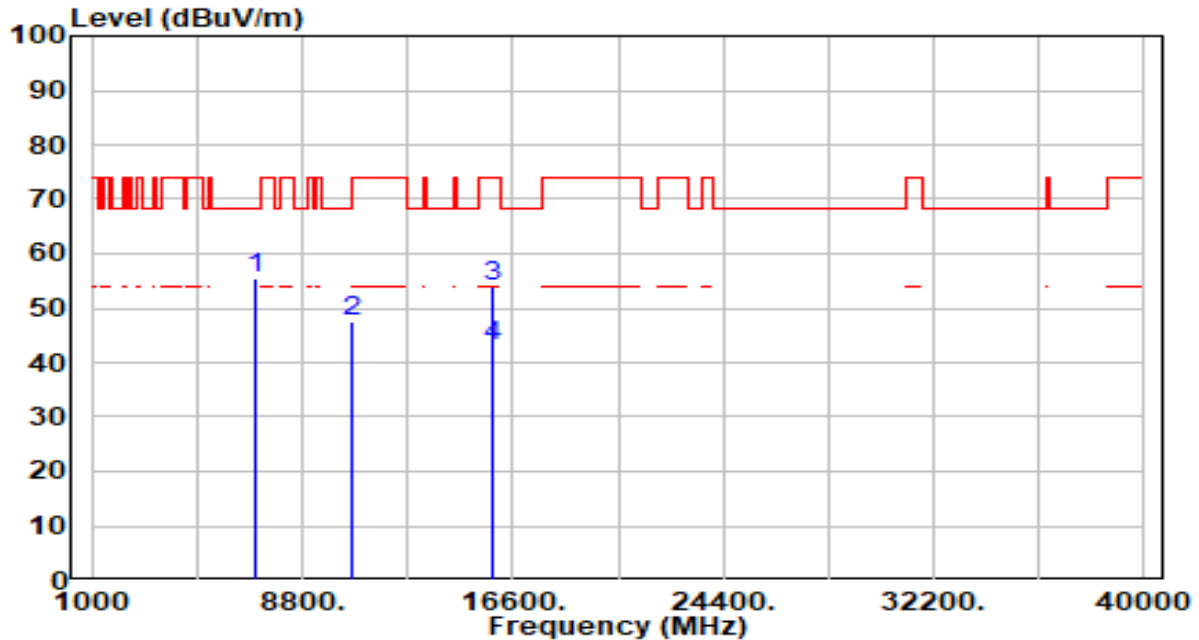


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	7067.000	50.11	5.44	55.55	-12.65	68.20	200	252	Peak
2		10600.000	42.87	4.61	47.48	-20.72	68.20	200	0	Peak
3		15900.000	47.37	6.55	53.92	-20.08	74.00	200	0	Peak
4	*	15900.000	36.34	6.55	42.89	-11.11	54.00	200	0	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-20MHz_Band2_TX_CH 64 ANT 0+1	Test Voltage	By Notebook PC

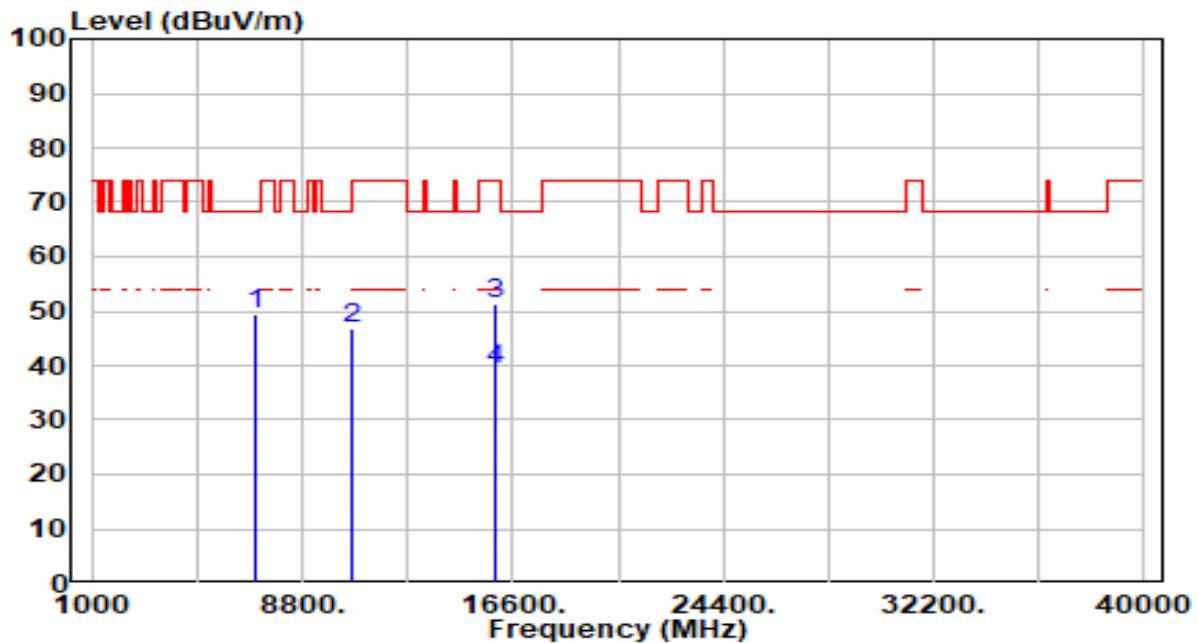


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	7093.000	44.15	5.46	49.61	-18.59	68.20	200	303	Peak
2		10640.000	42.13	4.62	46.75	-27.25	74.00	200	360	Peak
3		15960.000	44.88	6.55	51.43	-22.57	74.00	200	14	Peak
4	*	15960.000	32.88	6.55	39.43	-14.57	54.00	200	14	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-20MHz_Band2_TX_CH 64 ANT 0+1	Test Voltage	By Notebook PC

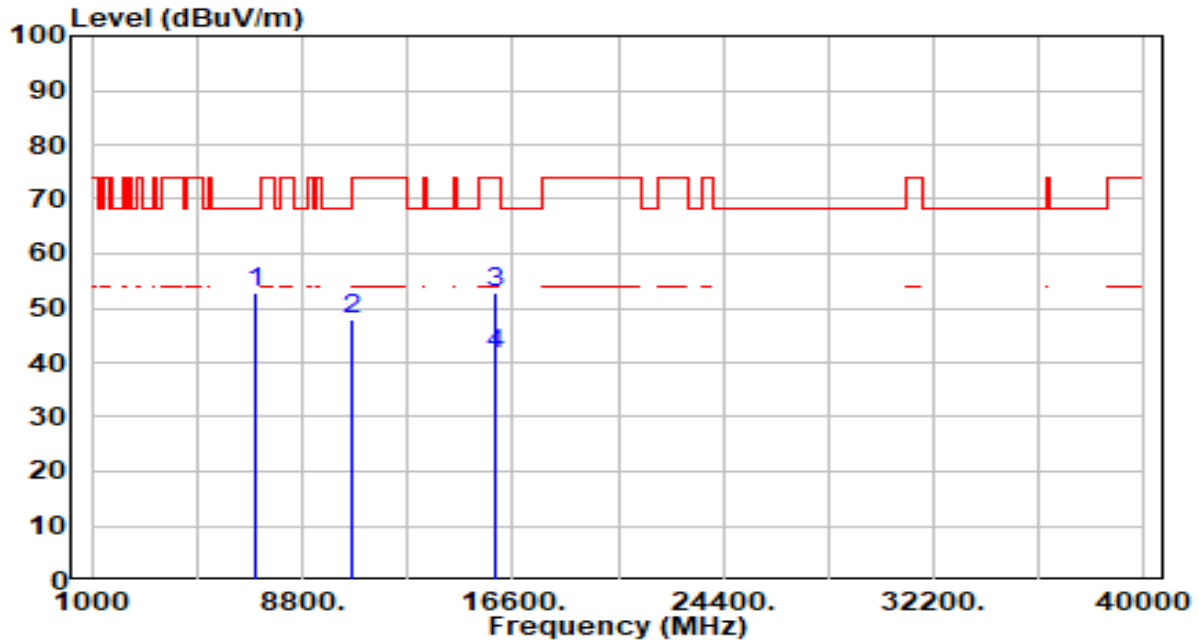


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	7093.000	47.38	5.46	52.84	-15.36	68.20	200	254	Peak
2		10640.000	43.29	4.62	47.91	-26.09	74.00	200	0	Peak
3		15960.000	46.11	6.55	52.66	-21.34	74.00	200	0	Peak
4	*	15960.000	35.09	6.55	41.64	-12.36	54.00	200	0	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-20MHz_Band3_TX_CH 100 ANT 0+1	Test Voltage	By Notebook PC

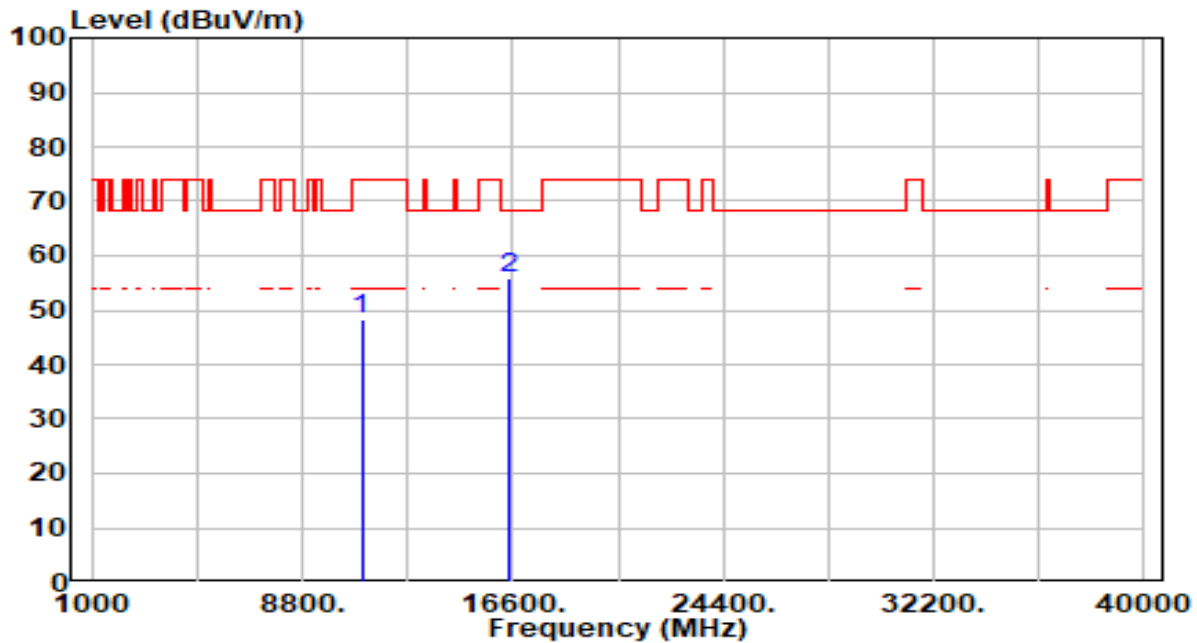


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11000.000	43.60	4.52	48.12	-25.88	74.00	200	0	Peak
2	*	16500.000	49.75	6.10	55.85	-12.35	68.20	200	6	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-20MHz_Band3_TX_CH 100 ANT 0+1	Test Voltage	By Notebook PC

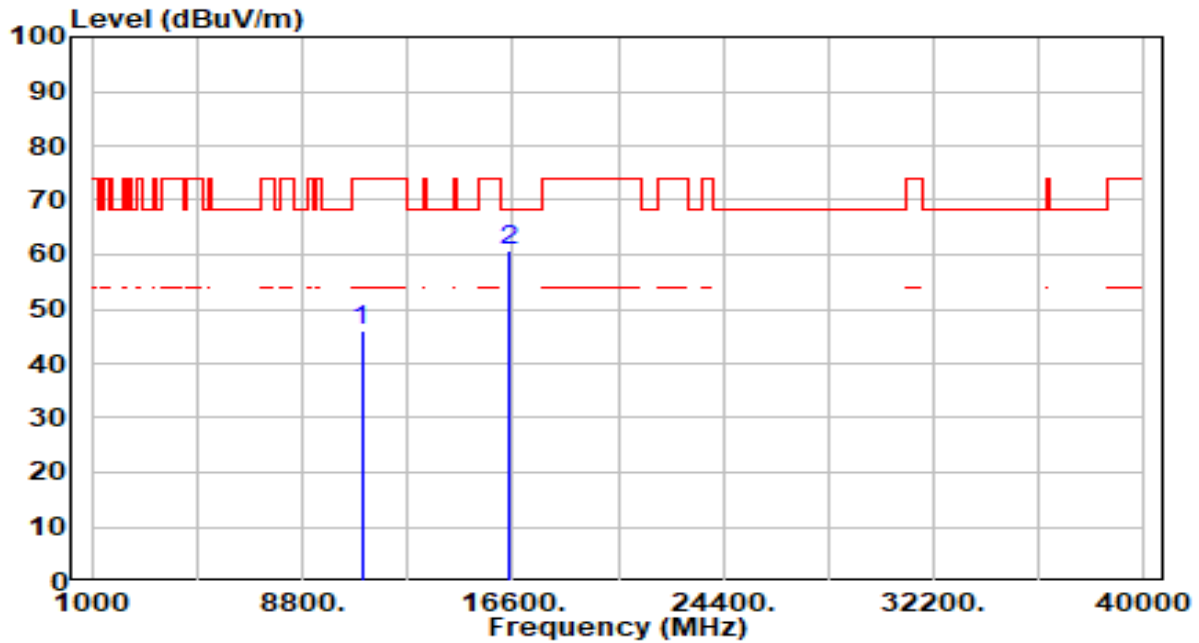


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11000.000	41.36	4.52	45.88	-28.12	74.00	200	10	Peak
2	* 16500.000	54.79	6.10	60.89	-7.31	68.20	200	5	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-20MHz_Band3_TX_CH 116 ANT 0+1	Test Voltage	By Notebook PC

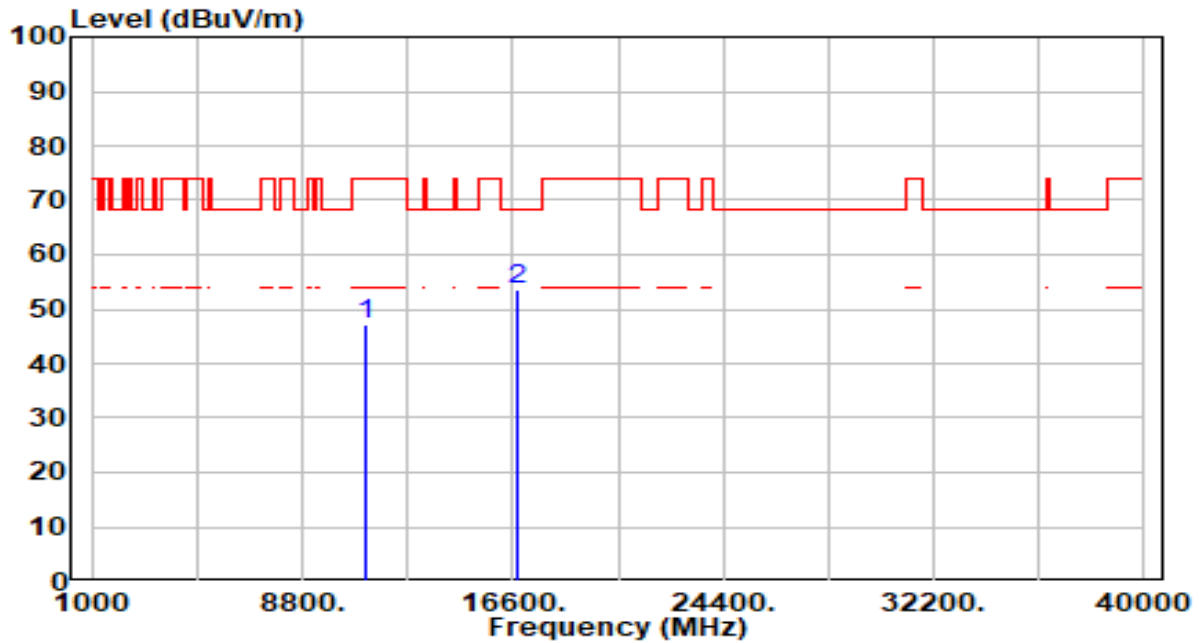


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11160.000	42.41	4.94	47.35	-26.65	74.00	100	288	Peak
2	*	16740.000	47.35	6.19	53.54	-14.66	68.20	100	46	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-20MHz_Band3_TX_CH 116 ANT 0+1	Test Voltage	By Notebook PC

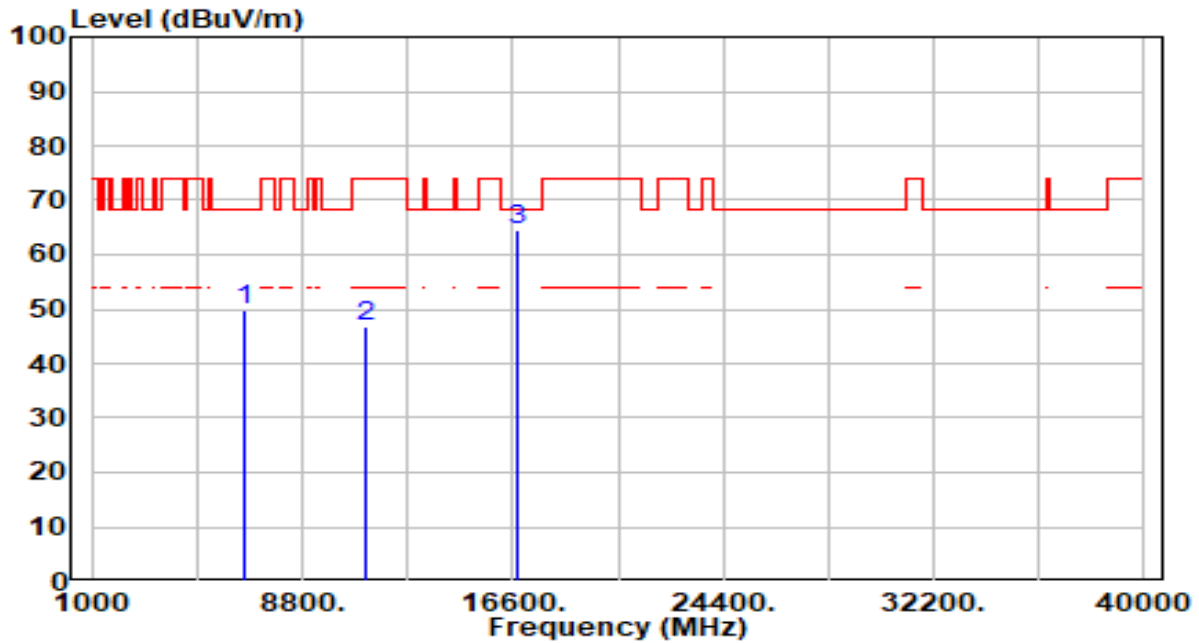


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	6695.000	44.72	5.15	49.87	-18.33	68.20	200	249	Peak
2	11160.000	41.82	4.94	46.76	-27.24	74.00	105	360	Peak
3	* 16740.000	58.28	6.19	64.47	-3.73	68.20	100	347	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-20MHz_Band3_TX_CH 140 ANT 0+1	Test Voltage	By Notebook PC

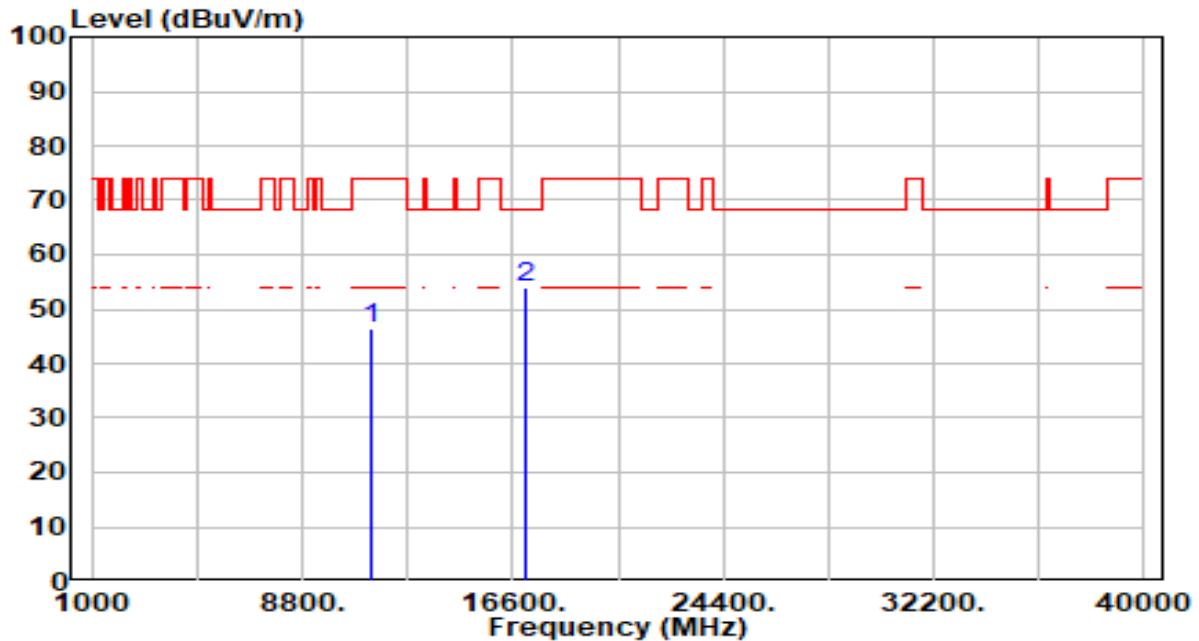


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11400.000	41.23	5.26	46.50	-27.50	74.00	200	149	Peak
2	* 17100.000	47.86	5.97	53.83	-14.37	68.20	200	340	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-20MHz_Band3_TX_CH 140 ANT 0+1	Test Voltage	By Notebook PC

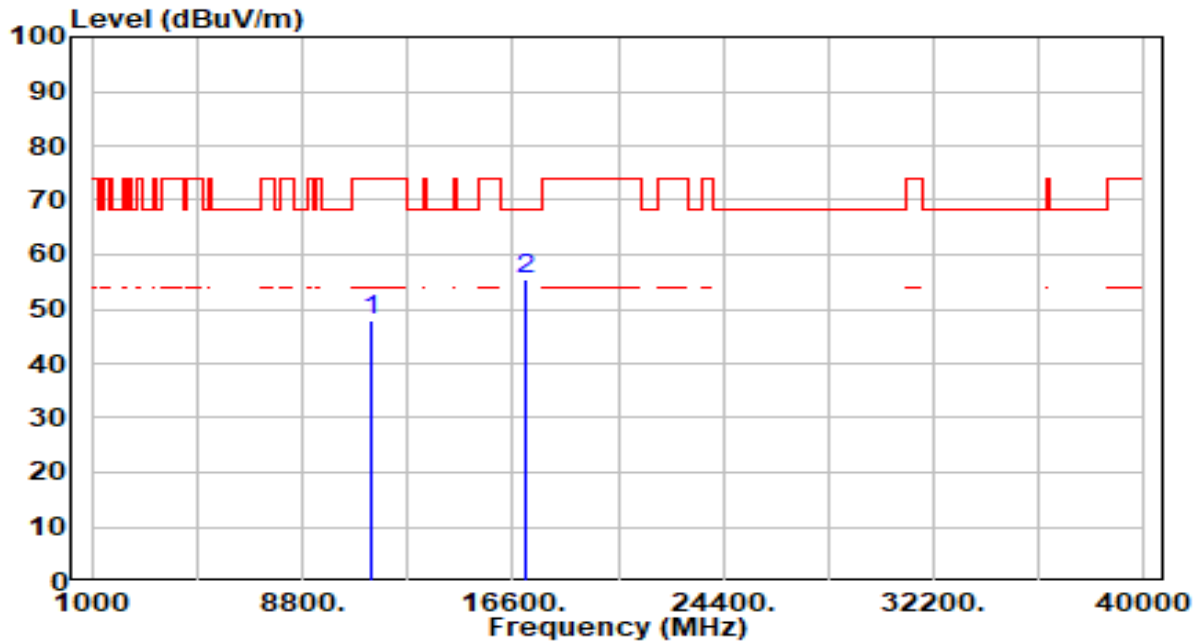


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11400.000	42.79	5.26	48.06	-25.94	74.00	200	24	Peak
2	* 17100.000	49.50	5.97	55.47	-12.73	68.20	200	341	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-20MHz_Band3_TX_CH 144 ANT 0+1	Test Voltage	By Notebook PC

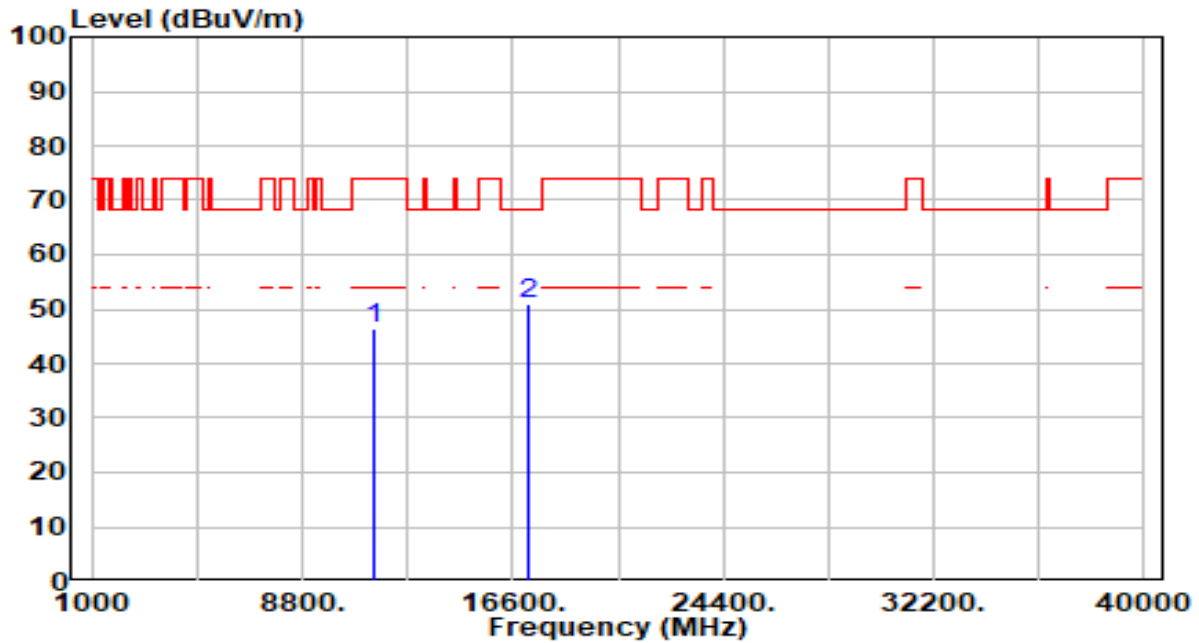


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11440.000	41.31	5.29	46.60	-27.40	74.00	100	203	Peak
2	*	17160.000	45.06	5.87	50.93	-17.27	68.20	100	293	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-20MHz_Band3_TX_CH 144 ANT 0+1	Test Voltage	By Notebook PC

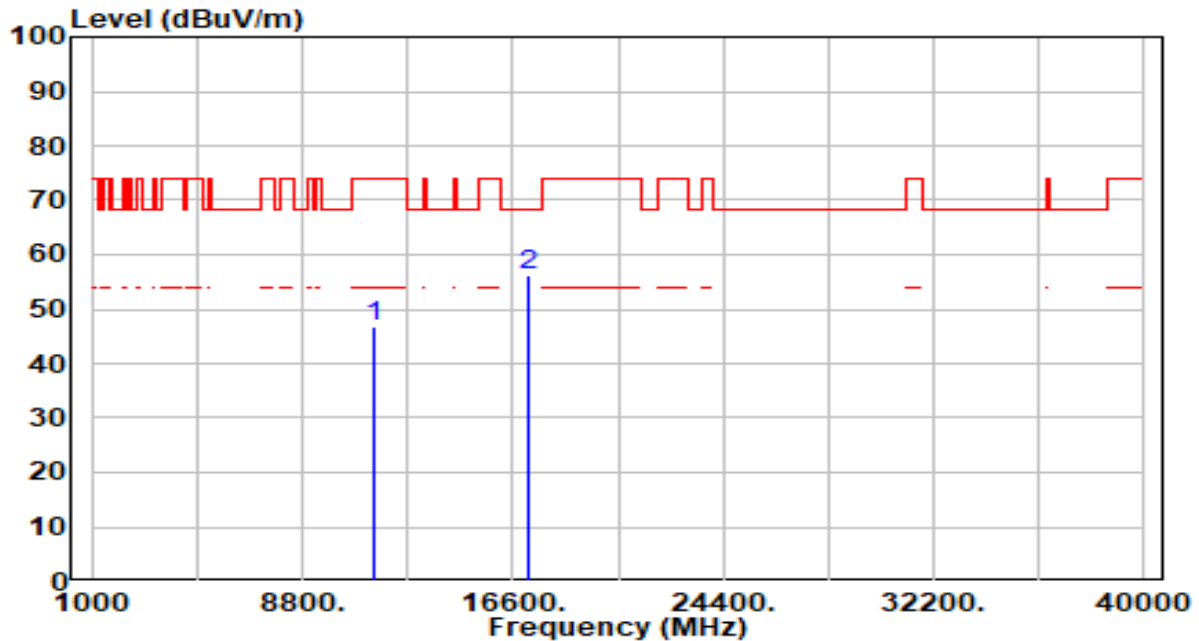


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11440.000	41.33	5.29	46.61	-27.39	74.00	100	31	Peak
2	* 17160.000	50.52	5.87	56.39	-11.81	68.20	100	336	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-20MHz_Band4_TX_CH 149 ANT 0+1	Test Voltage	By Notebook PC

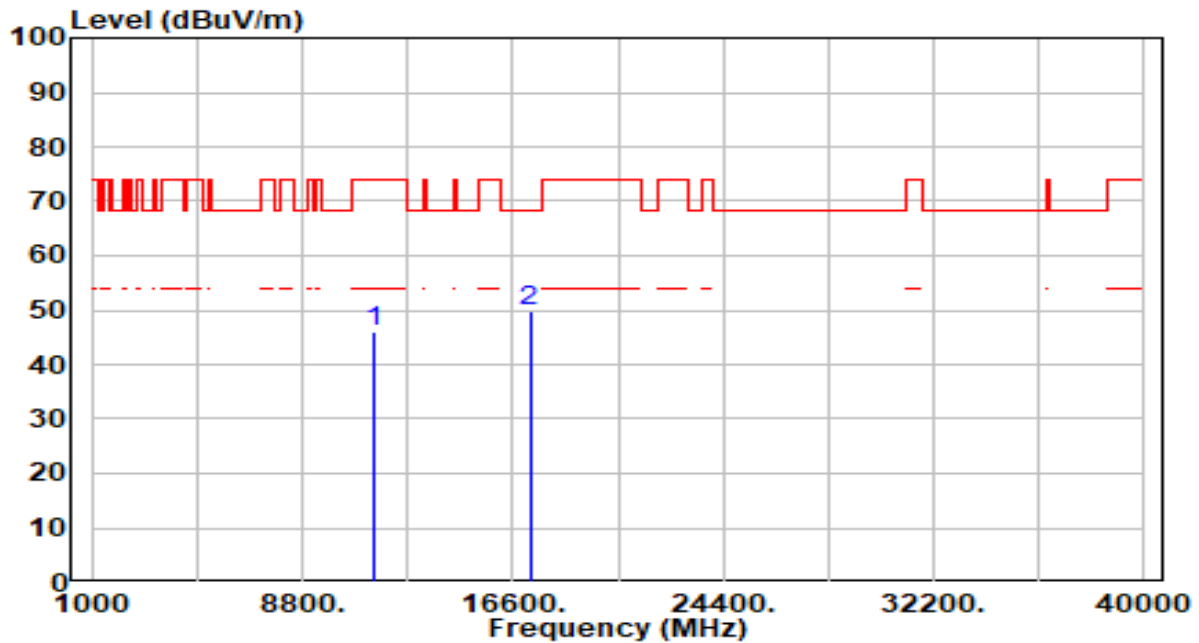


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11490.000	40.90	5.32	46.22	-27.78	74.00	100	235	Peak
2	*	17235.000	44.13	5.71	49.84	-18.36	68.20	100	354	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-20MHz_Band4_TX_CH 149 ANT 0+1	Test Voltage	By Notebook PC

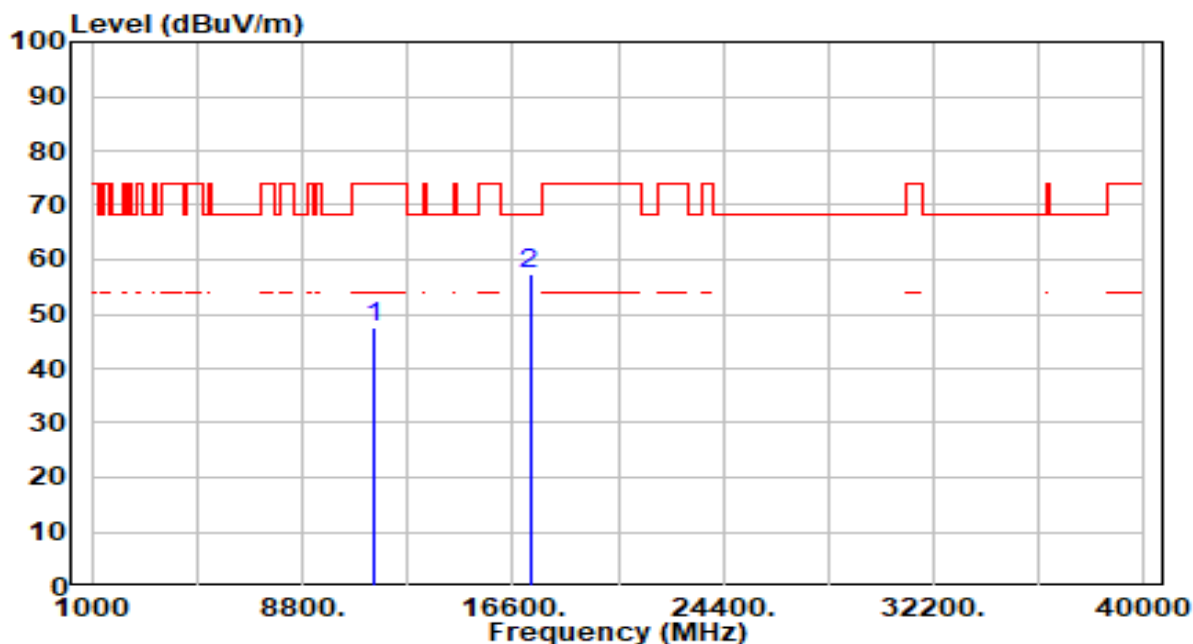


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11490.000	42.29	5.32	47.61	-26.39	74.00	100	273	Peak
2	* 17235.000	51.77	5.71	57.48	-10.72	68.20	100	342	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-20MHz_Band4_TX_CH 157 ANT 0+1	Test Voltage	By Notebook PC

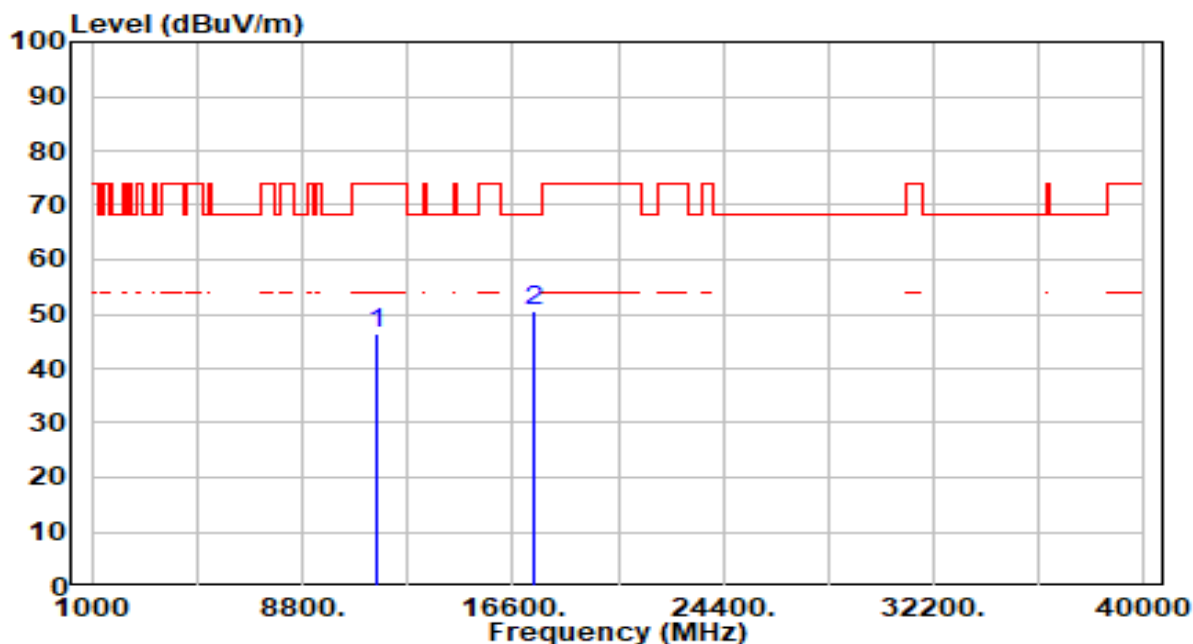


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11570.000	40.92	5.38	46.30	-27.70	74.00	100	106	Peak
2	* 17355.000	45.12	5.39	50.51	-17.69	68.20	100	295	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-20MHz_Band4_TX_CH 157 ANT 0+1	Test Voltage	By Notebook PC

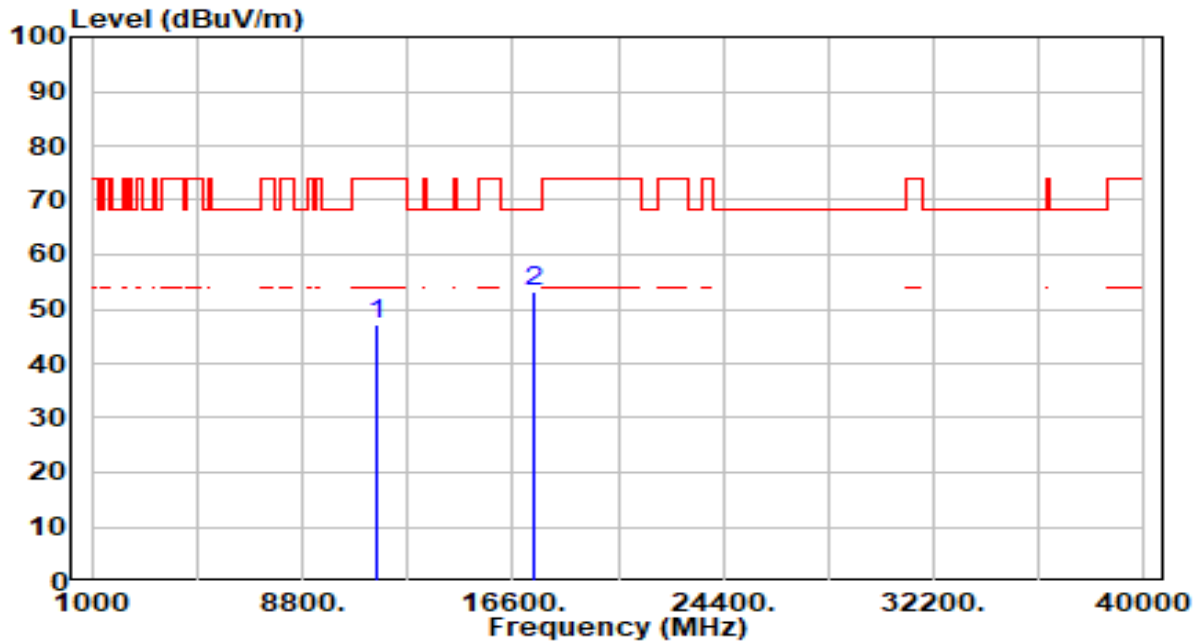


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11570.000	41.64	5.38	47.02	-26.98	74.00	100	322	Peak
2	*	17355.000	47.90	5.39	53.29	-14.91	68.20	100	340	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-20MHz_Band4_TX_CH 165 ANT 0+1	Test Voltage	By Notebook PC

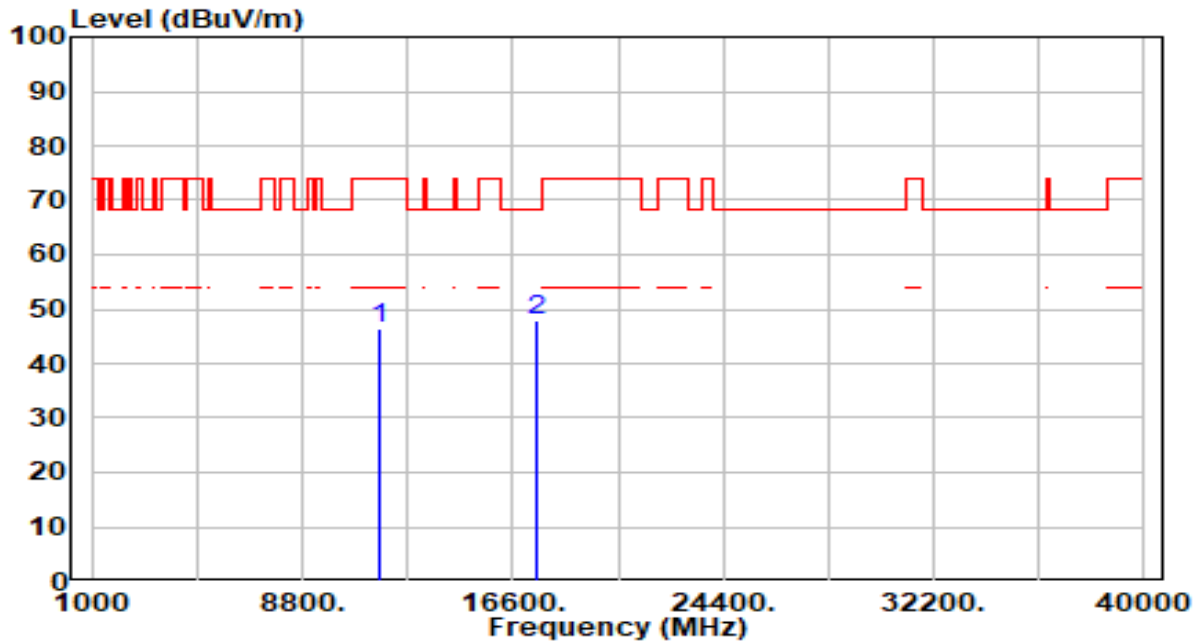


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11650.000	41.04	5.36	46.40	-27.60	74.00	100	360	Peak
2	* 17475.000	42.79	5.29	48.08	-20.12	68.20	100	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-20MHz_Band4_TX_CH 165 ANT 0+1	Test Voltage	By Notebook PC

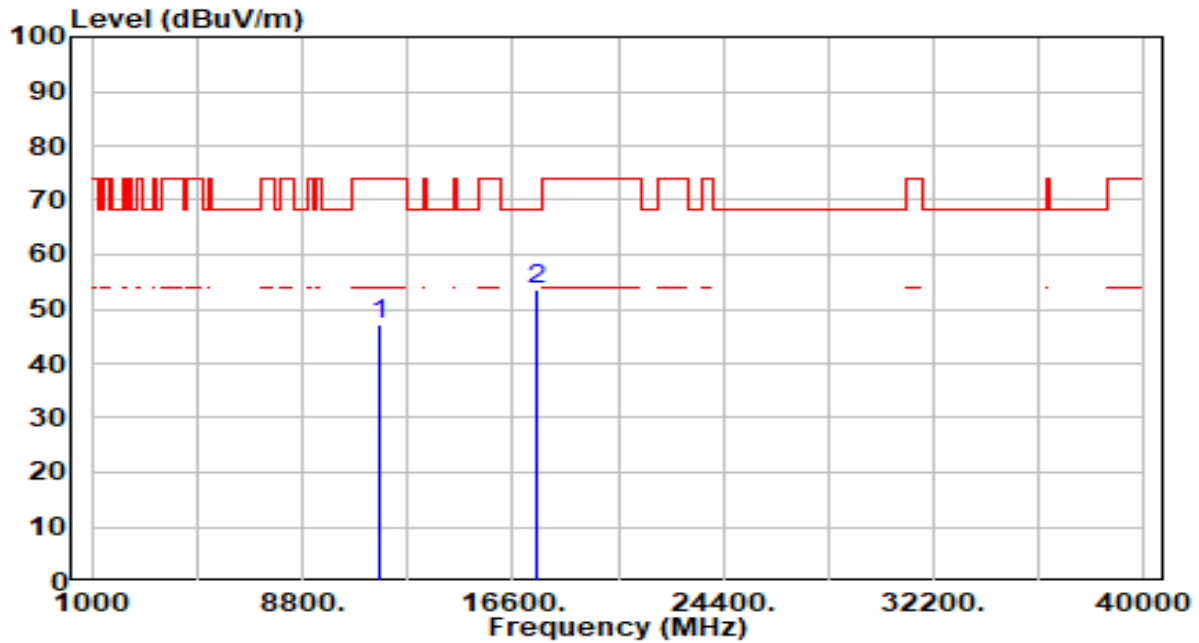


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11650.000	41.86	5.36	47.22	-26.78	74.00	100	186	Peak
2	* 17475.000	48.34	5.29	53.64	-14.56	68.20	100	340	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-40MHz_Band1_TX_CH 38 ANT 0+1	Test Voltage	By Notebook PC

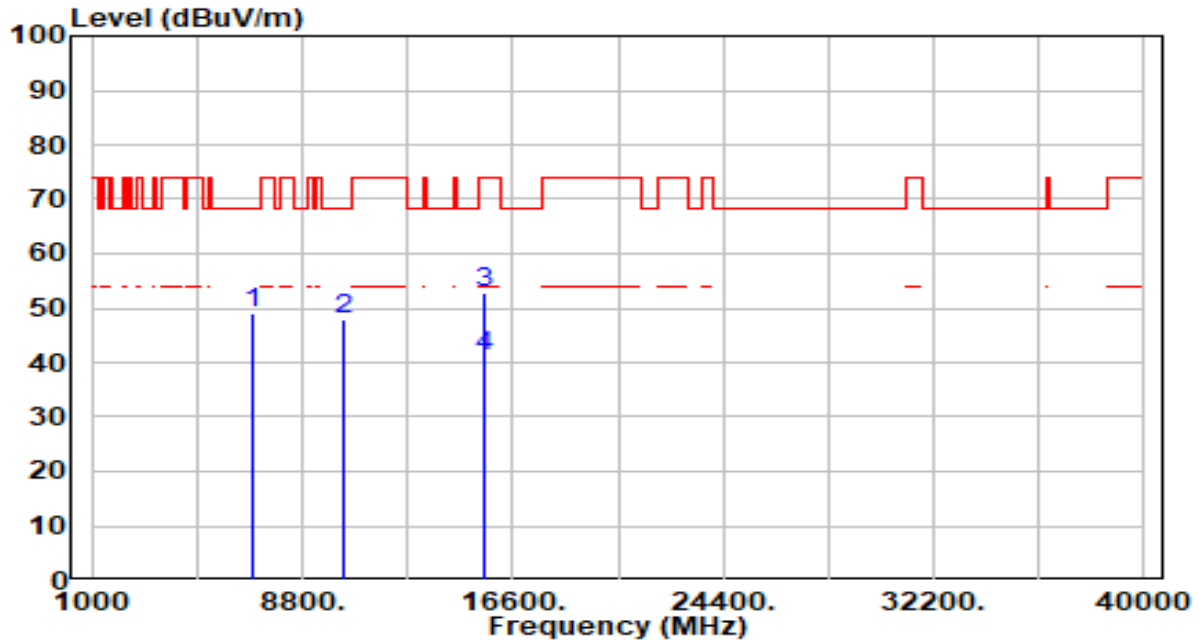


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	6920.000	43.61	5.39	49.00	-19.20	68.20	200	251	Peak
2		10380.000	43.10	4.84	47.94	-20.26	68.20	200	190	Peak
3		15570.000	46.63	6.18	52.81	-21.19	74.00	200	84	Peak
4	*	15570.000	35.10	6.18	41.28	-12.72	54.00	200	84	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-40MHz_Band1_TX_CH 38 ANT 0+1	Test Voltage	By Notebook PC

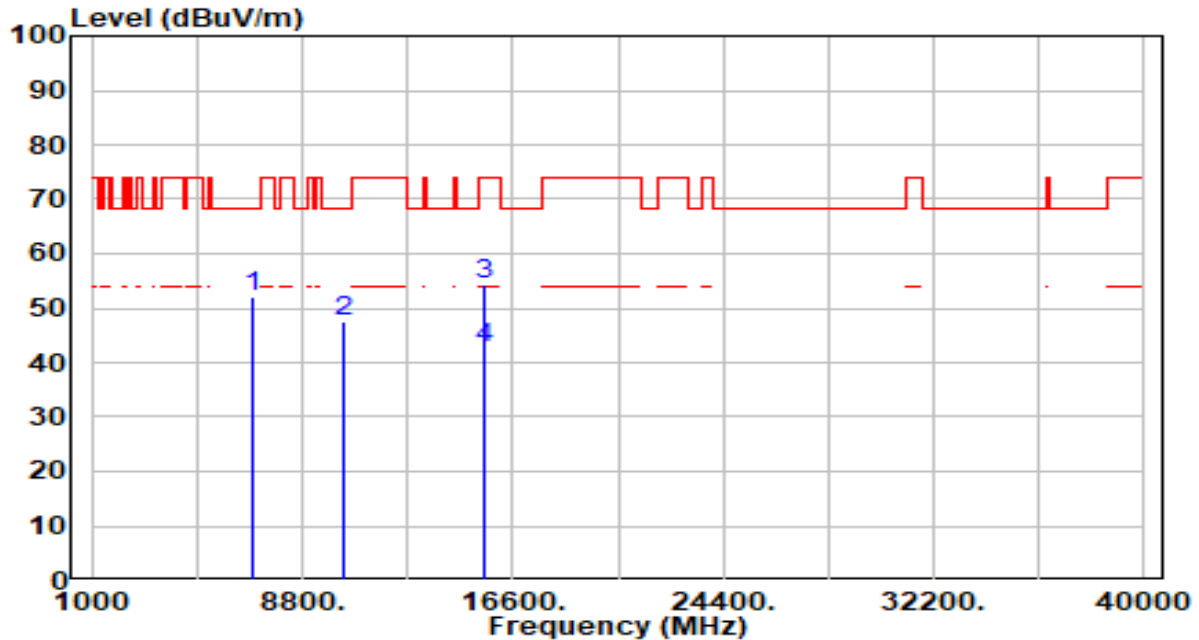


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	6920.000	46.61	5.39	52.00	-16.20	68.20	200	253	Peak
2		10380.000	42.75	4.84	47.59	-20.61	68.20	200	30	Peak
3		15570.000	48.15	6.18	54.32	-19.68	74.00	200	0	Peak
4	*	15570.000	36.34	6.18	42.52	-11.48	54.00	200	0	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-40MHz_Band1_TX_CH 46 ANT 0+1	Test Voltage	By Notebook PC

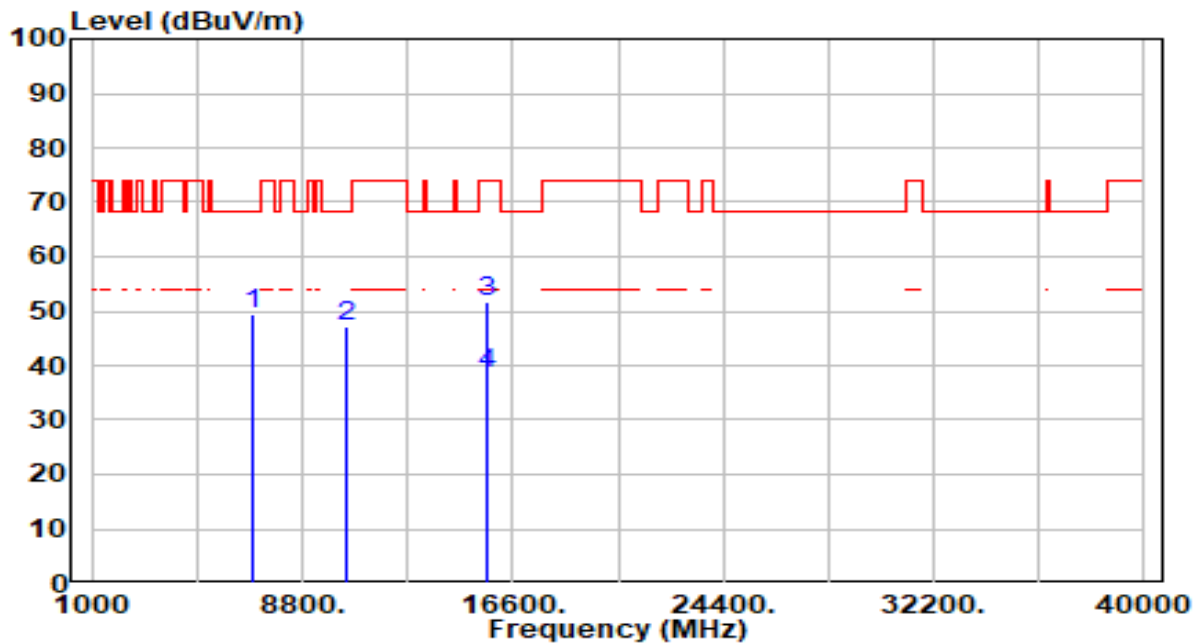


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	6973.000	44.13	5.40	49.53	-18.67	68.20	200	306	Peak
2		10460.000	42.25	4.74	46.98	-21.22	68.20	200	41	Peak
3		15690.000	45.33	6.33	51.66	-22.34	74.00	200	18	Peak
4	*	15690.000	32.32	6.33	38.65	-15.35	54.00	200	18	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-40MHz_Band1_TX_CH 46 ANT 0+1	Test Voltage	By Notebook PC

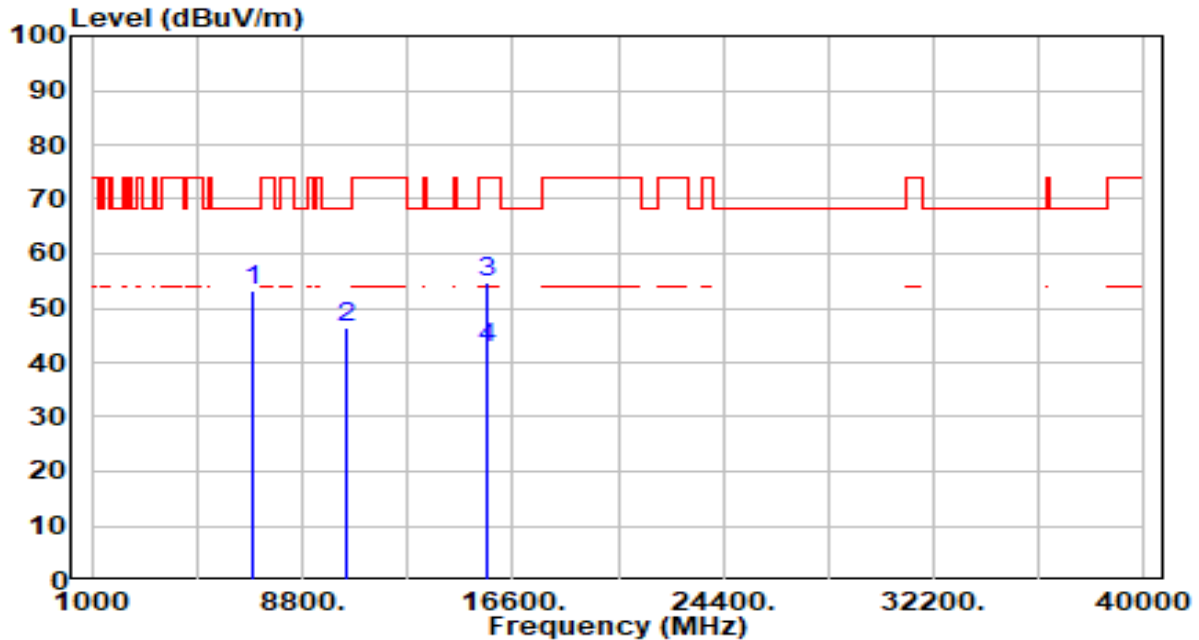


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	6973.000	47.66	5.40	53.06	-15.14	68.20	200	250	Peak
2		10460.000	41.68	4.74	46.42	-21.78	68.20	200	342	Peak
3		15690.000	48.33	6.33	54.66	-19.34	74.00	200	0	Peak
4	*	15690.000	36.33	6.33	42.66	-11.34	54.00	200	0	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-40MHz_Band2_TX_CH 54 ANT 0+1	Test Voltage	By Notebook PC

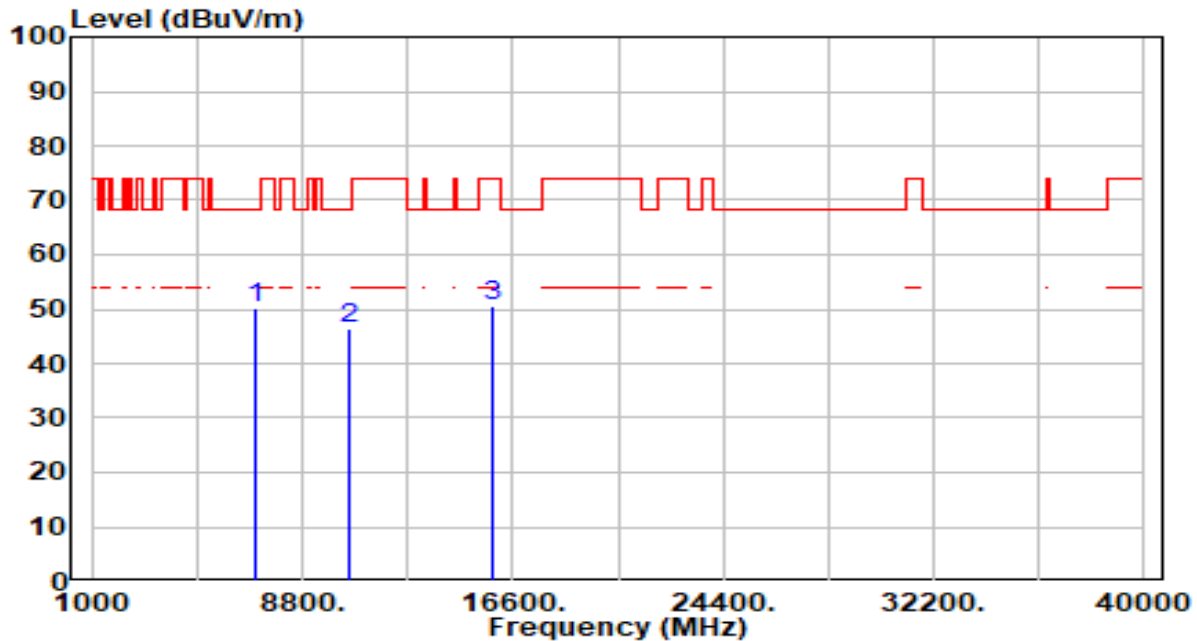


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	7027.000	44.73	5.42	50.15	-18.05	68.20	200	306	Peak
2		10540.000	41.94	4.66	46.60	-21.60	68.20	200	63	Peak
3		15810.000	43.84	6.55	50.39	-23.61	74.00	200	23	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-40MHz_Band2_TX_CH 54 ANT 0+1	Test Voltage	By Notebook PC

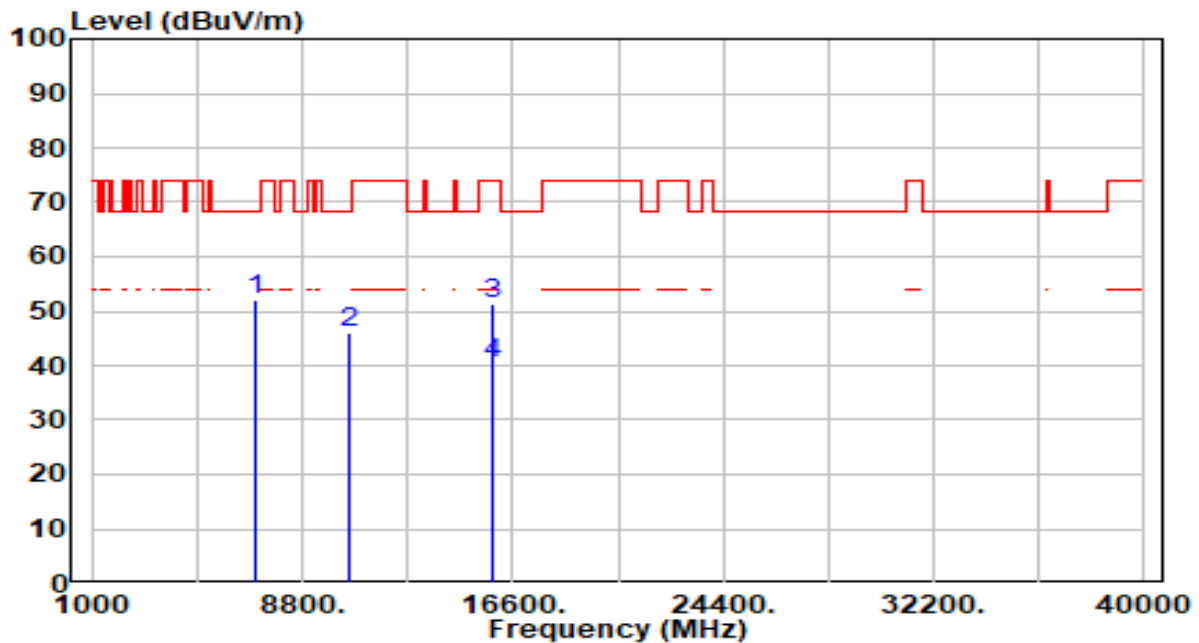


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	7027.000	46.84	5.42	52.26	-15.94	68.20	200	253	Peak
2		10540.000	41.42	4.66	46.07	-22.13	68.20	200	0	Peak
3		15810.000	44.81	6.55	51.36	-22.64	74.00	200	0	Peak
4	*	15810.000	33.80	6.55	40.35	-13.65	54.00	200	0	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-40MHz_Band2_TX_CH 62 ANT 0+1	Test Voltage	By Notebook PC

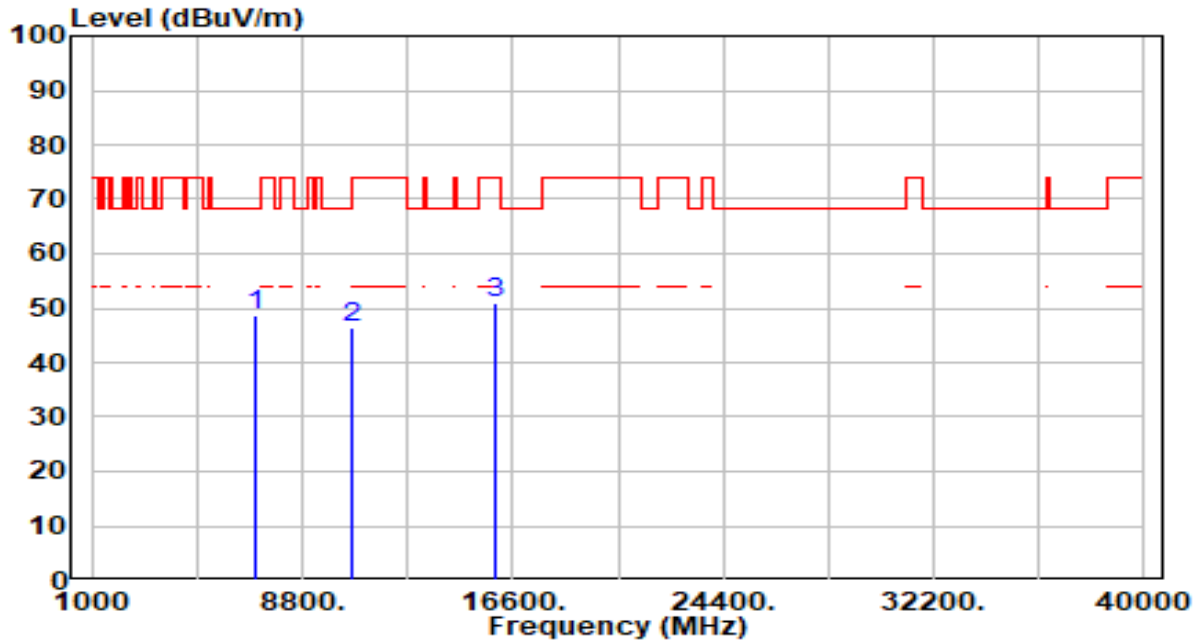

No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	7080.000	43.32	5.45	48.77	-19.43	68.20	200	311	Peak
2		10620.000	41.96	4.62	46.58	-27.42	74.00	200	61	Peak
3		15930.000	44.30	6.55	50.85	-23.15	74.00	200	86	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.