


EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-40MHz_Band2_TX_CH 62 ANT 0+1	Test Voltage	By Notebook PC

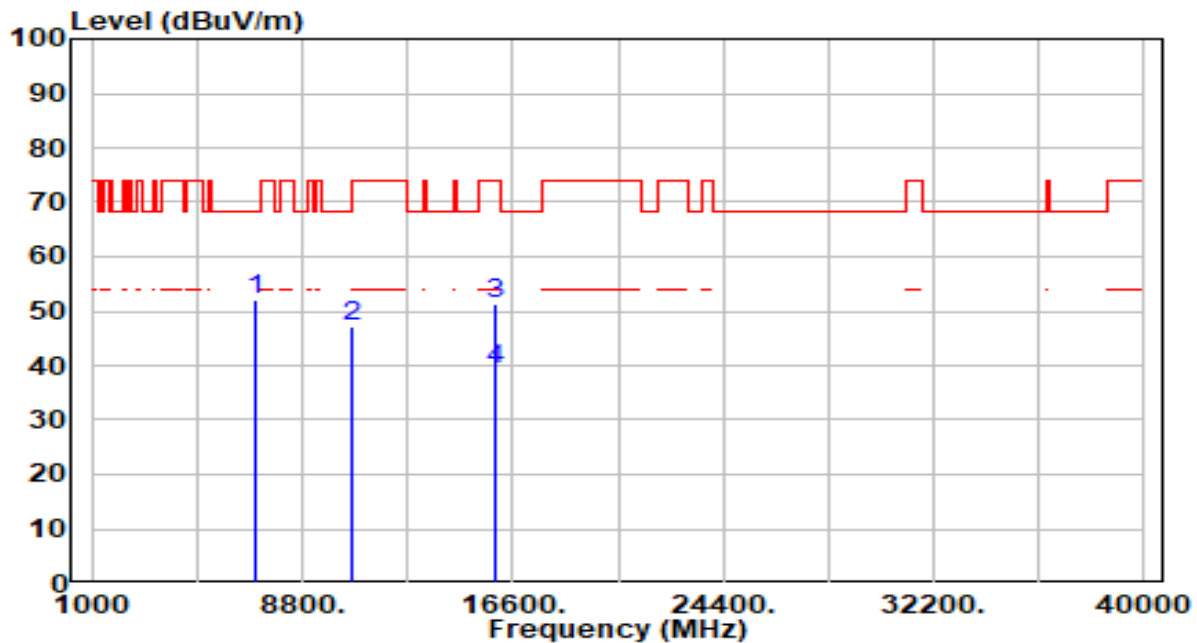


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	7080.000	46.79	5.45	52.24	-15.96	68.20	200	250	Peak
2		10620.000	42.48	4.62	47.10	-26.90	74.00	200	339	Peak
3		15930.000	44.81	6.55	51.36	-22.64	74.00	200	19	Peak
4	*	15930.000	32.80	6.55	39.35	-14.65	54.00	200	19	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-40MHz_Band3_TX_CH 102 ANT 0+1	Test Voltage	By Notebook PC

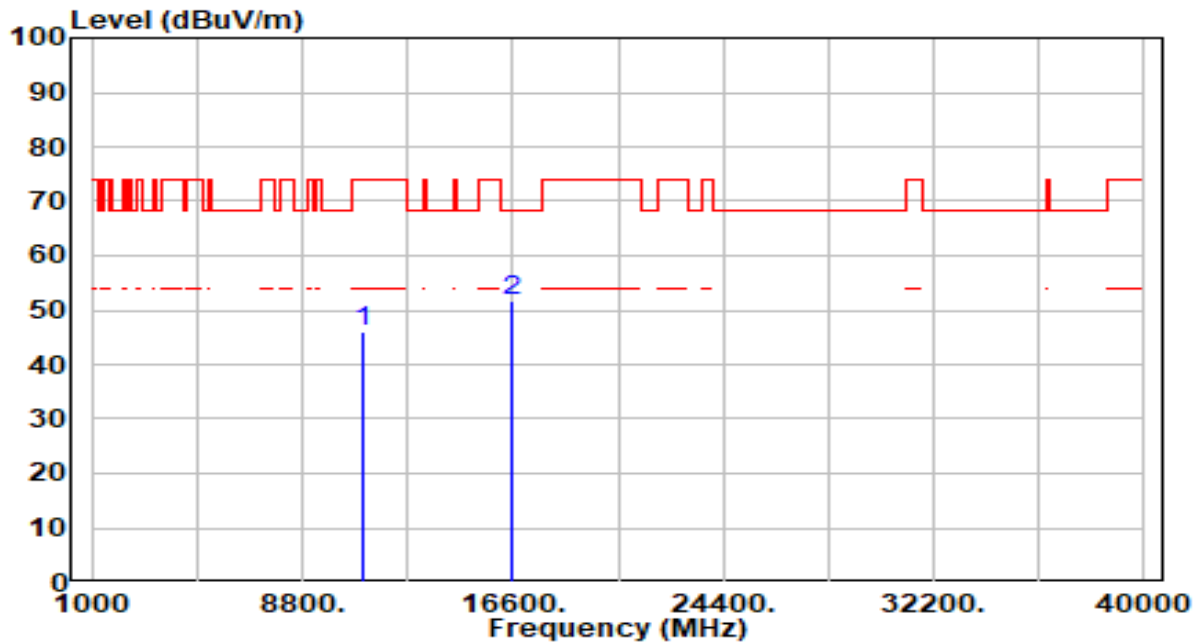


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11020.000	41.50	4.57	46.07	-27.93	74.00	100	315	Peak
2	*	16530.000	45.48	6.10	51.58	-16.62	68.20	100	37	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-40MHz_Band3_TX_CH 102 ANT 0+1	Test Voltage	By Notebook PC

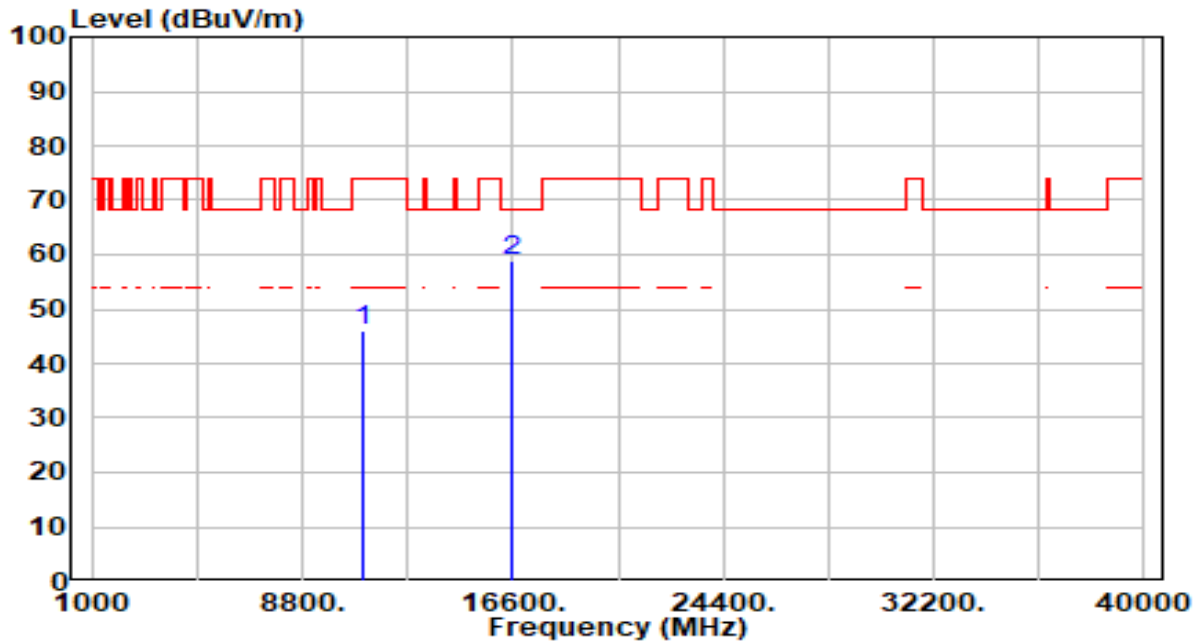


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11020.000	41.40	4.57	45.97	-28.03	74.00	100	41	Peak
2	* 16530.000	52.91	6.10	59.01	-9.19	68.20	100	351	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-40MHz_Band3_TX_CH 110 ANT 0+1	Test Voltage	By Notebook PC

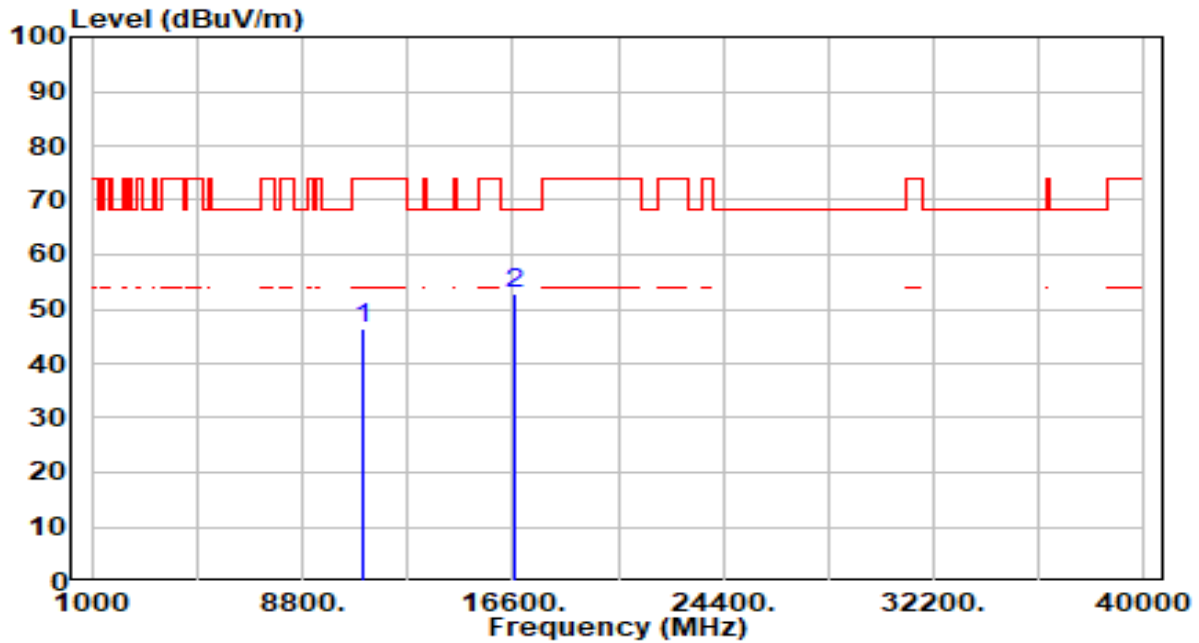


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11100.000	41.78	4.78	46.56	-27.44	74.00	100	46	Peak
2	* 16650.000	46.88	6.14	53.01	-15.19	68.20	100	350	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-40MHz_Band3_TX_CH 110 ANT 0+1	Test Voltage	By Notebook PC

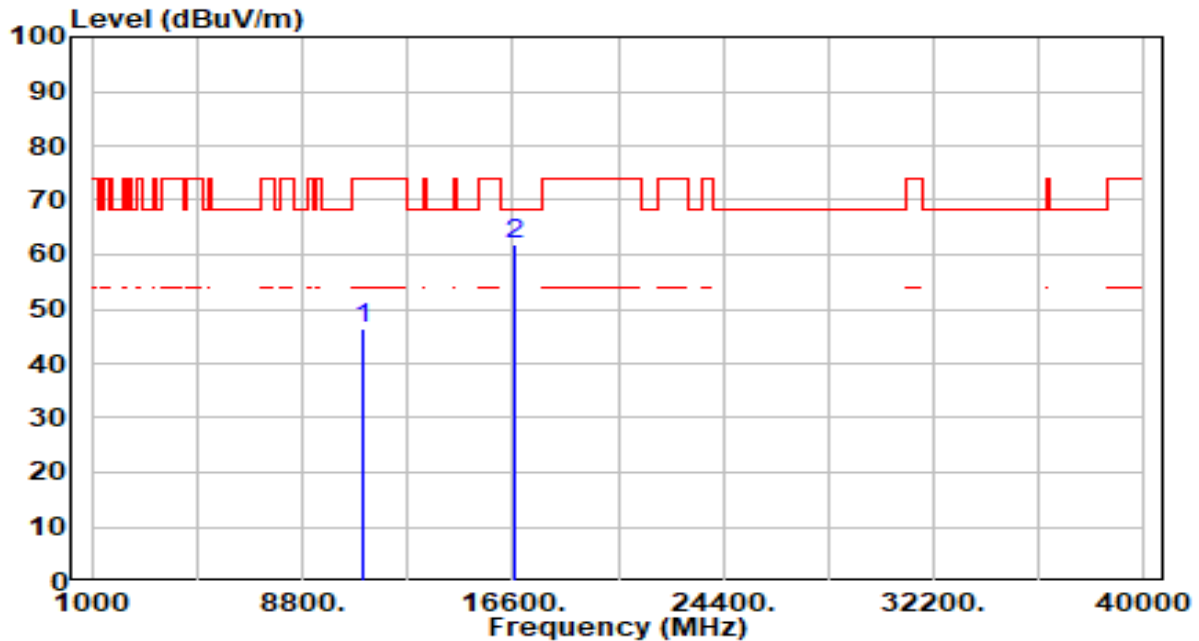


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11100.000	41.65	4.78	46.43	-27.57	74.00	100	274	Peak
2	*	16650.000	55.59	6.14	61.72	-6.48	68.20	100	346	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-40MHz_Band3_TX_CH 134 ANT 0+1	Test Voltage	By Notebook PC

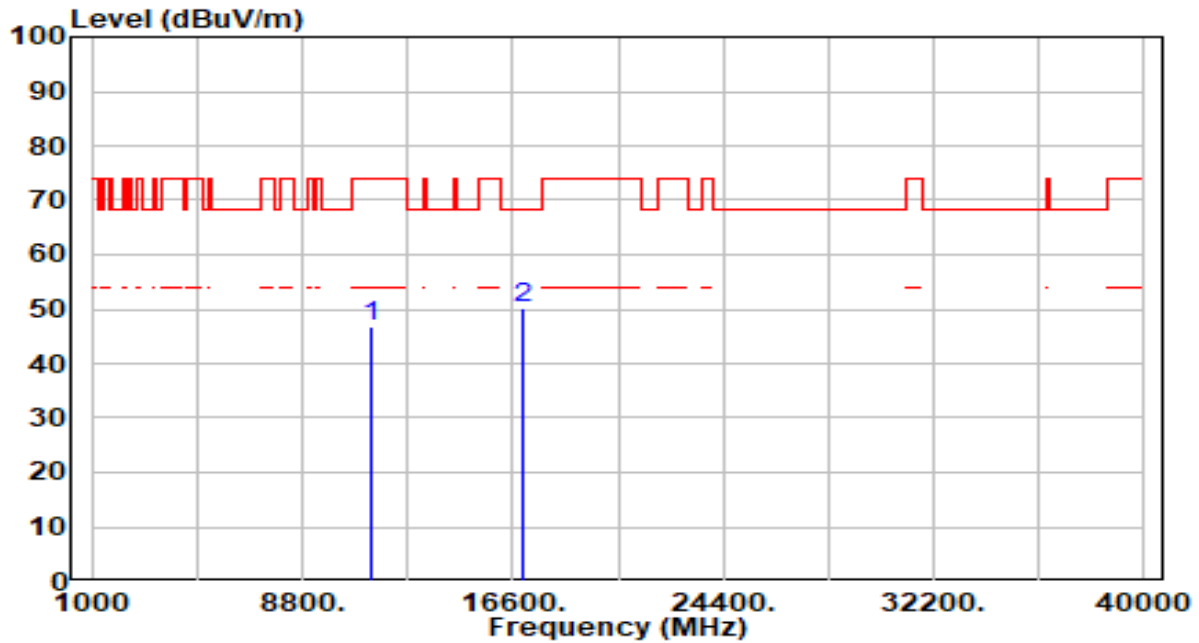


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11340.000	41.48	5.20	46.67	-27.33	74.00	100	360	Peak
2	* 17010.000	43.91	6.12	50.04	-18.16	68.20	100	350	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-40MHz_Band3_TX_CH 134 ANT 0+1	Test Voltage	By Notebook PC

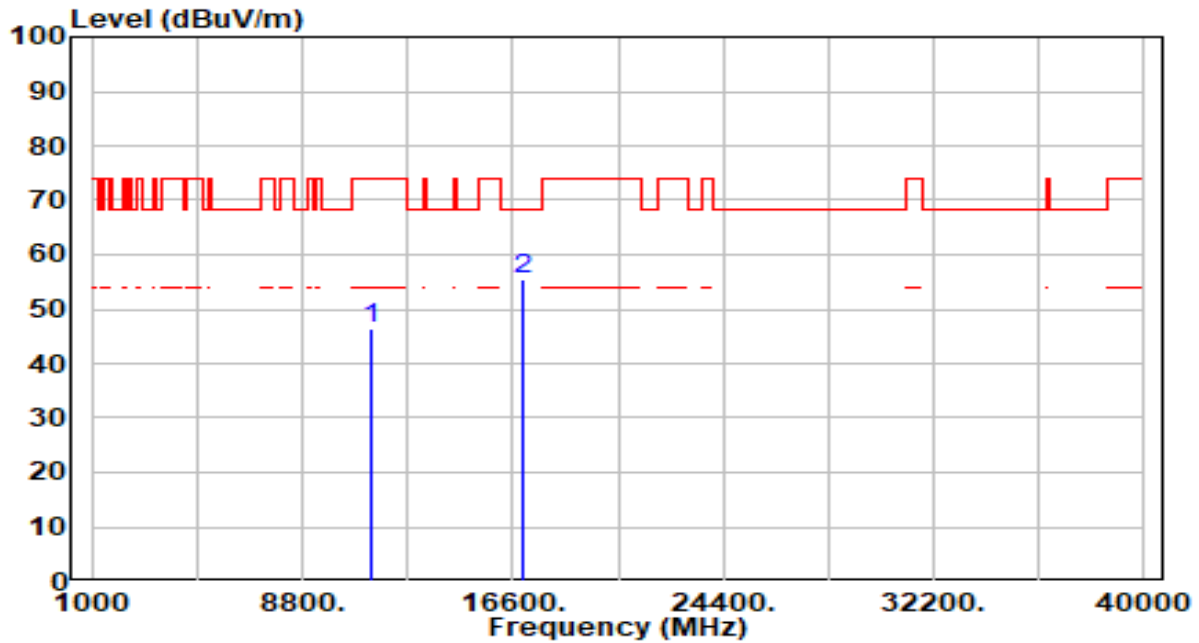


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11340.000	41.26	5.20	46.46	-27.54	74.00	100	42	Peak
2	*	17010.000	49.22	6.12	55.35	-12.85	68.20	100	339	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-40MHz_Band3_TX_CH 142 ANT 0+1	Test Voltage	By Notebook PC

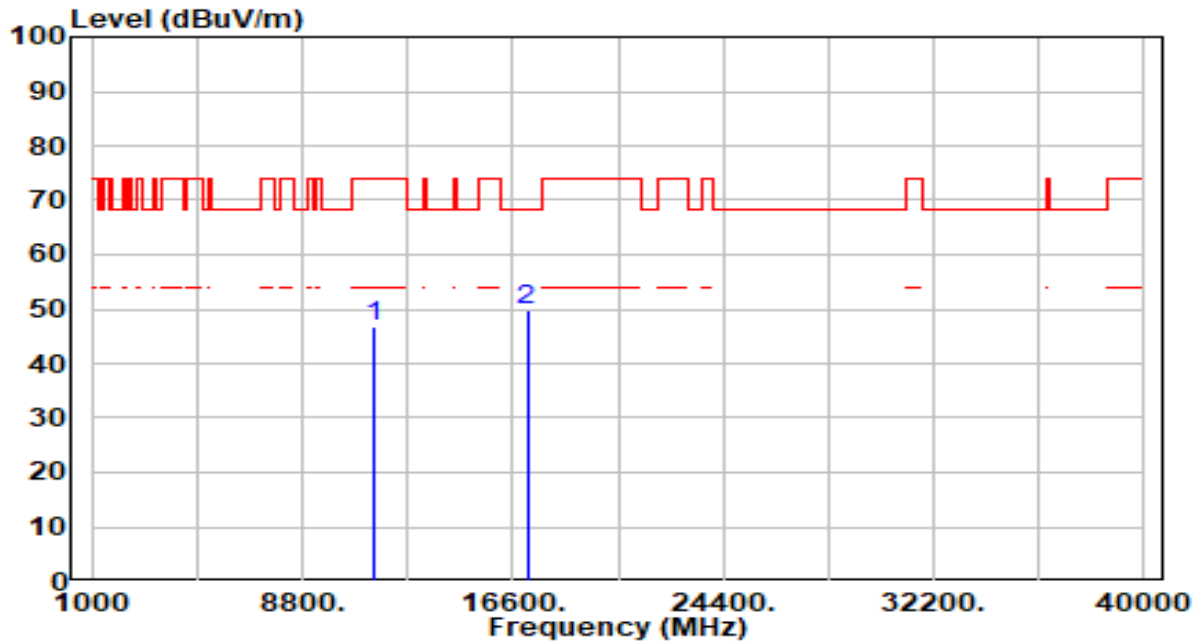


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11420.000	41.56	5.28	46.84	-27.16	74.00	100	149	Peak
2	*	17130.000	43.93	5.92	49.85	-18.35	68.20	100	355	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-40MHz_Band3_TX_CH 142 ANT 0+1	Test Voltage	By Notebook PC

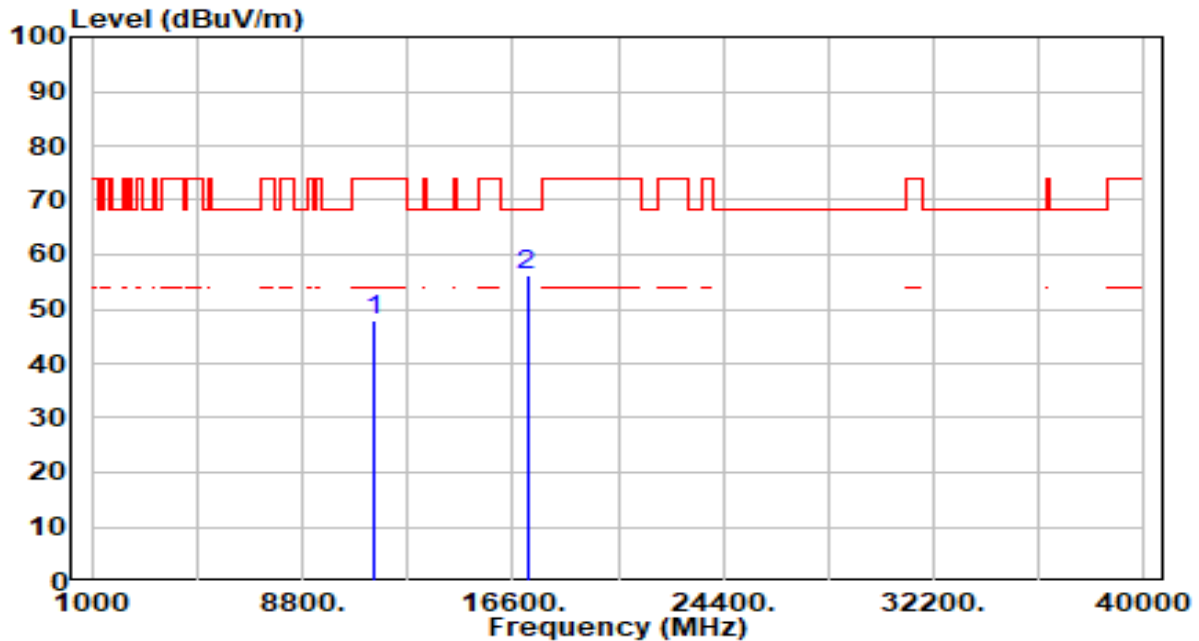


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11420.000	42.74	5.28	48.02	-25.98	74.00	100	0	Peak
2	* 17130.000	50.43	5.92	56.35	-11.85	68.20	100	0	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-40MHz_Band4_TX_CH 151 ANT 0+1	Test Voltage	By Notebook PC

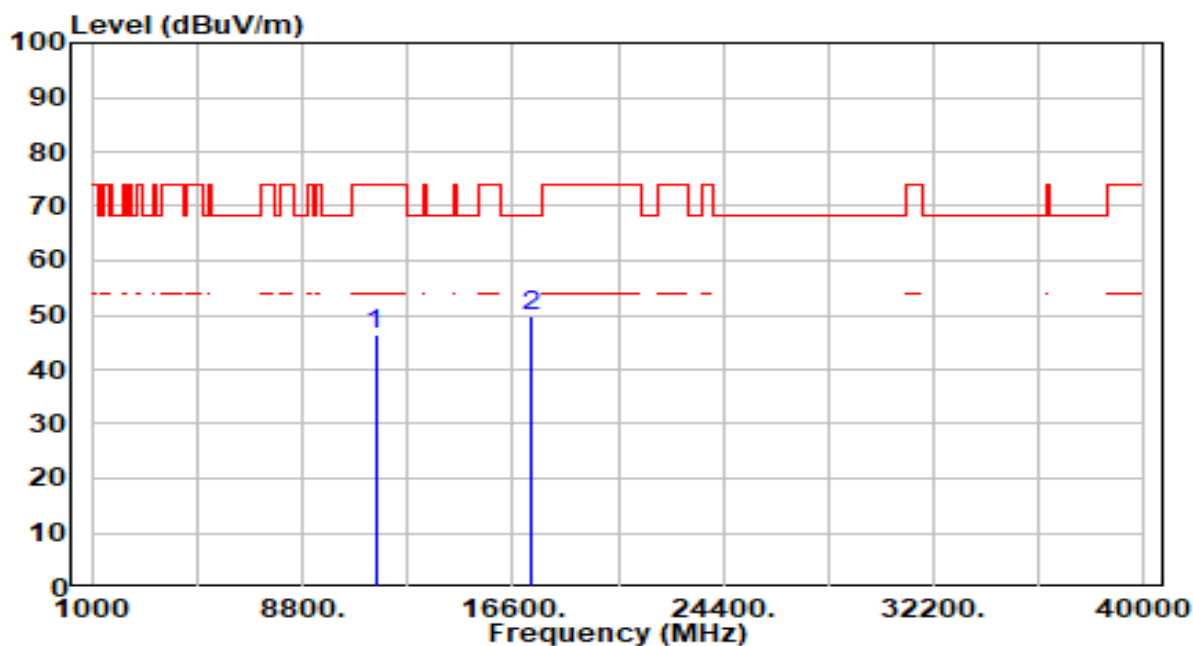


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11510.000	40.98	5.33	46.32	-27.68	74.00	100	59	Peak
2	*	17265.000	44.21	5.63	49.84	-18.36	68.20	100	288	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-40MHz_Band4_TX_CH 151 ANT 0+1	Test Voltage	By Notebook PC

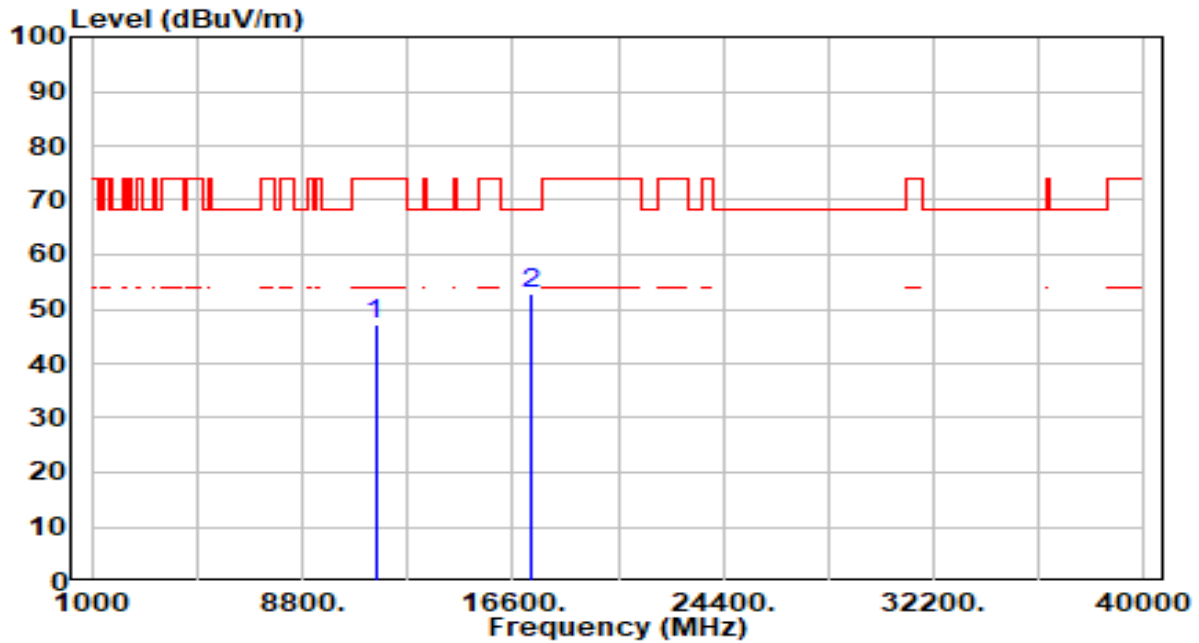


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11510.000	41.67	5.33	47.00	-27.00	74.00	100	252	Peak
2	* 17265.000	47.12	5.63	52.75	-15.45	68.20	100	340	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-40MHz_Band4_TX_CH 159 ANT 0+1	Test Voltage	By Notebook PC

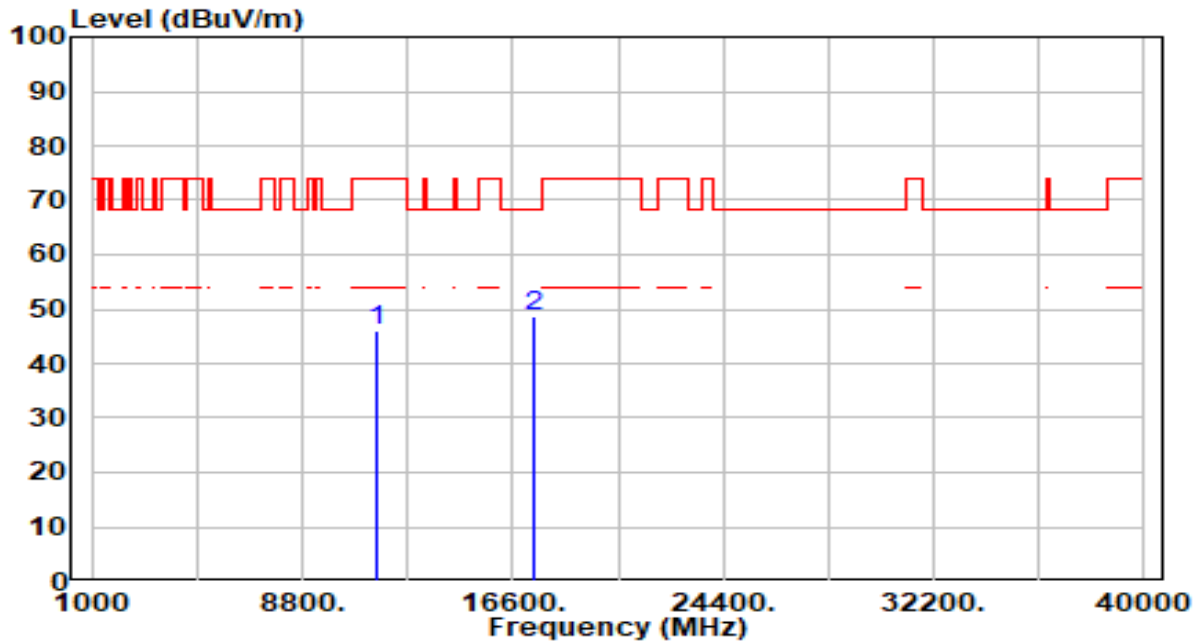


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11590.000	40.80	5.39	46.19	-27.81	74.00	100	87	Peak
2	* 17385.000	43.32	5.31	48.63	-19.57	68.20	100	289	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-40MHz_Band4_TX_CH 159 ANT 0+1	Test Voltage	By Notebook PC

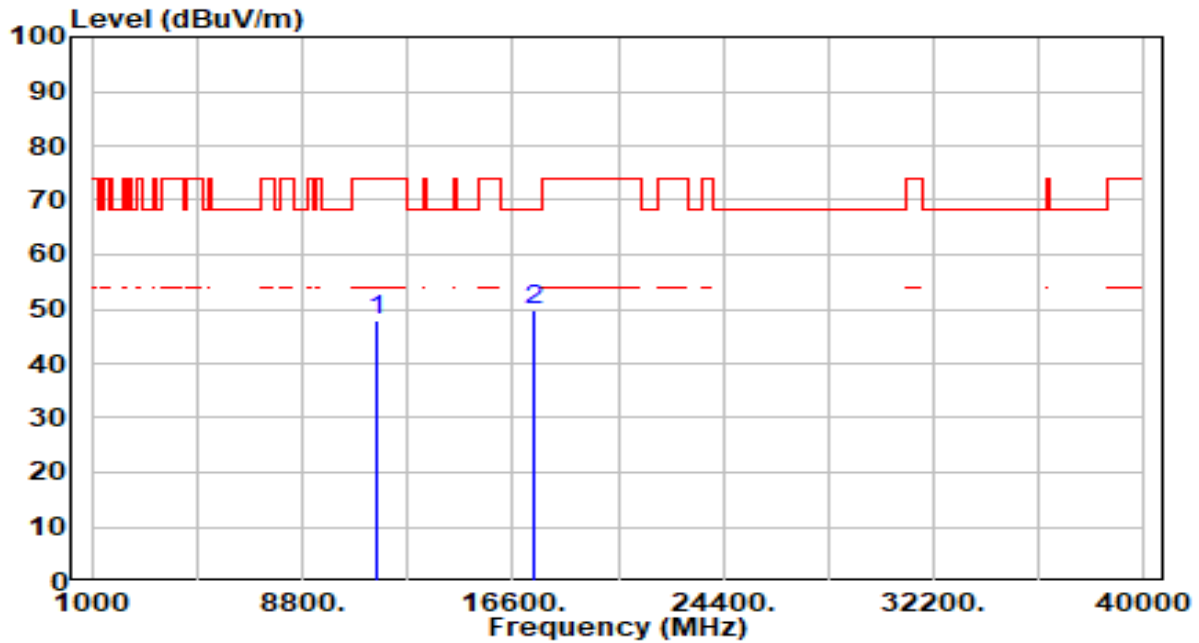


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11590.000	42.43	5.39	47.83	-26.17	74.00	100	173	Peak
2	* 17385.000	44.61	5.31	49.92	-18.28	68.20	100	0	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-80MHz_Band1_TX_CH 42 ANT 0+1	Test Voltage	By Notebook PC

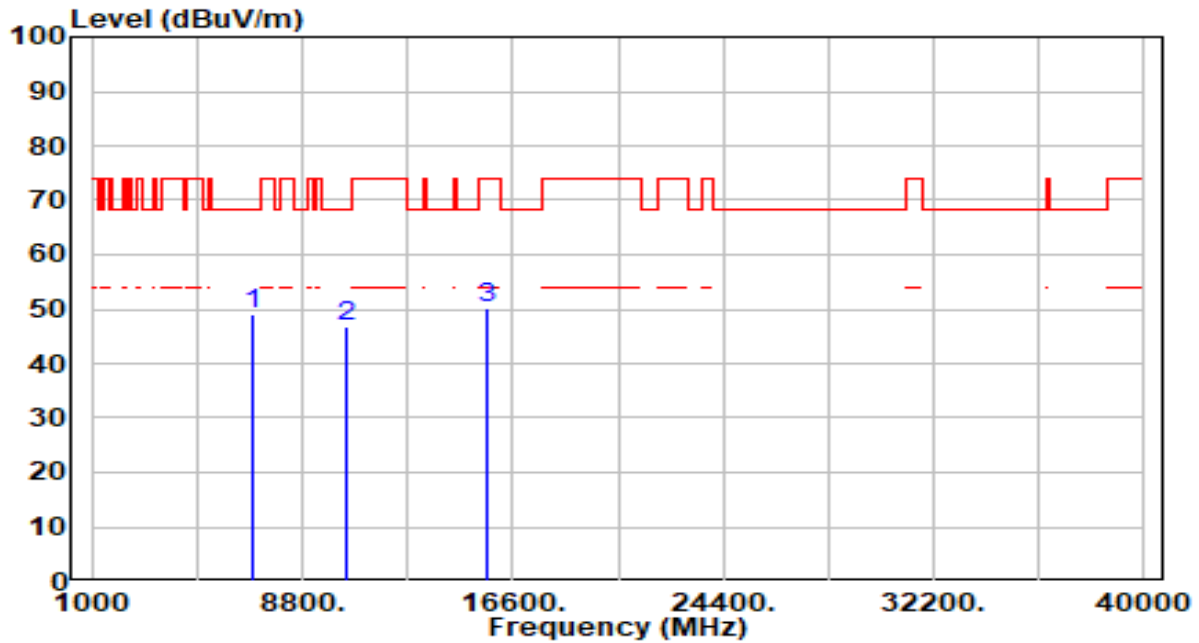


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	6947.000	43.82	5.39	49.21	-18.99	68.20	200	69	Peak
2		10420.000	41.98	4.79	46.77	-21.43	68.20	200	78	Peak
3		15630.000	44.16	6.21	50.36	-23.64	74.00	200	100	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-80MHz_Band1_TX_CH 42 ANT 0+1	Test Voltage	By Notebook PC

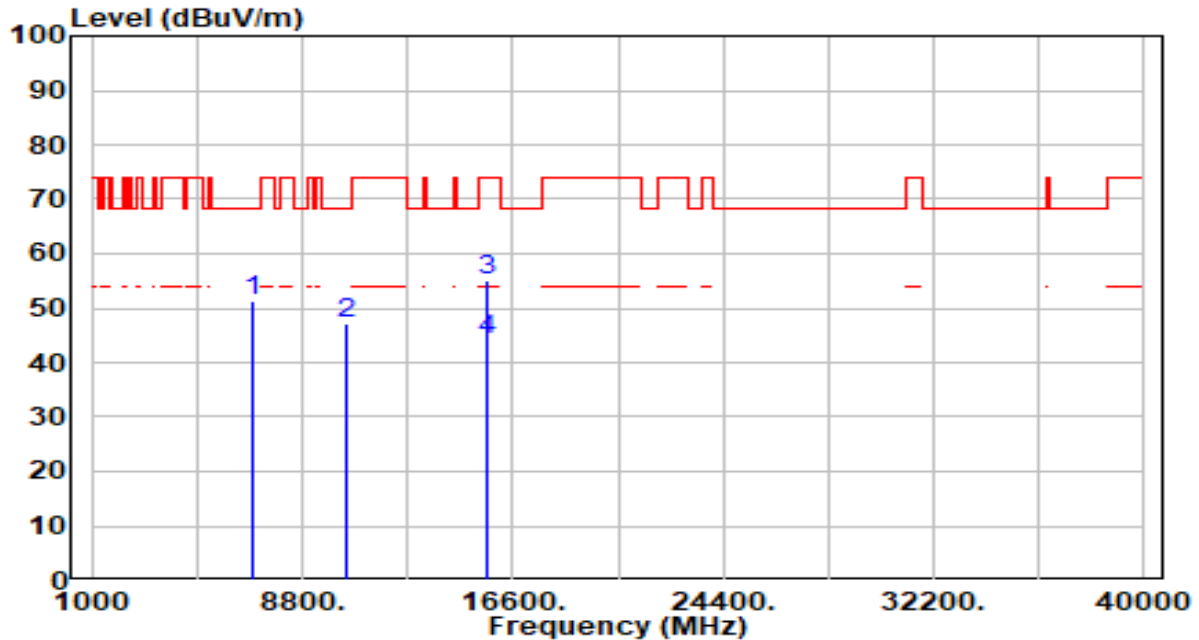


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	6946.000	45.84	5.39	51.24	-16.96	68.20	200	251	Peak
2		10420.000	42.37	4.79	47.16	-21.04	68.20	200	45	Peak
3		15630.000	48.87	6.21	55.08	-18.92	74.00	102	29	Peak
4	*	15630.000	38.09	6.21	44.30	-9.70	54.00	102	29	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-80MHz_Band2_TX_CH 58 ANT 0+1	Test Voltage	By Notebook PC

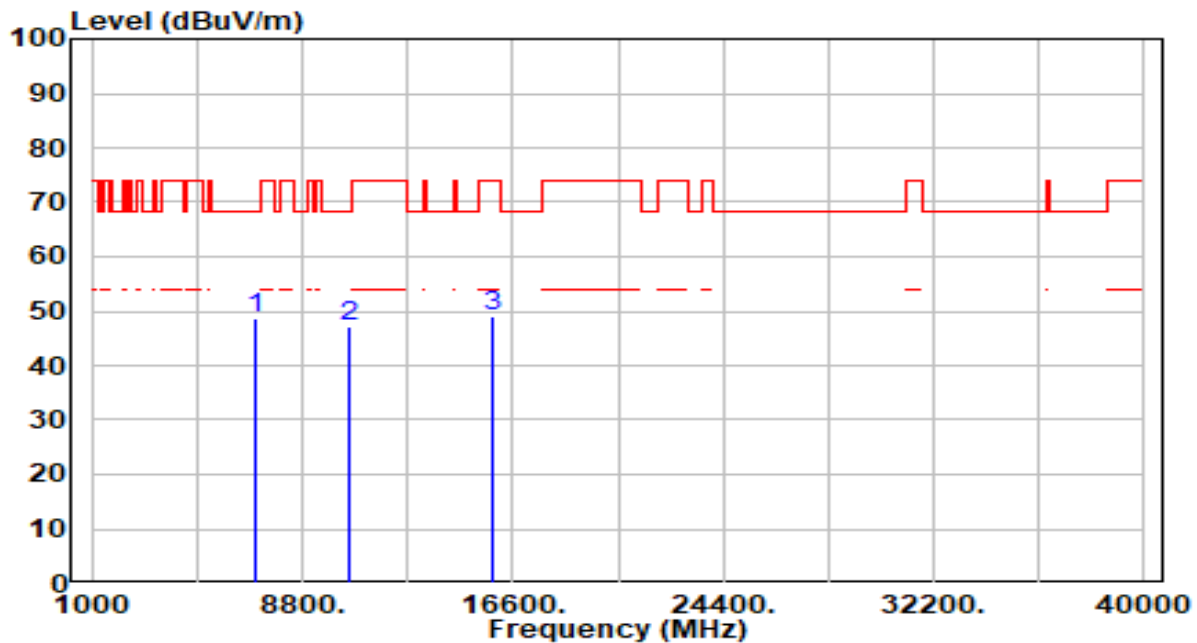


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	7053.000	43.12	5.43	48.55	-19.65	68.20	200	311	Peak
2		10580.000	42.47	4.63	47.09	-21.11	68.20	200	358	Peak
3		15870.000	42.49	6.55	49.03	-24.97	74.00	200	54	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-80MHz_Band2_TX_CH 58 ANT 0+1	Test Voltage	By Notebook PC

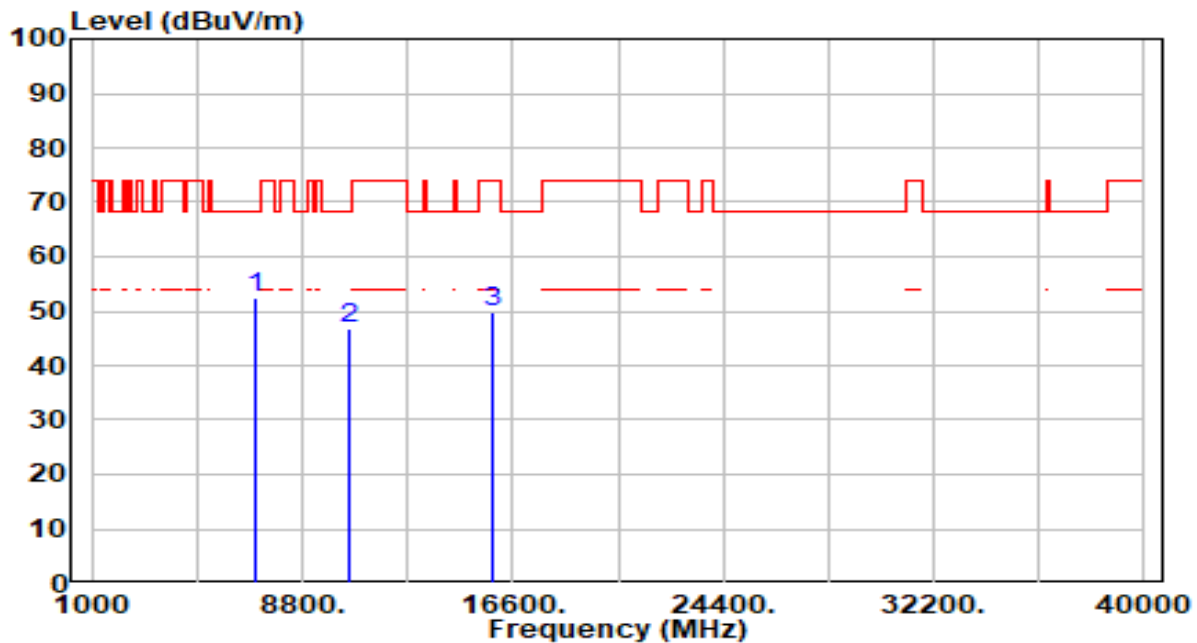


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	7053.000	47.07	5.43	52.50	-15.70	68.20	200	254	Peak
2		10580.000	42.15	4.63	46.78	-21.42	68.20	200	180	Peak
3		15870.000	43.40	6.55	49.95	-24.05	74.00	200	354	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-80MHz_Band3_TX_CH 106 ANT 0+1	Test Voltage	By Notebook PC

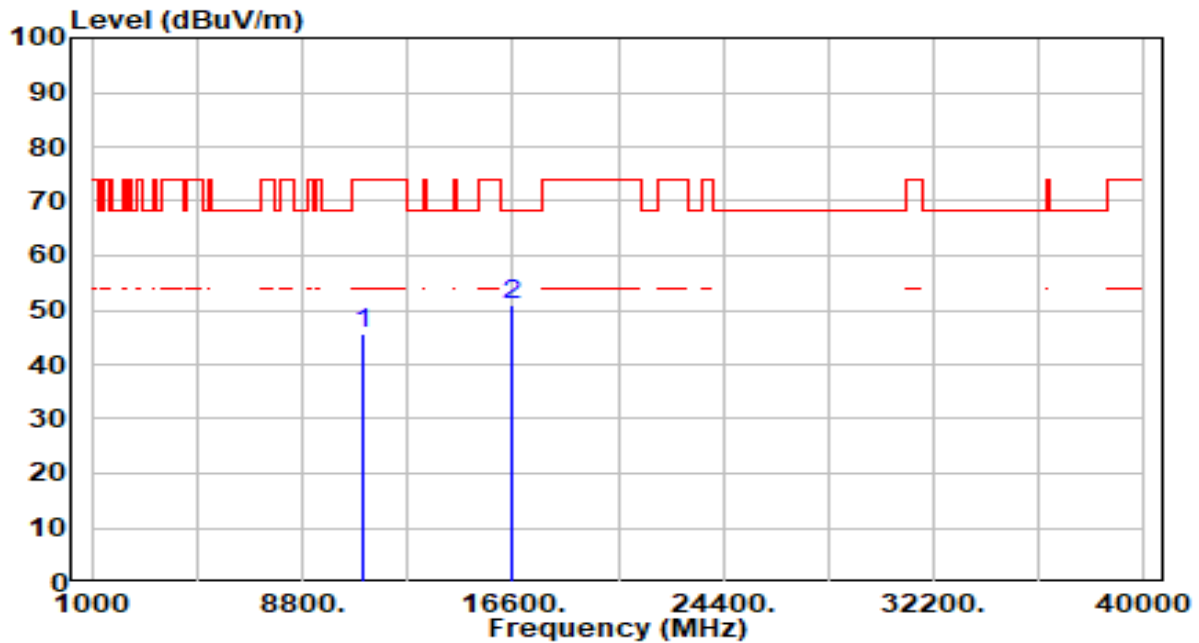


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11060.000	40.87	4.68	45.55	-28.45	74.00	100	192	Peak
2	*	16590.000	44.78	6.11	50.89	-17.31	68.20	100	349	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-80MHz_Band3_TX_CH 106 ANT 0+1	Test Voltage	By Notebook PC

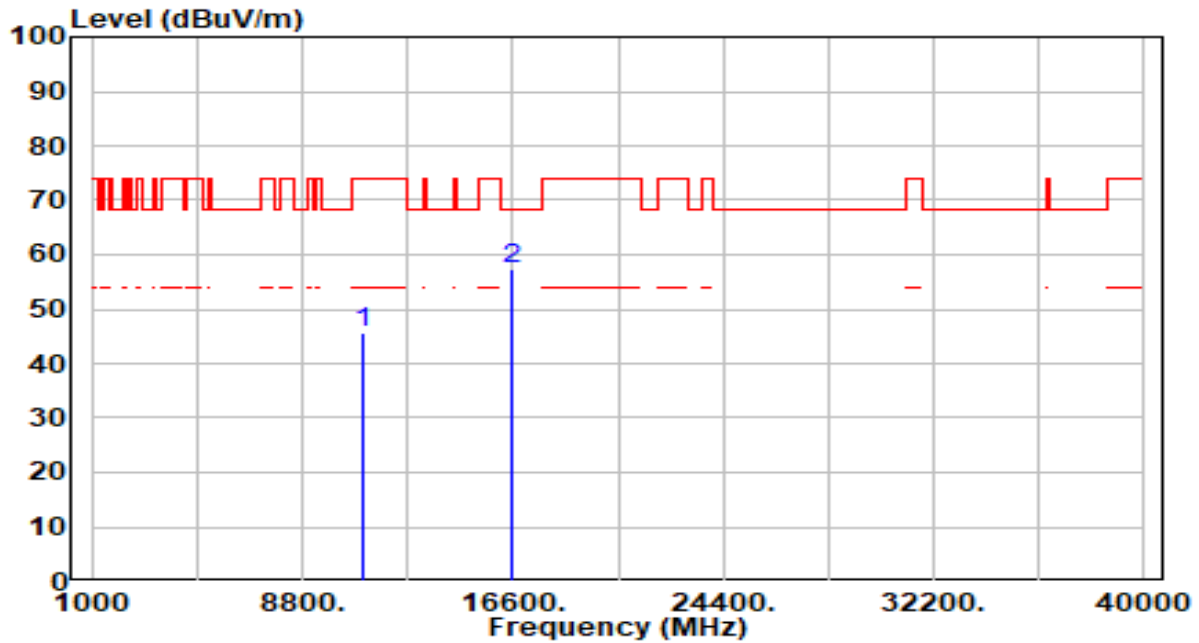


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11060.000	40.92	4.68	45.60	-28.40	74.00	100	161	Peak
2	* 16590.000	51.21	6.11	57.32	-10.88	68.20	100	30	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-80MHz_Band3_TX_CH 122 ANT 0+1	Test Voltage	By Notebook PC

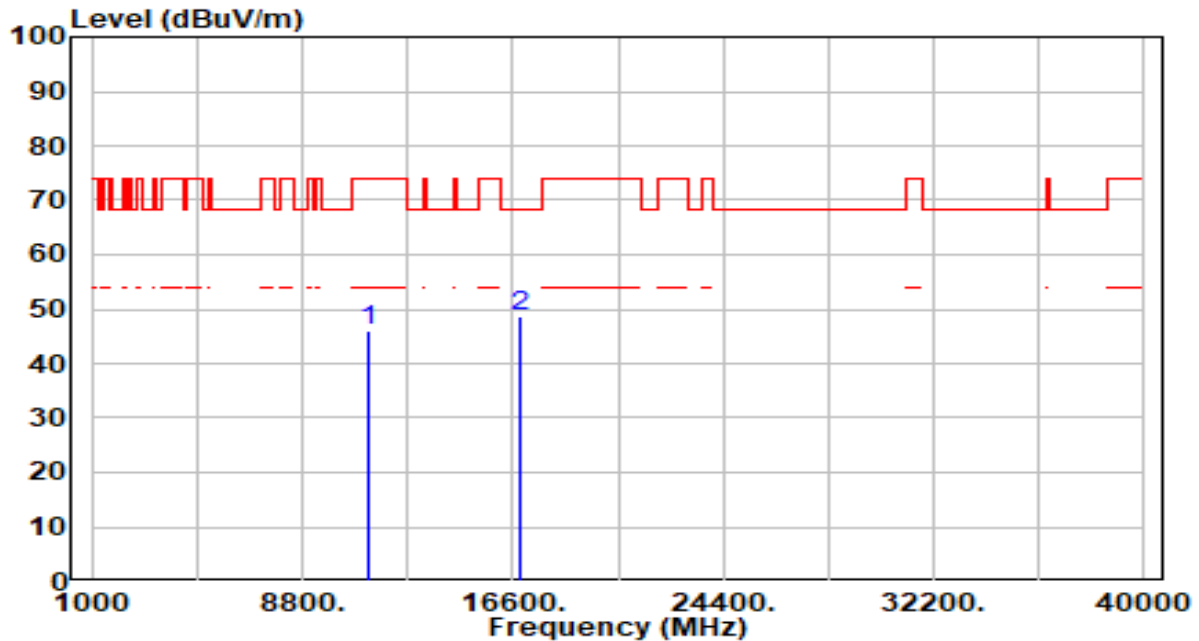


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11220.000	41.01	5.06	46.07	-27.93	74.00	100	105	Peak
2	* 16830.000	42.46	6.21	48.67	-19.53	68.20	100	282	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-80MHz_Band3_TX_CH 122 ANT 0+1	Test Voltage	By Notebook PC

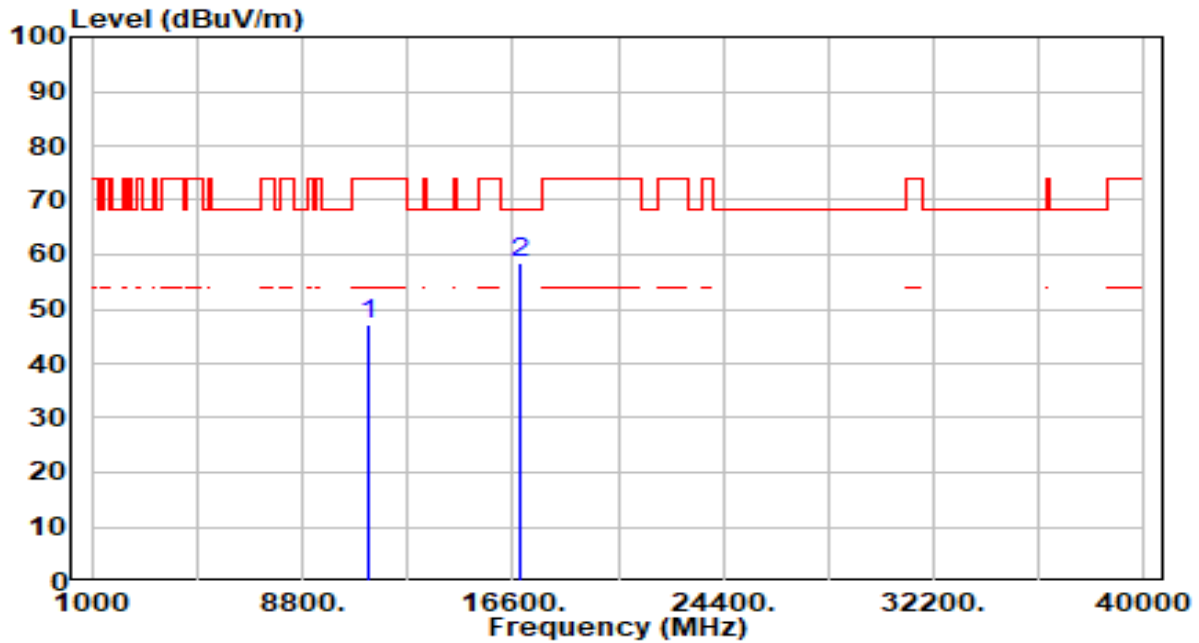


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11220.000	41.97	5.06	47.03	-26.97	74.00	100	106	Peak
2	* 16830.000	52.19	6.21	58.40	-9.80	68.20	100	0	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-80MHz_Band3_TX_CH 138 ANT 0+1	Test Voltage	By Notebook PC

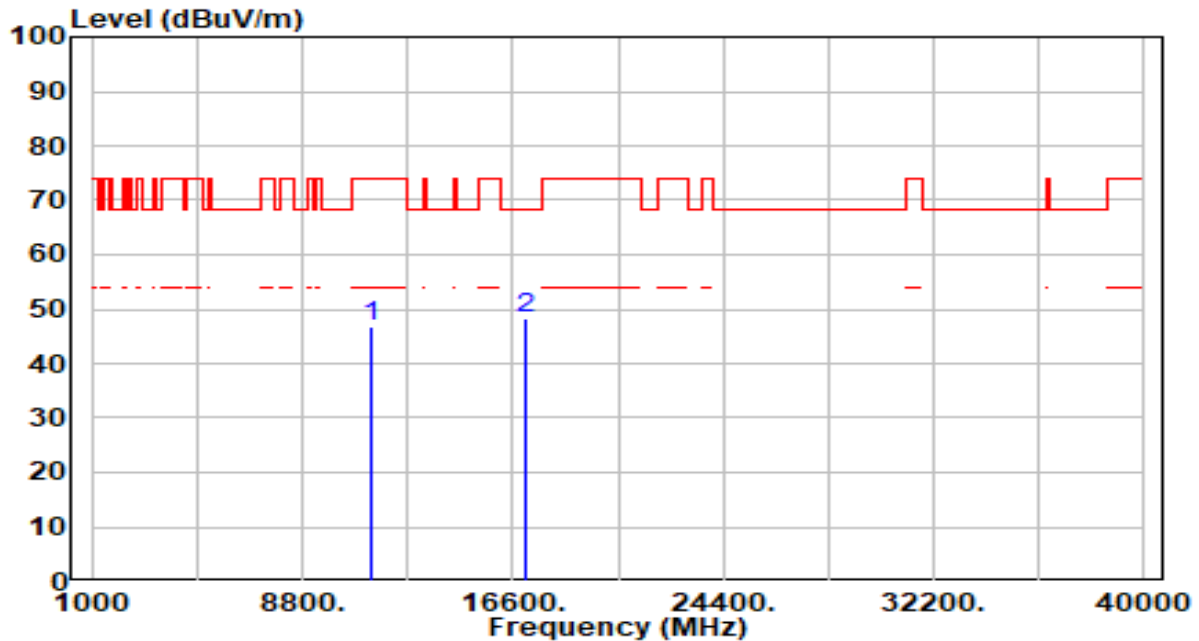


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11380.000	41.45	5.24	46.69	-27.31	74.00	100	338	Peak
2	* 17070.000	42.30	6.02	48.32	-19.88	68.20	100	318	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-80MHz_Band3_TX_CH 138 ANT 0+1	Test Voltage	By Notebook PC

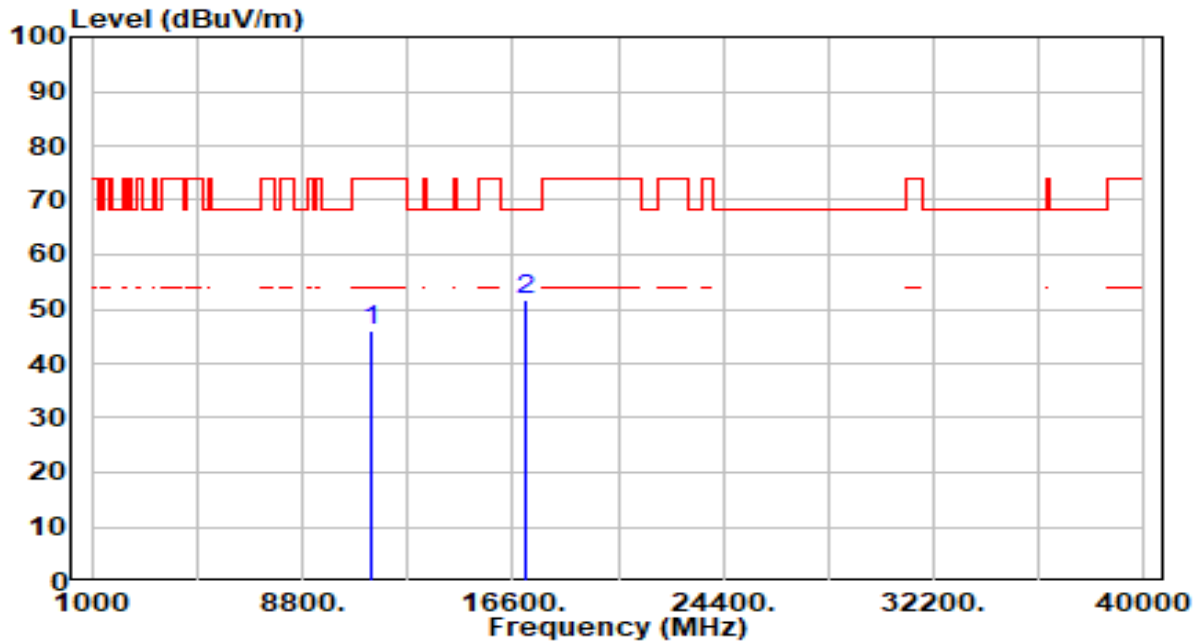


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11380.000	40.91	5.24	46.15	-27.85	74.00	100	87	Peak
2	*	17070.000	45.75	6.02	51.77	-16.43	68.20	100	336	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-80MHz_Band3_TX_CH 155 ANT 0+1	Test Voltage	By Notebook PC

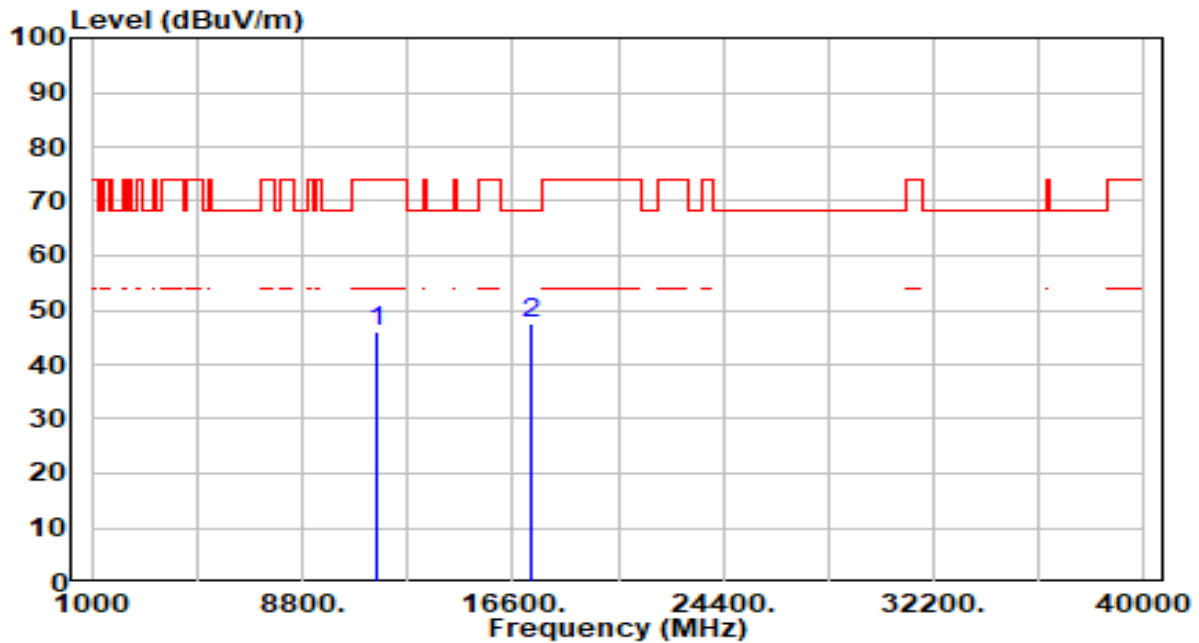


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11550.000	40.70	5.36	46.07	-27.93	74.00	100	0	Peak
2	*	17325.000	42.04	5.47	47.51	-20.69	68.20	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-80MHz_Band3_TX_CH 155 ANT 0+1	Test Voltage	By Notebook PC

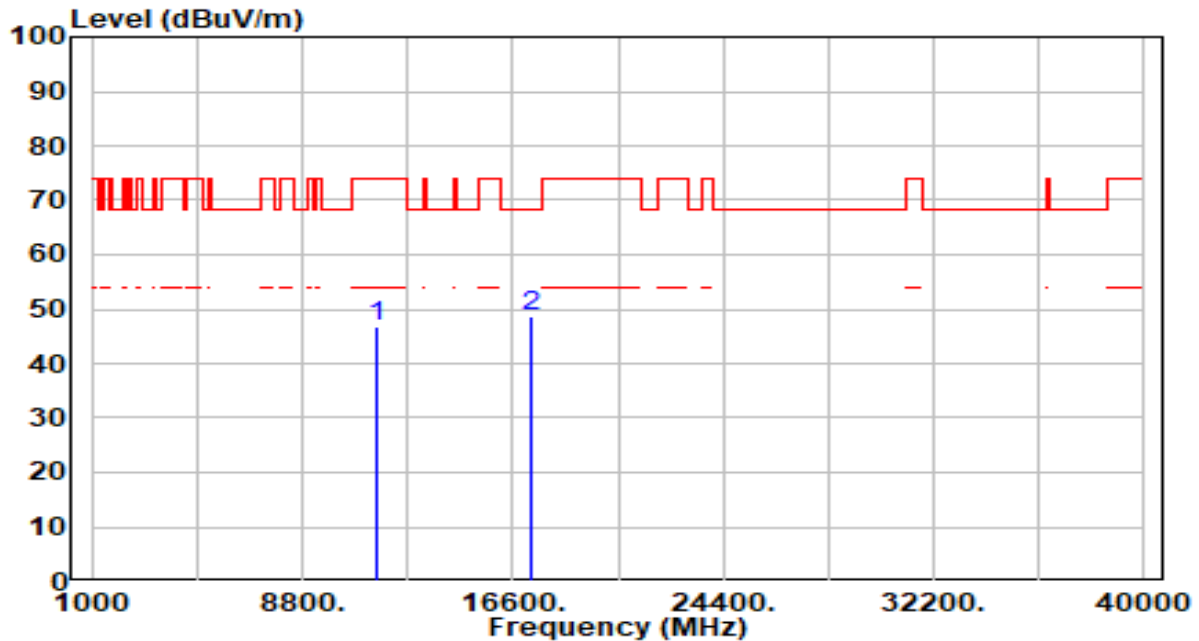


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11550.000	41.60	5.36	46.97	-27.03	74.00	100	245	Peak
2	* 17325.000	43.37	5.47	48.84	-19.36	68.20	100	49	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-160MHz_Band1,2_TX_CH 50 ANT 0+1	Test Voltage	By Notebook PC

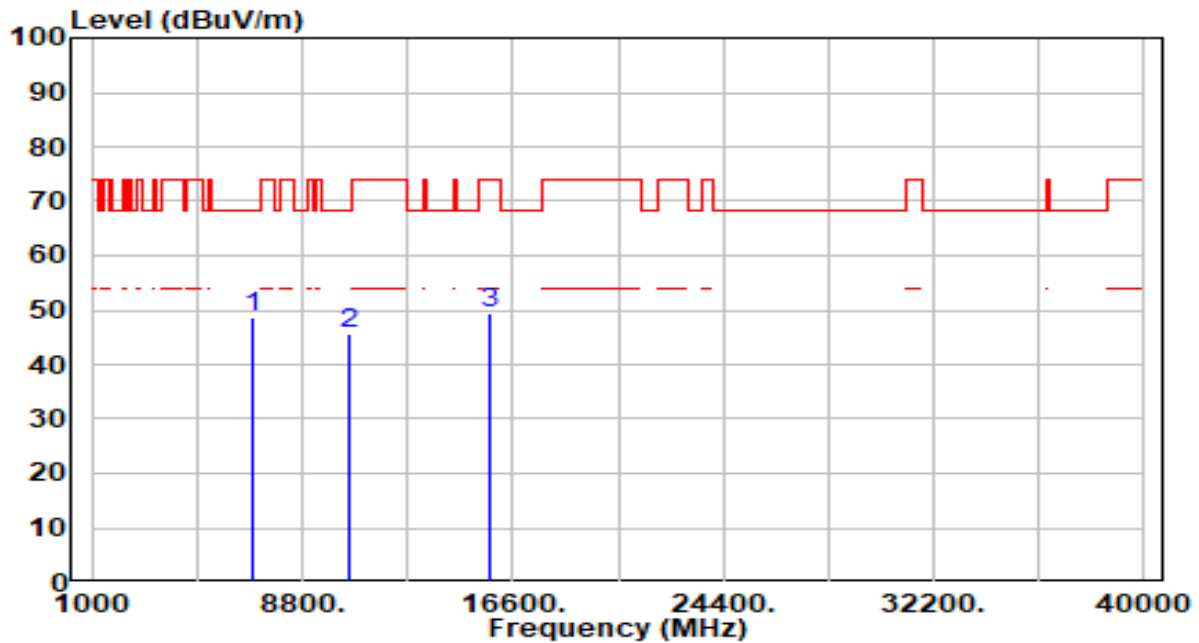


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	7000.000	43.43	5.40	48.83	-19.37	68.20	200	59	Peak
2		10500.000	41.02	4.68	45.70	-22.50	68.20	200	317	Peak
3		15750.000	43.08	6.45	49.53	-24.47	74.00	200	59	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-160MHz_Band1,2_TX_CH 50 ANT 0+1	Test Voltage	By Notebook PC

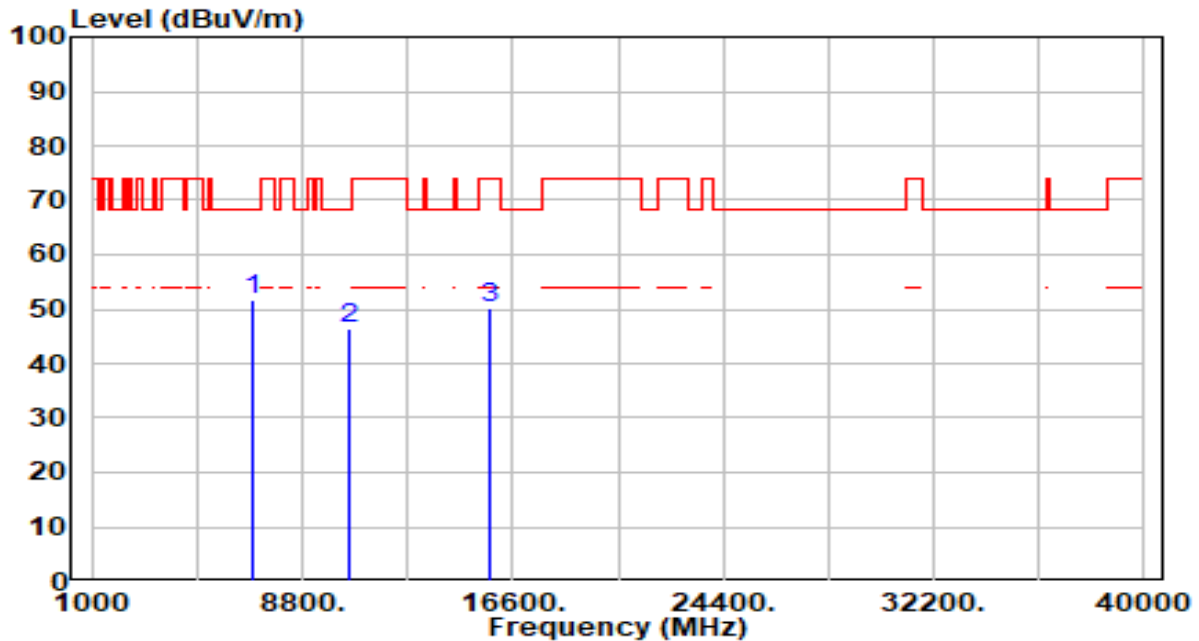


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	7000.000	46.34	5.40	51.74	-16.46	68.20	200	250	Peak
2		10500.000	41.72	4.68	46.41	-21.79	68.20	200	0	Peak
3		15750.000	43.73	6.45	50.18	-23.82	74.00	200	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-160MHz_Band3_TX_CH 114 ANT 0+1	Test Voltage	By Notebook PC

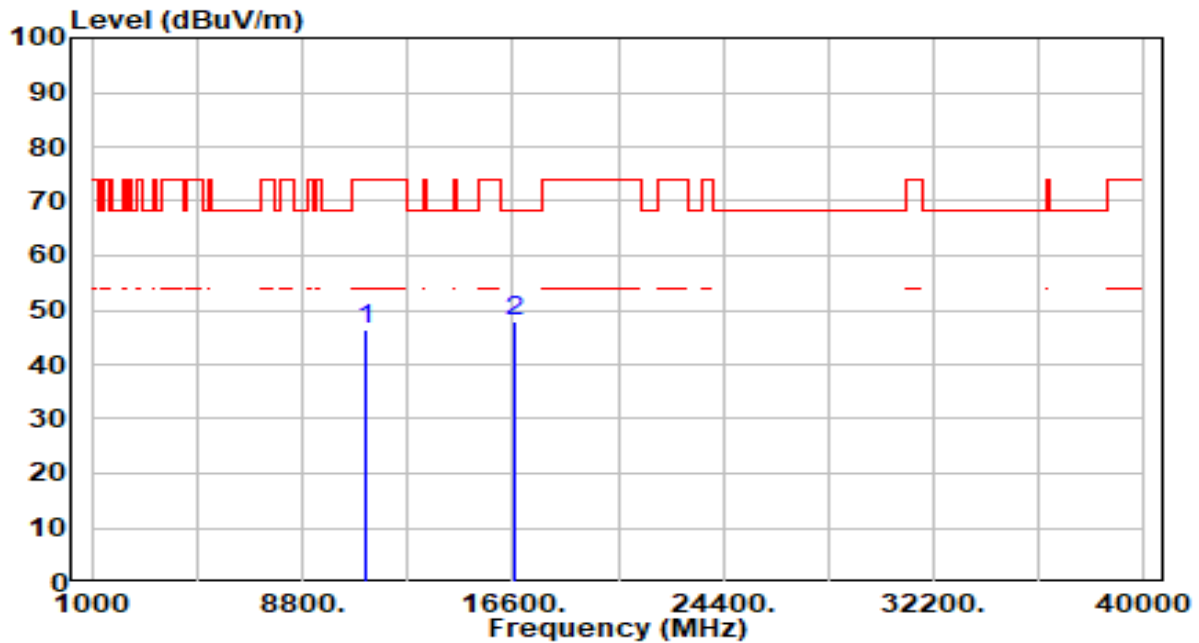


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11140.000	41.61	4.89	46.49	-27.51	74.00	200	118	Peak
2	*	16710.000	41.63	6.17	47.80	-20.40	68.20	200	146	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-160MHz_Band3_TX_CH 114 ANT 0+1	Test Voltage	By Notebook PC

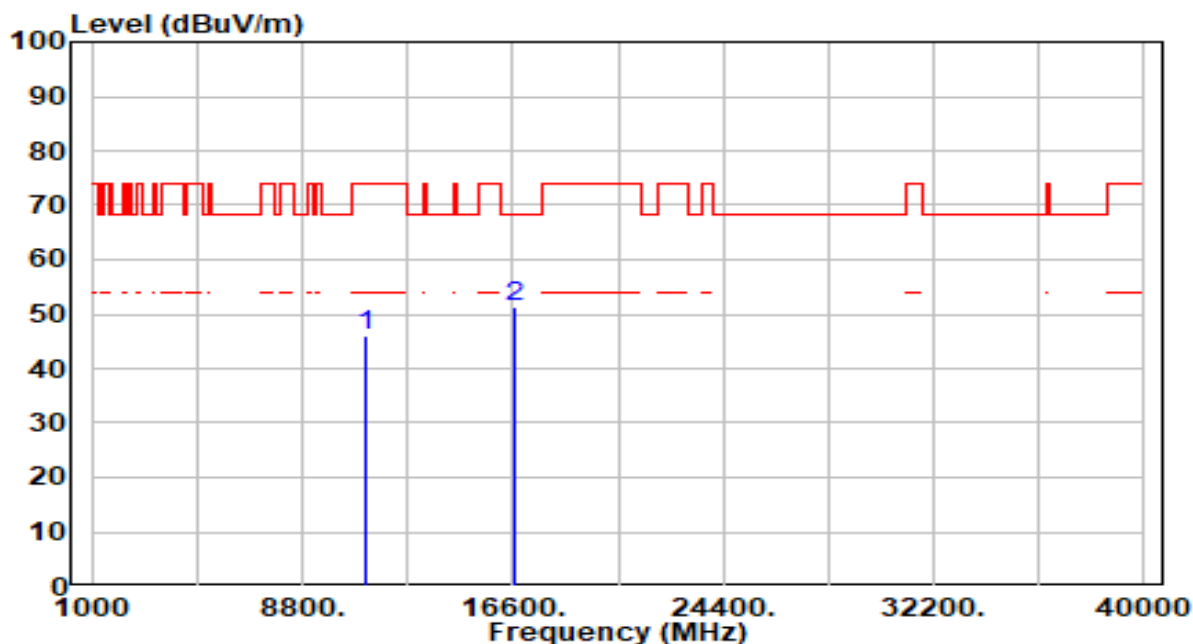


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11140.000	41.23	4.89	46.12	-27.88	74.00	200	143	Peak
2	*	16710.000	45.24	6.17	51.41	-16.79	68.20	200	340	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_Band1_TX_CH 36 ANT 0+1	Test Voltage	By Notebook PC

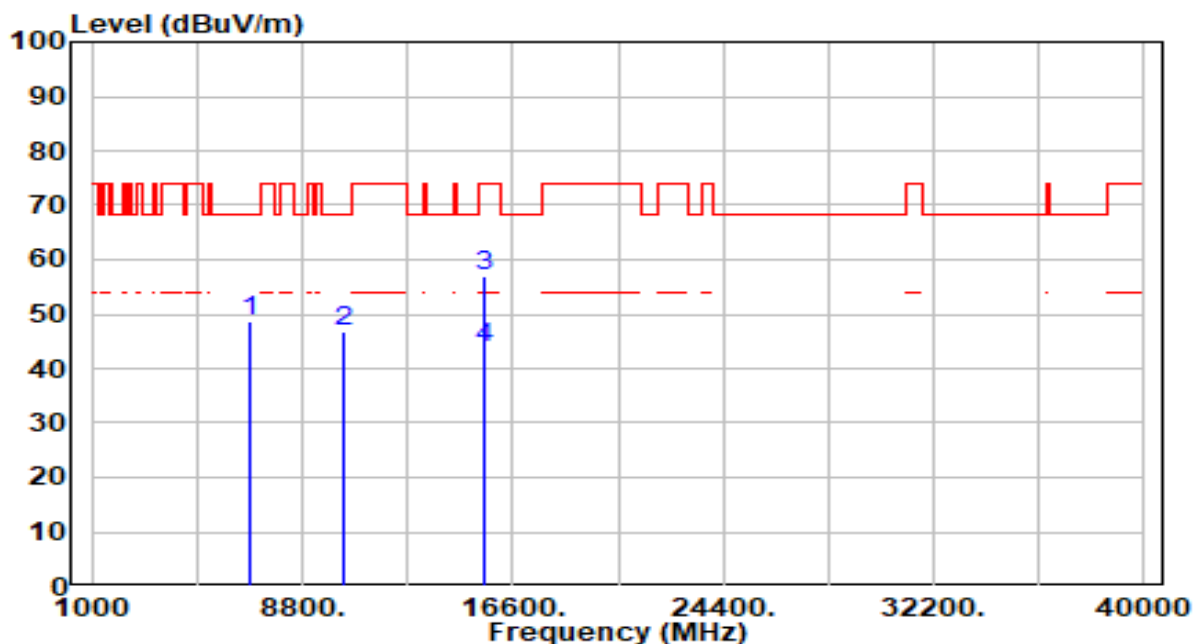


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	6907.000	43.21	5.39	48.59	-19.61	68.20	200	306	Peak
2	10360.000	41.96	4.87	46.83	-21.37	68.20	200	332	Peak
3	* 15540.000	50.69	6.21	56.90	-17.10	74.00	200	56	Peak
4	* 15540.000	37.45	6.21	43.66	-10.34	54.00	200	56	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_Band1_TX_CH 36 ANT 0+1	Test Voltage	By Notebook PC

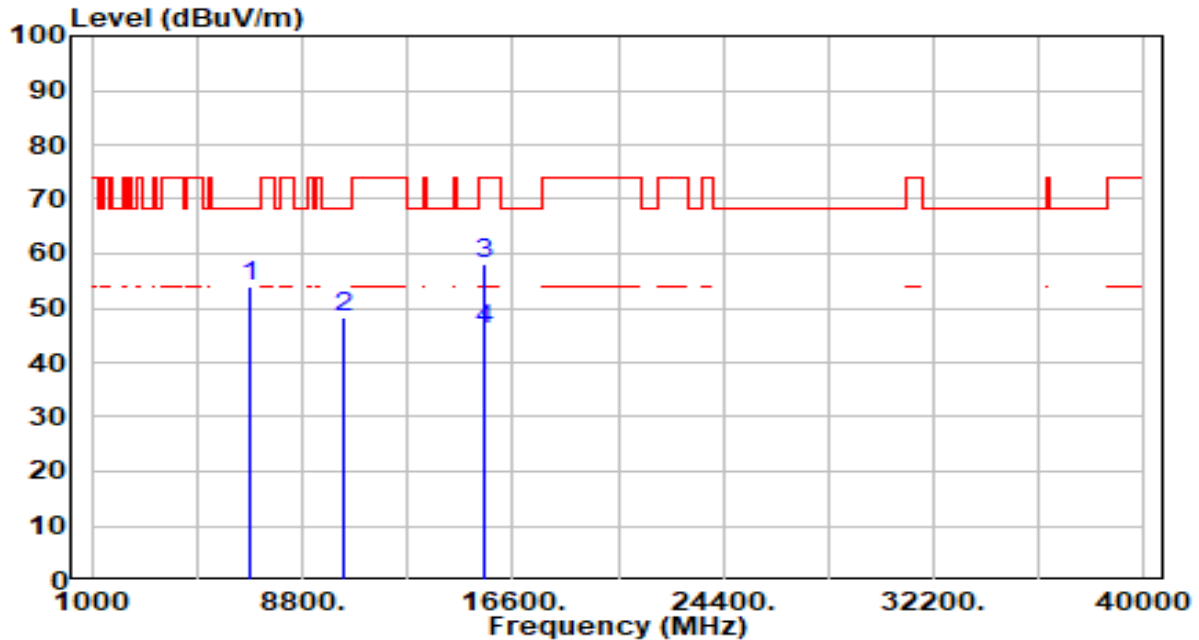


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	6907.000	48.50	5.39	53.88	-14.32	68.20	200	252	Peak
2		10360.000	43.37	4.87	48.24	-19.96	68.20	200	295	Peak
3		15540.000	52.07	6.21	58.28	-15.72	74.00	200	0	Peak
4	*	15540.000	39.87	6.21	46.08	-7.92	54.00	200	0	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_Band1_TX_CH 40 ANT 0+1	Test Voltage	By Notebook PC

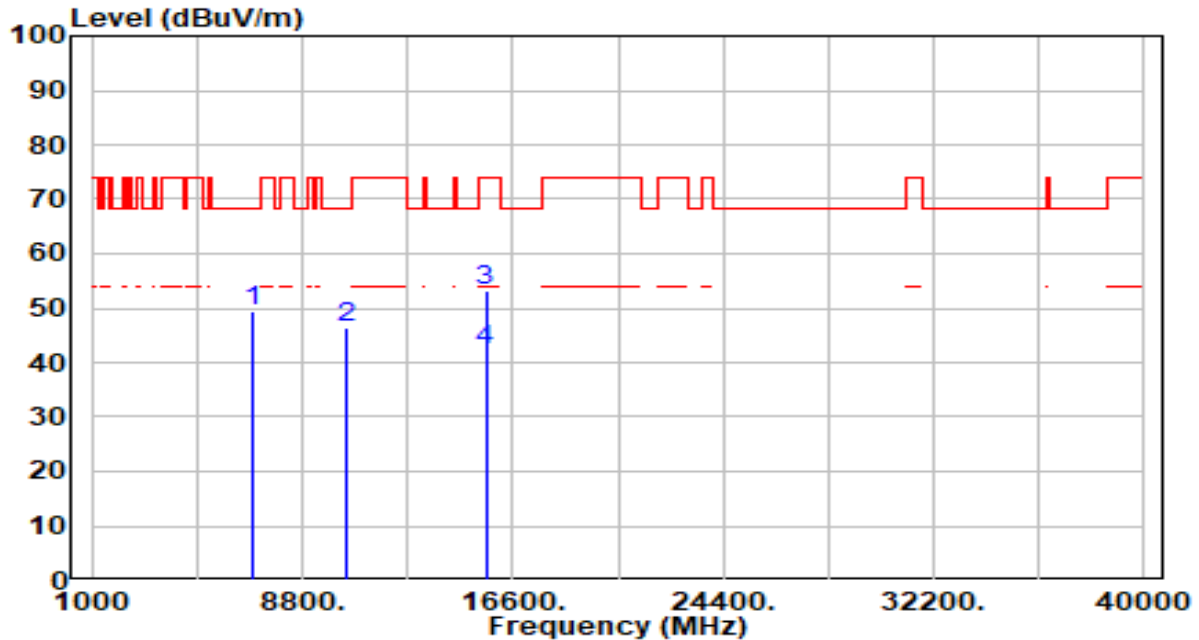


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	6933.000	44.11	5.39	49.50	-18.70	68.20	200	247	Peak
2		10400.000	41.60	4.82	46.41	-21.79	68.20	200	188	Peak
3		15600.000	47.03	6.15	53.18	-20.82	74.00	200	65	Peak
4	*	15600.000	36.03	6.15	42.18	-11.82	54.00	200	65	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_Band1_TX_CH 40 ANT 0+1	Test Voltage	By Notebook PC

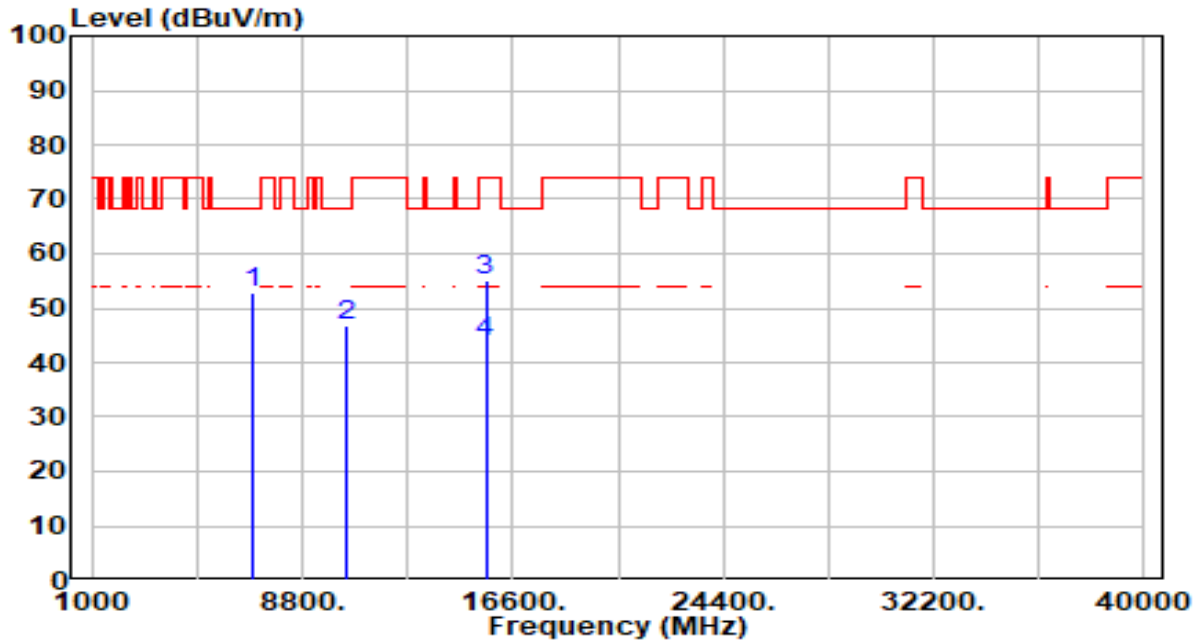


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	6933.000	47.62	5.39	53.01	-15.19	68.20	200	254	Peak
2		10400.000	41.96	4.82	46.78	-21.42	68.20	200	328	Peak
3		15600.000	48.80	6.15	54.94	-19.06	74.00	200	360	Peak
4	*	15600.000	37.70	6.15	43.85	-10.15	54.00	200	360	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_Band1_TX_CH 48 ANT 0+1	Test Voltage	By Notebook PC

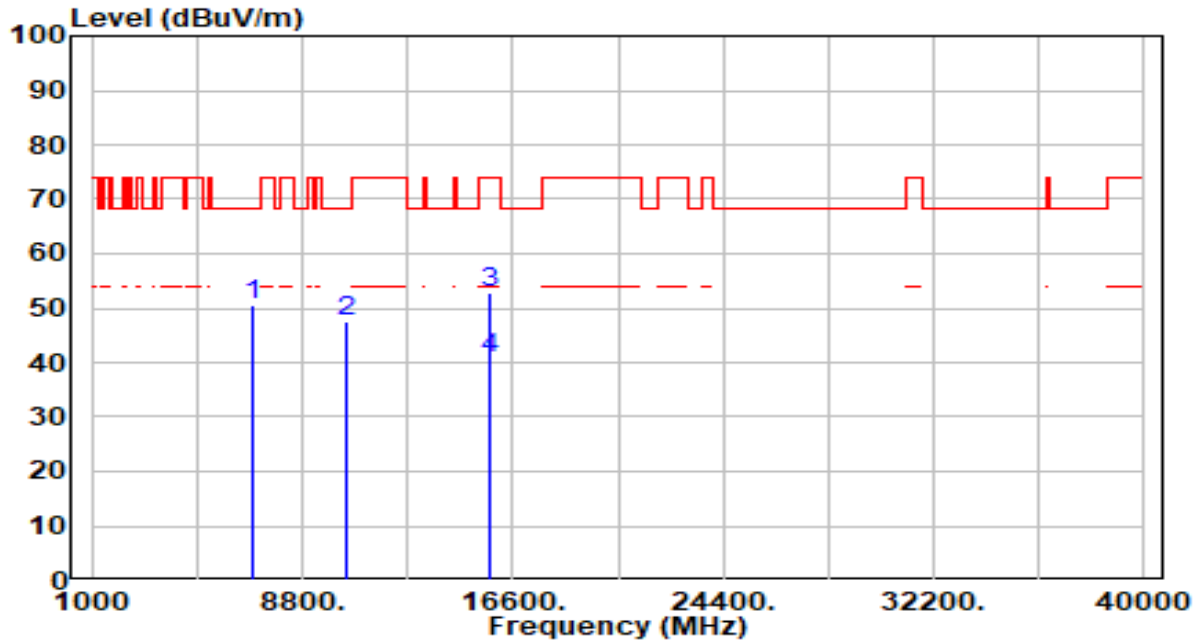


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	6987.000	45.05	5.40	50.45	-17.75	68.20	200	312	Peak
2		10480.000	42.86	4.71	47.57	-20.63	68.20	200	41	Peak
3		15720.000	46.32	6.39	52.71	-21.29	74.00	200	84	Peak
4	*	15720.000	34.32	6.39	40.71	-13.29	54.00	200	84	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_Band1_TX_CH 48 ANT 0+1	Test Voltage	By Notebook PC

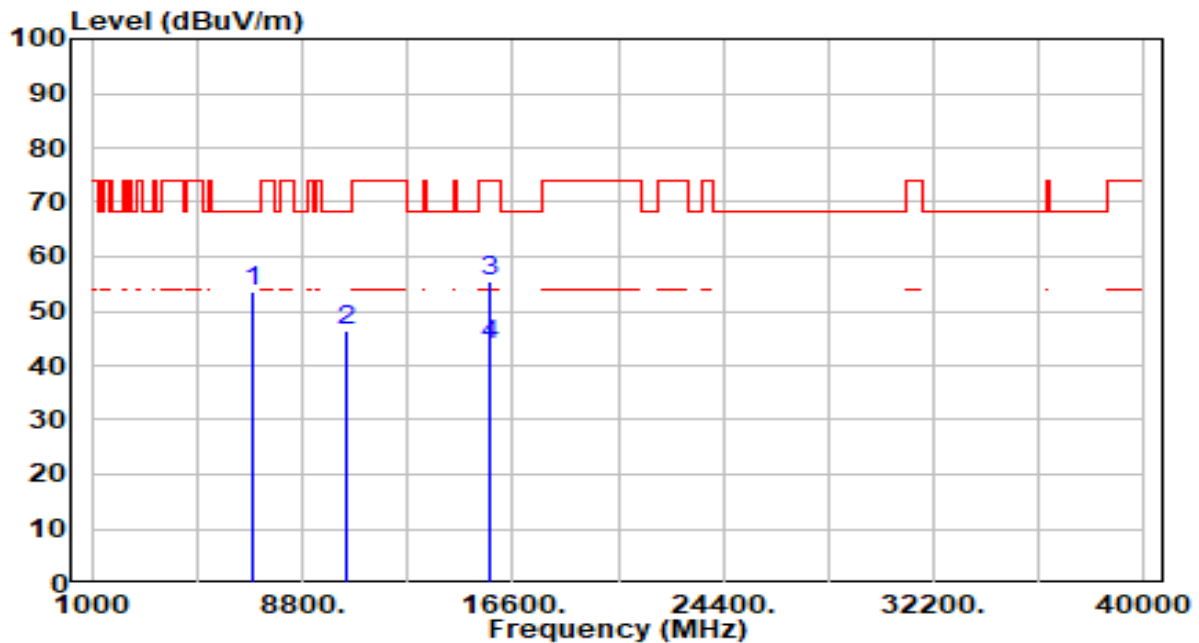


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	6987.000	48.35	5.40	53.74	-14.46	68.20	200	253	Peak
2		10480.000	41.78	4.71	46.49	-21.71	68.20	200	5	Peak
3		15720.000	48.99	6.39	55.37	-18.63	74.00	200	0	Peak
4	*	15720.000	37.48	6.39	43.87	-10.13	54.00	200	0	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_Band2_TX_CH 52 ANT 0+1	Test Voltage	By Notebook PC

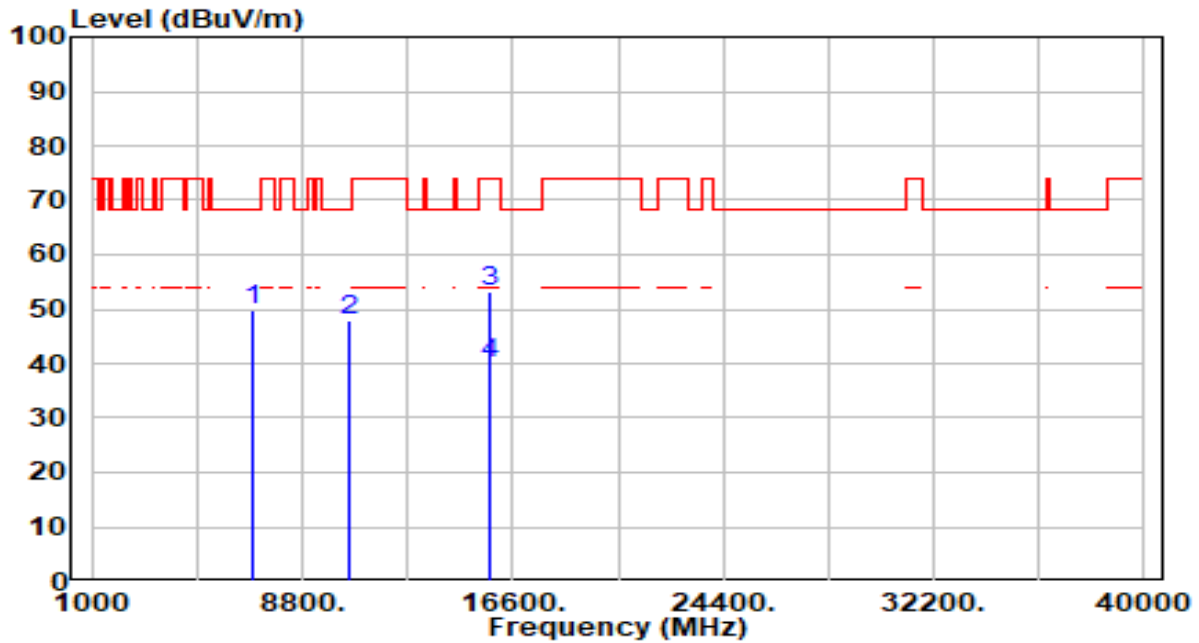


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	7013.000	44.50	5.41	49.91	-18.29	68.20	200	305	Peak
2		10520.000	43.39	4.67	48.06	-20.14	68.20	200	30	Peak
3		15780.000	46.65	6.51	53.16	-20.84	74.00	200	84	Peak
4	*	15780.000	33.50	6.51	40.01	-13.99	54.00	200	84	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_Band2_TX_CH 52 ANT 0+1	Test Voltage	By Notebook PC

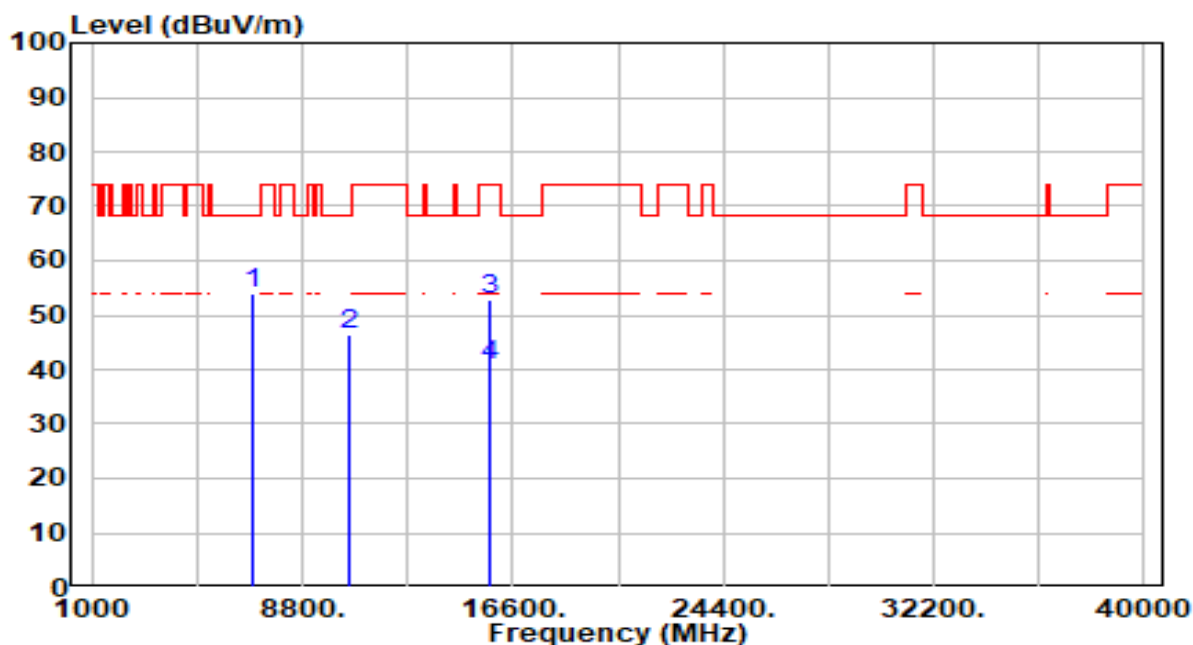


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	7013.000	48.62	5.41	54.03	-14.17	68.20	200	252	Peak
2		10520.000	41.75	4.67	46.42	-21.78	68.20	200	0	Peak
3		15780.000	46.41	6.51	52.92	-21.08	74.00	200	0	Peak
4	*	15780.000	34.13	6.51	40.64	-13.36	54.00	200	0	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_Band2_TX_CH 60 ANT 0+1	Test Voltage	By Notebook PC

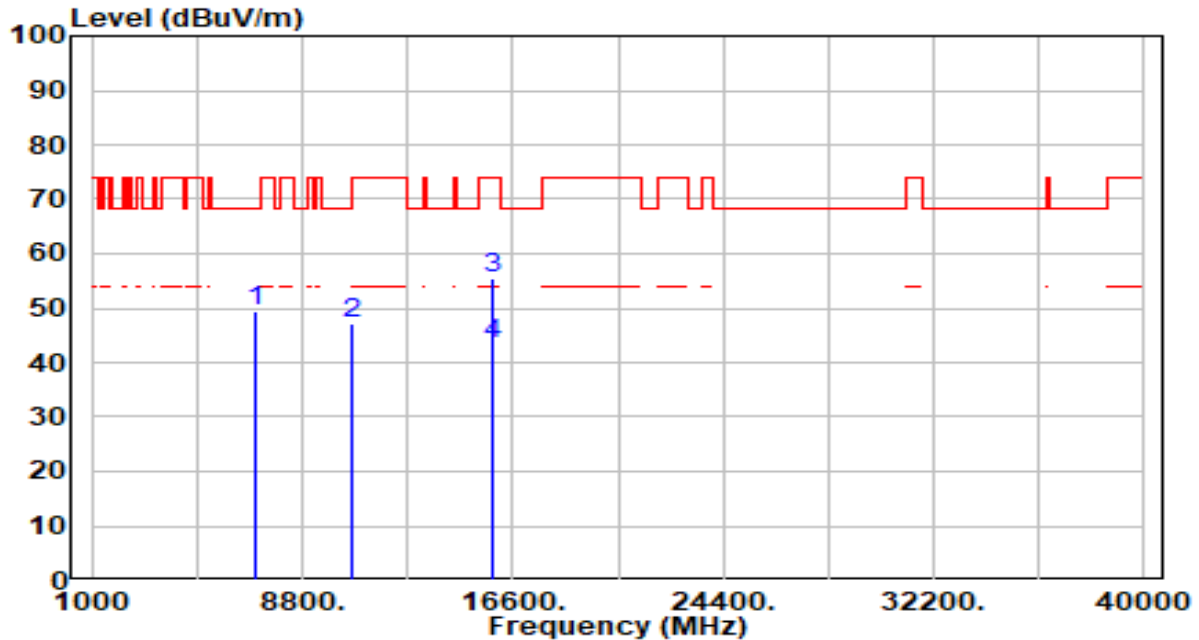


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7067.000	43.93	5.44	49.37	-18.83	68.20	200	313	Peak
2	10600.000	42.61	4.61	47.22	-20.98	68.20	200	30	Peak
3	* 15900.000	48.90	6.55	55.45	-18.55	74.00	200	82	Peak
4	* 15900.000	36.90	6.55	43.45	-10.55	54.00	200	82	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_Band2_TX_CH 60 ANT 0+1	Test Voltage	By Notebook PC

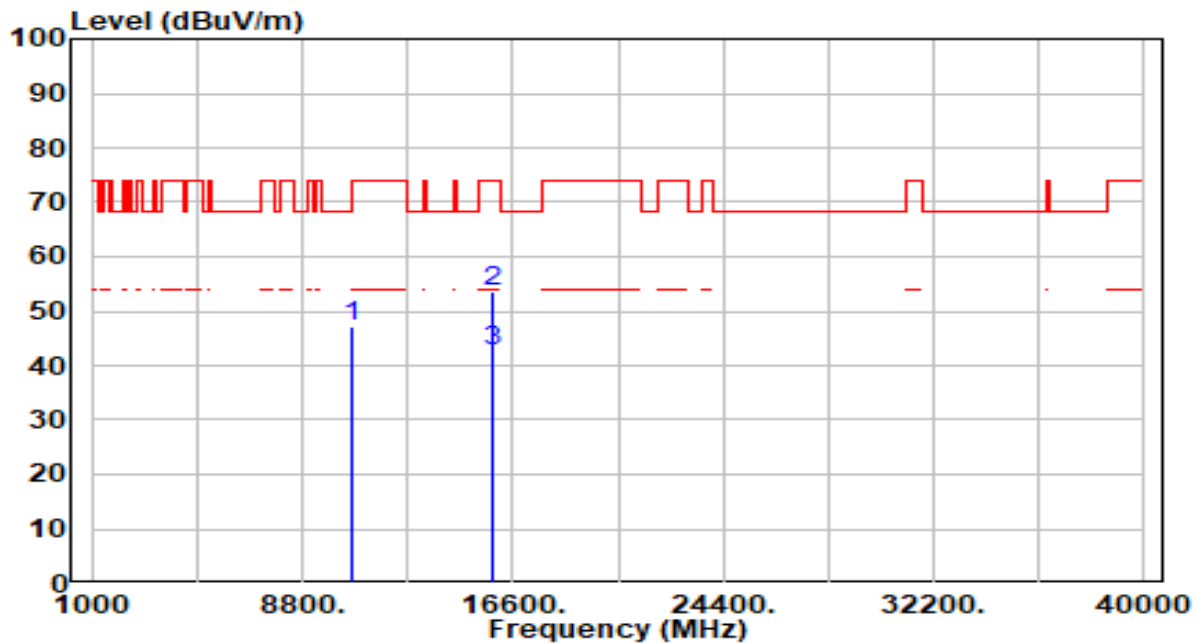


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10600.000	42.66	4.61	47.27	-20.93	68.20	200	338	Peak
2	15900.000	47.05	6.55	53.60	-20.40	74.00	200	346	Peak
3	* 15900.000	36.09	6.55	42.64	-11.36	54.00	200	346	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_Band2_TX_CH 64 ANT 0+1	Test Voltage	By Notebook PC

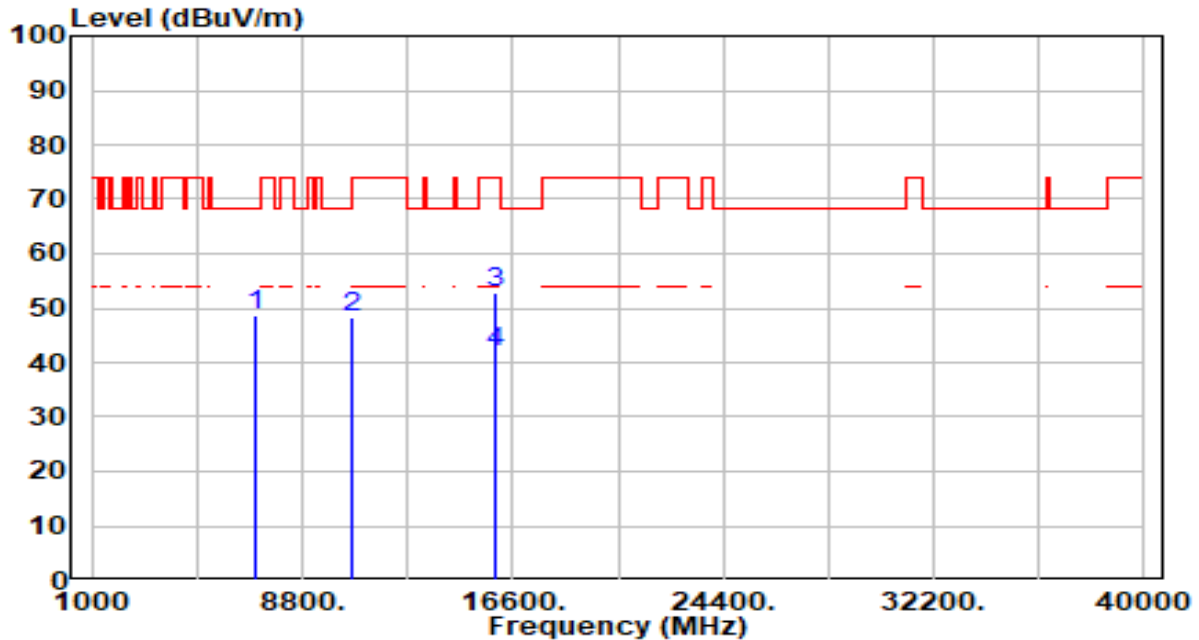


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	7093.000	43.29	5.46	48.75	-19.45	68.20	200	304	Peak
2		10640.000	43.61	4.62	48.23	-25.77	74.00	200	30	Peak
3		15960.000	46.35	6.55	52.90	-21.10	74.00	200	79	Peak
4	*	15960.000	35.30	6.55	41.85	-12.15	54.00	200	79	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_Band2_TX_CH 64 ANT 0+1	Test Voltage	By Notebook PC

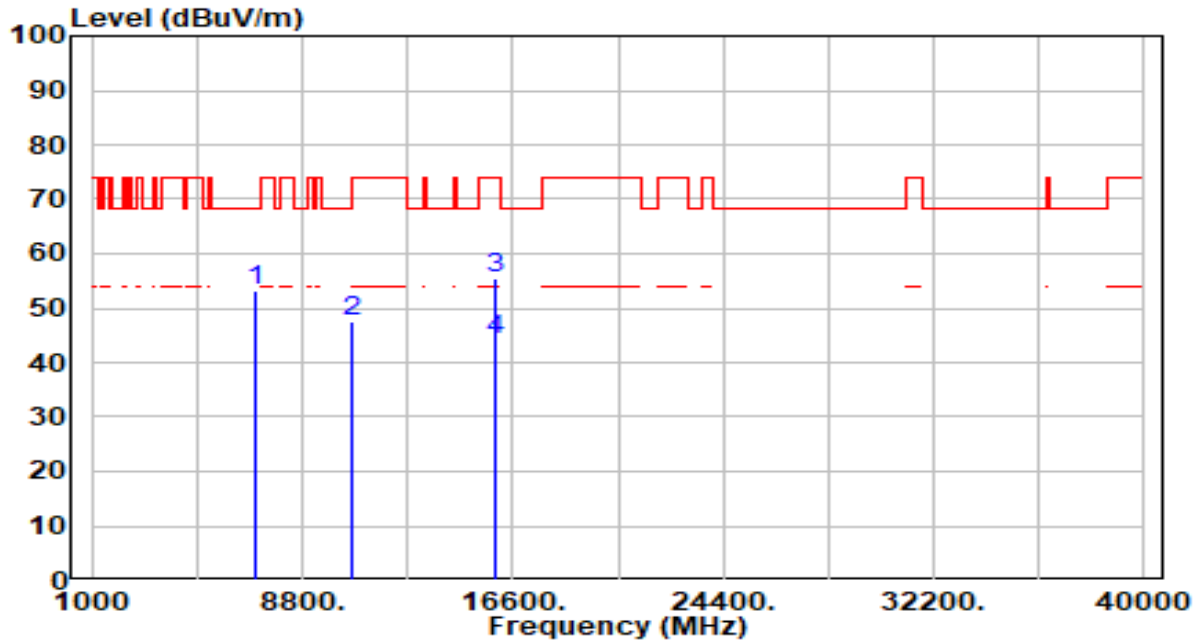


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	7093.000	47.82	5.46	53.28	-14.92	68.20	200	250	Peak
2		10640.000	42.83	4.62	47.45	-26.55	74.00	200	12	Peak
3		15960.000	48.85	6.55	55.40	-18.60	74.00	200	0	Peak
4	*	15960.000	37.65	6.55	44.20	-9.80	54.00	200	0	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_Band3_TX_CH 100 ANT 0+1	Test Voltage	By Notebook PC

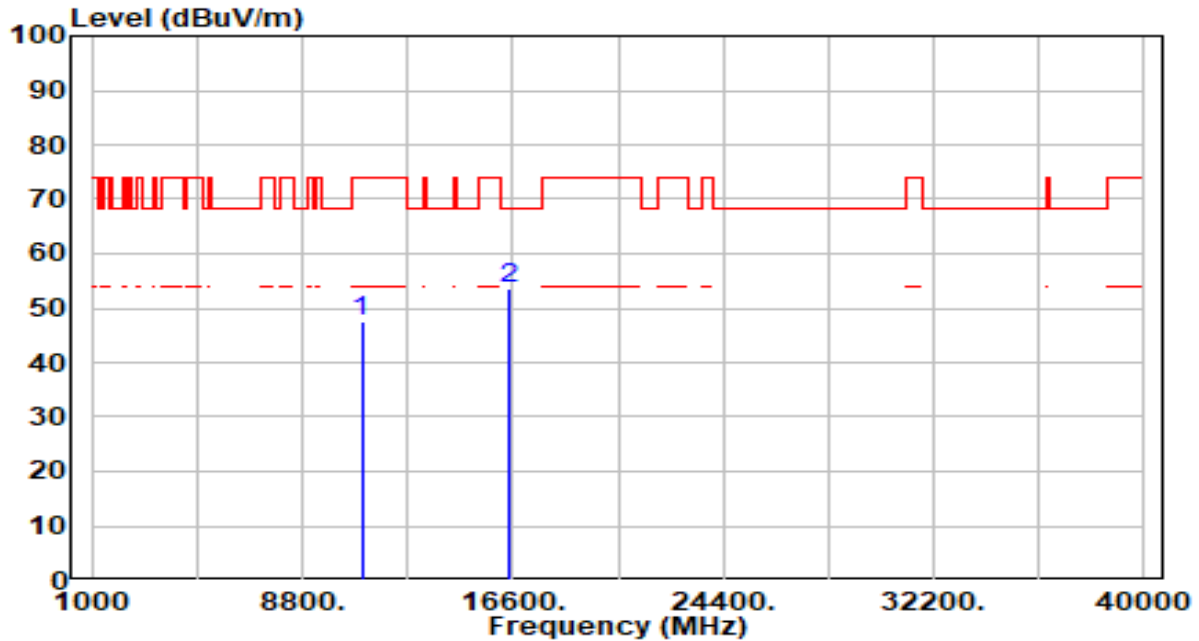


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11000.000	43.02	4.52	47.54	-26.46	74.00	100	19	Peak
2	*	16500.000	47.65	6.10	53.75	-14.45	68.20	100	68	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_Band3_TX_CH 100 ANT 0+1	Test Voltage	By Notebook PC

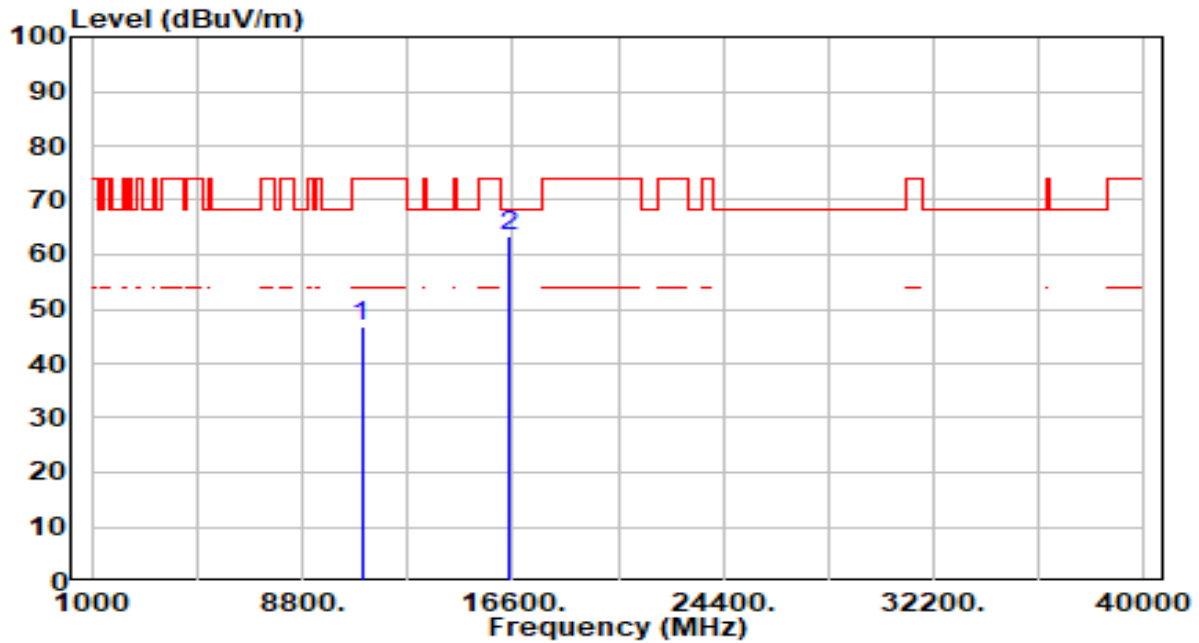


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11000.000	42.44	4.52	46.96	-27.04	74.00	100	95	Peak
2	*	16500.000	57.48	6.10	63.58	-4.62	68.20	100	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_Band3_TX_CH 116 ANT 0+1	Test Voltage	By Notebook PC

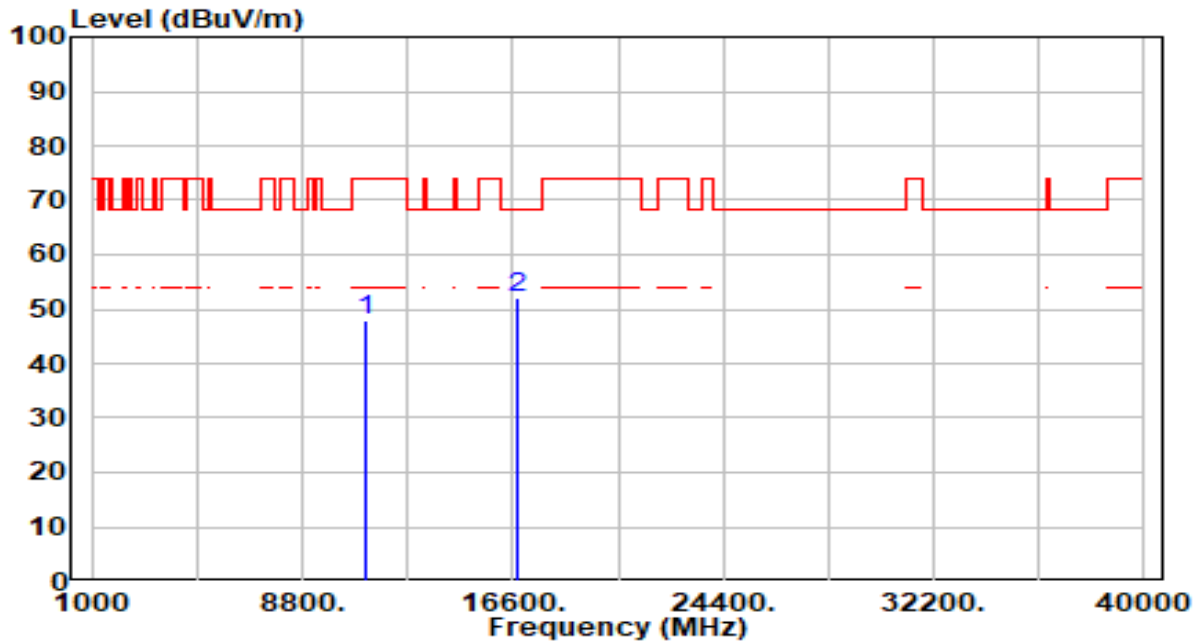


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11160.000	43.08	4.94	48.01	-25.99	74.00	100	15	Peak
2	* 16740.000	45.93	6.19	52.12	-16.08	68.20	100	70	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_Band3_TX_CH 116 ANT 0+1	Test Voltage	By Notebook PC

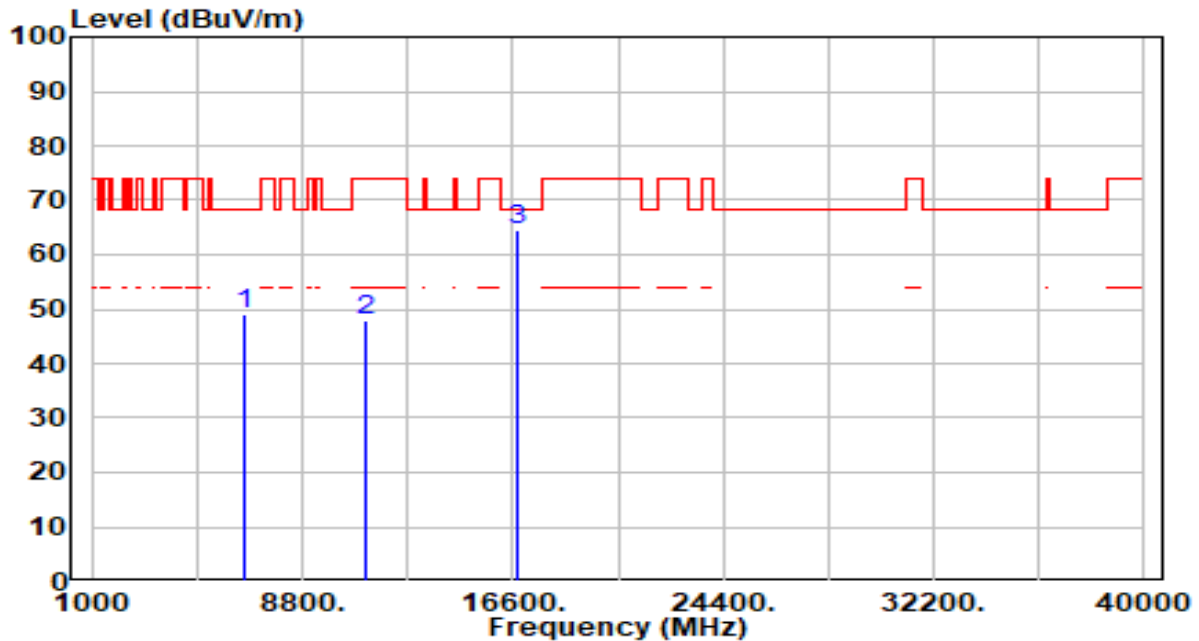


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	6688.000	43.88	5.14	49.01	-19.19	68.20	100	0	Peak
2	11160.000	42.80	4.94	47.74	-26.26	74.00	100	38	Peak
3	* 16740.000	58.45	6.19	64.64	-3.56	68.20	100	337	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_Band3_TX_CH 140 ANT 0+1	Test Voltage	By Notebook PC

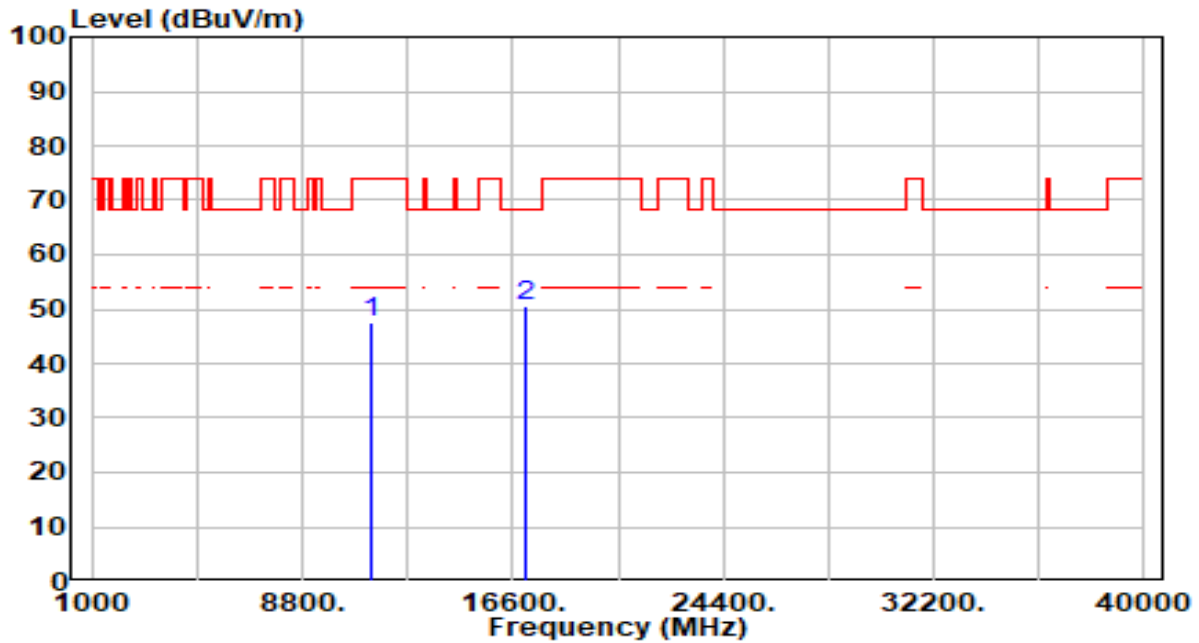


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11400.000	42.21	5.26	47.47	-26.53	74.00	100	44	Peak
2	*	17100.000	44.48	5.97	50.45	-17.75	68.20	100	346	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_Band3_TX_CH 140 ANT 0+1	Test Voltage	By Notebook PC

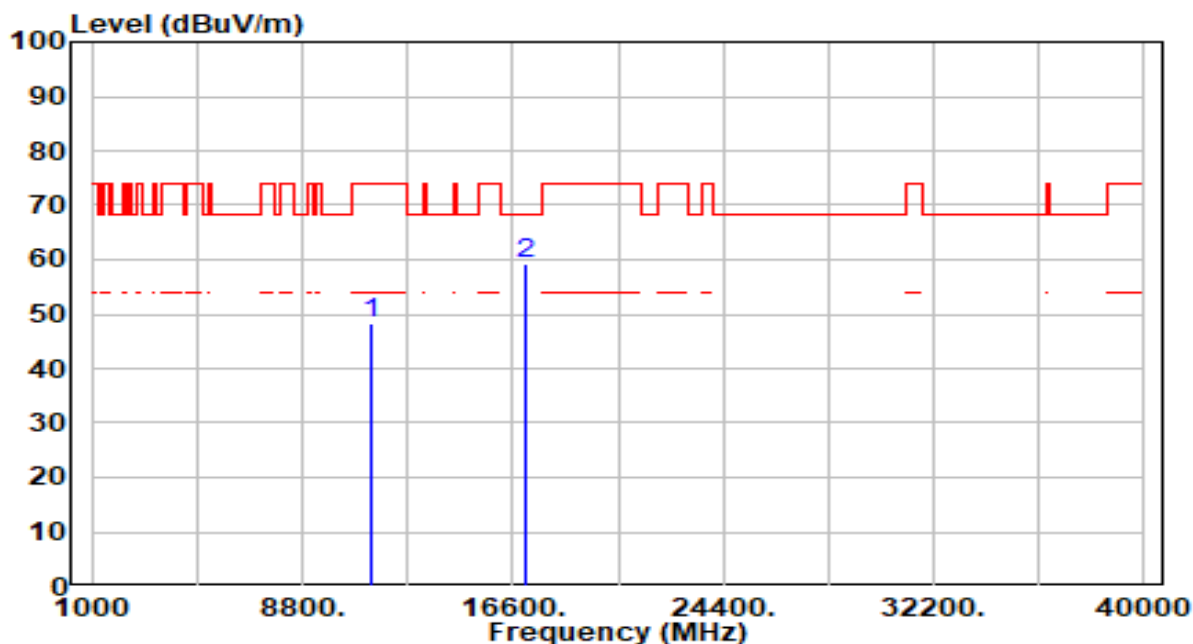


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11400.000	42.97	5.26	48.24	-25.76	74.00	100	360	Peak
2	* 17100.000	53.45	5.97	59.42	-8.78	68.20	100	348	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_Band3_TX_CH 144 ANT 0+1	Test Voltage	By Notebook PC

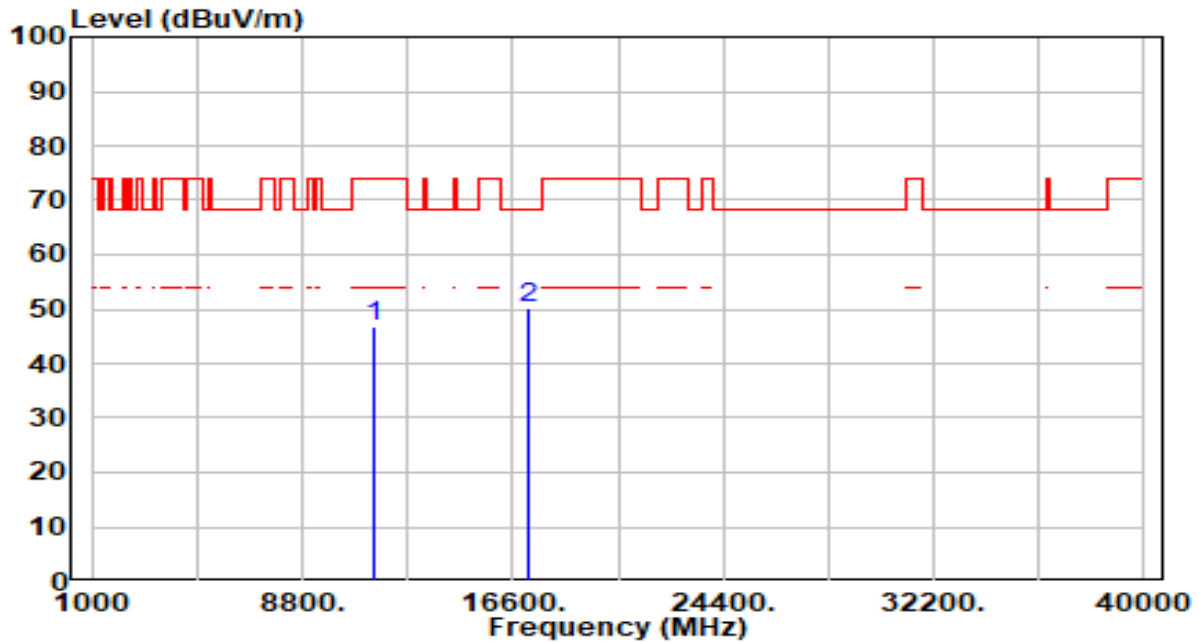


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11440.000	41.50	5.29	46.79	-27.21	74.00	100	227	Peak
2	* 17160.000	44.35	5.87	50.22	-17.98	68.20	100	6	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_Band3_TX_CH 144 ANT 0+1	Test Voltage	By Notebook PC

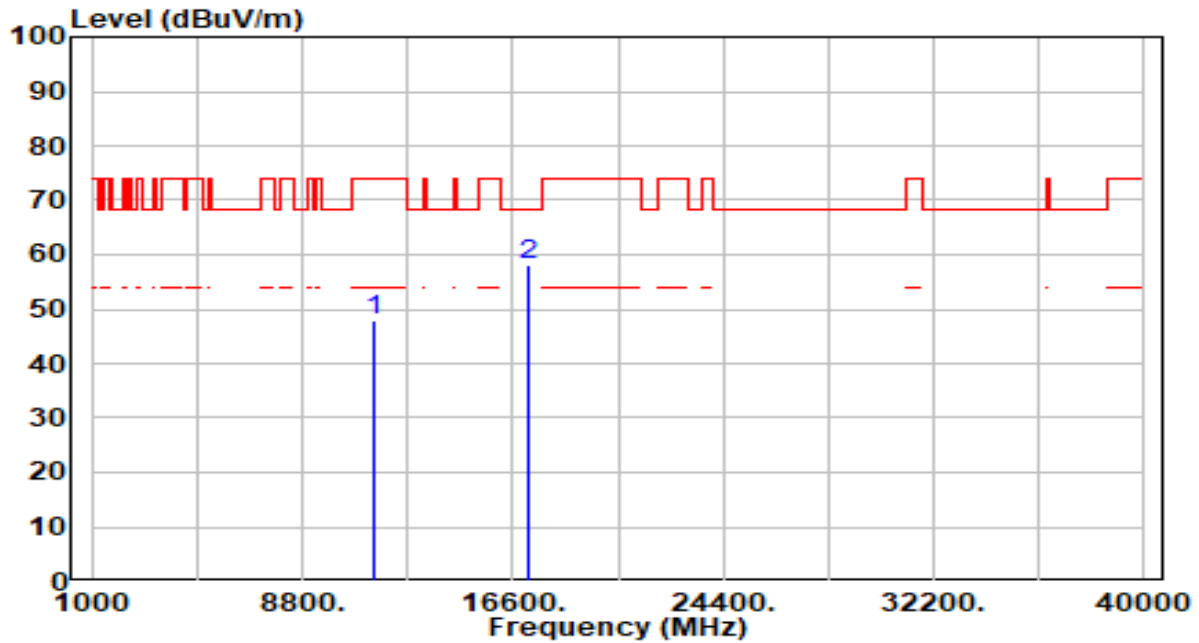


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11440.000	42.56	5.29	47.85	-26.15	74.00	100	50	Peak
2	*	17160.000	52.33	5.87	58.20	-10.00	68.20	100	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_Band4_TX_CH 149 ANT 0+1	Test Voltage	By Notebook PC

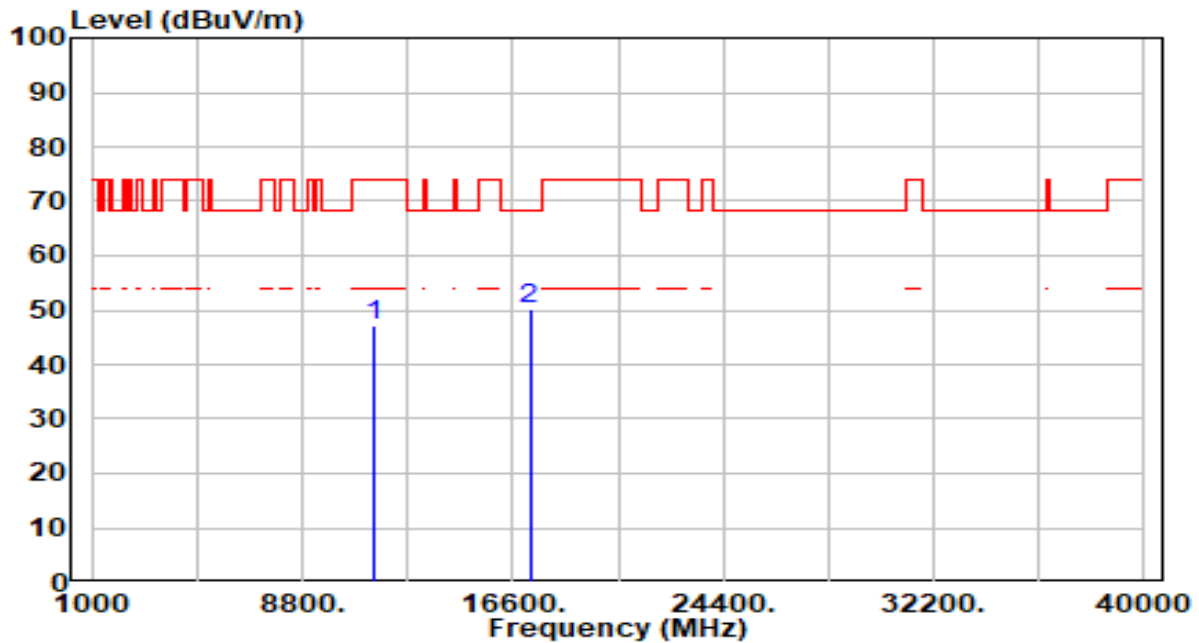


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11490.000	41.67	5.32	46.99	-27.01	74.00	100	360	Peak
2	*	17235.000	44.44	5.71	50.15	-18.05	68.20	100	304	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_Band4_TX_CH 149 ANT 0+1	Test Voltage	By Notebook PC

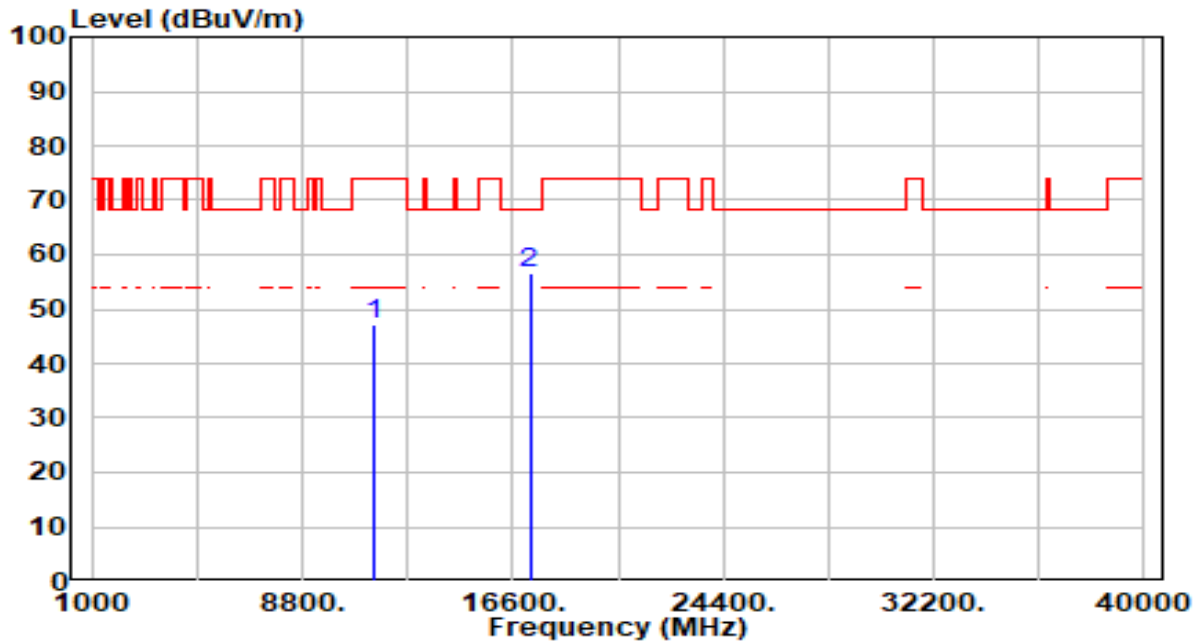


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11490.000	41.72	5.32	47.04	-26.96	74.00	100	47	Peak
2	*	17235.000	51.03	5.71	56.74	-11.46	68.20	100	342	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_Band4_TX_CH 157 ANT 0+1	Test Voltage	By Notebook PC

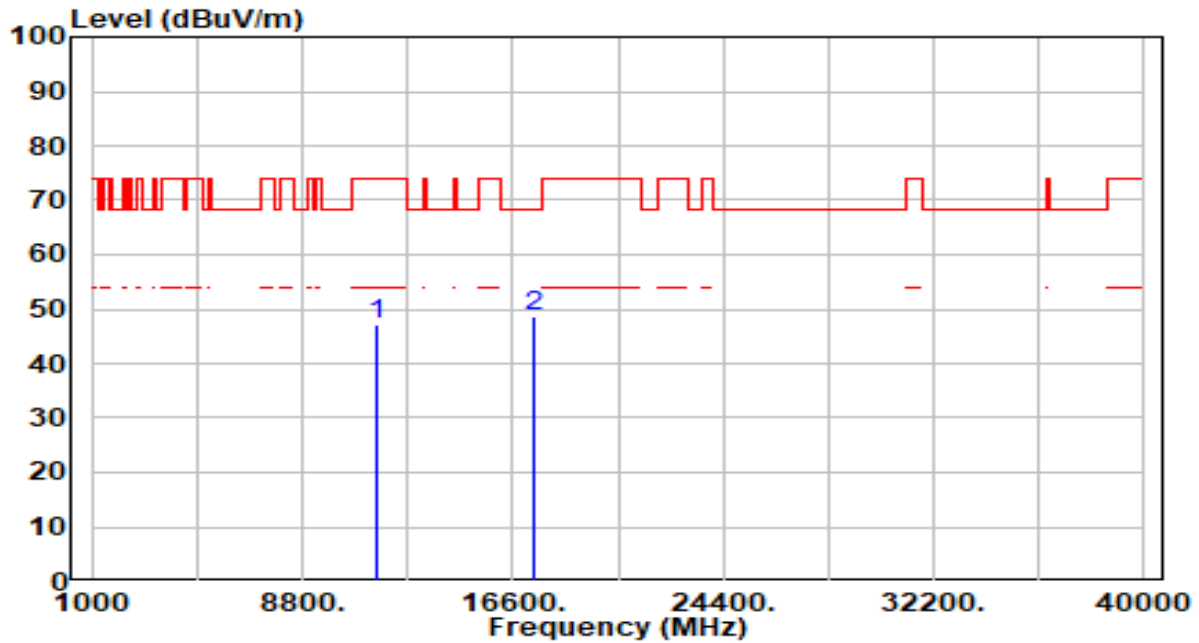


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11570.000	41.90	5.38	47.28	-26.72	74.00	100	151	Peak
2	* 17355.000	43.36	5.39	48.75	-19.45	68.20	100	292	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_Band4_TX_CH 157 ANT 0+1	Test Voltage	By Notebook PC

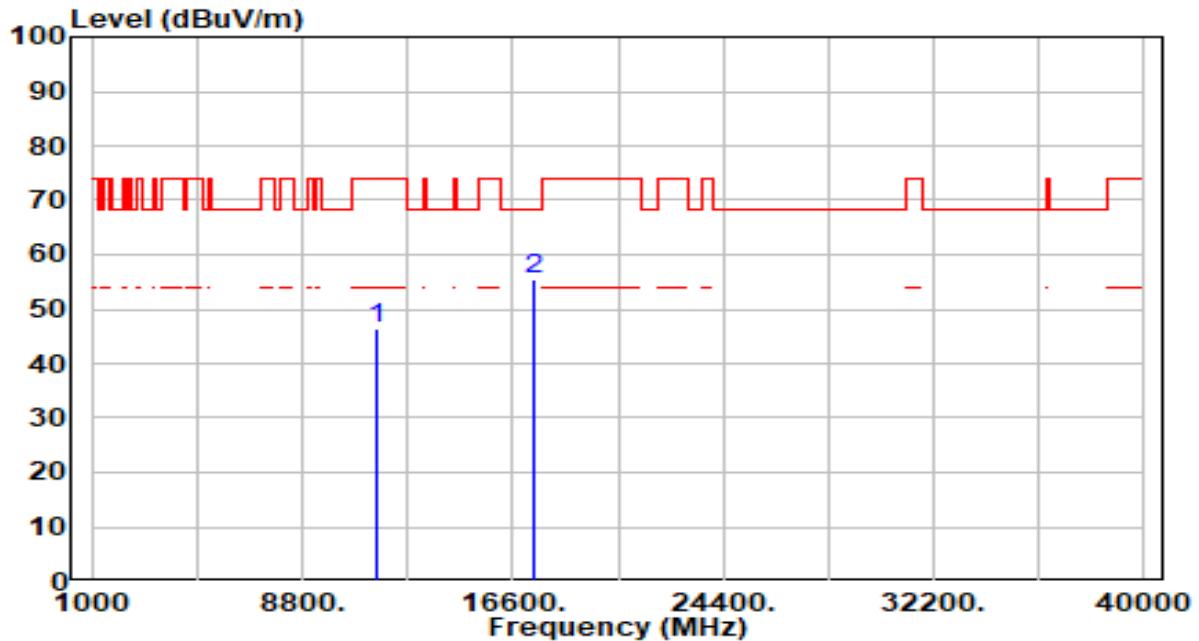


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11570.000	41.14	5.38	46.52	-27.48	74.00	100	353	Peak
2	*	17355.000	50.17	5.39	55.56	-12.64	68.20	100	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_Band4_TX_CH 165 ANT 0+1	Test Voltage	By Notebook PC

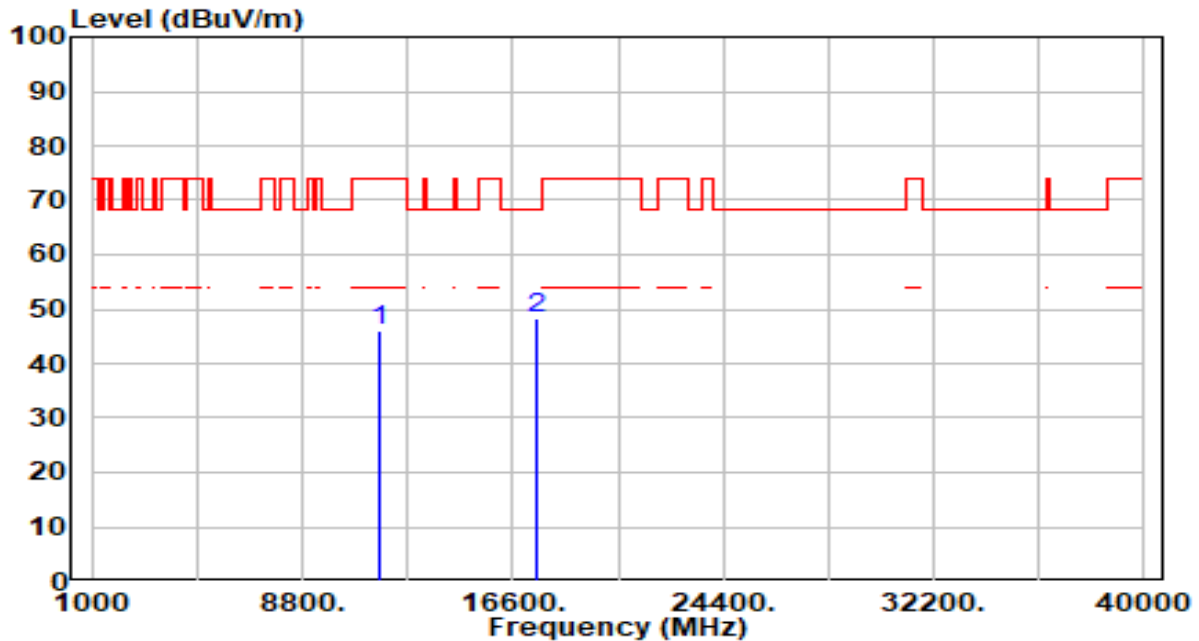


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11650.000	40.69	5.36	46.05	-27.95	74.00	100	92	Peak
2	*	17475.000	43.02	5.29	48.31	-19.89	68.20	100	289	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_Band4_TX_CH 165 ANT 0+1	Test Voltage	By Notebook PC

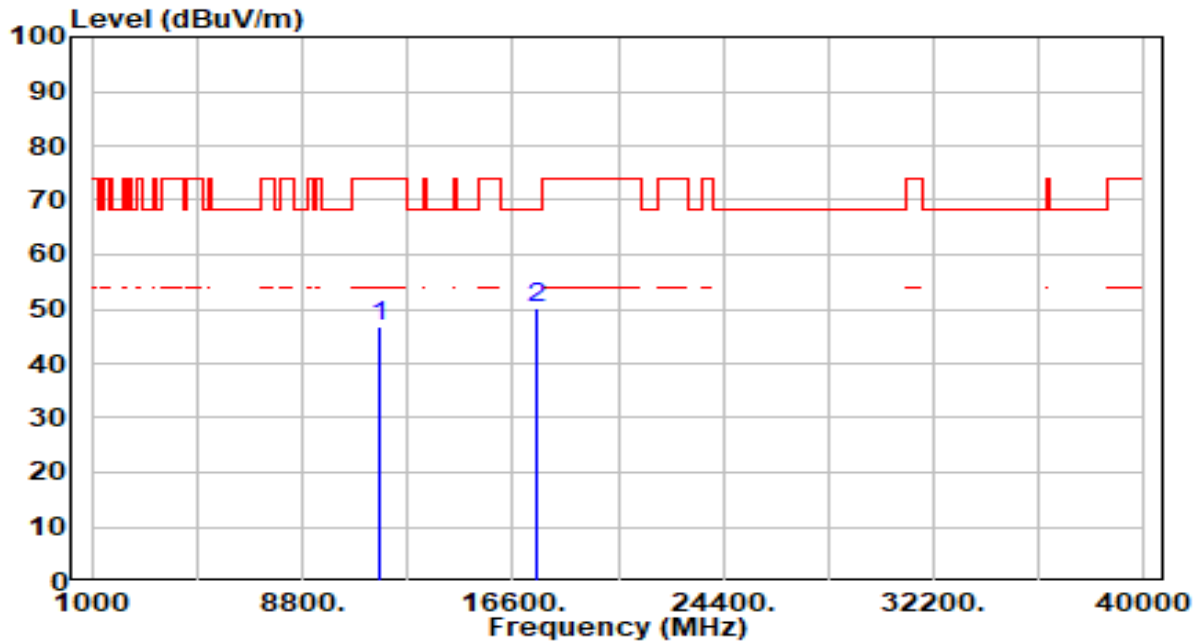


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11650.000	41.37	5.36	46.74	-27.26	74.00	100	90	Peak
2	* 17475.000	44.71	5.29	50.00	-18.20	68.20	100	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_Band1_TX_CH 38 ANT 0+1	Test Voltage	By Notebook PC

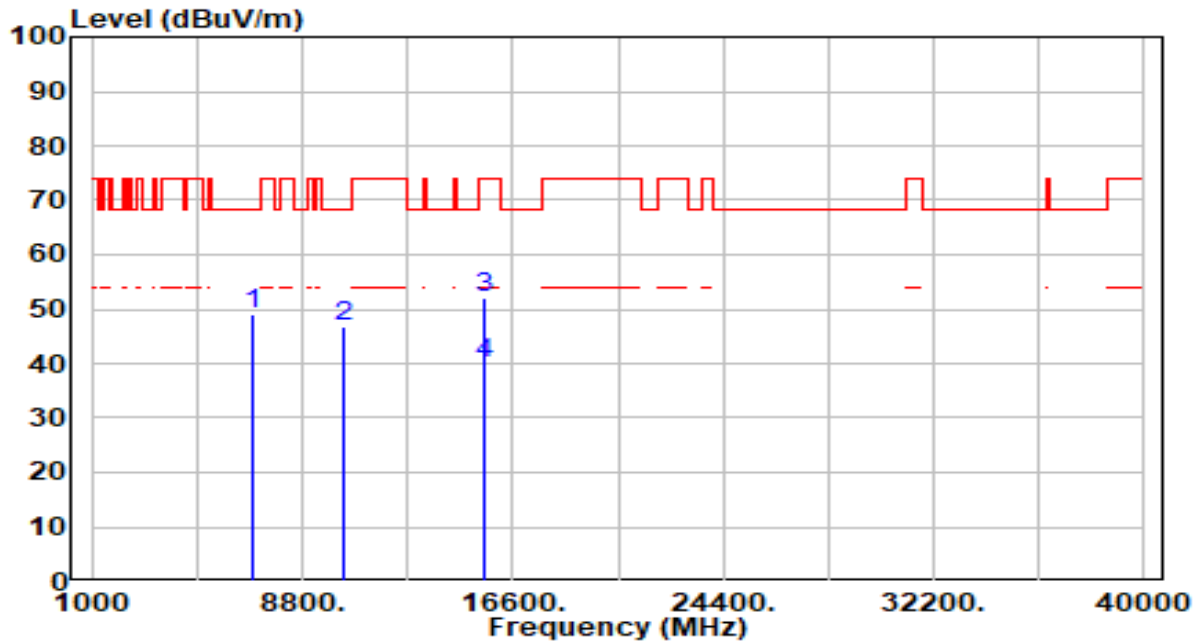


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	6920.000	43.65	5.39	49.04	-19.16	68.20	200	252	Peak
2		10380.000	41.93	4.84	46.78	-21.42	68.20	200	186	Peak
3		15570.000	45.96	6.18	52.14	-21.86	74.00	200	80	Peak
4	*	15570.000	33.96	6.18	40.14	-13.86	54.00	200	80	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_Band1_TX_CH 38 ANT 0+1	Test Voltage	By Notebook PC

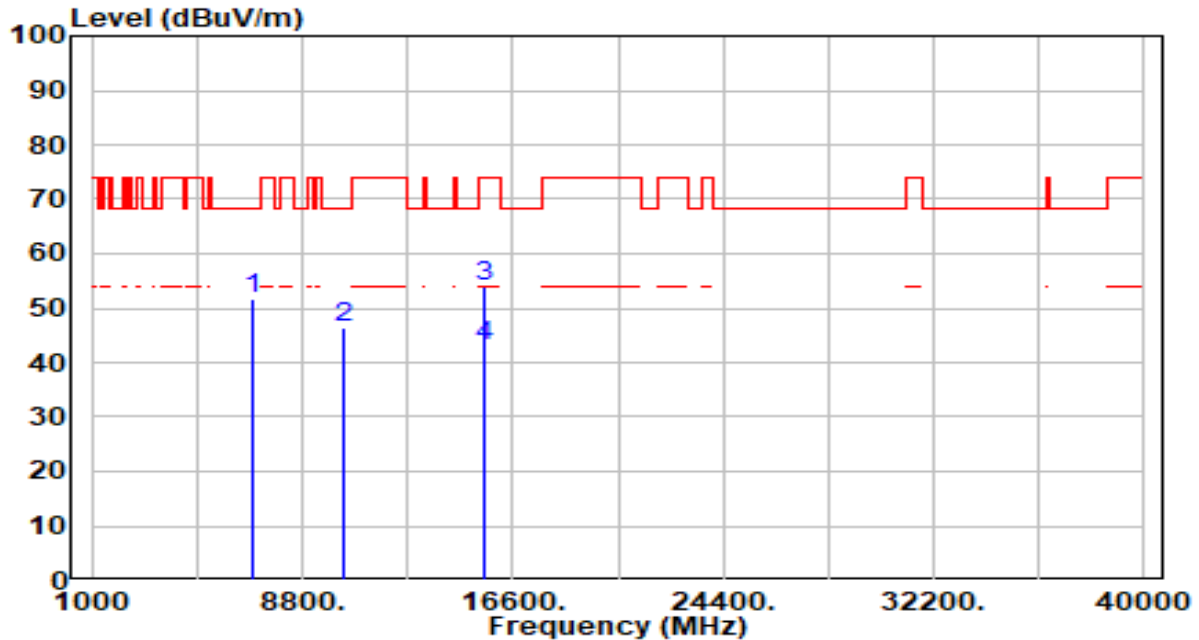


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	6920.000	46.37	5.39	51.76	-16.44	68.20	200	253	Peak
2		10380.000	41.69	4.84	46.53	-21.67	68.20	200	30	Peak
3		15570.000	47.83	6.18	54.00	-20.00	74.00	200	1	Peak
4	*	15570.000	36.78	6.18	42.96	-11.04	54.00	200	1	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_Band1_TX_CH 46 ANT 0+1	Test Voltage	By Notebook PC

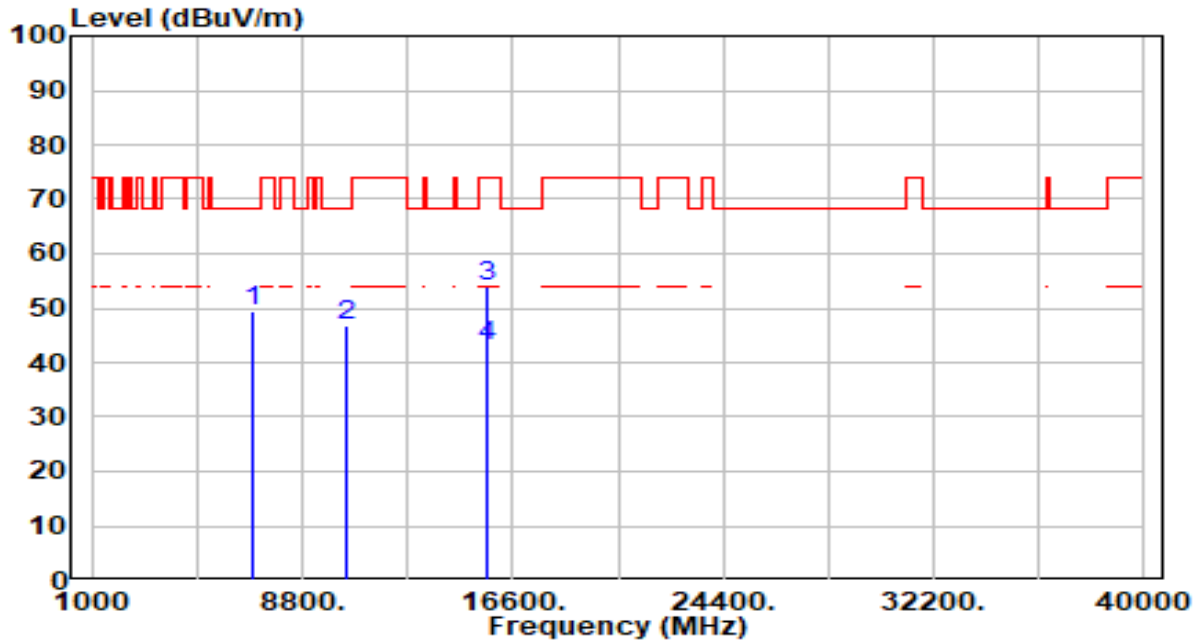


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	6973.000	44.15	5.40	49.55	-18.65	68.20	200	305	Peak
2		10460.000	41.98	4.74	46.72	-21.48	68.20	200	314	Peak
3		15690.000	47.58	6.33	53.90	-20.10	74.00	200	93	Peak
4	*	15690.000	36.57	6.33	42.90	-11.10	54.00	200	93	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_Band1_TX_CH 46 ANT 0+1	Test Voltage	By Notebook PC

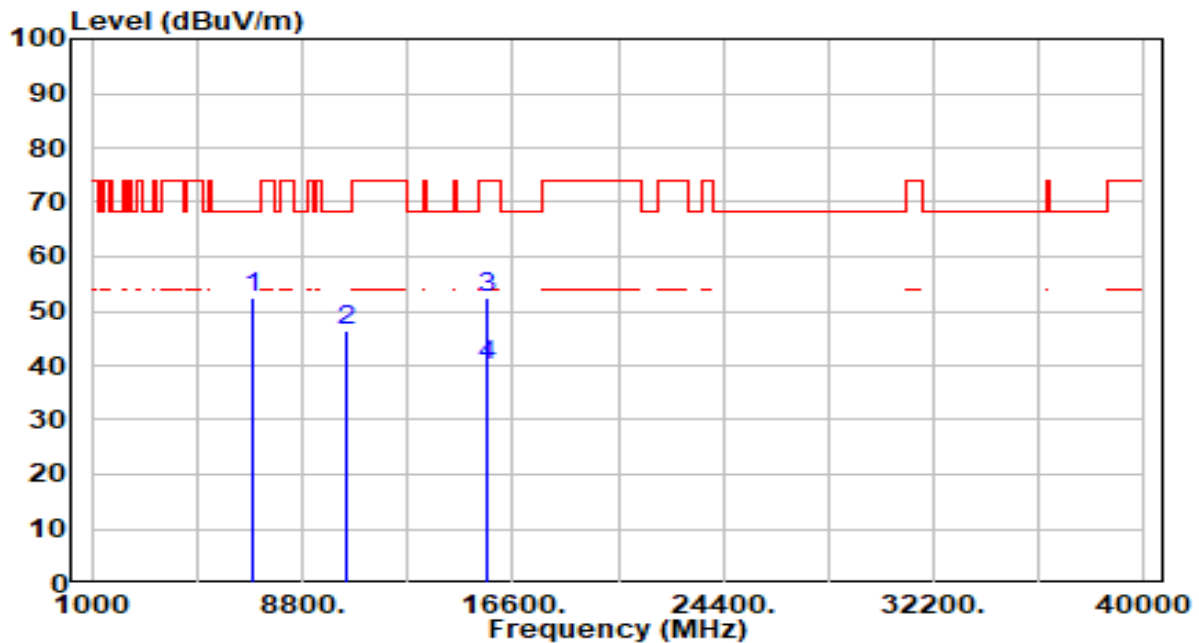


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	6973.000	47.01	5.40	52.41	-15.79	68.20	200	265	Peak
2		10460.000	41.84	4.74	46.58	-21.62	68.20	200	70	Peak
3		15690.000	46.19	6.33	52.52	-21.48	74.00	200	0	Peak
4	*	15690.000	33.70	6.33	40.03	-13.97	54.00	200	0	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_Band2_TX_CH 54 ANT 0+1	Test Voltage	By Notebook PC

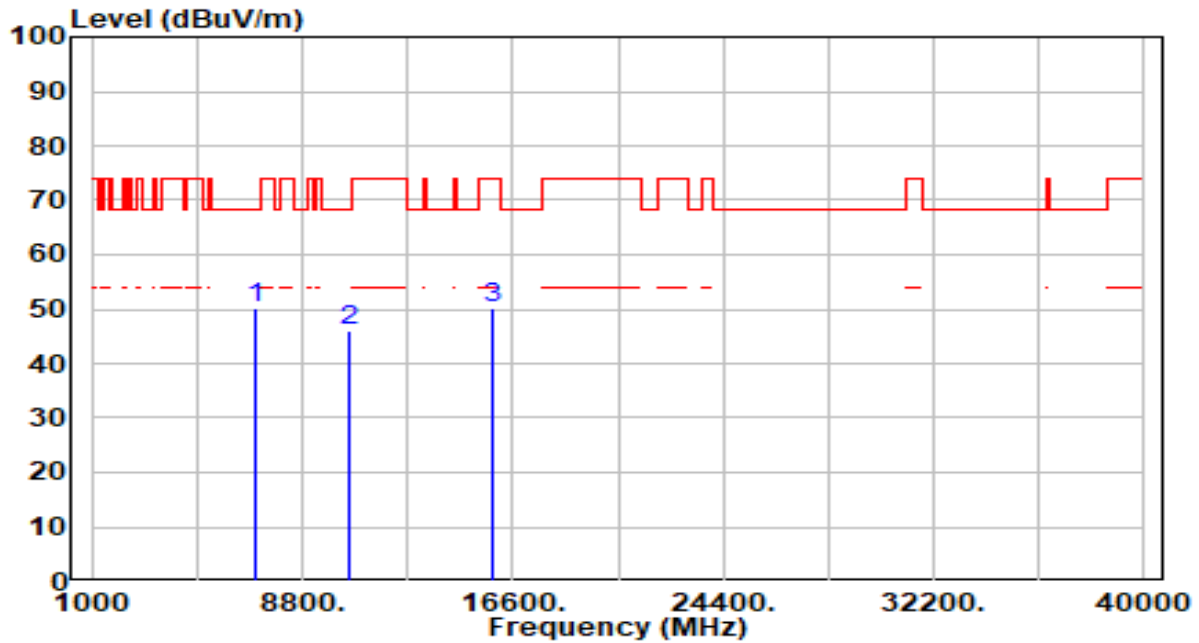


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	7026.000	44.64	5.42	50.05	-18.15	68.20	200	306	Peak
2		10540.000	41.19	4.66	45.85	-22.35	68.20	200	183	Peak
3		15810.000	43.74	6.55	50.29	-23.71	74.00	200	98	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_Band2_TX_CH 54 ANT 0+1	Test Voltage	By Notebook PC

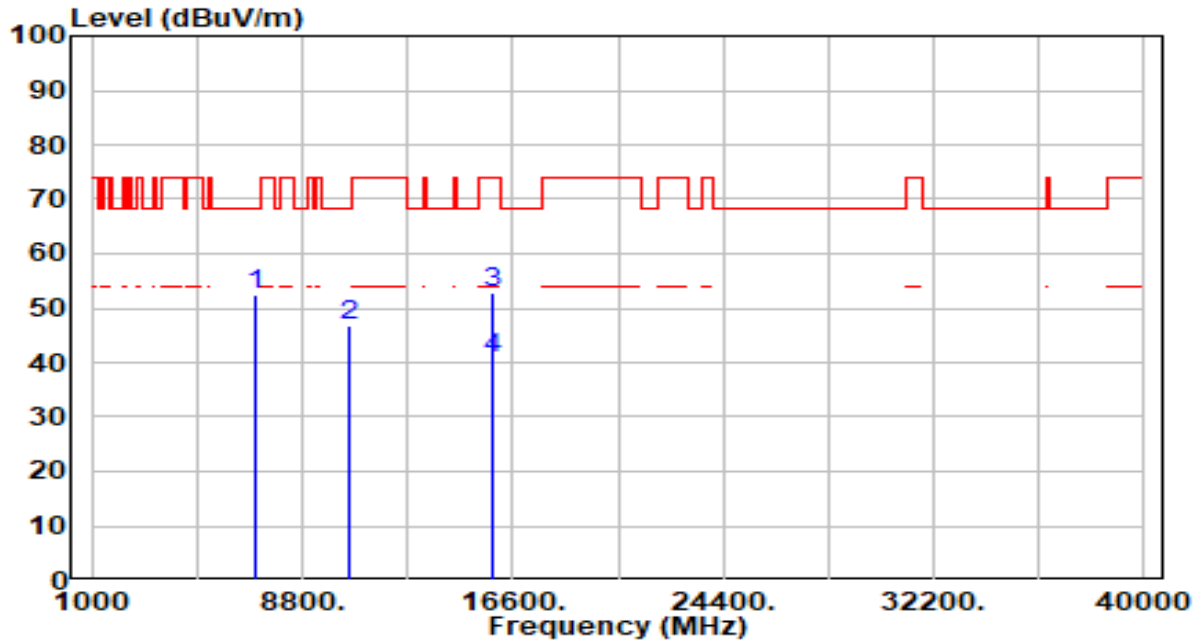


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	7027.000	46.90	5.42	52.31	-15.89	68.20	200	250	Peak
2		10540.000	42.16	4.66	46.82	-21.38	68.20	200	0	Peak
3		15810.000	46.31	6.55	52.86	-21.14	74.00	200	0	Peak
4	*	15810.000	34.29	6.55	40.84	-13.16	54.00	200	0	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_Band2_TX_CH 62 ANT 0+1	Test Voltage	By Notebook PC

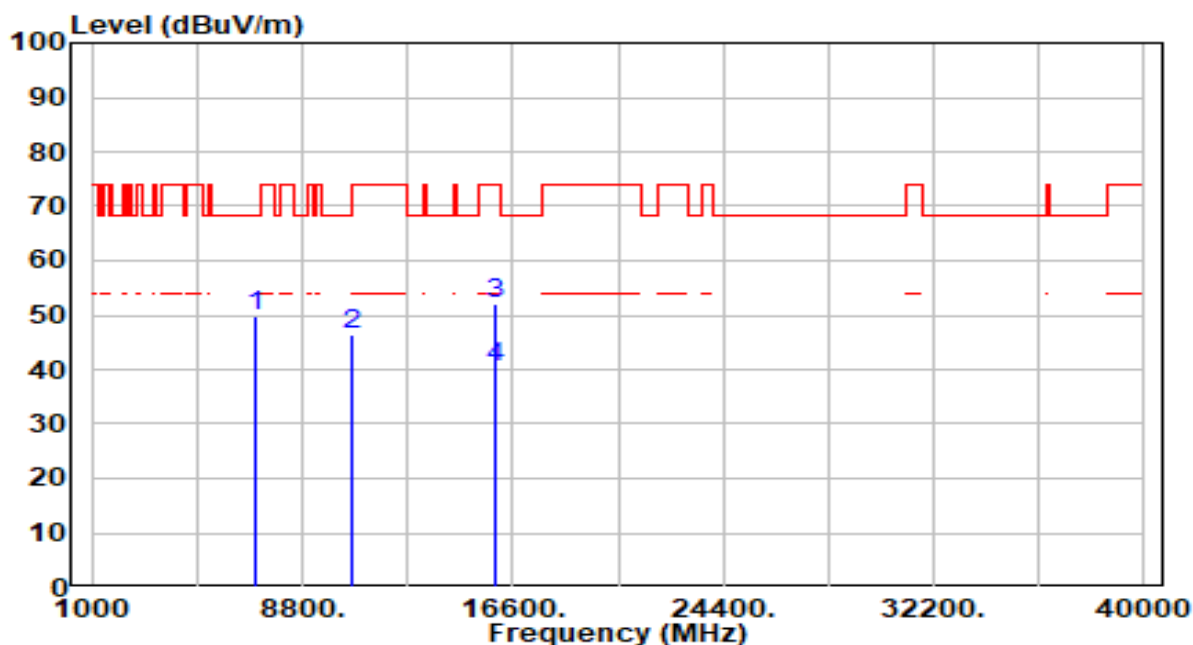


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	7080.000	44.22	5.45	49.67	-18.53	68.20	200	298	Peak
2		10620.000	41.66	4.62	46.28	-27.72	74.00	200	358	Peak
3		15930.000	45.67	6.55	52.22	-21.78	74.00	200	84	Peak
4	*	15930.000	33.67	6.55	40.22	-13.78	54.00	200	84	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_Band2_TX_CH 62 ANT 0+1	Test Voltage	By Notebook PC

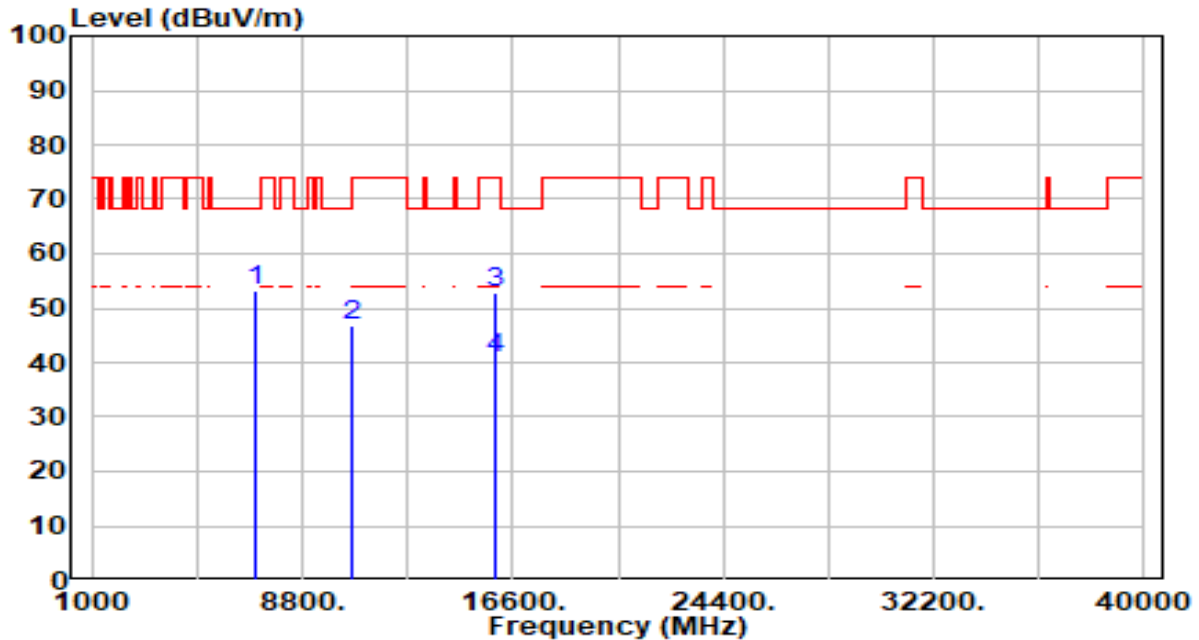


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	7080.000	47.85	5.45	53.30	-14.90	68.20	200	253	Peak
2		10620.000	42.14	4.62	46.76	-27.24	74.00	200	325	Peak
3		15930.000	46.24	6.55	52.79	-21.21	74.00	200	0	Peak
4	*	15930.000	34.34	6.55	40.89	-13.11	54.00	200	0	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_Band3_TX_CH 102 ANT 0+1	Test Voltage	By Notebook PC

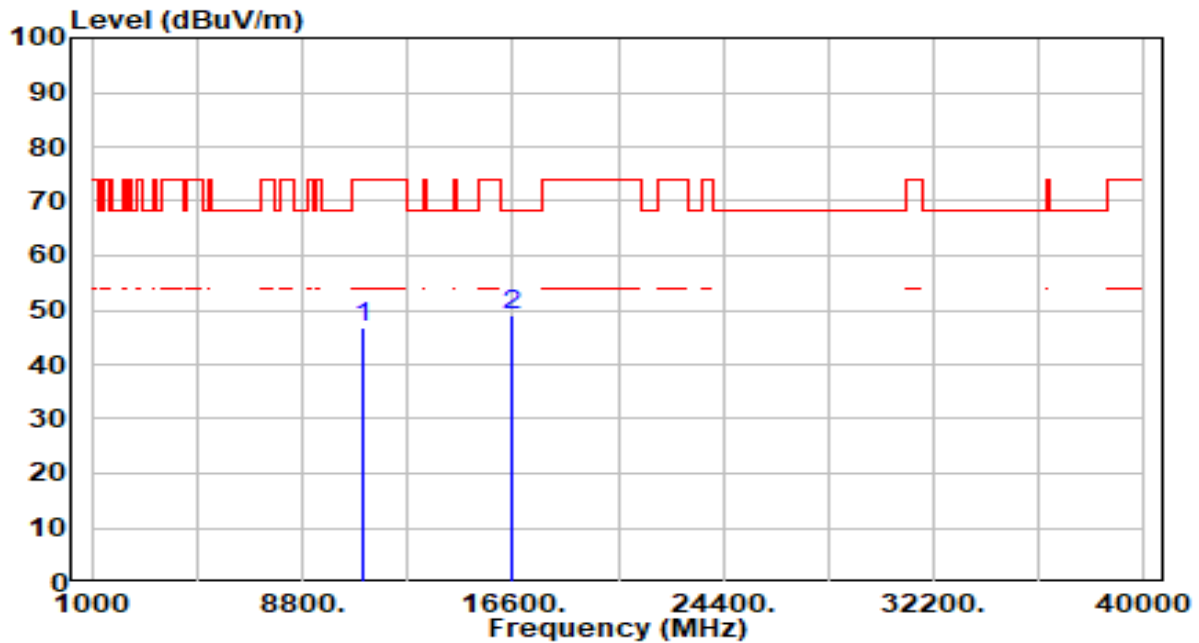


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11020.000	42.25	4.57	46.82	-27.18	74.00	100	7	Peak
2	*	16530.000	42.97	6.10	49.07	-19.13	68.20	100	290	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_Band3_TX_CH 102 ANT 0+1	Test Voltage	By Notebook PC

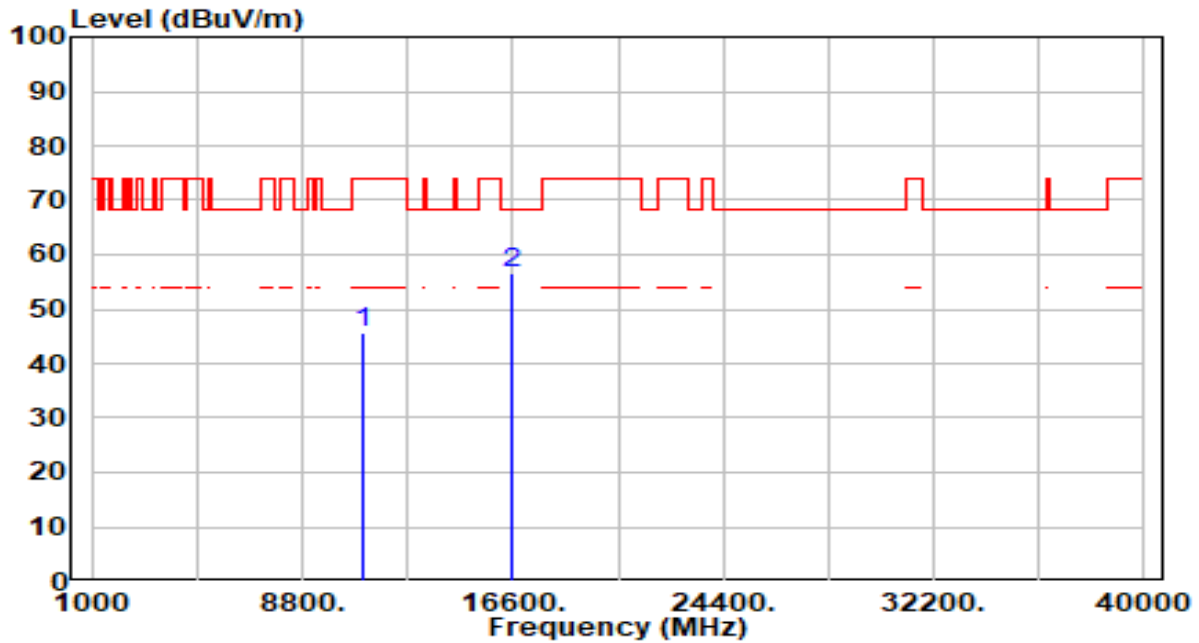


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11020.000	41.27	4.57	45.85	-28.15	74.00	100	210	Peak
2	* 16530.000	50.41	6.10	56.51	-11.69	68.20	100	353	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_Band3_TX_CH 110 ANT 0+1	Test Voltage	By Notebook PC

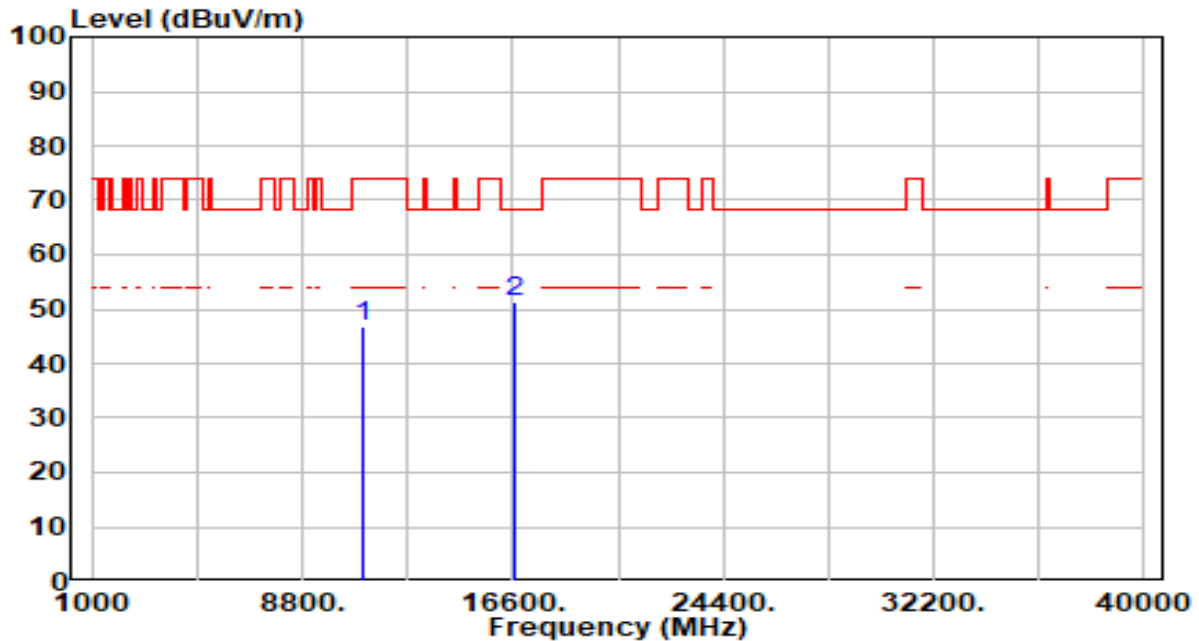


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11100.000	41.82	4.78	46.61	-27.39	74.00	100	0	Peak
2	* 16650.000	45.29	6.14	51.43	-16.77	68.20	100	282	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_Band3_TX_CH 110 ANT 0+1	Test Voltage	By Notebook PC

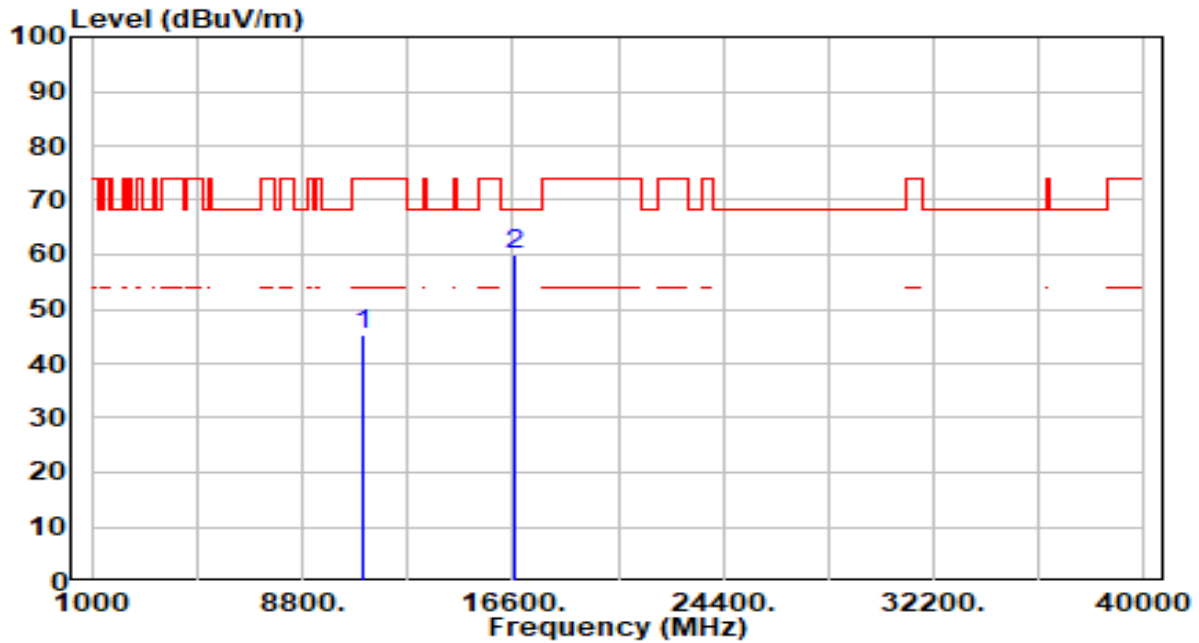


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11100.000	40.63	4.78	45.41	-28.59	74.00	100	347	Peak
2	*	16650.000	53.70	6.14	59.84	-8.36	68.20	100	356	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_Band3_TX_CH 134 ANT 0+1	Test Voltage	By Notebook PC

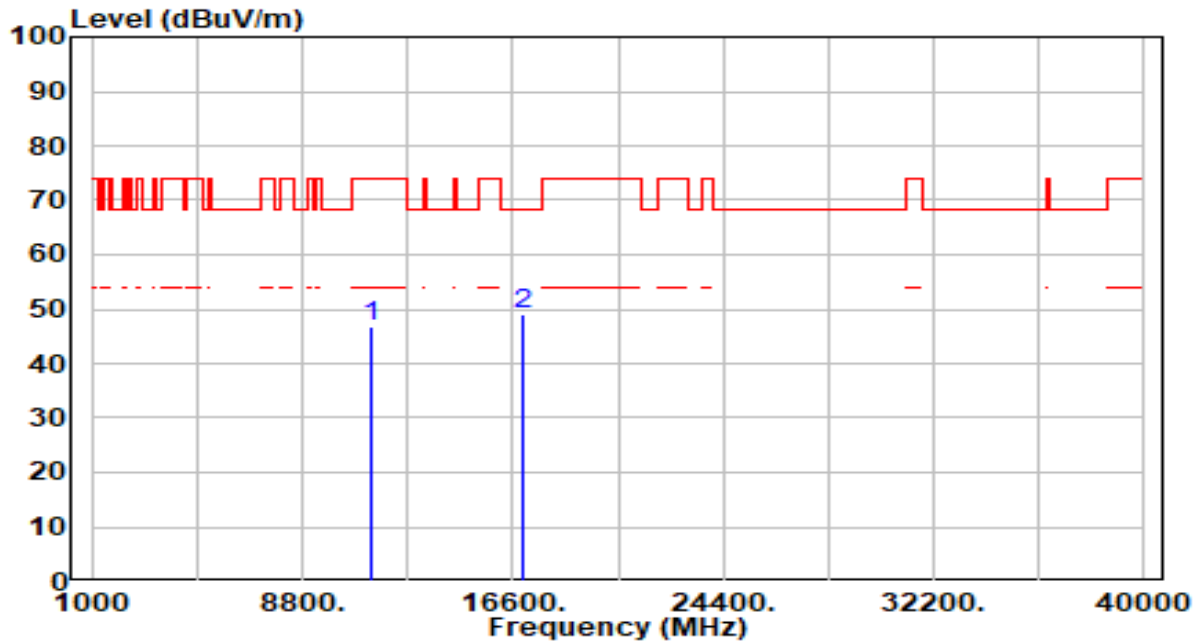


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11340.000	41.43	5.20	46.63	-27.37	74.00	100	139	Peak
2	*	17010.000	43.05	6.12	49.17	-19.03	68.20	100	345	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_Band3_TX_CH 134 ANT 0+1	Test Voltage	By Notebook PC

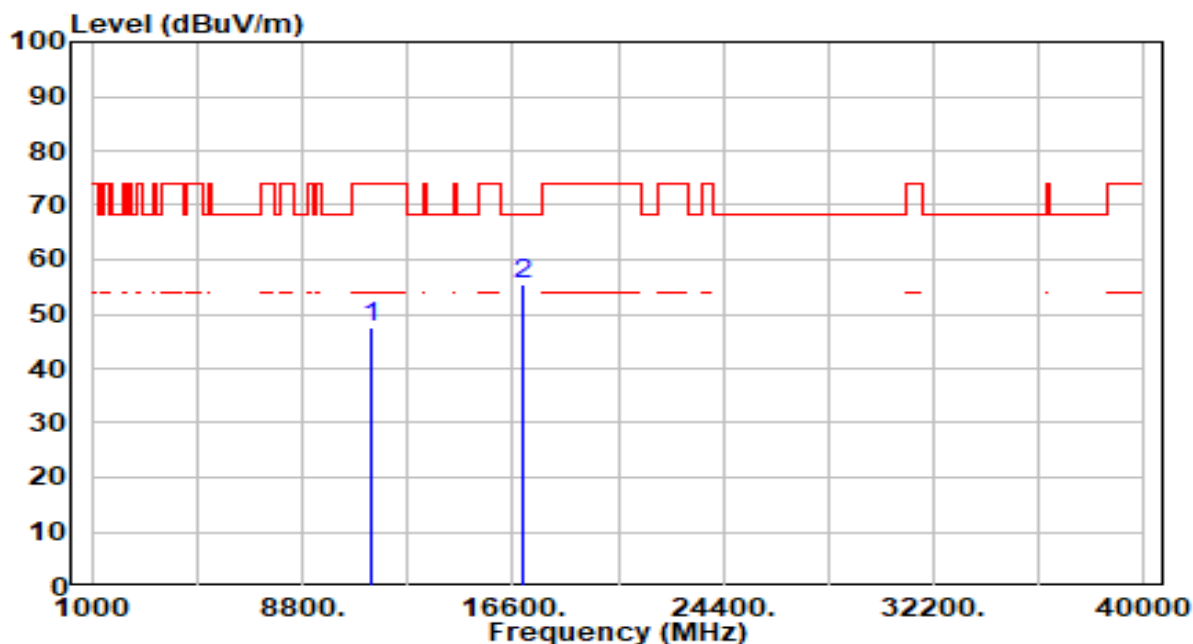


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11340.000	42.18	5.20	47.38	-26.62	74.00	100	360	Peak
2	*	17010.000	49.26	6.12	55.39	-12.81	68.20	100	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_Band3_TX_CH 142 ANT 0+1	Test Voltage	By Notebook PC

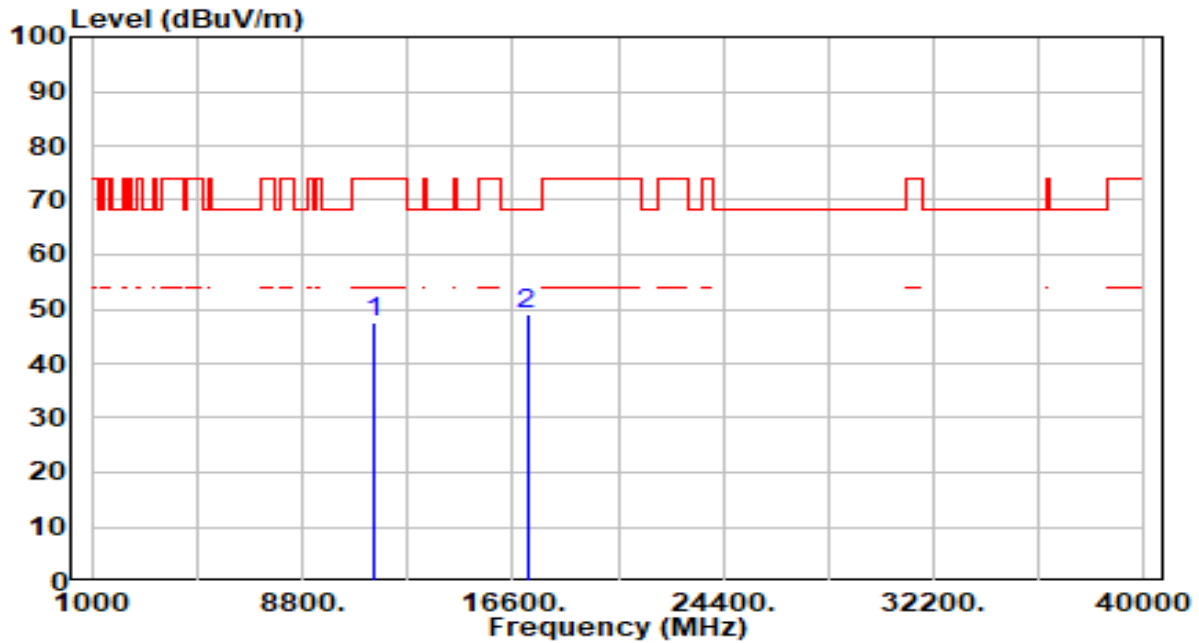


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11420.000	42.09	5.28	47.36	-26.64	74.00	100	0	Peak
2	*	17130.000	43.31	5.92	49.23	-18.97	68.20	100	296	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_Band3_TX_CH 142 ANT 0+1	Test Voltage	By Notebook PC

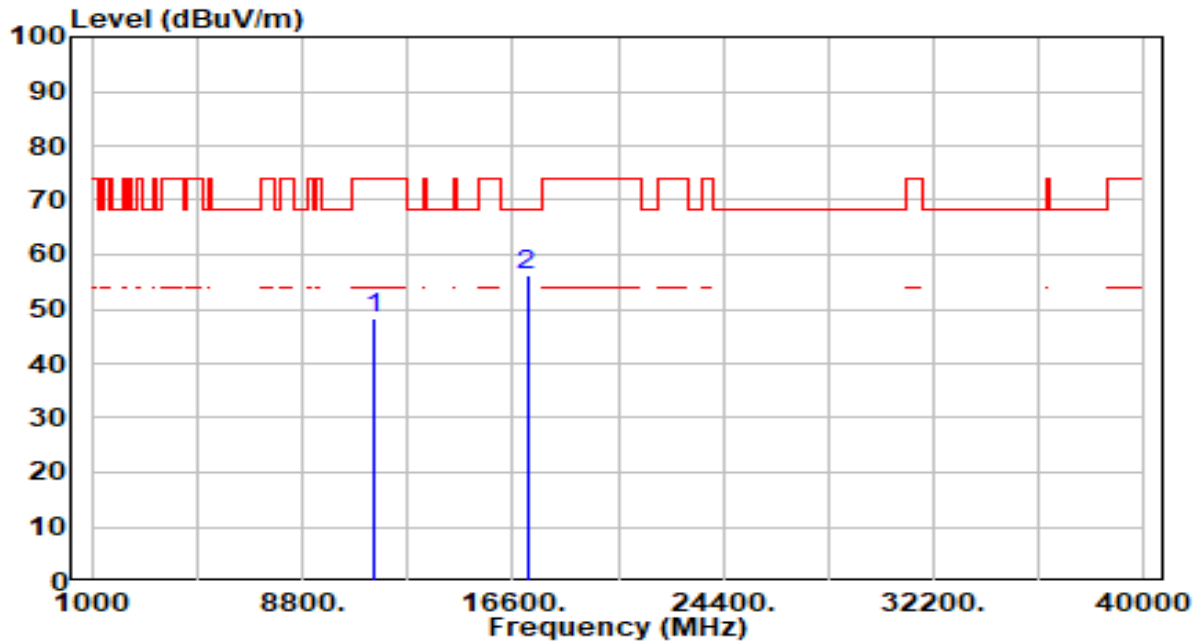


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11420.000	43.00	5.28	48.27	-25.73	74.00	100	16	Peak
2	*	17130.000	50.13	5.92	56.05	-12.15	68.20	100	348	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_Band4_TX_CH 151 ANT 0+1	Test Voltage	By Notebook PC

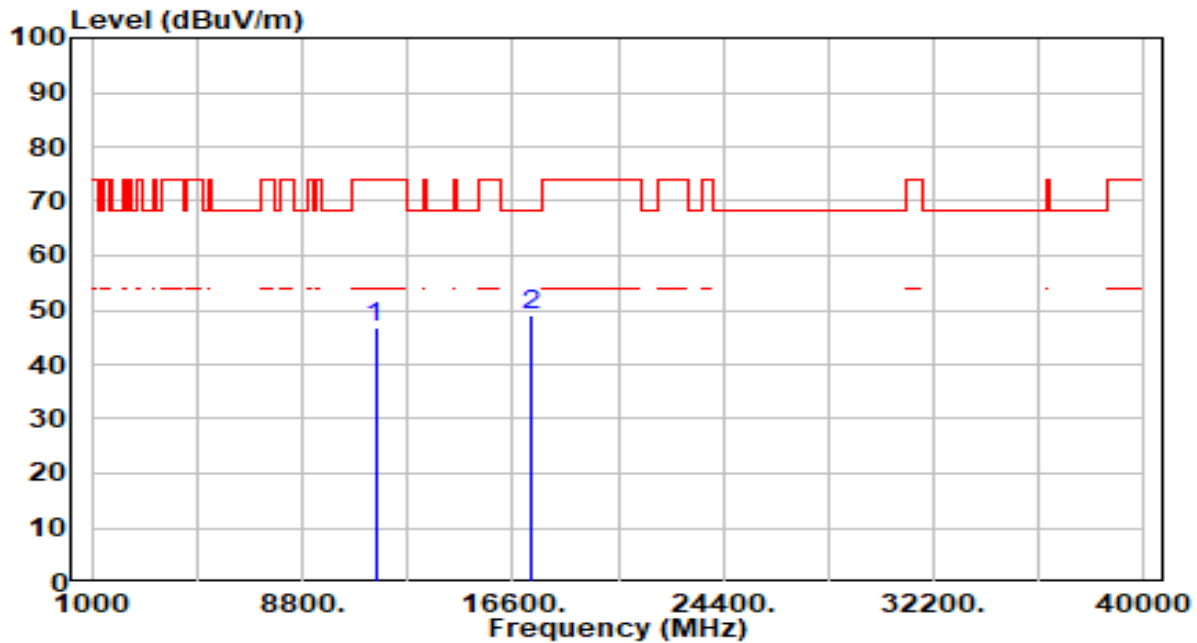


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11510.000	41.48	5.33	46.82	-27.18	74.00	200	0	Peak
2	*	17265.000	43.30	5.63	48.93	-19.27	68.20	200	279	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_Band4_TX_CH 151 ANT 0+1	Test Voltage	By Notebook PC

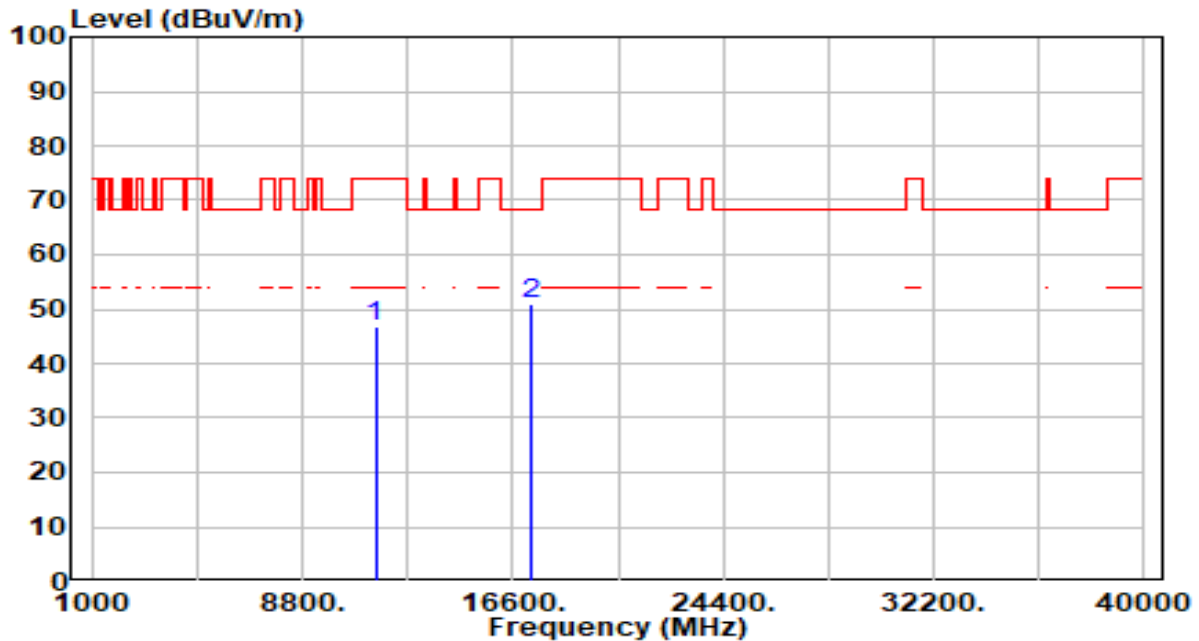


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11510.000	41.49	5.33	46.82	-27.18	74.00	200	35	Peak
2	* 17265.000	45.15	5.63	50.78	-17.42	68.20	200	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_Band4_TX_CH 159 ANT 0+1	Test Voltage	By Notebook PC

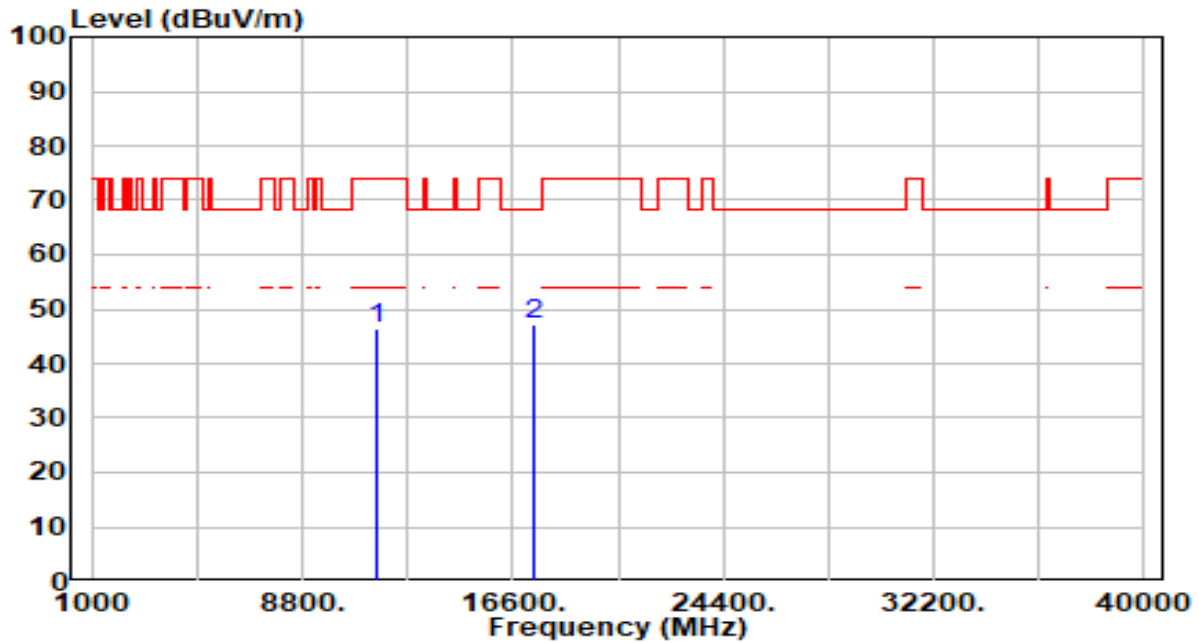


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11590.000	41.05	5.39	46.44	-27.56	74.00	200	190	Peak
2	*	17385.000	41.78	5.31	47.09	-21.11	68.20	200	296	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_Band4_TX_CH 159 ANT 0+1	Test Voltage	By Notebook PC

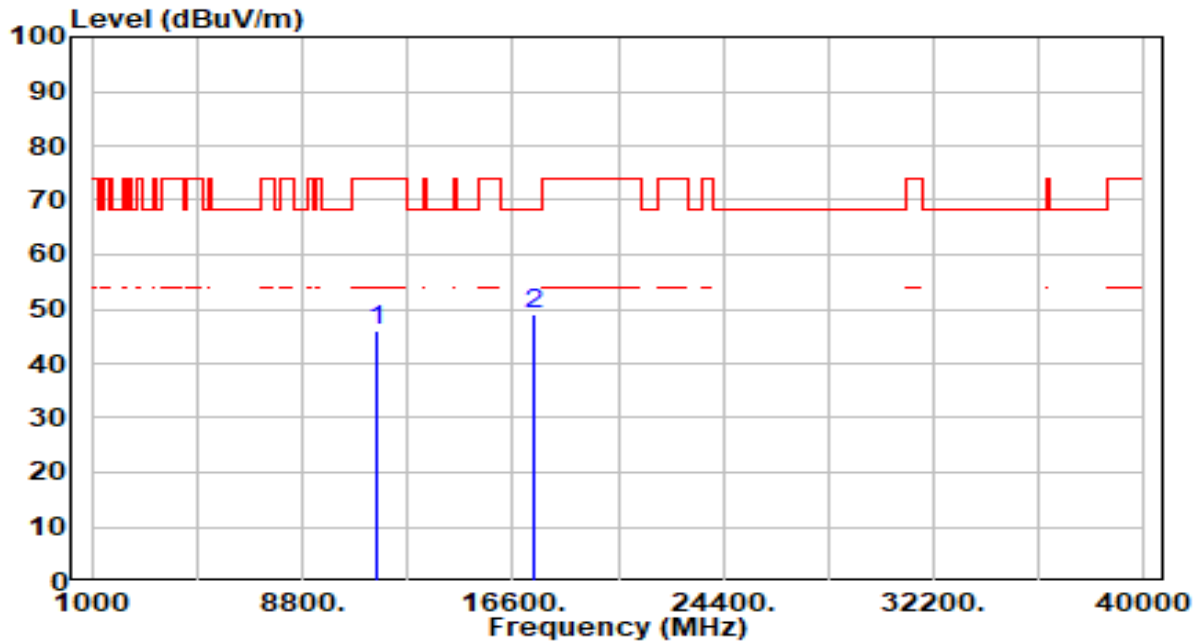


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11590.000	40.62	5.39	46.02	-27.98	74.00	200	25	Peak
2	* 17385.000	43.76	5.31	49.07	-19.13	68.20	200	338	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-80MHz_Band1_TX_CH 42 ANT 0+1	Test Voltage	By Notebook PC

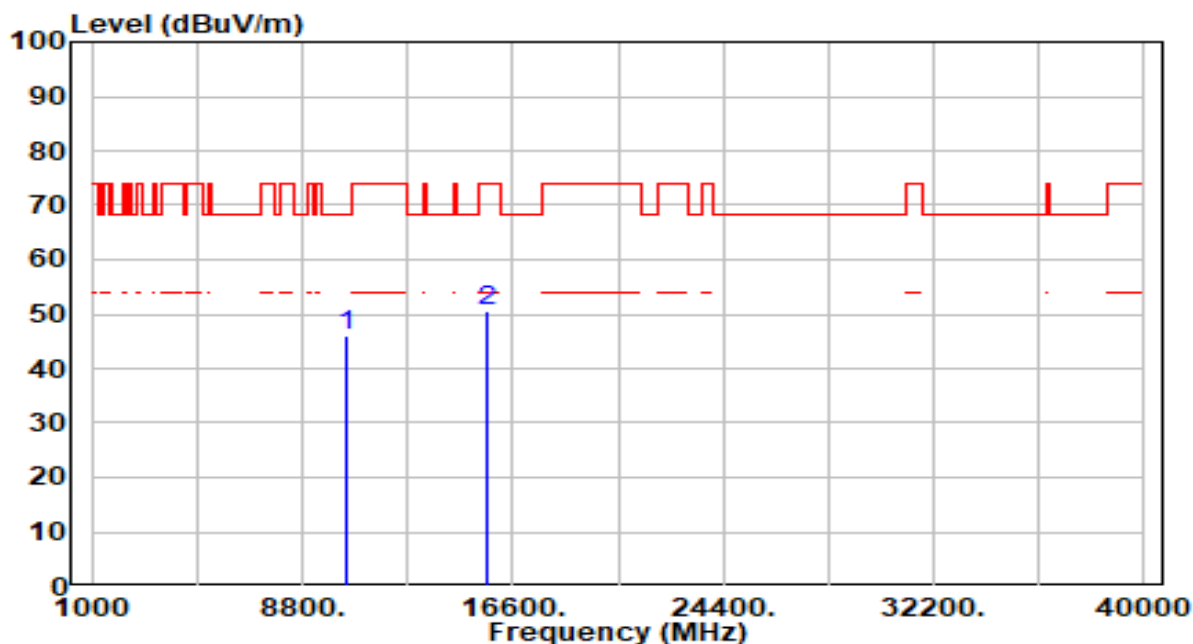


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10420.000	41.39	4.79	46.18	-22.02	68.20	200	0	Peak
2		15630.000	44.40	6.21	50.60	-23.40	74.00	200	88	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-80MHz_Band1_TX_CH 42 ANT 0+1	Test Voltage	By Notebook PC

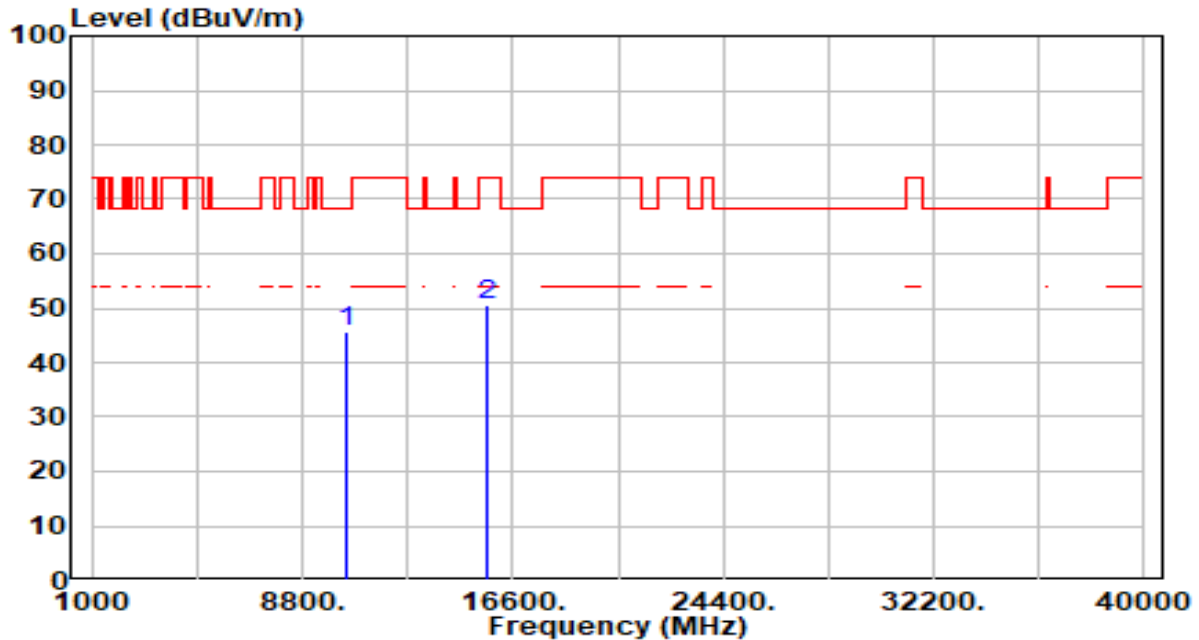


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10420.000	40.99	4.79	45.78	-22.42	68.20	200	329	Peak
2		15630.000	44.19	6.21	50.40	-23.60	74.00	200	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-80MHz_Band2_TX_CH 58 ANT 0+1	Test Voltage	By Notebook PC

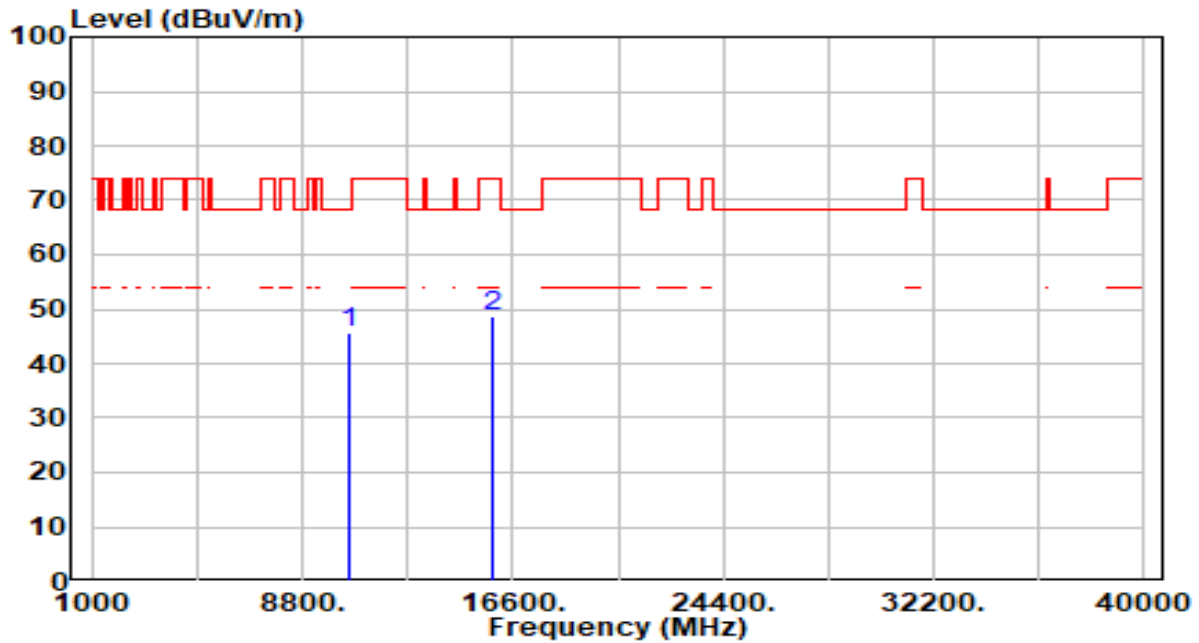


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10580.000	41.08	4.63	45.71	-22.49	68.20	200	0	Peak
2		15870.000	42.24	6.55	48.79	-25.21	74.00	200	82	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-80MHz_Band2_TX_CH 58 ANT 0+1	Test Voltage	By Notebook PC

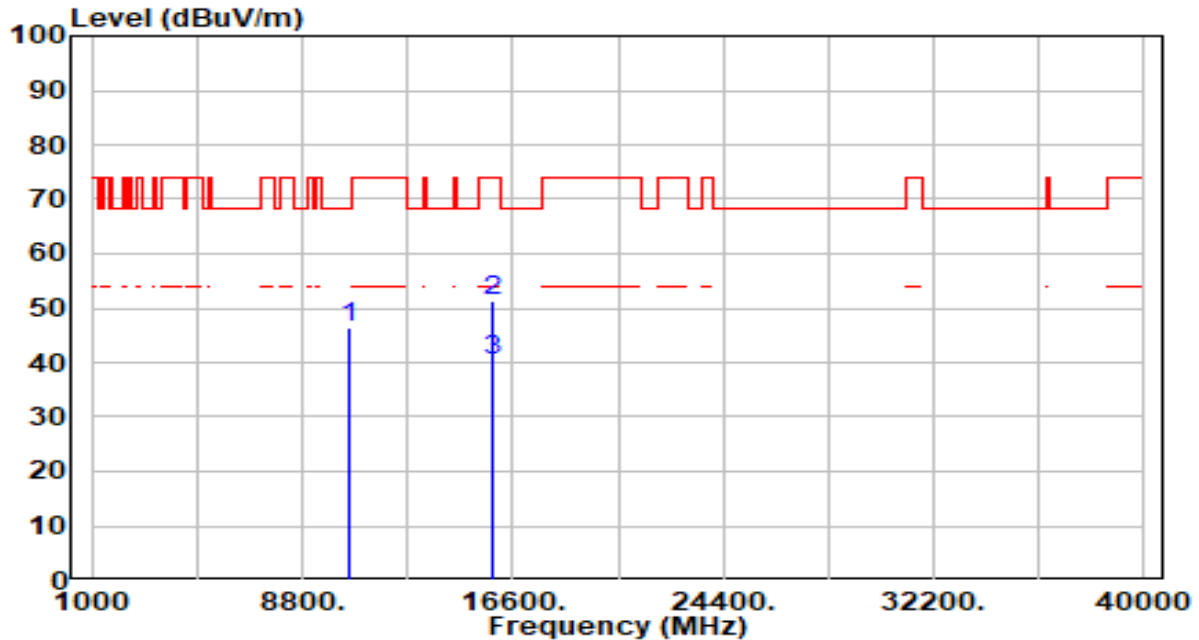


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10580.000	41.81	4.63	46.43	-21.77	68.20	200	55	Peak
2		15870.000	44.92	6.55	51.47	-22.53	74.00	200	360	Peak
3	*	15870.000	33.87	6.55	40.42	-13.58	54.00	200	360	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-80MHz_Band3_TX_CH 106 ANT 0+1	Test Voltage	By Notebook PC

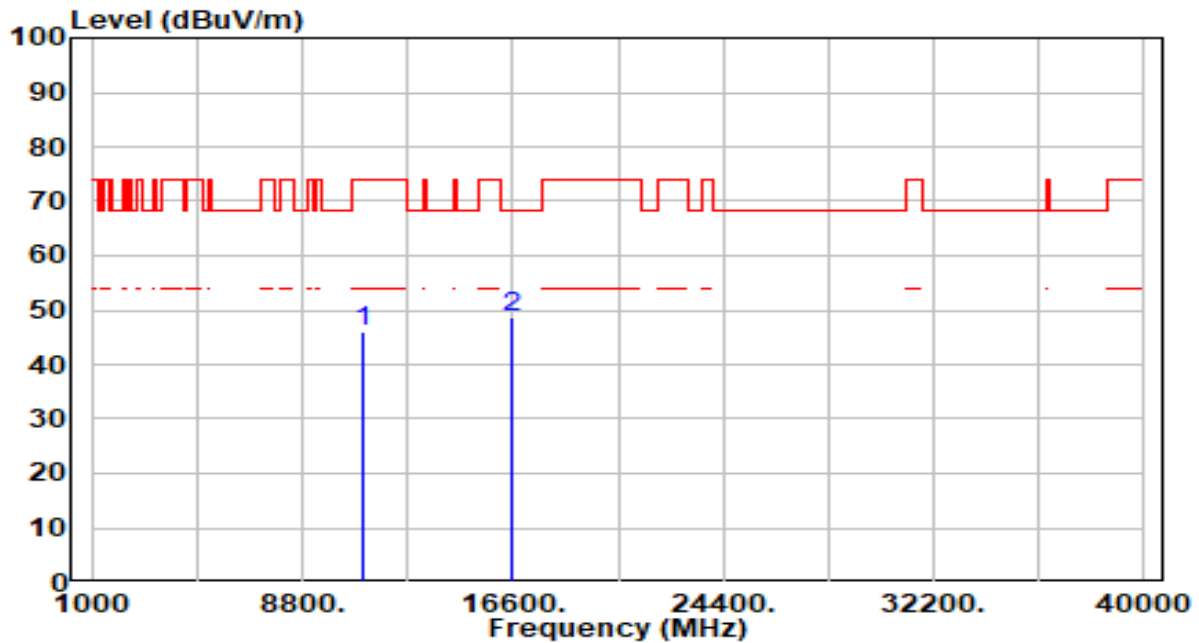


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11060.000	41.21	4.68	45.88	-28.12	74.00	200	86	Peak
2	*	16590.000	42.42	6.11	48.52	-19.68	68.20	200	319	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-80MHz_Band3_TX_CH 106 ANT 0+1	Test Voltage	By Notebook PC

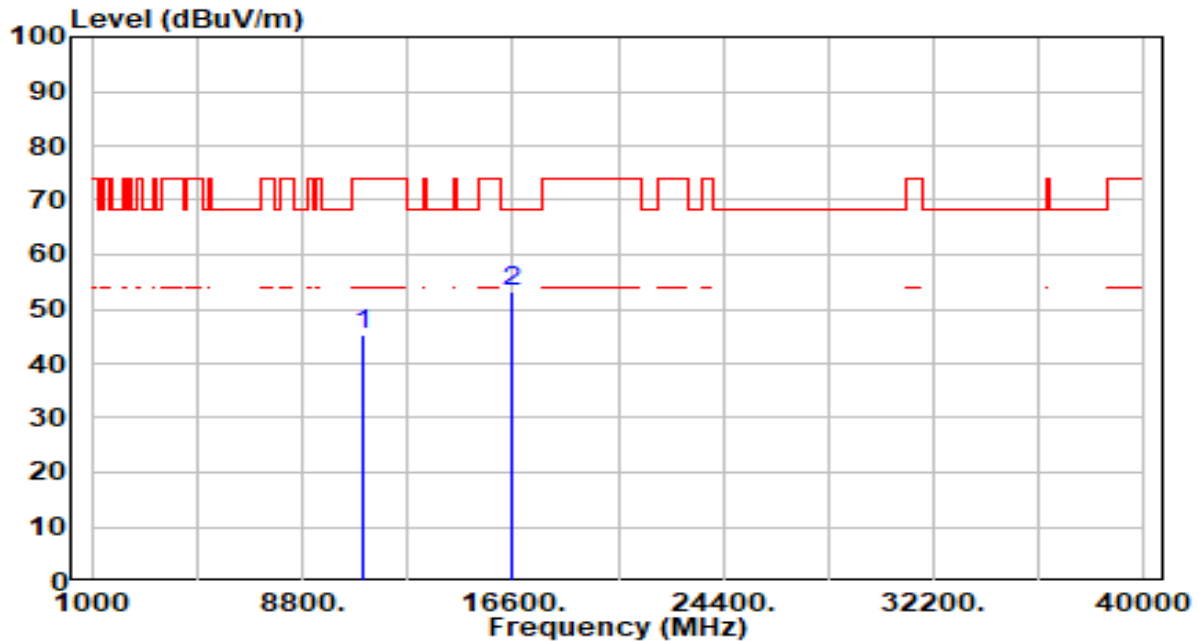


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11060.000	40.46	4.68	45.14	-28.86	74.00	200	42	Peak
2	* 16590.000	46.96	6.11	53.07	-15.13	68.20	200	327	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-80MHz_Band3_TX_CH 122 ANT 0+1	Test Voltage	By Notebook PC

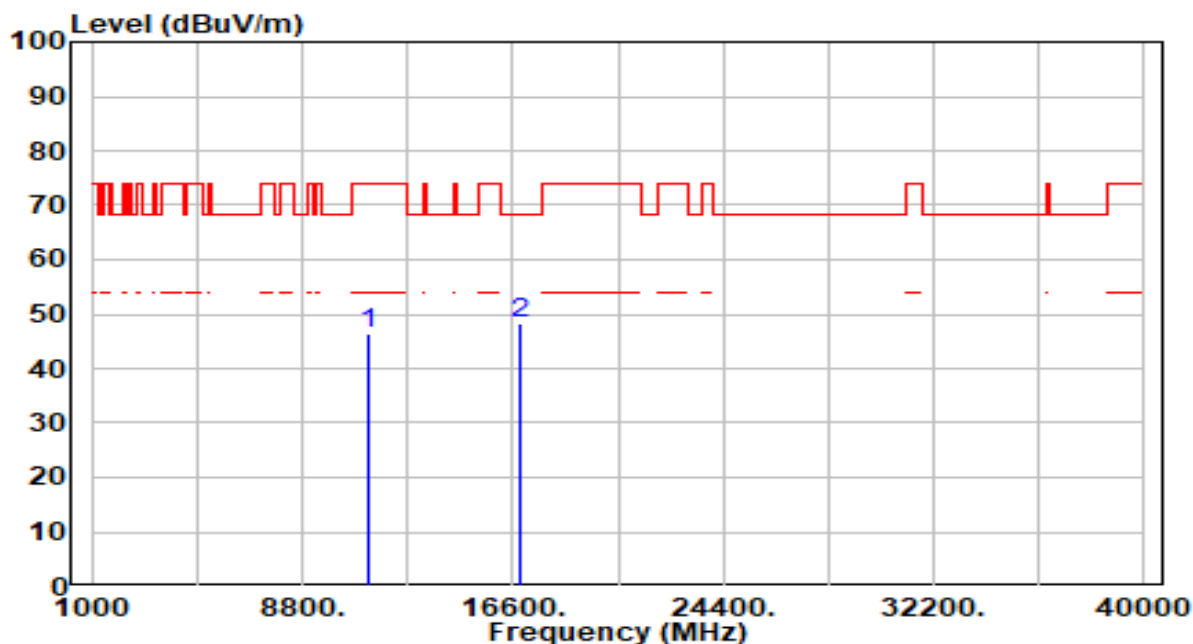


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11220.000	41.27	5.06	46.34	-27.66	74.00	200	95	Peak
2	* 16830.000	42.21	6.21	48.42	-19.78	68.20	200	44	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-80MHz_Band3_TX_CH 122 ANT 0+1	Test Voltage	By Notebook PC

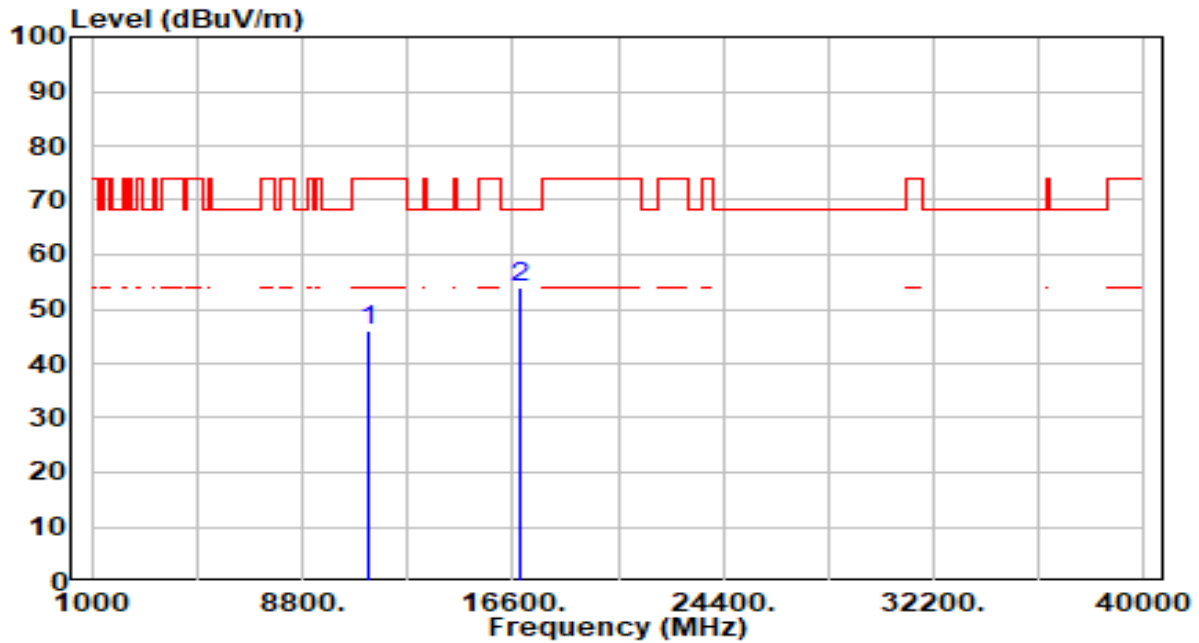


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11220.000	40.92	5.06	45.98	-28.02	74.00	200	359	Peak
2	*	16830.000	47.60	6.21	53.81	-14.39	68.20	200	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-80MHz_Band3_TX_CH 138 ANT 0+1	Test Voltage	By Notebook PC

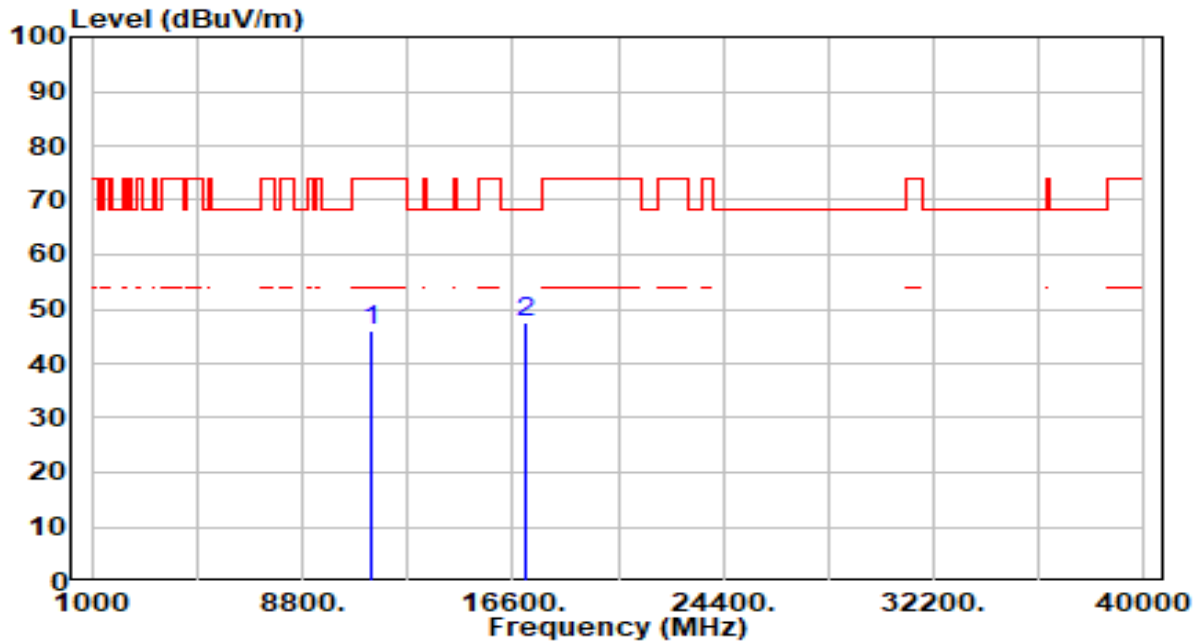


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11380.000	40.66	5.24	45.90	-28.10	74.00	200	253	Peak
2	* 17070.000	41.34	6.02	47.36	-20.84	68.20	200	288	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-80MHz_Band3_TX_CH 138 ANT 0+1	Test Voltage	By Notebook PC

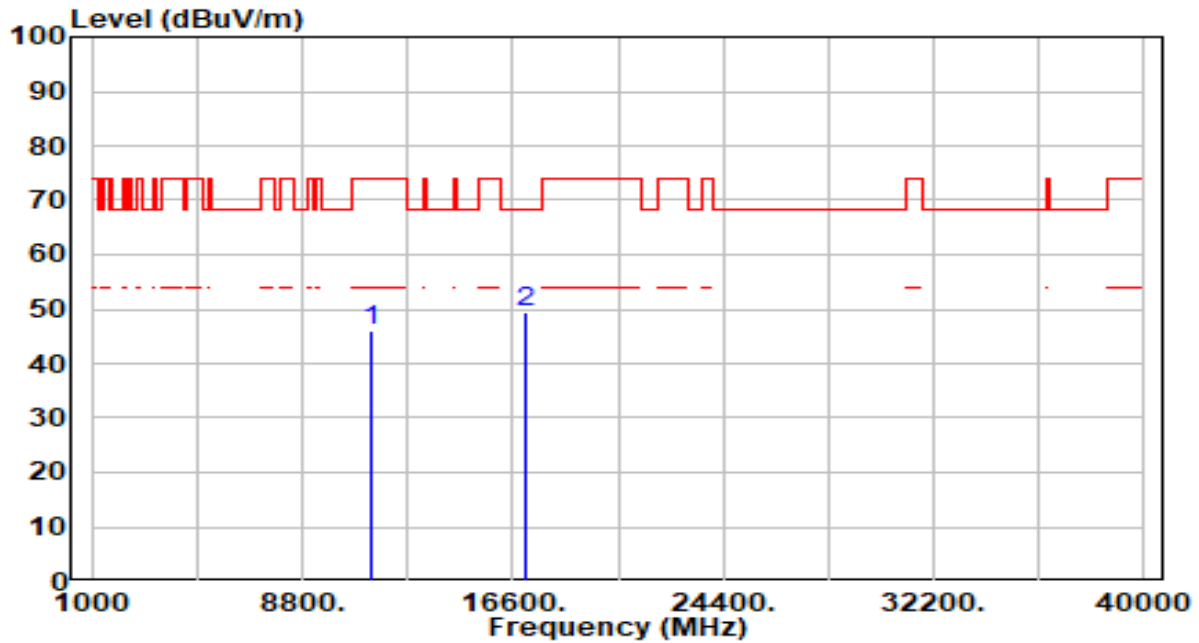


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11380.000	40.62	5.24	45.86	-28.14	74.00	200	19	Peak
2	* 17070.000	43.38	6.02	49.40	-18.80	68.20	200	350	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-80MHz_Band3_TX_CH 155 ANT 0+1	Test Voltage	By Notebook PC

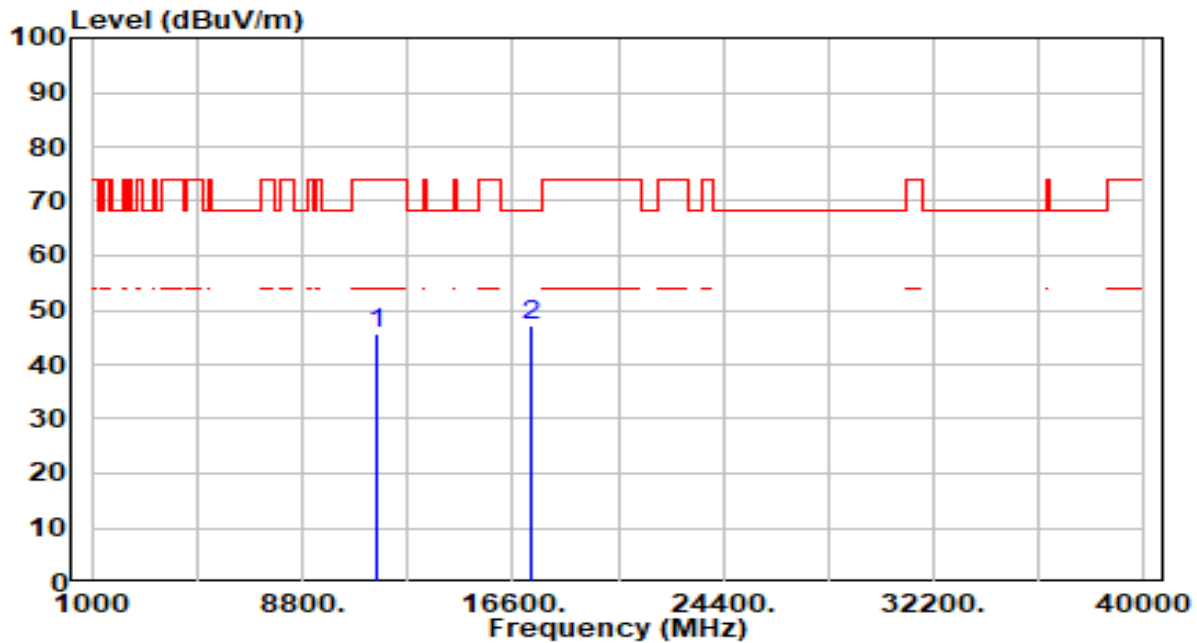


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11550.000	40.47	5.36	45.84	-28.16	74.00	200	4	Peak
2	*	17325.000	41.52	5.47	46.99	-21.21	68.20	200	70	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-80MHz_Band3_TX_CH 155 ANT 0+1	Test Voltage	By Notebook PC

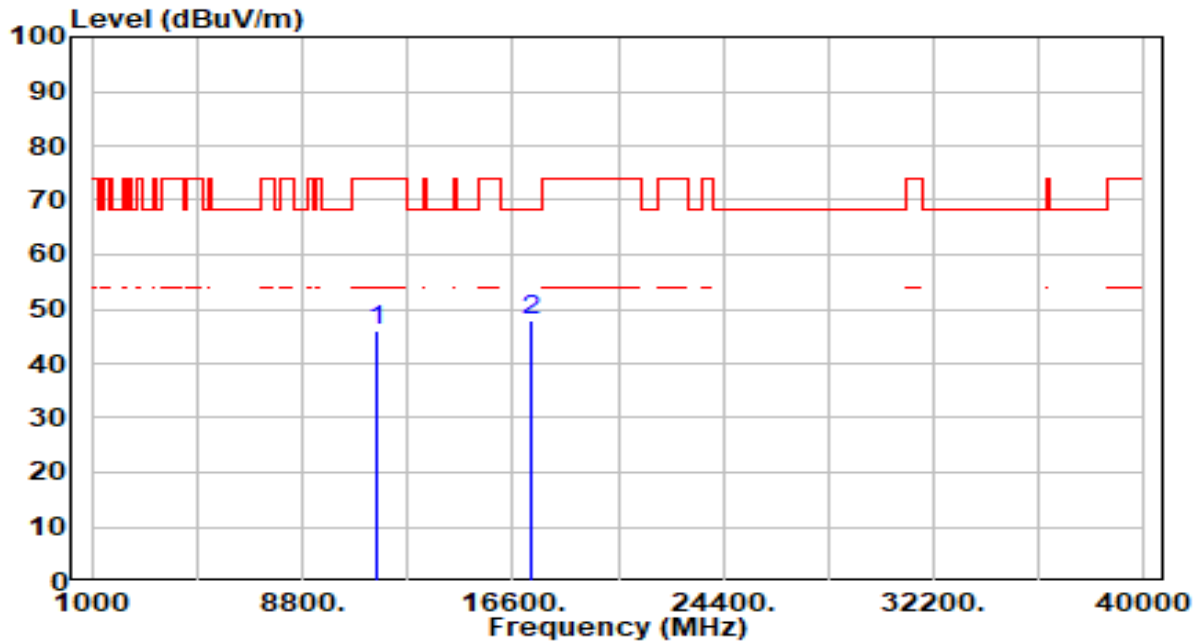


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11550.000	40.53	5.36	45.89	-28.11	74.00	200	131	Peak
2	* 17325.000	42.51	5.47	47.98	-20.22	68.20	200	359	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-160MHz_Band1,2_TX_CH 50 ANT 0+1	Test Voltage	By Notebook PC

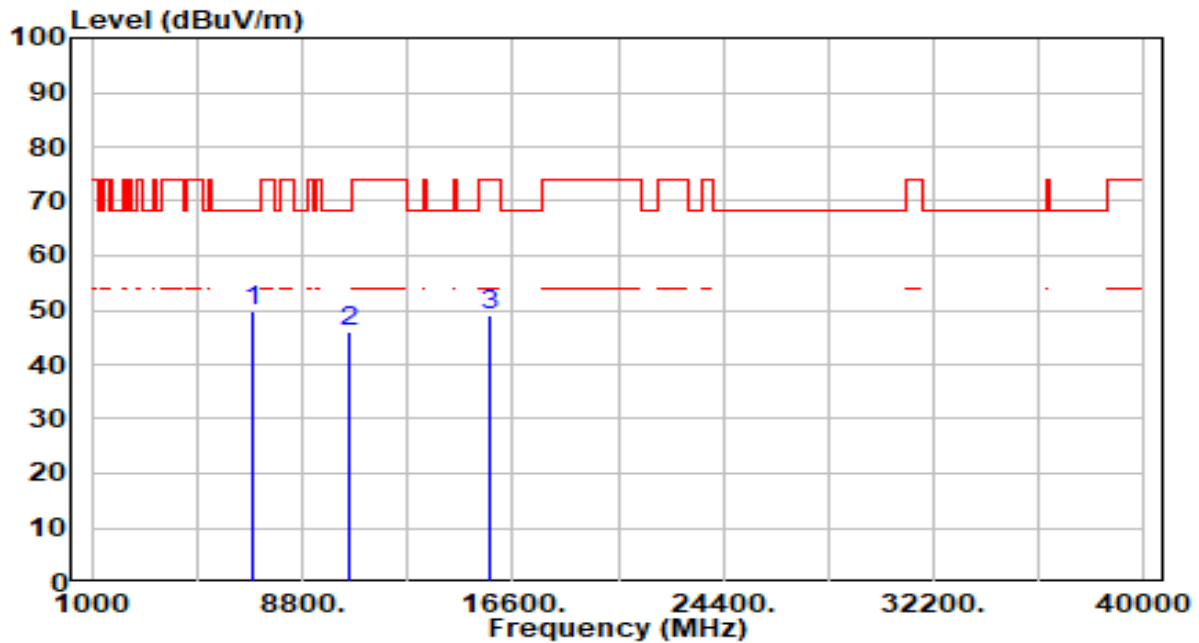


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	7000.000	44.32	5.40	49.72	-18.48	68.20	200	315	Peak
2		10500.000	41.38	4.68	46.06	-22.14	68.20	200	238	Peak
3		15750.000	42.56	6.45	49.00	-25.00	74.00	200	210	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-160MHz_Band1,2_TX_CH 50 ANT 0+1	Test Voltage	By Notebook PC

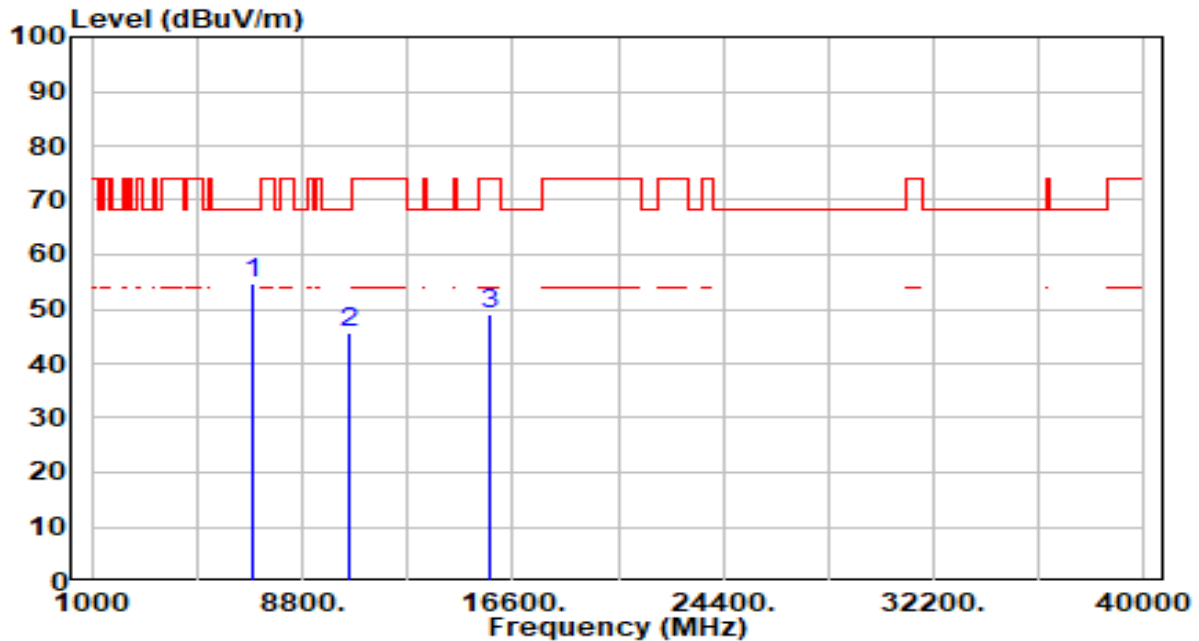


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	7000.000	49.18	5.40	54.58	-13.62	68.20	200	251	Peak
2		10500.000	41.15	4.68	45.83	-22.37	68.20	200	251	Peak
3		15750.000	42.53	6.45	48.98	-25.02	74.00	200	134	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-160MHz_Band3_TX_CH 114 ANT 0+1	Test Voltage	By Notebook PC

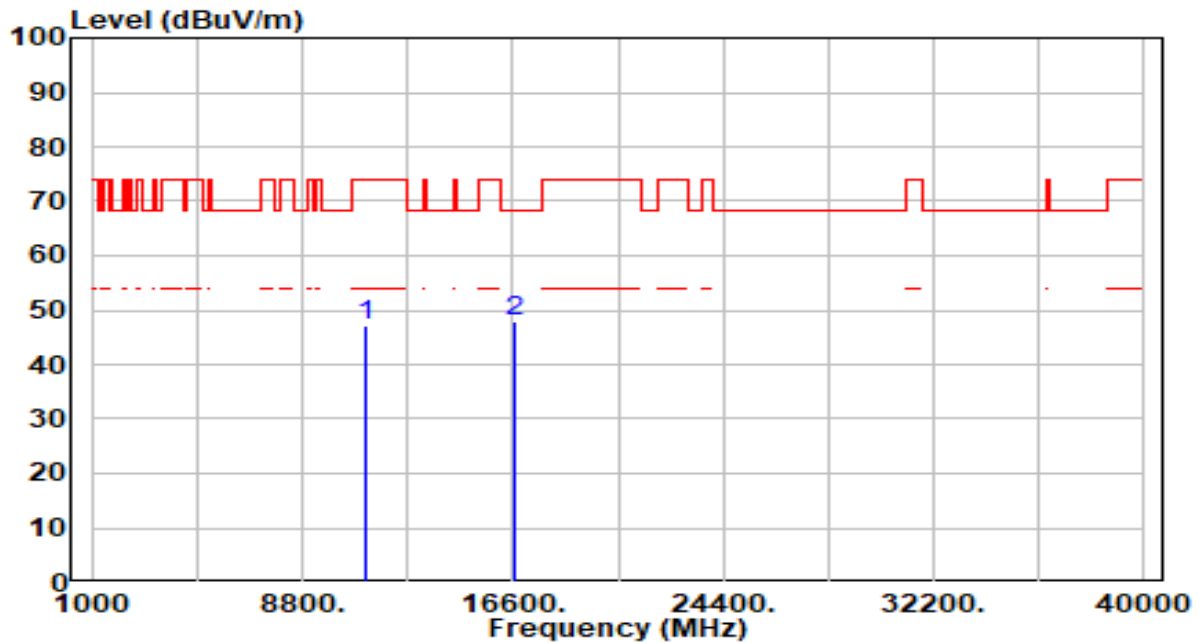


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11140.000	42.15	4.89	47.04	-26.96	74.00	200	183	Peak
2	*	16710.000	41.62	6.17	47.80	-20.40	68.20	200	143	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-19
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	19°C /48%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-160MHz_Band3_TX_CH 114 ANT 0+1	Test Voltage	By Notebook PC

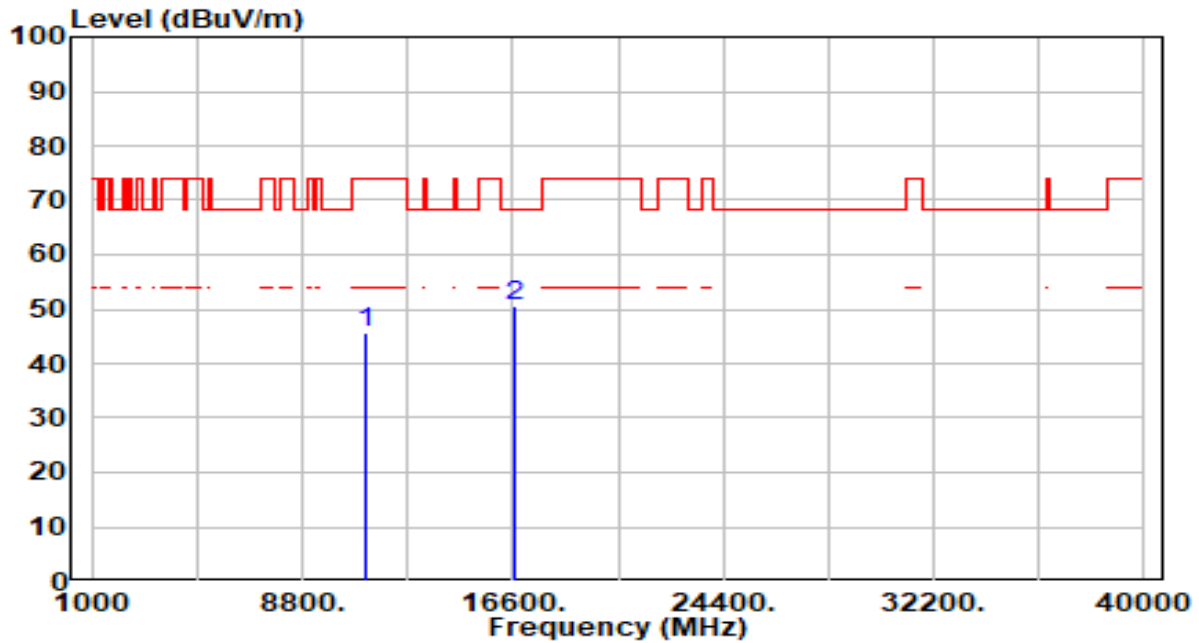


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11140.000	40.92	4.89	45.80	-28.20	74.00	200	202	Peak
2	* 16710.000	44.28	6.17	50.45	-17.75	68.20	200	0	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-20MHz_26Tone_RU0_Band1_TX_CH36 ANT 0+1	Test Voltage	By Notebook PC

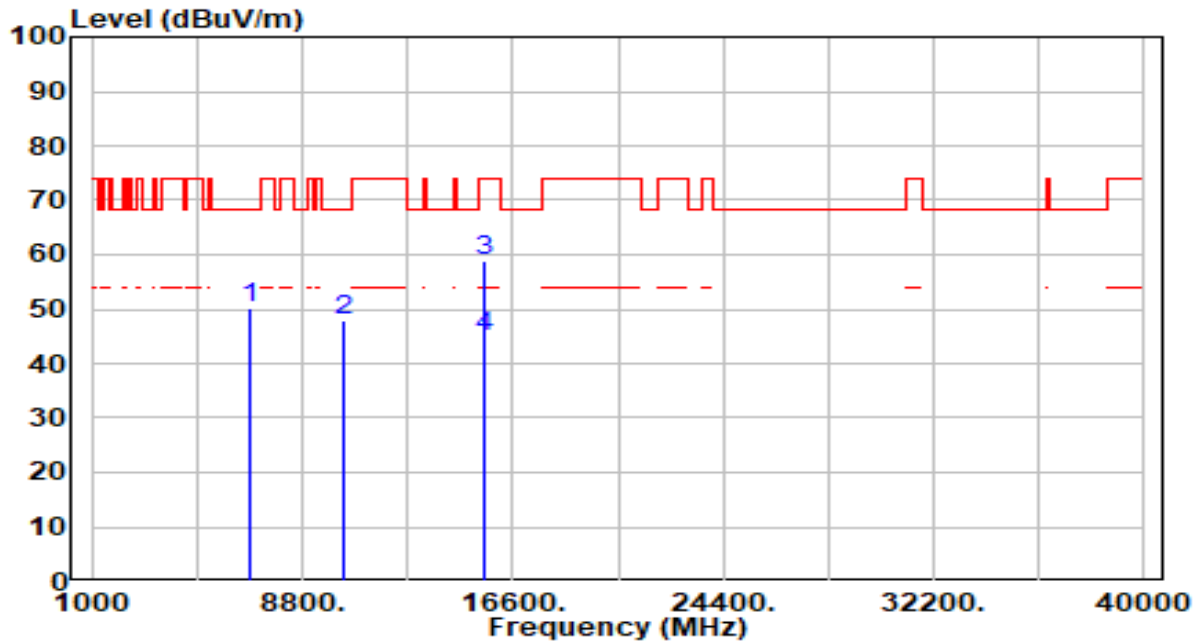


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	6907.000	44.96	5.39	50.34	-17.86	68.20	200	301	Peak
2	10360.000	43.15	4.87	48.02	-20.18	68.20	200	360	Peak
3	* 15540.000	52.54	6.21	58.75	-15.25	74.00	100	74	Peak
4	* 15540.000	38.56	6.21	44.77	-9.23	54.00	100	74	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-20MHz_26Tone_RU0_Band1_TX_CH36 ANT 0+1	Test Voltage	By Notebook PC

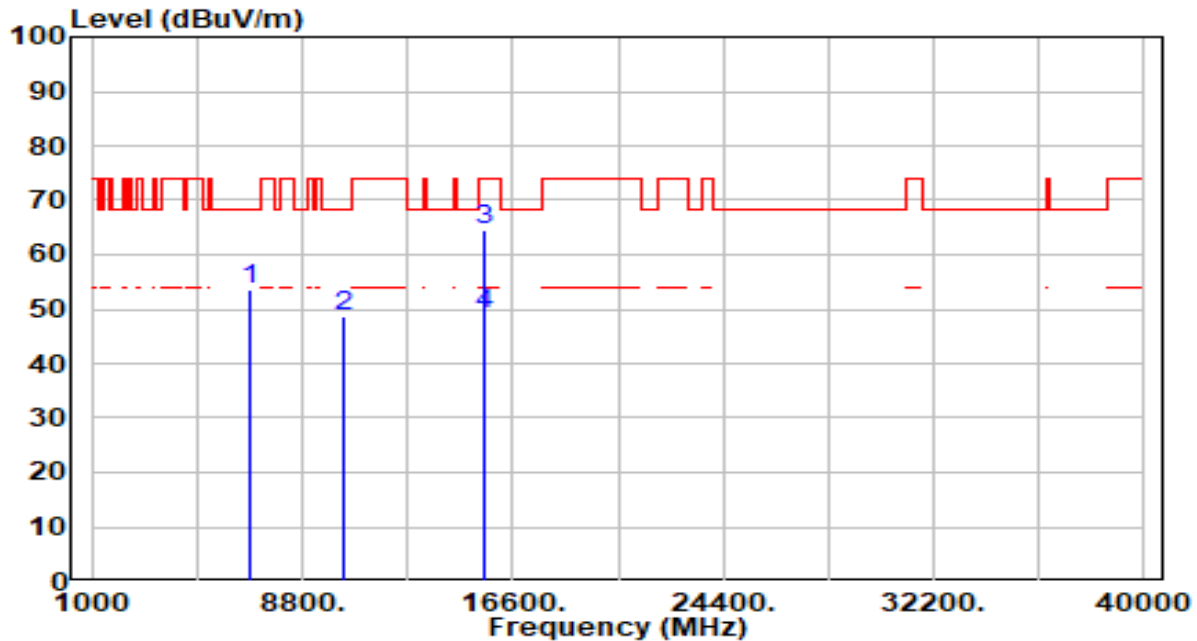


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	6907.000	48.15	5.39	53.54	-14.66	68.20	100	246	Peak
2	10360.000	43.86	4.87	48.73	-19.47	68.20	143	360	Peak
3	* 15540.000	58.18	6.21	64.39	-9.61	74.00	122	4	Peak
4	* 15540.000	42.97	6.21	49.18	-4.82	54.00	122	4	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_52Tone_RU74_Band1_TX_CH 36 ANT 0+1	Test Voltage	By Notebook PC

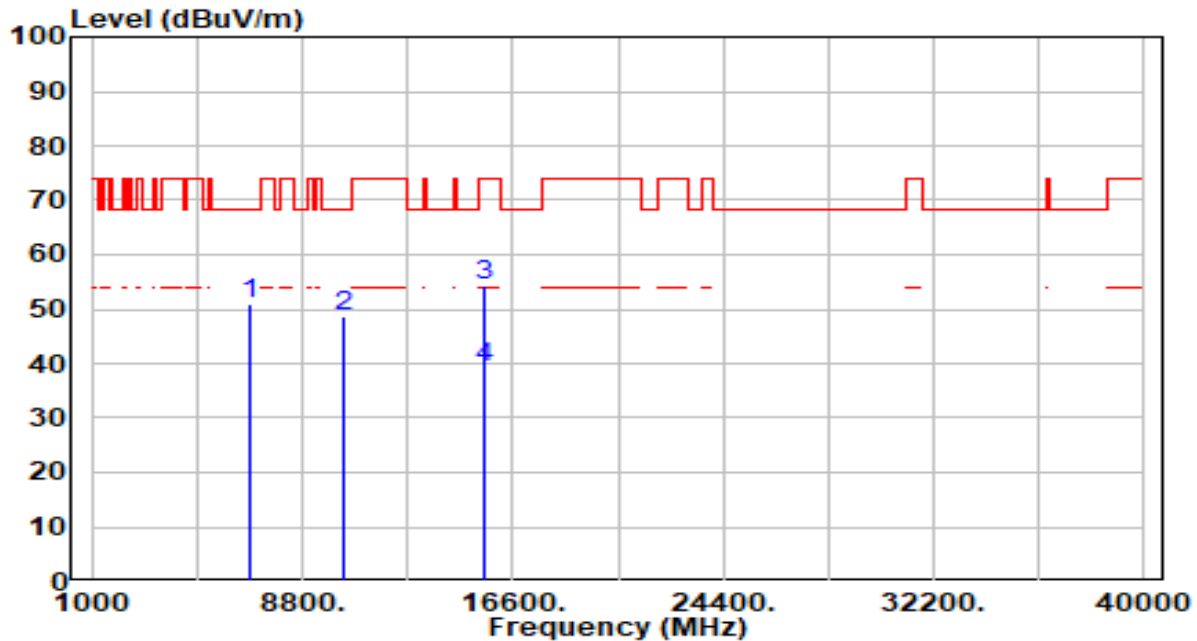


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	6905.059	45.58	5.39	50.96	-17.24	68.20	100	238	Peak
2		10360.000	43.70	4.87	48.57	-19.63	68.20	100	69	Peak
3		15540.000	48.28	6.21	54.49	-19.51	74.00	100	14	Peak
4	*	15540.000	33.00	6.21	39.21	-14.79	54.00	100	14	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_52Tone_RU74_Band1_TX_CH 36 ANT 0+1	Test Voltage	By Notebook PC

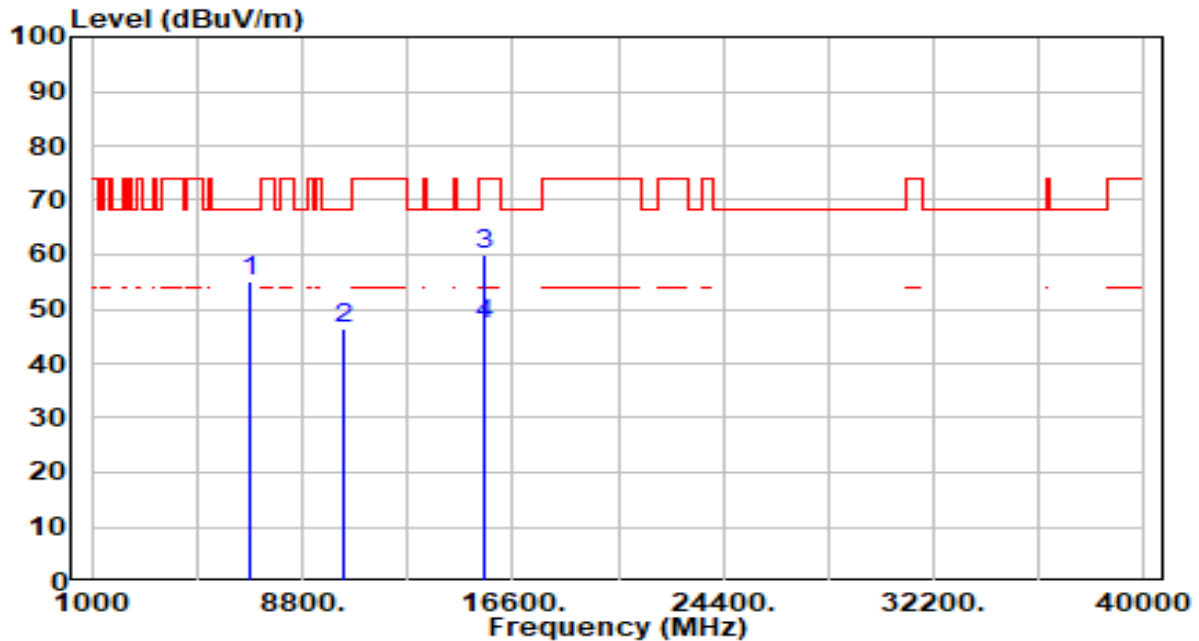


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	6905.059	49.67	5.39	55.06	-13.14	68.20	100	252	Peak
2		10360.000	41.70	4.87	46.57	-21.63	68.20	100	41	Peak
3		15540.000	53.84	6.21	60.05	-13.95	74.00	100	36	Peak
4	*	15540.000	40.84	6.21	47.05	-6.95	54.00	100	36	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_106Tone_RU106_Band1_TX_CH 36 ANT 0+1	Test Voltage	By Notebook PC

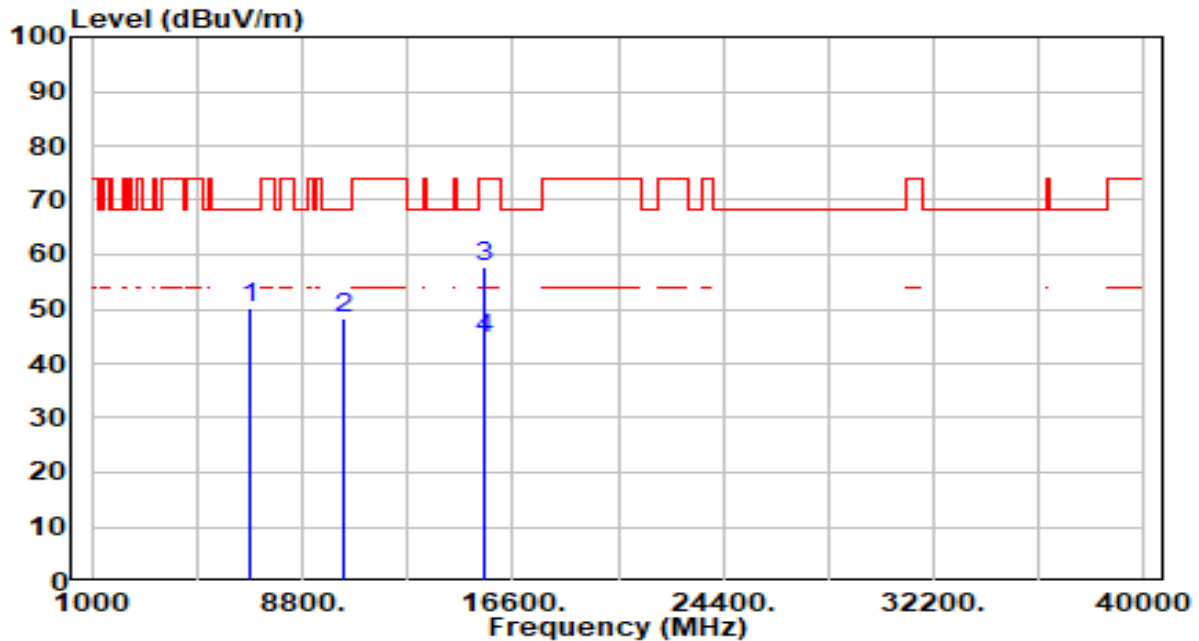


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	6906.000	44.84	5.39	50.22	-17.98	68.20	100	242	Peak
2	10360.000	43.36	4.87	48.23	-19.97	68.20	100	71	Peak
3	* 15540.000	51.60	6.21	57.81	-16.19	74.00	100	19	Peak
4	* 15540.000	38.50	6.21	44.71	-9.29	54.00	100	19	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_106Tone_RU106_Band1_TX_CH 36 ANT 0+1	Test Voltage	By Notebook PC

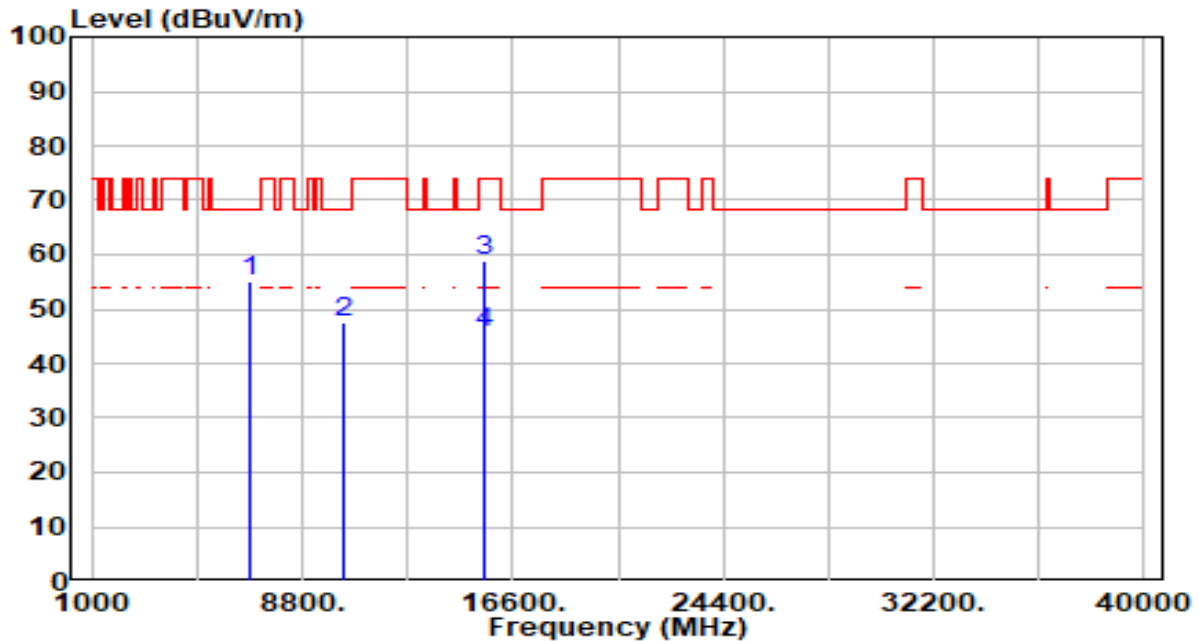


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	6907.000	49.65	5.39	55.04	-13.16	68.20	100	248	Peak
2		10360.000	42.68	4.87	47.55	-20.65	68.20	100	136	Peak
3		15540.000	52.59	6.21	58.80	-15.20	74.00	100	2	Peak
4	*	15540.000	39.60	6.21	45.81	-8.19	54.00	100	2	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_242Tone_RU122_Band1_TX_CH 36 ANT 0+1	Test Voltage	By Notebook PC

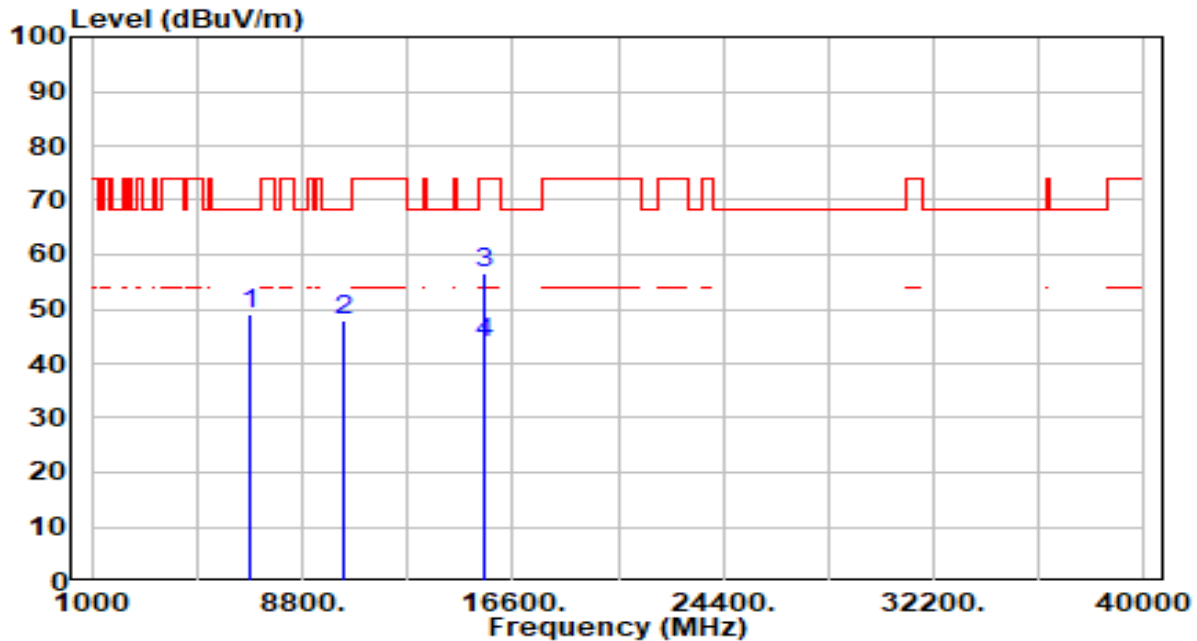


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	6906.000	43.57	5.39	48.95	-19.25	68.20	100	260	Peak
2	10360.000	43.21	4.87	48.08	-20.12	68.20	100	320	Peak
3	* 15540.000	50.30	6.21	56.51	-17.49	74.00	100	9	Peak
4	* 15540.000	37.50	6.21	43.71	-10.29	54.00	100	9	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_242Tone_RU122_Band1_TX_CH 36 ANT 0+1	Test Voltage	By Notebook PC

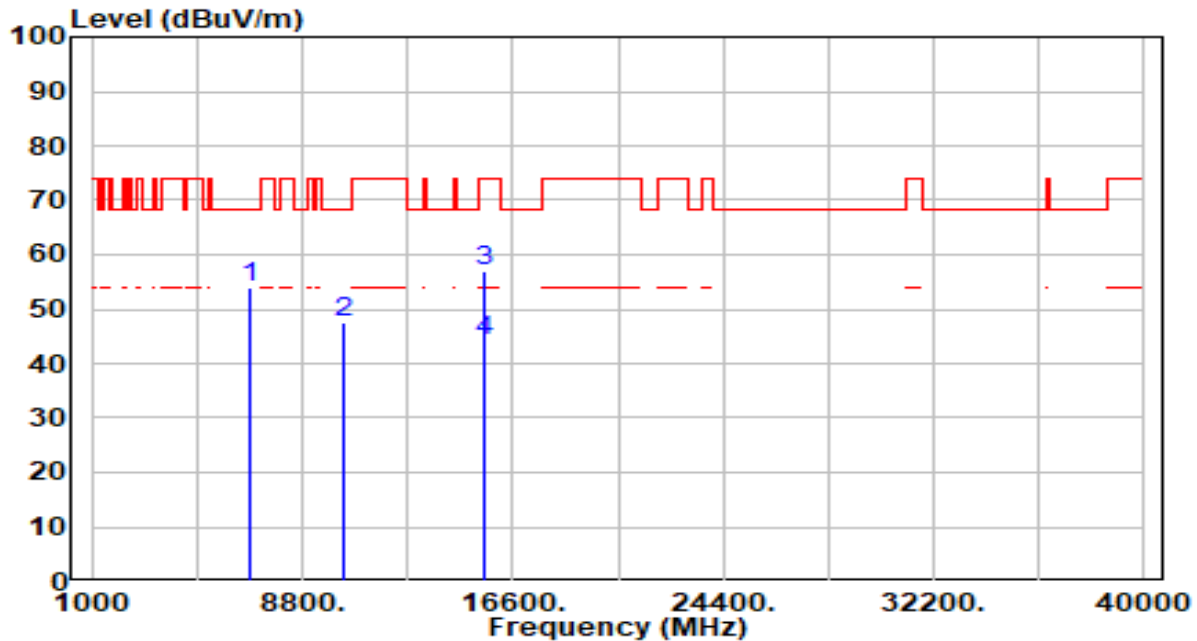


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	6907.000	48.63	5.39	54.01	-14.19	68.20	100	252	Peak
2		10360.000	42.80	4.87	47.68	-20.52	68.20	100	192	Peak
3		15540.000	50.93	6.21	57.14	-16.86	74.00	100	34	Peak
4	*	15540.000	37.80	6.21	44.01	-9.99	54.00	100	34	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-20MHz_26Tone_RU8_Band2_TX_CH64 ANT 0+1	Test Voltage	By Notebook PC

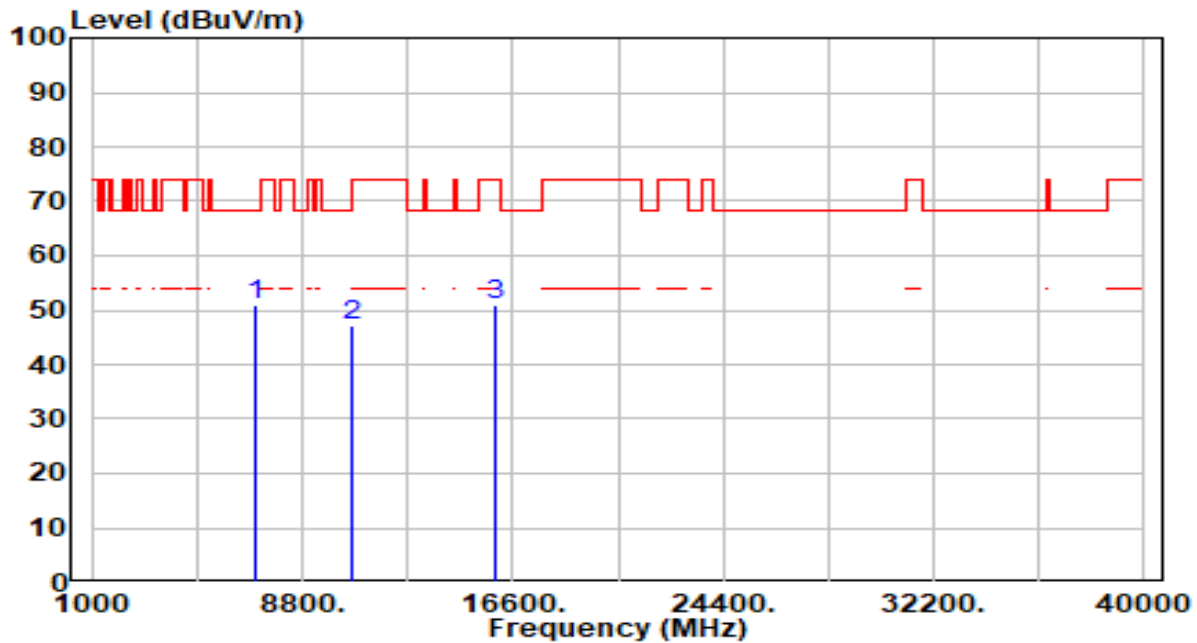


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	7094.000	45.60	5.46	51.06	-17.14	68.20	100	285	Peak
2		10640.000	42.39	4.62	47.01	-26.99	74.00	100	360	Peak
3		15960.000	44.31	6.55	50.86	-23.14	74.00	100	118	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-20MHz_26Tone_RU8_Band2_TX_CH64 ANT 0+1	Test Voltage	By Notebook PC

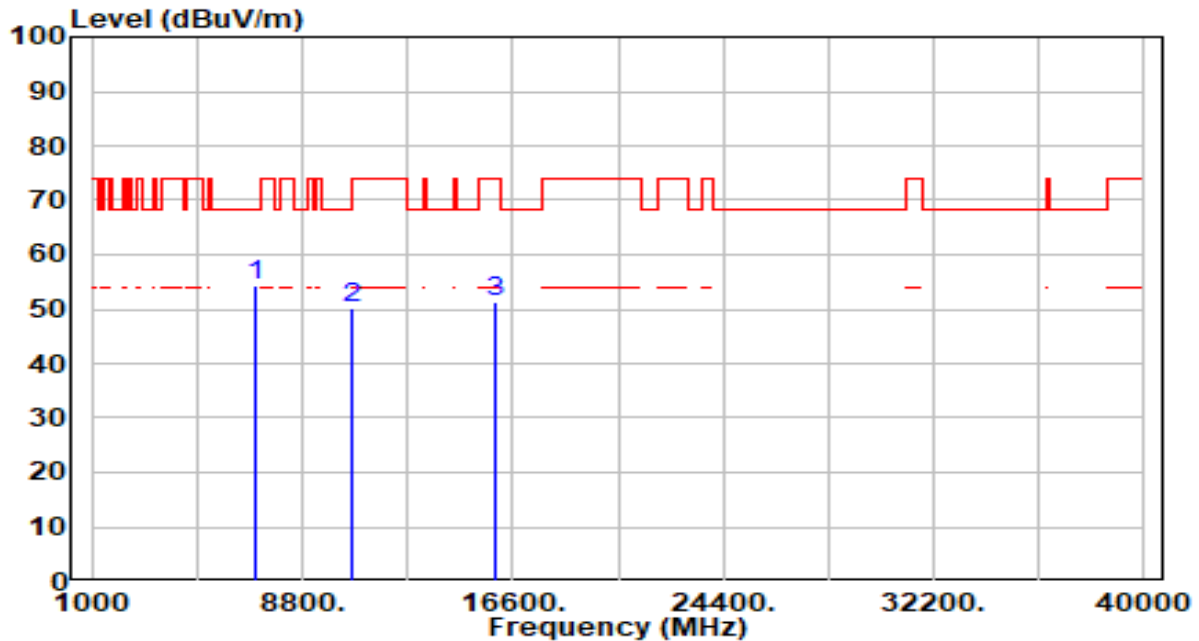


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	7094.000	49.01	5.46	54.47	-13.73	68.20	100	205	Peak
2		10640.000	45.46	4.62	50.09	-23.91	74.00	200	360	Peak
3		15960.000	43.93	6.55	50.48	-23.52	74.00	100	76	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_52Tone_RU77_Band1_TX_CH 64 ANT 0+1	Test Voltage	By Notebook PC

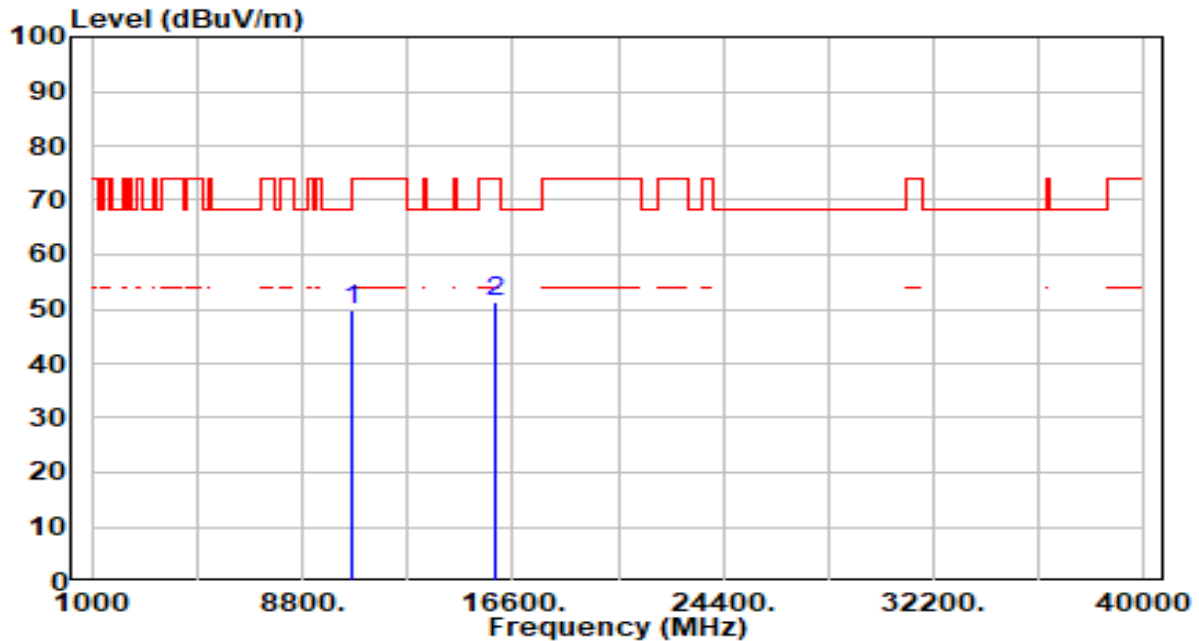


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10640.000	45.04	4.62	49.66	-24.34	74.00	100	360	Peak
2	* 15960.000	43.74	6.55	50.29	-23.71	74.00	100	83	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_52Tone_RU77_Band2_TX_CH 64 ANT 0+1	Test Voltage	By Notebook PC

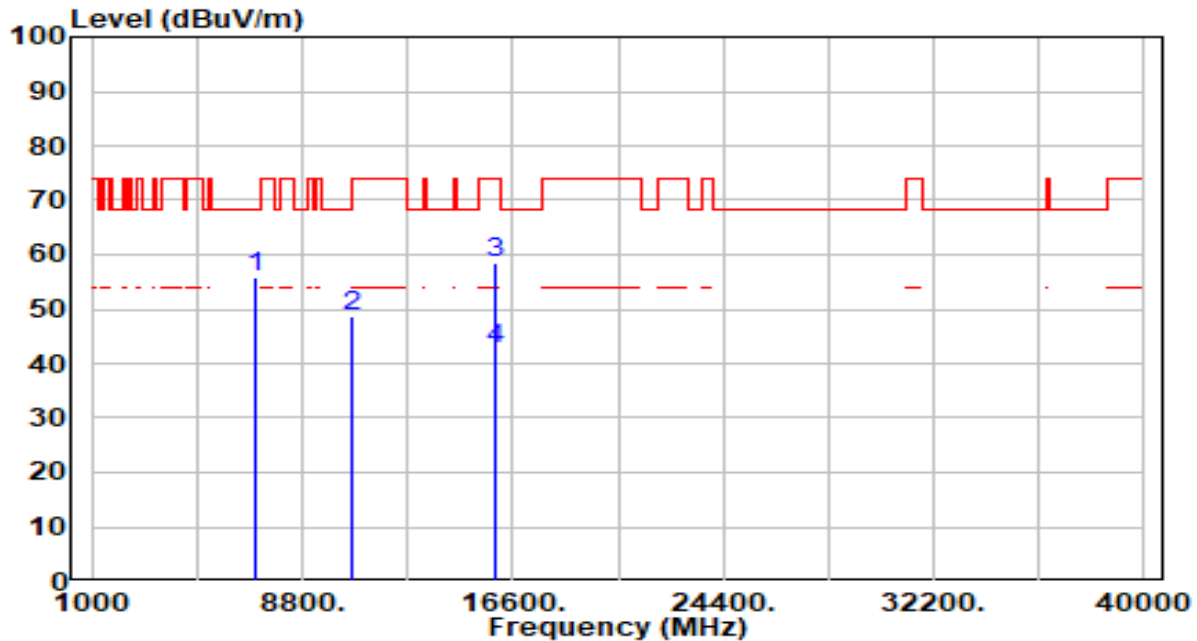


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7093.176	50.44	5.46	55.90	-12.30	68.20	100	213	Peak
2	10640.000	43.89	4.62	48.51	-25.49	74.00	100	0	Peak
3	15960.000	51.86	6.55	58.41	-15.59	74.00	100	39	Peak
4	* 15960.000	36.00	6.55	42.55	-11.45	54.00	100	39	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_106Tone_RU107_Band2_TX_CH 64 ANT 0+1	Test Voltage	By Notebook PC

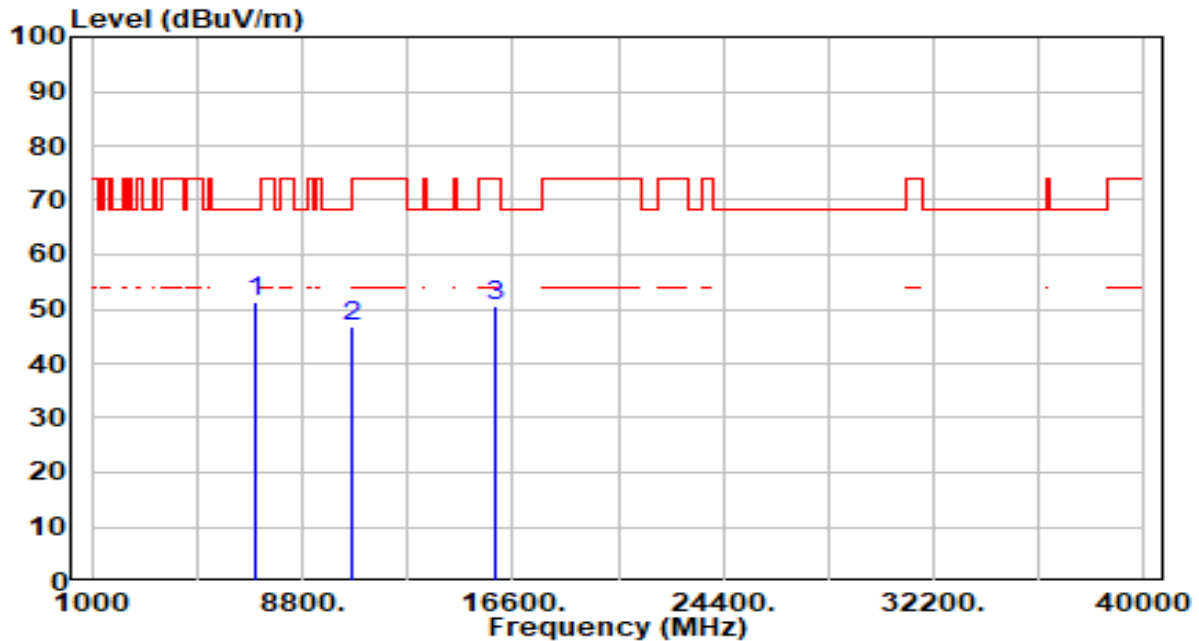


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	7093.000	45.83	5.46	51.29	-16.91	68.20	100	52	Peak
2		10640.000	42.32	4.62	46.94	-27.06	74.00	100	86	Peak
3		15960.000	44.04	6.55	50.59	-23.41	74.00	100	26	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_106Tone_RU107_Band2_TX_CH 64 ANT 0+1	Test Voltage	By Notebook PC

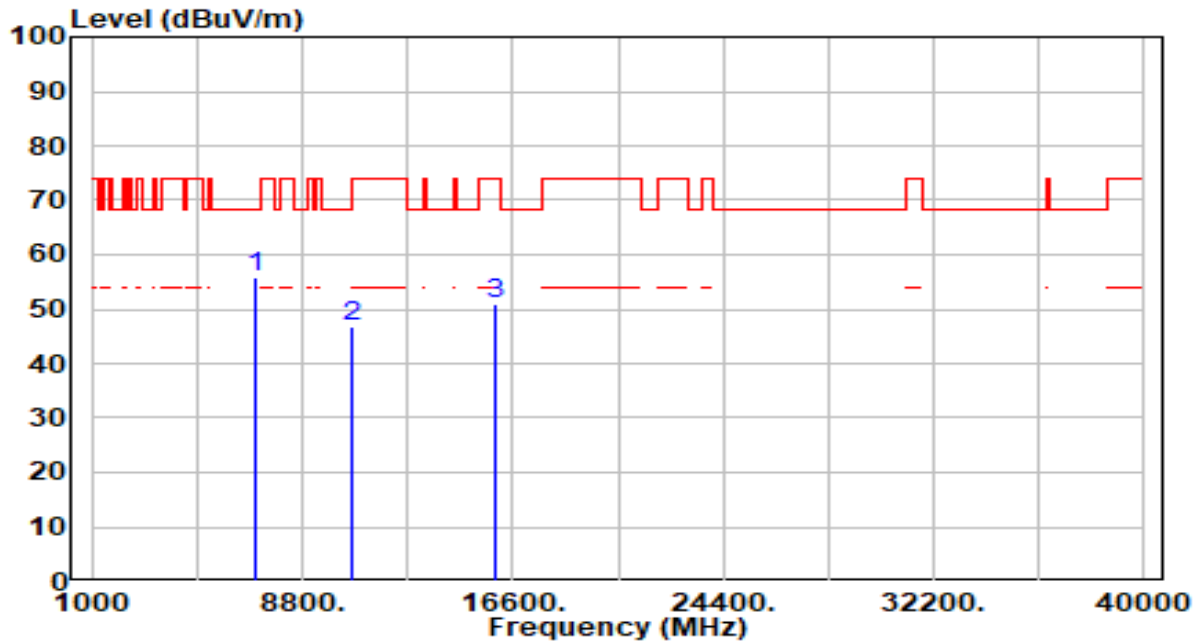


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	7093.000	50.54	5.46	55.99	-12.21	68.20	100	213	Peak
2		10640.000	42.03	4.62	46.65	-27.35	74.00	100	256	Peak
3		15960.000	43.52	6.55	50.07	-23.93	74.00	100	38	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_242Tone_RU122_Band2_TX_CH 64 ANT 0+1	Test Voltage	By Notebook PC

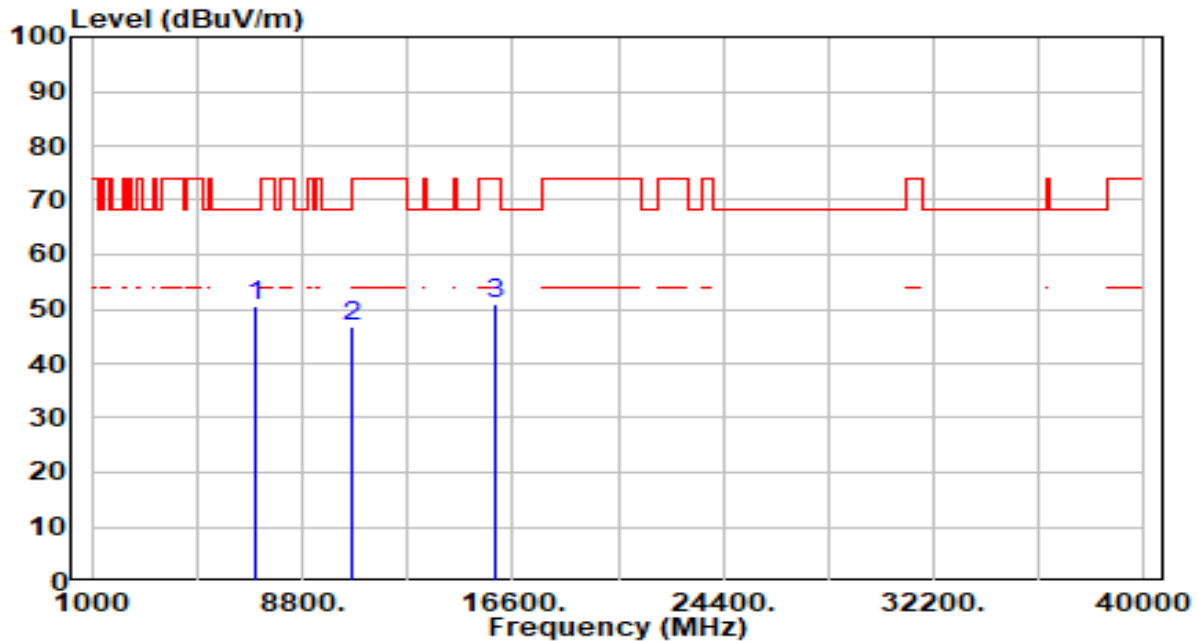


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	7093.000	45.10	5.46	50.55	-17.65	68.20	100	355	Peak
2		10640.000	42.10	4.62	46.72	-27.28	74.00	100	197	Peak
3		15960.000	44.40	6.55	50.95	-23.05	74.00	100	200	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-23
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_242Tone_RU122_Band2_TX_CH 64 ANT 0+1	Test Voltage	By Notebook PC

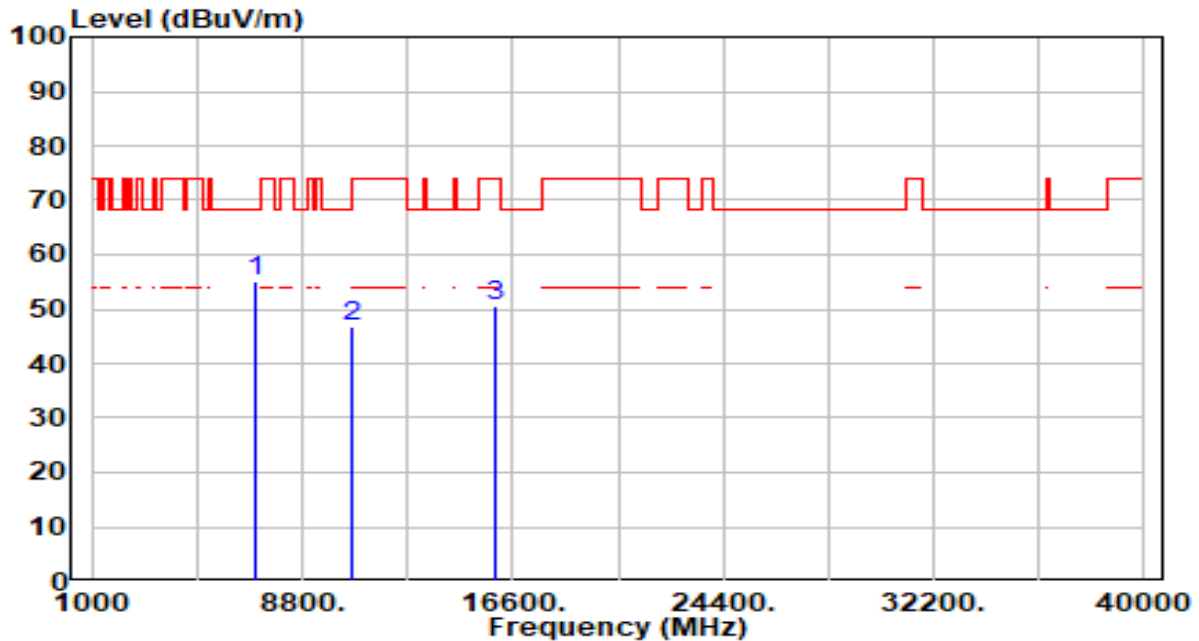


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	7093.000	49.69	5.46	55.15	-13.05	68.20	100	217	Peak
2		10640.000	42.24	4.62	46.87	-27.13	74.00	100	65	Peak
3		15960.000	43.89	6.55	50.44	-23.56	74.00	100	42	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_26Tone_RU0_Band3_TX_CH 100 ANT 0+1	Test Voltage	By Notebook PC

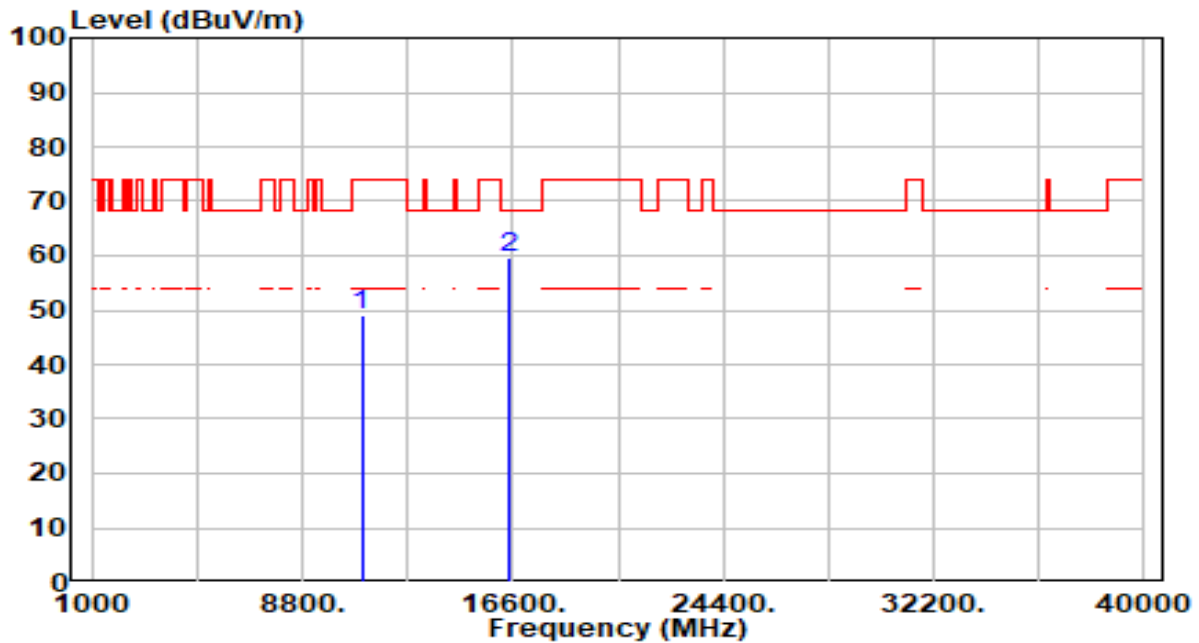


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11000.000	44.41	4.52	48.93	-25.07	74.00	100	360	Peak
2	*	16500.000	53.66	6.10	59.76	-8.44	68.20	100	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_26Tone_RU0_Band3_TX_CH 100 ANT 0+1	Test Voltage	By Notebook PC

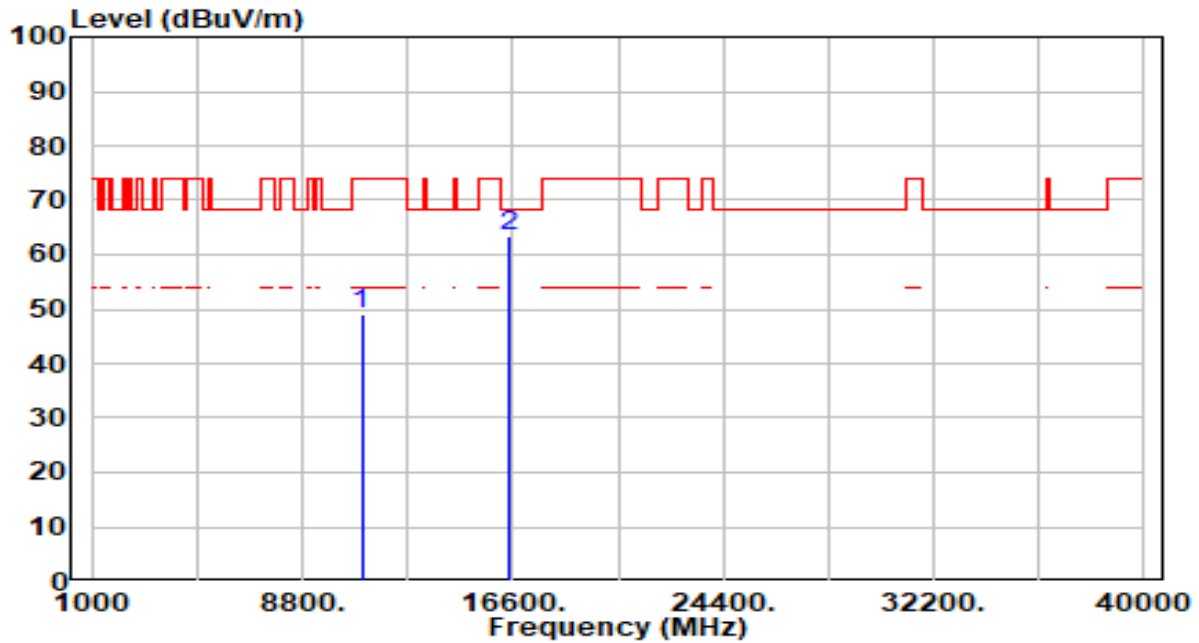


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11000.000	44.66	4.52	49.18	-24.82	74.00	100	282	Peak
2	*	16500.000	57.45	6.10	63.55	-4.65	68.20	100	342	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_26Tone_RU8_Band3_TX_CH 140 ANT 0+1	Test Voltage	By Notebook PC

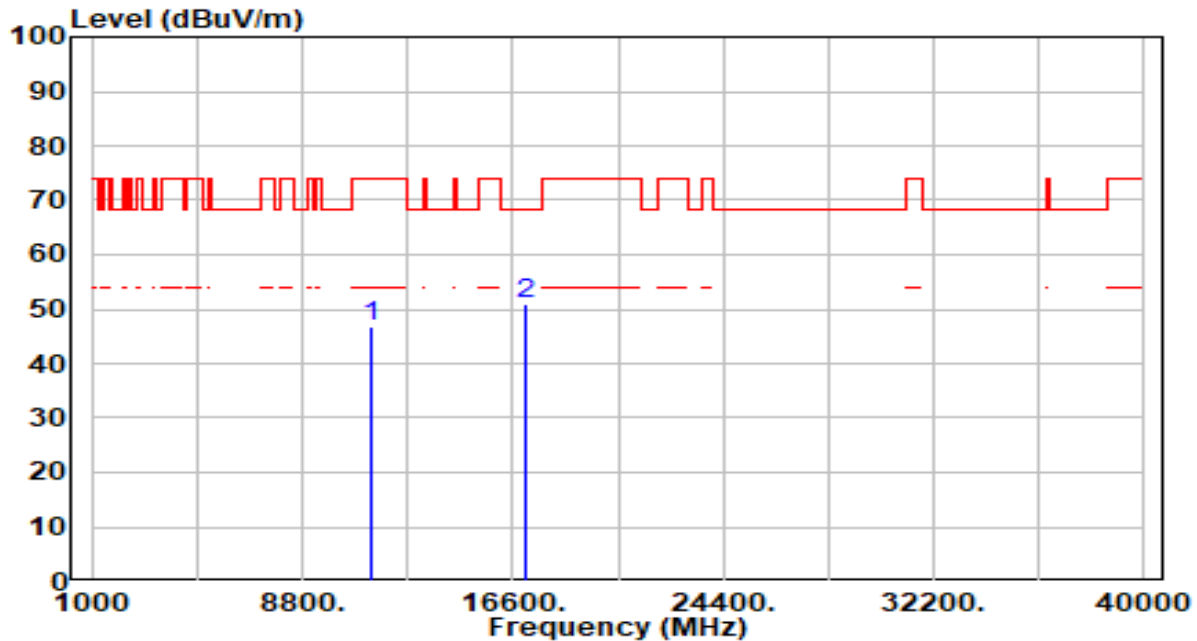


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11400.000	41.66	5.26	46.93	-27.07	74.00	100	27	Peak
2	* 17100.000	44.88	5.97	50.86	-17.34	68.20	100	301	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_26Tone_RU8_Band3_TX_CH 140 ANT 0+1	Test Voltage	By Notebook PC

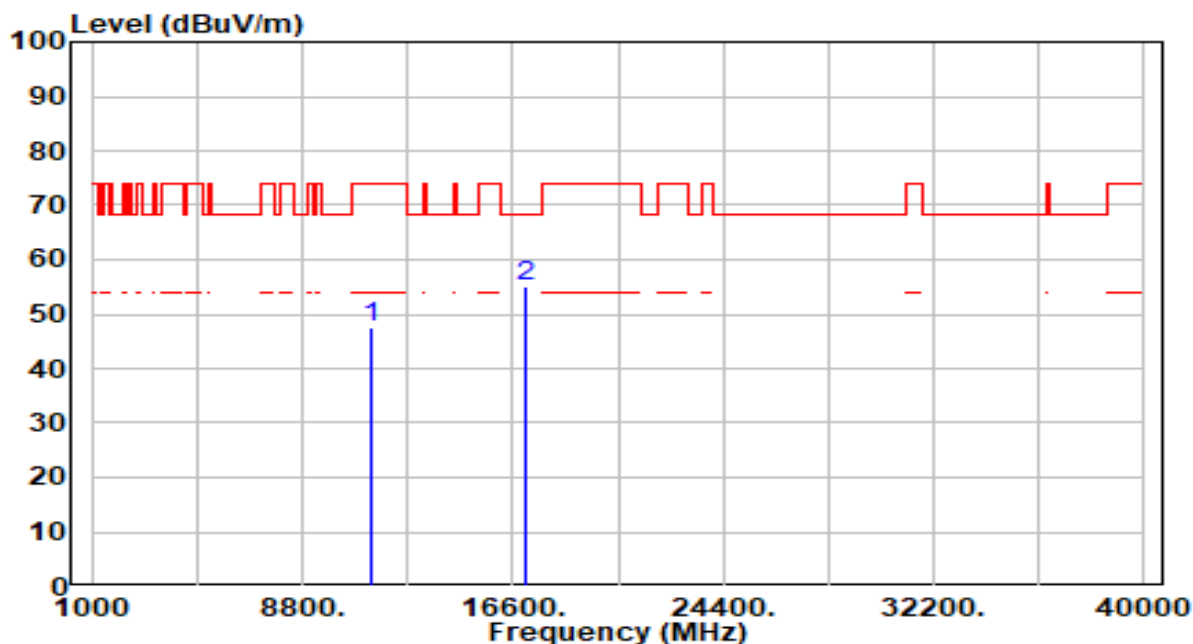


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11400.000	42.31	5.26	47.57	-26.43	74.00	100	316	Peak
2	* 17100.000	49.27	5.97	55.24	-12.96	68.20	100	328	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_52Tone_RU74_Band3_TX_CH 100 ANT 0+1	Test Voltage	By Notebook PC

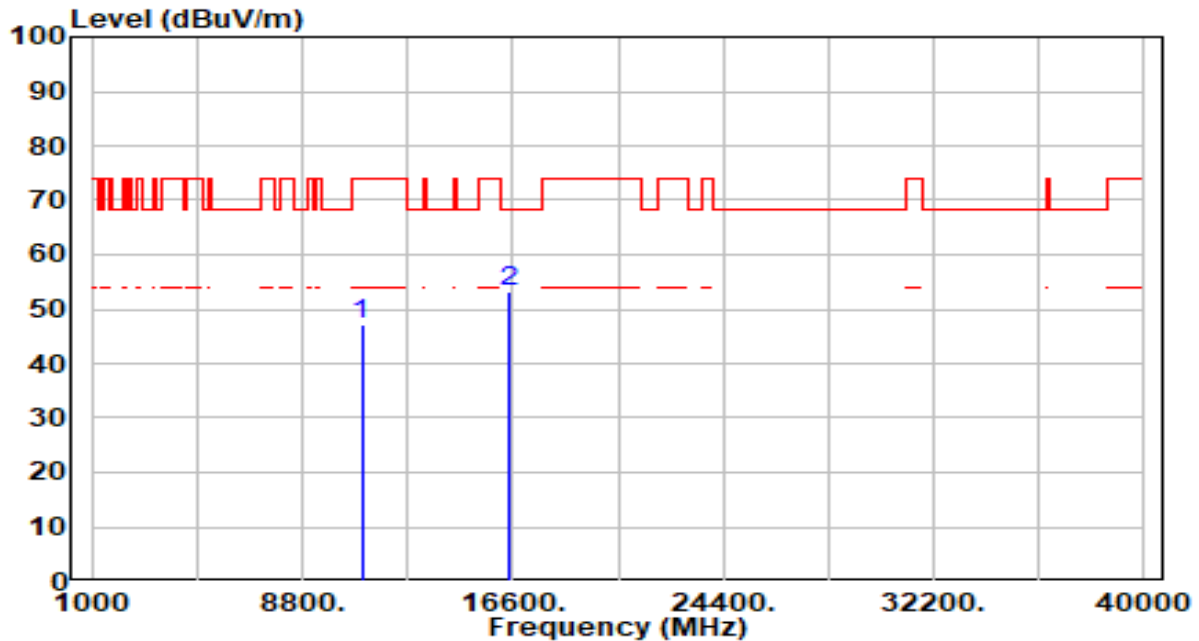


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11000.000	42.69	4.52	47.21	-26.79	74.00	100	331	Peak
2	*	16500.000	47.25	6.10	53.35	-14.85	68.20	100	51	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_52Tone_RU74_Band3_TX_CH 100 ANT 0+1	Test Voltage	By Notebook PC

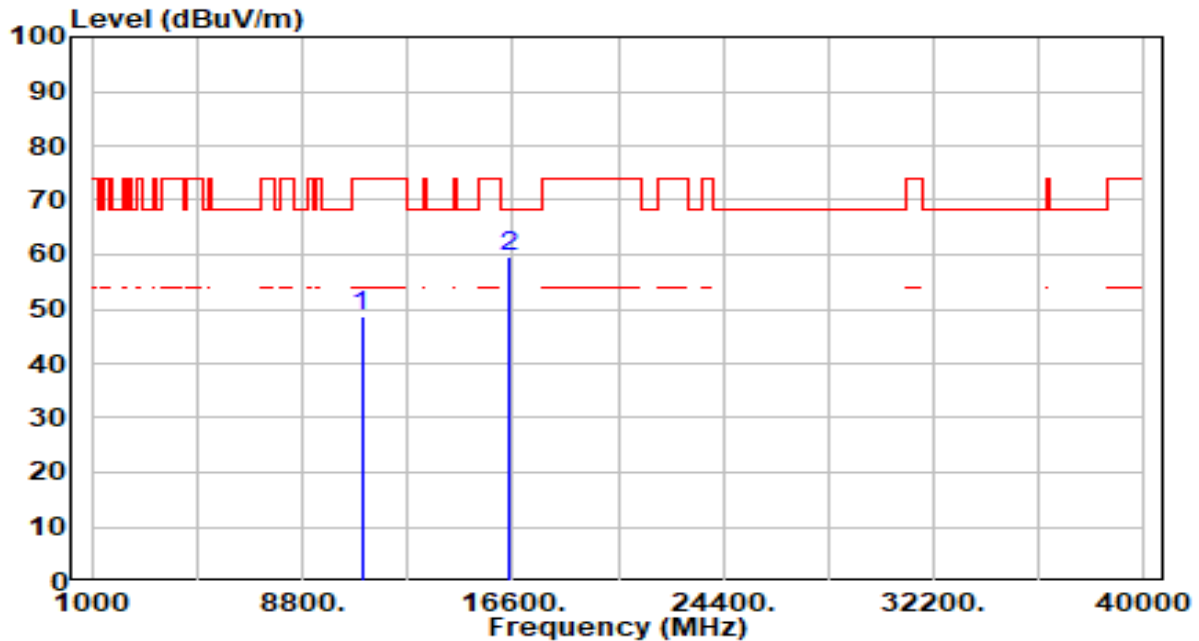


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11000.000	44.03	4.52	48.55	-25.45	74.00	100	305	Peak
2	*	16500.000	53.70	6.10	59.80	-8.40	68.20	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_52Tone_RU77_Band3_TX_CH 140 ANT 0+1	Test Voltage	By Notebook PC

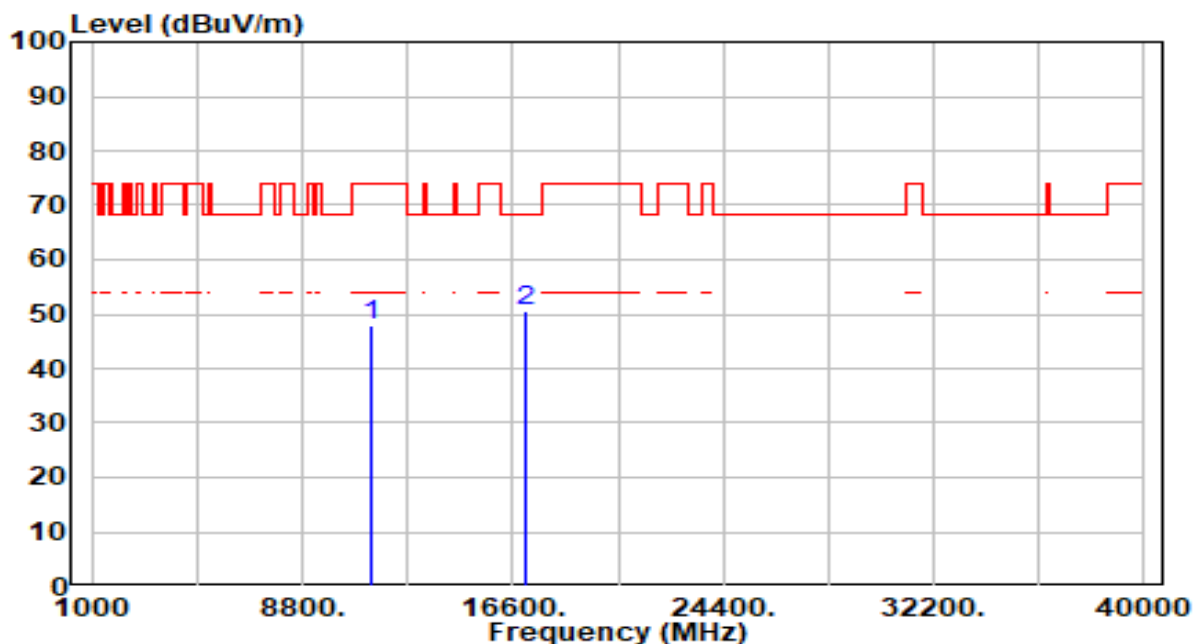


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11400.000	42.80	5.26	48.06	-25.94	74.00	100	300	Peak
2	*	17100.000	44.64	5.97	50.61	-17.59	68.20	100	14	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_52Tone_RU77_Band3_TX_CH 140 ANT 0+1	Test Voltage	By Notebook PC

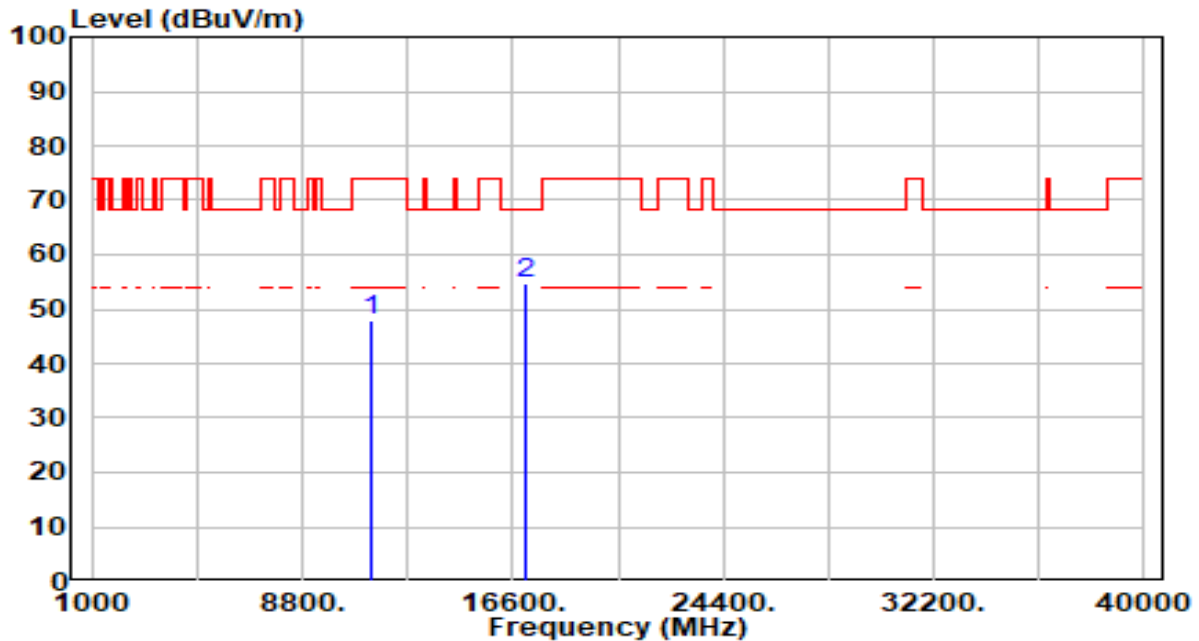


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11400.000	42.51	5.26	47.77	-26.23	74.00	100	87	Peak
2	*	17100.000	48.62	5.97	54.59	-13.61	68.20	100	355	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_106Tone_RU106_Band3_TX_CH 100 ANT 0+1	Test Voltage	By Notebook PC

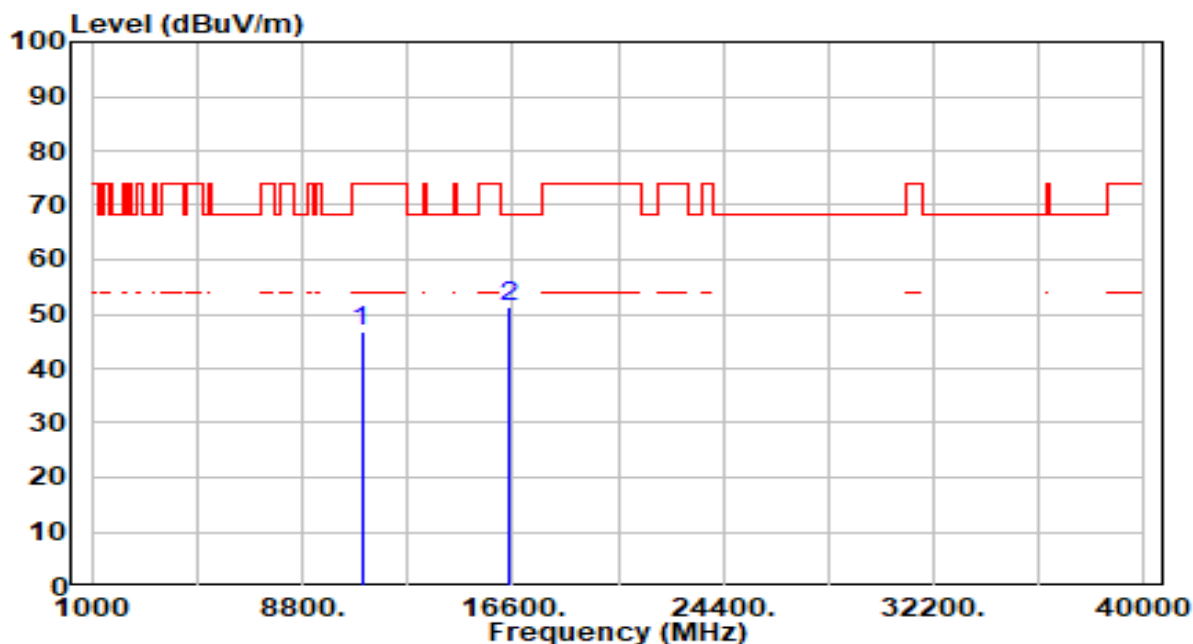


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11000.000	42.27	4.52	46.79	-27.21	74.00	100	323	Peak
2	*	16500.000	45.34	6.10	51.44	-16.76	68.20	100	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_106Tone_RU106_Band3_TX_CH 100 ANT 0+1	Test Voltage	By Notebook PC

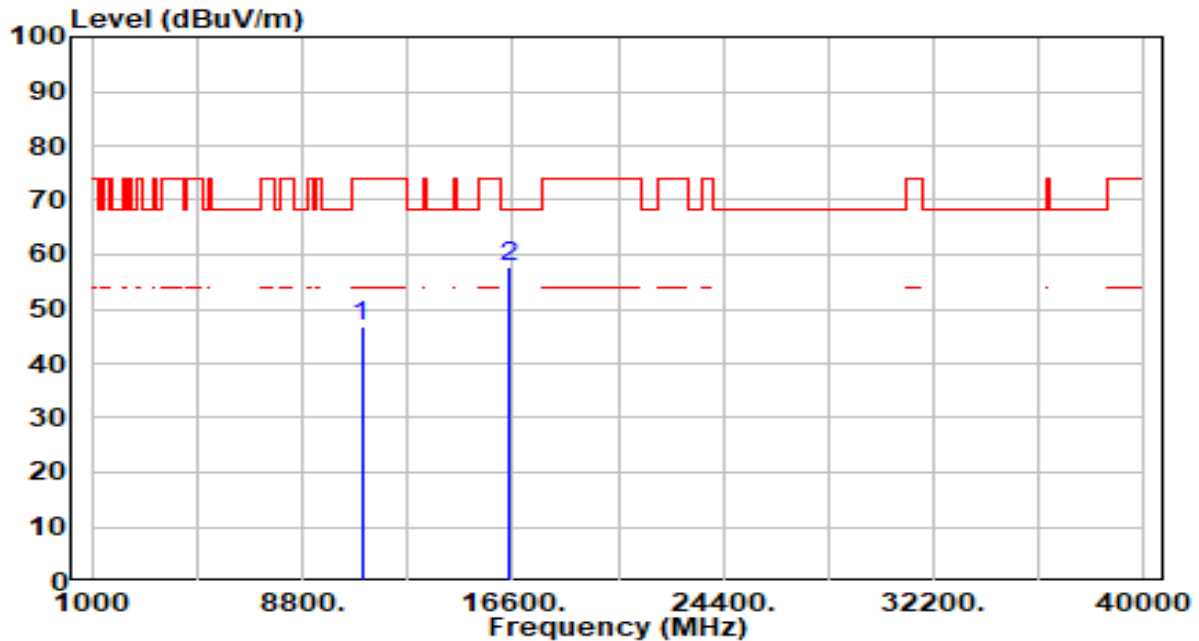


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11000.000	42.31	4.52	46.83	-27.17	74.00	100	116	Peak
2	* 16500.000	51.52	6.10	57.62	-10.58	68.20	100	337	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_106Tone_RU107_Band3_TX_CH 140 ANT 0+1	Test Voltage	By Notebook PC

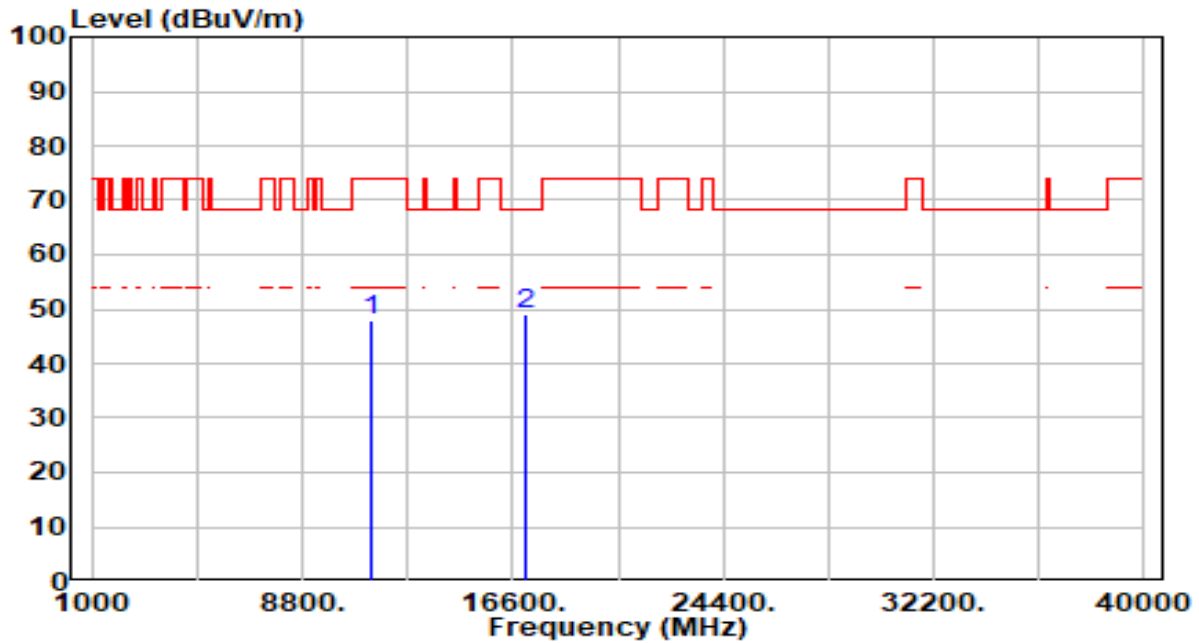


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11400.000	42.55	5.26	47.82	-26.18	74.00	100	312	Peak
2	*	17100.000	43.13	5.97	49.10	-19.10	68.20	100	14	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_106Tone_RU107_Band3_TX_CH 140 ANT 0+1	Test Voltage	By Notebook PC

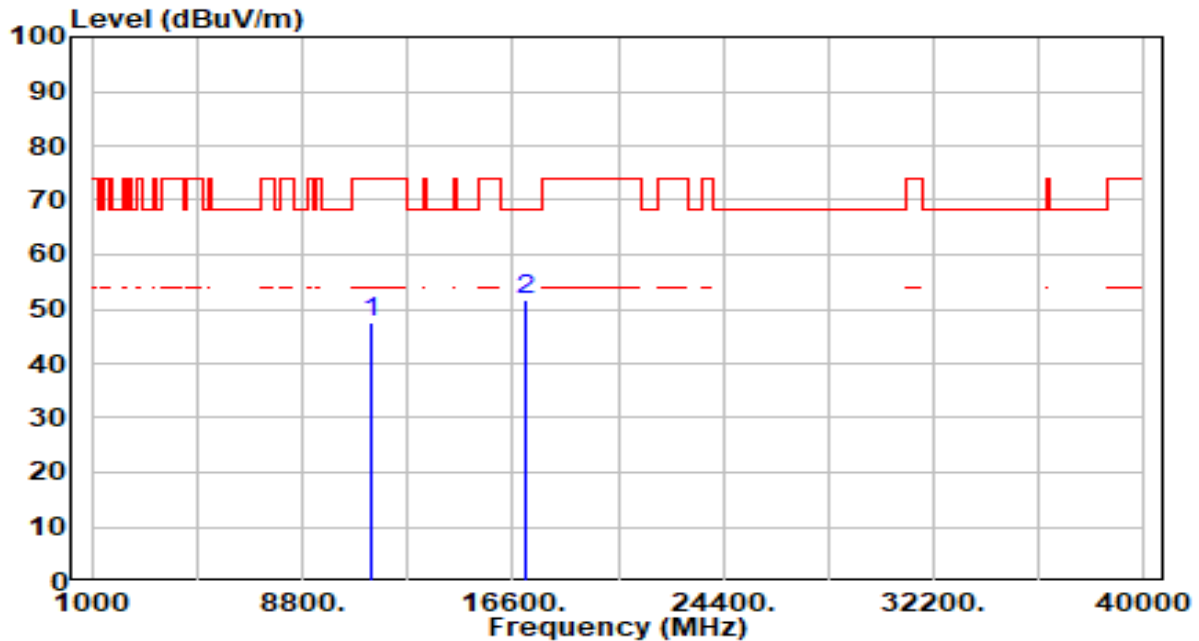


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11400.000	42.27	5.26	47.53	-26.47	74.00	100	274	Peak
2	*	17100.000	45.59	5.97	51.57	-16.63	68.20	100	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_242Tone_RU122_Band3_TX_CH 100 ANT 0+1	Test Voltage	By Notebook PC

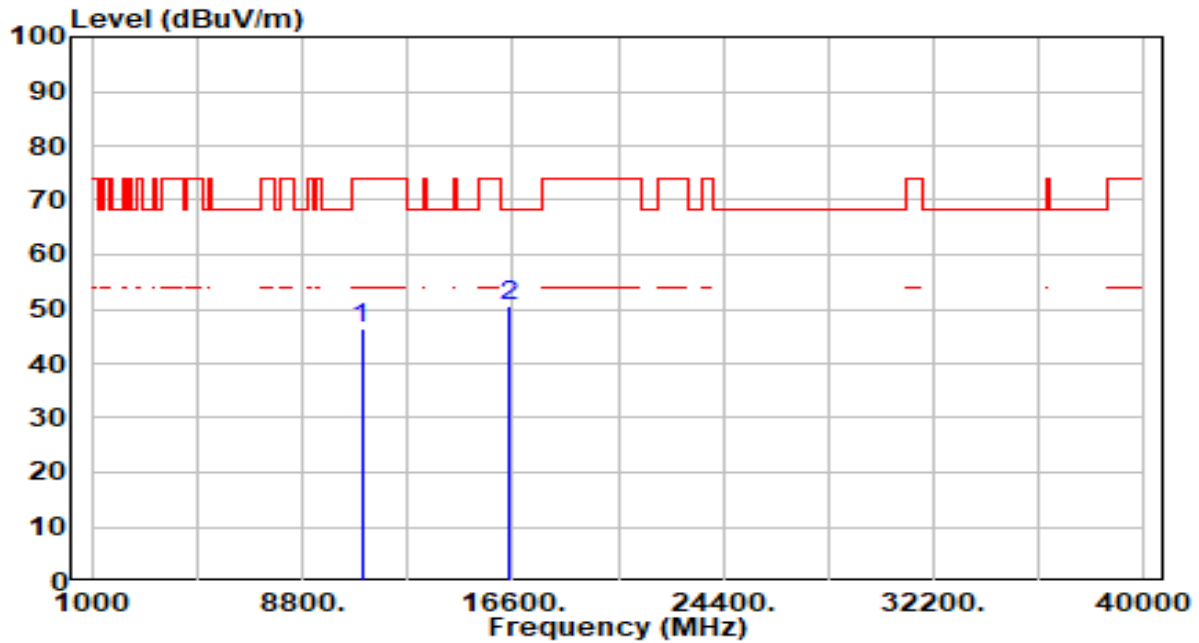


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11000.000	42.01	4.52	46.53	-27.47	74.00	100	82	Peak
2	*	16500.000	44.41	6.10	50.51	-17.69	68.20	100	292	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_242Tone_RU122_Band3_TX_CH 100 ANT 0+1	Test Voltage	By Notebook PC

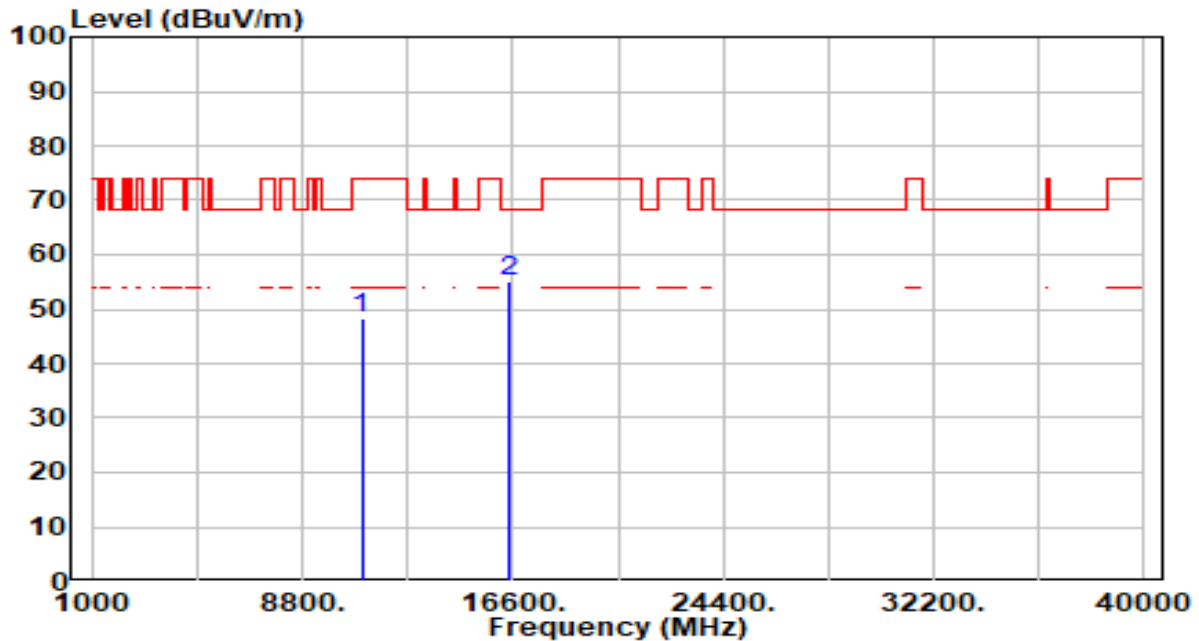


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11000.000	43.68	4.52	48.20	-25.80	74.00	100	232	Peak
2	*	16500.000	49.14	6.10	55.24	-12.96	68.20	100	338	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_242Tone_RU122_Band3_TX_CH 140 ANT 0+1	Test Voltage	By Notebook PC

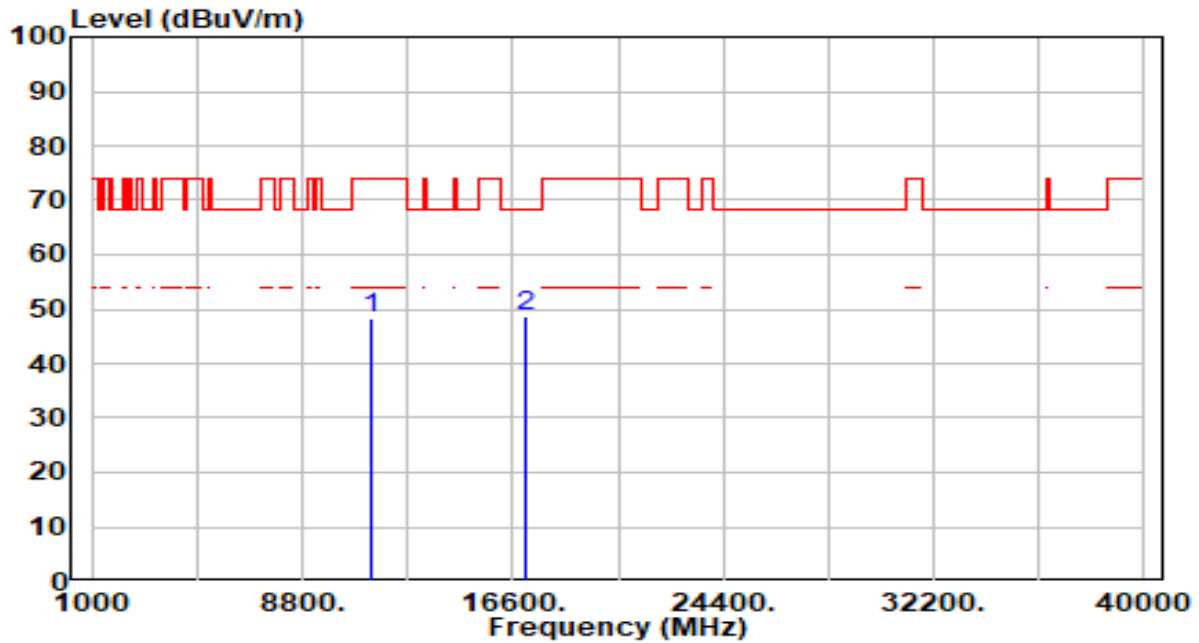


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11400.000	42.96	5.26	48.23	-25.77	74.00	100	0	Peak
2	*	17100.000	42.72	5.97	48.69	-19.51	68.20	100	244	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_242Tone_RU122_Band3_TX_CH 140 ANT 0+1	Test Voltage	By Notebook PC

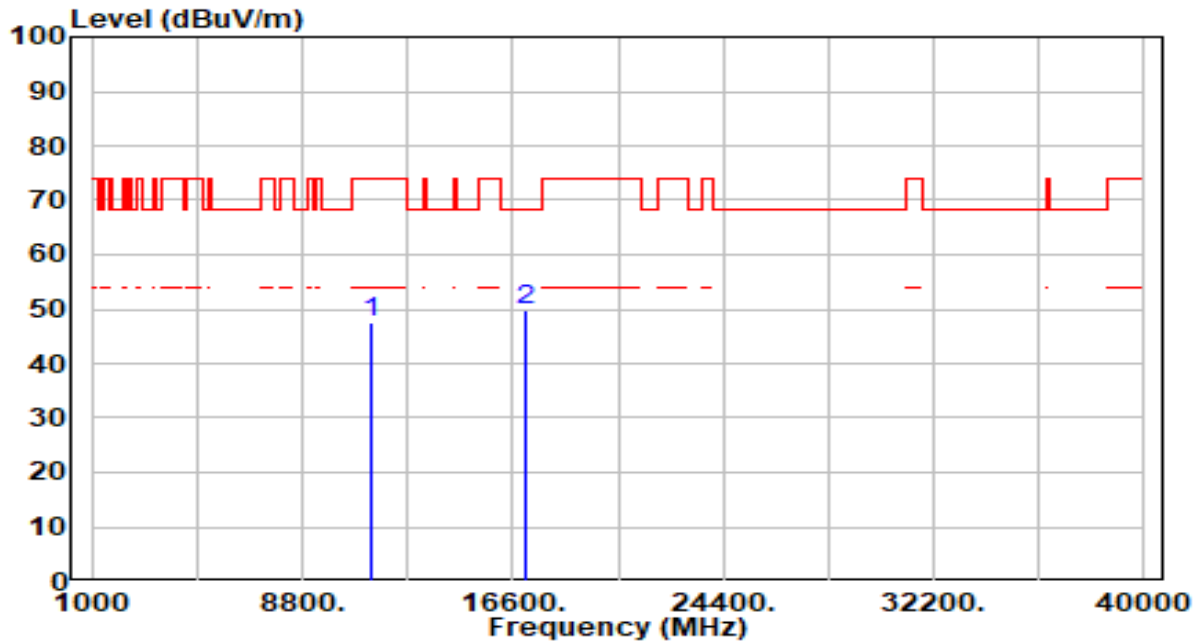


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11400.000	42.32	5.26	47.59	-26.41	74.00	100	38	Peak
2	*	17100.000	43.94	5.97	49.91	-18.29	68.20	100	331	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-20MHz_26Tone_RU0_Band4_TX_CH149 ANT 0+1	Test Voltage	By Notebook PC

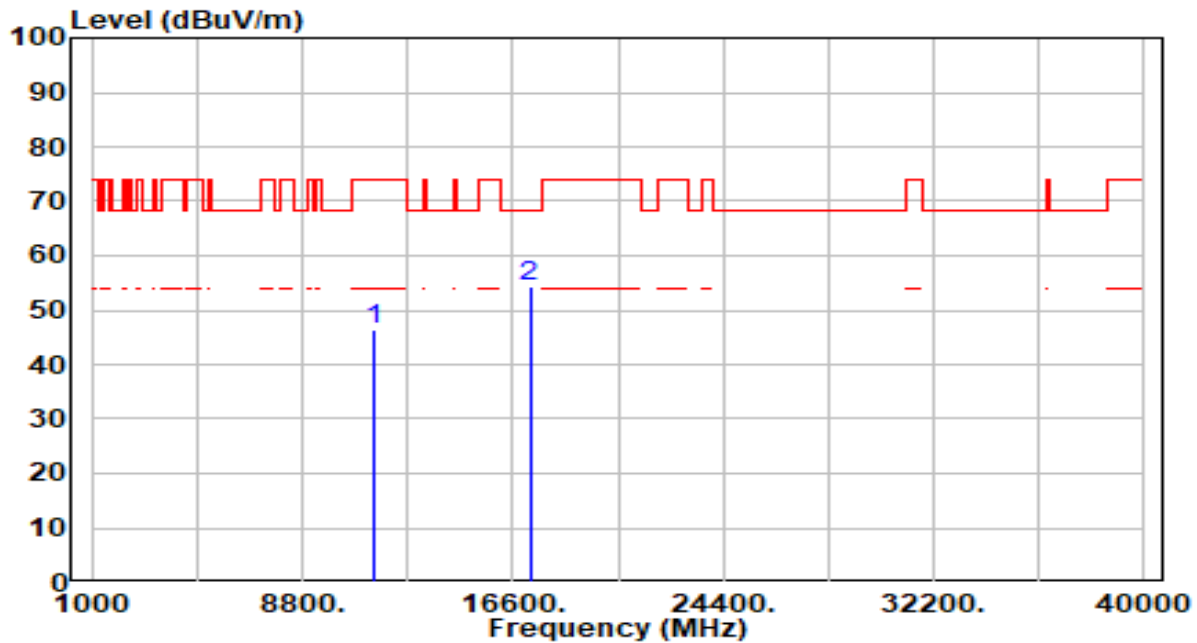


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11490.000	41.04	5.32	46.36	-27.64	74.00	100	36	Peak
2	*	17235.000	48.64	5.71	54.35	-13.85	68.20	100	287	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-20MHz_26Tone_RU0_Band4_TX_CH149 ANT 0+1	Test Voltage	By Notebook PC

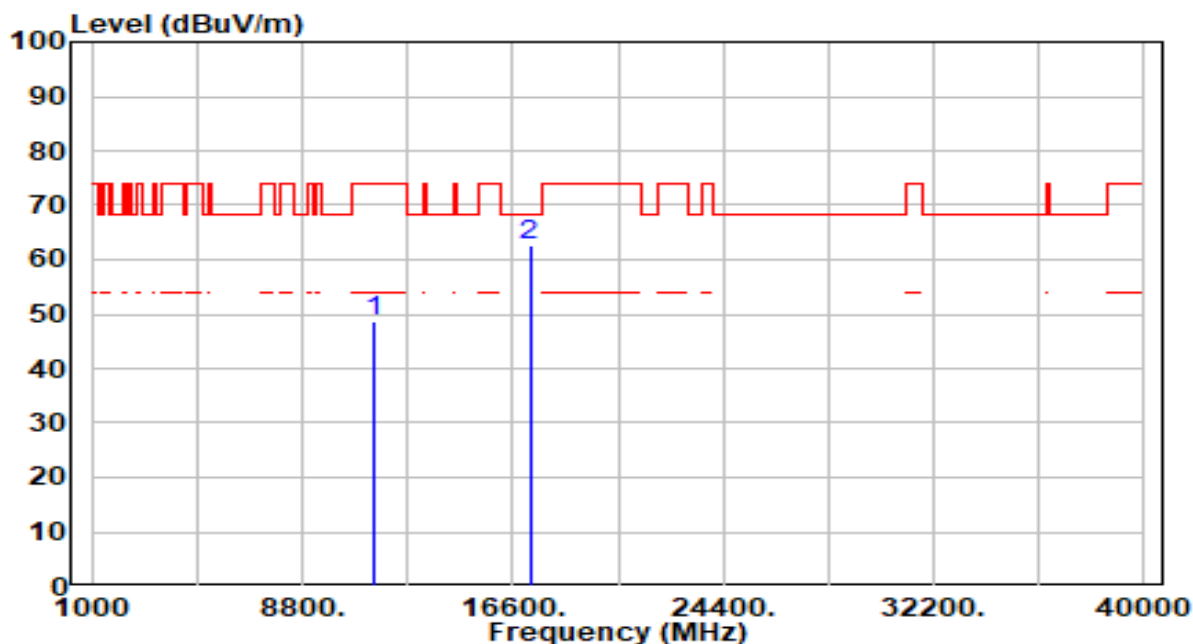


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11490.000	43.25	5.32	48.57	-25.43	74.00	100	339	Peak
2	* 17235.000	57.01	5.71	62.72	-5.48	68.20	100	339	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_26Tone_RU8_Band4_TX_CH 165 ANT 0+1	Test Voltage	By Notebook PC

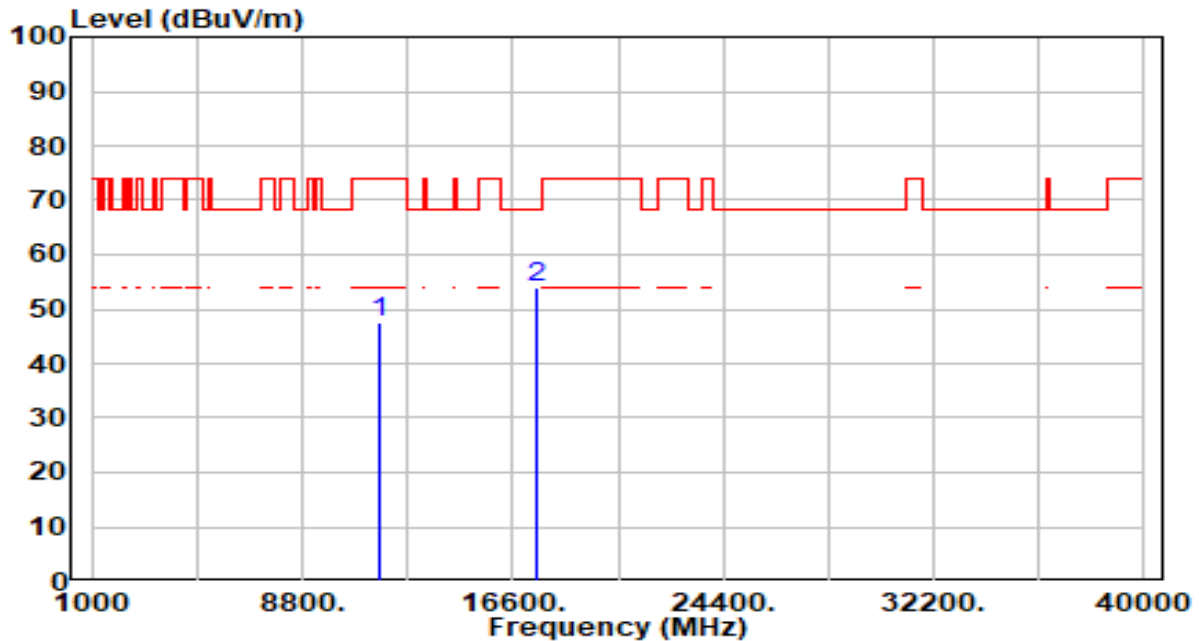


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11650.000	42.23	5.36	47.60	-26.40	74.00	100	360	Peak
2	*	17475.000	48.70	5.29	54.00	-14.20	68.20	100	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_26Tone_RU8_Band4_TX_CH 165 ANT 0+1	Test Voltage	By Notebook PC

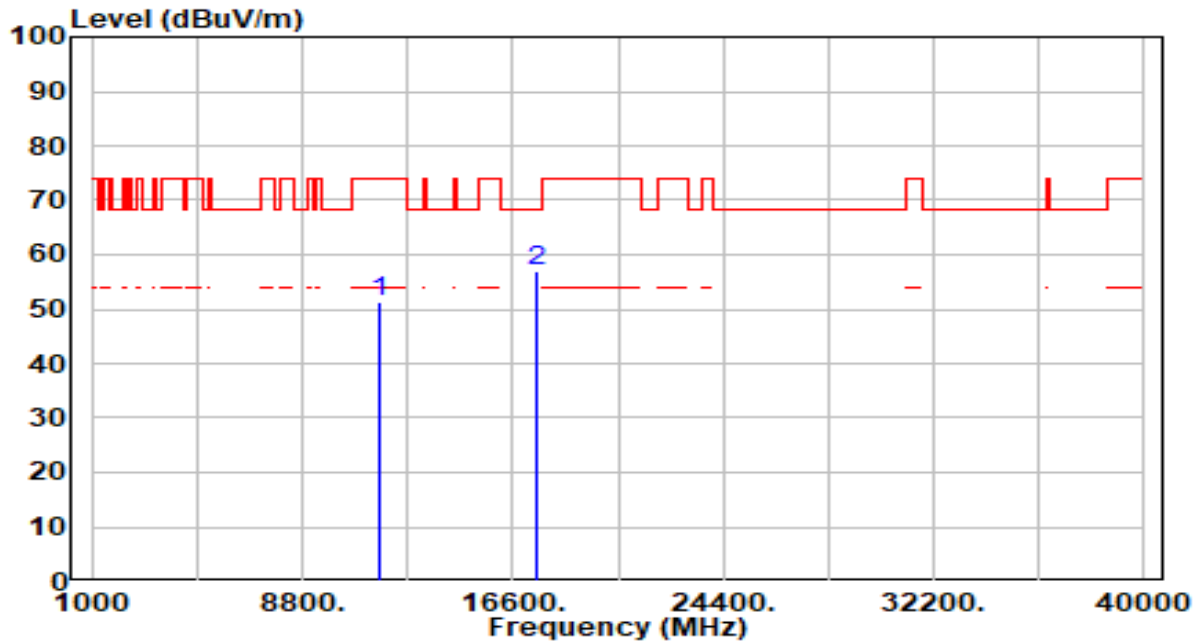


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11650.000	44.80	5.36	50.16	-23.84	74.00	100	39	Peak
2	*	17475.000	51.51	5.29	56.80	-11.40	68.20	100	351	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_52Tone_RU74_Band4_TX_CH 149 ANT 0+1	Test Voltage	By Notebook PC

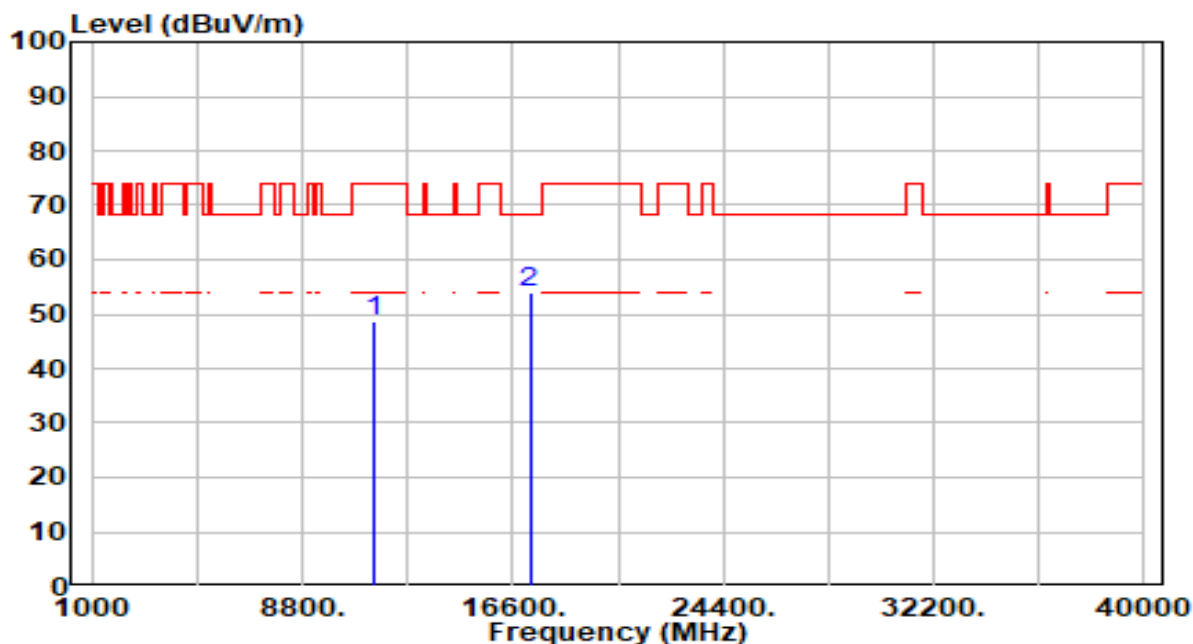


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11490.000	43.27	5.32	48.59	-25.41	74.00	100	37	Peak
2	* 17235.000	48.41	5.71	54.13	-14.07	68.20	100	89	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_52Tone_RU74_Band4_TX_CH 149 ANT 0+1	Test Voltage	By Notebook PC

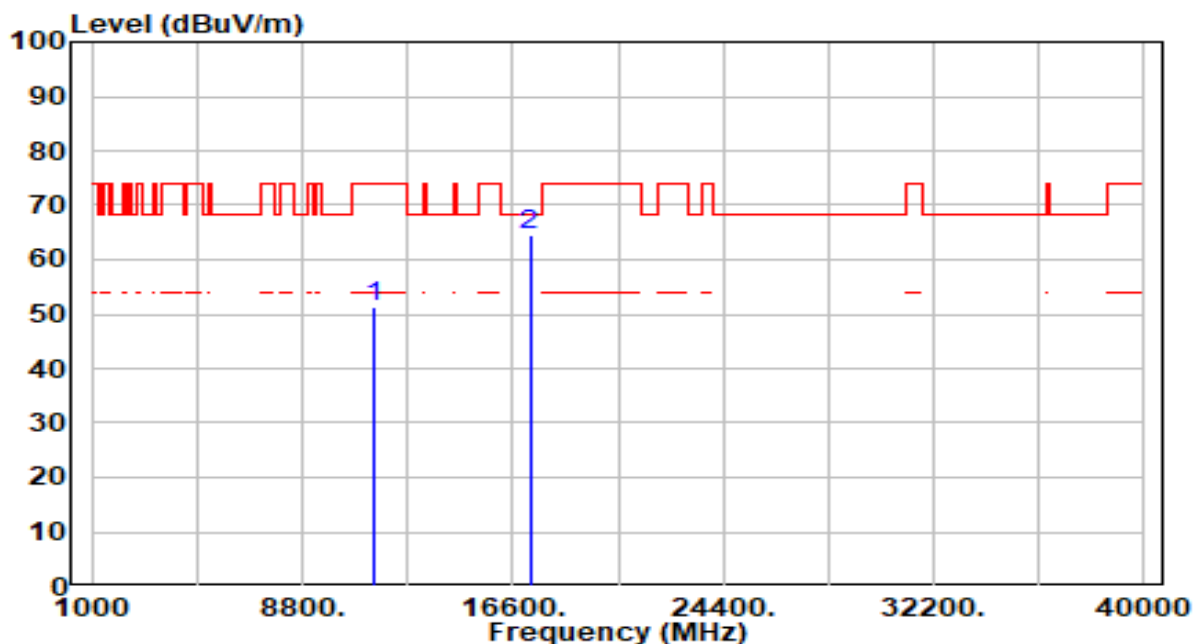


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11490.000	44.83	5.32	50.15	-23.85	74.00	100	45	Peak
2	* 17235.000	58.85	5.71	64.56	-3.64	68.20	100	345	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_52Tone_RU77_Band4_TX_CH 165 ANT 0+1	Test Voltage	By Notebook PC

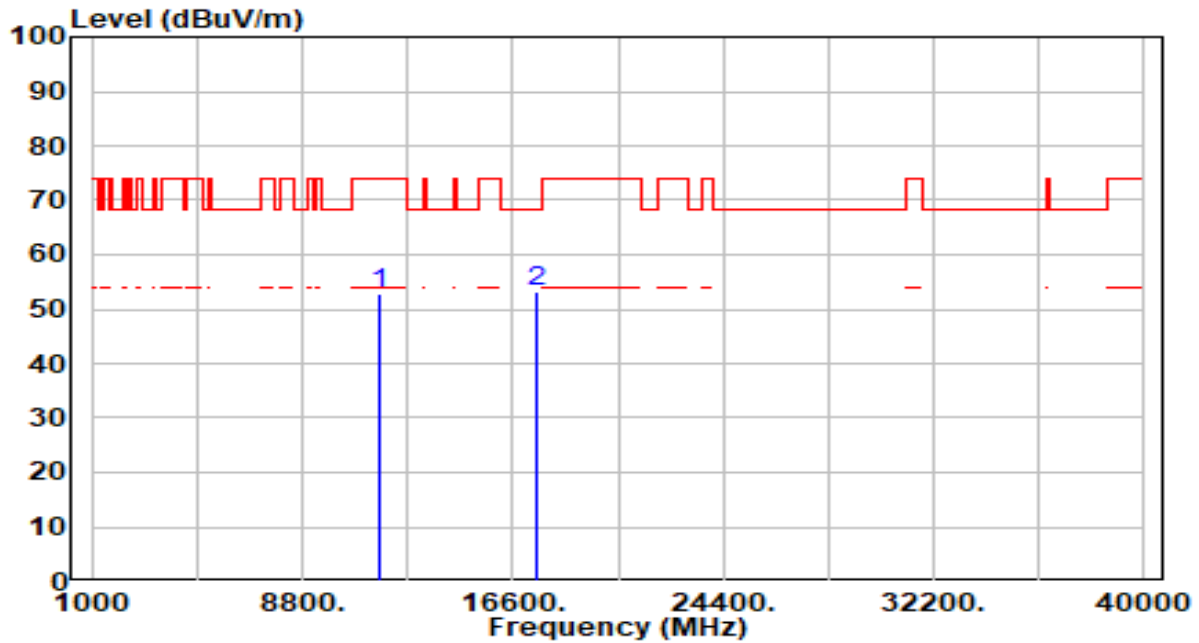


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11650.000	45.62	5.36	50.98	-23.02	74.00	100	30	Peak
2	*	17475.000	48.05	5.29	53.34	-14.86	68.20	100	5	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_52Tone_RU77_Band4_TX_CH 165 ANT 0+1	Test Voltage	By Notebook PC

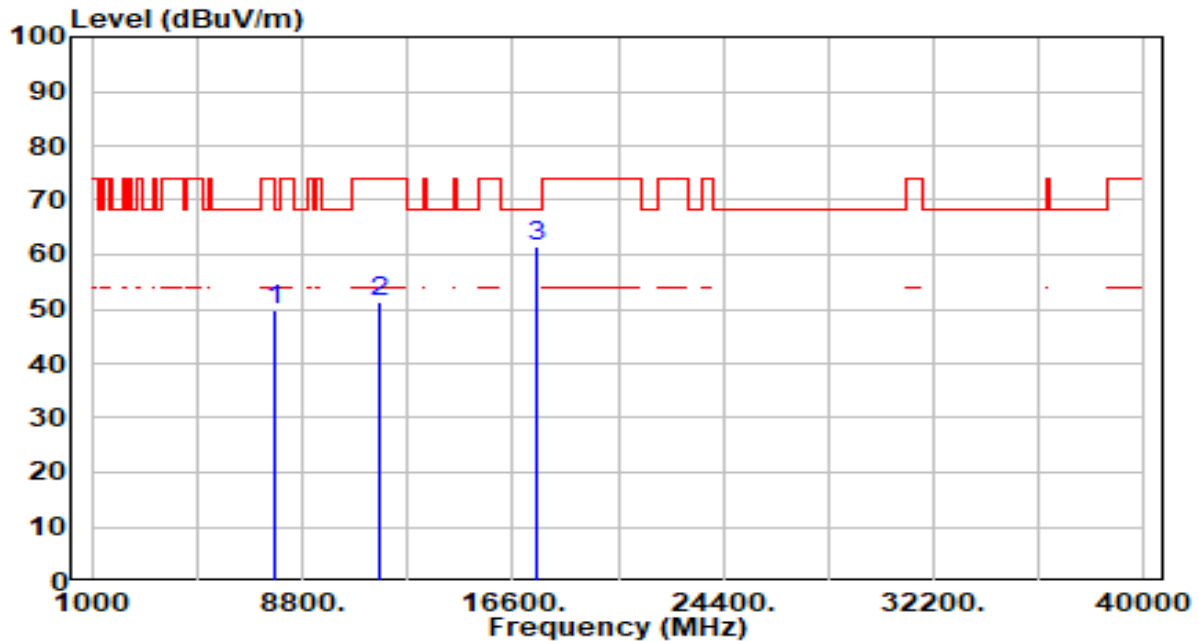


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7765.353	44.19	5.46	49.65	-18.55	68.20	100	231	Peak
2	11650.000	45.04	5.36	50.40	-23.60	74.00	100	31	Peak
3	* 17475.000	56.19	5.29	61.49	-6.71	68.20	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_106Tone_RU106_Band4_TX_CH 149 ANT 0+1	Test Voltage	By Notebook PC

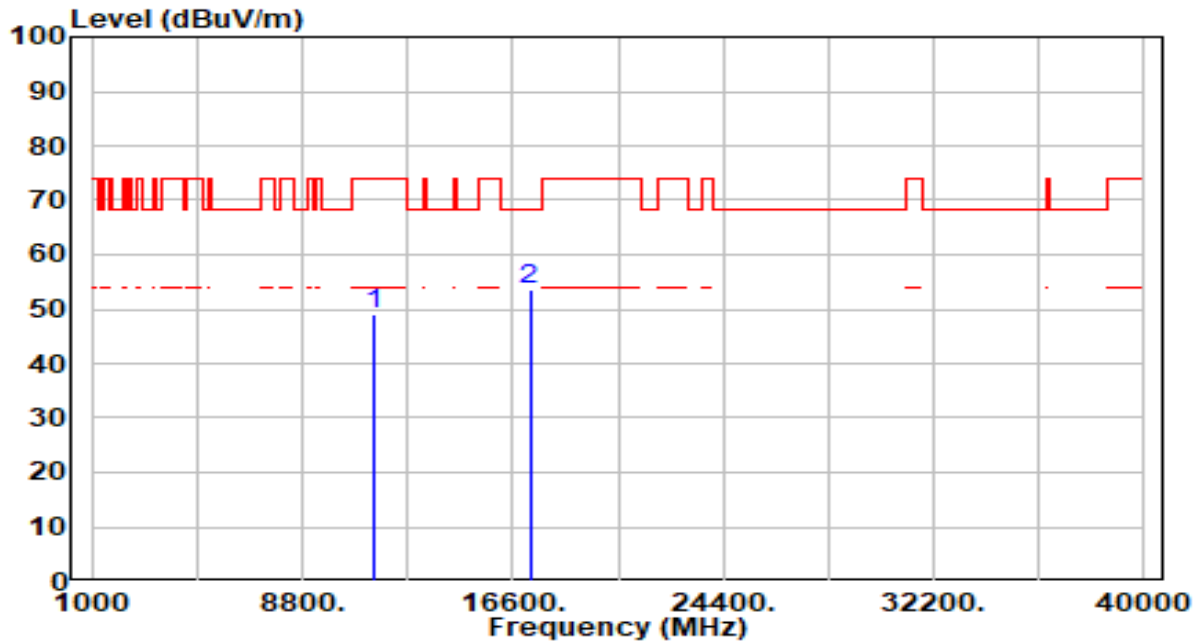


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11490.000	43.77	5.32	49.09	-24.91	74.00	100	290	Peak
2	* 17235.000	47.84	5.71	53.55	-14.65	68.20	100	354	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_106Tone_RU106_Band4_TX_CH 149 ANT 0+1	Test Voltage	By Notebook PC

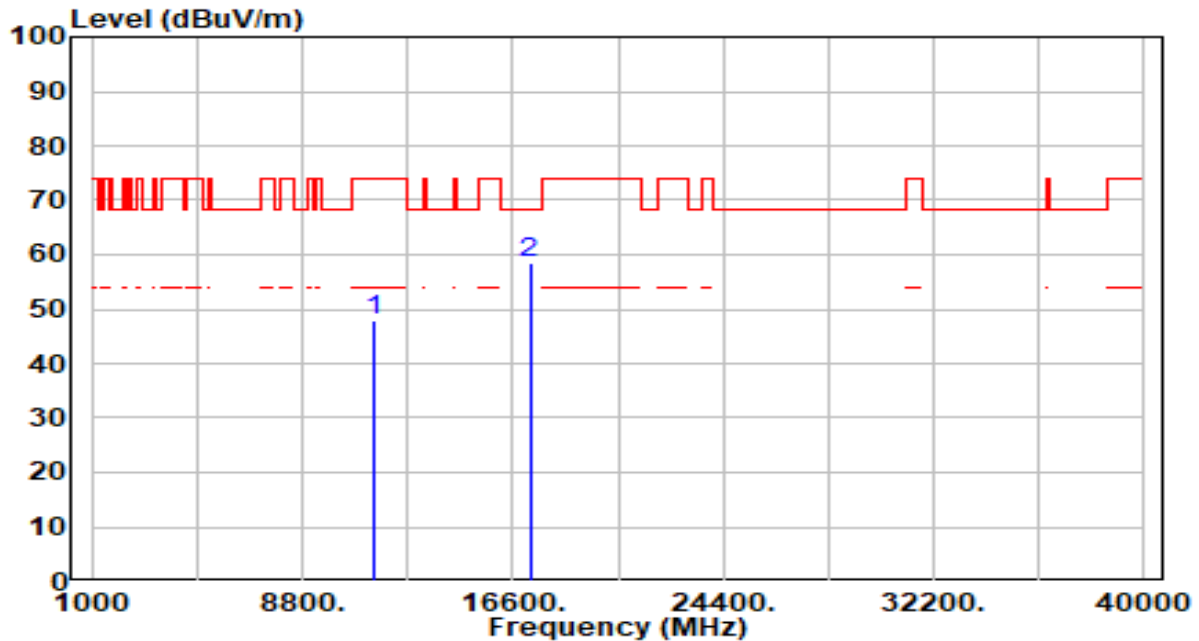


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11490.000	42.69	5.32	48.00	-26.00	74.00	100	230	Peak
2	*	17235.000	52.77	5.71	58.48	-9.72	68.20	100	322	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_106Tone_RU107_Band4_TX_CH 165 ANT 0+1	Test Voltage	By Notebook PC

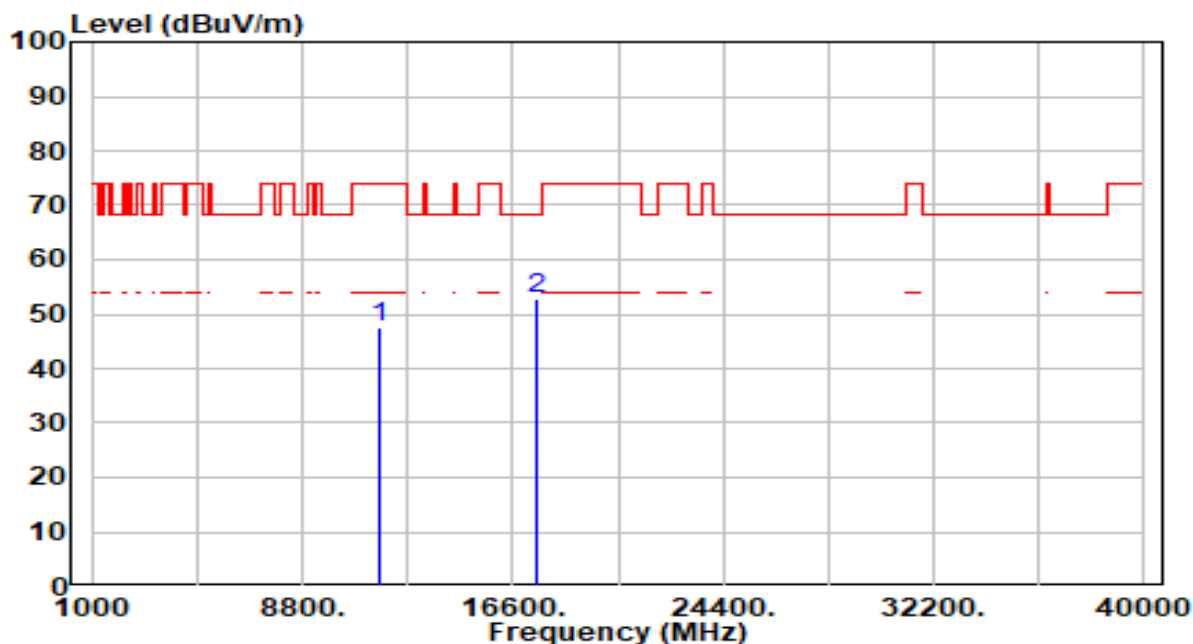


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11650.000	42.16	5.36	47.52	-26.48	74.00	100	309	Peak
2	*	17475.000	47.45	5.29	52.74	-15.46	68.20	100	15	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_106Tone_RU107_Band4_TX_CH 165 ANT 0+1	Test Voltage	By Notebook PC

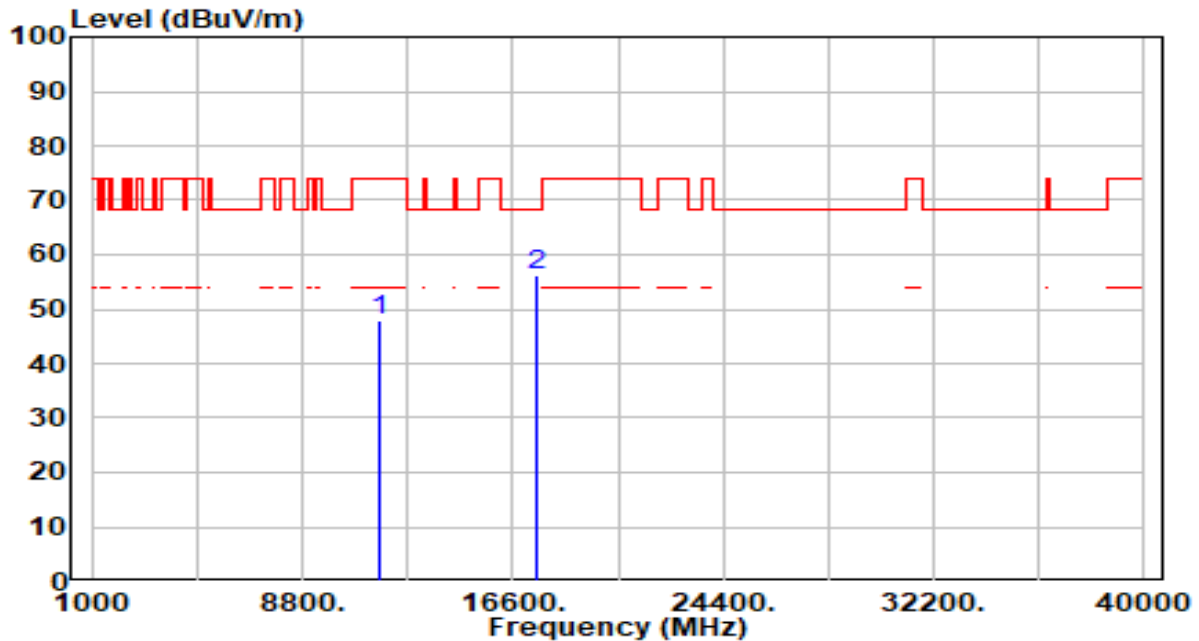


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11650.000	42.58	5.36	47.95	-26.05	74.00	100	360	Peak
2	* 17475.000	50.99	5.29	56.28	-11.92	68.20	100	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_242Tone_RU122_Band4_TX_CH 149 ANT 0+1	Test Voltage	By Notebook PC

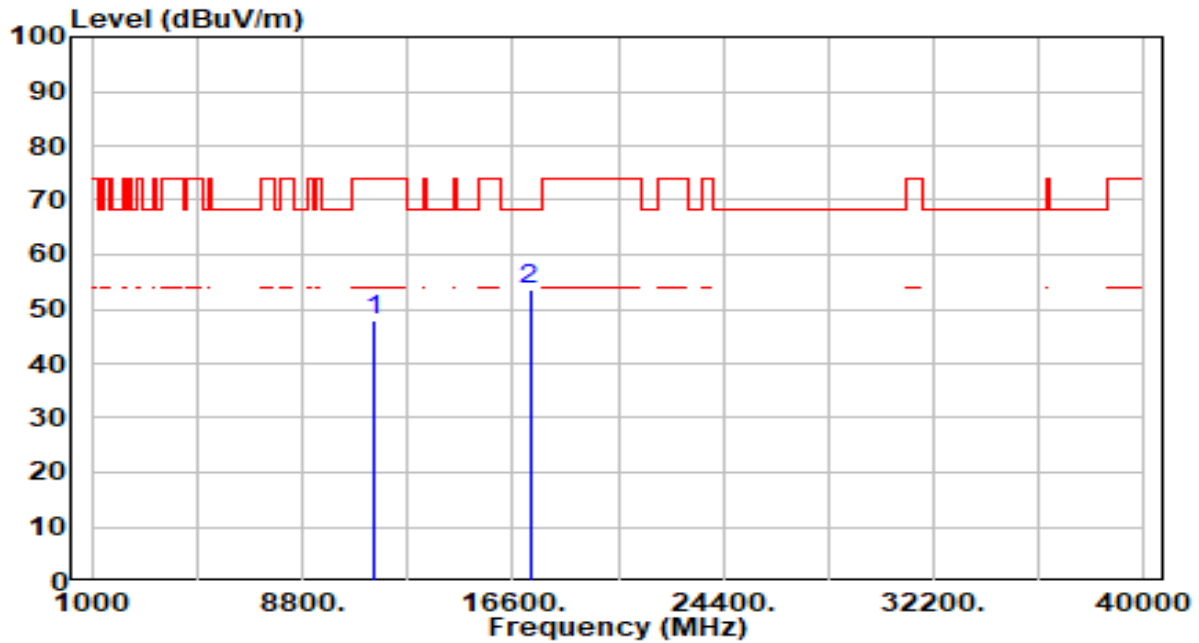


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11490.000	42.60	5.32	47.92	-26.08	74.00	100	146	Peak
2	* 17235.000	47.88	5.71	53.59	-14.61	68.20	100	292	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_242Tone_RU122_Band4_TX_CH 149 ANT 0+1	Test Voltage	By Notebook PC

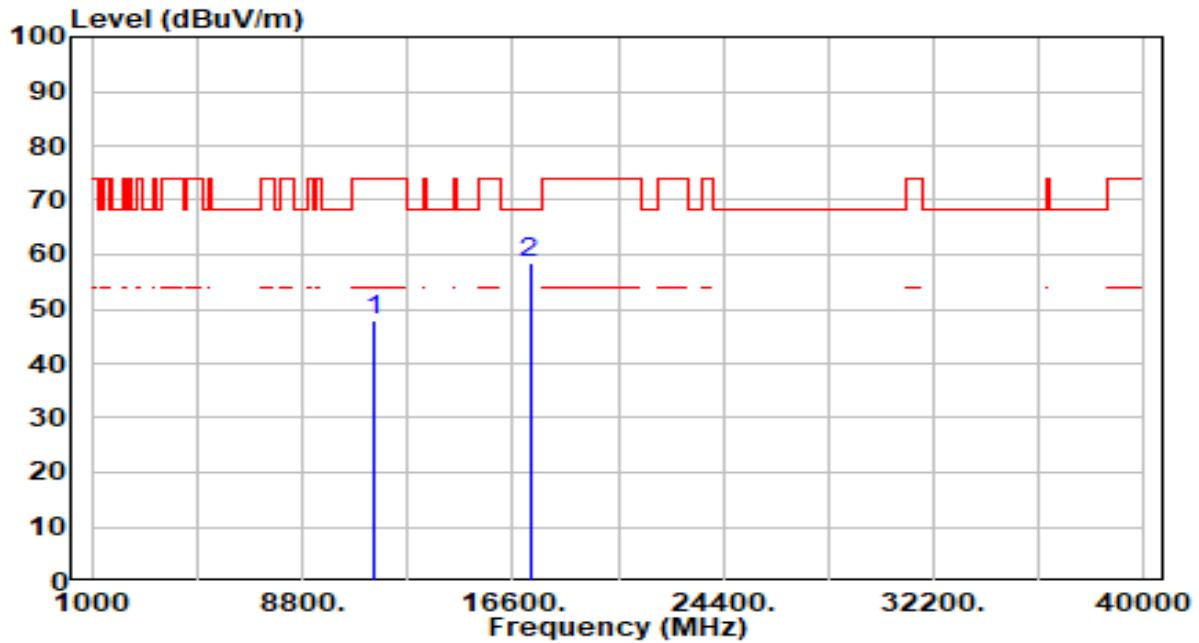


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11490.000	42.69	5.32	48.00	-26.00	74.00	100	272	Peak
2	*	17235.000	52.89	5.71	58.60	-9.60	68.20	100	342	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_242Tone_RU122_Band4_TX_CH 165 ANT 0+1	Test Voltage	By Notebook PC

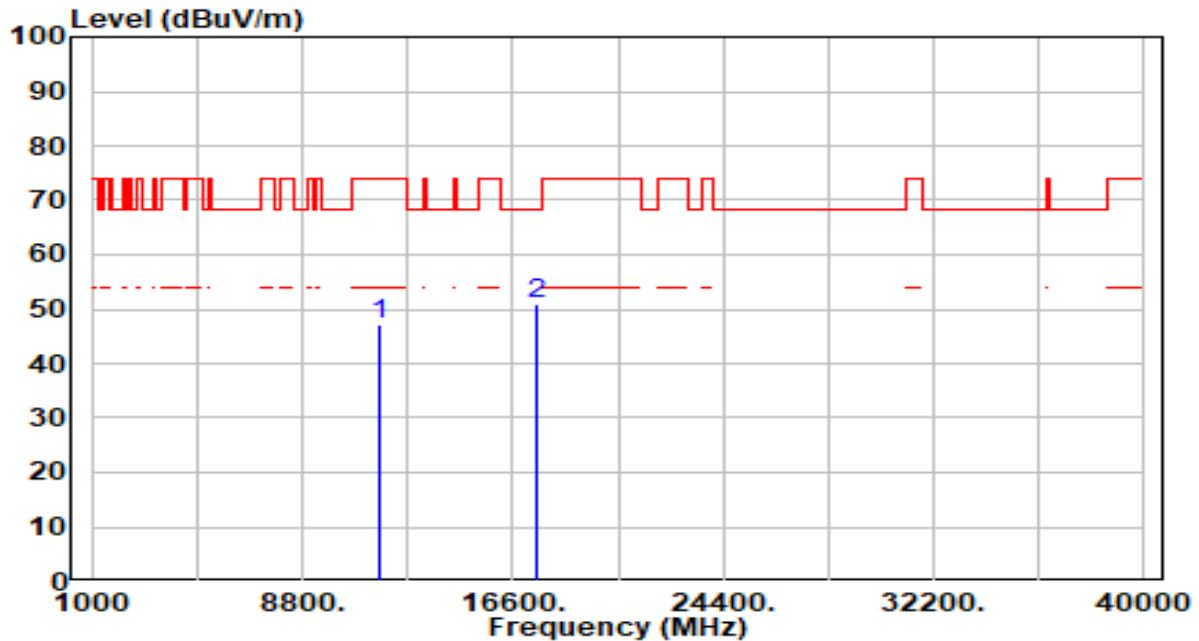

No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11650.000	41.90	5.36	47.26	-26.74	74.00	100	34	Peak
2	* 17475.000	45.52	5.29	50.81	-17.39	68.20	100	28	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.