



802.11ax-HE20 Power Spectral Density - Ant 1


26 Tone_RU0_CH169 (5845MHz)

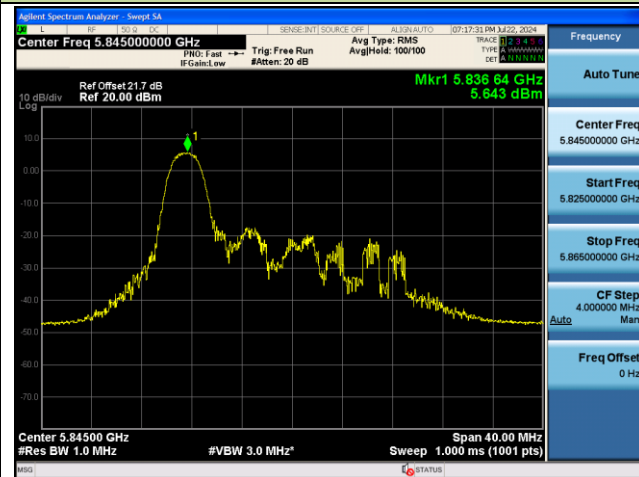


26 Tone_RU8_CH177 (5885MHz)

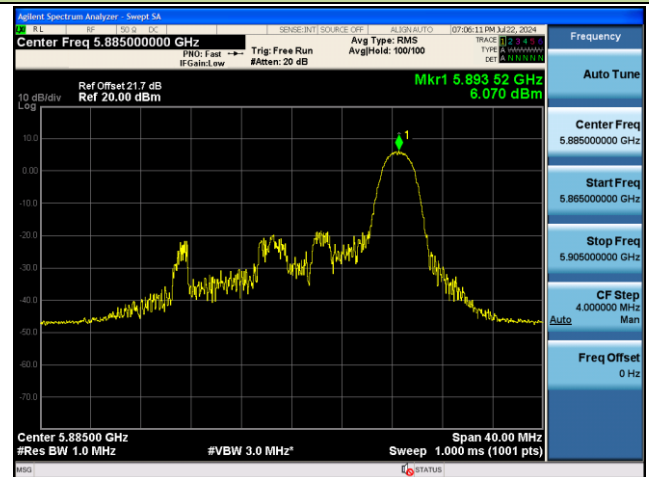


52 Tone_RU74_CH169 (5845MHz)

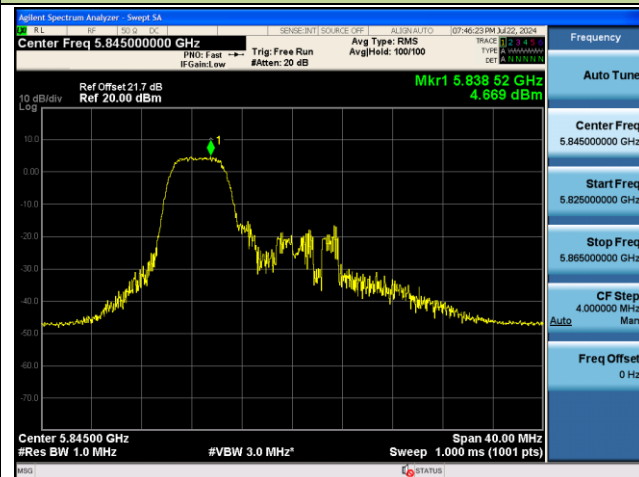


52 Tone_RU77_CH177 (5885MHz)

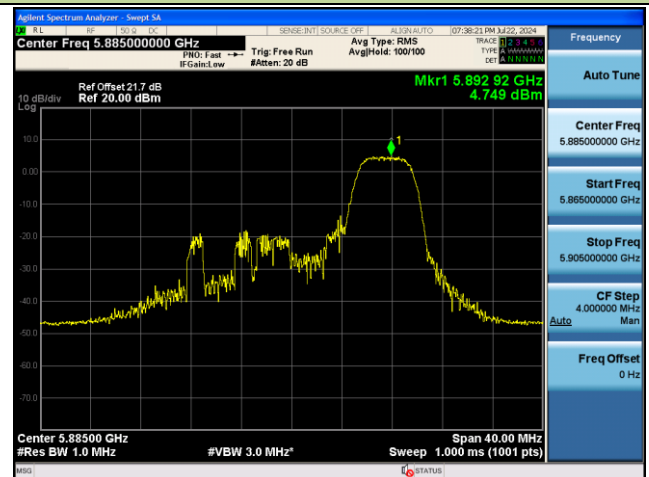


106 Tone_RU106_CH169 (5845MHz)

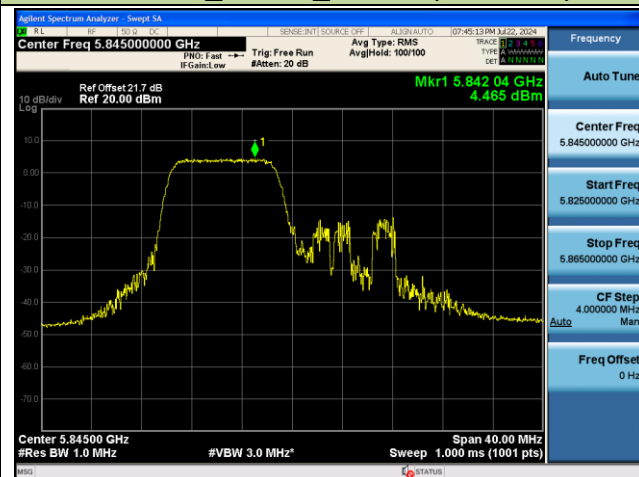


106 Tone_RU107_CH177 (5885MHz)

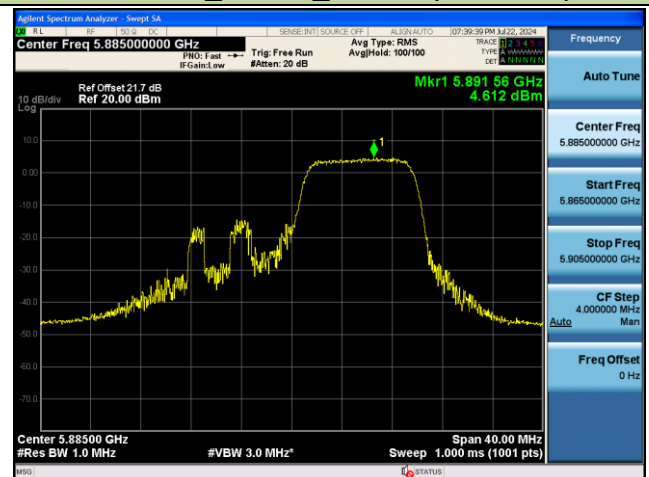

242 Tone_RU122_CH169 (5845MHz)

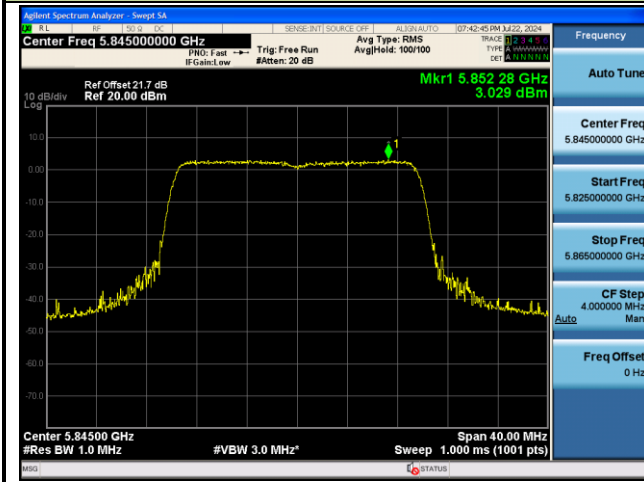

242 Tone_RU122_CH177 (5885MHz)

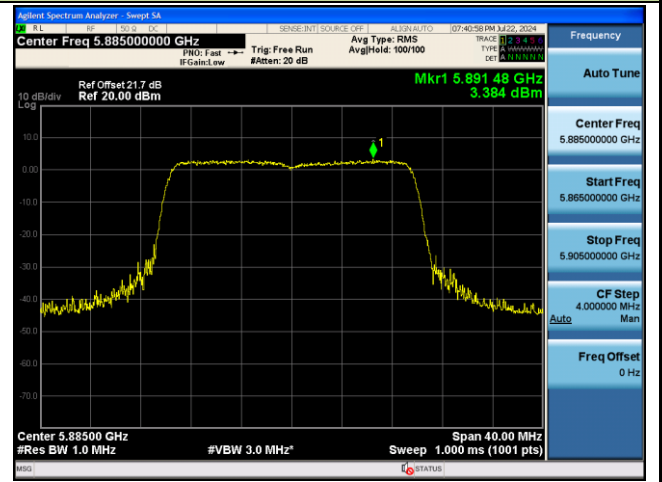

7.6. Frequency Stability Measurement

7.6.1. Test Limit

Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

7.6.2. Test Procedure

Frequency Stability Under Temperature Variations:


The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to highest. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C decreased per stage until the lowest temperature reached.

Frequency Stability Under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.

7.6.3. Test Procedure

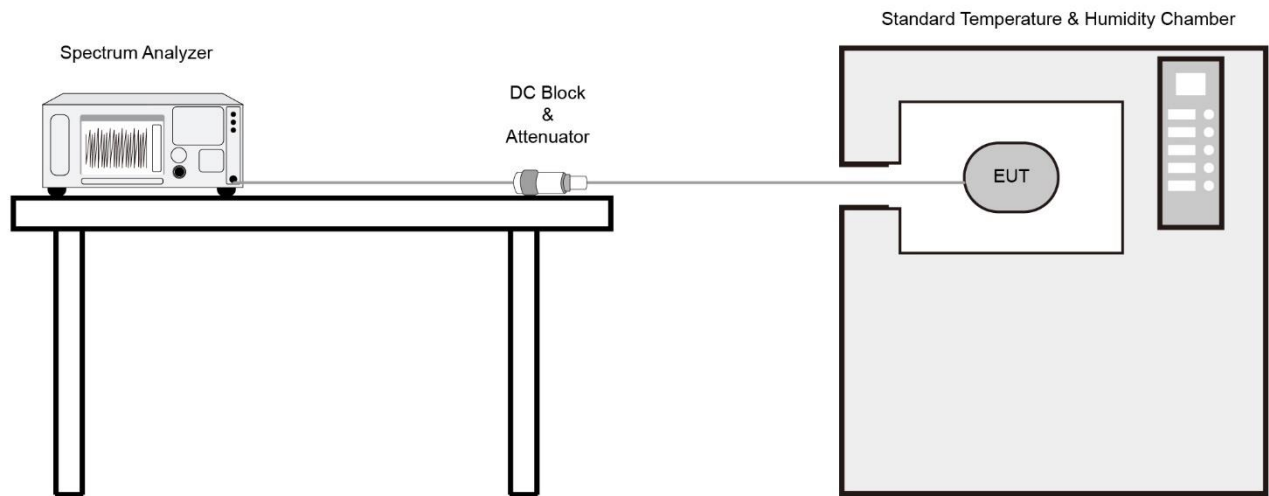

7.6.4. Test Result

Test Site	SR6	Test Engineer	Wen
Test Date	2024/7/21		
Test Mode	5885MHz (Carrier Mode)		

Voltage (%)	Power (DC)	Temp (°C)	Frequency Tolerance (ppm)			
			0 minutes	2 minutes	5 minutes	10 minutes
100	DC 3.8V	- 30	-4.88	-4.93	-4.96	-4.98
		- 20	-5.00	-5.01	-5.05	-5.05
		- 10	-5.05	-5.12	-5.15	-5.13
		0	-5.13	-5.13	-5.15	-5.15
		+ 10	-5.15	-5.17	-5.17	-5.17
		+ 20	-5.17	-5.17	-5.18	-5.20
		+ 30	-5.18	-5.20	-5.20	-5.18
		+ 40	-5.22	-5.22	-5.24	-5.24
		+ 50	-5.24	-5.24	-5.24	-5.25
115	DC 4.4V	+ 20	-5.25	-5.25	-5.25	-5.27
85	DC 3.2V	+ 20	-5.27	-5.27	-5.27	-5.27

Note: Frequency Tolerance (ppm) = {[Measured Frequency (Hz) - Declared Frequency (Hz)] / Declared Frequency (Hz)} *10⁶.

7.7. Radiated Spurious Emission Measurement

7.7.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.7.2. Test Procedure Used

KDB 789033 D02v02r01- Section G

7.7.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
>1000 MHz	1 MHz

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.
If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

7.7.4. Test Setup

Below 1GHz Test Setup:

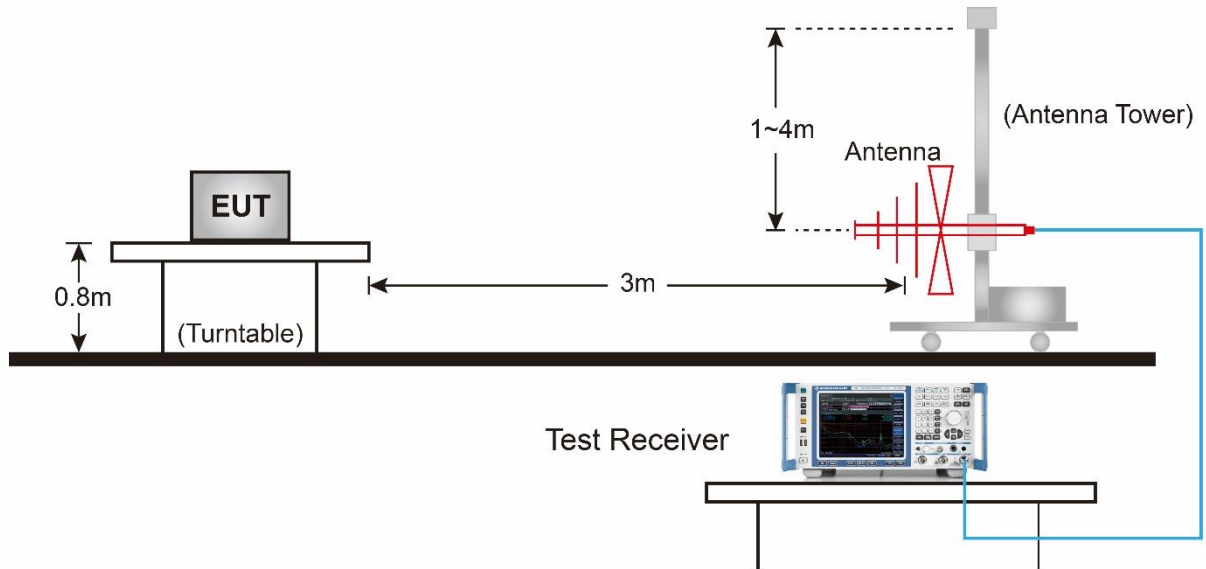


Above 1GHz Test Setup:

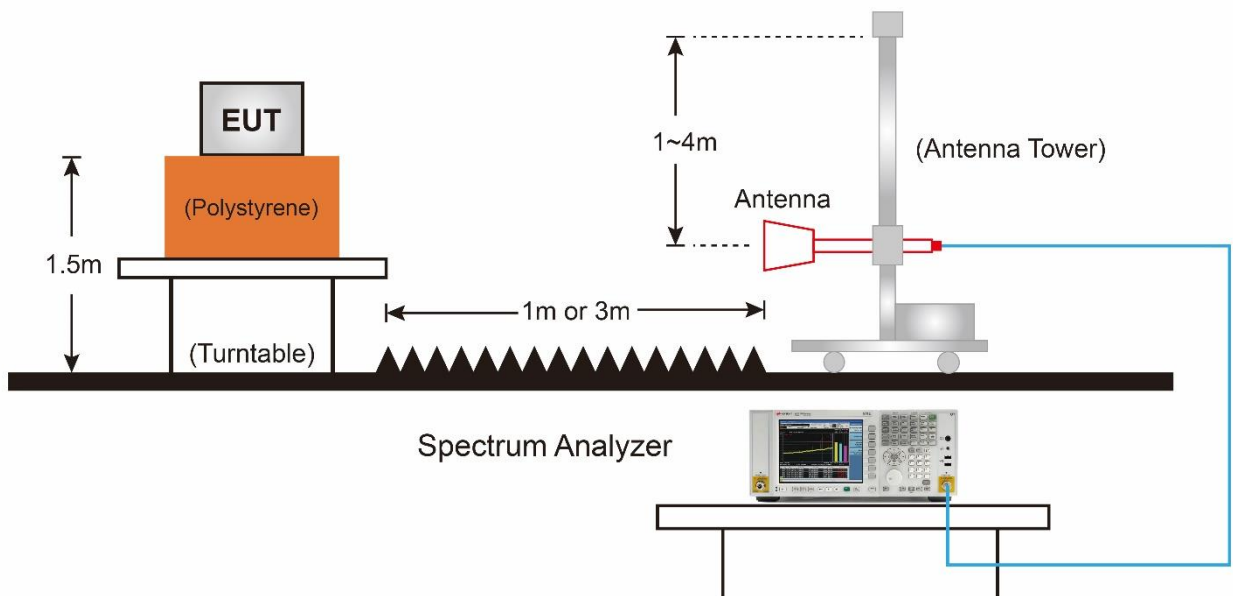

7.7.5.Test Result

EUT	Mobile Computer	Date of Test	2024-07-21
Factor	VULB 9162	Temp. / Humidity	20°C /52%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac-20MHz_Band4_TX_CH 173 ANT 0+1	Test Voltage	By Notebook PC

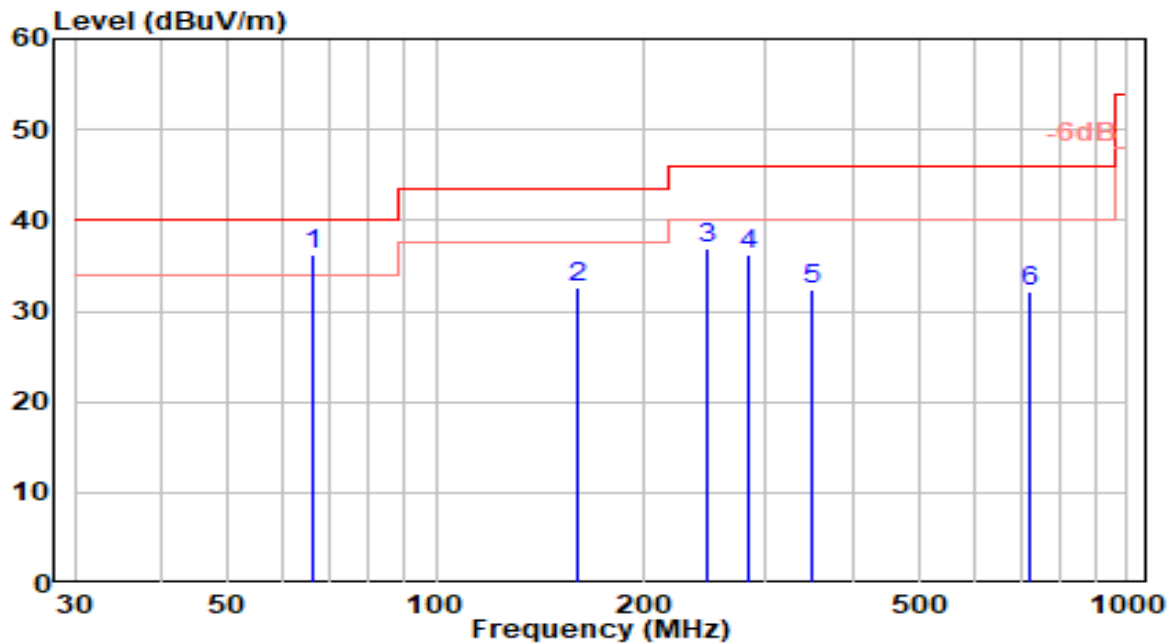


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	66.250	19.17	16.97	36.14	-3.86	40.00	286	219	QP
2		159.940	17.16	15.47	32.63	-10.87	43.50	200	144	QP
3		245.890	17.14	19.68	36.82	-9.18	46.00	200	159	QP
4		284.130	16.06	20.26	36.32	-9.68	46.00	100	224	QP
5		348.340	9.88	22.40	32.28	-13.72	46.00	150	19	QP
6		719.970	3.75	28.47	32.21	-13.79	46.00	100	249	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. The amplitude of radiated emissions (frequency range from 9kHz to 30MHz) is that proximity to ambient noise, which also are attenuated more than 20dB below the permissible value. Therefore, the data is not presented in the report.

EUT	Mobile Computer	Date of Test	2024-07-21
Factor	VULB 9162	Temp. / Humidity	20°C /52%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac-20MHz_Band4_TX_CH 173 ANT 0+1	Test Voltage	By Notebook PC

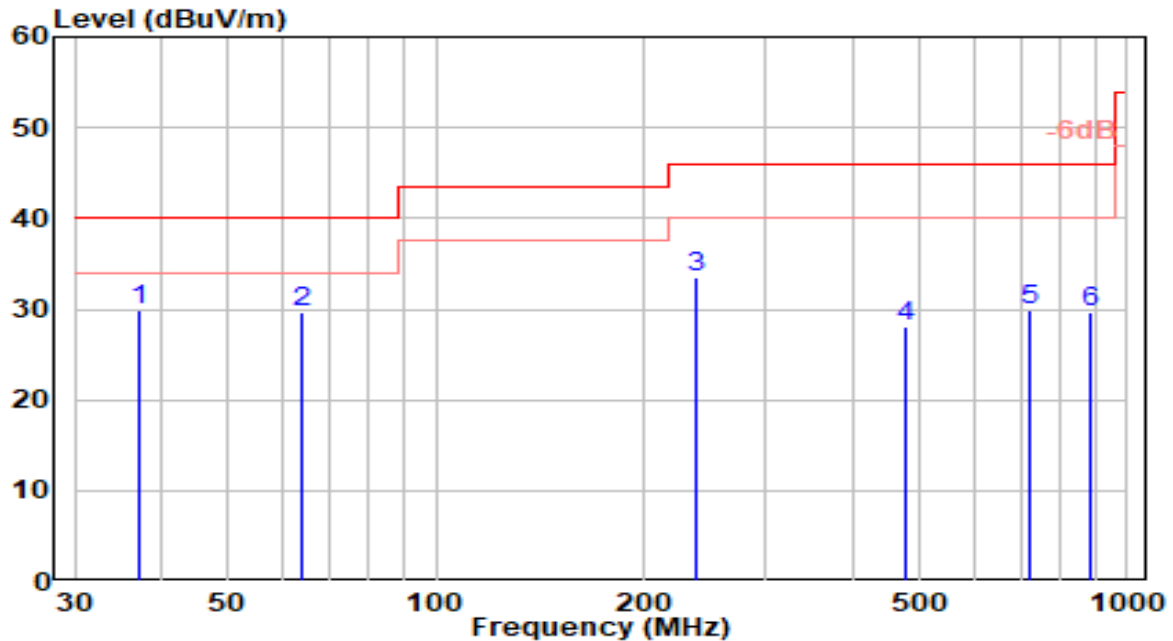


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	37.150	11.25	18.64	29.89	-10.11	40.00	100	5	QP
2		63.910	11.92	17.82	29.74	-10.26	40.00	200	311	QP
3		238.130	14.16	19.29	33.46	-12.54	46.00	200	180	QP
4		478.130	3.61	24.49	28.10	-17.90	46.00	160	12	QP
5		719.850	1.35	28.46	29.82	-16.18	46.00	100	310	QP
6		886.810	-1.07	30.67	29.59	-16.41	46.00	200	60	QP

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.
- The amplitude of radiated emissions (frequency range from 9kHz to 30MHz) is that proximity to ambient noise, which also are attenuated more than 20dB below the permissible value. Therefore, the data is not presented in the report.

EUT	Mobile Computer	Date of Test	2024-07-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /52%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11a_Band4_TX_CH 169 ANT 0+1	Test Voltage	By Notebook PC

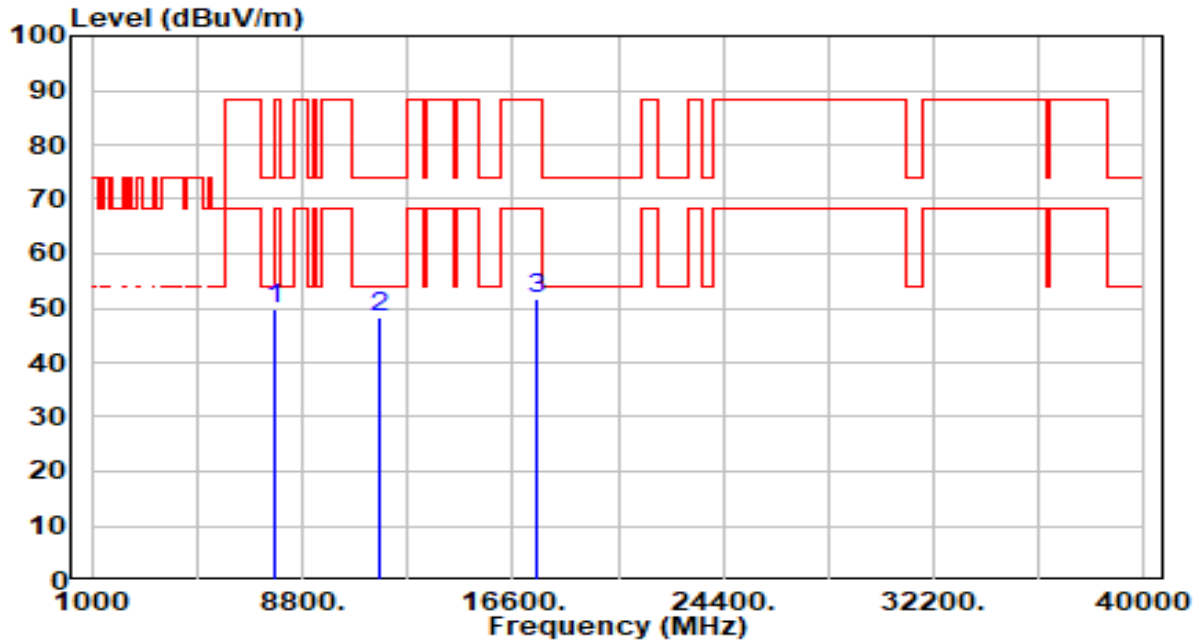


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7793.000	44.21	5.43	49.64	-38.56	88.20	100	317	Peak
2	* 11690.000	42.93	5.33	48.27	-25.73	74.00	100	311	Peak
3	17535.000	46.29	5.34	51.63	-36.57	88.20	100	293	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /52%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11a_Band4_TX_CH 169 ANT 0+1	Test Voltage	By Notebook PC

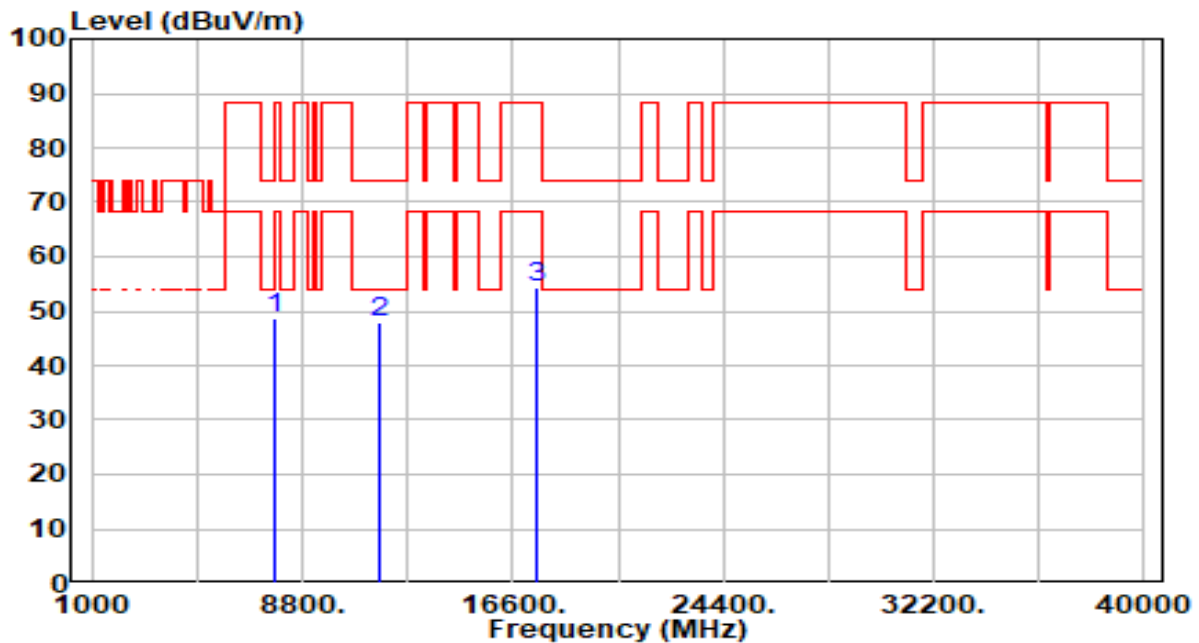


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7794.000	43.41	5.43	48.84	-39.36	88.20	200	195	Peak
2	* 11690.000	42.75	5.33	48.08	-25.92	74.00	100	360	Peak
3	17535.000	49.18	5.34	54.52	-33.68	88.20	200	355	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /52%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11a_Band4_TX_CH 173 ANT 0+1	Test Voltage	By Notebook PC

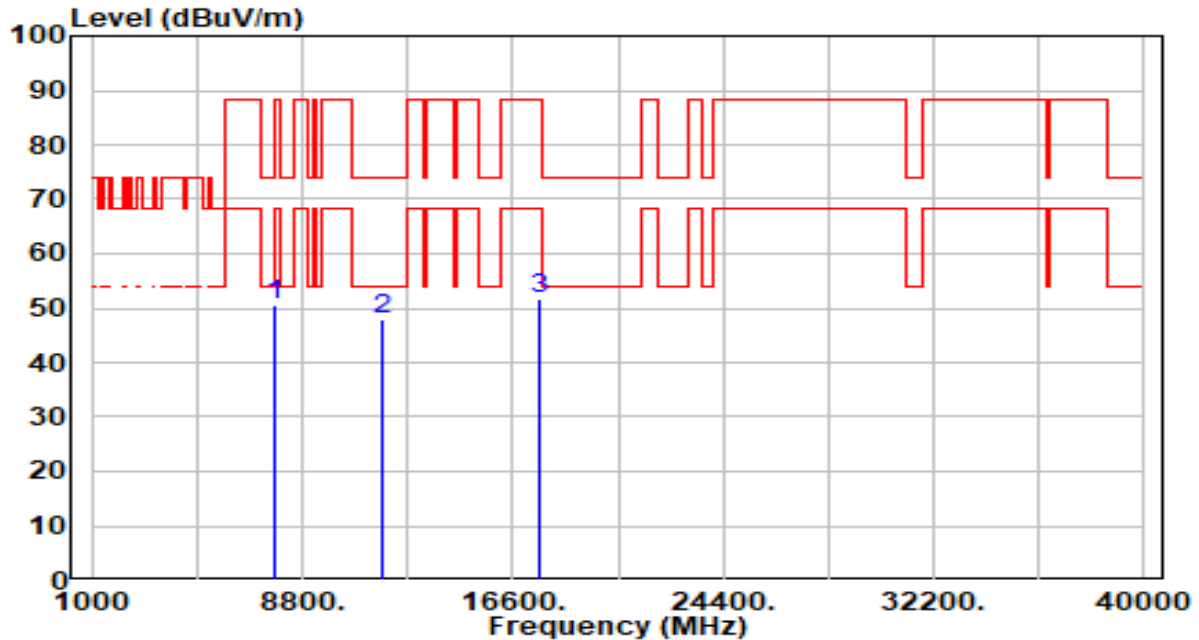


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7820.000	45.08	5.46	50.54	-37.67	88.20	100	318	Peak
2	* 11730.000	42.57	5.30	47.88	-26.12	74.00	100	360	Peak
3	17595.000	46.40	5.41	51.80	-36.40	88.20	100	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /52%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11a_Band4_TX_CH 173 ANT 0+1	Test Voltage	By Notebook PC

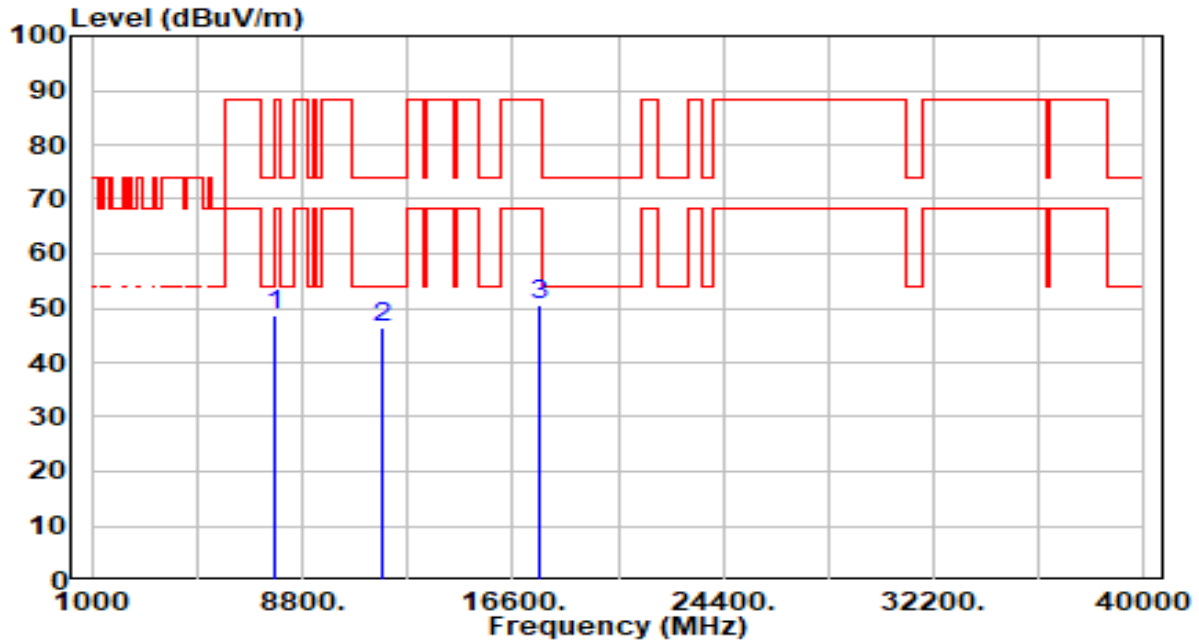


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7820.000	43.27	5.46	48.72	-39.48	88.20	200	221	Peak
2	* 11730.000	41.15	5.30	46.46	-27.54	74.00	200	356	Peak
3	17595.000	45.23	5.41	50.64	-37.56	88.20	200	339	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /52%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11a_Band4_TX_CH 177 ANT 0+1	Test Voltage	By Notebook PC

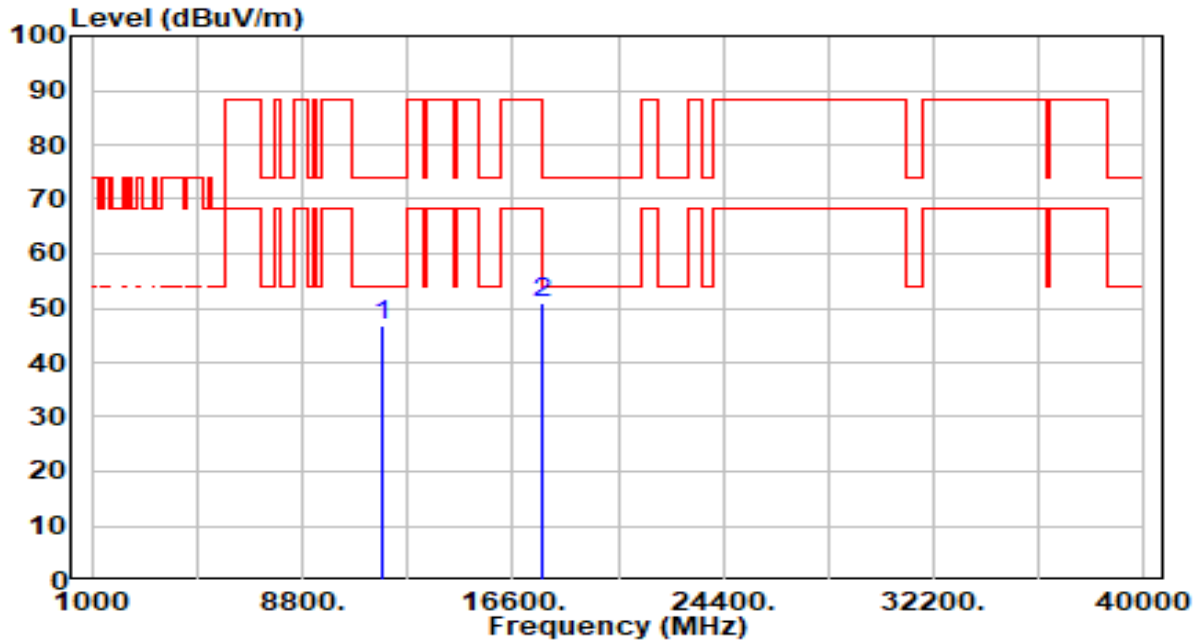


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11770.000	41.67	5.27	46.95	-27.05	74.00	200	257	Peak
2		17655.000	45.71	5.39	51.11	-37.09	88.20	200	306	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /52%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11a_Band4_TX_CH 177 ANT 0+1	Test Voltage	By Notebook PC

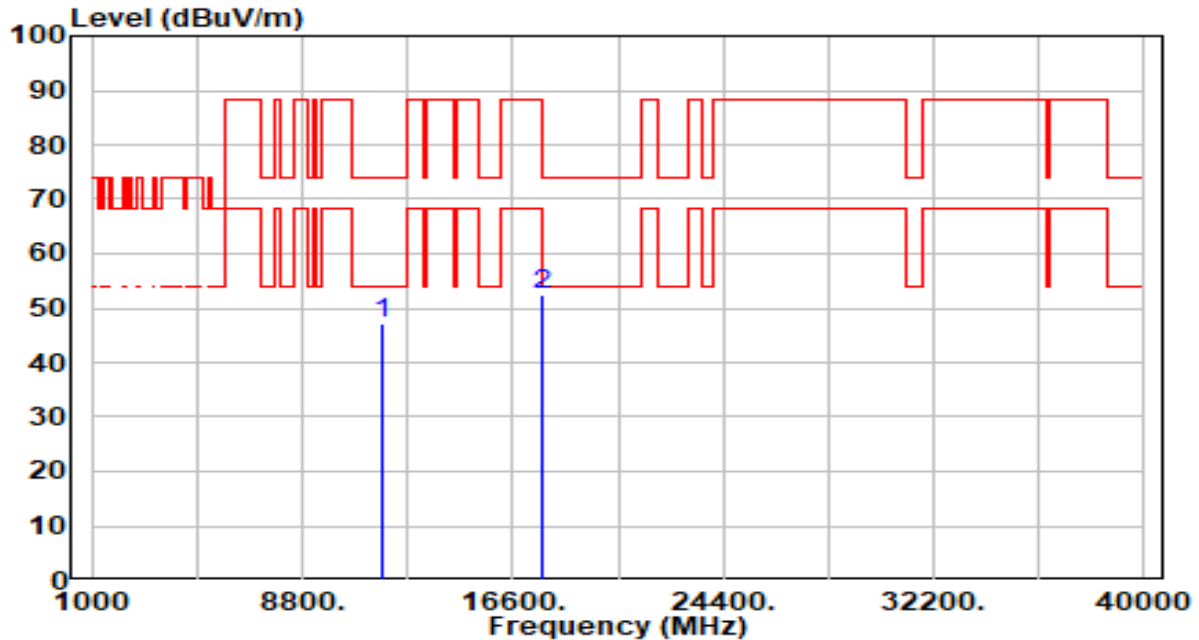


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11770.000	41.93	5.27	47.20	-26.80	74.00	200	25	Peak
2		17655.000	47.02	5.39	52.41	-35.79	88.20	200	334	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /52%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac-20MHz_Band4_TX_CH 169 ANT 0+1	Test Voltage	By Notebook PC

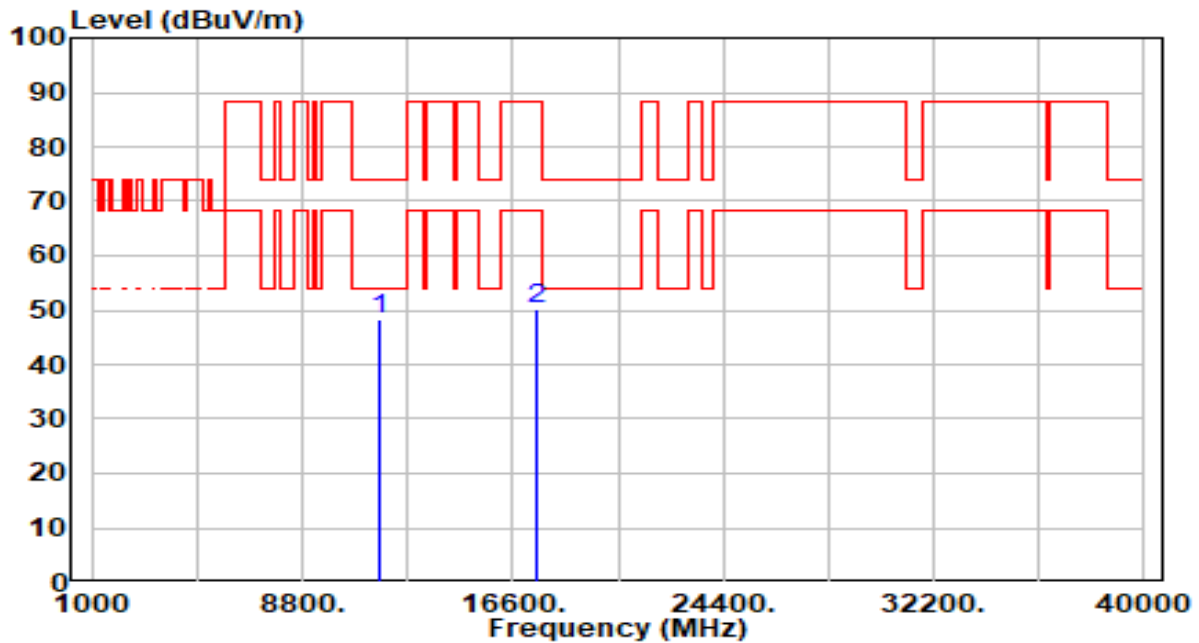


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11690.000	42.81	5.33	48.15	-25.85	74.00	200	130	Peak
2		17535.000	44.67	5.34	50.01	-38.19	88.20	200	10	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /52%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ac-20MHz_Band4_TX_CH 169 ANT 0+1	Test Voltage	By Notebook PC

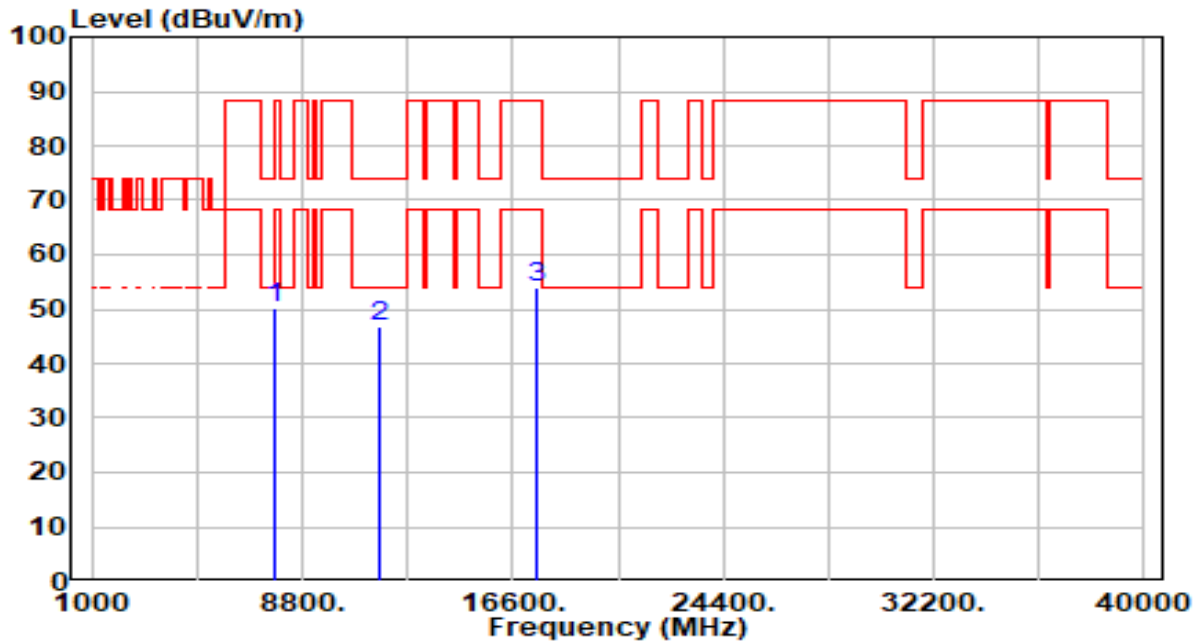


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		7793.000	44.69	5.43	50.12	-38.08	88.20	200	206	Peak
2	*	11690.000	41.36	5.33	46.69	-27.31	74.00	200	188	Peak
3		17535.000	48.46	5.34	53.80	-34.40	88.20	200	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /52%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-20MHz_Band4_TX_CH 173 ANT 0+1	Test Voltage	By Notebook PC

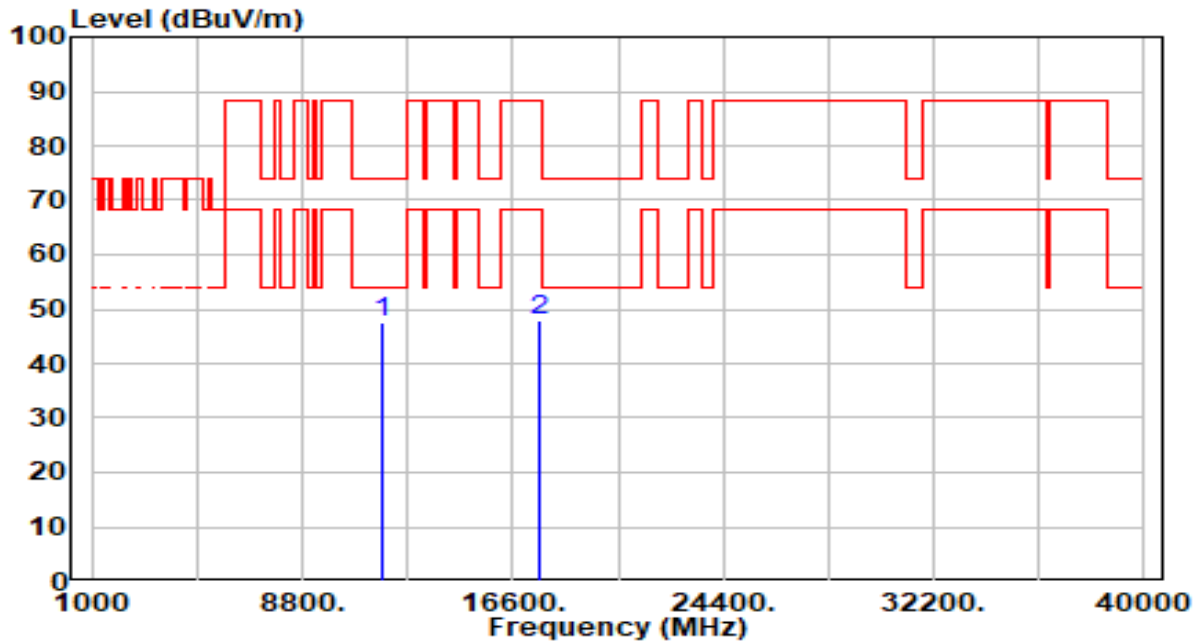


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11730.000	42.15	5.30	47.45	-26.55	74.00	200	310	Peak
2		17595.000	42.61	5.41	48.02	-40.18	88.20	200	316	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /52%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-20MHz_Band4_TX_CH 173 ANT 0+1	Test Voltage	By Notebook PC

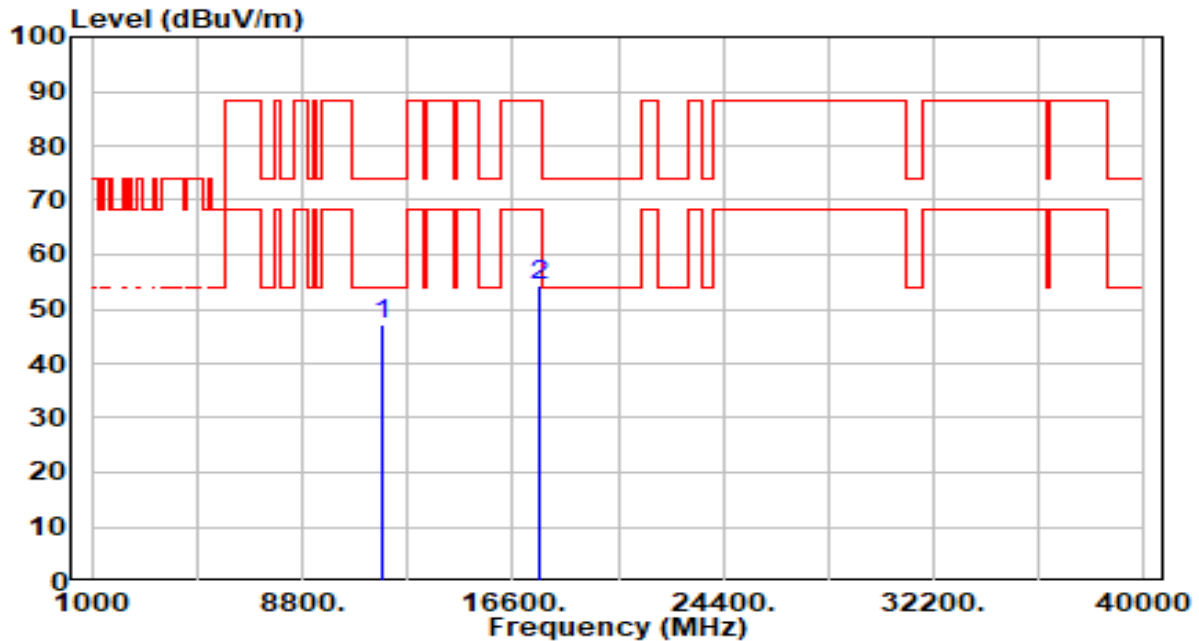


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11730.000	42.00	5.30	47.30	-26.70	74.00	200	209	Peak
2		17595.000	49.09	5.41	54.50	-33.70	88.20	200	0	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /52%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-20MHz_Band4_TX_CH 177 ANT 0+1	Test Voltage	By Notebook PC

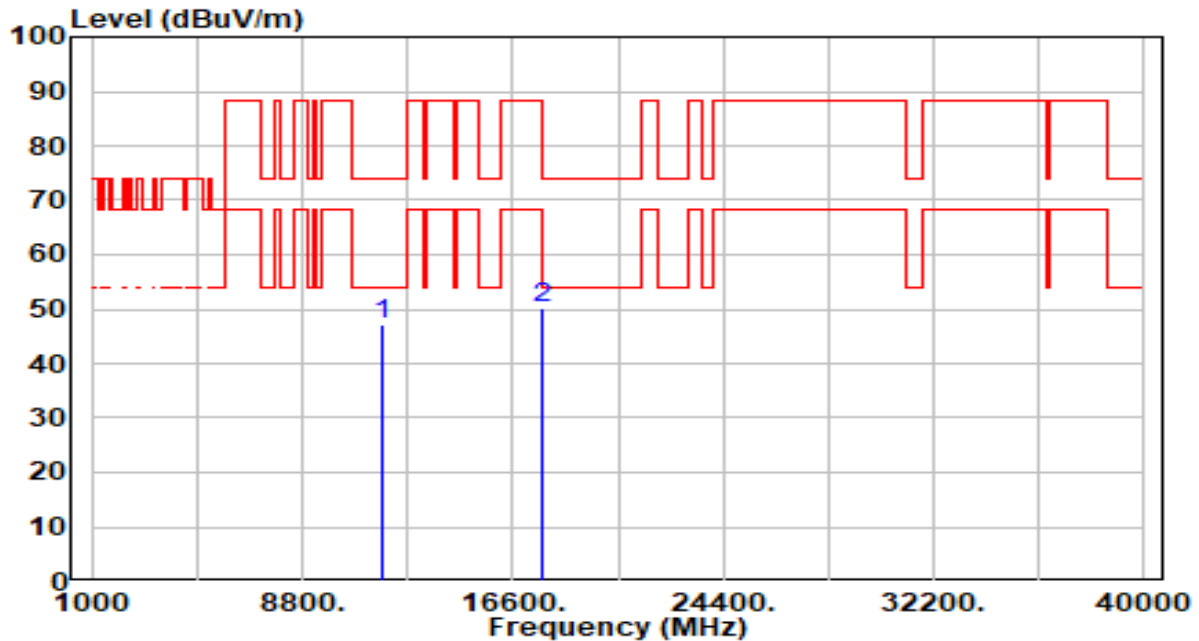


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11770.000	41.79	5.27	47.06	-26.94	74.00	200	322	Peak
2		17655.000	44.86	5.39	50.25	-37.95	88.20	200	31	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /52%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-20MHz_Band4_TX_CH 177 ANT 0+1	Test Voltage	By Notebook PC

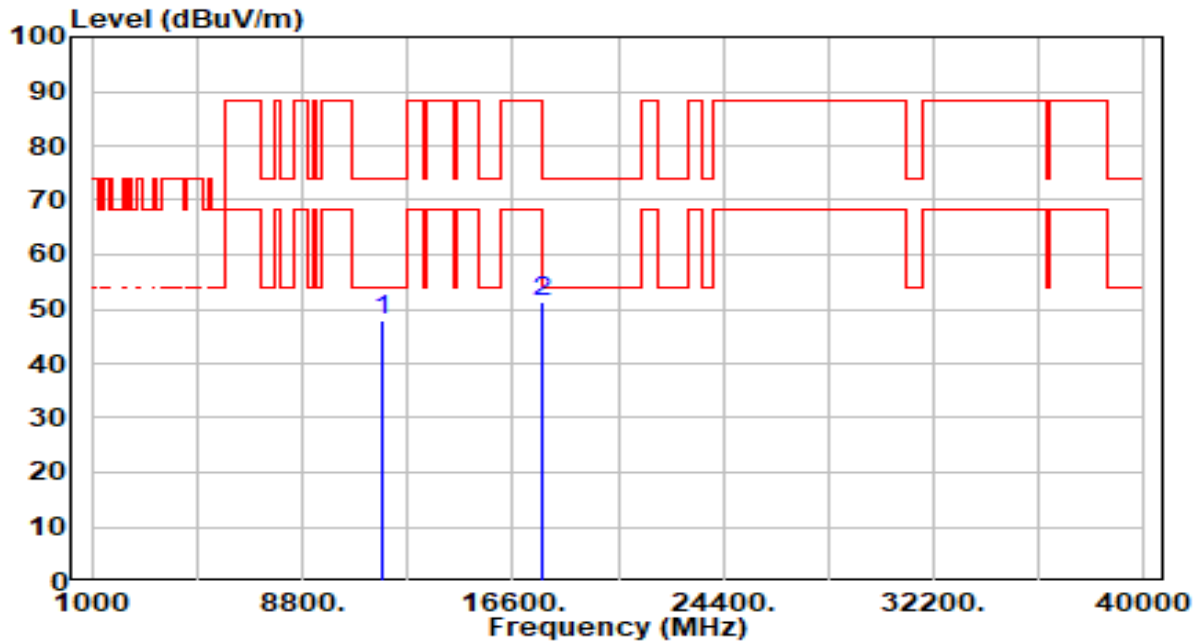


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11770.000	42.69	5.27	47.96	-26.04	74.00	200	355	Peak
2		17655.000	45.91	5.39	51.30	-36.90	88.20	200	343	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /52%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-40MHz_Band4_TX_CH 167 ANT 0+1	Test Voltage	By Notebook PC

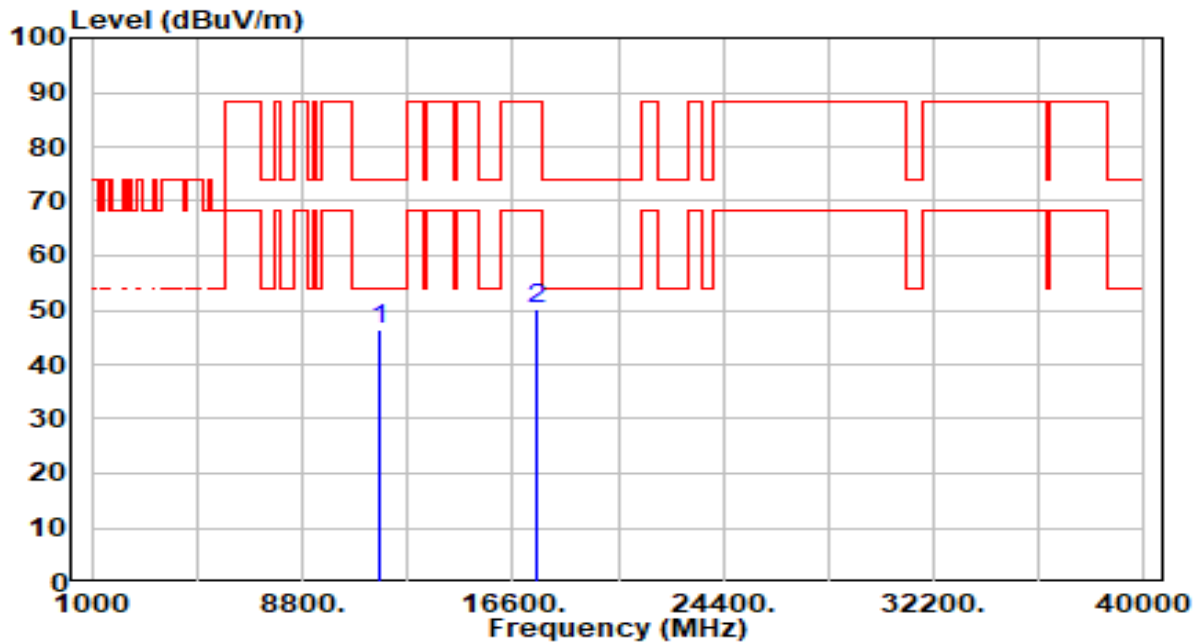


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11670.000	41.21	5.35	46.56	-27.44	74.00	200	133	Peak
2		17505.000	44.89	5.31	50.20	-38.00	88.20	200	10	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /52%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-40MHz_Band4_TX_CH 167 ANT 0+1	Test Voltage	By Notebook PC

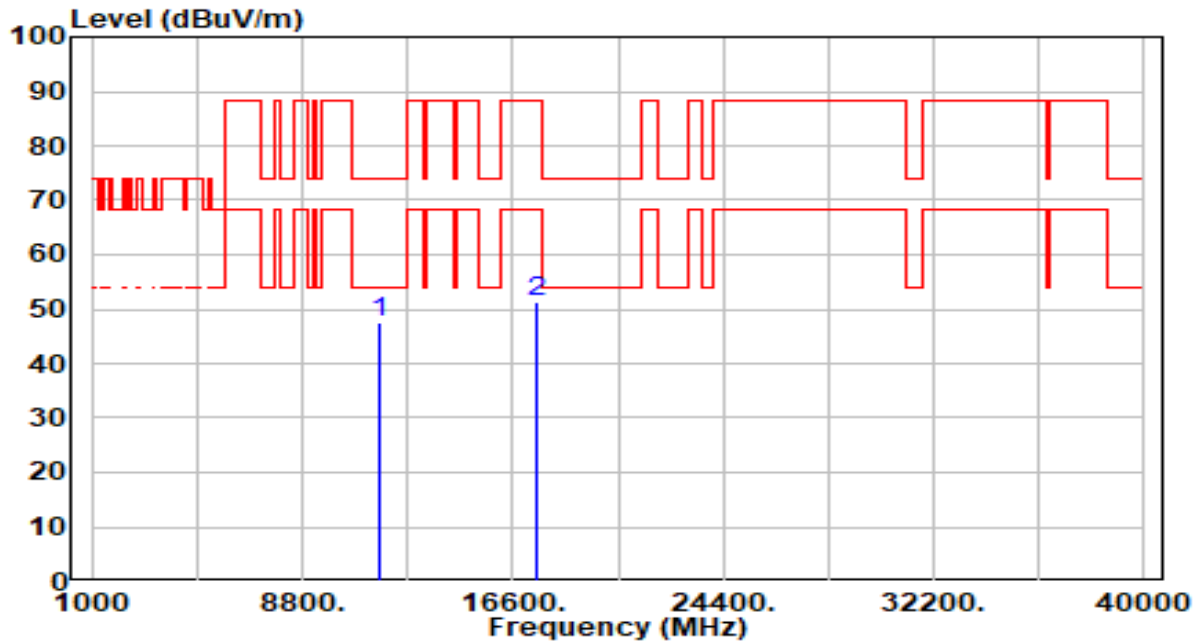


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11670.000	42.04	5.35	47.39	-26.61	74.00	200	320	Peak
2		17505.000	46.06	5.31	51.36	-36.84	88.20	200	337	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /52%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-40MHz_Band4_TX_CH 175 ANT 0+1	Test Voltage	By Notebook PC

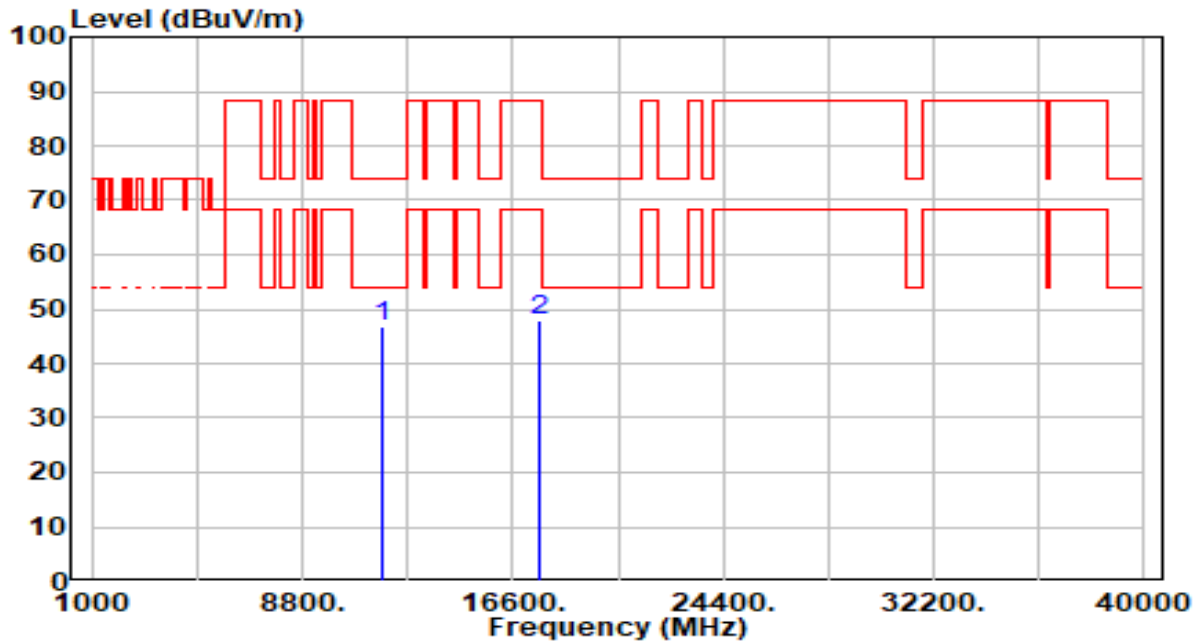


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11750.000	41.38	5.29	46.67	-27.33	74.00	200	50	Peak
2		17625.000	42.64	5.40	48.04	-40.16	88.20	200	296	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /52%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-40MHz_Band4_TX_CH 175 ANT 0+1	Test Voltage	By Notebook PC

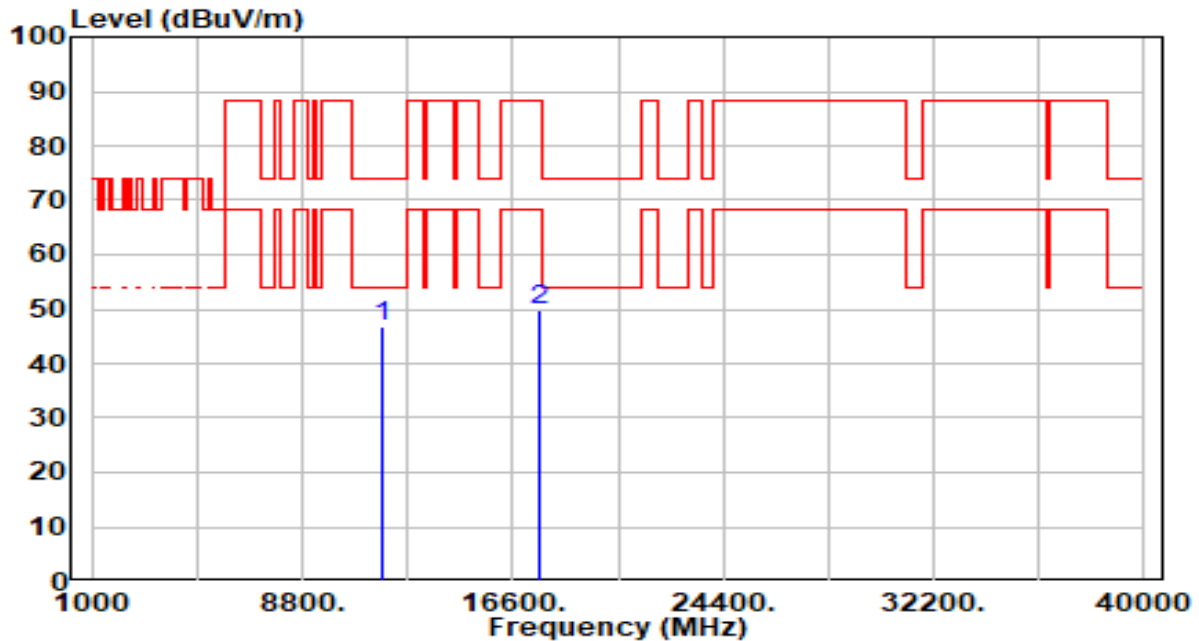


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11750.000	41.38	5.29	46.67	-27.33	74.00	200	134	Peak
2		17625.000	44.41	5.40	49.82	-38.38	88.20	200	358	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /52%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-80MHz_Band4_TX_CH 171 ANT 0+1	Test Voltage	By Notebook PC

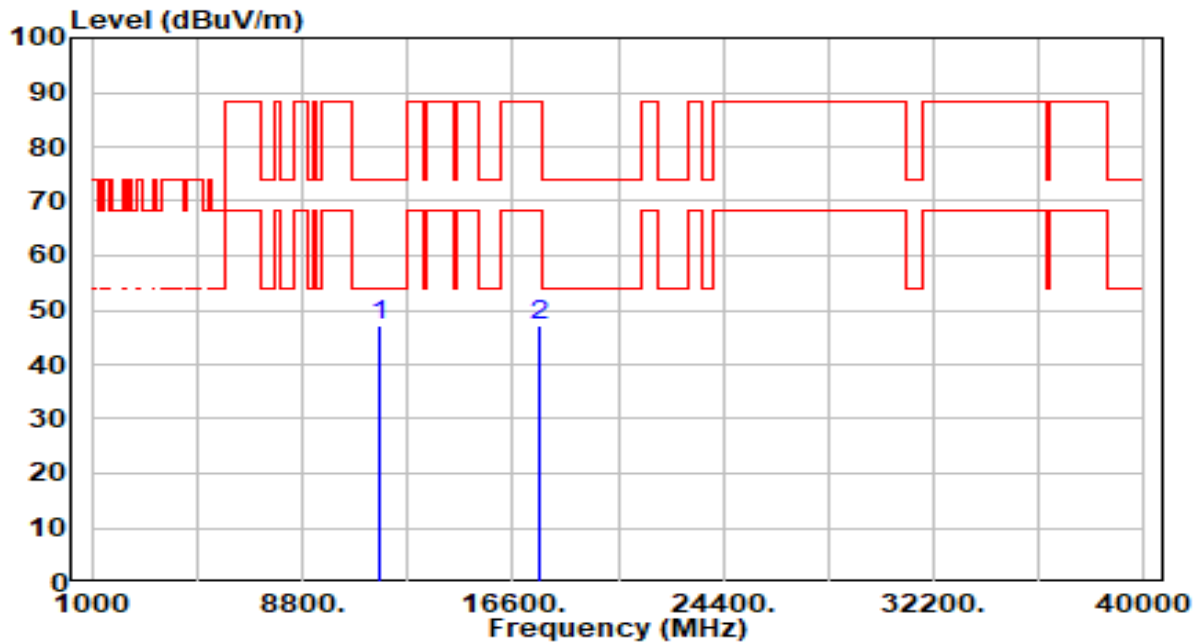


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11710.000	41.89	5.32	47.20	-26.80	74.00	200	61	Peak
2		17565.000	41.86	5.37	47.23	-40.97	88.20	200	41	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /52%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-80MHz_Band4_TX_CH 171 ANT 0+1	Test Voltage	By Notebook PC

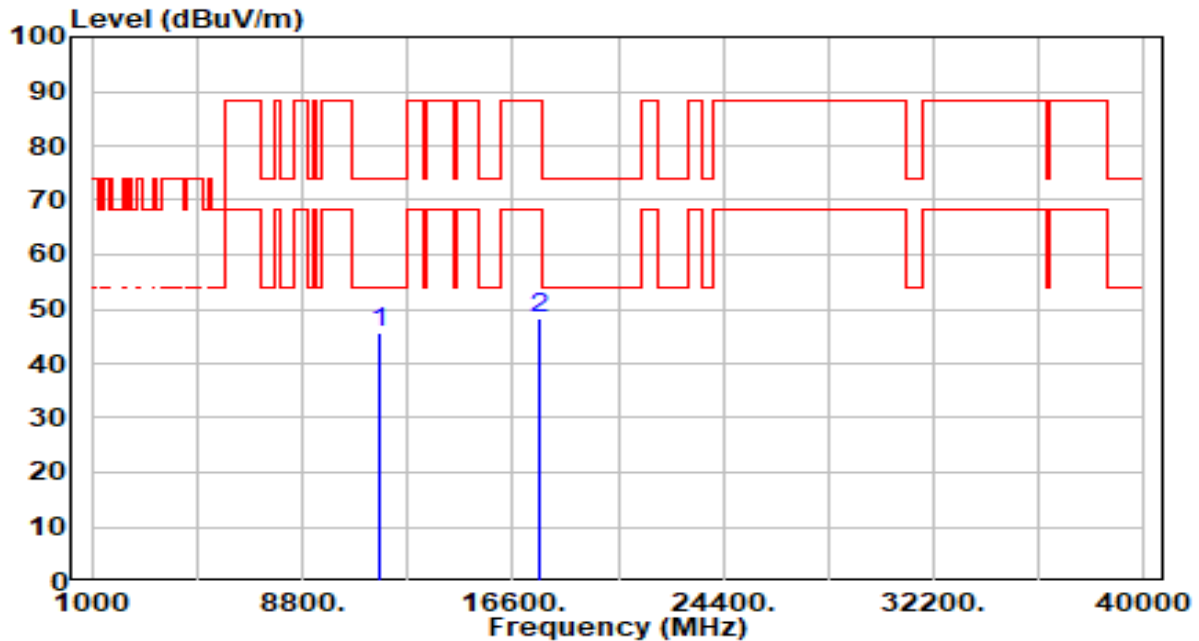


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11710.000	40.44	5.32	45.75	-28.25	74.00	200	140	Peak
2		17565.000	43.00	5.37	48.38	-39.82	88.20	200	342	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /52%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-160MHz_Band4_TX_CH 163 ANT 0+1	Test Voltage	By Notebook PC

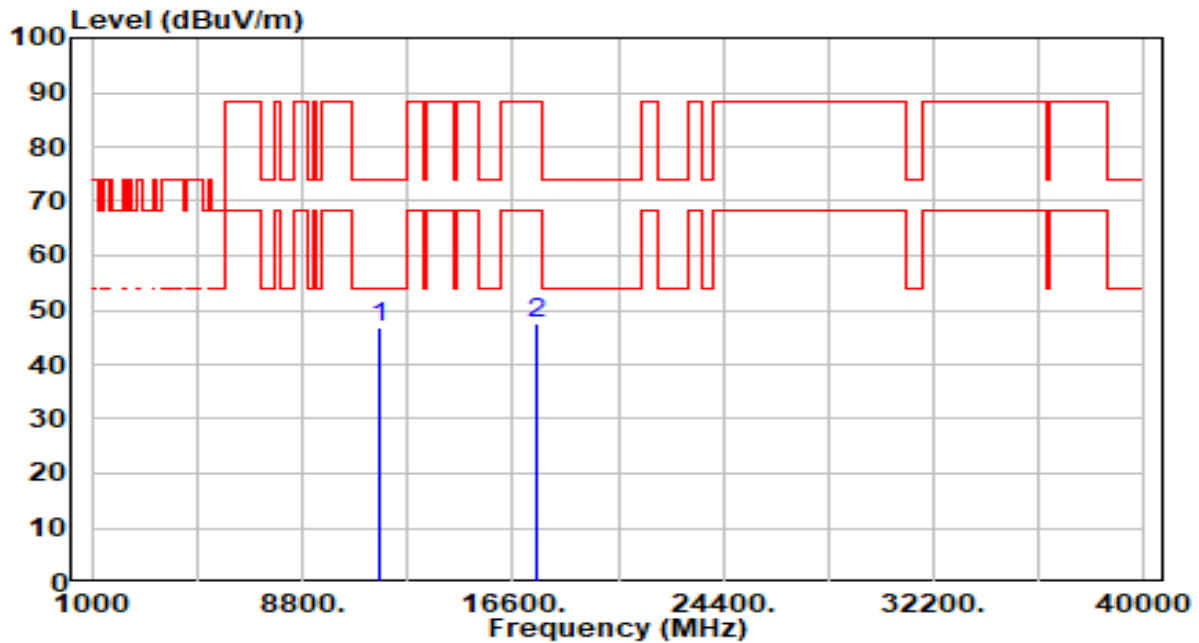


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11630.000	41.43	5.38	46.80	-27.20	74.00	200	68	Peak
2		17445.000	42.16	5.28	47.44	-40.76	88.20	200	74	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /52%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-160MHz_Band4_TX_CH 163 ANT 0+1	Test Voltage	By Notebook PC

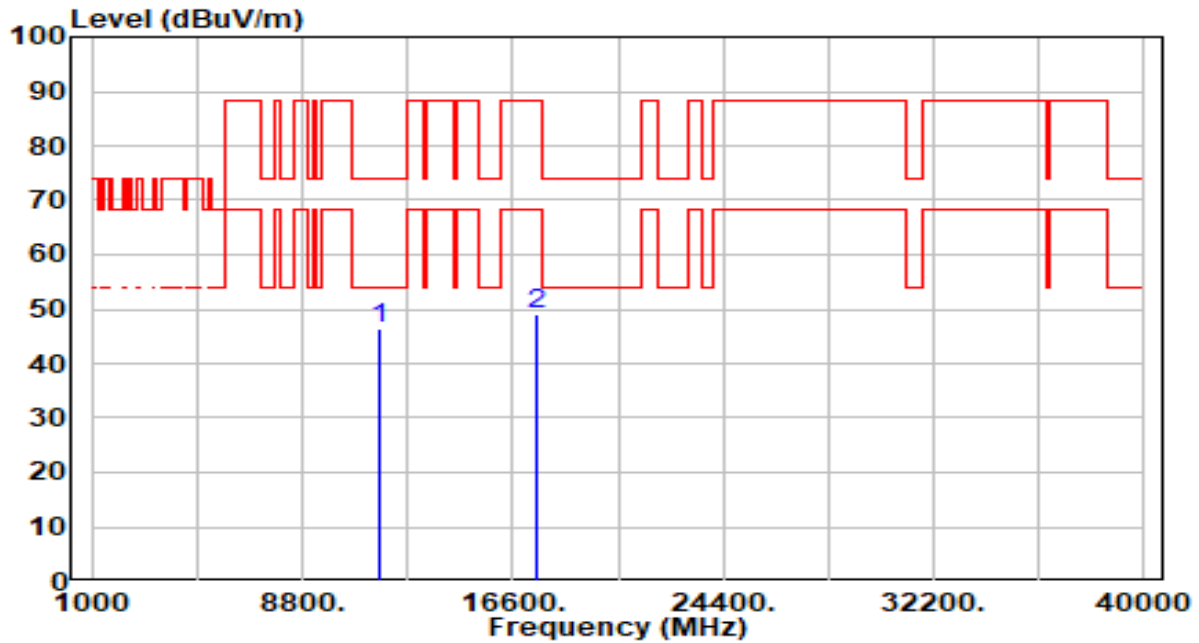


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11630.000	40.90	5.38	46.28	-27.72	74.00	200	72	Peak
2		17445.000	43.71	5.28	49.00	-39.20	88.20	200	352	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /52%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_Band4_TX_CH 169 ANT 0+1	Test Voltage	By Notebook PC

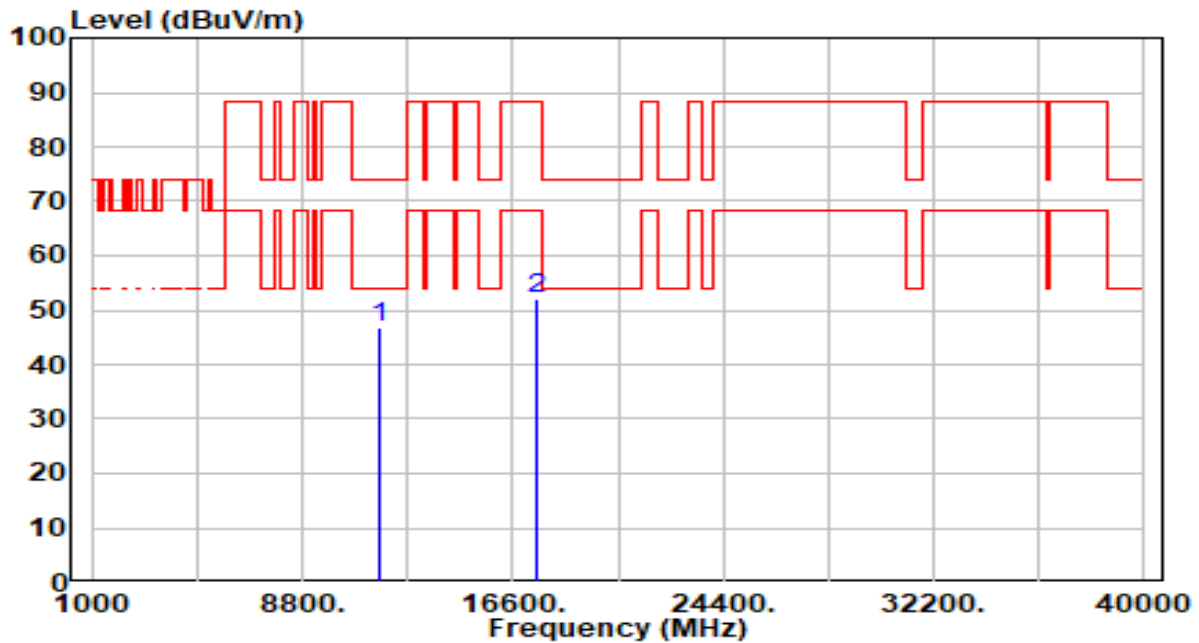


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11690.000	41.48	5.33	46.81	-27.19	74.00	200	52	Peak
2		17535.000	46.74	5.34	52.08	-36.12	88.20	200	4	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /52%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_Band4_TX_CH 169 ANT 0+1	Test Voltage	By Notebook PC

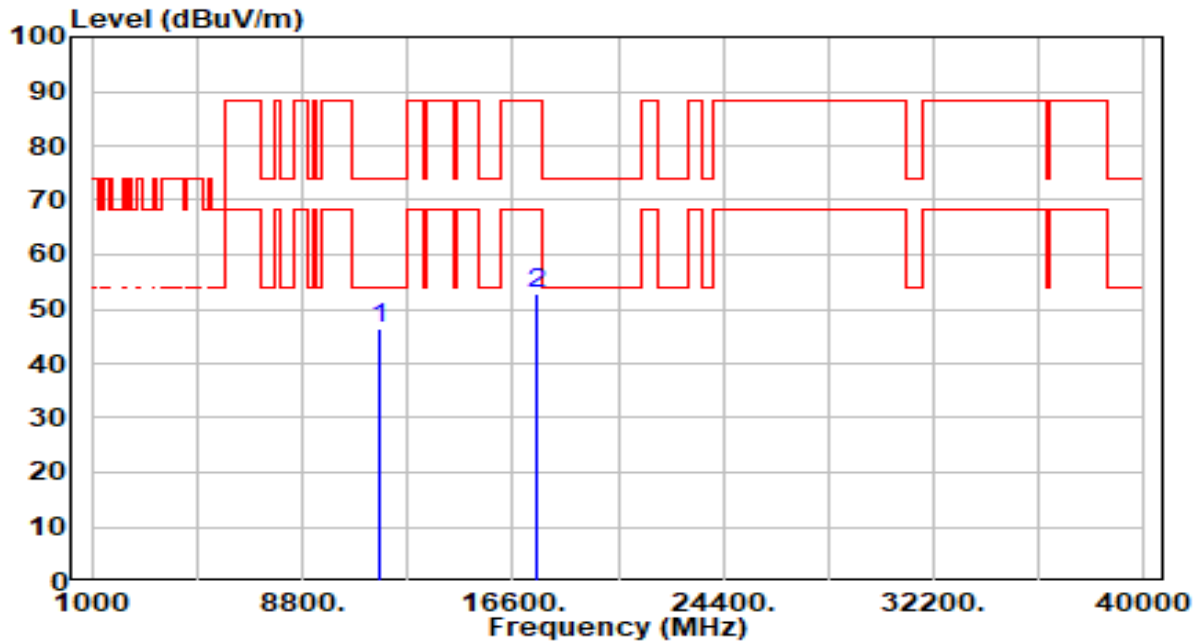


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11690.000	41.23	5.33	46.57	-27.43	74.00	200	142	Peak
2		17535.000	47.50	5.34	52.84	-35.36	88.20	200	353	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /52%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_Band4_TX_CH 173 ANT 0+1	Test Voltage	By Notebook PC

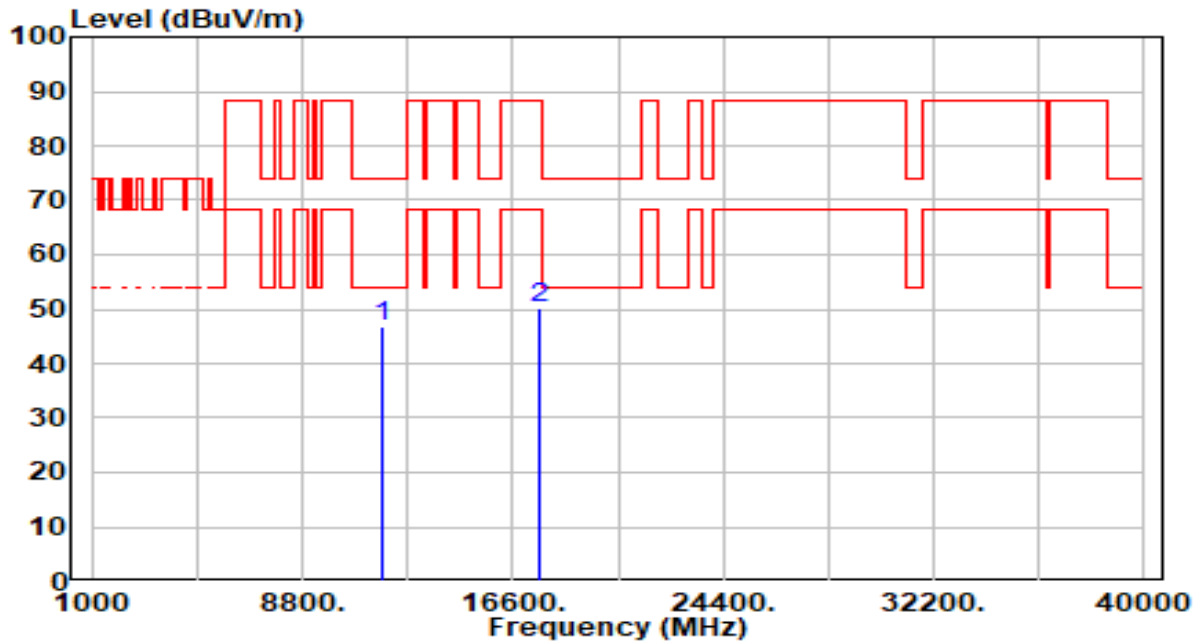


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11730.000	41.45	5.30	46.75	-27.25	74.00	200	22	Peak
2		17595.000	44.93	5.41	50.34	-37.86	88.20	200	14	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /52%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_Band4_TX_CH 173 ANT 0+1	Test Voltage	By Notebook PC

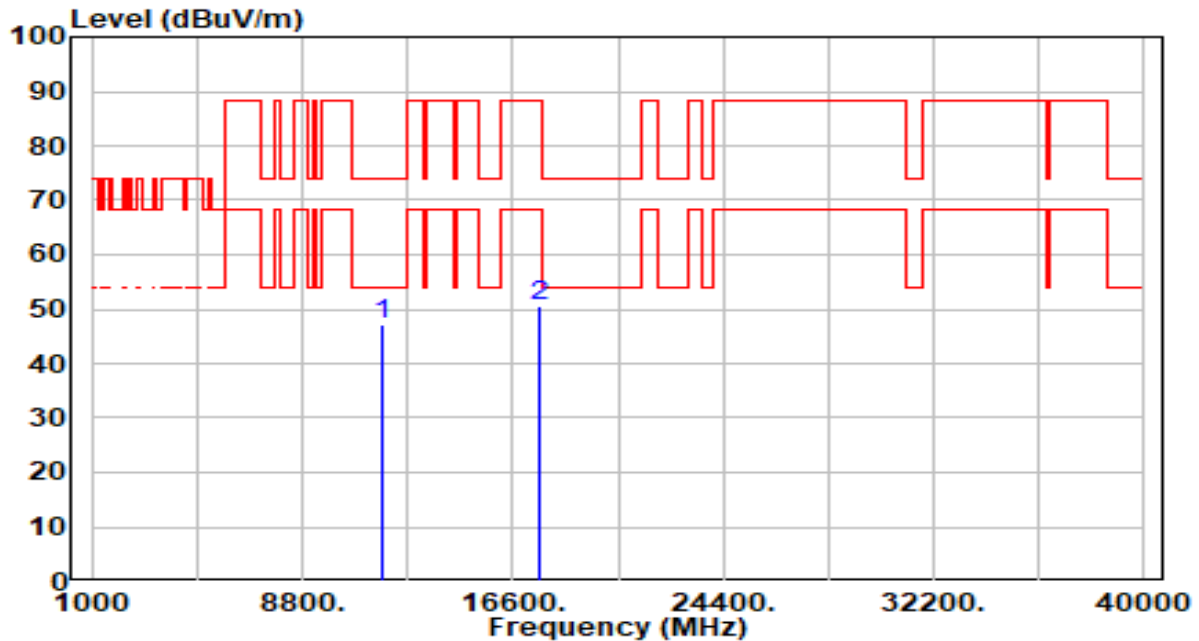


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11730.000	42.05	5.30	47.35	-26.65	74.00	200	216	Peak
2		17595.000	45.29	5.41	50.70	-37.50	88.20	200	335	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /52%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_Band4_TX_CH 177 ANT 0+1	Test Voltage	By Notebook PC

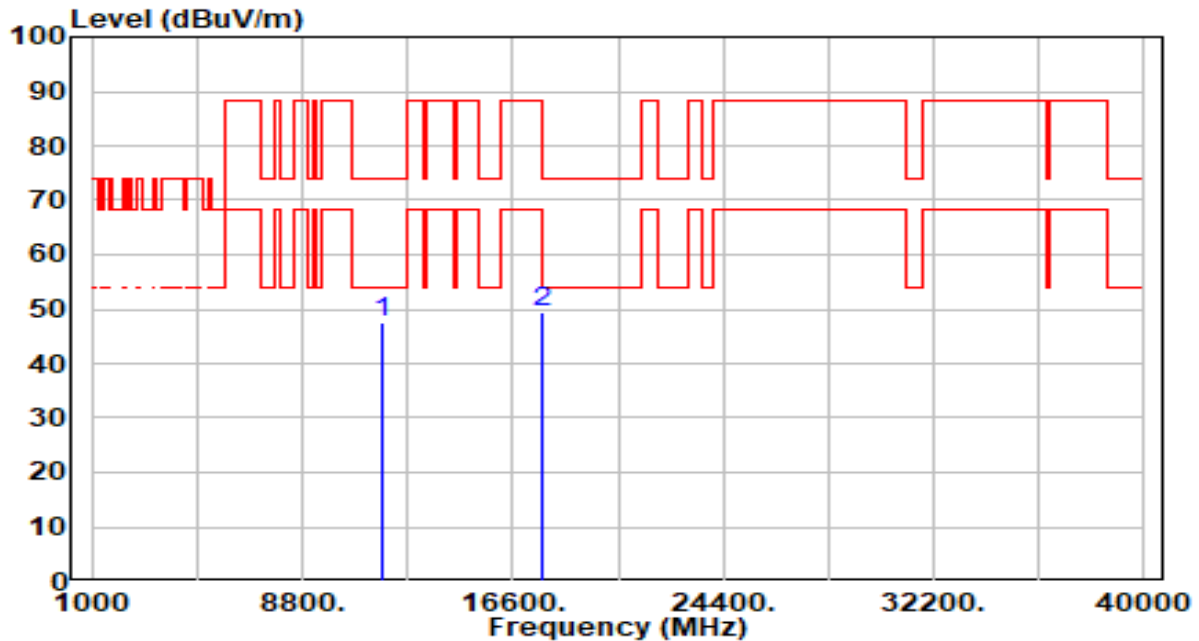


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11770.000	42.25	5.27	47.53	-26.47	74.00	200	0	Peak
2		17655.000	43.86	5.39	49.25	-38.95	88.20	200	286	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /52%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_Band4_TX_CH 177 ANT 0+1	Test Voltage	By Notebook PC

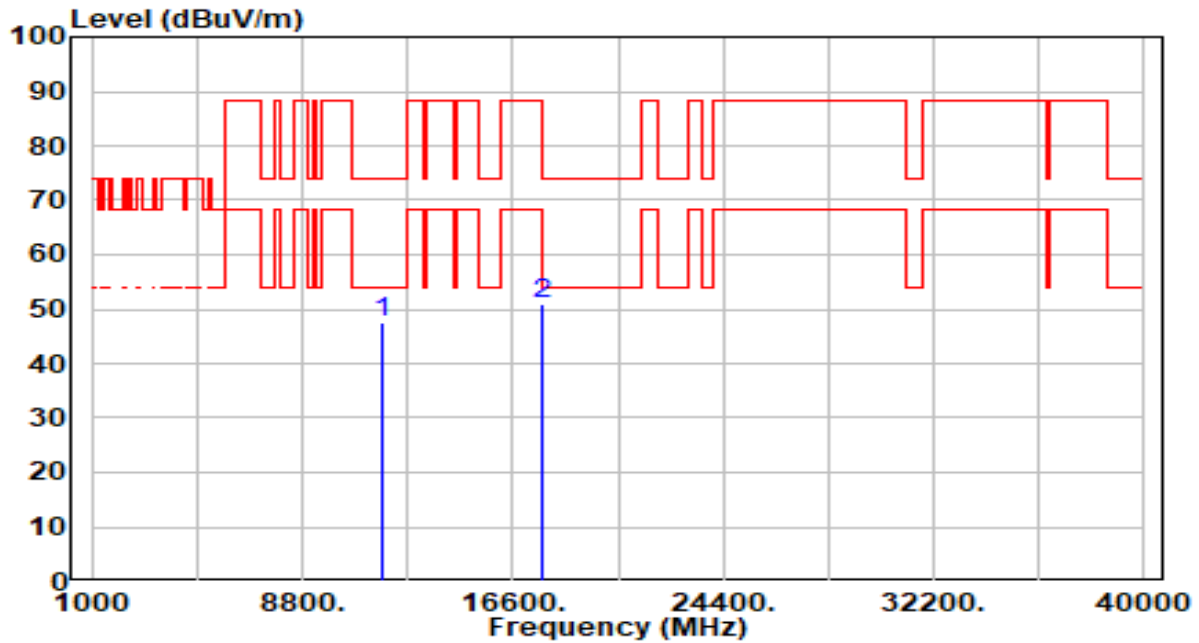


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11770.000	42.13	5.27	47.40	-26.60	74.00	200	360	Peak
2		17655.000	45.54	5.39	50.94	-37.26	88.20	200	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /52%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_Band4_TX_CH 167 ANT 0+1	Test Voltage	By Notebook PC

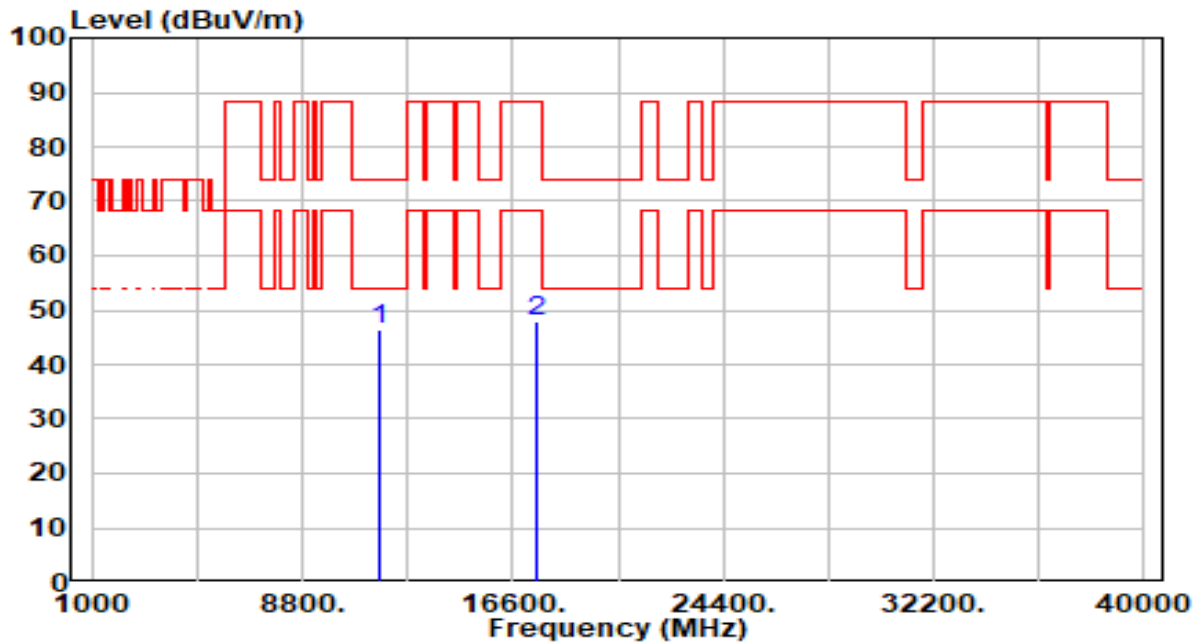


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11670.000	41.12	5.35	46.47	-27.53	74.00	200	186	Peak
2		17505.000	42.62	5.31	47.93	-40.27	88.20	200	10	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /52%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_Band4_TX_CH 167 ANT 0+1	Test Voltage	By Notebook PC

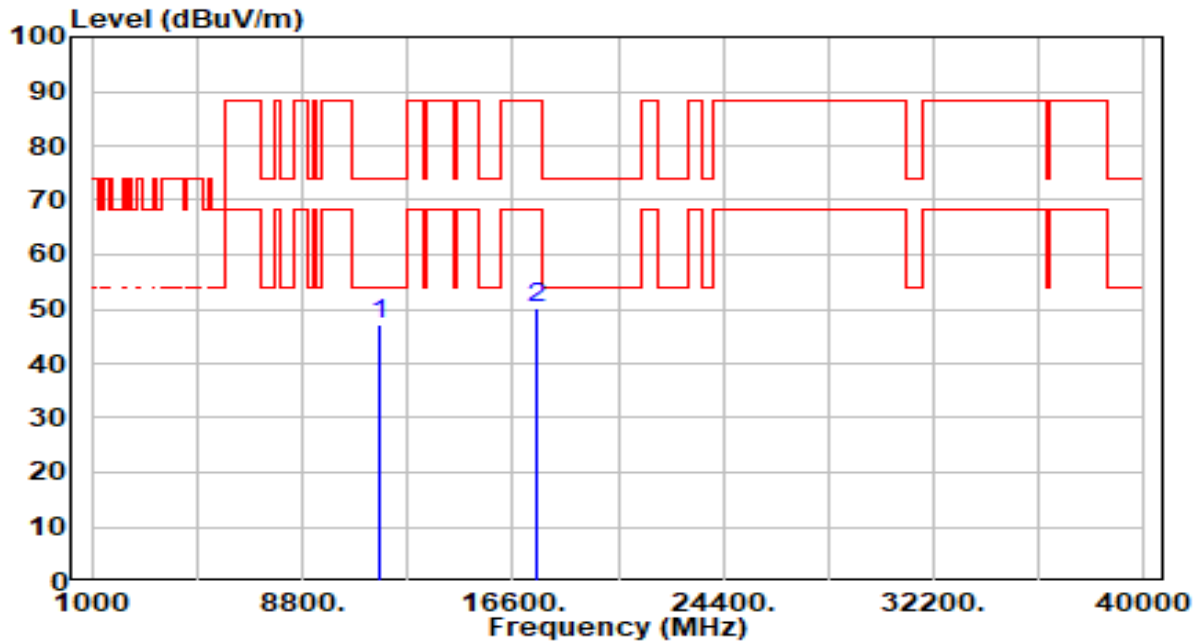


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11670.000	41.90	5.35	47.25	-26.75	74.00	200	83	Peak
2		17505.000	45.01	5.31	50.32	-37.88	88.20	200	346	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /52%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_Band4_TX_CH 175 ANT 0+1	Test Voltage	By Notebook PC

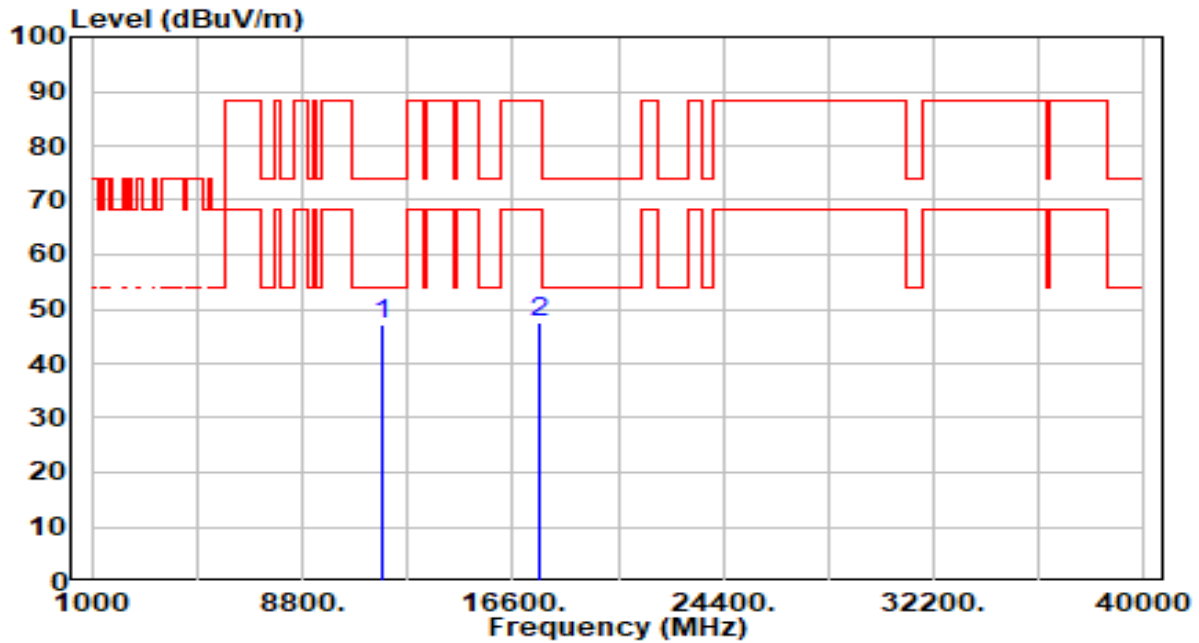


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11750.000	41.75	5.29	47.04	-26.96	74.00	200	0	Peak
2		17625.000	42.17	5.40	47.57	-40.63	88.20	200	336	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /52%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_Band4_TX_CH 175 ANT 0+1	Test Voltage	By Notebook PC

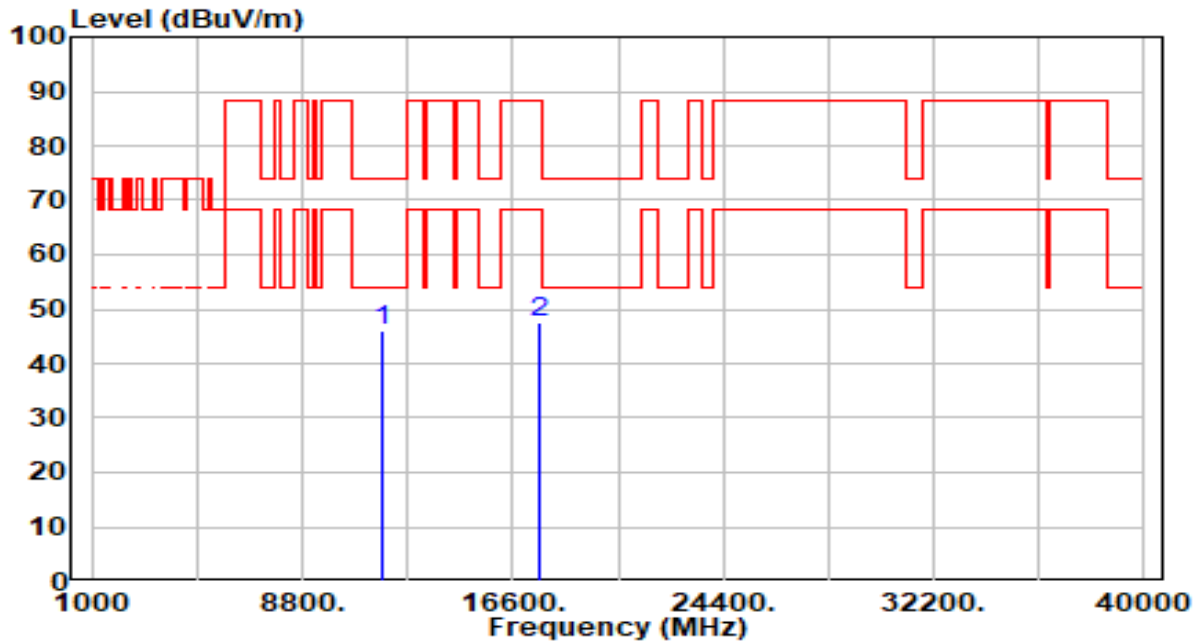


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11750.000	40.92	5.29	46.20	-27.80	74.00	200	108	Peak
2		17625.000	42.08	5.40	47.49	-40.71	88.20	200	154	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /52%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-80MHz_Band4_TX_CH 171 ANT 0+1	Test Voltage	By Notebook PC

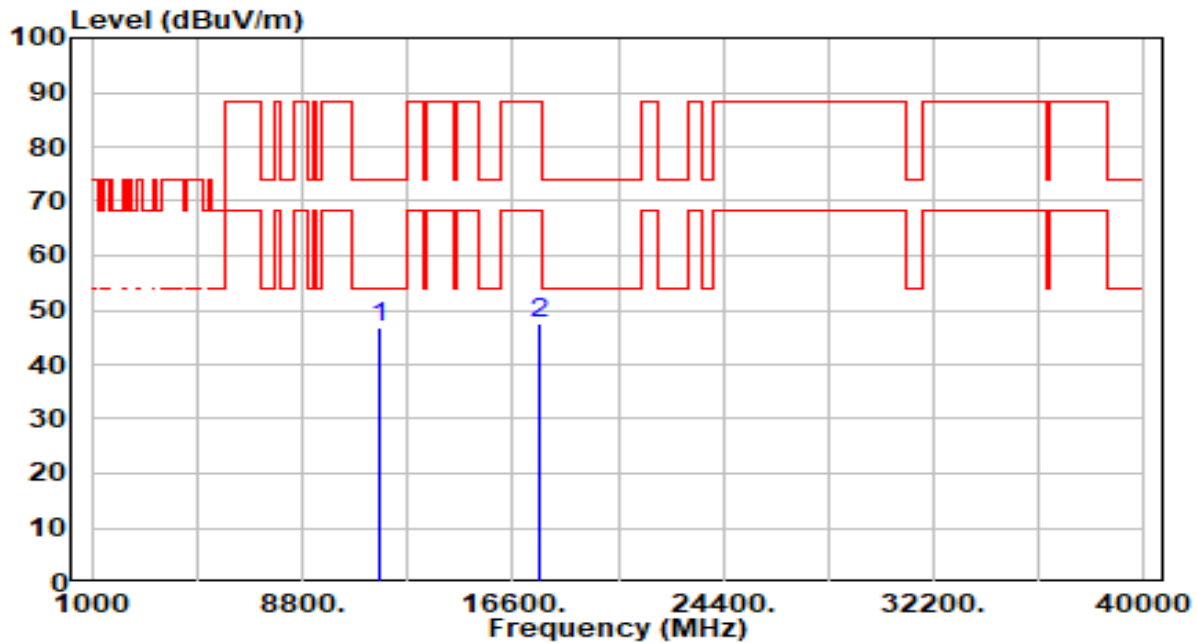


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11710.000	41.64	5.32	46.96	-27.04	74.00	200	1	Peak
2		17565.000	42.35	5.37	47.72	-40.48	88.20	200	37	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /52%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-80MHz_Band4_TX_CH 171 ANT 0+1	Test Voltage	By Notebook PC

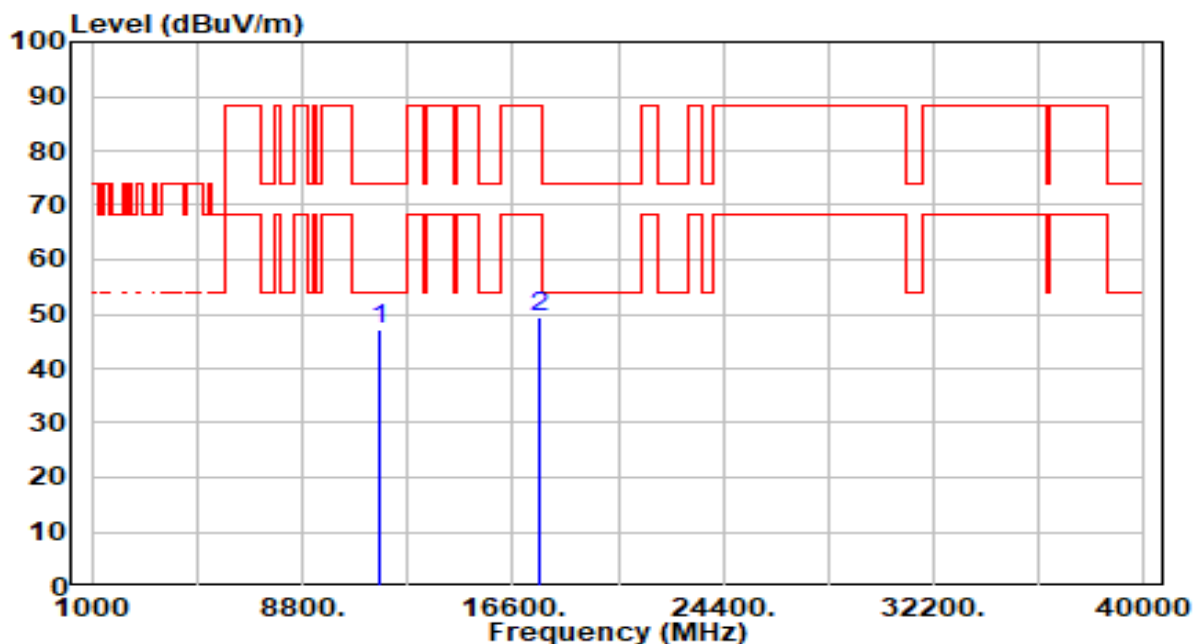


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11710.000	41.79	5.32	47.10	-26.90	74.00	200	298	Peak
2		17565.000	44.06	5.37	49.43	-38.77	88.20	200	341	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /52%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-160MHz_Band4_TX_CH 163 ANT 0+1	Test Voltage	By Notebook PC

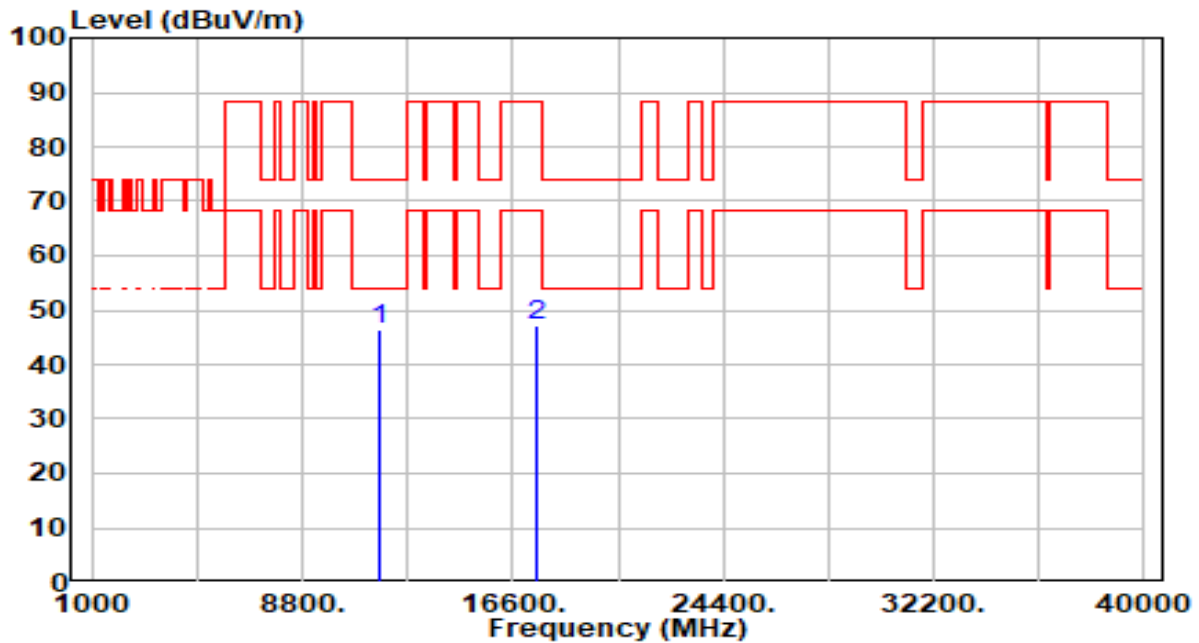


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11630.000	40.96	5.38	46.34	-27.66	74.00	200	162	Peak
2		17445.000	41.95	5.28	47.23	-40.97	88.20	200	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-22
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /52%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-160MHz_Band4_TX_CH 163 ANT 0+1	Test Voltage	By Notebook PC

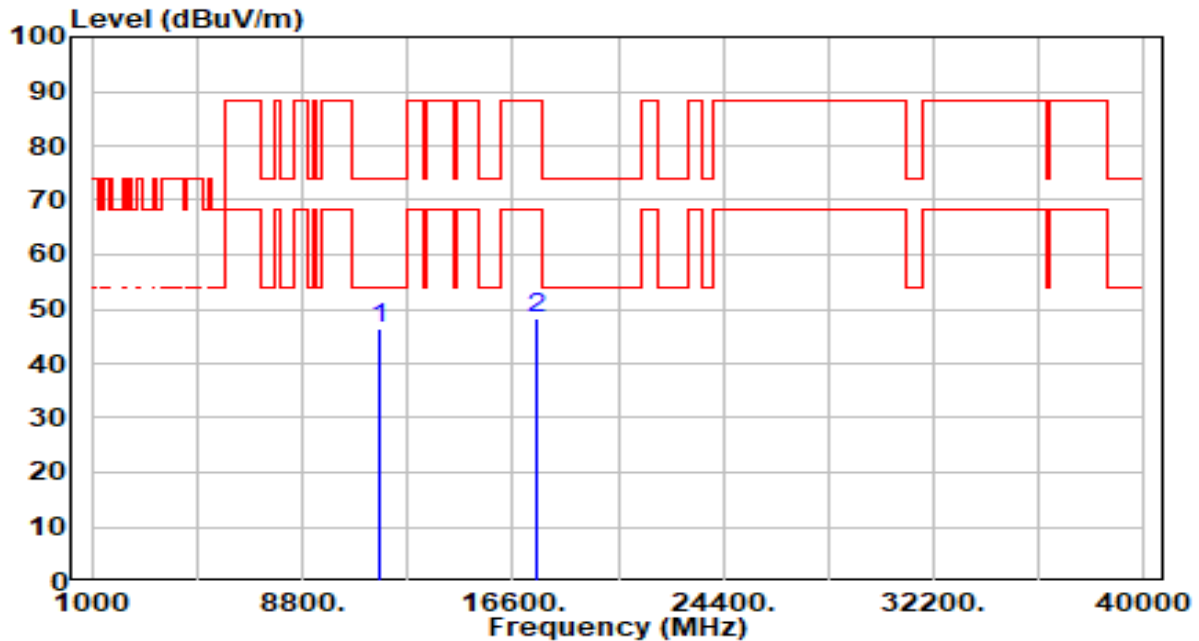


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11630.000	40.91	5.38	46.29	-27.71	74.00	200	48	Peak
2		17445.000	43.02	5.28	48.31	-39.89	88.20	200	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-23
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_26Tone_RU0_Band4_TX_CH 169 ANT 0+1	Test Voltage	By Notebook PC

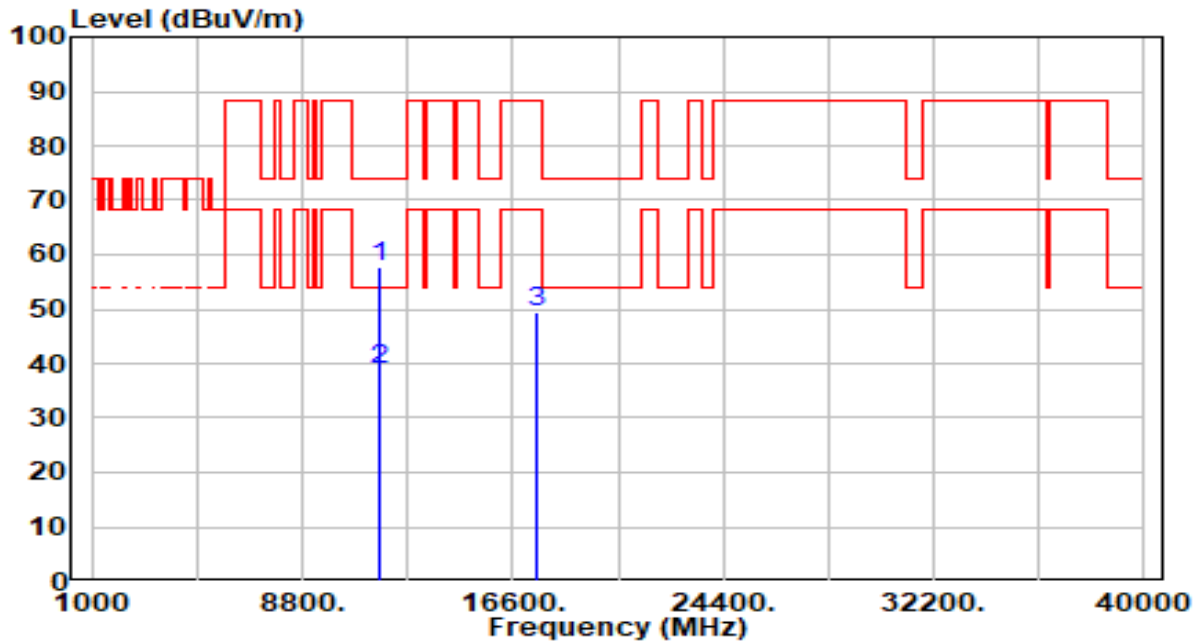


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11690.000	52.27	5.33	57.60	-16.40	74.00	100	6	Peak
2	*	11690.000	33.70	5.33	39.03	-14.97	54.00	100	6	Average
3		17535.000	44.06	5.34	49.40	-38.80	88.20	100	289	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-23
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_26Tone_RU0_Band4_TX_CH 169 ANT 0+1	Test Voltage	By Notebook PC

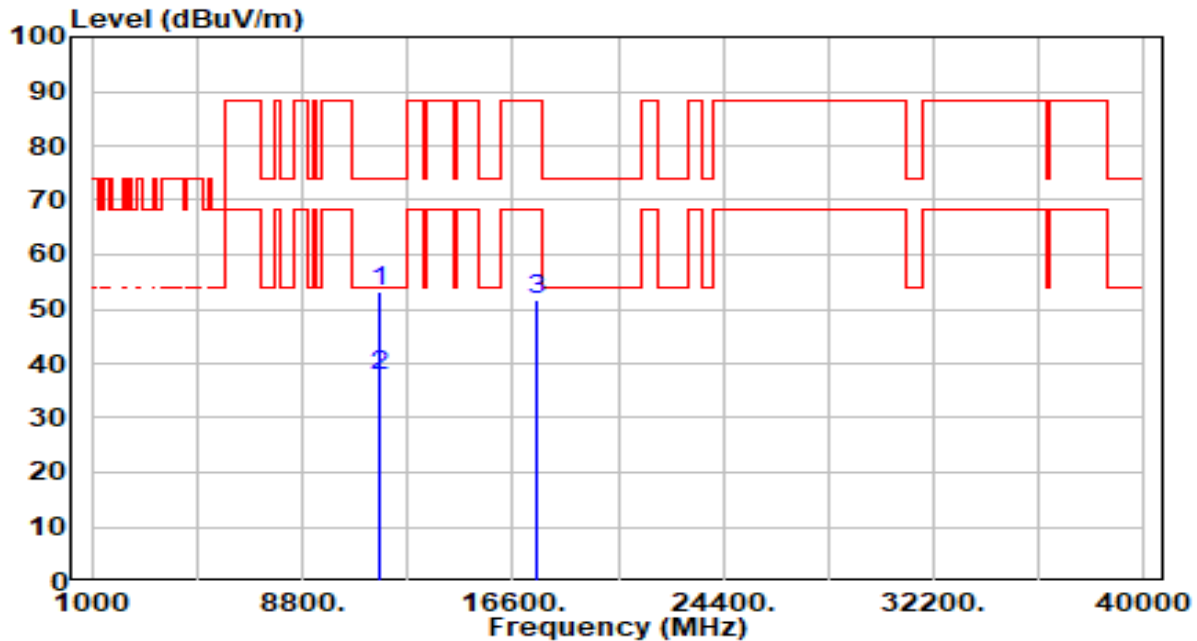


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11690.000	47.98	5.33	53.31	-20.69	74.00	100	35	Peak
2	*	11690.000	32.40	5.33	37.73	-16.27	54.00	100	35	Average
3		17535.000	46.46	5.34	51.80	-36.40	88.20	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-23
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_26Tone_RU8_Band4_TX_CH 177 ANT 0+1	Test Voltage	By Notebook PC

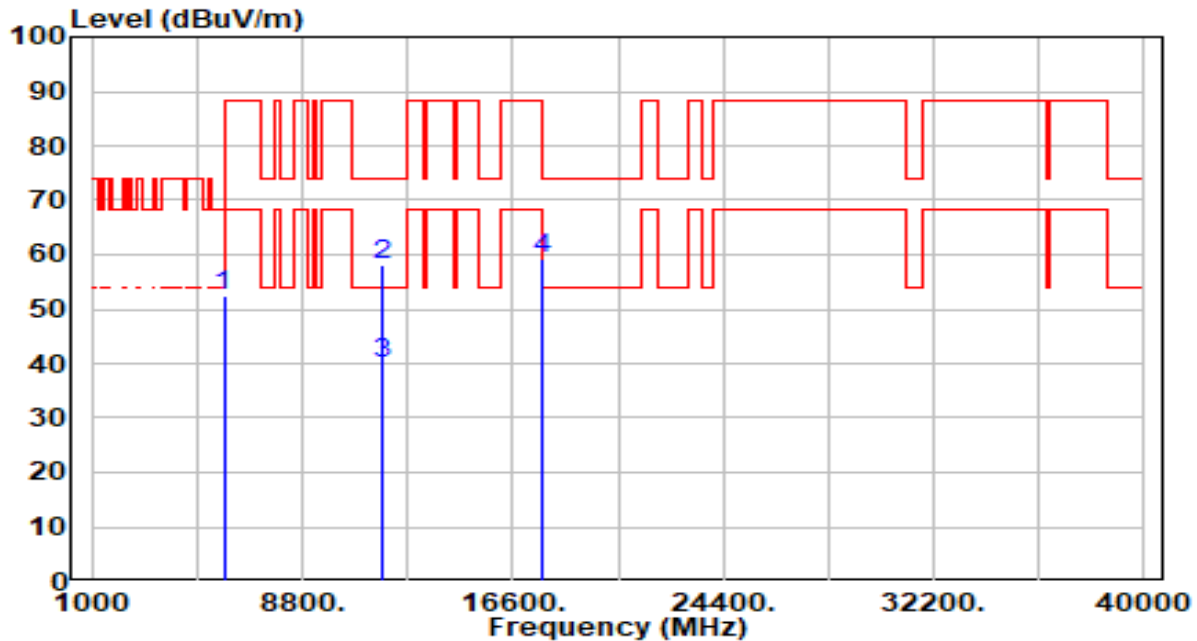


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5893.000	50.07	2.26	52.33	-15.87	68.20	100	266	Peak
2	*	11770.000	52.90	5.27	58.17	-15.83	74.00	100	38	Peak
3	*	11770.000	34.83	5.27	40.10	-13.90	54.00	100	38	Average
4		17655.000	53.76	5.39	59.15	-29.05	88.20	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-23
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_26Tone_RU8_Band4_TX_CH 177 ANT 0+1	Test Voltage	By Notebook PC

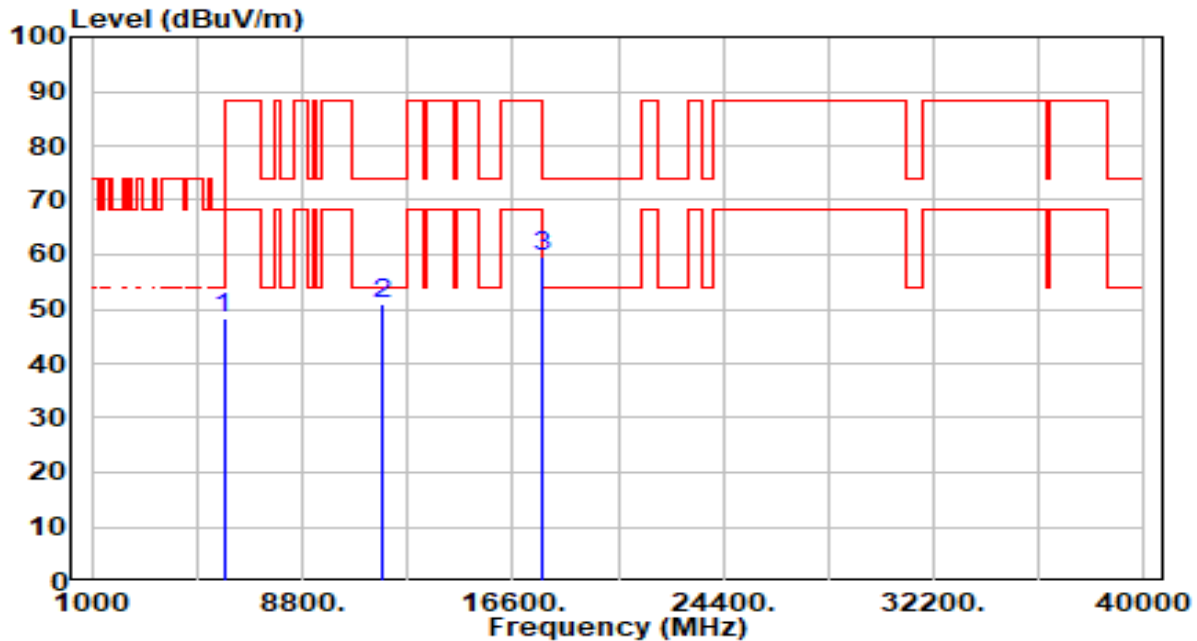


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5893.000	45.91	2.26	48.17	-20.03	68.20	100	4	Peak
2		11770.000	45.57	5.27	50.85	-23.15	74.00	100	44	Peak
3		17655.000	54.05	5.39	59.44	-28.76	88.20	100	342	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-23
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_52Tone_RU74_Band4_TX_CH 169 ANT 0+1	Test Voltage	By Notebook PC

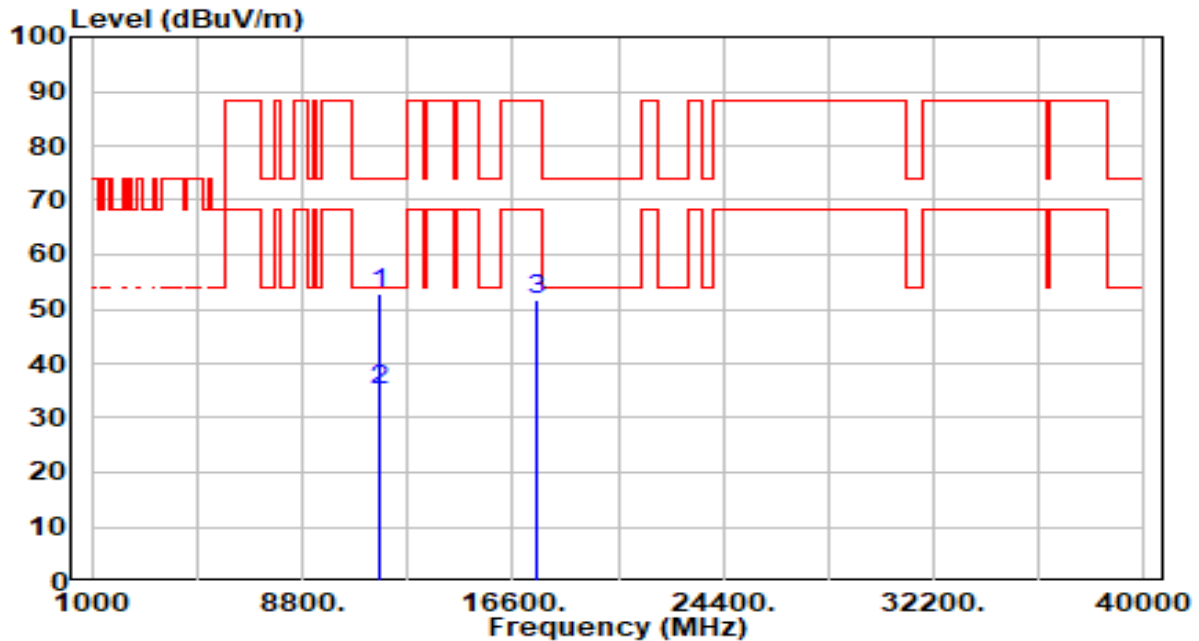


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11690.000	47.35	5.33	52.69	-21.31	74.00	100	28	Peak
2	*	11690.000	29.83	5.33	35.16	-18.84	54.00	100	28	Average
3		17535.000	46.32	5.34	51.66	-36.54	88.20	100	74	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-23
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_52Tone_RU74_Band4_TX_CH 169 ANT 0+1	Test Voltage	By Notebook PC

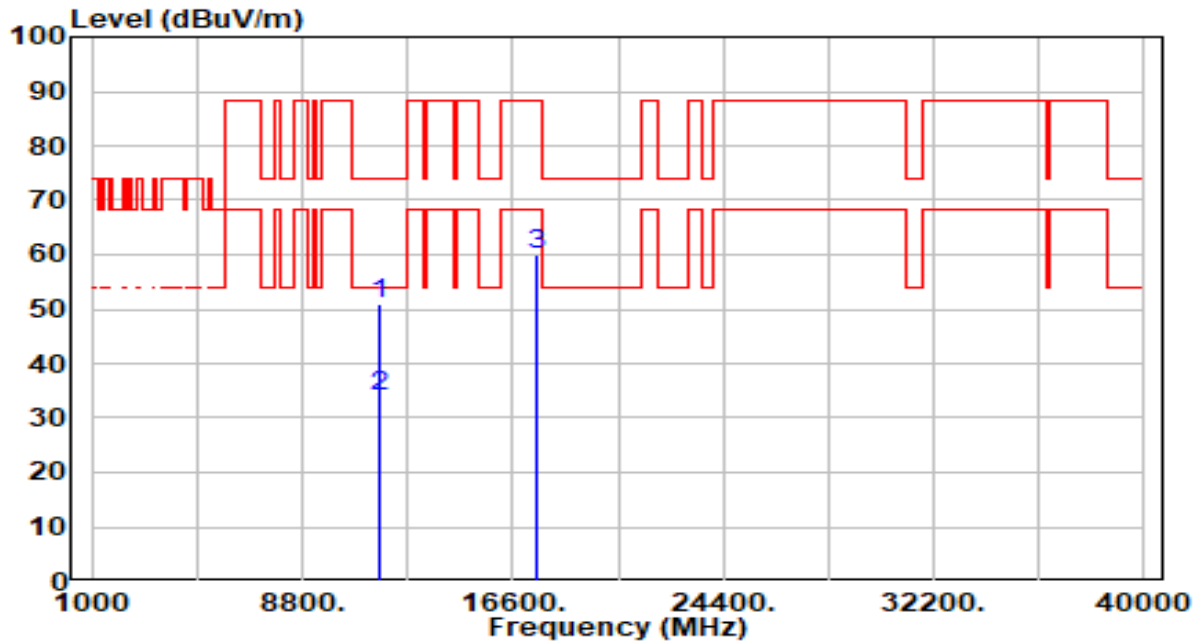


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11690.000	45.74	5.33	51.08	-22.92	74.00	100	45	Peak
2	*	11690.000	28.74	5.33	34.07	-19.93	54.00	100	45	Average
3		17535.000	54.57	5.34	59.91	-28.29	88.20	100	359	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-23
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_52Tone_RU77_Band4_TX_CH 177 ANT 0+1	Test Voltage	By Notebook PC

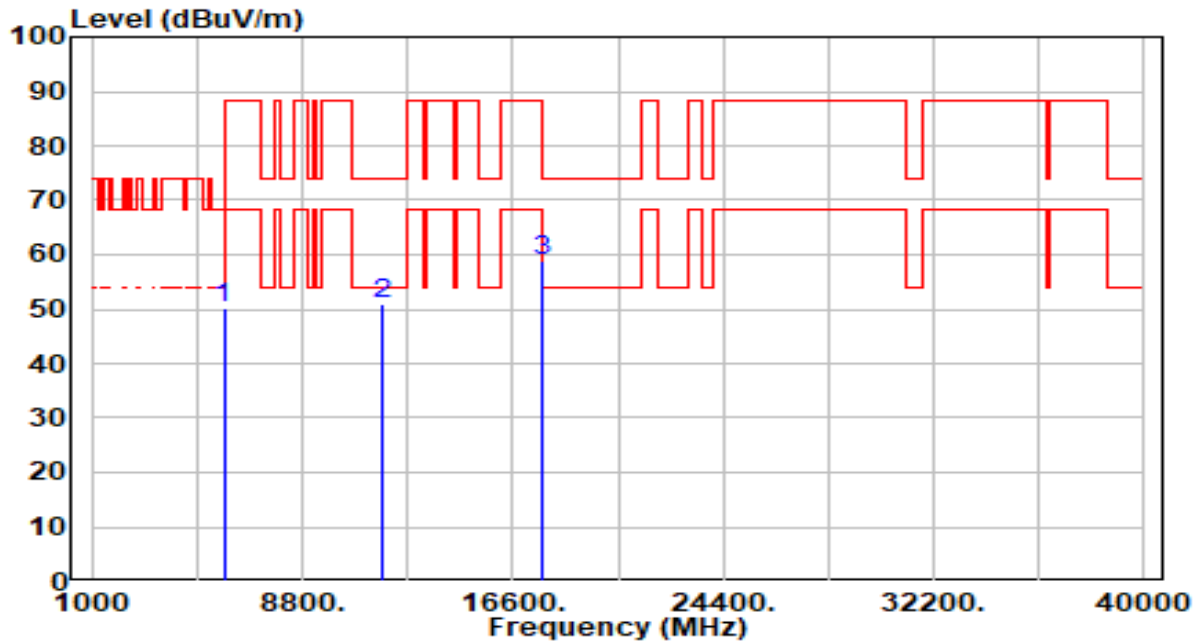


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5893.000	47.78	2.26	50.04	-18.16	68.20	100	257	Peak
2		11770.000	45.72	5.27	50.99	-23.01	74.00	100	36	Peak
3		17655.000	53.57	5.39	58.96	-29.24	88.20	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-23
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_52Tone_RU77_Band4_TX_CH 177 ANT 0+1	Test Voltage	By Notebook PC

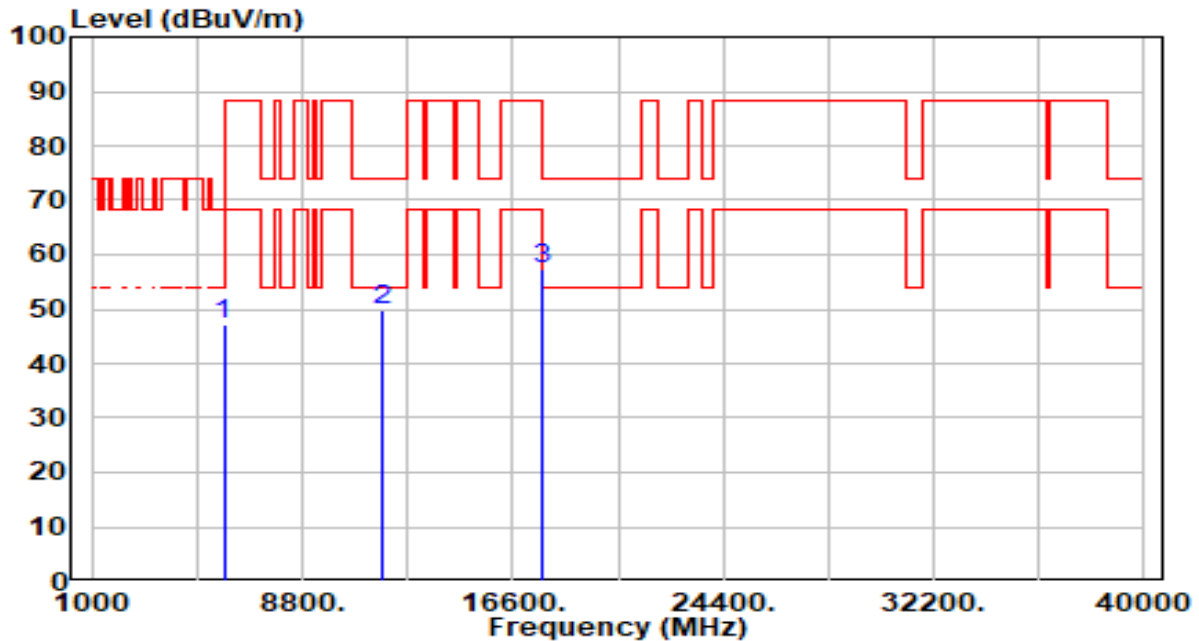


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5893.000	45.03	2.26	47.29	-20.91	68.20	100	211	Peak
2		11770.000	44.64	5.27	49.92	-24.08	74.00	100	34	Peak
3		17655.000	51.97	5.39	57.37	-30.83	88.20	100	357	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-23
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_106Tone_RU106_Band4_TX_CH 169 ANT 0+1	Test Voltage	By Notebook PC

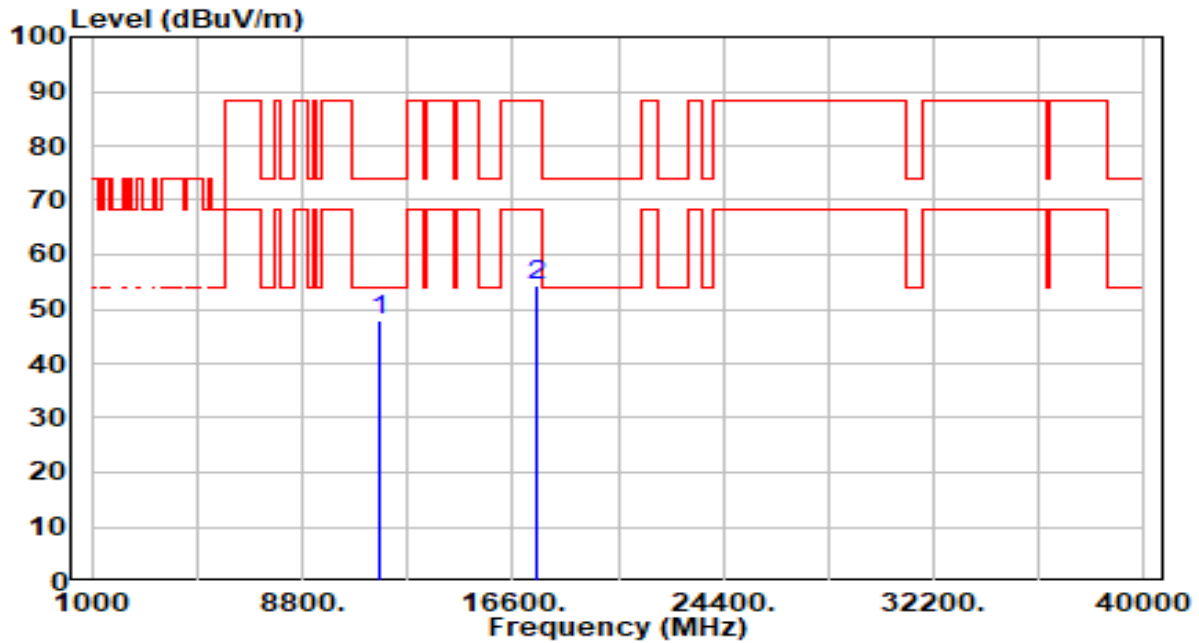


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11690.000	42.53	5.33	47.87	-26.13	74.00	100	22	Peak
2		17535.000	49.04	5.34	54.38	-33.82	88.20	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-23
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_106Tone_RU106_Band4_TX_CH 169 ANT 0+1	Test Voltage	By Notebook PC

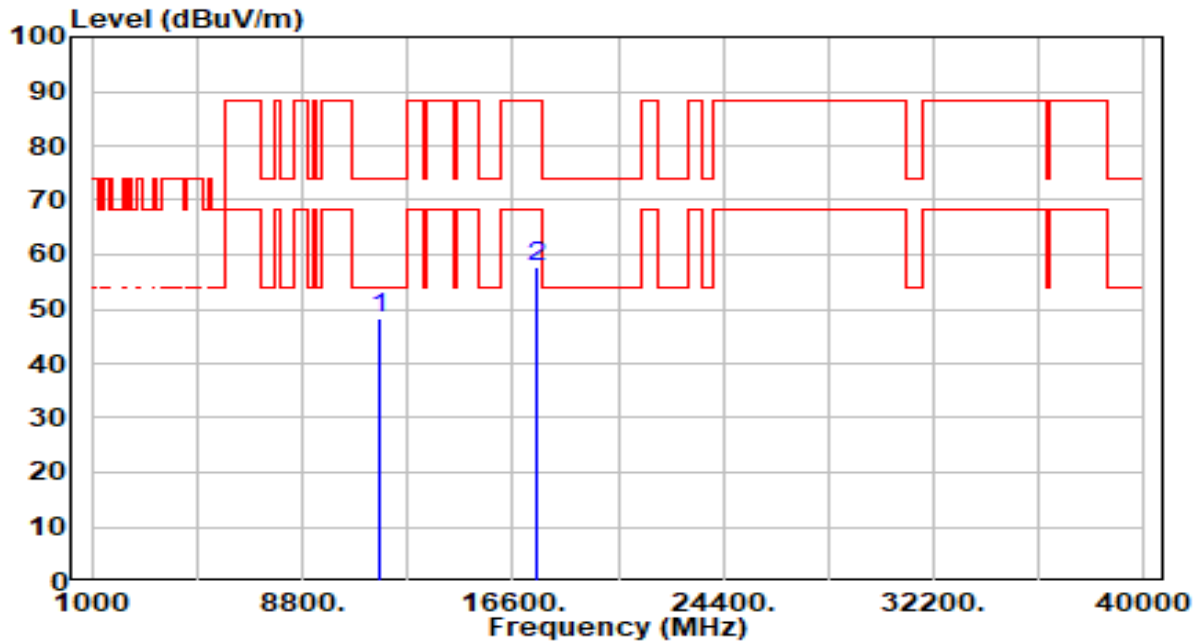


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11690.000	42.80	5.33	48.13	-25.87	74.00	100	148	Peak
2		17535.000	52.31	5.34	57.65	-30.55	88.20	100	343	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-23
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_106Tone_RU107_Band4_TX_CH 177 ANT 0+1	Test Voltage	By Notebook PC

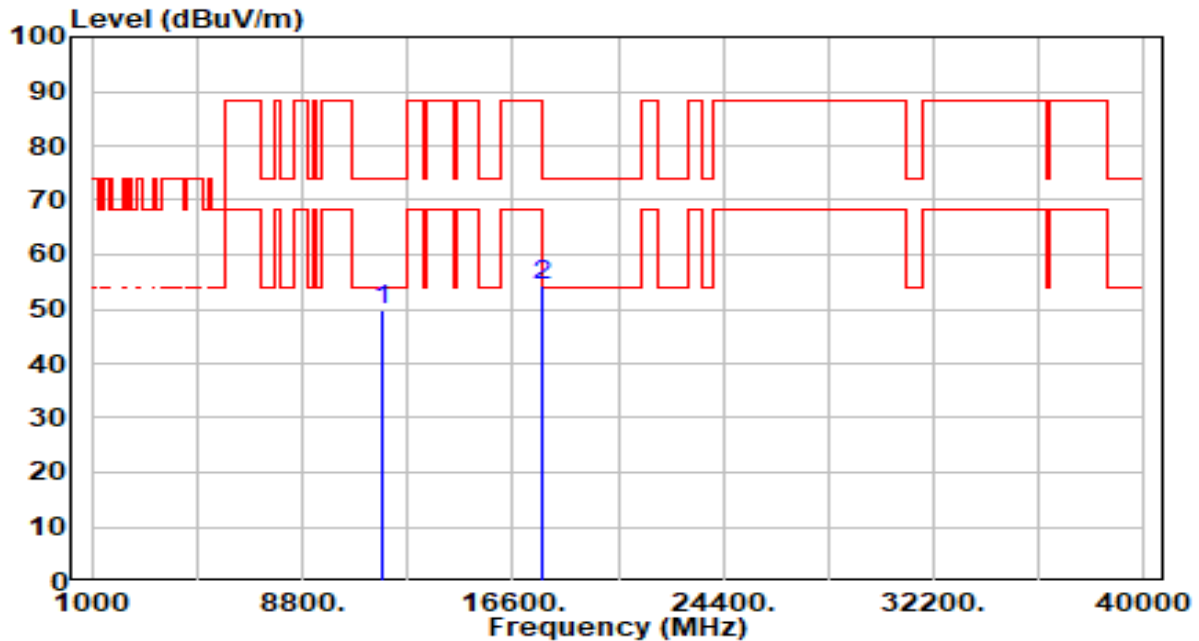


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11770.000	44.57	5.27	49.84	-24.16	74.00	100	42	Peak
2		17655.000	48.91	5.39	54.30	-33.90	88.20	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-23
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_106Tone_RU107_Band4_TX_CH 177 ANT 0+1	Test Voltage	By Notebook PC

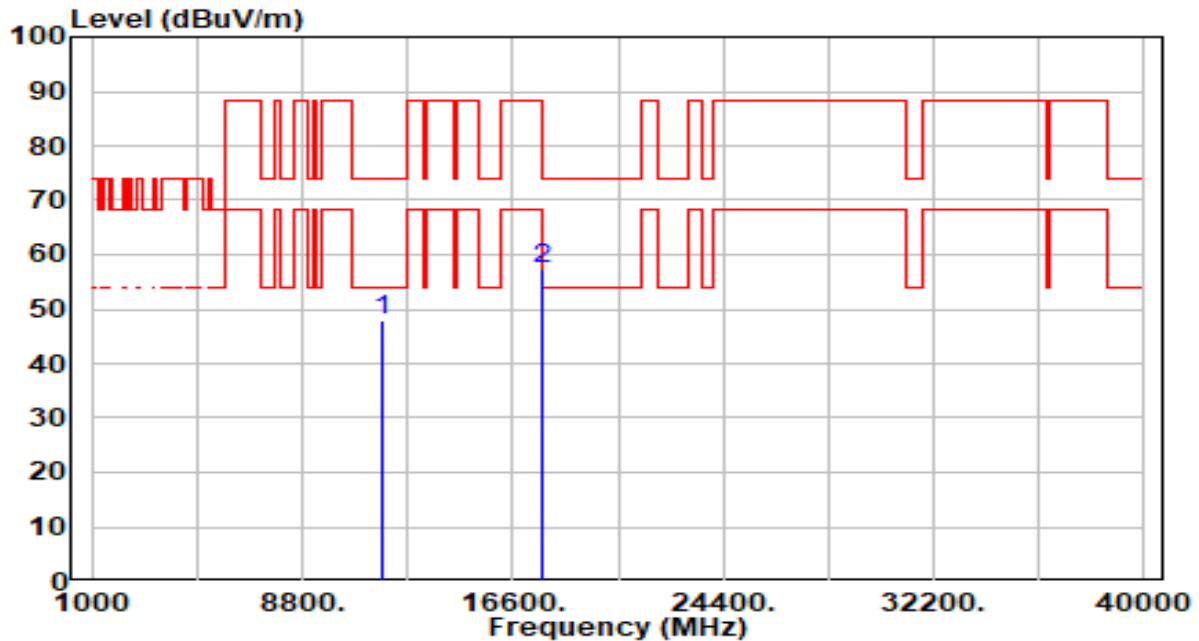


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11770.000	42.48	5.27	47.75	-26.25	74.00	100	70	Peak
2		17655.000	52.10	5.39	57.50	-30.70	88.20	0	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-23
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_242Tone_RU122_Band4_TX_CH 169 ANT 0+1	Test Voltage	By Notebook PC

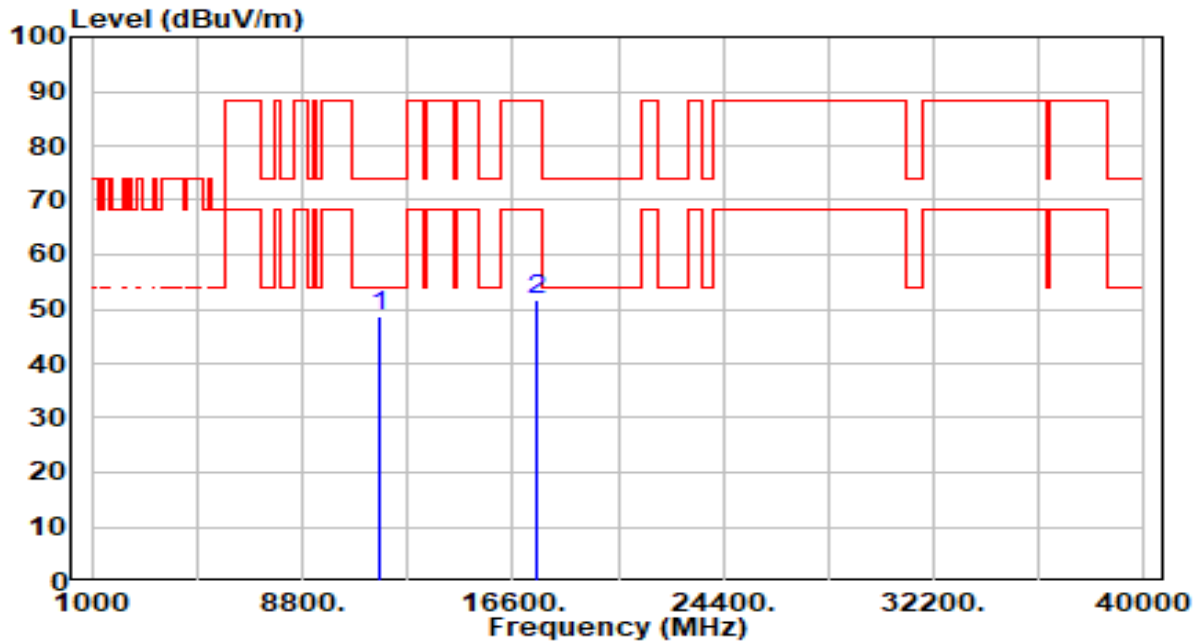


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11690.000	43.29	5.33	48.62	-25.38	74.00	100	33	Peak
2		17535.000	46.50	5.34	51.84	-36.36	88.20	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-23
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_242Tone_RU122_Band4_TX_CH 169 ANT 0+1	Test Voltage	By Notebook PC

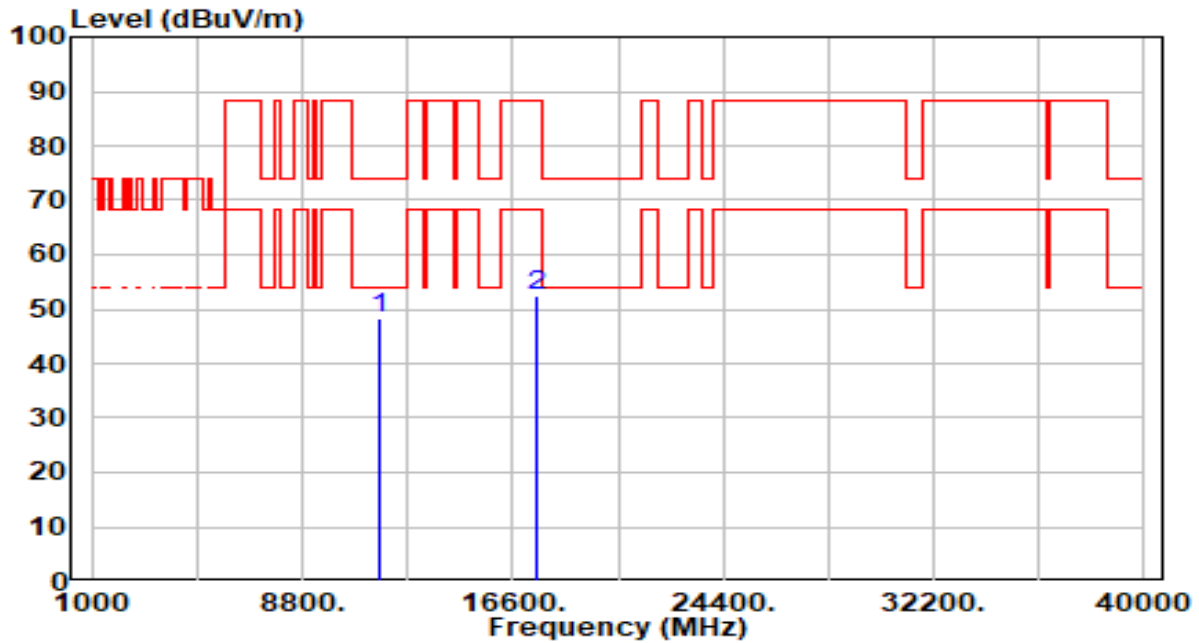


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11690.000	42.80	5.33	48.13	-25.87	74.00	100	289	Peak
2		17535.000	47.24	5.34	52.58	-35.62	88.20	0	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-23
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_242Tone_RU122_Band4_TX_CH 177 ANT 0+1	Test Voltage	By Notebook PC

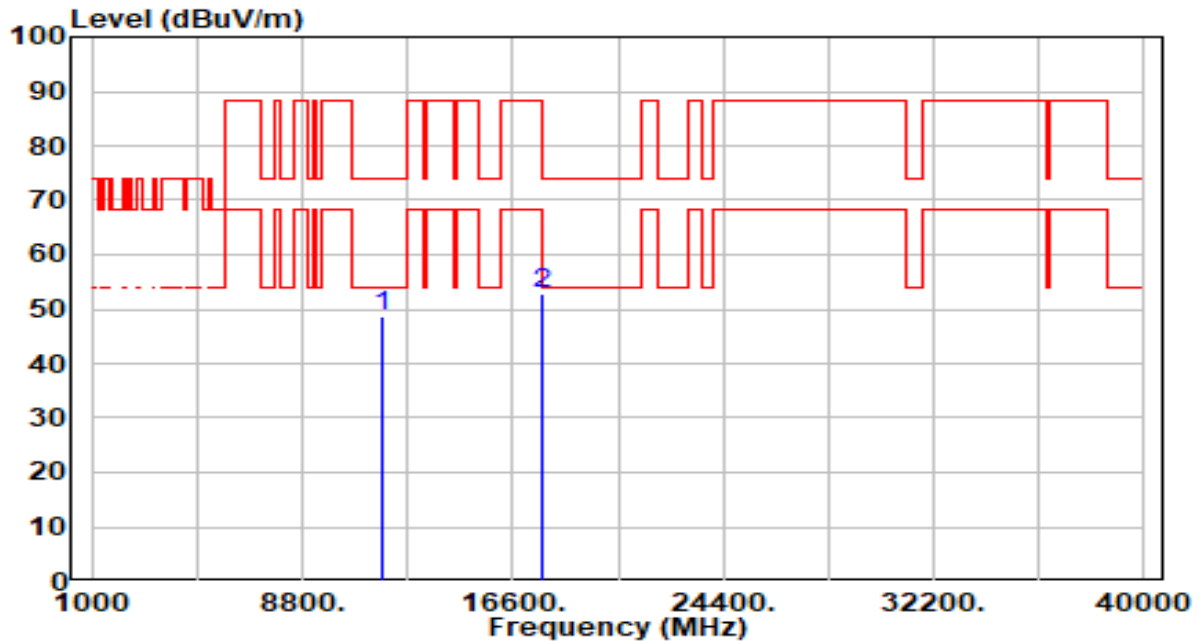


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11770.000	43.31	5.27	48.59	-25.41	74.00	100	0	Peak
2		17655.000	47.62	5.39	53.01	-35.19	88.20	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-23
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_242Tone_RU122_Band4_TX_CH 177 ANT 0+1	Test Voltage	By Notebook PC

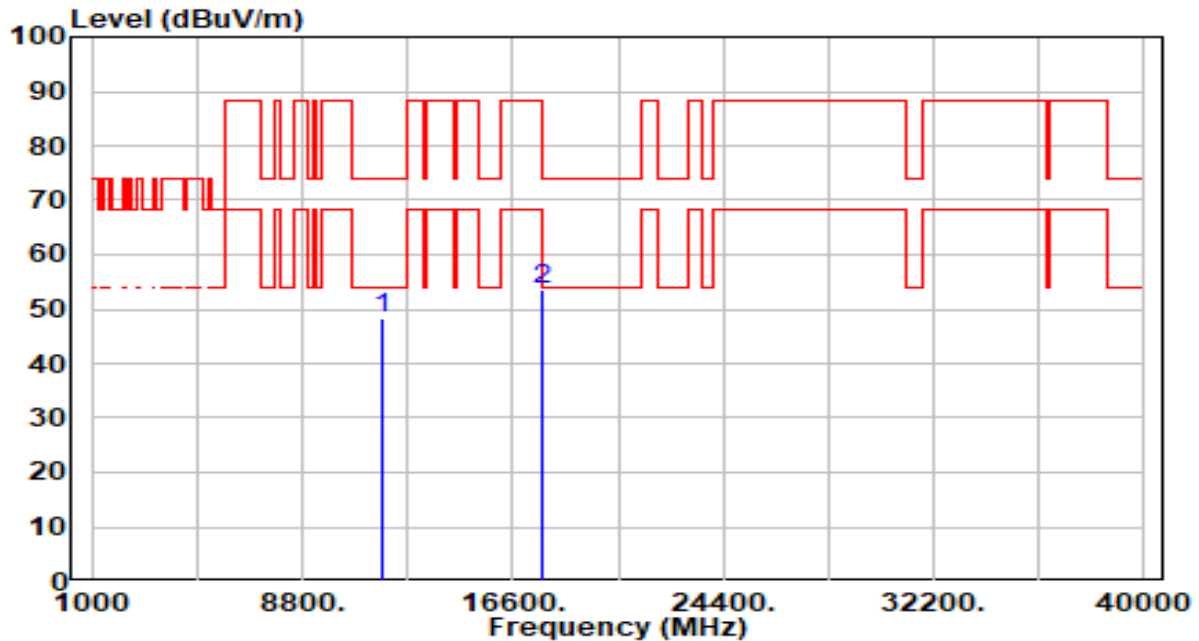


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11770.000	43.09	5.27	48.37	-25.63	74.00	100	235	Peak
2		17655.000	48.00	5.39	53.40	-34.80	88.20	100	344	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-23
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_26Tone_RU0_Band4_RX_CH 173 ANT 0+1	Test Voltage	By Notebook PC

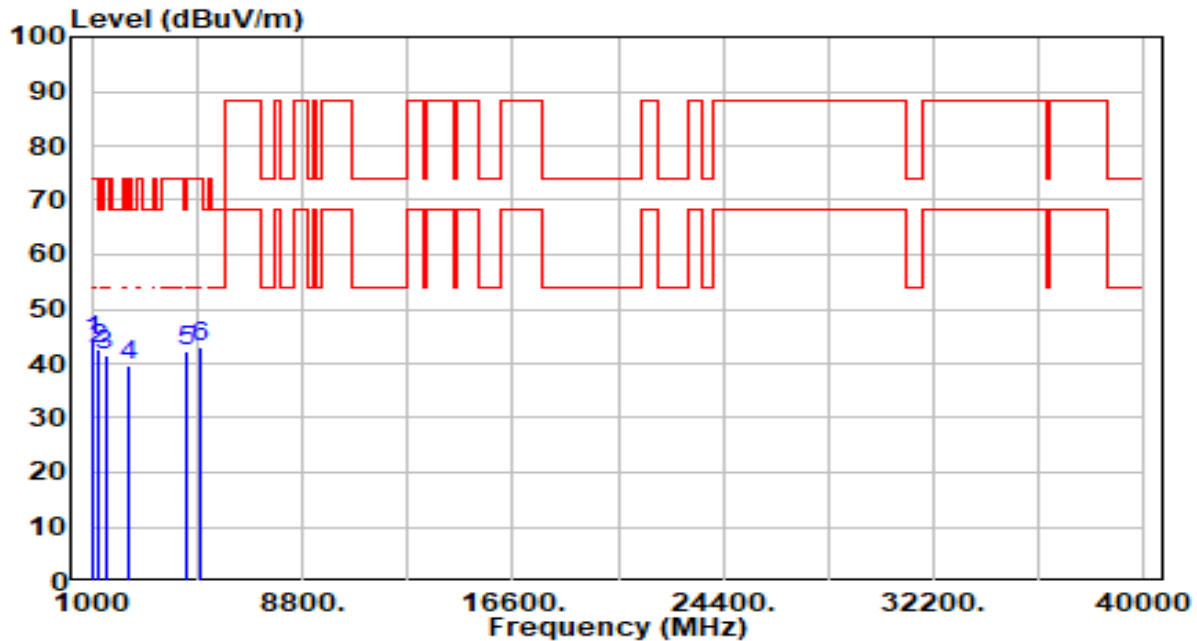


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1048.000	52.37	-8.17	44.20	-29.80	74.00	100	95	Peak
2	1199.000	50.93	-8.17	42.76	-31.24	74.00	100	110	Peak
3	1498.000	48.88	-7.51	41.37	-32.63	74.00	100	118	Peak
4	* 2397.000	44.88	-5.13	39.75	-28.45	68.20	100	239	Peak
5	4508.000	42.84	-0.52	42.32	-31.68	74.00	100	0	Peak
6	4983.000	42.22	0.65	42.86	-31.14	74.00	100	248	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-23
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_26Tone_RU0_Band4_RX_CH 173 ANT 0+1	Test Voltage	By Notebook PC

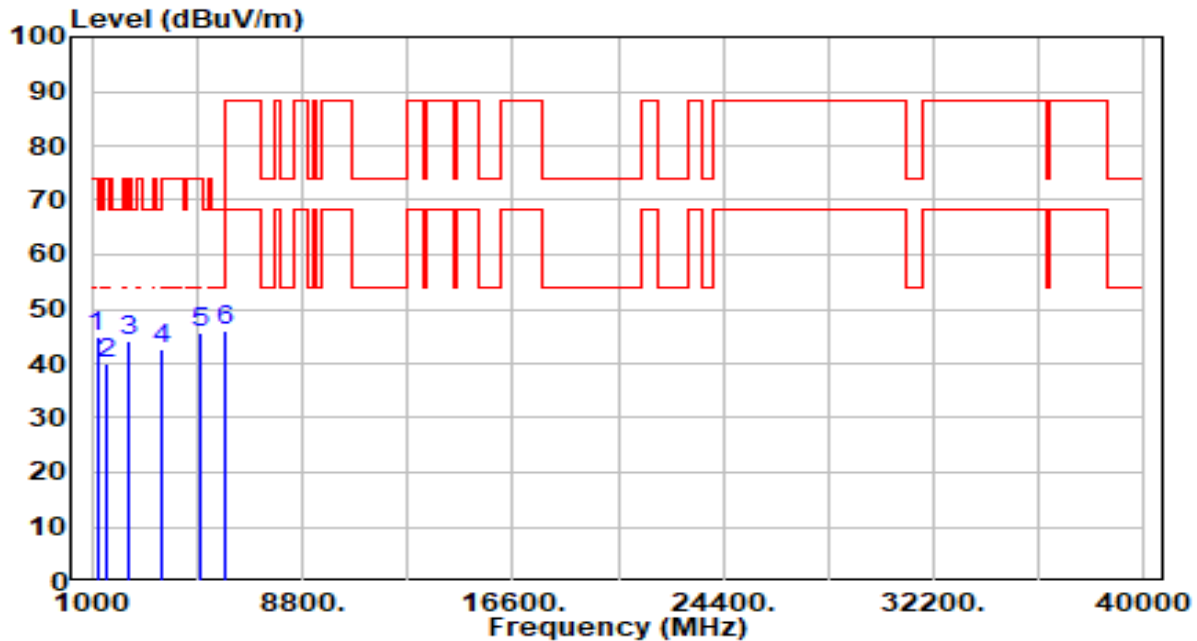

No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1195.000	52.96	-8.17	44.79	-29.21	74.00	100	254	Peak
2	1537.000	47.79	-7.61	40.18	-33.82	74.00	100	304	Peak
3	* 2397.000	49.26	-5.13	44.12	-24.08	68.20	100	275	Peak
4	3590.000	44.94	-2.37	42.57	-25.63	68.20	100	243	Peak
5	4996.000	44.91	0.68	45.59	-28.41	74.00	100	329	Peak
6	5981.000	43.89	2.23	46.12	-42.08	88.20	100	234	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.8. Radiated Restricted Band Edge Measurement

7.8.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42-16.423	399.9 - 410	4.5-5.15
¹ 0.495 - 0.505	16.69475-16.69525	608 - 614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960 - 1240	7.25-7.75
4.125-4.128	25.5 -25.67	1300 - 1427	8.025 - 8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660 - 1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123 - 138	2200 - 2300	14.47-14.5
8.291-8.294	149.9-150.05	2310 - 2390	15.35-16.2
8.362-8.366	156.52475-156.525	2483.5 - 2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690 - 2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260 - 3267	23.6-24.0
12.29-12.293	167.72-173.2	3332 - 3339	31.2-31.8
12.51975-12.52025	240 - 285	3345.8 - 3358	36.43-36.5
12.57675-12.57725	322-335.4	3600 - 4400	(²)
13.36-13.41	--	--	--

For 15.407(b) requirement:

For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

For an indoor access point, all emissions at or above 5.895GHz shall not exceed an e.i.r.p. of 15 dBm/MHz and shall decrease linearly to an e.i.r.p. of -7 dBm/MHz at or above 5.925GHz.

For indoor access point or subordinate device, all emissions below 5.725 GHz shall not exceed an e.i.r.p. of -27 dBm/MHz at 5.65 GHz increasing linearly to 10 dBm/MHz at 5.7 GHz, and from 5.7 GHz increasing linearly to a level of 15.6 dBm/MHz at 5.72 GHz, and from 5.72 GHz increasing linearly to a level of 27 dBm/MHz at 5.725 GHz.

$E \text{ [dB}\mu\text{V/m]} = \text{EIRP [dBm]} + 95.2$, for example, -27 dBm/MHz = 68.2 dB μ V/m.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.8.2.Test Procedure Used

KDB 789033 D02v02r01- Section G


7.8.3.Test Setting

Peak Measurements above 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize


Average Measurements above 1GHz (Method VB)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW If the EUT is configured to transmit with duty cycle $\geq 98\%$, set $VBW \leq RBW/100$ (i.e., 10 kHz) but not less than 10 Hz. If the EUT duty cycle is $< 98\%$, set $VBW \geq 1/T$.
4. Detector = Peak
5. Sweep time = auto
6. Allow max hold to run for at least 50 traces if the transmitted signal is continuous or has at least 98% duty cycle. For lower duty cycles, increase the minimum number of traces by a factor of $1/x$, where x is the duty cycle.

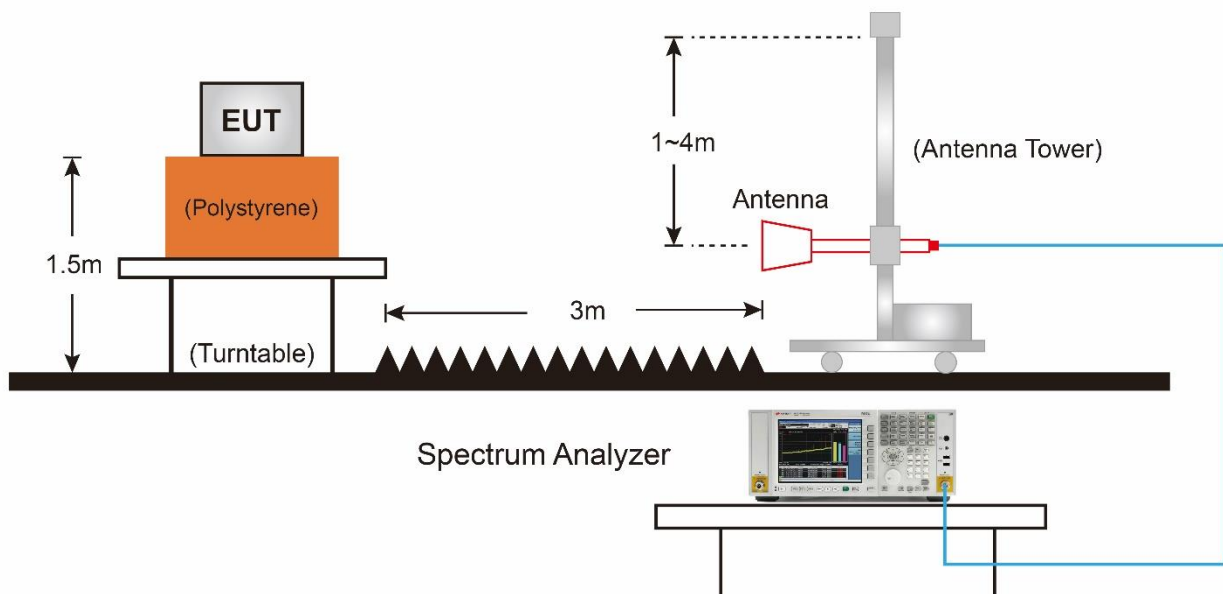7.8.4. Test Setup

7.8.5.Test Result

EUT	Mobile Computer	Date of Test	2024-07-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11a_Band4_TX_CH 169 ANT 0+1	Test Voltage	By Notebook PC

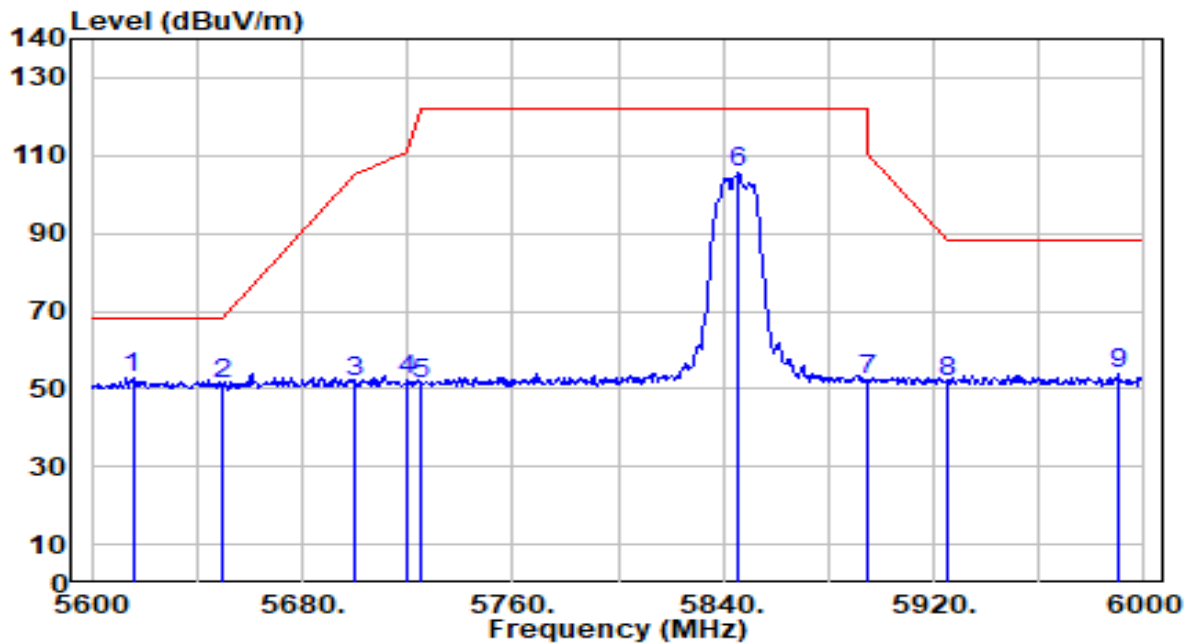


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5615.600	51.69	1.24	52.93	-15.27	68.20	140	234	Peak
2		5650.000	49.83	1.44	51.27	-16.93	68.20	140	234	Peak
3		5700.000	49.94	1.72	51.66	-53.54	105.20	140	234	Peak
4		5720.000	50.37	1.84	52.21	-58.59	110.80	140	234	Peak
5		5725.000	49.21	1.86	51.07	-71.13	122.20	140	234	Peak
6		5846.000	103.15	2.27	105.42	N/A	N/A	140	234	Peak
7		5895.000	50.04	2.26	52.30	-57.90	110.20	140	234	Peak
8		5925.000	49.36	2.25	51.61	-36.59	88.20	140	234	Peak
9		5990.000	51.57	2.22	53.79	-34.41	88.20	140	234	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preampifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11a_Band4_TX_CH 169 ANT 0+1	Test Voltage	By Notebook PC

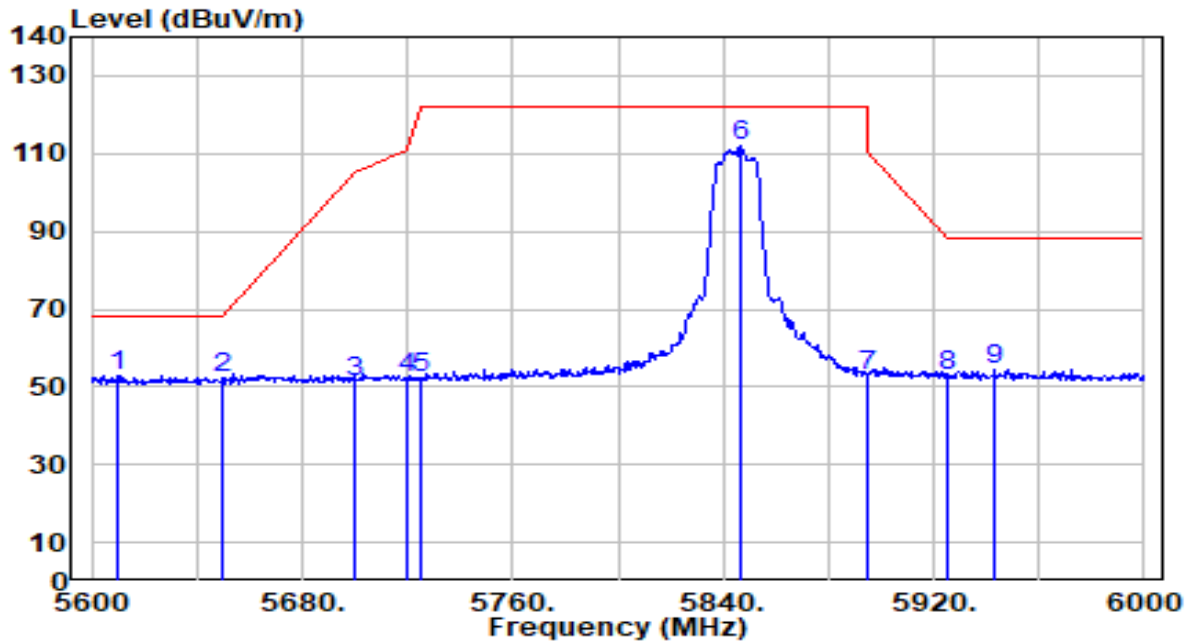


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5610.000	51.85	1.21	53.07	-15.13	68.20	119	88	Peak
2		5650.000	50.71	1.44	52.15	-16.05	68.20	119	88	Peak
3		5700.000	49.44	1.72	51.16	-54.04	105.20	119	88	Peak
4		5720.000	50.24	1.84	52.07	-58.73	110.80	119	88	Peak
5		5725.000	50.63	1.86	52.49	-69.71	122.20	119	88	Peak
6		5846.800	109.90	2.27	112.17	N/A	N/A	119	88	Peak
7		5895.000	50.62	2.26	52.88	-57.32	110.20	119	88	Peak
8		5925.000	50.68	2.25	52.92	-35.28	88.20	119	88	Peak
9		5943.200	52.09	2.24	54.33	-33.87	88.20	119	88	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11a_Band4_TX_CH 173 ANT 0+1	Test Voltage	By Notebook PC

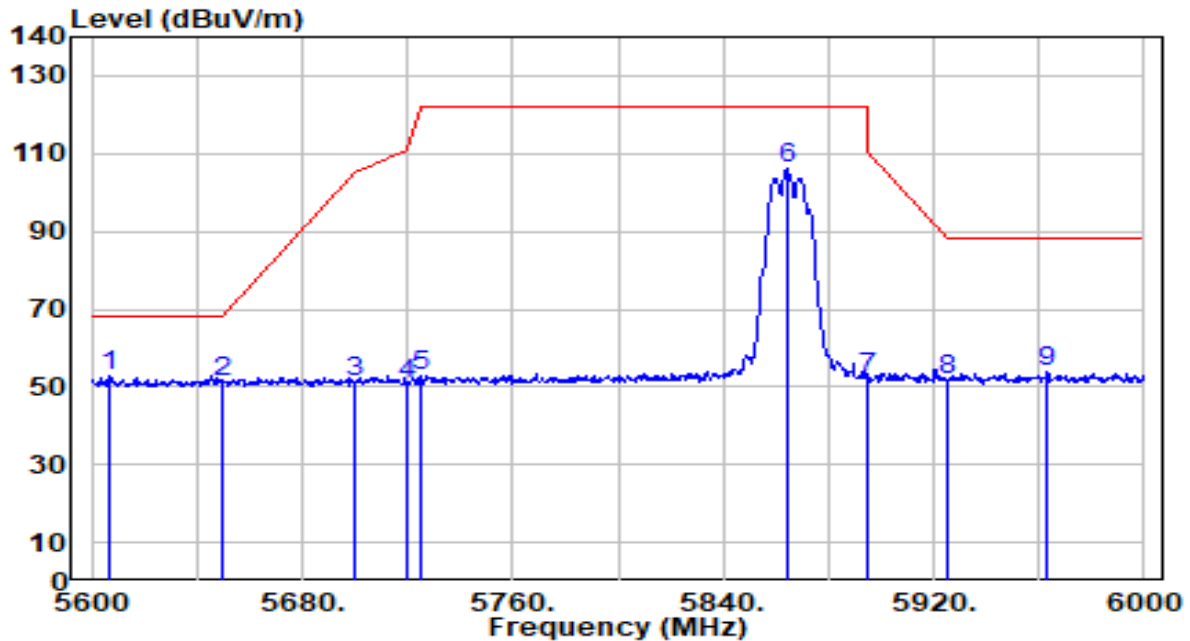


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5606.800	51.85	1.19	53.04	-15.16	68.20	102	258	Peak
2		5650.000	49.73	1.44	51.17	-17.03	68.20	102	258	Peak
3		5700.000	49.40	1.72	51.13	-54.07	105.20	102	258	Peak
4		5720.000	49.09	1.84	50.92	-59.88	110.80	102	258	Peak
5		5725.000	51.08	1.86	52.94	-69.26	122.20	102	258	Peak
6		5864.400	104.01	2.27	106.27	N/A	N/A	102	258	Peak
7		5895.000	50.06	2.26	52.31	-57.89	110.20	102	258	Peak
8		5925.000	49.72	2.25	51.97	-36.23	88.20	102	258	Peak
9		5963.200	51.90	2.23	54.13	-34.07	88.20	102	258	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11a_Band4_TX_CH 173 ANT 0+1	Test Voltage	By Notebook PC

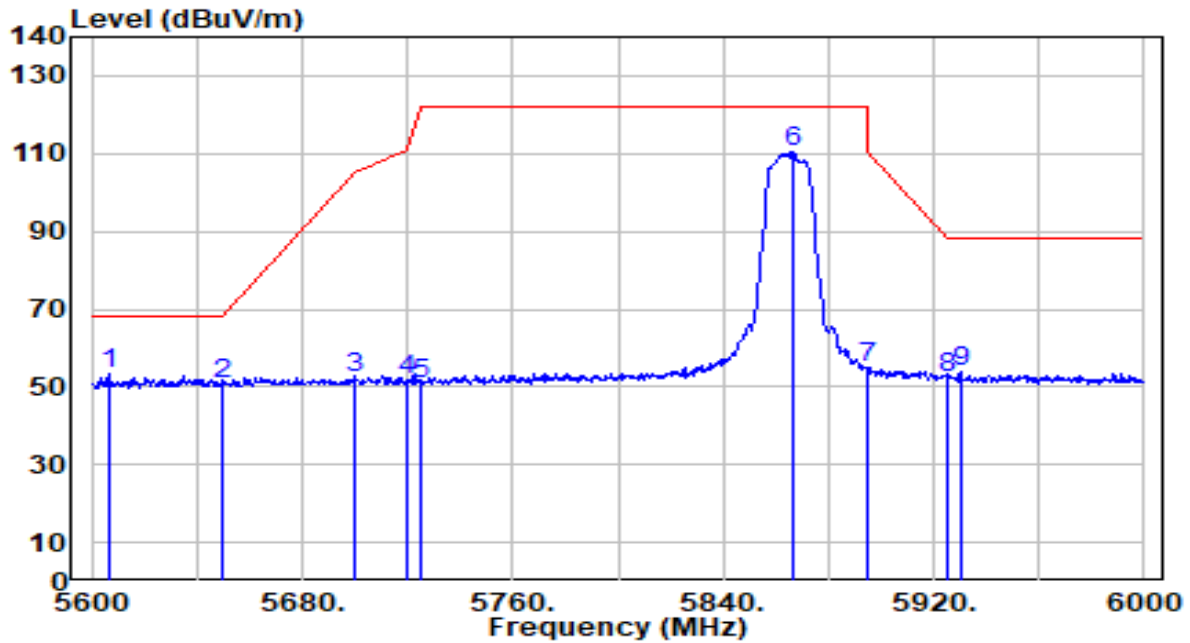


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5606.400	51.97	1.19	53.16	-15.04	68.20	100	104	Peak
2		5650.000	49.45	1.44	50.89	-17.31	68.20	100	104	Peak
3		5700.000	50.82	1.72	52.54	-52.66	105.20	100	104	Peak
4		5720.000	49.95	1.84	51.78	-59.02	110.80	100	104	Peak
5		5725.000	49.07	1.86	50.93	-71.27	122.20	100	104	Peak
6		5866.400	108.37	2.27	110.64	N/A	N/A	100	104	Peak
7		5895.000	52.63	2.26	54.88	-55.32	110.20	100	104	Peak
8		5925.000	50.19	2.25	52.44	-35.76	88.20	100	104	Peak
9		5930.000	51.74	2.24	53.99	-34.21	88.20	100	104	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11a_Band4_TX_CH 177 ANT 0+1	Test Voltage	By Notebook PC

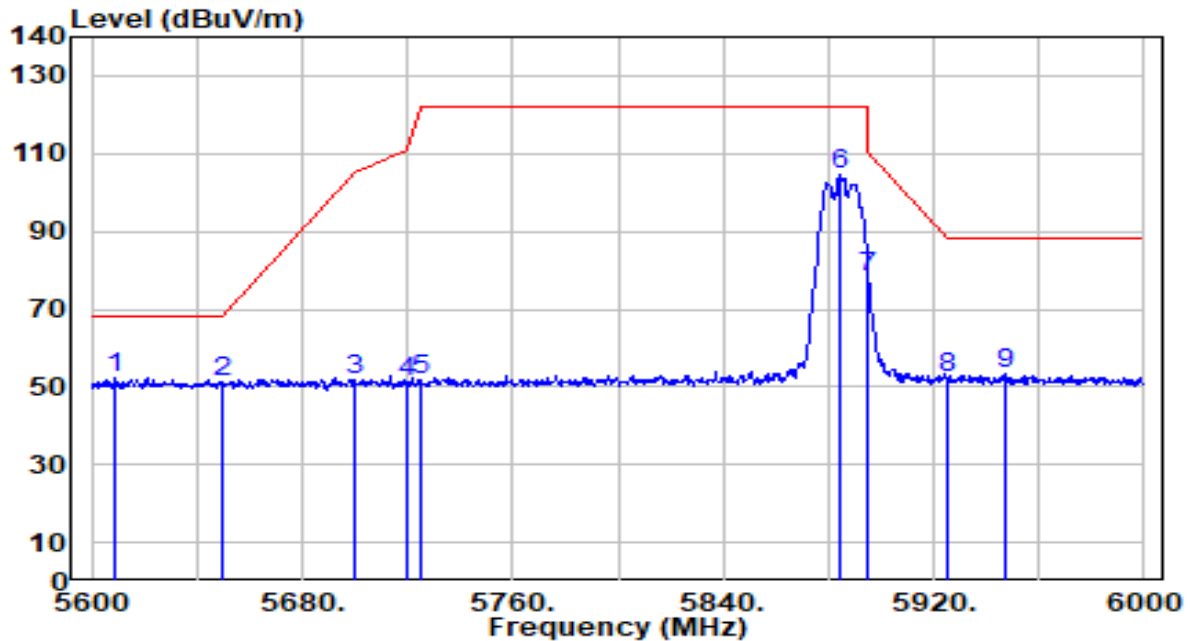


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5608.800	51.16	1.21	52.36	-15.84	68.20	110	235	Peak
2		5650.000	49.86	1.44	51.29	-16.91	68.20	110	235	Peak
3		5700.000	49.81	1.72	51.54	-53.66	105.20	110	235	Peak
4		5720.000	49.19	1.84	51.03	-59.77	110.80	110	235	Peak
5		5725.000	49.69	1.86	51.56	-70.64	122.20	110	235	Peak
6		5884.400	102.50	2.26	104.76	N/A	N/A	110	235	Peak
7		5895.000	75.90	2.26	78.15	-32.05	110.20	110	235	Peak
8		5925.000	50.31	2.25	52.56	-35.64	88.20	110	235	Peak
9		5946.800	50.91	2.24	53.15	-35.05	88.20	110	235	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11a_Band4_TX_CH 177 ANT 0+1	Test Voltage	By Notebook PC

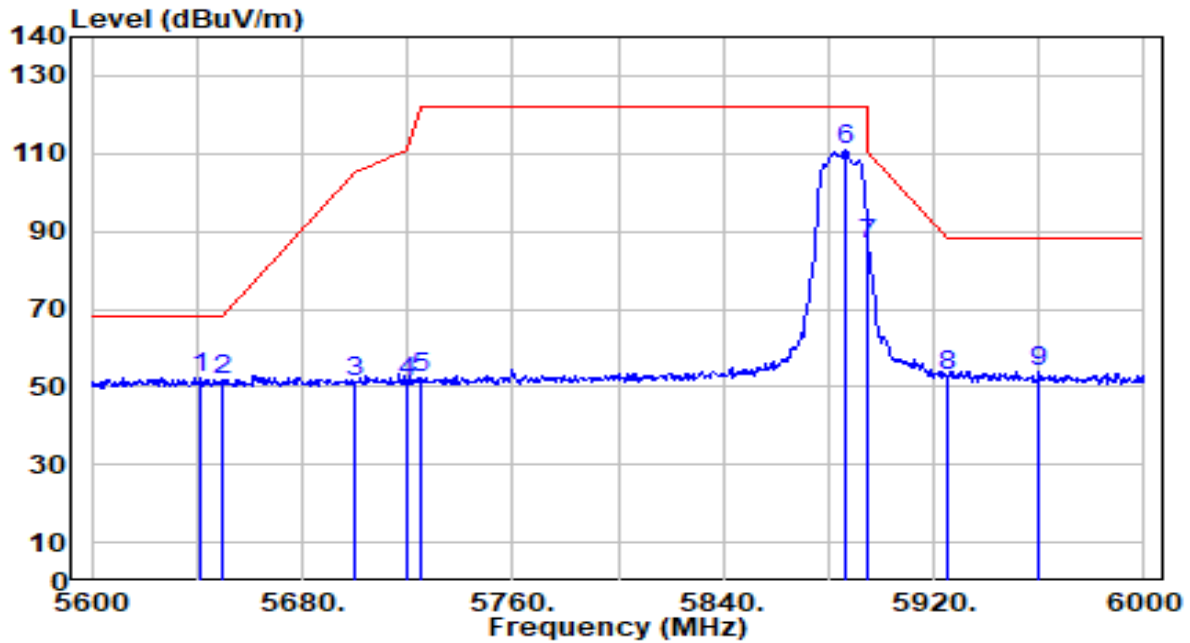


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5640.800	51.14	1.39	52.52	-15.68	68.20	116	91	Peak
2		5650.000	50.60	1.44	52.03	-16.17	68.20	116	91	Peak
3		5700.000	49.27	1.72	50.99	-54.21	105.20	116	91	Peak
4		5720.000	49.45	1.84	51.28	-59.52	110.80	116	91	Peak
5		5725.000	50.24	1.86	52.10	-70.10	122.20	116	91	Peak
6		5886.400	108.84	2.26	111.10	N/A	N/A	116	91	Peak
7		5895.000	84.60	2.26	86.85	-23.35	110.20	116	91	Peak
8		5925.000	50.59	2.25	52.84	-35.36	88.20	116	91	Peak
9		5960.000	51.73	2.23	53.96	-34.24	88.20	116	91	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-20MHz_Band4_TX_CH 169 ANT 0+1	Test Voltage	By Notebook PC

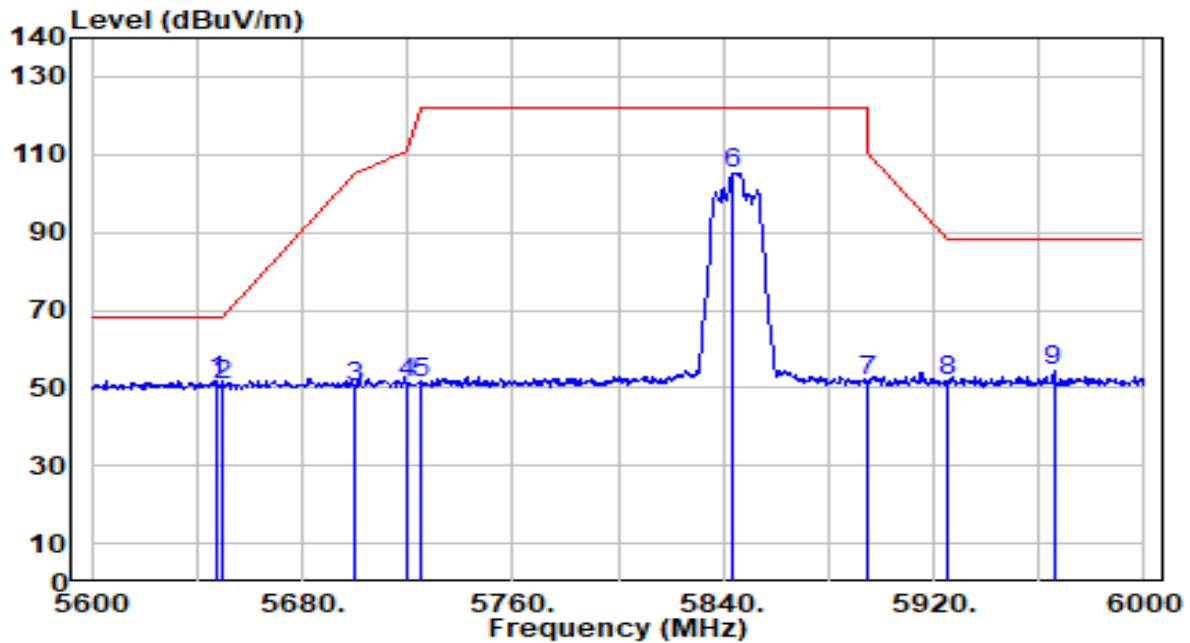


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5647.600	50.41	1.43	51.84	-16.36	68.20	106	254	Peak
2		5650.000	49.22	1.44	50.66	-17.54	68.20	106	254	Peak
3		5700.000	48.68	1.72	50.40	-54.80	105.20	106	254	Peak
4		5720.000	49.40	1.84	51.24	-59.56	110.80	106	254	Peak
5		5725.000	49.29	1.86	51.15	-71.05	122.20	106	254	Peak
6		5844.000	103.11	2.27	105.38	N/A	N/A	106	254	Peak
7		5895.000	49.56	2.26	51.81	-58.39	110.20	106	254	Peak
8		5925.000	49.36	2.25	51.61	-36.59	88.20	106	254	Peak
9		5965.600	52.20	2.23	54.43	-33.77	88.20	106	254	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(1dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-20MHz_Band4_TX_CH 169 ANT 0+1	Test Voltage	By Notebook PC

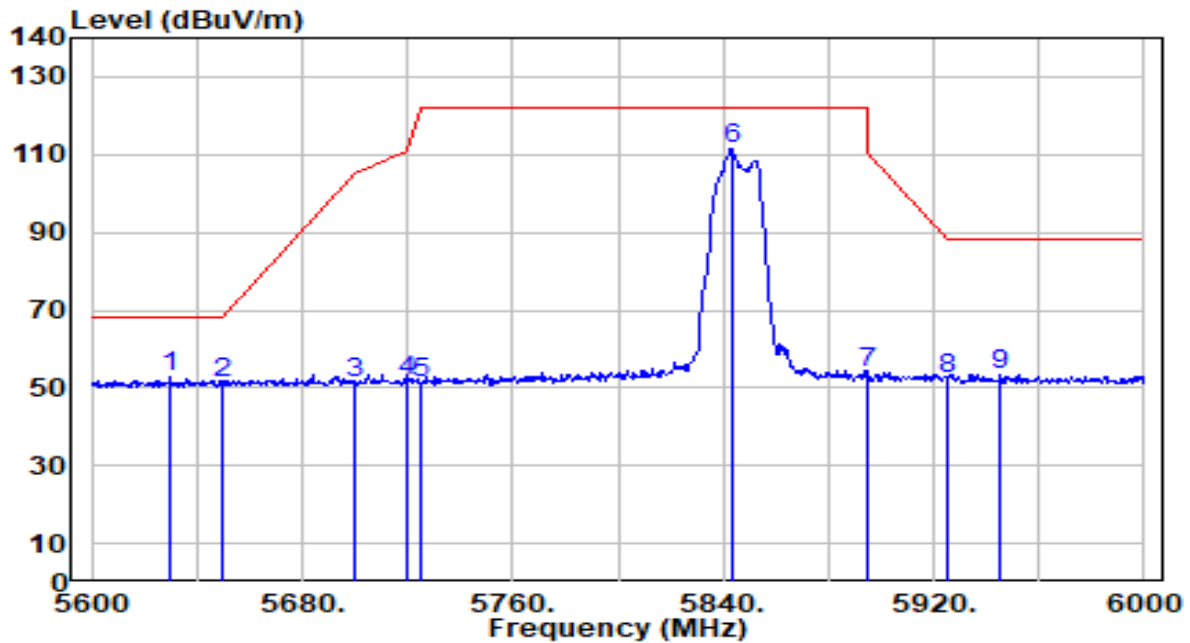


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5629.600	51.26	1.32	52.59	-15.61	68.20	112	209	Peak
2		5650.000	49.76	1.44	51.20	-17.00	68.20	112	209	Peak
3		5700.000	49.61	1.72	51.33	-53.87	105.20	112	209	Peak
4		5720.000	50.18	1.84	52.01	-58.79	110.80	112	209	Peak
5		5725.000	49.21	1.86	51.08	-71.12	122.20	112	209	Peak
6		5843.600	109.06	2.27	111.33	N/A	N/A	112	209	Peak
7		5895.000	51.88	2.26	54.13	-56.07	110.20	112	209	Peak
8		5925.000	49.98	2.25	52.23	-35.97	88.20	112	209	Peak
9		5945.200	51.18	2.24	53.42	-34.78	88.20	112	209	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preampifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-20MHz_Band4_TX_CH 173 ANT 0+1	Test Voltage	By Notebook PC

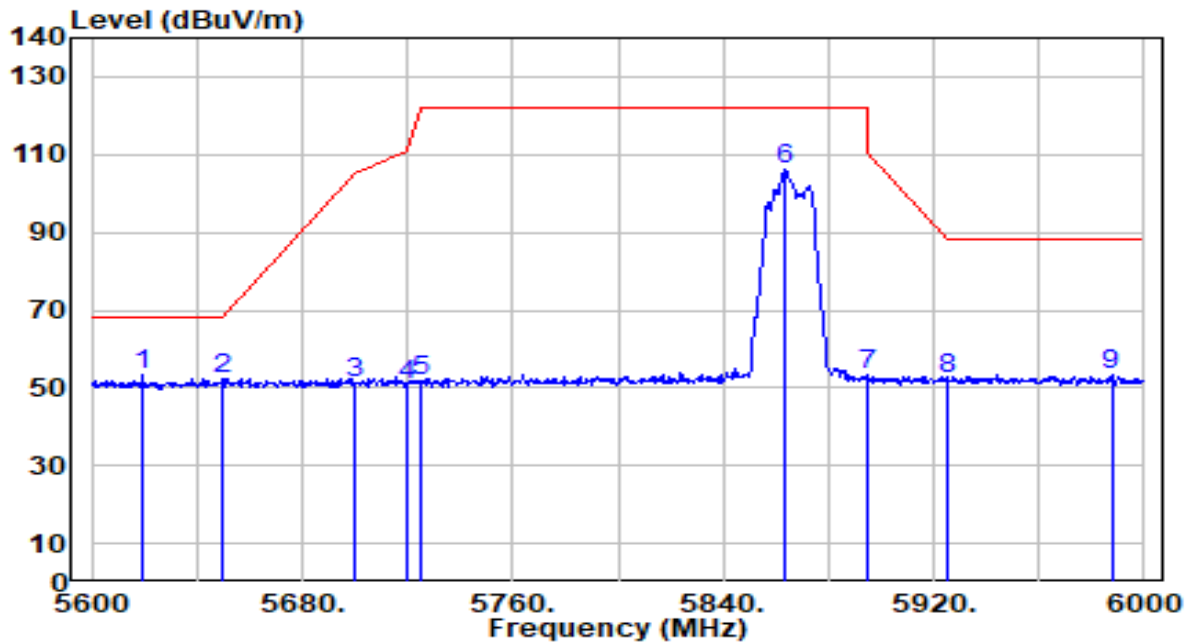


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5619.200	51.96	1.26	53.22	-14.98	68.20	114	246	Peak
2		5650.000	50.75	1.44	52.18	-16.02	68.20	114	246	Peak
3		5700.000	49.37	1.72	51.09	-54.11	105.20	114	246	Peak
4		5720.000	48.83	1.84	50.67	-60.13	110.80	114	246	Peak
5		5725.000	49.81	1.86	51.67	-70.53	122.20	114	246	Peak
6		5863.600	103.77	2.27	106.04	N/A	N/A	114	246	Peak
7		5895.000	51.25	2.26	53.50	-56.70	110.20	114	246	Peak
8		5925.000	49.87	2.25	52.12	-36.08	88.20	114	246	Peak
9		5987.600	51.37	2.22	53.59	-34.61	88.20	114	246	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-20MHz_Band4_TX_CH 173 ANT 0+1	Test Voltage	By Notebook PC

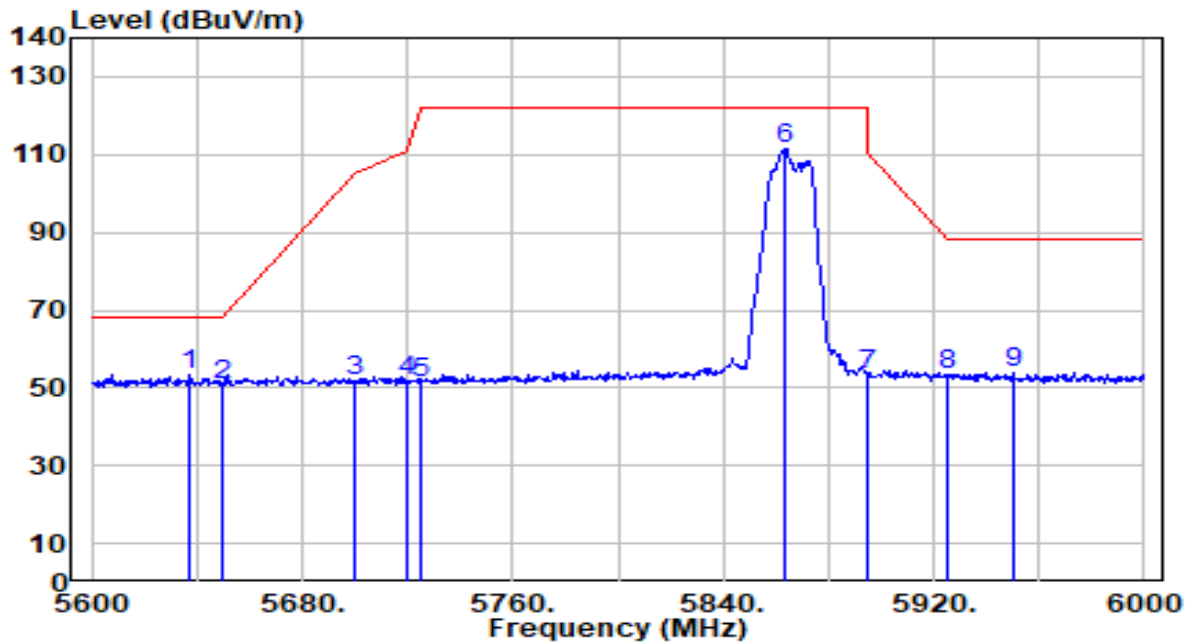


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5637.200	52.01	1.37	53.37	-14.83	68.20	108	209	Peak
2		5650.000	49.34	1.44	50.78	-17.42	68.20	108	209	Peak
3		5700.000	49.81	1.72	51.53	-53.67	105.20	108	209	Peak
4		5720.000	49.92	1.84	51.75	-59.05	110.80	108	209	Peak
5		5725.000	49.57	1.86	51.43	-70.77	122.20	108	209	Peak
6		5863.600	109.27	2.27	111.54	N/A	N/A	108	209	Peak
7		5895.000	51.11	2.26	53.36	-56.84	110.20	108	209	Peak
8		5925.000	51.09	2.25	53.34	-34.86	88.20	108	209	Peak
9		5950.400	51.69	2.24	53.92	-34.28	88.20	108	209	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-20MHz_Band4_TX_CH 177 ANT 0+1	Test Voltage	By Notebook PC

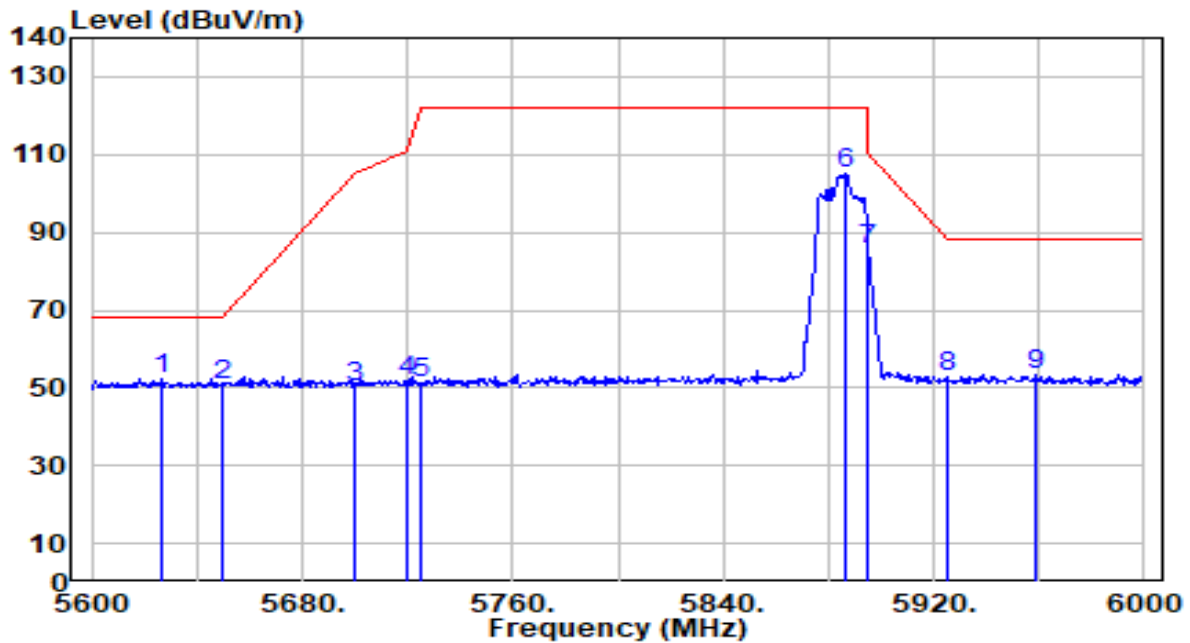


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5626.800	51.01	1.31	52.32	-15.88	68.20	136	234	Peak
2		5650.000	49.19	1.44	50.63	-17.57	68.20	136	234	Peak
3		5700.000	48.68	1.72	50.41	-54.79	105.20	136	234	Peak
4		5720.000	49.76	1.84	51.60	-59.20	110.80	136	234	Peak
5		5725.000	49.23	1.86	51.09	-71.11	122.20	136	234	Peak
6		5886.400	102.84	2.26	105.09	N/A	N/A	136	234	Peak
7		5895.000	83.11	2.26	85.37	-24.83	110.20	136	234	Peak
8		5925.000	50.45	2.25	52.69	-35.51	88.20	136	234	Peak
9		5958.800	51.31	2.23	53.54	-34.66	88.20	136	234	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-20MHz_Band4_TX_CH 177 ANT 0+1	Test Voltage	By Notebook PC

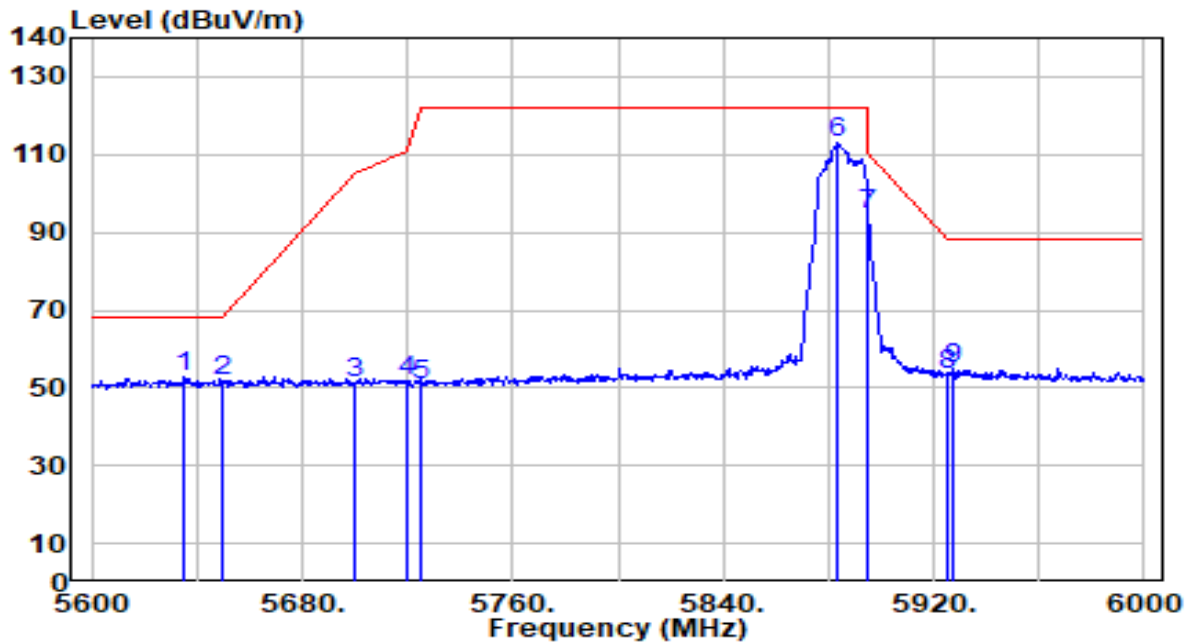


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5635.200	51.52	1.36	52.88	-15.32	68.20	134	252	Peak
2		5650.000	50.14	1.44	51.58	-16.62	68.20	134	252	Peak
3		5700.000	49.75	1.72	51.47	-53.73	105.20	134	252	Peak
4		5720.000	49.84	1.84	51.67	-59.13	110.80	134	252	Peak
5		5725.000	48.94	1.86	50.80	-71.40	122.20	134	252	Peak
6		5883.600	110.58	2.26	112.84	N/A	N/A	134	252	Peak
7		5895.000	92.53	2.26	94.79	-15.41	110.20	134	252	Peak
8		5925.000	51.36	2.25	53.61	-34.59	88.20	134	252	Peak
9		5927.200	52.58	2.24	54.83	-33.37	88.20	134	252	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preampifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-40MHz_Band4_TX_CH 167 ANT 0+1	Test Voltage	By Notebook PC

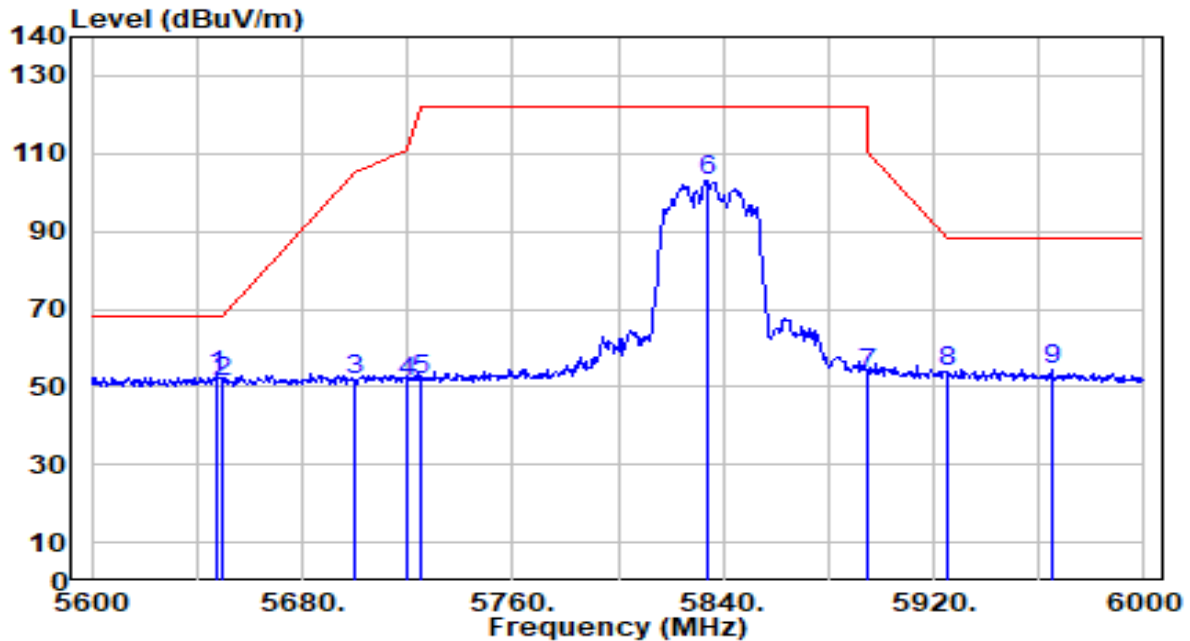


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5647.600	51.25	1.43	52.68	-15.52	68.20	125	311	Peak
2		5650.000	49.86	1.44	51.30	-16.90	68.20	125	311	Peak
3		5700.000	49.90	1.72	51.62	-53.58	105.20	125	311	Peak
4		5720.000	49.55	1.84	51.39	-59.41	110.80	125	311	Peak
5		5725.000	49.77	1.86	51.64	-70.56	122.20	125	311	Peak
6		5833.600	100.96	2.28	103.24	N/A	N/A	125	311	Peak
7		5895.000	51.22	2.26	53.48	-56.72	110.20	125	311	Peak
8		5925.000	51.79	2.25	54.03	-34.17	88.20	125	311	Peak
9		5964.800	52.37	2.23	54.60	-33.60	88.20	125	311	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(1dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-40MHz_Band4_TX_CH 167 ANT 0+1	Test Voltage	By Notebook PC

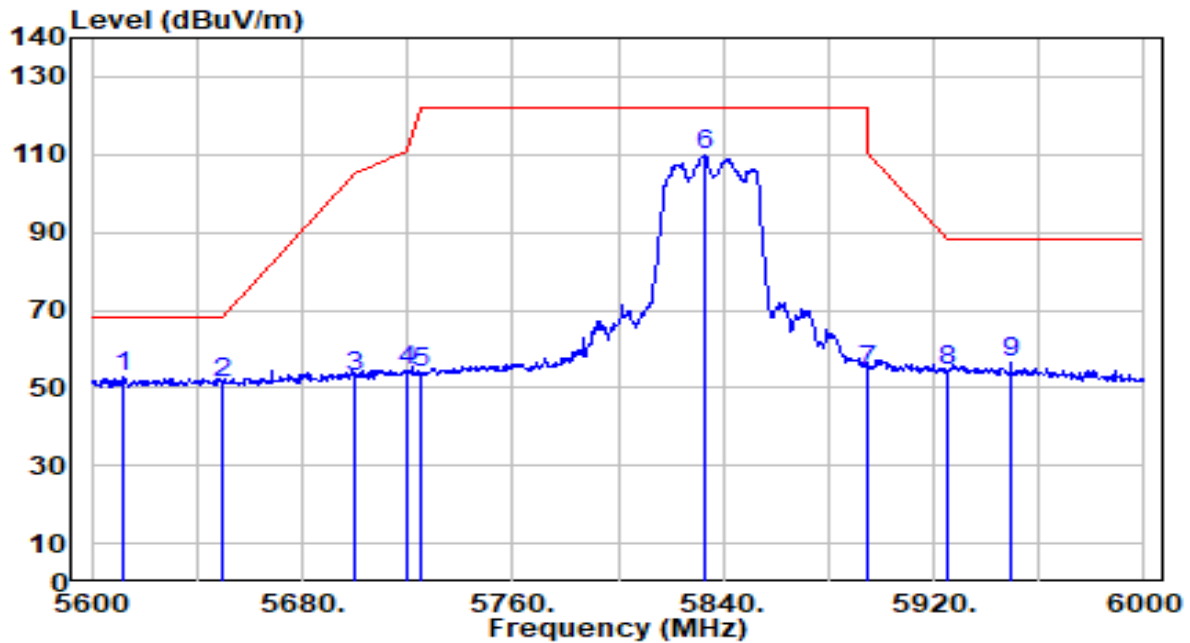


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5611.600	51.53	1.22	52.75	-15.45	68.20	188	212	Peak
2		5650.000	49.82	1.44	51.26	-16.94	68.20	188	212	Peak
3		5700.000	51.11	1.72	52.83	-52.37	105.20	188	212	Peak
4		5720.000	52.35	1.84	54.18	-56.62	110.80	188	212	Peak
5		5725.000	51.87	1.86	53.73	-68.47	122.20	188	212	Peak
6		5833.200	107.53	2.28	109.80	N/A	N/A	188	212	Peak
7		5895.000	52.36	2.26	54.61	-55.59	110.20	188	212	Peak
8		5925.000	52.00	2.25	54.25	-33.95	88.20	188	212	Peak
9		5949.200	54.04	2.24	56.28	-31.92	88.20	188	212	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-40MHz_Band4_TX_CH 175 ANT 0+1	Test Voltage	By Notebook PC

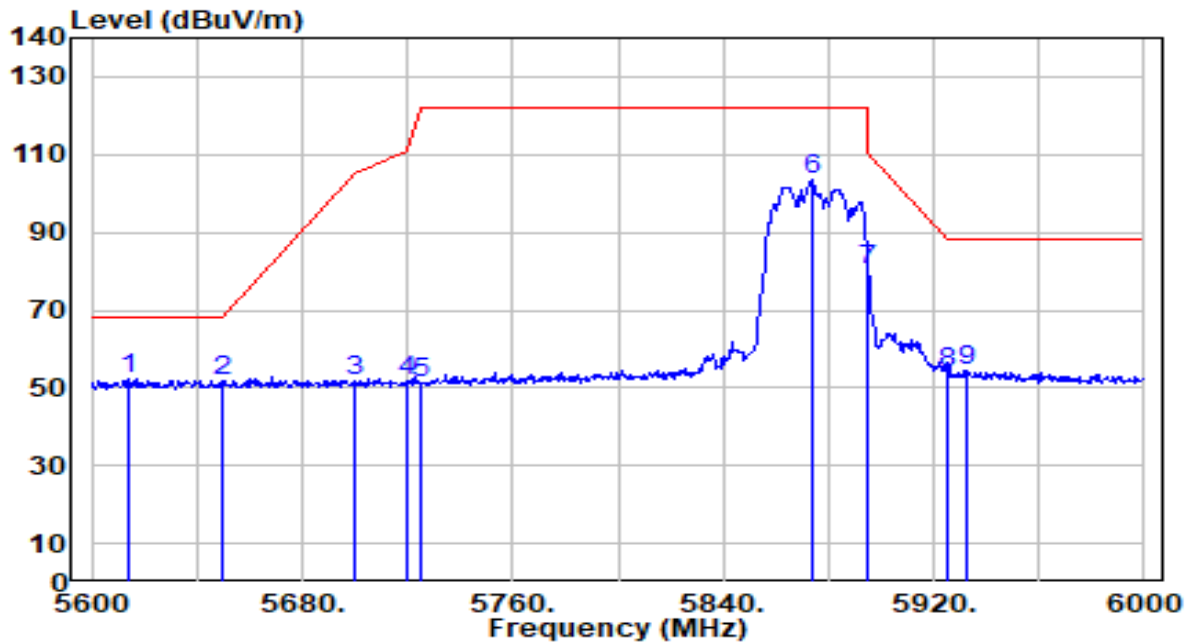


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5613.600	50.93	1.23	52.16	-16.04	68.20	101	249	Peak
2		5650.000	50.07	1.44	51.51	-16.69	68.20	101	249	Peak
3		5700.000	50.30	1.72	52.02	-53.18	105.20	101	249	Peak
4		5720.000	50.10	1.84	51.94	-58.86	110.80	101	249	Peak
5		5725.000	49.55	1.86	51.41	-70.79	122.20	101	249	Peak
6		5873.600	101.16	2.26	103.43	N/A	N/A	101	249	Peak
7		5895.000	78.06	2.26	80.32	-29.88	110.20	101	249	Peak
8		5925.000	51.86	2.25	54.10	-34.10	88.20	101	249	Peak
9		5932.800	52.33	2.24	54.58	-33.62	88.20	101	249	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-40MHz_Band4_TX_CH 175 ANT 0+1	Test Voltage	By Notebook PC

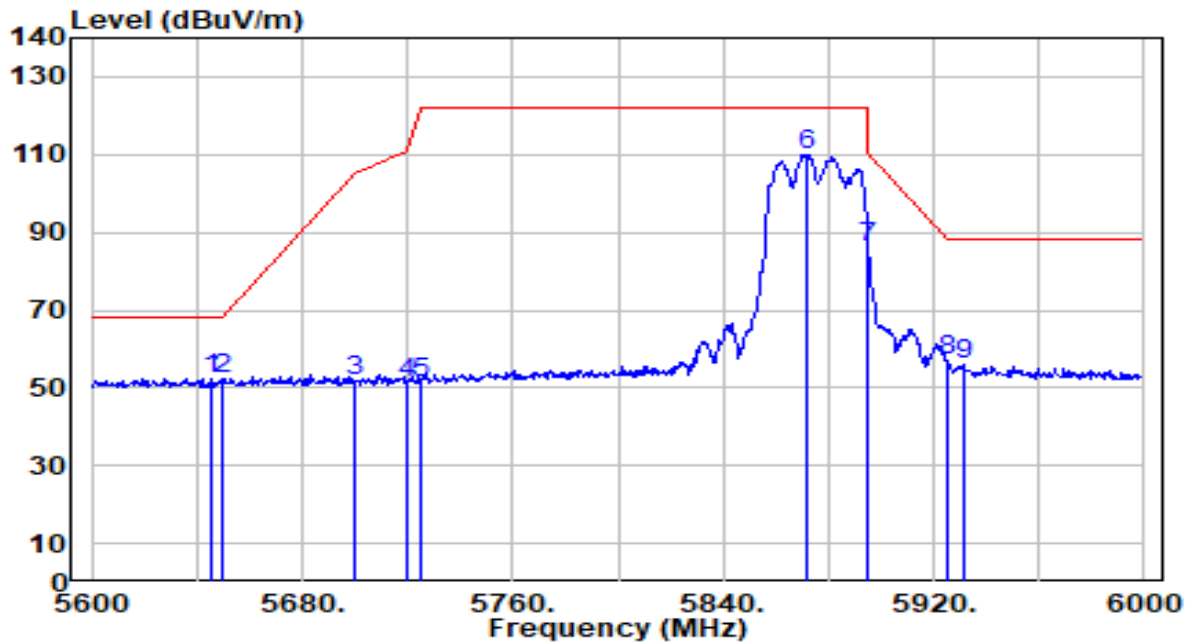


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5645.200	51.04	1.41	52.45	-15.75	68.20	104	213	Peak
2		5650.000	50.78	1.44	52.22	-15.98	68.20	104	213	Peak
3		5700.000	50.01	1.72	51.73	-53.47	105.20	104	213	Peak
4		5720.000	49.61	1.84	51.45	-59.35	110.80	104	213	Peak
5		5725.000	49.39	1.86	51.25	-70.95	122.20	104	213	Peak
6		5872.000	107.79	2.26	110.05	N/A	N/A	104	213	Peak
7		5895.000	83.65	2.26	85.90	-24.30	110.20	104	213	Peak
8		5925.000	54.58	2.25	56.83	-31.37	88.20	104	213	Peak
9		5931.600	53.75	2.24	56.00	-32.20	88.20	104	213	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-80MHz_Band4_TX_CH 171 ANT 0+1	Test Voltage	By Notebook PC

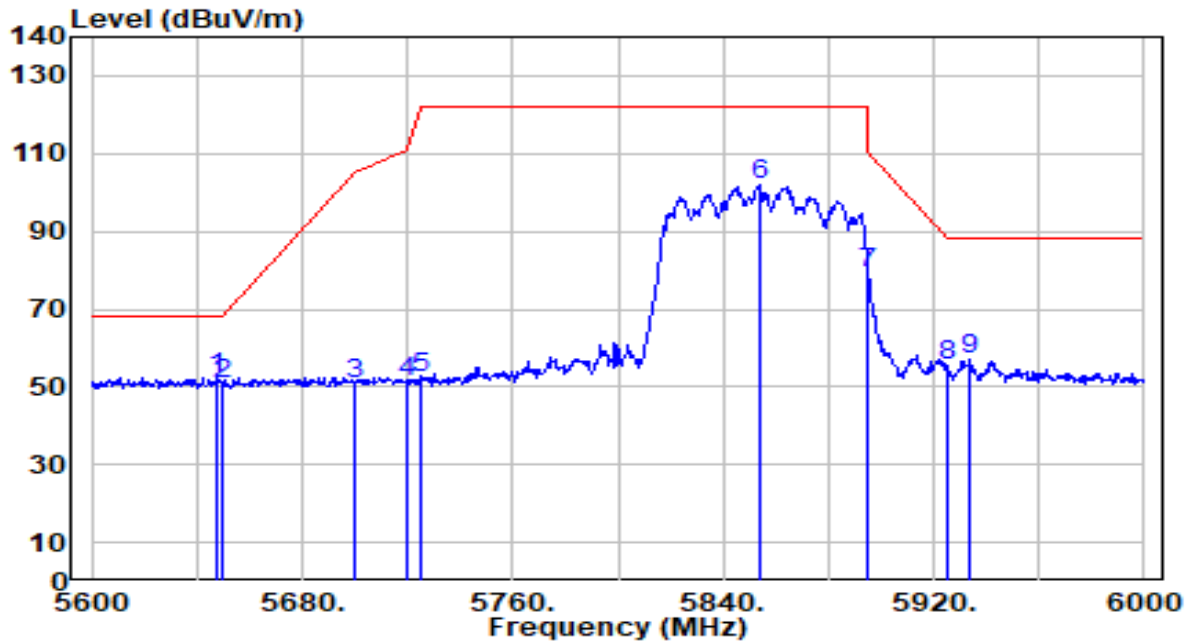


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5647.200	51.13	1.42	52.56	-15.64	68.20	109	244	Peak
2		5650.000	49.31	1.44	50.75	-17.45	68.20	109	244	Peak
3		5700.000	49.20	1.72	50.92	-54.28	105.20	109	244	Peak
4		5720.000	49.48	1.84	51.32	-59.48	110.80	109	244	Peak
5		5725.000	50.60	1.86	52.46	-69.74	122.20	109	244	Peak
6		5853.600	99.50	2.27	101.77	N/A	N/A	109	244	Peak
7		5895.000	76.80	2.26	79.05	-31.15	110.20	109	244	Peak
8		5925.000	52.98	2.25	55.22	-32.98	88.20	109	244	Peak
9		5933.600	54.78	2.24	57.02	-31.18	88.20	109	244	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-80MHz_Band4_TX_CH 175 ANT 0+1	Test Voltage	By Notebook PC

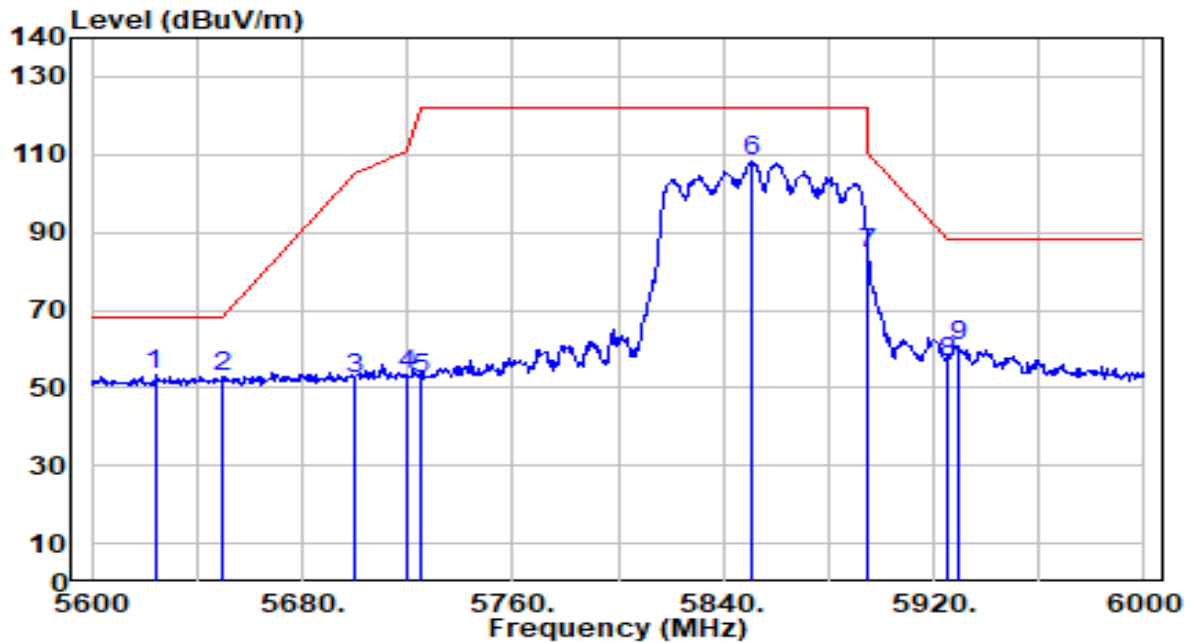


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5624.000	51.82	1.29	53.11	-15.09	68.20	121	217	Peak
2		5650.000	51.14	1.44	52.58	-15.62	68.20	121	217	Peak
3		5700.000	50.64	1.72	52.36	-52.84	105.20	121	217	Peak
4		5720.000	51.46	1.84	53.30	-57.50	110.80	121	217	Peak
5		5725.000	50.58	1.86	52.44	-69.76	122.20	121	217	Peak
6		5850.400	105.84	2.27	108.11	N/A	N/A	121	217	Peak
7		5895.000	82.52	2.26	84.78	-25.42	110.20	121	217	Peak
8		5925.000	54.02	2.25	56.27	-31.93	88.20	121	217	Peak
9		5929.200	58.62	2.24	60.86	-27.34	88.20	121	217	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preampifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-160MHz_Band4_TX_CH 163 ANT 0+1 SN:865D_PW:16	Test Voltage	By Notebook PC

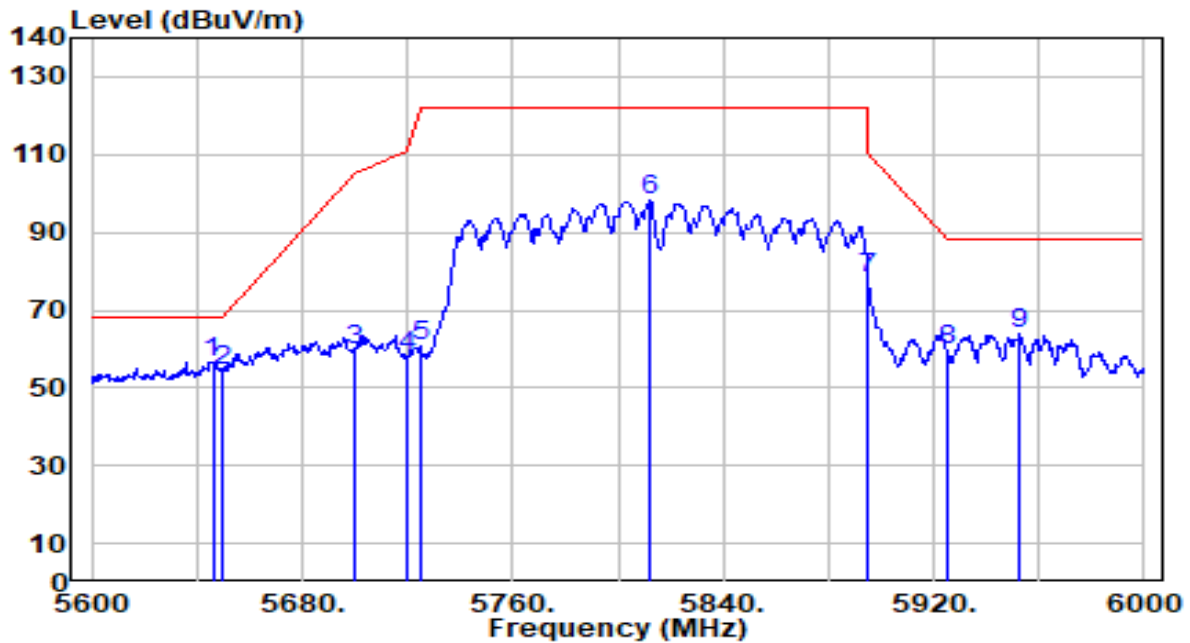


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5646.000	55.09	1.42	56.50	-11.70	68.20	101	254	Peak
2		5650.000	53.23	1.44	54.67	-13.53	68.20	101	254	Peak
3		5700.000	57.98	1.72	59.71	-45.49	105.20	101	254	Peak
4		5720.000	56.41	1.84	58.24	-52.56	110.80	101	254	Peak
5		5725.000	59.15	1.86	61.01	-61.19	122.20	101	254	Peak
6		5812.400	95.75	2.28	98.04	N/A	N/A	101	254	Peak
7		5895.000	75.67	2.26	77.93	-32.27	110.20	101	254	Peak
8		5925.000	57.69	2.25	59.94	-28.26	88.20	101	254	Peak
9		5952.400	61.66	2.24	63.89	-24.31	88.20	101	254	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ac-160MHz_Band4_TX_CH 163 ANT 0+1 SN:865D_PW:16	Test Voltage	By Notebook PC

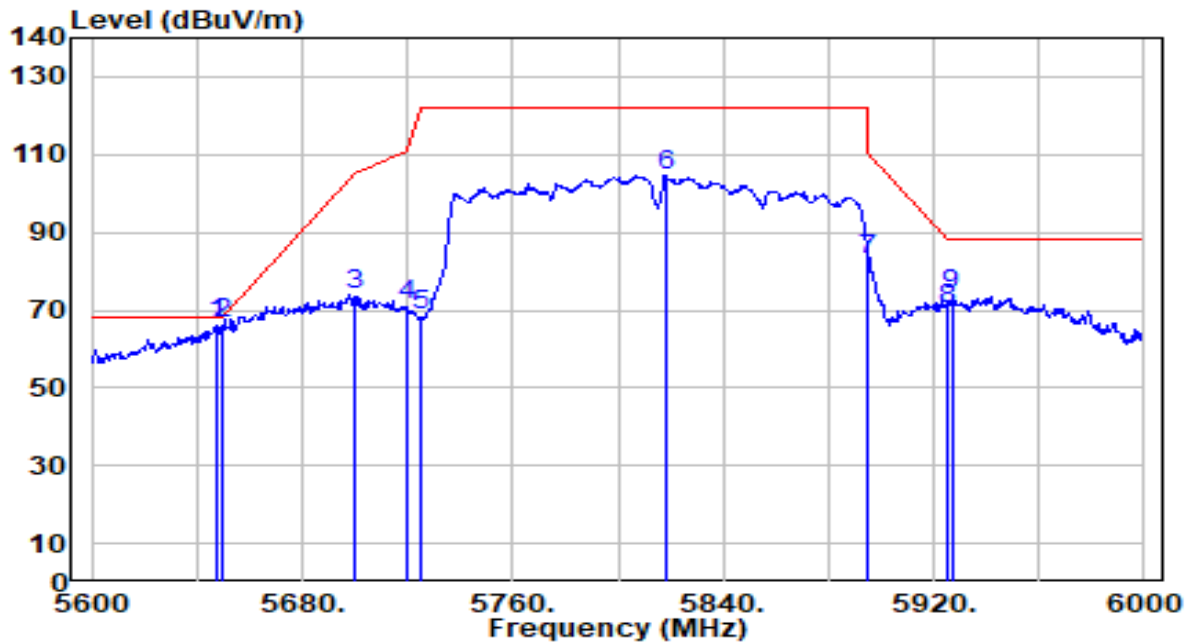


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5647.600	65.09	1.43	66.52	-1.68	68.20	115	90	Peak
2	* 5650.000	65.26	1.44	66.70	-1.50	68.20	115	90	Peak
3	5700.000	71.98	1.72	73.70	-31.50	105.20	115	90	Peak
4	5720.000	69.23	1.84	71.06	-39.74	110.80	115	90	Peak
5	5725.000	66.98	1.86	68.84	-53.36	122.20	115	90	Peak
6	5818.000	102.26	2.28	104.55	N/A	N/A	115	90	Peak
7	5895.000	80.62	2.26	82.88	-27.32	110.20	115	90	Peak
8	5925.000	68.06	2.25	70.30	-17.90	88.20	115	90	Peak
9	5926.800	71.53	2.24	73.78	-14.42	88.20	115	90	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preampifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_Band4_TX_CH 169 ANT 0+1	Test Voltage	By Notebook PC

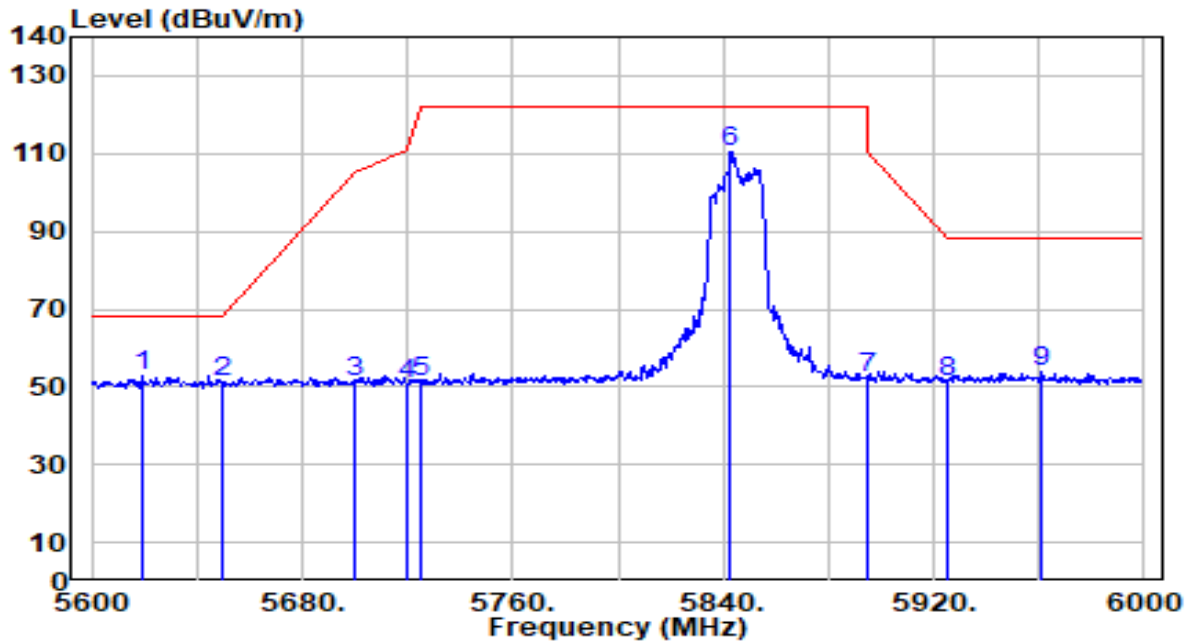


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5619.200	51.74	1.26	53.01	-15.19	68.20	111	251	Peak
2		5650.000	49.55	1.44	50.99	-17.21	68.20	111	251	Peak
3		5700.000	49.43	1.72	51.15	-54.05	105.20	111	251	Peak
4		5720.000	49.10	1.84	50.93	-59.87	110.80	111	251	Peak
5		5725.000	49.17	1.86	51.04	-71.16	122.20	111	251	Peak
6		5842.800	108.00	2.27	110.27	N/A	N/A	111	251	Peak
7		5895.000	49.88	2.26	52.14	-58.06	110.20	111	251	Peak
8		5925.000	49.12	2.25	51.36	-36.84	88.20	111	251	Peak
9		5961.200	51.72	2.23	53.96	-34.24	88.20	111	251	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_Band4_TX_CH 169 ANT 0+1	Test Voltage	By Notebook PC

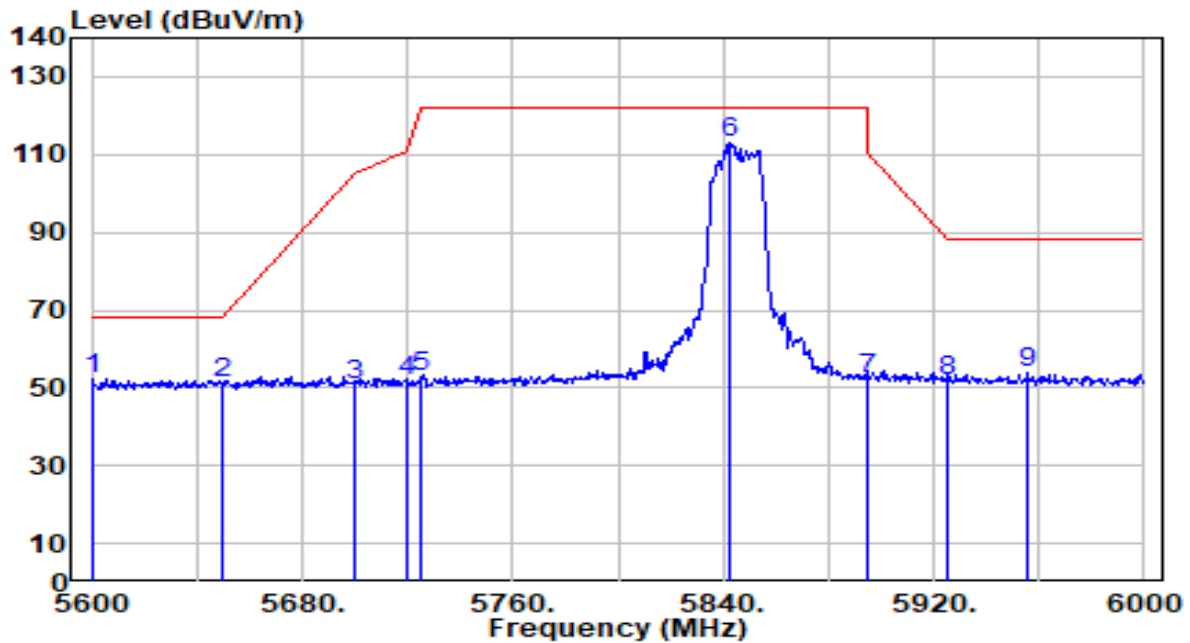


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5600.000	51.26	1.16	52.42	-15.78	68.20	184	211	Peak
2		5650.000	49.80	1.44	51.24	-16.96	68.20	184	211	Peak
3		5700.000	49.04	1.72	50.77	-54.43	105.20	184	211	Peak
4		5720.000	49.95	1.84	51.79	-59.01	110.80	184	211	Peak
5		5725.000	50.82	1.86	52.68	-69.52	122.20	184	211	Peak
6		5842.000	110.56	2.27	112.84	N/A	N/A	184	211	Peak
7		5895.000	50.29	2.26	52.55	-57.65	110.20	184	211	Peak
8		5925.000	49.67	2.25	51.91	-36.29	88.20	184	211	Peak
9		5955.600	51.41	2.24	53.64	-34.56	88.20	184	211	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_Band4_TX_CH 173 ANT 0+1	Test Voltage	By Notebook PC

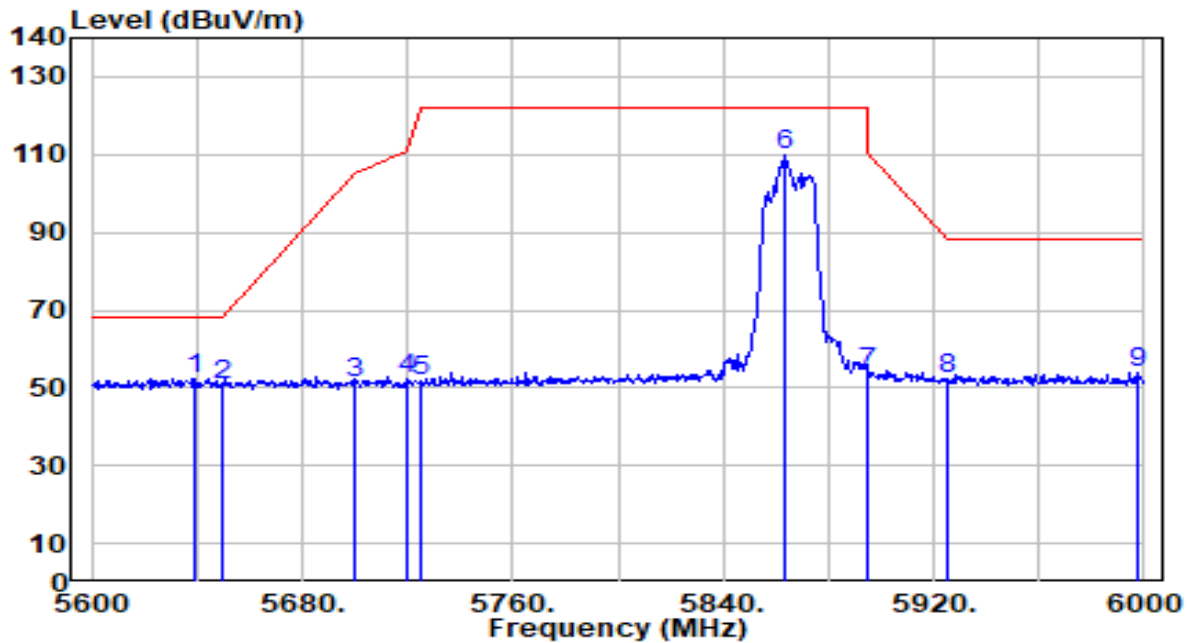


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5639.600	50.87	1.38	52.25	-15.95	68.20	123	251	Peak
2		5650.000	49.49	1.44	50.93	-17.27	68.20	123	251	Peak
3		5700.000	49.75	1.72	51.47	-53.73	105.20	123	251	Peak
4		5720.000	50.22	1.84	52.05	-58.75	110.80	123	251	Peak
5		5725.000	49.71	1.86	51.58	-70.62	122.20	123	251	Peak
6		5863.600	107.57	2.27	109.84	N/A	N/A	123	251	Peak
7		5895.000	51.46	2.26	53.72	-56.48	110.20	123	251	Peak
8		5925.000	50.31	2.25	52.56	-35.64	88.20	123	251	Peak
9		5997.200	51.43	2.22	53.66	-34.54	88.20	123	251	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(1dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_Band4_TX_CH 173 ANT 0+1	Test Voltage	By Notebook PC

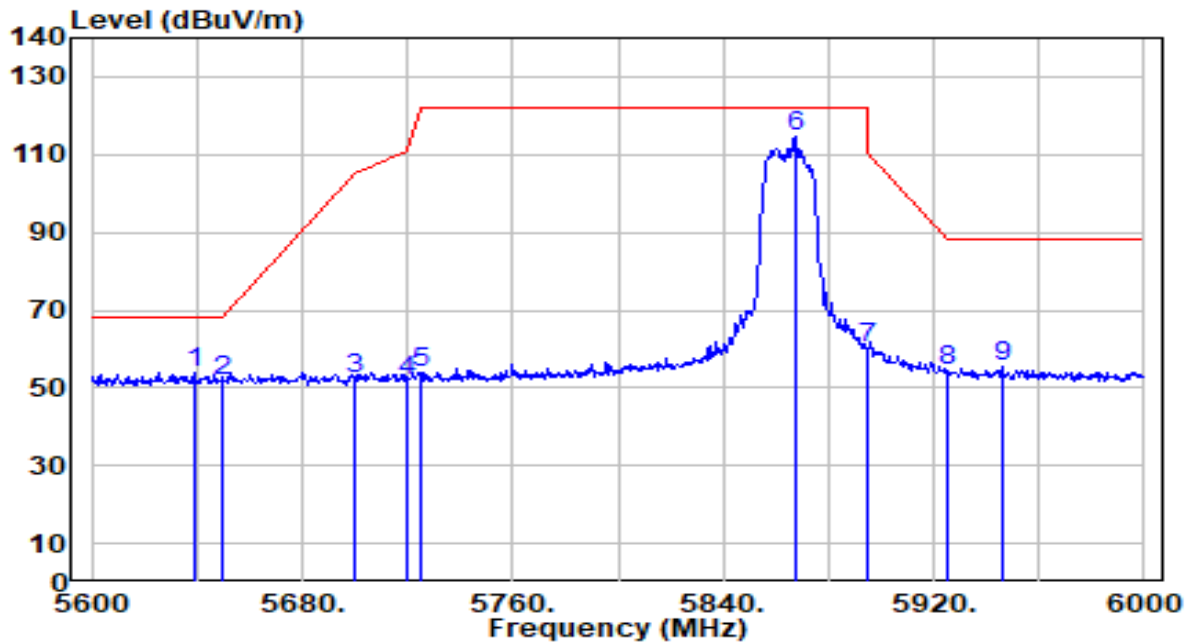


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5639.200	52.37	1.38	53.75	-14.45	68.20	145	101	Peak
2		5650.000	50.24	1.44	51.68	-16.52	68.20	145	101	Peak
3		5700.000	50.59	1.72	52.31	-52.89	105.20	145	101	Peak
4		5720.000	50.10	1.84	51.93	-58.87	110.80	145	101	Peak
5		5725.000	52.14	1.86	54.01	-68.19	122.20	145	101	Peak
6		5867.200	112.44	2.27	114.71	N/A	N/A	145	101	Peak
7		5895.000	57.92	2.26	60.17	-50.03	110.20	145	101	Peak
8		5925.000	51.93	2.25	54.18	-34.02	88.20	145	101	Peak
9		5946.000	53.00	2.24	55.24	-32.96	88.20	145	101	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_Band4_TX_CH 177 ANT 0+1	Test Voltage	By Notebook PC

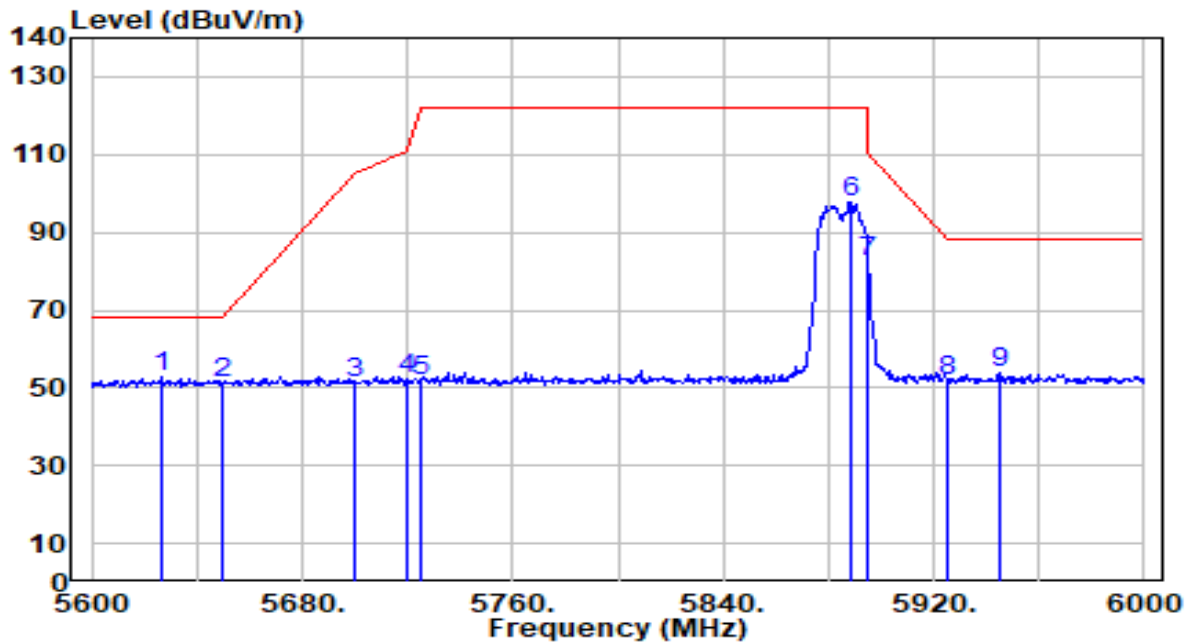


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5626.800	51.42	1.31	52.73	-15.47	68.20	105	208	Peak
2		5650.000	49.66	1.44	51.10	-17.10	68.20	105	208	Peak
3		5700.000	49.74	1.72	51.46	-53.74	105.20	105	208	Peak
4		5720.000	50.34	1.84	52.18	-58.62	110.80	105	208	Peak
5		5725.000	49.91	1.86	51.77	-70.43	122.20	105	208	Peak
6		5888.400	95.35	2.26	97.61	N/A	N/A	105	208	Peak
7		5895.000	79.96	2.26	82.21	-27.99	110.20	105	208	Peak
8		5925.000	49.70	2.25	51.94	-36.26	88.20	105	208	Peak
9		5944.800	51.58	2.24	53.82	-34.38	88.20	105	208	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_Band4_TX_CH 177 ANT 0+1	Test Voltage	By Notebook PC

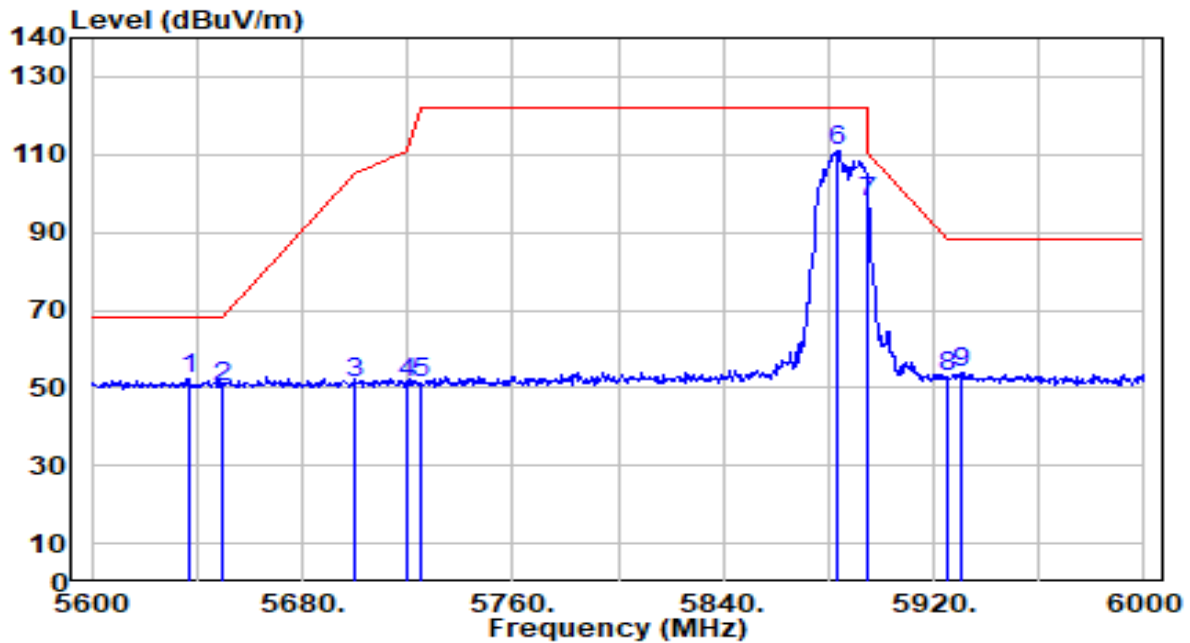


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5636.800	50.87	1.36	52.23	-15.97	68.20	115	210	Peak
2	5650.000	48.97	1.44	50.41	-17.79	68.20	115	210	Peak
3	5700.000	49.38	1.72	51.10	-54.10	105.20	115	210	Peak
4	5720.000	49.19	1.84	51.03	-59.77	110.80	115	210	Peak
5	5725.000	49.12	1.86	50.98	-71.22	122.20	115	210	Peak
6	5883.600	108.64	2.26	110.90	N/A	N/A	115	210	Peak
7	* 5895.000	95.65	2.26	97.91	-12.29	110.20	115	210	Peak
8	5925.000	50.51	2.25	52.75	-35.45	88.20	115	210	Peak
9	5930.000	51.68	2.24	53.93	-34.27	88.20	115	210	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(1dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_Band4_TX_CH 167 ANT 0+1	Test Voltage	By Notebook PC

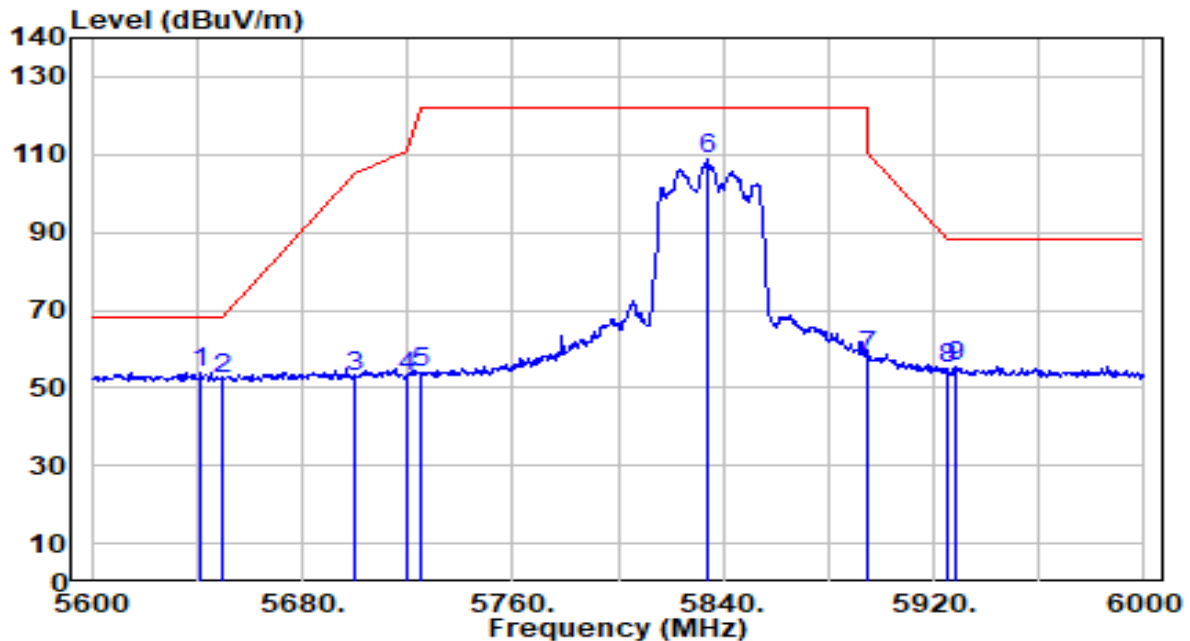


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5641.200	52.37	1.39	53.76	-14.44	68.20	102	303	Peak
2		5650.000	50.85	1.44	52.29	-15.91	68.20	102	303	Peak
3		5700.000	51.09	1.72	52.82	-52.38	105.20	102	303	Peak
4		5720.000	51.15	1.84	52.99	-57.81	110.80	102	303	Peak
5		5725.000	51.78	1.86	53.65	-68.55	122.20	102	303	Peak
6		5834.000	106.42	2.28	108.69	N/A	N/A	102	303	Peak
7		5895.000	55.99	2.26	58.25	-51.95	110.20	102	303	Peak
8		5925.000	52.83	2.25	55.08	-33.12	88.20	102	303	Peak
9		5928.000	53.30	2.24	55.55	-32.65	88.20	102	303	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(1dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_Band4_TX_CH 167 ANT 0+1	Test Voltage	By Notebook PC

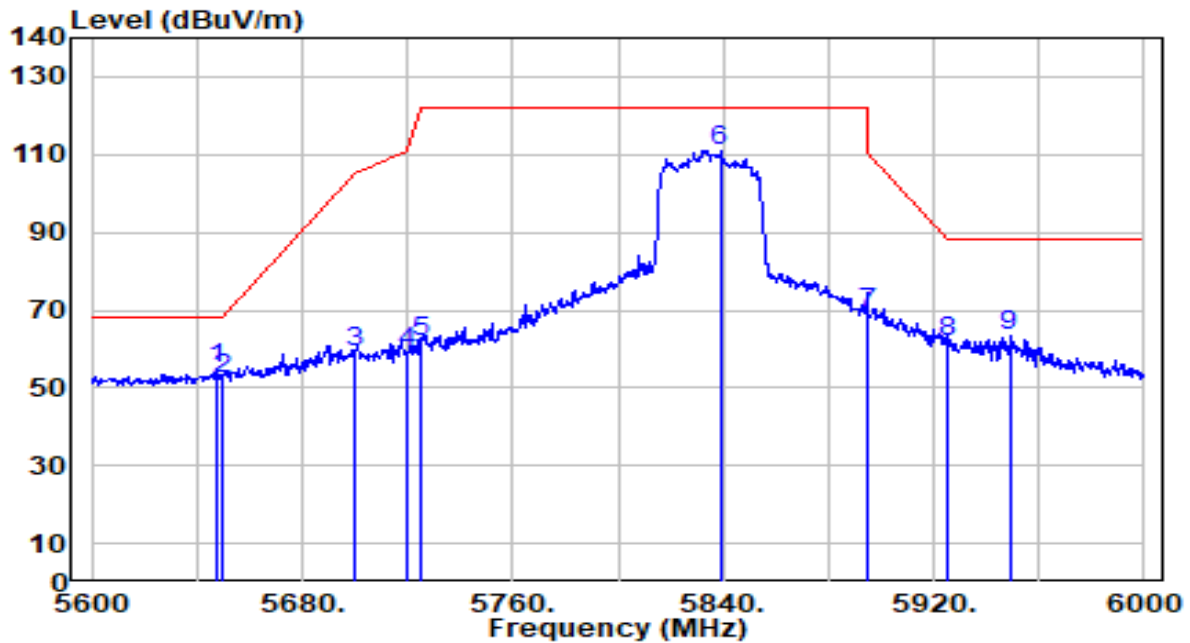


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5647.200	53.44	1.42	54.86	-13.34	68.20	101	87	Peak
2		5650.000	51.03	1.44	52.47	-15.73	68.20	101	87	Peak
3		5700.000	57.48	1.72	59.20	-46.00	105.20	101	87	Peak
4		5720.000	57.20	1.84	59.03	-51.77	110.80	101	87	Peak
5		5725.000	60.20	1.86	62.07	-60.13	122.20	101	87	Peak
6		5838.800	108.91	2.27	111.19	N/A	N/A	101	87	Peak
7		5895.000	66.81	2.26	69.06	-41.14	110.20	101	87	Peak
8		5925.000	59.76	2.25	62.01	-26.19	88.20	101	87	Peak
9		5948.800	60.97	2.24	63.20	-25.00	88.20	101	87	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_Band4_TX_CH 175 ANT 0+1	Test Voltage	By Notebook PC

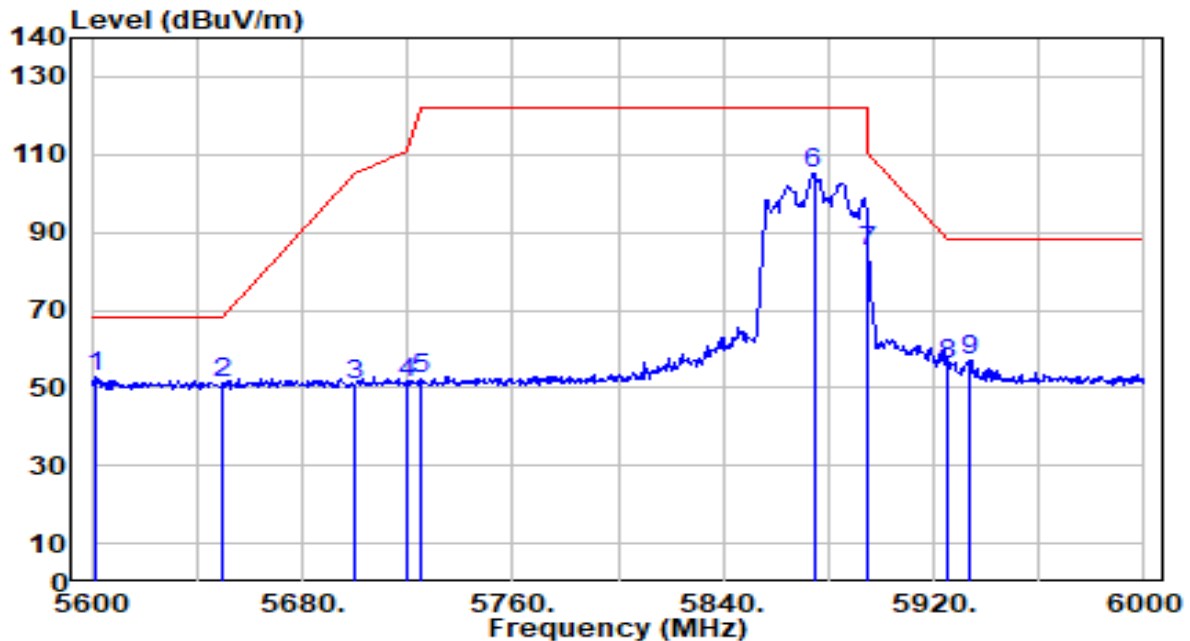


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5601.200	51.52	1.16	52.69	-15.51	68.20	107	253	Peak
2		5650.000	49.55	1.44	50.99	-17.21	68.20	107	253	Peak
3		5700.000	49.07	1.72	50.79	-54.41	105.20	107	253	Peak
4		5720.000	49.19	1.84	51.03	-59.77	110.80	107	253	Peak
5		5725.000	50.25	1.86	52.11	-70.09	122.20	107	253	Peak
6		5874.400	103.11	2.26	105.37	N/A	N/A	107	253	Peak
7		5895.000	83.00	2.26	85.25	-24.95	110.20	107	253	Peak
8		5925.000	53.62	2.25	55.86	-32.34	88.20	107	253	Peak
9		5934.000	55.05	2.24	57.30	-30.90	88.20	107	253	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-40MHz_Band4_TX_CH 175 ANT 0+1	Test Voltage	By Notebook PC

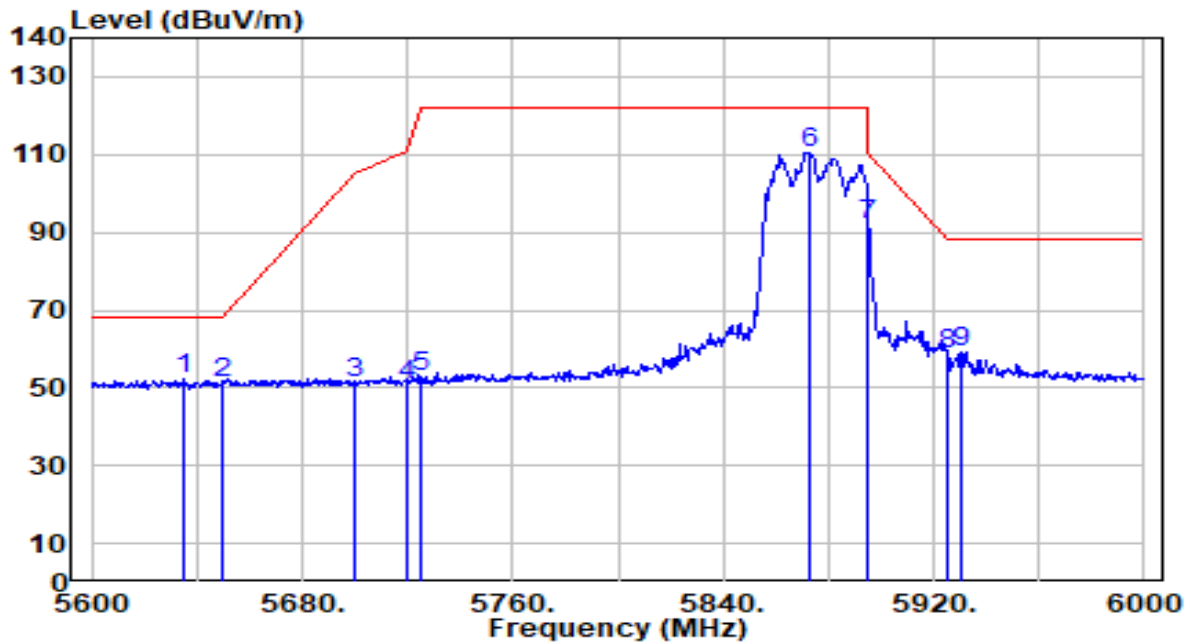


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5635.200	50.70	1.36	52.05	-16.15	68.20	103	210	Peak
2		5650.000	49.99	1.44	51.43	-16.77	68.20	103	210	Peak
3		5700.000	49.66	1.72	51.38	-53.82	105.20	103	210	Peak
4		5720.000	49.09	1.84	50.92	-59.88	110.80	103	210	Peak
5		5725.000	50.98	1.86	52.85	-69.35	122.20	103	210	Peak
6		5872.800	108.29	2.26	110.55	N/A	N/A	103	210	Peak
7		5895.000	89.59	2.26	91.84	-18.36	110.20	103	210	Peak
8		5925.000	56.27	2.25	58.51	-29.69	88.20	103	210	Peak
9		5930.800	56.73	2.24	58.98	-29.22	88.20	103	210	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-80MHz_Band4_TX_CH 171 ANT 0+1	Test Voltage	By Notebook PC

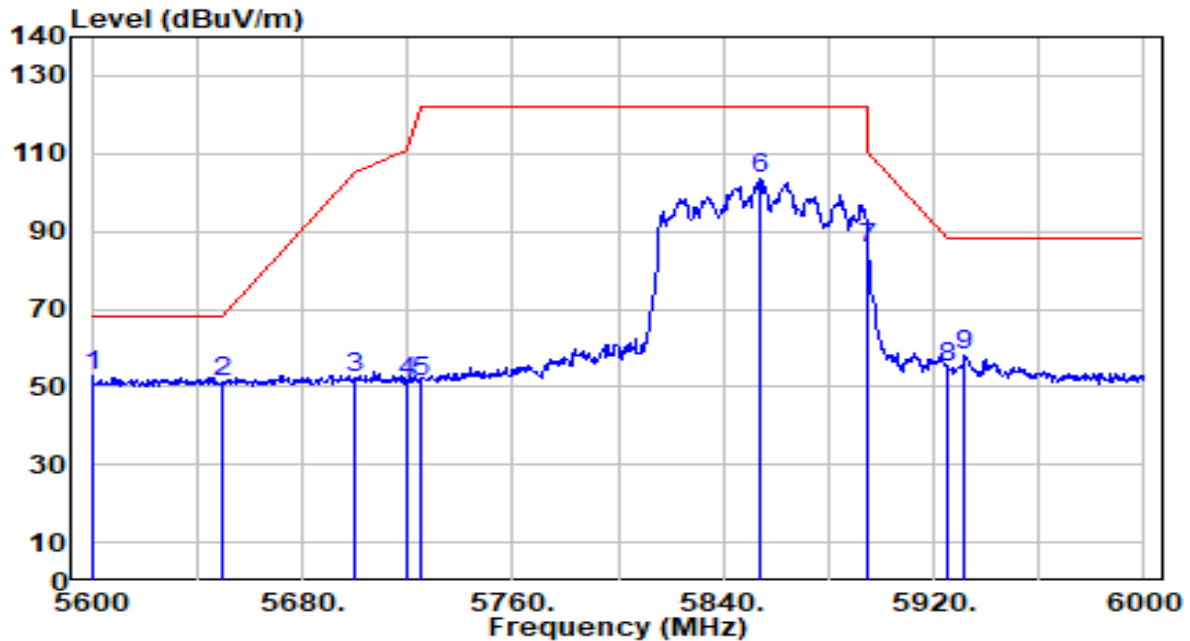


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5600.000	51.70	1.16	52.86	-15.34	68.20	111	245	Peak
2		5650.000	49.60	1.44	51.04	-17.16	68.20	111	245	Peak
3		5700.000	50.58	1.72	52.30	-52.90	105.20	111	245	Peak
4		5720.000	49.42	1.84	51.25	-59.55	110.80	111	245	Peak
5		5725.000	49.32	1.86	51.19	-71.01	122.20	111	245	Peak
6		5854.000	101.02	2.27	103.29	N/A	N/A	111	245	Peak
7		5895.000	83.16	2.26	85.42	-24.78	110.20	111	245	Peak
8		5925.000	52.84	2.25	55.09	-33.11	88.20	111	245	Peak
9		5931.600	55.83	2.24	58.08	-30.12	88.20	111	245	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-80MHz_Band4_TX_CH 171 ANT 0+1	Test Voltage	By Notebook PC

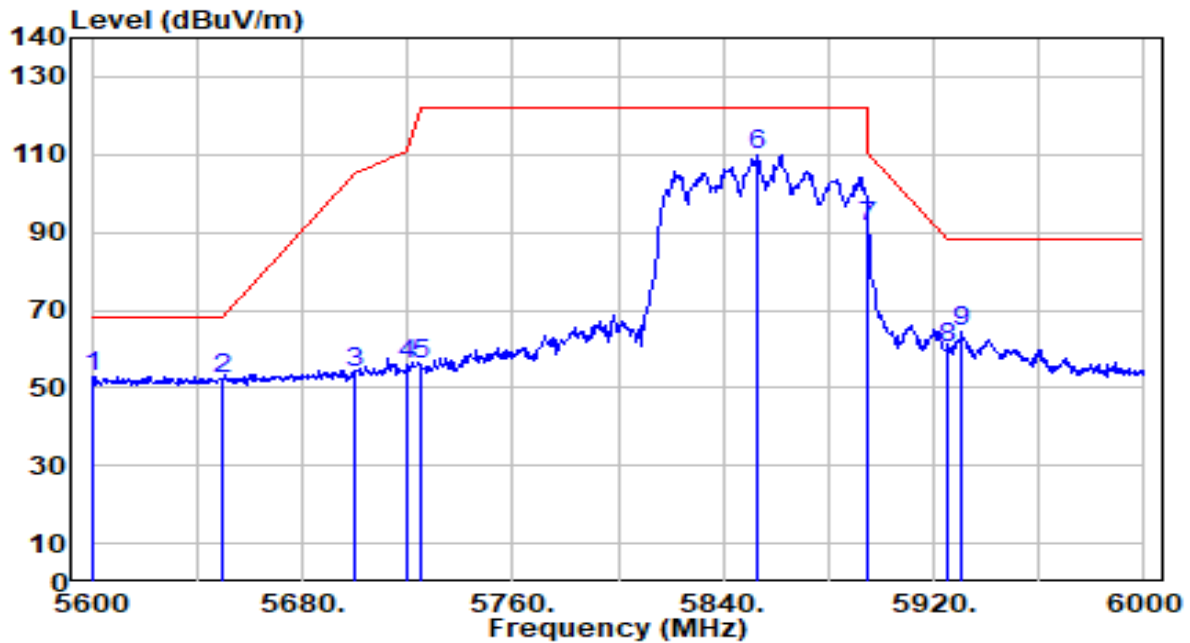


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5600.800	51.88	1.16	53.04	-15.16	68.20	106	211	Peak
2		5650.000	50.94	1.44	52.37	-15.83	68.20	106	211	Peak
3		5700.000	52.14	1.72	53.86	-51.34	105.20	106	211	Peak
4		5720.000	54.11	1.84	55.95	-54.85	110.80	106	211	Peak
5		5725.000	53.98	1.86	55.84	-66.36	122.20	106	211	Peak
6		5852.800	107.42	2.27	109.69	N/A	N/A	106	211	Peak
7		5895.000	88.98	2.26	91.24	-18.96	110.20	106	211	Peak
8		5925.000	57.76	2.25	60.01	-28.19	88.20	106	211	Peak
9		5930.800	62.25	2.24	64.50	-23.70	88.20	106	211	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-160MHz_Band4_TX_CH 163 ANT 0+1	Test Voltage	By Notebook PC

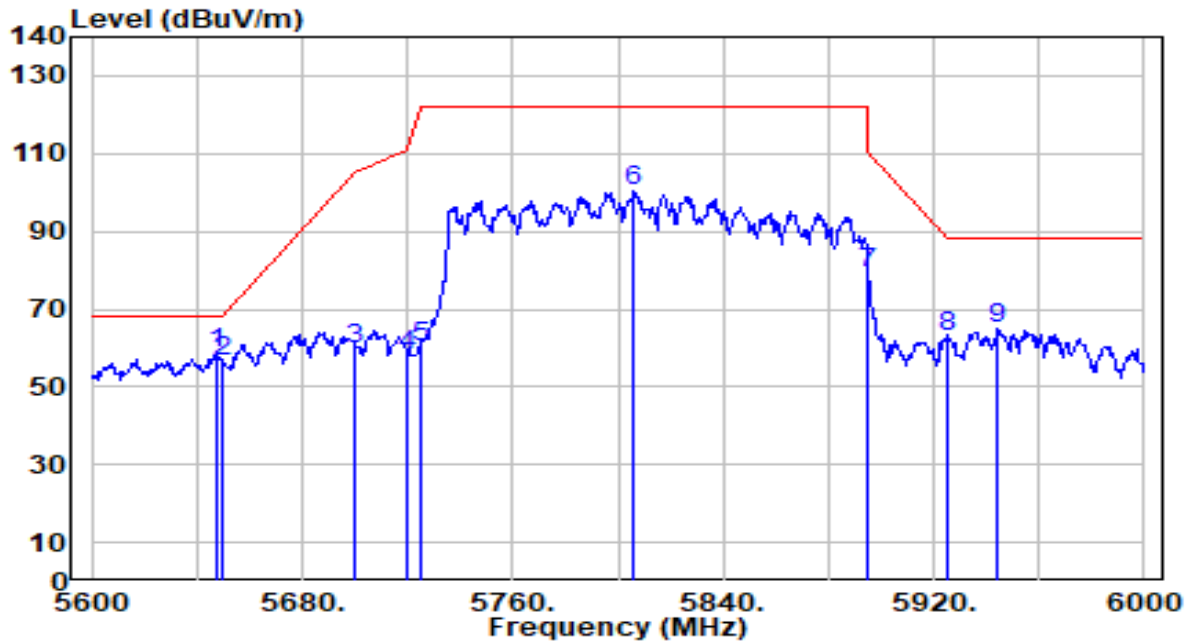


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5647.200	57.31	1.42	58.73	-9.47	68.20	124	314	Peak
2		5650.000	55.02	1.44	56.46	-11.74	68.20	124	314	Peak
3		5700.000	58.13	1.72	59.85	-45.35	105.20	124	314	Peak
4		5720.000	56.49	1.84	58.32	-52.48	110.80	124	314	Peak
5		5725.000	58.54	1.86	60.40	-61.80	122.20	124	314	Peak
6		5806.000	98.11	2.29	100.39	N/A	N/A	124	314	Peak
7		5895.000	76.80	2.26	79.05	-31.15	110.20	124	314	Peak
8		5925.000	60.66	2.25	62.91	-25.29	88.20	124	314	Peak
9		5944.000	62.67	2.24	64.91	-23.29	88.20	124	314	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(1dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-16
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-160MHz_Band4_TX_CH 163 ANT 0+1	Test Voltage	By Notebook PC

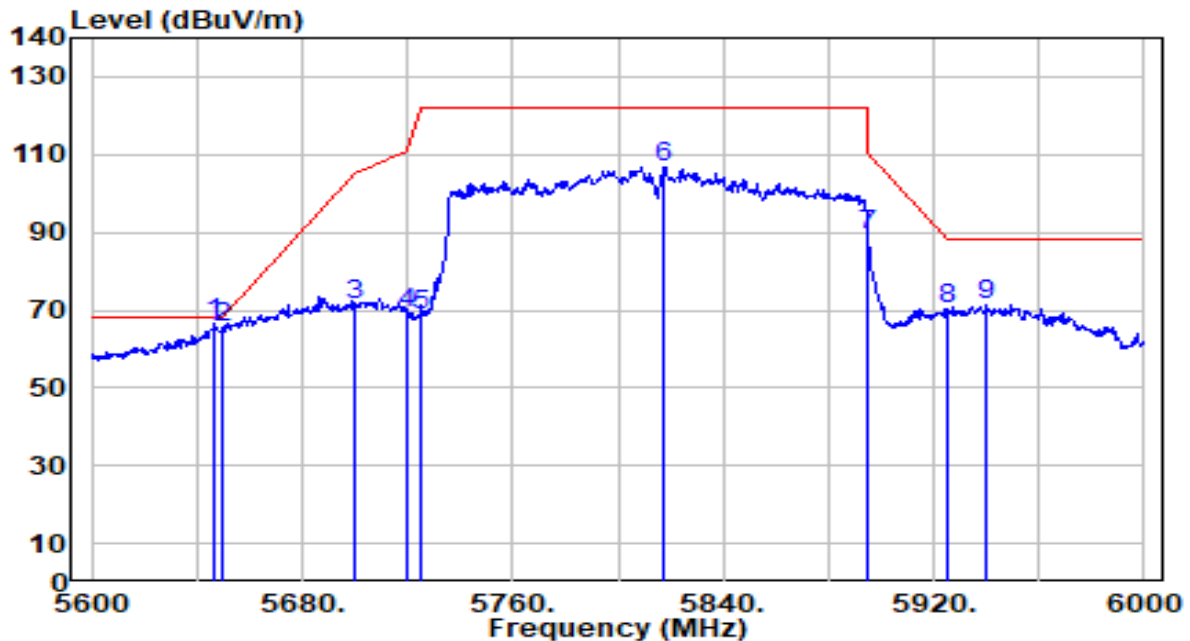


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5646.400	65.27	1.42	66.69	-1.51	68.20	163	114	Peak
2		5650.000	64.02	1.44	65.46	-2.74	68.20	163	114	Peak
3		5700.000	69.41	1.72	71.13	-34.07	105.20	163	114	Peak
4		5720.000	67.56	1.84	69.40	-41.40	110.80	163	114	Peak
5		5725.000	66.67	1.86	68.53	-53.67	122.20	163	114	Peak
6		5817.600	104.68	2.28	106.96	N/A	N/A	163	114	Peak
7		5895.000	86.83	2.26	89.09	-21.11	110.20	163	114	Peak
8		5925.000	67.98	2.25	70.23	-17.97	88.20	163	114	Peak
9		5940.000	68.99	2.24	71.23	-16.97	88.20	163	114	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-20MHz_26Tone_RU0_Band4_TX_CH 163 ANT 0+1	Test Voltage	By Notebook PC

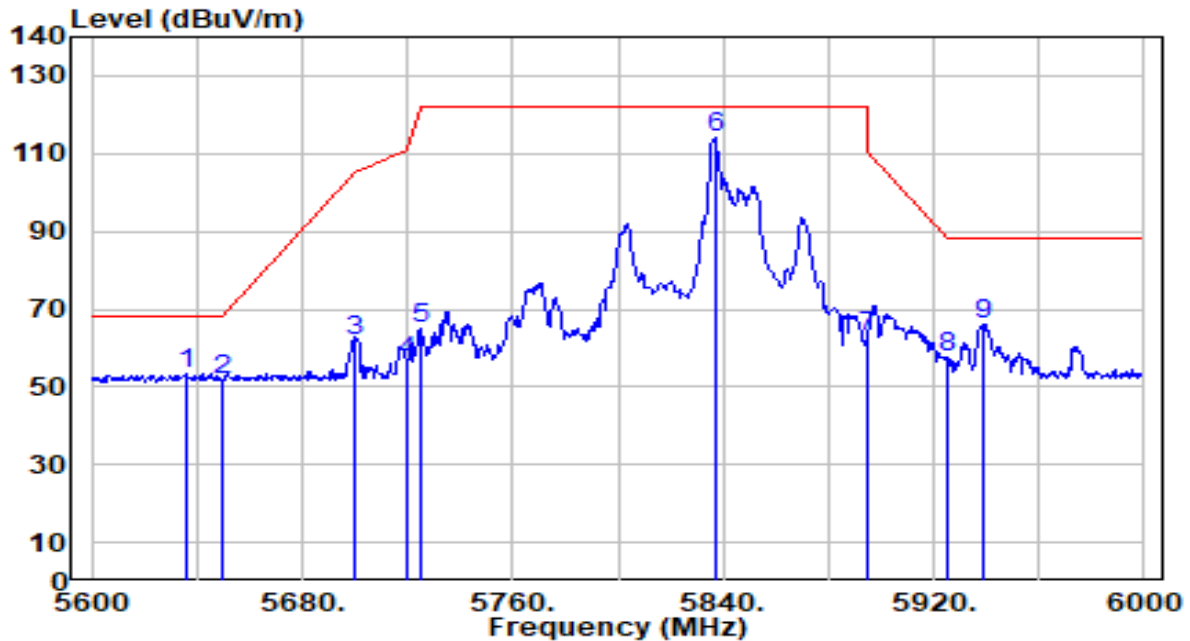

No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5636.400	51.92	1.36	53.28	-14.92	68.20	383	303	Peak
2		5650.000	50.20	1.44	51.64	-16.56	68.20	383	303	Peak
3		5700.000	59.91	1.72	61.63	-43.57	105.20	383	303	Peak
4		5720.000	54.82	1.84	56.66	-54.14	110.80	383	303	Peak
5		5725.000	62.91	1.86	64.78	-57.42	122.20	383	303	Peak
6		5836.800	111.72	2.28	114.00	N/A	N/A	383	303	Peak
7		5895.000	60.86	2.26	63.11	-47.09	110.20	383	303	Peak
8		5925.000	55.45	2.25	57.70	-30.50	88.20	383	303	Peak
9		5939.200	64.05	2.24	66.29	-21.91	88.20	383	303	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.