


EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11ax-20MHz_26Tone_RU0_Band4_TX_CH 163 ANT 0+1	Test Voltage	By Notebook PC

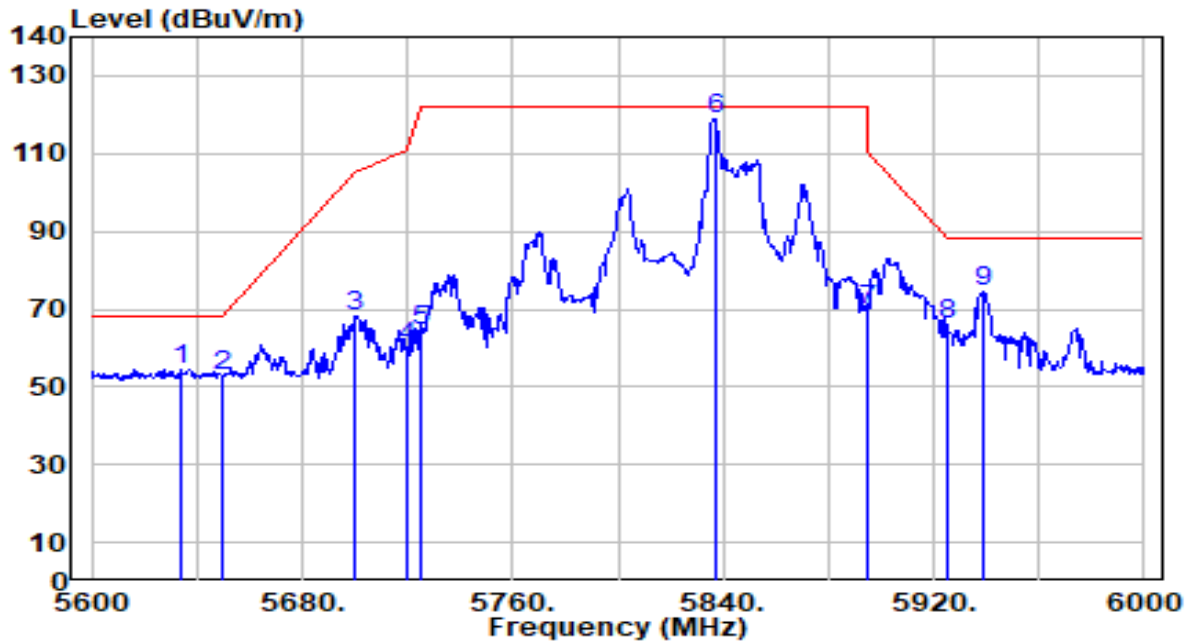


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5634.400	53.32	1.35	54.67	-13.53	68.20	100	96	Peak
2		5650.000	51.23	1.44	52.67	-15.53	68.20	100	96	Peak
3		5700.000	66.41	1.72	68.13	-37.07	105.20	100	96	Peak
4		5720.000	58.45	1.84	60.29	-50.51	110.80	100	96	Peak
5		5725.000	62.72	1.86	64.59	-57.61	122.20	100	96	Peak
6		5836.800	116.77	2.28	119.04	N/A	N/A	100	96	Peak
7		5895.000	67.67	2.26	69.93	-40.27	110.20	100	96	Peak
8		5925.000	63.82	2.25	66.06	-22.14	88.20	100	96	Peak
9		5938.800	72.22	2.24	74.46	-13.74	88.20	100	96	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_26Tone_RU8_Band4_TX_CH 177 ANT 0+1	Test Voltage	By Notebook PC

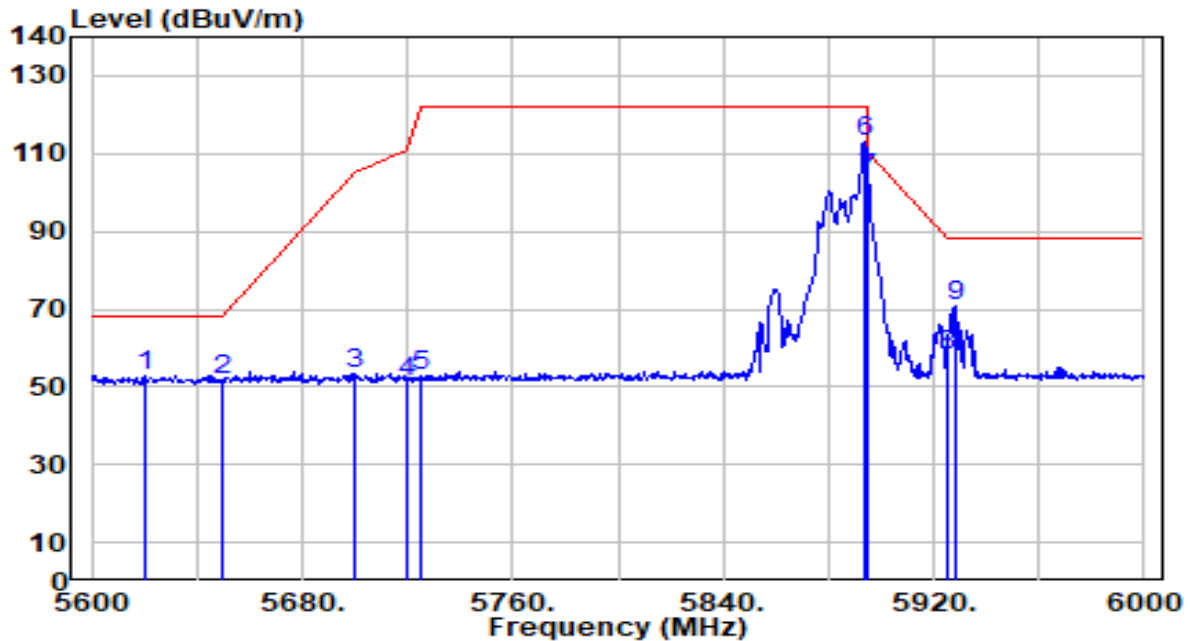


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5620.000	51.76	1.27	53.03	-15.17	68.20	186	224	Peak
2	5650.000	50.41	1.44	51.84	-16.36	68.20	186	224	Peak
3	5700.000	51.81	1.72	53.53	-51.67	105.20	186	224	Peak
4	5720.000	49.49	1.84	51.32	-59.48	110.80	186	224	Peak
5	5725.000	50.79	1.86	52.66	-69.54	122.20	186	224	Peak
6	5894.000	110.57	2.26	112.82	N/A	N/A	186	224	Peak
7	* 5895.000	101.47	2.26	103.73	-6.47	110.20	186	224	Peak
8	5925.000	55.81	2.25	58.06	-30.14	88.20	186	224	Peak
9	5928.000	68.35	2.24	70.59	-17.61	88.20	186	224	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preampifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_26Tone_RU8_Band4_TX_CH 177 ANT 0+1	Test Voltage	By Notebook PC

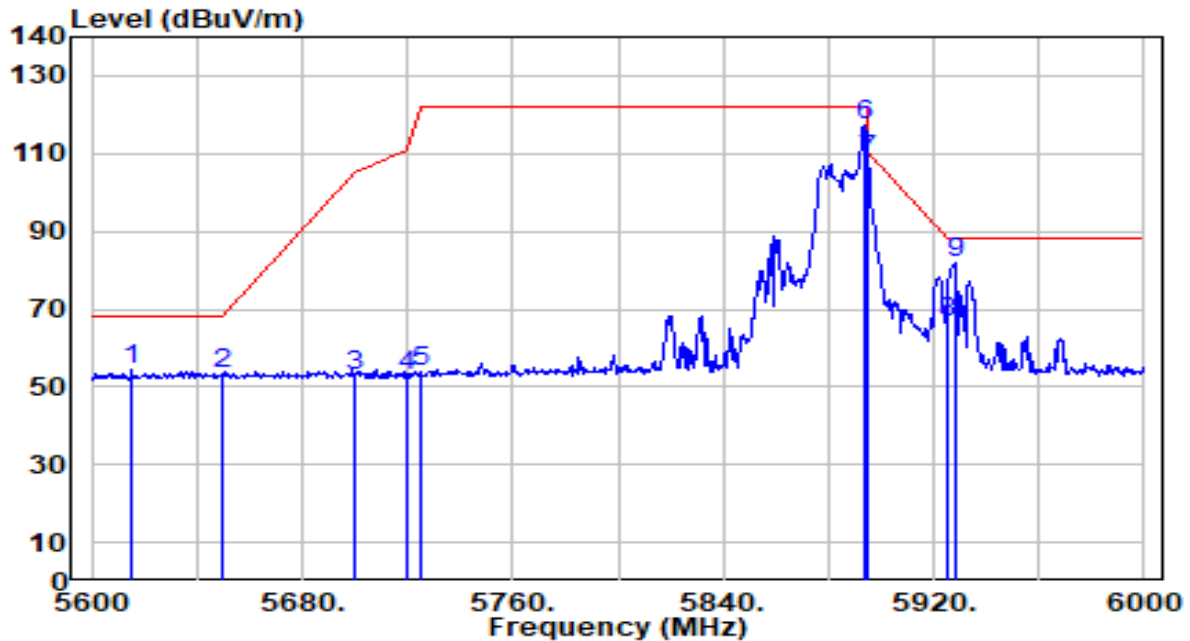


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5615.200	53.03	1.24	54.27	-13.93	68.20	124	91	Peak
2	5650.000	52.12	1.44	53.56	-14.64	68.20	124	91	Peak
3	5700.000	51.21	1.72	52.94	-52.26	105.20	124	91	Peak
4	5720.000	51.15	1.84	52.99	-57.81	110.80	124	91	Peak
5	5725.000	51.79	1.86	53.65	-68.55	122.20	124	91	Peak
6	5893.600	115.17	2.26	117.43	N/A	N/A	124	91	Peak
7	* 5895.000	106.16	2.26	108.42	-1.78	110.20	124	91	Peak
8	5925.000	64.21	2.25	66.46	-21.74	88.20	124	91	Peak
9	5928.000	79.41	2.24	81.65	-6.55	88.20	124	91	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preampifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_52Tone_RU74_Band4_TX_CH 169 ANT 0+1	Test Voltage	By Notebook PC

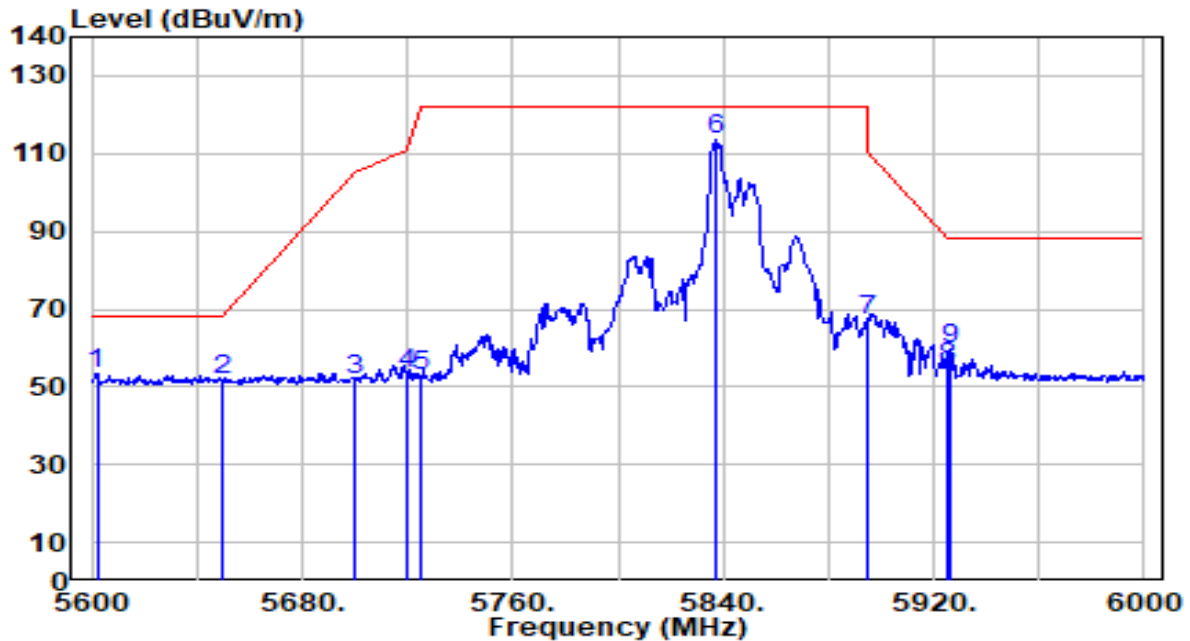


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5602.000	52.42	1.17	53.59	-14.61	68.20	130	316	Peak
2		5650.000	50.46	1.44	51.90	-16.30	68.20	130	316	Peak
3		5700.000	49.83	1.72	51.55	-53.65	105.20	130	316	Peak
4		5720.000	51.79	1.84	53.62	-57.18	110.80	130	316	Peak
5		5725.000	50.78	1.86	52.64	-69.56	122.20	130	316	Peak
6		5836.800	111.25	2.28	113.52	N/A	N/A	130	316	Peak
7		5895.000	65.04	2.26	67.30	-42.90	110.20	130	316	Peak
8		5925.000	52.82	2.25	55.07	-33.13	88.20	130	316	Peak
9		5926.400	57.52	2.25	59.76	-28.44	88.20	130	316	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_52Tone_RU74_Band4_TX_CH 169 ANT 0+1	Test Voltage	By Notebook PC

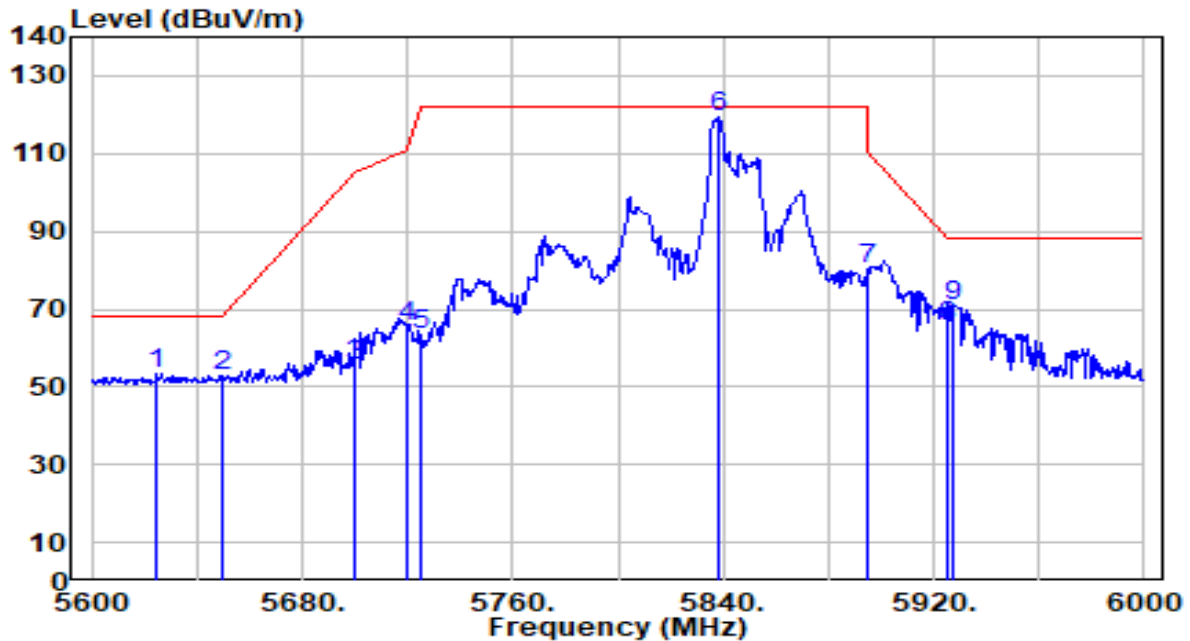


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5624.400	51.96	1.29	53.25	-14.95	68.20	134	91	Peak
2		5650.000	51.19	1.44	52.63	-15.57	68.20	134	91	Peak
3		5700.000	53.66	1.72	55.38	-49.82	105.20	134	91	Peak
4		5720.000	63.63	1.84	65.46	-45.34	110.80	134	91	Peak
5		5725.000	61.49	1.86	63.35	-58.85	122.20	134	91	Peak
6		5838.000	116.92	2.28	119.19	N/A	N/A	134	91	Peak
7		5895.000	77.83	2.26	80.08	-30.12	110.20	134	91	Peak
8		5925.000	63.26	2.25	65.50	-22.70	88.20	134	91	Peak
9		5927.600	68.66	2.24	70.90	-17.30	88.20	134	91	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_52Tone_RU77_Band4_TX_CH 177 ANT 0+1	Test Voltage	By Notebook PC

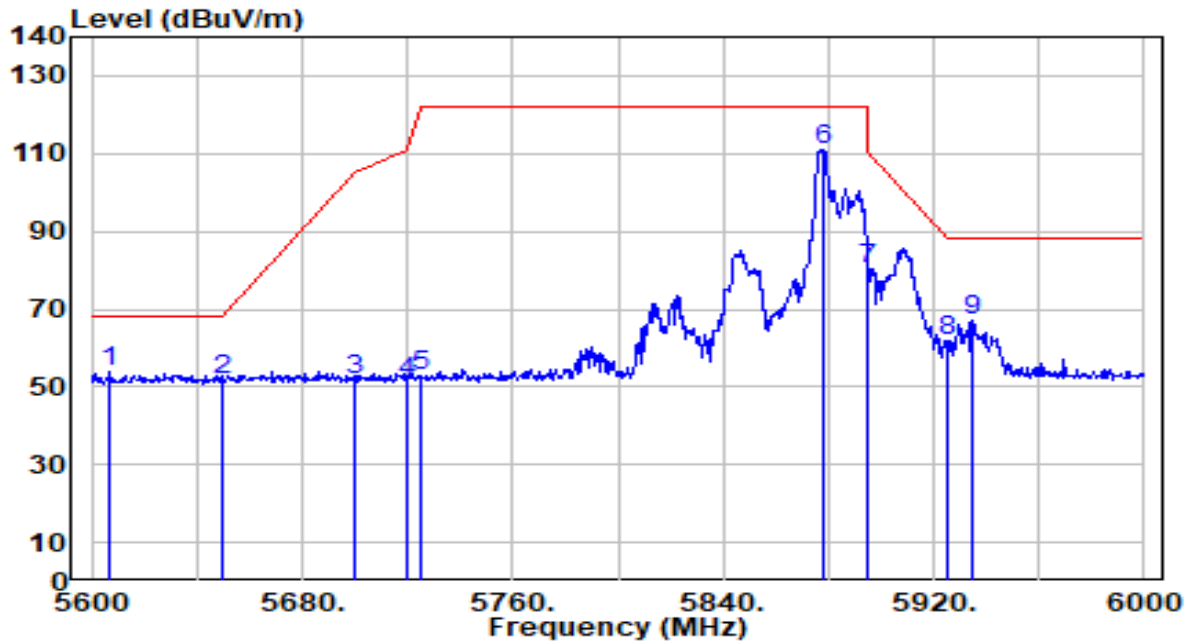


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5606.800	52.44	1.19	53.63	-14.57	68.20	100	222	Peak
2		5650.000	50.48	1.44	51.92	-16.28	68.20	100	222	Peak
3		5700.000	50.18	1.72	51.91	-53.29	105.20	100	222	Peak
4		5720.000	49.57	1.84	51.41	-59.39	110.80	100	222	Peak
5		5725.000	51.05	1.86	52.91	-69.29	122.20	100	222	Peak
6		5878.400	108.72	2.26	110.98	N/A	N/A	100	222	Peak
7		5895.000	78.16	2.26	80.41	-29.79	110.20	100	222	Peak
8		5925.000	59.35	2.25	61.59	-26.61	88.20	100	222	Peak
9		5934.800	64.80	2.24	67.04	-21.16	88.20	100	222	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_52Tone_RU77_Band4_TX_CH 177 ANT 0+1	Test Voltage	By Notebook PC

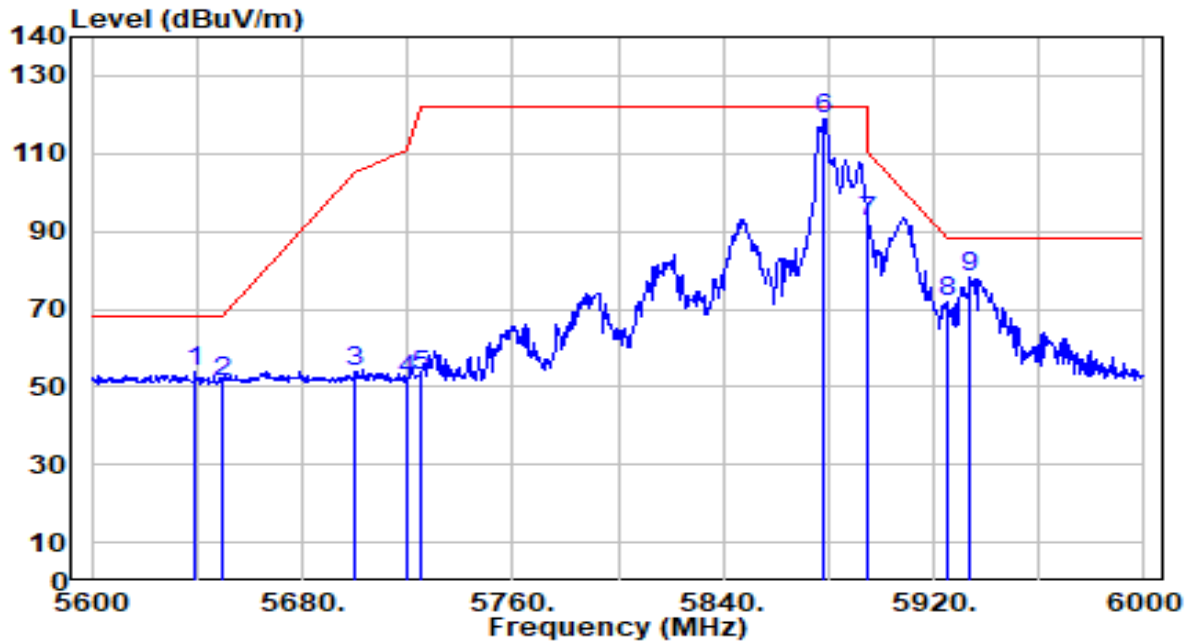


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5639.600	52.34	1.38	53.72	-14.48	68.20	114	155	Peak
2	5650.000	49.91	1.44	51.35	-16.85	68.20	114	155	Peak
3	5700.000	52.21	1.72	53.93	-51.27	105.20	114	155	Peak
4	5720.000	50.05	1.84	51.89	-58.91	110.80	114	155	Peak
5	5725.000	51.18	1.86	53.04	-69.16	122.20	114	155	Peak
6	5878.400	116.69	2.26	118.95	N/A	N/A	114	155	Peak
7	5895.000	90.26	2.26	92.52	-17.68	110.20	114	155	Peak
8	5925.000	69.61	2.25	71.86	-16.34	88.20	114	155	Peak
9	* 5934.000	75.68	2.24	77.93	-10.27	88.20	114	155	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_106Tone_RU106_Band4_TX_CH 169 ANT 0+1	Test Voltage	By Notebook PC

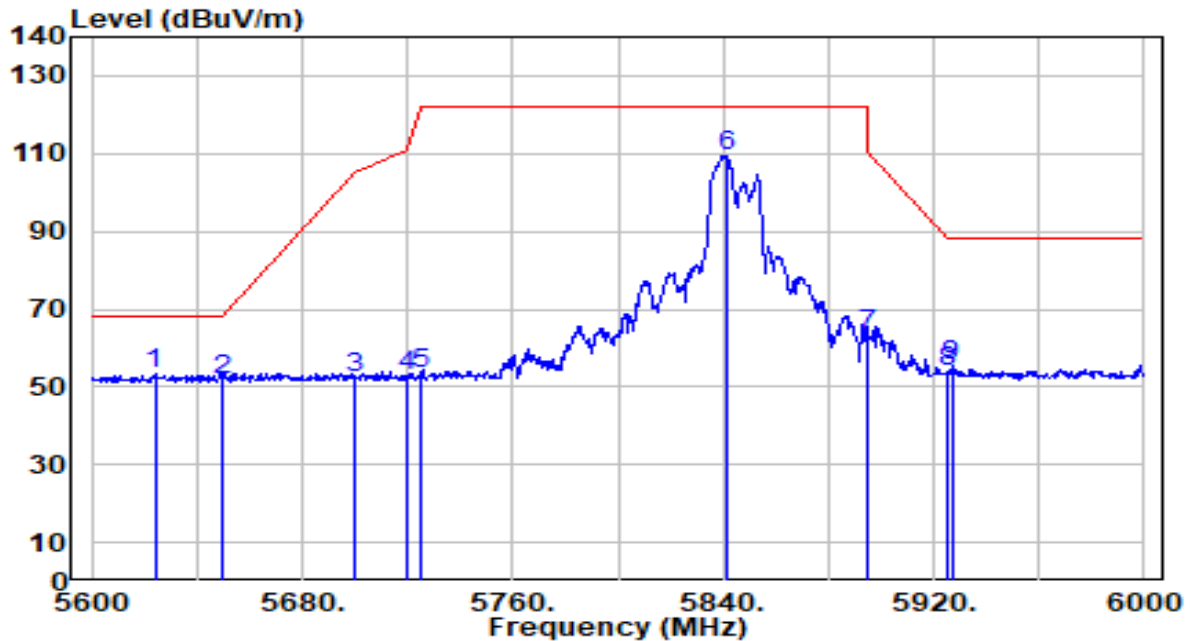


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5624.000	52.04	1.29	53.33	-14.87	68.20	100	209	Peak
2		5650.000	50.26	1.44	51.70	-16.50	68.20	100	209	Peak
3		5700.000	50.51	1.72	52.24	-52.96	105.20	100	209	Peak
4		5720.000	50.78	1.84	52.62	-58.18	110.80	100	209	Peak
5		5725.000	51.76	1.86	53.62	-68.58	122.20	100	209	Peak
6		5841.200	107.30	2.27	109.57	N/A	N/A	100	209	Peak
7		5895.000	61.13	2.26	63.39	-46.81	110.20	100	209	Peak
8		5925.000	51.86	2.25	54.11	-34.09	88.20	100	209	Peak
9		5926.800	53.45	2.24	55.69	-32.51	88.20	100	209	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_106Tone_RU106_Band4_TX_CH 169 ANT 0+1	Test Voltage	By Notebook PC

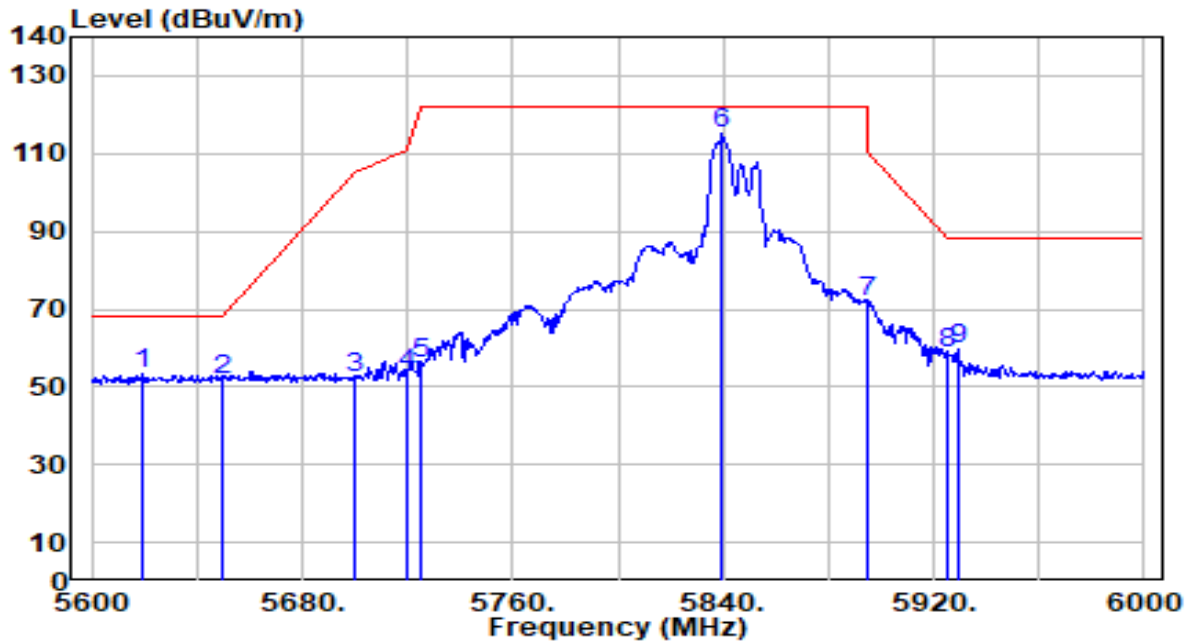


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5619.200	52.26	1.26	53.52	-14.68	68.20	150	152	Peak
2		5650.000	50.51	1.44	51.95	-16.25	68.20	150	152	Peak
3		5700.000	50.36	1.72	52.09	-53.11	105.20	150	152	Peak
4		5720.000	51.46	1.84	53.29	-57.51	110.80	150	152	Peak
5		5725.000	54.21	1.86	56.08	-66.12	122.20	150	152	Peak
6		5839.200	112.84	2.27	115.11	N/A	N/A	150	152	Peak
7		5895.000	69.48	2.26	71.74	-38.46	110.20	150	152	Peak
8		5925.000	56.31	2.25	58.55	-29.65	88.20	150	152	Peak
9		5929.200	57.22	2.24	59.46	-28.74	88.20	150	152	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_106Tone_RU107_Band4_TX_CH 177 ANT 0+1	Test Voltage	By Notebook PC

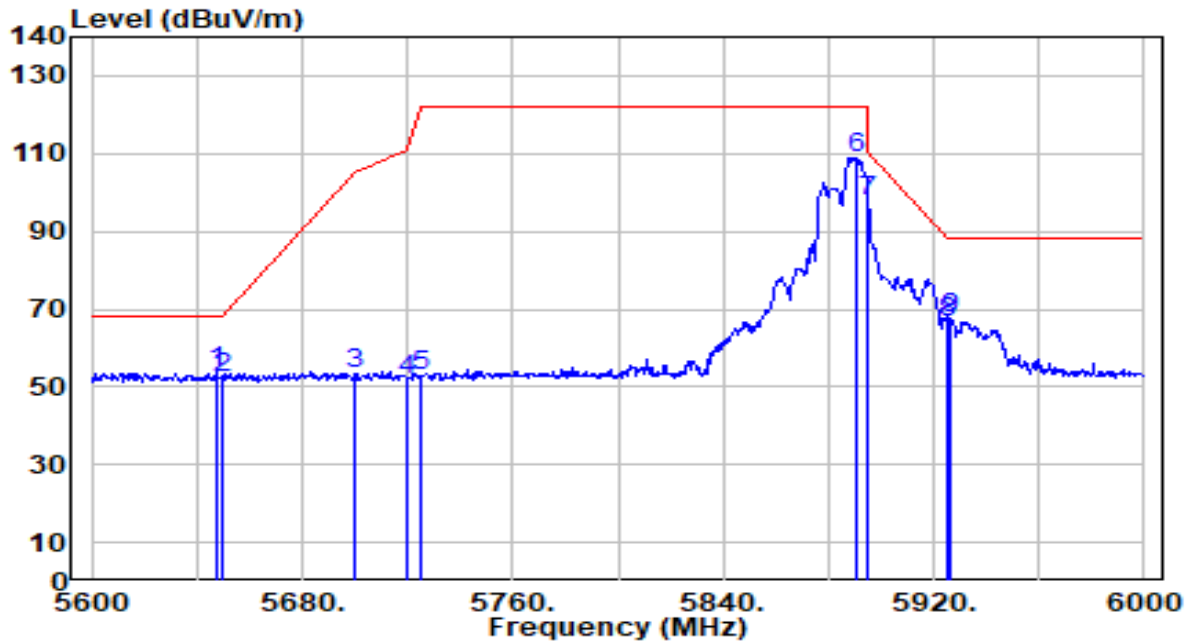


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5647.200	52.40	1.42	53.82	-14.38	68.20	100	210	Peak
2	5650.000	50.73	1.44	52.17	-16.03	68.20	100	210	Peak
3	5700.000	51.76	1.72	53.48	-51.72	105.20	100	210	Peak
4	5720.000	50.13	1.84	51.96	-58.84	110.80	100	210	Peak
5	5725.000	50.97	1.86	52.83	-69.37	122.20	100	210	Peak
6	5890.800	106.66	2.26	108.92	N/A	N/A	100	210	Peak
7	* 5895.000	95.65	2.26	97.90	-12.30	110.20	100	210	Peak
8	5925.000	64.31	2.25	66.55	-21.65	88.20	100	210	Peak
9	5926.400	65.33	2.25	67.58	-20.62	88.20	100	210	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_106Tone_RU107_Band4_TX_CH 177 ANT 0+1	Test Voltage	By Notebook PC

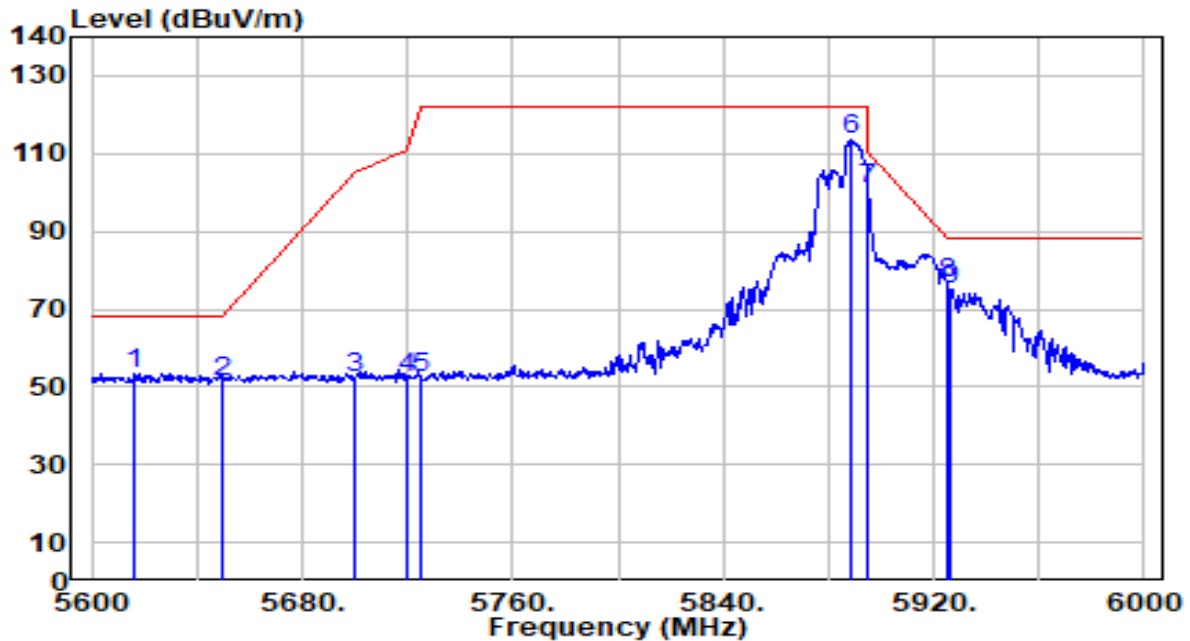


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5616.000	52.26	1.25	53.51	-14.69	68.20	100	149	Peak
2	5650.000	50.02	1.44	51.45	-16.75	68.20	100	149	Peak
3	5700.000	50.50	1.72	52.22	-52.98	105.20	100	149	Peak
4	5720.000	50.39	1.84	52.23	-58.57	110.80	100	149	Peak
5	5725.000	50.68	1.86	52.54	-69.66	122.20	100	149	Peak
6	5888.400	111.08	2.26	113.34	N/A	N/A	100	149	Peak
7	* 5895.000	98.58	2.26	100.84	-9.36	110.20	100	149	Peak
8	5925.000	74.48	2.25	76.73	-11.47	88.20	100	149	Peak
9	5926.400	73.01	2.25	75.26	-12.94	88.20	100	149	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_242Tone_RU122_Band4_TX_CH 169 ANT 0+1	Test Voltage	By Notebook PC

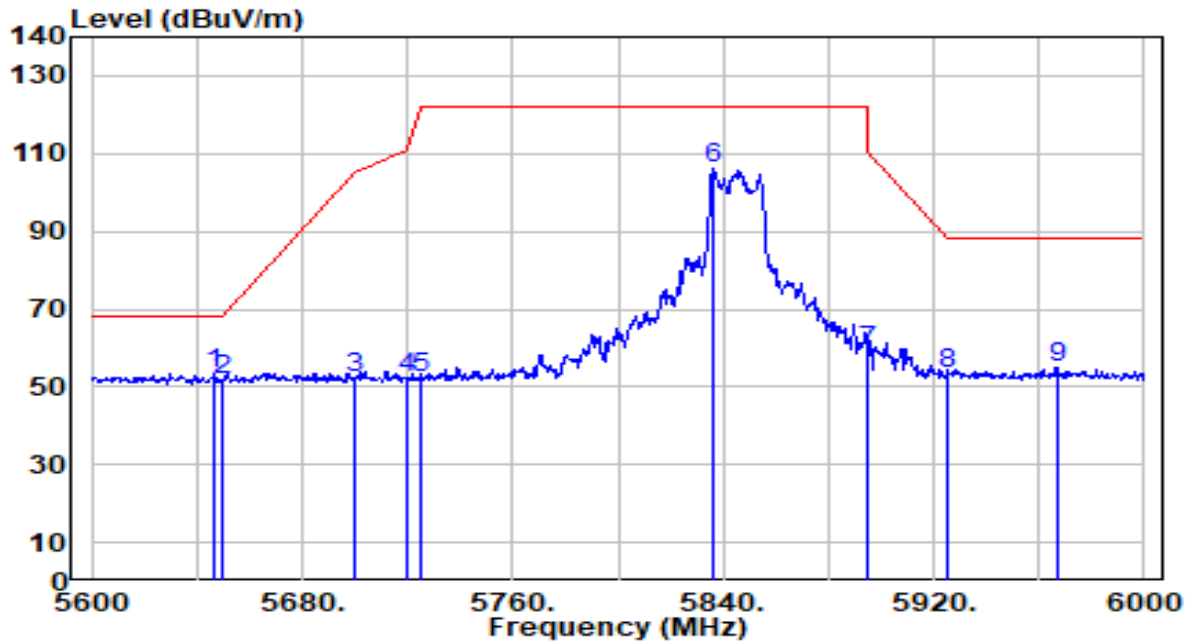


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5646.400	52.20	1.42	53.62	-14.58	68.20	106	315	Peak
2		5650.000	50.31	1.44	51.75	-16.45	68.20	106	315	Peak
3		5700.000	50.33	1.72	52.05	-53.15	105.20	106	315	Peak
4		5720.000	50.29	1.84	52.12	-58.68	110.80	106	315	Peak
5		5725.000	50.38	1.86	52.25	-69.95	122.20	106	315	Peak
6		5836.400	103.81	2.28	106.09	N/A	N/A	106	315	Peak
7		5895.000	56.98	2.26	59.24	-50.96	110.20	106	315	Peak
8		5925.000	50.98	2.25	53.23	-34.97	88.20	106	315	Peak
9		5966.800	52.65	2.23	54.89	-33.31	88.20	106	315	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_242Tone_RU122_Band4_TX_CH 169 ANT 0+1	Test Voltage	By Notebook PC

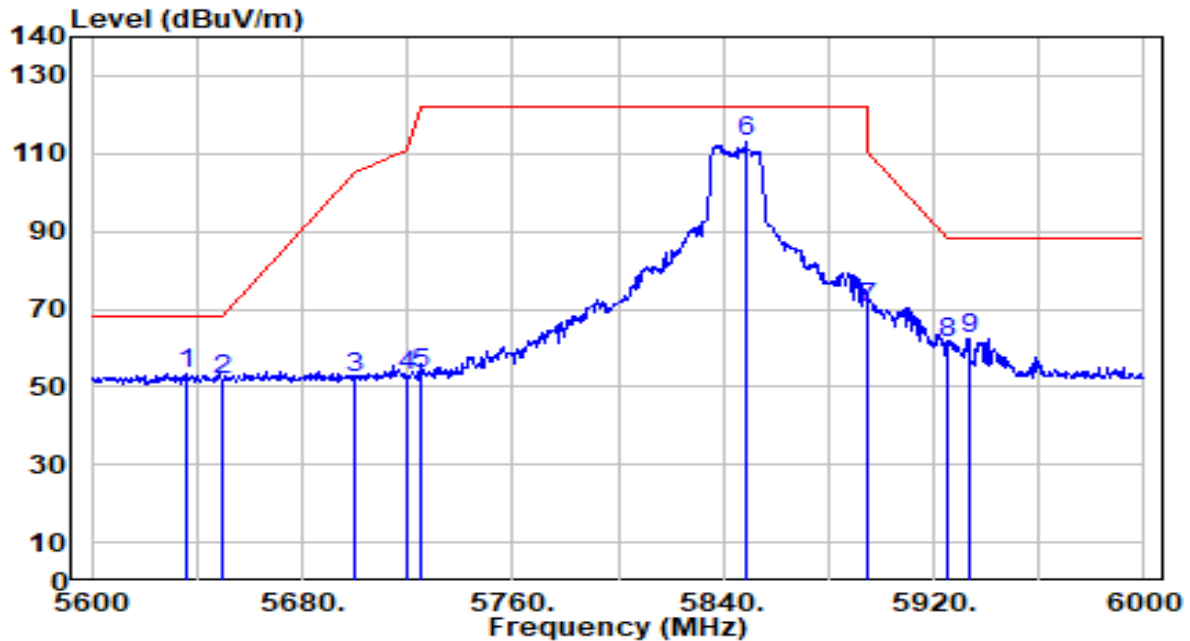


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5636.000	52.08	1.36	53.44	-14.76	68.20	106	99	Peak
2		5650.000	50.56	1.44	52.00	-16.20	68.20	106	99	Peak
3		5700.000	50.34	1.72	52.06	-53.14	105.20	106	99	Peak
4		5720.000	50.93	1.84	52.77	-58.03	110.80	106	99	Peak
5		5725.000	51.62	1.86	53.48	-68.72	122.20	106	99	Peak
6		5848.800	110.56	2.27	112.83	N/A	N/A	106	99	Peak
7		5895.000	68.20	2.26	70.46	-39.74	110.20	106	99	Peak
8		5925.000	58.97	2.25	61.21	-26.99	88.20	106	99	Peak
9		5933.200	60.04	2.24	62.28	-25.92	88.20	106	99	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_242Tone_RU122_Band4_TX_CH 177 ANT 0+1	Test Voltage	By Notebook PC

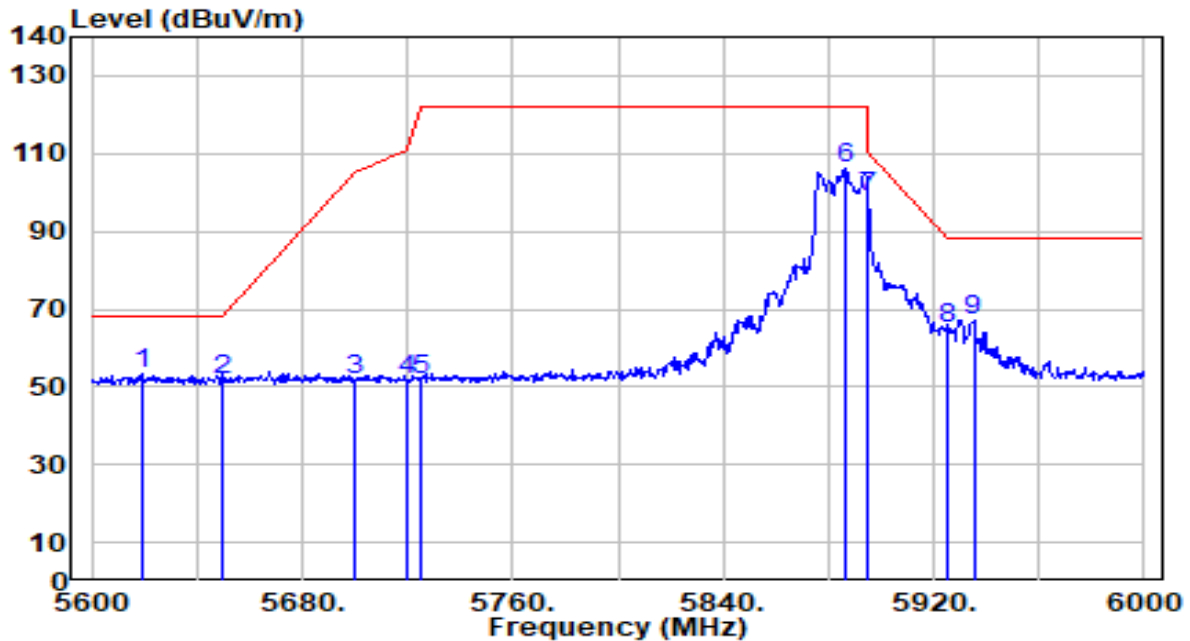


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5618.800	52.20	1.26	53.47	-14.73	68.20	180	219	Peak
2	5650.000	50.08	1.44	51.52	-16.68	68.20	180	219	Peak
3	5700.000	50.04	1.72	51.76	-53.44	105.20	180	219	Peak
4	5720.000	49.91	1.84	51.75	-59.05	110.80	180	219	Peak
5	5725.000	50.14	1.86	52.00	-70.20	122.20	180	219	Peak
6	5886.000	103.98	2.26	106.24	N/A	N/A	180	219	Peak
7	* 5895.000	96.43	2.26	98.68	-11.52	110.20	180	219	Peak
8	5925.000	62.86	2.25	65.11	-23.09	88.20	180	219	Peak
9	5935.200	65.01	2.24	67.25	-20.95	88.20	180	219	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-20
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / You
Test Mode	802.11ax-20MHz_242Tone_RU122_Band4_TX_CH 177 ANT 0+1	Test Voltage	By Notebook PC

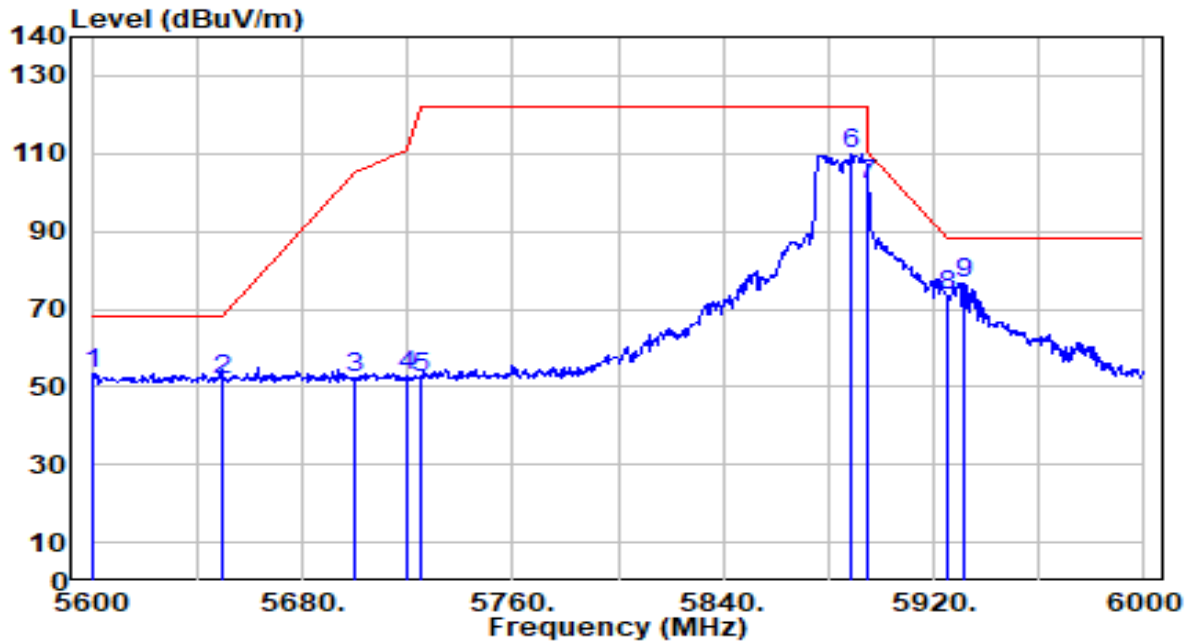


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5600.800	52.42	1.16	53.58	-14.62	68.20	115	25	Peak
2	5650.000	50.31	1.44	51.75	-16.45	68.20	115	25	Peak
3	5700.000	50.33	1.72	52.05	-53.15	105.20	115	25	Peak
4	5720.000	50.79	1.84	52.63	-58.17	110.80	115	25	Peak
5	5725.000	50.63	1.86	52.49	-69.71	122.20	115	25	Peak
6	5888.800	107.47	2.26	109.73	N/A	N/A	115	25	Peak
7	* 5895.000	99.50	2.26	101.75	-8.45	110.20	115	25	Peak
8	5925.000	71.29	2.25	73.54	-14.66	88.20	115	25	Peak
9	5931.200	74.61	2.24	76.85	-11.35	88.20	115	25	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-26
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_Band4_TX_CH 163 ANT 0+1_ verify for S0703	Test Voltage	By Notebook PC

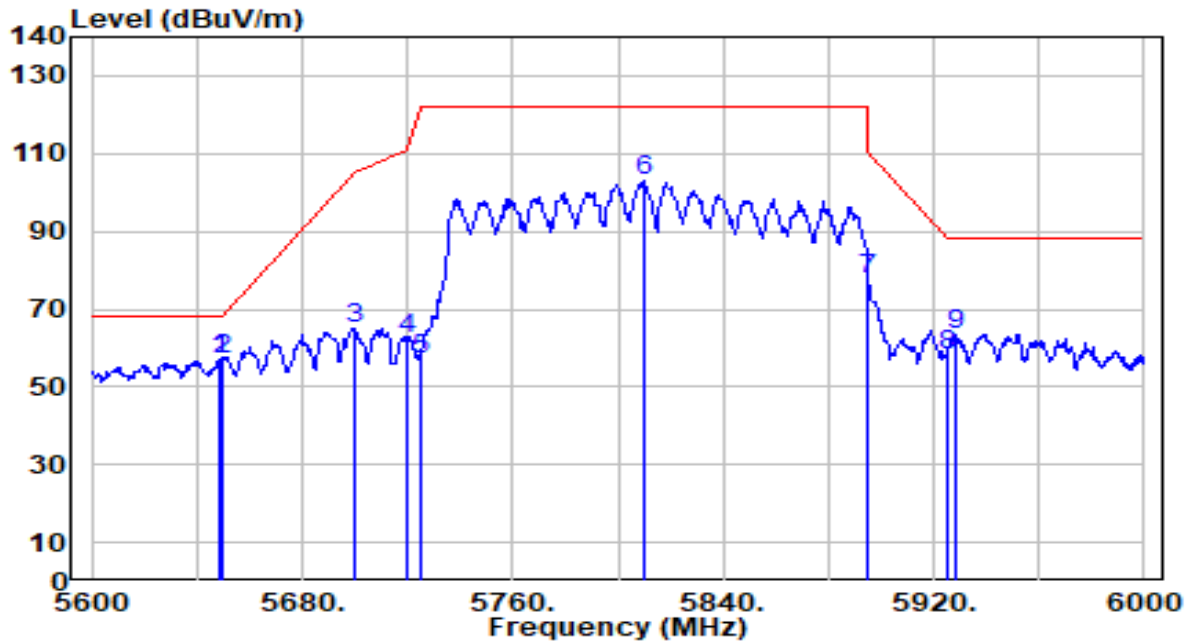


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5648.800	55.50	1.43	56.93	-11.27	68.20	129	271	Peak
2	*	5650.000	55.78	1.44	57.22	-10.98	68.20	129	271	Peak
3		5700.000	63.20	1.72	64.92	-40.28	105.20	129	271	Peak
4		5720.000	60.53	1.84	62.36	-48.44	110.80	129	271	Peak
5		5725.000	55.44	1.86	57.30	-64.90	122.20	129	271	Peak
6		5810.000	100.88	2.28	103.16	N/A	N/A	129	271	Peak
7		5895.000	75.62	2.26	77.87	-32.33	110.20	129	271	Peak
8		5925.000	56.07	2.25	58.31	-29.89	88.20	129	271	Peak
9		5928.800	61.36	2.24	63.61	-24.59	88.20	129	271	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-26
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_Band4_TX_CH 163 ANT 0+1_ verify for S0703	Test Voltage	By Notebook PC

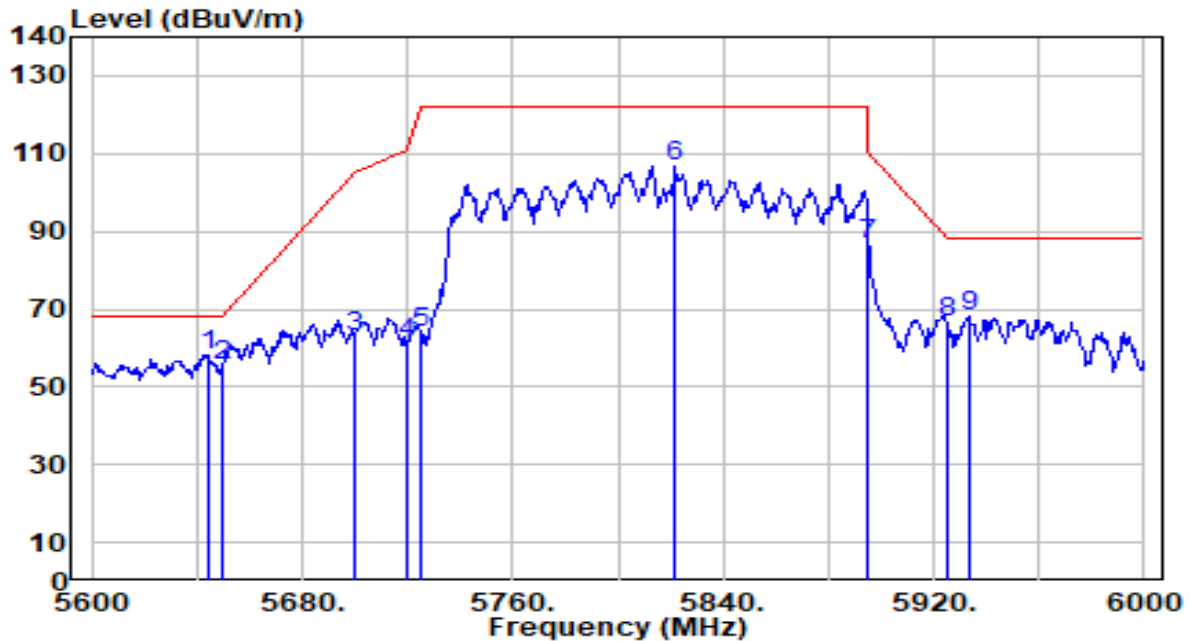


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5644.000	56.87	1.41	58.27	-9.93	68.20	100	209	Peak
2		5650.000	53.94	1.44	55.38	-12.82	68.20	100	209	Peak
3		5700.000	61.29	1.72	63.01	-42.19	105.20	100	209	Peak
4		5720.000	59.48	1.84	61.32	-49.48	110.80	100	209	Peak
5		5725.000	61.98	1.86	63.85	-58.35	122.20	100	209	Peak
6		5822.000	104.65	2.28	106.93	N/A	N/A	100	209	Peak
7		5895.000	84.47	2.26	86.73	-23.47	110.20	100	209	Peak
8		5925.000	64.25	2.25	66.49	-21.71	88.20	100	209	Peak
9		5933.200	65.71	2.24	67.95	-20.25	88.20	100	209	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-26
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-160MHz_Band4_TX_CH 163 ANT 0+1 _ verify for S0803	Test Voltage	By Notebook PC

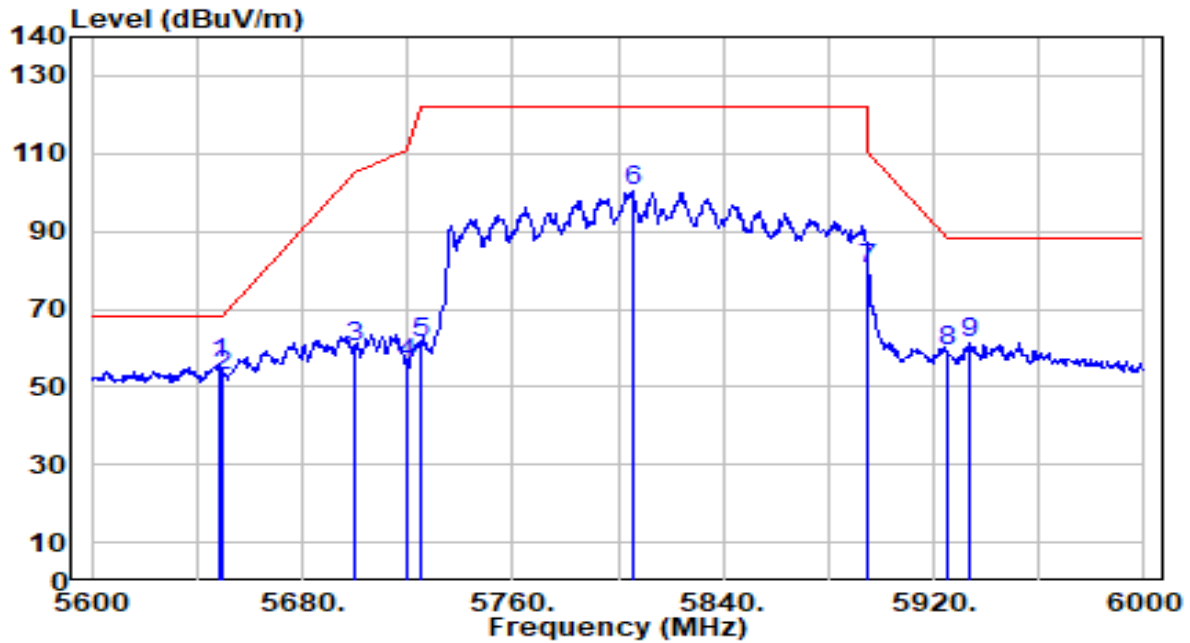


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5648.400	54.61	1.43	56.04	-12.16	68.20	296	0	Peak
2		5650.000	51.58	1.44	53.02	-15.18	68.20	296	0	Peak
3		5700.000	58.30	1.72	60.02	-45.18	105.20	296	0	Peak
4		5720.000	54.33	1.84	56.17	-54.63	110.80	296	0	Peak
5		5725.000	59.17	1.86	61.04	-61.16	122.20	296	0	Peak
6		5805.600	97.90	2.29	100.19	N/A	N/A	296	0	Peak
7		5895.000	78.25	2.26	80.51	-29.69	110.20	296	0	Peak
8		5925.000	56.67	2.25	58.92	-29.28	88.20	296	0	Peak
9		5933.600	58.91	2.24	61.15	-27.05	88.20	296	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-07-26
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-160MHz_Band4_TX_CH 163 ANT 0+1 _ verify for S0803	Test Voltage	By Notebook PC

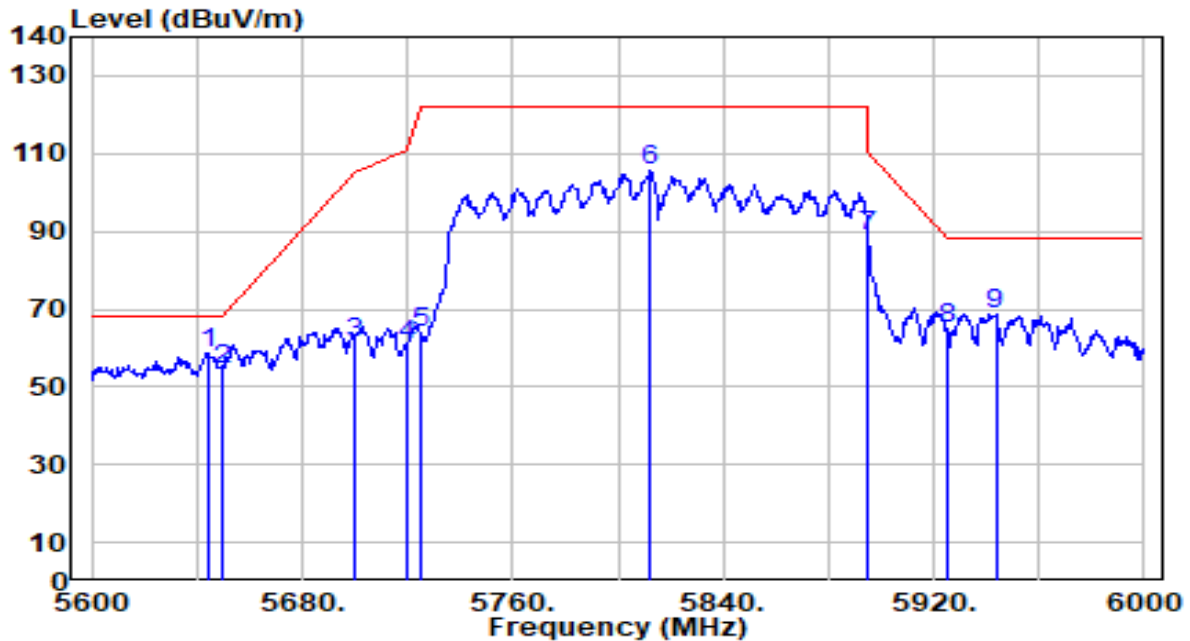

No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5644.800	57.29	1.41	58.70	-9.50	68.20	131	218	Peak
2		5650.000	53.00	1.44	54.43	-13.77	68.20	131	218	Peak
3		5700.000	59.62	1.72	61.34	-43.86	105.20	131	218	Peak
4		5720.000	59.06	1.84	60.89	-49.91	110.80	131	218	Peak
5		5725.000	62.32	1.86	64.18	-58.02	122.20	131	218	Peak
6		5812.000	103.26	2.28	105.54	N/A	N/A	131	218	Peak
7		5895.000	86.26	2.26	88.52	-21.68	110.20	131	218	Peak
8		5925.000	62.85	2.25	65.10	-23.10	88.20	131	218	Peak
9		5943.600	66.38	2.24	68.62	-19.58	88.20	131	218	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.9. AC Conducted Emissions Measurement

7.9.1. Test Limit

FCC Part 15.207 Limits		
Frequency (MHz)	QP (dB μ V)	AV (dB μ V)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.


7.9.2. Test Procedure

The EUT was setup according to ANSI C63.4, 2009 and tested according to KDB 789033 for compliance to FCC 47CFR 15.247 requirements. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs) Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.

The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.


Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

7.9.3. Test Setup

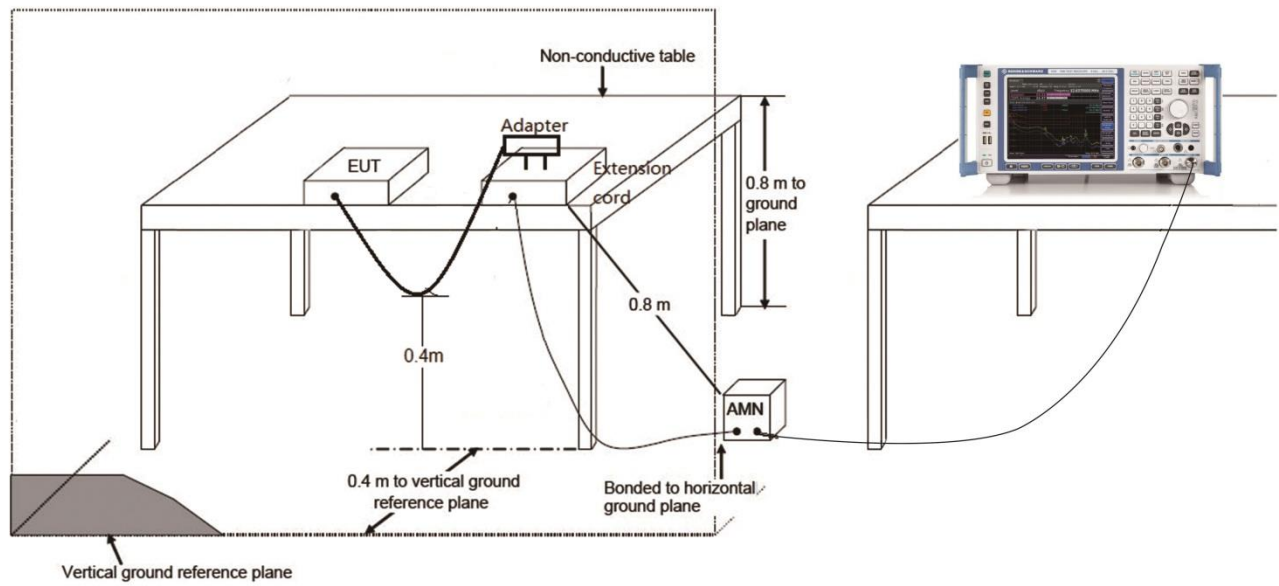

7.9.4.Test Result

EUT	Mobile Computer	Date of Test	2024-06-21
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	26.7°C /50%
Polarity	Line1	Site / Test Engineer	SR2 / Will
Test Mode	802.11ac-20MHz_TX_Band4_CH 173_ANT 0+1	Test Voltage	AC 120V/60Hz

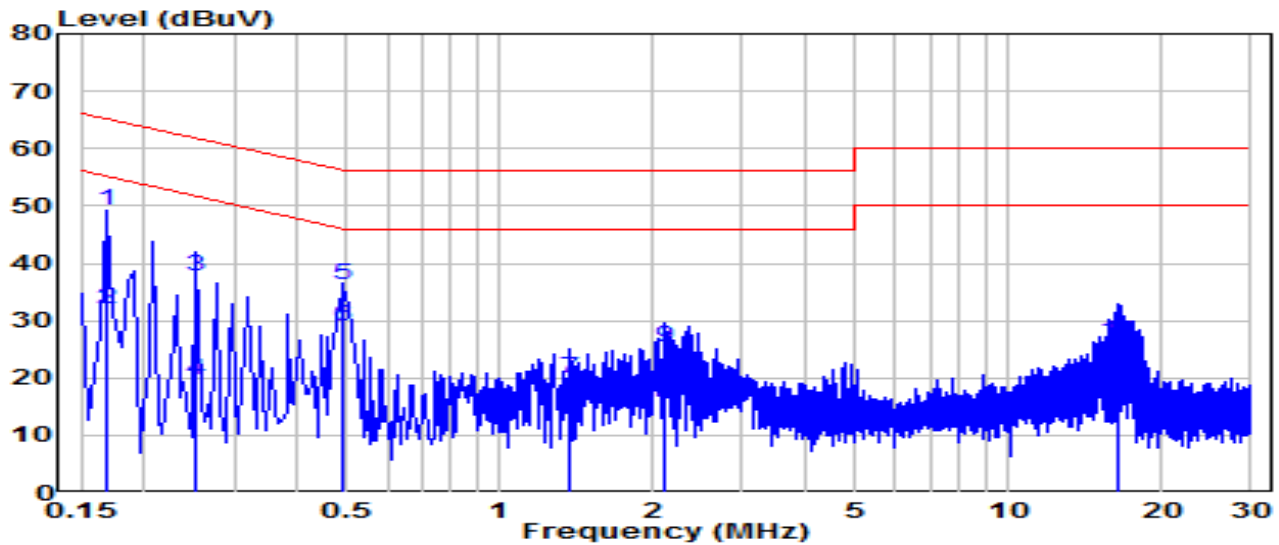


No		Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV)	Margin (dB)	Limit (dBUV)	Remark (QP/PK/AV)
1	*	0.168	39.58	9.63	49.21	-15.85	65.06	QP
2	*	0.168	22.42	9.63	32.05	-23.00	55.06	Average
3		0.253	28.01	9.64	37.65	-24.00	61.64	QP
4		0.253	9.98	9.64	19.62	-32.02	51.64	Average
5		0.492	26.71	9.65	36.36	-19.77	56.13	QP
6		0.492	19.21	9.65	28.87	-17.27	46.13	Average
7		1.365	10.21	9.69	19.90	-36.10	56.00	QP
8		1.365	3.80	9.69	13.49	-32.51	46.00	Average
9		2.107	15.59	9.70	25.29	-30.71	56.00	QP
10		2.107	5.90	9.70	15.60	-30.40	46.00	Average
11		16.416	16.44	9.91	26.36	-33.64	60.00	QP
12		16.416	7.17	9.91	17.08	-32.92	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV) = Reading(dBUV) + C.F (Correction Factor).

EUT	Mobile Computer	Date of Test	2024-06-21
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	26.7°C /50%
Polarity	Neutral	Site / Test Engineer	SR2 / Will
Test Mode	802.11ac-20MHz_TX_Band4_CH 173_ANT 0+1	Test Voltage	AC 120V/60Hz

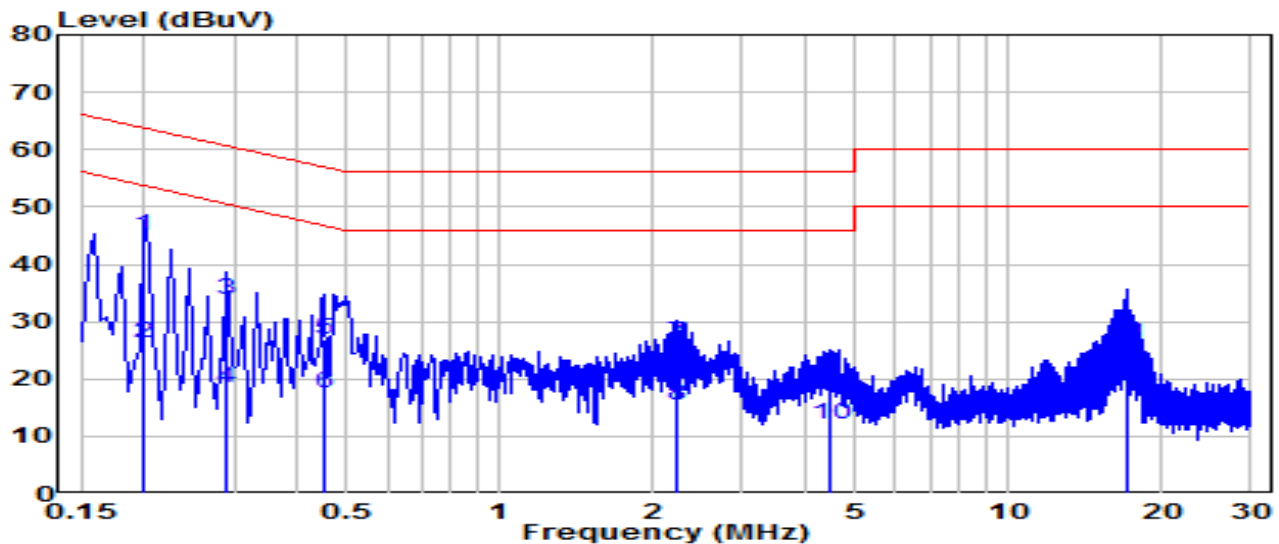


No		Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV)	Margin (dB)	Limit (dBUV)	Remark (QP/PK/AV)
1	*	0.199	35.47	9.63	45.11	-18.52	63.63	QP
2	*	0.199	16.55	9.63	26.18	-27.45	53.63	Average
3		0.289	24.20	9.64	33.83	-26.71	60.54	QP
4		0.289	8.87	9.64	18.51	-32.03	50.54	Average
5		0.451	17.34	9.65	26.99	-29.86	56.85	QP
6		0.451	7.76	9.65	17.41	-29.44	46.85	Average
7		2.242	16.66	9.71	26.37	-29.63	56.00	QP
8		2.242	5.67	9.71	15.38	-30.62	46.00	Average
9		4.474	8.12	9.75	17.87	-38.13	56.00	QP
10		4.474	2.37	9.75	12.12	-33.88	46.00	Average
11		17.059	16.02	9.96	25.99	-34.01	60.00	QP
12		17.059	8.43	9.96	18.40	-31.60	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV) = Reading(dBUV) + C.F (Correction Factor).

EUT	Mobile Computer	Date of Test	2024-06-21
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	26.7°C /50%
Polarity	Line1	Site / Test Engineer	SR2 / Will
Test Mode	802.11ac-20MHz_TX_Band4_CH 173_ANT 0+1	Test Voltage	AC 240V/60Hz

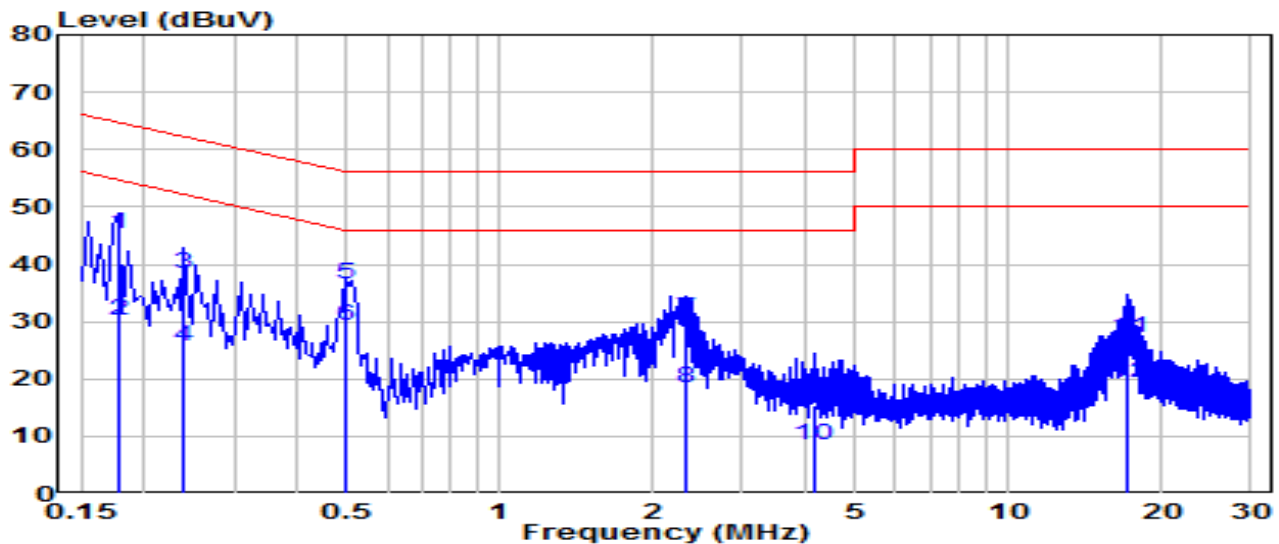


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.177	35.60	9.63	45.23	-19.40	64.63	QP
2	0.177	20.66	9.63	30.29	-24.33	54.63	Average
3	0.240	28.68	9.64	38.32	-23.78	62.10	QP
4	0.240	16.08	9.64	25.71	-26.38	52.10	Average
5	* 0.496	26.86	9.65	36.52	-19.54	56.06	QP
6	* 0.496	19.49	9.65	29.15	-16.91	46.06	Average
7	2.328	20.88	9.70	30.59	-25.41	56.00	QP
8	2.328	8.79	9.70	18.49	-27.51	46.00	Average
9	4.132	5.81	9.73	15.55	-40.45	56.00	QP
10	4.132	-1.25	9.73	8.48	-37.52	46.00	Average
11	17.212	17.31	9.92	27.22	-32.78	60.00	QP
12	17.212	9.41	9.92	19.33	-30.67	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	Mobile Computer	Date of Test	2024-06-21
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	26.7°C /50%
Polarity	Neutral	Site / Test Engineer	SR2 / Will
Test Mode	802.11ac-20MHz_TX_Band4_CH 173_ANT 0+1	Test Voltage	AC 240V/60Hz

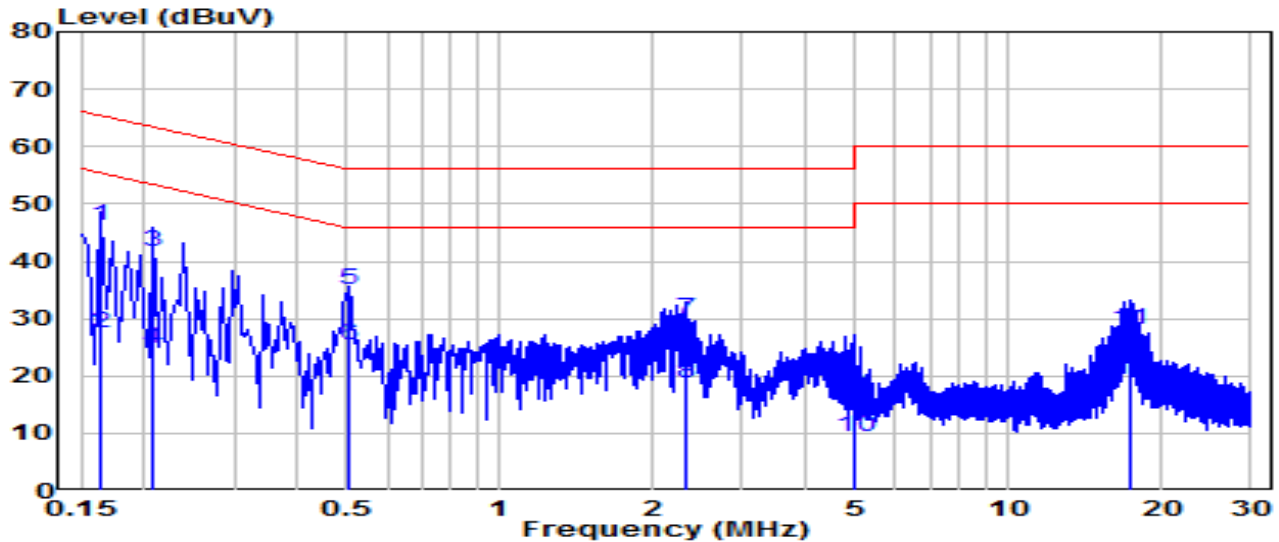

No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	*	0.163	36.67	9.63	46.30	-18.99	65.28	QP
2	*	0.163	17.92	9.63	27.55	-27.74	55.28	Average
3		0.208	31.97	9.63	41.60	-21.66	63.27	QP
4		0.208	15.24	9.63	24.88	-28.39	53.27	Average
5		0.505	25.33	9.65	34.98	-21.02	56.00	QP
6		0.505	15.80	9.65	25.45	-20.55	46.00	Average
7		2.314	20.16	9.71	29.87	-26.13	56.00	QP
8		2.314	9.15	9.71	18.86	-27.14	46.00	Average
9		4.978	7.21	9.76	16.96	-39.04	56.00	QP
10		4.978	-0.28	9.76	9.48	-36.52	46.00	Average
11		17.307	18.12	9.97	28.09	-31.91	60.00	QP
12		17.307	9.26	9.97	19.23	-30.77	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

8. CONCLUSION

The data collected relate only the item(s) tested and show that the device is in compliance with Part 15E of the FCC Rules.

The End

Appendix A : Test Setup Photograph

Refer to “2405TW0107-UT” file.

Appendix B : EUT Photograph

Refer to “2405TW0107-UE” file.

Appendix C : Internal Photograph

Refer to “2405TW0107-UI” file.