

RF MEASUREMENT REPORT

C2PC

FCC ID : HD5-CK67X0N
Applicant : Honeywell International Inc
Application Type : Certification
Product : Mobile Computer
Model No. : CK67X0N
Brand Name : Honeywell
FCC Classification : 15E 6GHz Dual Client (6CD)
FCC Rule Part(s) : Part 15 Subpart E (Section 15.407)
Received Date : November 29, 2024
Test Date : December 24, 2024~ December 26, 2024

Tested By : Owen Tsai
(Owen Tsai)
Reviewed By : Paddy Chen
(Paddy Chen)
Approved By : Chenz Ker
(Chenz Ker)



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in KDB789033. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Taiwan) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
2411TW0118-U7	1.0	Original Report	2025-01-09	

Note:

- The original report is 2405TW0107-U8, the changes are as follows, so the FCC C2PC is executed.
 - Add Cold-Storage (CS) version.
 - Add heather function.
 - Replace uMCP via UFS and memory.
 - New shielding can design for 2nd BT (RF circuit w/o changed.).
- Original report Grant Date: 09/30/2024, FCC ID: HD5-CK67X0N.

CONTENTS

Description	Page
1. INTRODUCTION	7
1.1. Scope	7
1.2. MRT Test Location.....	7
2. Product Information	8
2.1. Equipment Description.....	8
2.2. Radio Specification	9
2.3. Working Frequencies	9
2.4. Antenna Details.....	11
2.5. Test Mode	12
2.6. Test System Connection Diagram	13
2.7. Test System Details	14
2.8. Test Software	15
2.9. Applied Standards.....	15
2.10. Duty Cycle.....	16
2.11. Test Environment Condition	17
3. Antenna Requirements	18
4. Measuring Instrument	19
5. Measurement Uncertainty.....	20
6. Test Result.....	21
6.1. Summary	21
6.2. 26dB Bandwidth	22
6.2.1. Test Limit.....	22
6.2.2. Test Procedure used.....	22
6.2.3. Test Setting	22
6.2.4. Test Setup.....	23
6.2.5. Test Result	24
6.3. Output Power	25
6.3.1. Test Limit	25
6.3.2. Test Procedure Used	25
6.3.3. Test Setting	25
6.3.4. Test Setup	25
6.3.5. Test Result	26
6.4. Power Spectral Density.....	29
6.4.1. Test Limit	29
6.4.2. Test Procedure Used	29

6.4.3.	Test Setting	29
6.4.4.	Test Setup	30
6.4.5.	Test Result	31
6.5.	In-Band Emission Measurement.....	32
6.5.1.	Test Limit	32
6.5.2.	Test Procedure used	32
6.5.3.	Test Setting	32
6.5.4.	Test Setup	33
6.5.5.	Test Result	34
6.6.	Frequency Stability Measurement	35
6.6.1.	Test Limit	35
6.6.2.	Test Procedure	35
6.6.3.	Test Setup	36
6.6.4.	Test Result	37
6.7.	Contention Based Protocol	38
6.7.1.	Test Limit	38
6.7.2.	Test Procedure Used	38
6.7.3.	Test Setting	38
6.7.4.	Test Setup	39
6.7.5.	Test Result	40
6.8.	Radiated Spurious Emission.....	41
6.8.1.	Test Limit	41
6.8.2.	Test Procedure Used	41
6.8.3.	Test Setting	41
6.8.4.	Test Setup	43
6.8.5.	Test Result	44
6.9.	Radiated Restricted Band Edge	52
6.9.1.	Test Limit	52
6.9.2.	Test Procedure Used	53
6.9.3.	Test Setting	53
6.9.4.	Test Setup	54
6.9.5.	Test Result	55
6.10.	AC Conducted Emissions	71
6.10.1.	Test Limit.....	71
6.10.2.	Test Setup.....	71
6.10.3.	Test Result.....	72
6.11.	Dual Client Test, Demonstration of Proper Power Adjustment based on Associated AP	73
6.11.1.	Test Limit.....	73
6.11.2.	Test Result.....	73

6.12.	Proper Power Adjustment, Client Devices Connected to a Standard Power Access Point ...	74
6.12.1.	Test Limit.....	74
6.12.2.	Test Result	74
7.	Conclusion	75
Appendix A : Test Setup Photograph		76
Appendix B : External Photograph		76
Appendix C : Internal Photograph		76

General Information

Applicant	Honeywell International Inc
Applicant Address	9680 Old Bailes Rd. Fort Mill, SC 29707 United States
Manufacturer	Honeywell International Inc
Manufacturer Address	9680 Old Bailes Rd. Fort Mill, SC 29707 United States
Test Site	MRT Technology (Taiwan) Co., Ltd
Test Site Address	No. 38, Fuxing Second Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C)
MRT FCC Registration No.	291082
FCC Rule Part(s)	Part 15.407
Test Device Serial No.	#1-1 ☐ Production ☒ Pre-Production ☐ Engineering

Test Facility / Accreditations

1. MRT facility is a FCC registered (Reg. No. 291082) test facility with the site description report on file and is designated by the FCC as an Accredited Test Firm.
2. MRT facility is an IC registered (MRT Reg. No. 21723) test laboratory with the site description on file at Industry Canada.
3. MRT Lab is accredited to ISO 17025 by the Taiwan Accreditation Foundation (TAF Cert. No. 3261) in EMC, Telecommunications and Radio testing for FCC (Designation Number: TW3261), Industry Canada, EU and TELEC Rules.


1. INTRODUCTION

1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada and Certification and Engineering Bureau.

1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taoyuan City. These measurement tests were conducted at the MRT Technology (Taiwan) Co., Ltd. Facility located at No.38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 33377, Taiwan (R.O.C).

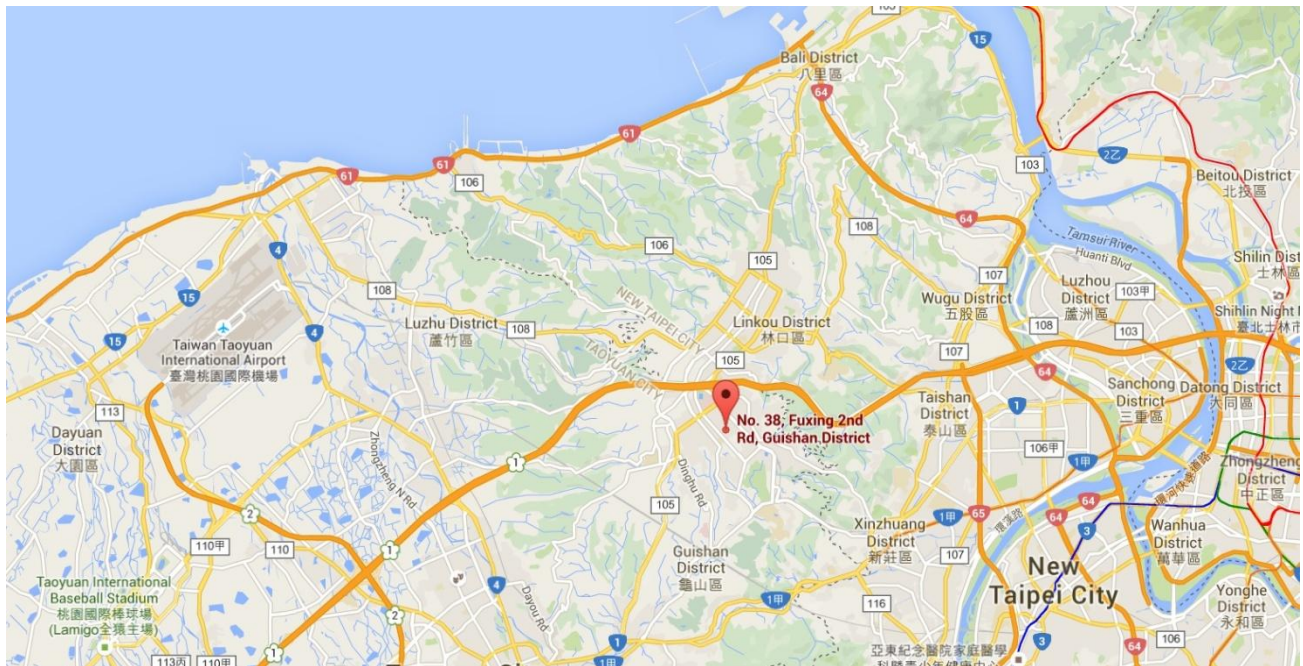

2. Product Information

2.1. Equipment Description

Product Name	Mobile Computer
Model No.	CK67X0N
Brand Name	Honeywell
Wi-Fi Specification	802.11a/b/g/n/ac/ax
Bluetooth Specification	Main BT/BLE : V5.3 dual mode + 2nd BLE: V5.3 Single mode
NFC Specification	13.56MHz
Antenna Information	Refer to section 1.7
EUT Identification No.:	#24295D8146 (Conducted) #24295D8143 (Radiated)
Accessory	
Battery	Brand: Honeywell MODEL:CK65-BTCS Rating: 3.6Vdc, 5200mAh, 18.7Wh
Remark:	
1. The information of EUT was provided by the manufacturer, and the accuracy of the information shall be the responsibility of the manufacturer.	

Note:

- For other features of this EUT, test report will be issued separately.
- This product has 3 scanners, 5 keypads, can refer as below:

Scanner	S0703	S0803FR	S0803	--	--
Keypad	Alpha Numeric	Numeric	Large Numeric	53keys Alpha Numeric	42keys Numeric

- This report selected S0803FR with Alpha Numeric as the main test.

2.2. Radio Specification

Frequency Range	For 802.11a/ax-HE20: 5935 ~ 7115MHz For 802.11ax-HE40: 5965 ~ 7085MHz For 802.11ax-HE80: 5985 ~ 7025MHz For 802.11ax-HE160: 6025 ~ 6985MHz
Type of Modulation	802.11a: OFDM 802.11ax: OFDMA
Data Rate	802.11a: 6/9/12/18/24/36/48/54Mbps 802.11ax: up to 2402Mbps

Note: For other features of this EUT, test report will be issued separately.

2.3. Working Frequencies

802.11a/ax-HE20

Channel	Frequency	Channel	Frequency	Channel	Frequency
2	5935 MHz	1	5955 MHz	5	5975 MHz
9	5995 MHz	13	6015 MHz	17	6035 MHz
21	6055 MHz	25	6075 MHz	29	6095 MHz
33	6115 MHz	37	6135 MHz	41	6155 MHz
45	6175 MHz	49	6195 MHz	53	6215 MHz
57	6235 MHz	61	6255 MHz	65	6275 MHz
69	6295 MHz	73	6315 MHz	77	6335 MHz
81	6355 MHz	85	6375 MHz	89	6395 MHz
93	6415 MHz	97	6435 MHz	101	6455 MHz
105	6475 MHz	109	6495 MHz	113	6515 MHz
117	6535 MHz	121	6555 MHz	125	6575 MHz
129	6595 MHz	133	6615 MHz	137	6635 MHz
141	6655 MHz	145	6675 MHz	149	6695 MHz
153	6715 MHz	157	6735 MHz	161	6755 MHz
165	6775 MHz	169	6795 MHz	173	6815 MHz
177	6835 MHz	181	6855 MHz	185	6875 MHz
189	6895 MHz	193	6915 MHz	197	6935 MHz
201	6955 MHz	205	6975 MHz	209	6995 MHz
213	7015 MHz	217	7035 MHz	221	7055 MHz
225	7075 MHz	229	7095 MHz	233	7115 MHz

802.11ax-HE40

Channel	Frequency	Channel	Frequency	Channel	Frequency
3	5965 MHz	11	6005 MHz	19	6045 MHz
27	6085 MHz	35	6125 MHz	43	6165 MHz
51	6205 MHz	59	6245 MHz	67	6285 MHz
75	6325 MHz	83	6365 MHz	91	6405 MHz
99	6445 MHz	107	6485 MHz	115	6525 MHz
123	6565 MHz	131	6605 MHz	139	6645 MHz
147	6685 MHz	155	6725 MHz	163	6765 MHz
171	6805 MHz	179	6845 MHz	187	6885 MHz
195	6925 MHz	203	6965 MHz	211	7005 MHz
219	7045 MHz	227	7085 MHz	--	--

802.11ax-HE80

Channel	Frequency	Channel	Frequency	Channel	Frequency
7	5985 MHz	23	6065 MHz	39	6145 MHz
55	6225 MHz	71	6305 MHz	87	6385 MHz
103	6465 MHz	119	6545 MHz	135	6625 MHz
151	6705 MHz	167	6785 MHz	183	6865 MHz
199	6945 MHz	215	7025 MHz	--	--

802.11ax-HE160

Channel	Frequency	Channel	Frequency	Channel	Frequency
15	6025 MHz	47	6185 MHz	79	6345 MHz
111	6505 MHz	143	6665 MHz	175	6825 MHz
207	6985 MHz		--	--	--

2.4. Antenna Details

Antenna Type	Frequency Band (MHz)	T _x Paths	Number of spatial streams	Max Antenna Gain (dBi)	Beamforming Directional Gain(dBi)	CDD Directional Gain (dBi)	
						For Power	For PSD
Wi-Fi Antenna							
PIFA	2412 ~ 2462	2	1	3.00	--	3.00	5.67
	5150 ~ 5250	2	1	2.50	--	2.50	5.07
	5250 ~ 5350	2	1	2.40	--	2.40	5.16
	5470 ~ 5725	2	1	2.70	--	2.70	5.42
	5725 ~ 5850	2	1	2.60	--	2.60	5.61
	5850 ~ 5895	2	1	2.60	--	2.60	5.61
	5925 ~ 6425	2	1	3.00	--	3.00	5.86
	6425 ~ 6525	2	1	3.00	--	3.00	5.86
	6525 ~ 6875	2	1	4.00	--	4.00	6.52
	6875 ~ 7125	2	1	3.90	--	3.90	6.81

Remark:

- The EUT supports Cyclic Delay Diversity (CDD) mode, and CDD signals are correlated.

If antenna gains are not equal, the user may use either of the following methods to calculate directional gain, provided that each transmit antenna is driven by only one spatial stream follows.

- For power spectral density (PSD) measurements on all devices,

$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

- For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB for $N_{ANT} \leq 4$;

- All messages of antenna were declared by manufacturer.


Test Mode	T _x Paths	CDD Mode	Beamforming Mode
802.11b/g/n (DTS)	2	√	X
802.11ax (DTS)	2	√	X
802.11a/n (NII)	2	√	X
802.11ac/ax (NII)	2	√	X
802.11ax (6CD)	2	√	X

2.5. Test Mode

CDD Mode
Mode 1: Transmit by 802.11a_ (CDD mode)
Mode 2: Transmit by 802.11ax-HE20_ (CDD mode)
Mode 3: Transmit by 802.11ax-HE40_ (CDD mode)
Mode 4: Transmit by 802.11ax-HE80_ (CDD mode)
Mode 5: Transmit by 802.11ax-HE160_ (CDD mode)
Mode 6: Transmit by 802.11ax-HE20_26Tone_RU0 (CDD mode)
Mode 7: Transmit by 802.11ax-HE20_26Tone_RU8 (CDD mode)
Mode 8: Transmit by 802.11ax-HE20_52Tone_RU74 (CDD mode)
Mode 9: Transmit by 802.11ax-HE20_52Tone_RU77 (CDD mode)
Mode 10: Transmit by 802.11ax-HE20_106Tone_RU106 (CDD mode)
Mode 11: Transmit by 802.11ax-HE20_106Tone_RU107 (CDD mode)
Mode 12: Transmit by 802.11ax-HE20_242Tone_RU122 (CDD mode)
Mode 13: Transmit by 802.11ax-HE20_242Tone_RU122 (CDD mode)
Remark: 1. For Radiated emission, the modulation and the data rate picked for testing are determined by the Max. RF conducted power.

2.6. Test System Connection Diagram

The device was tested per the guidance ANSI C63.10: 2013 was used to reference the appropriate EUT setup for radiated emissions testing and AC line conducted testing.

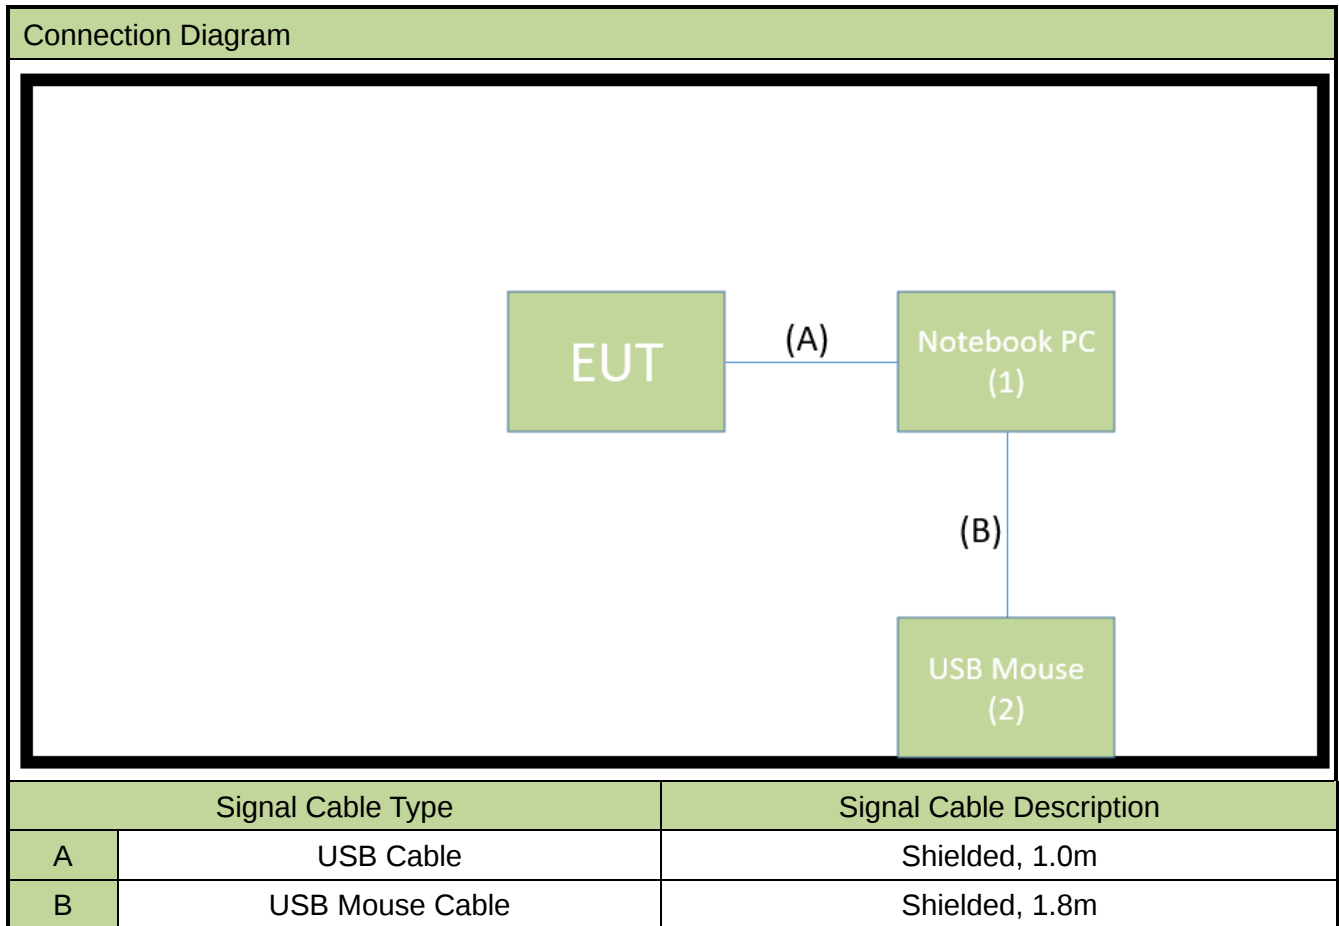

2.7. Test System Details

Product		Manufacturer	Model No.	Serial No.	Power Cord
1	Notebook PC	DELL	P65F	N/A	Non-shielded, 0.8m
2	USB Mouse	Logitech	M90	N/A	N/A

2.8. Test Software

The test utility software used during testing was “QRCT”, the version is ver4.0-00209.

Note: Final power setting please refer to operational description.

2.9. Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ANSI C63.10-2013
- FCC KDB 789033 D02v02r01
- FCC KDB 987594 D02v01r01
- FCC KDB 987594 D04v02
- FCC KDB 662911 D01v02r01
- FCC KDB 414788 D01v01r01
- FCC KDB 412172 D01v01r01

2.10. Duty Cycle

The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz. The RBW and VBW were both greater than $50/T$, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Test Mode	Duty Cycle
802.11a	99.34%
802.11ax-HE20	99.82%
802.11ax-HE40	98.96%
802.11ax-HE80	98.71%
802.11ax-HE160	98.84%

2.11. Test Environment Condition

Ambient Temperature	15°C~35°C
Relative Humidity	20%RH ~75%RH

3. Antenna Requirements

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

The antenna of the device is built in and locked inside the enclosure.

Conclusion:

The device complies with the requirement of §15.407(a)(9).

4. Measuring Instrument

Conducted Emissions

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Two-Line V-Network	R&S	ENV216	MRTTWA00020	1 year	2025/4/21
EMI Test Receiver	R&S	ESR3	MRTTWA00009	1 year	2025/3/5
Cable	Rosnol	N1C50-RG400-B 1C50-500CM	MRTTWE00013	1 year	2025/6/14

Radiated Emissions

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Active Loop Antenna	SCHWARZBECK	FMZB 1519B	MRTTWA00002	1 year	2025/5/7
Broadband TRILOG Antenna	SCHWARZBECK	VULB 9162	MRTTWA00086	1 year	2025/11/5
Broadband Hornantenna	RFSPIN	DRH18-E	MRTTWA00087	1 year	2025/5/20
Broadband Preamplifier	EMC Instruments corporation	EMC118A45SE	MRTTWA00088	1 year	2025/5/14
Breitband Hornantenna	SCHWARZBECK	BBHA 9170	MRTTWA00004	1 year	2025/3/26
Broadband Amplifier	SCHWARZBECK	BBV 9721	MRTTWA00006	1 year	2025/3/21
EMI Test Receiver	R&S	ESR3	MRTTWA00009	1 year	2025/3/5
Signal Analyzer	R&S	FSVA3044	MRTTWA00092	1 year	2025/6/20
Antenna Cable	HUBERSUHNER	SF106	MRTTWE00034	1 year	2025/6/25
Cable	HUBERSUHNER	EMC105-NM-NM -3000	MRTTWE00035	1 year	2025/6/25
Temperature/Humidity Meter	TFA	35.1083	MRTTWA00050	1 year	2025/6/2

Conducted Test Equipment

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EXA Signal Analyzer	KEYSIGHT	N9010A	MRTTWA00012	1 year	2025/9/24
EXA Signal Analyzer	KEYSIGHT	N9010B	MRTTWA00074	1 year	2025/8/12
USB Wideband Power Sensor	KEYSIGHT	U2021XA	MRTTWA00015	1 year	2025/3/12
Vector Signal Generator	KEYSIGHT	N5182B	MRTTWA00010	1 year	2025/5/21
EXA Analog Signal Generator	KEYSIGHT	N5173B	MRTTWA00072	1 year	2025/5/21
Temperature & Humidity Chamber	TEN BILLION	TTH-B3UP	MRTTWA00036	1 year	2025/6/6

Test Software

Software	Version	Function
e3	9.160520a	EMI Test Software

5. Measurement Uncertainty

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

AC Conducted Emission Measurement
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 150kHz~30MHz: $\pm 2.53\text{dB}$
Radiated Emission Measurement
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 9kHz ~ 1GHz: $\pm 4.25\text{dB}$ 1GHz ~ 40GHz: $\pm 4.45\text{dB}$
Conducted Power (Carrier Power / Power Density)
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): $\pm 0.84\text{dB}$
Conducted Spurious Emission
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): $\pm 2.65\text{ dB}$
Occupied Bandwidth
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): $\pm 3.3\%$
Temp. / Humidity
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): $\pm 0.82^\circ\text{C} / \pm 3\%$
Frequency Error
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): $\pm 78.4\text{Hz}$

6. Test Result

6.1. Summary

FCC Section(s)	Test Description	Test Condition	Verdict	Reference
15.407(a)	26dB Bandwidth	Conducted	N/A	Section6.2
15.407(a)(7), (a)(8)	Maximum Equivalent Isotropically Radiated Power (E.I.R.P)		Pass (17.27dBm@EIRP)	Section6.3
15.407(a)(7), (a)(8)	Peak Power Spectral Density (E.I.R.P)		N/A	Section6.4
15.407(b)(7)	In-Band Emission		N/A	Section6.5
15.407(g)	Frequency Stability		N/A	Section6.6
15.407(d)(6)	Contention-Based Protocol		N/A	Section6.7
15.407(b)(5)	Unwanted Emissions	Radiated	Pass (47.89dBuV/m@Peak)	Section6.8
15.407(b) (8), (9), (10)	General Field Strength (Restricted Bands and Radiated Emission)		Pass (67.24dBuV/m@avg)	Section6.9
15.207	AC Conducted Emissions 150kHz - 30MHz	Line Conducted	N/A	Section6.10

Remark:

- Determining compliance is based on the test results met the regulation limits or requirements declared by clients, and the test results don't take into account the value of measurement uncertainty.
- The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- Output power test was verified over all data rates of each mode (data refers to operational description), and then choose the maximum power output (low data rate) for final test of each channel.
- For radiated emission test, the test results shown in the following sections represent the worst-case emissions.

6.2. 26dB Bandwidth

6.2.1. Test Limit

N/A

6.2.2. Test Procedure used

KDB 789033 D02v02r01- Section C.1 (26dB Bandwidth)

KDB 789033 D02v02r01- Section D (99% Bandwidth)

6.2.3. Test Setting


26dB Bandwidth

1. The analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 26$. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediated power nulls in the fundamental emission.
2. RBW = approximately 1% of the emission bandwidth.
3. VBW > RBW.
4. Detector = Peak.
5. Trace mode = max hold.

99% Bandwidth

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1% to 5% of the OBW
4. Set VBW $\geq 3 \times$ RBW
5. Detector = Peak.
6. Use the 99% power bandwidth function of the instrument.

6.2.4. Test Setup

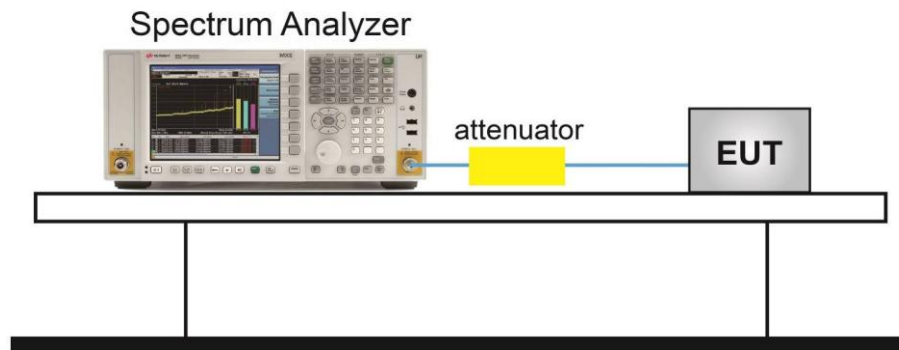

6.2.5. Test Result

Note: Reference original report Grant Date: 08/27/2024, FCC ID: HD5-CK67X0N.

6.3. Output Power

6.3.1. Test Limit

For an indoor access point operating in the 5.925-7.125 GHz band, the maximum e.i.r.p. over the frequency band of operation must not exceed 30 dBm.

For a subordinate device operating under the control of an indoor access point in the 5.925-7.125 GHz band, the maximum e.i.r.p. over the frequency band of operation must not exceed 30 dBm.

6.3.2. Test Procedure Used


KDB 789033D02v02r01- Section E)3)b) Method PM-G

6.3.3. Test Setting

Average Power Measurement

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.

6.3.4. Test Setup

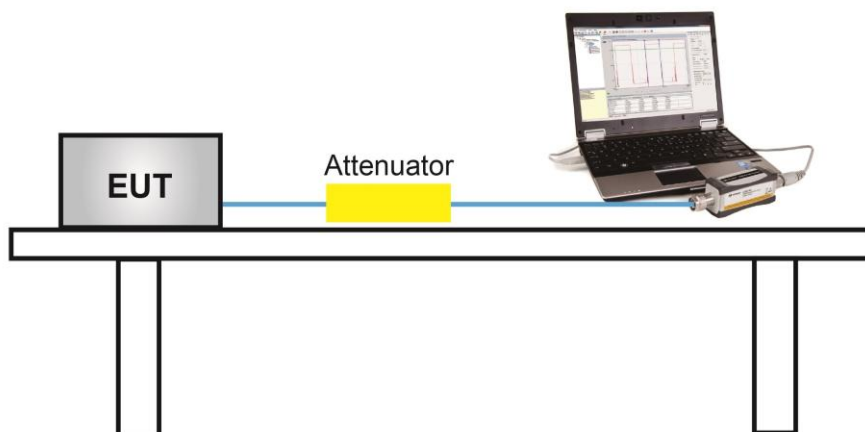

6.3.5. Test Result

Test Site	SR6	Test Engineer	Owen
Test Date	2024/12/26		

Client Low Power Indoor

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Average Power (dBm)		Gain (dBi)	Total EIRP Power (dBm)	EIRP Limit (dBm)
	Ant 0			Ant 1				
CDD mode								
11a	MCS0	2	5935	-2.13	-0.35	3.00	4.86	≤ 24.00
11a	MCS0	1	5955	-1.81	0.20	3.00	5.32	≤ 24.00
11a	MCS0	49	6195	-1.56	0.00	3.00	5.30	≤ 24.00
11a	MCS0	93	6415	-2.55	0.01	3.00	4.93	≤ 24.00
11a	MCS0	97	6435	-1.89	0.32	3.00	5.36	≤ 24.00
11a	MCS0	105	6475	-2.18	0.30	3.00	5.24	≤ 24.00
11a	MCS0	113	6515	-1.94	0.40	3.00	5.40	≤ 24.00
11a	MCS0	117	6535	-2.94	-0.24	4.00	5.63	≤ 24.00
11a	MCS0	153	6715	-3.00	-0.77	4.00	5.27	≤ 24.00
11a	MCS0	181	6855	-3.05	-1.01	4.00	5.10	≤ 24.00
11a	MCS0	185	6875	-3.15	-1.14	3.90	4.88	≤ 24.00
11a	MCS0	189	6895	-2.39	-0.40	3.90	5.63	≤ 24.00
11a	MCS0	213	7015	-1.94	0.03	3.90	6.07	≤ 24.00
11a	MCS0	229	7095	-2.20	-0.03	3.90	5.93	≤ 24.00
11a	MCS0	233	7115	-2.37	-0.17	3.90	5.78	≤ 24.00
11ax-HE20	MCS0	2	5935	-8.52	-7.07	3.00	-1.72	≤ 24.00
11ax-HE20	MCS0	1	5955	-1.56	0.43	3.00	5.56	≤ 24.00
11ax-HE20	MCS0	49	6195	-0.85	0.94	3.00	6.15	≤ 24.00
11ax-HE20	MCS0	93	6415	-1.42	1.35	3.00	6.19	≤ 24.00
11ax-HE20	MCS0	97	6435	-1.27	1.02	3.00	6.03	≤ 24.00
11ax-HE20	MCS0	105	6475	-1.54	0.99	3.00	5.92	≤ 24.00
11ax-HE20	MCS0	113	6515	-1.27	1.06	3.00	6.06	≤ 24.00
11ax-HE20	MCS0	117	6535	-1.97	0.37	4.00	6.37	≤ 24.00
11ax-HE20	MCS0	153	6715	-2.39	0.00	4.00	5.98	≤ 24.00
11ax-HE20	MCS0	181	6855	-2.39	-0.28	4.00	5.80	≤ 24.00
11ax-HE20	MCS0	185	6875	-2.47	-0.44	3.90	5.57	≤ 24.00
11ax-HE20	MCS0	189	6895	-2.16	-0.27	3.90	5.80	≤ 24.00

11ax-HE20	MCS0	213	7015	-2.29	-0.27	3.90	5.75	≤ 24.00
11ax-HE20	MCS0	229	7095	-2.49	-0.40	3.90	5.59	≤ 24.00
11ax-HE20	MCS0	233	7115	-8.72	-7.12	3.90	-0.94	≤ 24.00
11ax-HE40	MCS0	3	5965	1.54	3.56	3.00	8.68	≤ 24.00
11ax-HE40	MCS0	51	6205	2.83	4.32	3.00	9.65	≤ 24.00
11ax-HE40	MCS0	91	6405	2.87	4.70	3.00	9.89	≤ 24.00
11ax-HE40	MCS0	99	6445	2.90	4.97	3.00	10.07	≤ 24.00
11ax-HE40	MCS0	107	6485	2.83	4.78	3.00	9.92	≤ 24.00
11ax-HE40	MCS0	115	6525	2.15	4.03	3.00	9.20	≤ 24.00
11ax-HE40	MCS0	123	6565	0.79	3.08	4.00	9.09	≤ 24.00
11ax-HE40	MCS0	147	6685	0.19	2.71	4.00	8.64	≤ 24.00
11ax-HE40	MCS0	179	6845	0.91	2.80	4.00	8.97	≤ 24.00
11ax-HE40	MCS0	187	6885	0.39	2.15	3.90	8.27	≤ 24.00
11ax-HE40	MCS0	195	6925	0.68	2.78	3.90	8.77	≤ 24.00
11ax-HE40	MCS0	211	7005	-0.04	2.62	3.90	8.40	≤ 24.00
11ax-HE40	MCS0	227	7085	-0.61	2.38	3.90	8.05	≤ 24.00
11ax-HE80	MCS0	7	5985	3.86	5.76	3.00	10.92	≤ 24.00
11ax-HE80	MCS0	55	6225	4.60	6.18	3.00	11.47	≤ 24.00
11ax-HE80	MCS0	87	6385	4.24	6.21	3.00	11.35	≤ 24.00
11ax-HE80	MCS0	103	6465	3.82	5.74	3.00	10.90	≤ 24.00
11ax-HE80	MCS0	119	6545	3.42	5.28	3.00	10.46	≤ 24.00
11ax-HE80	MCS0	135	6625	3.36	5.31	4.00	11.45	≤ 24.00
11ax-HE80	MCS0	151	6705	2.82	4.75	4.00	10.90	≤ 24.00
11ax-HE80	MCS0	183	6865	3.00	4.65	4.00	10.91	≤ 24.00
11ax-HE80	MCS0	199	6945	2.59	4.47	3.90	10.54	≤ 24.00
11ax-HE80	MCS0	215	7025	2.62	4.74	3.90	10.72	≤ 24.00
11ax-HE160	MCS0	15	6025	6.14	7.76	3.00	13.04	≤ 24.00
11ax-HE160	MCS0	47	6185	6.41	7.85	3.00	13.20	≤ 24.00
11ax-HE160	MCS0	79	6345	6.46	8.28	3.00	13.47	≤ 24.00
11ax-HE160	MCS0	111	6505	8.02	8.46	3.00	14.26	≤ 24.00
11ax-HE160	MCS0	143	6665	6.96	7.21	4.00	14.10	≤ 24.00
11ax-HE160	MCS0	175	6825	6.83	7.29	4.00	14.08	≤ 24.00
11ax-HE160	MCS0	207	6985	6.59	7.23	3.90	13.83	≤ 24.00

Client Standard Power

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Average Power (dBm)		Gain (dBi)	Total EIRP Power (dBm)	EIRP Limit (dBm)
	Ant 0			Ant 1				
CDD mode								
11a	MCS0	2	5935	6.24	7.69	3.00	13.04	≤ 30.00
11a	MCS0	1	5955	9.90	10.07	3.00	16.00	≤ 30.00
11a	MCS0	49	6195	10.00	9.99	3.00	16.01	≤ 30.00
11a	MCS0	93	6415	9.63	9.82	3.00	15.74	≤ 30.00
11a	MCS0	117	6535	10.08	9.72	4.00	16.91	≤ 30.00
11a	MCS0	153	6715	9.98	9.66	4.00	16.83	≤ 30.00
11a	MCS0	181	6855	10.07	9.58	4.00	16.84	≤ 30.00
11ax-HE20	MCS0	2	5935	-9.57	-8.02	3.00	-2.72	≤ 30.00
11ax-HE20	MCS0	1	5955	9.76	9.82	3.00	15.80	≤ 30.00
11ax-HE20	MCS0	49	6195	9.89	9.98	3.00	15.95	≤ 30.00
11ax-HE20	MCS0	93	6415	9.78	9.51	3.00	15.66	≤ 30.00
11ax-HE20	MCS0	117	6535	9.94	9.63	4.00	16.80	≤ 30.00
11ax-HE20	MCS0	153	6715	10.44	10.07	4.00	17.27	≤ 30.00
11ax-HE20	MCS0	181	6855	9.93	9.53	4.00	16.74	≤ 30.00
11ax-HE40	MCS0	3	5965	9.80	9.82	3.00	15.82	≤ 30.00
11ax-HE40	MCS0	51	6205	9.79	9.72	3.00	15.77	≤ 30.00
11ax-HE40	MCS0	91	6405	9.95	10.01	3.00	15.99	≤ 30.00
11ax-HE40	MCS0	123	6565	9.67	9.86	4.00	16.78	≤ 30.00
11ax-HE40	MCS0	147	6685	10.31	10.01	4.00	17.17	≤ 30.00
11ax-HE40	MCS0	179	6845	9.71	9.61	4.00	16.67	≤ 30.00
11ax-HE80	MCS0	7	5985	9.69	9.94	3.00	15.83	≤ 30.00
11ax-HE80	MCS0	55	6225	9.60	9.88	3.00	15.75	≤ 30.00
11ax-HE80	MCS0	87	6385	9.43	9.83	3.00	15.64	≤ 30.00
11ax-HE80	MCS0	135	6625	10.06	9.64	4.00	16.87	≤ 30.00
11ax-HE80	MCS0	151	6705	9.88	9.73	4.00	16.82	≤ 30.00
11ax-HE80	MCS0	167	6785	9.96	9.60	4.00	16.79	≤ 30.00
11ax-HE160	MCS0	15	6025	8.98	9.53	3.00	15.27	≤ 30.00
11ax-HE160	MCS0	47	6185	9.65	9.91	3.00	15.79	≤ 30.00
11ax-HE160	MCS0	79	6345	9.79	10.16	3.00	15.99	≤ 30.00
11ax-HE160	MCS0	143	6665	9.66	9.79	4.00	16.74	≤ 30.00

6.4. Power Spectral Density

6.4.1. Test Limit

For an indoor access point operating in the 5.925-7.125 GHz band, the maximum power spectral density must not exceed 5 dBm e.i.r.p. in any 1-megahertz band.

For a subordinate device operating under the control of an indoor access point in the 5.925-7.125 GHz band, the maximum power spectral density must not exceed 5 dBm e.i.r.p in any 1-megahertz band.


6.4.2. Test Procedure Used

KDB 789033 D02v02r01-SectionF

6.4.3. Test Setting

1. Analyzer was set to the center frequency of the UNII channel under investigation
2. Span was set to encompass the entire 26dB EBW of the signal.
3. RBW = 1MHz
4. VBW = 3MHz
5. Number of sweep points $\geq 2 \times (\text{span} / \text{RBW})$
6. Detector = power averaging (Average)
7. Sweep time = auto
8. Trigger = free run
9. Use the peak search function on the instrument to find the peak of the spectrum and record its value.
10. Add $10 \cdot \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission). For example, add $10 \cdot \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.

6.4.4. Test Setup

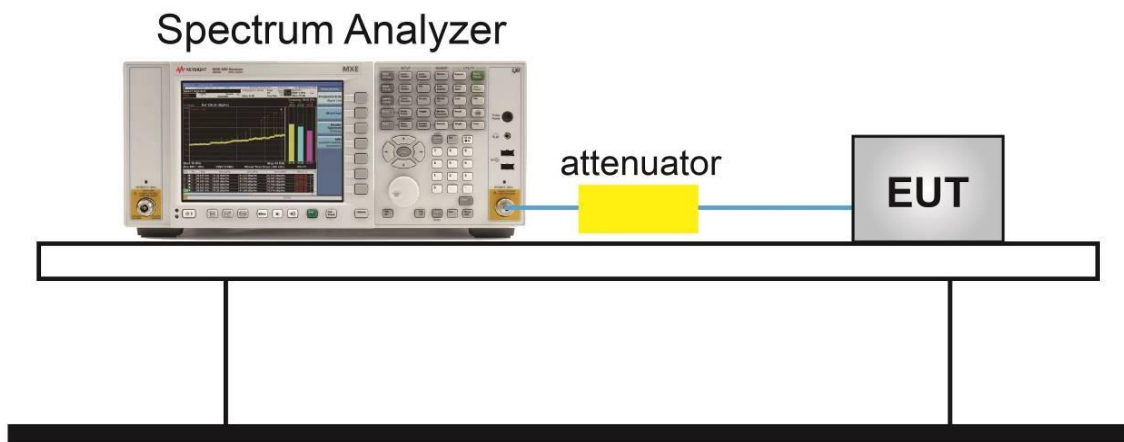

6.4.5. Test Result

Note: Reference original report Grant Date: 08/27/2024, FCC ID: HD5-CK67X0N.

6.5. In-Band Emission Measurement

6.5.1. Test Limit

Suppressed by 20 dB at 1 MHz outside of the channel edge. (The channel edge is defined as the 26-dB point on either side of the carrier center frequency.)

Suppressed by 28 dB at one channel bandwidth from the channel center.

Suppressed by 40 dB at one- and one-half times the channel bandwidth from the channel center.

6.5.2. Test Procedure used

KDB 987594 D02v02r01- Section J

6.5.3. Test Setting


Emissions Mask Reference Level Measurement

1. Set the span to encompass the entire 26 dB EBW of the signal.
2. Set RBW = same RBW used for 26 dB EBW measurement.
3. Set VBW $\geq 3 \times$ RBW.
4. Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$.
5. Sweep time = auto.
6. Detector = RMS.
7. Trace average at least 100 traces in power averaging (rms) mode.
8. Use the peak search function on the instrument to find the peak of the spectrum.

In-Band Emission

1. Using the measuring equipment limit line function, develop the emissions mask based on rule.
2. Adjust the span to encompass the entire mask as necessary.
3. Clear trace.
4. Trace average at least 100 traces in power averaging (rms) mode.
5. Adjust the reference level as necessary so that the crest of the channel touches the top of the emission mask.

6.5.4. Test Setup

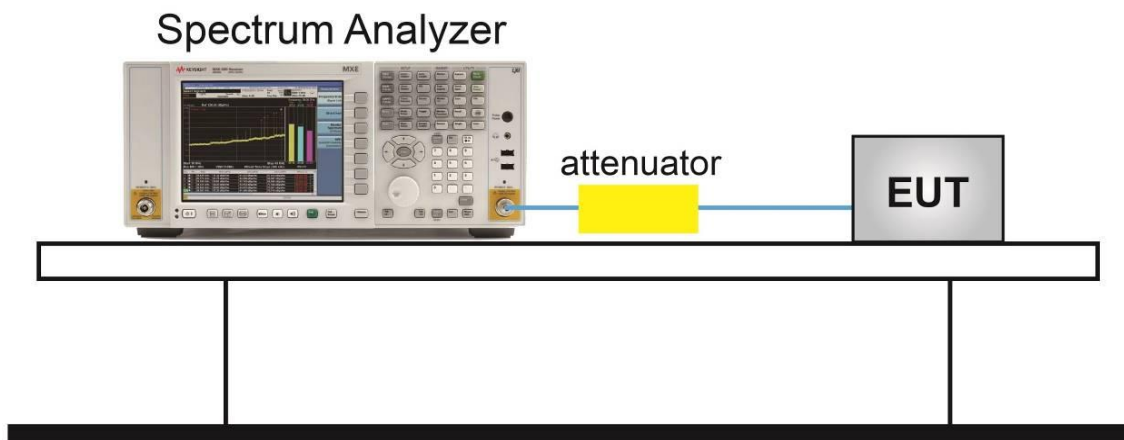

6.5.5. Test Result

Note: Reference original report Grant Date: 08/27/2024, FCC ID: HD5-CK67X0N.

6.6. Frequency Stability Measurement

6.6.1. Test Limit

Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

6.6.2. Test Procedure

Frequency Stability Under Temperature Variations:


The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to highest. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C decreased per stage until the lowest temperature reached.

Frequency Stability Under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.

6.6.3. Test Setup

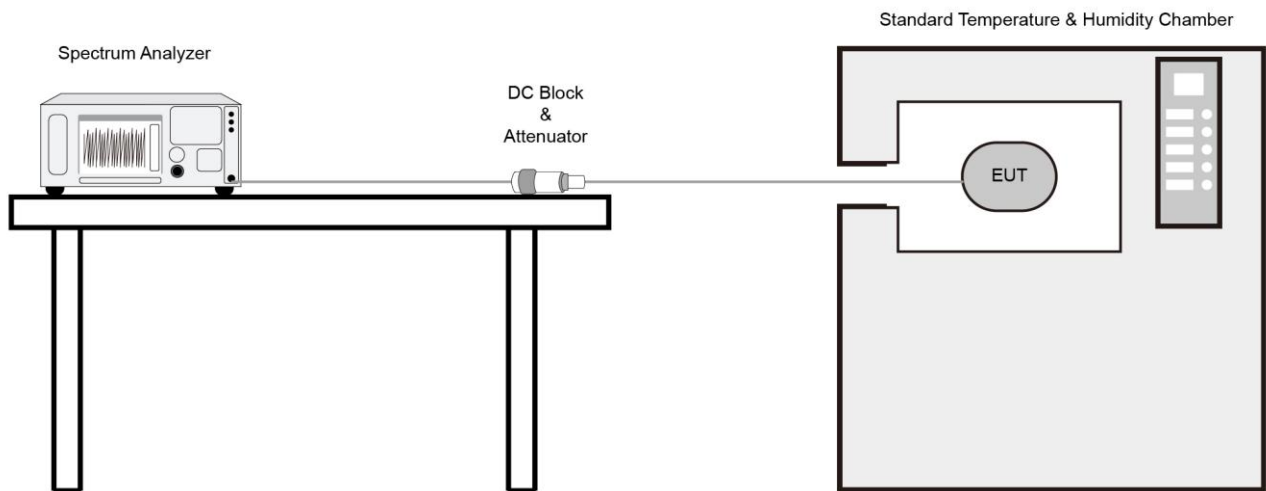

6.6.4. Test Result

Note: Reference original report Grant Date: 08/27/2024, FCC ID: HD5-CK67X0N.

6.7. Contention Based Protocol

6.7.1. Test Limit

Unlicensed indoor low power device must detect co-channel radio frequency power that is at least -62dBm (The threshold is referenced to a 0dBi antenna gain.) or low.

Indoor low power device must detect an AWGN signal with 90% (or better) level of certainty.

6.7.2. Test Procedure Used


KDB 987594 D02v02r01- Section I

6.7.3. Test Setting

1. Configure the EUT to transmit with a constant duty cycle.
2. Set the operating parameters of the EUT including power level, operating frequency, modulation and bandwidth.
3. Set the signal analyzer center frequency to the nominal EUT channel center frequency. The span range of the signal analyzer shall be between two times and five times the OBW of the EUT.
Connect the output port of the EUT to the signal analyzer 2. Ensure that the attenuator 2 provides enough attenuation to not overload the signal analyzer 2 receiver.
4. Monitoring the signal analyzer 2, verify the EUT is operating and transmitting with the parameters set at step two.
5. Using an AWGN signal source, generate a 10 MHz-wide AWGN signal. Use Table 1 of KDB 987594 to determine the center frequency of the 10 MHz AWGN signal relative to the EUT's channel bandwidth and center frequency.
6. Set the AWGN signal power to an extremely low level. Connect the AWGN signal source, via a 3-dB splitter, to the signal analyzer 1 and the EUT as shown in below figure.
7. Transmit the AWGN signal (RF ON) and verify its characteristics on the signal analyzer 1.
8. Monitor the signal analyzer 2 to verify if the AWGN signal has been detected and the EUT has ceased transmission. If the EUT continues to transmit, then incrementally increase the AWGN signal power level until the EUT stops transmitting.

9. Determine and record the AWGN signal power level (at the EUT's antenna port) at which the EUT ceased transmission. Repeat the procedure at least 10 times to verify the EUT can detect an AWGN signal with 90% (or better) level of certainty.
10. Refer to Table 1 to determine number of times the detection threshold testing needs to be repeated. If testing is required more than once, then go back to step 5, choose a different center frequency for the AWGN signal and repeat the process.

6.7.4. Test Setup

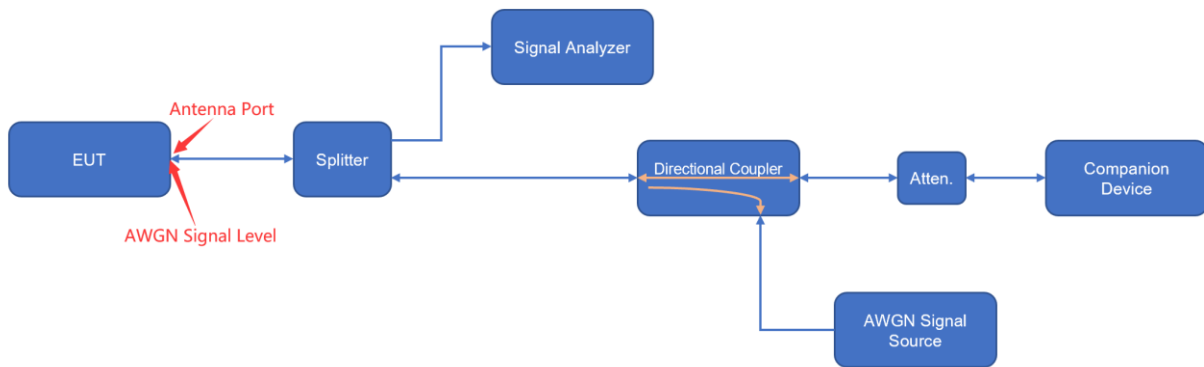

6.7.5. Test Result

Note: Reference original report Grant Date: 08/27/2024, FCC ID: HD5-CK67X0N.

6.8. Radiated Spurious Emission

6.8.1. Test Limit

For 15.407(b)(5) requirement

For transmitters operating within the 5.925-7.125 GHz band: Any emissions outside of the 5.925-7.125 GHz band must not exceed an e.i.r.p. of -27 dBm/MHz.

Refer to 987594 D02 U-NII 6GHz EMC Measurement v02r01 clause G

Use guidance in KDB 789033 for measurements below 1000 MHz and above 1000 MHz. Unwanted emissions outside of restricted bands are measured with a RMS detector. In addition, 15.35(b) applies where the peak emissions must be limited to no more than 20 dB above the average limit.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

6.8.2. Test Procedure Used

KDB 789033 D02v02r01- Section G

6.8.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000MHz	1MHz

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.
If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

6.8.4. Test Setup

Below 1GHz Test Setup:

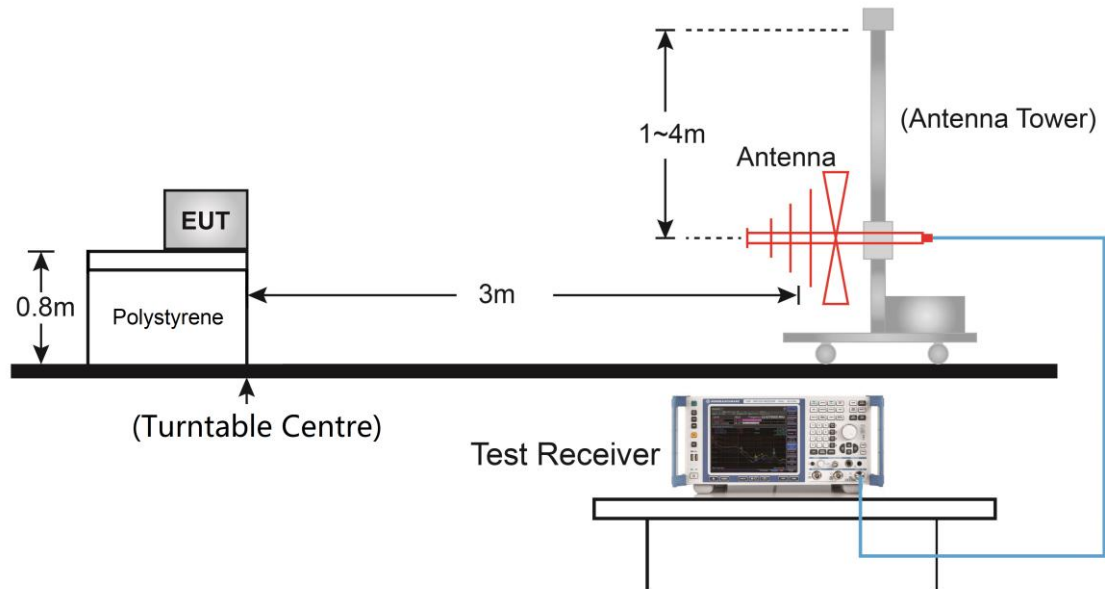


Above 1GHz Test Setup:

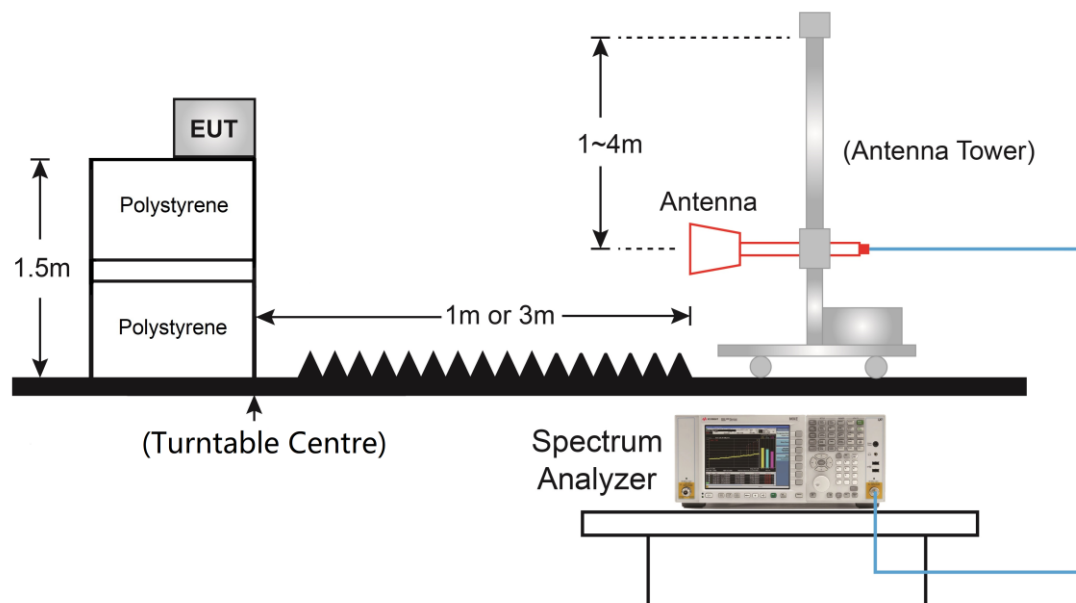

6.8.5. Test Result

EUT	Mobile Computer	Date of Test	2024-12-24
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11a_TX_Band5_CH 1_ANT 0+1_Client Standard Power	Test Voltage	By Notebook PC

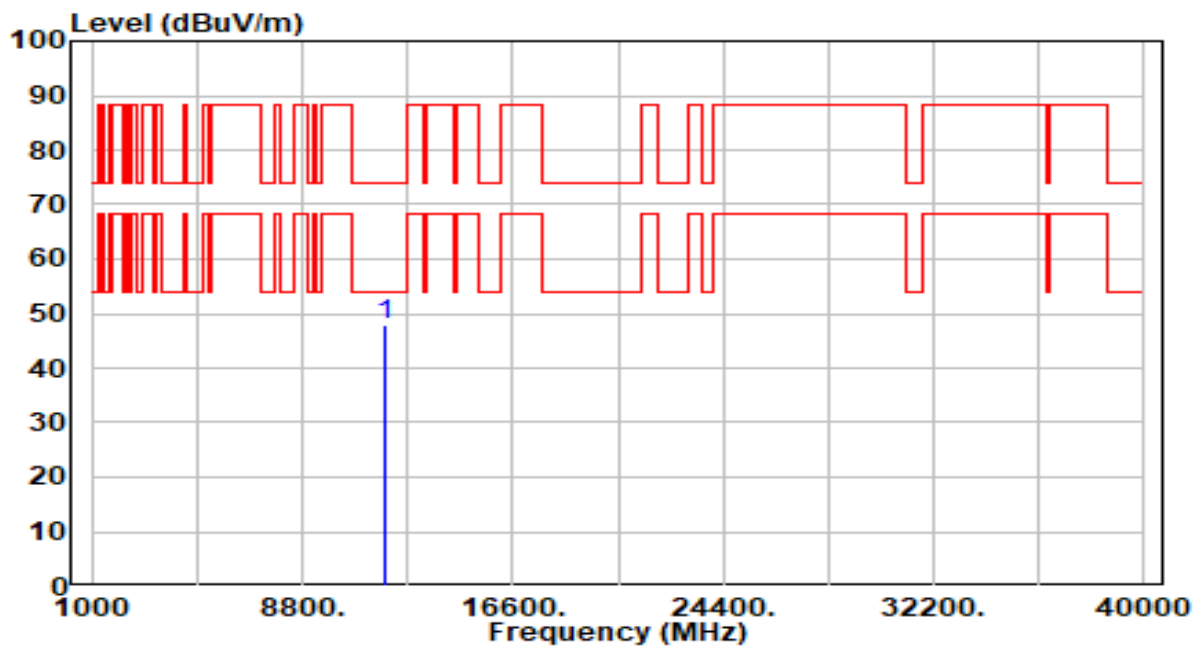


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 11910.000	42.32	5.57	47.89	-26.11	74.00	100	211	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-12-24
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11a_TX_Band5_CH 1_ANT 0+1_Client Standard Power	Test Voltage	By Notebook PC

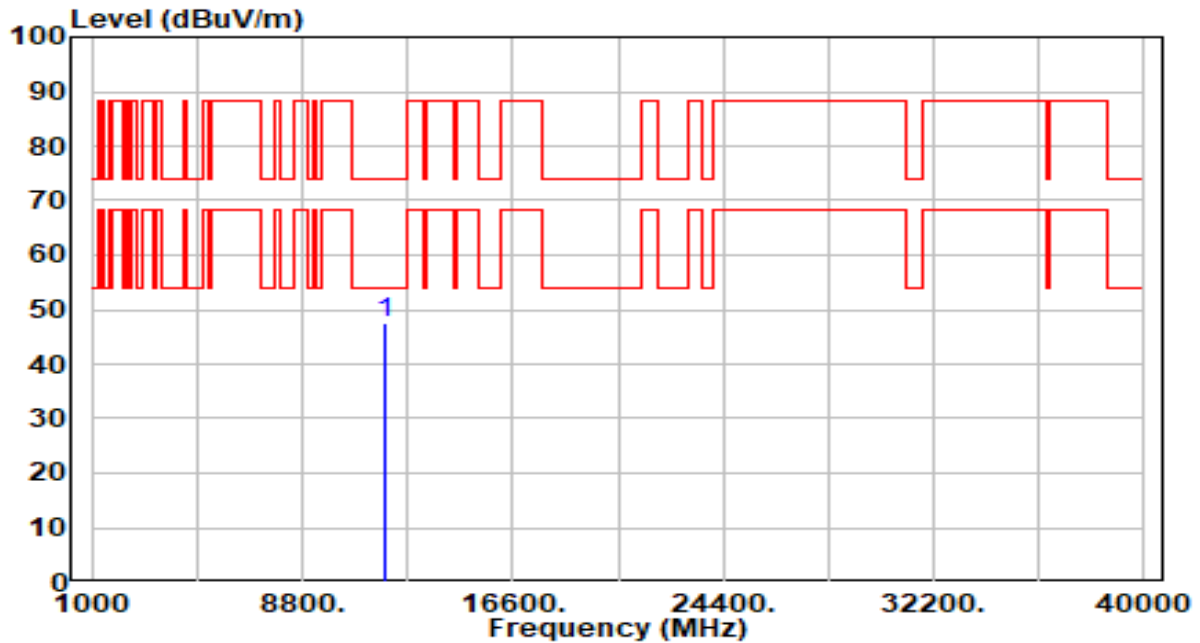


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11910.000	41.79	5.57	47.36	-26.64	74.00	275	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-12-24
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11a_TX_Band7_CH 153_ANT 0+1_Client Standard Power	Test Voltage	By Notebook PC

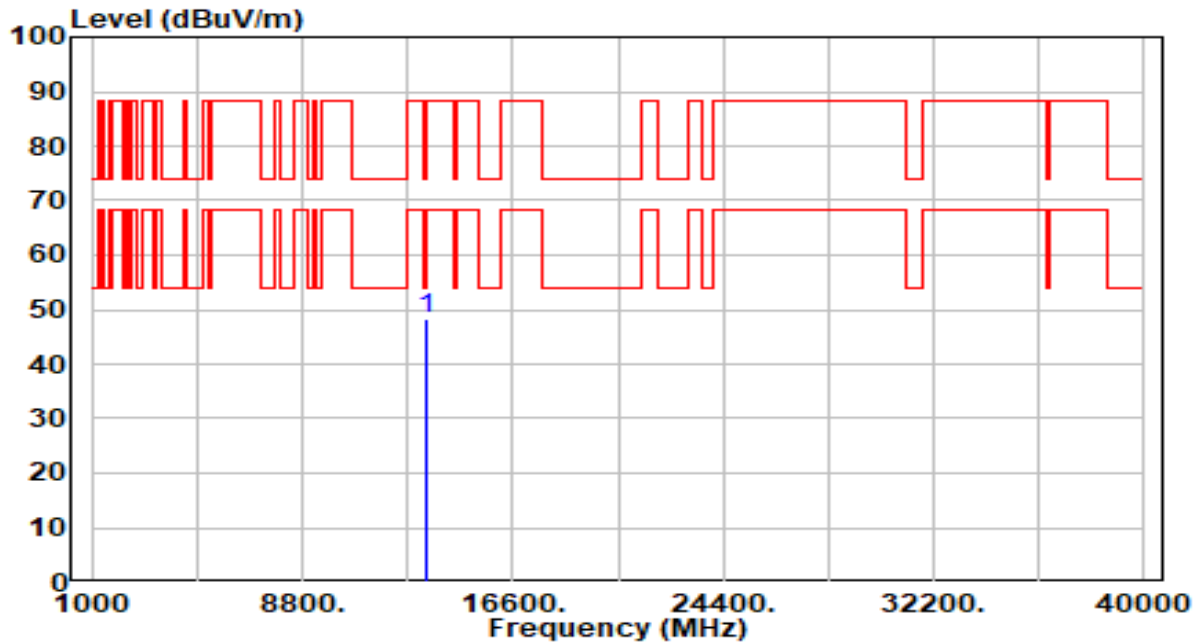


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 13430.000	41.35	6.95	48.30	-39.90	88.20	100	200	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-12-24
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11a_TX_Band7_CH 153_ANT 0+1_Client Standard Power	Test Voltage	By Notebook PC

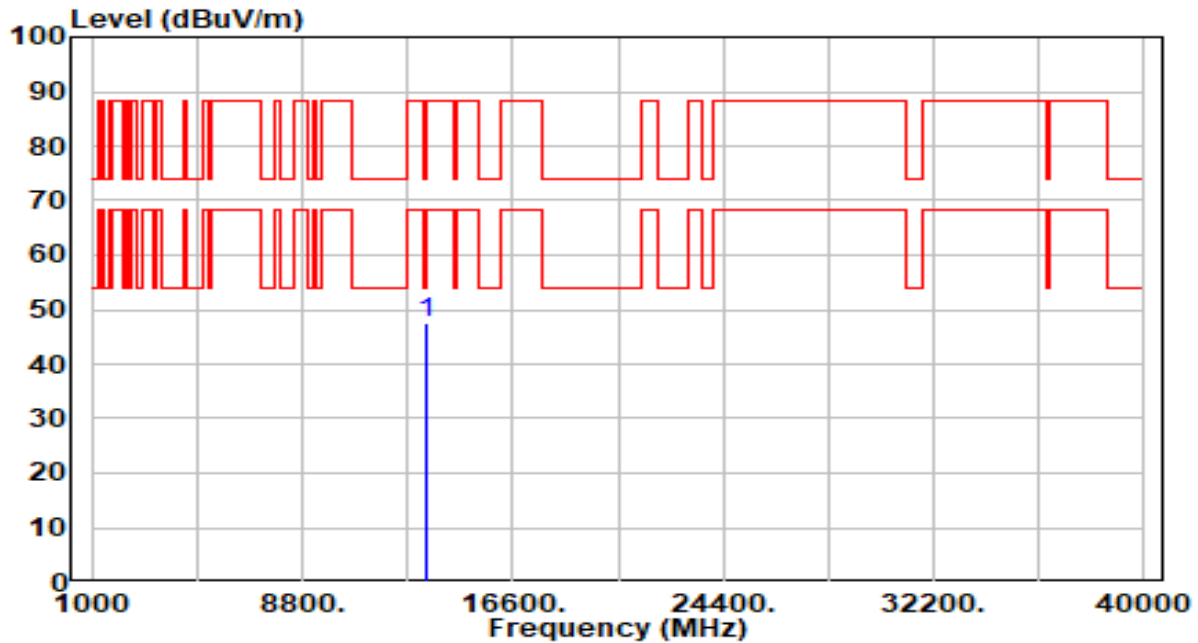


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	13430.000	40.72	6.95	47.67	-40.53	88.20	100	247	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-12-24
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band5_CH 1_ANT 0+1_Client Standard Power	Test Voltage	By Notebook PC

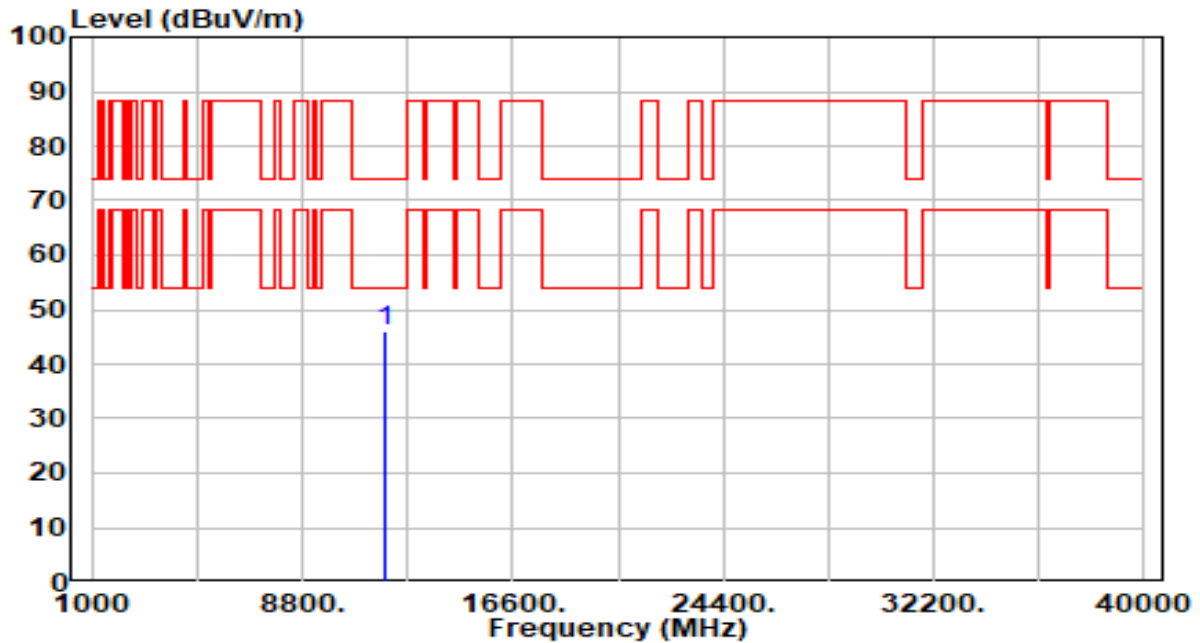


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11910.000	40.58	5.57	46.14	-27.86	74.00	100	345	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-12-24
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band5_CH 1_ANT 0+1_Client Standard Power	Test Voltage	By Notebook PC

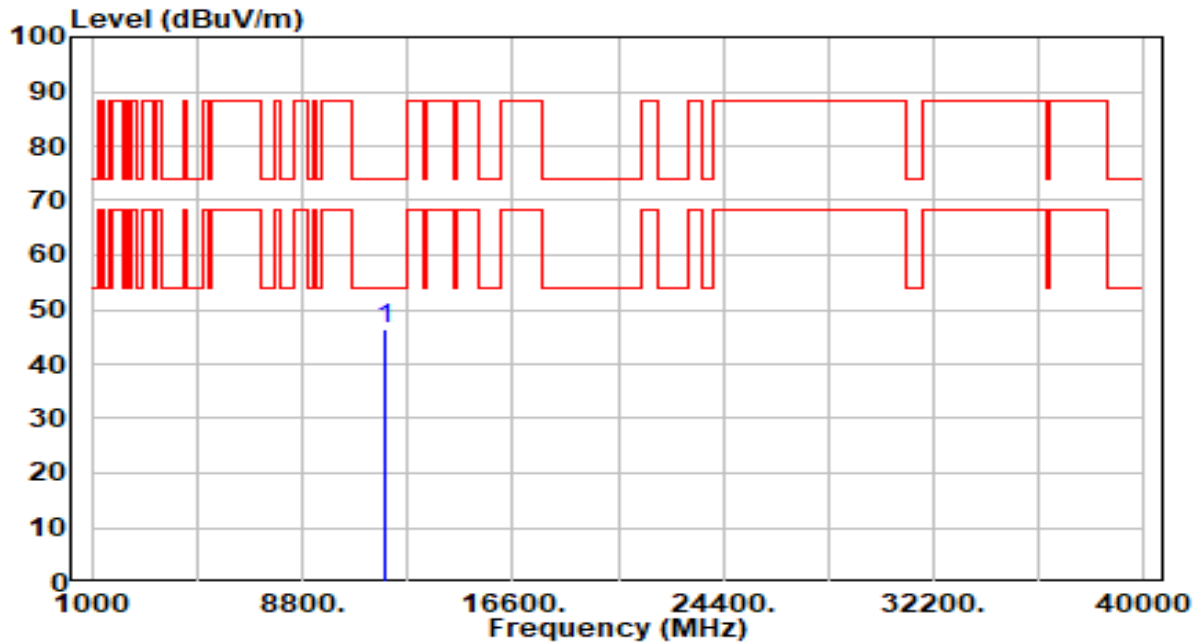


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 11910.000	40.91	5.57	46.48	-27.52	74.00	100	36	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-12-24
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band7_CH 153_ANT 0+1_Client Standard Power	Test Voltage	By Notebook PC

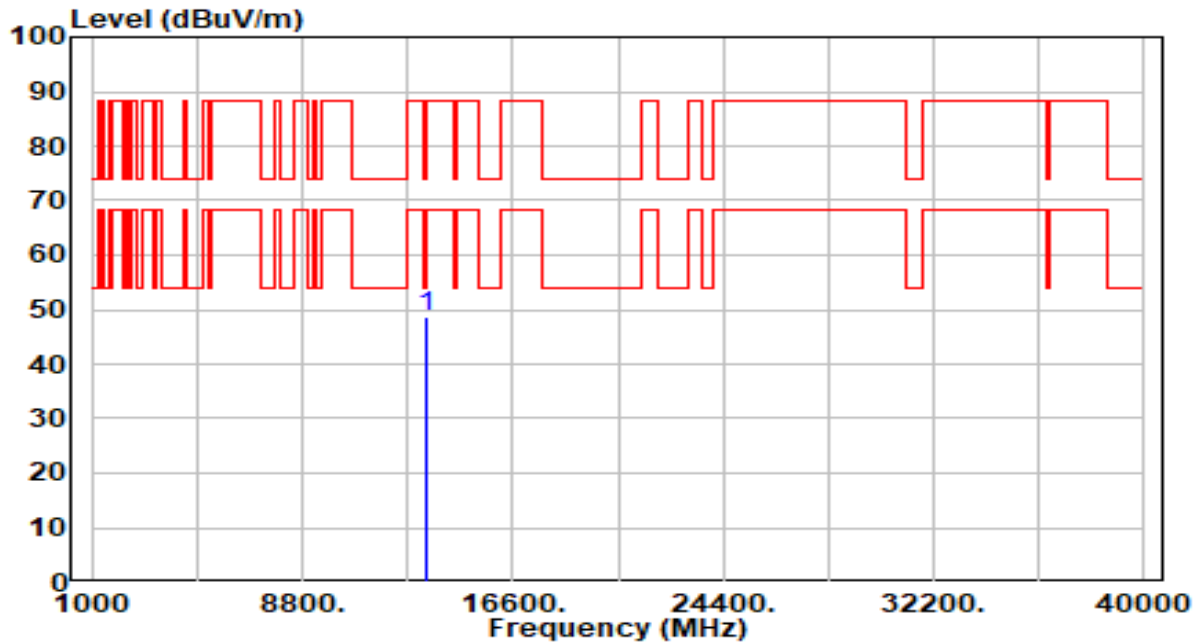


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 13430.000	41.55	6.95	48.50	-39.70	88.20	100	77	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-12-24
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band7_CH 153_ANT 0+1_Client Standard Power	Test Voltage	By Notebook PC

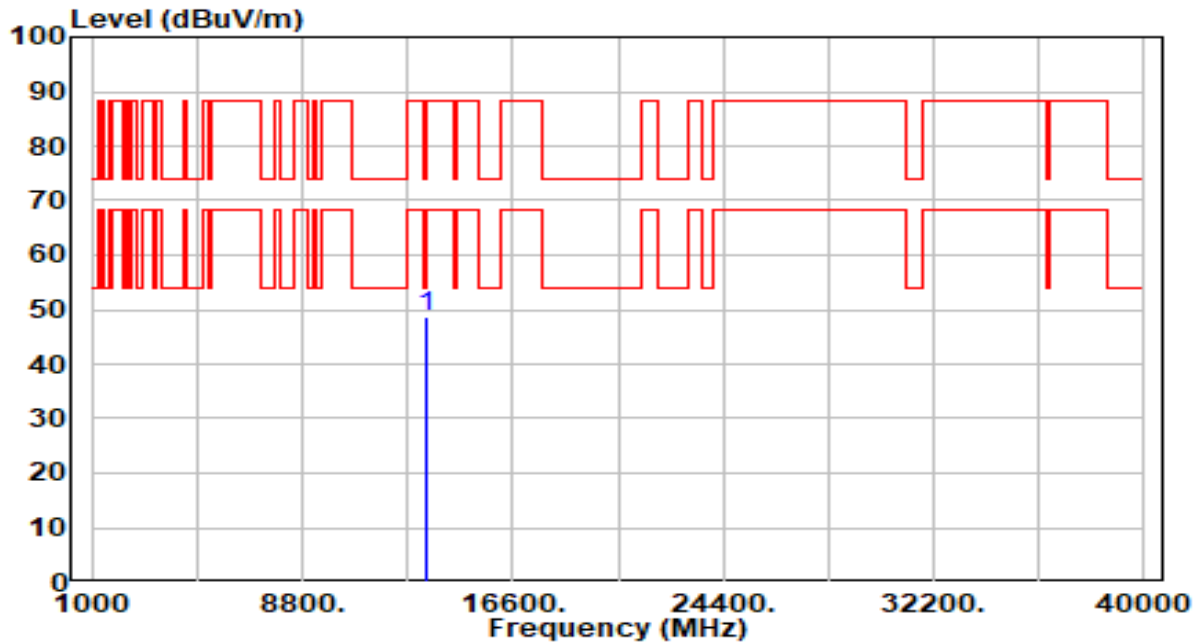

No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 13430.000	41.59	6.95	48.54	-39.66	88.20	100	78	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

6.9. Radiated Restricted Band Edge

6.9.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

For 15.407(b)(5) requirement

For transmitters operating within the 5.925-7.125 GHz band: Any emissions outside of the 5.925-7.125 GHz band must not exceed an e.i.r.p. of -27 dBm/MHz.

Refer to 987594 D02 U-NII 6GHz EMC Measurement v02r01 clause G - Unwanted Emission Measurement

Use guidance in KDB 789033 for measurements below 1000 MHz and above 1000 MHz. Unwanted emissions outside of restricted bands are measured with a RMS detector. In addition, 15.35(b) applies where the peak emissions must be limited to no more than 20 dB above the average limit.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

6.9.2. Test Procedure Used

KDB 789033 D02v02r01- Section G

6.9.3. Test Setting

Peak Measurements above 1GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = Peak
5. Sweep time = Auto couple
6. Trace mode = Max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; if the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10Hz
4. If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration
5. Detector = Peak


6. Sweep time = Auto
7. Trace mode = Max hold
8. Trace was allowed to stabilize

6.9.4. Test Setup

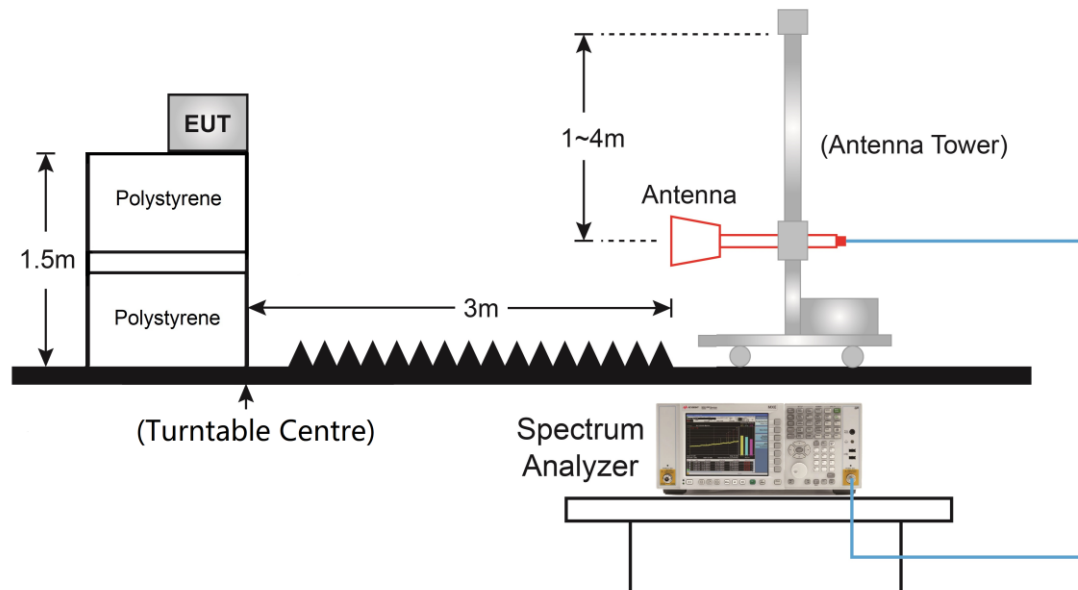

6.9.5. Test Result

EUT	Mobile Computer	Date of Test	2024-12-24
Factor	DRH18-E	Temp. / Humidity	21°C / 61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band5_CH 2_ANT 0+1_Client Low Power Indoor	Test Voltage	By Notebook PC

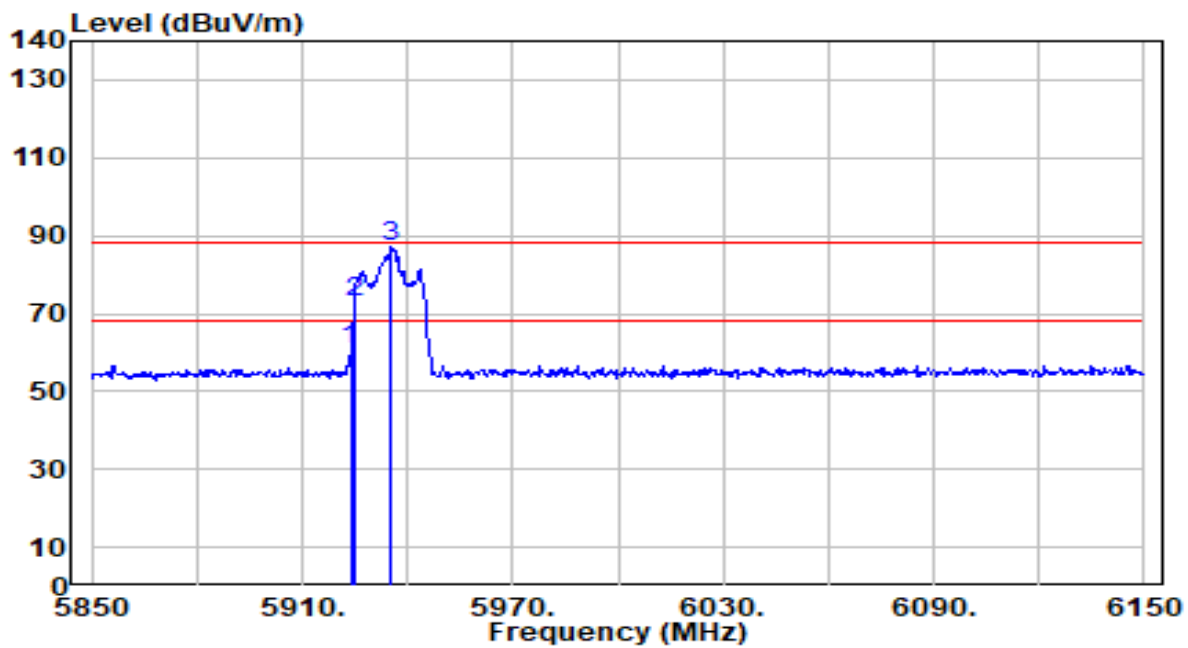


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5923.800	58.43	2.27	60.69	-27.51	88.20	100	226	Peak
2	* 5925.000	70.46	2.27	72.73	-15.47	88.20	100	226	Peak
3	5935.500	84.69	2.27	86.96	N/A	N/A	100	226	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-12-24
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band5_CH 2_ANT 0+1_Client Low Power Indoor	Test Voltage	By Notebook PC

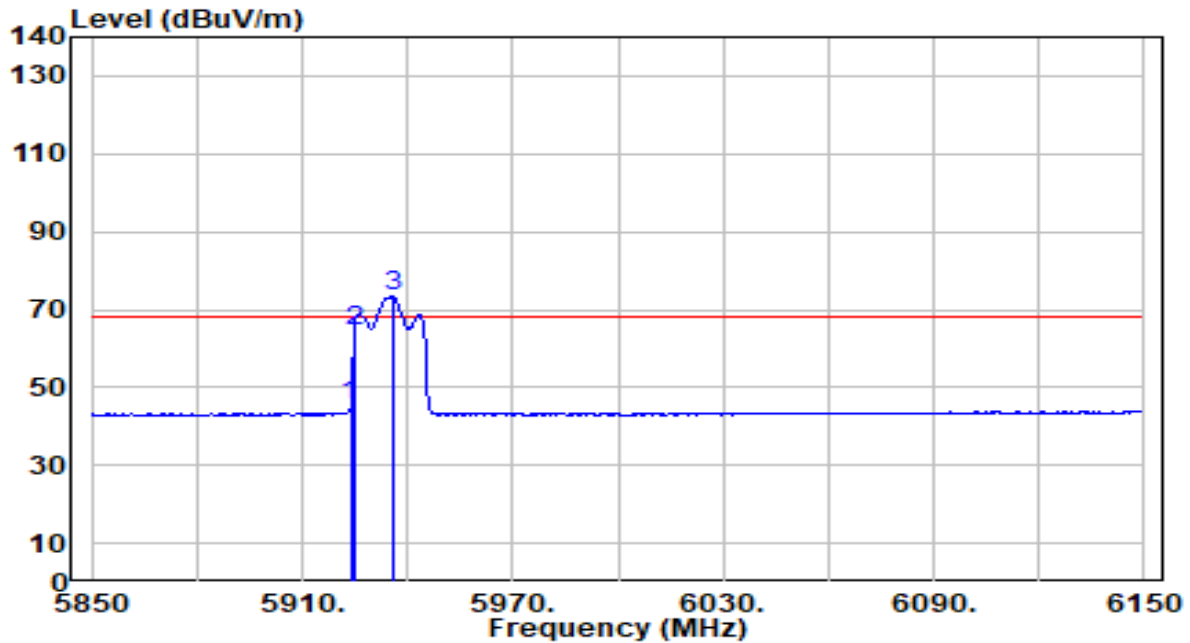


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5923.800	43.15	2.27	45.41	-22.79	68.20	100	226	Average
2	* 5925.000	61.98	2.27	64.25	-3.95	68.20	100	226	Average
3	5935.800	70.97	2.27	73.24	N/A	N/A	100	226	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-12-24
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band5_CH 2_ANT 0+1_Client Low Power Indoor	Test Voltage	By Notebook PC

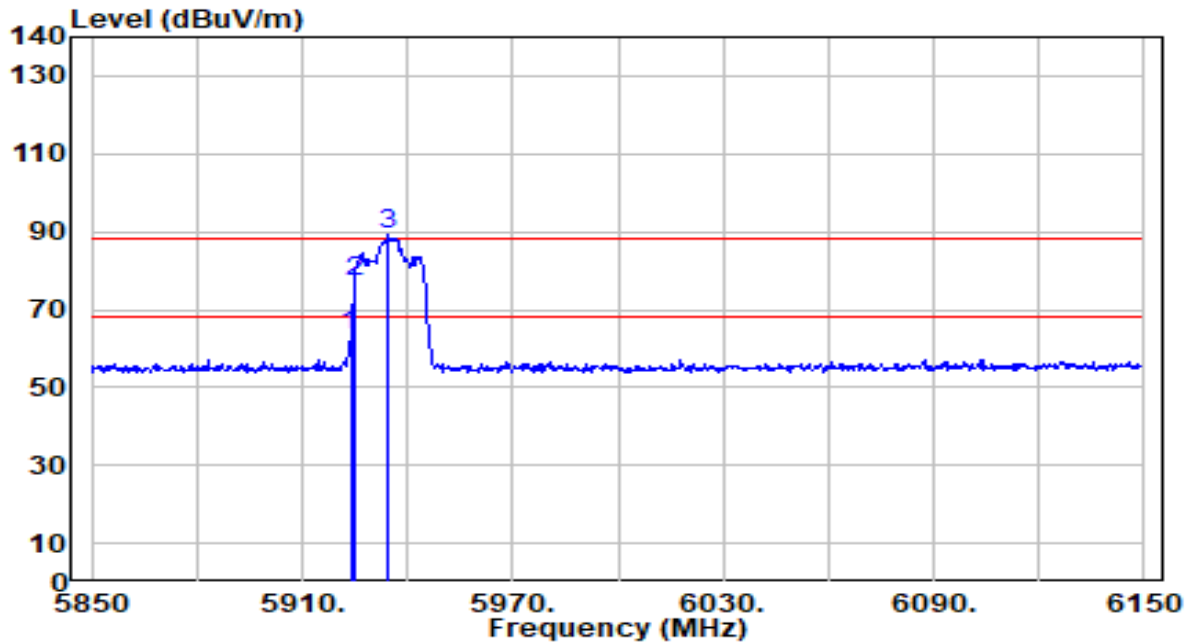


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5923.800	61.11	2.27	63.38	-24.82	88.20	100	261	Peak
2	* 5925.000	74.77	2.27	77.04	-11.16	88.20	100	261	Peak
3	5934.600	86.97	2.27	89.24	N/A	N/A	100	261	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-12-24
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band5_CH 2_ANT 0+1_Client Low Power Indoor	Test Voltage	By Notebook PC

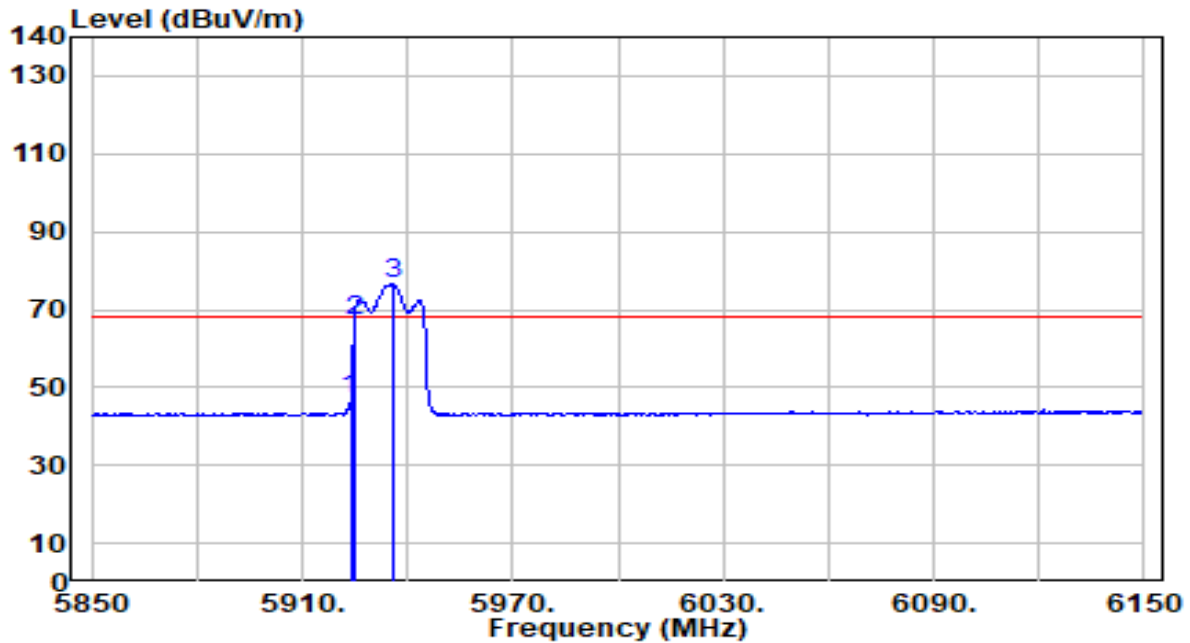


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5923.800	45.00	2.27	47.27	-20.93	68.20	100	261	Average
2	* 5925.000	64.98	2.27	67.24	-0.96	68.20	100	261	Average
3	5935.800	74.26	2.27	76.53	N/A	N/A	100	261	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-12-24
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band8_CH 233_ANT 0+1_Client Low Power Indoor	Test Voltage	By Notebook PC

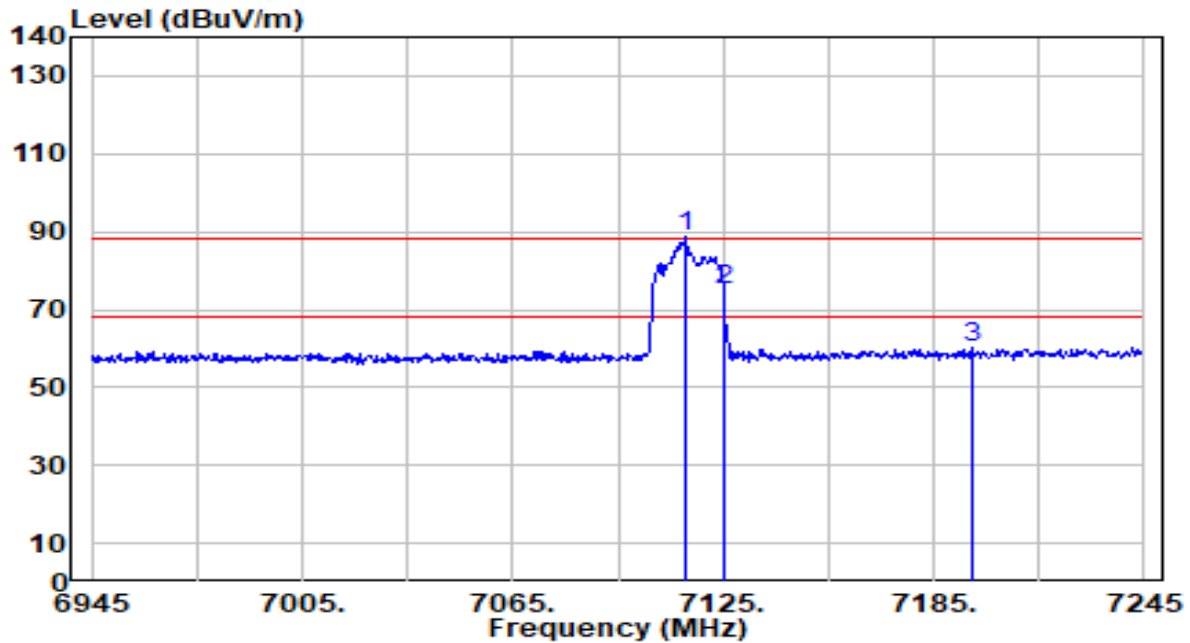


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7114.200	82.83	5.71	88.54	N/A	N/A	100	244	Peak
2	* 7125.000	69.51	5.73	75.24	-12.96	88.20	100	244	Peak
3	7195.800	54.42	5.80	60.23	-27.97	88.20	100	244	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-12-24
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band8_CH 233_ANT 0+1_Client Low Power Indoor	Test Voltage	By Notebook PC

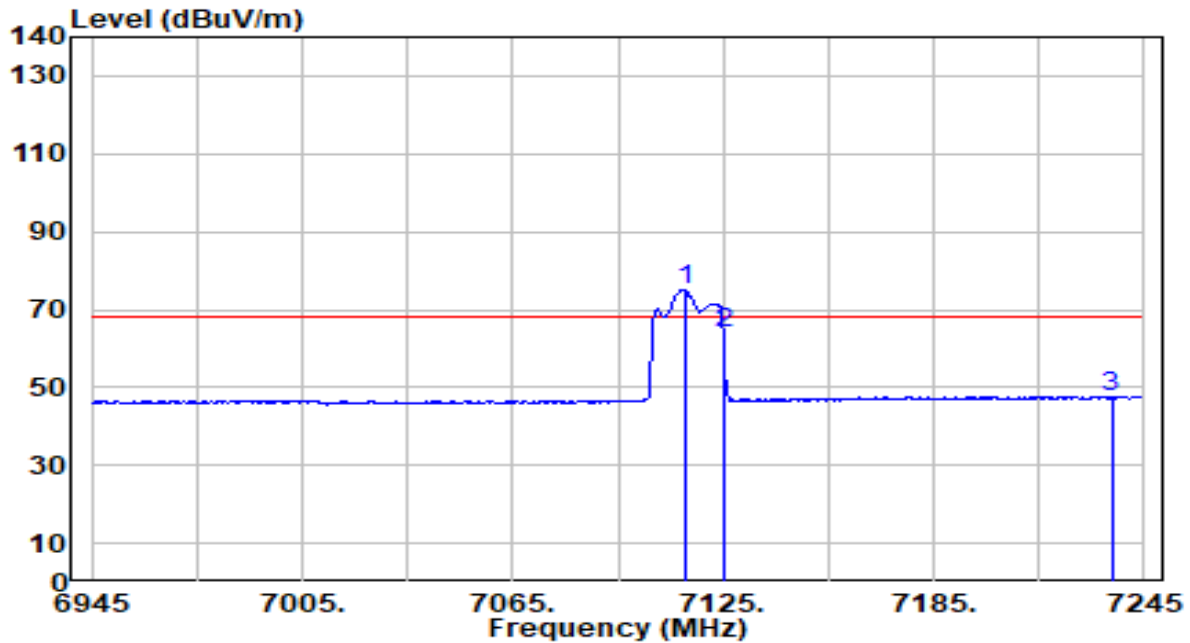


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7113.900	69.56	5.71	75.27	N/A	N/A	100	244	Average
2	* 7125.000	58.32	5.73	64.05	-4.15	68.20	100	244	Average
3	7235.700	41.90	5.81	47.71	-20.49	68.20	100	244	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-12-24
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band8_CH 233_ANT 0+1_Client Low Power Indoor	Test Voltage	By Notebook PC

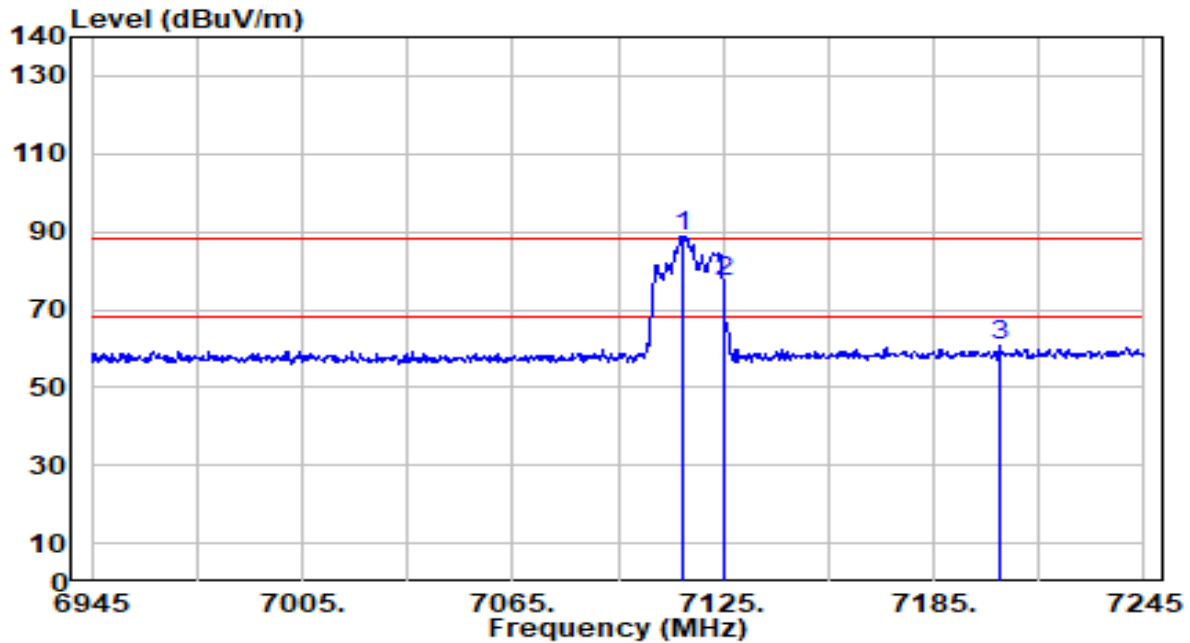


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7113.300	83.27	5.71	88.98	N/A	N/A	100	192	Peak
2	* 7125.000	71.39	5.73	77.12	-11.08	88.20	100	192	Peak
3	7203.600	55.01	5.81	60.82	-27.38	88.20	100	192	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-12-24
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band8_CH 233_ANT 0+1_Client Low Power Indoor	Test Voltage	By Notebook PC

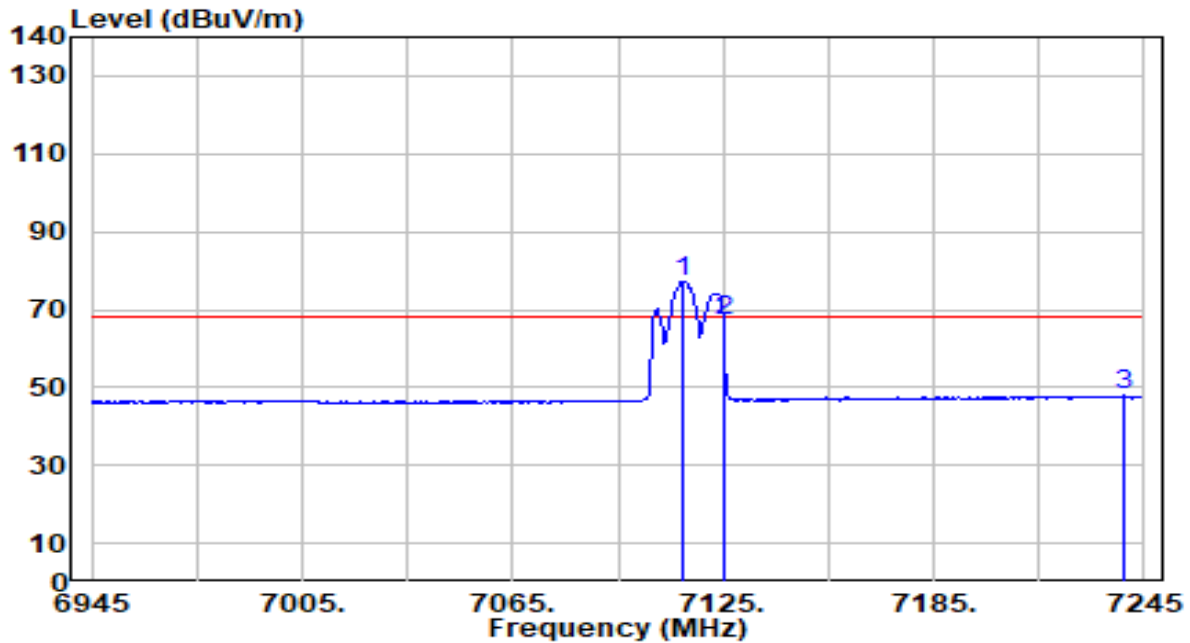


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7113.600	71.62	5.71	77.33	N/A	N/A	100	192	Average
2	* 7125.000	61.26	5.73	66.99	-1.21	68.20	100	192	Average
3	7239.600	42.02	5.81	47.83	-20.37	68.20	100	192	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-12-24
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11a_TX_Band5_CH 2_ANT 0+1_Client Standard Power	Test Voltage	By Notebook PC

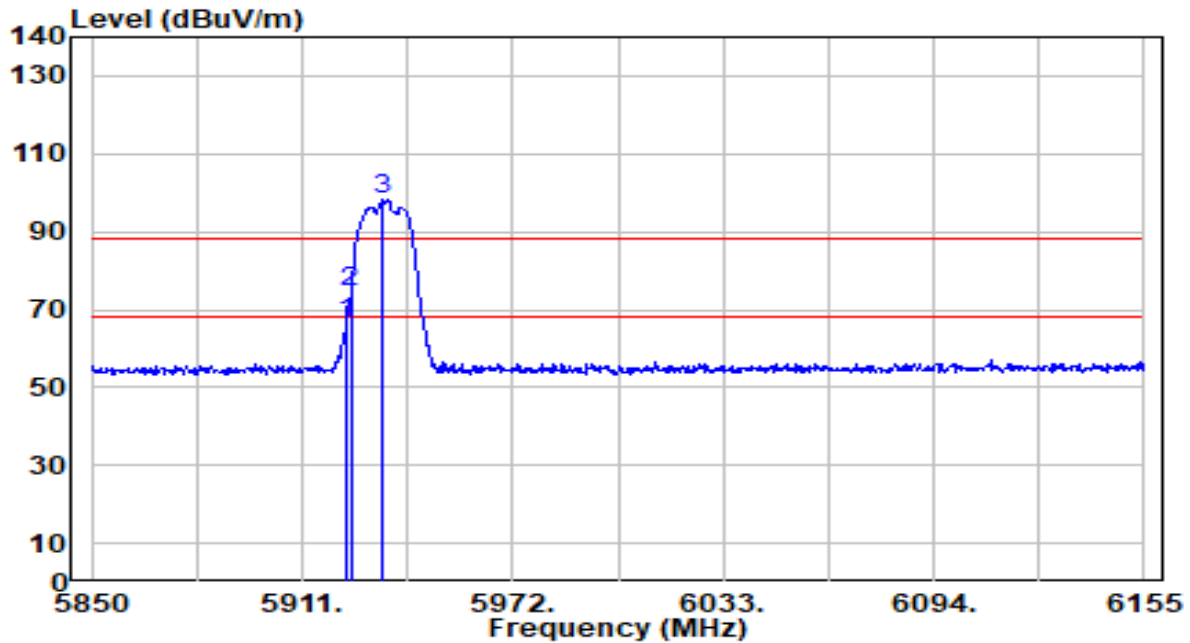


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5923.810	64.26	2.27	66.52	-21.68	88.20	100	226	Peak
2	* 5925.000	72.35	2.27	74.62	-13.58	88.20	100	226	Peak
3	5934.485	95.84	2.27	98.11	N/A	N/A	100	226	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-12-24
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11a_TX_Band5_CH 2_ANT 0+1_Client Standard Power	Test Voltage	By Notebook PC

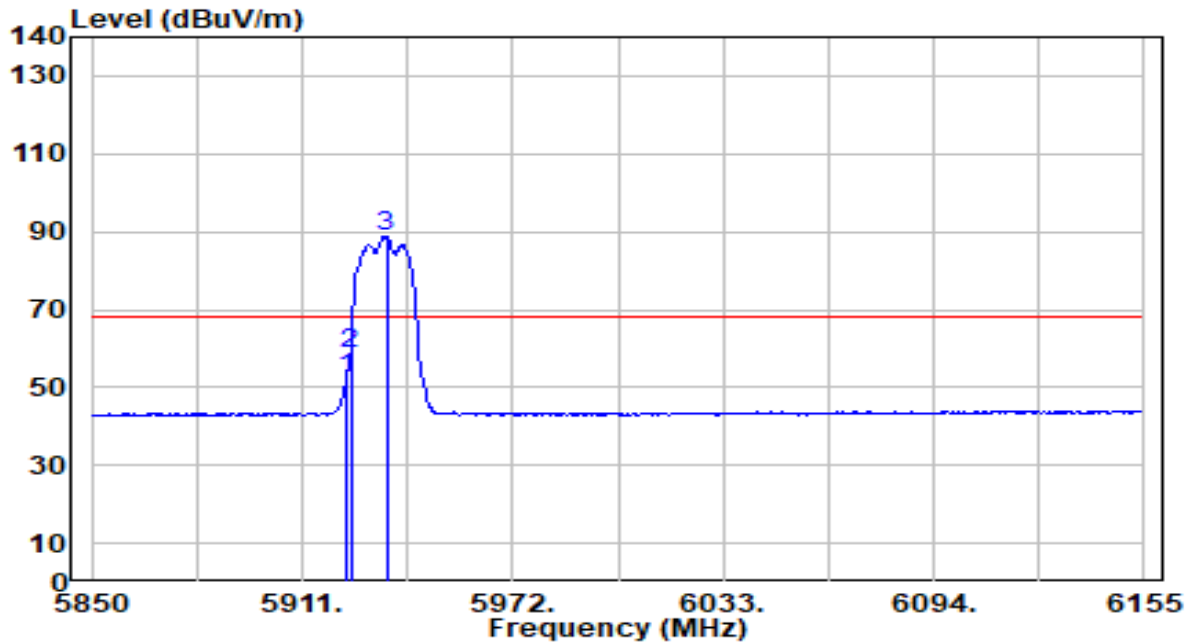


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5923.810	50.01	2.27	52.28	-15.92	68.20	100	226	Average
2	* 5925.000	56.20	2.27	58.46	-9.74	68.20	100	226	Average
3	5935.400	86.54	2.27	88.81	N/A	N/A	100	226	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-12-24
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11a_TX_Band5_CH 2_ANT 0+1_Client Standard Power	Test Voltage	By Notebook PC

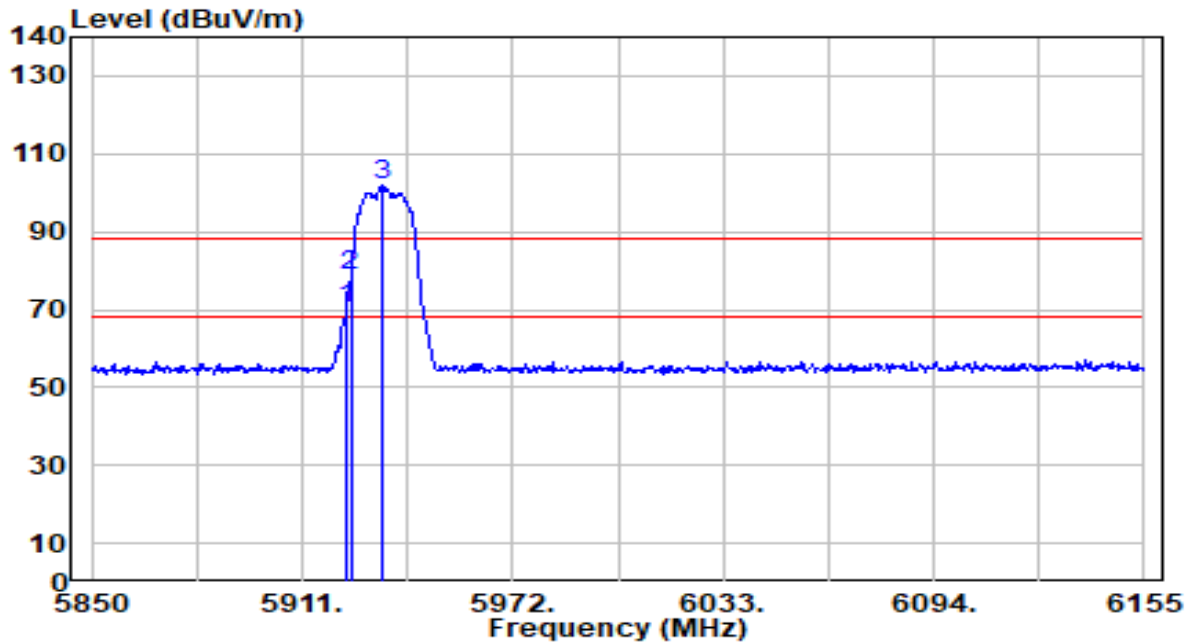


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5923.810	68.13	2.27	70.39	-17.81	88.20	117	257	Peak
2	* 5925.000	76.24	2.27	78.50	-9.70	88.20	117	257	Peak
3	5934.180	99.78	2.27	102.05	N/A	N/A	117	257	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-12-24
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11a_TX_Band5_CH 2_ANT 0+1_Client Standard Power	Test Voltage	By Notebook PC

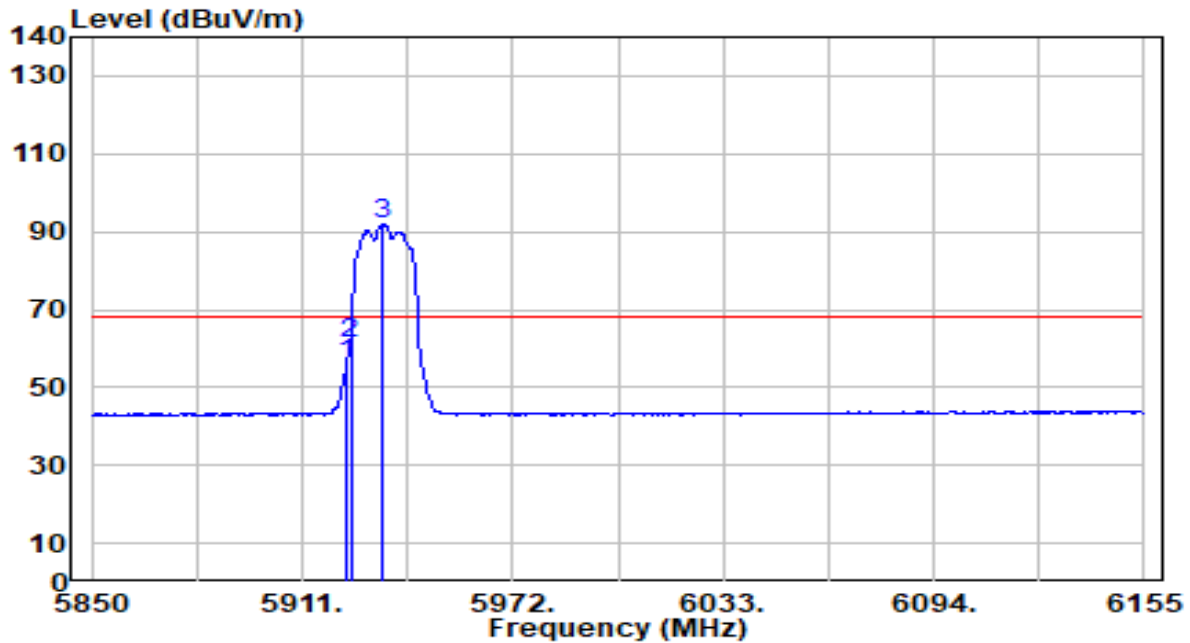


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5923.810	53.50	2.27	55.77	-12.43	68.20	117	257	Average
2	* 5925.000	59.18	2.27	61.44	-6.76	68.20	117	257	Average
3	5934.180	89.92	2.27	92.18	N/A	N/A	117	257	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-12-24
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band5_CH 2_ANT 0+1_Client Standard Power	Test Voltage	By Notebook PC

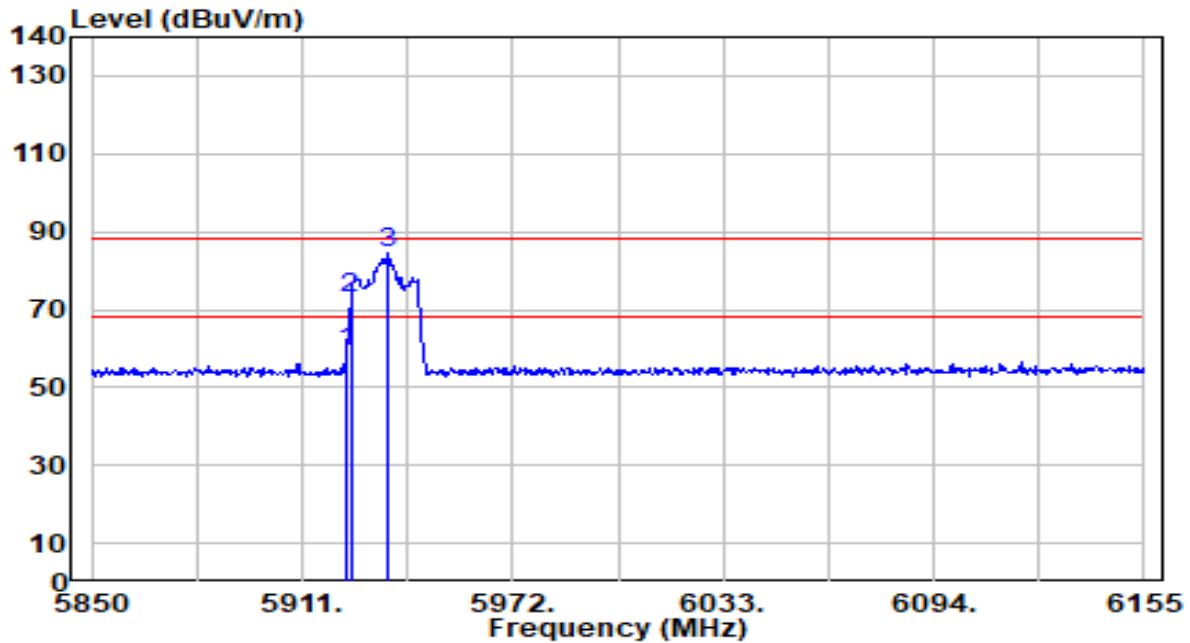


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5923.810	56.90	2.27	59.17	-29.03	88.20	100	226	Peak
2	* 5925.000	70.90	2.27	73.16	-15.04	88.20	100	226	Peak
3	5936.010	82.00	2.27	84.27	N/A	N/A	100	226	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-12-24
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band5_CH 2_ANT 0+1_Client Standard Power	Test Voltage	By Notebook PC

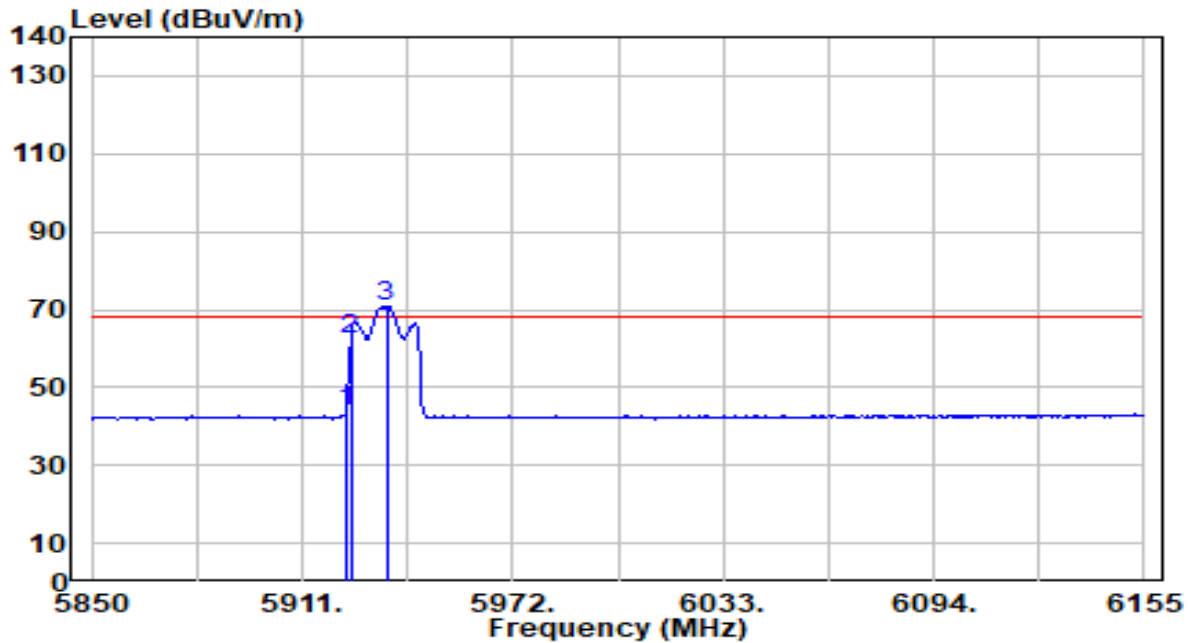


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5923.810	41.81	2.27	44.08	-24.12	68.20	100	226	Average
2	* 5925.000	60.05	2.27	62.32	-5.88	68.20	100	226	Average
3	5935.400	68.62	2.27	70.89	N/A	N/A	100	226	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-12-24
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band5_CH 2_ANT 0+1_Client Standard Power	Test Voltage	By Notebook PC

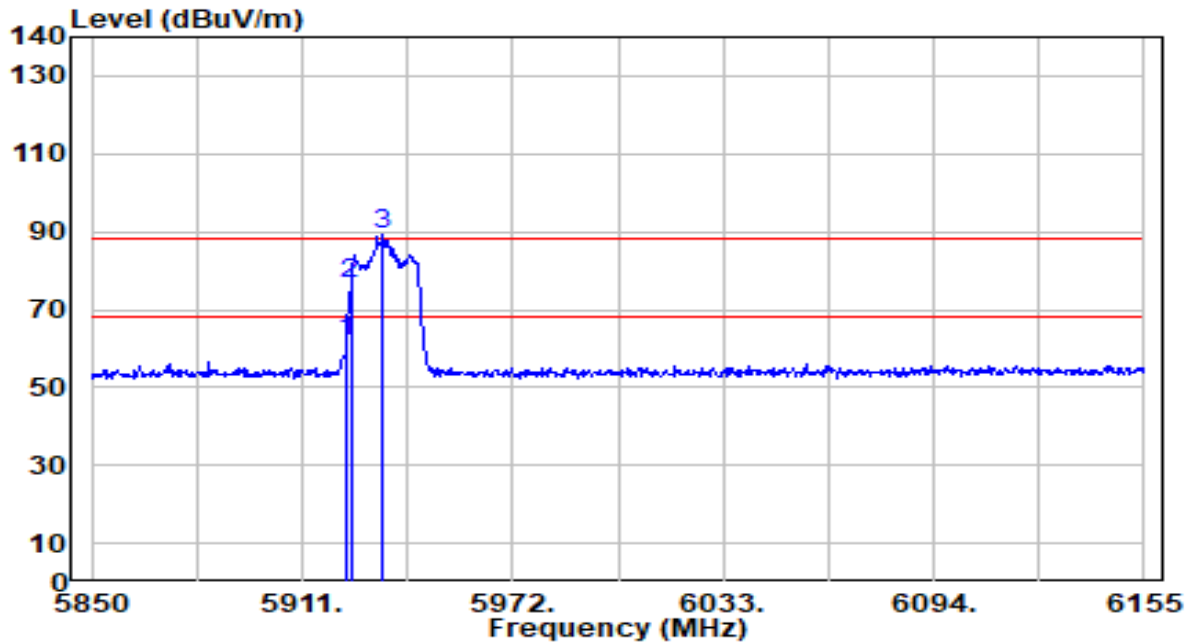


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5923.810	59.46	2.27	61.73	-26.47	88.20	117	258	Peak
2	* 5925.000	74.37	2.27	76.63	-11.57	88.20	117	258	Peak
3	5934.485	86.93	2.27	89.20	N/A	N/A	117	258	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2024-12-24
Factor	DRH18-E	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band5_CH 2_ANT 0+1_Client Standard Power	Test Voltage	By Notebook PC

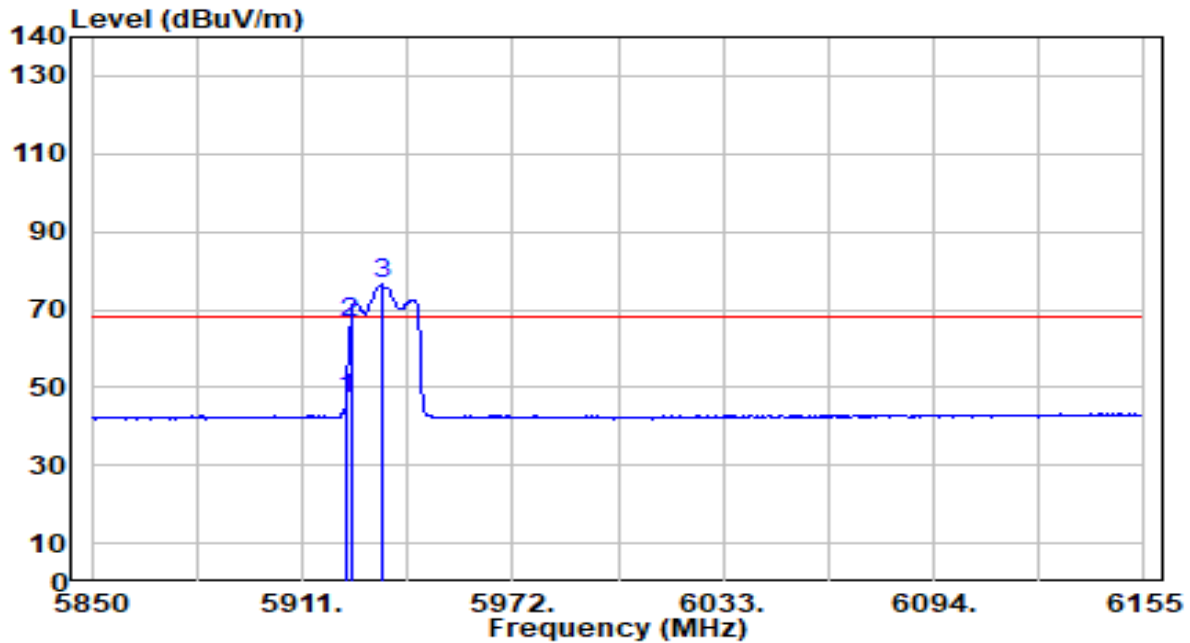

No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5923.810	44.83	2.27	47.10	-21.10	68.20	117	258	Average
2	* 5925.000	64.14	2.27	66.41	-1.79	68.20	117	258	Average
3	5934.180	74.21	2.27	76.47	N/A	N/A	117	258	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

6.10. AC Conducted Emissions


6.10.1. Test Limit

FCC Part 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

6.10.2. Test Setup

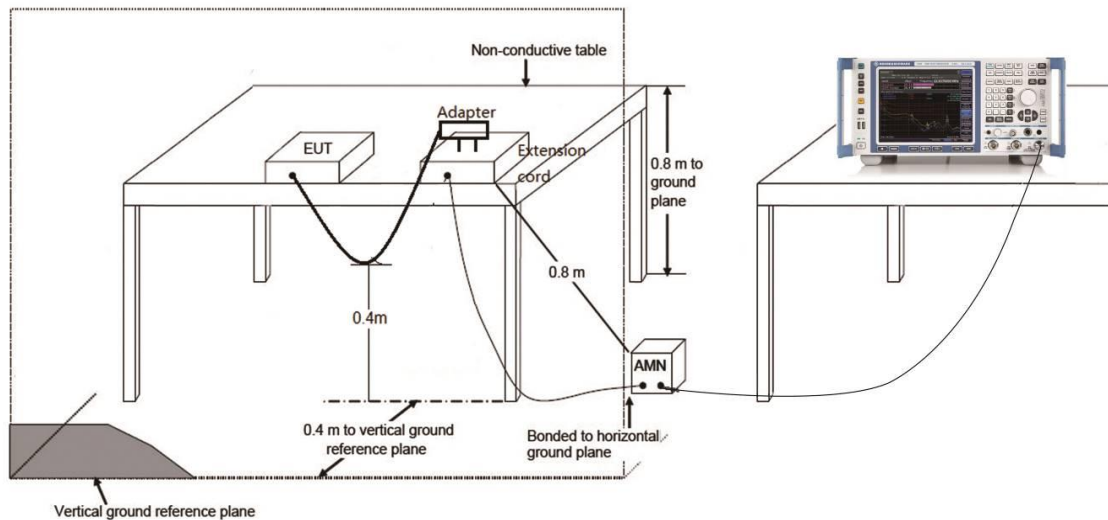

6.10.3. Test Result

Note: Reference original report Grant Date: 08/27/2024, FCC ID: HD5-CK67X0N.

6.11. Dual Client Test, Demonstration of Proper Power Adjustment based on Associated AP

6.11.1. Test Limit

Note:

1. The EUT is a Dual Client Device
2. The test was executed with the SP AP and LPI AP (CMW500) authorized to transmit up to 30dBm (SP AP) and 24dBm(LPI AP).
3. The EUT was connected via a conducted connection to the spectrum analyzer. Simultaneously, the EUT was able to see and establish a conducted connection with the standard power access point and Low Power Indoor access point. (CMW500)

6.11.2. Test Result

Note: Reference original report Grant Date: 08/27/2024, FCC ID: HD5-CK67X0N.

6.12. Proper Power Adjustment, Client Devices Connected to a Standard Power Access Point

6.12.1. Test Limit

Note:

1. The EUT is a Dual Client Device
2. The test was executed with the SP AP(CMW500) authorized to transmit up to 12dBm, 24dBm, and 36dBm on Ch. 5 (5975 MHz) and Ch. 133 (6615 MHz).
3. The lowest 12dBm power level is based on the EIRP resulting from the conducted power targets specified in the manufacturer's □WLAN Tune up Procedure Document□.
4. The EUT was connected via a conducted connection to the spectrum analyzer. Simultaneously, the EUT was able to see and establish a conducted connection with the standard power access point. (CMW500)

6.12.2. Test Result

Note: Reference original report Grant Date: 08/27/2024, FCC ID: HD5-CK67X0N.

7. Conclusion

The data collected relate only the item(s) tested and show that the device is in compliance with Part 15E of the FCC rules.

Appendix A : Test Setup Photograph

Refer to “2411TW0118-UT” file.

Appendix B : External Photograph

Refer to “2411TW0118-UE” file.

Appendix C : Internal Photograph

Refer to “2411TW0118-UI” file.

The End
