

FCC SAR TEST REPORT

FCC ID : HD5-CK67X1N
Equipment : Mobile Computer
Brand Name : Honeywell
Model Name : CK67X1N
Applicant : Honeywell International Inc
9680 Old Bailes Rd. Fort Mill, SC 29707 United States
Manufacturer : Honeywell International Inc
9680 Old Bailes Rd. Fort Mill, SC 29707 United States
Standard : FCC 47 CFR Part 2 (2.1093)

The product was received on Sep. 20, 2024 and testing was started from Dec. 20, 2024 and completed on Dec. 20, 2024. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample provide by manufacturer and the test data has been evaluated in accordance with the test procedures given in 47 CFR Part 2.1093 and FCC KDB and has been pass the FCC requirement.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. Laboratory, the test report shall not be reproduced except in full.



Approved by: Cona Huang / Deputy Manager



Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan



Table of Contents

1. Statement of Compliance	4
2. Equipment Under Test (EUT) Information	5
2.1 General Information	5
3. Guidance Applied	6
3.1 General LTE SAR Test and Reporting Considerations	7
3.2 General 5G NR SAR Test and Reporting Considerations	11
4. Smart Transmit feature for RF Exposure compliance	14
5. RF Exposure Limits	16
5.1 Uncontrolled Environment	16
5.2 Controlled Environment	16
5.3 RF Exposure limit for above 6GHz	17
6. Specific Absorption Rate (SAR)	18
6.1 Introduction	18
6.2 SAR Definition	18
7. System Description and Setup	19
7.1 Test Site Location	19
7.2 E-Field Probe	20
7.3 Data Acquisition Electronics (DAE)	20
7.4 Phantom	21
7.5 Device Holder	22
8. Measurement Procedures	23
8.1 Spatial Peak SAR Evaluation	23
8.2 Power Reference Measurement	24
8.3 Area Scan	24
8.4 Zoom Scan	25
8.5 Volume Scan Procedures	25
8.6 Power Drift Monitoring	25
9. Test Equipment List	26
10. System Verification	27
10.1 Tissue Verification	27
10.2 System Performance Check Results	27
11. RF Exposure Positions	28
11.1 Body Worn Accessory	28
11.2 Product Specific Exposure	29
11.3 Wireless Router	29
12. LTE Output Power (Unit: dBm)	30
13. Antenna Location	37
14. SAR Test Results	38
14.1 Hotspot SAR	39
14.2 Body Worn Accessory SAR	39
14.3 Product Specific SAR	40
15. Uncertainty Assessment	41
16. References	43
Appendix A. Plots of SAR and PD System Performance Check	
Appendix B. Plots of High SAR and PD Measurement	
Appendix C. DASY Calibration Certificate	
Appendix D. Test Setup Photos	

History of this test report

Report No.	Version	Description	Issued Date
FA510204	01	Initial issue of report	Feb. 24, 2025



1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) for Honeywell International Inc, Mobile Computer, CK67X1N, are as follows.

Equipment Class	Frequency Band	Highest SAR Summary			Highest Simultaneous Transmission 1g SAR (W/kg)	Highest Simultaneous Transmission 10g SAR (W/kg)
		Hotspot (Separation 10mm)	Body-worn (Separation 15mm)	Product Specific (Separation 0mm)		
		1g SAR (W/kg)		10g SAR (W/kg)		
Licensed	LTE Band 7	0.85	0.10	0.89	1.15	2.67
	LTE Band 12/17	0.29	0.14	0.46		
	LTE Band 13	0.52	0.19	0.81		
	LTE Band 14	0.54	0.19	0.72		
	LTE Band 2/25	0.58	0.12	0.90		
	LTE Band 5/26	0.53	0.22	0.81		
	LTE Band 30	0.62	0.14	0.89		
	LTE Band 4/66	0.69	0.13	0.82		
	LTE Band 71	0.26	0.10	0.42		
	LTE Band 38/41	0.76	0.09	0.90		
	LTE Band 42	0.53	0.51	0.78		
	LTE Band 43	0.56	0.70	0.91		
	LTE Band 48	0.53	0.65	0.91		
	FR1 n7	0.62	0.11	0.80		
	FR1 n12	0.21	0.13	0.48		
	FR1 n13	0.43	0.22	0.79		
	FR1 n14	0.45	0.20	0.77		
	FR1 n2/n25	0.58	0.12	0.86		
	FR1 n5/n26	0.43	0.20	0.72		
	FR1 n30	0.45	0.20	0.87		
	FR1 n66	0.65	0.18	0.89		
	FR1 n71	0.21	0.08	0.46		
	FR1 n38/n41	0.76	0.25	0.25		
	FR1 n48	0.70	0.68	1.19		
	FR1 n77/n78	0.67	0.64	0.97		
DTS	2.4GHz WLAN	0.19	0.09	0.32	1.12	2.67
NII	5GHz WLAN	0.58	0.26	1.60	1.15	2.67
6CD	6GHz WLAN		0.05	0.28	1.15	2.67
DSS	Bluetooth		< 0.01	< 0.01	1.03	2.66
DXX	NFC			0.05		2.67
Equipment Class	Frequency Band	Reported APD (mW/cm^2)			Reported PD (mW/cm^2)	
		Body Worn		Extremity		
6CD	6GHz WLAN	0.05		0.65	0.57	
Date of Testing:		2024/12/20				

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation and the FCC designation No. TW3786 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test. This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body 1g SAR, 4.0 W/kg for Product Specific 10g SAR) specified in FCC 47 CFR part 2 (2.1093), Human Exposure to RF Radiation Limits (1.0 mW/cm²=10 W/m²) specified in FCC 47 CFR part 1.1310 and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.

Reviewed by: Jason Wang

Report Producer: Carlie Tsai



2. Equipment Under Test (EUT) Information

2.1 General Information

Product Feature & Specification	
Equipment Name	Mobile Computer
Brand Name	Honeywell
Model Name	CK67X1N
FCC ID	HD5-CK67X1N
Wireless Technology and Frequency Range	LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 14: 788 MHz ~ 798 MHz LTE Band 17: 704 MHz ~ 716 MHz LTE Band 25: 1850 MHz ~ 1915 MHz LTE Band 26: 814 MHz ~ 849 MHz LTE Band 30: 2305 MHz ~ 2315 MHz LTE Band 38: 2570 MHz ~ 2620 MHz LTE Band 41: 2496 MHz ~ 2690 MHz LTE Band 42: 3450 MHz ~ 3550 MHz, 3550 MHz ~ 3600 MHz LTE Band 43: 3600 MHz ~ 3700 MHz, 3700 MHz ~ 3800 MHz LTE Band 48: 3550 MHz ~ 3700 MHz LTE Band 66: 1710 MHz ~ 1780 MHz LTE Band 71: 663 MHz ~ 698 MHz 5G NR n2 : 1850 MHz ~ 1910 MHz 5G NR n5 : 824 MHz ~ 849 MHz 5G NR n7 : 2500 MHz ~ 2570 MHz 5G NR n12 : 699 MHz ~ 716 MHz 5G NR n13 : 777 MHz ~ 787 MHz 5G NR n14 : 788 MHz ~ 798 MHz 5G NR n25 : 1850 MHz ~ 1915 MHz 5G NR n26 : 814 MHz ~ 849 MHz 5G NR n30 : 2305 MHz ~ 2315 MHz 5G NR n38 : 2570 MHz ~ 2620 MHz 5G NR n41 : 2496 MHz ~ 2690 MHz 5G NR n48 : 3550 MHz ~ 3700 MHz 5G NR n66 : 1710 MHz ~ 1780 MHz 5G NR n71 : 663 MHz ~ 698 MHz 5G NR n77: 3700 MHz ~ 3980 MHz, 3450 MHz ~ 3550 MHz 5G NR n78: 3700 MHz ~ 3800 MHz, 3450 MHz ~ 3550 MHz WLAN 2.4 GHz Band: 2400 MHz ~ 2483.5 MHz WLAN 5.2 GHz Band: 5150 MHz ~ 5250 MHz WLAN 5.3 GHz Band: 5250 MHz ~ 5350 MHz WLAN 5.6 GHz Band: 5470 MHz ~ 5725 MHz WLAN 5.8 GHz Band: 5725 MHz ~ 5850 MHz WLAN 5.9 GHz Band: 5850 MHz ~ 5895 MHz WLAN 6GHz Band: 5925 MHz ~ 6425 MHz, 6425 MHz ~ 6525 MHz, 6525 MHz ~ 6875 MHz, 6875 MHz ~ 7125 MHz Bluetooth: 2400 MHz ~ 2483.5 MHz NFC: 13.56 MHz
Mode	LTE: QPSK, 16QAM, 64QAM, 256QAM 5G NR: DFT-s-OFDM/CP-OFDM, Pi/2 BPSK/QPSK/16QAM/64QAM/256QAM WLAN: 802.11a/b/g/n/ac/ax HT20/HT40/VHT20/VHT40/VHT80/VHT160/HE20/HE40/HE80/HE160 Bluetooth BR/EDR/LE NFC: ASK
EUT Stage	Engineering Sample
Remark: 1. Based on original report to enable LTE B42 part96 frequency range and also disable power class 2 for LTE B42 part27Q. 2. The SAR testing only for LTE B42 part96 frequency range in this report and the Sim-Tx analysis was not required due to new SAR result was not higher than original report no.: FA461705-01B. 3. Part2 validation is not required, due to worst plimit was not changed per Smart transmit validation procedure. 4. The RF exposure selects Scanner (S0803FR) + Keypad (AlphaNumeric) as the main test, the other scanner / keypad / holster spot check worst case. 5. Minimum 15 mm separation distance will be produced when using scan handle for this device, there is no requirement to additionally test and SAR can be covered by Extremity exposure condition.	

Sample List			
Scanner	Keypad	Holster	Scan Handle
S0803FR	AlphaNumeric	Holster 1 (815-087-001)	Scan Handle 1
S0703	Numeric	Holster 2 (815-088-001)	
S0803	Large Numeric		
	53keys AlphaNumeric		
	42keys Numeric		

3. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards, the below KDB standard may not including in the TAF code without accreditation.

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 941225 D05 SAR for LTE Devices v02r05
- FCC KDB 941225 D05A Rel.10 LTE SAR Test Guidance v01r02
- FCC KDB 941225 D06 Hotspot Mode SAR v02r01
- IEC/IEEE 62209-1528:2020
- SPEAG DASY6 System Handbook
- SPEAG DASY6 Application Note (Interim Procedure for Device Operation at 6GHz-10GHz)



3.1 General LTE SAR Test and Reporting Considerations

Summarized necessary items addressed in KDB 941225 D05 v02r05																																																																										
FCC ID	HD5-CK67X1N																																																																									
Equipment Name	Mobile Computer																																																																									
Operating Frequency Range of each LTE transmission band	LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 14: 788 MHz ~ 798 MHz LTE Band 17: 704 MHz ~ 716 MHz LTE Band 25: 1850 MHz ~ 1915 MHz LTE Band 26: 814 MHz ~ 849 MHz LTE Band 30: 2305 MHz ~ 2315 MHz LTE Band 38: 2570 MHz ~ 2620 MHz LTE Band 41: 2496 MHz ~ 2690 MHz LTE Band 42: 3450 MHz ~ 3550 MHz, 3550MHz ~ 3600MHz LTE Band 43: 3600 MHz ~ 3700 MHz, 3700 MHz ~ 3800MHz LTE Band 48: 3550 MHz ~ 3700 MHz LTE Band 66: 1710 MHz ~ 1780 MHz LTE Band 71: 663 MHz ~ 698 MHz																																																																									
Channel Bandwidth	LTE Band 2:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 4:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 5:1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 7: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 12:1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 13: 5MHz, 10MHz LTE Band 14: 5MHz, 10MHz LTE Band 17: 5MHz, 10MHz LTE Band 25:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 26:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz LTE Band 30: 5MHz, 10MHz LTE Band 38: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 41: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 42: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 43: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 48: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 66:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 71: 5MHz, 10MHz, 15MHz, 20MHz																																																																									
uplink modulations used	QPSK / 16QAM / 64QAM / 256QAM																																																																									
LTE Voice / Data requirements	Data only																																																																									
LTE MPR permanently built-in by design	<table><tr><th colspan="8">Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3</th></tr><tr><th rowspan="2">Modulation</th><th colspan="6">Channel bandwidth / Transmission bandwidth (N_{RB})</th><th rowspan="2">MPR (dB)</th></tr><tr><th>1.4 MHz</th><th>3.0 MHz</th><th>5 MHz</th><th>10 MHz</th><th>15 MHz</th><th>20 MHz</th></tr><tr><td>QPSK</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 1</td></tr><tr><td>16 QAM</td><td>≤ 5</td><td>≤ 4</td><td>≤ 8</td><td>≤ 12</td><td>≤ 16</td><td>≤ 18</td><td>≤ 1</td></tr><tr><td>16 QAM</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 2</td></tr><tr><td>64 QAM</td><td>≤ 5</td><td>≤ 4</td><td>≤ 8</td><td>≤ 12</td><td>≤ 16</td><td>≤ 18</td><td>≤ 2</td></tr><tr><td>64 QAM</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 3</td></tr><tr><td>256 QAM</td><td colspan="6">≥ 1</td><td>≤ 5</td></tr></table>				Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3								Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2	64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3	256 QAM	≥ 1						≤ 5
Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3																																																																										
Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)																																																																			
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																																																				
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																																																			
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																																																			
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																																																			
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2																																																																			
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3																																																																			
256 QAM	≥ 1						≤ 5																																																																			
LTE A-MPR	In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)																																																																									
Spectrum plots for RB configuration	A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																																																									
Power reduction applied to satisfy SAR compliance	The device has several different power modes for each exposure conditions SAR compliance; power selection is determined by the device's positioning and usage scenarios. Detail refer to operational description.																																																																									
LTE Carrier Aggregation Combinations	The carrier aggregation combinations referred to original report no.: FA461705-01B section 12.																																																																									
LTE Carrier Aggregation Additional Information	This device supports maximum of 4 carriers in the downlink and 2 carriers in the uplink. Additional following LTE Release features are not supported: Relay, HetNet, Enhanced MIMO, eICI, WiFi Offloading, MDH, eMBMA, Cross-Carrier Scheduling, Enhanced SC-FDMA																																																																									

Transmission (H, M, L) channel numbers and frequencies in each LTE band												
LTE Band 2												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900
LTE Band 4												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745
LTE Band 5												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20407	824.7	20415	825.5	20425	826.5	20450	829	20450	829	20450	829
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5	20525	836.5	20525	836.5
H	20643	848.3	20635	847.5	20625	846.5	20600	844	20600	844	20600	844
LTE Band 7												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz		Bandwidth 25 MHz		Bandwidth 30 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20775	2502.5	20800	2505	20825	2507.5	20850	2510	20850	2510	20850	2510
M	21100	2535	21100	2535	21100	2535	21100	2535	21100	2535	21100	2535
H	21425	2567.5	21400	2565	21375	2562.5	21350	2560	21350	2560	21350	2560
LTE Band 12												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	23017	699.7	23025	700.5	23035	701.5	23060	704	23060	704	23060	704
M	23095	707.5	23095	707.5	23095	707.5	23095	707.5	23095	707.5	23095	707.5
H	23173	715.3	23165	714.5	23155	713.5	23130	711	23130	711	23130	711
LTE Band 13												
	Bandwidth 5 MHz				Bandwidth 10 MHz				Bandwidth 15 MHz			
	Channel #		Freq.(MHz)		Channel #		Freq.(MHz)		Channel #		Freq.(MHz)	
L	23205		779.5		23230		782		23230		782	
M	23230		782									
H	23255		784.5									
LTE Band 14												
	Bandwidth 5 MHz				Bandwidth 10 MHz				Bandwidth 15 MHz			
	Channel #		Channel #		Channel #		Freq.(MHz)		Channel #		Freq.(MHz)	
L	23305		790.5		23330		793		23330		793	
M	23330		793									
H	23355		795.5									
LTE Band 17												
	Bandwidth 5 MHz				Bandwidth 10 MHz				Bandwidth 15 MHz			
	Channel #		Freq.(MHz)		Channel #		Freq. (MHz)		Channel #		Freq. (MHz)	
L	23755		706.5		23780		709		23780		709	
M	23790		710		23790		710		23790		710	
H	23825		713.5		23800		711		23800		711	

LTE Band 25												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	26047	1850.7	26055	1851.5	26065	1852.5	26090	1855	26115	1857.5	26140	1860
M	26340	1880	26340	1880	26340	1880	26340	1880	26340	1880	26340	1880
H	26683	1914.3	26675	1913.5	26665	1912.5	26640	1910	26615	1907.5	26590	1905
LTE Band 26												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	26697	814.7	26705	815.5	26715	816.5	26740	819	26765	821.5	26790	824
M	26865	831.5	26865	831.5	26865	831.5	26865	831.5	26865	831.5	26865	831.5
H	27033	848.3	27025	847.5	27015	846.5	26990	844	26965	841.5	26940	839
LTE Band 30												
	Bandwidth 5 MHz					Bandwidth 10 MHz						
	Channel #			Freq.(MHz)		Channel #				Freq.(MHz)		
L	27685			2307.5		27710				2310		
M	27710			2310								
H	27735			2312.5								
LTE Band 38												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz		Bandwidth 25 MHz		Bandwidth 30 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	37775	2572.5	37800	2575	37825	2577.5	37850	2580	37875	2582.5	37900	2585
M	38000	2595	38000	2595	38000	2595	38000	2595	38000	2595	38000	2595
H	38225	2617.5	38200	2615	38175	2612.5	38150	2610	38125	2607.5	38100	2605
LTE Band 41												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz		Bandwidth 25 MHz		Bandwidth 30 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	39675	2498.5	39700	2501	39725	2503.5	39750	2506	39775	2508.5	39800	2511
L	40148	2545.8	40160	2547	40173	2548.3	40185	2549.5	40197	2550.7	40210	2552
M	40620	2593	40620	2593	40620	2593	40620	2593	40620	2593	40620	2593
H	41093	2640.3	41080	2639	41068	2637.8	41055	2636.5	41042	2635.2	41030	2634
H	41565	2687.5	41540	2685	41515	2682.5	41490	2680	41465	2677.5	41440	2675
LTE Band 42 (3450 MHz ~ 3550 MHz)												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz		Bandwidth 25 MHz		Bandwidth 30 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	42115	3452.5	42140	3455	42165	3457.5	42190	3460	42215	3462.5	42240	3465
M	42590	3500	42590	3500	42590	3500	42590	3500	42590	3500	42590	3500
H	43065	3547.5	43040	3545	43015	3542.5	42990	3540	42965	3537.5	42940	3535
LTE Band 42 (3550 MHz ~ 3600 MHz)												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz		Bandwidth 25 MHz		Bandwidth 30 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	43115	3552.5	43140	3555	43165	3557.5	43190	3560	43215	3562.5	43240	3565
M	43340	3575	43340	3575	43340	3575	43340	3575	43340	3575	43340	3575
H	43565	3597.5	43540	3595	43515	3592.5	43490	3590	43465	3587.5	43440	3585
LTE Band 43 (3600 MHz ~ 3700 MHz)												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz		Bandwidth 25 MHz		Bandwidth 30 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	43615	3602.5	43640	3605	43665	3607.5	43690	3610	43715	3612.5	43740	3615
M	44090	3650	44090	3650	44090	3650	44090	3650	44090	3650	44090	3650
H	44565	3697.5	44540	3695	44515	3692.5	44490	3690	44465	3687.5	44440	3685

LTE Band 43 (3700 MHz ~ 3800 MHz)												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	44615	3702.5	44640	3705	44665	3707.5	44690	3710				
M	45090	3750	45090	3750	45090	3750	45090	3750				
H	45565	3797.5	45540	3795	45515	3792.5	45490	3790				
LTE Band 48												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	55265	3552.5	55290	3555	55315	3557.5	55340	3560				
LM	55810	3607	55815	3607.5	55820	3608	55830	3609				
MH	56170	3643	56165	3642.5	56160	3642	56150	3641				
H	56715	3697.5	56690	3695	56665	3692.5	56640	3690				
LTE Band 66												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	131979	1710.7	131987	1711.5	131997	1712.5	132022	1715	132047	1717.5	132072	1720
M	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745
H	132665	1779.3	132657	1778.5	132647	1777.5	132622	1775	132597	1772.5	132572	1770
LTE Band 71												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	133147	665.5	133172	668	133197	670.5	133222	673				
M	133297	680.5	133297	680.5	133297	680.5	133297	680.5				
H	133447	695.5	133422	693	133397	690.5	133372	688				



3.2 General 5G NR SAR Test and Reporting Considerations

5G NR Information								
FCC ID	HD5-CK67X1N							
Equipment Name	Mobile Computer							
Operating Frequency Range of each 5G NR transmission band	5G NR n2 : 1850 MHz ~ 1910 MHz							
	5G NR n5 : 824 MHz ~ 849 MHz							
	5G NR n7 : 2500 MHz ~ 2570 MHz							
	5G NR n12 : 699 MHz ~ 716 MHz							
	5G NR n13 : 777 MHz ~ 787 MHz							
	5G NR n14 : 788 MHz ~ 798 MHz							
	5G NR n25 : 1850 MHz ~ 1915 MHz							
	5G NR n26 : 814 MHz ~ 849 MHz							
	5G NR n30 : 2305 MHz ~ 2315 MHz							
	5G NR n38 : 2570 MHz ~ 2620 MHz							
	5G NR n41 : 2496 MHz ~ 2690 MHz							
	5G NR n48 : 3550 MHz ~ 3700 MHz							
	5G NR n66 : 1710 MHz ~ 1780 MHz							
	5G NR n71 : 663 MHz ~ 698 MHz							
	5G NR n77: 3700 MHz ~ 3980 MHz, 3450 MHz ~ 3550 MHz							
5G NR n78: 3700 MHz ~ 3800 MHz, 3450 MHz ~ 3550 MHz								
Channel Bandwidth	5G NR n2: 5MHz, 10MHz, 15MHz, 20MHz							
	5G NR n5: 5MHz, 10MHz, 15MHz, 20MHz							
	5G NR n7: 5MHz, 10MHz, 15MHz, 20MHz, 25 MHz, 30MHz, 40MHz							
	5G NR n12: 5MHz, 10MHz, 15MHz							
	5G NR n13: 5MHz, 10MHz							
	5G NR n14: 5MHz, 10MHz							
	5G NR n25: 5MHz, 10MHz, 15MHz, 20MHz, 25 MHz 30MHz, 35MHz, 40MHz							
	5G NR n26: 5MHz, 10MHz, 15MHz, 20MHz							
	5G NR n30: 5MHz, 10MHz							
	5G NR n38: 10MHz, 15MHz, 20MHz, 30MHz, 40MHz							
	5G NR n41: 10MHz, 15MHz, 20MHz, 30MHz, 40MHz, 50MHz, 60MHz, 70MHz, 80MHz, 90MHz, 100MHz							
	5G NR n48: 10MHz, 15MHz, 20MHz, 30MHz, 40MHz							
	5G NR n66: 5MHz, 10MHz, 15MHz, 20MHz, 25 MHz, 30MHz, 35MHz, 40MHz							
	5G NR n71: 5MHz, 10MHz, 15MHz, 20MHz							
	5G NR n77: 10MHz, 15MHz, 20MHz, 30MHz, 40MHz, 50MHz, 60MHz, 70MHz, 80MHz, 90MHz, 100MHz							
5G NR n78: 10MHz, 15MHz, 20MHz, 30MHz, 40MHz, 50MHz, 60MHz, 70MHz, 80MHz, 90MHz, 100MHz								
SCS	FDD: SCS15KHz, TDD: SCS30KHz							
uplink modulations used	DFT-s-OFDM: PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM CP-OFDM QPSK / 16QAM / 64QAM / 256QAM							
A-MPR (Additional MPR) disabled for SAR Testing?	Yes							
LTE Anchor Bands for n2	LTE B5/7/12/13/14/30/66							
LTE Anchor Bands for n5	LTE B2/30/48/66							
LTE Anchor Bands for n7	LTE B5/12							
LTE Anchor Bands for n12	LTE B2							
LTE Anchor Bands for n25	LTE B12							
LTE Anchor Bands for n30	LTE B14							
LTE Anchor Bands for n38	LTE B12/71							
LTE Anchor Bands for n41	LTE B2/12/25/26/66							
LTE Anchor Bands for n66	LTE B2/5/7/12/13/14/30/48/71							
LTE Anchor Bands for n71	LTE B2/7/66							
LTE Anchor Bands for n77	LTE B2/5/7/12/13/14/25/30/66							
LTE Anchor Bands for n78	LTE B2/4/5/12/25/38/66/71							
NR Band 2								
	Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	370500	1852.5	371000	1855	371500	1857.5	372000	1860
M	376000	1880	376000	1880	376000	1880	376000	1880
H	381500	1907.5	381000	1905	380500	1902.5	380000	1900
NR Band 5								
	Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	165300	826.5	165800	829	166300	831.5	166800	834
M	167300	836.5	167300	836.5	167300	836.5	167300	836.5
H	169300	846.5	168800	844	168300	841.5	167800	839



NR Band 7																						
	Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz		Bandwidth 25MHz		Bandwidth 30MHz		Bandwidth 40MHz									
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)								
L	500500	2502.5	501000	2505	501500	2507.5	502000	2510	502500	2512.5	503000	2515	504000	2520								
M	507000	2535	507000	2535	507000	2535	507000	2535	507000	2535	507000	2535	507000	2535								
H	513500	2567.5	513000	2565	512500	2562.5	512000	2560	511500	2557.5	511000	2555	510000	2550								
NR Band 12																						
	Bandwidth 5MHz				Bandwidth 10MHz				Bandwidth 15MHz													
	Ch. #		Freq. (MHz)		Ch. #		Freq. (MHz)		Ch. #		Freq. (MHz)											
L	140300		701.5		140800		704		141300		706.5											
M	141500		707.5		141500		707.5		141500		707.5											
H	142700		713.5		142200		711		141700		708.5											
NR Band 13																						
	Bandwidth 5MHz						Bandwidth 10MHz															
	Ch. #			Freq. (MHz)			Ch. #			Freq. (MHz)												
L	155900			779.5			156400			782												
M	156400			782																		
H	156900			784.5																		
NR Band 14																						
	Bandwidth 5MHz						Bandwidth 10MHz															
	Ch. #			Freq. (MHz)			Ch. #			Freq. (MHz)												
L	158100			790.5			158600			793												
M	158600			793																		
H	159100			795.5																		
NR Band 25																						
	Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz		Bandwidth 25MHz		Bandwidth 30MHz		Bandwidth 35MHz		Bandwidth 40MHz							
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)						
L	370500	1852.5	371000	1855	371500	1857.5	372000	1860	372500	1862.5	373000	1865	373500	1867.5	374000	1870						
M	376500	1882.5	376500	1882.5	376500	1882.5	376500	1882.5	376500	1882.5	376500	1882.5	376500	1882.5	376500	1882.5						
H	382500	1912.5	382000	1910	381500	1907.5	381000	1905	380500	1902.5	380000	1900	379500	1897.5	379000	1895						
NR Band 26																						
	Bandwidth 5MHz			Bandwidth 10MHz			Bandwidth 15MHz			Bandwidth 20MHz												
	Ch. #		Freq. (MHz)	Ch. #		Freq. (MHz)	Ch. #		Freq. (MHz)	Ch. #		Freq. (MHz)										
L	165300		826.5	165800		829	166300		831.5	166800		834										
M	167300		836.5	167300		836.5	167300		836.5	167300		836.5										
H	169300		846.5	168800		844	168300		841.5	167800		839										
NR Band 30																						
	Bandwidth 5MHz						Bandwidth 10MHz															
	Ch. #			Freq. (MHz)			Ch. #			Freq. (MHz)												
L	461500			2307.5			462000			2310												
M	462000			2310																		
H	462500			2312.5																		
NR Band 38																						
	Bandwidth 10MHz			Bandwidth 15MHz			Bandwidth 20MHz			Bandwidth 30MHz			Bandwidth 40MHz									
	Ch. #		Freq. (MHz)	Ch. #		Freq. (MHz)	Ch. #		Freq. (MHz)	Ch. #		Freq. (MHz)	Ch. #		Freq. (MHz)							
L	515004		2575.02	515502		2577.51	516000		2580	517002		2585.01	518004		2590.02							
M	519000		2595	519000		2595	519000		2595	519000		2595	519000		2595							
H	522996		2614.98	522498		2612.49	522000		2610	520998		2604.99	519996		2599.98							
NR Band 41																						
	Bandwidth10MHz		Bandwidth15MHz		Bandwidth20MHz		Bandwidth30MHz		Bandwidth 40MHz		Bandwidth 50MHz		Bandwidth 60MHz		Bandwidth70MHz		Bandwidth 80MHz		Bandwidth 90MHz		Bandwidth100MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	500202	2501.01	500700	2503.5	501204	2506.02	502200	2511	503202	2516.01	504204	2521.02	505200	2526	506202	2531.01	507204	2536.02	508200	2541	509202	2546.01
M	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99
H	537000	2685	536496	2682.48	535998	2679.99	534996	2674.98	534000	2670	532998	2664.99	531996	2659.98	531000	2655	529998	2649.99	528996	2644.98	528000	2640



NR Band 48																						
	Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz		Bandwidth 30MHz		Bandwidth 40MHz													
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)												
L	637000	3555	637168	3557.52	637334	3560.01	637668	3565.02	638000	3570												
M	641666	3624.99	641666	3624.99	641666	3624.99	641666	3624.99	641666	3624.99												
H	646332	3694.98	646166	3692.49	646000	3690	645666	3684.99	645332	3679.98												
NR Band 66																						
	Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz		Bandwidth 30MHz		Bandwidth 35MHz		Bandwidth 40MHz									
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)								
L	342500	1712.5	343000	1715	343500	1717.5	344000	1720	345000	1725	345500	1727.5	346000	1730								
M	349000	1745	349000	1745	349000	1745	349000	1745	349000	1745	349000	1745	349000	1745								
H	355500	1777.5	355000	1775	354500	1772.5	354000	1770	353000	1765	352500	1762.5	352000	1760								
NR Band 71																						
	Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz															
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)														
L	133100	665.5	133600	668	13410	670.5	134600	673														
M	136100	680.5	136100	680.5	136100	680.5	136100	680.5														
H	139100	695.5	138600	693	13810	690.5	137600	688														
NR Band 77_Part 270																						
	Bandwidth10MHz		Bandwidth15MHz		Bandwidth 20MHz		Bandwidth30MHz		Bandwidth 40MHz		Bandwidth 50MHz		Bandwidth 60MHz		Bandwidth 70MHz		Bandwidth 80MHz		Bandwidth 90MHz		Bandwidth100MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	647000	3705	647168	3707.52	647334	3710.01	647668	3715.02	648000	3720	648334	3725.01	648668	3730.02	649000	3735	649334	3740.01	649668	3745.02	650000	3750
M	656000	3840	656000	3840	656000	3840	656000	3840	656000	3840	656000	3840	656000	3840	656000	3840	656000	3840	656000	3840	656000	3840
H	665000	3975	664832	3972.48	664666	3969.99	664332	3964.98	664000	3960	663666	3954.99	663332	3949.98	663000	3945	662666	3939.99	662332	3934.98	662000	3930
NR Band 78_Part 270																						
	Bandwidth10MHz		Bandwidth15MHz		Bandwidth 20MHz		Bandwidth30MHz		Bandwidth 40MHz		Bandwidth 50MHz		Bandwidth 60MHz		Bandwidth 70MHz		Bandwidth 80MHz		Bandwidth 90MHz		Bandwidth100MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	647000	3705	647168	3707.52	647334	3710.01	647668	3715.02	648000	3720	648334	3725.01	648668	3730.02	649000	3735	649334	3740.01	649668	3745.02	650000	3750
M	650000	3750	650000	3750	650000	3750	650000	3750	650000	3750	650000	3750	650000	3750	650000	3750	650000	3750	650000	3750		
H	653000	3795	652832	3792.48	652666	3789.99	652332	3784.98	652000	3780	651666	3774.99	651332	3769.98	651000	3765	650666	3759.99	650332	3754.98		
NR Band 77/78 (3450 MHz ~ 3550 MHz)_Part 27Q																						
	Bandwidth10MHz		Bandwidth15MHz		Bandwidth 20MHz		Bandwidth30MHz		Bandwidth 40MHz		Bandwidth 50MHz		Bandwidth 60MHz		Bandwidth 70MHz		Bandwidth 80MHz		Bandwidth 90MHz		Bandwidth100MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	630334	3455.01	630500	3457.5	630668	3460.02	631000	3465	631334	3470.01	631668	3475.02	632000	3480	632334	3485.01	632668	3490.02	633000	3495	633332	3499.98
M	633332	3499.98	633332	3499.98	633332	3499.98	633332	3499.98	633332	3499.98	633332	3499.98	633332	3499.98	633332	3499.98	633332	3499.98	633332	3499.98		
H	636332	3544.98	636166	3542.49	636000	3540	635666	3534.99	635332	3529.98	635000	3525	634666	3519.99	634332	3514.98	634000	3510	633666	3504.99		

4. Smart Transmit feature for RF Exposure compliance

Smart Transmit allows the device to transmit at higher power instantaneously, as high as Pmax, when needed, but enforces power limiting to maintain time-averaged transmit power to Plimit. Below table shows Plimit EFS settings and maximum tune up output power Pmax configured for this EUT for various transmit conditions (Device State Index DSI).

*Pmax is used for RF tune up procedure. The maximum allowed output power is equal to Pmax + 1dB uncertainty.

**All Plimit power levels entered in the Table correspond to average power levels after accounting for duty cycle in the case TDD modulation schemes (for e.g., GSM & LTE TDD & NR TDD).

The max allowed output power is the Plimit + 1dB device uncertainty, and if Plimit is higher than Pmax, the device output power will be Pmax instead.

<P_{limit} for supported technologies and bands (P_{limit} in EFS file)>

Band	Duty cycle	Antenna	DSI 0 Body/Limbs Plimit (dB)	DSI 1 Hotspot Plimit (dB)	Pmax*	Uncertainty (dB)
LTE Band 7_Ant 1	100.00%	1	19.6	22.0	24.0	1
LTE Band 12/17_Ant 0	100.00%	0	26.9	27.8	24.0	1
LTE Band 13_Ant 0	100.00%	0	24.9	25.7	24.5	1
LTE Band 14_Ant 0	100.00%	0	24.9	25.1	24.0	1
LTE Band 25/2_Ant 1	100.00%	1	22	24.8	24.0	1
LTE Band 26/5_Ant 0	100.00%	0	23.7	24.7	24.0	1
LTE Band 30_Ant 1	100.00%	1	22	24.9	24.0	1
LTE Band 66/4_Ant 1	100.00%	1	21.4	23.1	24.5	1
LTE Band 71_Ant 0	100.00%	0	27.3	28.2	24.0	1
LTE Band 41/38_Ant 1**	62.90%	1	19.9	22.1	22.0	1
LTE Band 41_Ant 1_HPUE**	42.90%	1	20.8	22.7	22.8	1
LTE Band 42_Ant 6 **	62.90%	6	19.5	18.7	22.0	1
LTE Band 43_Ant 6**	62.90%	6	20.7	19.5	21.5	1
LTE Band 48_Ant 6**	62.90%	6	20.8	19.2	21.5	1
FR1 n7_Ant 1	100.00%	1	20	22.6	24.0	1
FR1 n12_Ant 0	100.00%	0	26.7	29.1	24.0	1
FR1 n13_Ant 0	100.00%	0	24.5	26.1	24.0	1
FR1 n14_Ant 0	100.00%	0	24.6	25.9	24.0	1
FR1 n25/n2_Ant 1	100.00%	1	21.1	24.8	24.0	1
FR1 n26/n5_Ant 0	100.00%	0	23.9	25.0	24.0	1
FR1 n30_Ant 1	100.00%	1	23.6	25.9	24.0	1
FR1 n66_Ant 1	100.00%	1	21	24.8	24.5	1
FR1 n71_Ant 0	100.00%	0	26.9	29.3	24.0	1
FR1 n41/n38_Ant 1	100.00%	1	20.6	22.2	24.0	1
FR1 n41_Ant 1_HPUE**	50.00%	1	20.6	22.3	24.0	1
FR1 n41_Ant 2+1(2)	100.00%	2	20.1	19.9	19.5	1
FR1 n41_Ant 2+1(2)_HPUE**	50.00%	2	20.4	20.1	19.5	1

Band	Duty cycle	Antenna	DSI 0 Body/Limbs Plimit (dB)	DSI 1 Hotspot Plimit (dB)	Pmax*	Uncertainty (dB)
FR1 n48_Ant 3	100.00%	3	21.5	19.3	22.9	1
FR1 n48_Ant 4	100.00%	4	20.3	18.5	22.9	1
FR1 n48_Ant 5+6(5)	100.00%	5	22.7	19.4	20.0	1
FR1 n48_Ant 6	100.00%	6	21.3	19.8	23.5	1
FR1 n77/78_Ant 3	100.00%	3	19	16.7	23.4	1
FR1 n77/78_Ant 3_HPUE**	50.00%	3	19.4	16.6	22.9	1
FR1 n77/78_Ant 4	100.00%	4	16.4	17.7	23.4	1
FR1 n77/78_Ant 4_HPUE**	50.00%	4	16.4	17.9	22.9	1
FR1 n77/78_Ant 5+6(5)	100.00%	5	19.7	17.4	19.5	1
FR1 n77/78_Ant 5+6(5)_HPUE**	50.00%	5	21	17.8	19.0	1
FR1 n77/78_Ant 6	100.00%	6	20.9	18.6	24.0	1
FR1 n77/78_Ant 6_HPUE**	50.00%	6	21	18.7	23.5	1

5. RF Exposure Limits

5.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

5.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

5.3 RF Exposure limit for above 6GHz

According to ANSI/IEEE C95.1-1992, the criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio frequency (RF) radiation as specified in §1.1310.

Peak Spatially Averaged Power Density was evaluated over a circular area of 4cm² per interim FCC Guidance for near-field power density evaluations per October 2018 TCB Workshop notes

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3-3.0	614	1.63	*(100)	6
3.0-30	1842/f	4.89/f	*(900/f ²)	6
30-300	61.4	0.163	1.0	6
300-1500			f/300	6
1500-100,000			5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500			f/1500	30
1500-100,000			1.0	30

6. Specific Absorption Rate (SAR)

6.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

6.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

7. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

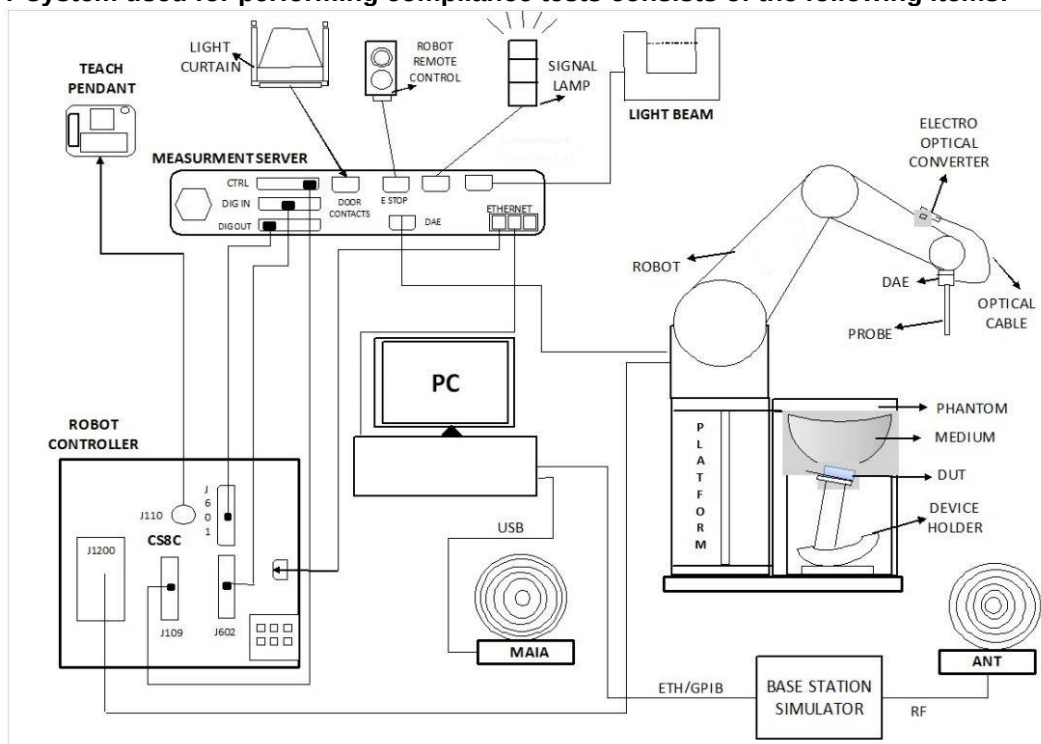

- The DASY system in SAR Configuration is shown above
- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running windows software and the DASY software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

7.1 Test Site Location

The SAR measurement facilities used to collect data are within both Sporton Lab list below test site location are accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190 and 3786) and the FCC designation No. TW1190 and TW3786 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test.

Laboratory	EMC & Wireless Communications Laboratory		Wensan Laboratory				
Test Site Location	TW1190 No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan		TW3786 No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan				
Test Site No.	SAR01-HY	SAR03-HY	SAR08-HY	SAR09-HY	SAR15-HY	SAR18-HY	SAR21-HY
	SAR04-HY	SAR05-HY	SAR11-HY	SAR12-HY	SAR16-HY	SAR19-HY	SAR22-HY
	SAR06-HY	SAR10-HY	SAR13-HY	SAR14-HY	SAR17-HY	SAR20-HY	

7.2 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

<ES3DV3 Probe>

Construction	Symmetric design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	4 MHz – 4 GHz; Linearity: ± 0.2 dB (30 MHz – 4 GHz)	
Directivity	± 0.2 dB in TSL (rotation around probe axis) ± 0.3 dB in TSL (rotation normal to probe axis)	
Dynamic Range	5 μ W/g – >100 mW/g; Linearity: ± 0.2 dB	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 3.9 mm (body: 12 mm) Distance from probe tip to dipole centers: 3.0 mm	

<EX3DV4 Probe>

Construction	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	4 MHz – >6 GHz Linearity: ± 0.2 dB (30 MHz – 6 GHz)	
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)	
Dynamic Range	10 μ W/g – >100 mW/g Linearity: ± 0.2 dB (noise: typically <1 μ W/g)	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

7.3 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.

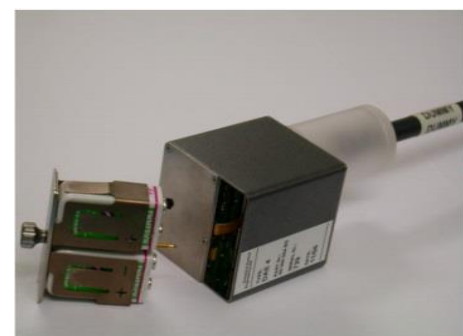


Fig 5.1 Photo of DAE


7.4 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI Phantom>

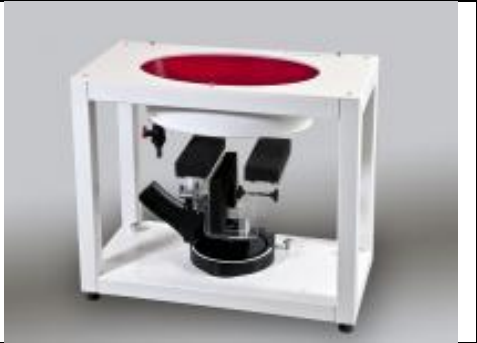Shell Thickness	2 ± 0.2 mm (sagging: <1%)	
Filling Volume	Approx. 30 liters	
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

7.5 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

8. Measurement Procedures

The measurement procedures are as follows:

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

8.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

8.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

8.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

8.4 Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

8.5 Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

8.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASy measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.

9. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	3500MHz System Validation Kit ⁽²⁾	D3500V2	1014	Jan. 17, 2022	Jan. 14, 2025
SPEAG	Data Acquisition Electronics	DAE4	703	Apr. 22, 2024	Apr. 21, 2025
SPEAG	Dosimetric E-Field Probe	EX3DV4	3931	Nov. 19, 2024	Nov. 18, 2025
Testo	Hygro meter	608-H1	45196600	Oct. 28, 2024	Oct. 27, 2025
Anritsu	Radio Communication Analyzer	MT8821C	6201341950	Nov. 12, 2024	Nov. 11, 2025
SPEAG	Device Holder	N/A	N/A	N/A	N/A
Anritsu	Signal Generator	MG3710A	6201502524	Sep. 24, 2024	Sep. 23, 2025
Keysight	ENA Network Analyzer	E5071C	MY46104758	Oct. 20, 2024	Oct. 19, 2025
SPEAG	Dielectric Probe Kit	DAK-3.5	1126	Sep. 17, 2024	Sep. 16, 2025
LINE SEIKI	Digital Thermometer	DTM3000-spezial	3690	Aug. 07, 2024	Aug. 06, 2025
Anritsu	Power Meter	ML2495A	1419002	Aug. 13, 2024	Aug. 12, 2025
Anritsu	Power Sensor	MA2411B	1911176	Aug. 13, 2024	Aug. 12, 2025
Anritsu	Spectrum Analyzer	MS2830A	6201396378	Jul. 09, 2024	Jul. 08, 2025
Mini-Circuits	Power Amplifier	ZVE-8G+	6418	Oct. 23, 2024	Oct. 22, 2025
ATM	Dual Directional Coupler	C122H-10	P610410z-02	Note 1	
Warison	Directional Coupler	WCOU-10-50S-10	WR889BMC4B1	Note 1	
Woken	Attenuator 1	WK0602-XX	N/A	Note 1	
PE	Attenuator 2	PE7005-10	N/A	Note 1	
PE	Attenuator 3	PE7005- 3	N/A	Note 1	

General Note:

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.
2. The dipole calibration interval can be extended to 3 years with justification according to KDB 865664 D01. The dipoles are also not physically damaged, or repaired during the interval. The justification data in appendix C can be found which the return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration for each dipole.

10. System Verification

10.1 Tissue Verification

The tissue dielectric parameters of tissue-equivalent media used for SAR measurements must be characterized within a temperature range of 18°C to 25°C, measured with calibrated instruments and apparatuses, such as network analyzers and temperature probes. The temperature of the tissue-equivalent medium during SAR measurement must also be within 18°C to 25°C and within $\pm 2^\circ\text{C}$ of the temperature when the tissue parameters are characterized. The tissue dielectric measurement system must be calibrated before use. The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements.

The liquid tissue depth was at least 15cm in the phantom for all SAR testing

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity Target (σ)	Permittivity Target (ϵ_r)	Delta (σ) (%)	Delta (ϵ_r) (%)	Limit (%)	Date
3500	22.6	2.920	37.100	2.91	37.90	0.34	-2.11	± 5	2024/12/20

10.2 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Test Site	Date	Frequency (MHz)	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)	Measured 10g SAR (W/kg)	Targeted 10g SAR (W/kg)	Normalized 10g SAR (W/kg)	Deviation (%)
SAR-19	2024/12/20	3500	100	D3500V2-1014	EX3DV4 - SN3931	DAE4 Sn703	6.690	67.200	66.9	-0.45	2.600	25.100	26	3.59

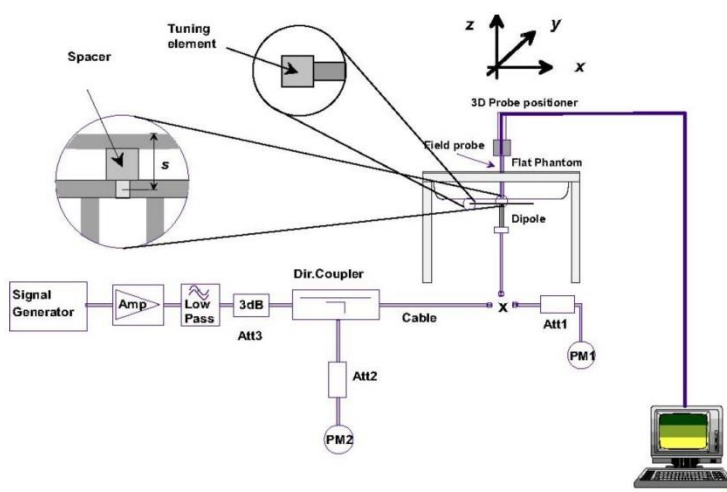


Fig 8.3.1 System Performance Check Setup



Fig 8.3.2 Setup Photo

11. RF Exposure Positions

11.1 Body Worn Accessory

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 9.4). Per KDB648474 D04v01r03, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is $> 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are tested with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-chip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

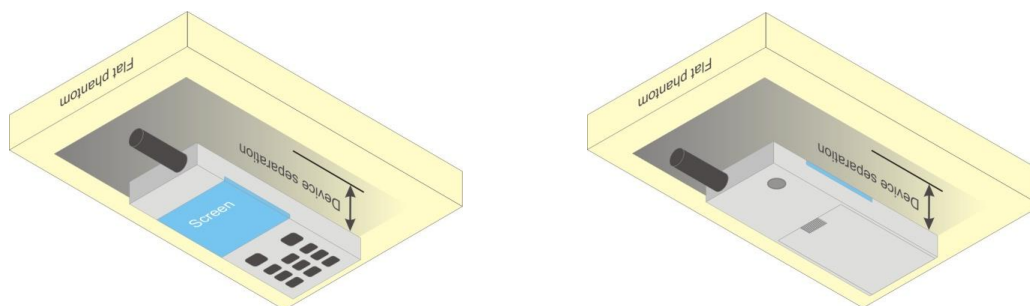


Fig 9.4 Body Worn Position



11.2 Product Specific Exposure

For smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, According to KDB648474 D04v01r03, the following phablet procedures should be applied to evaluate SAR compliance for each applicable wireless modes and frequency band. Devices marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance

1. The normally required head and body-worn accessory SAR test procedures for handsets, including hotspot mode, must be applied.
2. The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge, in direct contact with a flat phantom, for 10-g extremity SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions.⁶ The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.

11.3 Wireless Router

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 v02r01 where SAR test considerations for handsets ($L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

12. LTE Output Power (Unit: dBm)

<LTE Conducted Power>

General Note:

1. A Base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.

<TDD LTE SAR Measurement>

TDD LTE configuration setup for SAR measurement

SAR was tested with a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by 3GPP.

- 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations
- “special subframe S” contains both uplink and downlink transmissions, it has been taken into consideration to determine the transmission duty factor according to the worst case uplink and downlink cyclic prefix requirements for UpPTS
- Establishing connections with base station simulators ensure a consistent means for testing SAR and recommended for evaluating SAR. The Base station simulator was used for LTE output power measurements and SAR testing.

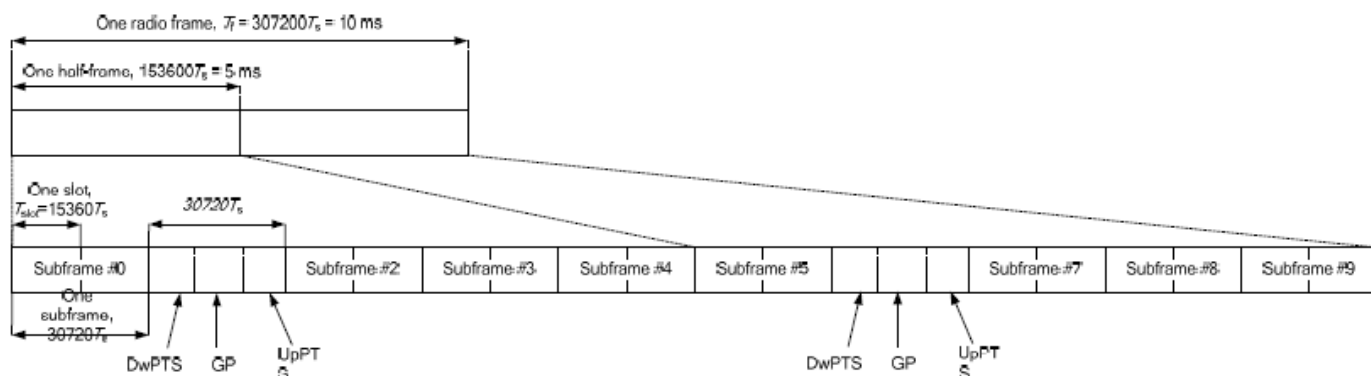


Figure 4.2-1: Frame structure type 2 (for 5 ms switch-point periodicity).

Table 4.2-2: Uplink-downlink configurations.

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$7680 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
5	$6592 \cdot T_s$			$20480 \cdot T_s$		
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$		
8	$24144 \cdot T_s$			-	-	-
9	$13168 \cdot T_s$			-	-	-

Special subframe (30720·T _s): Normal cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~4	7.13%	8.33%
	5~9	14.3%	16.7%

Special subframe(30720·T _s): Extended cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~3	7.13%	8.33%
	4~7	14.3%	16.7%

The highest duty factor is resulted from:

- Uplink-downlink configuration: 0. In a half-frame consisted of 5 subframes, uplink operation is in 3 uplink subframes and 1 special subframe.
- special subframe configuration: 5-9 for normal cyclic prefix in downlink, 4-7 for extended cyclic prefix in downlink
- for special subframe with extended cyclic prefix in uplink, the total uplink duty factor in one half-frame is: $(3+0.167)/5 = 63.3\%$
- for special subframe with normal cyclic prefix in uplink, the total uplink duty factor in one half-frame is: $(3+0.143)/5 = 62.9\%$
- For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result. The scaled TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.

**<LTE Band 42 Part96 Ant 6 DSI 0>**

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				43190	43340	43490	
Frequency (MHz)				3560	3575	3590	
20	QPSK	1	0	21.35	21.41	21.39	
20	QPSK	1	49	21.39	21.32	21.27	22.5
20	QPSK	1	99	21.24	21.32	21.20	
20	QPSK	50	0	20.44	20.38	20.40	
20	QPSK	50	24	20.30	20.36	20.39	21.5
20	QPSK	50	50	20.25	20.41	20.30	
20	QPSK	100	0	20.38	20.42	20.41	
20	16QAM	1	0	20.48	20.37	20.44	21.5
20	16QAM	1	49	20.29	20.41	20.23	
20	16QAM	1	99	20.24	20.31	20.28	
20	16QAM	50	0	19.50	19.45	19.42	20.5
20	16QAM	50	24	19.38	19.39	19.24	
20	16QAM	50	50	19.34	19.41	19.25	
20	16QAM	100	0	19.31	19.35	19.35	20.5
20	64QAM	1	0	19.22	19.35	19.24	
20	64QAM	1	49	19.36	19.26	19.23	
20	64QAM	1	99	19.09	19.20	19.17	19.5
20	64QAM	50	0	18.44	18.37	18.31	
20	64QAM	50	24	18.37	18.36	18.37	
20	64QAM	50	50	18.32	18.35	18.22	17.5
20	64QAM	100	0	18.47	18.33	18.43	
20	256QAM	1	0	16.36	16.32	16.27	
20	256QAM	1	49	16.23	16.29	16.15	17.5
20	256QAM	1	99	16.23	16.28	16.20	
20	256QAM	50	0	16.23	16.17	16.19	
20	256QAM	50	24	16.36	16.21	16.21	17.5
20	256QAM	50	50	16.19	16.23	16.14	
20	256QAM	100	0	16.21	16.27	16.12	
Channel				43165	43340	43515	Tune-up limit (dBm)
Frequency (MHz)				3557.5	3575	3592.5	
15	QPSK	1	0	21.40	21.48	21.48	
15	QPSK	1	37	21.48	21.39	21.33	22.5
15	QPSK	1	74	21.34	21.42	21.25	
15	QPSK	36	0	20.53	20.46	20.45	21.5
15	QPSK	36	20	20.38	20.44	20.47	
15	QPSK	36	39	20.35	20.50	20.36	
15	QPSK	75	0	20.47	20.52	20.50	21.5
15	16QAM	1	0	20.53	20.43	20.52	
15	16QAM	1	37	20.35	20.49	20.28	
15	16QAM	1	74	20.34	20.41	20.38	20.5
15	16QAM	36	0	19.59	19.54	19.48	
15	16QAM	36	20	19.44	19.49	19.32	
15	16QAM	36	39	19.43	19.47	19.31	20.5
15	16QAM	75	0	19.38	19.41	19.45	
15	64QAM	1	0	19.30	19.45	19.29	
15	64QAM	1	37	19.42	19.34	19.32	19.5
15	64QAM	1	74	19.15	19.30	19.27	
15	64QAM	36	0	18.53	18.45	18.38	
15	64QAM	36	20	18.42	18.45	18.45	17.5
15	64QAM	36	39	18.41	18.44	18.27	
15	64QAM	75	0	18.57	18.43	18.53	
15	256QAM	1	0	16.44	16.38	16.32	17.5
15	256QAM	1	37	16.28	16.34	16.22	
15	256QAM	1	74	16.30	16.38	16.29	
15	256QAM	36	0	16.33	16.24	16.29	17.5
15	256QAM	36	20	16.41	16.31	16.26	
15	256QAM	36	39	16.27	16.32	16.19	
15	256QAM	75	0	16.26	16.33	16.20	



FCC SAR TEST REPORT

Report No. : FA510204

Channel				43140	43340	43540	Tune-up limit (dBm)
Frequency (MHz)				3555	3575	3595	
10	QPSK	1	0	21.40	21.50	21.45	22.5
10	QPSK	1	25	21.49	21.38	21.33	
10	QPSK	1	49	21.33	21.38	21.26	
10	QPSK	25	0	20.51	20.43	20.48	21.5
10	QPSK	25	12	20.37	20.43	20.45	
10	QPSK	25	25	20.30	20.51	20.35	
10	QPSK	50	0	20.46	20.48	20.51	21.5
10	16QAM	1	0	20.55	20.45	20.52	
10	16QAM	1	25	20.38	20.51	20.33	
10	16QAM	1	49	20.31	20.41	20.35	20.5
10	16QAM	25	0	19.60	19.54	19.49	
10	16QAM	25	12	19.47	19.44	19.29	
10	16QAM	25	25	19.40	19.49	19.30	20.5
10	16QAM	50	0	19.36	19.44	19.40	
10	64QAM	1	0	19.32	19.41	19.33	
10	64QAM	1	25	19.42	19.32	19.32	19.5
10	64QAM	1	49	19.18	19.28	19.25	
10	64QAM	25	0	18.50	18.43	18.36	
10	64QAM	25	12	18.44	18.45	18.43	17.5
10	64QAM	25	25	18.40	18.45	18.30	
10	64QAM	50	0	18.55	18.43	18.50	
10	256QAM	1	0	16.46	16.40	16.35	17.5
10	256QAM	1	25	16.33	16.39	16.23	
10	256QAM	1	49	16.32	16.33	16.25	
10	256QAM	25	0	16.31	16.26	16.27	17.5
10	256QAM	25	12	16.41	16.28	16.27	
10	256QAM	25	25	16.28	16.30	16.24	
10	256QAM	50	0	16.30	16.33	16.20	
Channel				43115	43340	43565	Tune-up limit (dBm)
Frequency (MHz)				3552.5	3575	3597.5	
5	QPSK	1	0	21.42	21.46	21.48	22.5
5	QPSK	1	12	21.45	21.37	21.35	
5	QPSK	1	24	21.31	21.40	21.26	
5	QPSK	12	0	20.52	20.43	20.48	21.5
5	QPSK	12	7	20.38	20.44	20.45	
5	QPSK	12	13	20.35	20.51	20.36	
5	QPSK	25	0	20.46	20.52	20.46	21.5
5	16QAM	1	0	20.54	20.44	20.54	
5	16QAM	1	12	20.37	20.47	20.33	
5	16QAM	1	24	20.32	20.41	20.35	20.5
5	16QAM	12	0	19.59	19.53	19.48	
5	16QAM	12	7	19.43	19.48	19.33	
5	16QAM	12	13	19.39	19.47	19.35	20.5
5	16QAM	25	0	19.41	19.40	19.42	
5	64QAM	1	0	19.32	19.42	19.31	
5	64QAM	1	12	19.42	19.31	19.30	19.5
5	64QAM	1	24	19.19	19.29	19.27	
5	64QAM	12	0	18.54	18.42	18.37	
5	64QAM	12	7	18.46	18.44	18.43	17.5
5	64QAM	12	13	18.41	18.42	18.29	
5	64QAM	25	0	18.55	18.43	18.51	
5	256QAM	1	0	16.41	16.39	16.37	17.5
5	256QAM	1	12	16.29	16.34	16.24	
5	256QAM	1	24	16.30	16.34	16.28	
5	256QAM	12	0	16.29	16.24	16.28	17.5
5	256QAM	12	7	16.46	16.29	16.31	
5	256QAM	12	13	16.25	16.28	16.21	
5	256QAM	25	0	16.29	16.34	16.17	

**<LTE Band 42 Part96 Ant 6 DSI 1>**

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				43190	43340	43490	
Frequency (MHz)				3560	3575	3590	
20	QPSK	1	0	21.03	21.06	21.05	21.7
20	QPSK	1	49	21.04	21.00	20.95	
20	QPSK	1	99	20.92	20.99	20.87	
20	QPSK	50	0	20.10	20.06	20.08	20.7
20	QPSK	50	24	19.98	20.04	20.03	
20	QPSK	50	50	19.93	20.04	19.95	
20	QPSK	100	0	20.05	20.05	20.05	
20	16QAM	1	0	20.16	20.01	20.09	20.7
20	16QAM	1	49	19.94	20.06	19.90	
20	16QAM	1	99	19.90	19.99	19.94	
20	16QAM	50	0	19.14	19.09	19.08	19.7
20	16QAM	50	24	19.03	19.03	18.92	
20	16QAM	50	50	18.99	19.09	18.92	
20	16QAM	100	0	18.99	19.03	19.00	
20	64QAM	1	0	18.89	18.99	18.89	19.7
20	64QAM	1	49	19.01	18.94	18.89	
20	64QAM	1	99	18.72	18.85	18.80	
20	64QAM	50	0	18.10	18.05	17.98	18.7
20	64QAM	50	24	18.02	18.01	18.05	
20	64QAM	50	50	18.00	18.02	17.90	
20	64QAM	100	0	18.10	18.00	18.06	
20	256QAM	1	0	16.00	15.95	15.91	16.7
20	256QAM	1	49	15.91	15.93	15.81	
20	256QAM	1	99	15.91	15.92	15.86	
20	256QAM	50	0	15.89	15.80	15.85	16.7
20	256QAM	50	24	16.02	15.89	15.88	
20	256QAM	50	50	15.83	15.90	15.82	
20	256QAM	100	0	15.86	15.90	15.78	
Channel				43165	43340	43515	Tune-up limit (dBm)
Frequency (MHz)				3557.5	3575	3592.5	
15	QPSK	1	0	20.86	20.95	20.86	21.7
15	QPSK	1	37	20.88	20.88	20.84	
15	QPSK	1	74	20.81	20.82	20.71	
15	QPSK	36	0	19.90	19.92	19.96	20.7
15	QPSK	36	20	19.86	19.86	19.87	
15	QPSK	36	39	19.79	19.90	19.78	
15	QPSK	75	0	19.91	19.86	19.86	
15	16QAM	1	0	20.06	19.81	19.99	20.7
15	16QAM	1	37	19.84	19.93	19.79	
15	16QAM	1	74	19.74	19.81	19.76	
15	16QAM	36	0	18.96	18.94	18.88	19.7
15	16QAM	36	20	18.84	18.89	18.74	
15	16QAM	36	39	18.89	18.90	18.74	
15	16QAM	75	0	18.89	18.86	18.87	
15	64QAM	1	0	18.73	18.89	18.73	19.7
15	64QAM	1	37	18.87	18.79	18.75	
15	64QAM	1	74	18.55	18.73	18.64	
15	64QAM	36	0	17.98	17.90	17.85	18.7
15	64QAM	36	20	17.88	17.81	17.87	
15	64QAM	36	39	17.89	17.91	17.70	
15	64QAM	75	0	17.93	17.90	17.92	
15	256QAM	1	0	15.86	15.84	15.73	16.7
15	256QAM	1	37	15.73	15.74	15.70	
15	256QAM	1	74	15.73	15.73	15.75	
15	256QAM	36	0	15.77	15.65	15.69	16.7
15	256QAM	36	20	15.86	15.79	15.75	
15	256QAM	36	39	15.66	15.74	15.62	
15	256QAM	75	0	15.68	15.75	15.58	




FCC SAR TEST REPORT

Report No. : FA510204

Channel				43140	43340	43540	Tune-up limit
Frequency (MHz)				3555	3575	3595	(dBm)
10	QPSK	1	0	20.92	20.88	20.94	21.7
10	QPSK	1	25	20.93	20.87	20.78	
10	QPSK	1	49	20.77	20.79	20.75	
10	QPSK	25	0	19.95	19.86	19.97	20.7
10	QPSK	25	12	19.87	19.90	19.87	
10	QPSK	25	25	19.81	19.85	19.77	
10	QPSK	50	0	19.89	19.91	19.93	20.7
10	16QAM	1	0	20.02	19.86	19.93	
10	16QAM	1	25	19.80	19.95	19.74	
10	16QAM	1	49	19.80	19.88	19.80	19.7
10	16QAM	25	0	19.00	18.96	18.98	
10	16QAM	25	12	18.86	18.86	18.72	
10	16QAM	25	25	18.84	18.99	18.78	19.7
10	16QAM	50	0	18.87	18.83	18.87	
10	64QAM	1	0	18.78	18.89	18.77	
10	64QAM	1	25	18.83	18.74	18.71	18.7
10	64QAM	1	49	18.62	18.65	18.66	
10	64QAM	25	0	17.96	17.86	17.83	
10	64QAM	25	12	17.84	17.86	17.95	16.7
10	64QAM	25	25	17.83	17.91	17.70	
10	64QAM	50	0	17.99	17.83	17.94	
10	256QAM	1	0	15.88	15.84	15.74	16.7
10	256QAM	1	25	15.77	15.80	15.66	
10	256QAM	1	49	15.76	15.74	15.67	
10	256QAM	25	0	15.78	15.66	15.75	16.7
10	256QAM	25	12	15.86	15.78	15.76	
10	256QAM	25	25	15.69	15.73	15.64	
10	256QAM	50	0	15.73	15.73	15.65	
Channel				43115	43340	43565	Tune-up limit
Frequency (MHz)				3552.5	3575	3597.5	(dBm)
5	QPSK	1	0	20.93	20.89	20.91	21.7
5	QPSK	1	12	20.88	20.85	20.75	
5	QPSK	1	24	20.79	20.87	20.73	
5	QPSK	12	0	19.99	19.86	19.93	20.7
5	QPSK	12	7	19.80	19.91	19.83	
5	QPSK	12	13	19.79	19.91	19.85	
5	QPSK	25	0	19.89	19.90	19.85	20.7
5	16QAM	1	0	19.97	19.84	19.89	
5	16QAM	1	12	19.79	19.89	19.75	
5	16QAM	1	24	19.76	19.82	19.84	19.7
5	16QAM	12	0	18.94	18.89	18.94	
5	16QAM	12	7	18.86	18.83	18.78	
5	16QAM	12	13	18.88	18.98	18.80	19.7
5	16QAM	25	0	18.84	18.92	18.87	
5	64QAM	1	0	18.75	18.87	18.79	
5	64QAM	1	12	18.88	18.81	18.69	18.7
5	64QAM	1	24	18.57	18.70	18.68	
5	64QAM	12	0	17.98	17.94	17.80	
5	64QAM	12	7	17.82	17.83	17.87	16.7
5	64QAM	12	13	17.80	17.84	17.71	
5	64QAM	25	0	17.93	17.81	17.87	
5	256QAM	1	0	15.82	15.77	15.78	16.7
5	256QAM	1	12	15.75	15.74	15.70	
5	256QAM	1	24	15.74	15.76	15.69	
5	256QAM	12	0	15.73	15.66	15.68	16.7
5	256QAM	12	7	15.83	15.70	15.77	
5	256QAM	12	13	15.70	15.70	15.67	
5	256QAM	25	0	15.66	15.78	15.58	

13. Antenna Location

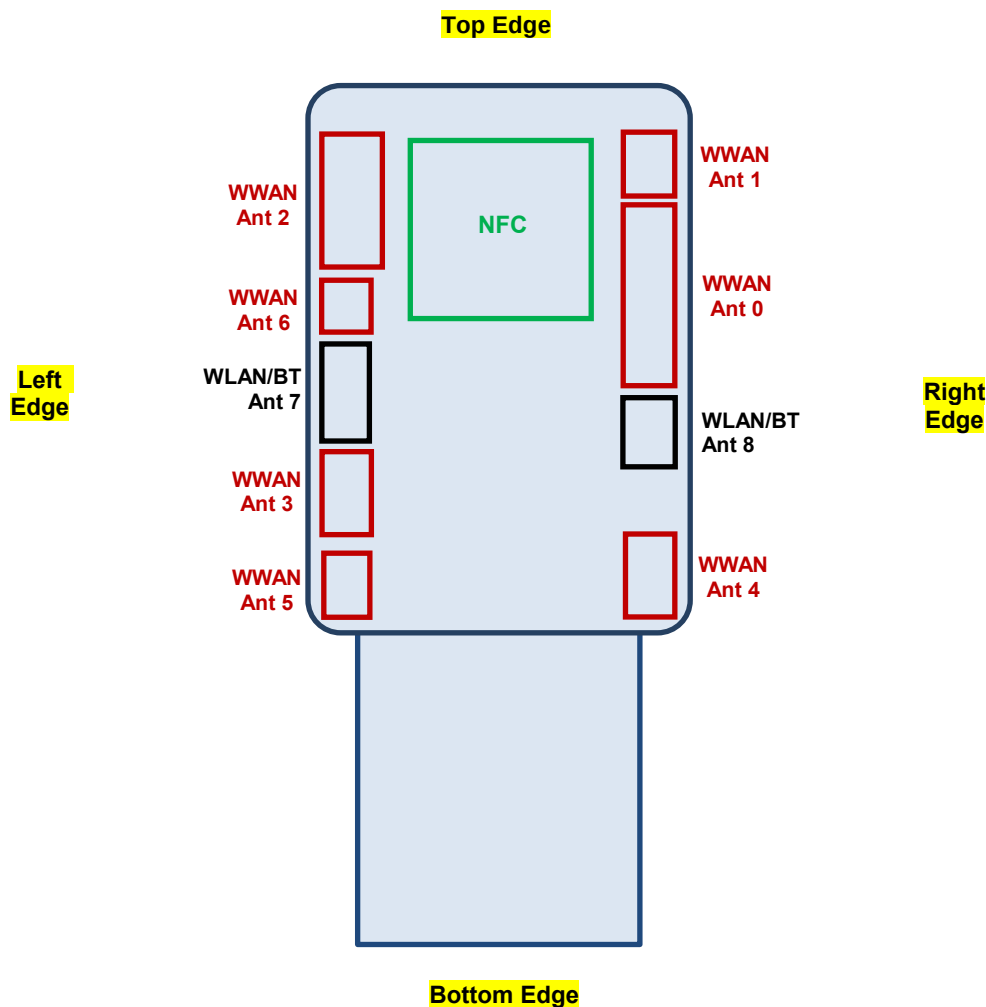

Front View

Distance of the Antenna to the EUT surface/edge						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Ant 6	≤ 25mm	≤ 25mm	> 25mm	> 25mm	> 25mm	≤ 25mm

Positions for SAR tests; Hotspot mode						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Ant 6	Yes	Yes	No	No	No	Yes

General Note:

- Referring to KDB 941225 D06 v02r01, when the overall device length and width are $\geq 9\text{cm} \times 5\text{cm}$, the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge.

14. SAR Test Results

General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result. The Reported TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.

LTE Note:

1. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is $> \text{not } \frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
5. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is $> \text{not } \frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.

**14.1 Hotspot SAR****<LTE SAR>**

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Scanner	Power State	Keypad	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 42_Ant 6	20M	QPSK	1	0	Front	10mm	S0803FR	DSI 1	AlphaNumeric	43340	3575	21.06	21.70	1.159	62.9	1.006	0.13	0.192	0.224
	LTE Band 42_Ant 6	20M	QPSK	50	0	Front	10mm	S0803FR	DSI 1	AlphaNumeric	43340	3575	20.06	20.70	1.159	62.9	1.006	0.12	0.157	0.183
	LTE Band 42_Ant 6	20M	QPSK	1	0	Back	10mm	S0803FR	DSI 1	AlphaNumeric	43340	3575	21.06	21.70	1.159	62.9	1.006	0.03	0.077	0.090
	LTE Band 42_Ant 6	20M	QPSK	50	0	Back	10mm	S0803FR	DSI 1	AlphaNumeric	43340	3575	20.06	20.70	1.159	62.9	1.006	0.18	0.063	0.073
01	LTE Band 42_Ant 6	20M	QPSK	1	0	Left Edge	10mm	S0803FR	DSI 1	AlphaNumeric	43340	3575	21.06	21.70	1.159	62.9	1.006	-0.06	0.366	0.427
	LTE Band 42_Ant 6	20M	QPSK	50	0	Left Edge	10mm	S0803FR	DSI 1	AlphaNumeric	43340	3575	20.06	20.70	1.159	62.9	1.006	0.16	0.319	0.372
	LTE Band 42_Ant 6	20M	QPSK	1	0	Left Edge	10mm	S0703	DSI 1	AlphaNumeric	43340	3575	21.06	21.70	1.159	62.9	1.006	-0.1	0.308	0.359
	LTE Band 42_Ant 6	20M	QPSK	1	0	Left Edge	10mm	S0803	DSI 1	AlphaNumeric	43340	3575	21.06	21.70	1.159	62.9	1.006	0.07	0.320	0.373
	LTE Band 42_Ant 6	20M	QPSK	1	0	Left Edge	10mm	S0803FR	DSI 1	Numeric	43340	3575	21.06	21.70	1.159	62.9	1.006	0.18	0.314	0.366
	LTE Band 42_Ant 6	20M	QPSK	1	0	Left Edge	10mm	S0803FR	DSI 1	Large Numeric	43340	3575	21.06	21.70	1.159	62.9	1.006	-0.1	0.320	0.373
	LTE Band 42_Ant 6	20M	QPSK	1	0	Left Edge	10mm	S0803FR	DSI 1	53keys	43340	3575	21.06	21.70	1.159	62.9	1.006	0.01	0.347	0.405
	LTE Band 42_Ant 6	20M	QPSK	1	0	Left Edge	10mm	S0803FR	DSI 1	42keys	43340	3575	21.06	21.70	1.159	62.9	1.006	-0.15	0.312	0.364

14.2 Body Worn Accessory SAR**<LTE SAR>**

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Scanner	Power State	Keypad	Ch.	Freq. (MHz)	Holster	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 42_Ant 6	20M	QPSK	1	0	Front	15mm	S0803FR	DSI 0	AlphaNumeric	43340	3575	-	21.41	22.50	1.285	62.9	1.006	0.07	0.152	0.197
	LTE Band 42_Ant 6	20M	QPSK	50	0	Front	15mm	S0803FR	DSI 0	AlphaNumeric	43340	3575	-	20.38	21.50	1.294	62.9	1.006	-0.18	0.121	0.158
	LTE Band 42_Ant 6	20M	QPSK	1	0	Back	15mm	S0803FR	DSI 0	AlphaNumeric	43340	3575	-	21.41	22.50	1.285	62.9	1.006	0.03	0.055	0.071
	LTE Band 42_Ant 6	20M	QPSK	50	0	Back	15mm	S0803FR	DSI 0	AlphaNumeric	43340	3575	-	20.38	21.50	1.294	62.9	1.006	-0.15	0.078	0.102
	LTE Band 42_Ant 6	20M	QPSK	1	0	Front	15mm	S0703	DSI 0	AlphaNumeric	43340	3575	-	21.41	22.50	1.285	62.9	1.006	-0.15	0.140	0.181
	LTE Band 42_Ant 6	20M	QPSK	1	0	Front	15mm	S0803	DSI 0	AlphaNumeric	43340	3575	-	21.41	22.50	1.285	62.9	1.006	0.11	0.142	0.184
	LTE Band 42_Ant 6	20M	QPSK	1	0	Front	15mm	S0803FR	DSI 0	Numeric	43340	3575	-	21.41	22.50	1.285	62.9	1.006	-0.08	0.141	0.182
	LTE Band 42_Ant 6	20M	QPSK	1	0	Front	15mm	S0803FR	DSI 0	Large Numeric	43340	3575	-	21.41	22.50	1.285	62.9	1.006	-0.17	0.142	0.184
	LTE Band 42_Ant 6	20M	QPSK	1	0	Front	15mm	S0803FR	DSI 0	53keys	43340	3575	-	21.41	22.50	1.285	62.9	1.006	-0.08	0.148	0.191
	LTE Band 42_Ant 6	20M	QPSK	1	0	Front	15mm	S0803FR	DSI 0	42keys	43340	3575	-	21.41	22.50	1.285	62.9	1.006	-0.04	0.140	0.181
	LTE Band 42_Ant 6	20M	QPSK	1	0	Front	0mm	S0803FR	DSI 0	AlphaNumeric	43340	3575	Holster 1	21.41	22.50	1.285	62.9	1.006	-0.08	0.124	0.160
02	LTE Band 42_Ant 6	20M	QPSK	1	0	Left Edge	0mm	S0803FR	DSI 0	AlphaNumeric	43340	3575	Holster 2	21.41	22.50	1.285	62.9	1.006	0.17	0.261	0.337

**14.3 Product Specific SAR****<LTE SAR>**

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Scanner	Power State	Keypad	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	LTE Band 42_Ant 6	20M	QPSK	1	0	Front	0mm	S0803FR	DSI 0	AlphaNumeric	43340	3575	21.41	22.50	1.285	62.9	1.006	0.08	0.325	0.420
	LTE Band 42_Ant 6	20M	QPSK	50	0	Front	0mm	S0803FR	DSI 0	AlphaNumeric	43340	3575	20.38	21.50	1.294	62.9	1.006	0.01	0.257	0.335
	LTE Band 42_Ant 6	20M	QPSK	1	0	Back	0mm	S0803FR	DSI 0	AlphaNumeric	43340	3575	21.41	22.50	1.285	62.9	1.006	0.03	0.097	0.125
	LTE Band 42_Ant 6	20M	QPSK	50	0	Back	0mm	S0803FR	DSI 0	AlphaNumeric	43340	3575	20.38	21.50	1.294	62.9	1.006	-0.08	0.068	0.089
	LTE Band 42_Ant 6	20M	QPSK	1	0	Top Edge	0mm	S0803FR	DSI 0	AlphaNumeric	43340	3575	21.41	22.50	1.285	62.9	1.006	-0.08	0.086	0.111
	LTE Band 42_Ant 6	20M	QPSK	50	0	Top Edge	0mm	S0803FR	DSI 0	AlphaNumeric	43340	3575	20.38	21.50	1.294	62.9	1.006	0.1	0.068	0.089
	LTE Band 42_Ant 6	20M	QPSK	1	0	Right Edge	0mm	S0803FR	DSI 0	AlphaNumeric	43340	3575	21.41	22.50	1.285	62.9	1.006	-0.18	0.051	0.066
	LTE Band 42_Ant 6	20M	QPSK	50	0	Right Edge	0mm	S0803FR	DSI 0	AlphaNumeric	43340	3575	20.38	21.50	1.294	62.9	1.006	0.1	0.056	0.073
	LTE Band 42_Ant 6	20M	QPSK	1	0	Bottom Edge	0mm	S0803FR	DSI 0	AlphaNumeric	43340	3575	21.41	22.50	1.285	62.9	1.006	0.12	0.001	0.001
	LTE Band 42_Ant 6	20M	QPSK	50	0	Bottom Edge	0mm	S0803FR	DSI 0	AlphaNumeric	43340	3575	20.38	21.50	1.294	62.9	1.006	0.08	0.001	0.001
03	LTE Band 42_Ant 6	20M	QPSK	1	0	Left Edge	0mm	S0803FR	DSI 0	AlphaNumeric	43340	3575	21.41	22.50	1.285	62.9	1.006	-0.17	0.417	0.539
	LTE Band 42_Ant 6	20M	QPSK	50	0	Left Edge	0mm	S0803FR	DSI 0	AlphaNumeric	43340	3575	20.38	21.50	1.294	62.9	1.006	-0.03	0.401	0.522
	LTE Band 42_Ant 6	20M	QPSK	1	0	Left Edge	0mm	S0703	DSI 0	AlphaNumeric	43340	3575	21.41	22.50	1.285	62.9	1.006	0.14	0.359	0.464
	LTE Band 42_Ant 6	20M	QPSK	1	0	Left Edge	0mm	S0803	DSI 0	AlphaNumeric	43340	3575	21.41	22.50	1.285	62.9	1.006	0.11	0.373	0.482
	LTE Band 42_Ant 6	20M	QPSK	1	0	Left Edge	0mm	S0803FR	DSI 0	Numeric	43340	3575	21.41	22.50	1.285	62.9	1.006	-0.05	0.366	0.473
	LTE Band 42_Ant 6	20M	QPSK	1	0	Left Edge	0mm	S0803FR	DSI 0	Large Numeric	43340	3575	21.41	22.50	1.285	62.9	1.006	0.18	0.373	0.482
	LTE Band 42_Ant 6	20M	QPSK	1	0	Left Edge	0mm	S0803FR	DSI 0	53keys	43340	3575	21.41	22.50	1.285	62.9	1.006	0.14	0.405	0.524
	LTE Band 42_Ant 6	20M	QPSK	1	0	Left Edge	0mm	S0803FR	DSI 0	42keys	43340	3575	21.41	22.50	1.285	62.9	1.006	-0.17	0.363	0.469

Test Engineer : Andy Chiang

15. Uncertainty Assessment

Declaration of Conformity:

The test results with all measurement uncertainty excluded is presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience, and knowledge of the behavior and properties of relevant materials and instruments, manufacture's specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in table below.

Uncertainty Distributions	Normal	Rectangular	Triangular	U-Shape
Multi-plying Factor ^(a)	$1/k^{(b)}$	$1/\sqrt{3}$	$1/\sqrt{6}$	$1/\sqrt{2}$

(a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity

(b) k is the coverage factor

Standard Uncertainty for Assumed Distribution

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual "root-sum-squares" (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is shown in the following tables.

The judgment of conformity in the report is based on the measurement results excluding the measurement uncertainty.

Applicable for SAR Measurements:

Uncertainty Budget (4 MHz - 10 GHz range)							
Error Description	Uncertainty Value (±%)	Probability	Divisor	(Ci) 1g	(Ci) 10g	Standard Uncertainty (1g) (±%)	Standard Uncertainty (10g) (±%)
Measurement System							
Probe Calibration	18.60	N	2	1	1	9.3	9.3
Axial Isotropy	4.70	R	1.732	0.7	0.7	1.9	1.9
Hemispherical Isotropy	9.60	R	1.732	0.7	0.7	3.9	3.9
Linearity	4.70	R	1.732	1	1	2.7	2.7
Modulation Response	4.68	R	1.732	1	1	2.7	2.7
System Detection Limits	1.00	R	1.732	1	1	0.6	0.6
Boundary Effects	2.00	R	1.732	1	1	1.2	1.2
Readout Electronics	0.30	N	1	1	1	0.3	0.3
Response Time	0.00	R	1.732	1	1	0.0	0.0
Integration Time	2.60	R	1.732	1	1	1.5	1.5
RF Ambient Noise	3.00	R	1.732	1	1	1.7	1.7
RF Ambient Reflections	3.00	R	1.732	1	1	1.7	1.7
Probe Positioner	0.40	R	1.732	1	1	0.2	0.2
Probe Positioning	6.70	R	1.732	1	1	3.9	3.9
Post-processing	4.00	R	1.732	1	1	2.3	2.3
Test Sample Related							
Device Holder	3.60	N	1	1	1	3.6	3.6
Test sample Positioning	3.03	N	1	1	1	3.0	3.0
Power Scaling	0.00	R	1.732	1	1	0.0	0.0
Power Drift	5.00	R	1.732	1	1	2.9	2.9
Phantom and Setup							
Phantom Uncertainty	7.60	R	1.732	1	1	4.4	4.4
SAR correction	0.00	R	1.732	1	0.84	0.0	0.0
Liquid Conductivity Repeatability	0.03	N	1	0.78	0.77	0.0	0.0
Liquid Conductivity (target)	5.00	R	1.732	0.78	0.77	2.3	2.2
Liquid Conductivity (mea.)	2.50	R	1.732	0.78	0.77	1.1	1.1
Temp. unc. - Conductivity	3.68	R	1.732	0.78	0.77	1.7	1.6
Liquid Permittivity Repeatability	0.02	N	1	0.23	0.26	0.0	0.0
Liquid Permittivity (target)	5.00	R	1.732	0.23	0.26	0.7	0.8
Liquid Permittivity (mea.)	2.50	R	1.732	0.23	0.26	0.3	0.4
Temp. unc. - Permittivity	0.84	R	1.732	0.23	0.26	0.1	0.1
Combined Std. Uncertainty						14.5%	14.2%
Coverage Factor for 95 %						K=2	K=2
Expanded STD Uncertainty						29.0%	28.4%

16. References

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] FCC KDB 248227 D01 v02r02, "SAR Guidance for IEEE 802.11 (WiFi) Transmitters", Oct 2015.
- [5] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015
- [6] FCC KDB 941225 D01 v03r01, "3G SAR MEAUREMENT PROCEDURES", Oct 2015
- [7] FCC KDB 941225 D05 v02r05, "SAR Evaluation Considerations for LTE Devices", Dec 2015
- [8] FCC KDB 941225 D05A v01r02, "Rel. 10 LTE SAR Test Guidance and KDB Inquiries", Oct 2015
- [9] FCC KDB 941225 D06 v02r01, "SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities", Oct 2015.
- [10] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [11] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.
- [12] IEC/IEEE 62209-1528:2020, "Measurement procedure for the assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Part 1528: Human models, instrumentation, and procedures (Frequency range of 4 MHz to 10 GHz)", Oct. 2020
- [13] SPEAG DASY6 System Handbook
- [14] SPEAG DASY6 Application Note (Interim Procedure for Device Operation at 6GHz-10GHz)