

FCC RF Test Report


APPLICANT : Honeywell International Inc.
EQUIPMENT : CK75LAN mobile computer
BRAND NAME : Honeywell
MODEL NAME : CK75LAN
MARKETING NAME : CK75
FCC ID : HD5-CK75LAN
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DSS) Spread Spectrum Transmitter

The product was received on Dec. 28, 2016 and testing was completed on Feb. 02, 2017. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.



Reviewed by: Joseph Lin / Supervisor



Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test	5
1.4 Product Specification of Equipment Under Test	6
1.5 Modification of EUT	6
1.6 Testing Location	7
1.7 Applicable Standards	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
2.1 Descriptions of Test Mode	8
2.2 Test Mode	9
2.3 Connection Diagram of Test System	10
2.4 Support Unit used in test configuration and system	11
2.5 EUT Operation Test Setup	11
2.6 Measurement Results Explanation Example	12
3 TEST RESULT	13
3.1 Number of Channel Measurement	13
3.2 Hopping Channel Separation Measurement	15
3.3 Dwell Time Measurement	22
3.4 20dB and 99% Bandwidth Measurement	24
3.5 Peak Output Power Measurement	37
3.6 Conducted Band Edges Measurement	39
3.7 Conducted Spurious Emission Measurement	46
3.8 Radiated Band Edges and Spurious Emission Measurement	56
3.9 AC Conducted Emission Measurement	62
3.10 Antenna Requirements	68
4 LIST OF MEASURING EQUIPMENT	69
5 UNCERTAINTY OF EVALUATION	70
APPENDIX A. RADIATED SPURIOUS EMISSION	
APPENDIX B. RADIATED SPURIOUS EMISSION PLOTS	
APPENDIX C. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR6D2819-02A	Rev. 01	Initial issue of report	Mar. 08, 2017
FR6D2819-02A	Rev. 02	Revising battery information	Mar. 16, 2017

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(1)	Number of Channels	$\geq 15\text{Chs}$	Pass	-
3.2	15.247(a)(1)	Hopping Channel Separation	$\geq 2/3$ of 20dB BW	Pass	-
3.3	15.247(a)(1)	Dwell Time of Each Channel	$\leq 0.4\text{sec}$ in 31.6sec period	Pass	-
3.4	15.247(a)(1)	20dB Bandwidth	NA	Pass	-
3.4	-	99% Bandwidth	-	Pass	-
3.5	15.247(b)(1)	Peak Output Power	$\leq 125\text{ mW}$	Pass	-
3.6	15.247(d)	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
3.7	15.247(d)	Conducted Spurious Emission	$\leq 20\text{dBc}$	Pass	-
3.8	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 3.44 dB at 30.810 MHz
3.9	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 7.20 dB at 0.510 MHz
3.10	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-



1 General Description

1.1 Applicant

Honeywell International Inc.

9680 Old Bailes Road, Fort Mill, SC 29707 USA

1.2 Manufacturer

Honeywell International Inc.

9680 Old Bailes Road, Fort Mill, SC 29707 USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	CK75LAN mobile computer
Brand Name	Honeywell
Model Name	CK75LAN
Marketing Name	CK75
FCC ID	HD5-CK75LAN
Sample 1	CK75 A6-N5603 A6 keypad_N5603 imager
Sample 2	CK75 B6-N5603 B6 keypad_N5603 imager
Sample 3	CK75 A6-EX25 A6 keypad_EX25 imager
Sample 4	CK75 B6-EX25 B6 keypad_EX25 imager
EUT supports Radios application	WLAN 11a/b/g/n HT20 Bluetooth BR/EDR/LE
HW Version	v1.1
SW Version	3.00.05.0075
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	79
Carrier Frequency of Each Channel	2402+n*1 MHz; n=0~78
Maximum Output Power to Antenna	Bluetooth BR(1Mbps) : 6.33 dBm (0.0043 W) Bluetooth EDR (2Mbps) : 7.45 dBm (0.0056 W) Bluetooth EDR (3Mbps) : 7.97 dBm (0.0063 W)
99% Occupied Bandwidth	Bluetooth BR(1Mbps) : 0.828MHz Bluetooth EDR (2Mbps) : 1.192MHz Bluetooth EDR (3Mbps) : 1.172MHz
Antenna Type / Gain	PIFA Antenna type with gain 2.29 dBi
Type of Modulation	Bluetooth BR (1Mbps) : GFSK Bluetooth EDR (2Mbps) : $\pi/4$ -DQPSK Bluetooth EDR (3Mbps) : 8-DPSK

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1022 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Test Site	SPORTON INTERNATIONAL INC.	
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978	
Test Site No.	Sporton Site No.	
	TH05-HY	CO05-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	SPORTON INTERNATIONAL INC.	
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd Rd. Guishan Dist, Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855	
Test Site No.	Sporton Site No.	
	03CH11-HY	

Note: The test site complies with ANSI C63.4 2014 requirement.

1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

2.1 Descriptions of Test Mode

Preliminary tests were performed in different data rates and recorded the RF output power in the following table:

Channel	Frequency	Bluetooth RF Output Power		
		Data Rate / Modulation		
		GFSK	$\pi/4$ -DQPSK	8-DPSK
		1Mbps	2Mbps	3Mbps
Ch00	2402MHz	6.31 dBm	7.36 dBm	7.85 dBm
Ch39	2441MHz	6.33 dBm	7.45 dBm	7.96 dBm
Ch78	2480MHz	6.21 dBm	7.44 dBm	7.97 dBm

Remark:

1. All the test data for each data rate were verified, but only the worst case was reported.
 2. The data rate was set in 3Mbps for all the test items due to the highest RF output power.
- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction (150 kHz to 30 MHz), radiation (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). Pre-scanned tests, X, Y, Z in three orthogonal panels, and different data rates were conducted to determine the final configuration (Y plane as worst plane) from all possible combinations, and the worst mode of radiated spurious emissions is Bluetooth 3Mbps mode, and recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

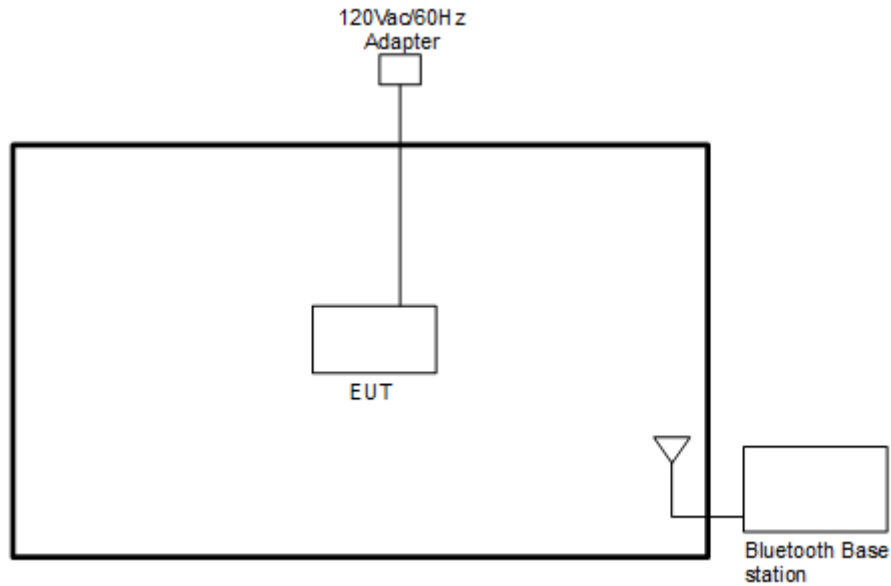
2.2 Test Mode

The following summary table is showing all test modes to demonstrate in compliance with the standard.

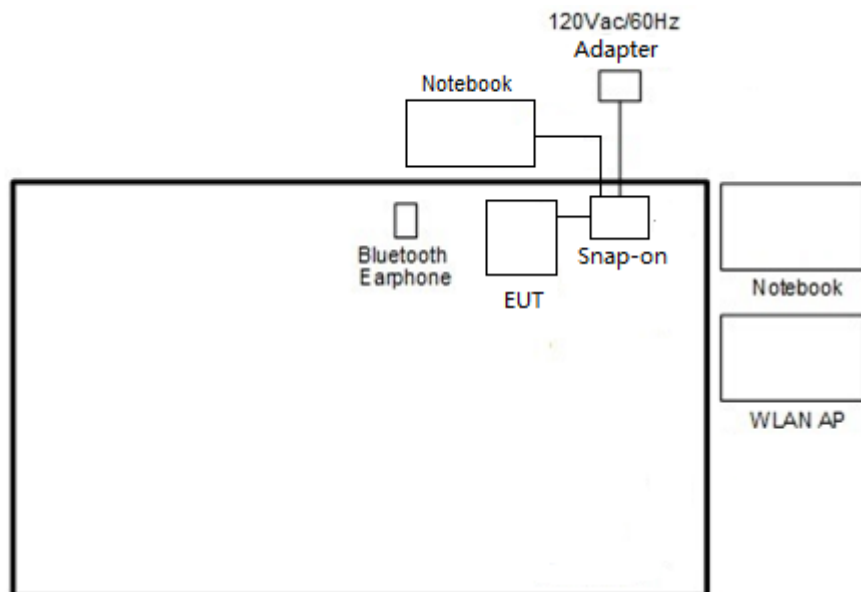
Summary table of Test Cases			
Test Item	Data Rate / Modulation		
	Bluetooth BR 1Mbps GFSK	Bluetooth EDR 2Mbps $\pi/4$ -DQPSK	Bluetooth EDR 3Mbps 8-DPSK
Conducted Test Cases	Mode 1: CH00_2402 MHz	Mode 4: CH00_2402 MHz	Mode 7: CH00_2402 MHz
	Mode 2: CH39_2441 MHz	Mode 5: CH39_2441 MHz	Mode 8: CH39_2441 MHz
	Mode 3: CH78_2480 MHz	Mode 6: CH78_2480 MHz	Mode 9: CH78_2480 MHz
Radiated Test Cases	Bluetooth EDR 3Mbps 8-DPSK		
	Mode 1: CH00_2402 MHz		
	Mode 2: CH39_2441 MHz		
	Mode 3: CH78_2480 MHz		
AC Conducted Emission	Mode 1 :Bluetooth Link + WLAN (2.4GHz) Link + Scanner + MPEG4 + Snap-on 1 + RJ-45 Cable Link with Notebook + Adapter + SD Card for Sample 4		
Remark:			
1. For radiated test cases, the worst mode data rate 3Mbps was reported only, because this data rate has the highest RF output power at preliminary tests, and the conducted spurious emissions and conducted band edge measurement for each data rate are no worse than 3Mbps, and no other significantly frequencies found in conducted spurious emission.			
2. Snap-on 1: Ethernet Snap-On 1000AA01			
3. Adapter: Level V (for Snap-on)			
4. All the radiated test cases were performance with Sample 3.			

2.3 Connection Diagram of Test System

<Bluetooth Tx Mode>



<AC Conducted Emission Mode>





2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Bluetooth Base Station	R&S	CBT32	N/A	N/A	Unshielded, 1.8 m
2.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded, 1.8m
3.	Notebook	DELL	Latitude E6320	FCC DoC/ Contains FCC ID: QDS-BRCM1054	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
4.	Bluetooth Earphone	Sony Ericsson	MW600	PY7DDA-2029	N/A	N/A
5.	SD Card	SanDisk	MicroSD HC	FCC DoC	N/A	N/A
6.	CN75A/CN75E Vehicle dock	intermec technologies corp	1000AV01	FCC DoC	NA	NA
7.	CK75 Vehicle dock	intermec technologies corp	1001AV01	FCC DoC	NA	NA
8.	car charger	intermec technologies corp	852-057-005	Verification	NA	Unshielded, 1.2m
9.	Snap-on(LAN)	intermec technologies corp	1000AA01	FCC DoC	NA	NA
10.	Snap-on(RS232)	intermec technologies corp	1000AA03	FCC DoC	NA	NA
11.	Snap-On (VoCollect)	intermec technologies corp	1000AA05	FCC DoC	NA	NA
12.	Snap-on (USB)	intermec technologies corp	1000AA07	FCC DoC	NA	NA
13.	Snap-on adapter	intermec technologies corp	9001AE01	FCC DoC	NA	AC IP: Unshielded, 1.8m DC OP: Shielded, 1.8m
14.	Earphone	Honeywell	Voccollect SR-20	FCC DoC	1.1 meter, shielded cable	NA
15.	USB Cable	intermec technologies corp	VE011-2018	FCC DoC	NA	1.4 meter, shielded cable, w/t ferrite core
16.	Battery	intermec technologies corp	1001AB01	NA	NA	NA

2.5 EUT Operation Test Setup

For Bluetooth function, the RF utility, "rtt-adv-usr v21" was installed in EUT which was programmed in order to make the EUT get into the engineering modes to contact with Bluetooth base station for continuous transmitting and receiving signals.



2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 Number of Channel Measurement

3.1.1 Limits of Number of Hopping Frequency

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

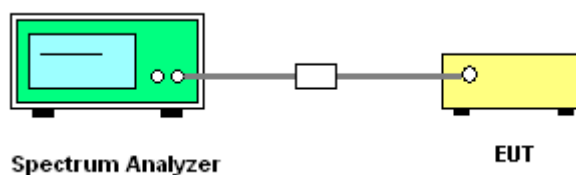
3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 7.8.3.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = the frequency band of operation;
RBW = 300kHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. The number of hopping frequency used is defined as the number of total channel.
7. Record the measurement data derived from spectrum analyzer.

3.1.4 Test Setup

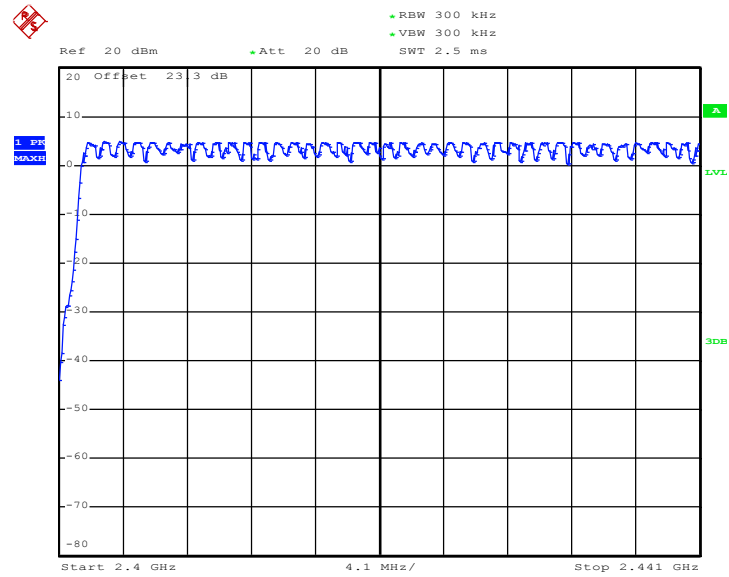


3.1.5 Test Result of Number of Hopping Frequency

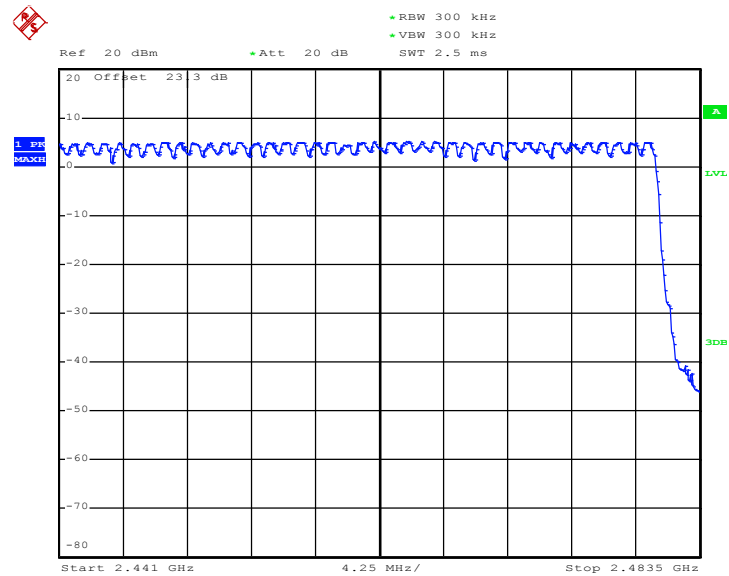
Test Mode :	3Mbps	Temperature :	24~26°C
Test Engineer :	Aking Chang	Relative Humidity :	48~51%
Number of Hopping (Channel)	Adaptive Frequency Hopping (Channel)	Limits (Channel)	Pass/Fail
79	20	> 15	Pass



Number of Hopping Channel Plot on Channel 00 - 78



Date: 26.JAN.2017 23:00:18



Date: 26.JAN.2017 23:01:34

3.2 Hopping Channel Separation Measurement

3.2.1 Limit of Hopping Channel Separation

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

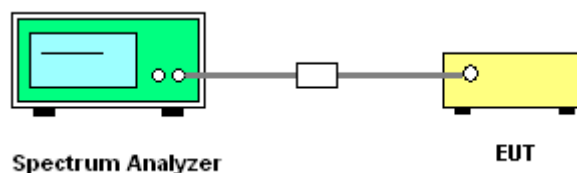
3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.2.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings:
Span = wide enough to capture the peaks of two adjacent channels;
RBW = 300kHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

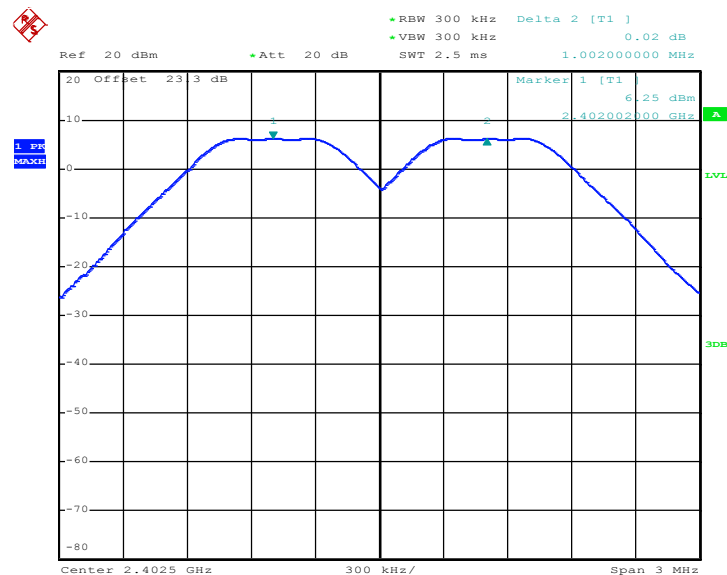
3.2.4 Test Setup



**3.2.5 Test Result of Hopping Channel Separation**

Test Mode :	1Mbps	Temperature :	24~26°C
Test Engineer :	Aking Chang	Relative Humidity :	48~51%

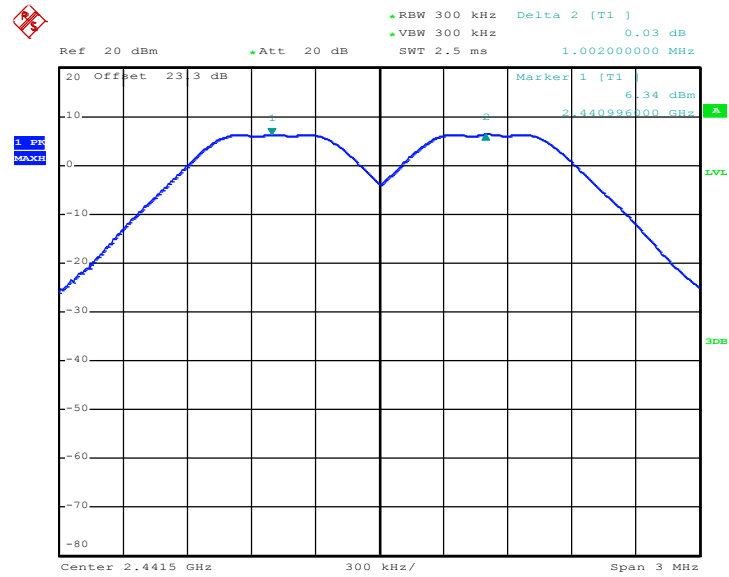
Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.002	0.6000	Pass
39	2441	1.002	0.6000	Pass
78	2480	1.002	0.6160	Pass

Channel Separation Plot on Channel 00 - 01

Date: 26.JAN.2017 23:08:25

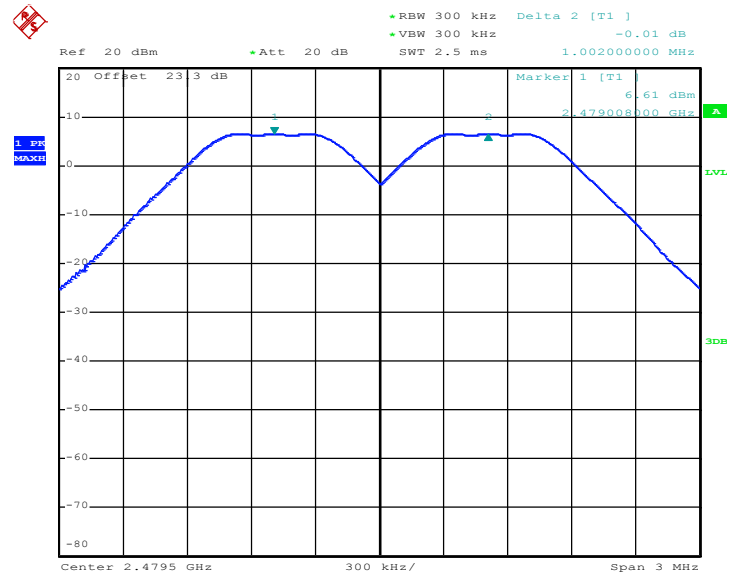


Channel Separation Plot on Channel 39 - 40



Date: 26.JAN.2017 23:12:14

Channel Separation Plot on Channel 77 - 78

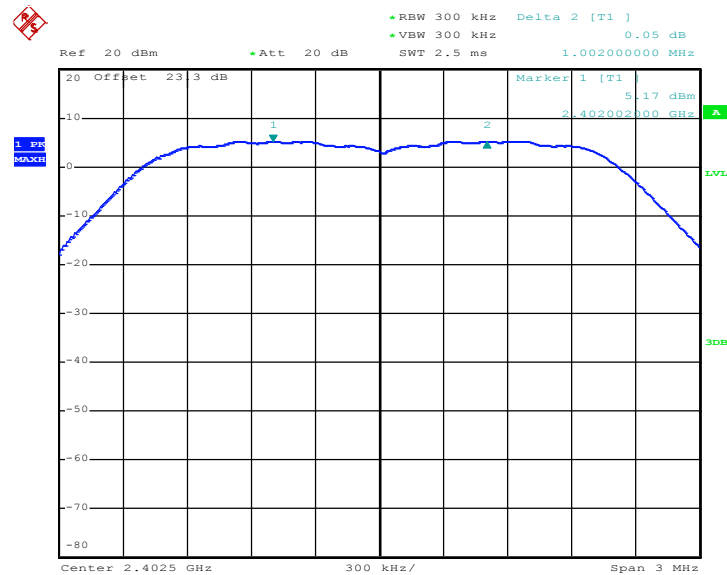


Date: 26.JAN.2017 23:16:02



Test Mode :	2Mbps	Temperature :	24~26°C
Test Engineer :	Aking Chang	Relative Humidity :	48~51%

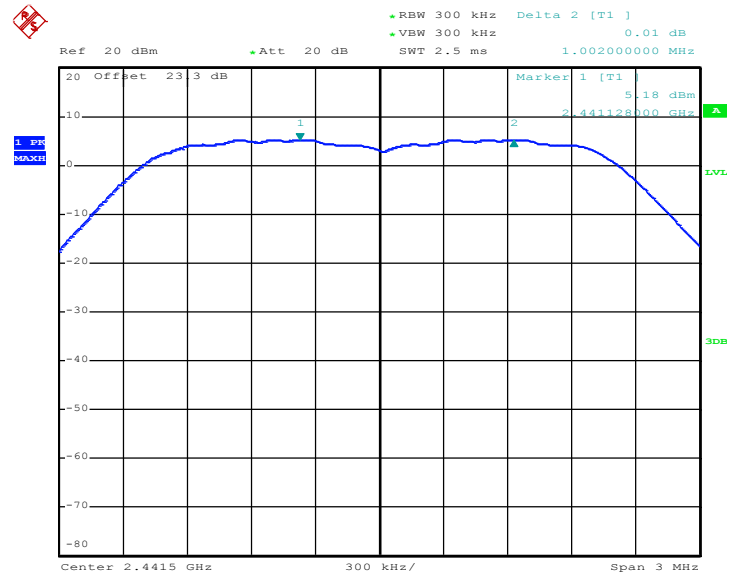
Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.002	0.8800	Pass
39	2441	1.002	0.8920	Pass
78	2480	1.002	0.8800	Pass

Channel Separation Plot on Channel 00 - 01

Date: 26.JAN.2017 23:20:20

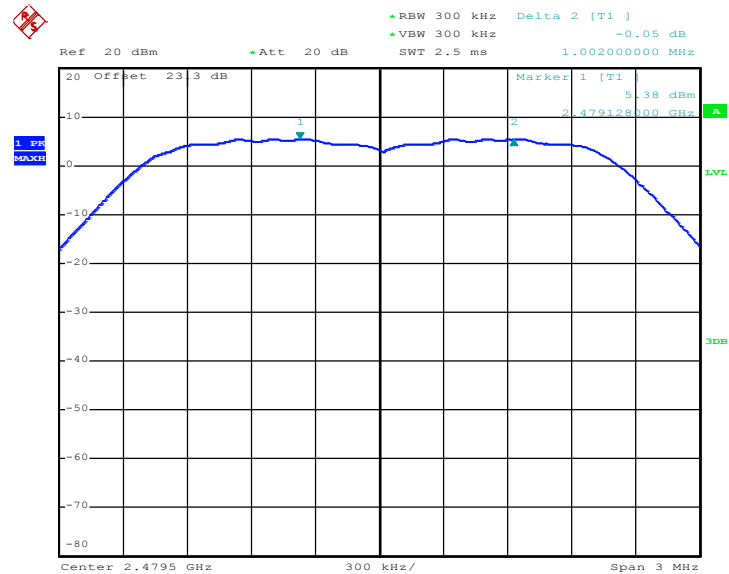


Channel Separation Plot on Channel 39 - 40



Date: 26.JAN.2017 23:24:00

Channel Separation Plot on Channel 77 - 78

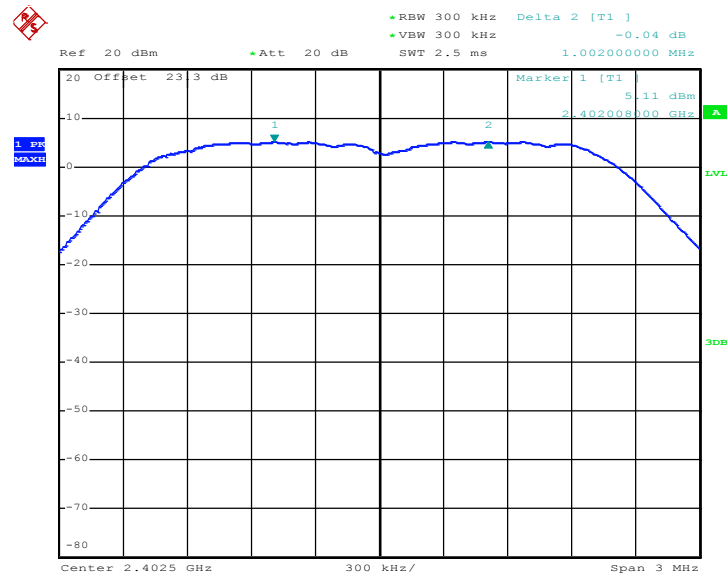


Date: 26.JAN.2017 23:28:00



Test Mode :	3Mbps	Temperature :	24~26°C
Test Engineer :	Aking Chang	Relative Humidity :	48~51%

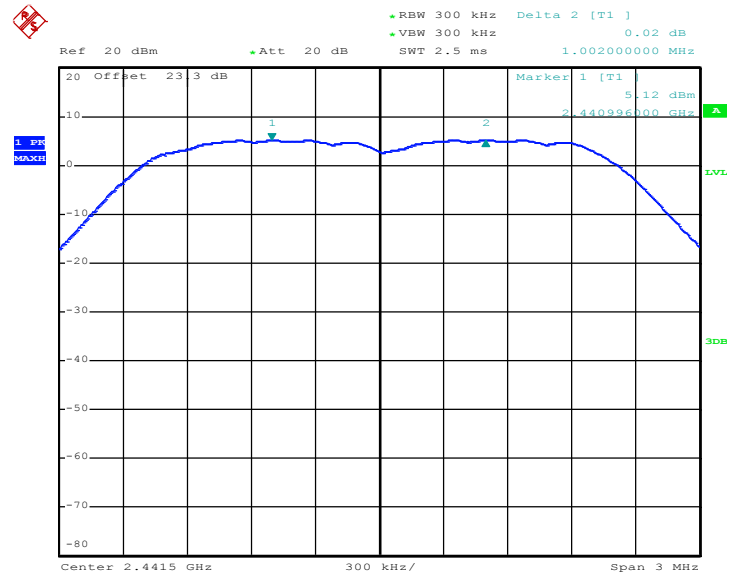
Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.002	0.8480	Pass
39	2441	1.002	0.8520	Pass
78	2480	1.002	0.8520	Pass

Channel Separation Plot on Channel 00 - 01

Date: 26.JAN.2017 23:34:01

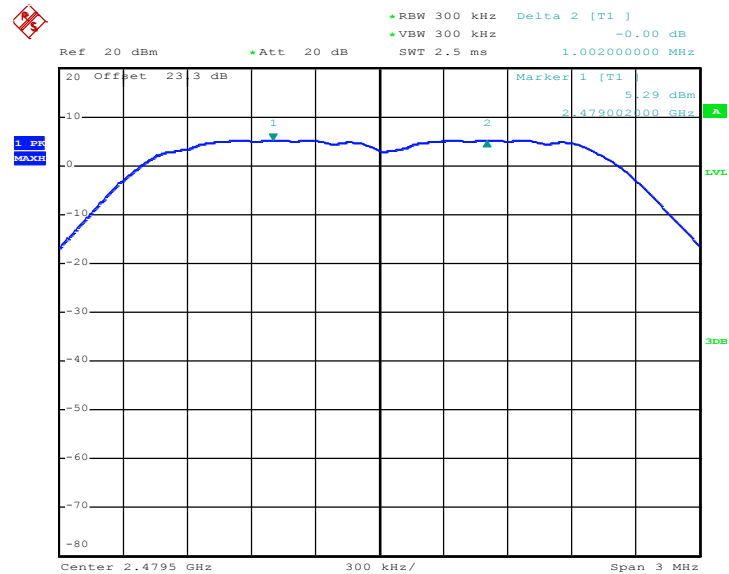


Channel Separation Plot on Channel 39 - 40



Date: 26.JAN.2017 23:41:22

Channel Separation Plot on Channel 77 - 78



Date: 26.JAN.2017 23:49:51

3.3 Dwell Time Measurement

3.3.1 Limit of Dwell Time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

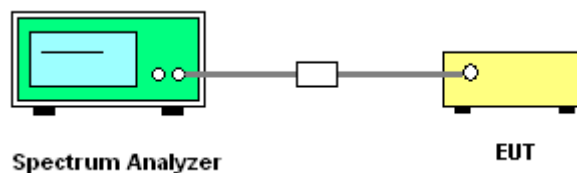
3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.4.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW $\geq$ RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

3.3.4 Test Setup



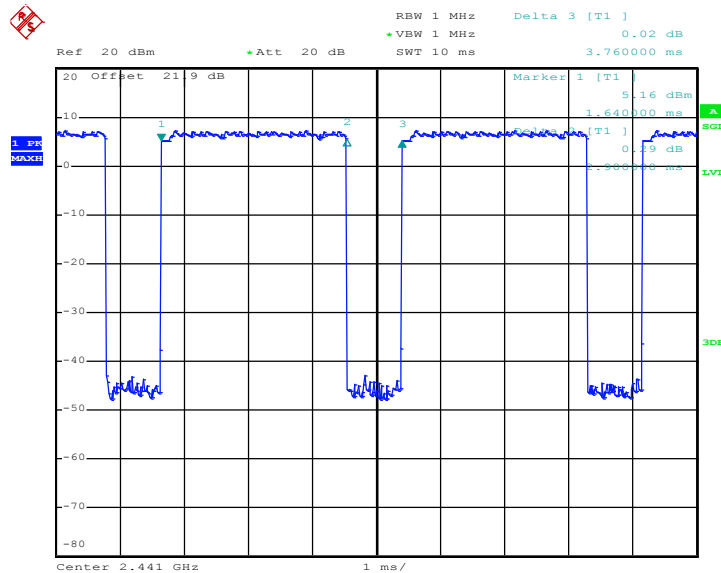
3.3.5 Test Result of Dwell Time

Test Mode :	DH5	Temperature :	24~26℃
Test Engineer :	Aking Chang	Relative Humidity :	48~51%

Mode	Hopping Channel Number	Hops Over Occupancy Time(hops)	Package Transfer Time (msec)	Dwell Time (sec)	Limits (sec)	Pass/Fail
Normal	79	106.67	2.90	0.31	0.4	Pass
AFH	20	53.33	2.90	0.15	0.4	Pass

Remark:

1. In normal mode, hopping rate is 1600 hops/s with 6 slots in 79 hopping channels.
With channel hopping rate (1600 / 6 / 79) in Occupancy Time Limit (0.4 x 79) (s),
Hops Over Occupancy Time comes to (1600 / 6 / 79) x (0.4 x 79) = 106.67 hops.
2. In AFH mode, hopping rate is 800 hops/s with 6 slots in 20 hopping channels.
With channel hopping rate (800 / 6 / 20) in Occupancy Time Limit (0.4 x 20) (s),
Hops Over Occupancy Time comes to (800 / 6 / 20) x (0.4 x 20) = 53.33 hops.
3. Dwell Time(s) = Hops Over Occupancy Time (hops) x Package Transfer Time

Package Transfer Time Plot


Date: 11.JAN.2017 21:41:00

3.4 20dB and 99% Bandwidth Measurement

3.4.1 Limit of 20dB and 99% Bandwidth

Reporting only

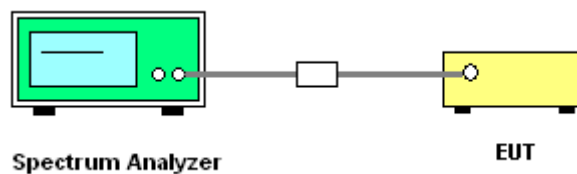
3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 6.9.2 and 6.9.3.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Use the following spectrum analyzer settings for 20dB Bandwidth measurement.
Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hopping channel;
RBW $\geq$ 1% of the 20 dB bandwidth; VBW $\geq$ RBW; Sweep = auto; Detector function = peak;
Trace = max hold.
5. Use the following spectrum analyzer settings for 99 % Bandwidth measurement.
Span = approximately 1.5 to 5 times the 99% bandwidth, centered on a hopping channel;
RBW $\geq$ 1% of the 99% bandwidth; VBW $\geq$ RBW; Sweep = auto; Detector function = peak;
Trace = max hold.
6. Measure and record the results in the test report.

3.4.4 Test Setup

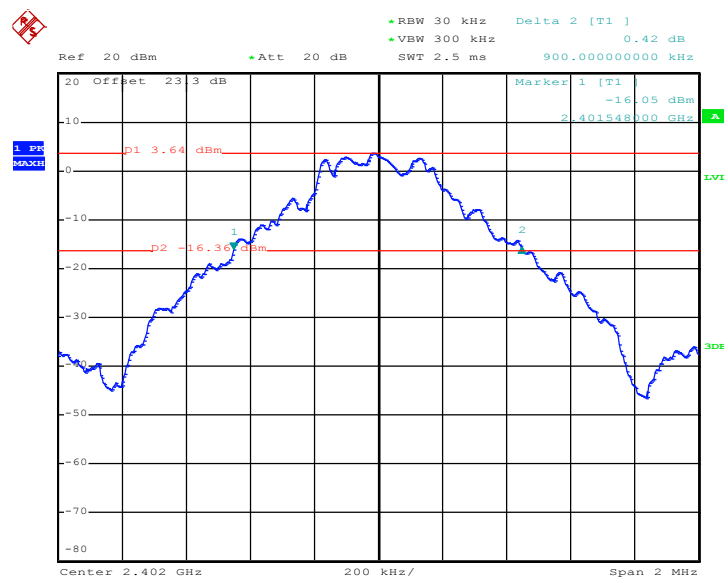


3.4.5 Test Result of 20dB Bandwidth

Test Mode :	1Mbps	Temperature :	24~26°C
Test Engineer :	Aking Chang	Relative Humidity :	48~51%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	0.900
39	2441	0.900
78	2480	0.924

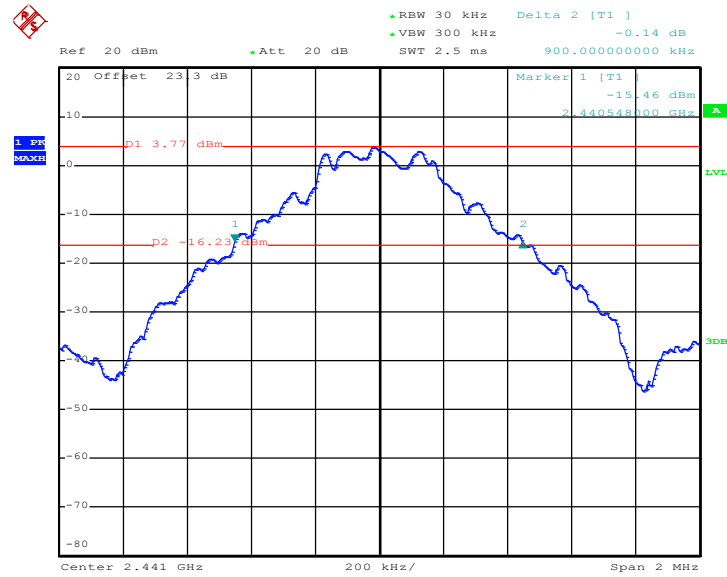
20 dB Bandwidth Plot on Channel 00



Date: 26.JAN.2017 23:07:04

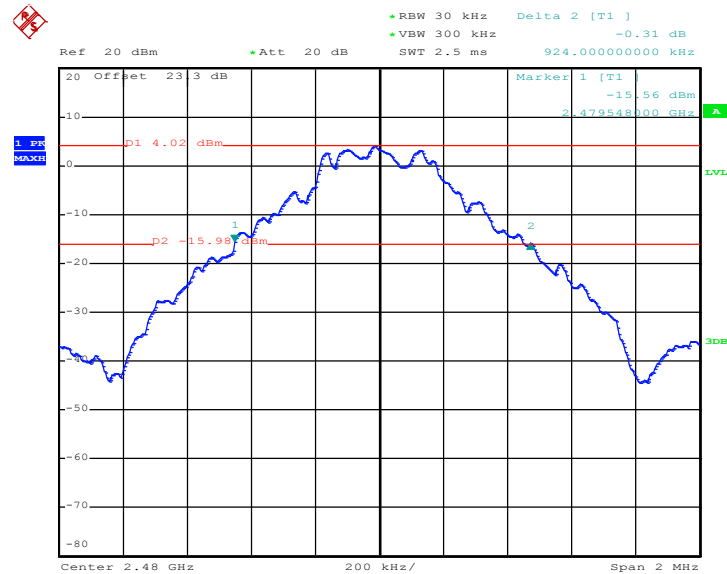


20 dB Bandwidth Plot on Channel 39



Date: 26.JAN.2017 23:13:13

20 dB Bandwidth Plot on Channel 78

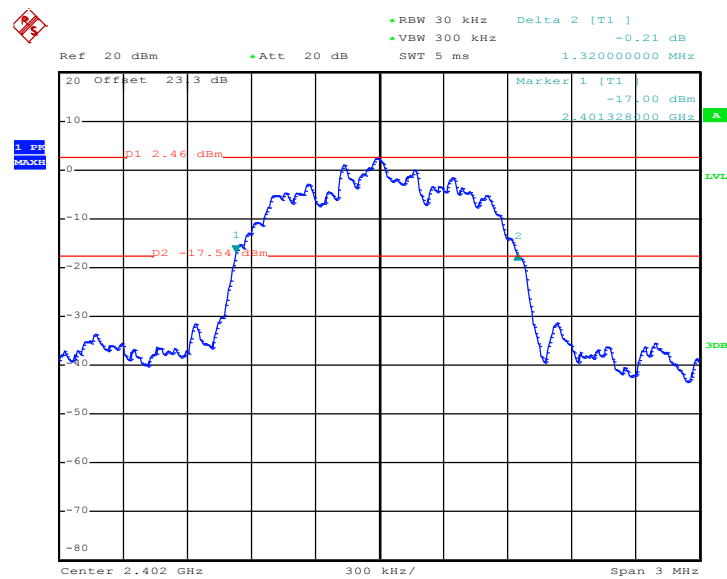


Date: 26.JAN.2017 23:17:11

Test Mode :	2Mbps	Temperature :	24~26℃
Test Engineer :	Aking Chang	Relative Humidity :	48~51%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.320
39	2441	1.338
78	2480	1.320

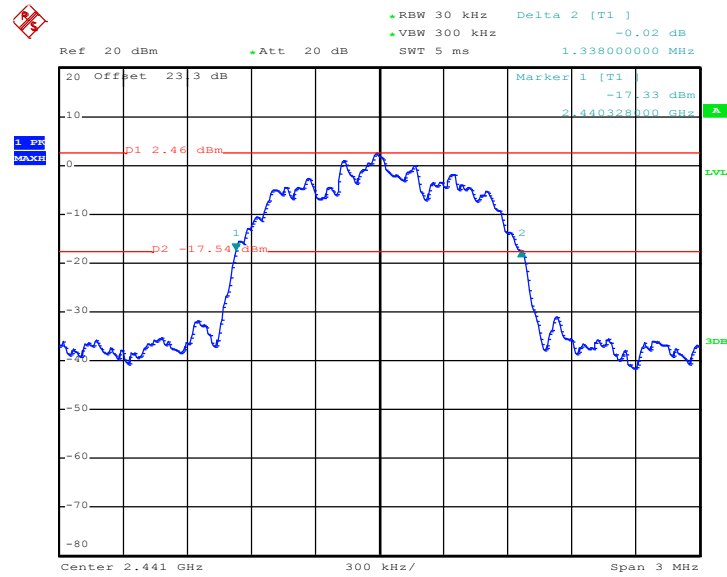
20 dB Bandwidth Plot on Channel 00



Date: 26.JAN.2017 23:21:30

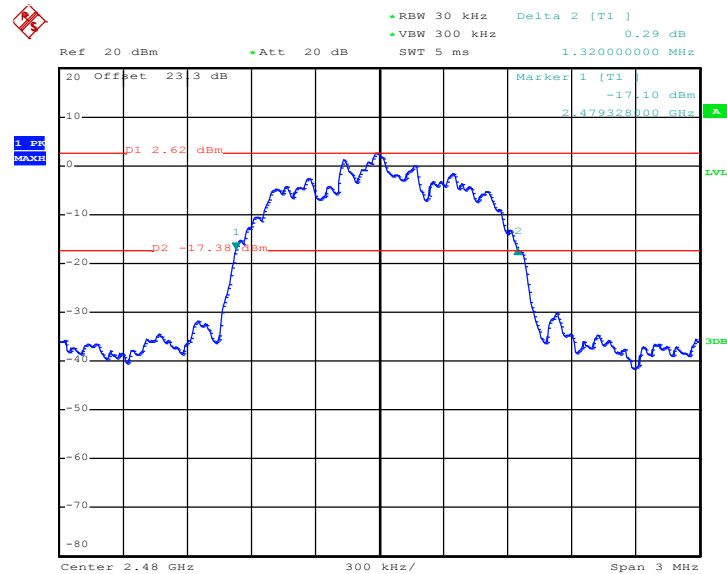


20 dB Bandwidth Plot on Channel 39



Date: 26.JAN.2017 23:25:02

20 dB Bandwidth Plot on Channel 78

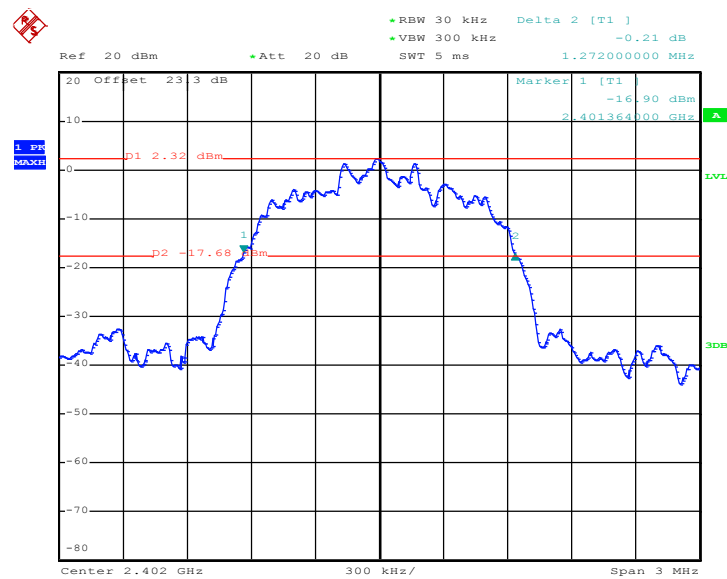


Date: 26.JAN.2017 23:29:10

Test Mode :	3Mbps	Temperature :	24~26℃
Test Engineer :	Aking Chang	Relative Humidity :	48~51%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.272
39	2441	1.278
78	2480	1.278

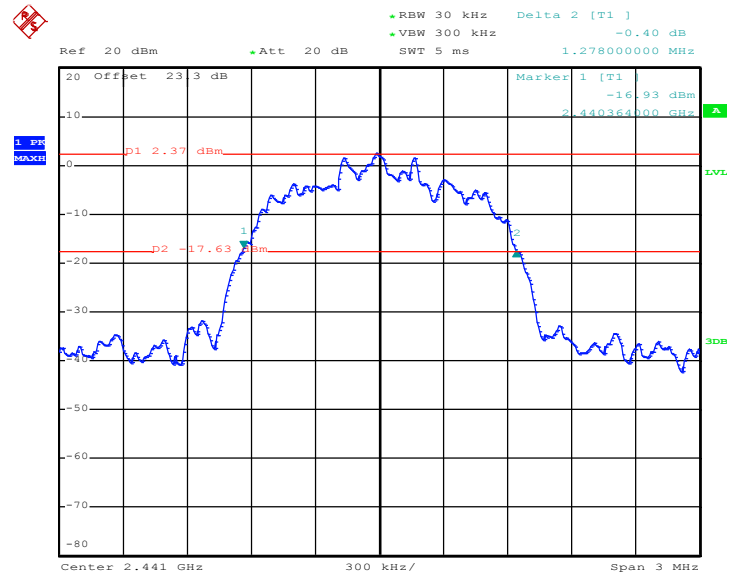
20 dB Bandwidth Plot on Channel 00



Date: 26.JAN.2017 23:35:04

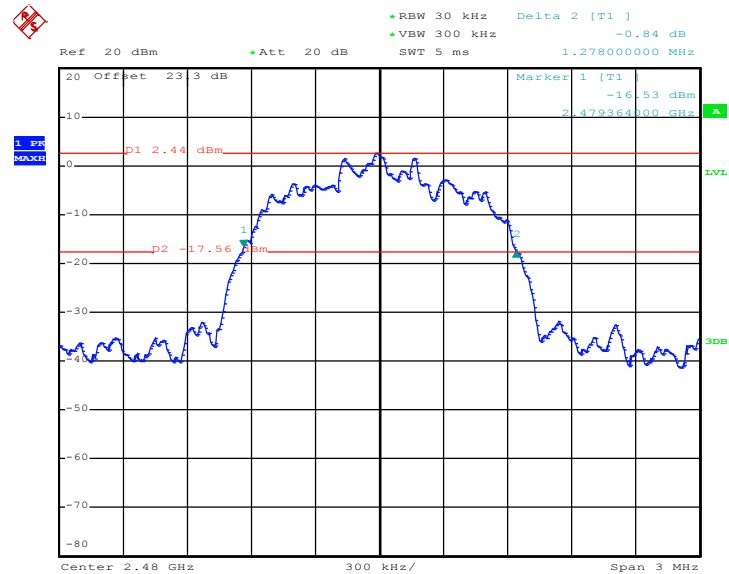


20 dB Bandwidth Plot on Channel 39



Date: 26.JAN.2017 23:43:27

20 dB Bandwidth Plot on Channel 78



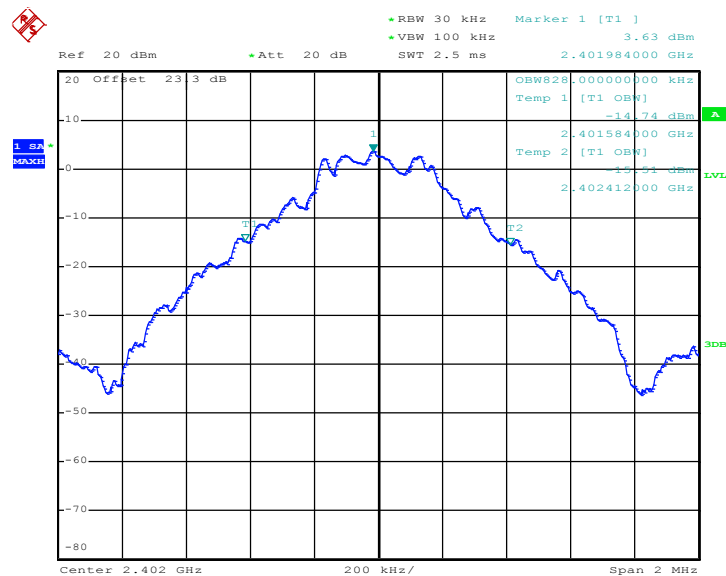
Date: 26.JAN.2017 23:50:47

3.4.6 Test Result of 99% Occupied Bandwidth

Test Mode :	1Mbps	Temperature :	24~26°C
Test Engineer :	Aking Chang	Relative Humidity :	48~51%

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
00	2402	0.828
39	2441	0.828
78	2480	0.828

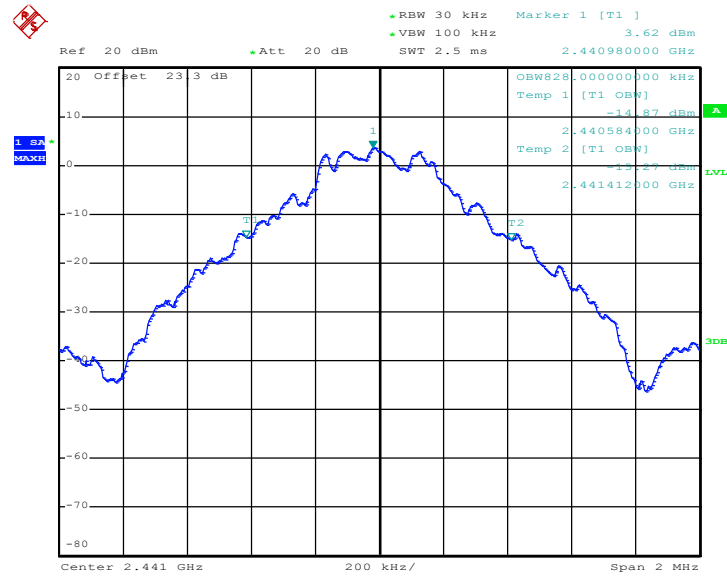
99% Occupied Bandwidth Plot on Channel 00



Date: 26.JAN.2017 23:05:43

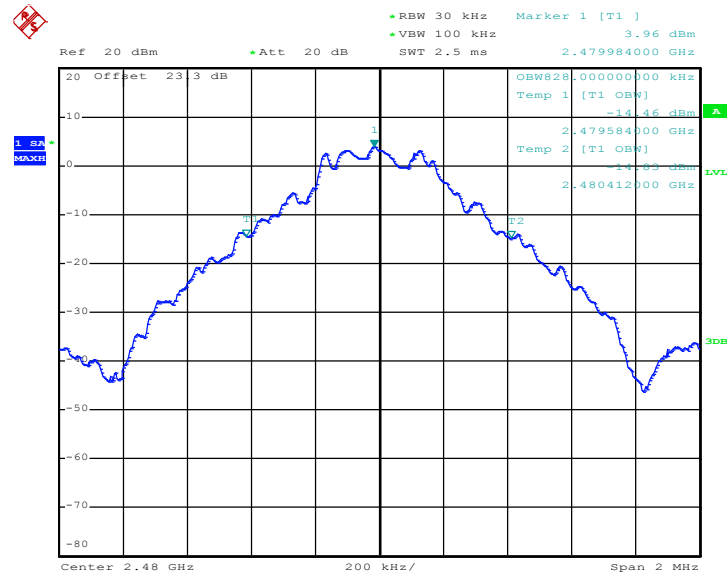


99% Occupied Bandwidth Plot on Channel 39



Date: 26.JAN.2017 23:10:27

99% Occupied Bandwidth Plot on Channel 78

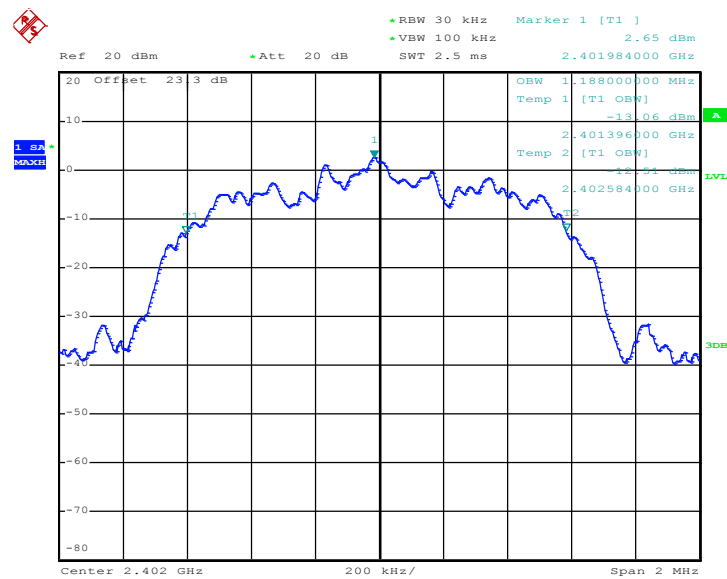


Date: 26.JAN.2017 23:14:42



Test Mode :	2Mbps	Temperature :	24~26°C
Test Engineer :	Aking Chang	Relative Humidity :	48~51%

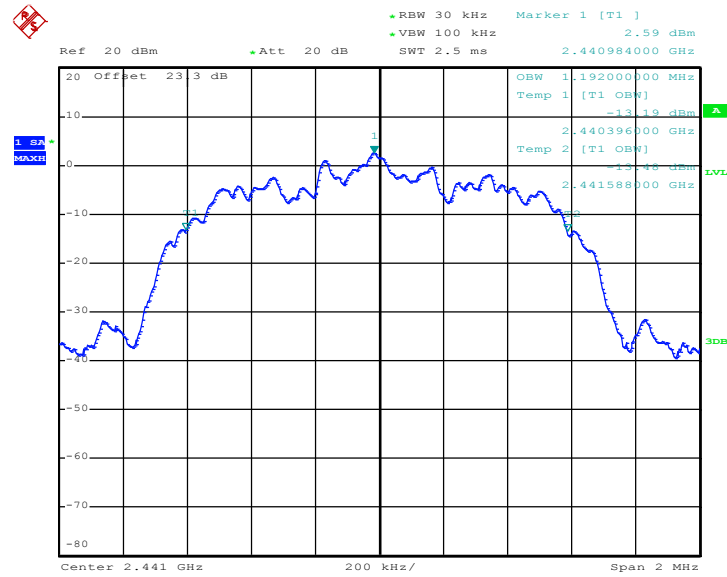
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
00	2402	1.188
39	2441	1.192
78	2480	1.192

99% Occupied Bandwidth Plot on Channel 00

Date: 26.JAN.2017 23:18:51

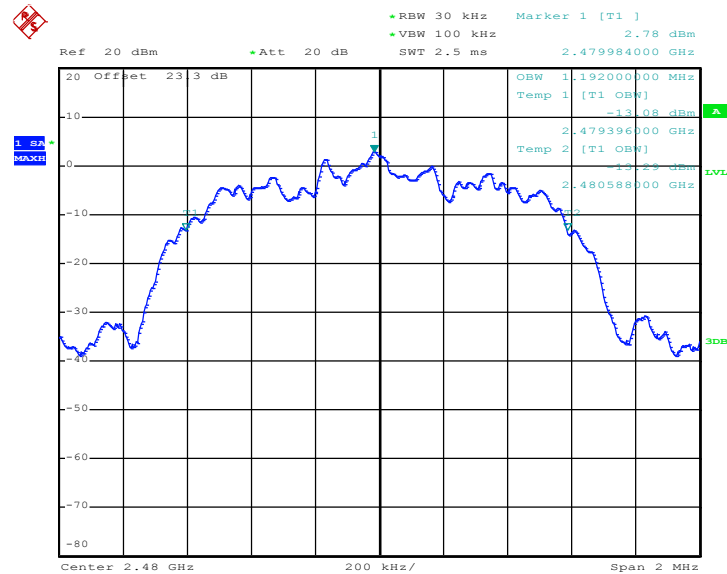


99% Occupied Bandwidth Plot on Channel 39



Date: 26.JAN.2017 23:23:00

99% Occupied Bandwidth Plot on Channel 78

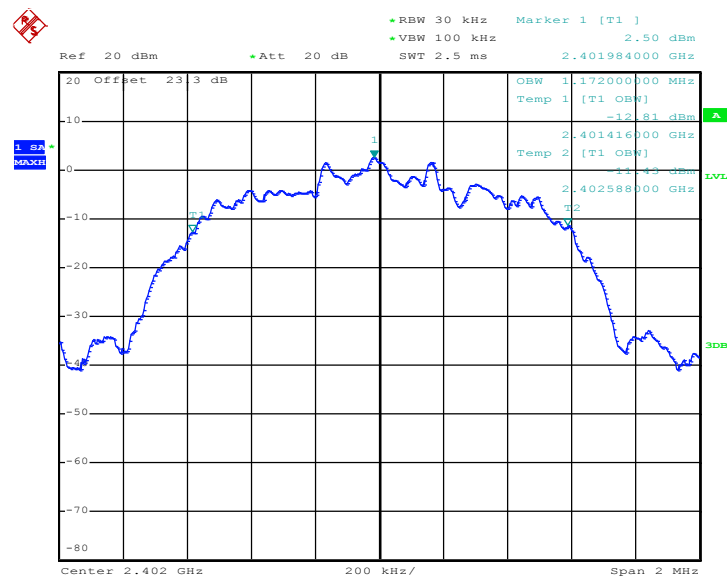


Date: 26.JAN.2017 23:26:33



Test Mode :	3Mbps	Temperature :	24~26°C
Test Engineer :	Aking Chang	Relative Humidity :	48~51%

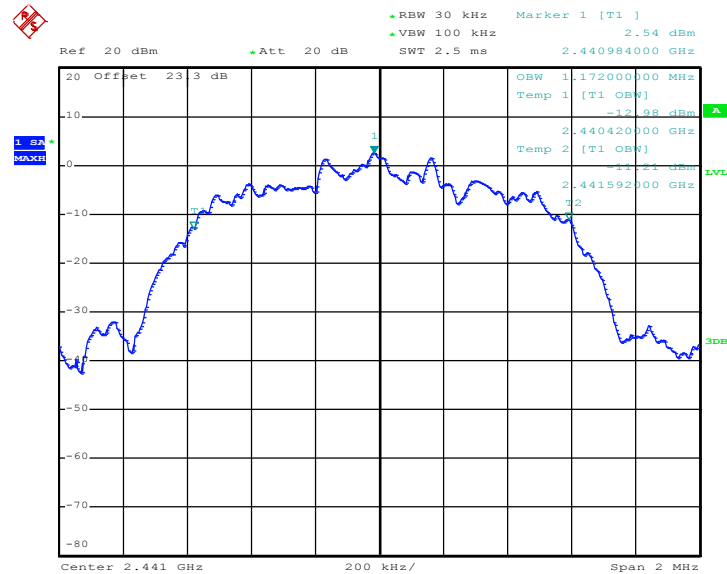
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
00	2402	1.172
39	2441	1.172
78	2480	1.172

99% Occupied Bandwidth Plot on Channel 00

Date: 26.JAN.2017 23:31:33

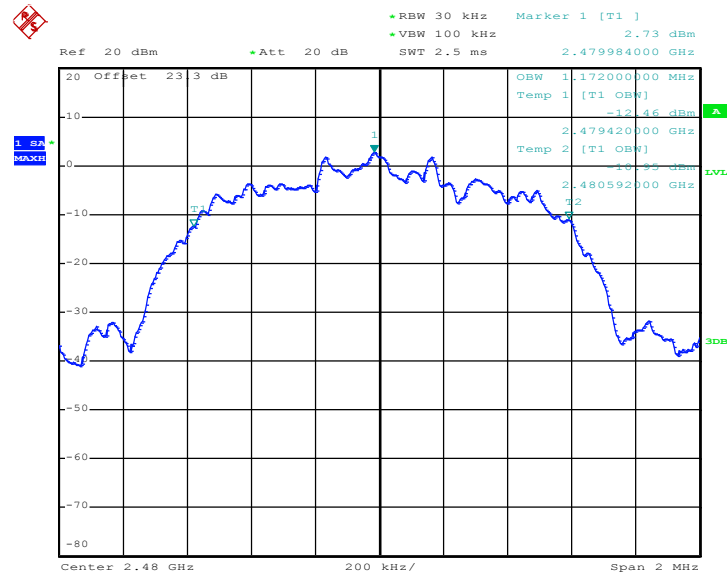


99% Occupied Bandwidth Plot on Channel 39



Date: 26.JAN.2017 23:40:07

99% Occupied Bandwidth Plot on Channel 78



Date: 26.JAN.2017 23:45:03

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.5 Peak Output Power Measurement

3.5.1 Limit of Peak Output Power

Section 15.247 (b) The maximum peak conducted output power of the intentional radiator shall not exceed the following: (1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts. The power limit for 1Mbps, 2Mbps, 3Mbps and AFH modes are 0.125 watts.

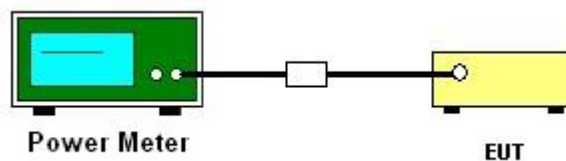
3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.5.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power with cable loss and record the results in the test report.
5. Measure and record the results in the test report.

3.5.4 Test Setup



3.5.5 Test Result of Peak Output Power

Test Mode :	1Mbps	Temperature :	24~26°C
Test Engineer :	Aking Chang	Relative Humidity :	48~51%

Channel	Frequency (MHz)	RF Power (dBm)		
		GFSK	Max. Limits (dBm)	Pass/Fail
		1 Mbps		
00	2402	6.31	20.97	Pass
39	2441	6.33	20.97	Pass
78	2480	6.21	20.97	Pass

Note: For AFH mode using 20 hopping channels, the maximum output power limit is 20.97dBm.

Test Mode :	2Mbps	Temperature :	24~26°C
Test Engineer :	Aking Chang	Relative Humidity :	48~51%

Channel	Frequency (MHz)	RF Power (dBm)		
		$\pi/4$ -DQPSK	Max. Limits (dBm)	Pass/Fail
		2 Mbps		
00	2402	7.36	20.97	Pass
39	2441	7.45	20.97	Pass
78	2480	7.44	20.97	Pass

Test Mode :	3Mbps	Temperature :	24~26°C
Test Engineer :	Aking Chang	Relative Humidity :	48~51%

Channel	Frequency (MHz)	RF Power (dBm)		
		8-DPSK	Max. Limits (dBm)	Pass/Fail
		3 Mbps		
00	2402	7.85	20.97	Pass
39	2441	7.96	20.97	Pass
78	2480	7.97	20.97	Pass

3.6 Conducted Band Edges Measurement

3.6.1 Limit of Band Edges

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.

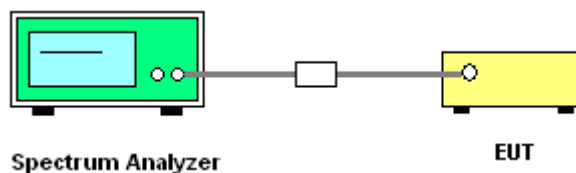
3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.6.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Set RBW = 100kHz, VBW = 300kHz. Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100kHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used.
4. Enable hopping function of the EUT and then repeat step 2. and 3.
5. Measure and record the results in the test report.

3.6.4 Test Setup

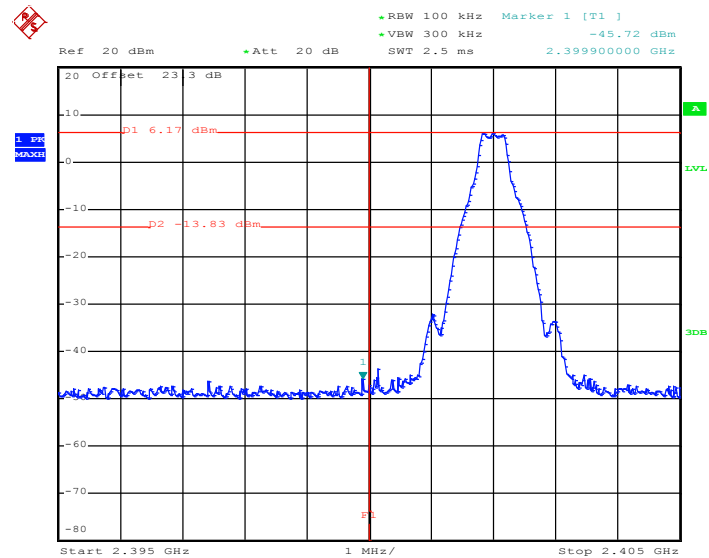




3.6.5 Test Result of Conducted Band Edges

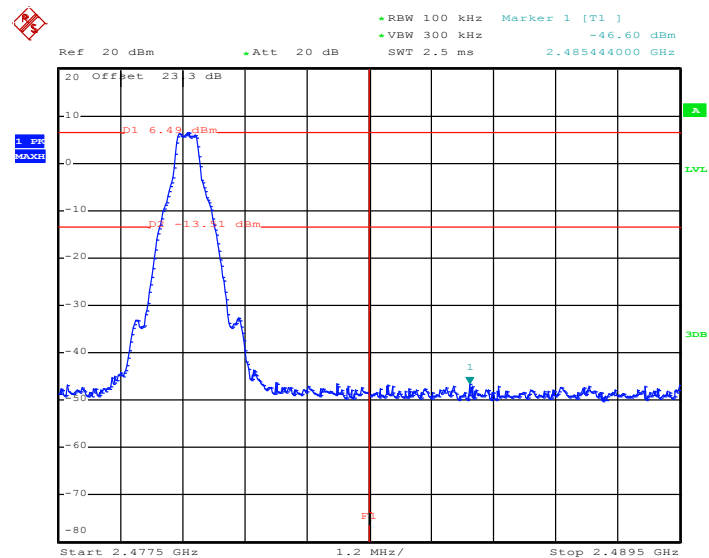
Test Mode :	1Mbps	Temperature :	24~26℃
Test Channel :	00 and 78	Relative Humidity :	48~51%
		Test Engineer :	Aking Chang

Low Band Edge Plot on Channel 00



Date: 26.JAN.2017 23:06:04

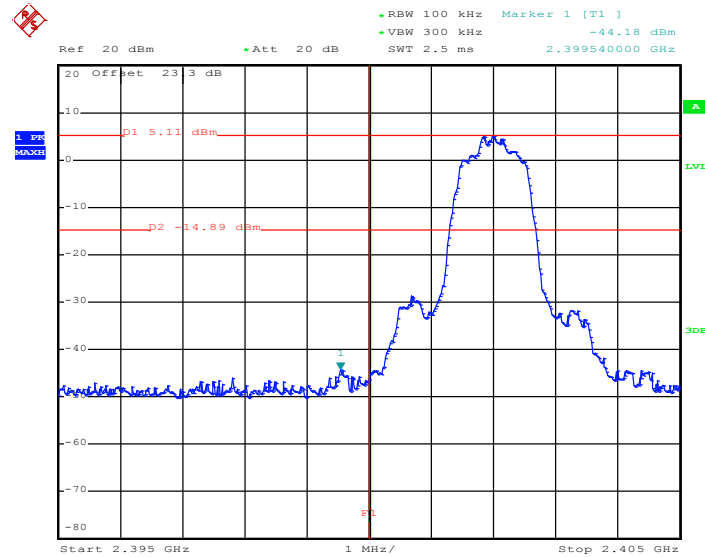
High Band Edge Plot on Channel 78



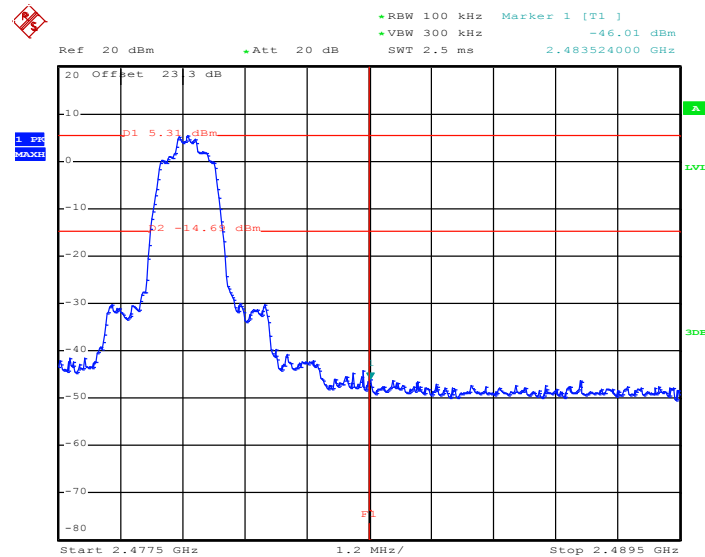
Date: 26.JAN.2017 23:15:02



Test Mode :	2Mbps	Temperature :	24~26°C
Test Channel :	00 and 78	Relative Humidity :	48~51%
		Test Engineer :	Aking Chang

Low Band Edge Plot on Channel 00

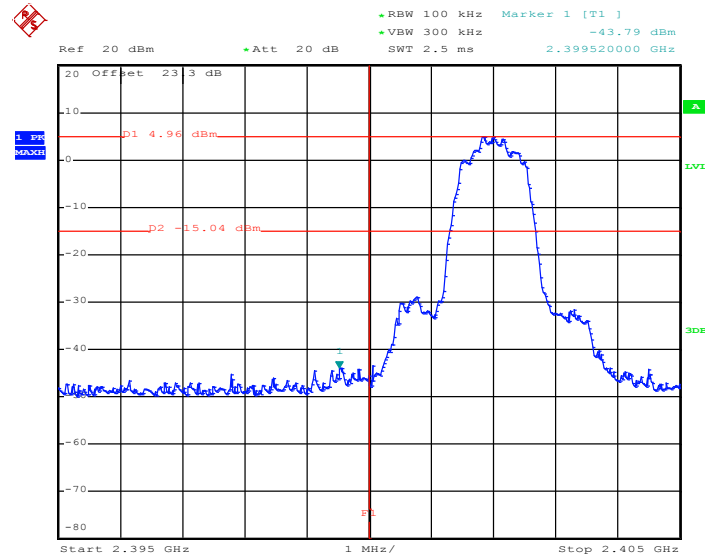
Date: 26.JAN.2017 23:19:21

High Band Edge Plot on Channel 78

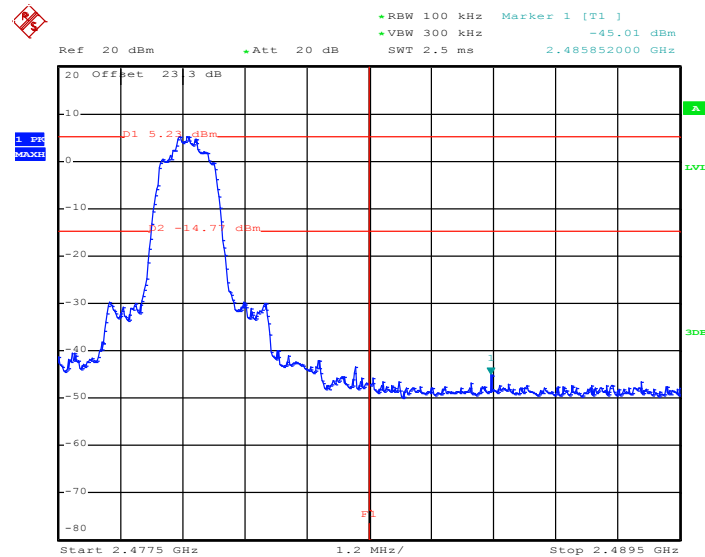
Date: 26.JAN.2017 23:26:52



Test Mode :	3Mbps	Temperature :	24~26°C
Test Channel :	00 and 78	Relative Humidity :	48~51%
		Test Engineer :	Aking Chang

Low Band Edge Plot on Channel 00

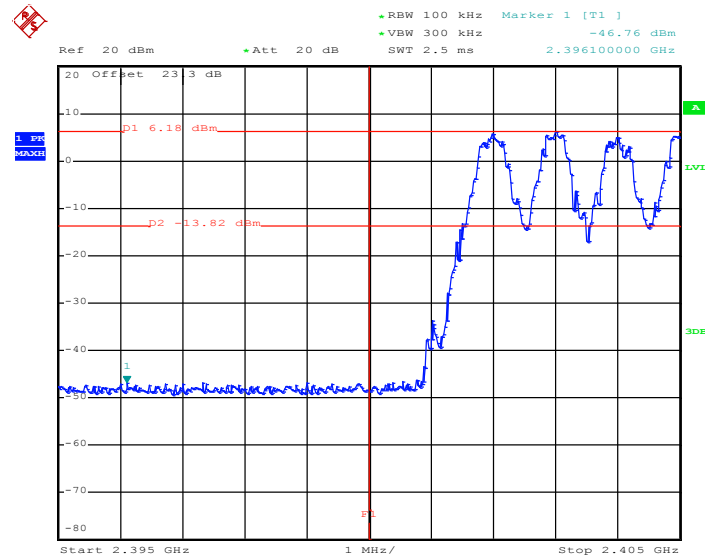
Date: 26.JAN.2017 23:32:02

High Band Edge Plot on Channel 78

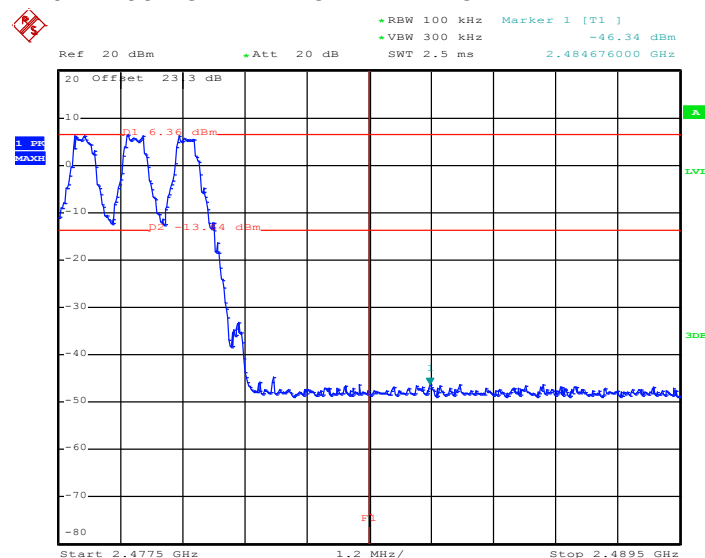
Date: 26.JAN.2017 23:46:33

3.6.6 Test Result of Conducted Hopping Mode Band Edges

Test Mode :	1Mbps	Temperature :	24~26°C
Test Engineer :	Aking Chang	Relative Humidity :	48~51%

1Mbps Hopping Mode Low Band Edge Plot


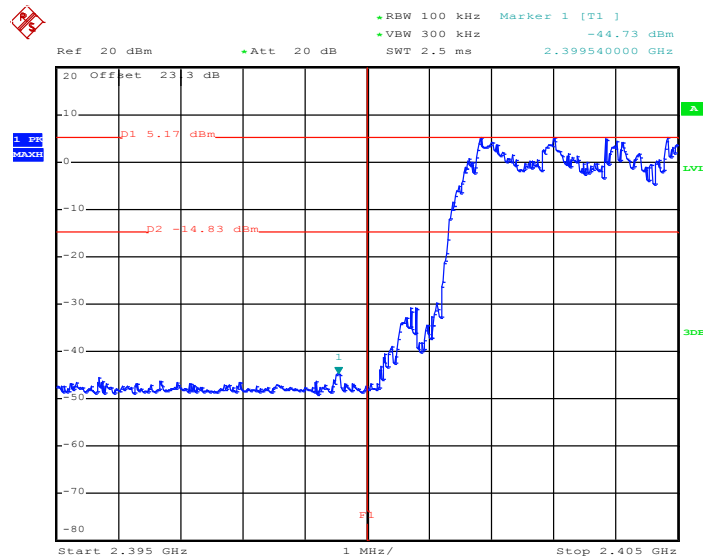
Date: 26.JAN.2017 22:51:31

1Mbps Hopping Mode High Band Edge Plot


Date: 26.JAN.2017 22:52:52

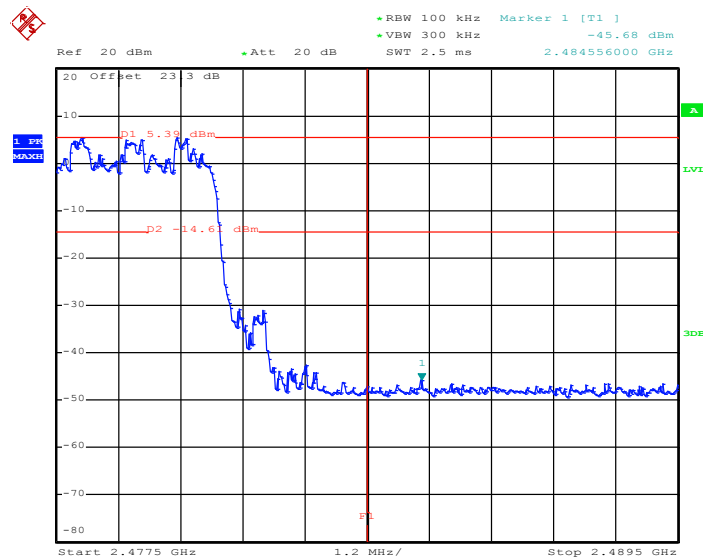
Test Mode :	2Mbps	Temperature :	24~26℃
Test Engineer :	Aking Chang	Relative Humidity :	48~51%

2Mbps Hopping Mode Low Band Edge Plot



Date: 26.JAN.2017 22:55:49

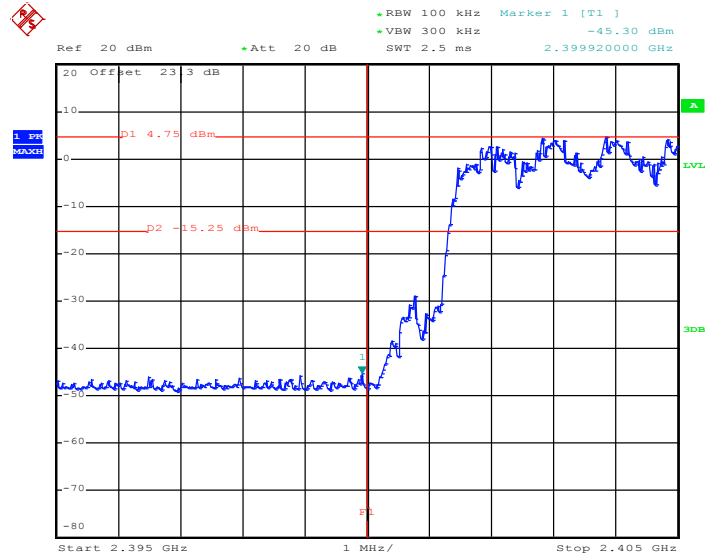
2Mbps Hopping Mode High Band Edge Plot



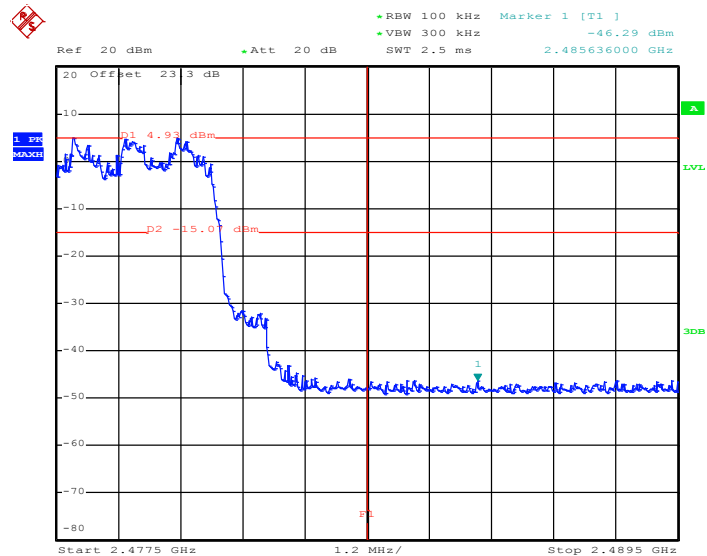
Date: 26.JAN.2017 22:54:04



Test Mode :	3Mbps	Temperature :	24~26°C
Test Engineer :	Aking Chang	Relative Humidity :	48~51%

3Mbps Hopping Mode Low Band Edge Plot

Date: 26.JAN.2017 22:57:23

3Mbps Hopping Mode High Band Edge Plot

Date: 26.JAN.2017 22:58:40

3.7 Conducted Spurious Emission Measurement

3.7.1 Limit of Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.

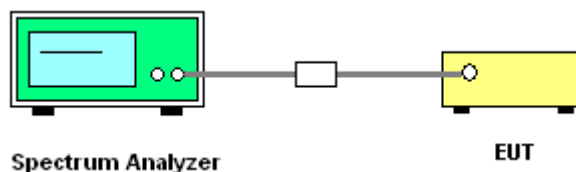
3.7.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.7.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 7.8.8.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW = 300kHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.7.4 Test Setup

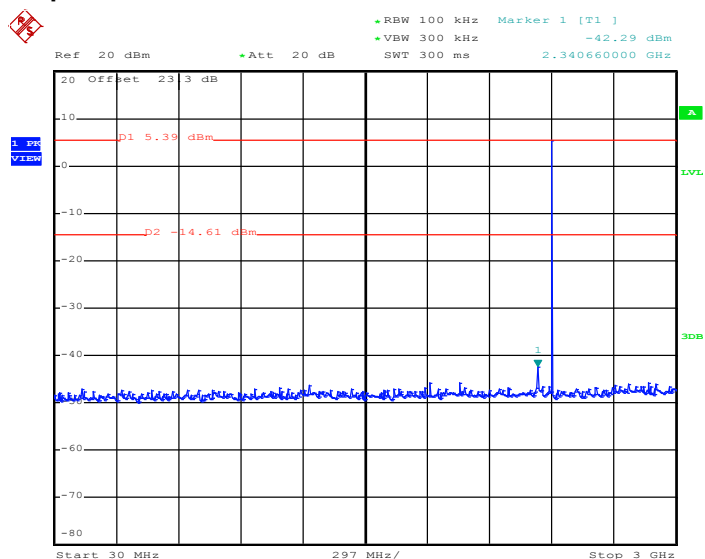




3.7.5 Test Result of Conducted Spurious Emission

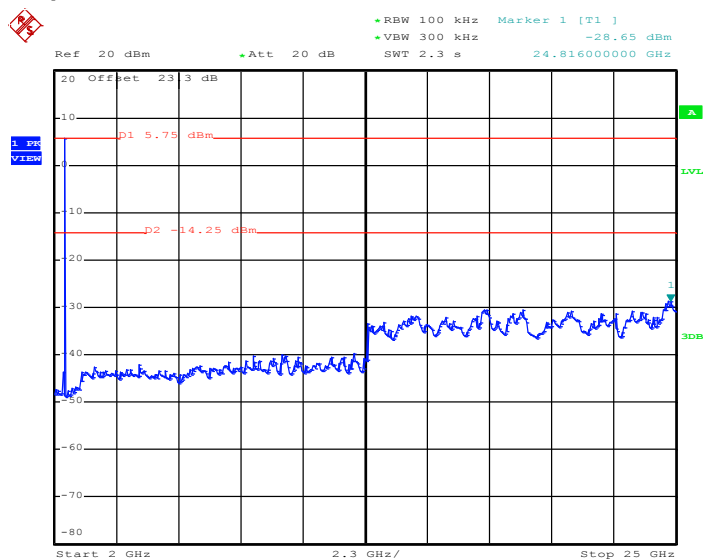
Test Mode :	1Mbps	Temperature :	24~26°C
Test Channel :	00	Relative Humidity :	48~51%
		Test Engineer :	Aking Chang

1Mbps CSE Plot on Ch 00 between 30MHz ~ 3 GHz



Date: 26.JAN.2017 23:02:20

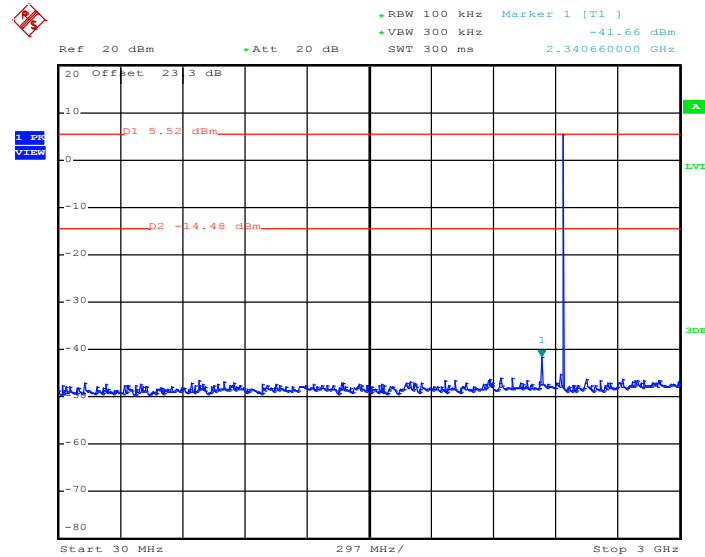
1Mbps CSE Plot on Ch 00 between 2 GHz ~ 25 GHz



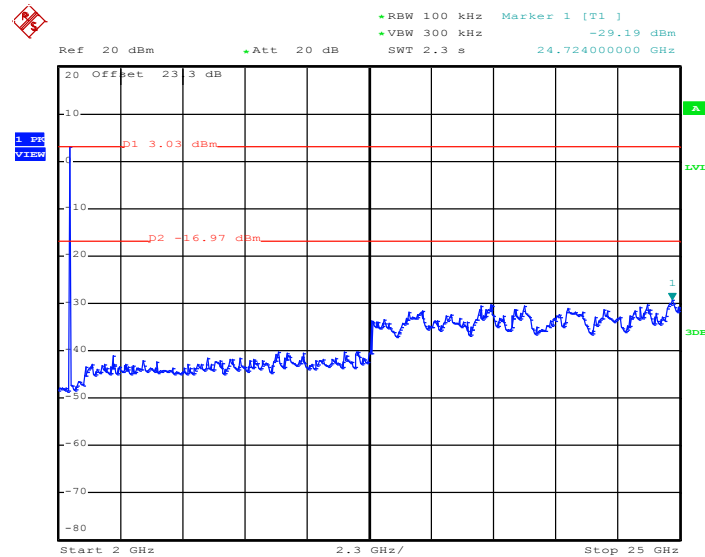
Date: 26.JAN.2017 23:02:41



Test Mode :	1Mbps	Temperature :	24~26°C
Test Channel :	39	Relative Humidity :	48~51%
		Test Engineer :	Aking Chang

1Mbps CSE Plot on Ch 39 between 30MHz ~ 3 GHz

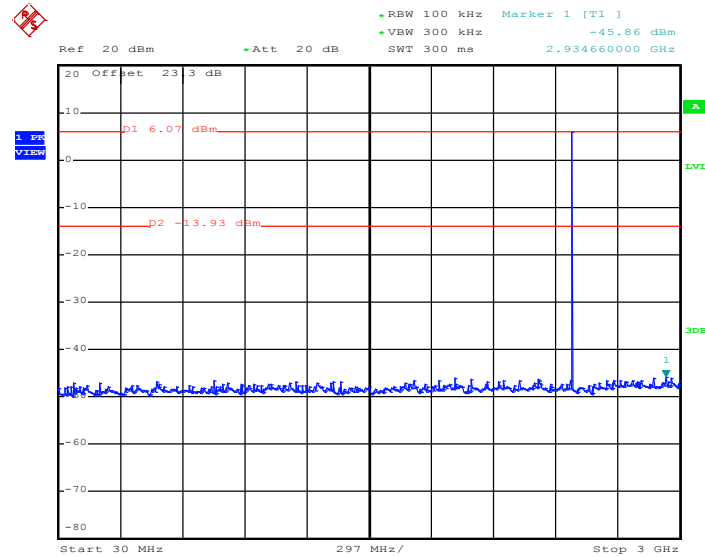
Date: 26.JAN.2017 23:10:52

1Mbps CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

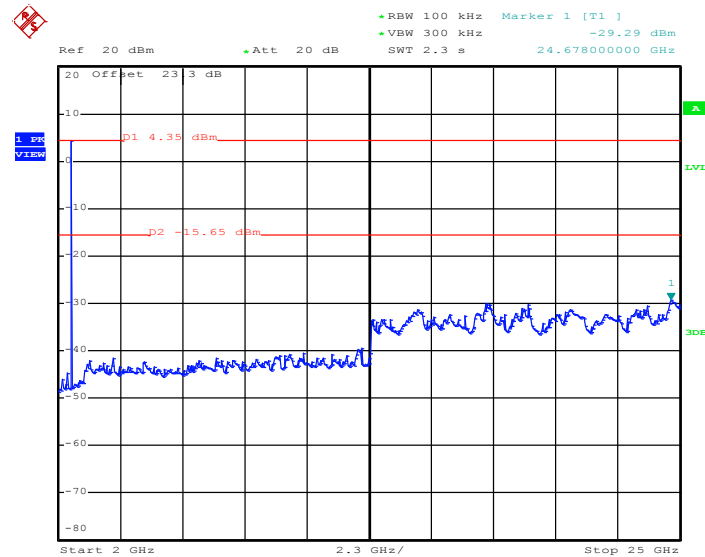
Date: 26.JAN.2017 23:11:14



Test Mode :	1Mbps	Temperature :	24~26°C
Test Channel :	78	Relative Humidity :	48~51%
		Test Engineer :	Aking Chang

1Mbps CSE Plot on Ch 78 between 30MHz ~ 3 GHz

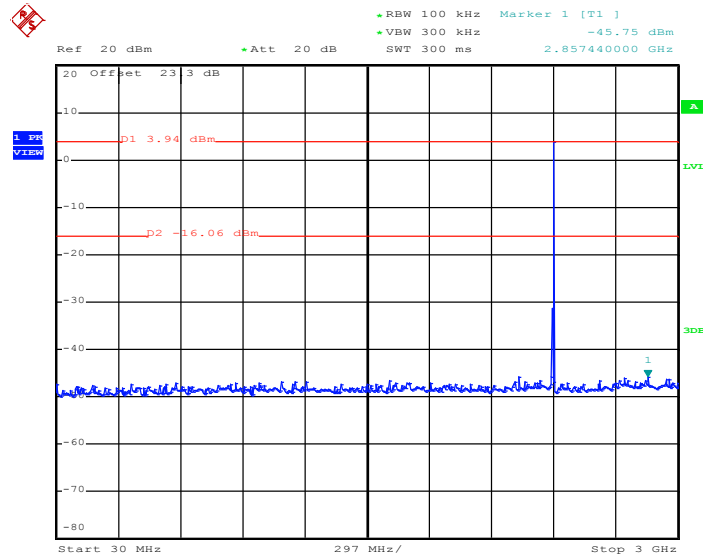
Date: 26.JAN.2017 23:13:45

1Mbps CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

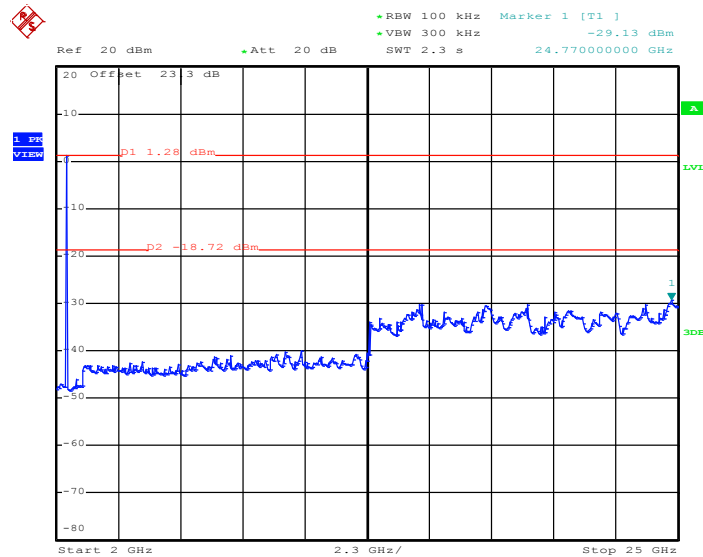
Date: 26.JAN.2017 23:14:07



Test Mode :	2Mbps	Temperature :	24~26°C
Test Channel :	00	Relative Humidity :	48~51%
		Test Engineer :	Aking Chang

2Mbps CSE Plot on Ch 00 between 30MHz ~ 3 GHz

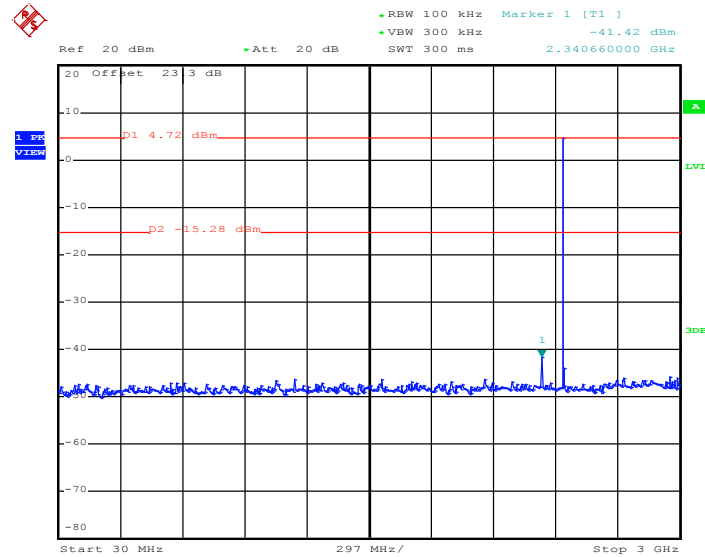
Date: 26.JAN.2017 23:17:55

2Mbps CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

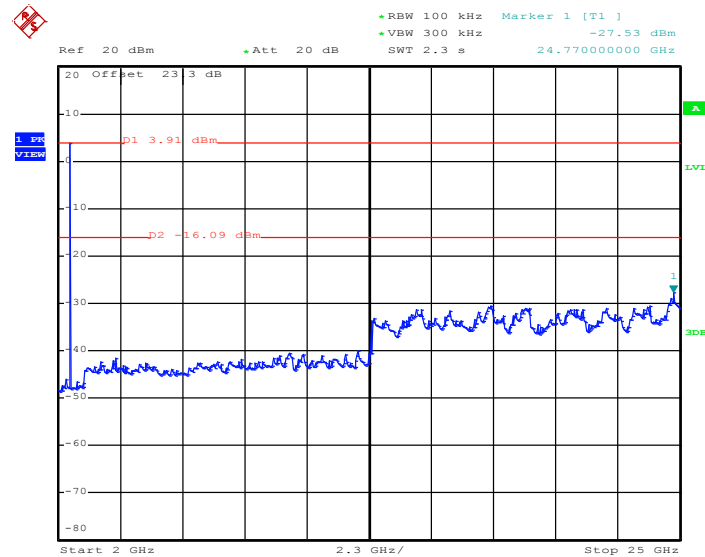
Date: 26.JAN.2017 23:18:17



Test Mode :	2Mbps	Temperature :	24~26°C
Test Channel :	39	Relative Humidity :	48~51%
		Test Engineer :	Aking Chang

2Mbps CSE Plot on Ch 39 between 30MHz ~ 3 GHz

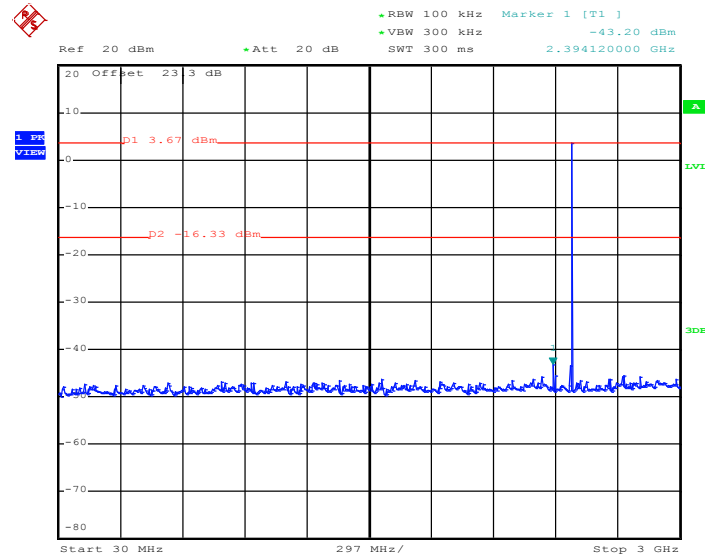
Date: 26.JAN.2017 23:22:04

2Mbps CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

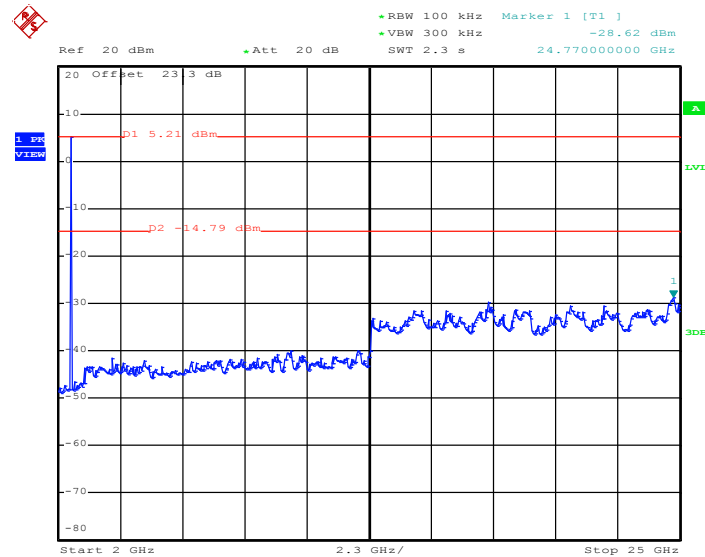
Date: 26.JAN.2017 23:22:26



Test Mode :	2Mbps	Temperature :	24~26°C
Test Channel :	78	Relative Humidity :	48~51%
		Test Engineer :	Aking Chang

2Mbps CSE Plot on Ch 78 between 30MHz ~ 3 GHz

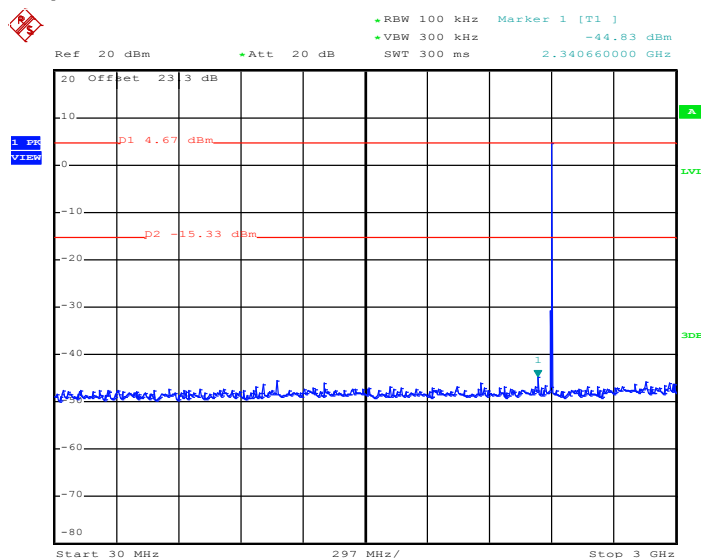
Date: 26.JAN.2017 23:25:37

2Mbps CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

Date: 26.JAN.2017 23:25:59

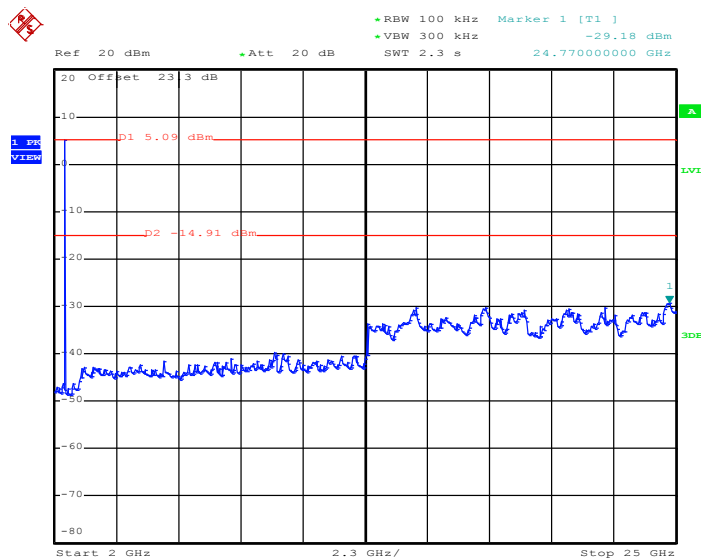
Test Mode :	3Mbps	Temperature :	24~26℃
Test Channel :	00	Relative Humidity :	48~51%
		Test Engineer :	Aking Chang

3Mbps CSE Plot on Ch 00 between 30MHz ~ 3 GHz



Date: 26.JAN.2017 23:30:26

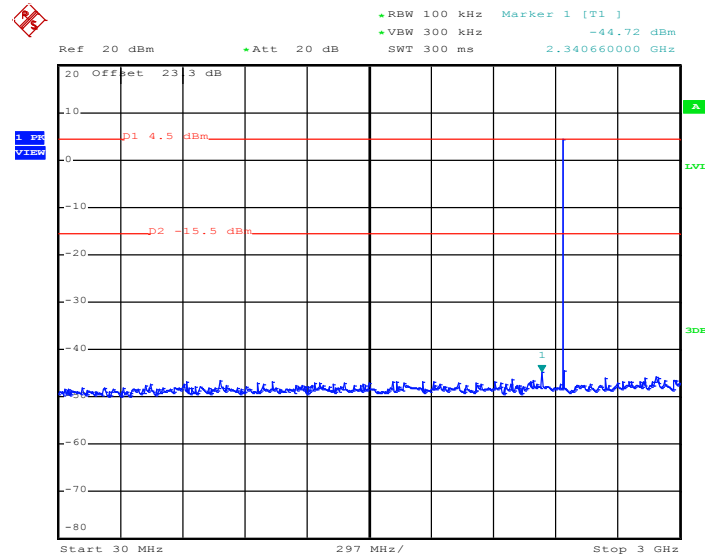
3Mbps CSE Plot on Ch 00 between 2 GHz ~ 25 GHz



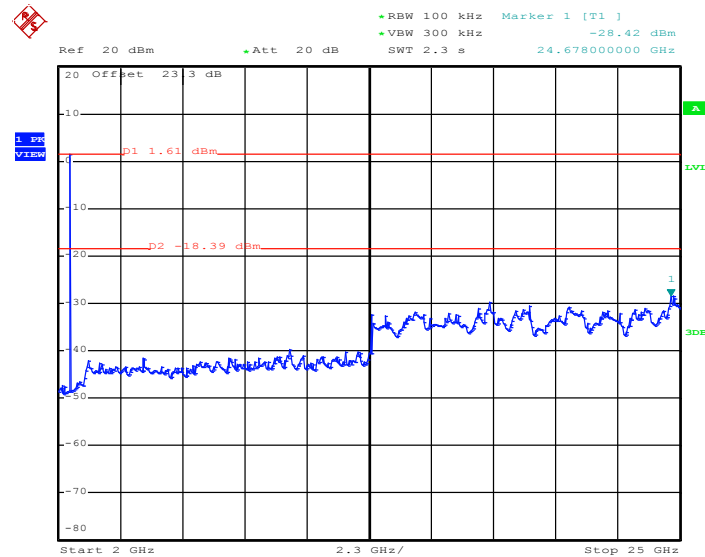
Date: 26.JAN.2017 23:30:48



Test Mode :	3Mbps	Temperature :	24~26°C
Test Channel :	39	Relative Humidity :	48~51%
		Test Engineer :	Aking Chang

3Mbps CSE Plot on Ch 39 between 30MHz ~ 3 GHz

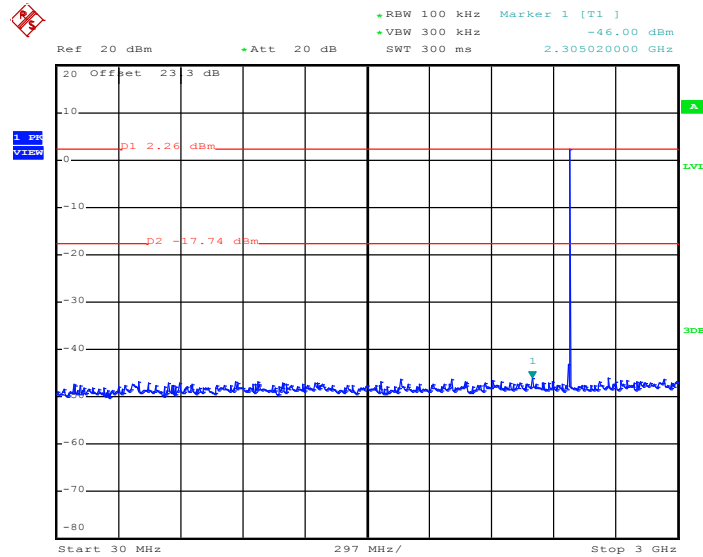
Date: 26.JAN.2017 23:38:55

3Mbps CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

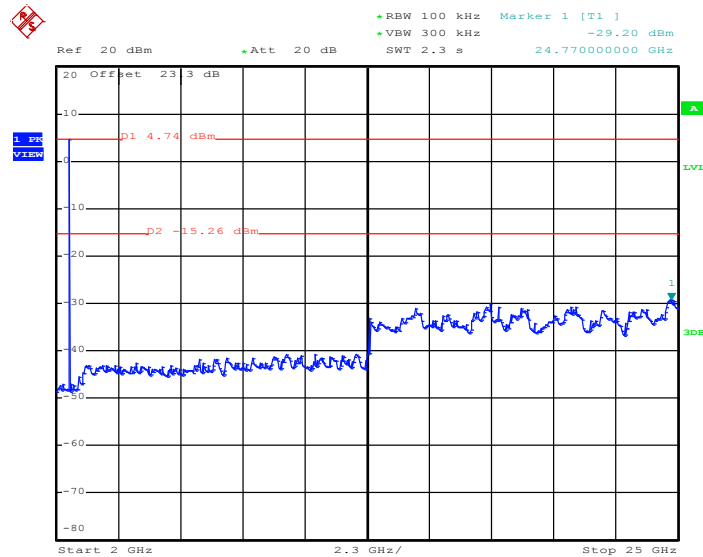
Date: 26.JAN.2017 23:39:17



Test Mode :	3Mbps	Temperature :	24~26°C
Test Channel :	78	Relative Humidity :	48~51%
		Test Engineer :	Aking Chang

3Mbps CSE Plot on Ch 78 between 30MHz ~ 3 GHz

Date: 26.JAN.2017 23:48:25

3Mbps CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

Date: 26.JAN.2017 23:48:47



3.8 Radiated Band Edges and Spurious Emission Measurement

3.8.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.8.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.



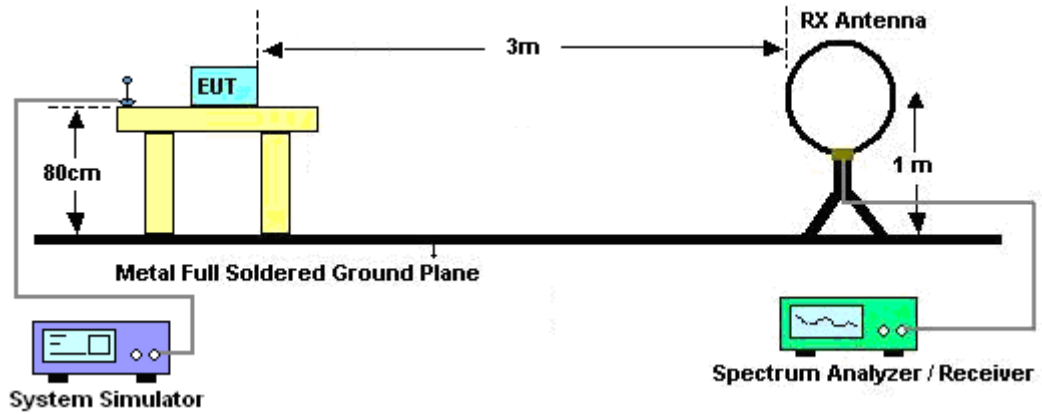
3.8.3 Test Procedures

1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
4. Set to the maximum power setting and enable the EUT transmit continuously.
5. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz, RBW=1MHz for $f > 1$ GHz ; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
 - (3) For average measurement: use duty cycle correction factor method per 15.35(c).
Duty cycle = On time/100 milliseconds
On time = $N_1 * L_1 + N_2 * L_2 + \dots + N_{n-1} * L_{n-1} + N_n * L_n$
Where N_1 is number of type 1 pulses, L_1 is length of type 1 pulses, etc.
Average Emission Level = Peak Emission Level + $20 * \log(\text{Duty cycle})$
6. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

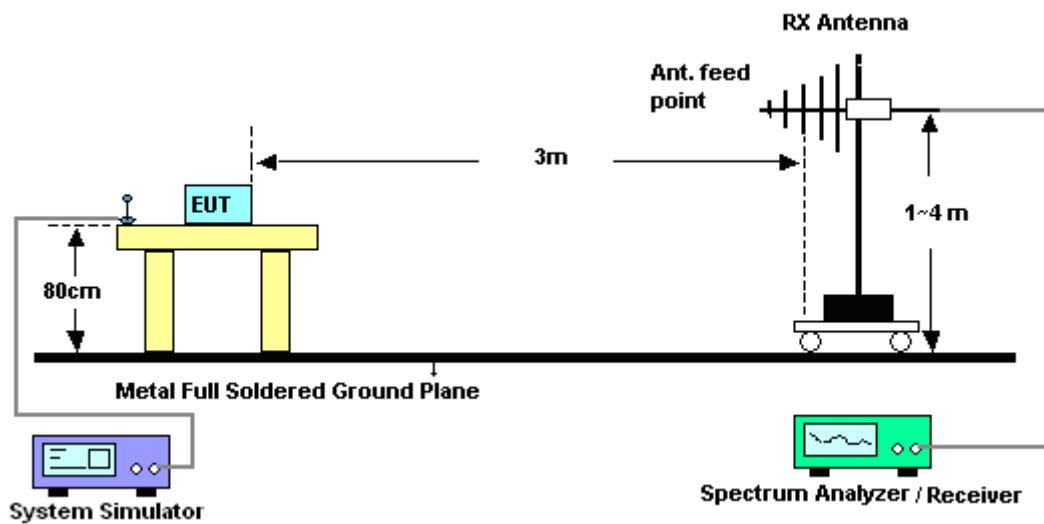
Note: The average levels were calculated from the peak level corrected with duty cycle correction factor (-24.73dB) derived from $20 \log(\text{dwell time}/100\text{ms})$. This correction is only for signals that hop with the fundamental signal, such as band-edge and harmonic. Other spurious signals that are independent of the hopping signal would not use this correction.

3.8.4 Test Setup

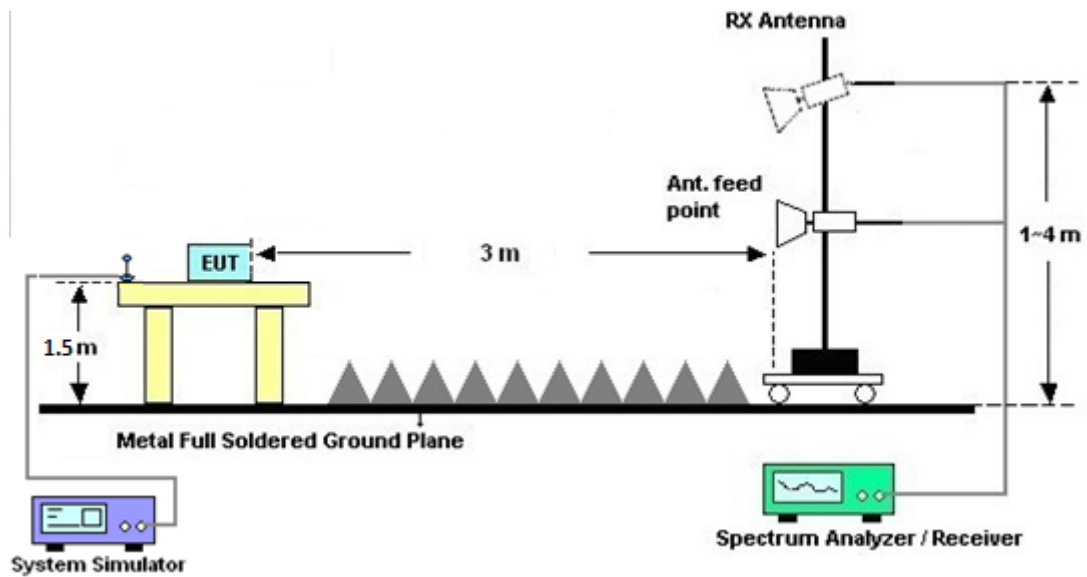
For radiated emissions below 30MHz



For radiated emissions from 30MHz to 1GHz



For radiated emissions above 1GHz

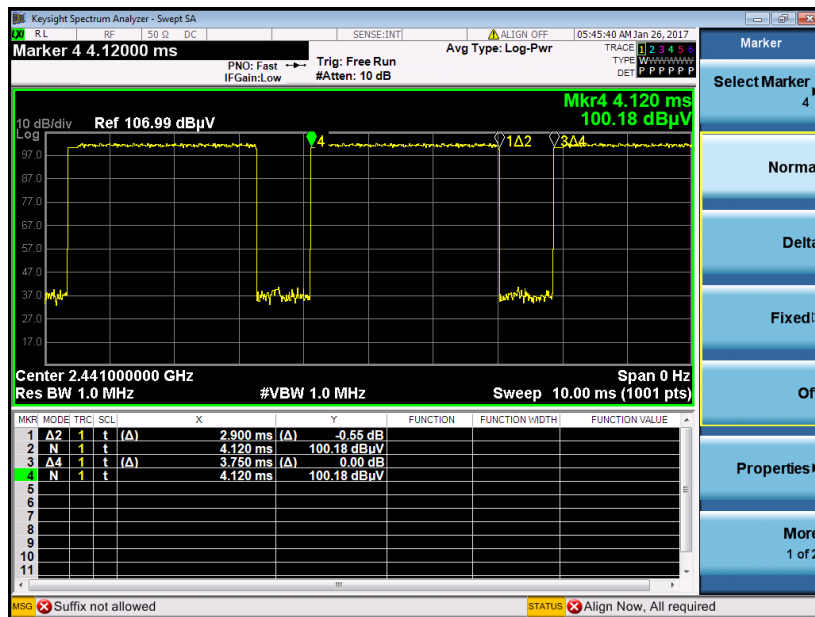


3.8.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

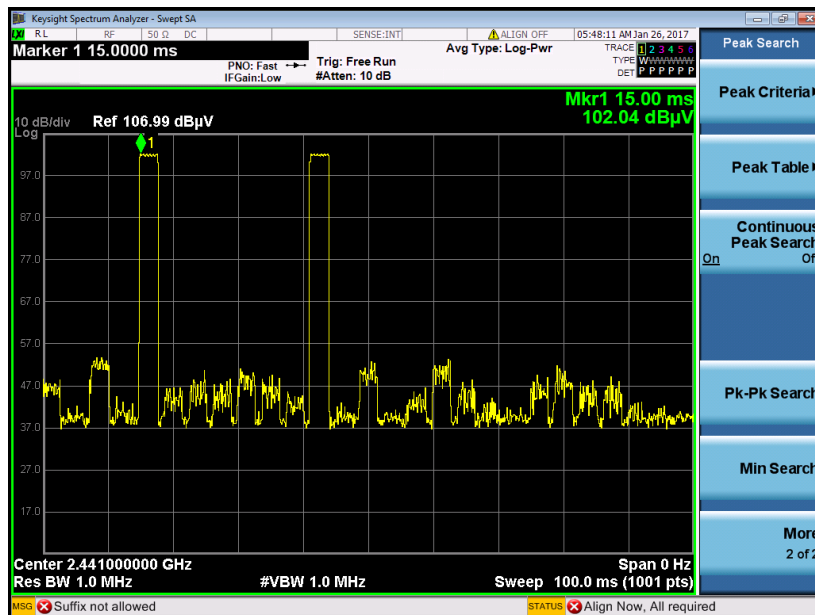
The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

3.8.6 Duty cycle correction factor for average measurement

3DH5 on time (One Pulse) Plot on Channel 39



3DH5 on time (Count Pulses) Plot on Channel 39



Note:

1. Worst case Duty cycle = on time/100 milliseconds = $2 * 2.90 / 100 = 5.80 \%$
2. Worst case Duty cycle correction factor = $20 * \log(\text{Duty cycle}) = -24.73 \text{ dB}$
3. 3DH5 has the highest duty cycle worst case and is reported.

Duty Cycle Correction Factor Consideration for AFH mode:

Bluetooth normal hopping rate is 1600Hz and reduced to 800Hz in AFH mode; due to the reduced number of hopping frequencies, with the same packet configuration the dwell time in each channel frequency within 100msec period is longer in AFH mode than normal mode.

In AFH mode, the minimum hopping frequencies are 20, to get the longest dwell time DH5 packet is observed; the period to have DH5 packet completing one hopping sequence is

$$2.90 \text{ ms} \times 20 \text{ channels} = 58.0 \text{ ms}$$

There cannot be 2 complete hopping sequences within 100ms period, considering the random hopping behavior, maximum 2 hops can be possibly observed within the period. $[100\text{ms} / 57.6\text{ms}] = 2 \text{ hops}$

Thus, the maximum possible ON time:

$$2.90 \text{ ms} \times 2 = 5.80 \text{ ms}$$

Worst case Duty Cycle Correction factor, which is derived from the maximum possible ON time,

$$20 \times \log(5.80 \text{ ms}/100\text{ms}) = -24.73 \text{ dB}$$

3.8.7 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix A and B.

3.8.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix A and B.

3.9 AC Conducted Emission Measurement

3.9.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

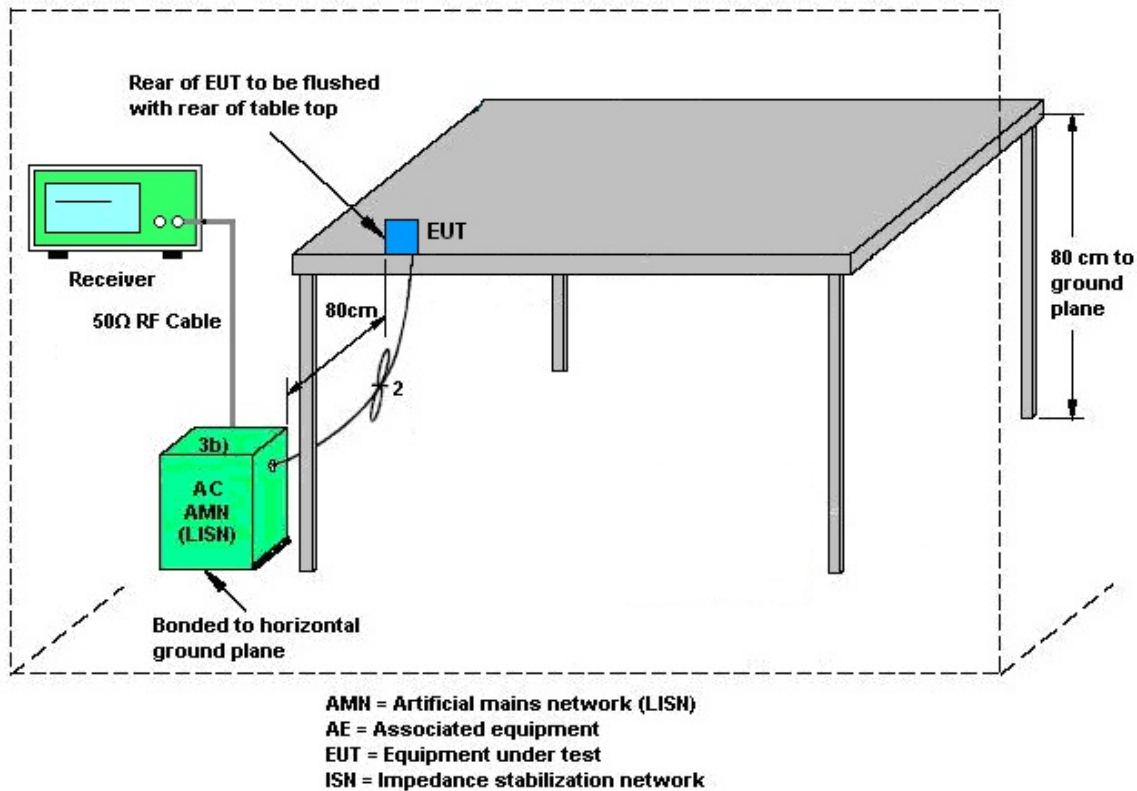
3.9.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.9.3 Test Procedures

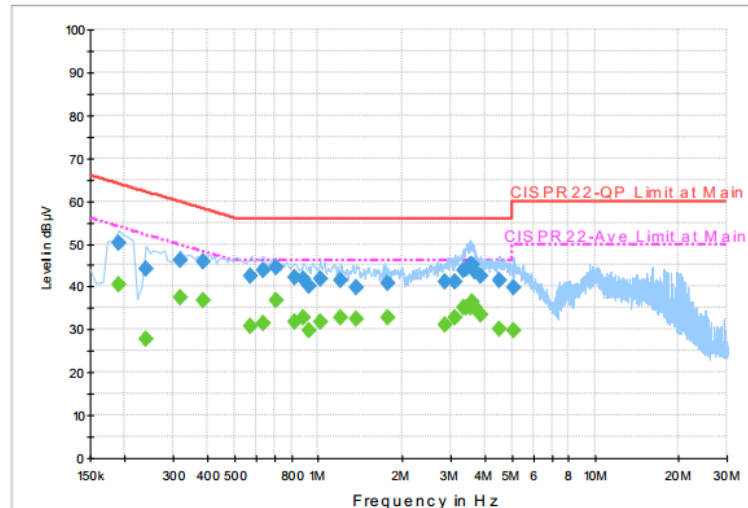
1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.9.4 Test Setup



3.9.5 Test Result of AC Conducted Emission

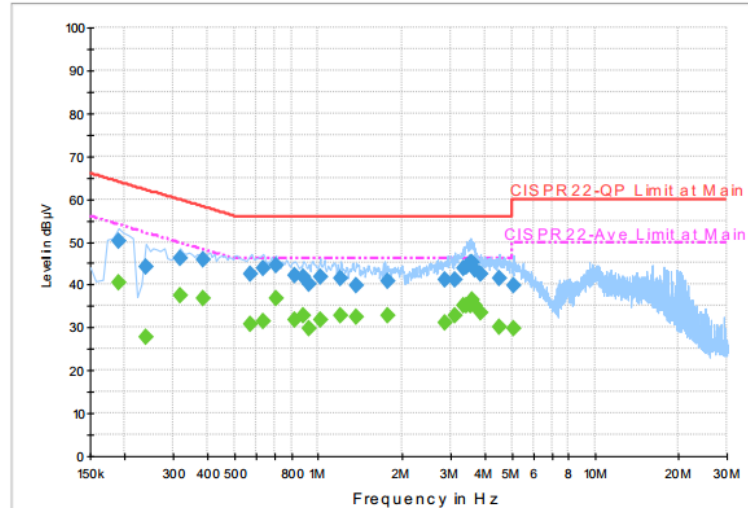
Test Mode :	Mode 1	Temperature :	21~23℃
Test Engineer :	Arthur Hsieh	Relative Humidity :	51~53%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	Bluetooth Link + WLAN (2.4GHz) Link + Scanner + MPEG4 + Snap-on 1 + RJ-45 Cable Link with Notebook + Adapter + SD Card for Sample 4		



Final Result : Quasi-Peak

Frequency (MHz)	Quasi-Peak (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.190000	50.1	Off	L1	19.6	13.9	64.0
0.238000	44.2	Off	L1	19.6	18.0	62.2
0.318000	46.0	Off	L1	19.6	13.8	59.8
0.382000	45.7	Off	L1	19.6	12.5	58.2
0.566000	42.5	Off	L1	19.6	13.5	56.0
0.630000	44.0	Off	L1	19.5	12.0	56.0
0.702000	44.6	Off	L1	19.6	11.4	56.0
0.822000	42.1	Off	L1	19.6	13.9	56.0
0.886000	41.9	Off	L1	19.6	14.1	56.0
0.926000	40.0	Off	L1	19.6	16.0	56.0
1.014000	41.7	Off	L1	19.6	14.3	56.0
1.206000	41.4	Off	L1	19.6	14.6	56.0
1.366000	39.8	Off	L1	19.6	16.2	56.0
1.782000	40.6	Off	L1	19.6	15.4	56.0
2.886000	41.0	Off	L1	19.4	15.0	56.0
3.118000	41.1	Off	L1	19.5	14.9	56.0
3.342000	43.8	Off	L1	19.5	12.2	56.0
3.438000	44.1	Off	L1	19.5	11.9	56.0
3.566000	45.1	Off	L1	19.5	10.9	56.0
3.606000	45.3	Off	L1	19.5	10.7	56.0
3.678000	43.5	Off	L1	19.6	12.5	56.0
3.854000	42.4	Off	L1	19.6	13.6	56.0
4.526000	41.4	Off	L1	19.6	14.6	56.0
5.070000	39.9	Off	L1	19.6	20.1	60.0

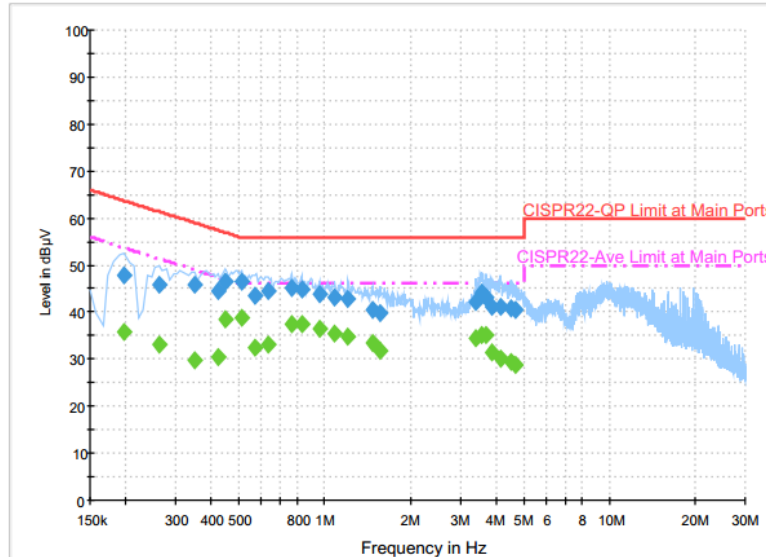
Test Mode :	Mode 1	Temperature :	21~23°C
Test Engineer :	Arthur Hsieh	Relative Humidity :	51~53%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	Bluetooth Link + WLAN (2.4GHz) Link + Scanner + MPEG4 + Snap-on 1 + RJ-45 Cable Link with Notebook + Adapter + SD Card for Sample 4		


Final Result : Average

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.190000	40.4	Off	L1	19.6	13.6	54.0
0.238000	27.9	Off	L1	19.6	24.3	52.2
0.318000	37.4	Off	L1	19.6	12.4	49.8
0.382000	36.8	Off	L1	19.6	11.4	48.2
0.566000	30.8	Off	L1	19.6	15.2	46.0
0.630000	31.3	Off	L1	19.5	14.7	46.0
0.702000	36.7	Off	L1	19.6	9.3	46.0
0.822000	31.8	Off	L1	19.6	14.2	46.0
0.886000	32.7	Off	L1	19.6	13.3	46.0
0.926000	29.8	Off	L1	19.6	16.2	46.0
1.014000	31.9	Off	L1	19.6	14.1	46.0
1.206000	32.9	Off	L1	19.6	13.1	46.0
1.366000	32.5	Off	L1	19.6	13.5	46.0
1.782000	32.8	Off	L1	19.6	13.2	46.0
2.886000	31.2	Off	L1	19.4	14.8	46.0
3.118000	32.8	Off	L1	19.5	13.2	46.0
3.342000	35.0	Off	L1	19.5	11.0	46.0
3.438000	35.1	Off	L1	19.5	10.9	46.0
3.566000	35.1	Off	L1	19.5	10.9	46.0
3.606000	36.3	Off	L1	19.5	9.7	46.0
3.678000	35.1	Off	L1	19.6	10.9	46.0
3.854000	33.5	Off	L1	19.6	12.5	46.0
4.526000	30.0	Off	L1	19.6	16.0	46.0
5.070000	29.8	Off	L1	19.6	20.2	50.0



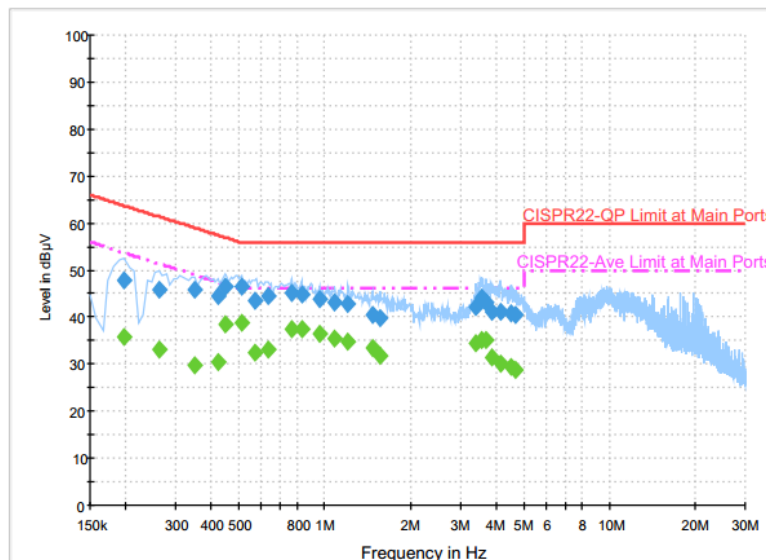
Test Mode :	Mode 1	Temperature :	21~23°C
Test Engineer :	Arthur Hsieh	Relative Humidity :	51~53%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	Bluetooth Link + WLAN (2.4GHz) Link + Scanner + MPEG4 + Snap-on 1 + RJ-45 Cable Link with Notebook + Adapter + SD Card for Sample 4		

**Final Result : Quasi-Peak**

Frequency (MHz)	Quasi-Peak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.198000	47.8	Off	N	19.5	15.9	63.7
0.262000	45.8	Off	N	19.5	15.6	61.4
0.350000	45.7	Off	N	19.5	13.3	59.0
0.422000	44.4	Off	N	19.5	13.0	57.4
0.446000	46.4	Off	N	19.5	10.5	56.9
0.510000	46.6	Off	N	19.5	9.4	56.0
0.566000	43.6	Off	N	19.5	12.4	56.0
0.630000	44.5	Off	N	19.5	11.5	56.0
0.766000	45.1	Off	N	19.6	10.9	56.0
0.830000	44.8	Off	N	19.5	11.2	56.0
0.958000	43.8	Off	N	19.5	12.2	56.0
1.086000	43.0	Off	N	19.6	13.0	56.0
1.206000	42.9	Off	N	19.6	13.1	56.0
1.470000	40.5	Off	N	19.6	15.5	56.0
1.566000	39.9	Off	N	19.6	16.1	56.0
3.406000	42.2	Off	N	19.5	13.8	56.0
3.574000	44.3	Off	N	19.5	11.7	56.0
3.702000	43.3	Off	N	19.5	12.7	56.0
3.886000	41.2	Off	N	19.6	14.8	56.0
4.134000	41.2	Off	N	19.6	14.8	56.0
4.534000	40.7	Off	N	19.6	15.3	56.0
4.694000	40.4	Off	N	19.6	15.6	56.0



Test Mode :	Mode 1	Temperature :	21~23°C
Test Engineer :	Arthur Hsieh	Relative Humidity :	51~53%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	Bluetooth Link + WLAN (2.4GHz) Link + Scanner + MPEG4 + Snap-on 1 + RJ-45 Cable Link with Notebook + Adapter + SD Card for Sample 4		

**Final Result : Average**

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.198000	35.8	Off	N	19.5	17.9	53.7
0.262000	33.1	Off	N	19.5	18.3	51.4
0.350000	29.8	Off	N	19.5	19.2	49.0
0.422000	30.5	Off	N	19.5	16.9	47.4
0.446000	38.4	Off	N	19.5	8.5	46.9
0.510000	38.8	Off	N	19.5	7.2	46.0
0.566000	32.3	Off	N	19.5	13.7	46.0
0.630000	33.1	Off	N	19.5	12.9	46.0
0.766000	37.3	Off	N	19.6	8.7	46.0
0.830000	37.4	Off	N	19.5	8.6	46.0
0.958000	36.6	Off	N	19.5	9.4	46.0
1.086000	35.6	Off	N	19.6	10.4	46.0
1.206000	34.7	Off	N	19.6	11.3	46.0
1.470000	33.4	Off	N	19.6	12.6	46.0
1.566000	31.8	Off	N	19.6	14.2	46.0
3.406000	34.5	Off	N	19.5	11.5	46.0
3.574000	35.1	Off	N	19.5	10.9	46.0
3.702000	35.0	Off	N	19.5	11.0	46.0
3.886000	31.5	Off	N	19.6	14.5	46.0
4.134000	30.2	Off	N	19.6	15.8	46.0
4.534000	29.5	Off	N	19.6	16.5	46.0
4.694000	28.8	Off	N	19.6	17.2	46.0



3.10 Antenna Requirements

3.10.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.10.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.10.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Power Meter	Agilent	E4416A	GB41292344	300MHz~40GHz	Dec. 26, 2016	Jan. 11, 2017 ~ Jan. 26, 2017	Dec. 25, 2017	Conducted (TH05-HY)
Power Sensor	Agilent	E9327A	US40441548	300MHz~40GHz	Dec. 26, 2016	Jan. 11, 2017 ~ Jan. 26, 2017	Dec. 25, 2017	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP40	100055	9kHz-40GHz	Jul. 17, 2016	Jan. 11, 2017 ~ Jan. 26, 2017	Jul. 16, 2017	Conducted (TH05-HY)
BT Base Station (Measure)	Rohde & Schwarz	CBT	101136	BT 3.0	Sep. 21, 2016	Jan. 11, 2017 ~ Jan. 26, 2017	Sep. 20, 2017	Conducted (TH05-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Jan. 17, 2017	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESCI 7	100724	9kHz~7GHz	Aug. 30, 2016	Jan. 17, 2017	Aug. 29, 2017	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Nov. 29, 2016	Jan. 17, 2017	Nov. 28, 2017	Conduction (CO05-HY)
Amplifier	SONOMA	310N	187312	9kHz~1GHz	Nov. 10, 2016	Jan. 26, 2017 ~ Feb. 02, 2017	Nov. 09, 2017	Radiation (03CH11-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Sep. 02, 2015	Jan. 26, 2017 ~ Feb. 02, 2017	Sep. 01, 2017	Radiation (03CH11-HY)
Bilog Antenna	TESEQ	CBL 6111D	35414	30MHz~1GHz	Oct. 15, 2016	Jan. 26, 2017 ~ Feb. 02, 2017	Oct. 14, 2017	Radiation (03CH11-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1522	1GHz ~ 18GHz	Mar. 30, 2016	Jan. 26, 2017 ~ Feb. 02, 2017	Mar. 31, 2017	Radiation (03CH11-HY)
Preamplifier	Keysight	83017A	MY53270080	1GHz~26.5GHz	Nov. 10, 2016	Jan. 26, 2017 ~ Feb. 02, 2017	Nov. 09, 2017	Radiation (03CH11-HY)
Spectrum Analyzer	Keysight	N9010A	MY52350276	10Hz ~ 44GHZ	Mar. 21, 2016	Jan. 26, 2017 ~ Feb. 02, 2017	Mar. 20, 2017	Radiation (03CH11-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1~4m	N/A	Jan. 26, 2017 ~ Feb. 02, 2017	N/A	Radiation (03CH11-HY)
Turn Table	EMEC	TT 2000	N/A	0~360 Degree	N/A	Jan. 26, 2017 ~ Feb. 02, 2017	N/A	Radiation (03CH11-HY)
Preamplifier	MITEQ	TTA0204	1872107	2GHz~40GHz	Feb. 15, 2016	Jan. 26, 2017 ~ Feb. 02, 2017	Feb. 14, 2017	Radiation (03CH11-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170584	18GHz- 40GHz	Nov. 08, 2016	Jan. 26, 2017 ~ Feb. 02, 2017	Nov. 07, 2017	Radiation (03CH11-HY)



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.7
--	-----

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.2
--	-----

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.5
--	-----

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.2
--	-----



Appendix A. Radiated Spurious Emission

Test Engineer :	Jacky Hung and Ken Wu	Temperature :	20~24°C
		Relative Humidity :	50~54%

2.4GHz 2400~2483.5MHz

BT (Band Edge @ 3m)

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BT CH00 2402MHz		2363.34	44.22	-29.78	74	41.91	27.09	8.82	33.6	284	336	P	H
		2363.34	19.49	-34.51	54	-	-	-	-	-	-	A	H
	*	2402	101.01	-	-	98.52	27.19	8.89	33.59	284	336	P	H
	*	2402	76.28	-	-	-	-	-	-	-	-	A	H
													H
													H
		2370.375	44.61	-29.39	74	42.25	27.14	8.82	33.6	220	353	P	V
		2370.375	19.88	-34.12	54	-	-	-	-	-	-	A	V
	*	2402	104.81	-	-	102.32	27.19	8.89	33.59	220	353	P	V
	*	2402	80.08	-	-	-	-	-	-	-	-	A	V
													V
													V
BT CH 39 2441MHz		2389.52	44.4	-29.6	74	41.92	27.19	8.89	33.6	251	335	P	H
		2389.52	19.67	-34.33	54	-	-	-	-	-	-	A	H
	*	2441	99.58	-	-	96.88	27.34	8.94	33.58	251	335	P	H
	*	2441	74.85	-	-	-	-	-	-	-	-	A	H
		2490.62	44.64	-29.36	74	41.74	27.5	8.98	33.58	251	335	P	H
		2490.62	19.91	-34.09	54	-	-	-	-	-	-	A	H
		2389.38	44.29	-29.71	74	41.81	27.19	8.89	33.6	220	356	P	V
		2389.38	19.56	-34.44	54	-	-	-	-	-	-	A	V
	*	2441	105.47	-	-	102.77	27.34	8.94	33.58	220	356	P	V
	*	2441	80.74	-	-	-	-	-	-	-	-	A	V
		2495.8	44.3	-29.7	74	41.39	27.5	8.98	33.57	220	356	P	V
		2495.8	19.57	-34.43	54	-	-	-	-	-	-	A	V



BT CH 78 2480MHz	*	2480	98.07	-	-	95.22	27.45	8.98	33.58	241	335	P	H
	*	2480	73.34	-	-	-	-	-	-	-	-	A	H
		2483.52	46.08	-27.92	74	43.23	27.45	8.98	33.58	241	335	P	H
		2483.52	21.35	-32.65	54	-	-	-	-	-	-	A	H
													H
													H
	*	2480	105.25	-	-	102.4	27.45	8.98	33.58	208	329	P	V
	*	2480	80.52	-	-	-	-	-	-	-	-	A	V
		2484.2	49.63	-24.37	74	46.78	27.45	8.98	33.58	208	329	P	V
		2484.2	24.9	-29.1	54	-	-	-	-	-	-	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

BT (Harmonic @ 3m)

BT	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BT CH 00 2402MHz		4804	32.36	-41.64	74	41.14	31.66	10.65	51.09	100	0	P	H
		4804	7.63	-46.37	54	-	-	-	-	-	-	A	H
													H
													H
		4804	32.06	-41.94	74	40.84	31.66	10.65	51.09	100	0	P	V
		4804	7.33	-46.67	54	-	-	-	-	-	-	A	V
													V
													V
BT CH 39 2441MHz		4882	32.62	-41.38	74	41.02	31.78	10.88	51.06	100	0	P	H
		4882	7.89	-46.11	54	-	-	-	-	-	-	A	H
		7323	37.68	-36.32	74	38.11	37.29	12.79	50.51	100	0	P	H
		7323	12.95	-41.05	54	-	-	-	-	-	-	A	H
		4882	32.36	-41.64	74	40.76	31.78	10.88	51.06	100	0	P	V
		4882	7.63	-46.37	54	-	-	-	-	-	-	A	V
		7323	38.2	-35.8	74	38.63	37.29	12.79	50.51	100	0	P	V
		7323	13.47	-40.53	54	-	-	-	-	-	-	A	V
BT CH 78 2480MHz		4960	33.51	-40.49	74	41.48	31.94	11.12	51.03	100	0	P	H
		4960	8.78	-45.22	54	-	-	-	-	-	-	A	H
		7440	38.23	-35.77	74	38.42	37.44	12.88	50.51	100	0	P	H
		7440	13.5	-40.5	54	-	-	-	-	-	-	A	H
		4960	33.33	-40.67	74	41.3	31.94	11.12	51.03	100	0	P	V
		4960	8.6	-45.4	54	-	-	-	-	-	-	A	V
		7440	38.09	-35.91	74	38.28	37.44	12.88	50.51	100	0	P	V
		7440	13.36	-40.64	54	-	-	-	-	-	-	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

2.4GHz BT (LF)

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz BT LF		30.27	25.02	-14.98	40	30.53	25.7	1.29	32.5	-	-	P	H
		84.81	25.8	-14.2	40	42.47	14.3	1.51	32.48	-	-	P	H
		138	23	-20.5	43.5	35.94	17.92	1.78	32.64	-	-	P	H
		345.5	30.42	-15.58	46	39.02	20.97	2.78	32.35	-	-	P	H
		447	34.36	-11.64	46	40.35	23.25	3.11	32.35	100	58	P	H
		959.4	34.15	-11.85	46	30	30.58	4.69	31.12	-	-	P	H
													H
													H
													H
													H
													H
													H
		30.81	36.56	-3.44	40	42.58	25.18	1.29	32.49	100	321	P	V
		82.92	33.74	-6.26	40	50.65	14.06	1.51	32.48	-	-	P	V
		189.84	26.07	-17.43	43.5	41.52	15.3	2.1	32.85	-	-	P	V
		459.6	30.94	-15.06	46	36.74	23.45	3.11	32.36	-	-	P	V
		600.3	31.63	-14.37	46	34.72	25.7	3.67	32.46	-	-	P	V
		944	33.24	-12.76	46	29.37	30.44	4.69	31.26	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Level(dBμV/m) =

Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)

= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



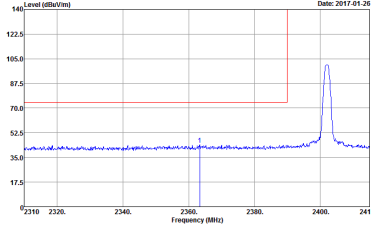
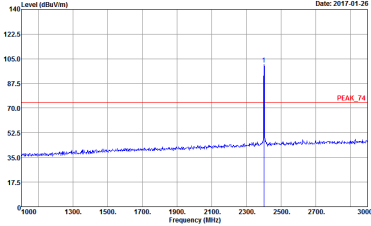
Appendix B. Radiated Spurious Emission Plots

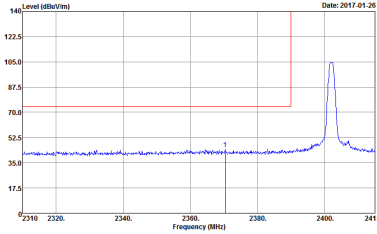
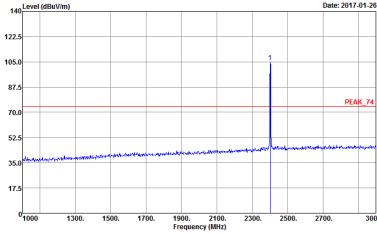
Test Engineer :	Jacky Hung and Ken Wu	Temperature :	20~24°C
		Relative Humidity :	50~54%

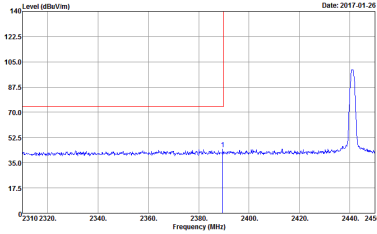
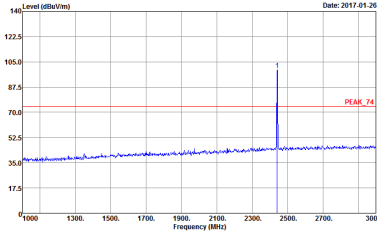
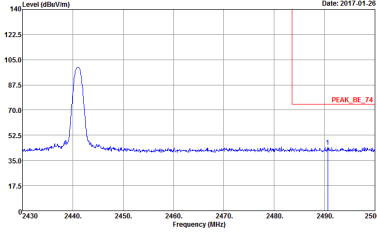
Note symbol

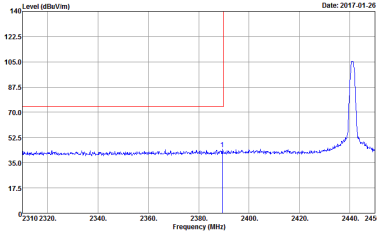
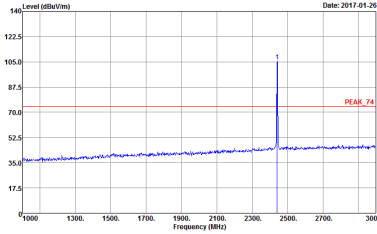
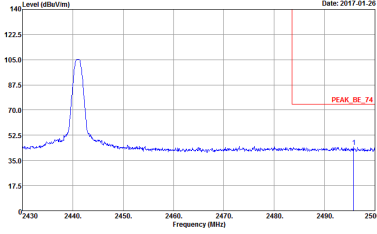
-L	Low channel location
-R	High channel location

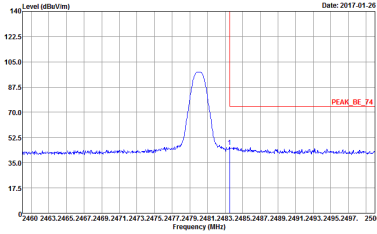
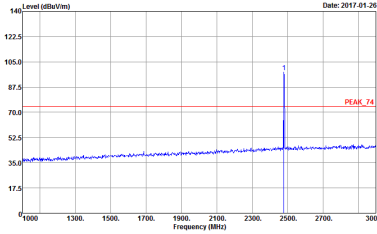
2.4GHz 2400~2483.5MHz
BT (Band Edge @ 3m)

BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH00 2402MHz	
1	Horizontal	Fundamental
Peak	 Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 9120D-HF HORIZONTAL Detector : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Project : 602819-01	 Site : 03CH11-HY Condition : PEAK_74 3m HORN 9120D-HF HORIZONTAL Detector : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Project : 602819-01

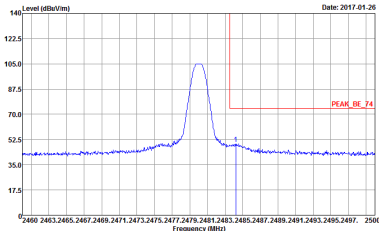
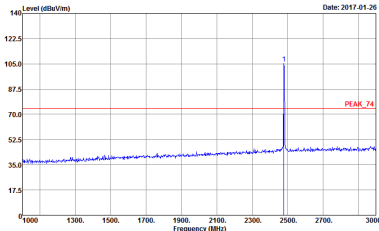
BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH00 2402MHz	
1	Vertical	Fundamental
Peak	 Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 6D2819-01	 Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 6D2819-01

BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH39 2441MHz	
1	Horizontal	Fundamental
Peak	 Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 6D2819-01	 Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 6D2819-01
Peak	 Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 6D2819-01	Left blank

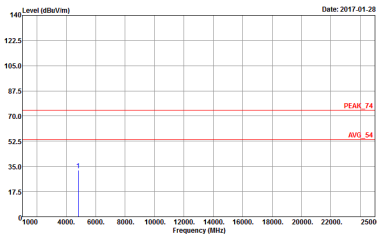
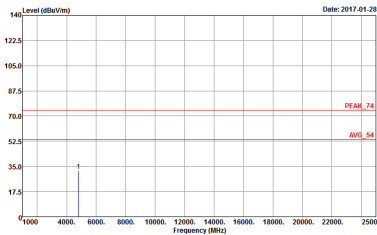
BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH39 2441MHz	
1	Vertical	Fundamental
Peak	 Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 6D2819-01	 Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 6D2819-01
Peak	 Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 6D2819-01	Left blank

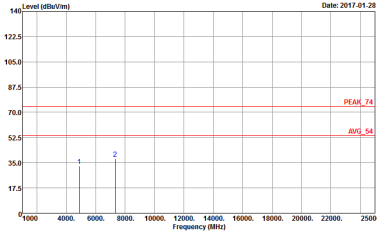
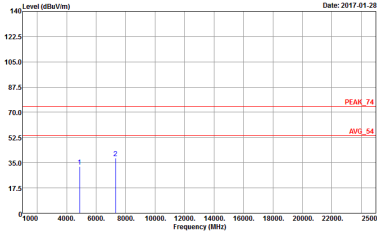
BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH78 2480MHz	
1	Horizontal	Fundamental
Peak	 Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 6D2819-01	 Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 6D2819-01

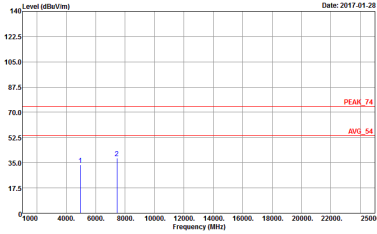
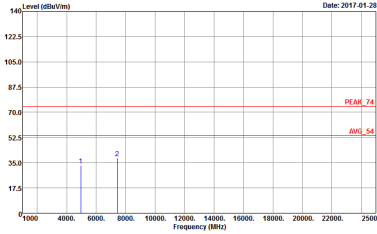


BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH78 2480MHz	
1	Vertical	Fundamental
Peak	 Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 6D2819-01	 Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 6D2819-01

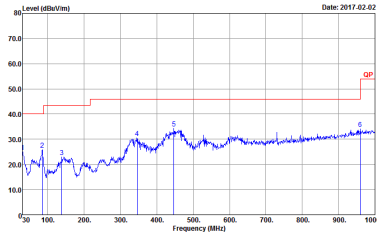
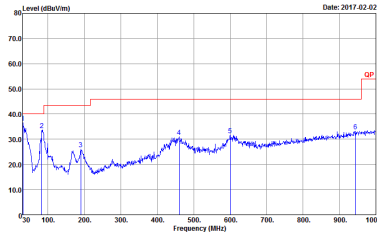
2.4GHz 2400~2483.5MHz
BT (Harmonic @ 3m)

BT	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BT CH00 2402MHz	
1	Horizontal	Vertical
Peak Avg.	 Site : 03CH11-4FY Condition : PEAK_74 3m 9170 SHF HORM_150809 HORIZONTAL Detector : Peak Project : 602819-01	 Site : 03CH11-4FY Condition : PEAK_74 3m 9170 SHF HORM_150809 VERTICAL Detector : Peak Project : 602819-01

BT	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BT CH39 2441MHz	
1	Horizontal	Vertical
Peak Avg.	 Site : 03CH11-HY Condition : PEAK_74 3m 9170 SHF HORM_150809 HORIZONTAL Detector : Peak Project : 602819-01	 Site : 03CH11-HY Condition : PEAK_74 3m 9170 SHF HORM_150809 VERTICAL Detector : Peak Project : 602819-01

BT	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BT CH78 2480MHz	
1	Horizontal	Vertical
Peak Avg.	 Site : 03CH11-HY Condition : PEAK_74 3m 9170 SHF HORM_150809 HORIZONTAL Detector : Peak Project : 602819-01	 Site : 03CH11-HY Condition : PEAK_74 3m 9170 SHF HORM_150809 VERTICAL Detector : Peak Project : 602819-01

Emission below 1GHz
2.4GHz BT (LF)

BT	2.4GHz 2400~2483.5MHz	
ANT	BT LF	
1	Horizontal	Vertical
QP / Peak	 Site : 03CH11-HY Condition : QP 3m BT-LOG 6111D-LF_ETC HORIZONTAL Project : 6D2819-02	 Site : 03CH11-HY Condition : QP 3m BT-LOG 6111D-LF_ETC VERTICAL Project : 6D2819-02