


Site	SIP-AC3	Test Date	2025-01-21
Temperature	15.9°C	Humidity	41.3%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE80 at 5210MHz		

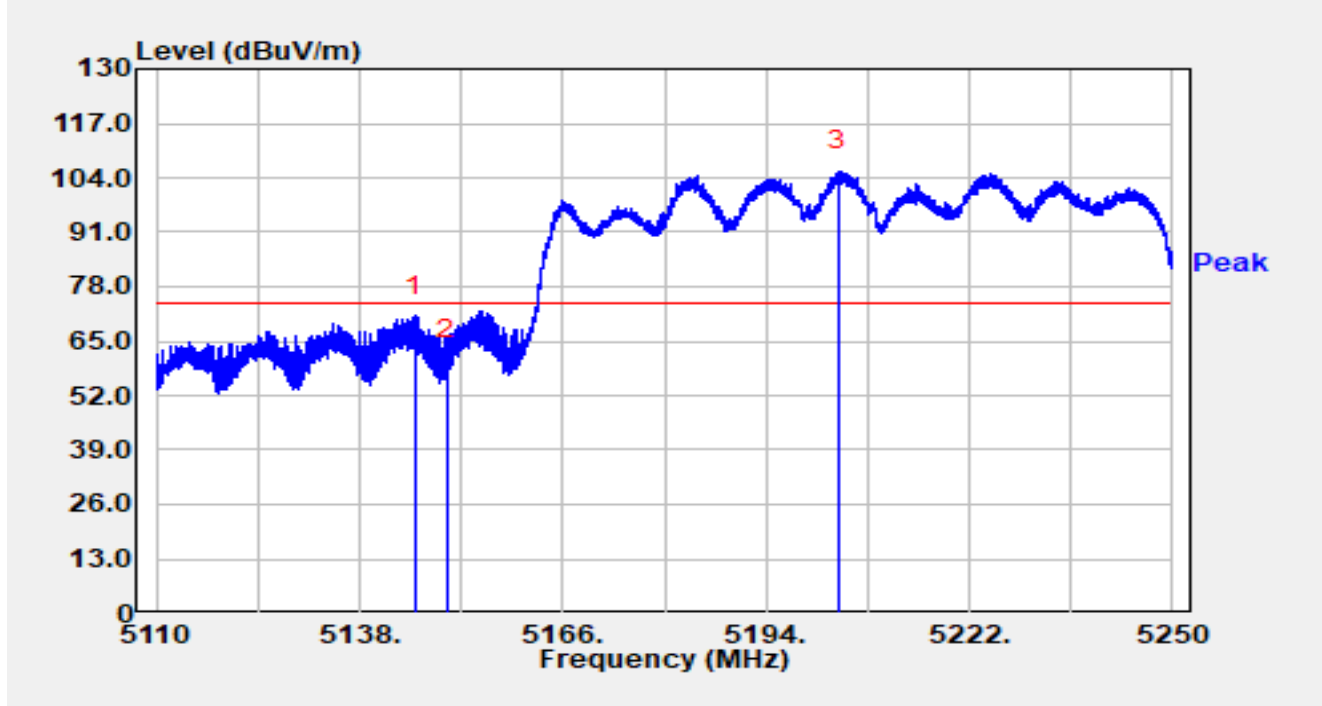


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5145.602	74.02	-2.95	71.07	-2.93	74.00	Peak
2		5150.000	62.71	-2.21	60.50	-13.50	74.00	Peak
3		5203.912	62.45	43.15	105.59	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	15.9°C	Humidity	41.3%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE80 at 5210MHz		

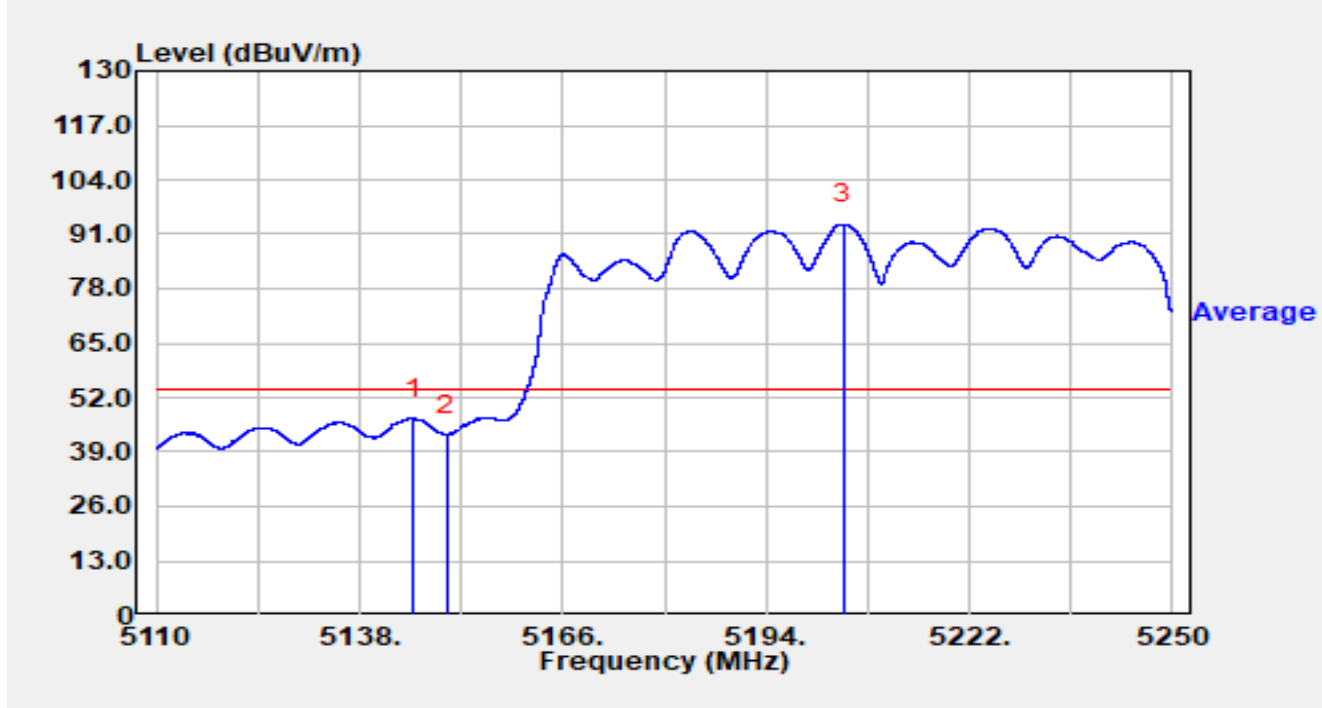


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5145.434	50.00	-2.97	47.03	-6.97	54.00	Average
2		5150.000	45.32	-2.21	43.11	-10.89	54.00	Average
3		5204.626	51.30	42.08	93.38	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	15.9°C	Humidity	41.3%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE80 at 5210MHz		

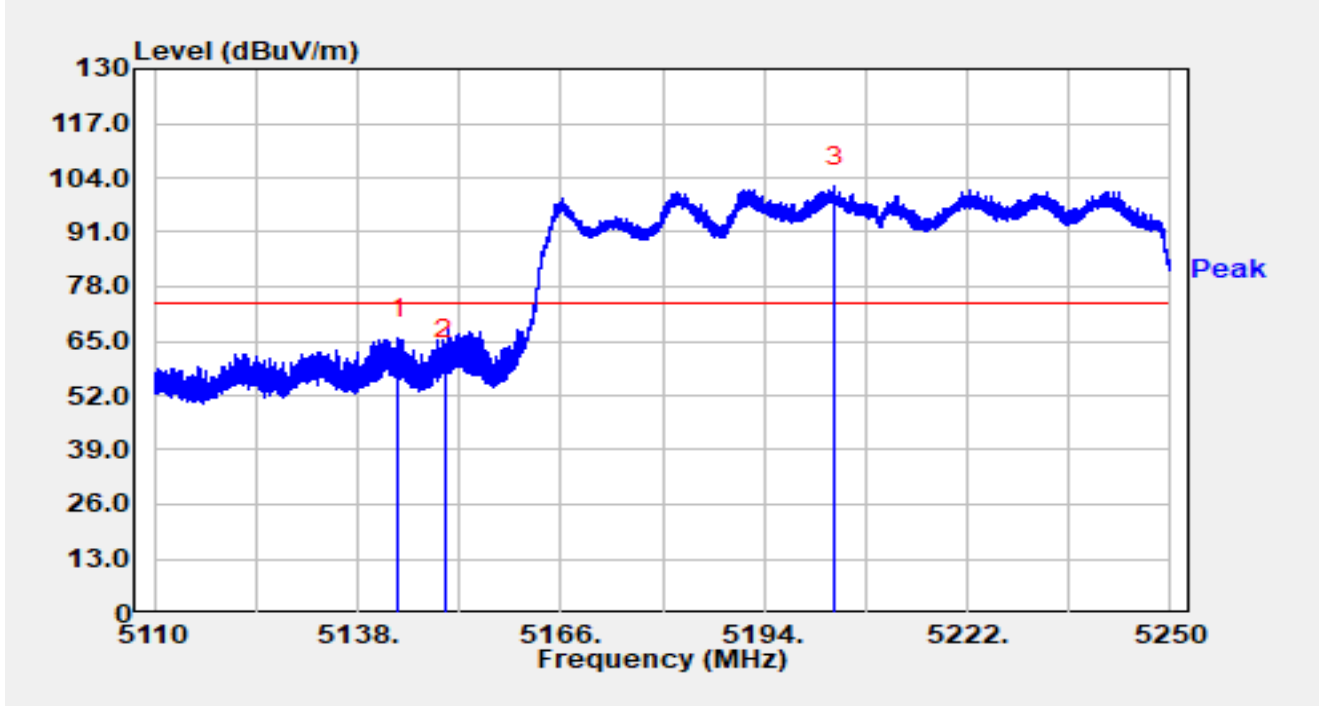


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5143.600	68.85	-3.18	65.67	-8.33	74.00	Peak
2		5150.000	62.89	-2.21	60.68	-13.32	74.00	Peak
3		5203.772	58.72	43.31	102.03	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	15.9°C	Humidity	41.3%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE80 at 5210MHz		

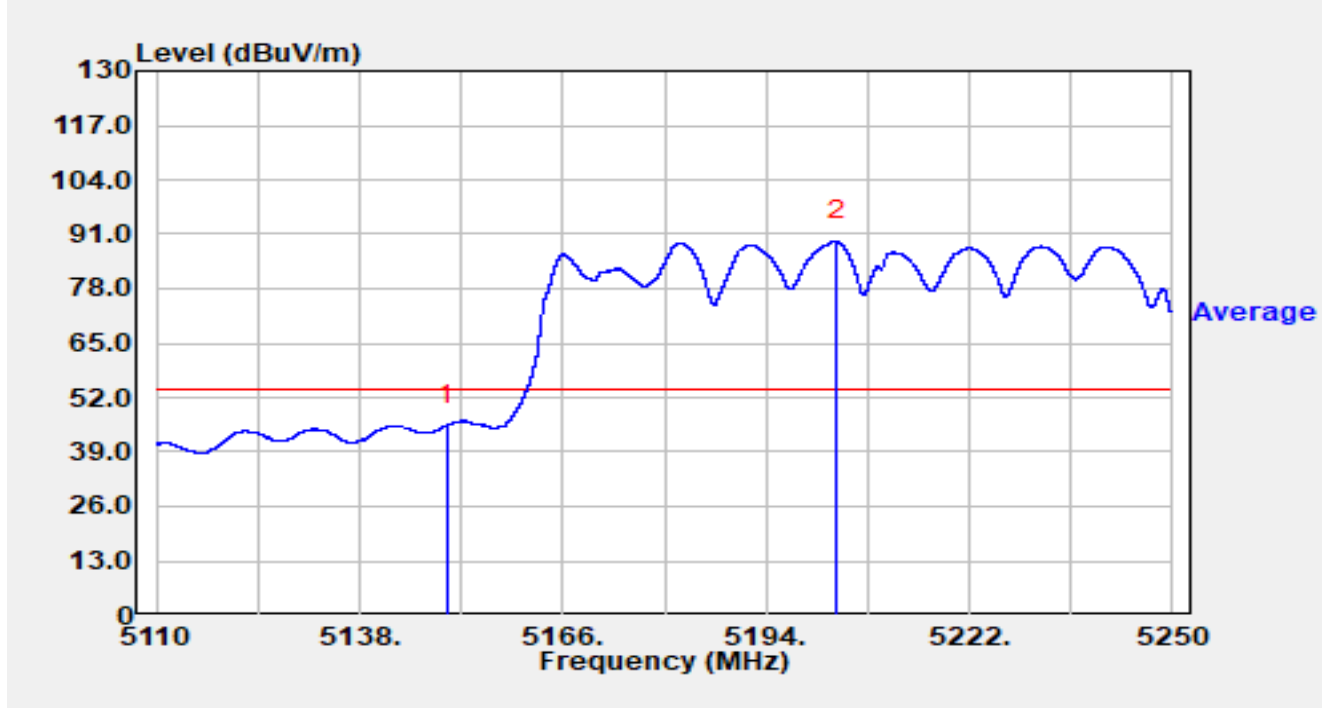


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.000	47.55	-2.21	45.34	-8.66	54.00	Average
2		5203.800	46.16	43.31	89.48	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	15.9°C	Humidity	41.3%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE80 at 5290MHz		

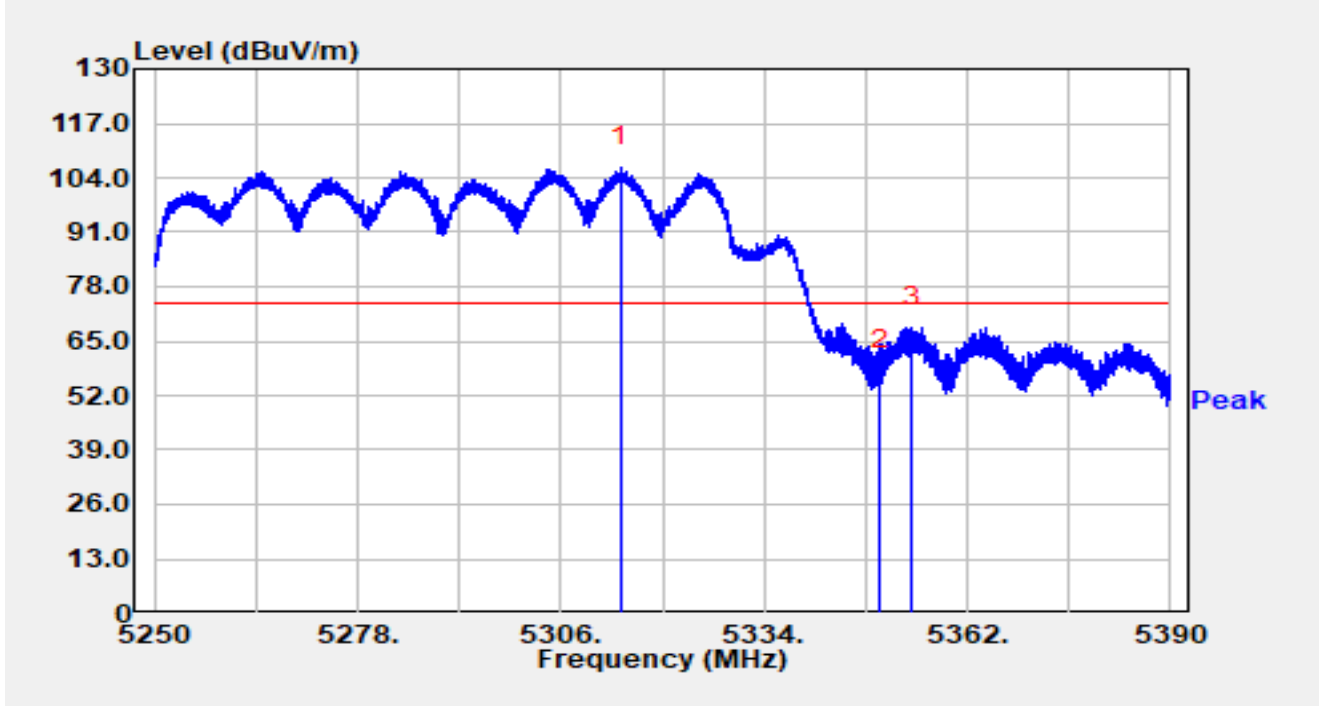


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5314.274	59.47	47.09	106.56	N/A	N/A	Peak
2		5350.000	59.30	-1.38	57.92	-16.08	74.00	Peak
3	*	5354.370	71.12	-2.90	68.21	-5.79	74.00	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	15.9°C	Humidity	41.3%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE80 at 5290MHz		

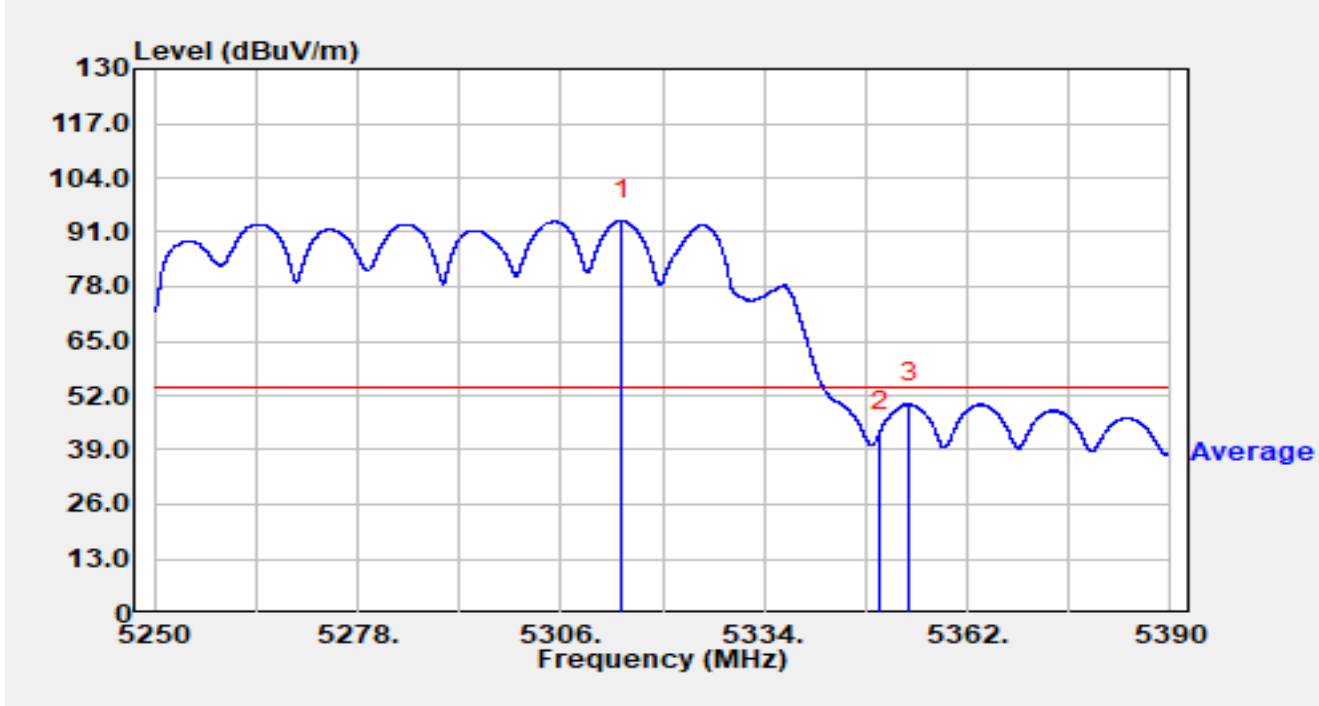


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5314.498	47.00	46.91	93.91	N/A	N/A	Average
2		5350.000	44.65	-1.38	43.27	-10.73	54.00	Average
3	*	5354.034	52.90	-2.85	50.06	-3.94	54.00	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	15.9°C	Humidity	41.3%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE80 at 5290MHz		

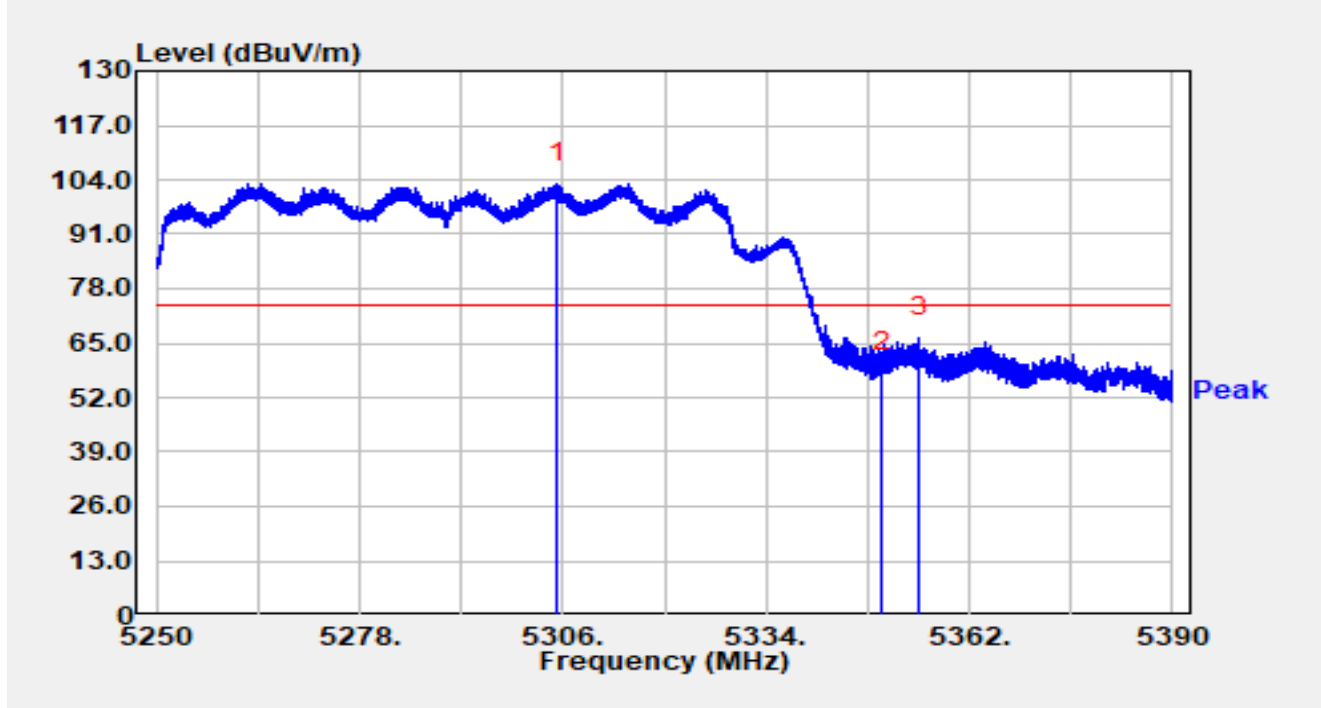


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5305.230	63.94	39.26	103.20	N/A	N/A	Peak
2		5350.000	59.48	-1.38	58.11	-15.89	74.00	Peak
3	*	5355.098	69.39	-3.01	66.37	-7.63	74.00	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	15.9°C	Humidity	41.3%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE80 at 5290MHz		

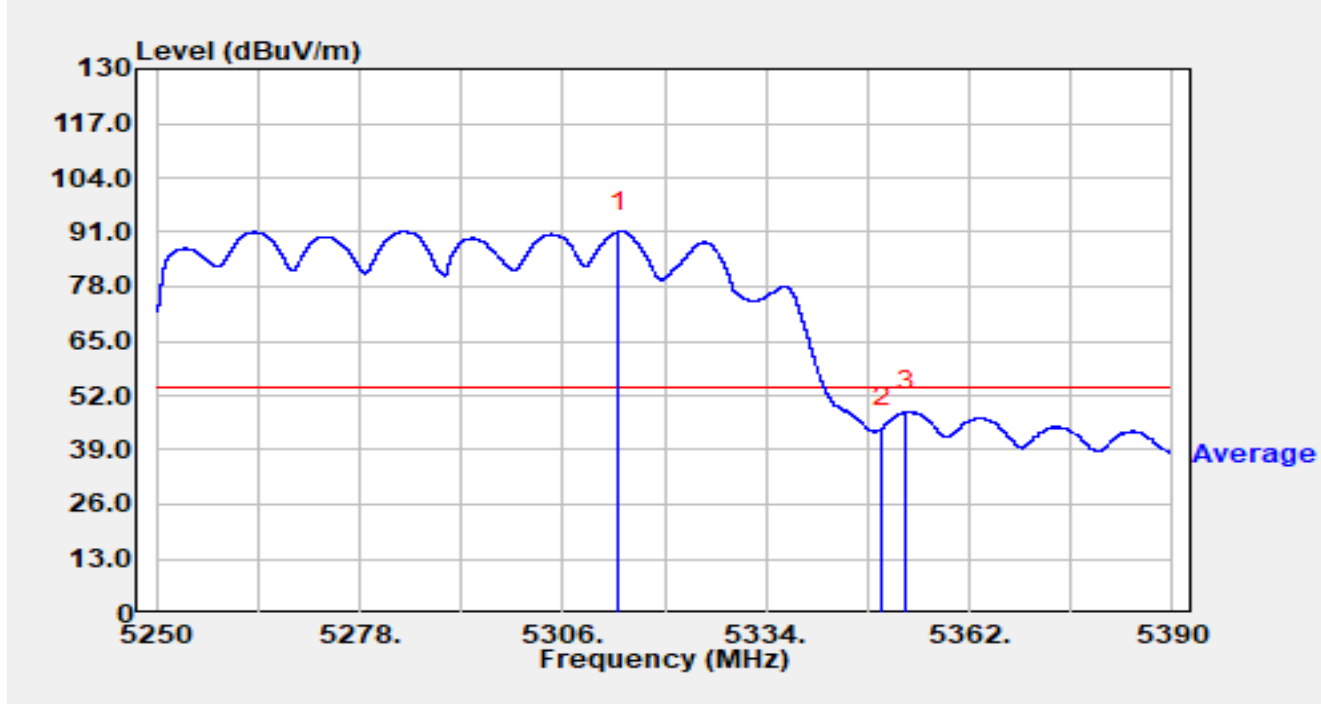


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5313.602	43.55	47.65	91.20	N/A	N/A	Average
2		5350.000	45.64	-1.38	44.26	-9.74	54.00	Average
3	*	5353.250	50.87	-2.64	48.24	-5.76	54.00	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	15.9°C	Humidity	41.3%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE80 at 5530MHz		

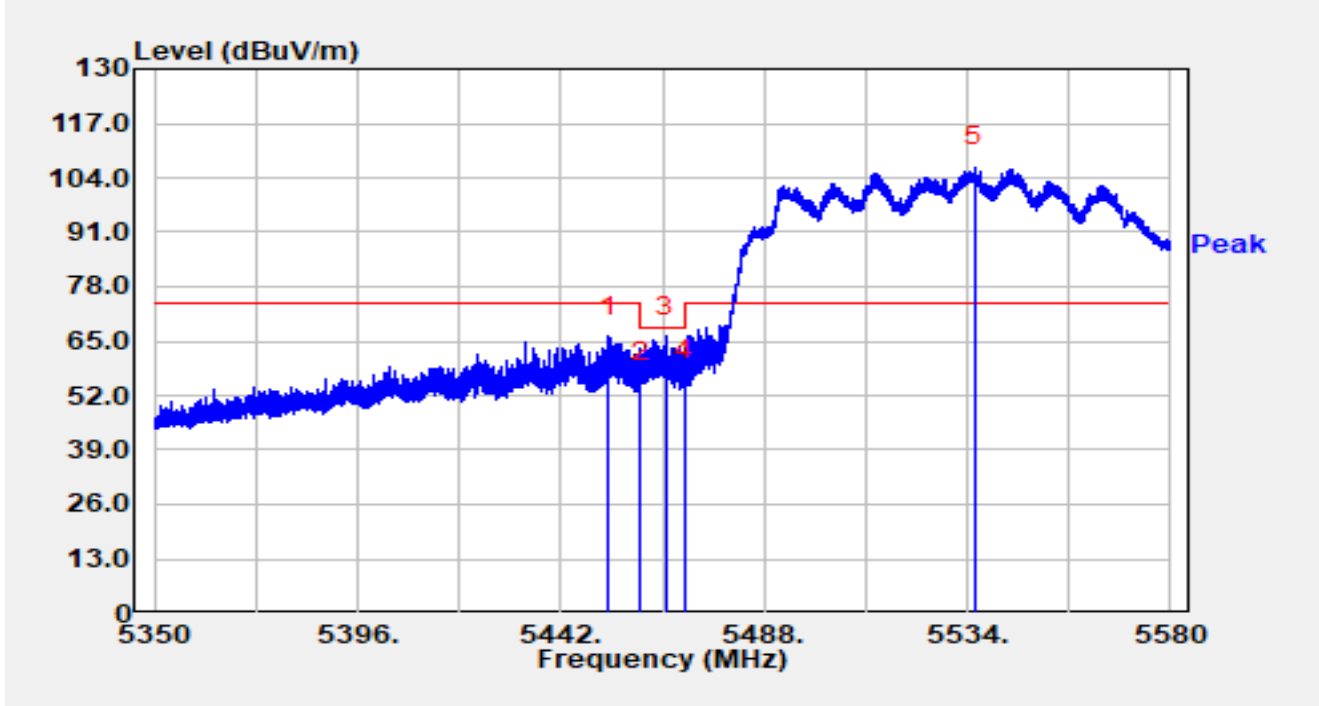


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5452.925	69.04	-3.04	66.00	-8.00	74.00	Peak
2		5460.000	57.67	-2.55	55.12	-13.08	68.20	Peak
3	*	5465.782	67.93	-1.91	66.02	-2.18	68.20	Peak
4		5470.000	56.30	-0.76	55.54	-12.66	68.20	Peak
5		5535.656	63.95	42.53	106.47	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	15.9°C	Humidity	41.3%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE80 at 5530MHz		

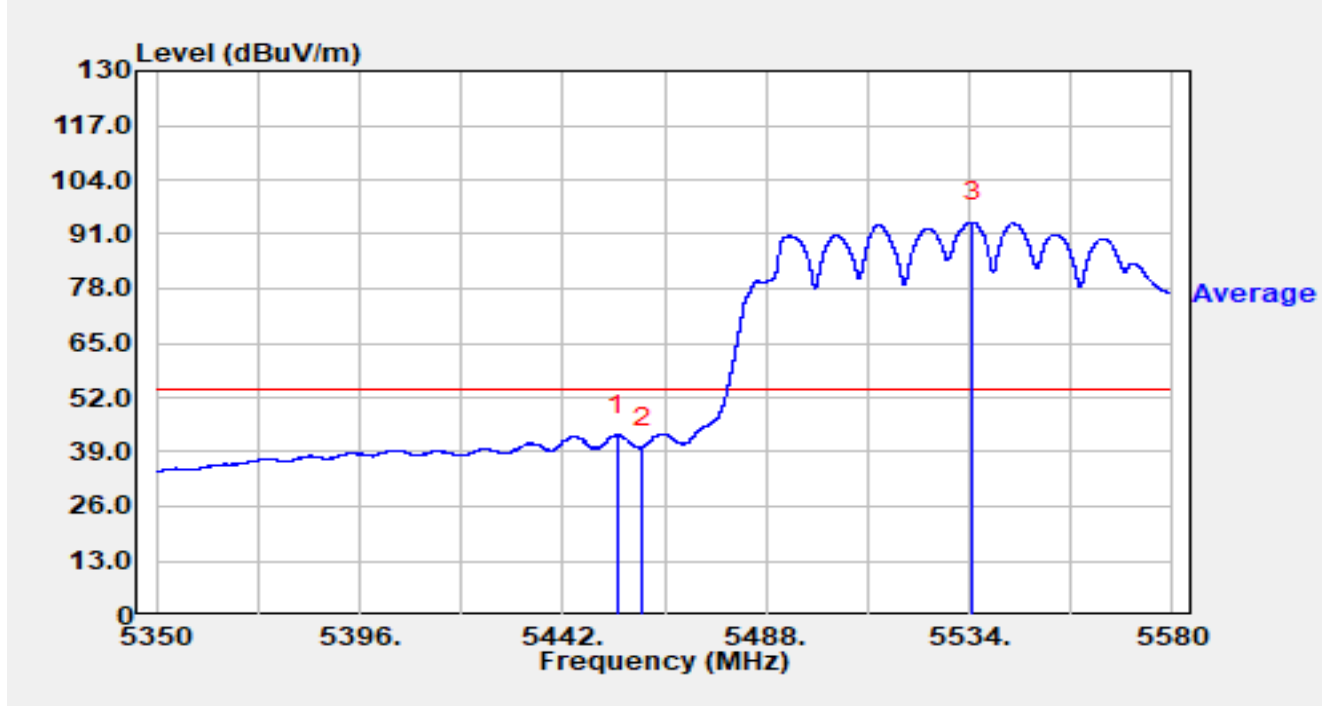


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5454.282	46.05	-2.98	43.08	-10.92	54.00	Average
2		5460.000	42.55	-2.55	40.00	-14.00	54.00	Average
3		5534.736	50.26	43.52	93.78	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	15.9°C	Humidity	41.3%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE80 at 5530MHz		

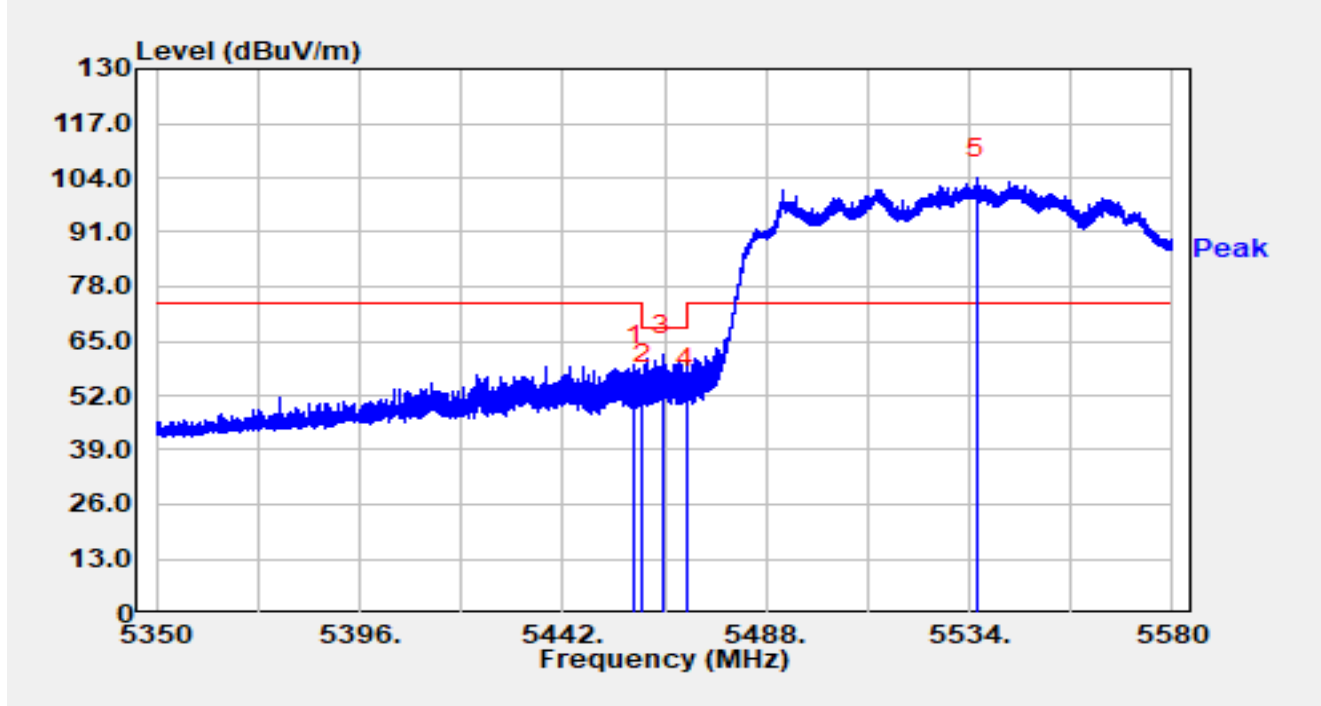


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5458.192	61.92	-2.69	59.23	-14.77	74.00	Peak
2		5460.000	57.38	-2.55	54.82	-13.38	68.20	Peak
3	*	5464.471	63.70	-2.12	61.57	-6.63	68.20	Peak
4		5470.000	54.42	-0.76	53.66	-14.54	68.20	Peak
5		5535.794	61.59	42.37	103.96	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	15.9°C	Humidity	41.3%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE80 at 5530MHz		

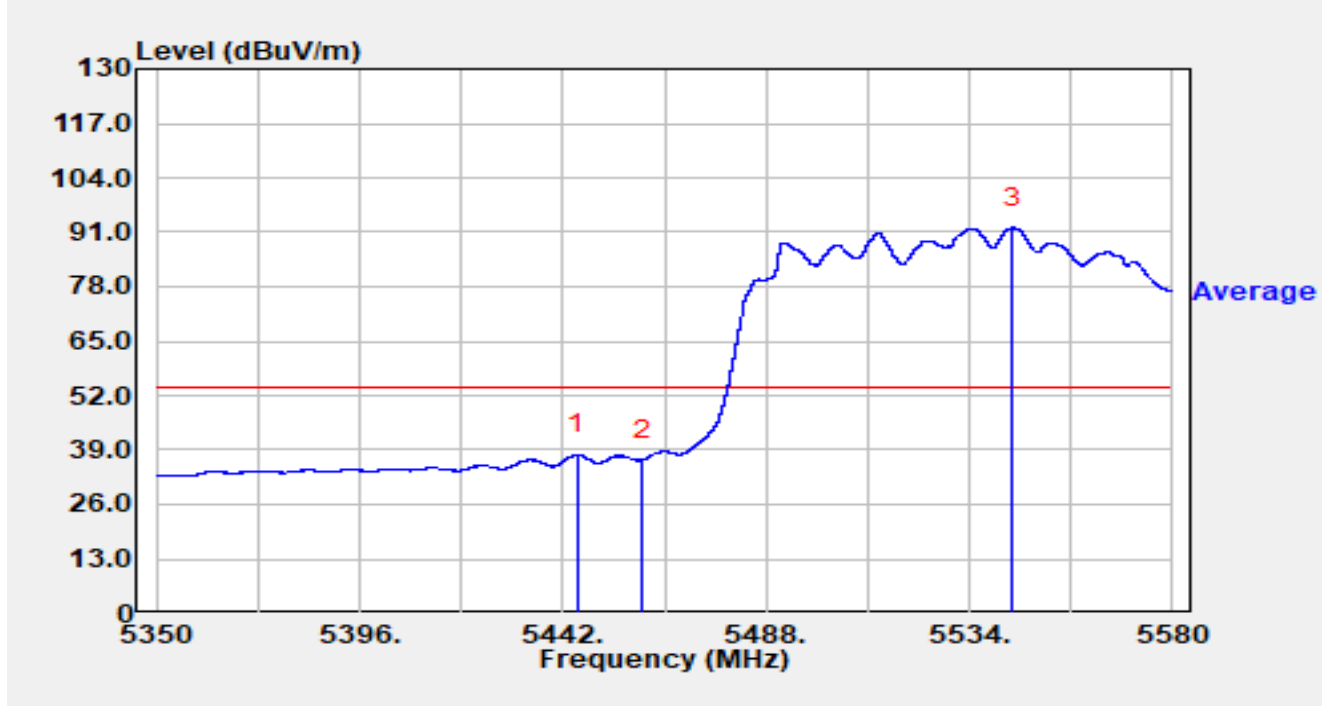


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5445.197	41.32	-3.38	37.94	-16.06	54.00	Average
2		5460.000	39.20	-2.55	36.65	-17.35	54.00	Average
3		5543.752	52.00	40.07	92.07	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	15.9°C	Humidity	41.3%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE80 at 5610MHz		

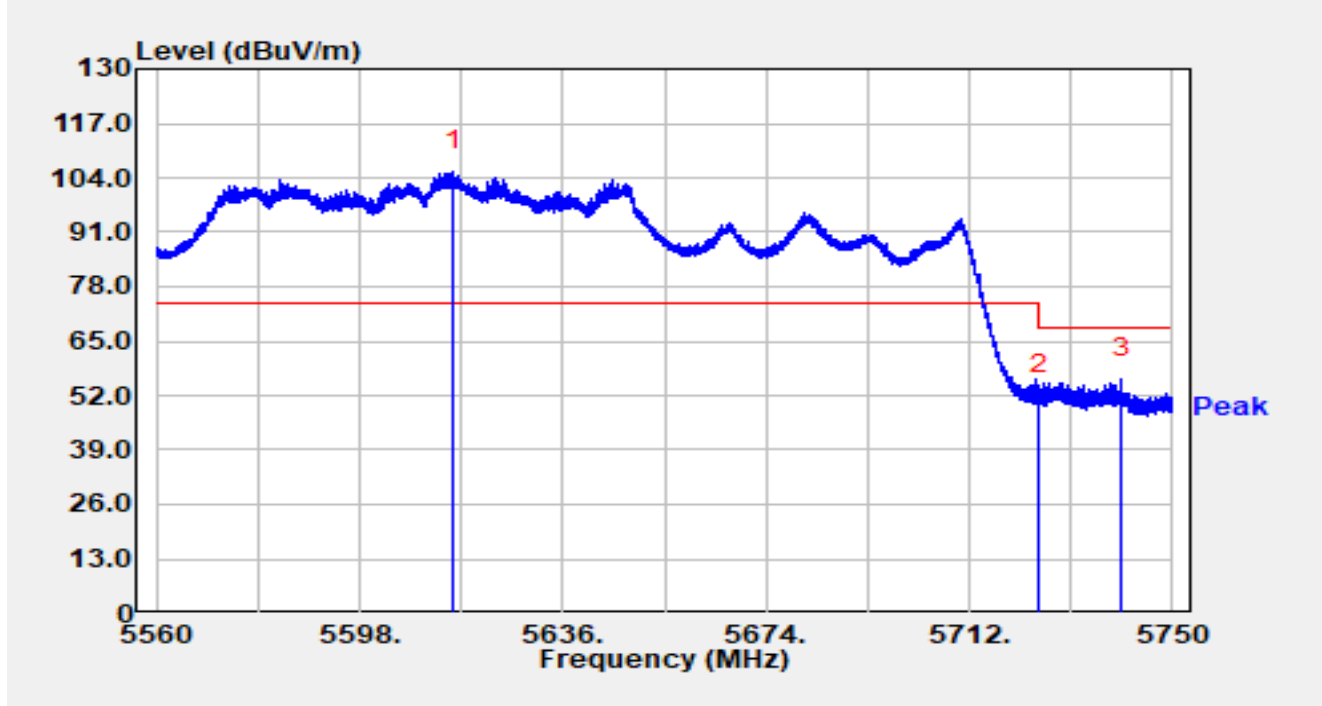


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5615.461	61.41	44.27	105.68	N/A	N/A	Peak
2		5725.000	53.25	-0.89	52.36	-15.84	68.20	Peak
3	*	5740.576	59.85	-3.69	56.17	-12.03	68.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	15.9°C	Humidity	41.3%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE80 at 5610MHz		

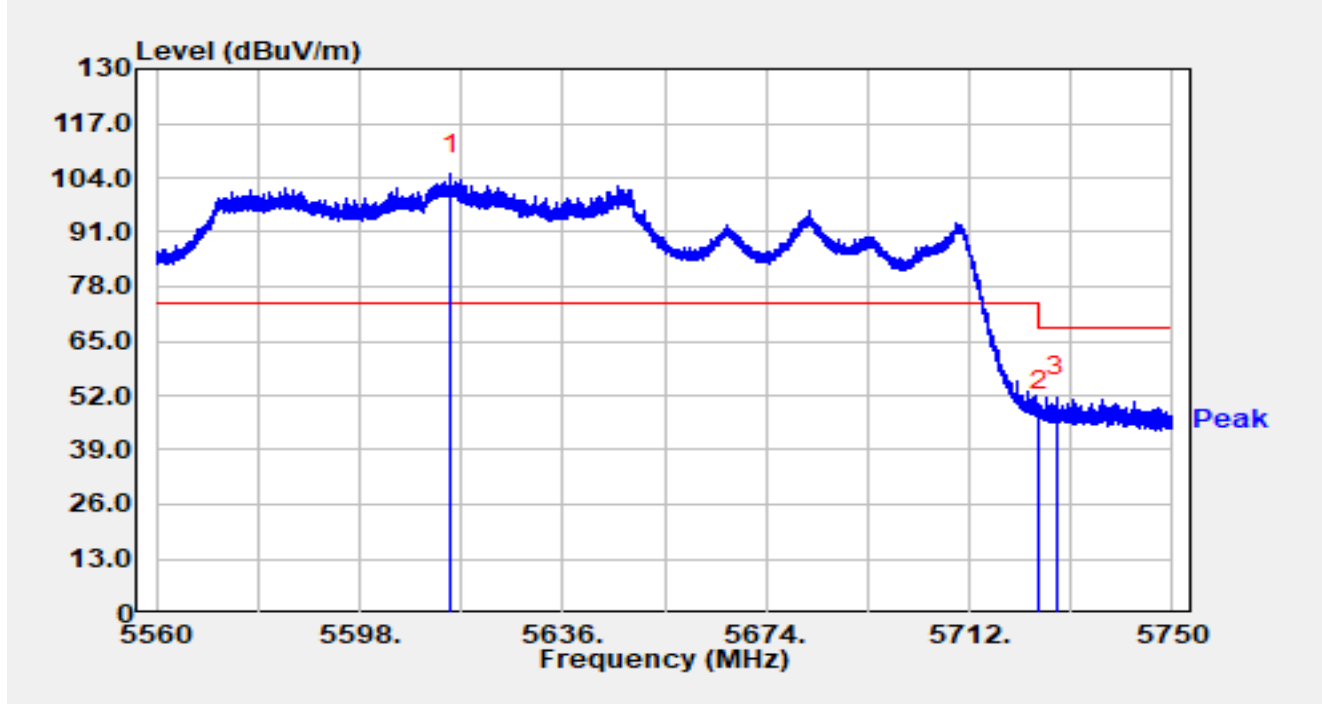


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5615.043	59.77	44.97	104.74	N/A	N/A	Peak
2		5725.000	49.40	-0.89	48.51	-19.69	68.20	Peak
3	*	5728.283	53.82	-2.26	51.56	-16.64	68.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC1	Test Date	2025-01-21
Temperature	15.1°C	Humidity	41.1%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102862	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE80 at 5775MHz		

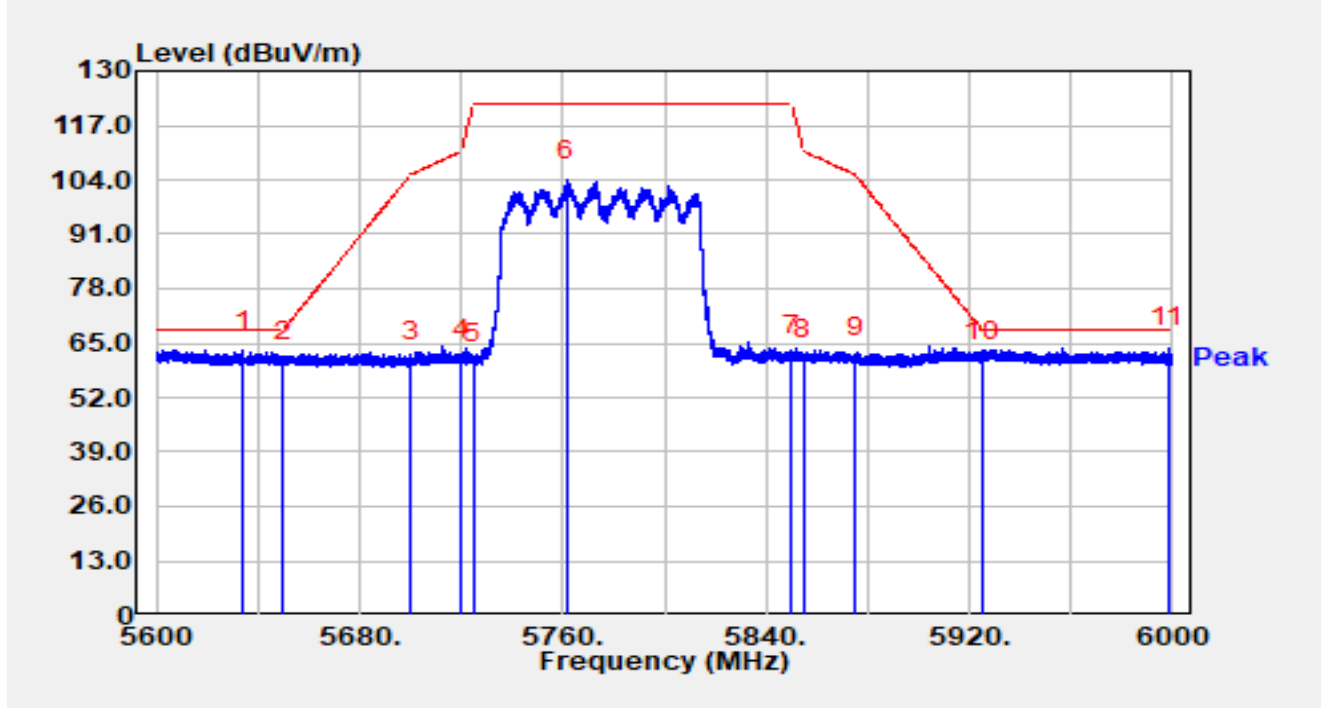

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5634.320	56.77	6.50	63.28	-4.92	68.20	Peak
2		5650.000	54.05	6.63	60.68	-7.52	68.20	Peak
3		5700.000	54.15	6.54	60.69	-44.51	105.20	Peak
4		5720.000	54.20	6.74	60.94	-49.86	110.80	Peak
5		5725.000	53.46	6.75	60.21	-61.99	122.20	Peak
6		5761.640	96.97	6.91	103.89	N/A	N/A	Peak
7		5850.000	55.00	7.00	62.00	-60.20	122.20	Peak
8		5855.000	54.19	7.06	61.25	-49.55	110.80	Peak
9		5875.000	54.92	6.81	61.73	-43.47	105.20	Peak
10		5925.000	52.93	7.88	60.81	-7.39	68.20	Peak
11	*	5998.160	56.82	7.20	64.02	-4.18	68.20	Peak


Notes:

1. " *", means this data is the worst emission level.

2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).

3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC1	Test Date	2025-01-21
Temperature	15.1°C	Humidity	41.1%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102862	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE80 at 5775MHz		

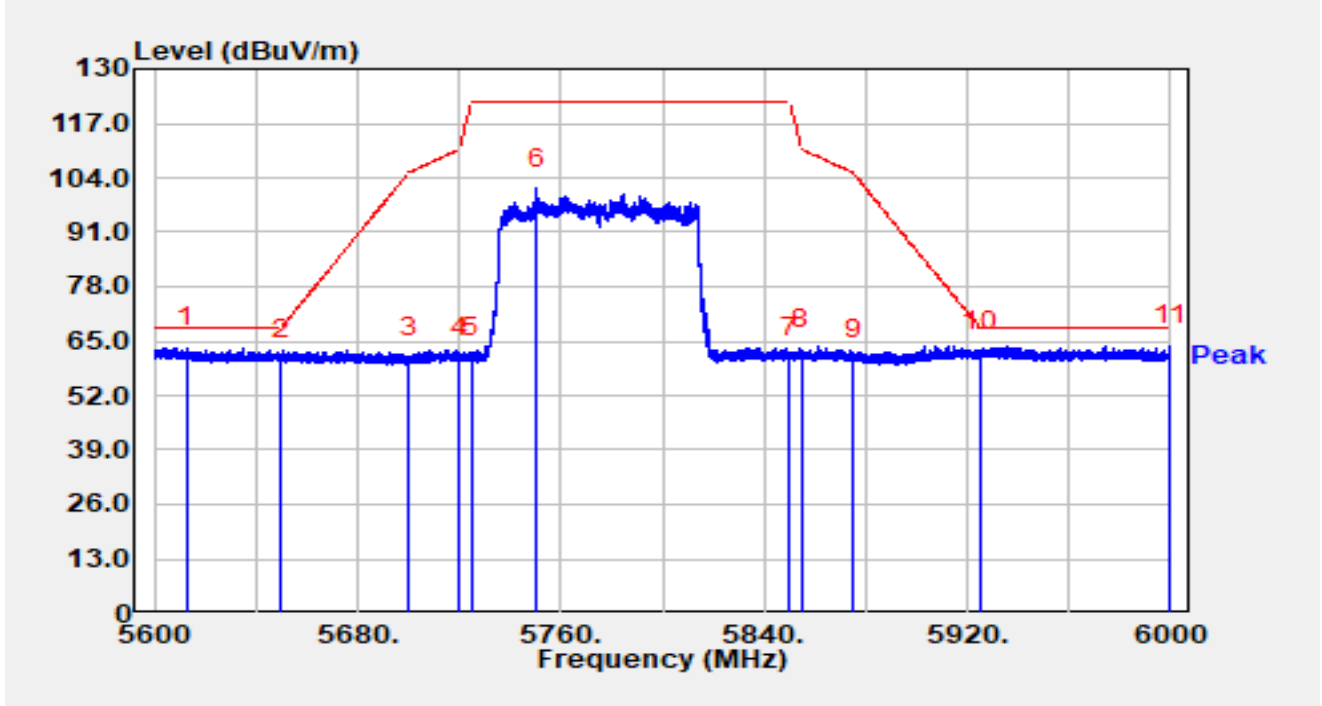

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5612.840	56.27	7.06	63.33	-4.87	68.20	Peak
2		5650.000	54.07	6.63	60.70	-7.50	68.20	Peak
3		5700.000	54.33	6.54	60.87	-44.33	105.20	Peak
4		5720.000	54.12	6.74	60.86	-49.94	110.80	Peak
5		5725.000	54.14	6.75	60.89	-61.31	122.20	Peak
6		5750.360	94.67	6.66	101.33	N/A	N/A	Peak
7		5850.000	53.99	7.00	60.99	-61.21	122.20	Peak
8		5855.000	55.77	7.06	62.84	-47.96	110.80	Peak
9		5875.000	53.77	6.81	60.58	-44.62	105.20	Peak
10		5925.000	54.51	7.88	62.39	-5.81	68.20	Peak
11	*	5999.840	56.71	7.20	63.92	-4.28	68.20	Peak


Notes:

1. " *", means this data is the worst emission level.

2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).

3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	15.9°C	Humidity	41.3%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE160 at 5250MHz		

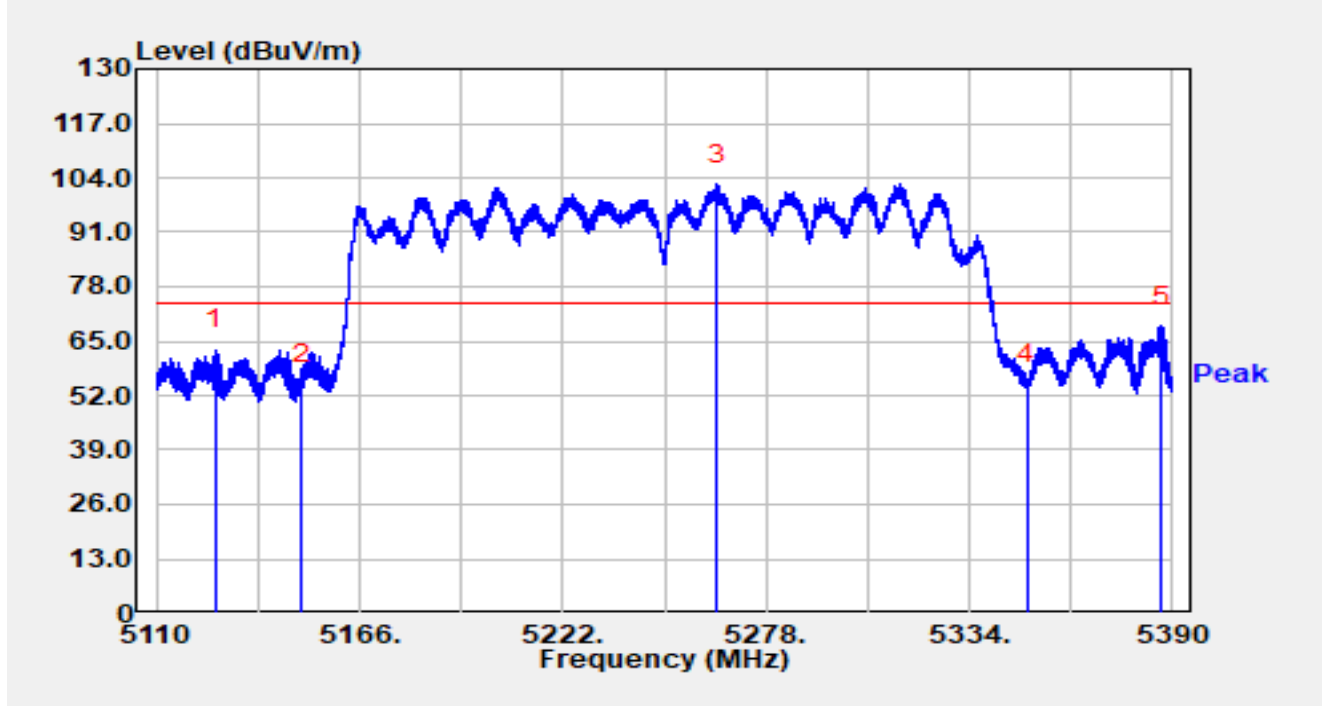


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5126.296	66.92	-4.03	62.89	-11.11	74.00	Peak
2		5150.000	56.91	-2.21	54.69	-19.31	74.00	Peak
3		5264.392	60.68	41.64	102.33	N/A	N/A	Peak
4		5350.000	56.31	-1.38	54.93	-19.07	74.00	Peak
5	*	5386.836	72.77	-4.21	68.56	-5.44	74.00	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	15.9°C	Humidity	41.3%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE160 at 5250MHz		

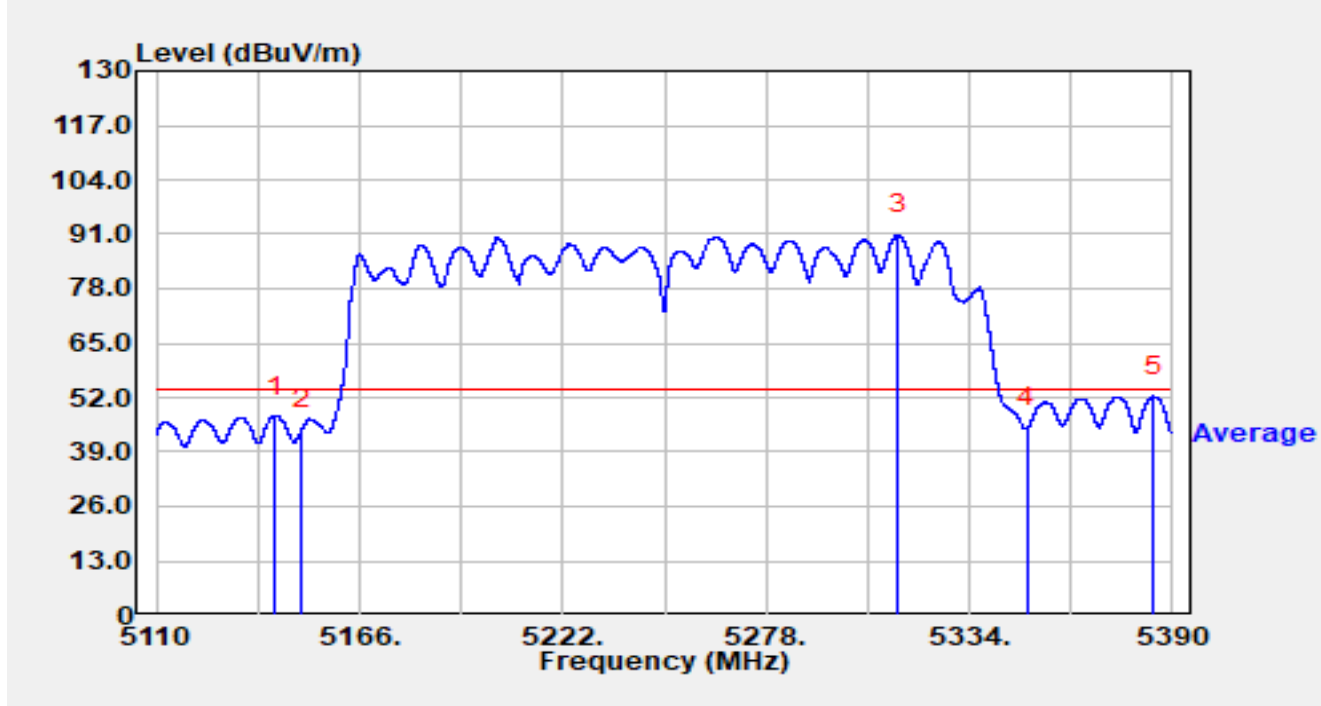


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5142.872	50.73	-3.19	47.53	-6.47	54.00	Average
2		5150.000	46.43	-2.21	44.22	-9.78	54.00	Average
3		5314.484	44.00	46.92	90.92	N/A	N/A	Average
4		5350.000	46.05	-1.38	44.68	-9.32	54.00	Average
5	*	5384.624	56.50	-4.21	52.29	-1.71	54.00	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	15.9°C	Humidity	41.3%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE160 at 5250MHz		

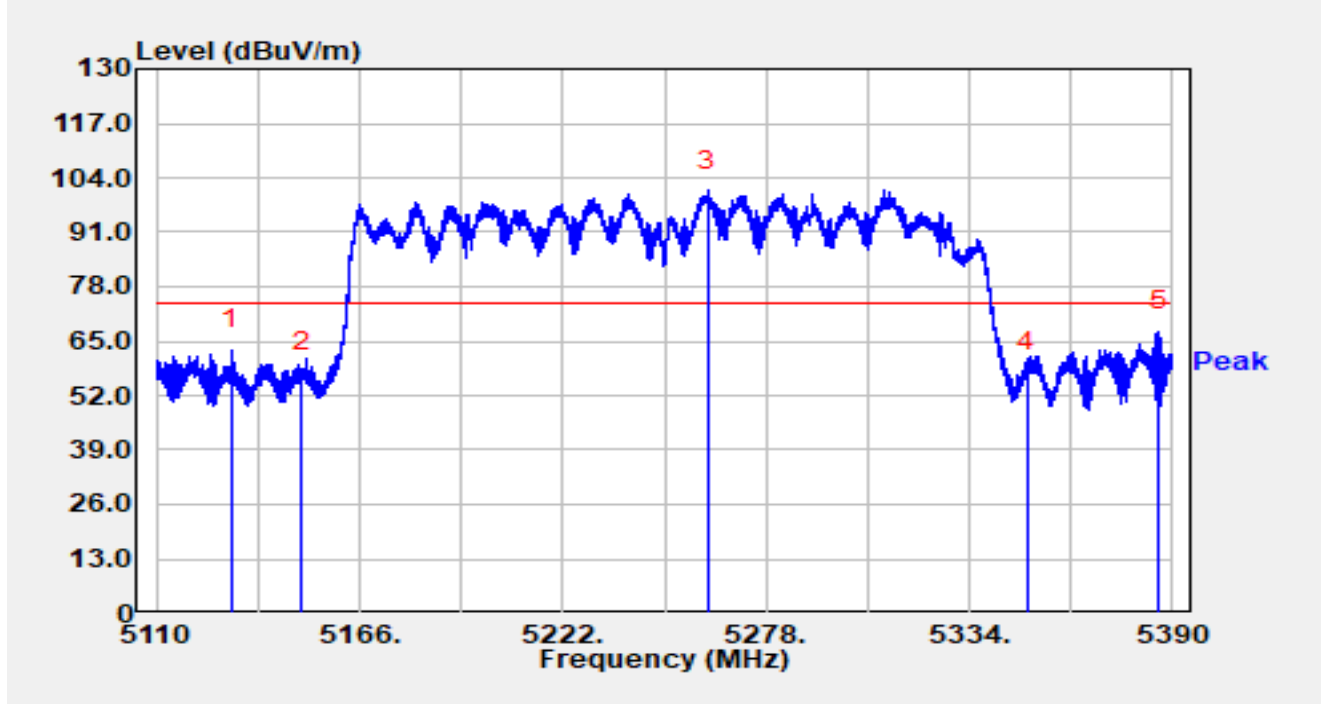


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5130.692	66.88	-3.92	62.97	-11.03	74.00	Peak
2		5150.000	59.94	-2.21	57.73	-16.27	74.00	Peak
3		5261.984	55.32	45.67	100.99	N/A	N/A	Peak
4		5350.000	59.14	-1.38	57.76	-16.24	74.00	Peak
5	*	5386.248	71.51	-4.21	67.30	-6.70	74.00	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	15.9°C	Humidity	41.3%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE160 at 5250MHz		

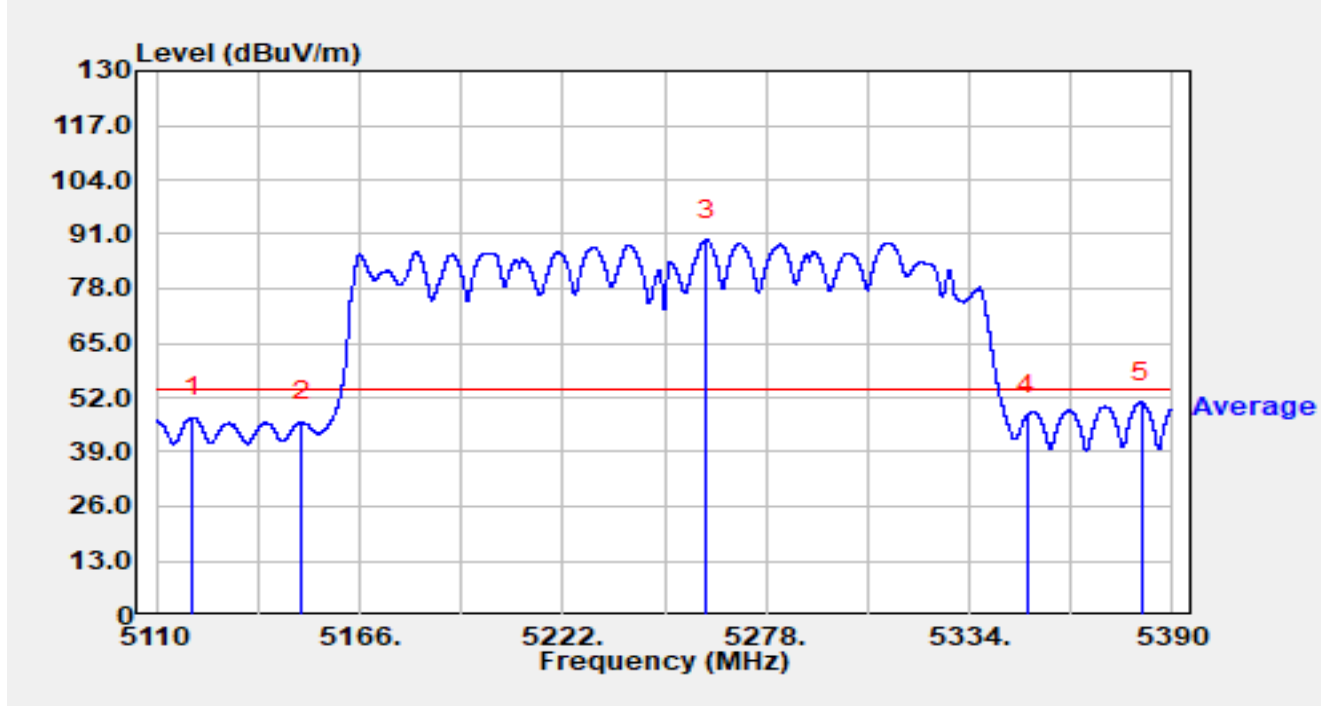


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5119.884	51.45	-4.22	47.23	-6.77	54.00	Average
2		5150.000	48.43	-2.21	46.22	-7.78	54.00	Average
3		5261.592	43.44	46.19	89.63	N/A	N/A	Average
4		5350.000	49.22	-1.38	47.85	-6.15	54.00	Average
5	*	5381.404	55.06	-4.18	50.88	-3.12	54.00	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	15.9°C	Humidity	41.3%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE160 at 5570MHz		

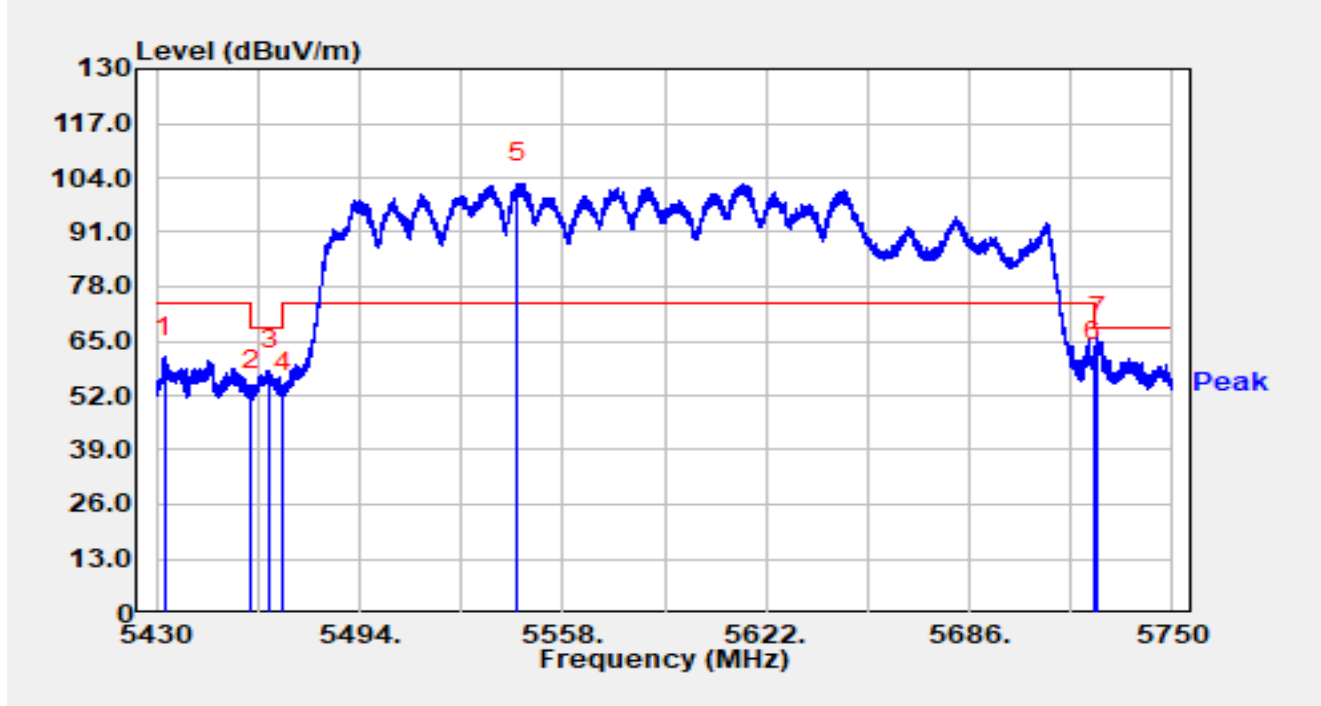


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5432.624	64.77	-3.68	61.09	-12.91	74.00	Peak
2		5460.000	55.82	-2.55	53.26	-14.94	68.20	Peak
3		5465.584	59.92	-1.94	57.97	-10.23	68.20	Peak
4		5470.000	53.37	-0.76	52.62	-15.58	68.20	Peak
5		5543.888	62.66	40.09	102.75	N/A	N/A	Peak
6		5725.000	60.78	-0.89	59.88	-8.32	68.20	Peak
7	*	5726.256	67.58	-1.54	66.04	-2.16	68.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	15.9°C	Humidity	41.3%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE160 at 5570MHz		

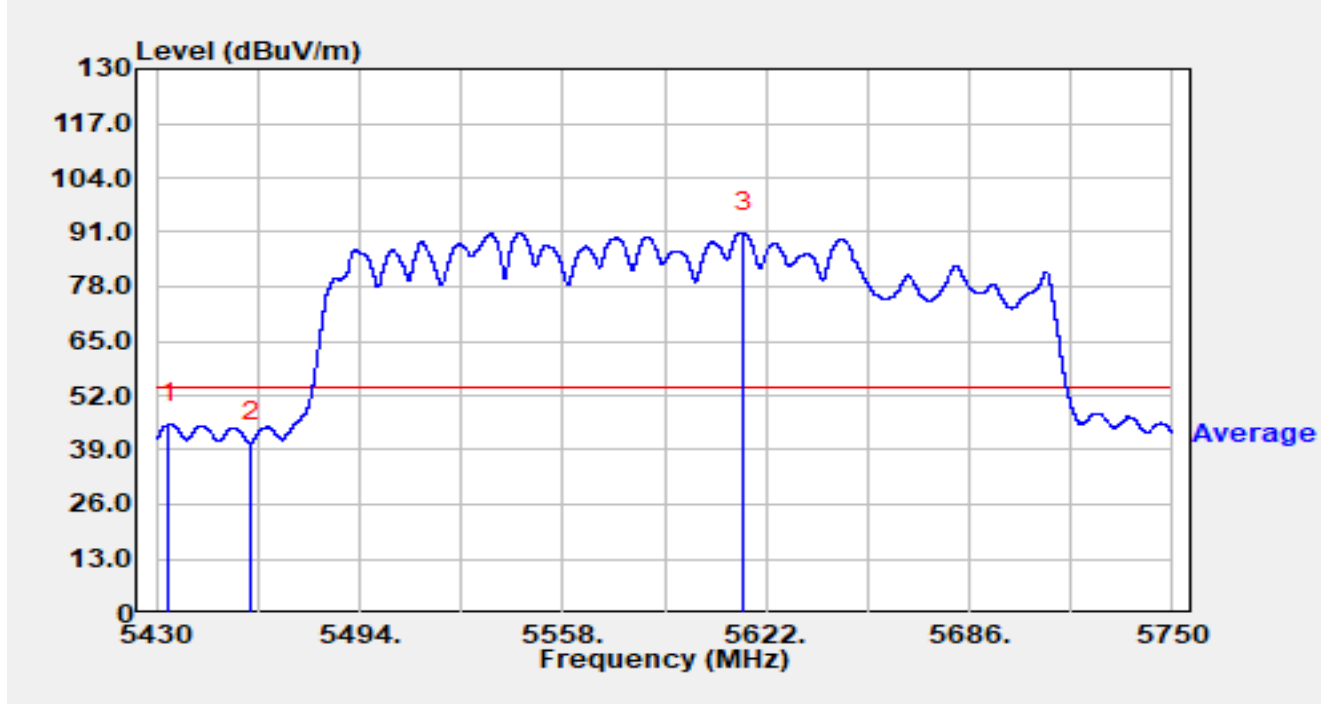


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5434.000	48.75	-3.61	45.13	-8.87	54.00	Average
2		5460.000	43.31	-2.55	40.76	-13.24	54.00	Average
3		5614.832	45.62	45.33	90.95	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	15.9°C	Humidity	41.3%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE160 at 5570MHz		

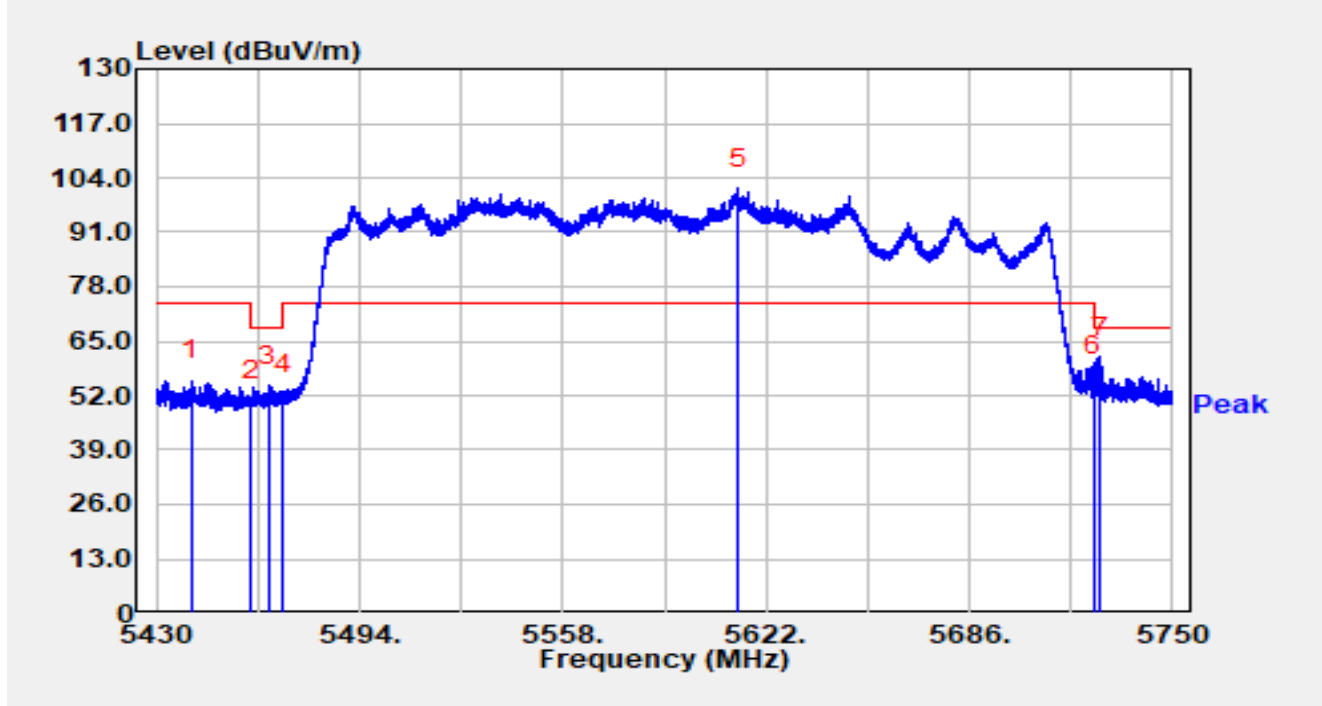


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5441.008	58.96	-3.52	55.44	-18.56	74.00	Peak
2		5460.000	53.22	-2.55	50.66	-17.54	68.20	Peak
3		5465.232	56.23	-1.99	54.25	-13.95	68.20	Peak
4		5470.000	52.94	-0.76	52.18	-16.02	68.20	Peak
5		5613.424	53.97	47.50	101.47	N/A	N/A	Peak
6		5725.000	57.47	-0.89	56.58	-11.62	68.20	Peak
7	*	5727.440	63.18	-2.00	61.18	-7.02	68.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-21
Temperature	15.9°C	Humidity	41.3%
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE160 at 5570MHz		

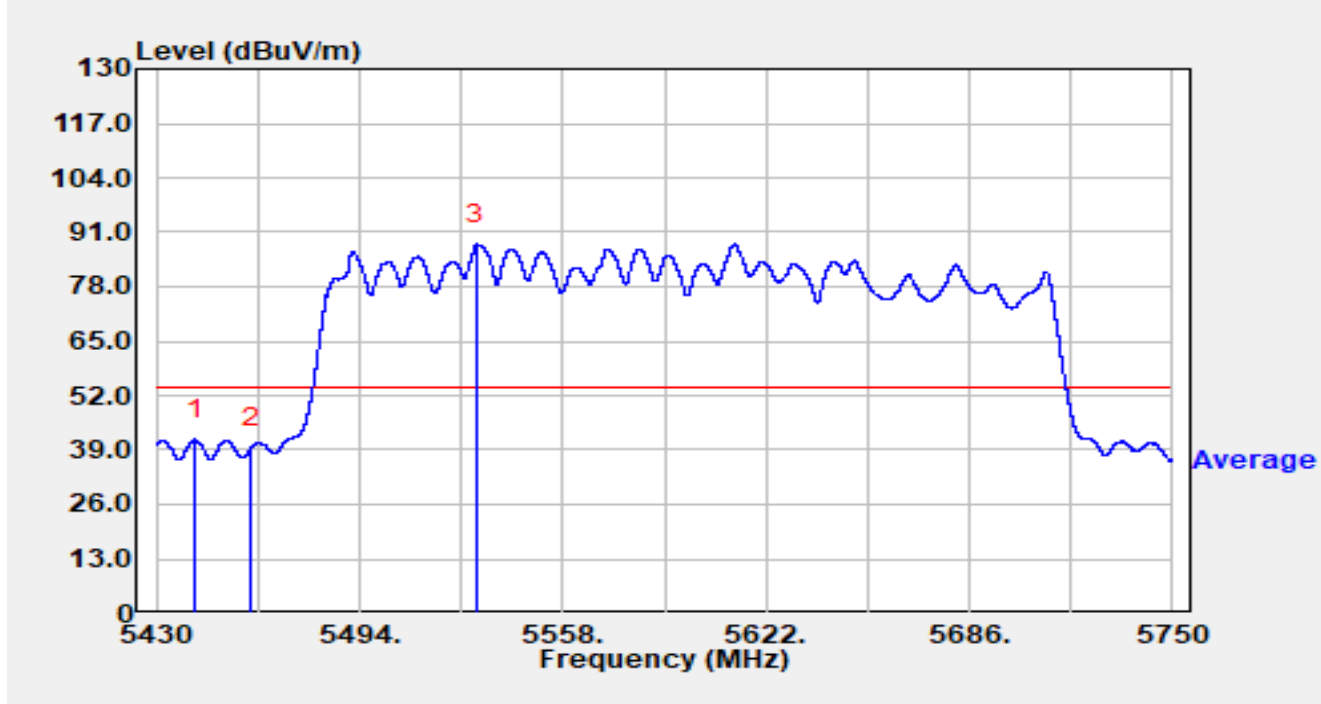


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5442.352	45.00	-3.48	41.51	-12.49	54.00	Average
2		5460.000	42.23	-2.55	39.67	-14.33	54.00	Average
3		5530.800	38.62	49.48	88.10	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

A.9 AC Conducted Emissions Test Result

Site	SIP-SR2	Test Date	2025-02-07
Temperature	20.9 °C	Humidity	33.1 %
Limit	FCC Part 15.207_CE_Mains	Test Engineer	Henry Wang
Factor	ENV216_101684_E	Polarity	Line
EUT	Mobile Computer	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11a at 5320MHz		

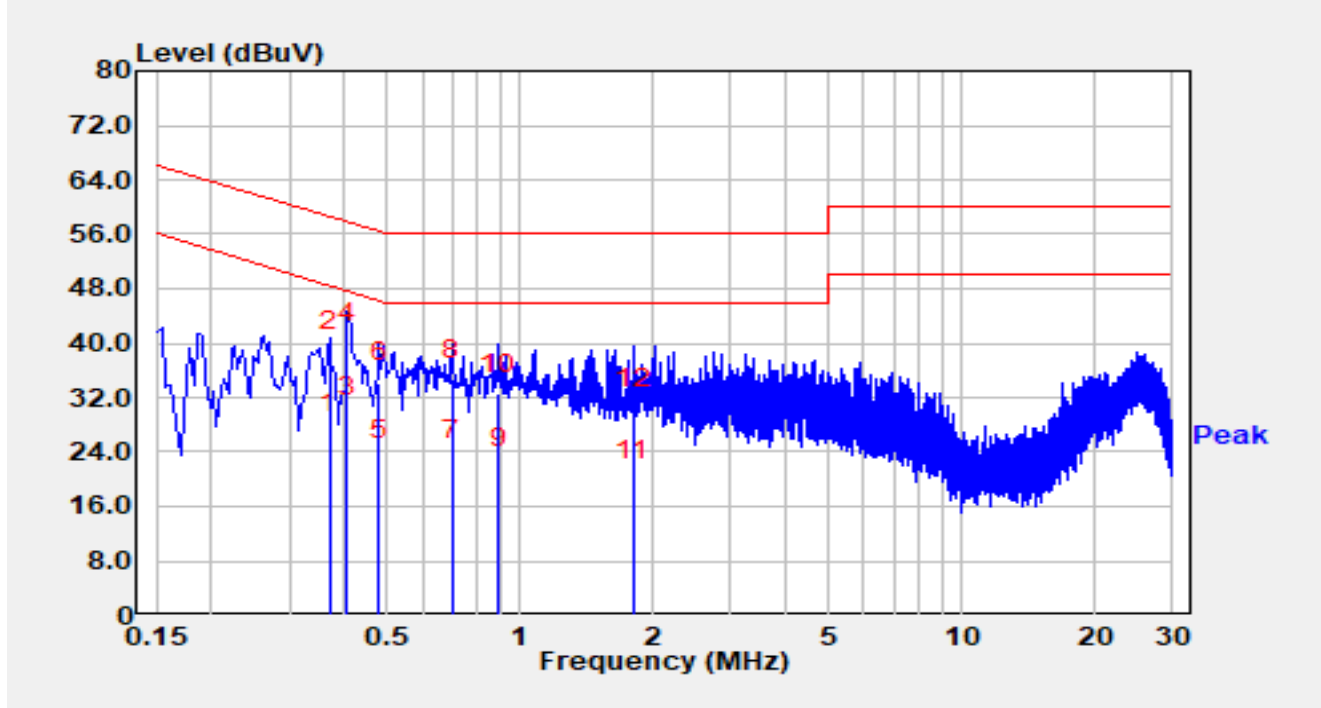


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.370	16.90	9.81	26.71	-21.79	48.50	Average
2		0.370	28.91	9.81	38.73	-19.77	58.50	QP
3		0.406	19.41	9.82	29.24	-18.49	47.73	Average
4	*	0.406	30.16	9.82	39.98	-17.75	57.73	QP
5		0.478	12.92	9.83	22.75	-23.63	46.37	Average
6		0.478	24.42	9.83	34.25	-22.13	56.37	QP
7		0.702	12.89	9.84	22.73	-23.27	46.00	Average
8		0.702	24.81	9.84	34.65	-21.35	56.00	QP
9		0.894	11.81	9.85	21.66	-24.34	46.00	Average
10		0.894	22.65	9.85	32.50	-23.50	56.00	QP
11		1.806	9.88	9.95	19.84	-26.16	46.00	Average
12		1.806	20.48	9.95	30.43	-25.57	56.00	QP

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
3. Measurement (dB μ V) = Reading (dB μ V) + C.F (dB).

Site	SIP-SR2	Test Date	2025-02-07
Temperature	20.9 °C	Humidity	33.1 %
Limit	FCC Part 15.207_CE_Mains	Test Engineer	Henry Wang
Factor	ENV216_101684_E	Polarity	Neutral
EUT	Mobile Computer	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11a at 5320MHz		

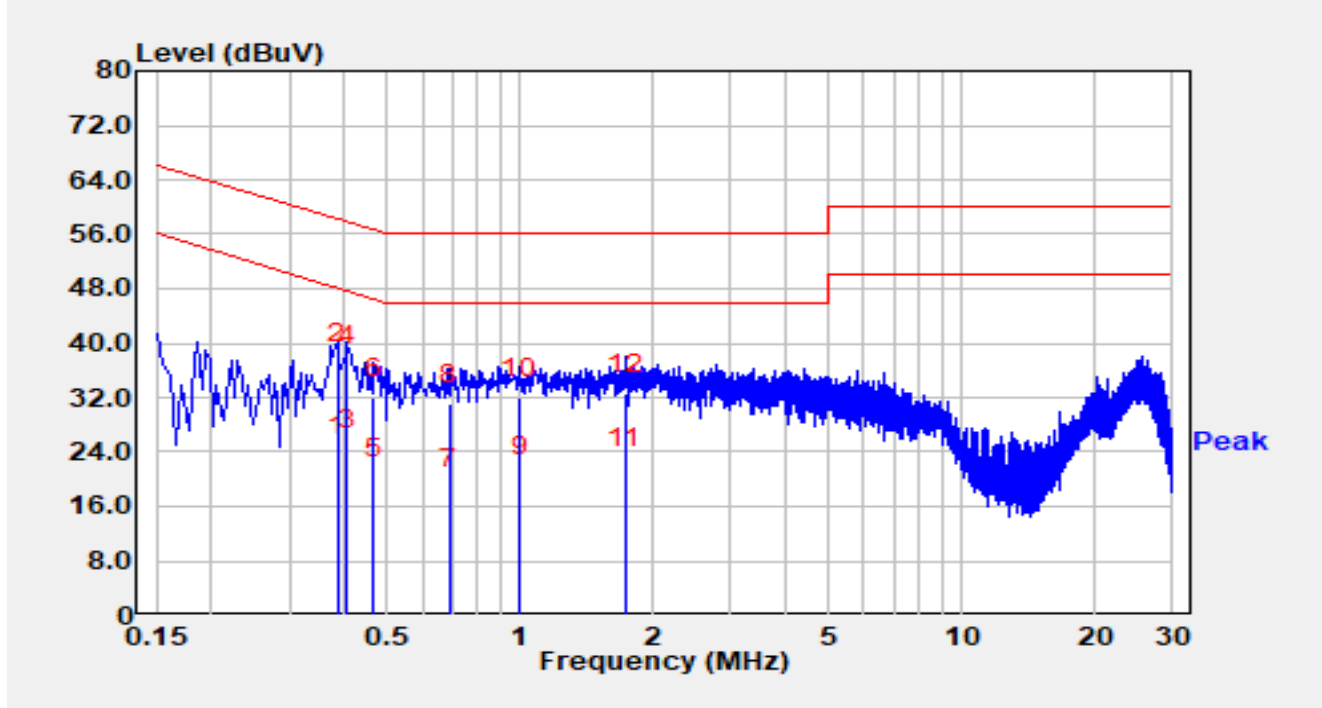

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.386	13.54	9.81	23.35	-24.80	48.15	Average
2		0.386	27.05	9.81	36.85	-21.30	58.15	QP
3		0.406	14.58	9.81	24.39	-23.34	47.73	Average
4	*	0.406	26.75	9.81	36.56	-21.17	57.73	QP
5		0.466	10.24	9.81	20.05	-26.54	46.59	Average
6		0.466	22.13	9.81	31.94	-24.65	56.59	QP
7		0.694	8.69	9.83	18.52	-27.48	46.00	Average
8		0.694	21.17	9.83	30.99	-25.01	56.00	QP
9		0.998	10.39	9.84	20.23	-25.77	46.00	Average
10		0.998	22.06	9.84	31.90	-24.10	56.00	QP
11		1.730	11.55	9.92	21.48	-24.52	46.00	Average
12		1.730	22.54	9.92	32.46	-23.54	56.00	QP

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
3. Measurement (dB μ V) = Reading (dB μ V) + C.F (dB).

Appendix B – Test Setup Photograph

Refer to “2412RSU045-UT” file.

Appendix C – EUT Photograph

Refer to “2412RSU045-UE” file.

The End
