


Site	SIP-AC3	Test Date	2025-01-17
Temperature	13.3 °C	Humidity	32.2 %
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 2412MHz		

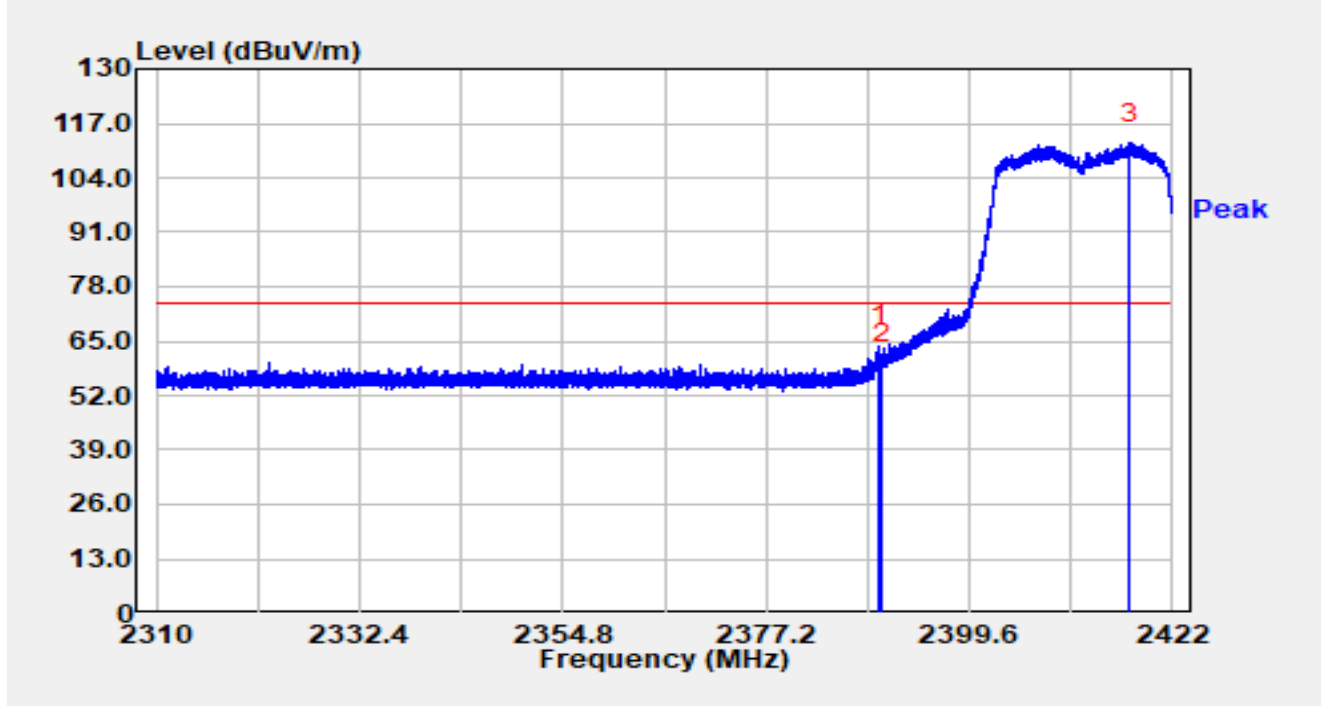


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2389.632	31.15	32.69	63.83	-10.17	74.00	Peak
2		2390.000	26.74	32.69	59.42	-14.58	74.00	Peak
3		2417.274	79.53	32.81	112.34	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-17
Temperature	13.3 °C	Humidity	32.2 %
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 2412MHz		

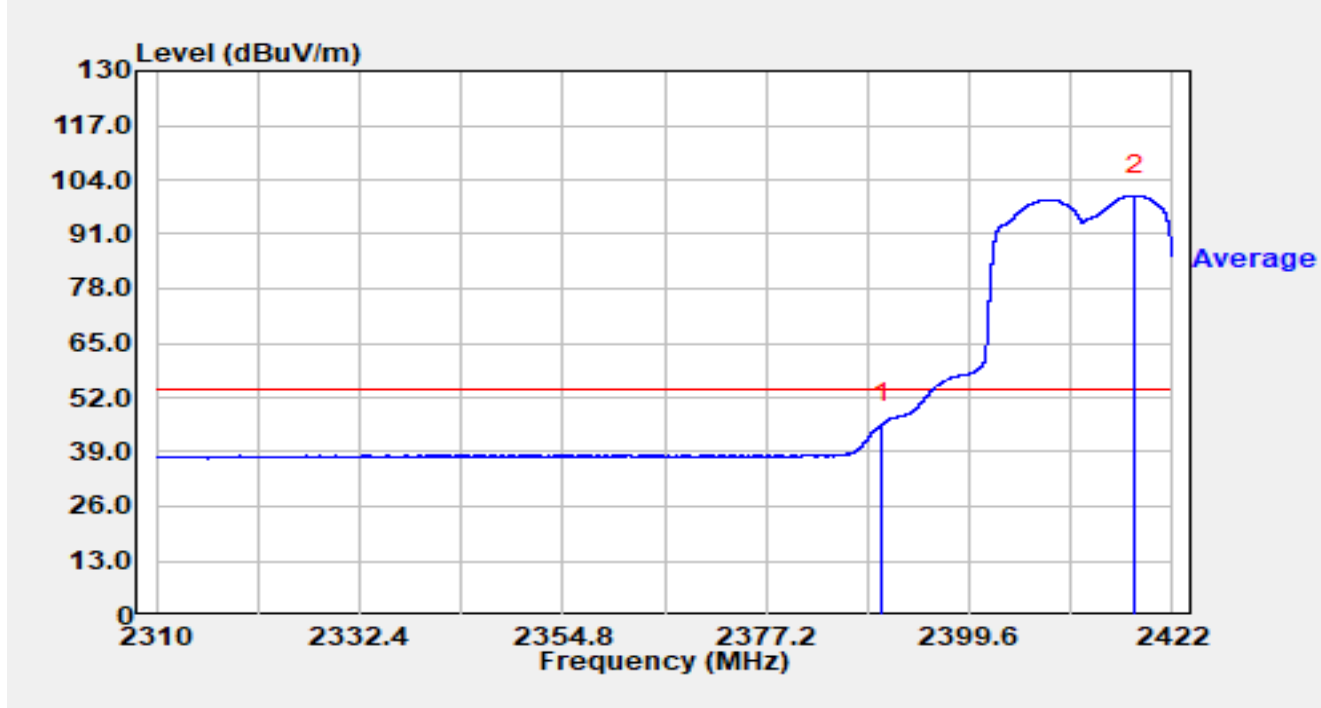


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2390.000	13.03	32.69	45.72	-8.28	54.00	Average
2		2417.789	67.42	32.81	100.23	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-17
Temperature	13.3 ° C	Humidity	32.2 %
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 2412MHz		

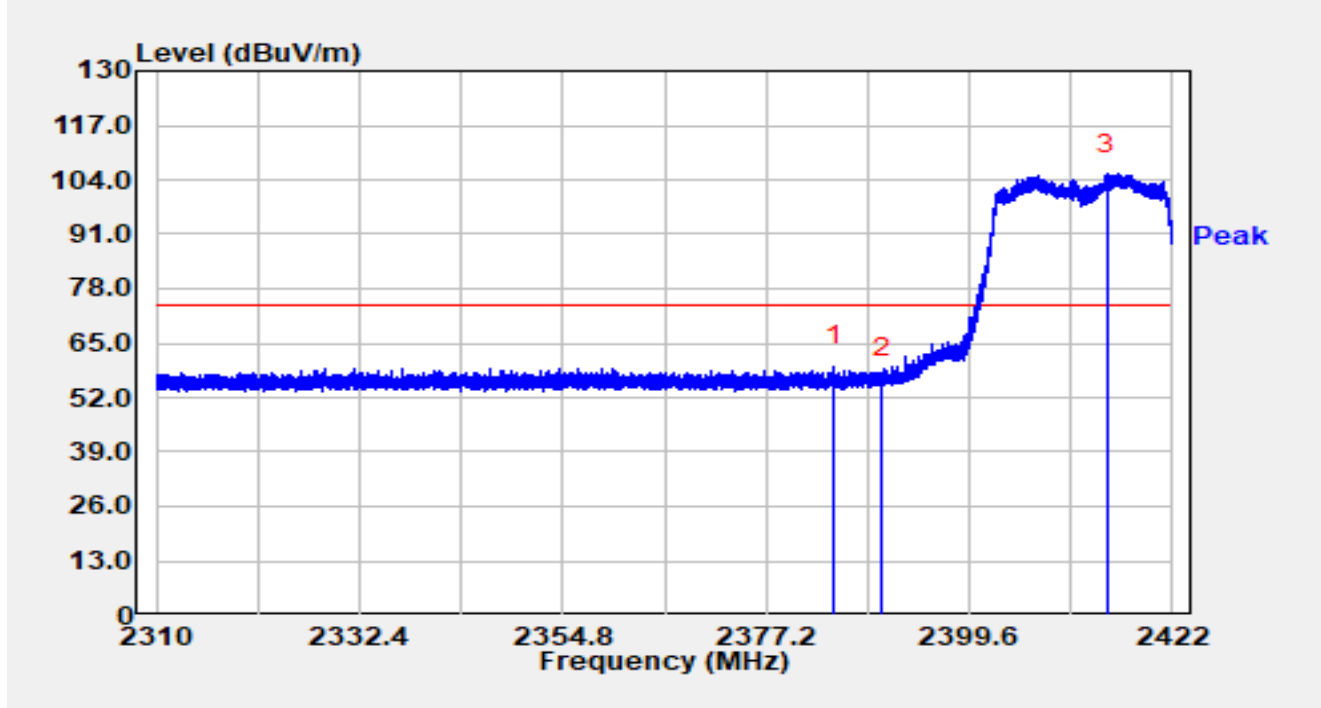


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2384.749	26.91	32.66	59.58	-14.42	74.00	Peak
2		2390.000	24.19	32.69	56.87	-17.13	74.00	Peak
3		2414.709	72.67	32.79	105.47	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-17
Temperature	13.3 °C	Humidity	32.2 %
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 2412MHz		

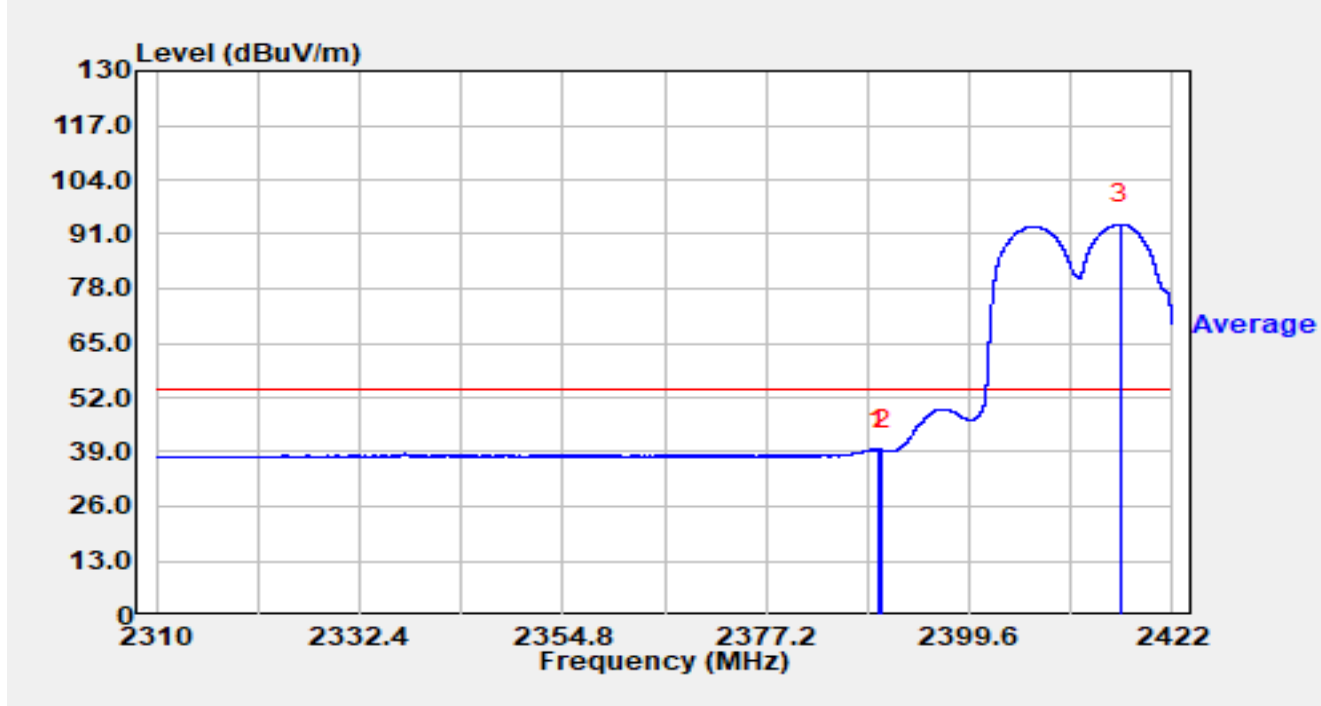


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2389.565	6.94	32.69	39.63	-14.37	54.00	Average
2		2390.000	6.78	32.69	39.46	-14.54	54.00	Average
3		2416.243	60.57	32.80	93.37	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-17
Temperature	13.3 °C	Humidity	32.2 %
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 2462MHz		

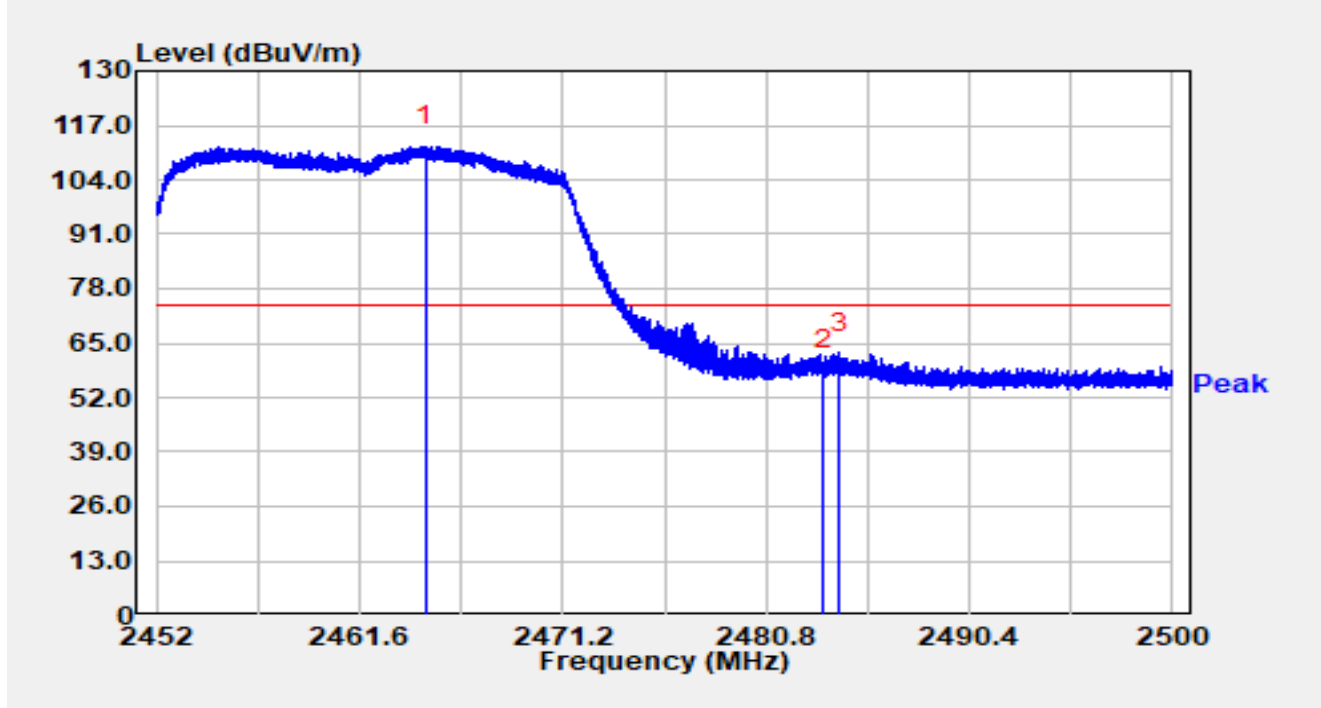


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2464.729	79.02	33.00	112.02	N/A	N/A	Peak
2		2483.500	25.49	33.13	58.62	-15.38	74.00	Peak
3	*	2484.275	29.57	33.13	62.70	-11.30	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-17
Temperature	13.3 °C	Humidity	32.2 %
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 2462MHz		

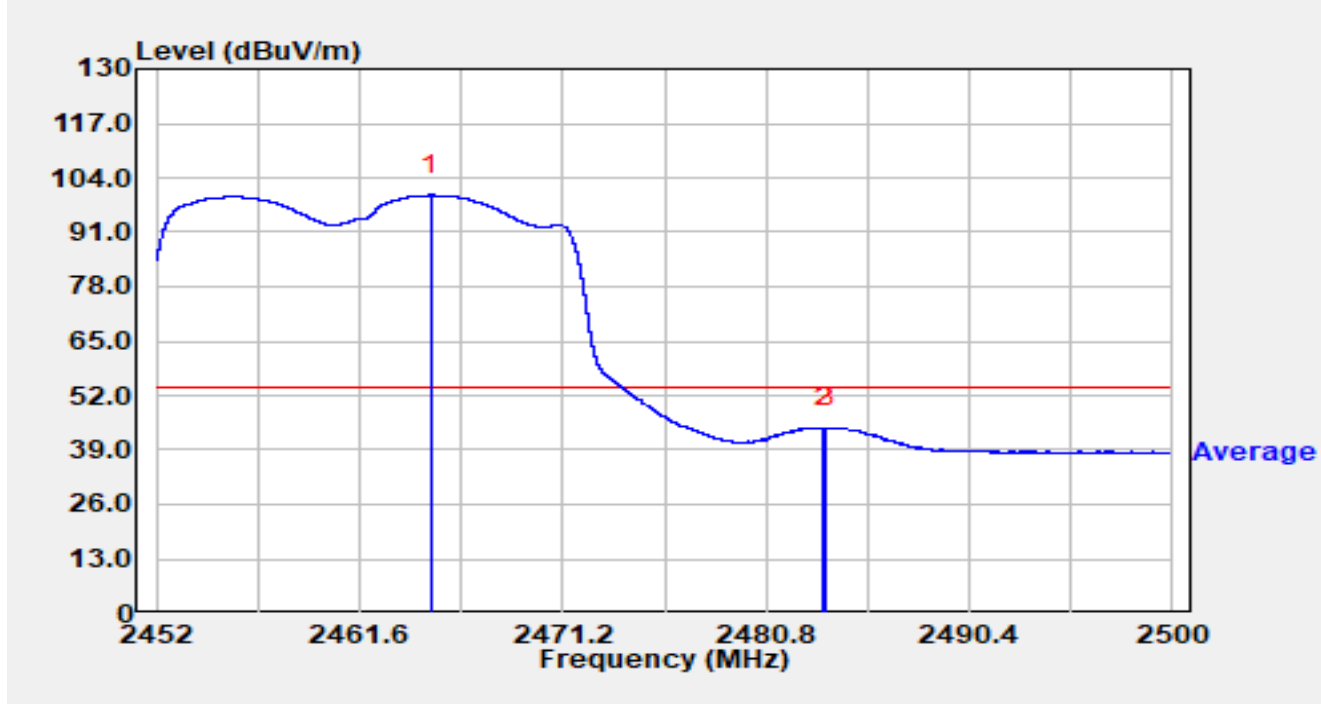


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2464.965	66.84	33.01	99.85	N/A	N/A	Average
2		2483.500	11.19	33.13	44.33	-9.67	54.00	Average
3	*	2483.651	11.23	33.13	44.36	-9.64	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-17
Temperature	13.3 °C	Humidity	32.2 %
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 2462MHz		

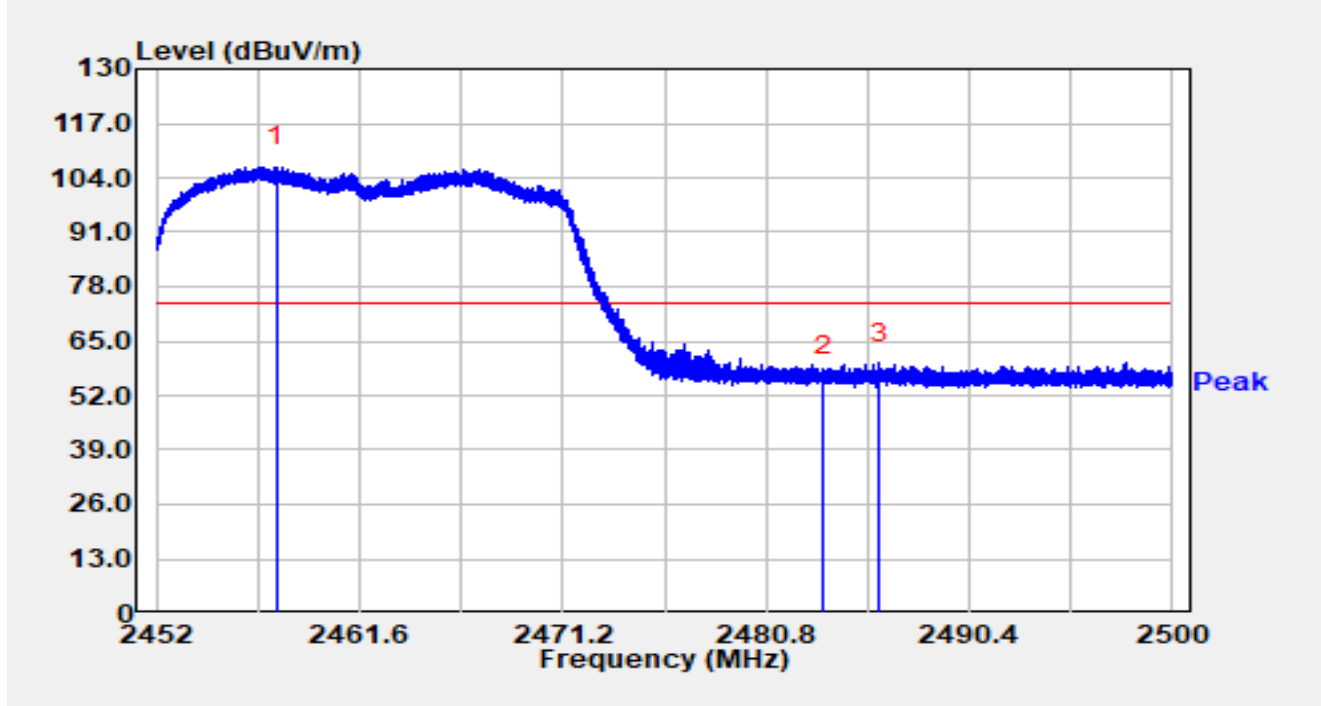


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2457.702	73.54	32.97	106.51	N/A	N/A	Peak
2		2483.500	23.47	33.13	56.60	-17.40	74.00	Peak
3	*	2486.152	26.70	33.14	59.84	-14.16	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-17
Temperature	13.3 °C	Humidity	32.2 %
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 2462MHz		

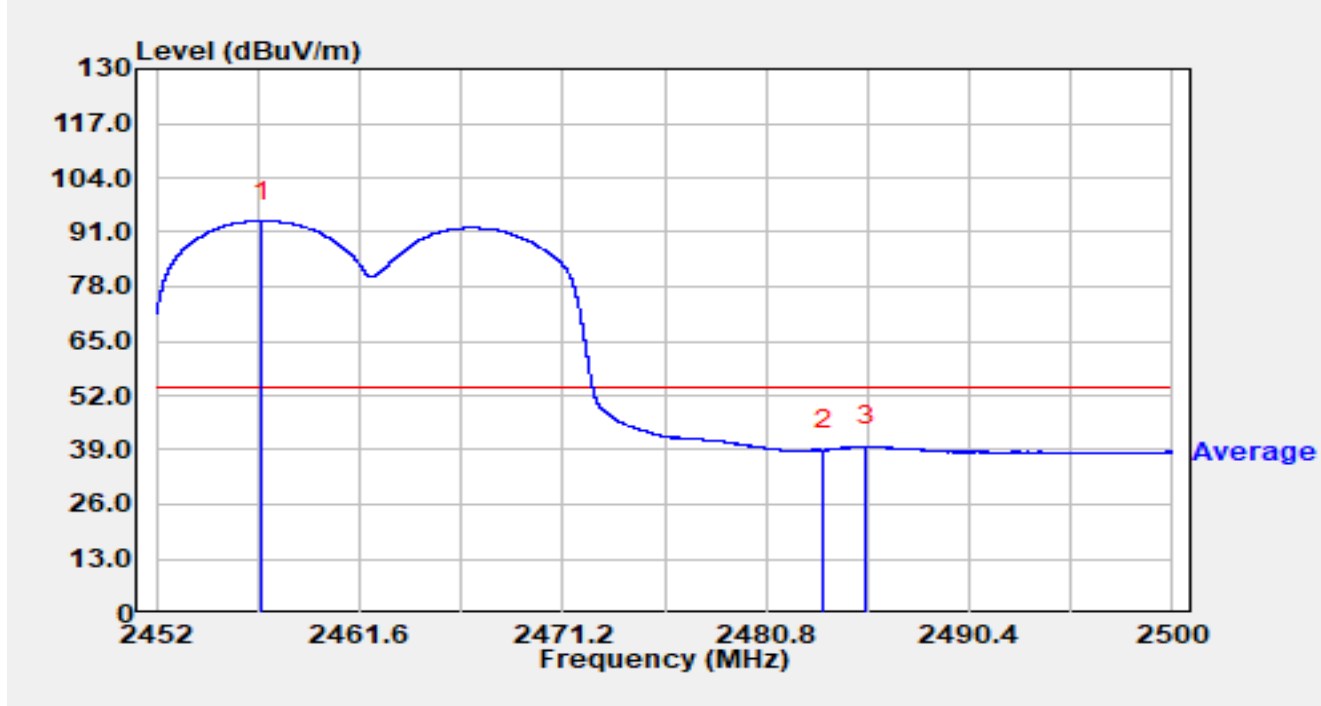


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2456.958	60.72	32.97	93.69	N/A	N/A	Average
2		2483.500	5.79	33.13	38.92	-15.08	54.00	Average
3	*	2485.528	6.80	33.14	39.94	-14.06	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-17
Temperature	16.8 °C	Humidity	44.7 %
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE40 at 2422MHz		

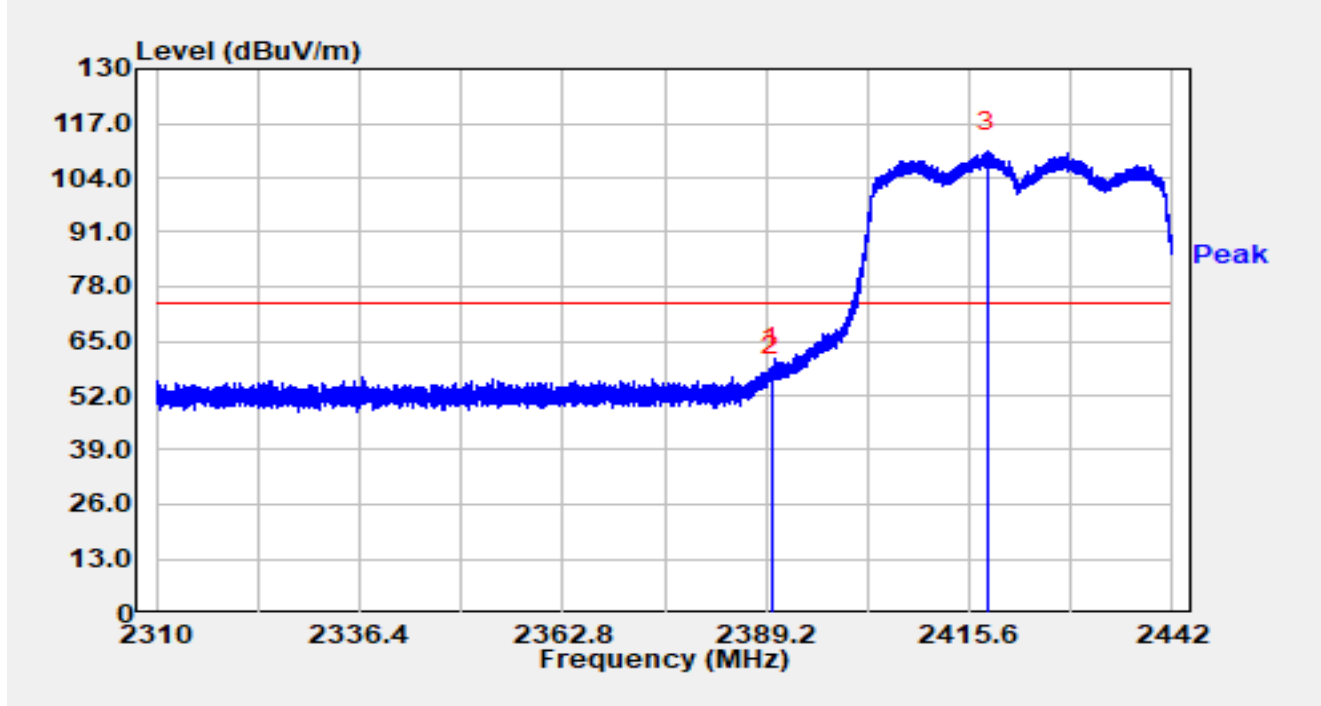


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2389.886	26.11	32.69	58.80	-15.20	74.00	Peak
2		2390.000	23.90	32.69	56.59	-17.41	74.00	Peak
3		2417.870	77.36	32.81	110.17	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-17
Temperature	16.8 °C	Humidity	44.7 %
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE40 at 2422MHz		

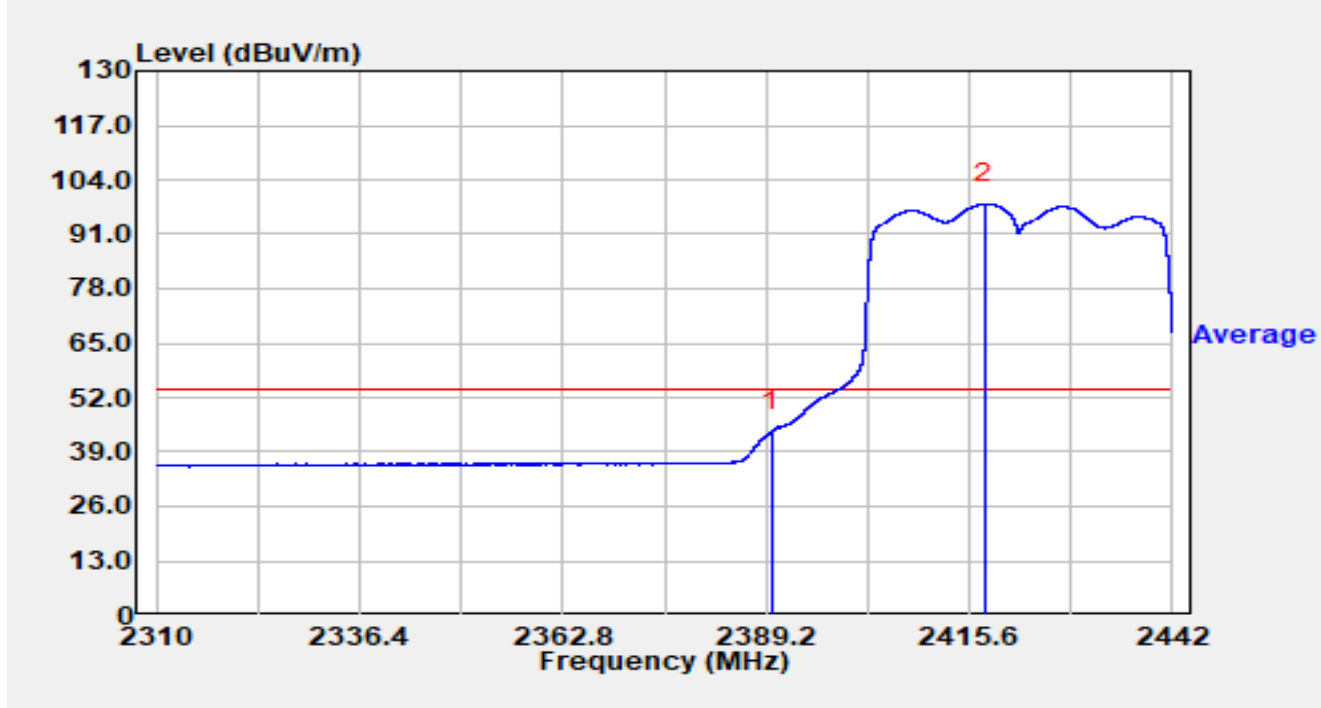


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2390.000	11.16	32.69	43.84	-10.16	54.00	Average
2		2417.659	65.45	32.81	98.26	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-17
Temperature	16.8 °C	Humidity	44.7 %
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE40 at 2422MHz		

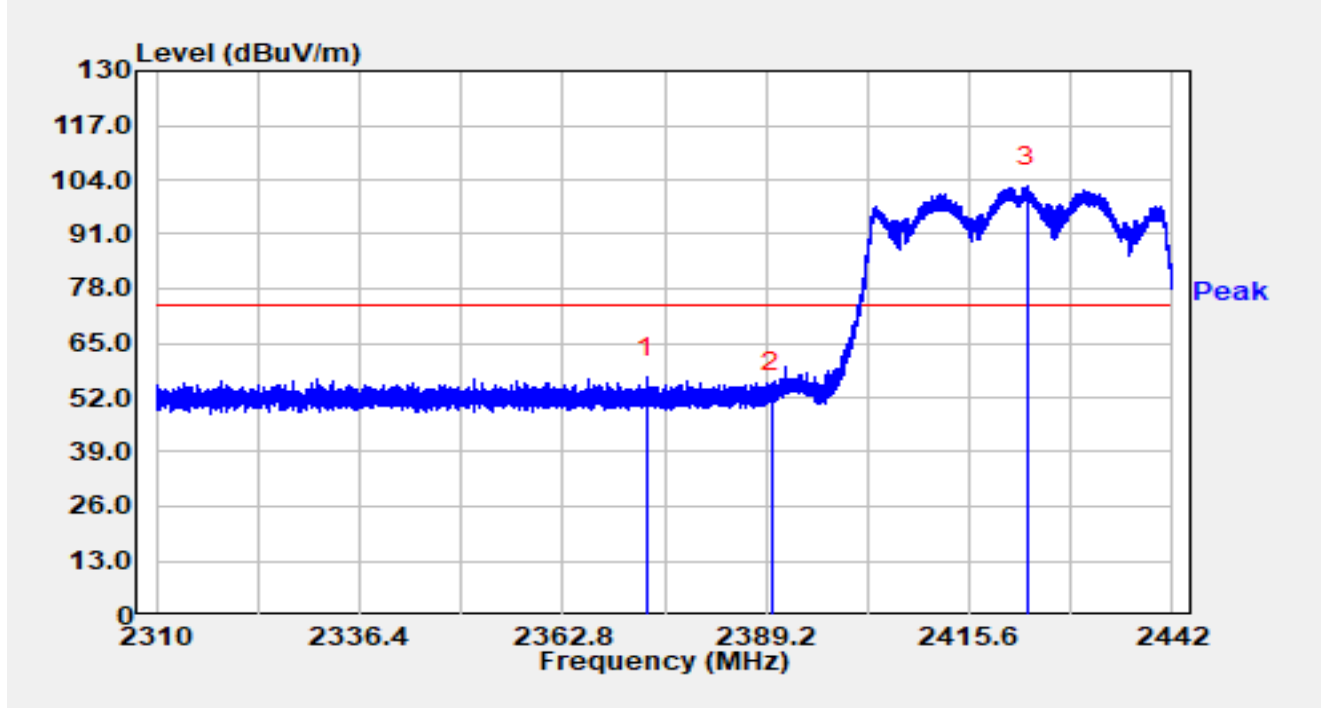


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2373.664	24.08	32.63	56.71	-17.29	74.00	Peak
2		2390.000	20.78	32.69	53.47	-20.53	74.00	Peak
3		2423.137	69.50	32.84	102.34	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-17
Temperature	16.8 °C	Humidity	44.7 %
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE40 at 2422MHz		

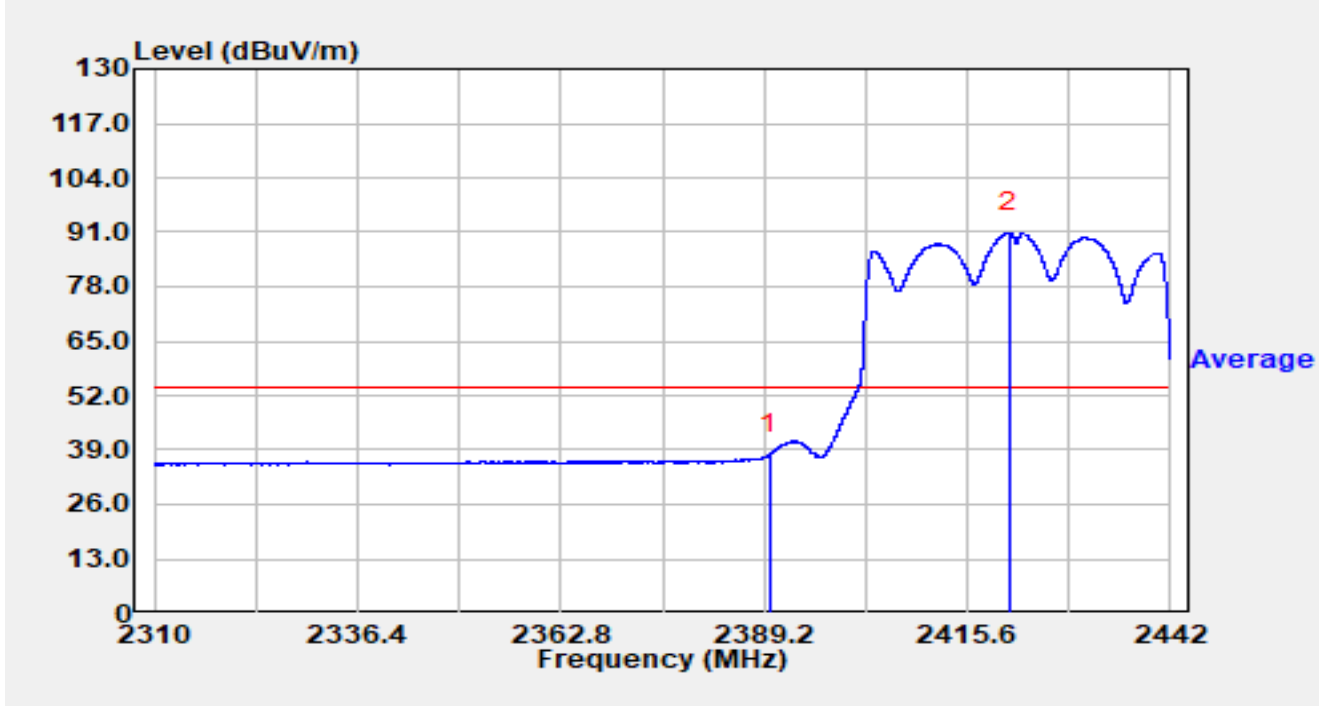


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2390.000	5.19	32.69	37.88	-16.12	54.00	Average
2		2421.091	58.13	32.83	90.96	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-17
Temperature	16.8 °C	Humidity	44.7 %
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE40 at 2452MHz		

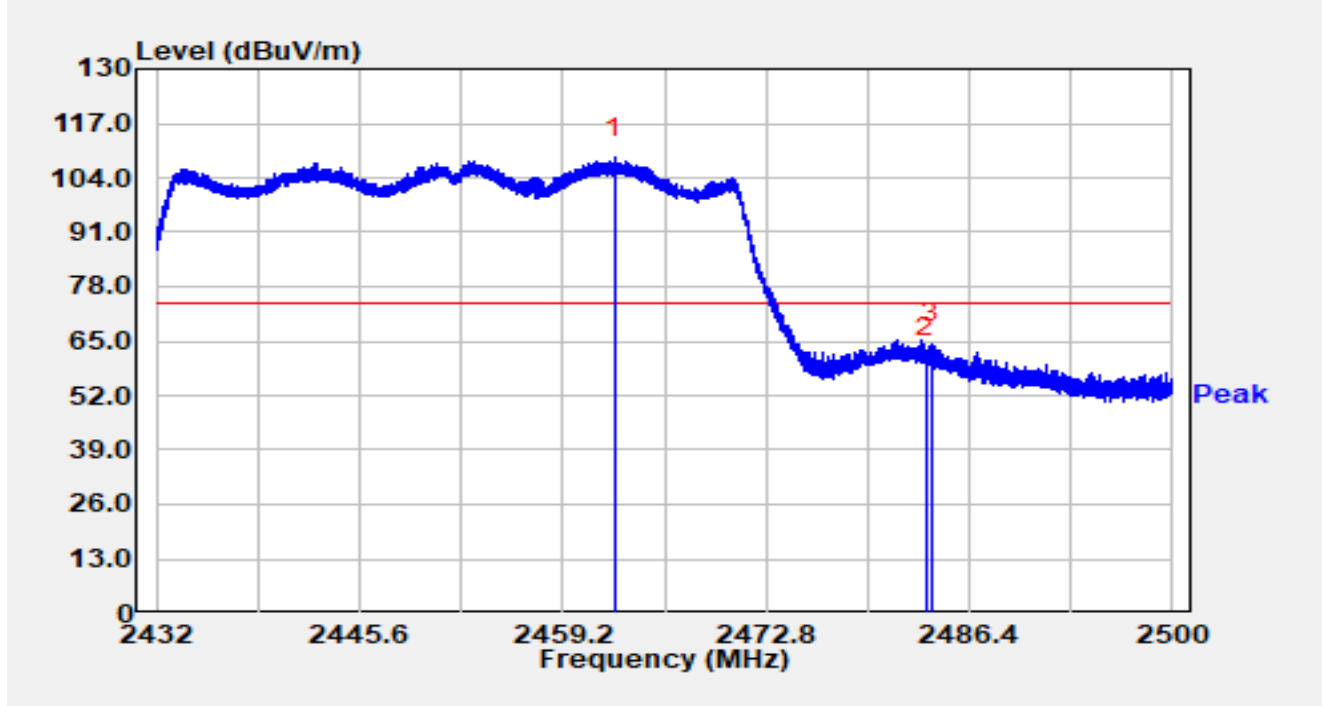


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2462.668	75.86	32.99	108.85	N/A	N/A	Peak
2		2483.500	27.72	33.13	60.85	-13.15	74.00	Peak
3	*	2483.843	31.25	33.13	64.38	-9.62	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-17
Temperature	16.8 °C	Humidity	44.7 %
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE40 at 2452MHz		

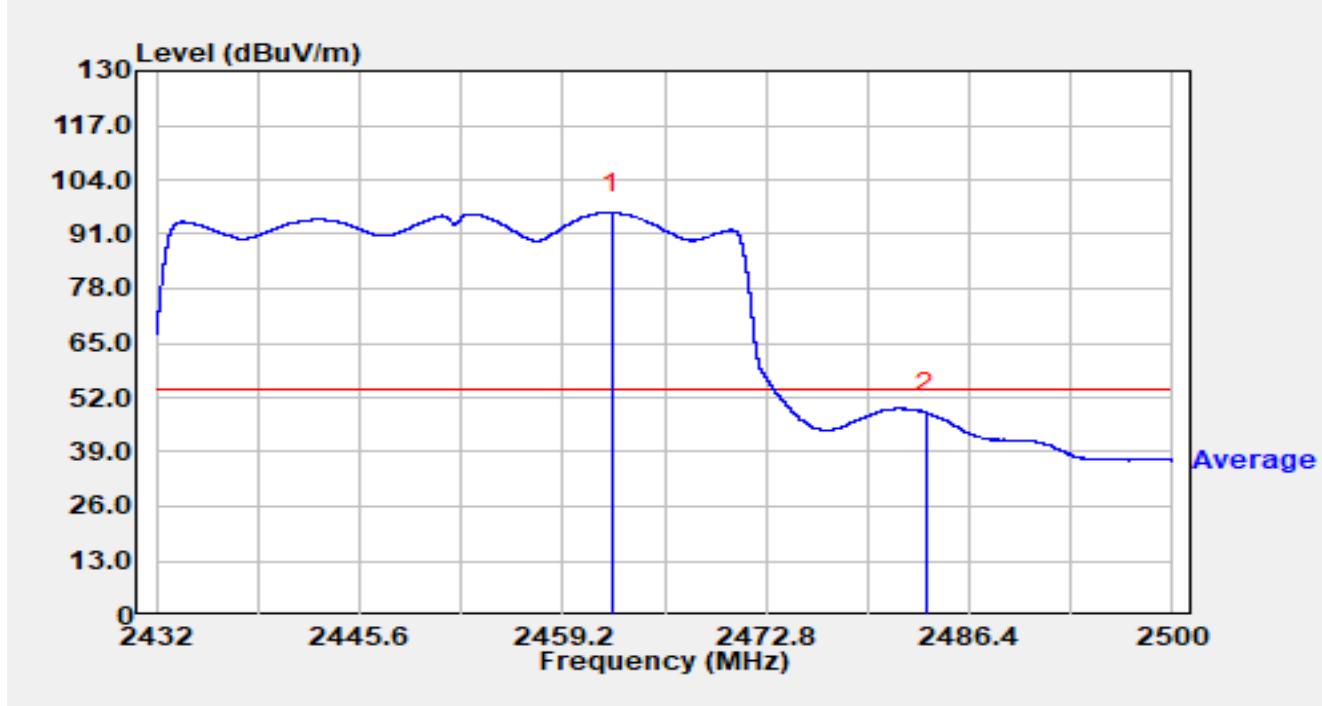


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2462.471	63.13	32.99	96.12	N/A	N/A	Average
2	*	2483.500	15.29	33.13	48.42	-5.58	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-17
Temperature	16.8 °C	Humidity	44.7 %
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE40 at 2452MHz		

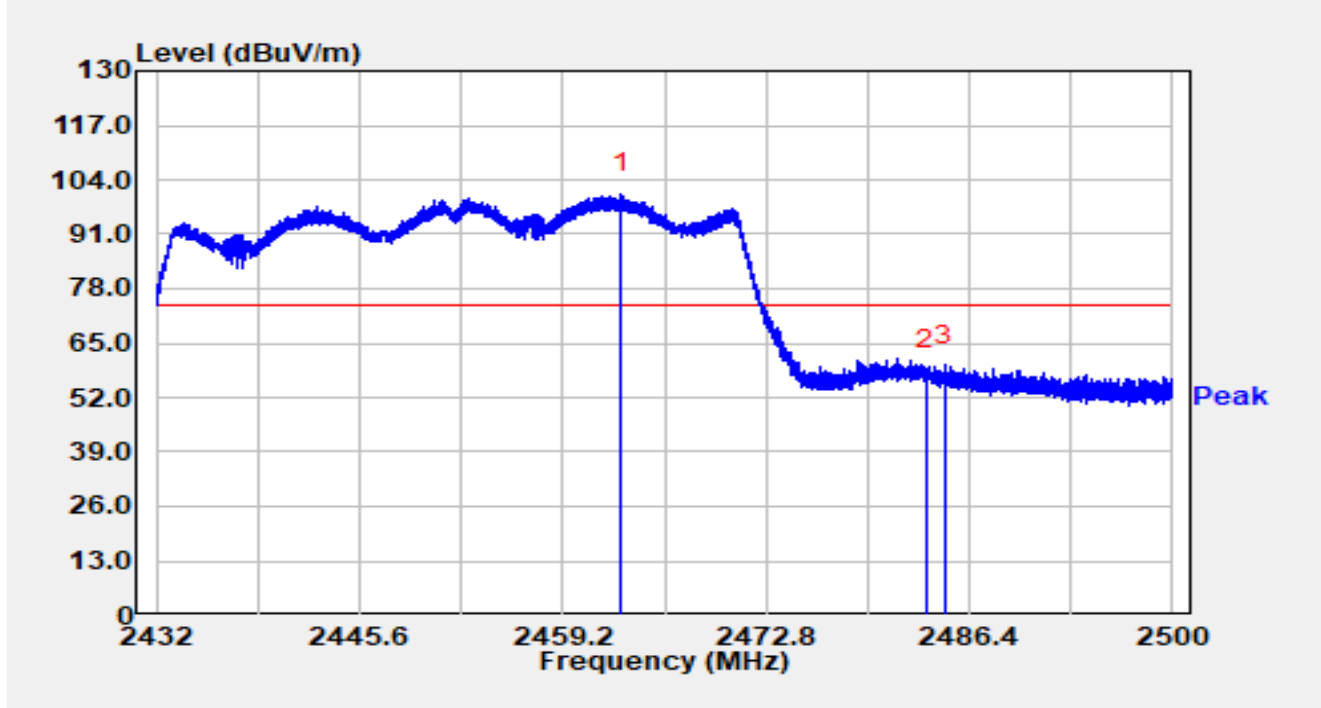


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2463.063	67.68	32.99	100.67	N/A	N/A	Peak
2		2483.500	25.27	33.13	58.40	-15.60	74.00	Peak
3	*	2484.768	26.58	33.14	59.72	-14.28	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-17
Temperature	16.8 °C	Humidity	44.7 %
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE40 at 2452MHz		

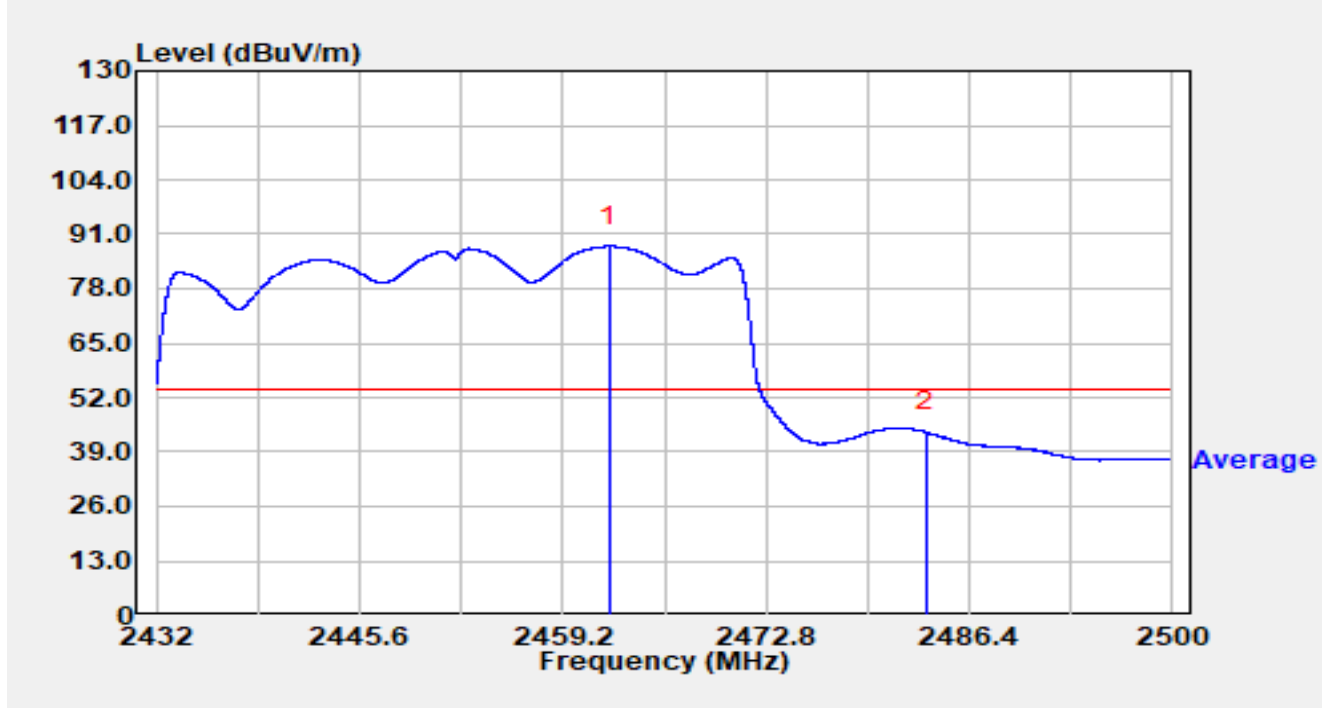


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2462.287	55.13	32.99	88.11	N/A	N/A	Average
2	*	2483.500	10.63	33.13	43.76	-10.24	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-17
Temperature	16.8 °C	Humidity	44.7 %
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by VHT20 at 2412MHz		

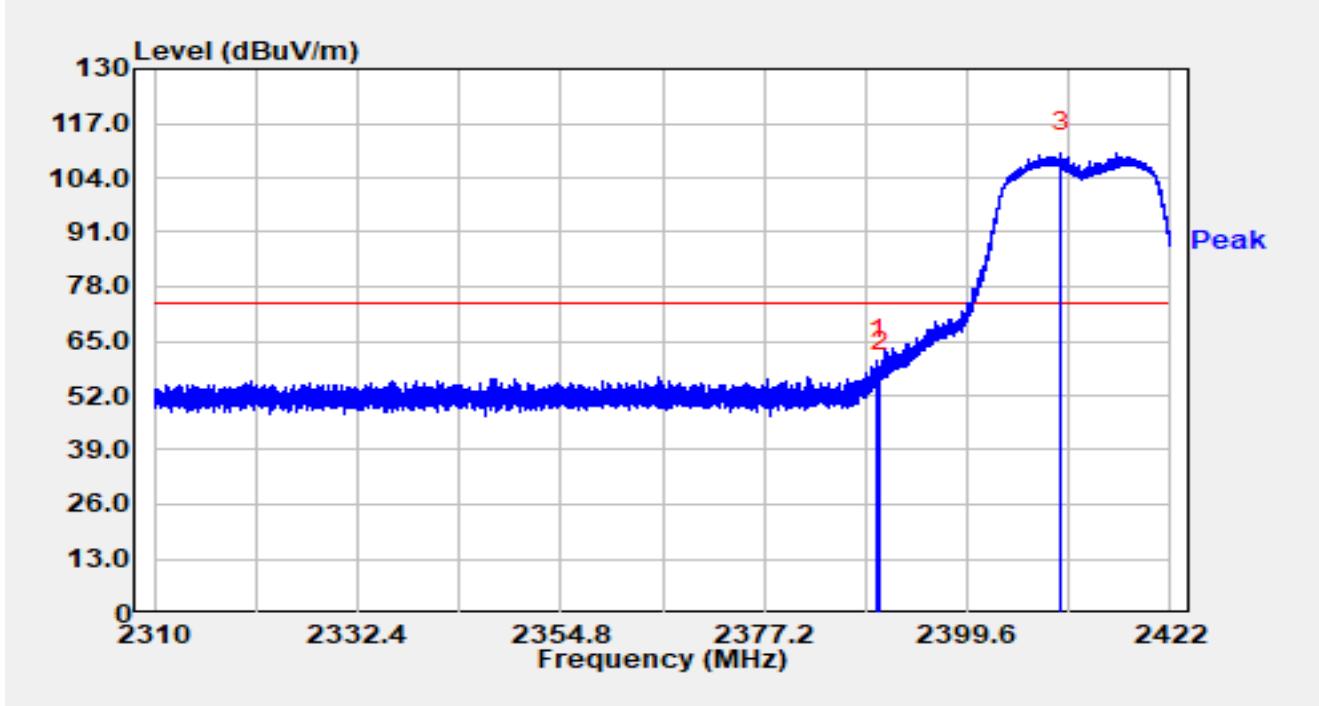


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2389.722	27.75	32.69	60.44	-13.56	74.00	Peak
2		2390.000	25.05	32.69	57.74	-16.26	74.00	Peak
3		2409.915	77.14	32.77	109.91	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-17
Temperature	16.8 °C	Humidity	44.7 %
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by VHT20 at 2412MHz		

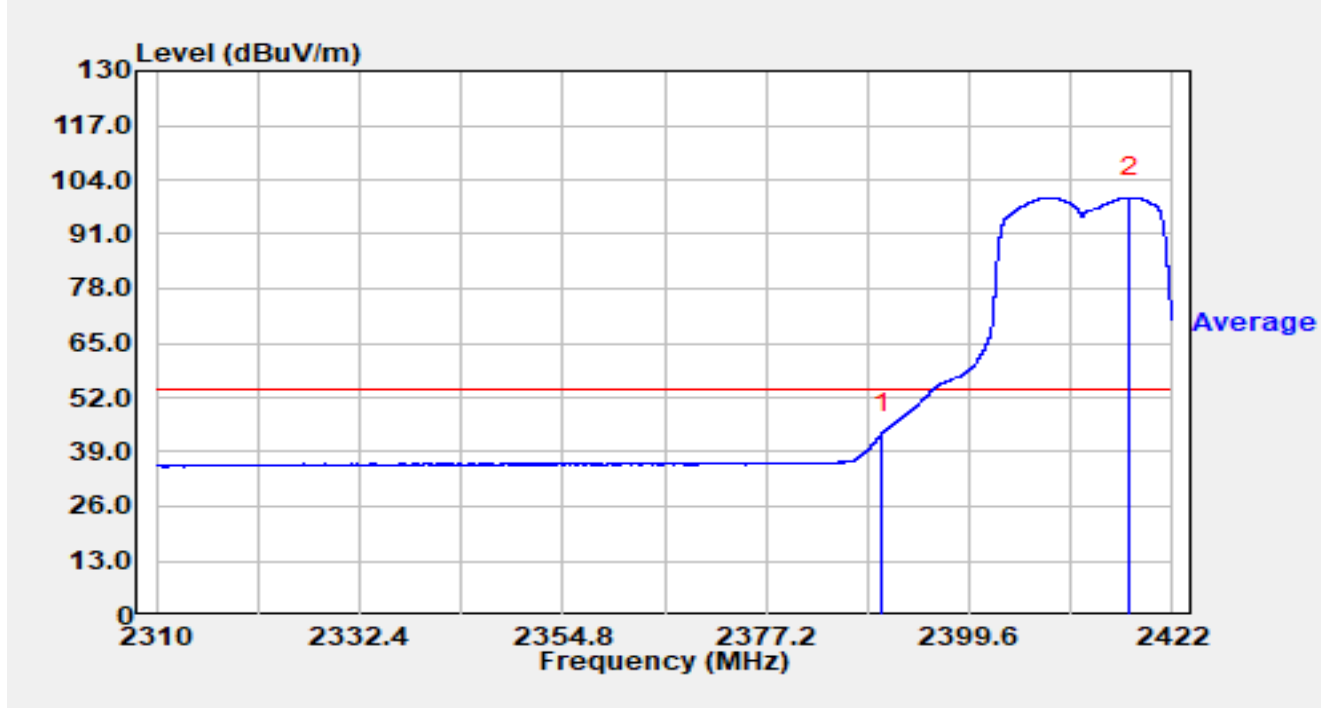


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2390.000	10.64	32.69	43.33	-10.67	54.00	Average
2		2417.296	67.00	32.81	99.81	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-17
Temperature	16.8 °C	Humidity	44.7 %
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by VHT20 at 2412MHz		

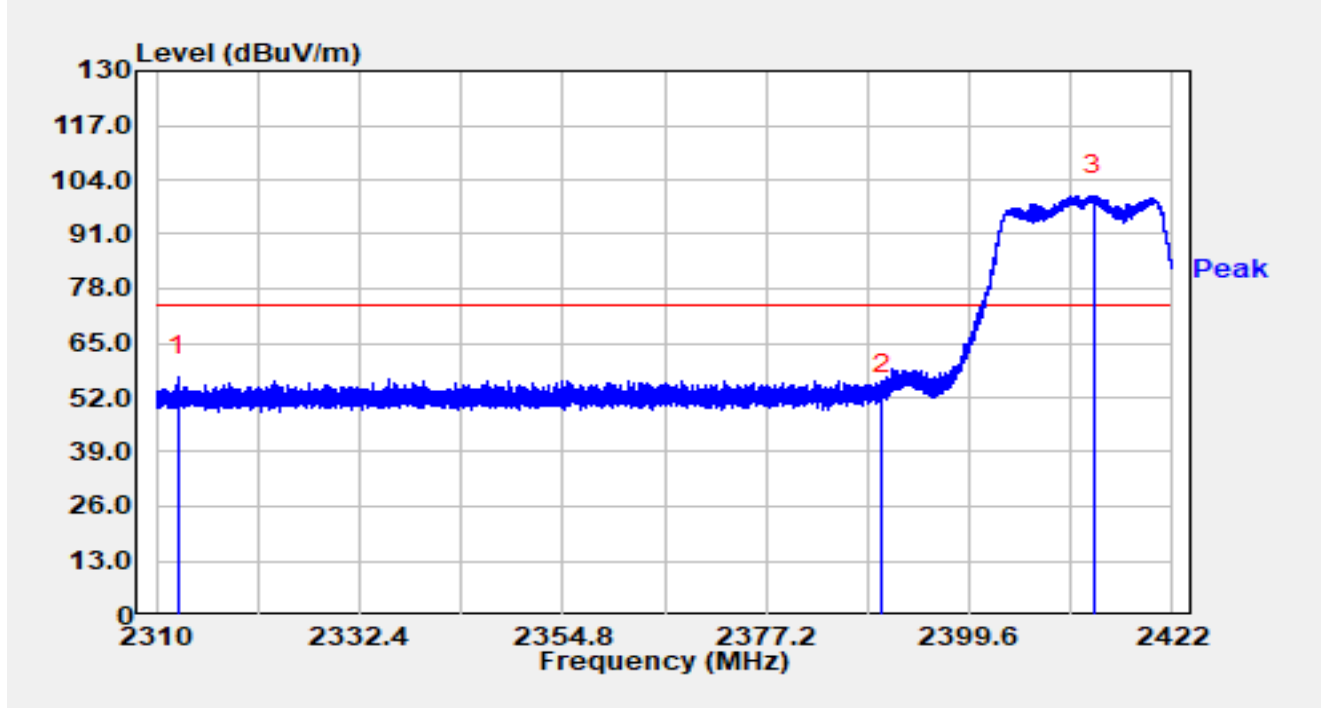


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2312.375	24.56	32.42	56.98	-17.02	74.00	Peak
2		2390.000	20.27	32.69	52.96	-21.04	74.00	Peak
3		2413.376	67.52	32.78	100.30	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-17
Temperature	16.8 °C	Humidity	44.7 %
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by VHT20 at 2412MHz		

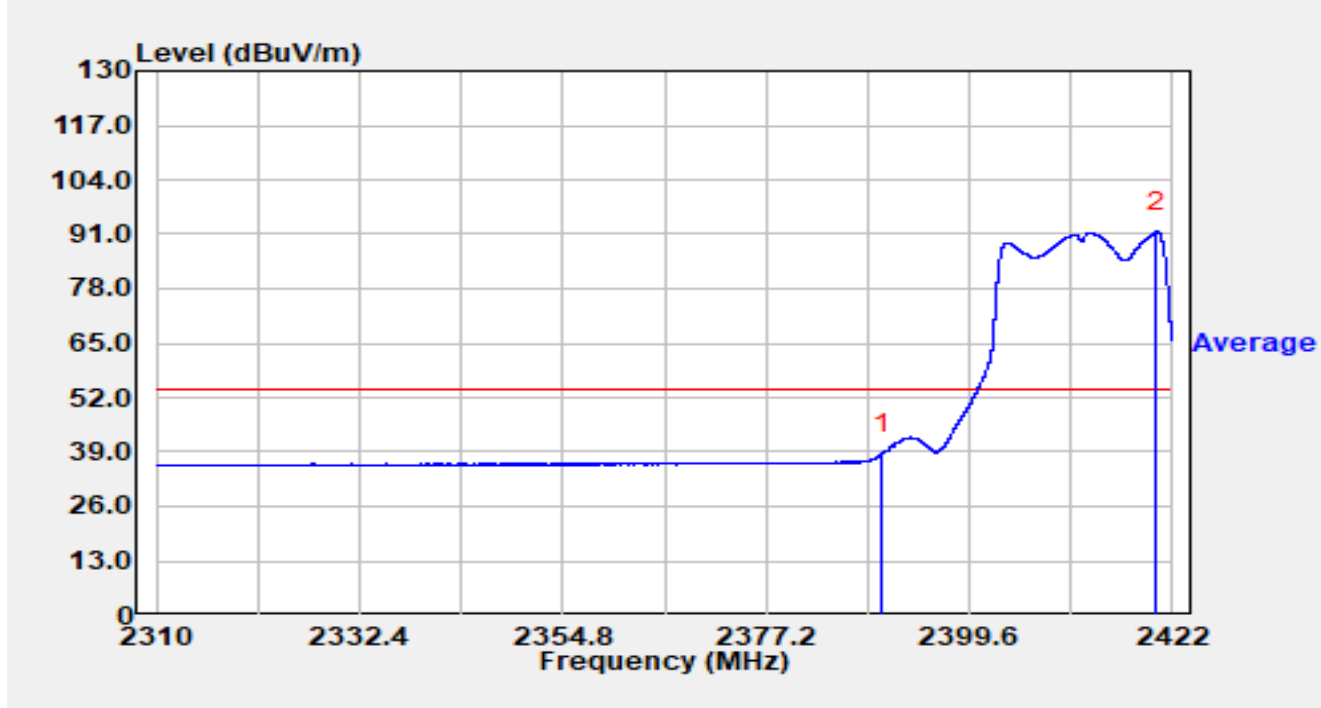


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2390.000	5.70	32.69	38.39	-15.61	54.00	Average
2		2420.253	58.68	32.83	91.51	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-17
Temperature	16.8 °C	Humidity	44.7 %
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by VHT20 at 2462MHz		

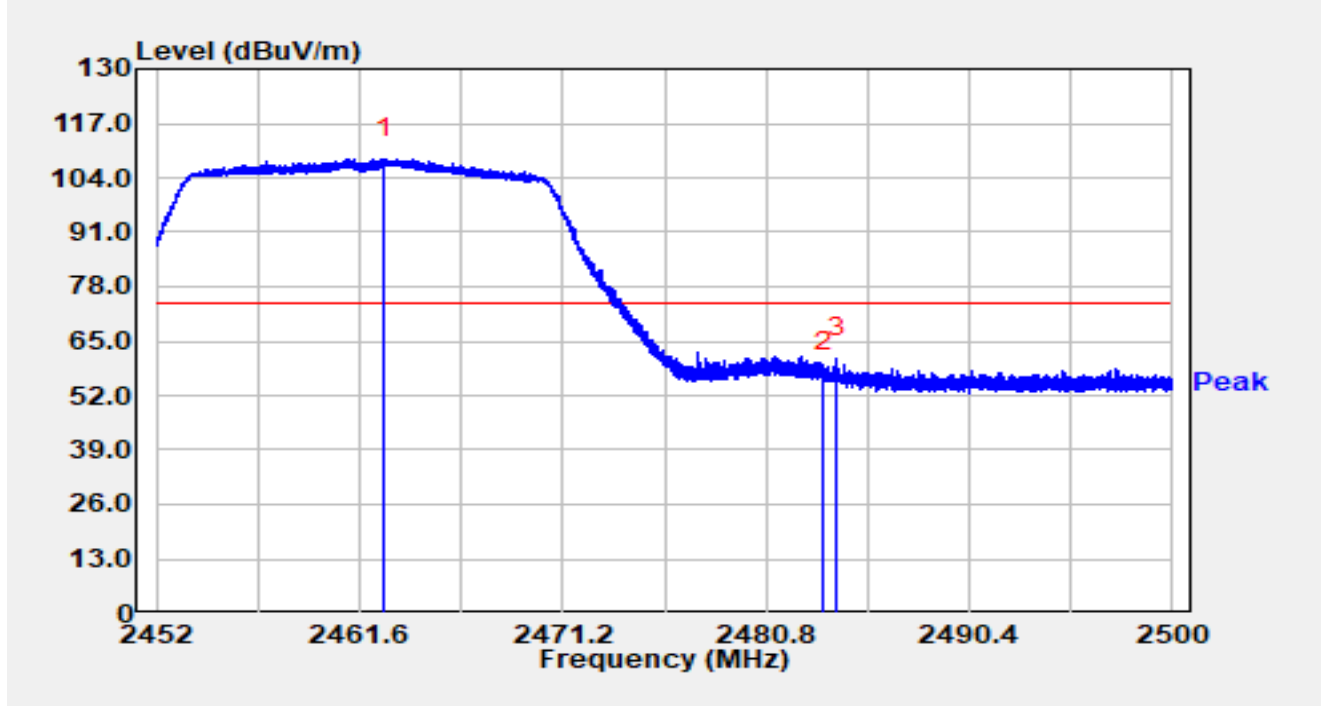


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2462.742	75.59	32.99	108.58	N/A	N/A	Peak
2		2483.500	24.31	33.13	57.44	-16.56	74.00	Peak
3	*	2484.150	27.72	33.13	60.85	-13.15	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-17
Temperature	16.8 °C	Humidity	44.7 %
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by VHT20 at 2462MHz		

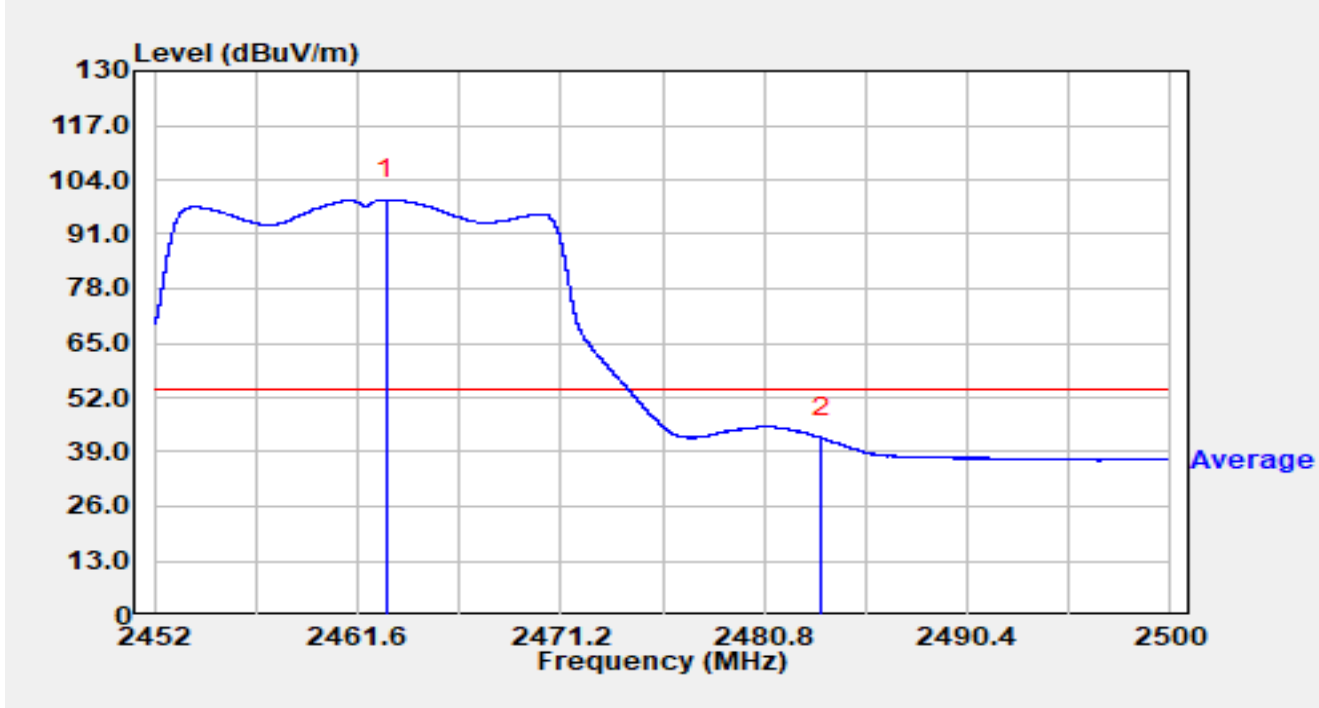


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2462.958	66.35	32.99	99.34	N/A	N/A	Average
2	*	2483.500	9.18	33.13	42.31	-11.69	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-17
Temperature	16.8 °C	Humidity	44.7 %
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by VHT20 at 2462MHz		

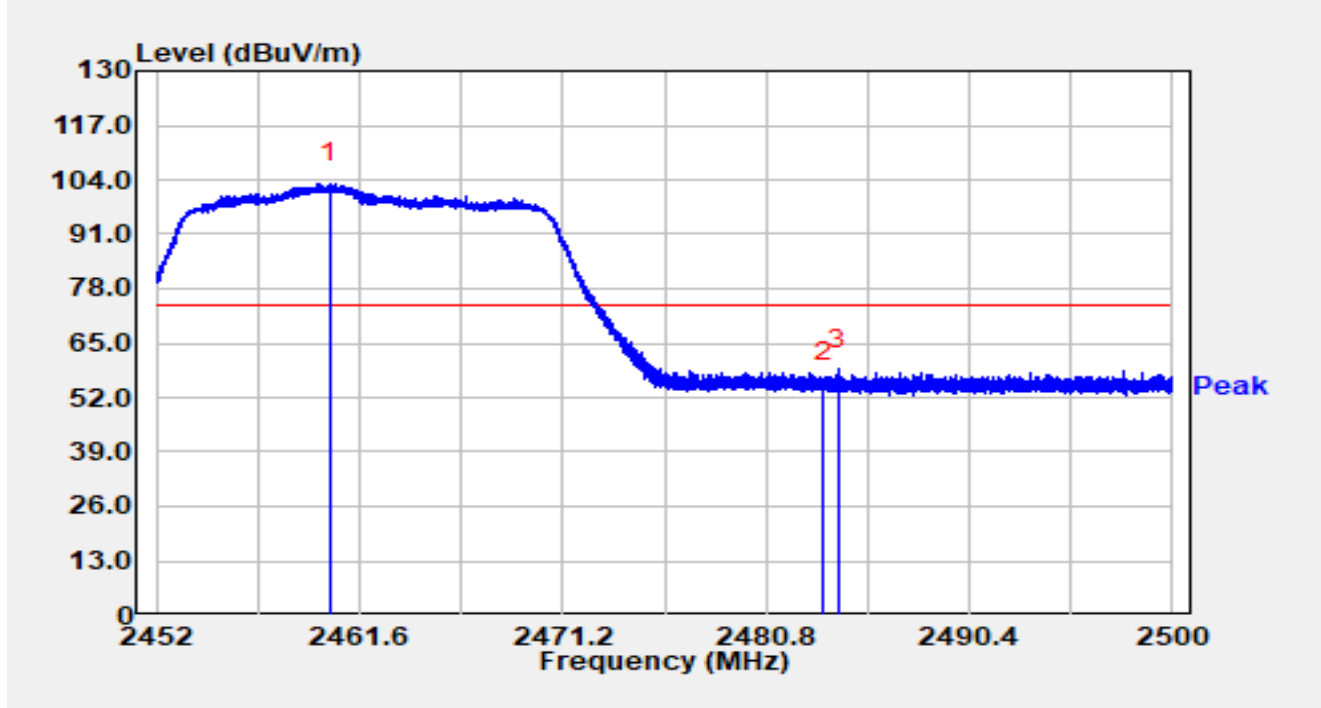


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2460.165	70.20	32.98	103.18	N/A	N/A	Peak
2		2483.500	22.47	33.13	55.60	-18.40	74.00	Peak
3	*	2484.198	25.51	33.13	58.65	-15.35	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-17
Temperature	16.8 °C	Humidity	44.7 %
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by VHT20 at 2462MHz		

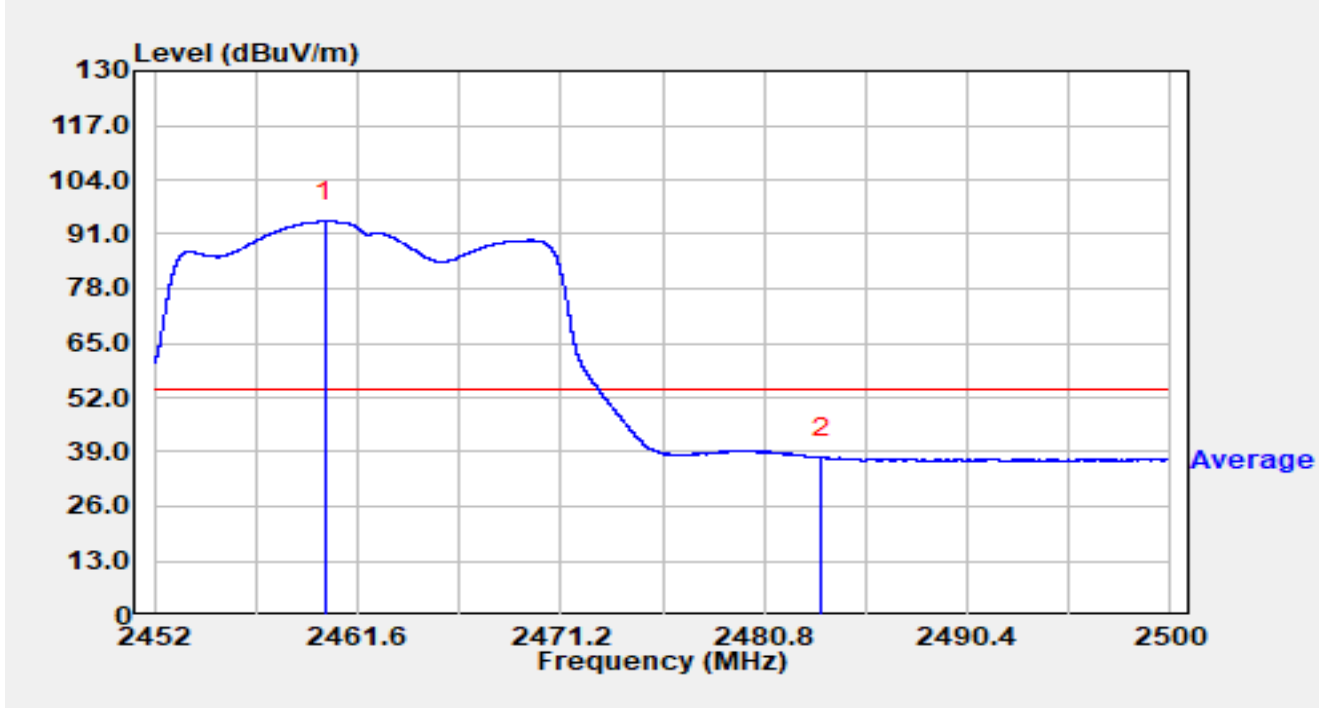


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2460.031	61.09	32.98	94.07	N/A	N/A	Average
2	*	2483.500	4.58	33.13	37.71	-16.29	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-17
Temperature	16.8 °C	Humidity	44.7 %
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by VHT40 at 2422MHz		

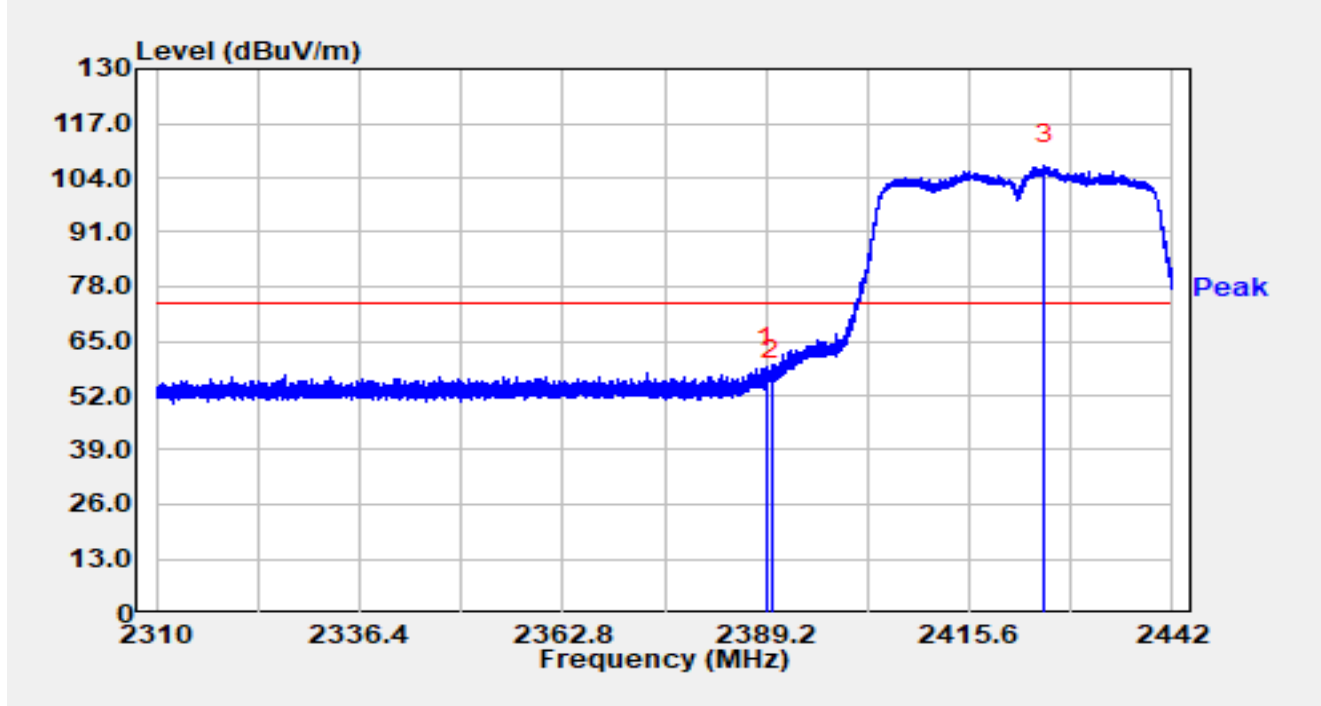


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2389.226	26.15	32.68	58.84	-15.16	74.00	Peak
2		2390.000	22.81	32.69	55.50	-18.50	74.00	Peak
3		2425.342	74.17	32.85	107.02	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-17
Temperature	16.8 °C	Humidity	44.7 %
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by VHT40 at 2422MHz		

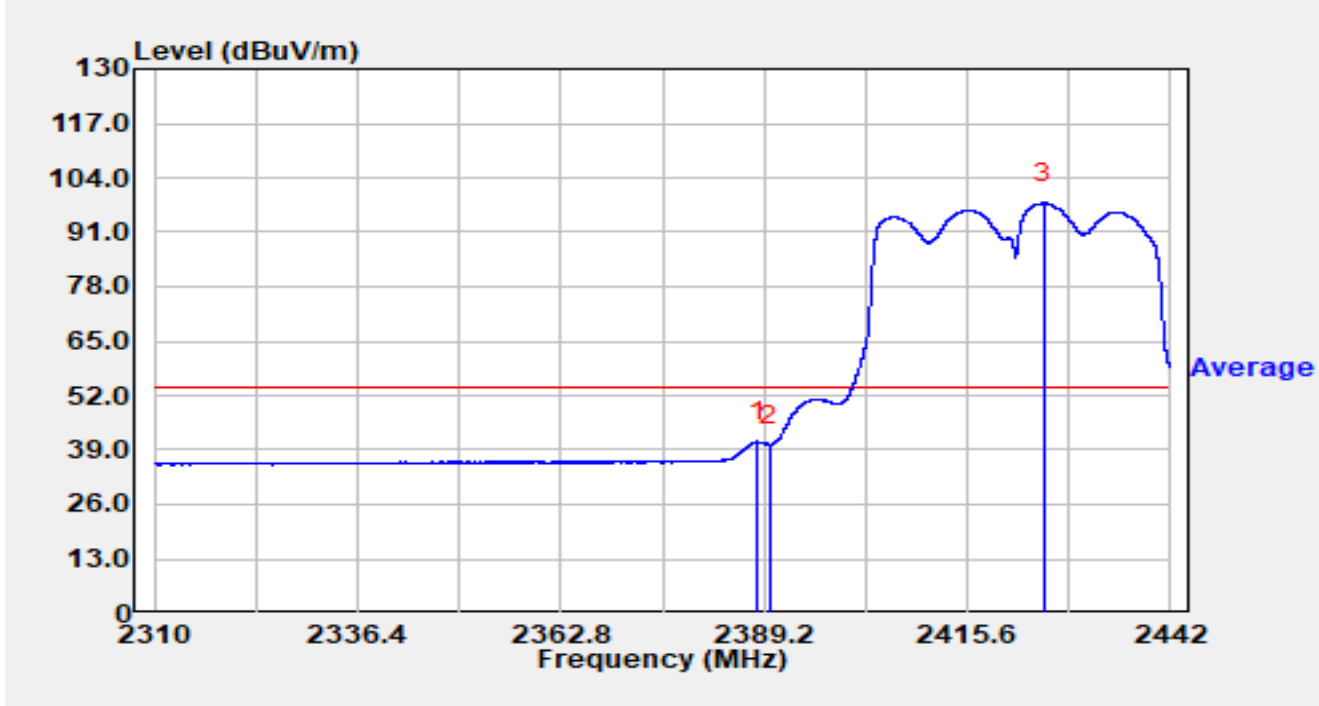


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2388.342	8.30	32.68	40.98	-13.02	54.00	Average
2		2390.000	7.45	32.69	40.14	-13.86	54.00	Average
3		2425.500	65.06	32.85	97.91	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-17
Temperature	16.8 °C	Humidity	44.7 %
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by VHT40 at 2422MHz		

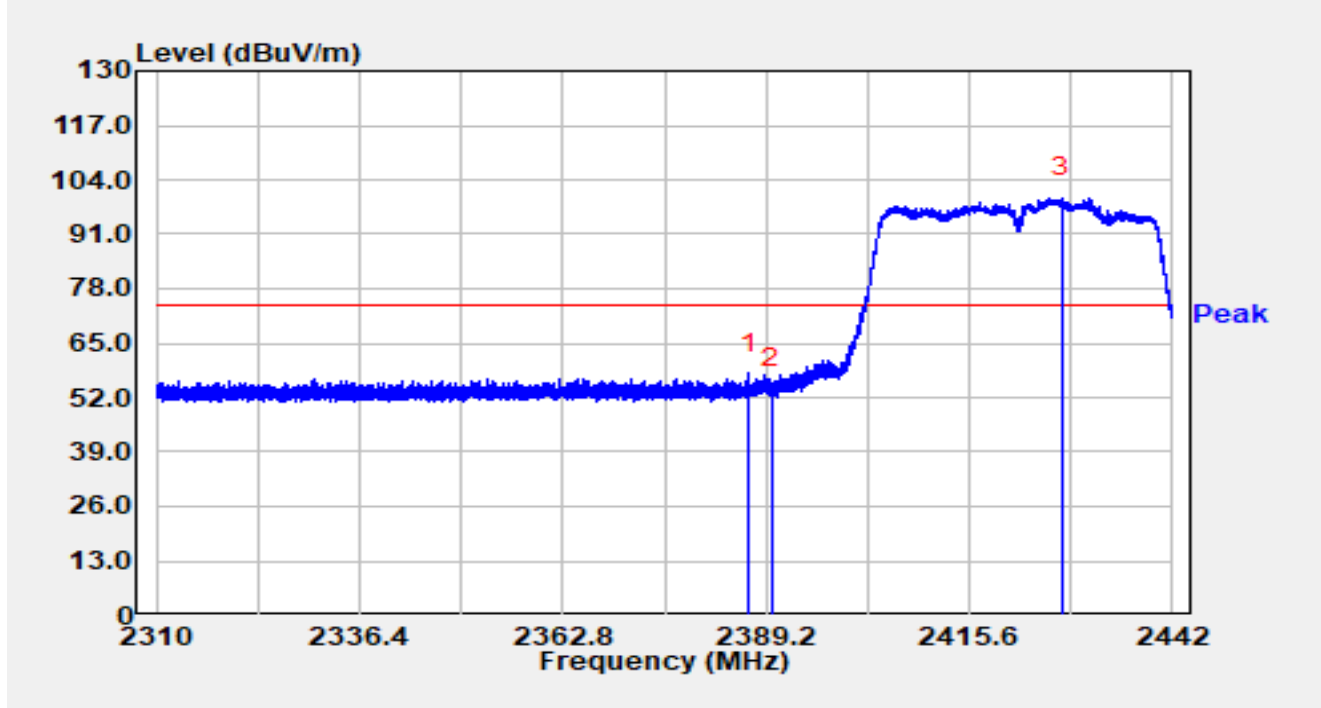


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2386.956	25.09	32.67	57.76	-16.24	74.00	Peak
2		2390.000	21.42	32.69	54.10	-19.90	74.00	Peak
3		2427.586	66.89	32.86	99.76	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-17
Temperature	16.8 °C	Humidity	44.7 %
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by VHT40 at 2422MHz		

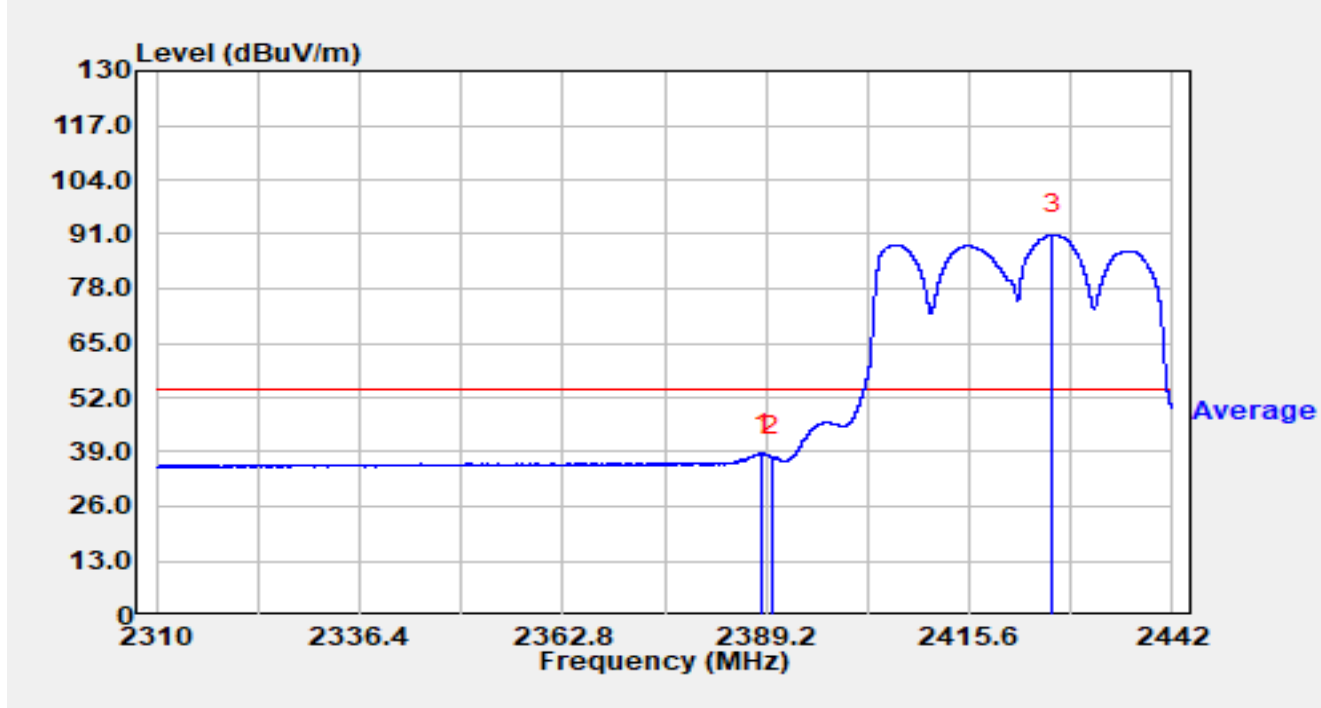


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2388.672	5.90	32.68	38.58	-15.42	54.00	Average
2		2390.000	5.19	32.69	37.88	-16.12	54.00	Average
3		2426.424	58.02	32.86	90.88	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-17
Temperature	16.8 °C	Humidity	44.7 %
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by VHT40 at 2452MHz		

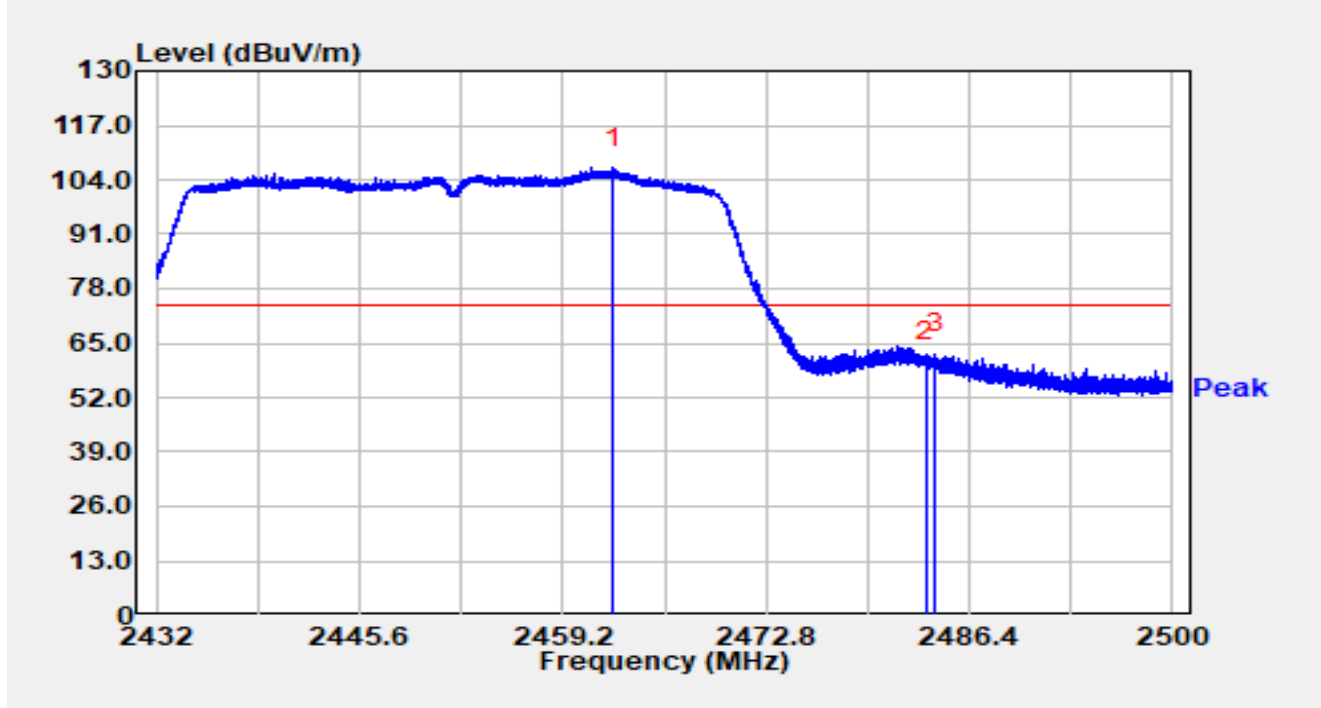


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2462.566	73.85	32.99	106.84	N/A	N/A	Peak
2		2483.500	27.24	33.13	60.37	-13.63	74.00	Peak
3	*	2484.170	29.31	33.13	62.44	-11.56	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-17
Temperature	16.8 °C	Humidity	44.7 %
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by VHT40 at 2452MHz		

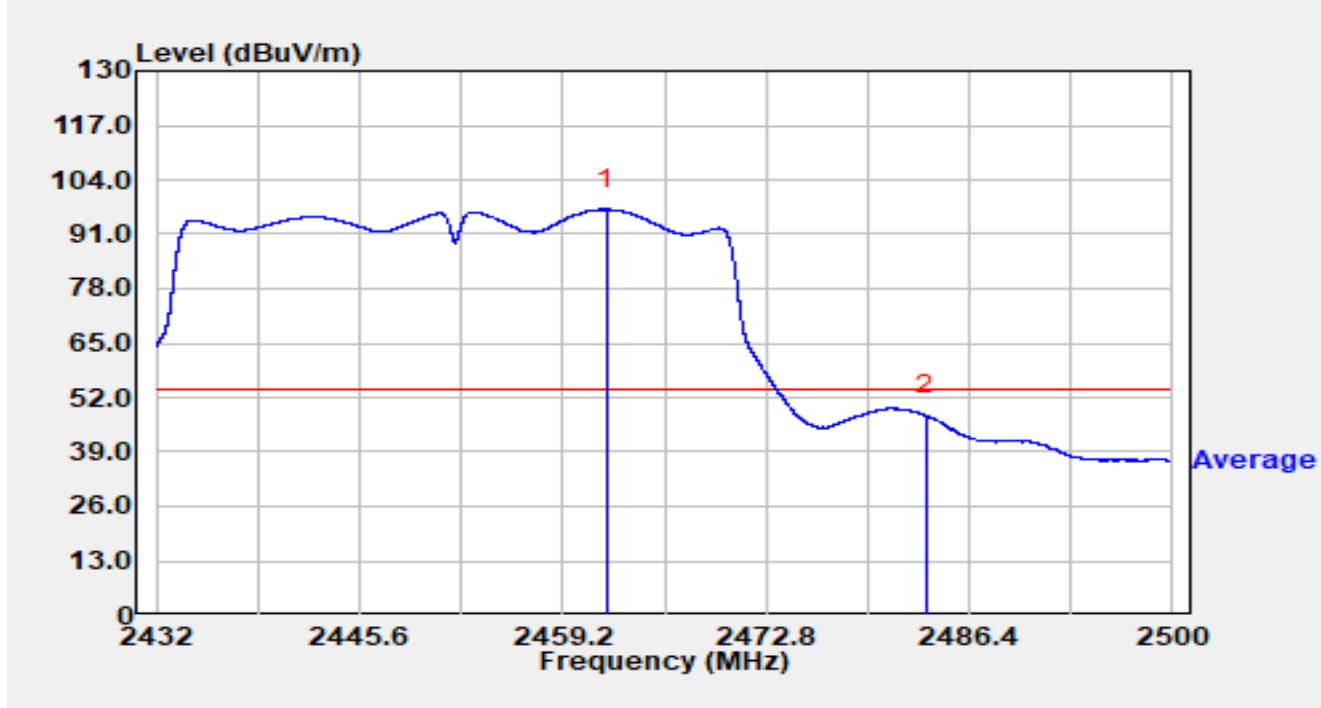


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2462.090	63.93	32.99	96.92	N/A	N/A	Average
2	*	2483.500	14.52	33.13	47.65	-6.35	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-17
Temperature	16.8 °C	Humidity	44.7 %
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by VHT40 at 2452MHz		

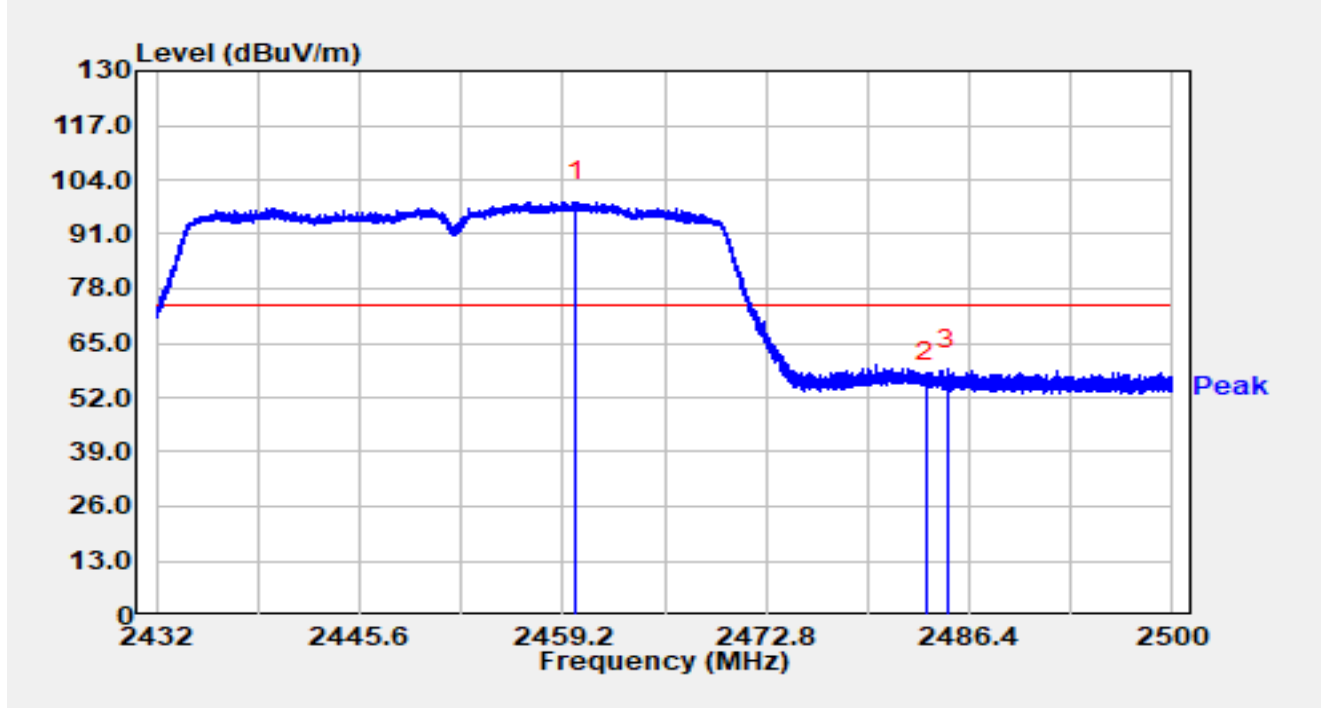


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2460.070	65.78	32.98	98.76	N/A	N/A	Peak
2		2483.500	22.67	33.13	55.80	-18.20	74.00	Peak
3	*	2484.945	25.65	33.14	58.79	-15.21	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-17
Temperature	16.8 °C	Humidity	44.7 %
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by VHT40 at 2452MHz		

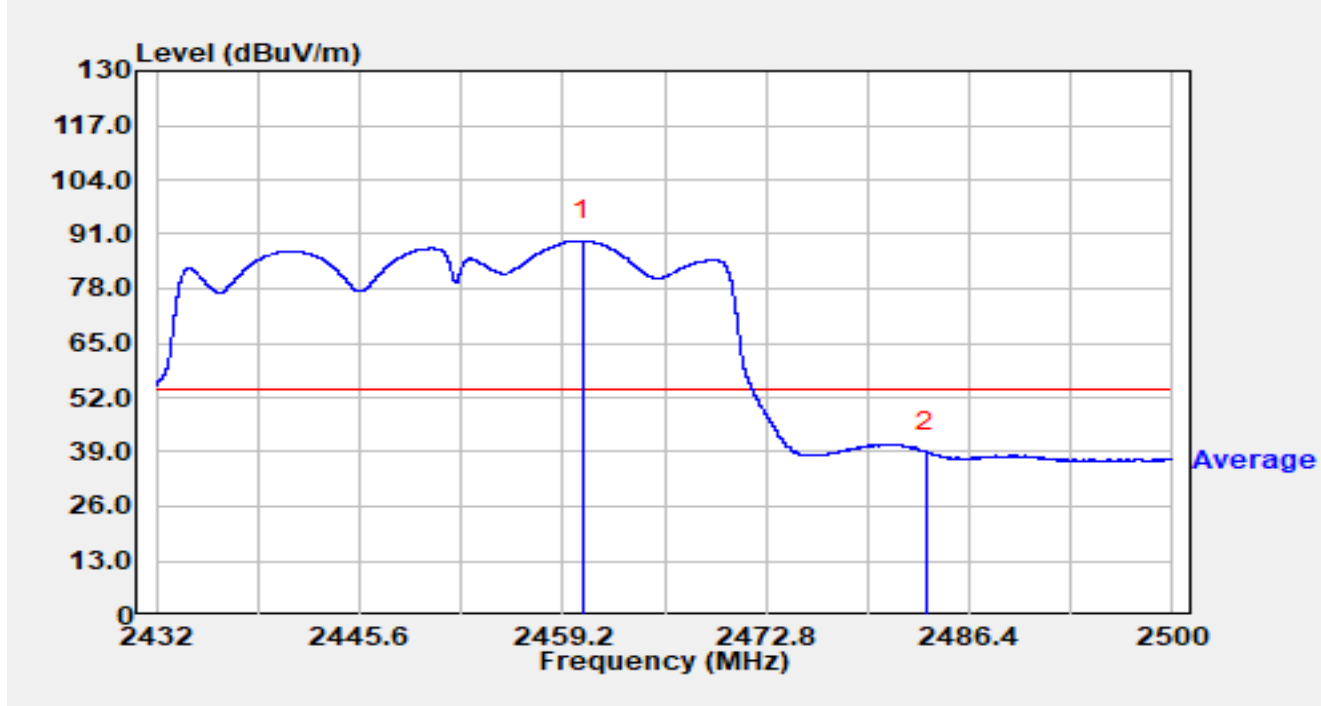


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2460.506	56.42	32.98	89.41	N/A	N/A	Average
2	*	2483.500	6.05	33.13	39.18	-14.82	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

A.8 AC Conducted Emissions Test Result

Site	SIP-SR2	Test Date	2025-02-07
Temperature	20.9 °C	Humidity	33.1 %
Limit	FCC Part 15.207_CE_Mains	Test Engineer	Henry Wang
Factor	ENV216_101684_E	Polarity	Line
EUT	Mobile Computer	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11b at 2412MHz		

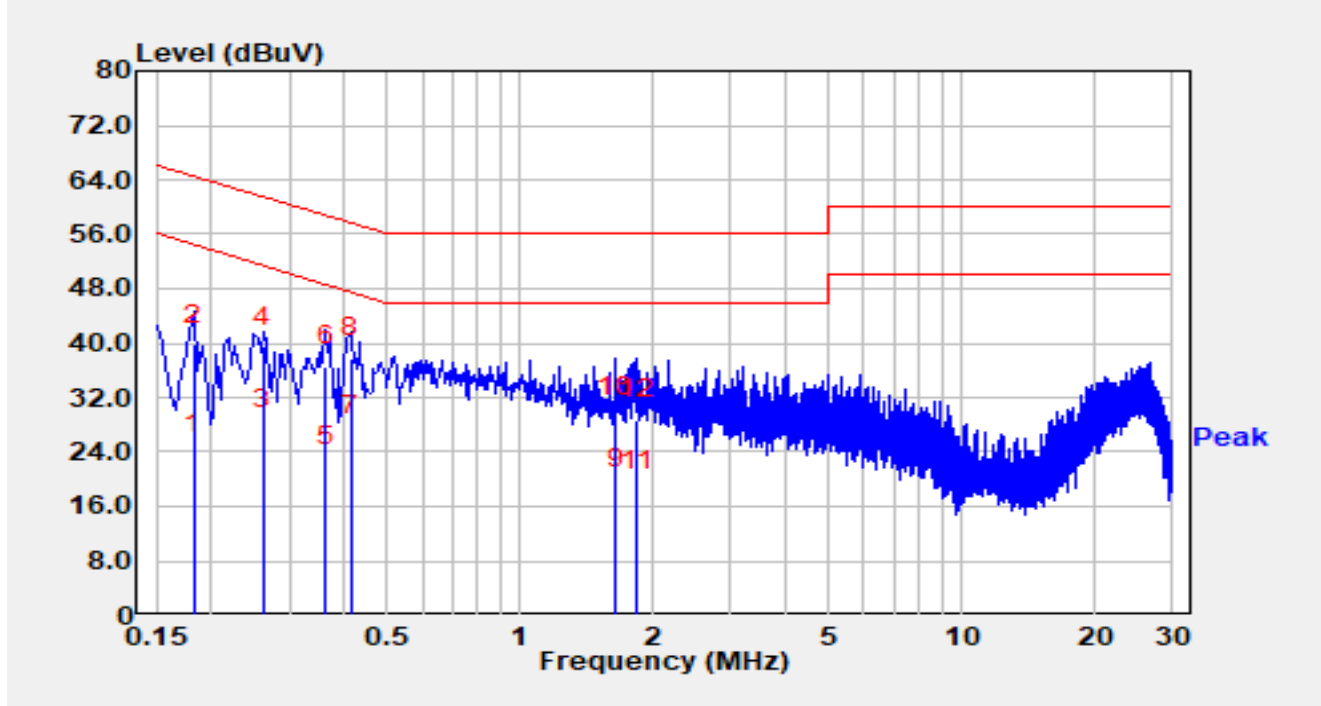


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.182	14.10	9.74	23.84	-30.56	54.39	Average
2		0.182	30.02	9.74	39.75	-24.64	64.39	QP
3		0.262	17.49	9.80	27.29	-24.08	51.37	Average
4		0.262	29.67	9.80	39.47	-21.90	61.37	QP
5		0.362	12.18	9.81	22.00	-26.69	48.68	Average
6		0.362	26.80	9.81	36.61	-22.07	58.68	QP
7		0.414	16.51	9.82	26.33	-21.23	47.57	Average
8	*	0.414	27.92	9.82	37.75	-19.82	57.57	QP
9		1.646	8.66	9.94	18.60	-27.40	46.00	Average
10		1.646	19.18	9.94	29.13	-26.87	56.00	QP
11		1.846	8.40	9.96	18.35	-27.65	46.00	Average
12		1.846	18.76	9.96	28.72	-27.28	56.00	QP

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
3. Measurement (dB μ V) = Reading (dB μ V) + C.F (dB).

Site	SIP-SR2	Test Date	2025-02-07
Temperature	20.9 °C	Humidity	33.1 %
Limit	FCC Part 15.207_CE_Mains	Test Engineer	Henry Wang
Factor	ENV216_101684_E	Polarity	Neutral
EUT	Mobile Computer	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11b at 2412MHz		

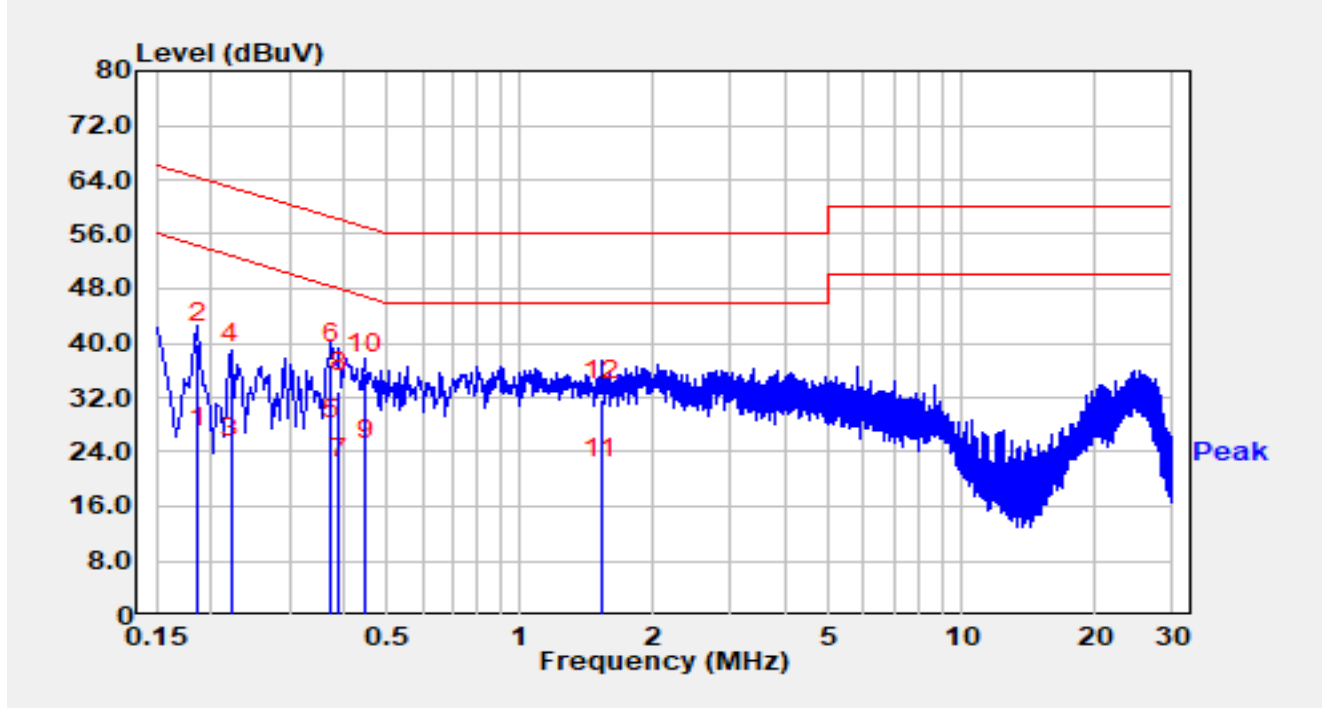

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.186	14.99	9.73	24.72	-29.49	54.21	Average
2		0.186	30.16	9.73	39.88	-24.33	64.21	QP
3		0.222	13.43	9.77	23.20	-29.55	52.74	Average
4		0.222	27.23	9.77	37.00	-25.75	62.74	QP
5		0.374	15.97	9.81	25.78	-22.63	48.41	Average
6		0.374	27.12	9.81	36.93	-21.49	58.41	QP
7		0.390	10.16	9.81	19.97	-28.10	48.06	Average
8		0.390	23.08	9.81	32.89	-25.18	58.06	QP
9		0.446	12.92	9.81	22.73	-24.22	46.95	Average
10	*	0.446	25.78	9.81	35.59	-21.36	56.95	QP
11		1.530	10.29	9.90	20.19	-25.81	46.00	Average
12		1.530	21.75	9.90	31.66	-24.34	56.00	QP

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
3. Measurement (dB μ V) = Reading (dB μ V) + C.F (dB).

Appendix B – Test Setup Photograph

Refer to “2412RSU045-UT” file.

Appendix C – EUT Photograph

Refer to “2412RSU045-UE” file.

The End
