



BLE-500kbps Out-of-Band Emissions

Channel 00 (2402MHz)

100kHz PSD Reference Level

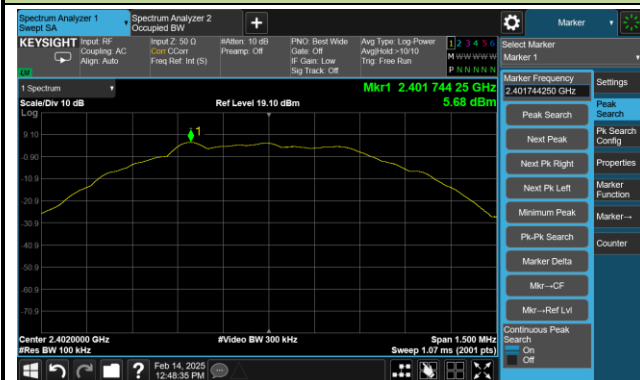

Low Band Edge

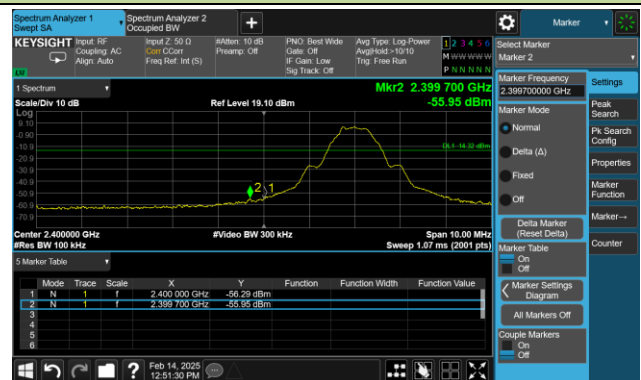


Spurious Emission 30MHz ~ 25GHz



Channel 19 (2440MHz)

100kHz PSD Reference Level

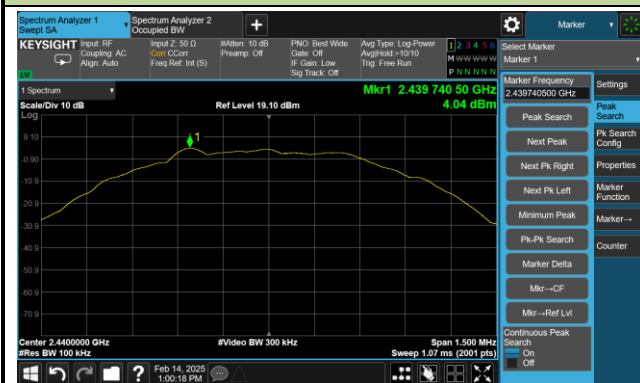


Spurious Emission 30MHz ~ 25GHz




Channel 39 (2480MHz)


100kHz PSD Reference Level

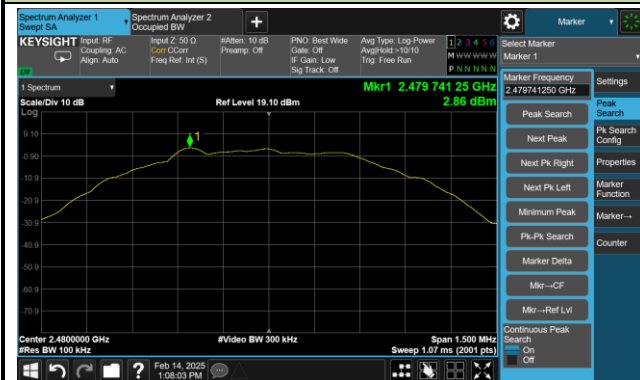

High Band Edge

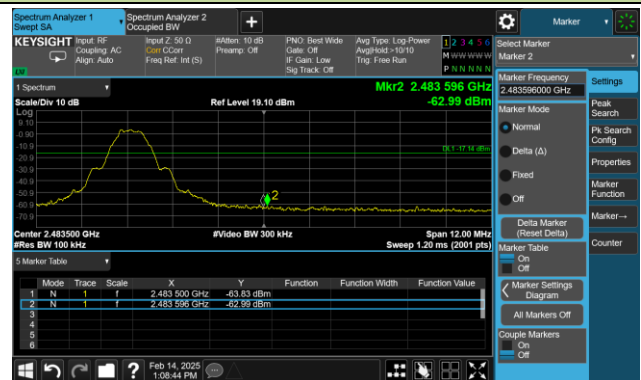

Spurious Emission 30MHz ~ 25GHz

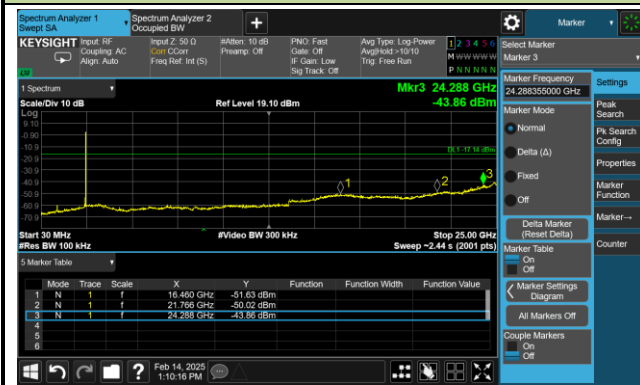

A.6 Radiated Spurious Emission Test Result

Test Data for EUT with Engine S0803FR

Test Site	SIP-AC3	Test Engineer	Fusco Pan
Test Date	2025-01-24	Test Mode:	BLE-1Mbps
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
00	8192.7	47.5	-2.2	45.3	74.0	-28.7	Peak	Horizontal
	11111.6	47.1	1.3	48.4	74.0	-25.6	Peak	Horizontal
	15961.7	44.7	7.4	52.1	74.0	-21.9	Peak	Horizontal
	15961.7	33.6	7.4	41.0	54.0	-13.0	Average	Horizontal
	8180.8	48.1	-2.3	45.8	74.0	-28.2	Peak	Vertical
	11098.0	46.4	1.4	47.8	74.0	-26.2	Peak	Vertical
	15977.0	45.0	6.6	51.6	74.0	-22.4	Peak	Vertical
	15977.0	33.5	6.6	40.1	54.0	-13.9	Average	Vertical
19	8162.1	46.9	-2.4	44.5	74.0	-29.5	Peak	Horizontal
	10851.5	46.2	1.4	47.6	74.0	-26.4	Peak	Horizontal
	16152.1	44.9	6.3	51.2	74.0	-22.8	Peak	Horizontal
	16152.1	33.0	6.3	39.3	54.0	-14.7	Average	Horizontal
	8134.9	47.8	-2.5	45.3	74.0	-28.7	Peak	Vertical
	11565.5	47.5	0.5	48.0	74.0	-26.0	Peak	Vertical
	15939.6	44.9	6.7	51.6	74.0	-22.4	Peak	Vertical
	15939.6	33.5	6.7	40.2	54.0	-13.8	Average	Vertical
39	9423.5	47.0	-1.4	45.6	74.0	-28.4	Peak	Horizontal
	10824.3	47.8	1.4	49.2	74.0	-24.8	Peak	Horizontal
	16048.4	44.4	6.8	51.2	74.0	-22.8	Peak	Horizontal
	16048.4	33.7	6.8	40.5	54.0	-13.5	Average	Horizontal
	9355.5	46.4	-1.2	45.2	74.0	-28.8	Peak	Vertical
	11101.4	46.4	1.4	47.8	74.0	-26.2	Peak	Vertical
	15832.5	44.4	6.2	50.6	74.0	-23.4	Peak	Vertical

Notes:

1. Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

2. Average measurement was not performed when the peak level lower than average limit

Test Site	SIP-AC3	Test Engineer	Fusco Pan
Test Date	2025-01-24	Test Mode:	BLE-2Mbps
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
00	9139.6	46.9	-1.6	45.3	74.0	-28.7	Peak	Horizontal
	11113.3	47.2	1.2	48.4	74.0	-25.6	Peak	Horizontal
	15960.0	43.8	7.5	51.3	74.0	-22.7	Peak	Horizontal
	15960.0	34.2	7.5	41.7	54.0	-12.3	Average	Horizontal
	11099.7	47.2	1.4	48.6	74.0	-25.4	Peak	Vertical
	15961.7	43.9	7.4	51.3	74.0	-22.7	Peak	Vertical
	15961.7	33.6	7.4	41.0	54.0	-13.0	Average	Vertical
	17971.1	44.7	11.3	56.0	74.0	-18.0	Peak	Vertical
	17971.1	30.2	11.3	41.5	54.0	-12.5	Average	Vertical
19	9039.3	47.0	-1.8	45.2	74.0	-28.8	Peak	Horizontal
	10979.0	47.9	1.0	48.9	74.0	-25.1	Peak	Horizontal
	15956.6	44.0	7.4	51.4	74.0	-22.6	Peak	Horizontal
	15956.6	33.5	7.4	40.9	54.0	-13.1	Average	Horizontal
	9350.4	46.6	-1.3	45.3	74.0	-28.7	Peak	Vertical
	11533.2	47.3	0.4	47.7	74.0	-26.3	Peak	Vertical
	15965.1	44.8	7.3	52.1	74.0	-21.9	Peak	Vertical
	15965.1	33.6	7.3	40.9	54.0	-13.1	Average	Vertical
39	9445.6	47.0	-1.1	45.9	74.0	-28.1	Peak	Horizontal
	11502.6	46.8	0.7	47.5	74.0	-26.5	Peak	Horizontal
	16046.7	43.7	6.9	50.6	74.0	-23.4	Peak	Horizontal
	9105.6	48.7	-1.8	46.9	74.0	-27.1	Peak	Vertical
	11109.9	46.3	1.3	47.6	74.0	-26.4	Peak	Vertical
	15958.3	43.4	7.5	50.9	74.0	-23.1	Peak	Vertical

Notes:

1. Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

2. Average measurement was not performed when the peak level lower than average limit

Test Site	SIP-AC3	Test Engineer	Fusco Pan
Test Date	2025-01-24	Test Mode:	BLE-125kbps
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
00	8092.4	46.9	-2.3	44.6	74.0	-29.4	Peak	Horizontal
	11089.5	45.8	1.5	47.3	74.0	-26.7	Peak	Horizontal
	15939.6	44.6	6.7	51.3	74.0	-22.7	Peak	Horizontal
	15939.6	34.1	6.7	40.8	54.0	-13.2	Average	Horizontal
	9052.9	46.7	-1.9	44.8	74.0	-29.2	Peak	Vertical
	11502.6	46.8	0.7	47.5	74.0	-26.5	Peak	Vertical
	15960.0	43.9	7.5	51.4	74.0	-22.6	Peak	Vertical
	15960.0	33.7	7.5	41.2	54.0	-12.8	Average	Vertical
19	8163.8	47.0	-2.4	44.6	74.0	-29.4	Peak	Horizontal
	11499.2	47.0	0.8	47.8	74.0	-26.2	Peak	Horizontal
	15966.8	44.2	7.2	51.4	74.0	-22.6	Peak	Horizontal
	15966.8	33.5	7.2	40.7	54.0	-13.3	Average	Horizontal
	8199.5	46.7	-2.3	44.4	74.0	-29.6	Peak	Vertical
	11128.6	47.4	0.8	48.2	74.0	-25.8	Peak	Vertical
	15956.6	43.7	7.4	51.1	74.0	-22.9	Peak	Vertical
	15956.6	35.2	7.4	42.6	54.0	-11.4	Average	Vertical
39	8226.7	47.7	-2.7	45.0	74.0	-29.0	Peak	Horizontal
	11084.4	46.1	1.5	47.6	74.0	-26.4	Peak	Horizontal
	15852.9	45.4	5.9	51.3	74.0	-22.7	Peak	Horizontal
	15852.9	34.2	5.9	40.1	54.0	-13.9	Average	Horizontal
	8157.0	47.2	-2.4	44.8	74.0	-29.2	Peak	Vertical
	11120.1	46.6	1.1	47.7	74.0	-26.3	Peak	Vertical
	15960.0	44.2	7.5	51.7	74.0	-22.3	Peak	Vertical
	15960.0	33.6	7.5	41.1	54.0	-12.9	Average	Vertical

Notes:

1. Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

2. Average measurement was not performed when the peak level lower than average limit

Test Site	SIP-AC3	Test Engineer	Fusco Pan
Test Date	2025-01-24	Test Mode:	BLE-500kbps
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
00	8177.4	47.0	-2.3	44.7	74.0	-29.3	Peak	Horizontal
	11342.8	46.6	0.4	47.0	74.0	-27.0	Peak	Horizontal
	15961.7	43.3	7.4	50.7	74.0	-23.3	Peak	Horizontal
	9472.8	46.2	-0.9	45.3	74.0	-28.7	Peak	Vertical
	11489.0	47.4	0.9	48.3	74.0	-25.7	Peak	Vertical
	15842.7	44.9	6.3	51.2	74.0	-22.8	Peak	Vertical
	15842.7	33.6	6.3	39.9	54.0	-14.1	Average	Vertical
19	9085.2	47.6	-2.0	45.6	74.0	-28.4	Peak	Horizontal
	11109.9	46.8	1.3	48.1	74.0	-25.9	Peak	Horizontal
	15722.0	44.1	6.6	50.7	74.0	-23.3	Peak	Horizontal
	9494.9	46.6	-1.1	45.5	74.0	-28.5	Peak	Vertical
	11592.7	47.8	0.6	48.4	74.0	-25.6	Peak	Vertical
	15948.1	43.9	7.1	51.0	74.0	-23.0	Peak	Vertical
39	9029.1	46.6	-1.8	44.8	74.0	-29.2	Peak	Horizontal
	11074.2	46.6	1.4	48.0	74.0	-26.0	Peak	Horizontal
	15958.3	43.3	7.5	50.8	74.0	-23.2	Peak	Horizontal
	8094.1	47.3	-2.4	44.9	74.0	-29.1	Peak	Vertical
	10843.0	46.4	1.4	47.8	74.0	-26.2	Peak	Vertical
	15966.8	43.9	7.2	51.1	74.0	-22.9	Peak	Vertical
	15966.8	33.5	7.2	40.7	54.0	-13.3	Average	Vertical

Notes:


1. Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

2. Average measurement was not performed when the peak level lower than average limit

The Result of Radiated Emission below 1GHz:

Site	SIP-AC1	Test Date	2025-01-24
Temperature	15.1 °C	Humidity	41.1 %
Limit	FCC_Part15.209_RSE(3m)	Test Engineer	Mero Zhou
Factor	VULB 9168_00998	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by BLE_125kbps at 2440MHz		

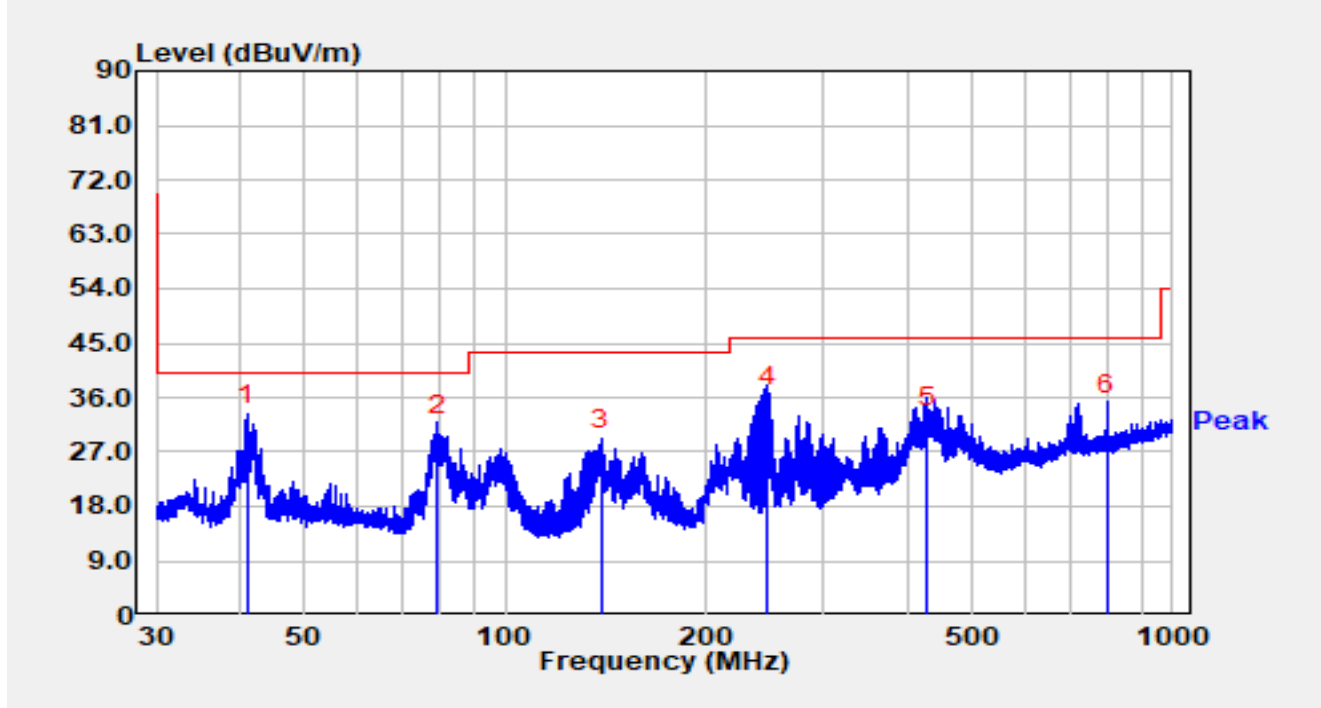


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	40.974	13.50	17.88	31.38	-8.62	40.00	QP
2		79.076	15.60	14.24	29.84	-10.16	40.00	QP
3		139.020	9.30	17.93	27.23	-16.27	43.50	QP
4		247.682	17.60	16.86	34.46	-11.54	46.00	QP
5		429.372	8.60	22.32	30.92	-15.08	46.00	QP
6		798.420	3.80	29.38	33.18	-12.82	46.00	QP

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

Site	SIP-AC1	Test Date	2025-01-24
Temperature	15.1 °C	Humidity	41.1 %
Limit	FCC_Part15.209_RSE(3m)	Test Engineer	Mero Zhou
Factor	VULB 9168_00998	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by BLE_125kbps at 2440MHz		

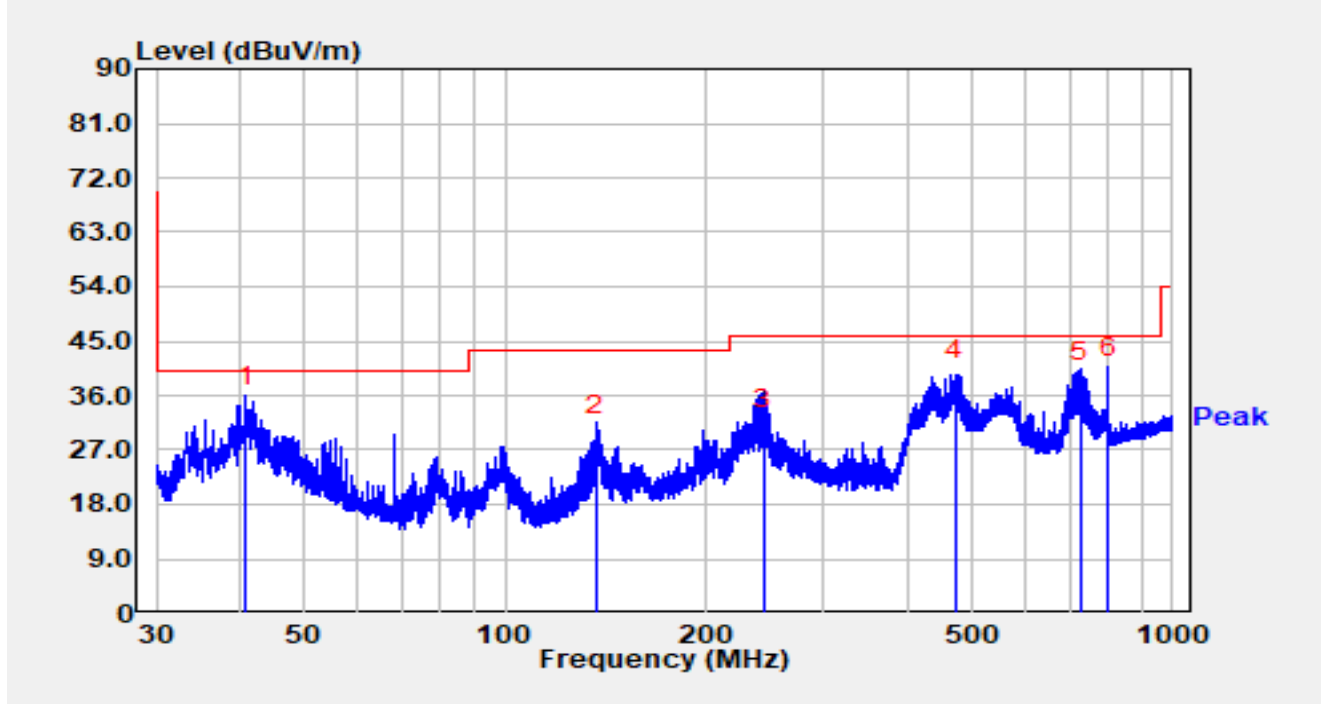

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	40.902	16.20	17.87	34.07	-5.93	40.00	QP
2		136.795	11.70	17.67	29.37	-14.13	43.50	QP
3		244.403	13.60	16.83	30.43	-15.57	46.00	QP
4		471.680	15.30	23.15	38.45	-7.55	46.00	QP
5		726.296	9.90	28.34	38.24	-7.76	46.00	QP
6		799.540	9.40	29.35	38.75	-7.25	46.00	QP

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

Test Data for EUT with Engine S0703

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-02-26	Test Mode:	BLE-125kbps
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
19	11123.5	48.5	-1.3	47.2	74.0	-26.8	Peak	Horizontal
	15924.3	45.9	5.8	51.7	74.0	-22.3	Peak	Horizontal
	15924.3	33.5	5.8	39.3	54.0	-14.7	Average	Horizontal
	18000.0	43.9	9.8	53.7	74.0	-20.3	Peak	Horizontal
	18000.0	31.5	9.8	41.3	54.0	-12.7	Average	Horizontal
	12340.7	46.5	-0.7	45.8	74.0	-28.2	Peak	Vertical
	15830.8	45.5	6.0	51.5	74.0	-22.5	Peak	Vertical
	15830.8	32.5	6.0	38.5	54.0	-15.5	Average	Vertical
	17972.8	42.5	10.4	52.9	74.0	-21.1	Peak	Vertical
	17972.8	31.0	10.4	41.4	54.0	-12.6	Average	Vertical


Notes:

- Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)
- Average measurement was not performed when the peak level lower than average limit

A.7 Radiated Restricted Band Edge Test Result

Test Data for EUT with Engine S0803FR

Site	SIP-AC3	Test Date	2025-01-23
Temperature	16.3 °C	Humidity	45.2 %
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by BLE_1M at 2402MHz		

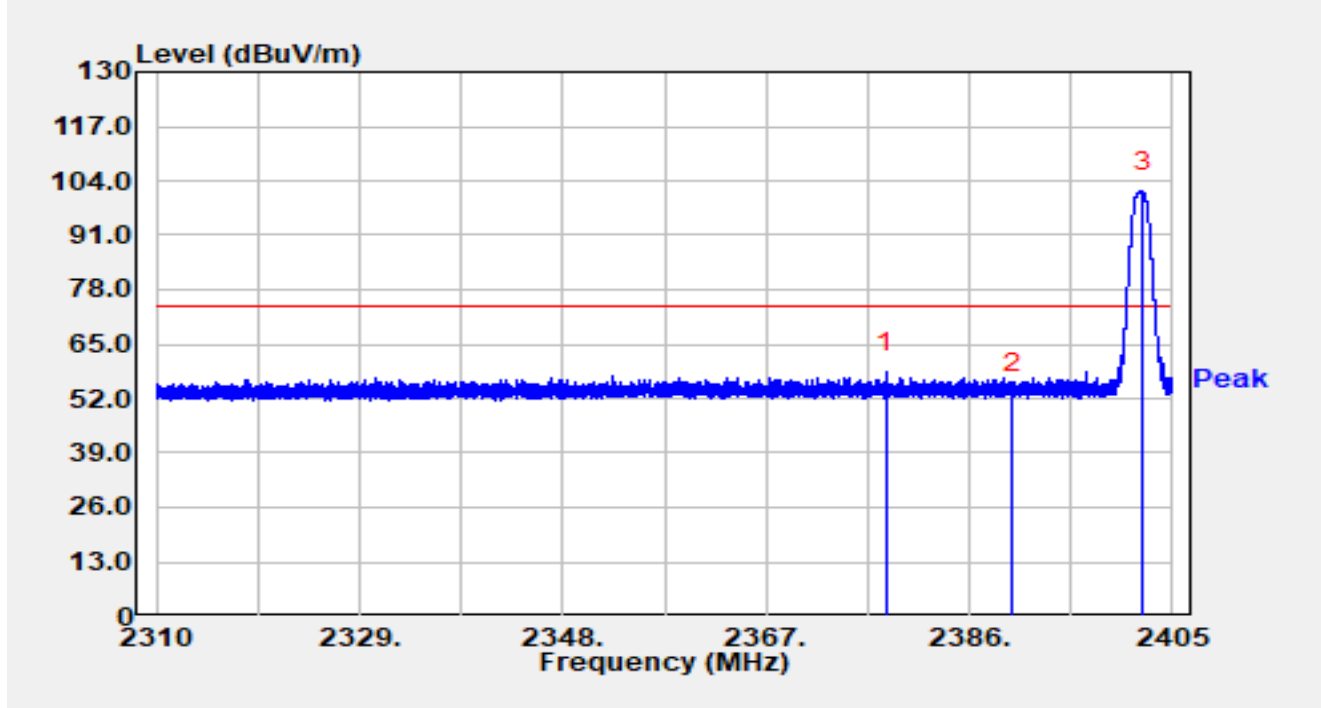


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2378.163	25.55	32.64	58.19	-15.81	74.00	Peak
2		2390.000	20.70	32.69	53.39	-20.61	74.00	Peak
3		2402.254	68.62	32.74	101.36	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-23
Temperature	16.3 °C	Humidity	45.2 %
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by BLE_1M at 2402MHz		

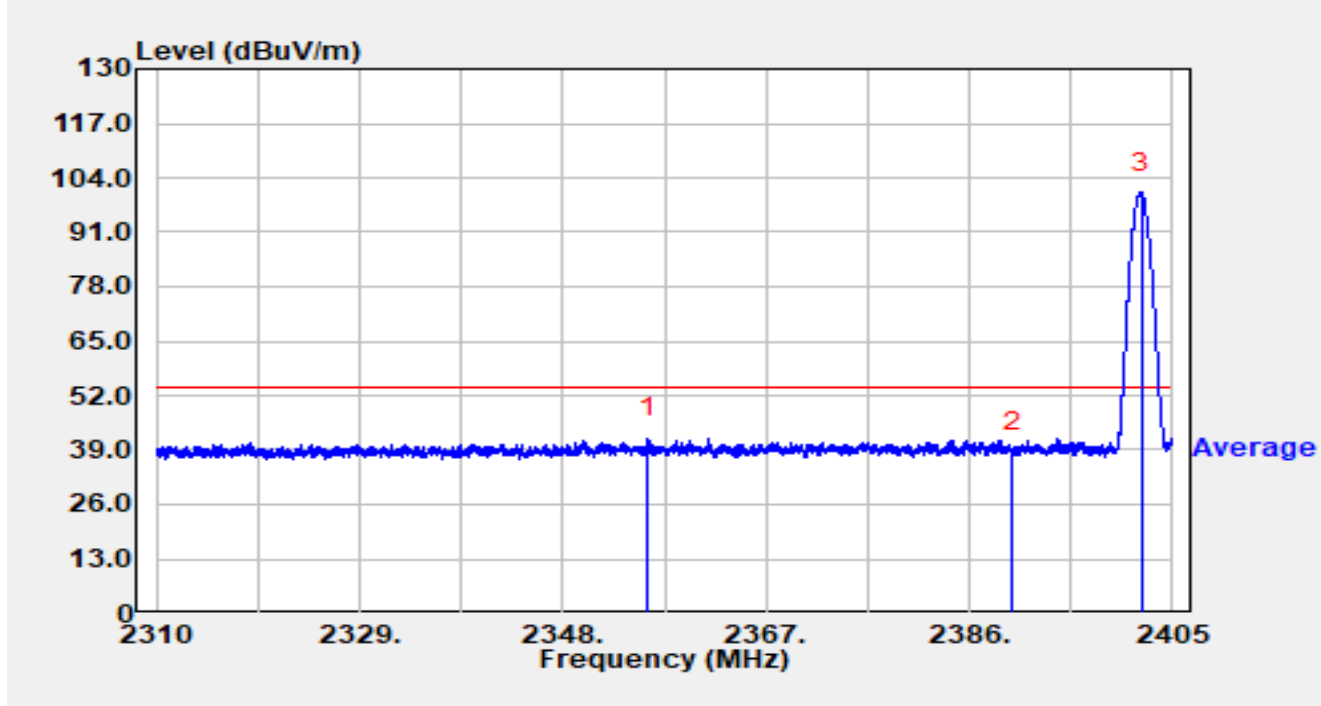


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2355.999	9.11	32.60	41.71	-12.29	54.00	Average
2		2390.000	5.78	32.69	38.47	-15.53	54.00	Average
3		2402.055	67.79	32.74	100.53	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-23
Temperature	16.3 °C	Humidity	45.2 %
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by BLE_1M at 2402MHz		

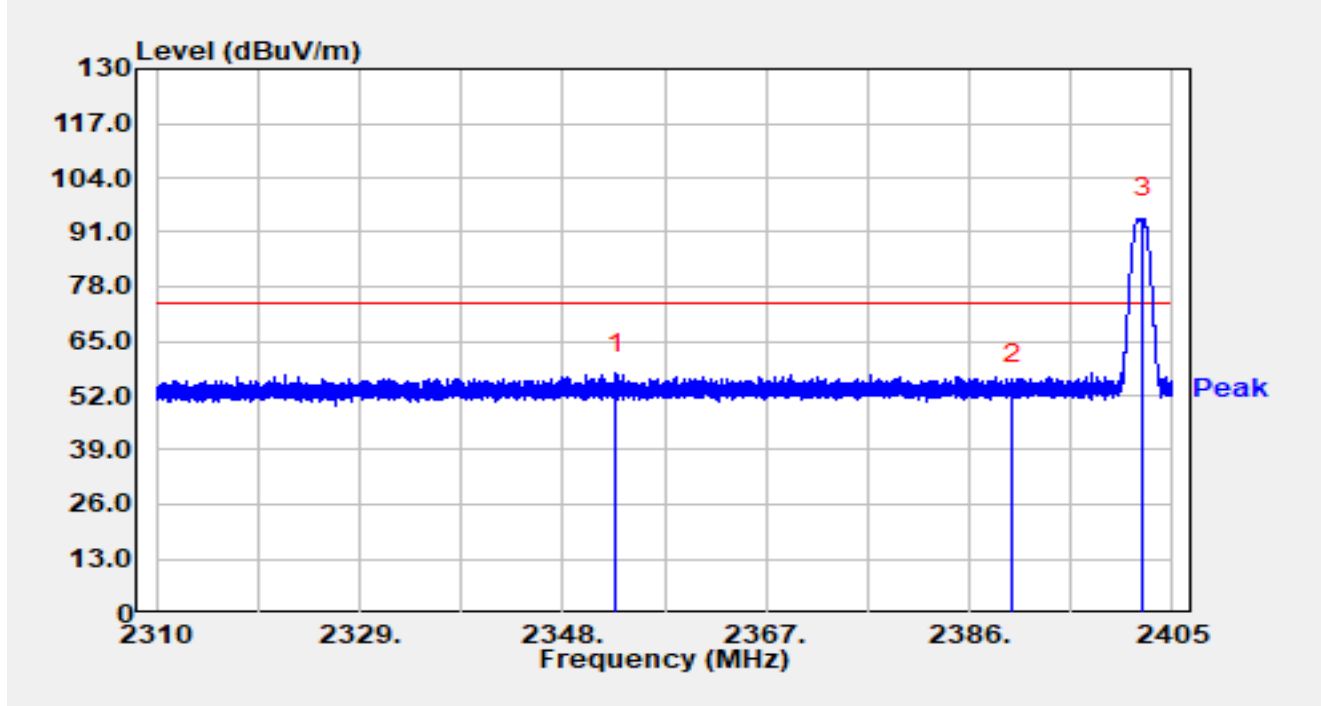


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2352.949	24.69	32.59	57.28	-16.72	74.00	Peak
2		2390.000	21.85	32.69	54.54	-19.46	74.00	Peak
3		2402.273	61.52	32.74	94.26	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-23
Temperature	16.3 °C	Humidity	45.2 %
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by BLE_1M at 2402MHz		

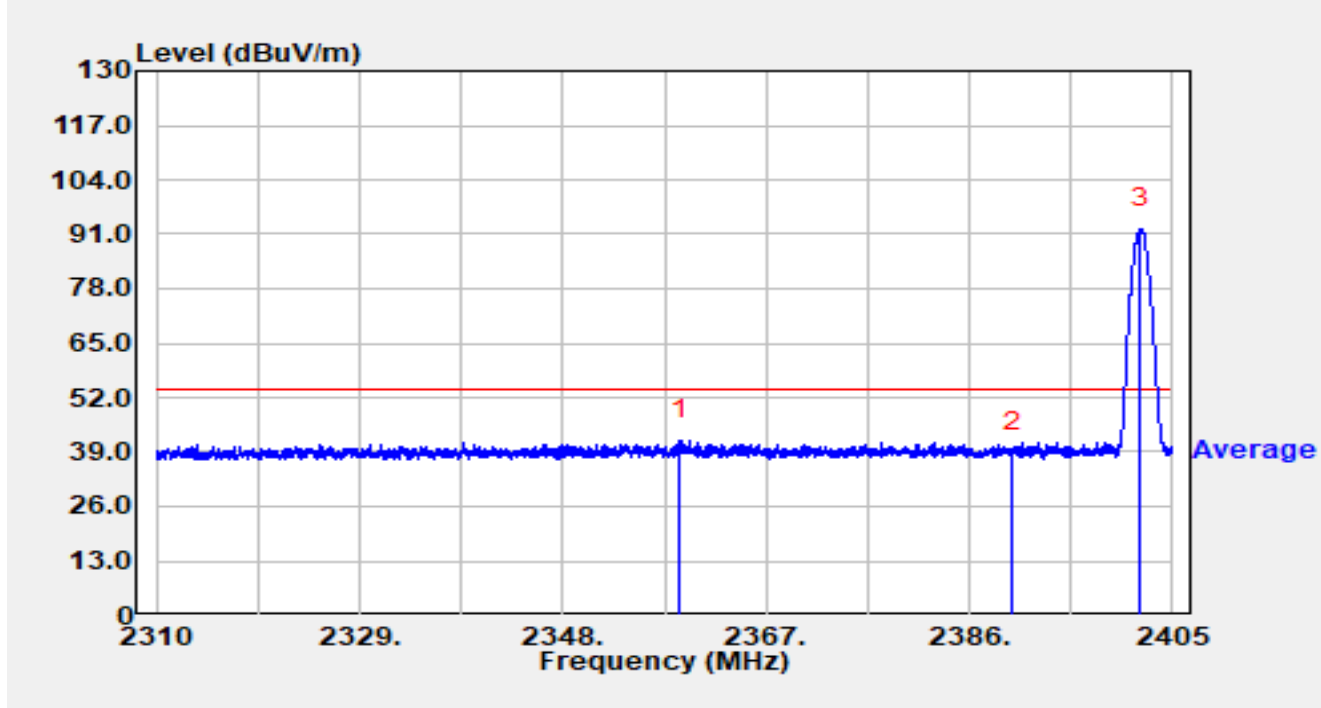


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2358.991	9.09	32.61	41.70	-12.30	54.00	Average
2		2390.000	6.47	32.69	39.16	-14.84	54.00	Average
3		2402.027	59.73	32.74	92.46	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-23
Temperature	16.3 °C	Humidity	45.2 %
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by BLE_1M at 2480MHz		

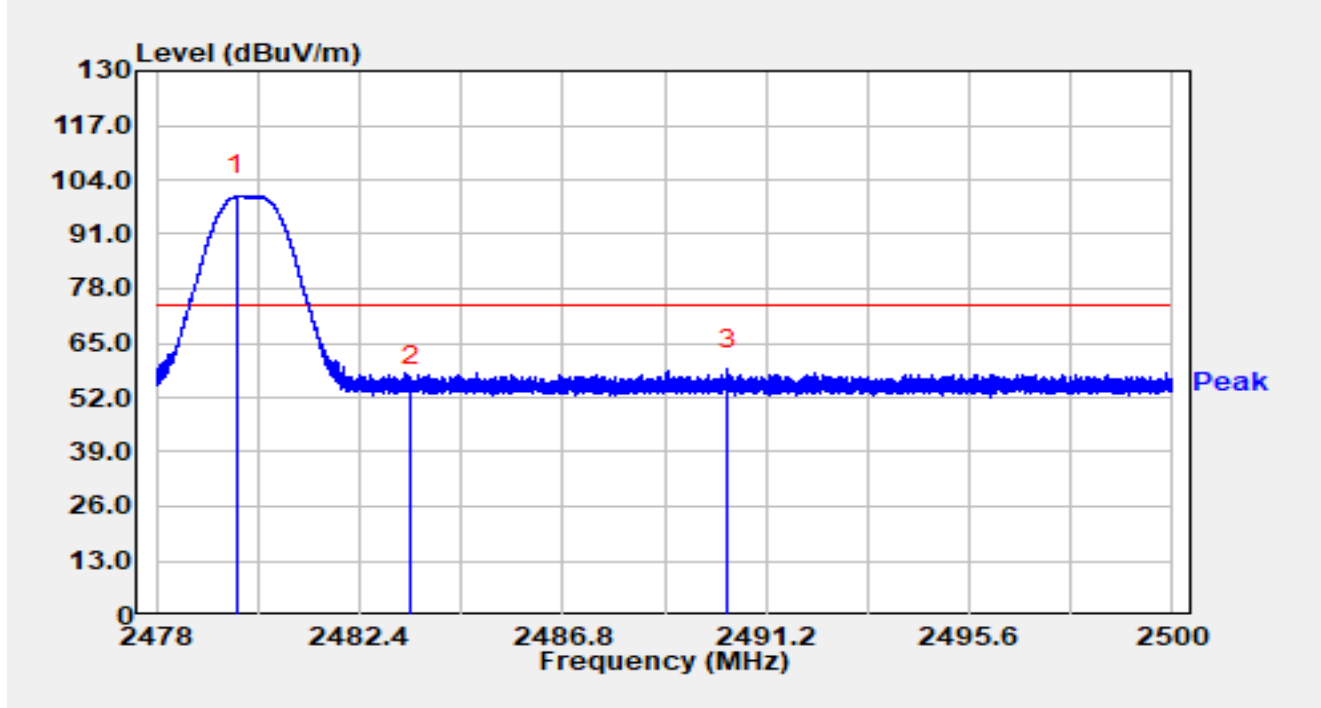


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2479.742	66.97	33.11	100.08	N/A	N/A	Peak
2		2483.500	21.58	33.13	54.72	-19.28	74.00	Peak
3	*	2490.382	25.49	33.16	58.65	-15.35	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-23
Temperature	16.3 °C	Humidity	45.2 %
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by BLE_1M at 2480MHz		

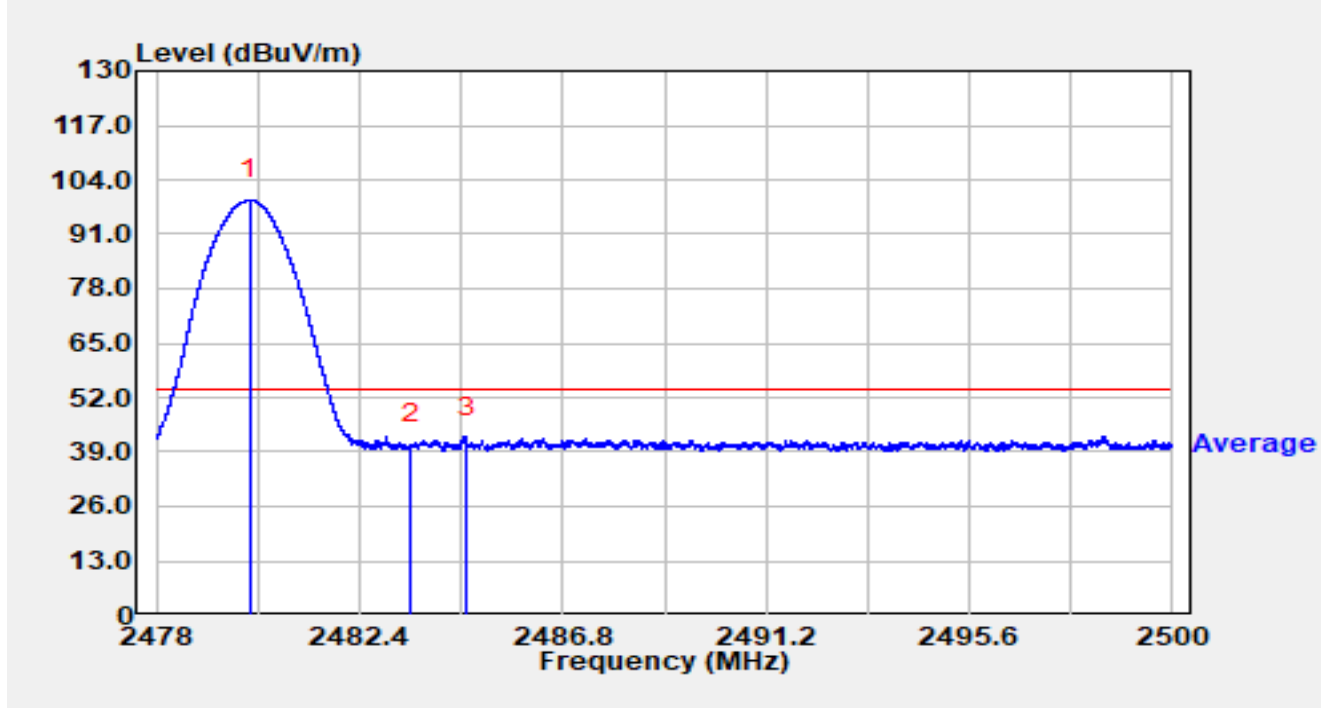


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2480.020	65.99	33.11	99.10	N/A	N/A	Average
2		2483.500	7.74	33.13	40.87	-13.13	54.00	Average
3	*	2484.710	9.46	33.14	42.60	-11.40	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-23
Temperature	16.3 °C	Humidity	45.2 %
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by BLE_1M at 2480MHz		

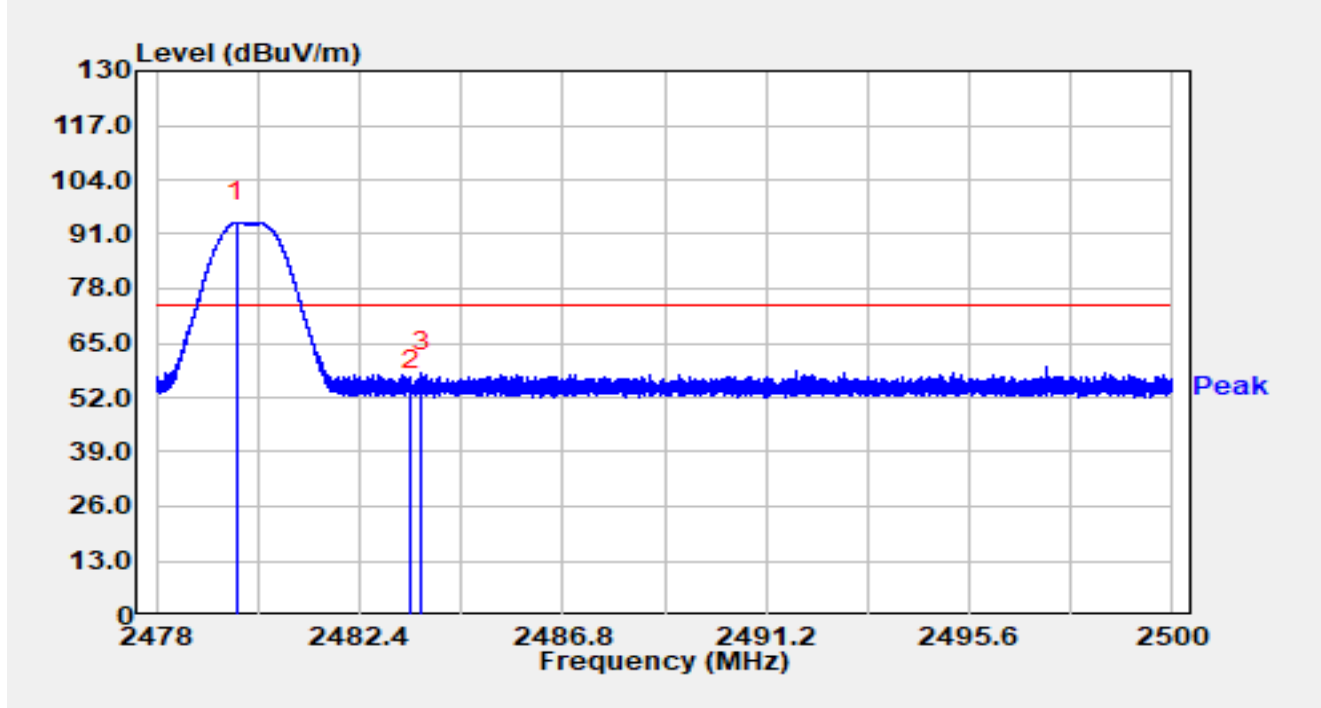


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2479.745	60.68	33.11	93.79	N/A	N/A	Peak
2		2483.500	20.53	33.13	53.66	-20.34	74.00	Peak
3	*	2483.735	24.97	33.13	58.11	-15.89	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-23
Temperature	16.3 °C	Humidity	45.2 %
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by BLE_1M at 2480MHz		

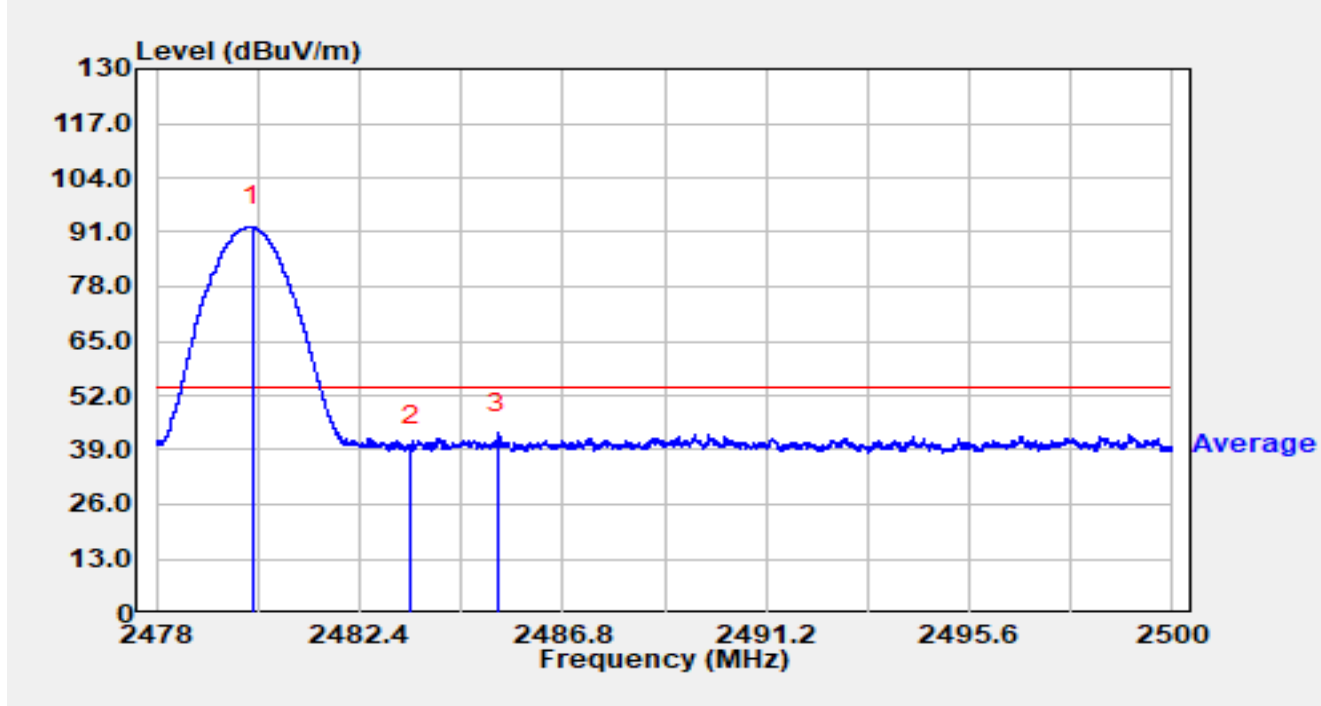


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2480.075	59.16	33.11	92.28	N/A	N/A	Average
2		2483.500	6.82	33.13	39.95	-14.05	54.00	Average
3	*	2485.390	9.89	33.14	43.03	-10.97	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-23
Temperature	16.3 °C	Humidity	45.2 %
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by BLE_2M at 2402MHz		

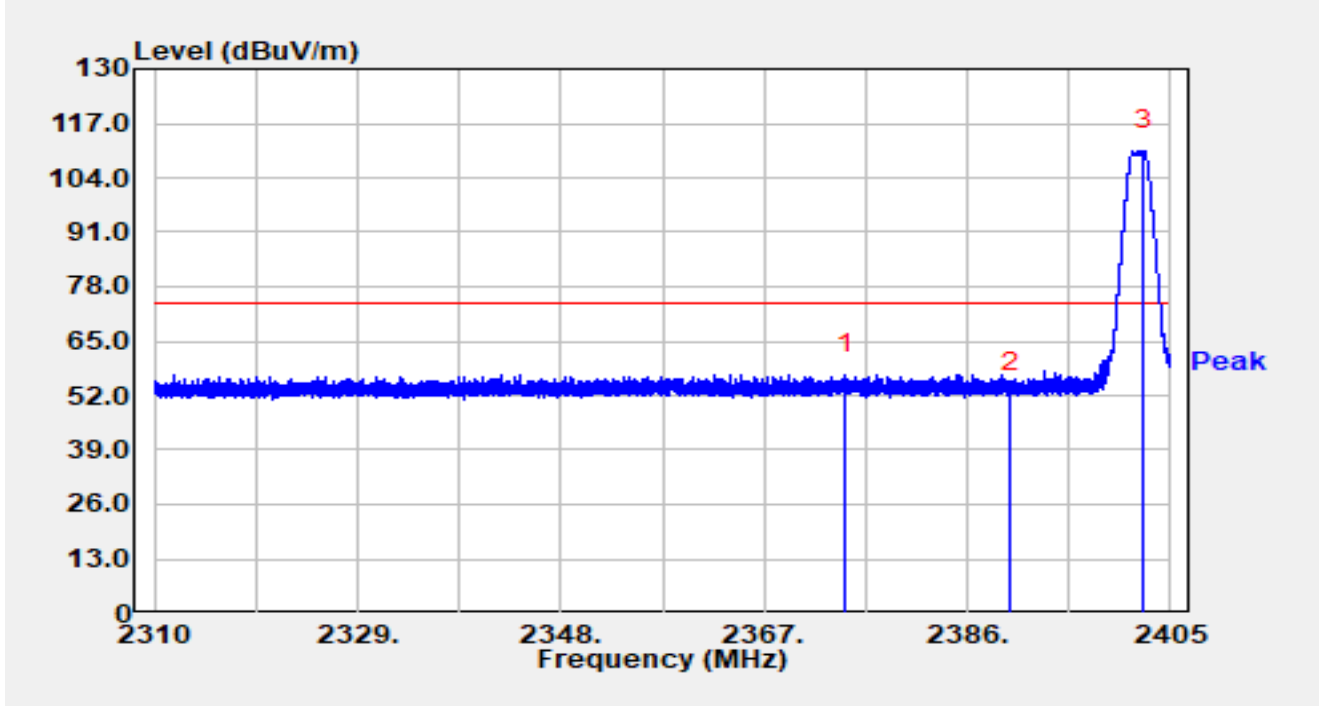


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2374.562	24.37	32.63	56.99	-17.01	74.00	Peak
2		2390.000	19.82	32.69	52.50	-21.50	74.00	Peak
3		2402.492	77.74	32.74	110.47	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-23
Temperature	16.3 °C	Humidity	45.2 %
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by BLE_2M at 2402MHz		

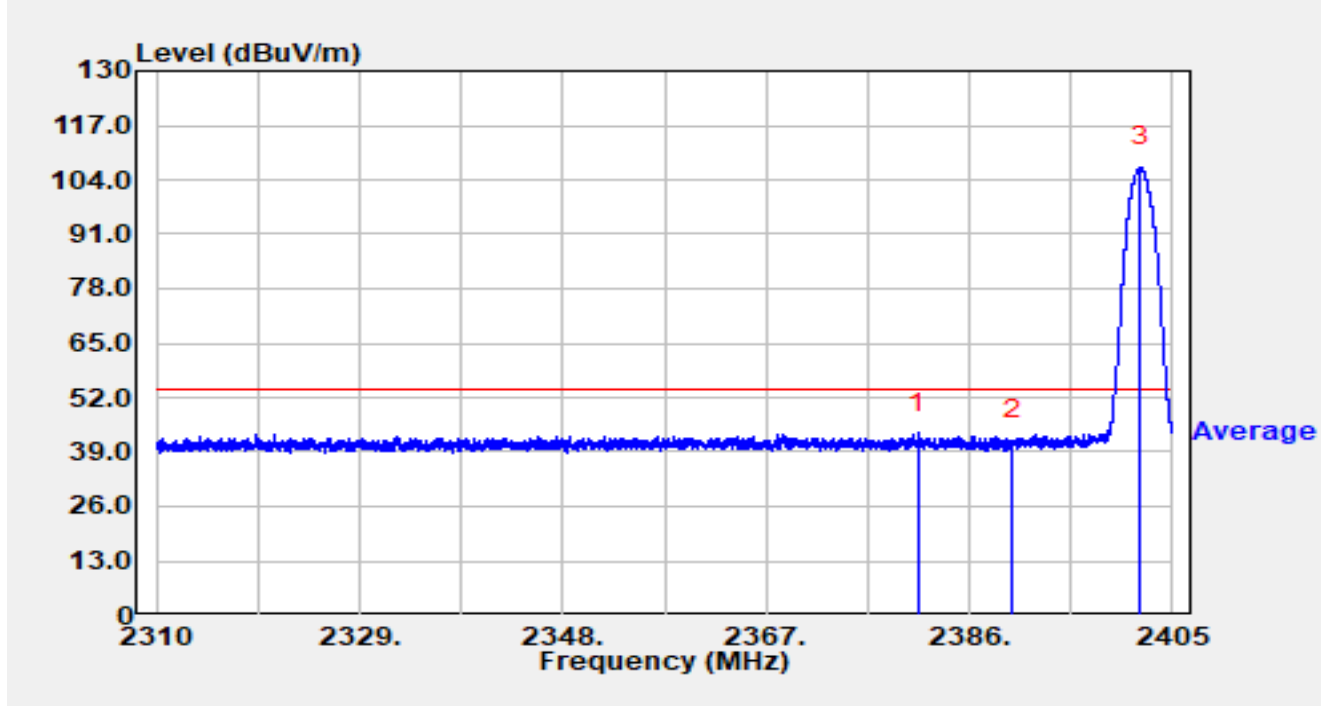


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2381.240	10.94	32.65	43.58	-10.42	54.00	Average
2		2390.000	9.09	32.69	41.78	-12.22	54.00	Average
3		2402.045	74.37	32.74	107.11	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-23
Temperature	16.3 °C	Humidity	45.2 %
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by BLE_2M at 2402MHz		

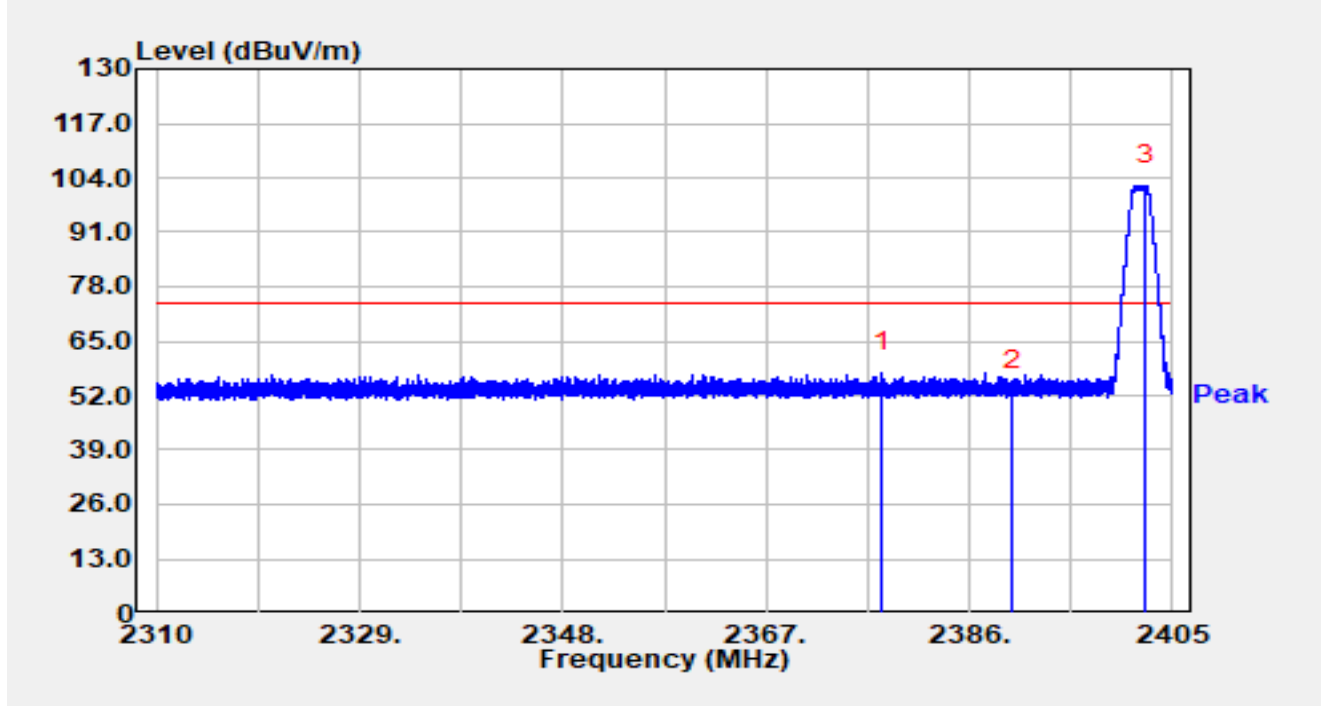


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2377.877	24.89	32.63	57.52	-16.48	74.00	Peak
2		2390.000	20.36	32.69	53.05	-20.95	74.00	Peak
3		2402.511	69.48	32.74	102.21	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-23
Temperature	16.3 °C	Humidity	45.2 %
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by BLE_2M at 2402MHz		

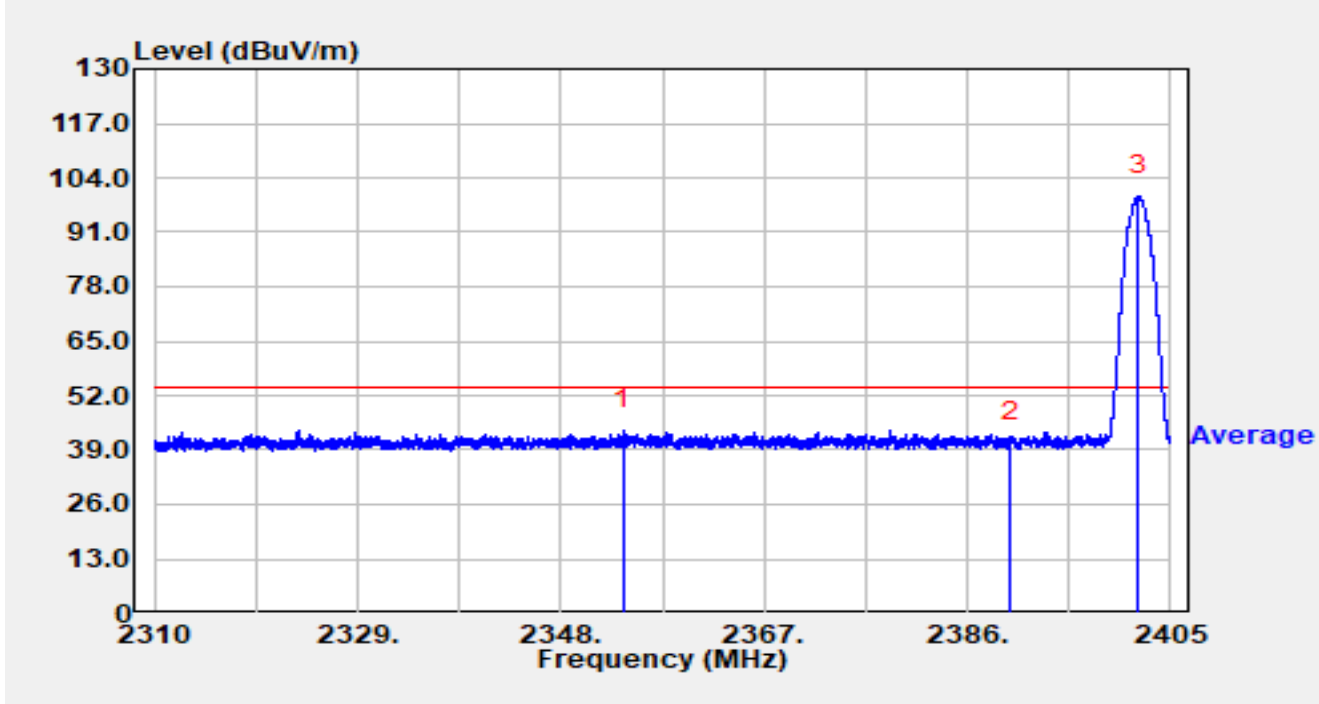


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2353.814	11.16	32.59	43.75	-10.25	54.00	Average
2		2390.000	8.44	32.69	41.13	-12.87	54.00	Average
3		2402.008	67.03	32.74	99.77	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-23
Temperature	16.3 °C	Humidity	45.2 %
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by BLE_2M at 2480MHz		

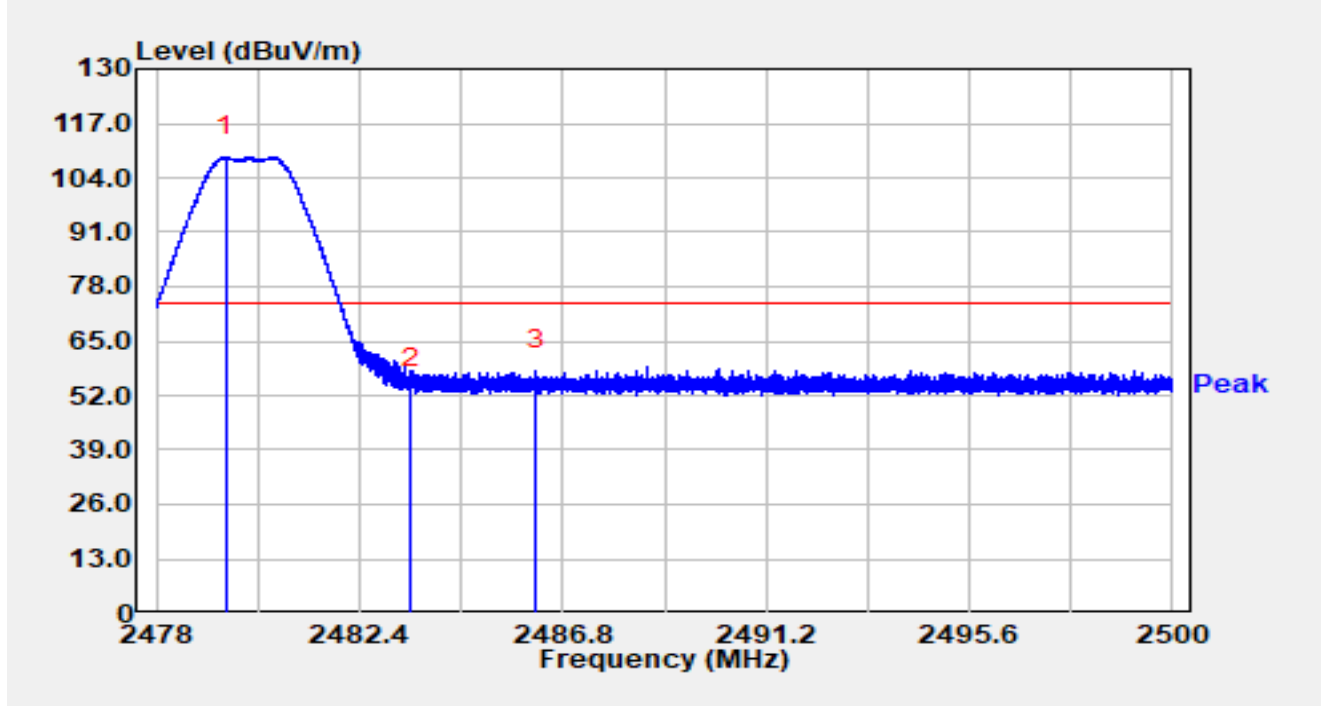


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2479.514	75.82	33.11	108.93	N/A	N/A	Peak
2		2483.500	20.74	33.13	53.87	-20.13	74.00	Peak
3	*	2486.232	24.86	33.14	58.00	-16.00	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-23
Temperature	16.3 °C	Humidity	45.2 %
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by BLE_2M at 2480MHz		

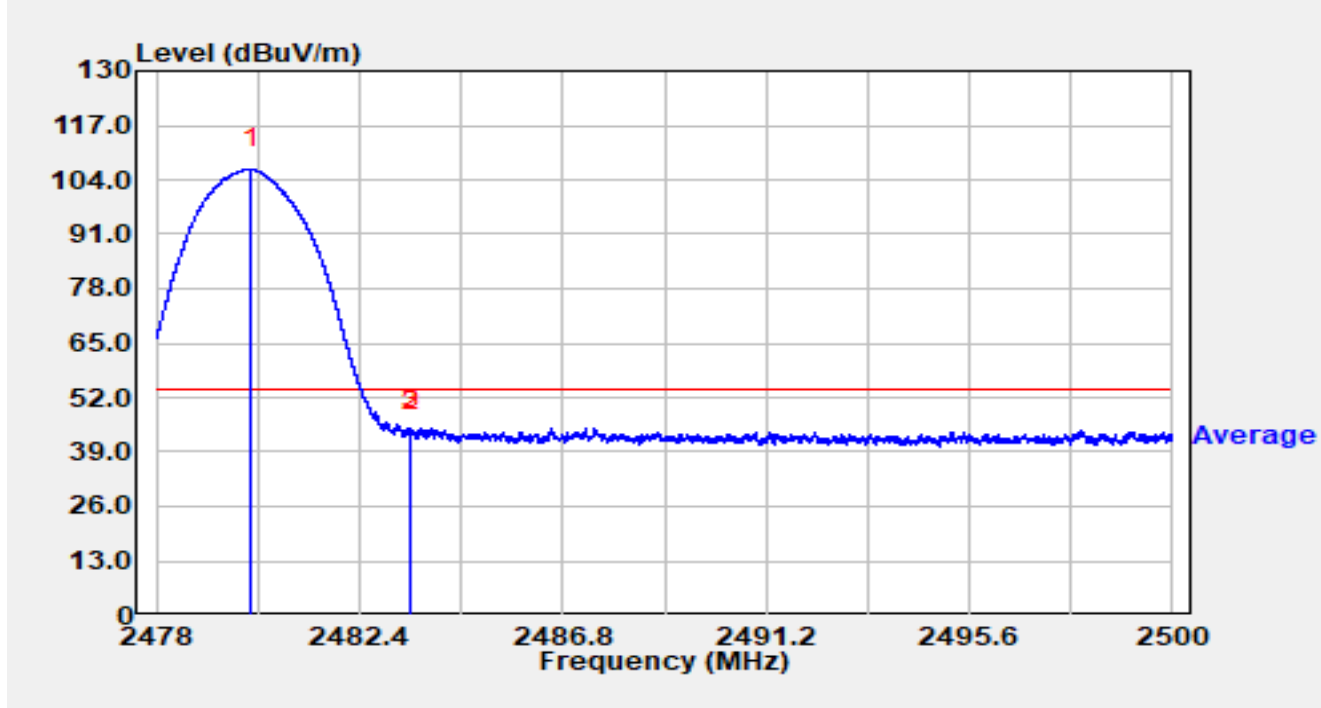


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2480.052	73.36	33.11	106.47	N/A	N/A	Average
2		2483.500	11.02	33.13	44.15	-9.85	54.00	Average
3	*	2483.509	11.45	33.13	44.58	-9.42	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-23
Temperature	16.3 °C	Humidity	45.2 %
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by BLE_2M at 2480MHz		

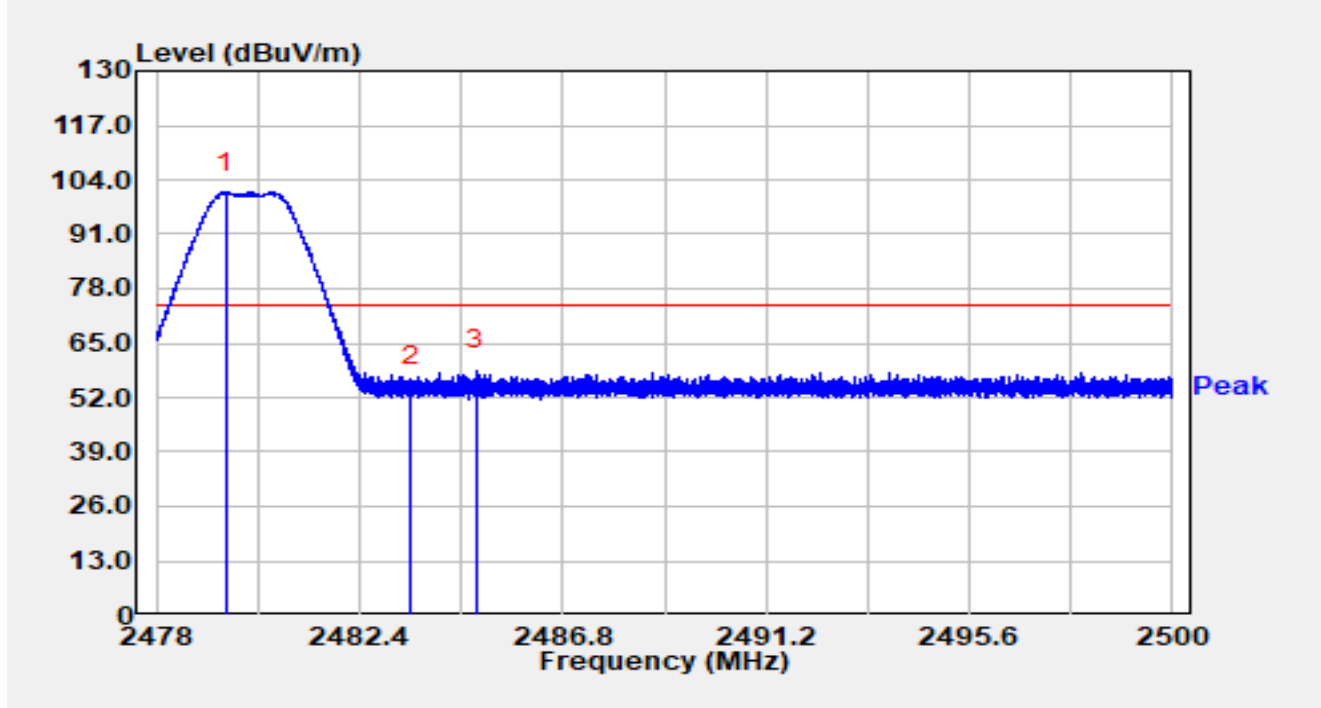


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2479.500	67.90	33.11	101.01	N/A	N/A	Peak
2		2483.500	21.55	33.13	54.68	-19.32	74.00	Peak
3	*	2484.923	25.47	33.14	58.60	-15.40	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-23
Temperature	16.3 °C	Humidity	45.2 %
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by BLE_2M at 2480MHz		

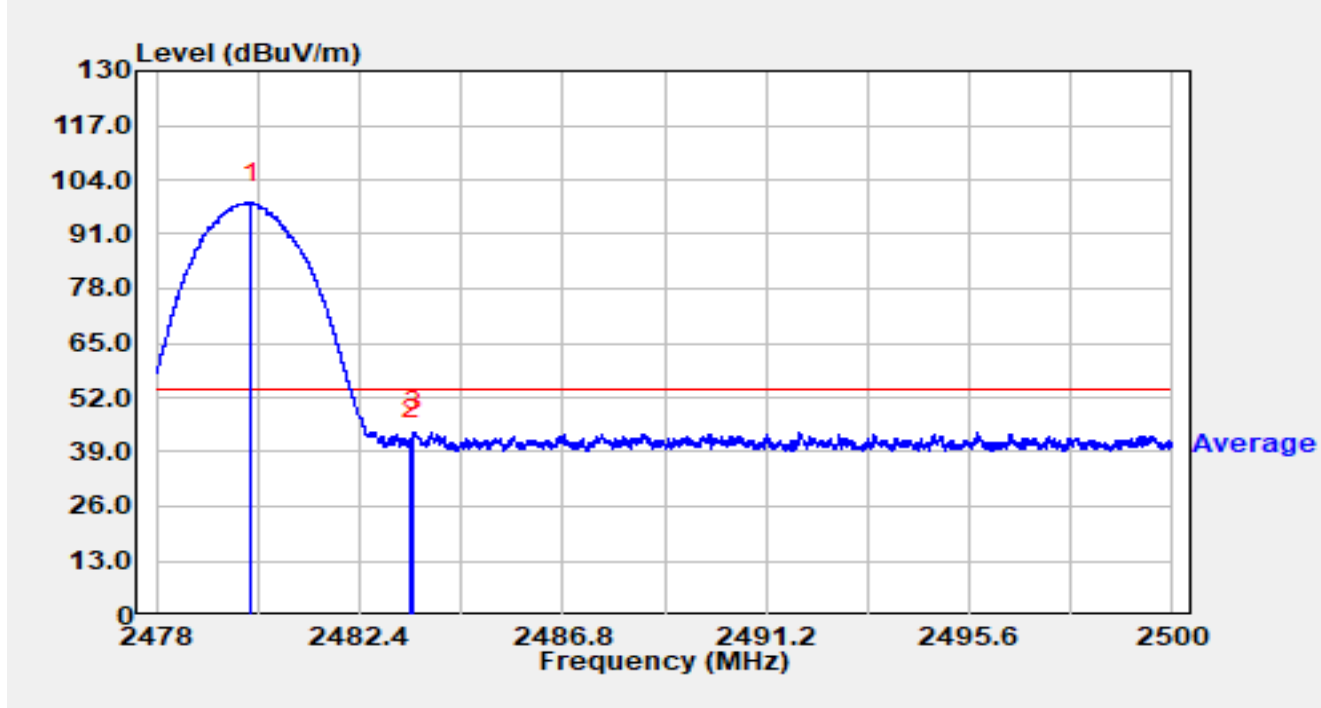


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2480.044	65.40	33.11	98.52	N/A	N/A	Average
2		2483.500	8.71	33.13	41.84	-12.16	54.00	Average
3	*	2483.559	10.62	33.13	43.76	-10.24	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-23
Temperature	16.3 °C	Humidity	45.2 %
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by BLE_S8 at 2402MHz		

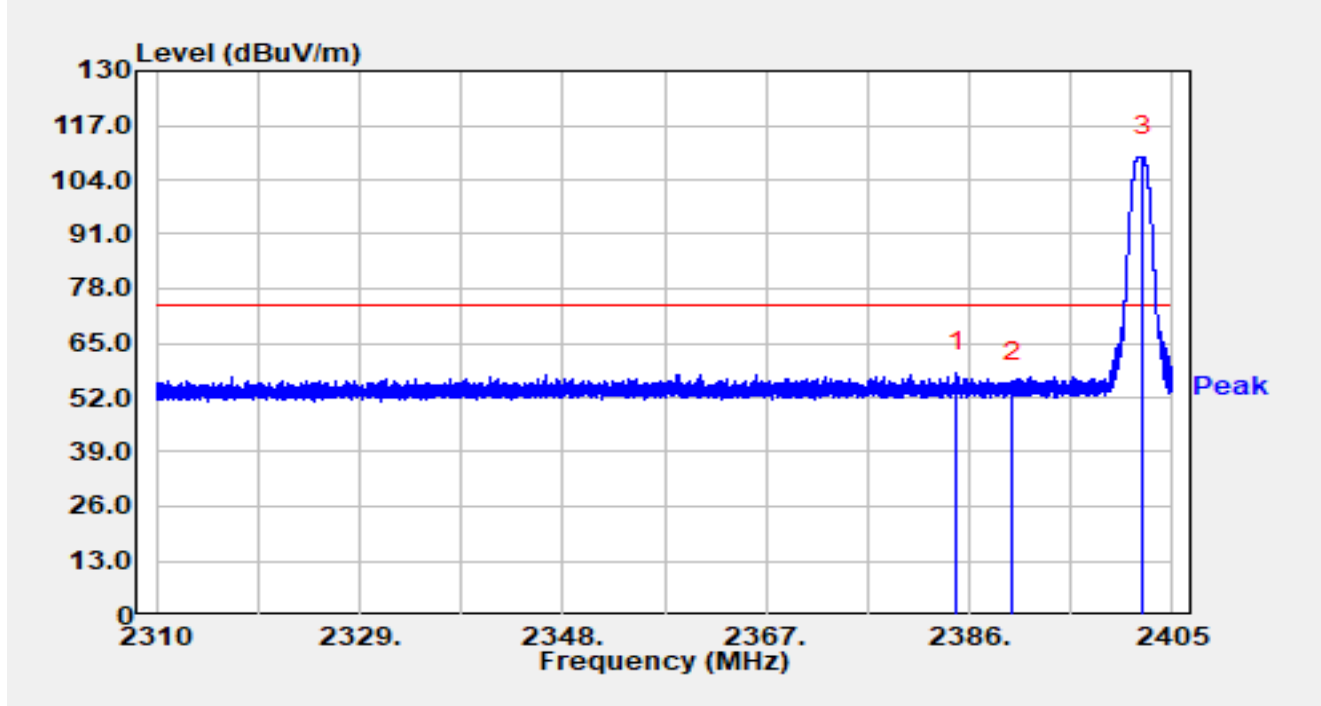


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2384.869	25.41	32.66	58.07	-15.93	74.00	Peak
2		2390.000	22.78	32.69	55.47	-18.53	74.00	Peak
3		2402.254	76.85	32.74	109.58	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-23
Temperature	16.3 °C	Humidity	45.2 %
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by BLE_S8 at 2402MHz		

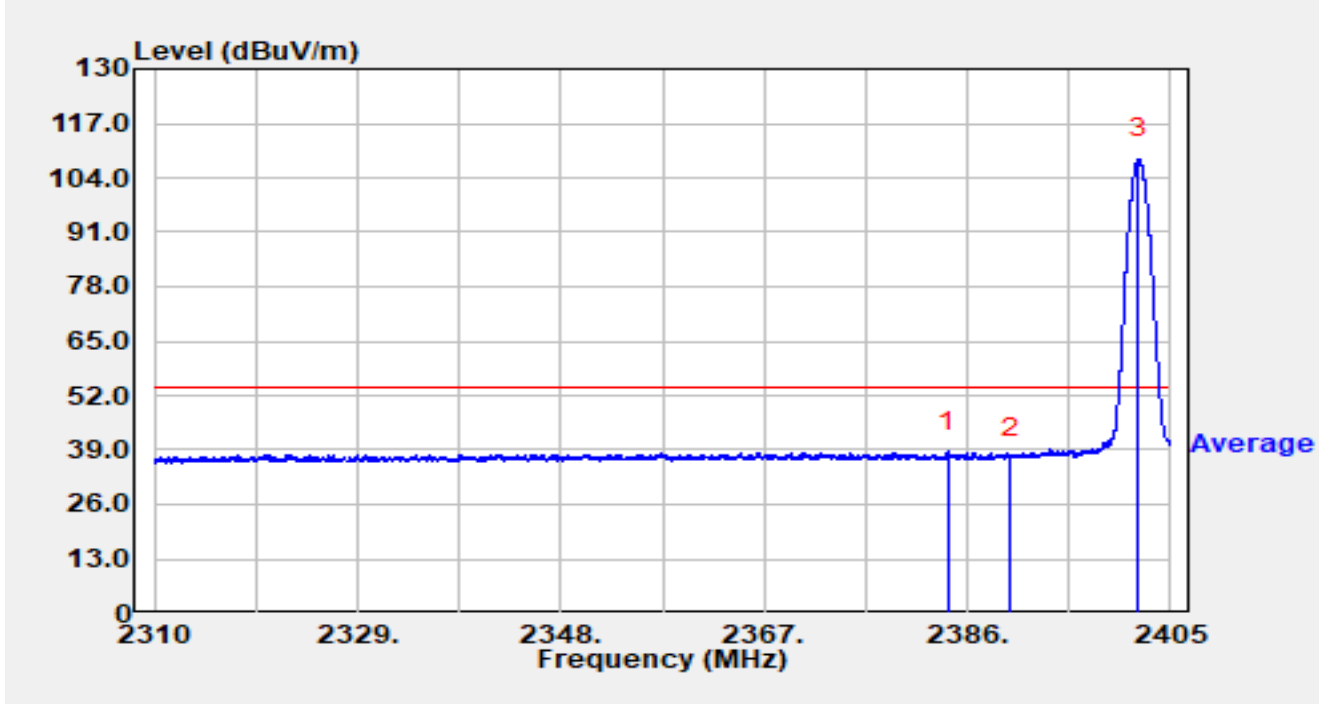


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2384.176	5.89	32.66	38.55	-15.45	54.00	Average
2		2390.000	4.51	32.69	37.20	-16.80	54.00	Average
3		2402.036	75.71	32.74	108.45	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-23
Temperature	16.3 °C	Humidity	45.2 %
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by BLE_S8 at 2402MHz		

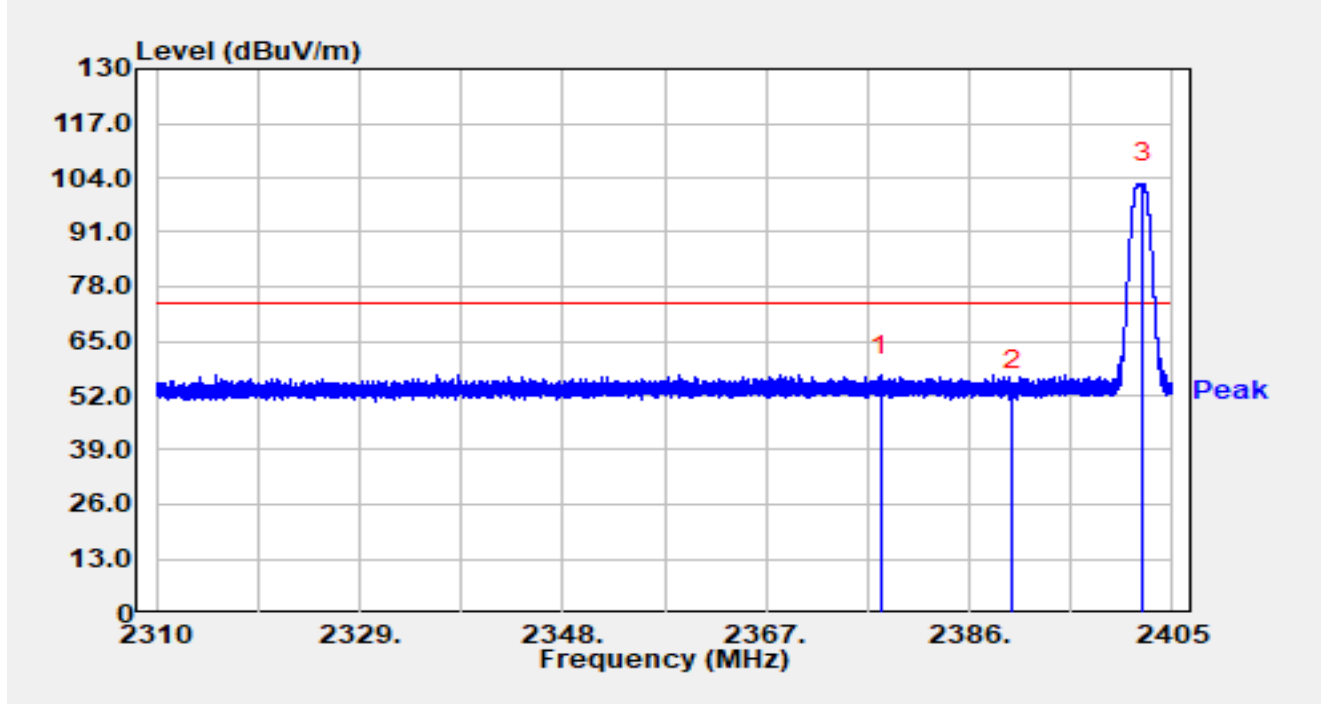


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2377.668	24.12	32.63	56.76	-17.24	74.00	Peak
2		2390.000	20.34	32.69	53.03	-20.97	74.00	Peak
3		2402.245	69.93	32.74	102.67	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-23
Temperature	16.3 °C	Humidity	45.2 %
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by BLE_S8 at 2402MHz		

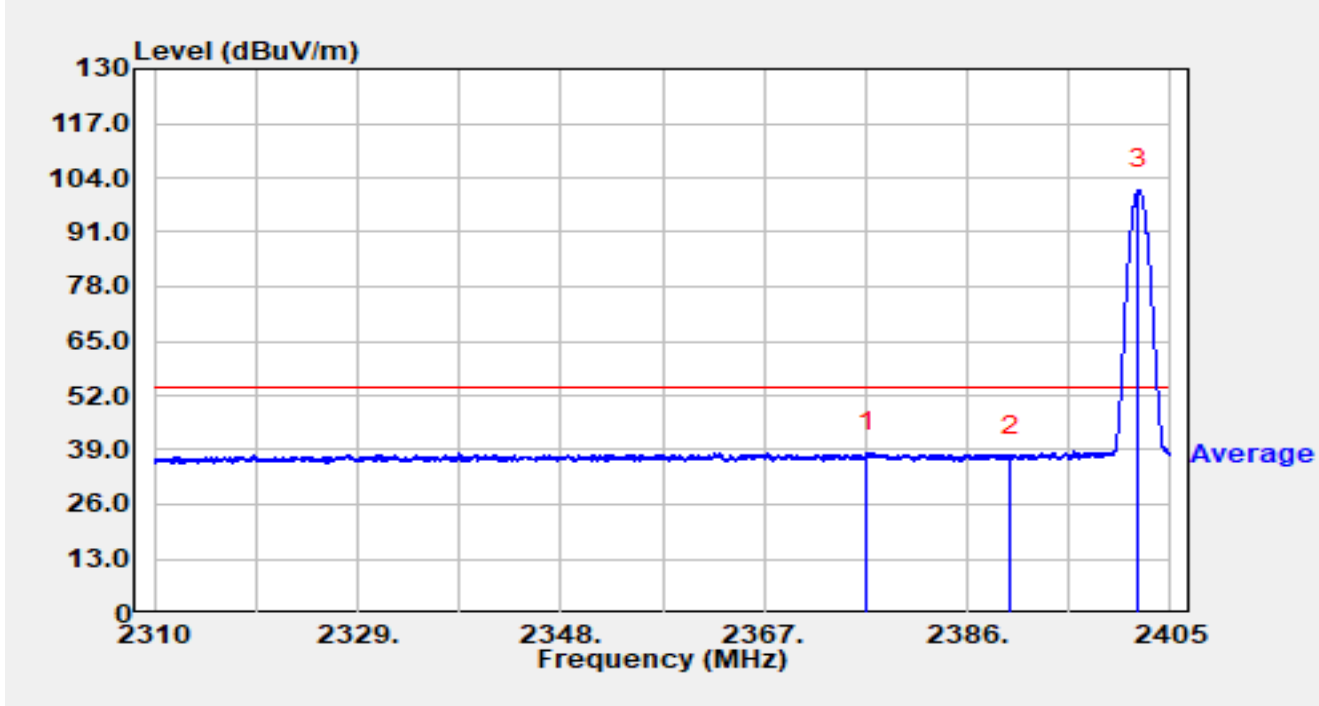


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1	*	2376.576	5.82	32.63	38.46	-15.54	54.00	Average
2		2390.000	4.96	32.69	37.65	-16.35	54.00	Average
3		2402.027	68.51	32.74	101.25	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-23
Temperature	16.3 °C	Humidity	45.2 %
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by BLE_S8 at 2480MHz		

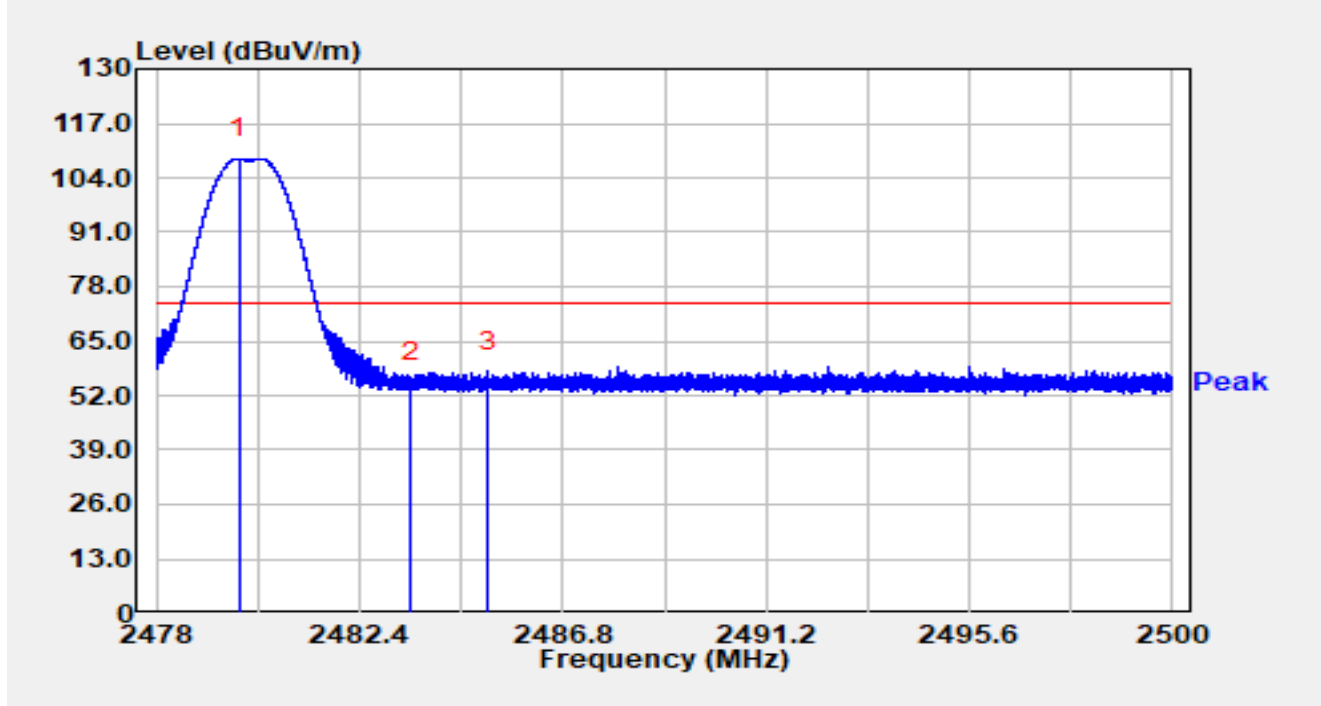


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2479.780	75.40	33.11	108.51	N/A	N/A	Peak
2		2483.500	21.91	33.13	55.04	-18.96	74.00	Peak
3	*	2485.190	24.65	33.14	57.79	-16.21	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-23
Temperature	16.3 °C	Humidity	45.2 %
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by BLE_S8 at 2480MHz		

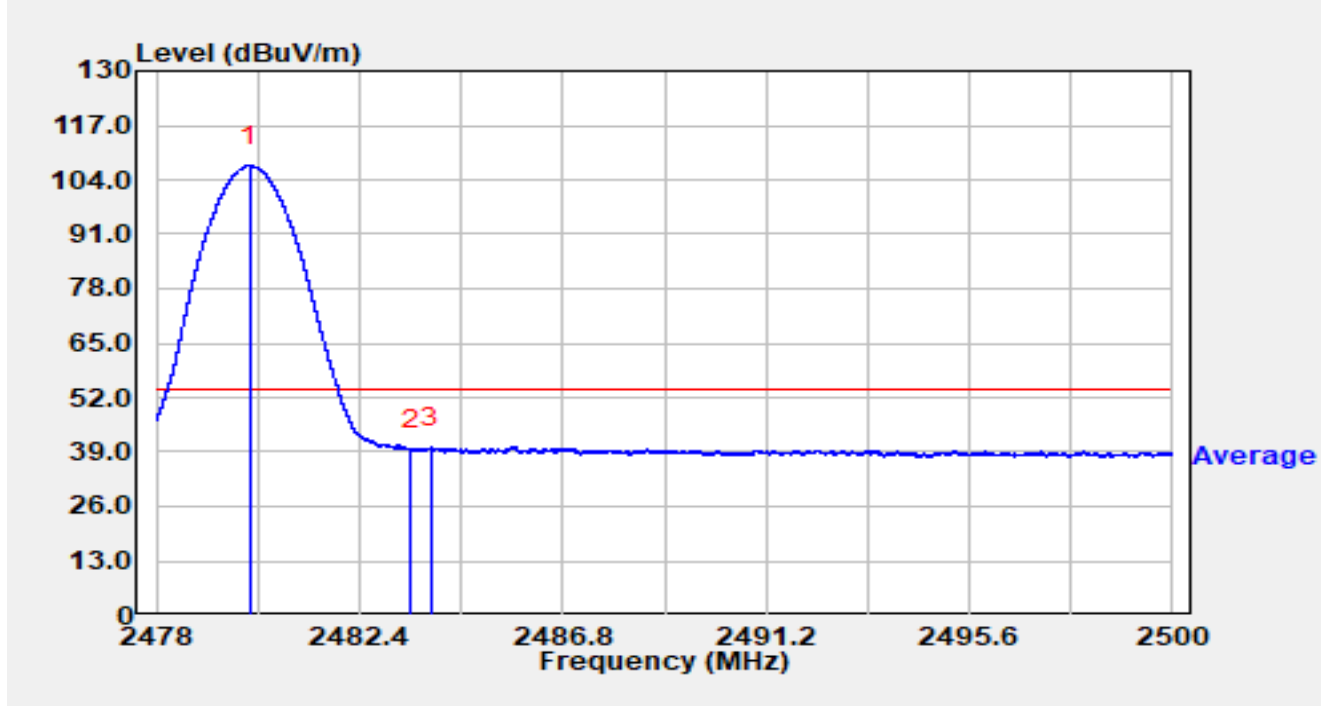


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2480.013	74.27	33.11	107.39	N/A	N/A	Average
2		2483.500	6.57	33.13	39.70	-14.30	54.00	Average
3	*	2483.940	6.86	33.13	39.99	-14.01	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-23
Temperature	16.3 °C	Humidity	45.2 %
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by BLE_S8 at 2480MHz		

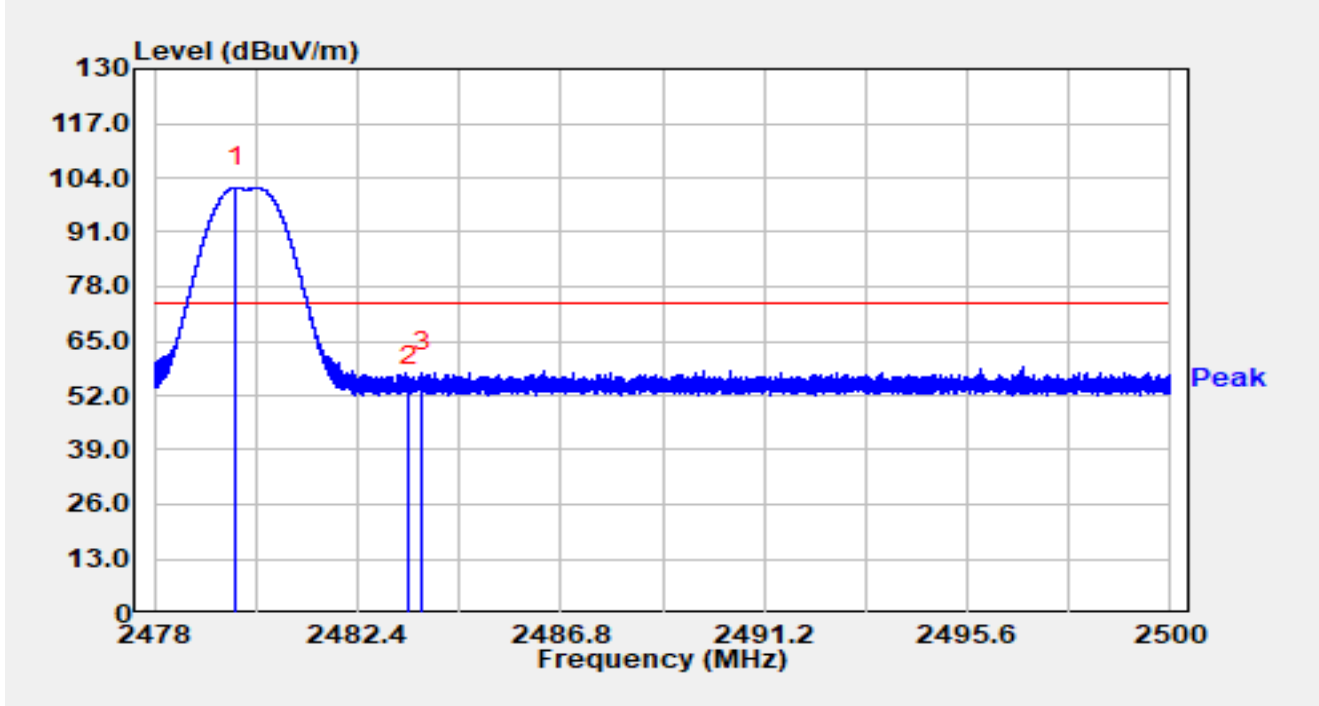


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2479.769	68.54	33.11	101.65	N/A	N/A	Peak
2		2483.500	21.07	33.13	54.20	-19.80	74.00	Peak
3	*	2483.802	24.43	33.13	57.56	-16.44	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-23
Temperature	16.3 °C	Humidity	45.2 %
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by BLE_S8 at 2480MHz		

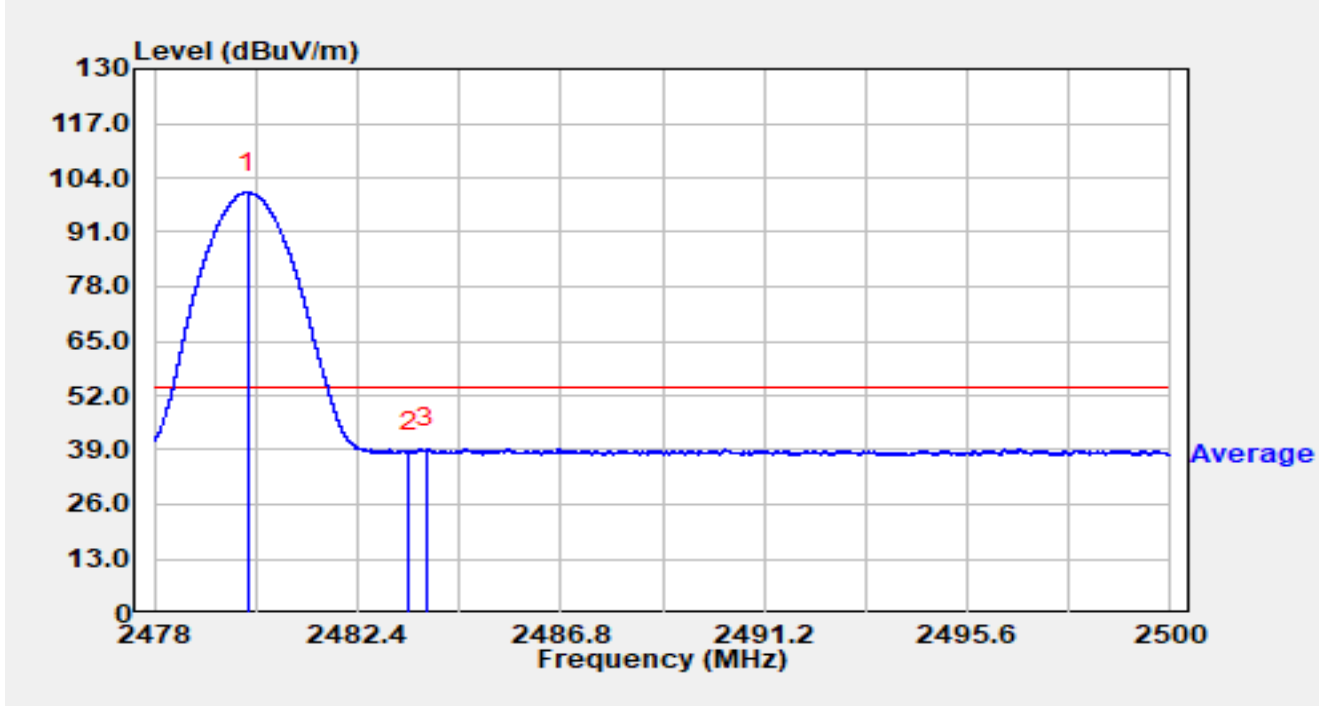


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2480.026	67.38	33.11	100.50	N/A	N/A	Average
2		2483.500	5.19	33.13	38.32	-15.68	54.00	Average
3	*	2483.894	6.28	33.13	39.41	-14.59	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-23
Temperature	16.3 °C	Humidity	45.2 %
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by BLE_S2 at 2402MHz		

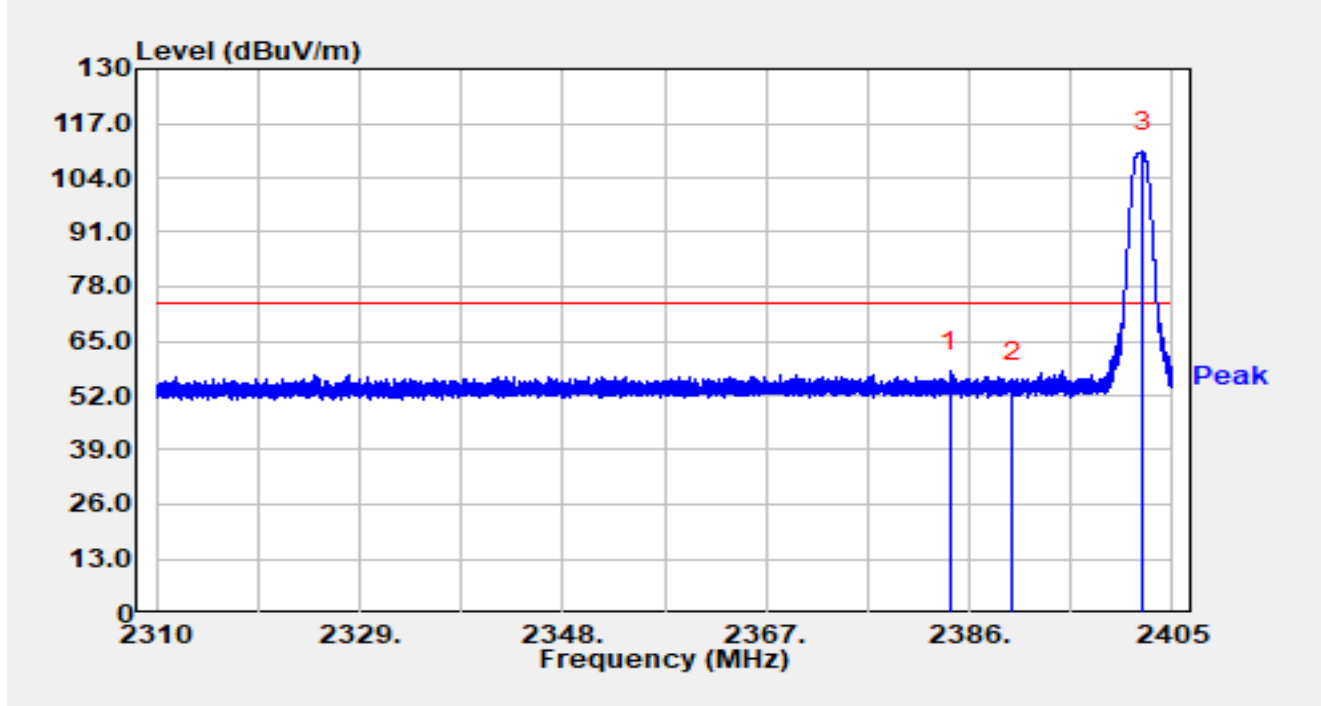


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2384.205	25.04	32.66	57.70	-16.30	74.00	Peak
2		2390.000	22.34	32.69	55.03	-18.97	74.00	Peak
3		2402.264	77.43	32.74	110.17	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-23
Temperature	16.3 °C	Humidity	45.2 %
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by BLE_S2 at 2402MHz		

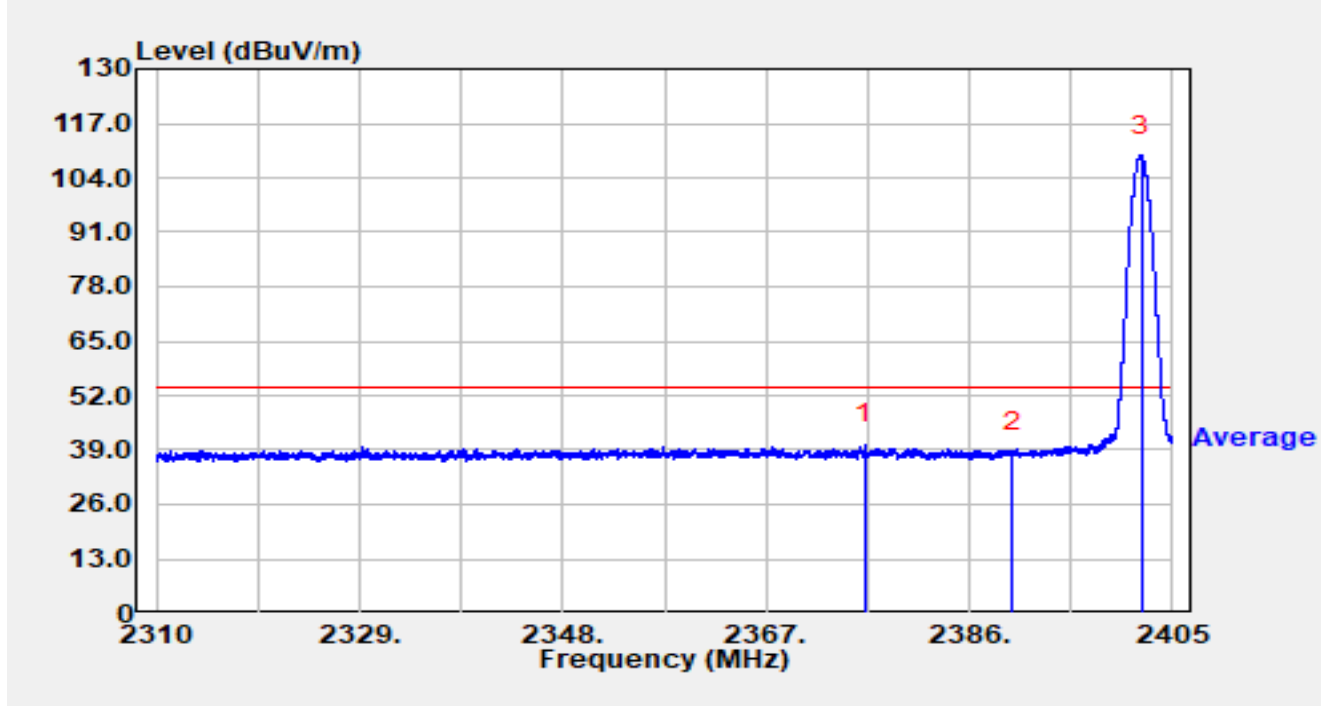


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2376.225	7.65	32.63	40.28	-13.72	54.00	Average
2		2390.000	5.89	32.69	38.58	-15.42	54.00	Average
3		2402.083	76.65	32.74	109.38	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-23
Temperature	16.3 °C	Humidity	45.2 %
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by BLE_S2 at 2402MHz		

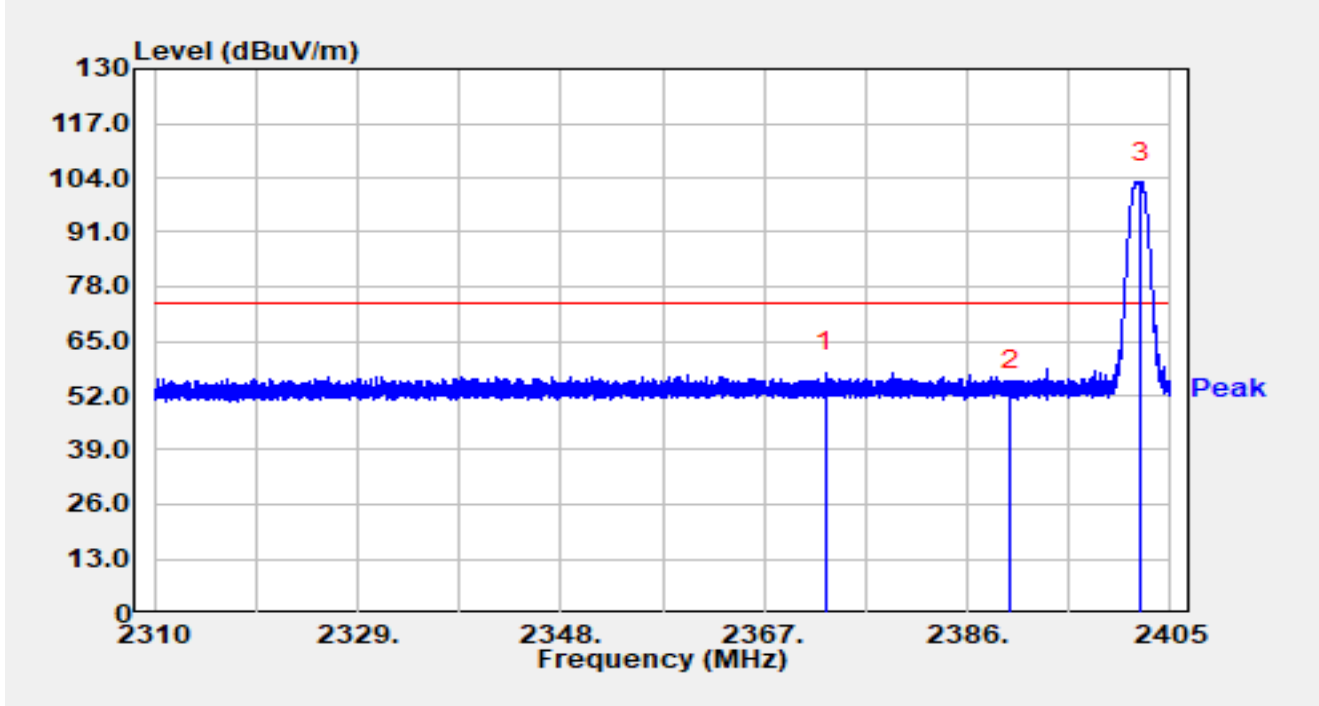


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2372.709	24.78	32.63	57.41	-16.59	74.00	Peak
2		2390.000	20.58	32.69	53.26	-20.74	74.00	Peak
3		2402.236	70.23	32.74	102.96	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-23
Temperature	16.3 °C	Humidity	45.2 %
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by BLE_S2 at 2402MHz		

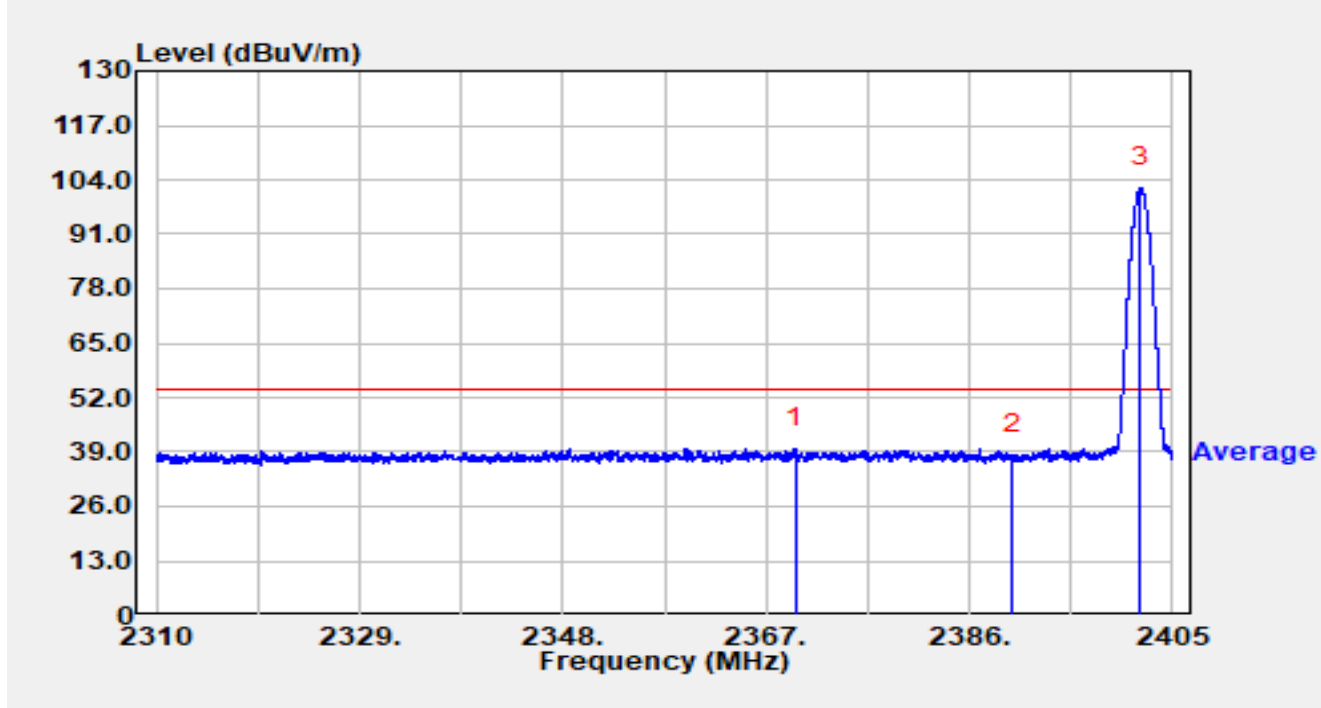


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2369.727	7.21	32.62	39.84	-14.16	54.00	Average
2		2390.000	5.70	32.69	38.39	-15.61	54.00	Average
3		2401.989	69.30	32.74	102.04	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-23
Temperature	16.3 °C	Humidity	45.2 %
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by BLE_S2 at 2480MHz		

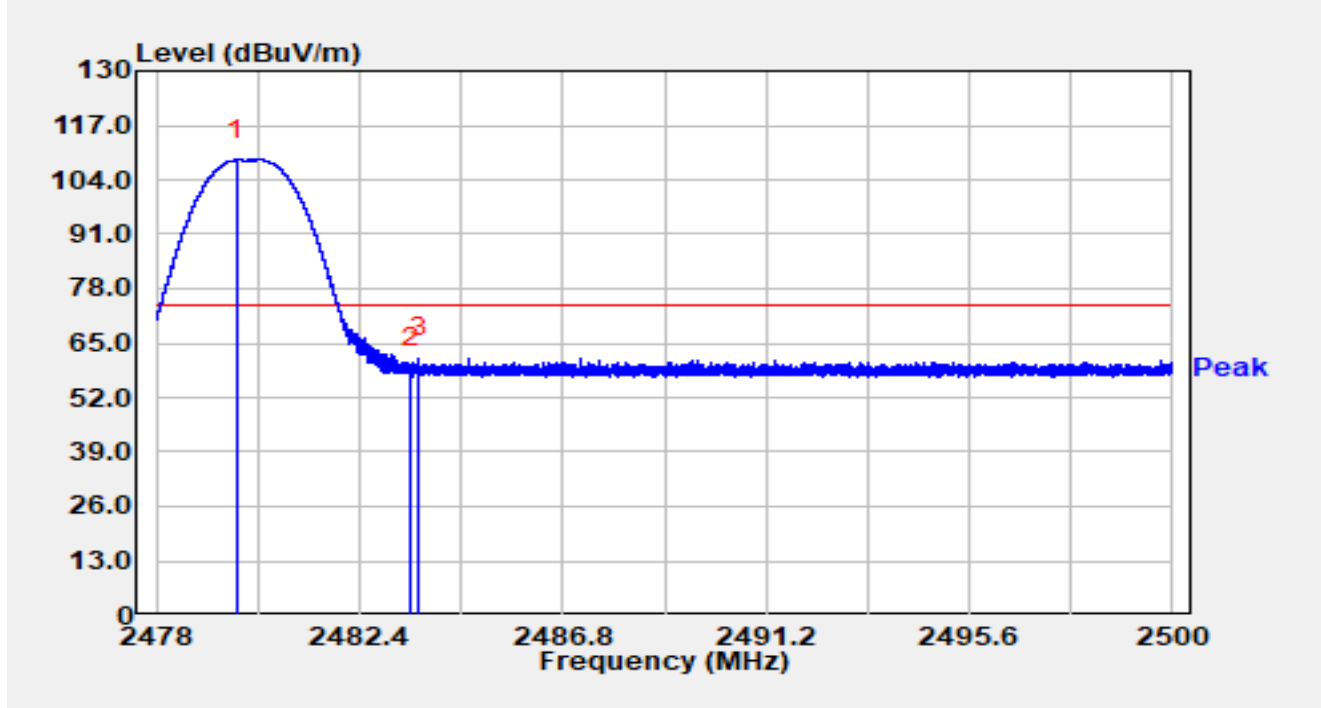


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2479.749	75.62	33.11	108.73	N/A	N/A	Peak
2		2483.500	25.97	33.13	59.10	-14.90	74.00	Peak
3	*	2483.672	28.33	33.13	61.46	-12.54	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-23
Temperature	16.3 °C	Humidity	45.2 %
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	HF907_102861	Polarity	Horizontal
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by BLE_S2 at 2480MHz		

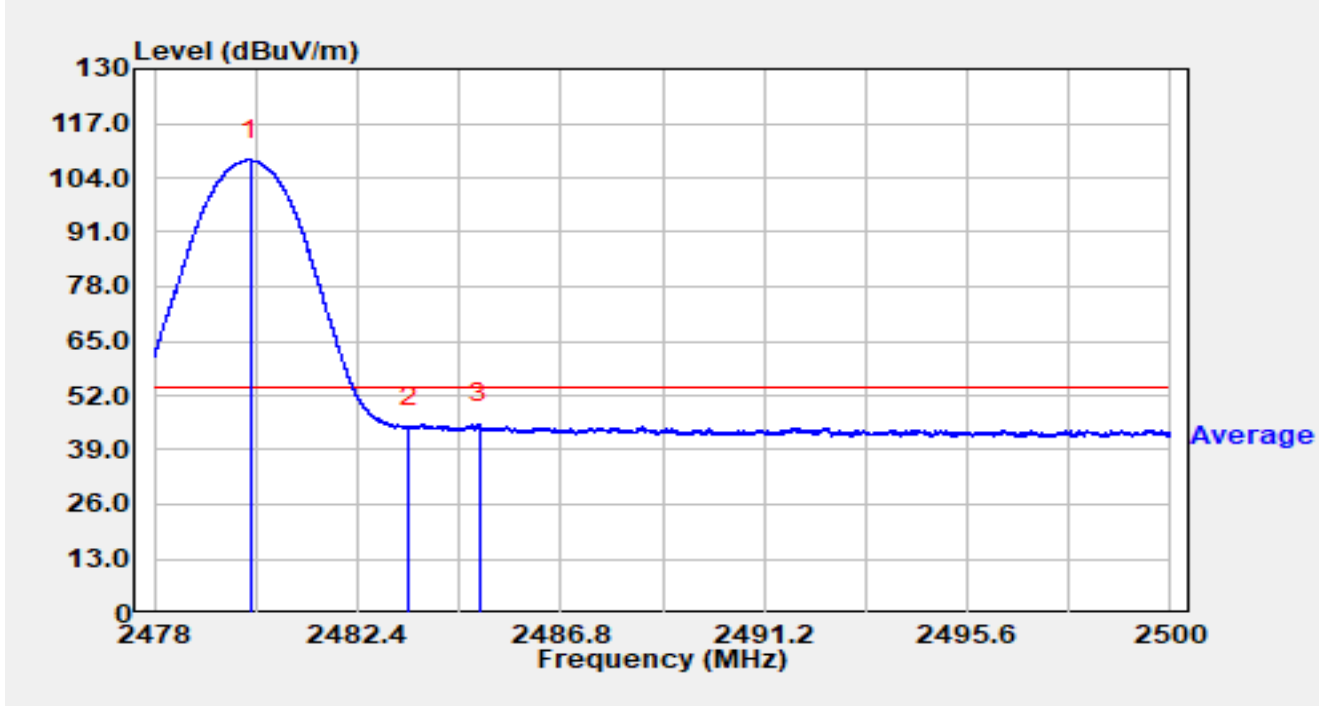


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2480.068	75.12	33.11	108.23	N/A	N/A	Average
2		2483.500	11.27	33.13	44.40	-9.60	54.00	Average
3	*	2485.025	12.03	33.14	45.17	-8.83	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-23
Temperature	16.3 °C	Humidity	45.2 %
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by BLE_S2 at 2480MHz		

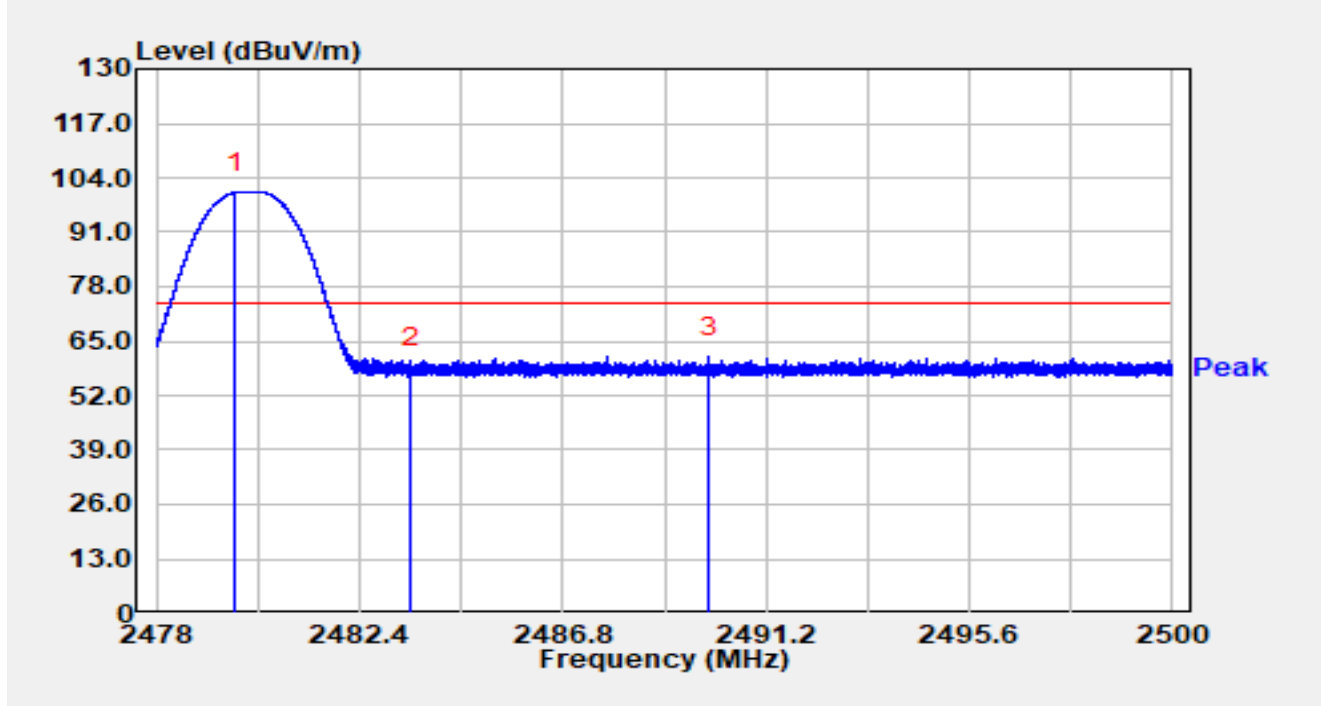


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2479.720	67.41	33.11	100.52	N/A	N/A	Peak
2		2483.500	25.55	33.13	58.68	-15.32	74.00	Peak
3	*	2489.968	28.06	33.16	61.22	-12.78	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-01-23
Temperature	16.3 °C	Humidity	45.2 %
Limit	FCC_Part15_Band Edge(3m)	Test Engineer	Fusco Pan
Factor	HF907_102861	Polarity	Vertical
EUT	Mobile Computer	Test Voltage	By Battery
Test Mode	Transmit by BLE_S2 at 2480MHz		

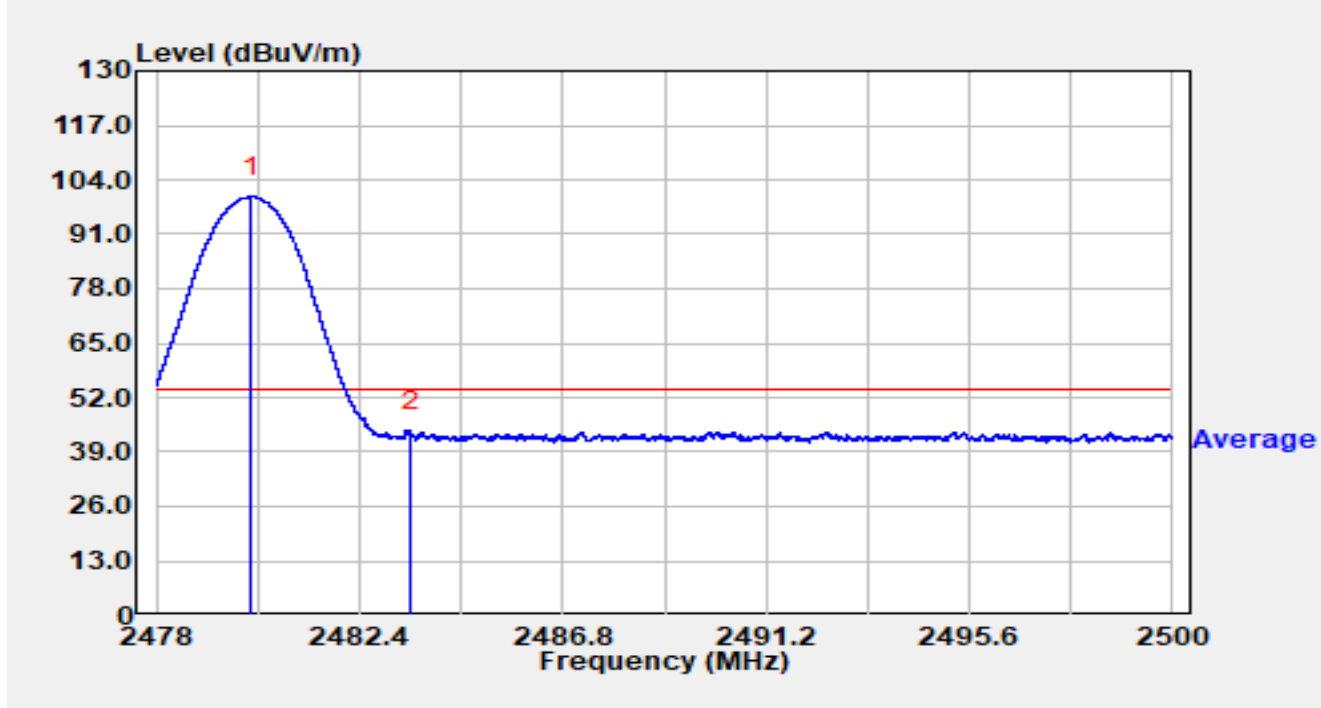


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2480.059	66.88	33.11	99.99	N/A	N/A	Average
2	*	2483.500	10.91	33.13	44.04	-9.96	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

A.8 AC Conducted Emissions Test Result

Site	SIP-SR2	Test Date	2025-02-07
Temperature	20.9 °C	Humidity	33.1 %
Limit	FCC Part 15.207_CE_Mains	Test Engineer	Henry Wang
Factor	ENV216_101684_E	Polarity	Line
EUT	Mobile Computer	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by BLE_125kbps at 2440MHz		

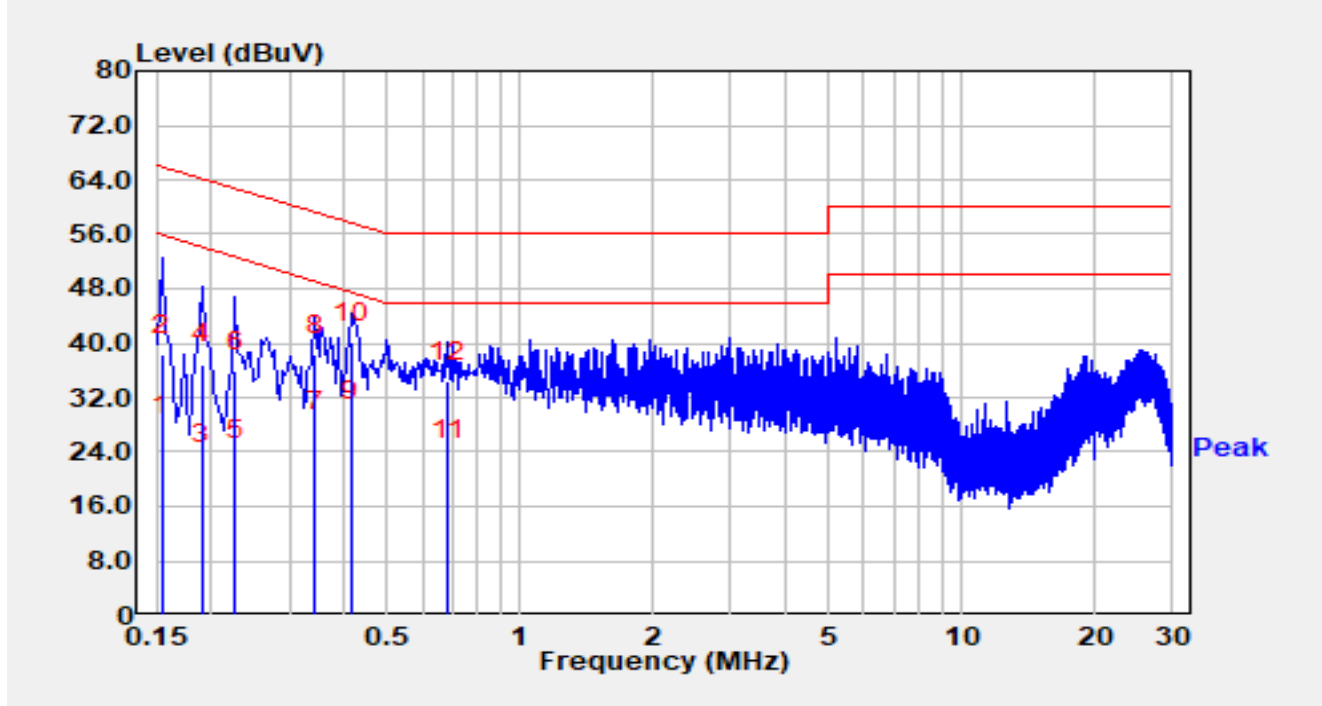


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.154	16.75	9.74	26.50	-29.28	55.78	Average
2		0.154	28.52	9.74	38.26	-27.52	65.78	QP
3		0.190	12.37	9.75	22.12	-31.91	54.04	Average
4		0.190	27.14	9.75	36.89	-27.14	64.04	QP
5		0.226	12.92	9.79	22.71	-29.88	52.60	Average
6		0.226	26.10	9.79	35.89	-26.70	62.60	QP
7		0.342	17.23	9.82	27.05	-22.11	49.15	Average
8		0.342	28.38	9.82	38.20	-20.96	59.15	QP
9		0.414	18.83	9.82	28.65	-18.92	47.57	Average
10	*	0.414	30.25	9.82	40.07	-17.50	57.57	QP
11		0.686	12.91	9.84	22.75	-23.25	46.00	Average
12		0.686	24.45	9.84	34.29	-21.71	56.00	QP

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
3. Measurement (dB μ V) = Reading (dB μ V) + C.F (dB).

Site	SIP-SR2	Test Date	2025-02-07
Temperature	20.9 °C	Humidity	33.1 %
Limit	FCC Part 15.207_CE_Mains	Test Engineer	Henry Wang
Factor	ENV216_101684_E	Polarity	Neutral
EUT	Mobile Computer	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by BLE_125kbps at 2440MHz		

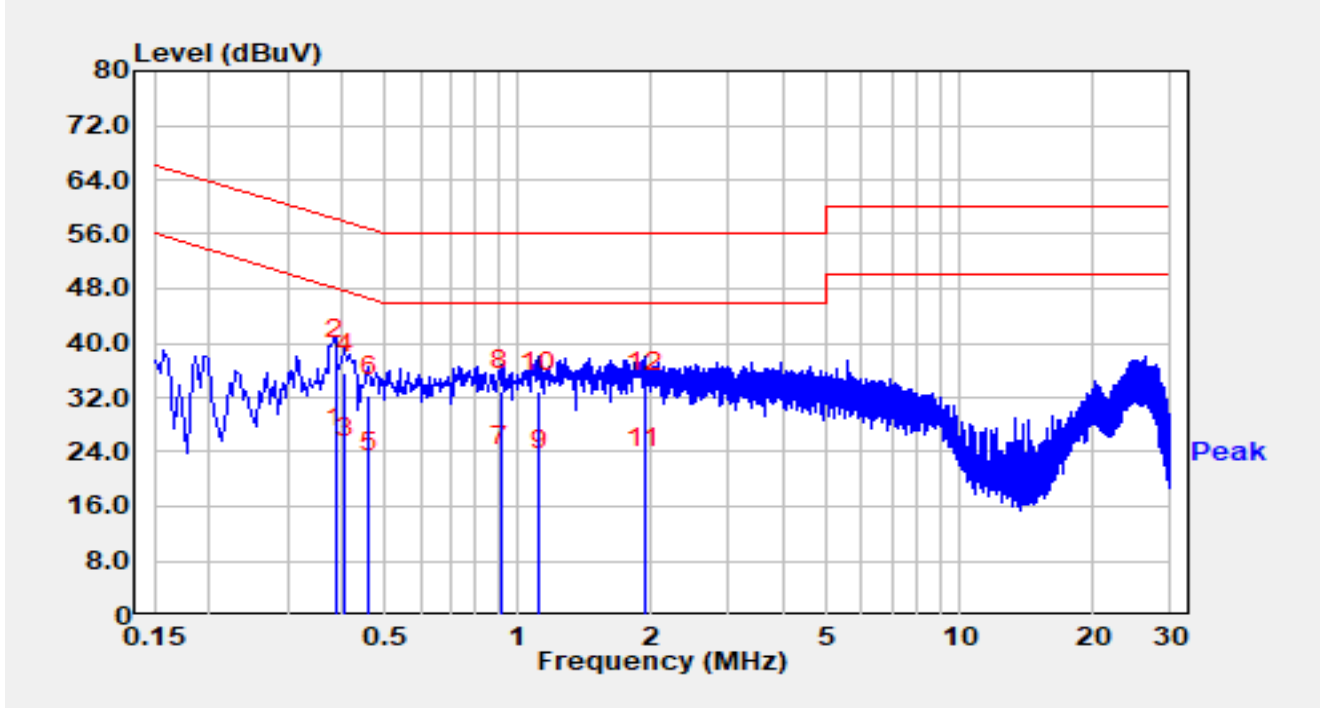

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.386	14.85	9.81	24.66	-23.49	48.15	Average
2	*	0.386	27.77	9.81	37.57	-20.58	58.15	QP
3		0.406	13.42	9.81	23.23	-24.50	47.73	Average
4		0.406	25.75	9.81	35.56	-22.17	57.73	QP
5		0.458	11.03	9.81	20.84	-25.89	46.73	Average
6		0.458	22.44	9.81	32.25	-24.48	56.73	QP
7		0.914	11.98	9.83	21.81	-24.19	46.00	Average
8		0.914	23.20	9.83	33.03	-22.97	56.00	QP
9		1.114	11.46	9.85	21.31	-24.69	46.00	Average
10		1.114	22.98	9.85	32.83	-23.17	56.00	QP
11		1.934	11.60	9.94	21.54	-24.46	46.00	Average
12		1.934	22.75	9.94	32.69	-23.31	56.00	QP

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
3. Measurement (dB μ V) = Reading (dB μ V) + C.F (dB).

Appendix B - Test Setup Photograph

Refer to “2412RSU045-UT” file.

Appendix C - EUT Photograph

Refer to “2412RSU045-UE” file.

The End
