## HAC\_E\_Dipole\_2450

Measurement performed on October 11, 2024 at 01:02

### **Device Under Test**

Manufacturer	Model	Dimensions [mm]	Speaker Position [mm]
		146.2 x 71.8 x 7.5	144.3

### **Hardware Setup**

Probe Name	Probe Calibration Date	DAE Name	DAE Calibration Date
EF3DV3 - SN4050	March 06, 2024	DAE4 Sn1691	April 19, 2024

## **Communication Systems**


Band Name	Communication Systems Name	Channel	Frequency [MHz]
CD2450V3	cw	50	2450.0

## **Grid Settings**

Extent X [mm]	Extent Y [mm]	Step X [mm]	Step Y [mm]	Distance [mm]
20.0	90.0	5.0	5.0	15.0

### **Results**

Dipole Type	Dipole Serial Number	Emax [V/m]	Drift [dB]
CD2450	1155	87.8	-0.05

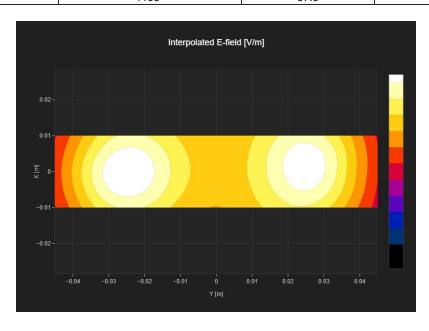

# HAC\_E\_Dipole\_2600

Measurement performed on October 11, 2024 at 01:19

### **Device Under Test**

Manufacturer	Model	Dimensions [mm]	Speaker Position [mm]
		146.2 x 71.8 x 7.5	144.3

### **Hardware Setup**

Probe Name	Probe Calibration Date	DAE Name	DAE Calibration Date
EF3DV3 - SN4050	March 06, 2024	DAE4 Sn1691	April 19, 2024

## **Communication Systems**

Band Name	Communication Systems Name	Channel	Frequency [MHz]
CD2600V3	cw	50	2600.0

## **Grid Settings**

Extent X [mm]	Extent Y [mm]	Step X [mm]	Step Y [mm]	Distance [mm]
20.0	90.0	5.0	5.0	15.0

### **Results**

Dipole Type	Dipole Serial Number	Emax [V/m]	Drift [dB]
CD2600	1030	87.1	-0.01

