



FCC RF Test Report

APPLICANT : Honeywell International Inc
EQUIPMENT : mobile computer
BRAND NAME : Honeywell
MODEL NAME : CT37X1N
FCC ID : HD5-CT37X1N
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : 15E 6 GHz Low Power Dual Client (6CD)
(Indoor Low Power UNII-5/6/7/8)
TEST DATE(S) : Sep. 26, 2024 ~ Oct. 20, 2024

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



Table of Contents

1	General Description	5
1.1	Applicant	5
1.2	Manufacturer	5
1.3	Product Feature of Equipment Under Test	5
1.4	Product Specification of Equipment Under Test	6
1.5	Modification of EUT	7
1.6	Testing Location	7
1.7	Test Software	7
1.8	Applicable Standards	7
2	Test Configuration of Equipment Under Test	8
2.1	Carrier Frequency and Channel	8
2.2	Test Mode	10
2.3	Connection Diagram of Test System	12
2.4	Support Unit used in test configuration and system	13
2.5	EUT Operation Test Setup	13
2.6	Measurement Results Explanation Example	13
3	Test Result	14
3.1	26dB & 99% Occupied Bandwidth Measurement	14
3.2	Maximum conducted Output Power and Fundamental Maximum EIRP Measurement	15
3.3	Fundamental Power Spectral Density Measurement	20
3.4	In-Band Emissions (Channel Mask)	22
3.5	Contention Based Protocol	24
3.6	Unwanted Emissions Measurement	33
3.7	AC Conducted Emission Measurement	37
3.8	Antenna Requirements	39
4	List of Measuring Equipment	41
5	Measurement Uncertainty	42
Appendix A. Conducted Test Results		
Appendix B. AC Conducted Emission Test Result		
Appendix C. Radiated Spurious Emission		
Appendix D. Duty Cycle Plots		
Appendix E. Setup Photographs		



History of this test report

Report No.	Version	Description	Issued Date
FR461912F	01	Initial issue of report	Nov. 05, 2024

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.407(a)(11)	26dB Emission Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Pass	-
3.2	15.407(a)(8)	Maximum Conducted Output Power	Reporting only	-
3.2	15.407(a)(8)	Fundamental Maximum EIRP	Pass	-
3.3	15.407(a)(8)	Fundamental Power Spectral Density	Pass	-
3.4	15.407(b)(7)	In-Band Emissions (Channel Mask)	Pass	-
3.5	15.407(d)(6)	Contention Based Protocol	Pass	
3.6	15.407(b)	Unwanted Emissions	Pass	Under limit 3.36 dB at 2483.50 MHz
3.7	15.207	AC Conducted Emission	Pass	Under limit 19.34 dB at 0.481 MHz
3.8	15.203 15.407(a)	Antenna Requirement	Pass	-

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Honeywell International Inc
9680 Old Bailes Rd, Fort Mill, SC 29707

1.2 Manufacturer

Honeywell International Inc
9680 Old Bailes Rd, Fort Mill, SC 29707

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	mobile computer
Brand Name	Honeywell
Model Name	CT37X1N
FCC ID	HD5-CT37X1N
IMEI Code	Conducted:990021480013927 Conduction: 990021480035045/990021480035052 Radiation: 990021480031093 CBP: 990021480036803
HW Version	V1.0
SW Version	OS.31.001-HON.31.001
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	U-NII-5: 5925 MHz ~ 6425 MHz U-NII-6: 6425 MHz ~ 6525 MHz U-NII-7: 6525 MHz ~ 6875 MHz U-NII-8: 6875 MHz ~ 7125 MHz
Maximum EIRP	<MIMO Ant.6+7> <5925 MHz ~ 7125 MHz > 802.11a : 7.27 dBm / 0.0053 W 802.11ax HE20 : 7.62 dBm / 0.0058 W 802.11ax HE40 : 10.81 dBm / 0.0121 W 802.11ax HE80 : 12.73 dBm / 0.0187 W 802.11ax HE160 : 15.44 dBm / 0.0350 W
99% Occupied Bandwidth	802.11a : 16.533 MHz 802.11ax HE20 : 18.914 MHz 802.11ax HE40 : 37.79 MHz 802.11ax HE80 : 76.952 MHz 802.11ax HE160 : 156.495 MHz
Antenna Type / Gain	<5925 MHz ~ 6425 MHz > <Ant. 6> : IFA Antenna with gain 2.70 dBi <Ant. 7> : IFA Antenna with gain 3.00 dBi <6425 MHz ~ 6525 MHz > <Ant. 6> : IFA Antenna with gain 0.40 dBi <Ant. 7> : IFA Antenna with gain 3.10 dBi <6525 MHz ~ 6875 MHz > <Ant. 6> : IFA Antenna with gain 0.60 dBi <Ant. 7> : IFA Antenna with gain 2.00 dBi <6875 MHz ~ 7125 MHz > <Ant. 6> : IFA Antenna with gain -1.00 dBi <Ant. 7> : IFA Antenna with gain 2.80 dBi
Type of Modulation	802.11a: OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ax: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM / 1024QAM)

Remark:

1. The device support WIFI MIMO CDD mode.
2. For WLAN SISO & MIMO mode, the whole testing has assessed only MIMO mode by referring to the higher output power.
3. The device supports Tx Beamforming mode, and the Tx Beamforming power/EIRP is not greater than CDD mode, so we only evaluate CDD mode by referring to their maximum conducted power.
4. 802.11ax support full RU tone and partial RU tone, both full RU and partial RU-left (for low CH) and partial RU-right (for high CH) are tested for conducted power/PSD/Channel Mask in appendix A, all the other test case were performed with full RU with its maximum power/PSD.
5. The EUT does not support channel puncturing mode.
6. The device does not support UNII-8 CH233 (BW=20M, Center Frequency = 7115MHz).
7. CBP test with antenna path of minimum gain (Antenna 6, Minimum gain= -1.00 dBi).



1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH06-KS TH01-KS DFS01-KS	CN1257	314309

1.7 Test Software

Item	Site	Manufacture	Name	Version
1.	03CH06-KS	AUDIX	E3	6.2009-8-24al
2.	CO01-KS	AUDIX	E3	6.2009-8-24

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC KDB 987594 D02 U-NII 6 GHz EMC Measurement v03
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

<U-NII-5, 6, 7, 8>

BW 20M	Channel	1	5	9	13	17	21	25	29
	Freq. (MHz)	5955	5975	5995	6015	6035	6055	6075	6095
BW 40M	Channel	3		11		19		27	
	Freq. (MHz)	5965		6005		6045		6085	
BW 80M	Channel	7				23			
	Freq. (MHz)	5985				6065			
BW 160M	Channel	15							
	Freq. (MHz)	6025							

BW 20M	Channel	33	37	41	45	49	53	57	61
	Freq. (MHz)	6115	6135	6155	6175	6195	6215	6235	6255
BW 40M	Channel	35		43		51		59	
	Freq. (MHz)	6125		6165		6205		6245	
BW 80M	Channel	39				55			
	Freq. (MHz)	6145				6225			
BW 160M	Channel	47							
	Freq. (MHz)	6185							

BW 20M	Channel	65	69	73	77	81	85	89	93
	Freq. (MHz)	6275	6295	6315	6335	6355	6375	6395	6415
BW 40M	Channel	67		75		83		91	
	Freq. (MHz)	6285		6325		6365		6405	
BW 80M	Channel	71				87			
	Freq. (MHz)	6305				6385			
BW 160M	Channel	79							
	Freq. (MHz)	6345							



BW 20M	Channel	97	101	105	109	113	117	121	125
	Freq. (MHz)	6435	6455	6475	6495	6515	6535	6555	6575
BW 40M	Channel	99		107		115		123	
	Freq. (MHz)	6445		6485		6525		6565	
BW 80M	Channel	103				119			
	Freq. (MHz)	6465				6545			
BW 160M	Channel	111							
	Freq. (MHz)	6505							

BW 20M	Channel	129	133	137	141	145	149	153	157
	Freq. (MHz)	6595	6615	6635	6655	6675	6695	6715	6735
BW 40M	Channel	131		139		147		155	
	Freq. (MHz)	6605		6645		6685		6725	
BW 80M	Channel	135				151			
	Freq. (MHz)	6625				6705			
BW 160M	Channel	143							
	Freq. (MHz)	6665							

BW 20M	Channel	161	165	169	173	177	181	185	189
	Freq. (MHz)	6755	6775	6795	6815	6835	6855	6875	6895
BW 40M	Channel	163		171		179		187	
	Freq. (MHz)	6765		6805		6845		6885	
BW 80M	Channel	167				183			
	Freq. (MHz)	6785				6865			
BW 160M	Channel	175							
	Freq. (MHz)	6825							

BW 20M	Channel	193	197	201	205	209	213	217	221
	Freq. (MHz)	6915	6935	6955	6975	6995	7015	7035	7055
BW 40M	Channel	195		203		211		219	
	Freq. (MHz)	6925		6965		7005		7045	
BW 80M	Channel	199				215			
	Freq. (MHz)	6945				7025			
BW 160M	Channel	207							
	Freq. (MHz)	6985							

BW 20M	Channel	225	229	-
	Freq. (MHz)	7075	7095	-
BW 40M	Channel	227		
	Freq. (MHz)	7085		



2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11a	6 Mbps
802.11ax HE20	MCS0
802.11ax HE40	MCS0
802.11ax HE80	MCS0
802.11ax HE160	MCS0

Test Cases	
AC Conducted Emission	Mode 1 : WLAN Link(6G)+ BT Link1+ USB Cable (Charging From Adapter)
Remark: 1. For Radiated Test Cases, the tests were performed with Adapter and USB Cable 2. Bluetooth Link 1 is a Bluetooth module 1 which could normal link.	

Ch. #		5925-6425 MHz UNII-5	6425-6525 MHz UNII-6	6525-6875 MHz UNII-7	6875-7125 MHz UNII-8
		802.11a/ax HE20	802.11a/ax HE20	802.11a/ax HE20	802.11a/ax HE20
L	Low	001	097	117	189
M	Middle	045	105	149	209
H	High	093	113	181	229
Straddle		-	-	-	185

Ch. #		5925-6425 MHz UNII-5	6425-6525 MHz UNII-6	6525-6875 MHz UNII-7	6875-7125 MHz UNII-8
		802.11ax HE40	802.11ax HE40	802.11ax HE40	802.11ax HE40
L	Low	003	099	123	195
M	Middle	043	-	147	203
H	High	091	107	179	227
Straddle		-	115	-	187


Ch. #		5925-6425 MHz UNII-5	6425-6525 MHz UNII-6	6525-6875 MHz UNII-7	6875-7125 MHz UNII-8
		802.11ax HE80	802.11ax HE80	802.11ax HE80	802.11ax HE80
L	Low	007	103	135	199
M	Middle	039		151	-
H	High	087		167	215
Straddle		-	119	183	-

Ch. #		5925-6425 MHz UNII-5	6425-6525 MHz UNII-6	6525-6875 MHz UNII-7	6875-7125 MHz UNII-8
		802.11ax HE160	802.11ax HE160	802.11ax HE160	802.11ax HE160
L	Low	015	-	143	207
M	Middle	047			
H	High	079			
Straddle		-	111	175	-


Remark: For radiation spurious emission, the final modulation and the worst data rate was reference the max RF conducted power.

2.3 Connection Diagram of Test System

For AC Conducted Emission

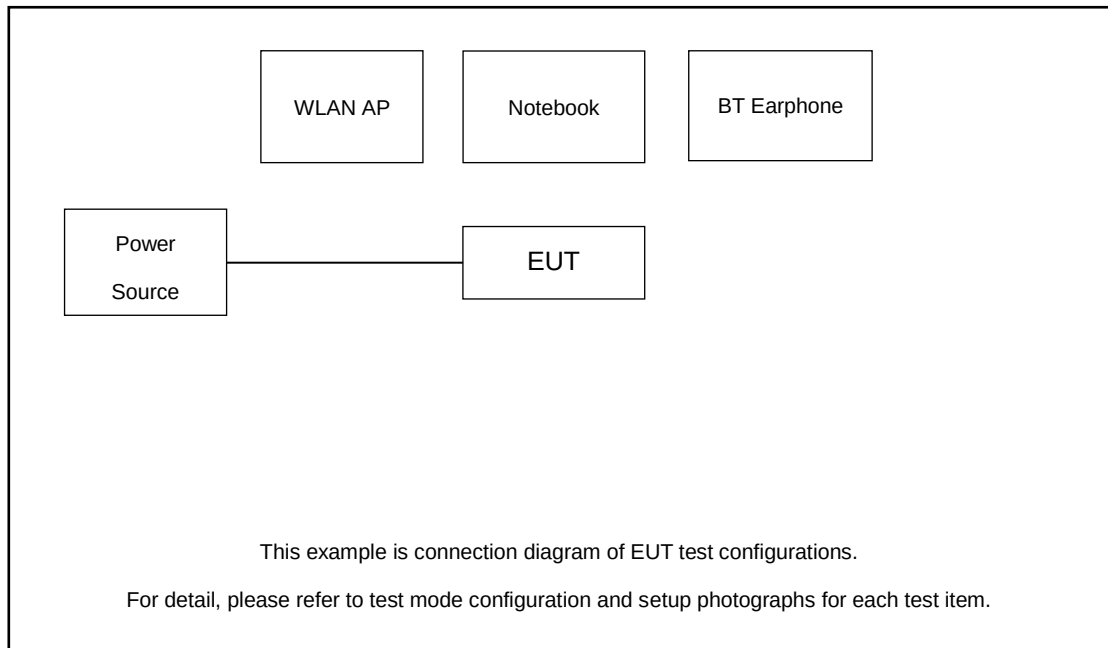

For Radiated Emission

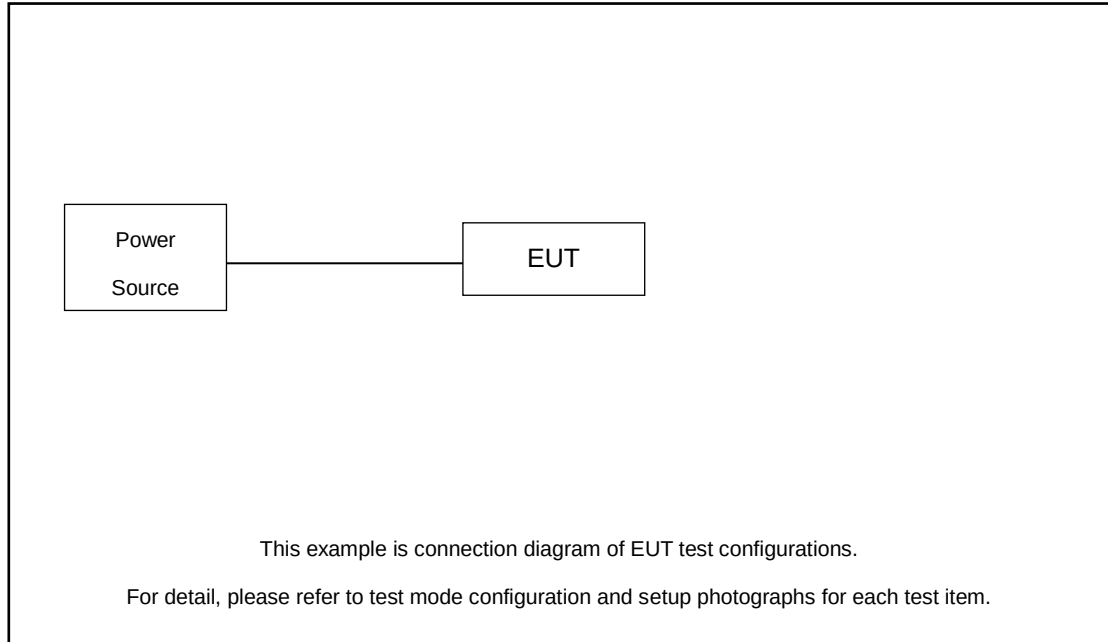

2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Bluetooth Earphone	Lenovo	thinkplus-BH3	N/A	N/A	N/A
2.	Notebook	Lenovo	G480	QDS-BRCM1050I	N/A	shielded cable DC O/P 1.8m , Unshielded AC I/P cable 1.8m
3.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded,1.8m
4.	USB Cable	N/A	N/A	N/A	N/A	N/A
5.	Adapter	N/A	N/A	N/A	N/A	N/A
6.	SD Card	Kingston	8GB	N/A	N/A	N/A

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program (QRCT TX Tool) was provided and enabled to make EUT continuously transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 5.39 dB and 20dB attenuator.

$$\begin{aligned}
 \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\
 &= 5.39 + 20 = 25.39 \text{ (dB)}
 \end{aligned}$$

3 Test Result

3.1 26dB & 99% Occupied Bandwidth Measurement

3.1.1 CFR 15.407 (a)(11)

The maximum transmitter channel bandwidth for U-NII devices in the 5.925-7.125 GHz band is 320 megahertz.


3.1.2 Measuring Instruments

See list of measuring equipment of this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section C) Emission bandwidth
2. Set RBW = approximately 1% of the emission bandwidth.
3. Set the VBW > RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
7. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) $\geq 3 * RBW$.
8. Measure and record the results in the test report.

3.1.4 Test Setup

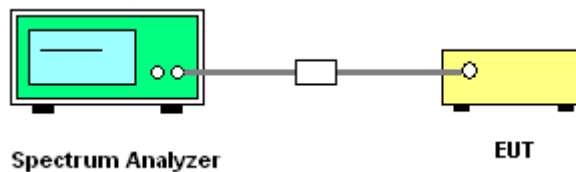

3.1.5 Test Result of 26dB & 99% Occupied Bandwidth

Please refer to Appendix A.

3.2 Maximum conducted Output Power and Fundamental Maximum EIRP Measurement

3.2.1 Limit of Fundamental Maximum EIRP

<FCC 14-30 CFR 15.407>

(a)(8) For client devices operating under the control of an indoor access point in the 5.925-7.125 GHz bands, the maximum e.i.r.p. over the frequency band of operation must not exceed 24 dBm.

3.2.2 Measuring Instruments

See list of measuring equipment of this test report.


3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.
4. For MIMO mode, the measure-and-sum technique should be used for measuring the in-band transmit power of a device.

3.2.4 Test Setup

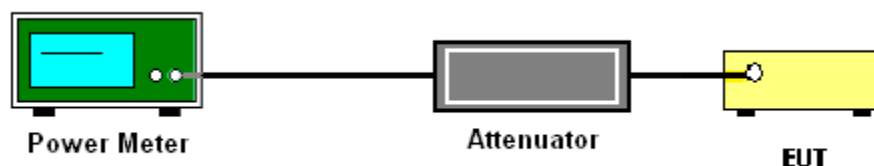



3.2.5 Test Result of Fundamental Maximum EIRP

U-NII 5 MIMO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
					Ant 6	Ant 7	Ant 6	Ant 7	SUM	Ant 6	Ant 7				SUM	Ant 6
11a	6Mbps	2	001	5955	0.04	0.03	-0.89	0.17	2.68	3.00	5.68	24.00	Pass	-1		
11a	6Mbps	2	045	6175	0.04	0.03	-0.84	0.01	2.62	3.00	5.62	24.00	Pass	-0.5		
11a	6Mbps	2	093	6415	0.04	0.03	-1.59	0.80	2.78	3.00	5.78	24.00	Pass	0.5		

U-NII 6 MIMO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
11a	6Mbps	2	097	6435	0.04	0.03	-0.43	1.76	3.81	3.10	6.91	24.00	Pass	-0.5		
11a	6Mbps	2	105	6475	0.04	0.03	-0.04	1.94	4.07	3.10	7.17	24.00	Pass	0		
11a	6Mbps	2	113	6515	0.04	0.03	-0.21	1.90	3.98	3.10	7.08	24.00	Pass	0		

U-NII 7 MIMO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
					Ant 6	Ant 7	Ant 6	Ant 7	SUM	Ant 6	Ant 7	SUM				Ant 6
11a	6Mbps	2	117	6535	0.04	0.03	0.36	1.91	4.21	2.00		6.21	24.00	Pass	0	
11a	6Mbps	2	149	6695	0.04	0.03	0.75	1.79	4.31	2.00		6.31	24.00	Pass	0.5	
11a	6Mbps	2	181	6855	0.04	0.03	1.85	1.74	4.80	2.00		6.80	24.00	Pass	1	



U-NII 8 MIMO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
					Ant 6	Ant 7	Ant 6	Ant 7	SUM	Ant 6	Ant 7	SUM			Ant 6	Ant 7
11a	6Mbps	2	185	6875	0.04	0.03	0.55	1.95	4.32	2.80	7.12	24.00	Pass	0.5		
11a	6Mbps	2	189	6895	0.04	0.03	0.88	1.98	4.47	2.80	7.27	24.00	Pass	0.5		
11a	6Mbps	2	209	6995	0.04	0.03	0.29	1.15	3.75	2.80	6.55	24.00	Pass	0		
11a	6Mbps	2	229	7095	0.04	0.03	-0.14	1.26	3.63	2.80	6.43	24.00	Pass	0		

U-NII 5 MIMO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 6	Ant 7	Ant 6	Ant 7	SUM	Ant 6	Ant 7				SUM	Ant 6
HE20	MCS0	2	001	5955	Full	0.00	0.00	-0.19	0.79	3.34	3.00	6.34	24.00	Pass	0		
HE20	MCS0	2	001	5955	26/0	0.00	0.00	-8.18	-7.53	-4.83	3.00	-1.83	24.00	Pass	-7.5		
HE20	MCS0	2	001	5955	52/37	0.00	0.00	-5.37	-4.48	-1.89	3.00	1.11	24.00	Pass	-4.5		
HE20	MCS0	2	001	5955	106/53	0.00	0.00	-2.72	-1.38	1.01	3.00	4.01	24.00	Pass	-1.5		
HE20	MCS0	2	045	6175	Full	0.00	0.00	-0.16	0.62	3.26	3.00	6.26	24.00	Pass	0.5		
HE20	MCS0	2	045	6175	26/0	0.00	0.00	-7.58	-7.12	-4.33	3.00	-1.33	24.00	Pass	-7		
HE20	MCS0	2	045	6175	52/37	0.00	0.00	-4.96	-4.13	-1.51	3.00	1.49	24.00	Pass	-4		
HE20	MCS0	2	045	6175	106/53	0.00	0.00	-2.39	-0.99	1.38	3.00	4.38	24.00	Pass	-1		
HE20	MCS0	2	093	6415	Full	0.00	0.00	-0.64	0.67	3.07	3.00	6.07	24.00	Pass	1		
HE20	MCS0	2	093	6415	26/8	0.00	0.00	-9.17	-7.29	-5.12	3.00	-2.12	24.00	Pass	-6.5		
HE20	MCS0	2	093	6415	52/40	0.00	0.00	-6.92	-4.84	-2.75	3.00	0.25	24.00	Pass	-4		
HE20	MCS0	2	093	6415	106/54	0.00	0.00	-4.45	-1.67	0.17	3.00	3.17	24.00	Pass	-1		
HE40	MCS0	2	003	5965	Full	0.00	0.00	2.21	1.97	5.10	3.00	8.10	24.00	Pass	1		
HE40	MCS0	2	043	6165	Full	0.00	0.00	3.03	2.87	5.96	3.00	8.96	24.00	Pass	1.5		
HE40	MCS0	2	091	6405	Full	0.00	0.00	2.79	3.25	6.04	3.00	9.04	24.00	Pass	1.5		
HE80	MCS0	2	007	5985	Full	0.00	0.00	5.01	4.89	7.96	3.00	10.96	24.00	Pass	4		
HE80	MCS0	2	039	6145	Full	0.00	0.00	5.18	5.17	8.19	3.00	11.19	24.00	Pass	4		
HE80	MCS0	2	087	6385	Full	0.00	0.00	4.48	5.21	7.87	3.00	10.87	24.00	Pass	3.5		
HE160	MCS0	2	015	6025	Full	0.00	0.00	7.98	8.62	11.32	3.00	14.32	24.00	Pass	7		
HE160	MCS0	2	047	6185	Full	0.00	0.00	7.64	8.12	10.90	3.00	13.90	24.00	Pass	7		
HE160	MCS0	2	079	6345	Full	0.00	0.00	7.83	8.81	11.36	3.00	14.36	24.00	Pass	7.5		



U-NII 6 MIMO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 6	Ant 7	Ant 6	Ant 7	SUM	Ant 6	Ant 7				SUM	Ant 6
HE20	MCS0	2	097	6435	Full	0.00	0.00	-0.36	1.85	3.89	3.10	6.99	24.00	Pass	0		
HE20	MCS0	2	097	6435	26/0	0.00	0.00	-7.92	-7.86	-4.88	3.10	-1.78	24.00	Pass	-7.5		
HE20	MCS0	2	097	6435	52/37	0.00	0.00	-5.68	-3.83	-1.65	3.10	1.45	24.00	Pass	-5		
HE20	MCS0	2	097	6435	106/53	0.00	0.00	-3.12	-0.83	1.18	3.10	4.28	24.00	Pass	-2		
HE20	MCS0	2	105	6475	Full	0.00	0.00	0.08	2.04	4.18	3.10	7.28	24.00	Pass	0.5		
HE20	MCS0	2	105	6475	26/0	0.00	0.00	-8.22	-6.48	-4.25	3.10	-1.15	24.00	Pass	-7.5		
HE20	MCS0	2	105	6475	52/37	0.00	0.00	-5.48	-3.66	-1.47	3.10	1.63	24.00	Pass	-4.5		
HE20	MCS0	2	105	6475	106/53	0.00	0.00	-2.82	-0.63	1.42	3.10	4.52	24.00	Pass	-1.5		
HE20	MCS0	2	113	6515	Full	0.00	0.00	-0.05	2.07	4.15	3.10	7.25	24.00	Pass	0.5		
HE20	MCS0	2	113	6515	26/8	0.00	0.00	-8.58	-6.32	-4.29	3.10	-1.19	24.00	Pass	-7.5		
HE20	MCS0	2	113	6515	52/40	0.00	0.00	-6.02	-3.79	-1.75	3.10	1.35	24.00	Pass	-4.5		
HE20	MCS0	2	113	6515	106/54	0.00	0.00	-2.95	-0.64	1.37	3.10	4.47	24.00	Pass	-1.5		
HE40	MCS0	2	099	6445	Full	0.00	0.00	3.03	4.56	6.87	3.10	9.97	24.00	Pass	2		
HE40	MCS0	2	107	6485	Full	0.00	0.00	2.89	4.39	6.71	3.10	9.81	24.00	Pass	2		
HE40	MCS0	2	115	6525	Full	0.00	0.00	2.74	4.25	6.57	3.10	9.67	24.00	Pass	2		
HE80	MCS0	2	103	6465	Full	0.00	0.00	5.56	7.04	9.37	3.10	12.47	24.00	Pass	5		
HE80	MCS0	2	119	6545	Full	0.00	0.00	6.18	6.63	9.42	3.10	12.52	24.00	Pass	5.5		
HE160	MCS0	2	111	6505	Full	0.00	0.00	7.84	9.59	11.81	3.10	14.91	24.00	Pass	7.5		

U-NII 7 MIMO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 6	Ant 7	Ant 6	Ant 7	SUM	Ant 6	Ant 7				SUM	Ant 6
HE20	MCS0	2	117	6535	Full	0.00	0.00	1.68	2.26	4.99	2.00	6.99	24.00	Pass	1		
HE20	MCS0	2	117	6535	26/0	0.00	0.00	-7.53	-5.99	-3.68	2.00	-1.68	24.00	Pass	-7		
HE20	MCS0	2	117	6535	52/37	0.00	0.00	-5.03	-3.13	-0.97	2.00	1.03	24.00	Pass	-4		
HE20	MCS0	2	117	6535	106/53	0.00	0.00	-1.92	-0.07	2.11	2.00	4.11	24.00	Pass	-1		
HE20	MCS0	2	149	6695	Full	0.00	0.00	1.62	2.04	4.85	2.00	6.85	24.00	Pass	1		
HE20	MCS0	2	149	6695	26/0	0.00	0.00	-6.52	-5.42	-2.92	2.00	-0.92	24.00	Pass	-6		
HE20	MCS0	2	149	6695	52/37	0.00	0.00	-3.63	-2.75	-0.16	2.00	1.84	24.00	Pass	-3		
HE20	MCS0	2	149	6695	106/53	0.00	0.00	-1.41	-0.09	2.31	2.00	4.31	24.00	Pass	-0.5		
HE20	MCS0	2	181	6855	Full	0.00	0.00	1.96	1.91	4.95	2.00	6.95	24.00	Pass	1.5		
HE20	MCS0	2	181	6855	26/8	0.00	0.00	-7.29	-5.91	-3.54	2.00	-1.54	24.00	Pass	-6.5		
HE20	MCS0	2	181	6855	52/40	0.00	0.00	-4.46	-3.02	-0.67	2.00	1.33	24.00	Pass	-3.5		
HE20	MCS0	2	181	6855	106/54	0.00	0.00	-1.78	0.04	2.23	2.00	4.23	24.00	Pass	-0.5		
HE40	MCS0	2	123	6565	Full	0.00	0.00	4.06	5.23	7.69	2.00	9.69	24.00	Pass	3		
HE40	MCS0	2	147	6685	Full	0.00	0.00	4.62	4.48	7.56	2.00	9.56	24.00	Pass	3		



HE40	MCS0	2	179	6845	Full	0.00	0.00	4.76	5.19	7.99	2.00	9.99	24.00	Pass	4
HE80	MCS0	2	135	6625	Full	0.00	0.00	6.99	7.18	10.10	2.00	12.10	24.00	Pass	6
HE80	MCS0	2	151	6705	Full	0.00	0.00	7.02	6.93	9.99	2.00	11.99	24.00	Pass	6
HE80	MCS0	2	167	6785	Full	0.00	0.00	6.88	6.75	9.83	2.00	11.83	24.00	Pass	6
HE160	MCS0	2	143	6665	Full	0.00	0.00	9.35	9.87	12.63	2.00	14.63	24.00	Pass	7.5

U-NII 8 MIMO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 6	Ant 7	Ant 6	Ant 7	SUM	Ant 6	Ant 7				SUM	Ant 6
HE20	MCS0	2	185	6875	Full	0.00	0.00	1.44	1.42	4.44	2.80	7.24	24.00	Pass	1		
HE20	MCS0	2	185	6875	26/8	0.00	0.00	-7.29	-5.93	-3.55	2.80	-0.75	24.00	Pass	-6.5		
HE20	MCS0	2	185	6875	52/40	0.00	0.00	-4.54	-3.12	-0.76	2.80	2.04	24.00	Pass	-3.5		
HE20	MCS0	2	185	6875	106/54	0.00	0.00	-1.74	-0.12	2.16	2.80	4.96	24.00	Pass	-0.5		
HE20	MCS0	2	189	6895	Full	0.00	0.00	1.76	1.85	4.82	2.80	7.62	24.00	Pass	1		
HE20	MCS0	2	189	6895	26/0	0.00	0.00	-6.83	-5.63	-3.18	2.80	-0.38	24.00	Pass	-6.5		
HE20	MCS0	2	189	6895	52/37	0.00	0.00	-4.38	-2.98	-0.61	2.80	2.19	24.00	Pass	-3.5		
HE20	MCS0	2	189	6895	106/53	0.00	0.00	-1.32	0.16	2.49	2.80	5.29	24.00	Pass	-0.5		
HE20	MCS0	2	209	6995	Full	0.00	0.00	0.25	1.33	3.83	2.80	6.63	24.00	Pass	0.5		
HE20	MCS0	2	209	6995	26/0	0.00	0.00	-6.84	-6.14	-3.47	2.80	-0.67	24.00	Pass	-6.5		
HE20	MCS0	2	209	6995	52/37	0.00	0.00	-3.91	-3.28	-0.57	2.80	2.23	24.00	Pass	-3.5		
HE20	MCS0	2	209	6995	106/53	0.00	0.00	-1.19	-0.18	2.35	2.80	5.15	24.00	Pass	-0.5		
HE20	MCS0	2	229	7095	Full	0.00	0.00	0.01	1.39	3.76	2.80	6.56	24.00	Pass	0.5		
HE20	MCS0	2	229	7095	26/8	0.00	0.00	-7.74	-6.79	-4.23	2.80	-1.43	24.00	Pass	-7		
HE20	MCS0	2	229	7095	52/40	0.00	0.00	-4.87	-3.77	-1.27	2.80	1.53	24.00	Pass	-4		
HE20	MCS0	2	229	7095	106/54	0.00	0.00	-2.16	-0.64	1.68	2.80	4.48	24.00	Pass	-1		
HE40	MCS0	2	187	6885	Full	0.00	0.00	4.41	4.47	7.45	2.80	10.25	24.00	Pass	3.5		
HE40	MCS0	2	195	6925	Full	0.00	0.00	4.76	5.23	8.01	2.80	10.81	24.00	Pass	3.5		
HE40	MCS0	2	203	6965	Full	0.00	0.00	4.62	5.01	7.83	2.80	10.63	24.00	Pass	3.5		
HE40	MCS0	2	227	7085	Full	0.00	0.00	3.58	3.37	6.49	2.80	9.29	24.00	Pass	2.5		
HE80	MCS0	2	183	6865	Full	0.00	0.00	6.67	6.81	9.75	2.80	12.55	24.00	Pass	5.5		
HE80	MCS0	2	199	6945	Full	0.00	0.00	7.07	6.76	9.93	2.80	12.73	24.00	Pass	5.5		
HE80	MCS0	2	215	7025	Full	0.00	0.00	6.39	5.81	9.12	2.80	11.92	24.00	Pass	5		
HE160	MCS0	2	175	6825	Full	0.00	0.00	9.03	9.75	12.42	2.80	15.22	24.00	Pass	7.5		
HE160	MCS0	2	207	6985	Full	0.00	0.00	9.71	9.55	12.64	2.80	15.44	24.00	Pass	7.5		

3.3 Fundamental Power Spectral Density Measurement

3.3.1 Limit of Fundamental Power Spectral Density

<FCC 14-30 CFR 15.407>

(a)(8) For client devices operating under the control of an indoor access point in the 5.925-7.125 GHz bands, the maximum power spectral density must not exceed -1 dBm e.i.r.p. in any 1-megahertz band.

3.3.2 Measuring Instruments

See list of measuring equipment of this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Section F) Maximum power spectral density.

Method SA-2


(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
 - Set span to encompass the entire emission bandwidth (EBW) of the signal.
 - Set RBW = 1 MHz.
 - Set VBW $\geq$ 3 MHz.
 - Number of points in sweep $\geq$ 2 Span / RBW.
 - Sweep time = auto.
 - Detector = RMS
 - Trace average at least 100 traces in power averaging mode.
 - Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.
1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
 2. Each plot has already offset with cable loss, attenuator loss and duty factor. Measure the PPSD and record it.
 3. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Method (b): Measure and sum spectral maxima across the outputs.

The measurement on each individual output were performed with the same span and number on each individual output. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs.

3.3.4 Test Setup

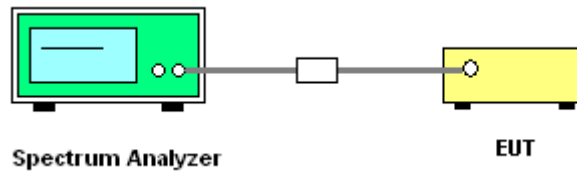

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.4 In-Band Emissions (Channel Mask)

3.4.1 Limit of Unwanted Emissions

<FCC 14-30 CFR 15.407>

(b)(7) For transmitters operating within the 5.925-7.125 GHz bands: Power spectral density must be suppressed by 20 dB at 1 MHz outside of channel edge, by 28 dB at one channel bandwidth from the channel center, and by 40 dB at one- and one-half times the channel bandwidth away from channel center. At frequencies between one megahertz outside an unlicensed device's channel edge and one channel bandwidth from the center of the channel, the limits must be linearly interpolated between 20 dB and 28 dB suppression, and at frequencies between one and one- and one-half times an unlicensed device's channel bandwidth, the limits must be linearly interpolated between 28 dB and 40 dB suppression. Emissions removed from the channel center by more than one- and one-half times the channel bandwidth must be suppressed by at least 40 dB.

3.4.2 Measuring Instruments

See list of measuring equipment of this test report.

3.4.3 Test Procedures


The testing follows FCC KDB 987594 D02 U-NII 6GHz EMC Measurement.

Section J) In-Band Emissions.

1. Take nominal bandwidth as reference channel bandwidth provided that 26 dB emission bandwidth is always larger than nominal bandwidth
2. Measure the power spectral density (which will be used for emissions mask reference) using the following procedure:
 - a) Set the span to encompass the entire 26 dB EBW of the signal.
 - b) Set RBW = same RBW used for 26 dB EBW measurement.
 - c) Set VBW $\geq 3 \times$ RBW
 - d) Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$.
 - e) Sweep time = auto.
 - f) Detector = RMS (i.e., power averaging)
 - g) Trace average at least 100 traces in power averaging (rms) mode.
 - h) Use the peak search function on the instrument to find the peak of the spectrum.
3. Using the measuring equipment limit line function, develop the emissions mask based on the following requirements. The emissions power spectral density must be reduced below the peak power spectral density (in dB) as follows:
 - a. Suppressed by 20 dB at 1 MHz outside of the channel edge.
 - b. Suppressed by 28 dB at one channel bandwidth from the channel center.

- c. Suppressed by 40 dB at one- and one-half times the channel bandwidth from the channel center.
4. Adjust the span to encompass the entire mask as necessary.
5. Clear trace.
6. Trace average at least 100 traces in power averaging (rms) mode.
7. Adjust the reference level as necessary so that the crest of the channel touches the top of the emission mask.

3.4.4 Test Setup

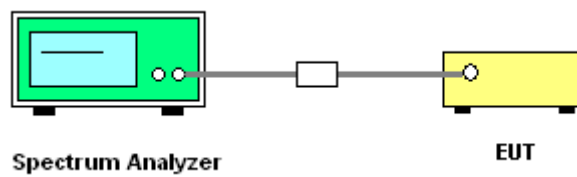

3.4.5 Test Result

Please refer to Appendix A.

3.5 Contention Based Protocol

3.5.1 Limit of Contention Based Protocol

<FCC 14-30 CFR 15.407>

(d)(6) All U-NII transmitters, except for standard power access points and fixed client devices, operating in the 5.925-7.125 GHz band must employ a contention-based protocol.

Unlicensed low-power indoor devices must detect co-channel radio frequency power that is at least -62 dBm or lower. Upon detection of energy in the band, unlicensed low power indoor devices must vacate the channel and stay off the channel as long as detected radio frequency power is equal to or greater than the threshold (-62 dBm). The -62 dBm (or lower) threshold is referenced to a 0 dBi antenna gain. To ensure incumbent operations are reliably detected in the band, low power indoor devices must detect RF energy throughout their intended operating channel. For example, an 802.11 device that plans to transmit a 40 MHz- wide signal (on a primary 20 MHz channel and a secondary 20 MHz channel) must detect energy throughout the entire 40 MHz channel. Additionally, low-power indoor devices must detect co-channel energy with 90% or greater certainty.

Table 1. Criteria to determine number of times detection threshold test may be performed

If	Number of Tests	Placement of Incumbent Transmission
$BW_{EUT} \leq BW_{Inc}$	Once	Tune incumbent and EUT transmissions ($f_{c1} = f_{c2}$)
$BW_{Inc} < BW_{EUT} \leq 2BW_{Inc}$	Once	Incumbent transmission is contained within BW_{EUT}
$2BW_{Inc} < BW_{EUT} \leq 4BW_{Inc}$	Twice. Incumbent transmission is contained within BW_{EUT}	Incumbent transmission is located as closely as possible to the lower edge and upper edge, respectively, of the EUT channel
$BW_{EUT} > 4BW_{Inc}$	Three times	Incumbent transmission is located as closely as possible to the lower edge of the EUT channel, in the middle of EUT channel, and as closely as possible to the upper edge of the EUT channel


where:

BW_{EUT} : Transmission bandwidth of EUT signal

BW_{Inc} : Transmission bandwidth of the simulated incumbent signal (10 MHz wide AWGN signal)

f_{c1} : Center frequency of EUT transmission

f_{c2} : Center frequency of simulated incumbent signal

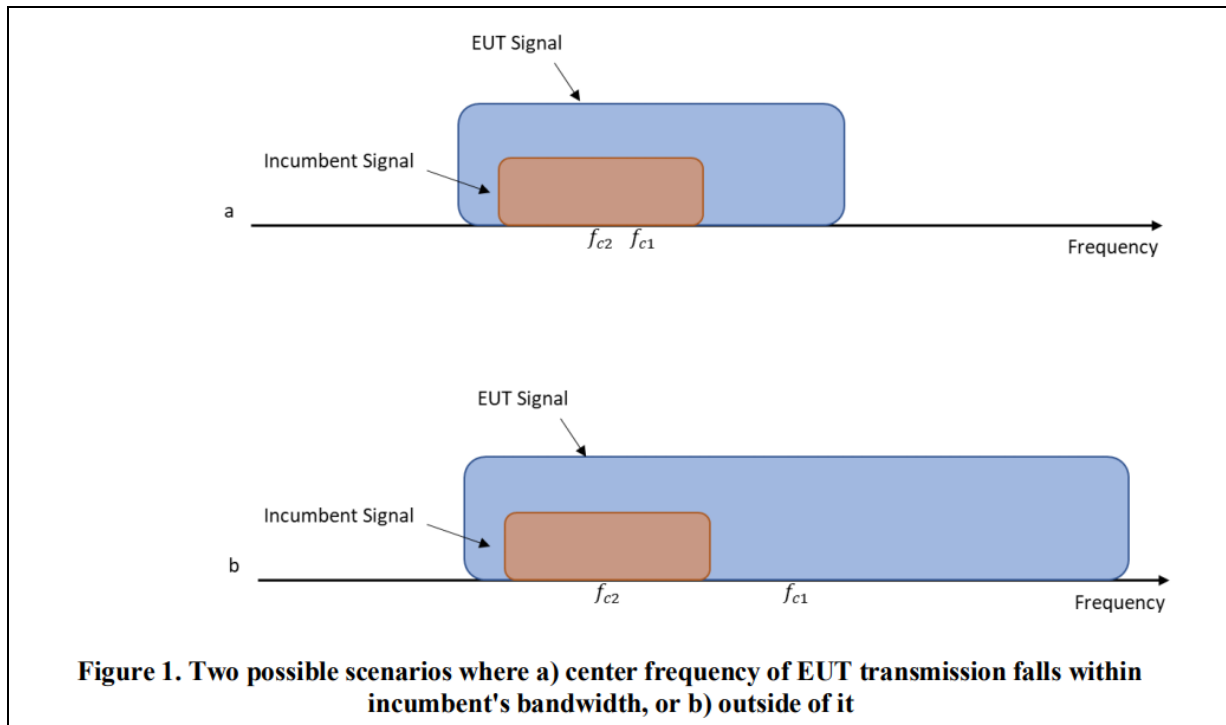

3.5.2 Measuring Instruments

See list of measuring equipment of this test report.


3.5.3 Test Procedures

1. To ensure EUT reliably detects an incumbent signal in both scenarios shown in Figure 1, the detection threshold test may be repeated more than once with the incumbent signal (having center frequency f_{c2}) tuned to different center frequencies within the UT transmission bandwidth. The criteria specified in Table 1 determines how many times the detection threshold test must be performed
2. Using an AWGN signal source, generate (but do not transmit, i.e., RF OFF) a 10 MHz-wide AWGN signal. Use Table 1 to determine the center frequency of the 10 MHz AWGN signal relative to the EUT's channel bandwidth and center frequency.
3. Monitor the signal analyzer to verify if the AWGN signal has been detected and the EUT has ceased transmission. If the EUT continues to transmit, then incrementally increase the AWGN signal power level until the EUT stops transmitting.
4. (Including all losses in the RF paths) Determine and record the AWGN signal power level (at the EUT's antenna port) at which the EUT ceased transmission. Repeat the procedure at least 10 times to verify the EUT can detect an AWGN signal with 90% (or better) level of certainty.
5. Refer to Table 1 to determine number of times the detection threshold testing needs to be repeated. If testing is required more than once, then go back to step 2, choose a different center

frequency for the AWGN signal and repeat the process.

6. EUT was driven in MIMO mode, the interferer signal was injected to both chains to monitor the performance, while the interferer level is determined according to the lowest antenna gain among both antennas.

3.5.4 Test Setup

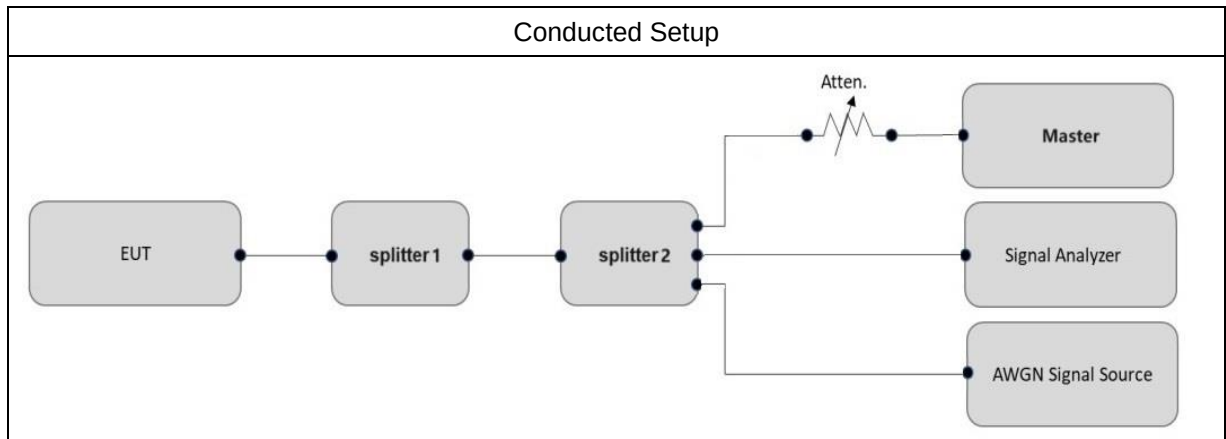

3.5.5 Support Unit used in test configuration and system

Instrument	Brand Name	Model No.	Characteristics
Signal Generator	Keysight	5182B/5182BX07	9KHz~7.2GHz
Spectrum Analyzer	R&S	FSV40	10kHz~40GHz
Terminal (NB Server)	DELL	P78G	LAN
Combiner (splitter1)	Tojoin	N/A	2G~8GHz
Combiner (splitter2)	MTJ Cooperation	MTJ7144-M	0.5GHz~18GHz
Attenuator	Keysight	8494B	0-110dBm
WLAN AP	ASUS	GT-AXE11000	Dual Band AP

3.5.6 Test Summary of Contention Based Protocol Test

Band	Channel Freq. (MHz)	Channel BW (MHz)	Incumbent freq. (MHz)	Injected AWGN Level (dBm)	Detection Rate (%)	Regulated Threshold level (dBm)	Adjusted Power (dBm)	Margin (dB)
UNII Band 5	6135	20	6135	-70.70	100	-62	-69.7	7.7
				Result: Stop Transmission				
				-71.70	< 90	-62	-70.7	8.7
				Result: Minimal Operation				
				-73.51	0	-62	-72.51	10.51
				Result: Normal Operation				
	6185	160	6110	-70.40	100	-62	-69.4	7.4
				Result: Stop Transmission				
				-71.40	< 90	-62	-70.4	8.4
				Result: Minimal Operation				
				-73.06	0	-62	-72.06	10.06
				Result: Normal Operation				
			6185	-67.30	100	-62	-66.3	4.3
				Result: Stop Transmission				
				-68.30	< 90	-62	-67.3	5.3
				Result: Minimal Operation				
				-69.10	0	-62	-68.1	6.1
				Result: Normal Operation				
			6260	-69.85	100	-62	-68.85	6.85
				Result: Stop Transmission				
				-70.85	< 90	-62	-69.85	7.85
				Result: Minimal Operation				
				-72.51	0	-62	-71.51	9.51
				Result: Normal Operation				

Note 1: Adjusted Power = Injected AWGN Level - minimum antenna gain (Antenna 6, gain = -1.00dBi)

Note 2: Path Loss between antenna and RF connector is negligible. (0 dB)

Note 3: Margin = Regulated Threshold level - Adjusted Power



Band	Channel Freq. (MHz)	Channel BW (MHz)	Incumbent freq. (MHz)	Injected AWGN Level (dBm)	Detection Rate (%)	Regulated Threshold level (dBm)	Adjusted Power (dBm)	Margin (dB)
UNII Band 6	6455	20	6455	-70.71	100	-62	-69.71	7.71
					Result: Stop Transmission			
				-71.71	< 90	-62	-70.71	8.71
					Result: Minimal Operation			
				-72.40	0	-62	-71.4	9.4
					Result: Normal Operation			
	6505	160	6430	-71.10	100	-62	-70.1	8.1
					Result: Stop Transmission			
				-72.10	< 90	-62	-71.1	9.1
					Result: Minimal Operation			
				-72.89	0	-62	-71.89	9.89
					Result: Normal Operation			
			6505	-67.32	100	-62	-66.32	4.32
					Result: Stop Transmission			
				-68.32	< 90	-62	-67.32	5.32
					Result: Minimal Operation			
				-69.18	0	-62	-68.18	6.18
					Result: Normal Operation			
			6580	-70.63	100	-62	-69.63	7.63
					Result: Stop Transmission			
				-71.63	< 90	-62	-70.63	8.63
					Result: Minimal Operation			
				-72.86	0	-62	-71.86	9.86
					Result: Normal Operation			

Note 1: Adjusted Power = Injected AWGN Level - minimum antenna gain (Antenna 6, gain = -1.00dBi)

Note 2: Path Loss between antenna and RF connector is negligible. (0 dB)

Note 3: Margin = Regulated Threshold level - Adjusted Power



Band	Channel Freq. (MHz)	Channel BW (MHz)	Incumbent freq. (MHz)	Injected AWGN Level (dBm)	Detection Rate (%)	Regulated Threshold level (dBm)	Adjusted Power (dBm)	Margin (dB)
UNII Band 7	6695	20	6695	-71.13	100	-62	-70.13	8.13
					Result: Stop Transmission			
				-72.13	< 90	-62	-71.13	9.13
					Result: Minimal Operation			
				-72.85	0	-62	-71.85	9.85
					Result: Normal Operation			
	6665	160	6590	-71.00	100	-62	-70	8
					Result: Stop Transmission			
				-72.00	< 90	-62	-71	9
					Result: Minimal Operation			
				-73.91	0	-62	-72.91	10.91
					Result: Normal Operation			
			6665	-68.34	100	-62	-67.34	5.34
					Result: Stop Transmission			
				-69.34	< 90	-62	-68.34	6.34
					Result: Minimal Operation			
			6740	-70.13	0	-62	-69.13	7.13
					Result: Normal Operation			
				-71.72	100	-62	-70.72	8.72
					Result: Stop Transmission			
				-72.72	< 90	-62	-71.72	9.72
					Result: Minimal Operation			
				-73.80	0	-62	-72.8	10.8
					Result: Normal Operation			

Note 1: Adjusted Power = Injected AWGN Level - minimum antenna gain (Antenna 6, gain = -1.00dBi)

Note 2: Path Loss between antenna and RF connector is negligible. (0 dB)

Note 3: Margin = Regulated Threshold level - Adjusted Power



Band	Channel Freq. (MHz)	Channel BW (MHz)	Incumbent freq. (MHz)	Injected AWGN Level (dBm)	Detection Rate (%)	Regulated Threshold level (dBm)	Adjusted Power (dBm)	Margin (dB)
UNII Band 8	7015	20	7015	-68.40	100	-62	-67.4	5.4
				Result: Stop Transmission				
				-69.40	< 90	-62	-68.4	6.4
				Result: Minimal Operation				
	6985	160	6910	-70.09	0	-62	-69.09	7.09
				Result: Normal Operation				
				-68.16	100	-62	-67.16	5.16
				Result: Stop Transmission				
			6985	-69.16	< 90	-62	-68.16	6.16
				Result: Minimal Operation				
				-70.81	0	-62	-69.81	7.81
				Result: Normal Operation				
			7060	-65.83 (worst)	100	-62	-64.83	2.83
				Result: Stop Transmission				
				-66.83	< 90	-62	-65.83	3.83
				Result: Minimal Operation				
				-67.88	0	-62	-66.88	4.88
				Result: Normal Operation				
			7060	-67.35	100	-62	-66.35	4.35
				Result: Stop Transmission				
				-68.35	< 90	-62	-67.35	5.35
				Result: Minimal Operation				
				-69.57	0	-62	-68.57	6.57
				Result: Normal Operation				

Note 1: Adjusted Power = Injected AWGN Level - minimum antenna gain (Antenna 6, gain = -1.00dBi)

Note 2: Path Loss between antenna and RF connector is negligible. (0 dB)

Note 3: Margin = Regulated Threshold level - Adjusted Power




3.5.7 Worst Case Plots of Contention Based Protocol

Contention Based Protocol Result Plots on U-NII 8 (AWGN Interference)


802.11ax (HE160) / 6985MHz (Middle)

Threshold Level (TL) = -65.83 dBm

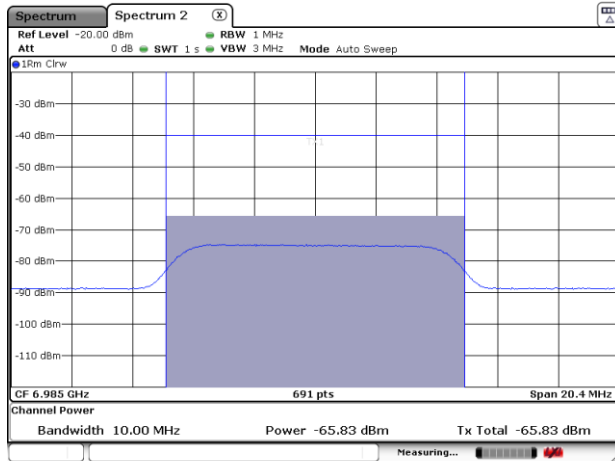


802.11ax (HE160) / CH207 (Middle)

Test result is pass due to no transmission occur.

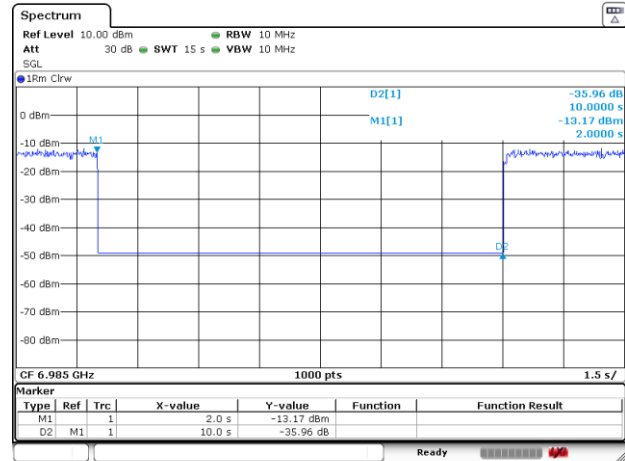


802.11ax (HE160) / 6985MHz (Middle)

Threshold Level (TL) = -66.83 dBm

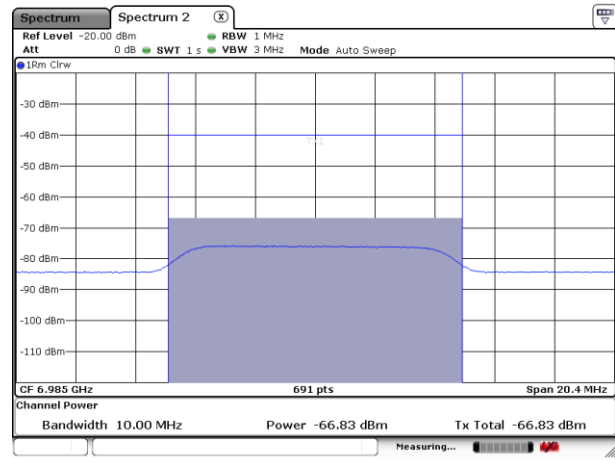

802.11ax (HE160) / CH207 (Middle)

Transmit when the interferer is 1dB lower.

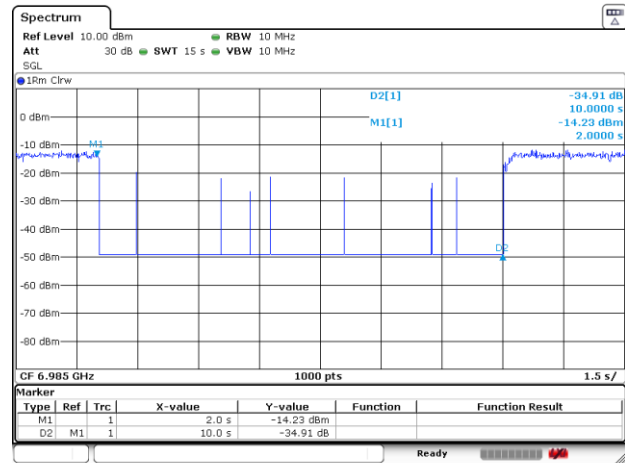


Remark: M1: Injection of AWGN signal, D1: Removal of AWGN signal



3.5.8 Worst Case of Contention Based Protocol Transmission Bandwidth

Verify transmission absence when Incumbent signal at different frequency (frequency domain plots).

1. When Incumbent Signal inject at lowest frequency, the transmission bandwidth reduced to 20MHz;
2. When Incumbent Signal inject at middle frequency, the whole 160MHz bandwidth stop transmission;
3. When Incumbent Signal inject at highest frequency, the transmission bandwidth reduced to 80MHz;
4. This device does not support channel puncturing mode for incumbent avoidance but bandwidth reduction mechanism is supported.

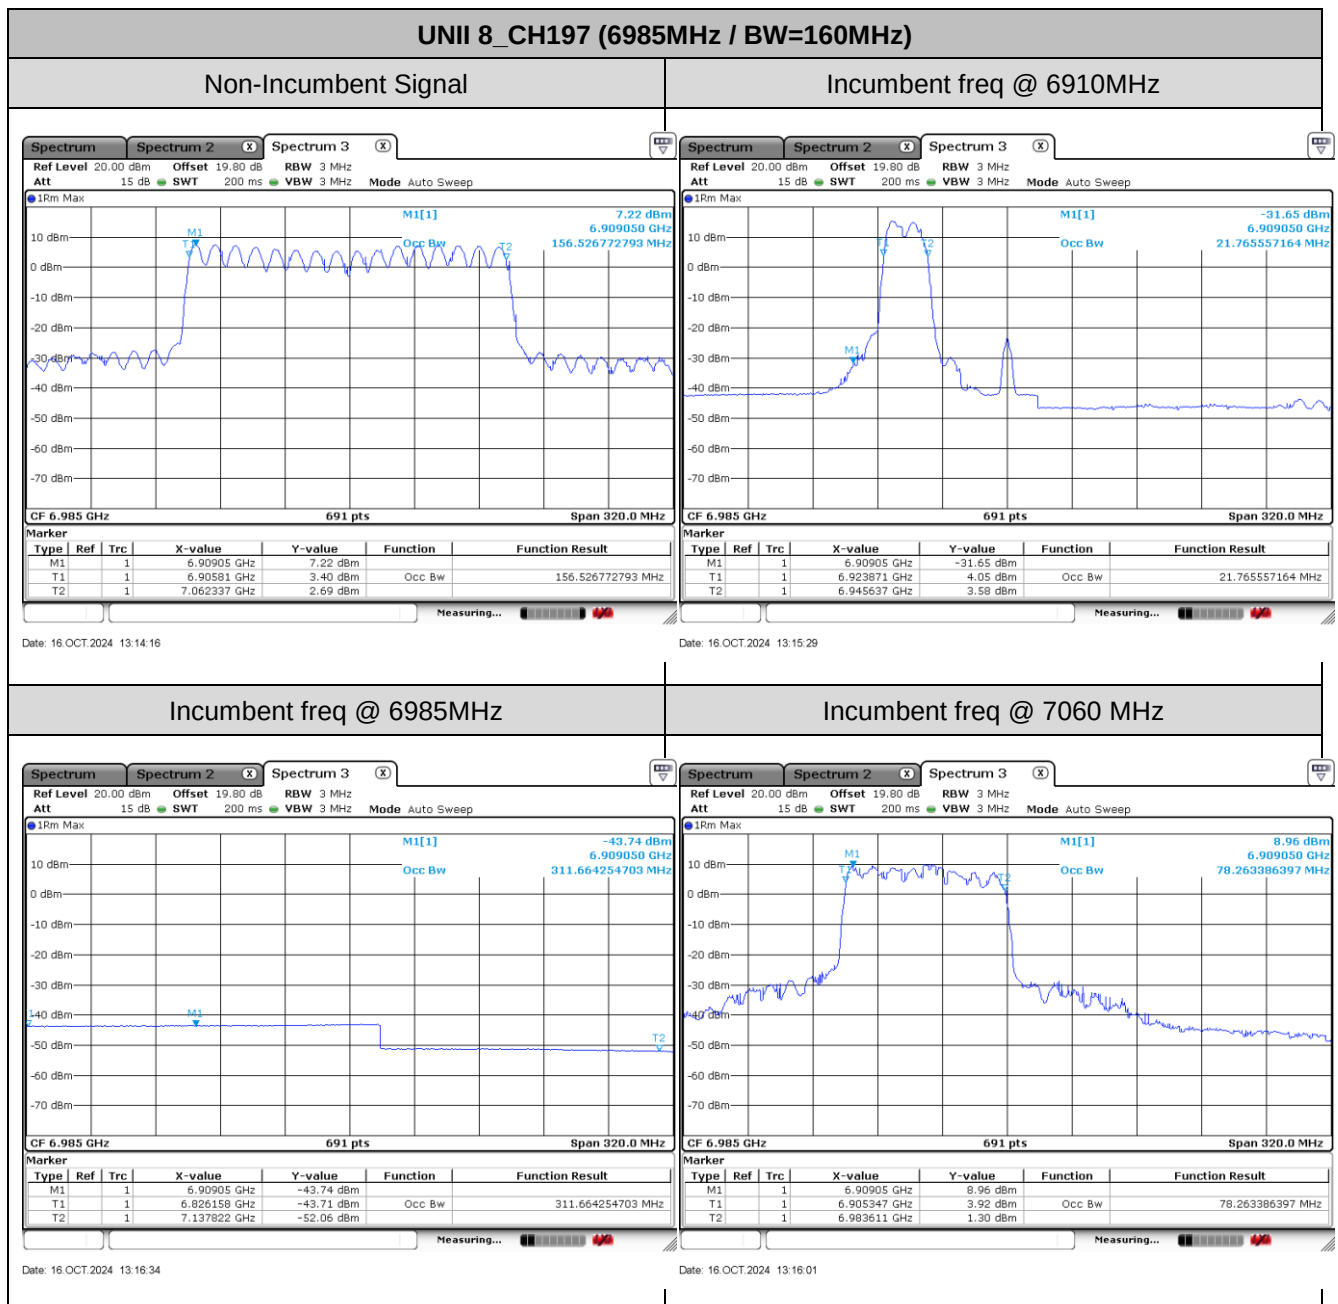

3.6 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.6.1 Limit of Unwanted Emissions

- (1) For transmitters operating within the 5.925-7.125 GHz band: Any emissions outside of the 5.925-7.125 GHz band must not exceed an e.i.r.p. of -27 dBm/MHz.

EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27 (RMS)	68.2
- 7 (Peak)	88.2

Unwanted emissions outside of restricted bands are measured with a RMS detector.

In addition, 15.35(b) applies where the peak emissions must be limited to no more than 20 dB above the average limit

- (2) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note: The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

3.6.2 Measuring Instruments


See list of measuring equipment of this test report.

3.6.3 Test Procedures


1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Section G) Unwanted emissions measurement.
(1) Procedure for Unwanted Emissions Measurements Below 1000MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold
(2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW $\geq$ 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold
(3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.6.4 Test Setup


For radiated emissions below 30MHz

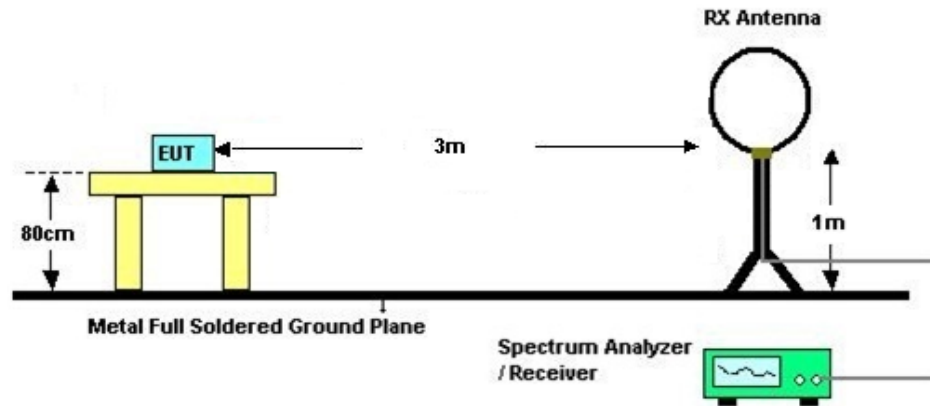

For radiated emissions from 30MHz to 1GHz

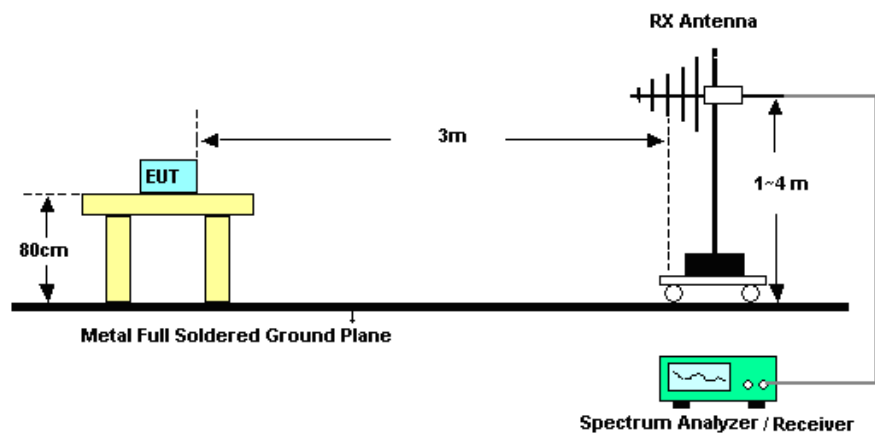

For radiated emissions above 1GHz

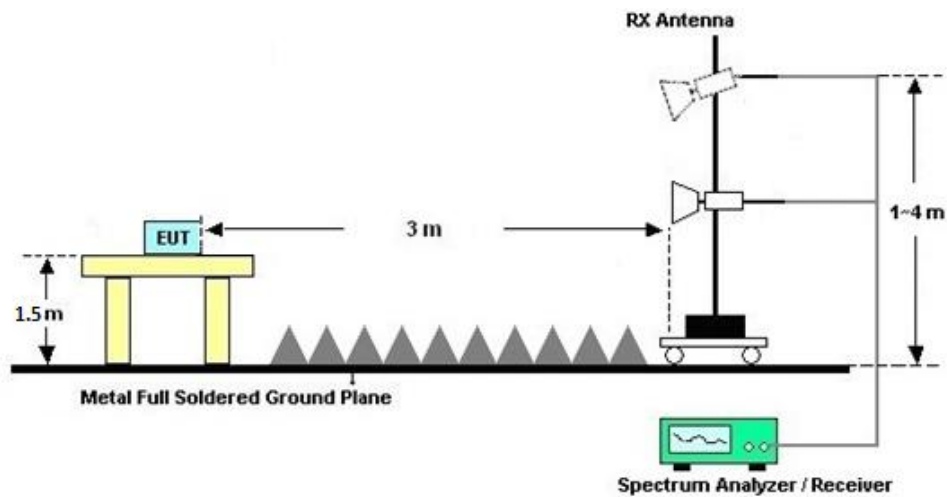



3.6.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

3.6.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C

3.6.7 Duty Cycle

Please refer to Appendix D.

3.6.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)

Please refer to Appendix C.

The emission level above 18GHz is checked that the emission level is noise floor only, so it is not reflected in the report.

3.7 AC Conducted Emission Measurement

3.7.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.7.2 Measuring Instruments

See list of measuring equipment of this test report.

3.7.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.7.4 Test Setup

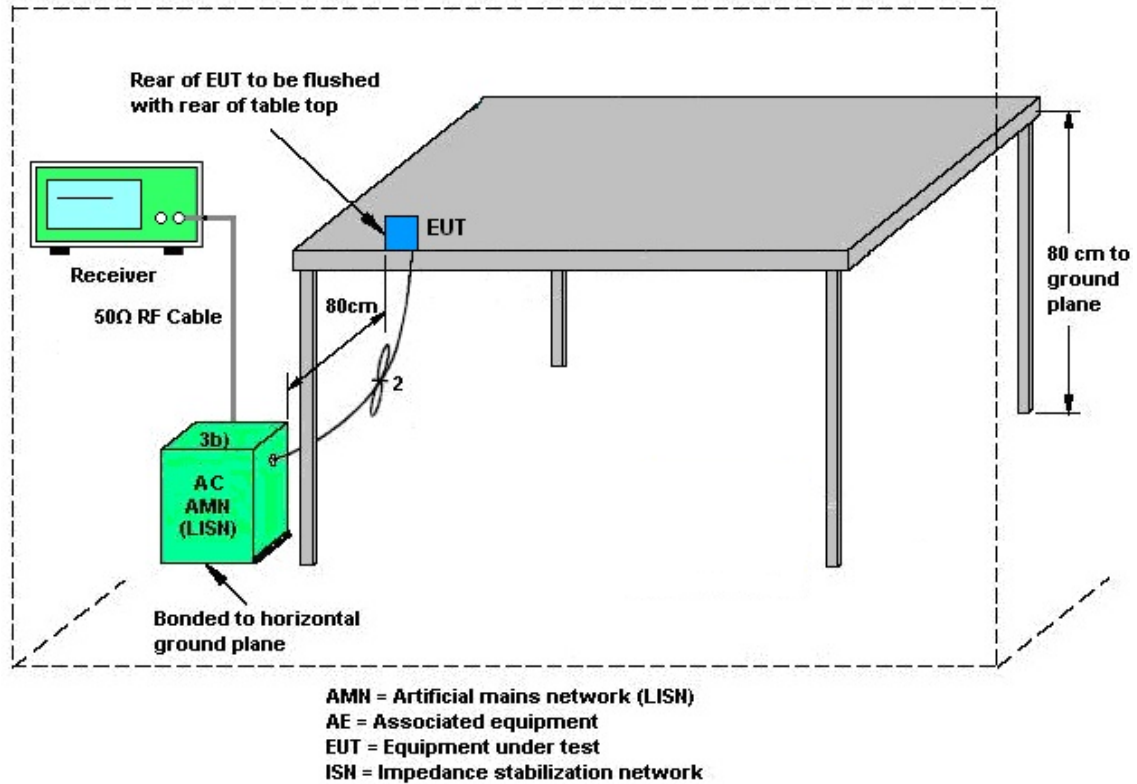

3.7.5 Test Result of AC Conducted Emission

Please refer to Appendix B.

3.8 Antenna Requirements

3.8.1 Standard Applicable

§15.203: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.8.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used. The EUT complies with the requirement of 15.203.

3.8.3 Antenna Gain

<CDD Modes >

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For CDD transmissions, directional gain is calculated as

For power, the directional gain G_{ANT} is set equal to the antenna having the highest gain, i.e.,

Directional gain = $G_{ANT\ MAX}(Ant.1\ Gain, Ant.2\ Gain, \dots) + \text{Array Gain}$, as following table for Power, where Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

For PSD, the directional gain calculation is following,

Directional gain = $10 \log[(10^{G_1/10} + 10^{G_2/10} + \dots + 10^{G_n/10})^2 / N_{ANT}]$ dBi, as following table for PSD.

N_{ANT} = number of transmit antennas

N_{SS} = number of spatial streams. (The worst case directional gain will occur when $N_{SS} = 1$)

<CDD Modes>				
			DG for Power (dBi)	DG for PSD (dBi)
	Ant. 6 (dBi)	Ant. 7 (dBi)		
U-NII-5	2.70	3.00	3.00	5.86
U-NII-6	0.40	3.10	3.10	4.86
U-NII-7	0.60	2.00	2.00	4.34
U-NII-8	-1.00	2.80	2.80	4.12

TXBF modes

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For transmissions, directional gain is calculated as

$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

where

Each antenna is driven by no more than one spatial stream;

N_{SS} = the number of independent spatial streams of data;

N_{ANT} = the total number of antennas

$g_{j,k} = 10^{G_k / 20}$ if the k th antenna is being fed by spatial stream j , or zero if it is not;
 G_k is the gain in dBi of the k th antenna.

The EUT supports beamforming for 802.11ac modes.

The directional gain calculation is following F)2)e)ii) of KDB 662911 D01 v02r01.

The directional gain "DG" is calculated as following table.

	Ant. 6	Ant. 7	for	for
	(dBi)	(dBi)	Power	PSD
	(dBi)	(dBi)	(dBi)	(dBi)
U-NII-5	2.70	3.00	5.86	5.86
U-NII-6	0.40	3.10	4.86	4.86
U-NII-7	0.60	2.00	4.34	4.34
U-NII-8	-1.00	2.80	4.12	4.12



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 11, 2023	Sep. 26, 2024~ Oct. 09, 2024	Oct. 10, 2024	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 02, 2024	Sep. 26, 2024~ Oct. 09, 2024	Jan. 01, 2025	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 02, 2024	Sep. 26, 2024~ Oct. 09, 2024	Jan. 01, 2025	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY56400023	3Hz~8.5GHz; Max 30dBm	Jan. 02, 2024	Oct. 20, 2024	Jan. 01, 2025	Radiation (03CH06-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY57471084	10Hz~44GHz	Jul. 04, 2024	Oct. 20, 2024	Jul. 03, 2025	Radiation (03CH06-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 08, 2024	Oct. 20, 2024	Sep. 07, 2025	Radiation (03CH06-KS)
Bilog Antenna	TeseQ	CBL6111D	59913	30MHz~1GHz	Sep. 03, 2024	Oct. 20, 2024	Sep. 02, 2025	Radiation (03CH06-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218652	1GHz~18GHz	Apr. 11, 2024	Oct. 20, 2024	Apr. 10, 2025	Radiation (03CH06-KS)
SHF-EHF Horn	Com-power	AH-840	101093	18GHz~40GHz	Jan. 06, 2024	Oct. 20, 2024	Jan. 05, 2025	Radiation (03CH06-KS)
Amplifier	SONOMA	310N	372171	9KHz ~1GHZ	Jan. 02, 2024	Oct. 20, 2024	Jan. 01, 2025	Radiation (03CH06-KS)
Amplifier	EM	EM18G40GA	060728	18~40GHz	Jan. 02, 2024	Oct. 20, 2024	Jan. 01, 2025	Radiation (03CH06-KS)
high gain Amplifier	MITEQ	AMF-7D-0010 1800-30-10P	2082395	1Ghz-18Ghz	Jan. 02, 2024	Oct. 20, 2024	Jan. 01, 2025	Radiation (03CH06-KS)
Amplifier	Keysight	83017A	MY57280119	500MHz~26.5GHz	Oct. 09, 2024	Oct. 20, 2024	Oct. 08, 2025	Radiation (03CH06-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Oct. 20, 2024	NCR	Radiation (03CH06-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Oct. 20, 2024	NCR	Radiation (03CH06-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Oct. 20, 2024	NCR	Radiation (03CH06-KS)
EMI Receiver	R&S	ESC17	100768	9kHz~7GHz;	Apr. 18, 2024	Oct. 15, 2024	Apr. 17, 2025	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Aug. 20, 2024	Oct. 15, 2024	Aug. 19, 2025	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Apr. 18, 2024	Oct. 15, 2024	Apr. 17, 2025	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000811	AC 0V~300V, 45Hz~1000Hz	Oct. 09, 2024	Oct. 15, 2024	Oct. 08, 2025	Conduction (CO01-KS)
Signal Analyzer	R&S	FSV7	101472	10Hz~7GHz	Jan. 02, 2024	Oct. 16, 2024	Jan. 01, 2025	Conducted (DFS01-KS)
MXG-B RF Vector Signal Generator	Keysight	5182B /5182BX07	MY56200417 /MY59360210	9kHz~7.2GHz	Apr. 17, 2024	Oct. 16, 2024	Apr. 16, 2025	Conducted (DFS01-KS)
Combiner	MTJ Cooperation	MTJ7112	N/A	0.4-6GHz	NCR	Oct. 16, 2024	NCR	Conducted (DFS01-KS)

NCR: No Calibration Required



5 Measurement Uncertainty

Uncertainty of Conducted Measurement

Conducted Spurious Emission & Bandedge	±2.22 dB
Occupied Channel Bandwidth	±0.1%
Conducted Power	±0.50 dB
Conducted Power Spectral Density	±0.90 dB
Frequency	±0.04 ppm
Conducted Generated signal Levels	±0.56 dB
Conducted Time	0.54%

Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.84dB
---	--------

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.30dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	6.06dB
---	--------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.18dB
---	--------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.38dB
---	--------

----- THE END -----



Appendix A. Conducted Test Results



Ambient Condition: 25 °C, 45 %RH

Test Date: 2024.9.26~2024.10.9

Test Engineer: Jiang Jun

Emission Bandwidth

Test Result

TestMode	Antenna	Freq(MHz)	26dB EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A-CDD	Ant6	5955	18.63	5945.64	5964.27	320	PASS
	Ant7	5955	18.87	5945.59	5964.46	320	PASS
	Ant6	6175	19.06	6165.45	6184.50	320	PASS
	Ant7	6175	18.72	6165.69	6184.41	320	PASS
	Ant6	6415	18.82	6405.54	6424.36	320	PASS
	Ant7	6415	18.91	6405.64	6424.55	320	PASS
	Ant6	6435	18.72	6425.59	6444.31	320	PASS
	Ant7	6435	18.82	6425.64	6444.46	320	PASS
	Ant6	6475	18.77	6465.54	6484.31	320	PASS
	Ant7	6475	18.87	6465.59	6484.46	320	PASS
	Ant6	6515	18.77	6505.54	6524.31	320	PASS
	Ant7	6515	19.01	6505.40	6524.41	320	PASS
	Ant6	6535	18.87	6525.54	6544.41	320	PASS
	Ant7	6535	18.82	6525.64	6544.46	320	PASS
	Ant6	6695	18.72	6685.54	6704.27	320	PASS
	Ant7	6695	18.72	6685.73	6704.46	320	PASS
	Ant6	6855	18.68	6845.73	6864.41	320	PASS
	Ant7	6855	18.82	6845.64	6864.46	320	PASS
	Ant6	6875	18.72	6865.54	6884.27	320	PASS
	Ant7	6875	19.29	6865.21	6884.50	320	PASS
	Ant6	6895	18.48	6885.73	6904.22	320	PASS
	Ant7	6895	18.72	6885.69	6904.41	320	PASS
	Ant6	6995	18.96	6985.78	7004.74	320	PASS
	Ant7	6995	18.96	6985.64	7004.60	320	PASS
	Ant6	7095	18.77	7085.50	7104.27	320	PASS
	Ant7	7095	18.91	7085.64	7104.55	320	PASS
11AX20MIMO	Ant6	5955	20.77	5944.54	5965.31	320	PASS
	Ant7	5955	20.58	5944.69	5965.27	320	PASS
	Ant6	6175	20.72	6164.69	6185.41	320	PASS
	Ant7	6175	20.44	6164.88	6185.31	320	PASS
	Ant6	6415	20.63	6404.78	6425.41	320	PASS
	Ant7	6415	20.87	6404.69	6425.55	320	PASS
	Ant6	6435	20.58	6424.83	6445.41	320	PASS
	Ant7	6435	20.49	6424.69	6445.17	320	PASS
	Ant6	6475	20.58	6464.73	6485.31	320	PASS
	Ant7	6475	20.63	6464.88	6485.51	320	PASS
	Ant6	6515	20.77	6504.69	6525.46	320	PASS
	Ant7	6515	20.58	6504.69	6525.27	320	PASS
	Ant6	6535	20.96	6524.49	6545.46	320	PASS
	Ant7	6535	20.44	6524.83	6545.27	320	PASS
	Ant6	6695	20.82	6684.59	6705.41	320	PASS




	Ant7	6695	20.49	6684.78	6705.27	320	PASS
	Ant6	6855	20.44	6844.83	6865.27	320	PASS
	Ant7	6855	20.20	6844.97	6865.17	320	PASS
	Ant6	6875	20.53	6864.78	6885.31	320	PASS
	Ant7	6875	20.68	6864.73	6885.41	320	PASS
	Ant6	6895	20.77	6884.64	6905.41	320	PASS
	Ant7	6895	20.63	6884.59	6905.22	320	PASS
	Ant6	6995	20.91	6984.59	7005.51	320	PASS
	Ant7	6995	20.87	6984.59	7005.46	320	PASS
	Ant6	7095	20.68	7084.78	7105.46	320	PASS
11AX40MIMO	Ant7	7095	20.58	7084.78	7105.36	320	PASS
	Ant6	5965	40.30	5944.94	5985.25	320	PASS
	Ant7	5965	40.02	5945.04	5985.06	320	PASS
	Ant6	6165	40.11	6145.13	6185.25	320	PASS
	Ant7	6165	40.30	6144.94	6185.25	320	PASS
	Ant6	6405	40.21	6384.85	6425.06	320	PASS
	Ant7	6405	40.59	6384.75	6425.34	320	PASS
	Ant6	6445	40.40	6424.85	6465.25	320	PASS
	Ant7	6445	40.40	6424.75	6465.15	320	PASS
	Ant6	6485	40.11	6464.94	6505.06	320	PASS
	Ant7	6485	40.21	6464.94	6505.15	320	PASS
	Ant6	6525	40.11	6504.94	6545.06	320	PASS
	Ant7	6525	40.21	6504.85	6545.06	320	PASS
	Ant6	6565	40.11	6545.04	6585.15	320	PASS
	Ant7	6565	40.11	6544.94	6585.06	320	PASS
	Ant6	6685	40.21	6665.04	6705.25	320	PASS
	Ant7	6685	40.78	6664.56	6705.34	320	PASS
	Ant6	6845	40.21	6824.94	6865.15	320	PASS
	Ant7	6845	40.40	6824.75	6865.15	320	PASS
	Ant6	6885	40.02	6865.04	6905.06	320	PASS
	Ant7	6885	40.30	6864.94	6905.25	320	PASS
	Ant6	6925	40.40	6904.75	6945.15	320	PASS
	Ant7	6925	39.92	6904.94	6944.87	320	PASS
	Ant6	6965	40.02	6945.04	6985.06	320	PASS
	Ant7	6965	40.21	6944.85	6985.06	320	PASS
	Ant6	7085	39.83	7065.04	7104.87	320	PASS
	Ant7	7085	40.02	7065.04	7105.06	320	PASS
11AX80MIMO	Ant6	5985	81.37	5944.50	6025.88	320	PASS
	Ant7	5985	81.56	5944.12	6025.69	320	PASS
	Ant6	6145	81.75	6104.31	6186.07	320	PASS
	Ant7	6145	81.75	6104.31	6186.07	320	PASS
	Ant6	6385	81.56	6344.12	6425.69	320	PASS
	Ant7	6385	81.37	6344.31	6425.69	320	PASS
	Ant6	6465	81.56	6424.12	6505.69	320	PASS
	Ant7	6465	81.56	6424.31	6505.88	320	PASS
	Ant6	6545	81.37	6504.12	6585.50	320	PASS
	Ant7	6545	81.37	6504.31	6585.69	320	PASS
	Ant6	6625	80.99	6584.50	6665.50	320	PASS
	Ant7	6625	81.94	6584.12	6666.07	320	PASS
	Ant6	6705	81.37	6664.31	6745.69	320	PASS



	Ant7	6705	82.13	6663.55	6745.69	320	PASS
	Ant6	6785	81.18	6744.70	6825.88	320	PASS
	Ant7	6785	81.37	6744.50	6825.88	320	PASS
	Ant6	6865	81.37	6824.31	6905.69	320	PASS
	Ant7	6865	81.56	6824.12	6905.69	320	PASS
	Ant6	6945	81.37	6904.12	6985.50	320	PASS
	Ant7	6945	80.61	6904.89	6985.50	320	PASS
	Ant6	7025	81.56	6984.50	7066.07	320	PASS
	Ant7	7025	80.80	6984.89	7065.69	320	PASS
11AX160MIMO	Ant6	6025	164.65	5942.48	6107.13	320	PASS
	Ant7	6025	164.27	5942.87	6107.13	320	PASS
	Ant6	6185	165.03	6102.87	6267.90	320	PASS
	Ant7	6185	163.89	6102.87	6266.75	320	PASS
	Ant6	6345	163.89	6262.87	6426.75	320	PASS
	Ant7	6345	165.41	6262.48	6427.90	320	PASS
	Ant6	6505	165.03	6422.87	6587.90	320	PASS
	Ant7	6505	165.41	6421.72	6587.13	320	PASS
	Ant6	6665	163.13	6583.25	6746.37	320	PASS
	Ant7	6665	164.27	6583.25	6747.52	320	PASS
	Ant6	6825	164.27	6742.87	6907.13	320	PASS
	Ant7	6825	163.13	6743.63	6906.75	320	PASS
	Ant6	6985	165.41	6902.87	7068.28	320	PASS
	Ant7	6985	163.51	6903.25	7066.75	320	PASS




Test Graphs

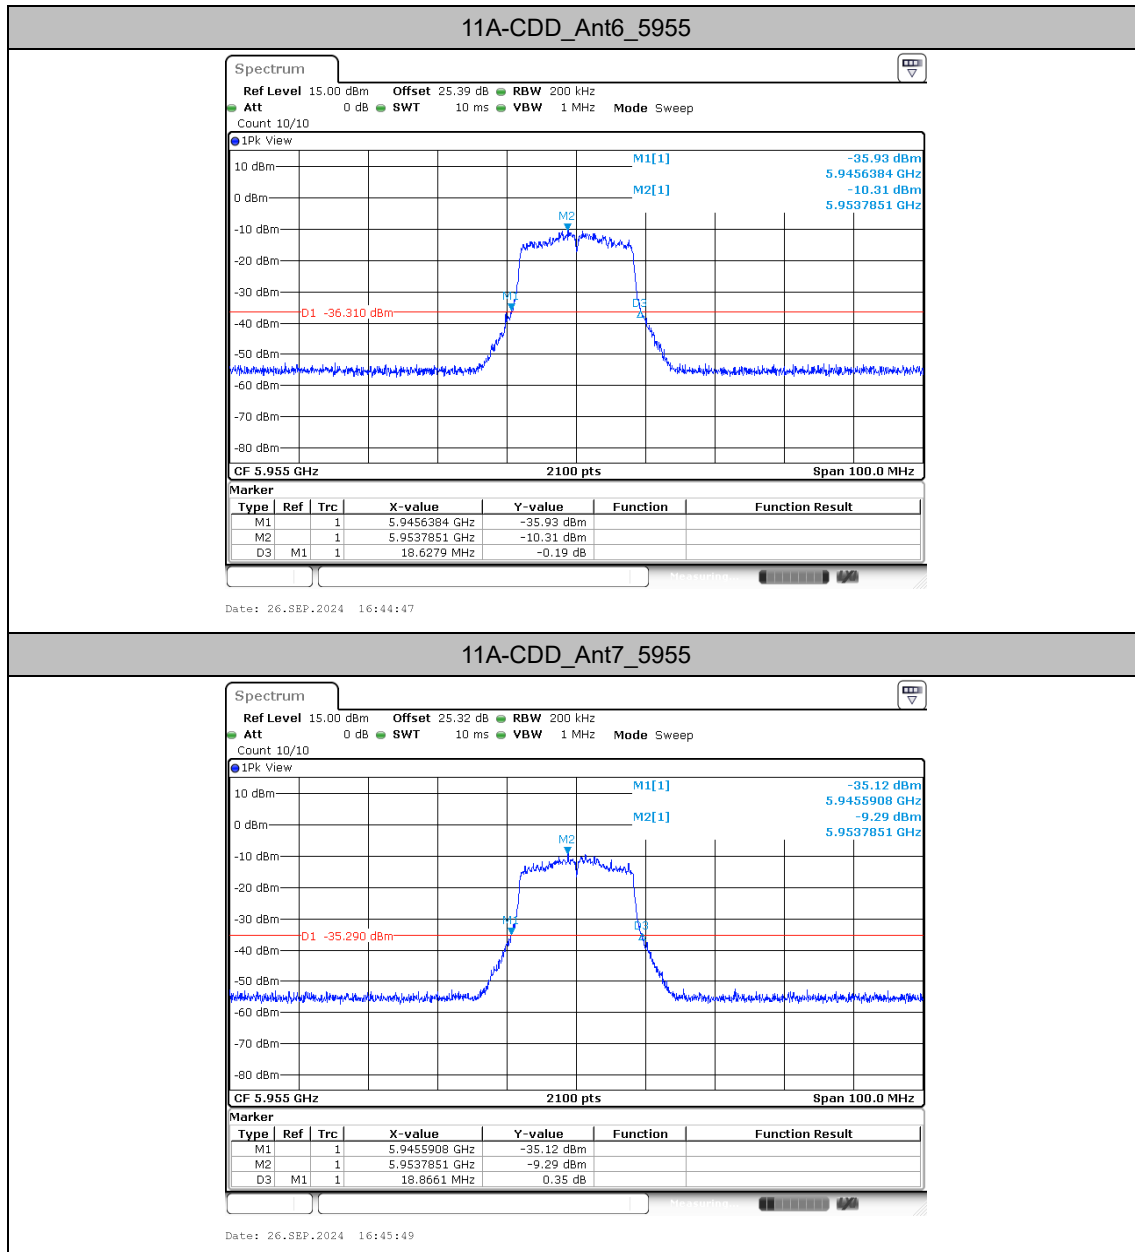




11A-CDD_Ant6_6175

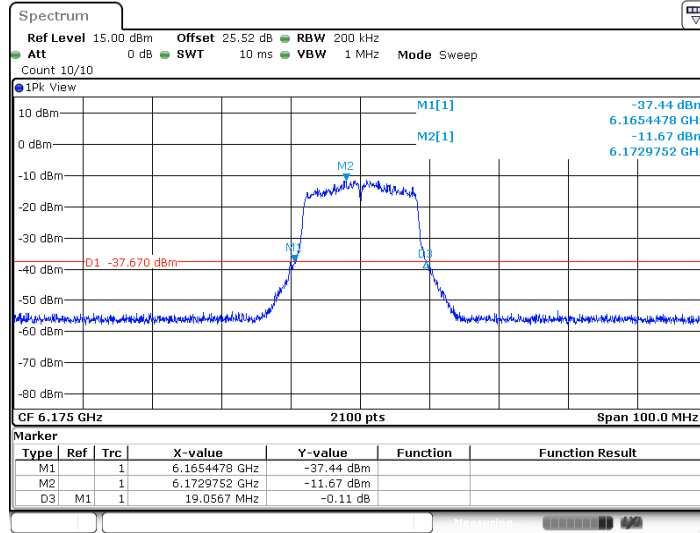

Date: 26.SEP.2024 16:50:26


11A-CDD_Ant7_6175

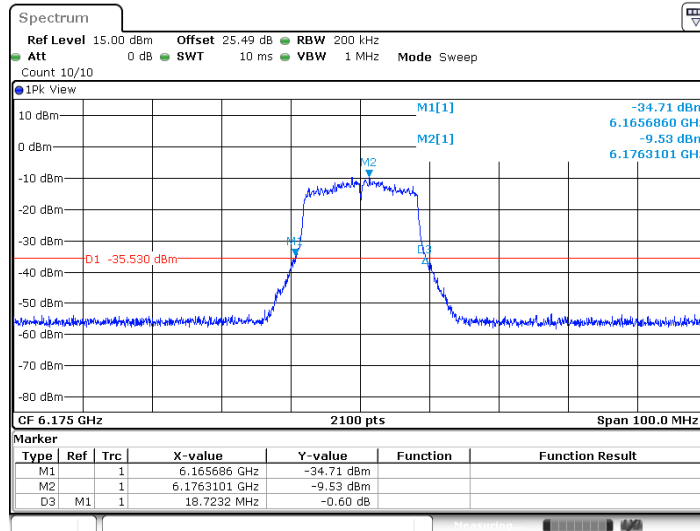

Date: 26.SEP.2024 16:51:32




11A-CDD_Ant6_6415

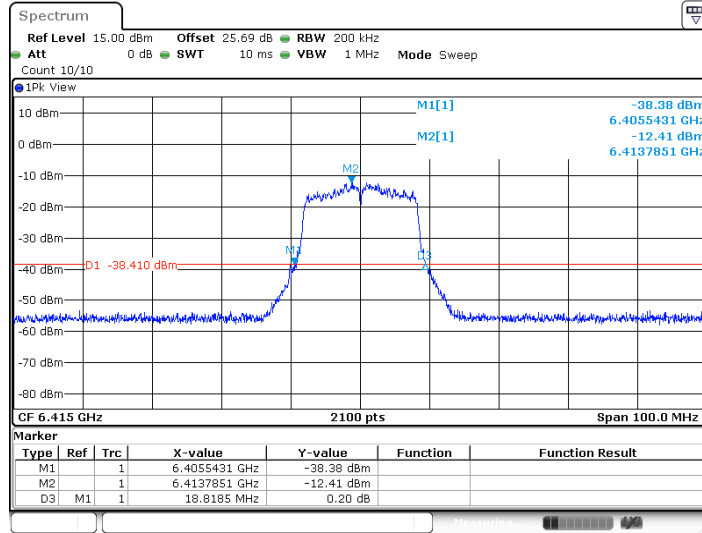

Date: 26.SEP.2024 16:53:27


11A-CDD_Ant7_6415

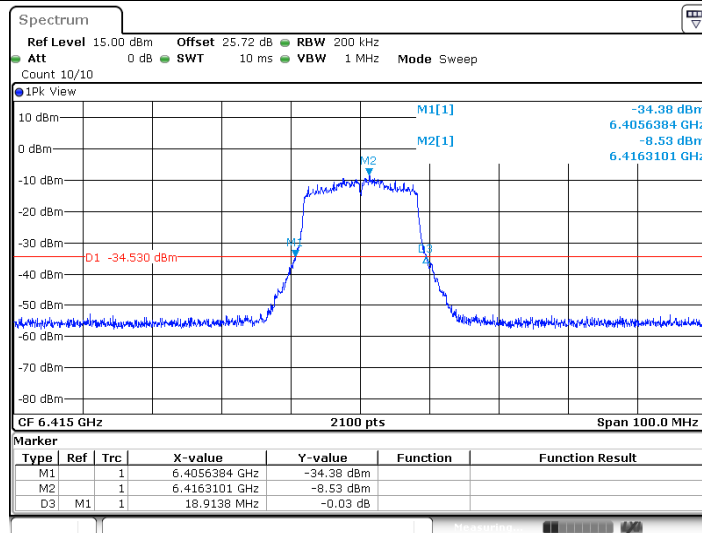


Date: 26.SEP.2024 16:55:59



11A-CDD_Ant6_6435

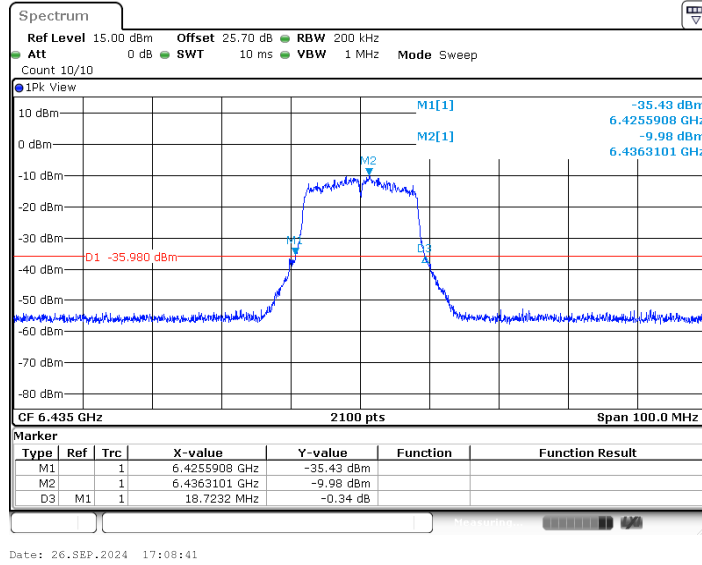


11A-CDD_Ant7_6435

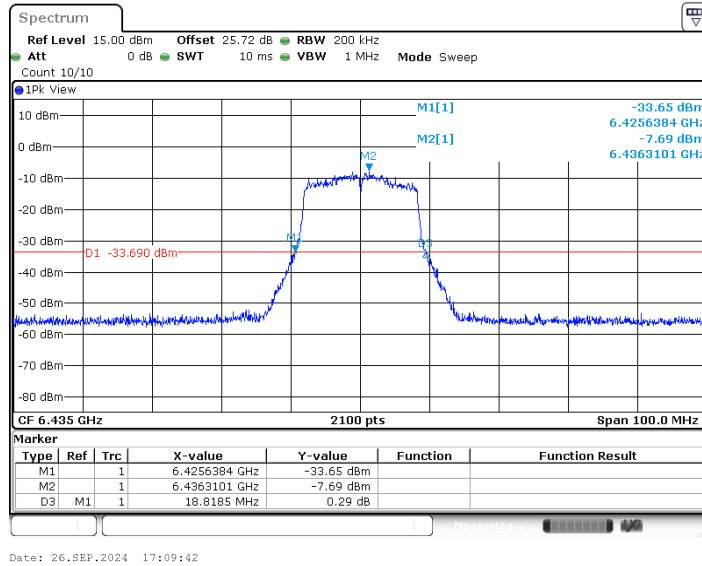




11A-CDD_Ant6_6475

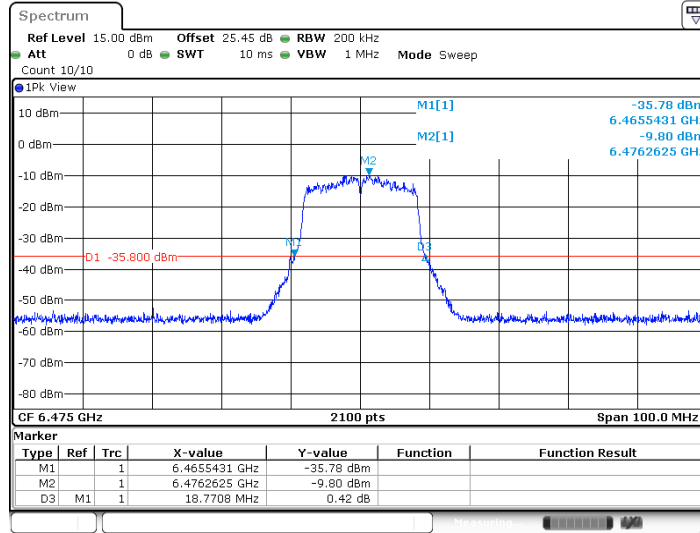

Date: 26.SEP.2024 17:13:35


11A-CDD_Ant7_6475

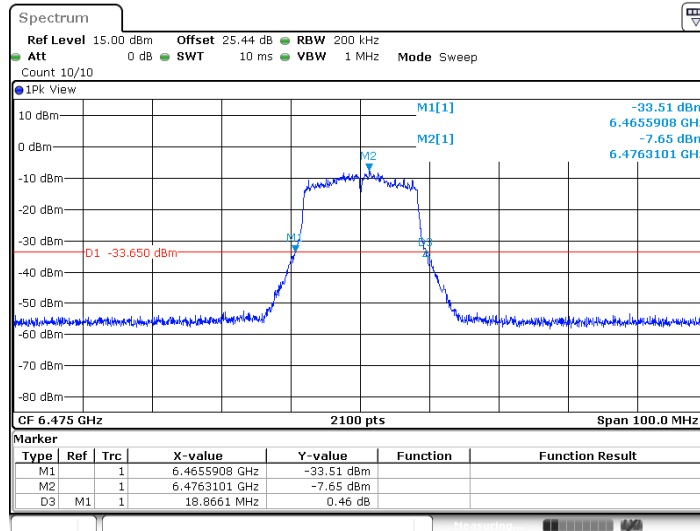

Date: 26.SEP.2024 17:14:20




11A-CDD_Ant6_6515

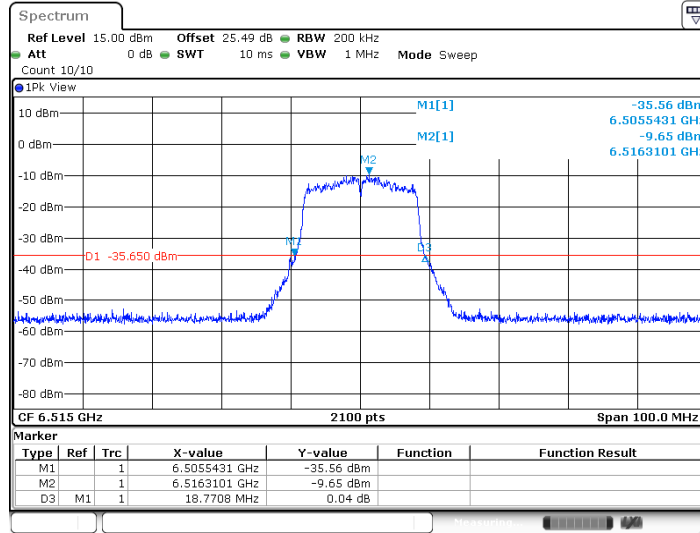

Date: 26.SEP.2024 17:18:54


11A-CDD_Ant7_6515

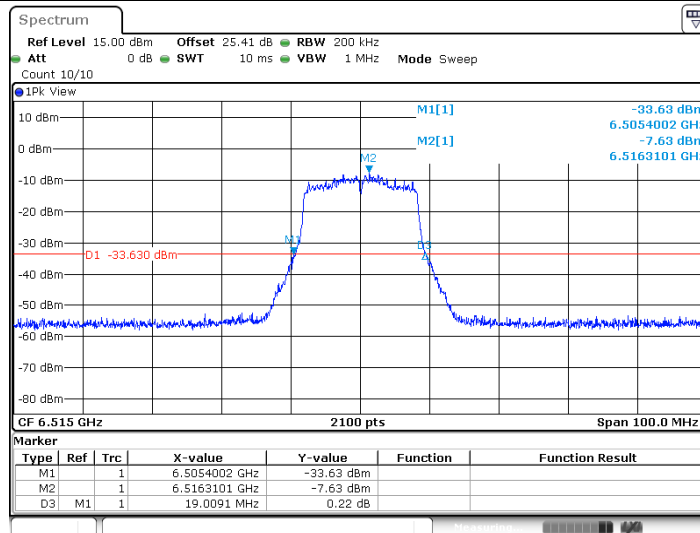

Date: 26.SEP.2024 17:19:39




11A-CDD_Ant6_6535

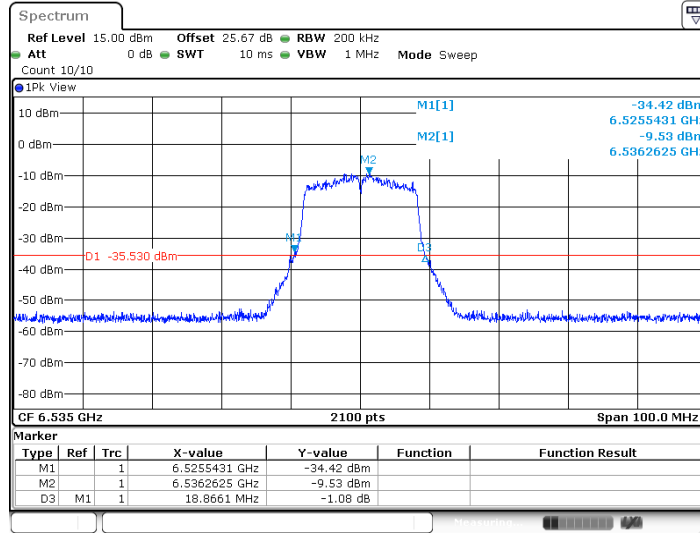

Date: 26.SEP.2024 17:21:20


11A-CDD_Ant7_6535

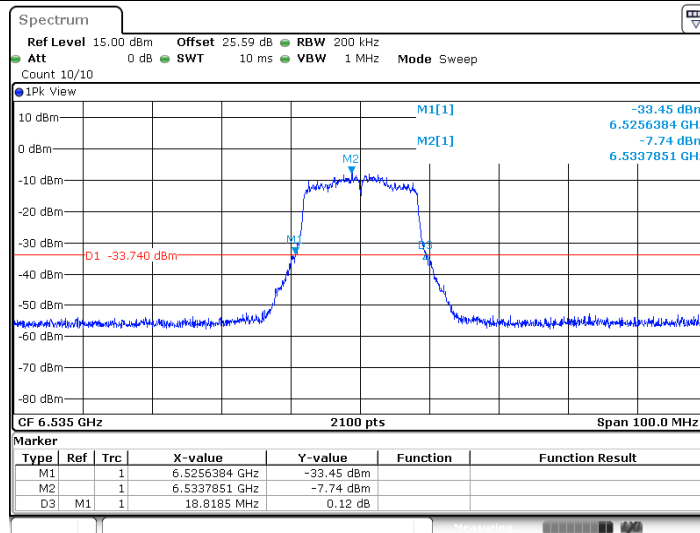

Date: 26.SEP.2024 17:22:09




11A-CDD_Ant6_6695

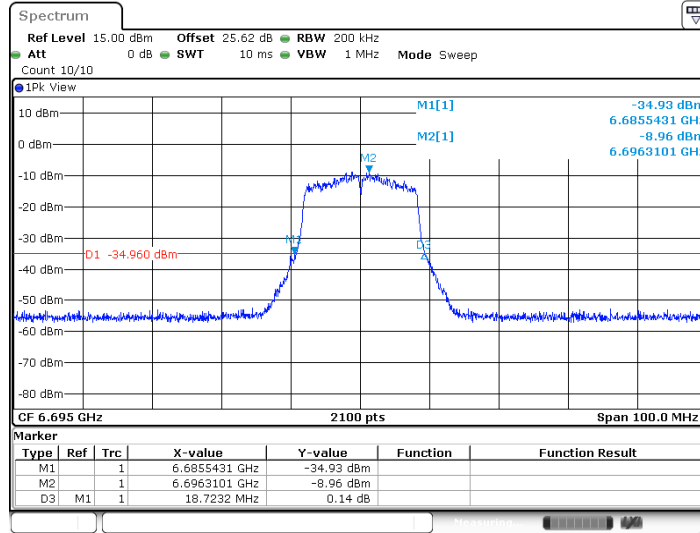

Date: 26.SEP.2024 17:24:32


11A-CDD_Ant7_6695

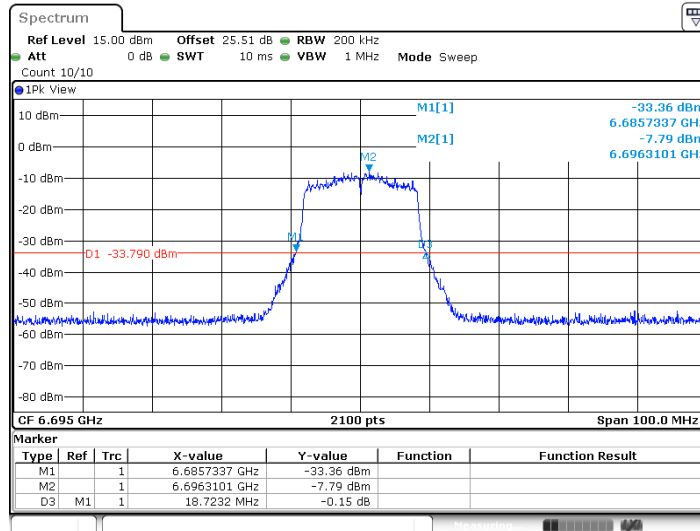


Date: 26.SEP.2024 17:25:33



11A-CDD_Ant6_6855

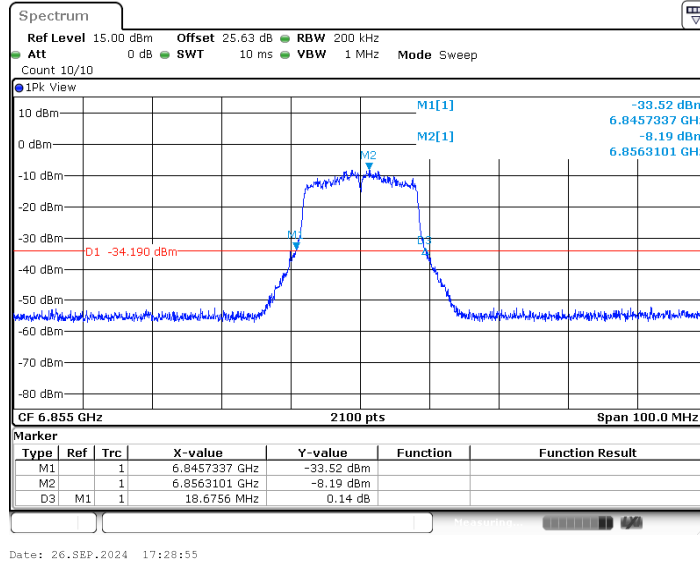


11A-CDD_Ant7_6855

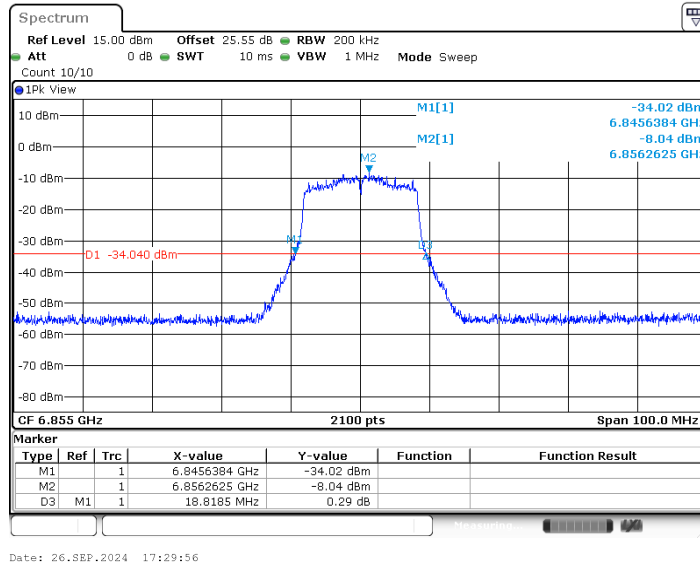




11A-CDD_Ant6_6875

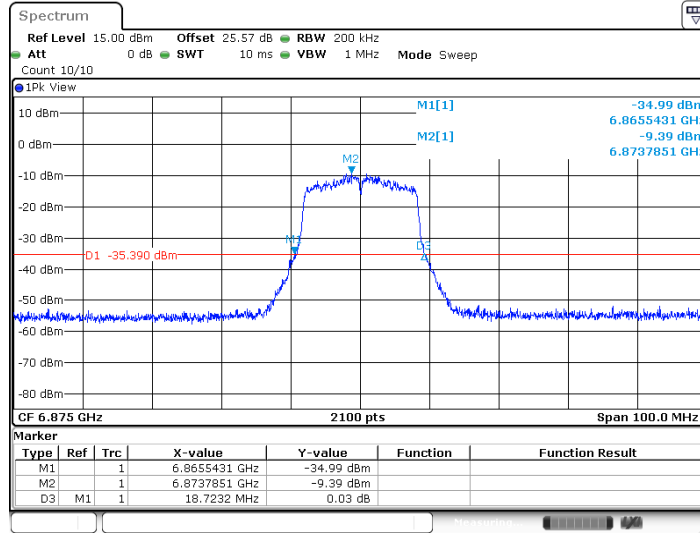

Date: 26.SEP.2024 17:32:21


11A-CDD_Ant7_6875

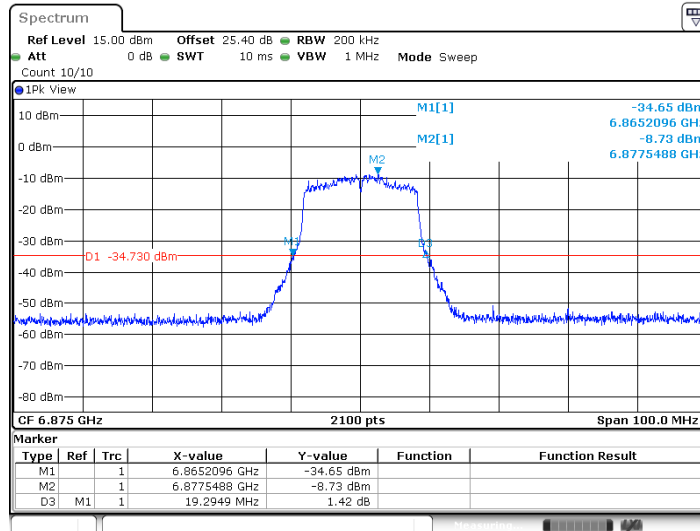


Date: 26.SEP.2024 17:33:22



11A-CDD_Ant6_6895

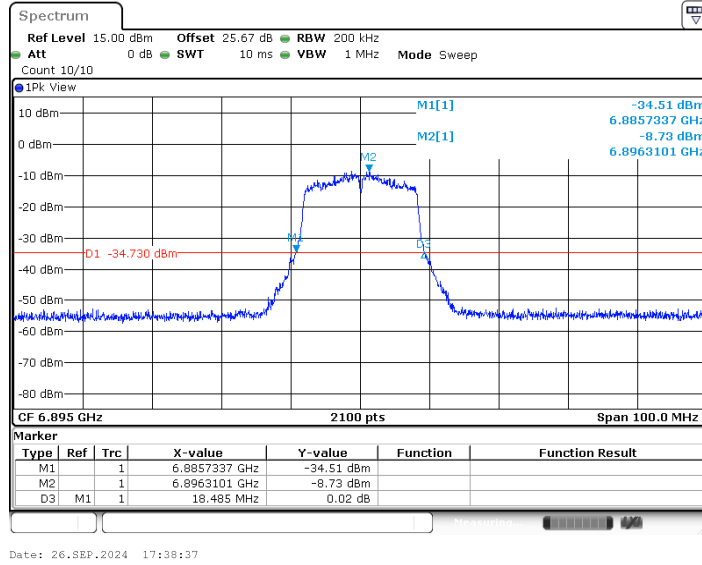


11A-CDD_Ant7_6895

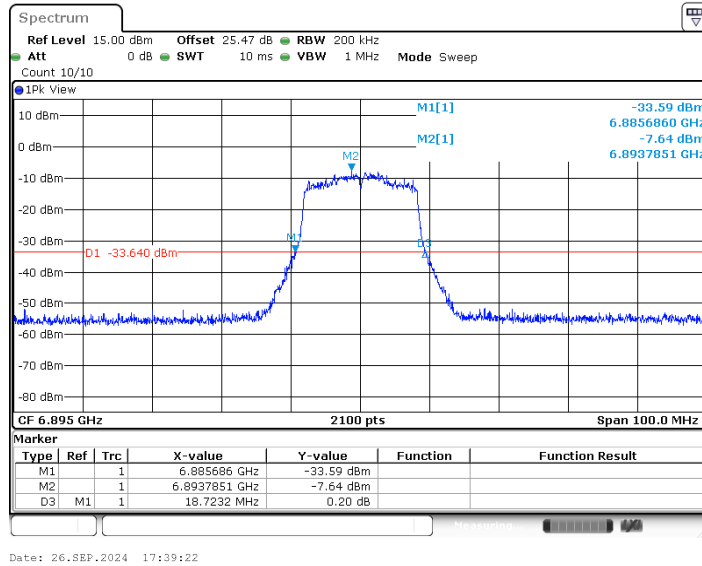




11A-CDD_Ant6_6995

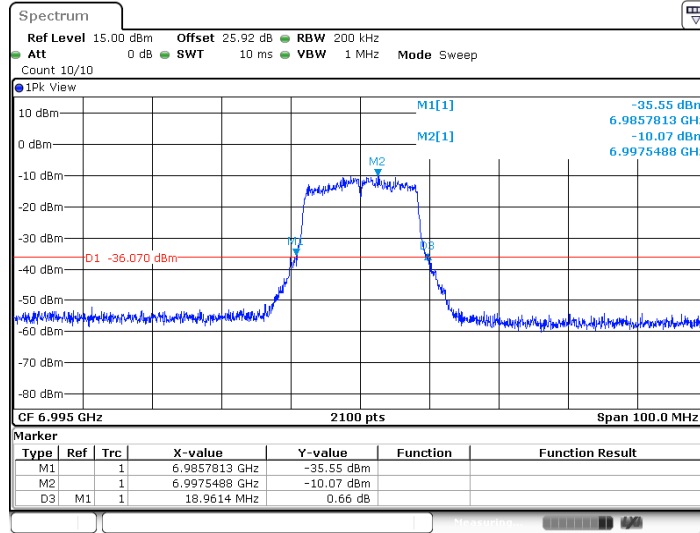


Date: 26.SEP.2024 17:41:15

11A-CDD_Ant7_6995

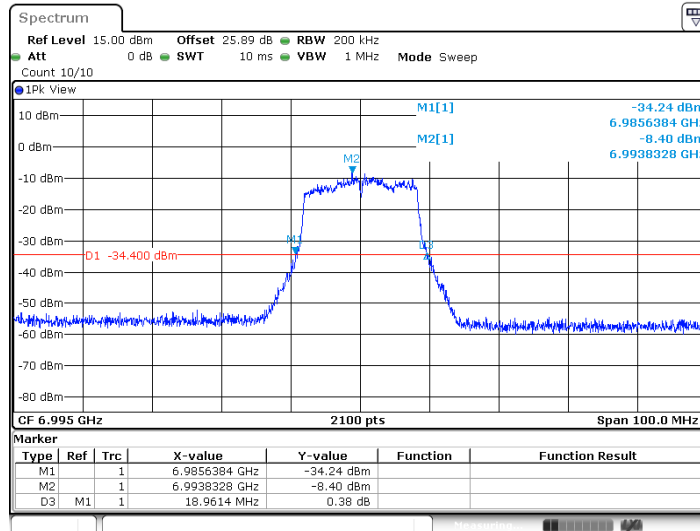


Date: 26.SEP.2024 17:42:14

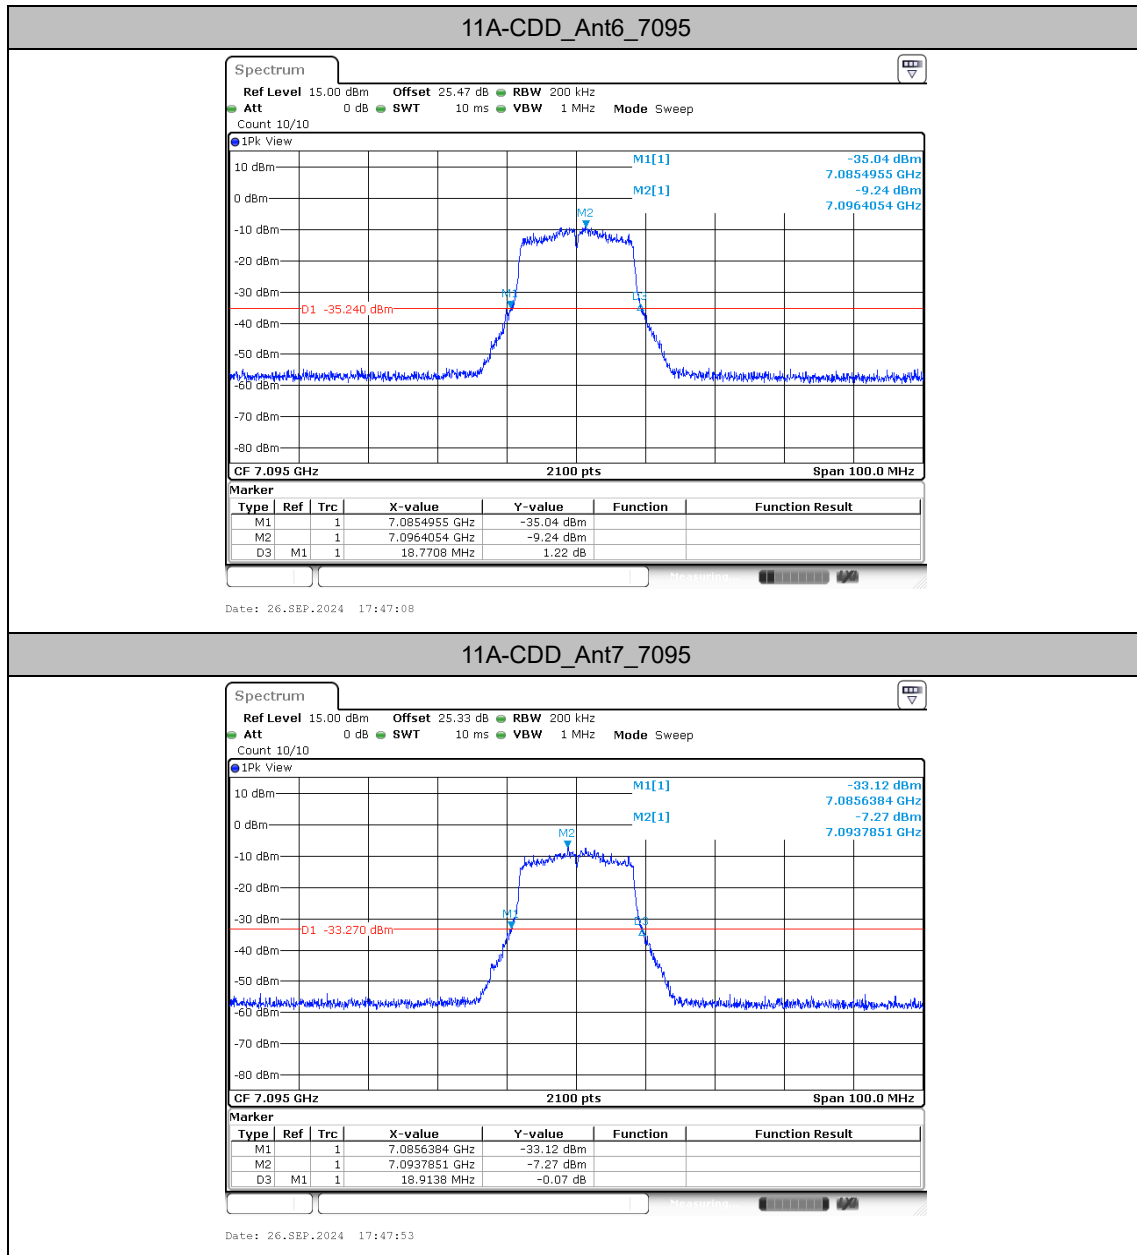




11AX20MIMO_Ant6_5955

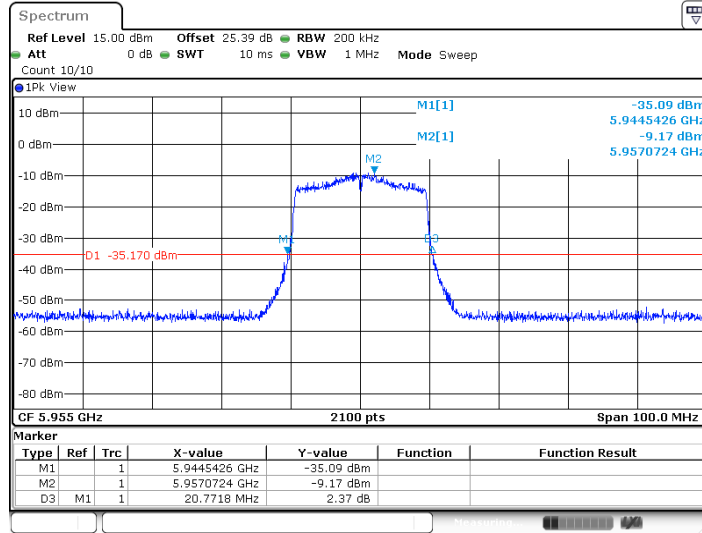

Date: 26.SEP.2024 19:25:46


11AX20MIMO_Ant7_5955

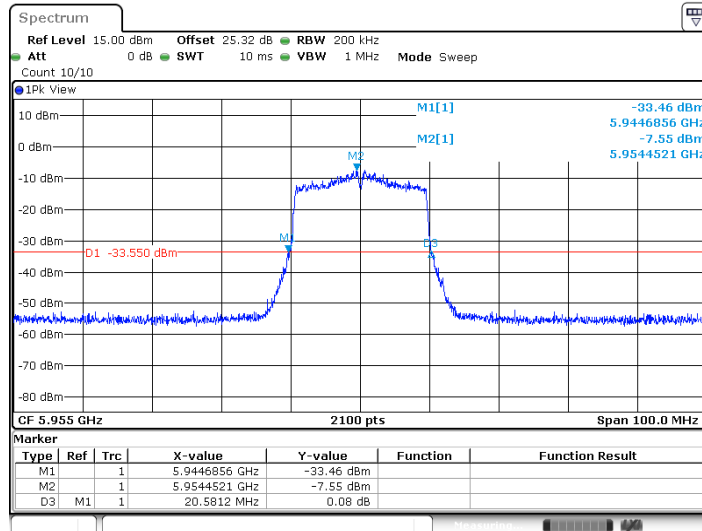

Date: 26.SEP.2024 19:26:31




11AX20MIMO_Ant6_6175

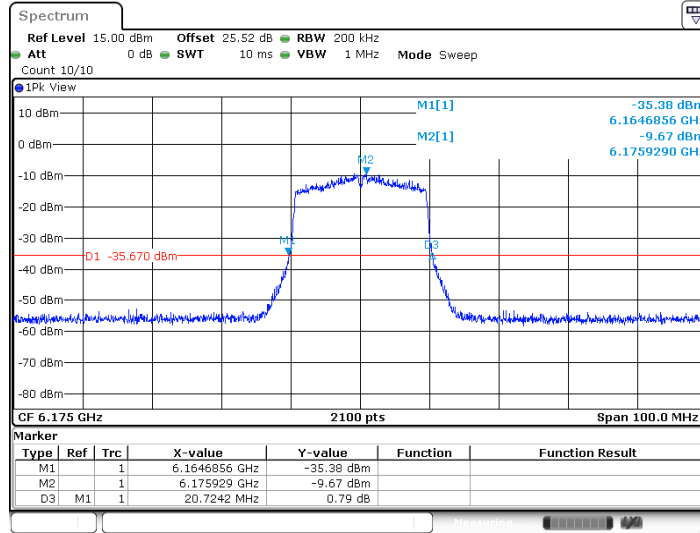

Date: 26.SEP.2024 19:45:14


11AX20MIMO_Ant7_6175

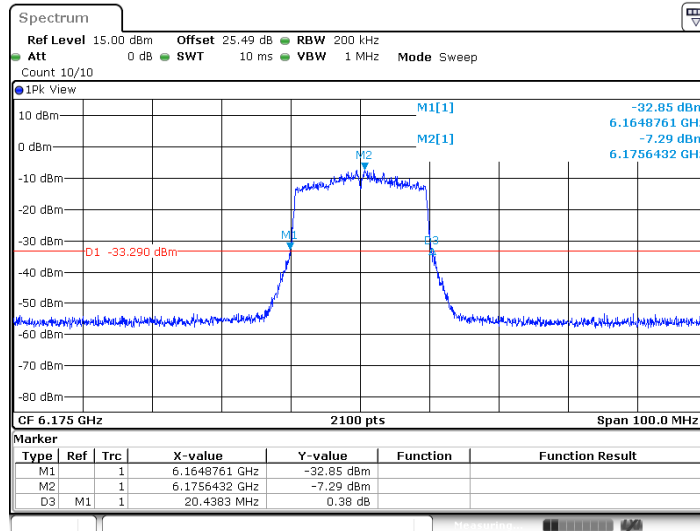


Date: 26.SEP.2024 19:46:15



11AX20MIMO_Ant6_6415

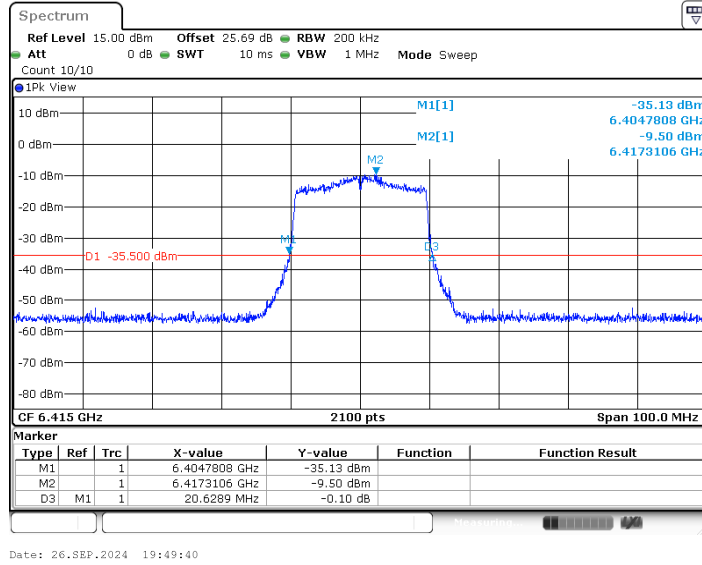


11AX20MIMO_Ant7_6415

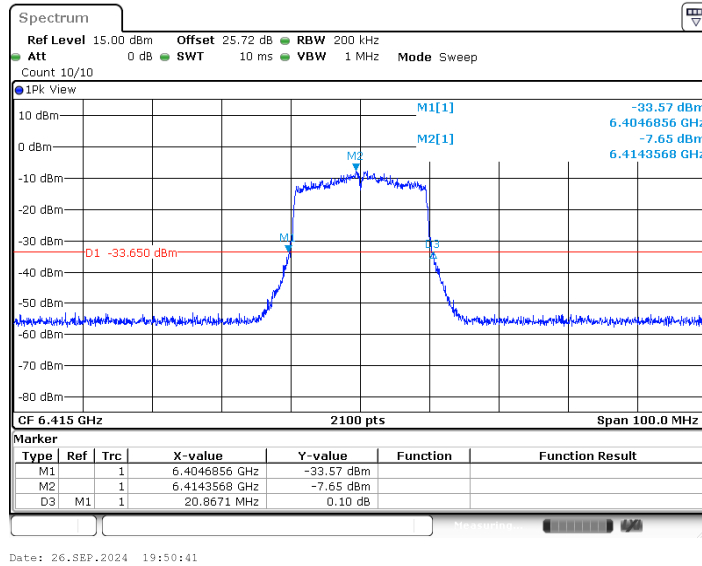




11AX20MIMO_Ant6_6435

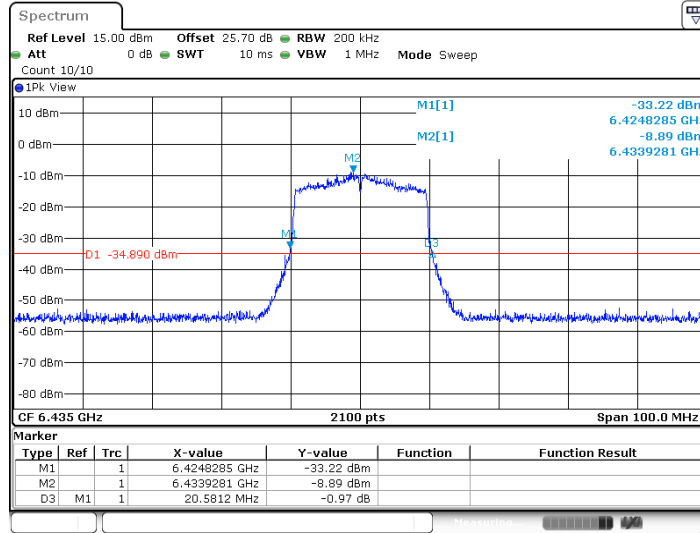

Date: 26.SEP.2024 19:52:57


11AX20MIMO_Ant7_6435

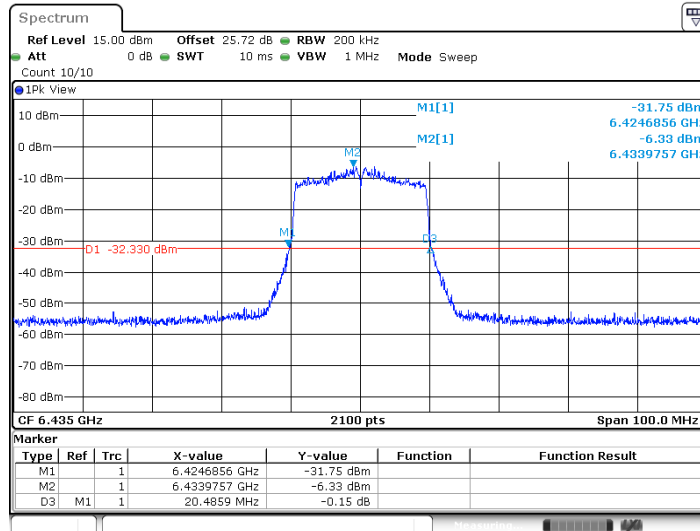

Date: 26.SEP.2024 19:53:58




11AX20MIMO_Ant6_6475

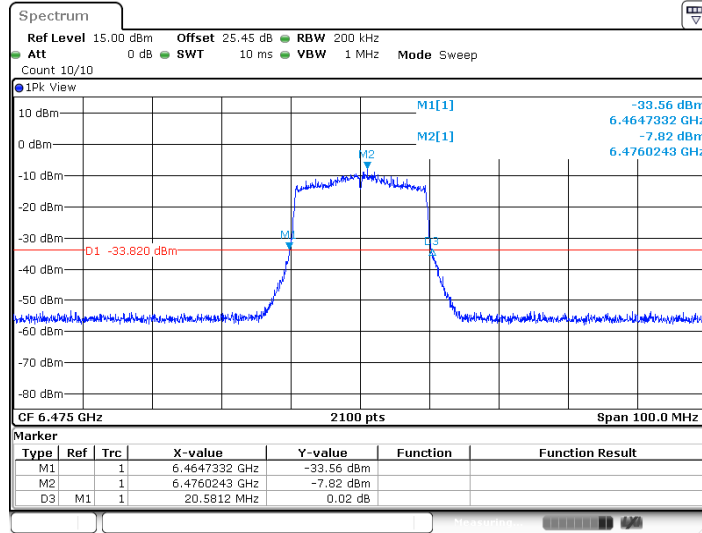

Date: 26.SEP.2024 19:56:45


11AX20MIMO_Ant7_6475

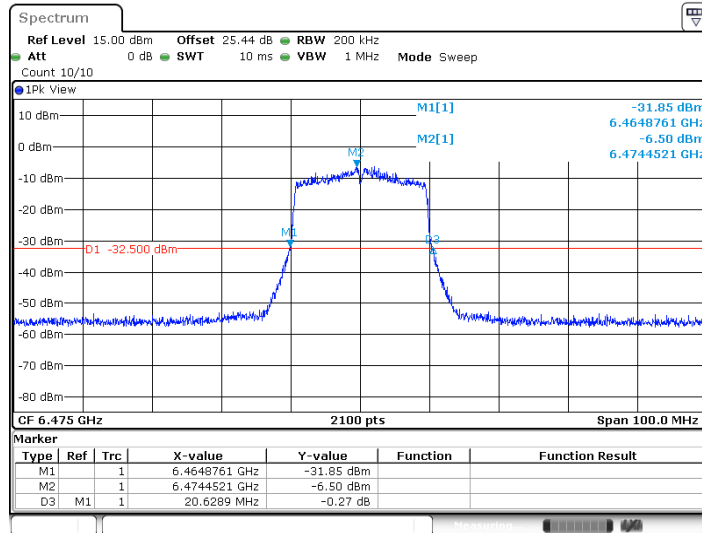

Date: 26.SEP.2024 19:57:46




11AX20MIMO_Ant6_6515

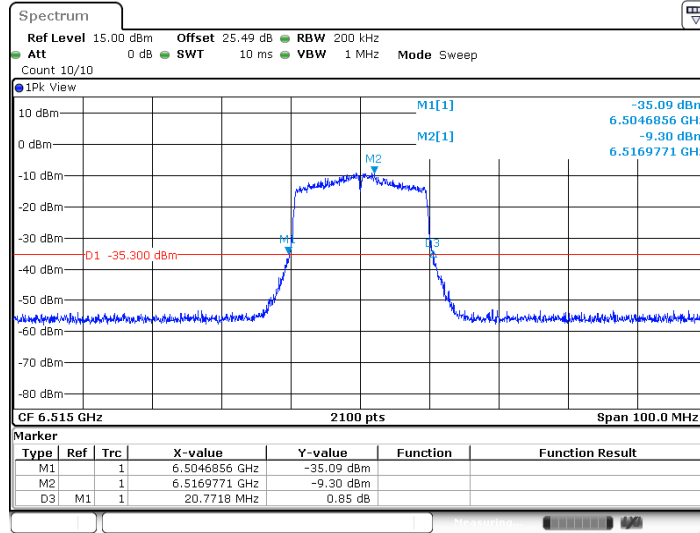

Date: 26.SEP.2024 20:03:16


11AX20MIMO_Ant7_6515

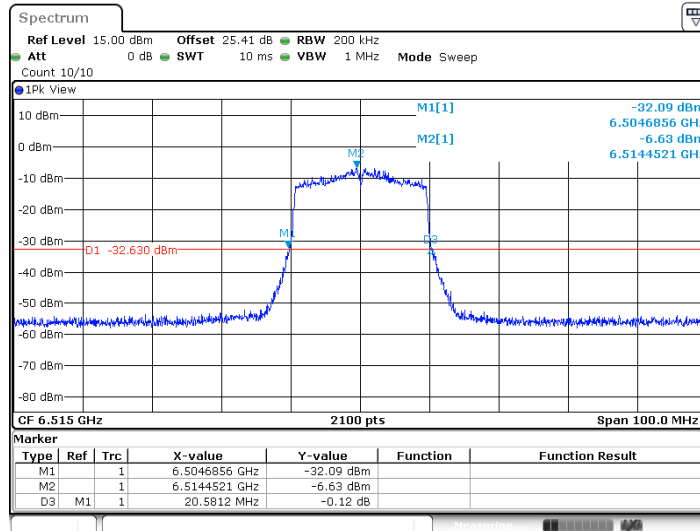

Date: 26.SEP.2024 20:04:00




11AX20MIMO_Ant6_6535

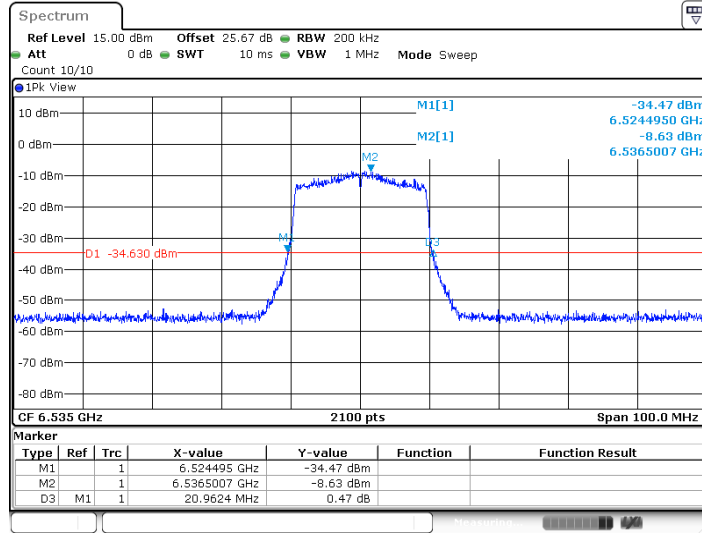

Date: 26.SEP.2024 20:45:13


11AX20MIMO_Ant7_6535

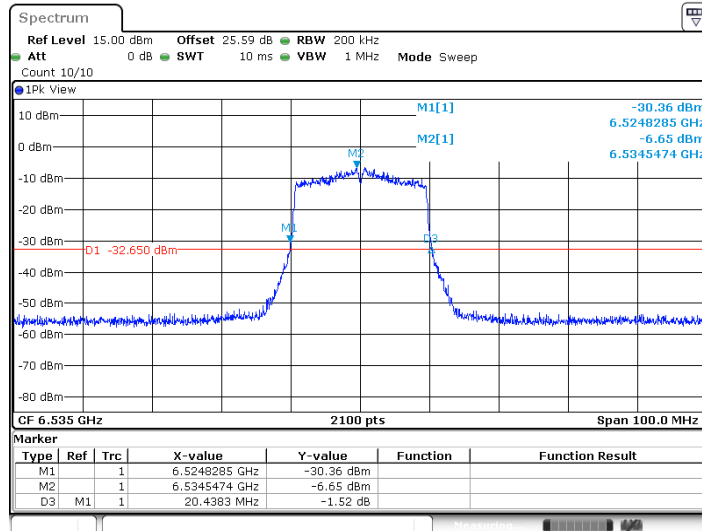


Date: 26.SEP.2024 20:46:15



11AX20MIMO_Ant6_6695

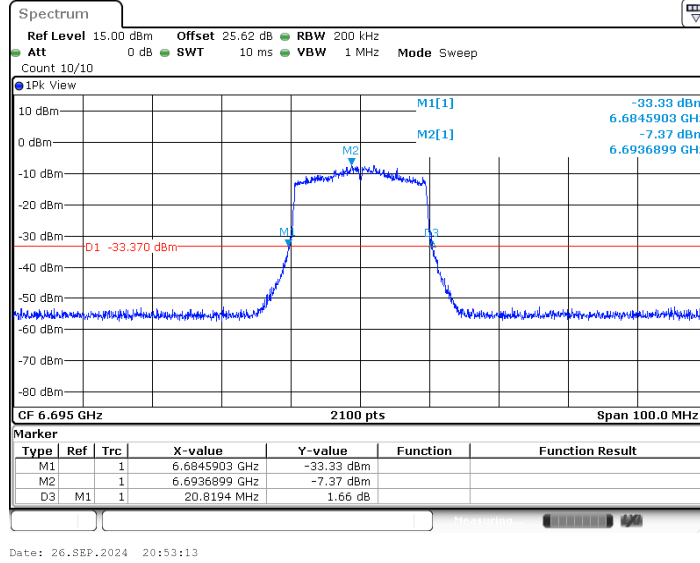


11AX20MIMO_Ant7_6695

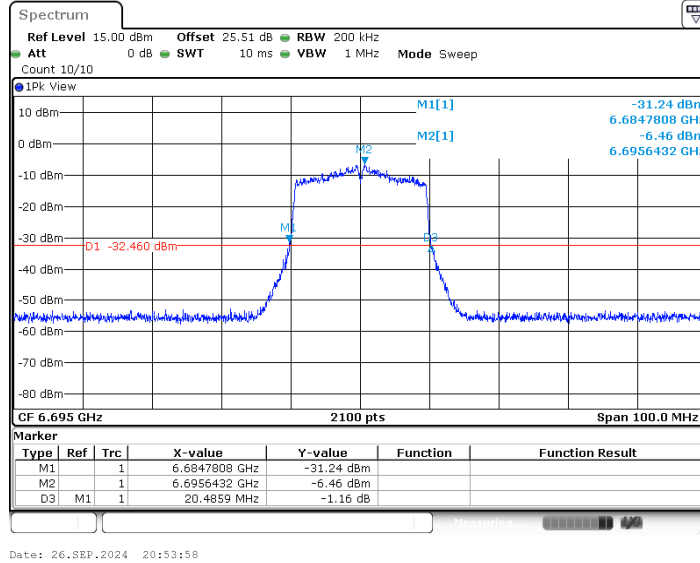




11AX20MIMO_Ant6_6855

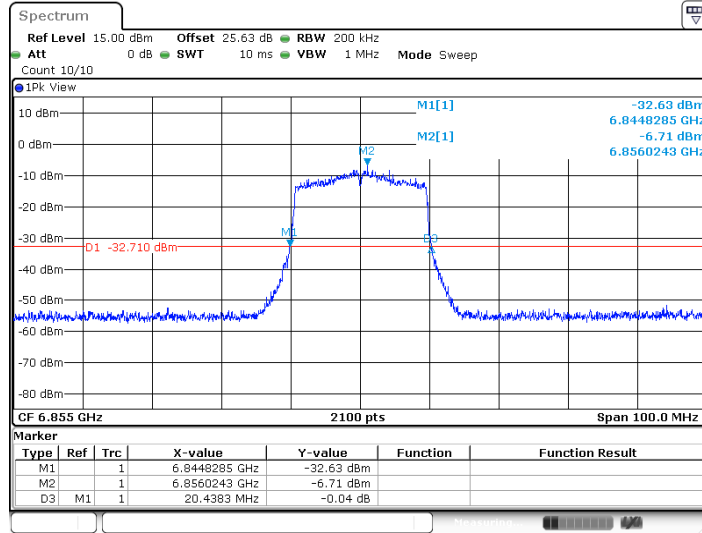

Date: 26.SEP.2024 20:55:00


11AX20MIMO_Ant7_6855

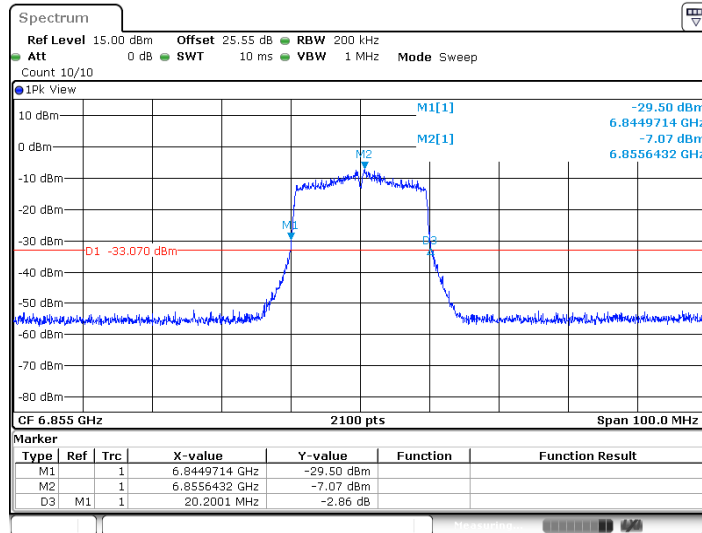


Date: 26.SEP.2024 20:56:05



11AX20MIMO_Ant6_6875

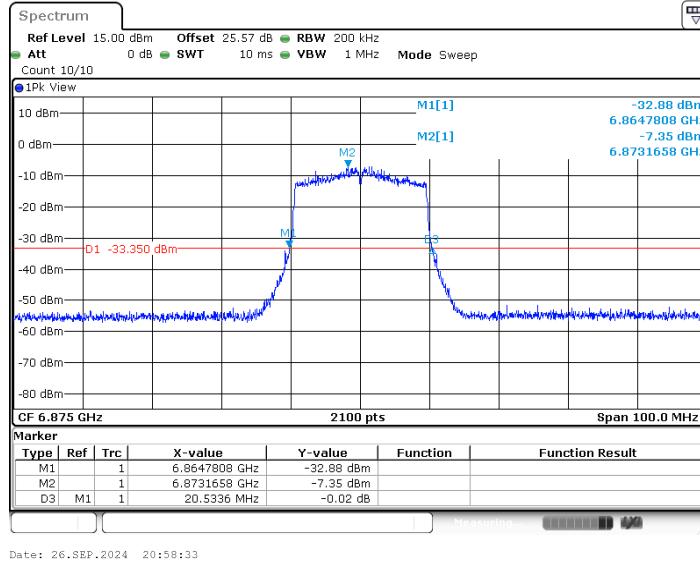


11AX20MIMO_Ant7_6875

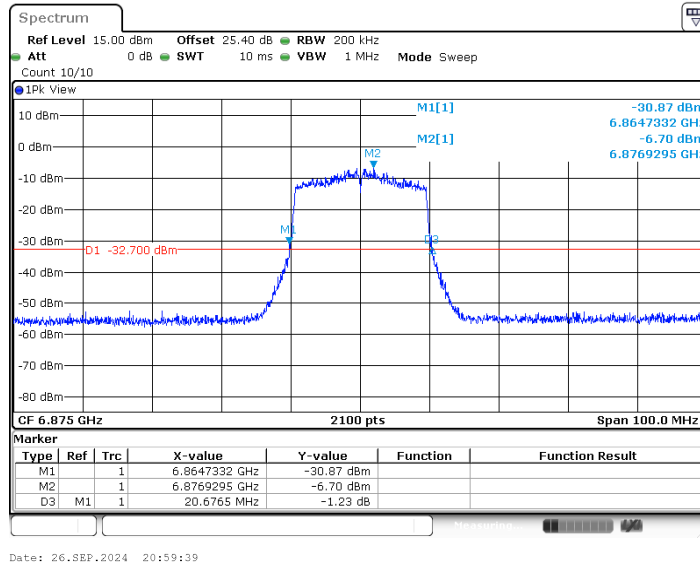




11AX20MIMO_Ant6_6895

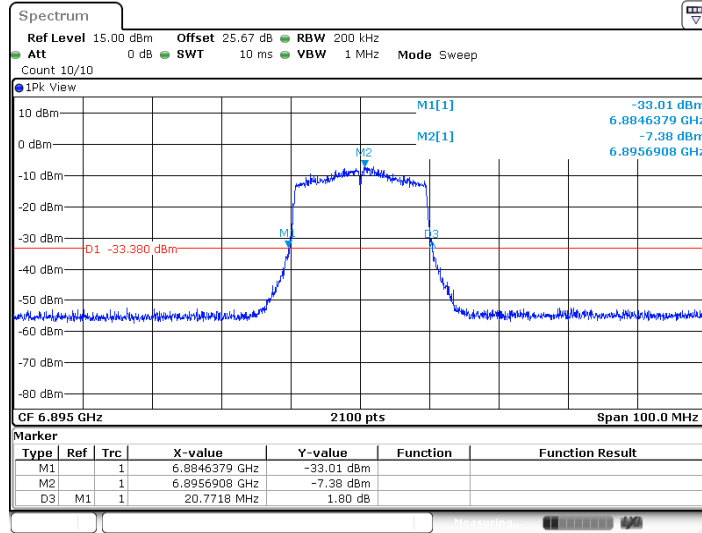

Date: 26.SEP.2024 21:16:11


11AX20MIMO_Ant7_6895

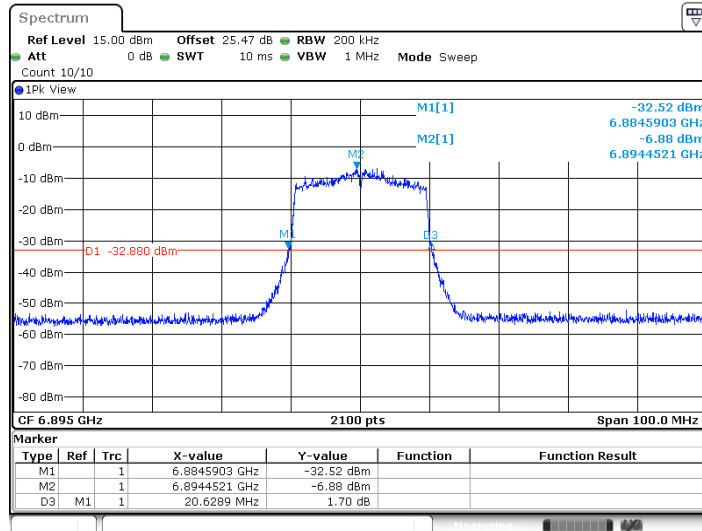

Date: 26.SEP.2024 21:17:16




11AX20MIMO_Ant6_6995

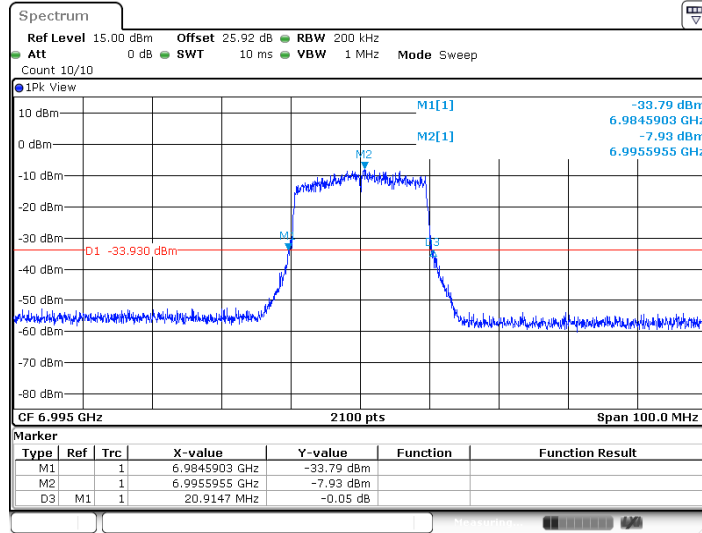

Date: 26.SEP.2024 21:18:30


11AX20MIMO_Ant7_6995

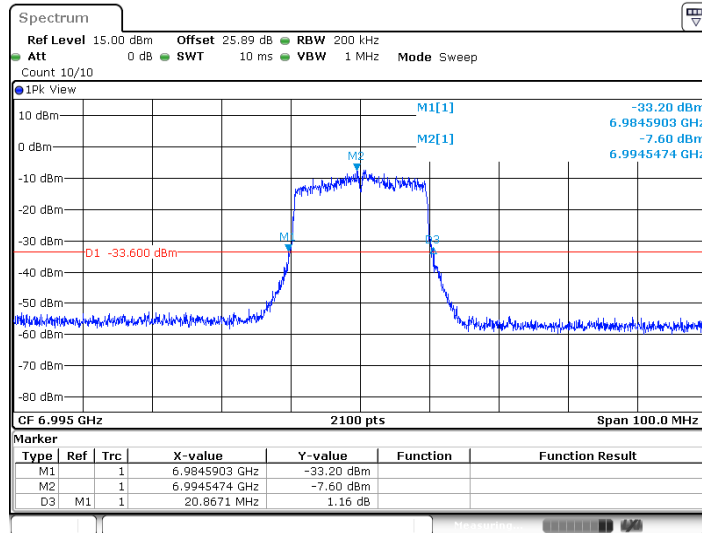

Date: 26.SEP.2024 21:19:36




11AX20MIMO_Ant6_7095

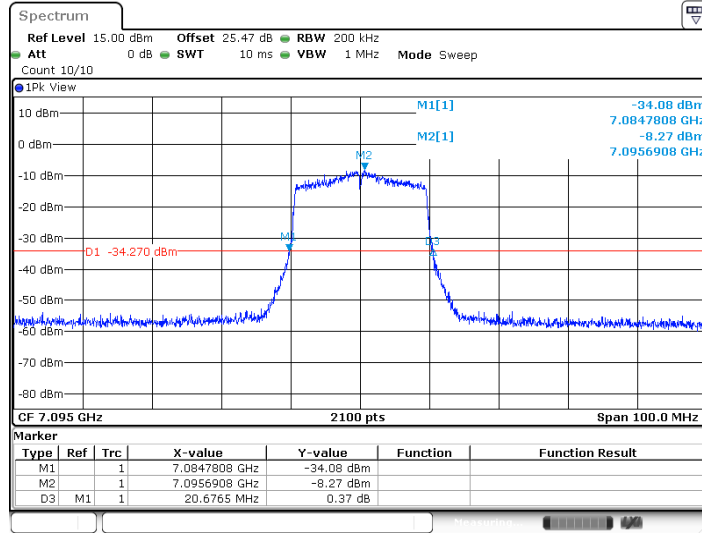

Date: 26.SEP.2024 21:29:27


11AX20MIMO_Ant7_7095

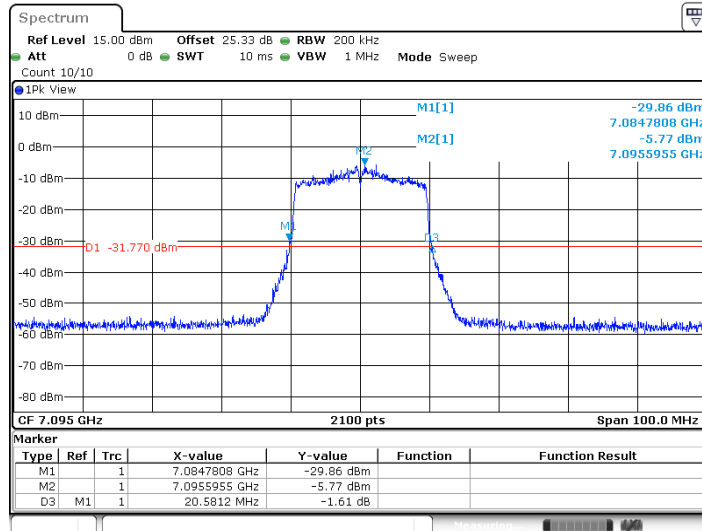


Date: 26.SEP.2024 21:30:33



11AX40MIMO_Ant6_5965

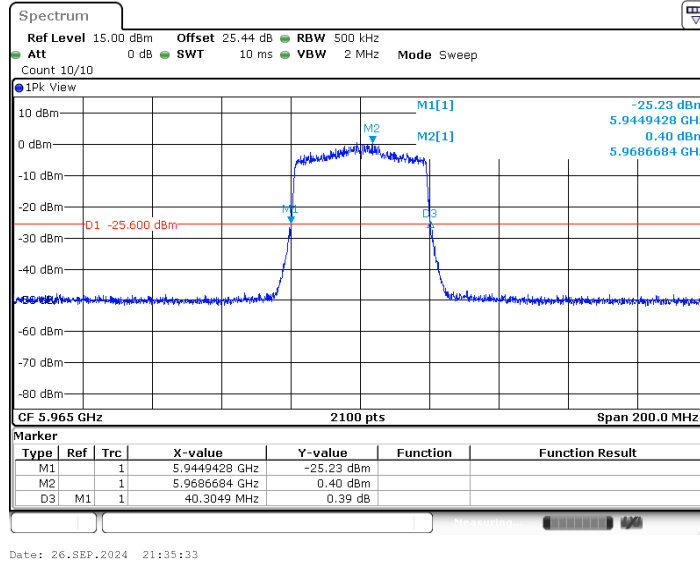


11AX40MIMO_Ant7_5965

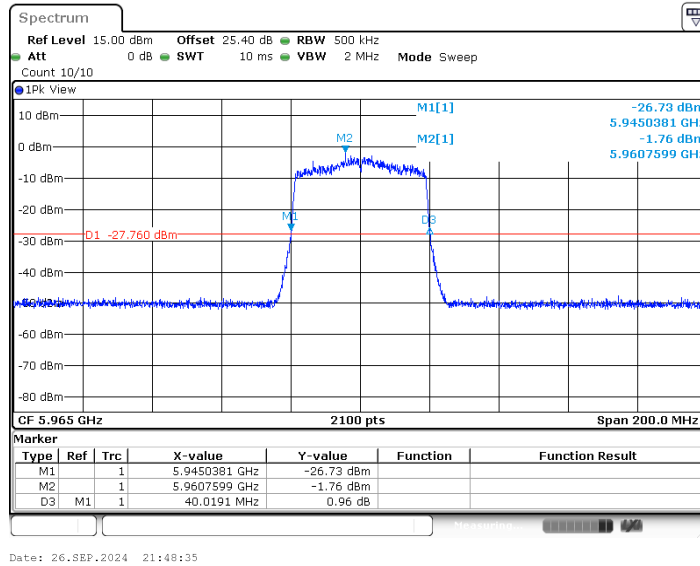




11AX40MIMO_Ant6_6165

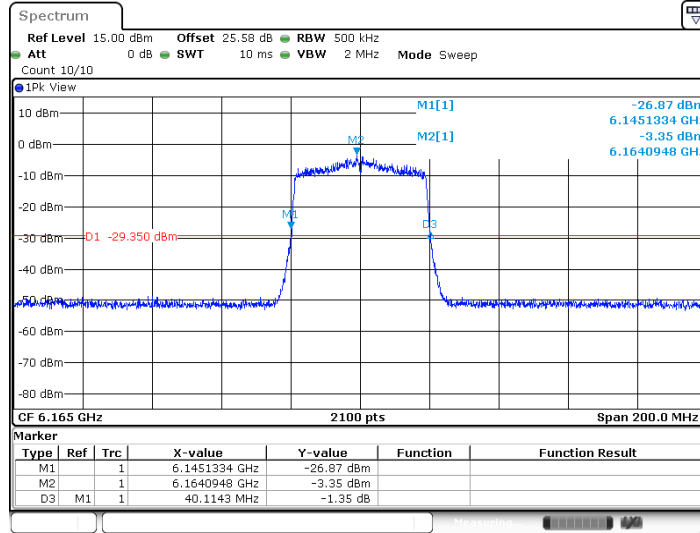

Date: 26.SEP.2024 21:55:12


11AX40MIMO_Ant7_6165

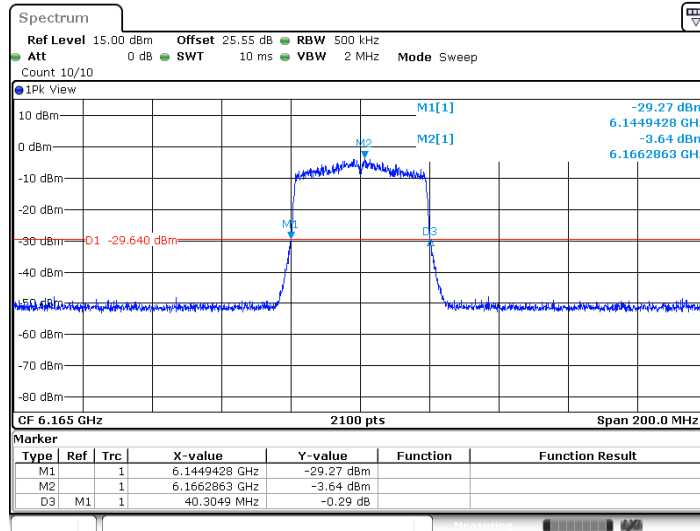

Date: 26.SEP.2024 21:56:18




11AX40MIMO_Ant6_6405

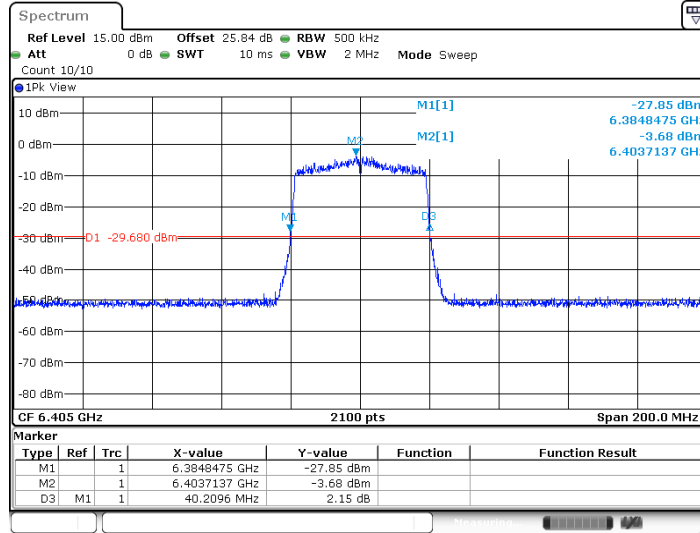

Date: 26.SEP.2024 22:10:12


11AX40MIMO_Ant7_6405

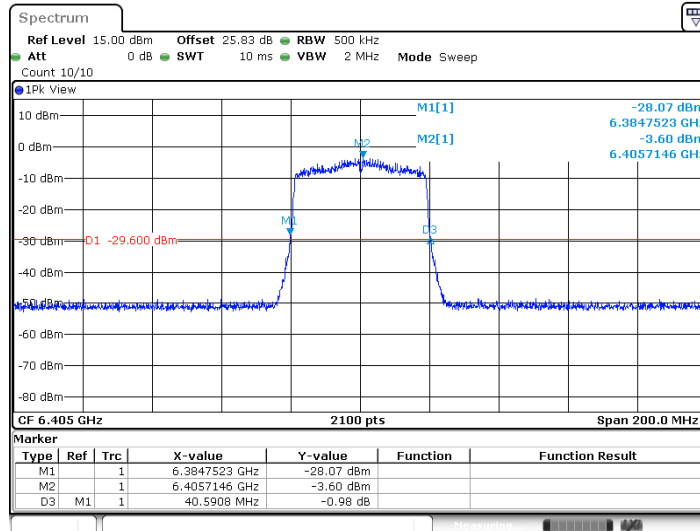

Date: 26.SEP.2024 22:11:17




11AX40MIMO_Ant6_6445

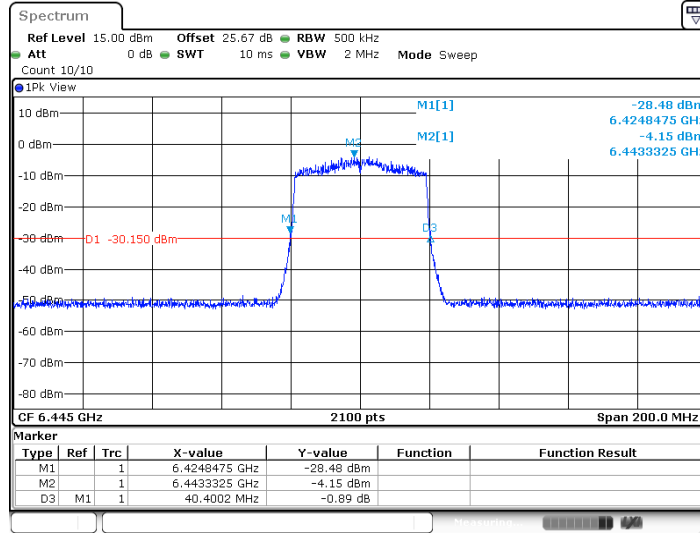

Date: 26.SEP.2024 22:15:31


11AX40MIMO_Ant7_6445

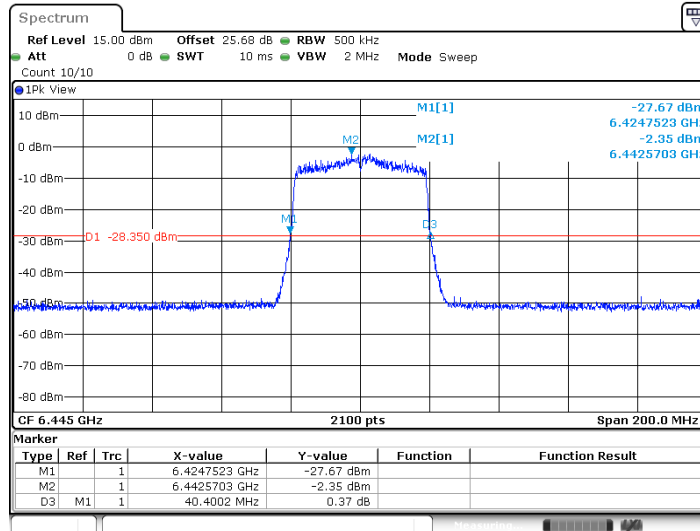

Date: 26.SEP.2024 22:16:36




11AX40MIMO_Ant6_6485

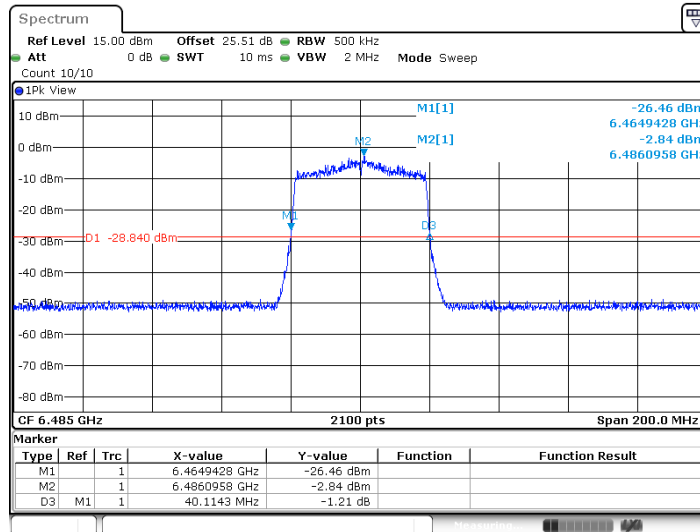

Date: 26.SEP.2024 22:20:28


11AX40MIMO_Ant7_6485

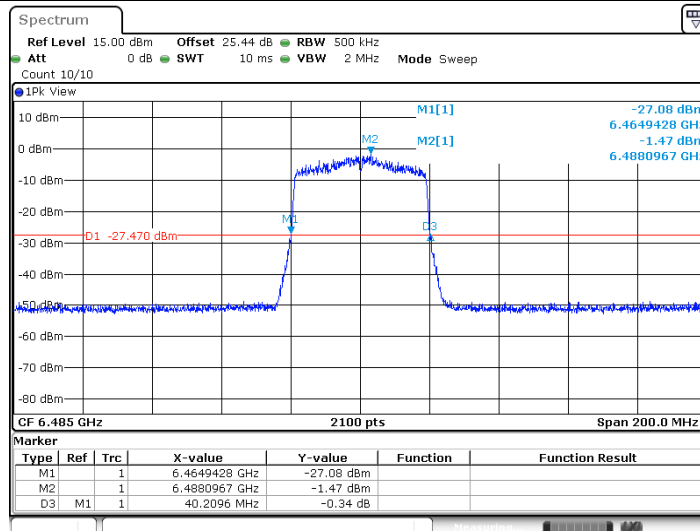

Date: 26.SEP.2024 22:21:34




11AX40MIMO_Ant6_6525

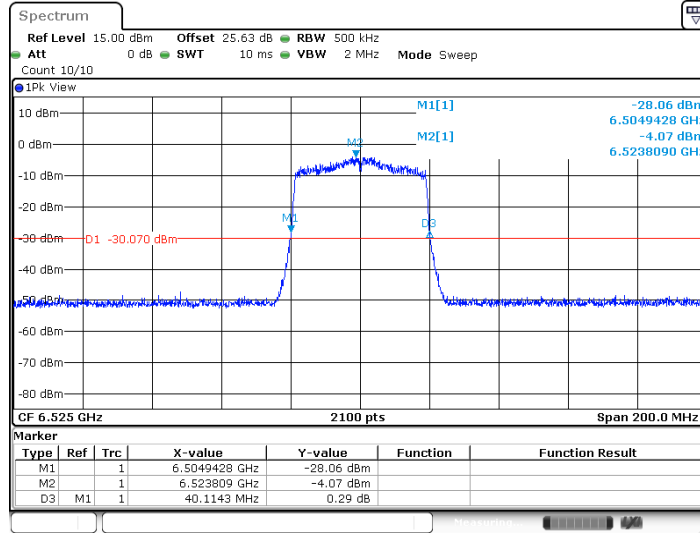

Date: 26.SEP.2024 22:22:59


11AX40MIMO_Ant7_6525

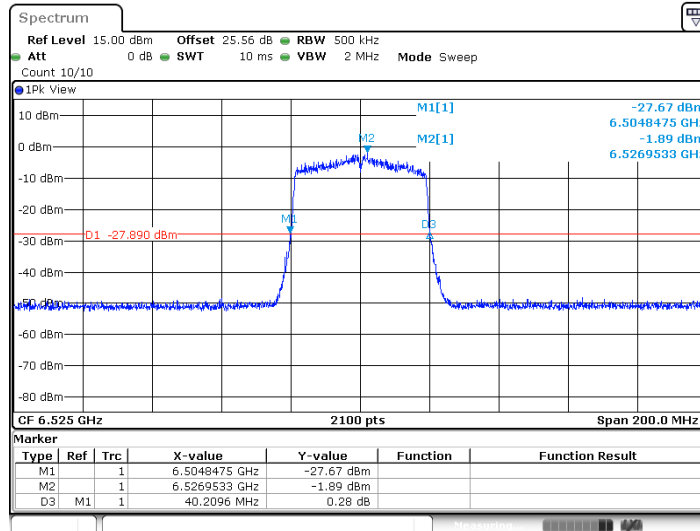

Date: 26.SEP.2024 22:24:05




11AX40MIMO_Ant6_6565

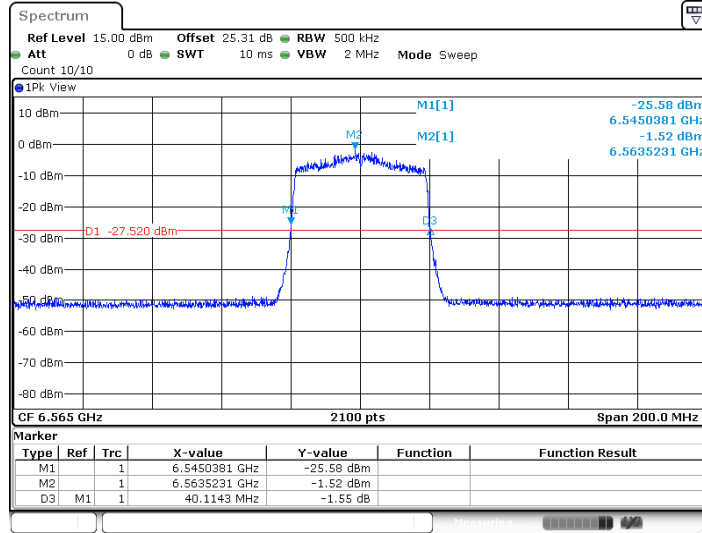

Date: 26.SEP.2024 22:27:56


11AX40MIMO_Ant7_6565

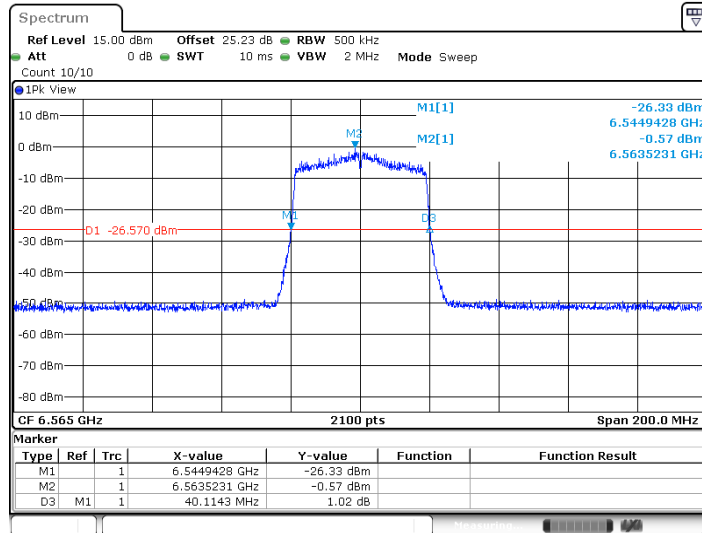

Date: 26.SEP.2024 22:28:57




11AX40MIMO_Ant6_6685

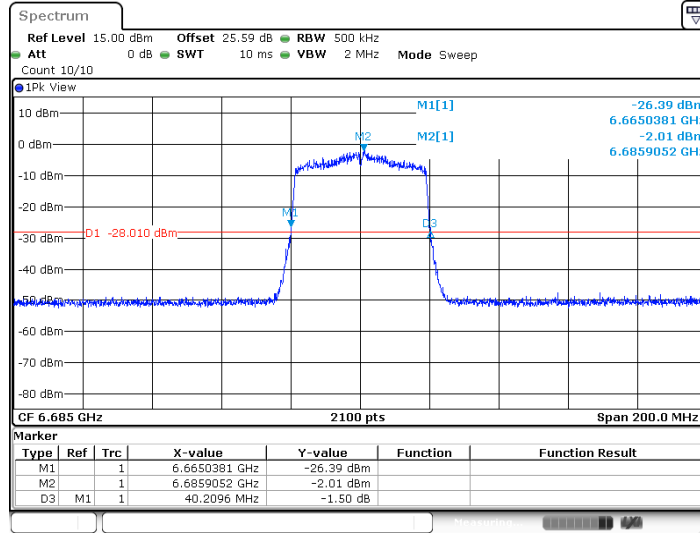

Date: 26.SEP.2024 22:30:12


11AX40MIMO_Ant7_6685

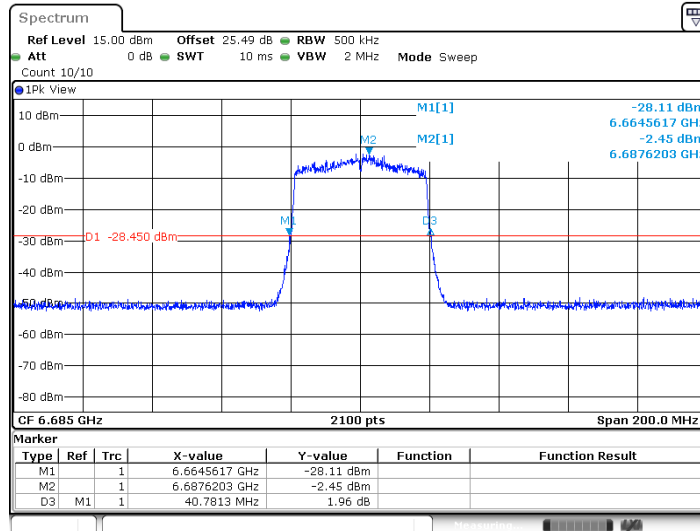


Date: 26.SEP.2024 22:31:17



11AX40MIMO_Ant6_6845

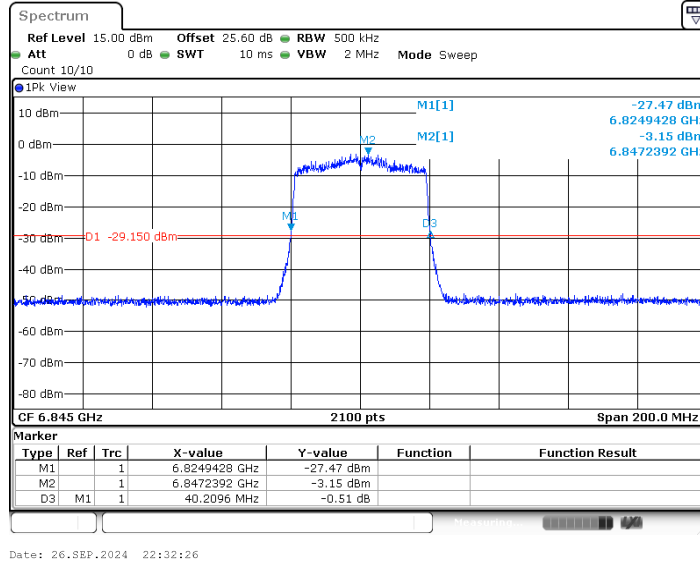


11AX40MIMO_Ant7_6845

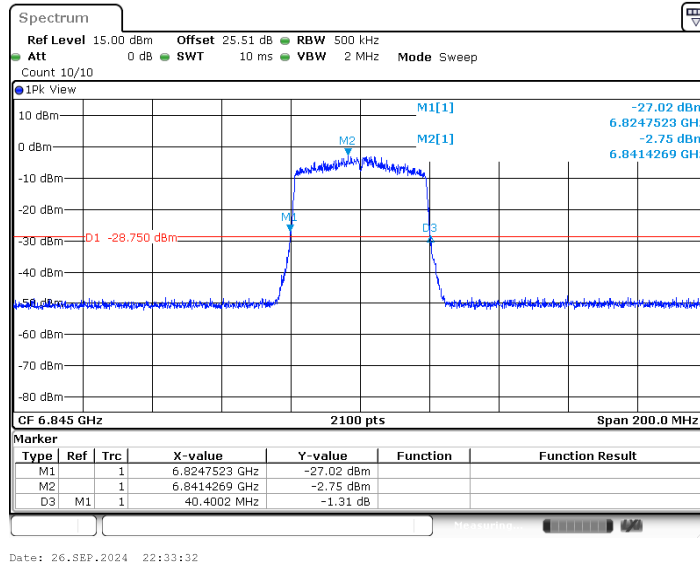




11AX40MIMO_Ant6_6885

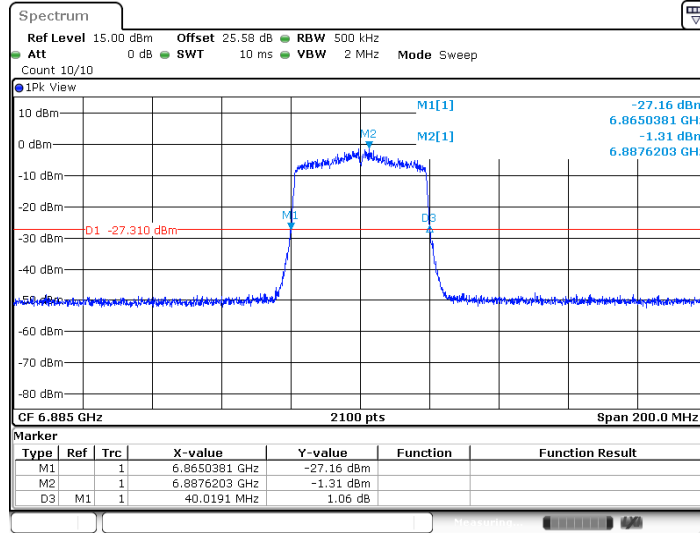

Date: 26.SEP.2024 22:35:57


11AX40MIMO_Ant7_6885

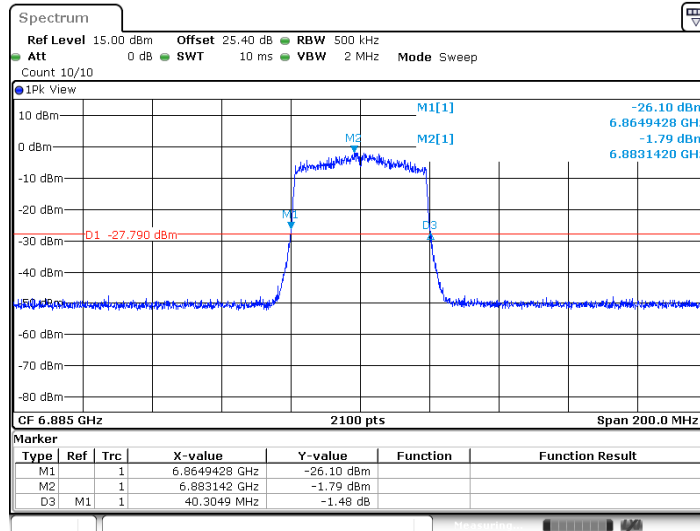


Date: 26.SEP.2024 22:36:58



11AX40MIMO_Ant6_6925

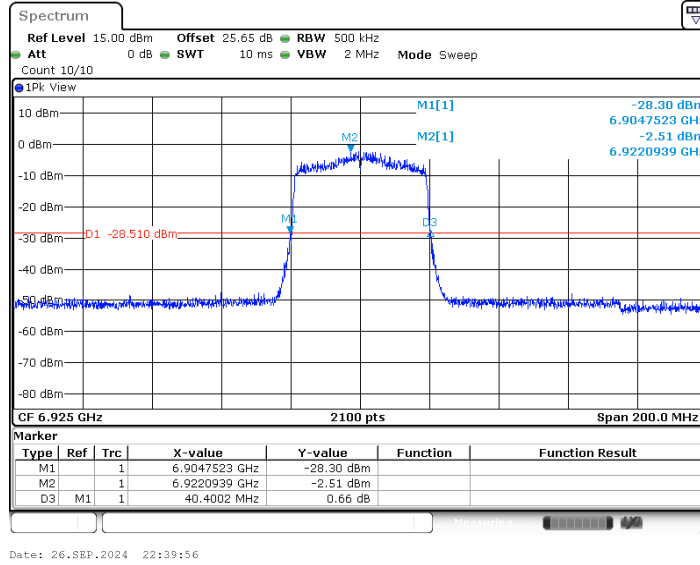


11AX40MIMO_Ant7_6925

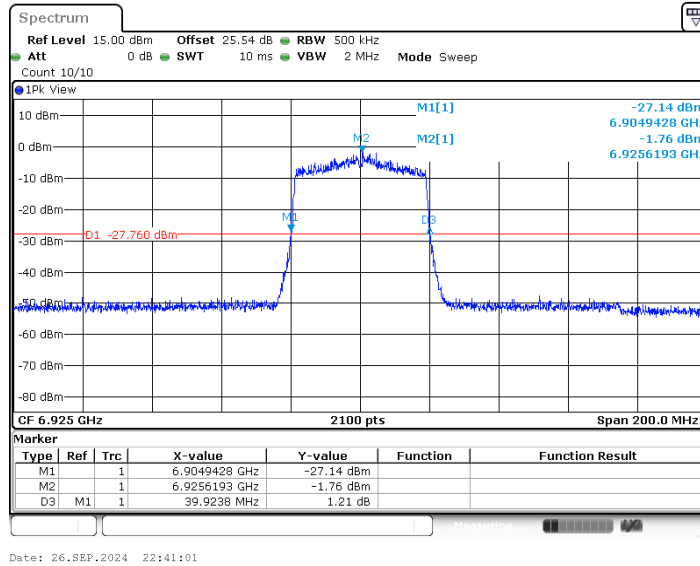




11AX40MIMO_Ant6_6965

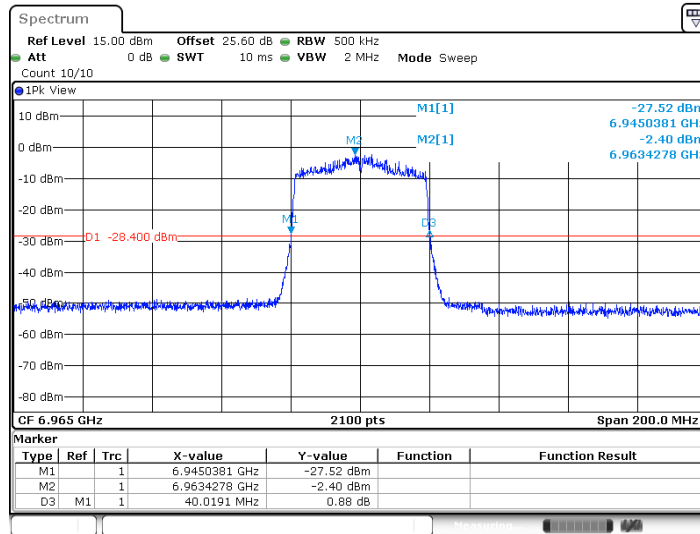

Date: 26.SEP.2024 22:42:17


11AX40MIMO_Ant7_6965

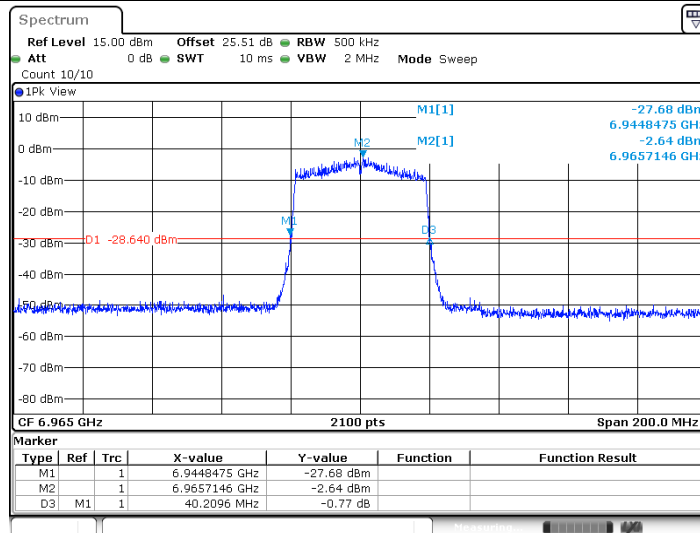

Date: 26.SEP.2024 22:43:23




11AX40MIMO_Ant6_7085

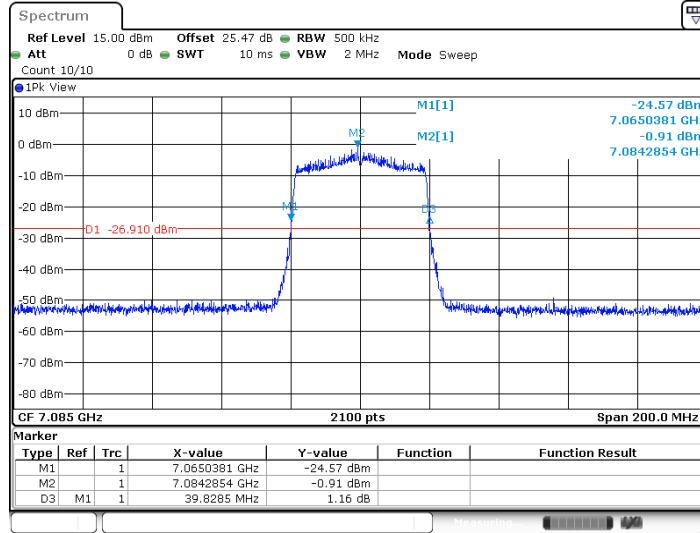

Date: 26.SEP.2024 22:47:06


11AX40MIMO_Ant7_7085

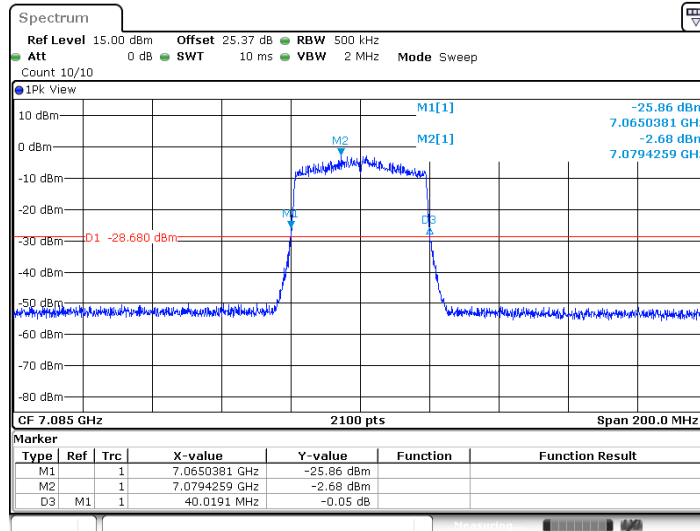

Date: 26.SEP.2024 22:48:08




11AX80MIMO_Ant6_5985

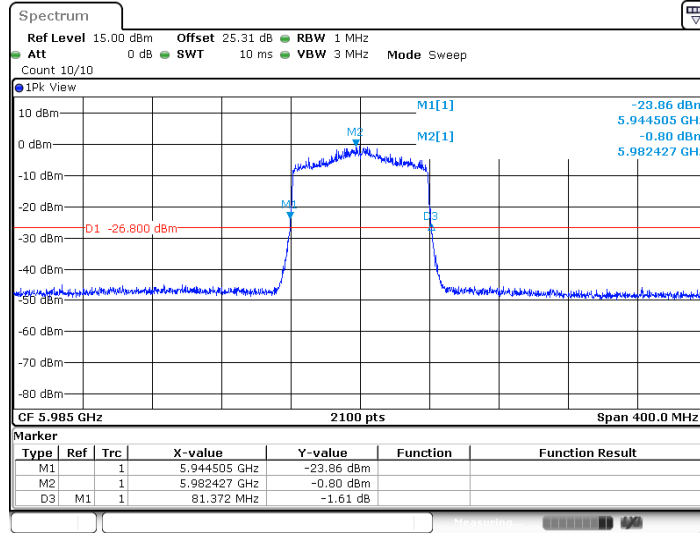

Date: 26.SEP.2024 22:56:14


11AX80MIMO_Ant7_5985

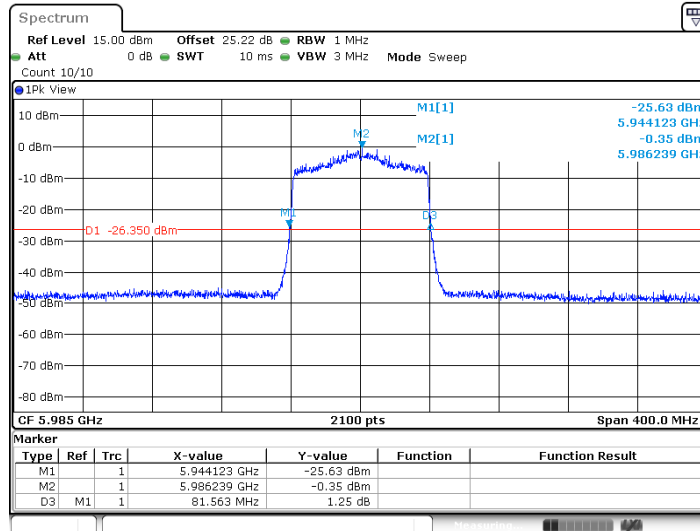


Date: 26.SEP.2024 22:56:59



11AX80MIMO_Ant6_6145

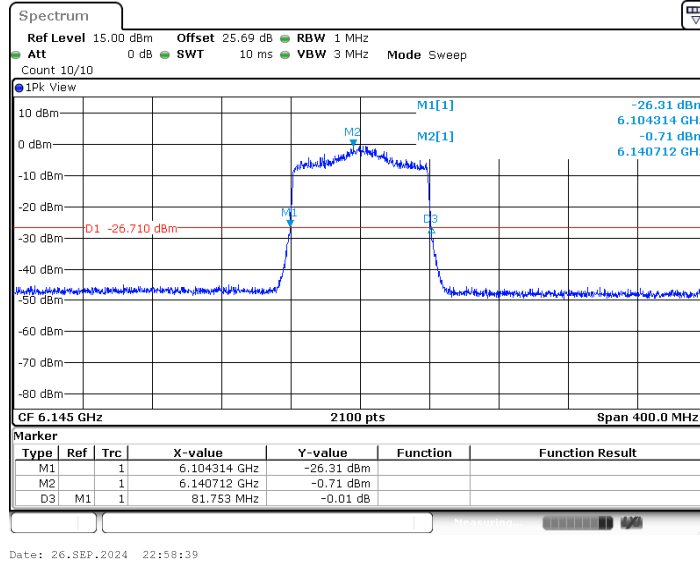


11AX80MIMO_Ant7_6145

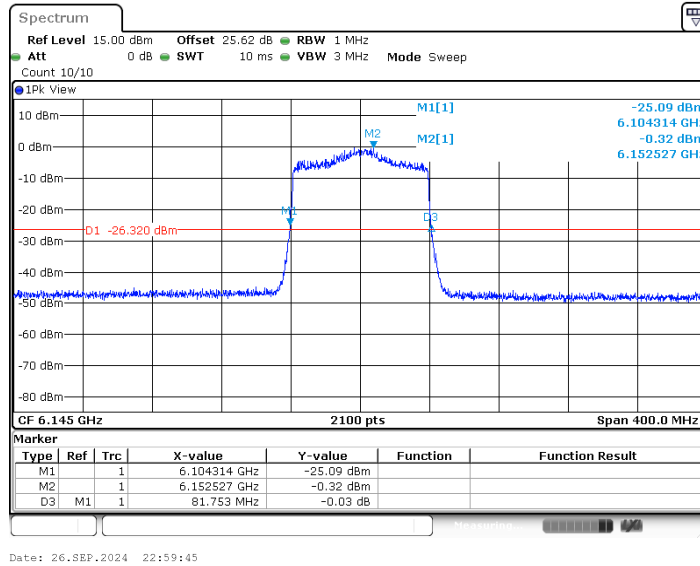




11AX80MIMO_Ant6_6385

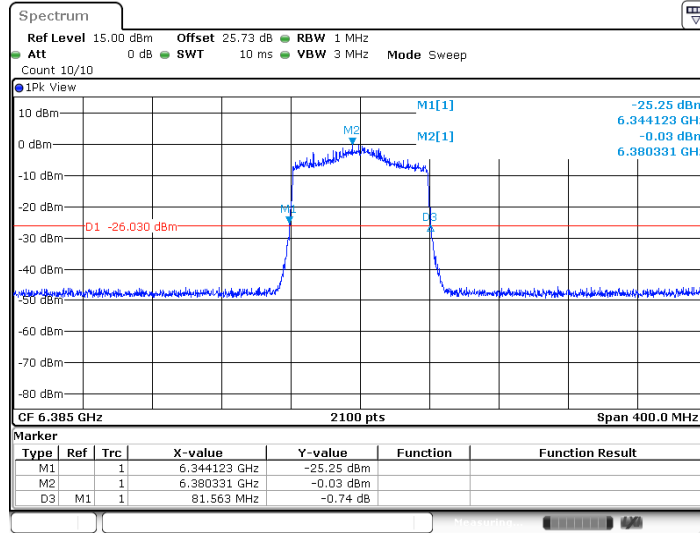


11AX80MIMO_Ant7_6385

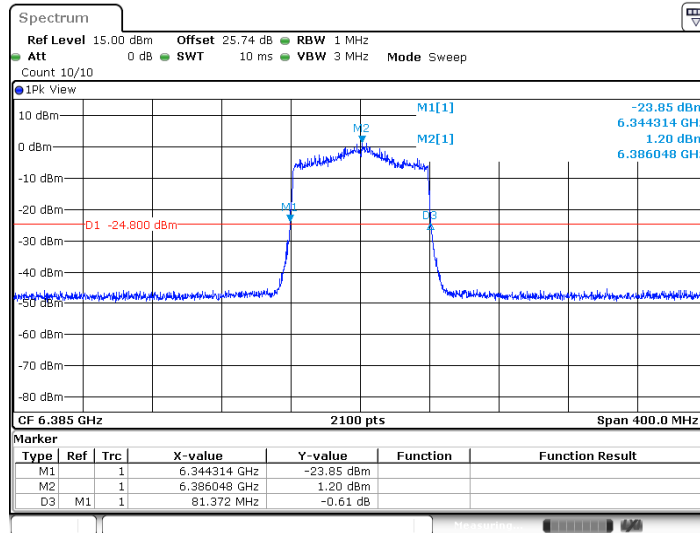




11AX80MIMO_Ant6_6465

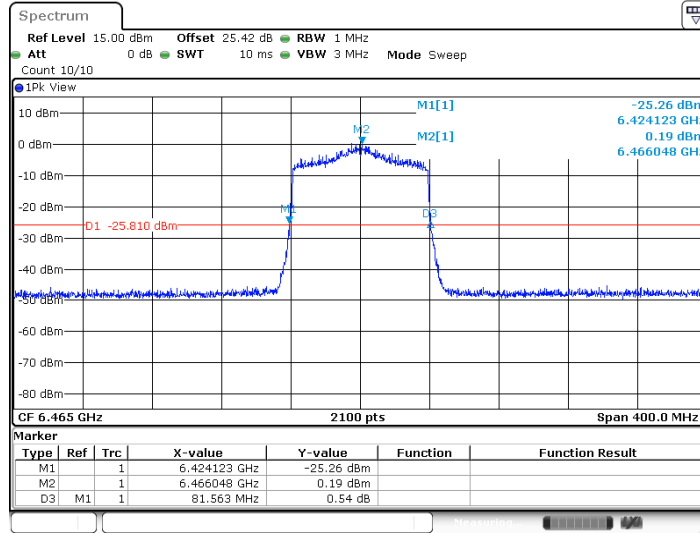

Date: 26.SEP.2024 23:09:45


11AX80MIMO_Ant7_6465

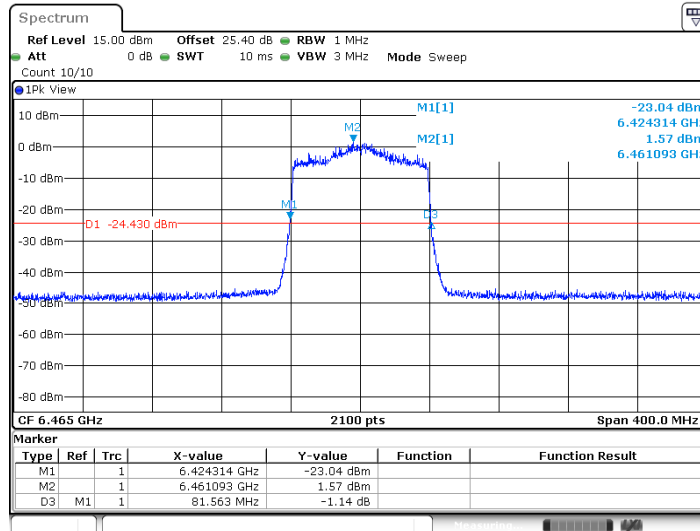

Date: 26.SEP.2024 23:10:46




11AX80MIMO_Ant6_6545

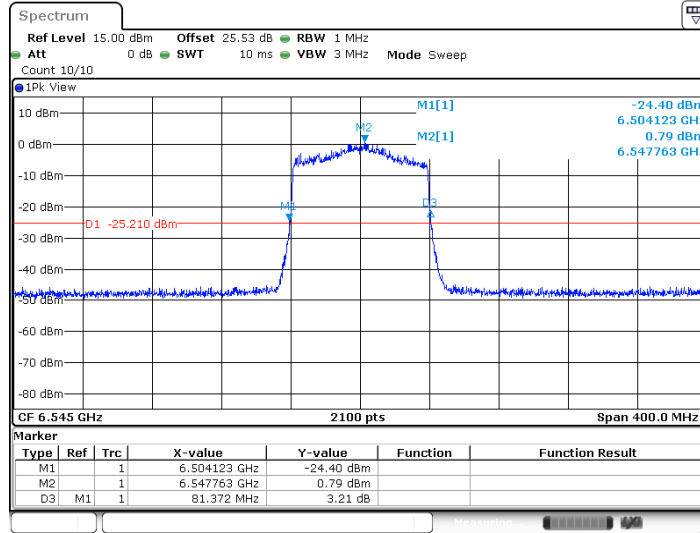

Date: 26.SEP.2024 23:14:45


11AX80MIMO_Ant7_6545

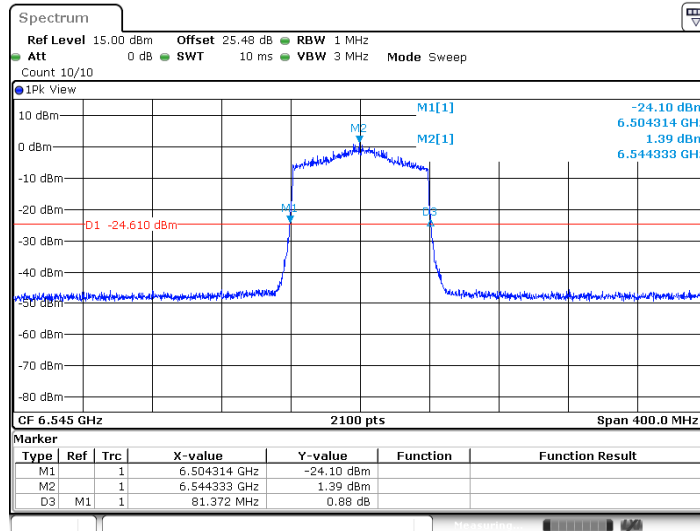

Date: 26.SEP.2024 23:15:46




11AX80MIMO_Ant6_6625

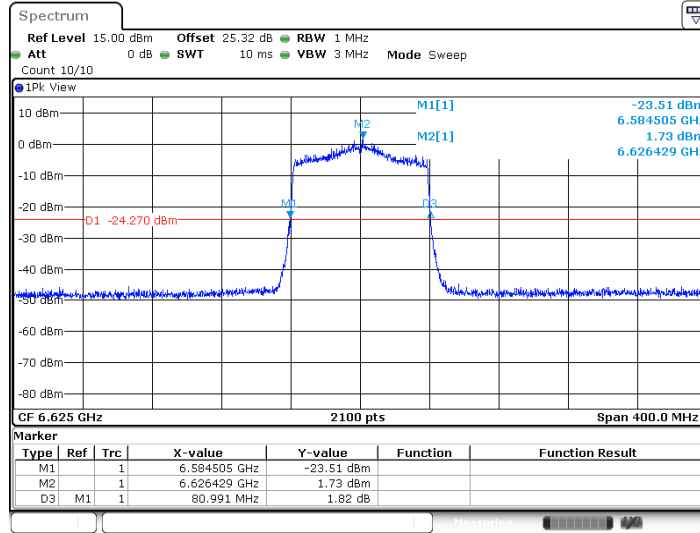

Date: 26.SEP.2024 23:17:55


11AX80MIMO_Ant7_6625

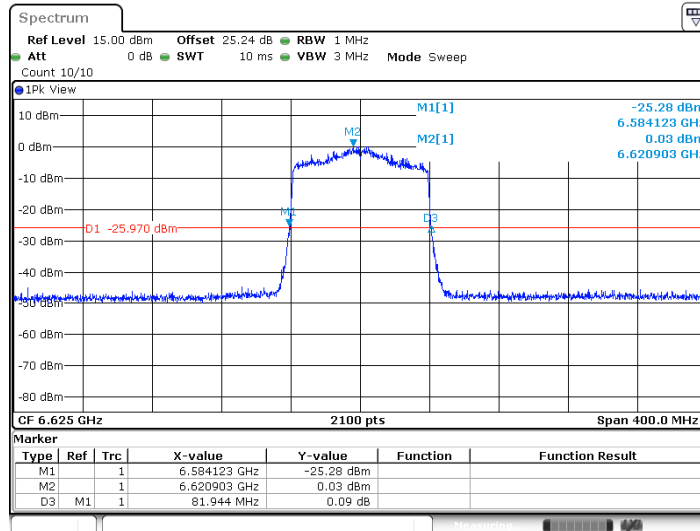


Date: 26.SEP.2024 23:18:56



11AX80MIMO_Ant6_6705

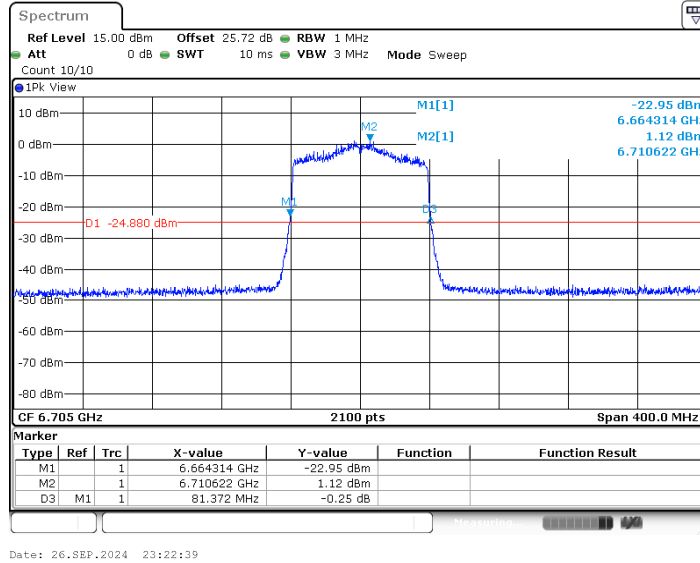


11AX80MIMO_Ant7_6705

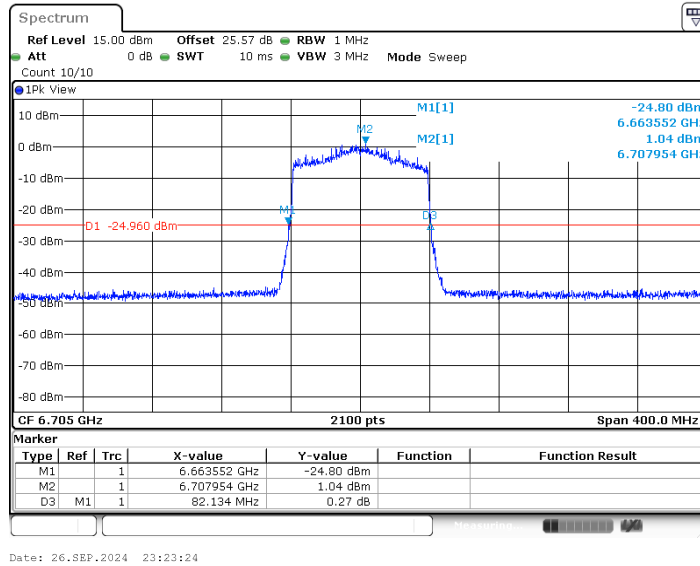




11AX80MIMO_Ant6_6785

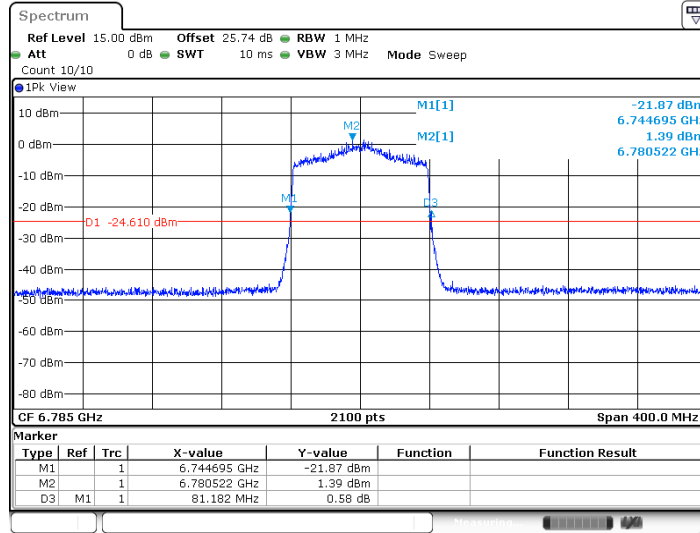

Date: 26.SEP.2024 23:25:19


11AX80MIMO_Ant7_6785

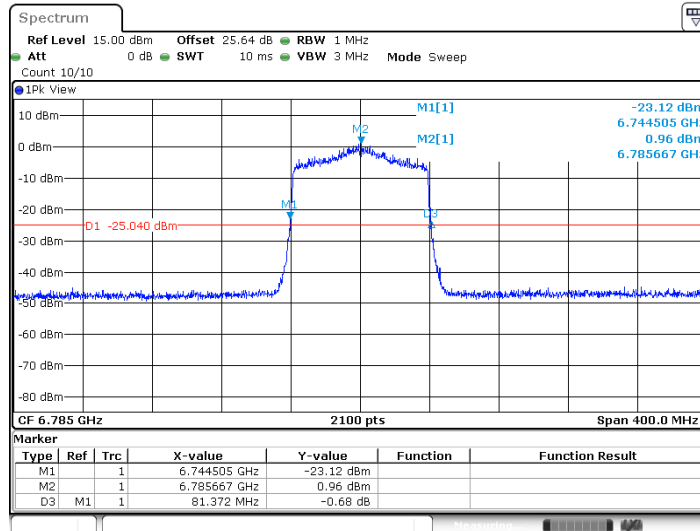


Date: 26.SEP.2024 23:26:03



11AX80MIMO_Ant6_6865

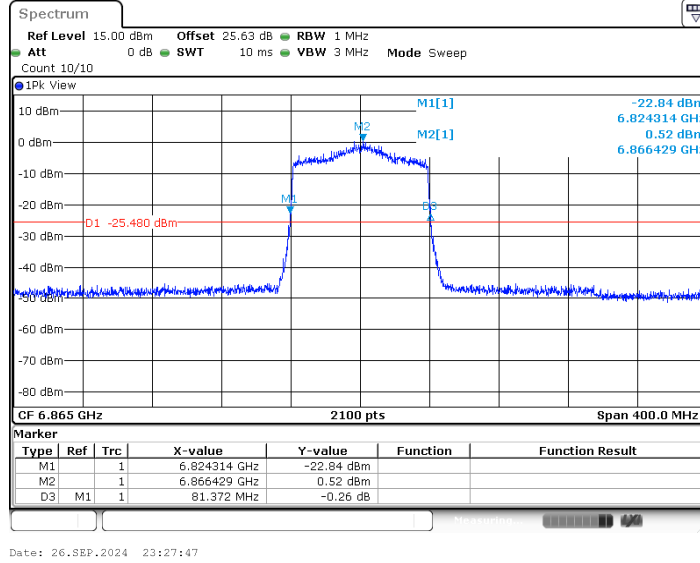


11AX80MIMO_Ant7_6865

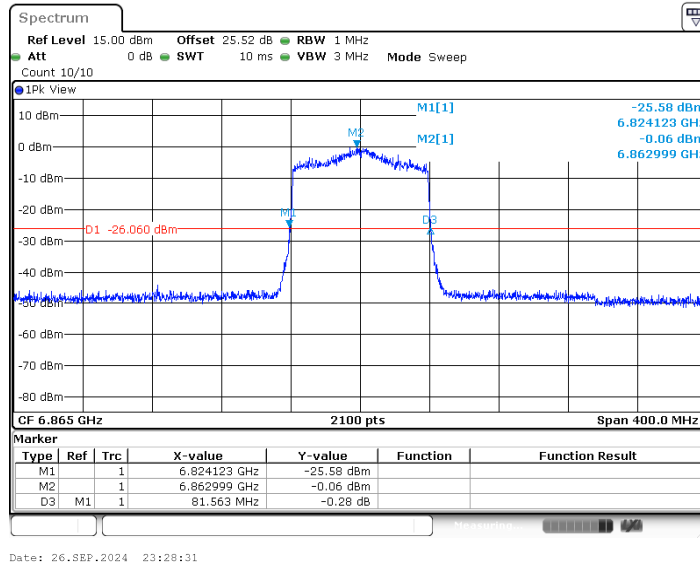




11AX80MIMO_Ant6_6945

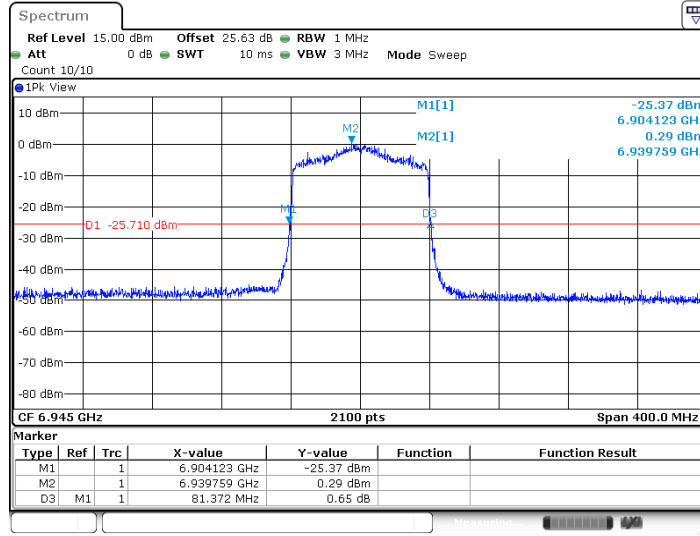

Date: 26.SEP.2024 23:29:27


11AX80MIMO_Ant7_6945

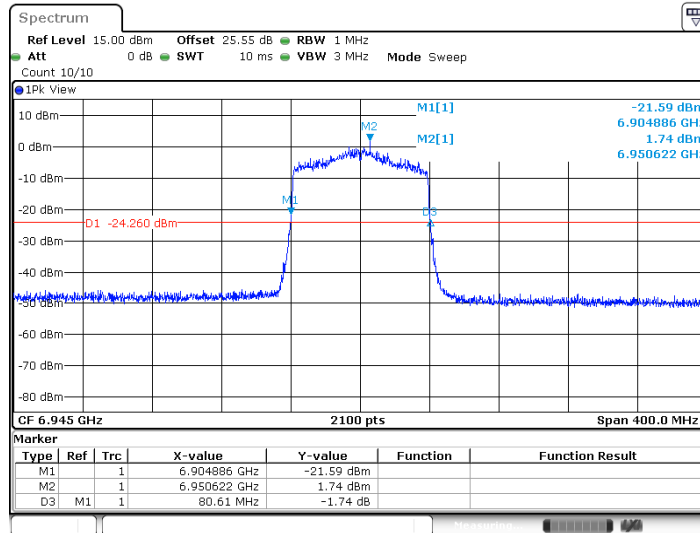


Date: 26.SEP.2024 23:30:32



11AX80MIMO_Ant6_7025

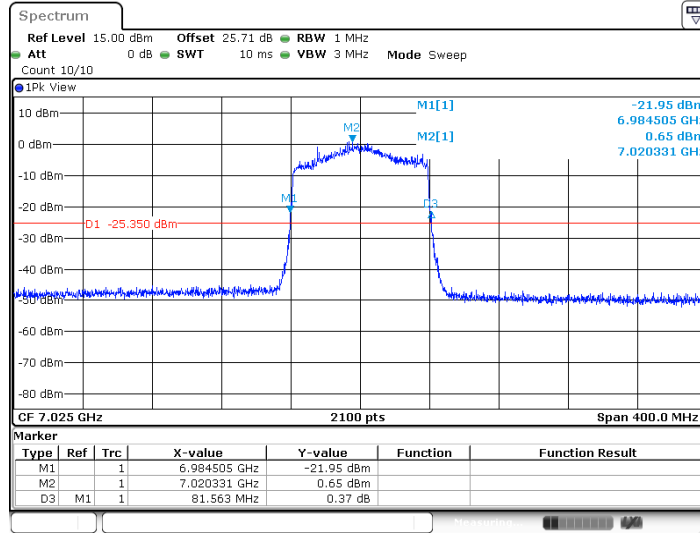


11AX80MIMO_Ant7_7025

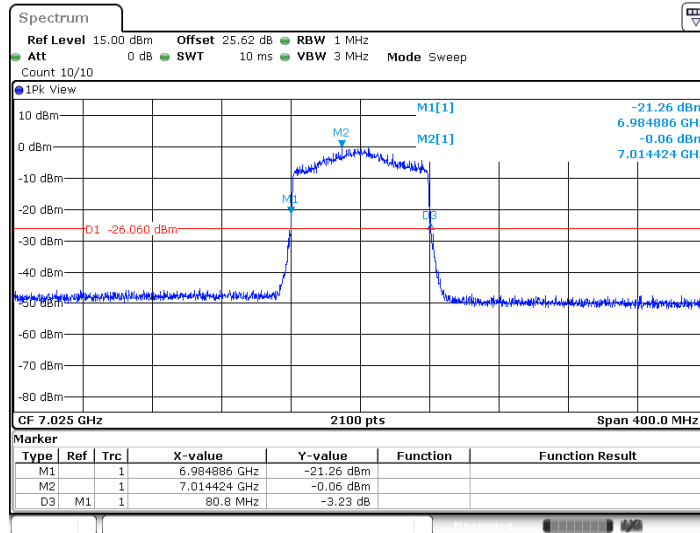




11AX160MIMO_Ant6_6025

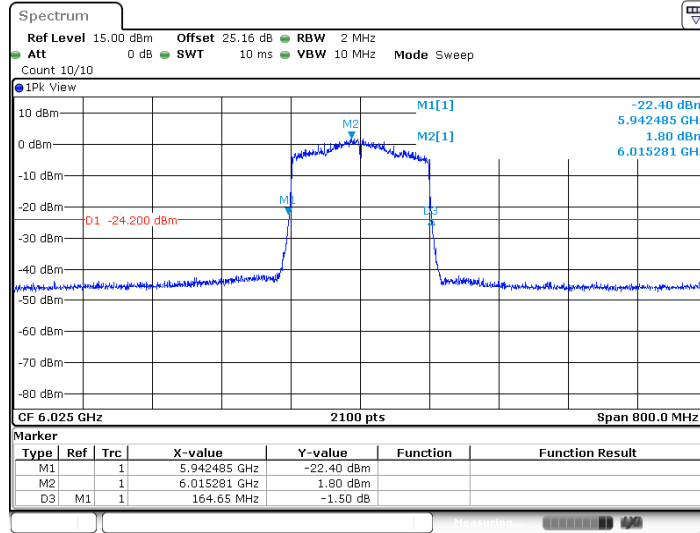



Date: 26.SEP.2024 23:54:13

11AX160MIMO_Ant7_6025

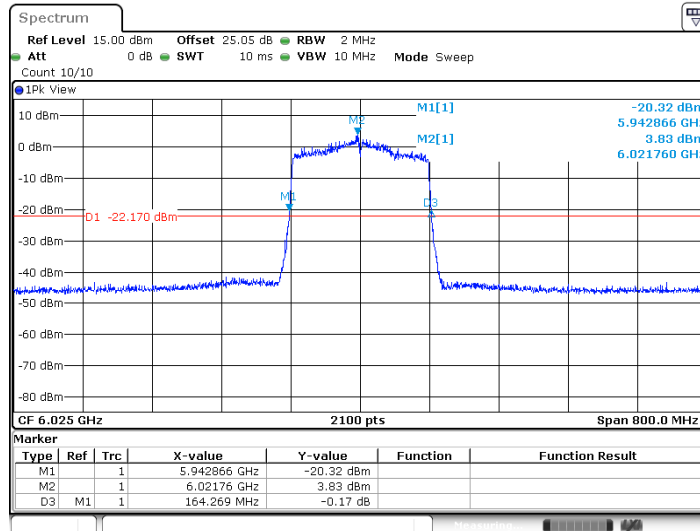


Date: 26.SEP.2024 23:54:57

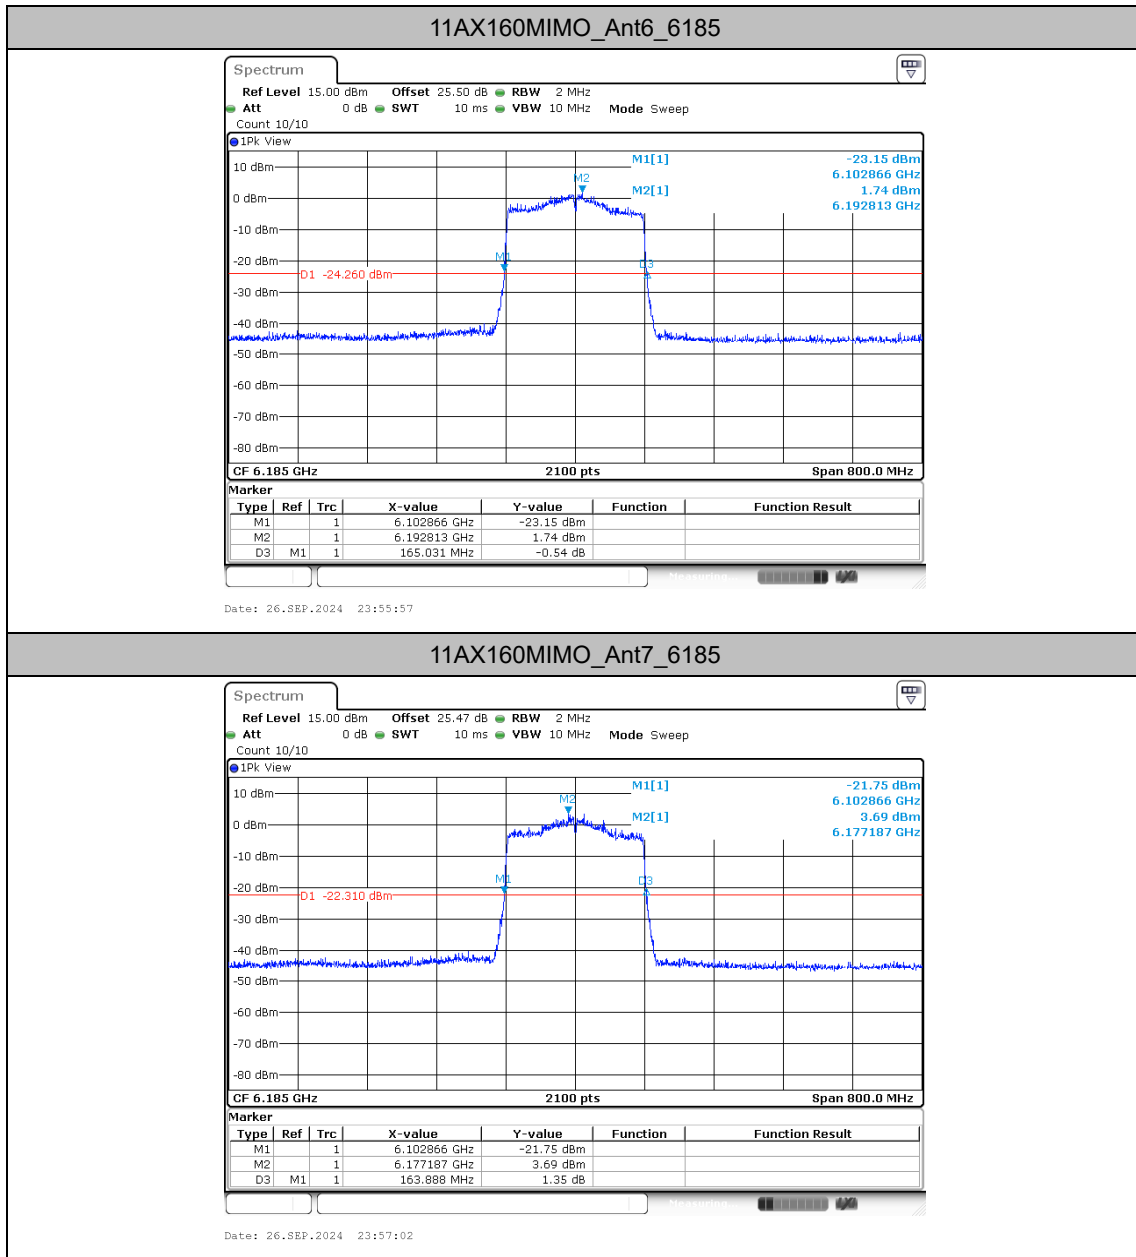

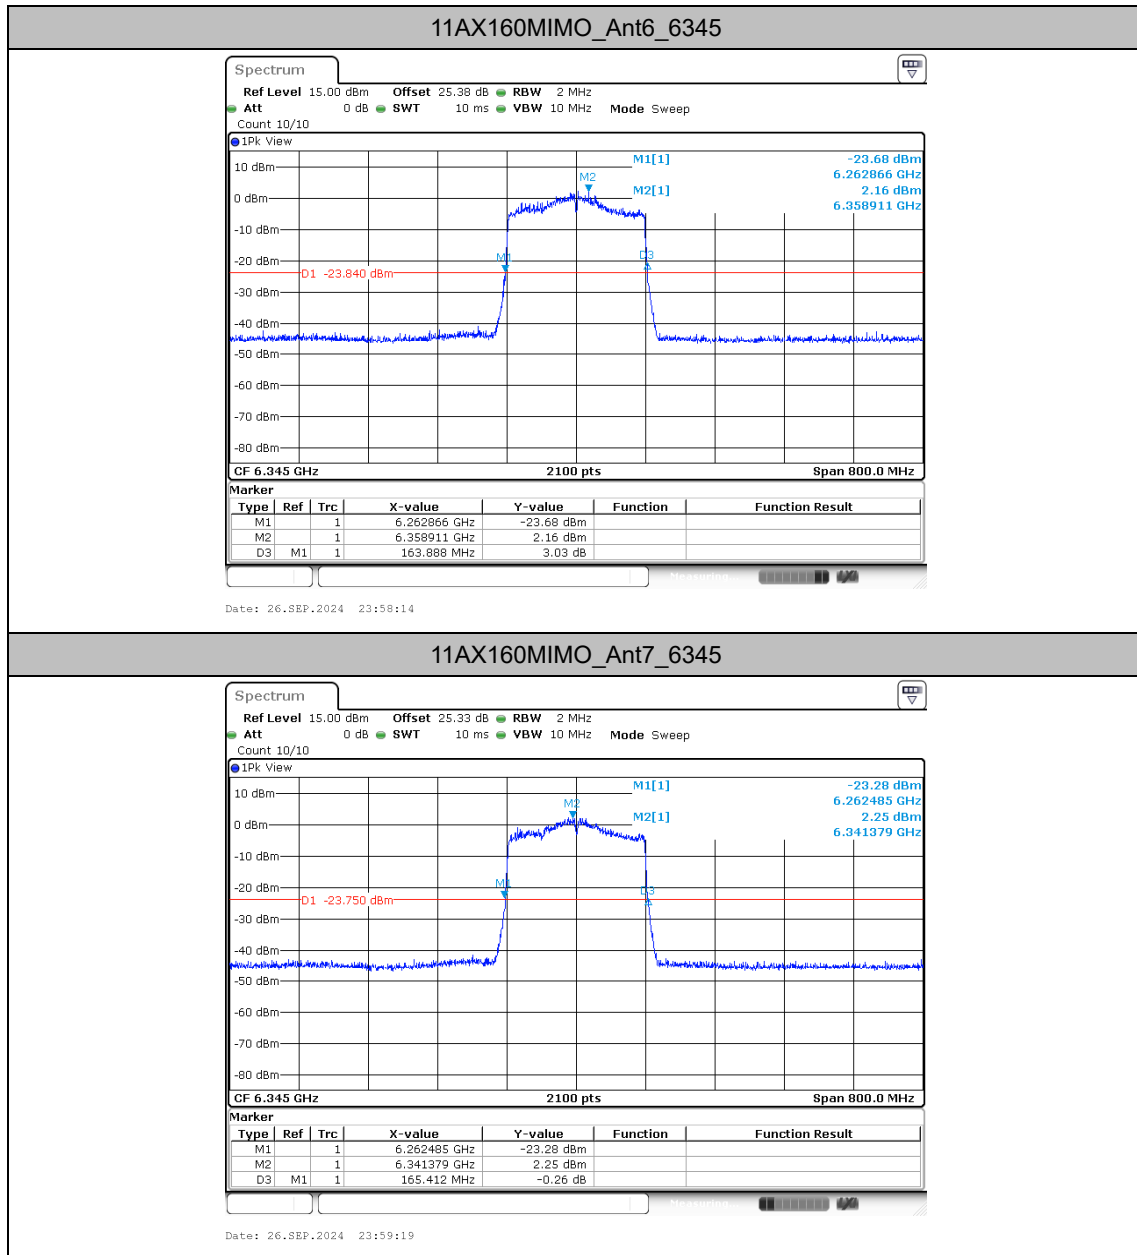




11AX160MIMO_Ant6_6505

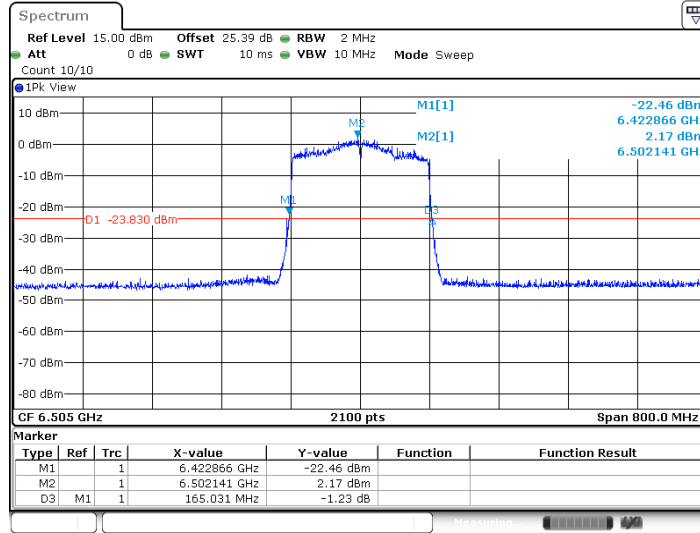

Date: 27.SEP.2024 00:01:21


11AX160MIMO_Ant7_6505

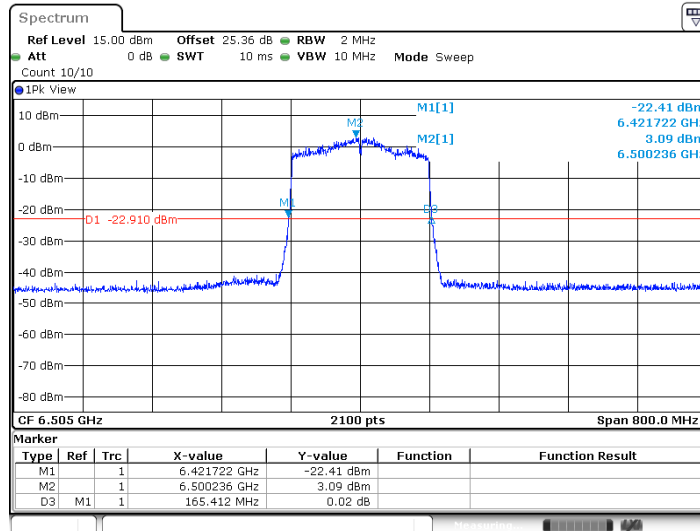

Date: 27.SEP.2024 00:02:24




11AX160MIMO_Ant6_6665

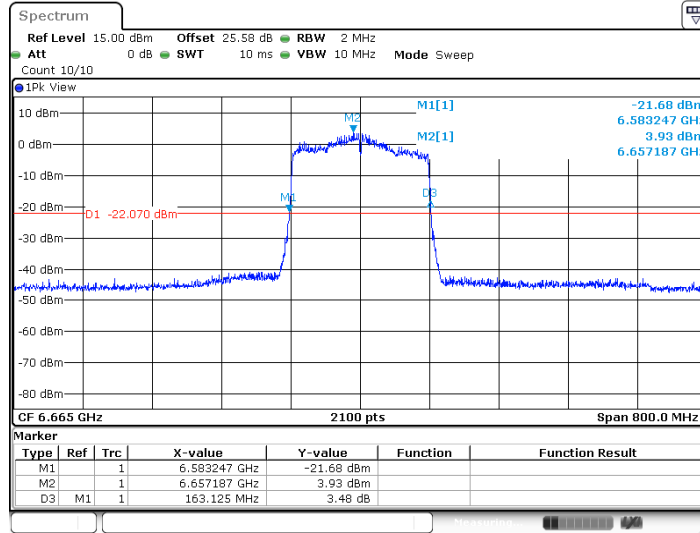

Date: 27.SEP.2024 00:06:41


11AX160MIMO_Ant7_6665

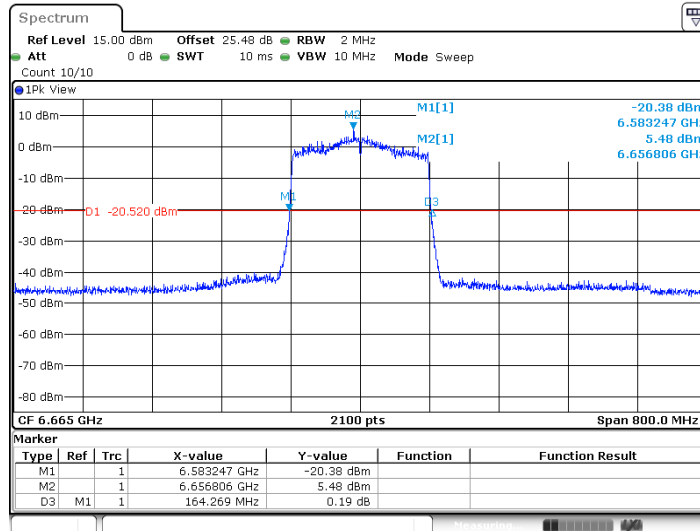


Date: 27.SEP.2024 00:07:46




11AX160MIMO_Ant6_6825

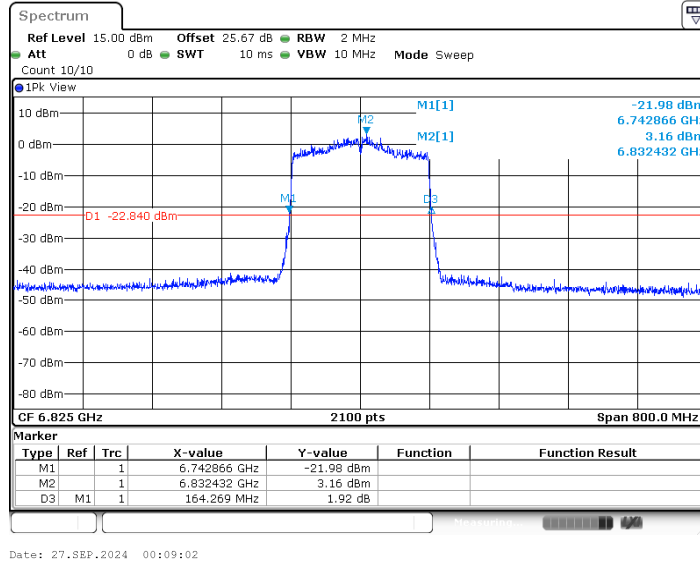

11AX160MIMO_Ant7_6825

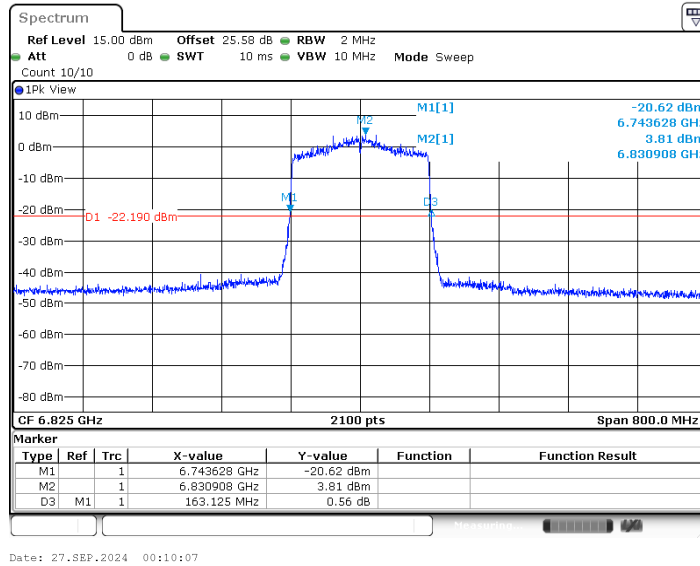

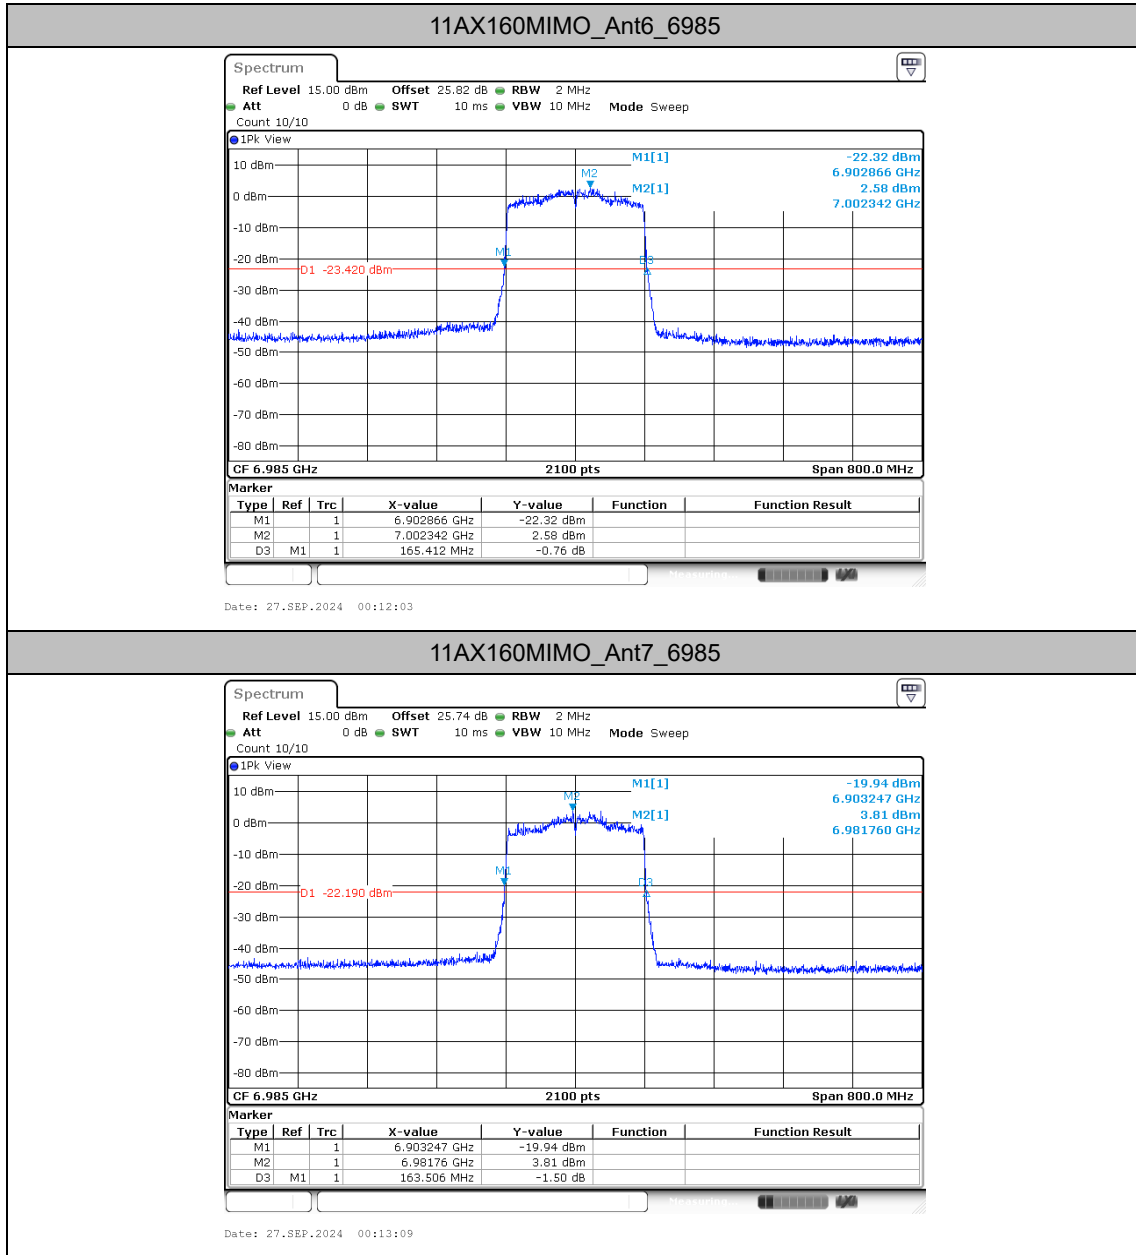



Occupied channel bandwidth

Test Result

TestMode	Antenna	Freq(MHz)	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A-CDD	Ant6	5955	16.533	5946.7619	5963.2952	---	---
	Ant7	5955	16.533	5946.7810	5963.3143	---	---
	Ant6	6175	16.533	6166.7810	6183.3143	---	---
	Ant7	6175	16.533	6166.8000	6183.3333	---	---
	Ant6	6415	16.533	6406.7810	6423.3143	---	---
	Ant7	6415	16.514	6406.8190	6423.3333	---	---
	Ant6	6435	16.533	6426.7429	6443.2762	---	---
	Ant7	6435	16.533	6426.7619	6443.2952	---	---
	Ant6	6475	16.533	6466.7619	6483.2952	---	---
	Ant7	6475	16.533	6466.7810	6483.3143	---	---
	Ant6	6515	16.533	6506.7619	6523.2952	---	---
	Ant7	6515	16.514	6506.8000	6523.3143	---	---
	Ant6	6535	16.533	6526.7429	6543.2762	---	---
	Ant7	6535	16.514	6526.7810	6543.2952	---	---
	Ant6	6695	16.495	6686.7810	6703.2762	---	---
	Ant7	6695	16.495	6686.8000	6703.2952	---	---
	Ant6	6855	16.514	6846.7810	6863.2952	---	---
	Ant7	6855	16.533	6846.7810	6863.3143	---	---
	Ant6	6875	16.533	6866.7619	6883.2952	---	---
	Ant7	6875	16.533	6866.7810	6883.3143	---	---
	Ant6	6895	16.495	6886.7810	6903.2762	---	---
	Ant7	6895	16.495	6886.8000	6903.2952	---	---
	Ant6	6995	16.533	6986.8381	7003.3714	---	---
	Ant7	6995	16.514	6986.8571	7003.3714	---	---
	Ant6	7095	16.514	7086.7810	7103.2952	---	---
	Ant7	7095	16.533	7086.7810	7103.3143	---	---
11AX20MIMO	Ant6	5955	18.895	5945.6000	5964.4952	---	---
	Ant7	5955	18.876	5945.6190	5964.4952	---	---
	Ant6	6175	18.876	6165.6190	6184.4952	---	---
	Ant7	6175	18.876	6165.6190	6184.4952	---	---
	Ant6	6415	18.876	6405.6190	6424.4952	---	---
	Ant7	6415	18.876	6405.6190	6424.4952	---	---
	Ant6	6435	18.895	6425.5810	6444.4762	---	---
	Ant7	6435	18.876	6425.5810	6444.4571	---	---
	Ant6	6475	18.895	6465.6000	6484.4952	---	---
	Ant7	6475	18.857	6465.6190	6484.4762	---	---
	Ant6	6515	18.876	6505.6000	6524.4762	---	---
	Ant7	6515	18.876	6505.6000	6524.4762	---	---
	Ant6	6535	18.876	6525.6000	6544.4762	---	---
	Ant7	6535	18.857	6525.6190	6544.4762	---	---
	Ant6	6695	18.876	6685.6000	6704.4762	---	---
	Ant7	6695	18.838	6685.6190	6704.4571	---	---
	Ant6	6855	18.895	6845.6000	6864.4952	---	---
	Ant7	6855	18.876	6845.6000	6864.4762	---	---




	Ant6	6875	18.876	6865.6000	6884.4762	---	---
	Ant7	6875	18.895	6865.5810	6884.4762	---	---
	Ant6	6895	18.876	6885.6000	6904.4762	---	---
	Ant7	6895	18.857	6885.6000	6904.4571	---	---
	Ant6	6995	18.914	6985.6381	7004.5524	---	---
	Ant7	6995	18.895	6985.6381	7004.5333	---	---
	Ant6	7095	18.876	7085.6190	7104.4952	---	---
	Ant7	7095	18.876	7085.6190	7104.4952	---	---
11AX40MIMO	Ant6	5965	37.714	5946.1619	5983.8762	---	---
	Ant7	5965	37.714	5946.2000	5983.9143	---	---
	Ant6	6165	37.752	6146.1619	6183.9143	---	---
	Ant7	6165	37.79	6146.1619	6183.9524	---	---
	Ant6	6405	37.79	6386.1238	6423.9143	---	---
	Ant7	6405	37.79	6386.1238	6423.9143	---	---
	Ant6	6445	37.714	6426.1238	6463.8381	---	---
	Ant7	6445	37.752	6426.1238	6463.8762	---	---
	Ant6	6485	37.714	6466.1619	6503.8762	---	---
	Ant7	6485	37.714	6466.1619	6503.8762	---	---
	Ant6	6525	37.676	6506.1619	6543.8381	---	---
	Ant7	6525	37.676	6506.1619	6543.8381	---	---
	Ant6	6565	37.676	6546.1619	6583.8381	---	---
	Ant7	6565	37.676	6546.1619	6583.8381	---	---
	Ant6	6685	37.714	6666.1619	6703.8762	---	---
	Ant7	6685	37.714	6666.1238	6703.8381	---	---
	Ant6	6845	37.752	6826.1619	6863.9143	---	---
	Ant7	6845	37.714	6826.1619	6863.8762	---	---
	Ant6	6885	37.714	6866.1619	6903.8762	---	---
	Ant7	6885	37.714	6866.1619	6903.8762	---	---
	Ant6	6925	37.676	6906.2000	6943.8762	---	---
	Ant7	6925	37.714	6906.1619	6943.8762	---	---
	Ant6	6965	37.676	6946.2000	6983.8762	---	---
	Ant7	6965	37.676	6946.1619	6983.8381	---	---
	Ant6	7085	37.714	7066.1619	7103.8762	---	---
	Ant7	7085	37.714	7066.1619	7103.8762	---	---
11AX80MIMO	Ant6	5985	76.724	5946.6381	6023.3619	---	---
	Ant7	5985	76.8	5946.6381	6023.4381	---	---
	Ant6	6145	76.876	6106.5619	6183.4381	---	---
	Ant7	6145	76.8	6106.7143	6183.5143	---	---
	Ant6	6385	76.876	6346.4857	6423.3619	---	---
	Ant7	6385	76.952	6346.5619	6423.5143	---	---
	Ant6	6465	76.876	6426.4857	6503.3619	---	---
	Ant7	6465	76.952	6426.4857	6503.4381	---	---
	Ant6	6545	76.8	6506.5619	6583.3619	---	---
	Ant7	6545	76.648	6506.6381	6583.2857	---	---
	Ant6	6625	76.876	6586.4857	6663.3619	---	---
	Ant7	6625	76.8	6586.5619	6663.3619	---	---
	Ant6	6705	76.876	6666.4857	6743.3619	---	---
	Ant7	6705	76.876	6666.4095	6743.2857	---	---
	Ant6	6785	76.648	6746.7143	6823.3619	---	---
	Ant7	6785	76.724	6746.7143	6823.4381	---	---



	Ant6	6865	76.8	6826.6381	6903.4381	---	---
	Ant7	6865	76.8	6826.6381	6903.4381	---	---
	Ant6	6945	76.571	6906.7143	6983.2857	---	---
	Ant7	6945	76.648	6906.5619	6983.2095	---	---
	Ant6	7025	76.571	6986.9429	7063.5143	---	---
	Ant7	7025	76.343	6986.9429	7063.2857	---	---
11AX160MIMO	Ant6	6025	156.038	5946.7524	6102.7905	---	---
	Ant7	6025	156.19	5946.7524	6102.9429	---	---
	Ant6	6185	156.19	6106.6000	6262.7905	---	---
	Ant7	6185	156.343	6106.6000	6262.9429	---	---
	Ant6	6345	156.19	6266.9048	6423.0952	---	---
	Ant7	6345	156.343	6267.0571	6423.4000	---	---
	Ant6	6505	156.19	6426.7524	6582.9429	---	---
	Ant7	6505	156.343	6426.7524	6583.0952	---	---
	Ant6	6665	155.886	6586.7524	6742.6381	---	---
	Ant7	6665	156.038	6586.9048	6742.9429	---	---
	Ant6	6825	156.038	6746.9048	6902.9429	---	---
	Ant7	6825	156.038	6747.2095	6903.2476	---	---
	Ant6	6985	156.495	6906.9048	7063.4000	---	---
	Ant7	6985	156.19	6907.2095	7063.4000	---	---




Test Graphs

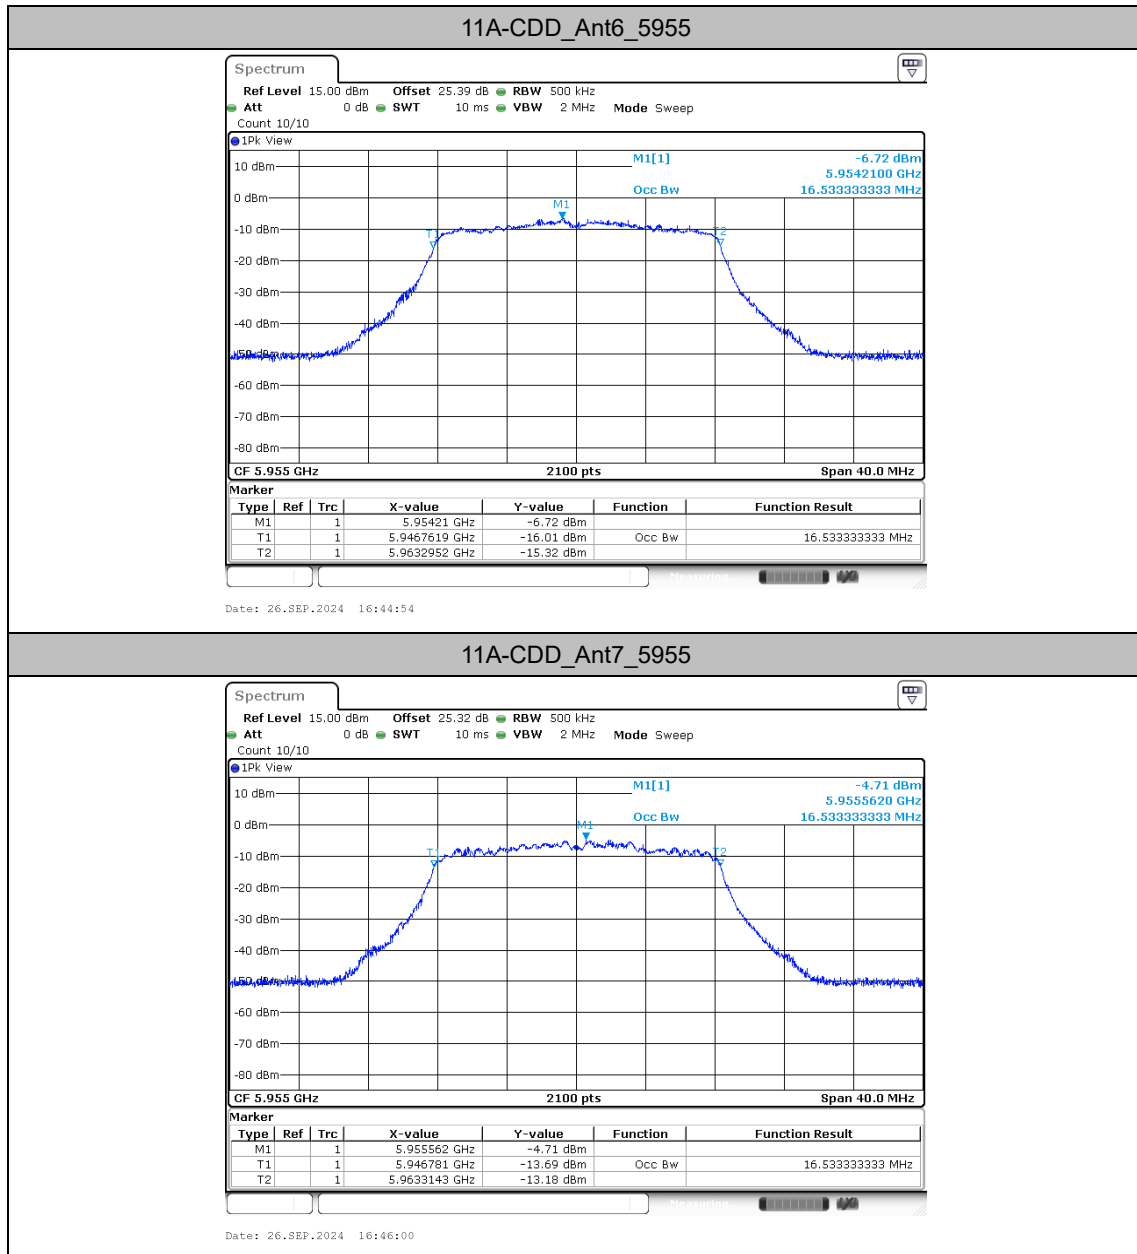




11A-CDD_Ant6_6175

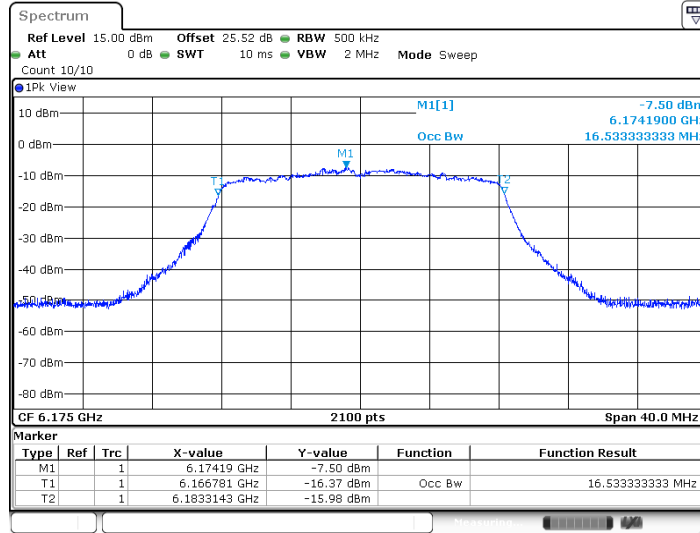

Date: 26.SEP.2024 16:50:37


11A-CDD_Ant7_6175

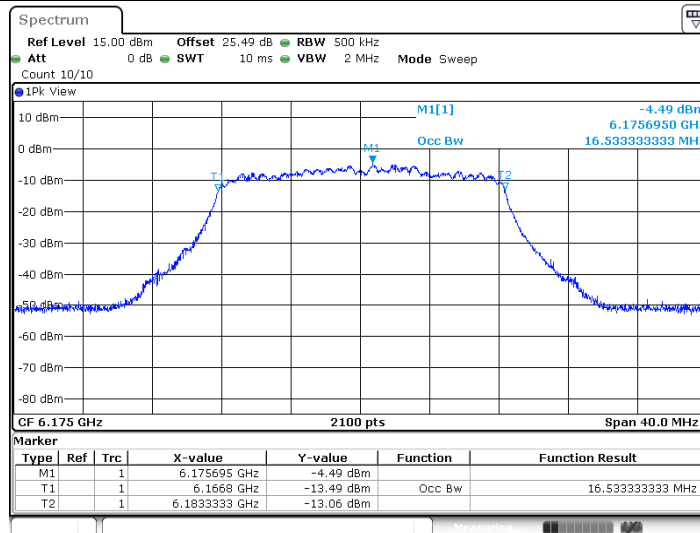


Date: 26.SEP.2024 16:51:43



11A-CDD_Ant6_6415

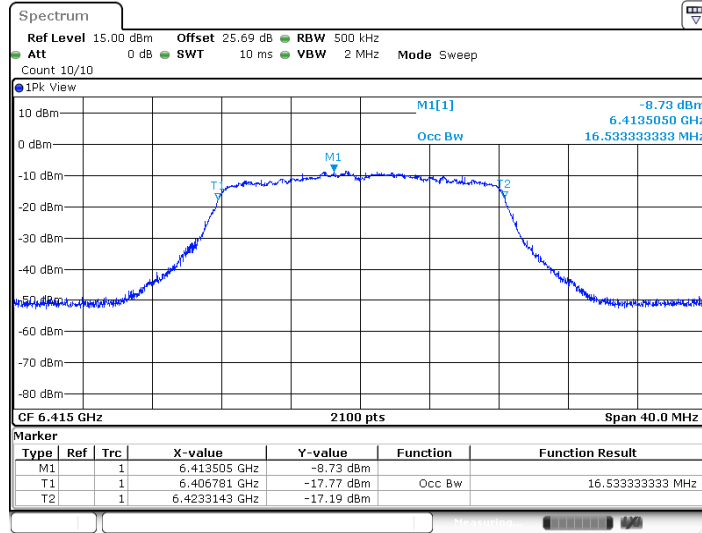


11A-CDD_Ant7_6415

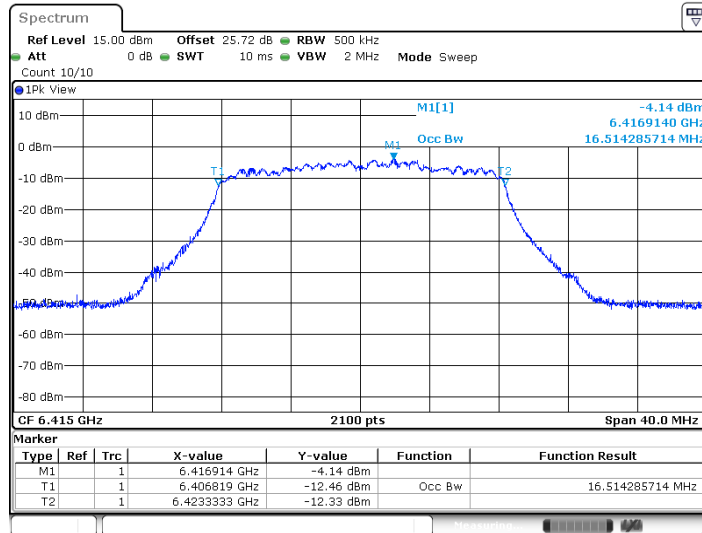




11A-CDD_Ant6_6435

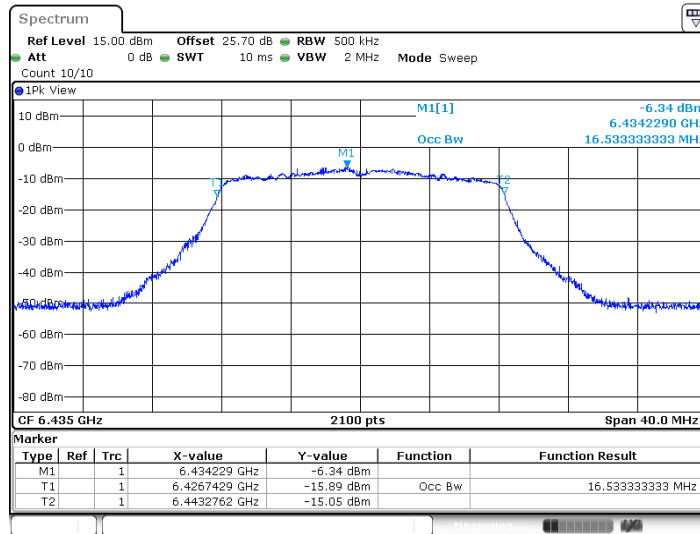

Date: 26.SEP.2024 17:08:48

11A-CDD_Ant7_6435

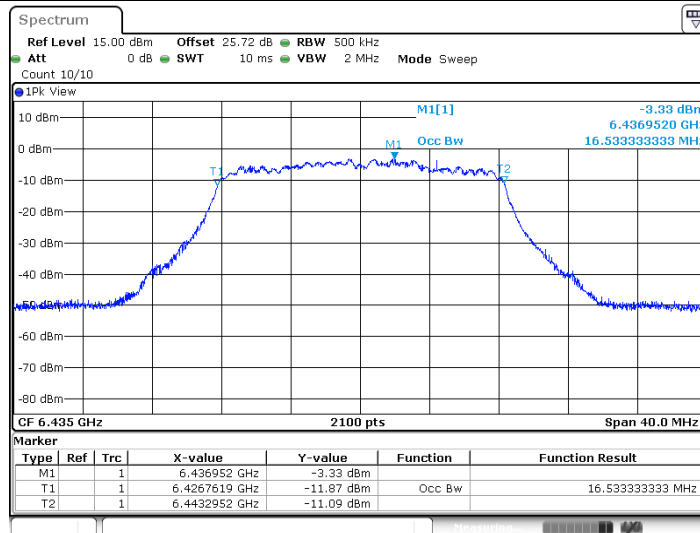

Date: 26.SEP.2024 17:09:53