



FCC RF Test Report

APPLICANT : Honeywell International Inc.
Honeywell Safety and Productivity Solutions
EQUIPMENT : DOLPHIN CT40
BRAND NAME : Honeywell
MODEL NAME : CT40-L1N
FCC ID : HD5-CT40L1N
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System

The product was received on May 04, 2018 and testing was completed on Jul. 06, 2018. We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.



Approved by: James Huang / Manager

Sporton International (Kunshan) Inc.
No. 1098, Pengxi North Road, Kunshan Economic Development Zone,
Jiangsu Province 215335, China



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION.....	5
1.1 Applicant.....	5
1.2 Manufacturer.....	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	6
1.5 Modification of EUT	6
1.6 Testing Location	6
1.7 Applicable Standards.....	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....	8
2.1 Carrier Frequency Channel	8
2.2 Test Mode.....	9
2.3 Connection Diagram of Test System.....	10
2.4 Support Unit used in test configuration and system	10
2.5 EUT Operation Test Setup	11
2.6 Measurement Results Explanation Example.....	11
3 TEST RESULT	12
3.1 6dB and 99% Bandwidth Measurement	12
3.2 Output Power Measurement.....	19
3.3 Power Spectral Density Measurement	20
3.4 Conducted Band Edges and Spurious Emission Measurement	27
3.5 Radiated Band Edges and Spurious Emission Measurement	36
3.6 AC Conducted Emission Measurement.....	40
3.7 Antenna Requirements.....	42
4 LIST OF MEASURING EQUIPMENT.....	43
5 UNCERTAINTY OF EVALUATION.....	44
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX C. RADIATED SPURIOUS EMISSION	
APPENDIX D. DUTY CYCLE PLOTS	
APPENDIX E. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR850409B	Rev. 01	Initial issue of report	Nov. 13, 2018



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	99% Bandwidth	-	Pass	-
3.2	15.247(b)(3)	Peak Output Power	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	$\leq 20\text{dBc}$	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 9.92 dB at 45.52 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 17.91 dB at 0.481 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-



1 General Description

1.1 Applicant

Honeywell International Inc.
Honeywell Safety and Productivity Solutions
9680 Old Bailes Rd. Fort Mill, SC 29707 United States

1.2 Manufacturer

Honeywell International Inc.
Honeywell Safety and Productivity Solutions
9680 Old Bailes Rd. Fort Mill, SC 29707 United States

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	DOLPHIN CT40
Brand Name	Honeywell
Model Name	CT40-L1N
FCC ID	HD5-CT40L1N
EUT supports Radios application	CDMA/EV-DO/GSM/GPRS/EGPRS/WCDMA/HSPA/DC-H SDPA/ HSPA+(16QAM uplink is not supported)/LTE/NFC WLAN 2.4GHz 802.11b/g/n HT20/ WLAN 5GHz 802.11a/n HT20/HT40/ WLAN 5GHz 802.11ac VHT20/VHT40/VHT80/ Bluetooth BR EDR / LE
IMEI Code	Conducted: 990011960007085/990011960007001 Conduction: 990011960006541 Radiation: 990011960006061/990011960006001 990011960006061/990011960006002
HW Version	V1.0
SW Version	OS.01.010-HON.01.102
EUT Stage	Identical Prototype

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. There are two samples, the difference is the scanner from different suppliers, the difference has no influence on RF features, only sample 1 is assessed to perform full test.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	40
Carrier Frequency of Each Channel	40 Channel(37 hopping + 3 advertising channel)
Maximum Output Power to Antenna	Bluetooth LE v4.0 -0.32 dBm (0.0009 W) Bluetooth LE v5.0 -0.27 dBm (0.0009 W)
99% Occupied Bandwidth	Bluetooth LE v4.0 1.02MHz Bluetooth LE v5.0 2.03MHz
Antenna Type / Gain	IFA Antenna with gain 1.90 dBi
Type of Modulation	Bluetooth LE : GFSK

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton International (Kunshan) Inc. is accredited to ISO 17025 by National Voluntary Laboratory Accreditation Program (NVLAP code: 600155-0) and the FCC designation No. is CN5013.

Test Site	Sporton International (Kunshan) Inc.			
Test Site Location	No.3-2 Ping-Xiang Rd, Kunshan Development Zone Kunshan City Jiangsu Province 215335 China TEL : +86-512-57900158 FAX : +86-512-57900958			
Test Site No.	Sporton Site No.			FCC Test Firm Registration No.
	TH01-KS	03CH02-KS	CO01-KS	630927



1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v05
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
	20	2442	-	-


2.2 Test Mode

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	Data Rate / Modulation
	Bluetooth – LE / GFSK
Conducted TCs	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
Radiated TCs	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
AC Conducted Emission	Mode 1: GSM 850 Idle + Bluetooth Link + WLAN Link (2.4G) + USB Cradle (Charging from Adapter)
Remark: For Radiated Test Cases, The tests were performance with Adapter.	

2.3 Connection Diagram of Test System

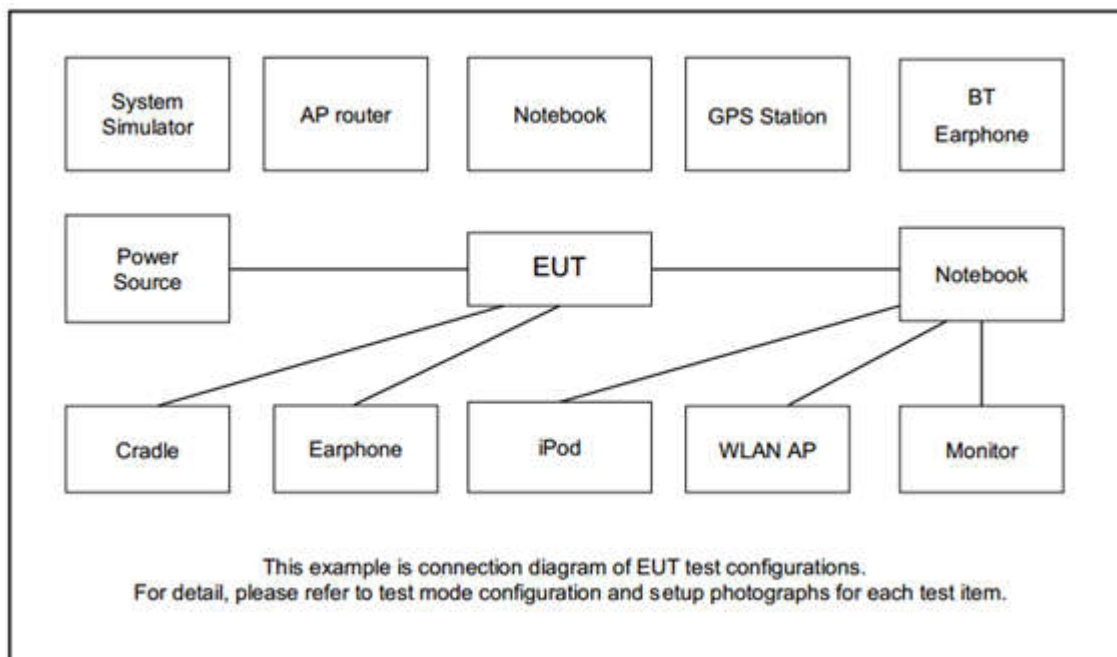

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8m
2.	WLAN AP	D-Link	DIR-855	KA2DIR855A2		Unshielded, 1.8m
3.	Notebook	Lenovo	G480	PRC4	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
4.	Bluetooth Earphone	Lenovo	LBH308	N/A	N/A	N/A
5.	SD Card	Kingston	8GB	N/A	N/A	N/A

2.5 EUT Operation Test Setup

For Bluetooth LE function, the engineering test program was provided and enabled to make EUT continuous transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss r.

Following shows an offset computation example with cable loss 5.4dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)}. \\ &= 5.4 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.1.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v05.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 30kHz and set the Video bandwidth (VBW) = 100kHz.
6. Measure and record the results in the test report.

3.1.4 Test Setup

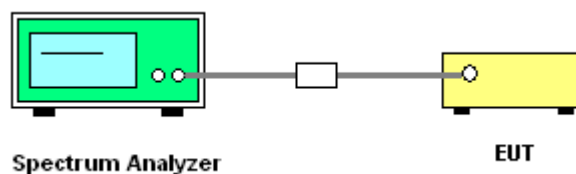




3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.


For Bluetooth LE v4.0

6 dB Bandwidth Plot on Channel 00

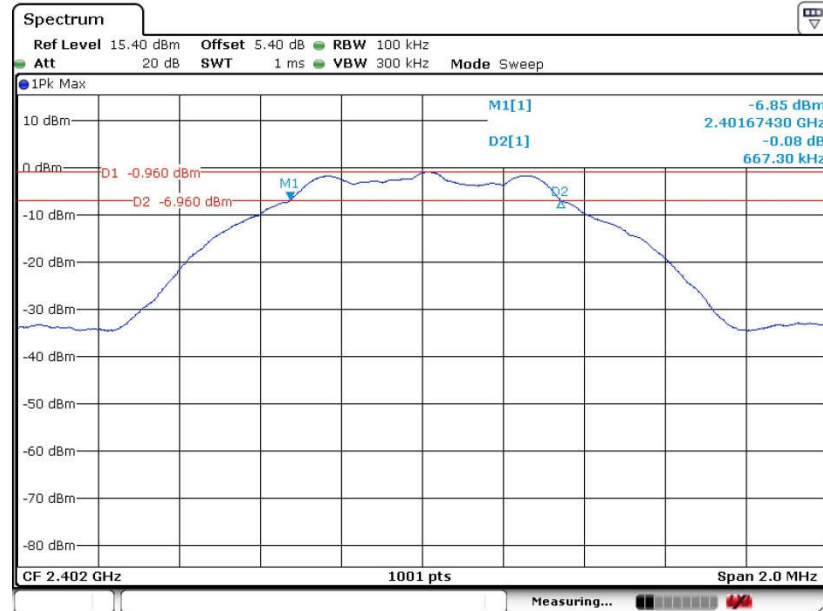

Date: 9 JUN 2018 12:35:38


6 dB Bandwidth Plot on Channel 19

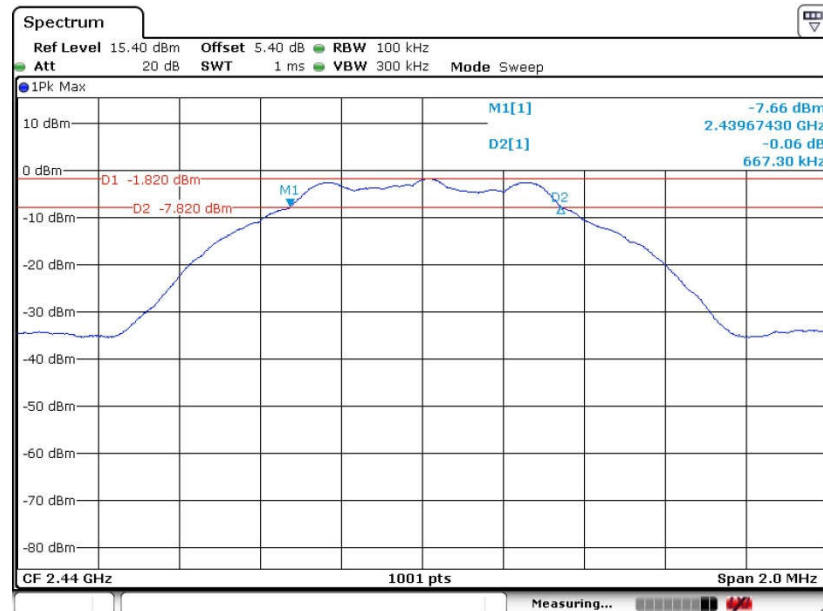

Date: 9 JUN 2018 12:41:57




6 dB Bandwidth Plot on Channel 39

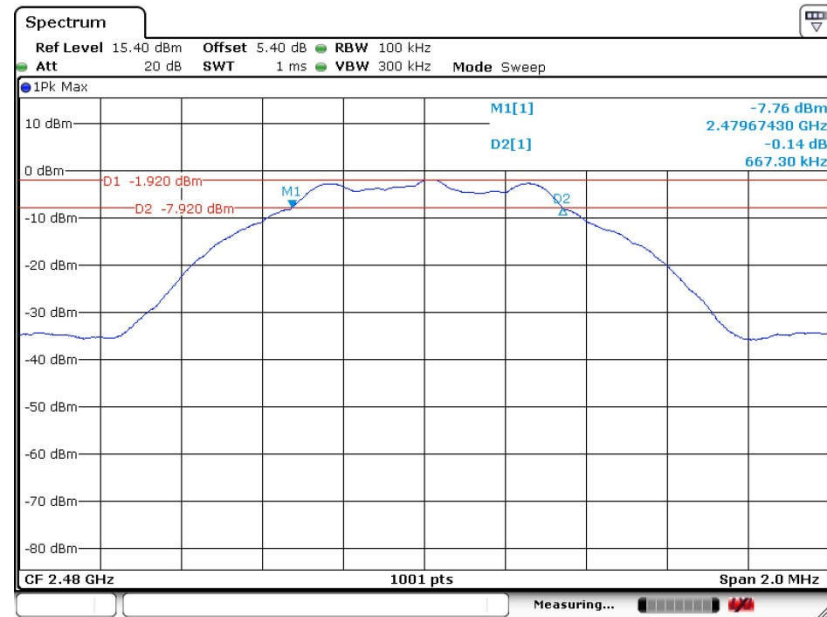

Date: 9 JUN 2018 13:26:06

For Bluetooth LE v5.0


6 dB Bandwidth Plot on Channel 00

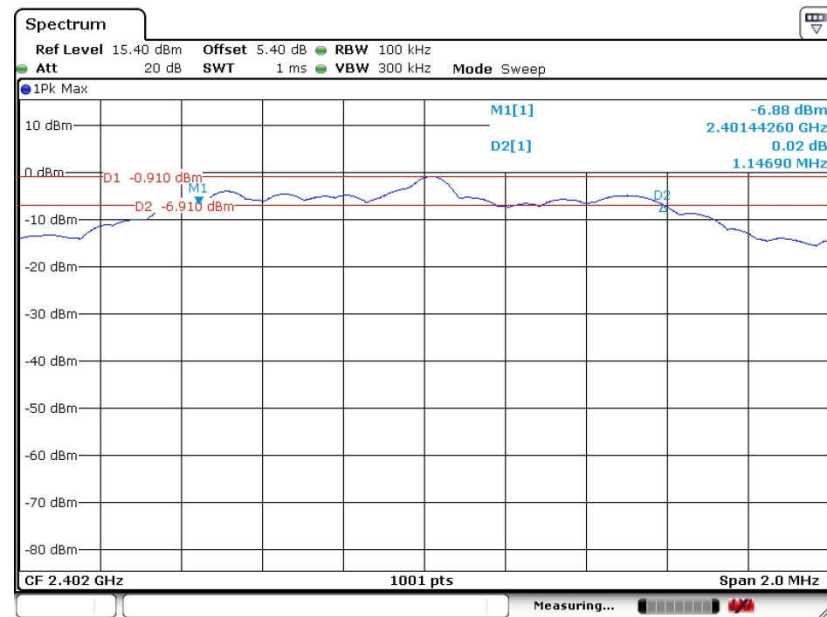

Date: 9 JUN 2018 13:58:25




6 dB Bandwidth Plot on Channel 19

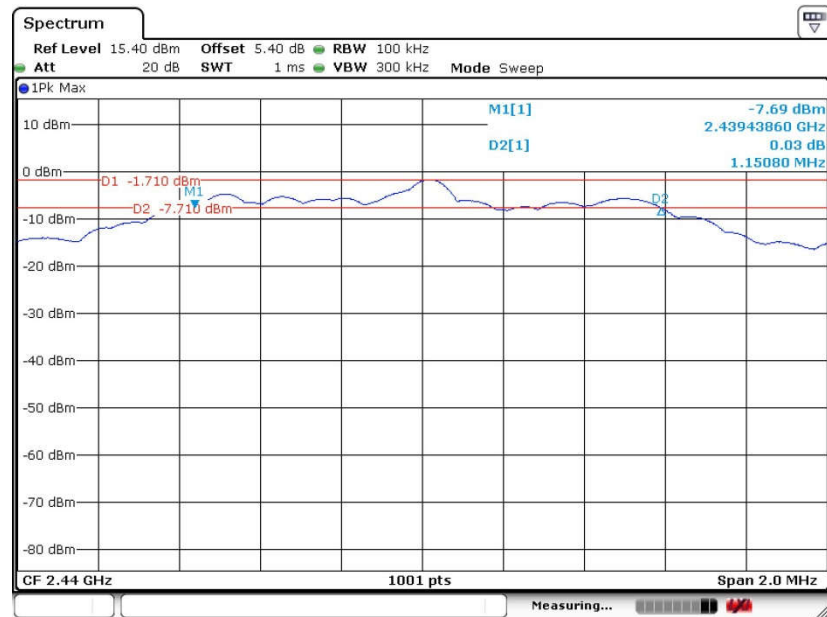

Date: 9 JUN 2018 14:24:21

6 dB Bandwidth Plot on Channel 39

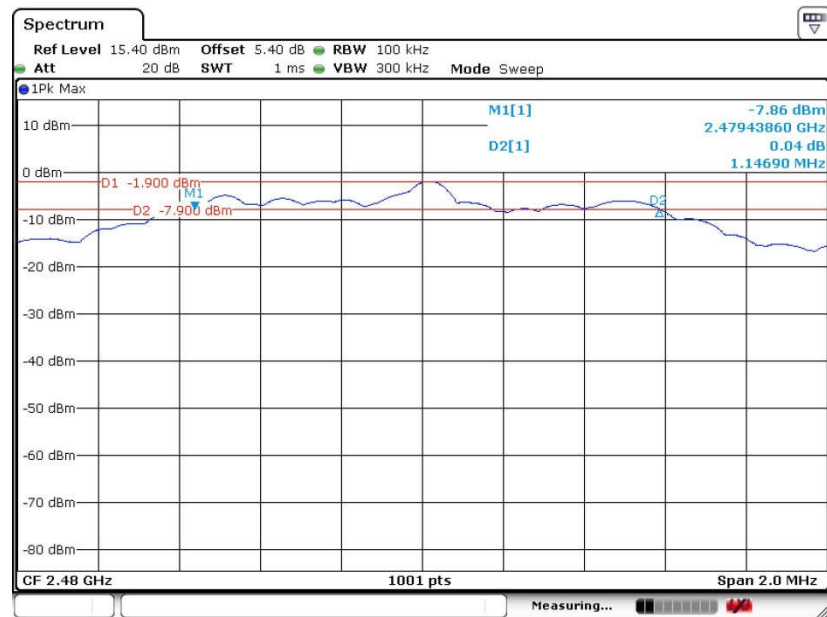

Date: 9 JUN 2018 14:30:38




3.1.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.


For Bluetooth LE v4.0

99% Bandwidth Plot on Channel 00

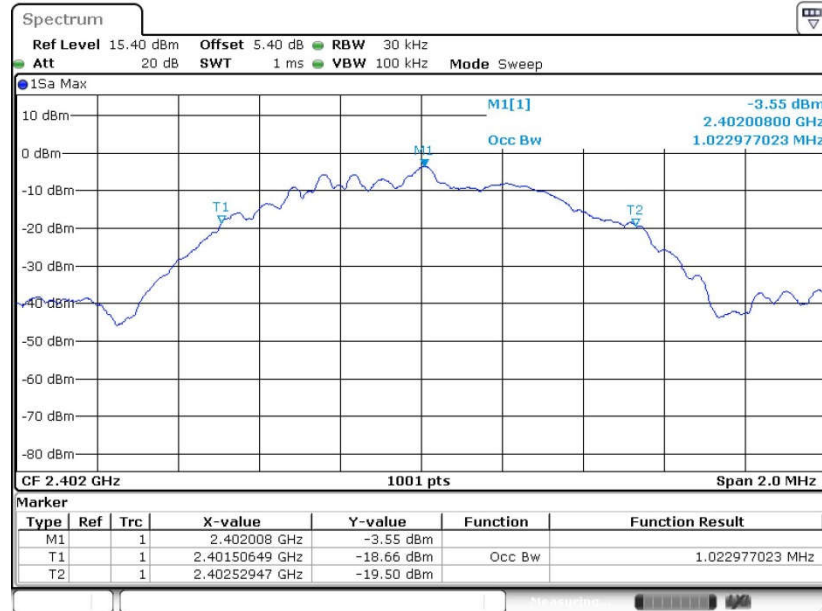

Date: 9 JUN 2018 12:40:02


99% Occupied Bandwidth Plot on Channel 19

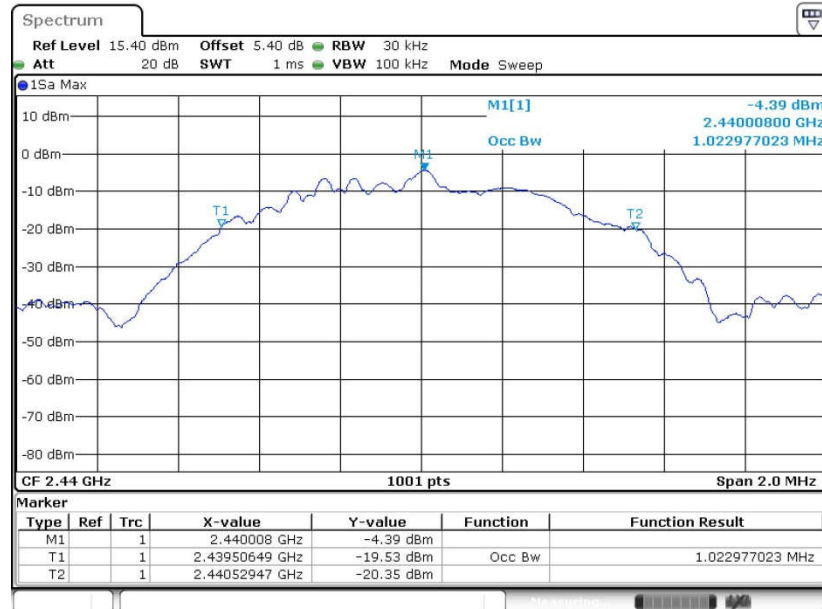

Date: 9 JUN 2018 12:52:07




99% Occupied Bandwidth Plot on Channel 39

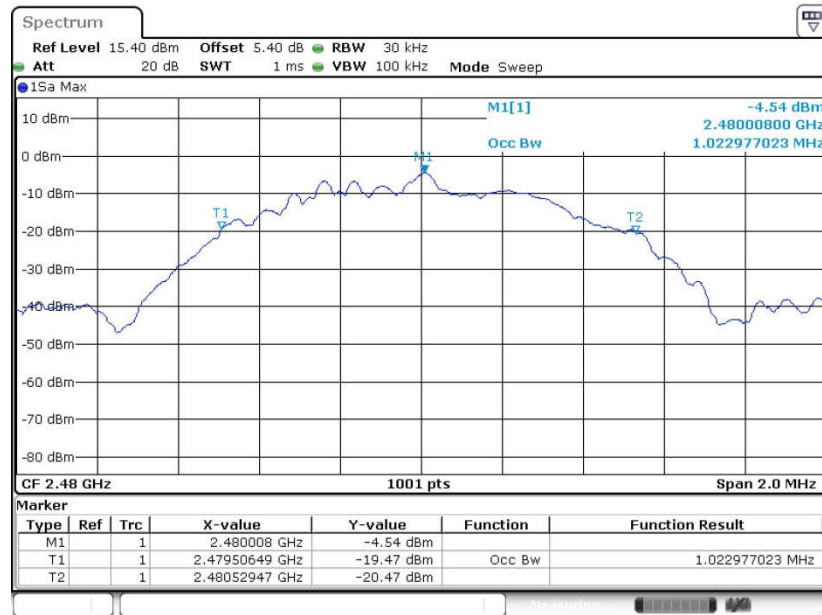


For Bluetooth LE v5.0

99% Bandwidth Plot on Channel 00

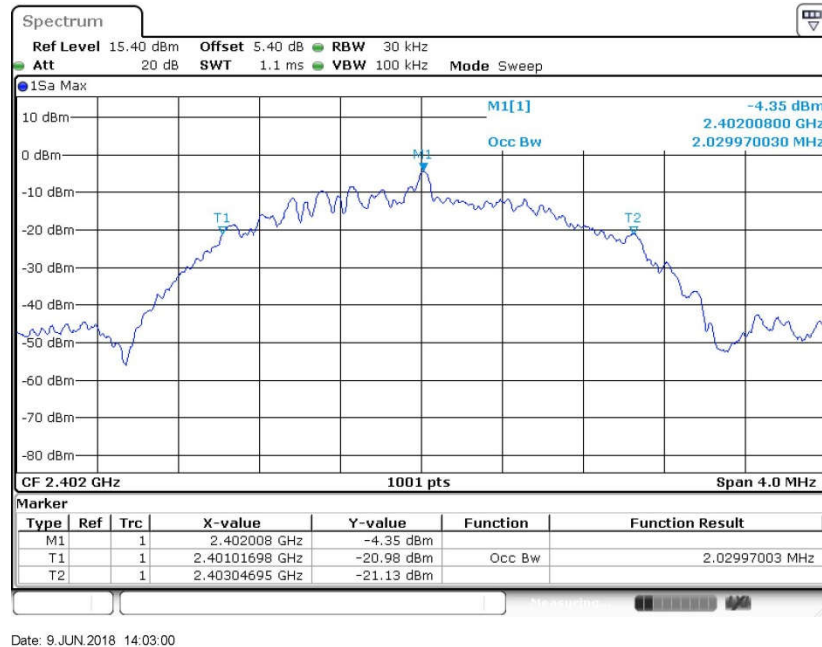




99% Occupied Bandwidth Plot on Channel 19

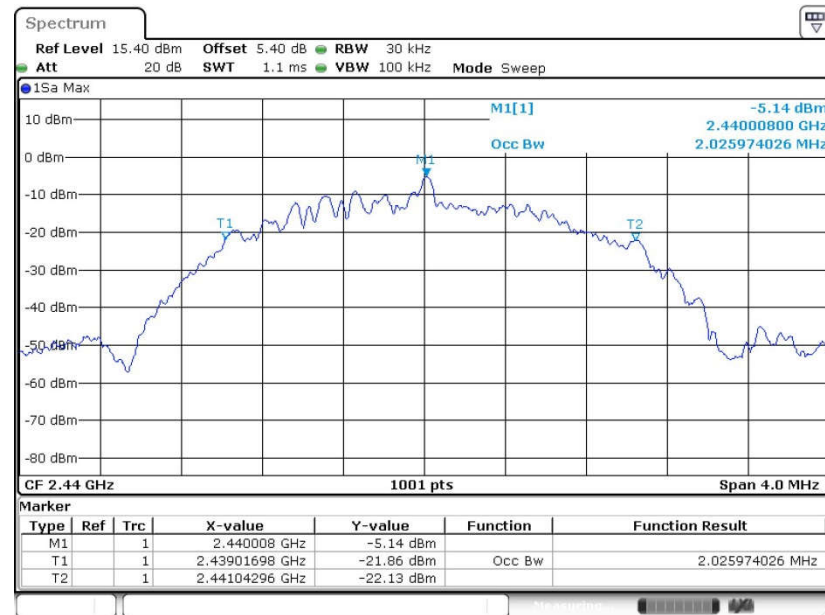

Date: 9 JUN 2018 14:27:53

99% Occupied Bandwidth Plot on Channel 39

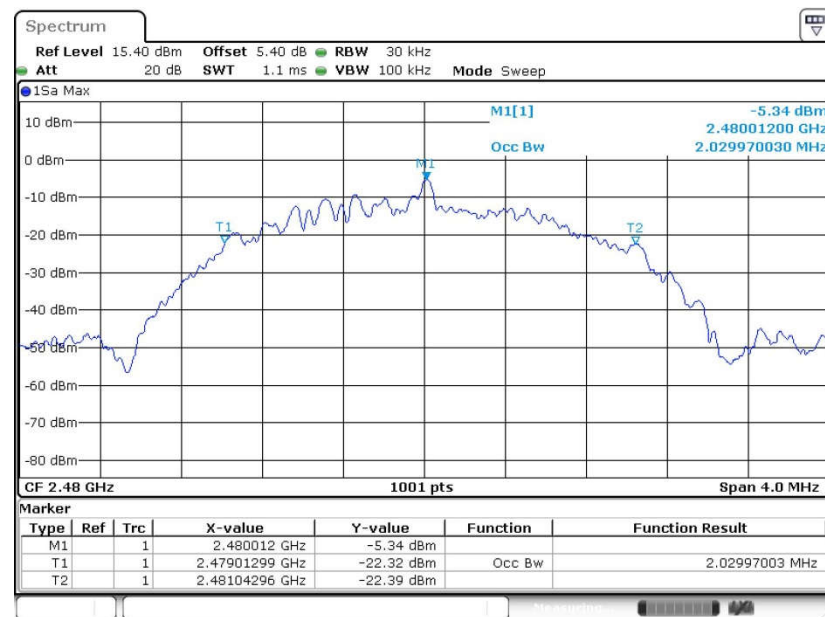

Date: 9 JUN 2018 14:34:25

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v05 section 9.1.3 PKPM1 Peak power meter method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

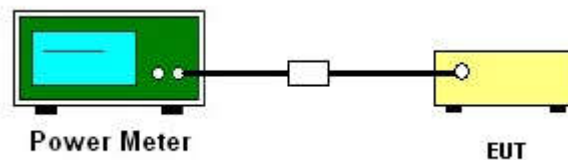

3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.2.6 Test Result of Average Output Power (Reporting Only)

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v05
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup

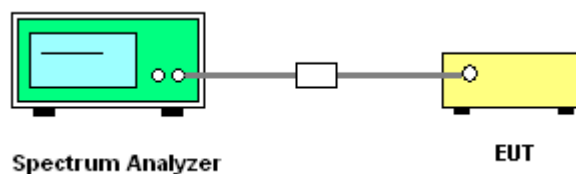

3.3.5 Test Result of Power Spectral Density


Please refer to Appendix A.



3.3.6 Test Result of Power Spectral Density Plots (100kHz)


For Bluetooth LE v4.0

PSD 100kHz Plot on Channel 00

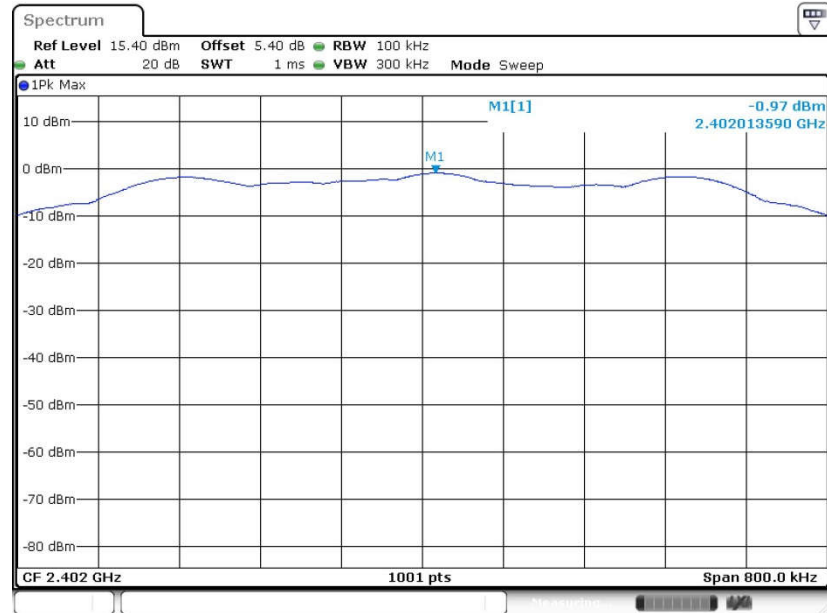

Date: 9 JUN 2018 12:37:04


PSD 100kHz Plot on Channel 19

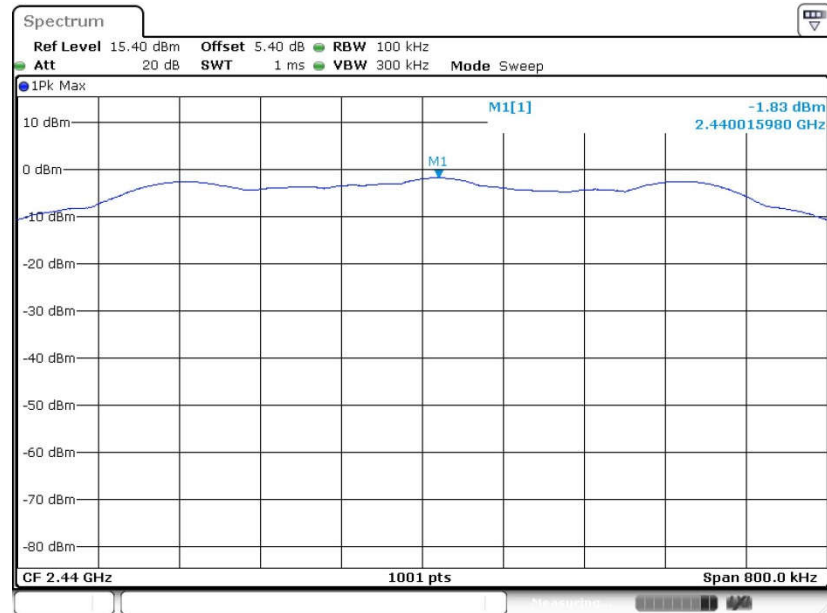

Date: 9 JUN 2018 12:42:54




PSD 100kHz Plot on Channel 39

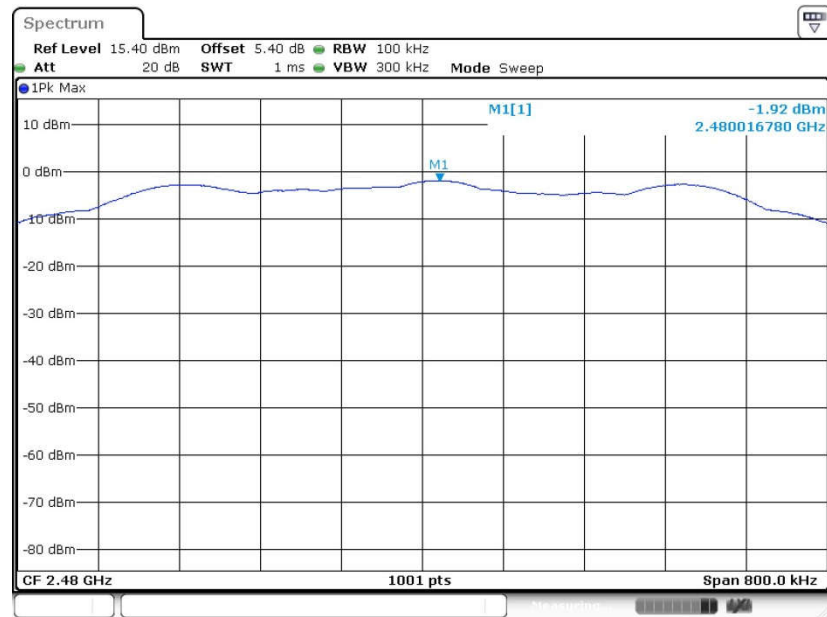

Date: 9 JUN 2018 13:27:42

For Bluetooth LE v5.0


PSD 100kHz Plot on Channel 00

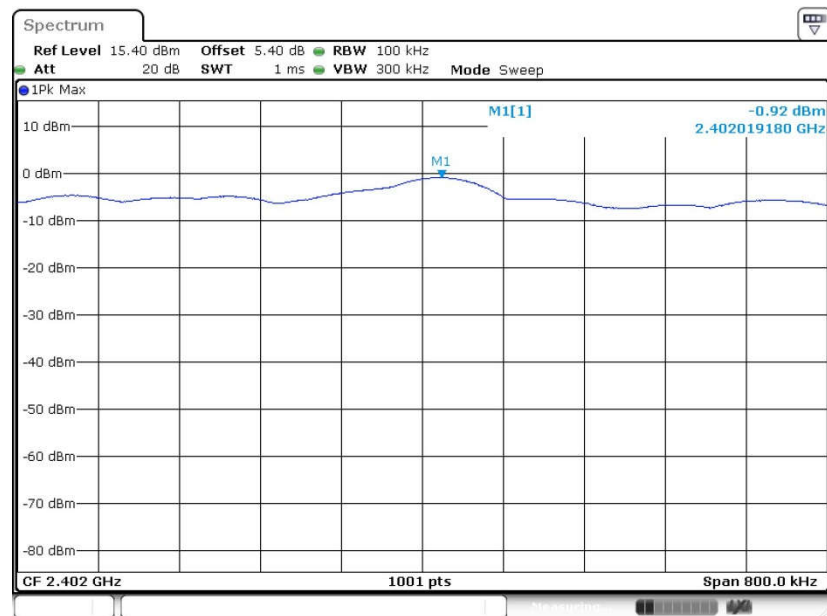

Date: 9 JUN 2018 13:57:55




PSD 100kHz Plot on Channel 19

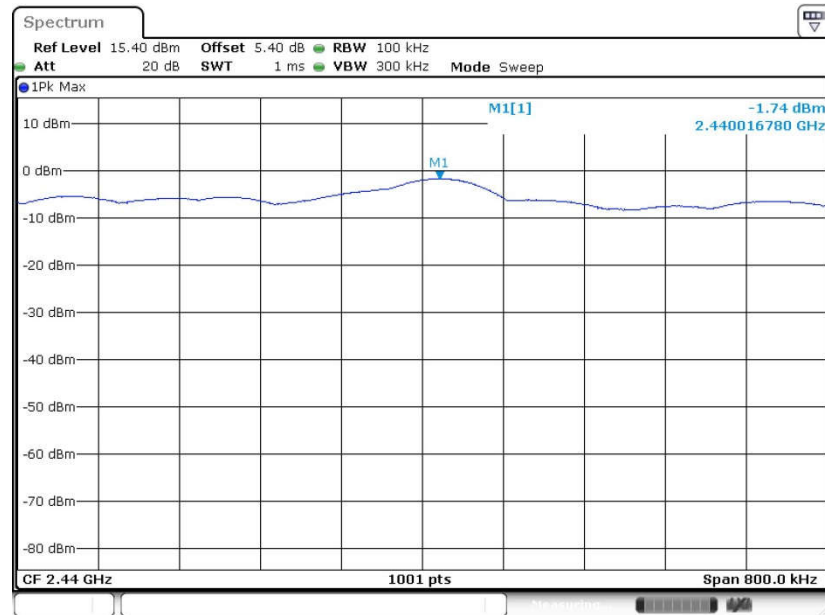

Date: 9 JUN 2018 14:25:08

PSD 100kHz Plot on Channel 39

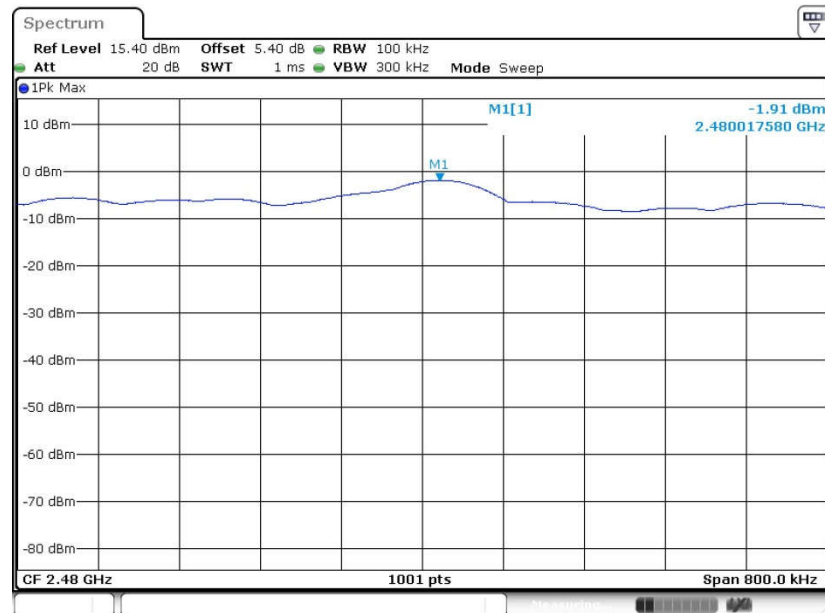


Date: 9 JUN 2018 14:32:27



3.3.7 Test Result of Power Spectral Density Plots (3kHz)


For Bluetooth LE v4.0

PSD 3kHz Plot on Channel 00

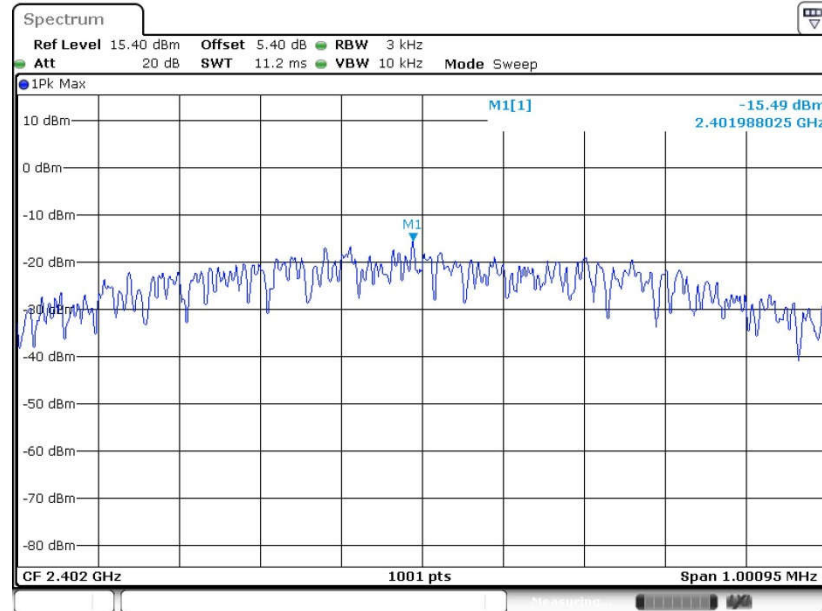

Date: 9 JUN 2018 12:36:10


PSD 3kHz Plot on Channel 19

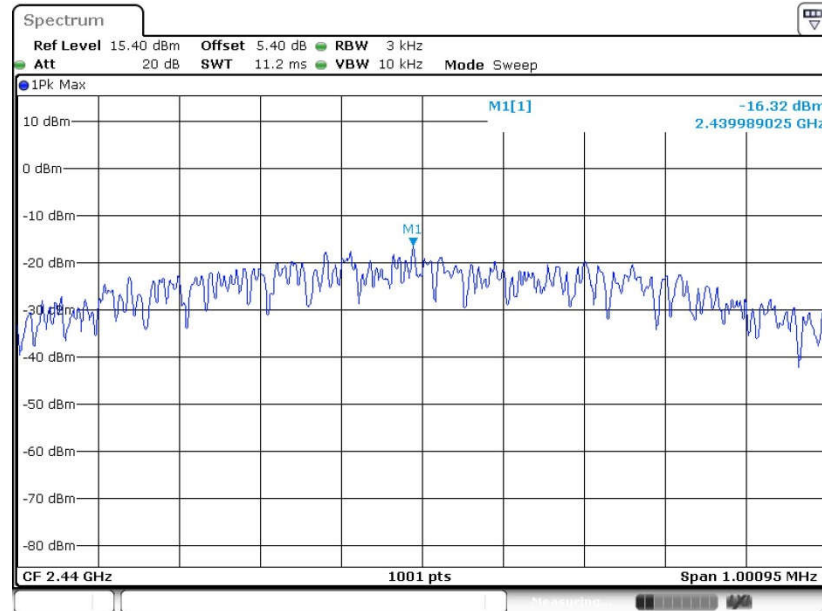

Date: 9 JUN 2018 12:42:26




PSD 3kHz Plot on Channel 39

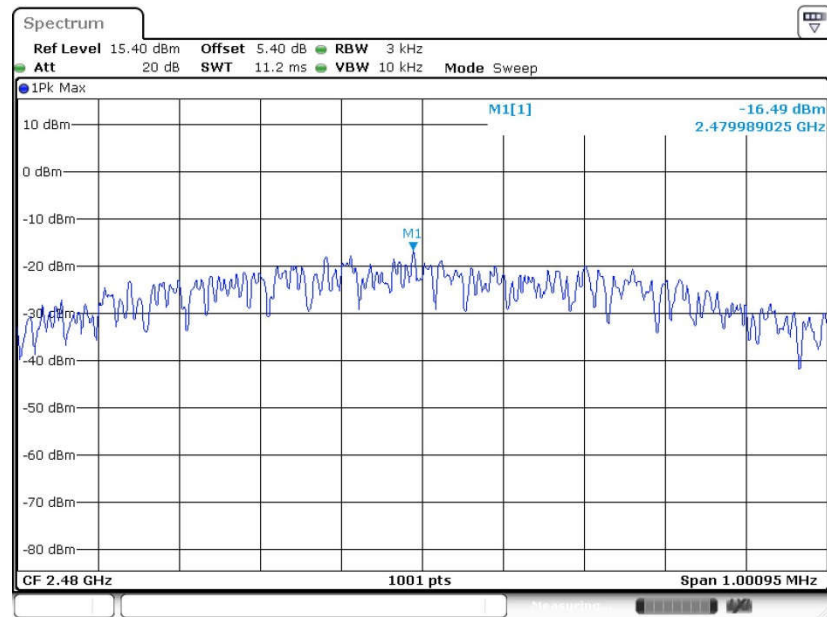

Date: 9 JUN 2018 13:26:36

For Bluetooth LE v5.0


PSD 3kHz Plot on Channel 00

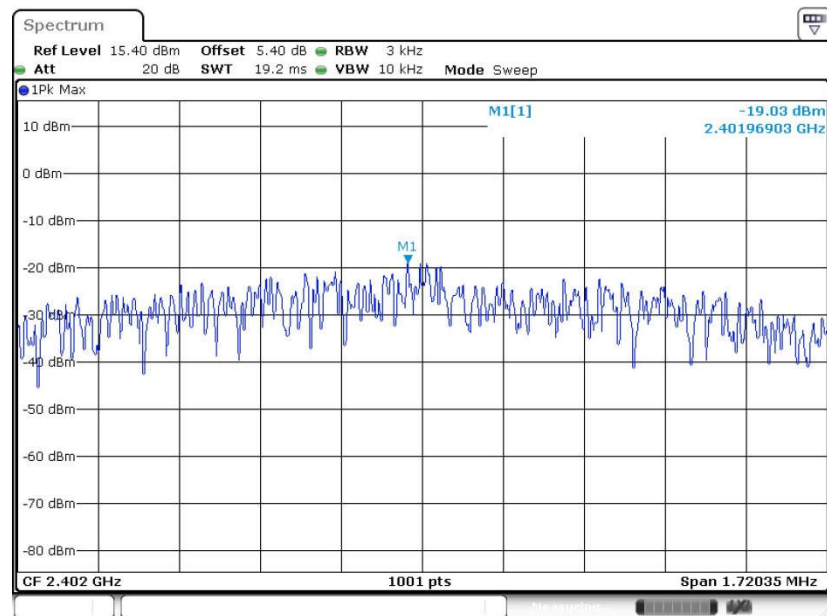

Date: 9 JUN 2018 13:57:35




PSD 3kHz Plot on Channel 19

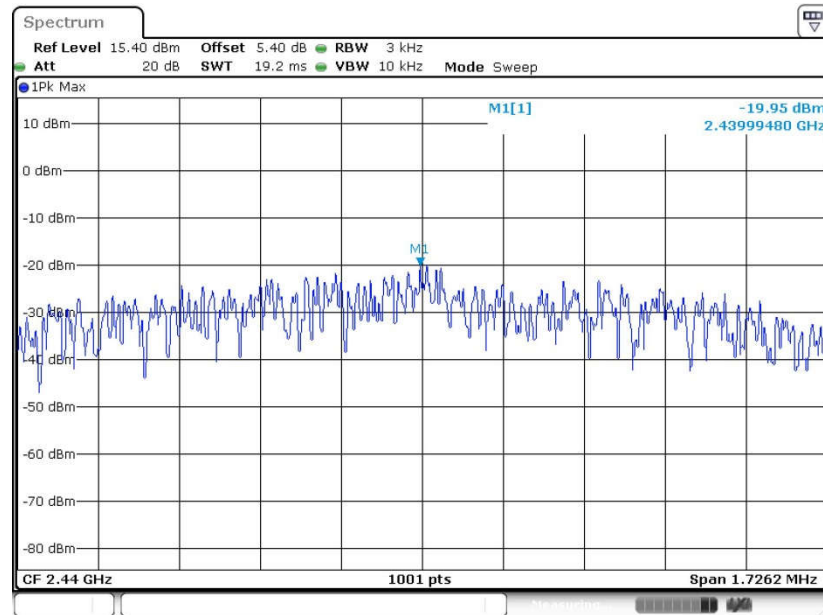

Date: 9 JUN 2018 14:24:51

PSD 3kHz Plot on Channel 39

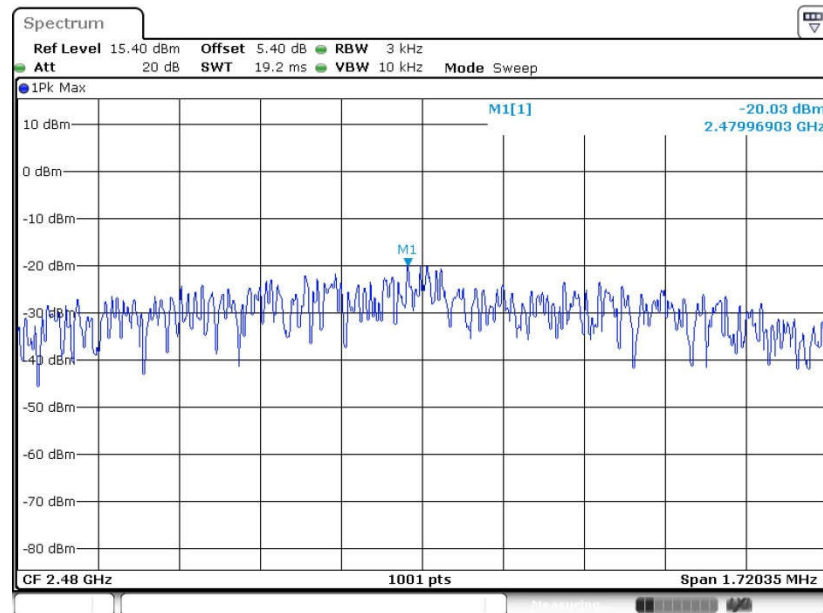

Date: 9 JUN 2018 14:31:28

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


3.4.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.4.3 Test Procedure

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v05.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

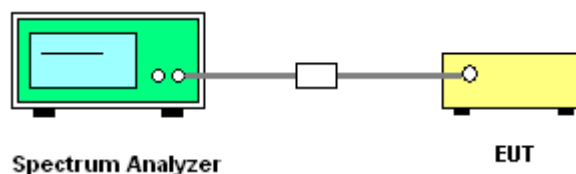




3.4.5 Test Result of Conducted Band Edges Plots


For Bluetooth LE v4.0

Low Band Edge Plot on Channel 00

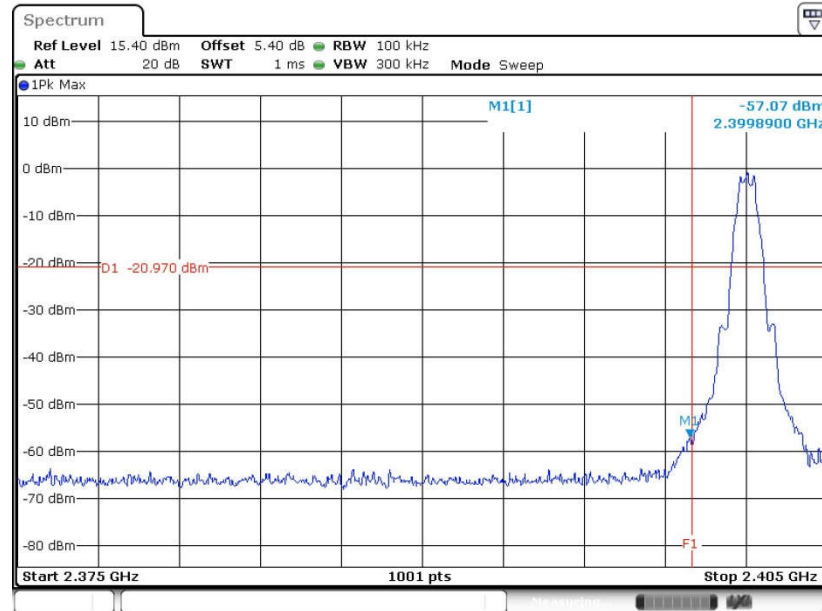

Date: 9 JUN 2018 12:37:47

High Band Edge Plot on Channel 39

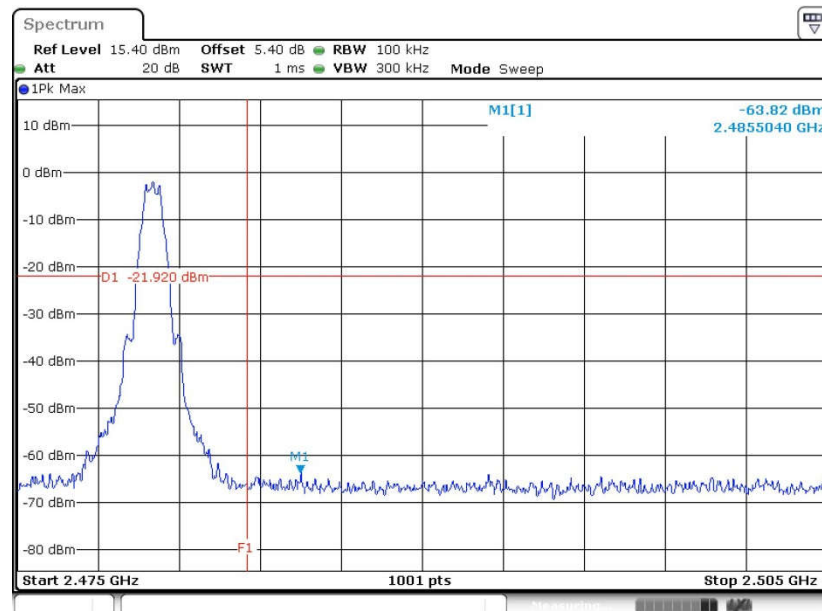


Date: 9 JUN 2018 13:28:02




For Bluetooth LE v5.0

Low Band Edge Plot on Channel 00

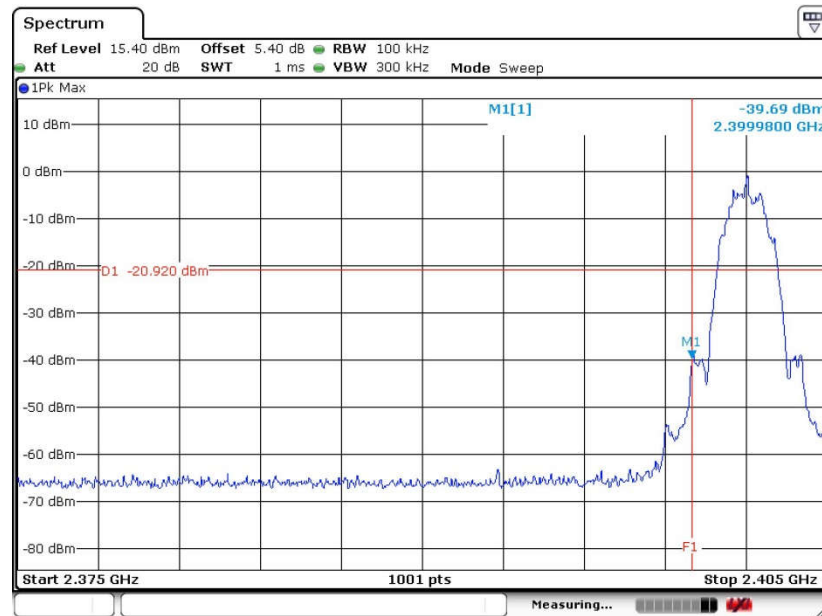

Date: 9 JUN 2018 14:01:00

High Band Edge Plot on Channel 39

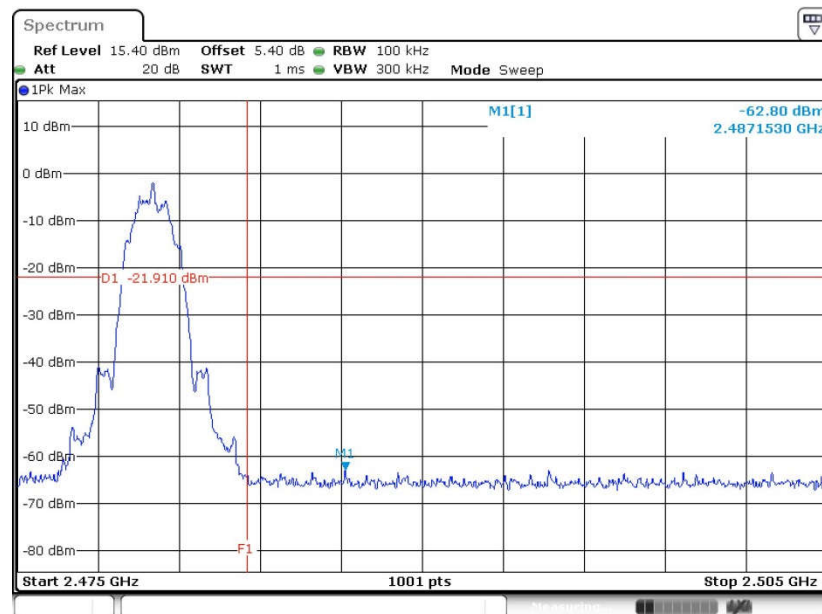

Date: 9 JUN 2018 14:32:51




3.4.6 Test Result of Conducted Spurious Emission Plots

For Bluetooth LE v4.0

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps


GFSK Channel 00

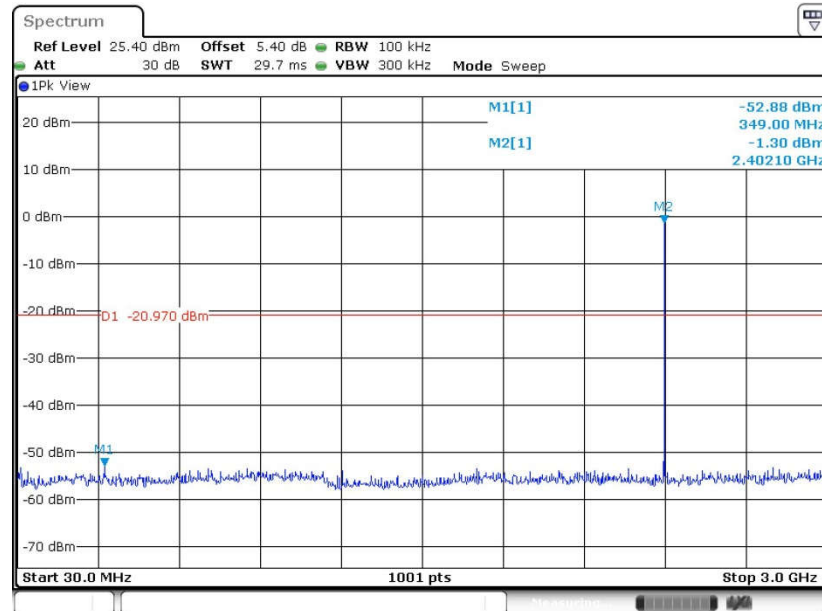

Date: 9 JUN 2018 12:37:59

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps


GFSK Channel 00

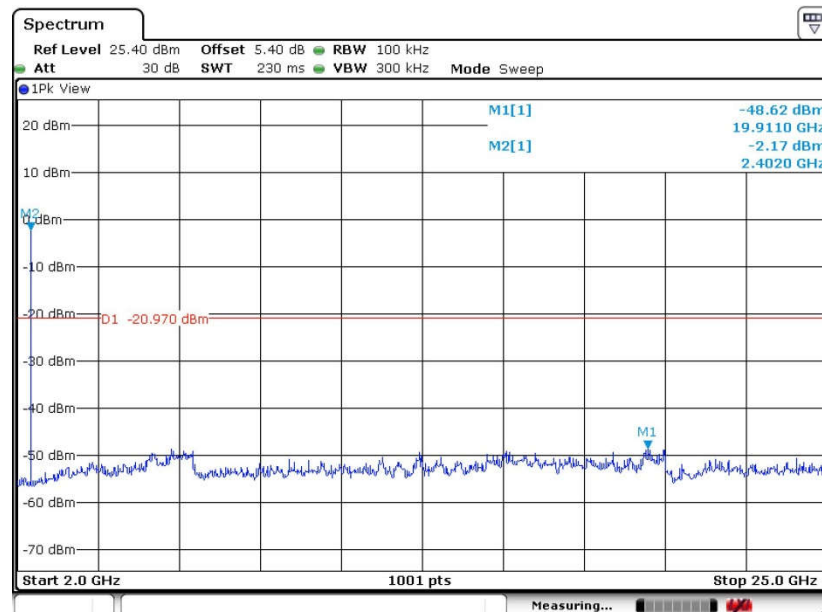

Date: 9 JUN 2018 12:38:59




Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 19

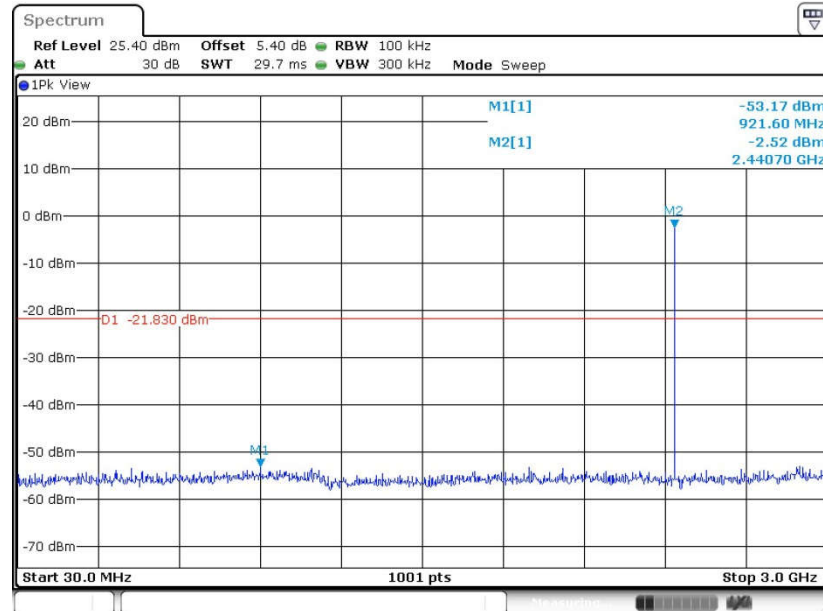

Date: 9 JUN 2018 12:43:19


Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 19

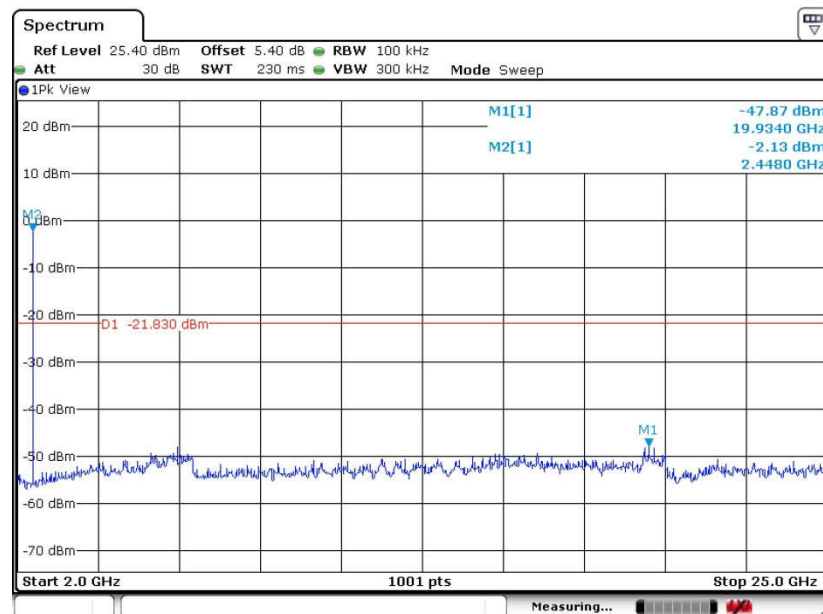

Date: 9 JUN 2018 12:44:05




Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 39

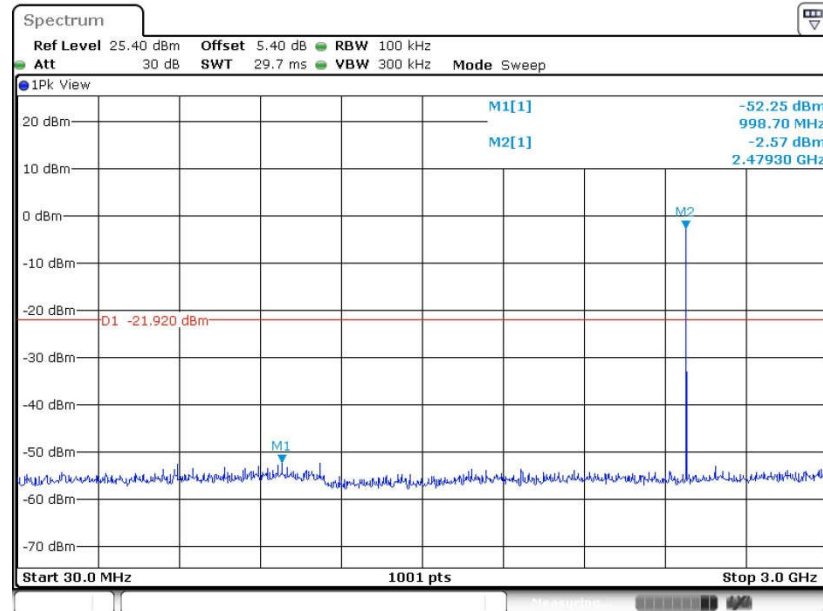

Date: 9 JUN 2018 13:29:55

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 39

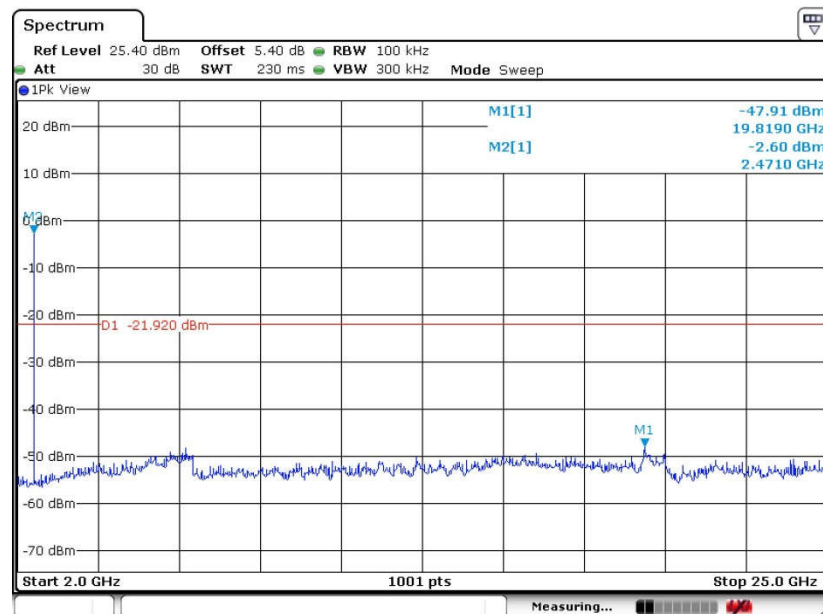


Date: 9 JUN 2018 13:30:24




For Bluetooth LE v5.0

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 00

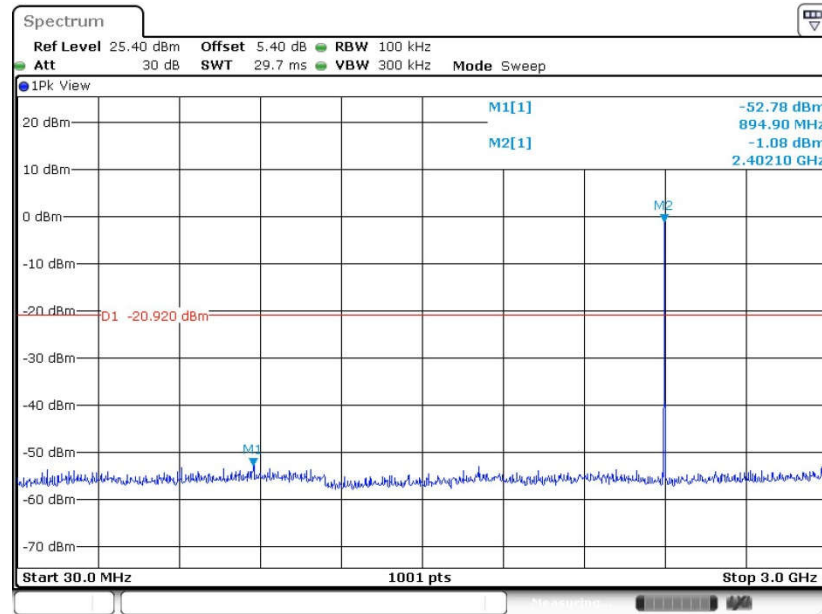

Date: 9 JUN 2018 14:01:47


Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 00

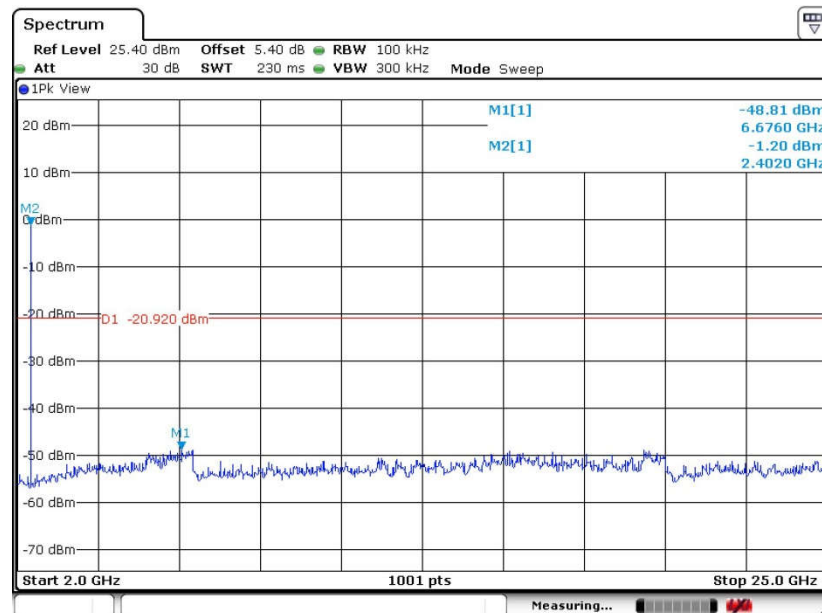

Date: 9 JUN 2018 14:02:12




Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 19

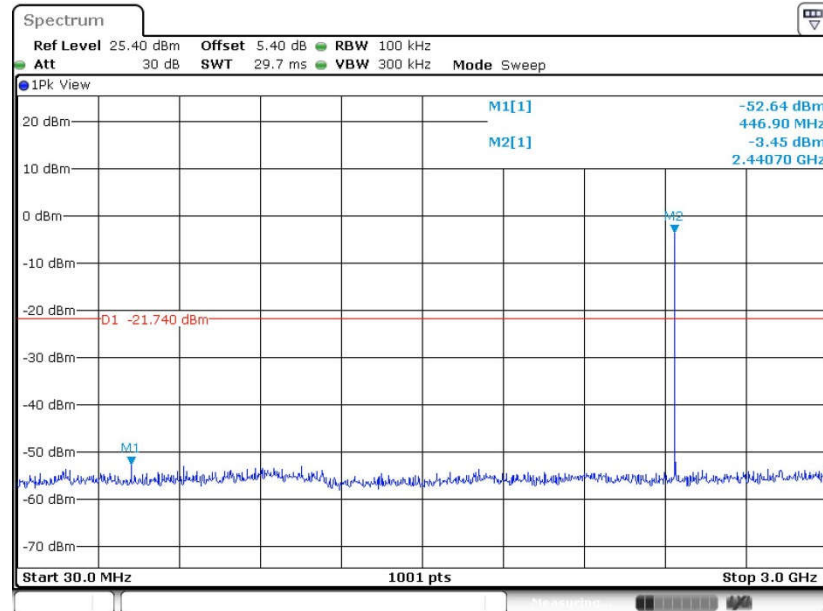

Date: 9 JUN 2018 14:25:59


Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 19

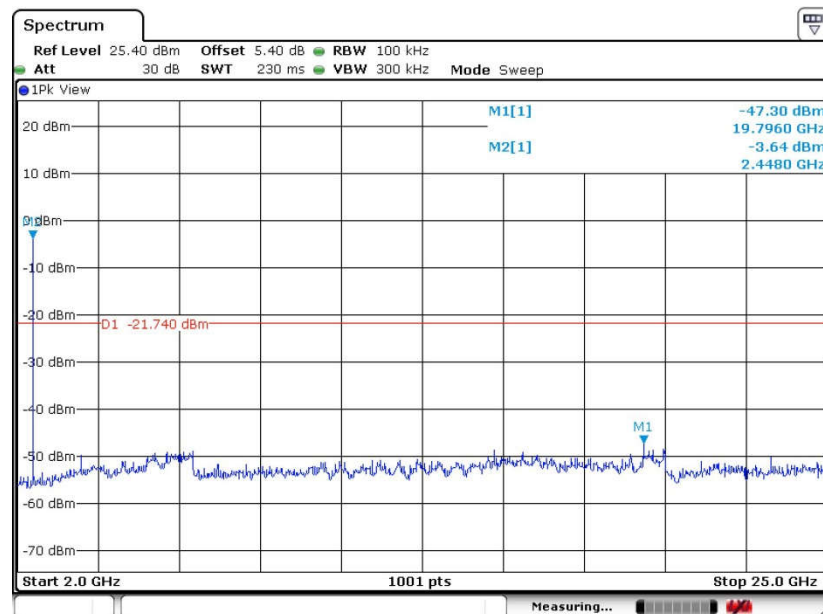

Date: 9 JUN 2018 14:27:26




Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 39

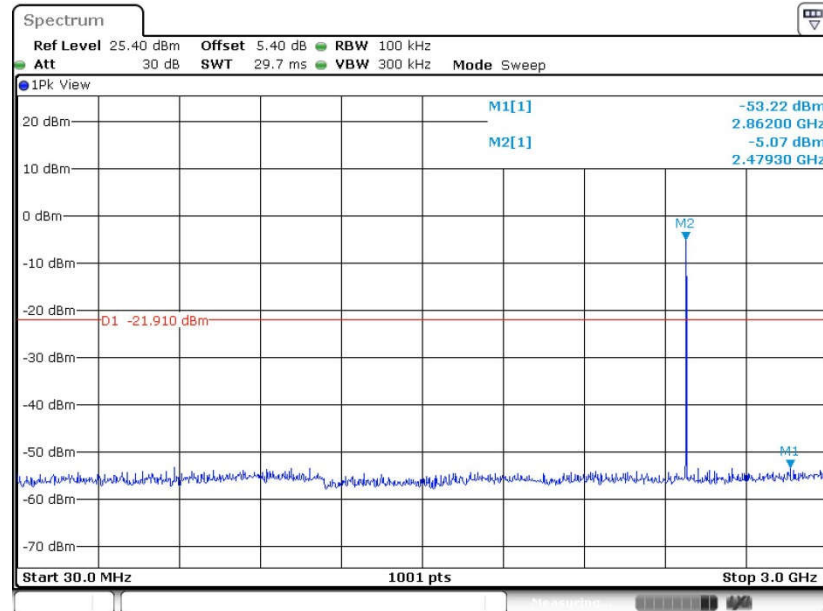

Date: 9 JUN 2018 14:33:09

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 39

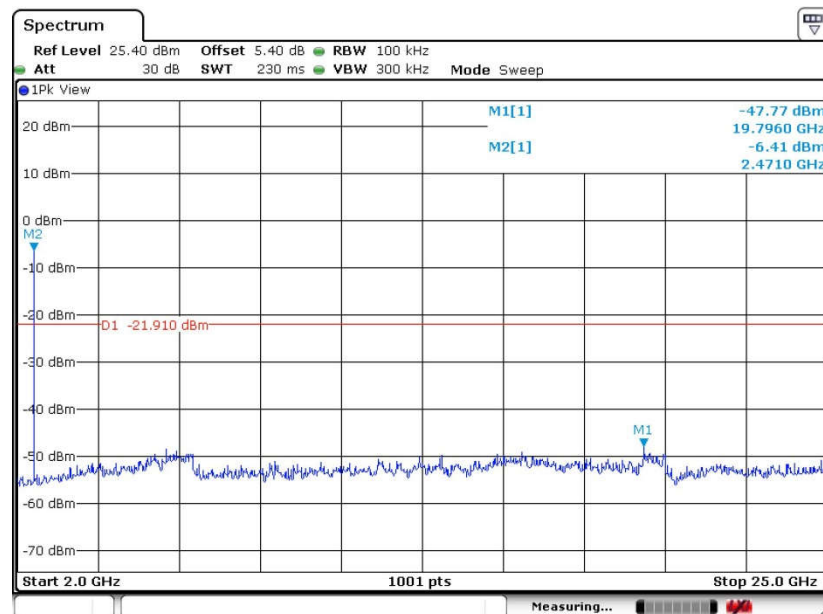

Date: 9 JUN 2018 14:33:50

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments


The section 4 of List of Measuring Equipment of this test report is used for test.

3.5.3 Test Procedures


1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v05.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - $VBW = 10$ Hz, when duty cycle is no less than 98 percent.
 - $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

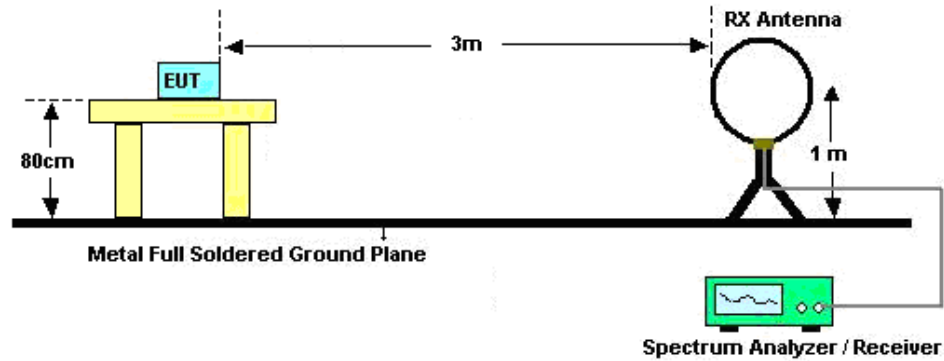

For radiated emissions from 30MHz to 1GHz

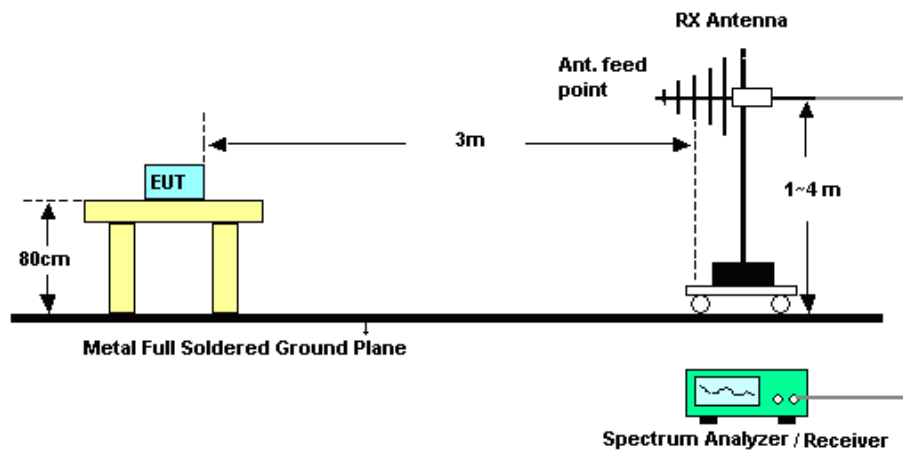

For radiated emissions above 1GHz

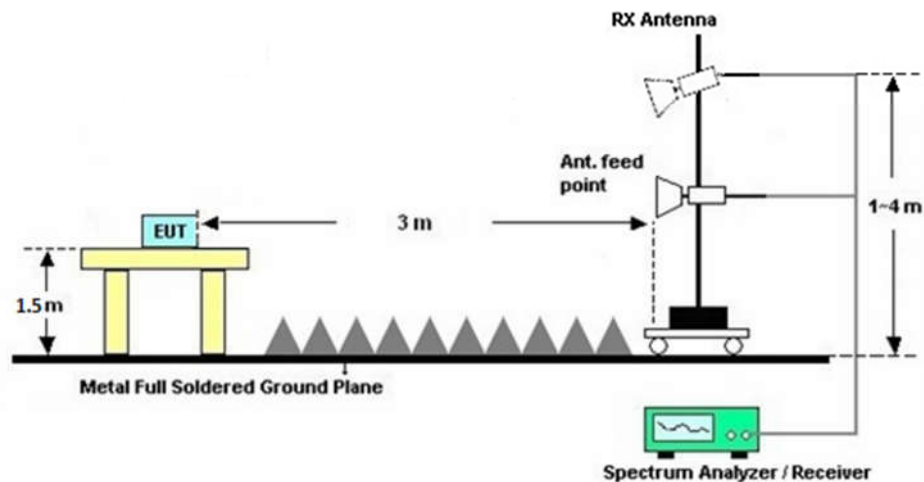



3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix C.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.6.4 Test Setup

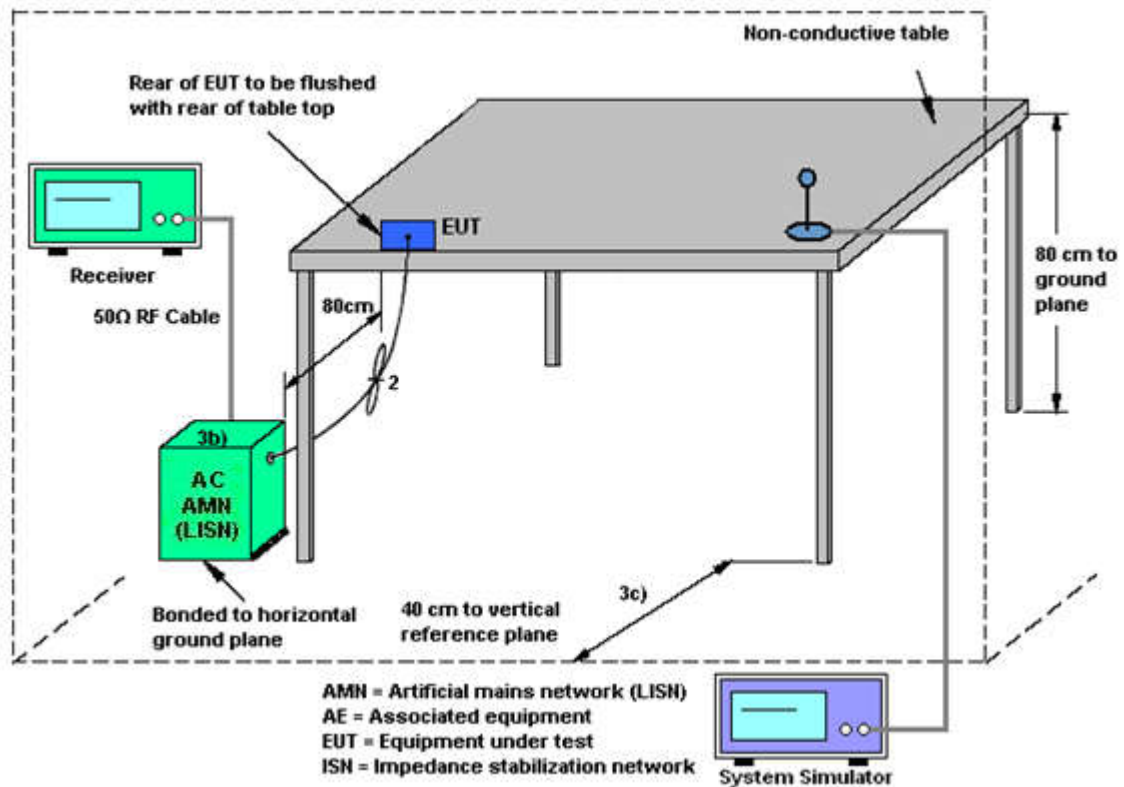

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Aug. 08, 2017	Jun. 09, 2018	Aug. 07, 2018	Conducted (TH01-KS)
Spectrum Analyzer	R&S	FSP40	100319	9kHz~40GHz	Oct. 12, 2017	Jun. 09, 2018	Oct. 11, 2018	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 18, 2018	Jun. 09, 2018	Jan. 17, 2019	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 18, 2018	Jun. 09, 2018	Jan. 17, 2019	Conducted (TH01-KS)
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz; Max 30dBm	Aug. 08, 2017	Jul. 06, 2018	Aug. 07, 2018	Radiation (03CH02-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150208	10Hz~44G, MAX 30dB	Apr. 17, 2018	Jul. 06, 2018	Apr. 16, 2019	Radiation (03CH02-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 22, 2017	Jul. 06, 2018	Oct. 21, 2018	Radiation (03CH02-KS)
Bilog Antenna	TeseQ	CBL6112D	23182	30MHz~2GHz	Jan. 29, 2018	Jul. 06, 2018	Jan. 28, 2019	Radiation (03CH02-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Oct. 21, 2017	Jul. 06, 2018	Oct. 20, 2018	Radiation (03CH02-KS)
SHF-EHF Horn	Schwarzbeck	BBHA 9170	BBHA170249	15GHz~40GHz	Feb. 07, 2018	Jul. 06, 2018	Feb. 06, 2019	Radiation (03CH02-KS)
Amplifier	SONOMA	310N	187289	9KHz~1GHz	Aug. 07, 2017	Jul. 06, 2018	Aug. 06, 2018	Radiation (03CH02-KS)
Amplifier	Agilent	8449B	3008A02384	1GHz~26.5GHz	Oct. 12, 2017	Jul. 06, 2018	Oct. 11, 2018	Radiation (03CH02-KS)
Amplifier	MITEQ	TTA1840-35-HG	1887435	18~40GHz	Oct. 12, 2017	Jul. 06, 2018	Oct. 11, 2018	Radiation (03CH02-KS)
AC Power Source	Chroma	61601	616010002473	N/A	NCR	Jul. 06, 2018	NCR	Radiation (03CH02-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Jul. 06, 2018	NCR	Radiation (03CH02-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Jul. 06, 2018	NCR	Radiation (03CH02-KS)
RF Cable	HUBER+SUHNER	SUCOFLEX104	03CH01KS005	30Mhz~18Ghz	Jun. 20, 2018	Jul. 06, 2018	Jun. 19, 2019	Radiation (03CH02-KS)
RF Cable	HUBER+SUHNER	SUCOFLEX104	03CH01KS006	30Mhz~18Ghz	Jun. 20, 2018	Jul. 06, 2018	Jun. 19, 2019	Radiation (03CH02-KS)
High Pass Filter	Wainwright Instruments GmbH	WHKX10-5850-6500-18000-40ST	1	6.5G High Pass	Jun.19.2018	Jul. 06, 2018	Jun.18.2019	Radiation (03CH02-KS)
High Pass Filter	Wainwright Instruments GmbH	WHKX12-2805-3000-18000-40ST	2	3G High Pass	Jun.21.2018	Jul. 06, 2018	Jun.20.2019	Radiation (03CH02-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 19, 2018	Jun. 07, 2018	Apr. 18, 2019	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060103	9kHz~30MHz	Oct. 13, 2017	Jun. 07, 2018	Oct. 12, 2018	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060105	9kHz~30MHz	Oct. 13, 2017	Jun. 07, 2018	Oct. 12, 2018	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000811	AC 0V~300V, 45Hz~1000Hz	Oct. 12, 2017	Jun. 07, 2018	Oct. 11, 2018	Conduction (CO01-KS)
RF Cable	WOKEN	Y5T	00100N1Q3N1	150kHz~30MHz	Aug. 25, 2017	Jun. 07, 2018	Aug. 24, 2018	Conduction (CO01-KS)
Transient limiter	COM-POWER	LIT-153	531040	150kHz~30MHz	Aug. 25, 2017	Jun. 07, 2018	Aug. 24, 2018	Conduction (CO01-KS)

NCR: No Calibration Required

5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.9 dB
--	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	4.8 dB
--	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	5.2 dB
--	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	5.0 dB
--	--------

Bluetooth LE v4.0

Test Engineer:	Silent Hai	Temperature:	21~25	°C
Test Date:	2018/6/9	Relative Humidity:	49~51	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	1Mbps	1	0	2402	1.02	0.67	0.50	Pass
BLE	1Mbps	1	19	2440	1.02	0.67	0.50	Pass
BLE	1Mbps	1	39	2480	1.02	0.67	0.50	Pass

TEST RESULTS DATA
Peak Power Table

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	-0.32	30.00	1.90	1.58	36.00	Pass
BLE	1Mbps	1	19	2440	-1.19	30.00	1.90	0.71	36.00	Pass
BLE	1Mbps	1	39	2480	-1.43	30.00	1.90	0.47	36.00	Pass

TEST RESULTS DATA
Average Power Table
(Reporting Only)

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
BLE	1Mbps	1	0	2402	2.04	-0.62
BLE	1Mbps	1	19	2440	2.04	-1.51
BLE	1Mbps	1	39	2480	2.04	-1.73

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	1Mbps	1	0	2402	-0.97	-15.49	1.90	8.00	Pass
BLE	1Mbps	1	19	2440	-1.83	-16.32	1.90	8.00	Pass
BLE	1Mbps	1	39	2480	-1.92	-16.49	1.90	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 20dBc limit.

Bluetooth LE v5.0

Test Engineer:	Silent Hai	Temperature:	21~25	°C
Test Date:	2018/6/9	Relative Humidity:	49~51	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	1Mbps	1	0	2402	2.03	1.15	0.50	Pass
BLE	1Mbps	1	19	2440	2.03	1.15	0.50	Pass
BLE	1Mbps	1	39	2480	2.03	1.15	0.50	Pass

TEST RESULTS DATA
Peak Power Table

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	-0.27	30.00	1.90	1.63	36.00	Pass
BLE	1Mbps	1	19	2440	-1.09	30.00	1.90	0.81	36.00	Pass
BLE	1Mbps	1	39	2480	-1.33	30.00	1.90	0.57	36.00	Pass

TEST RESULTS DATA
Average Power Table
(Reporting Only)

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
BLE	1Mbps	1	0	2402	4.83	-0.51
BLE	1Mbps	1	19	2440	4.83	-1.28
BLE	1Mbps	1	39	2480	4.83	-1.88

TEST RESULTS DATA
Peak Power Density


Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	1Mbps	1	0	2402	-0.92	-19.03	1.90	8.00	Pass
BLE	1Mbps	1	19	2440	-1.74	-19.95	1.90	8.00	Pass
BLE	1Mbps	1	39	2480	-1.91	-20.03	1.90	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 20dBc limit.



Appendix B. AC Conducted Emission Test Results

Test Engineer :	Amos Zhang	Temperature :	25.2~25.6℃
		Relative Humidity :	45~48%
Test Voltage :	120Vac / 60Hz	Phase :	Line

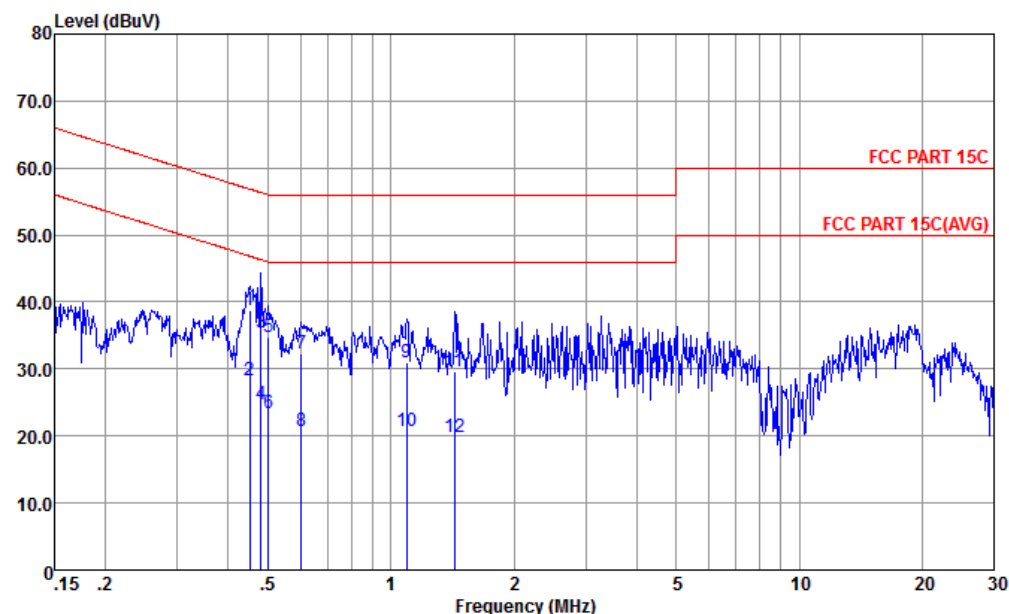


Site : CO01-KS
Condition : FCC PART 15C LISN-L-171013-060103 LINE

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1 *	0.452	38.81	-18.04	56.85	28.21	0.25	10.35	QP
2	0.452	28.21	-18.64	46.85	17.61	0.25	10.35	Average
3	0.481	35.38	-20.94	56.32	24.80	0.26	10.32	QP
4	0.481	24.78	-21.54	46.32	14.20	0.26	10.32	Average
5	0.502	34.76	-21.24	56.00	24.20	0.26	10.30	QP
6	0.502	23.46	-22.54	46.00	12.90	0.26	10.30	Average
7	0.604	32.39	-23.61	56.00	21.90	0.26	10.23	QP
8	0.604	20.69	-25.31	46.00	10.20	0.26	10.23	Average
9	1.094	30.98	-25.02	56.00	20.60	0.26	10.12	QP
10	1.094	20.68	-25.32	46.00	10.30	0.26	10.12	Average
11	1.433	29.63	-26.37	56.00	19.20	0.27	10.16	QP
12	1.433	19.73	-26.27	46.00	9.30	0.27	10.16	Average



Test Engineer :	Amos Zhang	Temperature :	25.2~25.6℃
		Relative Humidity :	45~48%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral

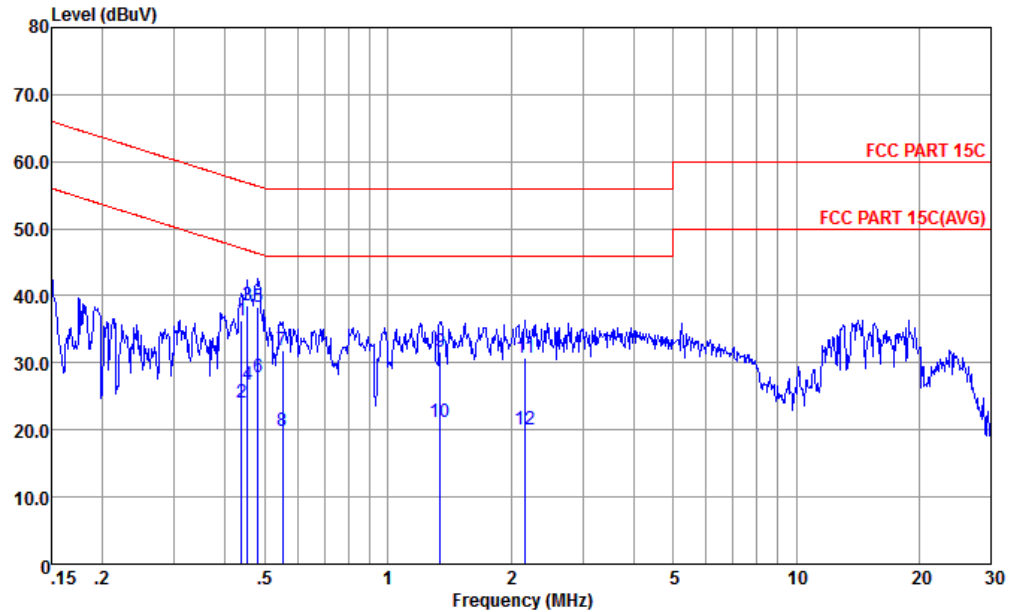

Site : CO01-KS
Condition : FCC PART 15C LISN-N-171013-060103 NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.437	36.25	-20.86	57.11	25.59	0.29	10.37	QP
2	0.437	24.15	-22.96	47.11	13.49	0.29	10.37	Average
3	0.454	38.54	-18.26	56.80	27.90	0.29	10.35	QP
4	0.454	26.84	-19.96	46.80	16.20	0.29	10.35	Average
5 *	0.481	38.41	-17.91	56.32	27.80	0.29	10.32	QP
6	0.481	27.91	-18.41	46.32	17.30	0.29	10.32	Average
7	0.552	31.76	-24.24	56.00	21.21	0.29	10.26	QP
8	0.552	19.86	-26.14	46.00	9.31	0.29	10.26	Average
9	1.345	31.67	-24.33	56.00	21.21	0.31	10.15	QP
10	1.345	21.07	-24.93	46.00	10.61	0.31	10.15	Average
11	2.167	30.73	-25.27	56.00	20.20	0.32	10.21	QP
12	2.167	20.03	-25.97	46.00	9.50	0.32	10.21	Average



Appendix C. Radiated Spurious Emission

For Bluetooth LE v4.0

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 00 2402MHz		2333.53	51.83	-22.17	74	51.69	31.73	5.09	36.68	304	128	P	H
		2358.75	42.05	-11.95	54	41.84	31.76	5.12	36.67	304	128	A	H
	*	2402	86.89	-	-	86.59	31.8	5.14	36.64	304	128	P	H
	*	2402	86.33	-	-	86.03	31.8	5.14	36.64	304	128	A	H
		2383.71	51.83	-22.17	74	51.56	31.78	5.14	36.65	152	81	P	V
		2360.05	42.2	-11.8	54	41.99	31.76	5.12	36.67	152	81	A	V
	*	2402	89.38	-	-	89.08	31.8	5.14	36.64	152	81	P	V
	*	2402	88.89	-	-	88.59	31.8	5.14	36.64	152	81	A	V
BLE CH 39 2480MHz	*	2480	90.56	-	-	89.91	32.09	5.24	36.68	251	132	P	H
	*	2480	89.7	-	-	89.05	32.09	5.24	36.68	251	132	A	H
		2490.16	51.8	-22.2	74	51.1	32.14	5.24	36.68	251	132	P	H
		2495.56	41.86	-12.14	54	41.17	32.14	5.24	36.69	251	132	A	H
	*	2480	94.35	-	-	93.7	32.09	5.24	36.68	118	72	P	V
	*	2480	93.7	-	-	93.05	32.09	5.24	36.68	118	72	A	V
		2490.22	51.64	-22.36	74	50.94	32.14	5.24	36.68	118	72	P	V
		2483.51	41.98	-12.02	54	41.33	32.09	5.24	36.68	118	72	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 00 2402MHz		4806	44.6	-29.4	74	67.16	34.22	7.72	64.5	100	360	P	H
		4806	40.97	-33.03	74	63.53	34.22	7.72	64.5	100	360	P	V
BLE CH 19 2440MHz		4878	43.34	-30.66	74	65.86	34.31	7.77	64.6	100	360	P	H
		7320	38.79	-35.21	74	58.72	35.8	9.29	65.02	100	360	P	H
		4878	40.91	-33.09	74	63.43	34.31	7.77	64.6	100	360	P	V
		7320	40.4	-33.6	74	60.33	35.8	9.29	65.02	100	360	P	V
BLE CH 39 2480MHz		4962	46.16	-27.84	74	68.64	34.43	7.82	64.73	100	360	P	H
		7440	40.36	-33.64	74	60.16	35.87	9.41	65.08	100	360	P	H
		4962	44.22	-29.78	74	66.7	34.43	7.82	64.73	100	360	P	V
		7440	41.58	-32.42	74	61.38	35.87	9.41	65.08	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

2.4GHz BLE (LF)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz BLE LF		30.97	20.79	-19.21	40	28.3	23.93	0.59	32.03	-	-	P	H
		111.48	15.79	-27.71	43.5	28.99	17.63	1.08	31.91	-	-	P	H
		165.8	22.85	-20.65	43.5	37.69	15.63	1.32	31.79	-	-	P	H
		172.59	21.88	-21.62	43.5	36.87	15.43	1.34	31.76	-	-	P	H
		710.94	25.16	-20.84	46	26.49	24.73	2.77	28.83	-	-	P	H
		930.16	27.3	-18.7	46	24.7	26.73	3.16	27.29	100	0	P	H
		47.46	26.33	-13.67	40	42.58	15.16	0.69	32.1	100	0	P	V
		57.16	24.97	-15.03	40	43.5	12.82	0.78	32.13	-	-	P	V
		73.65	21.8	-18.2	40	40.24	12.75	0.87	32.06	-	-	P	V
		169.68	21.34	-22.16	43.5	36.27	15.51	1.33	31.77	-	-	P	V
		454.86	22.88	-23.12	46	28.72	22.48	2.2	30.52	-	-	P	V
		936.95	27.46	-18.54	46	24.7	26.81	3.18	27.23	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



For Bluetooth LE v5.0

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 00 2402MHz		2329.11	52.01	-21.99	74	51.89	31.73	5.07	36.68	100	280	P	H
		2374.74	43.39	-10.61	54	43.14	31.78	5.12	36.65	100	280	A	H
	*	2402	89.82	-	-	89.52	31.8	5.14	36.64	100	280	P	H
	*	2402	88.51	-	-	88.21	31.8	5.14	36.64	100	280	A	H
		2325.99	52.4	-21.6	74	52.28	31.73	5.07	36.68	360	252	P	V
		2384.88	43.39	-10.61	54	43.12	31.78	5.14	36.65	360	252	A	V
	*	2402	85.64	-	-	85.34	31.8	5.14	36.64	360	252	P	V
	*	2402	84.31	-	-	84.01	31.8	5.14	36.64	360	252	A	V
BLE CH 39 2480MHz		2496.7	51.99	-22.01	74	51.3	32.14	5.24	36.69	118	283	P	H
		2483.5	43.89	-10.11	54	43.24	32.09	5.24	36.68	118	283	A	H
	*	2480	93.61	-	-	92.96	32.09	5.24	36.68	118	283	P	H
	*	2480	92.09	-	-	91.44	32.09	5.24	36.68	118	283	A	H
		2490.76	51.99	-22.01	74	51.29	32.14	5.24	36.68	331	255	P	V
		2497.6	43.29	-10.71	54	42.6	32.14	5.24	36.69	331	255	A	V
	*	2480	88.92	-	-	88.27	32.09	5.24	36.68	331	255	P	V
	*	2480	87.65	-	-	87	32.09	5.24	36.68	331	255	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 00 2402MHz		4806	41.5	-32.5	74	64.06	34.22	7.72	64.5	100	360	P	H
		4806	42.1	-31.9	74	64.66	34.22	7.72	64.5	100	360	P	V
BLE CH 19 2440MHz		4878	40.15	-33.85	74	62.67	34.31	7.77	64.6	100	360	P	H
		7320	39.6	-34.4	74	59.53	35.8	9.29	65.02	100	360	P	H
		4878	41.27	-32.73	74	63.79	34.31	7.77	64.6	100	360	P	V
		7320	39.86	-34.14	74	59.79	35.8	9.29	65.02	100	360	P	V
BLE CH 39 2480MHz		4962	44.95	-29.05	74	67.43	34.43	7.82	64.73	100	360	P	H
		7440	39.78	-34.22	74	59.58	35.87	9.41	65.08	100	360	P	H
		4962	44.75	-29.25	74	67.23	34.43	7.82	64.73	100	360	P	V
		7440	39.7	-34.3	74	59.5	35.87	9.41	65.08	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

2.4GHz BLE (LF)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz BLE LF		30	21.79	-18.21	40	28.75	24.5	0.57	32.03	-	-	P	H
		154.16	27.51	-15.99	43.5	41.86	16.2	1.28	31.83	-	-	P	H
		164.83	28.13	-15.37	43.5	42.94	15.66	1.32	31.79	100	0	P	H
		184.23	23.95	-19.55	43.5	39.06	15.22	1.39	31.72	-	-	P	H
		385.02	26.9	-19.1	46	34.42	21.22	2.03	30.77	-	-	P	H
		906.88	27.17	-18.83	46	25.05	26.47	3.11	27.46	-	-	P	H
		45.52	30.08	-9.92	40	45.45	16.07	0.67	32.11	100	0	P	V
		61.04	28.34	-11.66	40	47.26	12.42	0.81	32.15	-	-	P	V
		74.62	24.77	-15.23	40	43.18	12.78	0.88	32.07	-	-	P	V
		185.2	22.01	-21.49	43.5	37.11	15.23	1.39	31.72	-	-	P	V
		375.32	21.69	-24.31	46	29.52	20.97	2	30.8	-	-	P	V
		906.88	27.5	-18.5	46	25.38	26.47	3.11	27.46	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												

**Note symbol**

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency per 15.209(c).
!	Test result is over limit line.
P/A	P eak or A verage
H/V	H orizontal or V ertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Level(dBμV/m) =

Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)


= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.

Appendix D. Duty Cycle Plots

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
Bluetooth LE v4.0	61.66	0.386	2.591	3KHz
Bluetooth LE v5.0	32.59	0.204	4.907	10KHz

Bluetooth LE v4.0

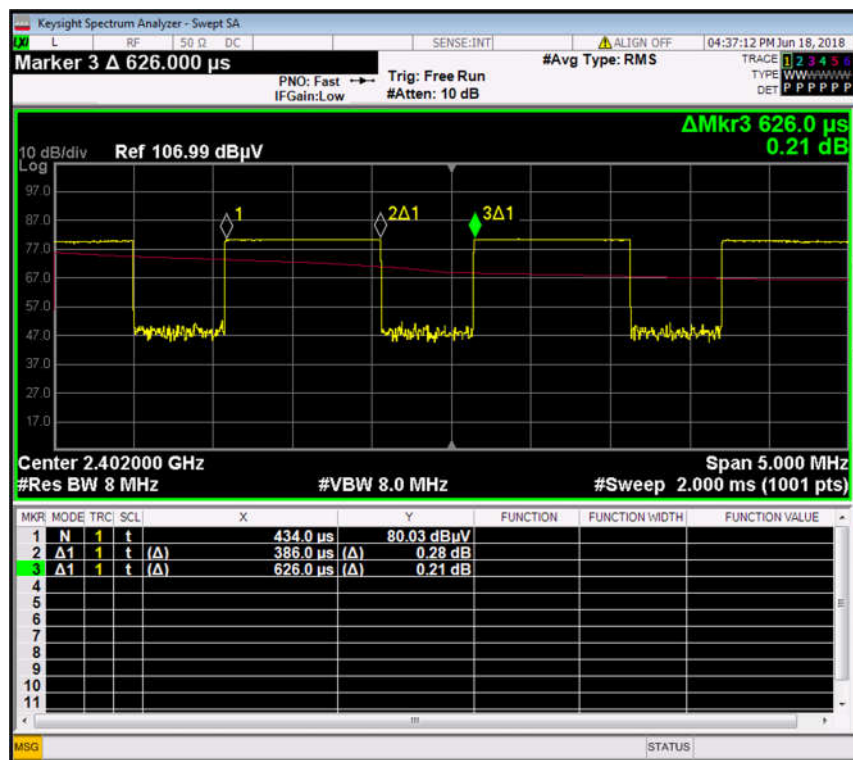



Bluetooth LE v5.0

