



FCC RF Test Report

APPLICANT : Honeywell International Inc.
Honeywell Safety and Productivity Solutions

EQUIPMENT : Mobile Computer

BRAND NAME : Honeywell

MODEL NAME : CT40P-L1N

FCC ID : HD5-CT40PL1N

STANDARD : 47 CFR Part 2, 22(H), 24(E), 27(L)

CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)

The product was received on Jul. 24, 2020 and completely tested on Aug. 30, 2020. We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.

Jason Jia

Reviewed by: Jason Jia / Supervisor

James Huang

Approved by: James Huang / Manager



Sporton International (Kunshan) Inc.

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant.....	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test	5
1.4 Product Specification of Equipment Under Test	6
1.5 Modification of EUT	7
1.6 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator	7
1.7 Testing Location	8
1.8 Test Software	8
1.9 Applicable Standards	8
1.10 Re-use of Measured Data	9
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	10
2.1 Test Mode.....	10
2.2 Connection Diagram of Test System	11
2.3 Support Unit used in test configuration	11
2.4 Frequency List of Low/Middle/High Channels	12
3 CONDUCTED TEST RESULT.....	13
3.1 Measuring Instruments.....	13
3.2 Test Setup	13
3.3 Test Result of Conducted Test.....	13
3.4 Conducted Output Power and ERP/EIRP	14
4 LIST OF MEASURING EQUIPMENT	15
5 UNCERTAINTY OF EVALUATION	16
APPENDIX A. TEST RESULTS OF CONDUCTED TEST	
APPENDIX B. TEST SETUP PHOTOGRAPHS	
APPENDIX C. REFERENCE REPORT	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG072404A	Rev. 01	Initial issue of report	Sep. 03, 2020

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	Reporting Only	PASS	-
	§22.913(a)(5)	Effective Radiated Power	< 7 Watts	PASS	-
	§24.232(c)	Equivalent Isotropic Radiated Power	< 2 Watts	PASS	-
	§27.50(d)(4)	Equivalent Isotropic Radiated Power	< 1 Watts	PASS	-
-	§24.232(d)	Peak-to-Average Ratio	< 13 dB	PASS	1
-	§2.1049	Occupied Bandwidth	Reporting Only	PASS	1
-	§2.1051 §22.917(a) §24.238(a) §27.53(h)	Band Edge Measurement	< 43+10log10(P[Watts])	PASS	1
-	§2.1051 §22.917(a) §24.238(a) §27.53(h)	Conducted Emission	< 43+10log10(P[Watts])	PASS	1
-	§2.1055 §22.355	Frequency Stability for Temperature & Voltage	< 2.5 ppm for Part 22	PASS	1
	§2.1055 §24.235 §27.54		Within Authorized Band		
-	§2.1053; §22.917(a); §24.238(a); §27.53(h)	Field Strength of Spurious Radiation	< 43+10log10(P[Watts])	PASS	1

Remark: 1. The test items were leveraged from Report No.FG850409A.

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Applicant

Honeywell International Inc.
Honeywell Safety and Productivity Solutions
9680 Old Bailes Rd. Fort Mill, SC 29707 United States

1.2 Manufacturer

Honeywell International Inc.
Honeywell Safety and Productivity Solutions
9680 Old Bailes Rd. Fort Mill, SC 29707 United States

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Computer
Brand Name	Honeywell
Model Name	CT40P-L1N
FCC ID	HD5-CT40PL1N
EUT supports Radios application	CDMA/GSM/WCDMA/LTE/NFC/GNSS WLAN 2.4GHz 802.11b/g/n (HT20/HT40) WLAN 5GHz 802.11a/n/ac (HT20/HT40/VHT20/VHT40/VHT80) Bluetooth BR / EDR / LE
HW Version	V2.0
SW Version	OS.03.003-HON.02.001
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	GSM/GPRS/EDGE: 850: 824.2 MHz ~ 848.8 MHz 1900: 1850.2 MHz ~ 1909.8MHz WCDMA: Band V: 826.4 MHz ~ 846.6 MHz Band II: 1852.4 MHz ~ 1907.6 MHz Band IV: 1712.4 MHz ~ 1752.6 MHz CDMA2000: BC0: 824.70 MHz ~ 848.31 MHz BC1: 1851.25 MHz ~ 1908.75 MHz
Rx Frequency	GSM/GPRS/EDGE: 850: 869.2 MHz ~ 893.8 MHz 1900: 1930.2 MHz ~ 1989.8 MHz WCDMA: Band V: 871.4 MHz ~ 891.6 MHz Band II: 1932.4 MHz ~ 1987.6 MHz Band IV: 2112.4 MHz ~ 2152.6 MHz CDMA2000: BC0: 869.70 MHz ~ 893.31 MHz BC1: 1931.25 MHz ~ 1988.75 MHz
Maximum Output Power to Antenna	GSM/GPRS/EDGE: 850: 32.33 dBm 1900: 29.45 dBm WCDMA: Band V: 23.46 dBm Band II: 22.25 dBm Band IV: 20.69 dBm CDMA2000: BC0: 22.79 dBm BC1: 21.91 dBm
Antenna Type	IFA Antenna
Antenna Gain	Cellular Band: 0.90 dBi PCS Band: -0.40 dBi AWS Band: 2.50 dBi
Type of Modulation	GSM: GMSK GPRS: GMSK EDGE: GMSK / 8PSK WCDMA: BPSK (Uplink) HSDPA/DC-HSDPA: QPSK (Uplink) HSUPA: QPSK (Uplink) HSPA+: 16QAM (16QAM uplink is not supported) DC-HSDPA: 64QAM CDMA2000 1xRTT: QPSK CDMA2000 1xEV-DO: QPSK/8PSK



1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator

FCC Rule	System	Type of Modulation	Maximum ERP/EIRP (W)	Frequency Tolerance (ppm)	Emission Designator
Part 22H	GSM850 GSM	GMSK	1.2823	-	-
Part 22H	GSM850 EDGE class 8	8PSK	0.3972	-	-
Part 22H	WCDMA Band V RMC 12.2Kbps	BPSK	0.1663	-	-
Part 22H	CDMA2000 BC0 1xRTT	QPSK	0.1426	-	-
Part 24E	GSM1900 GSM	GMSK	0.8035	-	-
Part 24E	GSM1900 EDGE class 8	8PSK	0.3556	-	-
Part 24E	WCDMA Band II RMC 12.2Kbps	BPSK	0.1531	-	-
Part 24E	CDMA2000 BC1 1xRTT	QPSK	0.1416	-	-
Part 27L	WCDMA Band IV RMC 12.2Kbps	BPSK	0.2084	-	-

1.7 Testing Location

Sporton International (Kunshan) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International (Kunshan) Inc.		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH01-KS 03CH04-KS	CN1257	314309

1.8 Test Software

Item	Site	Manufacture	Name	Version
1.	03CH04-KS	AUDIX	E3	6.2009-8-24a

1.9 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2, 22(H), 24(E), 27(L)
- ♦ ANSI C63.26-2015
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



1.10 Re-use of Measured Data

1.10.1 Introduction Section

This application re-uses data collected on a similar device. The subject device of this application (Model: CT40P-L1N, FCC ID: HD5-CT40PL1N) is electrically identical to the reference device (Model: CT40-L1N, FCC ID: HD5-CT40L1N) for the portions of the circuitry corresponding to the data being re-used, as treated by KDB Publication 484596 D01.

1.10.2 Difference Section

For details concerning the similarity with respect to component placement, mechanical/electrical design etc., please refer to the Product Equality Declaration.

The re-used RF data includes the following bands provided in Appendix C (Sporton RF Report No. FG 850409A for the reference device Model: CT40-L1N, FCC ID: HD5-CT40L1N).

1.10.3 Reference detail Section:

Equipment Class	Reference FCC ID	Report Number	Report Title/Section
PCE (2G/3G)	HD5-CT40L1N	Part22H.24E.27L (Report No. FG850409A)	All sections applicable except conducted power and ERP/EIRP.

1.10.4 Spot Check Verification Data Section

In order to confirm hardware similarity of the subject device with the reference device, spot check measurements were performed on the subject device for the following test items, the test result were consistent with FCC ID: HD5-CT40L1N.

Assertions concerning the similarity of these devices are based on representations by the applicant. The applicant accepts full responsibility for the validity of the similarity claim, and for the determination that verification test data are sufficient to support it.

Test Item	Mode	HD5-CT40L1N Worst Result	HD5-CT40PL1N Worst Result	Difference (dB)
Radiated Spurious Emission (dBuV/m)	Part 22H GSM 850	-30.72	-44.07	-13.35

2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

Radiated measurements were performed with rotating EUT in different three orthogonal test planes to find the maximum emission.

Radiated emissions were investigated as following frequency range:


1. 30 MHz to 9000 MHz for GSM850 and WCDMA Band V and CDMA BC0.
2. 30 MHz to 18000 MHz for WCDMA Band IV.
3. 30 MHz to 19100 MHz for GSM1900 and WCDMA Band II and CDMA BC1.

All modes and data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

Test Modes		
Band	Radiated TCs	Conducted TCs
GSM 850	■ GSM Link ■ EDGE class 8 Link	■ GSM Link ■ EDGE class 8 Link
GSM 1900	■ GSM Link ■ EDGE class 8 Link	■ GSM Link ■ EDGE class 8 Link
WCDMA Band V	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link
WCDMA Band II	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link
WCDMA Band IV	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link
CDMA BC0	■ 1xRTT Link	■ 1xRTT Link
CDMA BC1	■ 1xRTTLink	■ 1xRTT Link

2.2 Connection Diagram of Test System

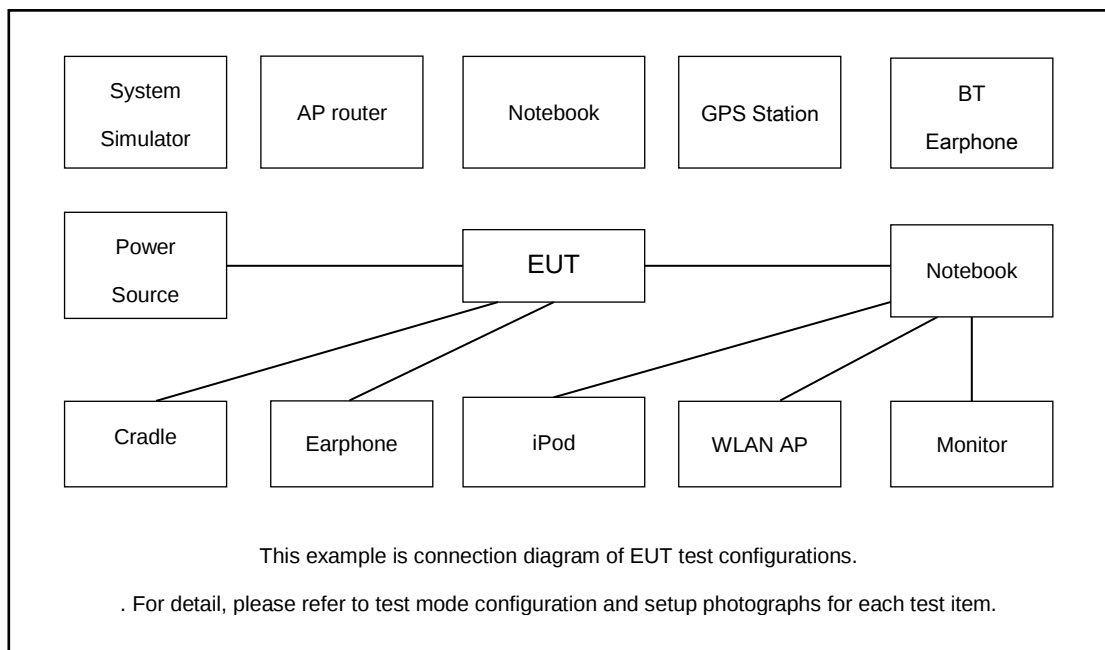

2.3 Support Unit used in test configuration

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	DC Power Supply	GW INSTEK	GPS-3030D	N/A	N/A	Unshielded, 1.8 m



2.4 Frequency List of Low/Middle/High Channels

Frequency List				
Band	Channel/Frequency(MHz)	Lowest	Middle	Highest
GSM850	Channel	128	189	251
	Frequency	824.2	836.4	848.8
WCDMA Band V	Channel	4132	4182	4233
	Frequency	826.4	836.4	846.6
GSM1900	Channel	512	661	810
	Frequency	1850.2	1880.0	1909.8
WCDMA Band II	Channel	9262	9400	9538
	Frequency	1852.4	1880.0	1907.6
WCDMA Band IV	Channel	1312	1413	1513
	Frequency	1712.4	1732.6	1752.6
CDMA200 BC0	Channel	1013	384	777
	Frequency	824.7	836.52	848.31
CDMA200 BC1	Channel	25	600	1175
	Frequency	1851.25	1880.0	1908.75

3 Conducted Test Result

3.1 Measuring Instruments

See list of measuring instruments of this test report.

3.2 Test Setup

3.2.1 Conducted Output Power



3.3 Test Result of Conducted Test

Please refer to Appendix A.

3.4 Conducted Output Power and ERP/EIRP

3.4.1 Description of the Conducted Output Power and ERP/EIRP

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts for GSM850 and WCDMA Band V.

The EIRP of mobile transmitters must not exceed 2 Watts for GSM1900 and WCDMA Band II.

The EIRP of mobile transmitters must not exceed 1 Watts for WCDMA Band IV.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2
2. The transmitter output port was connected to the system simulator.
3. Set EUT at maximum power through the system simulator.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure and record the power level from the system simulator.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Nov. 02, 2019	Aug. 30, 2020	Nov. 01, 2020	Conducted (TH01-KS)
Thermal Chamber	Ten Billion	TTC-B3S	TBN-960502	-40~+150°C	Oct. 28, 2019	Aug. 30, 2020	Oct. 27, 2020	Conducted (TH01-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150244	10Hz-44G, MAX 30dB	Apr. 15, 2020	Aug. 03, 2020	Apr. 14, 2021	Radiation (03CH04-KS)
Bilog Antenna	TeseQ	CBL6111D	49922	30MHz-1GHz	Jan. 03, 2020	Aug. 03, 2020	Jan. 02, 2021	Radiation (03CH04-KS)
Horn Antenna	Schwarzbeck	BBHA9120D	1356	1GHz~18GHz	Apr. 20, 2020	Aug. 03, 2020	Apr. 19, 2021	Radiation (03CH04-KS)
SHF-EHF Horn	Com-power	AH-840	101115	18GHz~40GHz	Nov. 10, 2019	Aug. 03, 2020	Nov. 09, 2020	Radiation (03CH04-KS)
Amplifier	SONOMA	310N	187289	9KHz-1GHz	Jan. 03, 2020	Aug. 03, 2020	Jan. 02, 2021	Radiation (03CH04-KS)
Amplifier	MITEQ	EM18G40G GA	060728	18~40GHz	Jan. 08, 2020	Aug. 03, 2020	Jan. 07, 2021	Radiation (03CH04-KS)
high gain Amplifier	MITEQ	AMF-7D-00 101800-30-1	2025788	1Ghz-18Ghz	Jan. 03, 2020	Aug. 03, 2020	Jan. 02, 2021	Radiation (03CH04-KS)
Amplifier	Keysight	83017A	MY57280106	500MHz~26.5GHz	Oct. 15, 2019	Aug. 03, 2020	Oct. 14, 2020	Radiation (03CH04-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Aug. 03, 2020	NCR	Radiation (03CH04-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Aug. 03, 2020	NCR	Radiation (03CH04-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Aug. 03, 2020	NCR	Radiation (03CH04-KS)

NCR: No Calibration Required

5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage $K=2$ to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.3dB
---	-------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.8dB
---	-------



Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power)

Conducted Power (*Unit: dBm)						
Band	GSM850			GSM1900		
Channel	128	189	251	512	661	810
Frequency	824.2	836.4	848.8	1850.2	1880.0	1909.8
GSM	32.16	32.33	32.32	29.45	29.14	29.03
GPRS 1 Tx slots	32.15	32.22	32.30	29.43	29.13	29.02
GPRS 2 Tx slots	29.87	30.00	30.20	26.72	26.40	26.33
GPRS 3 Tx slots	27.66	27.85	28.04	24.60	24.26	24.20
GPRS 4 Tx slots	26.23	26.46	26.66	23.30	22.94	22.90
EGPRS 1 Tx slots	27.23	27.22	27.24	25.62	25.64	25.91
EGPRS 2 Tx slots	24.03	24.04	24.07	22.47	22.53	22.82
EGPRS 3 Tx slots	22.13	22.08	22.18	20.27	20.28	20.70
EGPRS 4 Tx slots	20.74	20.80	20.72	19.24	19.21	19.53

Conducted Power (*Unit: dBm)									
Band	WCDMA Band V			WCDMA Band II			WCDMA Band IV		
Channel	4132	4182	4233	9262	9400	9538	1312	1413	1513
Frequency	826.4	836.4	846.6	1852.4	1880	1907.6	1712.4	1732.6	1752.6
AMR 12.2K	23.41	23.43	23.41	22.10	22.23	22.21	20.54	20.67	20.65
RMC 12.2K	23.43	23.46	23.44	22.12	22.25	22.24	20.59	20.69	20.67
HSDPA Subtest-1	22.84	22.72	22.85	21.53	21.55	21.66	19.96	19.99	20.05
HSDPA Subtest-2	22.89	22.71	22.84	21.45	21.59	21.65	19.95	19.98	20.10
HSDPA Subtest-3	22.38	22.23	22.41	21.07	21.10	21.15	19.44	19.48	19.60
HSDPA Subtest-4	22.35	22.24	22.34	20.96	21.03	21.20	19.43	19.49	19.55
DC-HSDPA Subtest-1	22.79	22.69	22.83	21.48	21.52	21.64	19.91	19.96	20.03
DC-HSDPA Subtest-2	22.84	22.68	22.82	21.40	21.56	21.63	19.90	19.95	20.08
DC-HSDPA Subtest-3	22.33	22.20	22.39	21.02	21.07	21.13	19.39	19.45	19.58
DC-HSDPA Subtest-4	22.30	22.21	22.32	20.91	21.00	21.18	19.38	19.46	19.53
HSUPA Subtest-1	21.69	21.78	21.63	21.46	21.55	21.67	19.91	20.00	19.85
HSUPA Subtest-2	19.70	19.77	19.42	19.43	19.56	19.66	17.92	17.99	17.64
HSUPA Subtest-3	20.72	20.75	20.65	20.45	20.53	20.70	18.94	18.97	18.87
HSUPA Subtest-4	19.72	19.77	19.34	19.44	19.60	19.74	17.94	17.99	17.56
HSUPA Subtest-5	21.68	21.78	21.76	21.50	21.60	21.70	19.90	20.00	19.98



Conducted Power (*Unit: dBm)						
Band	CDMA 2000 BC0			CDMA 2000 BC1		
Channel	1013	384	777	25	600	1175
Frequency	824.7	836.52	848.31	1851.25	1880	1908.75
1xRTT RC1 SO55	22.38	22.61	22.79	21.78	21.72	21.91
1xRTT RC3 SO55	22.36	22.56	22.69	21.77	21.70	21.78
1xRTT RC3 SO32 (+ F-SCH)	22.71	22.70	22.68	21.89	21.73	21.90
1xRTT RC3 SO32 (+SCH)	22.73	22.67	22.69	21.83	21.71	21.87
1xEVDO RTAP 153.6Kbps	22.78	22.79	22.77	21.76	21.91	21.66
1xEVDO RETAP 4096Bits	22.67	22.66	22.73	21.72	21.60	21.59

ERP/EIRP

GSM850 ($G_T - L_C = 0.90$ dB)			
Channel	128	189	251
	(Low)	(Mid)	(High)
Frequency	824.2	836.4	848.8
(MHz)			
Conducted Power (dBm)	32.16	32.33	32.32
Conducted Power (Watts)	1.6444	1.7100	1.7061
ERP(dBm)	30.91	31.08	31.07
ERP(Watts)	1.2331	1.2823	1.2794

EDGE850 ($G_T - L_C = 0.90$ dB)			
Channel	128	189	251
	(Low)	(Mid)	(High)
Frequency	824.2	836.4	848.8
(MHz)			
Conducted Power (dBm)	27.23	27.22	27.24
Conducted Power (Watts)	0.5284	0.5272	0.5297
ERP(dBm)	25.98	25.97	25.99
ERP(Watts)	0.3963	0.3954	0.3972



GSM1900 ($G_T - L_C = -0.40$ dB)			
Channel	512	661	810
	(Low)	(Mid)	(High)
Frequency	1850.2	1880	1909.8
(MHz)			
Conducted Power (dBm)	29.45	29.14	29.03
Conducted Power (Watts)	0.8810	0.8204	0.7998
EIRP(dBm)	29.05	28.74	28.63
EIRP(Watts)	0.8035	0.7482	0.7295

EDGE1900 ($G_T - L_C = -0.40$ dB)			
Channel	512	661	810
	(Low)	(Mid)	(High)
Frequency	1850.2	1880	1909.8
(MHz)			
Conducted Power (dBm)	25.62	25.64	25.91
Conducted Power (Watts)	0.3648	0.3664	0.3899
EIRP(dBm)	25.22	25.24	25.51
EIRP(Watts)	0.3327	0.3342	0.3556



WCDMA Band V ($G_T - L_C = 0.90$ dB)			
Channel	4132	4182	4233
	(Low)	(Mid)	(High)
Frequency	826.4	836.4	846.6
(MHz)			
Conducted Power (dBm)	23.43	23.46	23.44
Conducted Power (Watts)	0.2203	0.2218	0.2208
ERP(dBm)	22.18	22.21	22.19
ERP(Watts)	0.1652	0.1663	0.1656

WCDMA Band II ($G_T - L_C = -0.40$ dB)			
Channel	9262	9400	9538
	(Low)	(Mid)	(High)
Frequency	1852.4	1880	1907.6
(MHz)			
Conducted Power (dBm)	22.12	22.25	22.24
Conducted Power (Watts)	0.1629	0.1679	0.1675
EIRP(dBm)	21.72	21.85	21.84
EIRP(Watts)	0.1486	0.1531	0.1528

WCDMA Band IV ($G_T - L_C = 2.50$ dB)			
Channel	1312	1413	1513
	(Low)	(Mid)	(High)
Frequency	1712.4	1732.6	1752.6
(MHz)			
Conducted Power (dBm)	20.59	20.69	20.67
Conducted Power (Watts)	0.1146	0.1172	0.1167
EIRP(dBm)	23.09	23.19	23.17
EIRP(Watts)	0.2037	0.2084	0.2075



CDMA 2000 BC0 ($G_T - L_C = 0.90$ dB)			
Channel	1013	384	777
	(Low)	(Mid)	(High)
Frequency	824.7	836.52	848.31
(MHz)			
Conducted Power (dBm)	22.38	22.61	22.79
Conducted Power (Watts)	0.1730	0.1824	0.1901
ERP(dBm)	21.13	21.36	21.54
ERP(Watts)	0.1297	0.1368	0.1426

CDMA 2000 BC1 ($G_T - L_C = -0.40$ dB)			
Channel	25	600	1175
	(Low)	(Mid)	(High)
Frequency	1851.25	1880	1908.75
(MHz)			
Conducted Power (dBm)	21.78	21.72	21.91
Conducted Power (Watts)	0.1507	0.1486	0.1552
EIRP(dBm)	21.38	21.32	21.51
EIRP(Watts)	0.1374	0.1355	0.1416



Appendix C. Reference Report

Please refer to Sporton report number FG850409A which is issued separately.