

P45 WCDMA II_RMC12.2K_Rear Face_1cm_Ch9538

Communication System: WCDMA ; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: HSL1750_0906 Medium parameters used: $f = 1908$ MHz; $\sigma = 1.452$ S/m; $\epsilon_r = 38.672$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5°C; Liquid Temperature : 22.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(8.9, 8.9, 8.9) @ 1907.6 MHz; Calibrated: 9/28/2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1633; Calibrated: 9/28/2020
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2018
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

- **Area Scan (71x131x1)**: Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 1.92 W/kg


- **Zoom Scan (5x5x7)/Cube 0**: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 4.709 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 2.11 W/kg

SAR(1 g) = 1.14 W/kg; SAR(10 g) = 0.617 W/kg

Maximum value of SAR (measured) = 1.75 W/kg

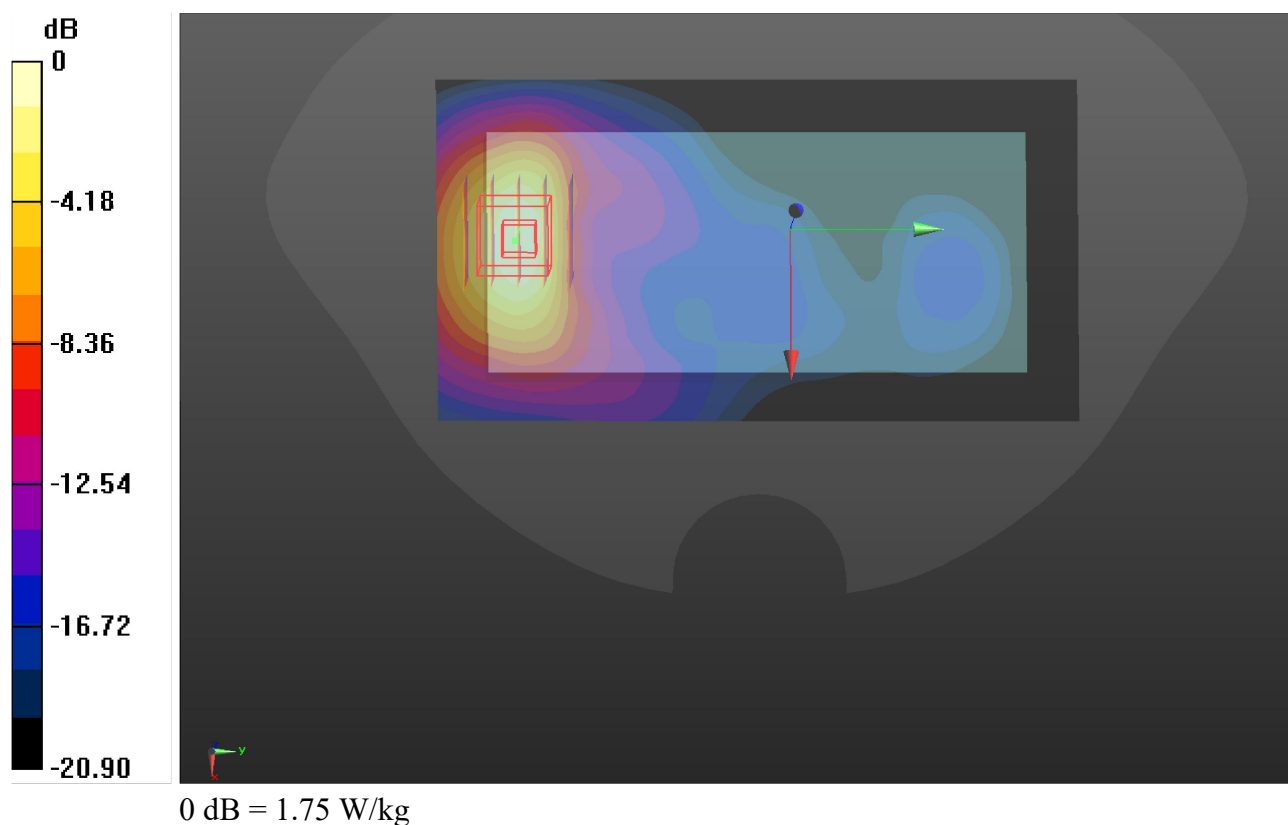

P46 WCDMA IV_RMC12.2K_Rear Face_1cm_Ch1312

Communication System: WCDMA; Frequency: 1712.4 MHz; Duty Cycle: 1:1

Medium: HSL1750_0906 Medium parameters used: $f = 1712.4$ MHz; $\sigma = 1.32$ S/m; $\epsilon_r = 40.911$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5°C; Liquid Temperature : 22.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(9.08, 9.08, 9.08) @ 1712.4 MHz; Calibrated: 9/28/2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1633; Calibrated: 9/28/2020
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2018
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

- **Area Scan (71x131x1)**: Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 1.84 W/kg


- **Zoom Scan (5x5x7)/Cube 0**: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 3.341 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 2.03 W/kg

SAR(1 g) = 1.16 W/kg; SAR(10 g) = 0.629 W/kg

Maximum value of SAR (measured) = 1.70 W/kg

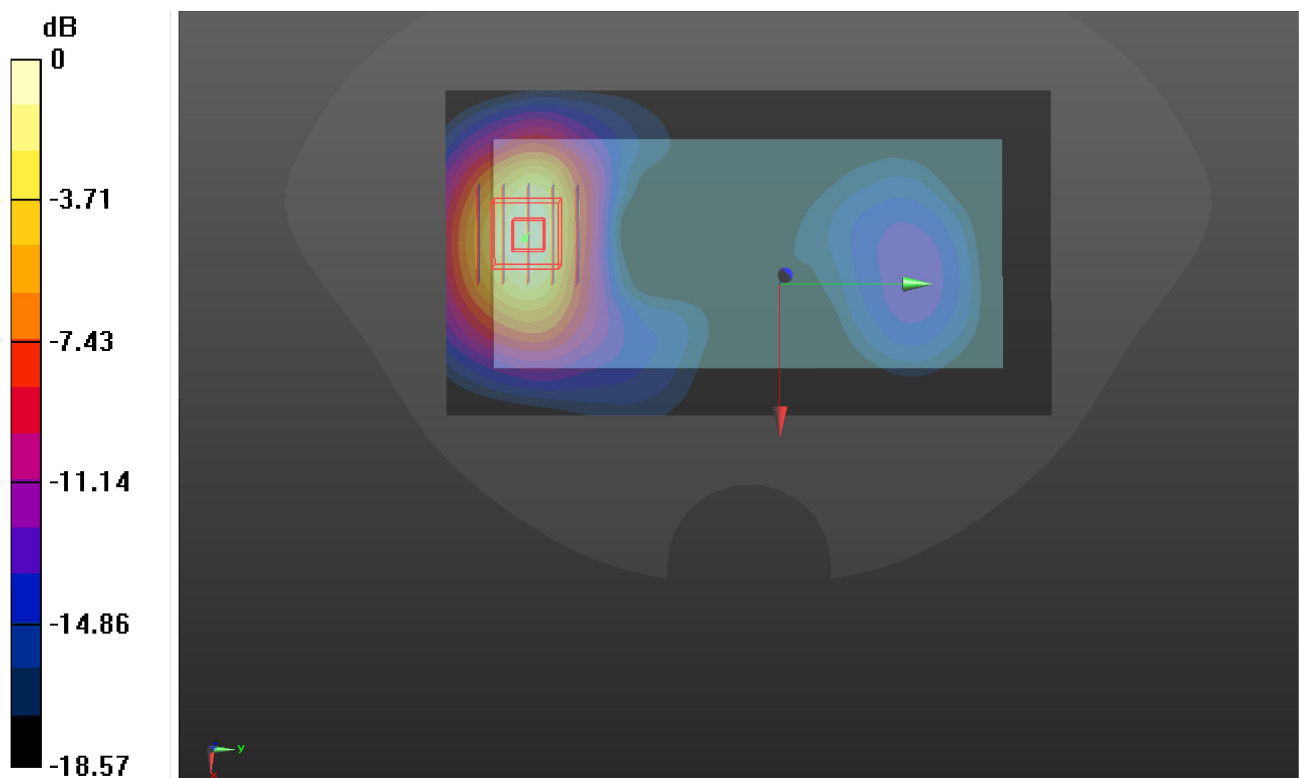

0 dB = 1.70 W/kg

P47 WCDMA V_RMC12.2K_Rear Face_1cm_Ch4132

Communication System: WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: HSL835_0907 Medium parameters used: $f = 826.4$ MHz; $\sigma = 0.902$ S/m; $\epsilon_r = 40.11$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5°C; Liquid Temperature : 22.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(10.73, 10.73, 10.73) @ 826.4 MHz; Calibrated: 9/28/2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1633; Calibrated: 9/28/2020
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2018
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

-Area Scan (71x131x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.402 W/kg


-Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 18.36 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.434 W/kg

SAR(1 g) = 0.324 W/kg; SAR(10 g) = 0.241 W/kg

Maximum value of SAR (measured) = 0.394 W/kg

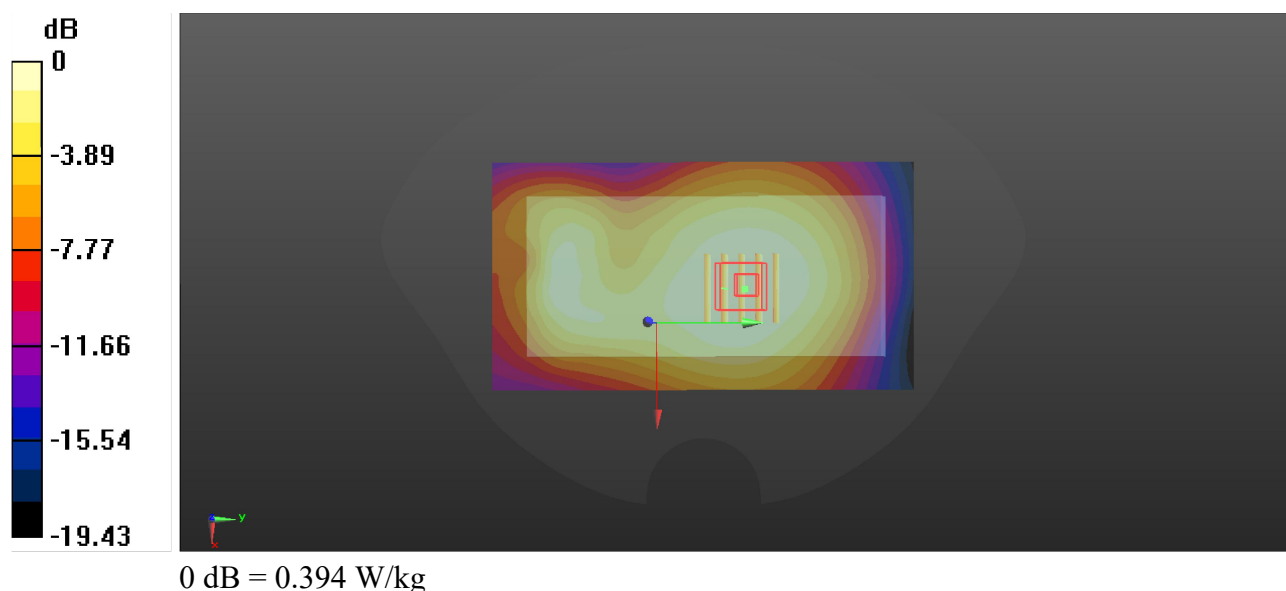

P48 LTE 5_QPSK10M_Rear Face_1cm_Ch20525_1RB_OS49

Communication System: LTE ; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: HSL835_0907 Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.905$ S/m; $\epsilon_r = 40.08$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5°C; Liquid Temperature : 22.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(10.73, 10.73, 10.73) @ 836.5 MHz; Calibrated: 9/28/2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1633; Calibrated: 9/28/2020
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2018
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

-Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.436 W/kg


-Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.44 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.479 W/kg

SAR(1 g) = 0.358 W/kg; SAR(10 g) = 0.266 W/kg

Maximum value of SAR (measured) = 0.438 W/kg

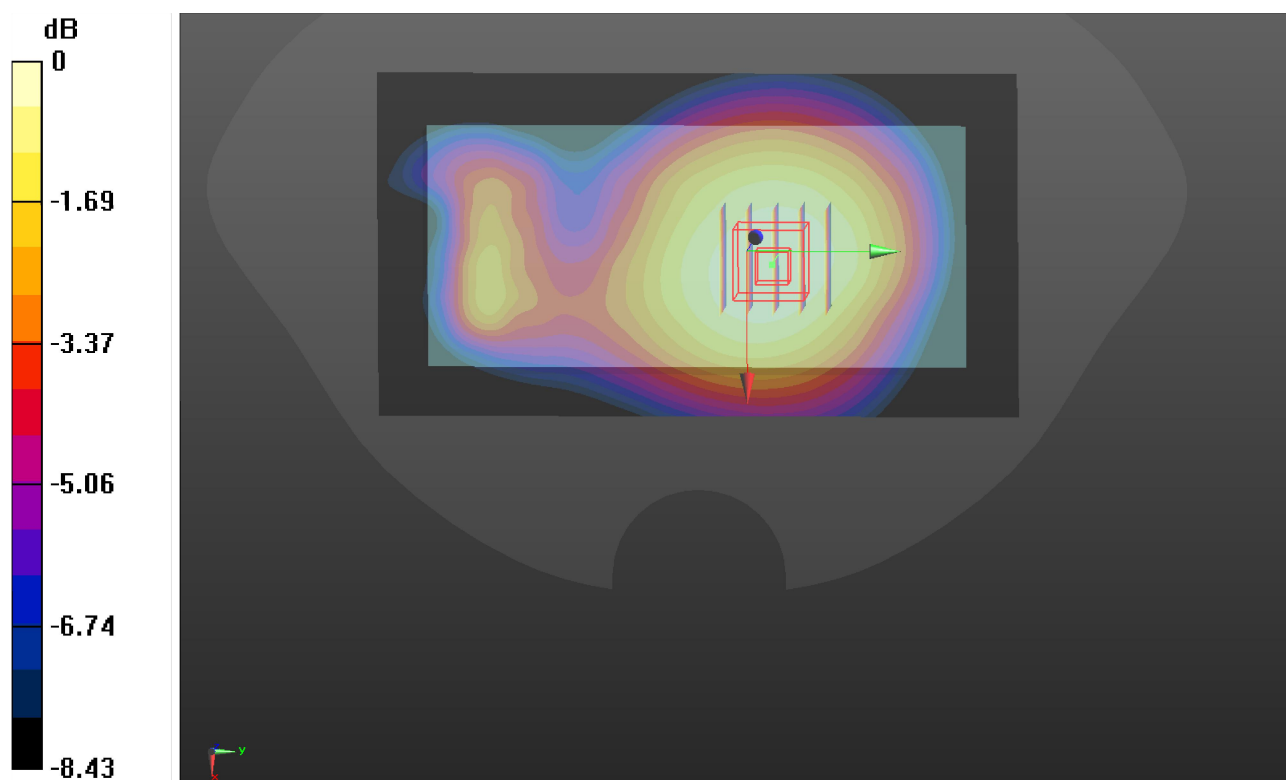

0 dB = 0.438 W/kg

P49 LTE 7_QPSK20M_Bottom Side_1cm_Ch21350_1RB_OS0

Communication System: LTE ; Frequency: 2560 MHz; Duty Cycle: 1:1

Medium: HSL2600_0908 Medium parameters used: $f = 2560$ MHz; $\sigma = 1.922$ S/m; $\epsilon_r = 39.57$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4°C; Liquid Temperature : 22.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(7.82, 7.82, 7.82) @ 2593 MHz; Calibrated: 9/28/2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1633; Calibrated: 9/28/2020
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2018
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

- **Area Scan (41x81x1)**: Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 1.88 W/kg


- **Zoom Scan (7x7x7)/Cube 0**: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 21.22 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 2.35 W/kg

SAR(1 g) = 1.09 W/kg; SAR(10 g) = 0.597 W/kg

Maximum value of SAR (measured) = 1.90 W/kg

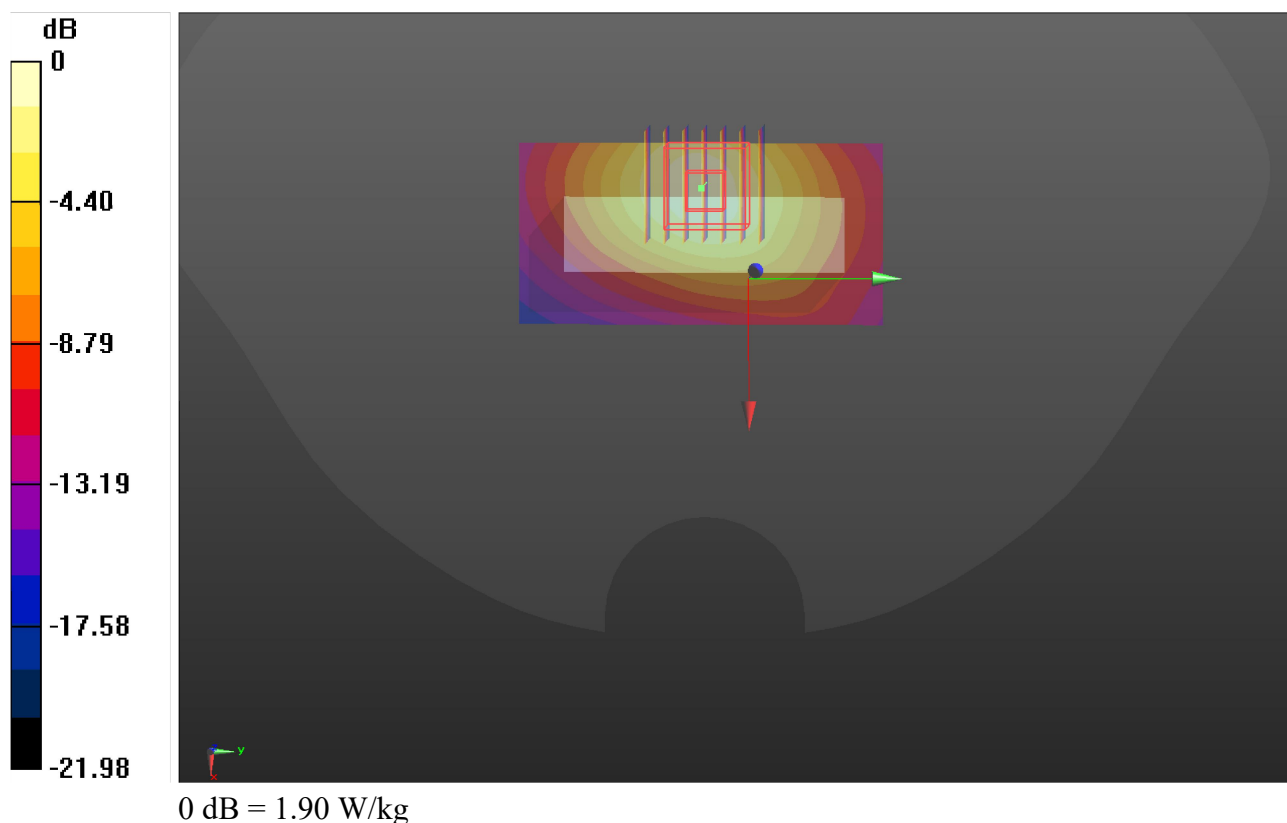

P50 LTE 12_QPSK10M_Rear Face_1cm_Ch23060_1RB_OS0

Communication System: LTE (0); Frequency: 704 MHz; Duty Cycle: 1:1

Medium: HSL750_0907 Medium parameters used: $f = 704$ MHz; $\sigma = 0.865$ S/m; $\epsilon_r = 40.391$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5°C; Liquid Temperature : 22.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(11.02, 11.02, 11.02) @ 704 MHz; Calibrated: 9/28/2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1633; Calibrated: 9/28/2020
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2018
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

-Area Scan (71x131x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.297 W/kg


-Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 17.00 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.325 W/kg

SAR(1 g) = 0.245 W/kg; SAR(10 g) = 0.184 W/kg

Maximum value of SAR (measured) = 0.298 W/kg

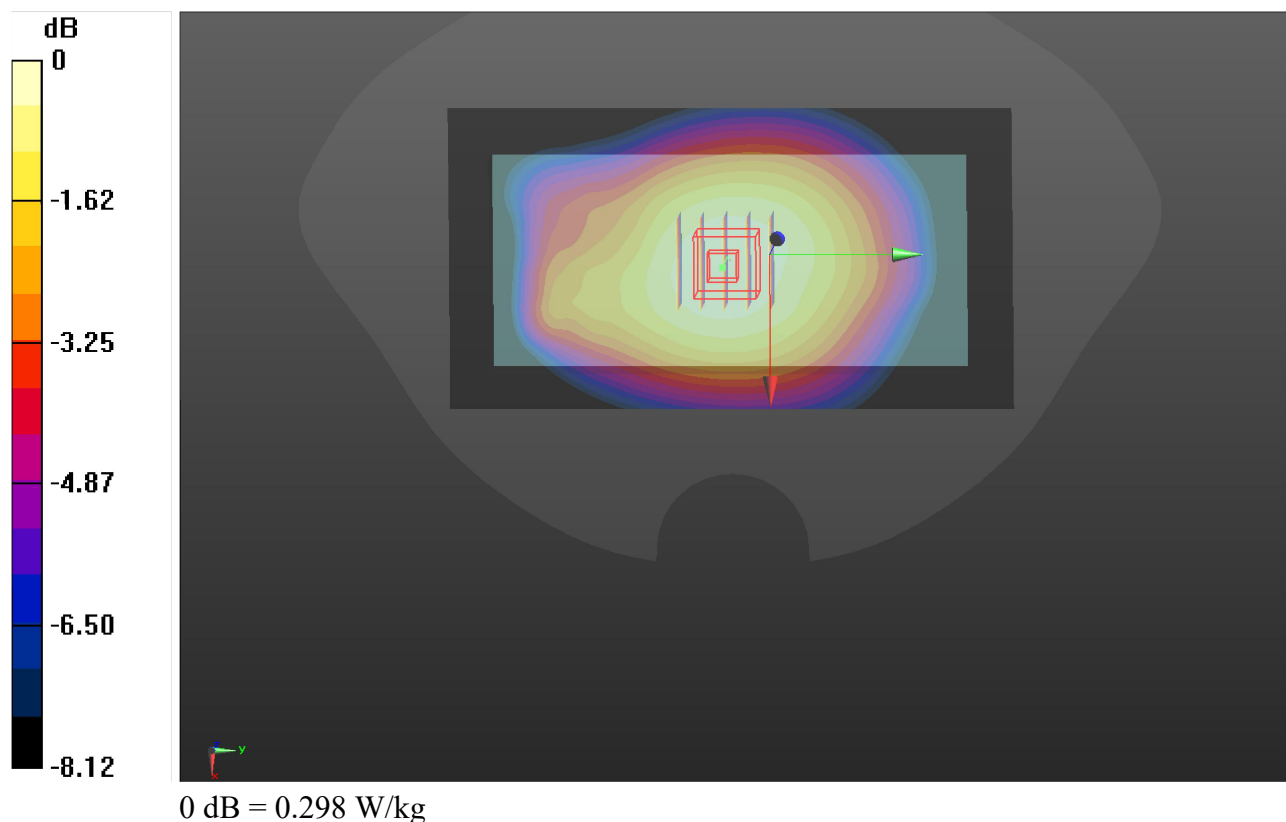

P51 LTE 13_QPSK10M_Rear Face_1cm_Ch23230_1RB_OS0

Communication System: LTE; Frequency: 782 MHz; Duty Cycle: 1:1

Medium: HSL750_0907 Medium parameters used: $f = 782$ MHz; $\sigma = 0.884$ S/m; $\epsilon_r = 40.291$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5°C; Liquid Temperature : 22.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(11.02, 11.02, 11.02) @ 782 MHz; Calibrated: 9/28/2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1633; Calibrated: 9/28/2020
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2018
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

-Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.593 W/kg


-Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.50 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.645 W/kg

SAR(1 g) = 0.472 W/kg; SAR(10 g) = 0.350 W/kg

Maximum value of SAR (measured) = 0.582 W/kg

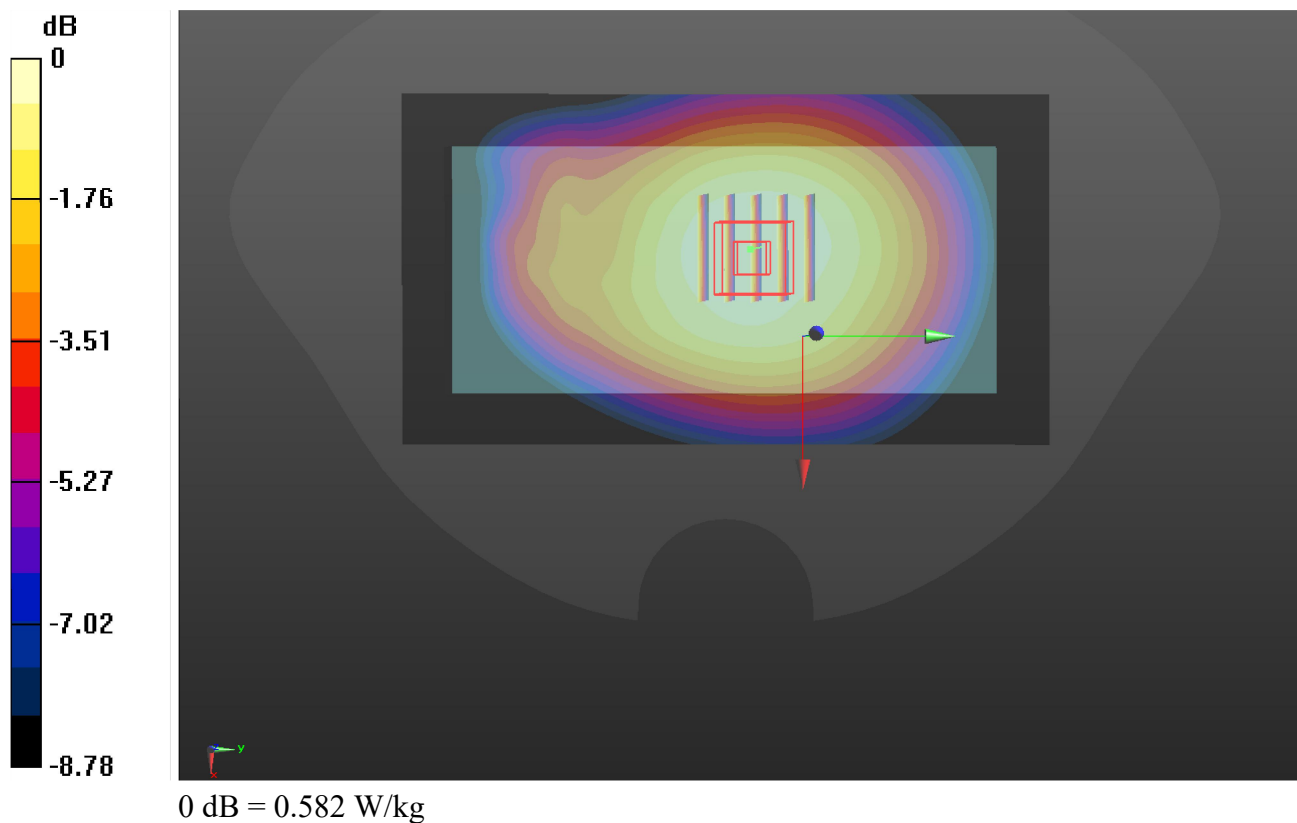

P52 LTE 14_QPSK10M_Rear Face_1cm_Ch23330_1RB_OS0

Communication System: LTE ; Frequency: 793 MHz; Duty Cycle: 1:1

Medium: HSL750_0907 Medium parameters used: $f = 793$ MHz; $\sigma = 0.889$ S/m; $\epsilon_r = 40.263$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5°C; Liquid Temperature : 22.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(11.02, 11.02, 11.02) @ 793 MHz; Calibrated: 9/28/2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1633; Calibrated: 9/28/2020
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2018
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

-Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.423 W/kg


-Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.43 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.463 W/kg

SAR(1 g) = 0.338 W/kg; SAR(10 g) = 0.251 W/kg

Maximum value of SAR (measured) = 0.418 W/kg

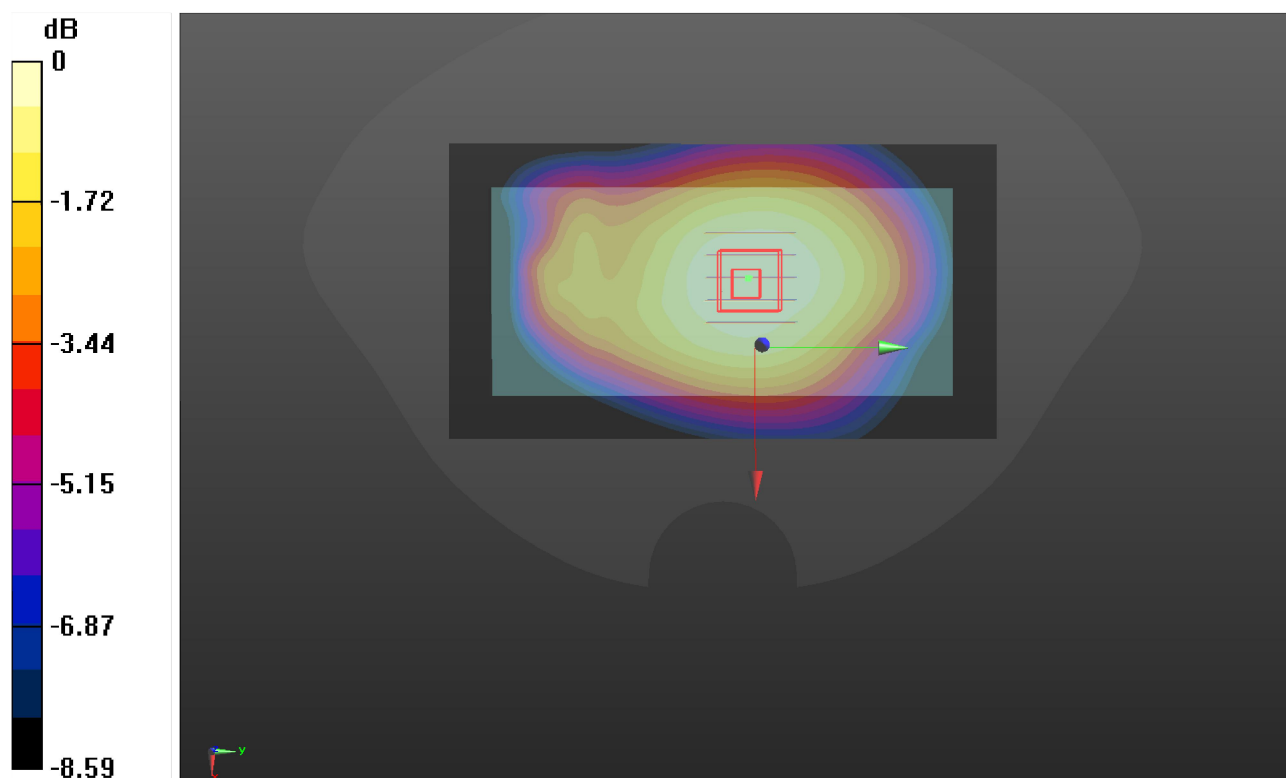

0 dB = 0.418 W/kg

P53 LTE 25_QPSK20M_Rear Face_1cm_Ch26590_1RB_OS0

Communication System: LTE ; Frequency: 1905 MHz; Duty Cycle: 1:1

Medium: HSL1900_0906 Medium parameters used: $f = 1905$ MHz; $\sigma = 1.453$ S/m; $\epsilon_r = 38.682$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5°C; Liquid Temperature : 22.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(8.9, 8.9, 8.9) @ 1905 MHz; Calibrated: 9/28/2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1633; Calibrated: 9/28/2020
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2018
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

-Area Scan (71x131x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 1.23 W/kg


-Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 3.729 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.46 W/kg

SAR(1 g) = 0.815 W/kg; SAR(10 g) = 0.433 W/kg

Maximum value of SAR (measured) = 1.21 W/kg

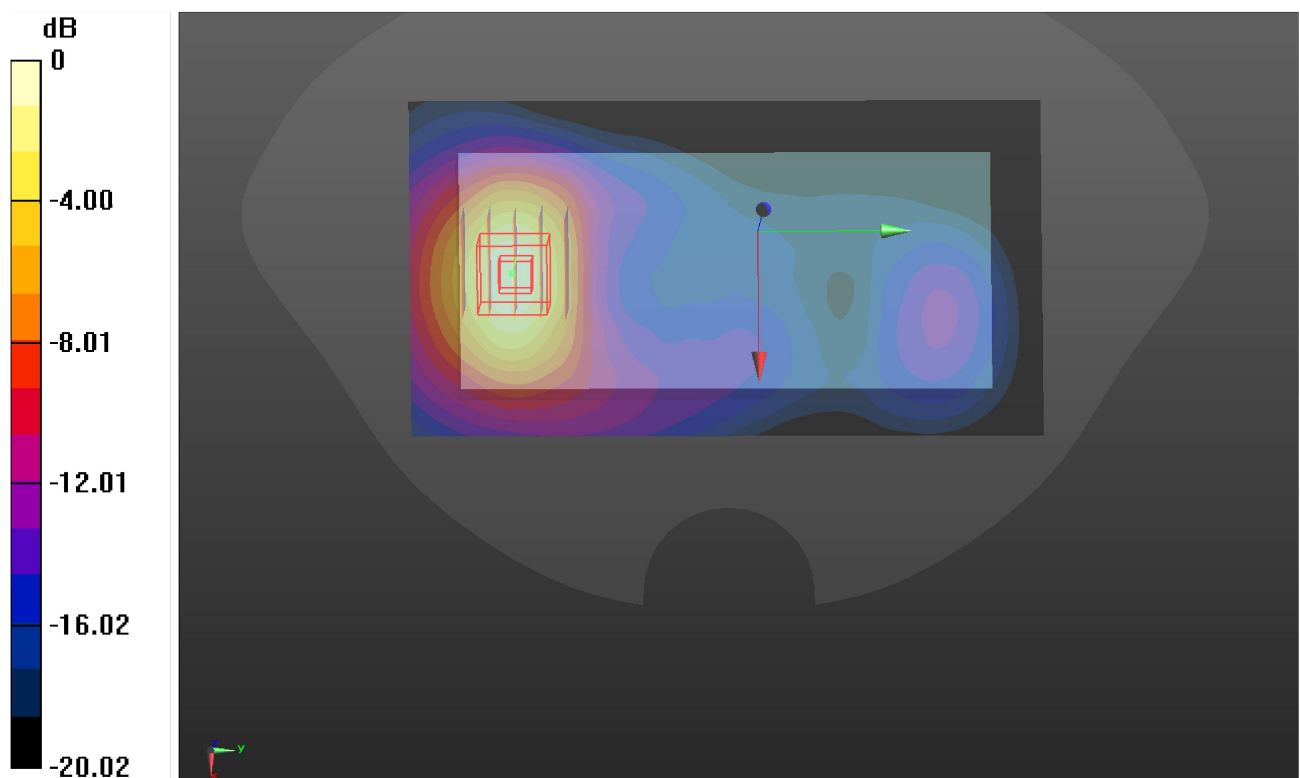

0 dB = 1.21 W/kg

P54 LTE 26_QPSK15M_Rear Face_1cm_Ch26865_1RB_OS74

Communication System: LTE ; Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: HSL835_0907 Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.904$ S/m; $\epsilon_r = 40.101$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5°C; Liquid Temperature : 22.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(10.73, 10.73, 10.73) @ 831.5 MHz; Calibrated: 9/28/2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1633; Calibrated: 9/28/2020
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2018
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

-Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.313 W/kg


-Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.39 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.342 W/kg

SAR(1 g) = 0.246 W/kg; SAR(10 g) = 0.181 W/kg

Maximum value of SAR (measured) = 0.308 W/kg

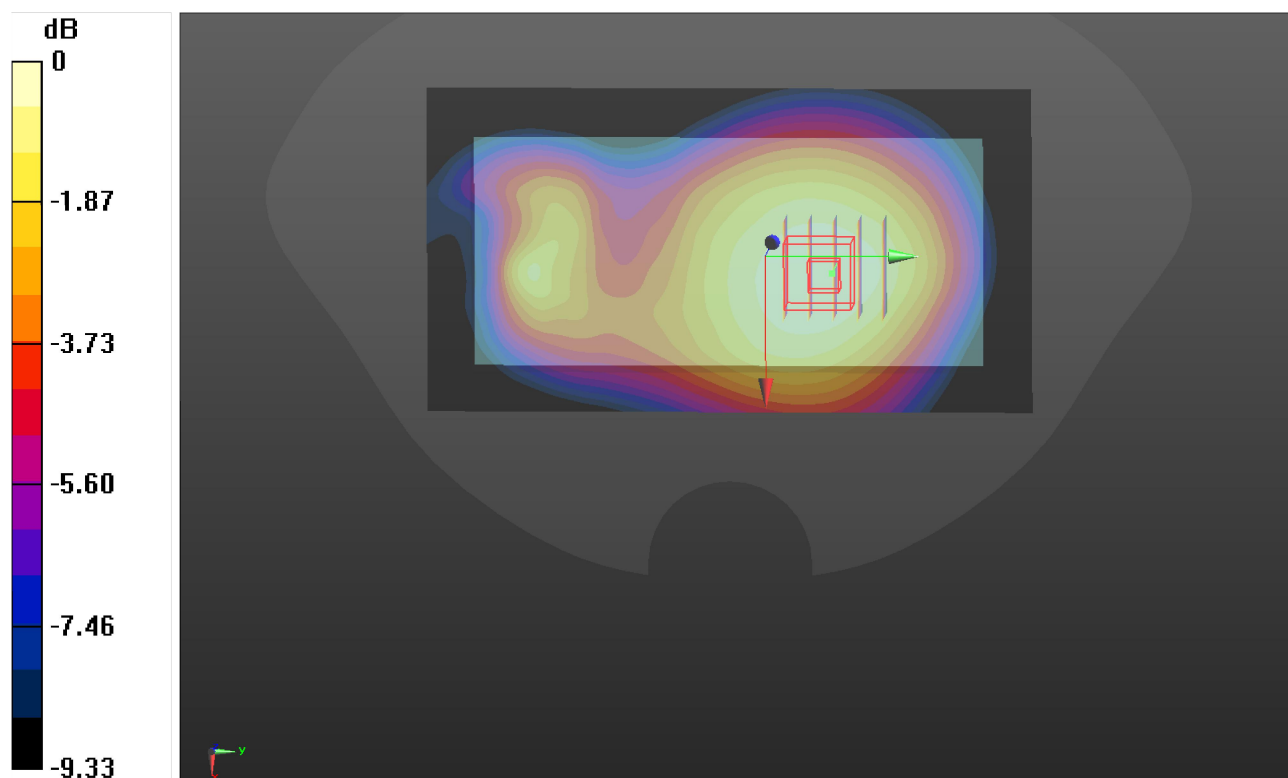

0 dB = 0.308 W/kg

0 dB = 1.51 W/kg

P56 LTE 41_QPSK20M_Rear Face_1cm_Ch40620_1RB_OS0

Communication System: LTE; Frequency: 2593 MHz; Duty Cycle: 1:1.59

Medium: HSL2600_0908 Medium parameters used : $f = 2593$ MHz; $\sigma = 1.956$ S/m; $\epsilon_r = 39.43$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4°C; Liquid Temperature : 22.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(7.82, 7.82, 7.82) @ 2593 MHz; Calibrated: 9/28/2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1633; Calibrated: 9/28/2020
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2018
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

- **Area Scan (41x81x1):** Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.871 W/kg


- **Zoom Scan (7x7x7)/Cube 0:** Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.514 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.1 W/kg

SAR(1 g) = 0.575 W/kg; SAR(10 g) = 0.296 W/kg

Maximum value of SAR (measured) = 0.873 W/kg

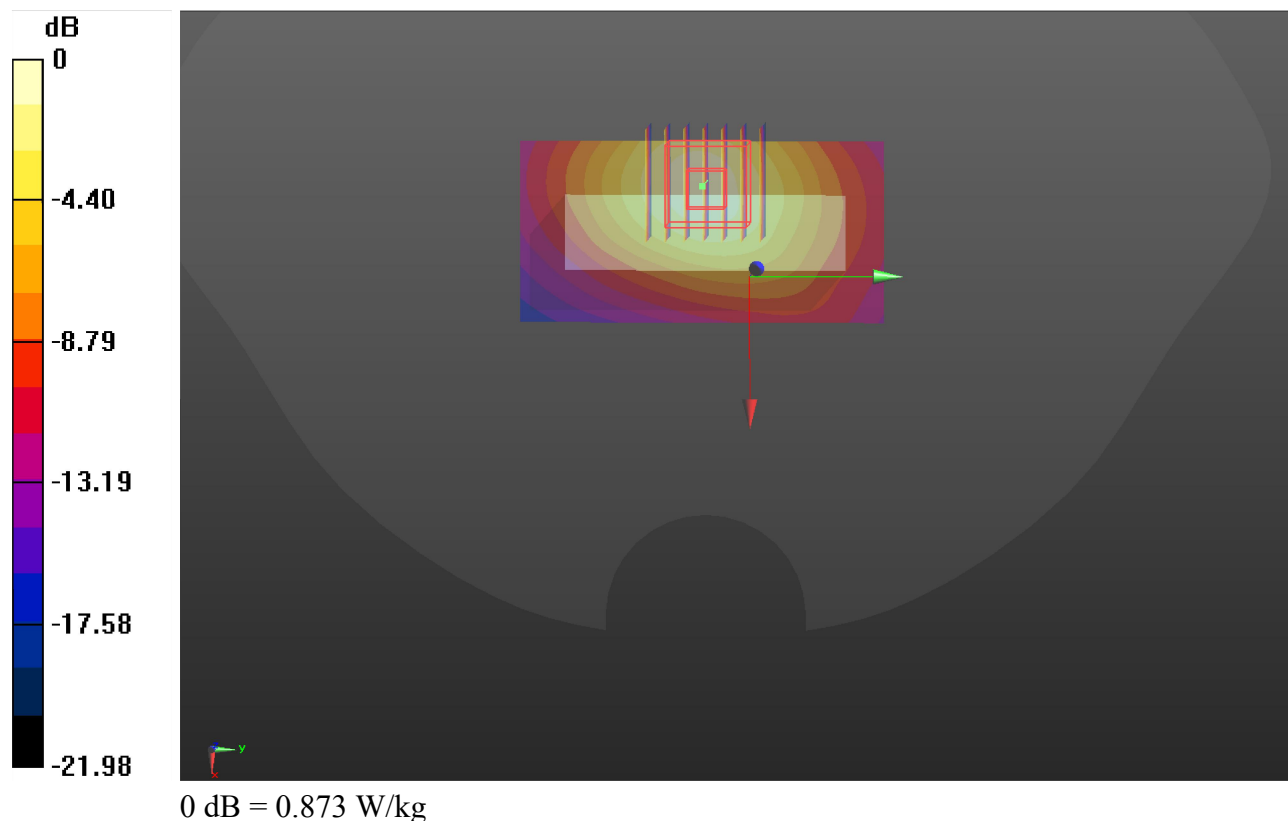

P57 LTE 66_QPSK20M_Rear Face_1cm_Ch132072_1RB_OS50

Communication System: LTE; Frequency: 1720 MHz; Duty Cycle: 1:1

Medium: HSL1750_0906 Medium parameters used: $f = 1720$ MHz; $\sigma = 1.326$ S/m; $\epsilon_r = 40.88$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5°C; Liquid Temperature : 22.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(9.08, 9.08, 9.08) @ 1720 MHz; Calibrated: 9/28/2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1633; Calibrated: 9/28/2020
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2018
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

-Area Scan (71x131x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 1.50 W/kg


-Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 3.185 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 1.68 W/kg

SAR(1 g) = 0.947 W/kg; SAR(10 g) = 0.512 W/kg

Maximum value of SAR (measured) = 1.42 W/kg

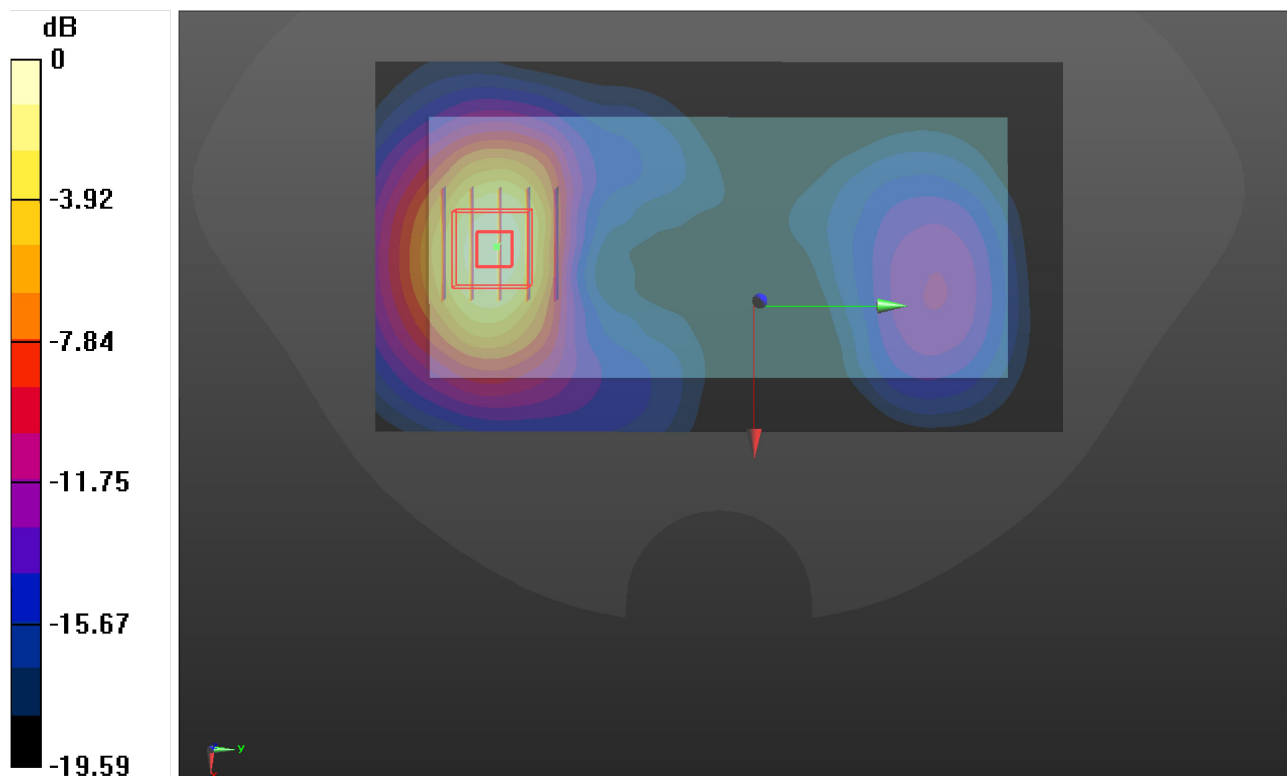

0 dB = 1.42 W/kg

P58 LTE 71_QPSK20M_Rear Face_1cm_Ch133372_1RB_OS50

Communication System: LTE; Frequency: 688 MHz; Duty Cycle: 1:1

Medium: HSL750_0907 Medium parameters used: $f = 688$ MHz; $\sigma = 0.865$ S/m; $\epsilon_r = 44.085$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5°C; Liquid Temperature : 22.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(11.02, 11.02, 11.02) @ 688 MHz; Calibrated: 9/28/2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1633; Calibrated: 9/28/2020
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2018
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

- **Area Scan (71x131x1)**: Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.432 W/kg


- **Zoom Scan (5x5x7)/Cube 0**: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 20.48 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.478 W/kg

SAR(1 g) = 0.347 W/kg; SAR(10 g) = 0.258 W/kg

Maximum value of SAR (measured) = 0.429 W/kg

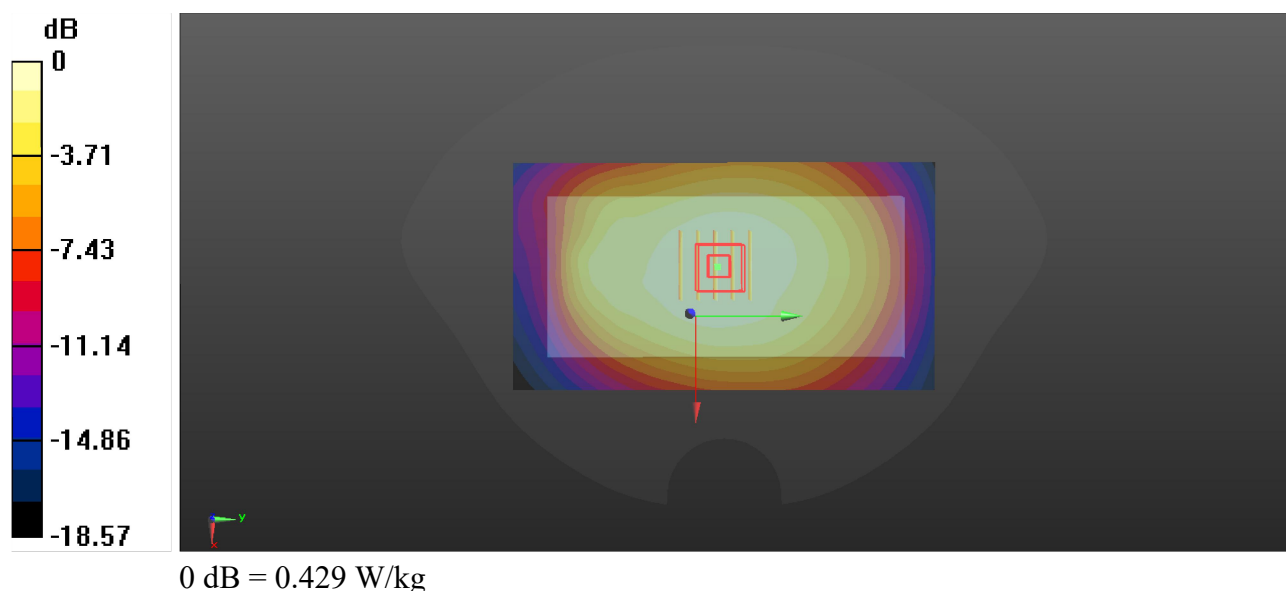

P59 WLAN2.4G_802.11b_Right Side_1cm_Ch11

Communication System: 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: HSL2450_0908 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.813$ S/m; $\epsilon_r = 39.949$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4°C; Liquid Temperature : 22.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(8, 8, 8) @ 2462 MHz; Calibrated: 9/28/2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1633; Calibrated: 9/28/2020
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2018
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

-Area Scan (41x161x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.144 W/kg


-Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 4.617 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.184 W/kg

SAR(1 g) = 0.088 W/kg; SAR(10 g) = 0.043 W/kg

Maximum value of SAR (measured) = 0.144 W/kg

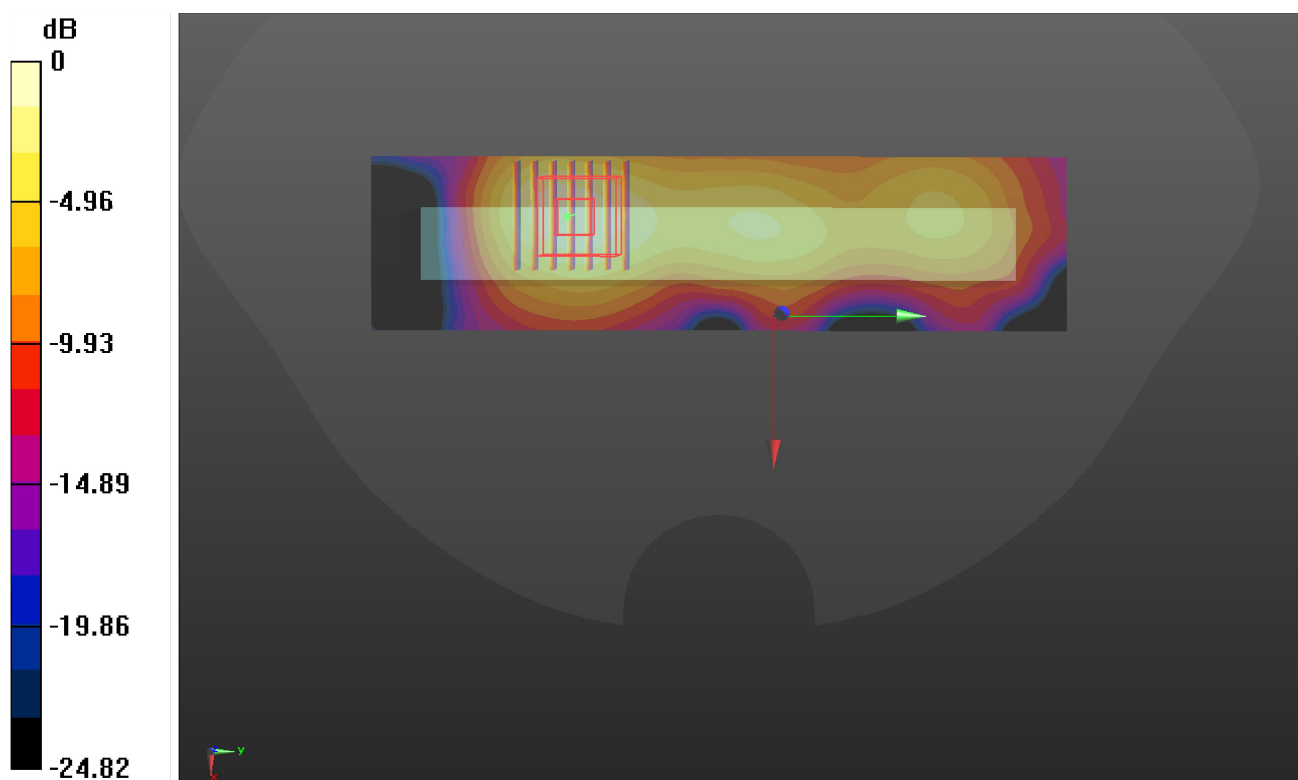

P60 WLAN5G_802.11a_Right Side_1cm_Ch44

Communication System: 802.11a; Frequency: 5220 MHz; Duty Cycle: 1:1.03

Medium: HSL5G_0908 Medium parameters used : $f = 5220$ MHz; $\sigma = 4.695$ S/m; $\epsilon_r = 37.374$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4°C; Liquid Temperature : 22.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(5.66, 5.66, 5.66) @ 5220 MHz; Calibrated: 9/28/2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1633; Calibrated: 9/28/2020
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2018
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

- **Area Scan (51x191x1)**: Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 2.55 W/kg


- **Zoom Scan (7x7x12)/Cube 0**: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 2.873 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 4.01 W/kg

SAR(1 g) = 1.02 W/kg; SAR(10 g) = 0.363 W/kg

Maximum value of SAR (measured) = 2.53 W/kg

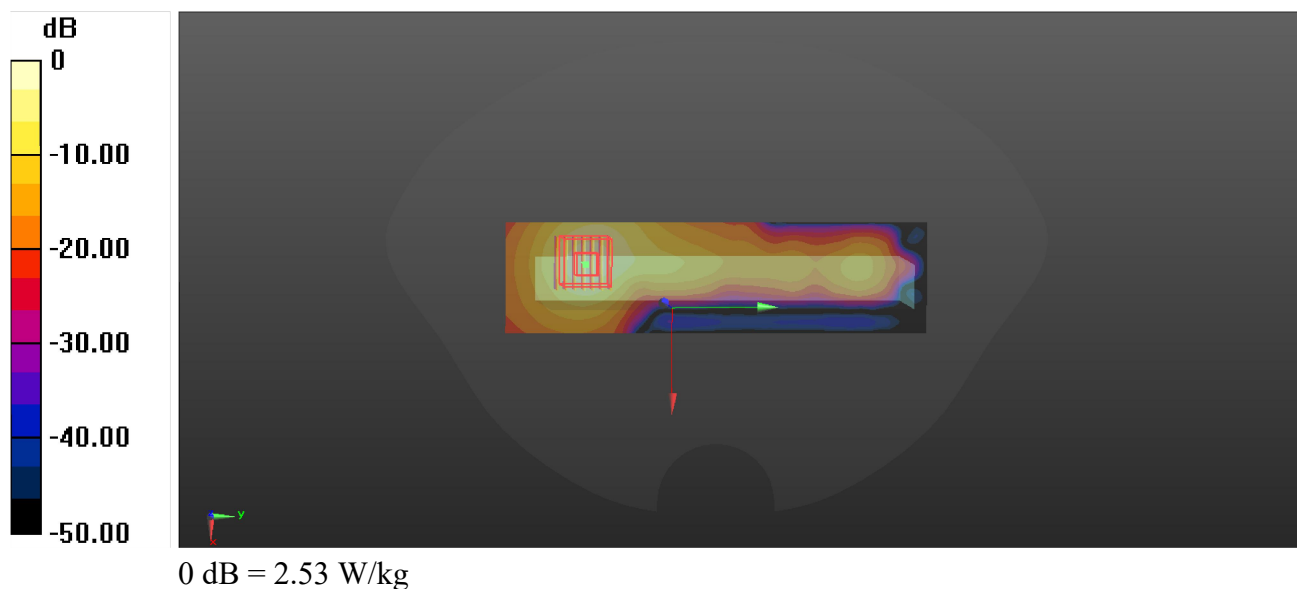

P61 WLAN5G_802.11a_Rear Face_1cm_Ch149

Communication System: 802.11a; Frequency: 5745 MHz; Duty Cycle: 1:1

Medium: HSL5G_0908 Medium parameters used: $f = 5745$ MHz; $\sigma = 5.217$ S/m; $\epsilon_r = 36.631$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5°C; Liquid Temperature : 22.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(5.05, 5.05, 5.05) @ 5745 MHz; Calibrated: 9/28/2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1633; Calibrated: 9/28/2020
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2018
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

-Area Scan (101x191x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 1.02 W/kg


-Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 1.220 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.72 W/kg

SAR(1 g) = 0.425 W/kg; SAR(10 g) = 0.171 W/kg

Maximum value of SAR (measured) = 0.968 W/kg

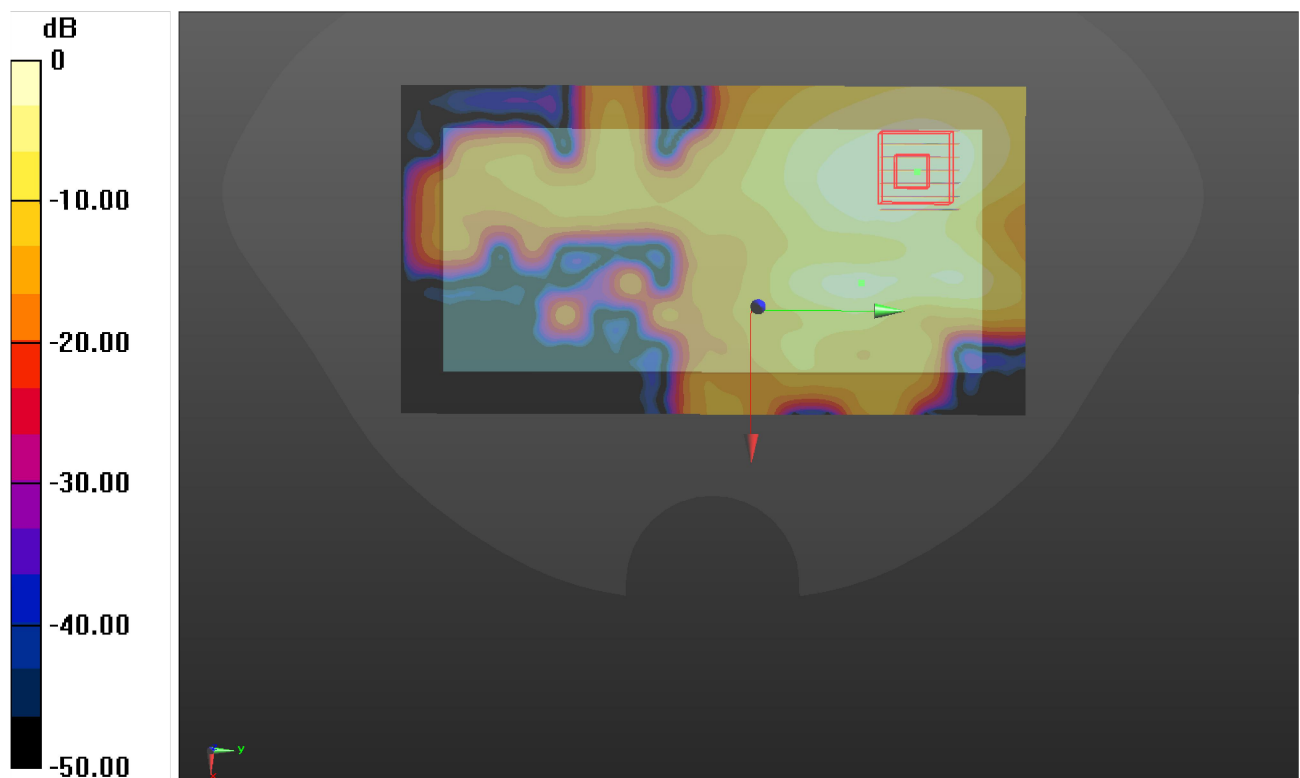

0 dB = 0.968 W/kg