



SAR EVALUATION REPORT

**FCC 47 CFR § 2.1093
IEEE Std 1528-2013**

For
Dolphin CT50

**FCC ID: HD5-CT50L0N
Model Name: CT50L0N**

**Report Number: 15U20259-S2A
Issue Date: 7/6/2015**

Prepared for
**HONEYWELL INTERNATIONAL INC
9680 OLD BAILES ROAD
FORT MILL, SOUTH CAROLINA 29715, UNITED STATES**

Prepared by
**UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History

Rev.	Date	Revisions	Revised By
--	6/19/2015	Initial Issue	--
A	7/6/2015	Updated to include Extremity SAR	AJ Newcomer

Table of Contents

1.	Attestation of Test Results.....	5
2.	Test Specification, Methods and Procedures.....	6
3.	Facilities and Accreditation.....	6
4.	SAR Measurement System & Test Equipment	7
4.1.	<i>SAR Measurement System</i>	<i>7</i>
4.2.	<i>SAR Scan Procedures.....</i>	<i>8</i>
4.3.	<i>Test Equipment</i>	<i>10</i>
5.	Measurement Uncertainty	11
6.	Device Under Test (DUT) Information	12
6.1.	<i>DUT Description</i>	<i>12</i>
6.2.	<i>Wireless Technologies</i>	<i>12</i>
6.3.	<i>Nominal and Maximum Output Power</i>	<i>13</i>
7.	RF Exposure Conditions (Test Configurations)	14
8.	Dielectric Property Measurements & System Check	15
8.1.	<i>Dielectric Property Measurements.....</i>	<i>15</i>
8.2.	<i>System Check.....</i>	<i>17</i>
9.	Conducted Output Power Measurements.....	19
9.1.	<i>Wi-Fi 2.4GHz (DTS Band)</i>	<i>19</i>
9.2.	<i>Wi-Fi 5GHz (U-NII Bands)</i>	<i>20</i>
9.3.	<i>Bluetooth</i>	<i>21</i>
10.	Measured and Reported (Scaled) SAR Results.....	22
10.1.	<i>Wi-Fi (DTS Band).....</i>	<i>24</i>
10.2.	<i>Wi-Fi (U-NII Band).....</i>	<i>24</i>
10.3.	<i>Bluetooth.....</i>	<i>25</i>
11.	SAR Measurement Variability	26
12.	Simultaneous Transmission SAR Analysis	26
	Appendixes.....	27
	<i>A_15U20259v1 SAR Photos & Ant. Locations</i>	<i>27</i>
	<i>B_15U20259v1 SAR System Check Plots</i>	<i>27</i>
	<i>C_15U20259v1 SAR Highest Test Plots.....</i>	<i>27</i>
	<i>D_15U20259v0 SAR Tissue Ingredients.....</i>	<i>27</i>
	<i>E_15U20259v0 SAR Probe Cal. Certificates</i>	<i>27</i>

F_15U20259v1 SAR Dipole Cal. Certificates..... 27

1. Attestation of Test Results

Applicant Name	HONEYWELL INTERNATIONAL INC			
FCC ID	HD5-CT50L0N			
Model Name	CT50L0N			
Applicable Standards	FCC 47 CFR § 2.1093 Published RF exposure KDB procedures IEEE Std 1528-2013			
SAR Limits (W/Kg)				
Exposure Category	Peak spatial-average(1g of tissue)		Extremities (hands, wrists, ankles, etc.) (10g of tissue)	
General population / Uncontrolled exposure	1.6		4.0	
The Highest Reported SAR (W/kg)				
RF Exposure Conditions	Equipment Class			
	Licensed	DTS	U-NII	DSS (BT)
Head	N/A	0.454	0.243	N/A
Body-worn		0.089	0.251	
Extremity		0.321	0.509	
Simultaneous TX		N/A		
Date Tested	5/11/2015 to 5/18/2015; 6/29/2015 to 7/3/2015			
Test Results	Pass			
UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report. Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government (NIST Handbook 150, Annex A). This report is written to support regulatory compliance of the applicable standards stated above.				
Approved & Released By:		Prepared By:		
				
Devin Chang Senior Engineer UL Verification Services Inc.		AJ Newcomer Laboratory Technician UL Verification Services Inc.		

2. Test Specification, Methods and Procedures

The tests documented in this report were performed in accordance with FCC 47 CFR § 2.1093, IEEE STD 1528-2013, the following FCC Published RF exposure [KDB](#) procedures:

- 248227 D01 802.11 Wi-Fi SAR v02
- 447498 D01 General RF Exposure Guidance v05r02
- 447498 D03 Supplement C Cross-Reference
- 648474 D04 Handset SAR v01r02
- 680106 D01 RF Exposure Wireless Charging Apps v02
- 690783 D01 SAR Listings on Grants v01r03
- 865664 D01 SAR measurement 100 MHz to 6 GHz v01r03
- 865664 D02 RF Exposure Reporting v01r01

3. Facilities and Accreditation

The test sites and measurement facilities used to collect data are located at


47173 Benicia Street	47266 Benicia Street
SAR Lab A	SAR Lab 1
SAR Lab B	SAR Lab 2
SAR Lab C	SAR Lab 3
SAR Lab D	SAR Lab 4
SAR Lab E	SAR Lab 5
SAR Lab F	
SAR Lab G	
SAR Lab H	

UL Verification Services Inc. is accredited by [NVLAP](#), Laboratory Code 200065-0.

4. SAR Measurement System & Test Equipment

4.1. SAR Measurement System

The DASY5 system used for performing compliance tests consists of the following items:

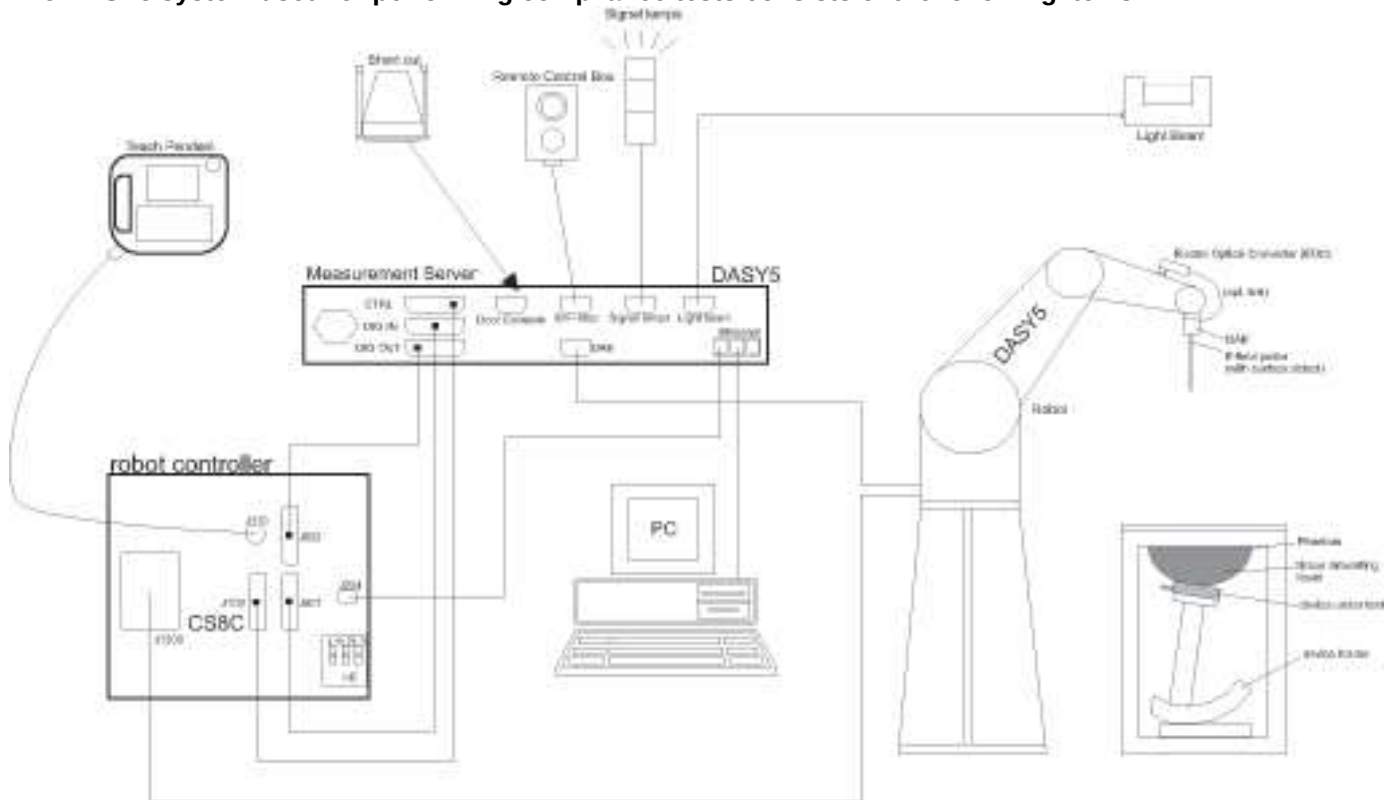

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

4.2. SAR Scan Procedures

Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 2.1 mm. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE Standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

Area Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

Step 3: Zoom Scan

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The Zoom Scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

Zoom Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <u>reported</u> SAR from the area scan based 1-g SAR estimation procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

Step 4: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

Step 5: Z-Scan (FCC only)

The Z Scan measures points along a vertical straight line. The line runs along the Z-axis of a one-dimensional grid. In order to get a reasonable extrapolation the extrapolated distance should not be larger than the step size in Z-direction.

4.3. Test Equipment

The measuring equipment used to perform the tests documented in this report has been calibrated in accordance with the manufacturers' recommendations, and is traceable to recognized national standards.

Dielectric Property Measurements

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Network Analyzer	Agilent	E753ES	MY40000980	4/17/2016
Dielectric Probe kit	SPEAG	DAK-3.5	1082	9/16/2015
Shorting block	SPEAG	DAK-3.5 Short	SM DAK 200 BA	N/A
Thermometer	Control Company	Traceable	122529163	10/8/2015

System Check

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
HP Signal Generator	HP	8665B	3546A00784	6/23/2015
Power Meter	HP	437B	3125U09516	10/6/2015
Power Meter	Agilent	N1911A	MY53060016	8/7/2015
Power Sensor	Agilent	N1921A	MY53260010	7/12/2015
Power Sensor	Agilent	8481A	3318A95392	10/6/2015
Amplifier	MITEQ	AMF-4D-00400600-50-30P	1622052	N/A
Bi-directional coupler	Werlatone, Inc.	C8060-102	2711	N/A
DC Power Supply	Sorensen Ametek	XT20-3	1318A00530	N/A
Synthesized Signal Generator	Agilent	8665B	3438A00633	7/10/2015
Power Meter	HP	437B	3125U11347	8/27/2015
Power Meter	HP	437B	3125U16345	6/16/2015
Power Sensor	HP	8481A	2702A60780	6/16/2015
Power Sensor	HP	8481A	1926A16917	10/10/2015
Amplifier	MITEQ	AMF-4D-00400600-50-30P	1808938	N/A
Bi-directional coupler	Werlatone, Inc.	C8060-102	2710	N/A
DC Power Supply	HP	6296A	2841A-05955	N/A
E-Field Probe (SAR Lab 1)	SPEAG	EX3DV4	3929	4/22/2016
E-Field Probe (SAR Lab 4)	SPEAG	EX3DV4	3989	3/17/2016
Data Acquisition Electronics (SAR Lab 1)	SPEAG	DAE4	1352	11/7/2015
Data Acquisition Electronics (SAR Lab 4)	SPEAG	DAE4	1377	8/27/2015
System Validation Dipole	SPEAG	D2450V2	899	3/13/2016
System Validation Dipole	SPEAG	D5GHzV2	1168	12/4/2015
Thermometer (SAR Lab 1)	EXTECH	445703	CCS-205	3/20/2016
Thermometer (SAR Lab 4)	EXTECH	445703	CCS-238	6/3/2015

Other

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Power Meter	Agilent	N1911A	MY53060007	9/15/2015
Power Sensor	Agilent	N1921A	MY53260010	7/12/2015
Base Station Simulator	R & S	CMW500	132910	10/16/2015

The following test equipment was used during test dates 6/29/2015 to 7/3/2015

Dielectric Property Measurements

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Network Analyzer	Agilent	E753ES	MY40000980	4/17/2016
Dielectric Probe kit	SPEAG	DAK-3.5	1082	9/16/2015
Shorting block	SPEAG	DAK-3.5 Short	SM DAK 200 BA	N/A
Thermometer	Control Company	Traceable	122529163	10/8/2015

System Check

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Synthesized Signal Generator	Agilent	8665B	3438A00633	7/10/2015
Power Meter	HP	437B	3125U09516	8/27/2015
Power Meter	HP	437B	3125U11347	10/6/2015
Power Sensor	HP	8481A	3318A95392	10/6/2015
Power Sensor	HP	8481A	1926A16917	10/10/2015
Amplifier	MITEQ	AMF-4D-00400600-50-30P	1808938	N/A
Bi-directional coupler	Werlatone, Inc.	C8060-102	2710	N/A
DC Power Supply	HP	6296A	2841A-05955	N/A
E-Field Probe (SAR Lab 4)	SPEAG	EX3DV4	3989	3/17/2016
Data Acquisition Electronics (SAR Lab 4)	SPEAG	DAE4	1377	8/27/2015
System Validation Dipole	SPEAG	D2450V2	706	5/11/2016
System Validation Dipole	SPEAG	D5GHzV2	1168	12/4/2015
Thermometer (SAR Lab 4)	EXTECH	445703	CCS-238	6/5/2016

5. Measurement Uncertainty

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval.

6. Device Under Test (DUT) Information

6.1. DUT Description

Device Dimension	Overall (Length x Width): 160 mm x 82.5 mm Overall Diagonal: 165 mm Display Diagonal: 118 mm
Battery Options	☒ Standard – Lithium-ion battery, Rating 3.6Vdc, 14.5Wh ☐ Extended (large capacity) ☐ The rechargeable battery is not user accessible.
Wireless Router (Hotspot)	Wi-Fi Hotspot mode permits the device to share its cellular data connection with other Wi-Fi-enabled devices. ☐ Mobile Hotspot (Wi-Fi 2.4 GHz) ☐ Mobile Hotspot (Wi-Fi 5 GHz)
Wi-Fi Direct	Wi-Fi Direct enabled devices transfer data directly between each other ☐ Wi-Fi Direct (Wi-Fi 2.4 GHz) ☐ Wi-Fi Direct (Wi-Fi 5 GHz)

6.2. Wireless Technologies

Wireless technologies	Frequency bands	Operating mode	Duty Cycle used for SAR testing
Wi-Fi	2.4 GHz	802.11b 802.11g 802.11n (HT20)	100%
	5 GHz	802.11a 802.11n (HT20) 802.11n (HT40) 802.11ac (VHT20) 802.11ac (VHT40) 802.11ac (VHT80)	100%
	Does this device support bands 5.60 ~ 5.65 GHz? ☒ Yes ☐ No		
	Does this device support Band gap channel(s)? ☐ Yes ☒ No		
Bluetooth	2.4 GHz	Version 4.0 LE	77.5% (DH5)

6.3. Nominal and Maximum Output Power

KDB 447498 sec.4.1.(3) at the maximum rated output power and within the tune-up tolerance range specified for the product, but not more than 2 dB lower than the maximum tune-up tolerance limit

Upper limit (dB): -2.0 ~ 0.5		Max. RF Output Power (dBm)	
RF Air interface	Mode	Target	Max. tune-up tolerance limit
WiFi 2.4 GHz	802.11b	15.0	15.5
	802.11g	11.5	12.0
	802.11n HT20	9.5	10.0
Wi-Fi 5.2/5.3/5.5 GHz	802.11a	14.0	14.5
	802.11n HT20	14.0	14.5
	802.11n HT40	14.0	14.5
	802.11ac VHT20	14.0	14.5
	802.11ac VHT40	14.0	14.5
	802.11ac VHT80	14.0	14.5
WiFi 5.8 GHz	802.11a	11.5	12.0
	802.11n HT20	11.5	12.0
	802.11n HT40	11.5	12.0
	802.11ac VHT20	11.5	12.0
	802.11ac VHT40	11.5	12.0
	802.11ac VHT80	11.5	12.0
Upper limit (dB): -2.0 ~ 2.0		Max. RF Output Power (dBm)	
RF Air interface	Mode	Target	Max. tune-up tolerance limit
Bluetooth		6.0	8.0
Bluetooth LE		1.0	3.0

7. RF Exposure Conditions (Test Configurations)

Refer to “SAR Photos and Ant locations” Appendix for the specific details of the antenna-to-antenna and antenna-to-edge(s) distances.

Standard

Wireless technologies	RF Exposure Conditions	DUT-to-User Separation	Test Position	Antenna-to-edge/surface	SAR Required	Note
WLAN	Head	0 mm	Left Touch	N/A	Yes	
			Left Tilt (15°)	N/A	Yes	
			Right Touch	N/A	Yes	
			Right Tilt (15°)	N/A	Yes	
	Body	15 mm	Rear	N/A	Yes	
			Front	N/A	Yes	

Extremity

Wireless technologies	RF Exposure Conditions	DUT-to-User Separation	Test Position	Antenna-to-edge/surface	SAR Required	Note
WLAN	Body	0 mm	Rear	< 25 mm	Yes	
			Edge 1	< 25 mm	Yes	
			Edge 2	> 25 mm	No	
			Edge 3	> 25 mm	No	
			Edge 4	< 25 mm	Yes	

8. Dielectric Property Measurements & System Check

8.1. Dielectric Property Measurements

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within $\pm 2^\circ\text{C}$ of the temperature when the tissue parameters are characterized.

The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3 – 4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.

Tissue dielectric parameters were measured at the low, middle and high frequency of each operating frequency range of the test device.

Tissue Dielectric Parameters

FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

Target Frequency (MHz)	Head		Body	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5000	36.2	4.45	49.3	5.07
5100	36.1	4.55	49.1	5.18
5200	36.0	4.66	49.0	5.30
5300	35.9	4.76	48.9	5.42
5400	35.8	4.86	48.7	5.53
5500	35.6	4.96	48.6	5.65
5600	35.5	5.07	48.5	5.77
5700	35.4	5.17	48.3	5.88
5800	35.3	5.27	48.2	6.00

IEEE Std 1528-2013

Refer to Table 3 within the IEEE Std 1528-2013

Dielectric Property Measurements Results:**SAR Lab 1**

Date	Freq. (MHz)	Liquid Parameters			Measured	Target	Delta (%)	Limit ±(%)
5/11/2015	Head 5180	e'	37.5500	Relative Permittivity (ϵ_r):	37.55	36.01	4.27	5
		e"	16.4800	Conductivity (σ):	4.75	4.63	2.51	5
	Head 5200	e'	37.3200	Relative Permittivity (ϵ_r):	37.32	35.99	3.69	5
		e"	16.2500	Conductivity (σ):	4.70	4.65	1.02	5
	Head 5600	e'	36.9600	Relative Permittivity (ϵ_r):	36.96	35.53	4.01	5
		e"	16.4500	Conductivity (σ):	5.12	5.06	1.22	5
	Head 5800	e'	36.7800	Relative Permittivity (ϵ_r):	36.78	35.30	4.19	5
		e"	16.4600	Conductivity (σ):	5.31	5.27	0.73	5
	Head 5825	e'	36.7400	Relative Permittivity (ϵ_r):	36.74	35.30	4.08	5
		e"	16.6900	Conductivity (σ):	5.41	5.27	2.57	5
5/12/2015	Body 5180	e'	48.1900	Relative Permittivity (ϵ_r):	48.19	49.05	-1.75	5
		e"	18.8400	Conductivity (σ):	5.43	5.27	2.94	5
	Body 5200	e'	48.2400	Relative Permittivity (ϵ_r):	48.24	49.02	-1.59	5
		e"	18.6700	Conductivity (σ):	5.40	5.29	1.95	5
	Body 5600	e'	47.0200	Relative Permittivity (ϵ_r):	47.02	48.48	-3.01	5
		e"	18.7600	Conductivity (σ):	5.84	5.76	1.40	5
	Body 5800	e'	46.6400	Relative Permittivity (ϵ_r):	46.64	48.20	-3.24	5
		e"	18.9100	Conductivity (σ):	6.10	6.00	1.64	5
	Body 5825	e'	46.6700	Relative Permittivity (ϵ_r):	46.67	48.20	-3.17	5
		e"	19.1900	Conductivity (σ):	6.22	6.00	3.59	5

SAR Lab 4

Date	Freq. (MHz)	Liquid Parameters			Measured	Target	Delta (%)	Limit ±(%)
5/12/2015	Head 2450	e'	38.4000	Relative Permittivity (ϵ_r):	38.40	39.20	-2.04	5
		e"	13.5700	Conductivity (σ):	1.85	1.80	2.70	5
	Head 2410	e'	38.6900	Relative Permittivity (ϵ_r):	38.69	39.28	-1.50	5
		e"	13.6400	Conductivity (σ):	1.83	1.76	3.83	5
	Head 2475	e'	38.3100	Relative Permittivity (ϵ_r):	38.31	39.17	-2.19	5
		e"	13.8900	Conductivity (σ):	1.91	1.83	4.62	5
5/12/2015	Body 2450	e'	50.5800	Relative Permittivity (ϵ_r):	50.58	52.70	-4.02	5
		e"	14.7600	Conductivity (σ):	2.01	1.95	3.11	5
	Body 2410	e'	50.8100	Relative Permittivity (ϵ_r):	50.81	52.76	-3.69	5
		e"	14.7300	Conductivity (σ):	1.97	1.91	3.48	5
	Body 2475	e'	50.5500	Relative Permittivity (ϵ_r):	50.55	52.67	-4.02	5
		e"	14.9700	Conductivity (σ):	2.06	1.99	3.78	5
6/29/2015	Body 2450	e'	51.5100	Relative Permittivity (ϵ_r):	51.51	52.70	-2.26	5
		e"	14.8700	Conductivity (σ):	2.03	1.95	3.88	5
	Body 2410	e'	51.7800	Relative Permittivity (ϵ_r):	51.78	52.76	-1.86	5
		e"	14.7300	Conductivity (σ):	1.97	1.91	3.48	5
	Body 2475	e'	51.4600	Relative Permittivity (ϵ_r):	51.46	52.67	-2.29	5
		e"	15.0200	Conductivity (σ):	2.07	1.99	4.12	5
7/3/2015	Body 5180	e'	47.5000	Relative Permittivity (ϵ_r):	47.50	49.05	-3.15	5
		e"	18.4200	Conductivity (σ):	5.31	5.27	0.65	5
	Body 5200	e'	47.6600	Relative Permittivity (ϵ_r):	47.66	49.02	-2.77	5
		e"	18.7300	Conductivity (σ):	5.42	5.29	2.28	5
	Body 5600	e'	46.9200	Relative Permittivity (ϵ_r):	46.92	48.48	-3.21	5
		e"	18.9600	Conductivity (σ):	5.90	5.76	2.48	5
	Body 5800	e'	46.9000	Relative Permittivity (ϵ_r):	46.90	48.20	-2.70	5
		e"	19.2400	Conductivity (σ):	6.20	6.00	3.41	5
	Body 5825	e'	46.6600	Relative Permittivity (ϵ_r):	46.66	48.20	-3.20	5
		e"	19.1900	Conductivity (σ):	6.22	6.00	3.59	5

8.2. System Check

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The same SAR probe(s) and tissue-equivalent media combinations used with each specific SAR system for system verification must be used for device testing. When multiple probe calibration points are required to cover substantially large transmission bands, independent system verifications are required for each probe calibration point. A system verification must be performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium. Additional system verification should be considered according to the conditions of the tissue-equivalent medium and measured tissue dielectric parameters, typically every three to four days when the liquid parameters are re-measured or sooner when marginal liquid parameters are used at the beginning of a series of measurements.

System Performance Check Measurement Conditions:

- The measurements were performed in the flat section of the TWIN SAM or ELI phantom, shell thickness: 2.0 $\pm$ 0.2 mm (bottom plate) filled with Body or Head simulating liquid of the following parameters.
- The depth of tissue-equivalent liquid in a phantom must be $\geq$ 15.0 cm for SAR measurements $\leq$ 3 GHz and $\geq$ 10.0 cm for measurements $>$ 3 GHz.
- The DASY system with an E-Field Probe was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10 mm (above 1 GHz) and 15 mm (below 1 GHz) from dipole center to the simulating liquid surface.
- The coarse grid with a grid spacing of 15 mm was aligned with the dipole.
For 5 GHz band - The coarse grid with a grid spacing of 10 mm was aligned with the dipole.
- Special 7x7x7 (below 3 GHz) and/or 8x8x7 (above 3 GHz) fine cube was chosen for the cube.
- Distance between probe sensors and phantom surface was set to 3 mm.
For 5 GHz band - Distance between probe sensors and phantom surface was set to 2.5 mm
- The dipole input power (forward power) was 100 mW.
- The results are normalized to 1 W input power.

Reference Target SAR Values

The reference SAR values can be obtained from the calibration certificate of system validation dipoles

System Dipole	Serial No.	Cal. Date	Freq. (MHz)	Target SAR Values (W/kg)		
				1g/10g	Head	Body
D2450V2	899	3/13/2015	2450	1g	51.6	48.8
				10g	23.9	22.7
D2450V2	706	5/11/2015	2450	1g	52.6	51.3
				10g	24.6	24.0
D5GHzV2	1168	12/4/2014	5200	1g	79.3	76.0
				10g	22.5	21.1
			5600	1g	81.7	82.0
				10g	23.2	22.7
			5800	1g	78.0	76.2
				10g	22.1	21.0

System Check Results

The 1-g and 10-g SAR measured with a reference dipole, using the required tissue-equivalent medium at the test frequency, must be within 10% of the manufacturer calibrated dipole SAR target.

SAR Lab 1

Date Tested	System Dipole		T.S. Liquid		Measured Results		Target (Ref. Value)	Delta ±10 %	Plot No.
	Type	Serial #			Zoom Scan to 100 mW	Normalize to 1 W			
5/11/2015	D5GHzV2 (5.2GHz)	1168	Head	1g	7.55	75.5	79.30	-4.79	
				10g	2.16	21.6	22.50	-4.00	
5/11/2015	D5GHzV2 (5.6GHz)	1168	Head	1g	8.18	81.8	81.70	0.12	
				10g	2.30	23.0	23.20	-0.86	
5/13/2015	D5GHzV2 (5.8GHz)	1168	Head	1g	7.76	77.6	78.00	-0.51	
				10g	2.19	21.9	22.10	-0.90	
5/18/2015	D5GHzV2 (5.2GHz)	1168	Body	1g	7.44	74.4	76.00	-2.11	
				10g	2.11	21.1	21.10	0.00	
5/18/2015	D5GHzV2 (5.6GHz)	1168	Body	1g	8.22	82.2	82.00	0.24	
				10g	2.29	22.9	22.70	0.88	
5/18/2015	D5GHzV2 (5.8GHz)	1168	Body	1g	7.12	71.2	76.20	-6.56	1,2
				10g	2.00	20.0	21.00	-4.76	

SAR Lab 4

Date Tested	System Dipole		T.S. Liquid		Measured Results		Target (Ref. Value)	Delta ±10 %	Plot No.
	Type	Serial #			Zoom Scan to 100 mW	Normalize to 1 W			
5/12/2015	D2450V2	899	Head	1g	5.23	52.3	51.6	1.36	3,4
				10g	2.40	24.0	23.9	0.42	
5/12/2015	D2450V2	899	Body	1g	4.94	49.4	48.8	1.23	
				10g	2.28	22.8	22.7	0.44	
6/29/2015	D2450V2	706	Body	1g	5.51	55.10	51.3	7.41	5,6
				10g	2.54	25.40	24.0	5.83	
7/3/2015	D5GHzV2 (5200)	1168	Body	1g	7.21	72.10	76.0	-5.13	7,8
				10g	2.03	20.30	21.1	-3.79	
7/3/2015	D5GHzV2 (5600)		Body	1g	8.45	84.50	82.0	3.05	
				10g	2.36	23.60	22.7	3.96	
7/3/2015	D5GHzV2 (5800)		Body	1g	7.95	79.50	76.2	4.33	
				10g	2.21	22.10	21.0	5.24	

9. Conducted Output Power Measurements

9.1. Wi-Fi 2.4GHz (DTS Band)

Measured Results

Band (GHz)	Mode	Data Rate	Ch #	Freq. (MHz)	Avg Pwr (dBm)	Max Output Power (dBm)	SAR Test (Yes/No)	Note(s)
2.4	802.11b	1 Mbps	1	2412	15.5	15.5	Yes	
			6	2437	15.5			
			11	2462	15.0			
	802.11g	6 Mbps	1	2412	Not Required	12.0	No	1
			6	2437				
			11	2462				
	802.11n (HT20)	6.5 Mbps	1	2412		10.0	No	1
			6	2437				
			11	2462				

Note(s):

- Output Power and SAR is not required for 802.11g/n HT20 channels when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

9.2. Wi-Fi 5GHz (U-NII Bands)

Measured Results

Band (GHz)	Mode	Data Rate	Ch #	Freq. (MHz)	Avg Pwr (dBm)	Max Output Power (dBm)	SAR Test (Yes/No)	Note(s)
5.3 (U-NII 2A)	802.11a	6 Mbps	52	5260	Not Required	14.5	No	1
			56	5280				
			60	5300				
			64	5320				
	802.11n (HT20)	6.5 Mbps	52	5260	Not Required	14.5	No	1
			56	5280				
			60	5300				
			64	5320				
	802.11n (HT40)	13.5 Mbps	54	5270	Not Required	14.5	No	1
			62	5310				
	802.11ac (VHT20)	6.5 Mbps	52	5260	Not Required	14.5	No	1
			56	5280				
			60	5300				
			64	5320				
	802.11ac (VHT40)	13.5 Mbps	54	5270	Not Required	14.5	No	1
			62	5310				
	802.11ac (VHT80)	29.3 Mbps	58	5290	14.5	14.5	Yes	
5.5 (U-NII 2C)	802.11a	6 Mbps	100	5500	Not Required	14.5	No	1
			116	5580				
			124	5620				
			140	5700				
	802.11n (HT20)	6.5 Mbps	100	5500	Not Required	14.5	No	1
			116	5580				
			124	5620				
			140	5700				
	802.11n (HT40)	13.5 Mbps	102	5510	Not Required	14.5	No	1
			118	5590				
			134	5670				
	802.11ac (VHT20)	6.5 Mbps	100	5500	Not Required	14.5	No	1
			116	5580				
			124	5620				
			140	5700				
	802.11ac (VHT40)	13.5 Mbps	102	5510	Not Required	14.5	No	1
			118	5590				
			134	5670				
	802.11ac (VHT80)	29.3 Mbps	106	5530	14.5	14.5	Yes	
			122	5610	14.5			

Band (GHz)	Mode	Data Rate	Ch #	Freq. (MHz)	Avg Pwr (dBm)	Max Output Power (dBm)	SAR Test (Yes/No)	Note(s)
5.8 (U-NII 3)	802.11a	6 Mbps	149	5745	Not Required	12.0	No	1
			157	5785				
			165	5825				
	802.11n (HT20)	6.5 Mbps	149	5745	Not Required	12.0	No	1
			157	5785				
			165	5825				
	802.11n (HT40)	13.5 Mbps	151	5755	Not Required	12.0	No	1
			159	5795				
	802.11ac (VHT20)	6.5 Mbps	149	5745	Not Required	12.0	No	1
			157	5785				
			165	5825				
	802.11ac (VHT40)	13.5 Mbps	151	5755	Not Required	12.0	No	1
			159	5795				
	802.11ac (VHT80)	29.3 Mbps	155	5755	12.0	12.0	Yes	

Note(s):

- Output Power and SAR measurement is not required for 802.11a, 802.11n HT20/HT40 and 802.11ac VHT20/VHT40 channels when the specified tune-up tolerances for 802.11a, 802.11n HT20/HT40 and 802.11ac VHT20/VHT40 are lower than 802.11ac VHT80 by more than ½ dB and the measured SAR is ≤ 1.2 W/Kg.
- When the same transmission mode configurations have the same maximum output power on the same channel for the 802.11 a/g/n/ac modes, the channel in the lower order/sequence 802.11 mode (i.e. a, g, n then ac) is selected.
- When the specified maximum output power is the same for both UNII band I and UNII band 2A, begin SAR measurement in UNII band 2A; and if the highest reported SAR for UNII band 2A is
 - ≤ 1.2 W/kg, SAR is not required for UNII band I
 - > 1.2 W/kg, both bands should be tested independently for SAR.

9.3. Bluetooth

Maximum tune-up tolerance limit is 8.00 dBm from the rated nominal maximum output power. This power level qualifies for exclusion of SAR testing.

10. Measured and Reported (Scaled) SAR Results

SAR Test Reduction criteria are as follows:

KDB 447498 D01 General RF Exposure Guidance:

Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:

- ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
- ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
- ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

KDB 648474 D04 Handset SAR:

SAR is required for all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge in direct contact with a flat phantom, for 10-g extremity SAR to address interactive hand use exposure conditions, for when 1-g SAR was measured at a test separation distance greater than 5 mm.

Additional 1-g SAR testing at 5 mm is not required. For hotspot mode, 10-g extremity SAR is not required for the surfaces and edges since all 1-g reported SAR < 1.2 W/kg.

KDB 248227 D01 SAR meas for 802.11 v02:

SAR test reduction for 802.11 Wi-Fi transmission mode configurations are considered separately for DSSS and OFDM. An initial test position is determined to reduce the number of tests required for certain exposure configurations with multiple test positions. An initial test configuration is determined for each frequency band and aggregated band according to maximum output power, channel bandwidth, wireless mode configurations and other operating parameters to streamline the measurement requirements. For 2.4 GHz DSSS, either the initial test position or DSSS procedure is applied to reduce the number of SAR tests; these are mutually exclusive. For OFDM, an initial test position is only applicable to next to the ear, UMPC mini-tablet and hotspot mode configurations, which is tested using the initial test configuration to facilitate test reduction. For other exposure conditions with a fixed test position, SAR test reduction is determined using only the initial test configuration.

The multiple test positions require SAR measurements in head, hotspot mode or UMPC mini-tablet configurations may be reduced according to the highest reported SAR determined using the initial test position(s) by applying the DSSS or OFDM SAR measurement procedures in the required wireless mode test configuration(s). The initial test position(s) is measured using the highest measured maximum output power channel in the required wireless mode test configuration(s). When the reported SAR for the initial test position is:

- ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and wireless mode combination within the frequency band or aggregated band. DSSS and OFDM configurations are considered separately according to the required SAR procedures.
- > 0.4 W/kg, SAR is repeated using the same wireless mode test configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position, on the highest maximum output power channel, until the reported SAR is ≤ 0.8 W/kg or all required test positions are tested.
 - For subsequent test positions with equivalent test separation distance or when exposure is dominated by coupling conditions, the position for maximum coupling condition should be tested.
 - When it is unclear, all equivalent conditions must be tested.
- For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is > 0.8 W/kg, measure the SAR for these positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required test channels are considered.
 - The additional power measurements required for this step should be limited to those necessary for identifying subsequent highest output power channels to apply the test reduction.
- When the specified maximum output power is the same for both UNII 1 and UNII 2A, begin SAR measurements in UNII 2A with the channel with the highest measured output power. If the reported SAR for UNII 2A is ≤ 1.2 W/kg, SAR is not required for UNII 1; otherwise treat the remaining bands separately and test them independently for SAR.
- When the specified maximum output power is different between UNII 1 and UNII 2A, begin SAR with the band that has the higher specified maximum output. If the highest reported SAR for the band with the highest specified power is ≤ 1.2 W/kg, testing for the band with the lower specified output power is not required; otherwise test the remaining bands independently for SAR.

To determine the initial test position, Area Scans were performed to determine the position with the *Maximum Value of SAR (measured)*. The position that produced the highest *Maximum Value of SAR* is considered the worst case position; thus used as the initial test position.

10.1. Wi-Fi (DTS Band)

Frequency Band	Mode	RF Exposure Conditions	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Notes	Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled		
2.4GHz	802.11b 1 Mbps	Head	0	Left Touch	6	2437.0	0.268	15.5	15.5						
				Left Tilt	6	2437.0	0.253	15.5	15.5						
				Right Touch	6	2437.0	0.531	15.5	15.5	0.454	0.454			2	1
				Right Tilt	6	2437.0	0.300	15.5	15.5	0.269	0.269				
		Body-worn	15	Rear	6	2437.0	0.106	15.5	15.5	0.089	0.089			1	2
				Front	6	2437.0	0.105	15.5	15.5						
		Extremity	0	Rear	6	2437.0	N/A	15.5	15.5			0.180	0.180		
				Edge 1	6	2437.0		15.5	15.5			0.321	0.321		3
				Edge 4	6	2437.0		15.5	15.5			0.030	0.030		

Note(s):

- Highest reported SAR is ≤ 0.4 W/kg. Therefore, further SAR measurements within this exposure condition are not required.
- Highest reported SAR is > 0.4 W/kg. Due to the highest reported SAR for this test position, other test positions in Head exposure condition were evaluated until a SAR ≤ 0.8 W/kg was reported.
- Testing for a second channel was required because the reported SAR for this test position was > 0.8 W/kg.
- Additional testing required in order satisfying FCC simultaneous transmission limit criteria.

10.2. Wi-Fi (U-NII Band)

Frequency Band	Mode	RF Exposure Conditions	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Notes	Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled		
5.3 GHz U-NII 2A	802.11a 6 Mbps	Head	0	Left Touch	58	5290.0	0.112	14.5	14.5						
				Left Tilt	58	5290.0	0.077	14.5	14.5						
				Right Touch	58	5290.0	0.297	14.5	14.5	0.152	0.152			1	4
				Right Tilt	58	5290.0	0.127	14.5	14.5						
		Body-worn	15	Rear	58	5290.0	0.460	14.5	14.5	0.251	0.251			1	5
				Front	58	5290.0	0.102	14.5	14.5						
		Extremity	0	Rear	58	5290.0	0.112	14.5	14.5			0.509	0.509		
				Edge 1	58	5290.0	0.077	14.5	14.5			0.025	0.025		
				Edge 4	58	5290.0	0.297	14.5	14.5			0.319	0.319		6
5.5 GHz U-NII 2C	802.11a 6 Mbps	Head	0	Left Touch	106	5530.0	0.203	14.5	14.5						
				Left Tilt	106	5530.0	0.167	14.5	14.5						
				Right Touch	106	5530.0	0.347	14.5	14.5	0.197	0.197			1	7
				Right Tilt	106	5530.0	0.173	14.5	14.5						
		Body-worn	15	Rear	106	5530.0	0.256	14.5	14.5	0.144	0.144			1	8
				Front	106	5530.0	0.113	14.5	14.5						
		Extremity	0	Rear	106	5530.0	0.203	14.5	14.5			0.341	0.341		9
				Edge 1	106	5530.0	0.167	14.5	14.5			0.031	0.031		
				Edge 4	106	5530.0	0.347	14.5	14.5			0.308	0.308		
5.8 GHz U-NII 3	802.11a 6 Mbps	Head	0	Left Touch	155	5775.0	0.316	12.0	12.0						
				Left Tilt	155	5775.0	0.286	12.0	12.0						
				Right Touch	155	5775.0	0.460	12.0	12.0	0.243	0.243			1	10
				Right Tilt	155	5775.0	0.311	12.0	12.0						
		Body-worn	15	Rear	155	5775.0	0.293	12.0	12.0	0.147	0.147			1	11
				Front	155	5775.0	0.158	12.0	12.0						
		Extremity	0	Rear	155	5775.0	0.316	12.0	12.0			0.342	0.342		
				Edge 1	155	5775.0	0.286	12.0	12.0			0.027	0.027		
				Edge 4	155	5775.0	0.460	12.0	12.0			0.361	0.361		12

Note(s):

- Highest reported SAR is ≤ 0.4 W/kg. Therefore, further SAR measurements within this exposure condition are not required.
- Highest reported SAR is > 0.4 W/kg. Due to the highest reported SAR for this test position, other test positions in Head exposure condition were evaluated until a SAR ≤ 0.8 W/kg was reported.
- Testing for a second channel was required because the reported SAR for this test position was > 0.8 W/kg.
- Additional testing required in order satisfying FCC simultaneous transmission limit criteria.

10.3. Bluetooth

Standalone SAR Test Exclusion Considerations & Estimated SAR

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$, for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

- $f_{(\text{GHz})}$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

When the standalone SAR test exclusion is applied to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

- $(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f_{(\text{GHz})}/x}]$ W/kg for test separation distances ≤ 50 mm;
where $x = 7.5$ for 1-g SAR, and $x = 18.75$ for 10-g SAR.
- 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is > 50 mm.

Body-worn Accessory Exposure Conditions

Max. tune-up tolerance limit		Min. test separation distance (mm)	Frequency (GHz)	SAR test exclusion Result*	Test Configuration	Estimated 1-g SAR (W/kg)
(dBm)	(mW)					
8.0	6	15	2.480	0.6	Rear/Front	0.084

Conclusion:

*: The computed value is < 3 ; therefore, Bluetooth qualifies for Standalone SAR test exclusion.

Extremity Exposure Conditions

Max. tune-up tolerance limit		Min. test separation distance (mm)	Frequency (GHz)	SAR test exclusion Result*	Test Configuration	Estimated 10-g SAR (W/kg)
(dBm)	(mW)					
8.0	6	5	2.480	1.9	Rear/Edge	0.101

Conclusion:

*: The computed value is < 7.5 ; therefore, Bluetooth qualifies for Standalone SAR test exclusion.

11. SAR Measurement Variability

In accordance with published RF Exposure KDB 865664 D01 SAR measurement 100 MHz to 6 GHz. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 1.6 or 2 W/kg (1-g or 10-g respectively); steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 1.6 or 2 W/kg (1-g or 10-g respectively), repeat that measurement once.
- 3) Perform a second repeated measurement only if the **ratio of largest to smallest SAR** for the original and first repeated measurements is > 1.20 or 3 (1-g or 10-g respectively) or when the original or repeated measurement is ≥ 1.45 or 3.6 W/kg ($\sim 10\%$ from the 1-g or 10-g respective SAR limit).
- 4) Perform a third repeated measurement only if the original, first, or second repeated measurement is ≥ 1.5 or 3.75 W/kg (1-g or 10-g respectively) and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 or 3 (1-g or 10-g respectively).

Standard SAR

Frequency Band (MHz)	Air Interface	RF Exposure Conditions	Test Position	Repeated SAR (Yes/No)	Highest Measured SAR (W/kg)	Repeated Measured SAR (W/kg)	Largest to Smallest SAR Ratio
2400	Wi-Fi 802.11b/g/n	Head	Right Touch	No	0.454	N/A	N/A
5300	Wi-Fi 802.11a/n/ac	Body	Rear	No	0.251	N/A	N/A
5500	Wi-Fi 802.11a/n/ac	Head	Right Touch	No	0.197	N/A	N/A
5800	Wi-Fi 802.11a/n/ac	Head	Right Touch	No	0.243	N/A	N/A

Note(s):

Second Repeated Measurement is not required since the ratio of the largest to smallest SAR for the original and first repeated measurement is not > 1.20 .

Extremity SAR

Frequency Band (MHz)	Air Interface	RF Exposure Conditions	Test Position	Repeated SAR (Yes/No)	Highest Measured SAR (W/kg)	Repeated Measured SAR (W/kg)	Largest to Smallest SAR Ratio
2400	Wi-Fi 802.11b/g/n	Extremity (Hand/Wrist/Ankle)	Edge 1	No	0.321	N/A	N/A
5300	Wi-Fi 802.11a/n/ac	Extremity (Hand/Wrist/Ankle)	Rear	No	0.509	N/A	N/A
5500	Wi-Fi 802.11a/n/ac	Extremity (Hand/Wrist/Ankle)	Rear	No	0.341	N/A	N/A
5800	Wi-Fi 802.11a/n/ac	Extremity (Hand/Wrist/Ankle)	Edge 4	No	0.361	N/A	N/A

12. Simultaneous Transmission SAR Analysis

DTS and U-NII Radio cannot transmit simultaneously with Bluetooth Radio.

Appendixes

Refer to separated files for the following appendixes.

A_15U20259v1 SAR Photos & Ant. Locations

B_15U20259v1 SAR System Check Plots

C_15U20259v1 SAR Highest Test Plots

D_15U20259v0 SAR Tissue Ingredients

E_15U20259v0 SAR Probe Cal. Certificates

F_15U20259v1 SAR Dipole Cal. Certificates

END OF REPORT