

FCC Test Report (BT-LE)

Report No.: RF170908C01A-3

FCC ID: HD5-CT60L0N

Test Model: CT60L0N

Received Date: Oct. 30, 2017

Test Date: Nov. 01 to 06, 2017

Issued Date: Nov. 15, 2017

Applicant: Honeywell International Inc.

Address: 9680 Old Bailes Road, Fort Mill, SC 29707 USA

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory

Lab Address: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan R.O.C.

Test Location : E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan R.O.C.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Release Control Record	3
1 Certificate of Conformity.....	4
2 Summary of Test Results	5
2.1 Measurement Uncertainty	5
2.2 Modification Record	5
3 General Information.....	6
3.1 General Description of EUT (BT-LE)	6
3.2 Description of Test Modes	9
3.2.1 Test Mode Applicability and Tested Channel Detail	10
3.3 Duty Cycle of Test Signal	12
3.4 Description of Support Units	13
3.4.1 Configuration of System under Test	13
3.5 General Description of Applied Standards	14
4 Test Types and Results	15
4.1 Radiated Emission and Bandedge Measurement.....	15
4.1.1 Limits of Radiated Emission and Bandedge Measurement	15
4.1.2 Test Instruments	16
4.1.3 Test Procedures.....	17
4.1.4 Deviation from Test Standard	17
4.1.5 Test Setup.....	18
4.1.6 EUT Operating Conditions.....	19
4.1.7 Test Results	20
4.2 Conducted Output Power Measurement.....	25
4.2.1 Limits OF Conducted Output Power Measurement	25
4.2.2 Test Setup.....	25
4.2.3 Test Instruments	25
4.2.4 Test Procedures.....	25
4.2.5 Deviation from Test Standard	25
4.2.6 EUT Operating Conditions.....	25
4.2.7 Test Results	26
5 Pictures of Test Arrangements.....	27
Appendix – Information on the Testing Laboratories	28

Release Control Record

Issue No.	Description	Date Issued
RF170908C01A-3	Original release.	Nov. 15, 2017

1 Certificate of Conformity

Product: Dolphin CT60

Brand: Honeywell

Test Model: CT60L0N

Sample Status: ENGINEERING SAMPLE

Applicant: Honeywell International Inc.

Test Date: Nov. 01 to 06, 2017

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)
ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by :




Date:

Nov. 15, 2017

Claire Kuan / Specialist

Approved by :

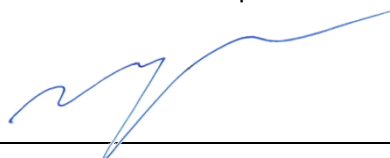

Date:

Nov. 15, 2017

May Chen / Manager

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (SECTION 15.247)			
FCC Clause	Test Item	Result	Remarks
15.205 & 209 & 15.247(d)	Radiated Emissions & Band Edge Measurement	PASS	Meet the requirement of limit. Minimum passing margin is -10.4dB at 2483.50MHz & 2390.00MHz.
15.247(b)	Conducted power	PASS	Meet the requirement of limit.

Note: This report is supplementary report.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) ($\pm$)
Radiated Emissions up to 1 GHz	30MHz ~ 1GHz	5.30 dB
	1GHz ~ 6GHz	5.16 dB
Radiated Emissions above 1 GHz	6GHz ~ 18GHz	4.91 dB
	18GHz ~ 40GHz	5.30 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT (BT-LE)

Product	Dolphin CT60
Brand	Honeywell
Test Model	CT60L0N
Status of EUT	ENGINEERING SAMPLE
HW Version	V1.0
SW Version	249D
HW P/N	DVT2.2
Power Supply Rating	3.6Vdc from battery 5Vdc from USB interface
Modulation Type	GFSK
Modulation Technology	DTS
Transfer Rate	Up to 2Mbps
Operating Frequency	2402MHz ~ 2480MHz
Number of Channel	40
Output Power	LE 1M: 1.355mW LE 2M (BT 5.0): 1.199mW
Antenna Type	Refer to Note
Antenna Connector	Refer to Note
Accessory Device	Battery x 1
Data Cable Supplied	USB snap-on adapter x 1 (1.25m, Shielded with two cores)

Note:

1. This report is prepared for FCC Class II change. The difference compared with the Report No.: RF170908C01-3 design is as the following:

◆ The change list as below table:

No.	Change Item	BOM Change	Layout Change
1	1.U2101 SIM_SWIO_1 connect to SIM1 J1301 2.U2101 SIM_SWIO_2 connect to SIM1 J1303 3. SIM powers path change	Yes	Yes
2	Add a pull-up 100K resistor to VREG_L11A_1P8 at J1202 pin-34 and connect J1202 pin-35 to GPIO_56	Yes	Yes
3	1. Pull-down WIPWR_CHG_OK. 2. There is divided voltage 1.8V from VDC_IN by 180K and 100K resistors to QI_PMA_ON	Yes	Yes
4	Add more vias to mic pads to make the pads hold.	No	Yes
5	They need to be shifted base on MD's drawing.	No	Yes
6	Add more vias to the solder pads to make them hold better. (SW1401~SW1406)	No	Yes
7	Circuit change between J2003 and U2001	Yes	Yes
8	Remove U1901 circuit, just keep J1901,L1906(DNI),R1910(OR), E1911(DNI),EMI1901 from original for RF.	Yes	Yes
9	1.Remove U1801 circuit,just keep EMI1801,EMI1802,R1813,R1812,L1806,J1801,R1809,R1810,R1811 for RF.	Yes	Yes
10	AIN1 pin needs to be pulled down	No	Yes

No.	Change Item	BOM Change	Layout Change
11	CT50 pad size is 2.0x3.0mm but MD team suggests pad size is 1.5x3.0mm because receiver spec suggested having 0.5mm gape requirement.	No	Yes
12	Moving camera's test points x 7 pcs to left	No	Yes
13	Moving U1107 circuit to right for 0.5mm	No	Yes
14	Add additional vias on the battery connector pads	No	Yes
15	RF team needs to have NFC circuit changes and matching components value changes.	Yes	Yes
16	Open a ground pad to contact receiver's back side metal	No	Yes
17	R401 needs to be changed to 33 Ohm	Yes	No
18	Put R1219 and R1220	Yes	No
19	Change Tool1716 to PTH.	No	Yes
20	Add 0.5pF to USIM2_DATA_CONN, USIM1_DATA_CONN between system GND,instead to SIM GND	Yes	Yes
21	Add Ferried Bead and capacitor on Vibrator driving line.	Yes	Yes
22	Remove R505,C512,C513	Yes	Yes

2. According to above conditions, only radiated emissions (Above 1GHz test: only LE 1M modulation test) and maximum peak output power test item needs to be performed. And all data was verified to meet the requirements.

3. There are WLAN, Bluetooth and NFC technology used for the EUT.

4. Simultaneously transmission condition.

Condition	Technology	
1	WLAN 2.4GHz	NFC
2	WLAN 5GHz	NFC
3	Bluetooth	NFC

Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.

5. The EUT needs to be supplied from battery, the information is as below table:

Brand	Model No.	Spec.
Inventus	CT50-BTSC	3.6Vdc, 4040mAh, 14.6Wh

6. The antennas provided to the EUT, please refer to the following table:

Note: The antennas provided to the LG+, please refer to the following table:

WLAN / Bluetooth Antenna Spec.				
Antenna No.	Antenna Gain include path loss (dBi)	Frequency rang (GHz)	Antenna type	Connector type
1	0.62	2.4~2.4835	PIFA	UFL
	1.14	5.15~5.25		
	1.14	5.25~5.35		
	1.14	5.47~5.725		
	1.14	5.725~5.85		
NFC Antenna Spec.				
Antenna No.	Frequency rang (MHz)		Antenna type	Connector type
1	13~14		Loop	NA

Note: 1. The antenna has path loss. 2.4GHz: 1dB; 5GHz: 1.7dB

Note: 1. The antenna has path loss. 2.4GHz: 1dB; 5GHz: 1.7dB

7. In the original test report, for the radiated emissions, the EUT was pre-tested under the following modes:

Test Mode	Description
Mode A	Power from laptop
Mode B	Power from adapter

From the above modes, the worst case was found in **Mode A**. Therefore only the test data of the mode was recorded in this report.

8. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 Description of Test Modes

40 channels are provided to this EUT:

CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO			DESCRIPTION
	RE≥1G	RE<1G	APCM	
-	√	√	√	Power from Laptop

Where **RE≥1G**: Radiated Emission above 1GHz **RE<1G**: Radiated Emission below 1GHz
APCM: Antenna Port Conducted Measurement

NOTE: In the original test report, the EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **Z-plane (below 1GHz) & X-plane (Above 1GHz)**.

Radiated Emission Test (Above 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
0 to 39	0, 19, 39	GFSK	1

Radiated Emission Test (Below 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
0 to 39	0	GFSK	1
0 to 39	39	GFSK	2

Antenna Port Conducted Measurement:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
0 to 39	0, 19, 39	GFSK	1
0 to 39	0, 19, 39	GFSK	2

Test Condition:


APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER (System)	TESTED BY
RE≥1G	24deg. C, 67%RH	120Vac, 60Hz	Rey Chen
RE<1G	22deg. C, 63%RH	120Vac, 60Hz	Rey Chen
APCM	25deg. C, 60%RH	120Vac, 60Hz	Anderson Chen

3.3 Duty Cycle of Test Signal

LE 1M:

Duty cycle of test signal is < 98 %, duty factor shall be considered.


Duty cycle = $0.388 \text{ ms} / 0.624 \text{ ms} = 0.622$, Duty factor = $10 * \log(1/0.622) = 2.06$

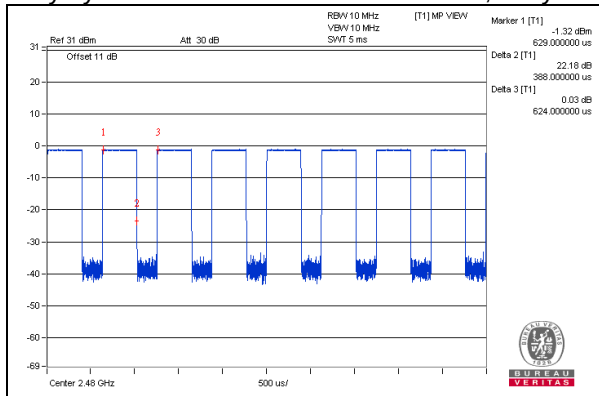

LE 2M:

Duty cycle of test signal is < 98 %, duty factor shall be considered.

Duty cycle = $0.205 \text{ ms} / 0.627 \text{ ms} = 0.327$, Duty factor = $10 * \log(1/0.327) = 4.86$

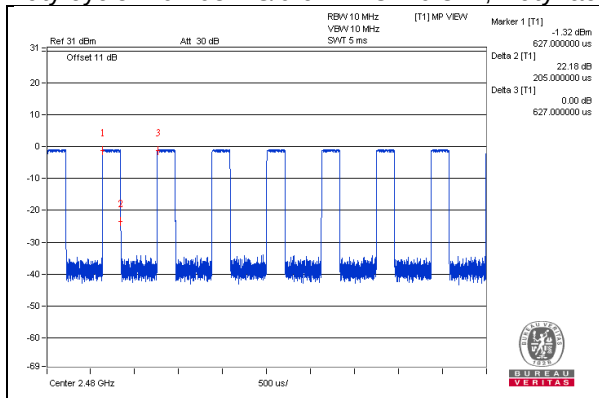

3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Laptop	HP	Pavilion 14-ab023TU	5CD5340WXZ	FCC DoC	Provided by Lab
B.	Micro SD Card	Transcend	16GB	NA	NA	Provided by Lab


Note:

1. All power cords of the above support units are non-shielded (1.8m).

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	USB Charging Cable	1	1.25	Yes	2	Supplied by client(for RF Setup)

Note: The core(s) is(are) originally attached to the cable(s).

3.4.1 Configuration of System under Test

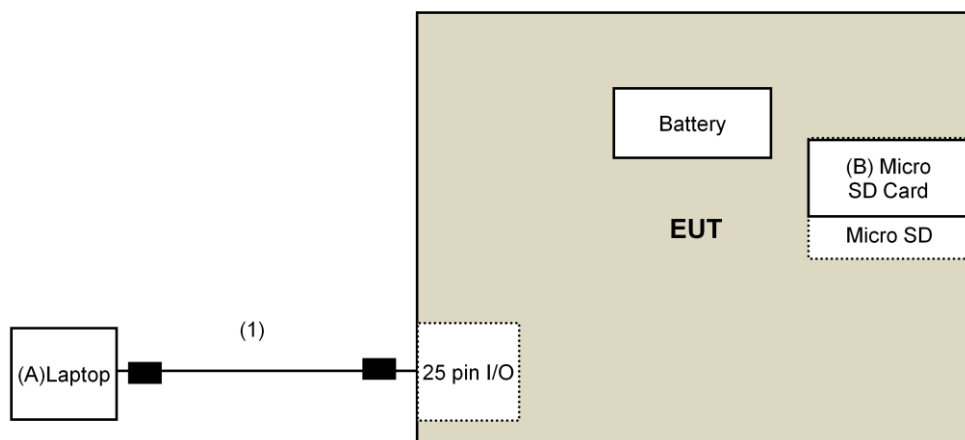

3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)
KDB 558074 D01 DTS Meas Guidance v04
ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

NOTE: The EUT has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Keysight	N9038A	MY54450088	July 08, 2017	July 07, 2018
Pre-Amplifier ^(*) EMCI	EMC001340	980142	Jan. 20, 2016	Jan. 19, 2018
Loop Antenna ^(*) Electro-Metrics	EM-6879	264	Dec. 16, 2016	Dec. 15, 2018
RF Cable	NA	LOOPCAB-001 LOOPCAB-002	Jan. 17, 2017	Jan. 16, 2018
Pre-Amplifier Mini-Circuits	ZFL-1000VH2B	AMP-ZFL-01	Nov. 10, 2016	Nov. 09, 2017
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-406	Dec. 13, 2016	Dec. 12, 2017
RF Cable	8D	966-4-1 966-4-2 966-4-3	Apr. 01, 2017	Mar. 31, 2018
Fixed attenuator Mini-Circuits	UNAT-5+	PAD-3m-4-01	Oct. 03, 2017	Oct. 02, 2018
Horn_Antenna SCHWARZBECK	BBHA 9120D	9120D-783	Dec. 27, 2016	Dec. 26, 2017
Pre-Amplifier EMCI	EMC12630SE	980385	Feb. 02, 2017	Feb. 01, 2018
RF Cable	EMC104-SM-SM-1200 EMC104-SM-SM-2000 EMC104-SM-SM-5000	160923 150318 150321	Feb. 02, 2017 Mar. 29, 2017 Mar. 29, 2017	Feb. 01, 2018 Mar. 28, 2018 Mar. 28, 2018
Pre-Amplifier EMCI	EMC184045SE	980387	Feb. 02, 2017	Feb. 01, 2018
Horn_Antenna SCHWARZBECK	BBHA 9170	BBHA9170608	Dec. 15, 2016	Dec. 14, 2017
RF Cable	SUCOFLEX 102	36432/2 36433/2	Jan. 15, 2017	Jan. 14, 2018
Software	ADT_Radiated_V8.7.08	NA	NA	NA
Antenna Tower & Turn Table Max-Full	MF-7802	MF780208410	NA	NA
Boresight Antenna Fixture	FBA-01	FBA-SIP02	NA	NA
Spectrum Analyzer Agilent	E4446A	MY48250253	Dec. 21, 2016	Dec. 20, 2017
Power meter Anritsu	ML2495A	1014008	May 11, 2017	May 10, 2018
Power sensor Anritsu	MA2411B	0917122	May 11, 2017	May 10, 2018

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. *The calibration interval of the above test instruments is 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
3. The test was performed in 966 Chamber No. 4.
4. The FCC Designation Number is TW2022.
5. The CANADA Site Registration No. is 20331-2
6. Tested Date: Nov. 01 to 06, 2017

4.1.3 Test Procedures

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Both X and Y axes of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup


For Radiated emission below 30MHz



For Radiated emission 30MHz to 1GHz

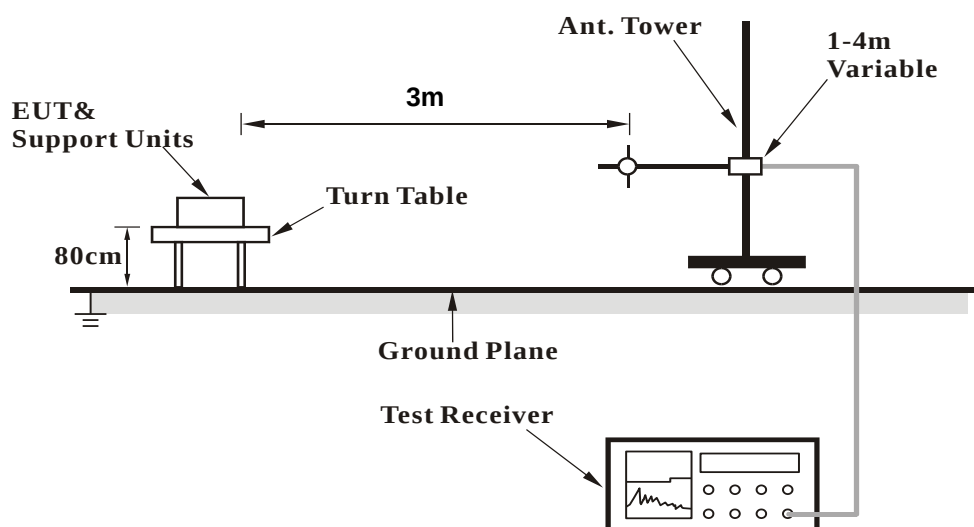

For Radiated emission above 1GHz

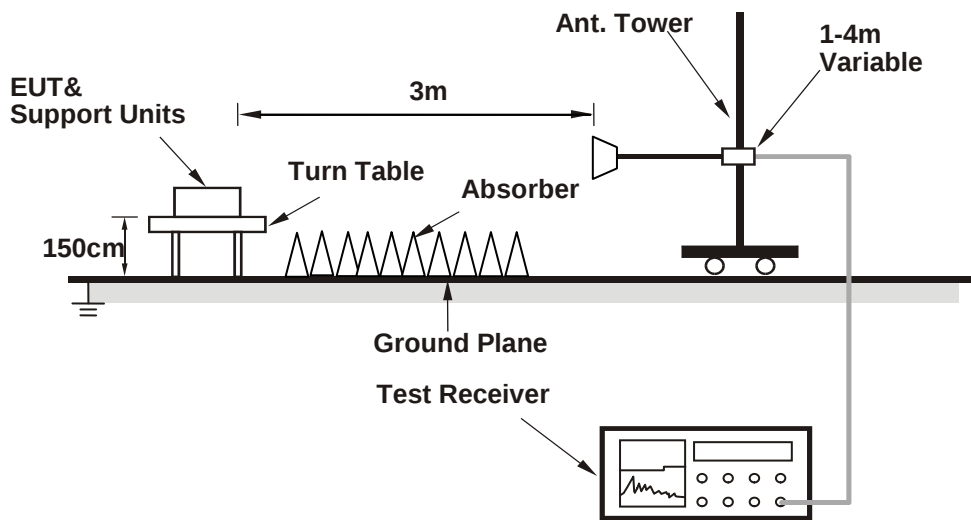

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

- a. Connected the EUT with the Laptop.
- b. Controlling software (QRCT_Version3.0.268.0) has been activated to set the EUT on specific status.

4.1.7 Test Results

LE 1M

Above 1GHz Data:

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	55.1 PK	74.0	-18.9	1.18 H	180	56.4	-1.3
2	2390.00	43.1 AV	54.0	-10.9	1.18 H	180	44.4	-1.3
3	*2402.00	97.9 PK			1.18 H	180	99.0	-1.1
4	*2402.00	96.4 AV			1.18 H	180	97.5	-1.1
5	4804.00	37.4 PK	74.0	-36.6	1.53 H	136	34.2	3.2
6	4804.00	26.4 AV	54.0	-27.6	1.53 H	136	23.2	3.2
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	54.4 PK	74.0	-19.6	1.54 V	265	55.7	-1.3
2	2390.00	43.6 AV	54.0	-10.4	1.54 V	265	44.9	-1.3
3	*2402.00	94.4 PK			1.54 V	265	95.5	-1.1
4	*2402.00	92.2 AV			1.54 V	265	93.3	-1.1
5	4804.00	38.2 PK	74.0	-35.8	1.59 V	198	35.0	3.2
6	4804.00	27.4 AV	54.0	-26.6	1.59 V	198	24.2	3.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 19	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2440.00	97.9 PK			1.12 H	177	99.1	-1.2
2	*2440.00	96.4 AV			1.12 H	177	97.6	-1.2
3	4880.00	37.6 PK	74.0	-36.4	1.53 H	122	34.2	3.4
4	4880.00	26.6 AV	54.0	-27.4	1.53 H	122	23.2	3.4
5	7320.00	46.2 PK	74.0	-27.8	1.64 H	219	36.4	9.8
6	7320.00	33.2 AV	54.0	-20.8	1.64 H	219	23.4	9.8
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2440.00	94.1 PK			1.56 V	248	95.3	-1.2
2	*2440.00	92.1 AV			1.56 V	248	93.3	-1.2
3	4880.00	39.1 PK	74.0	-34.9	1.72 V	183	35.7	3.4
4	4880.00	28.0 AV	54.0	-26.0	1.72 V	183	24.6	3.4
5	7320.00	46.0 PK	74.0	-28.0	1.46 V	196	36.2	9.8
6	7320.00	32.5 AV	54.0	-21.5	1.46 V	196	22.7	9.8

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	96.5 PK			1.52 H	118	97.5	-1.0
2	*2480.00	94.6 AV			1.52 H	118	95.6	-1.0
3	2483.50	55.5 PK	74.0	-18.5	1.52 H	118	56.5	-1.0
4	2483.50	43.6 AV	54.0	-10.4	1.52 H	118	44.6	-1.0
5	4960.00	37.8 PK	74.0	-36.2	1.54 H	133	34.2	3.6
6	4960.00	26.6 AV	54.0	-27.4	1.54 H	133	23.0	3.6
7	7440.00	45.1 PK	74.0	-28.9	1.58 H	237	35.0	10.1
8	7440.00	32.1 AV	54.0	-21.9	1.58 H	237	22.0	10.1
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	92.8 PK			1.58 V	267	93.8	-1.0
2	*2480.00	90.6 AV			1.58 V	267	91.6	-1.0
3	2483.50	54.7 PK	74.0	-19.3	1.58 V	267	55.7	-1.0
4	2483.50	43.3 AV	54.0	-10.7	1.58 V	267	44.3	-1.0
5	4960.00	38.9 PK	74.0	-35.1	1.69 V	194	35.3	3.6
6	4960.00	28.0 AV	54.0	-26.0	1.69 V	194	24.4	3.6
7	7440.00	45.8 PK	74.0	-28.2	1.49 V	197	35.7	10.1
8	7440.00	32.5 AV	54.0	-21.5	1.49 V	197	22.4	10.1

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

Below 1GHz Data:

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	59.08	18.8 QP	40.0	-21.2	1.50 H	356	27.2	-8.4
2	164.64	22.5 QP	43.5	-21.0	1.00 H	332	30.5	-8.0
3	237.99	28.1 QP	46.0	-17.9	1.00 H	299	38.1	-10.0
4	305.65	25.1 QP	46.0	-20.9	1.50 H	277	32.6	-7.5
5	352.57	25.6 QP	46.0	-20.4	2.00 H	95	32.1	-6.5
6	720.54	33.8 QP	46.0	-12.2	1.00 H	307	32.7	1.1
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	30.10	24.2 QP	40.0	-15.8	1.00 V	272	33.7	-9.5
2	78.16	23.7 QP	40.0	-16.3	1.50 V	272	36.2	-12.5
3	138.81	21.0 QP	43.5	-22.5	2.00 V	197	29.3	-8.3
4	191.04	19.7 QP	43.5	-23.8	1.00 V	251	30.7	-11.0
5	393.90	22.3 QP	46.0	-23.7	1.00 V	340	27.8	-5.5
6	718.17	30.4 QP	46.0	-15.6	1.50 V	324	29.3	1.1

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

LE 2M (BT 5.0)

Below 1GHz Data:

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	44.62	19.6 QP	40.0	-20.4	2.00 H	293	27.4	-7.8
2	156.73	22.8 QP	43.5	-20.7	1.00 H	308	30.7	-7.9
3	236.59	27.7 QP	46.0	-18.3	1.50 H	300	37.8	-10.1
4	294.88	27.3 QP	46.0	-18.7	1.50 H	186	35.1	-7.8
5	472.05	25.0 QP	46.0	-21.0	1.00 H	256	28.3	-3.3
6	722.10	34.1 QP	46.0	-11.9	2.00 H	309	33.0	1.1
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	34.63	24.4 QP	40.0	-15.6	1.50 V	360	33.3	-8.9
2	82.02	22.3 QP	40.0	-17.7	1.00 V	230	35.8	-13.5
3	213.72	19.8 QP	43.5	-23.7	1.00 V	185	31.3	-11.5
4	340.01	21.4 QP	46.0	-24.6	2.00 V	321	28.0	-6.6
5	509.28	24.6 QP	46.0	-21.4	1.50 V	319	27.1	-2.5
6	716.35	29.9 QP	46.0	-16.1	2.00 V	179	28.9	1.0

REMARKS:


1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

4.2 Conducted Output Power Measurement

4.2.1 Limits OF Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

4.2.2 Test Setup

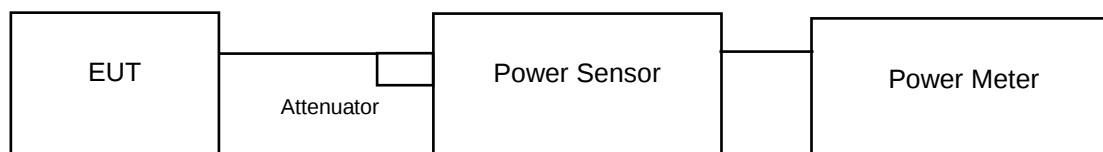

4.2.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.2.4 Test Procedures

A peak / average power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak / average power sensor. Record the power level.

4.2.5 Deviation from Test Standard

No deviation.

4.2.6 EUT Operating Conditions

Same as Item 4.3.6.

4.2.7 Test Results

LE 1M

FOR PEAK POWER

Channel	Frequency (MHz)	Peak Power (mW)	Peak Power (dBm)	Limit (dBm)	Pass/Fail
0	2402	1.355	1.32	30	Pass
19	2440	1.138	0.56	30	Pass
39	2480	1.169	0.68	30	Pass

FOR AVERAGE POWER - reference only

Channel	Frequency (MHz)	Average Power (mW)	Average Power (dBm)
0	2402	1.282	1.08
19	2440	1.076	0.32
39	2480	1.107	0.44

LE 2M (BT 5.0)

FOR PEAK POWER

Channel	Frequency (MHz)	Peak Power (mW)	Peak Power (dBm)	Limit (dBm)	Pass/Fail
0	2402	1.117	0.48	30	Pass
19	2440	1.153	0.62	30	Pass
39	2480	1.199	0.79	30	Pass

FOR AVERAGE POWER - reference only

Channel	Frequency (MHz)	Average Power (mW)	Average Power (dBm)
0	2402	1.035	0.15
19	2440	1.062	0.26
39	2480	1.099	0.41

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---