

802.11be-EHT20 Power Spectral Density - Ant 7


106+26 Tone_MR2_CH48 (5240MHz)



106+26 Tone_MR2_CH64 (5320MHz)



106+26 Tone_MR2_CH116 (5580MHz)

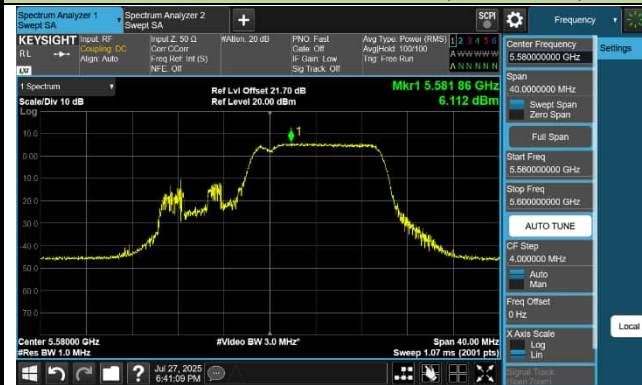

106+26 Tone_MR2_CH157 (5785MHz)



802.11be-EHT80 Power Spectral Density - Ant 7


484+242 Tone_MRU3_CH48 (5210MHz)



484+242 Tone_MRU3_CH64 (5290MHz)



484+242 Tone_MRU3_CH116 (5610MHz)

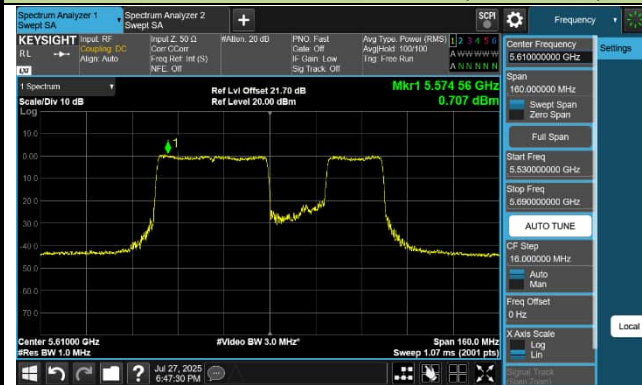


484+242 Tone_MRU3_CH157 (5775MHz)



802.11be-EHT160 Power Spectral Density - Ant 7

996+484 Tone_MRU3_CH48 (5250MHz)

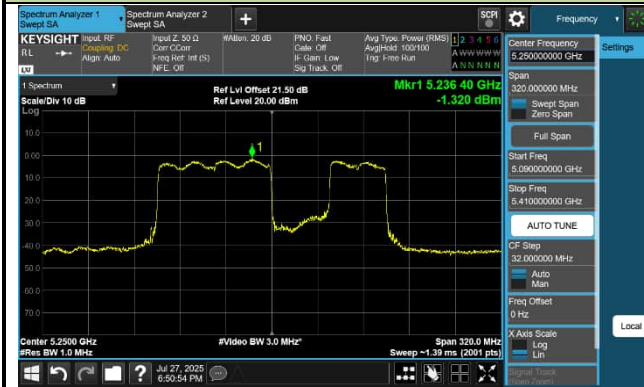

996+484 Tone_MRU3_CH64 (5570MHz)



802.11be-EHT80 Power Spectral Density - Ant 7

484+242 Tone_PUN1_CH42 (5210MHz)



484+242 Tone_PUN1_CH58 (5290MHz)



484+242 Tone_PUN1_CH122 (5610MHz)



484+242 Tone_PUN1_CH155 (5775MHz)



802.11be-EHT160 Power Spectral Density - Ant 7

996+484 Tone_PUN1_CH50 (5250MHz)




996+484 Tone_PUN1_CH114 (5570MHz)



802.11be-EHT160 Power Spectral Density - Ant 7

996+484+242 Tone_PUN2_CH50 (5250MHz)

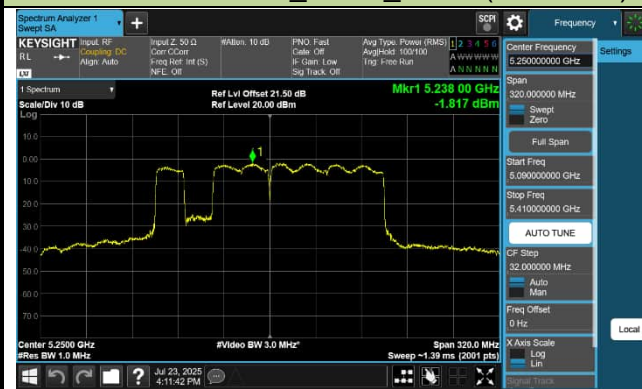

996+484+242 Tone_PUN2_CH114 (5570MHz)



7.7. Frequency Stability Measurement

7.7.1. Test Limit

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

7.7.2. Test Limit

Frequency Stability Under Temperature Variations:


The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to highest. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C decreased per stage until the lowest temperature reached.

Frequency Stability Under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.

7.7.3. Test Setup

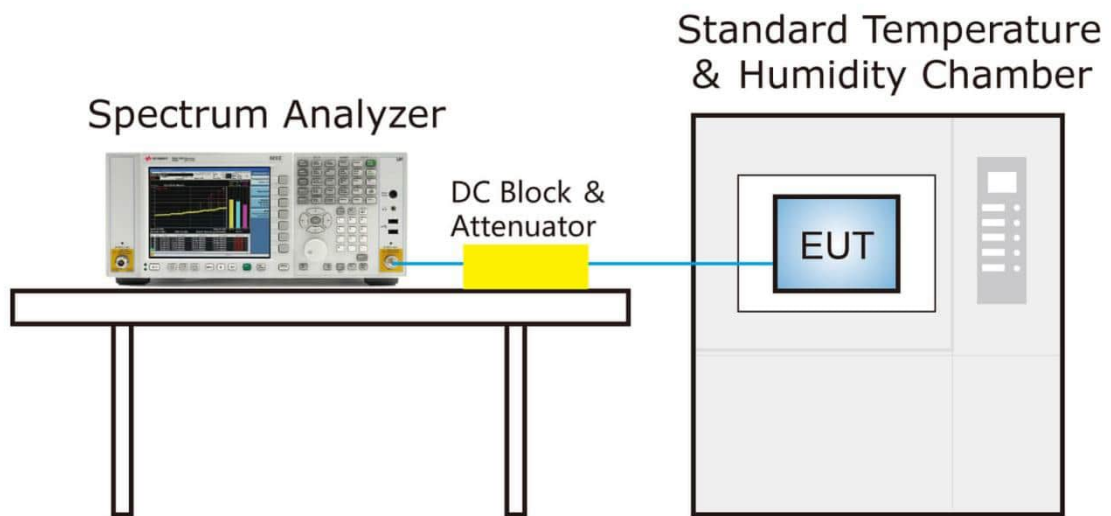

7.7.4. Test Result

Test Site	SR3	Test Engineer	Owen
Test Date	2025/7/30		
Test Mode	5180MHz (Carrier Mode)		

Voltage (%)	Power (VAC)	Temp (°C)	Frequency Tolerance (ppm)			
			0 minutes	2 minutes	5 minutes	10 minutes
100	DC 3.87V	- 30	14.25	14.17	14.15	14.13
		- 20	12.61	12.55	12.55	12.45
		- 10	12.24	12.08	12.01	11.97
		0	11.85	11.83	11.80	11.78
		+ 10	11.58	11.04	10.68	3.71
		+ 20	3.40	3.09	2.88	2.76
		+ 30	2.34	2.18	2.01	1.89
		+ 40	-6.49	-6.74	-6.81	-6.93
		+ 50	-6.99	-7.07	-7.14	-7.18
115	DC 4.45V	+ 20	-4.15	-4.15	-4.15	-4.13
85	DC 3.29V	+ 20	-4.17	-4.17	-4.15	-4.15

7.8. Radiated Spurious Emission Measurement

7.8.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.8.2. Test Procedure Used

KDB 789033 D02v02r01- Section G

7.8.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
>1000 MHz	1 MHz

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.
If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

7.8.4. Test Setup

Below 1GHz Test Setup:

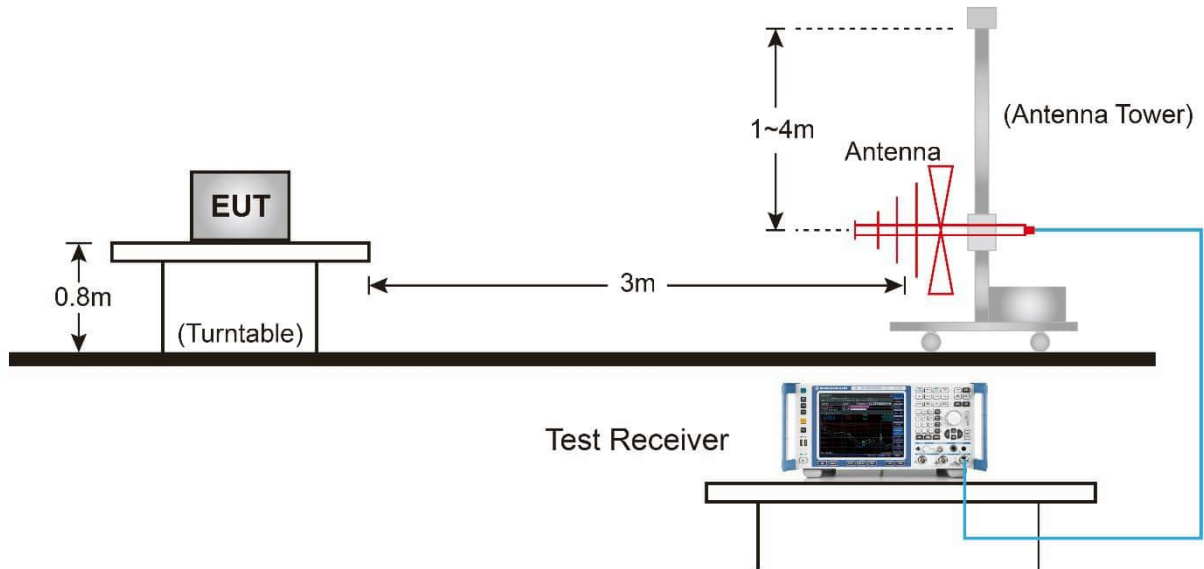


Above 1GHz Test Setup:

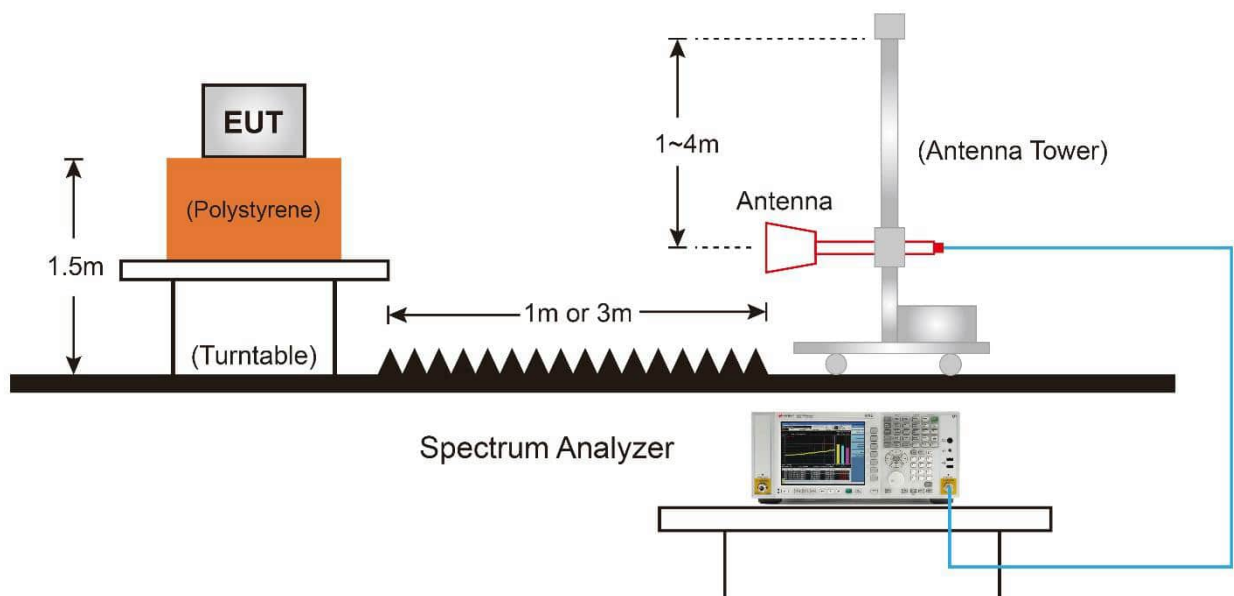

7.8.5. Test Result

EUT	Mobile Computer	Date of Test	2025-07-17
Factor	VULB 9162	Temp. / Humidity	23°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Tim
Test Mode	802.11ac-20MHz_TX_Band1_CH 40_ANT 6+7	Test Voltage	By Notebook PC

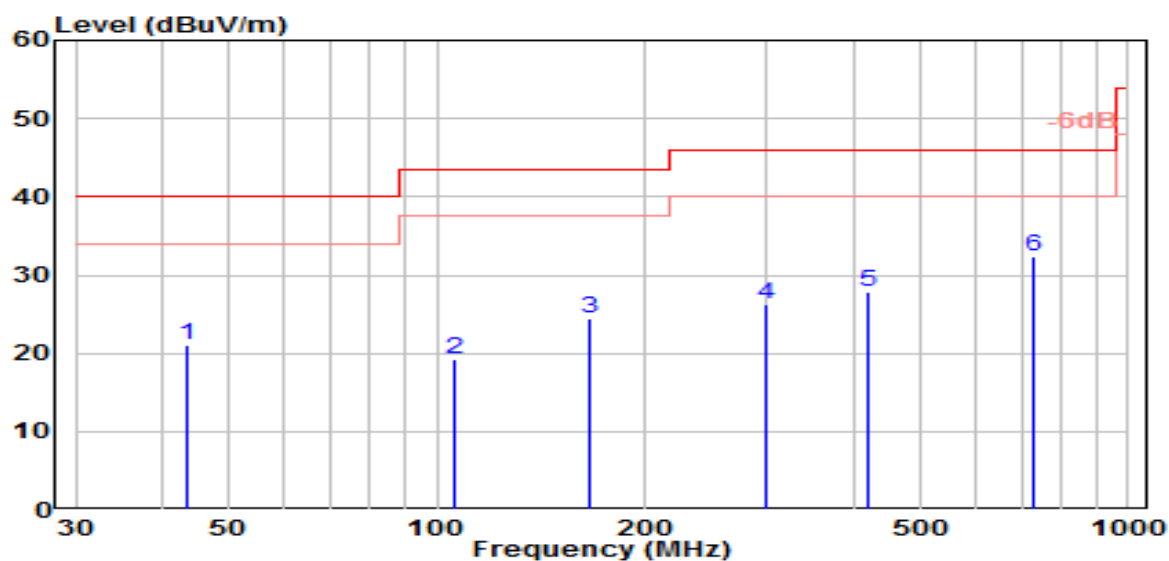


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	43.580	0.25	20.75	21.00	-19.00	40.00	100	0	QP
2	105.660	0.55	18.80	19.35	-24.15	43.50	150	65	QP
3	165.800	8.19	16.22	24.41	-19.09	43.50	150	255	QP
4	299.660	5.17	21.15	26.32	-19.68	46.00	100	255	QP
5	418.970	3.86	24.00	27.86	-18.14	46.00	150	265	QP
6	* 732.280	3.14	29.28	32.42	-13.58	46.00	150	335	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. The amplitude of radiated emissions (frequency range from 9kHz to 30MHz) is that proximity to ambient noise, which also are attenuated more than 20dB below the permissible value. Therefore, the data is not presented in the report.

EUT	Mobile Computer	Date of Test	2025-07-17
Factor	VULB 9162	Temp. / Humidity	23°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Tim
Test Mode	802.11ac-20MHz_TX_Band1_CH 40_ANT 6+7	Test Voltage	By Notebook PC

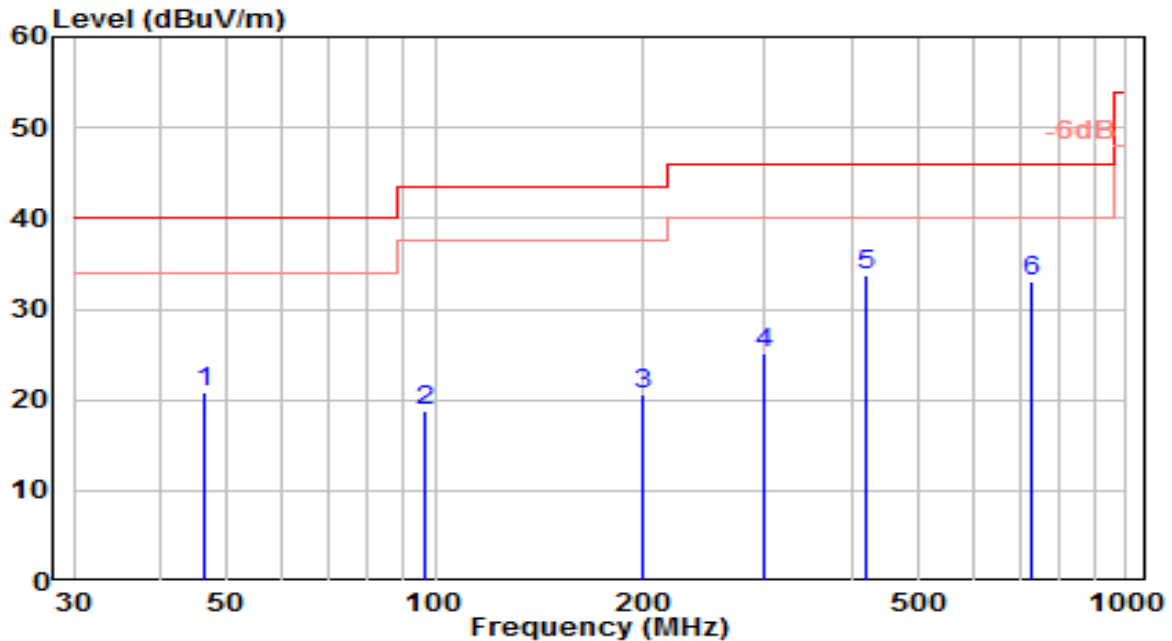


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	46.490	-0.29	21.08	20.79	-19.21	40.00	100	60	QP
2	96.930	0.52	18.36	18.87	-24.63	43.50	150	135	QP
3	199.750	2.07	18.55	20.62	-22.88	43.50	150	210	QP
4	299.660	3.90	21.15	25.05	-20.95	46.00	150	170	QP
5	* 418.970	9.85	24.00	33.84	-12.16	46.00	100	205	QP
6	731.310	3.81	29.26	33.07	-12.93	46.00	100	180	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. The amplitude of radiated emissions (frequency range from 9kHz to 30MHz) is that proximity to ambient noise, which also are attenuated more than 20dB below the permissible value. Therefore, the data is not presented in the report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11a_TX_Band1_CH 36_ANT 6+7	Test Voltage	By Notebook PC

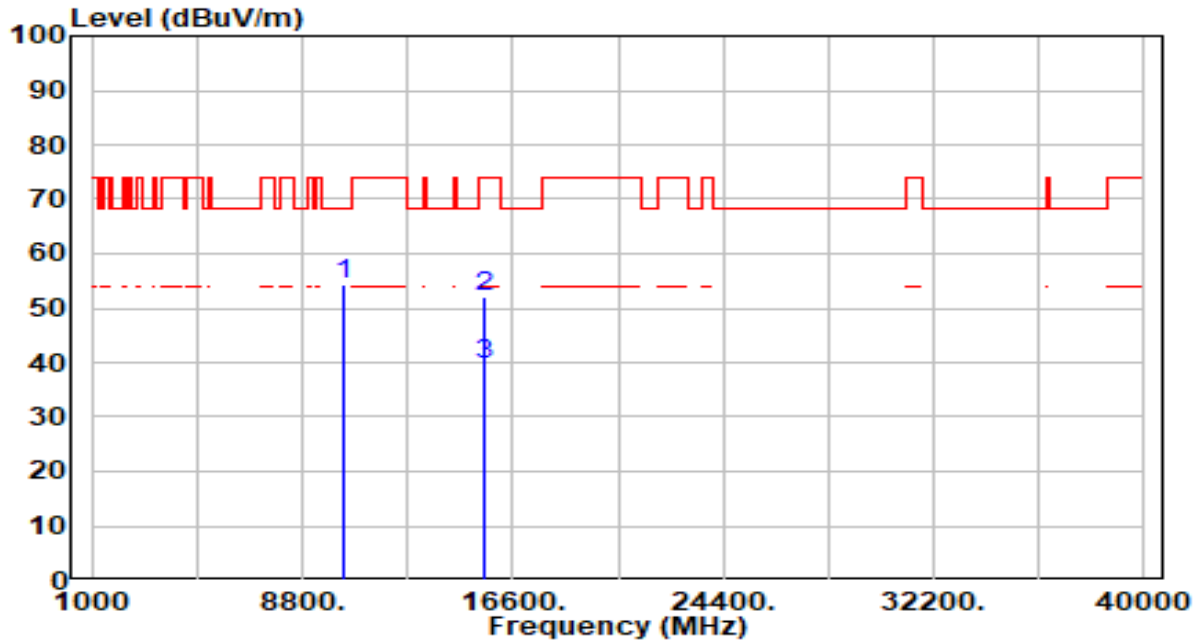


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10360.000	47.37	6.84	54.21	-13.99	68.20	100	225	Peak
2		15540.000	43.54	8.70	52.24	-21.76	74.00	100	145	Peak
3	*	15540.000	30.85	8.70	39.55	-14.45	54.00	100	145	Average

Note:

1. " * ", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11a_TX_Band1_CH 36_ANT 6+7	Test Voltage	By Notebook PC

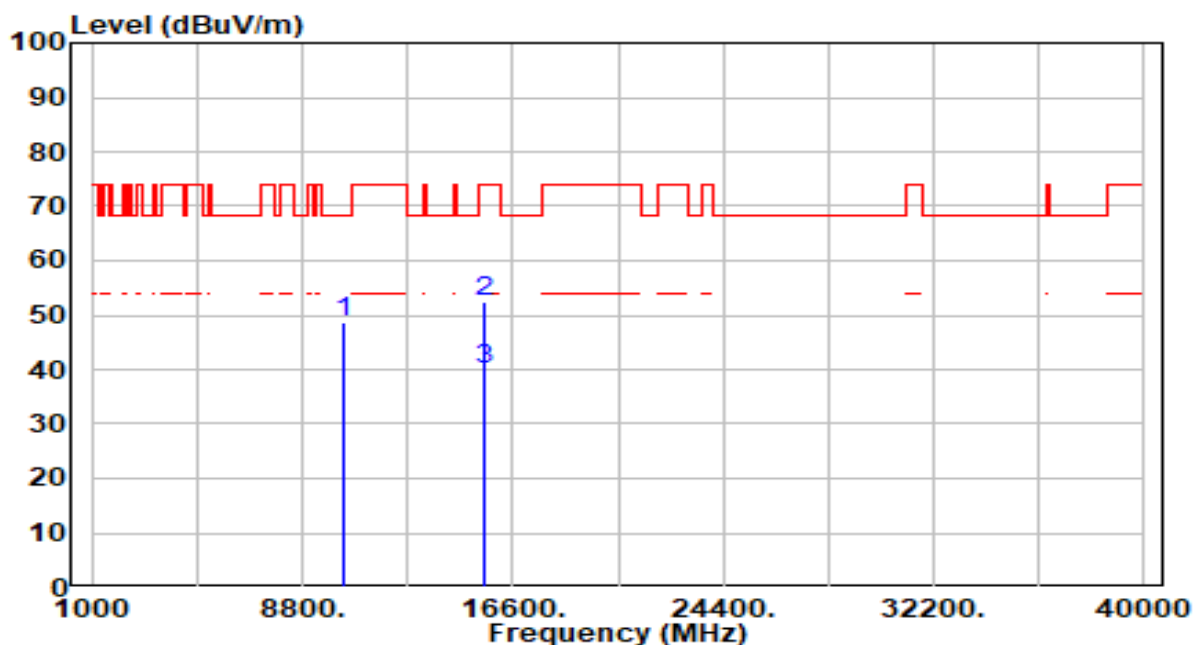


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10360.000	41.93	6.84	48.78	-19.42	68.20	100	168	Peak
2		15540.000	43.73	8.70	52.43	-21.57	74.00	100	122	Peak
3	*	15540.000	31.21	8.70	39.91	-14.09	54.00	100	122	Average

Note:

1. " * ", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11a_TX_Band1_CH 40_ANT 6+7	Test Voltage	By Notebook PC

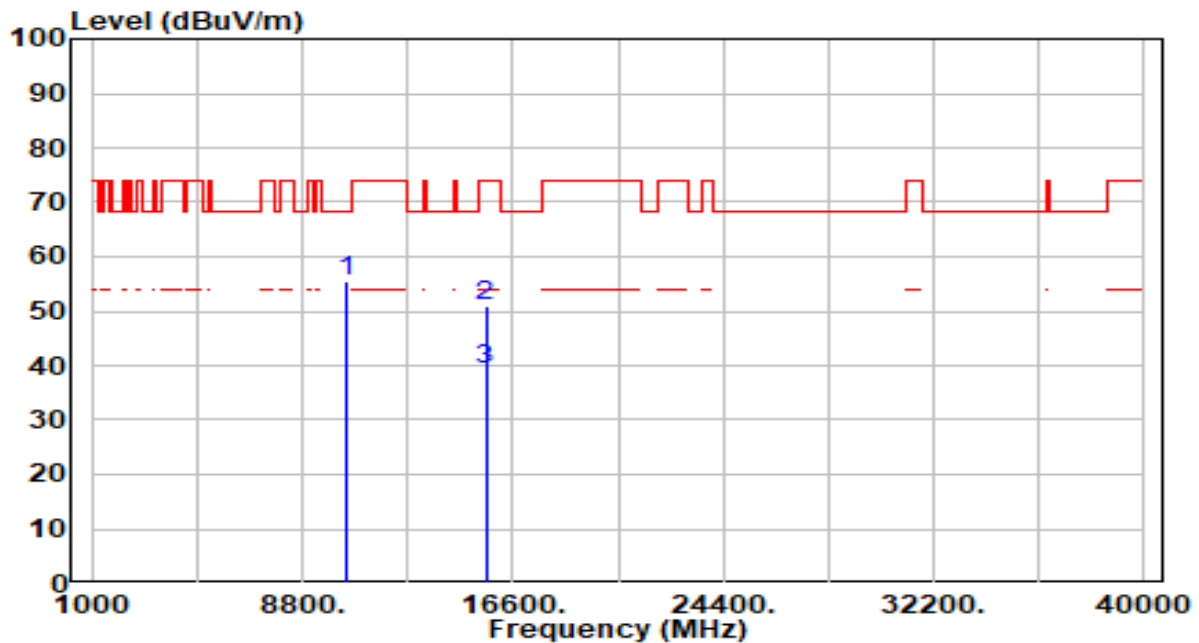


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10400.000	48.66	6.82	55.48	-12.72	68.20	100	191	Peak
2		15600.000	42.51	8.62	51.12	-22.88	74.00	100	113	Peak
3	*	15600.000	30.58	8.62	39.20	-14.80	54.00	100	113	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11a_TX_Band1_CH 40_ANT 6+7	Test Voltage	By Notebook PC

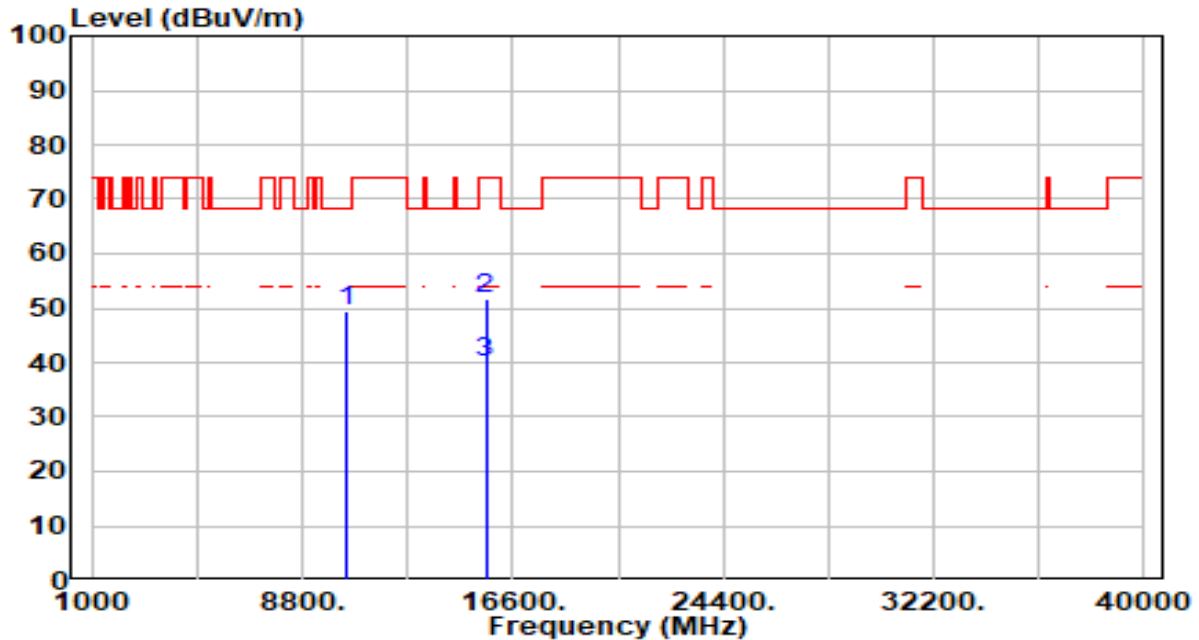


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10400.000	42.61	6.82	49.42	-18.78	68.20	100	332	Peak
2		15600.000	43.26	8.62	51.87	-22.13	74.00	100	291	Peak
3	*	15600.000	31.26	8.62	39.88	-14.12	54.00	100	291	Average

Note:

1. " * ", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11a_TX_Band1_CH 48_ANT 6+7	Test Voltage	By Notebook PC

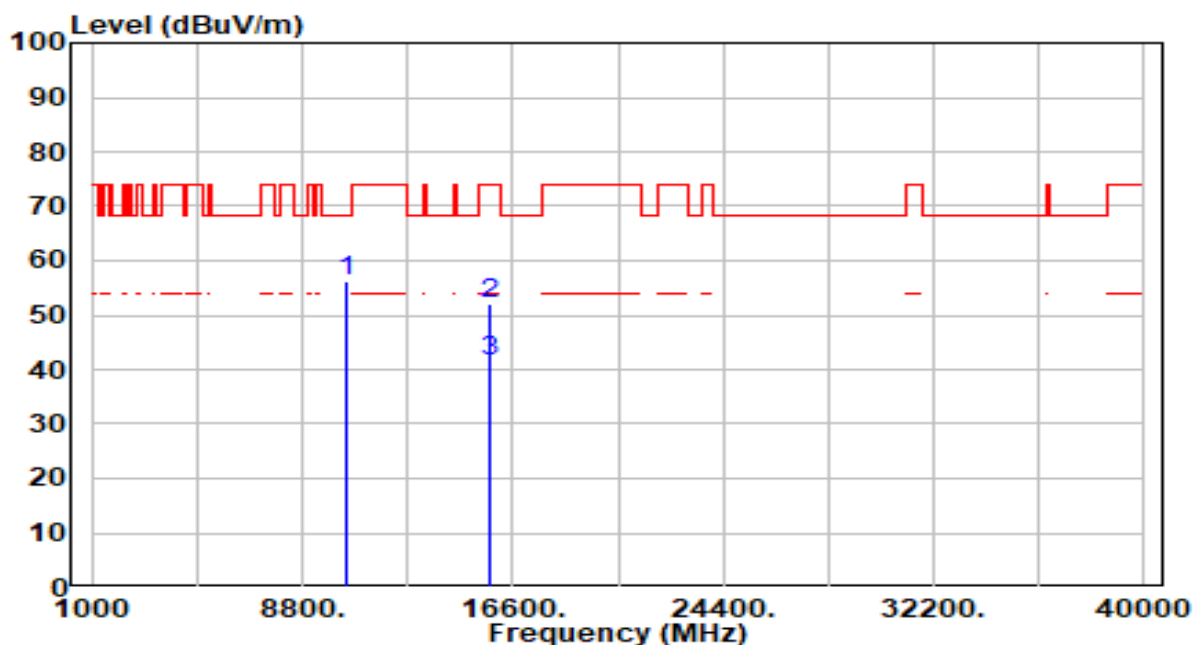


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10480.000	49.44	6.74	56.17	-12.03	68.20	100	225	Peak
2		15720.000	43.23	8.90	52.14	-21.86	74.00	100	143	Peak
3	*	15720.000	32.63	8.90	41.53	-12.47	54.00	100	143	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11a_TX_Band1_CH 48_ANT 6+7	Test Voltage	By Notebook PC

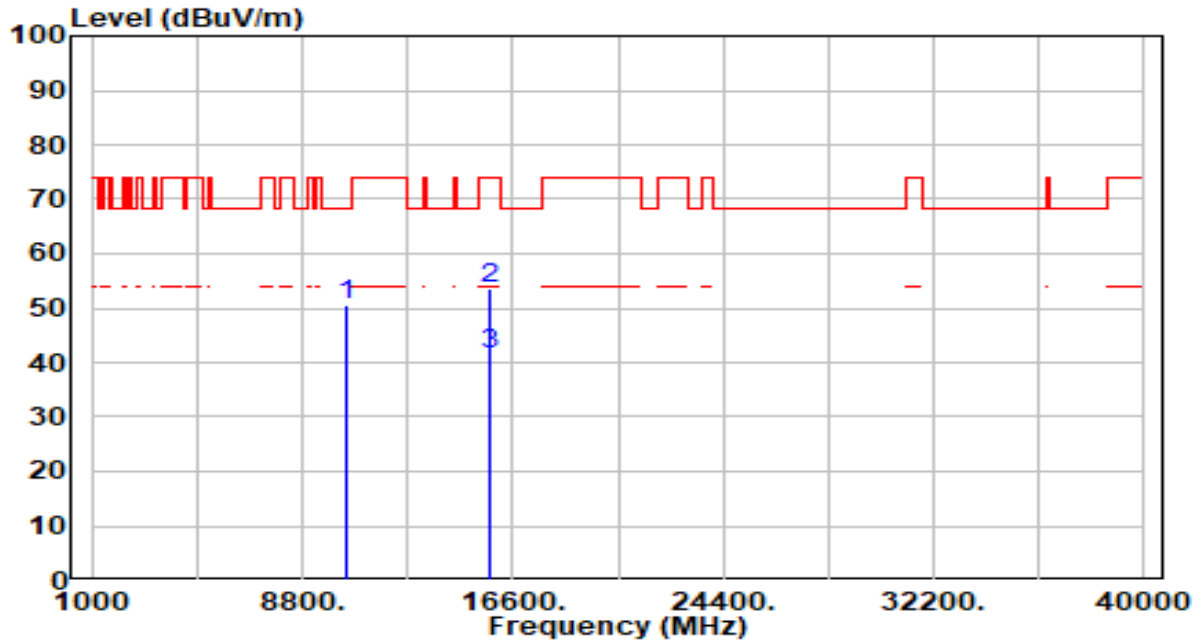


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10480.000	43.73	6.74	50.46	-17.74	68.20	100	120	Peak
2		15720.000	44.71	8.90	53.61	-20.39	74.00	100	7	Peak
3	*	15720.000	32.62	8.90	41.52	-12.48	54.00	100	7	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11a_TX_Band2_CH 52_ANT 6+7	Test Voltage	By Notebook PC

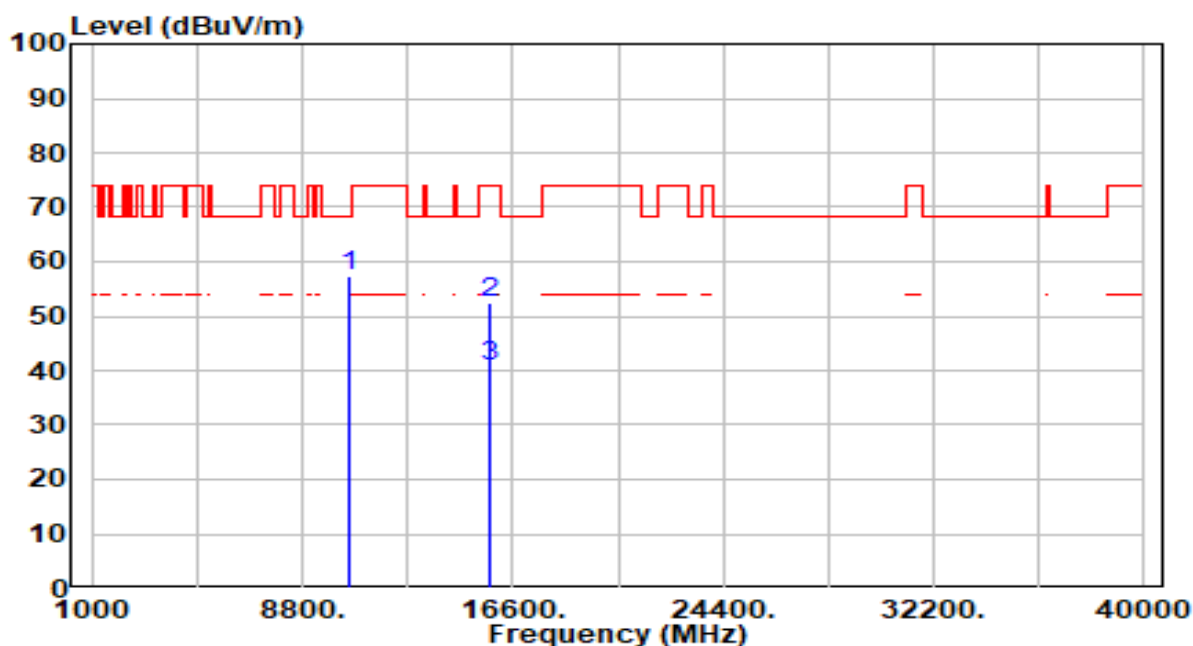


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10520.000	50.56	6.70	57.26	-10.94	68.20	100	268	Peak
2		15780.000	43.50	9.00	52.50	-21.50	74.00	100	164	Peak
3	*	15780.000	31.63	9.00	40.63	-13.37	54.00	100	164	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11a_TX_Band2_CH 52_ANT 6+7	Test Voltage	By Notebook PC

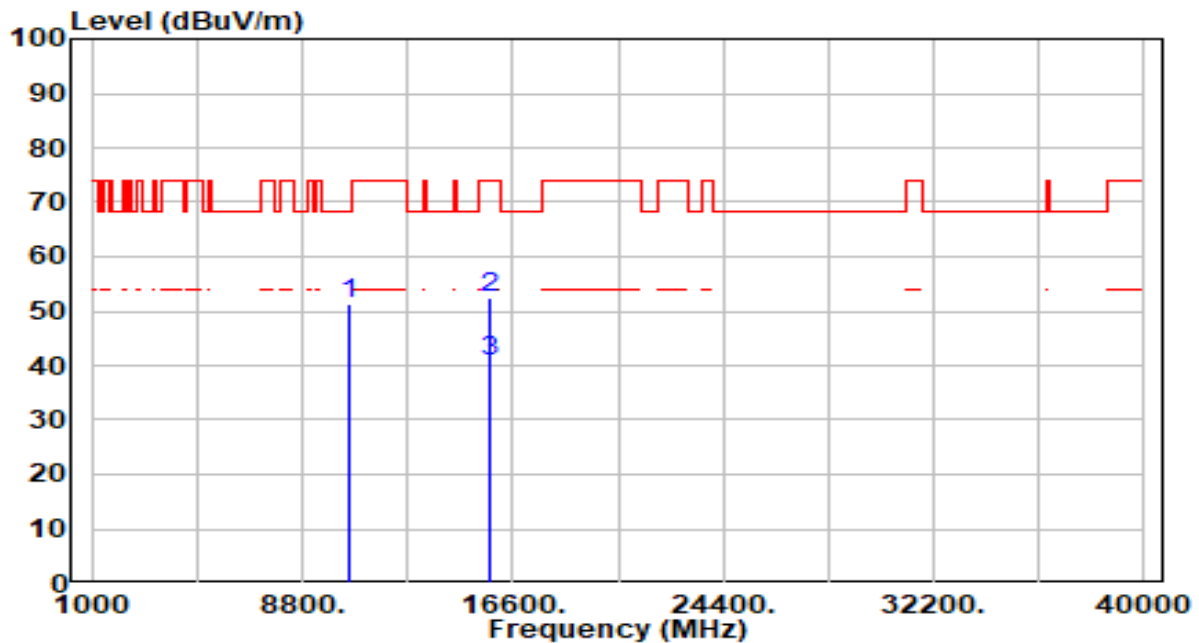


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10520.000	44.50	6.70	51.19	-17.01	68.20	100	331	Peak
2		15780.000	43.30	9.00	52.30	-21.70	74.00	100	307	Peak
3	*	15780.000	31.93	9.00	40.93	-13.07	54.00	100	307	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11a_TX_Band2_CH 60_ANT 6+7	Test Voltage	By Notebook PC

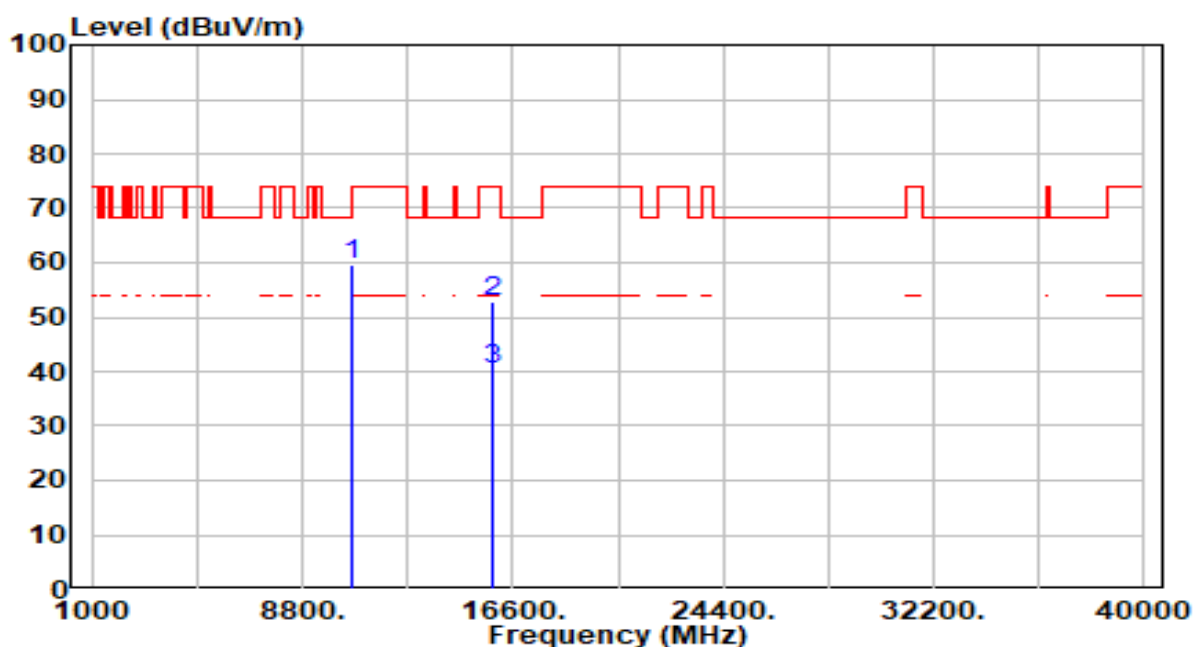


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10600.000	53.18	6.62	59.79	-8.41	68.20	100	207	Peak
2		15900.000	43.75	9.16	52.91	-21.09	74.00	100	178	Peak
3	*	15900.000	31.22	9.16	40.38	-13.62	54.00	100	178	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11a_TX_Band2_CH 60_ANT 6+7	Test Voltage	By Notebook PC

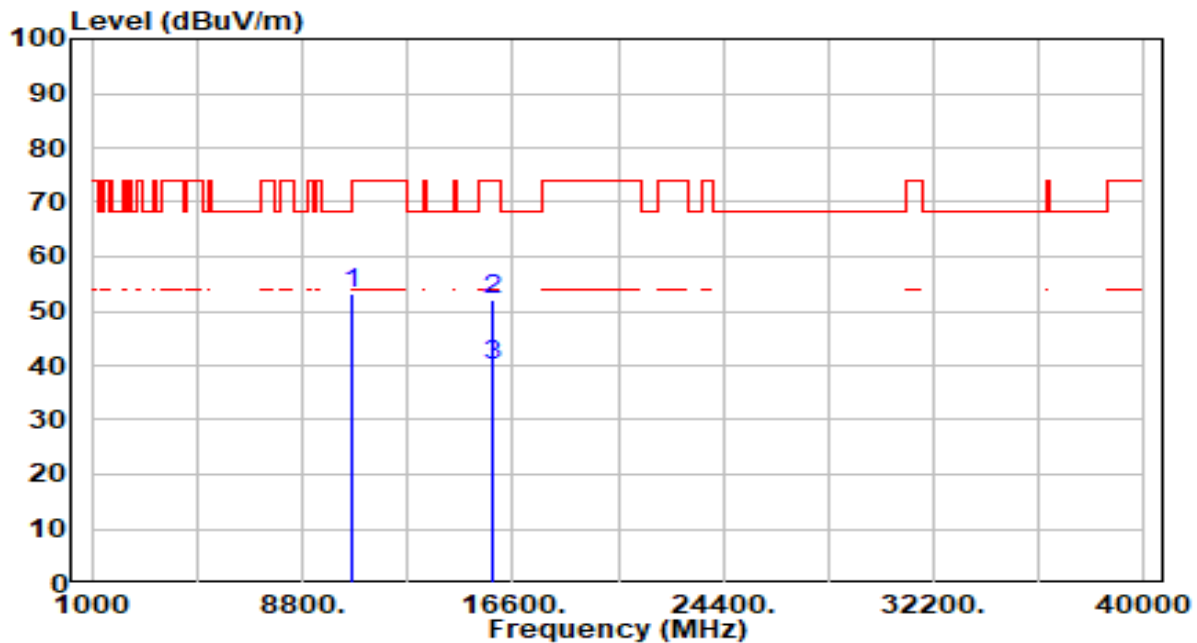


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10600.000	46.71	6.62	53.32	-14.88	68.20	100	315	Peak
2		15900.000	42.76	9.16	51.92	-22.08	74.00	100	6	Peak
3	*	15900.000	30.95	9.16	40.11	-13.89	54.00	100	6	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band2_CH 64_ANT 6+7	Test Voltage	By Notebook PC

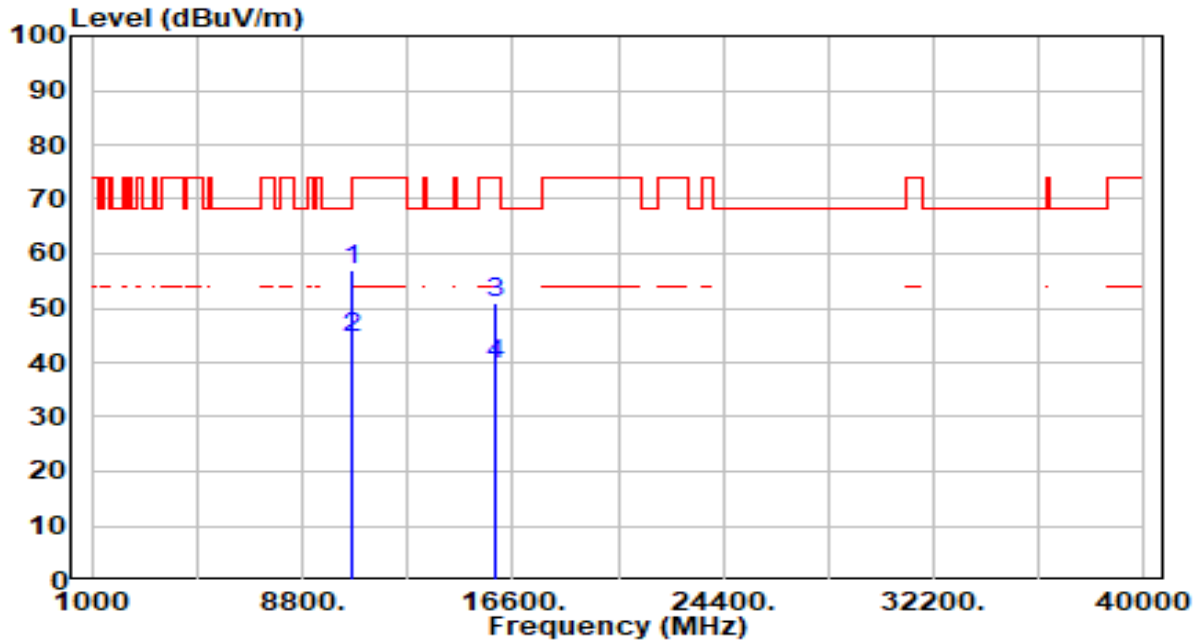


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10640.000	50.41	6.63	57.04	-16.96	74.00	100	180	Peak
2	*	10640.000	37.72	6.63	44.35	-9.65	54.00	100	180	Average
3		15960.000	41.92	9.13	51.05	-22.95	74.00	100	340	Peak
4		15960.000	30.63	9.13	39.76	-14.24	54.00	100	340	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band2_CH 64_ANT 6+7	Test Voltage	By Notebook PC

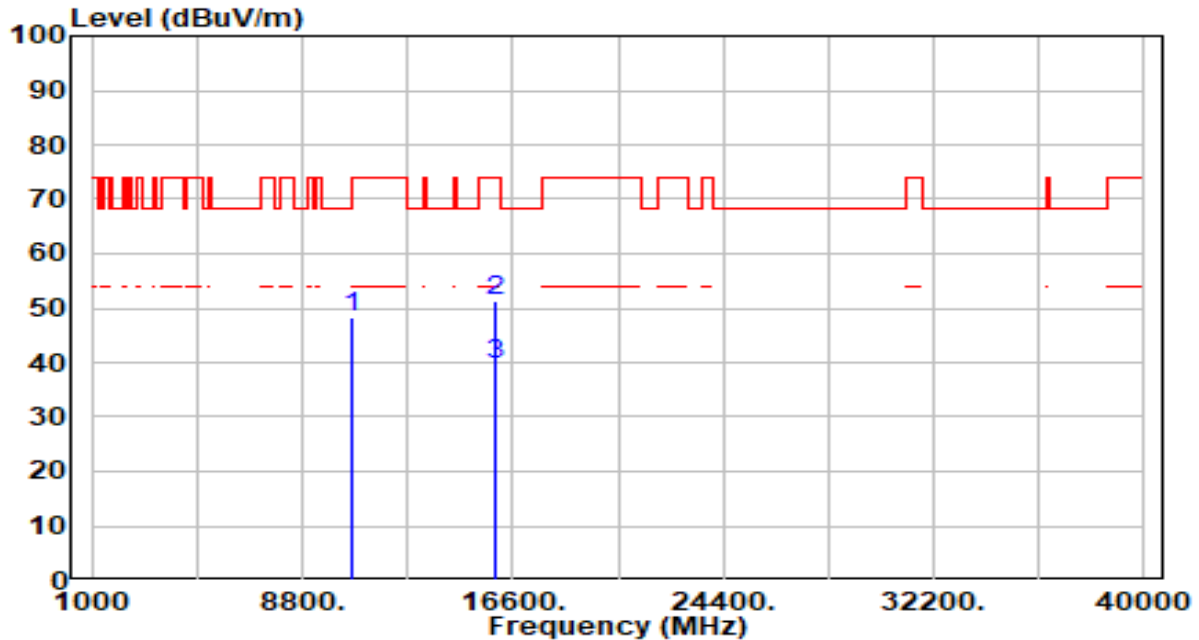


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		10640.000	41.66	6.63	48.29	-25.71	74.00	100	20	Peak
2	*	15960.000	42.14	9.13	51.27	-22.73	74.00	100	280	Peak
3	*	15960.000	30.41	9.13	39.54	-14.46	54.00	100	280	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band3_CH 100_ANT 6+7	Test Voltage	By Notebook PC

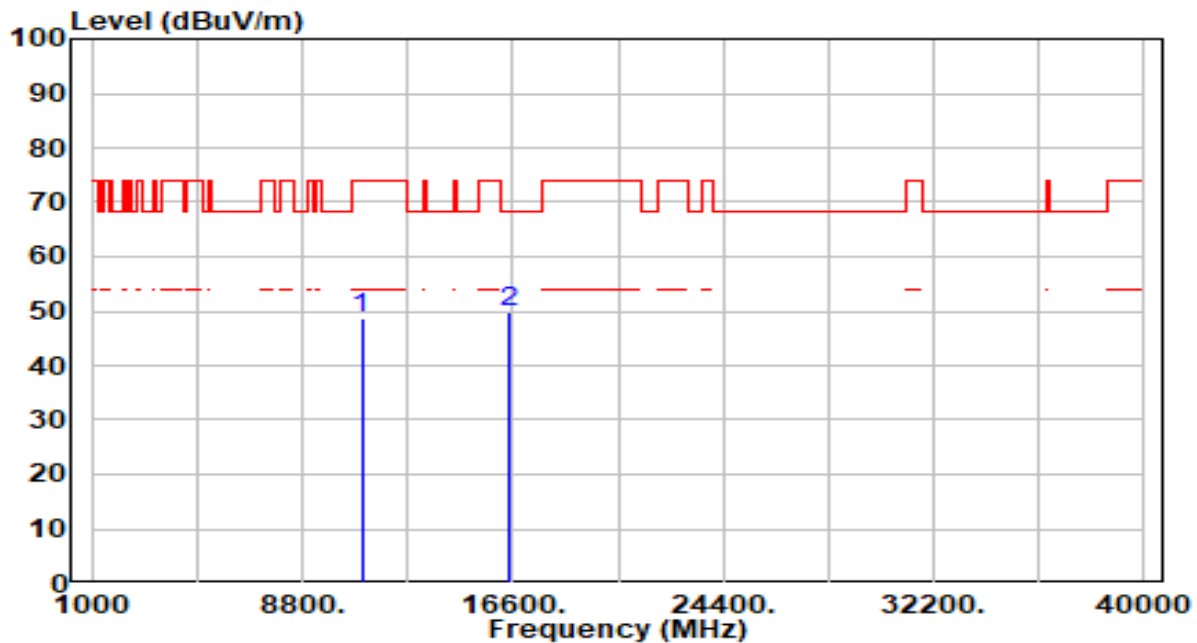


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11000.000	42.24	6.40	48.64	-25.36	74.00	100	192	Peak
2	*	16500.000	41.08	8.74	49.82	-18.38	68.20	100	31	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band3_CH 100_ANT 6+7	Test Voltage	By Notebook PC

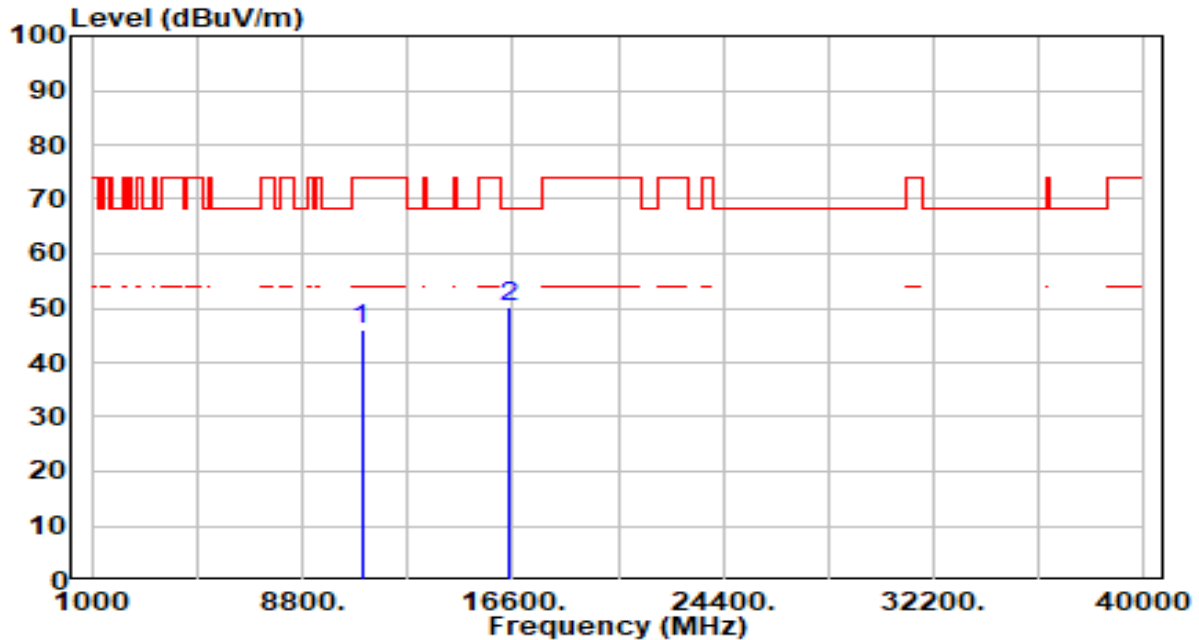


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11000.000	39.55	6.40	45.95	-28.05	74.00	100	199	Peak
2	* 16500.000	41.27	8.74	50.01	-18.19	68.20	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band3_CH 116_ANT 6+7	Test Voltage	By Notebook PC

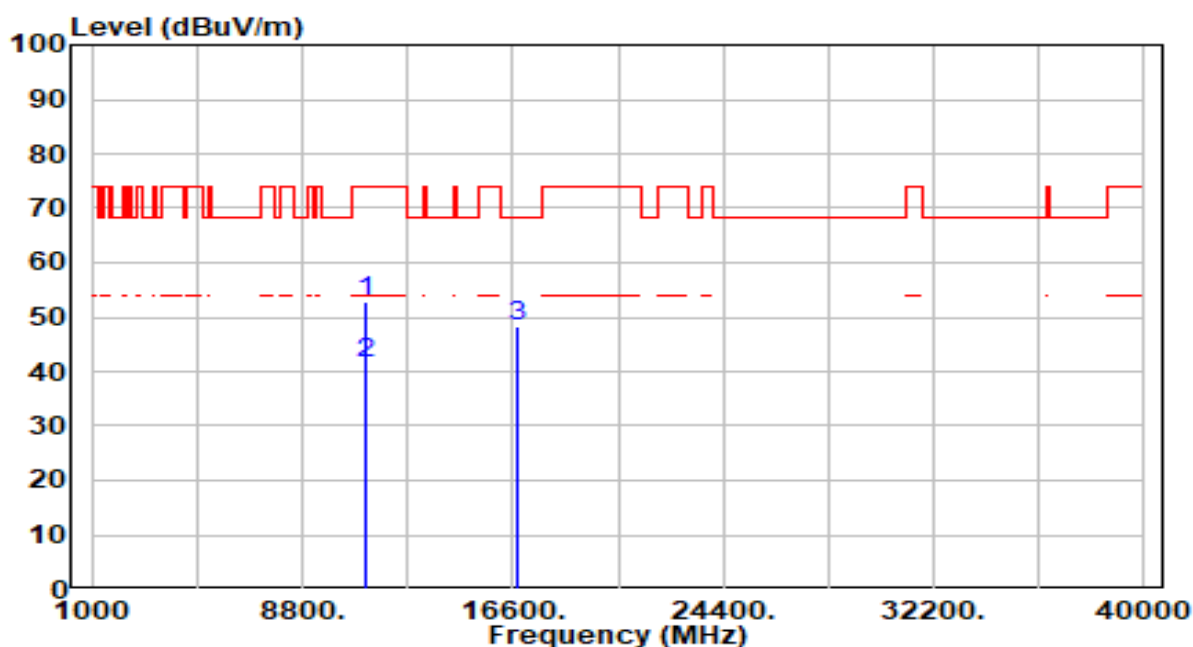


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11160.000	45.94	6.78	52.72	-21.28	74.00	100	193	Peak
2	*	11160.000	34.70	6.78	41.48	-12.52	54.00	100	193	Average
3	*	16740.000	39.43	8.71	48.15	-20.05	68.20	100	184	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band3_CH 116_ANT 6+7	Test Voltage	By Notebook PC

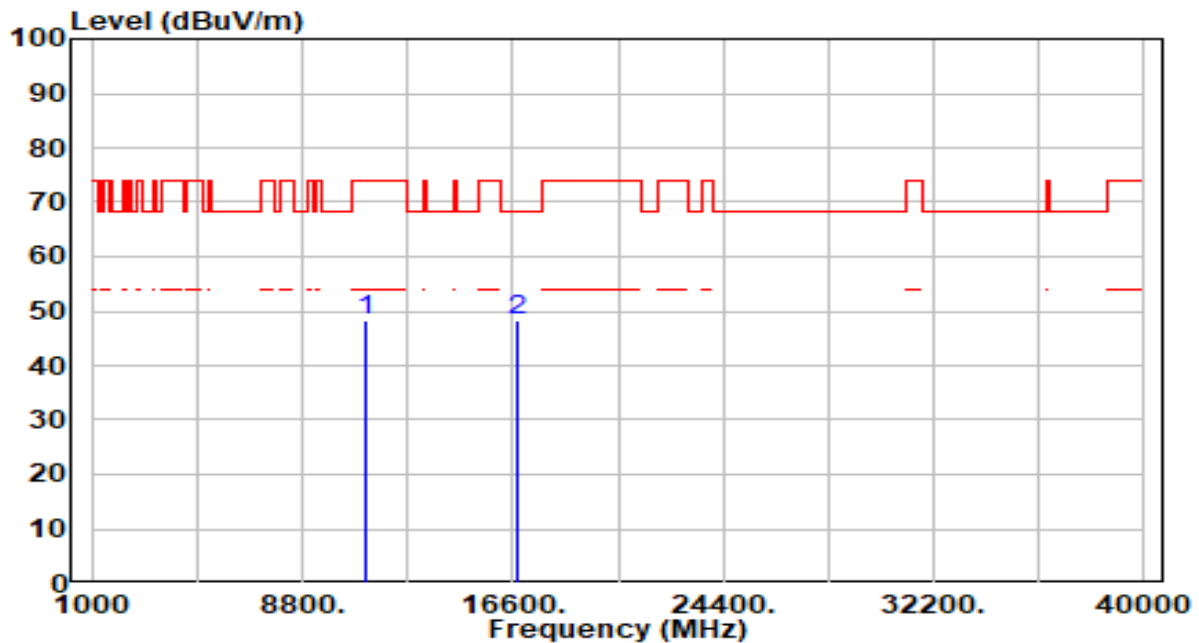


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11160.000	41.51	6.78	48.29	-25.71	74.00	100	88	Peak
2	* 16740.000	39.75	8.71	48.46	-19.74	68.20	100	173	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band3_CH 140_ANT 6+7	Test Voltage	By Notebook PC

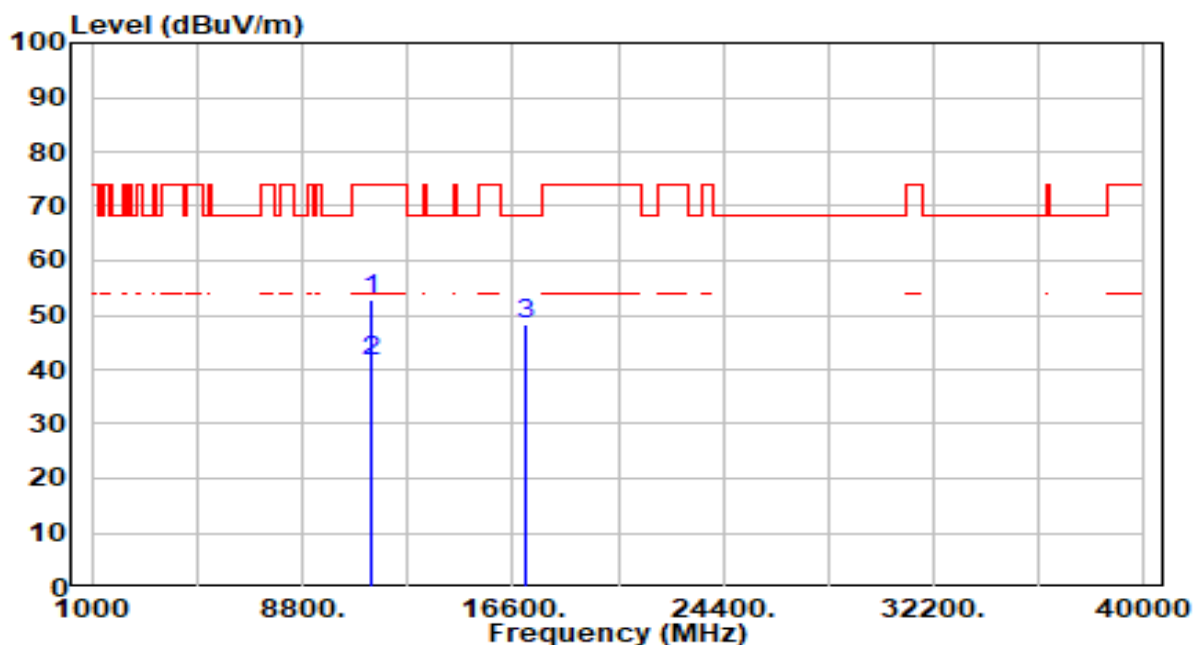


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11400.000	45.72	7.21	52.93	-21.07	74.00	100	122	Peak
2	*	11400.000	34.46	7.21	41.67	-12.33	54.00	100	122	Average
3	*	17100.000	40.20	8.22	48.42	-19.78	68.20	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band3_CH 140_ANT 6+7	Test Voltage	By Notebook PC

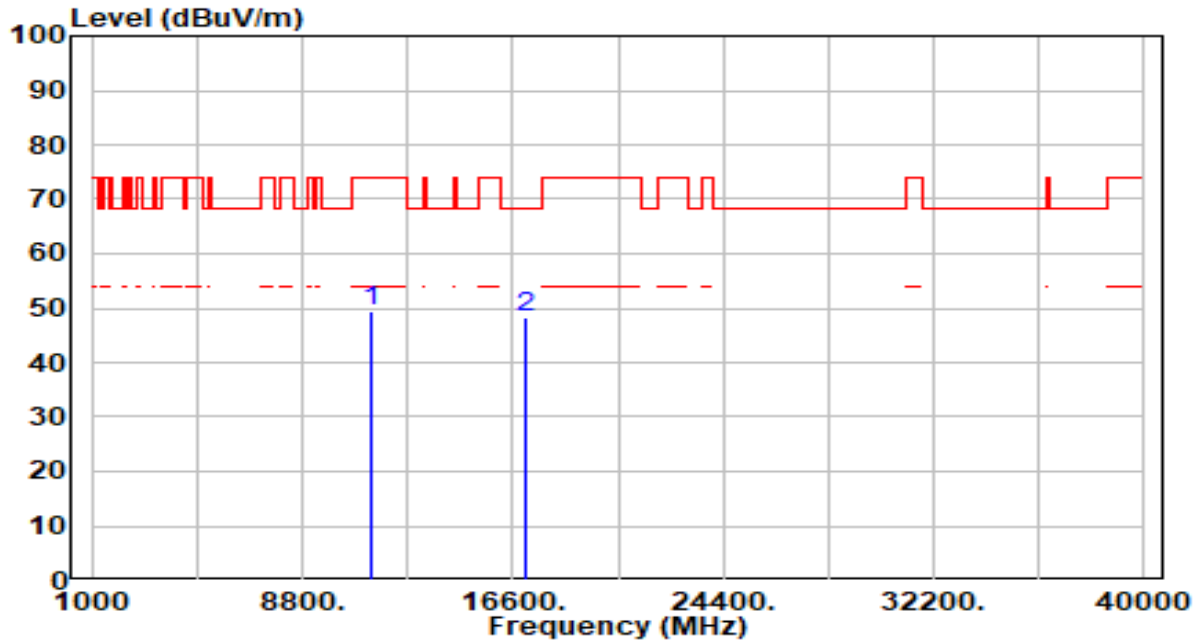


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11400.000	42.20	7.21	49.41	-24.59	74.00	100	360	Peak
2	* 17100.000	39.91	8.22	48.13	-20.07	68.20	100	130	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band3_CH 144_ANT 6+7	Test Voltage	By Notebook PC

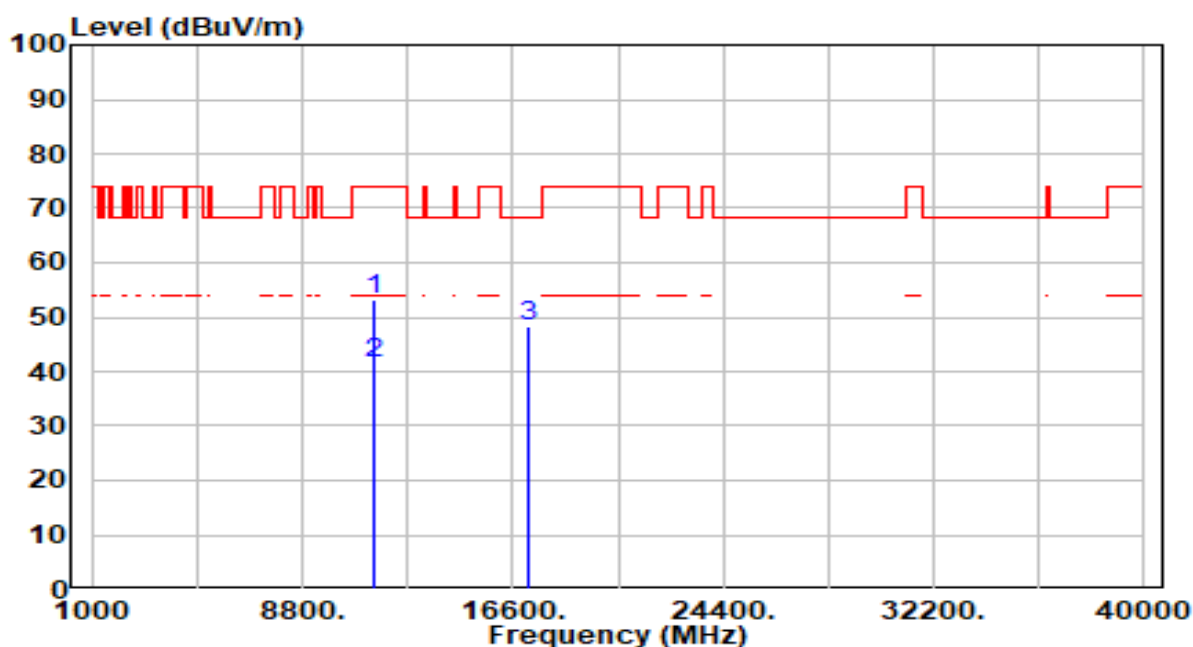


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11440.000	46.13	7.20	53.33	-20.67	74.00	100	165	Peak
2	*	11440.000	34.26	7.20	41.46	-12.54	54.00	100	165	Average
3	*	17160.000	40.10	8.09	48.19	-20.01	68.20	100	69	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band3_CH 144_ANT 6+7	Test Voltage	By Notebook PC

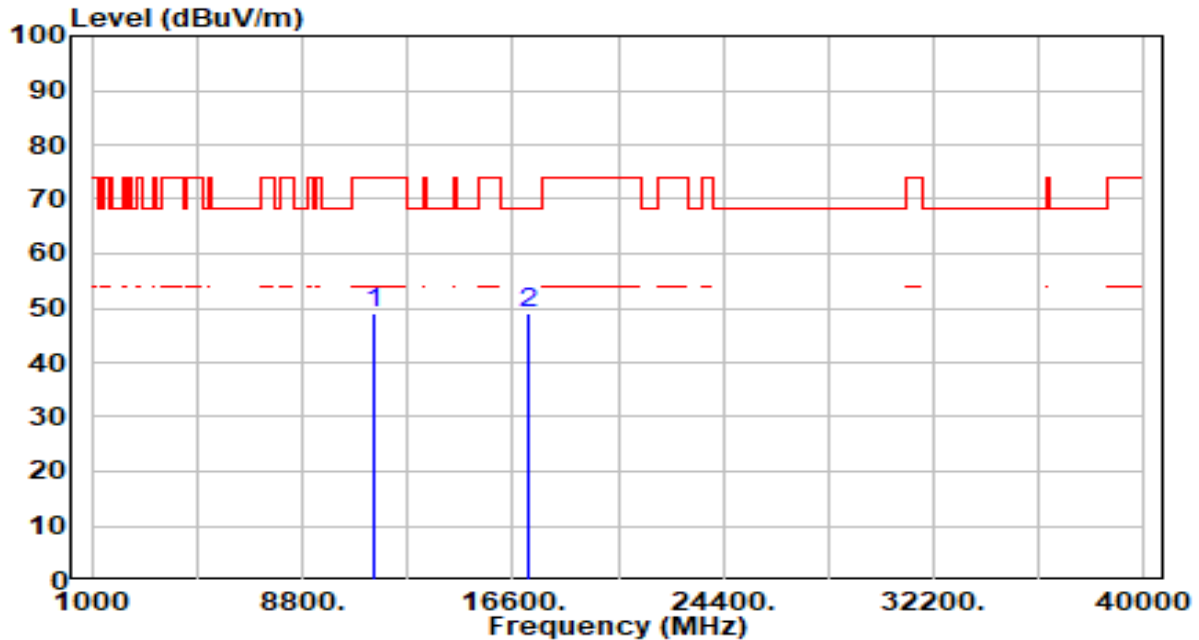


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11440.000	41.86	7.20	49.06	-24.94	74.00	100	91	Peak
2	* 17160.000	41.00	8.09	49.09	-19.11	68.20	100	320	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band4_CH 149_ANT 6+7	Test Voltage	By Notebook PC

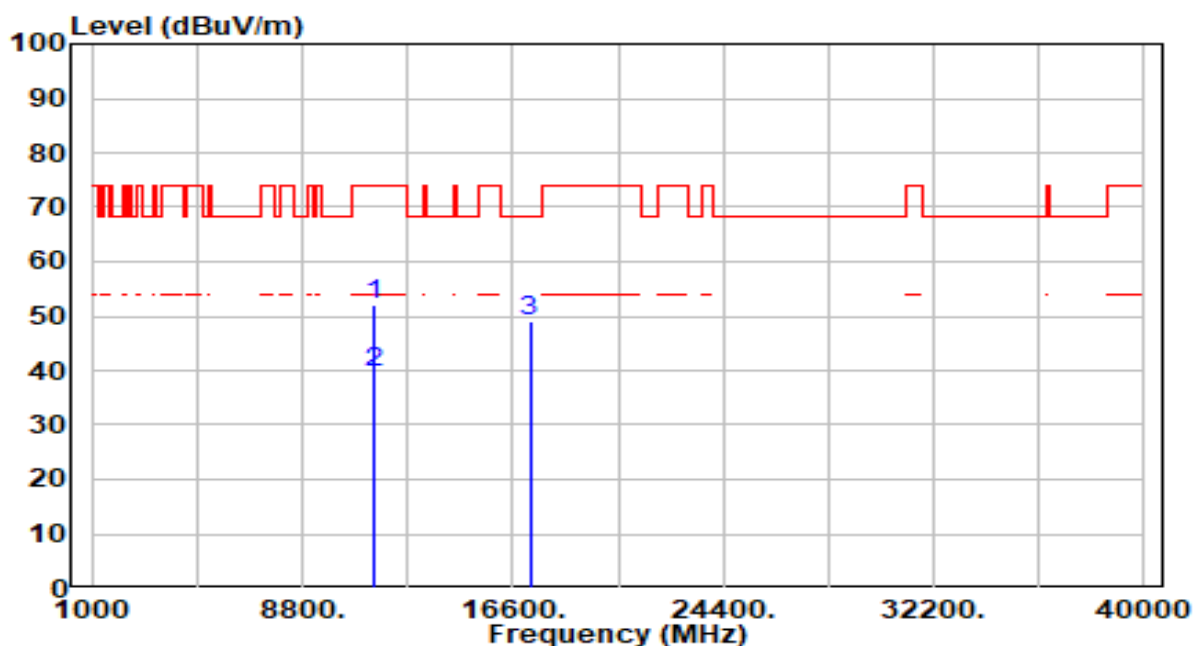


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11490.000	44.83	7.19	52.02	-21.98	74.00	100	182	Peak
2	*	11490.000	32.44	7.19	39.63	-14.37	54.00	100	182	Average
3	*	17235.000	41.09	7.87	48.96	-19.24	68.20	100	121	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band4_CH 149_ANT 6+7	Test Voltage	By Notebook PC

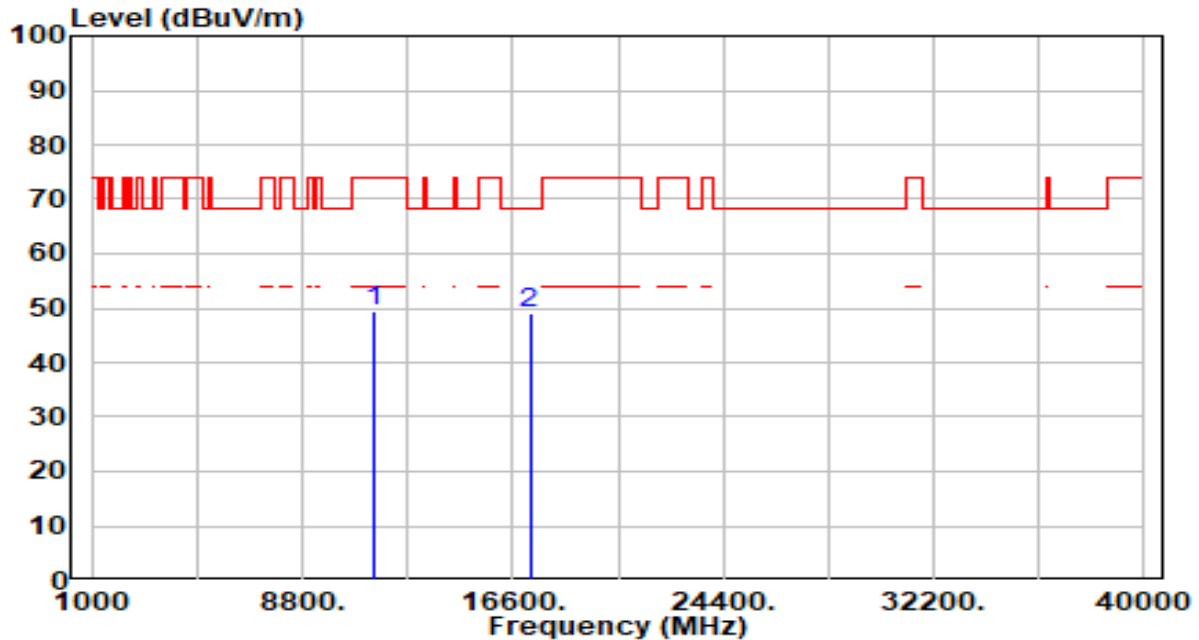


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11490.000	42.19	7.19	49.37	-24.63	74.00	100	42	Peak
2	* 17235.000	41.28	7.87	49.16	-19.04	68.20	100	68	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band4_CH 157_ANT 6+7	Test Voltage	By Notebook PC

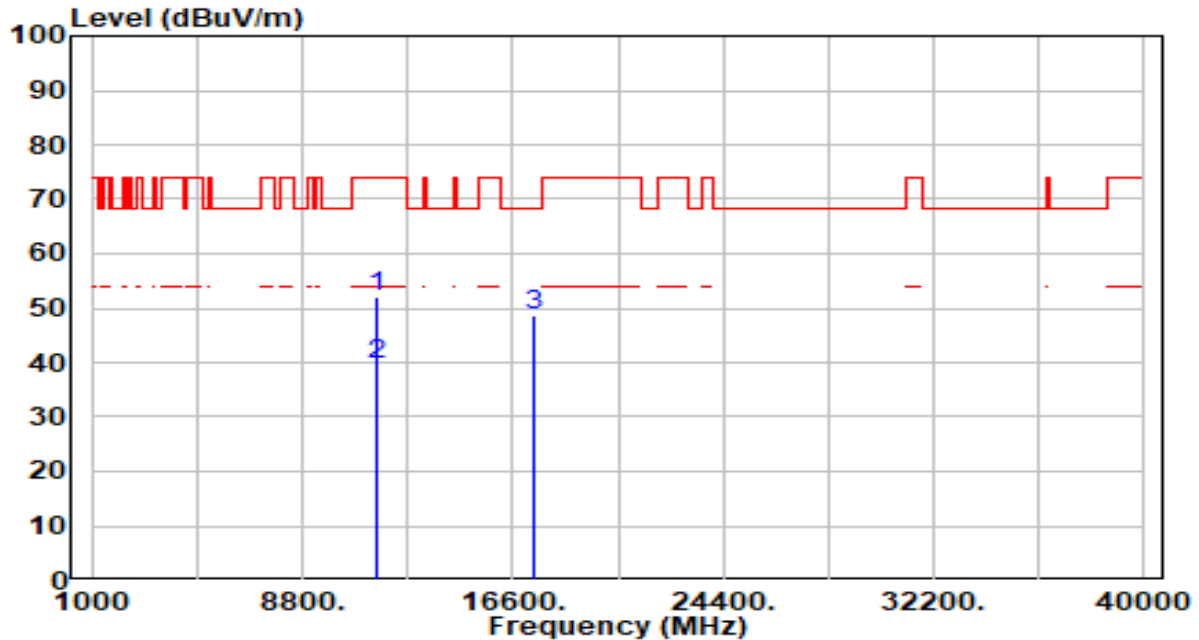


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11570.000	44.88	7.22	52.10	-21.90	74.00	100	160	Peak
2	*	11570.000	32.50	7.22	39.72	-14.28	54.00	100	160	Average
3	*	17355.000	41.52	7.35	48.86	-19.34	68.20	100	267	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band4_CH 157_ANT 6+7	Test Voltage	By Notebook PC

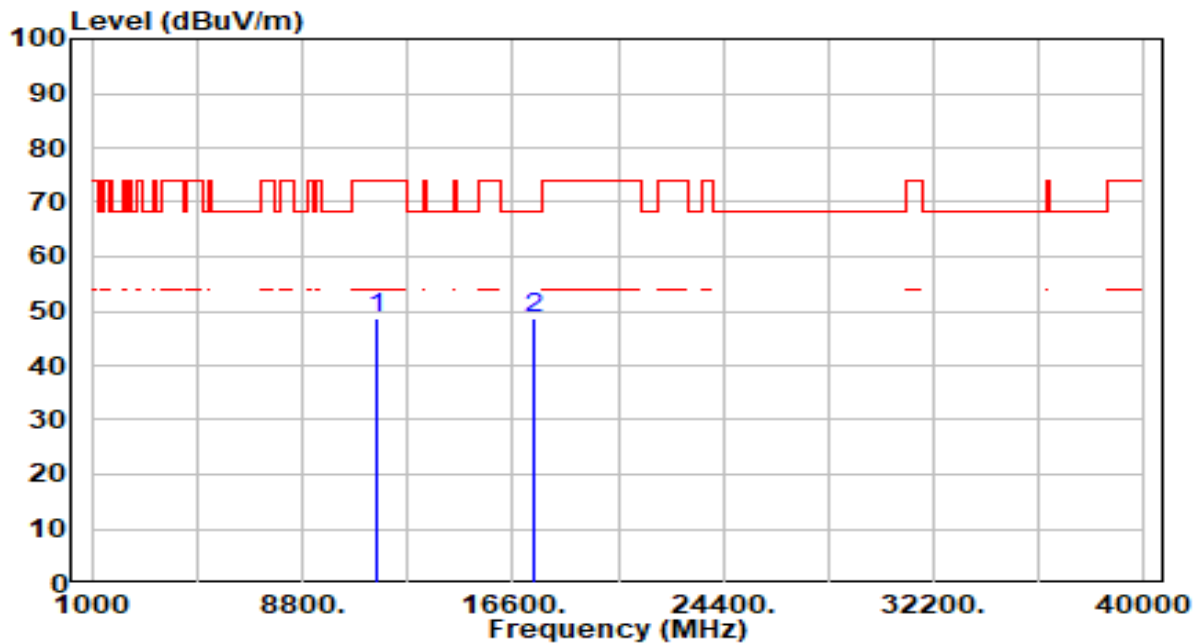


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11570.000	41.28	7.22	48.50	-25.50	74.00	100	242	Peak
2	* 17355.000	41.33	7.35	48.68	-19.52	68.20	100	300	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band4_CH 165_ANT 6+7	Test Voltage	By Notebook PC

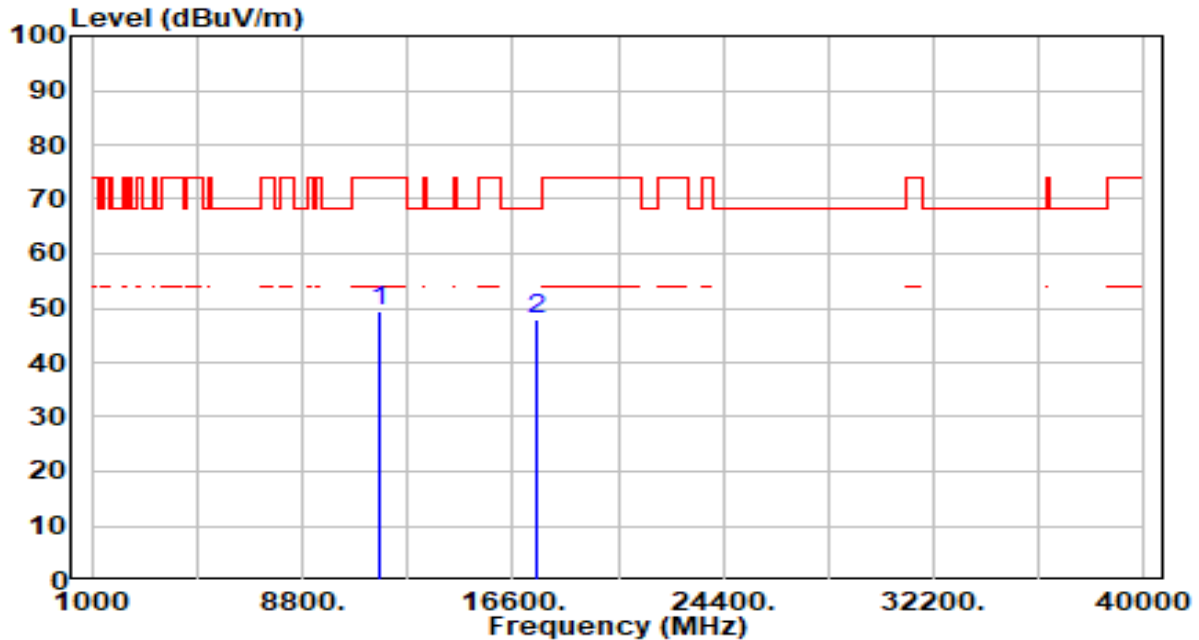


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11650.000	42.29	7.22	49.51	-24.49	74.00	100	154	Peak
2	* 17475.000	40.36	7.41	47.77	-20.43	68.20	100	212	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band4_CH 165_ANT 6+7	Test Voltage	By Notebook PC

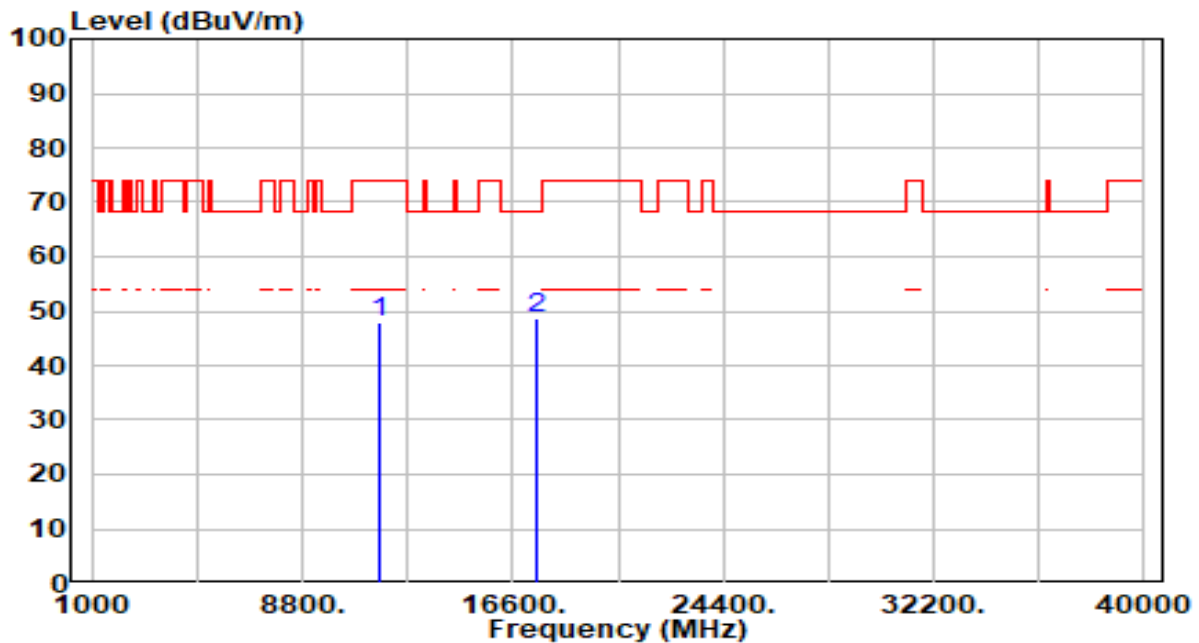


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11650.000	40.84	7.22	48.06	-25.94	74.00	100	314	Peak
2	*	17475.000	41.19	7.41	48.60	-19.60	68.20	100	187	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 6+7	Test Voltage	By Notebook PC

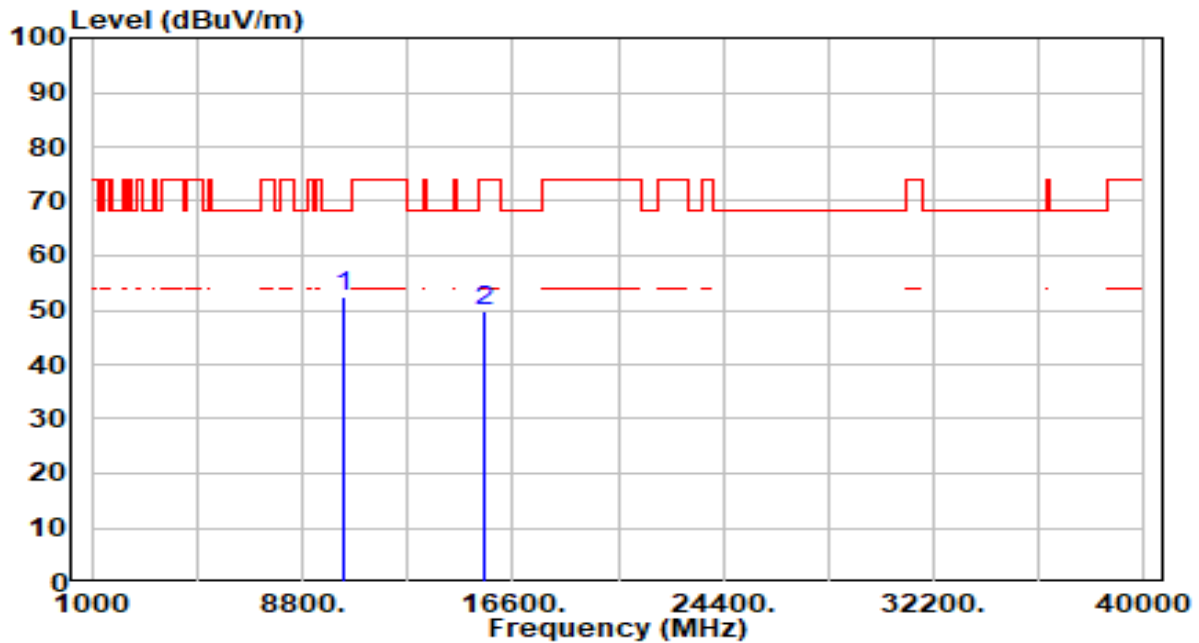


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10360.000	45.53	6.84	52.37	-15.83	68.20	100	227	Peak
2		15540.000	41.27	8.70	49.97	-24.03	74.00	100	260	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 6+7	Test Voltage	By Notebook PC

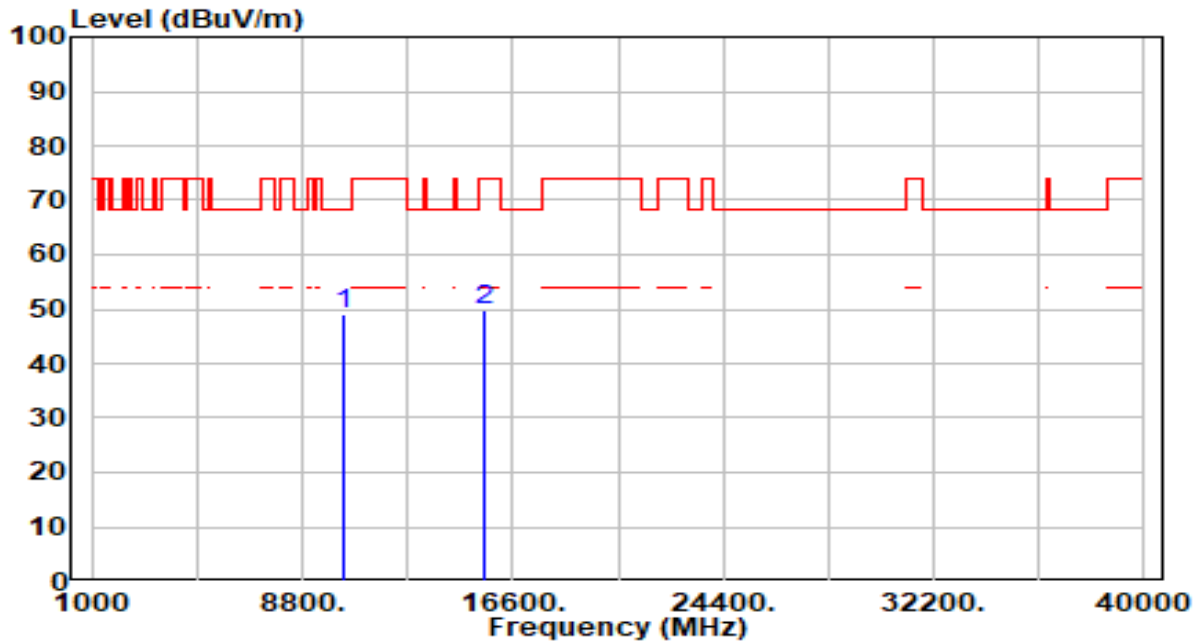


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10360.000	42.23	6.84	49.07	-19.13	68.20	100	225	Peak
2		15540.000	41.29	8.70	49.99	-24.01	74.00	100	294	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-20MHz_TX_Band1_CH 40_ANT 6+7	Test Voltage	By Notebook PC

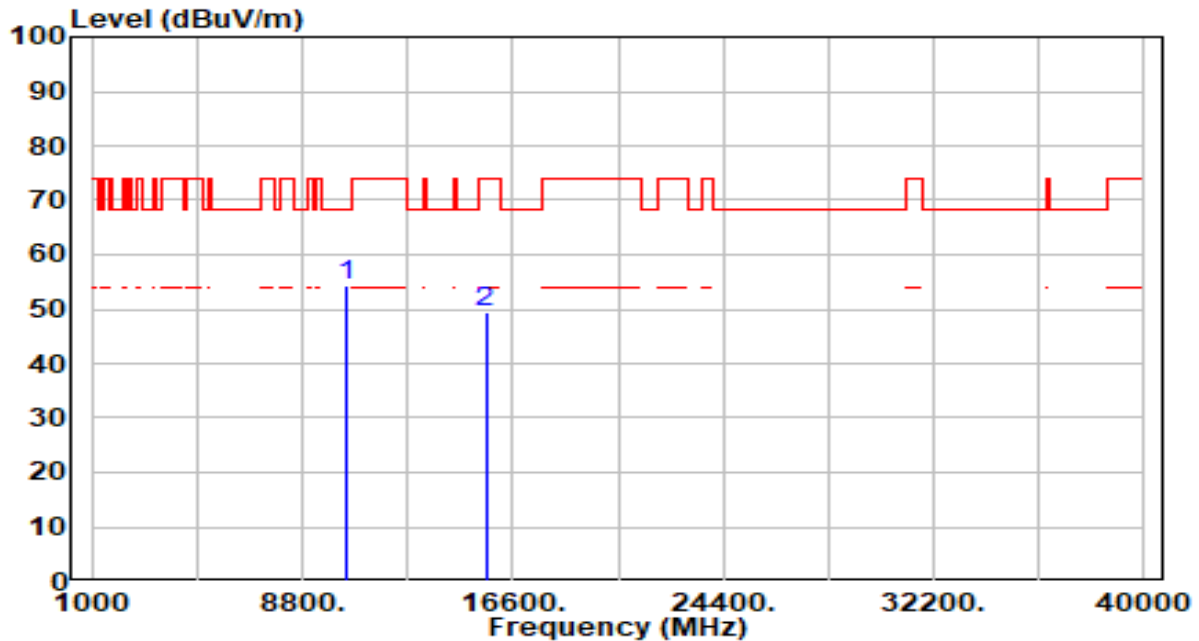


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10400.000	47.34	6.82	54.15	-14.05	68.20	100	220	Peak
2		15600.000	40.77	8.62	49.39	-24.61	74.00	100	129	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-20MHz_TX_Band1_CH 40_ANT 6+7	Test Voltage	By Notebook PC

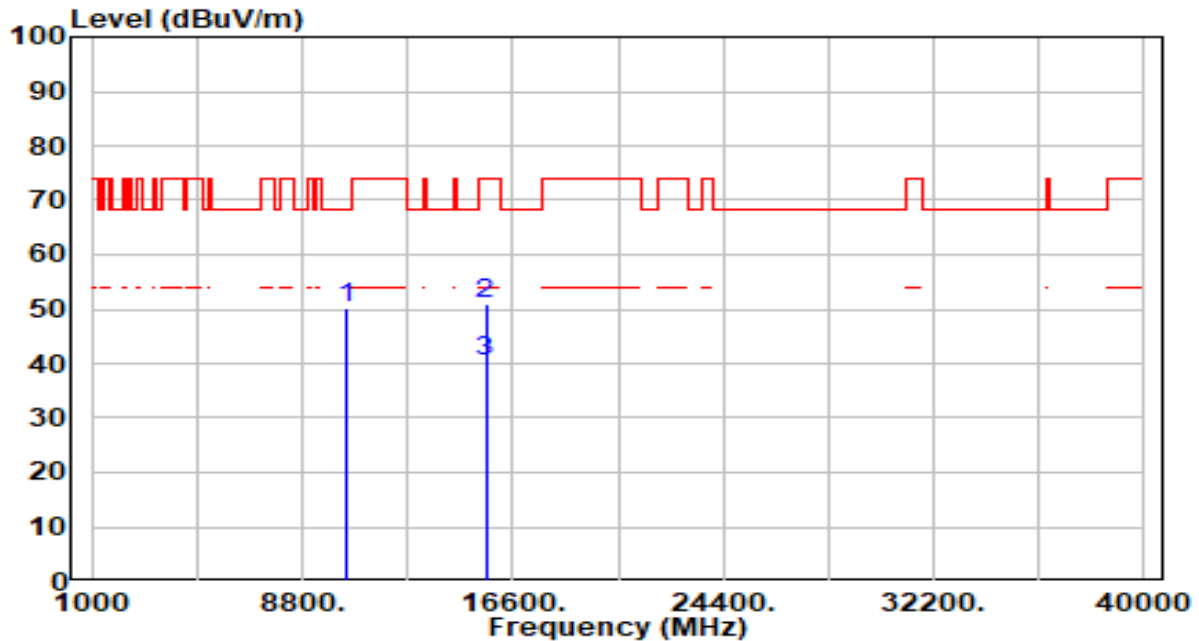


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10400.000	43.39	6.82	50.21	-17.99	68.20	100	323	Peak
2		15600.000	42.31	8.62	50.93	-23.07	74.00	100	0	Peak
3	*	15600.000	31.68	8.62	40.30	-13.70	54.00	100	0	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-20MHz_TX_Band1_CH 48_ANT 6+7	Test Voltage	By Notebook PC

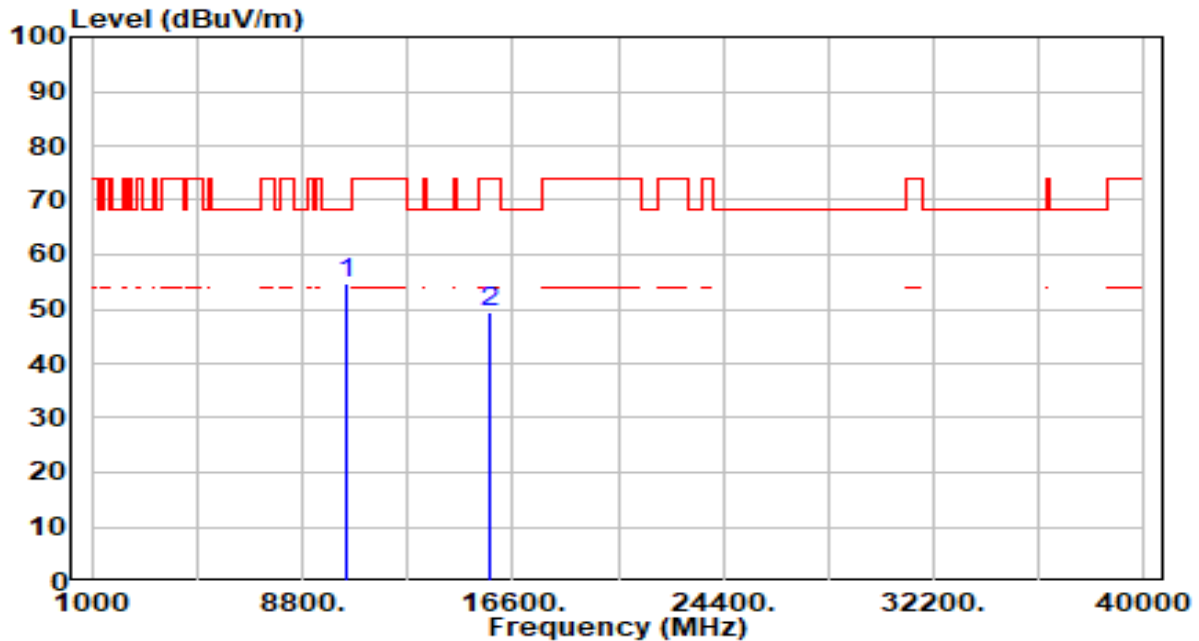


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10480.000	47.87	6.74	54.61	-13.59	68.20	100	185	Peak
2		15720.000	40.53	8.90	49.43	-24.57	74.00	100	326	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-20MHz_TX_Band1_CH 48_ANT 6+7	Test Voltage	By Notebook PC

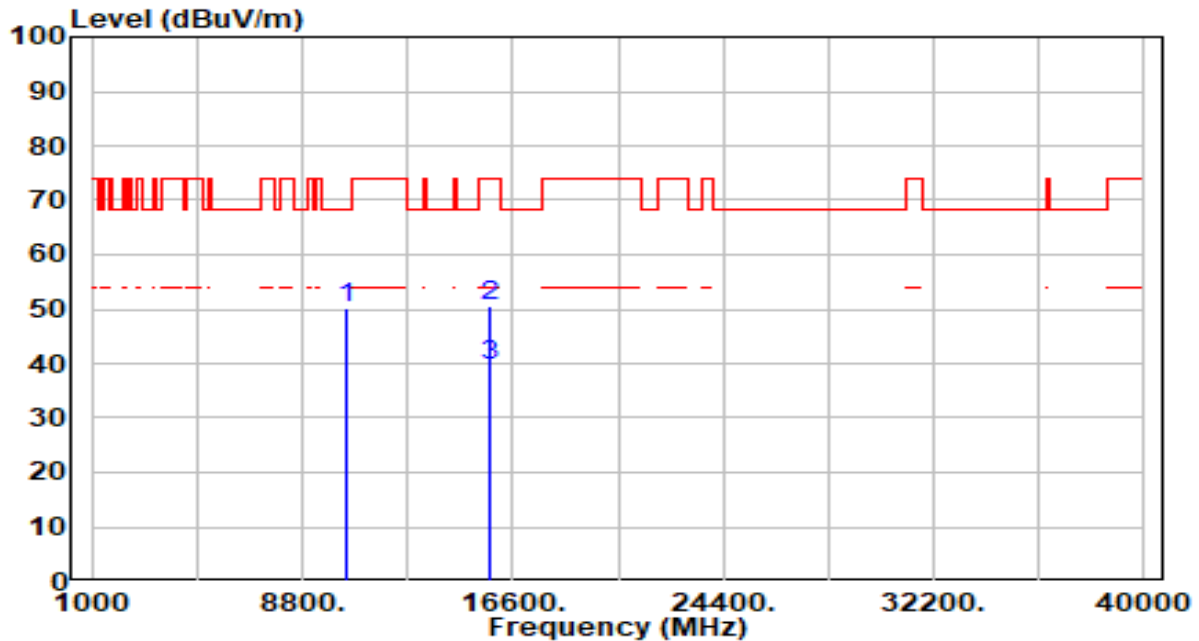


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10480.000	43.44	6.74	50.18	-18.02	68.20	100	317	Peak
2		15720.000	41.64	8.90	50.55	-23.45	74.00	100	99	Peak
3	*	15720.000	30.79	8.90	39.69	-14.31	54.00	100	99	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-20MHz_TX_Band2_CH 52_ANT 6+7	Test Voltage	By Notebook PC

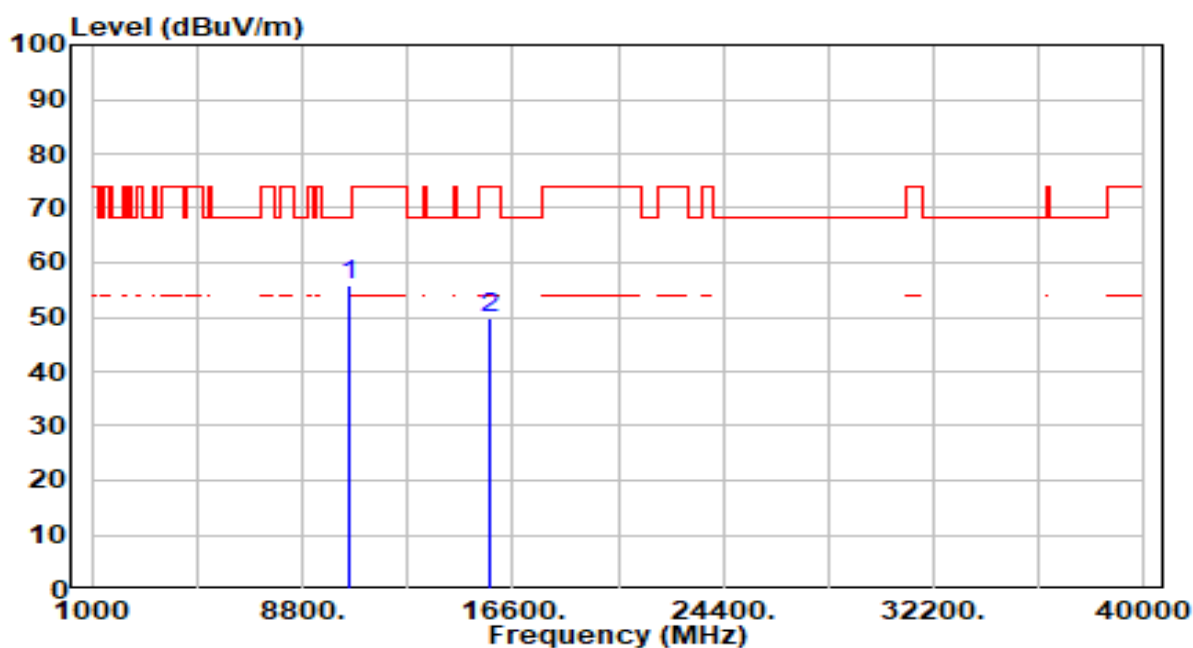


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10520.000	49.06	6.70	55.76	-12.44	68.20	100	193	Peak
2		15780.000	40.93	9.00	49.94	-24.06	74.00	100	294	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-20MHz_TX_Band2_CH 52_ANT 6+7	Test Voltage	By Notebook PC

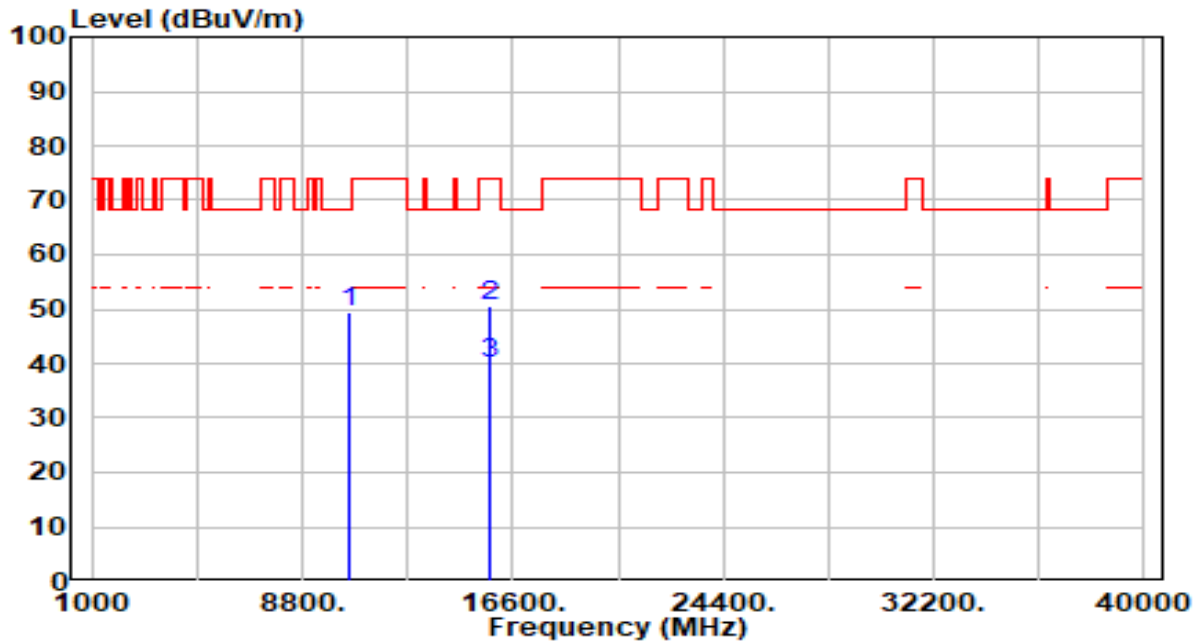


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10520.000	42.79	6.70	49.49	-18.71	68.20	100	254	Peak
2		15780.000	41.48	9.00	50.48	-23.52	74.00	100	64	Peak
3	*	15780.000	30.81	9.00	39.81	-14.19	54.00	100	64	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-20MHz_TX_Band2_CH 60_ANT 6+7	Test Voltage	By Notebook PC

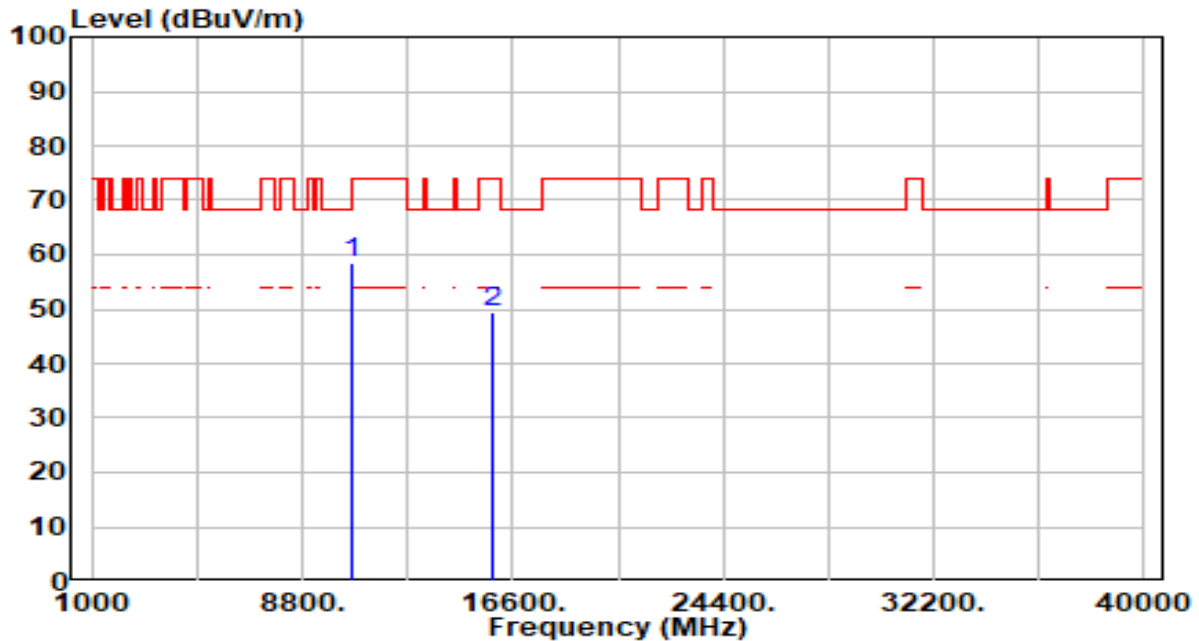


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10600.000	51.98	6.62	58.60	-9.60	68.20	100	239	Peak
2		15900.000	40.46	9.16	49.62	-24.38	74.00	100	126	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-20MHz_TX_Band2_CH 60_ANT 6+7	Test Voltage	By Notebook PC

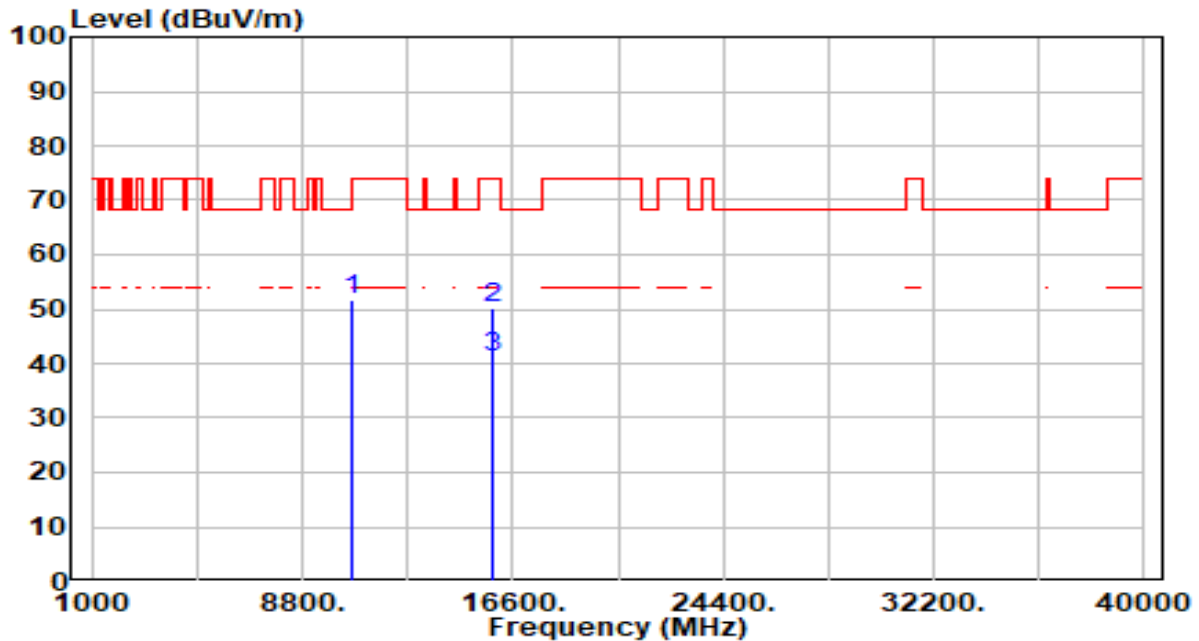


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10600.000	45.23	6.62	51.85	-16.35	68.20	100	321	Peak
2		15900.000	41.05	9.16	50.21	-23.79	74.00	100	346	Peak
3	*	15900.000	32.01	9.16	41.17	-12.83	54.00	100	346	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 6+7	Test Voltage	By Notebook PC

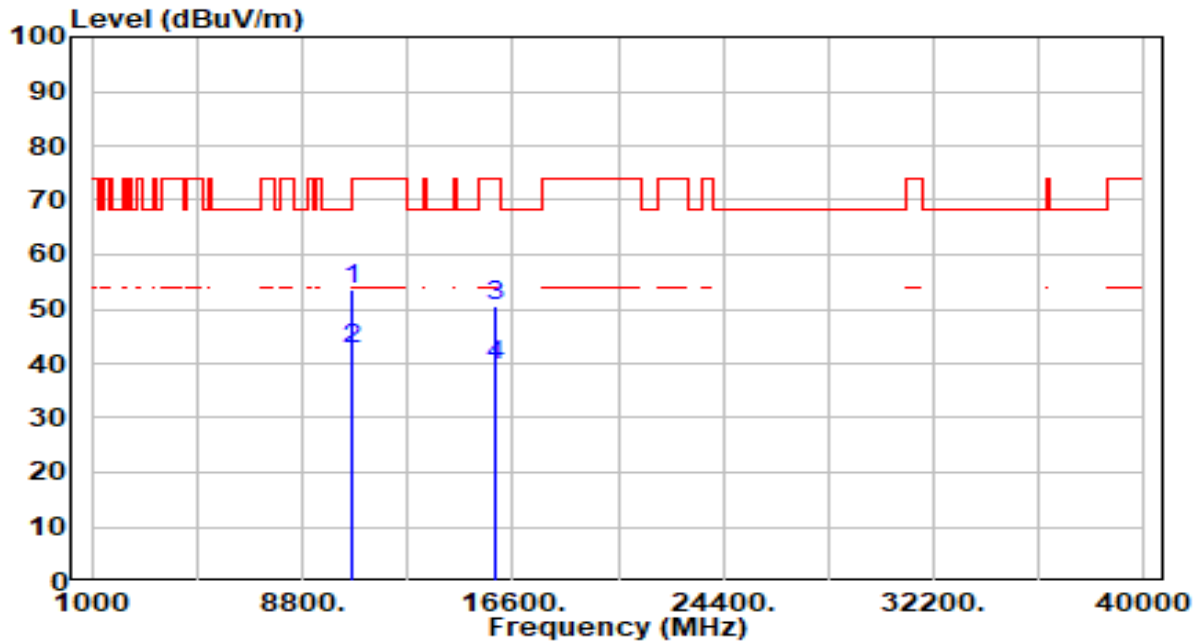


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10640.000	46.98	6.63	53.61	-20.39	74.00	100	193	Peak
2	*	10640.000	35.86	6.63	42.49	-11.51	54.00	100	193	Average
3		15960.000	41.52	9.13	50.65	-23.35	74.00	100	0	Peak
4		15960.000	30.62	9.13	39.75	-14.25	54.00	100	0	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 6+7	Test Voltage	By Notebook PC

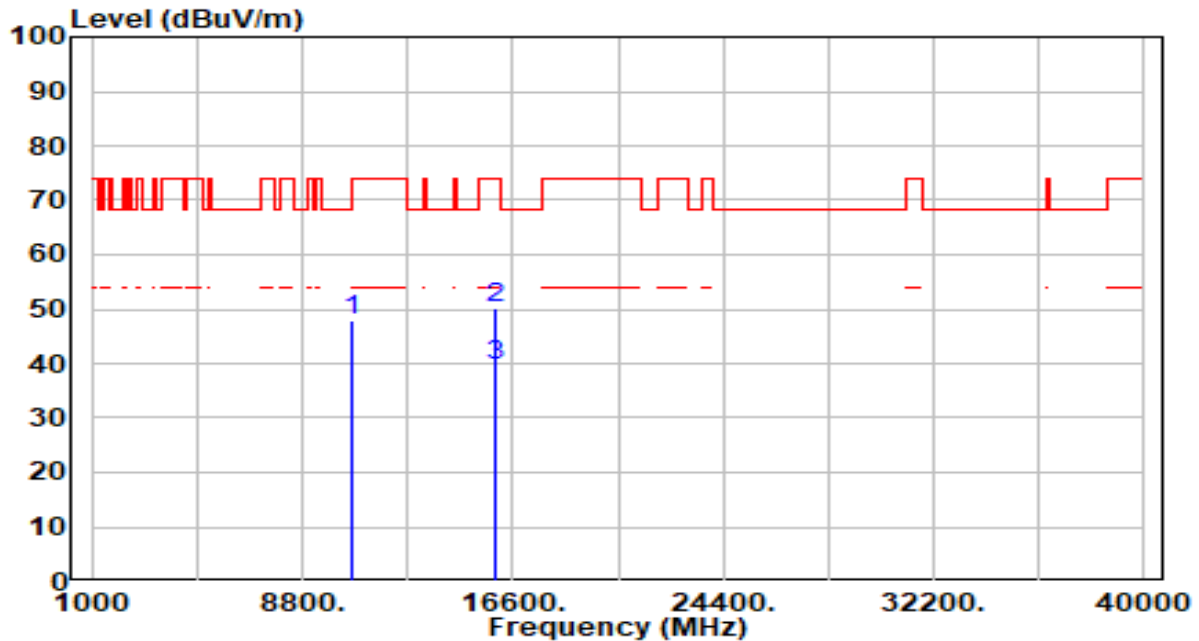


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		10640.000	41.30	6.63	47.93	-26.07	74.00	100	260	Peak
2	*	15960.000	40.98	9.13	50.11	-23.89	74.00	100	85	Peak
3	*	15960.000	30.49	9.13	39.62	-14.38	54.00	100	85	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ANT 6+7	Test Voltage	By Notebook PC

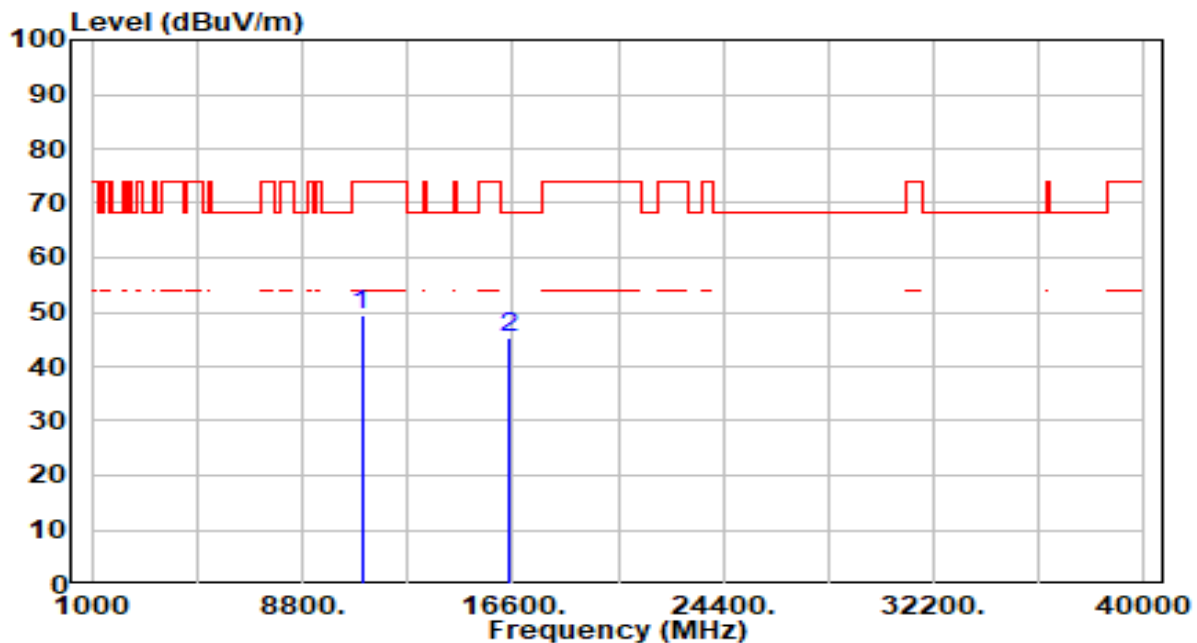


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11000.000	43.00	6.40	49.40	-24.60	74.00	100	188	Peak
2	*	16500.000	36.68	8.74	45.42	-22.78	68.20	100	4	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ANT 6+7	Test Voltage	By Notebook PC

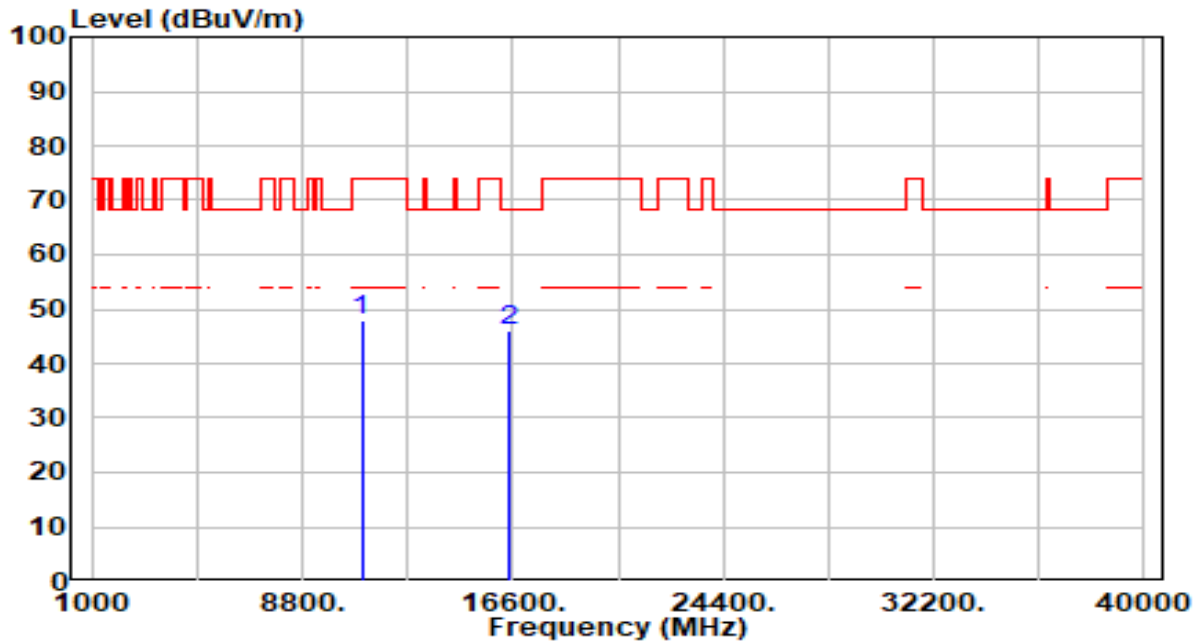


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11000.000	41.56	6.40	47.96	-26.04	74.00	100	358	Peak
2	* 16500.000	37.45	8.74	46.19	-22.01	68.20	100	113	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-20MHz_TX_Band3_CH 116_ANT 6+7	Test Voltage	By Notebook PC

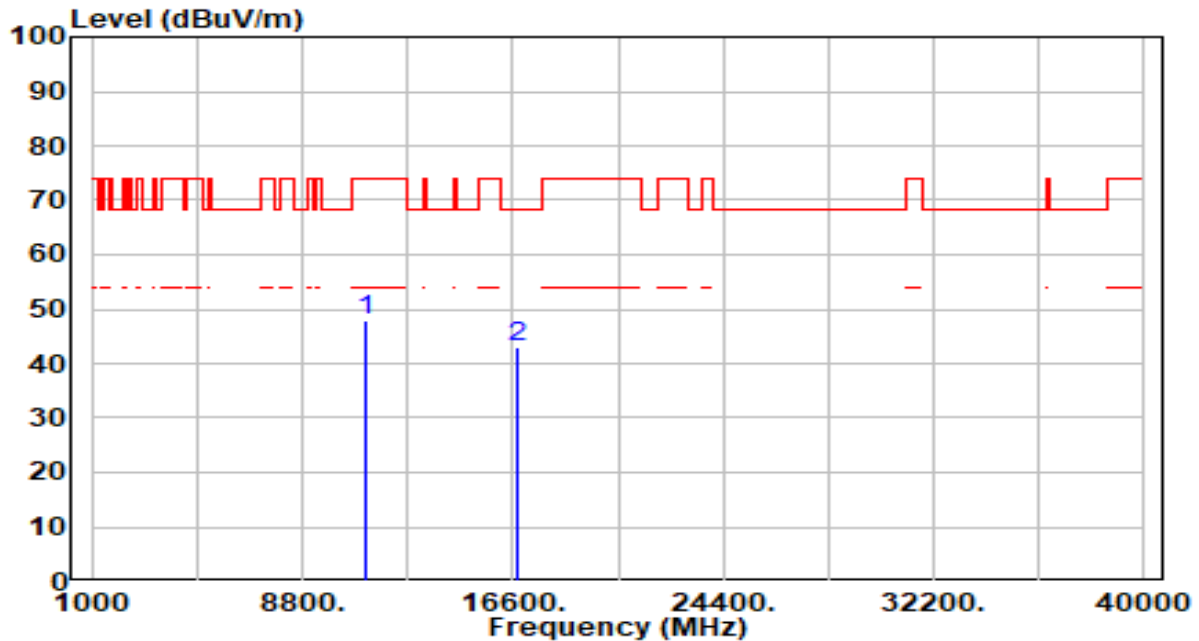


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11160.000	40.96	6.78	47.74	-26.26	74.00	100	0	Peak
2	* 16740.000	34.35	8.71	43.06	-25.14	68.20	100	0	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-20MHz_TX_Band3_CH 116_ANT 6+7	Test Voltage	By Notebook PC

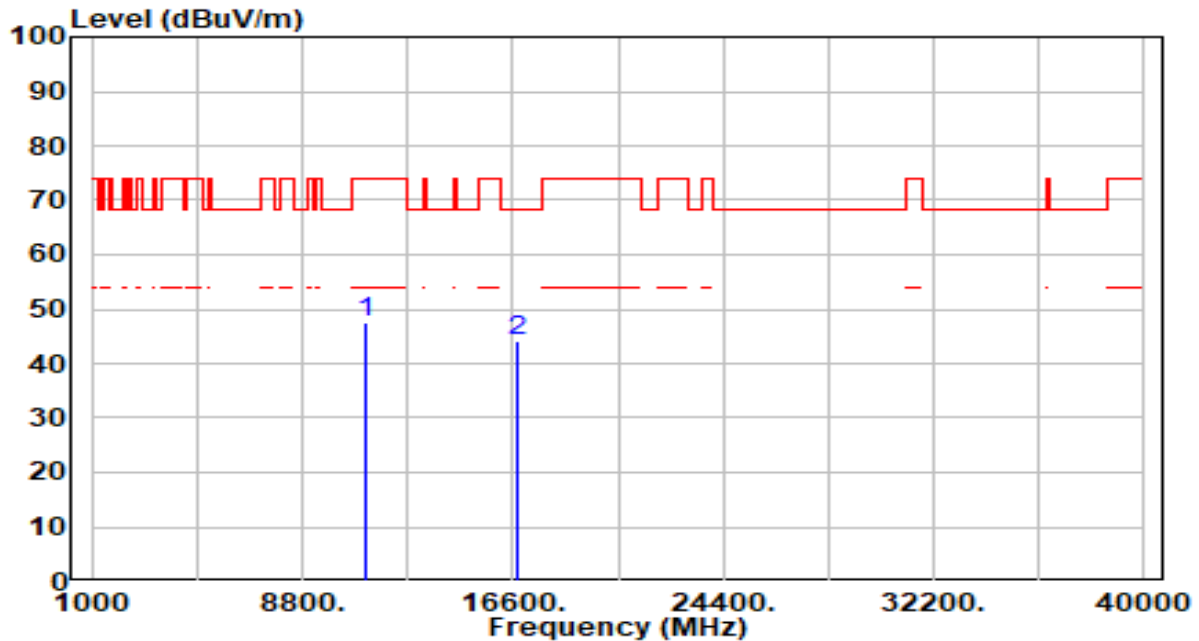


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11160.000	40.72	6.78	47.51	-26.49	74.00	100	229	Peak
2	* 16740.000	35.41	8.71	44.12	-24.08	68.20	100	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-20MHz_TX_Band3_CH 140_ANT 6+7	Test Voltage	By Notebook PC

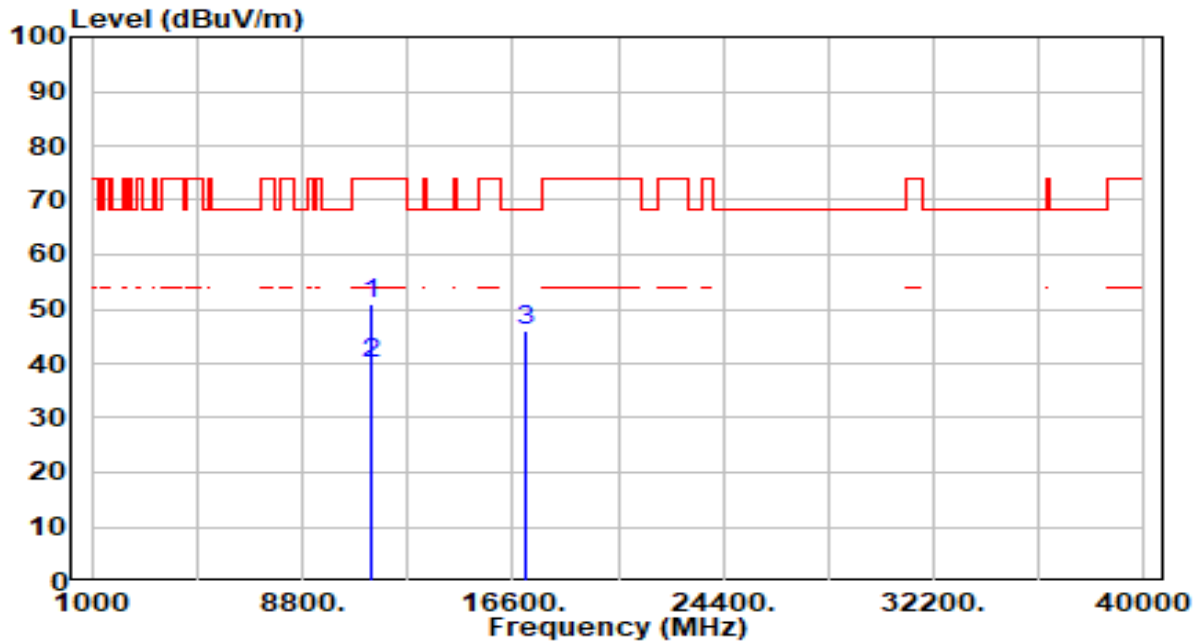


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11400.000	43.74	7.21	50.95	-23.05	74.00	100	124	Peak
2	*	11400.000	32.91	7.21	40.12	-13.88	54.00	100	124	Average
3	*	17100.000	37.89	8.22	46.11	-22.09	68.20	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-20MHz_TX_Band3_CH 140_ANT 6+7	Test Voltage	By Notebook PC

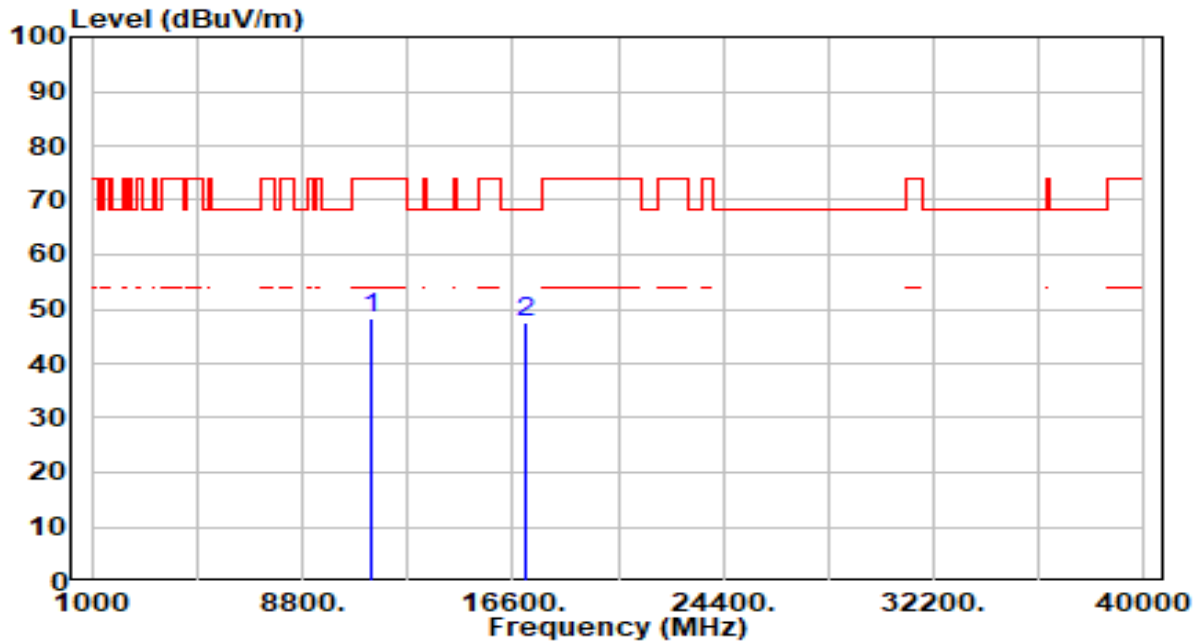


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11400.000	40.99	7.21	48.20	-25.80	74.00	100	174	Peak
2	* 17100.000	39.35	8.22	47.56	-20.64	68.20	100	258	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-20MHz_TX_Band3_CH 144_ANT 6+7	Test Voltage	By Notebook PC

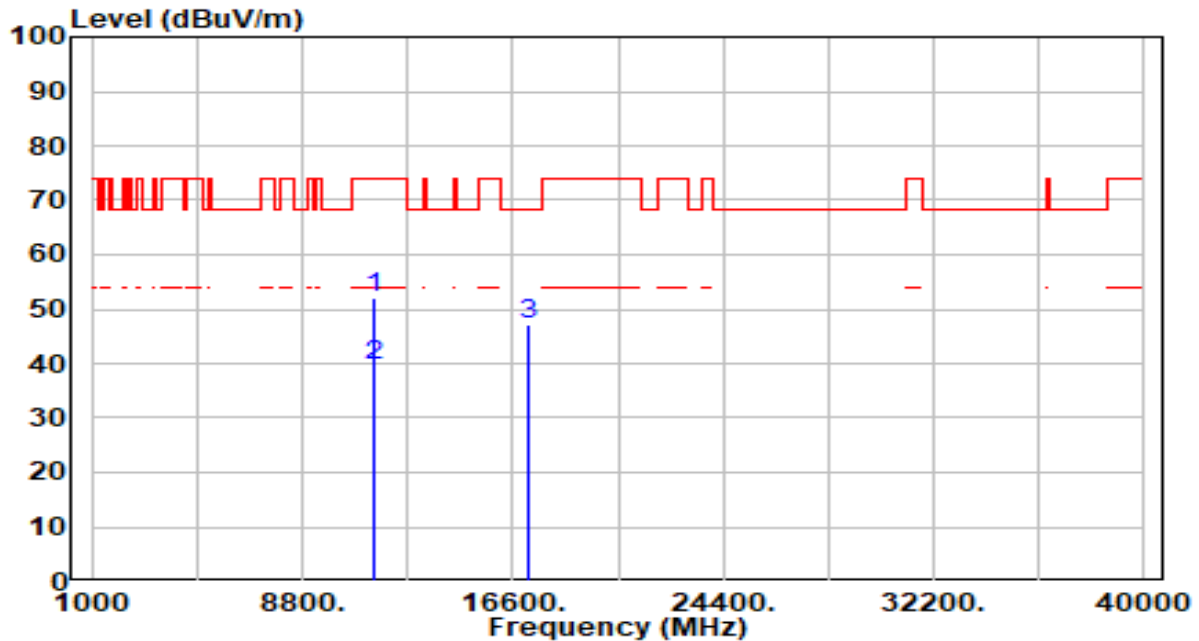


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11440.000	44.69	7.20	51.89	-22.11	74.00	100	196	Peak
2	*	11440.000	32.51	7.20	39.71	-14.29	54.00	100	196	Average
3	*	17160.000	39.11	8.09	47.20	-21.00	68.20	100	77	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-20MHz_TX_Band3_CH 144_ANT 6+7	Test Voltage	By Notebook PC

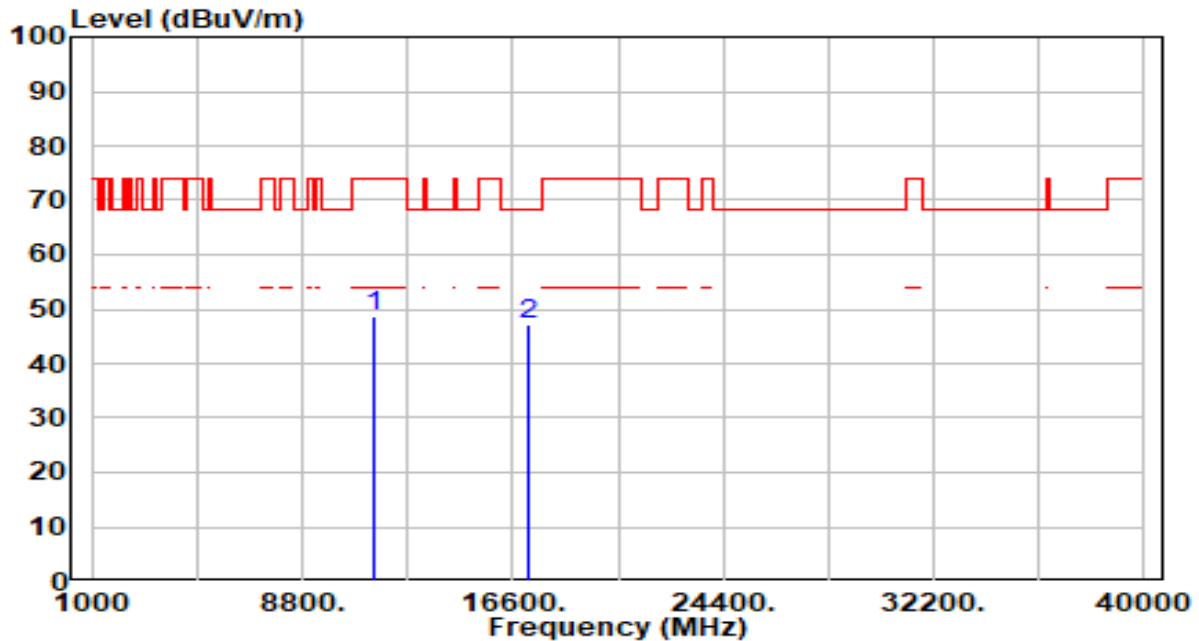


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11440.000	41.40	7.20	48.60	-25.40	74.00	100	359	Peak
2	* 17160.000	39.16	8.09	47.25	-20.95	68.20	100	290	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-20MHz_TX_Band4_CH 149_ANT 6+7	Test Voltage	By Notebook PC

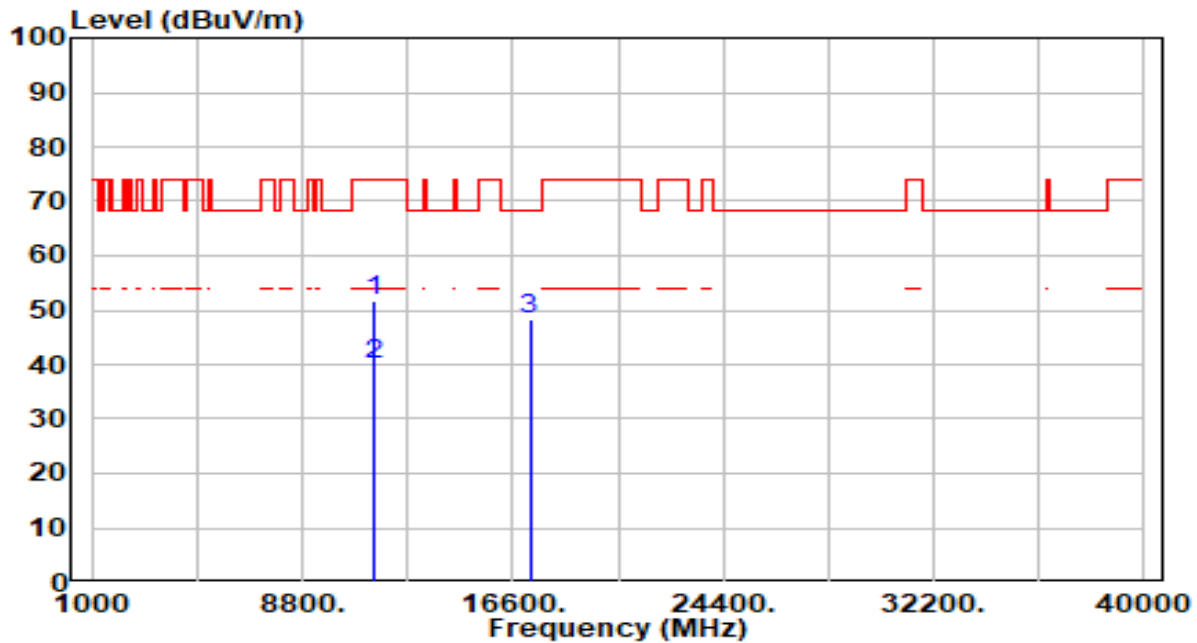


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11490.000	44.68	7.19	51.87	-22.13	74.00	100	108	Peak
2	*	11490.000	32.91	7.19	40.10	-13.90	54.00	100	108	Average
3	*	17235.000	40.58	7.87	48.46	-19.74	68.20	100	123	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-20MHz_TX_Band4_CH 149_ANT 6+7	Test Voltage	By Notebook PC

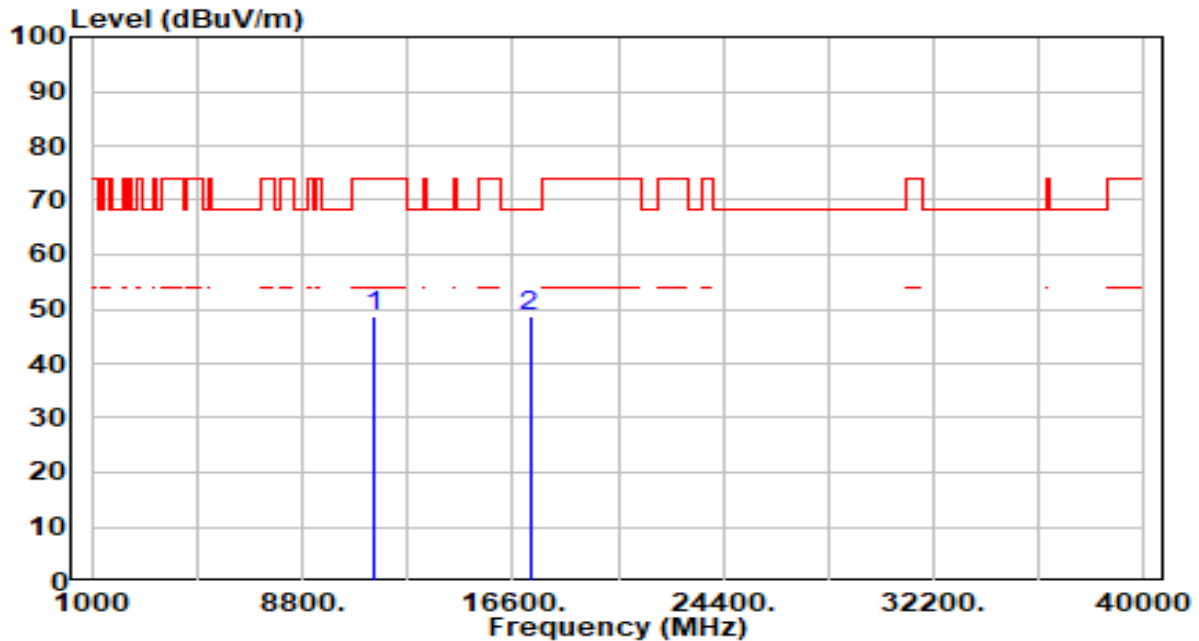


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11490.000	41.33	7.19	48.52	-25.48	74.00	100	360	Peak
2	* 17235.000	40.91	7.87	48.78	-19.42	68.20	100	81	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-20MHz_TX_Band4_CH 157_ANT 6+7	Test Voltage	By Notebook PC

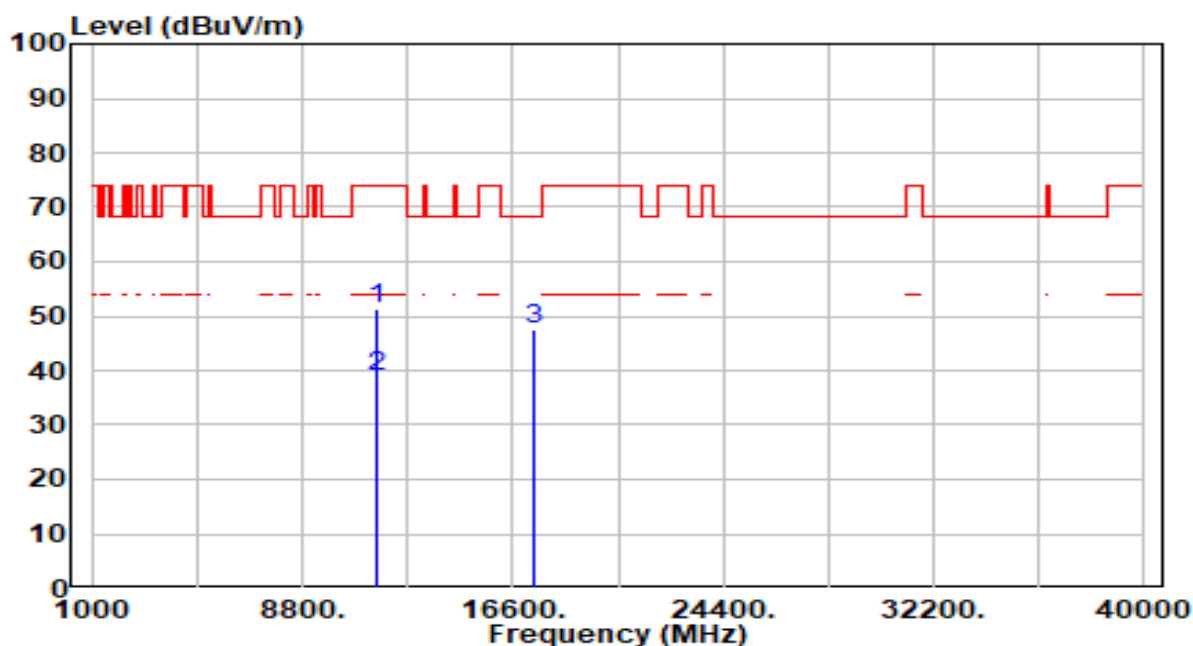


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11570.000	43.93	7.22	51.15	-22.85	74.00	100	188	Peak
2	*	11570.000	31.72	7.22	38.94	-15.06	54.00	100	188	Average
3	*	17355.000	40.18	7.35	47.53	-20.67	68.20	100	63	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-20MHz_TX_Band4_CH 157_ANT 6+7	Test Voltage	By Notebook PC

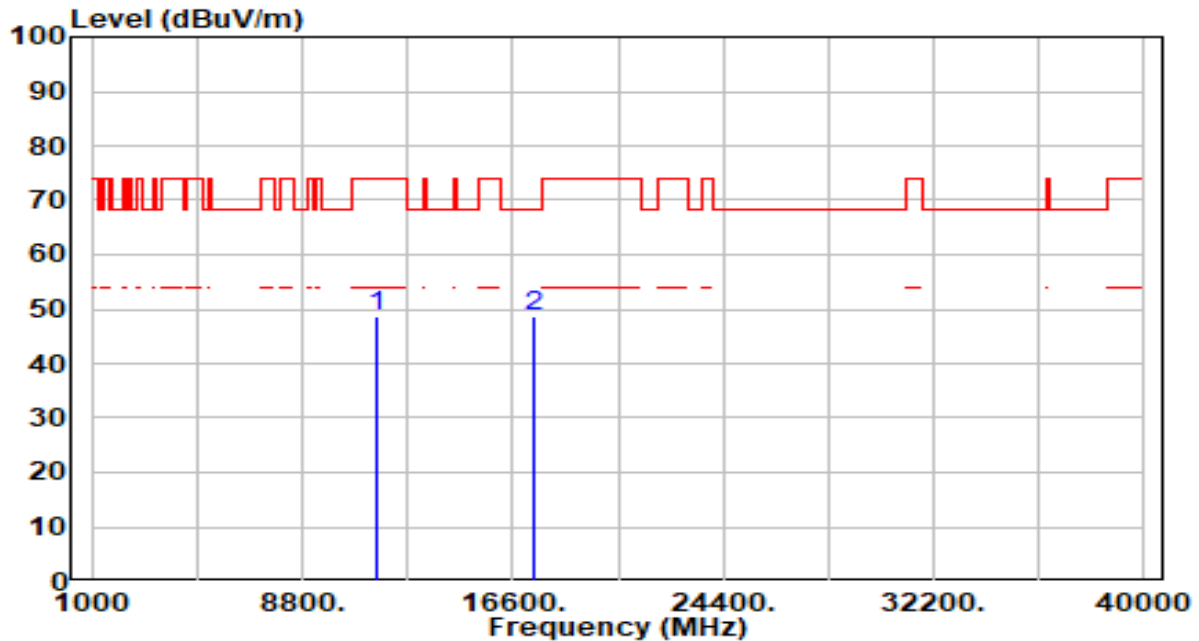


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11570.000	41.41	7.22	48.63	-25.37	74.00	100	360	Peak
2	* 17355.000	41.16	7.35	48.51	-19.69	68.20	100	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-20MHz_TX_Band4_CH 165_ANT 6+7	Test Voltage	By Notebook PC

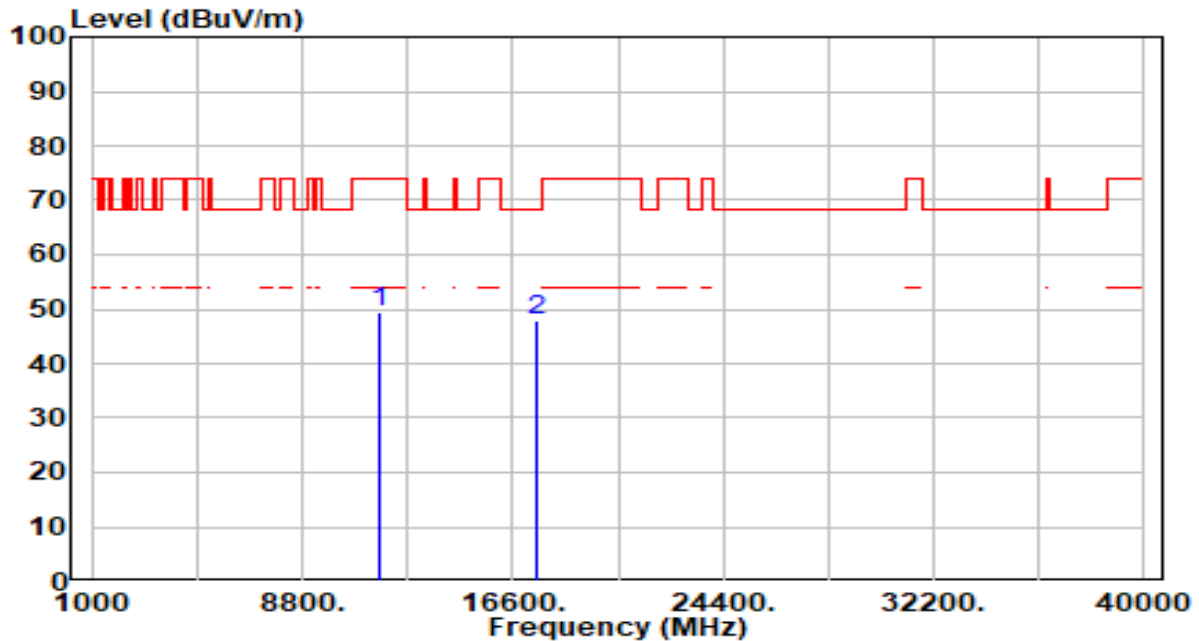


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11650.000	42.34	7.22	49.56	-24.44	74.00	100	159	Peak
2	* 17475.000	40.40	7.41	47.81	-20.39	68.20	100	209	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-20MHz_TX_Band4_CH 165_ANT 6+7	Test Voltage	By Notebook PC

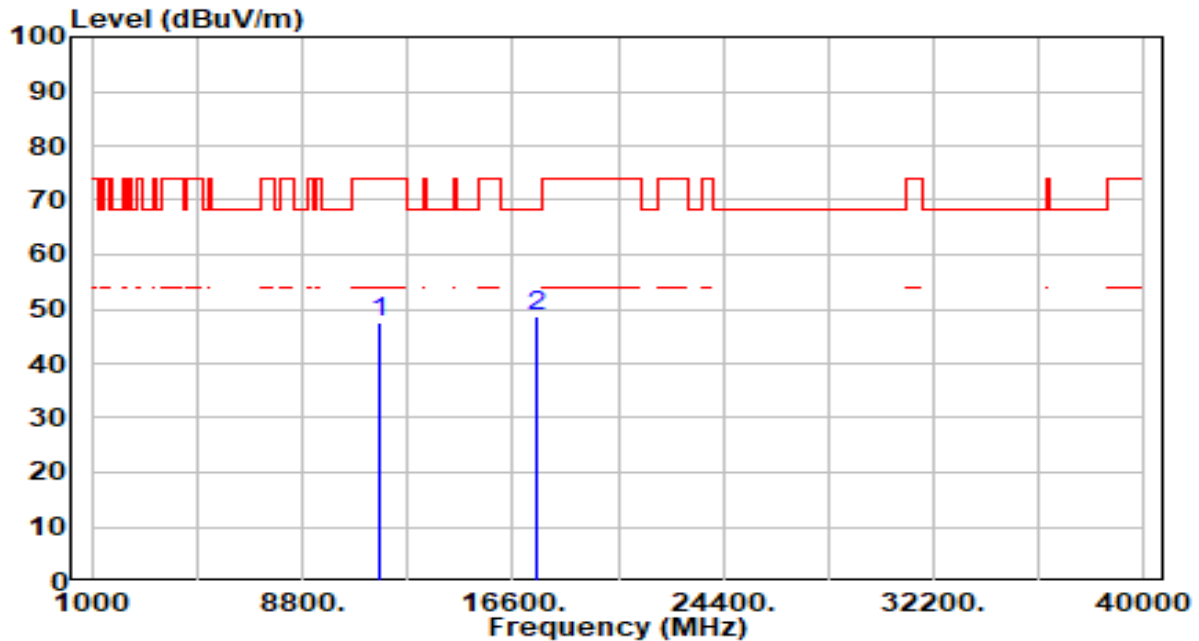


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11650.000	40.32	7.22	47.54	-26.46	74.00	100	235	Peak
2	* 17475.000	41.19	7.41	48.61	-19.59	68.20	100	57	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 6+7	Test Voltage	By Notebook PC

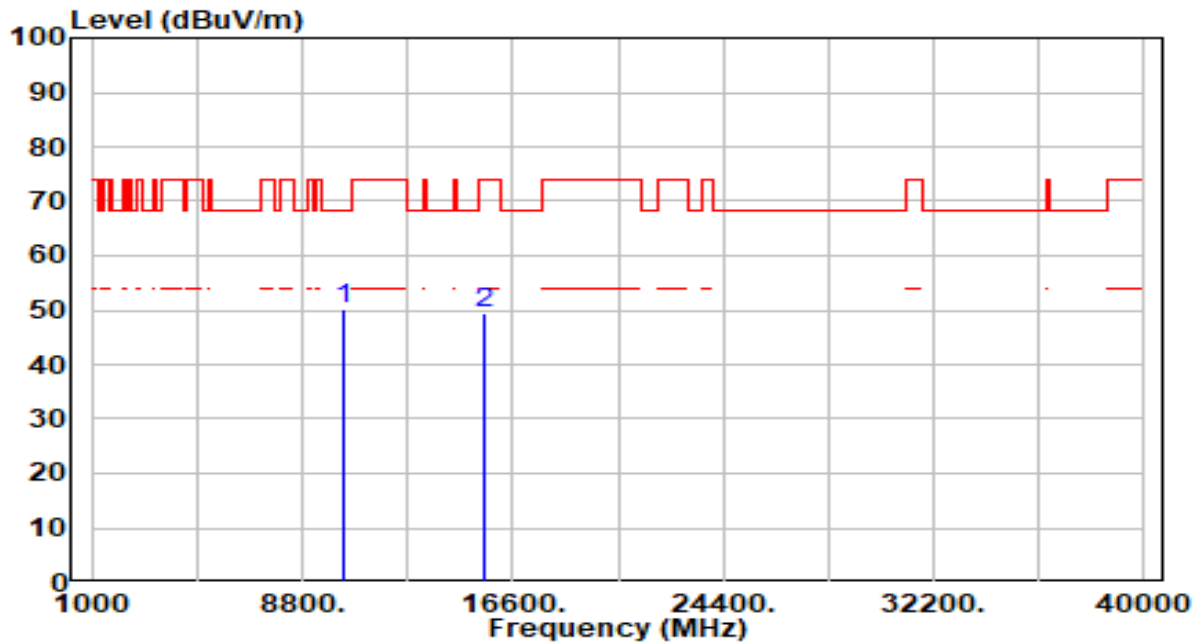


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10380.000	43.31	6.83	50.14	-18.06	68.20	100	182	Peak
2		15570.000	40.74	8.66	49.40	-24.60	74.00	100	46	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 6+7	Test Voltage	By Notebook PC

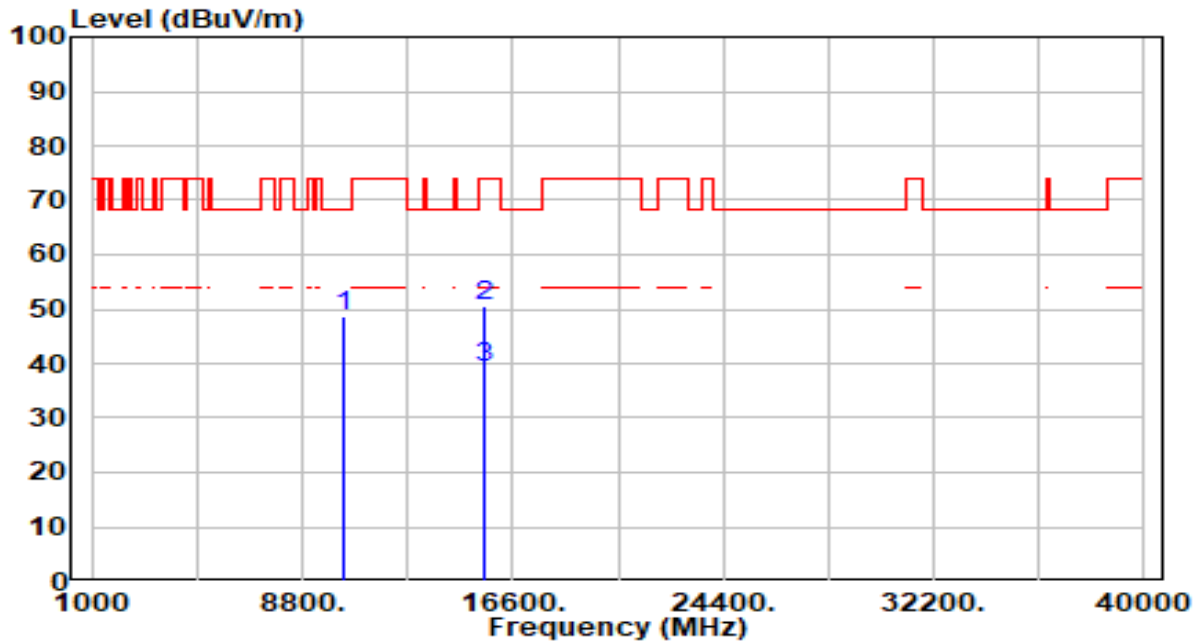


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10380.000	41.77	6.83	48.60	-19.60	68.20	100	292	Peak
2		15570.000	41.94	8.66	50.59	-23.41	74.00	100	43	Peak
3	*	15570.000	30.72	8.66	39.38	-14.62	54.00	100	43	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-40MHz_TX_Band1_CH 46_ANT 6+7	Test Voltage	By Notebook PC

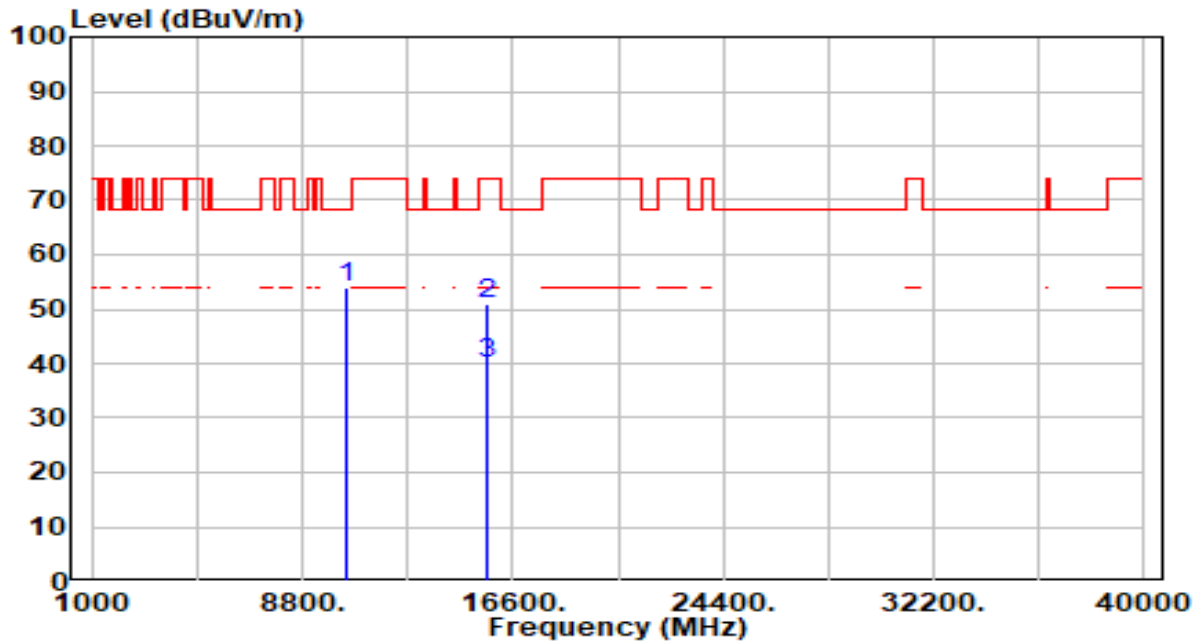


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10460.000	47.36	6.76	54.11	-14.09	68.20	100	264	Peak
2		15690.000	42.15	8.84	50.99	-23.01	74.00	100	267	Peak
3	*	15690.000	31.33	8.84	40.17	-13.83	54.00	100	267	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-40MHz_TX_Band1_CH 46_ANT 6+7	Test Voltage	By Notebook PC

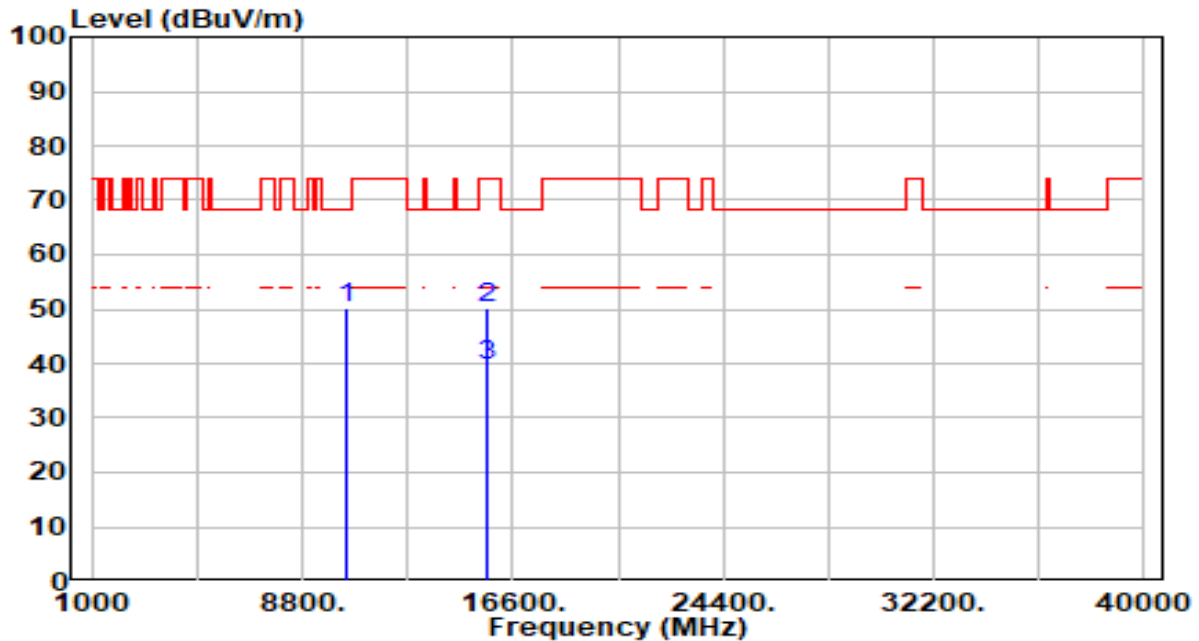


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10460.000	43.52	6.76	50.28	-17.92	68.20	100	326	Peak
2		15690.000	41.28	8.84	50.12	-23.88	74.00	100	239	Peak
3	*	15690.000	30.81	8.84	39.65	-14.35	54.00	100	239	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-40MHz_TX_Band2_CH 54_ANT 6+7	Test Voltage	By Notebook PC

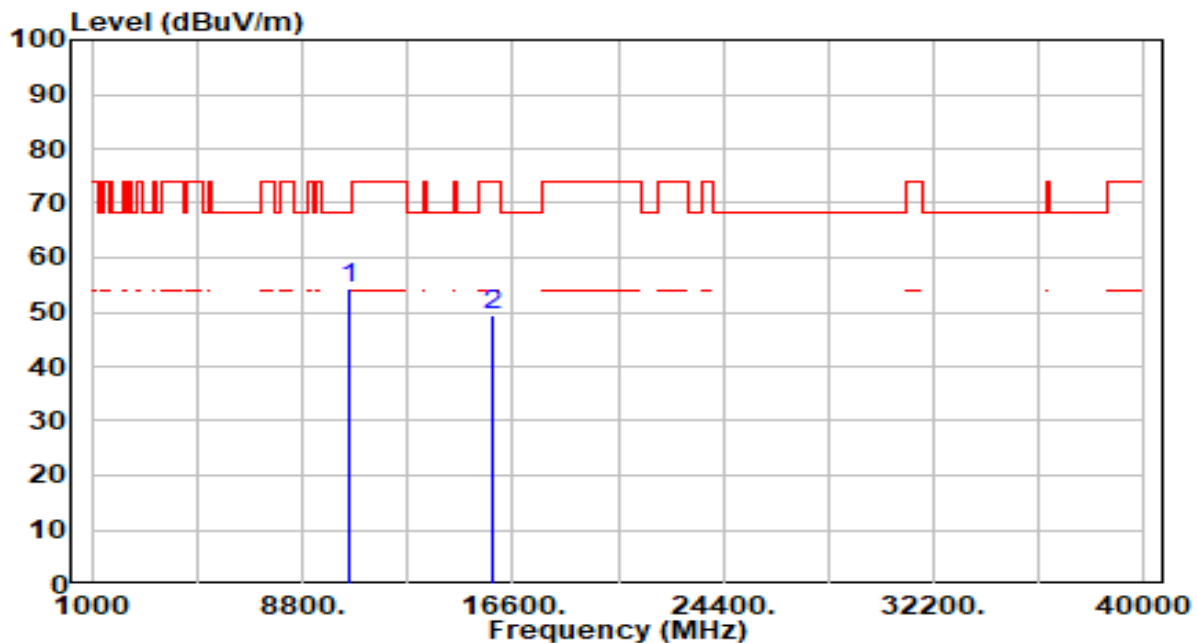


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10540.000	47.82	6.68	54.50	-13.70	68.20	100	202	Peak
2		15810.000	40.55	9.05	49.60	-24.40	74.00	100	243	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-40MHz_TX_Band2_CH 54_ANT 6+7	Test Voltage	By Notebook PC

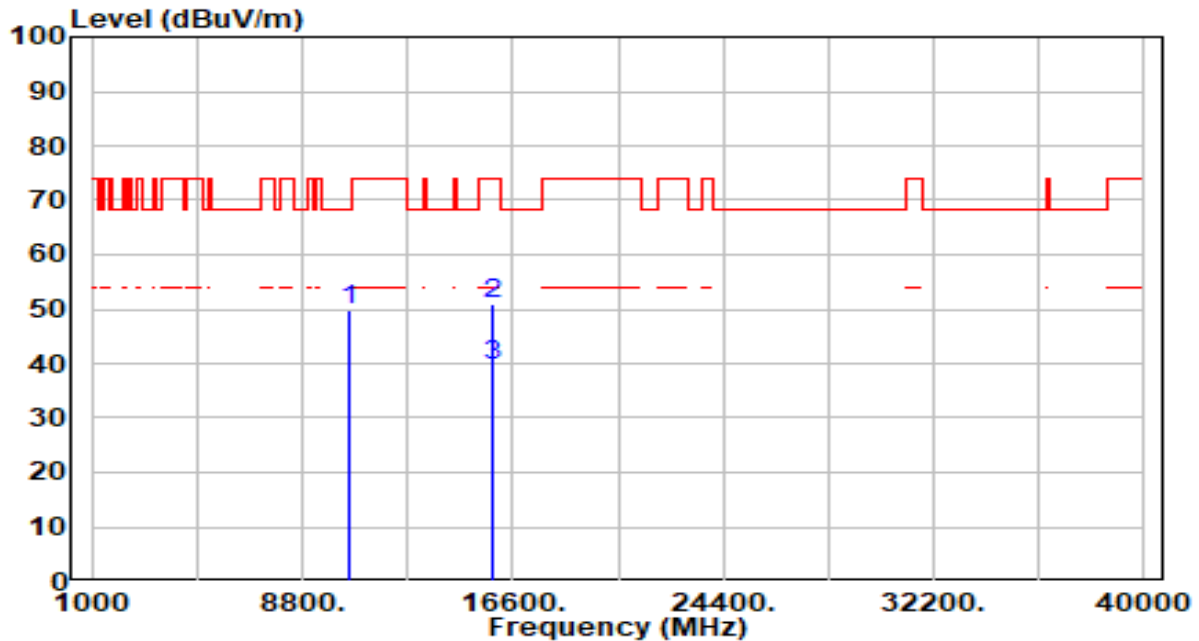


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10540.000	43.07	6.68	49.74	-18.46	68.20	100	360	Peak
2		15810.000	42.08	9.05	51.13	-22.87	74.00	100	360	Peak
3	*	15810.000	30.63	9.05	39.68	-14.32	54.00	100	360	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 6+7	Test Voltage	By Notebook PC

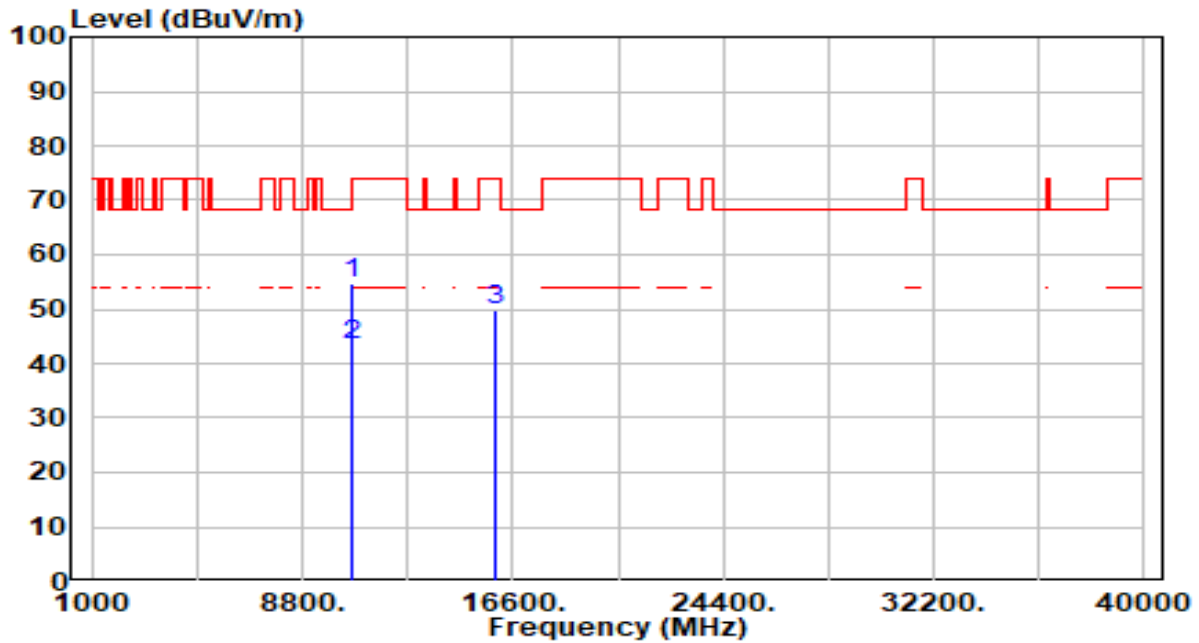


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10620.000	48.00	6.62	54.62	-19.38	74.00	100	221	Peak
2	*	10620.000	36.67	6.62	43.29	-10.71	54.00	100	221	Average
3		15930.000	40.63	9.14	49.77	-24.23	74.00	100	53	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 6+7	Test Voltage	By Notebook PC

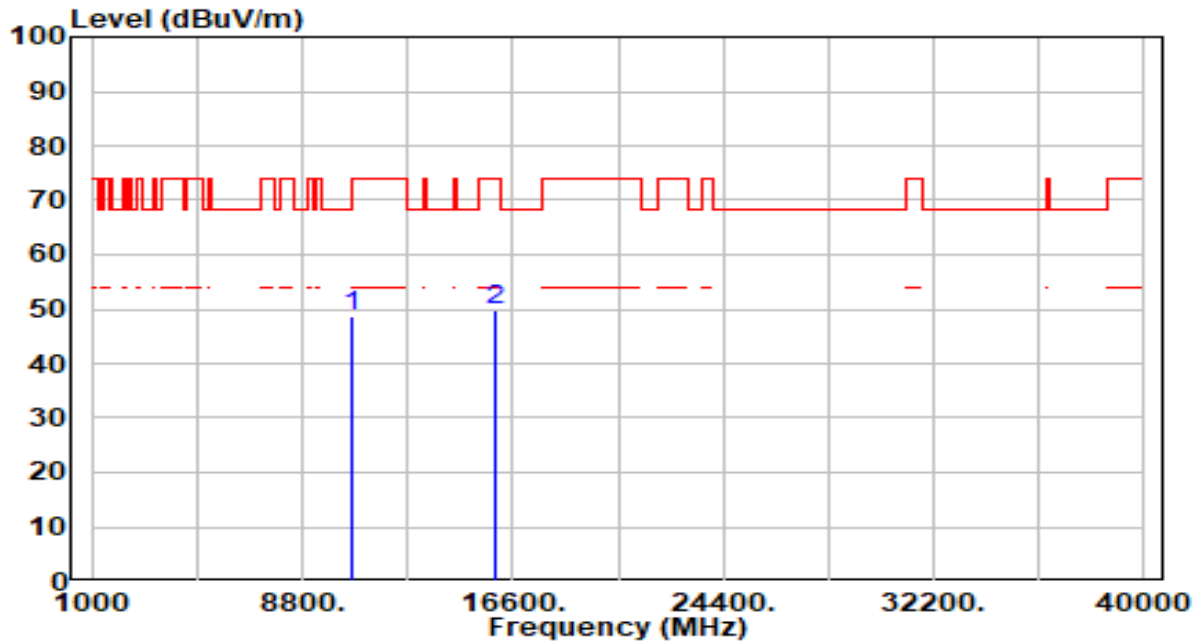


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10620.000	42.11	6.62	48.73	-25.27	74.00	100	282	Peak
2	* 15930.000	40.60	9.14	49.75	-24.25	74.00	100	359	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-40MHz_TX_Band3_CH 102_ANT 6+7	Test Voltage	By Notebook PC

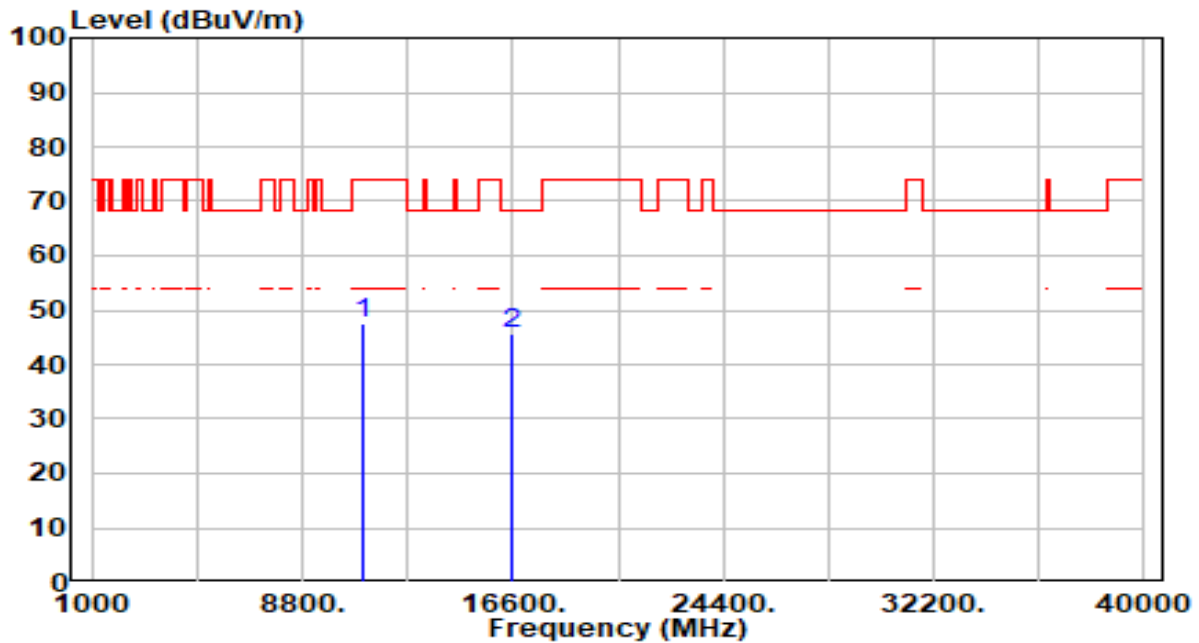


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11020.000	41.21	6.45	47.66	-26.34	74.00	100	275	Peak
2	* 16530.000	37.05	8.72	45.77	-22.43	68.20	100	203	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-40MHz_TX_Band3_CH 102_ANT 6+7	Test Voltage	By Notebook PC

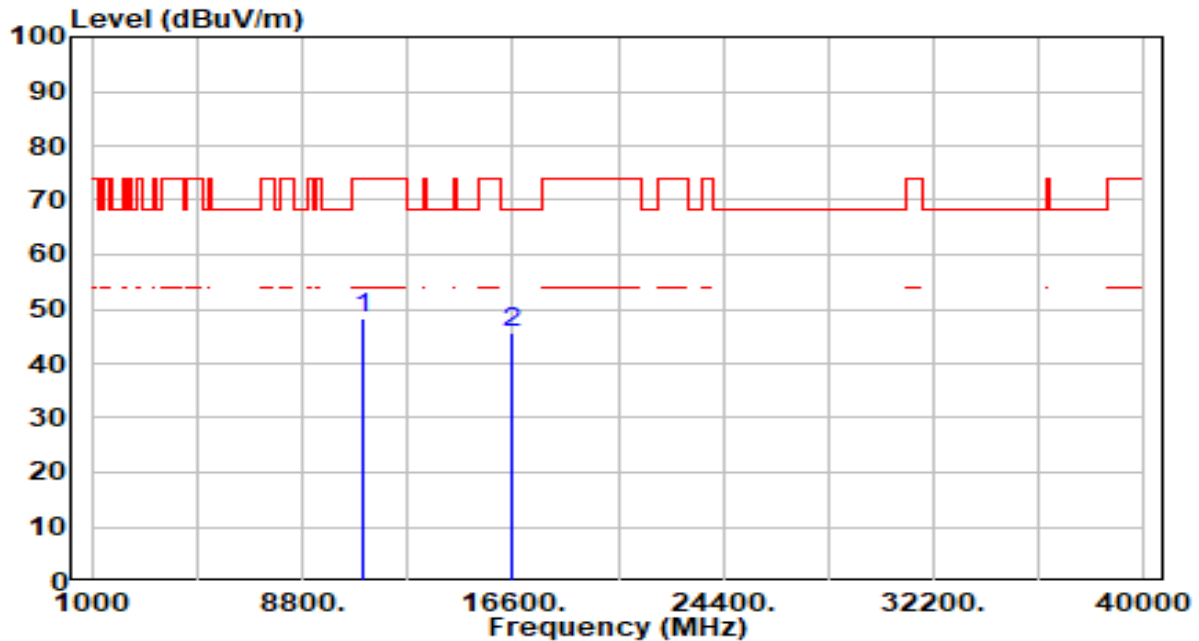


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11020.000	42.02	6.45	48.47	-25.53	74.00	100	209	Peak
2	* 16530.000	36.85	8.72	45.57	-22.63	68.20	100	197	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-40MHz_TX_Band3_CH 110_ANT 6+7	Test Voltage	By Notebook PC

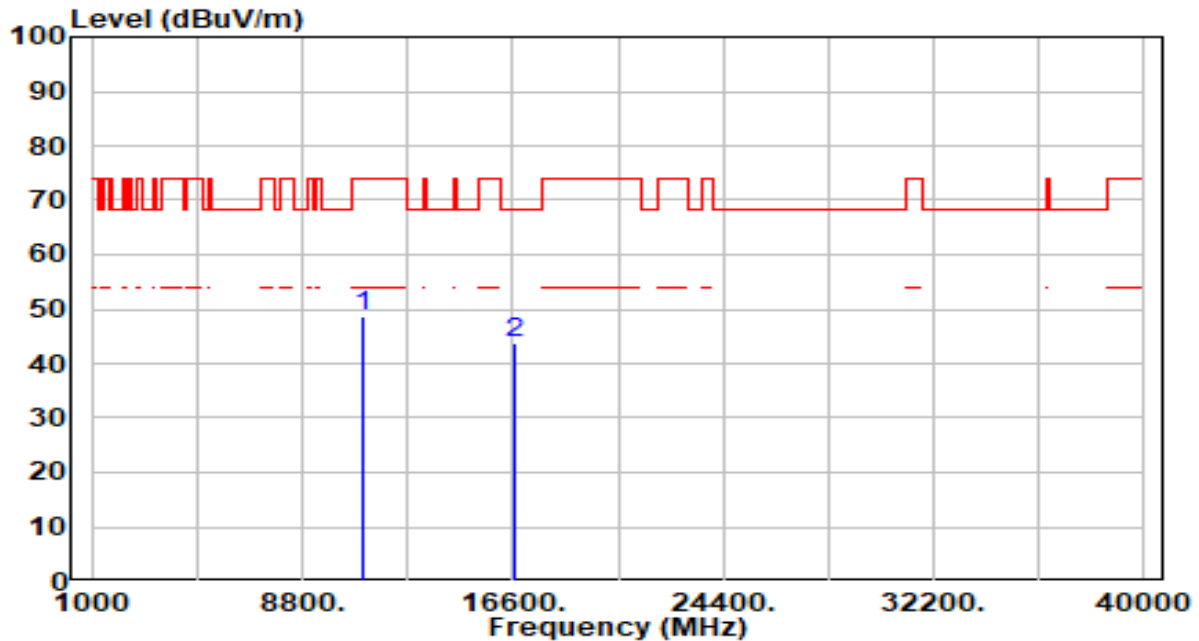


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11100.000	42.07	6.63	48.70	-25.30	74.00	100	273	Peak
2	* 16650.000	34.98	8.69	43.67	-24.53	68.20	100	345	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-40MHz_TX_Band3_CH 110_ANT 6+7	Test Voltage	By Notebook PC

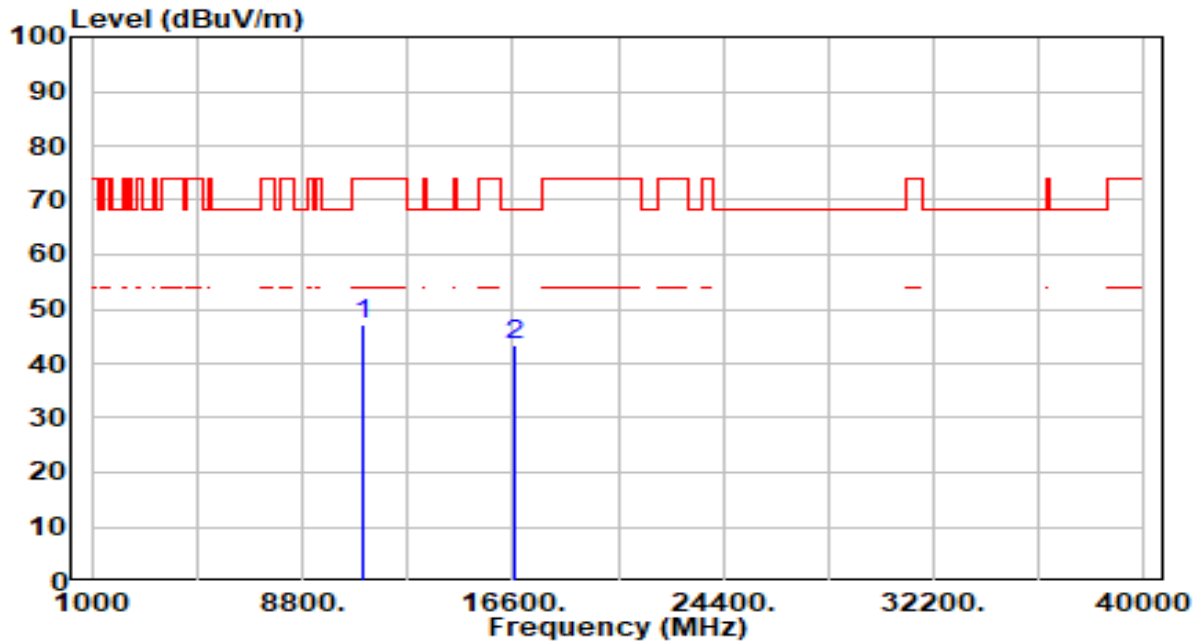


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11100.000	40.69	6.63	47.31	-26.69	74.00	100	156	Peak
2	*	16650.000	34.88	8.69	43.56	-24.64	68.20	100	226	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-40MHz_TX_Band3_CH 134_ANT 6+7	Test Voltage	By Notebook PC

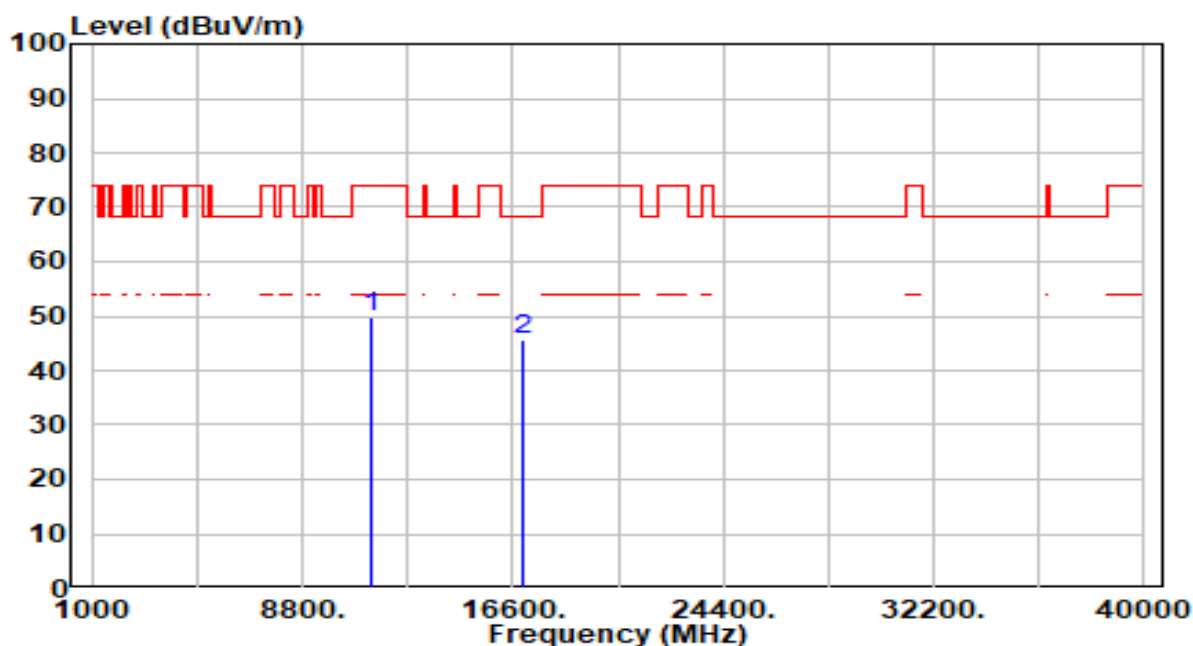


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11340.000	42.77	7.13	49.90	-24.10	74.00	100	227	Peak
2	* 17010.000	37.22	8.44	45.65	-22.55	68.20	100	136	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-40MHz_TX_Band3_CH 134_ANT 6+7	Test Voltage	By Notebook PC

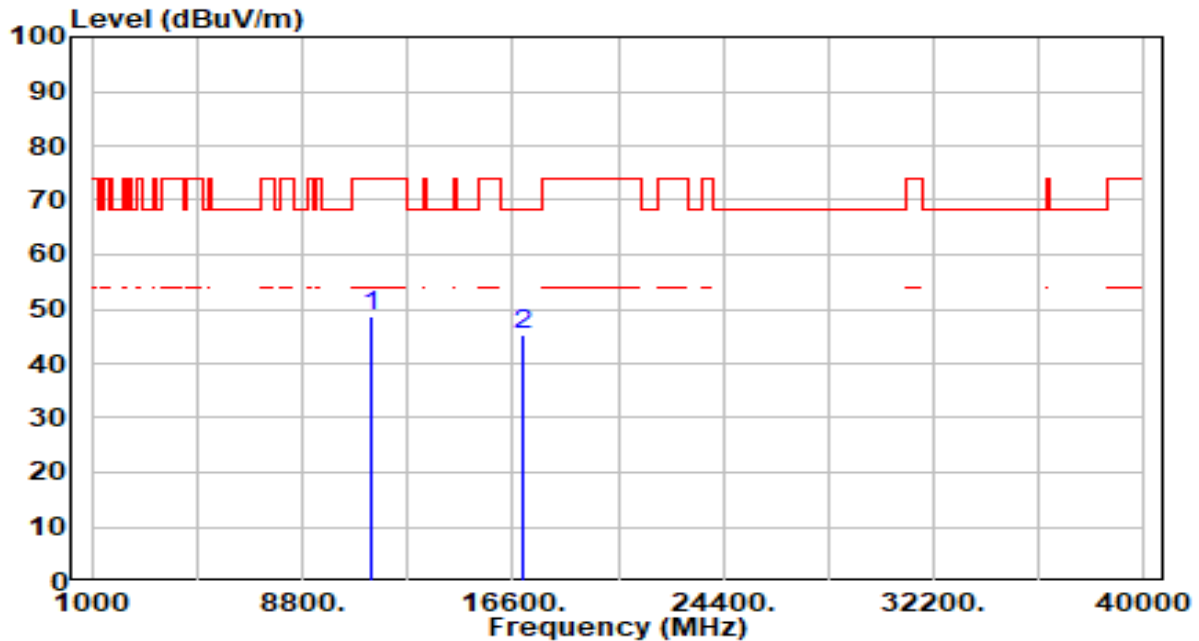


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11340.000	41.63	7.13	48.76	-25.24	74.00	100	4	Peak
2	* 17010.000	36.76	8.44	45.19	-23.01	68.20	100	327	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-40MHz_TX_Band3_CH 142_ANT 6+7	Test Voltage	By Notebook PC

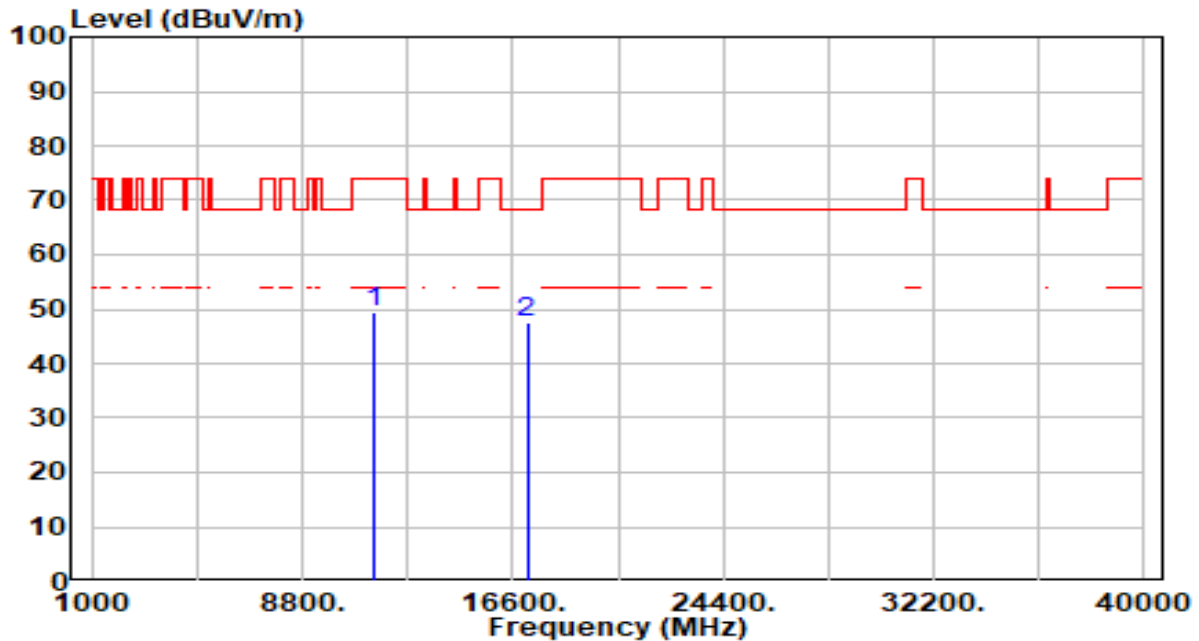


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11420.000	42.20	7.21	49.41	-24.59	74.00	100	220	Peak
2	* 17130.000	39.25	8.15	47.40	-20.80	68.20	100	186	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-40MHz_TX_Band3_CH 142_ANT 6+7	Test Voltage	By Notebook PC

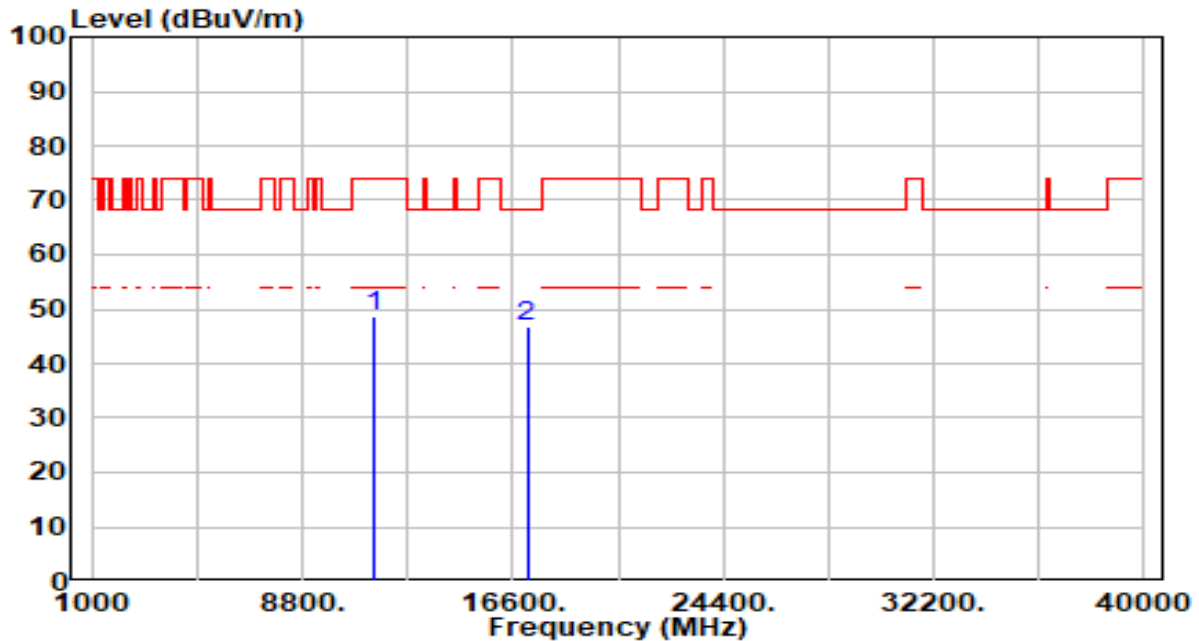


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11420.000	41.33	7.21	48.54	-25.46	74.00	100	216	Peak
2	* 17130.000	38.71	8.15	46.86	-21.34	68.20	100	359	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-40MHz_TX_Band4_CH 151_ANT 6+7	Test Voltage	By Notebook PC

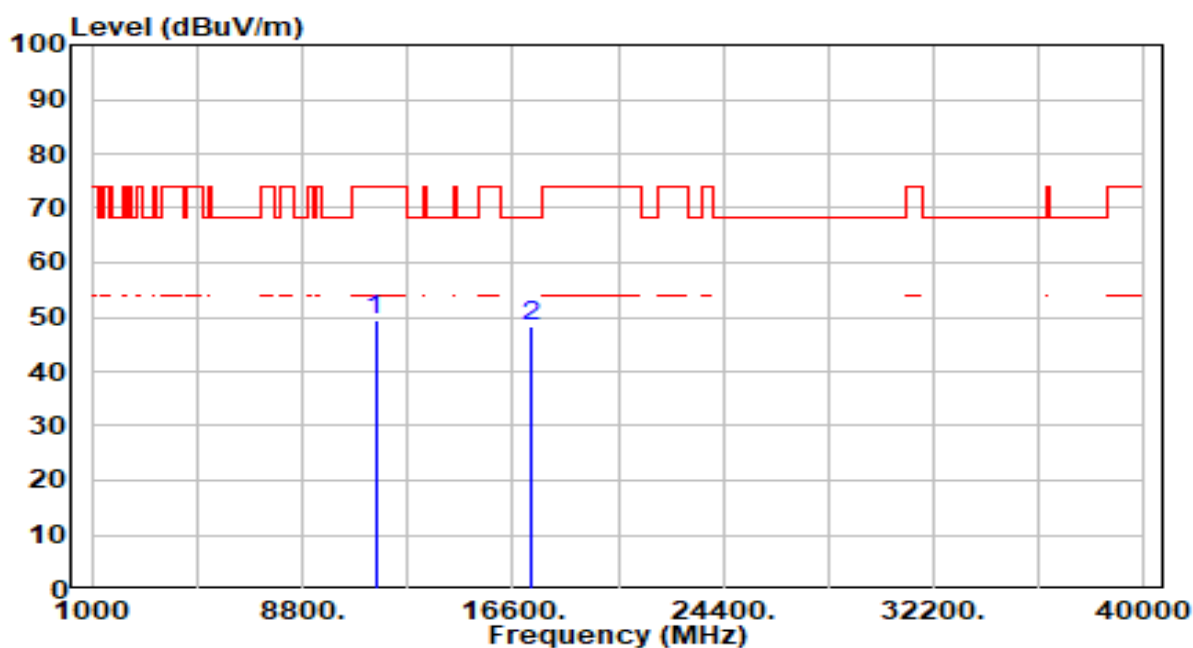


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11510.000	42.18	7.19	49.37	-24.63	74.00	100	130	Peak
2	*	17265.000	40.47	7.76	48.23	-19.97	68.20	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-40MHz_TX_Band4_CH 151_ANT 6+7	Test Voltage	By Notebook PC

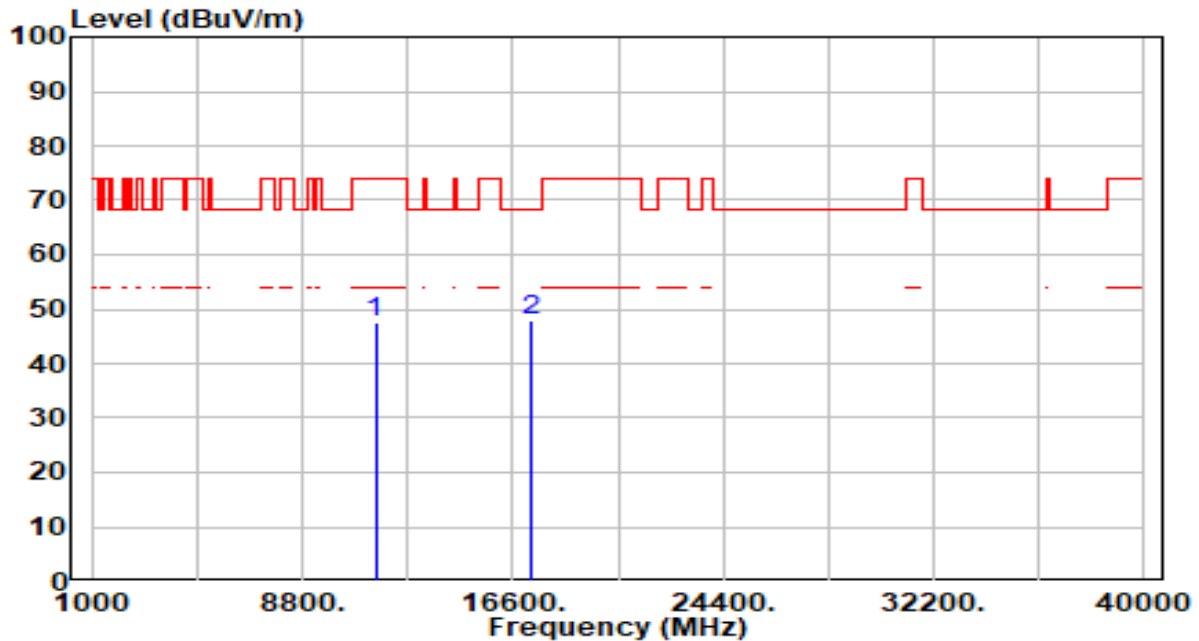


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11510.000	40.49	7.19	47.68	-26.32	74.00	100	314	Peak
2	* 17265.000	40.10	7.76	47.86	-20.34	68.20	100	191	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-40MHz_TX_Band4_CH 159_ANT 6+7	Test Voltage	By Notebook PC

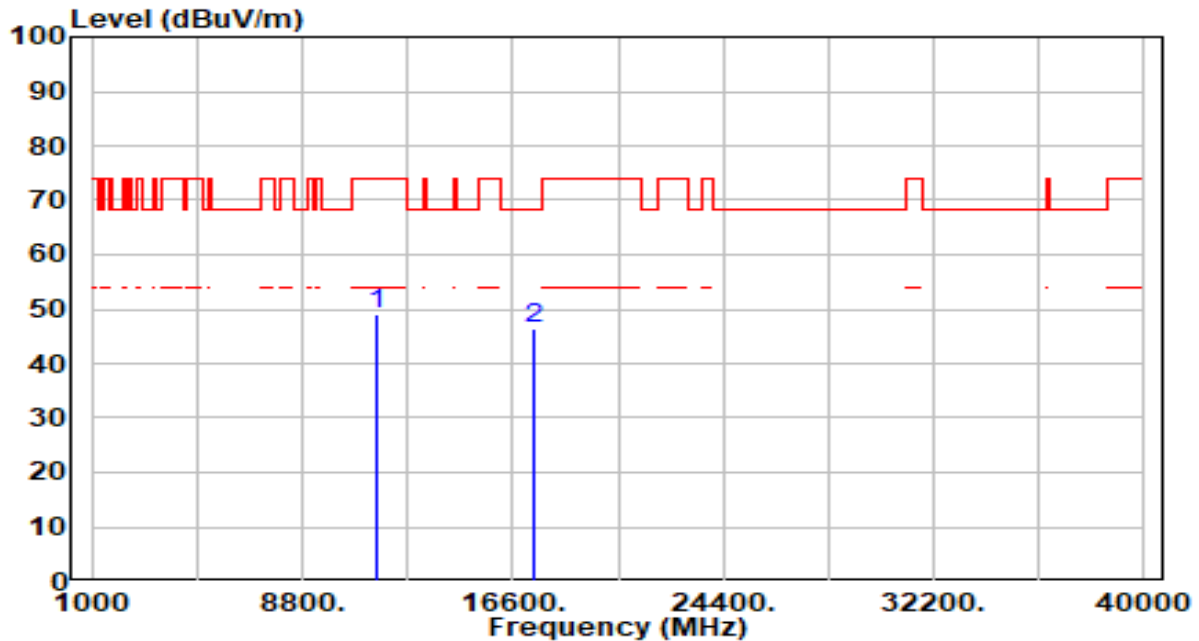


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11590.000	42.00	7.23	49.22	-24.78	74.00	100	102	Peak
2	* 17385.000	39.39	7.20	46.58	-21.62	68.20	100	52	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-40MHz_TX_Band4_CH 159_ANT 6+7	Test Voltage	By Notebook PC

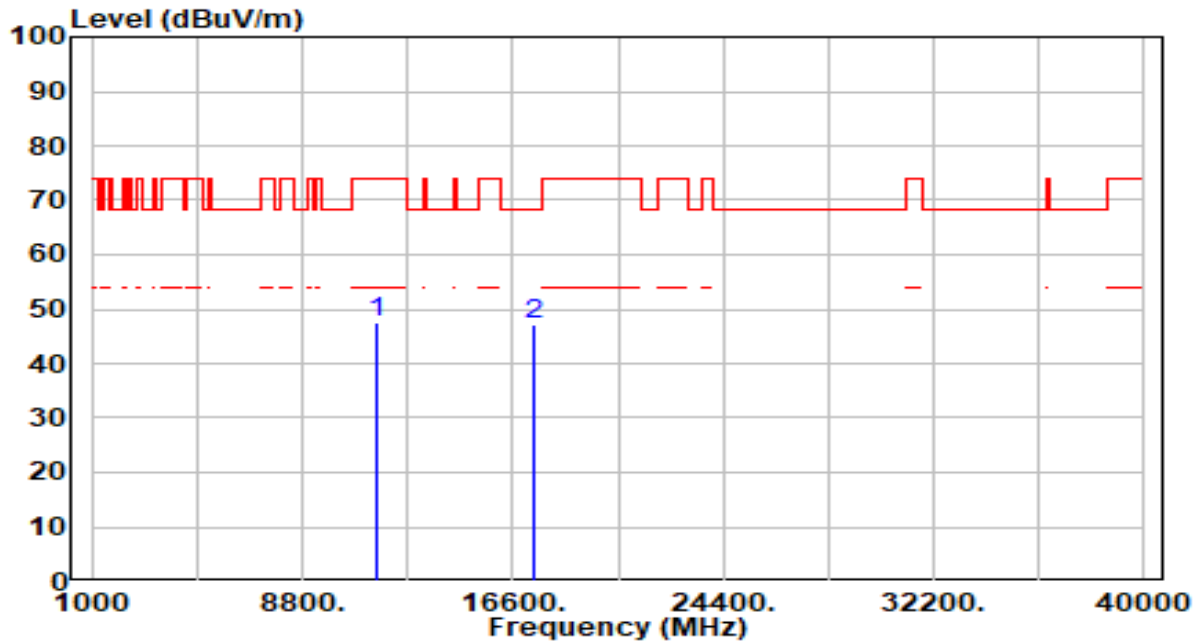


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11590.000	40.37	7.23	47.60	-26.40	74.00	100	360	Peak
2	* 17385.000	40.13	7.20	47.32	-20.88	68.20	100	325	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 6+7	Test Voltage	By Notebook PC

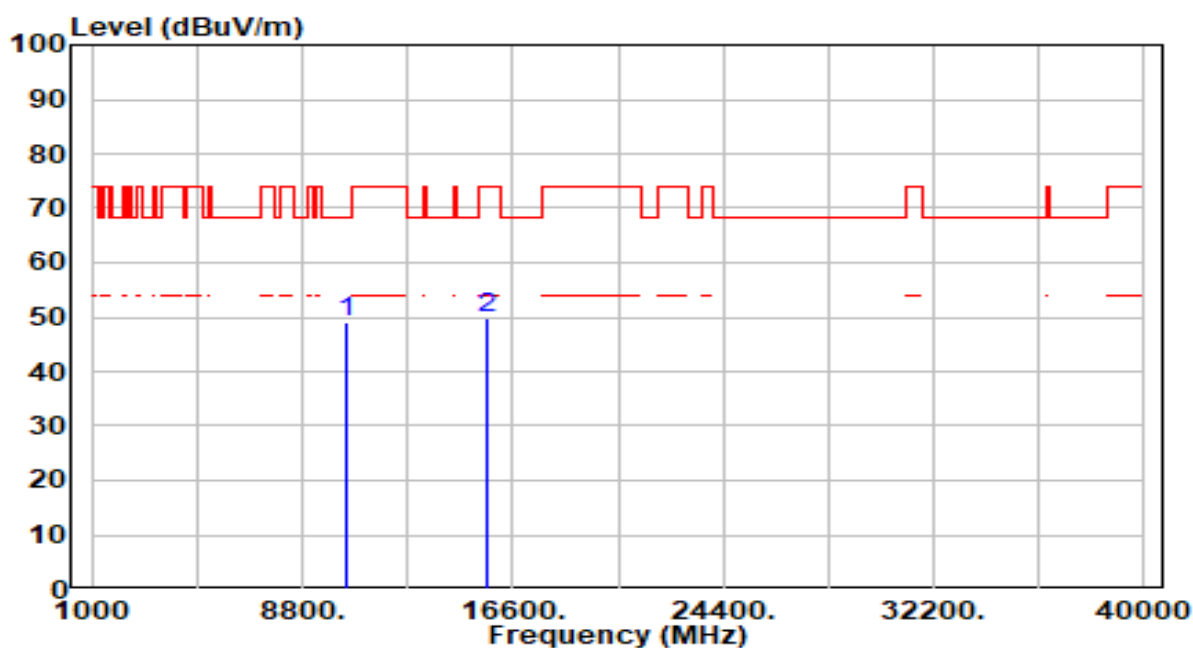


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10420.000	42.35	6.80	49.15	-19.05	68.20	100	187	Peak
2		15630.000	41.17	8.69	49.86	-24.14	74.00	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 6+7	Test Voltage	By Notebook PC

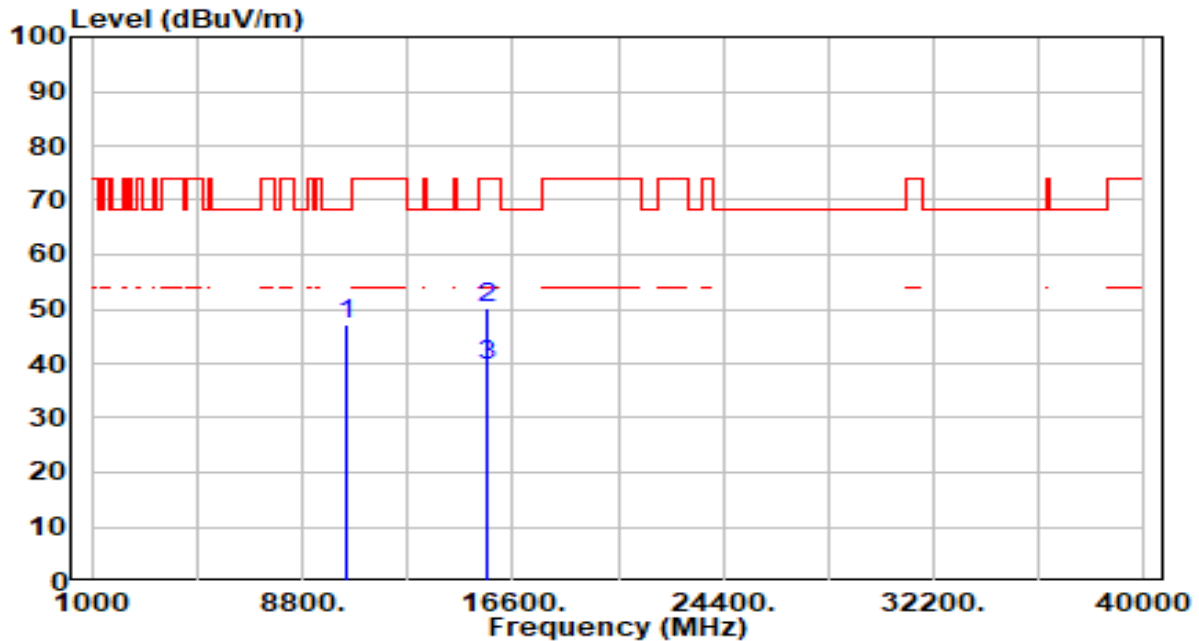


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10420.000	40.43	6.80	47.22	-20.98	68.20	100	250	Peak
2		15630.000	41.45	8.69	50.14	-23.86	74.00	100	115	Peak
3	*	15630.000	30.92	8.69	39.61	-14.39	54.00	100	115	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 6+7	Test Voltage	By Notebook PC

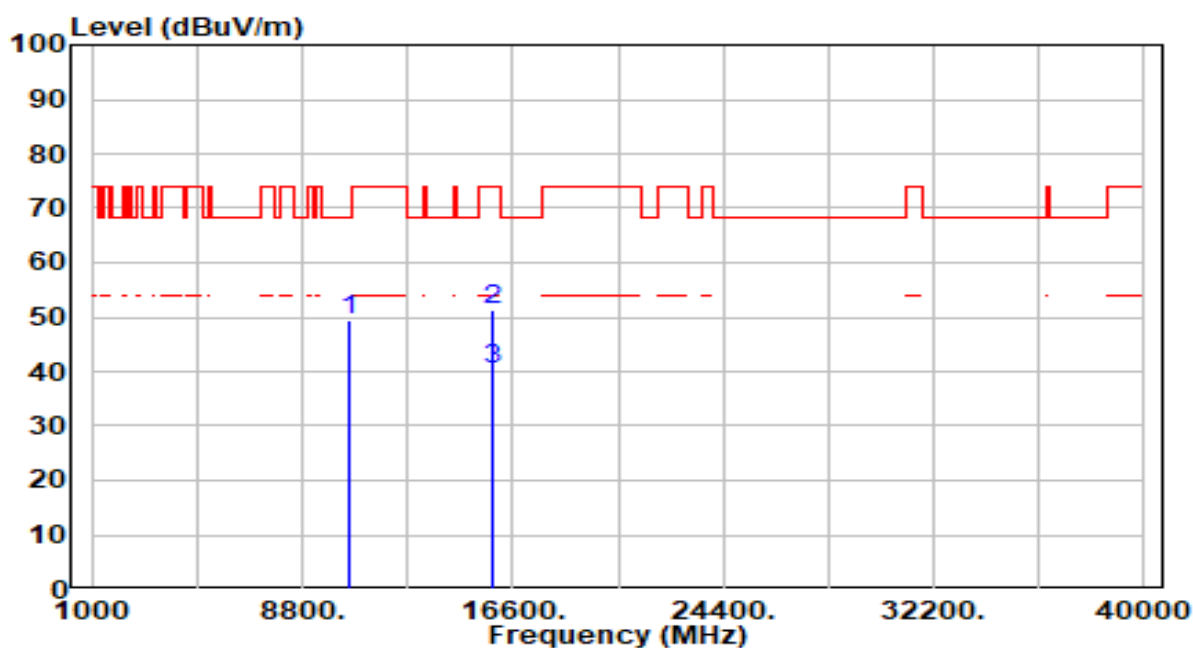


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10580.000	42.69	6.64	49.33	-18.87	68.20	100	239	Peak
2		15870.000	42.03	9.12	51.16	-22.84	74.00	100	0	Peak
3	*	15870.000	31.08	9.12	40.20	-13.80	54.00	100	0	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 6+7	Test Voltage	By Notebook PC

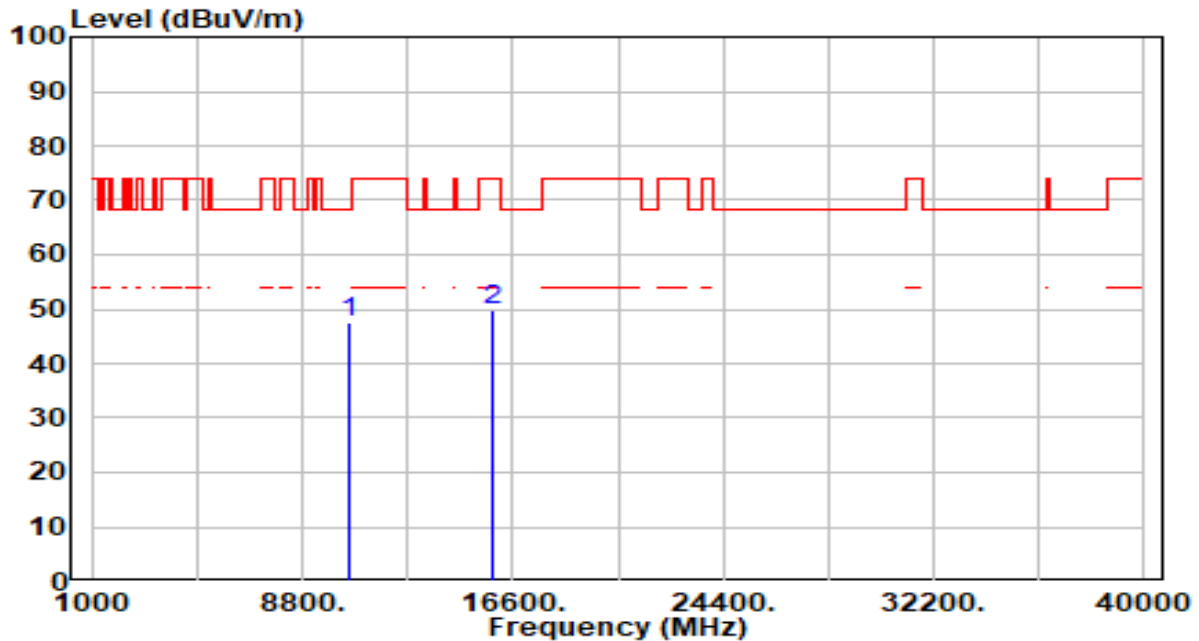


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10580.000	40.89	6.64	47.52	-20.68	68.20	100	235	Peak
2		15870.000	40.83	9.12	49.95	-24.05	74.00	100	140	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 6+7	Test Voltage	By Notebook PC

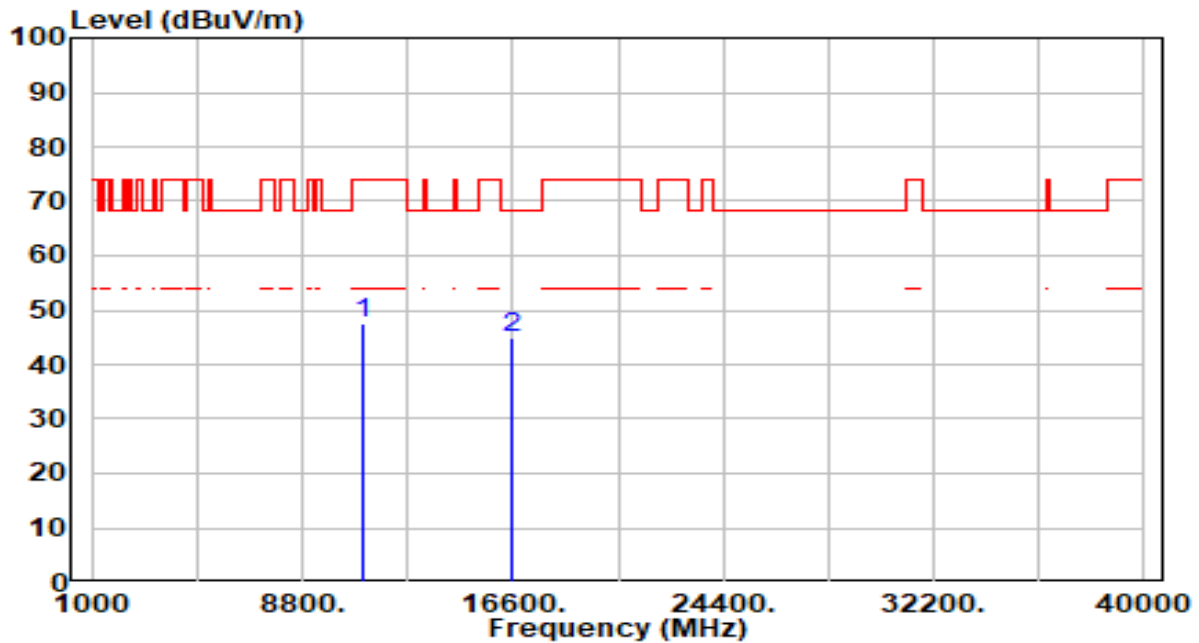


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11060.000	41.12	6.54	47.65	-26.35	74.00	100	156	Peak
2	* 16590.000	36.14	8.68	44.82	-23.38	68.20	100	165	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 6+7	Test Voltage	By Notebook PC

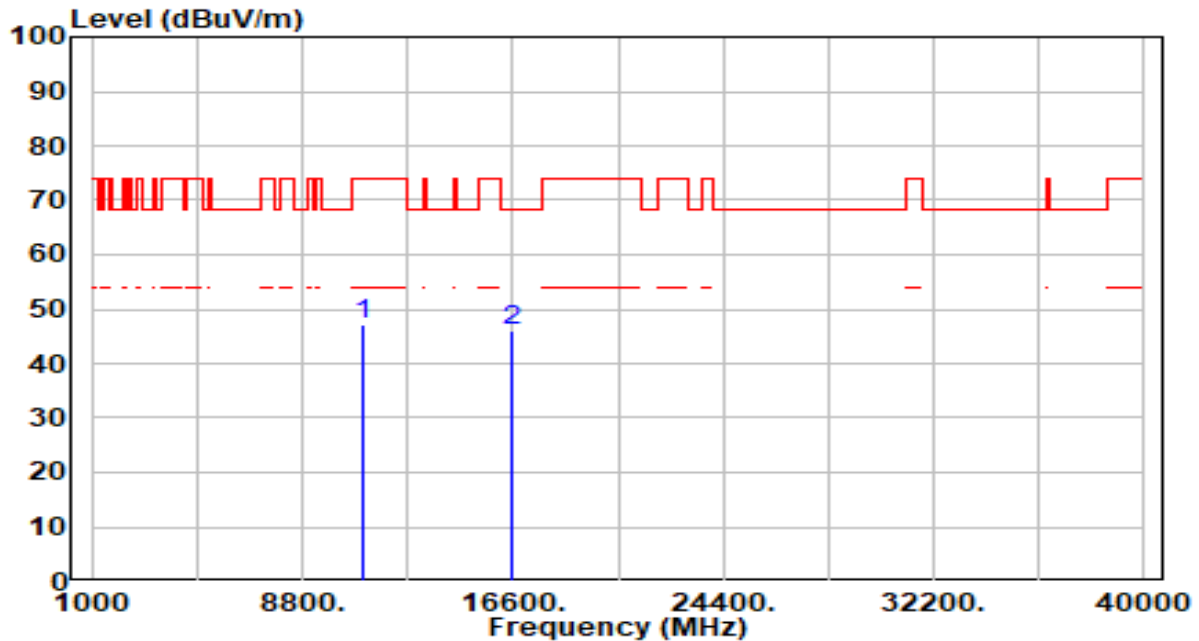


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11060.000	40.69	6.54	47.23	-26.77	74.00	100	36	Peak
2	* 16590.000	37.20	8.68	45.88	-22.32	68.20	100	169	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-80MHz_TX_Band3_CH 122_ANT 6+7	Test Voltage	By Notebook PC

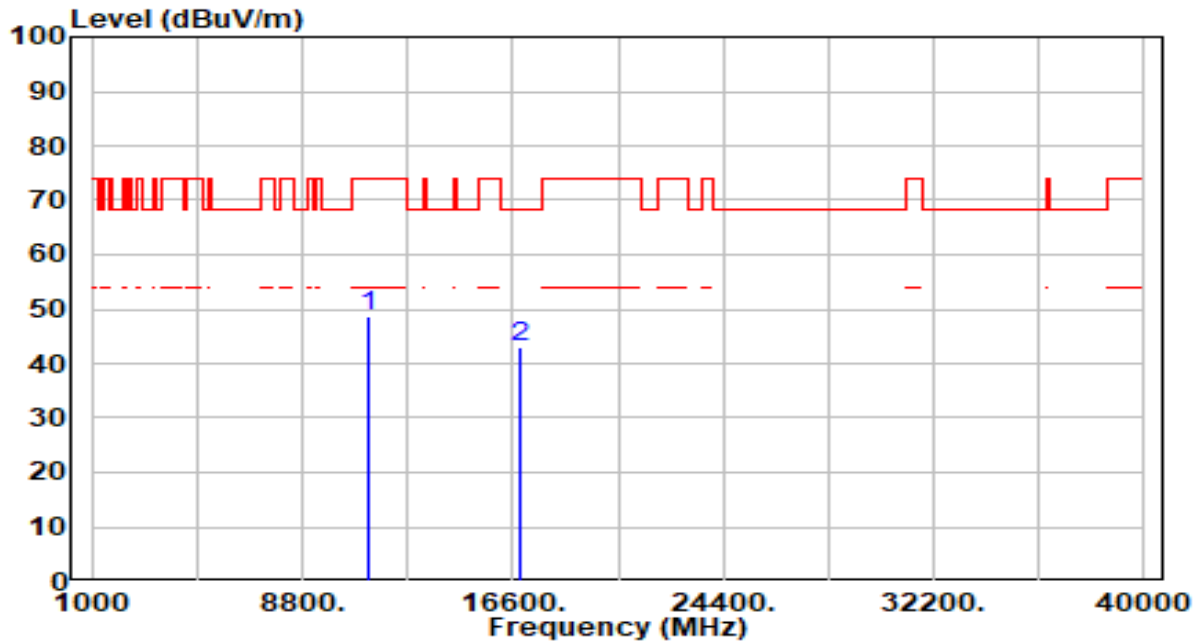


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11220.000	41.85	6.93	48.78	-25.22	74.00	100	169	Peak
2		16830.000	34.25	8.70	42.95	-25.25	68.20	100	163	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-80MHz_TX_Band3_CH 122_ANT 6+7	Test Voltage	By Notebook PC

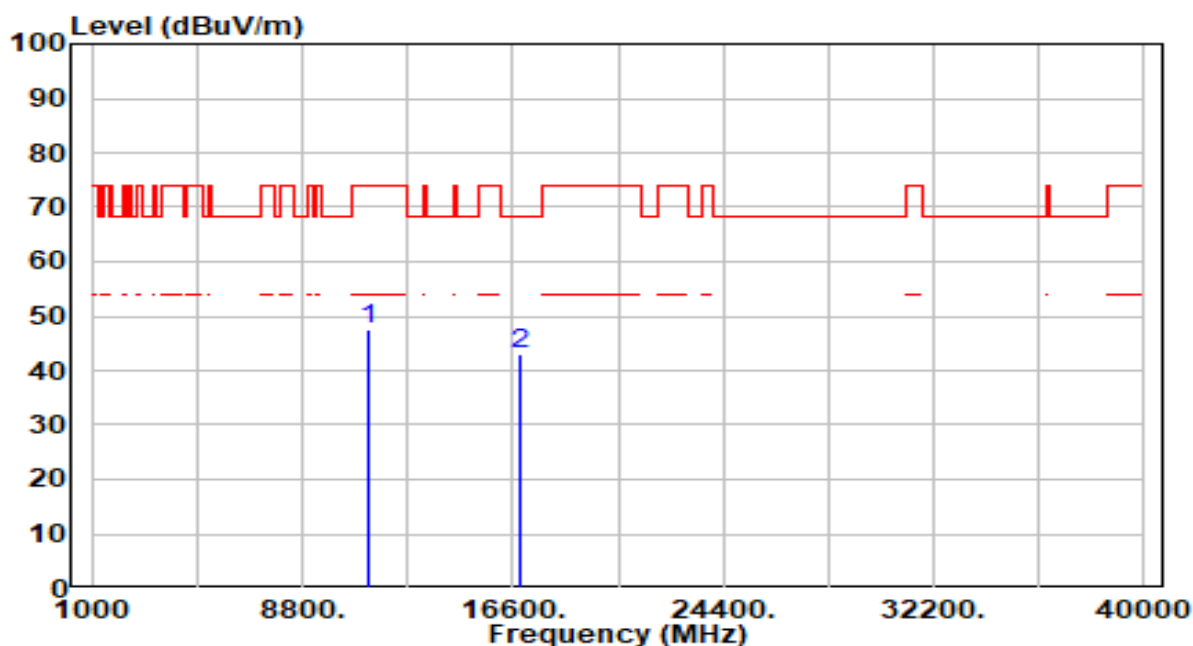


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11220.000	40.79	6.93	47.72	-26.28	74.00	100	325	Peak
2	* 16830.000	34.28	8.70	42.98	-25.22	68.20	100	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-80MHz_TX_Band3_CH 138_ANT 6+7	Test Voltage	By Notebook PC

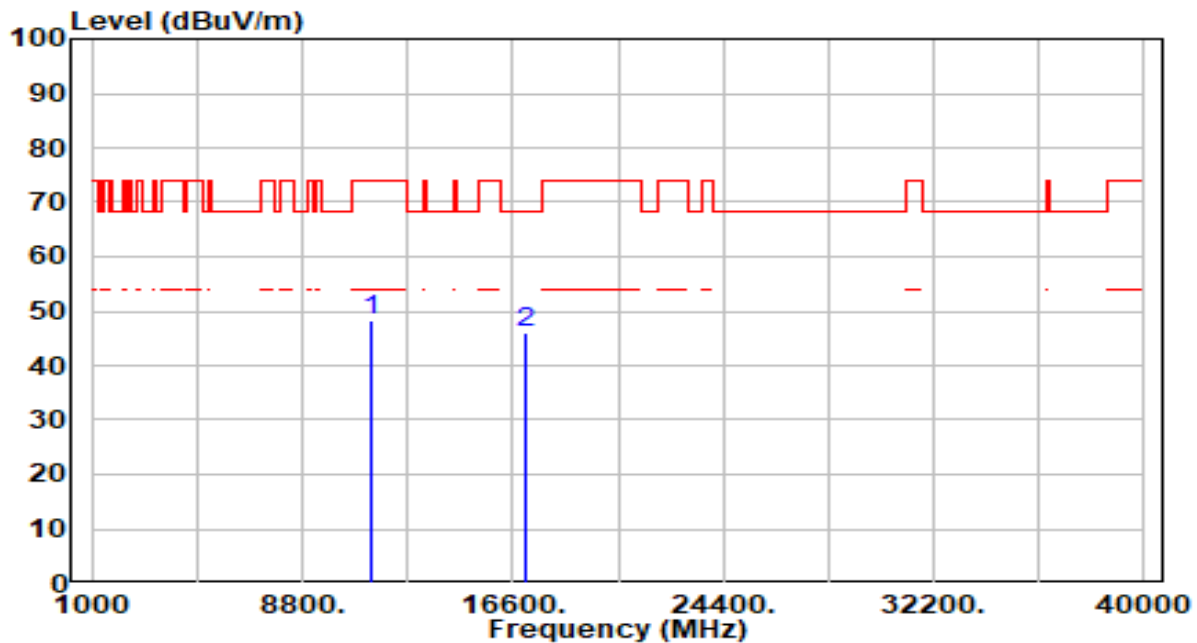


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11380.000	41.18	7.18	48.36	-25.64	74.00	100	155	Peak
2	* 17070.000	37.75	8.29	46.04	-22.16	68.20	100	0	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-80MHz_TX_Band3_CH 138_ANT 6+7	Test Voltage	By Notebook PC

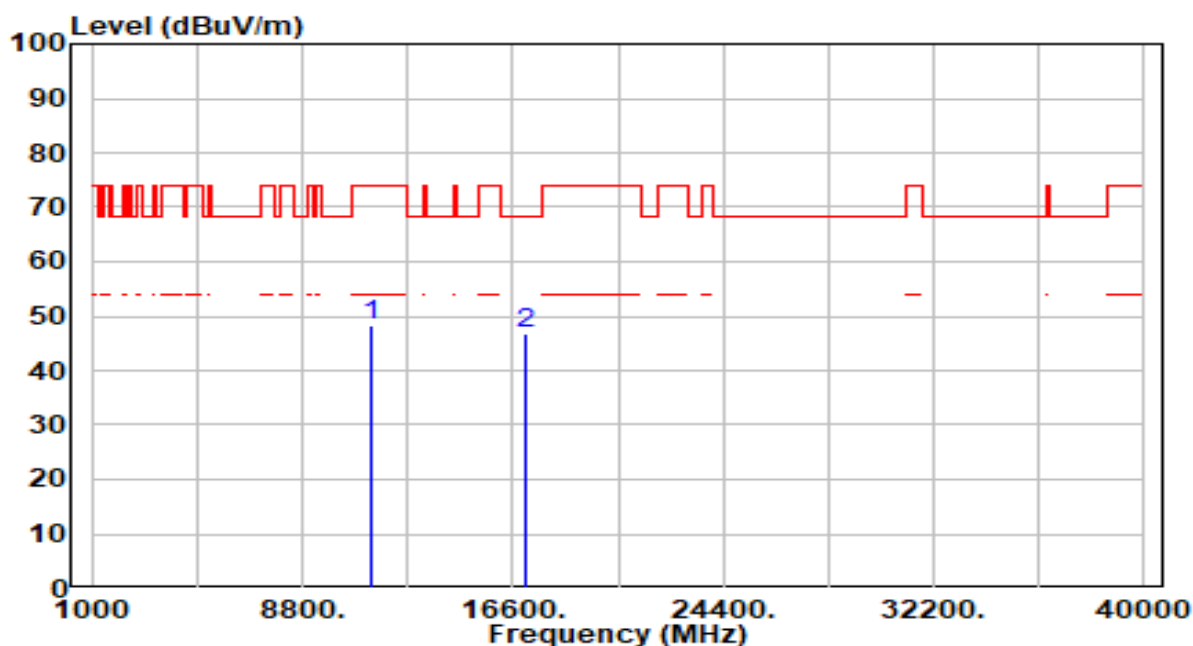


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11380.000	41.20	7.18	48.38	-25.62	74.00	100	18	Peak
2	* 17070.000	38.60	8.29	46.90	-21.30	68.20	100	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-80MHz_TX_Band4_CH 155_ANT 6+7	Test Voltage	By Notebook PC

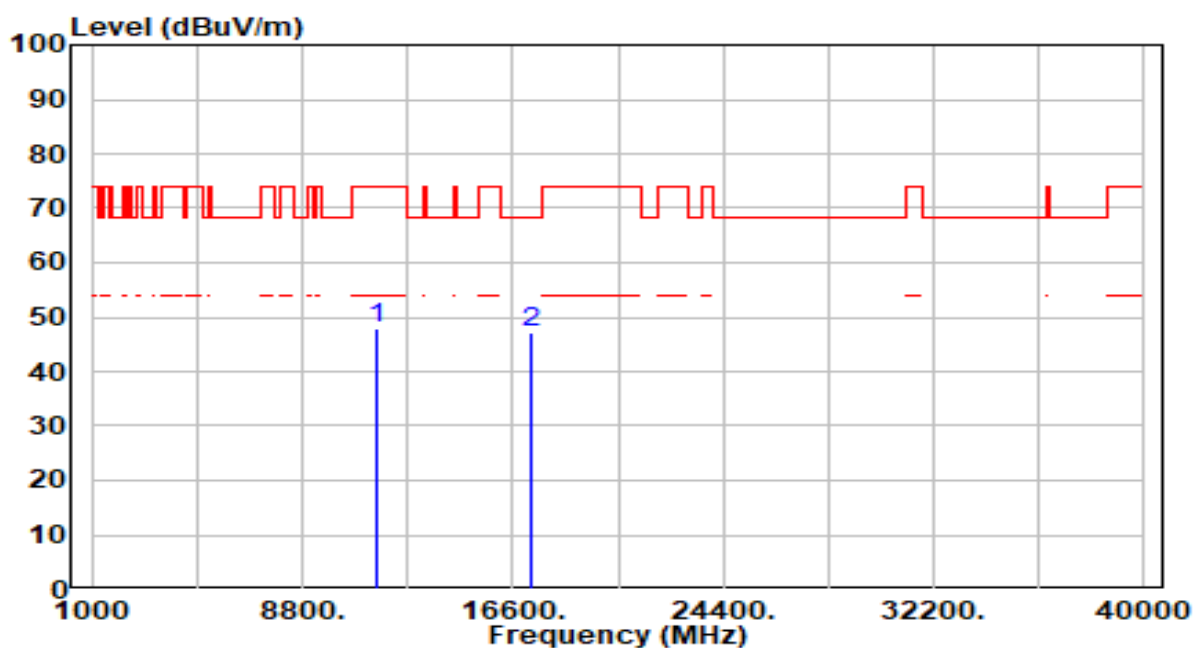


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11550.000	40.76	7.21	47.97	-26.03	74.00	100	60	Peak
2	* 17325.000	39.51	7.50	47.01	-21.19	68.20	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-80MHz_TX_Band4_CH 155_ANT 6+7	Test Voltage	By Notebook PC

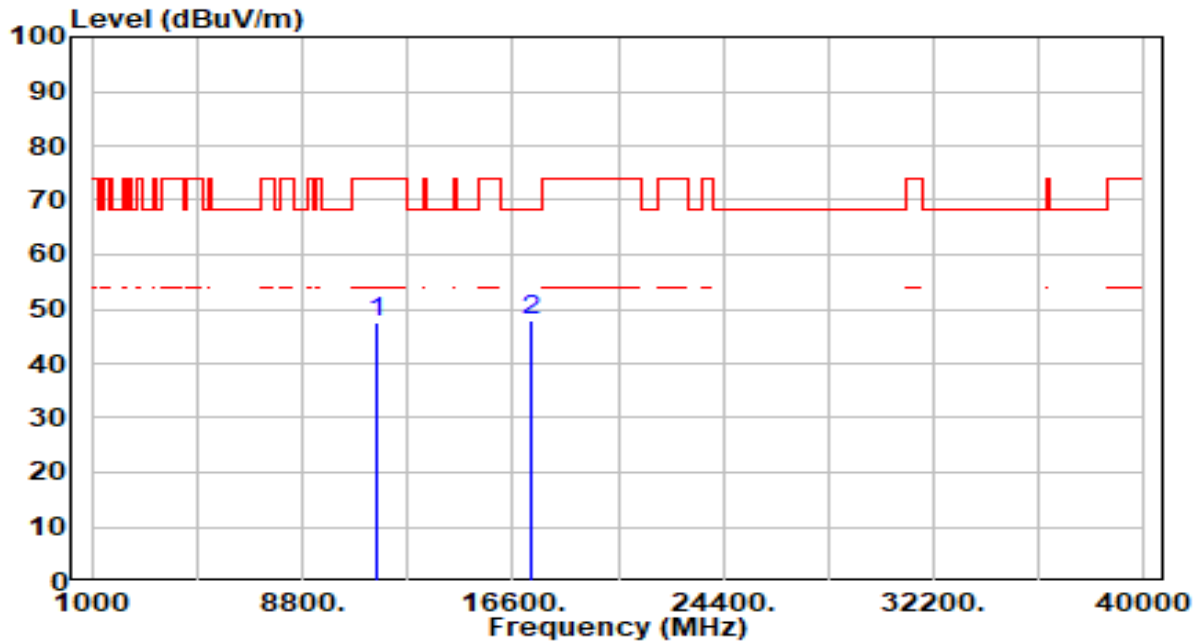


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11550.000	40.29	7.21	47.50	-26.50	74.00	100	163	Peak
2	* 17325.000	40.40	7.50	47.90	-20.30	68.20	100	255	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-160MHz_TX_Band1,2_CH 50_ANT 6+7	Test Voltage	By Notebook PC

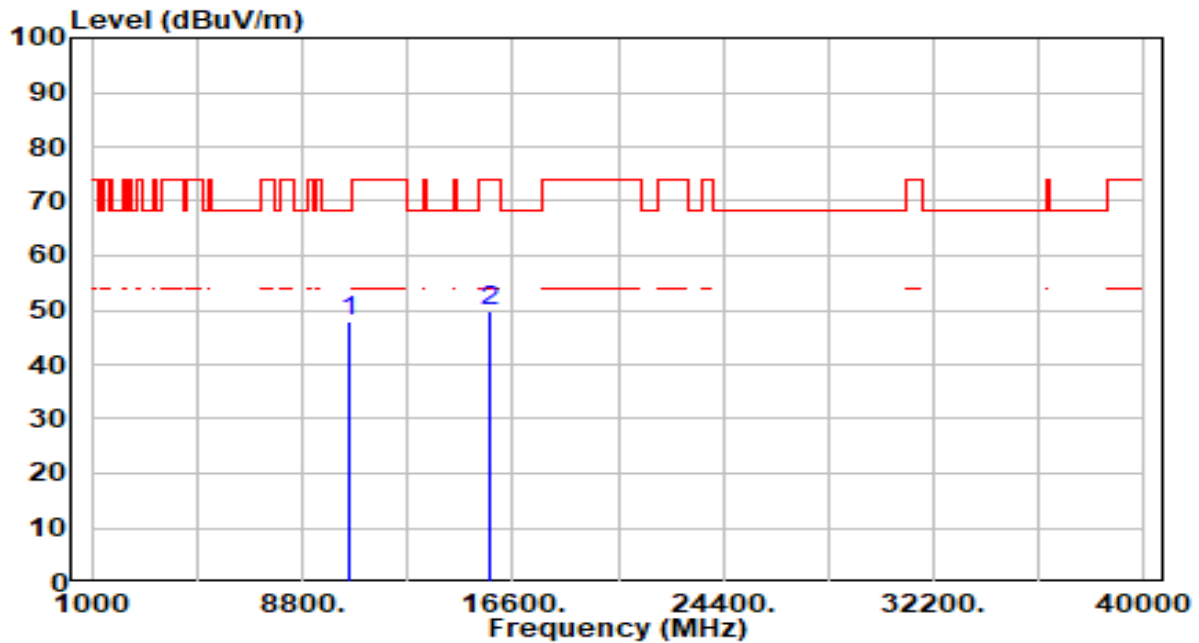


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10500.000	41.27	6.71	47.98	-20.22	68.20	100	204	Peak
2		15750.000	41.04	8.95	50.00	-24.00	74.00	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-160MHz_TX_Band1,2_CH 50_ANT 6+7	Test Voltage	By Notebook PC

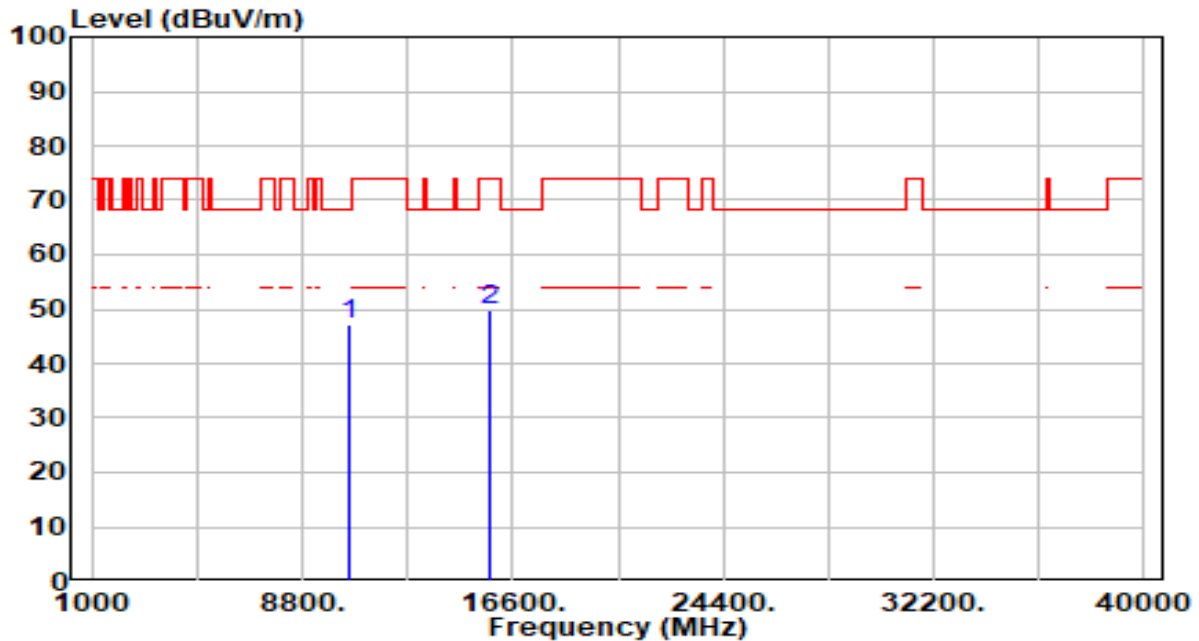


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10500.000	40.45	6.71	47.16	-21.04	68.20	100	307	Peak
2		15750.000	41.01	8.95	49.96	-24.04	74.00	100	83	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-160MHz_TX_Band3_CH 114_ANT 6+7	Test Voltage	By Notebook PC

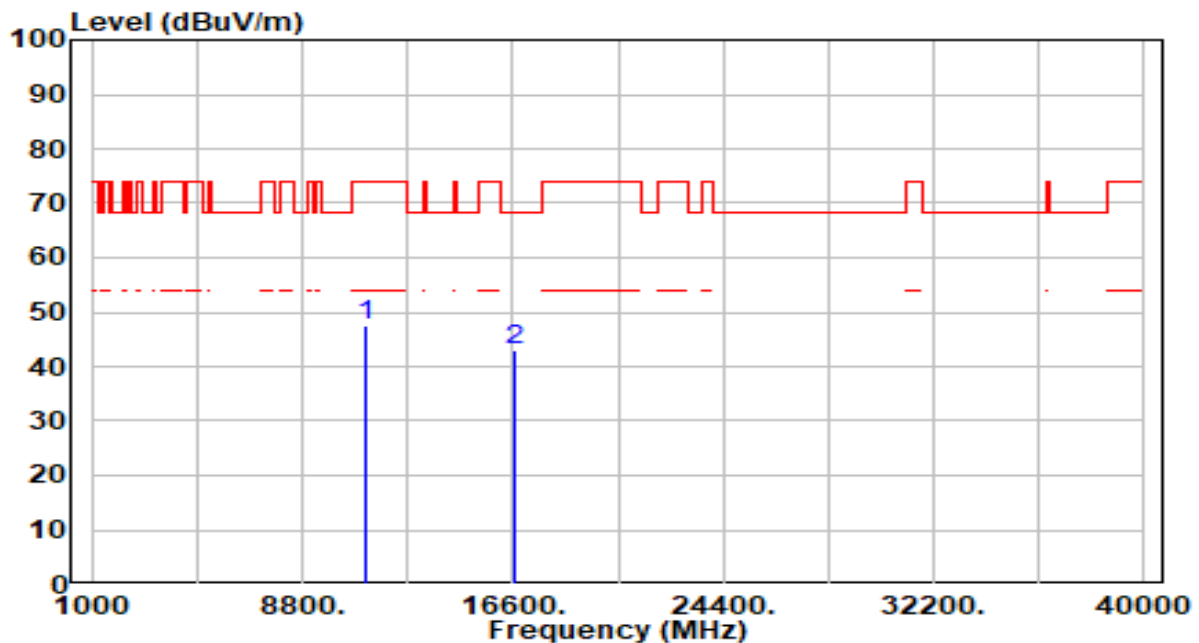


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11140.000	40.72	6.73	47.45	-26.55	74.00	100	145	Peak
2	* 16710.000	34.46	8.70	43.17	-25.03	68.20	100	2	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-160MHz_TX_Band3_CH 114_ANT 6+7	Test Voltage	By Notebook PC

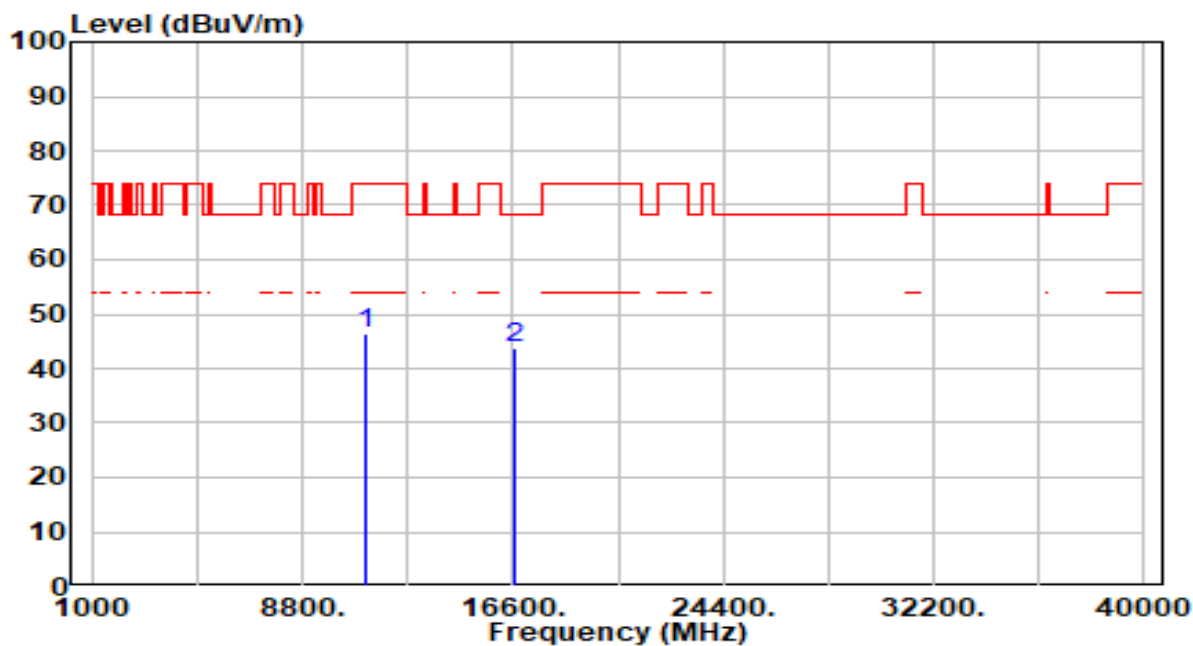


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11140.000	39.83	6.73	46.56	-27.44	74.00	100	327	Peak
2	* 16710.000	35.10	8.70	43.81	-24.39	68.20	100	226	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band1_CH 36_ANT 6+7	Test Voltage	By Notebook PC

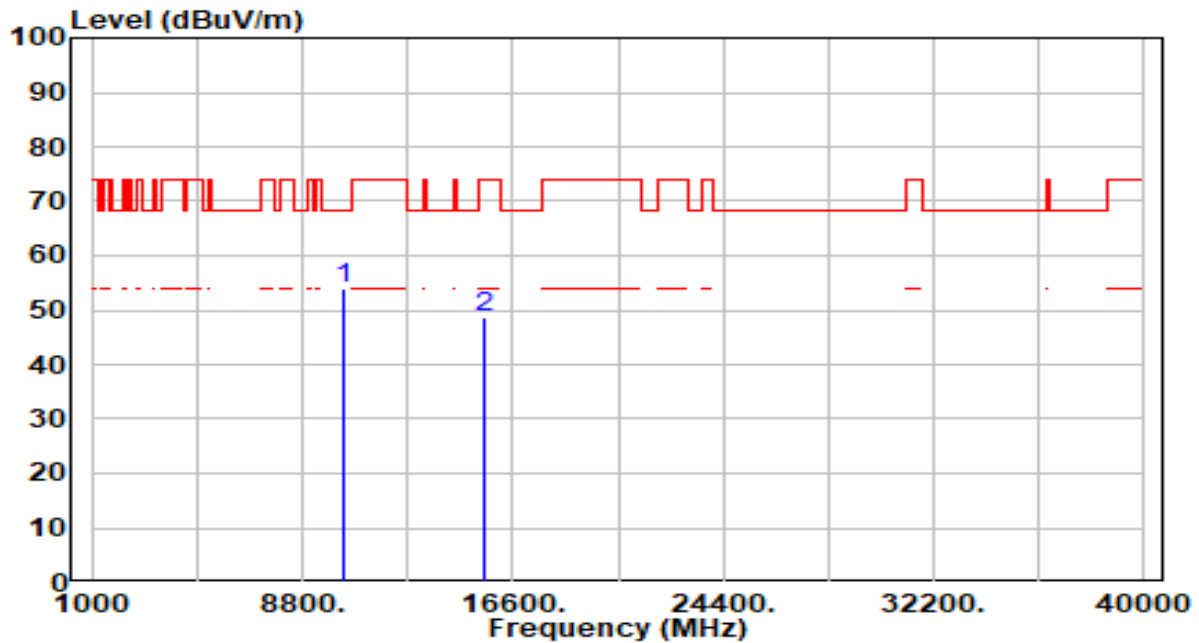


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10360.000	47.12	6.84	53.97	-14.23	68.20	100	206	Peak
2		15540.000	39.80	8.70	48.50	-25.50	74.00	100	23	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band1_CH 36_ANT 6+7	Test Voltage	By Notebook PC

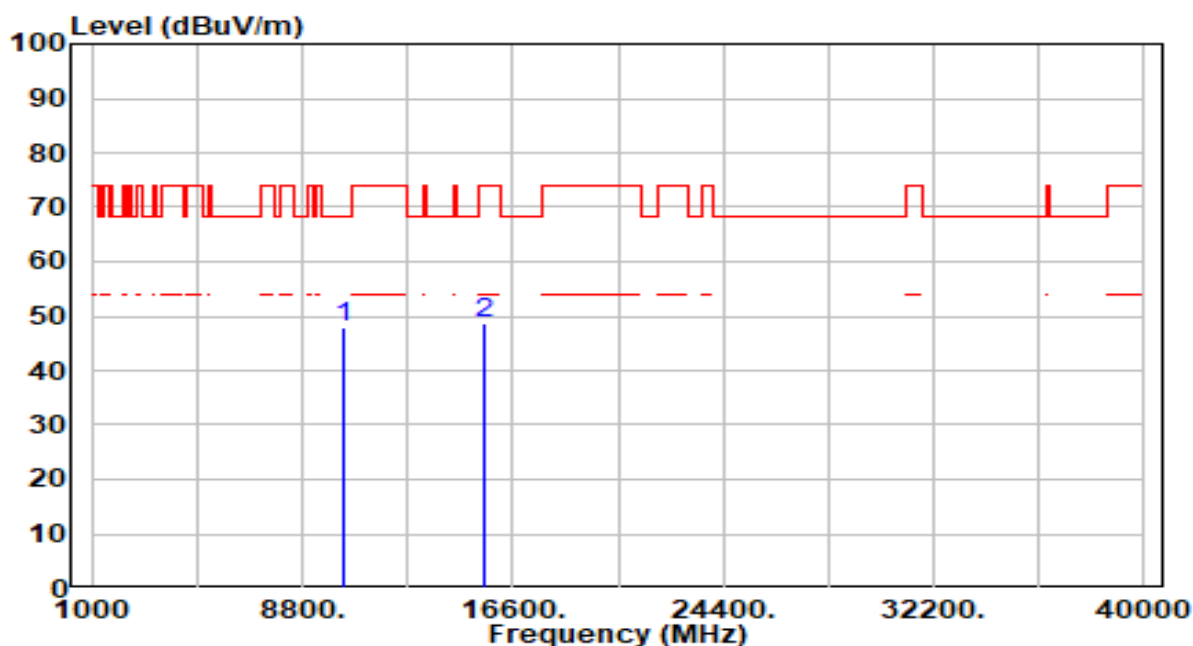


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10360.000	41.03	6.84	47.87	-20.33	68.20	100	334	Peak
2		15540.000	40.11	8.70	48.81	-25.19	74.00	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band1_CH 40_ANT 6+7	Test Voltage	By Notebook PC

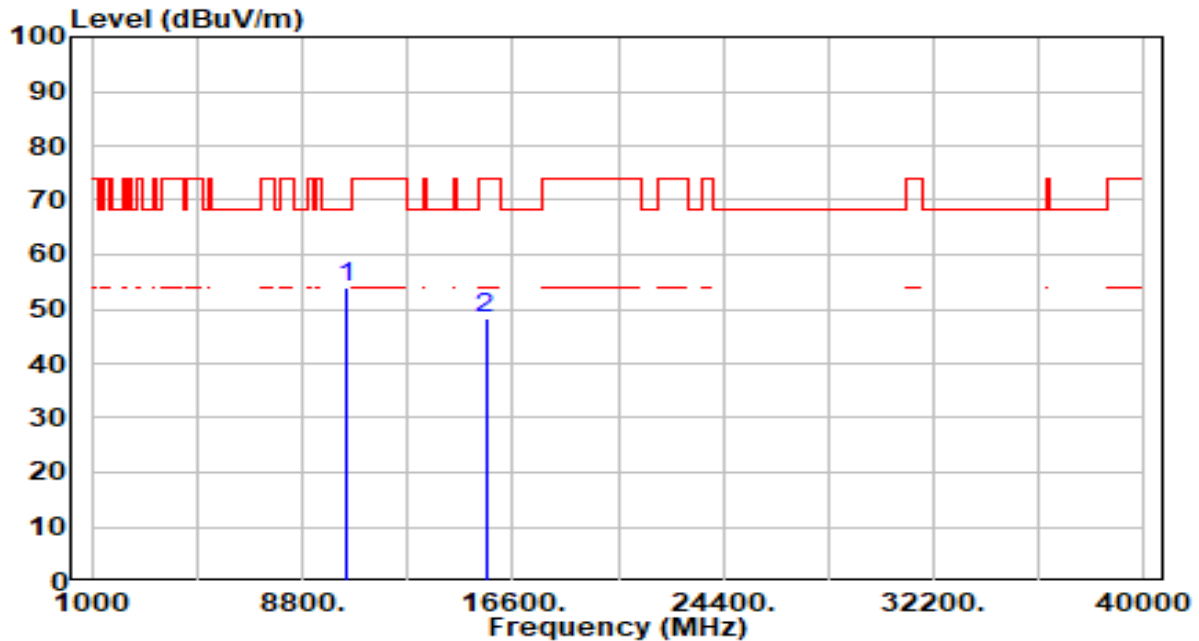


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10400.000	47.31	6.82	54.12	-14.08	68.20	100	208	Peak
2		15600.000	39.68	8.62	48.29	-25.71	74.00	100	136	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band1_CH 40_ANT 6+7	Test Voltage	By Notebook PC

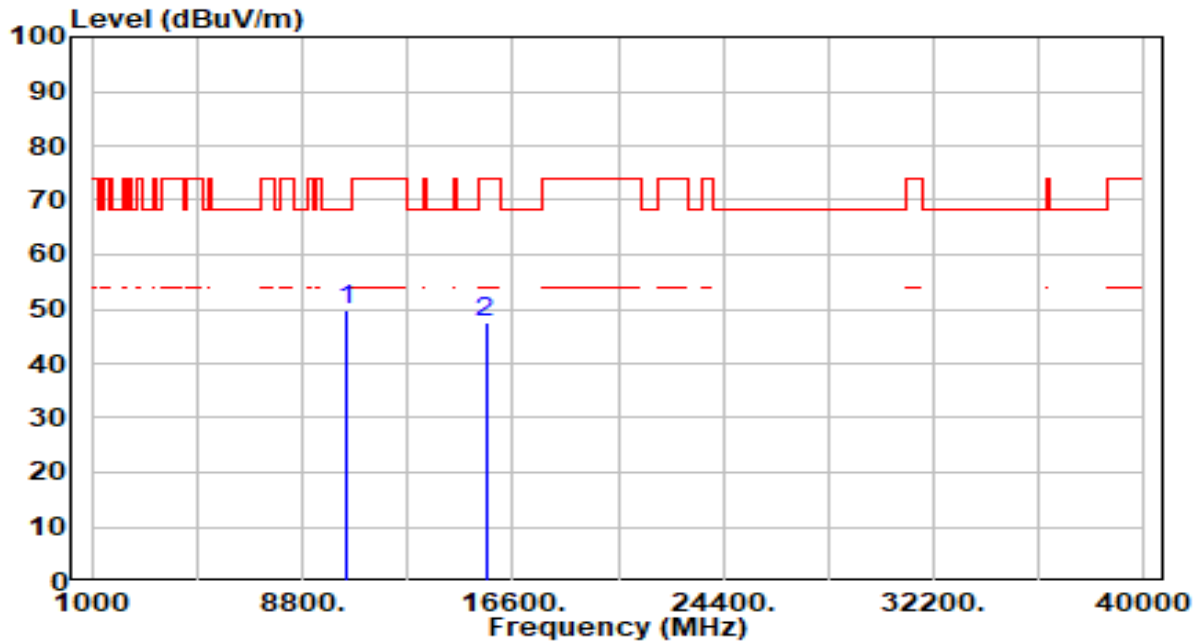


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10400.000	43.04	6.82	49.85	-18.35	68.20	100	314	Peak
2		15600.000	38.83	8.62	47.45	-26.55	74.00	100	227	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band1_CH 48_ANT 6+7	Test Voltage	By Notebook PC

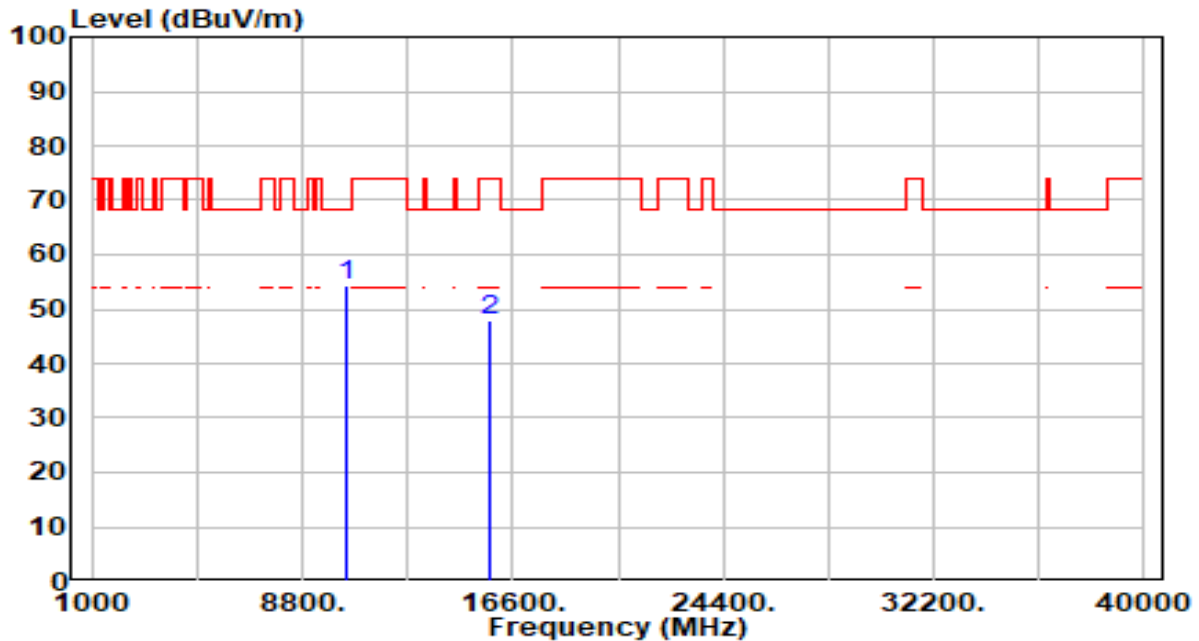


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10480.000	47.60	6.74	54.34	-13.86	68.20	100	161	Peak
2		15720.000	39.06	8.90	47.96	-26.04	74.00	100	333	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band1_CH 48_ANT 6+7	Test Voltage	By Notebook PC

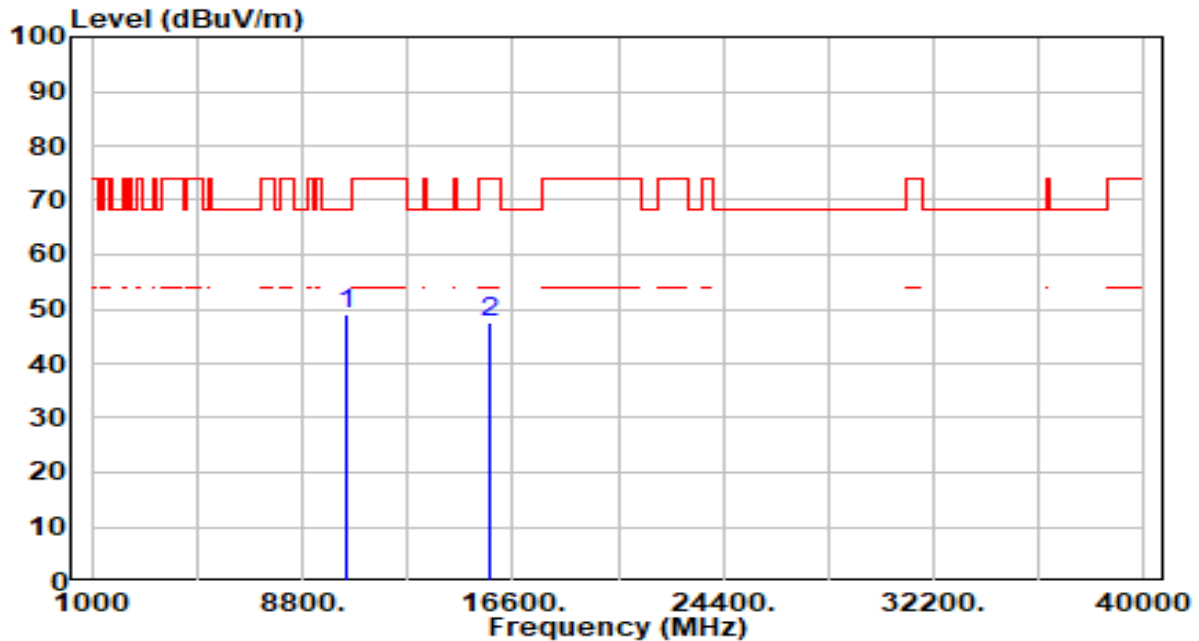


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10480.000	42.28	6.74	49.01	-19.19	68.20	100	23	Peak
2		15720.000	38.47	8.90	47.37	-26.63	74.00	100	77	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band2_CH 52_ANT 6+7	Test Voltage	By Notebook PC

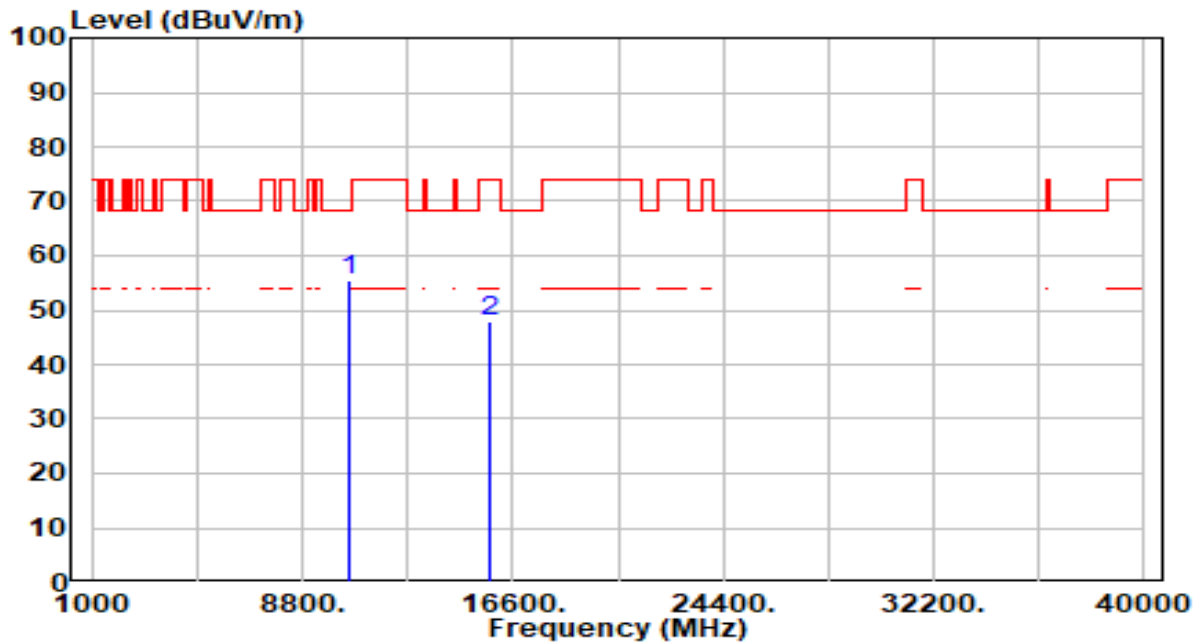


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10520.000	48.92	6.70	55.61	-12.59	68.20	100	223	Peak
2		15780.000	38.94	9.00	47.95	-26.05	74.00	100	125	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band2_CH 52_ANT 6+7	Test Voltage	By Notebook PC

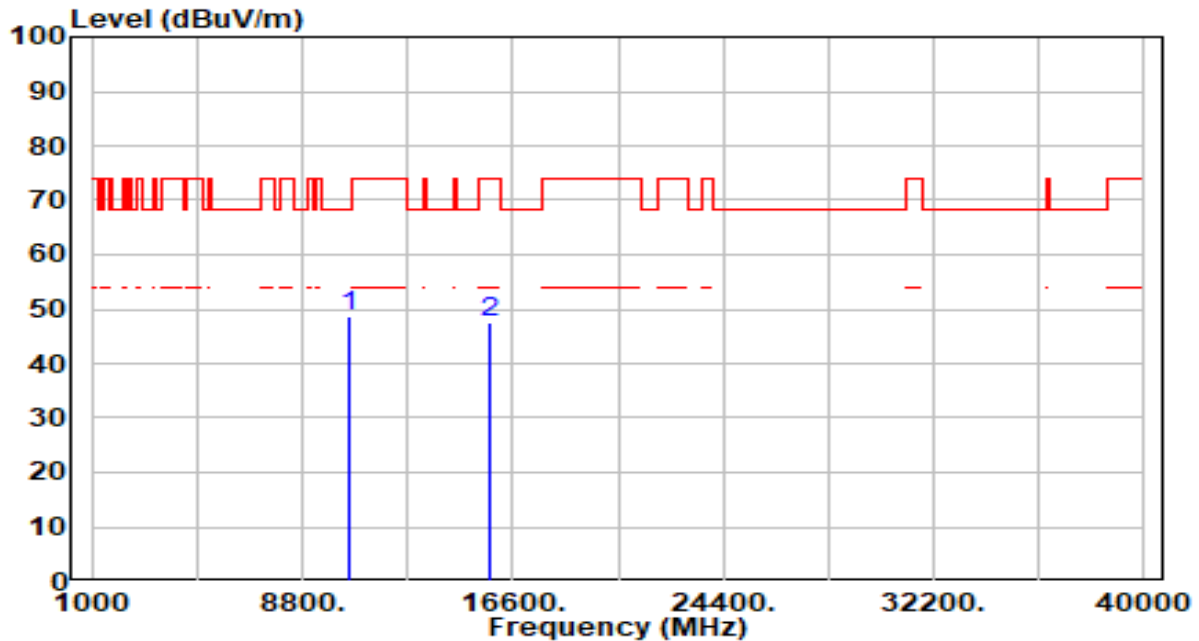


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10520.000	42.08	6.70	48.78	-19.42	68.20	100	238	Peak
2		15780.000	38.51	9.00	47.52	-26.48	74.00	100	224	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band2_CH 60_ANT 6+7	Test Voltage	By Notebook PC

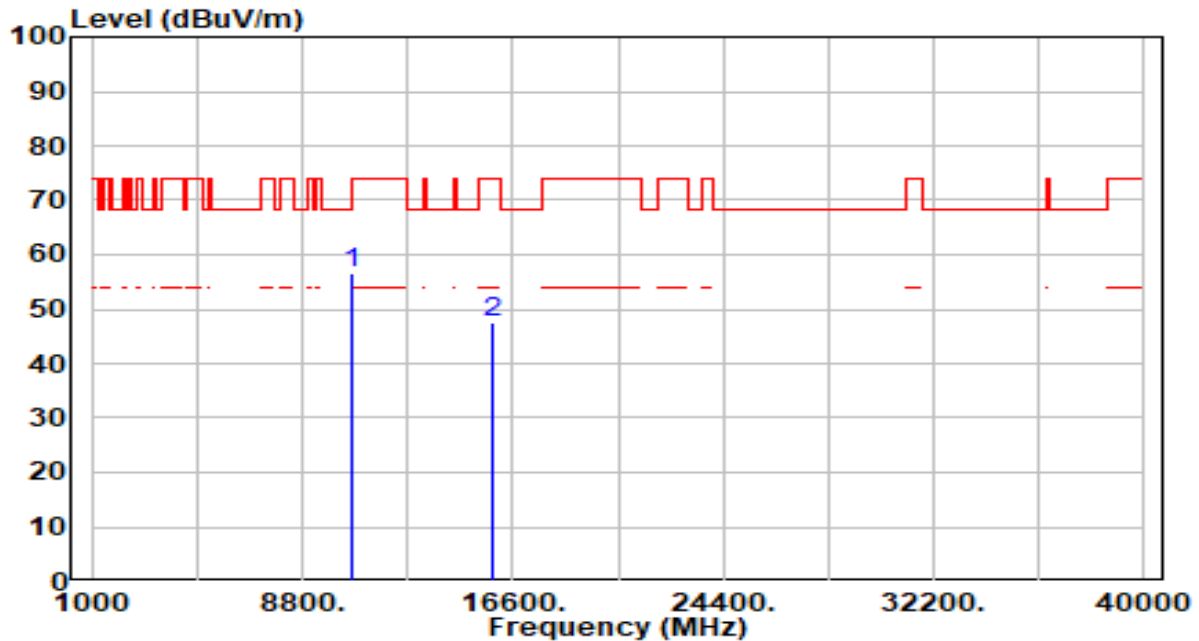


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10600.000	50.10	6.62	56.71	-11.49	68.20	100	244	Peak
2		15900.000	38.31	9.16	47.47	-26.53	74.00	100	287	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band2_CH 60_ANT 6+7	Test Voltage	By Notebook PC

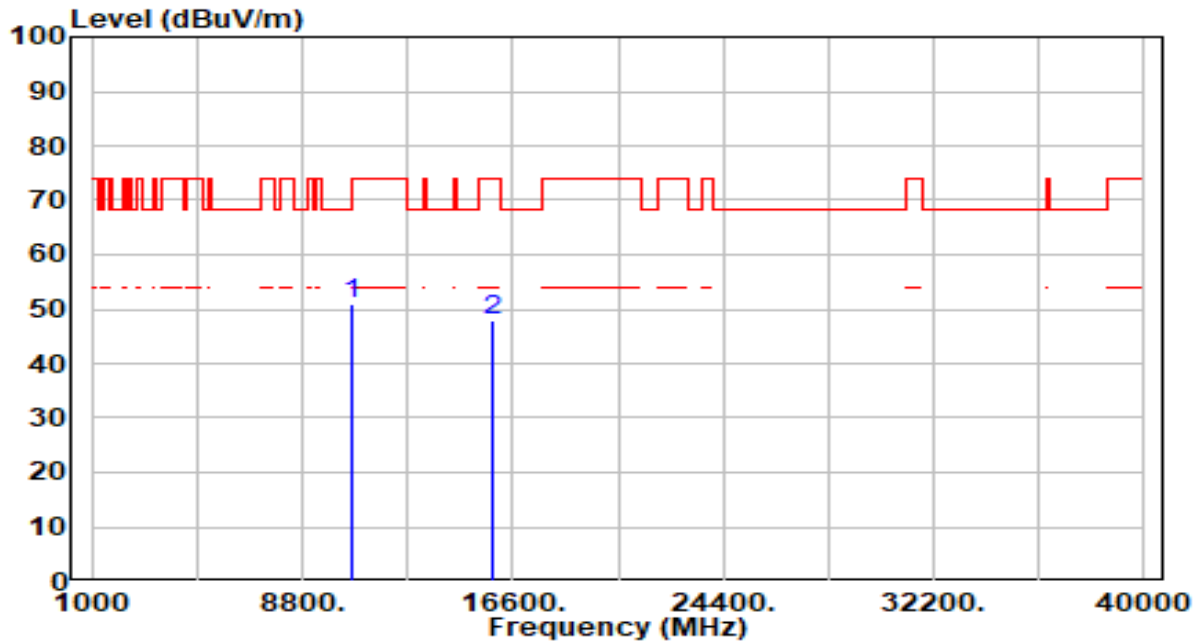


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10600.000	44.30	6.62	50.92	-17.28	68.20	100	328	Peak
2		15900.000	38.86	9.16	48.02	-25.98	74.00	100	192	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band2_CH 64_ANT 6+7	Test Voltage	By Notebook PC

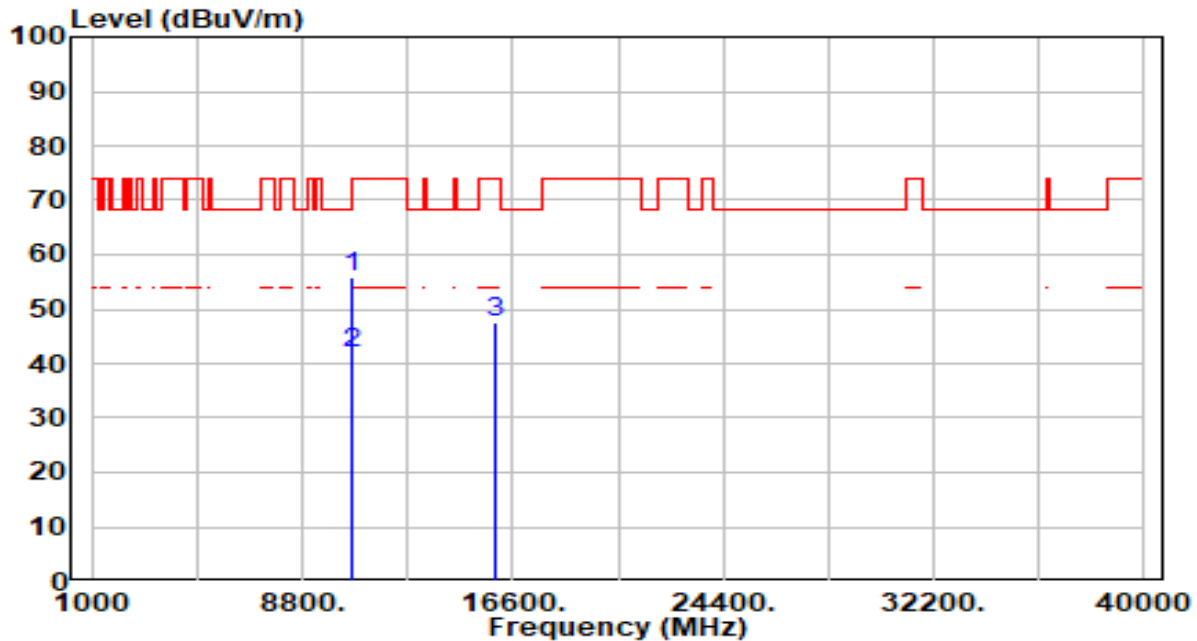


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10640.000	49.29	6.63	55.92	-18.08	74.00	100	225	Peak
2	*	10640.000	35.36	6.63	41.99	-12.01	54.00	100	225	Average
3		15960.000	38.43	9.13	47.56	-26.44	74.00	100	46	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band2_CH 64_ANT 6+7	Test Voltage	By Notebook PC

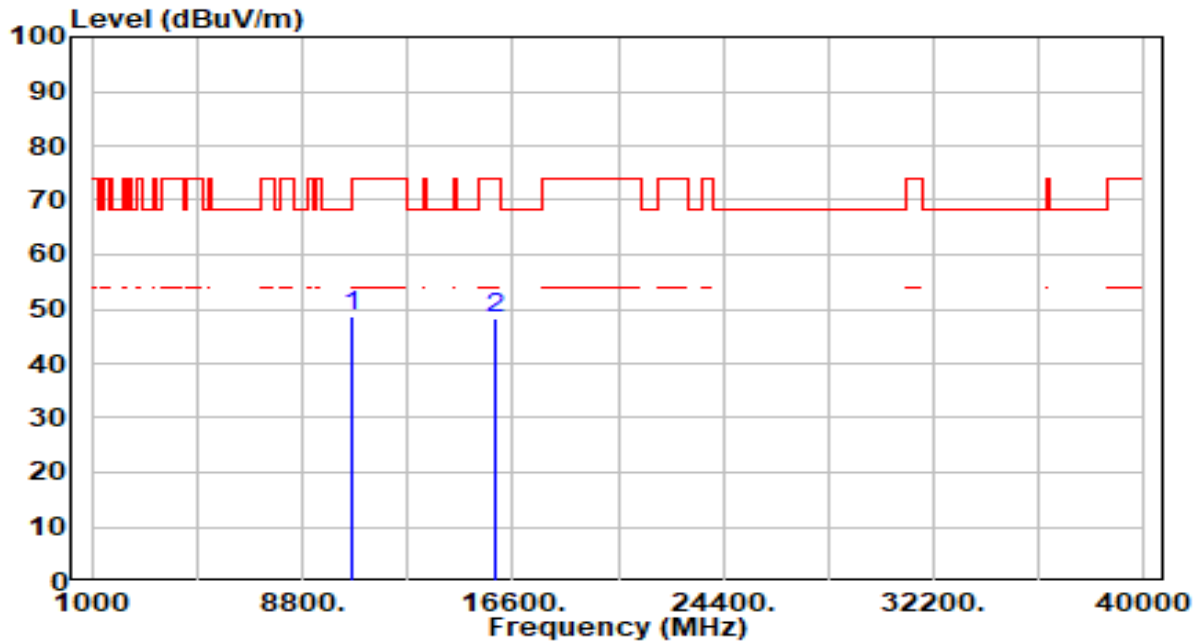


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10640.000	42.17	6.63	48.80	-25.20	74.00	100	349	Peak
2		15960.000	39.15	9.13	48.28	-25.72	74.00	100	257	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band3_CH 100_ANT 6+7	Test Voltage	By Notebook PC

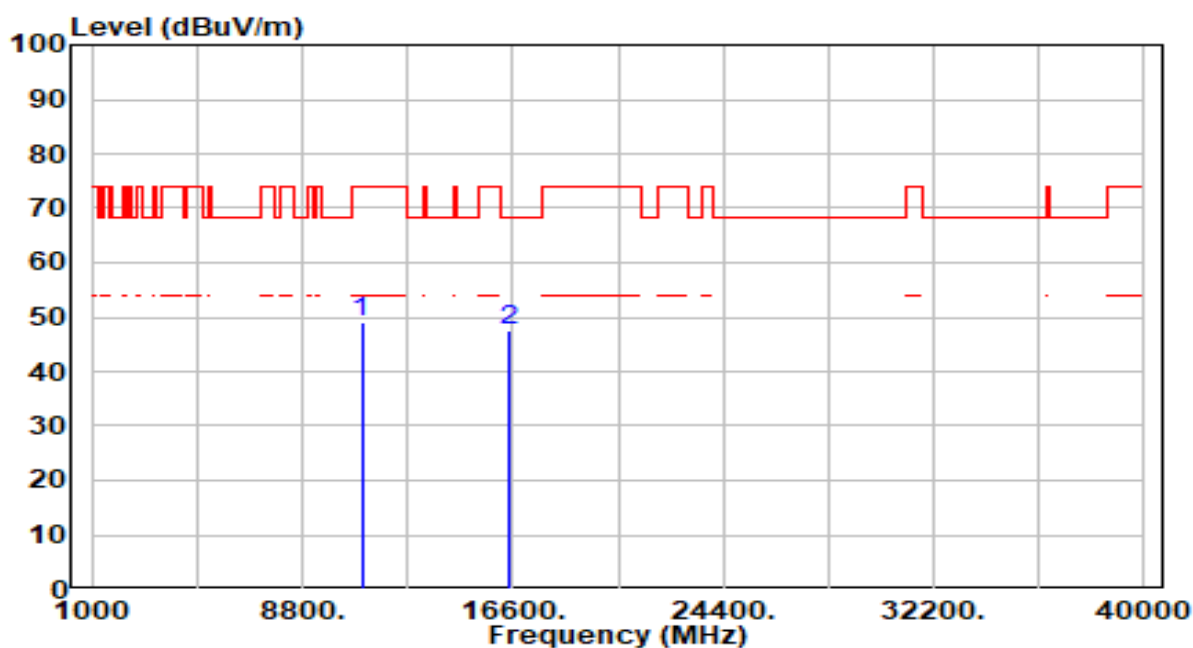


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11000.000	42.73	6.40	49.13	-24.87	74.00	100	221	Peak
2	* 16500.000	38.99	8.74	47.73	-20.47	68.20	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band3_CH 100_ANT 6+7	Test Voltage	By Notebook PC

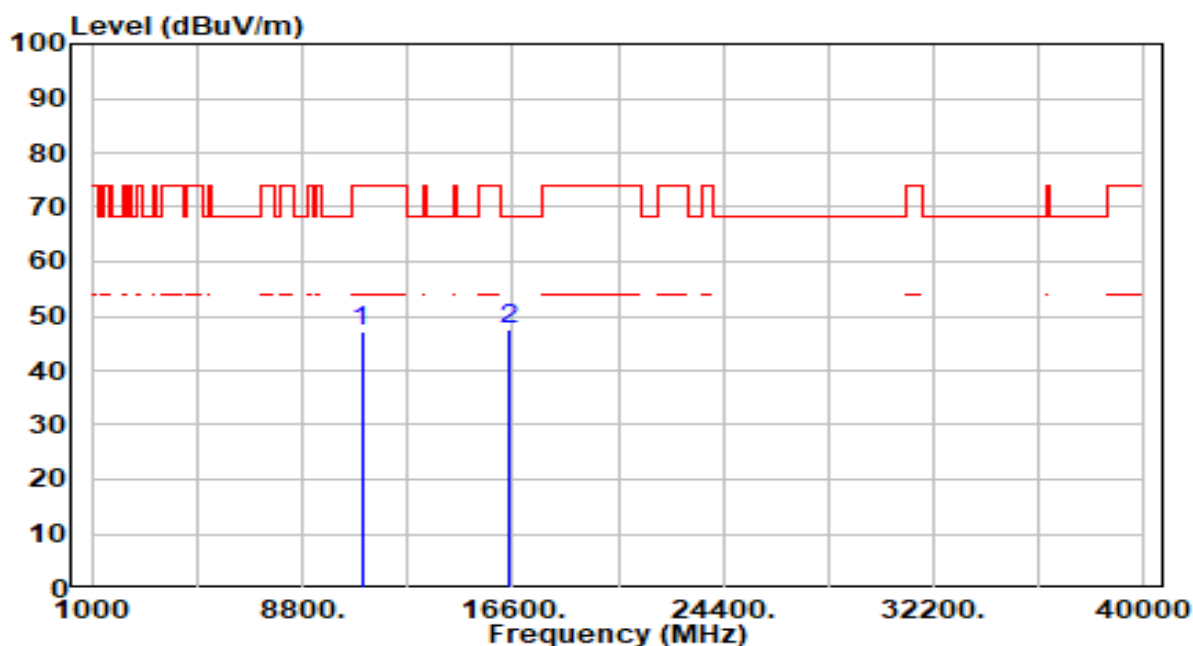


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11000.000	40.66	6.40	47.06	-26.94	74.00	100	10	Peak
2	* 16500.000	38.77	8.74	47.51	-20.69	68.20	100	164	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band3_CH 116_ANT 6+7	Test Voltage	By Notebook PC

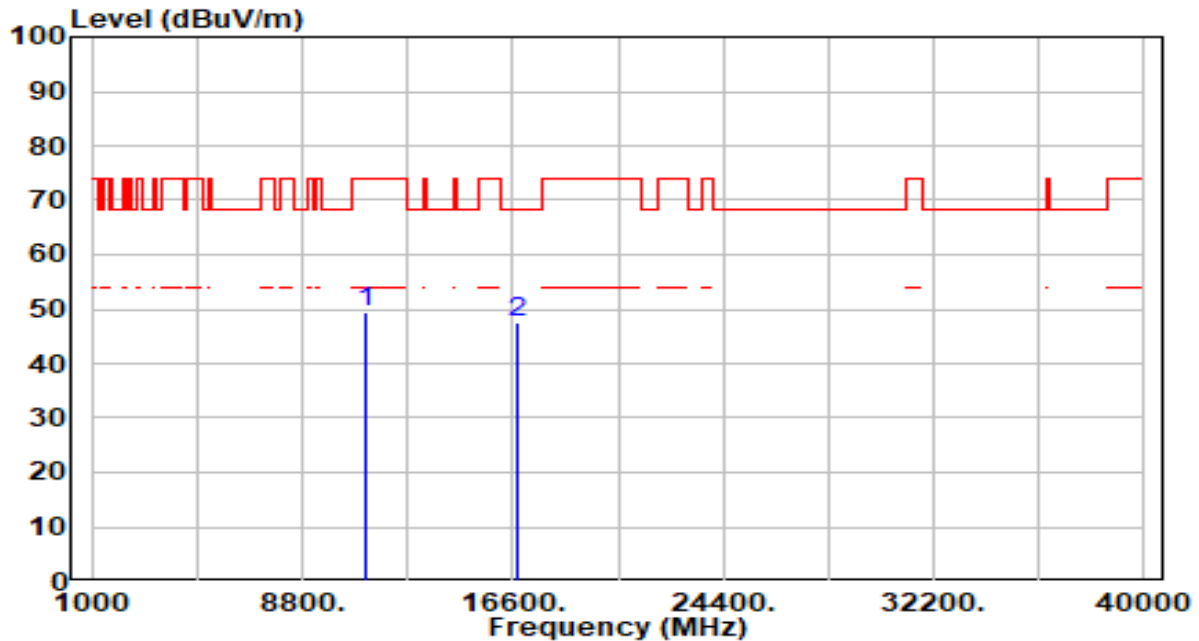


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11160.000	42.79	6.78	49.58	-24.42	74.00	100	165	Peak
2	* 16740.000	38.88	8.71	47.59	-20.61	68.20	100	20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band3_CH 116_ANT 6+7	Test Voltage	By Notebook PC

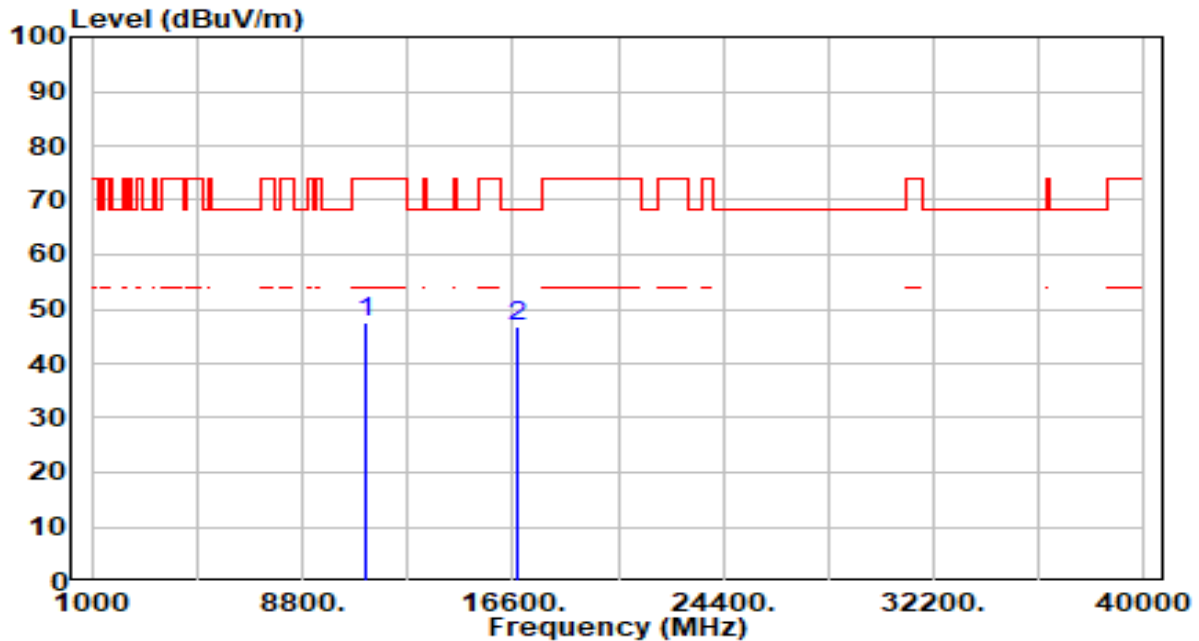


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11160.000	40.68	6.78	47.47	-26.53	74.00	100	360	Peak
2	* 16740.000	38.09	8.71	46.80	-21.40	68.20	100	128	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band3_CH 140_ANT 6+7	Test Voltage	By Notebook PC

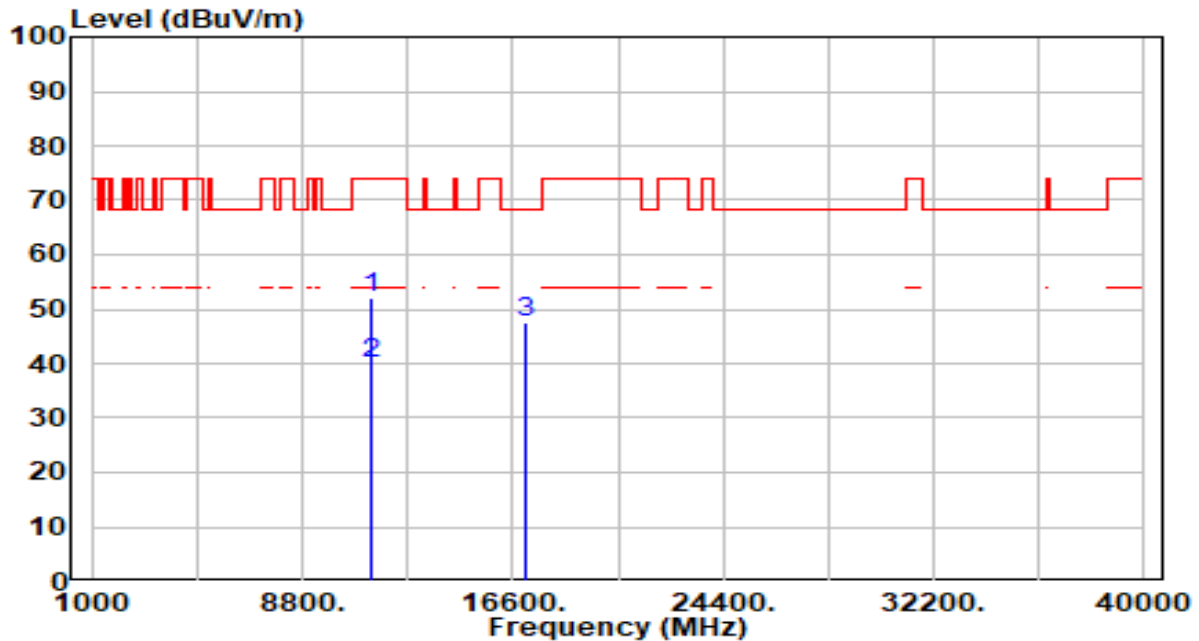


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11400.000	44.76	7.21	51.97	-22.03	74.00	100	124	Peak
2	*	11400.000	32.72	7.21	39.93	-14.07	54.00	100	124	Average
3	*	17100.000	39.15	8.22	47.37	-20.83	68.20	100	167	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band3_CH 140_ANT 6+7	Test Voltage	By Notebook PC

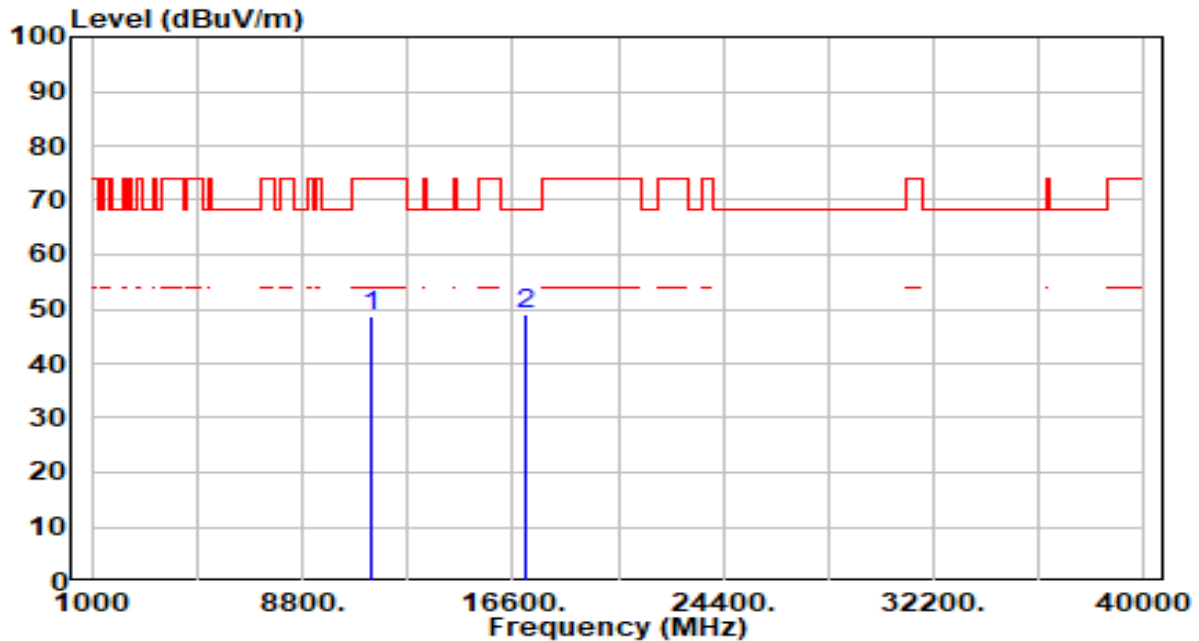


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11400.000	41.55	7.21	48.76	-25.24	74.00	100	360	Peak
2	* 17100.000	40.86	8.22	49.08	-19.12	68.20	100	256	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band3_CH 144_ANT 6+7	Test Voltage	By Notebook PC

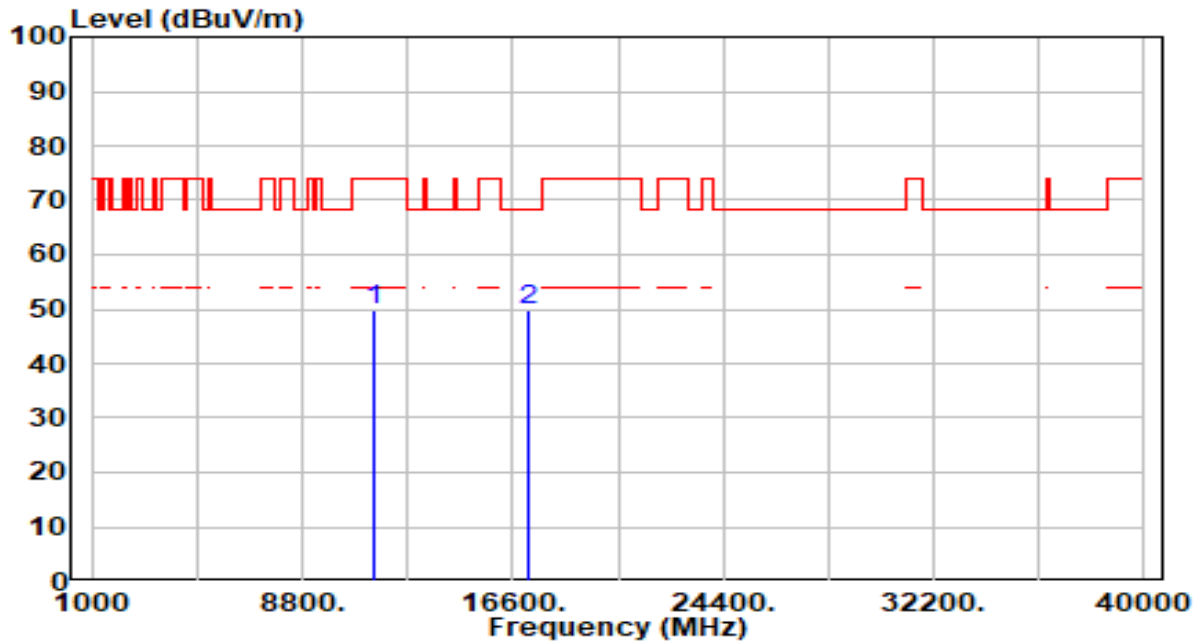


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11440.000	42.78	7.20	49.98	-24.02	74.00	100	148	Peak
2	* 17160.000	41.56	8.09	49.65	-18.55	68.20	100	61	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band3_CH 144_ANT 6+7	Test Voltage	By Notebook PC

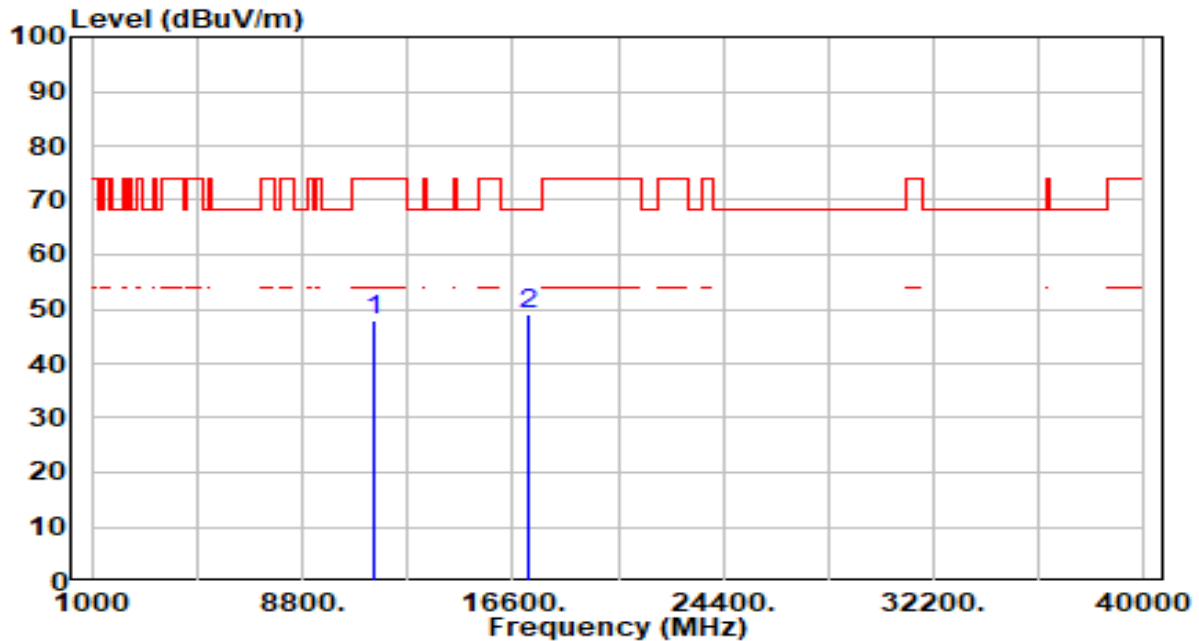


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11440.000	40.79	7.20	47.99	-26.01	74.00	100	360	Peak
2	* 17160.000	40.86	8.09	48.95	-19.25	68.20	100	146	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band4_CH 149_ANT 6+7	Test Voltage	By Notebook PC

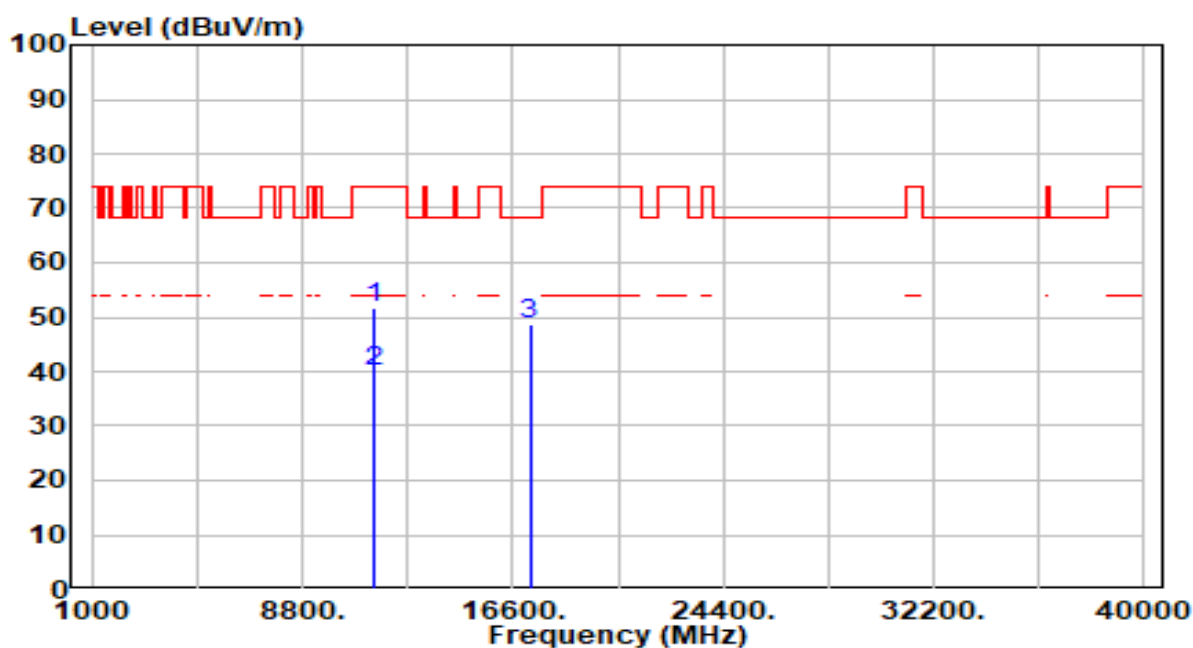


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11490.000	44.56	7.19	51.75	-22.25	74.00	100	116	Peak
2	*	11490.000	32.79	7.19	39.98	-14.02	54.00	100	116	Average
3	*	17235.000	40.99	7.87	48.86	-19.34	68.20	100	229	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band4_CH 149_ANT 6+7	Test Voltage	By Notebook PC

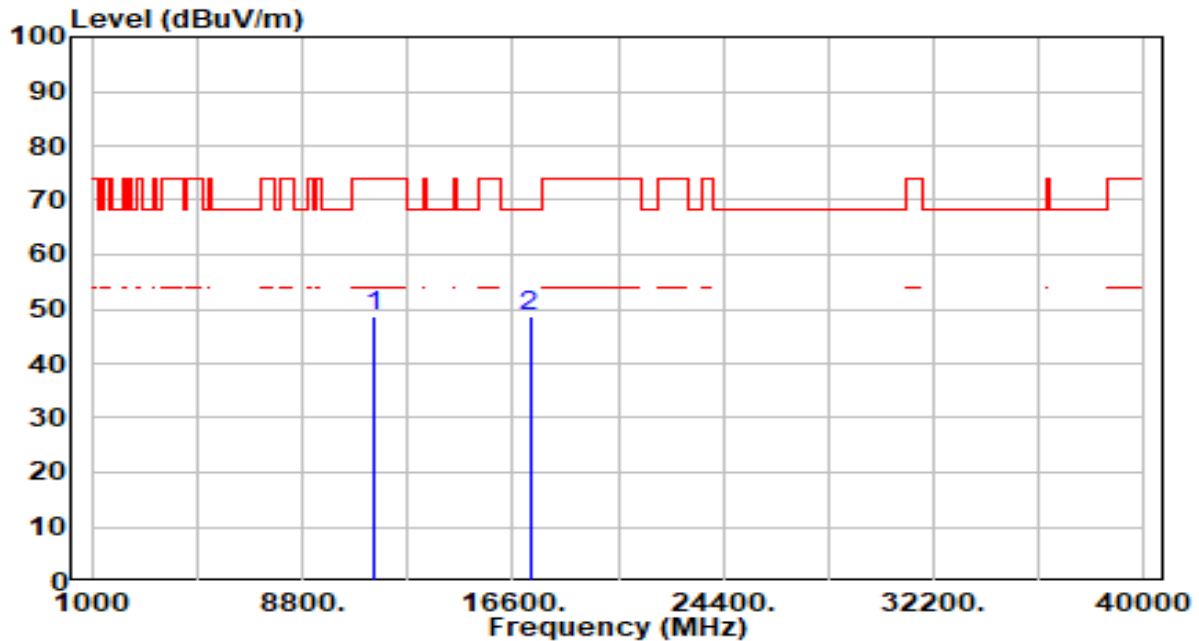


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11490.000	41.45	7.19	48.64	-25.36	74.00	100	106	Peak
2	* 17235.000	40.76	7.87	48.63	-19.57	68.20	100	227	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band4_CH 157_ANT 6+7	Test Voltage	By Notebook PC

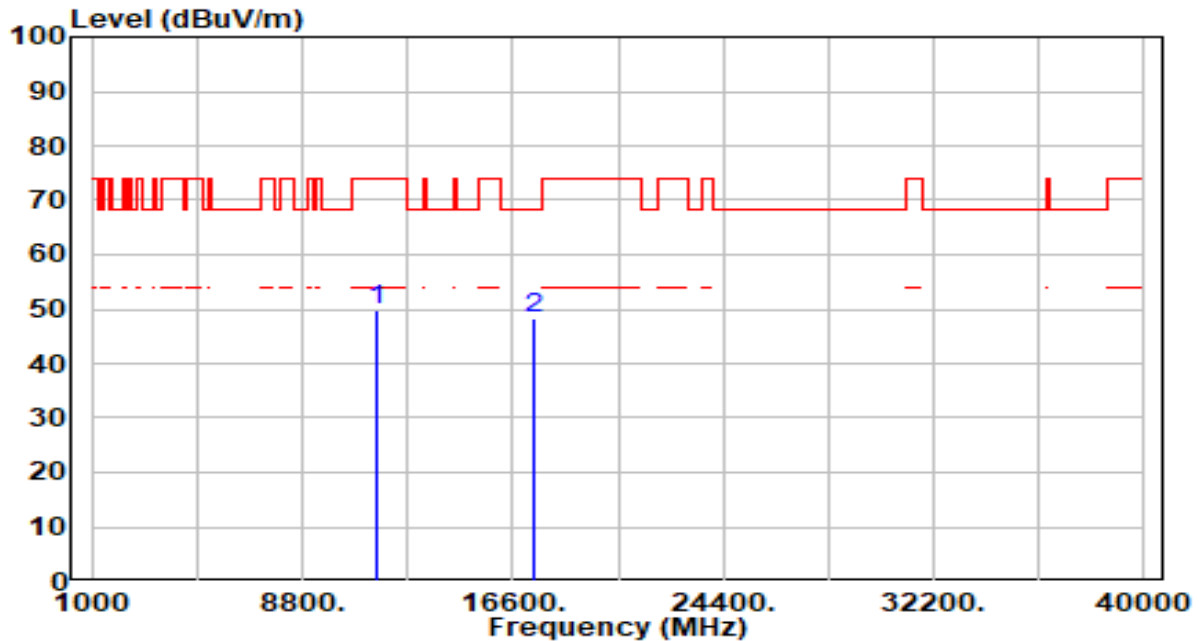


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11570.000	42.74	7.22	49.96	-24.04	74.00	100	138	Peak
2	* 17355.000	41.01	7.35	48.35	-19.85	68.20	100	194	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band4_CH 157_ANT 6+7	Test Voltage	By Notebook PC

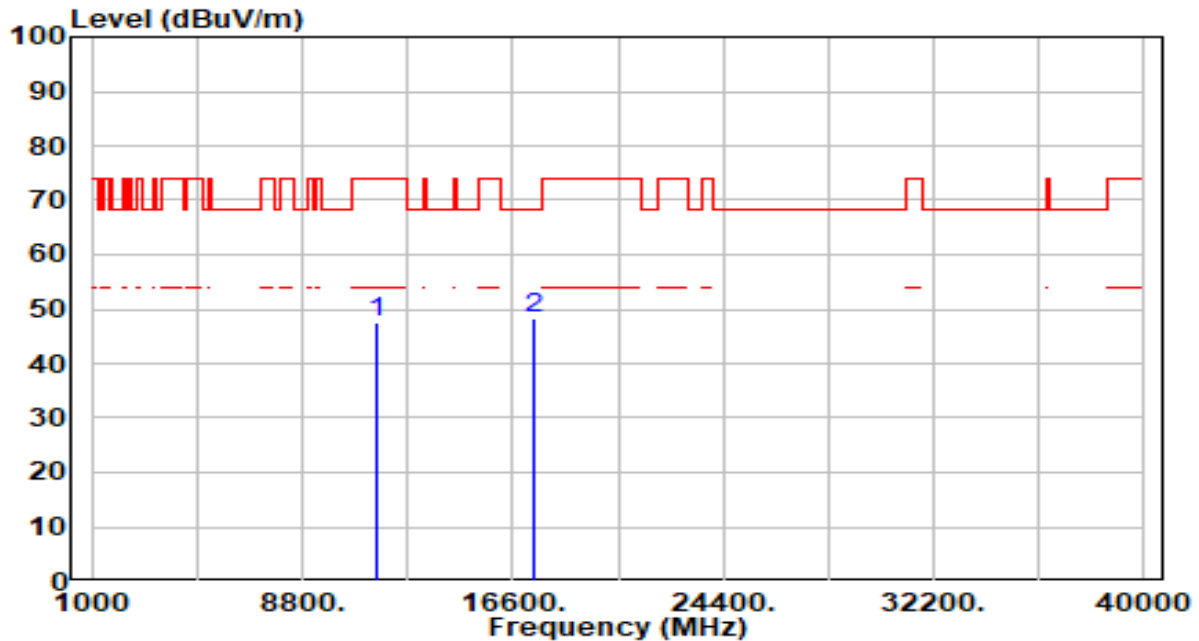


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11570.000	40.27	7.22	47.49	-26.51	74.00	100	54	Peak
2	* 17355.000	41.14	7.35	48.49	-19.71	68.20	100	164	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band4_CH 165_ANT 6+7	Test Voltage	By Notebook PC

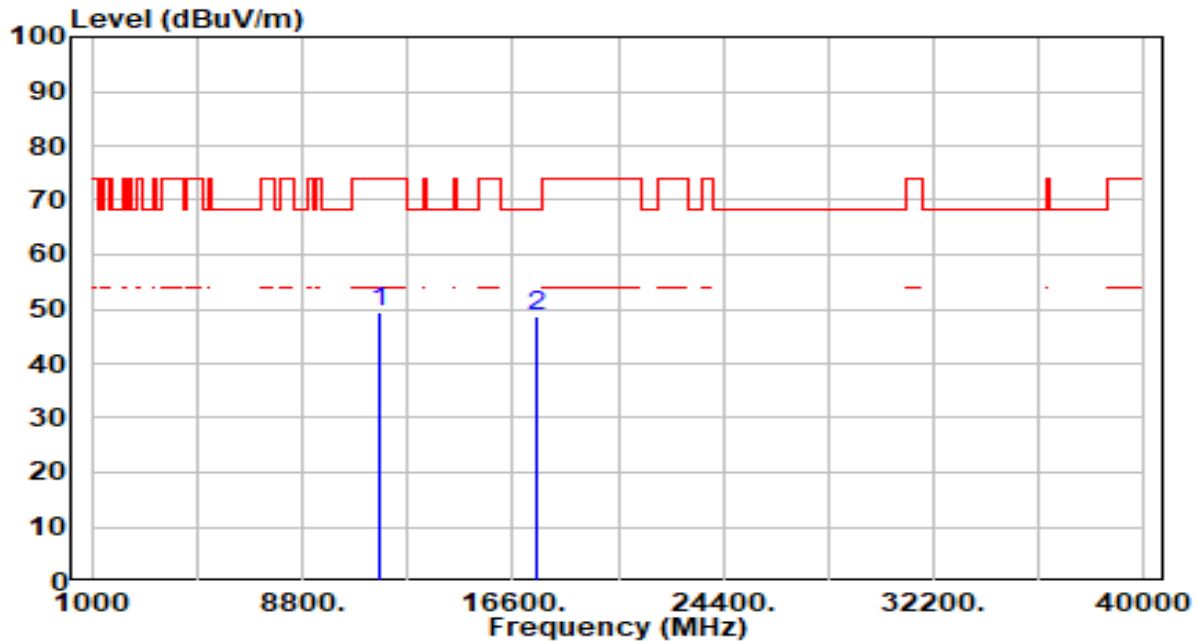


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11650.000	42.07	7.22	49.29	-24.71	74.00	100	156	Peak
2	* 17475.000	41.28	7.41	48.69	-19.51	68.20	100	315	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band4_CH 165_ANT 6+7	Test Voltage	By Notebook PC

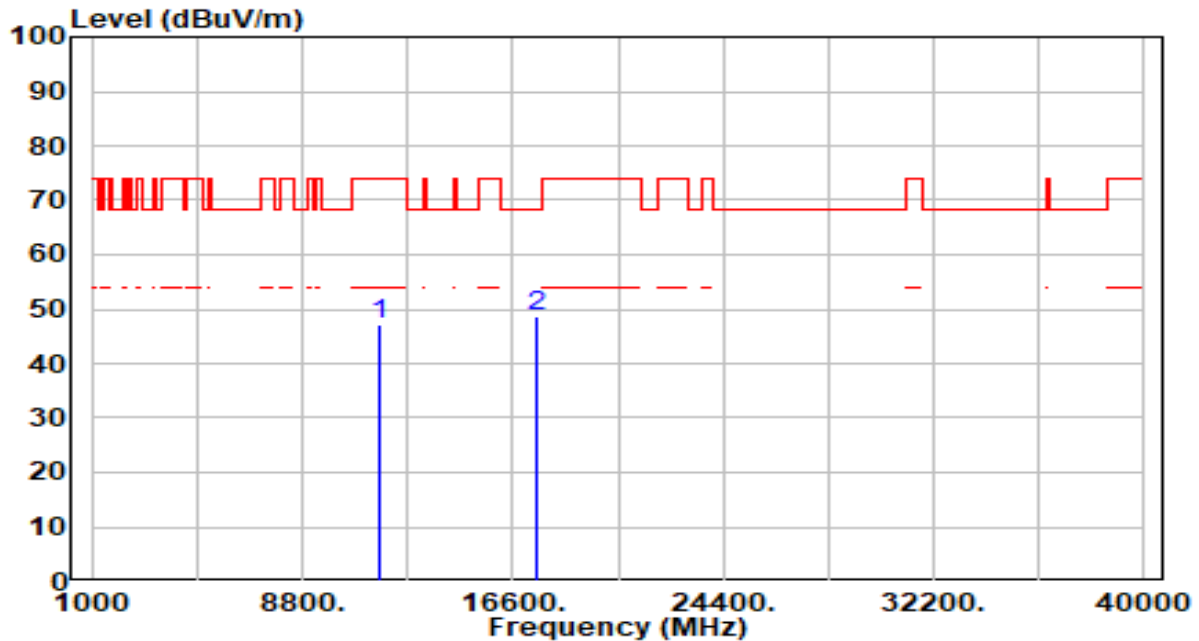


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11650.000	39.94	7.22	47.16	-26.84	74.00	100	210	Peak
2	* 17475.000	41.22	7.41	48.63	-19.57	68.20	100	114	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band1_CH 38_ANT 6+7	Test Voltage	By Notebook PC

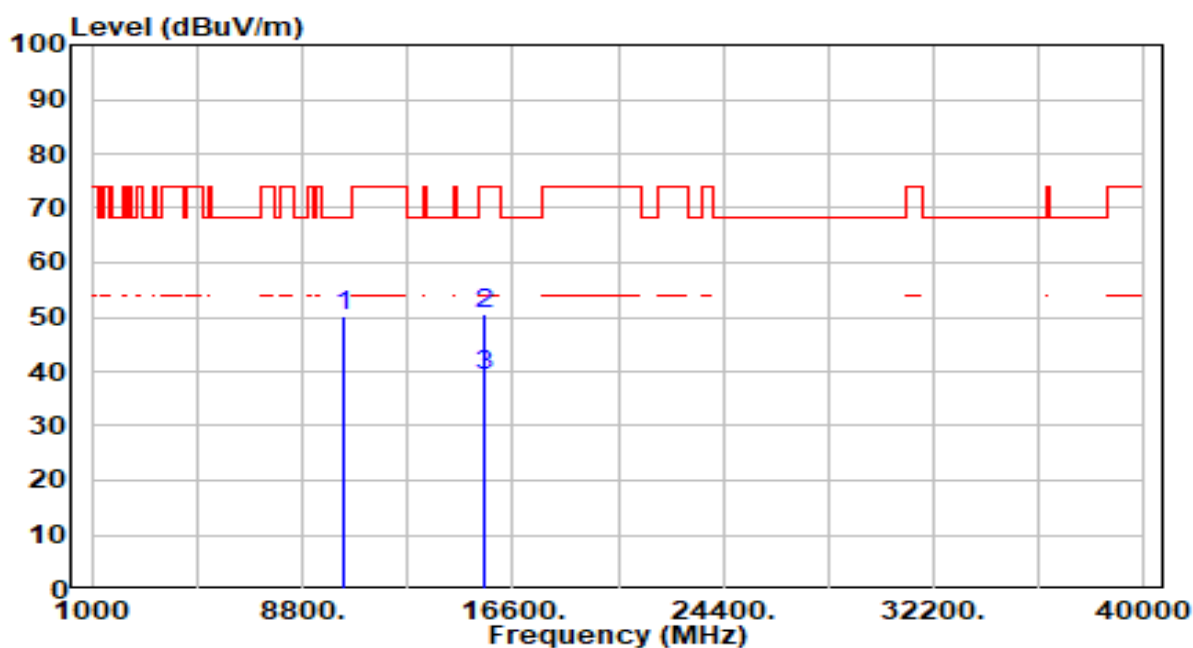


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10380.000	43.18	6.83	50.01	-18.19	68.20	100	193	Peak
2		15570.000	41.81	8.66	50.47	-23.53	74.00	100	178	Peak
3	*	15570.000	30.62	8.66	39.28	-14.72	54.00	100	178	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band1_CH 38_ANT 6+7	Test Voltage	By Notebook PC

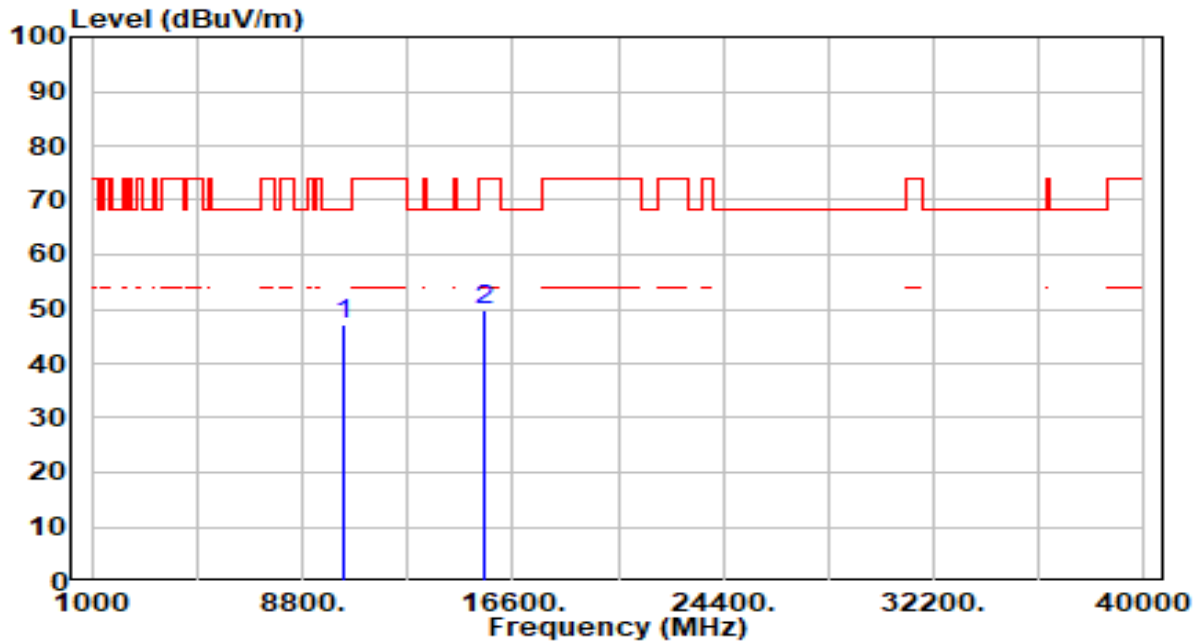


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10380.000	40.50	6.83	47.33	-20.87	68.20	100	13	Peak
2		15570.000	40.99	8.66	49.64	-24.36	74.00	100	2	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band1_CH 46_ANT 6+7	Test Voltage	By Notebook PC

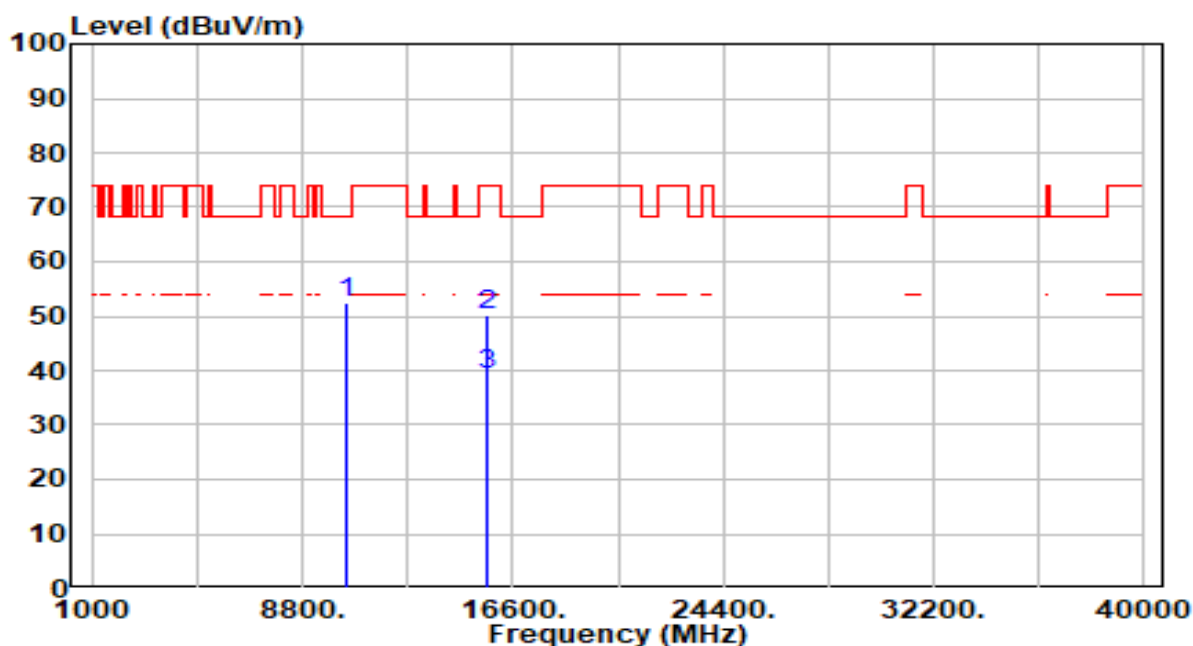


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10460.000	45.58	6.76	52.33	-15.87	68.20	100	223	Peak
2		15690.000	41.20	8.84	50.04	-23.96	74.00	100	3	Peak
3	*	15690.000	30.43	8.84	39.27	-14.73	54.00	100	3	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band1_CH 46_ANT 6+7	Test Voltage	By Notebook PC

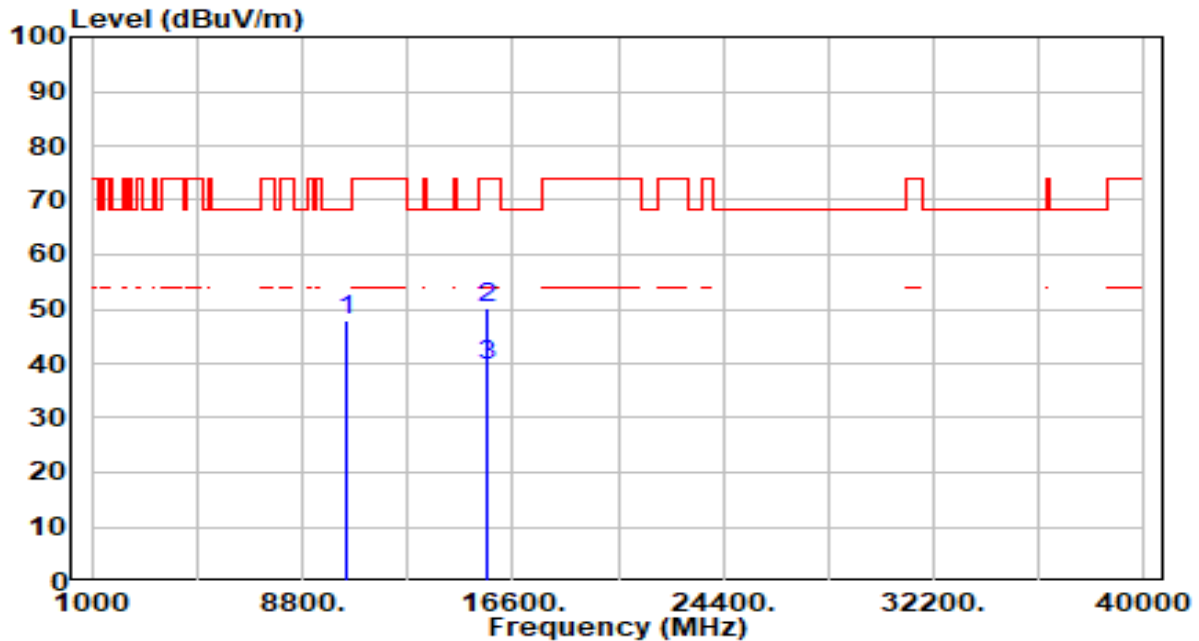


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10460.000	41.10	6.76	47.85	-20.35	68.20	100	201	Peak
2		15690.000	41.41	8.84	50.25	-23.75	74.00	100	256	Peak
3	*	15690.000	30.76	8.84	39.60	-14.40	54.00	100	256	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band2_CH 54_ANT 6+7	Test Voltage	By Notebook PC

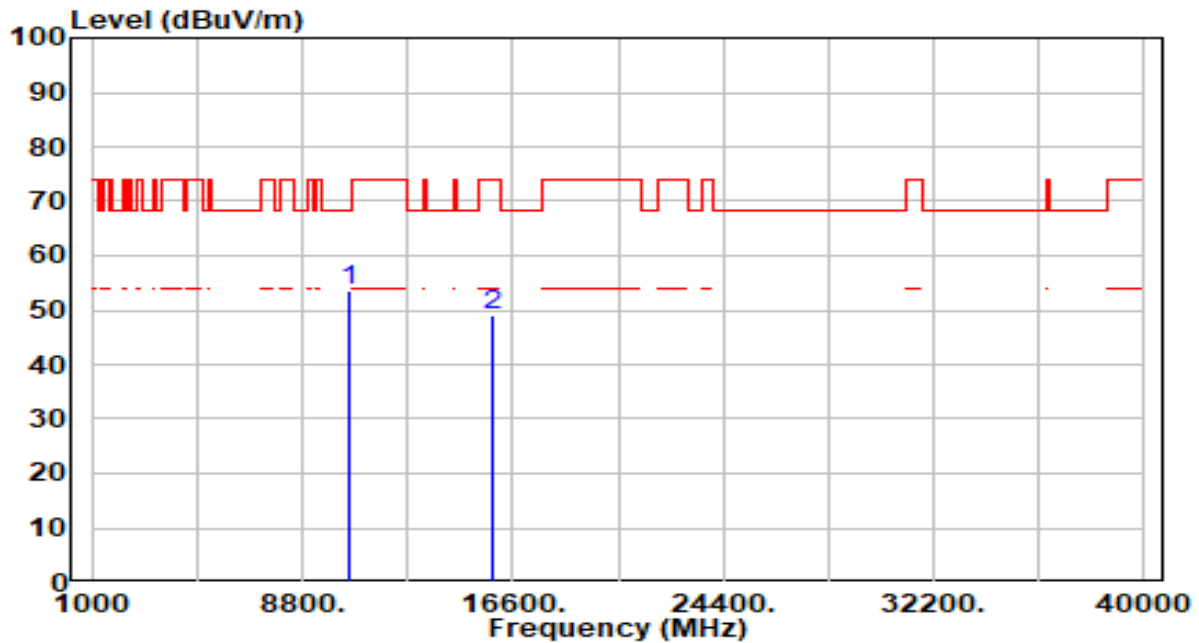


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10540.000	47.01	6.68	53.68	-14.52	68.20	100	234	Peak
2		15810.000	40.17	9.05	49.22	-24.78	74.00	100	257	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band2_CH 54_ANT 6+7	Test Voltage	By Notebook PC

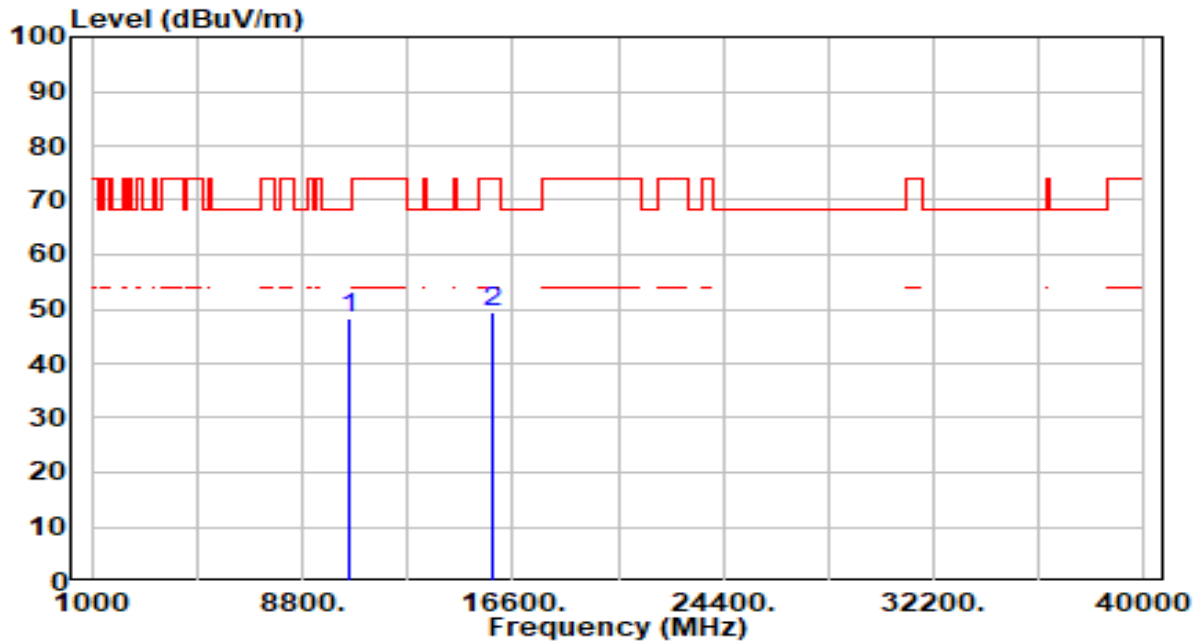


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10540.000	41.76	6.68	48.43	-19.77	68.20	100	329	Peak
2		15810.000	40.36	9.05	49.41	-24.59	74.00	100	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band2_CH 62_ANT 6+7	Test Voltage	By Notebook PC

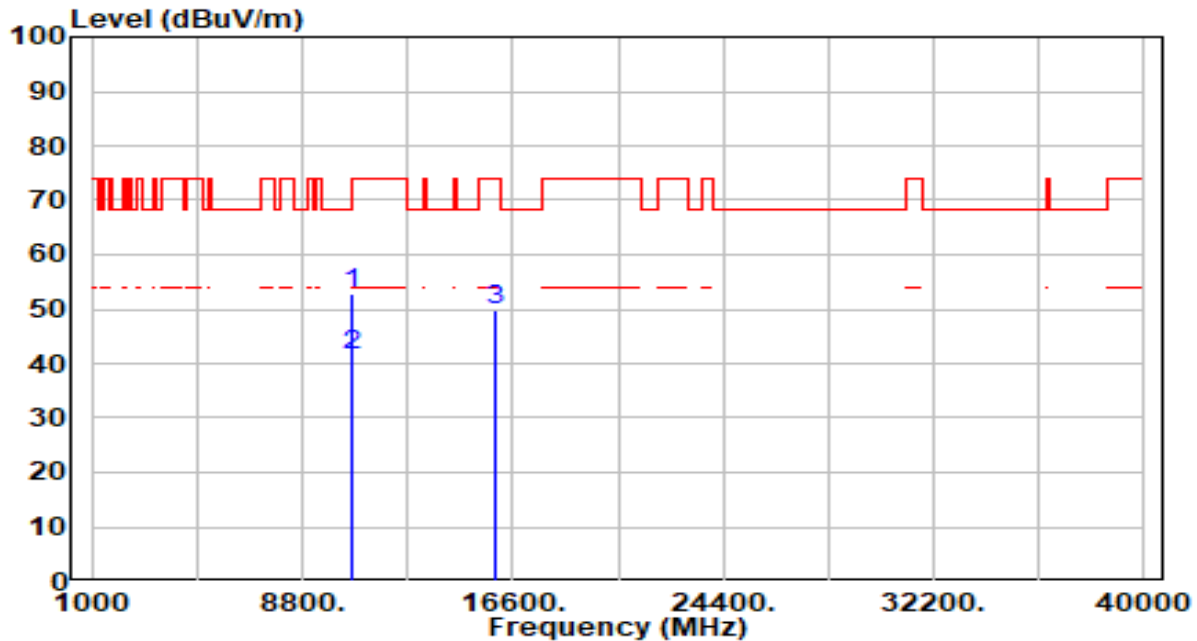


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10620.000	46.07	6.62	52.69	-21.31	74.00	100	208	Peak
2	*	10620.000	34.92	6.62	41.54	-12.46	54.00	100	208	Average
3		15930.000	40.68	9.14	49.83	-24.17	74.00	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band2_CH 62_ANT 6+7	Test Voltage	By Notebook PC

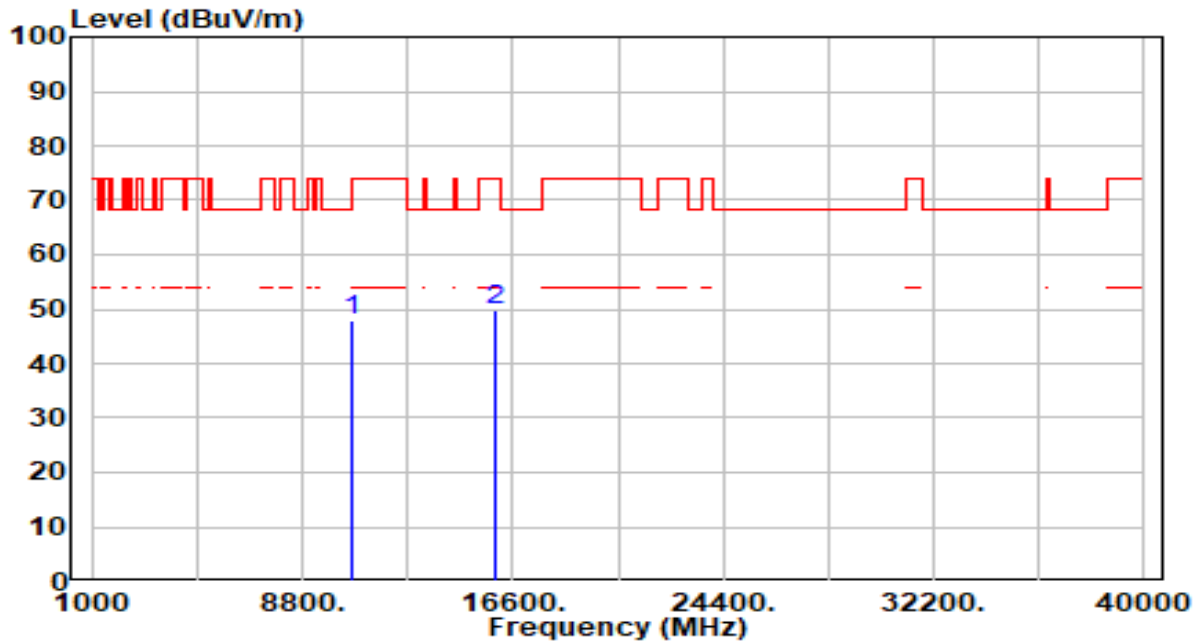


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10620.000	41.30	6.62	47.92	-26.08	74.00	100	314	Peak
2	* 15930.000	40.84	9.14	49.98	-24.02	74.00	100	227	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band3_CH 102_ANT 6+7	Test Voltage	By Notebook PC

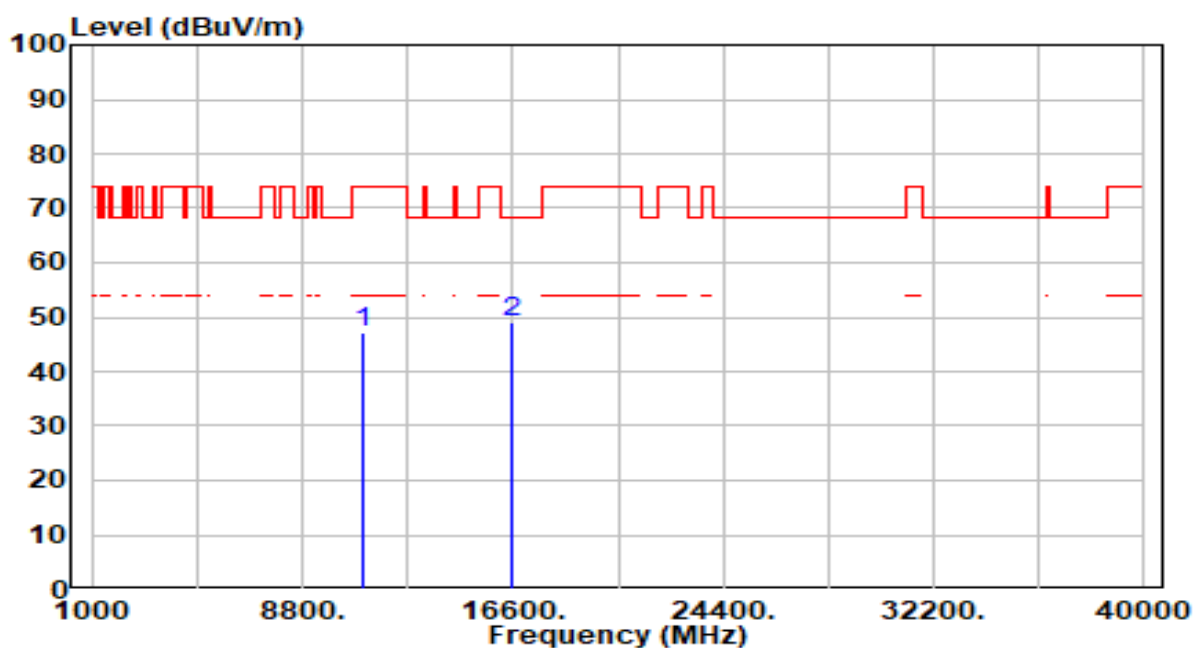


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11020.000	40.89	6.45	47.33	-26.67	74.00	100	211	Peak
2	*	16530.000	40.25	8.72	48.97	-19.23	68.20	100	310	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band3_CH 102_ANT 6+7	Test Voltage	By Notebook PC

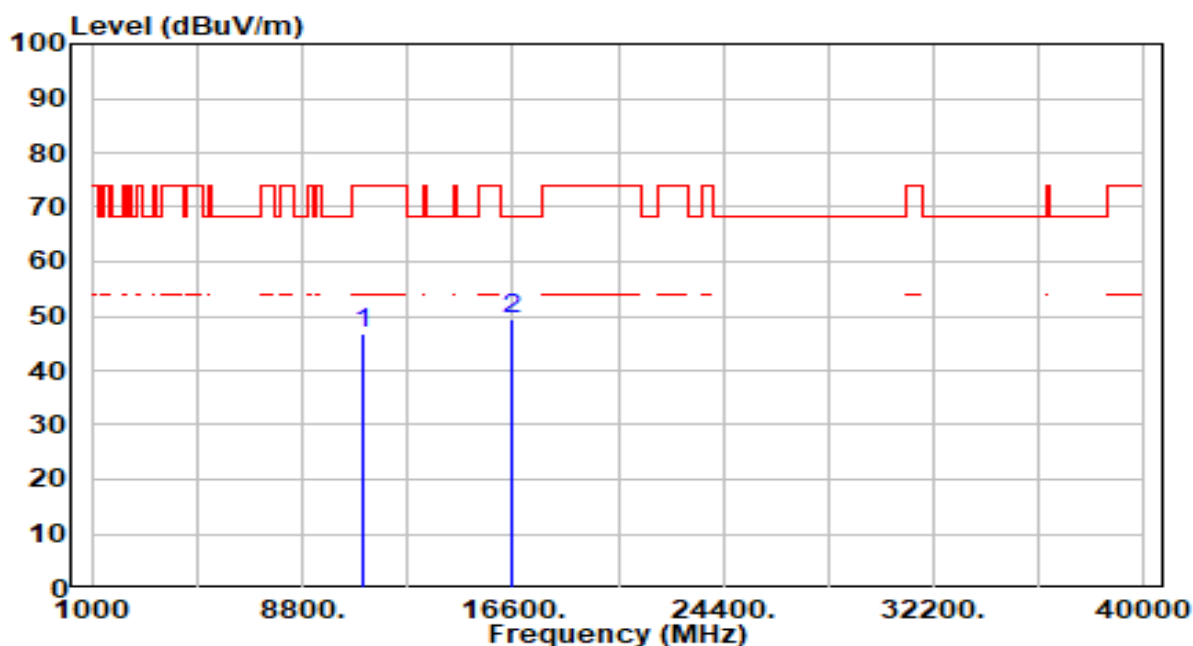


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11020.000	40.29	6.45	46.74	-27.26	74.00	100	13	Peak
2	* 16530.000	40.82	8.72	49.54	-18.66	68.20	100	45	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band3_CH 110_ANT 6+7	Test Voltage	By Notebook PC

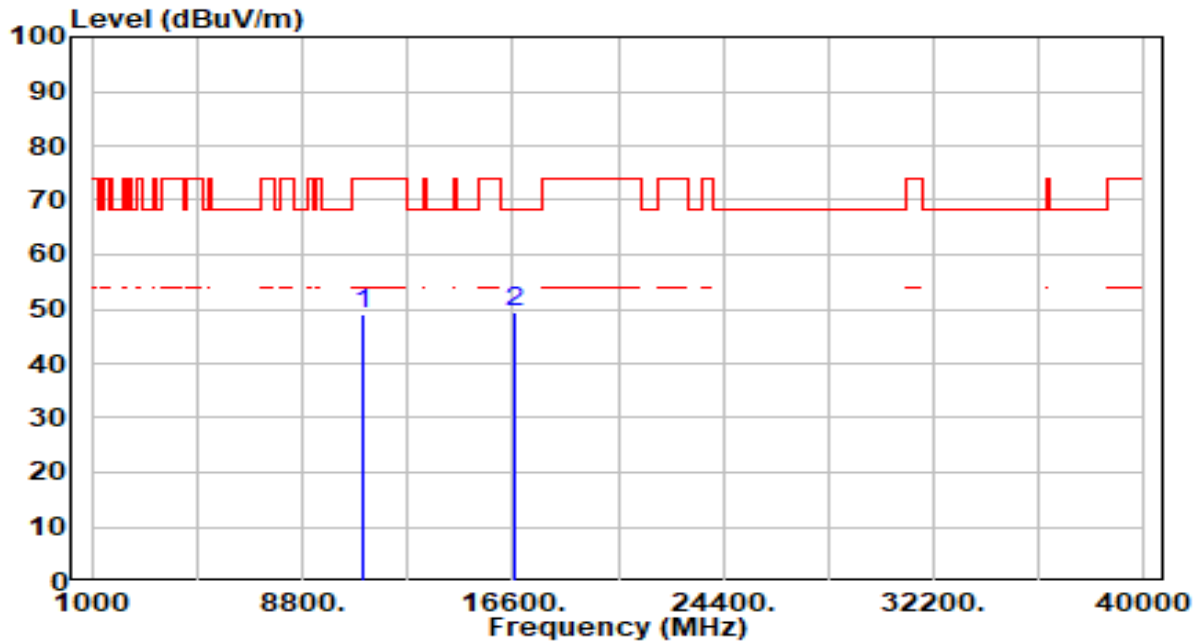


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11100.000	42.31	6.63	48.93	-25.07	74.00	100	119	Peak
2	* 16650.000	40.72	8.69	49.41	-18.79	68.20	100	113	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band3_CH 110_ANT 6+7	Test Voltage	By Notebook PC

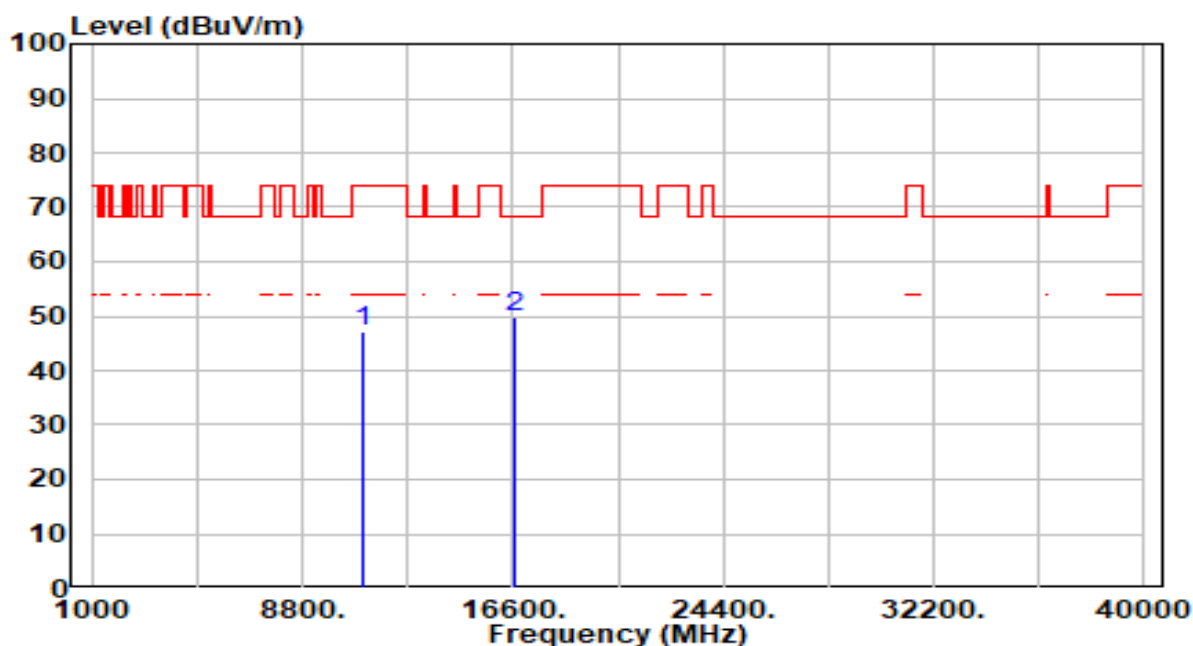


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11100.000	40.68	6.63	47.30	-26.70	74.00	100	273	Peak
2	* 16650.000	41.06	8.69	49.75	-18.45	68.20	100	0	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band3_CH 134_ANT 6+7	Test Voltage	By Notebook PC

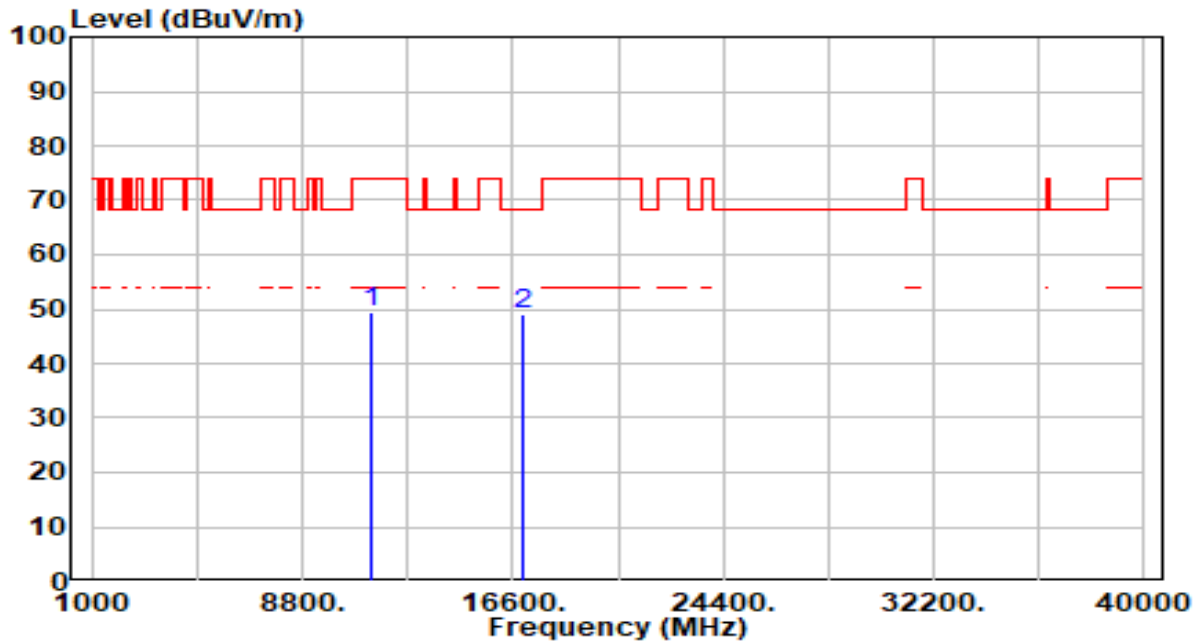


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11340.000	42.39	7.13	49.52	-24.48	74.00	100	209	Peak
2	* 17010.000	40.49	8.44	48.92	-19.28	68.20	100	325	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band3_CH 134_ANT 6+7	Test Voltage	By Notebook PC

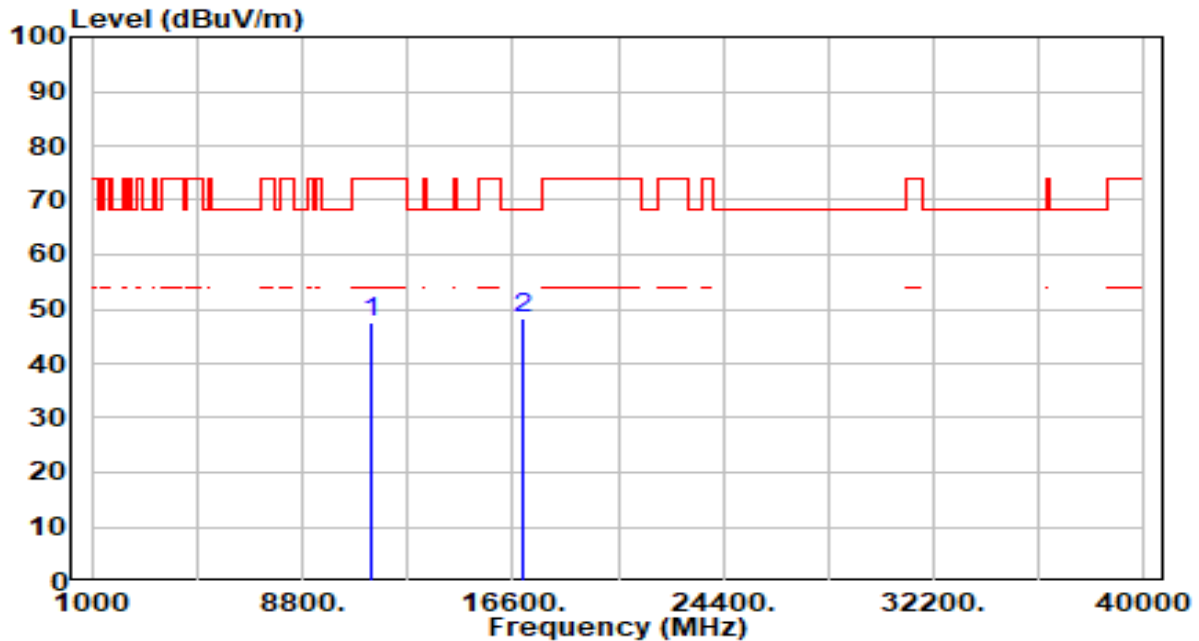


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11340.000	40.54	7.13	47.67	-26.33	74.00	100	360	Peak
2	* 17010.000	39.97	8.44	48.40	-19.80	68.20	100	0	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band3_CH 142_ANT 6+7	Test Voltage	By Notebook PC

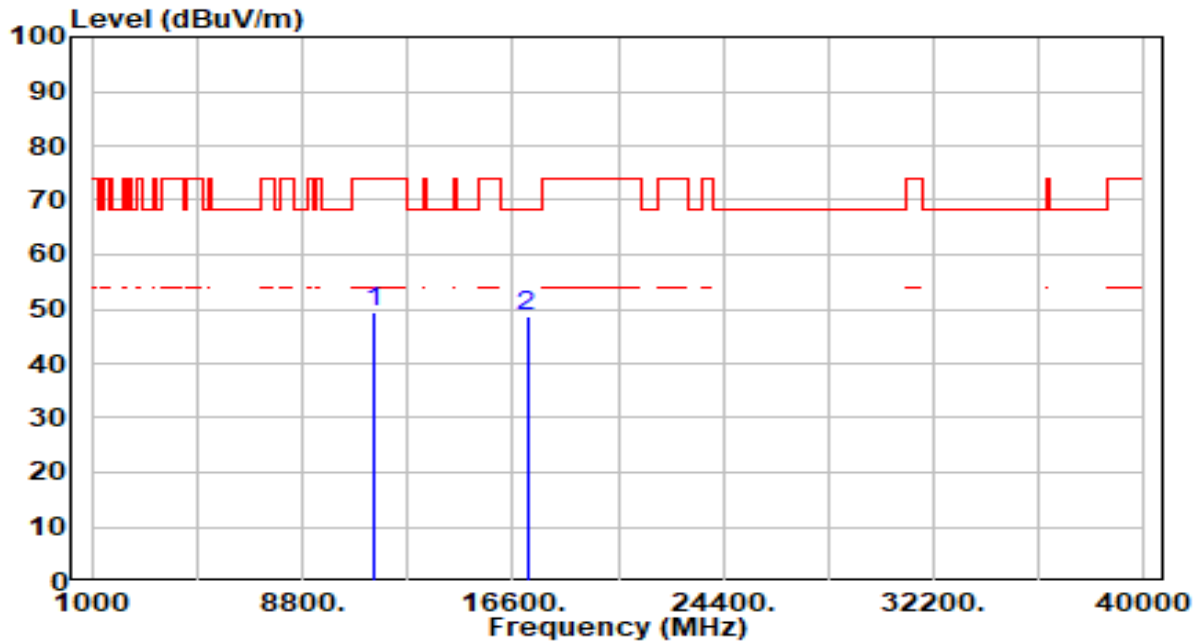


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11420.000	42.22	7.21	49.43	-24.57	74.00	100	177	Peak
2	* 17130.000	40.44	8.15	48.60	-19.60	68.20	100	169	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band3_CH 142_ANT 6+7	Test Voltage	By Notebook PC

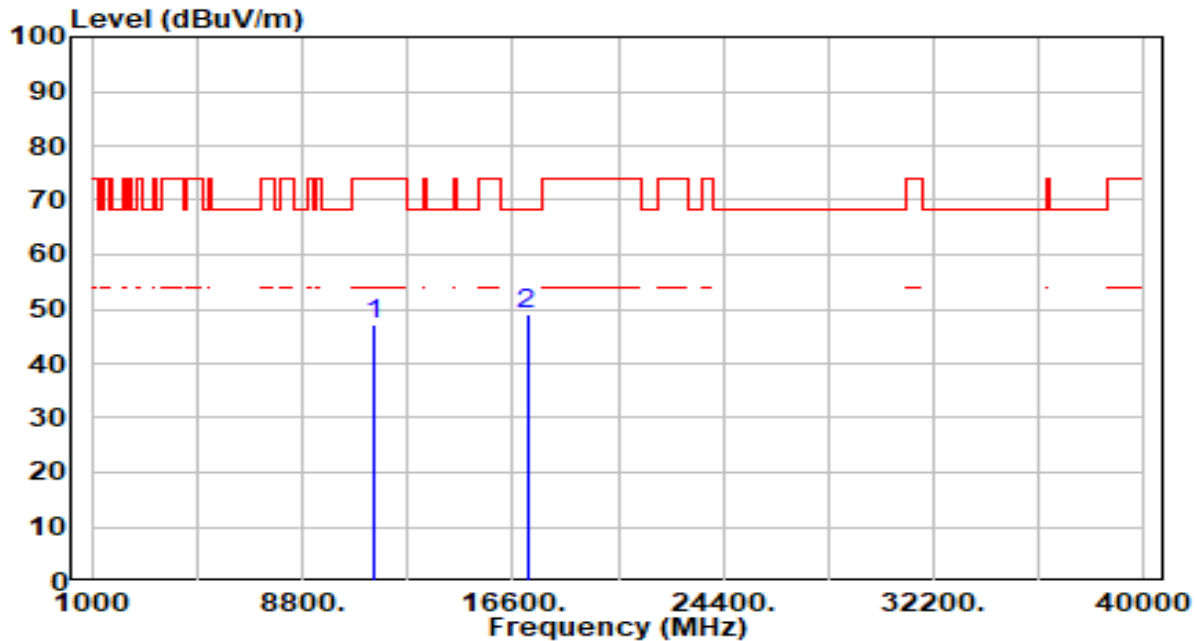


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11420.000	39.78	7.21	46.99	-27.01	74.00	100	178	Peak
2	* 17130.000	40.81	8.15	48.97	-19.23	68.20	100	65	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band4_CH 151_ANT 6+7	Test Voltage	By Notebook PC

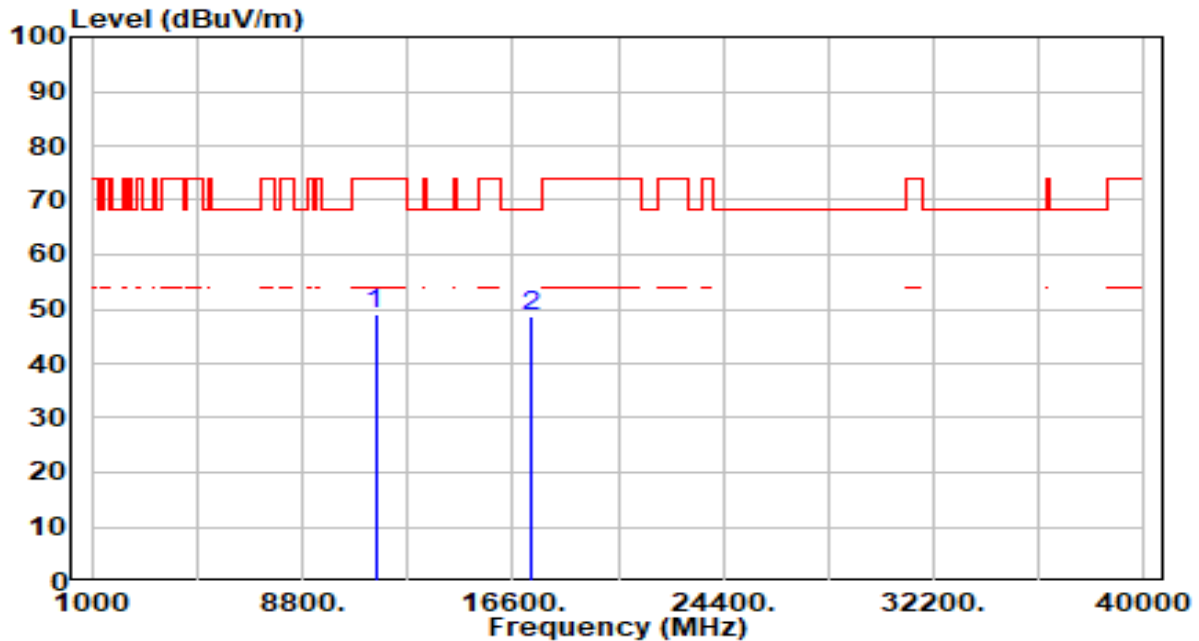


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11510.000	41.79	7.19	48.97	-25.03	74.00	100	132	Peak
2	* 17265.000	40.90	7.76	48.66	-19.54	68.20	100	192	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band4_CH 151_ANT 6+7	Test Voltage	By Notebook PC

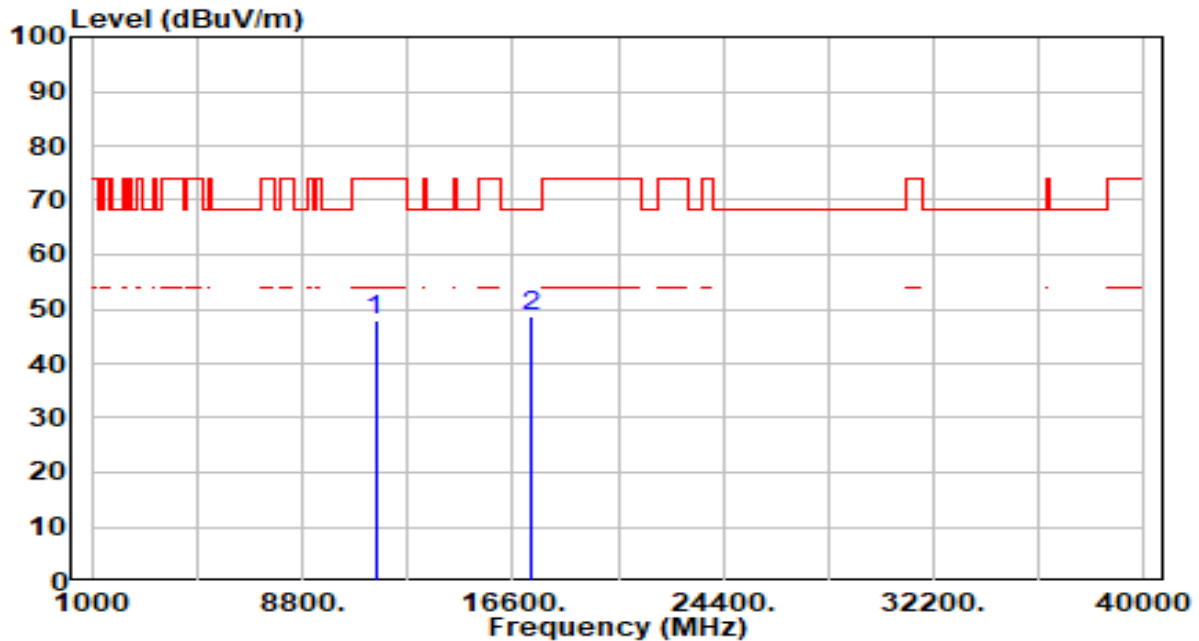


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11510.000	40.71	7.19	47.89	-26.11	74.00	100	361	Peak
2	* 17265.000	40.90	7.76	48.66	-19.54	68.20	100	153	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band4_CH 159_ANT 6+7	Test Voltage	By Notebook PC

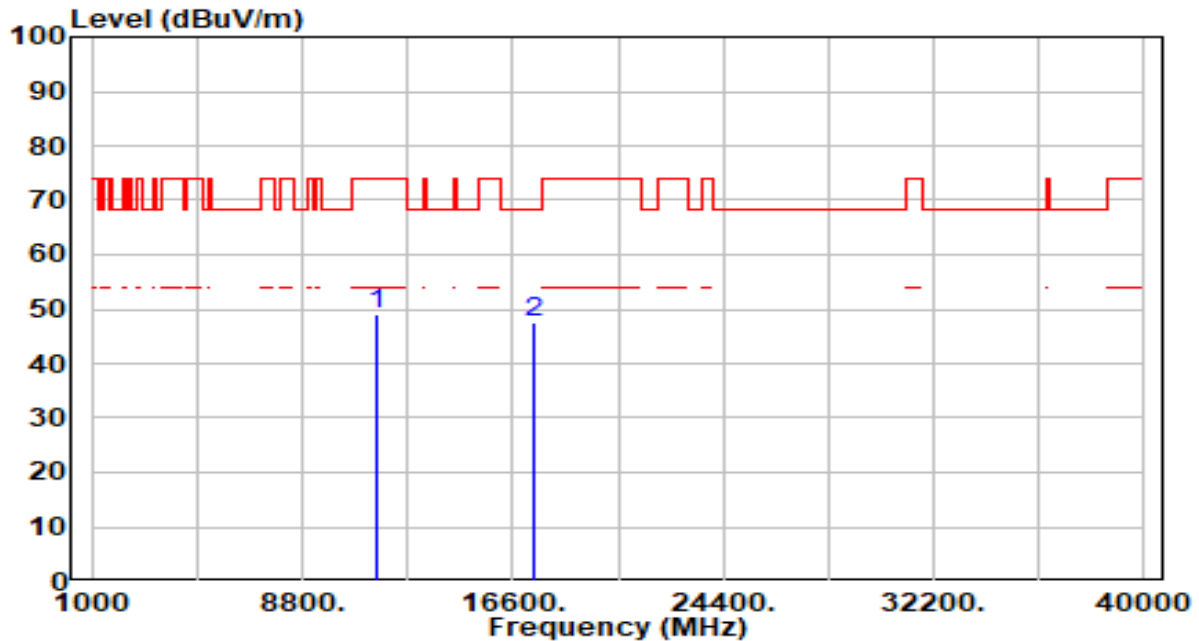


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11590.000	41.81	7.23	49.04	-24.96	74.00	100	133	Peak
2	* 17385.000	40.34	7.20	47.53	-20.67	68.20	100	156	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band4_CH 159_ANT 6+7	Test Voltage	By Notebook PC

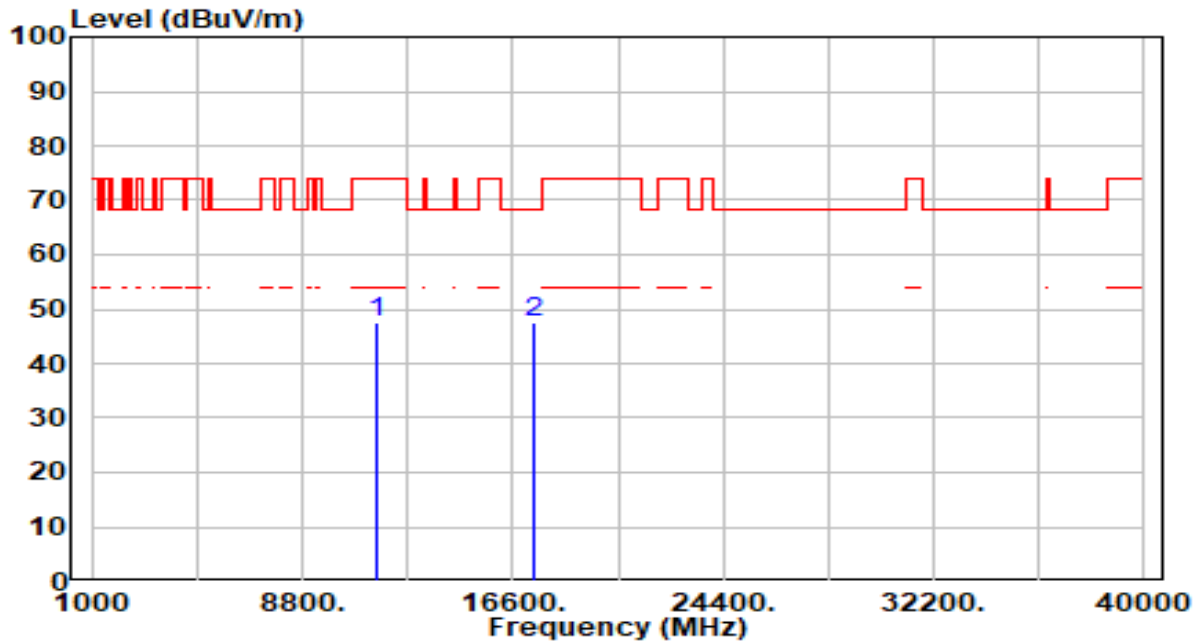


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11590.000	40.14	7.23	47.36	-26.64	74.00	100	64	Peak
2	* 17385.000	40.49	7.20	47.69	-20.51	68.20	100	343	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_TX_Band1_CH 42_ANT 6+7	Test Voltage	By Notebook PC

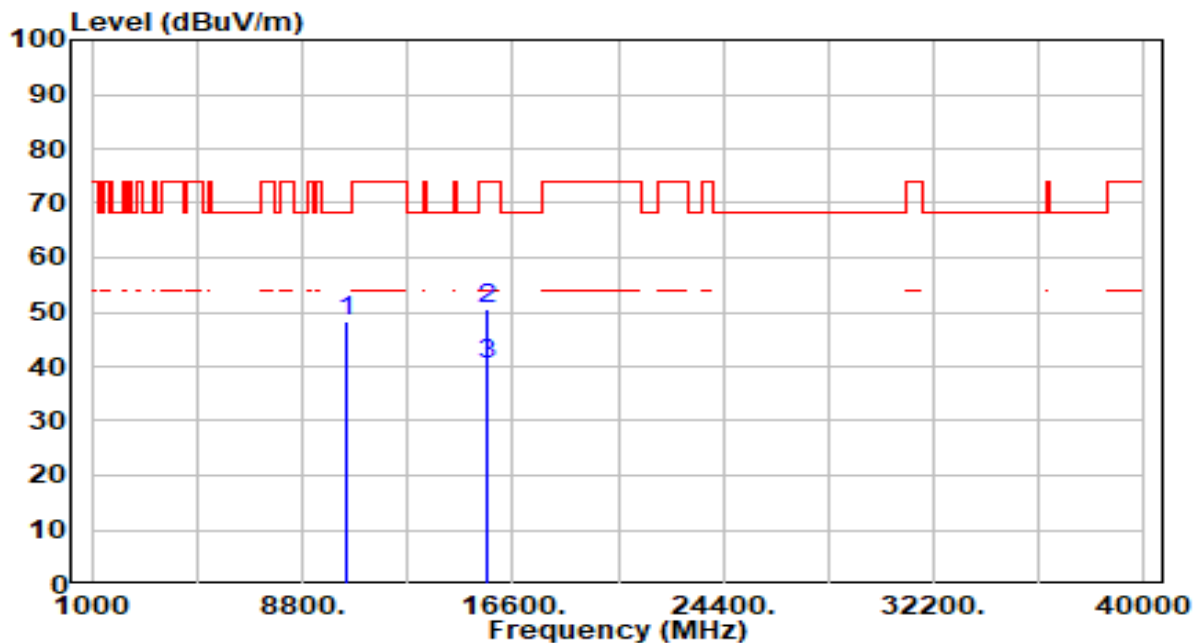


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10420.000	41.65	6.80	48.44	-19.76	68.20	100	257	Peak
2		15630.000	42.02	8.69	50.71	-23.29	74.00	100	260	Peak
3	*	15630.000	31.85	8.69	40.54	-13.46	54.00	100	260	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_TX_Band1_CH 42_ANT 6+7	Test Voltage	By Notebook PC

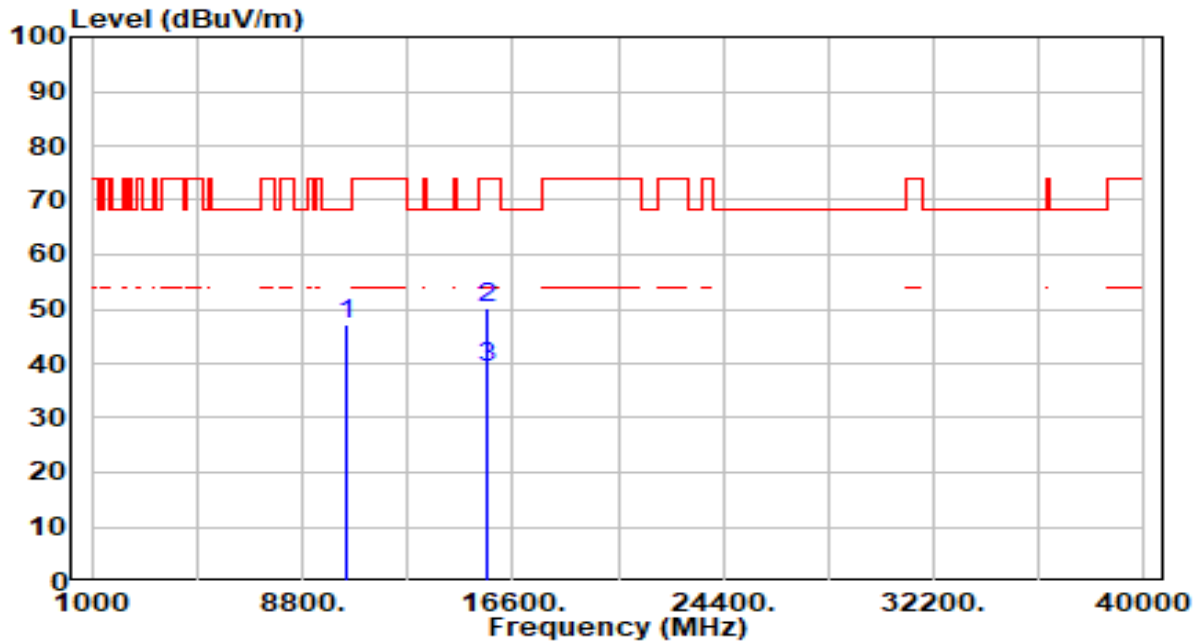


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10420.000	40.44	6.80	47.23	-20.97	68.20	100	96	Peak
2		15630.000	41.48	8.69	50.17	-23.83	74.00	100	184	Peak
3	*	15630.000	30.63	8.69	39.32	-14.68	54.00	100	184	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_TX_Band2_CH 58_ANT 6+7	Test Voltage	By Notebook PC

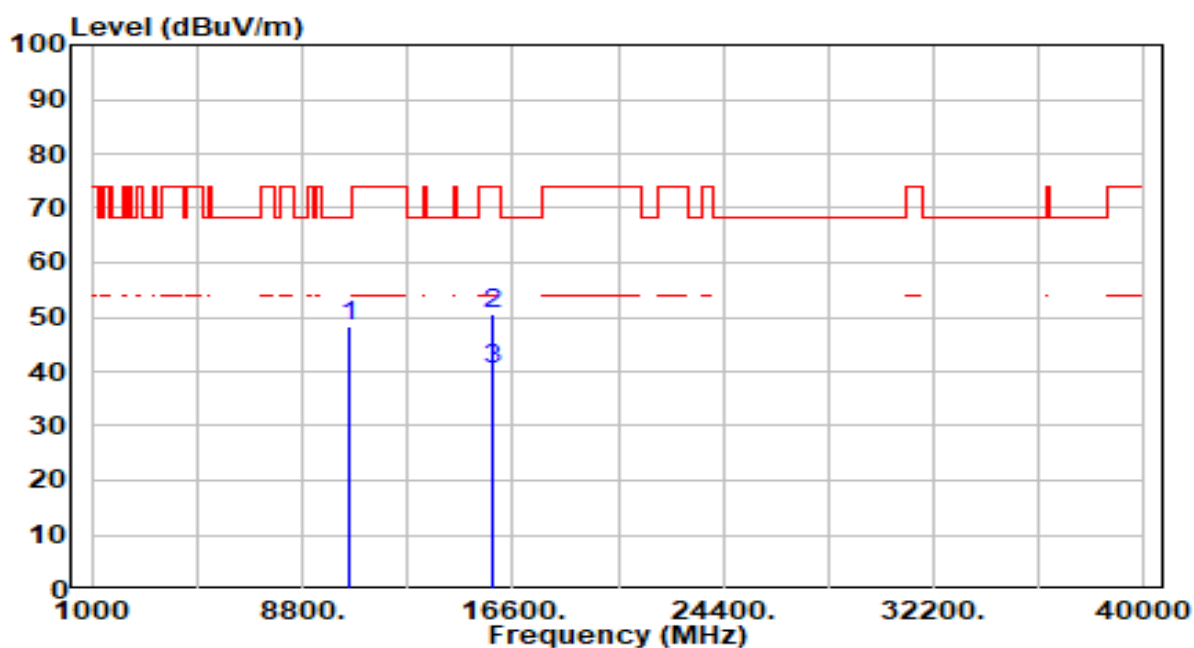


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10580.000	41.51	6.64	48.15	-20.05	68.20	100	192	Peak
2		15870.000	41.55	9.12	50.68	-23.32	74.00	100	342	Peak
3	*	15870.000	31.08	9.12	40.20	-13.80	54.00	100	342	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_TX_Band2_CH 58_ANT 6+7	Test Voltage	By Notebook PC

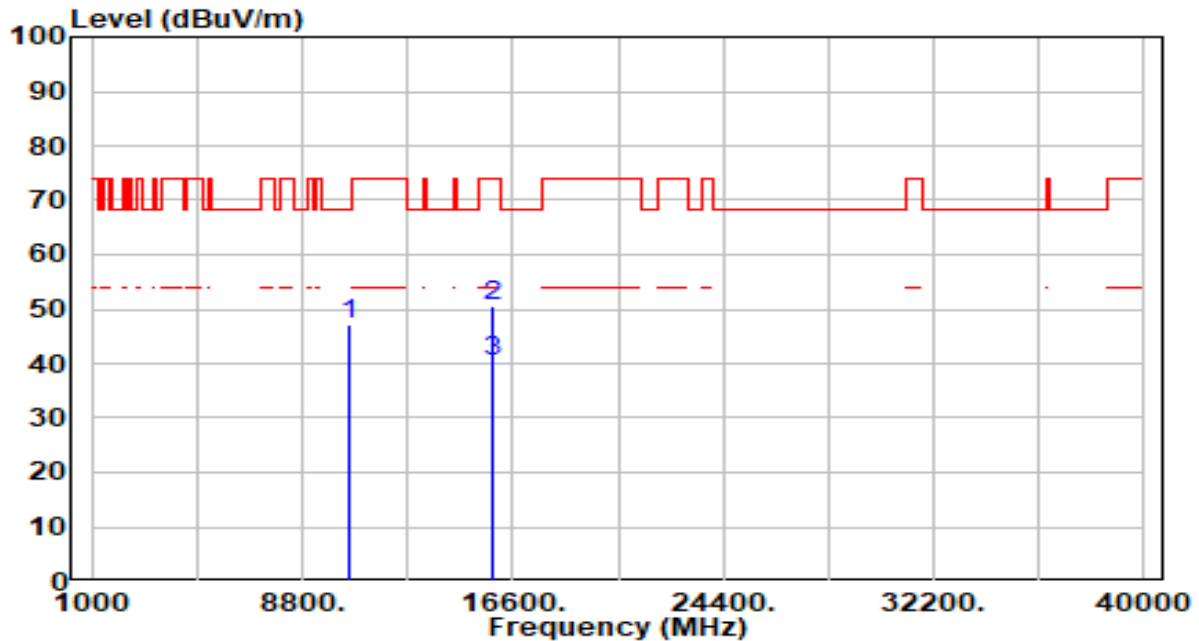


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10580.000	40.65	6.64	47.29	-20.91	68.20	100	108	Peak
2		15870.000	41.45	9.12	50.57	-23.43	74.00	100	253	Peak
3	*	15870.000	31.11	9.12	40.23	-13.77	54.00	100	253	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_TX_Band3_CH 106_ANT 6+7	Test Voltage	By Notebook PC

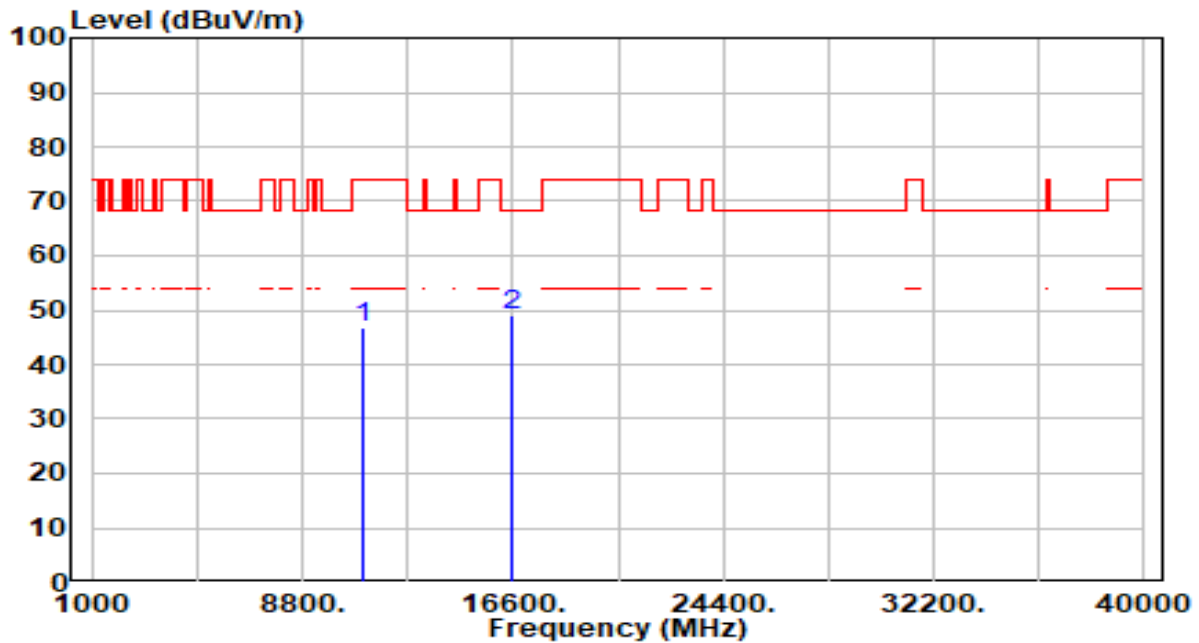


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11060.000	40.15	6.54	46.68	-27.32	74.00	100	190	Peak
2	*	16590.000	40.31	8.68	48.99	-19.21	68.20	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_TX_Band3_CH 106_ANT 6+7	Test Voltage	By Notebook PC

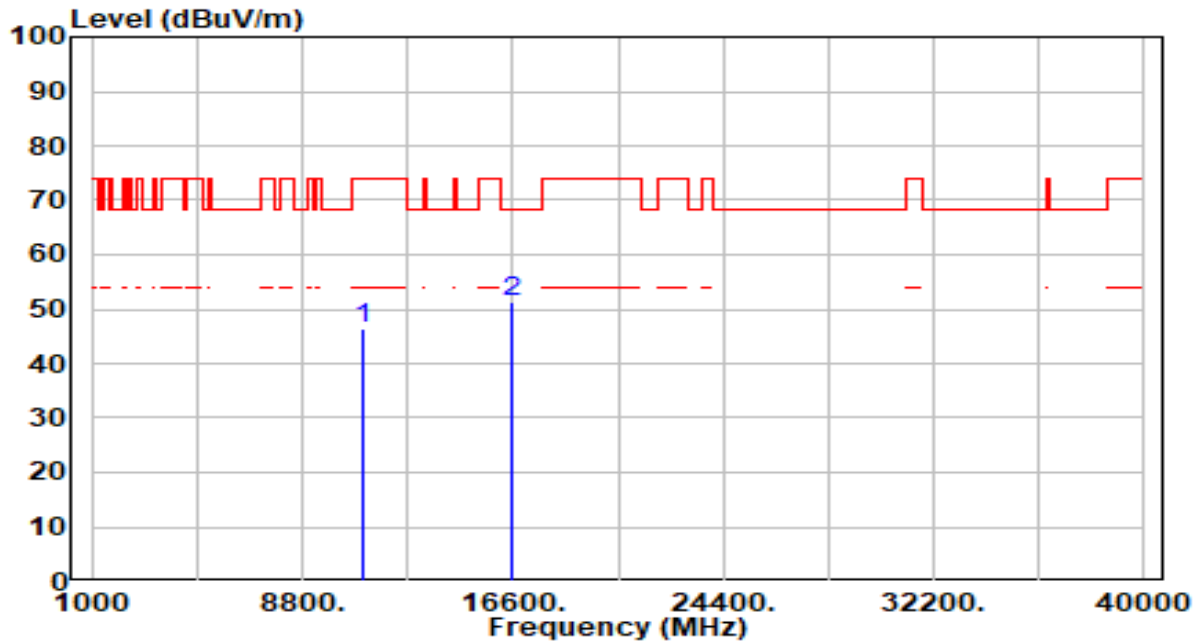


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11060.000	40.03	6.54	46.56	-27.44	74.00	100	337	Peak
2	* 16590.000	42.63	8.68	51.31	-16.89	68.20	100	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_TX_Band3_CH 122_ANT 6+7	Test Voltage	By Notebook PC

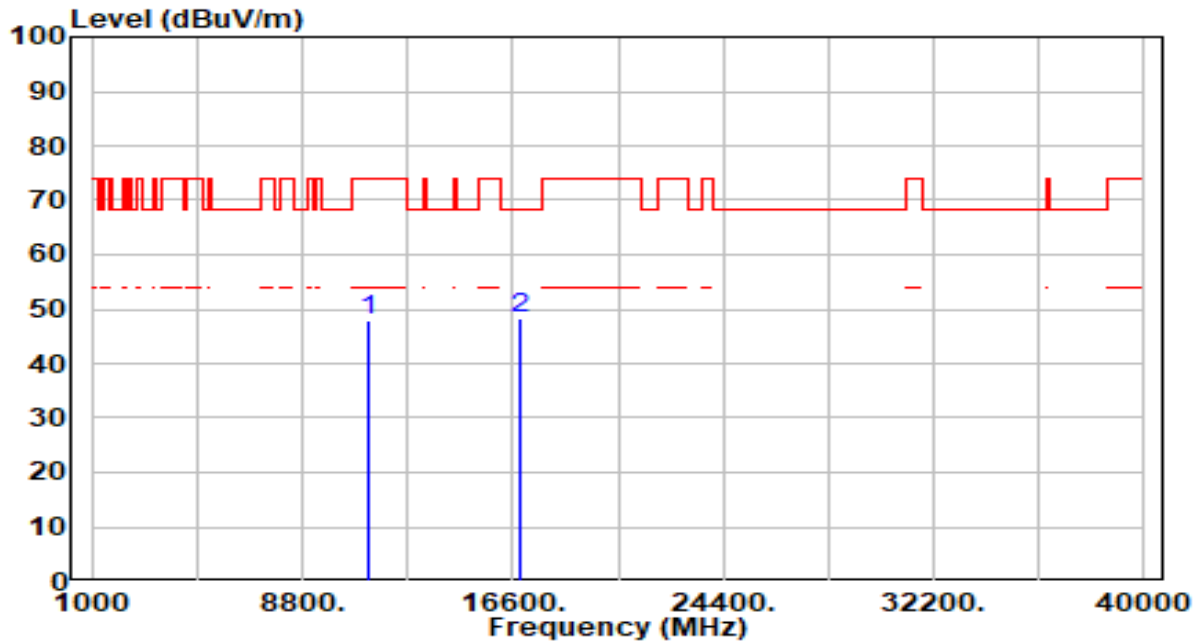


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11220.000	40.90	6.93	47.83	-26.17	74.00	100	198	Peak
2	* 16830.000	39.43	8.70	48.13	-20.07	68.20	100	209	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_TX_Band3_CH 122_ANT 6+7	Test Voltage	By Notebook PC

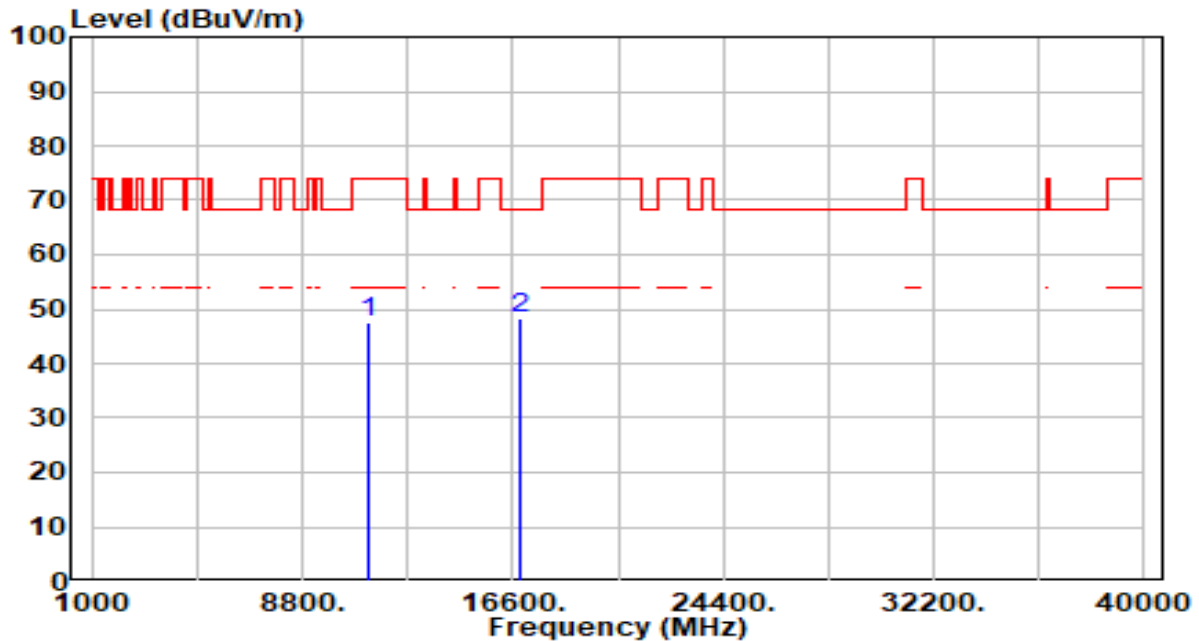


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11220.000	40.45	6.93	47.38	-26.62	74.00	100	186	Peak
2	* 16830.000	39.73	8.70	48.43	-19.77	68.20	100	128	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_TX_Band3_CH 138_ANT 6+7	Test Voltage	By Notebook PC

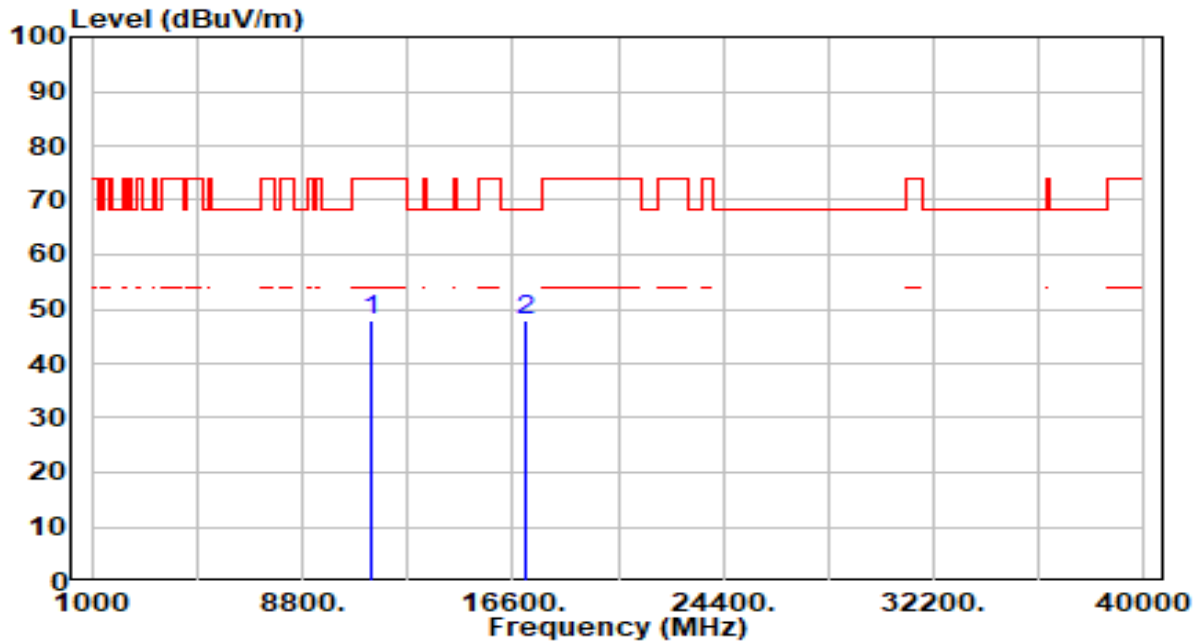


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11380.000	40.90	7.18	48.08	-25.92	74.00	100	145	Peak
2	* 17070.000	39.67	8.29	47.96	-20.24	68.20	100	239	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_TX_Band3_CH 138_ANT 6+7	Test Voltage	By Notebook PC

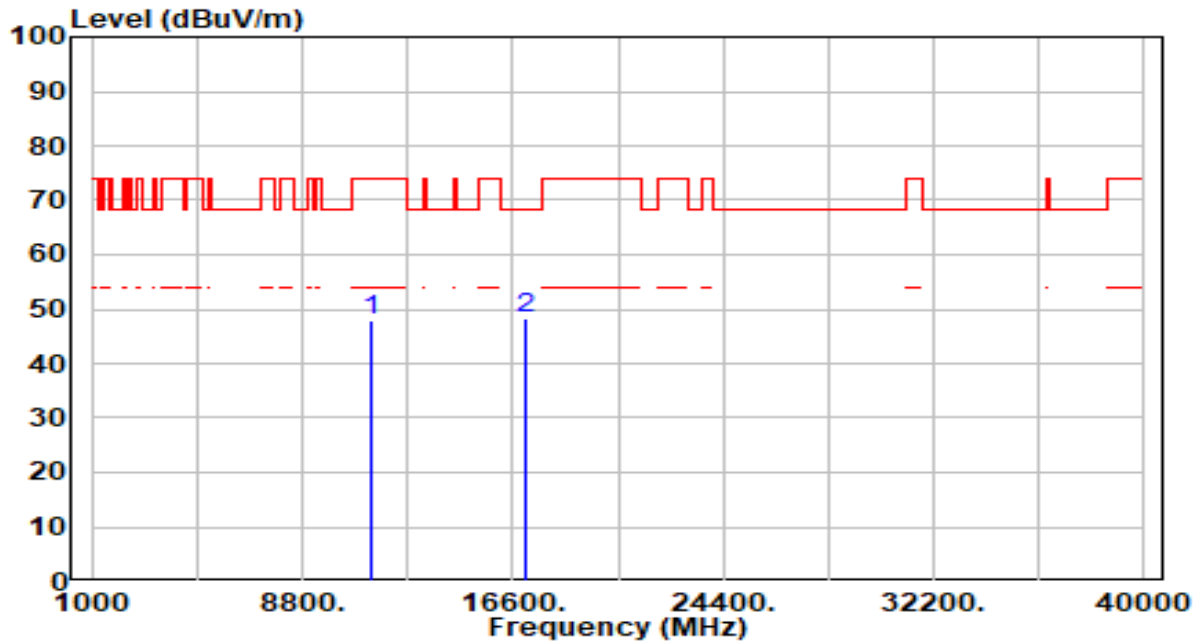


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11380.000	40.79	7.18	47.97	-26.03	74.00	100	13	Peak
2	* 17070.000	39.91	8.29	48.20	-20.00	68.20	100	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_TX_Band4_CH 155_ANT 6+7	Test Voltage	By Notebook PC

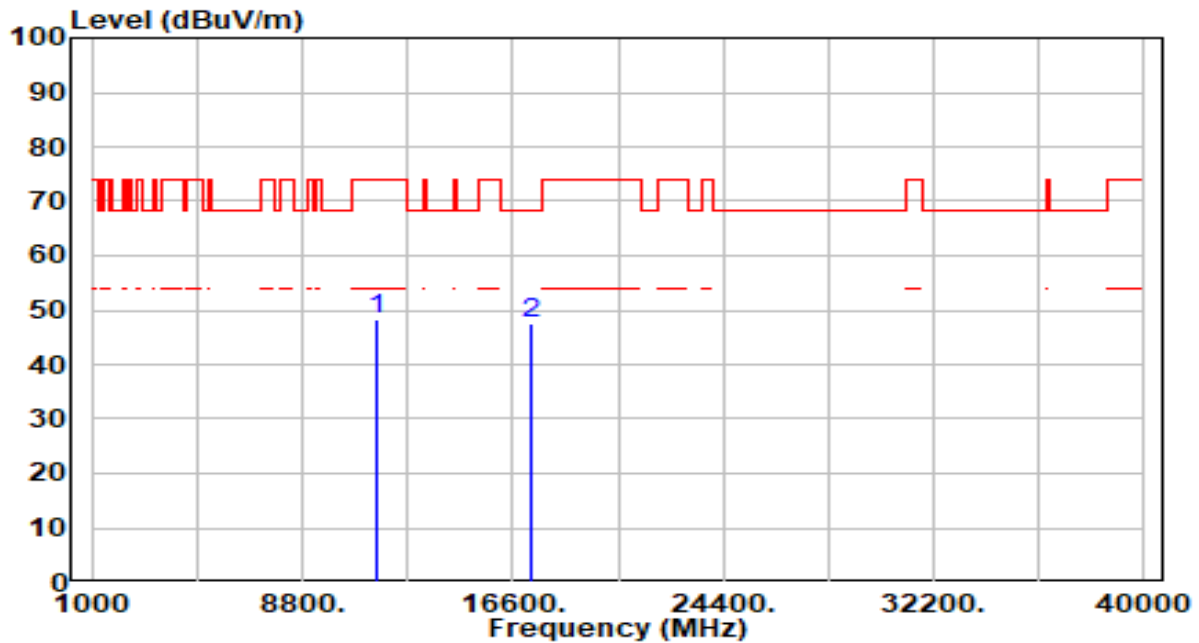


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11550.000	40.92	7.21	48.12	-25.88	74.00	100	110	Peak
2	*	17325.000	39.93	7.50	47.42	-20.78	68.20	100	37	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_TX_Band4_CH 155_ANT 6+7	Test Voltage	By Notebook PC

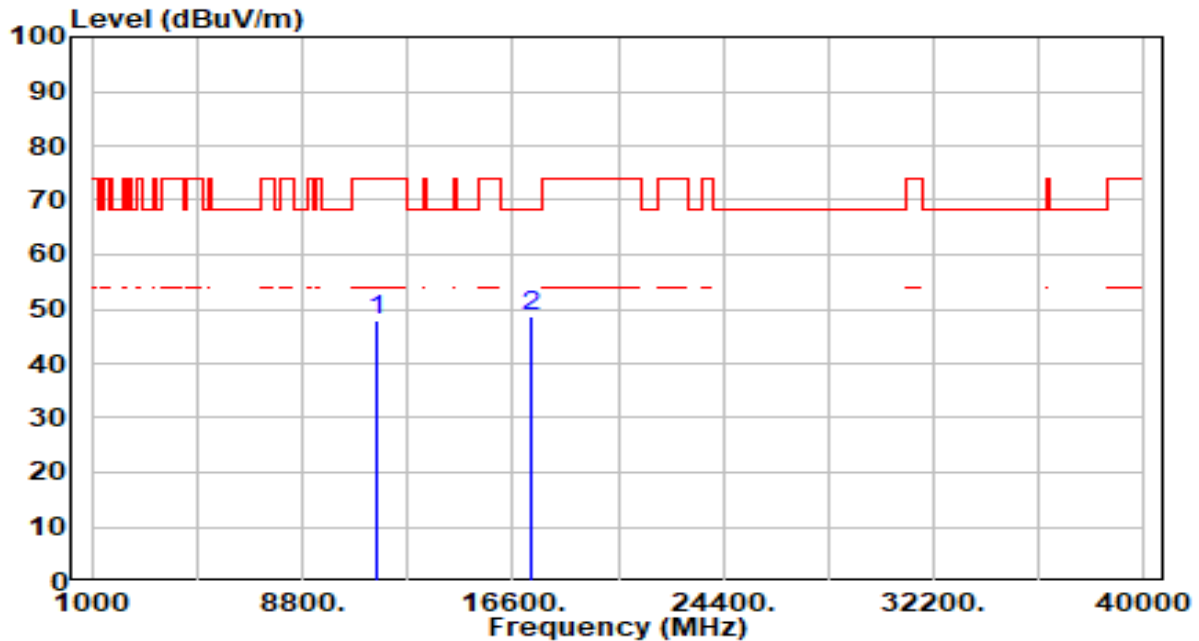


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11550.000	40.58	7.21	47.78	-26.22	74.00	100	360	Peak
2	* 17325.000	41.00	7.50	48.49	-19.71	68.20	100	70	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-160MHz_TX_Band1,2_CH 50_ANT 6+7	Test Voltage	By Notebook PC

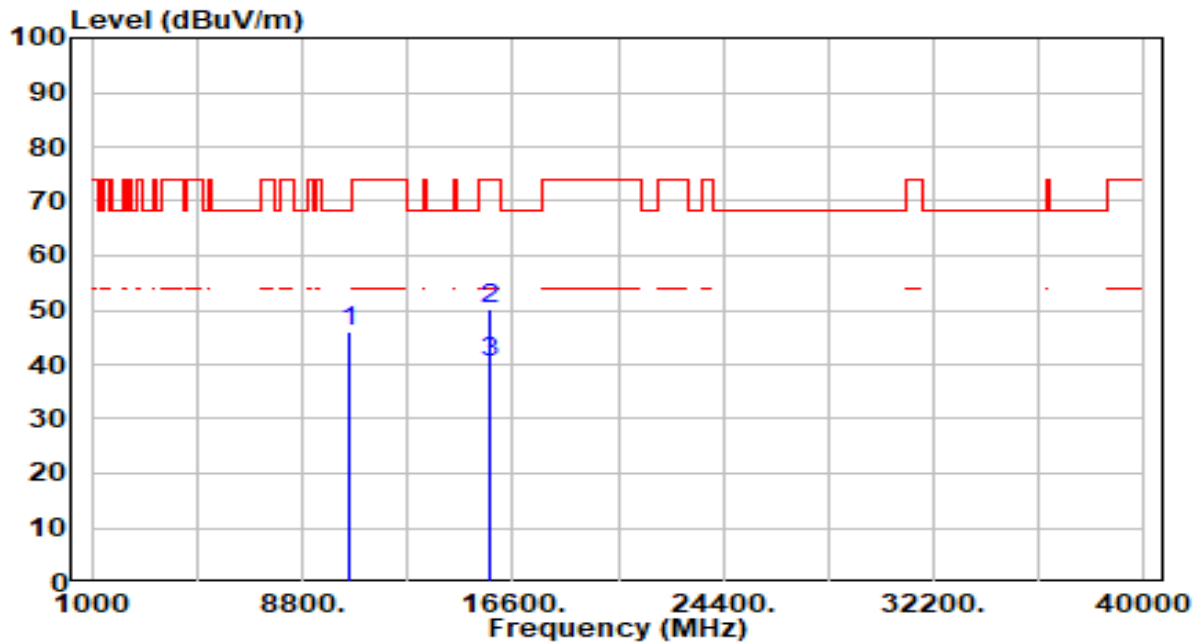


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10500.000	39.43	6.71	46.14	-22.06	68.20	100	150	Peak
2		15750.000	41.41	8.95	50.36	-23.64	74.00	100	319	Peak
3	*	15750.000	31.25	8.95	40.20	-13.80	54.00	100	319	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-160MHz_TX_Band1,2_CH 50_ANT 6+7	Test Voltage	By Notebook PC

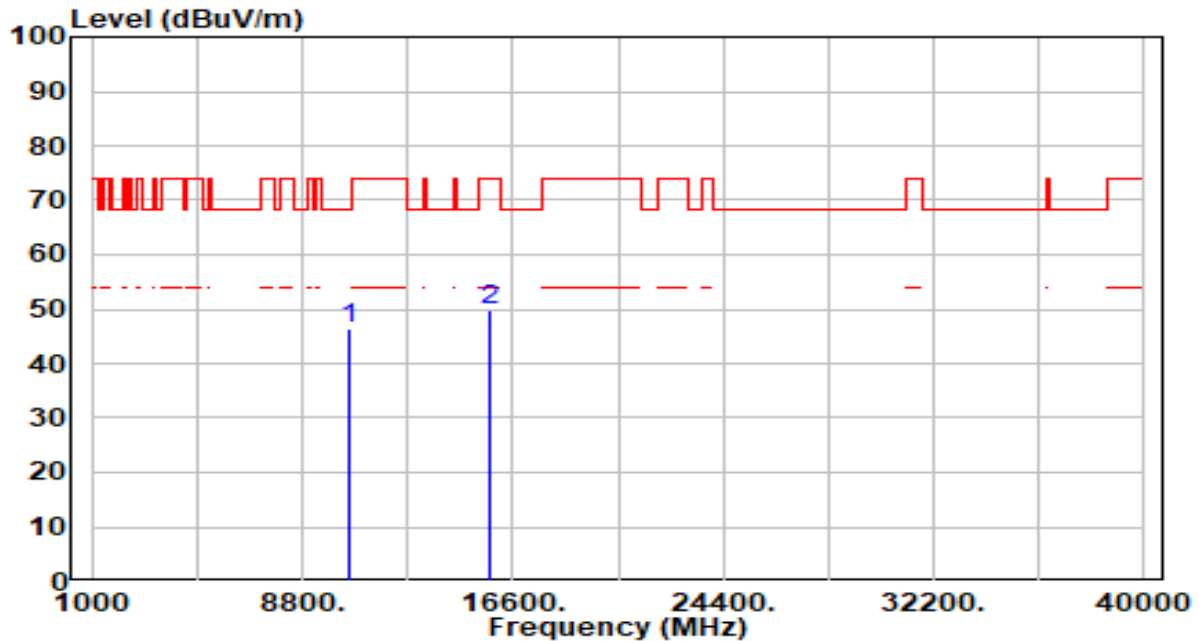


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10500.000	39.67	6.71	46.38	-21.82	68.20	100	33	Peak
2		15750.000	40.95	8.95	49.90	-24.10	74.00	100	311	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-160MHz_TX_Band3_CH 114_ANT 6+7	Test Voltage	By Notebook PC

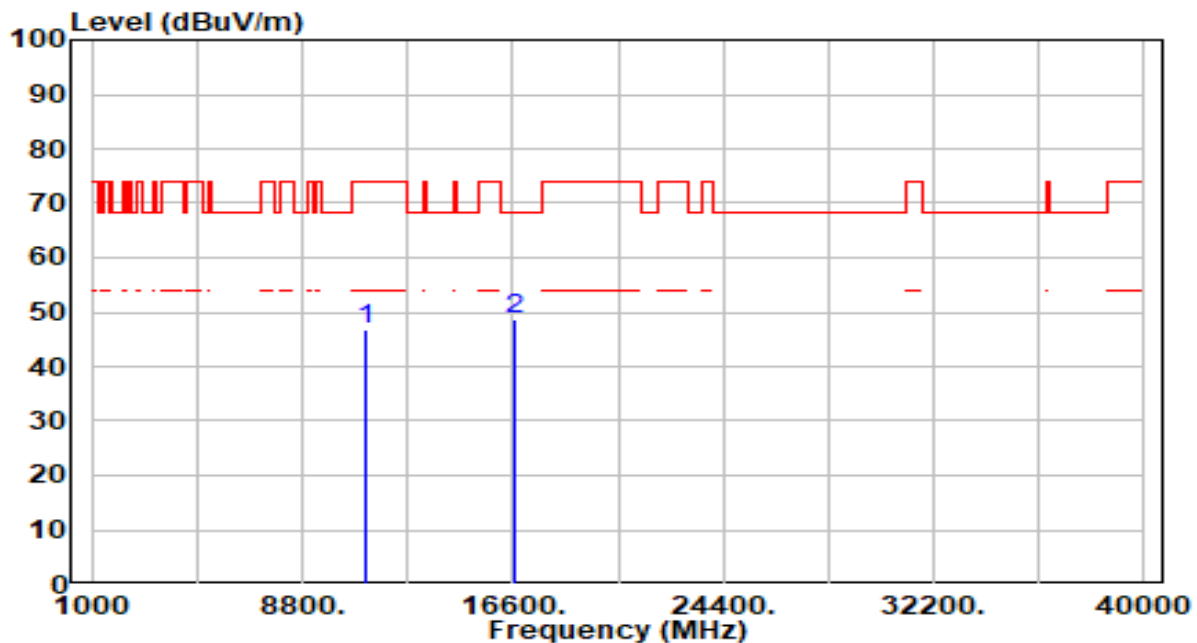


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11140.000	39.88	6.73	46.61	-27.39	74.00	100	284	Peak
2	* 16710.000	39.79	8.70	48.49	-19.71	68.20	100	198	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-160MHz_TX_Band3_CH 114_ANT 6+7	Test Voltage	By Notebook PC

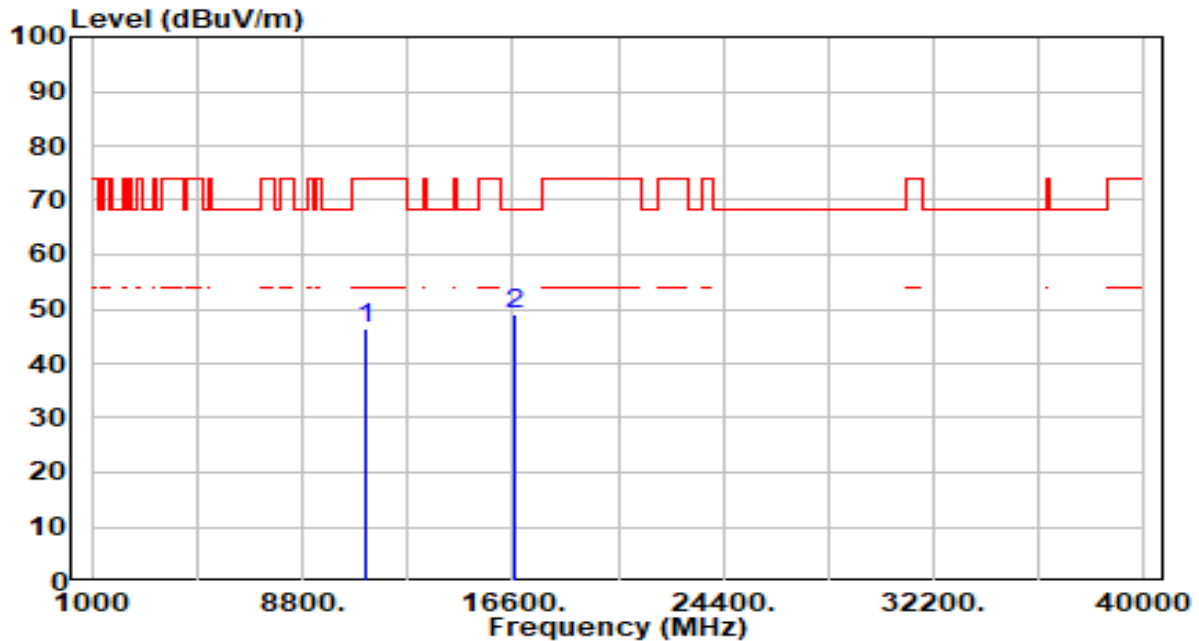


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11140.000	39.68	6.73	46.41	-27.59	74.00	100	0	Peak
2	* 16710.000	40.53	8.70	49.24	-18.96	68.20	100	325	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band1_26Tone_RU0_CH 36_ANT 6+7	Test Voltage	By Notebook PC

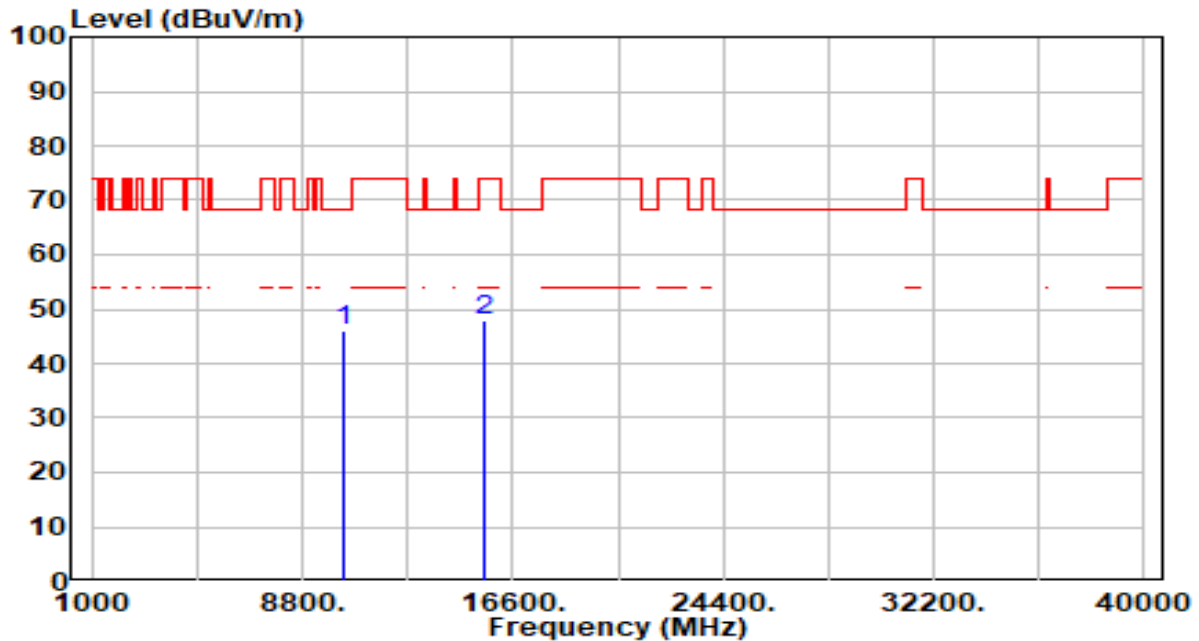


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10360.000	39.12	6.84	45.96	-22.24	68.20	100	206	Peak
2		15540.000	39.37	8.70	48.07	-25.93	74.00	100	312	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band1_26Tone_RU0_CH 36_ANT 6+7	Test Voltage	By Notebook PC

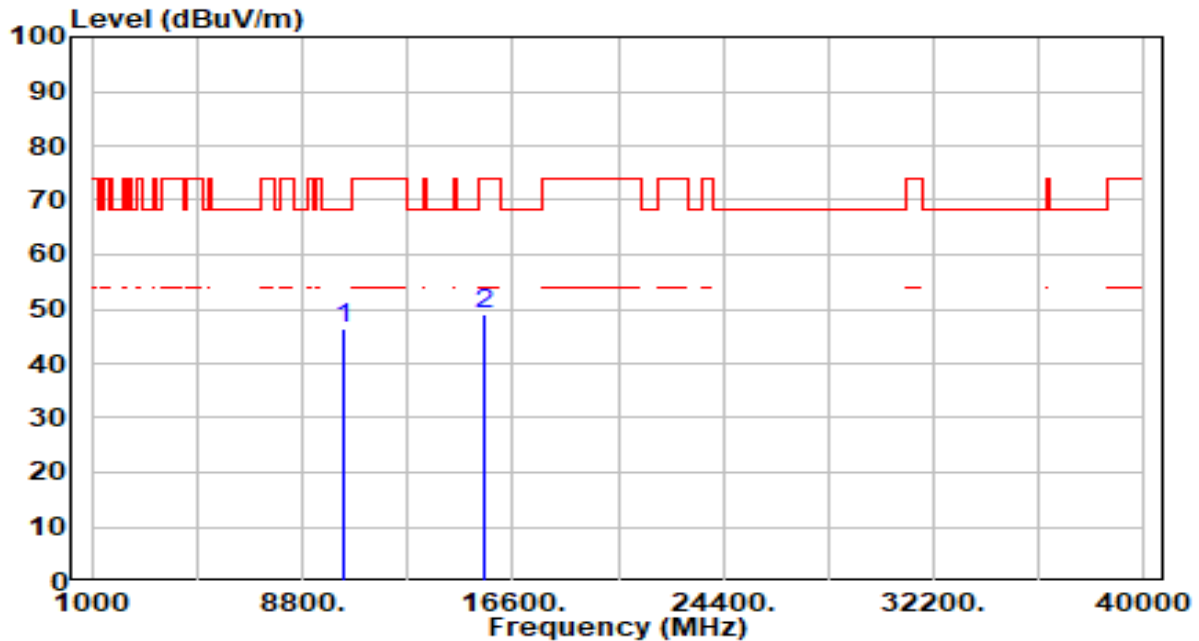


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10360.000	39.45	6.84	46.29	-21.91	68.20	100	59	Peak
2		15540.000	40.36	8.70	49.06	-24.94	74.00	100	182	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band1_52Tone_RU74_CH 36_ANT 6+7	Test Voltage	By Notebook PC

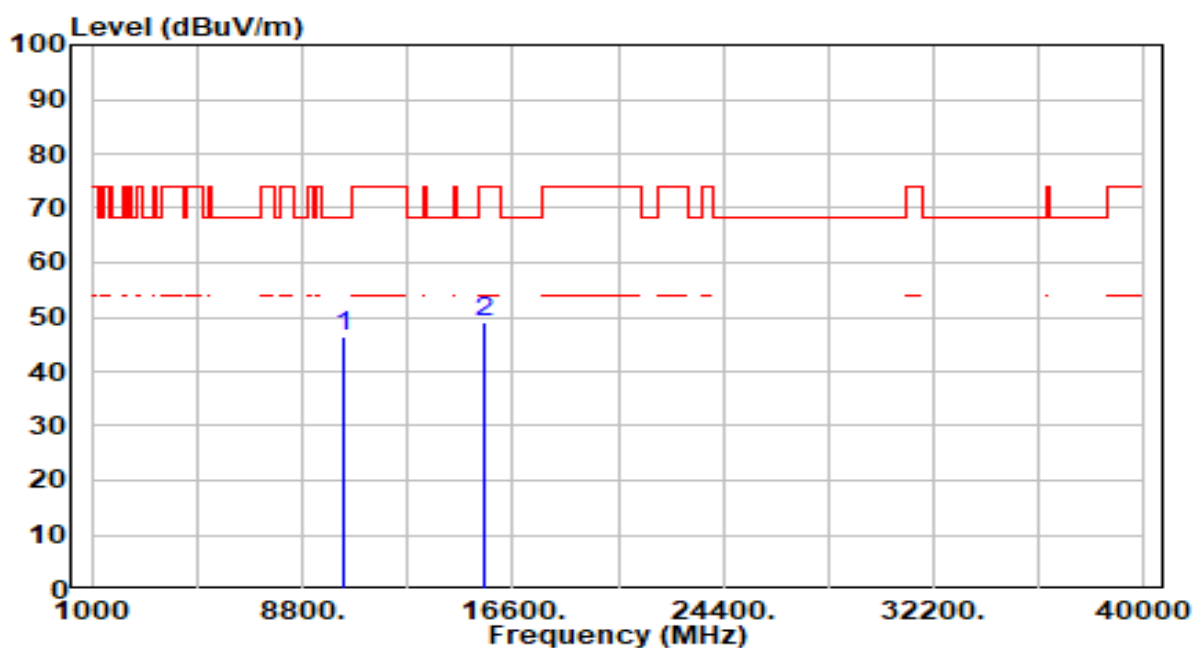


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10360.000	39.69	6.84	46.54	-21.66	68.20	100	143	Peak
2		15540.000	40.33	8.70	49.03	-24.97	74.00	100	238	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band1_52Tone_RU74_CH 36_ANT 6+7	Test Voltage	By Notebook PC

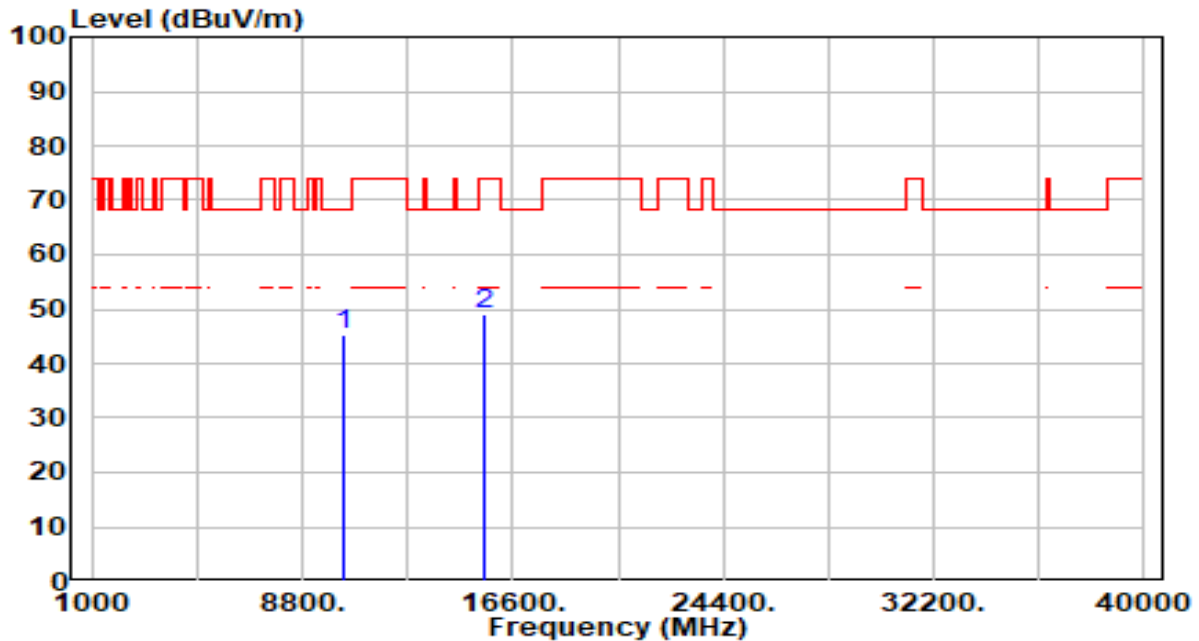


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10360.000	38.32	6.84	45.16	-23.04	68.20	100	142	Peak
2		15540.000	40.38	8.70	49.07	-24.93	74.00	100	198	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band1_106Tone_RU106_CH 36_ANT 6+7	Test Voltage	By Notebook PC

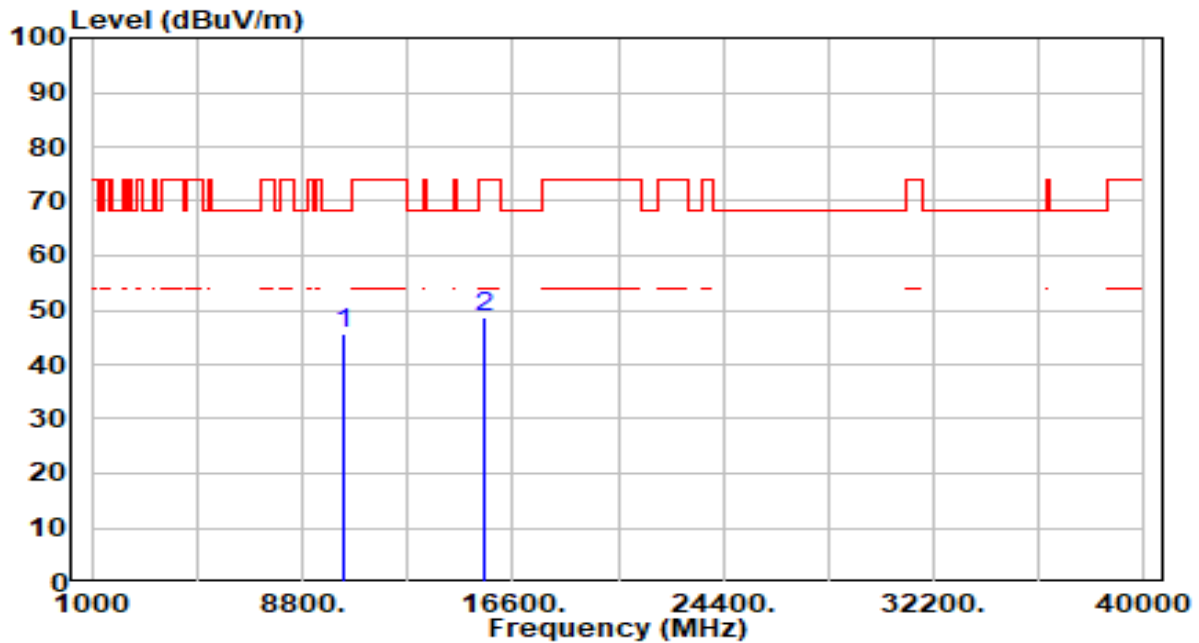


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10360.000	38.97	6.84	45.82	-22.38	68.20	100	26	Peak
2		15540.000	40.13	8.70	48.83	-25.17	74.00	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band1_106Tone_RU106_CH 36_ANT 6+7	Test Voltage	By Notebook PC

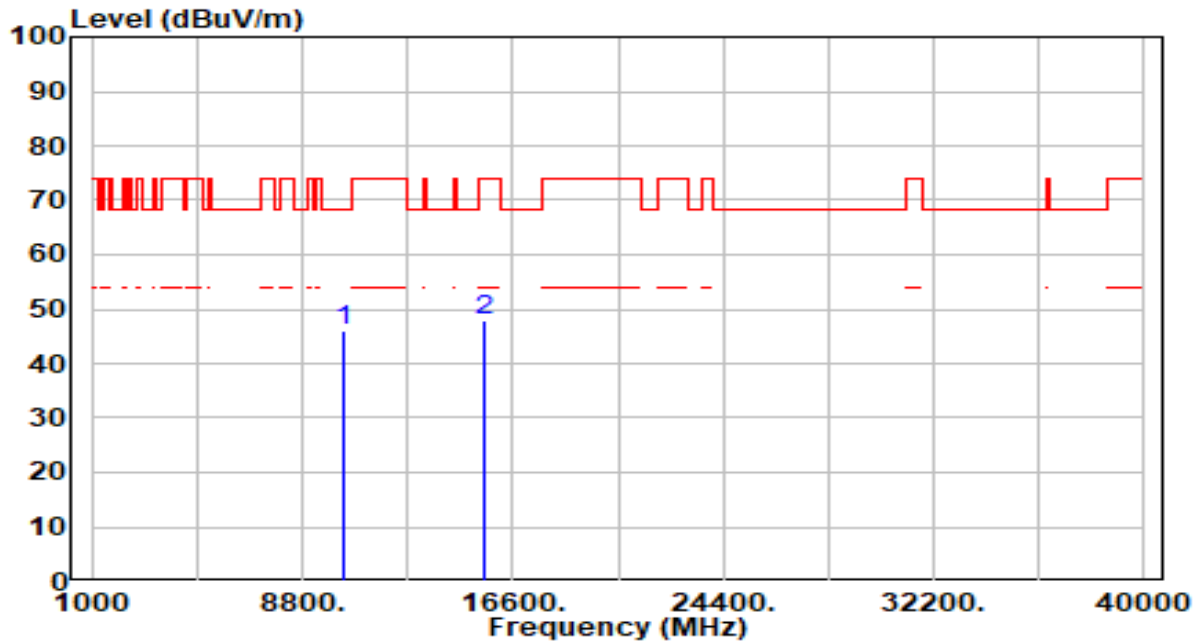


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10360.000	39.04	6.84	45.89	-22.31	68.20	100	0	Peak
2		15540.000	39.30	8.70	48.00	-26.00	74.00	100	322	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band1_242Tone_RU122_CH 36_ANT 6+7	Test Voltage	By Notebook PC

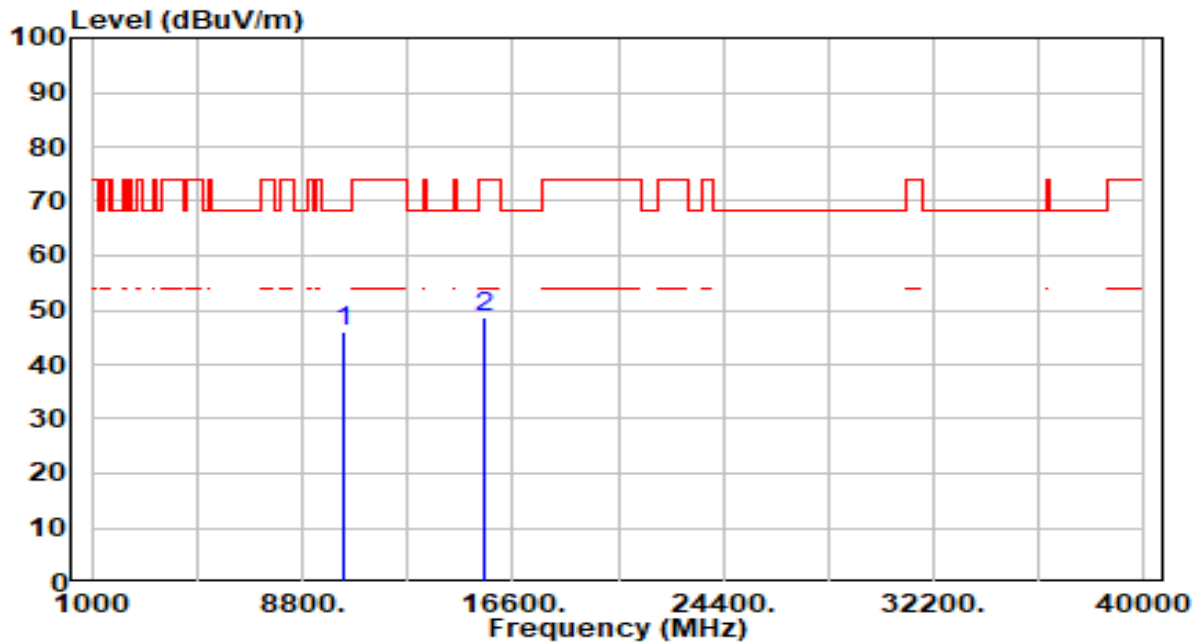


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10360.000	39.27	6.84	46.11	-22.09	68.20	100	200	Peak
2		15540.000	39.98	8.70	48.68	-25.32	74.00	100	179	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band1_242Tone_RU122_CH 36_ANT 6+7	Test Voltage	By Notebook PC

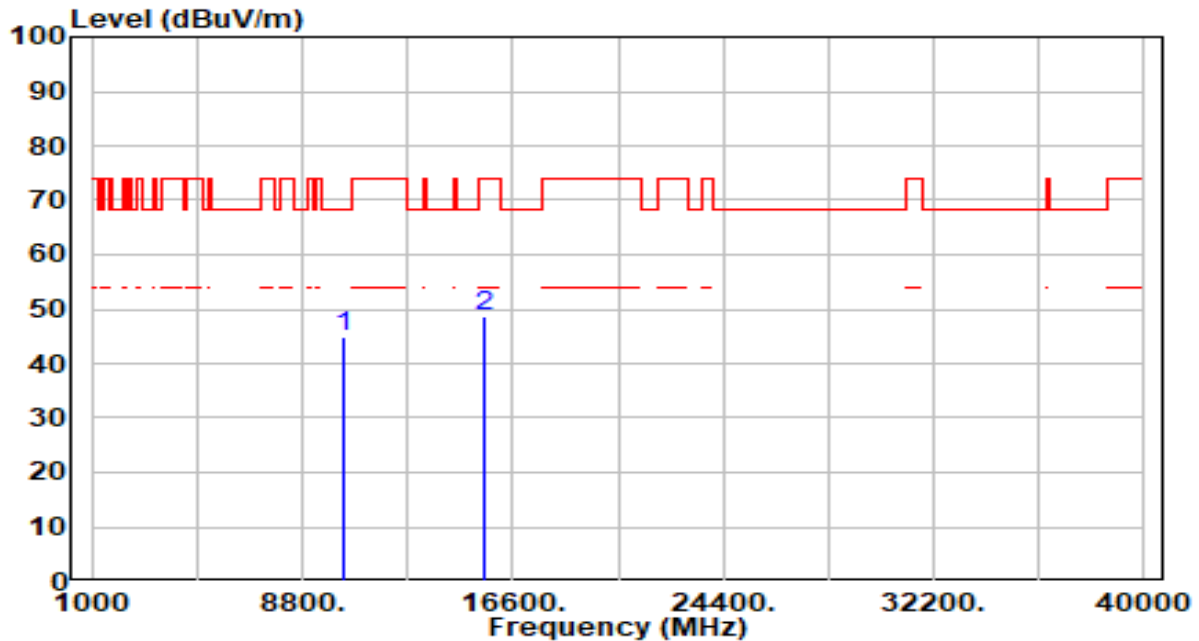


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10360.000	38.22	6.84	45.07	-23.13	68.20	100	20	Peak
2		15540.000	40.16	8.70	48.85	-25.15	74.00	100	344	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band2_26Tone_RU8_CH 64_ANT 6+7	Test Voltage	By Notebook PC

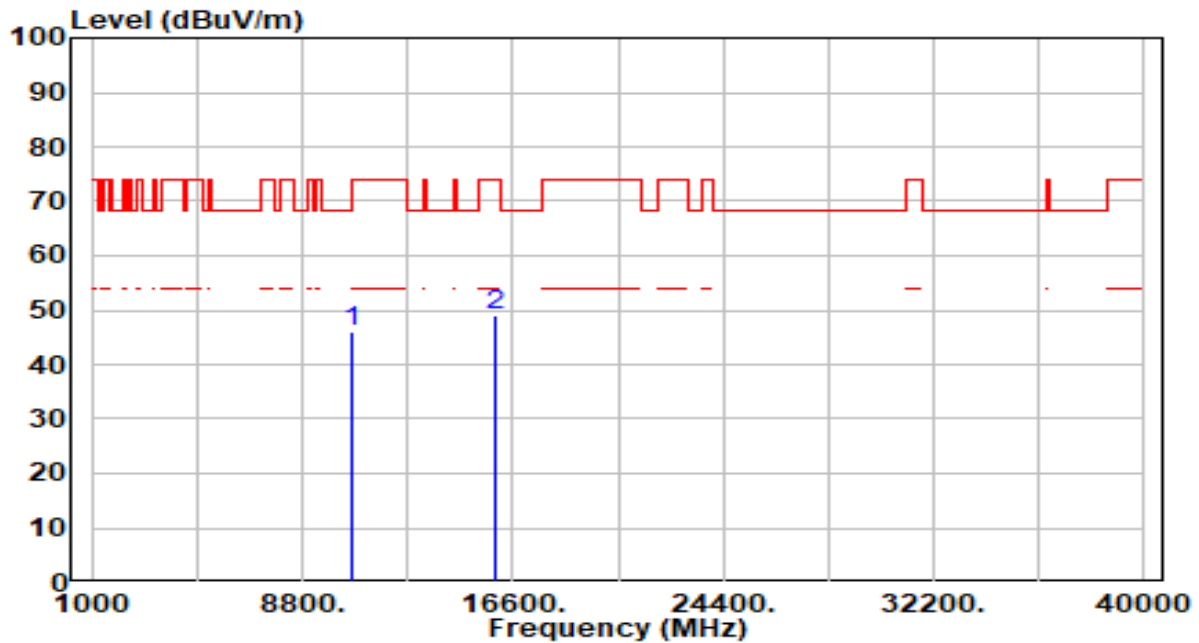


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		10640.000	39.36	6.63	45.99	-28.01	74.00	100	55	Peak
2	*	15960.000	39.82	9.13	48.95	-25.05	74.00	100	227	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band2_26Tone_RU8_CH 64_ANT 6+7	Test Voltage	By Notebook PC

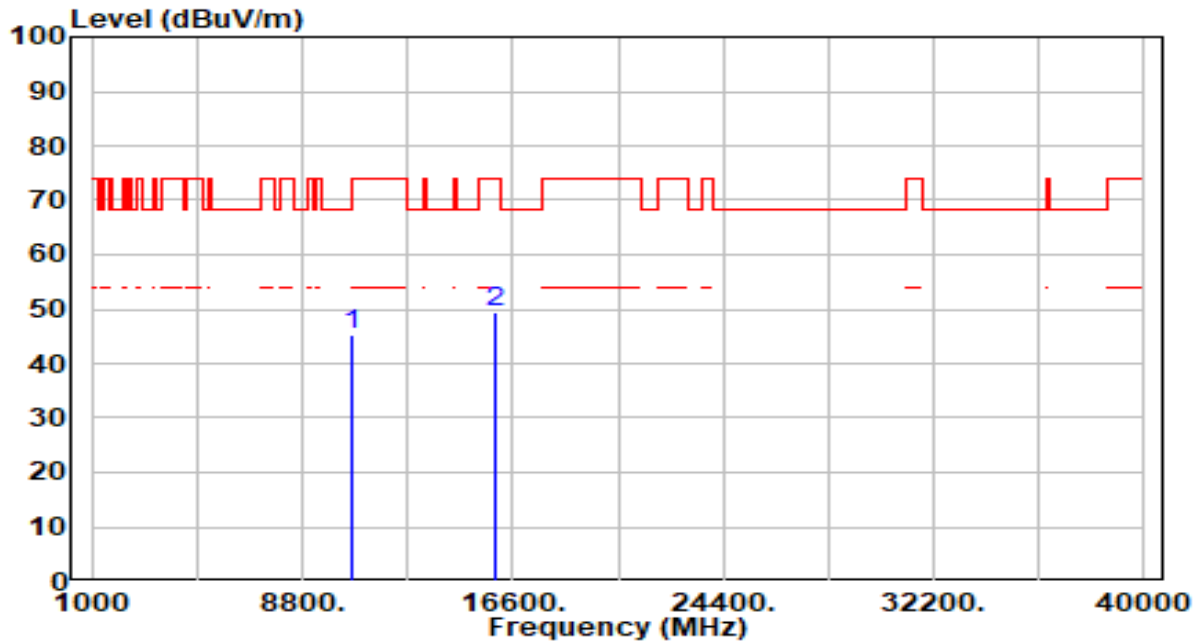


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10640.000	38.61	6.63	45.24	-28.76	74.00	100	4	Peak
2	* 15960.000	40.19	9.13	49.32	-24.68	74.00	100	0	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band2_52Tone_RU77_CH 64_ANT 6+7	Test Voltage	By Notebook PC

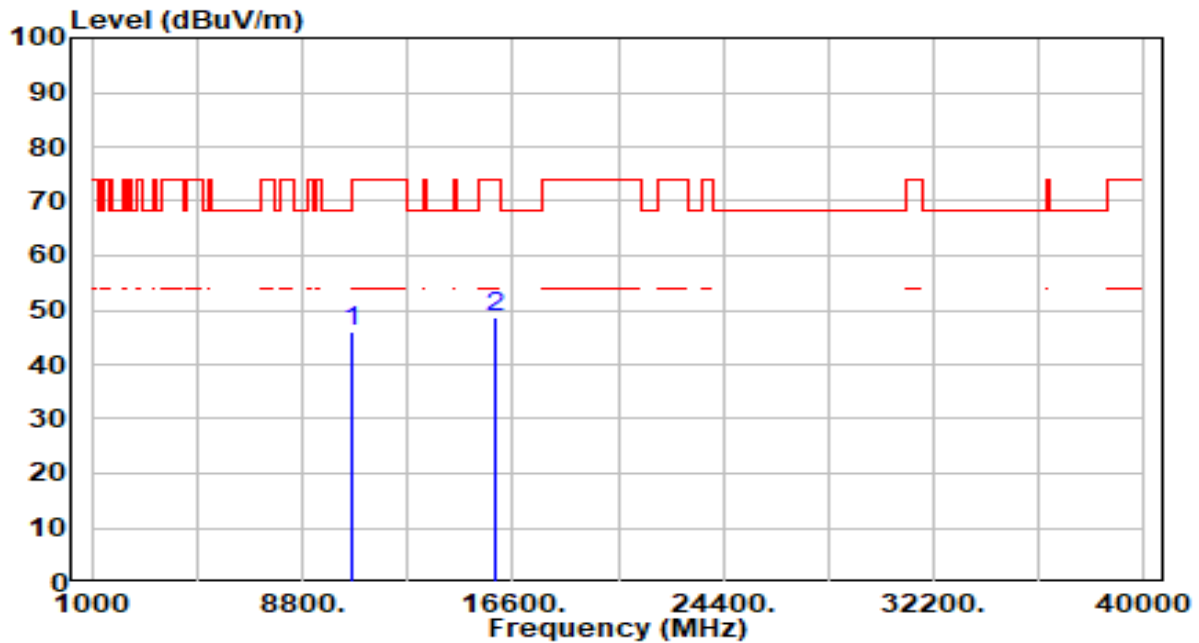


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		10640.000	39.23	6.63	45.86	-28.14	74.00	100	171	Peak
2	*	15960.000	39.59	9.13	48.72	-25.28	74.00	100	294	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band2_52Tone_RU77_CH 64_ANT 6+7	Test Voltage	By Notebook PC

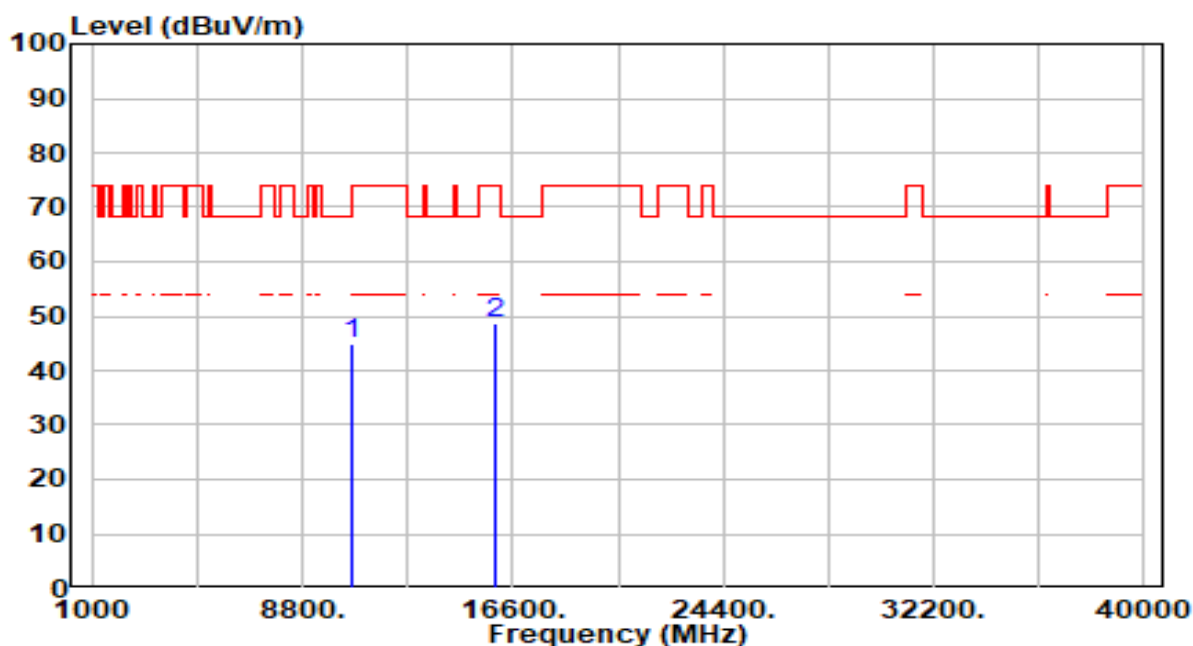


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10640.000	38.29	6.63	44.91	-29.09	74.00	100	156	Peak
2	* 15960.000	39.65	9.13	48.78	-25.22	74.00	100	56	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band2_106Tone_RU107_CH 64_ANT 6+7	Test Voltage	By Notebook PC

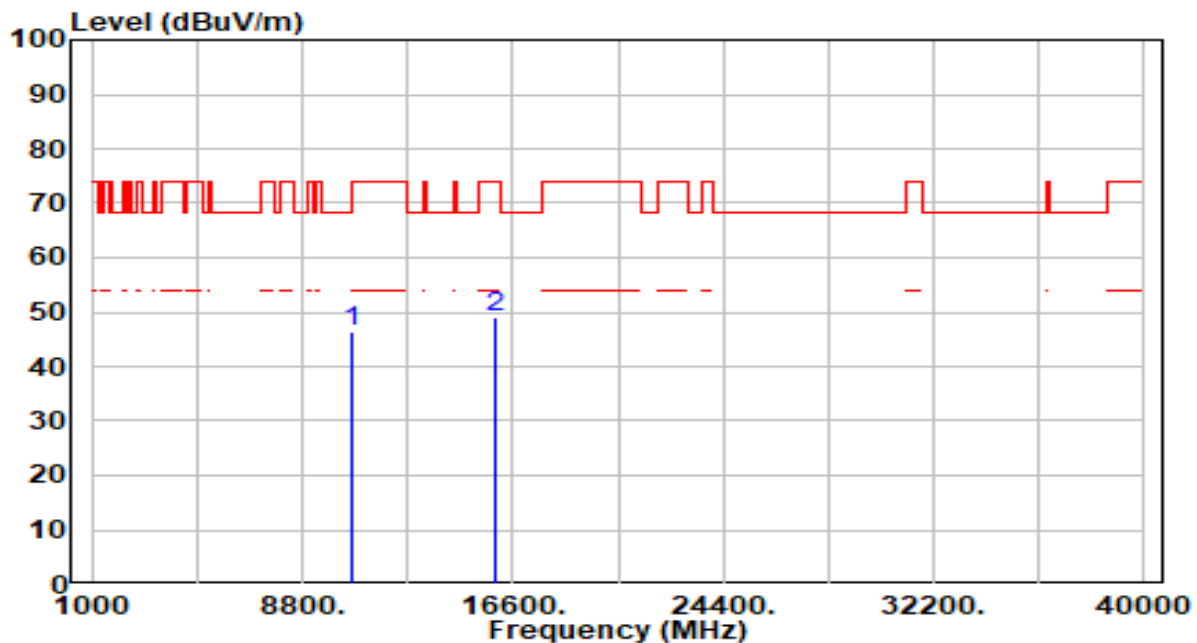


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		10640.000	39.89	6.63	46.52	-27.48	74.00	100	142	Peak
2	*	15960.000	39.90	9.13	49.03	-24.97	74.00	100	138	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band2_106Tone_RU107_CH 64_ANT 6+7	Test Voltage	By Notebook PC

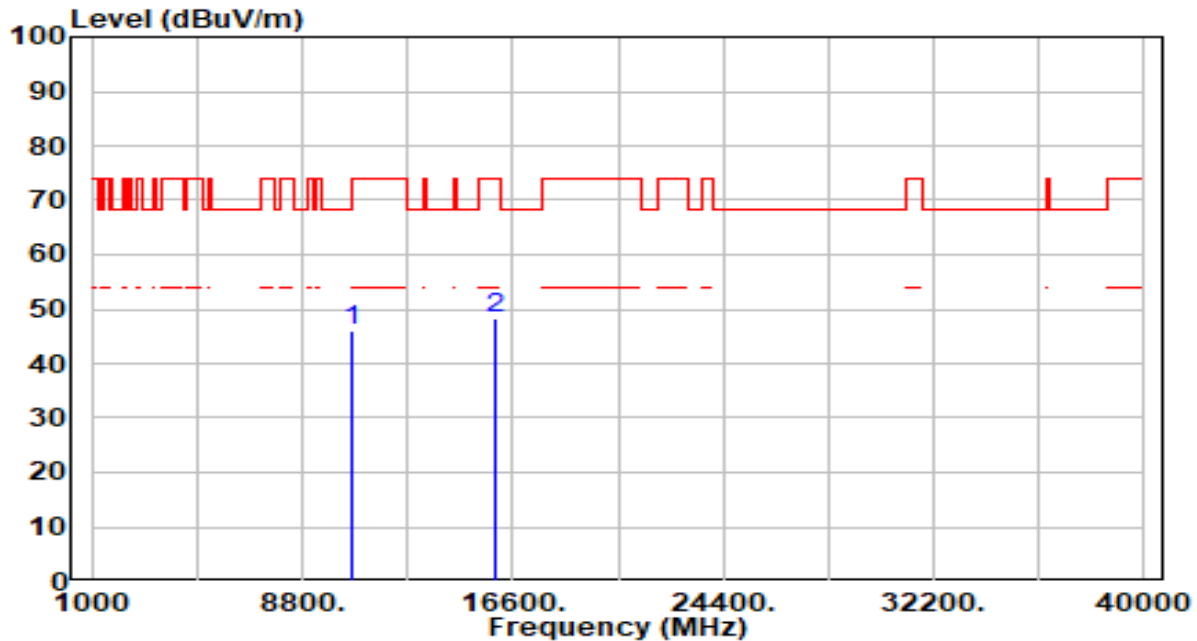


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10640.000	39.49	6.63	46.12	-27.88	74.00	100	178	Peak
2	* 15960.000	39.10	9.13	48.23	-25.77	74.00	100	193	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band2_242Tone_RU122_CH 64_ANT 6+7	Test Voltage	By Notebook PC

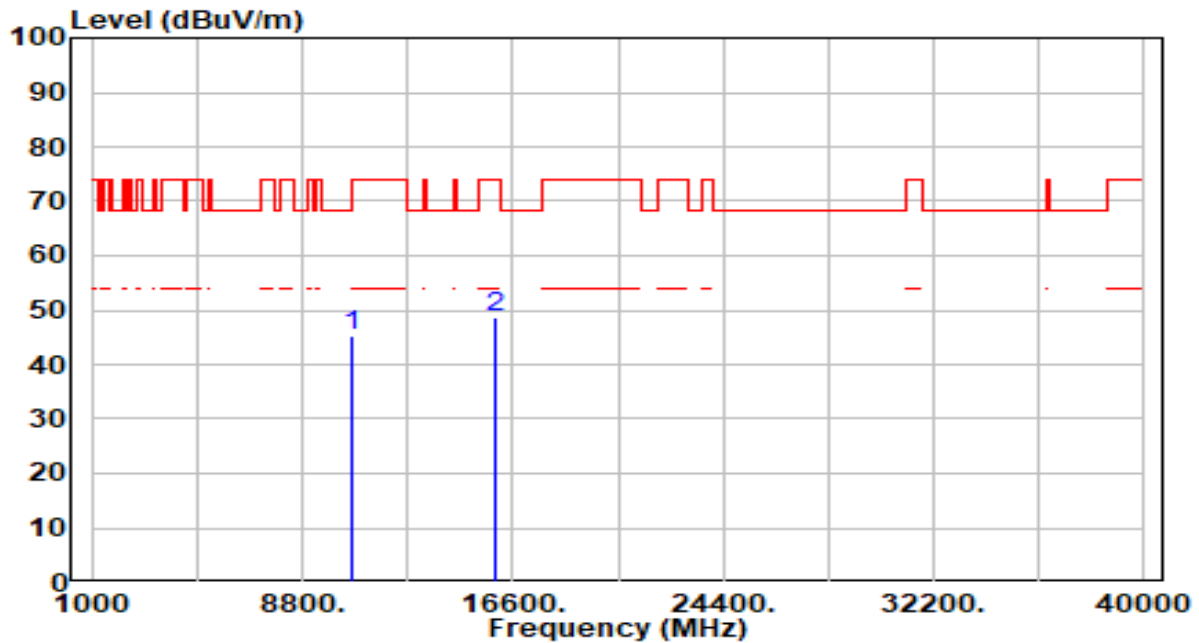


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		10640.000	38.84	6.63	45.47	-28.53	74.00	100	256	Peak
2	*	15960.000	39.57	9.13	48.70	-25.30	74.00	100	211	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band2_242Tone_RU122_CH 64_ANT 6+7	Test Voltage	By Notebook PC

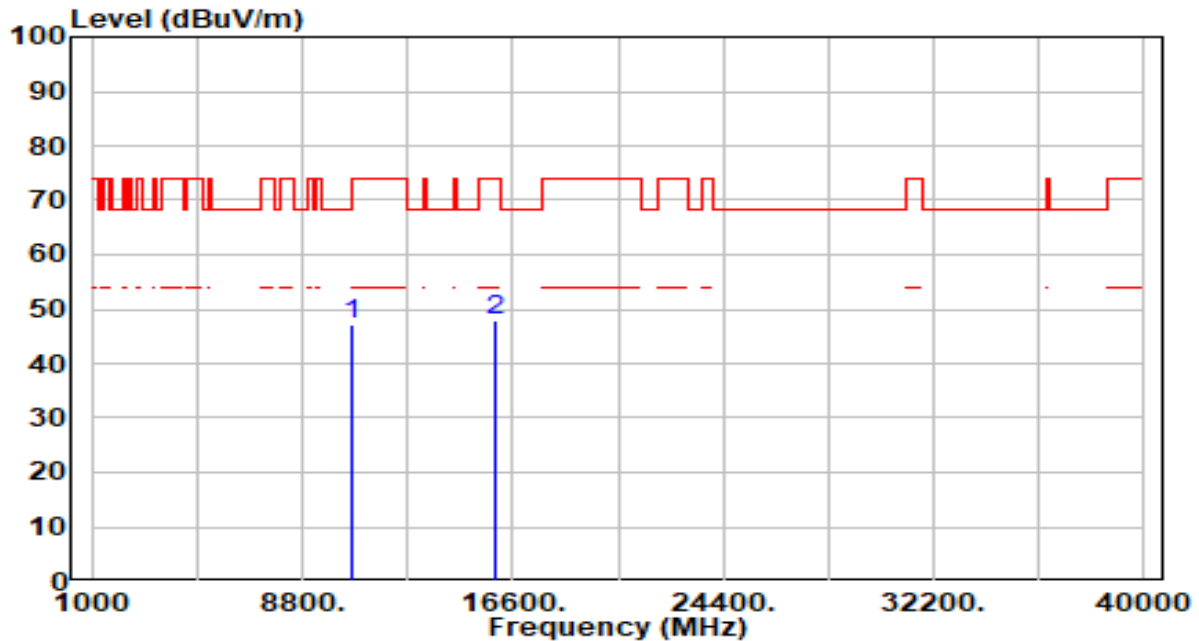


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10640.000	40.43	6.63	47.06	-26.94	74.00	100	182	Peak
2	* 15960.000	38.79	9.13	47.92	-26.08	74.00	100	225	Peak

Note:

1. " * ", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band3_26Tone_RU0_CH 100_ANT 6+7	Test Voltage	By Notebook PC

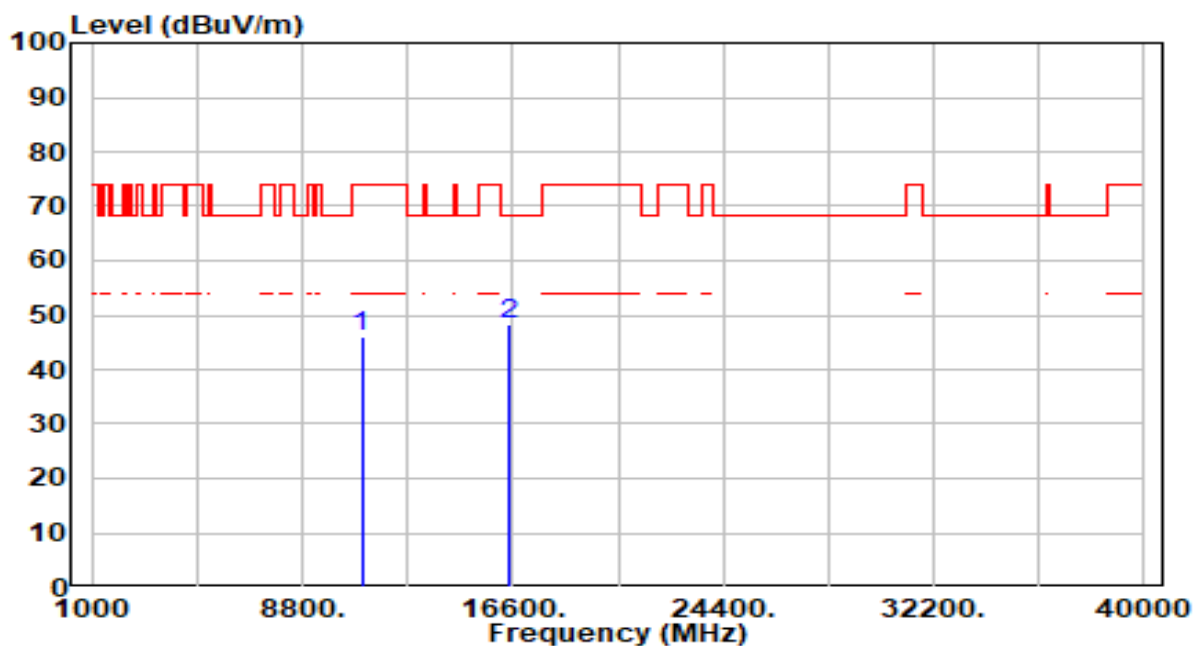


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11000.000	39.52	6.40	45.92	-28.08	74.00	100	46	Peak
2	*	16500.000	39.50	8.74	48.24	-19.96	68.20	100	359	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band3_26Tone_RU0_CH 100_ANT 6+7	Test Voltage	By Notebook PC

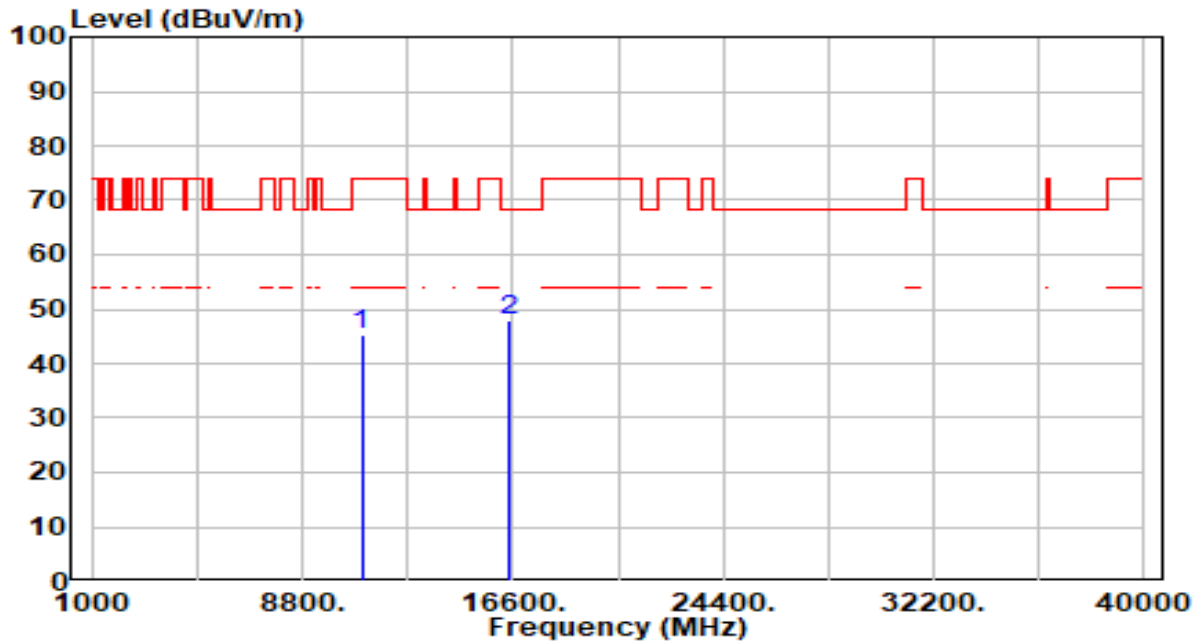


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11000.000	38.80	6.40	45.20	-28.80	74.00	100	122	Peak
2	* 16500.000	39.09	8.74	47.83	-20.37	68.20	100	154	Peak

Note:

1. " * ", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band3_26Tone_RU8_CH 140_ANT 6+7	Test Voltage	By Notebook PC

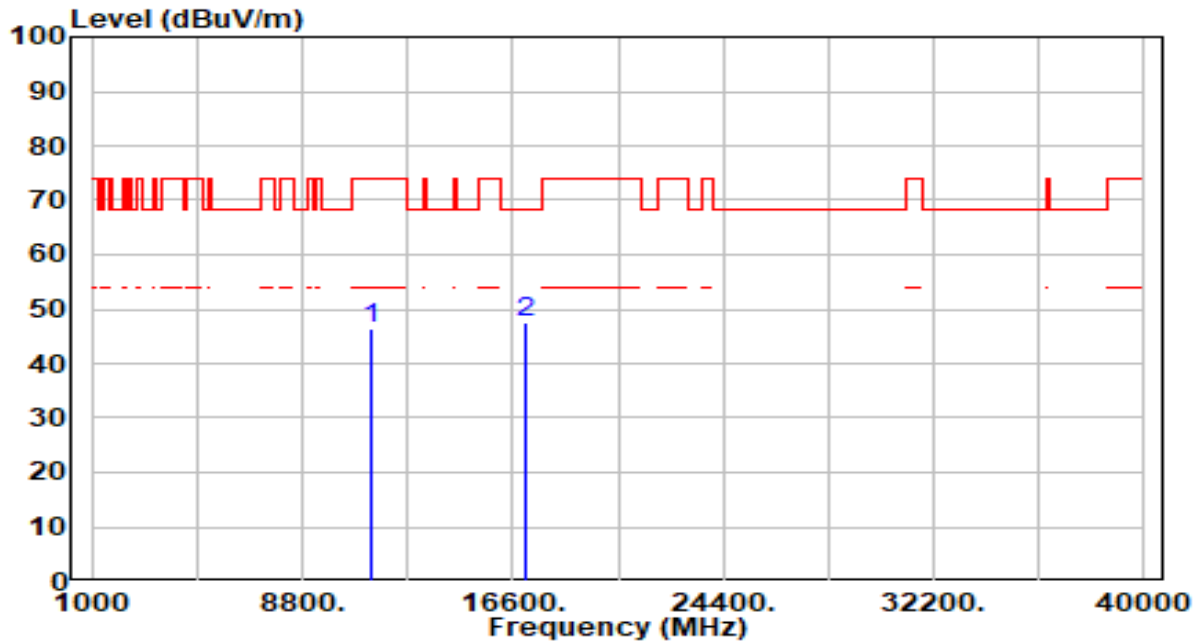


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11400.000	39.33	7.21	46.54	-27.46	74.00	100	219	Peak
2	* 17100.000	39.17	8.22	47.39	-20.81	68.20	100	131	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band3_26Tone_RU8_CH 140_ANT 6+7	Test Voltage	By Notebook PC

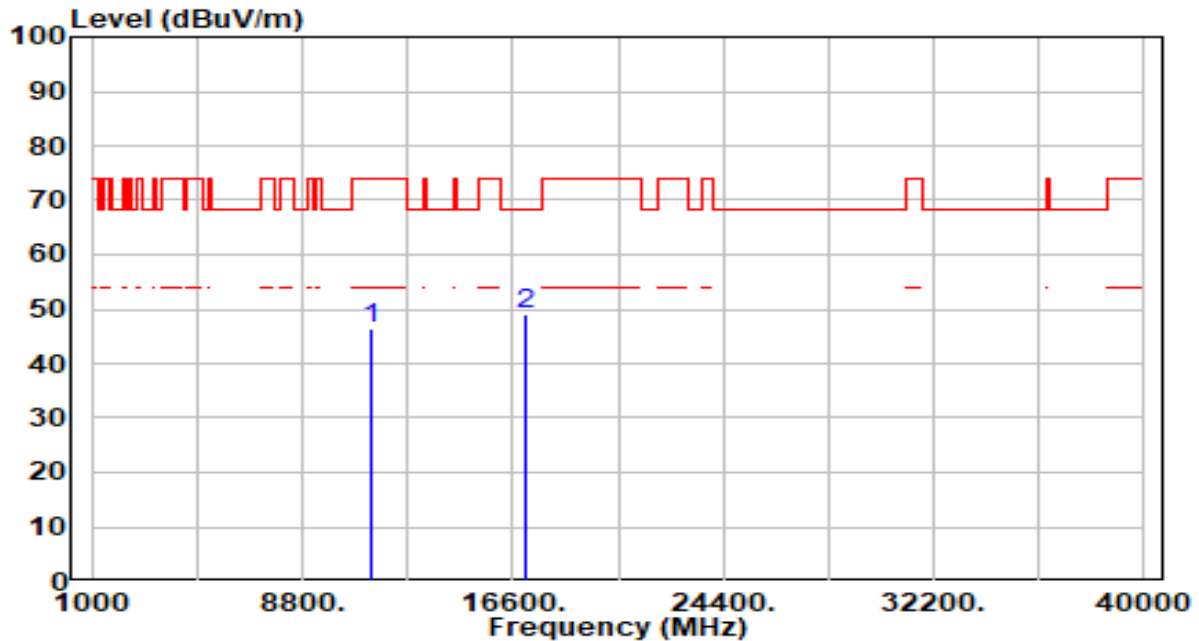


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11400.000	39.18	7.21	46.39	-27.61	74.00	100	262	Peak
2	* 17100.000	40.73	8.22	48.95	-19.25	68.20	100	156	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band3_52Tone_RU74_CH 100_ANT 6+7	Test Voltage	By Notebook PC

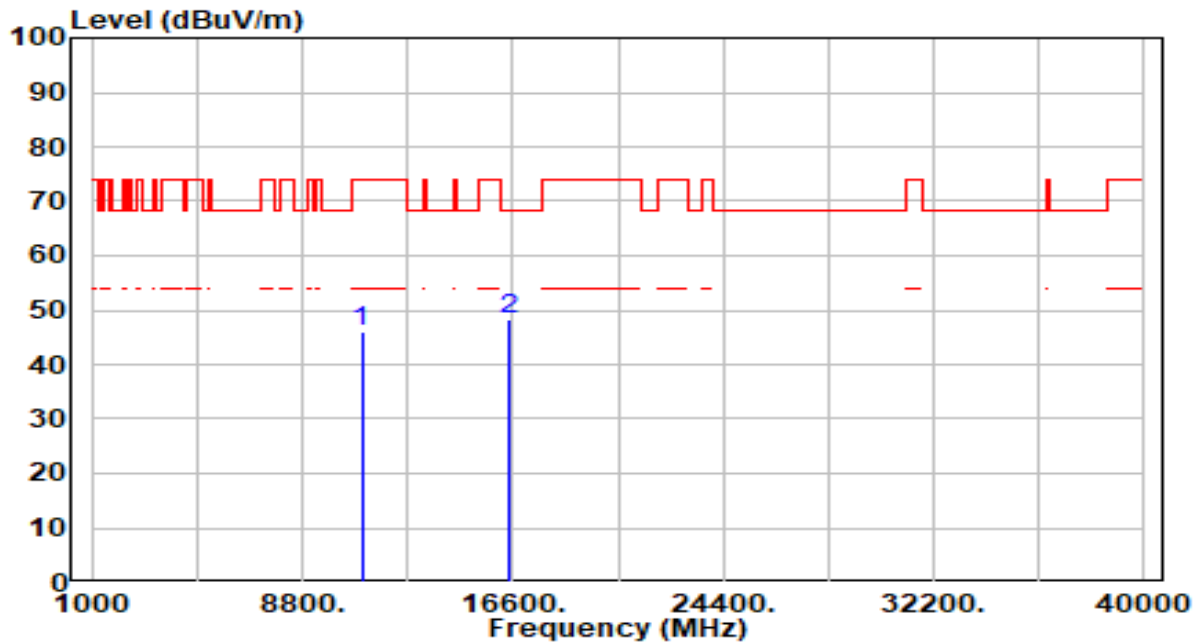


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11000.000	39.67	6.40	46.07	-27.93	74.00	100	360	Peak
2	*	16500.000	39.74	8.74	48.48	-19.72	68.20	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band3_52Tone_RU74_CH 100_ANT 6+7	Test Voltage	By Notebook PC

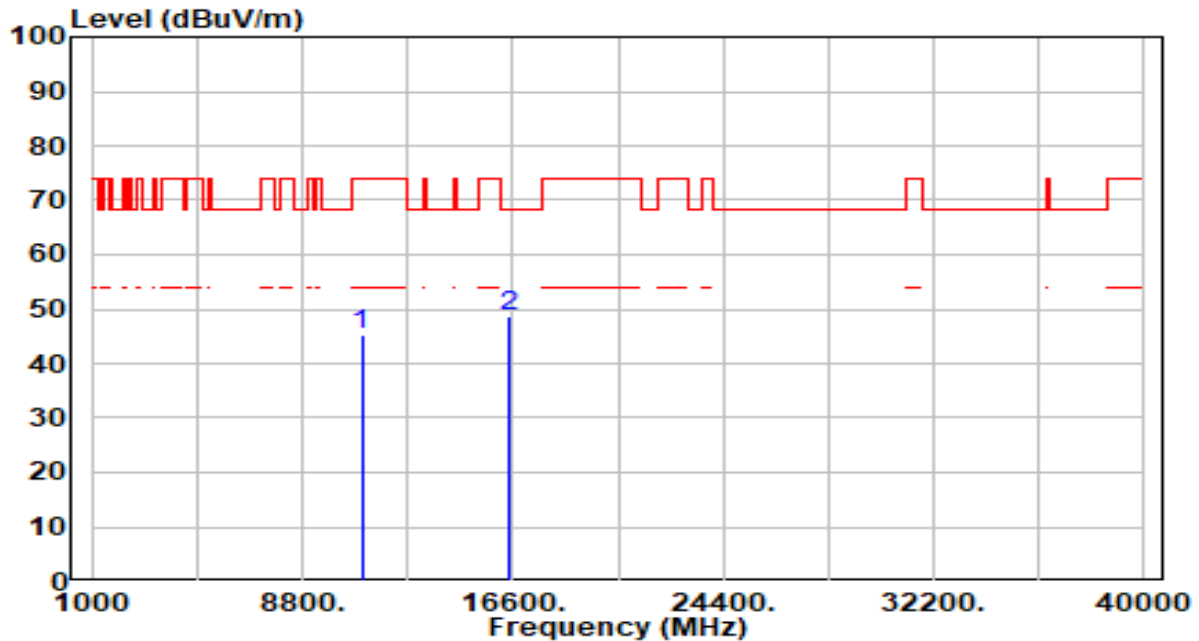


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11000.000	38.83	6.40	45.23	-28.77	74.00	100	101	Peak
2	* 16500.000	40.03	8.74	48.77	-19.43	68.20	100	246	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band3_52Tone_RU77_CH 140_ANT 6+7	Test Voltage	By Notebook PC

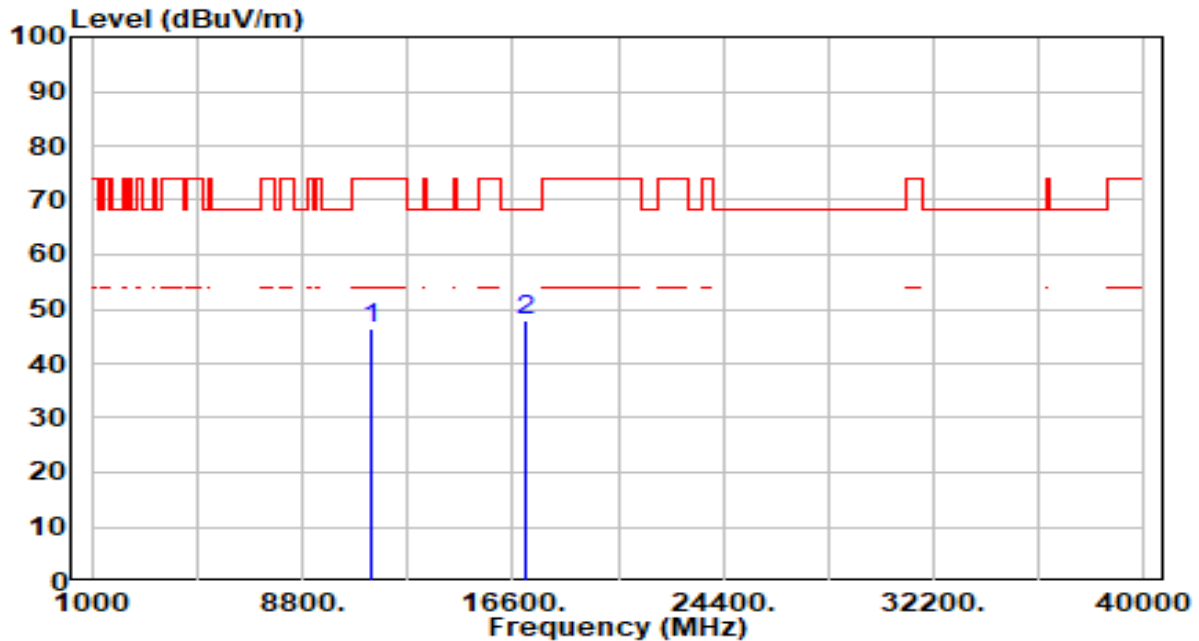


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11400.000	39.24	7.21	46.45	-27.55	74.00	100	141	Peak
2	* 17100.000	39.77	8.22	47.99	-20.21	68.20	100	207	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band3_52Tone_RU77_CH 140_ANT 6+7	Test Voltage	By Notebook PC

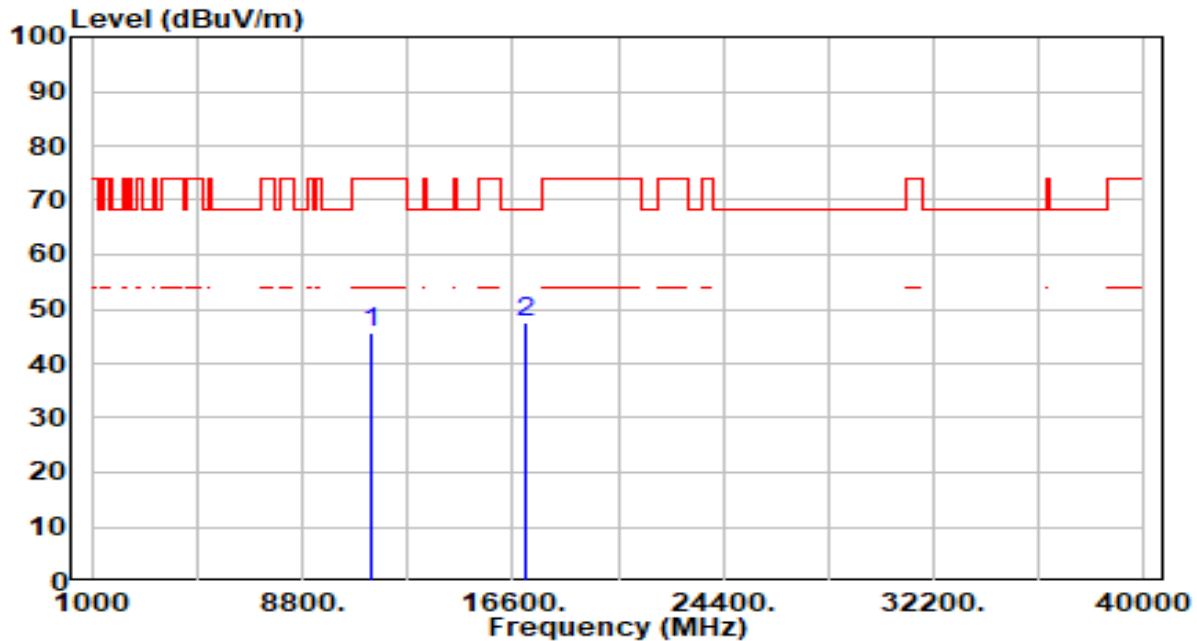


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11400.000	38.49	7.21	45.70	-28.30	74.00	100	247	Peak
2	* 17100.000	39.37	8.22	47.59	-20.61	68.20	100	72	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band3_106Tone_RU106_CH 100_ANT 6+7	Test Voltage	By Notebook PC

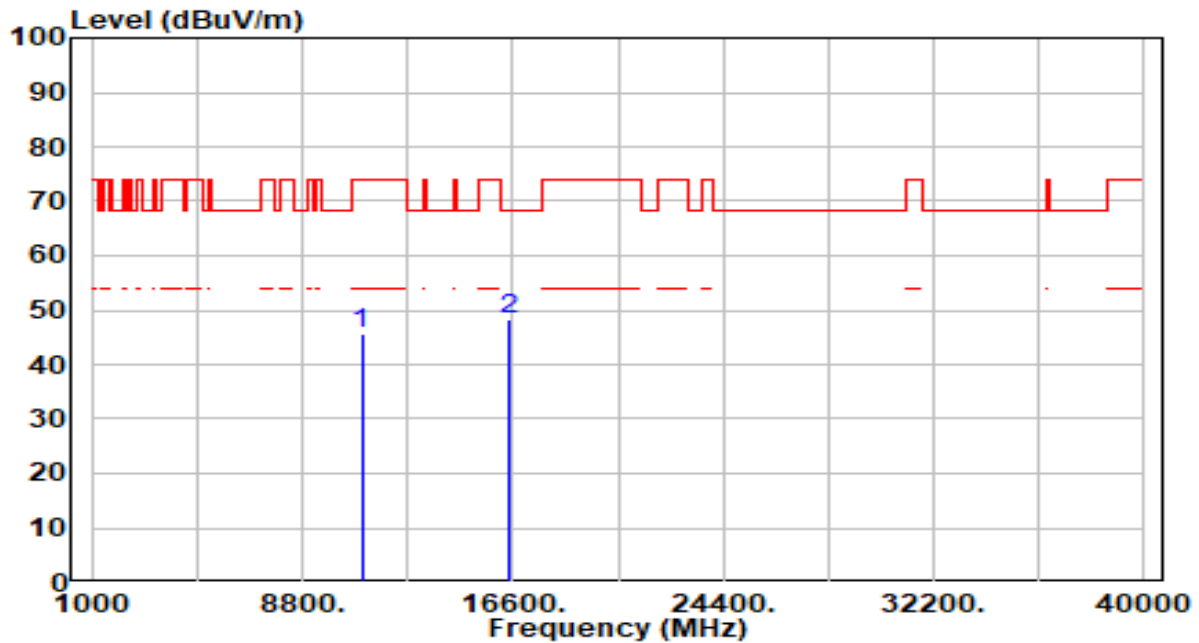


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11000.000	39.32	6.40	45.72	-28.28	74.00	100	0	Peak
2	*	16500.000	39.57	8.74	48.31	-19.89	68.20	100	121	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band3_106Tone_RU106_CH 100_ANT 6+7	Test Voltage	By Notebook PC

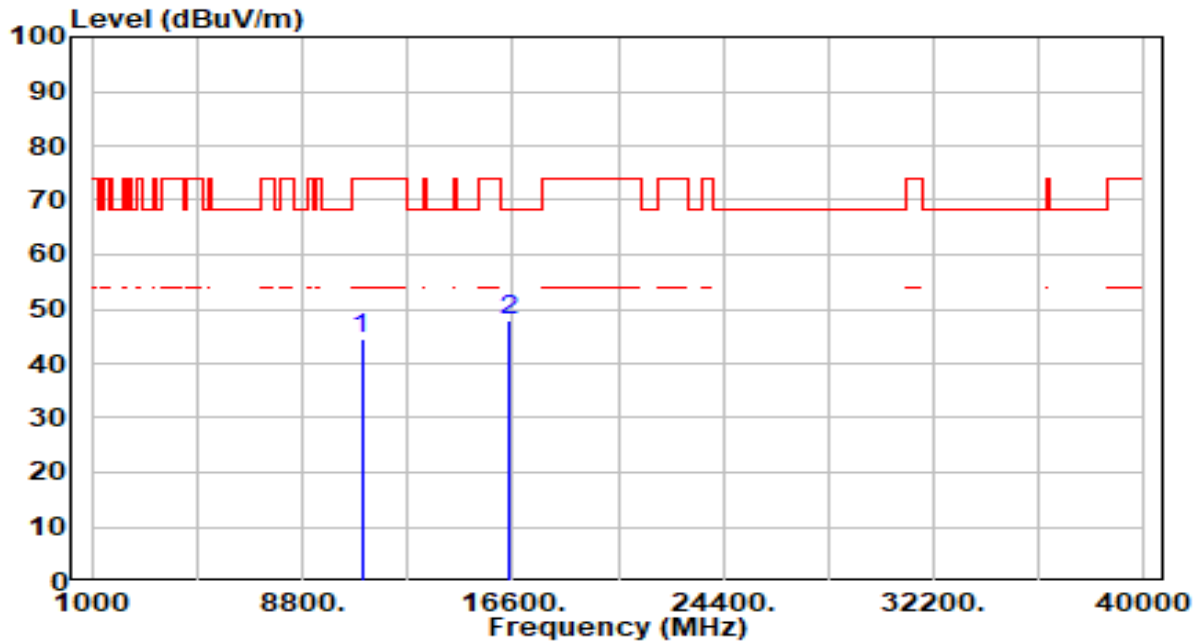


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11000.000	37.95	6.40	44.35	-29.65	74.00	100	211	Peak
2	* 16500.000	39.15	8.74	47.89	-20.31	68.20	100	271	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band3_106Tone_RU107_CH 140_ANT 6+7	Test Voltage	By Notebook PC

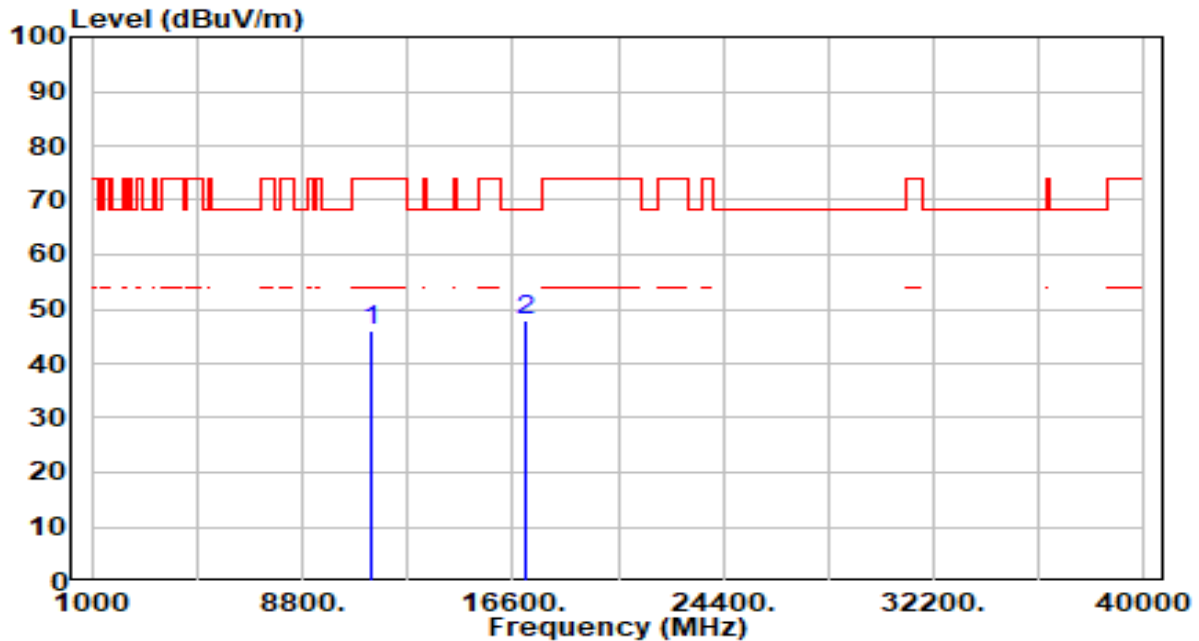


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11400.000	38.65	7.21	45.86	-28.14	74.00	100	0	Peak
2	* 17100.000	39.81	8.22	48.03	-20.17	68.20	100	2	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band3_106Tone_RU107_CH 140_ANT 6+7	Test Voltage	By Notebook PC

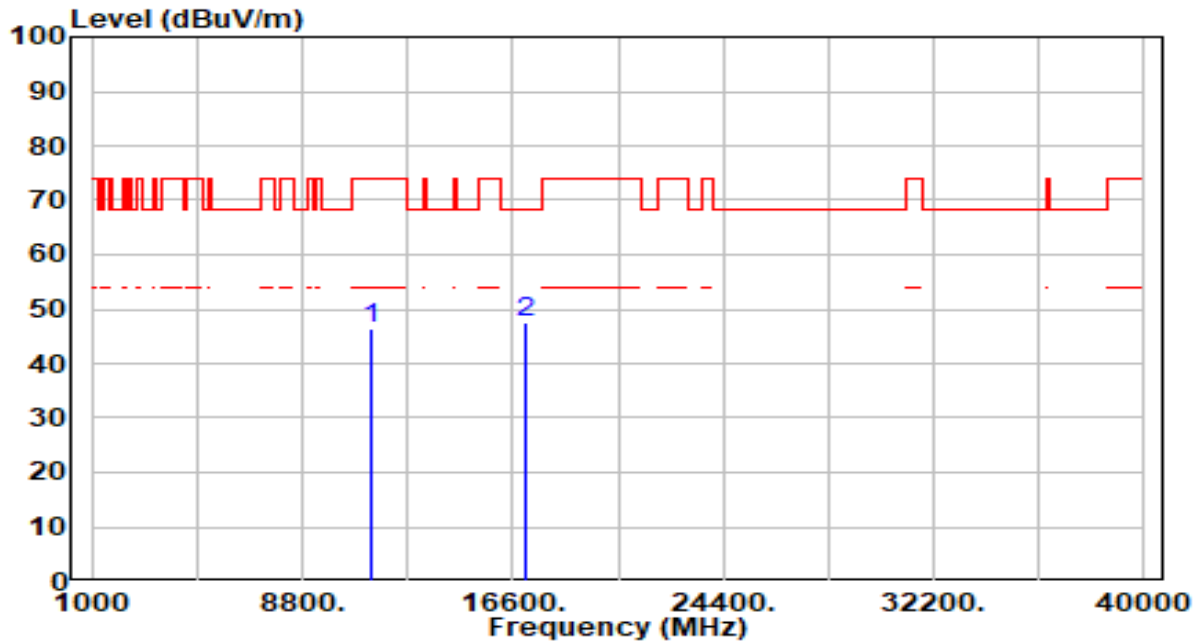


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11400.000	39.33	7.21	46.54	-27.46	74.00	100	205	Peak
2	* 17100.000	39.47	8.22	47.68	-20.52	68.20	100	248	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band3_242Tone_RU122_CH 100_ANT 6+7	Test Voltage	By Notebook PC

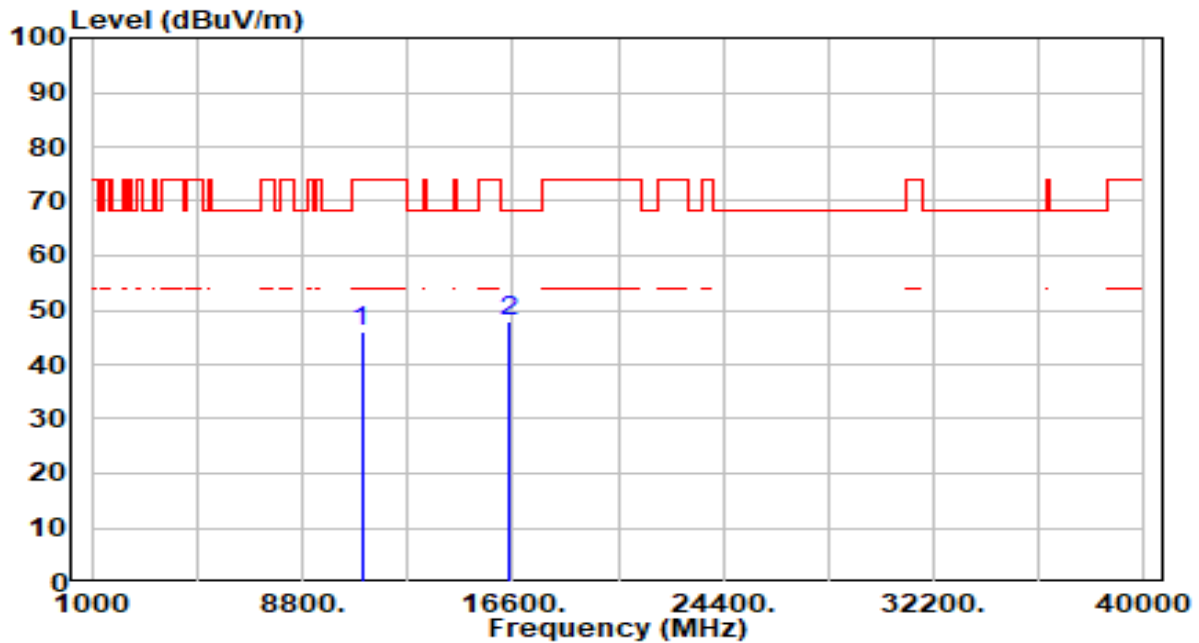


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11000.000	39.79	6.40	46.19	-27.81	74.00	100	158	Peak
2	*	16500.000	39.17	8.74	47.91	-20.29	68.20	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band3_242Tone_RU122_CH 100_ANT 6+7	Test Voltage	By Notebook PC

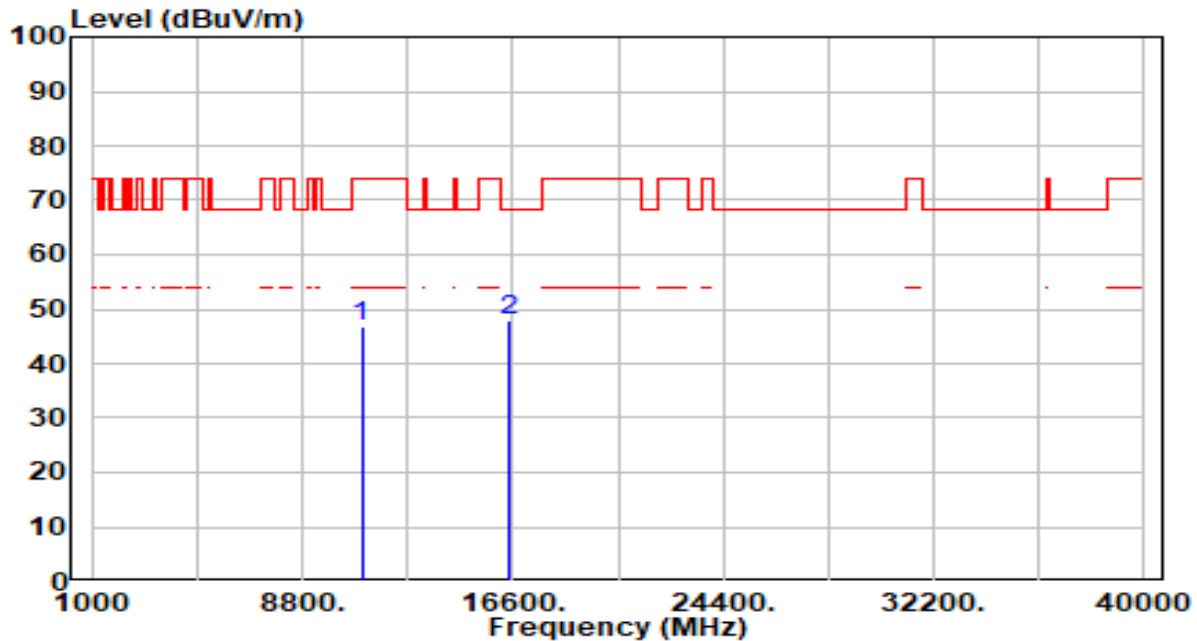


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11000.000	40.37	6.40	46.77	-27.23	74.00	100	52	Peak
2	* 16500.000	39.15	8.74	47.89	-20.31	68.20	100	130	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band3_242Tone_RU122_CH 140_ANT 6+7	Test Voltage	By Notebook PC

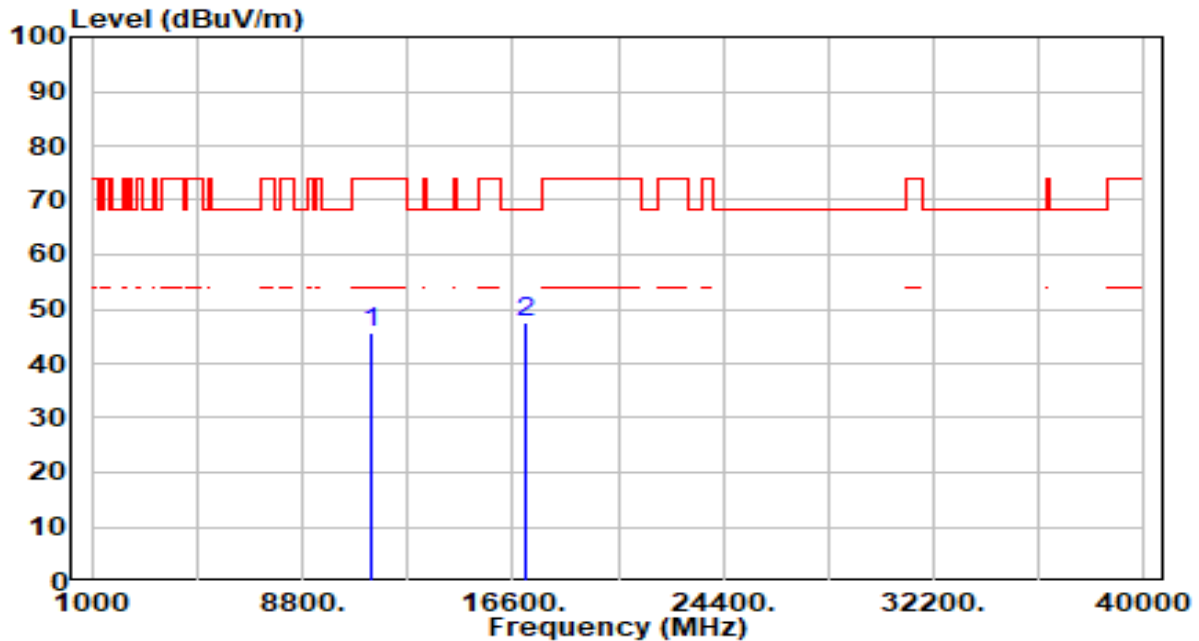


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11400.000	38.63	7.21	45.84	-28.16	74.00	100	190	Peak
2	* 17100.000	39.41	8.22	47.63	-20.57	68.20	100	0	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band3_242Tone_RU122_CH 140_ANT 6+7	Test Voltage	By Notebook PC

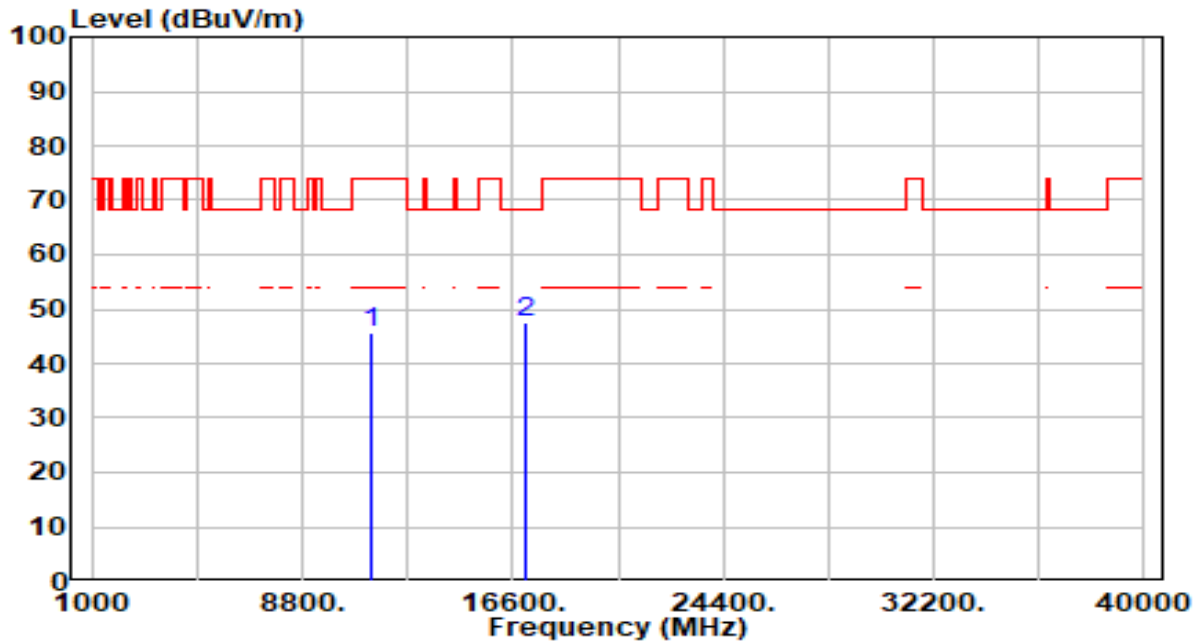


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11400.000	38.42	7.21	45.63	-28.37	74.00	100	153	Peak
2	* 17100.000	39.40	8.22	47.61	-20.59	68.20	100	300	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band4_26Tone_RU0_CH 149_ANT 6+7	Test Voltage	By Notebook PC

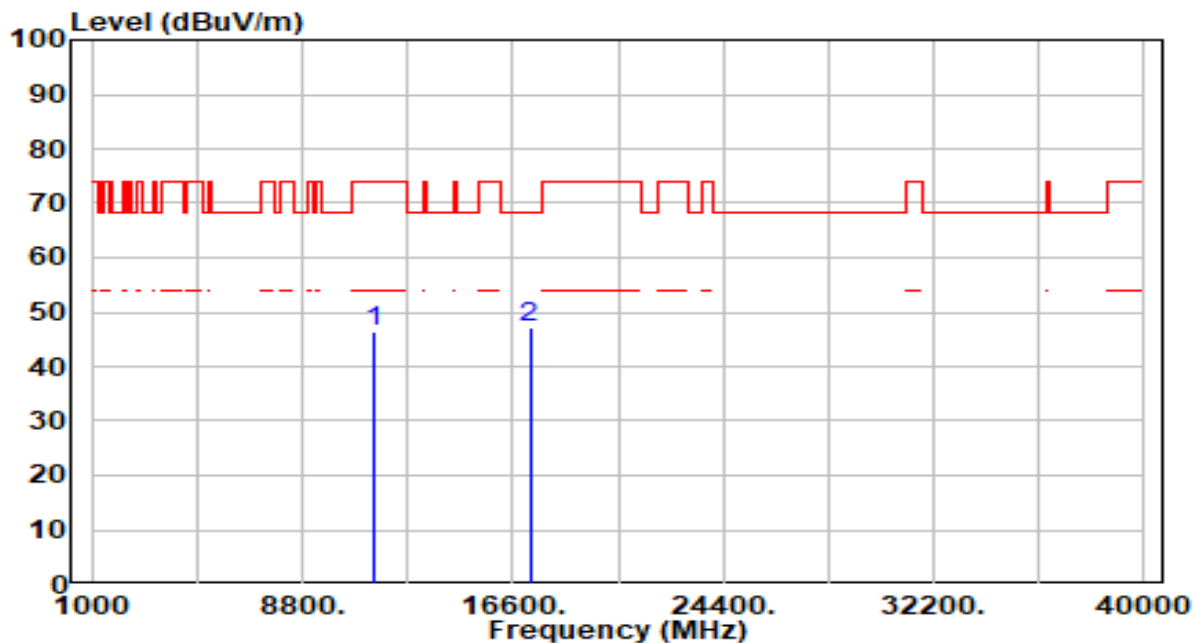


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11490.000	39.09	7.19	46.28	-27.72	74.00	100	360	Peak
2	* 17235.000	39.13	7.87	47.00	-21.20	68.20	100	74	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band4_26Tone_RU0_CH 149_ANT 6+7	Test Voltage	By Notebook PC

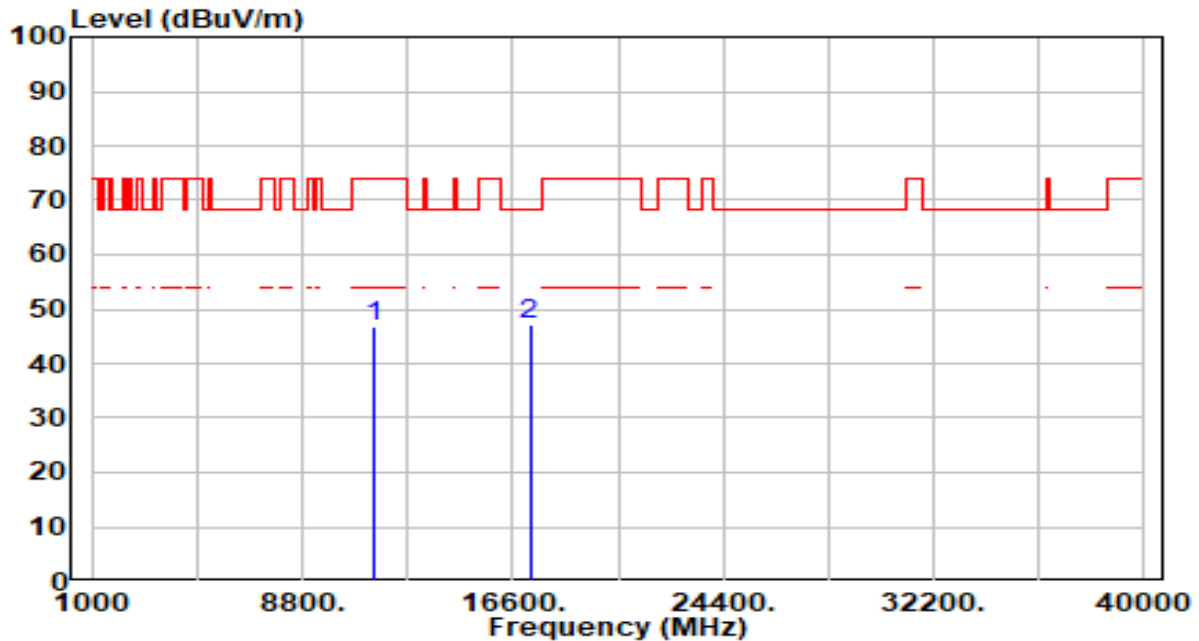


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11490.000	39.53	7.19	46.71	-27.29	74.00	100	86	Peak
2	* 17235.000	39.19	7.87	47.06	-21.14	68.20	100	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band4_26Tone_RU8_CH 165_ANT 6+7	Test Voltage	By Notebook PC

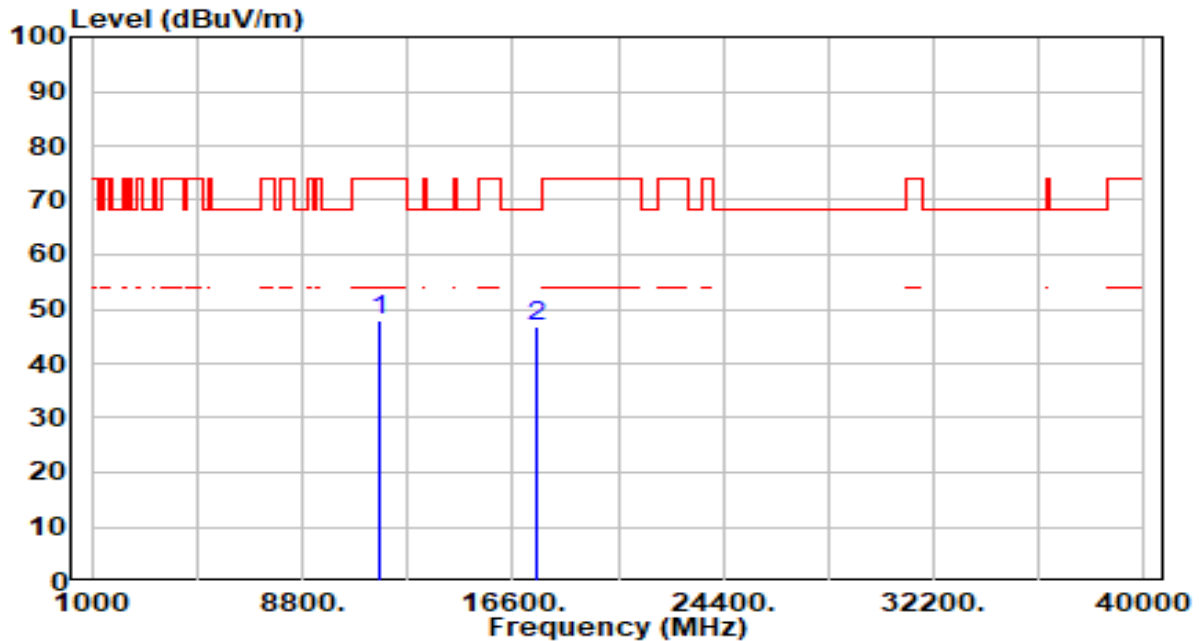


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11650.000	40.67	7.22	47.89	-26.11	74.00	100	121	Peak
2	* 17475.000	39.46	7.41	46.87	-21.33	68.20	100	180	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band4_26Tone_RU8_CH 165_ANT 6+7	Test Voltage	By Notebook PC

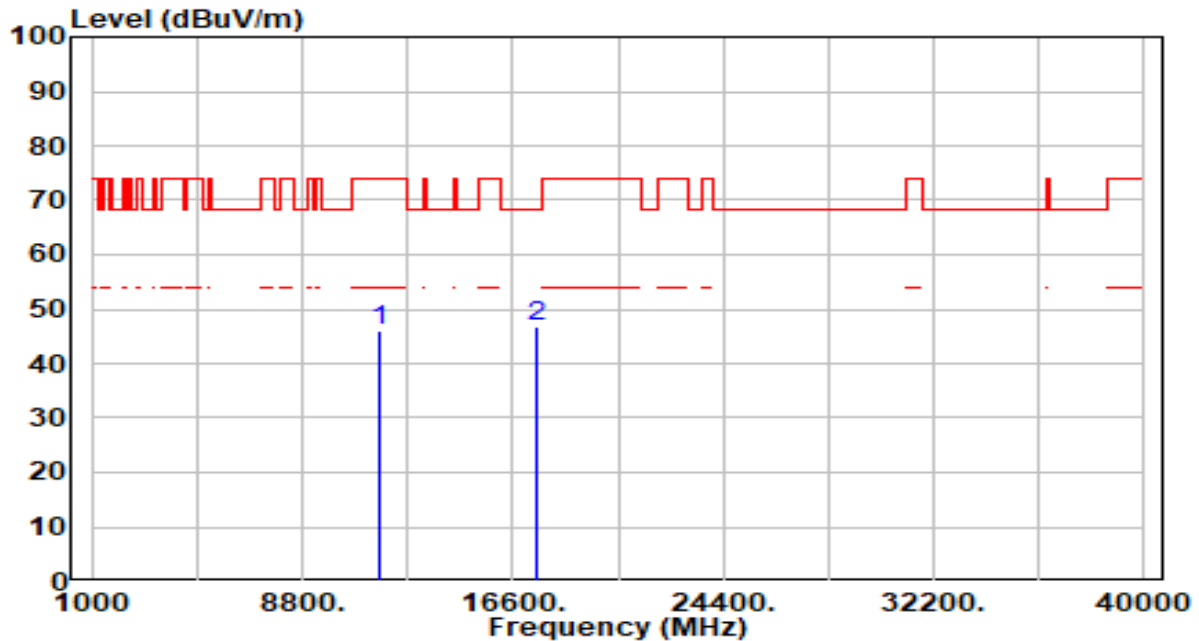


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11650.000	38.98	7.22	46.20	-27.80	74.00	100	53	Peak
2	* 17475.000	39.54	7.41	46.96	-21.24	68.20	100	91	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band4_52Tone_RU74_CH 149_ANT 6+7	Test Voltage	By Notebook PC

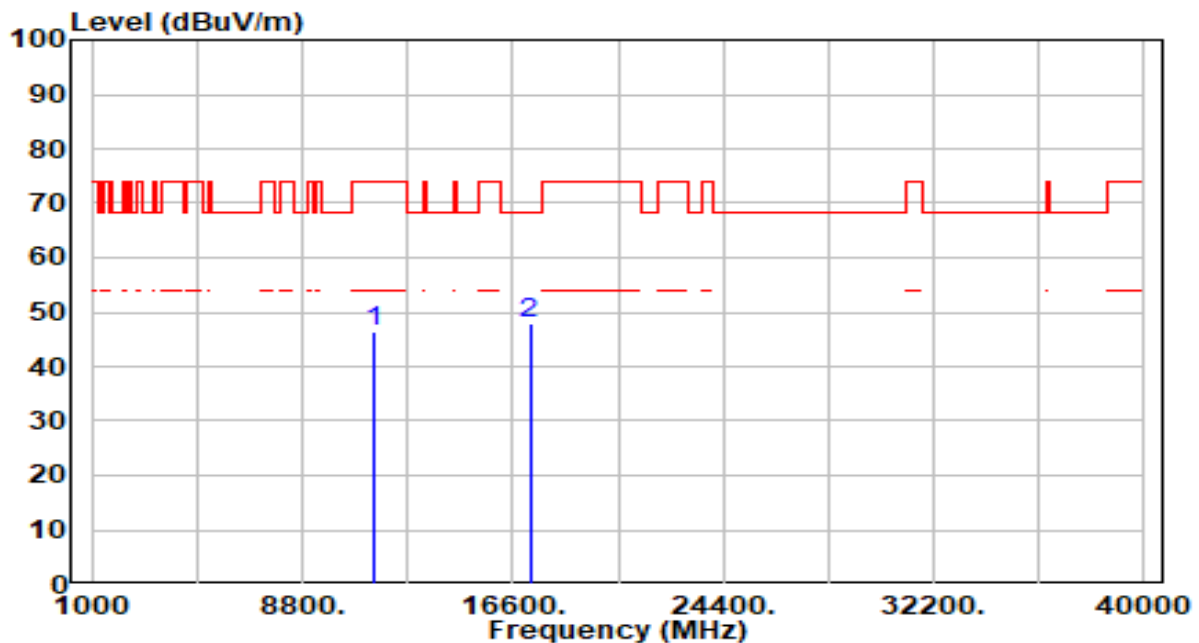


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11490.000	39.21	7.19	46.40	-27.60	74.00	100	360	Peak
2	*	17235.000	40.01	7.87	47.89	-20.31	68.20	100	127	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band4_52Tone_RU74_CH 149_ANT 6+7	Test Voltage	By Notebook PC

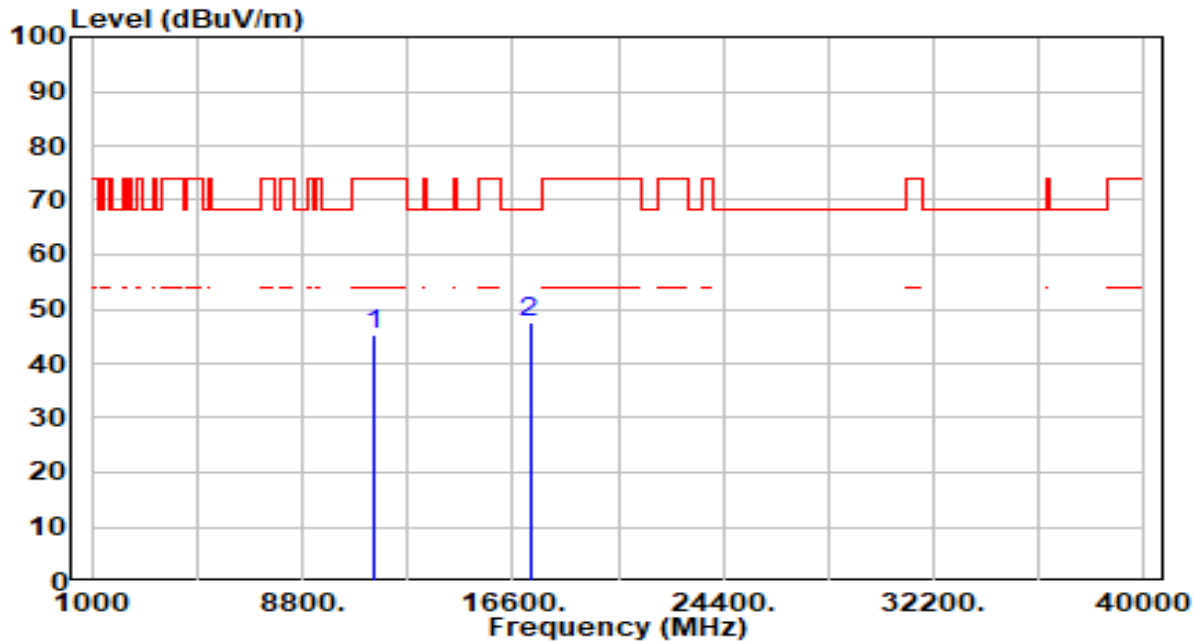


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11490.000	38.08	7.19	45.26	-28.74	74.00	100	30	Peak
2	* 17235.000	39.74	7.87	47.61	-20.59	68.20	100	140	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band4_52Tone_RU77_CH 165_ANT 6+7	Test Voltage	By Notebook PC

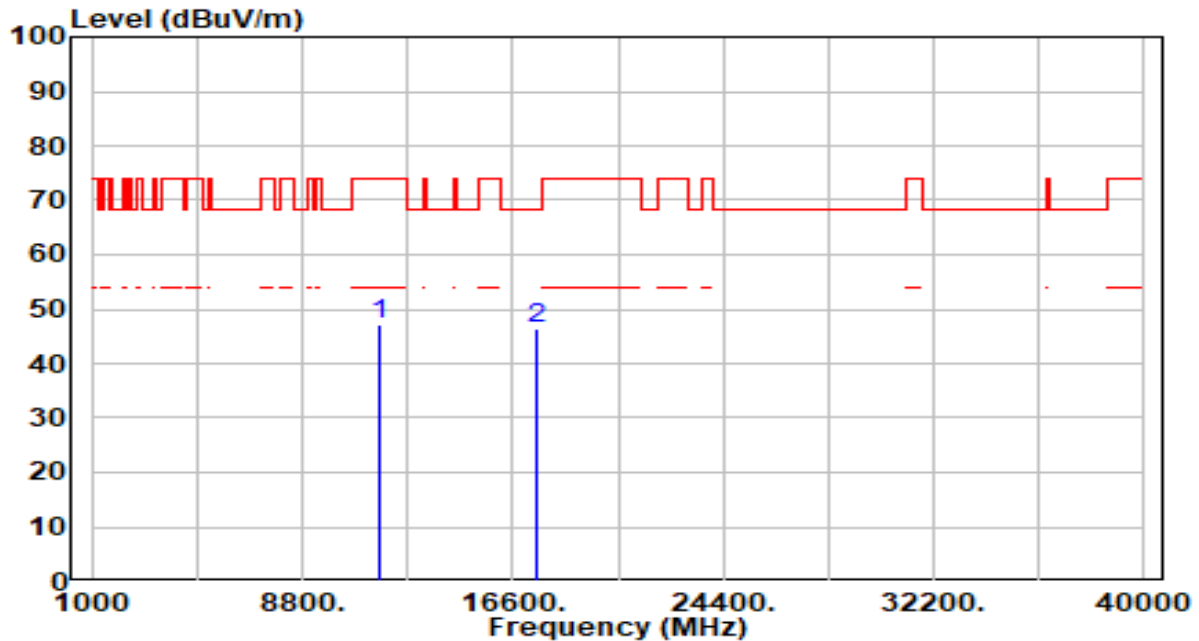


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11650.000	39.86	7.22	47.07	-26.93	74.00	100	125	Peak
2	* 17475.000	39.14	7.41	46.55	-21.65	68.20	100	195	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band4_52Tone_RU77_CH 165_ANT 6+7	Test Voltage	By Notebook PC

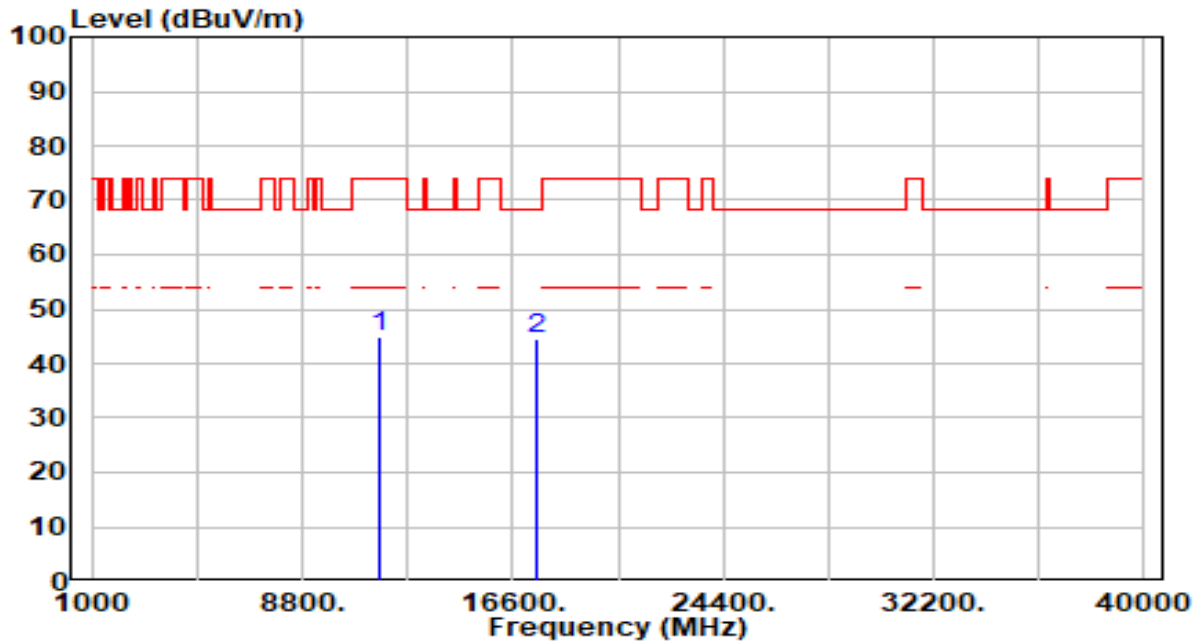


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11650.000	37.69	7.22	44.91	-29.09	74.00	100	0	Peak
2	* 17475.000	37.22	7.41	44.63	-23.57	68.20	100	325	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band4_106Tone_RU106_CH 149_ANT 6+7	Test Voltage	By Notebook PC

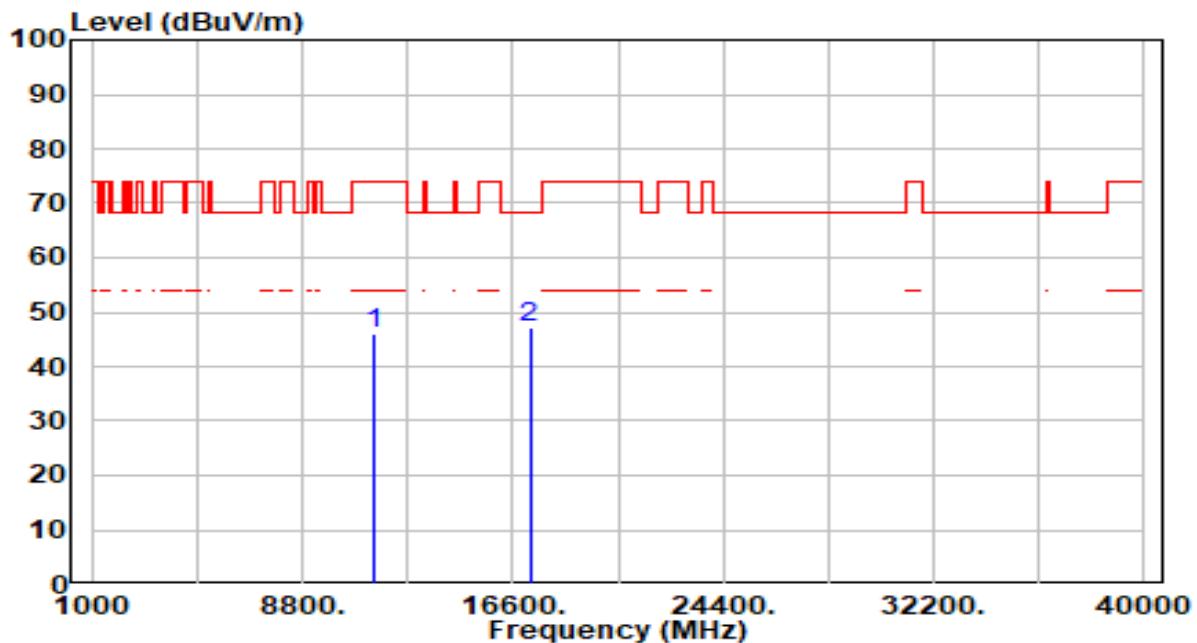


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11490.000	38.67	7.19	45.86	-28.14	74.00	100	166	Peak
2	*	17235.000	39.15	7.87	47.02	-21.18	68.20	100	2	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band4_106Tone_RU106_CH 149_ANT 6+7	Test Voltage	By Notebook PC

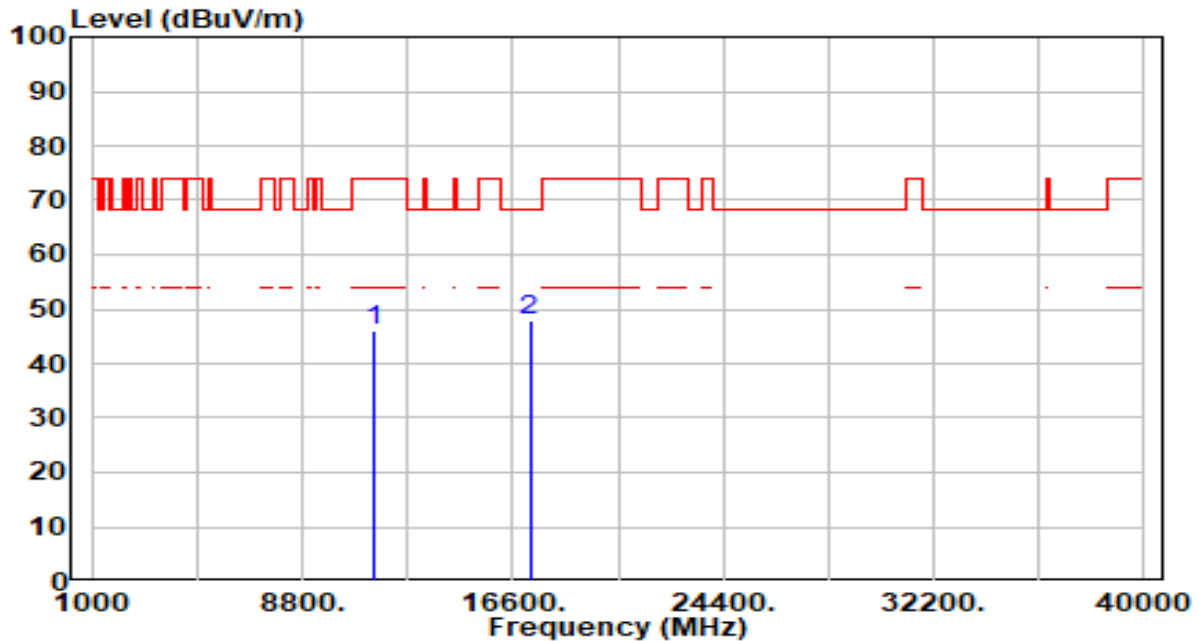


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11490.000	38.73	7.19	45.92	-28.08	74.00	100	0	Peak
2	* 17235.000	39.95	7.87	47.82	-20.38	68.20	100	331	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band4_106Tone_RU107_CH 165_ANT 6+7	Test Voltage	By Notebook PC

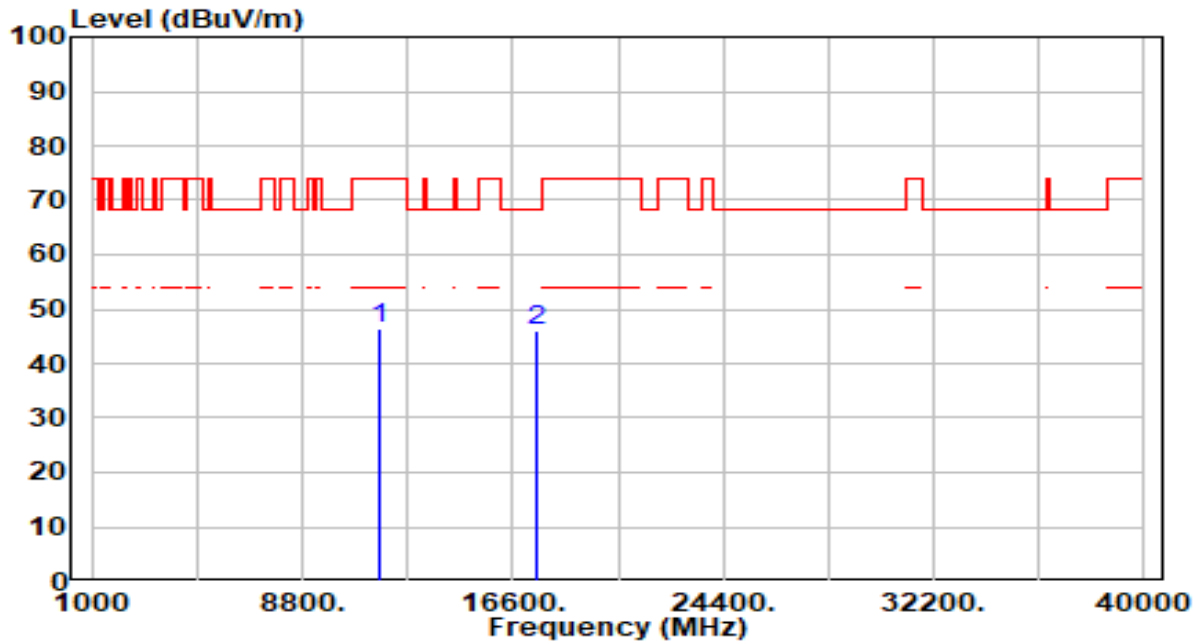


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11650.000	39.13	7.22	46.34	-27.66	74.00	100	324	Peak
2	* 17475.000	38.74	7.41	46.15	-22.05	68.20	100	278	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band4_106Tone_RU107_CH 165_ANT 6+7	Test Voltage	By Notebook PC

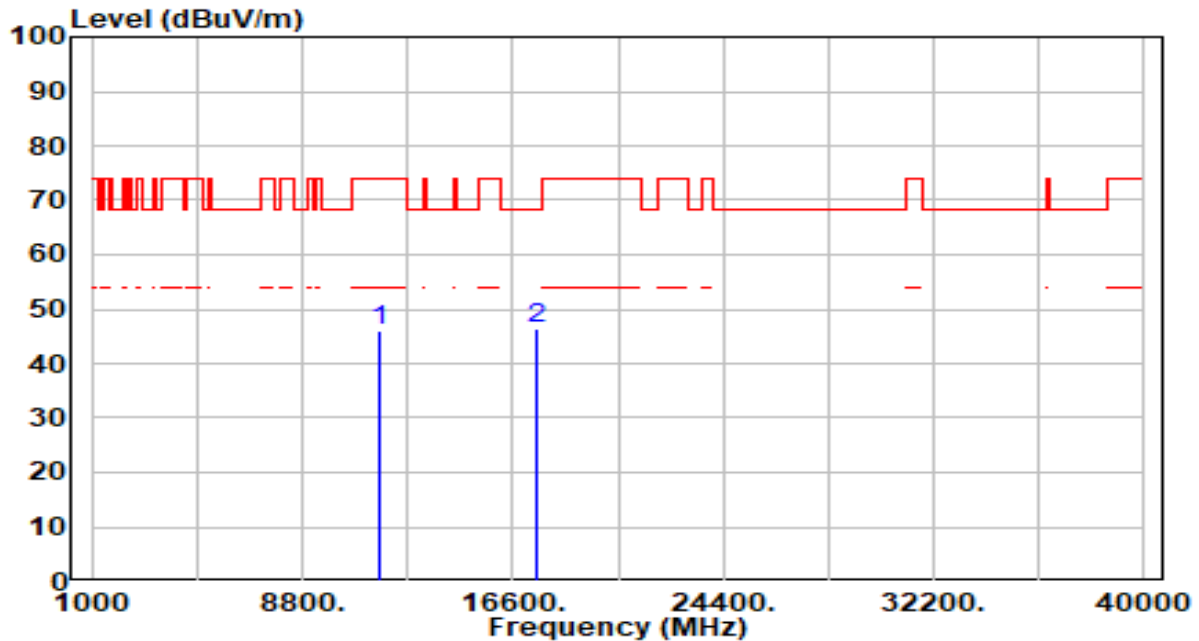


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11650.000	38.66	7.22	45.87	-28.13	74.00	100	306	Peak
2	* 17475.000	38.91	7.41	46.32	-21.88	68.20	100	134	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band4_242Tone_RU122_CH 149_ANT 6+7	Test Voltage	By Notebook PC

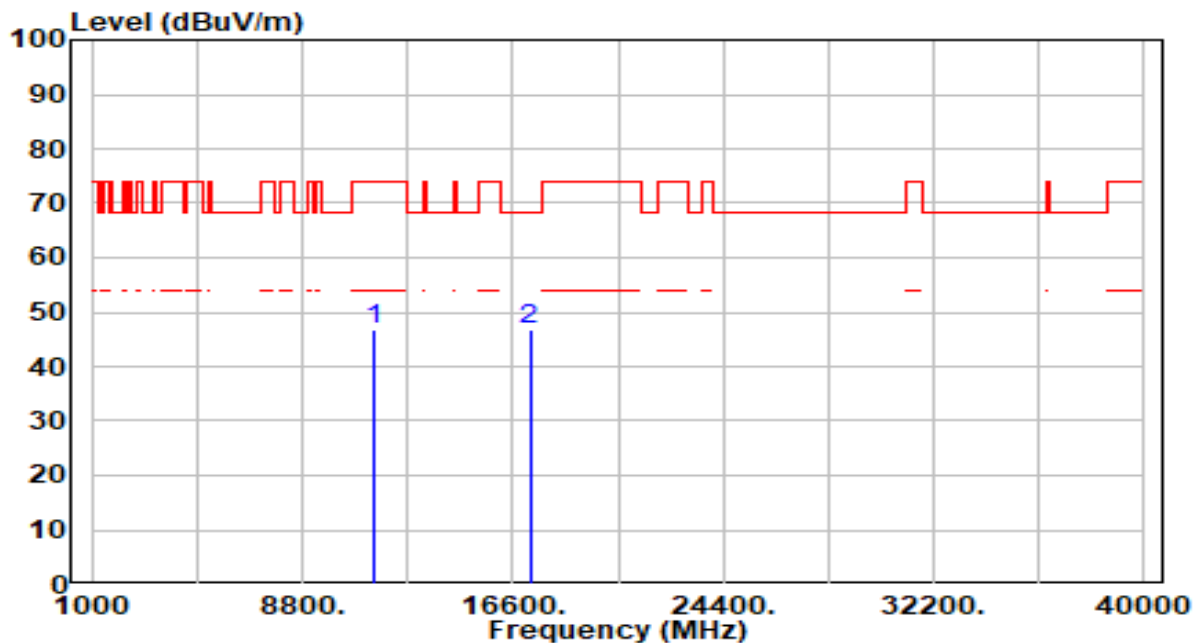


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11490.000	39.47	7.19	46.65	-27.35	74.00	100	99	Peak
2	*	17235.000	38.85	7.87	46.73	-21.47	68.20	100	152	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band4_242Tone_RU122_CH 149_ANT 6+7	Test Voltage	By Notebook PC

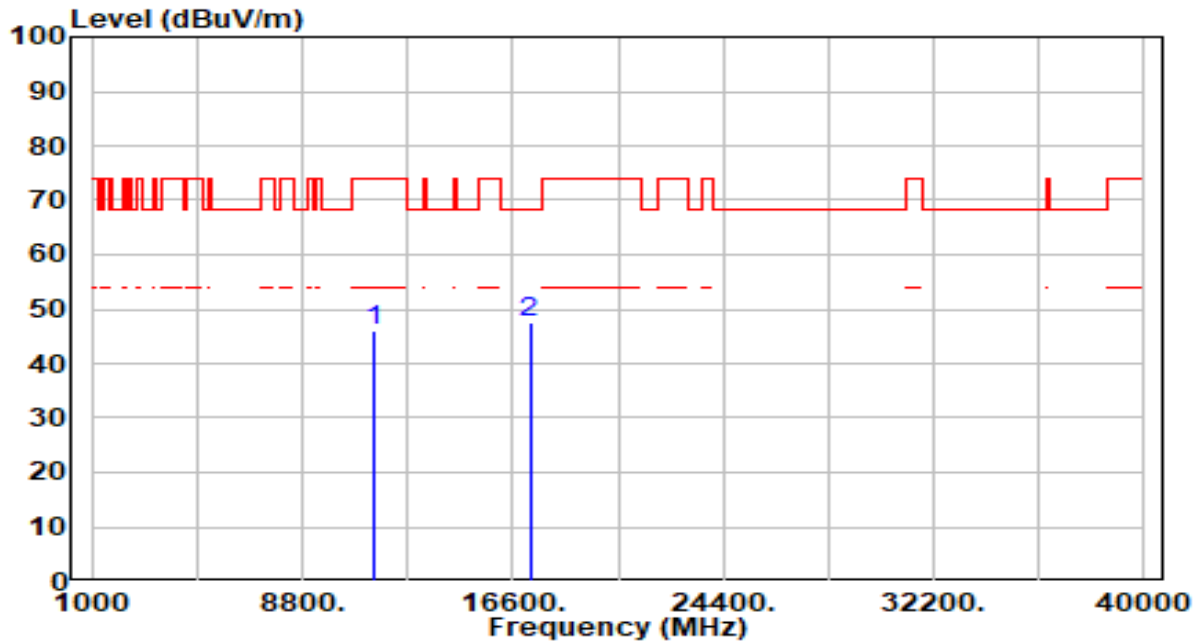


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11490.000	38.81	7.19	46.00	-28.00	74.00	100	231	Peak
2	* 17235.000	39.64	7.87	47.52	-20.68	68.20	100	181	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band4_242Tone_RU122_CH 165_ANT 6+7	Test Voltage	By Notebook PC

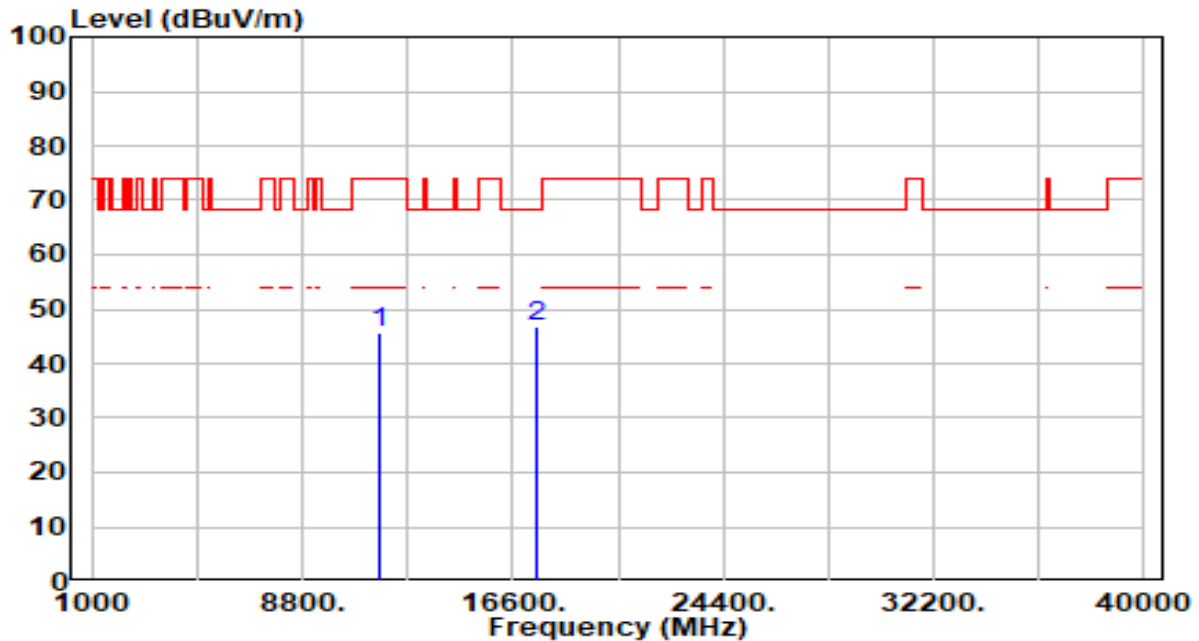


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11650.000	38.49	7.22	45.71	-28.29	74.00	100	61	Peak
2	*	17475.000	39.21	7.41	46.63	-21.57	68.20	100	188	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band4_242Tone_RU122_CH 165_ANT 6+7	Test Voltage	By Notebook PC

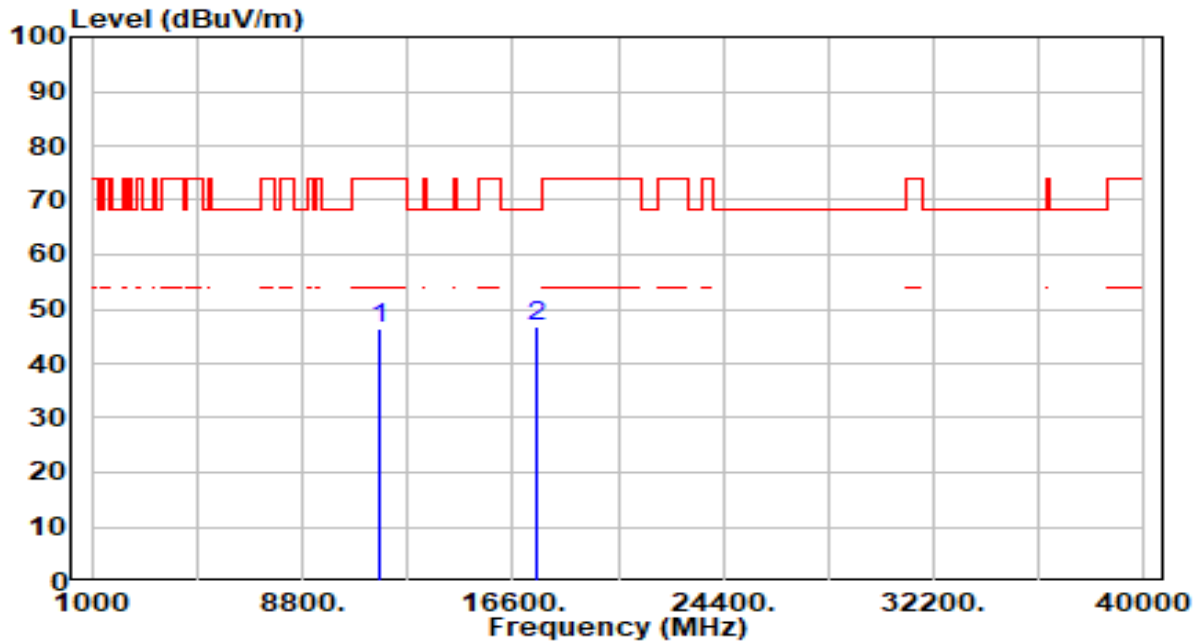


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11650.000	39.11	7.22	46.32	-27.68	74.00	100	0	Peak
2	* 17475.000	39.29	7.41	46.71	-21.49	68.20	100	0	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_52+26Tone_MRUI3_TX_Band1_CH 48_ANT 6+7	Test Voltage	By Notebook PC

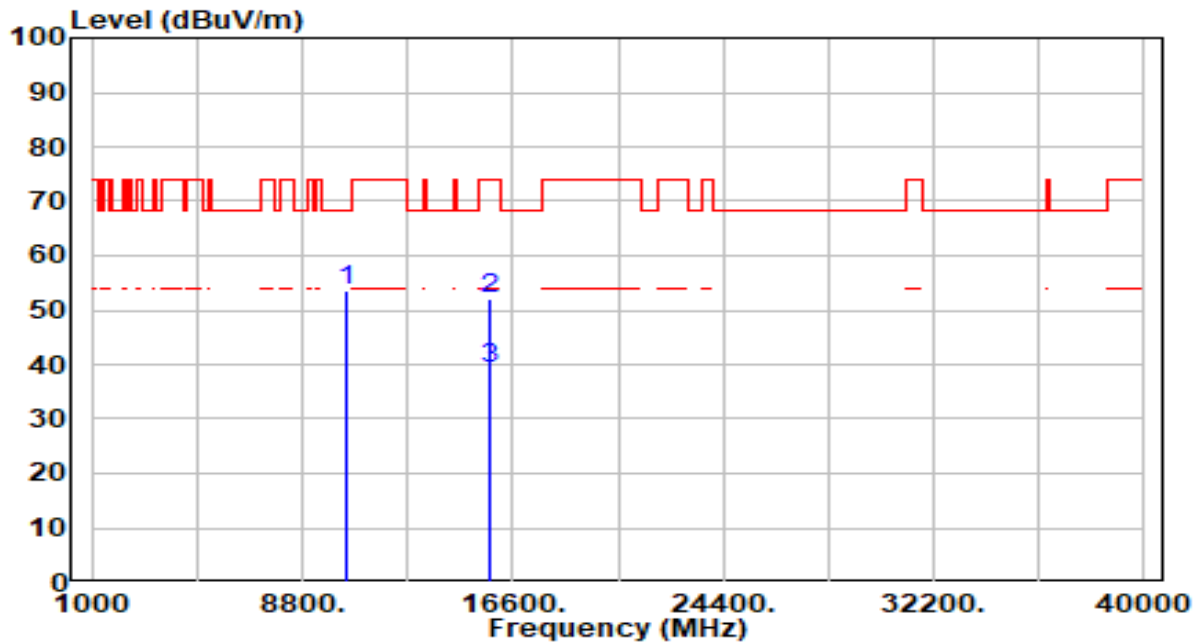


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10480.000	46.89	6.74	53.63	-14.57	68.20	100	196	Peak
2		15720.000	43.24	8.90	52.14	-21.86	74.00	100	78	Peak
3	*	15720.000	30.43	8.90	39.33	-14.67	54.00	100	78	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_52+26Tone_MRUE3_TX_Band1_CH48_ANT 6+7	Test Voltage	By Notebook PC

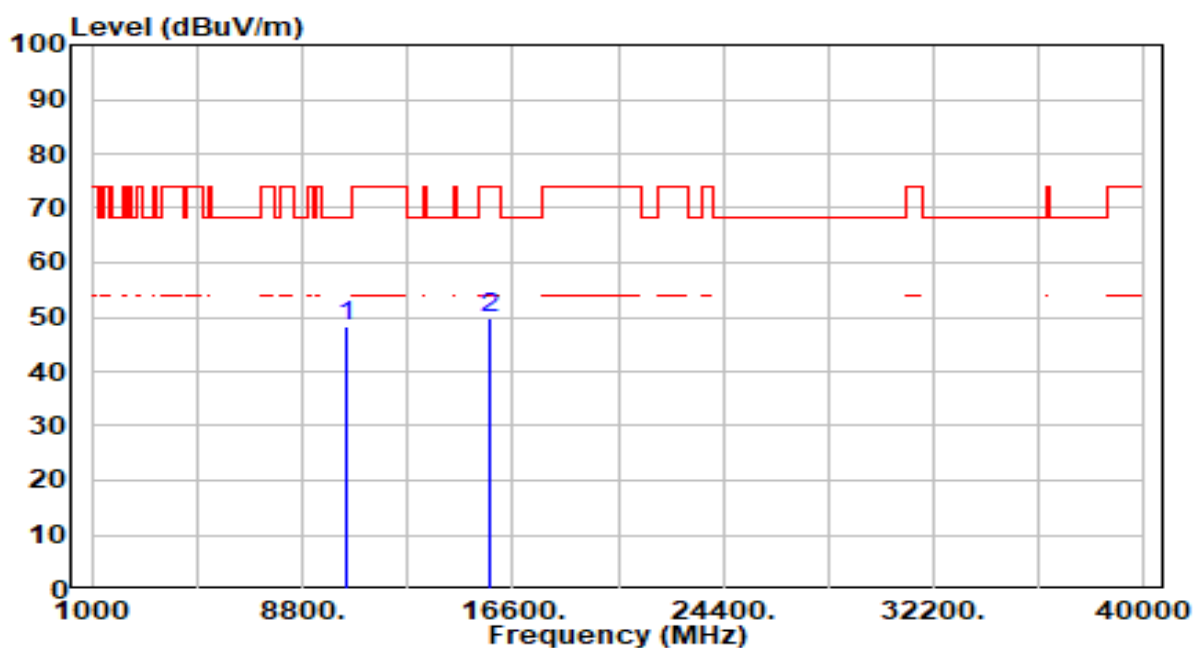


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10480.000	41.47	6.74	48.21	-19.99	68.20	100	312	Peak
2		15720.000	40.83	8.90	49.73	-24.27	74.00	100	33	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_106+26Tone_MRU2_TX_Band1_CH 48_ANT 6+7	Test Voltage	By Notebook PC

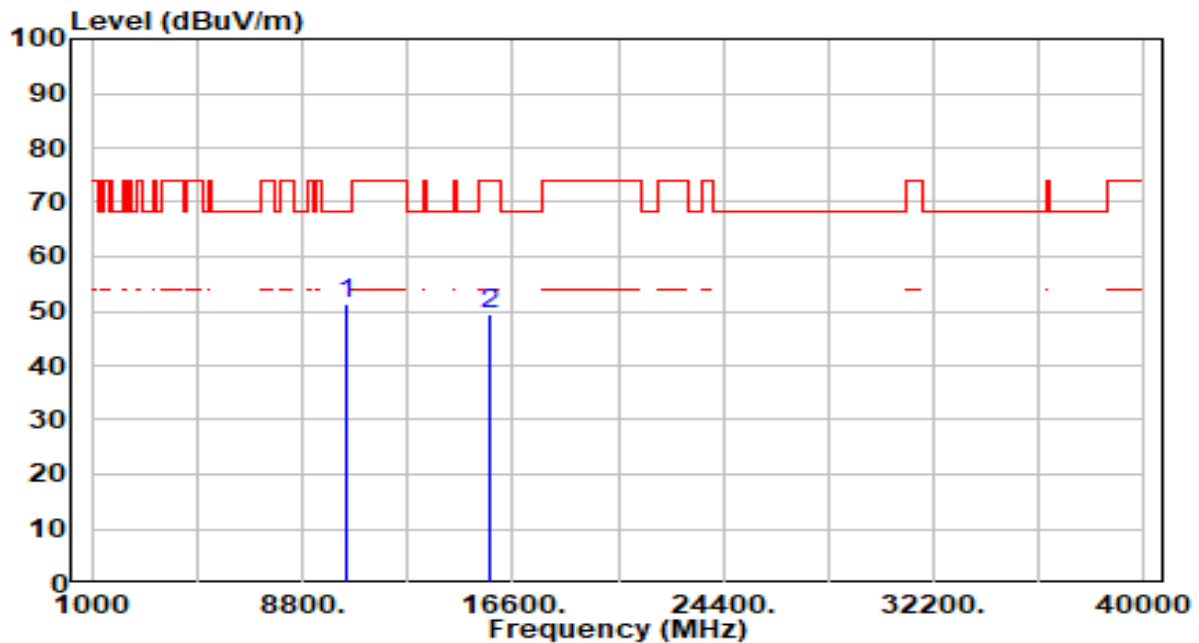


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10480.000	44.44	6.74	51.18	-17.02	68.20	100	148	Peak
2		15720.000	40.69	8.90	49.59	-24.41	74.00	100	138	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_106+26Tone_MRU2_TX_Band1_CH 48_ANT 6+7	Test Voltage	By Notebook PC

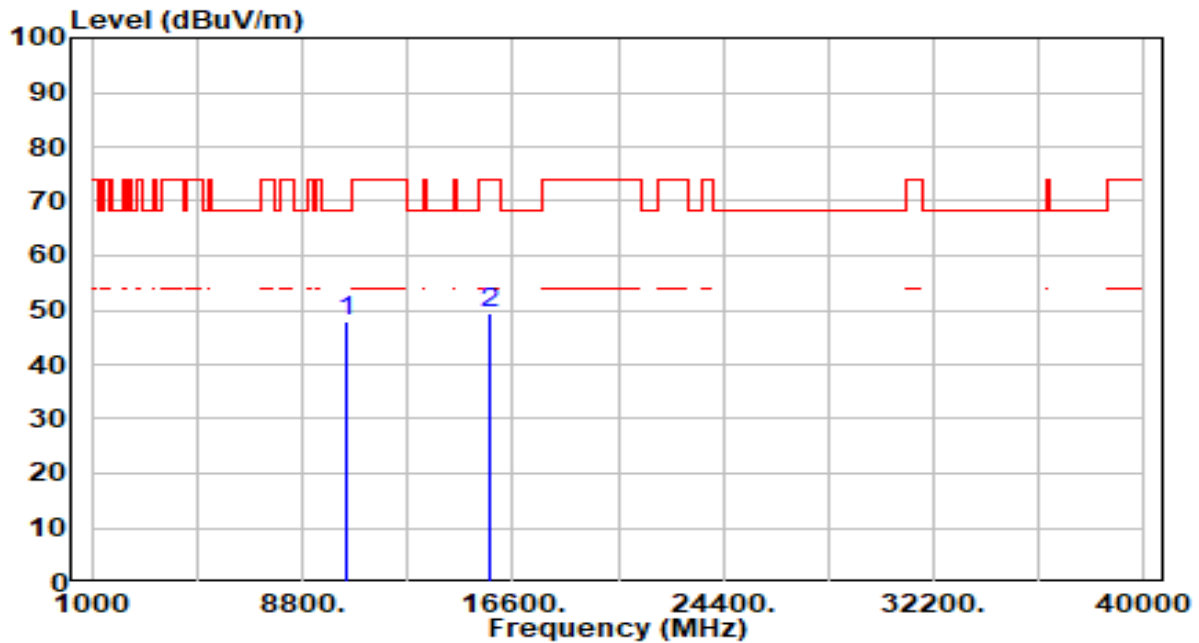


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10480.000	41.37	6.74	48.11	-20.09	68.20	100	23	Peak
2		15720.000	40.36	8.90	49.26	-24.74	74.00	100	52	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_52+26Tone_MRU3_TX_Band3_CH 116_ANT 6+7	Test Voltage	By Notebook PC

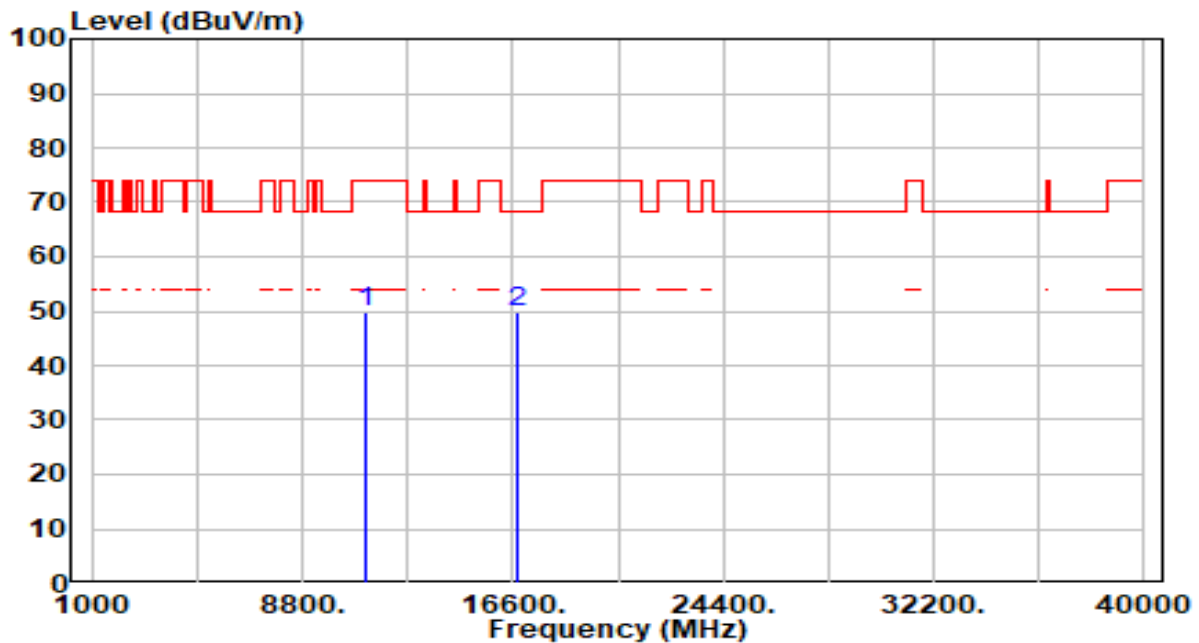


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11160.000	43.15	6.78	49.94	-24.06	74.00	100	180	Peak
2	* 16740.000	41.13	8.71	49.85	-18.35	68.20	100	0	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_52+26Tone_MRU3_TX_Band3_CH 116_ANT 6+7	Test Voltage	By Notebook PC

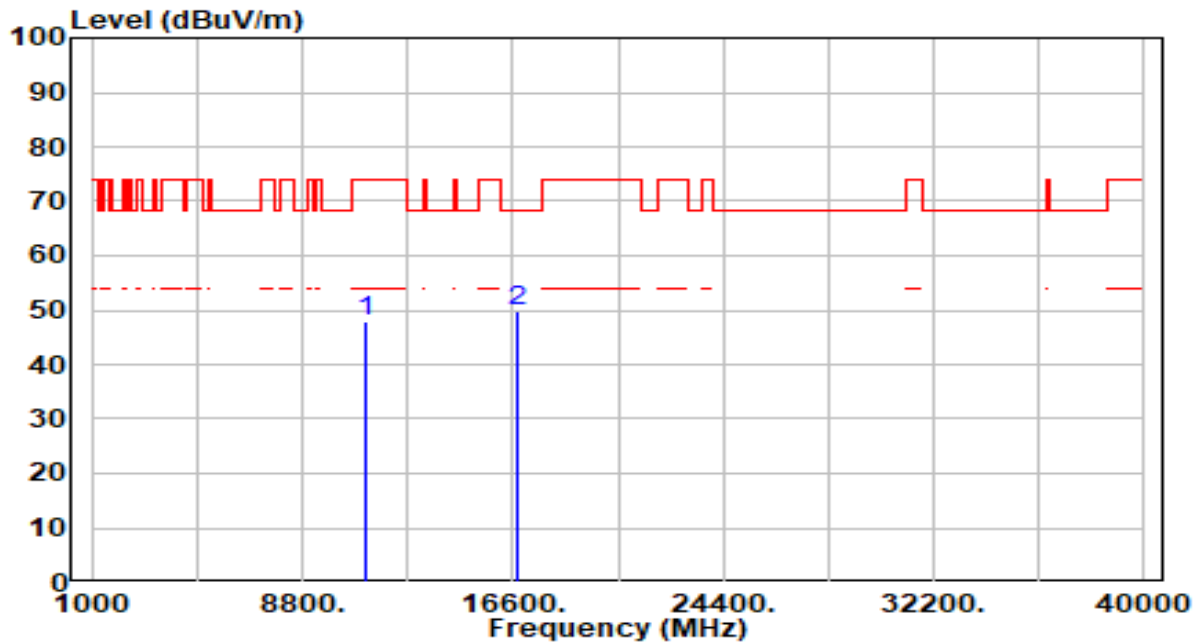


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11160.000	41.09	6.78	47.88	-26.12	74.00	100	266	Peak
2	*	16740.000	41.00	8.71	49.71	-18.49	68.20	100	236	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_106+26Tone_MRU2_TX_Band3_CH 116_ANT 6+7	Test Voltage	By Notebook PC

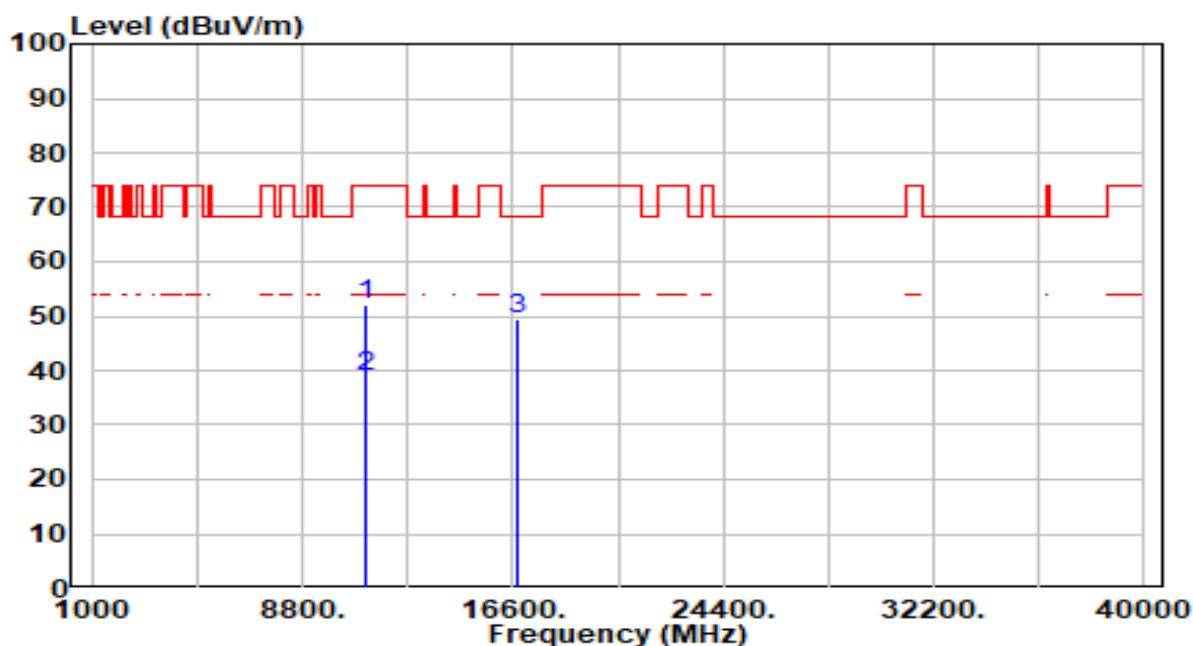


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11160.000	45.29	6.78	52.07	-21.93	74.00	100	243	Peak
2	*	11160.000	31.95	6.78	38.73	-15.27	54.00	100	243	Average
3	*	16740.000	40.76	8.71	49.47	-18.73	68.20	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_106+26Tone_MRU2_TX_Band3_CH116_ANT 6+7	Test Voltage	By Notebook PC

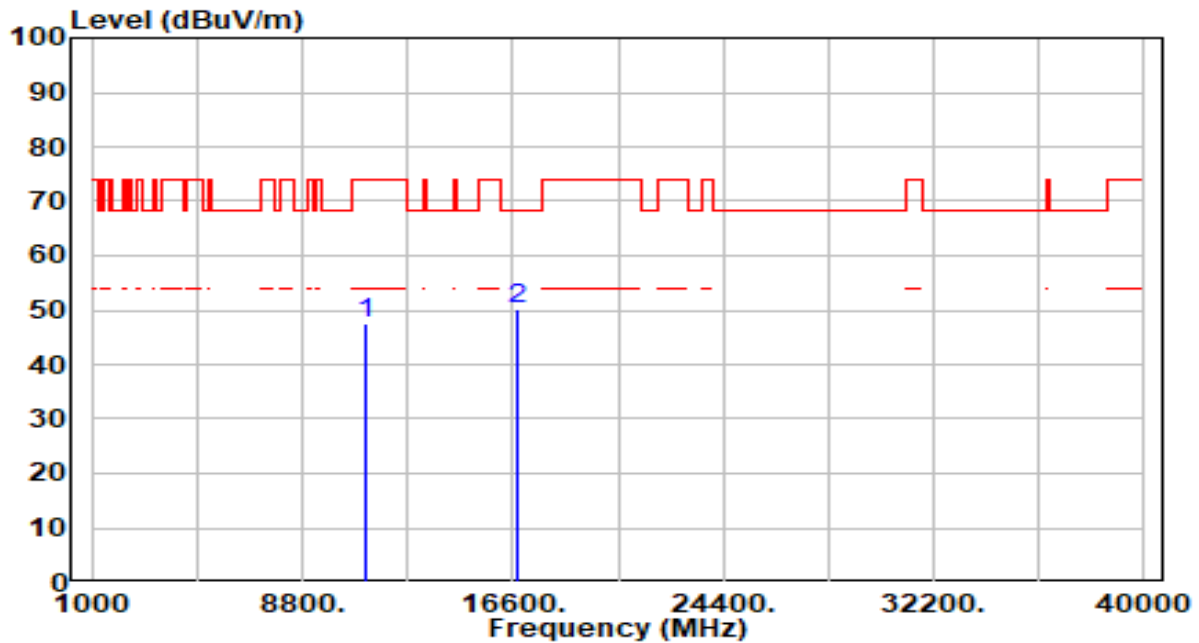


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11160.000	40.64	6.78	47.42	-26.58	74.00	100	238	Peak
2	* 16740.000	41.39	8.71	50.10	-18.10	68.20	100	46	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_52+26Tone_MRU3_TX_Band4_CH 157_ANT 6+7	Test Voltage	By Notebook PC

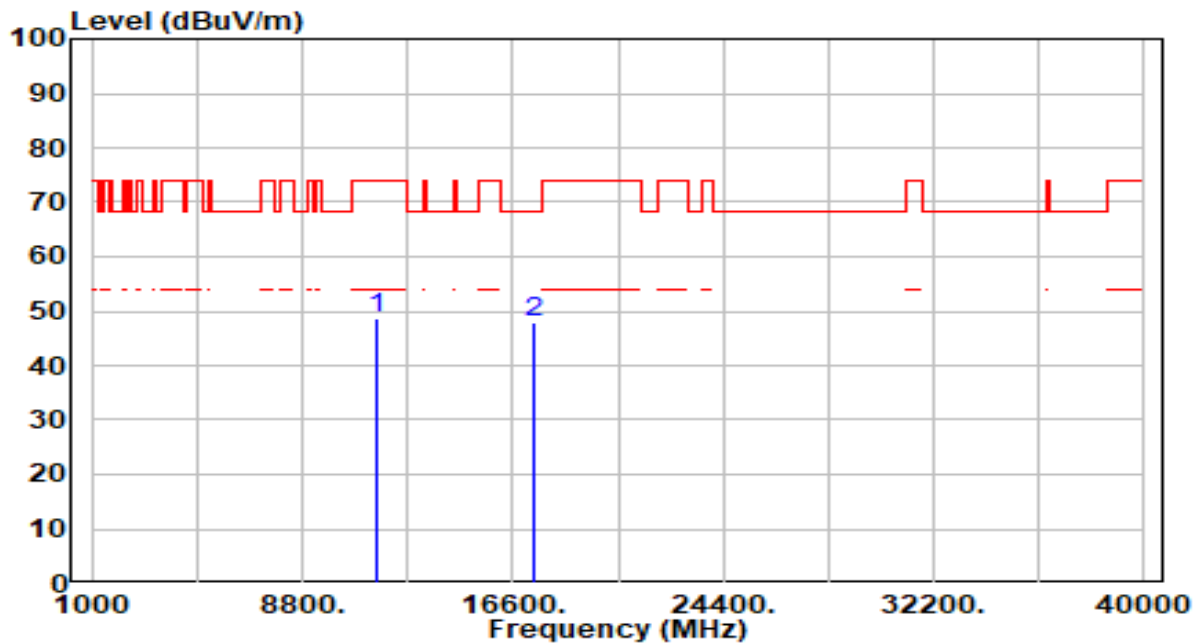


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11570.000	41.39	7.22	48.61	-25.39	74.00	100	99	Peak
2	* 17355.000	40.57	7.35	47.91	-20.29	68.20	100	60	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_52+26Tone_MRU3_TX_Band4_CH 157_ANT 6+7	Test Voltage	By Notebook PC

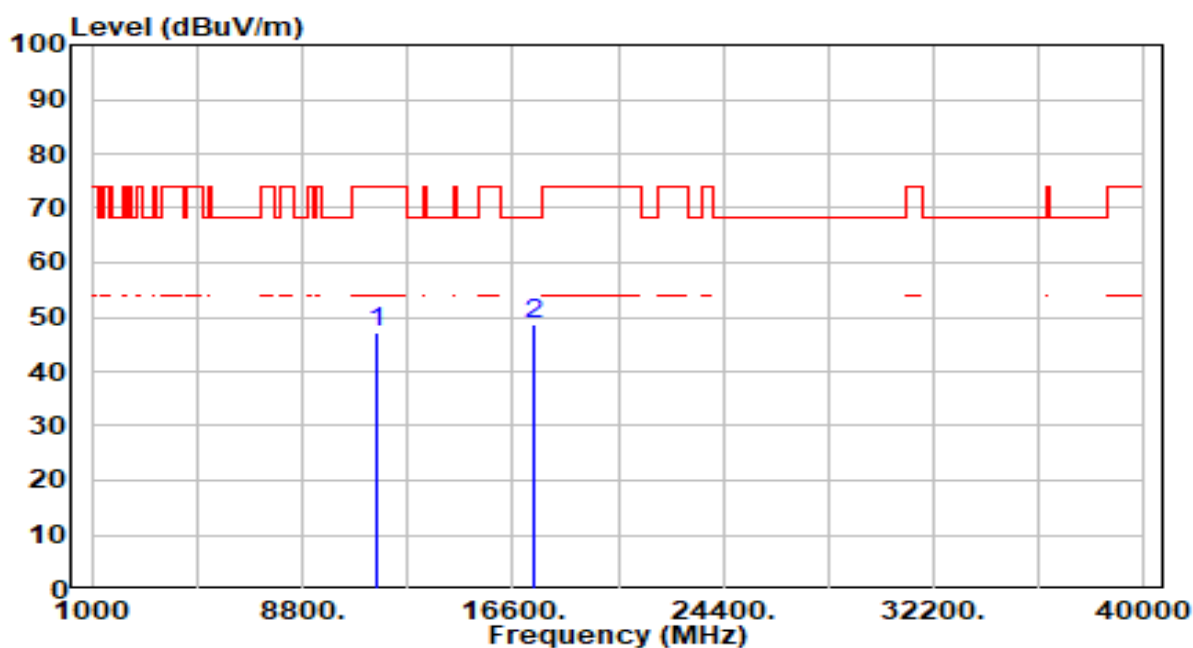


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11570.000	39.99	7.22	47.20	-26.80	74.00	100	81	Peak
2	*	17355.000	41.14	7.35	48.49	-19.71	68.20	100	292	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_106+26Tone_MRU2_TX_Band4_CH 157_ANT 6+7	Test Voltage	By Notebook PC

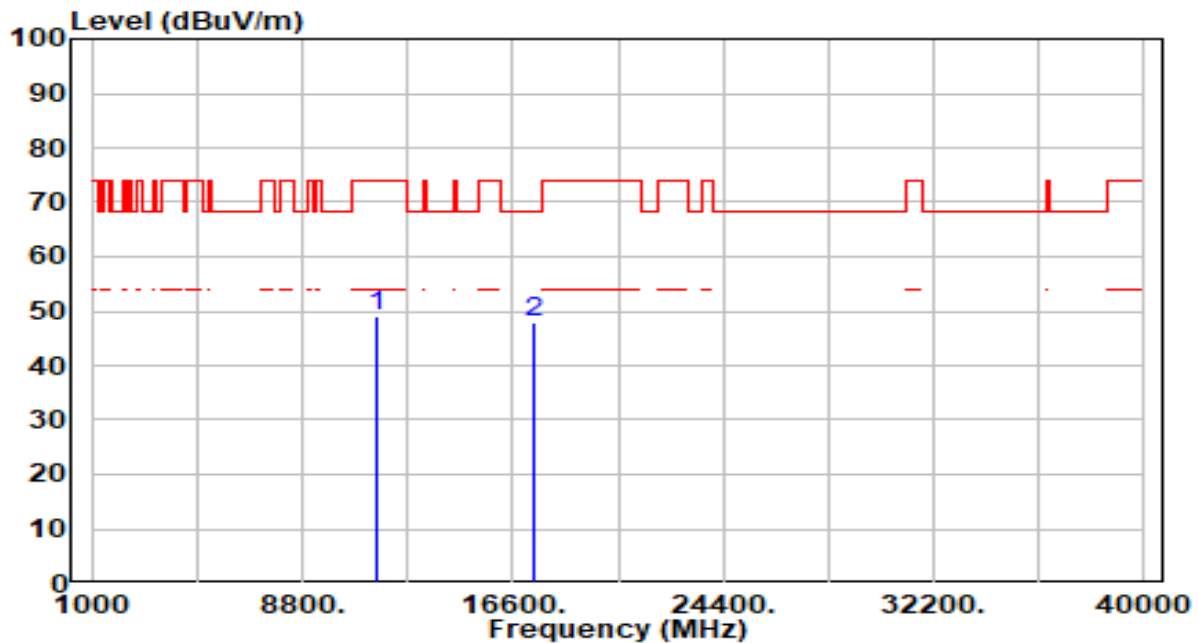


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11570.000	41.95	7.22	49.17	-24.83	74.00	100	161	Peak
2	* 17355.000	40.48	7.35	47.83	-20.37	68.20	100	13	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_106+26Tone_MRU2_TX_Band4_CH 157_ANT 6+7	Test Voltage	By Notebook PC

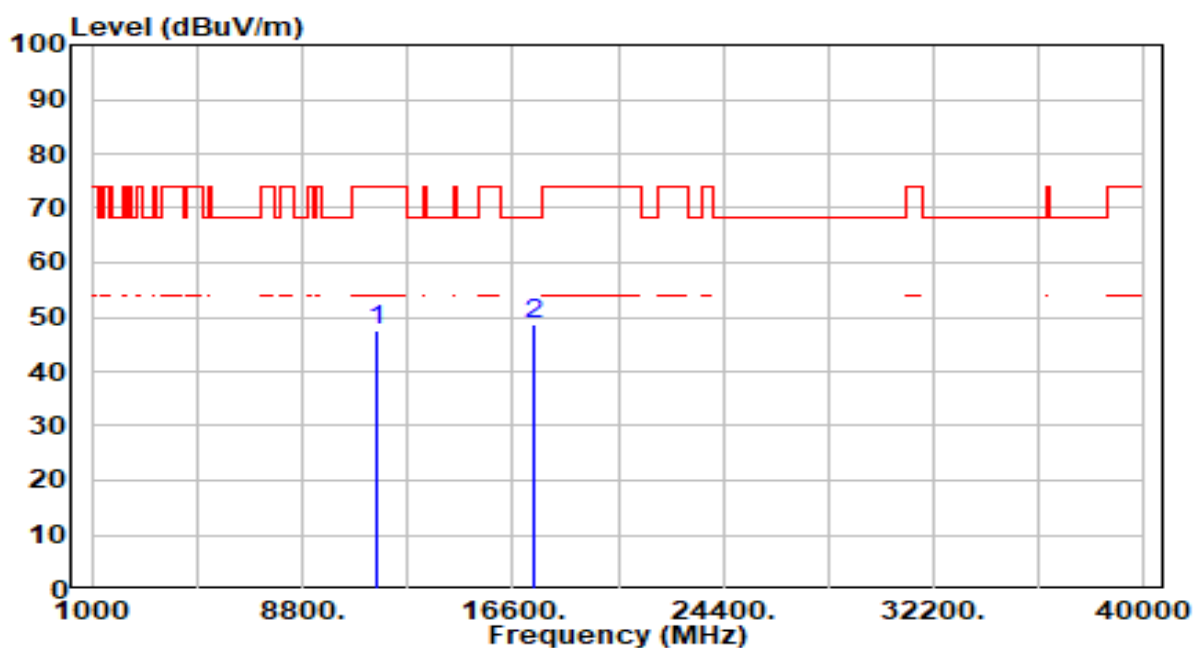


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11570.000	40.27	7.22	47.49	-26.51	74.00	100	8	Peak
2	*	17355.000	41.47	7.35	48.81	-19.39	68.20	100	112	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-80MHz_484+242Tone_MRU3_TX_Band1_CH 42_ANT 6+7	Test Voltage	By Notebook PC

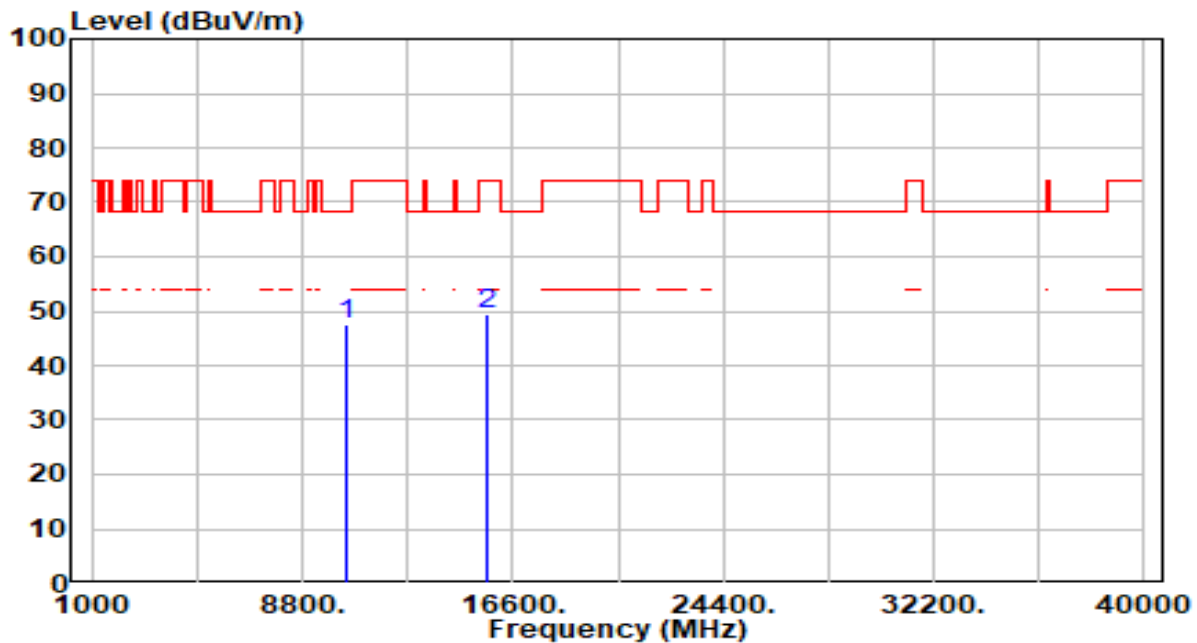


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10420.000	40.81	6.80	47.61	-20.59	68.20	100	179	Peak
2		15630.000	40.61	8.69	49.30	-24.70	74.00	100	110	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-80MHz_484+242Tone_MRU3_TX_Band1_CH 42_ANT 6+7	Test Voltage	By Notebook PC

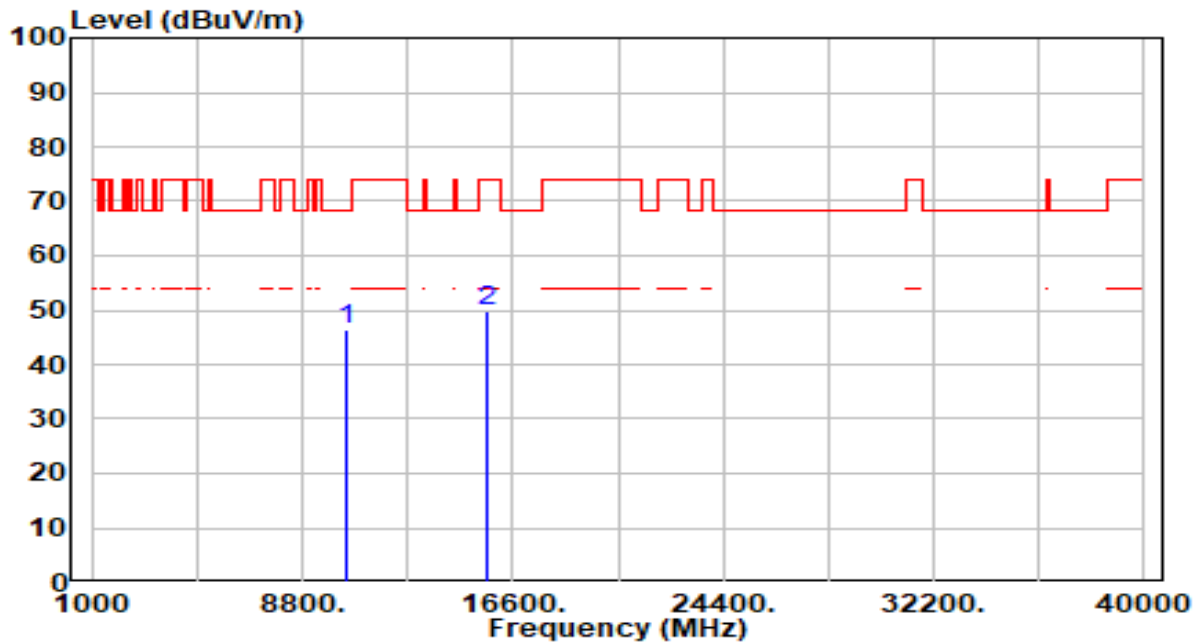


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10420.000	39.60	6.80	46.39	-21.81	68.20	100	306	Peak
2		15630.000	41.05	8.69	49.74	-24.26	74.00	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-80MHz_484+242Tone_MRU3_TX_Band2_CH 58_ANT 6+7	Test Voltage	By Notebook PC

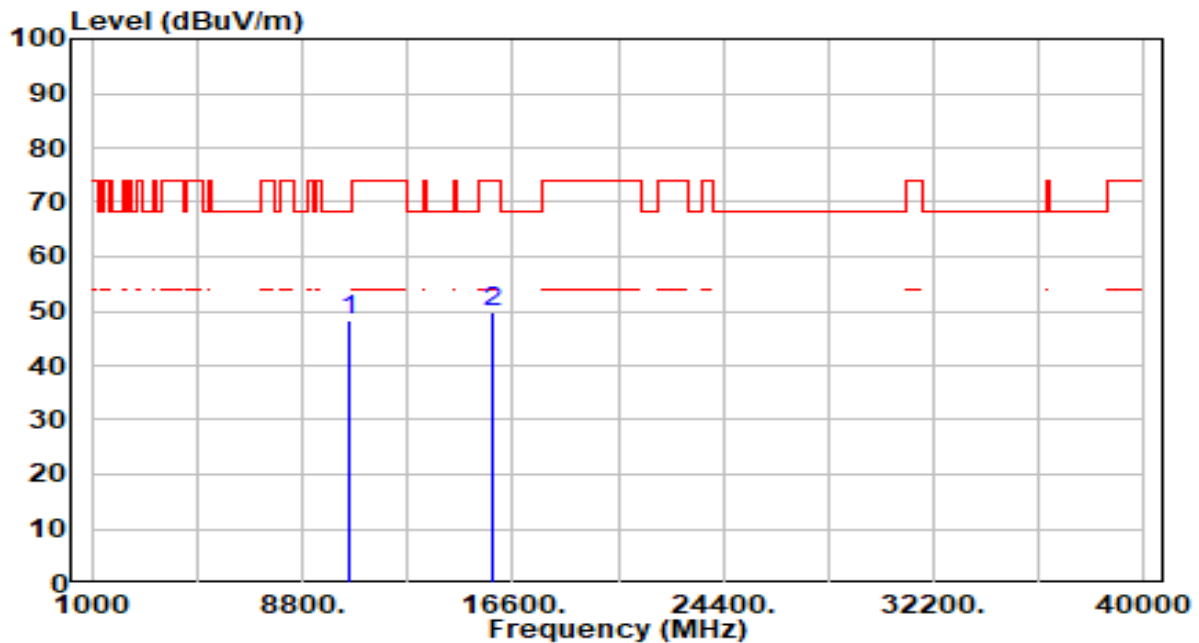


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10580.000	41.55	6.64	48.19	-20.01	68.20	100	66	Peak
2		15870.000	40.74	9.12	49.86	-24.14	74.00	100	42	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-80MHz_484+242Tone_MRU3_TX_Band2_CH 58_ANT 6+7	Test Voltage	By Notebook PC

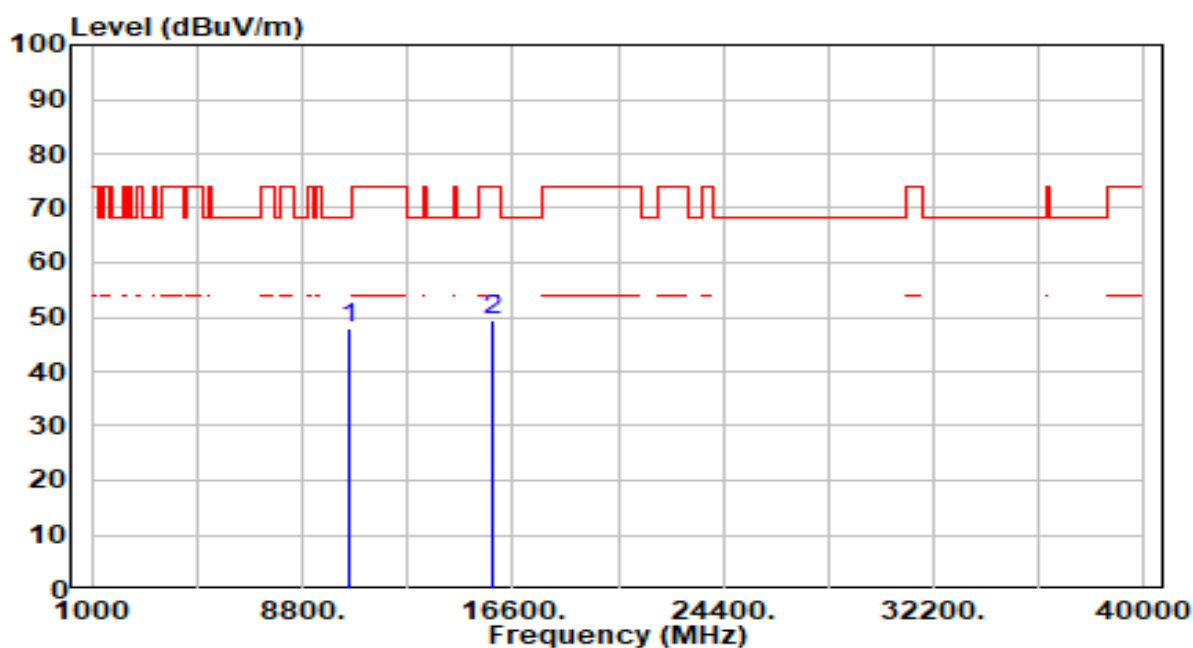


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10580.000	41.32	6.64	47.96	-20.24	68.20	100	360	Peak
2		15870.000	40.38	9.12	49.50	-24.50	74.00	100	107	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-80MHz_484+242Tone_MRU3_TX_Band3_CH 122_ANT 6+7	Test Voltage	By Notebook PC

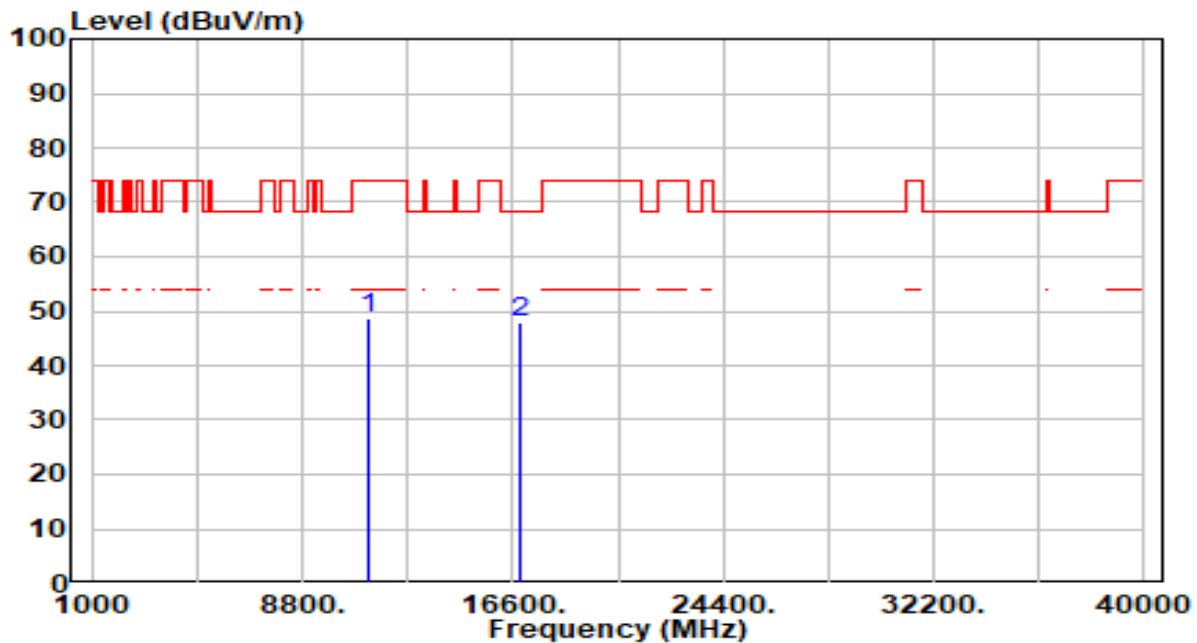


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11220.000	41.68	6.93	48.61	-25.39	74.00	100	151	Peak
2	* 16830.000	39.08	8.70	47.78	-20.42	68.20	100	131	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-80MHz_484+242Tone_MRU3_TX_Band3_CH 122_ANT 6+7	Test Voltage	By Notebook PC

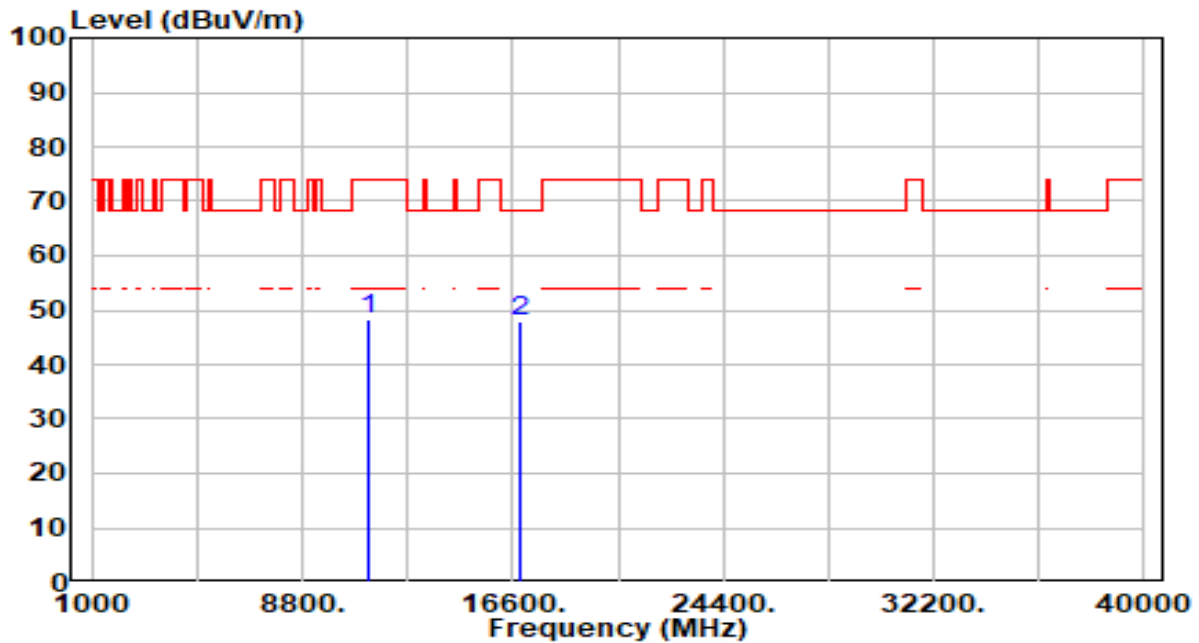


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11220.000	41.21	6.93	48.14	-25.86	74.00	100	111	Peak
2	*	16830.000	39.15	8.70	47.85	-20.35	68.20	100	300	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-820MHz_484+242Tone_MRU3_TX_Band4_CH 155_ANT 6+7	Test Voltage	By Notebook PC

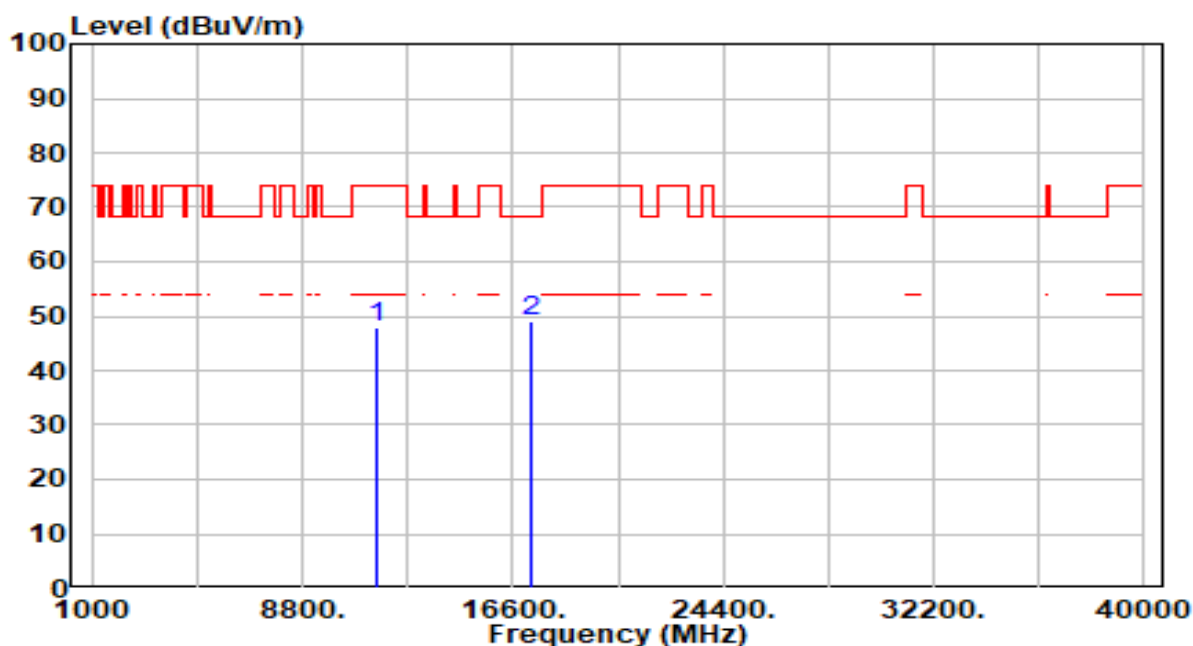


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11550.000	40.69	7.21	47.90	-26.10	74.00	100	351	Peak
2	* 17325.000	41.41	7.50	48.91	-19.29	68.20	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-80MHz_484+242Tone_MRU3_TX_Band4_CH155_ANT 6+7	Test Voltage	By Notebook PC

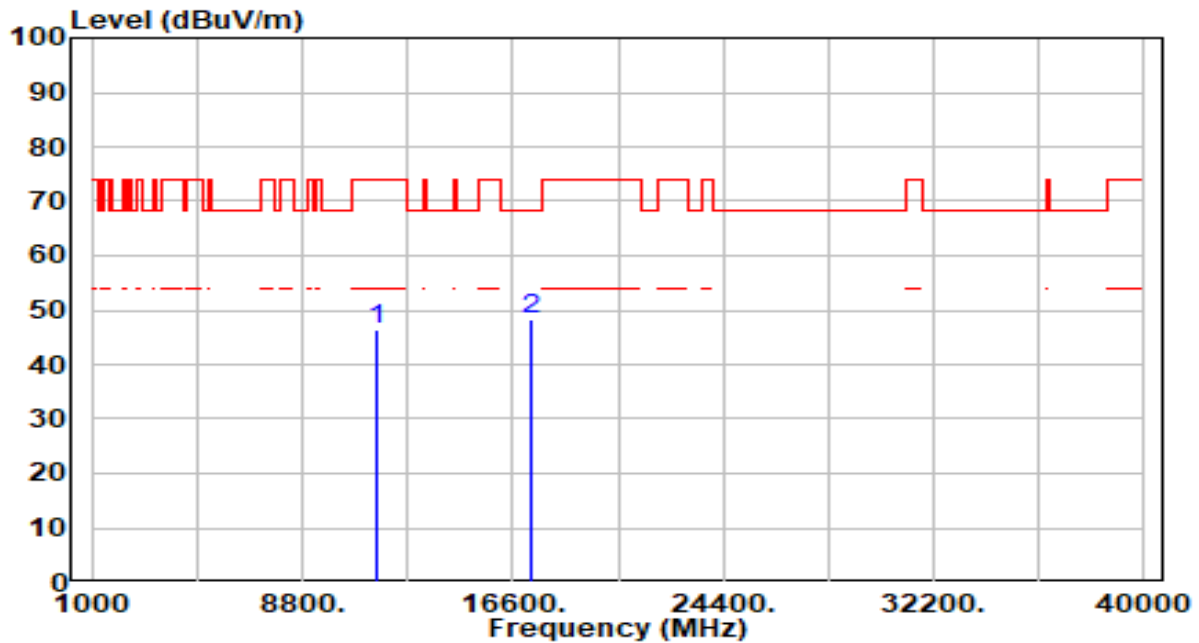


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11550.000	39.19	7.21	46.40	-27.60	74.00	100	23	Peak
2	*	17325.000	40.89	7.50	48.39	-19.81	68.20	100	347	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_996+484Tone_MRU3_TX_Band1,2_CH 50_ANT 6+7	Test Voltage	By Notebook PC

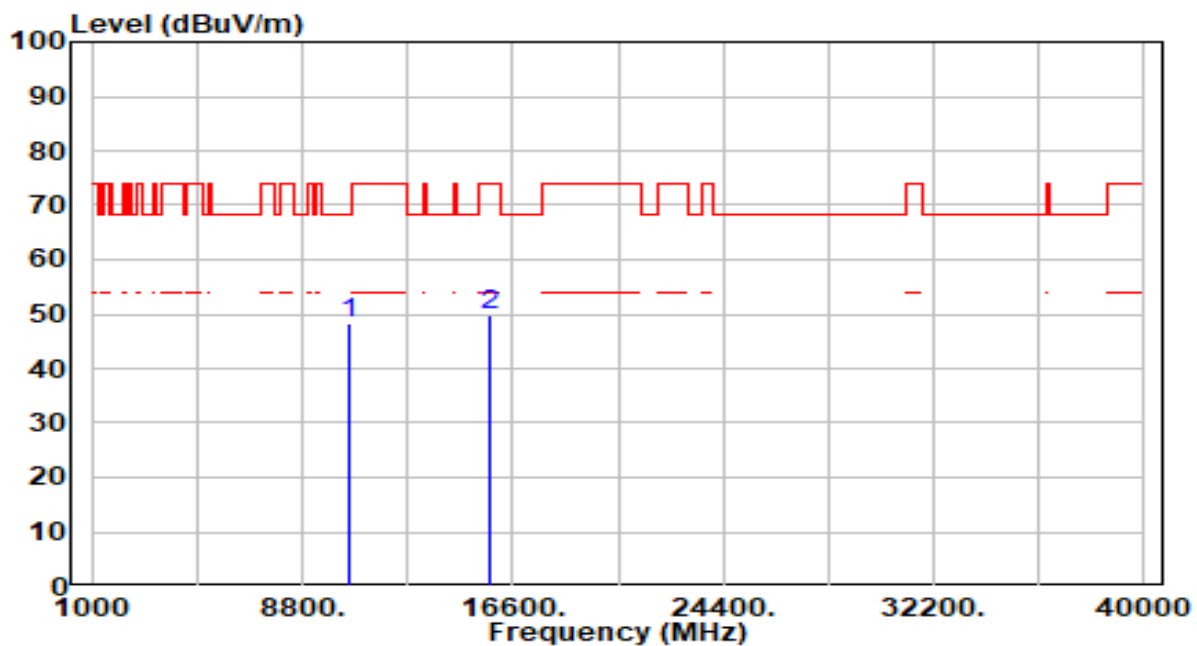


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10500.000	41.47	6.71	48.19	-20.01	68.20	100	219	Peak
2		15750.000	40.73	8.95	49.69	-24.31	74.00	100	116	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_996+484Tone_MRU3_TX_Band1,2_CH 50_ANT 6+7	Test Voltage	By Notebook PC

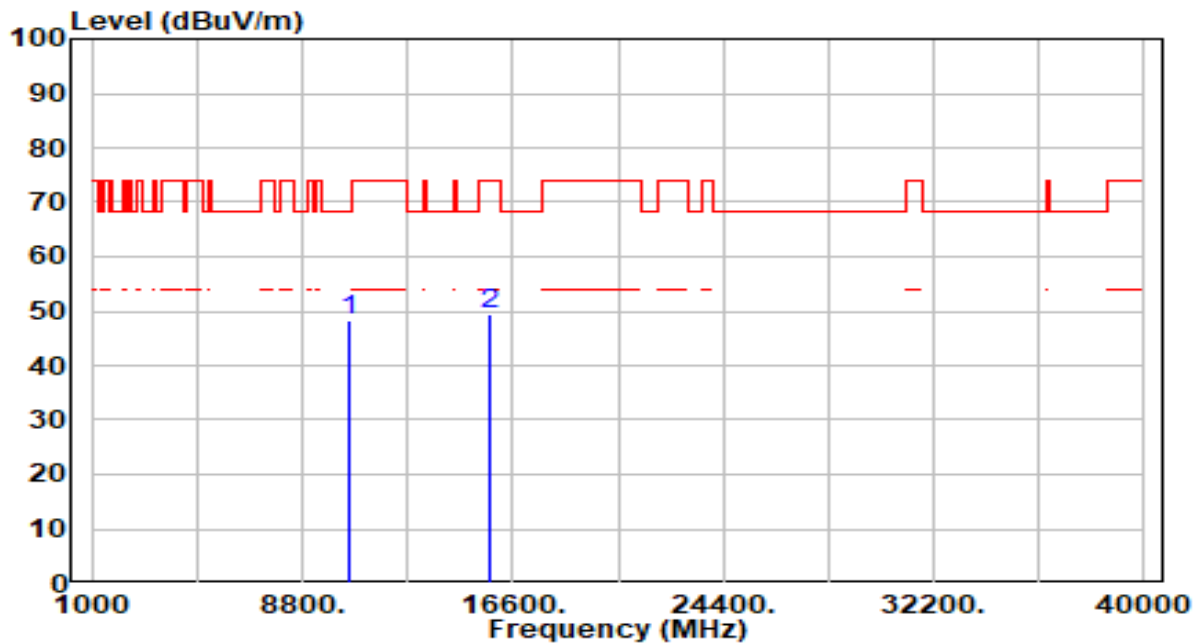


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10500.000	41.42	6.71	48.13	-20.07	68.20	100	103	Peak
2		15750.000	40.62	8.95	49.57	-24.43	74.00	100	14	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_996+484Tone_MRU3_TX_Band3_CH114_ANT 6+7	Test Voltage	By Notebook PC

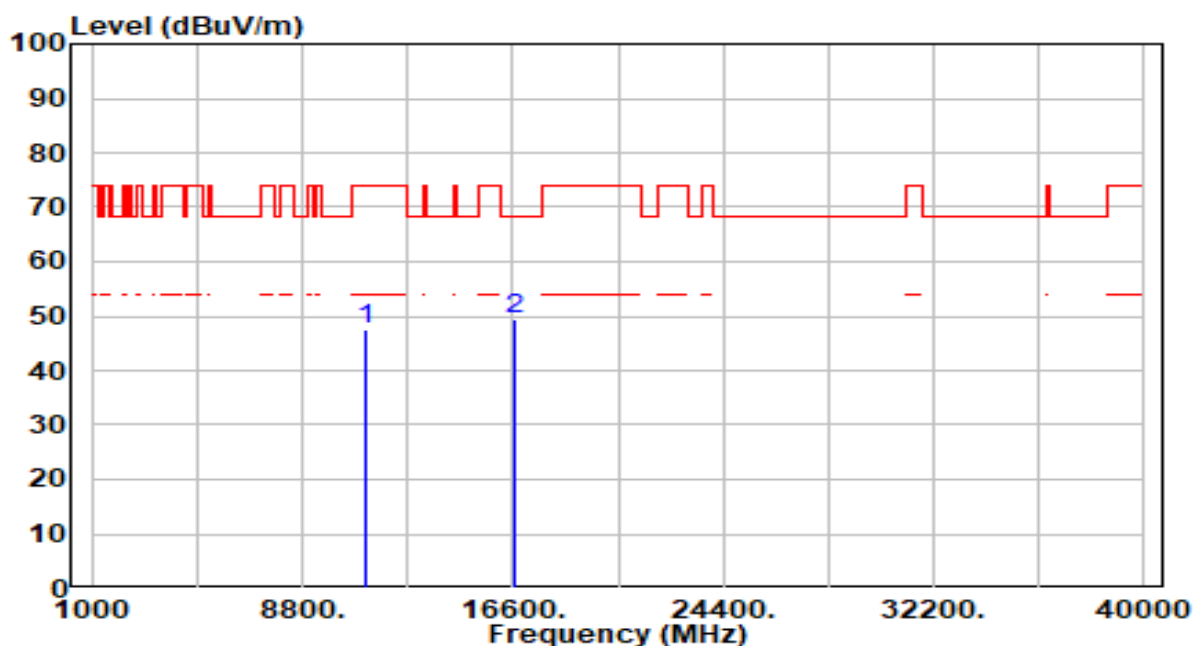


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11140.000	41.00	6.73	47.73	-26.27	74.00	100	268	Peak
2	* 16710.000	40.87	8.70	49.57	-18.63	68.20	100	318	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_996+484Tone_MRU3_TX_Band3_CH114_ANT 6+7	Test Voltage	By Notebook PC

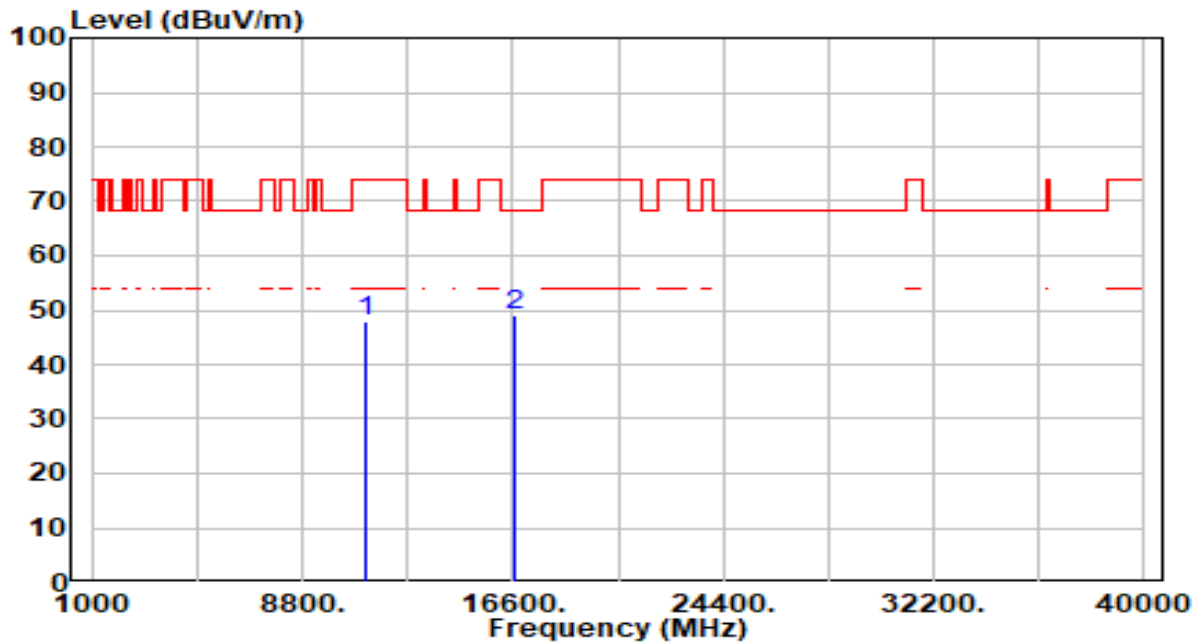


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11140.000	41.19	6.73	47.92	-26.08	74.00	100	0	Peak
2	*	16710.000	40.25	8.70	48.95	-19.25	68.20	100	79	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-14
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-80MHz_484+242_PUN1_TX_Band1_CH 42_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

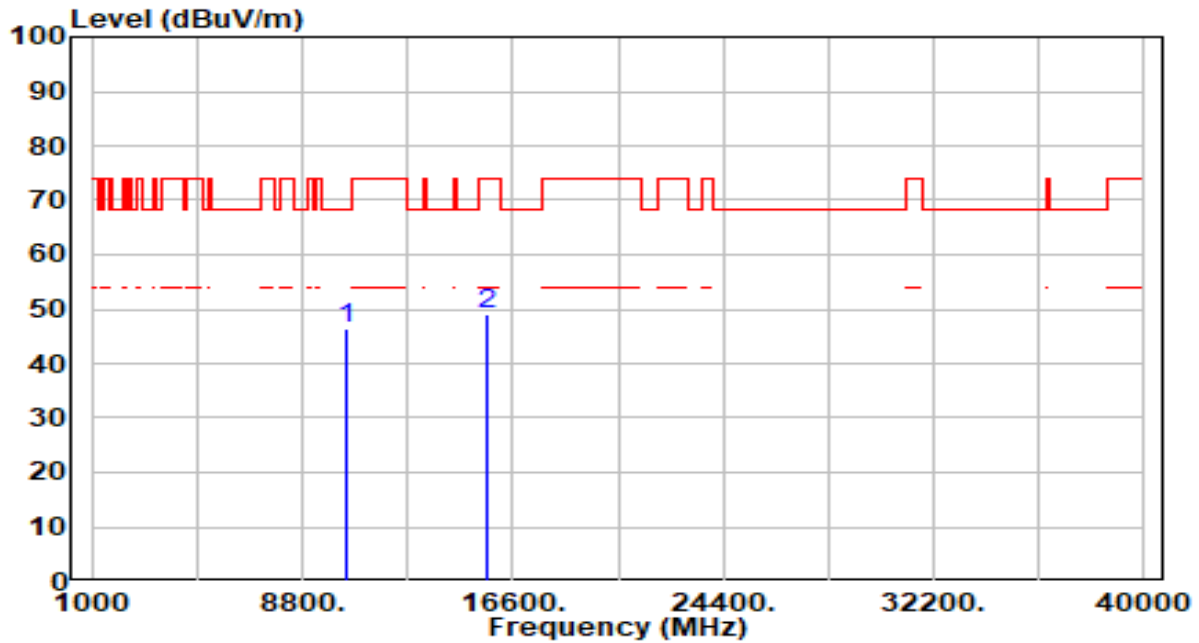


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10420.000	39.74	6.80	46.54	-21.66	68.20	100	360	Peak
2		15630.000	40.36	8.69	49.05	-24.95	74.00	100	111	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-14
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-80MHz_484+242_PUN1_TX_Band1_CH 42_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

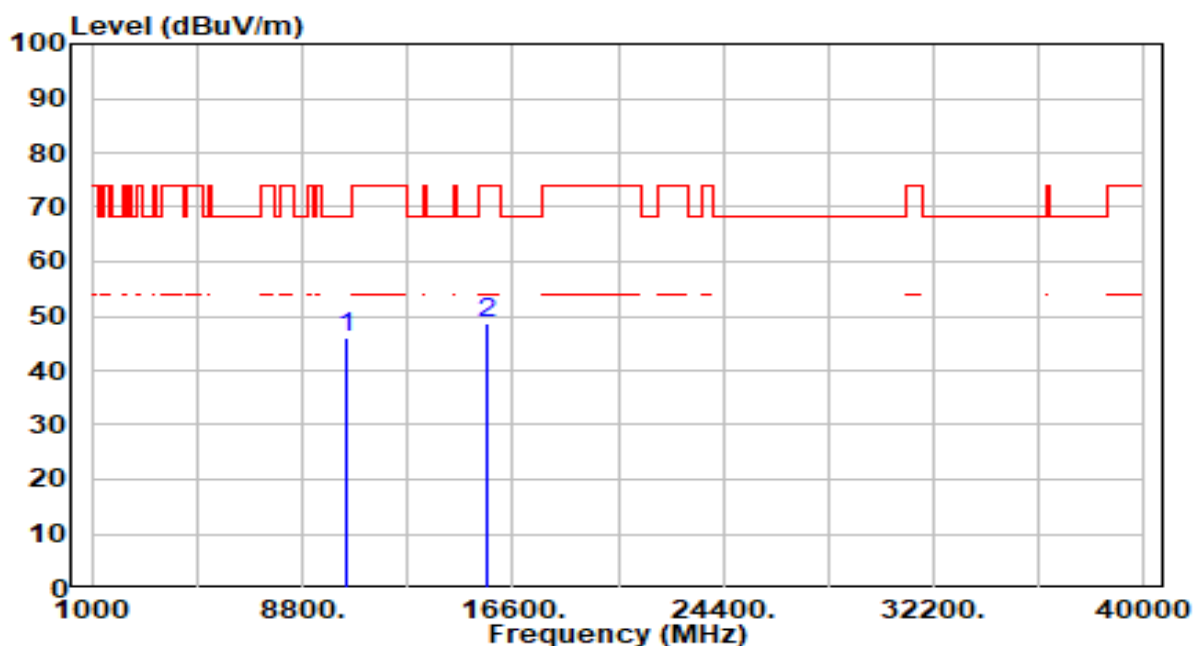


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10420.000	39.06	6.80	45.85	-22.35	68.20	100	360	Peak
2		15630.000	40.06	8.69	48.75	-25.25	74.00	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-14
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-80MHz_484+242_PUN1_TX_Band2_CH 58_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

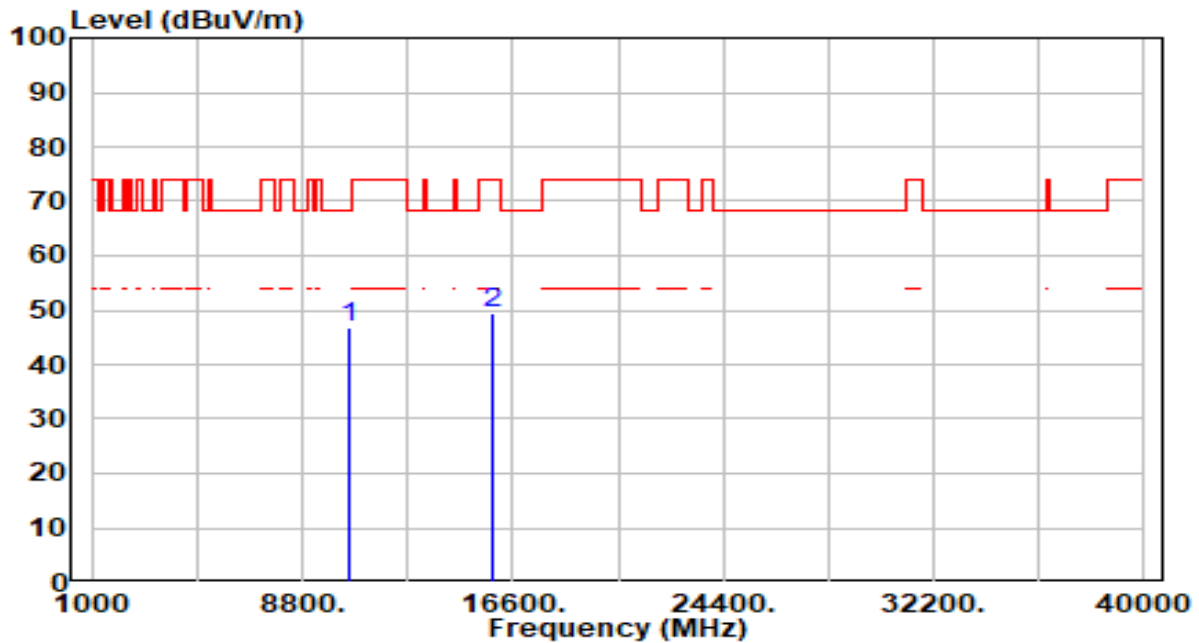


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10580.000	40.00	6.64	46.64	-21.56	68.20	100	232	Peak
2		15870.000	40.23	9.12	49.36	-24.64	74.00	100	273	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-14
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-80MHz_484+242_PUN1_TX_Band2_CH 58_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

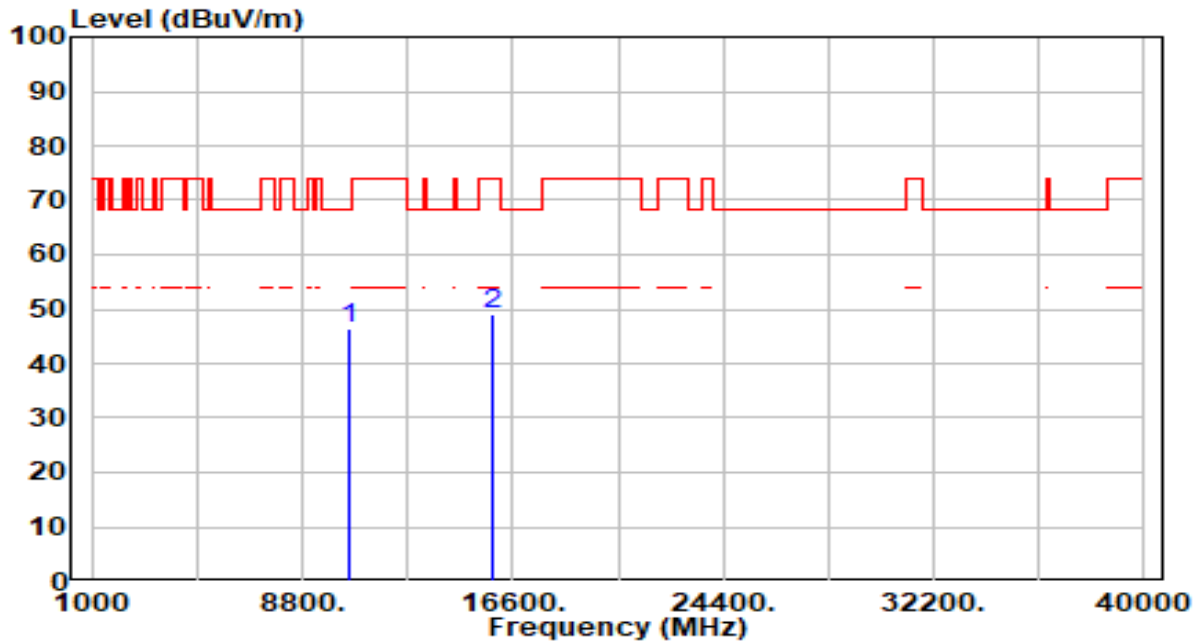


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10580.000	39.84	6.64	46.47	-21.73	68.20	100	314	Peak
2		15870.000	39.88	9.12	49.00	-25.00	74.00	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-14
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-80MHz_484+242_PUN1_TX_Band3_CH 122_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

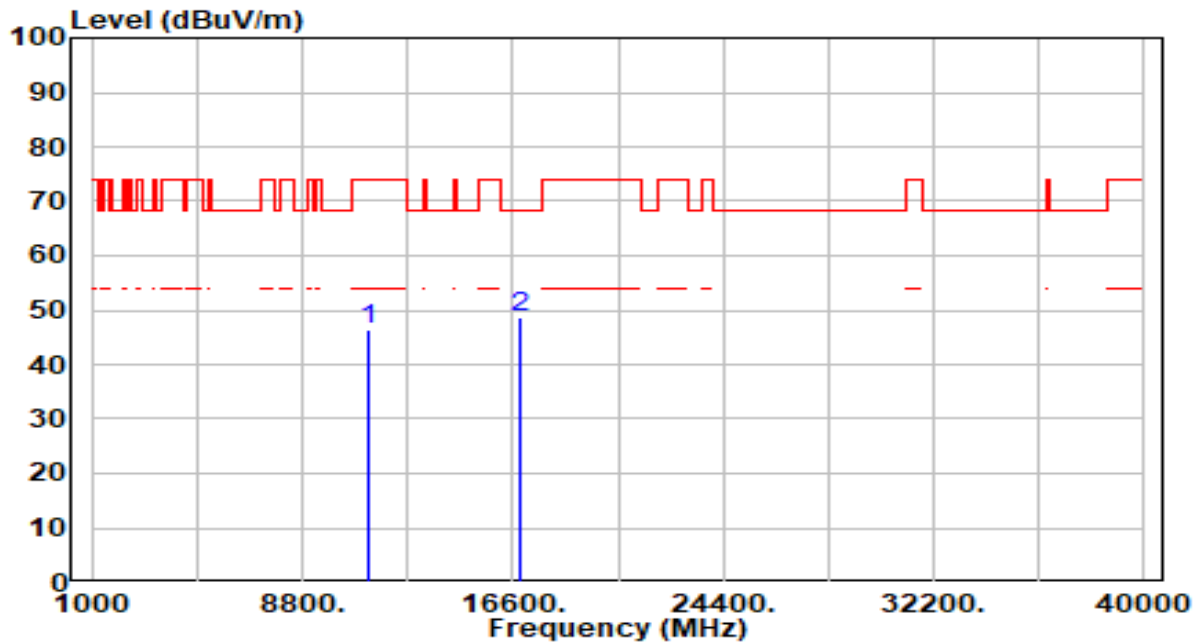


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11220.000	39.38	6.93	46.31	-27.69	74.00	100	360	Peak
2	*	16830.000	40.16	8.70	48.86	-19.34	68.20	100	230	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-14
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-80MHz_484+242_PUN1_TX_Band3_CH 122_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

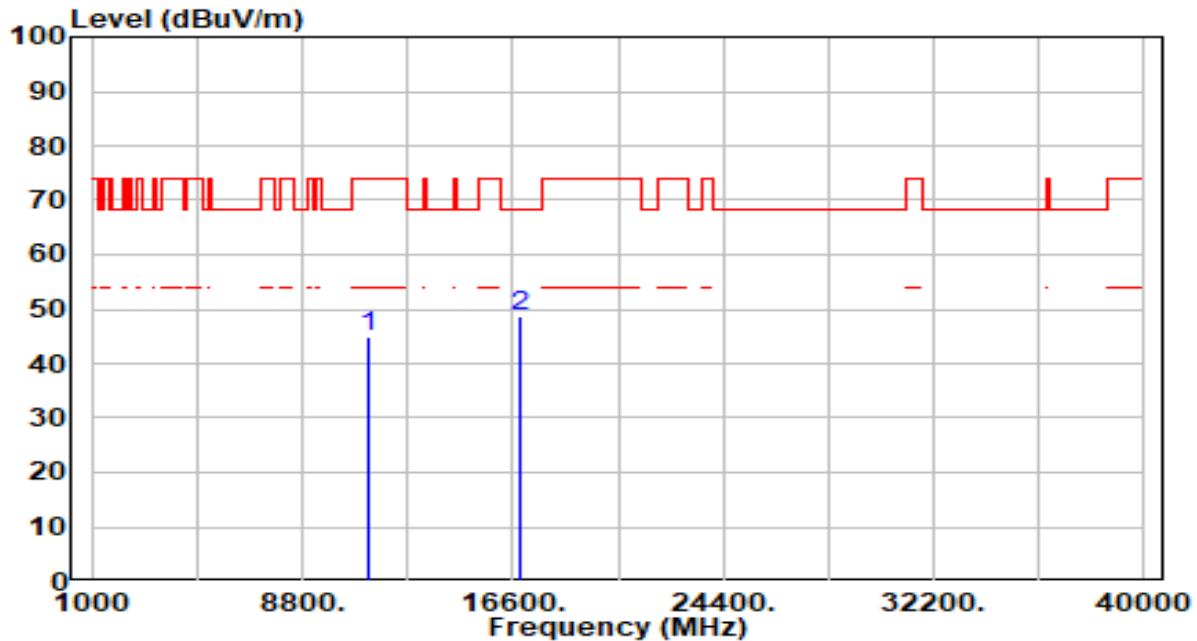


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11220.000	38.12	6.93	45.05	-28.95	74.00	100	230	Peak
2	* 16830.000	39.89	8.70	48.59	-19.61	68.20	100	62	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-14
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-80MHz_484+242_PUN1_TX_Band4_CH 155_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

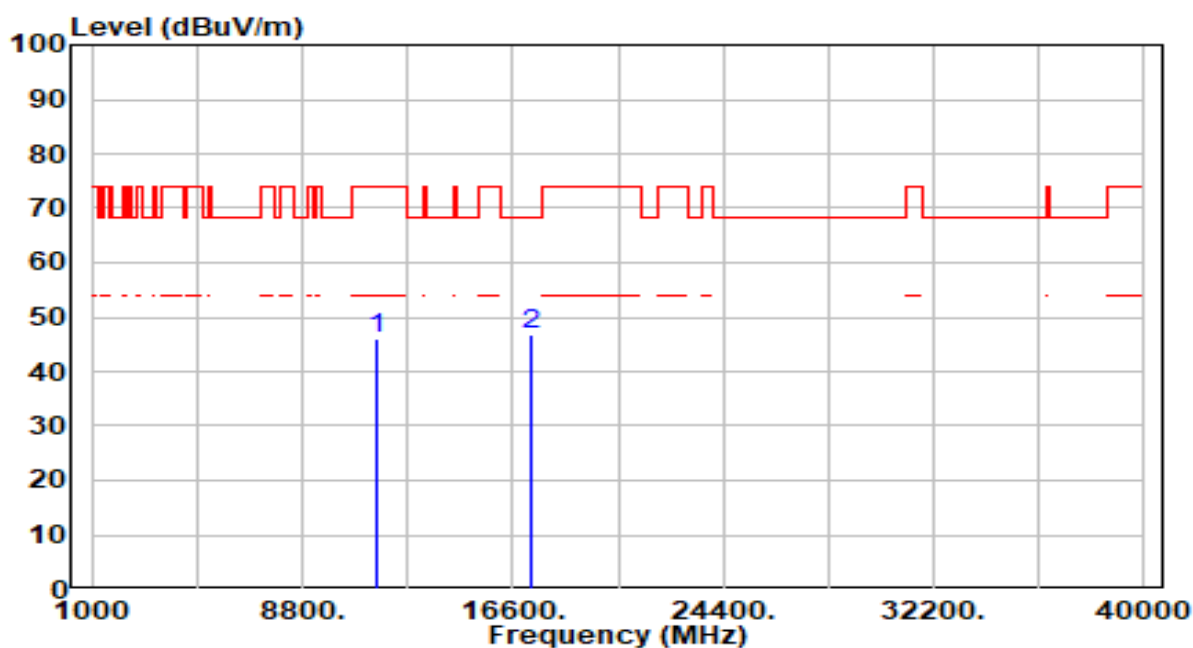


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11550.000	38.79	7.21	46.00	-28.00	74.00	100	349	Peak
2	*	17325.000	39.16	7.50	46.66	-21.54	68.20	100	10	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-14
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-80MHz_484+242_PUN1_TX_Band4_CH 155_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

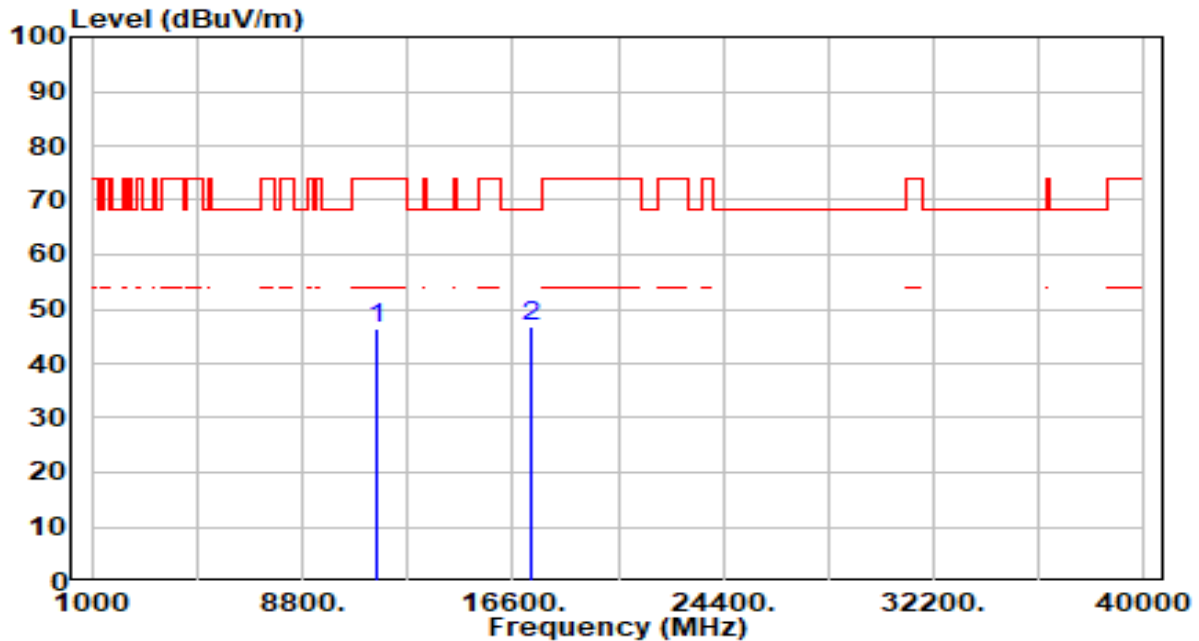


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11550.000	39.25	7.21	46.46	-27.54	74.00	100	337	Peak
2	* 17325.000	39.18	7.50	46.68	-21.52	68.20	100	87	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-14
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_996+484_PUN1_TX_Band1,2_CH 50_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

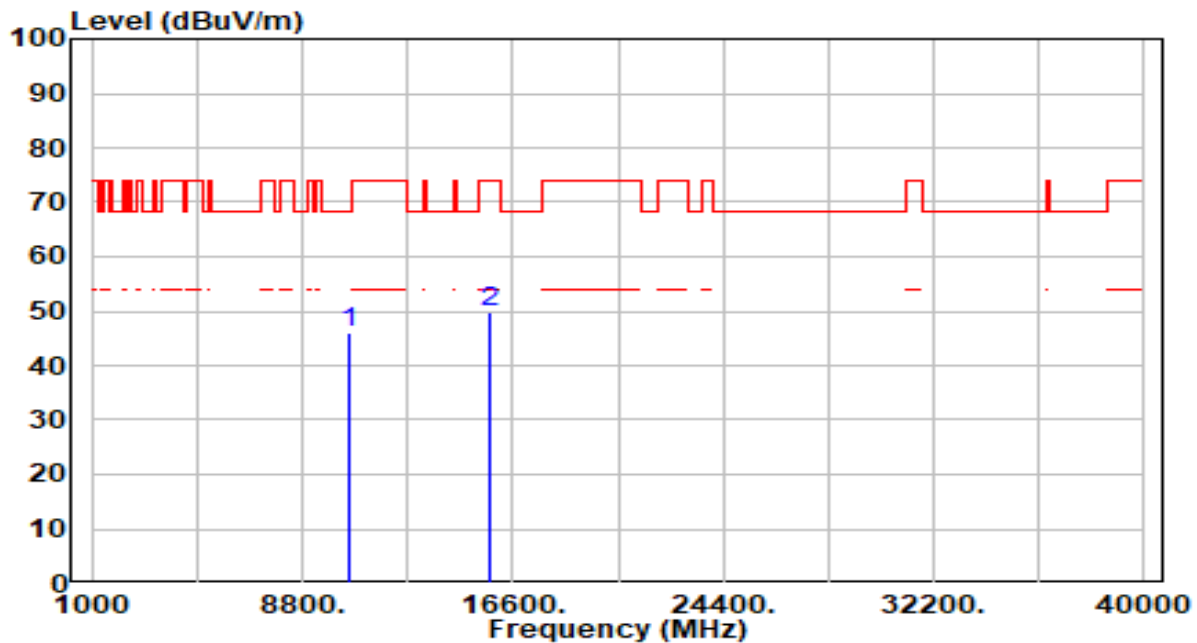


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10500.000	39.50	6.71	46.21	-21.99	68.20	100	273	Peak
2		15750.000	40.79	8.95	49.74	-24.26	74.00	100	188	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-14
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_996+484_PUN1_TX_Band1,2_CH 50_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

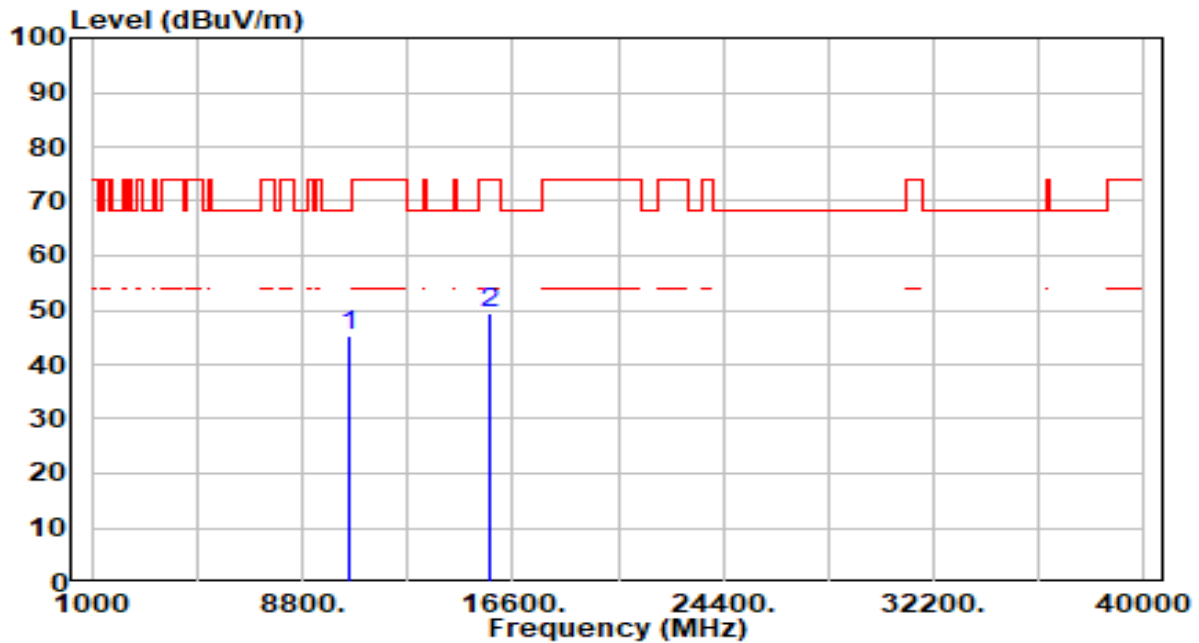


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10500.000	38.68	6.71	45.39	-22.81	68.20	100	44	Peak
2		15750.000	40.52	8.95	49.47	-24.53	74.00	100	61	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-14
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_996+484+242_PUN2_TX_Band1,2_CH 50_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

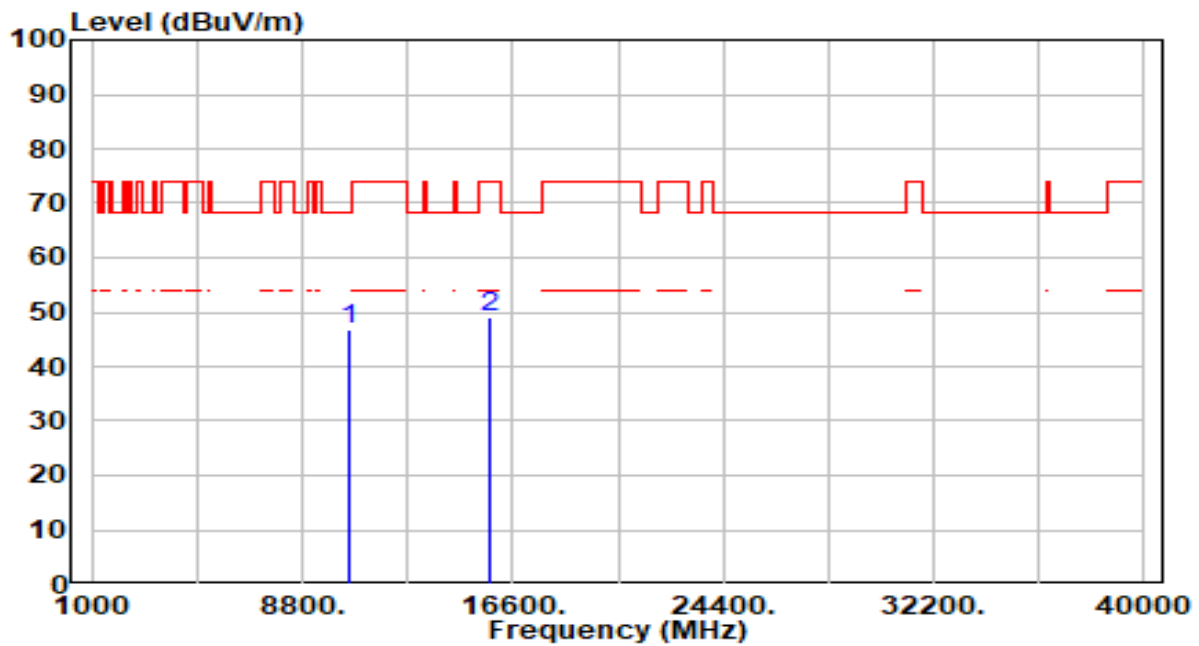


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10500.000	40.19	6.71	46.91	-21.29	68.20	100	193	Peak
2		15750.000	40.17	8.95	49.12	-24.88	74.00	100	252	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-14
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_996+484+242_PUN2_TX_Band1,2_CH 50_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

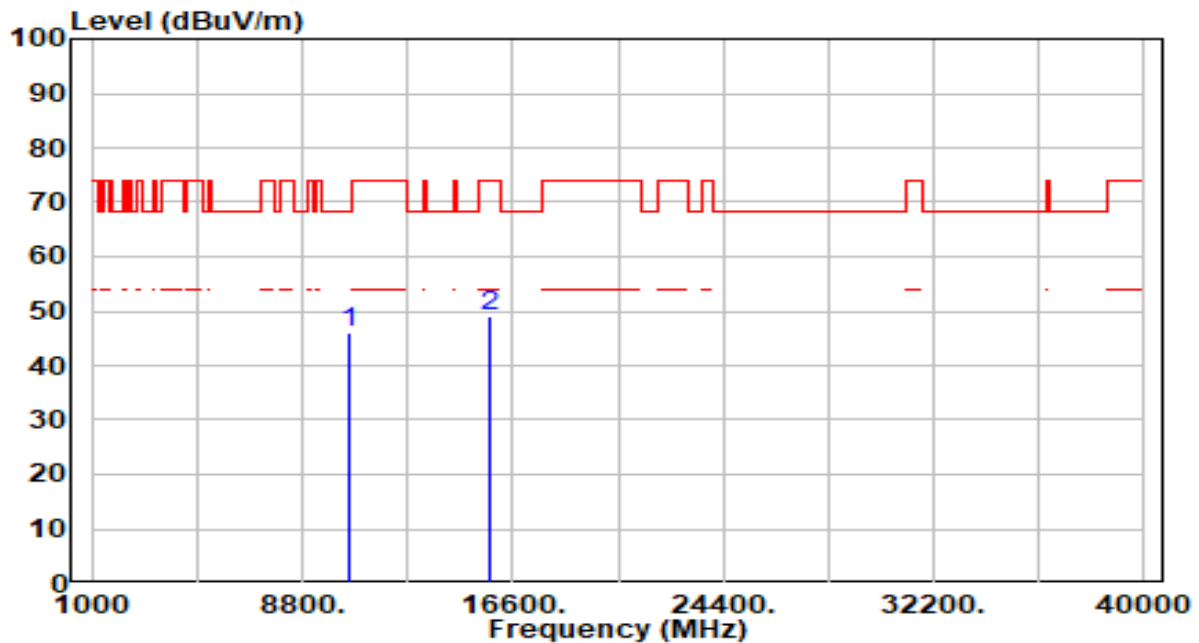


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10500.000	39.44	6.71	46.15	-22.05	68.20	100	348	Peak
2		15750.000	39.93	8.95	48.88	-25.12	74.00	100	338	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-14
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_996+484_PUN1_TX_Band3_CH 114_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

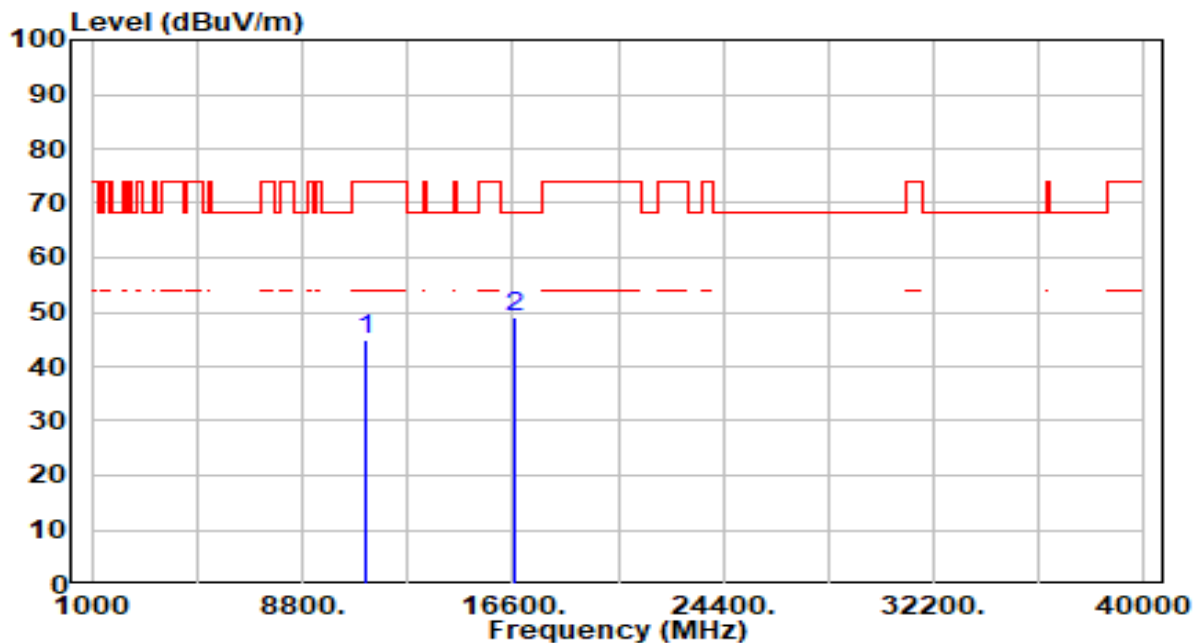


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11140.000	38.35	6.73	45.08	-28.92	74.00	100	314	Peak
2	*	16710.000	40.41	8.70	49.11	-19.09	68.20	100	36	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-14
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_996+484_PUN1_TX_Band3_CH 114_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

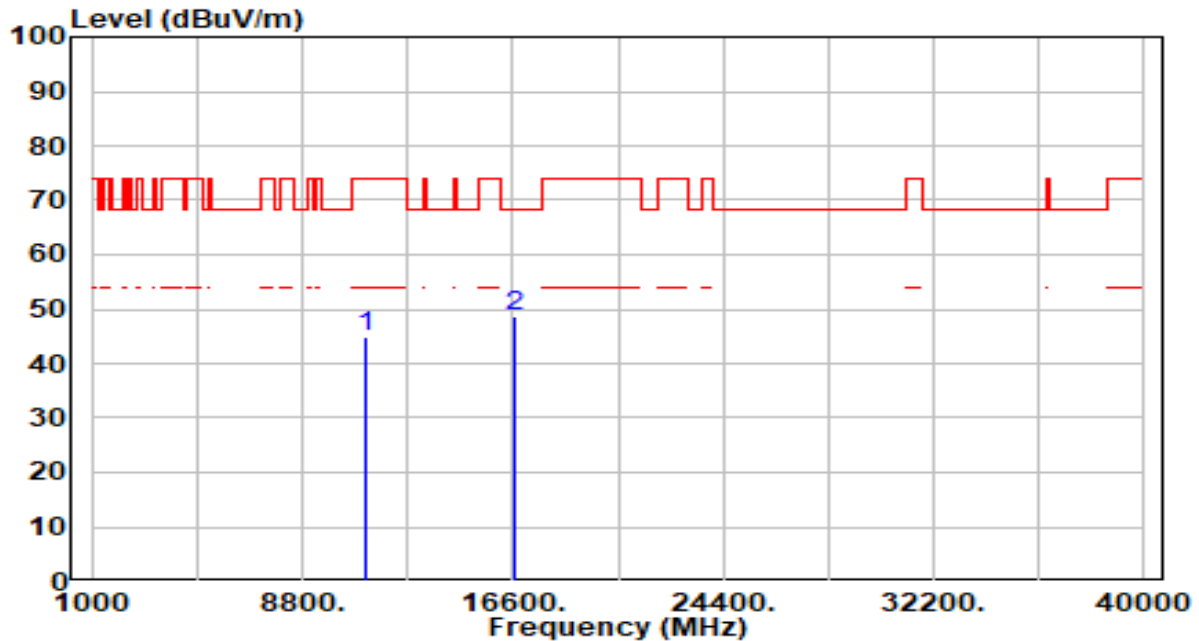


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11140.000	38.27	6.73	45.01	-28.99	74.00	100	29	Peak
2	* 16710.000	40.05	8.70	48.75	-19.45	68.20	100	198	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-14
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_996+484+242_PUN2_TX_Band3_CH114_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

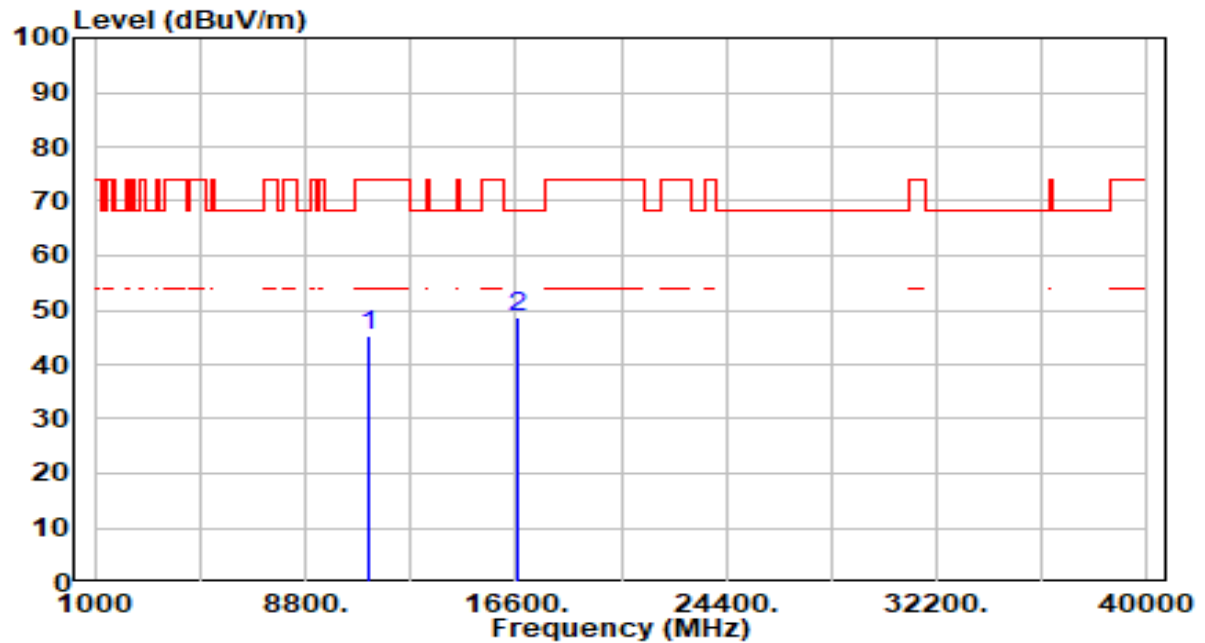


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11140.000	38.46	6.73	45.19	-28.81	74.00	100	353	Peak
2		16710.000	39.96	8.70	48.66	-19.54	68.20	100	332	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-14
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_996+484+242_PUN2_TX_Band3_CH114_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

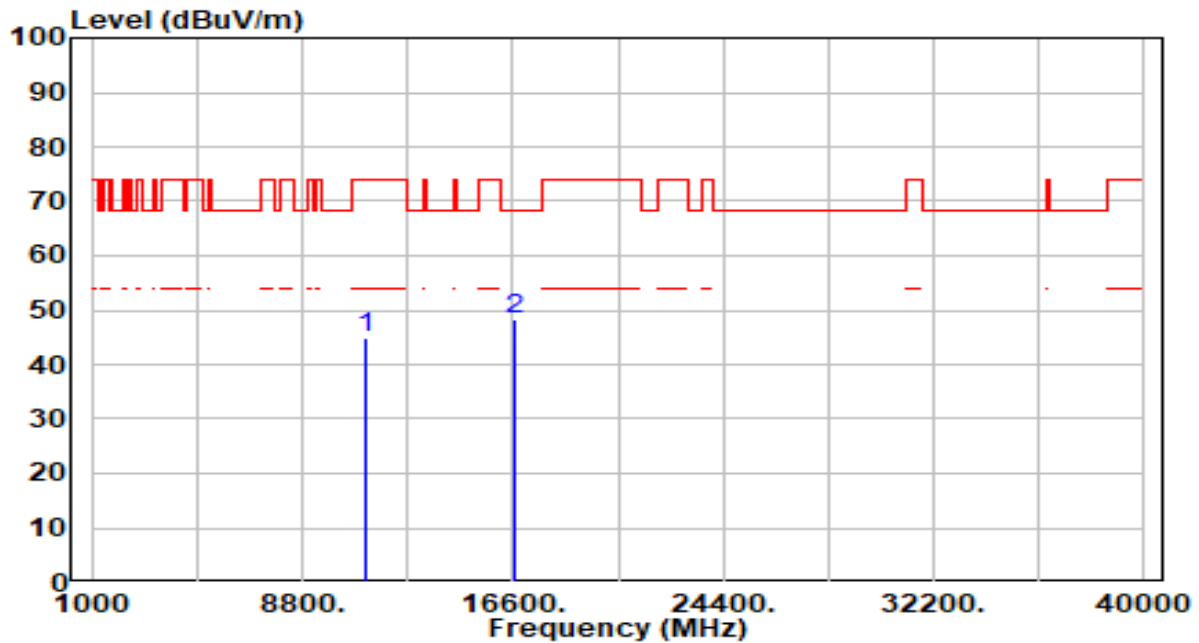


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11140.000	38.30	6.73	45.03	-28.97	74.00	100	39	Peak
2	*	16710.000	39.50	8.70	48.21	-19.99	68.20	100	213	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

HBS

EUT	Mobile Computer	Date of Test	2025-07-17
Factor	VULB 9162	Temp. / Humidity	23°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Tim
Test Mode	802.11ac-20MHz_TX_Band1_CH 40_ANT 0+1	Test Voltage	By Notebook PC

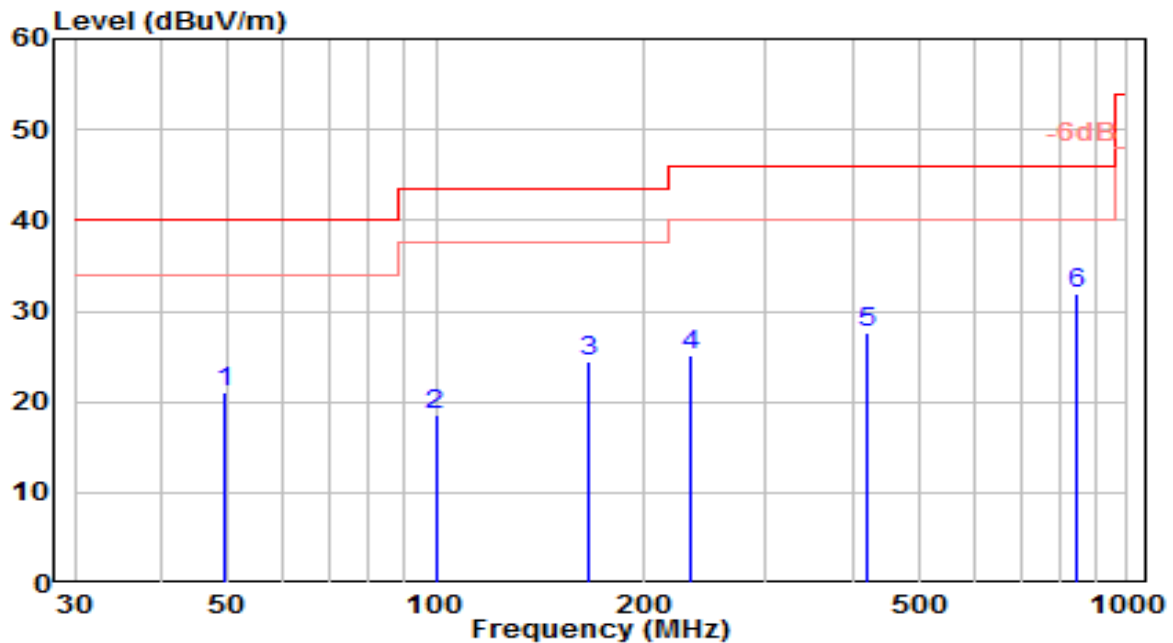


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	49.400	-0.08	21.21	21.13	-18.87	40.00	100	80	QP
2	99.840	-0.27	18.86	18.59	-24.91	43.50	145	0	QP
3	165.800	8.28	16.22	24.50	-19.00	43.50	150	255	QP
4	232.730	5.43	19.65	25.09	-20.91	46.00	100	240	QP
5	418.970	3.66	24.00	27.65	-18.35	46.00	150	270	QP
6	* 845.770	0.81	31.17	31.98	-14.02	46.00	150	55	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-17
Factor	VULB 9162	Temp. / Humidity	23°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Tim
Test Mode	802.11ac-20MHz_TX_Band1_CH 40_ANT 0+1	Test Voltage	By Notebook PC

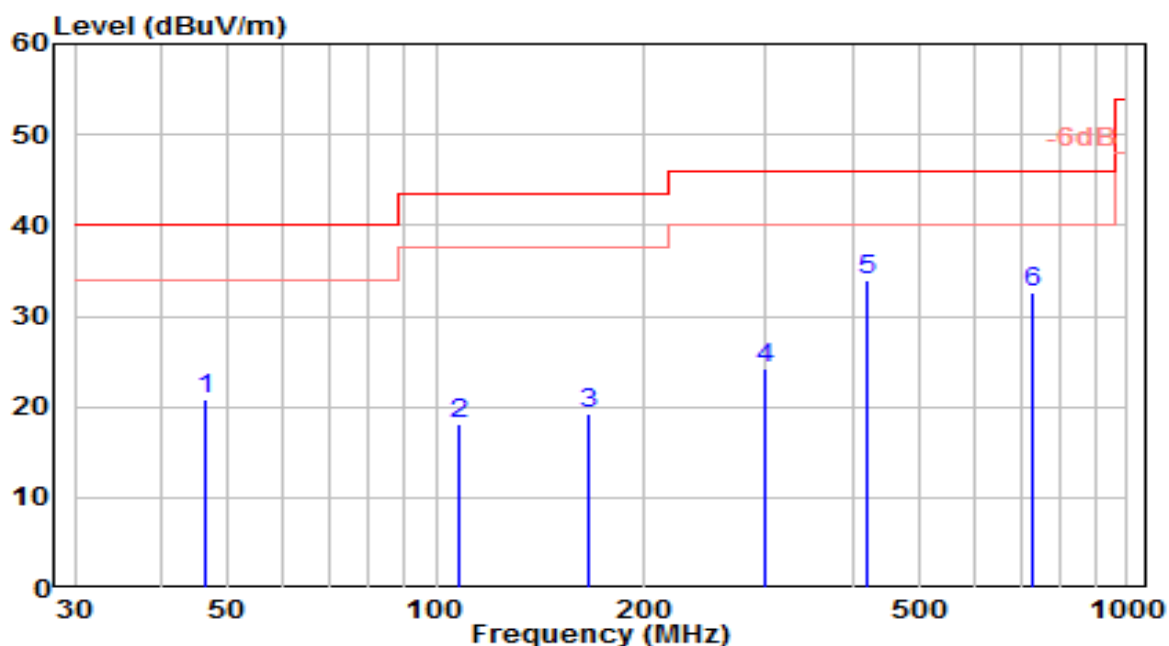


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	46.490	-0.21	21.08	20.87	-19.13	40.00	150	215	QP
2	107.600	-0.67	18.77	18.10	-25.40	43.50	150	350	QP
3	165.800	2.91	16.22	19.14	-24.36	43.50	100	320	QP
4	298.690	3.00	21.13	24.13	-21.87	46.00	100	210	QP
5	* 418.970	9.95	24.00	33.95	-12.05	46.00	100	205	QP
6	731.310	3.24	29.26	32.50	-13.50	46.00	150	215	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1	Test Voltage	By Notebook PC

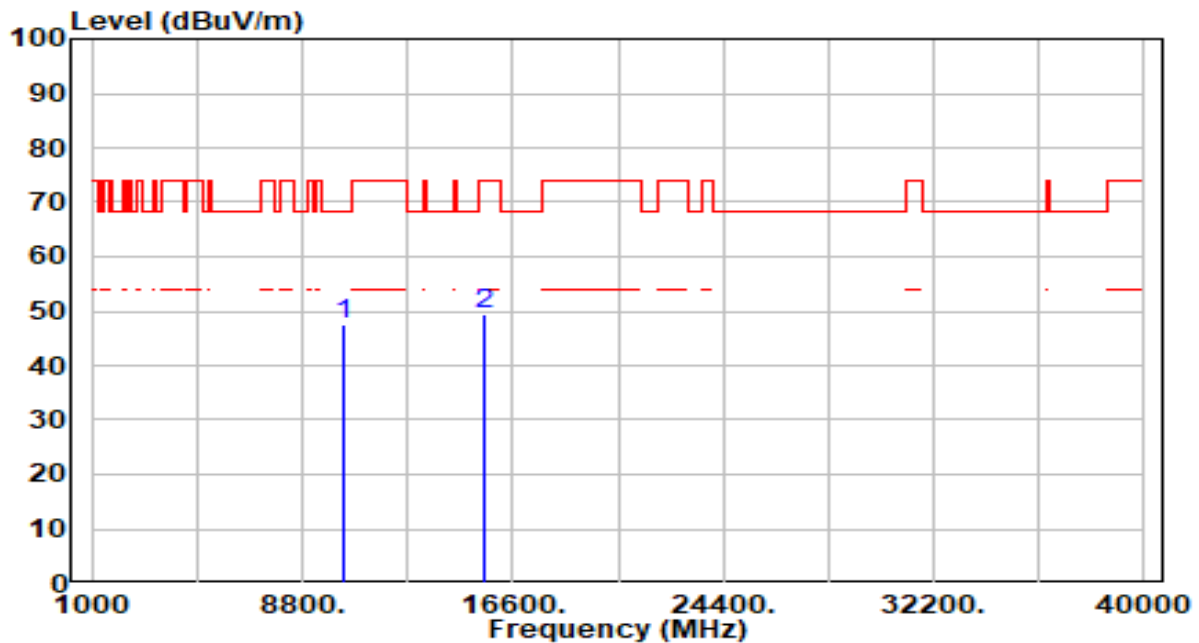


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10360.000	40.60	6.84	47.45	-20.75	68.20	100	150	Peak
2		15540.000	40.67	8.70	49.37	-24.63	74.00	100	164	Peak

Note:

1. " * ", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1	Test Voltage	By Notebook PC

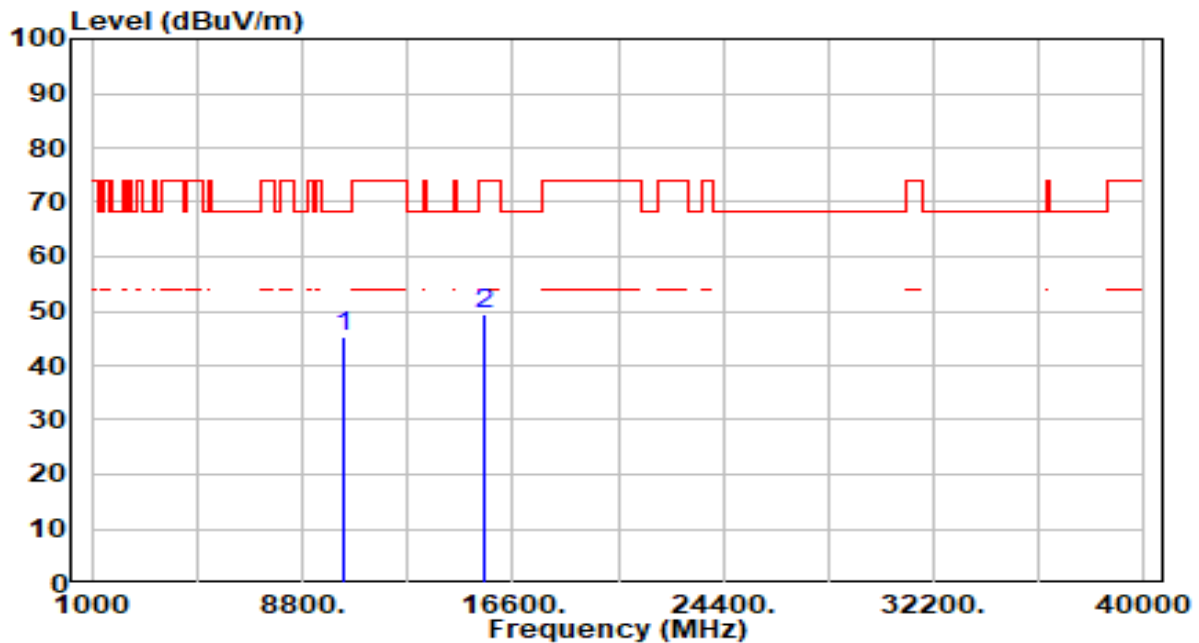


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10360.000	38.63	6.84	45.47	-22.73	68.20	100	81	Peak
2		15540.000	40.65	8.70	49.35	-24.65	74.00	300	256	Peak

Note:

1. " * ", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band1_CH 40_ANT 0+1	Test Voltage	By Notebook PC

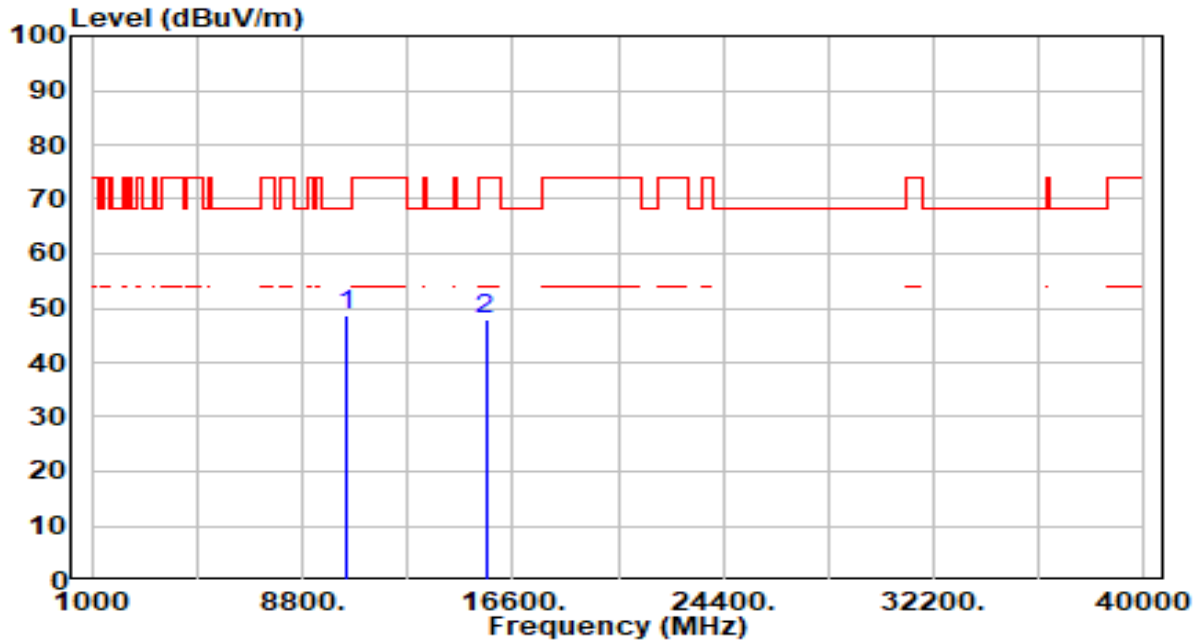


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10400.000	41.99	6.82	48.81	-19.39	68.20	100	192	Peak
2		15600.000	39.39	8.62	48.00	-26.00	74.00	100	30	Peak

Note:

1. " * ", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band1_CH 40_ANT 0+1	Test Voltage	By Notebook PC

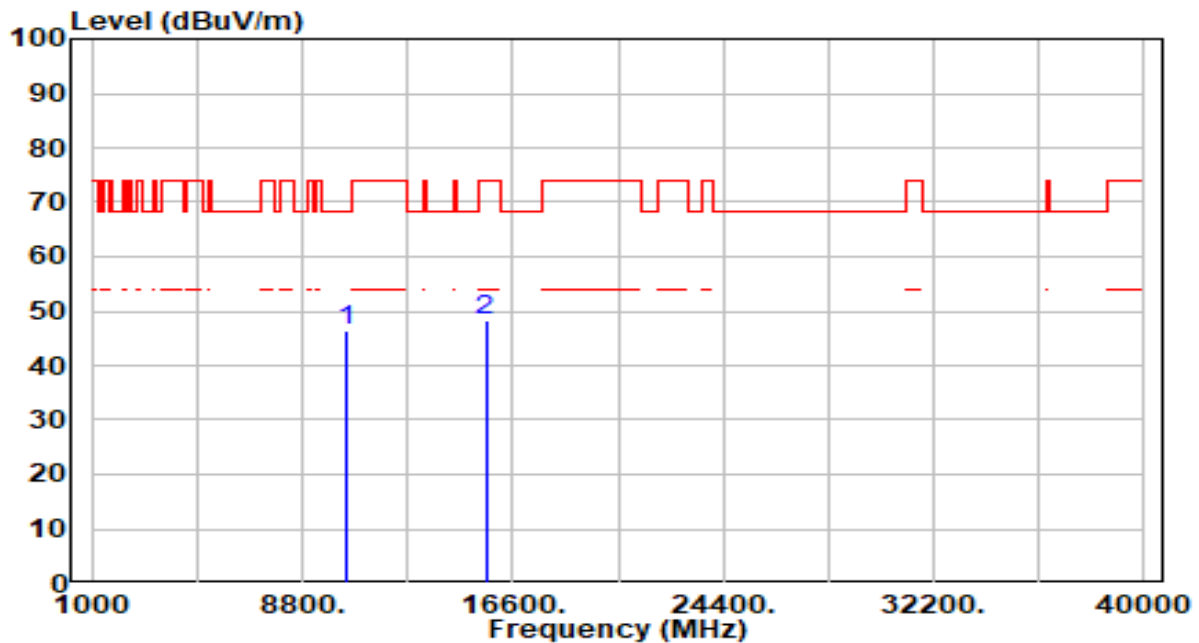


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10400.000	39.48	6.82	46.29	-21.91	68.20	100	32	Peak
2		15600.000	39.52	8.62	48.13	-25.87	74.00	100	351	Peak

Note:

1. " * ", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band1_CH 48_ANT 0+1	Test Voltage	By Notebook PC

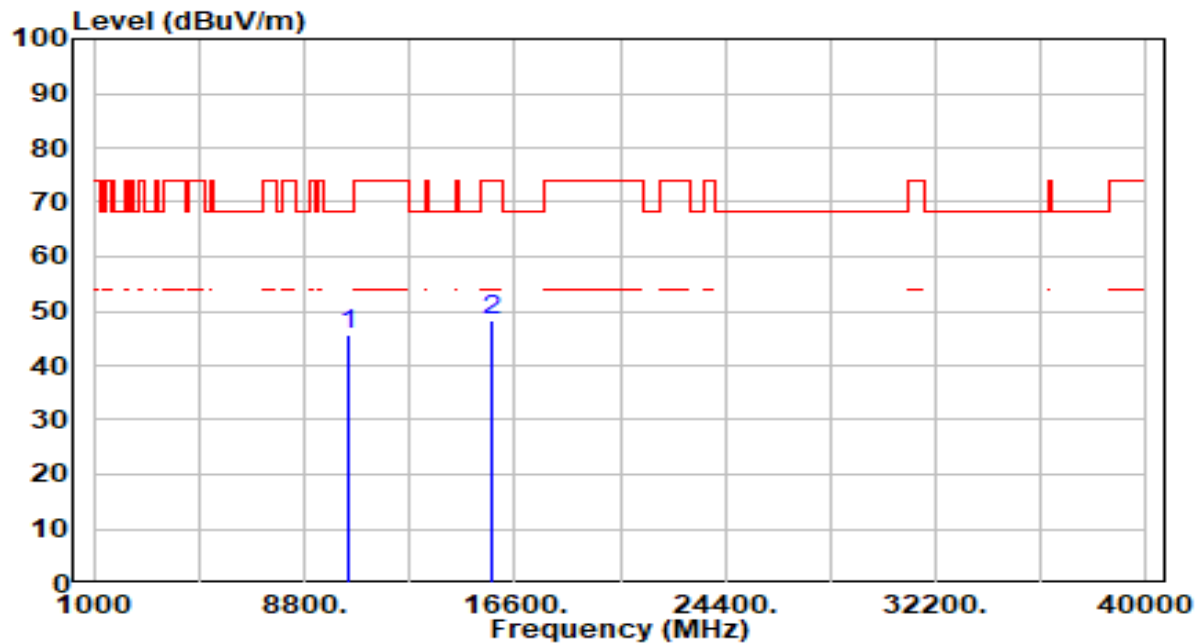


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10480.000	39.07	6.74	45.80	-22.40	68.20	100	188	Peak
2		15720.000	39.38	8.90	48.28	-25.72	74.00	100	258	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band1_CH 48_ANT 0+1	Test Voltage	By Notebook PC

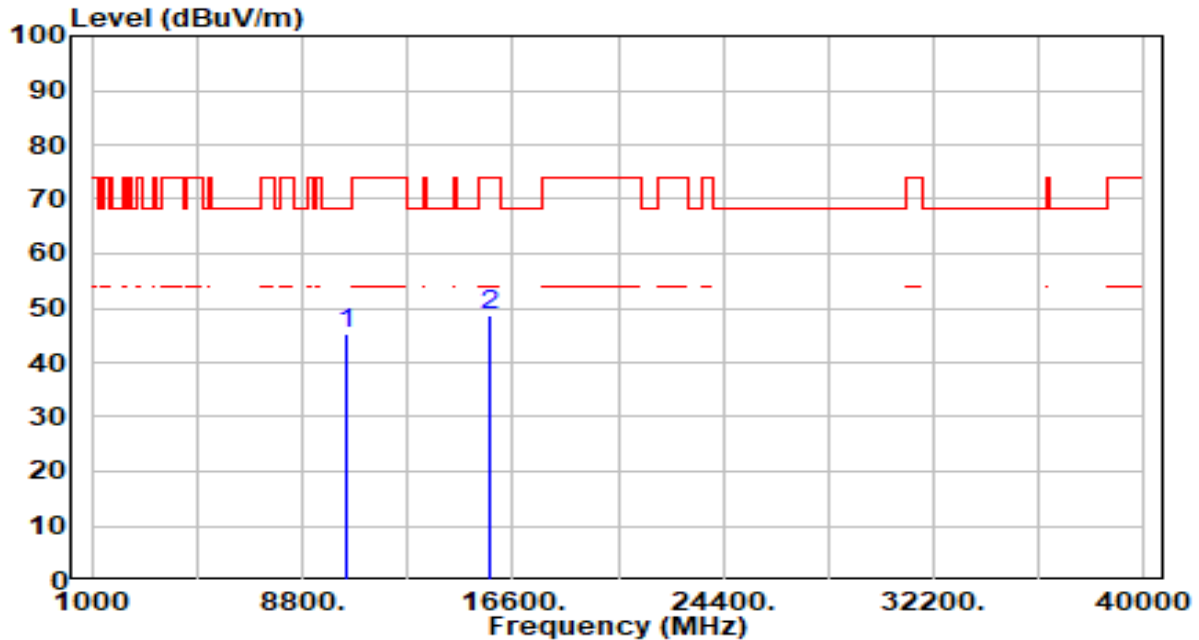


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10480.000	38.45	6.74	45.19	-23.01	68.20	100	150	Peak
2		15720.000	39.60	8.90	48.50	-25.50	74.00	100	104	Peak

Note:

1. " * ", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band2_CH 52_ANT 0+1	Test Voltage	By Notebook PC

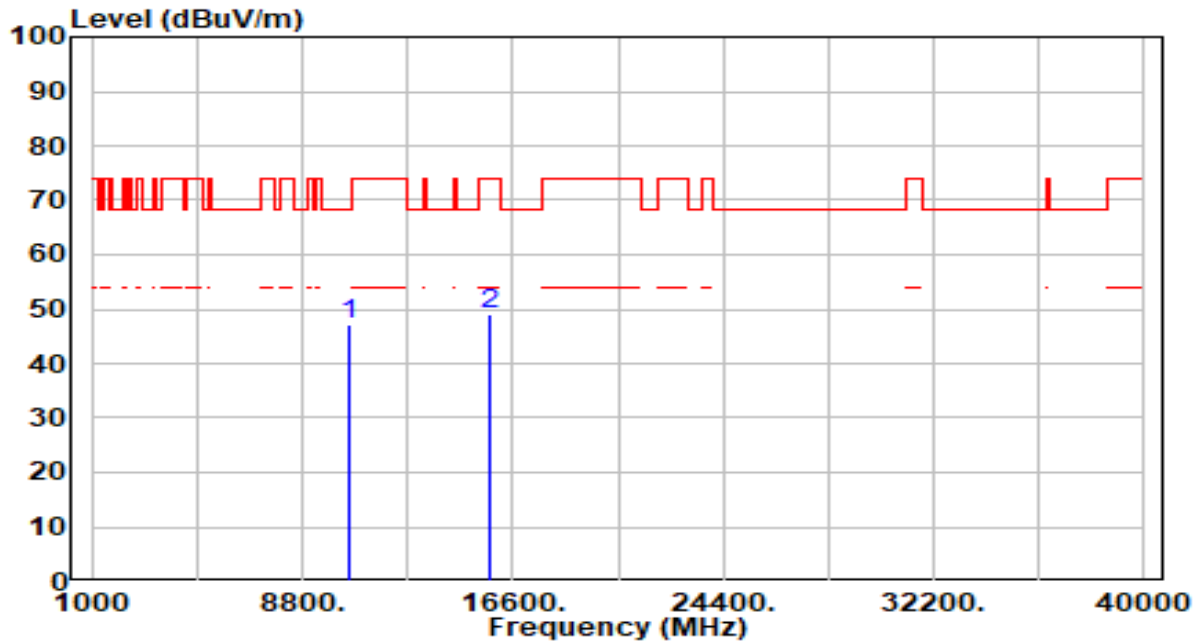


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10520.000	40.57	6.70	47.27	-20.93	68.20	100	321	Peak
2		15780.000	39.88	9.00	48.88	-25.12	74.00	100	20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band2_CH 52_ANT 0+1	Test Voltage	By Notebook PC

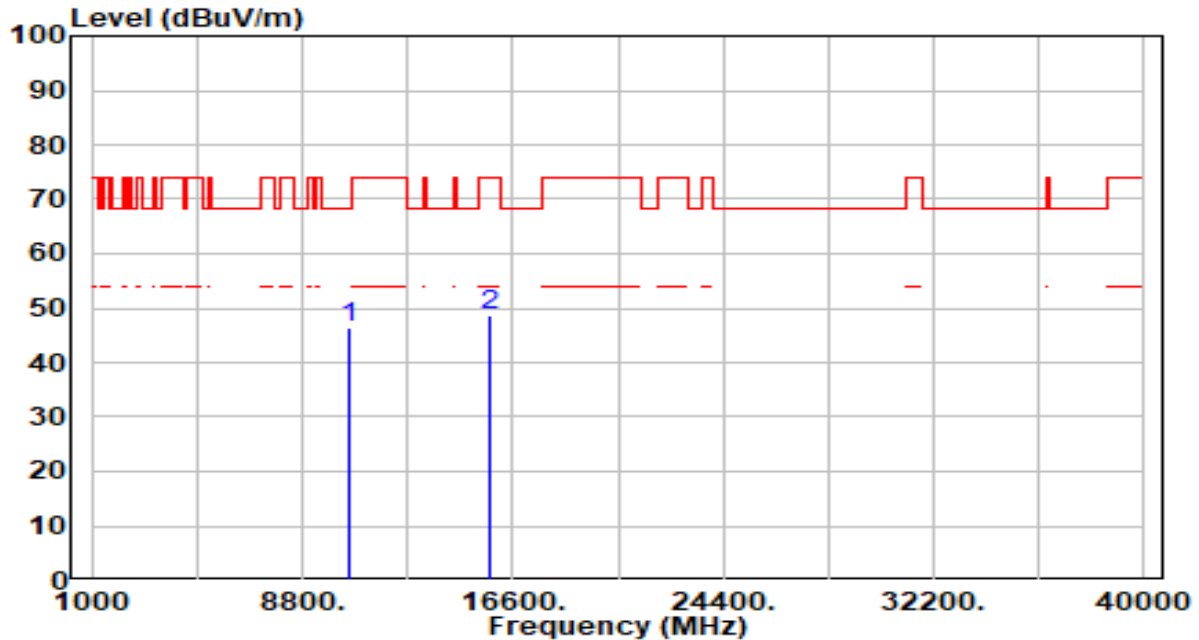


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10520.000	39.53	6.70	46.23	-21.97	68.20	100	74	Peak
2		15780.000	39.79	9.00	48.80	-25.20	74.00	100	126	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band2_CH 60_ANT 0+1	Test Voltage	By Notebook PC

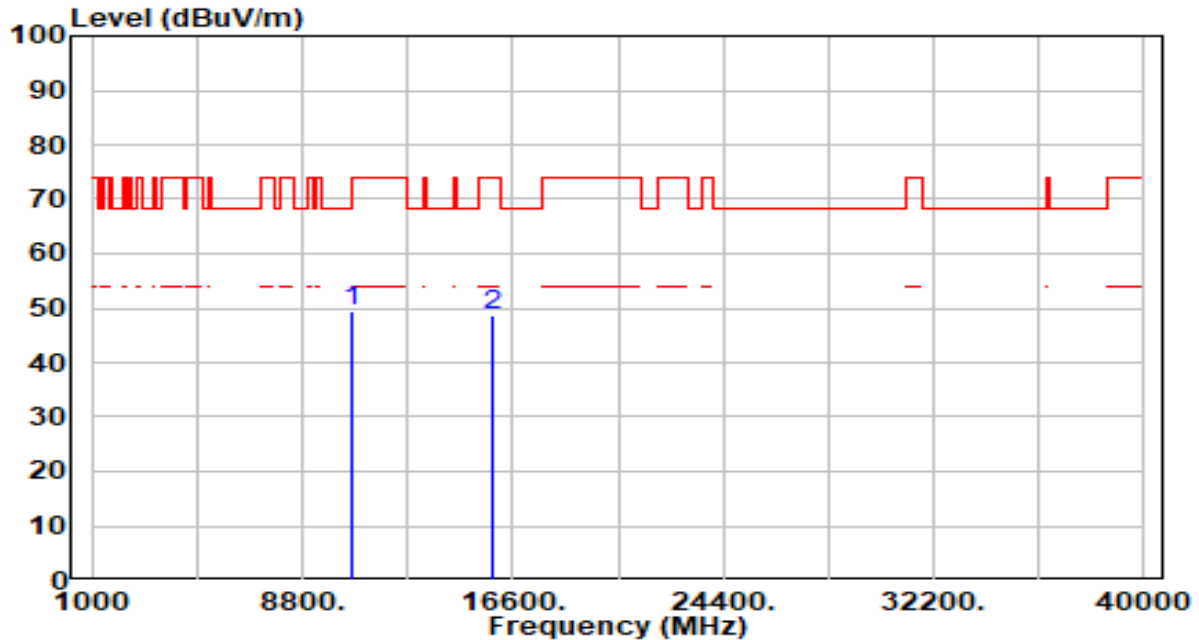


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10600.000	42.98	6.62	49.60	-18.60	68.20	100	206	Peak
2		15900.000	39.49	9.16	48.65	-25.35	74.00	100	170	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band2_CH 60_ANT 0+1	Test Voltage	By Notebook PC

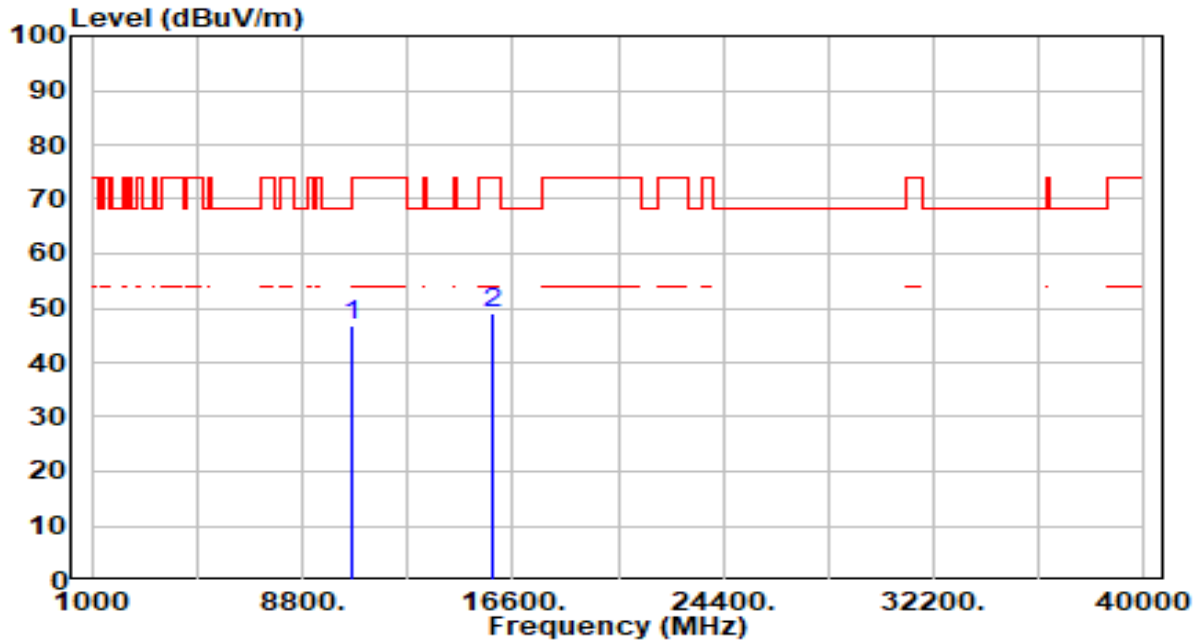


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10600.000	40.00	6.62	46.62	-21.58	68.20	100	108	Peak
2		15900.000	39.76	9.16	48.92	-25.08	74.00	100	312	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1	Test Voltage	By Notebook PC

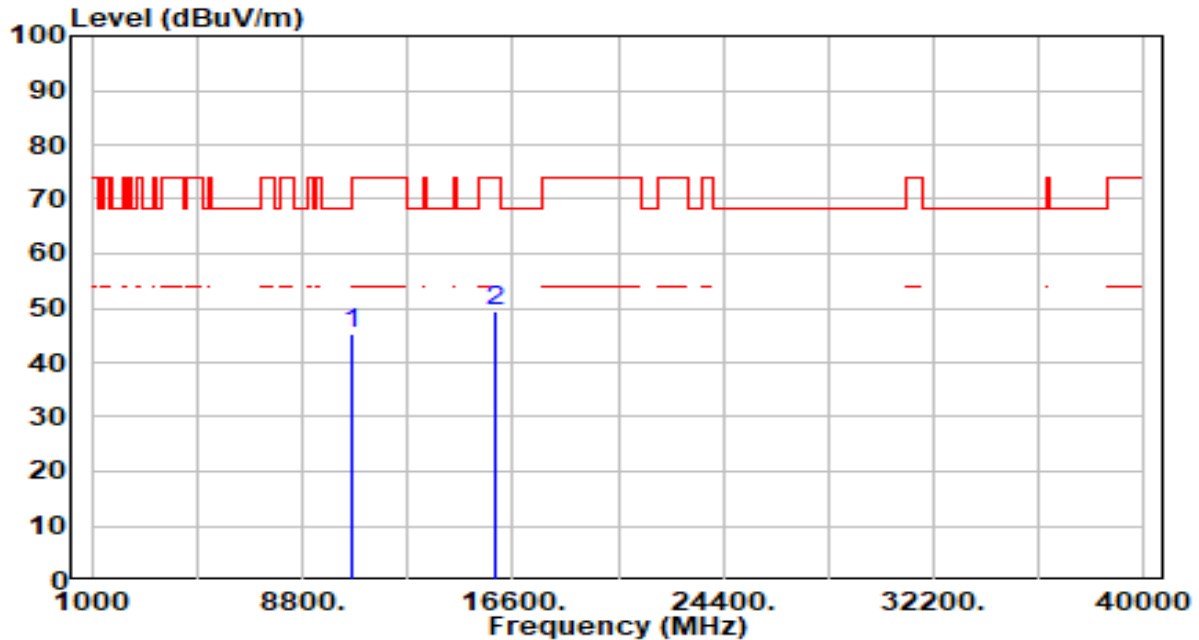


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		10640.000	38.68	6.63	45.31	-28.69	74.00	100	9	Peak
2	*	15960.000	40.31	9.13	49.43	-24.57	74.00	100	33	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1	Test Voltage	By Notebook PC

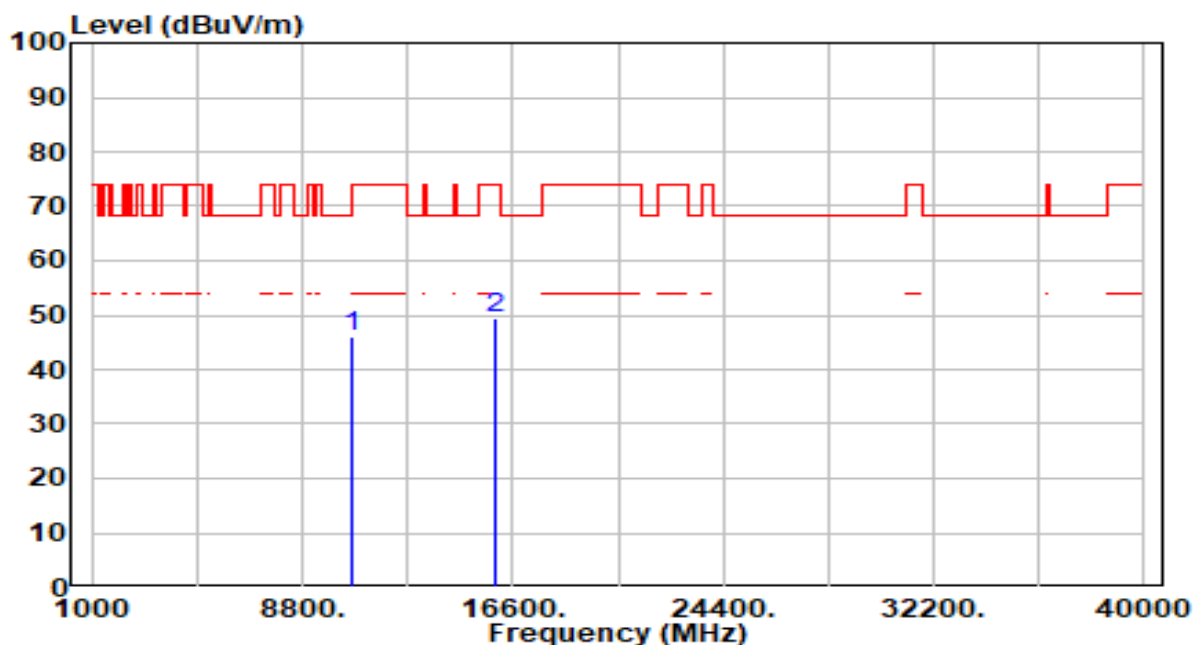


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10640.000	39.25	6.63	45.88	-28.12	74.00	100	231	Peak
2	* 15960.000	40.15	9.13	49.28	-24.72	74.00	100	27	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	By Notebook PC

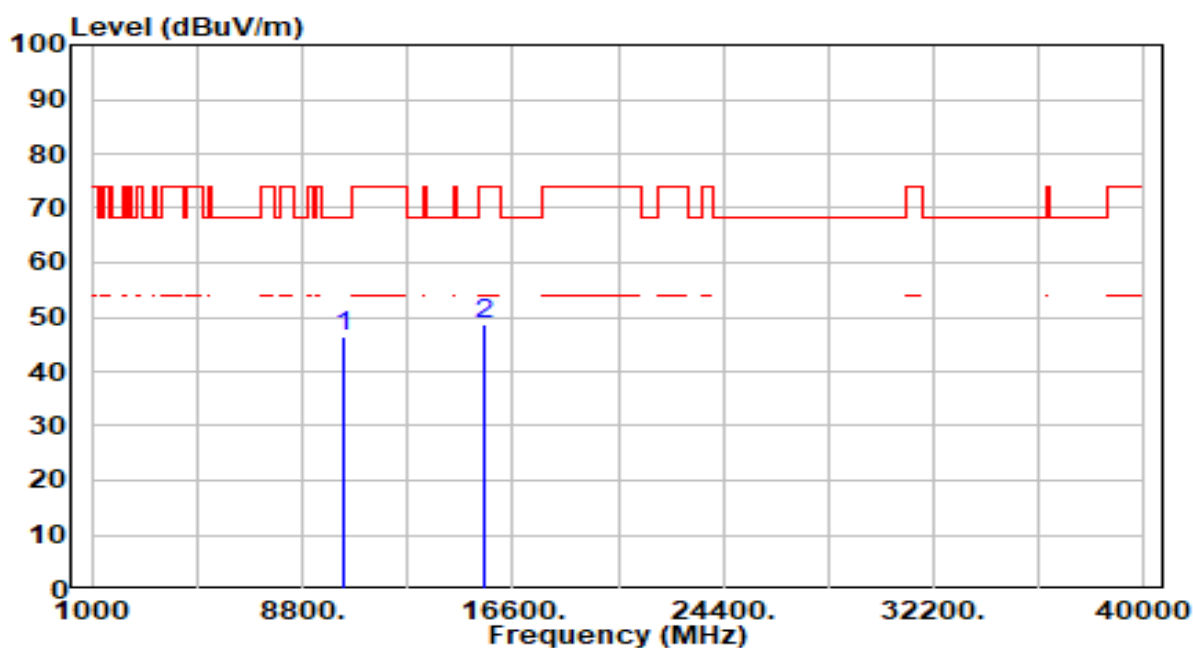


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10360.000	39.68	6.84	46.53	-21.67	68.20	100	132	Peak
2		15540.000	39.87	8.70	48.57	-25.43	74.00	100	59	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	By Notebook PC

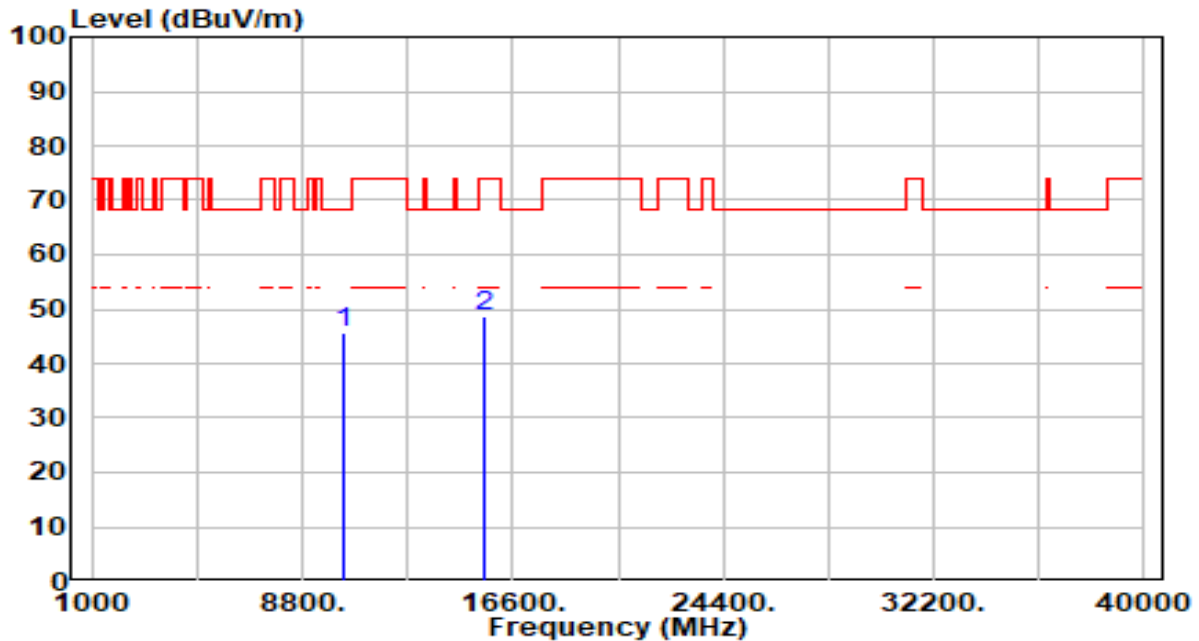


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10360.000	38.82	6.84	45.66	-22.54	68.20	100	52	Peak
2		15540.000	39.90	8.70	48.60	-25.40	74.00	100	256	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band1_CH 40_ANT 0+1	Test Voltage	By Notebook PC

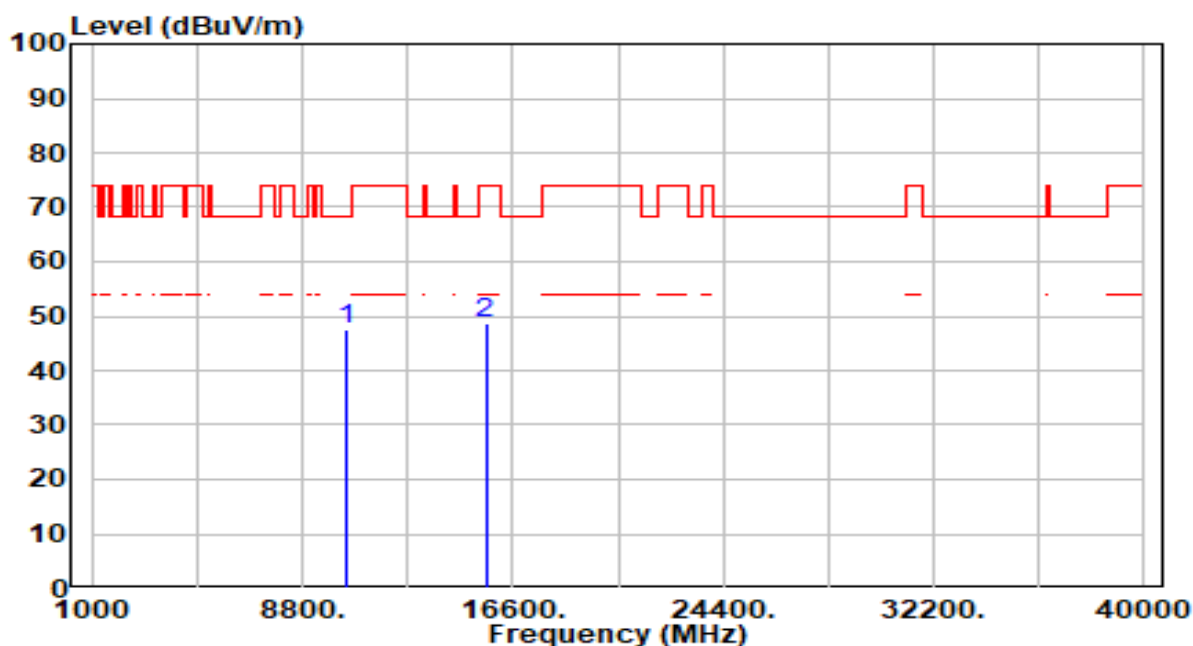


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10400.000	40.88	6.82	47.69	-20.51	68.20	100	199	Peak
2		15600.000	40.19	8.62	48.81	-25.19	74.00	100	182	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band1_CH 40_ANT 0+1	Test Voltage	By Notebook PC

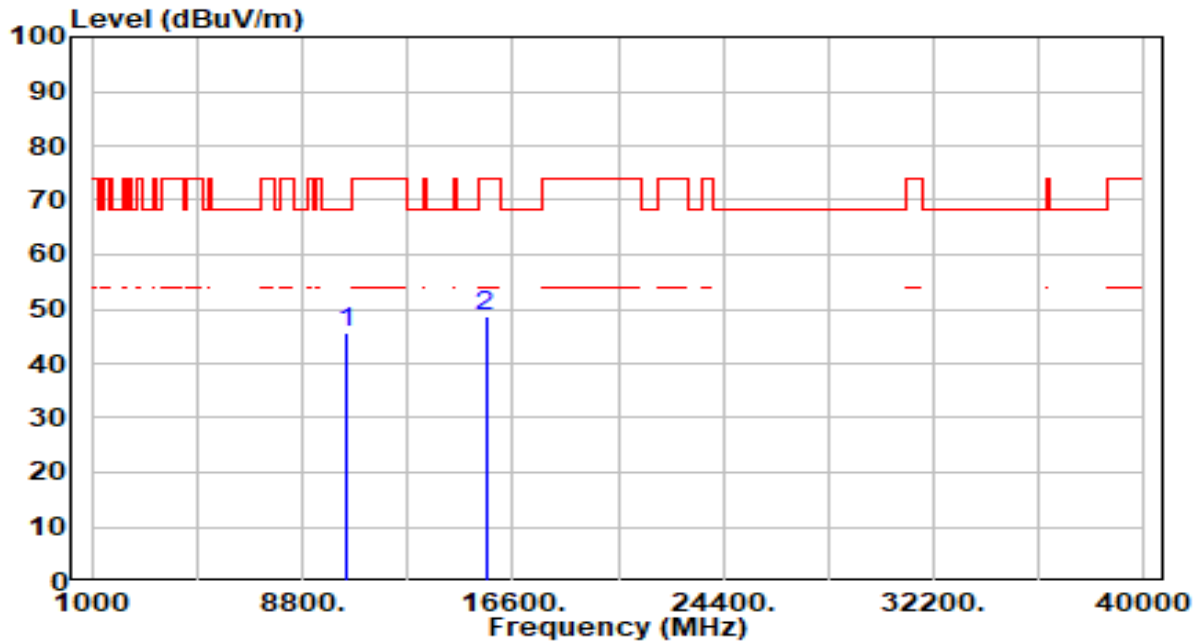


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10400.000	38.96	6.82	45.78	-22.42	68.20	100	322	Peak
2		15600.000	39.98	8.62	48.60	-25.40	74.00	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band1_CH 48_ANT 0+1	Test Voltage	By Notebook PC

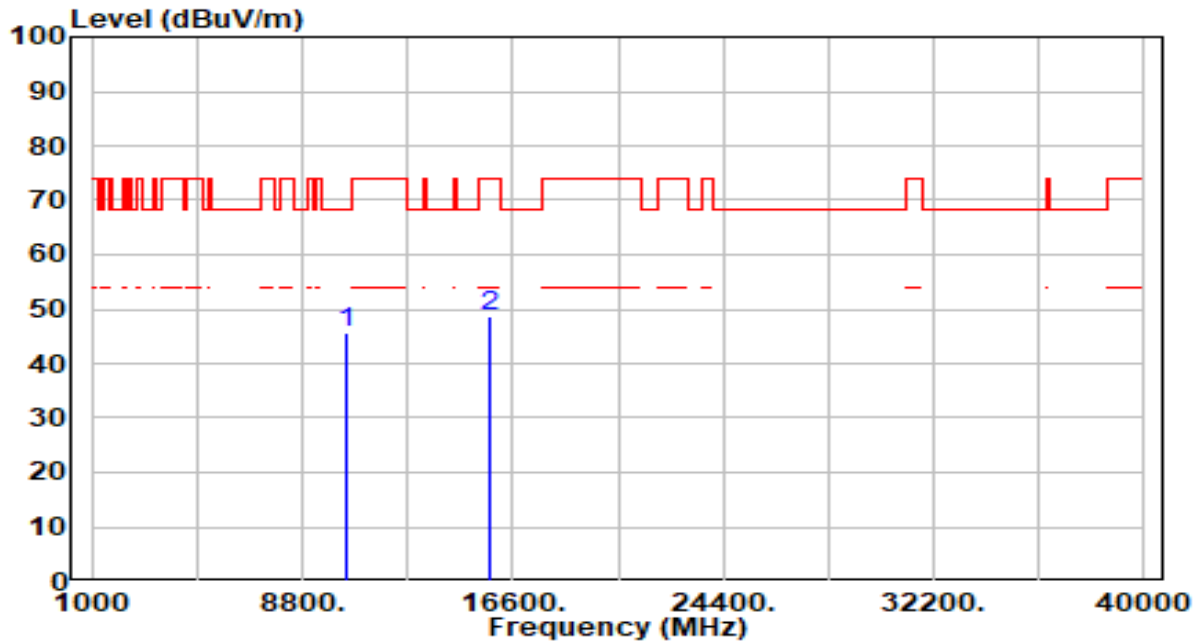


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10480.000	39.09	6.74	45.82	-22.38	68.20	100	360	Peak
2		15720.000	39.82	8.90	48.72	-25.28	74.00	100	188	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band1_CH 48_ANT 0+1	Test Voltage	By Notebook PC

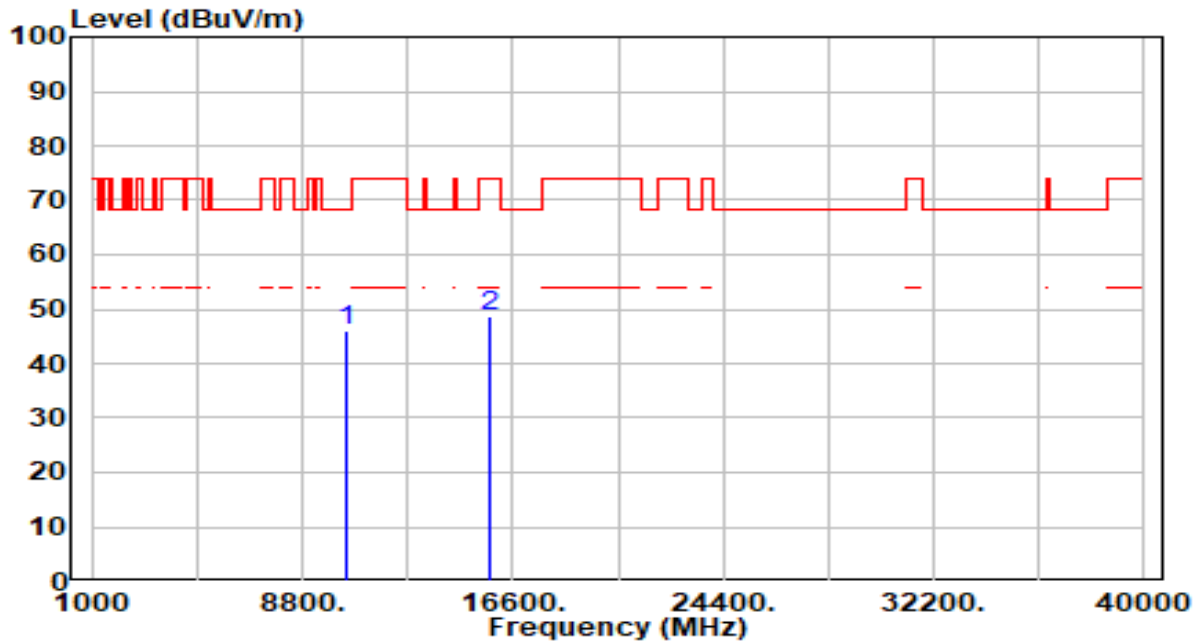


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10480.000	39.19	6.74	45.92	-22.28	68.20	100	252	Peak
2		15720.000	39.77	8.90	48.67	-25.33	74.00	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band2_CH 52_ANT 0+1	Test Voltage	By Notebook PC

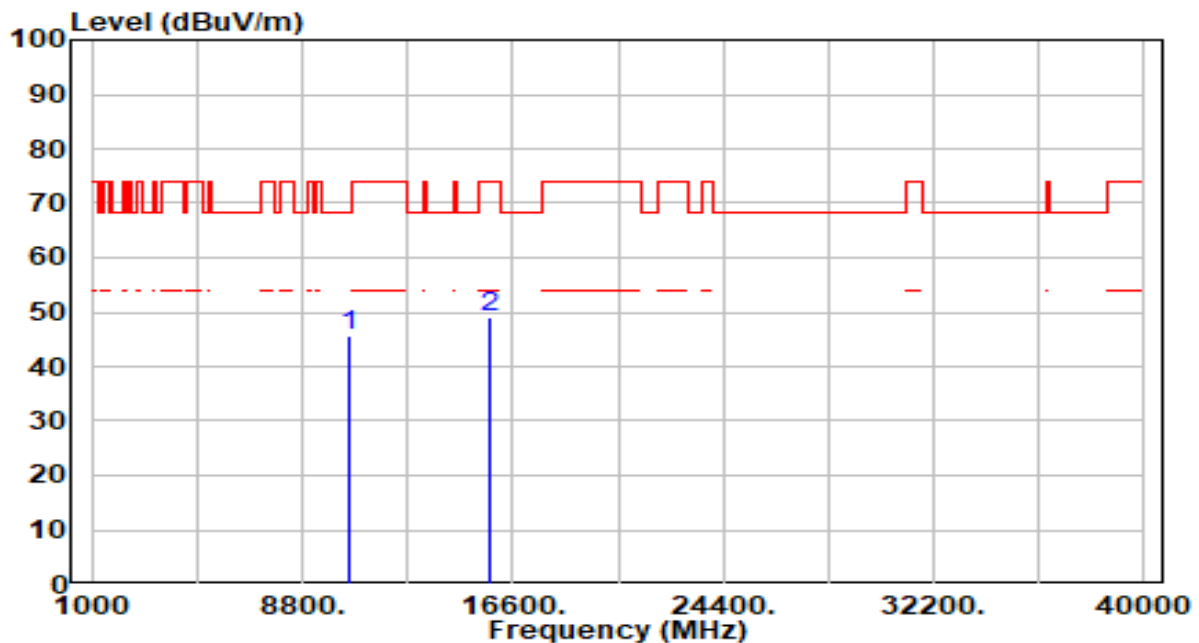


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10520.000	39.02	6.70	45.71	-22.49	68.20	100	83	Peak
2		15780.000	39.87	9.00	48.87	-25.13	74.00	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band2_CH 52_ANT 0+1	Test Voltage	By Notebook PC

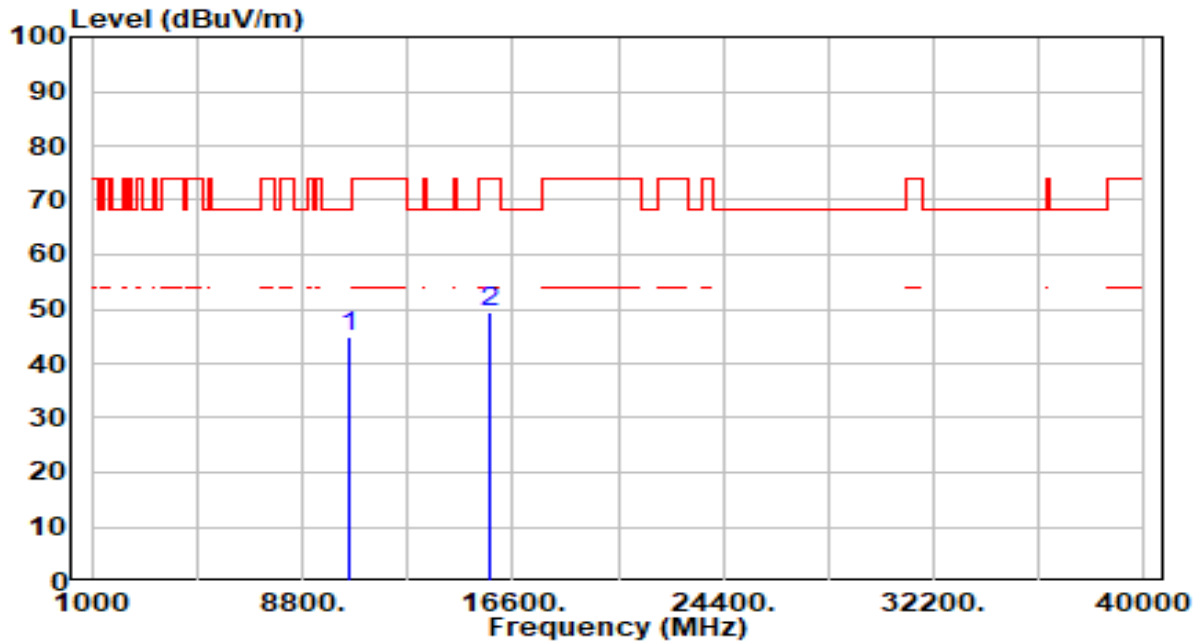


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10520.000	38.26	6.70	44.96	-23.24	68.20	100	344	Peak
2		15780.000	40.34	9.00	49.34	-24.66	74.00	100	7	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band2_CH 60_ANT 0+1	Test Voltage	By Notebook PC

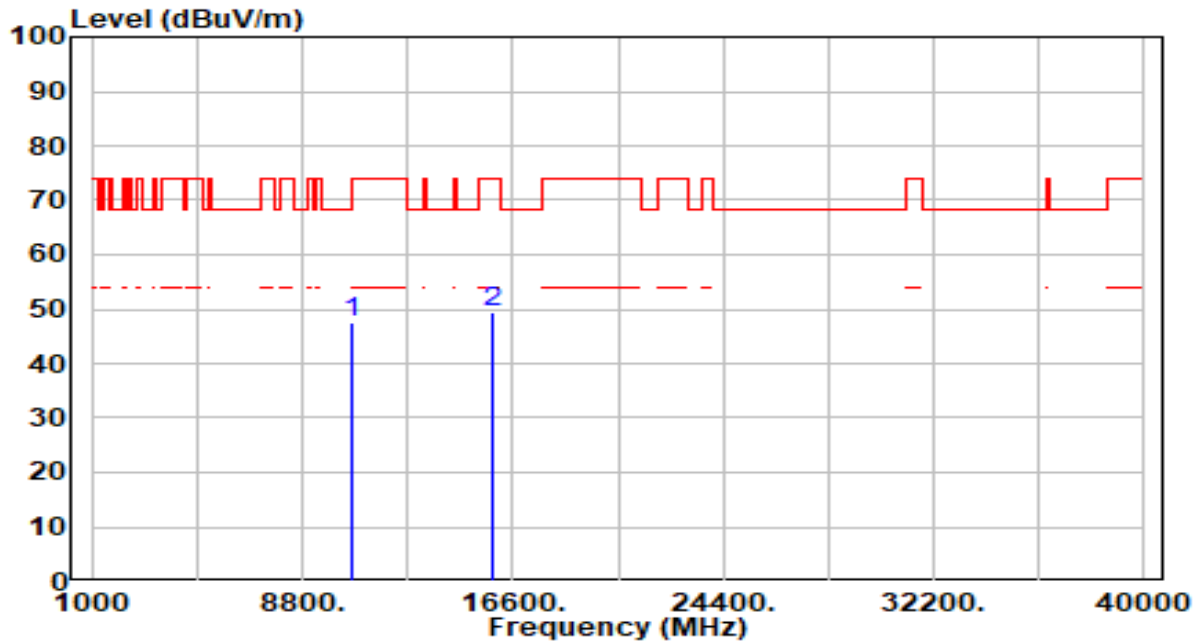


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10600.000	41.06	6.62	47.68	-20.52	68.20	100	226	Peak
2		15900.000	40.37	9.16	49.53	-24.47	74.00	100	261	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band2_CH 60_ANT 0+1	Test Voltage	By Notebook PC

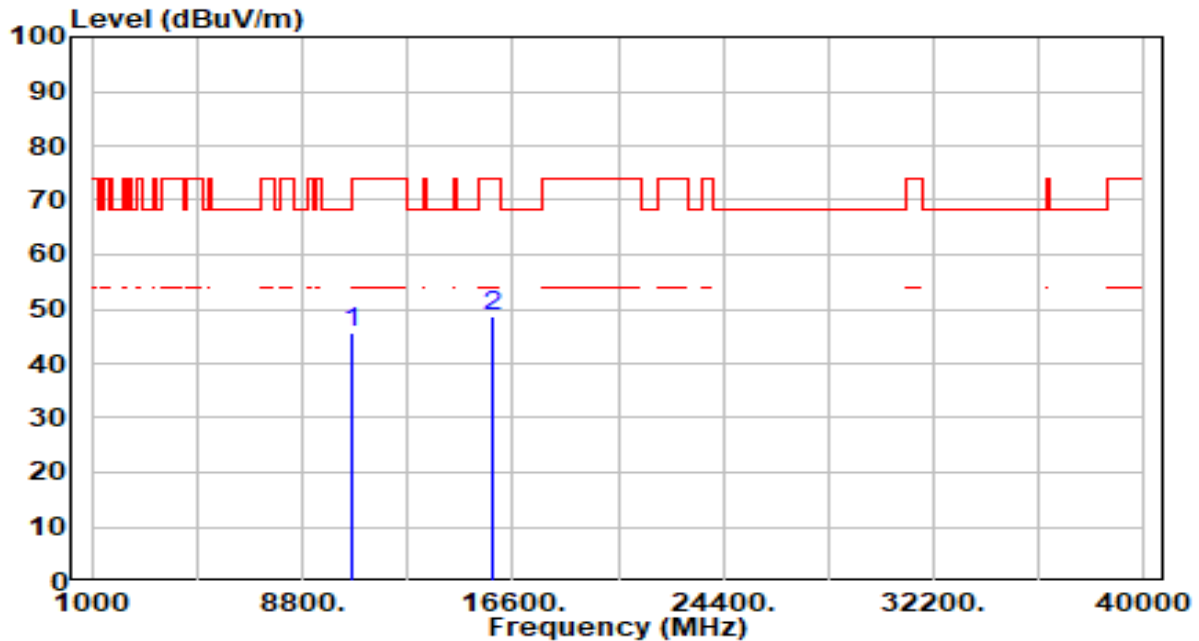


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10600.000	39.13	6.62	45.75	-22.45	68.20	100	339	Peak
2		15900.000	39.54	9.16	48.69	-25.31	74.00	100	79	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	By Notebook PC

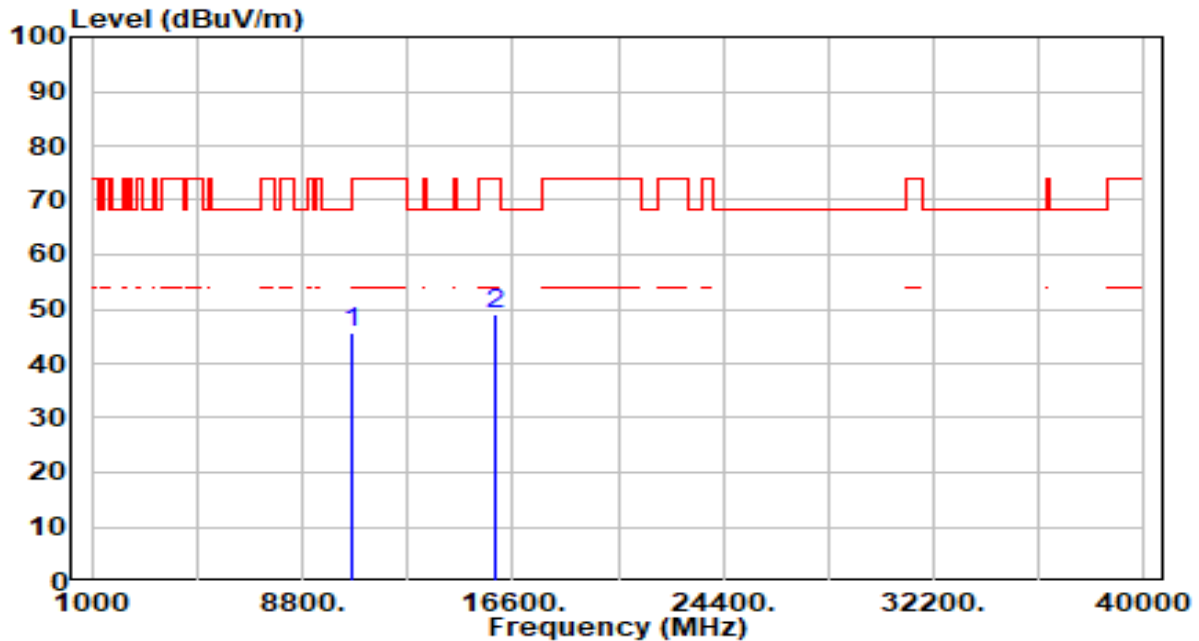


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10640.000	39.15	6.63	45.77	-28.23	74.00	100	129	Peak
2	* 15960.000	39.84	9.13	48.97	-25.03	74.00	100	62	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	By Notebook PC

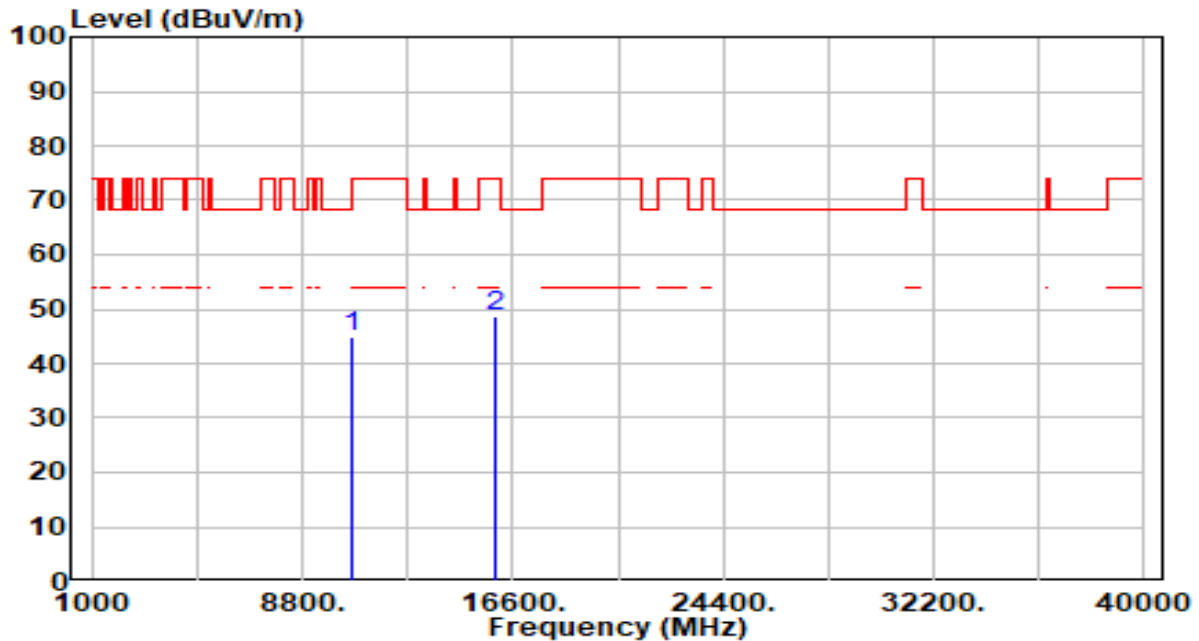


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10640.000	38.18	6.63	44.81	-29.19	74.00	100	274	Peak
2	* 15960.000	39.55	9.13	48.68	-25.32	74.00	100	134	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	By Notebook PC

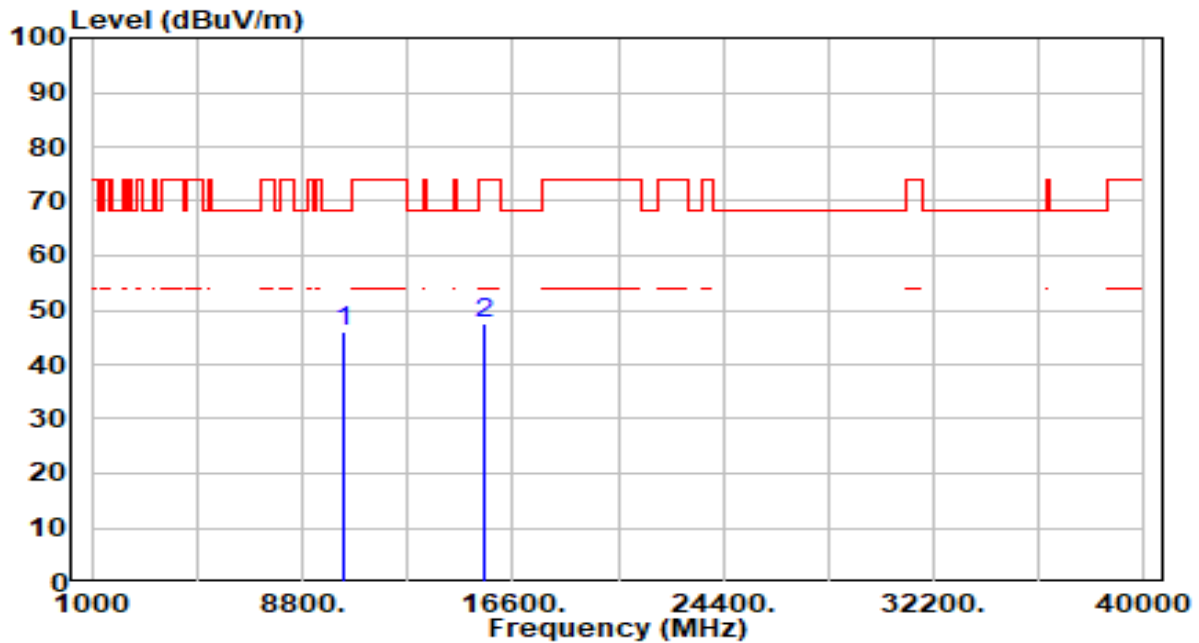


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10380.000	39.05	6.83	45.88	-22.32	68.20	100	328	Peak
2		15570.000	39.02	8.66	47.67	-26.33	74.00	100	219	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	By Notebook PC

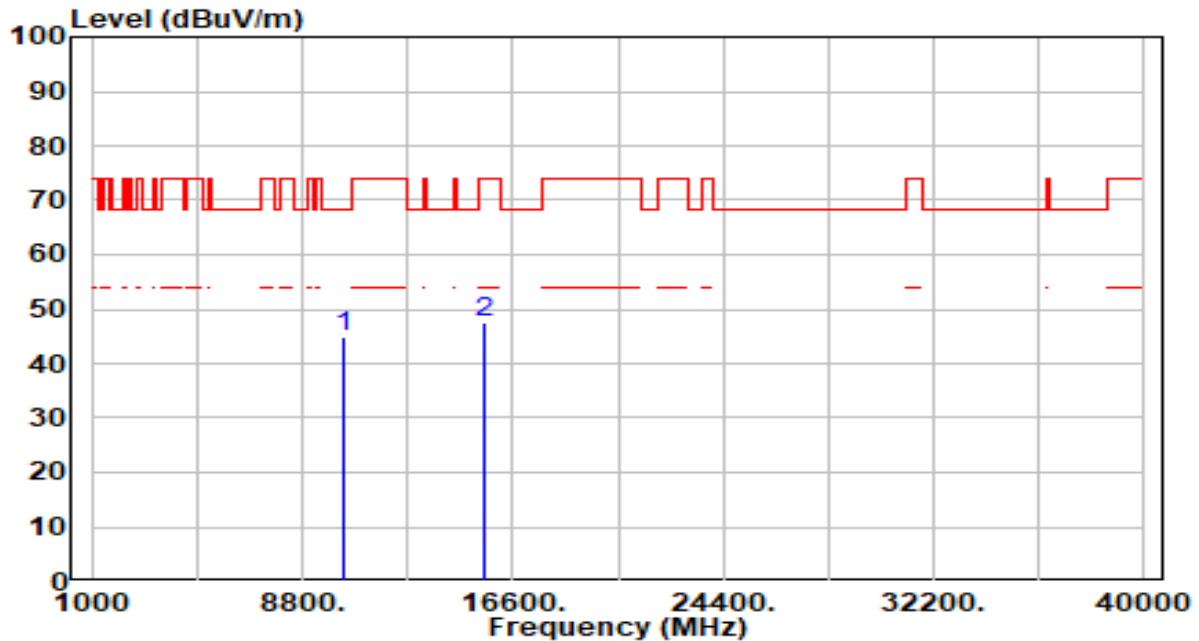


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10380.000	38.17	6.83	45.00	-23.20	68.20	100	343	Peak
2		15570.000	39.01	8.66	47.67	-26.33	74.00	100	52	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band1_CH 46_ANT 0+1	Test Voltage	By Notebook PC

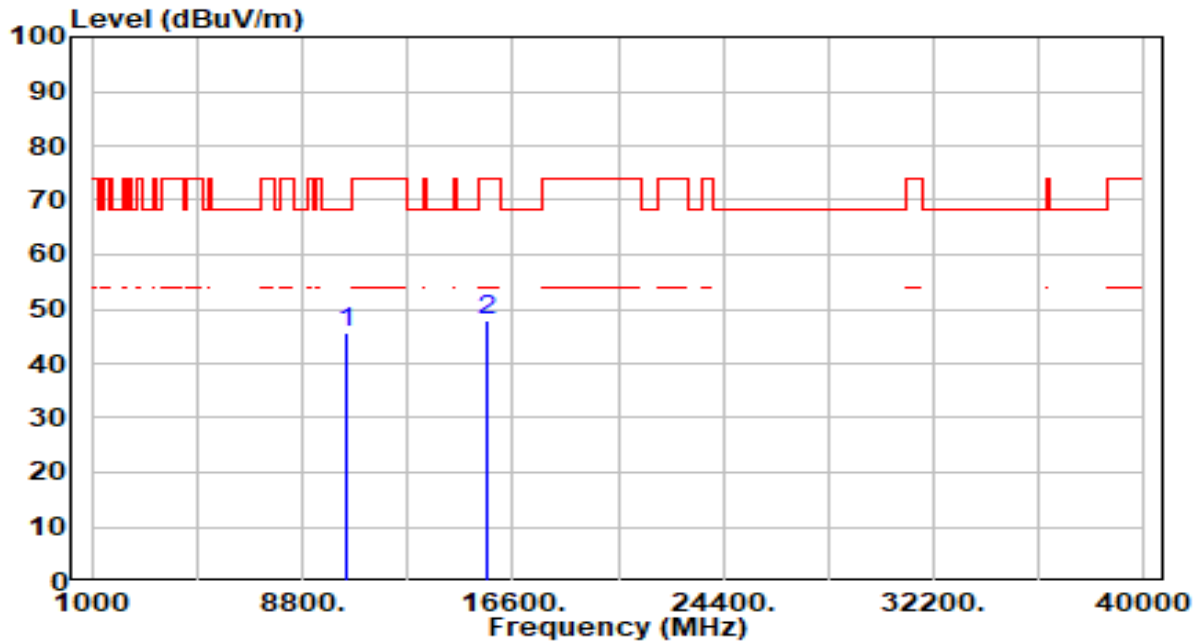


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10460.000	38.91	6.76	45.67	-22.53	68.20	100	142	Peak
2		15690.000	39.21	8.84	48.05	-25.95	74.00	100	259	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band1_CH 46_ANT 0+1	Test Voltage	By Notebook PC

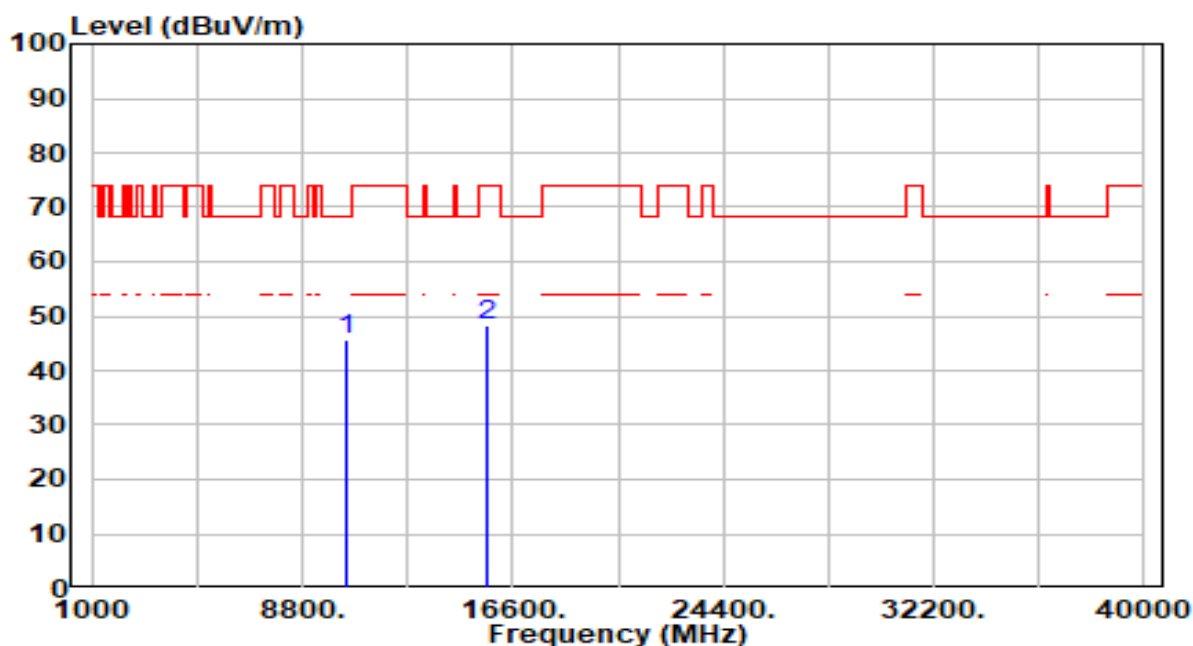


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10460.000	39.00	6.76	45.76	-22.44	68.20	100	273	Peak
2		15690.000	39.29	8.84	48.13	-25.87	74.00	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band2_CH 54_ANT 0+1	Test Voltage	By Notebook PC

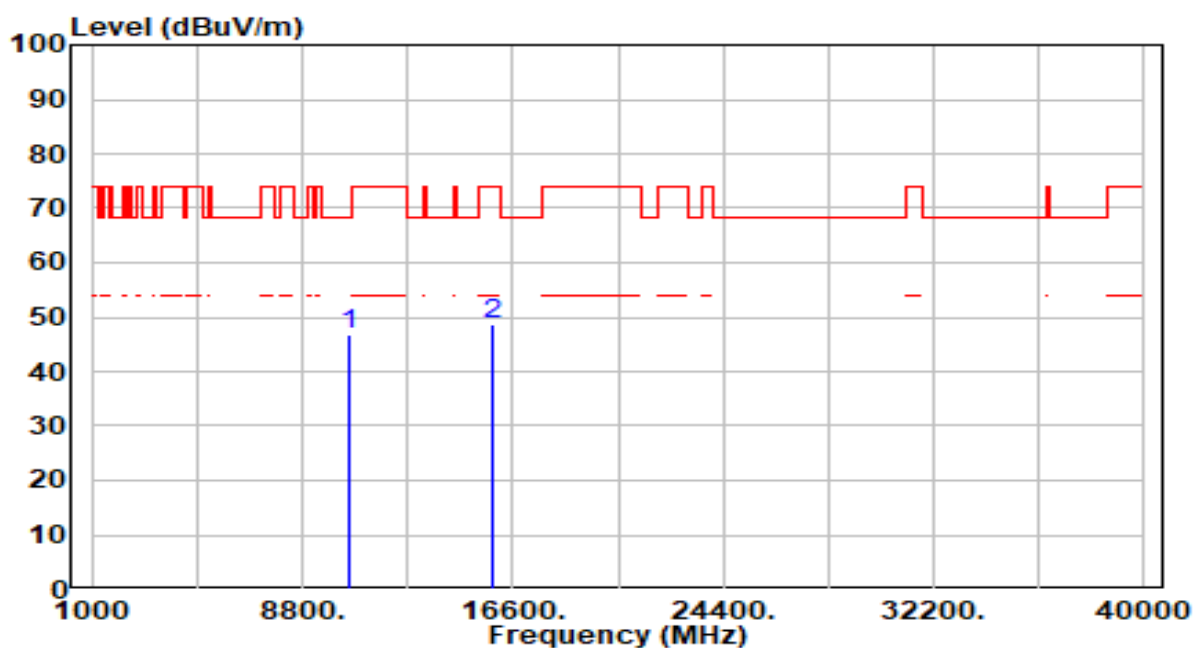


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10540.000	40.24	6.68	46.92	-21.28	68.20	100	158	Peak
2		15810.000	39.70	9.05	48.75	-25.25	74.00	100	48	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band2_CH 54_ANT 0+1	Test Voltage	By Notebook PC

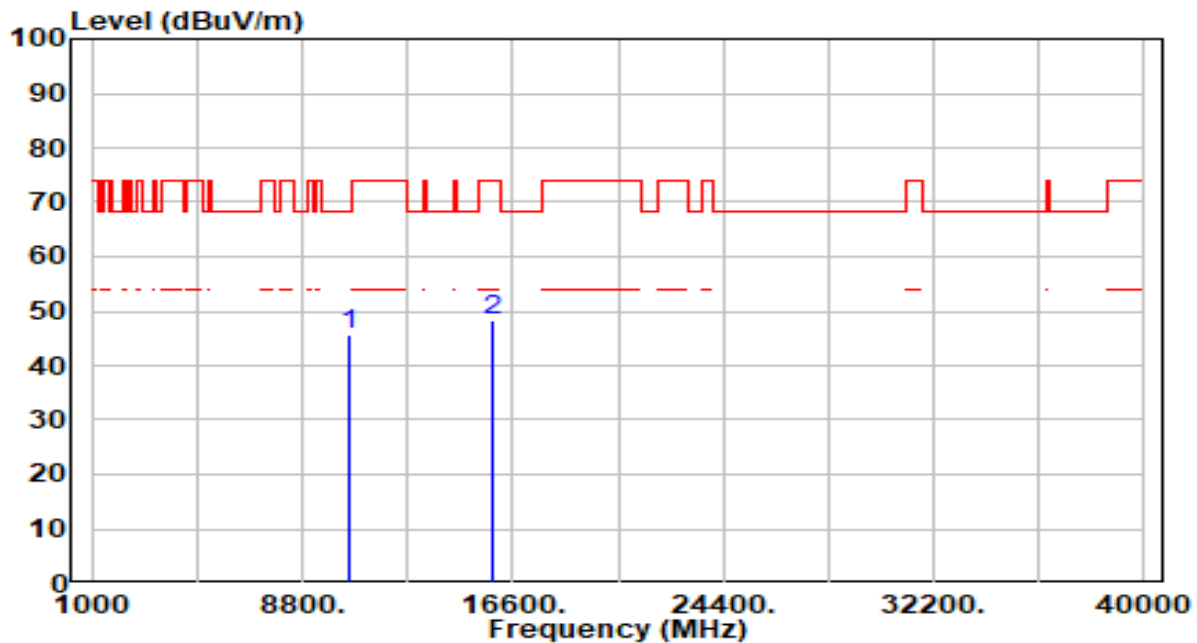


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10540.000	39.14	6.68	45.82	-22.38	68.20	100	311	Peak
2		15810.000	39.28	9.05	48.33	-25.67	74.00	100	231	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	By Notebook PC

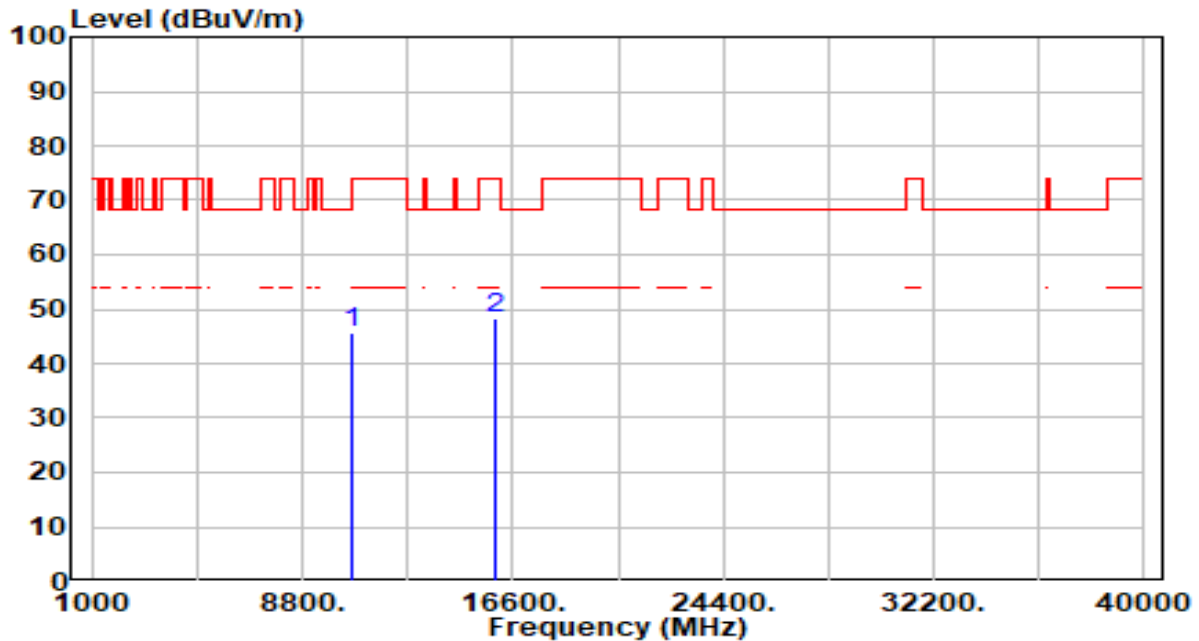


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10620.000	39.01	6.62	45.64	-28.36	74.00	100	179	Peak
2	* 15930.000	39.22	9.14	48.36	-25.64	74.00	100	346	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	By Notebook PC

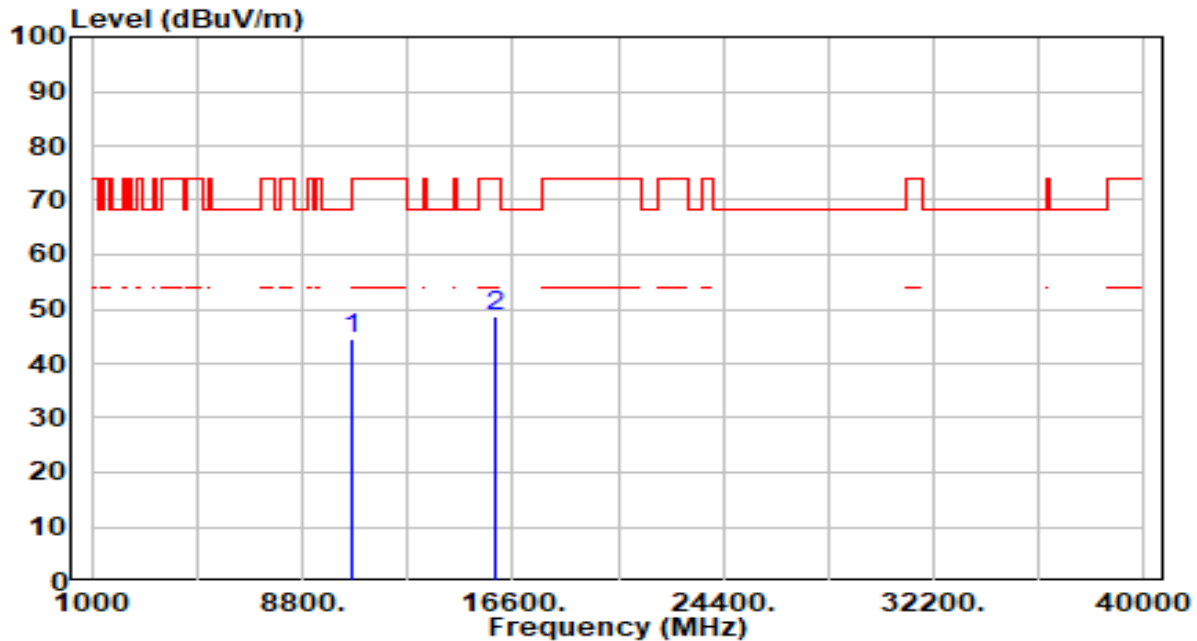


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10620.000	38.02	6.62	44.64	-29.36	74.00	100	140	Peak
2	* 15930.000	39.65	9.14	48.79	-25.21	74.00	100	73	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	By Notebook PC

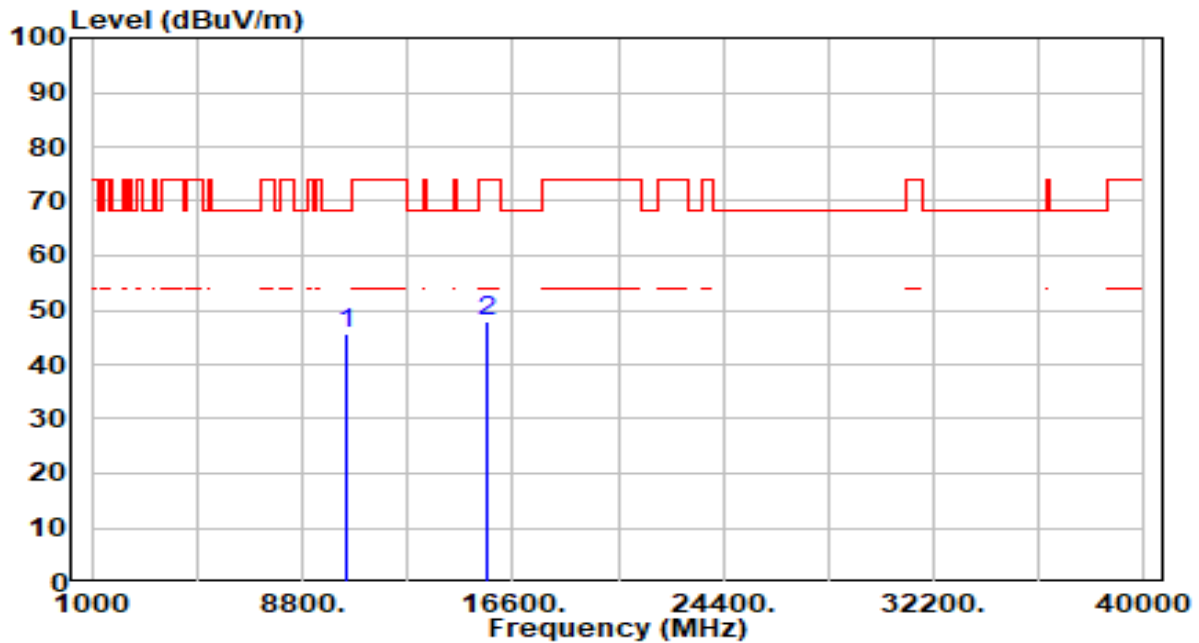


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10420.000	38.97	6.80	45.77	-22.43	68.20	100	360	Peak
2		15630.000	39.17	8.69	47.87	-26.13	74.00	100	192	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	By Notebook PC

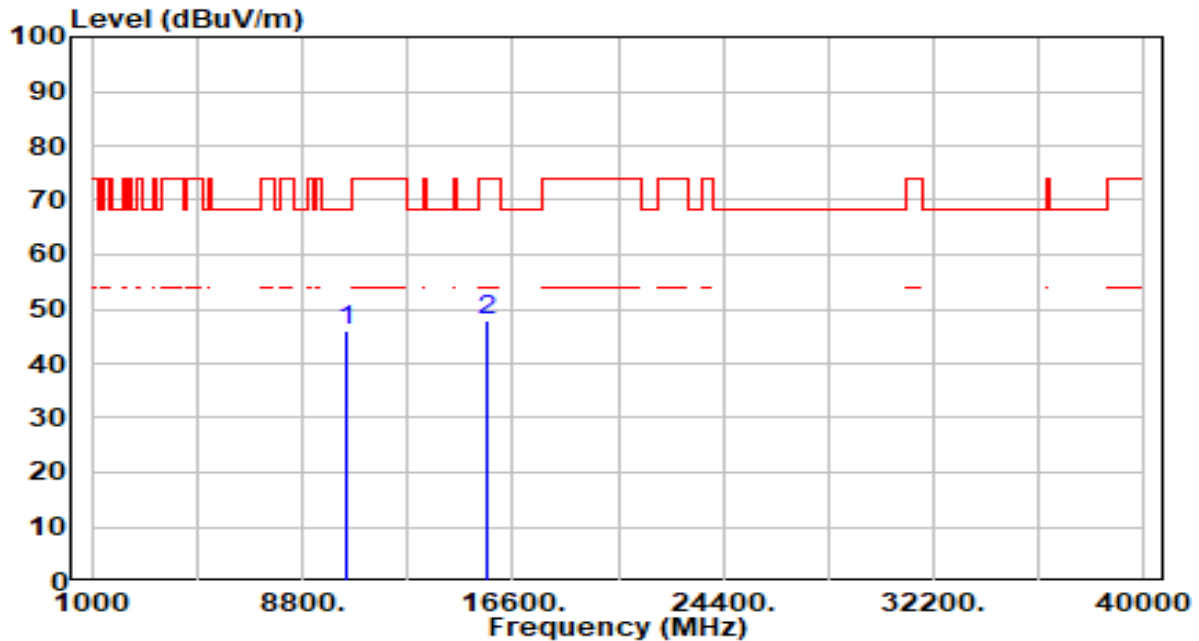


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10420.000	39.29	6.80	46.09	-22.11	68.20	100	168	Peak
2		15630.000	39.27	8.69	47.96	-26.04	74.00	100	101	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	By Notebook PC

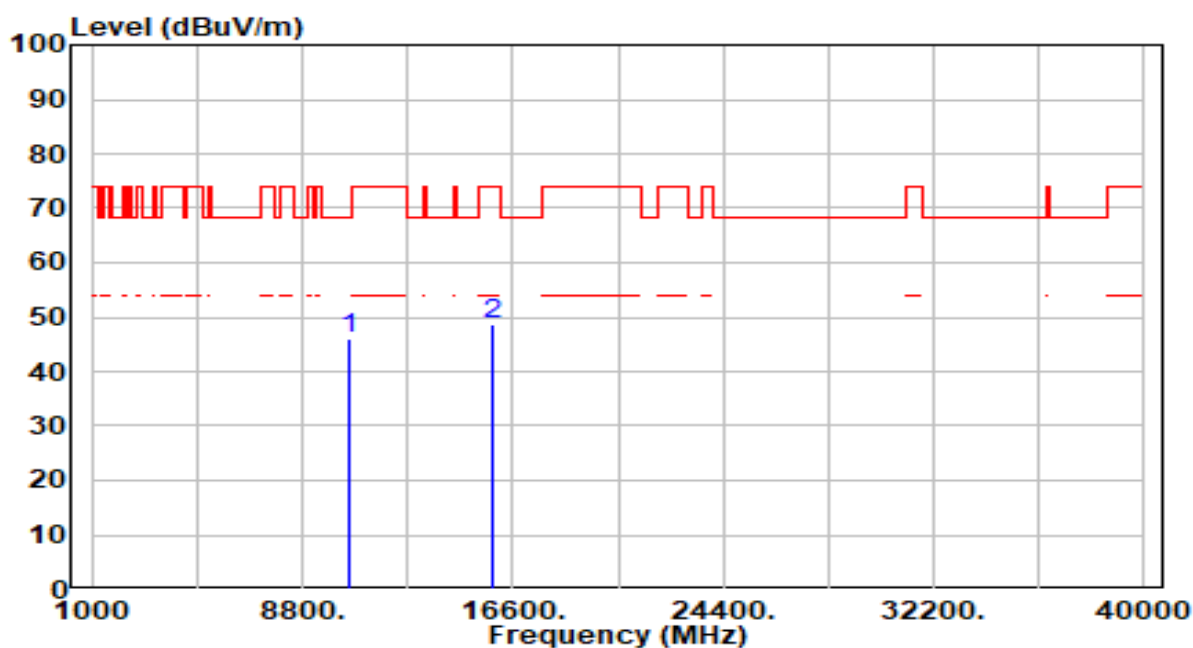


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10580.000	39.46	6.64	46.10	-22.10	68.20	100	315	Peak
2		15870.000	39.70	9.12	48.82	-25.18	74.00	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	By Notebook PC

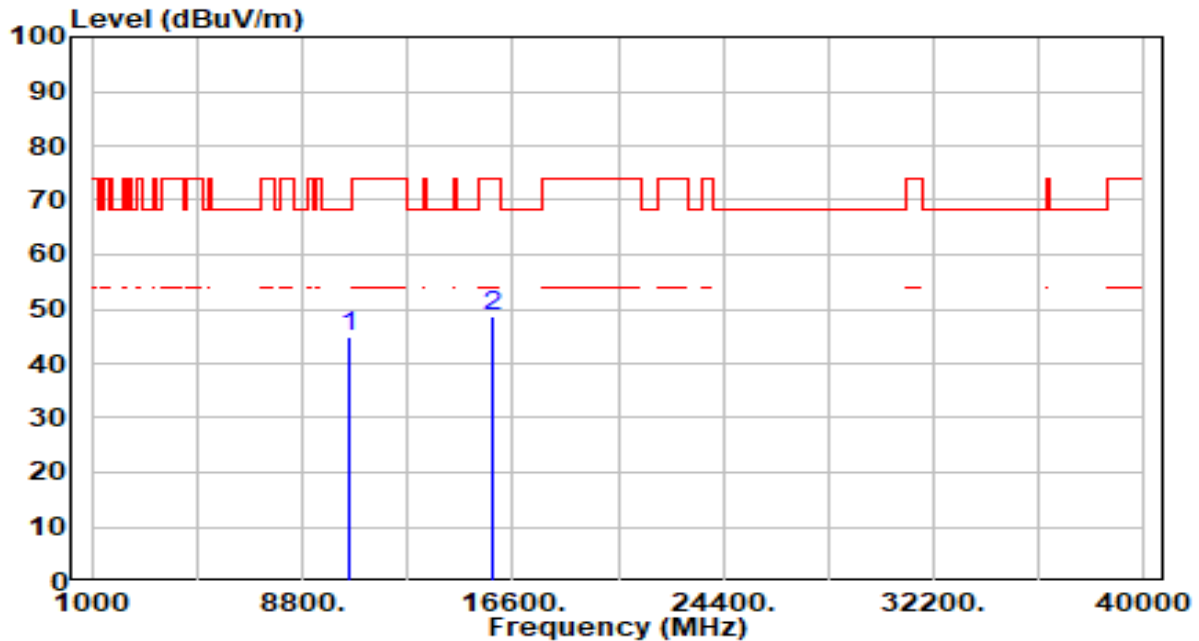


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10580.000	38.16	6.64	44.80	-23.40	68.20	100	319	Peak
2		15870.000	39.42	9.12	48.55	-25.45	74.00	100	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	By Notebook PC

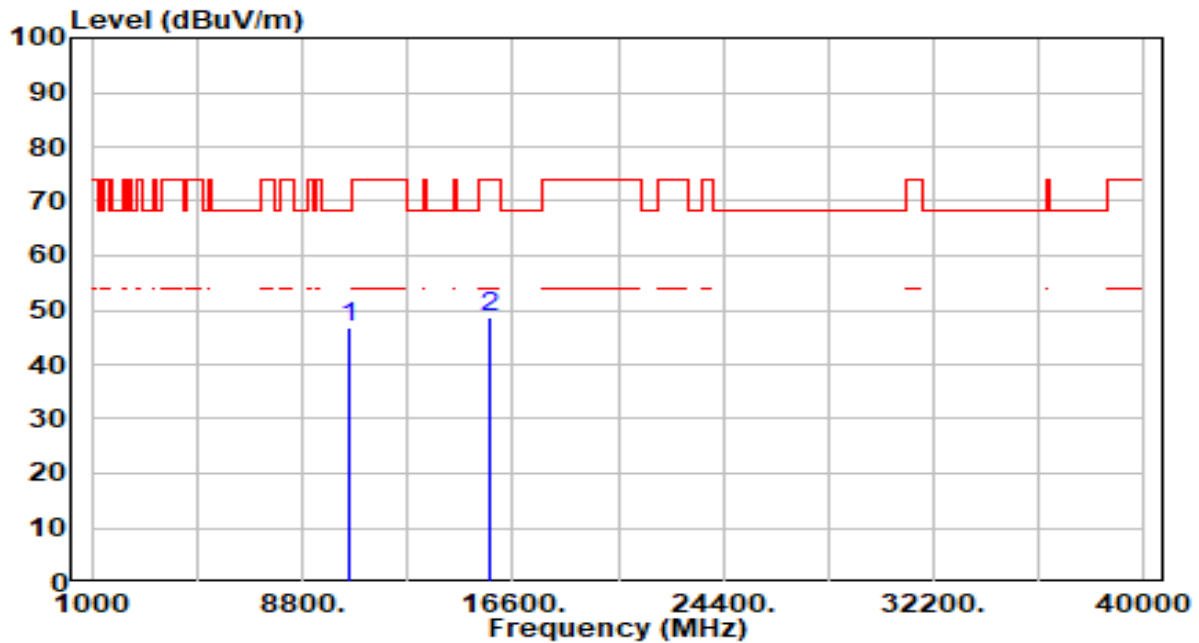


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10500.000	39.96	6.71	46.67	-21.53	68.20	100	223	Peak
2		15750.000	39.74	8.95	48.69	-25.31	74.00	100	199	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	By Notebook PC

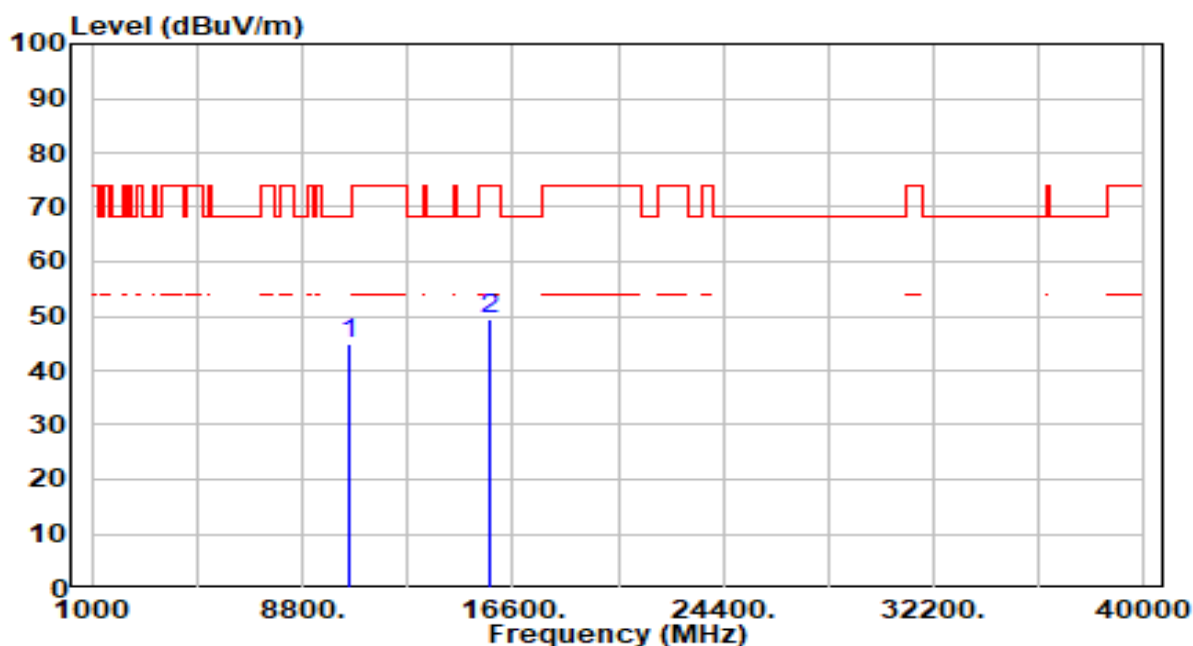


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10500.000	38.13	6.71	44.84	-23.36	68.20	100	0	Peak
2		15750.000	40.39	8.95	49.34	-24.66	74.00	100	253	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	By Notebook PC

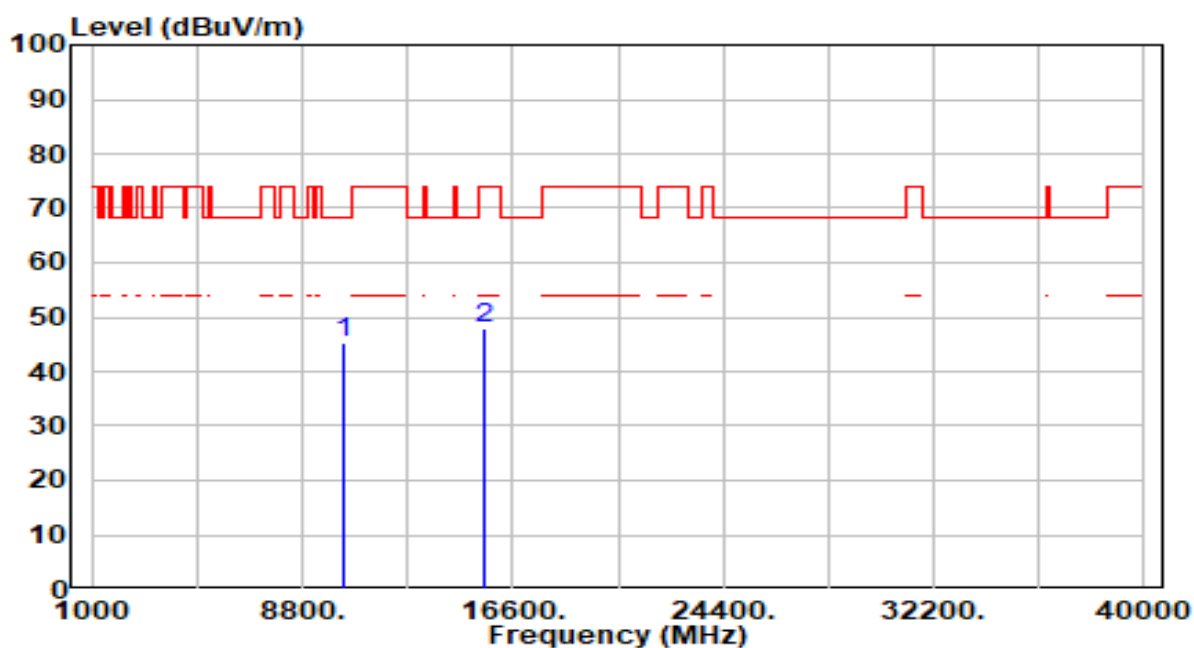


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10360.000	38.33	6.84	45.18	-23.02	68.20	100	238	Peak
2		15540.000	39.38	8.70	48.08	-25.92	74.00	100	311	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	By Notebook PC

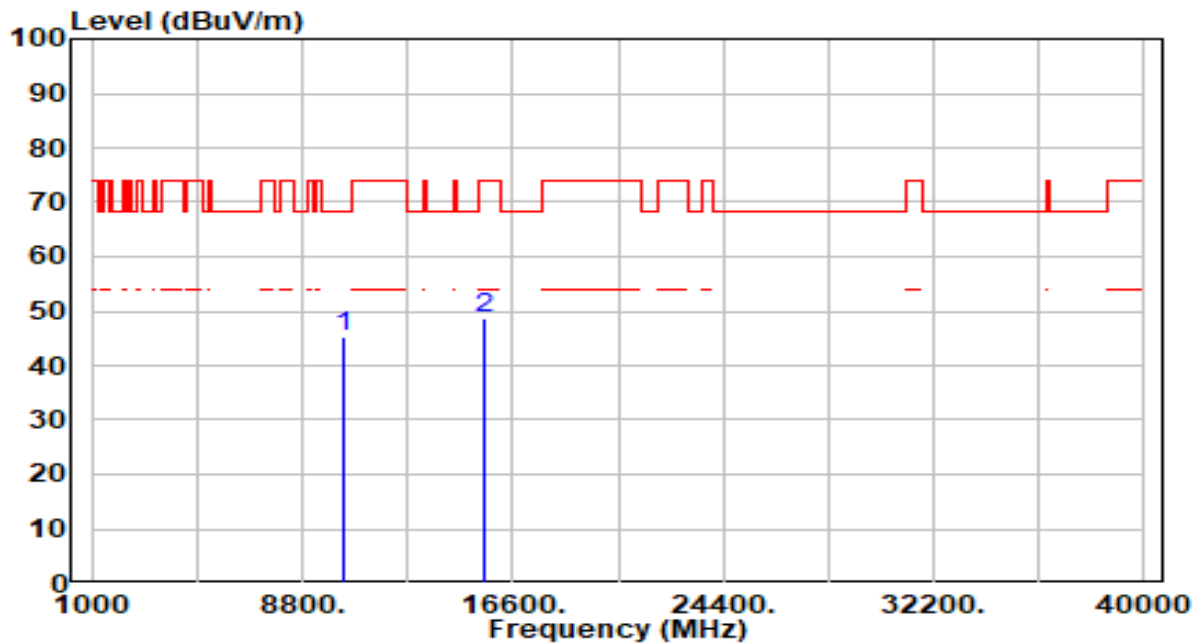


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10360.000	38.56	6.84	45.40	-22.80	68.20	100	179	Peak
2		15540.000	39.84	8.70	48.54	-25.46	74.00	100	277	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band1_CH 40_ANT 0+1	Test Voltage	By Notebook PC

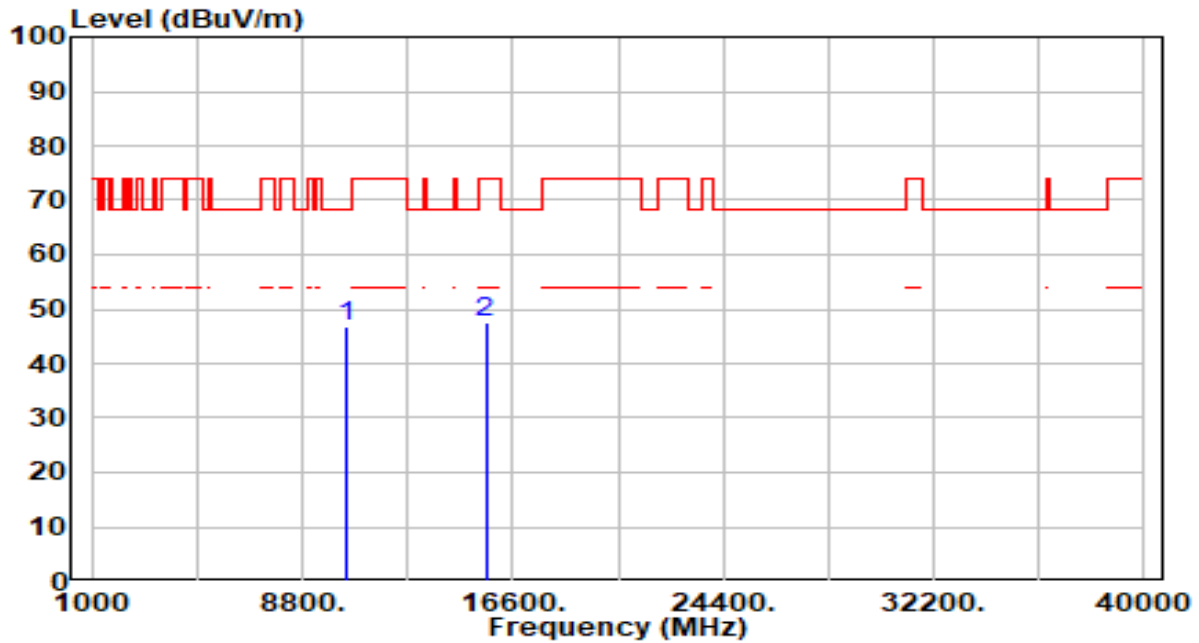


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10400.000	39.97	6.82	46.79	-21.41	68.20	100	188	Peak
2		15600.000	39.00	8.62	47.62	-26.38	74.00	100	244	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band1_CH 40_ANT 0+1	Test Voltage	By Notebook PC

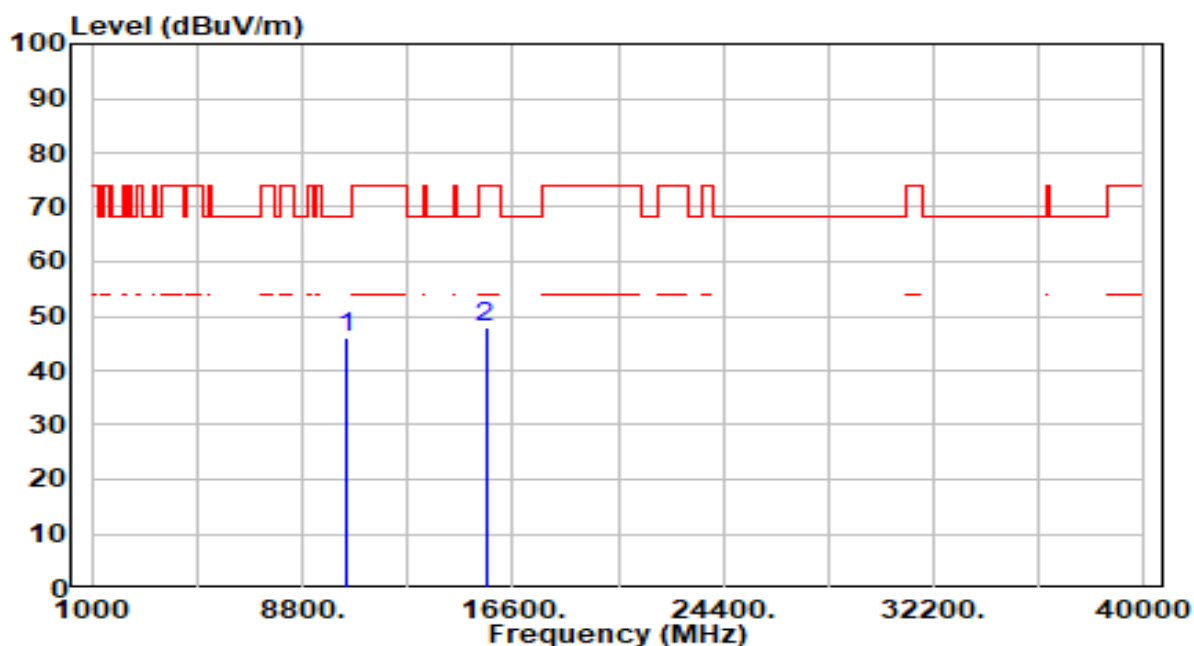


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10400.000	39.29	6.82	46.10	-22.10	68.20	100	41	Peak
2		15600.000	39.48	8.62	48.10	-25.90	74.00	100	79	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band1_CH 48_ANT 0+1	Test Voltage	By Notebook PC

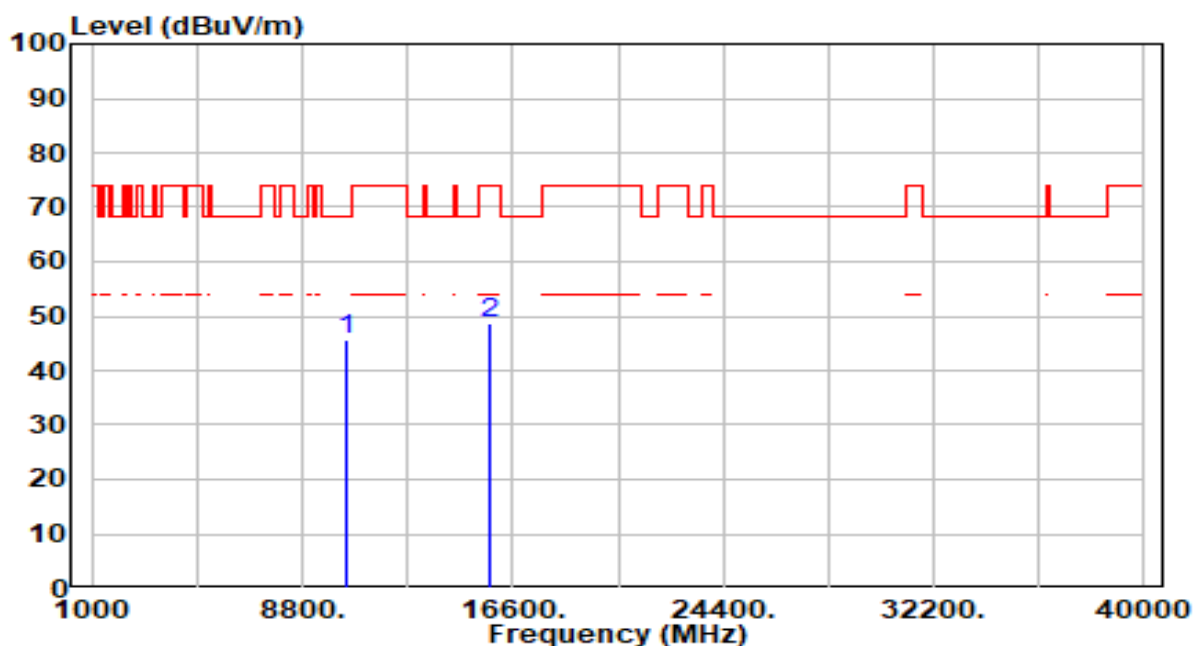


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10480.000	39.08	6.74	45.82	-22.38	68.20	100	234	Peak
2		15720.000	39.85	8.90	48.75	-25.25	74.00	100	86	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band1_CH 48_ANT 0+1	Test Voltage	By Notebook PC

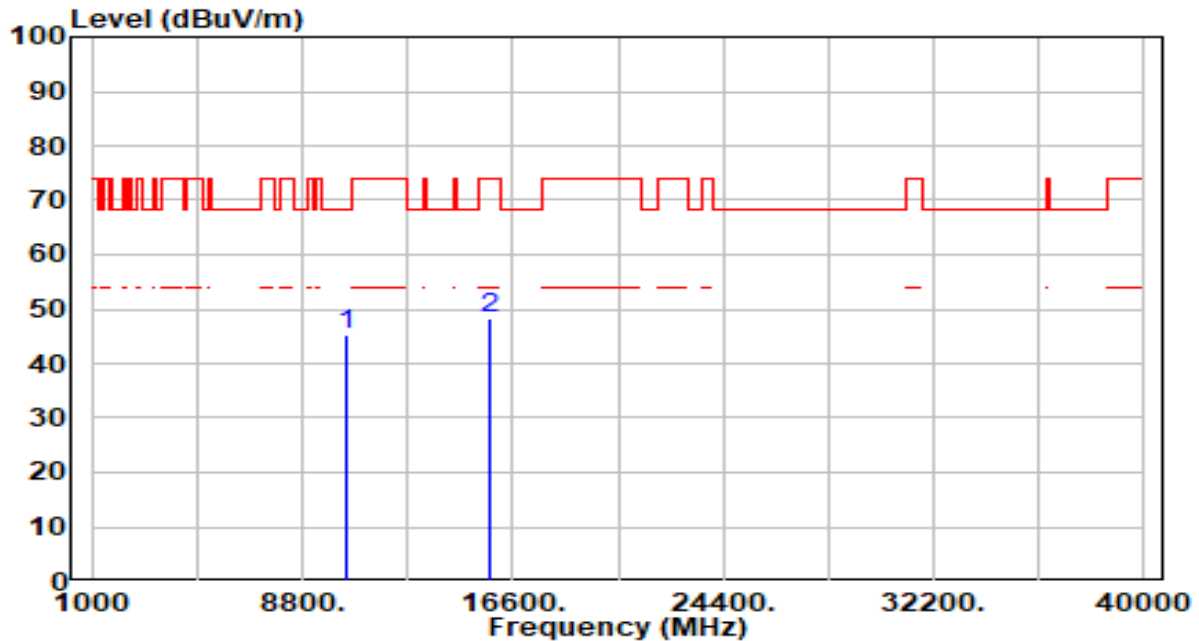


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10480.000	38.42	6.74	45.16	-23.04	68.20	100	96	Peak
2		15720.000	39.38	8.90	48.28	-25.72	74.00	100	264	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band2_CH 52_ANT 0+1	Test Voltage	By Notebook PC

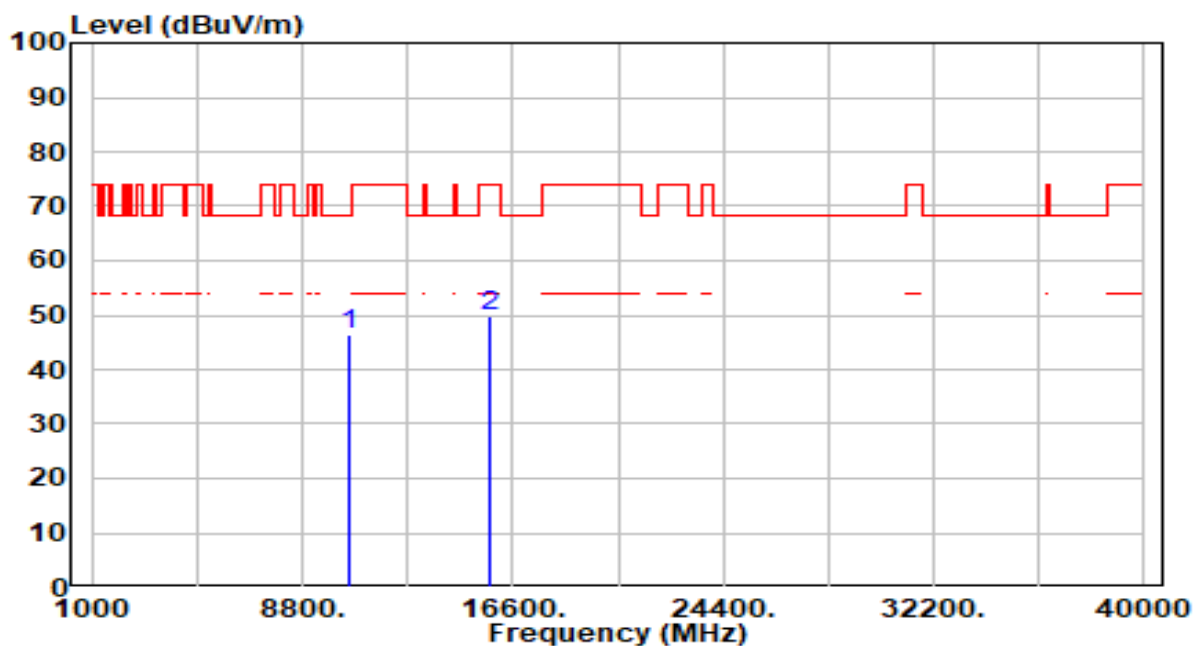


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10520.000	39.72	6.70	46.41	-21.79	68.20	100	62	Peak
2		15780.000	40.70	9.00	49.70	-24.30	74.00	100	93	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band2_CH 52_ANT 0+1	Test Voltage	By Notebook PC

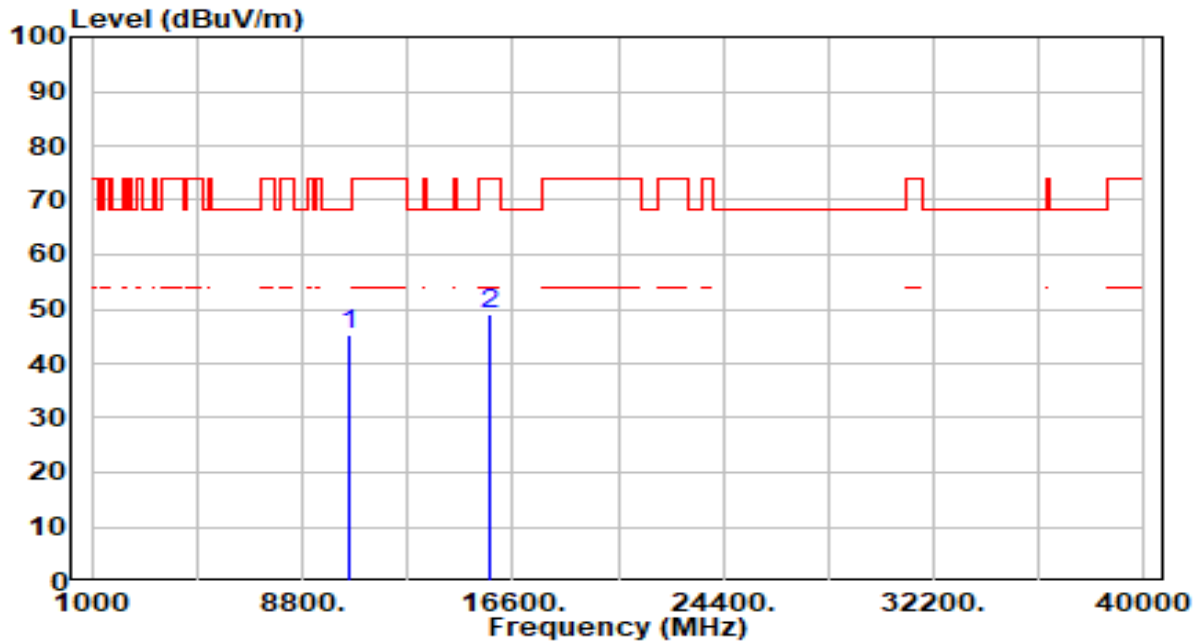


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10520.000	38.72	6.70	45.41	-22.79	68.20	100	360	Peak
2		15780.000	39.98	9.00	48.98	-25.02	74.00	100	136	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band2_CH 60_ANT 0+1	Test Voltage	By Notebook PC

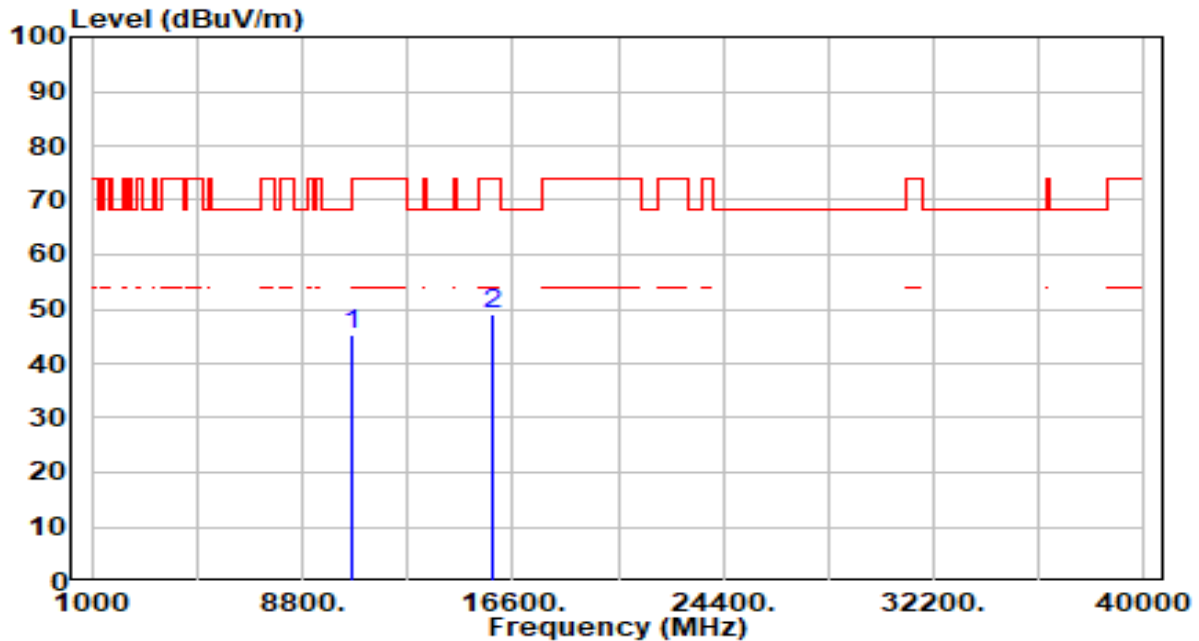


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10600.000	38.67	6.62	45.29	-22.91	68.20	100	13	Peak
2		15900.000	39.93	9.16	49.09	-24.91	74.00	100	17	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band2_CH 60_ANT 0+1	Test Voltage	By Notebook PC

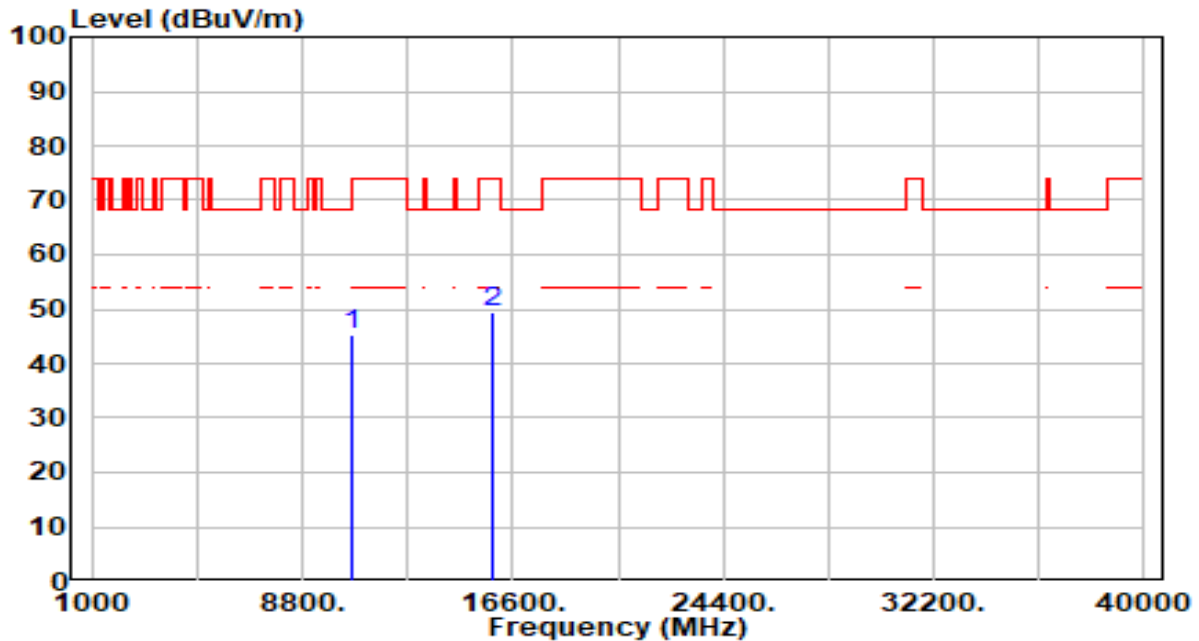


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10600.000	38.64	6.62	45.26	-22.94	68.20	100	209	Peak
2		15900.000	40.11	9.16	49.27	-24.73	74.00	100	117	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	By Notebook PC

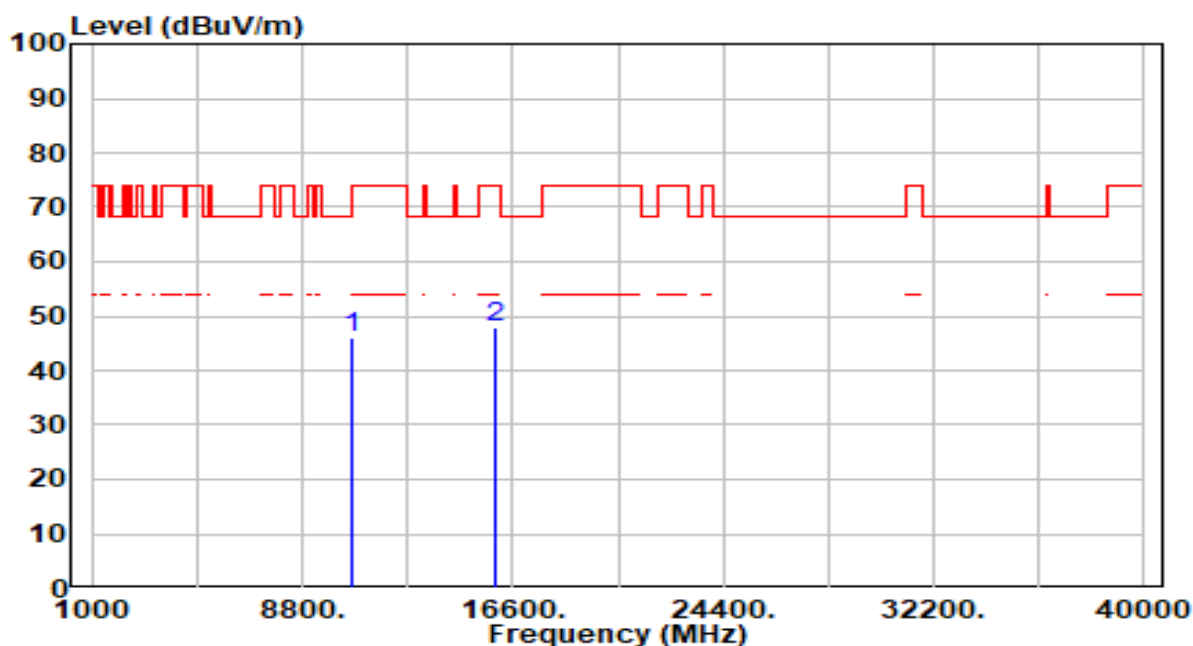


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10640.000	39.27	6.63	45.90	-28.10	74.00	100	360	Peak
2	* 15960.000	38.89	9.13	48.02	-25.98	74.00	100	210	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	By Notebook PC

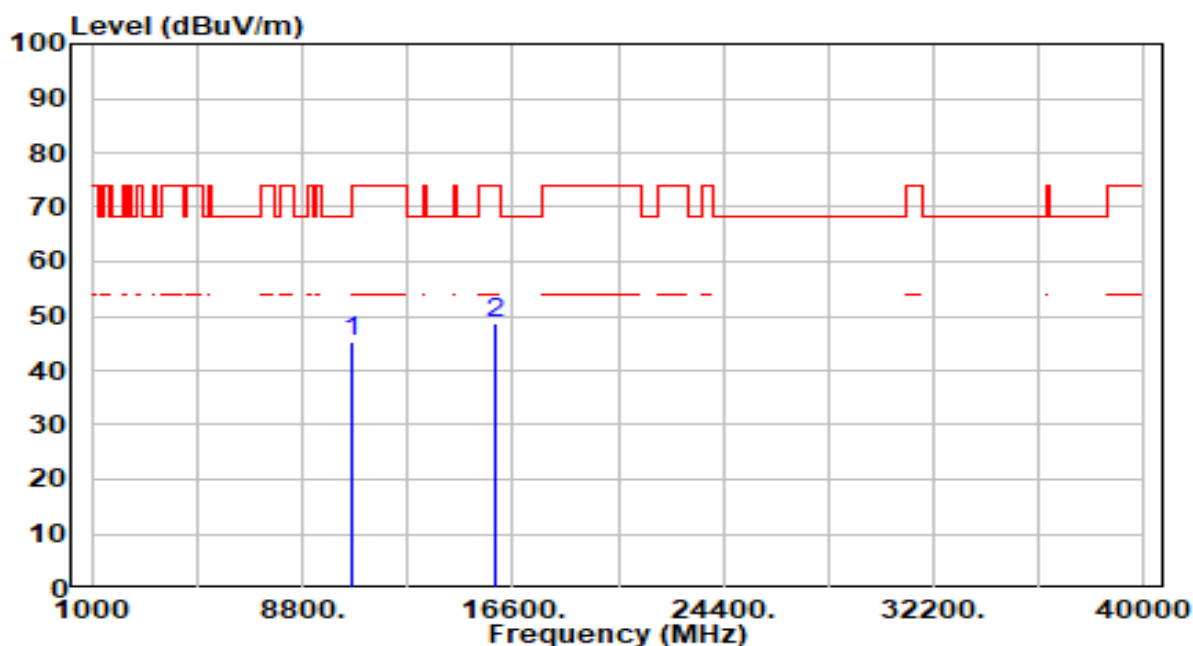


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10640.000	38.55	6.63	45.18	-28.82	74.00	100	184	Peak
2	* 15960.000	39.40	9.13	48.53	-25.47	74.00	100	301	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	By Notebook PC

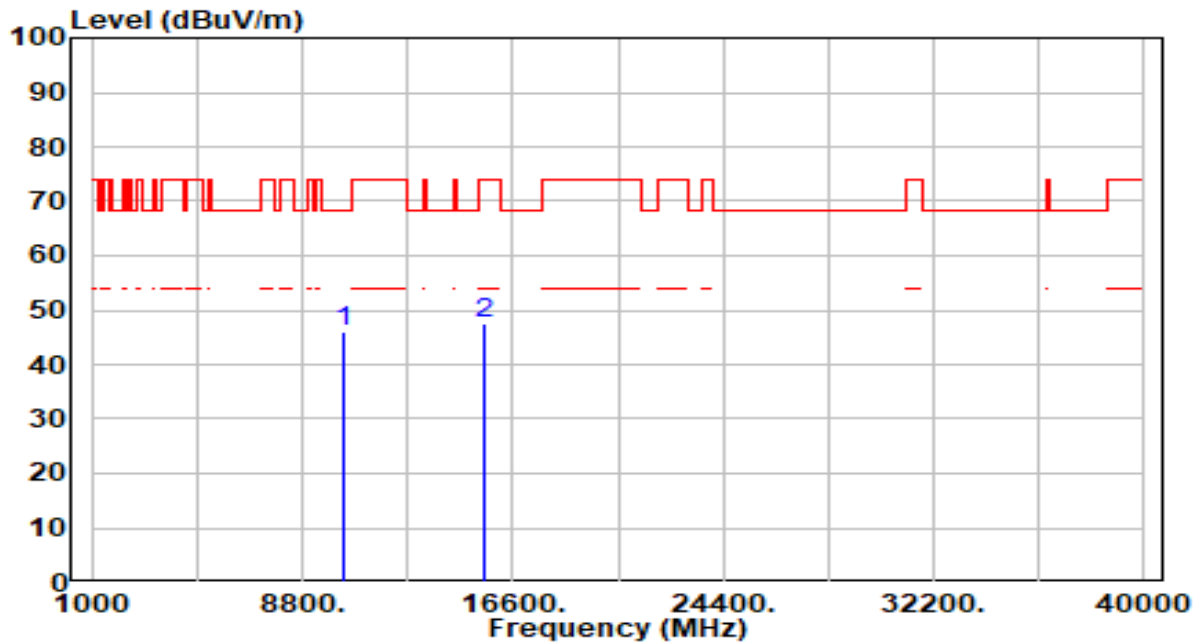


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10380.000	39.28	6.83	46.11	-22.09	68.20	100	108	Peak
2		15570.000	39.03	8.66	47.69	-26.31	74.00	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	By Notebook PC

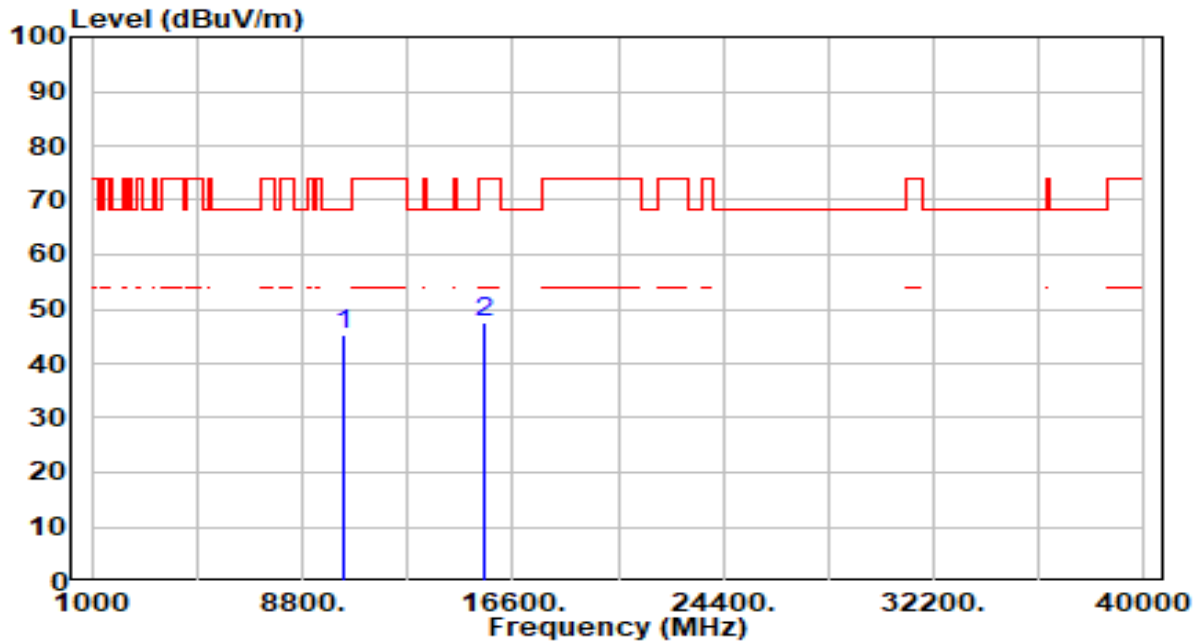


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10380.000	38.57	6.83	45.40	-22.80	68.20	100	153	Peak
2		15570.000	38.95	8.66	47.61	-26.39	74.00	100	196	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band1_CH 46_ANT 0+1	Test Voltage	By Notebook PC

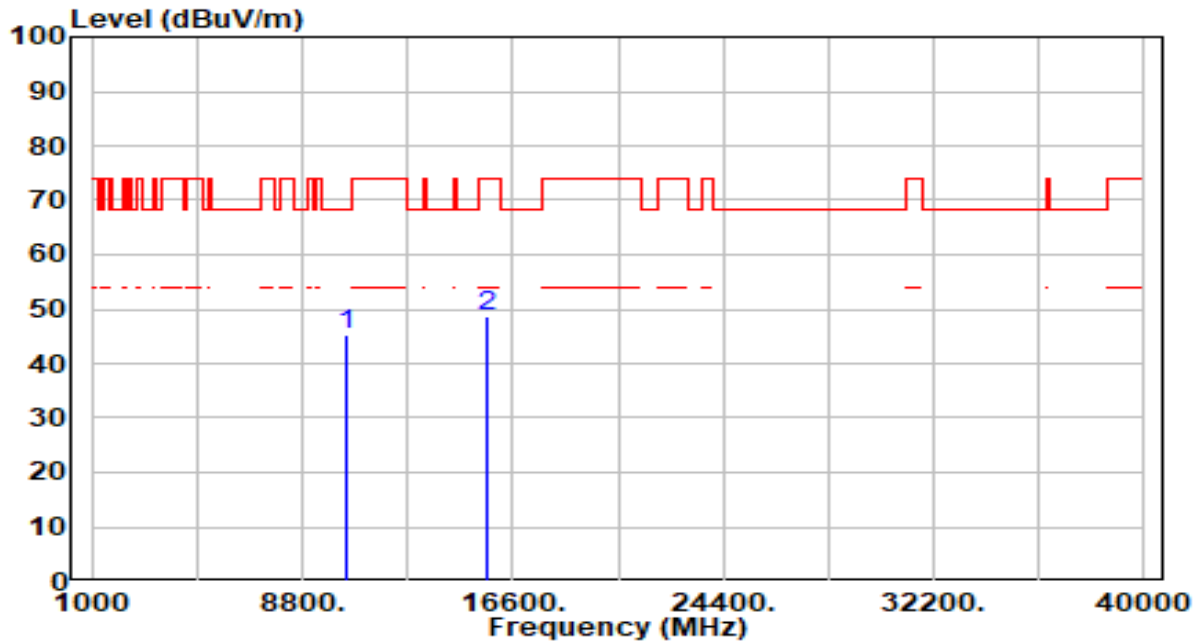


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10460.000	38.46	6.76	45.22	-22.98	68.20	100	331	Peak
2		15690.000	40.00	8.84	48.84	-25.16	74.00	100	317	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band1_CH 46_ANT 0+1	Test Voltage	By Notebook PC

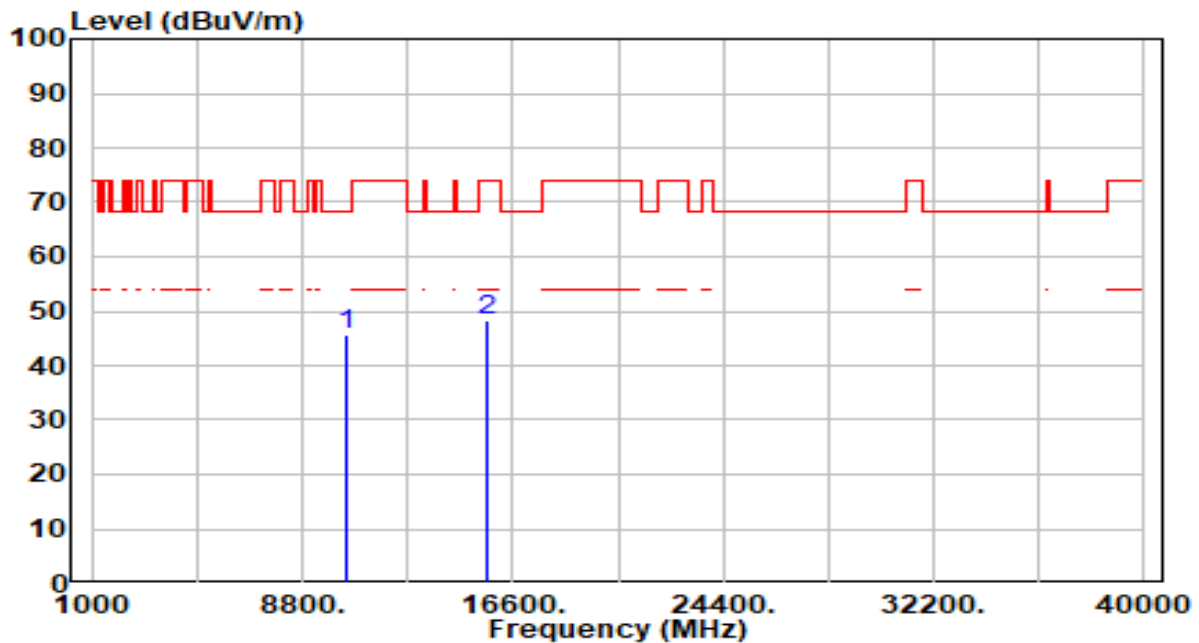


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10460.000	38.92	6.76	45.68	-22.52	68.20	100	340	Peak
2		15690.000	39.44	8.84	48.28	-25.72	74.00	100	157	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band2_CH 54_ANT 0+1	Test Voltage	By Notebook PC

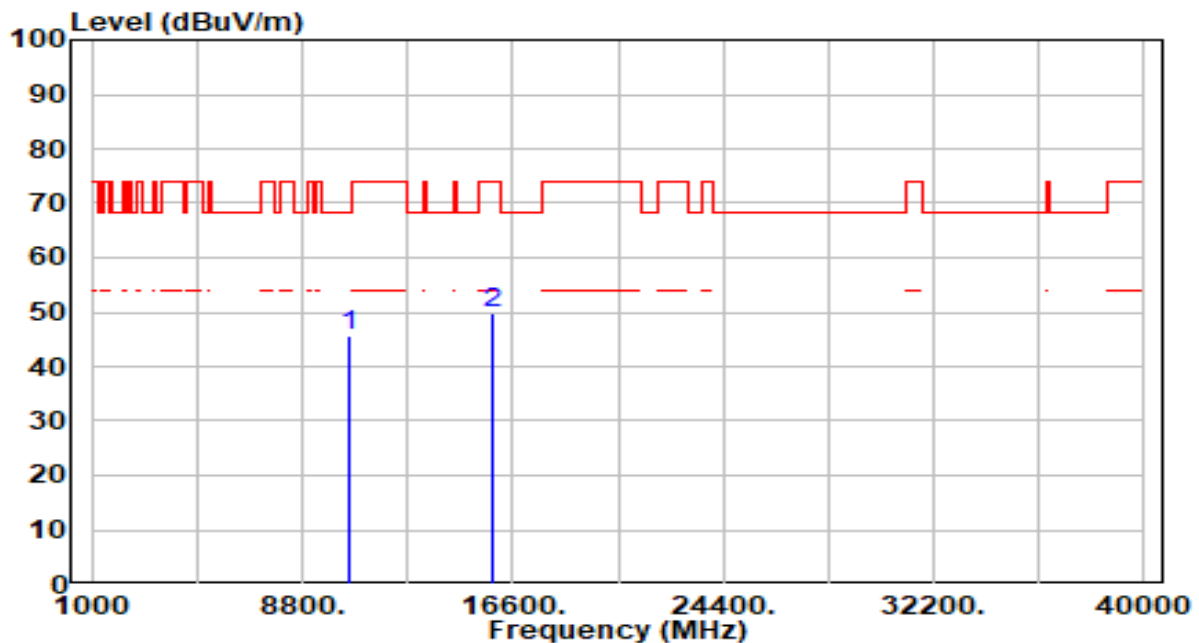


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10540.000	39.08	6.68	45.75	-22.45	68.20	100	14	Peak
2		15810.000	40.86	9.05	49.91	-24.09	74.00	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band2_CH 54_ANT 0+1	Test Voltage	By Notebook PC

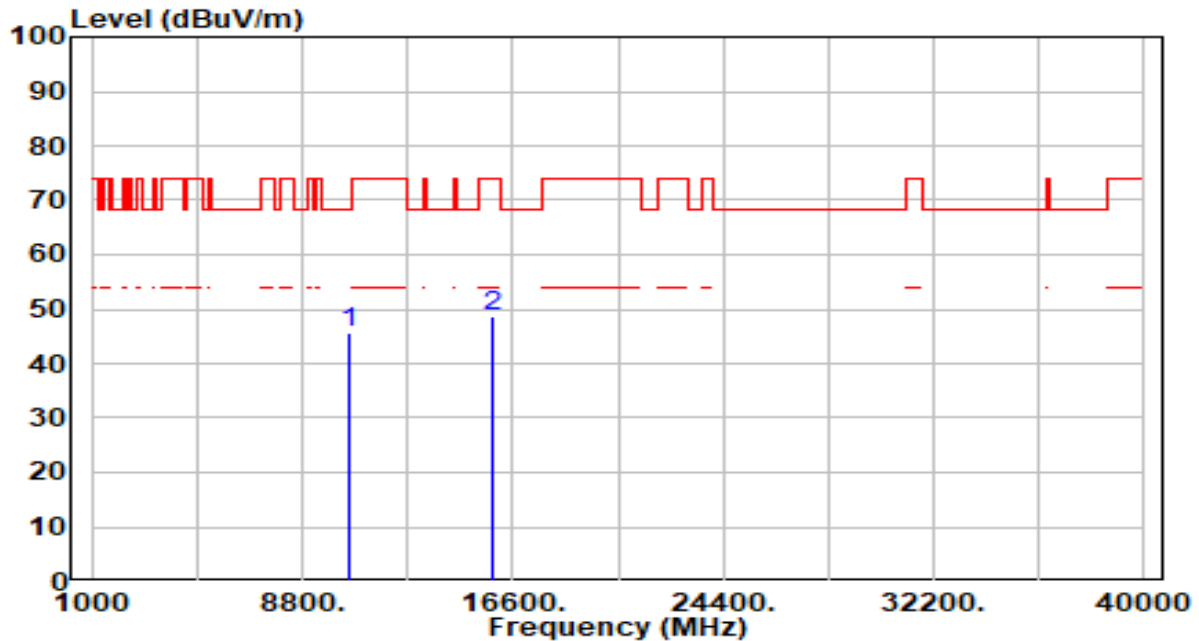


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10540.000	38.96	6.68	45.64	-22.56	68.20	100	0	Peak
2		15810.000	39.48	9.05	48.53	-25.47	74.00	100	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	By Notebook PC

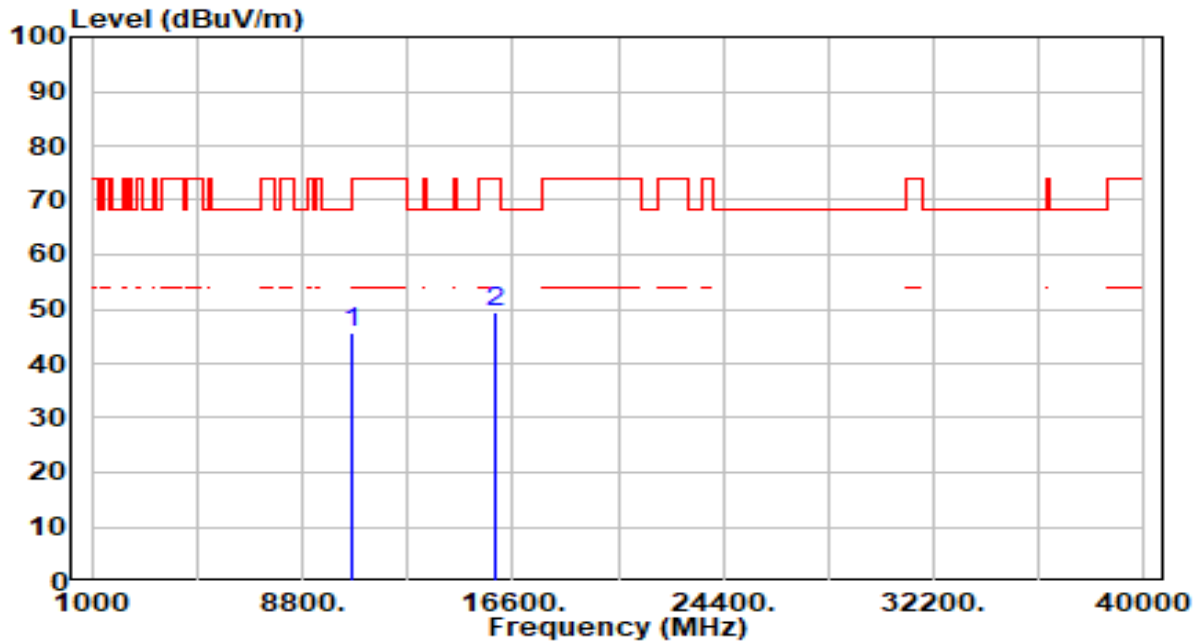


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10620.000	39.04	6.62	45.66	-28.34	74.00	100	75	Peak
2	* 15930.000	40.41	9.14	49.55	-24.45	74.00	100	209	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	By Notebook PC

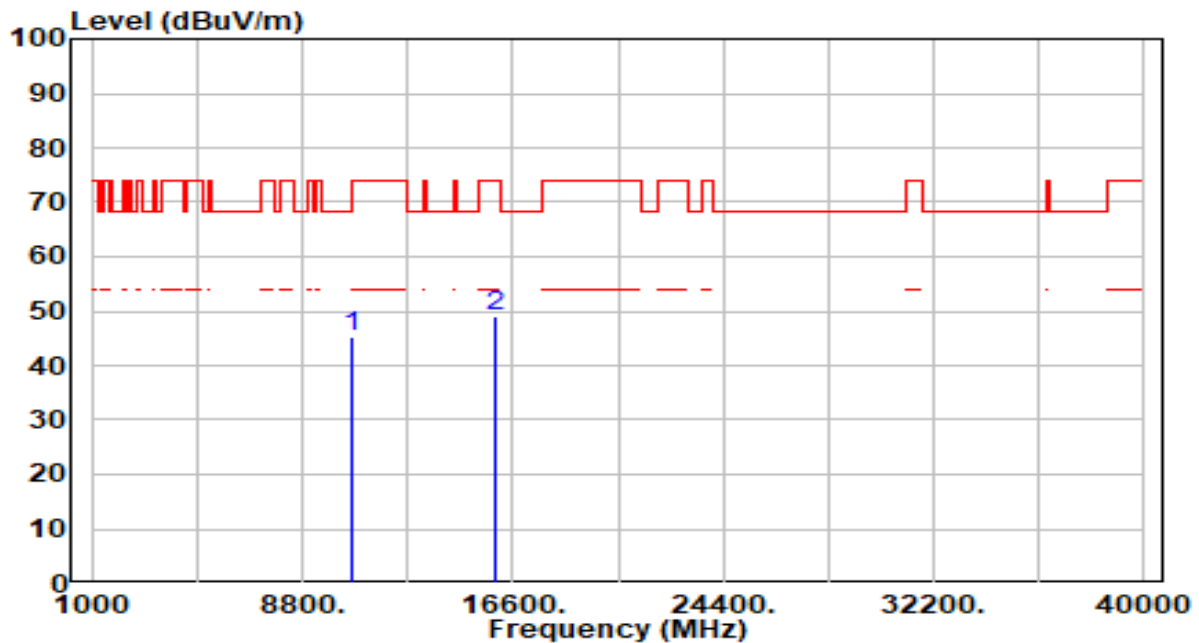


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10620.000	38.78	6.62	45.41	-28.59	74.00	100	360	Peak
2	* 15930.000	39.84	9.14	48.99	-25.01	74.00	100	161	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	By Notebook PC

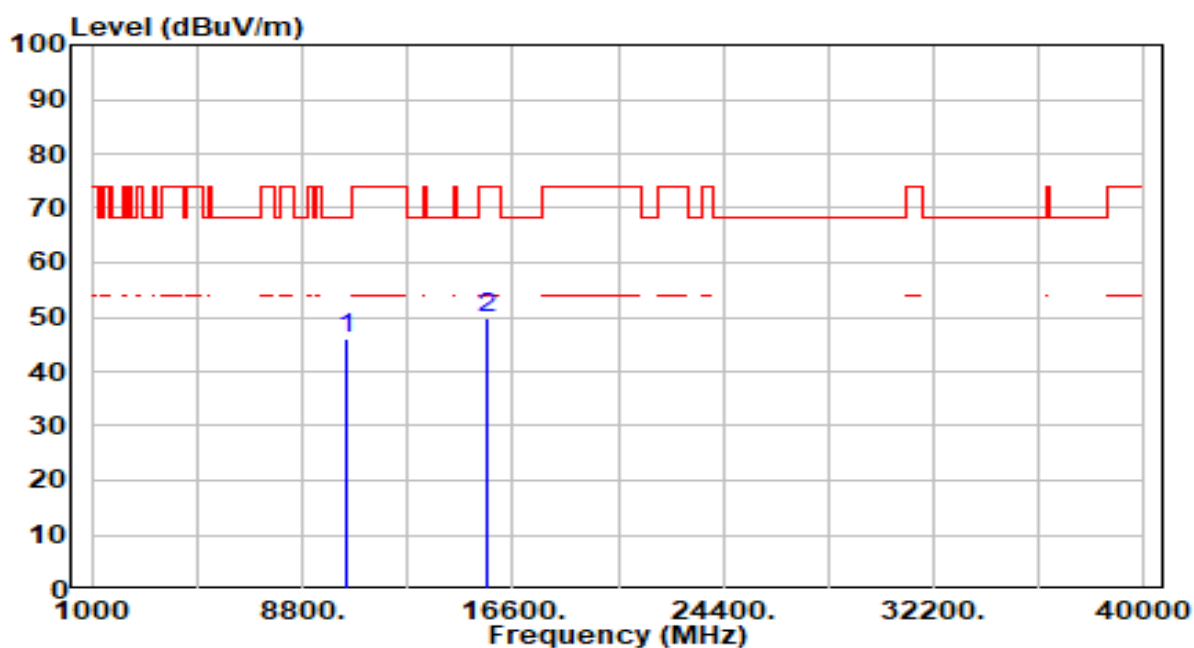


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10420.000	39.07	6.80	45.87	-22.33	68.20	100	150	Peak
2		15630.000	41.01	8.69	49.70	-24.30	74.00	100	111	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	By Notebook PC

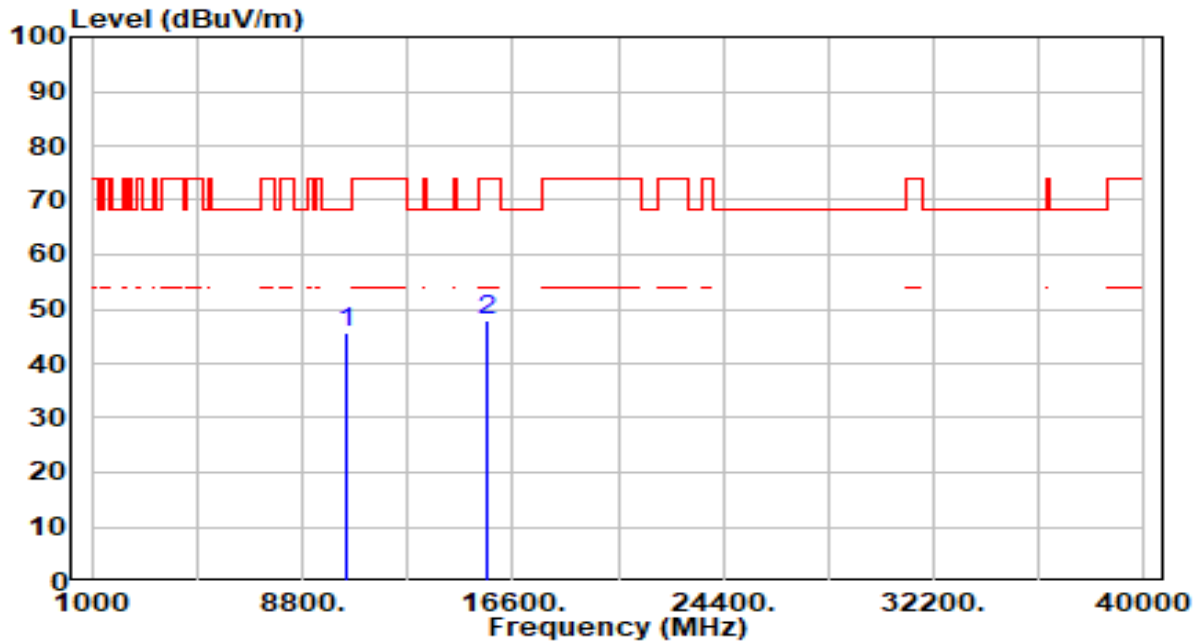


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10420.000	38.68	6.80	45.48	-22.72	68.20	100	47	Peak
2		15630.000	39.24	8.69	47.93	-26.07	74.00	100	266	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	By Notebook PC

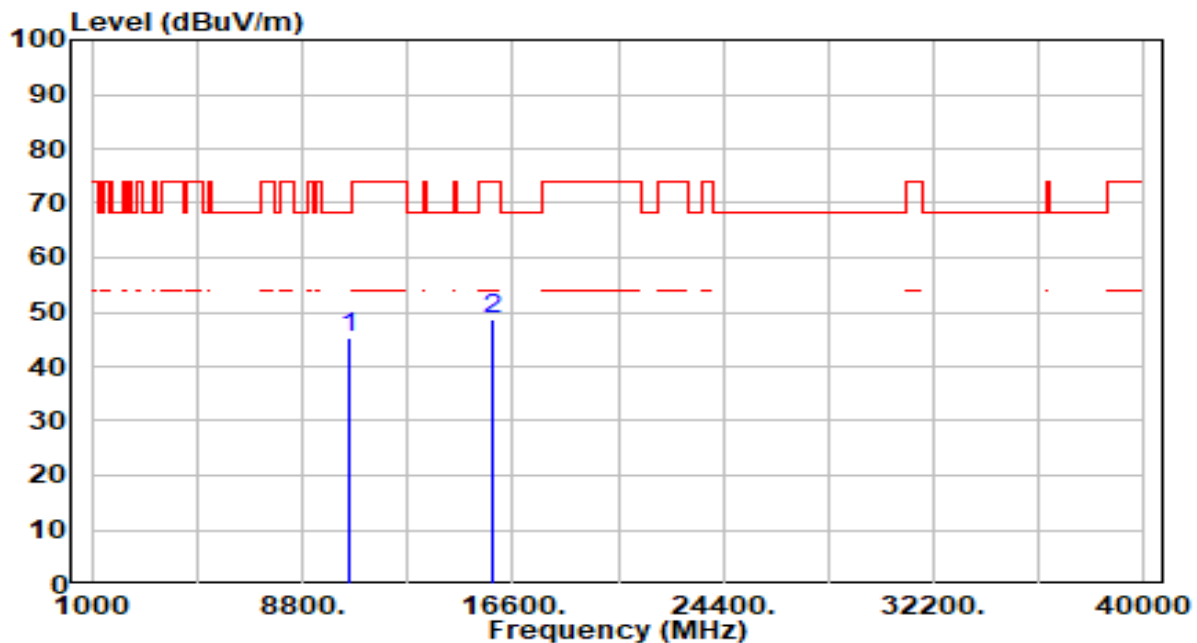


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10580.000	38.48	6.64	45.11	-23.09	68.20	100	264	Peak
2		15870.000	39.71	9.12	48.84	-25.16	74.00	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	By Notebook PC

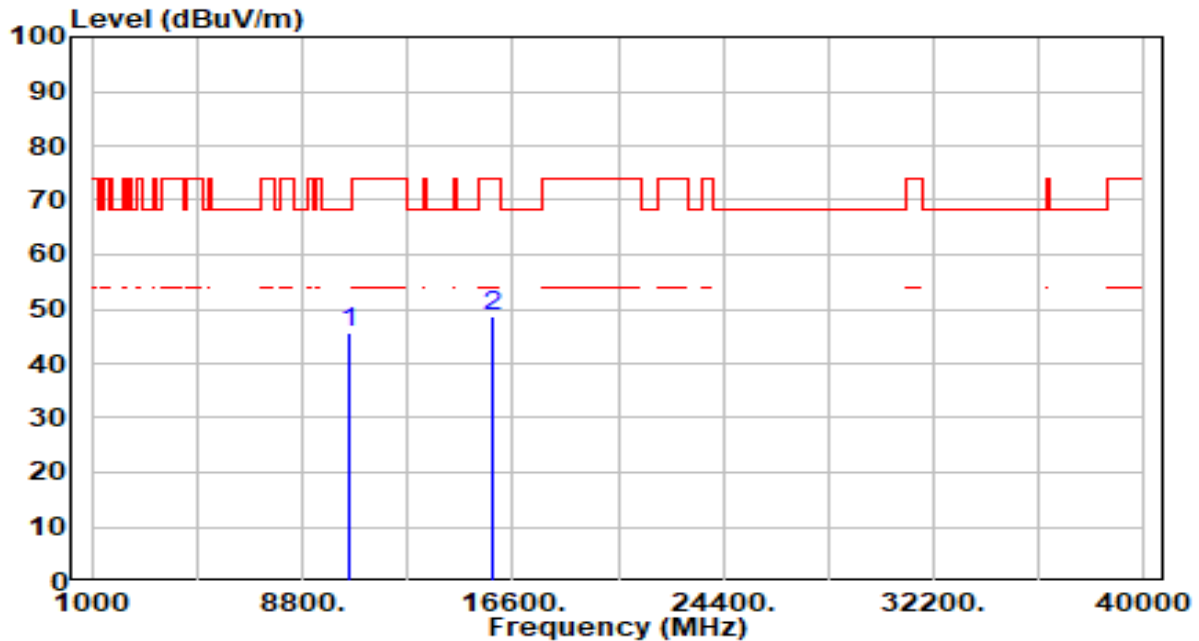


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10580.000	39.15	6.64	45.79	-22.41	68.20	100	360	Peak
2		15870.000	39.48	9.12	48.61	-25.39	74.00	100	103	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	By Notebook PC

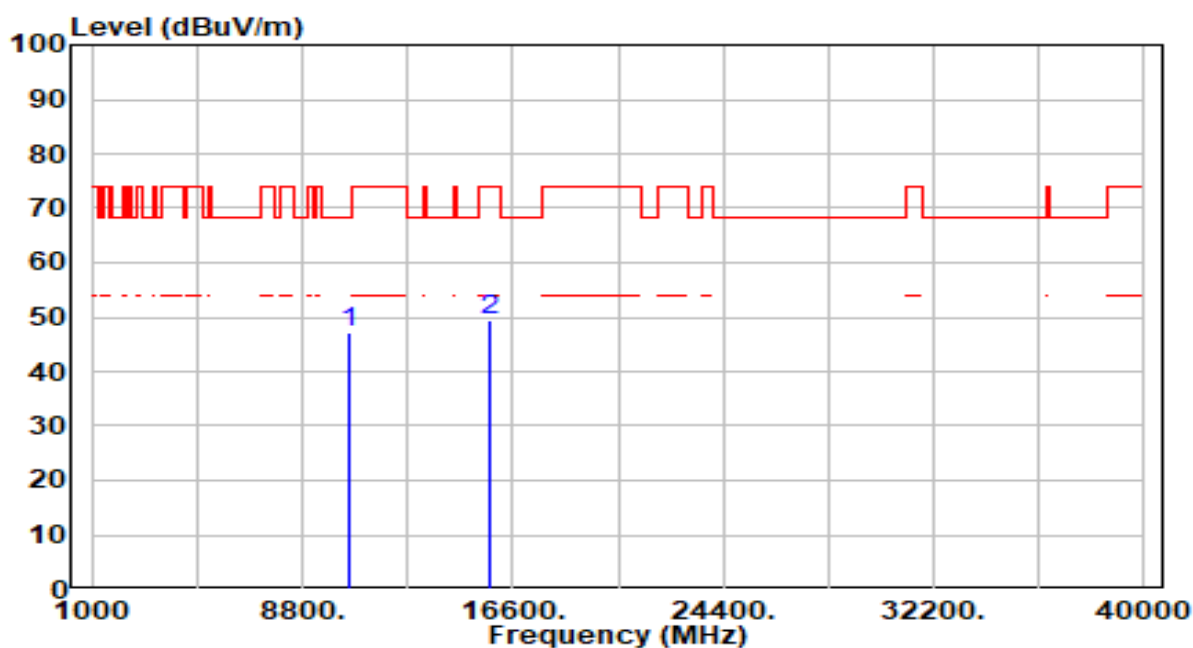


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10500.000	40.38	6.71	47.09	-21.11	68.20	100	164	Peak
2		15750.000	40.31	8.95	49.26	-24.74	74.00	100	249	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	By Notebook PC

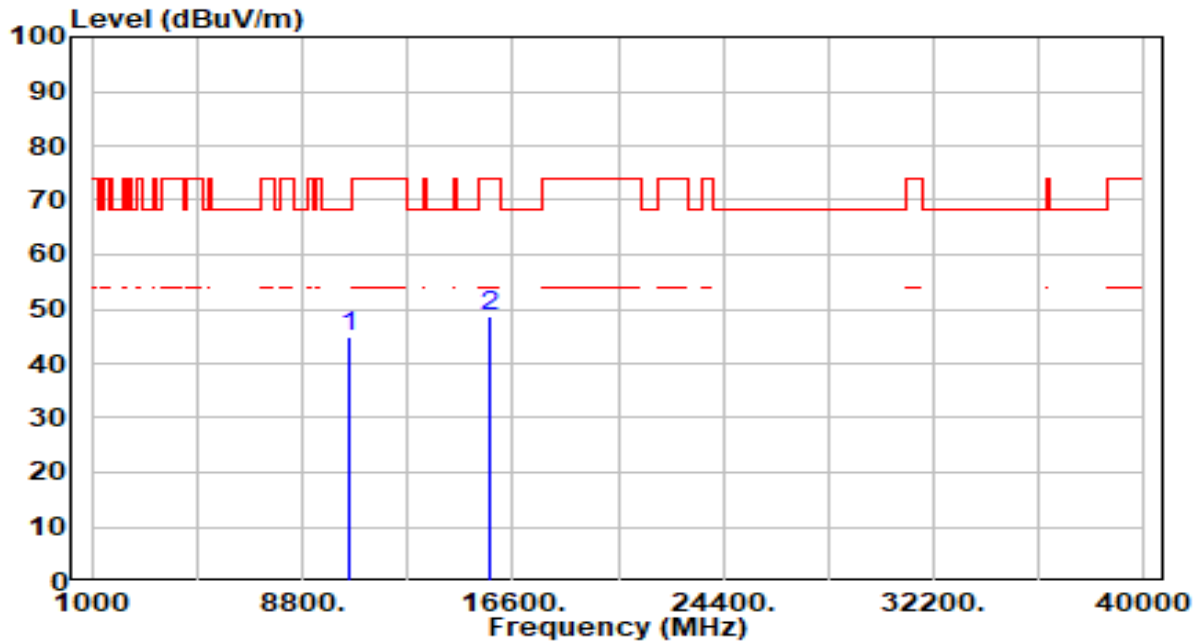

No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10500.000	38.37	6.71	45.09	-23.11	68.20	100	315	Peak
2		15750.000	39.89	8.95	48.84	-25.16	74.00	100	206	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.9. Radiated Restricted Band Edge Measurement

7.9.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42-16.423	399.9 - 410	4.5-5.15
¹ 0.495 - 0.505	16.69475-16.69525	608 - 614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960 - 1240	7.25-7.75
4.125-4.128	25.5 -25.67	1300 - 1427	8.025 - 8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660 - 1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123 - 138	2200 - 2300	14.47-14.5
8.291-8.294	149.9-150.05	2310 - 2390	15.35-16.2
8.362-8.366	156.52475-156.525	2483.5 - 2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690 - 2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260 - 3267	23.6-24.0
12.29-12.293	167.72-173.2	3332 - 3339	31.2-31.8
12.51975-12.52025	240 - 285	3345.8 - 3358	36.43-36.5
12.57675-12.57725	322-335.4	3600 - 4400	(²)
13.36-13.41	--	--	--

For 15.407(b) requirement:

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge

increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Refer to KDB 789033 D02v02r01 G)2)c), as specified in § 15.407(b), emissions above 1000 MHz that are outside of the restricted bands are subject to a maximum emission limit of -27 dBm/MHz (or -17 dBm/MHz as specified in § 15.407(b)(4)). However, an out-of-band emission that complies with both the peak and average limits of § 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz maximum emission limit.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.9.2. Test Procedure Used

KDB 789033 D02v02r01- Section G

7.9.3. Test Setting

Peak Measurements above 1GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold

7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW If the EUT is configured to transmit with duty cycle $\geq 98\%$, set $VBW \leq RBW/100$ (i.e., 10 kHz) but not less than 10 Hz. If the EUT duty cycle is $< 98\%$, set $VBW \geq 1/T$.
4. Detector = Peak
5. Sweep time = auto
6. Allow max hold to run for at least 50 traces if the transmitted signal is continuous or has at least 98% duty cycle. For lower duty cycles, increase the minimum number of traces by a factor of $1/x$, where x is the duty cycle.

7.9.4. Test Setup

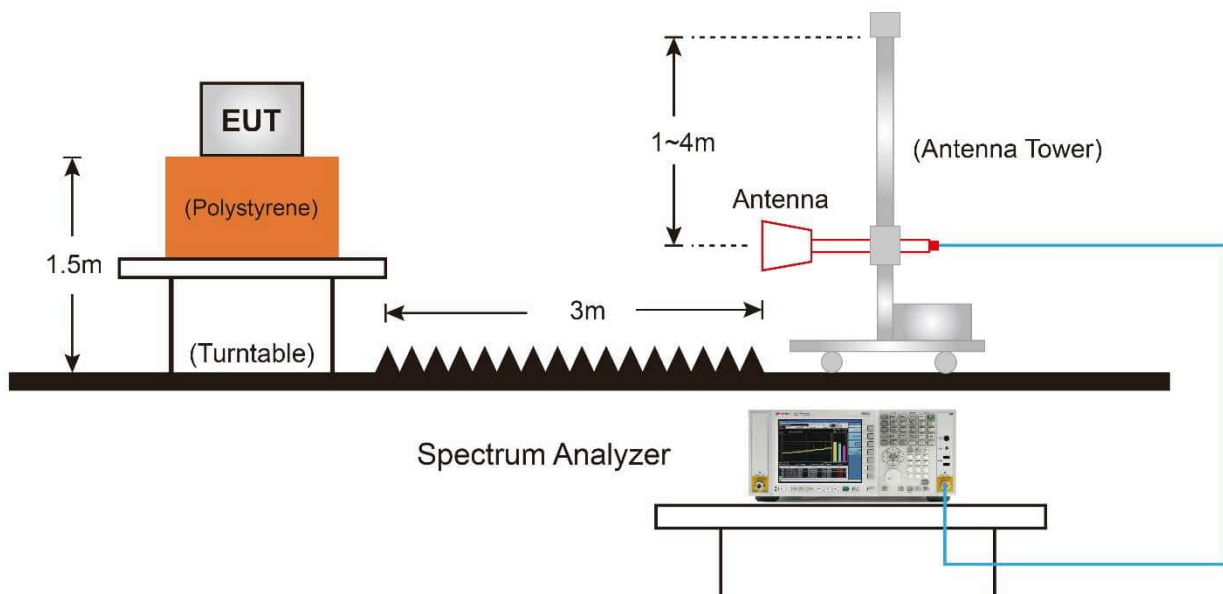

7.9.5. Test Result

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11a_TX_Band1_CH 36_ANT 6+7	Test Voltage	By Notebook PC

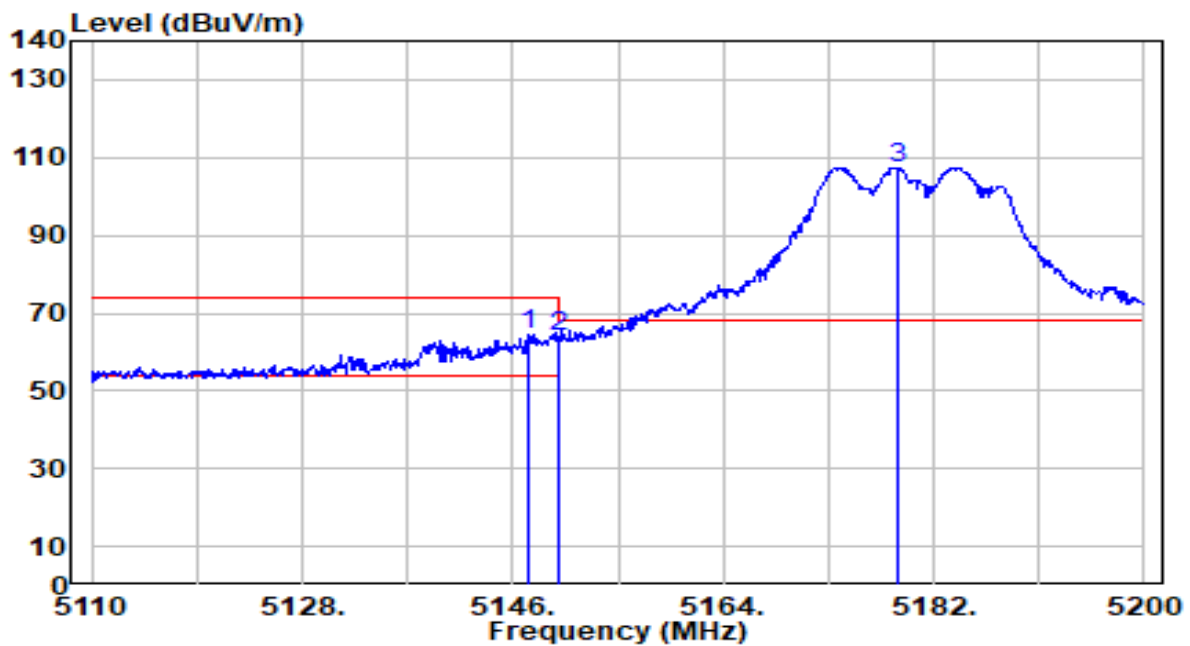


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.440	62.69	1.93	64.63	-9.37	74.00	241	350	Peak
2		5150.000	61.91	1.94	63.84	-10.16	74.00	241	350	Peak
3		5178.940	105.51	1.95	107.46	N/A	N/A	241	350	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11a_TX_Band1_CH 36_ANT 6+7	Test Voltage	By Notebook PC

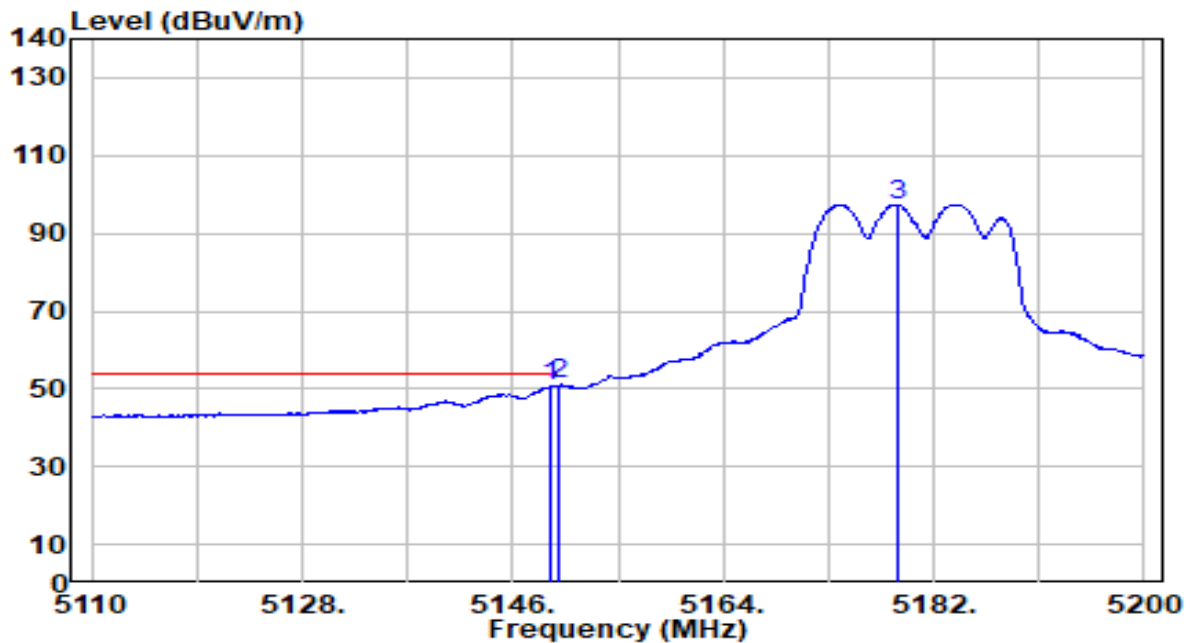


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5149.330	48.83	1.94	50.77	-3.23	54.00	241	350	Average
2	*	5150.000	49.16	1.94	51.09	-2.91	54.00	241	350	Average
3		5178.850	95.47	1.95	97.42	N/A	N/A	241	350	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11a_TX_Band1_CH 36_ANT 6+7	Test Voltage	By Notebook PC

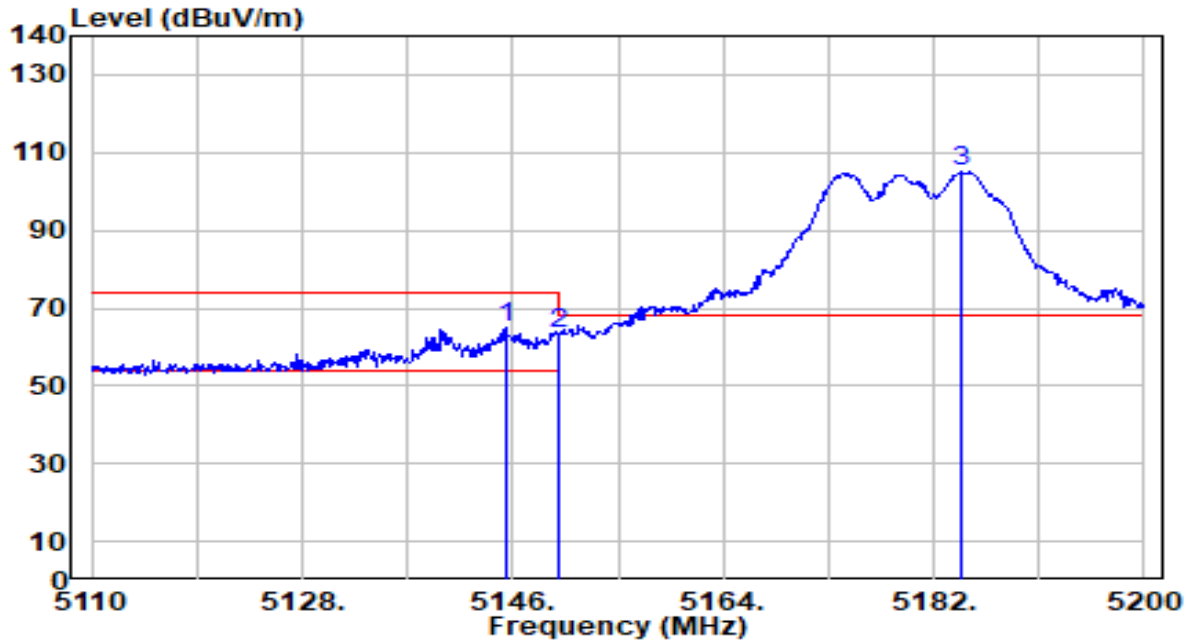


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5145.370	62.93	1.93	64.86	-9.14	74.00	149	278	Peak
2		5150.000	61.68	1.94	63.62	-10.38	74.00	149	278	Peak
3		5184.430	103.31	1.96	105.27	N/A	N/A	149	278	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11a_TX_Band1_CH 36_ANT 6+7	Test Voltage	By Notebook PC

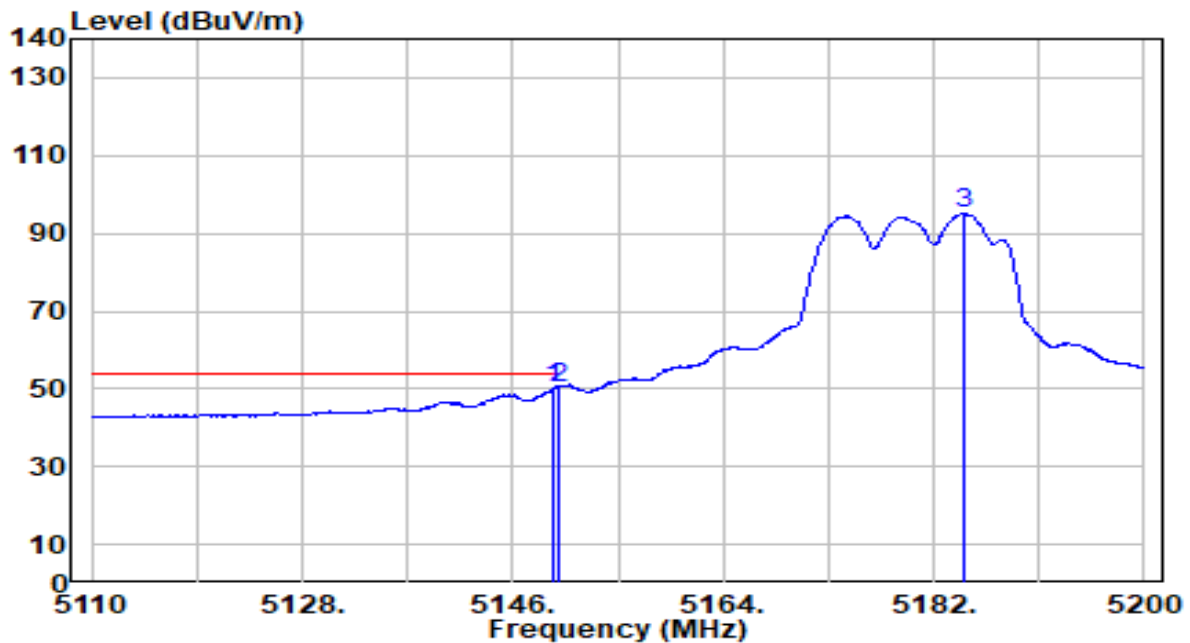


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5149.420	48.03	1.94	49.97	-4.03	54.00	149	278	Average
2	*	5150.000	48.50	1.94	50.43	-3.57	54.00	149	278	Average
3		5184.520	93.14	1.96	95.10	N/A	N/A	149	278	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11a_TX_Band2_CH 64_ANT 6+7	Test Voltage	By Notebook PC

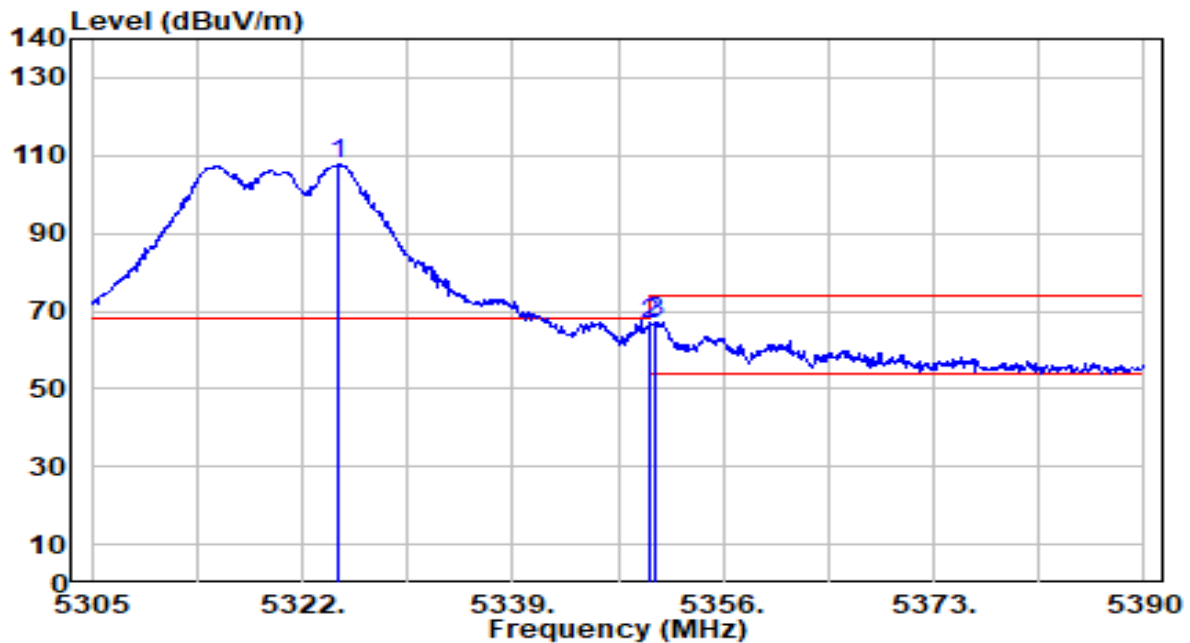


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5324.805	105.79	1.91	107.70	N/A	N/A	191	71	Peak
2	5350.000	64.92	1.90	66.82	-7.18	74.00	191	71	Peak
3	* 5350.560	65.19	1.90	67.09	-6.91	74.00	191	71	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11a_TX_Band2_CH 64_ANT 6+7	Test Voltage	By Notebook PC

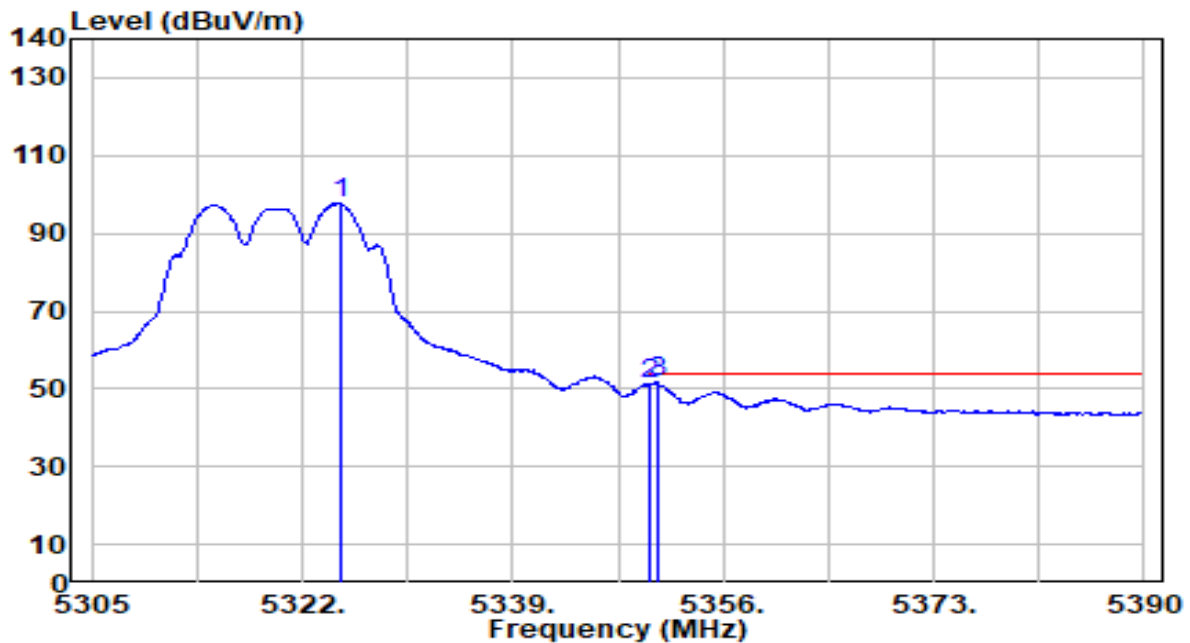


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5325.060	95.62	1.91	97.53	N/A	N/A	191	71	Average
2	5350.000	49.28	1.90	51.18	-2.82	54.00	191	71	Average
3	* 5350.645	49.68	1.90	51.58	-2.42	54.00	191	71	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11a_TX_Band2_CH 64_ANT 6+7	Test Voltage	By Notebook PC

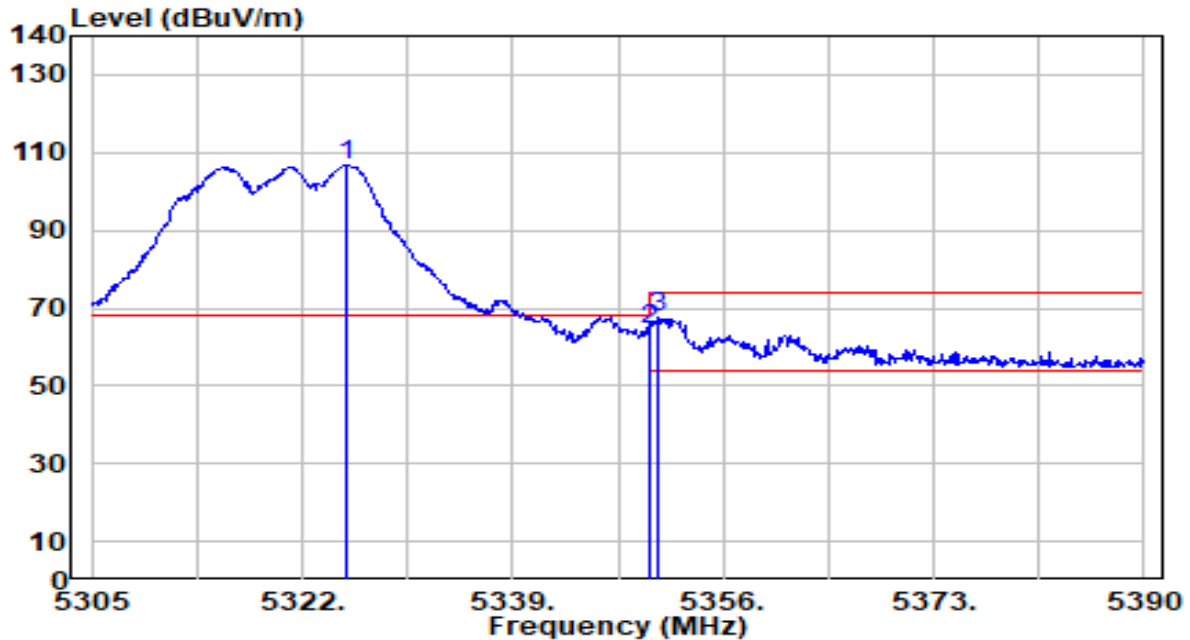


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5325.570	104.70	1.91	106.61	N/A	N/A	272	69	Peak
2	5350.000	62.70	1.90	64.60	-9.40	74.00	272	69	Peak
3	* 5350.730	65.47	1.90	67.38	-6.62	74.00	272	69	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11a_TX_Band2_CH 64_ANT 6+7	Test Voltage	By Notebook PC

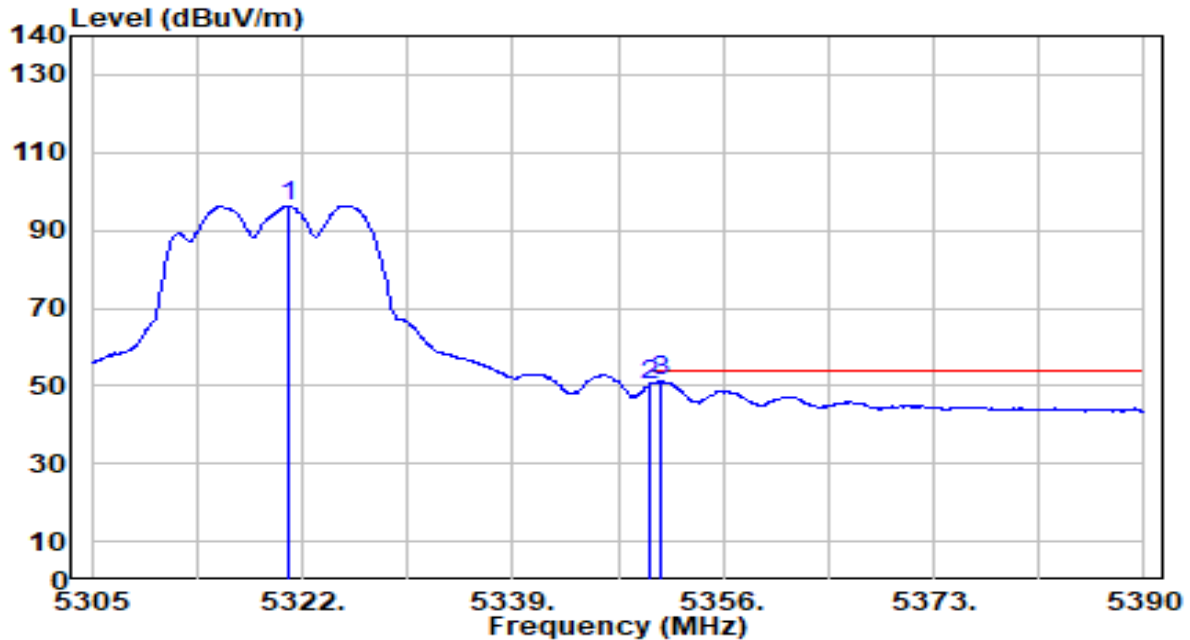


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5320.895	94.45	1.91	96.36	N/A	N/A	272	69	Average
2	5350.000	48.13	1.90	50.03	-3.97	54.00	272	69	Average
3	* 5350.985	49.20	1.90	51.11	-2.89	54.00	272	69	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11a_TX_Band3_CH 100_ANT 6+7	Test Voltage	By Notebook PC

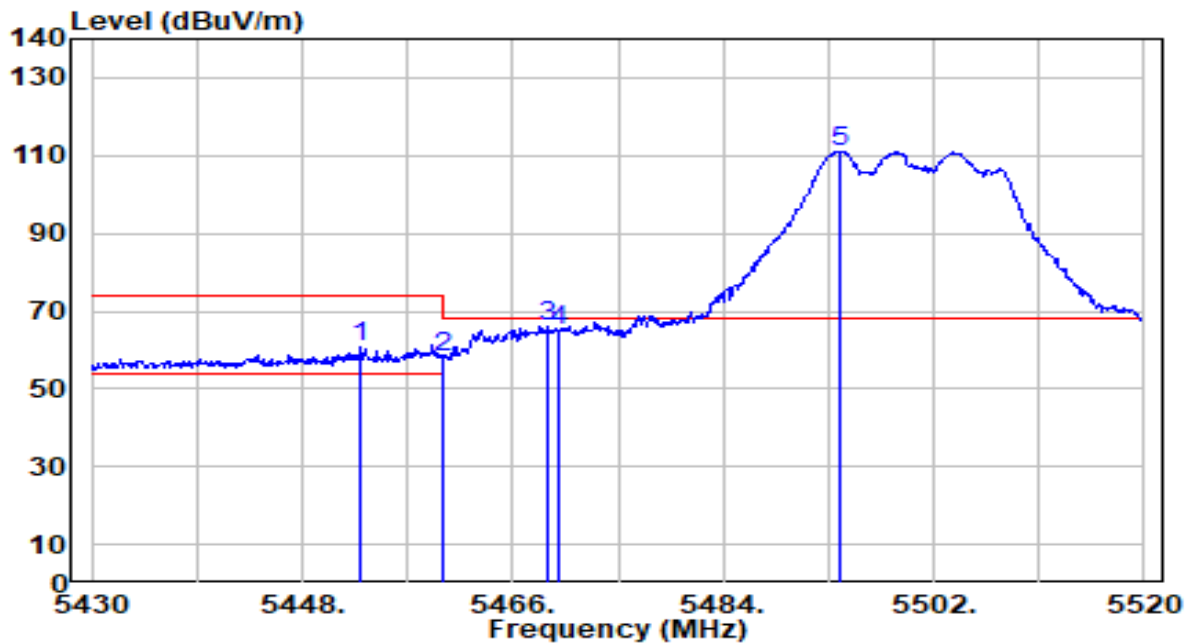


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5453.040	58.54	2.05	60.59	-13.41	74.00	234	346	Peak
2	5460.000	56.22	2.07	58.29	-15.71	74.00	234	346	Peak
3	* 5468.970	63.74	2.10	65.85	-2.35	68.20	234	346	Peak
4	5470.000	62.91	2.11	65.01	-3.19	68.20	234	346	Peak
5	5493.900	108.93	2.18	111.11	N/A	N/A	234	346	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11a_TX_Band3_CH 100_ANT 6+7	Test Voltage	By Notebook PC

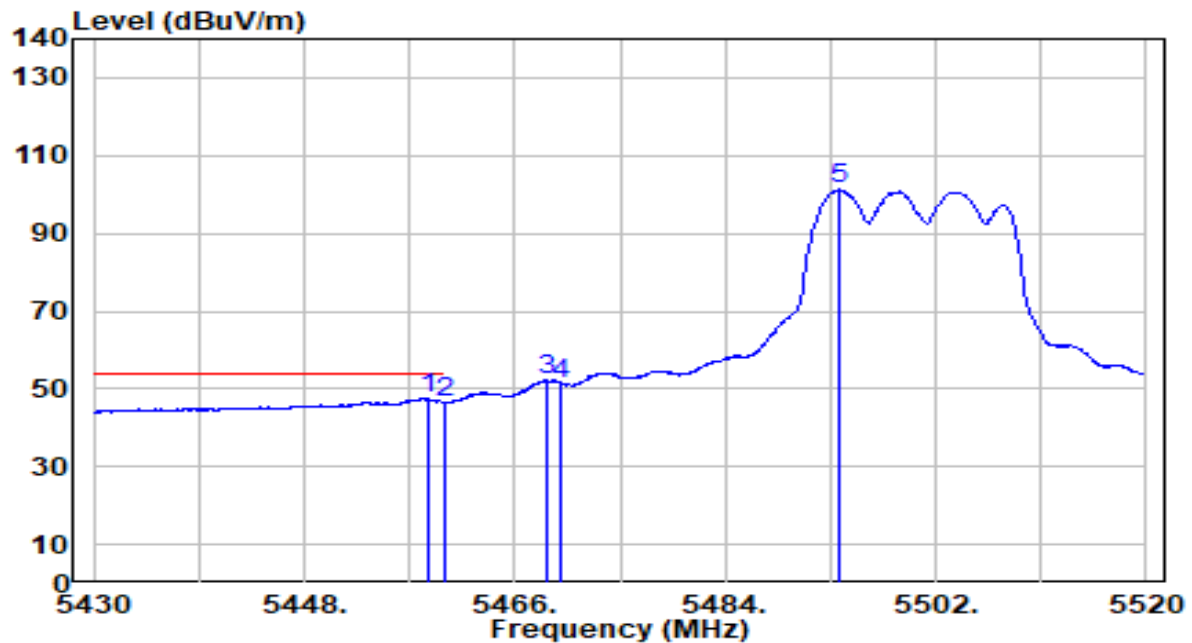


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5458.530	45.60	2.07	47.67	-6.33	54.00	234	346	Average
2		5460.000	44.54	2.07	46.61	-7.39	54.00	234	346	Average
3		5468.700	50.42	2.10	52.52	N/A	N/A	234	346	Average
4		5470.000	49.34	2.11	51.44	N/A	N/A	234	346	Average
5		5493.810	99.11	2.18	101.29	N/A	N/A	234	346	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11a_TX_Band3_CH 100_ANT 6+7	Test Voltage	By Notebook PC

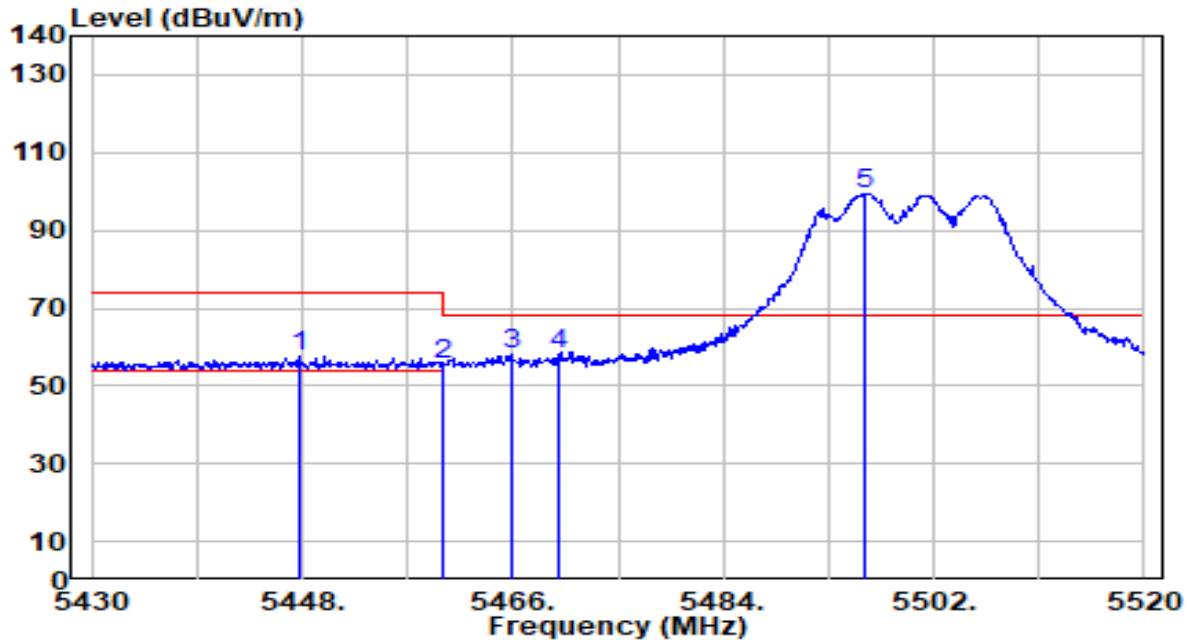


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5447.730	55.72	2.04	57.76	-16.24	74.00	266	346	Peak
2	5460.000	53.39	2.07	55.46	-18.54	74.00	266	346	Peak
3	* 5465.820	55.90	2.09	58.00	-10.20	68.20	266	346	Peak
4	5470.000	55.86	2.11	57.97	-10.23	68.20	266	346	Peak
5	5496.150	97.31	2.19	99.49	N/A	N/A	266	346	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11a_TX_Band3_CH 100_ANT 6+7	Test Voltage	By Notebook PC

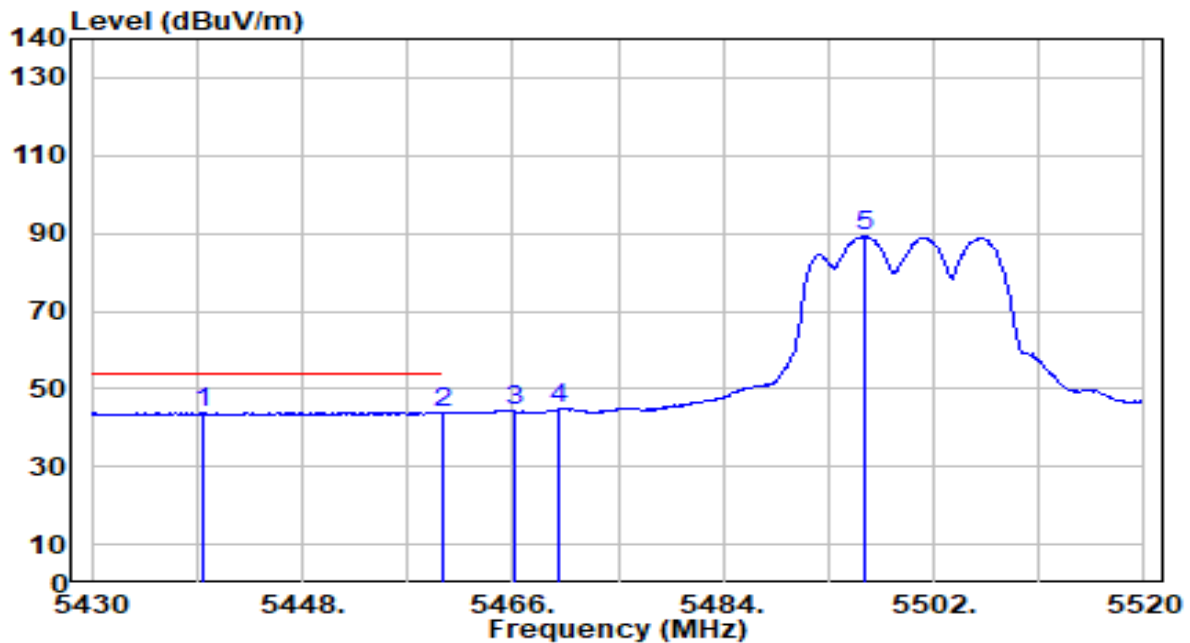


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5439.450	41.86	2.01	43.87	-10.13	54.00	266	346	Average
2	* 5460.000	41.84	2.07	43.92	-10.08	54.00	266	346	Average
3	5466.090	42.36	2.09	44.45	N/A	N/A	266	346	Average
4	5470.000	42.58	2.11	44.68	N/A	N/A	266	346	Average
5	5496.060	87.04	2.19	89.22	N/A	N/A	266	346	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11a_TX_Band3_CH 140_ANT 6+7	Test Voltage	By Notebook PC

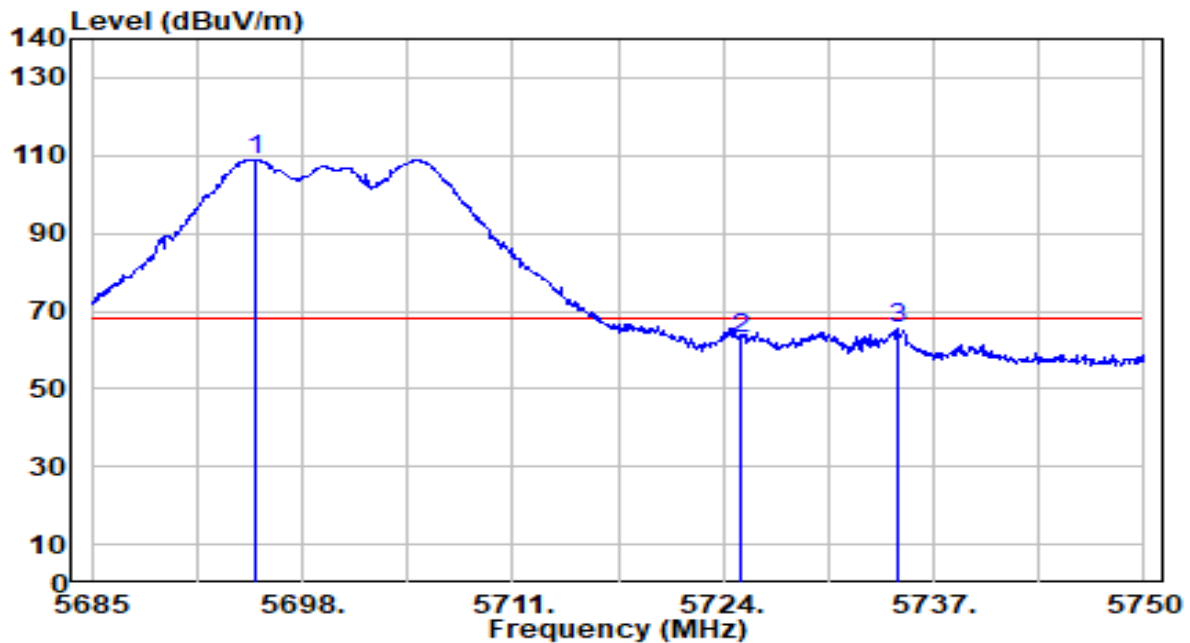


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5695.140	105.89	3.09	108.99	N/A	N/A	236	24	Peak
2	5725.000	59.83	3.25	63.09	-5.11	68.20	236	24	Peak
3	* 5734.725	62.05	3.31	65.36	-2.84	68.20	236	24	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11a_TX_Band3_CH 140_ANT 6+7	Test Voltage	By Notebook PC

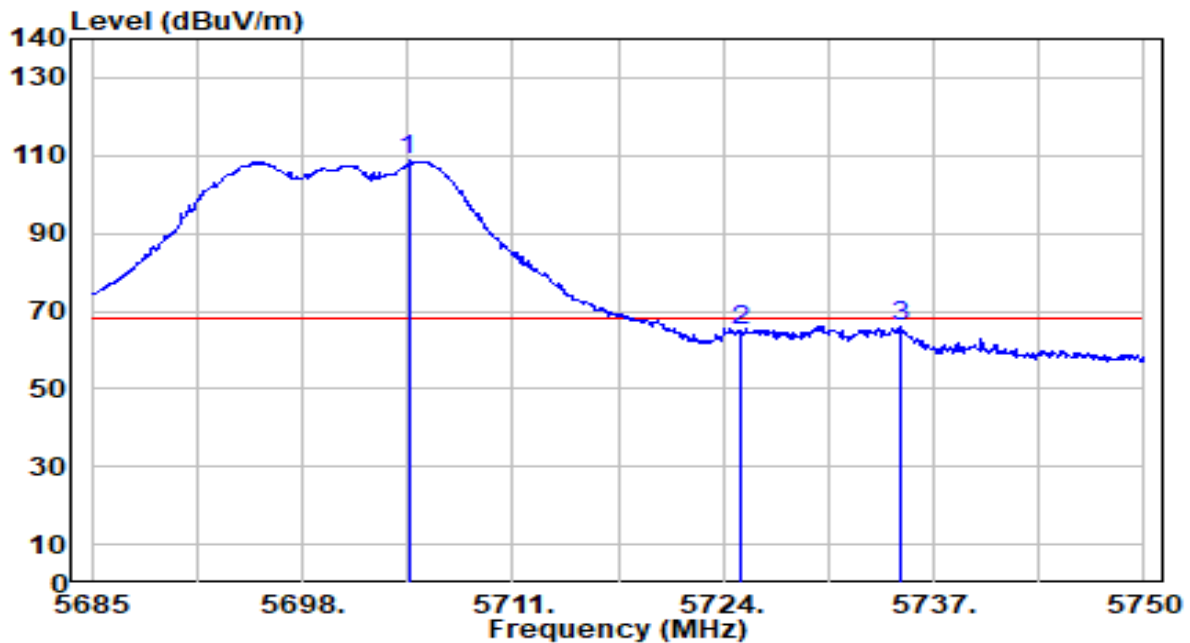


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5704.565	105.61	3.14	108.75	N/A	N/A	228	60	Peak
2	5725.000	61.58	3.25	64.84	-3.36	68.20	228	60	Peak
3	* 5734.985	62.53	3.31	65.83	-2.37	68.20	228	60	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-06-25
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band4_CH 149_ANT 6+7	Test Voltage	By Notebook PC

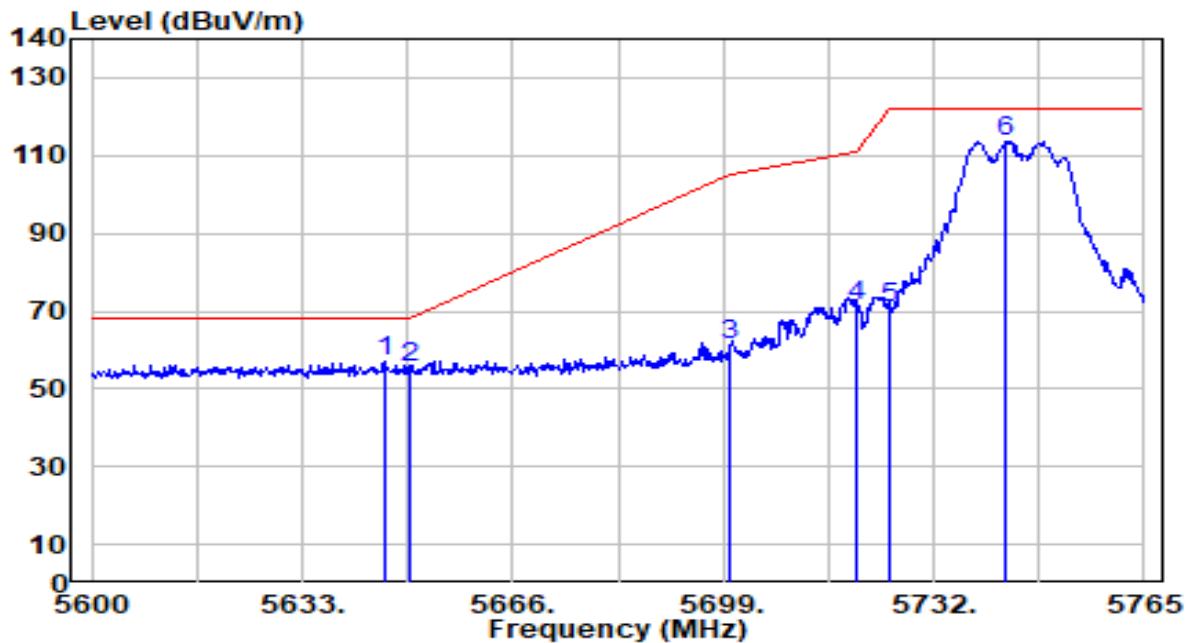


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5645.870	54.06	2.83	56.90	-11.30	68.20	200	0	Peak
2		5650.000	52.78	2.86	55.63	-12.57	68.20	200	0	Peak
3		5700.000	58.06	3.12	61.18	-44.02	105.20	200	0	Peak
4		5720.000	67.85	3.23	71.08	-39.72	110.80	200	0	Peak
5		5725.000	67.78	3.25	71.03	-51.17	122.20	200	0	Peak
6		5743.220	110.23	3.35	113.59	N/A	N/A	200	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-06-25
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band4_CH 149_ANT 6+7	Test Voltage	By Notebook PC

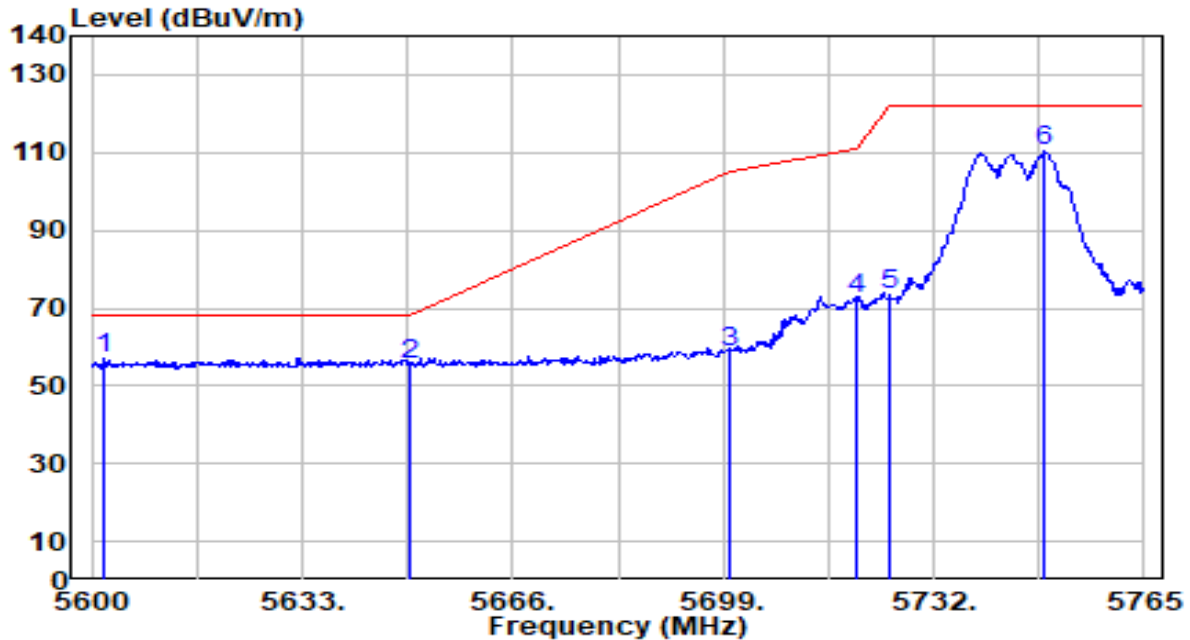


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5601.815	54.69	2.60	57.30	-10.90	68.20	200	63	Peak
2		5650.000	52.48	2.86	55.34	-12.86	68.20	200	63	Peak
3		5700.000	55.60	3.12	58.71	-46.49	105.20	200	63	Peak
4		5720.000	69.30	3.23	72.53	-38.27	110.80	200	63	Peak
5		5725.000	70.13	3.25	73.38	-48.82	122.20	200	63	Peak
6		5749.490	106.96	3.39	110.35	N/A	N/A	200	63	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-06-25
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band4_CH 165_ANT 6+7	Test Voltage	By Notebook PC

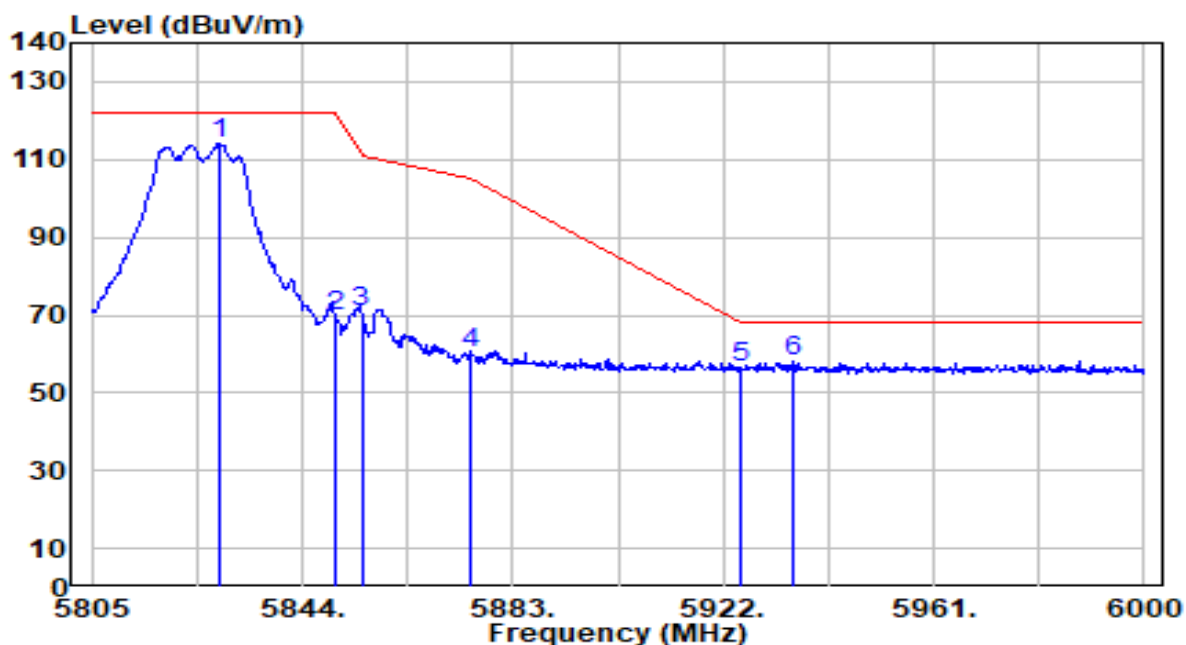


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5828.595	110.41	3.64	114.06	N/A	N/A	178	360	Peak
2	5850.000	66.18	3.63	69.80	-52.40	122.20	178	360	Peak
3	5855.000	67.05	3.63	70.67	-40.13	110.80	178	360	Peak
4	5875.000	56.69	3.61	60.31	-44.89	105.20	178	360	Peak
5	5925.000	52.90	3.59	56.50	-11.70	68.20	178	360	Peak
6	* 5934.870	54.64	3.59	58.23	-9.97	68.20	178	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-06-25
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band4_CH 165_ANT 6+7	Test Voltage	By Notebook PC

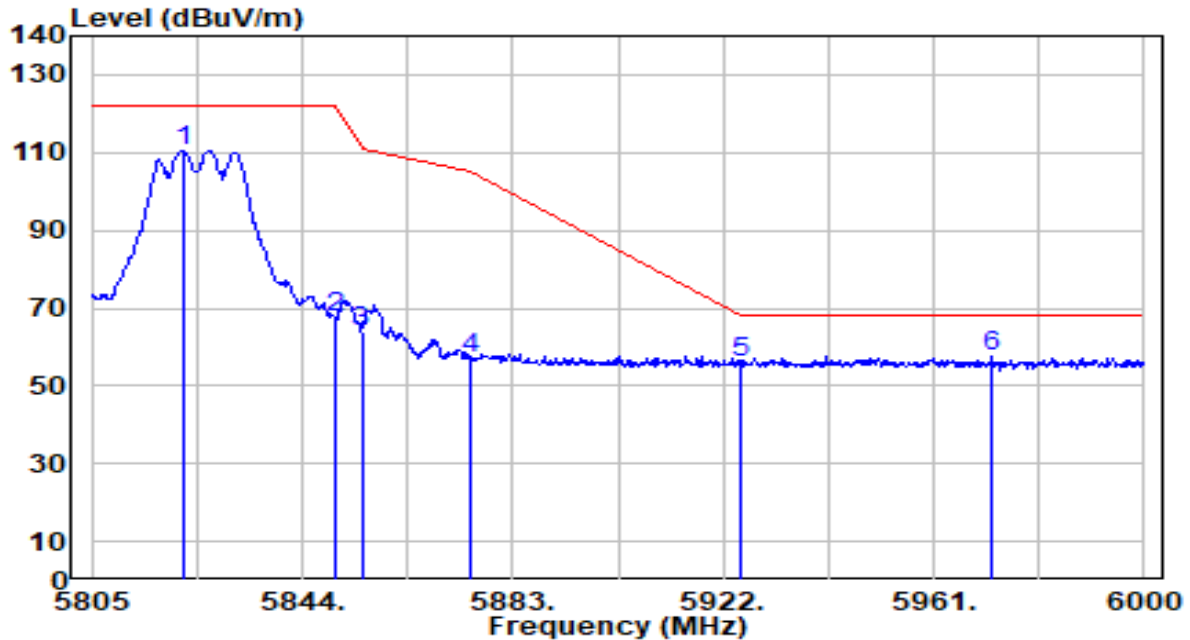


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5821.965	106.86	3.65	110.51	N/A	N/A	304	89	Peak
2	5850.000	64.15	3.63	67.78	-54.42	122.20	304	89	Peak
3	5855.000	60.46	3.63	64.08	-46.72	110.80	304	89	Peak
4	5875.000	53.43	3.61	57.05	-48.15	105.20	304	89	Peak
5	5925.000	52.30	3.59	55.89	-12.31	68.20	304	89	Peak
6	* 5971.920	54.05	3.58	57.64	-10.56	68.20	304	89	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 6+7	Test Voltage	By Notebook PC

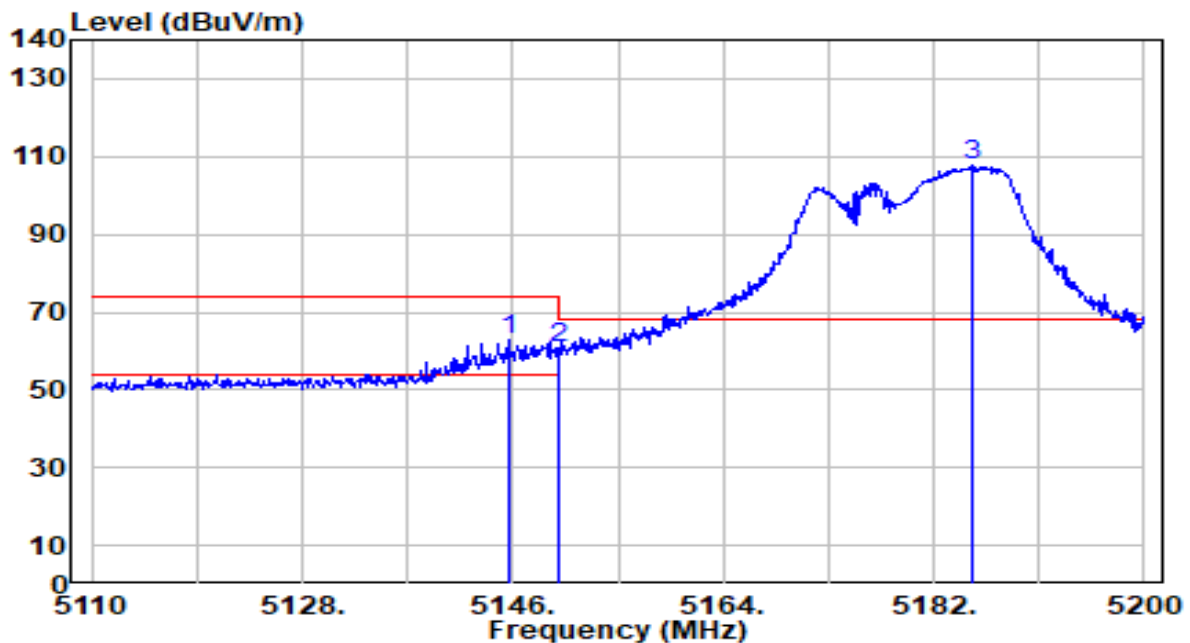


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5145.640	61.02	1.93	62.95	-11.05	74.00	202	245	Peak
2		5150.000	59.02	1.94	60.96	-13.04	74.00	202	245	Peak
3		5185.240	105.58	1.96	107.54	N/A	N/A	202	245	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 6+7	Test Voltage	By Notebook PC

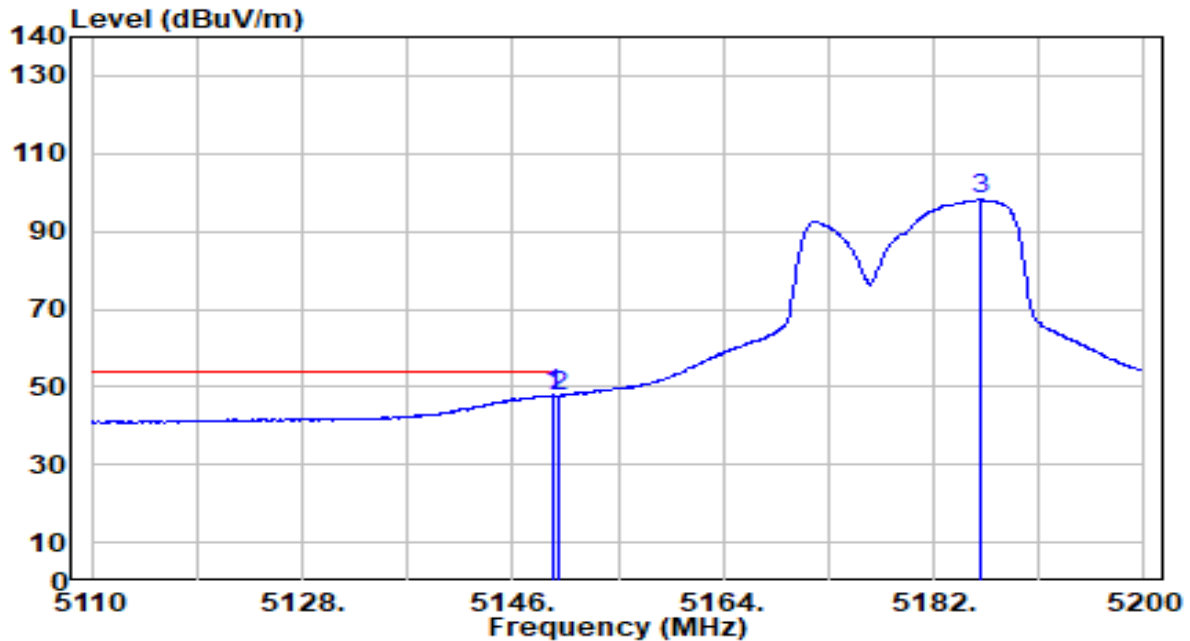


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.420	45.88	1.94	47.82	-6.18	54.00	202	245	Average
2		5150.000	45.81	1.94	47.74	-6.26	54.00	202	245	Average
3		5185.960	96.24	1.96	98.20	N/A	N/A	202	245	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 6+7	Test Voltage	By Notebook PC

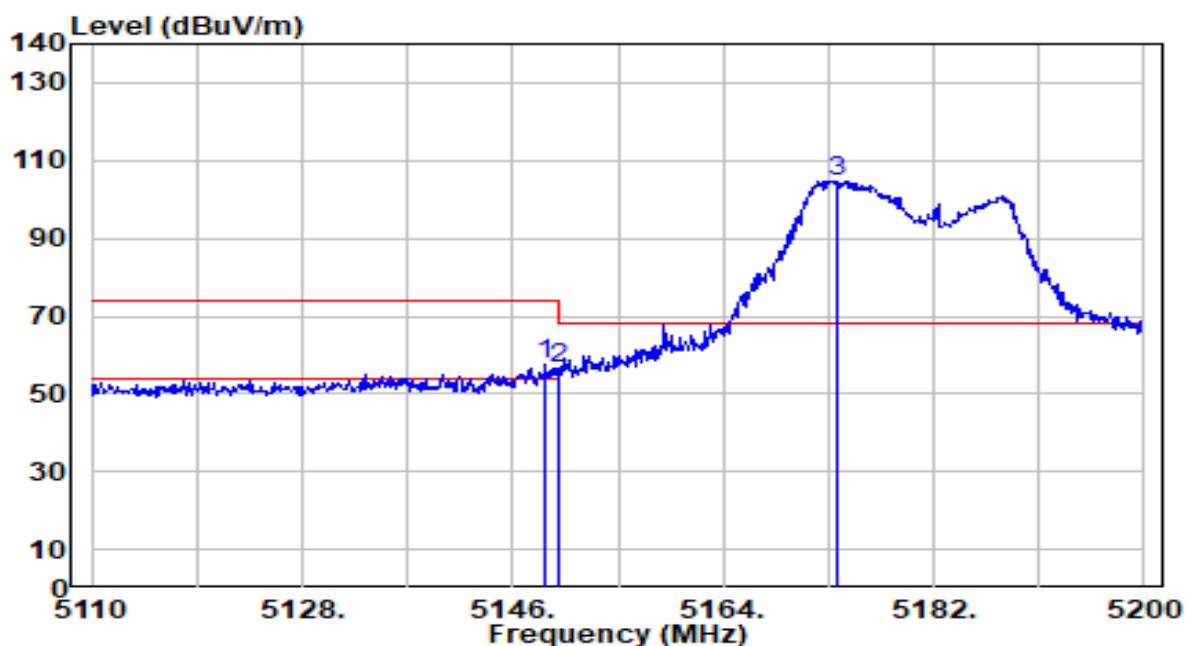


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.790	55.83	1.94	57.76	-16.24	74.00	100	321	Peak
2		5150.000	54.57	1.94	56.50	-17.50	74.00	100	321	Peak
3		5173.720	102.83	1.95	104.78	N/A	N/A	100	321	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 6+7	Test Voltage	By Notebook PC

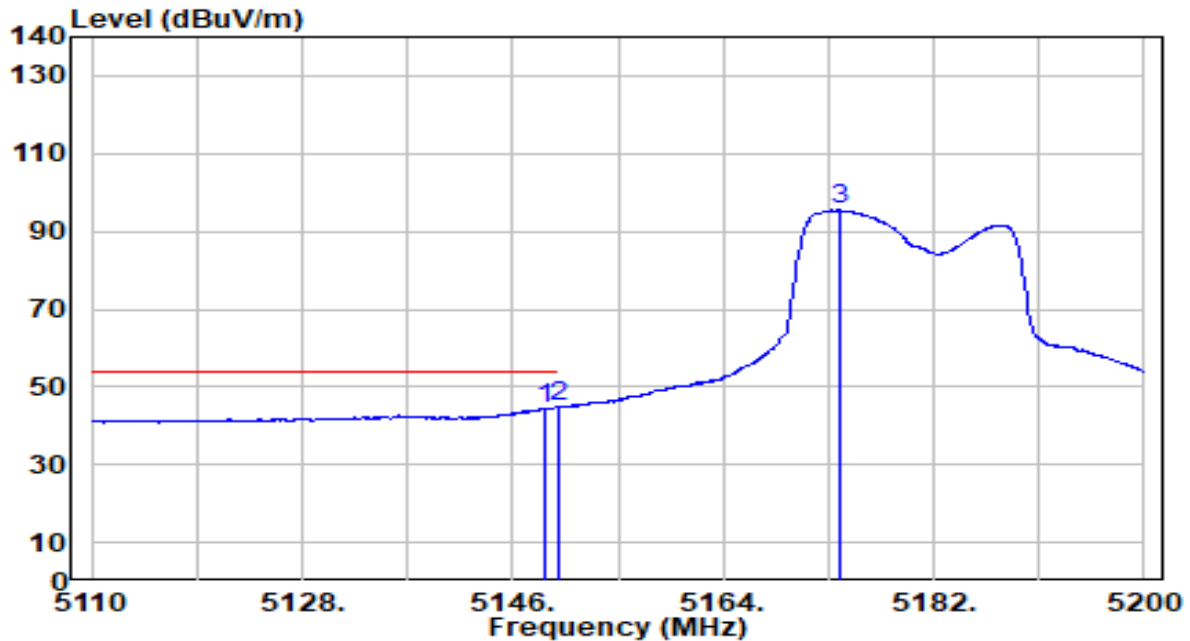


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5148.700	42.67	1.94	44.61	-9.39	54.00	100	321	Average
2	*	5150.000	42.82	1.94	44.75	-9.25	54.00	100	321	Average
3		5174.080	93.57	1.95	95.53	N/A	N/A	100	321	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 6+7	Test Voltage	By Notebook PC

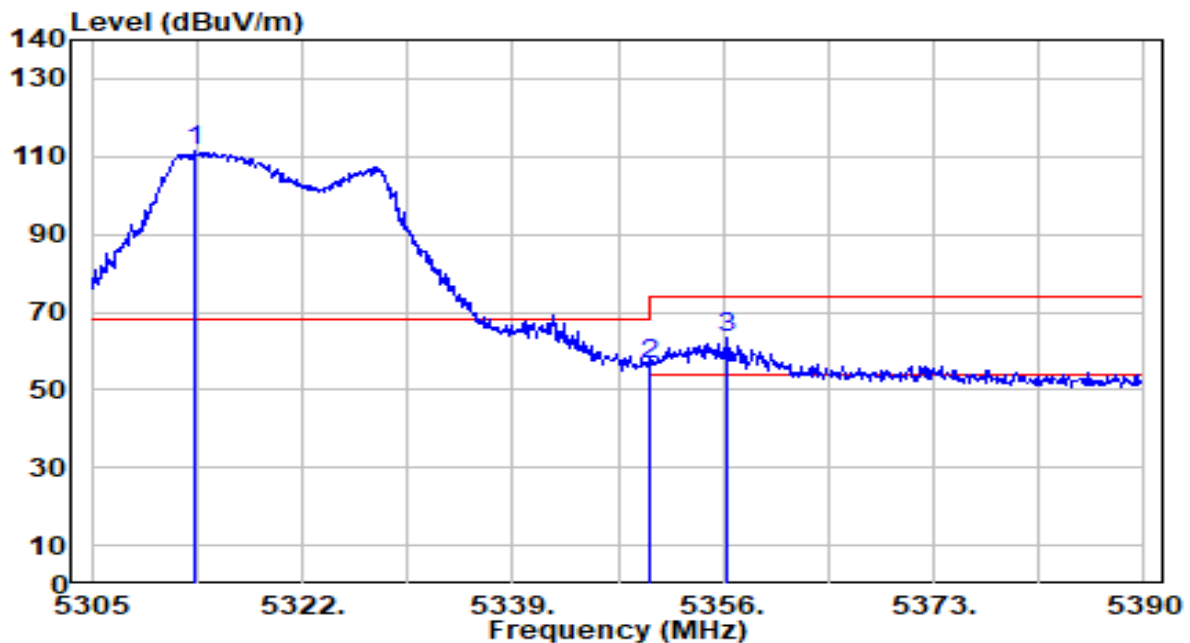


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5313.330	109.46	1.92	111.38	N/A	N/A	212	345	Peak
2	5350.000	54.59	1.90	56.49	-17.51	74.00	212	345	Peak
3	* 5356.255	61.31	1.90	63.21	-10.79	74.00	212	345	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 6+7	Test Voltage	By Notebook PC

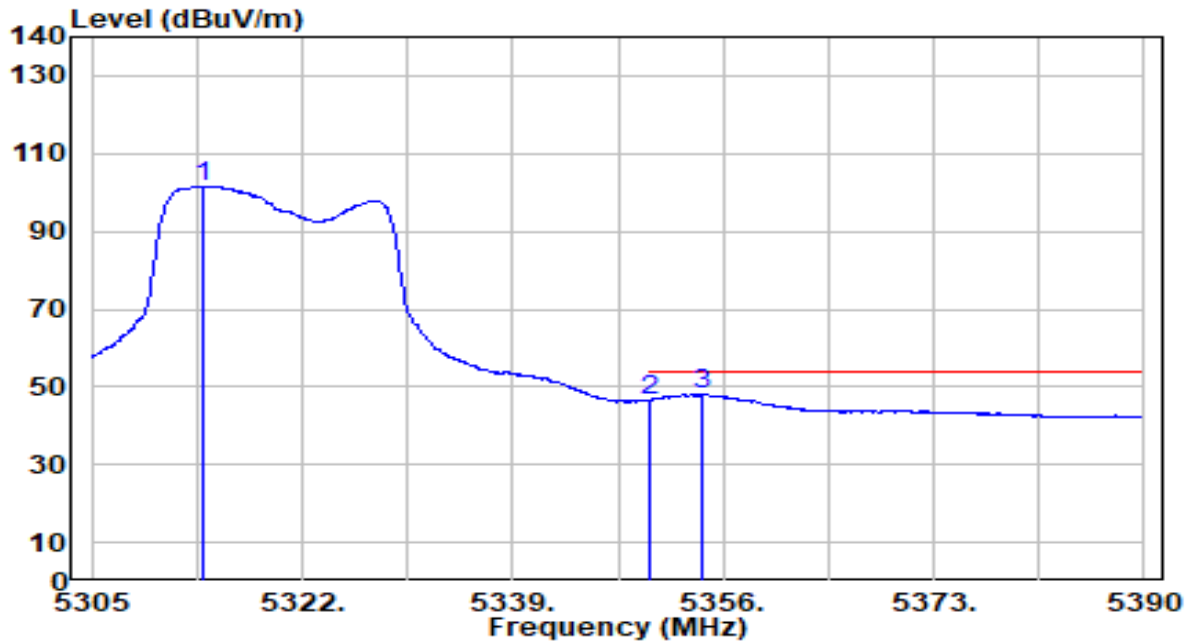


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5314.010	99.77	1.92	101.69	N/A	N/A	212	345	Average
2	5350.000	44.65	1.90	46.56	-7.44	54.00	212	345	Average
3	* 5354.385	46.29	1.90	48.19	-5.81	54.00	212	345	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 6+7	Test Voltage	By Notebook PC

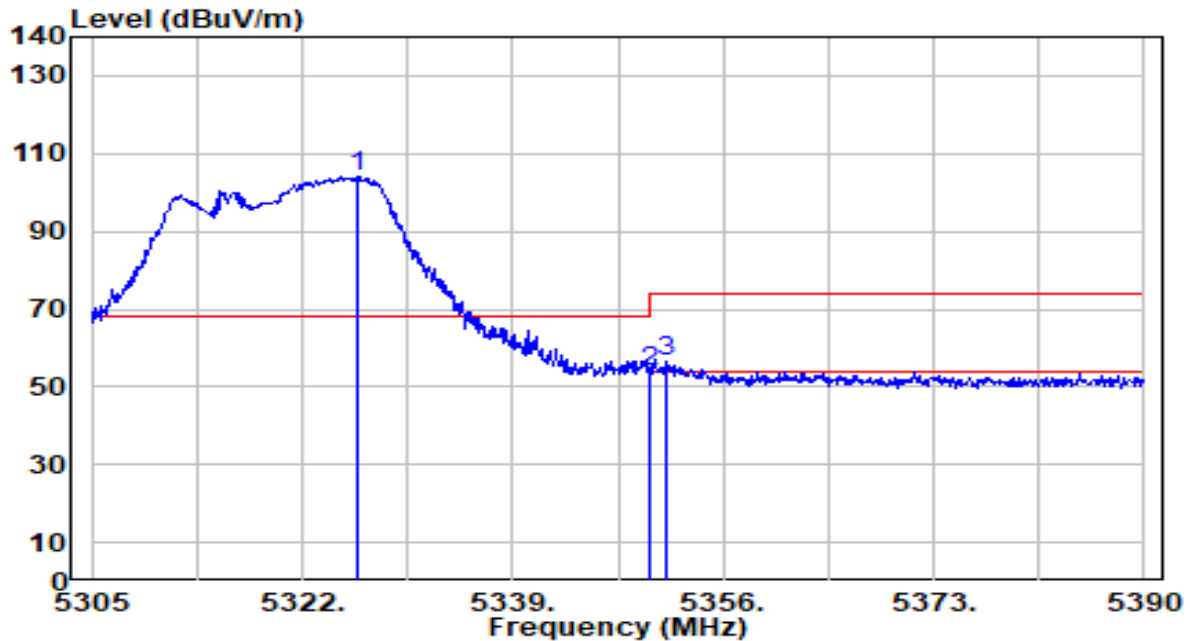


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5326.420	101.97	1.91	103.88	N/A	N/A	100	22	Peak
2	5350.000	52.19	1.90	54.09	-19.91	74.00	100	22	Peak
3	* 5351.410	54.49	1.90	56.40	-17.60	74.00	100	22	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 6+7	Test Voltage	By Notebook PC

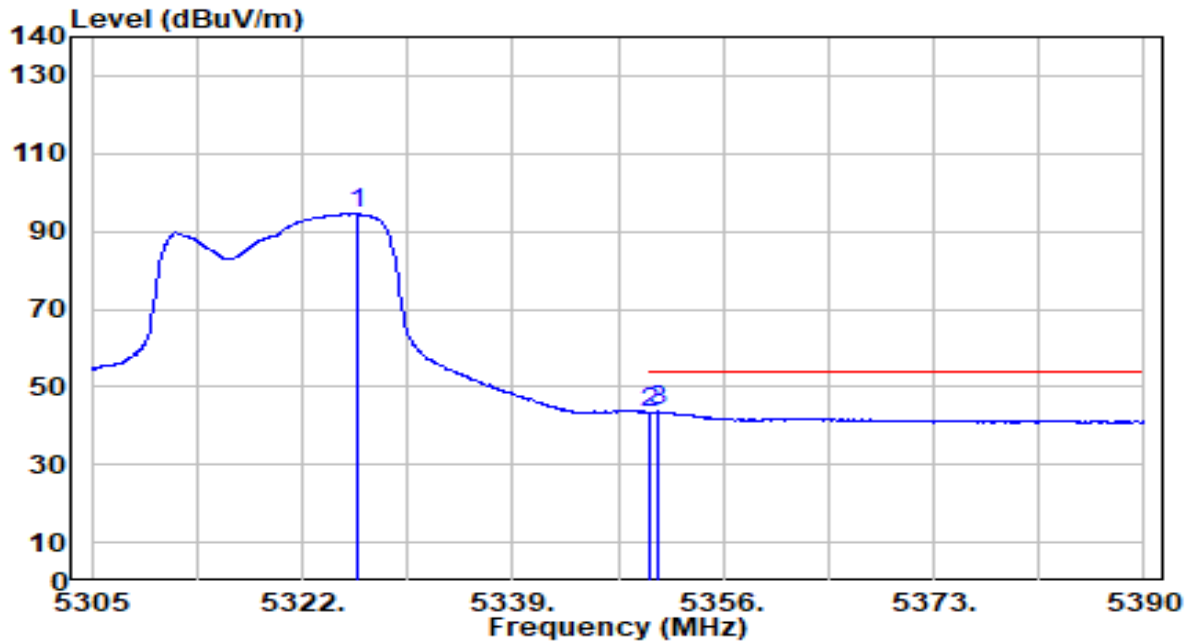


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5326.505	92.84	1.91	94.76	N/A	N/A	100	22	Average
2	5350.000	41.62	1.90	43.52	-10.48	54.00	100	22	Average
3	* 5350.645	41.72	1.90	43.62	-10.38	54.00	100	22	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ANT 6+7	Test Voltage	By Notebook PC

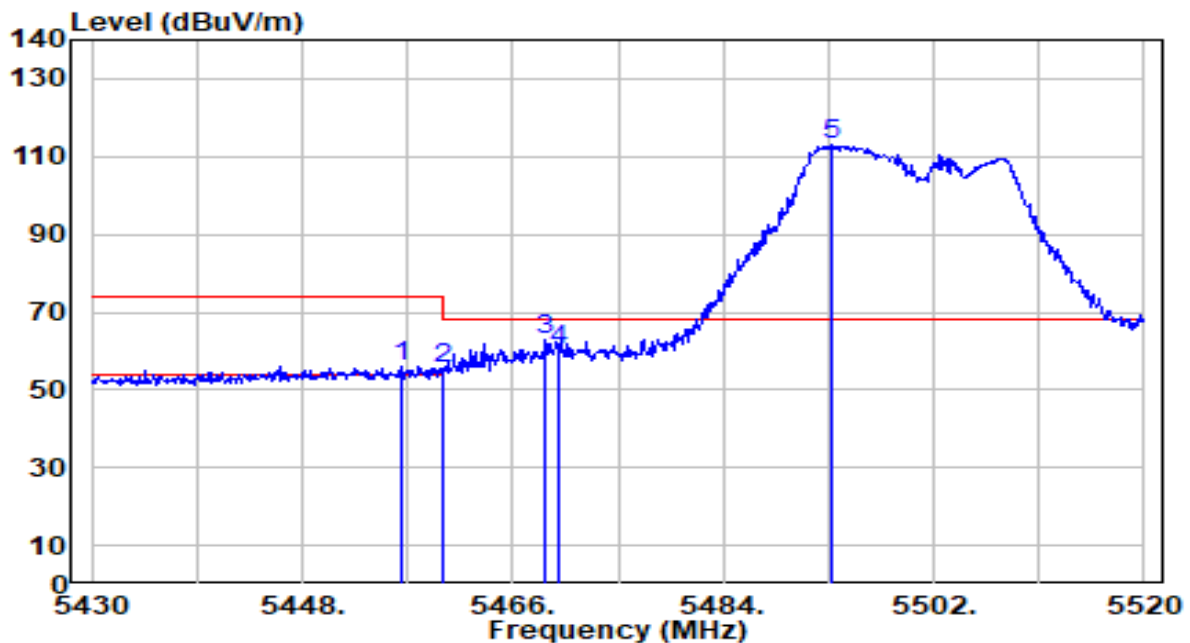


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5456.460	53.92	2.06	55.98	-18.02	74.00	198	343	Peak
2	5460.000	53.33	2.07	55.40	-18.60	74.00	198	343	Peak
3	* 5468.790	60.66	2.10	62.76	-5.44	68.20	198	343	Peak
4	5470.000	58.27	2.11	60.38	-7.82	68.20	198	343	Peak
5	5493.360	110.83	2.18	113.01	N/A	N/A	198	343	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ANT 6+7	Test Voltage	By Notebook PC

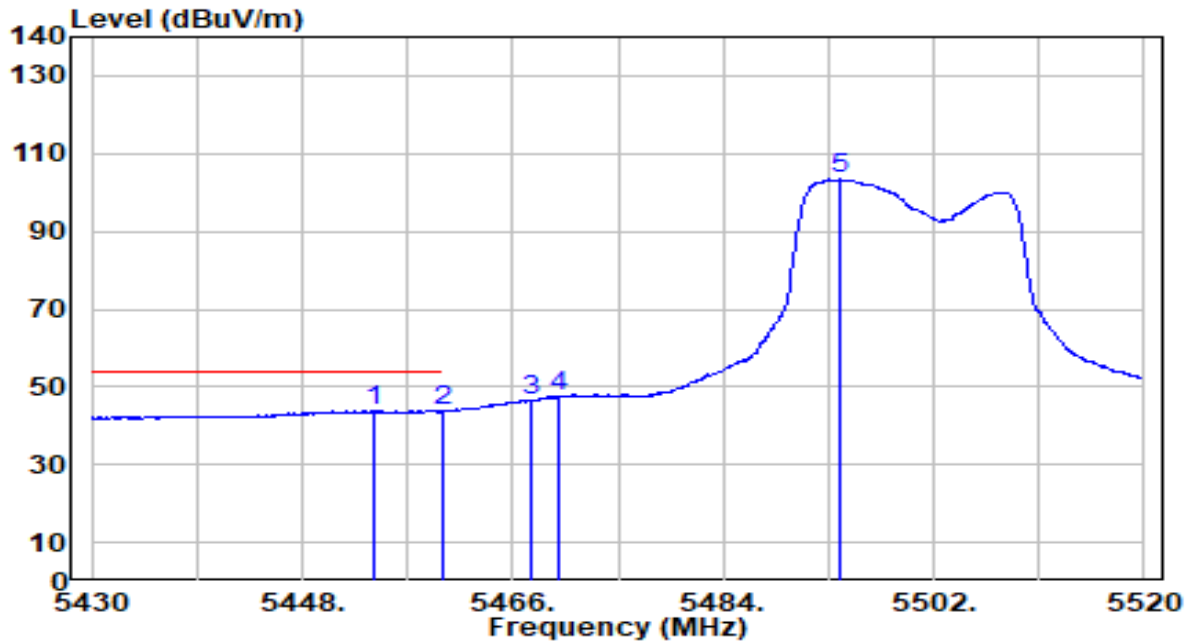


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5454.210	41.85	2.06	43.91	-10.09	54.00	198	343	Average
2		5460.000	41.57	2.07	43.65	-10.35	54.00	198	343	Average
3		5467.530	44.50	2.10	46.60	N/A	N/A	198	343	Average
4		5470.000	45.25	2.11	47.36	N/A	N/A	198	343	Average
5		5494.080	101.11	2.18	103.29	N/A	N/A	198	343	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ANT 6+7	Test Voltage	By Notebook PC

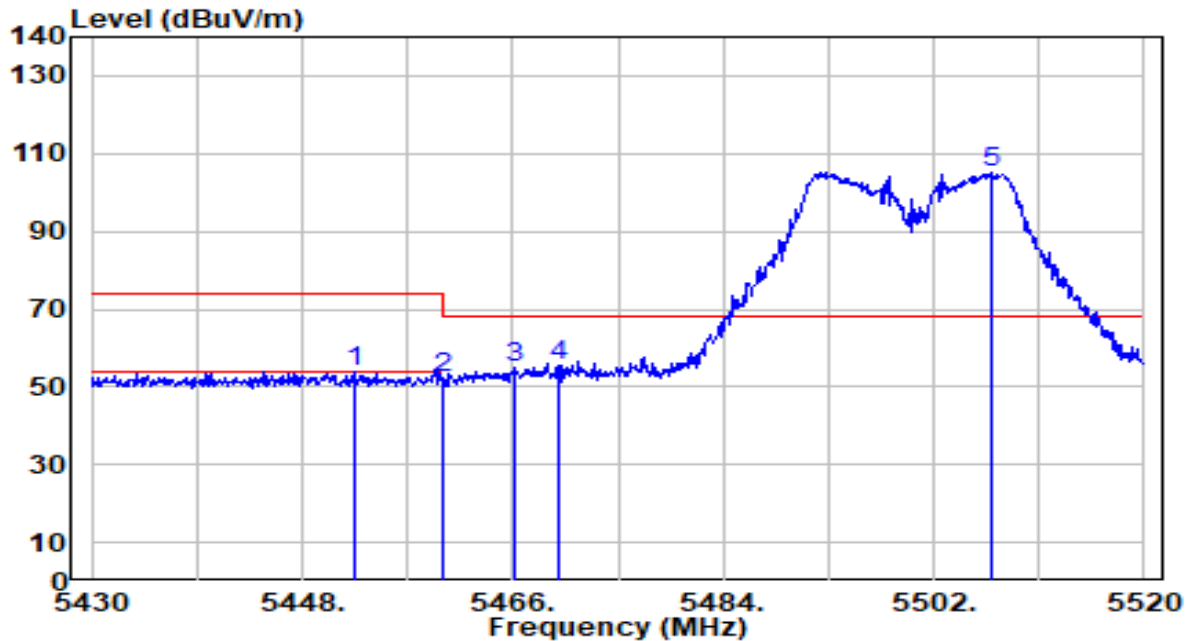


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5452.410	52.02	2.05	54.08	-19.92	74.00	100	326	Peak
2	5460.000	50.44	2.07	52.52	-21.48	74.00	100	326	Peak
3	5466.270	53.03	2.09	55.12	-13.08	68.20	100	326	Peak
4	* 5470.000	53.23	2.11	55.33	-12.87	68.20	100	326	Peak
5	5506.860	102.73	2.23	104.96	N/A	N/A	100	326	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ANT 6+7	Test Voltage	By Notebook PC

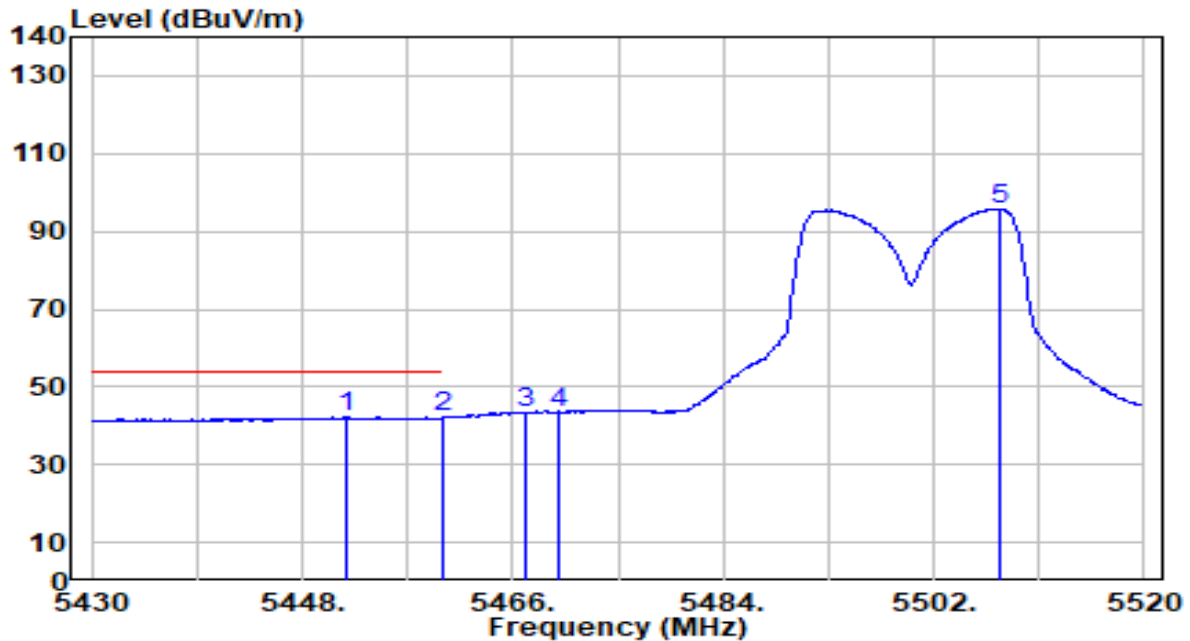


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5451.780	40.01	2.05	42.05	-11.95	54.00	100	326	Average
2	*	5460.000	40.00	2.07	42.07	-11.93	54.00	100	326	Average
3		5467.080	41.43	2.10	43.53	N/A	N/A	100	326	Average
4		5470.000	41.42	2.11	43.52	N/A	N/A	100	326	Average
5		5507.670	93.45	2.23	95.68	N/A	N/A	100	326	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-20MHz_TX_Band3_CH 140_ANT 6+7	Test Voltage	By Notebook PC

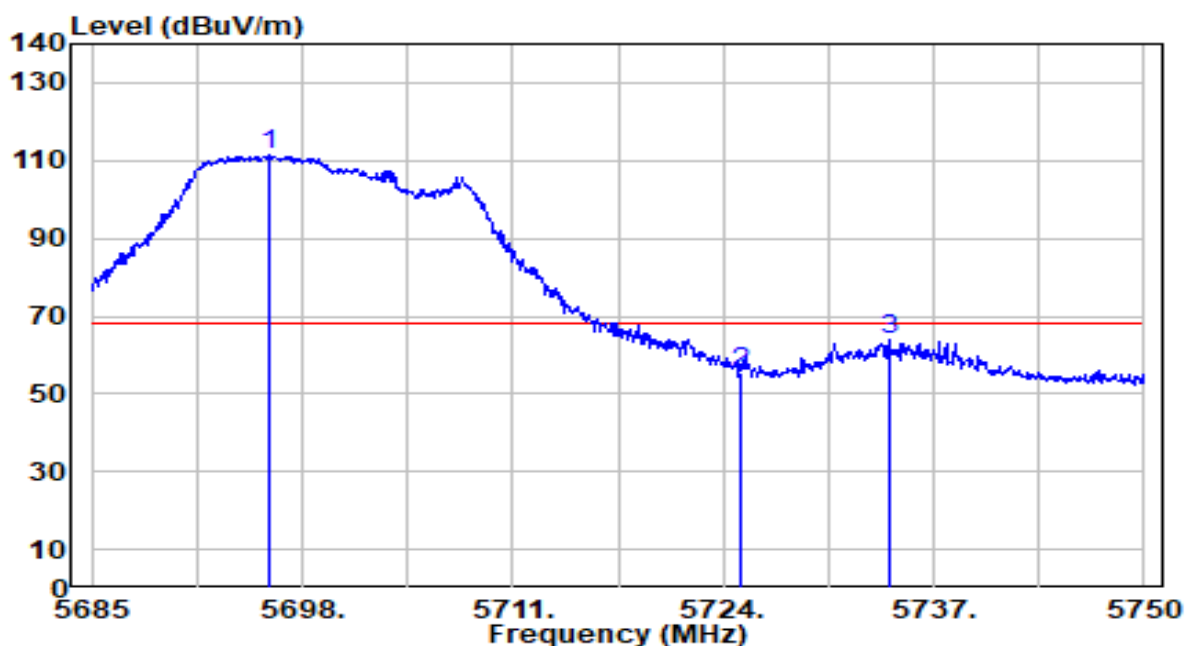


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5695.920	108.32	3.10	111.42	N/A	N/A	213	360	Peak
2	5725.000	52.15	3.25	55.41	-12.79	68.20	213	360	Peak
3	* 5734.205	60.81	3.30	64.11	-4.09	68.20	213	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-20MHz_TX_Band3_CH 140_ANT 6+7	Test Voltage	By Notebook PC

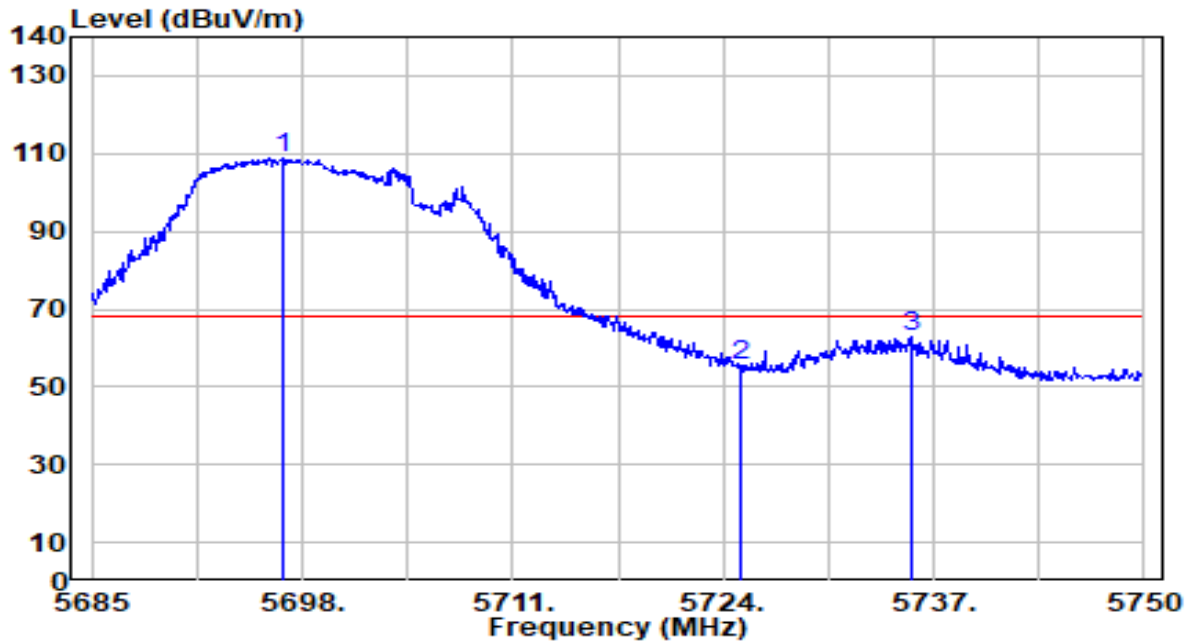


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5696.895	105.61	3.10	108.71	N/A	N/A	142	68	Peak
2	5725.000	52.02	3.25	55.27	-12.93	68.20	142	68	Peak
3	* 5735.570	59.42	3.31	62.73	-5.47	68.20	142	68	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-06-25
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-20MHz_TX_Band4_CH 149_ANT 6+7	Test Voltage	By Notebook PC

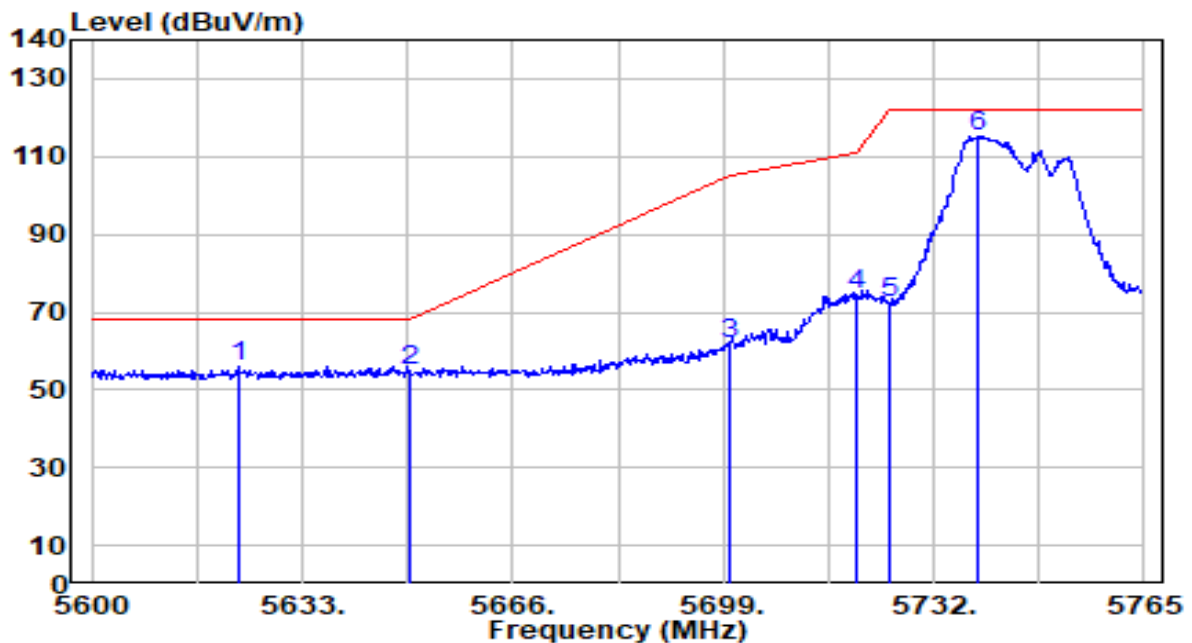


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5622.935	53.23	2.71	55.95	-12.25	68.20	214	340	Peak
2		5650.000	51.90	2.86	54.75	-13.45	68.20	214	340	Peak
3		5700.000	58.90	3.12	62.02	-43.18	105.20	214	340	Peak
4		5720.000	71.27	3.23	74.50	-36.30	110.80	214	340	Peak
5		5725.000	69.24	3.25	72.49	-49.71	122.20	214	340	Peak
6		5738.930	111.78	3.33	115.11	N/A	N/A	214	340	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-06-25
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-20MHz_TX_Band4_CH 149_ANT 6+7	Test Voltage	By Notebook PC

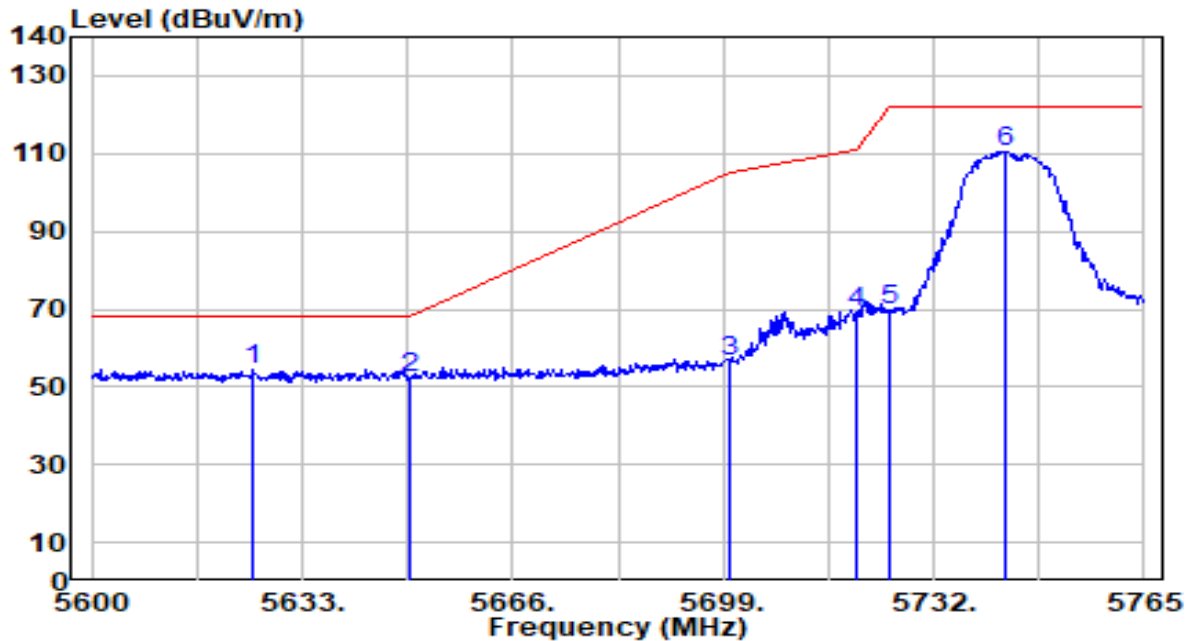


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5625.245	51.83	2.73	54.56	-13.64	68.20	207	70	Peak
2		5650.000	49.58	2.86	52.44	-15.76	68.20	207	70	Peak
3		5700.000	53.19	3.12	56.31	-48.89	105.20	207	70	Peak
4		5720.000	65.74	3.23	68.96	-41.84	110.80	207	70	Peak
5		5725.000	66.42	3.25	69.68	-52.52	122.20	207	70	Peak
6		5743.220	107.26	3.35	110.62	N/A	N/A	207	70	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-06-25
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-20MHz_TX_Band4_CH 165_ANT 6+7	Test Voltage	By Notebook PC

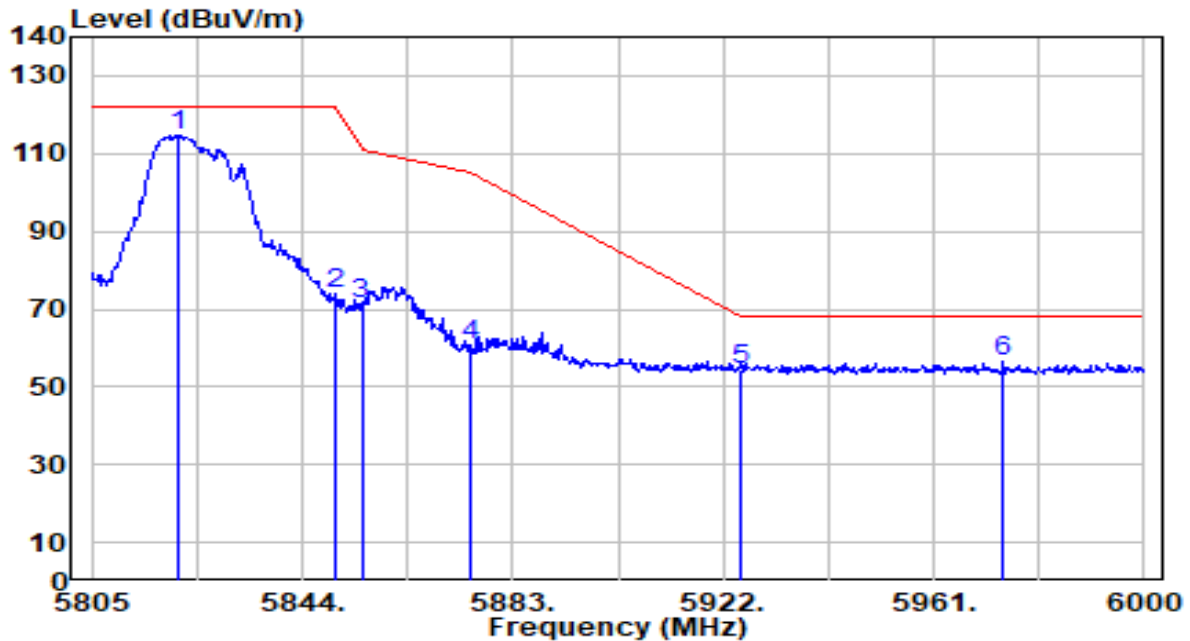


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5820.795	111.05	3.65	114.70	N/A	N/A	246	337	Peak
2	5850.000	70.17	3.63	73.80	-48.40	122.20	246	337	Peak
3	5855.000	67.55	3.63	71.18	-39.62	110.80	246	337	Peak
4	5875.000	57.06	3.61	60.67	-44.53	105.20	246	337	Peak
5	5925.000	50.90	3.59	54.49	-13.71	68.20	246	337	Peak
6	* 5973.870	52.76	3.58	56.34	-11.86	68.20	246	337	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-06-25
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-20MHz_TX_Band4_CH 165_ANT 6+7	Test Voltage	By Notebook PC

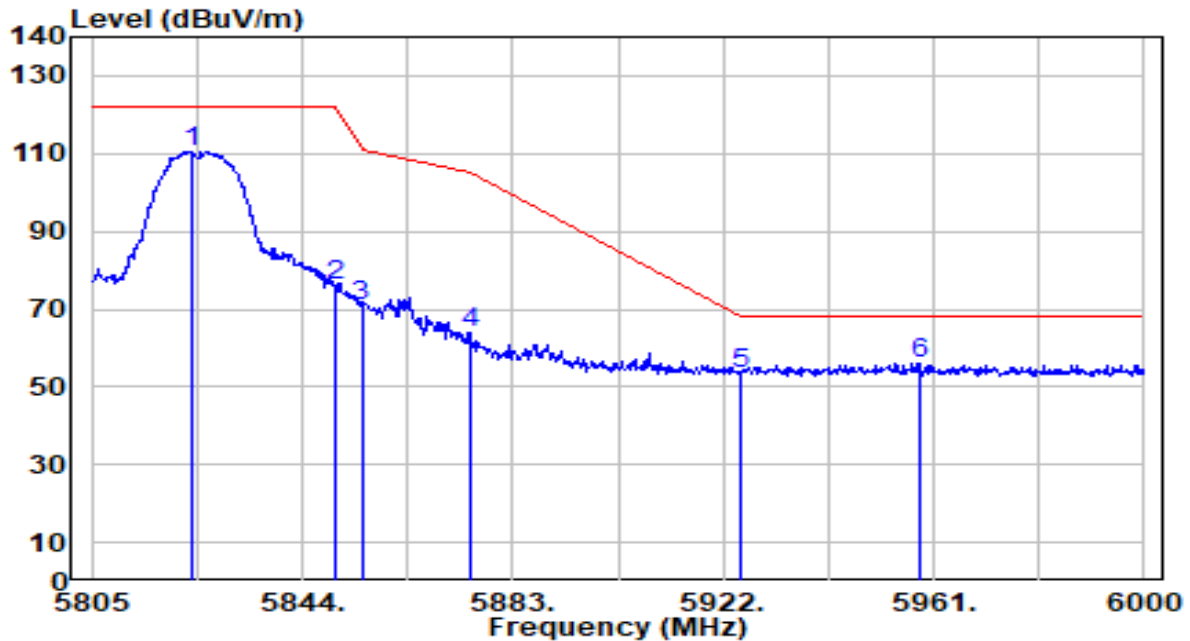


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5823.525	106.89	3.65	110.54	N/A	N/A	236	59	Peak
2	5850.000	72.61	3.63	76.24	-45.96	122.20	236	59	Peak
3	5855.000	67.17	3.63	70.80	-40.00	110.80	236	59	Peak
4	5875.000	60.32	3.61	63.93	-41.27	105.20	236	59	Peak
5	5925.000	49.92	3.59	53.51	-14.69	68.20	236	59	Peak
6	* 5958.270	52.38	3.59	55.96	-12.24	68.20	236	59	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-06-25
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 6+7	Test Voltage	By Notebook PC

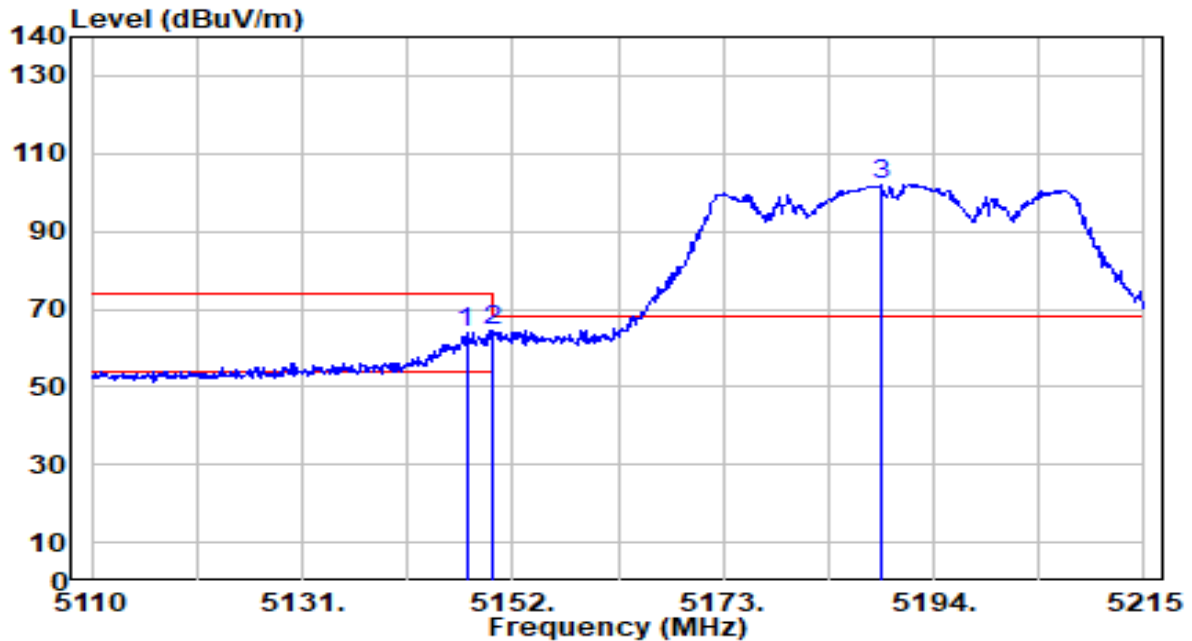


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5147.380	62.09	1.93	64.02	-9.98	74.00	140	151	Peak
2	* 5150.000	62.56	1.94	64.50	-9.50	74.00	140	151	Peak
3	5188.645	100.08	1.96	102.04	N/A	N/A	140	151	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-06-25
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 6+7	Test Voltage	By Notebook PC

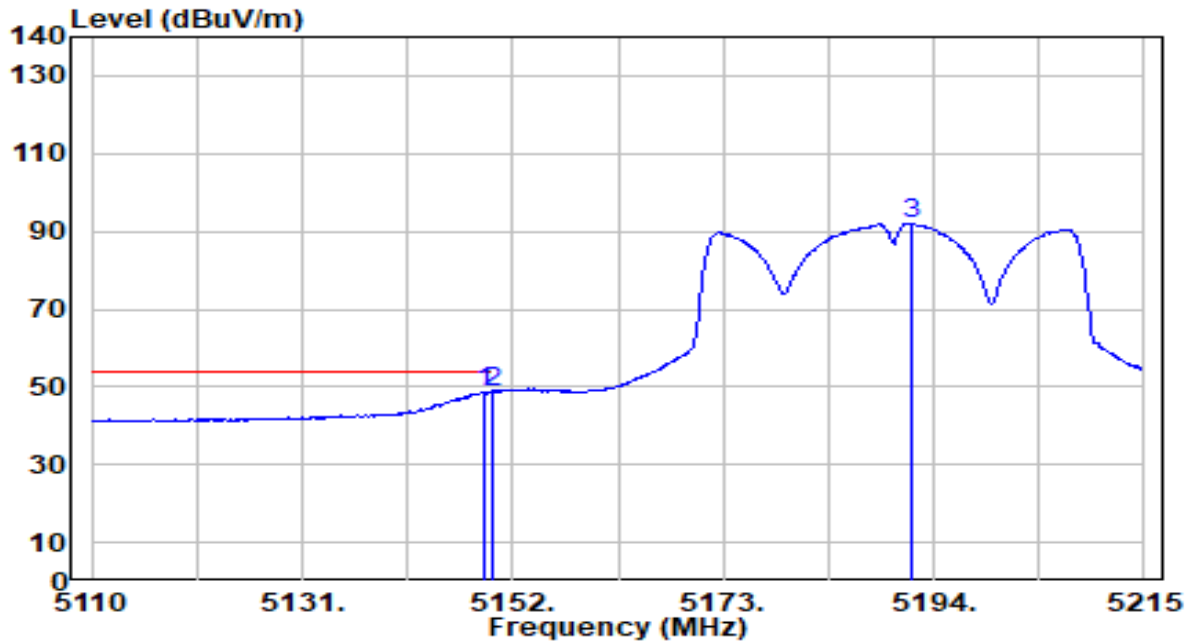


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5149.060	46.49	1.94	48.43	-5.57	54.00	140	151	Average
2	*	5150.000	46.70	1.94	48.64	-5.36	54.00	140	151	Average
3		5191.900	89.90	1.96	91.86	N/A	N/A	140	151	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-06-25
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 6+7	Test Voltage	By Notebook PC

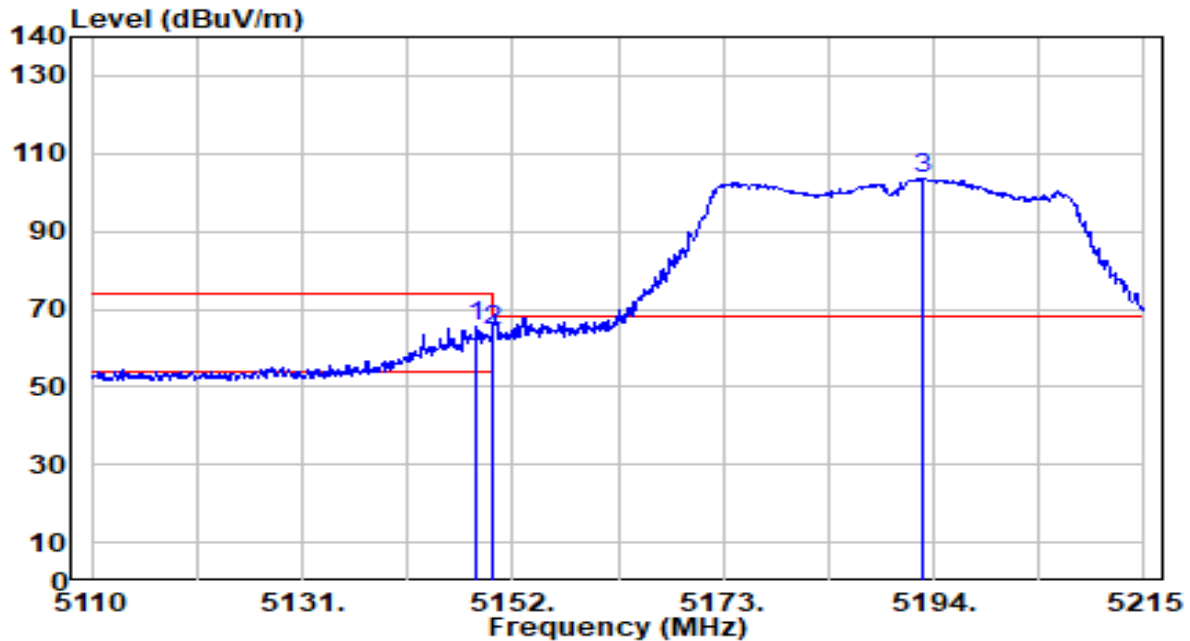


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.325	63.74	1.93	65.68	-8.32	74.00	291	60	Peak
2		5150.000	62.73	1.94	64.67	-9.33	74.00	291	60	Peak
3		5192.950	101.48	1.96	103.45	N/A	N/A	291	60	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-06-25
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 6+7	Test Voltage	By Notebook PC

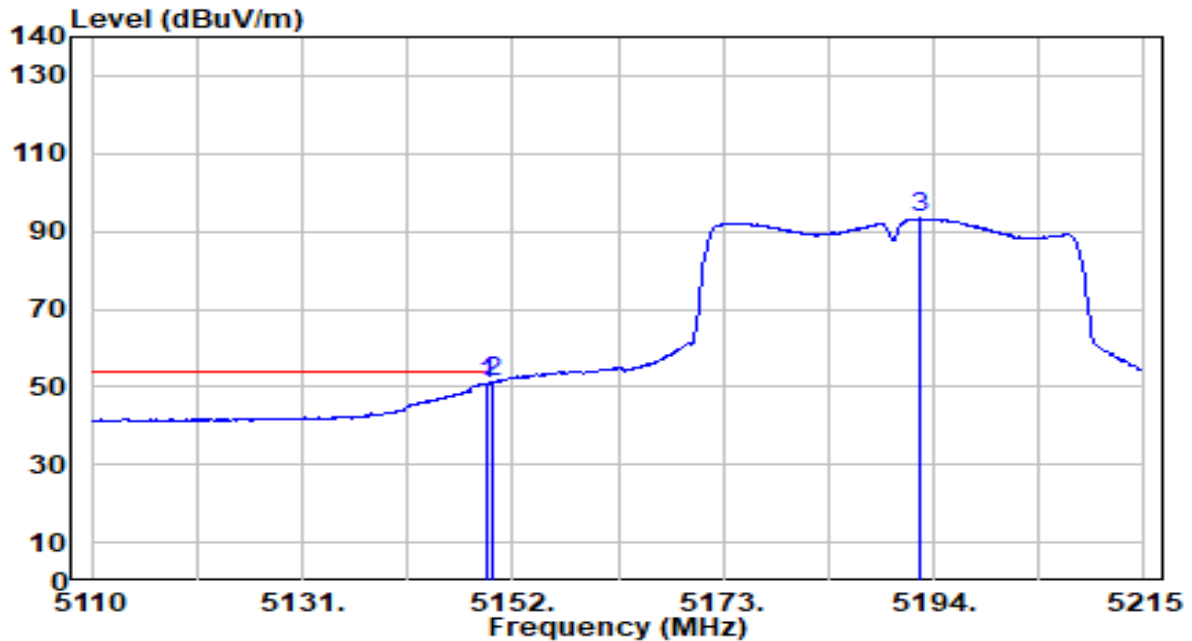


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5149.375	48.80	1.94	50.74	-3.26	54.00	291	60	Average
2	*	5150.000	49.27	1.94	51.21	-2.79	54.00	291	60	Average
3		5192.635	91.36	1.96	93.32	N/A	N/A	291	60	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-06-25
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 6+7	Test Voltage	By Notebook PC

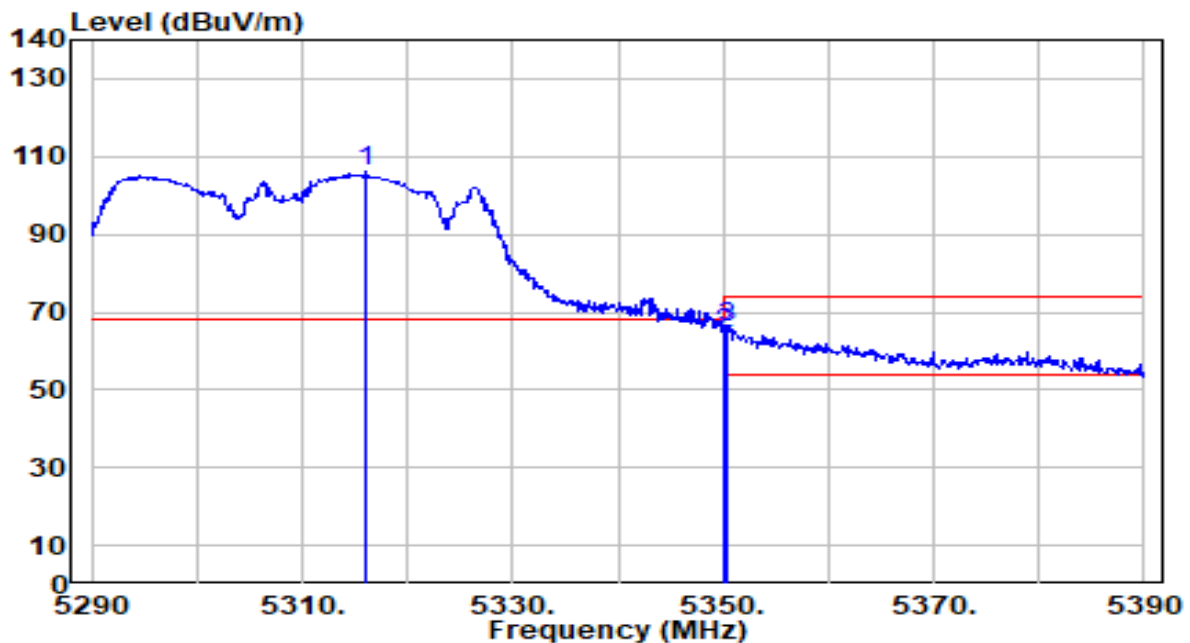


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5316.000	104.05	1.92	105.97	N/A	N/A	227	141	Peak
2	5350.000	62.79	1.90	64.69	-9.31	74.00	227	141	Peak
3	* 5350.400	64.05	1.90	65.95	-8.05	74.00	227	141	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-06-25
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 6+7	Test Voltage	By Notebook PC

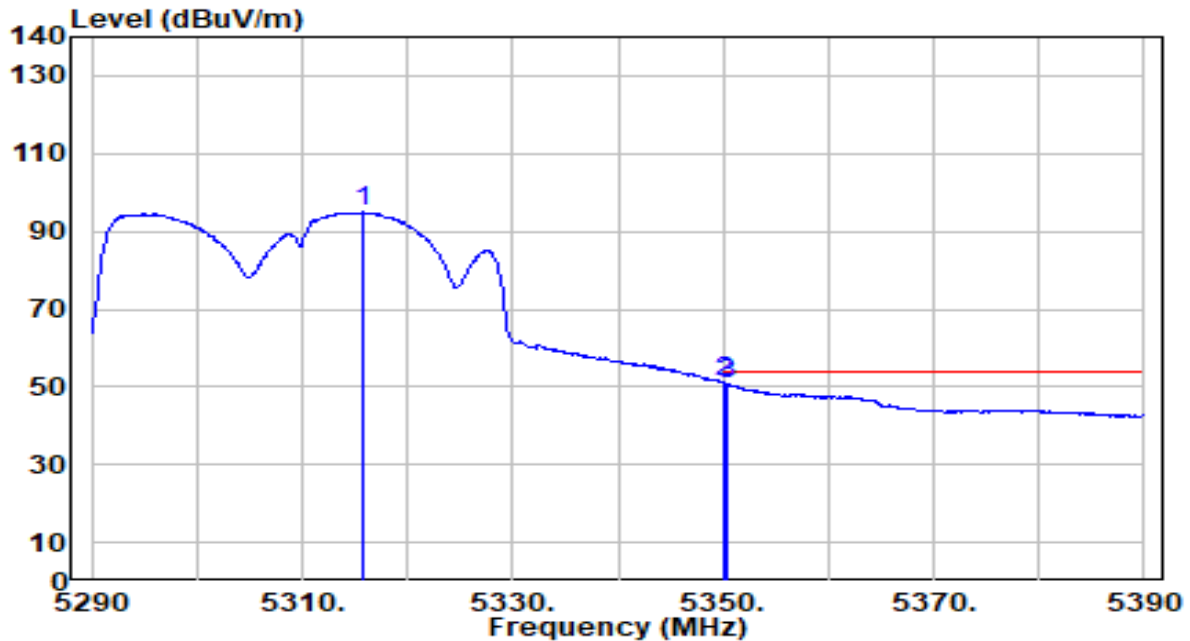


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5315.800	92.93	1.92	94.84	N/A	N/A	227	141	Average
2	* 5350.000	49.16	1.90	51.06	-2.94	54.00	227	141	Average
3	5350.400	48.66	1.90	50.56	-3.44	54.00	227	141	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-06-25
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 6+7	Test Voltage	By Notebook PC

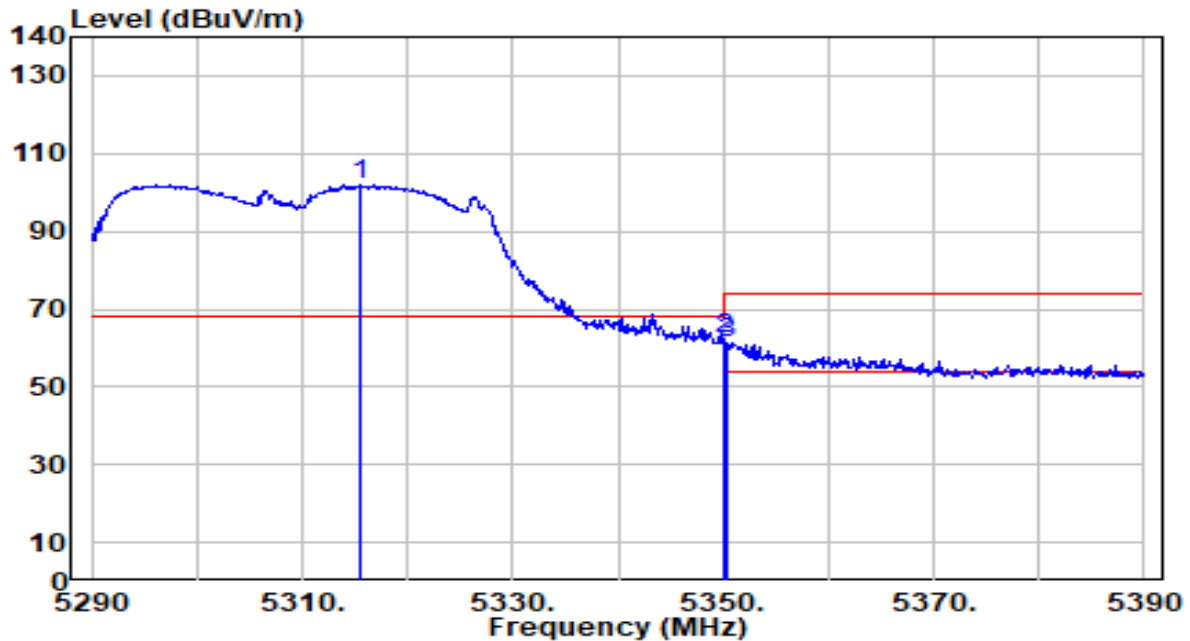


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5315.500	100.22	1.92	102.14	N/A	N/A	200	360	Peak
2	* 5350.000	60.38	1.90	62.29	-11.71	74.00	200	360	Peak
3	5350.400	59.37	1.90	61.27	-12.73	74.00	200	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-06-25
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 6+7	Test Voltage	By Notebook PC

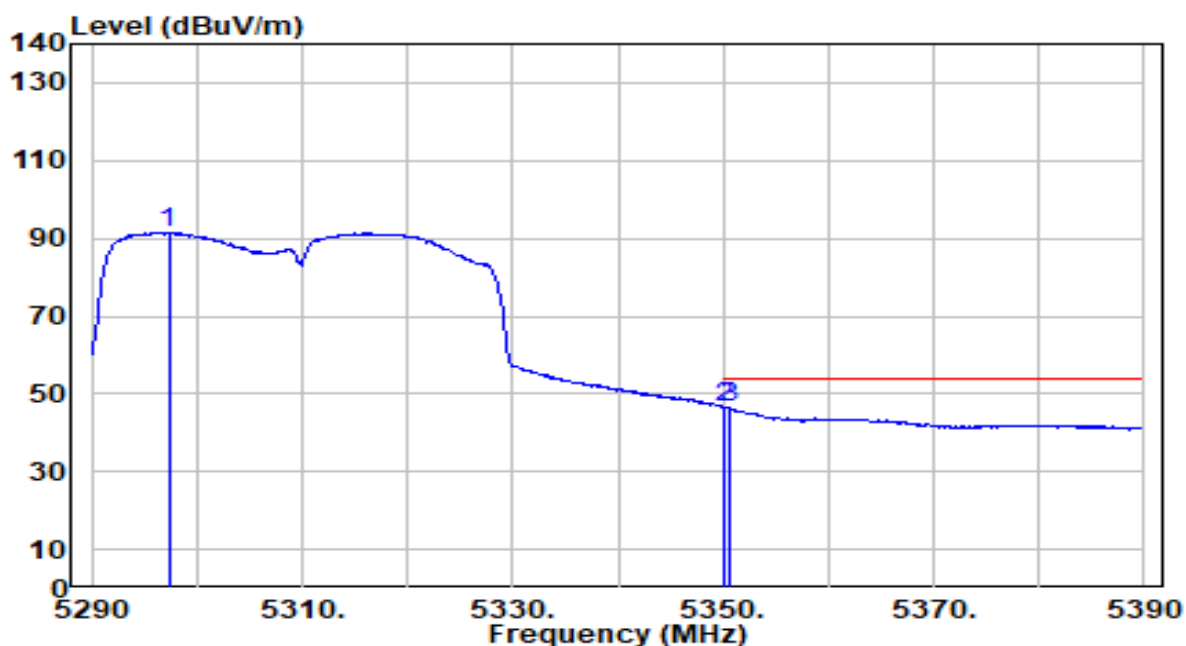


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5297.300	89.52	1.92	91.45	N/A	N/A	200	360	Average
2	5350.000	44.66	1.90	46.57	-7.43	54.00	200	360	Average
3	* 5350.600	44.69	1.90	46.60	-7.40	54.00	200	360	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-40MHz_TX_Band3_CH 102_ANT 6+7	Test Voltage	By Notebook PC

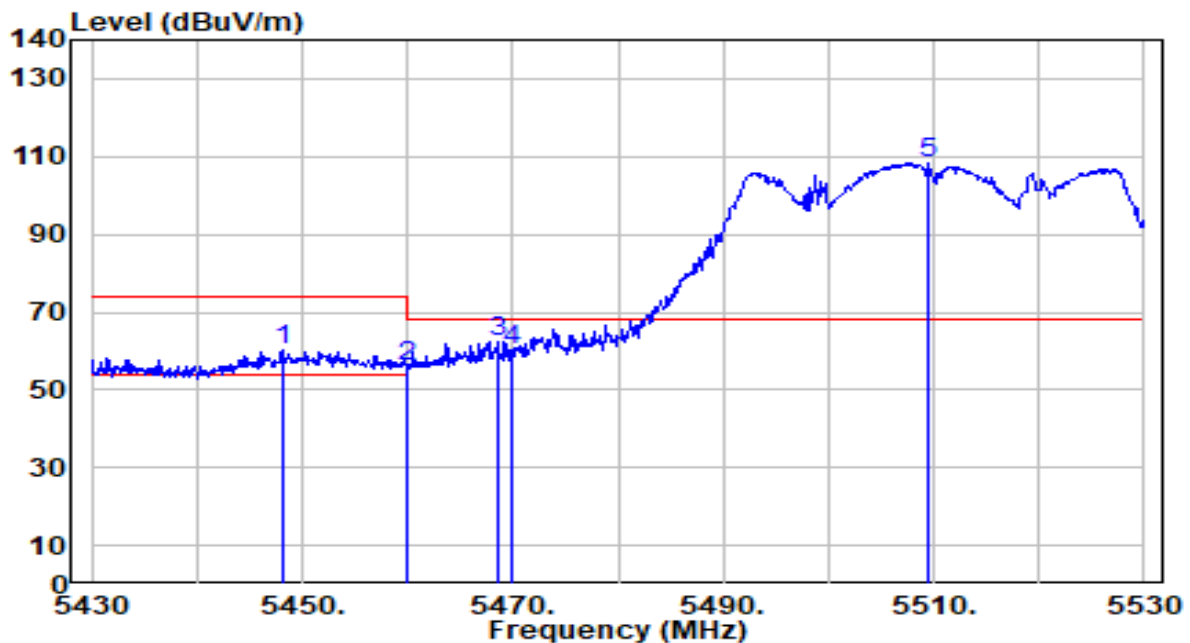


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5448.300	58.01	2.04	60.05	-13.95	74.00	277	10	Peak
2	5460.000	53.90	2.07	55.97	-18.03	74.00	277	10	Peak
3	* 5468.600	60.48	2.10	62.58	-5.62	68.20	277	10	Peak
4	5470.000	57.87	2.11	59.98	-8.22	68.20	277	10	Peak
5	5509.500	106.11	2.24	108.35	N/A	N/A	277	10	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-40MHz_TX_Band3_CH 102_ANT 6+7	Test Voltage	By Notebook PC

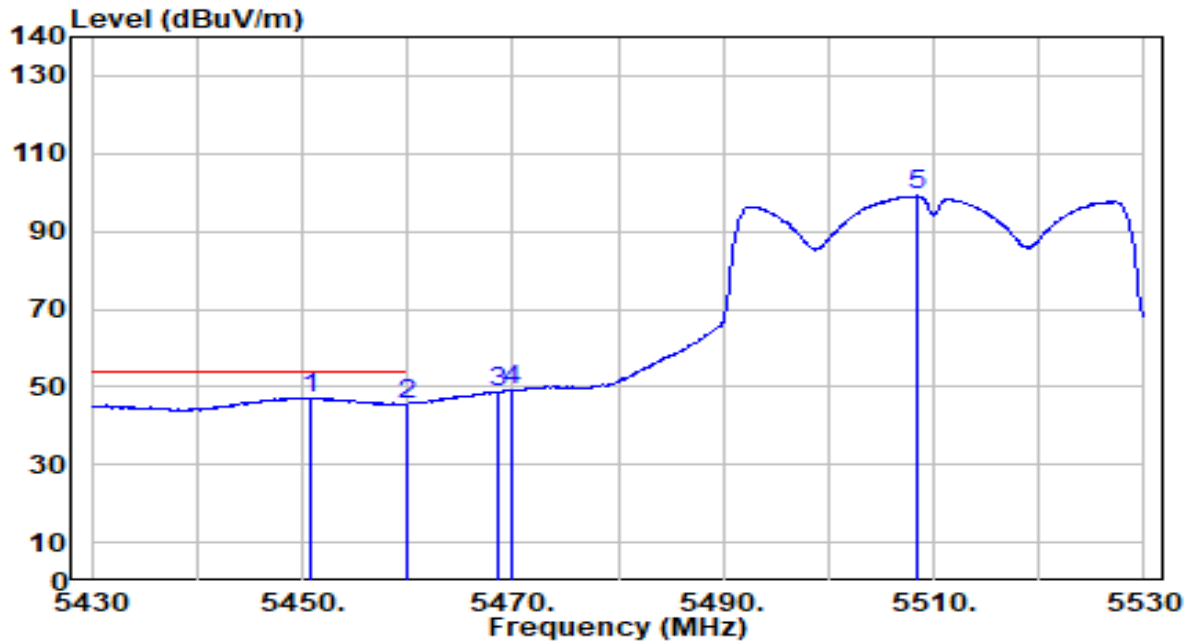


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5450.900	45.10	2.05	47.15	-6.85	54.00	277	10	Average
2		5460.000	43.58	2.07	45.65	-8.35	54.00	277	10	Average
3		5468.700	46.65	2.10	48.75	N/A	N/A	277	10	Average
4		5470.000	47.19	2.11	49.29	N/A	N/A	277	10	Average
5		5508.400	96.92	2.23	99.15	N/A	N/A	277	10	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-40MHz_TX_Band3_CH 102_ANT 6+7	Test Voltage	By Notebook PC

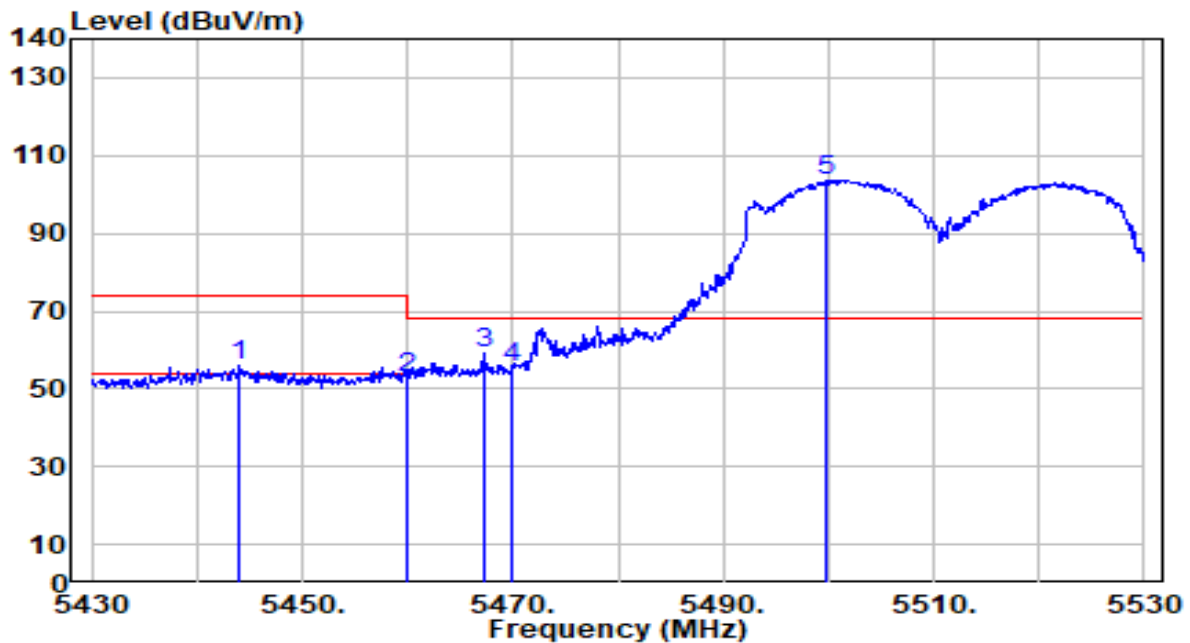


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5444.100	53.75	2.02	55.78	-18.22	74.00	100	316	Peak
2	5460.000	51.01	2.07	53.09	-20.91	74.00	100	316	Peak
3	* 5467.300	57.25	2.10	59.35	-8.85	68.20	100	316	Peak
4	5470.000	53.61	2.11	55.71	-12.49	68.20	100	316	Peak
5	5499.900	101.56	2.20	103.76	N/A	N/A	100	316	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-40MHz_TX_Band3_CH 102_ANT 6+7	Test Voltage	By Notebook PC

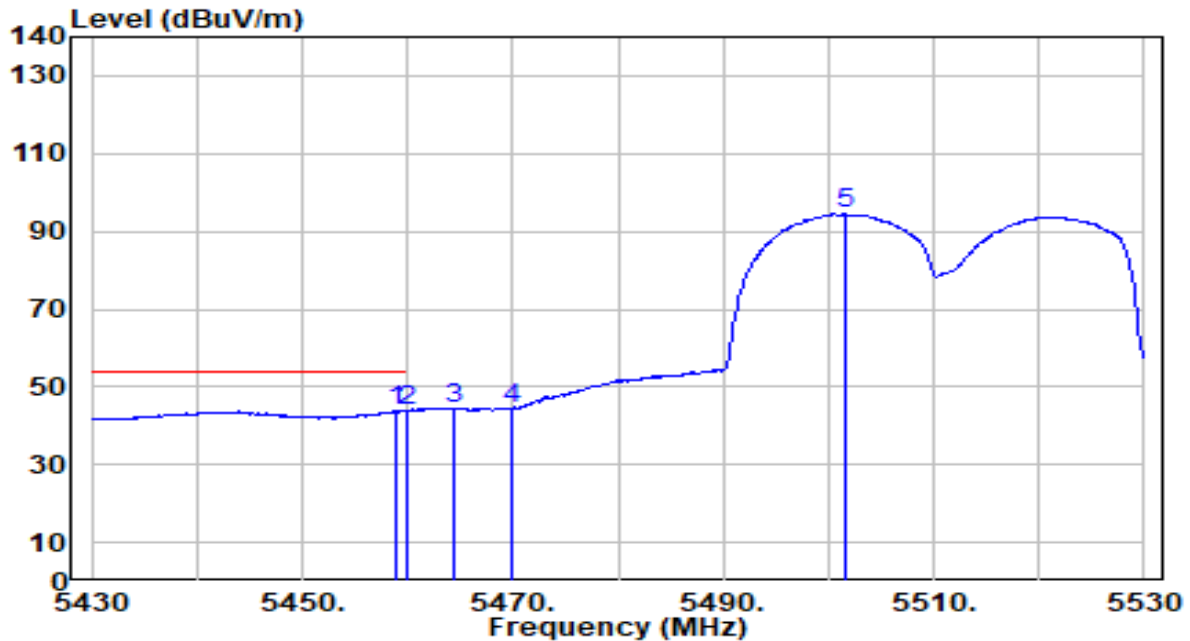


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5459.000	41.69	2.07	43.76	-10.24	54.00	100	316	Average
2	*	5460.000	41.69	2.07	43.77	-10.23	54.00	100	316	Average
3		5464.400	42.43	2.09	44.52	N/A	N/A	100	316	Average
4		5470.000	42.42	2.11	44.53	N/A	N/A	100	316	Average
5		5501.500	92.28	2.21	94.49	N/A	N/A	100	316	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-06-25
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-40MHz_TX_Band3_CH 134_ANT 6+7	Test Voltage	By Notebook PC

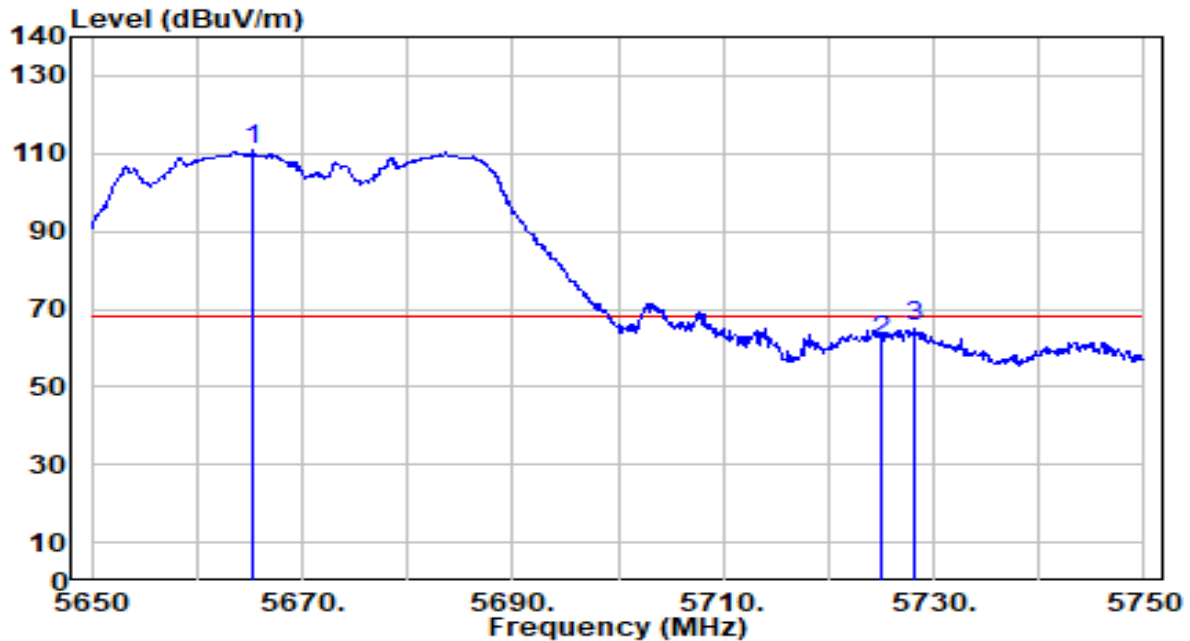


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5665.400	107.74	2.94	110.68	N/A	N/A	220	346	Peak
2	5725.000	58.80	3.25	62.06	-6.14	68.20	220	346	Peak
3	* 5728.200	62.08	3.27	65.35	-2.85	68.20	220	346	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-06-25
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-40MHz_TX_Band3_CH 134_ANT 6+7	Test Voltage	By Notebook PC

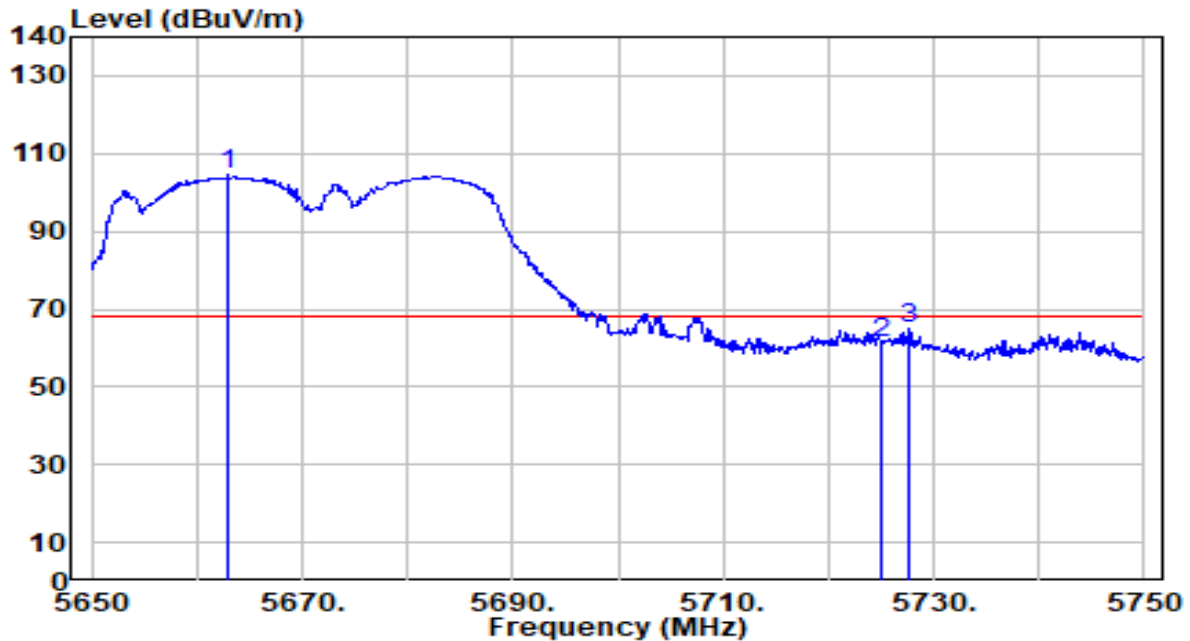


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5663.000	101.47	2.92	104.39	N/A	N/A	133	63	Peak
2	5725.000	57.95	3.25	61.21	-6.99	68.20	133	63	Peak
3	* 5727.700	61.65	3.27	64.92	-3.28	68.20	133	63	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-06-25
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-40MHz_TX_Band4_CH 151_ANT 6+7	Test Voltage	By Notebook PC

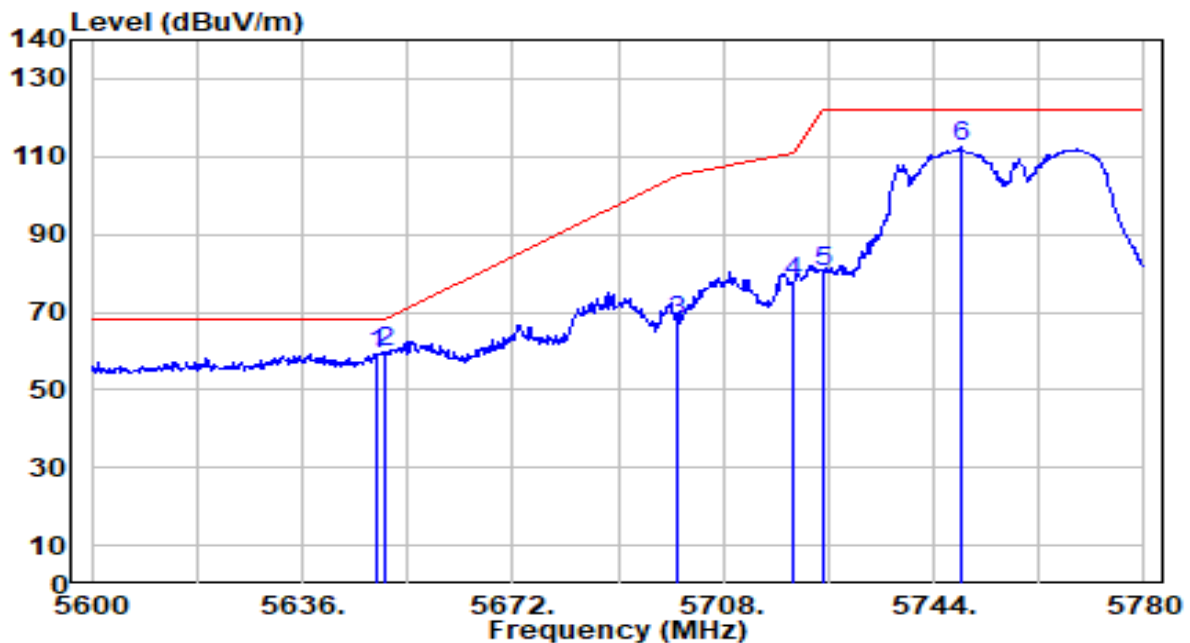


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5648.780	56.29	2.85	59.14	-9.06	68.20	202	340	Peak
2	*	5650.000	56.86	2.86	59.72	-8.48	68.20	202	340	Peak
3		5700.000	64.41	3.12	67.53	-37.67	105.20	202	340	Peak
4		5720.000	74.54	3.23	77.77	-33.03	110.80	202	340	Peak
5		5725.000	76.97	3.25	80.22	-41.98	122.20	202	340	Peak
6		5748.500	108.93	3.38	112.31	N/A	N/A	202	340	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-06-25
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-40MHz_TX_Band4_CH 151_ANT 6+7	Test Voltage	By Notebook PC

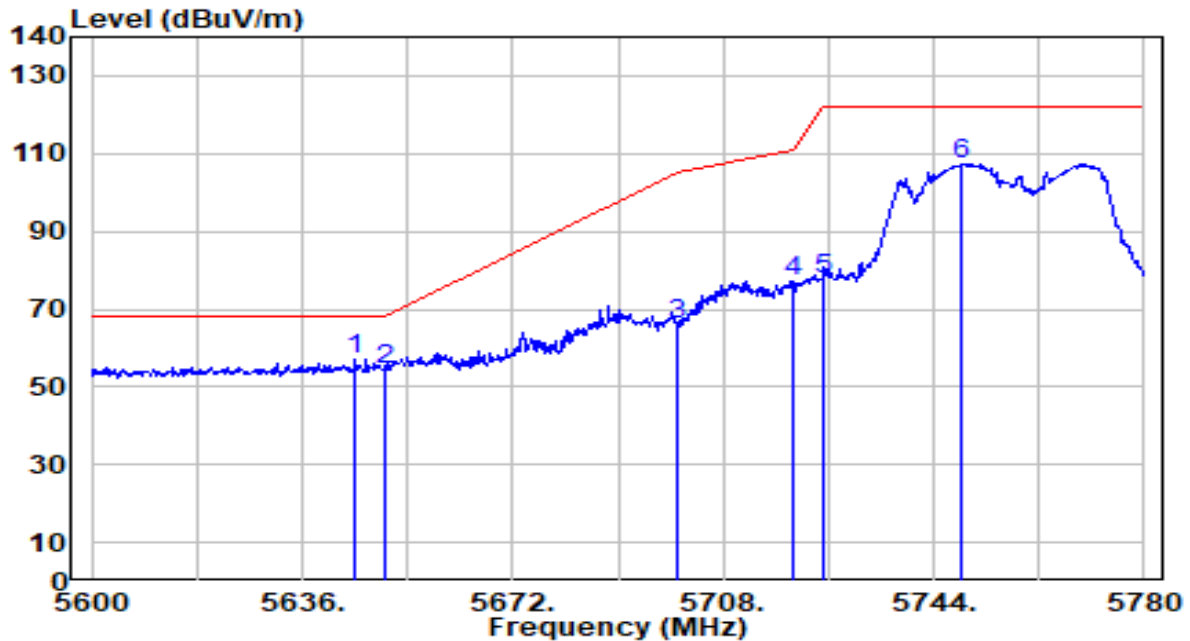


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5645.000	54.47	2.83	57.30	-10.90	68.20	133	56	Peak
2		5650.000	51.65	2.86	54.51	-13.69	68.20	133	56	Peak
3		5700.000	63.12	3.12	66.24	-38.96	105.20	133	56	Peak
4		5720.000	73.94	3.23	77.17	-33.63	110.80	133	56	Peak
5		5725.000	74.33	3.25	77.59	-44.61	122.20	133	56	Peak
6		5748.680	104.07	3.38	107.45	N/A	N/A	133	56	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-06-25
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-40MHz_TX_Band4_CH 159_ANT 6+7	Test Voltage	By Notebook PC

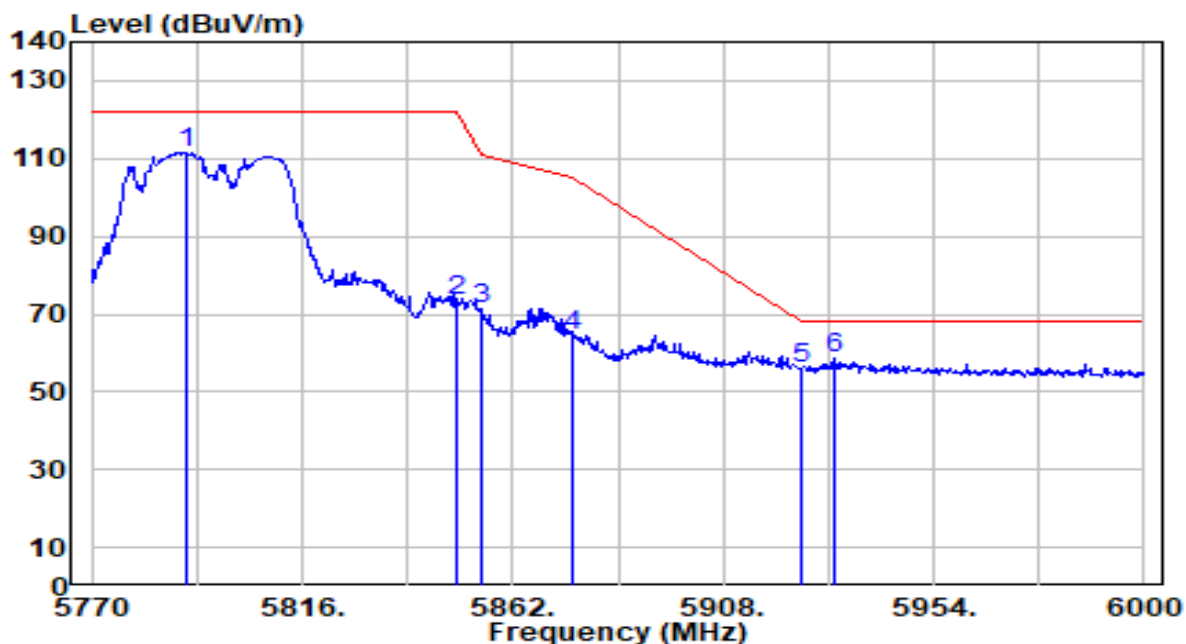


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5790.930	108.05	3.61	111.67	N/A	N/A	224	339	Peak
2	5850.000	69.98	3.63	73.61	-48.59	122.20	224	339	Peak
3	5855.000	67.70	3.63	71.33	-39.47	110.80	224	339	Peak
4	5875.000	60.62	3.61	64.24	-40.96	105.20	224	339	Peak
5	5925.000	52.16	3.59	55.75	-12.45	68.20	224	339	Peak
6	* 5932.380	55.21	3.59	58.80	-9.40	68.20	224	339	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-06-25
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-40MHz_TX_Band4_CH 159_ANT 6+7	Test Voltage	By Notebook PC

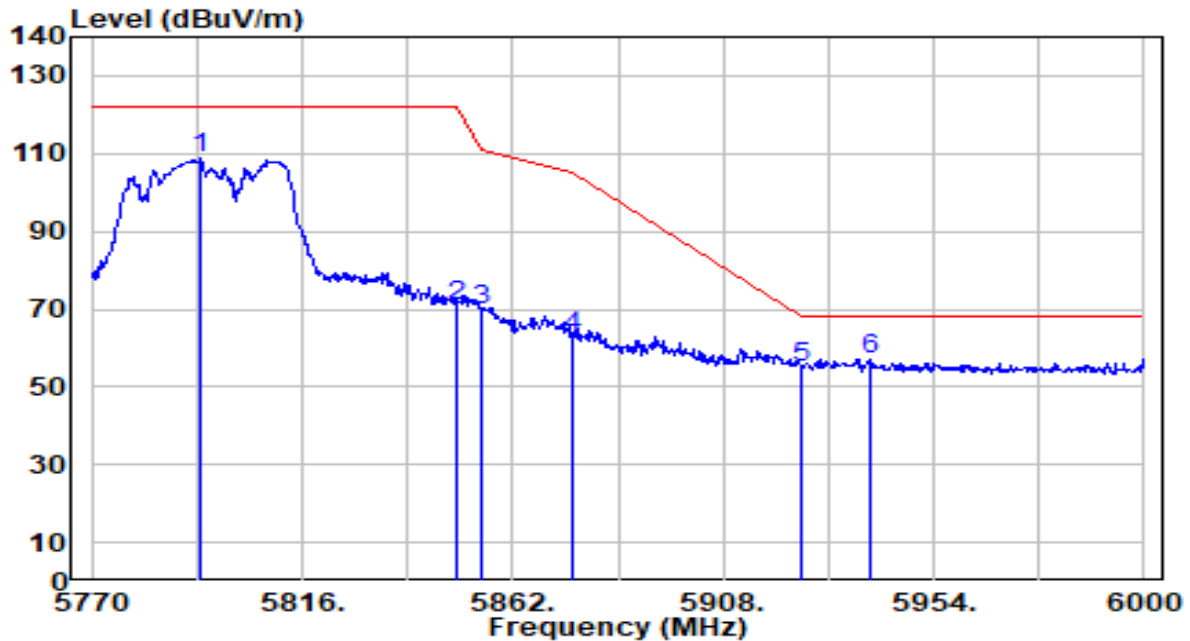


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5793.690	105.06	3.63	108.69	N/A	N/A	177	59	Peak
2	5850.000	67.40	3.63	71.03	-51.17	122.20	177	59	Peak
3	5855.000	66.22	3.63	69.85	-40.95	110.80	177	59	Peak
4	5875.000	59.03	3.61	62.65	-42.55	105.20	177	59	Peak
5	5925.000	51.60	3.59	55.19	-13.01	68.20	177	59	Peak
6	* 5939.970	53.41	3.59	57.00	-11.20	68.20	177	59	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-06-25
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 6+7	Test Voltage	By Notebook PC

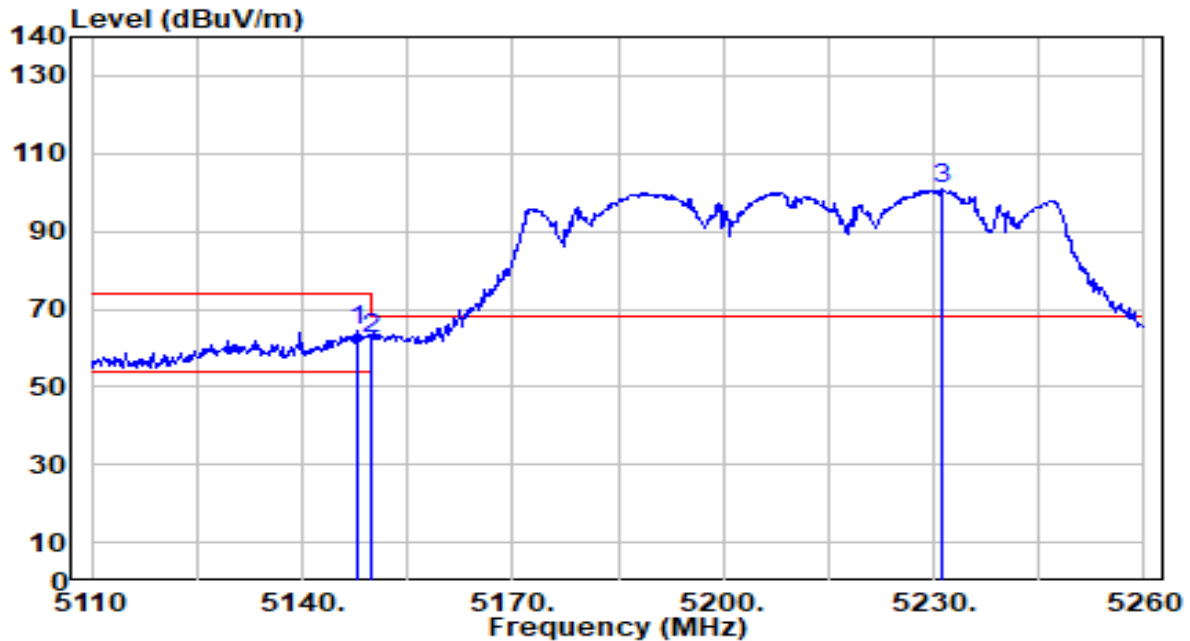


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.800	62.30	1.93	64.23	-9.77	74.00	131	144	Peak
2		5150.000	60.58	1.94	62.52	-11.48	74.00	131	144	Peak
3		5231.350	98.89	1.95	100.84	N/A	N/A	131	144	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-06-25
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 6+7	Test Voltage	By Notebook PC

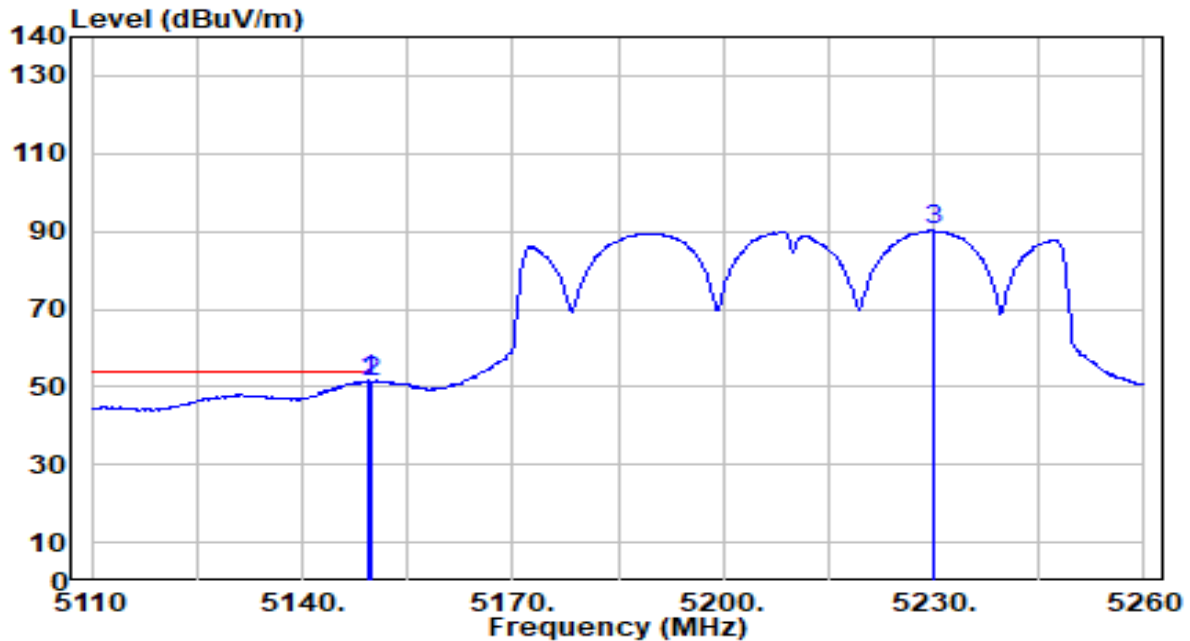


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.300	49.60	1.94	51.53	-2.47	54.00	131	144	Average
2		5150.000	49.25	1.94	51.18	-2.82	54.00	131	144	Average
3		5229.850	88.38	1.95	90.33	N/A	N/A	131	144	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-06-25
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 6+7	Test Voltage	By Notebook PC

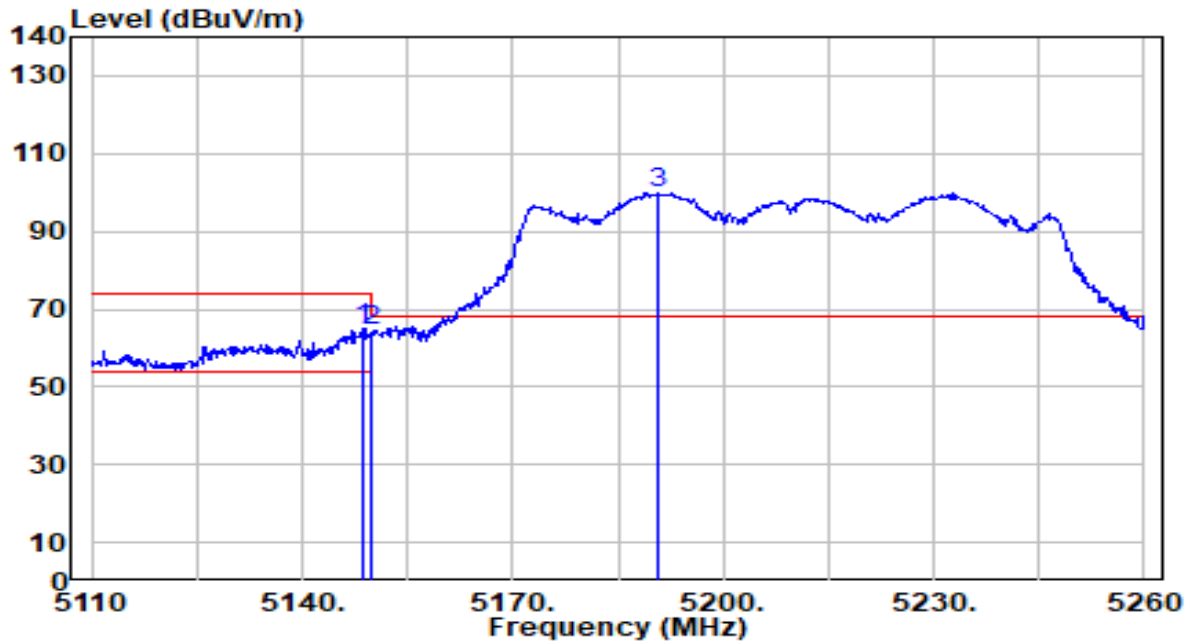


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.700	63.20	1.94	65.14	-8.86	74.00	214	63	Peak
2		5150.000	62.40	1.94	64.34	-9.66	74.00	214	63	Peak
3		5190.550	98.08	1.96	100.04	N/A	N/A	214	63	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-06-25
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 6+7	Test Voltage	By Notebook PC

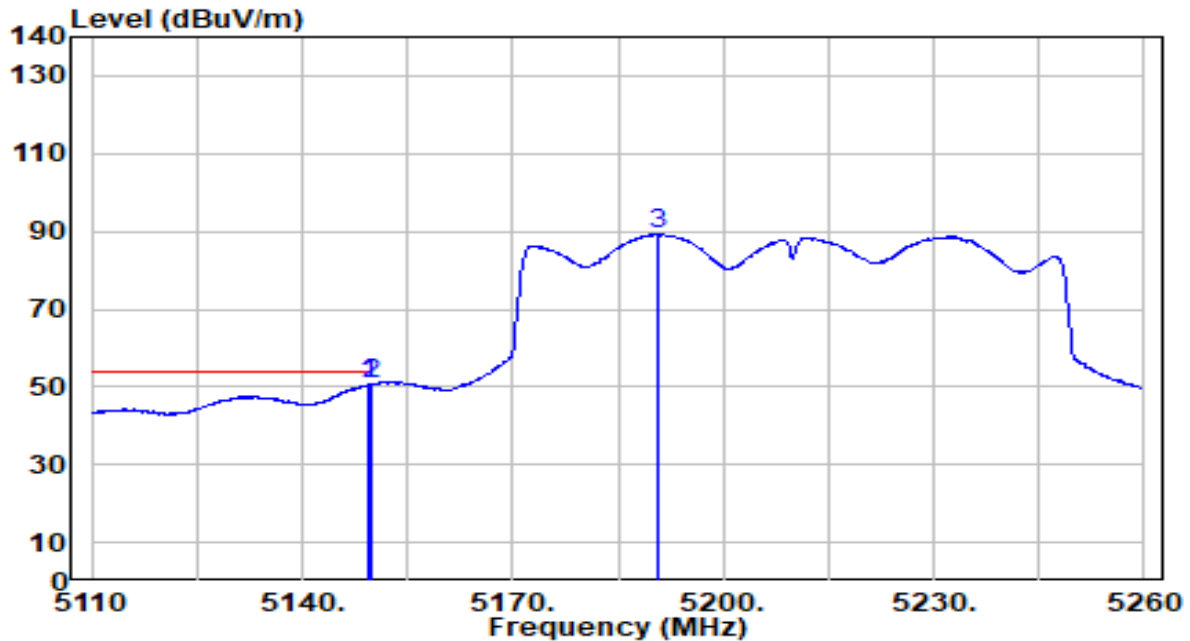


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5149.450	48.71	1.94	50.65	-3.35	54.00	214	63	Average
2	*	5150.000	48.81	1.94	50.74	-3.26	54.00	214	63	Average
3		5190.700	87.27	1.96	89.23	N/A	N/A	214	63	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-06-25
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 6+7	Test Voltage	By Notebook PC

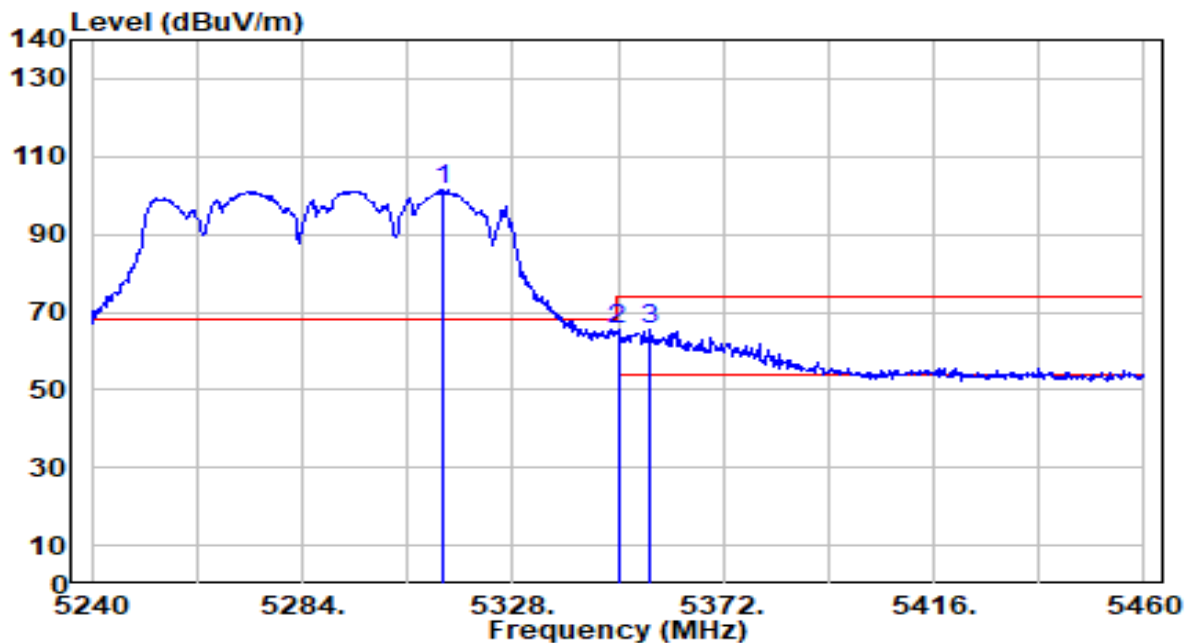


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5313.260	99.47	1.92	101.39	N/A	N/A	210	155	Peak
2	* 5350.000	63.57	1.90	65.48	-8.52	74.00	210	155	Peak
3	5356.600	63.53	1.90	65.43	-8.57	74.00	210	155	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-06-25
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 6+7	Test Voltage	By Notebook PC

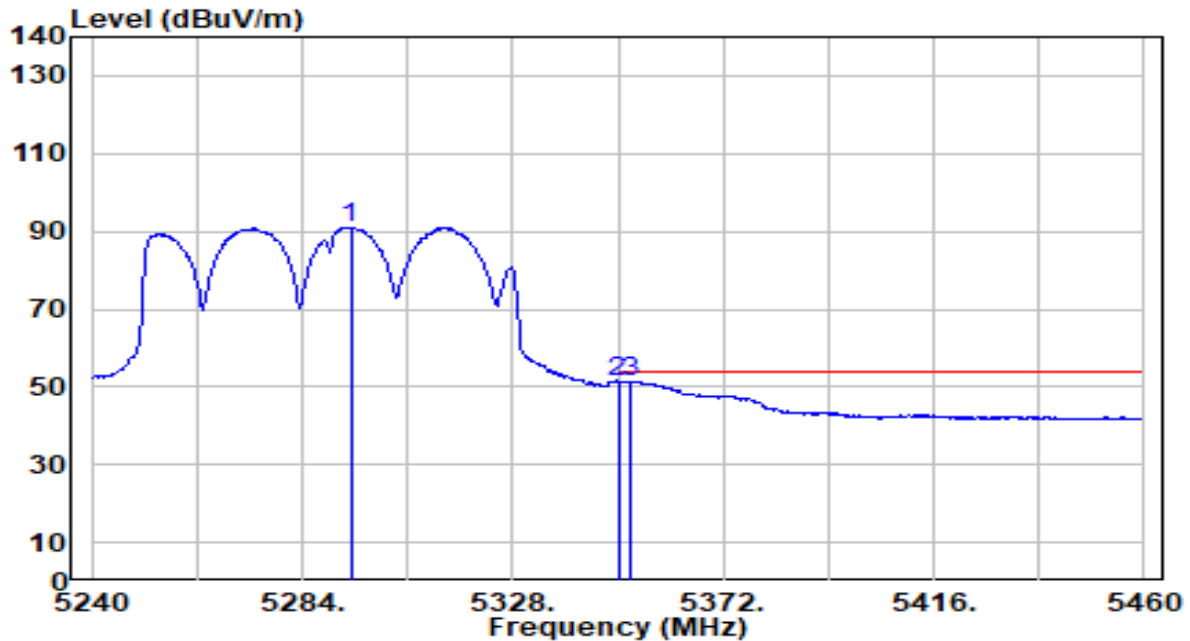


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5294.120	89.01	1.92	90.94	N/A	N/A	210	155	Average
2	5350.000	49.50	1.90	51.40	-2.60	54.00	210	155	Average
3	* 5352.640	49.54	1.90	51.45	-2.55	54.00	210	155	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-06-25
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 6+7	Test Voltage	By Notebook PC

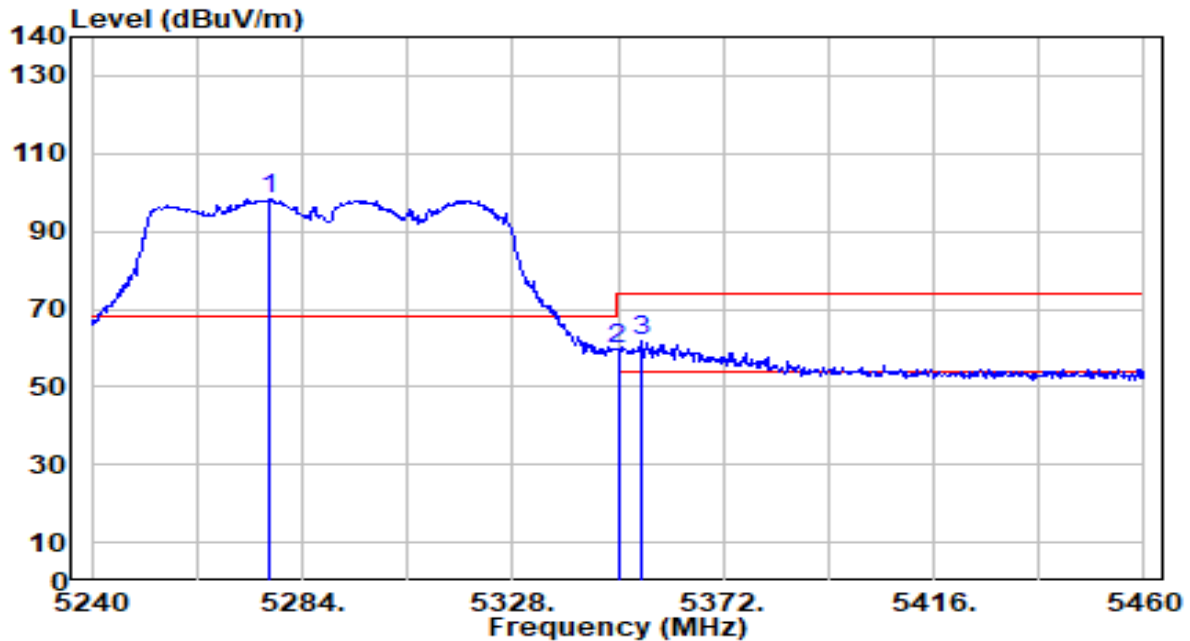


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5277.180	96.37	1.93	98.30	N/A	N/A	197	350	Peak
2	5350.000	57.60	1.90	59.51	-14.49	74.00	197	350	Peak
3	* 5354.840	59.69	1.90	61.59	-12.41	74.00	197	350	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-06-25
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 6+7	Test Voltage	By Notebook PC

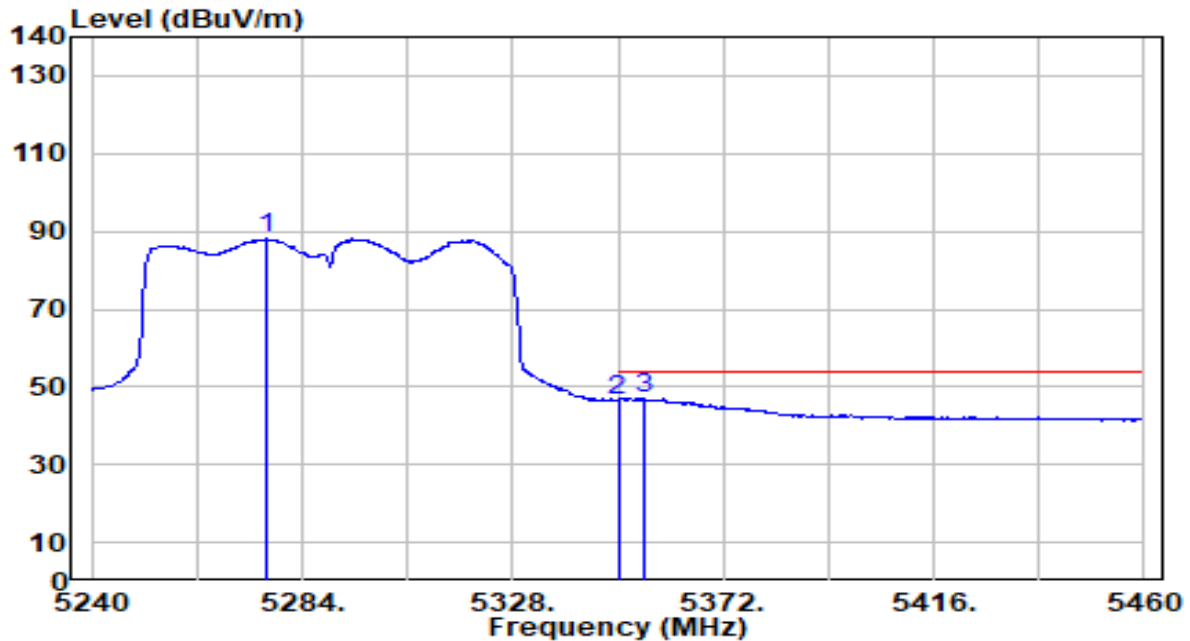


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5276.520	86.08	1.93	88.01	N/A	N/A	197	350	Average
2	5350.000	44.69	1.90	46.59	-7.41	54.00	197	350	Average
3	* 5355.280	45.10	1.90	47.00	-7.00	54.00	197	350	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 6+7	Test Voltage	By Notebook PC

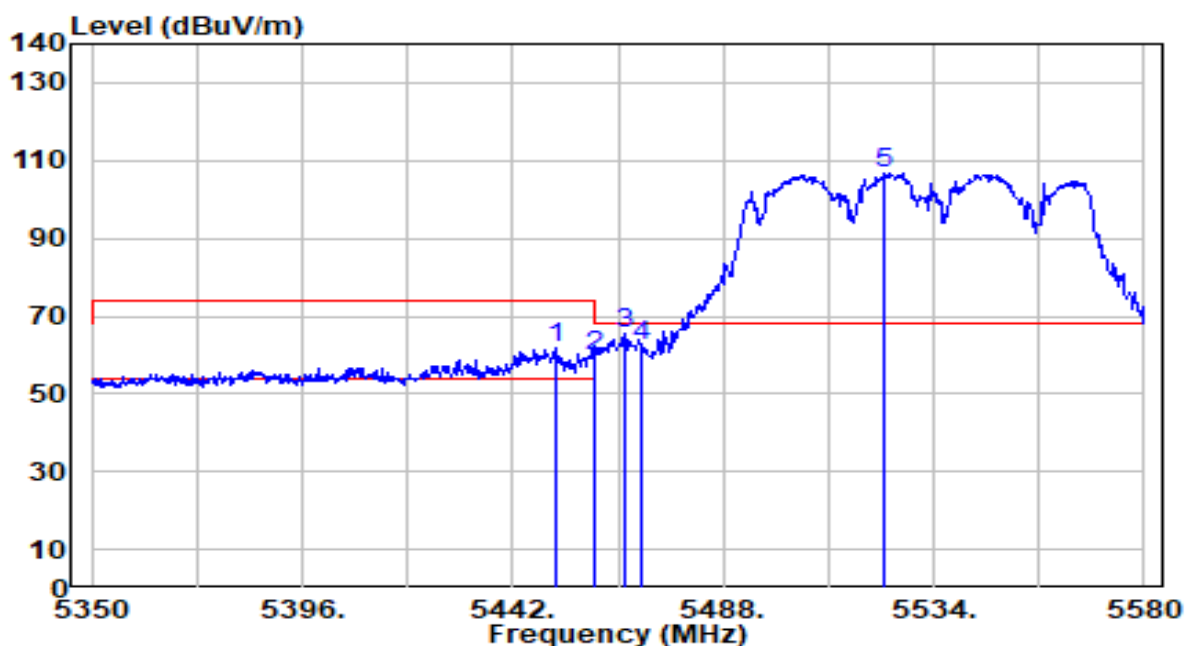


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5451.660	59.72	2.05	61.77	-12.23	74.00	212	9	Peak
2	5460.000	57.59	2.07	59.66	-14.34	74.00	212	9	Peak
3	* 5466.610	63.25	2.10	65.35	-2.85	68.20	212	9	Peak
4	5470.000	60.42	2.11	62.53	-5.67	68.20	212	9	Peak
5	5523.420	104.30	2.29	106.59	N/A	N/A	212	9	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 6+7	Test Voltage	By Notebook PC

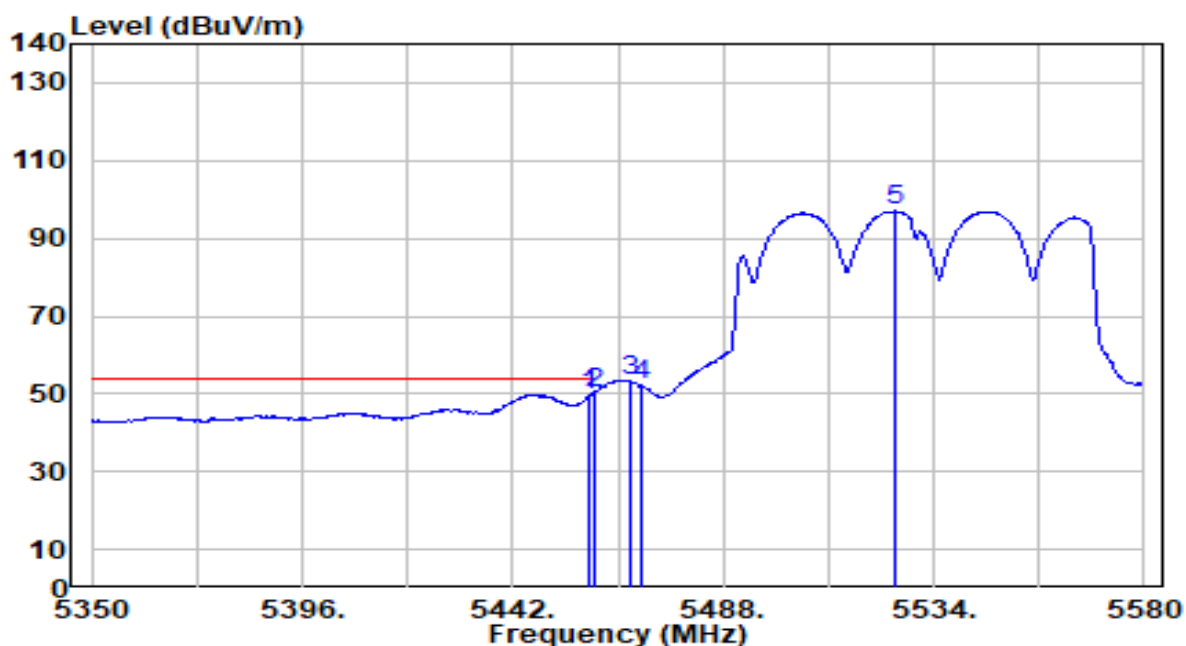


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5458.790	47.65	2.07	49.72	-4.28	54.00	212	9	Average
2	*	5460.000	48.16	2.07	50.24	-3.76	54.00	212	9	Average
3		5467.760	51.39	2.10	53.49	N/A	N/A	212	9	Average
4		5470.000	50.28	2.11	52.38	N/A	N/A	212	9	Average
5		5525.490	94.67	2.30	96.97	N/A	N/A	212	9	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 6+7	Test Voltage	By Notebook PC

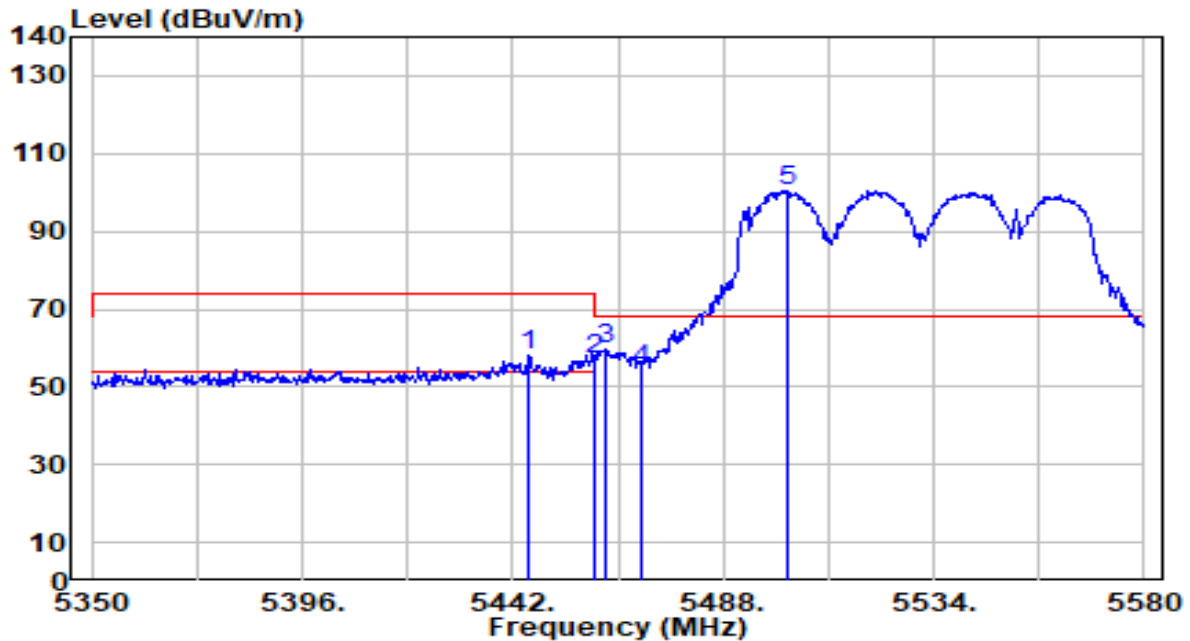


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5445.680	56.01	2.03	58.04	-15.96	74.00	100	315	Peak
2	5460.000	54.96	2.07	57.03	-16.97	74.00	100	315	Peak
3	* 5462.470	57.87	2.08	59.96	-8.24	68.20	100	315	Peak
4	5470.000	52.50	2.11	54.60	-13.60	68.20	100	315	Peak
5	5501.800	98.28	2.21	100.49	N/A	N/A	100	315	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 6+7	Test Voltage	By Notebook PC

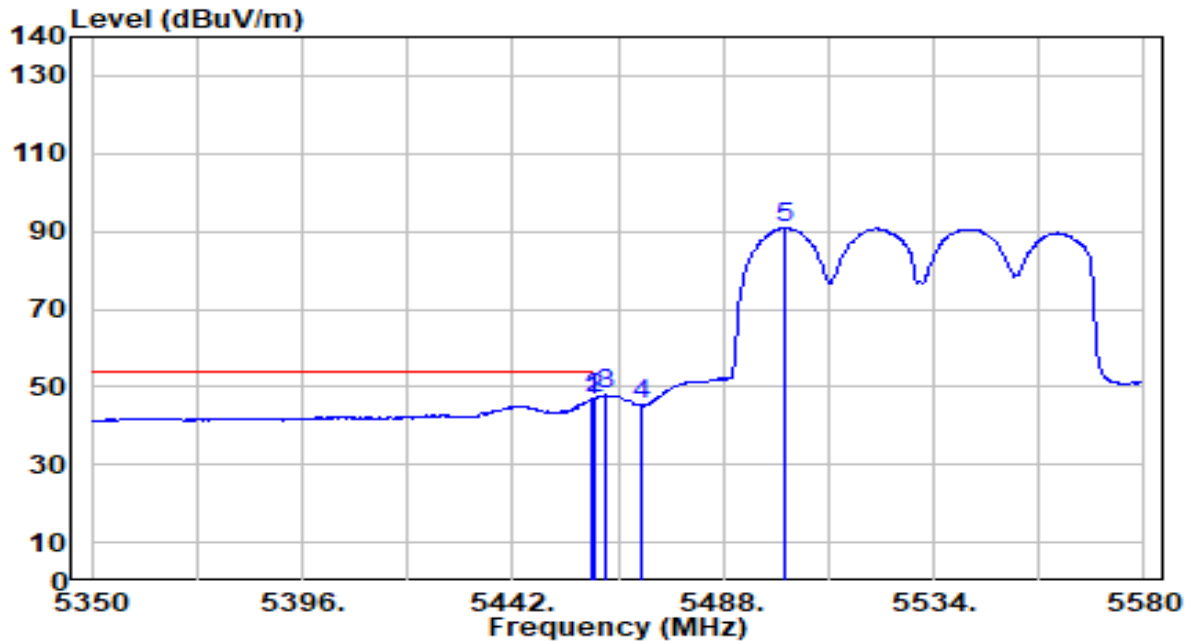


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5459.020	44.61	2.07	46.68	-7.32	54.00	100	315	Average
2	*	5460.000	44.83	2.07	46.90	-7.10	54.00	100	315	Average
3		5462.470	45.79	2.08	47.87	N/A	N/A	100	315	Average
4		5470.000	43.09	2.11	45.19	N/A	N/A	100	315	Average
5		5501.340	88.78	2.21	90.99	N/A	N/A	100	315	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-06-25
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-80MHz_TX_Band4_CH 155_ANT 6+7	Test Voltage	By Notebook PC

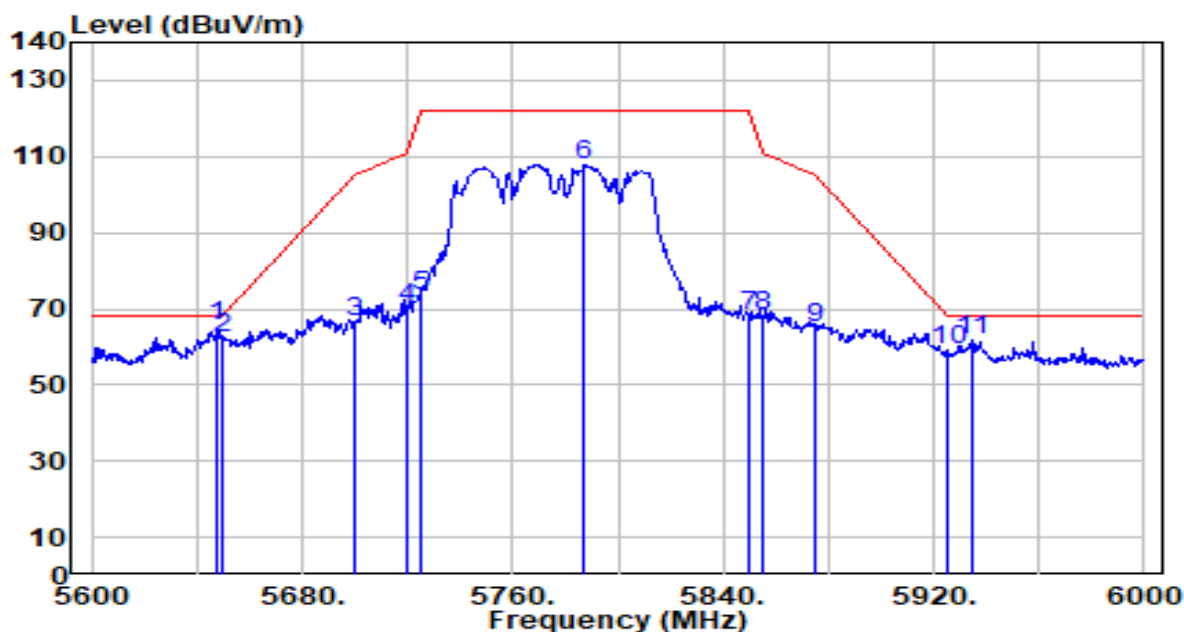


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5648.000	62.60	2.85	65.44	-2.76	68.20	216	339	Peak
2		5650.000	59.67	2.86	62.52	-5.68	68.20	216	339	Peak
3		5700.000	63.52	3.12	66.63	-38.57	105.20	216	339	Peak
4		5720.000	67.19	3.23	70.42	-40.38	110.80	216	339	Peak
5		5725.000	70.23	3.25	73.49	-48.71	122.20	216	339	Peak
6		5787.200	104.38	3.59	107.97	N/A	N/A	216	339	Peak
7		5850.000	64.39	3.63	68.02	-54.18	122.20	216	339	Peak
8		5855.000	64.48	3.63	68.10	-42.70	110.80	216	339	Peak
9		5875.000	61.63	3.61	65.24	-39.96	105.20	216	339	Peak
10		5925.000	55.64	3.59	59.24	-8.96	68.20	216	339	Peak
11		5934.400	58.05	3.59	61.64	-6.56	68.20	216	339	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-06-25
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-80MHz_TX_Band4_CH 155_ANT 6+7	Test Voltage	By Notebook PC

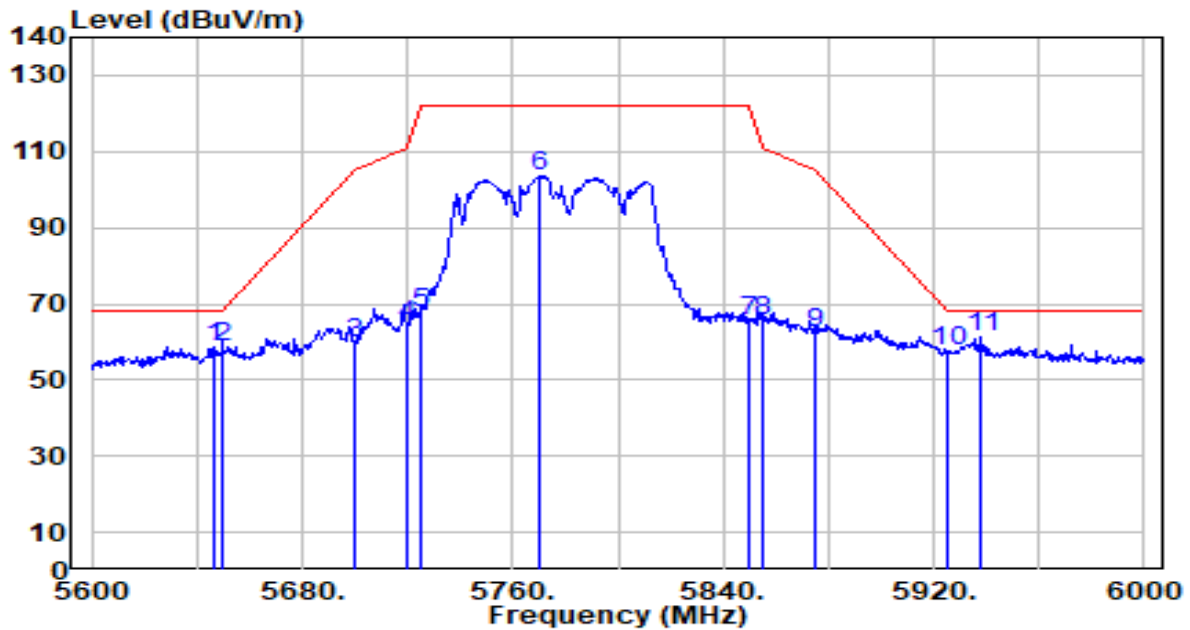


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5646.400	55.80	2.84	58.63	-9.57	68.20	167	68	Peak
2	5650.000	55.64	2.86	58.50	-9.70	68.20	167	68	Peak
3	5700.000	56.71	3.12	59.83	-45.37	105.20	167	68	Peak
4	5720.000	61.17	3.23	64.39	-46.41	110.80	167	68	Peak
5	5725.000	64.57	3.25	67.83	-54.37	122.20	167	68	Peak
6	5770.000	99.90	3.50	103.40	N/A	N/A	167	68	Peak
7	5850.000	61.95	3.63	65.58	-56.62	122.20	167	68	Peak
8	5855.000	61.65	3.63	65.28	-45.52	110.80	167	68	Peak
9	5875.000	58.68	3.61	62.29	-42.91	105.20	167	68	Peak
10	5925.000	54.23	3.59	57.82	-10.38	68.20	167	68	Peak
11	* 5938.000	57.84	3.59	61.43	-6.77	68.20	167	68	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-06-25
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-160MHz_TX_Band1,2_CH 50_ANT 6+7	Test Voltage	By Notebook PC

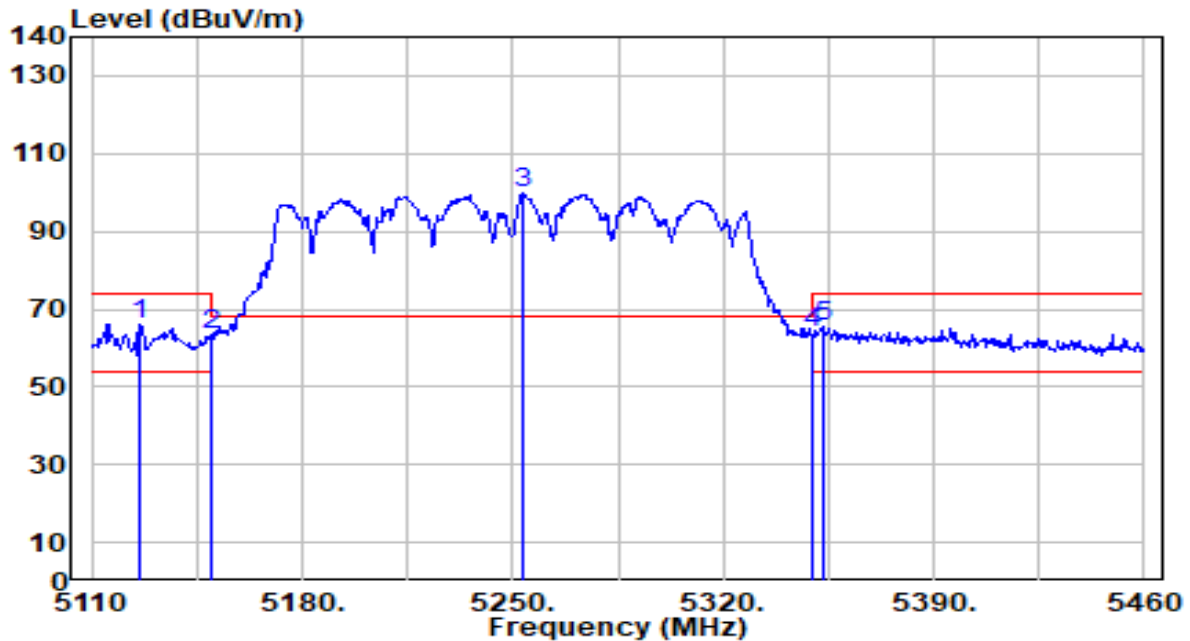


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5126.100	64.21	1.92	66.13	-7.87	74.00	196	147	Peak
2		5150.000	61.26	1.94	63.20	-10.80	74.00	196	147	Peak
3		5253.150	97.72	1.94	99.66	N/A	N/A	196	147	Peak
4		5350.000	62.26	1.90	64.17	-9.83	74.00	196	147	Peak
5		5353.250	63.54	1.90	65.44	-8.56	74.00	196	147	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-06-25
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-160MHz_TX_Band1,2_CH 50_ANT 6+7	Test Voltage	By Notebook PC

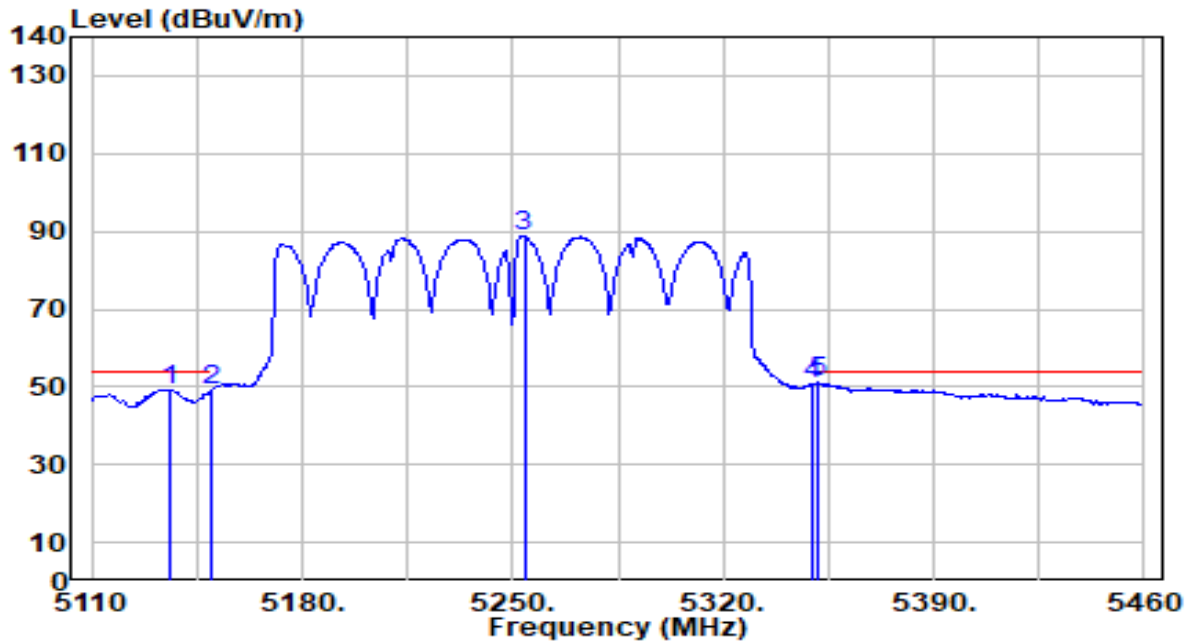


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5135.900	47.37	1.93	49.29	-4.71	54.00	196	147	Average
2	5150.000	47.38	1.94	49.31	-4.69	54.00	196	147	Average
3	5253.850	86.84	1.94	88.79	N/A	N/A	196	147	Average
4	5350.000	49.04	1.90	50.94	-3.06	54.00	196	147	Average
5	* 5351.150	49.20	1.90	51.11	-2.89	54.00	196	147	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-06-25
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-160MHz_TX_Band1,2_CH 50_ANT 6+7	Test Voltage	By Notebook PC

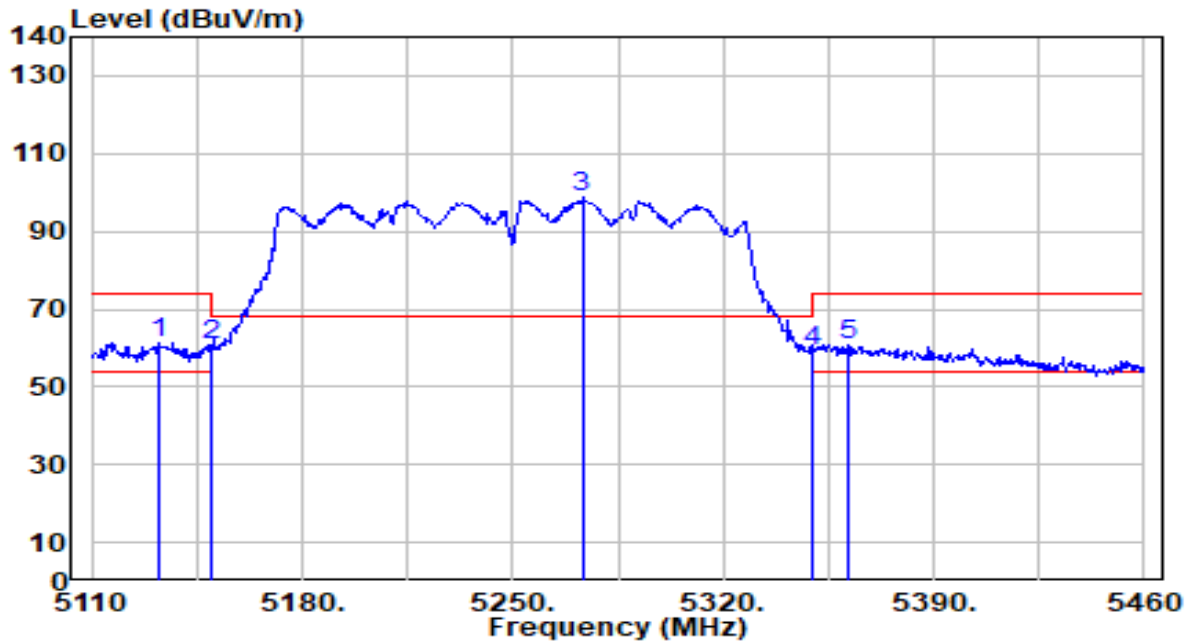


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5132.400	59.54	1.92	61.47	-12.53	74.00	252	55	Peak
2		5150.000	58.79	1.94	60.72	-13.28	74.00	252	55	Peak
3		5273.100	96.73	1.93	98.66	N/A	N/A	252	55	Peak
4		5350.000	57.17	1.90	59.07	-14.93	74.00	252	55	Peak
5		5362.000	59.11	1.90	61.01	-12.99	74.00	252	55	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-06-25
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-160MHz_TX_Band1,2_CH 50_ANT 6+7	Test Voltage	By Notebook PC

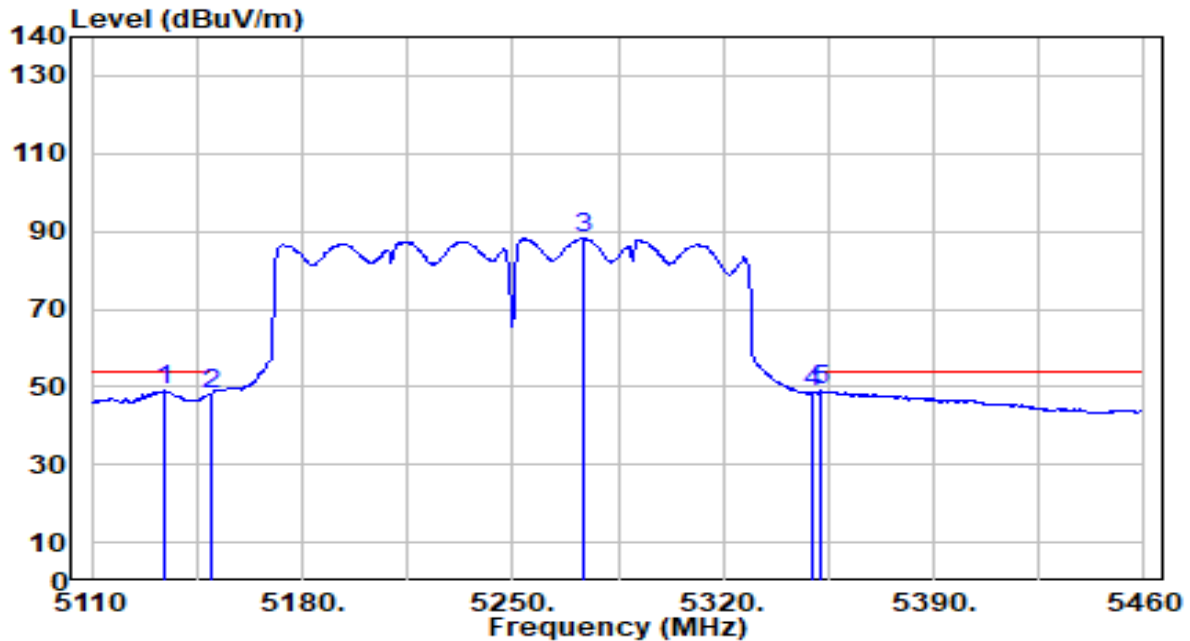


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5133.800	46.98	1.93	48.91	-5.09	54.00	252	55	Average
2	5150.000	46.38	1.94	48.32	-5.68	54.00	252	55	Average
3	5273.450	86.15	1.93	88.09	N/A	N/A	252	55	Average
4	5350.000	46.51	1.90	48.41	-5.59	54.00	252	55	Average
5	* 5352.200	47.15	1.90	49.05	-4.95	54.00	252	55	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-160MHz_TX_Band3_CH 114_ANT 6+7	Test Voltage	By Notebook PC

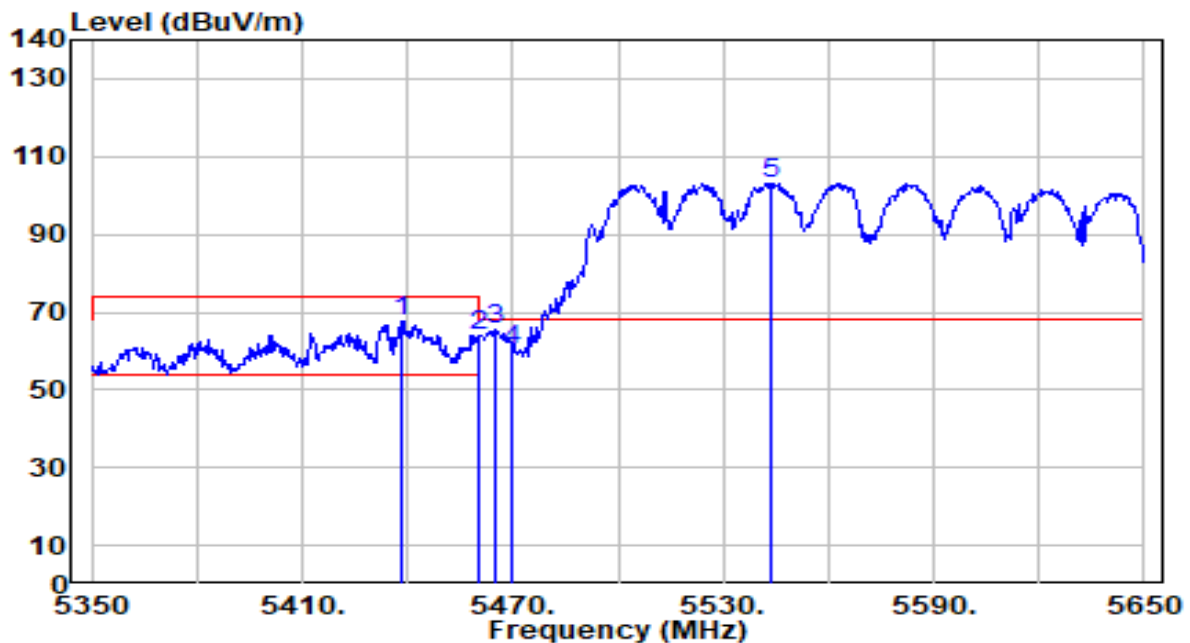

No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5438.500	65.79	2.01	67.80	-6.20	74.00	198	345	Peak
2	5460.000	61.83	2.07	63.90	-10.10	74.00	198	345	Peak
3	* 5464.900	63.45	2.09	65.54	-2.66	68.20	198	345	Peak
4	5470.000	58.28	2.11	60.38	-7.82	68.20	198	345	Peak
5	5543.500	100.82	2.37	103.19	N/A	N/A	198	345	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.