


EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-160MHz_TX_Band3_CH 114_ANT 6+7	Test Voltage	By Notebook PC

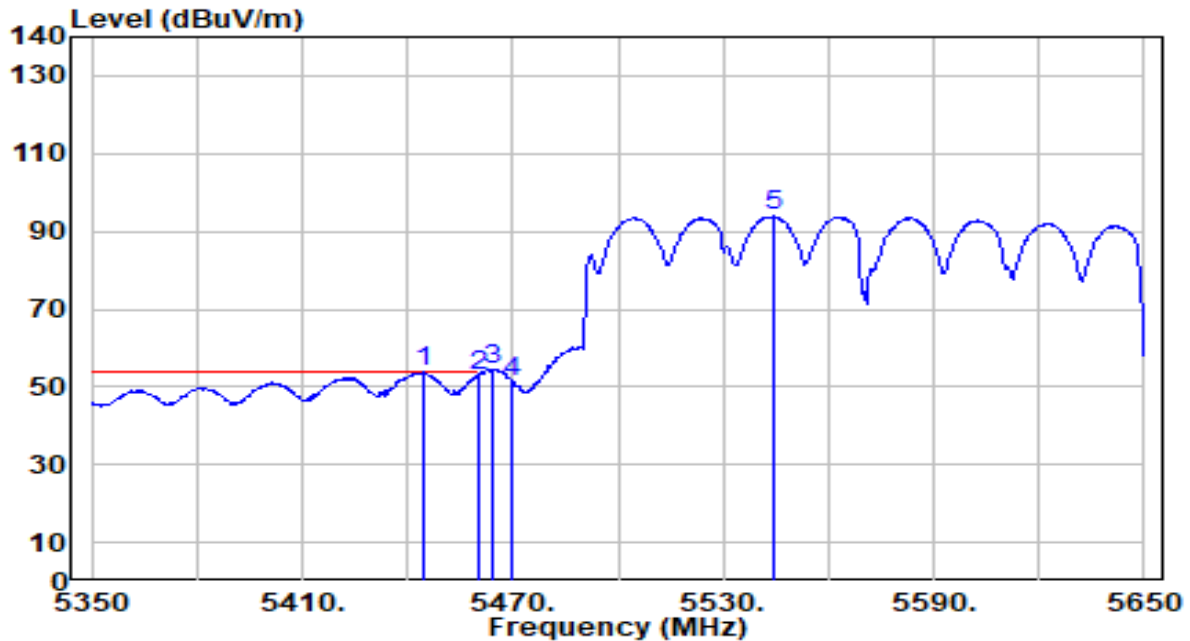


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5444.500	51.61	2.03	53.63	-0.37	54.00	198	345	Average
2		5460.000	50.93	2.07	53.00	-1.00	54.00	198	345	Average
3		5464.000	52.36	2.09	54.45	N/A	N/A	198	345	Average
4		5470.000	49.22	2.11	51.33	N/A	N/A	198	345	Average
5		5544.100	91.50	2.37	93.87	N/A	N/A	198	345	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-160MHz_TX_Band3_CH 114_ANT 6+7	Test Voltage	By Notebook PC

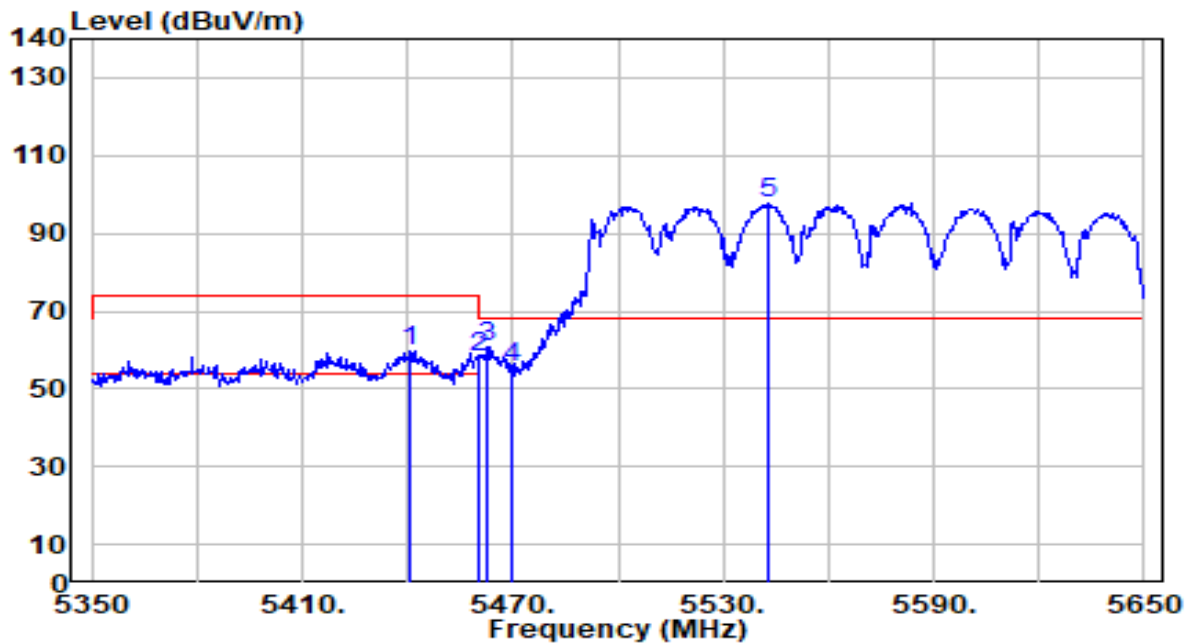


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5440.600	57.84	2.01	59.85	-14.15	74.00	100	322	Peak
2	5460.000	55.83	2.07	57.91	-16.09	74.00	100	322	Peak
3	* 5462.800	58.55	2.08	60.63	-7.57	68.20	100	322	Peak
4	5470.000	53.50	2.11	55.61	-12.59	68.20	100	322	Peak
5	5542.900	95.11	2.37	97.48	N/A	N/A	100	322	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-160MHz_TX_Band3_CH 114_ANT 6+7	Test Voltage	By Notebook PC

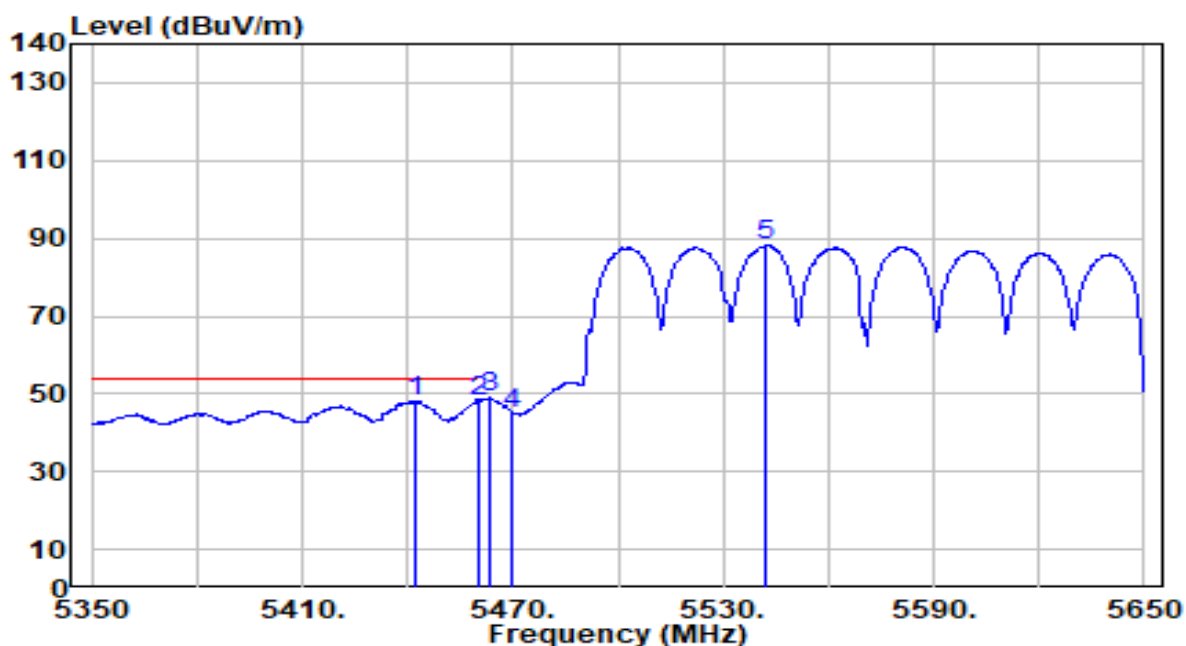


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5442.100	46.11	2.02	48.13	-5.87	54.00	100	322	Average
2	*	5460.000	46.06	2.07	48.13	-5.87	54.00	100	322	Average
3		5463.100	46.93	2.08	49.01	N/A	N/A	100	322	Average
4		5470.000	43.06	2.11	45.17	N/A	N/A	100	322	Average
5		5542.300	85.78	2.37	88.15	N/A	N/A	100	322	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band1_CH 36_ANT 6+7	Test Voltage	By Notebook PC

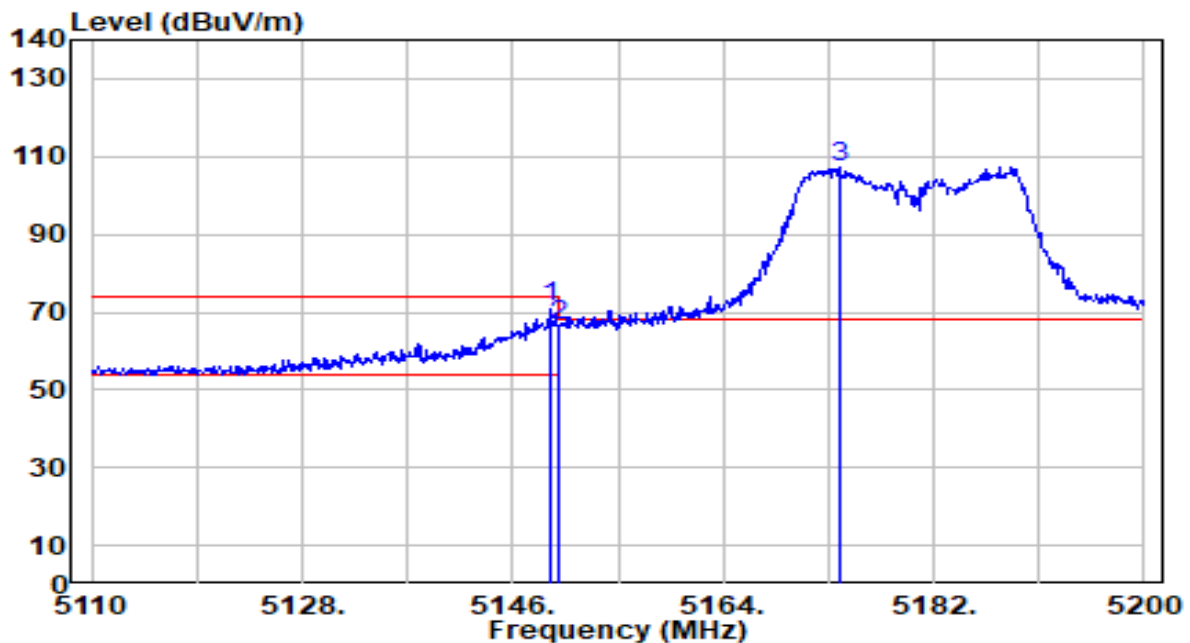


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.150	69.13	1.94	71.06	-2.94	74.00	202	291	Peak
2		5150.000	64.48	1.94	66.42	-7.58	74.00	202	291	Peak
3		5173.900	105.30	1.95	107.26	N/A	N/A	202	291	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band1_CH 36_ANT 6+7	Test Voltage	By Notebook PC

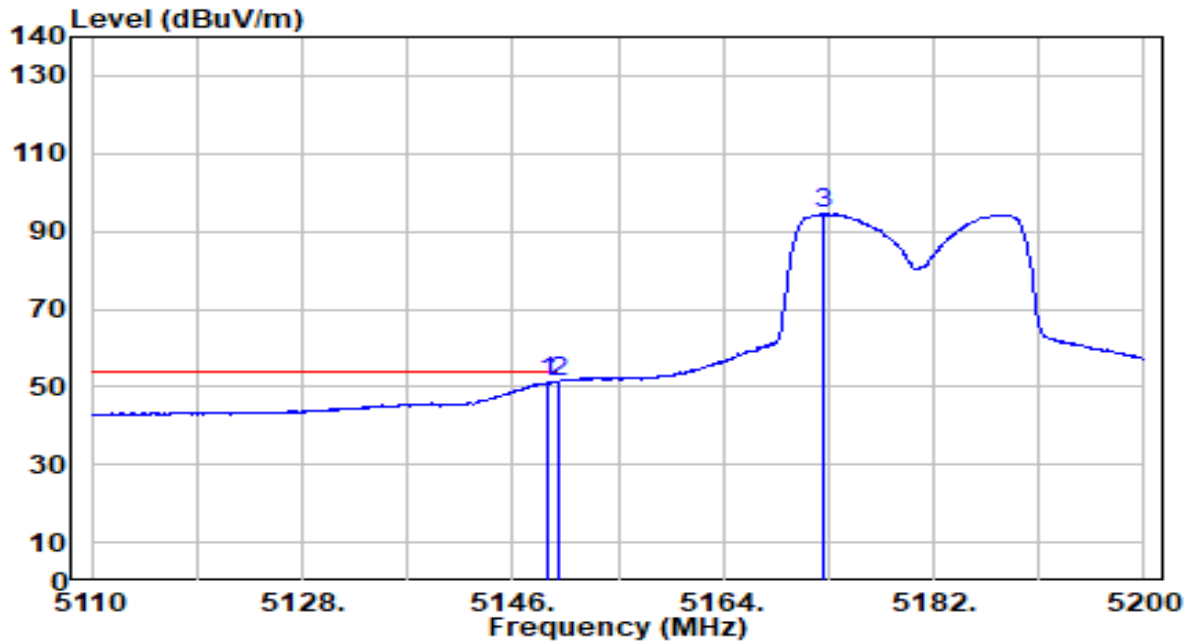


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5149.060	49.29	1.94	51.23	-2.77	54.00	202	291	Average
2	*	5150.000	49.57	1.94	51.50	-2.50	54.00	202	291	Average
3		5172.640	92.52	1.95	94.47	N/A	N/A	202	291	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band1_CH 36_ANT 6+7	Test Voltage	By Notebook PC

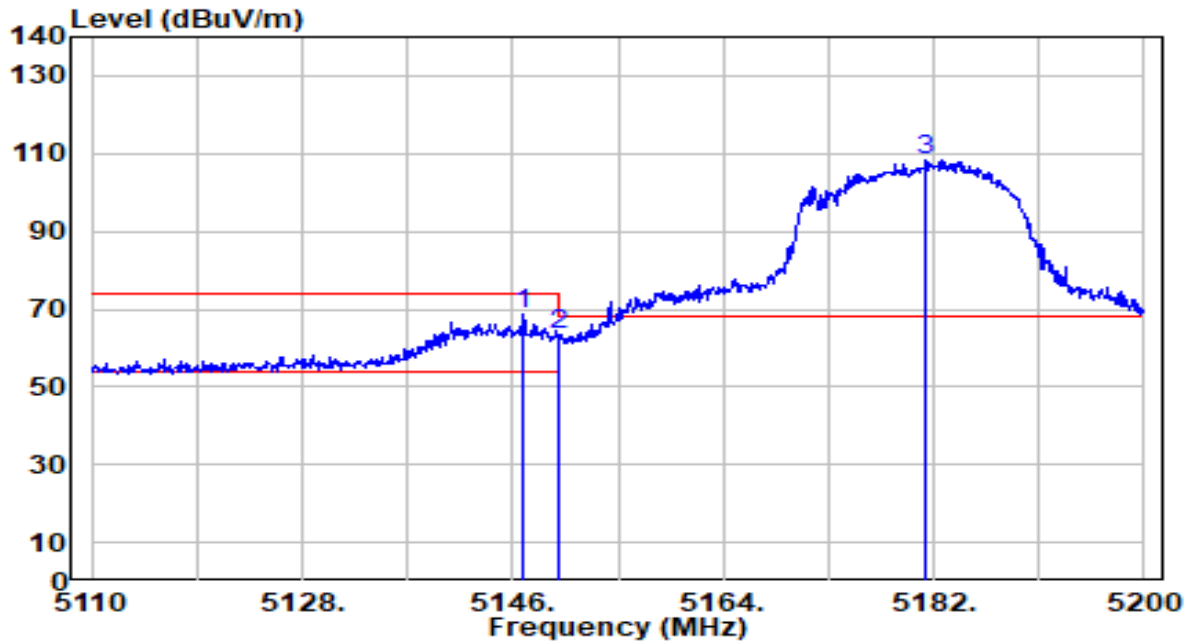


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5146.900	66.88	1.93	68.81	-5.19	74.00	195	278	Peak
2		5150.000	61.64	1.94	63.58	-10.42	74.00	195	278	Peak
3		5181.370	106.19	1.96	108.15	N/A	N/A	195	278	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band1_CH 36_ANT 6+7	Test Voltage	By Notebook PC

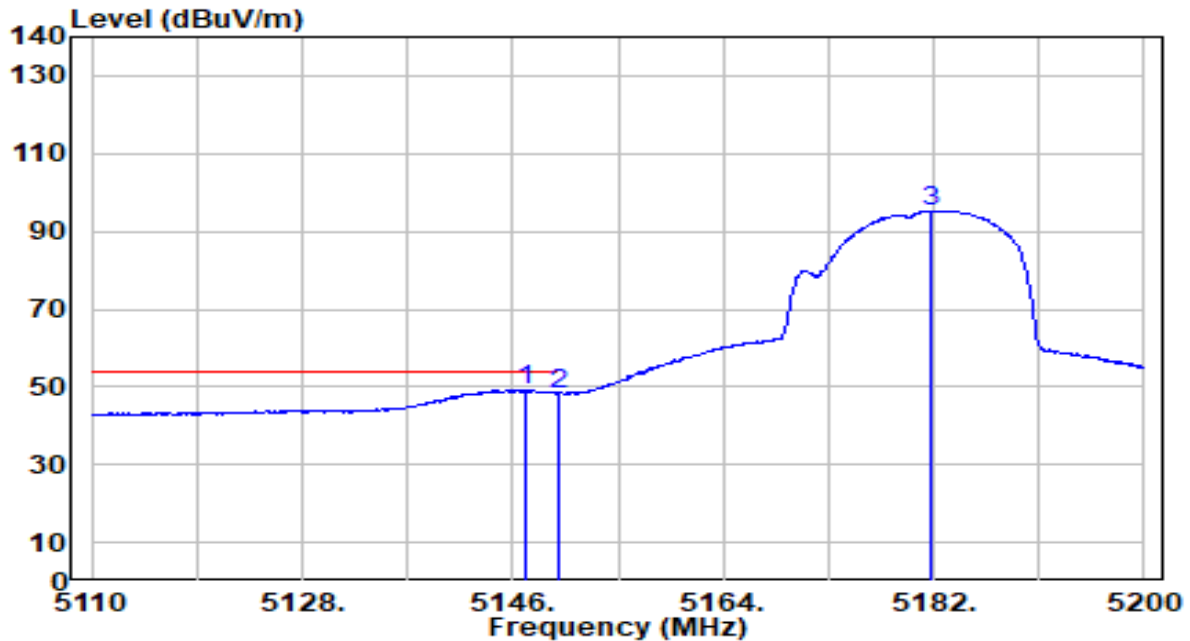


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.080	47.25	1.93	49.19	-4.81	54.00	195	278	Average
2		5150.000	46.39	1.94	48.32	-5.68	54.00	195	278	Average
3		5181.730	93.38	1.96	95.33	N/A	N/A	195	278	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band2_CH 64_ANT 6+7	Test Voltage	By Notebook PC

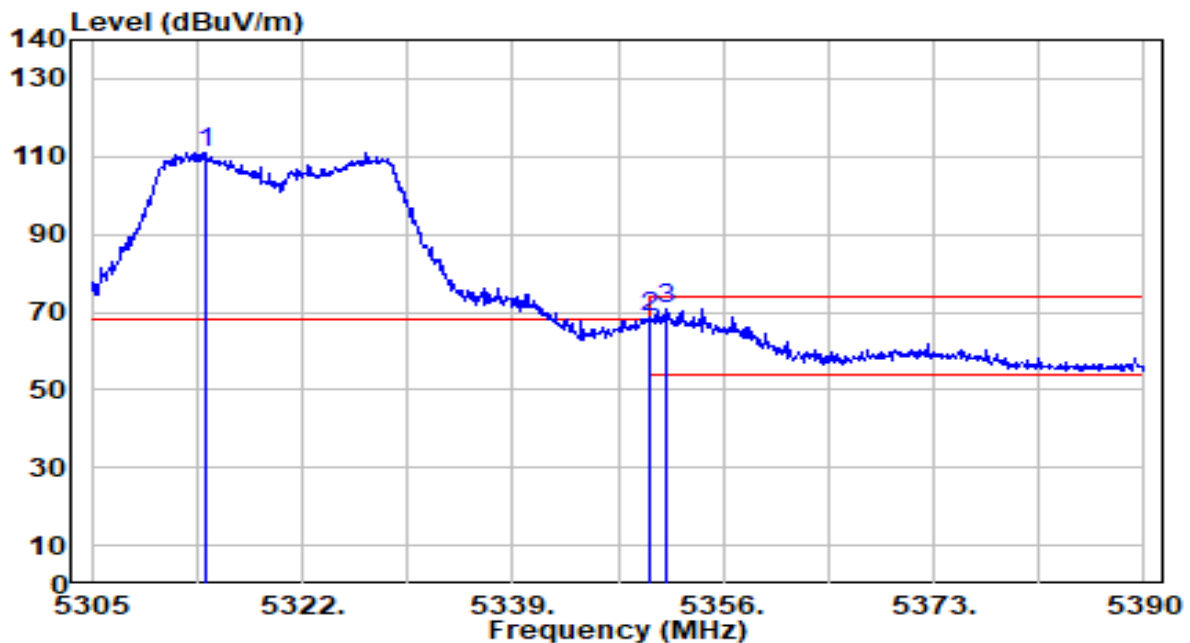


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5314.265	109.27	1.92	111.19	N/A	N/A	184	322	Peak
2	5350.000	66.92	1.90	68.83	-5.17	74.00	184	322	Peak
3	* 5351.410	69.11	1.90	71.02	-2.98	74.00	184	322	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band2_CH 64_ANT 6+7	Test Voltage	By Notebook PC

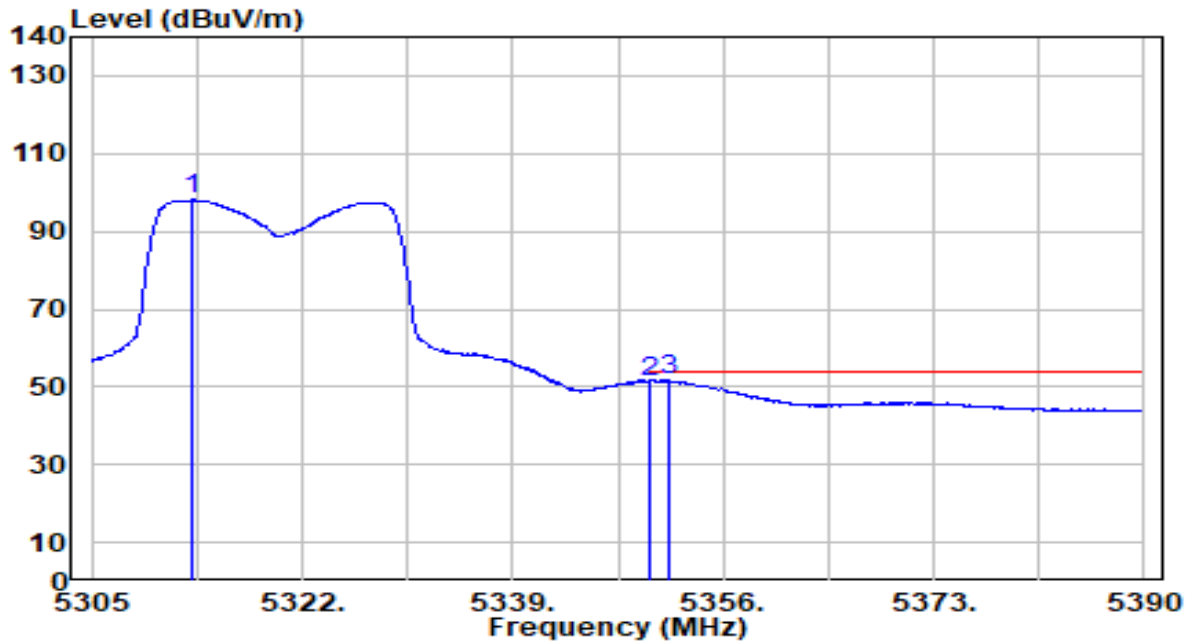


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5313.075	96.16	1.92	98.08	N/A	N/A	184	322	Average
2	5350.000	49.53	1.90	51.43	-2.57	54.00	184	322	Average
3	* 5351.665	49.77	1.90	51.68	-2.32	54.00	184	322	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band2_CH 64_ANT 6+7	Test Voltage	By Notebook PC

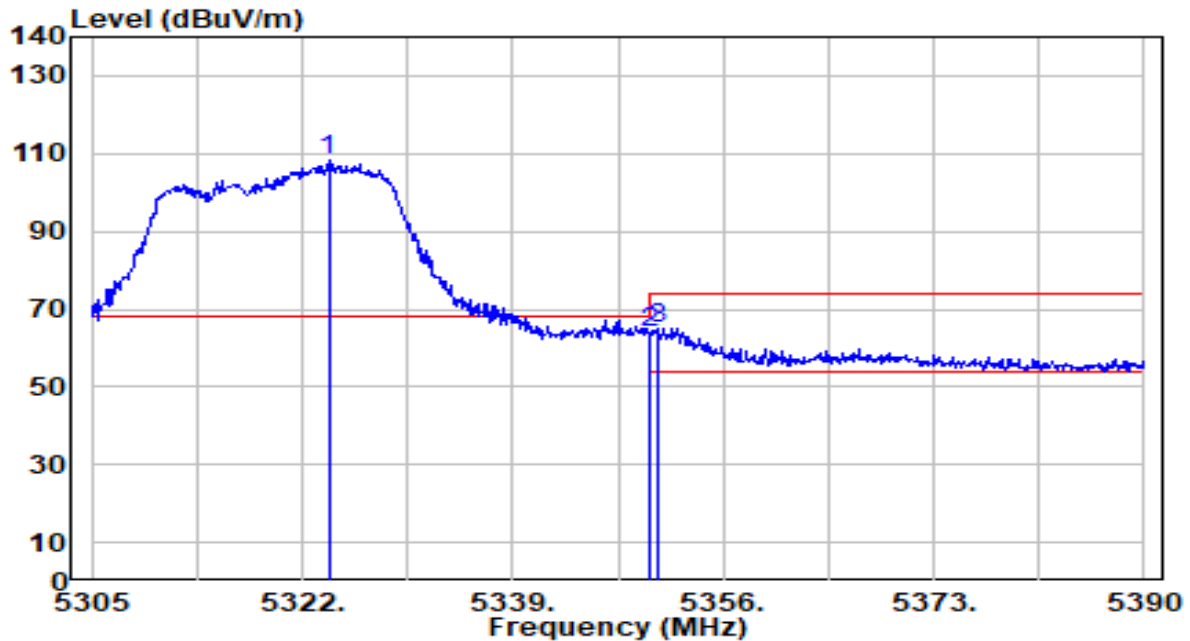


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5324.125	106.43	1.91	108.34	N/A	N/A	230	285	Peak
2	5350.000	61.90	1.90	63.80	-10.20	74.00	230	285	Peak
3	* 5350.815	63.15	1.90	65.05	-8.95	74.00	230	285	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band2_CH 64_ANT 6+7	Test Voltage	By Notebook PC

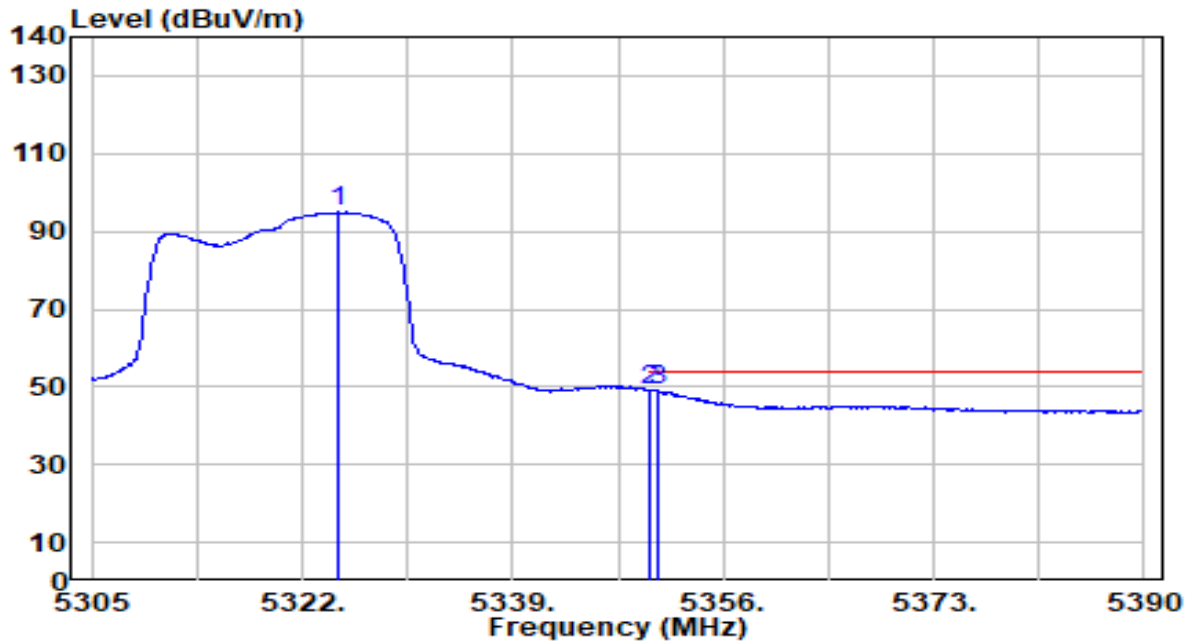


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5324.805	93.03	1.91	94.94	N/A	N/A	230	285	Average
2	* 5350.000	47.39	1.90	49.29	-4.71	54.00	230	285	Average
3	5350.645	47.09	1.90	49.00	-5.00	54.00	230	285	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band3_CH 100_ANT 6+7	Test Voltage	By Notebook PC

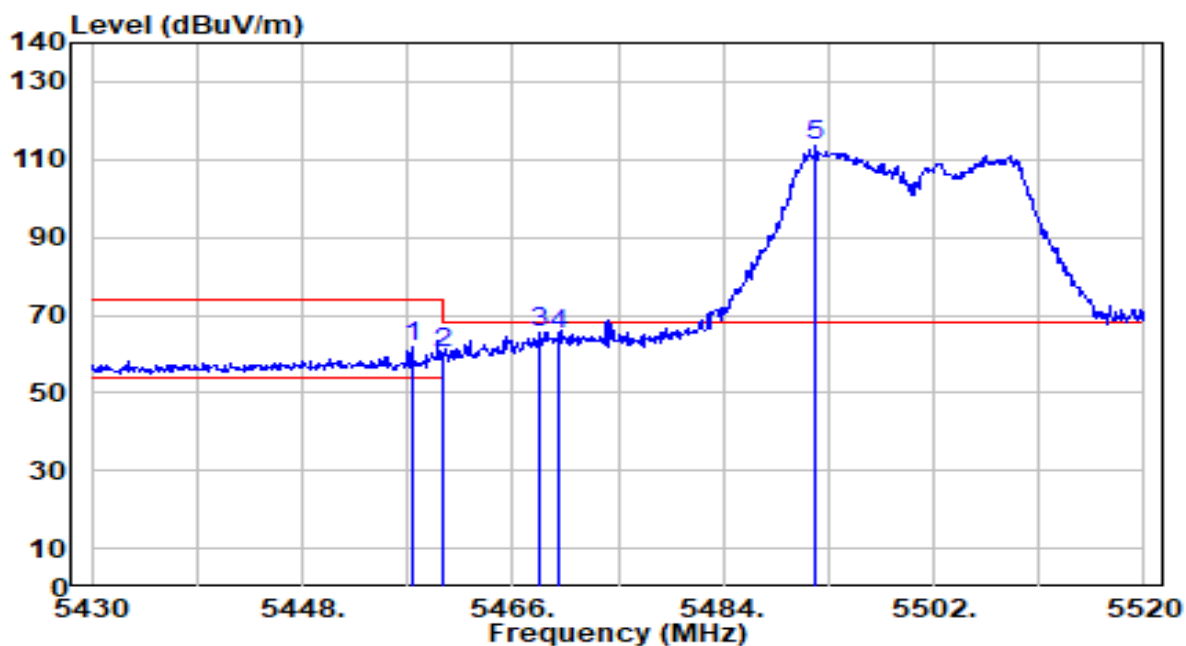


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5457.360	59.94	2.07	62.00	-12.00	74.00	166	346	Peak
2	5460.000	58.40	2.07	60.47	-13.53	74.00	166	346	Peak
3	* 5468.340	63.65	2.10	65.75	-2.45	68.20	166	346	Peak
4	5470.000	62.61	2.11	64.72	-3.48	68.20	166	346	Peak
5	5491.830	111.43	2.17	113.60	N/A	N/A	166	346	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band3_CH 100_ANT 6+7	Test Voltage	By Notebook PC

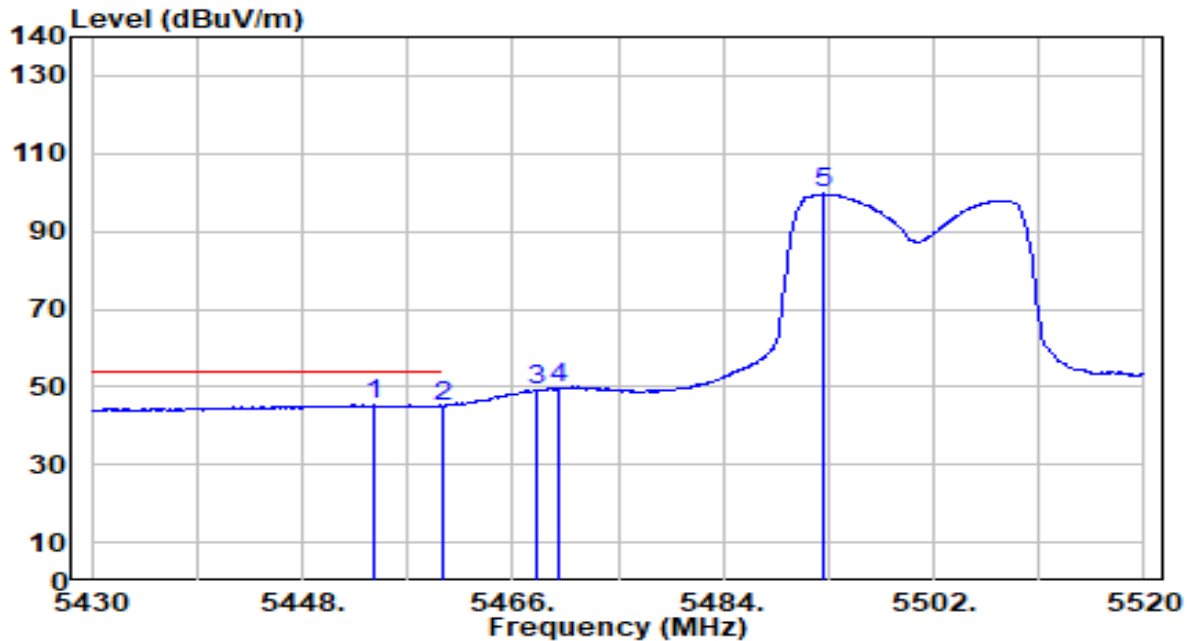


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5454.210	43.24	2.06	45.29	-8.71	54.00	166	346	Average
2		5460.000	43.06	2.07	45.13	-8.87	54.00	166	346	Average
3		5468.160	47.16	2.10	49.26	N/A	N/A	166	346	Average
4		5470.000	47.73	2.11	49.84	N/A	N/A	166	346	Average
5		5492.460	97.42	2.18	99.59	N/A	N/A	166	346	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band3_CH 100_ANT 6+7	Test Voltage	By Notebook PC

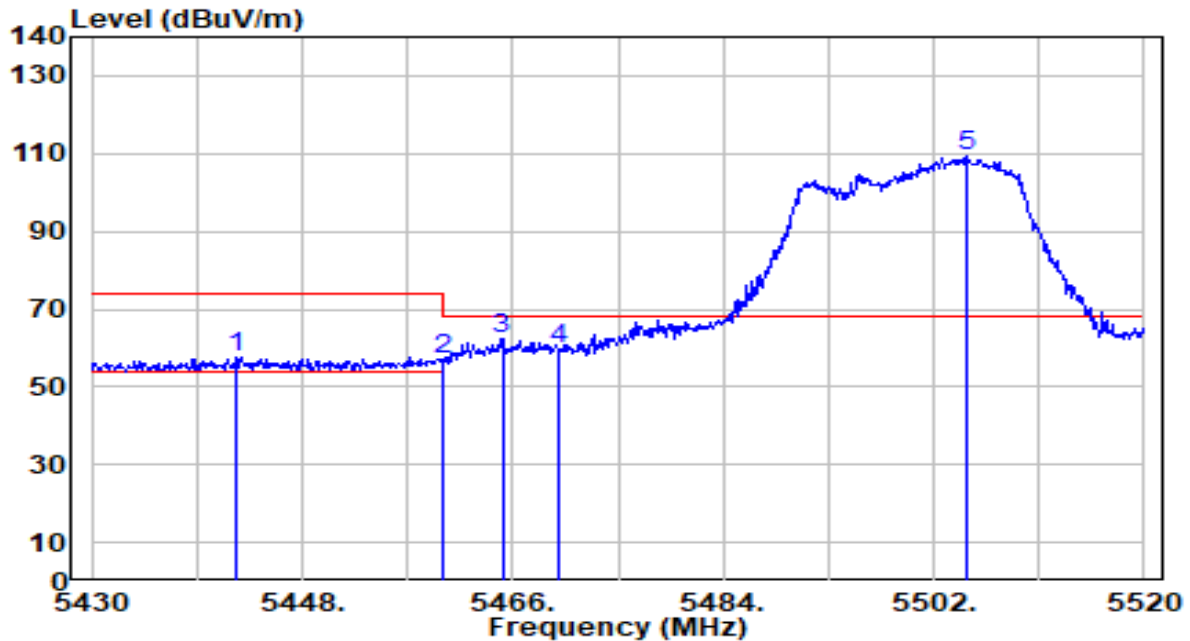


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5442.240	55.43	2.02	57.45	-16.55	74.00	274	84	Peak
2	5460.000	54.97	2.07	57.05	-16.95	74.00	274	84	Peak
3	* 5465.100	60.23	2.09	62.32	-5.88	68.20	274	84	Peak
4	5470.000	57.85	2.11	59.95	-8.25	68.20	274	84	Peak
5	5504.880	107.25	2.22	109.47	N/A	N/A	274	84	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band3_CH 100_ANT 6+7	Test Voltage	By Notebook PC

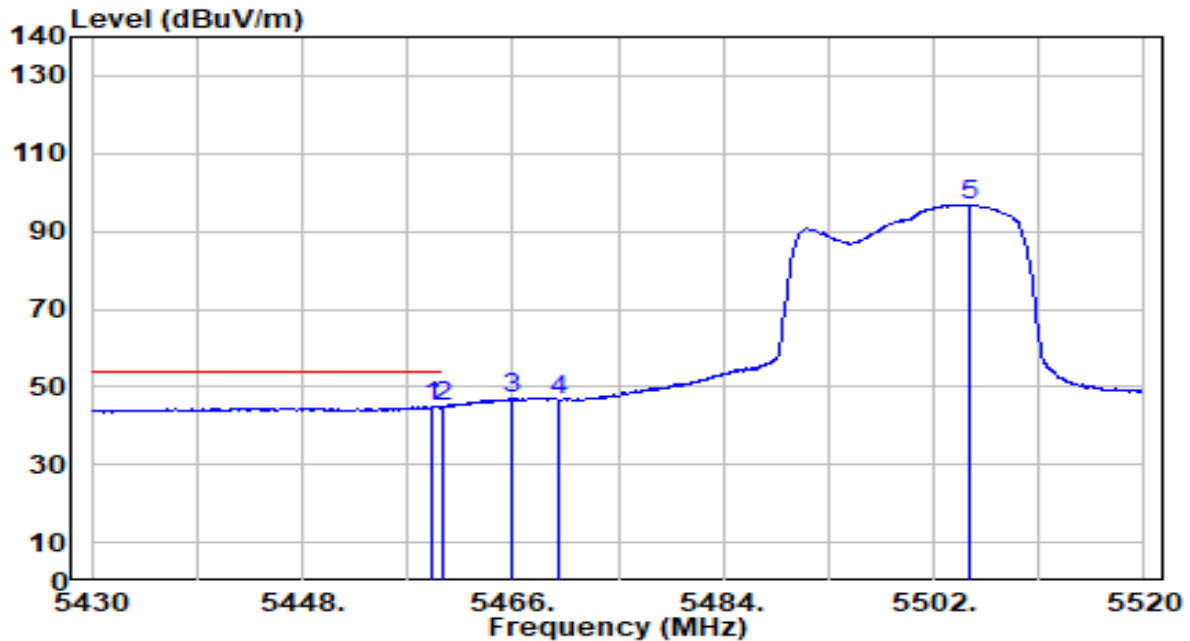


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5458.980	42.78	2.07	44.85	-9.15	54.00	274	84	Average
2	*	5460.000	42.87	2.07	44.95	-9.05	54.00	274	84	Average
3		5465.820	44.71	2.09	46.81	N/A	N/A	274	84	Average
4		5470.000	44.62	2.11	46.72	N/A	N/A	274	84	Average
5		5505.060	94.53	2.22	96.75	N/A	N/A	274	84	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band3_CH 140_ANT 6+7	Test Voltage	By Notebook PC

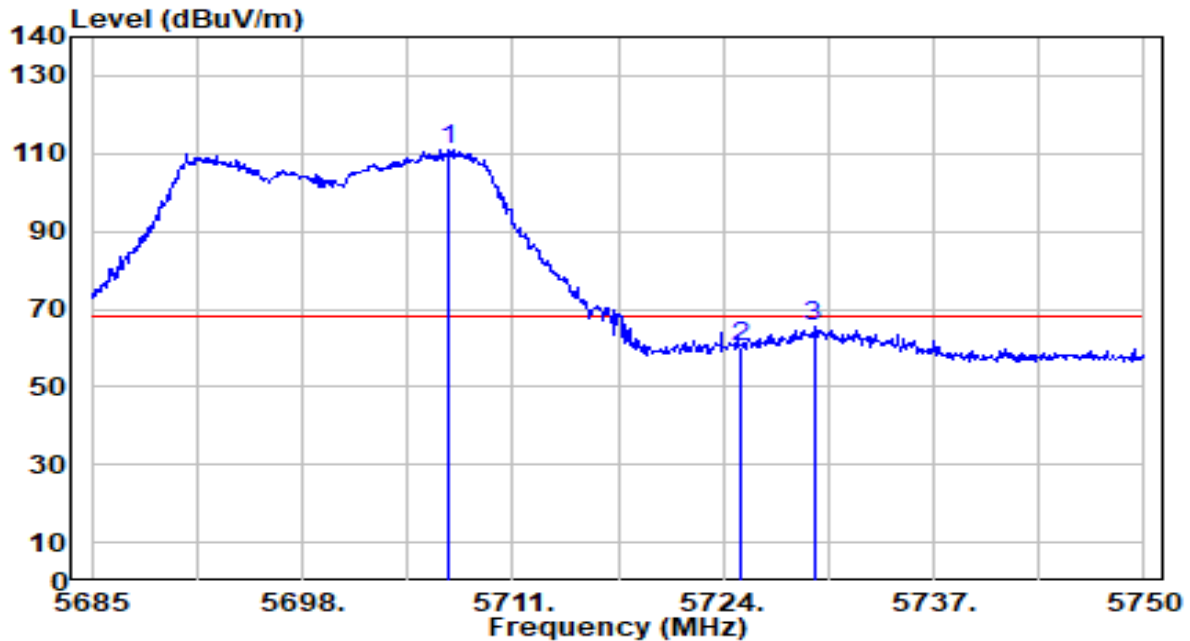


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5707.100	108.02	3.16	111.18	N/A	N/A	155	337	Peak
2	5725.000	57.14	3.25	60.39	-7.81	68.20	155	337	Peak
3	* 5729.590	62.09	3.28	65.37	-2.83	68.20	155	337	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band3_CH 140_ANT 6+7	Test Voltage	By Notebook PC

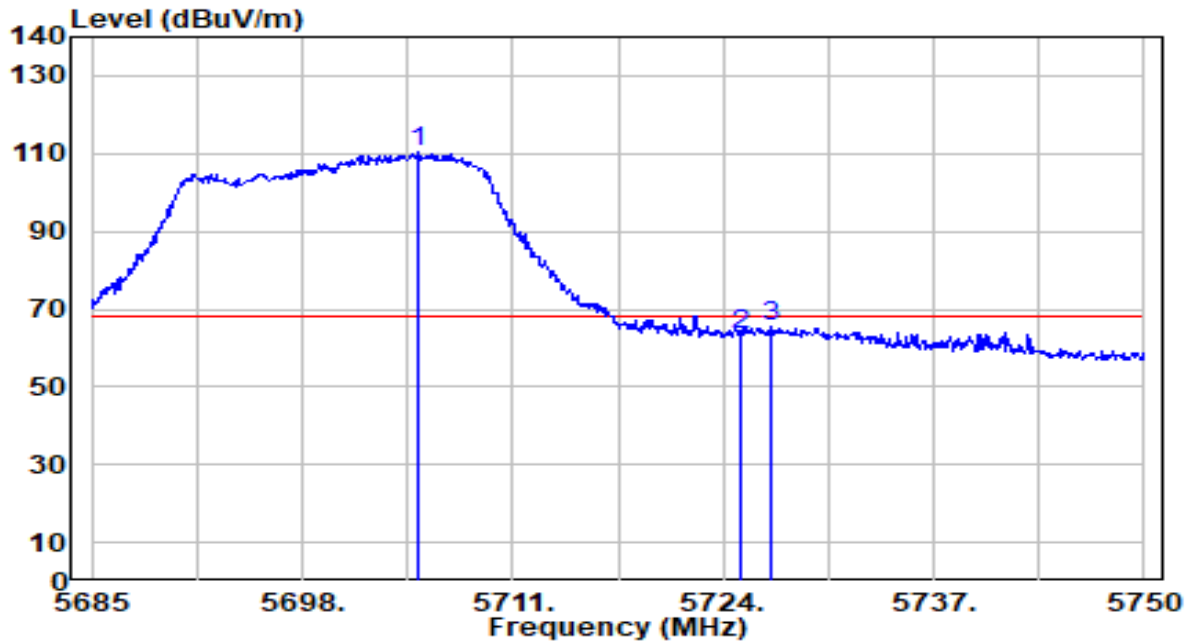


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5705.150	107.29	3.15	110.44	N/A	N/A	263	60	Peak
2	5725.000	60.12	3.25	63.37	-4.83	68.20	263	60	Peak
3	* 5726.990	62.51	3.26	65.77	-2.43	68.20	263	60	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-06-25
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band4_CH 149_ANT 6+7	Test Voltage	By Notebook PC

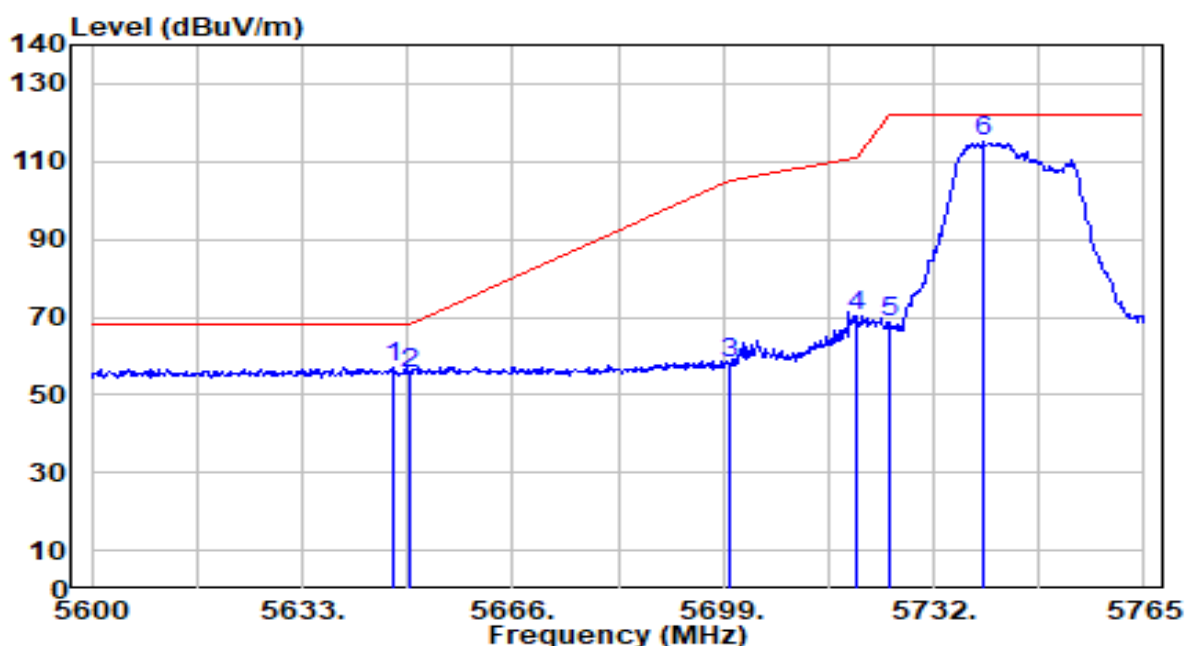


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5647.190	54.32	2.84	57.16	-11.04	68.20	200	0	Peak
2		5650.000	52.54	2.86	55.40	-12.80	68.20	200	0	Peak
3		5700.000	55.13	3.12	58.24	-46.96	105.20	200	0	Peak
4		5720.000	66.97	3.23	70.19	-40.61	110.80	200	0	Peak
5		5725.000	65.16	3.25	68.42	-53.78	122.20	200	0	Peak
6		5739.590	111.95	3.33	115.28	N/A	N/A	200	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-06-25
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band4_CH 149_ANT 6+7	Test Voltage	By Notebook PC

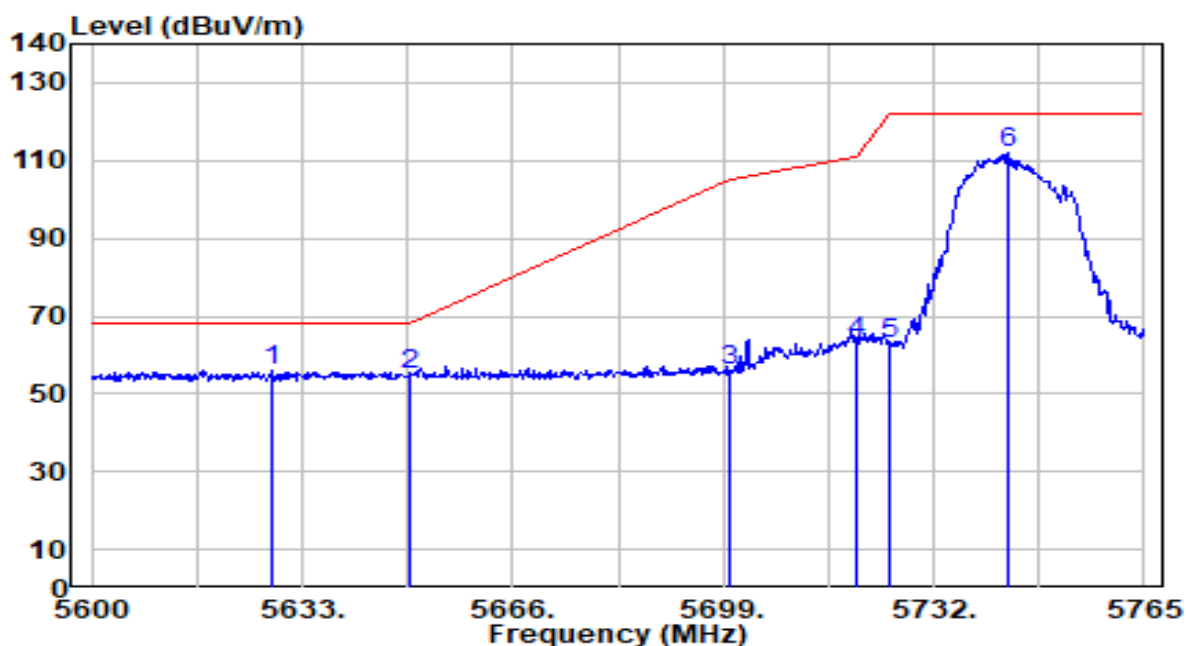


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5628.380	53.47	2.74	56.22	-11.98	68.20	200	63	Peak
2		5650.000	52.21	2.86	55.07	-13.13	68.20	200	63	Peak
3		5700.000	52.74	3.12	55.86	-49.34	105.20	200	63	Peak
4		5720.000	60.34	3.23	63.57	-47.23	110.80	200	63	Peak
5		5725.000	59.70	3.25	62.96	-59.24	122.20	200	63	Peak
6		5743.550	108.51	3.35	111.86	N/A	N/A	200	63	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-06-25
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band4_CH 165_ANT 6+7	Test Voltage	By Notebook PC

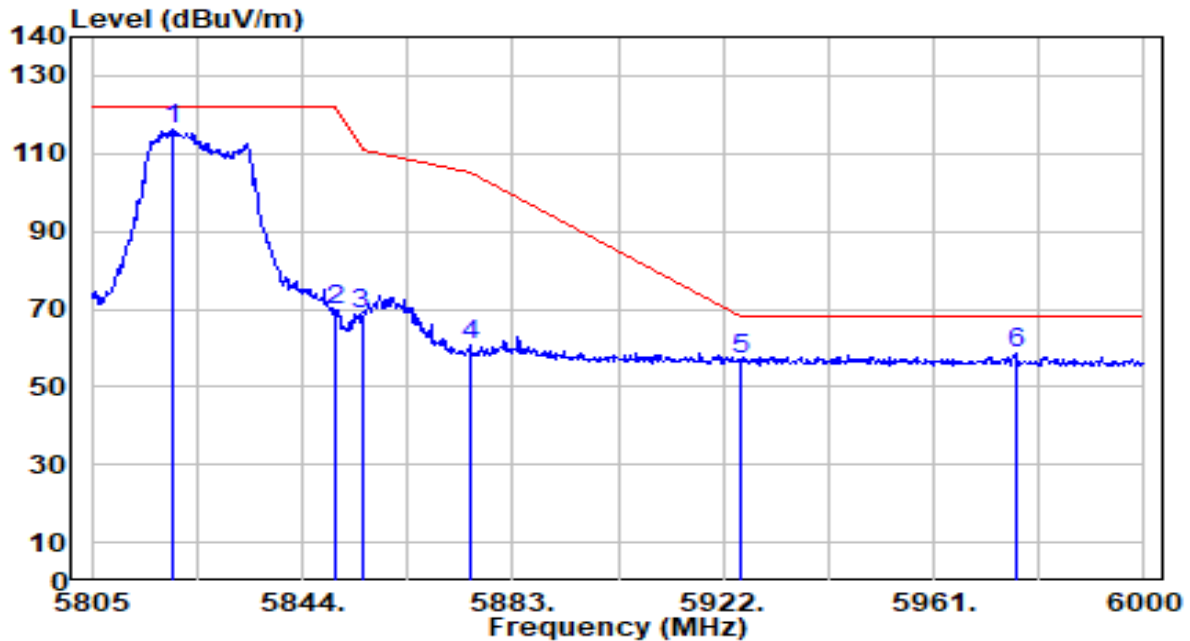


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5819.820	112.57	3.65	116.22	N/A	N/A	178	360	Peak
2	5850.000	65.85	3.63	69.48	-52.72	122.20	178	360	Peak
3	5855.000	64.98	3.63	68.61	-42.19	110.80	178	360	Peak
4	5875.000	56.88	3.61	60.49	-44.71	105.20	178	360	Peak
5	5925.000	53.58	3.59	57.18	-11.02	68.20	178	360	Peak
6	* 5976.210	54.90	3.58	58.48	-9.72	68.20	178	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-06-25
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band4_CH 165_ANT 6+7	Test Voltage	By Notebook PC

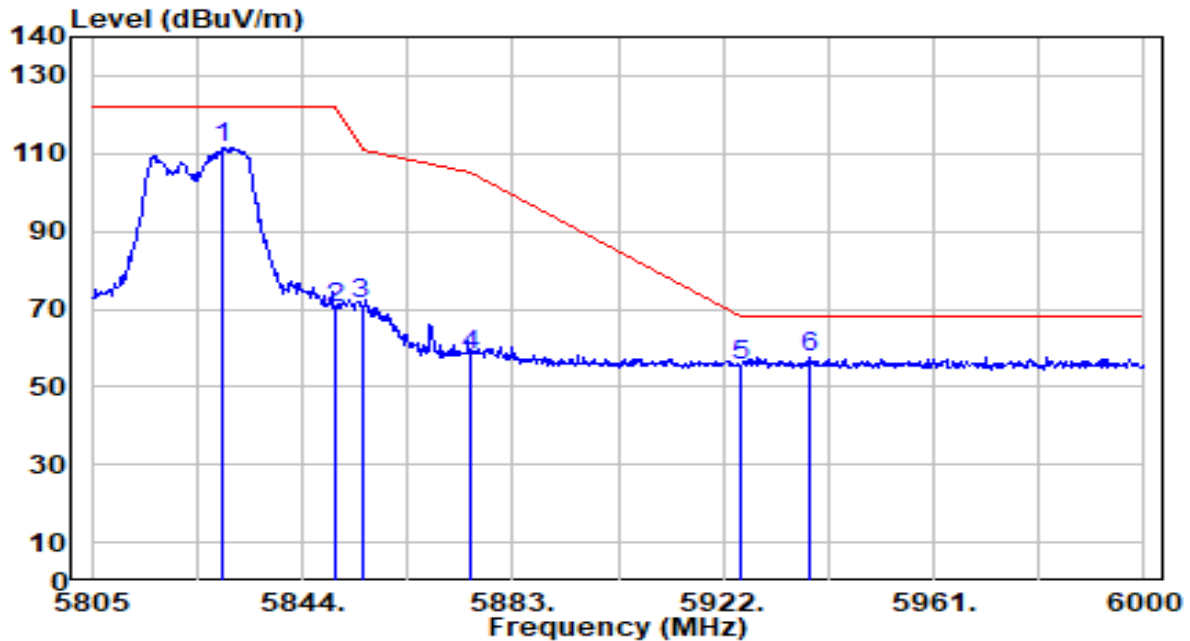


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5828.985	108.00	3.64	111.64	N/A	N/A	304	89	Peak
2	5850.000	66.67	3.63	70.30	-51.90	122.20	304	89	Peak
3	5855.000	67.72	3.63	71.35	-39.45	110.80	304	89	Peak
4	5875.000	54.53	3.61	58.14	-47.06	105.20	304	89	Peak
5	5925.000	51.98	3.59	55.57	-12.63	68.20	304	89	Peak
6	* 5938.185	54.10	3.59	57.69	-10.51	68.20	304	89	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-40MHz_TX_Band1_CH 38_ANT 6+7	Test Voltage	By Notebook PC

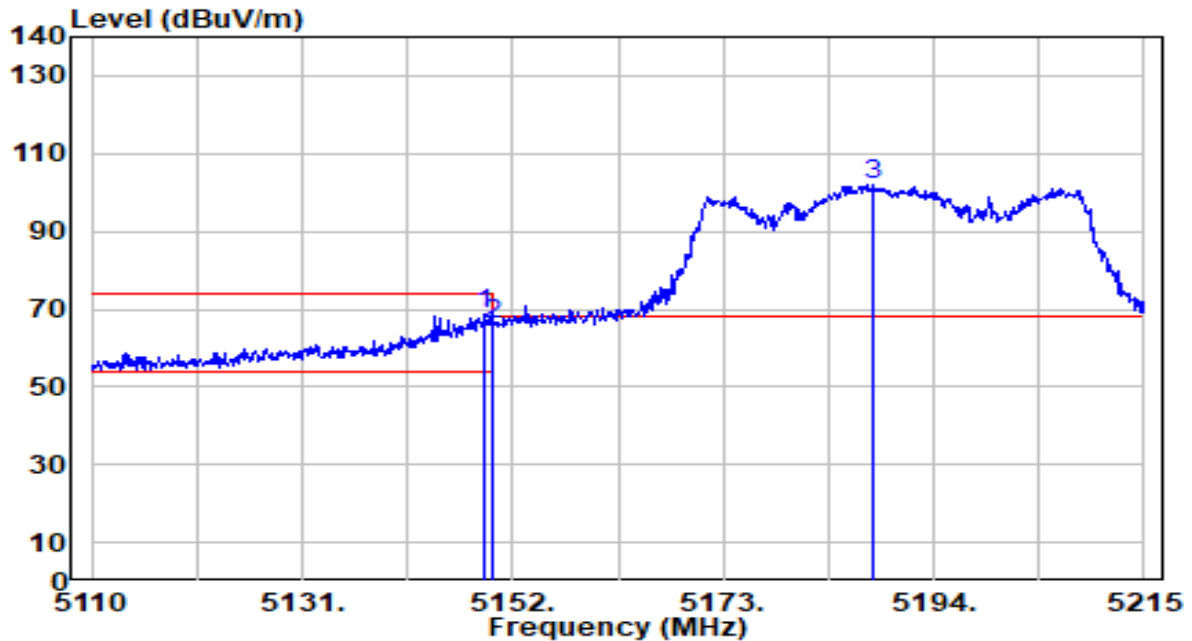


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.270	66.59	1.94	68.52	-5.48	74.00	139	99	Peak
2		5150.000	64.17	1.94	66.10	-7.90	74.00	139	99	Peak
3		5188.015	100.08	1.96	102.04	N/A	N/A	139	99	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-40MHz_TX_Band1_CH 38_ANT 6+7	Test Voltage	By Notebook PC

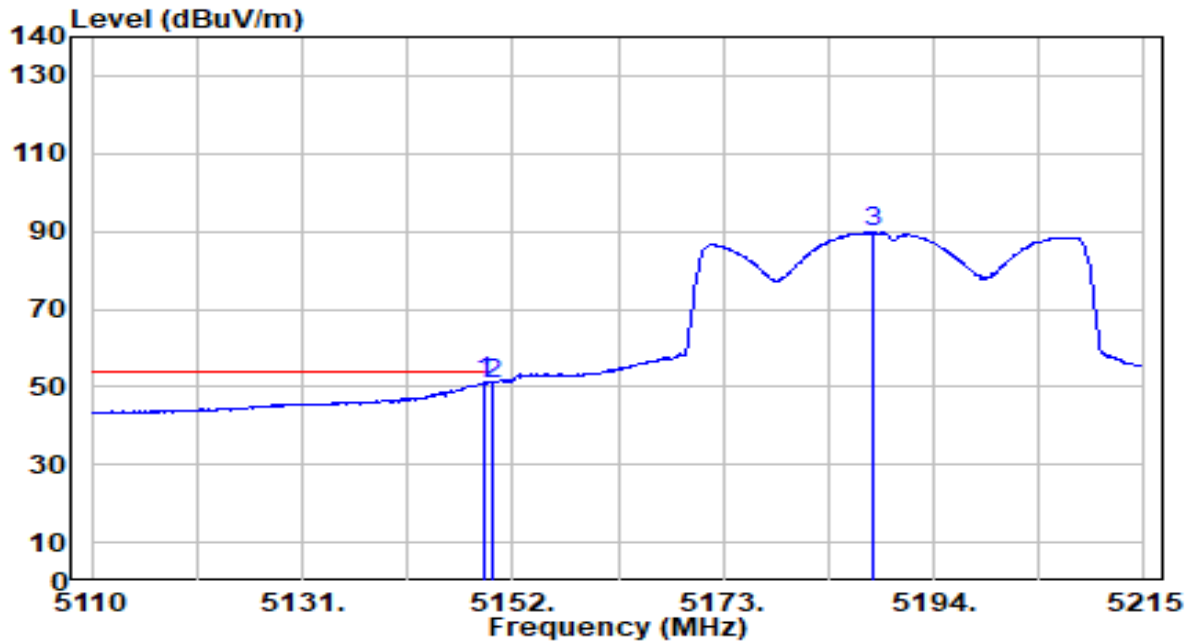


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.060	49.08	1.94	51.02	-2.98	54.00	139	99	Average
2		5150.000	48.98	1.94	50.92	-3.08	54.00	139	99	Average
3		5187.910	87.71	1.96	89.67	N/A	N/A	139	99	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-40MHz_TX_Band1_CH 38_ANT 6+7	Test Voltage	By Notebook PC

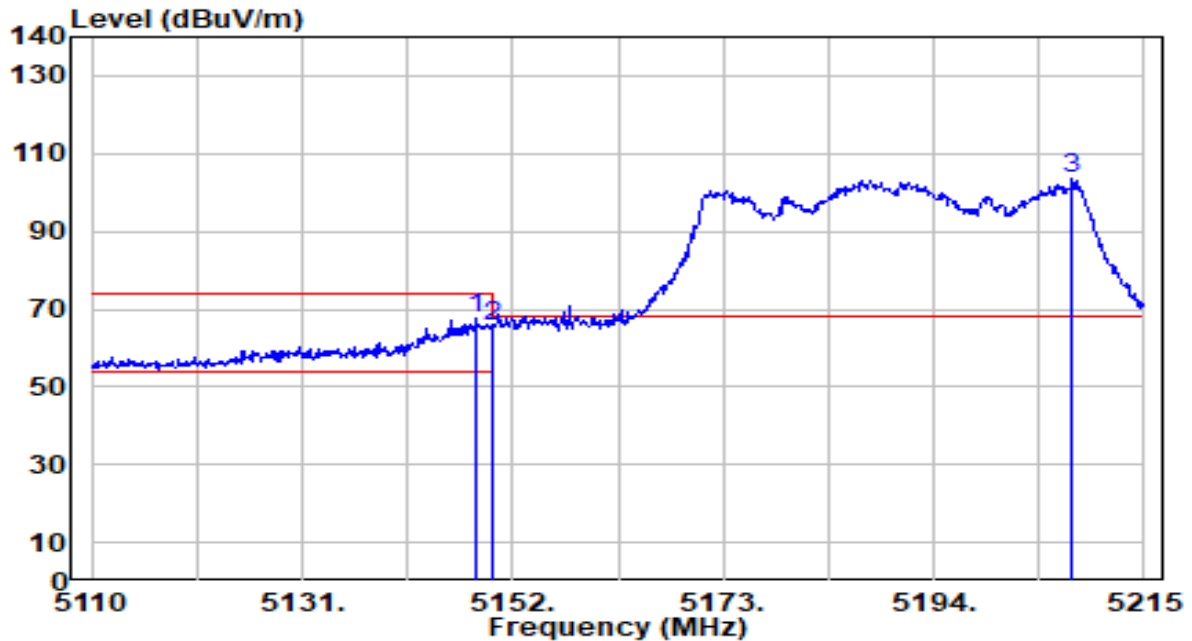


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.430	65.56	1.93	67.49	-6.51	74.00	162	281	Peak
2		5150.000	63.78	1.94	65.72	-8.28	74.00	162	281	Peak
3		5207.755	101.56	1.96	103.52	N/A	N/A	162	281	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-40MHz_TX_Band1_CH 38_ANT 6+7	Test Voltage	By Notebook PC

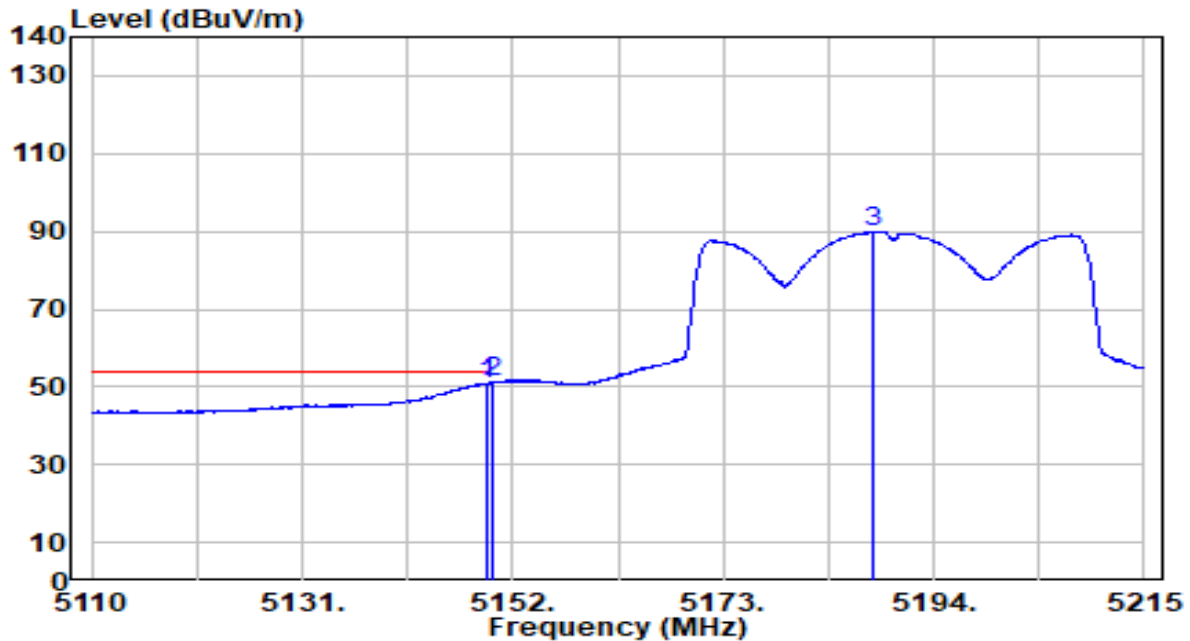


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5149.480	49.02	1.94	50.95	-3.05	54.00	162	281	Average
2	*	5150.000	49.26	1.94	51.20	-2.80	54.00	162	281	Average
3		5187.910	88.02	1.96	89.98	N/A	N/A	162	281	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-40MHz_TX_Band2_CH 62_ANT 6+7	Test Voltage	By Notebook PC

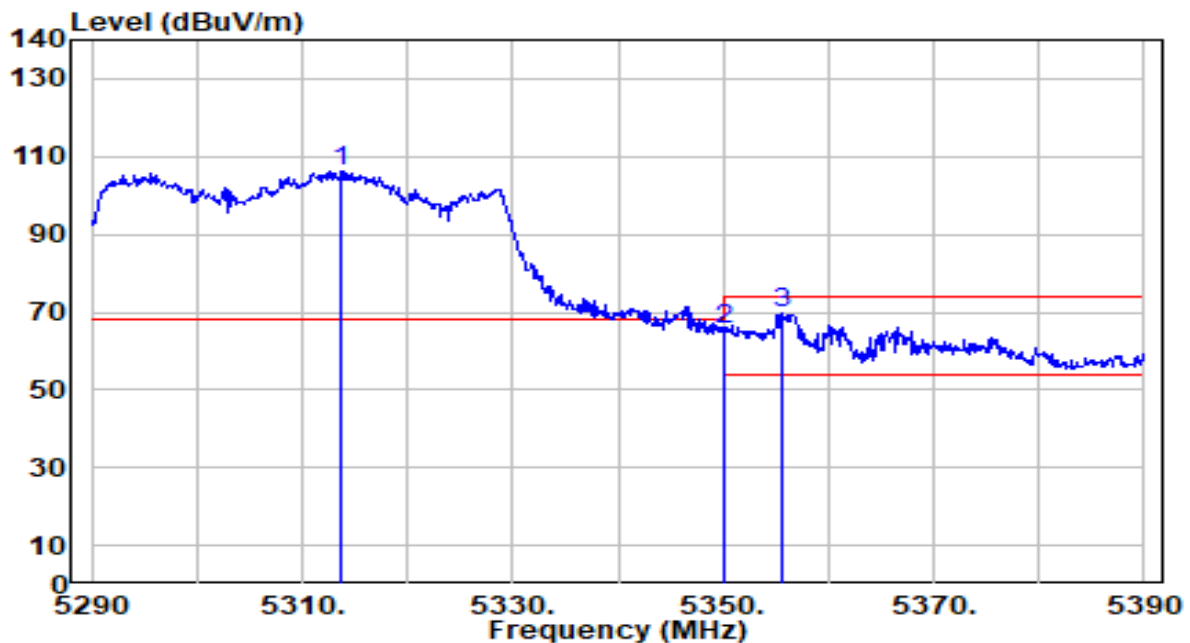


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5313.800	104.14	1.92	106.06	N/A	N/A	244	63	Peak
2	5350.000	63.77	1.90	65.67	-8.33	74.00	244	63	Peak
3	* 5355.700	67.73	1.90	69.63	-4.37	74.00	244	63	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-40MHz_TX_Band2_CH 62_ANT 6+7	Test Voltage	By Notebook PC

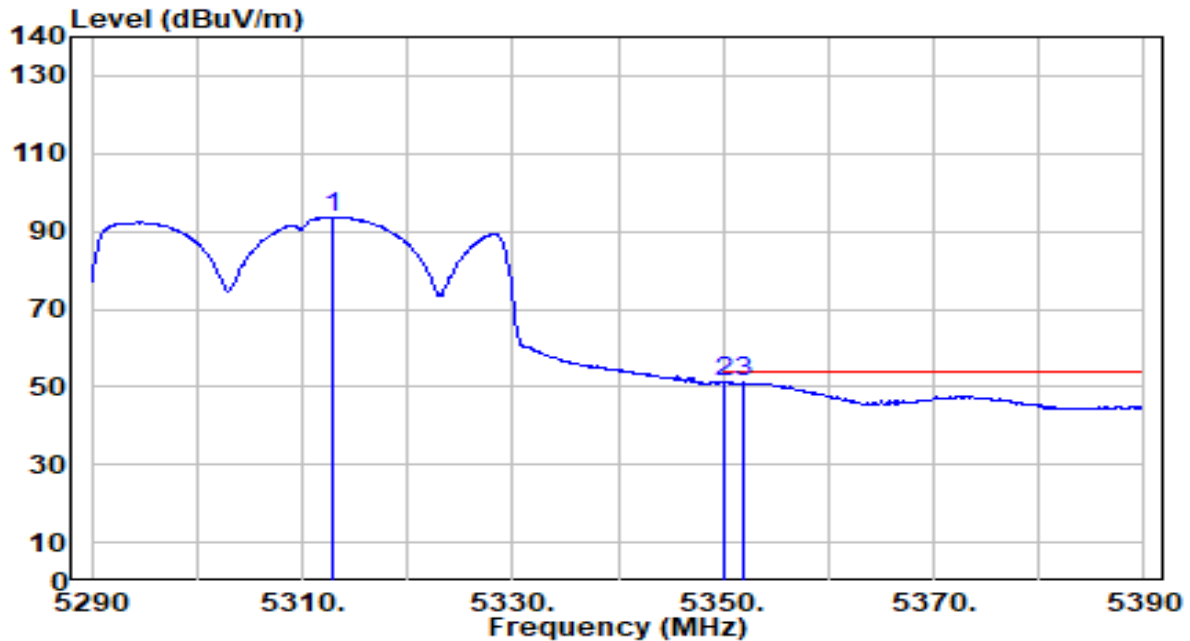


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5313.000	91.81	1.92	93.73	N/A	N/A	244	63	Average
2	5350.000	49.23	1.90	51.13	-2.87	54.00	244	63	Average
3	* 5351.900	49.25	1.90	51.15	-2.85	54.00	244	63	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-40MHz_TX_Band2_CH 62_ANT 6+7	Test Voltage	By Notebook PC

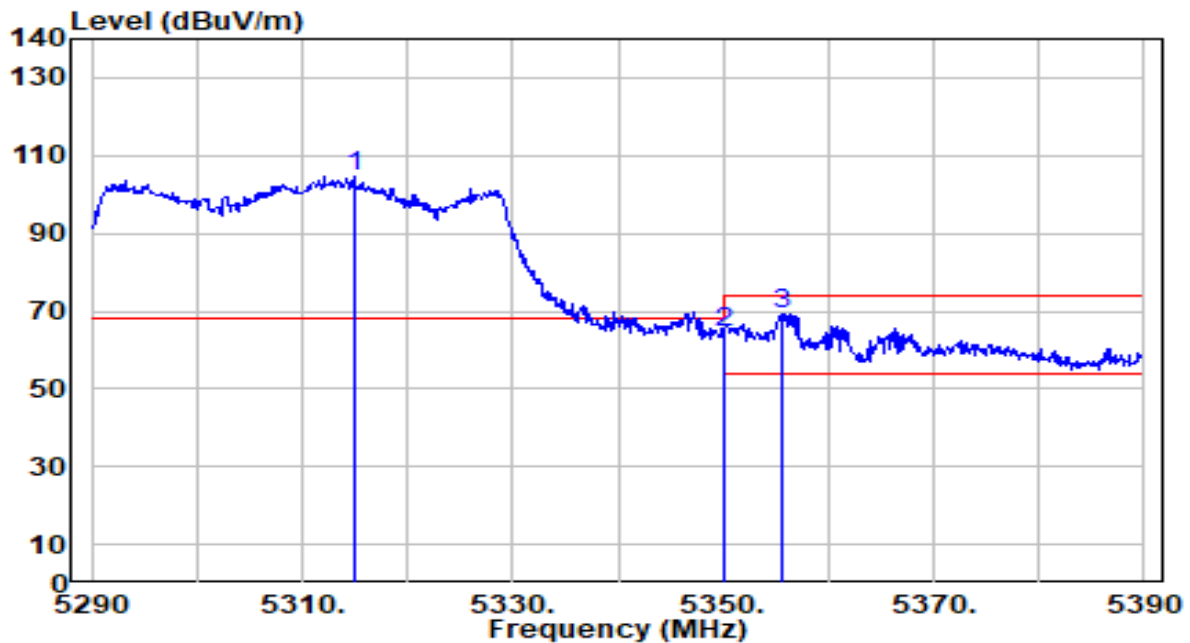


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5314.900	102.66	1.92	104.58	N/A	N/A	272	67	Peak
2	5350.000	62.81	1.90	64.71	-9.29	74.00	272	67	Peak
3	* 5355.700	67.25	1.90	69.15	-4.85	74.00	272	67	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-40MHz_TX_Band2_CH 62_ANT 6+7	Test Voltage	By Notebook PC

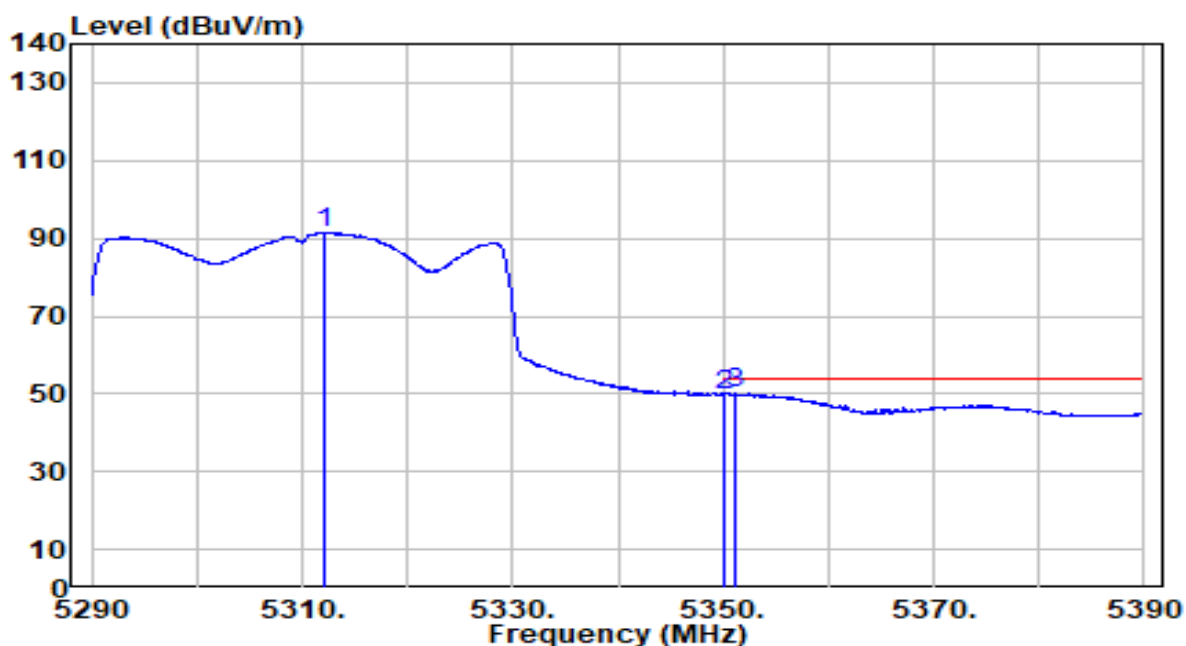


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5312.200	89.40	1.92	91.31	N/A	N/A	272	67	Average
2	5350.000	47.80	1.90	49.71	-4.29	54.00	272	67	Average
3	* 5351.200	48.08	1.90	49.98	-4.02	54.00	272	67	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-40MHz_TX_Band3_CH 102_ANT 6+7	Test Voltage	By Notebook PC

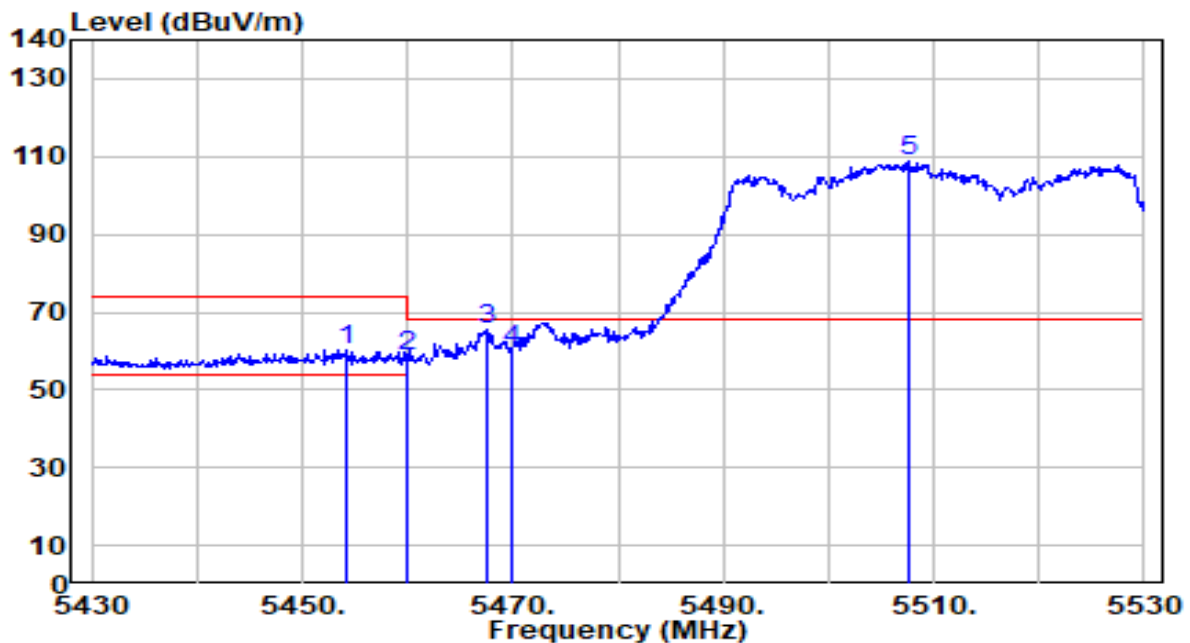


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5454.300	58.41	2.06	60.47	-13.53	74.00	270	343	Peak
2	5460.000	56.47	2.07	58.55	-15.45	74.00	270	343	Peak
3	* 5467.500	63.31	2.10	65.40	-2.80	68.20	270	343	Peak
4	5470.000	58.30	2.11	60.41	-7.79	68.20	270	343	Peak
5	5507.600	106.60	2.23	108.83	N/A	N/A	270	343	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-40MHz_TX_Band3_CH 102_ANT 6+7	Test Voltage	By Notebook PC

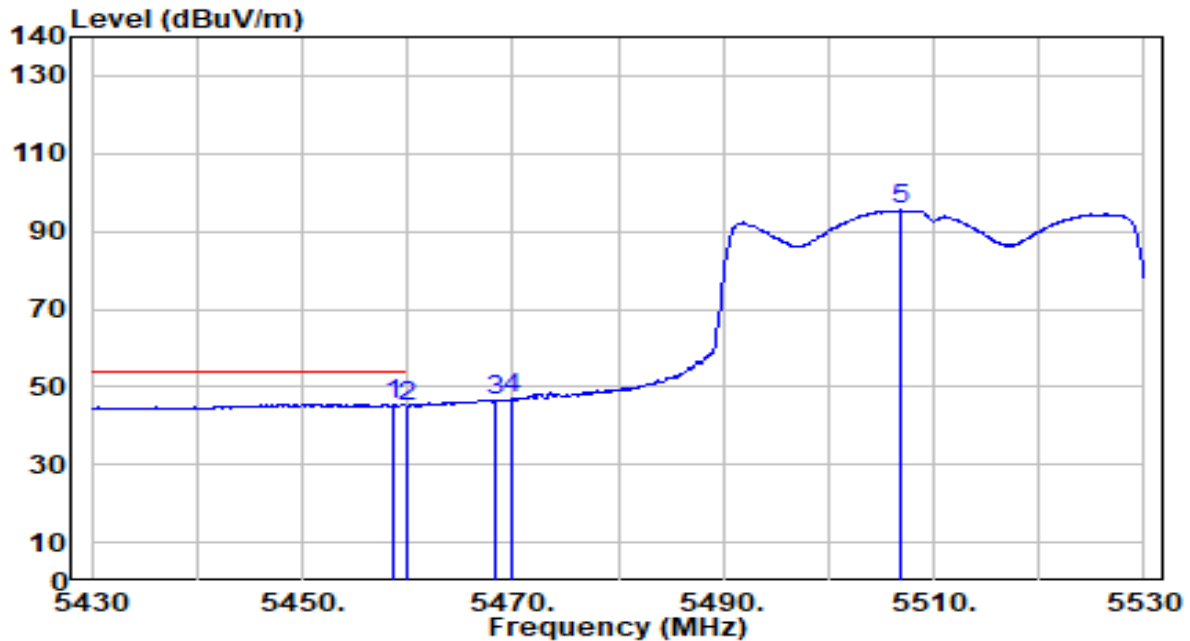


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5458.600	43.43	2.07	45.50	-8.50	54.00	270	343	Average
2		5460.000	43.03	2.07	45.10	-8.90	54.00	270	343	Average
3		5468.400	44.45	2.10	46.55	N/A	N/A	270	343	Average
4		5470.000	44.65	2.11	46.76	N/A	N/A	270	343	Average
5		5506.800	93.15	2.23	95.38	N/A	N/A	270	343	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-40MHz_TX_Band3_CH 102_ANT 6+7	Test Voltage	By Notebook PC

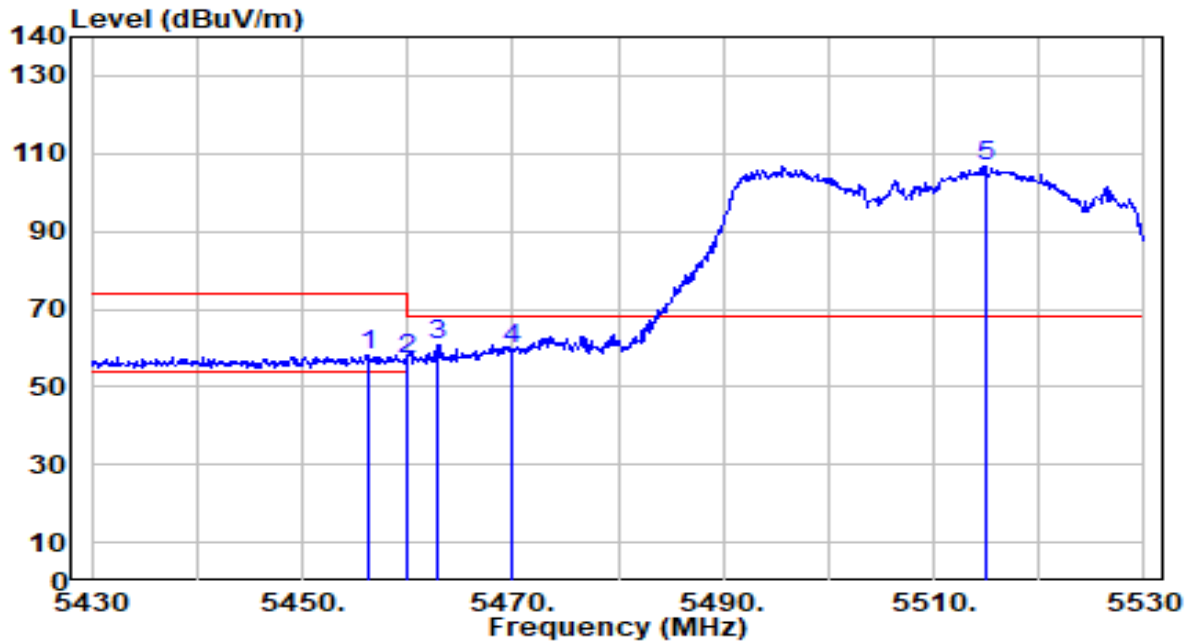


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5456.400	56.21	2.06	58.27	-15.73	74.00	273	77	Peak
2	5460.000	54.80	2.07	56.88	-17.12	74.00	273	77	Peak
3	* 5462.900	58.50	2.08	60.59	-7.61	68.20	273	77	Peak
4	5470.000	57.77	2.11	59.87	-8.33	68.20	273	77	Peak
5	5514.900	104.28	2.26	106.54	N/A	N/A	273	77	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-40MHz_TX_Band3_CH 102_ANT 6+7	Test Voltage	By Notebook PC

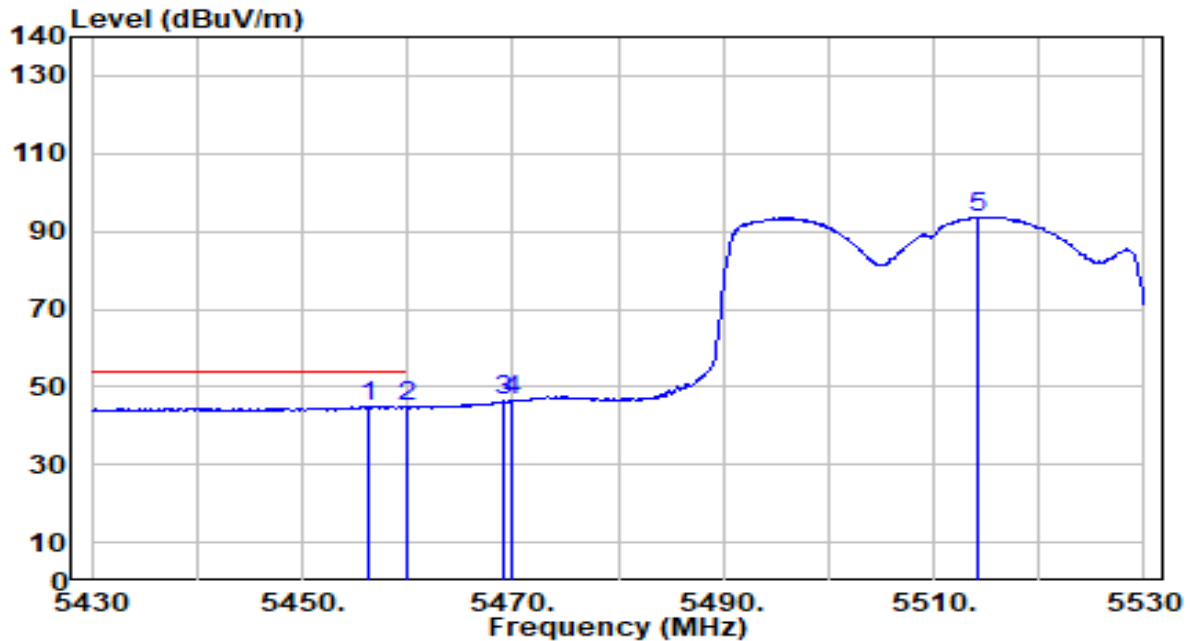


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5456.400	42.83	2.06	44.89	-9.11	54.00	273	77	Average
2	*	5460.000	42.96	2.07	45.04	-8.96	54.00	273	77	Average
3		5469.100	44.14	2.10	46.24	N/A	N/A	273	77	Average
4		5470.000	44.22	2.11	46.32	N/A	N/A	273	77	Average
5		5514.100	91.31	2.26	93.57	N/A	N/A	273	77	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-40MHz_TX_Band3_CH 134_ANT 6+7	Test Voltage	By Notebook PC

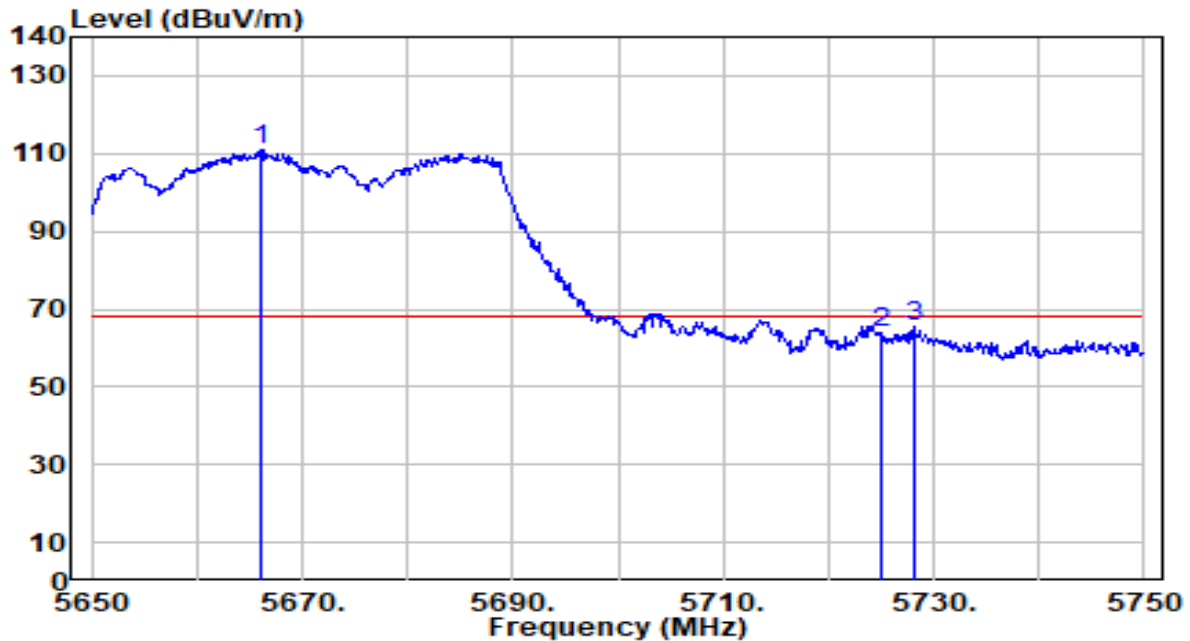


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5666.100	107.76	2.94	110.70	N/A	N/A	238	360	Peak
2	5725.000	60.41	3.25	63.66	-4.54	68.20	238	360	Peak
3	* 5728.100	62.04	3.27	65.31	-2.89	68.20	238	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-40MHz_TX_Band3_CH 134_ANT 6+7	Test Voltage	By Notebook PC

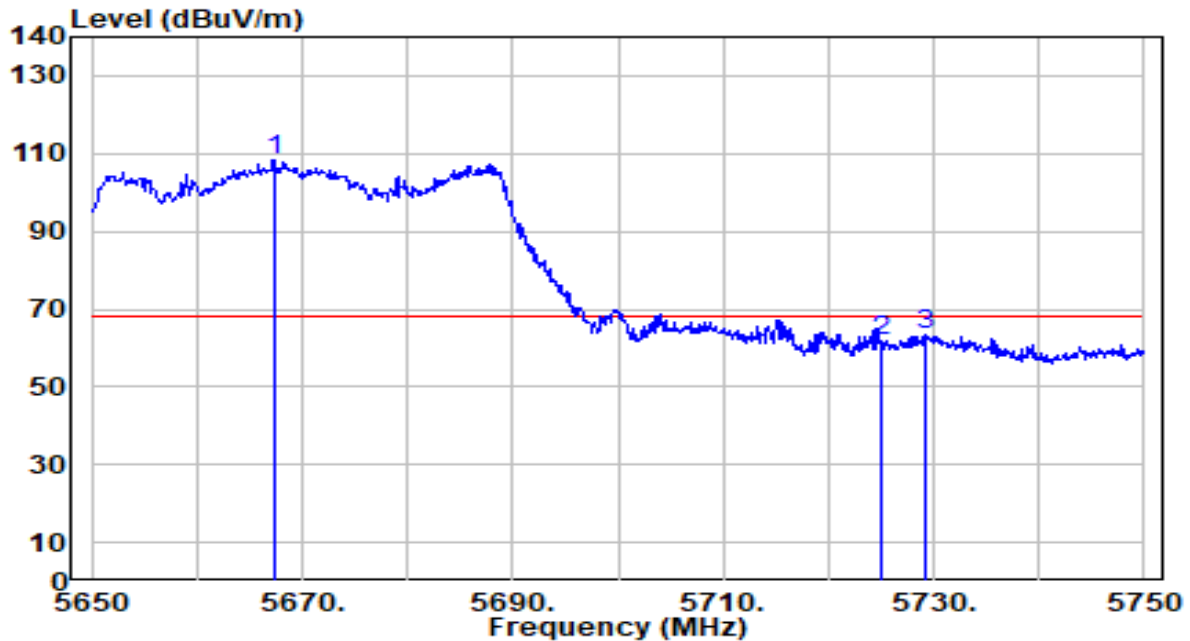


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5667.300	105.59	2.95	108.53	N/A	N/A	193	67	Peak
2	5725.000	58.56	3.25	61.82	-6.38	68.20	193	67	Peak
3	* 5729.100	59.97	3.28	63.25	-4.95	68.20	193	67	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-06-25
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band4_CH 151_ANT 6+7	Test Voltage	By Notebook PC

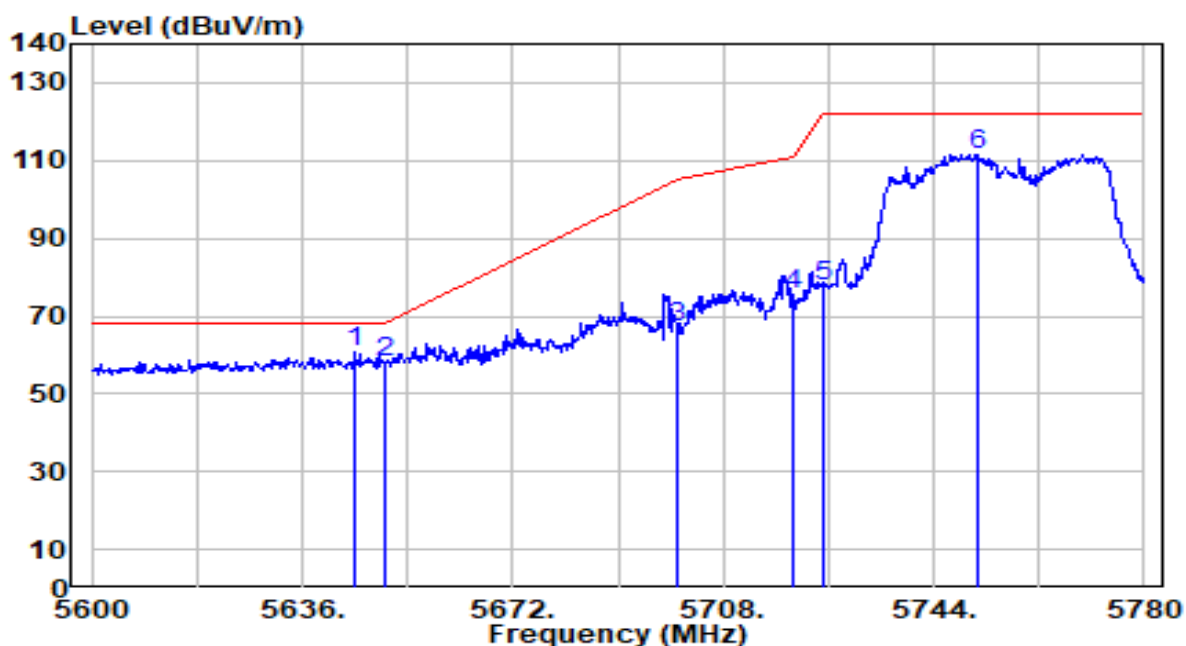


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5645.180	58.13	2.83	60.96	-7.24	68.20	200	0	Peak
2		5650.000	55.48	2.86	58.33	-9.87	68.20	200	0	Peak
3		5700.000	64.21	3.12	67.33	-37.87	105.20	200	0	Peak
4		5720.000	72.25	3.23	75.48	-35.32	110.80	200	0	Peak
5		5725.000	74.48	3.25	77.73	-44.47	122.20	200	0	Peak
6		5751.380	108.28	3.40	111.68	N/A	N/A	200	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-06-25
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band4_CH 151_ANT 6+7	Test Voltage	By Notebook PC

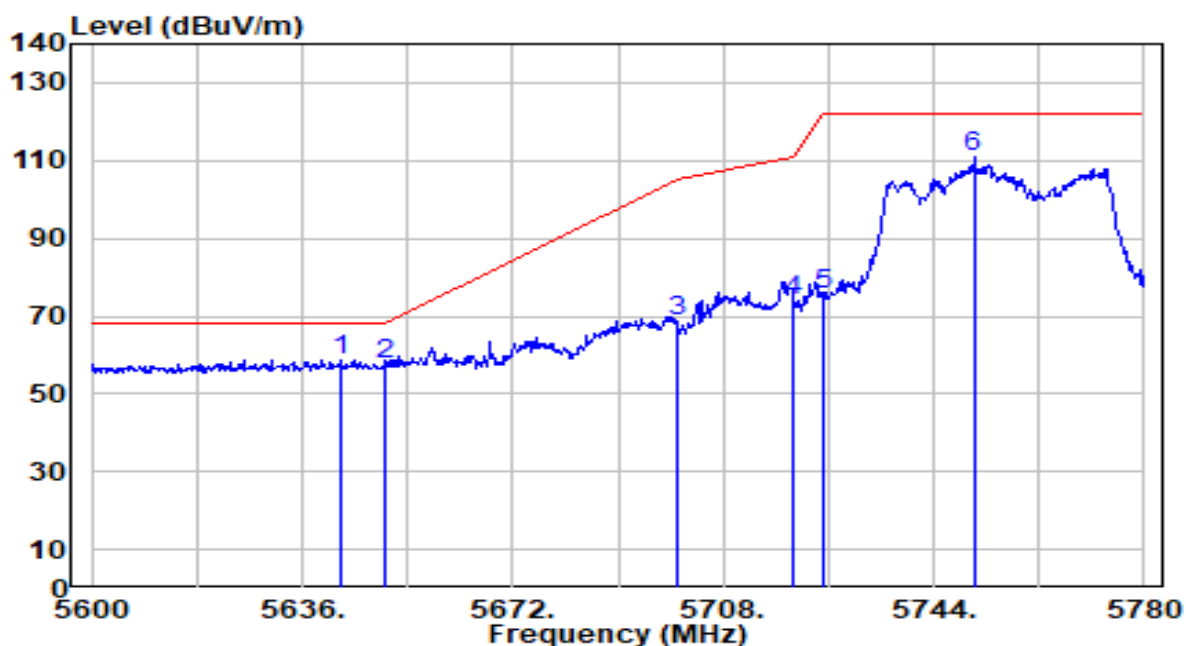


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5642.480	56.07	2.82	58.89	-9.31	68.20	200	63	Peak
2		5650.000	54.66	2.86	57.52	-10.68	68.20	200	63	Peak
3		5700.000	65.36	3.12	68.47	-36.73	105.20	200	63	Peak
4		5720.000	70.61	3.23	73.84	-36.96	110.80	200	63	Peak
5		5725.000	72.24	3.25	75.49	-46.71	122.20	200	63	Peak
6		5750.840	107.31	3.39	110.71	N/A	N/A	200	63	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-06-25
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band4_CH 159_ANT 6+7	Test Voltage	By Notebook PC

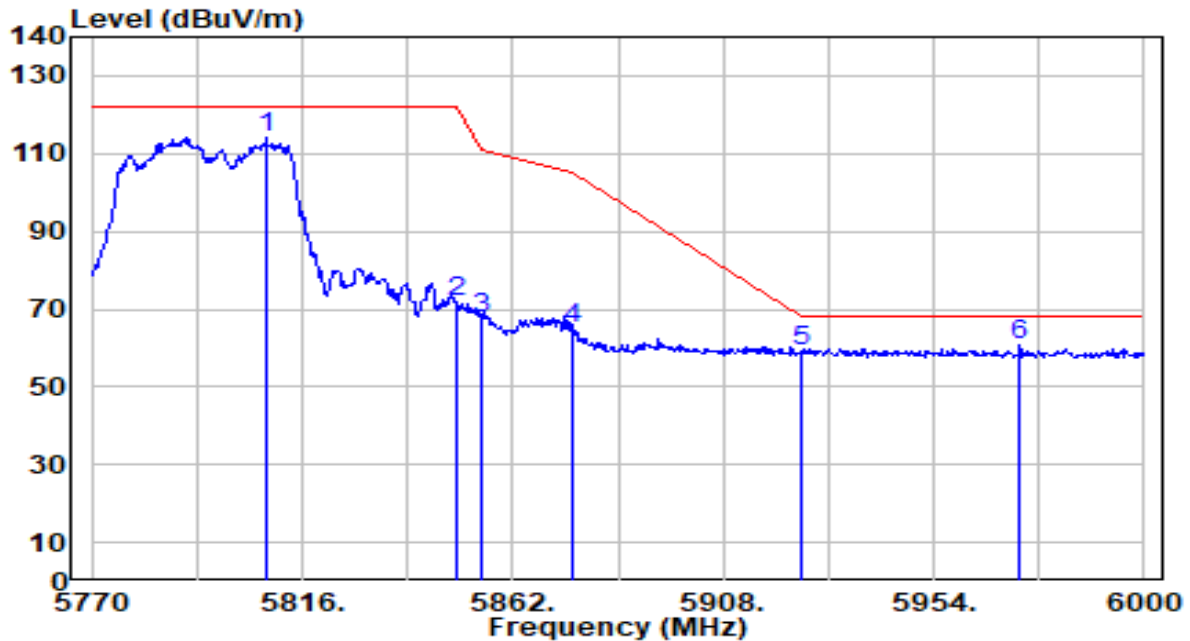


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5808.180	110.65	3.66	114.31	N/A	N/A	178	360	Peak
2	5850.000	68.00	3.63	71.63	-50.57	122.20	178	360	Peak
3	5855.000	64.17	3.63	67.80	-43.00	110.80	178	360	Peak
4	5875.000	61.39	3.61	65.01	-40.19	105.20	178	360	Peak
5	5925.000	55.33	3.59	58.92	-9.28	68.20	178	360	Peak
6	* 5972.630	57.03	3.58	60.61	-7.59	68.20	178	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-06-25
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band4_CH 159_ANT 6+7	Test Voltage	By Notebook PC

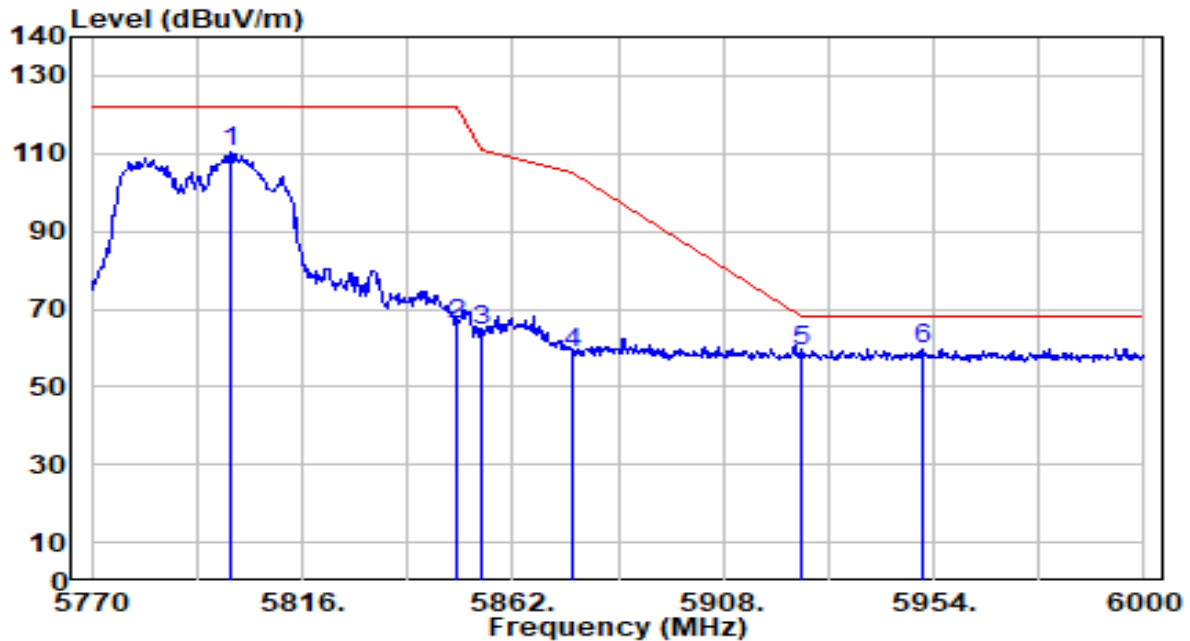


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5800.130	106.66	3.66	110.32	N/A	N/A	304	89	Peak
2	5850.000	62.51	3.63	66.14	-56.06	122.20	304	89	Peak
3	5855.000	60.71	3.63	64.34	-46.46	110.80	304	89	Peak
4	5875.000	55.17	3.61	58.78	-46.42	105.20	304	89	Peak
5	5925.000	55.40	3.59	58.99	-9.21	68.20	304	89	Peak
6	* 5951.470	56.36	3.59	59.95	-8.25	68.20	304	89	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-80MHz_TX_Band1_CH 42_ANT 6+7	Test Voltage	By Notebook PC

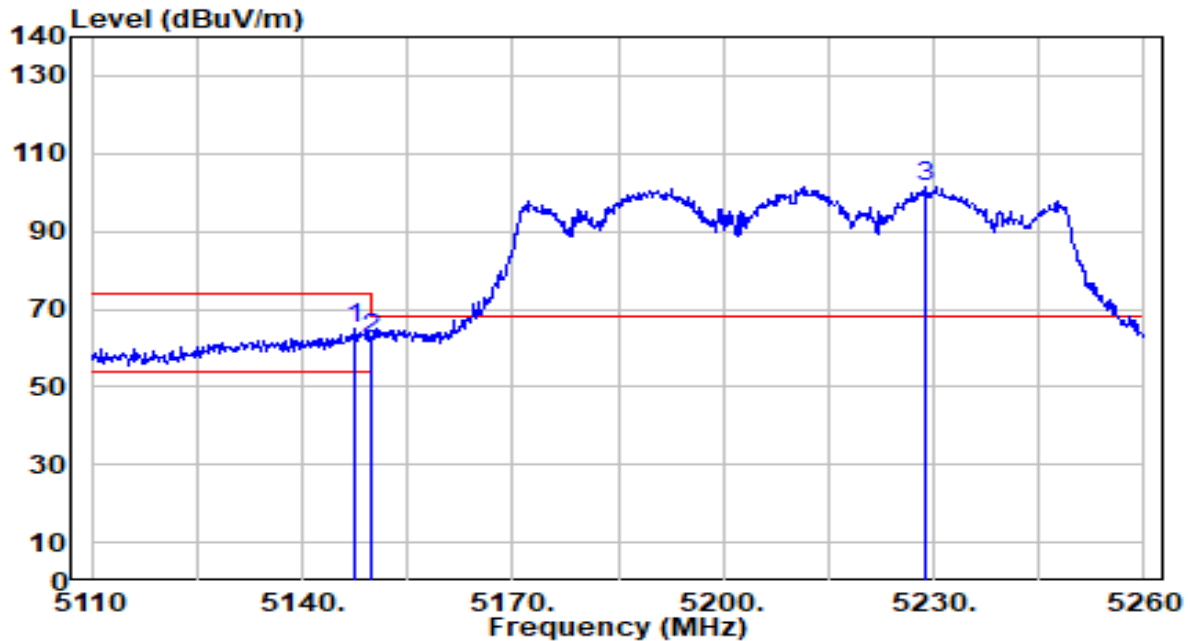


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.500	62.94	1.93	64.88	-9.12	74.00	175	99	Peak
2		5150.000	60.66	1.94	62.60	-11.40	74.00	175	99	Peak
3		5228.950	99.66	1.95	101.62	N/A	N/A	175	99	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-80MHz_TX_Band1_CH 42_ANT 6+7	Test Voltage	By Notebook PC

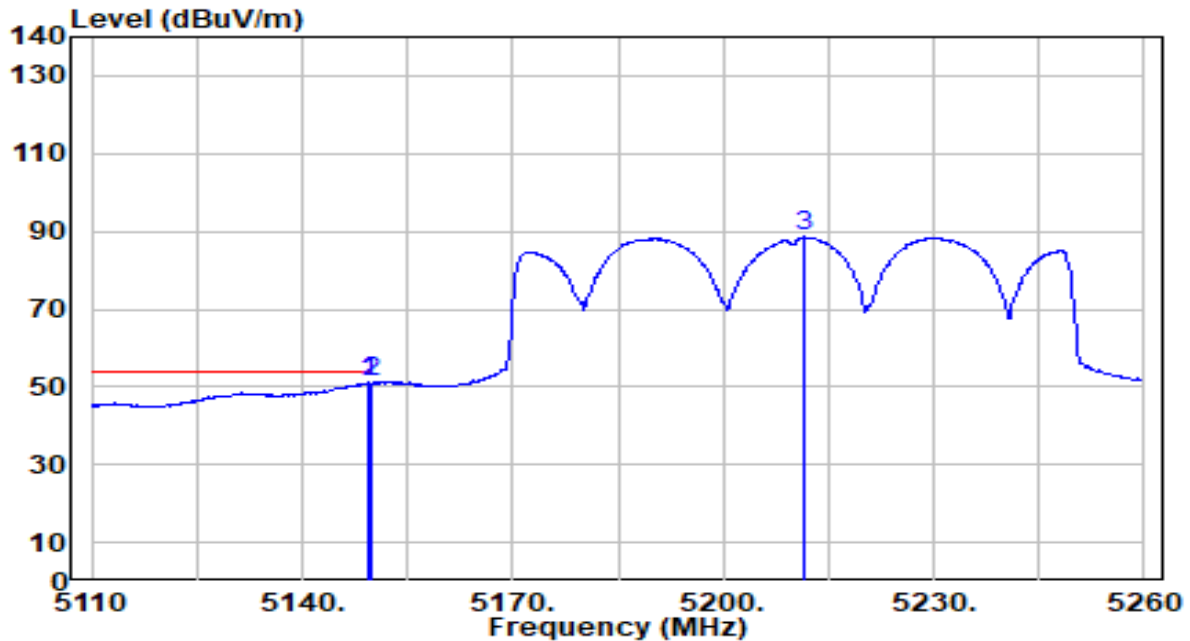


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.450	49.11	1.94	51.04	-2.96	54.00	175	99	Average
2		5150.000	49.05	1.94	50.98	-3.02	54.00	175	99	Average
3		5211.700	86.70	1.96	88.66	N/A	N/A	175	99	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-80MHz_TX_Band1_CH 42_ANT 6+7	Test Voltage	By Notebook PC

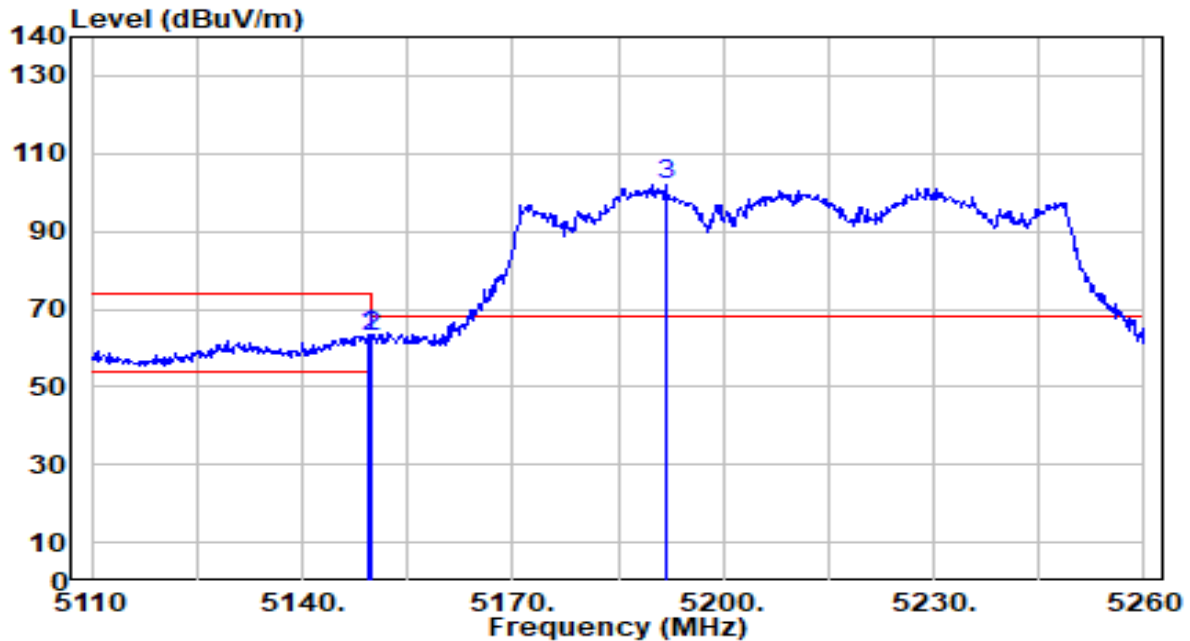


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.300	61.23	1.94	63.16	-10.84	74.00	164	278	Peak
2		5150.000	60.79	1.94	62.73	-11.27	74.00	164	278	Peak
3		5191.900	100.02	1.96	101.98	N/A	N/A	164	278	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-80MHz_TX_Band1_CH 42_ANT 6+7	Test Voltage	By Notebook PC

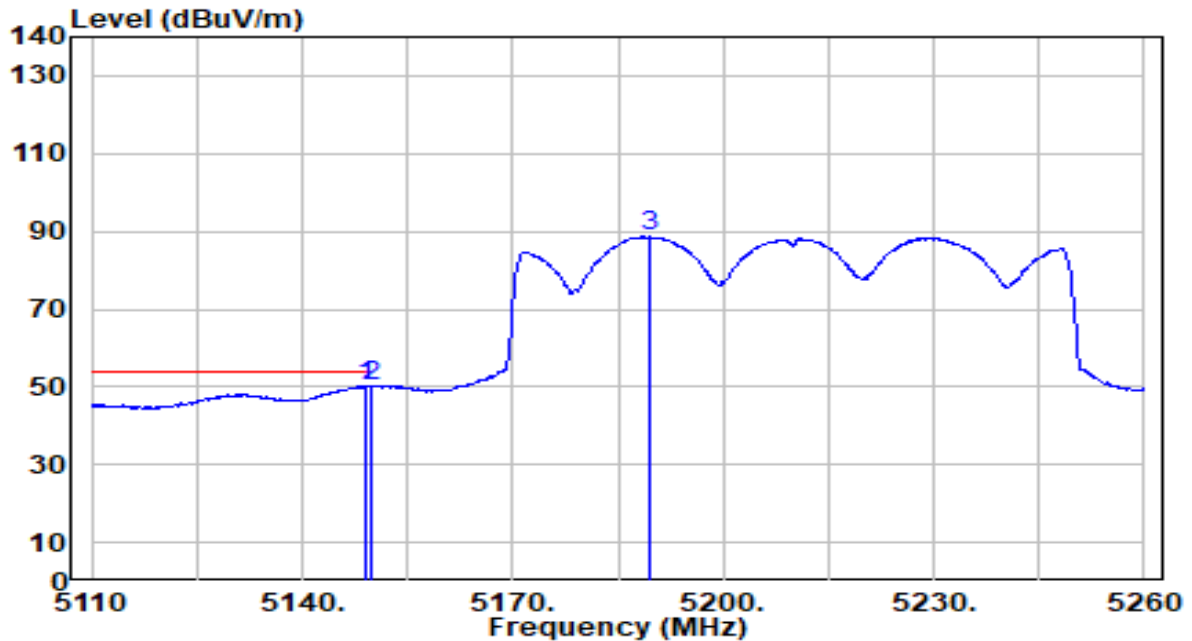


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.150	48.31	1.94	50.24	-3.76	54.00	164	278	Average
2		5150.000	48.27	1.94	50.21	-3.79	54.00	164	278	Average
3		5189.350	86.62	1.96	88.58	N/A	N/A	164	278	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-80MHz_TX_Band2_CH 58_ANT 6+7	Test Voltage	By Notebook PC

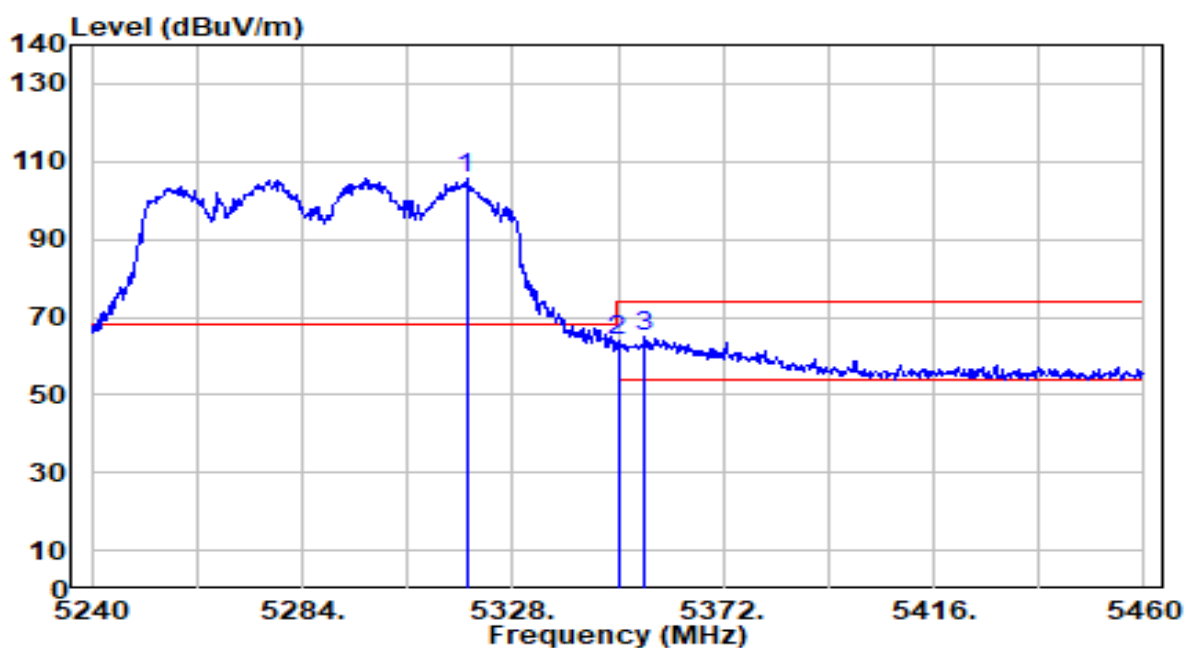


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5318.320	103.63	1.92	105.54	N/A	N/A	100	7	Peak
2	5350.000	61.96	1.90	63.87	-10.13	74.00	100	7	Peak
3	* 5355.720	63.02	1.90	64.92	-9.08	74.00	100	7	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-80MHz_TX_Band2_CH 58_ANT 6+7	Test Voltage	By Notebook PC

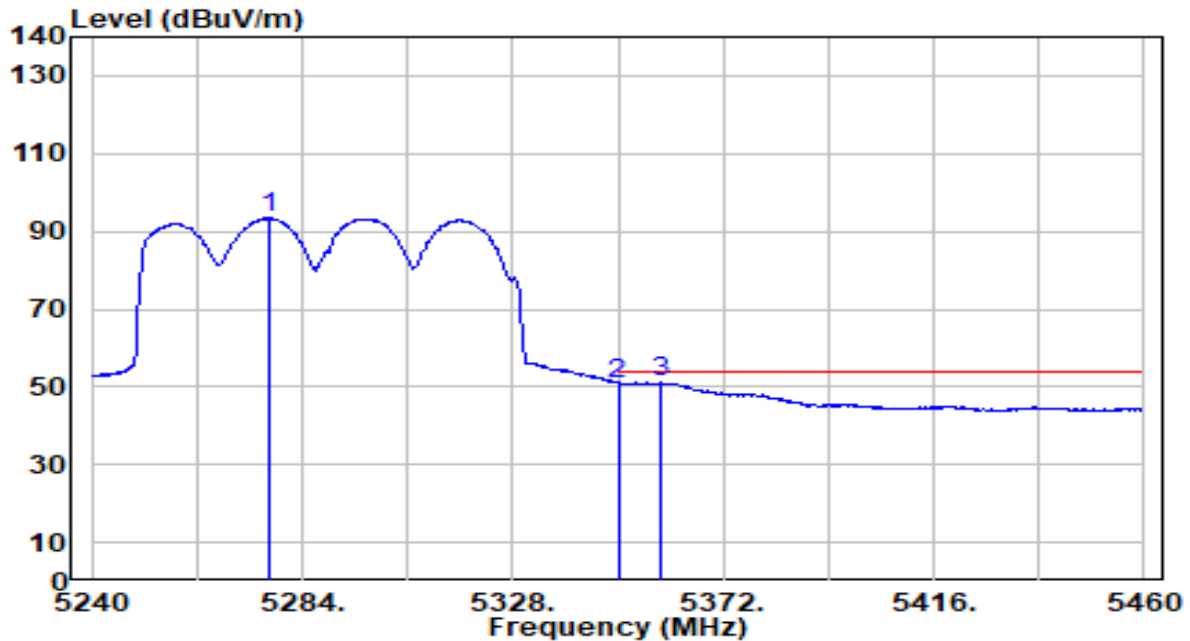


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5276.960	91.48	1.93	93.41	N/A	N/A	100	7	Average
2	5350.000	49.03	1.90	50.94	-3.06	54.00	100	7	Average
3	* 5359.020	49.24	1.90	51.14	-2.86	54.00	100	7	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-80MHz_TX_Band2_CH 58_ANT 6+7	Test Voltage	By Notebook PC

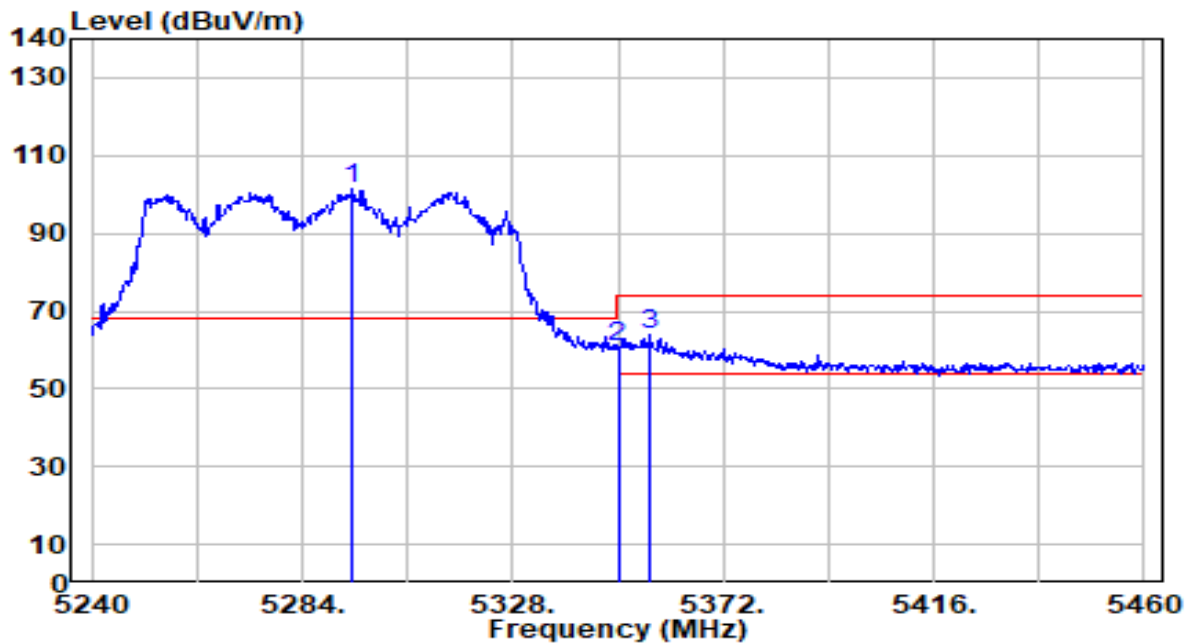


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5294.560	99.42	1.92	101.35	N/A	N/A	204	277	Peak
2	5350.000	58.83	1.90	60.73	-13.27	74.00	204	277	Peak
3	* 5356.820	61.86	1.90	63.76	-10.24	74.00	204	277	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-80MHz_TX_Band2_CH 58_ANT 6+7	Test Voltage	By Notebook PC

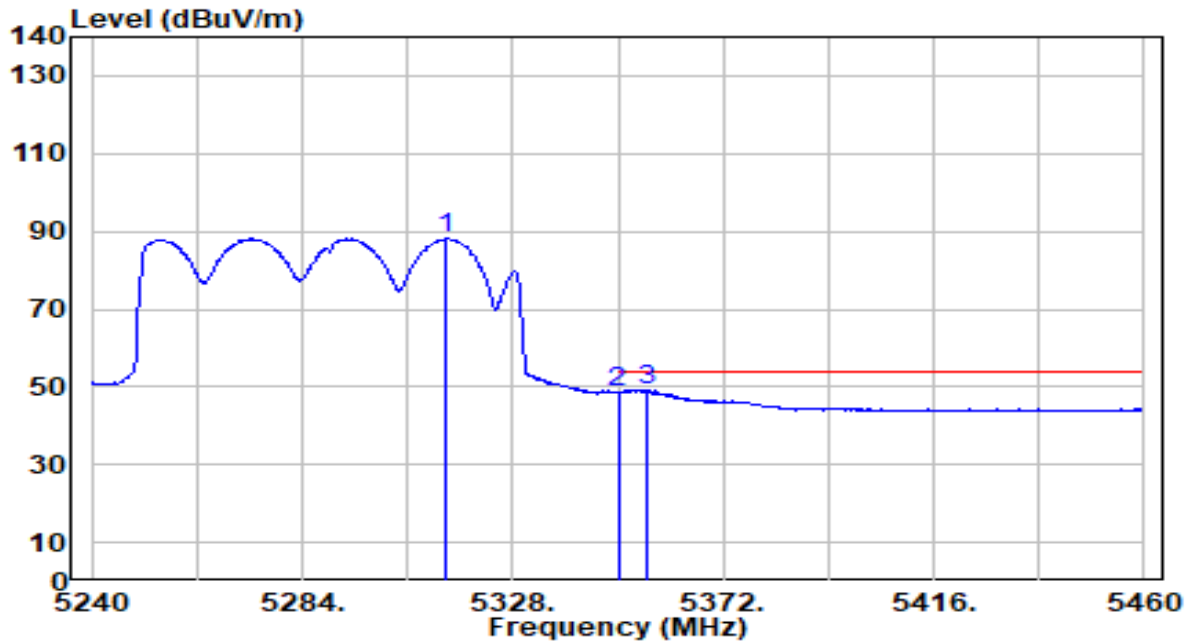


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5314.140	86.25	1.92	88.17	N/A	N/A	204	277	Average
2	5350.000	46.92	1.90	48.82	-5.18	54.00	204	277	Average
3	* 5355.940	47.47	1.90	49.38	-4.62	54.00	204	277	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-80MHz_TX_Band3_CH 106_ANT 6+7	Test Voltage	By Notebook PC

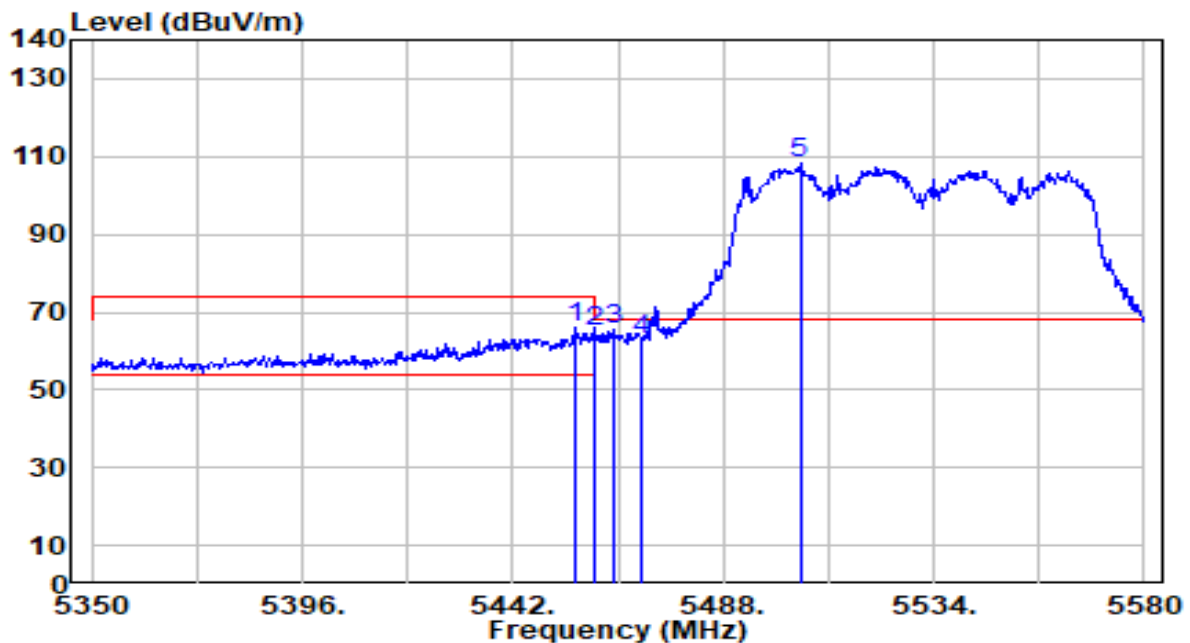


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5455.800	63.74	2.06	65.80	-8.20	74.00	210	340	Peak
2	5460.000	62.65	2.07	64.73	-9.27	74.00	210	340	Peak
3	* 5463.850	63.67	2.09	65.75	-2.45	68.20	210	340	Peak
4	5470.000	60.97	2.11	63.08	-5.12	68.20	210	340	Peak
5	5504.790	106.09	2.22	108.31	N/A	N/A	210	340	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-80MHz_TX_Band3_CH 106_ANT 6+7	Test Voltage	By Notebook PC

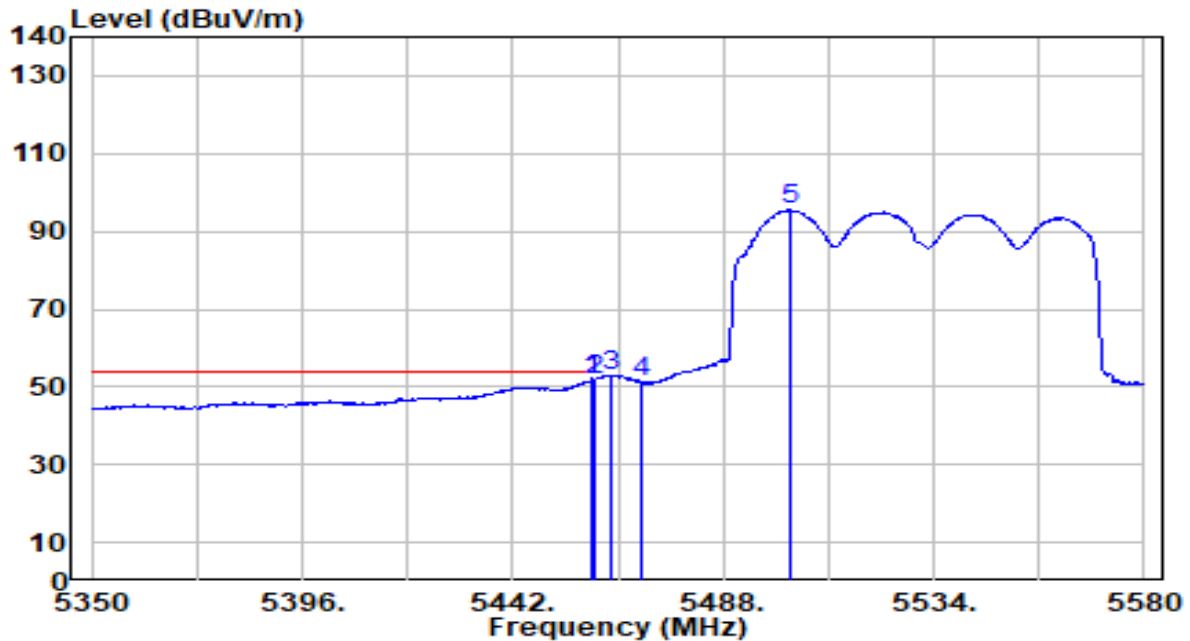


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5459.020	49.48	2.07	51.56	-2.44	54.00	210	340	Average
2	*	5460.000	49.60	2.07	51.68	-2.32	54.00	210	340	Average
3		5463.390	50.80	2.09	52.88	N/A	N/A	210	340	Average
4		5470.000	49.24	2.11	51.35	N/A	N/A	210	340	Average
5		5502.490	93.28	2.21	95.49	N/A	N/A	210	340	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-80MHz_TX_Band3_CH 106_ANT 6+7	Test Voltage	By Notebook PC

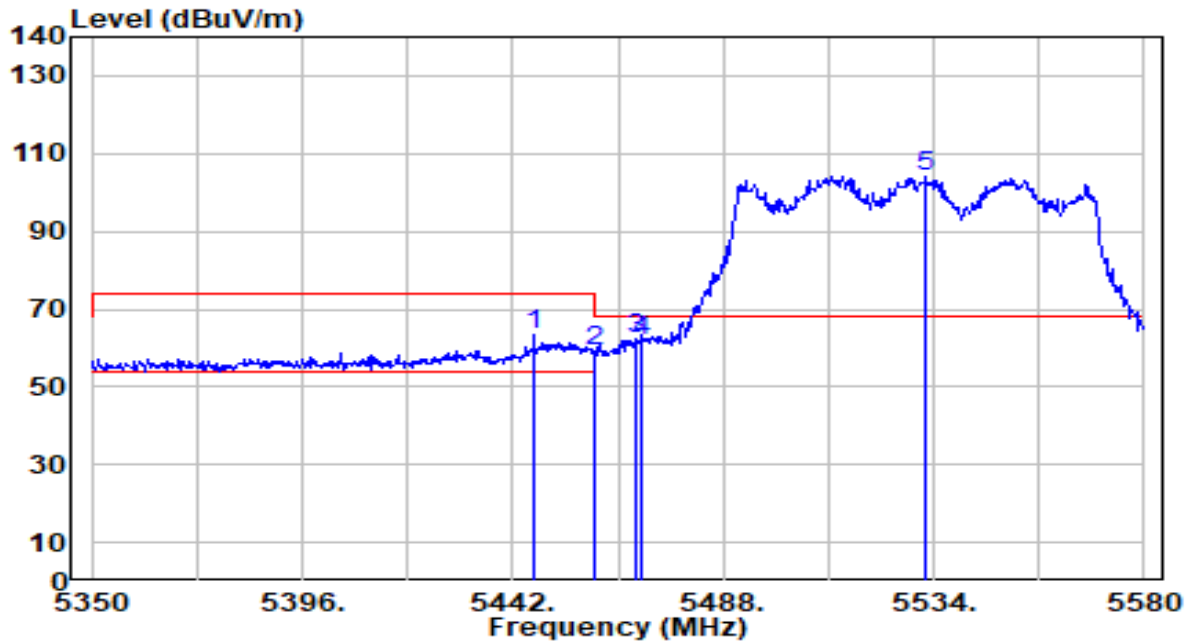


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5446.600	61.50	2.03	63.53	-10.47	74.00	225	74	Peak
2	5460.000	56.86	2.07	58.93	-15.07	74.00	225	74	Peak
3	* 5468.680	60.16	2.10	62.26	-5.94	68.20	225	74	Peak
4	5470.000	59.76	2.11	61.86	-6.34	68.20	225	74	Peak
5	5532.390	101.97	2.33	104.30	N/A	N/A	225	74	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-80MHz_TX_Band3_CH 106_ANT 6+7	Test Voltage	By Notebook PC

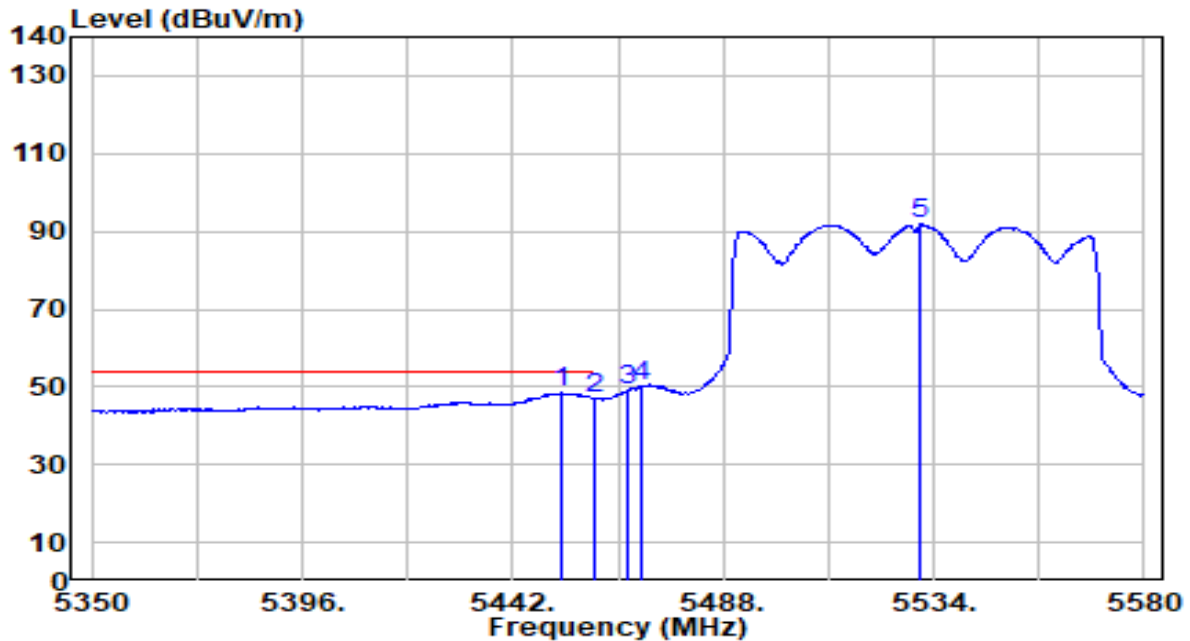


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5452.810	46.31	2.05	48.36	-5.64	54.00	225	74	Average
2		5460.000	44.92	2.07	47.00	-7.00	54.00	225	74	Average
3		5467.300	47.21	2.10	49.30	N/A	N/A	225	74	Average
4		5470.000	47.90	2.11	50.00	N/A	N/A	225	74	Average
5		5531.010	89.42	2.32	91.74	N/A	N/A	225	74	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-06-25
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-80MHz_TX_Band4_CH 155_ANT 6+7	Test Voltage	By Notebook PC

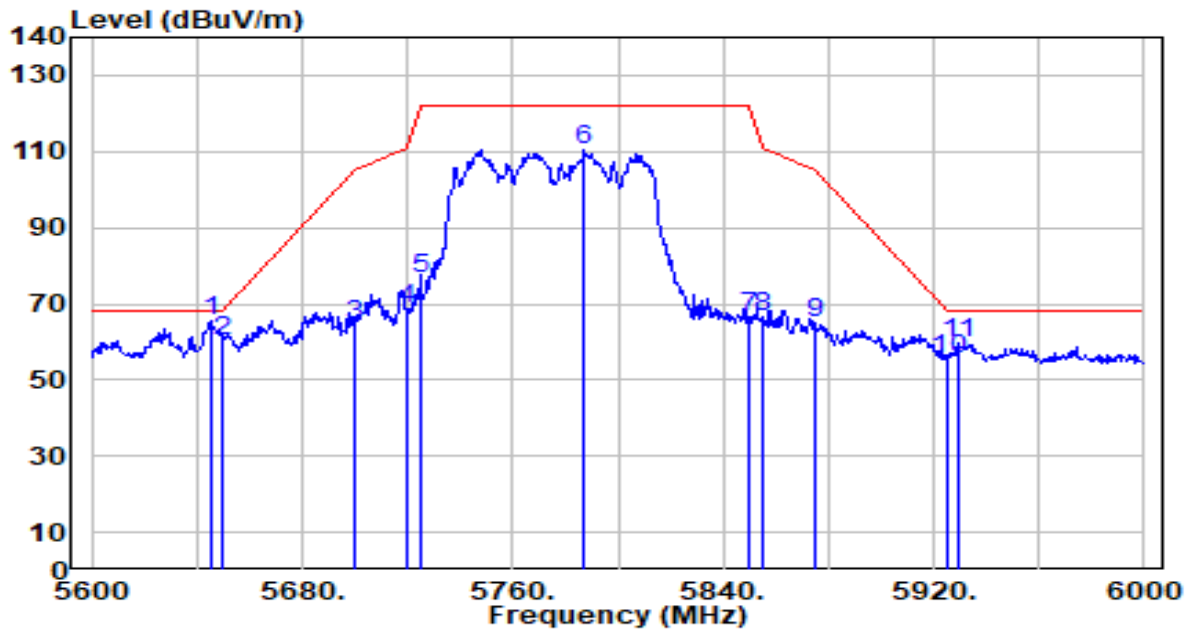


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5645.200	62.65	2.83	65.48	-2.72	68.20	185	342	Peak
2		5650.000	57.56	2.86	60.42	-7.78	68.20	185	342	Peak
3		5700.000	61.33	3.12	64.45	-40.75	105.20	185	342	Peak
4		5720.000	65.30	3.23	68.52	-42.28	110.80	185	342	Peak
5		5725.000	73.23	3.25	76.48	-45.72	122.20	185	342	Peak
6		5787.200	106.73	3.59	110.33	N/A	N/A	185	342	Peak
7		5850.000	63.07	3.63	66.70	-55.50	122.20	185	342	Peak
8		5855.000	62.76	3.63	66.39	-44.41	110.80	185	342	Peak
9		5875.000	61.22	3.61	64.84	-40.36	105.20	185	342	Peak
10		5925.000	52.04	3.59	55.64	-12.56	68.20	185	342	Peak
11		5929.200	56.06	3.59	59.65	-8.55	68.20	185	342	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-06-25
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-80MHz_TX_Band4_CH 155_ANT 6+7	Test Voltage	By Notebook PC

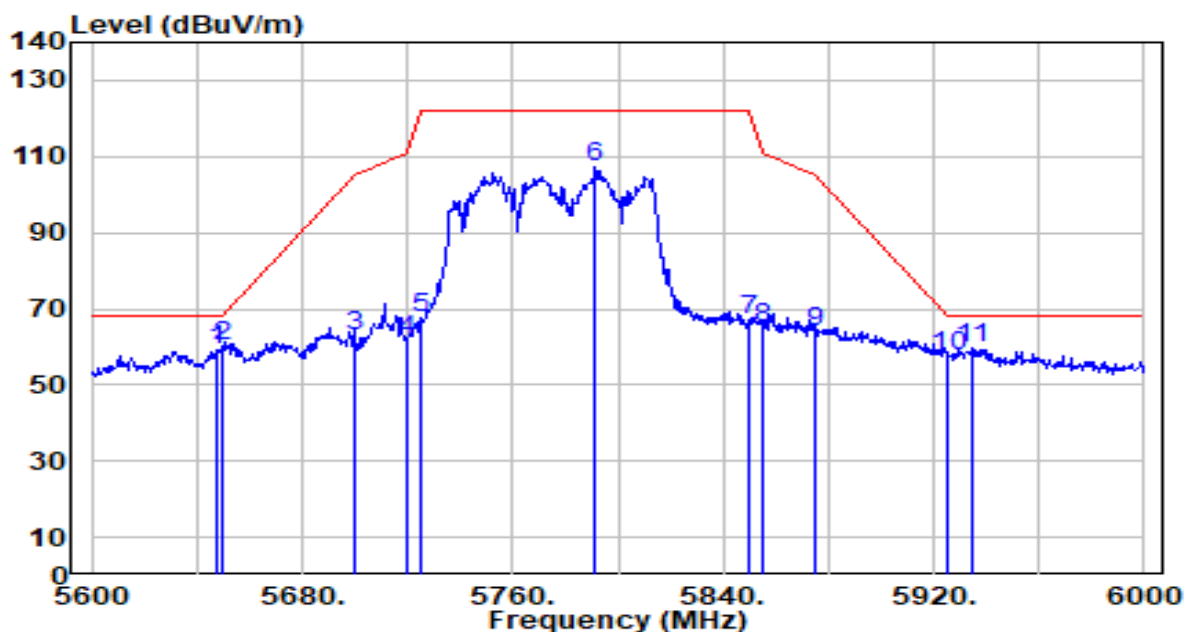


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5648.000	56.40	2.85	59.24	-8.96	68.20	176	65	Peak
2	* 5650.000	57.11	2.86	59.97	-8.23	68.20	176	65	Peak
3	5700.000	60.01	3.12	63.13	-42.07	105.20	176	65	Peak
4	5720.000	58.35	3.23	61.57	-49.23	110.80	176	65	Peak
5	5725.000	64.33	3.25	67.58	-54.62	122.20	176	65	Peak
6	5791.600	103.78	3.62	107.40	N/A	N/A	176	65	Peak
7	5850.000	63.70	3.63	67.32	-54.88	122.20	176	65	Peak
8	5855.000	61.13	3.63	64.76	-46.04	110.80	176	65	Peak
9	5875.000	60.28	3.61	63.90	-41.30	105.20	176	65	Peak
10	5925.000	53.99	3.59	57.58	-10.62	68.20	176	65	Peak
11	5934.800	56.13	3.59	59.72	-8.48	68.20	176	65	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_TX_Band1,2_CH 50_ANT 6+7	Test Voltage	By Notebook PC

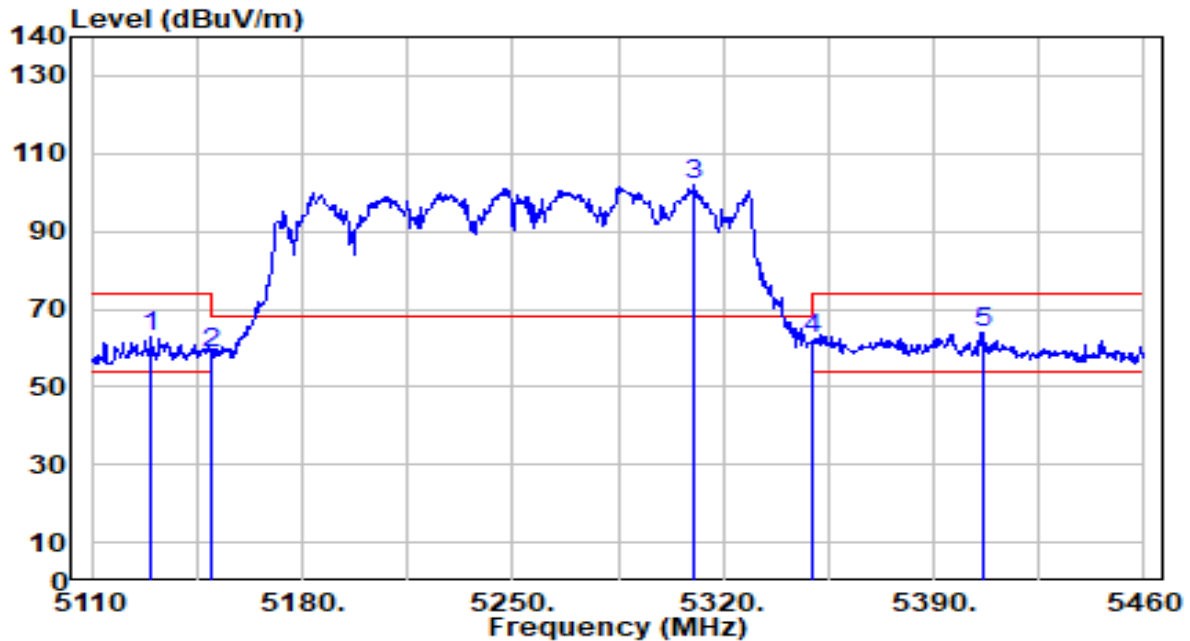


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5129.950	60.71	1.92	62.63	-11.37	74.00	275	349	Peak
2	5150.000	56.80	1.94	58.73	-15.27	74.00	275	349	Peak
3	5310.550	99.95	1.92	101.87	N/A	N/A	275	349	Peak
4	5350.000	60.24	1.90	62.15	-11.85	74.00	275	349	Peak
5	* 5406.100	62.08	1.91	63.98	-10.02	74.00	275	349	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_TX_Band1,2_CH 50_ANT 6+7	Test Voltage	By Notebook PC

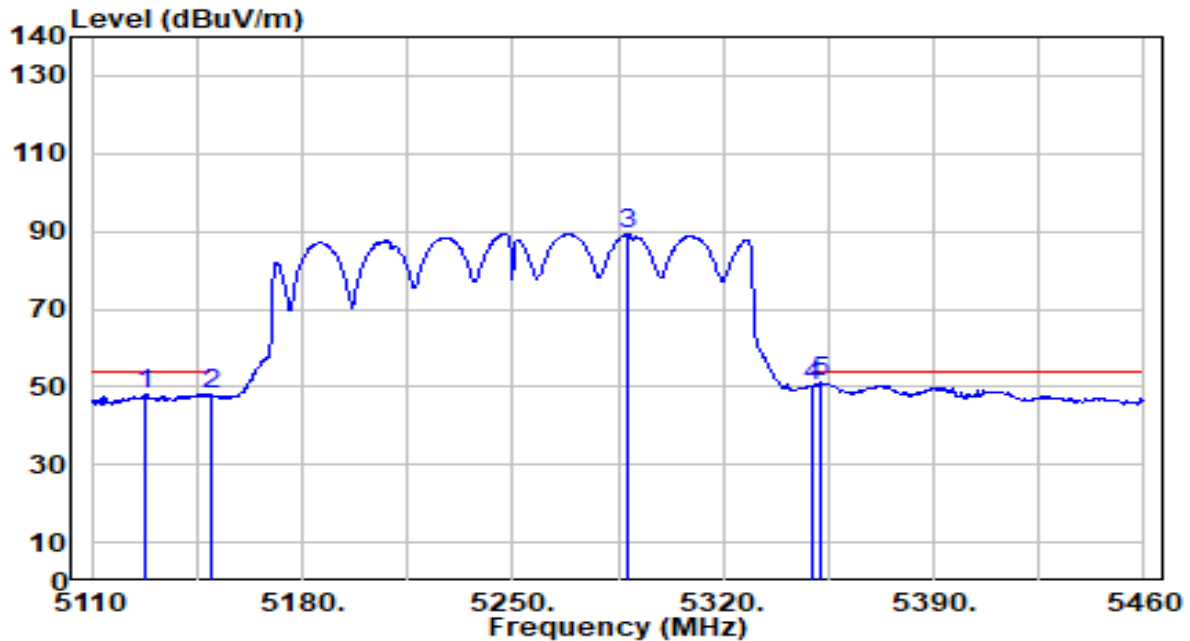


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5128.200	46.25	1.92	48.17	-5.83	54.00	275	349	Average
2	5150.000	46.06	1.94	47.99	-6.01	54.00	275	349	Average
3	5287.800	87.55	1.93	89.48	N/A	N/A	275	349	Average
4	5350.000	48.27	1.90	50.17	-3.83	54.00	275	349	Average
5	* 5352.550	49.21	1.90	51.11	-2.89	54.00	275	349	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_TX_Band1,2_CH 50_ANT 6+7	Test Voltage	By Notebook PC

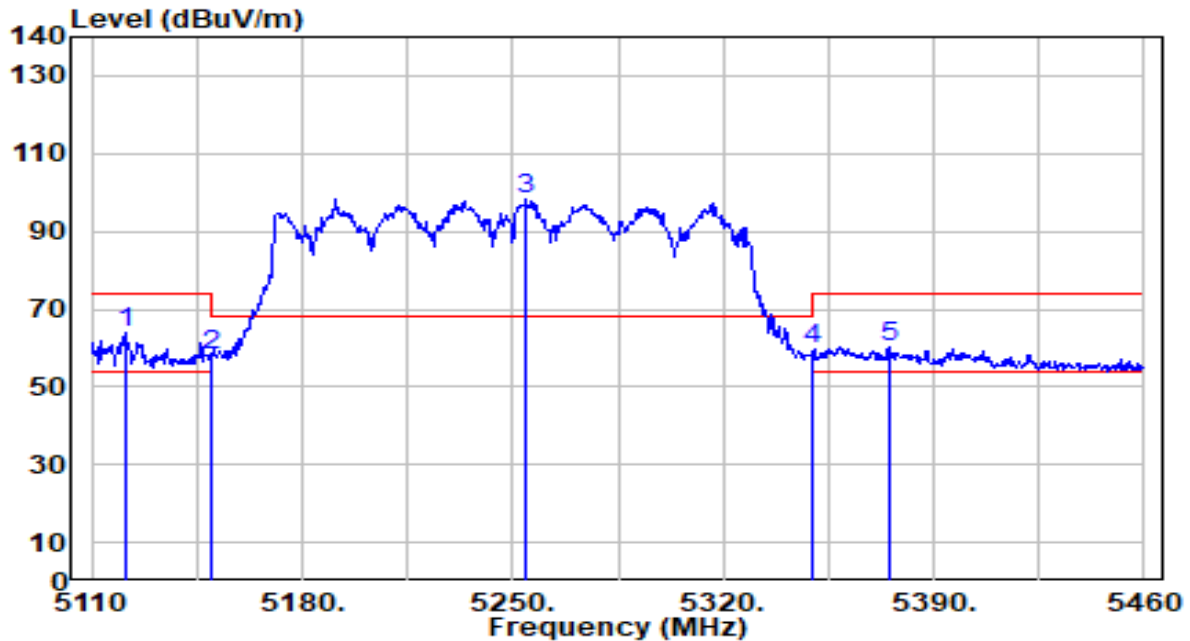


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5121.200	61.96	1.92	63.87	-10.13	74.00	205	282	Peak
2		5150.000	56.18	1.94	58.12	-15.88	74.00	205	282	Peak
3		5254.200	96.49	1.94	98.43	N/A	N/A	205	282	Peak
4		5350.000	58.04	1.90	59.95	-14.05	74.00	205	282	Peak
5		5375.650	58.56	1.89	60.46	-13.54	74.00	205	282	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_TX_Band1,2_CH 50_ANT 6+7	Test Voltage	By Notebook PC

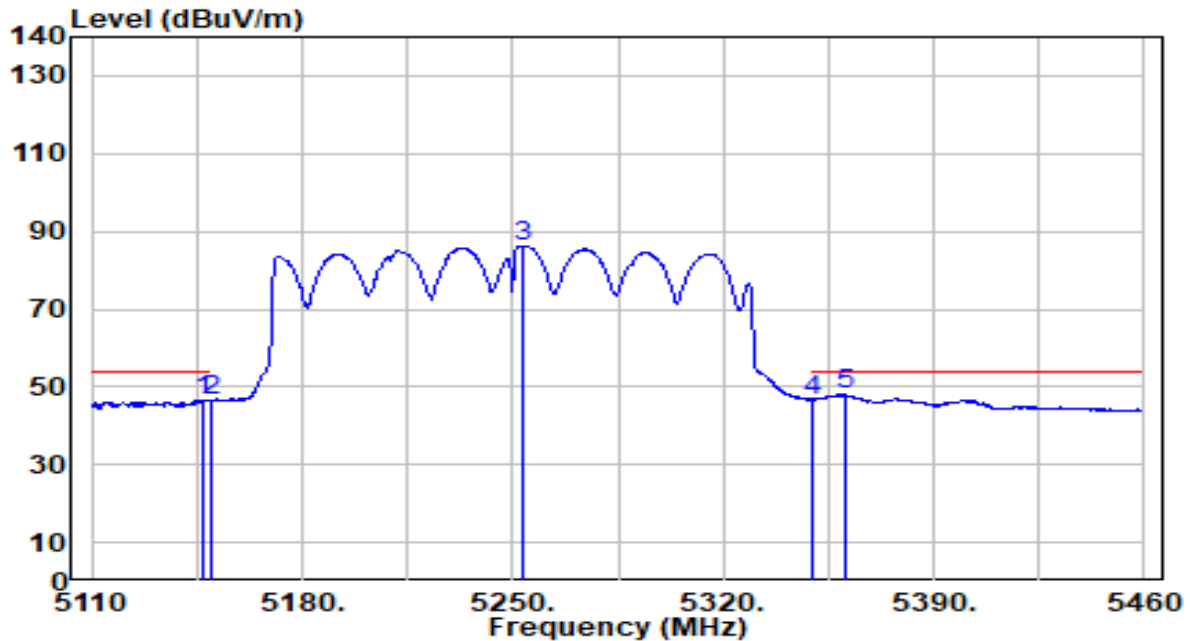


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5147.100	44.74	1.93	46.67	-7.33	54.00	205	282	Average
2	5150.000	44.49	1.94	46.42	-7.58	54.00	205	282	Average
3	5253.150	84.43	1.94	86.38	N/A	N/A	205	282	Average
4	5350.000	44.85	1.90	46.75	-7.25	54.00	205	282	Average
5	* 5360.250	46.18	1.90	48.08	-5.92	54.00	205	282	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-06-25
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_TX_Band3_CH 114_ANT 6+7	Test Voltage	By Notebook PC

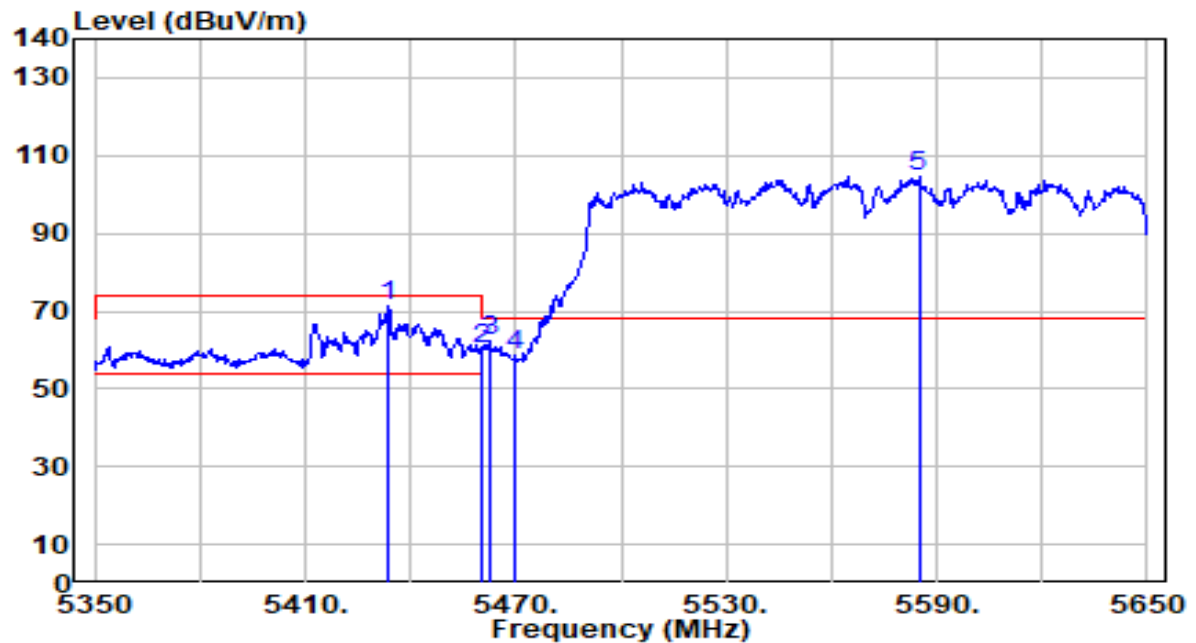


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5433.400	69.23	1.99	71.22	-2.78	74.00	191	349	Peak
2		5460.000	58.33	2.07	60.41	-13.59	74.00	191	349	Peak
3		5462.500	60.04	2.08	62.12	-6.08	68.20	191	349	Peak
4		5470.000	56.65	2.11	58.75	-9.45	68.20	191	349	Peak
5		5584.900	102.01	2.53	104.55	N/A	N/A	191	349	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-06-25
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_TX_Band3_CH 114_ANT 6+7	Test Voltage	By Notebook PC

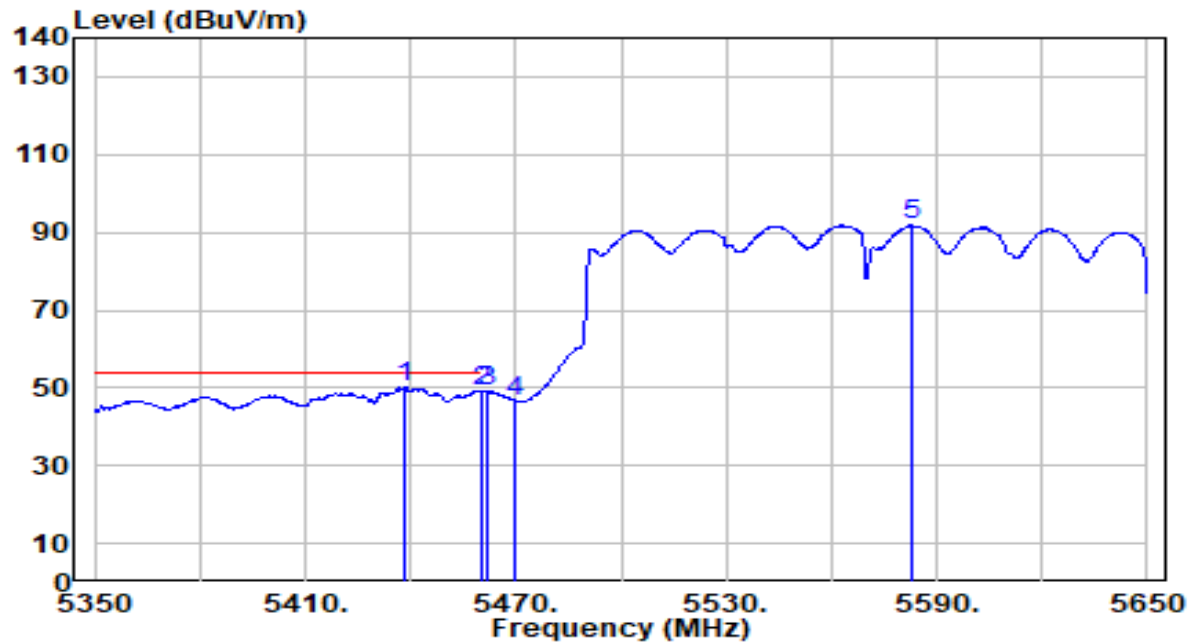


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5438.500	48.19	2.01	50.20	-3.80	54.00	191	349	Average
2		5460.000	46.91	2.07	48.98	-5.02	54.00	191	349	Average
3		5461.900	47.02	2.08	49.10	N/A	N/A	191	349	Average
4		5470.000	44.29	2.11	46.39	N/A	N/A	191	349	Average
5		5582.800	89.23	2.53	91.76	N/A	N/A	191	349	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-06-25
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_TX_Band3_CH 114_ANT 6+7	Test Voltage	By Notebook PC

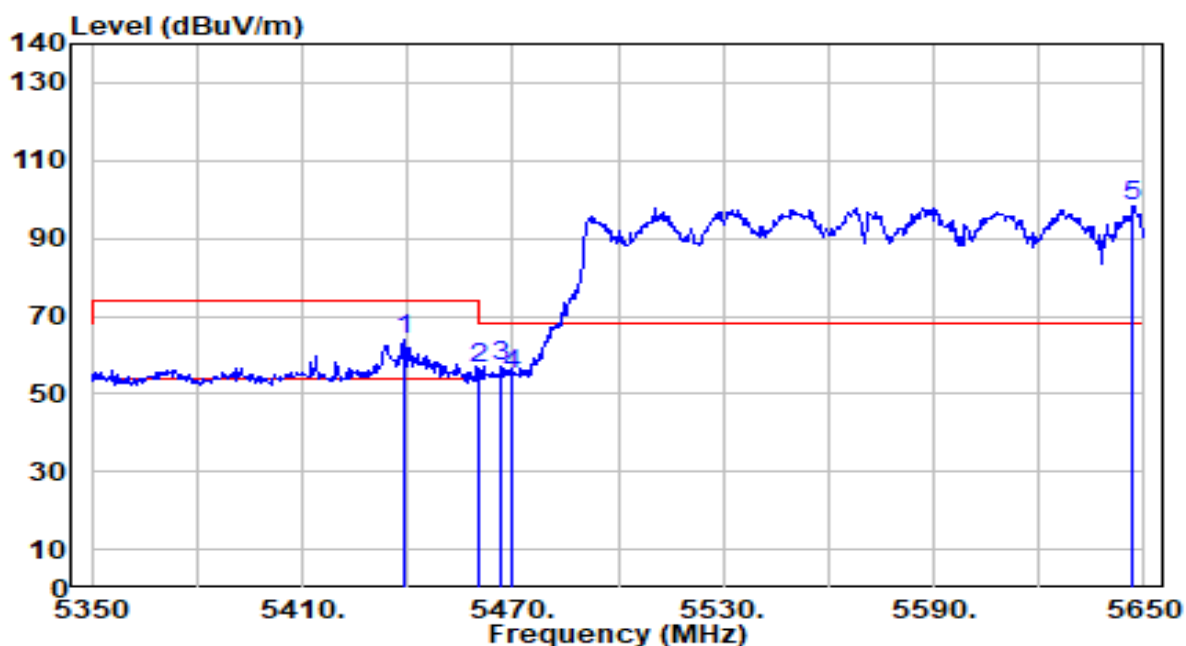


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5438.800	61.68	2.01	63.68	-10.32	74.00	222	78	Peak
2		5460.000	54.51	2.07	56.58	-17.42	74.00	222	78	Peak
3		5466.700	55.20	2.10	57.29	-10.91	68.20	222	78	Peak
4		5470.000	52.84	2.11	54.95	-13.25	68.20	222	78	Peak
5		5646.700	95.47	2.84	98.31	N/A	N/A	222	78	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-06-25
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_TX_Band3_CH 114_ANT 6+7	Test Voltage	By Notebook PC

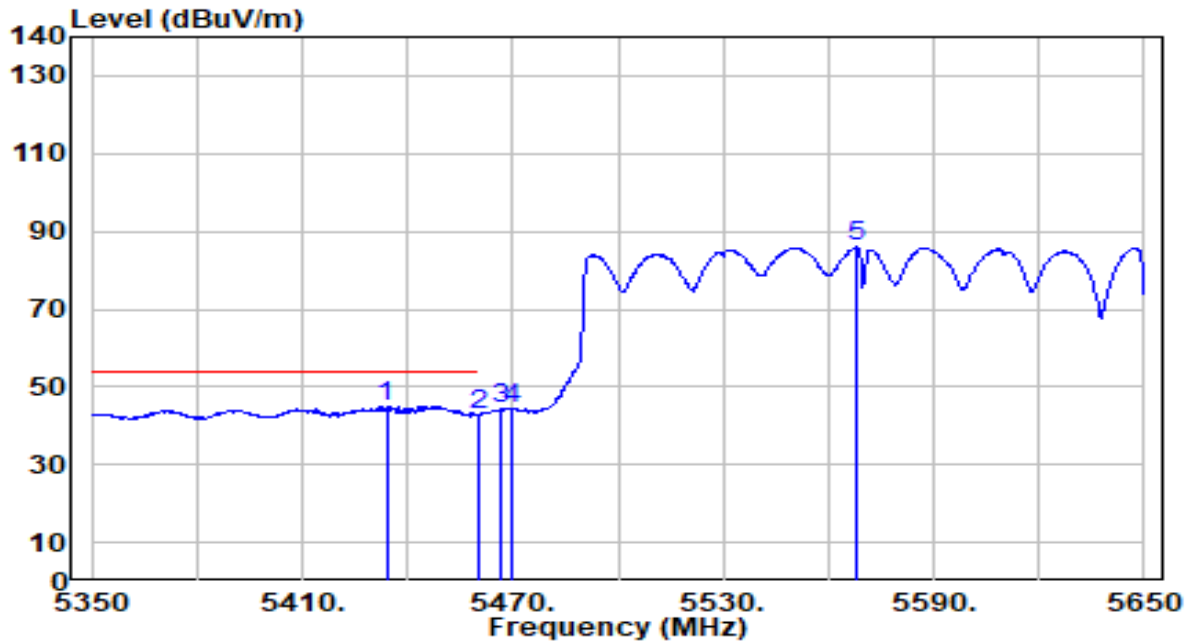


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5434.000	43.12	1.99	45.11	-8.89	54.00	222	78	Average
2		5460.000	40.66	2.07	42.74	-11.26	54.00	222	78	Average
3		5466.400	42.39	2.09	44.48	N/A	N/A	222	78	Average
4		5470.000	42.02	2.11	44.12	N/A	N/A	222	78	Average
5		5567.800	83.39	2.47	85.85	N/A	N/A	222	78	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band1_26Tone_RU0_CH 36_ANT 6+7	Test Voltage	By Notebook PC

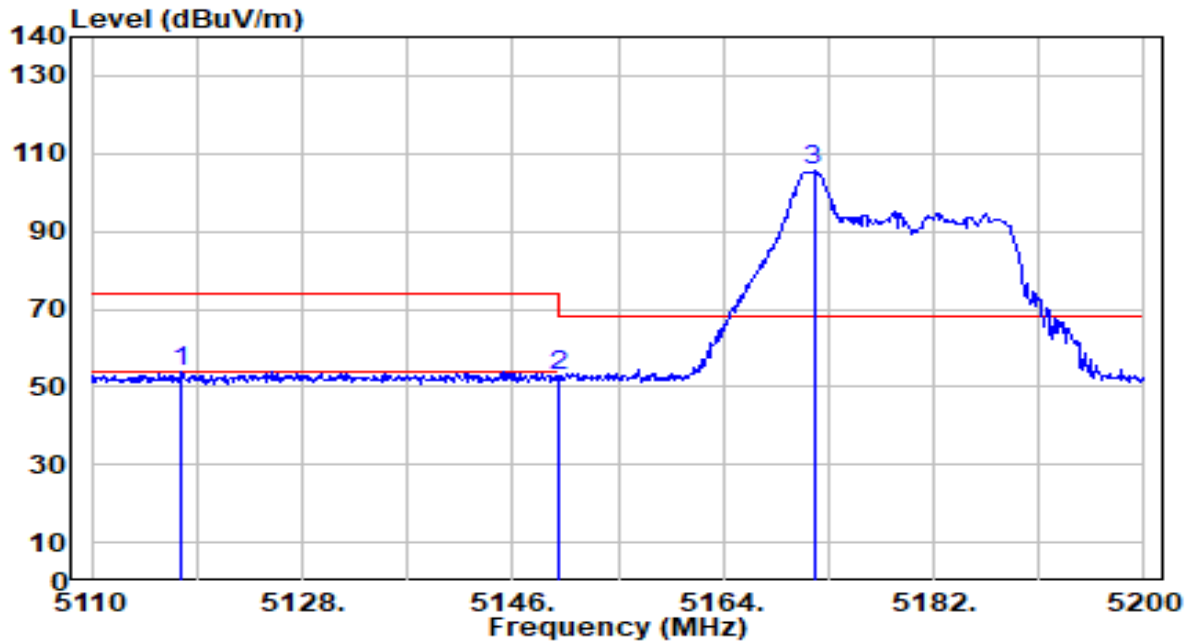


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5117.740	51.80	1.92	53.71	-20.29	74.00	100	11	Peak
2		5150.000	50.81	1.94	52.75	-21.25	74.00	100	11	Peak
3		5171.740	103.48	1.95	105.43	N/A	N/A	100	11	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band1_26Tone_RU0_CH 36_ANT 6+7	Test Voltage	By Notebook PC

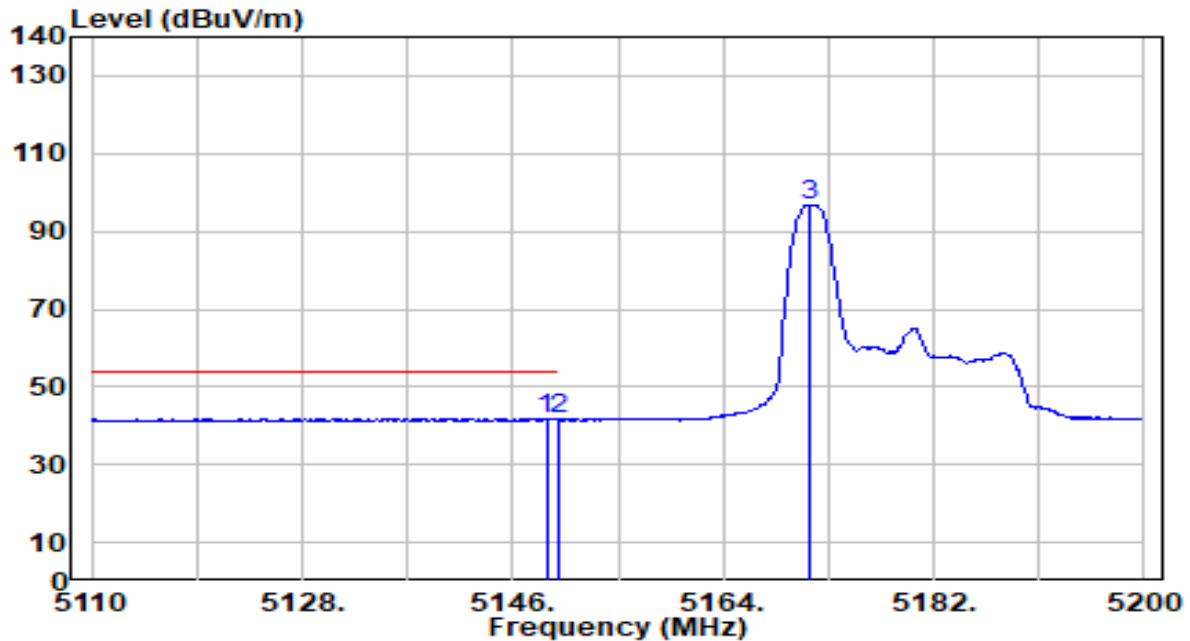


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.880	39.87	1.94	41.81	-12.19	54.00	100	11	Average
2		5150.000	39.69	1.94	41.62	-12.38	54.00	100	11	Average
3		5171.290	94.98	1.95	96.92	N/A	N/A	100	11	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band1_26Tone_RU0_CH 36_ANT 6+7	Test Voltage	By Notebook PC

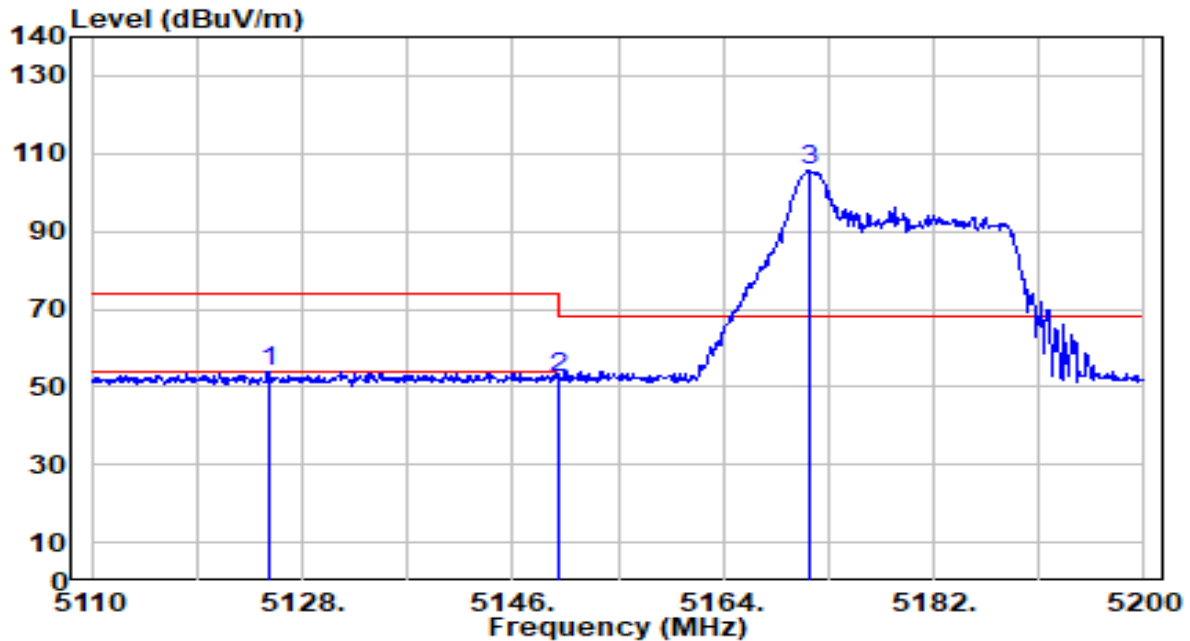


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5125.120	51.99	1.92	53.91	-20.09	74.00	349	44	Peak
2		5150.000	50.16	1.94	52.10	-21.90	74.00	349	44	Peak
3		5171.290	103.55	1.95	105.50	N/A	N/A	349	44	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band1_26Tone_RU0_CH 36_ANT 6+7	Test Voltage	By Notebook PC

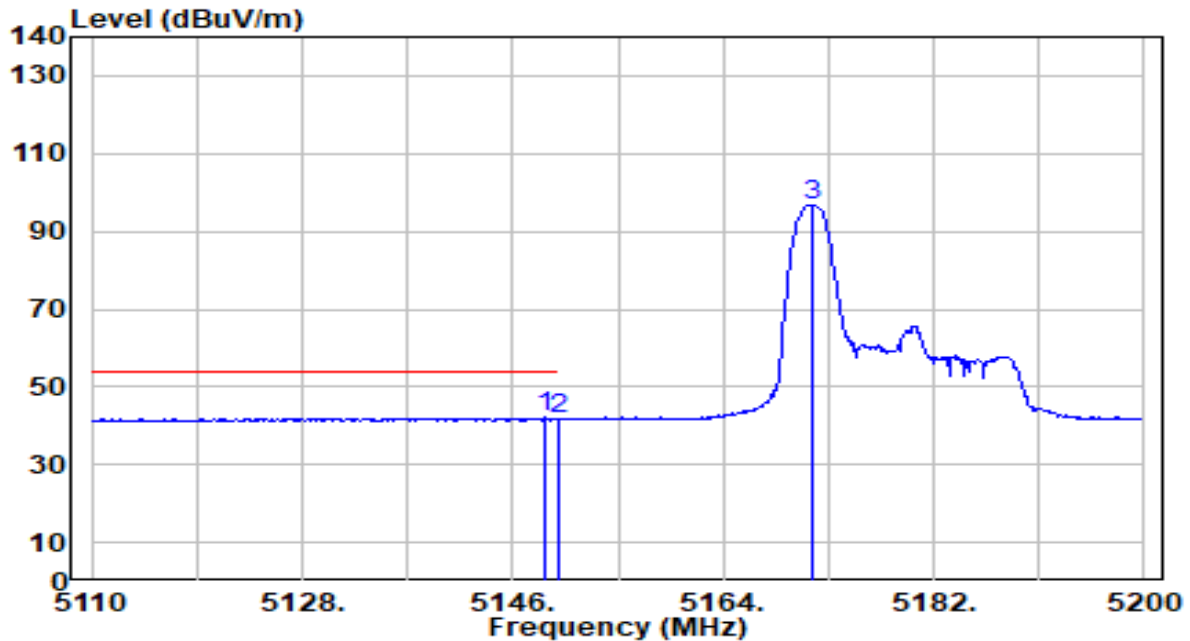


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.700	40.08	1.94	42.01	-11.99	54.00	349	44	Average
2		5150.000	39.82	1.94	41.76	-12.24	54.00	349	44	Average
3		5171.560	94.82	1.95	96.77	N/A	N/A	349	44	Average

Note:

1. " * ", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band1_52Tone_RU74_CH 36_ANT 6+7	Test Voltage	By Notebook PC

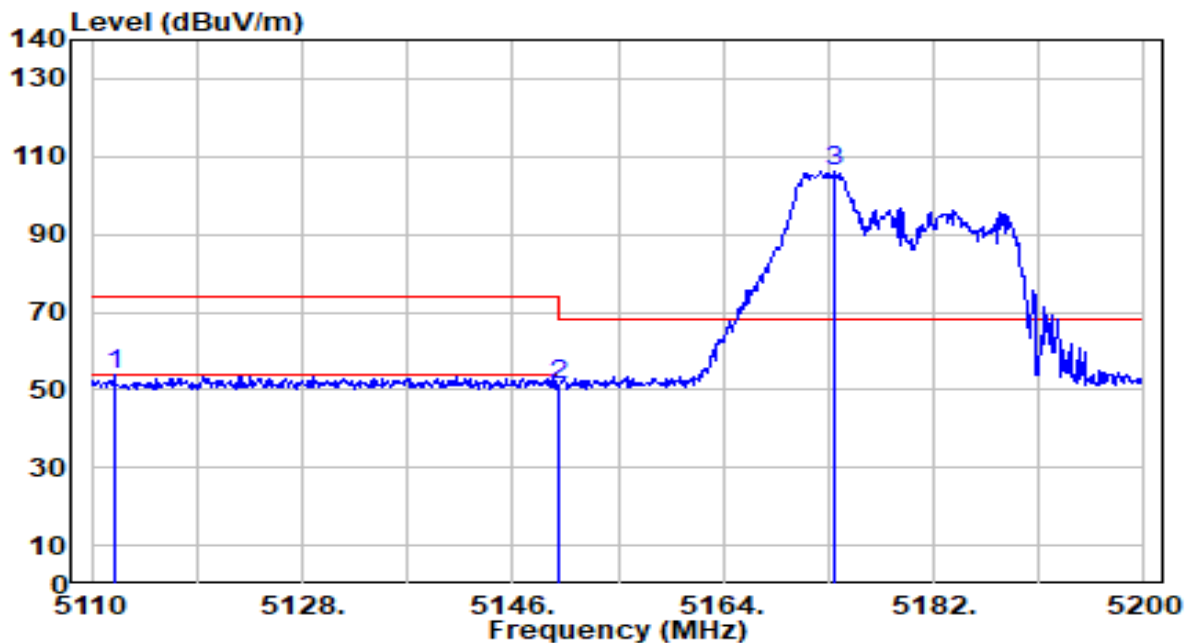


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5111.980	51.86	1.91	53.77	-20.23	74.00	100	0	Peak
2		5150.000	49.15	1.94	51.09	-22.91	74.00	100	0	Peak
3		5173.540	104.19	1.95	106.14	N/A	N/A	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band1_52Tone_RU74_CH 36_ANT 6+7	Test Voltage	By Notebook PC

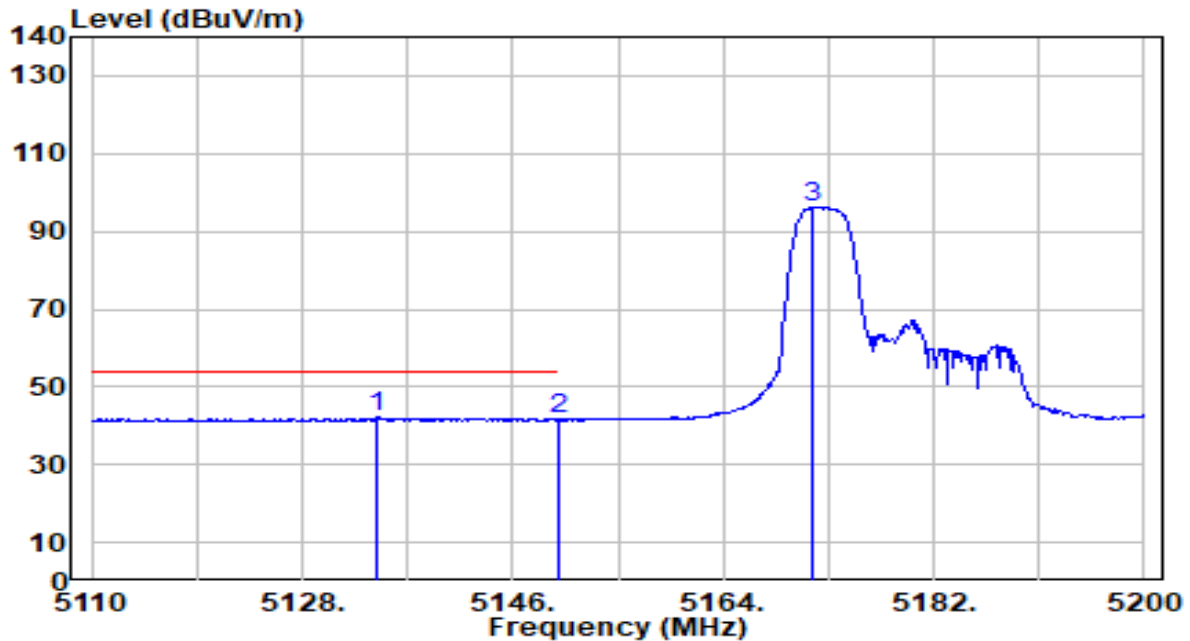


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5134.480	40.13	1.93	42.06	-11.94	54.00	100	0	Average
2		5150.000	39.77	1.94	41.71	-12.29	54.00	100	0	Average
3		5171.560	94.25	1.95	96.20	N/A	N/A	100	0	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band1_52Tone_RU74_CH 36_ANT 6+7	Test Voltage	By Notebook PC

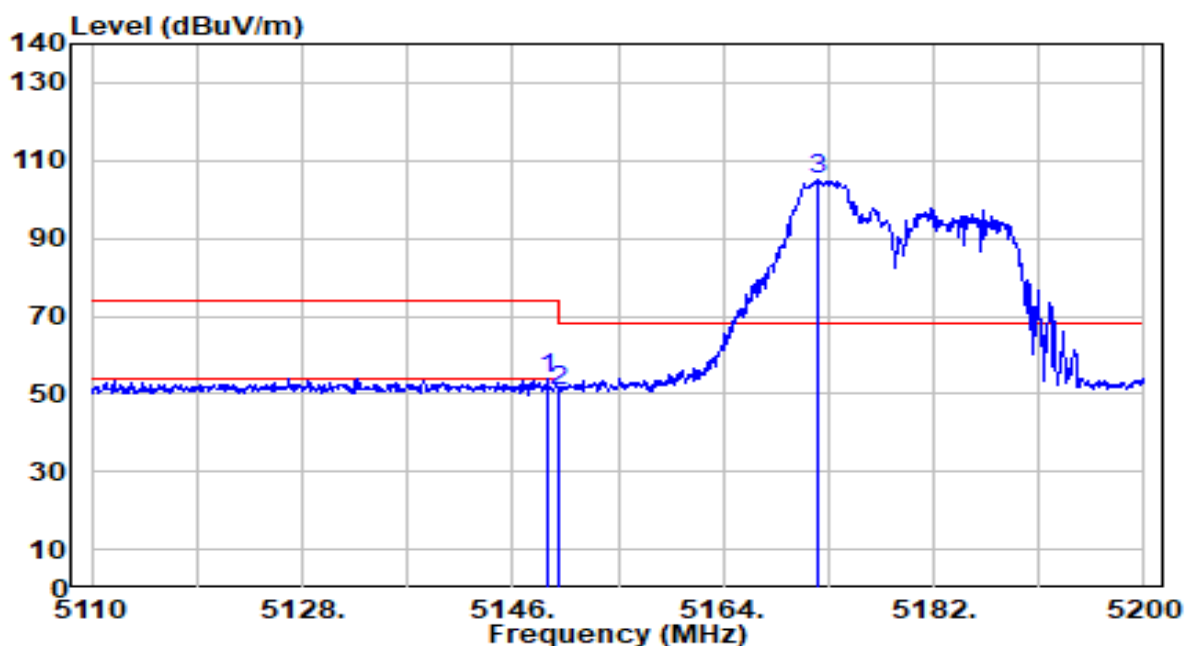


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.970	51.81	1.94	53.74	-20.26	74.00	282	52	Peak
2		5150.000	48.84	1.94	50.78	-23.22	74.00	282	52	Peak
3		5172.010	102.92	1.95	104.87	N/A	N/A	282	52	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band1_52Tone_RU74_CH 36_ANT 6+7	Test Voltage	By Notebook PC

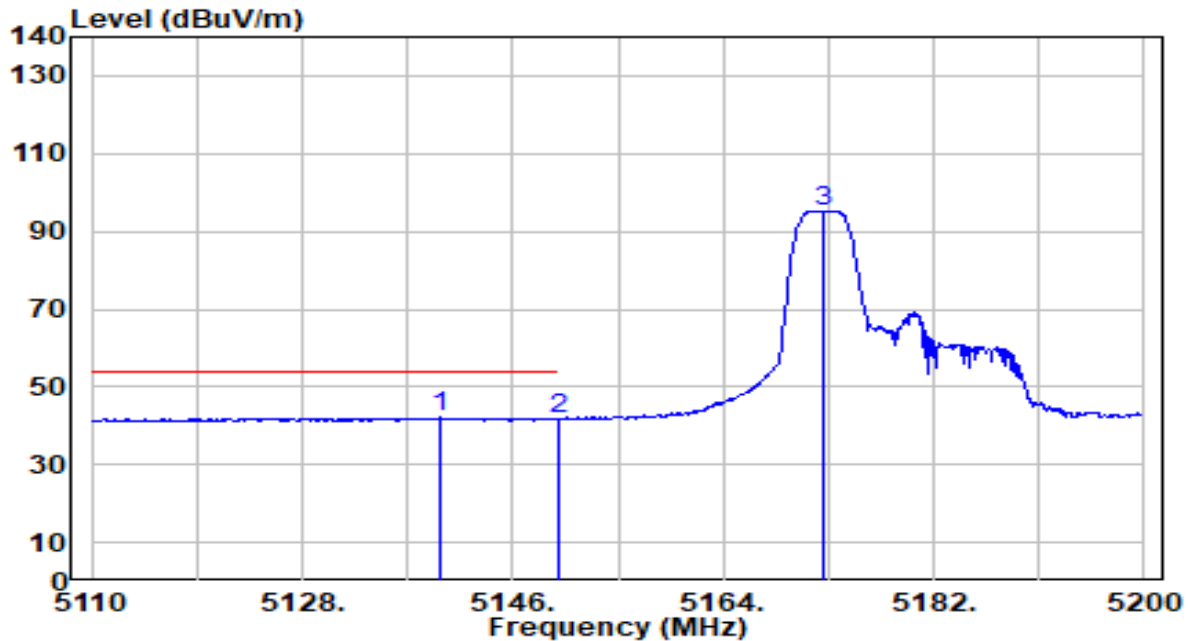


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5139.790	40.12	1.93	42.05	-11.95	54.00	282	52	Average
2		5150.000	39.87	1.94	41.81	-12.19	54.00	282	52	Average
3		5172.640	93.32	1.95	95.27	N/A	N/A	282	52	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band1_106Tone_RU106_CH 36_ANT 6+7	Test Voltage	By Notebook PC

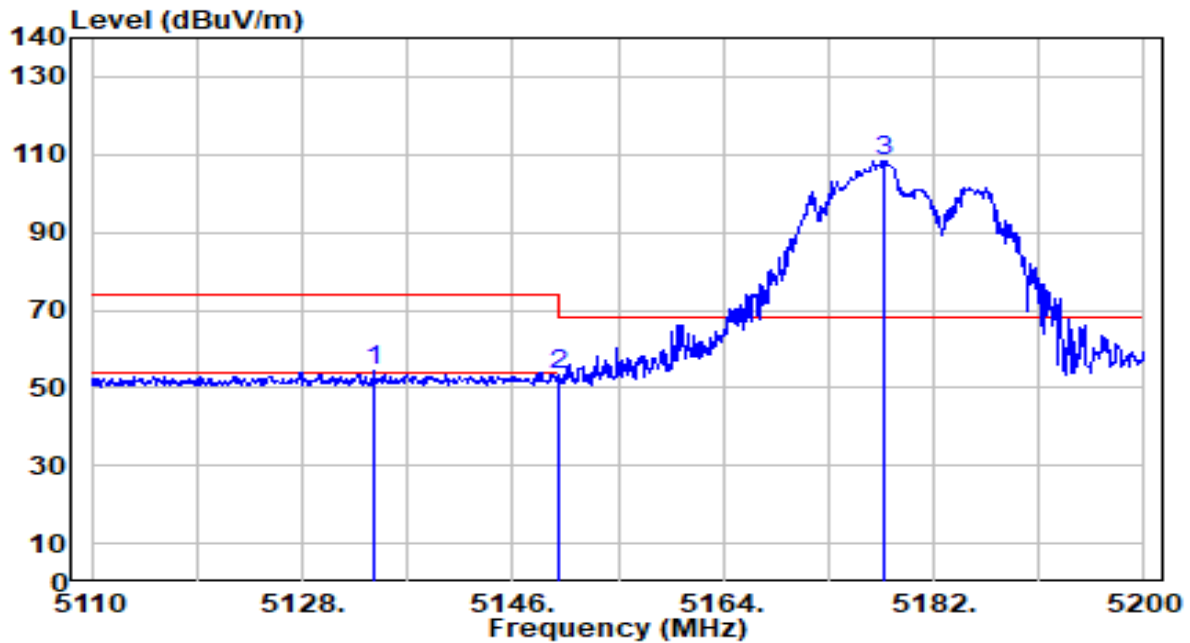


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5134.120	52.41	1.93	54.34	-19.66	74.00	195	132	Peak
2		5150.000	51.24	1.94	53.17	-20.83	74.00	195	132	Peak
3		5177.770	106.40	1.95	108.35	N/A	N/A	195	132	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band1_106Tone_RU106_CH 36_ANT 6+7	Test Voltage	By Notebook PC

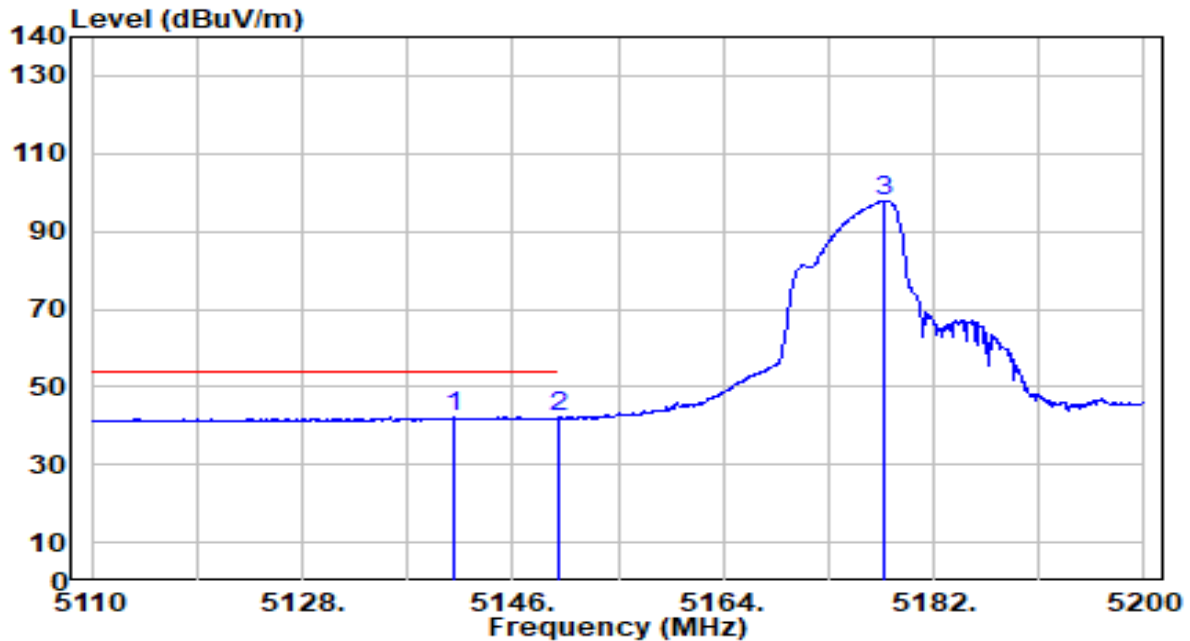


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5140.960	40.26	1.93	42.19	-11.81	54.00	195	132	Average
2		5150.000	40.22	1.94	42.16	-11.84	54.00	195	132	Average
3		5177.680	96.00	1.95	97.95	N/A	N/A	195	132	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band1_106Tone_RU106_CH 36_ANT 6+7	Test Voltage	By Notebook PC

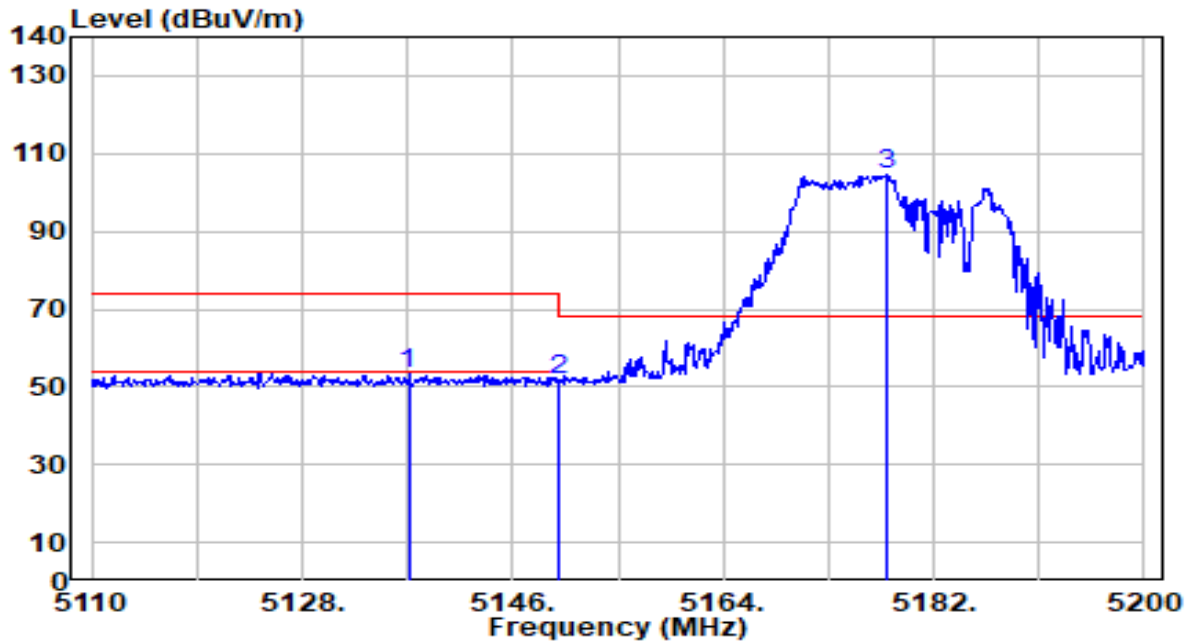


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5137.090	51.38	1.93	53.31	-20.69	74.00	298	66	Peak
2		5150.000	49.63	1.94	51.57	-22.43	74.00	298	66	Peak
3		5177.950	102.91	1.95	104.86	N/A	N/A	298	66	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band1_106Tone_RU106_CH 36_ANT 6+7	Test Voltage	By Notebook PC

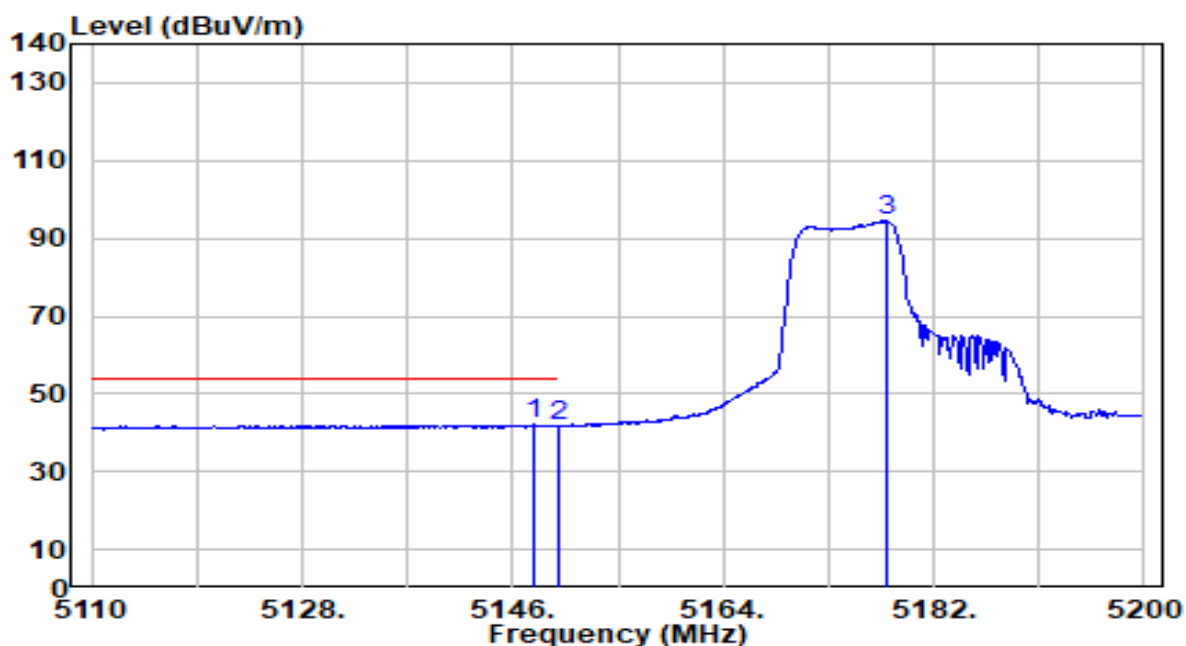


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.890	40.13	1.93	42.07	-11.93	54.00	298	66	Average
2		5150.000	39.59	1.94	41.52	-12.48	54.00	298	66	Average
3		5178.040	92.54	1.95	94.49	N/A	N/A	298	66	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band1_242Tone_RU122_CH 36_ANT 6+7	Test Voltage	By Notebook PC

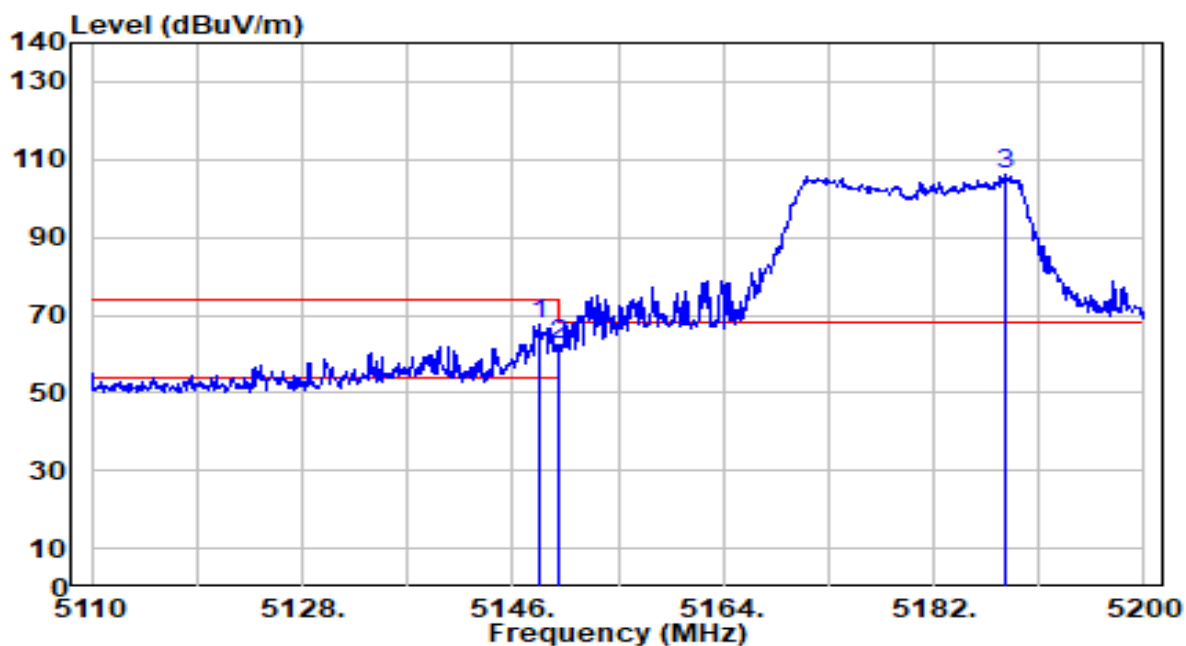


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.250	65.58	1.93	67.51	-6.49	74.00	100	11	Peak
2		5150.000	60.18	1.94	62.12	-11.88	74.00	100	11	Peak
3		5188.030	104.45	1.96	106.41	N/A	N/A	100	11	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band1_242Tone_RU122_CH 36_ANT 6+7	Test Voltage	By Notebook PC

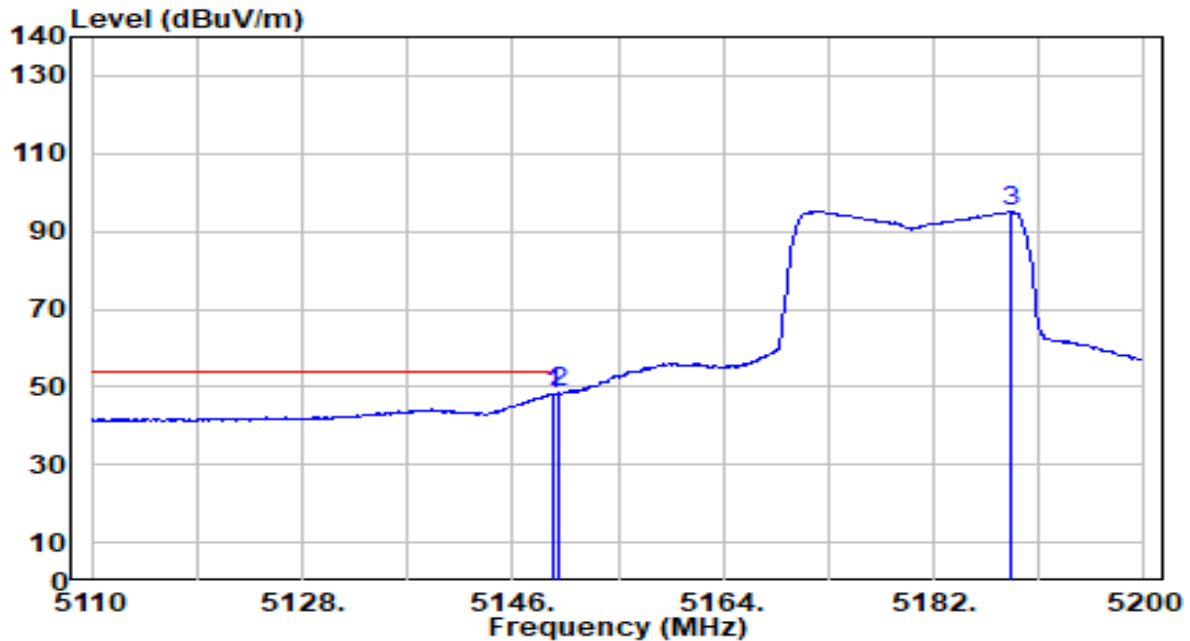


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5149.420	46.33	1.94	48.26	-5.74	54.00	100	11	Average
2	*	5150.000	46.50	1.94	48.43	-5.57	54.00	100	11	Average
3		5188.660	93.12	1.96	95.08	N/A	N/A	100	11	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band1_242Tone_RU122_CH 36_ANT 6+7	Test Voltage	By Notebook PC

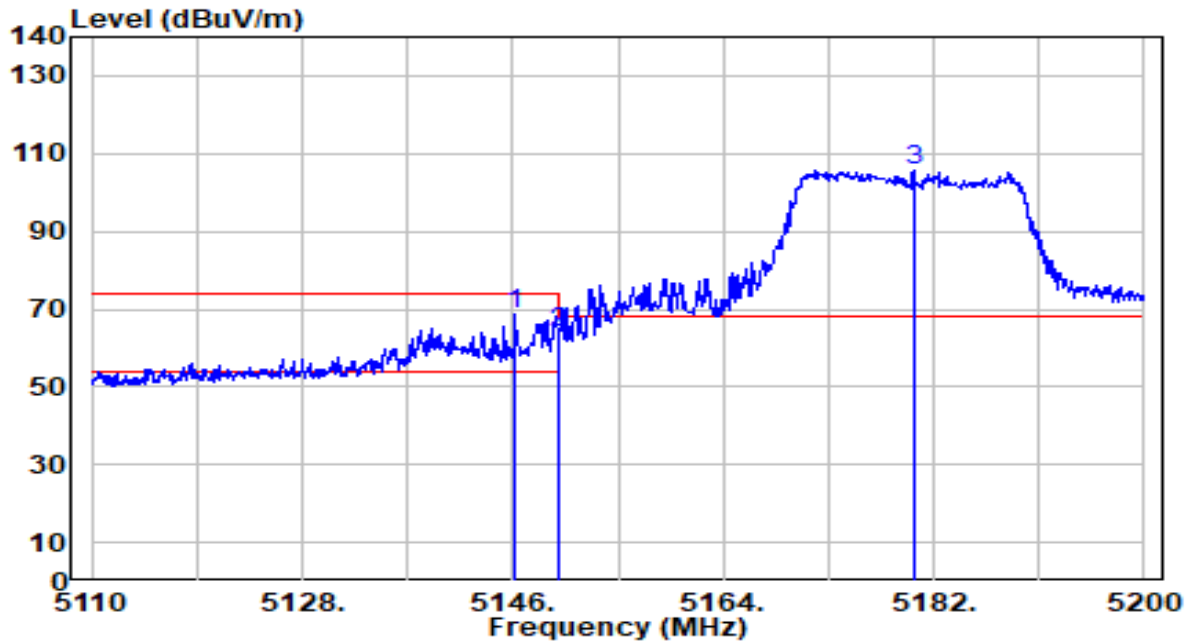


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5146.270	66.94	1.93	68.87	-5.13	74.00	349	44	Peak
2		5150.000	62.13	1.94	64.07	-9.93	74.00	349	44	Peak
3		5180.290	103.58	1.96	105.53	N/A	N/A	349	44	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band1_242Tone_RU122_CH 36_ANT 6+7	Test Voltage	By Notebook PC

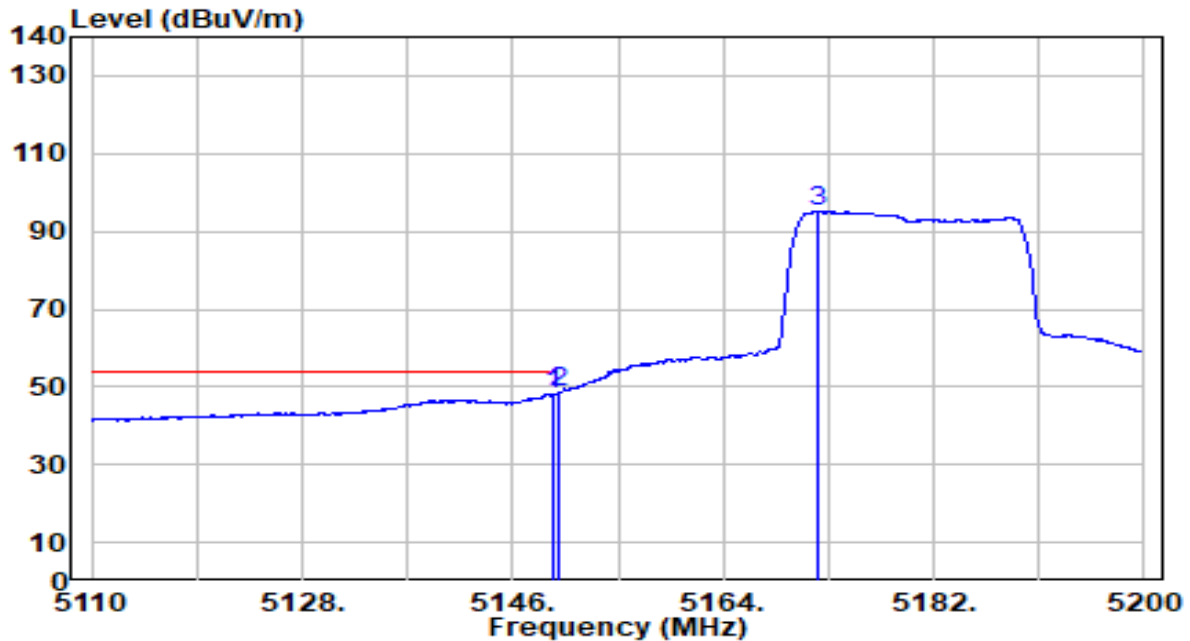


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5149.420	46.15	1.94	48.08	-5.92	54.00	349	44	Average
2	*	5150.000	46.68	1.94	48.61	-5.39	54.00	349	44	Average
3		5172.100	93.07	1.95	95.02	N/A	N/A	349	44	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band2_26Tone_RU8_CH 64_ANT 6+7	Test Voltage	By Notebook PC

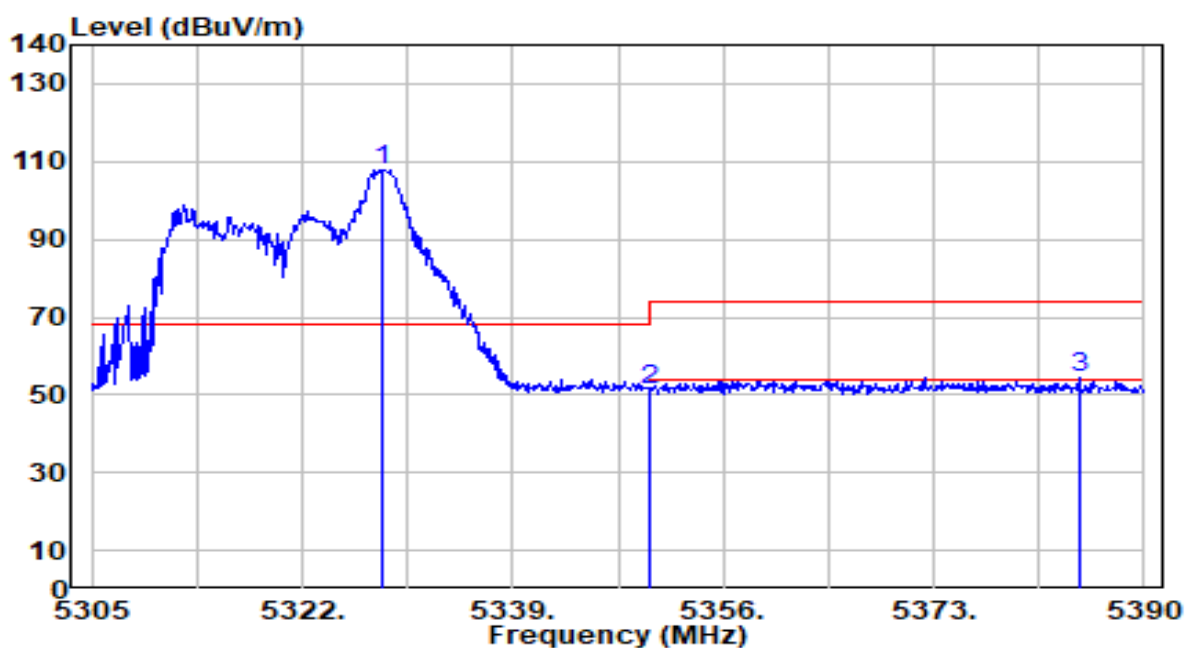


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5328.545	106.10	1.91	108.01	N/A	N/A	100	0	Peak
2	5350.000	49.43	1.90	51.33	-22.67	74.00	100	0	Peak
3	* 5384.730	52.67	1.89	54.56	-19.44	74.00	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band2_26Tone_RU8_CH 64_ANT 6+7	Test Voltage	By Notebook PC

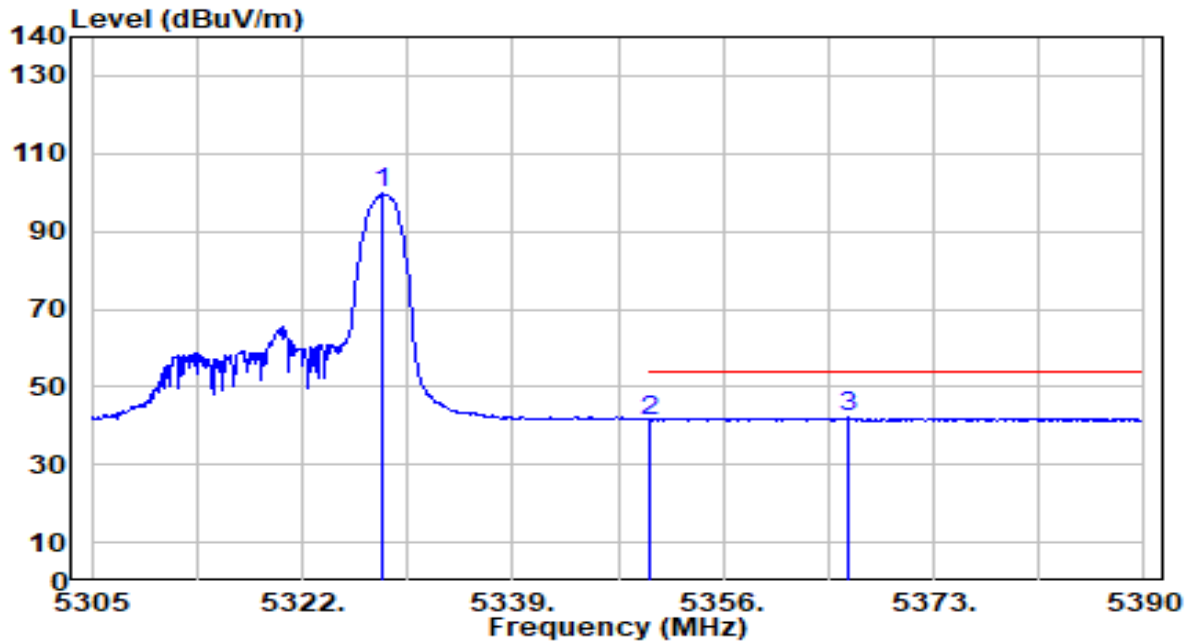


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5328.545	97.77	1.91	99.68	N/A	N/A	100	0	Average
2	5350.000	39.54	1.90	41.44	-12.56	54.00	100	0	Average
3	* 5366.115	40.14	1.90	42.04	-11.96	54.00	100	0	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band2_26Tone_RU8_CH 64_ANT 6+7	Test Voltage	By Notebook PC

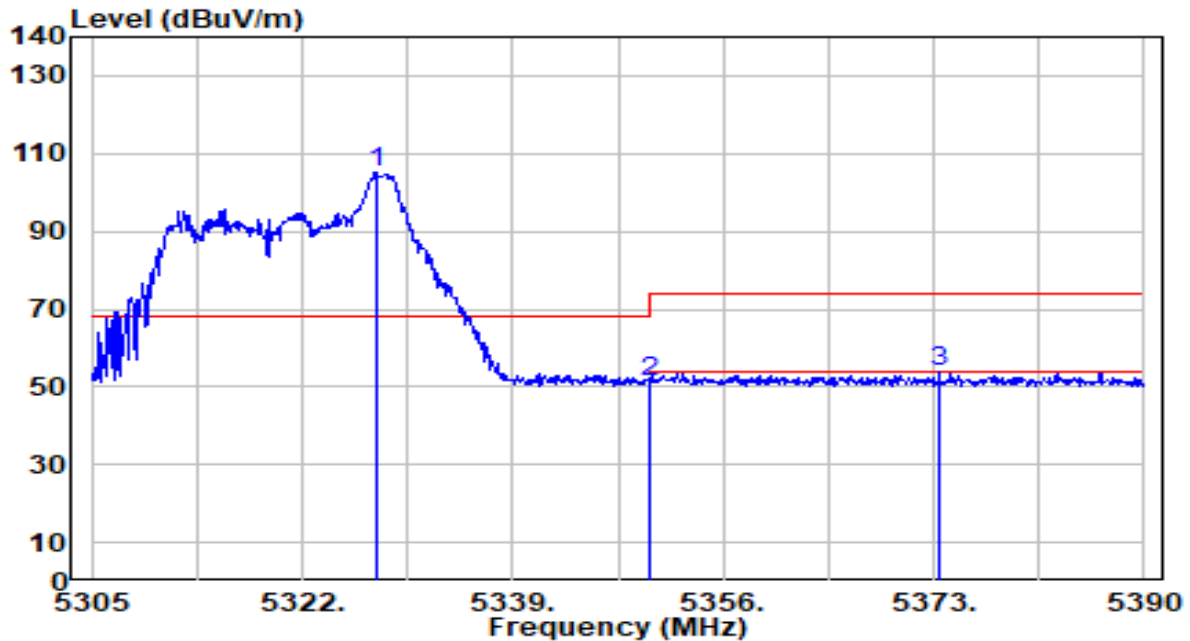


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5327.950	103.25	1.91	105.16	N/A	N/A	290	46	Peak
2	5350.000	49.59	1.90	51.49	-22.51	74.00	290	46	Peak
3	* 5373.425	52.05	1.90	53.95	-20.05	74.00	290	46	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band2_26Tone_RU8_CH 64_ANT 6+7	Test Voltage	By Notebook PC

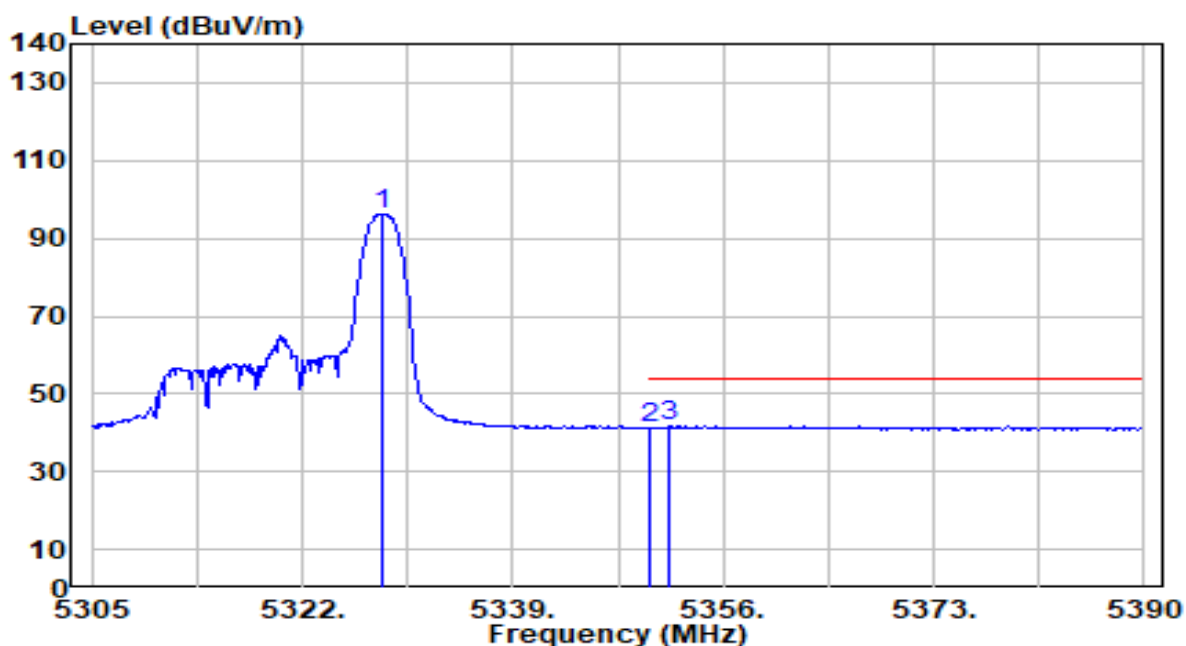


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5328.460	94.50	1.91	96.41	N/A	N/A	290	46	Average
2	5350.000	39.46	1.90	41.36	-12.64	54.00	290	46	Average
3	* 5351.665	39.95	1.90	41.85	-12.15	54.00	290	46	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band2_52Tone_RU77_CH 64_ANT 6+7	Test Voltage	By Notebook PC

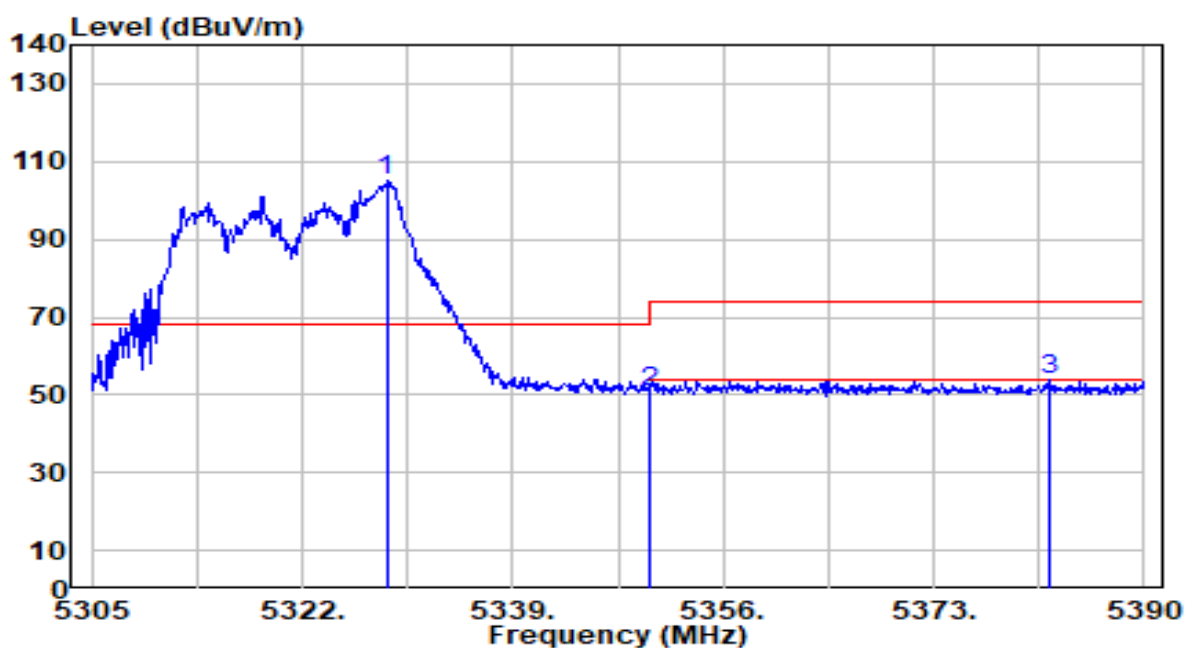


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5328.800	103.24	1.91	105.15	N/A	N/A	100	83	Peak
2	5350.000	48.85	1.90	50.75	-23.25	74.00	100	83	Peak
3	* 5382.435	51.95	1.89	53.84	-20.16	74.00	100	83	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band2_52Tone_RU77_CH 64_ANT 6+7	Test Voltage	By Notebook PC

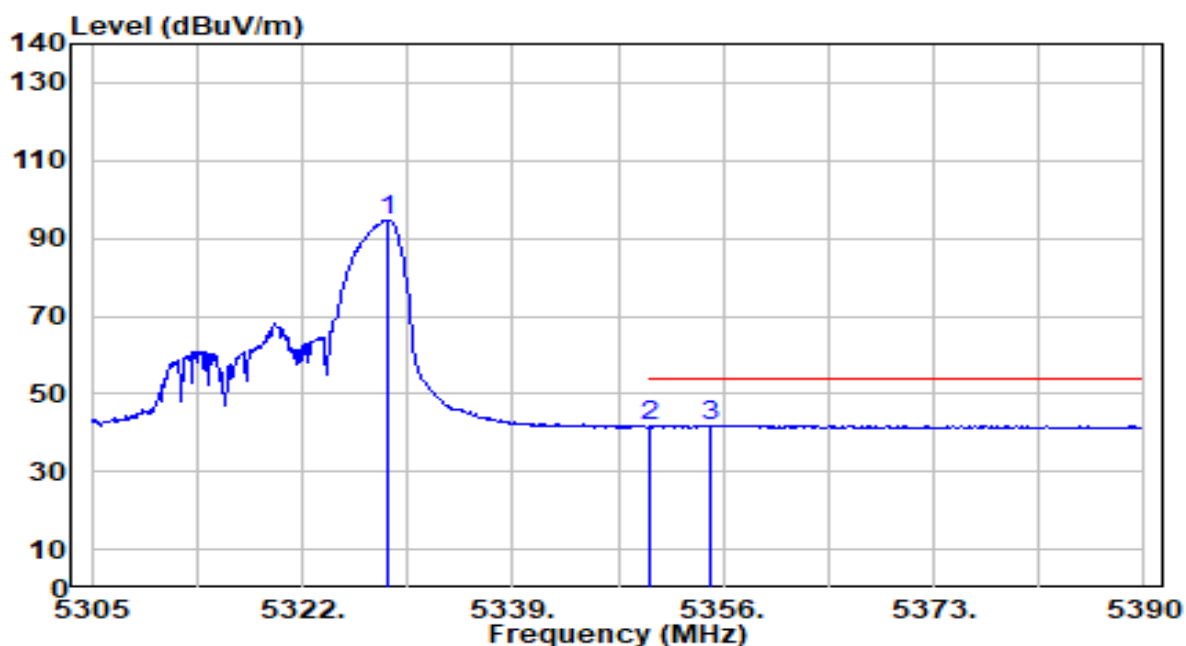


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5328.970	92.79	1.91	94.70	N/A	N/A	100	83	Average
2	5350.000	39.74	1.90	41.64	-12.36	54.00	100	83	Average
3	* 5354.980	40.05	1.90	41.95	-12.05	54.00	100	83	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band2_52Tone_RU77_CH 64_ANT 6+7	Test Voltage	By Notebook PC

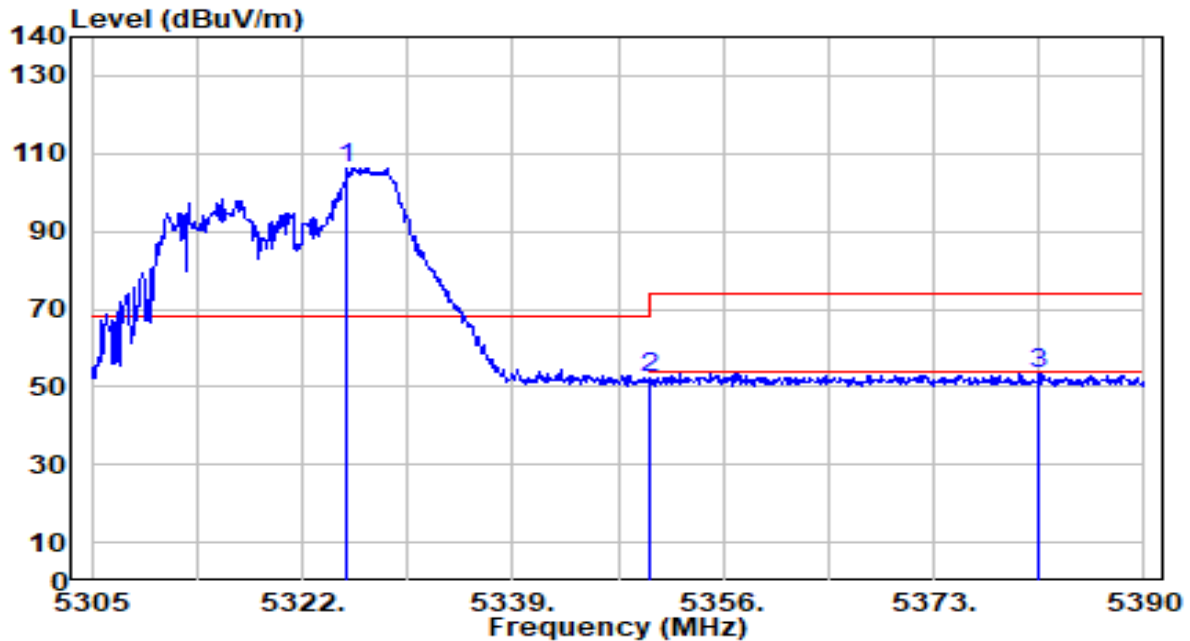


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5325.655	104.25	1.91	106.16	N/A	N/A	324	52	Peak
2	5350.000	50.48	1.90	52.39	-21.61	74.00	324	52	Peak
3	* 5381.500	51.71	1.89	53.60	-20.40	74.00	324	52	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band2_52Tone_RU77_CH 64_ANT 6+7	Test Voltage	By Notebook PC

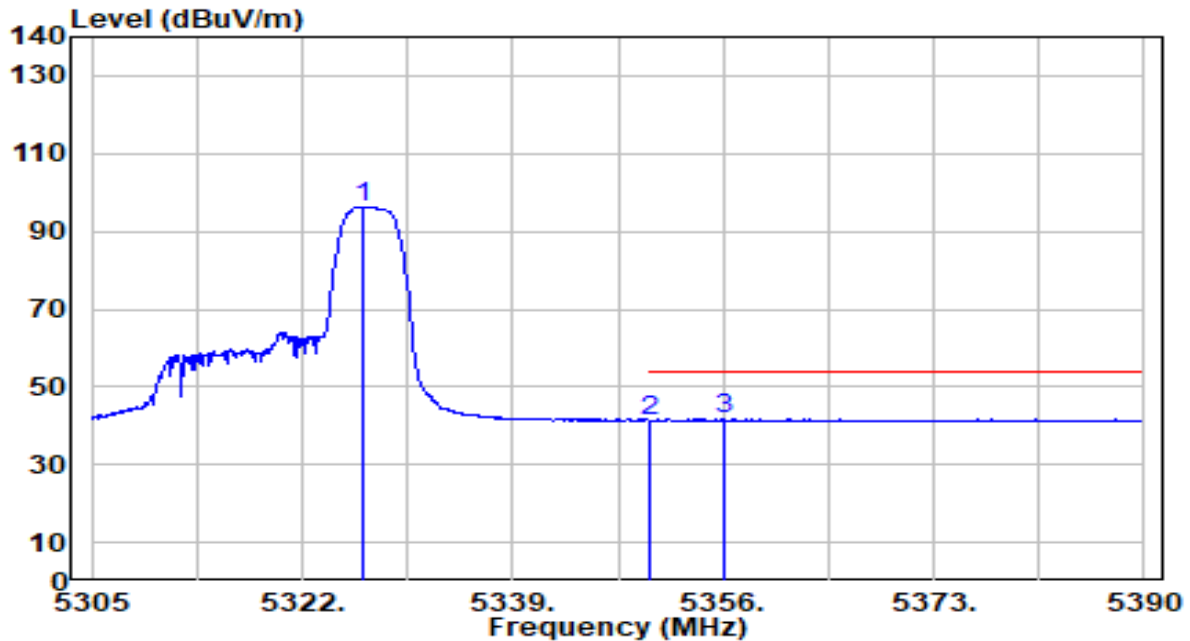


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5326.845	94.30	1.91	96.21	N/A	N/A	324	52	Average
2	5350.000	39.29	1.90	41.19	-12.81	54.00	324	52	Average
3	* 5356.085	39.79	1.90	41.69	-12.31	54.00	324	52	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band2_106Tone_RU107_CH 64_ANT 6+7	Test Voltage	By Notebook PC

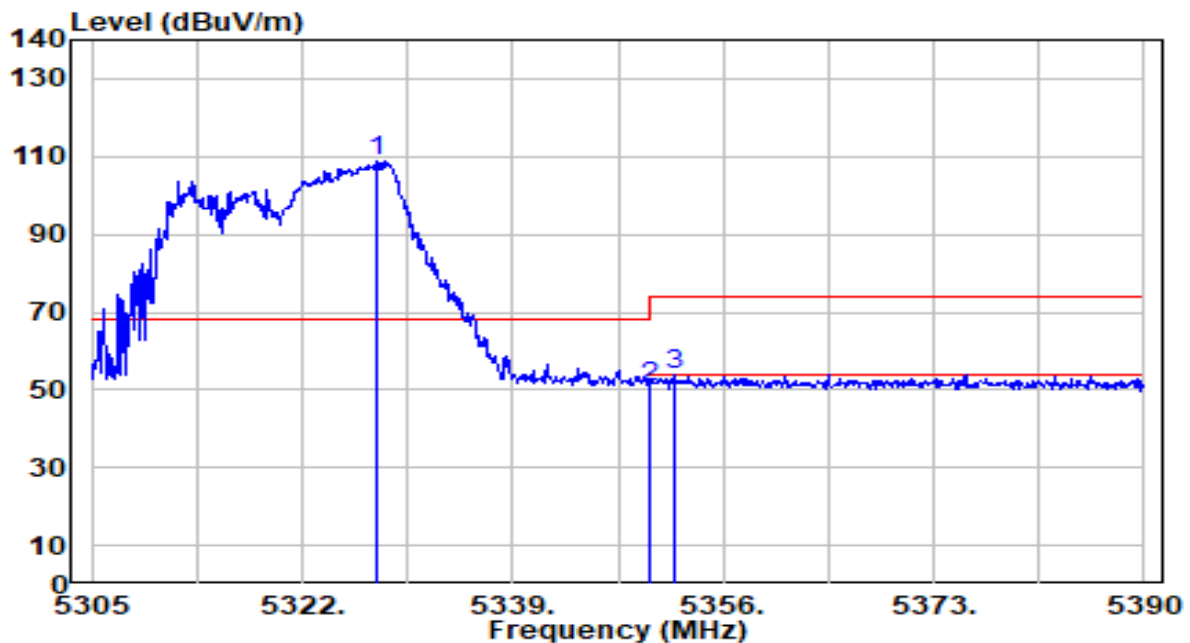


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5327.950	106.99	1.91	108.91	N/A	N/A	100	0	Peak
2	5350.000	48.68	1.90	50.58	-23.42	74.00	100	0	Peak
3	* 5352.175	51.98	1.90	53.89	-20.11	74.00	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band2_106Tone_RU107_CH 64_ANT 6+7	Test Voltage	By Notebook PC

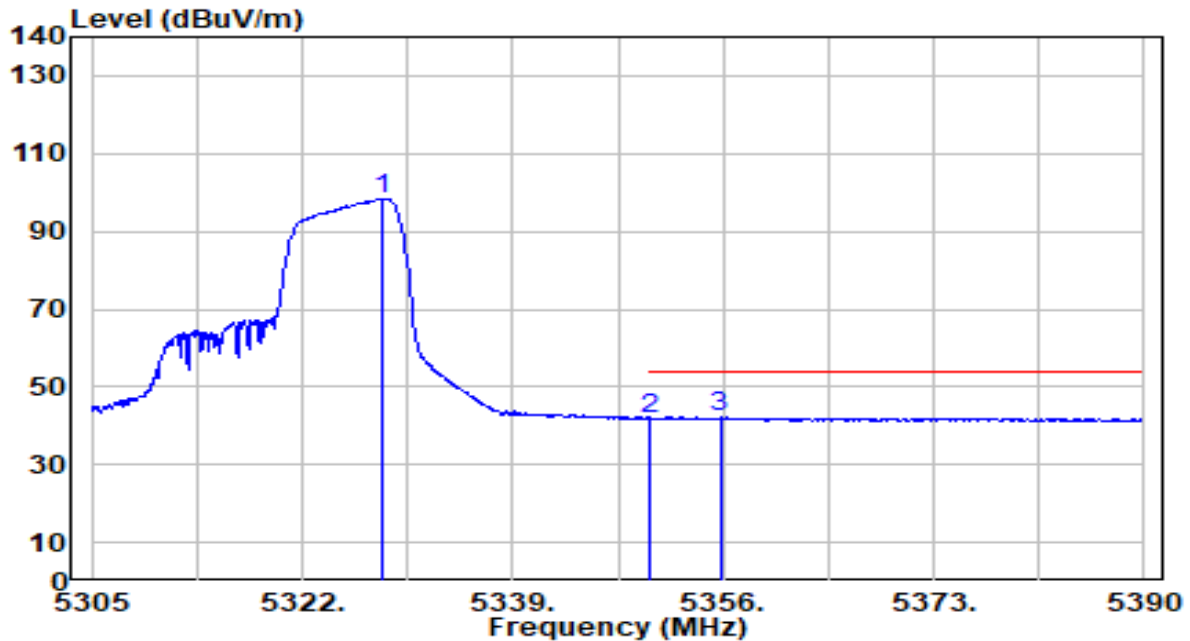


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5328.460	96.51	1.91	98.43	N/A	N/A	100	0	Average
2	5350.000	40.09	1.90	41.99	-12.01	54.00	100	0	Average
3	* 5355.745	40.20	1.90	42.10	-11.90	54.00	100	0	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band2_106Tone_RU107_CH 64_ANT 6+7	Test Voltage	By Notebook PC

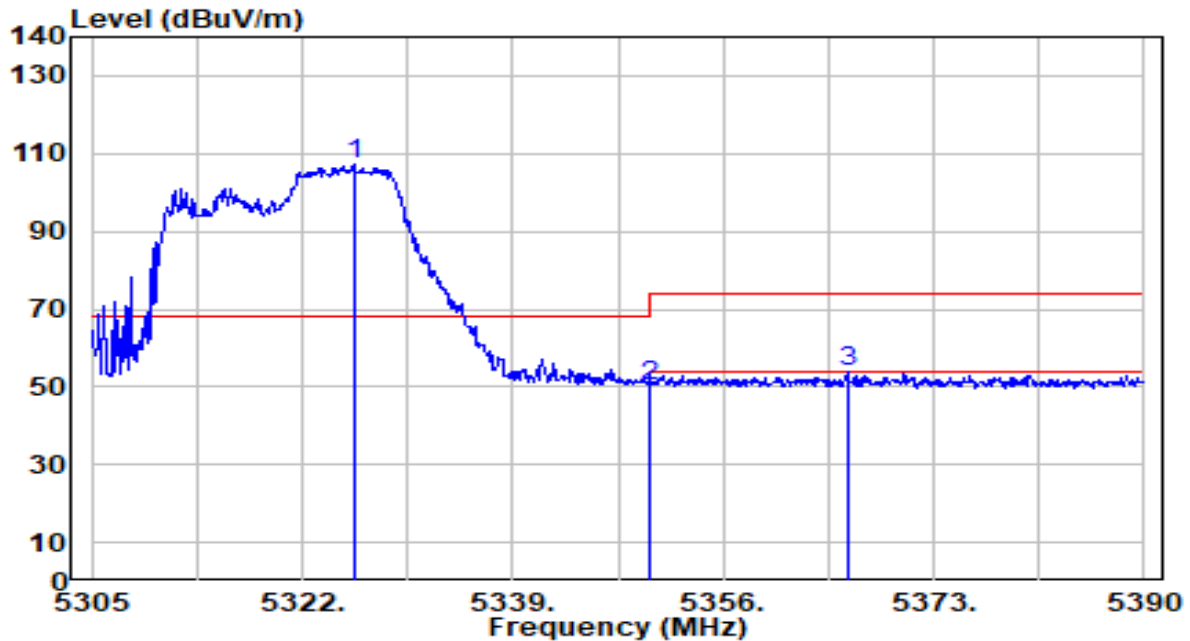


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5326.165	105.22	1.91	107.13	N/A	N/A	290	46	Peak
2	5350.000	48.24	1.90	50.14	-23.86	74.00	290	46	Peak
3	* 5366.030	52.03	1.90	53.93	-20.07	74.00	290	46	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band2_106Tone_RU107_CH 64_ANT 6+7	Test Voltage	By Notebook PC

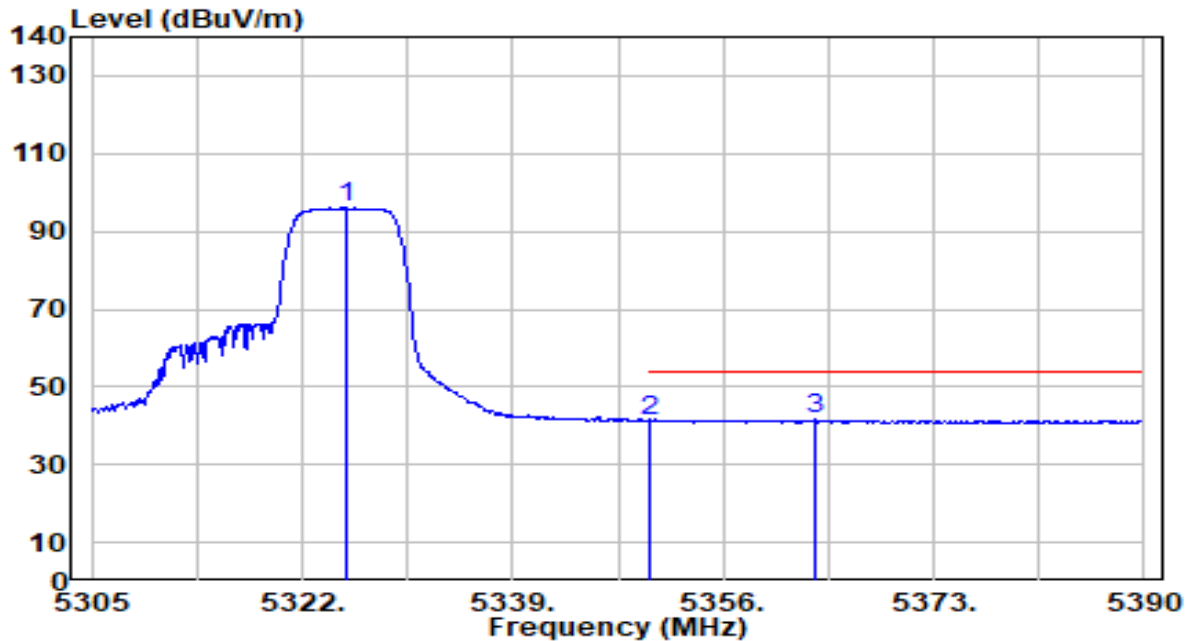


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5325.655	94.04	1.91	95.95	N/A	N/A	290	46	Average
2	5350.000	39.54	1.90	41.45	-12.55	54.00	290	46	Average
3	* 5363.395	39.66	1.90	41.56	-12.44	54.00	290	46	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band2_242Tone_RU122_CH 64_ANT 6+7	Test Voltage	By Notebook PC

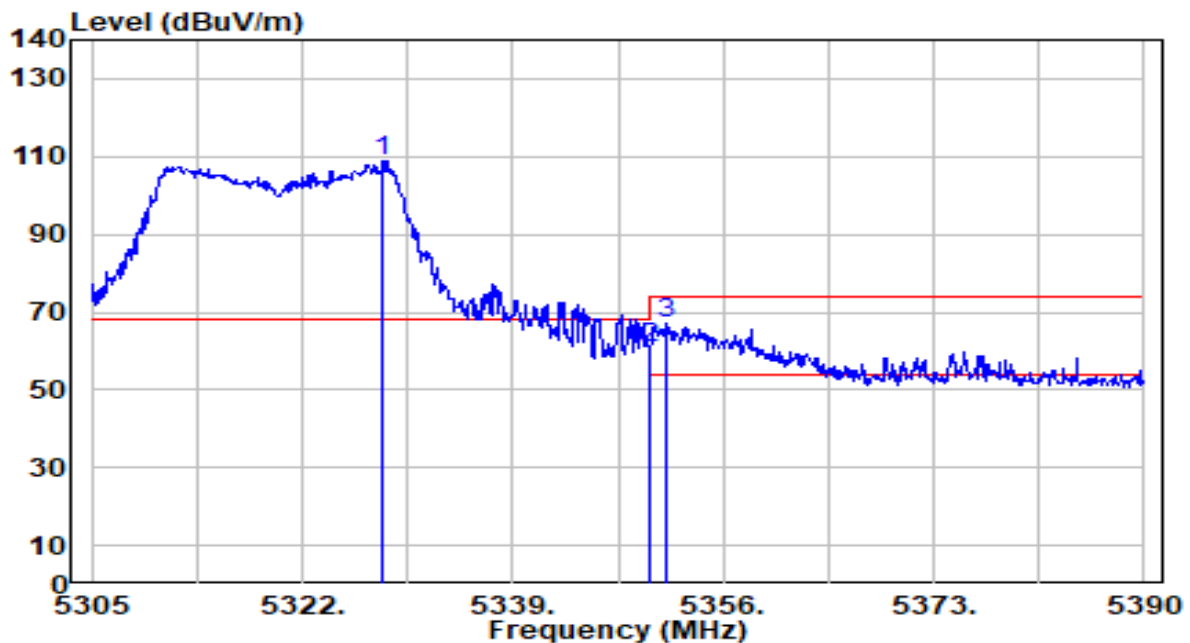


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5328.460	107.14	1.91	109.05	N/A	N/A	100	0	Peak
2	5350.000	58.66	1.90	60.56	-13.44	74.00	100	0	Peak
3	* 5351.325	65.02	1.90	66.92	-7.08	74.00	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band2_242Tone_RU122_CH 64_ANT 6+7	Test Voltage	By Notebook PC

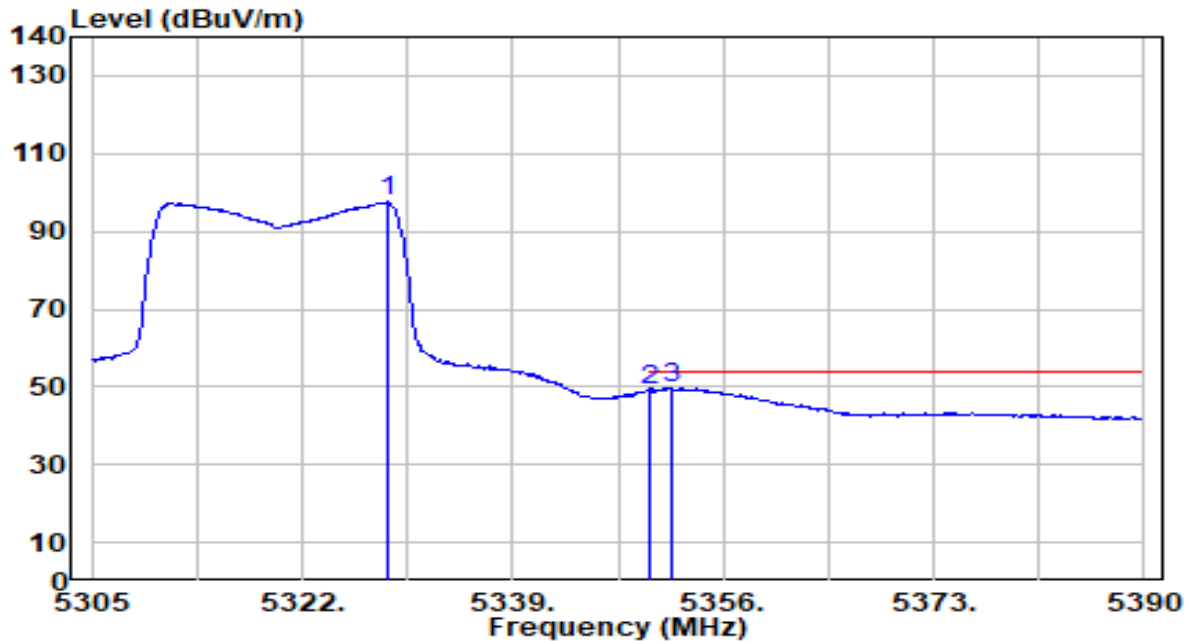


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5328.885	95.56	1.91	97.48	N/A	N/A	100	0	Average
2	5350.000	47.13	1.90	49.03	-4.97	54.00	100	0	Average
3	* 5351.750	47.86	1.90	49.76	-4.24	54.00	100	0	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band2_242Tone_RU122_CH 64_ANT 6+7	Test Voltage	By Notebook PC

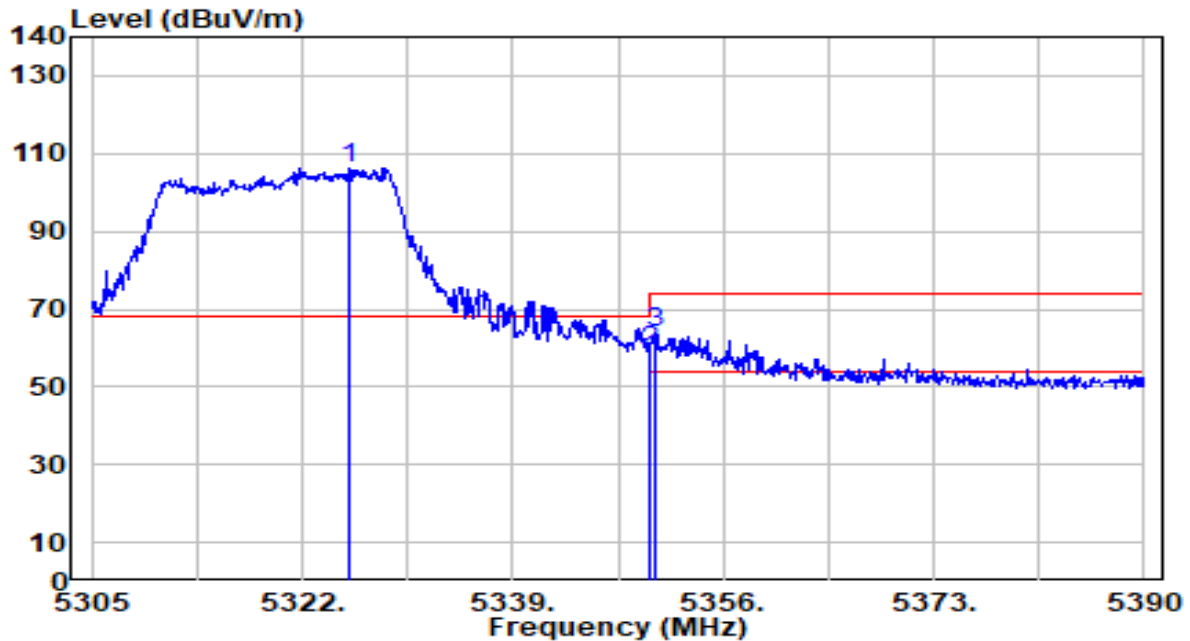


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5325.740	104.19	1.91	106.11	N/A	N/A	290	46	Peak
2	5350.000	57.32	1.90	59.23	-14.77	74.00	290	46	Peak
3	* 5350.560	62.19	1.90	64.09	-9.91	74.00	290	46	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band2_242Tone_RU122_CH 64_ANT 6+7	Test Voltage	By Notebook PC

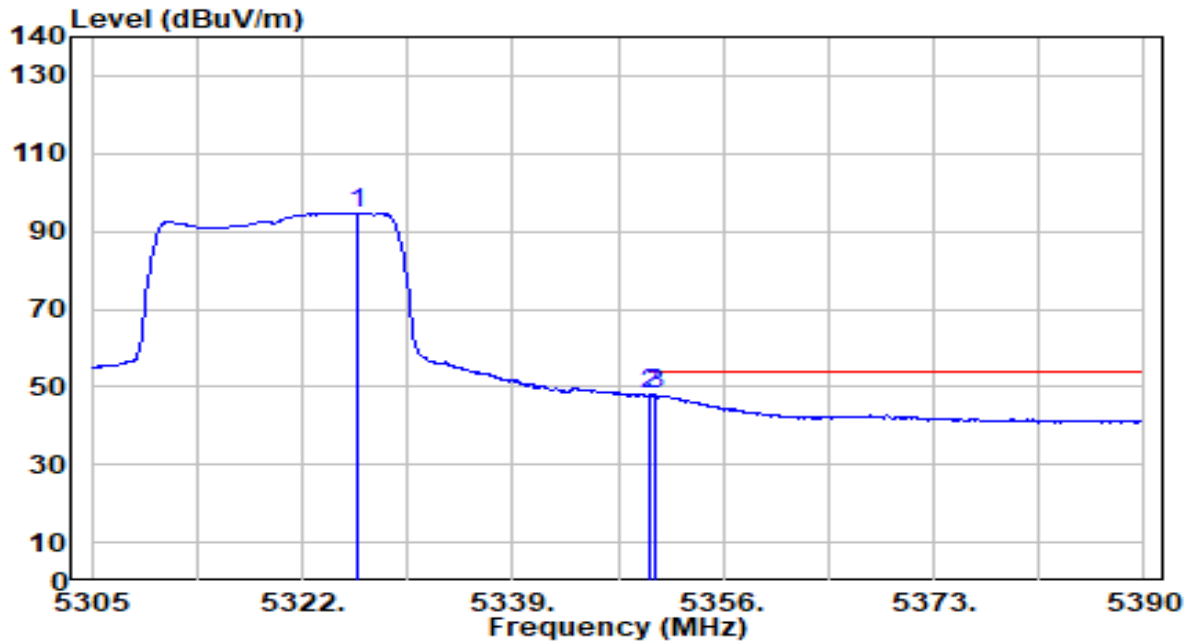


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5326.420	92.91	1.91	94.82	N/A	N/A	290	46	Average
2	5350.000	45.97	1.90	47.88	-6.12	54.00	290	46	Average
3	* 5350.560	46.00	1.90	47.90	-6.10	54.00	290	46	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band3_26Tone_RU0_CH 100_ANT 6+7	Test Voltage	By Notebook PC

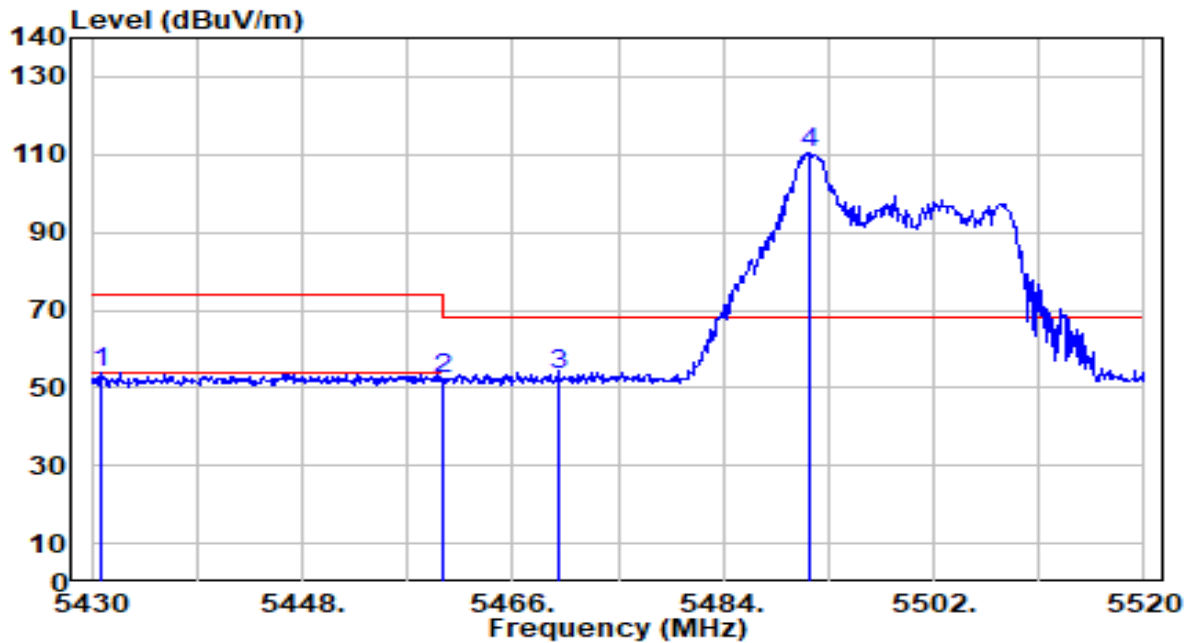


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5430.900	51.85	1.98	53.83	-20.17	74.00	127	360	Peak
2	5460.000	50.32	2.07	52.40	-21.60	74.00	127	360	Peak
3	* 5470.000	51.50	2.11	53.61	-14.59	68.20	127	360	Peak
4	5491.290	108.10	2.17	110.28	N/A	N/A	127	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band3_26Tone_RU0_CH 100_ANT 6+7	Test Voltage	By Notebook PC

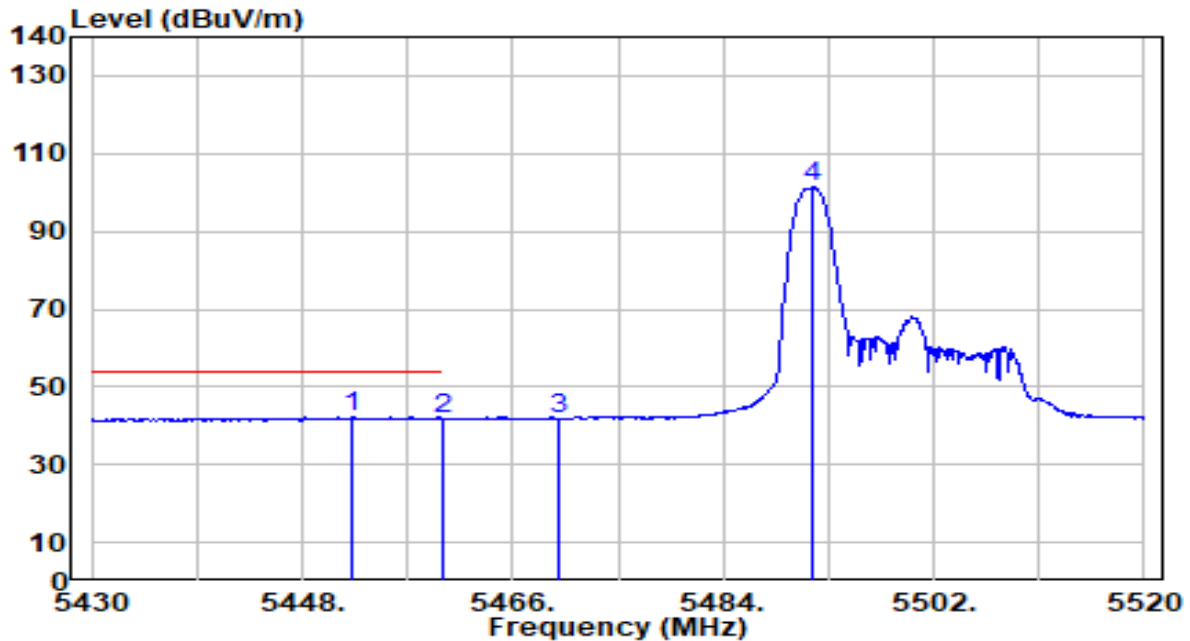


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5452.320	40.15	2.05	42.20	-11.80	54.00	127	360	Average
2		5460.000	39.75	2.07	41.82	-12.18	54.00	127	360	Average
3		5470.000	39.68	2.11	41.78	N/A	N/A	127	360	Average
4		5491.650	99.07	2.17	101.24	N/A	N/A	127	360	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band3_26Tone_RU0_CH 100_ANT 6+7	Test Voltage	By Notebook PC

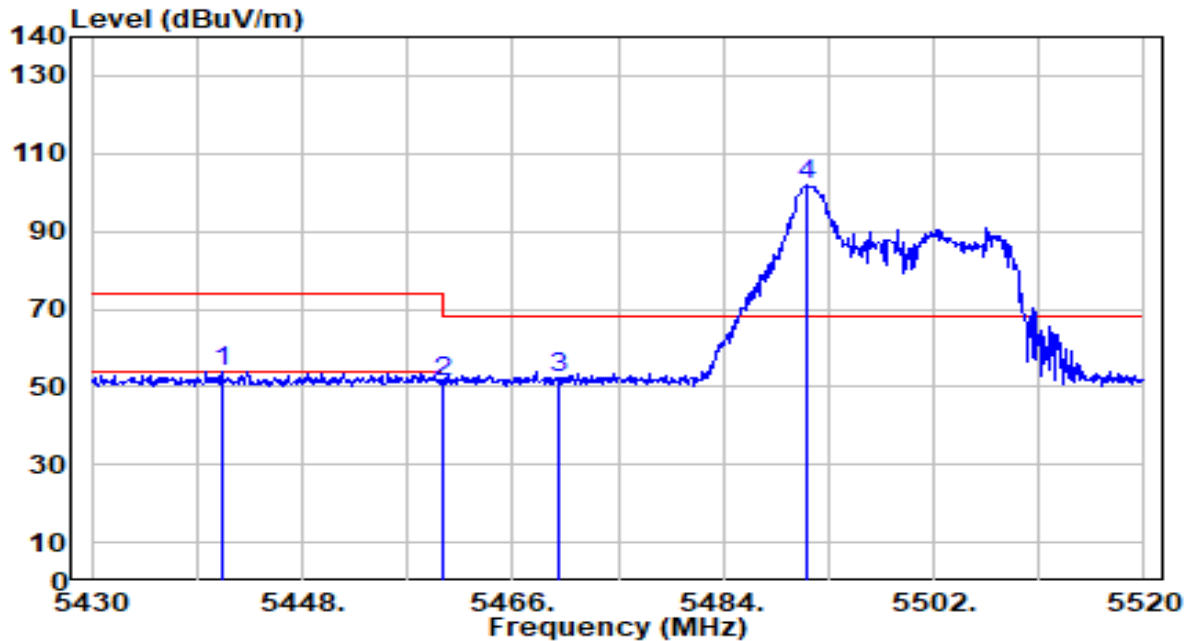


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5441.070	52.04	2.01	54.06	-19.94	74.00	293	36	Peak
2	5460.000	49.15	2.07	51.22	-22.78	74.00	293	36	Peak
3	* 5470.000	50.14	2.11	52.24	-15.96	68.20	293	36	Peak
4	5491.200	99.77	2.17	101.94	N/A	N/A	293	36	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band3_26Tone_RU0_CH 100_ANT 6+7	Test Voltage	By Notebook PC

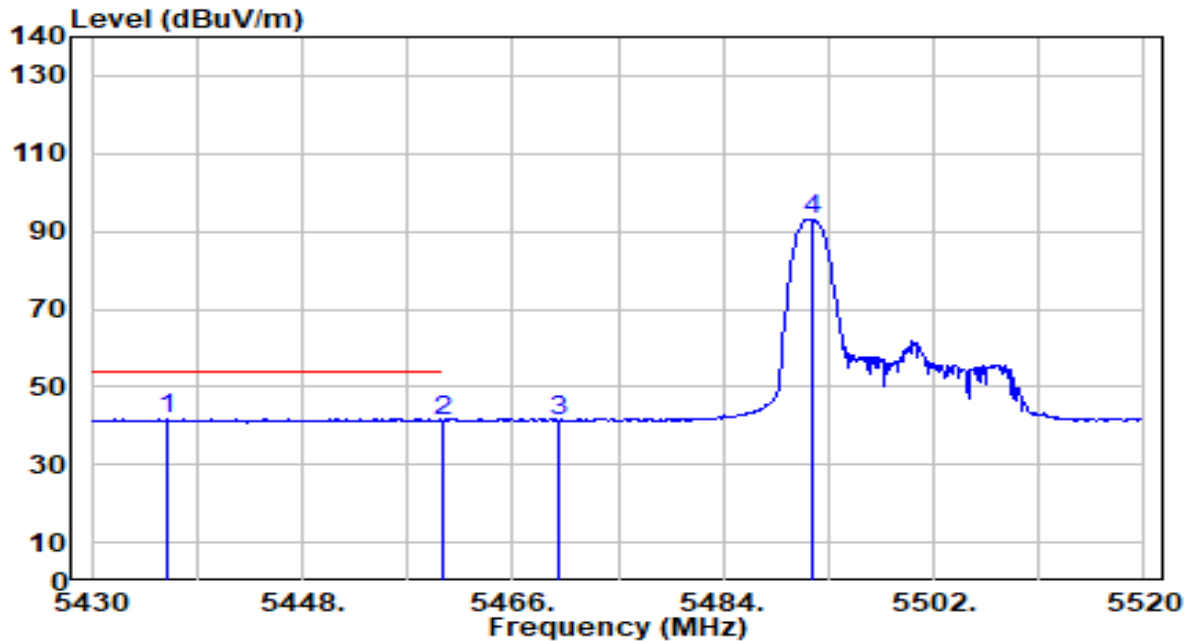


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5436.390	39.68	2.00	41.68	-12.32	54.00	293	36	Average
2		5460.000	39.36	2.07	41.43	-12.57	54.00	293	36	Average
3		5470.000	39.31	2.11	41.41	N/A	N/A	293	36	Average
4		5491.560	90.86	2.17	93.04	N/A	N/A	293	36	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band3_26Tone_RU8_CH 140_ANT 6+7	Test Voltage	By Notebook PC

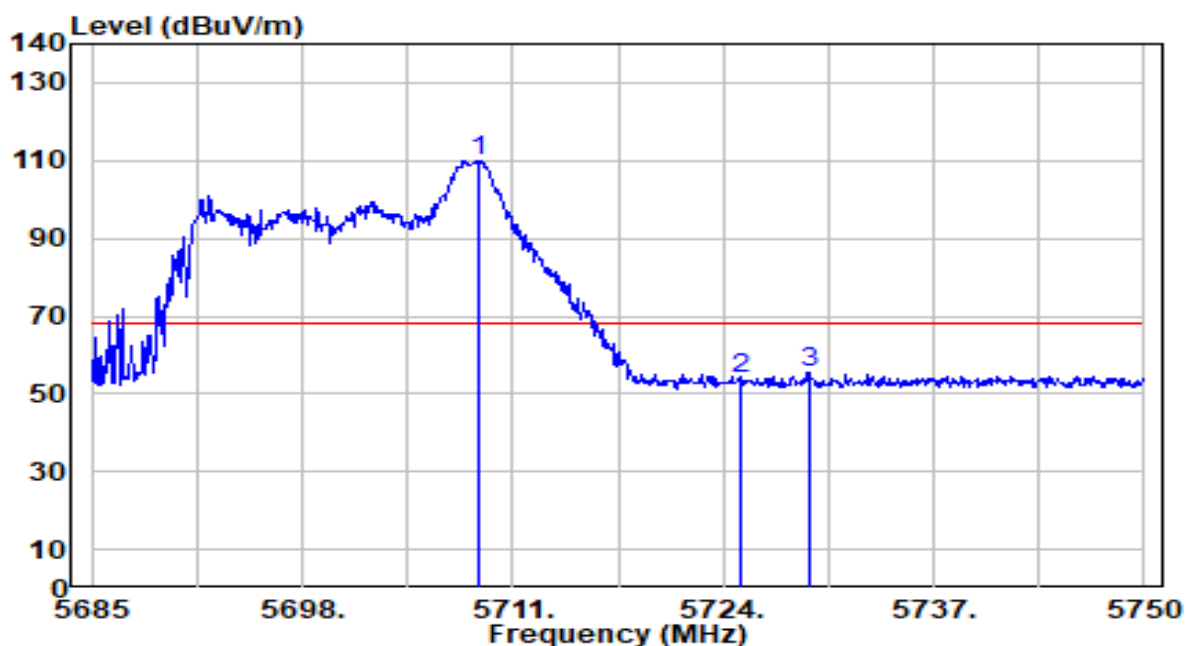


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5708.985	106.90	3.17	110.06	N/A	N/A	100	0	Peak
2	5725.000	50.53	3.25	53.79	-14.41	68.20	100	0	Peak
3	* 5729.265	52.23	3.28	55.50	-12.70	68.20	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band3_26Tone_RU8_CH 140_ANT 6+7	Test Voltage	By Notebook PC

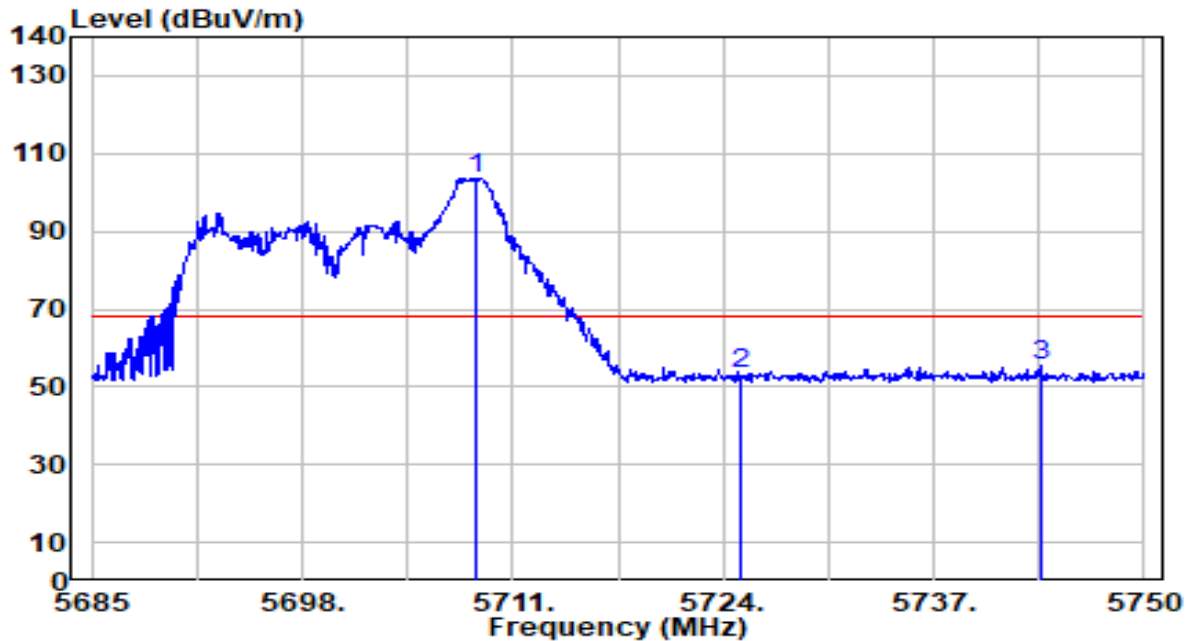


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5708.725	100.60	3.17	103.76	N/A	N/A	302	333	Peak
2	5725.000	50.14	3.25	53.39	-14.81	68.20	302	333	Peak
3	* 5743.565	51.92	3.35	55.27	-12.93	68.20	302	333	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band3_52Tone_RU74_CH 100_ANT 6+7	Test Voltage	By Notebook PC

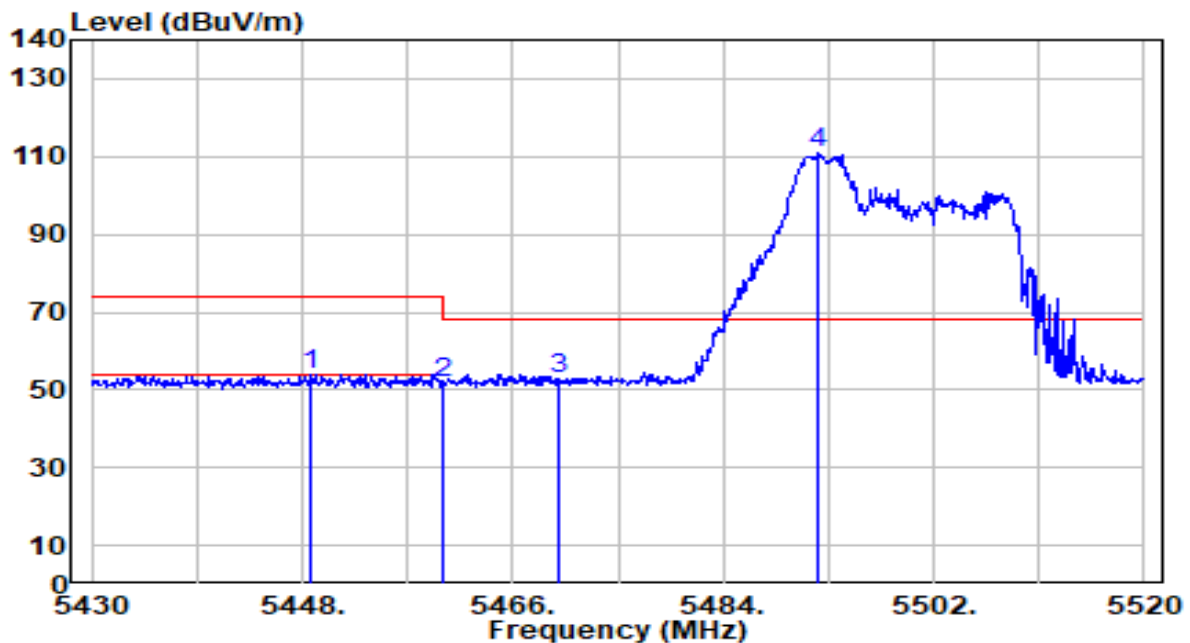


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5448.630	52.05	2.04	54.08	-19.92	74.00	100	360	Peak
2	5460.000	49.91	2.07	51.98	-22.02	74.00	100	360	Peak
3	* 5470.000	50.95	2.11	53.05	-15.15	68.20	100	360	Peak
4	5492.010	108.52	2.17	110.69	N/A	N/A	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band3_52Tone_RU74_CH 100_ANT 6+7	Test Voltage	By Notebook PC

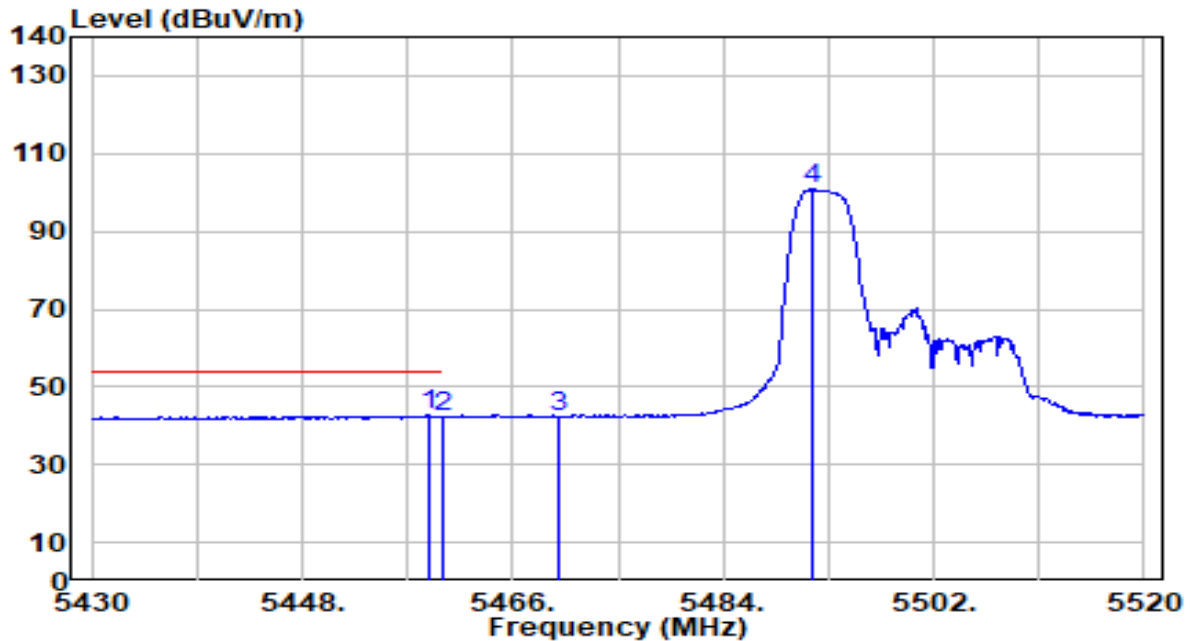


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5458.800	40.50	2.07	42.57	-11.43	54.00	100	360	Average
2		5460.000	40.12	2.07	42.19	-11.81	54.00	100	360	Average
3		5470.000	40.27	2.11	42.37	N/A	N/A	100	360	Average
4		5491.650	98.74	2.17	100.91	N/A	N/A	100	360	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band3_52Tone_RU74_CH 100_ANT 6+7	Test Voltage	By Notebook PC

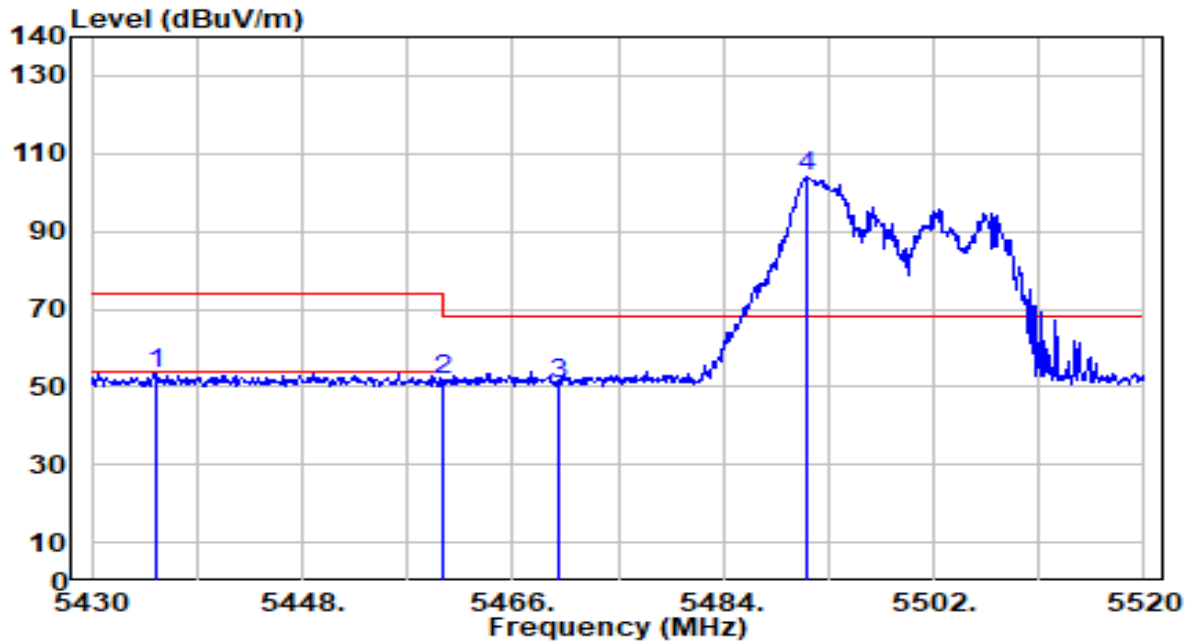


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5435.580	51.45	2.00	53.45	-20.55	74.00	324	97	Peak
2	5460.000	49.55	2.07	51.62	-22.38	74.00	324	97	Peak
3	* 5470.000	48.65	2.11	50.75	-17.45	68.20	324	97	Peak
4	5491.110	102.01	2.17	104.18	N/A	N/A	324	97	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band3_52Tone_RU74_CH 100_ANT 6+7	Test Voltage	By Notebook PC

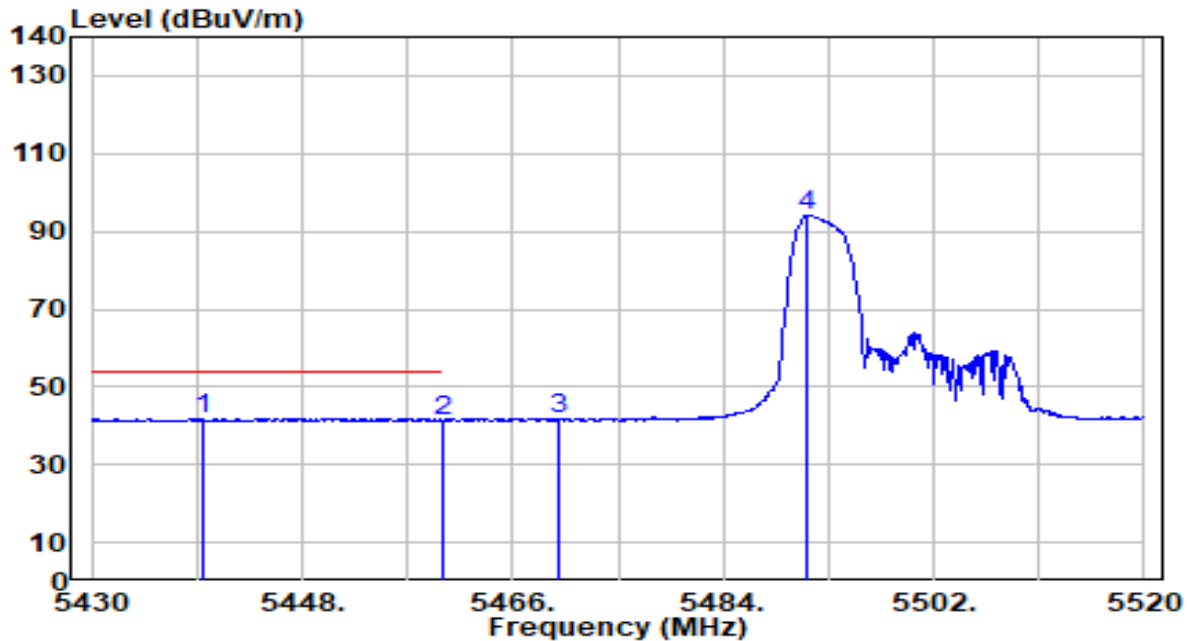


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5439.540	39.92	2.01	41.93	-12.07	54.00	324	97	Average
2		5460.000	39.26	2.07	41.33	-12.67	54.00	324	97	Average
3		5470.000	39.38	2.11	41.48	N/A	N/A	324	97	Average
4		5491.200	91.90	2.17	94.08	N/A	N/A	324	97	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band3_52Tone_RU77_CH 140_ANT 6+7	Test Voltage	By Notebook PC

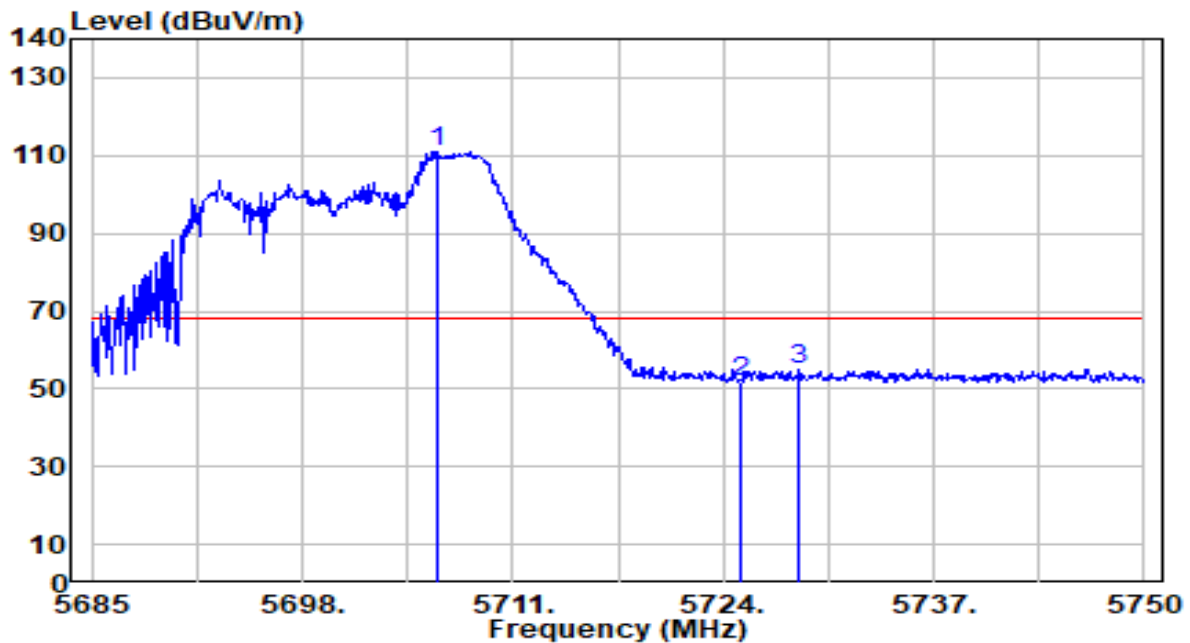


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5706.320	107.89	3.15	111.04	N/A	N/A	108	360	Peak
2	5725.000	48.65	3.25	51.90	-16.30	68.20	108	360	Peak
3	* 5728.680	51.76	3.27	55.03	-13.17	68.20	108	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band3_52Tone_RU77_CH 140_ANT 6+7	Test Voltage	By Notebook PC

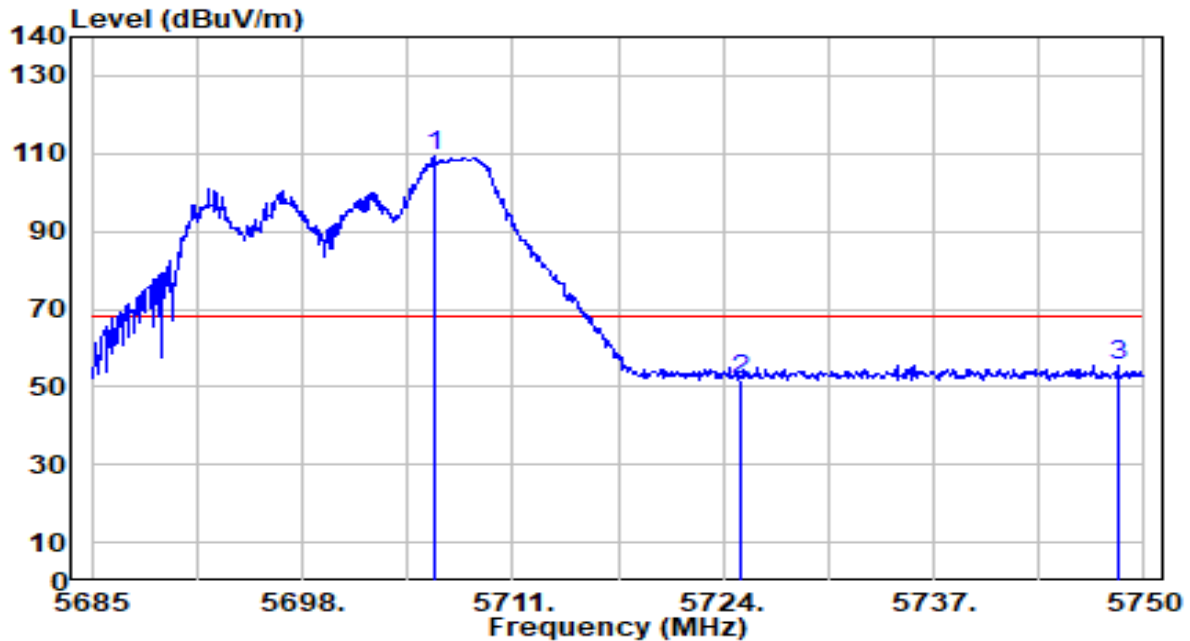


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5706.255	106.43	3.15	109.58	N/A	N/A	348	91	Peak
2	5725.000	48.68	3.25	51.93	-16.27	68.20	348	91	Peak
3	* 5748.375	52.11	3.38	55.49	-12.71	68.20	348	91	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band3_106Tone_RU106_CH 100_ANT 6+7	Test Voltage	By Notebook PC

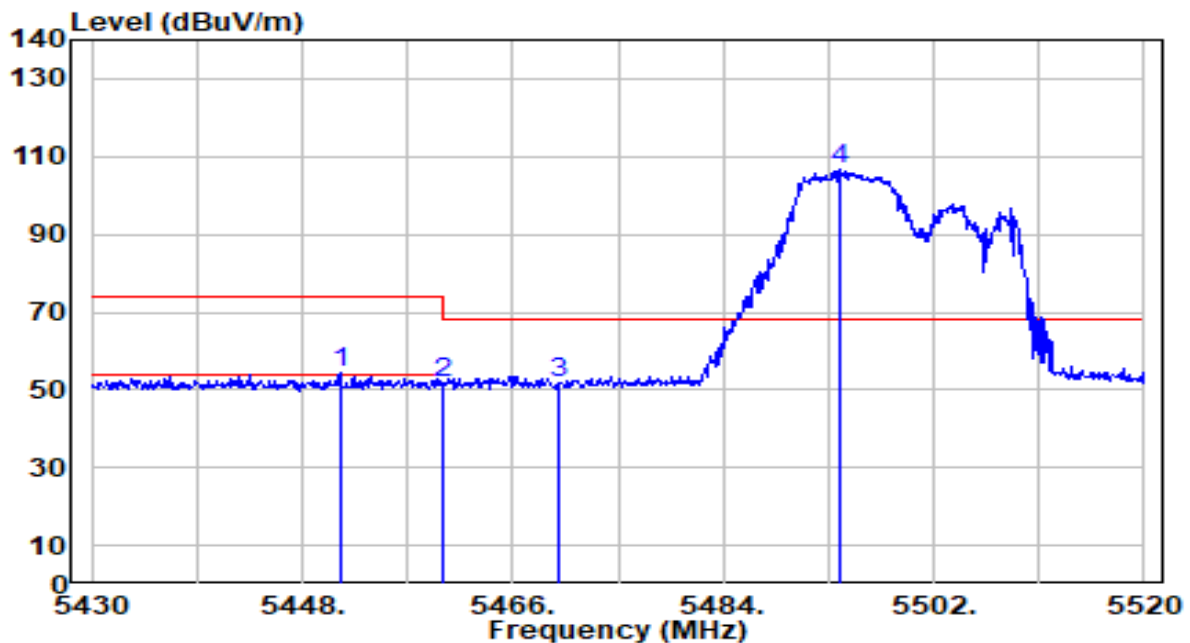


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5451.330	52.30	2.05	54.35	-19.65	74.00	100	127	Peak
2	5460.000	49.68	2.07	51.75	-22.25	74.00	100	127	Peak
3	* 5470.000	49.80	2.11	51.91	-16.29	68.20	100	127	Peak
4	5493.990	104.51	2.18	106.69	N/A	N/A	100	127	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band3_106Tone_RU106_CH 100_ANT 6+7	Test Voltage	By Notebook PC

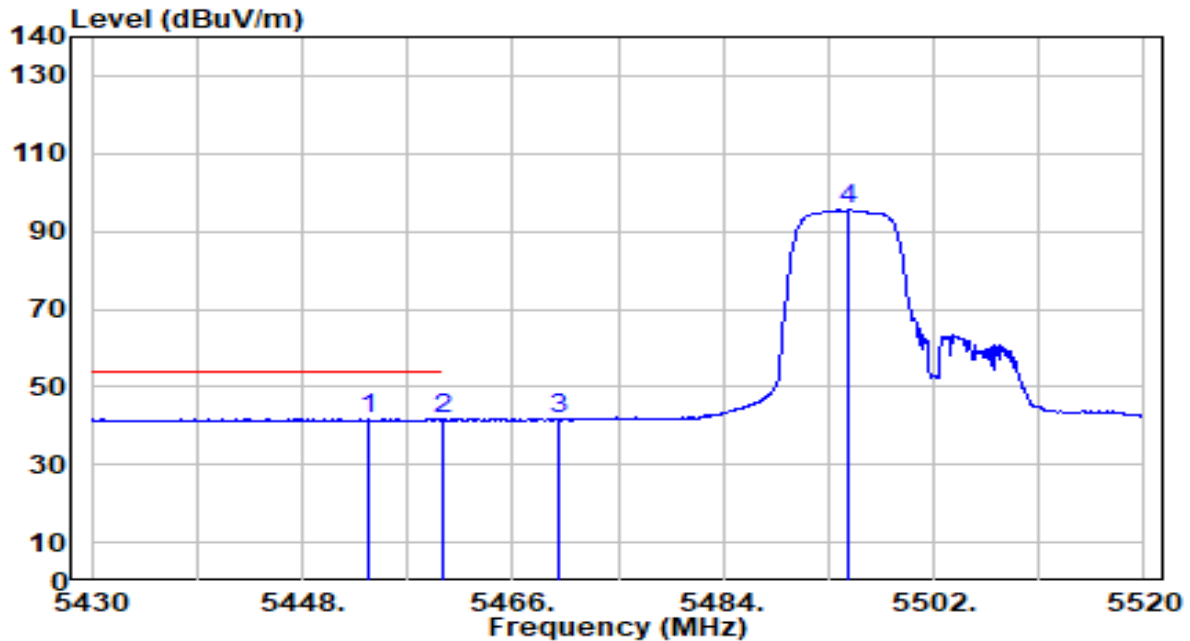


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5453.760	39.73	2.05	41.78	-12.22	54.00	100	127	Average
2		5460.000	39.56	2.07	41.64	-12.36	54.00	100	127	Average
3		5470.000	39.42	2.11	41.53	N/A	N/A	100	127	Average
4		5494.800	93.34	2.18	95.53	N/A	N/A	100	127	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band3_106Tone_RU106_CH 100_ANT 6+7	Test Voltage	By Notebook PC

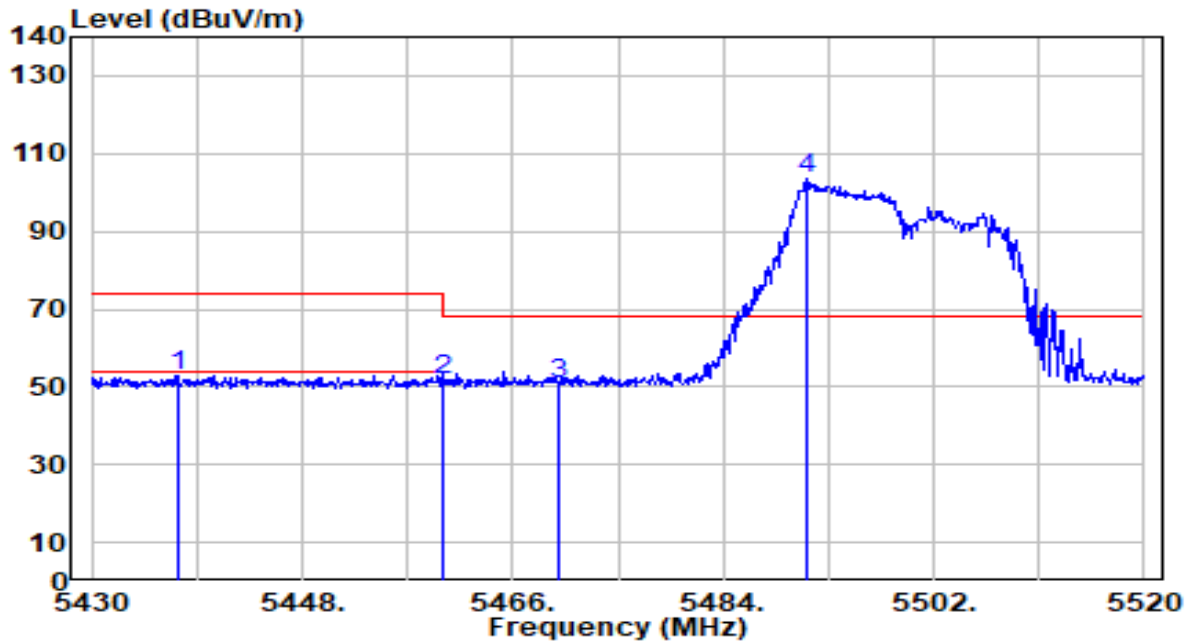


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5437.290	50.94	2.00	52.94	-21.06	74.00	293	36	Peak
2	5460.000	49.49	2.07	51.57	-22.43	74.00	293	36	Peak
3	* 5470.000	48.48	2.11	50.59	-17.61	68.20	293	36	Peak
4	5491.110	101.26	2.17	103.44	N/A	N/A	293	36	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band3_106Tone_RU106_CH 100_ANT 6+7	Test Voltage	By Notebook PC

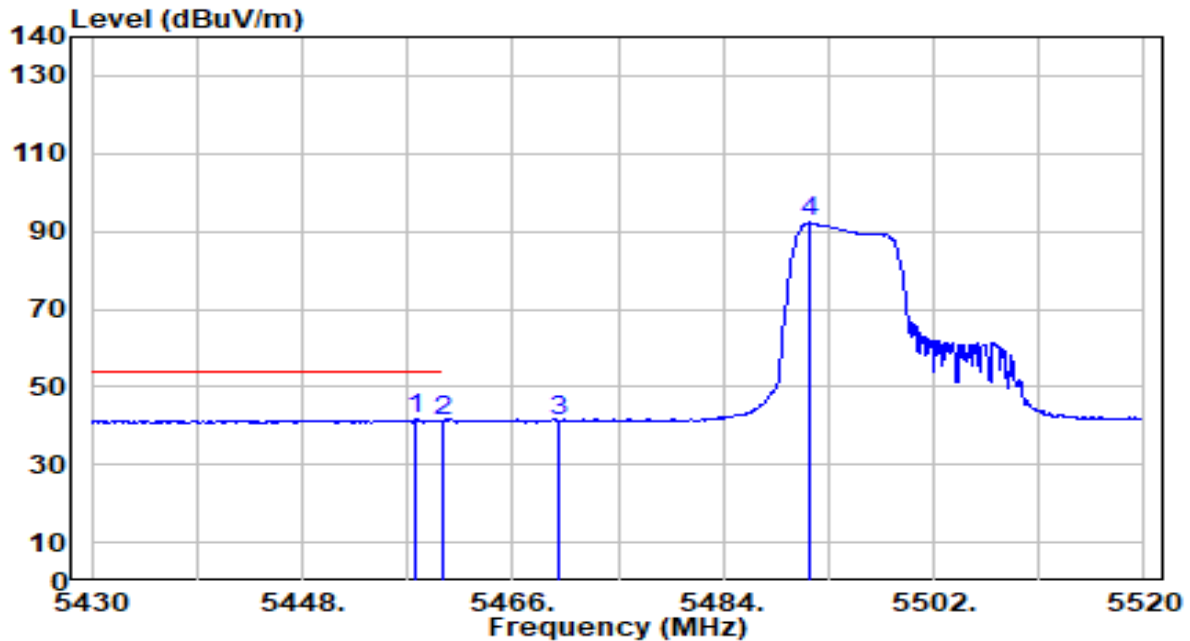


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5457.720	39.44	2.07	41.51	-12.49	54.00	293	36	Average
2		5460.000	39.19	2.07	41.26	-12.74	54.00	293	36	Average
3		5470.000	39.14	2.11	41.24	N/A	N/A	293	36	Average
4		5491.290	90.06	2.17	92.23	N/A	N/A	293	36	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band3_106Tone_RU107_CH 140_ANT 6+7	Test Voltage	By Notebook PC

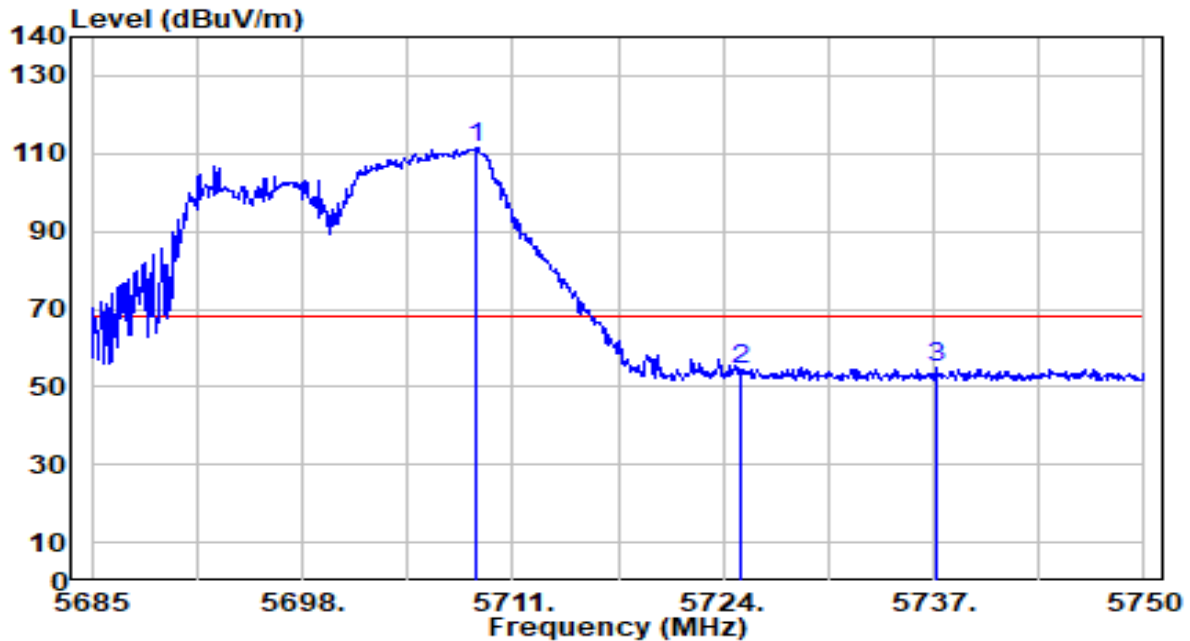


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5708.790	108.15	3.17	111.32	N/A	N/A	100	0	Peak
2	5725.000	50.93	3.25	54.19	-14.01	68.20	100	0	Peak
3	* 5737.130	51.82	3.32	55.14	-13.06	68.20	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band3_106Tone_RU107_CH 140_ANT 6+7	Test Voltage	By Notebook PC

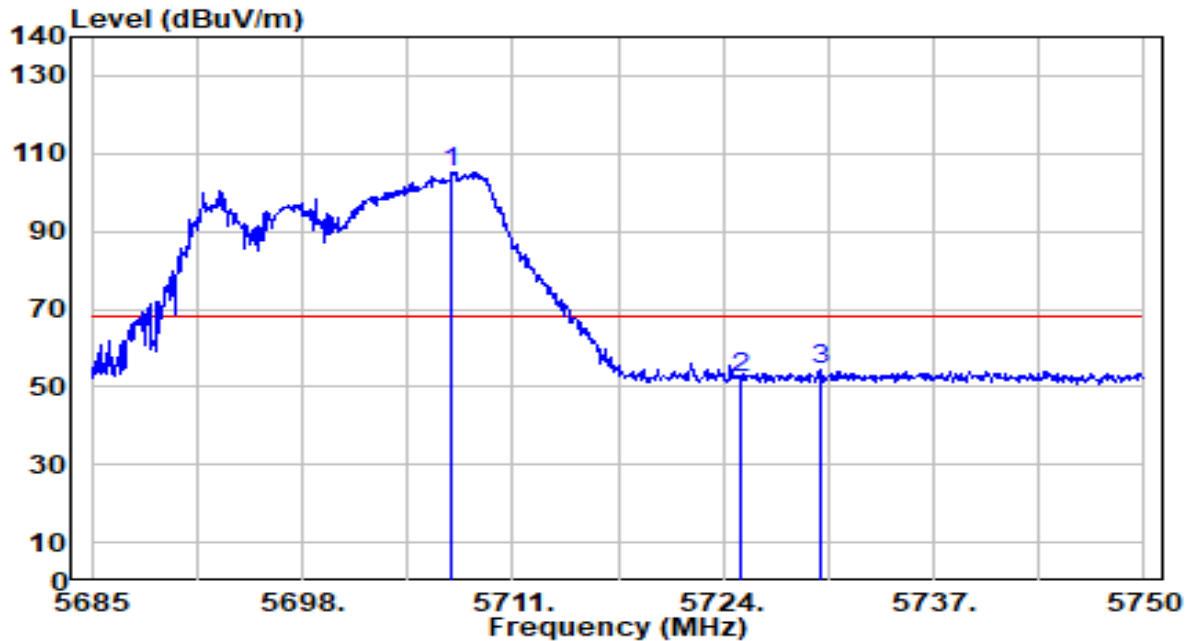


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5707.230	102.23	3.16	105.39	N/A	N/A	302	333	Peak
2	5725.000	49.25	3.25	52.50	-15.70	68.20	302	333	Peak
3	* 5729.980	50.88	3.28	54.16	-14.04	68.20	302	333	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band3_242Tone_RU122_CH 100_ANT 6+7	Test Voltage	By Notebook PC

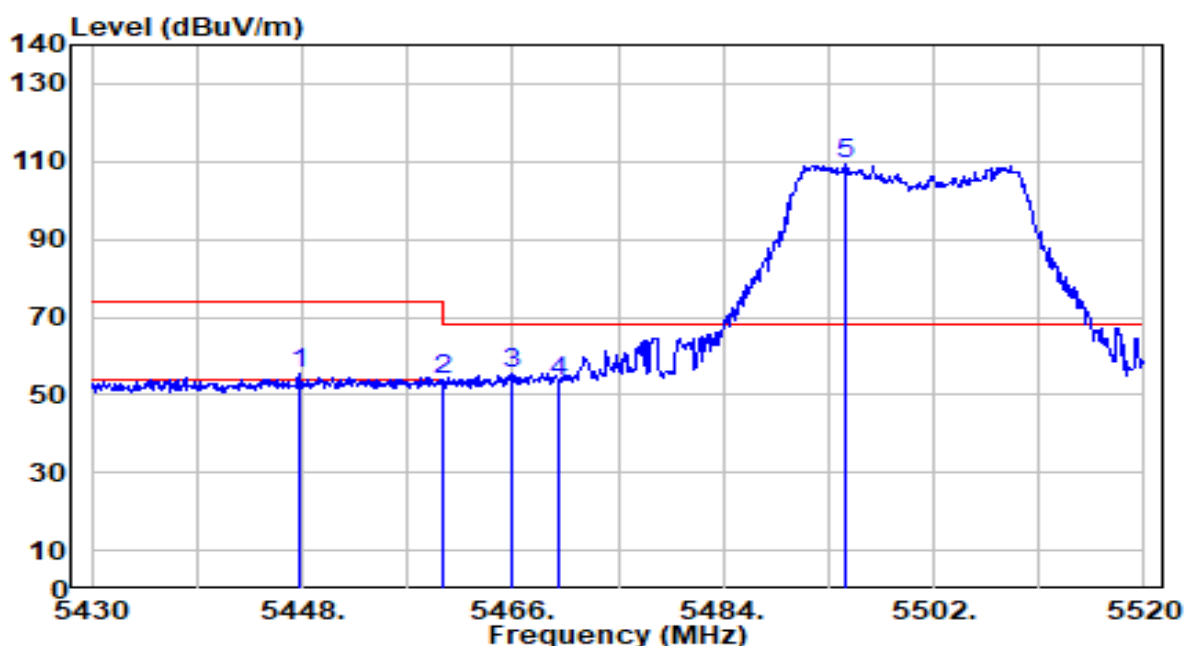


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5447.730	53.61	2.04	55.64	-18.36	74.00	127	360	Peak
2	5460.000	51.56	2.07	53.64	-20.36	74.00	127	360	Peak
3	* 5465.820	53.56	2.09	55.66	-12.54	68.20	127	360	Peak
4	5470.000	51.17	2.11	53.28	-14.92	68.20	127	360	Peak
5	5494.350	107.13	2.18	109.32	N/A	N/A	127	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band3_242Tone_RU122_CH 100_ANT 6+7	Test Voltage	By Notebook PC

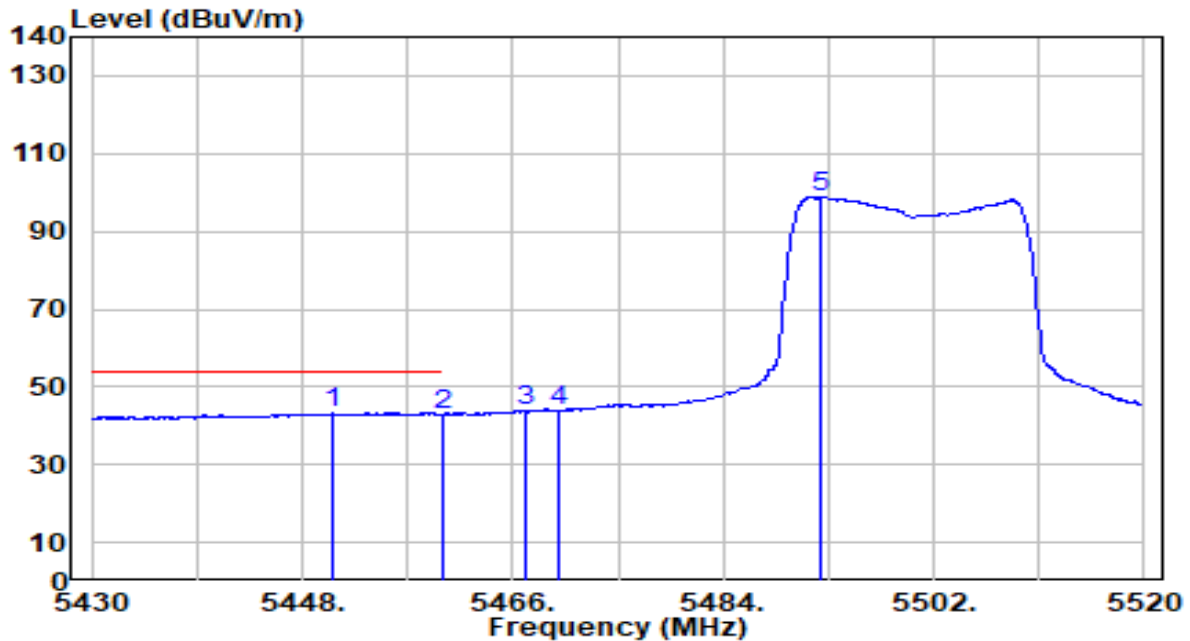


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5450.700	41.30	2.05	43.35	-10.65	54.00	127	360	Average
2		5460.000	40.69	2.07	42.77	-11.23	54.00	127	360	Average
3		5467.080	41.94	2.10	44.04	N/A	N/A	127	360	Average
4		5470.000	41.90	2.11	44.01	N/A	N/A	127	360	Average
5		5492.370	96.59	2.18	98.77	N/A	N/A	127	360	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band3_242Tone_RU122_CH 100_ANT 6+7	Test Voltage	By Notebook PC

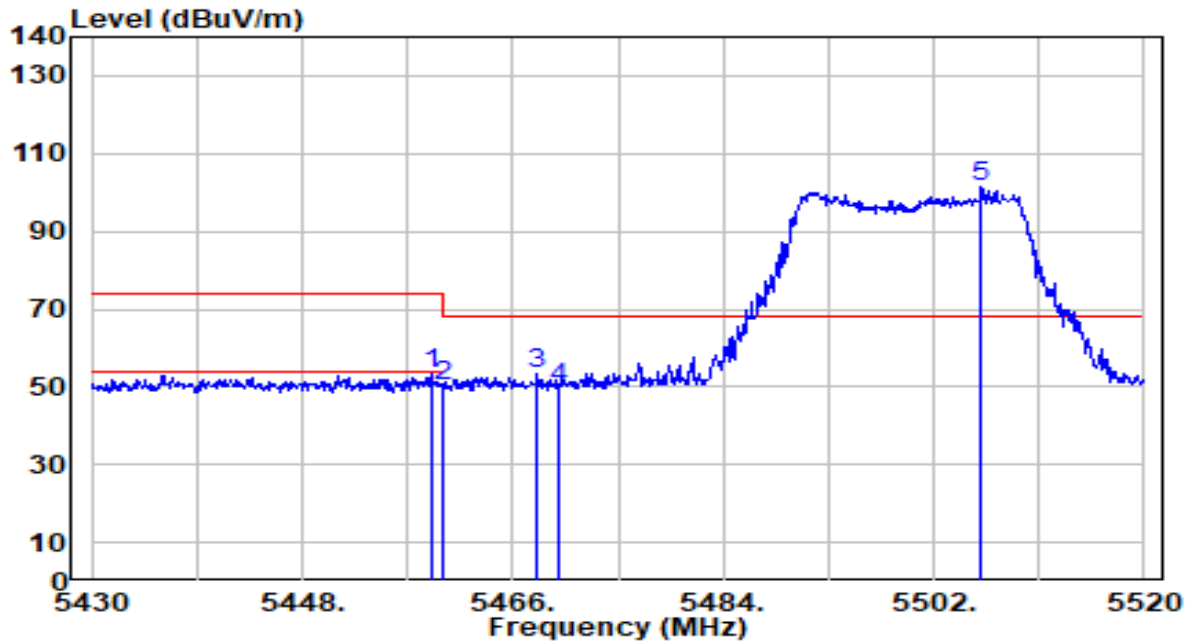


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5458.980	51.07	2.07	53.14	-20.86	74.00	293	36	Peak
2	5460.000	48.10	2.07	50.17	-23.83	74.00	293	36	Peak
3	* 5468.160	51.45	2.10	53.55	-14.65	68.20	293	36	Peak
4	5470.000	47.51	2.11	49.61	-18.59	68.20	293	36	Peak
5	5506.050	99.07	2.22	101.30	N/A	N/A	293	36	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band3_242Tone_RU122_CH 100_ANT 6+7	Test Voltage	By Notebook PC

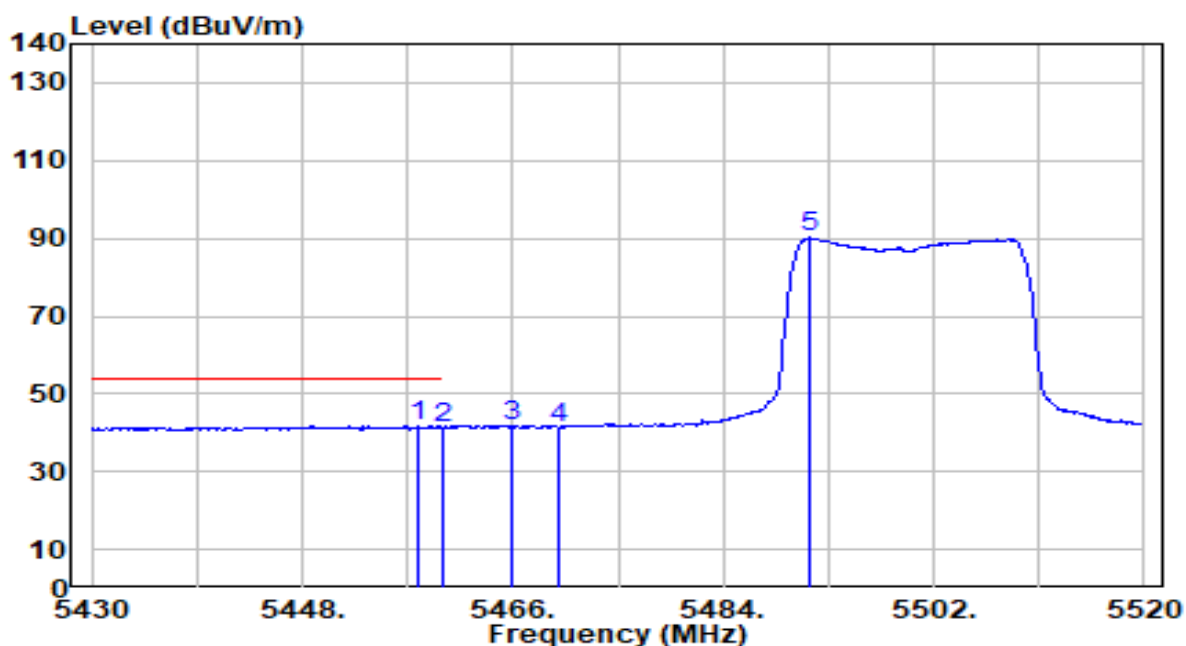


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5457.900	39.89	2.07	41.96	-12.04	54.00	293	36	Average
2		5460.000	39.09	2.07	41.16	-12.84	54.00	293	36	Average
3		5466.000	39.75	2.09	41.84	N/A	N/A	293	36	Average
4		5470.000	39.30	2.11	41.41	N/A	N/A	293	36	Average
5		5491.380	87.98	2.17	90.15	N/A	N/A	293	36	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band3_242Tone_RU122_CH 140_ANT 6+7	Test Voltage	By Notebook PC

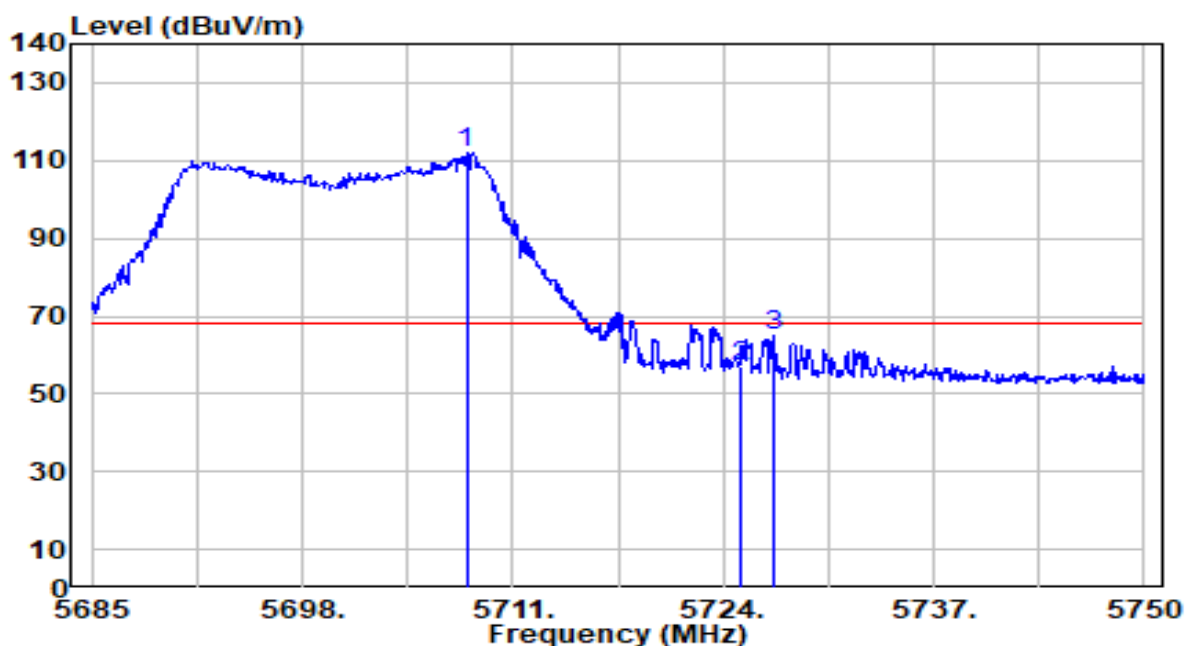


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5708.140	108.81	3.16	111.97	N/A	N/A	100	0	Peak
2	5725.000	53.66	3.25	56.92	-11.28	68.20	100	0	Peak
3	* 5727.185	61.68	3.27	64.94	-3.26	68.20	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band3_242Tone_RU122_CH 140_ANT 6+7	Test Voltage	By Notebook PC

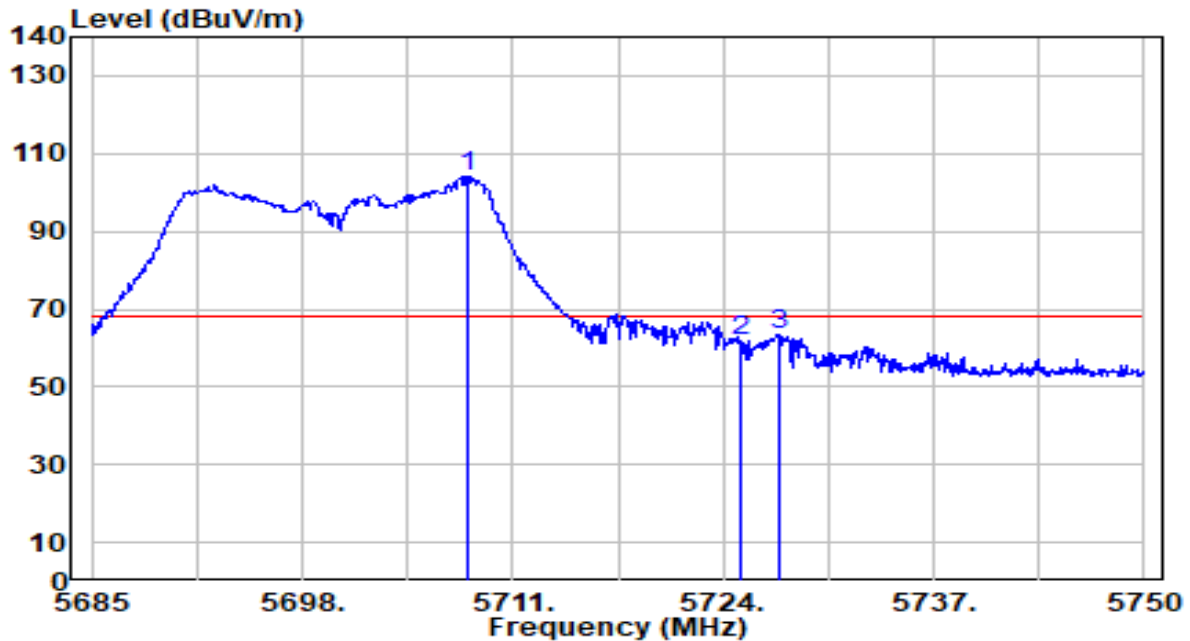


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5708.270	101.13	3.16	104.29	N/A	N/A	309	333	Peak
2	5725.000	58.34	3.25	61.60	-6.60	68.20	309	333	Peak
3	* 5727.445	60.20	3.27	63.47	-4.73	68.20	309	333	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band4_26Tone_RU0_CH 149_ANT 6+7	Test Voltage	By Notebook PC

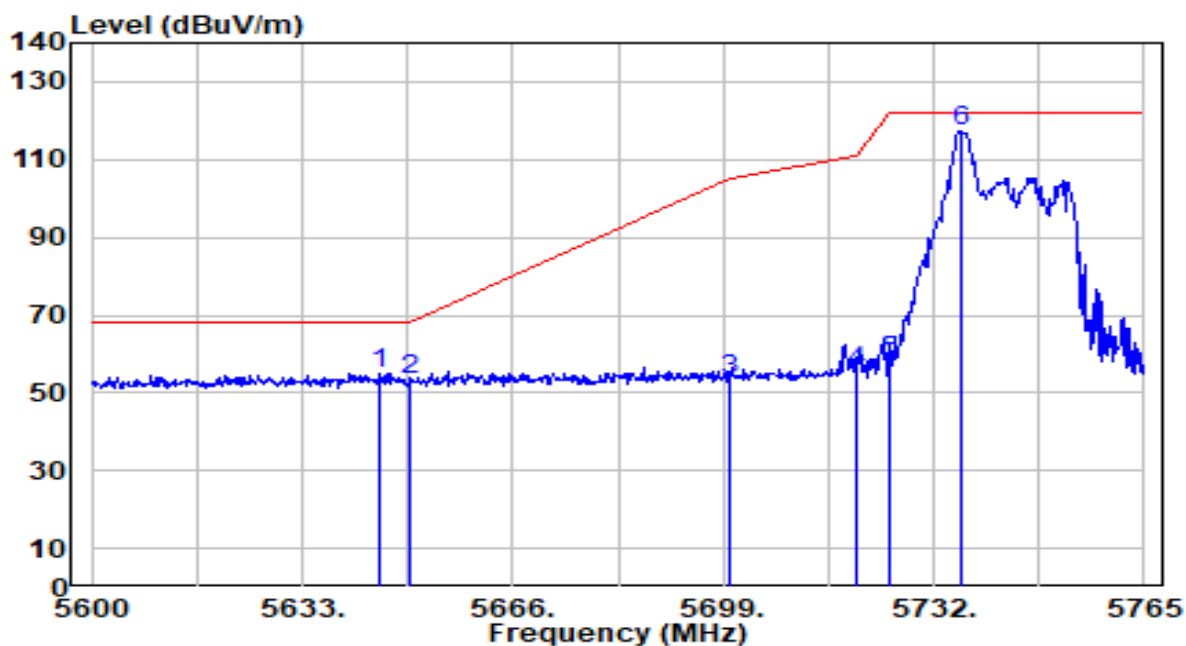


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5645.210	52.29	2.83	55.12	-13.08	68.20	100	6	Peak
2		5650.000	50.28	2.86	53.13	-15.07	68.20	100	6	Peak
3		5700.000	50.41	3.12	53.53	-51.67	105.20	100	6	Peak
4		5720.000	52.35	3.23	55.58	-55.22	110.80	100	6	Peak
5		5725.000	54.92	3.25	58.17	-64.03	122.20	100	6	Peak
6		5736.455	113.99	3.32	117.31	N/A	N/A	100	6	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band4_26Tone_RU0_CH 149_ANT 6+7	Test Voltage	By Notebook PC

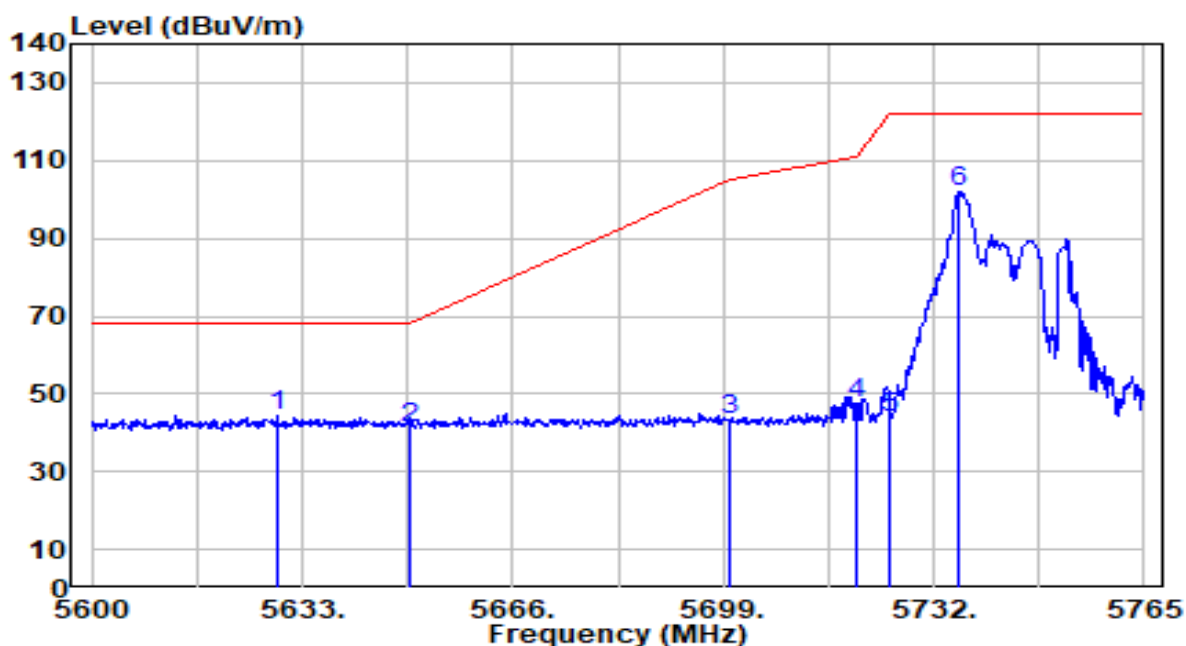


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5629.040	41.64	2.75	44.39	-23.81	68.20	308	288	Peak
2		5650.000	38.45	2.86	41.30	-26.90	68.20	308	288	Peak
3		5700.000	40.16	3.12	43.28	-61.92	105.20	308	288	Peak
4		5720.000	44.23	3.23	47.45	-63.35	110.80	308	288	Peak
5		5725.000	40.71	3.25	43.97	-78.23	122.20	308	288	Peak
6		5735.795	98.42	3.31	101.73	N/A	N/A	308	288	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band4_26Tone_RU8_CH 165_ANT 6+7	Test Voltage	By Notebook PC

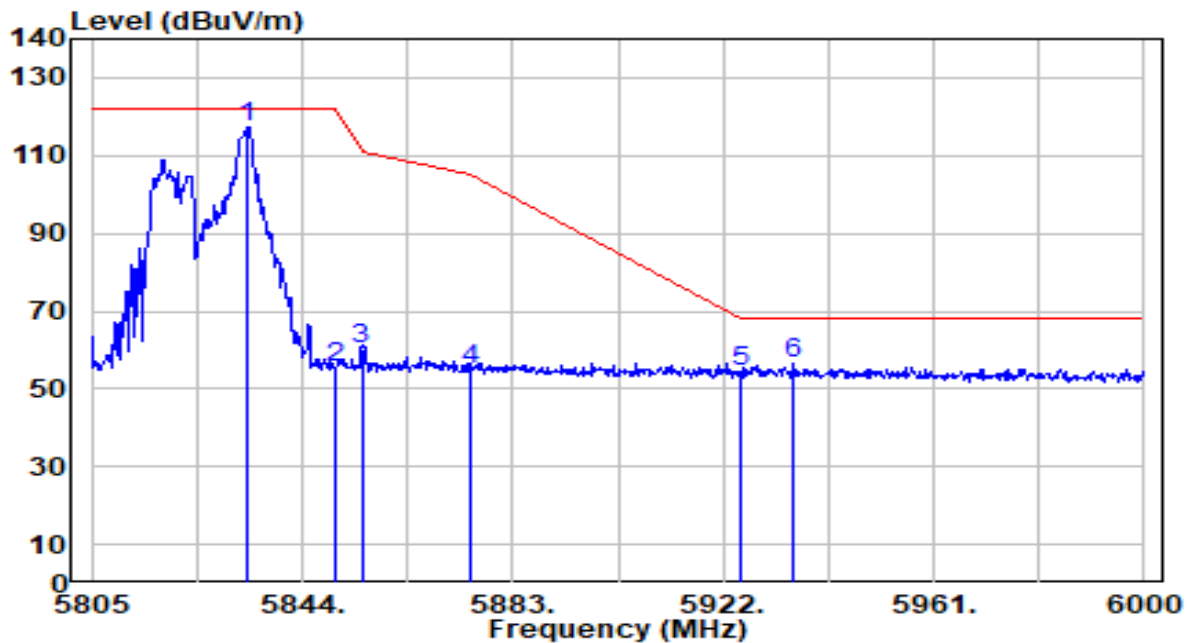


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5833.860	113.62	3.64	117.26	N/A	N/A	202	0	Peak
2	5850.000	51.81	3.63	55.44	-66.76	122.20	202	0	Peak
3	5855.000	56.80	3.63	60.43	-50.37	110.80	202	0	Peak
4	5875.000	51.24	3.61	54.85	-50.35	105.20	202	0	Peak
5	5925.000	50.69	3.59	54.28	-13.92	68.20	202	0	Peak
6	* 5934.870	53.19	3.59	56.78	-11.42	68.20	202	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band4_26Tone_RU8_CH 165_ANT 6+7	Test Voltage	By Notebook PC

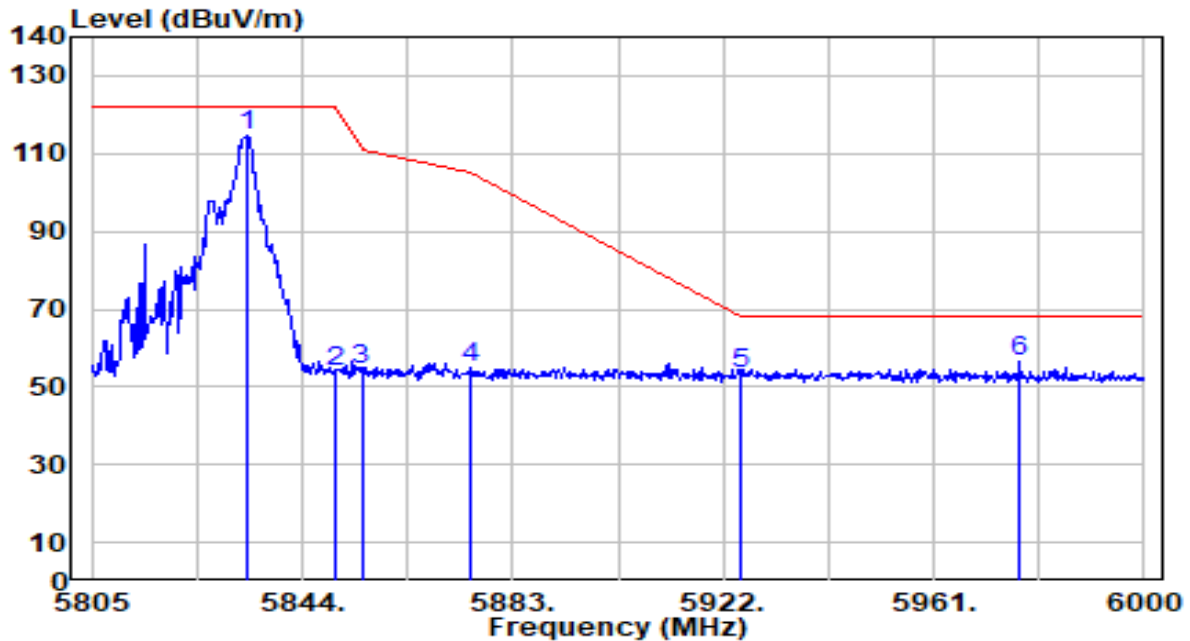


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5833.665	110.94	3.64	114.58	N/A	N/A	309	104	Peak
2	5850.000	50.44	3.63	54.07	-68.13	122.20	309	104	Peak
3	5855.000	50.66	3.63	54.29	-56.51	110.80	309	104	Peak
4	5875.000	51.46	3.61	55.08	-50.12	105.20	309	104	Peak
5	5925.000	49.91	3.59	53.51	-14.69	68.20	309	104	Peak
6	* 5976.990	52.70	3.58	56.28	-11.92	68.20	309	104	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band4_52Tone_RU74_CH 149_ANT 6+7	Test Voltage	By Notebook PC

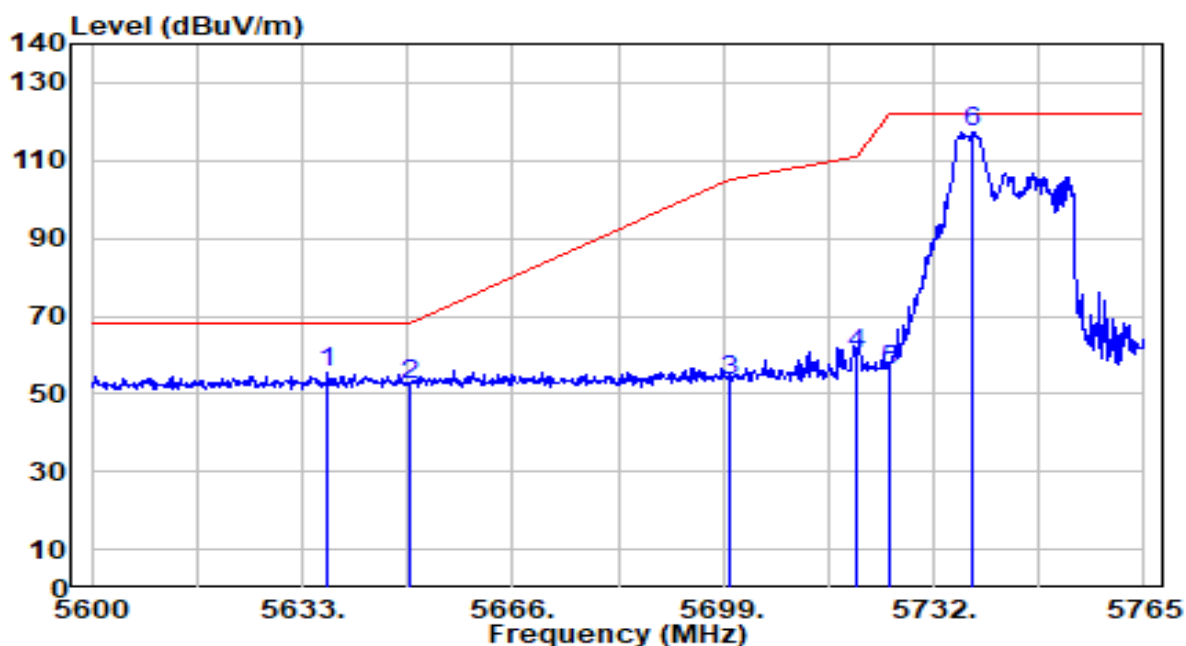


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5636.960	52.64	2.79	55.43	-12.77	68.20	179	2	Peak
2		5650.000	49.67	2.86	52.53	-15.67	68.20	179	2	Peak
3		5700.000	50.29	3.12	53.41	-51.79	105.20	179	2	Peak
4		5720.000	57.01	3.23	60.24	-50.56	110.80	179	2	Peak
5		5725.000	52.73	3.25	55.99	-66.21	122.20	179	2	Peak
6		5738.105	113.88	3.33	117.20	N/A	N/A	179	2	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band4_52Tone_RU74_CH 149_ANT 6+7	Test Voltage	By Notebook PC

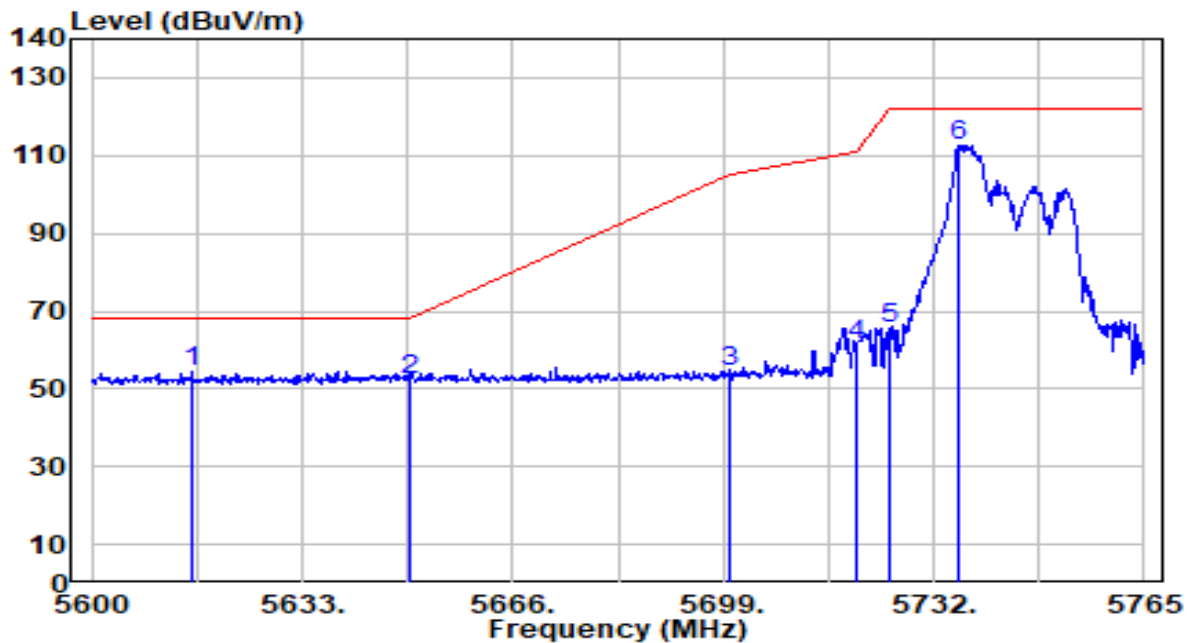


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5615.675	51.84	2.68	54.52	-13.68	68.20	328	296	Peak
2		5650.000	49.40	2.86	52.25	-15.95	68.20	328	296	Peak
3		5700.000	51.18	3.12	54.30	-50.90	105.20	328	296	Peak
4		5720.000	58.15	3.23	61.37	-49.43	110.80	328	296	Peak
5		5725.000	62.36	3.25	65.61	-56.59	122.20	328	296	Peak
6		5735.795	109.42	3.31	112.74	N/A	N/A	328	296	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band4_52Tone_RU77_CH 165_ANT 6+7	Test Voltage	By Notebook PC

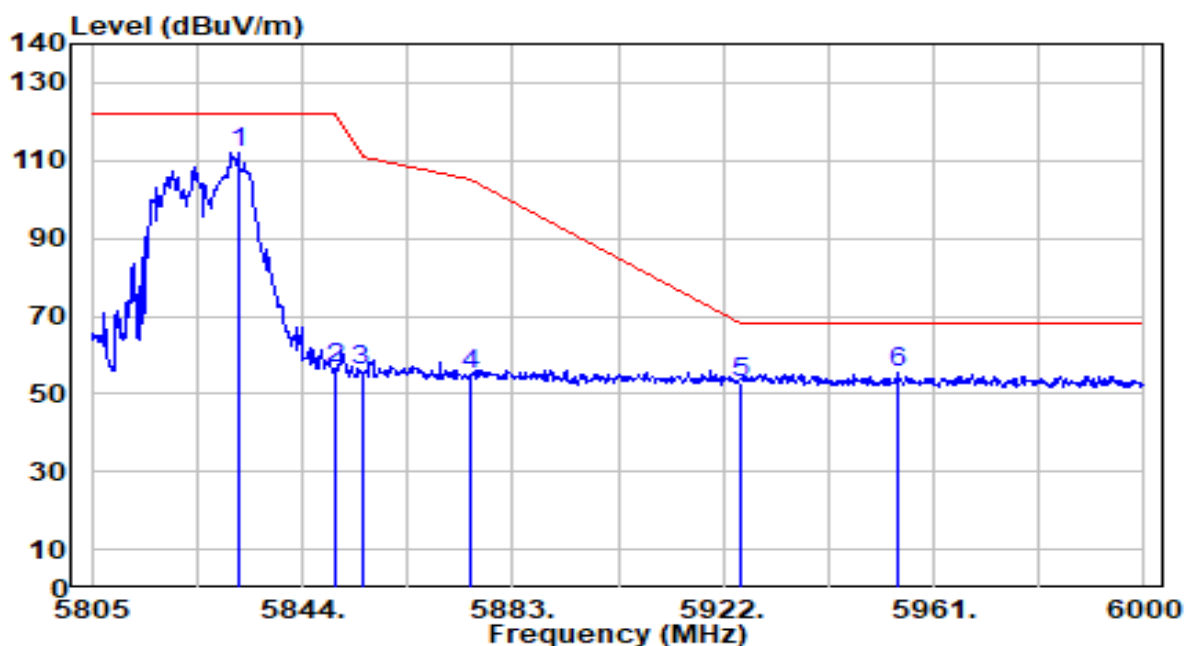


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5832.105	108.50	3.64	112.14	N/A	N/A	184	48	Peak
2	5850.000	52.77	3.63	56.40	-65.80	122.20	184	48	Peak
3	5855.000	52.20	3.63	55.82	-54.98	110.80	184	48	Peak
4	5875.000	51.41	3.61	55.02	-50.18	105.20	184	48	Peak
5	5925.000	49.26	3.59	52.85	-15.35	68.20	184	48	Peak
6	* 5954.175	52.03	3.59	55.61	-12.59	68.20	184	48	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band4_52Tone_RU77_CH 165_ANT 6+7	Test Voltage	By Notebook PC

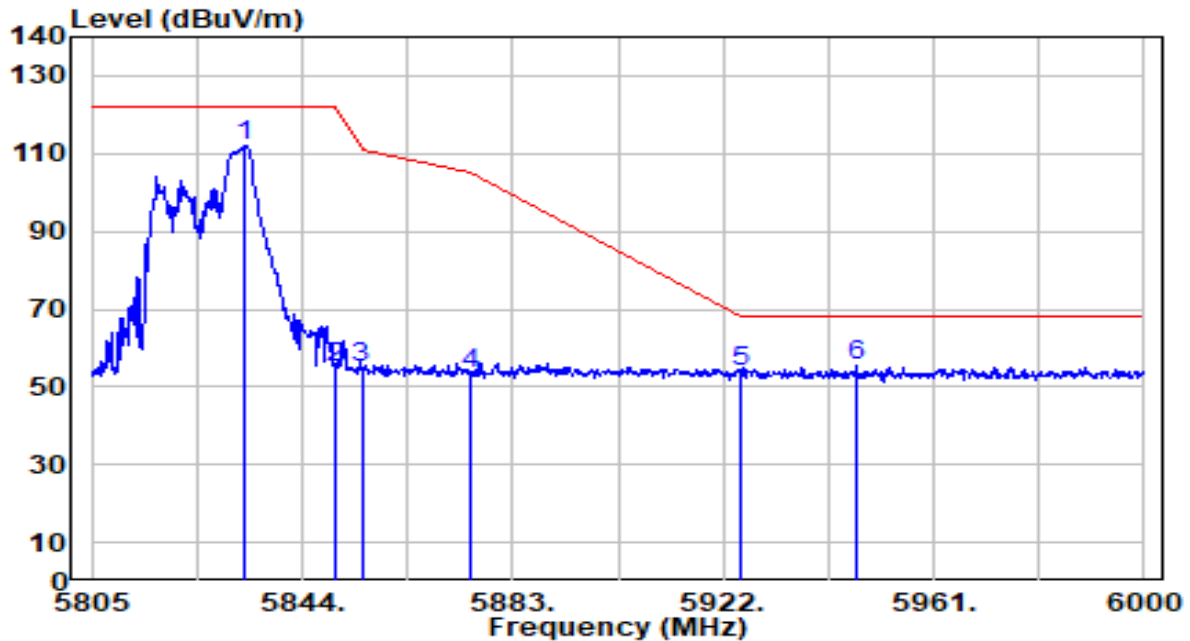


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5833.080	108.45	3.64	112.09	N/A	N/A	308	320	Peak
2	5850.000	51.26	3.63	54.89	-67.31	122.20	308	320	Peak
3	5855.000	51.24	3.63	54.86	-55.94	110.80	308	320	Peak
4	5875.000	49.73	3.61	53.35	-51.85	105.20	308	320	Peak
5	5925.000	50.08	3.59	53.67	-14.53	68.20	308	320	Peak
6	* 5946.570	52.12	3.59	55.71	-12.49	68.20	308	320	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band4_106Tone_RU106_CH 149_ANT 6+7	Test Voltage	By Notebook PC

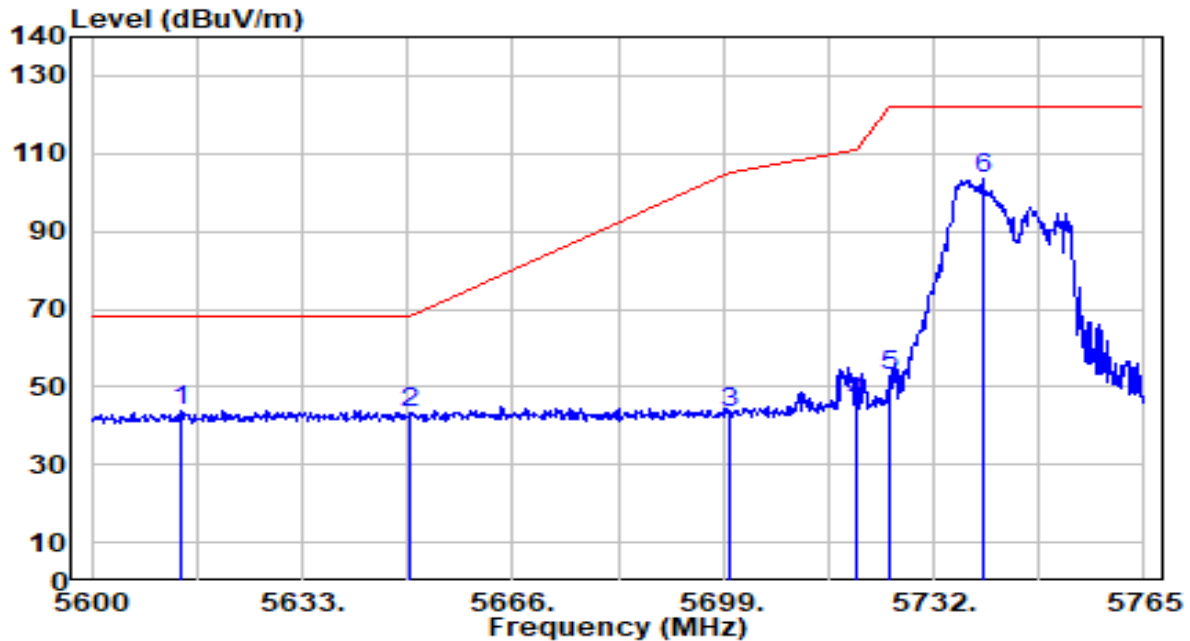


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5614.025	41.26	2.67	43.92	-24.28	68.20	100	6	Peak
2		5650.000	40.43	2.86	43.29	-24.91	68.20	100	6	Peak
3		5700.000	40.01	3.12	43.13	-62.07	105.20	100	6	Peak
4		5720.000	42.64	3.23	45.87	-64.93	110.80	100	6	Peak
5		5725.000	49.56	3.25	52.81	-69.39	122.20	100	6	Peak
6		5739.590	99.97	3.33	103.30	N/A	N/A	100	6	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band4_106Tone_RU106_CH 149_ANT 6+7	Test Voltage	By Notebook PC

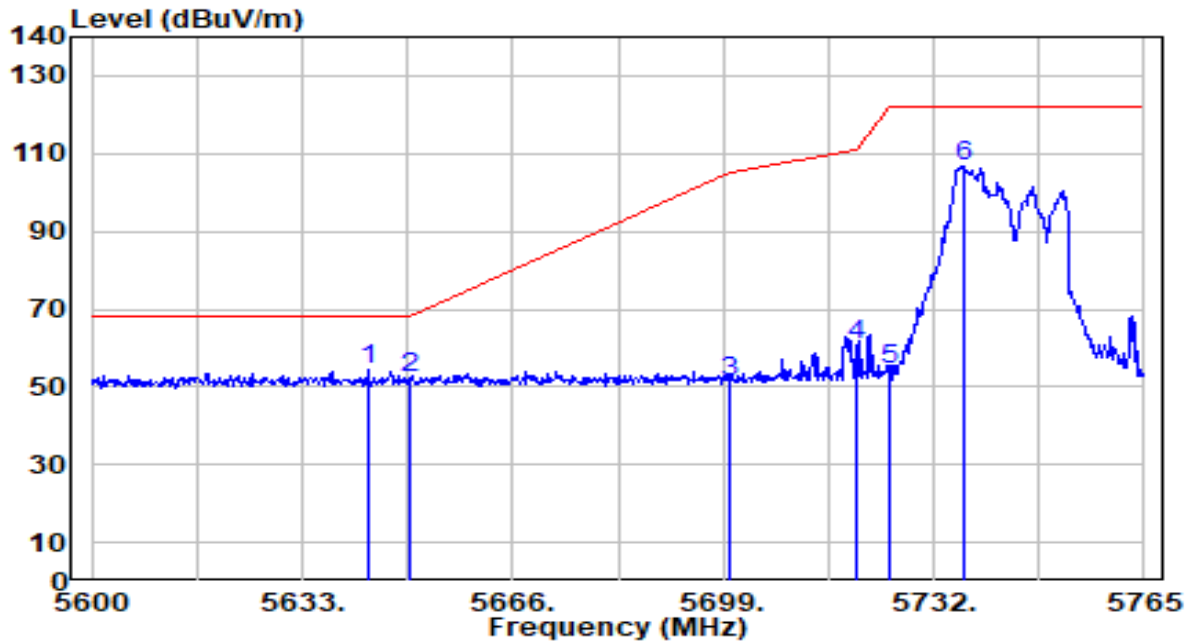


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5643.230	51.53	2.82	54.35	-13.85	68.20	308	288	Peak
2		5650.000	49.32	2.86	52.18	-16.02	68.20	308	288	Peak
3		5700.000	48.03	3.12	51.15	-54.05	105.20	308	288	Peak
4		5720.000	57.40	3.23	60.63	-50.17	110.80	308	288	Peak
5		5725.000	51.07	3.25	54.32	-67.88	122.20	308	288	Peak
6		5736.950	103.61	3.32	106.93	N/A	N/A	308	288	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band4_106Tone_RU107_CH 165_ANT 6+7	Test Voltage	By Notebook PC

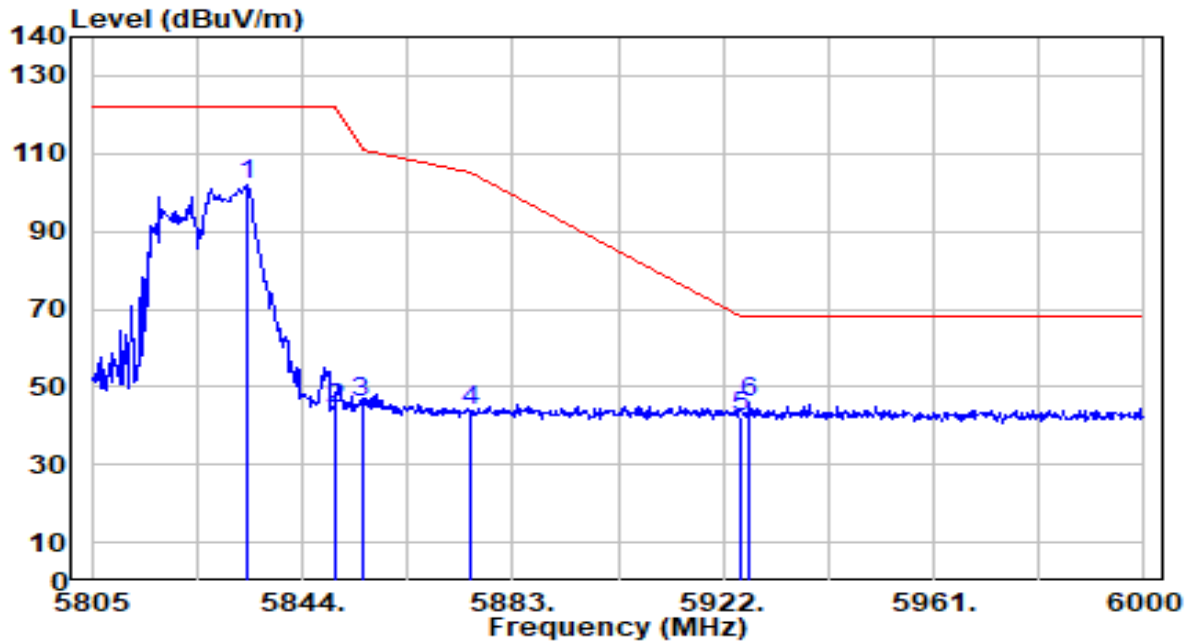


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5833.665	98.49	3.64	102.13	N/A	N/A	202	0	Peak
2	5850.000	40.77	3.63	44.40	-77.80	122.20	202	0	Peak
3	5855.000	42.26	3.63	45.89	-64.91	110.80	202	0	Peak
4	5875.000	40.20	3.61	43.81	-61.39	105.20	202	0	Peak
5	5925.000	38.59	3.59	42.18	-26.02	68.20	202	0	Peak
6	* 5926.875	42.42	3.59	46.01	-22.19	68.20	202	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band4_106Tone_RU107_CH 165_ANT 6+7	Test Voltage	By Notebook PC

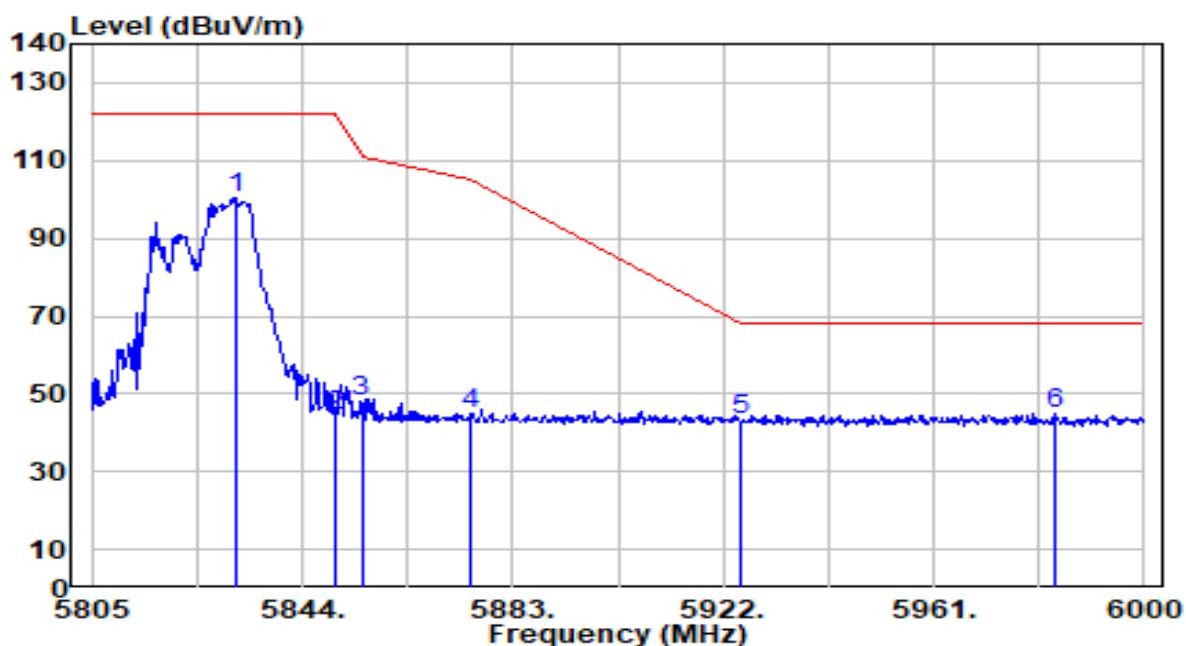


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5831.715	96.76	3.64	100.40	N/A	N/A	309	104	Peak
2	5850.000	40.99	3.63	44.62	-77.58	122.20	309	104	Peak
3	5855.000	44.66	3.63	48.29	-62.51	110.80	309	104	Peak
4	5875.000	41.11	3.61	44.72	-60.48	105.20	309	104	Peak
5	5925.000	39.67	3.59	43.26	-24.94	68.20	309	104	Peak
6	* 5983.620	41.58	3.58	45.16	-23.04	68.20	309	104	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band4_242Tone_RU122_CH 149_ANT 6+7	Test Voltage	By Notebook PC

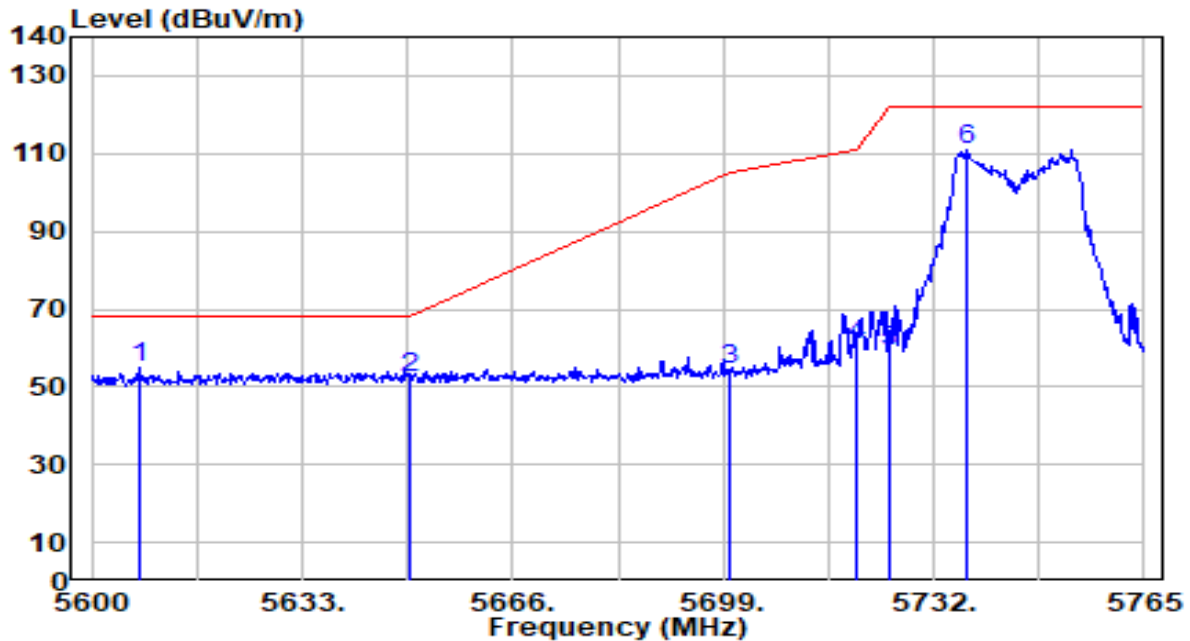


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5607.425	52.22	2.63	54.86	-13.34	68.20	100	6	Peak
2		5650.000	49.28	2.86	52.14	-16.06	68.20	100	6	Peak
3		5700.000	51.13	3.12	54.24	-50.96	105.20	100	6	Peak
4		5720.000	57.66	3.23	60.89	-49.91	110.80	100	6	Peak
5		5725.000	55.96	3.25	59.21	-62.99	122.20	100	6	Peak
6		5737.280	107.87	3.32	111.19	N/A	N/A	100	6	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band4_242Tone_RU122_CH 149_ANT 6+7	Test Voltage	By Notebook PC

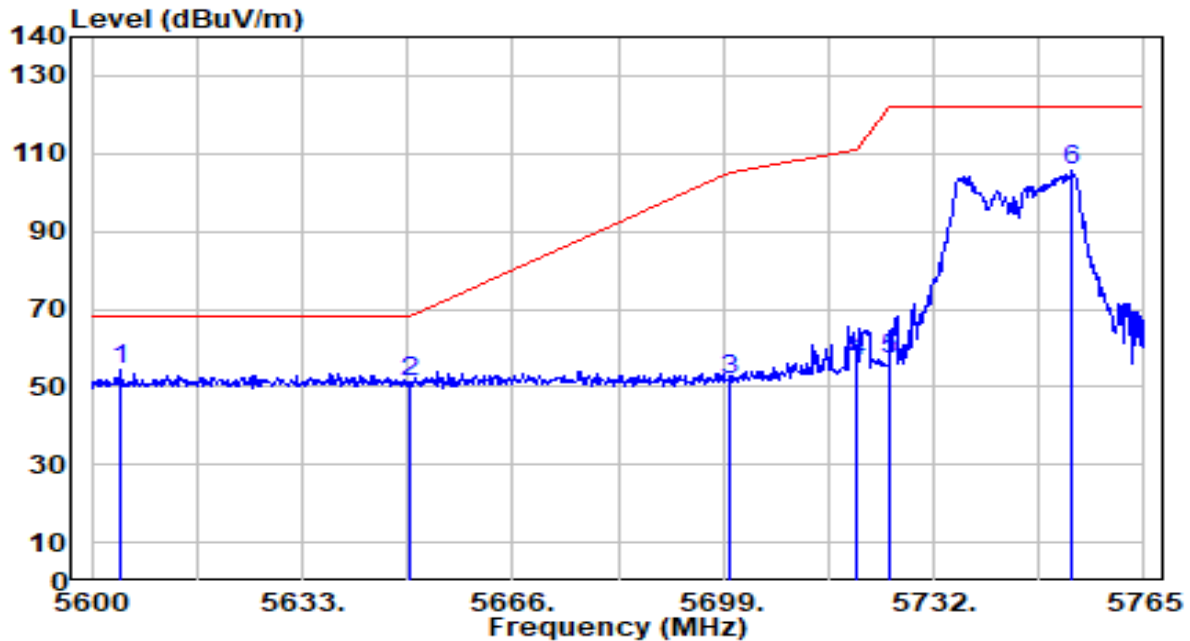


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5604.290	51.70	2.62	54.32	-13.88	68.20	308	288	Peak
2		5650.000	48.49	2.86	51.34	-16.86	68.20	308	288	Peak
3		5700.000	48.49	3.12	51.61	-53.59	105.20	308	288	Peak
4		5720.000	53.45	3.23	56.68	-54.12	110.80	308	288	Peak
5		5725.000	53.86	3.25	57.12	-65.08	122.20	308	288	Peak
6		5753.615	102.13	3.41	105.54	N/A	N/A	308	288	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band4_242Tone_RU122_CH 165_ANT 6+7	Test Voltage	By Notebook PC

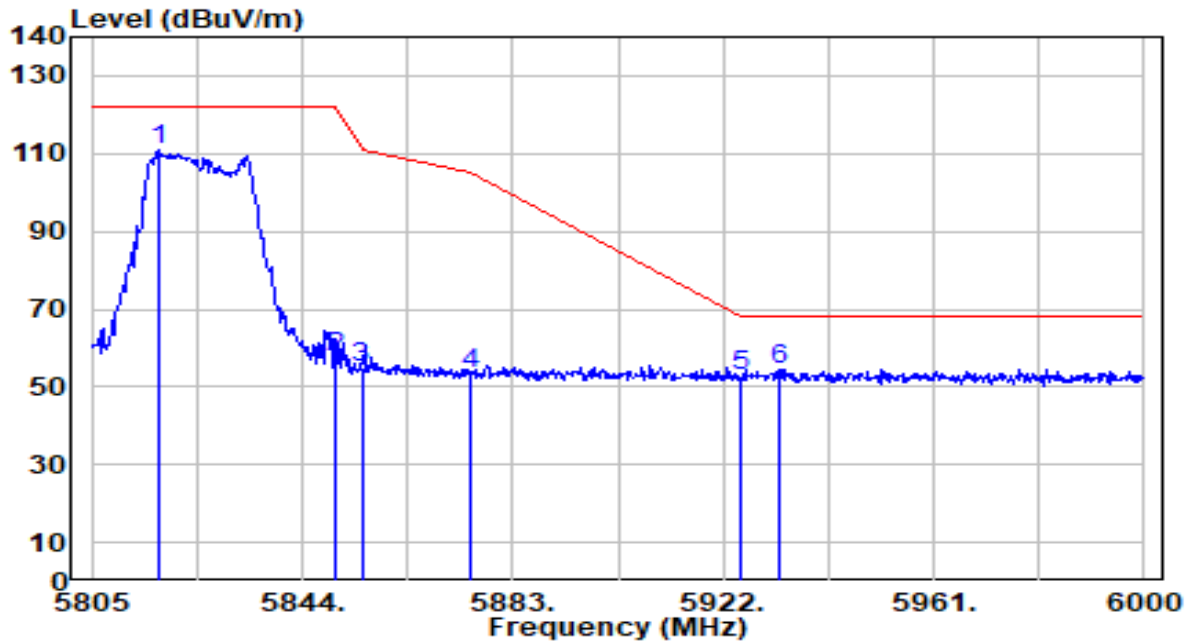


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5817.285	107.34	3.65	110.99	N/A	N/A	202	0	Peak
2	5850.000	54.05	3.63	57.68	-64.52	122.20	202	0	Peak
3	5855.000	51.29	3.63	54.92	-55.88	110.80	202	0	Peak
4	5875.000	49.52	3.61	53.14	-52.06	105.20	202	0	Peak
5	5925.000	49.37	3.59	52.97	-15.23	68.20	202	0	Peak
6	* 5932.530	51.07	3.59	54.66	-13.54	68.20	202	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-16
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band4_242Tone_RU122_CH 165_ANT 6+7	Test Voltage	By Notebook PC

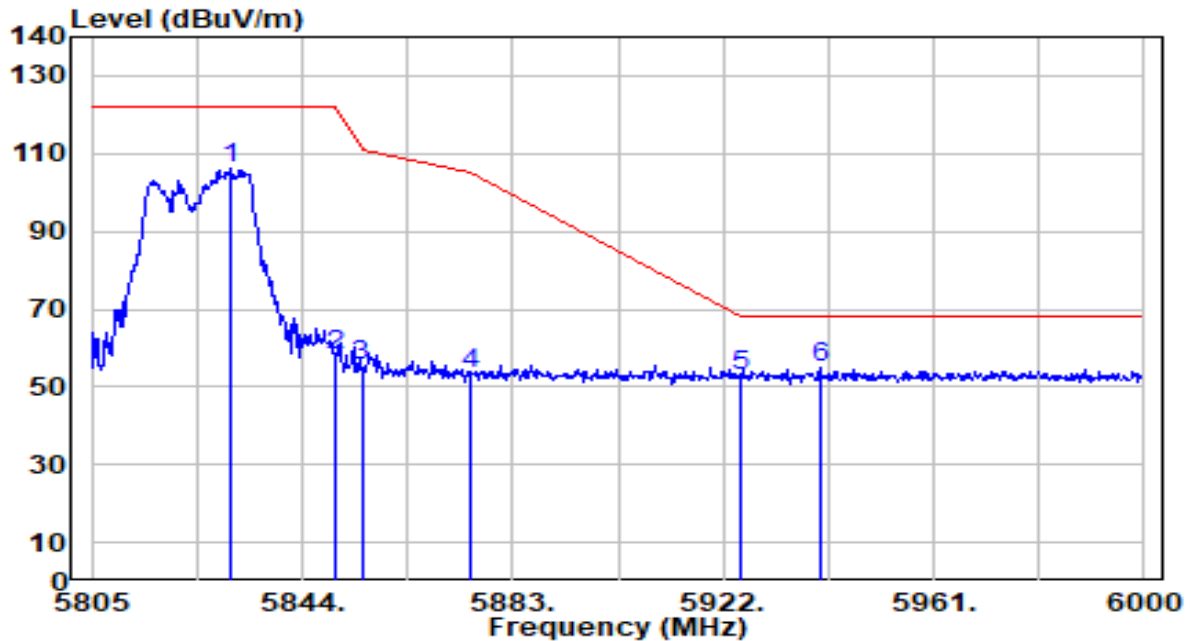


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5830.935	102.47	3.64	106.11	N/A	N/A	309	104	Peak
2	5850.000	54.23	3.63	57.86	-64.34	122.20	309	104	Peak
3	5855.000	51.92	3.63	55.55	-55.25	110.80	309	104	Peak
4	5875.000	49.77	3.61	53.38	-51.82	105.20	309	104	Peak
5	5925.000	49.23	3.59	52.82	-15.38	68.20	309	104	Peak
6	* 5939.940	51.30	3.59	54.89	-13.31	68.20	309	104	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-10
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_52+26Tone_MRU1_TX_Band1_CH 36_ANT 6+7	Test Voltage	By Notebook PC

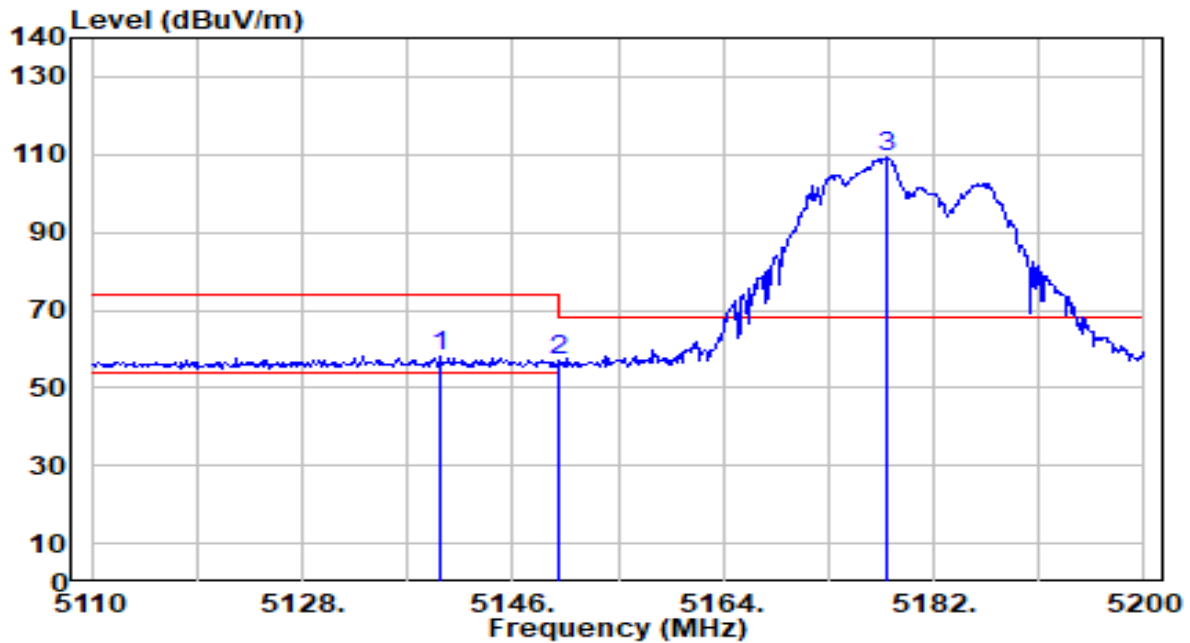


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5139.870	56.13	1.93	58.06	-15.94	74.00	200	129	Peak
2		5150.000	54.86	1.94	56.80	-17.20	74.00	200	129	Peak
3		5178.087	107.44	1.95	109.40	N/A	N/A	200	129	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-10
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_52+26Tone_MRU1_TX_Band1_CH 36_ANT 6+7	Test Voltage	By Notebook PC

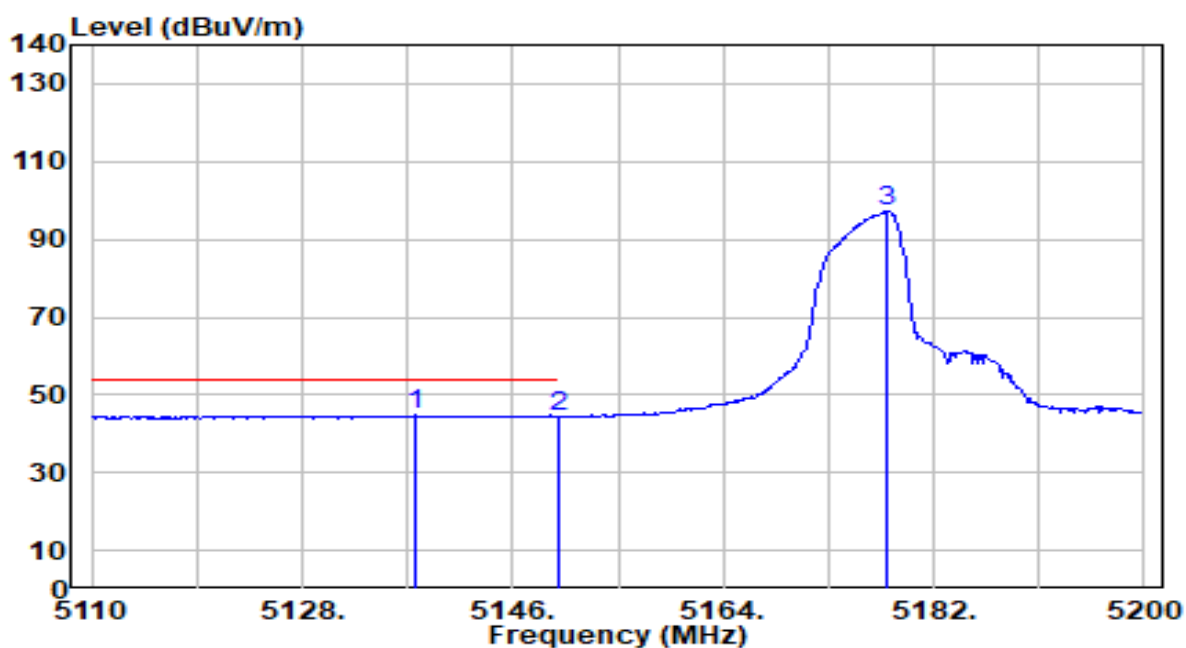


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5137.783	42.79	1.93	44.72	-9.28	54.00	200	129	Average
2		5150.000	42.51	1.94	44.44	-9.56	54.00	200	129	Average
3		5178.087	95.15	1.95	97.11	N/A	N/A	200	129	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-10
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_52+26Tone_MRU1_TX_Band1_CH 36_ANT 6+7	Test Voltage	By Notebook PC

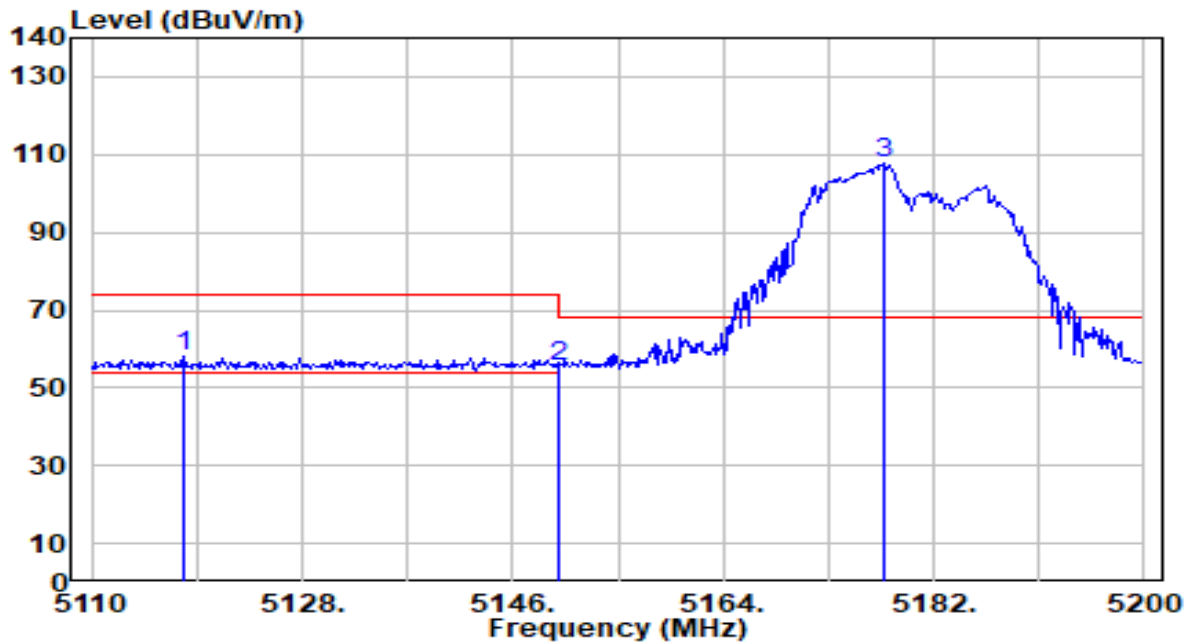


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5117.826	55.98	1.92	57.89	-16.11	74.00	274	66	Peak
2		5150.000	53.71	1.94	55.65	-18.35	74.00	274	66	Peak
3		5177.826	105.76	1.95	107.72	N/A	N/A	274	66	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-10
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_52+26Tone_MRU1_TX_Band1_CH 36_ANT 6+7	Test Voltage	By Notebook PC

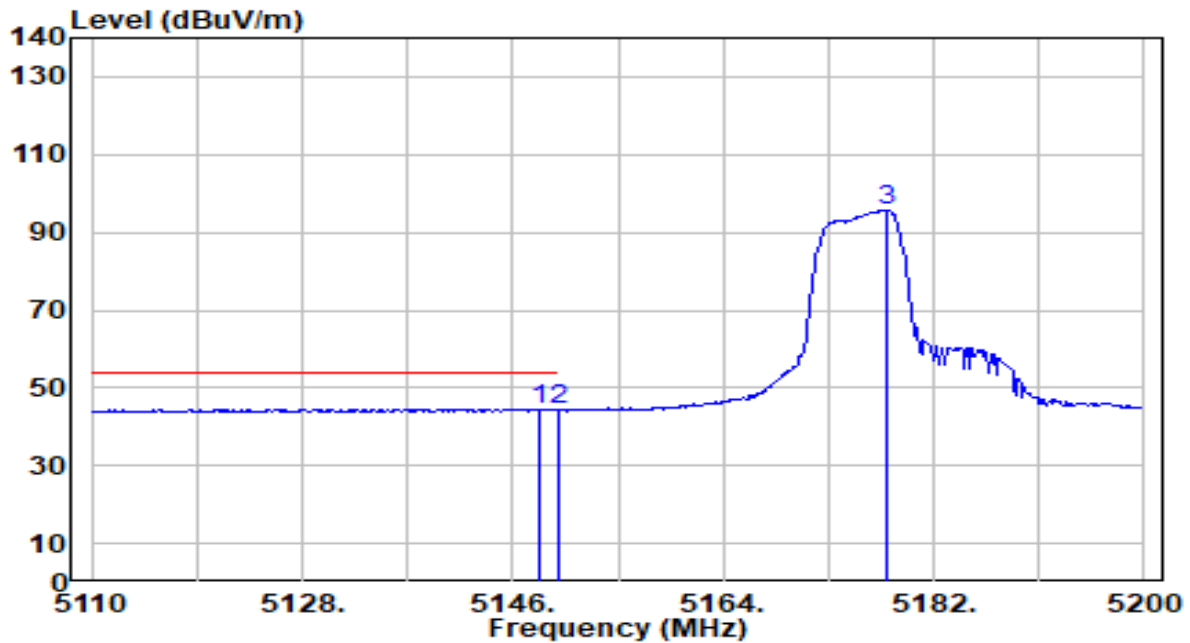


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.217	42.51	1.93	44.45	-9.55	54.00	274	66	Average
2		5150.000	42.25	1.94	44.19	-9.81	54.00	274	66	Average
3		5178.087	93.77	1.95	95.72	N/A	N/A	274	66	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-10
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_106+26Tone_MRU1_TX_Band1_CH 36_ANT 6+7	Test Voltage	By Notebook PC

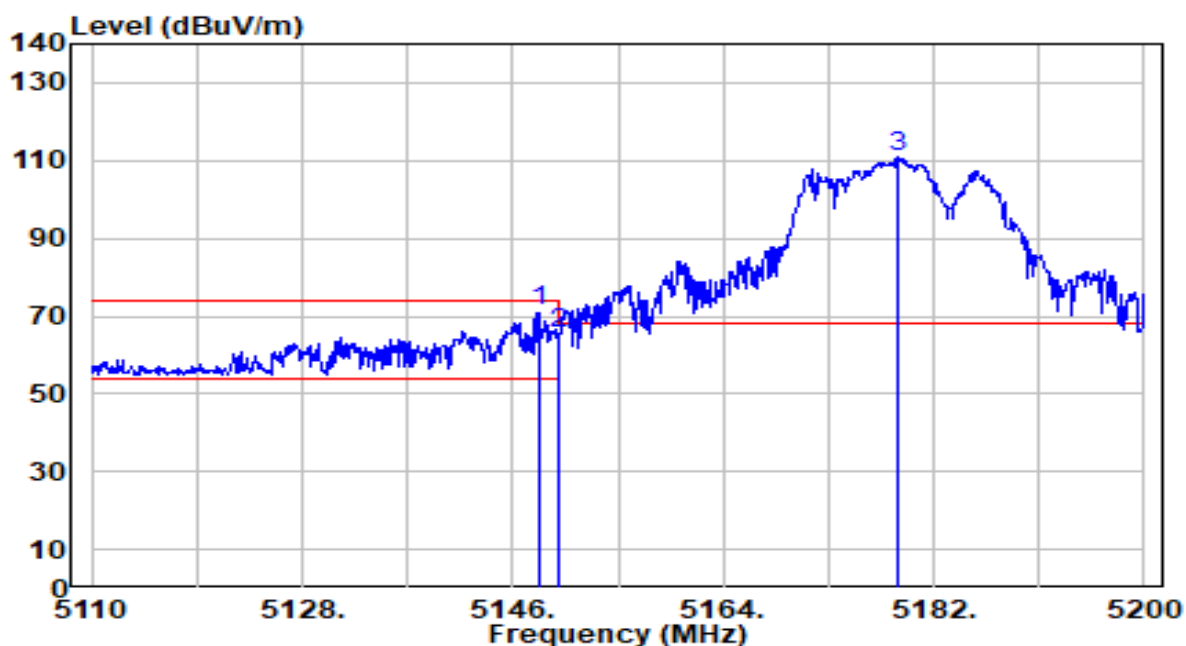


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.250	69.16	1.93	71.09	-2.91	74.00	207	115	Peak
2		5150.000	63.60	1.94	65.53	-8.47	74.00	207	115	Peak
3		5178.850	108.74	1.95	110.69	N/A	N/A	207	115	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-10
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_106+26Tone_MRU1_TX_Band1_CH 36_ANT 6+7	Test Voltage	By Notebook PC

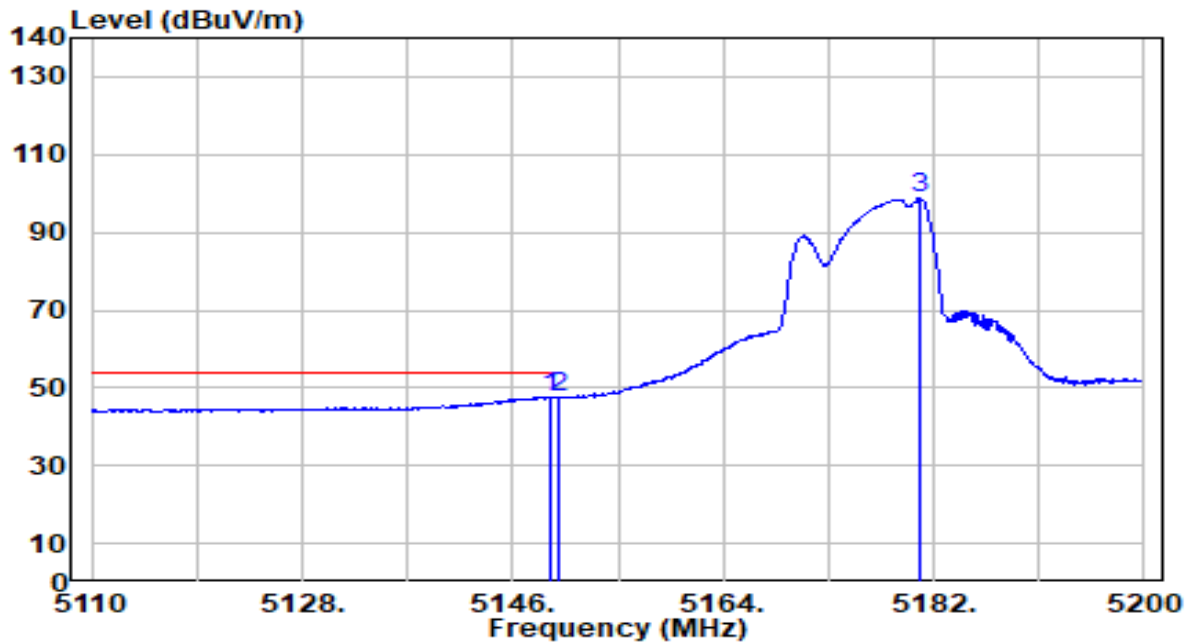


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.150	45.80	1.94	47.73	-6.27	54.00	207	115	Average
2		5150.000	45.73	1.94	47.66	-6.34	54.00	207	115	Average
3		5180.740	96.68	1.96	98.63	N/A	N/A	207	115	Average

Note:

1. " * ", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-10
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_106+26Tone_MRU1_TX_Band1_CH 36_ANT 6+7	Test Voltage	By Notebook PC

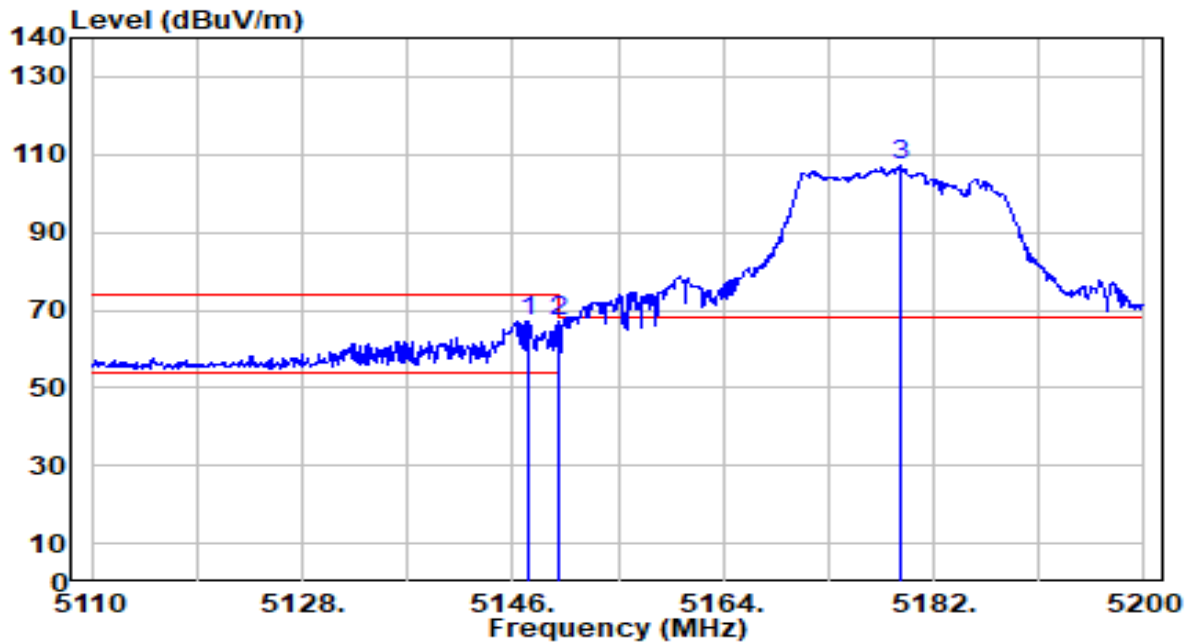


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5147.260	65.22	1.93	67.15	-6.85	74.00	209	360	Peak
2	* 5150.000	65.26	1.94	67.20	-6.80	74.00	209	360	Peak
3	5179.210	105.03	1.95	106.99	N/A	N/A	209	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-10
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_106+26Tone_MRU1_TX_Band1_CH 36_ANT 6+7	Test Voltage	By Notebook PC

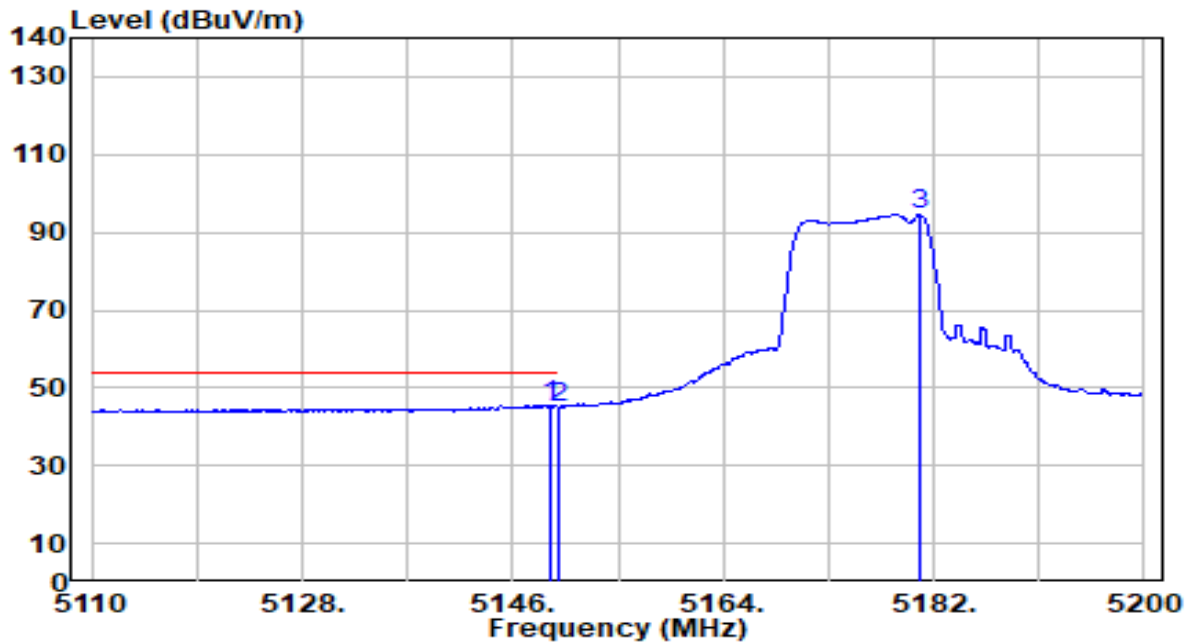


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.330	43.58	1.94	45.52	-8.48	54.00	209	360	Average
2		5150.000	43.16	1.94	45.10	-8.90	54.00	209	360	Average
3		5180.740	92.59	1.96	94.55	N/A	N/A	209	360	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-10
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_52+26Tone_MRU3_TX_Band2_CH 64_ANT 6+7	Test Voltage	By Notebook PC

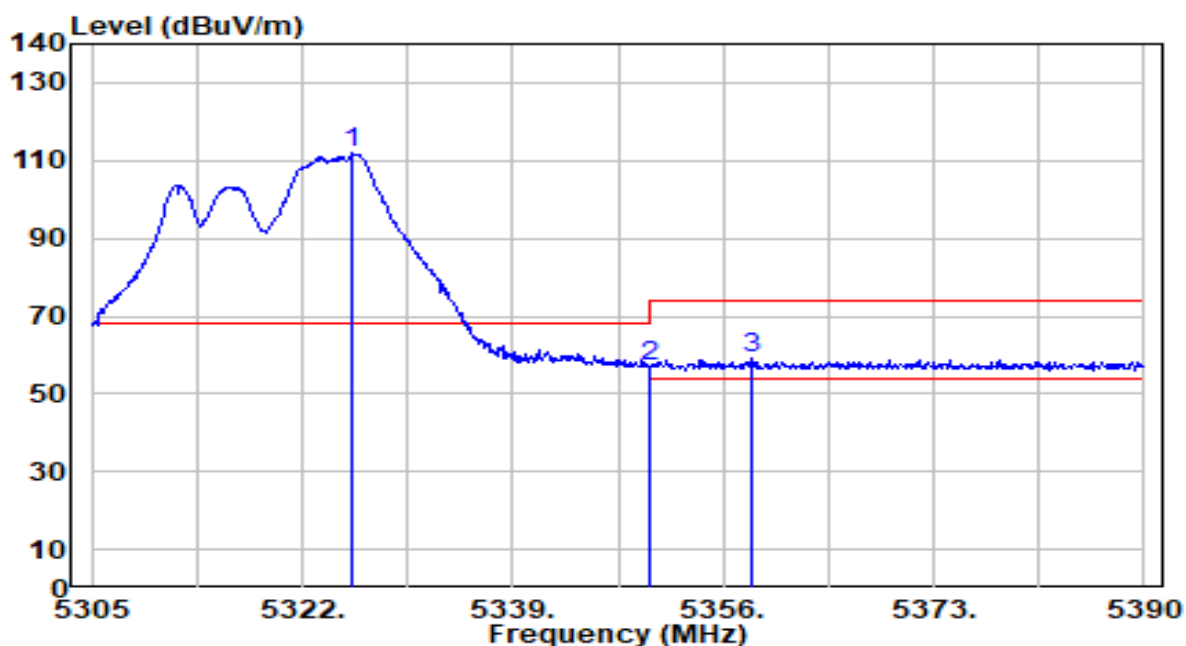


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5326.080	109.91	1.91	111.82	N/A	N/A	247	128	Peak
2	5350.000	55.03	1.90	56.93	-17.07	74.00	247	128	Peak
3	* 5358.380	57.36	1.90	59.26	-14.74	74.00	247	128	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-10
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_52+26Tone_MRU3_TX_Band2_CH 64_ANT 6+7	Test Voltage	By Notebook PC

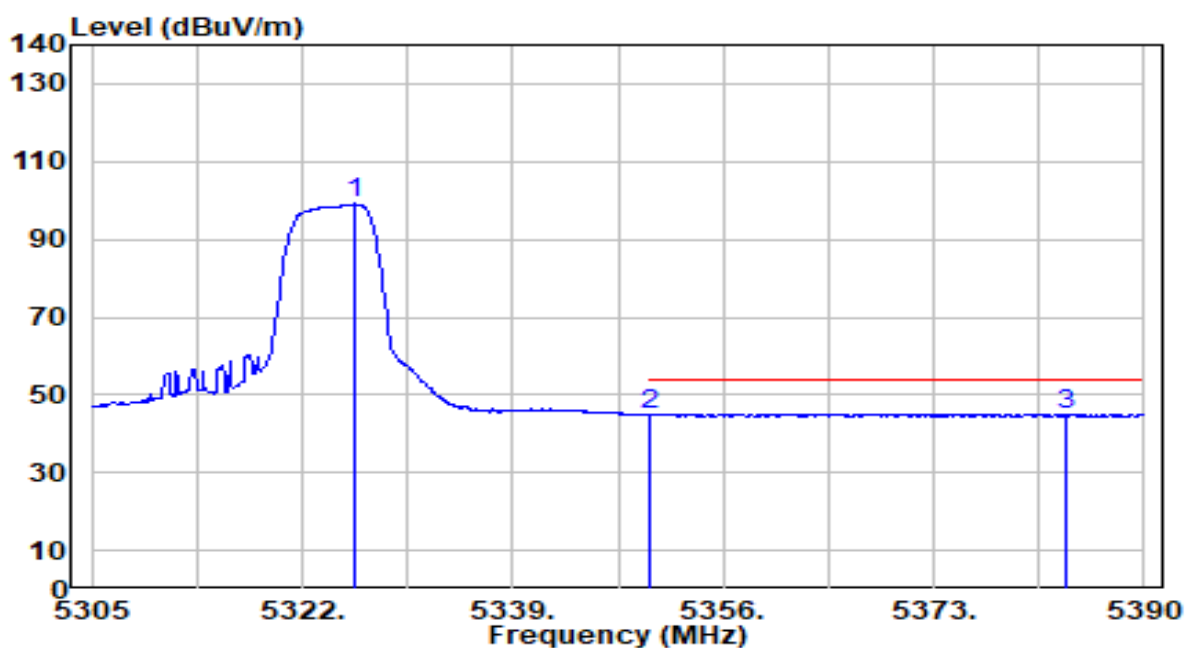


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5326.335	97.28	1.91	99.19	N/A	N/A	247	128	Average
2	5350.000	42.90	1.90	44.81	-9.19	54.00	247	128	Average
3	* 5383.710	43.19	1.89	45.08	-8.92	54.00	247	128	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-10
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_52+26Tone_MRU3_TX_Band2_CH 64_ANT 6+7	Test Voltage	By Notebook PC

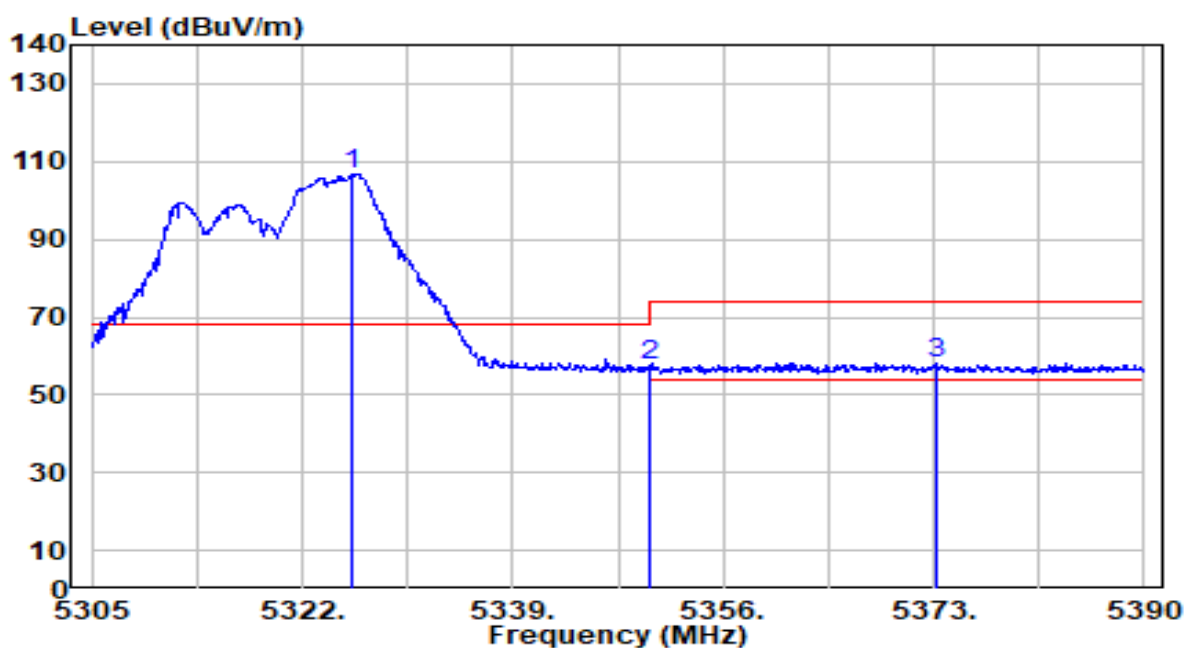


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5326.080	105.04	1.91	106.95	N/A	N/A	207	0	Peak
2	5350.000	55.92	1.90	57.83	-16.17	74.00	207	0	Peak
3	* 5373.170	56.16	1.90	58.05	-15.95	74.00	207	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-10
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_52+26Tone_MRU3_TX_Band2_CH 64_ANT 6+7	Test Voltage	By Notebook PC

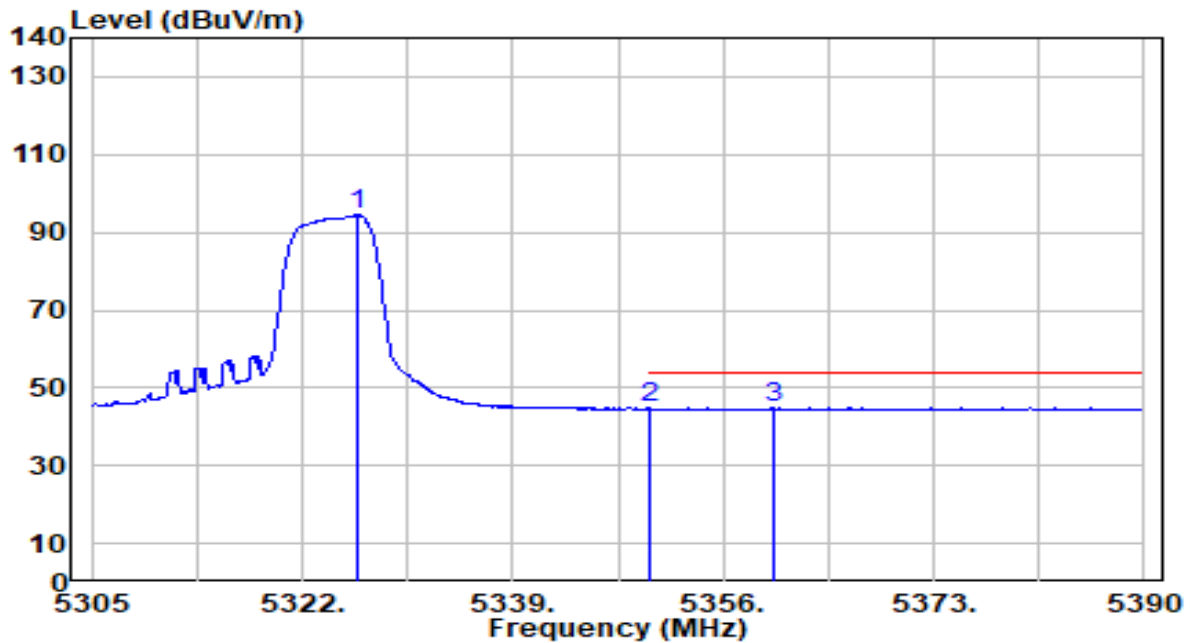


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5326.505	92.56	1.91	94.48	N/A	N/A	207	0	Average
2	5350.000	42.77	1.90	44.67	-9.33	54.00	207	0	Average
3	* 5359.995	42.97	1.90	44.87	-9.13	54.00	207	0	Average

Note:

1. " * ", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-10
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_106+26Tone_MRU2_TX_Band2_CH 64_ANT 6+7	Test Voltage	By Notebook PC

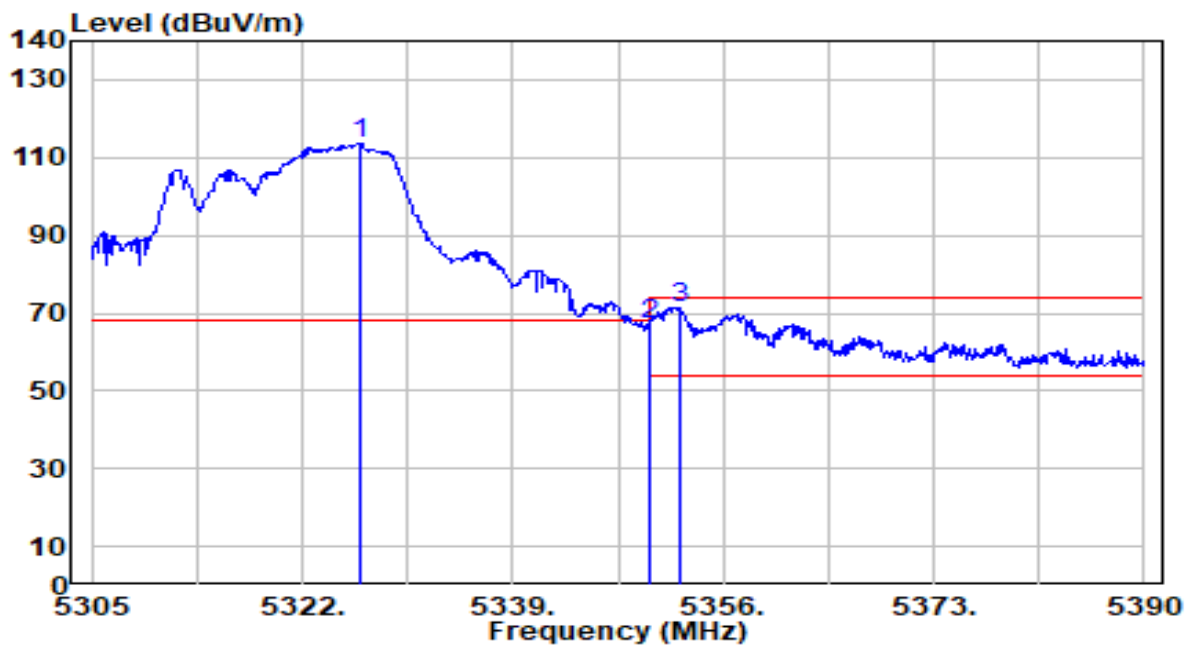


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5326.590	111.74	1.91	113.65	N/A	N/A	248	120	Peak
2	5350.000	65.26	1.90	67.16	-6.84	74.00	248	120	Peak
3	* 5352.430	69.62	1.90	71.53	-2.47	74.00	248	120	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-10
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_106+26Tone_MRU2_TX_Band2_CH 64_ANT 6+7	Test Voltage	By Notebook PC

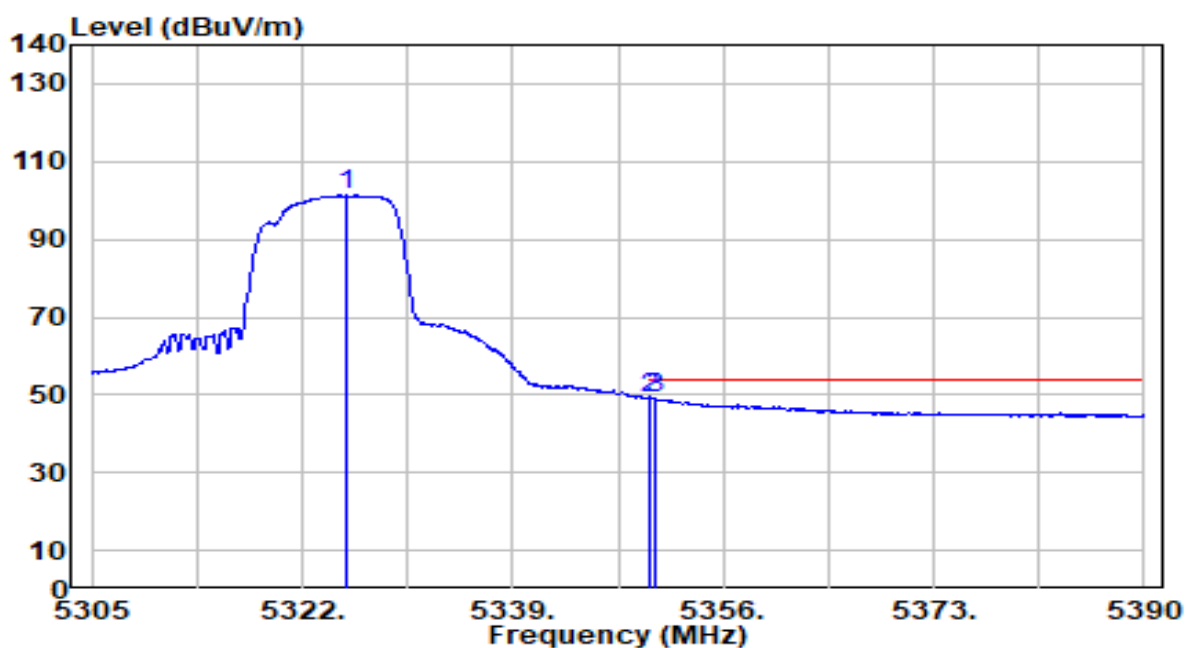


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5325.485	99.31	1.91	101.22	N/A	N/A	248	120	Average
2	*	5350.000	47.02	1.90	48.93	-5.07	54.00	248	120	Average
3		5350.560	47.01	1.90	48.92	-5.08	54.00	248	120	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-10
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_106+26Tone_MRU2_TX_Band2_CH 64_ANT 6+7	Test Voltage	By Notebook PC

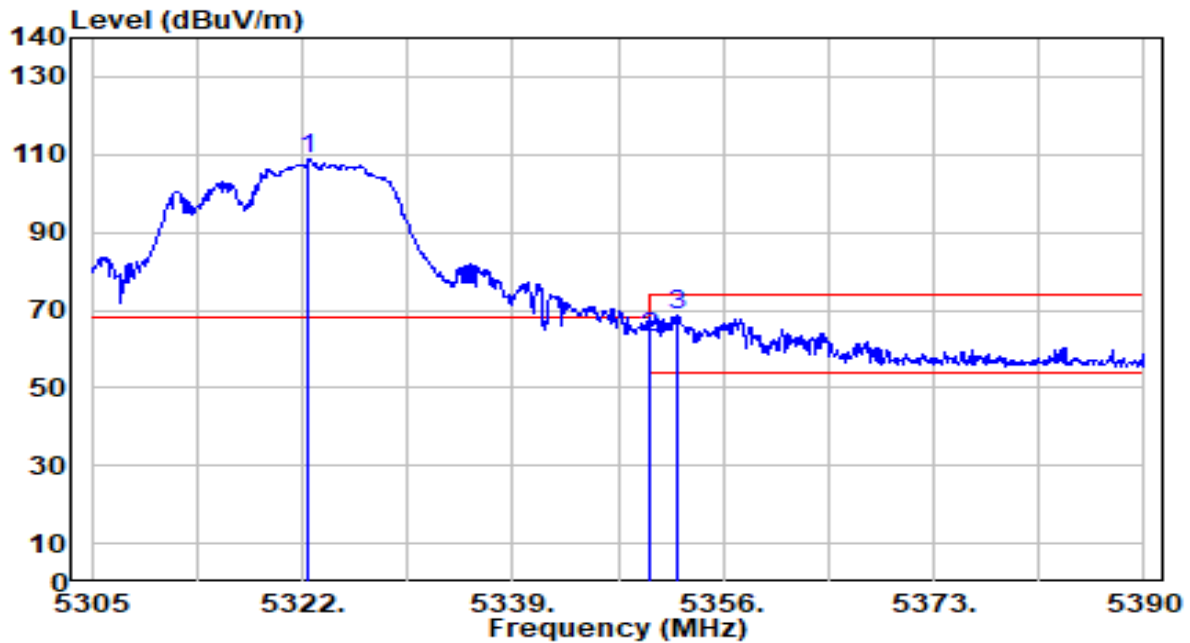


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5322.510	107.14	1.91	109.05	N/A	N/A	272	69	Peak
2	5350.000	60.86	1.90	62.76	-11.24	74.00	272	69	Peak
3	* 5352.260	66.60	1.90	68.51	-5.49	74.00	272	69	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-10
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_106+26Tone_MRU2_TX_Band2_CH 64_ANT 6+7	Test Voltage	By Notebook PC

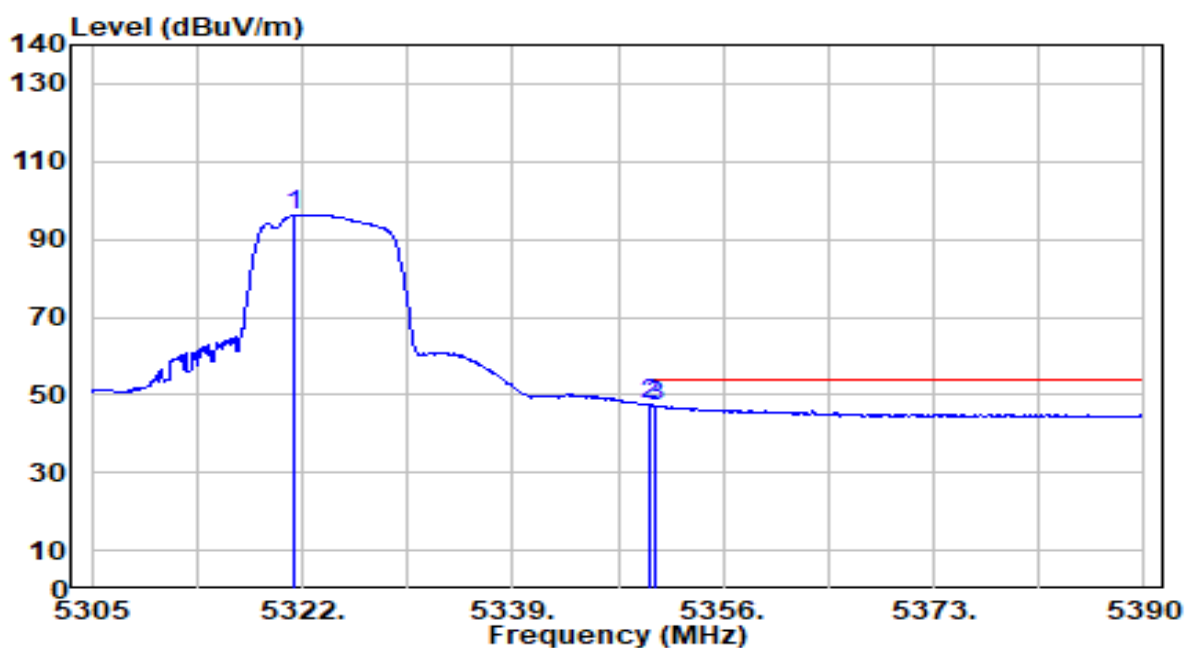


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5321.235	94.39	1.91	96.30	N/A	N/A	272	69	Average
2	*	5350.000	45.56	1.90	47.46	-6.54	54.00	272	69	Average
3		5350.560	45.35	1.90	47.25	-6.75	54.00	272	69	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-10
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_52+26Tone_MRU1_TX_Band3_CH 100_ANT 6+7	Test Voltage	By Notebook PC

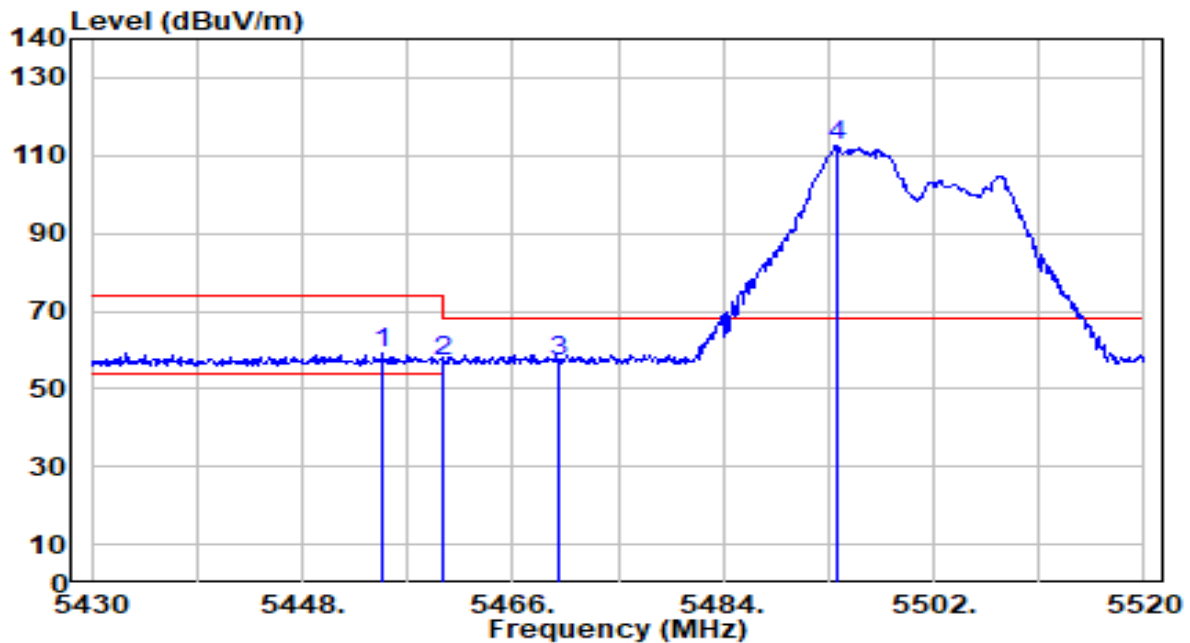


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5454.840	56.99	2.06	59.04	-14.96	74.00	202	360	Peak
2	5460.000	54.82	2.07	56.89	-17.11	74.00	202	360	Peak
3	* 5470.000	54.93	2.11	57.04	-11.16	68.20	202	360	Peak
4	5493.810	110.26	2.18	112.44	N/A	N/A	202	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-10
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_52+26Tone_MRU1_TX_Band3_CH 100_ANT 6+7	Test Voltage	By Notebook PC

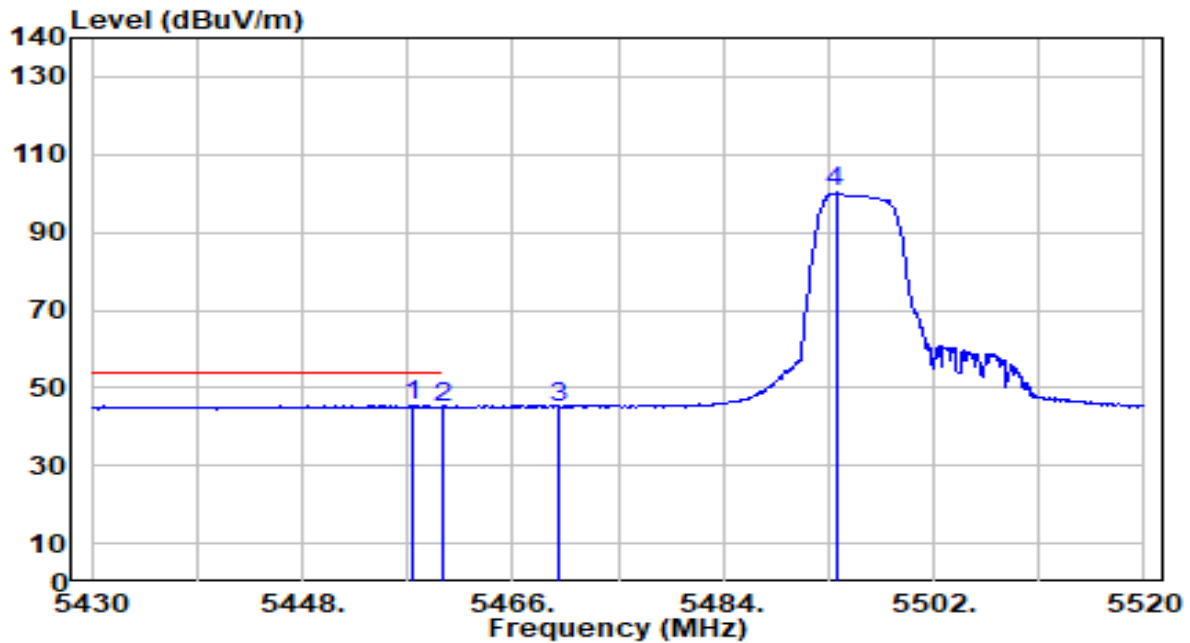


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5457.450	43.31	2.07	45.38	-8.62	54.00	202	360	Average
2		5460.000	43.03	2.07	45.11	-8.89	54.00	202	360	Average
3		5470.000	42.93	2.11	45.04	N/A	N/A	202	360	Average
4		5493.630	97.95	2.18	100.13	N/A	N/A	202	360	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-10
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_52+26Tone_MRU1_TX_Band3_CH 100_ANT 6+7	Test Voltage	By Notebook PC

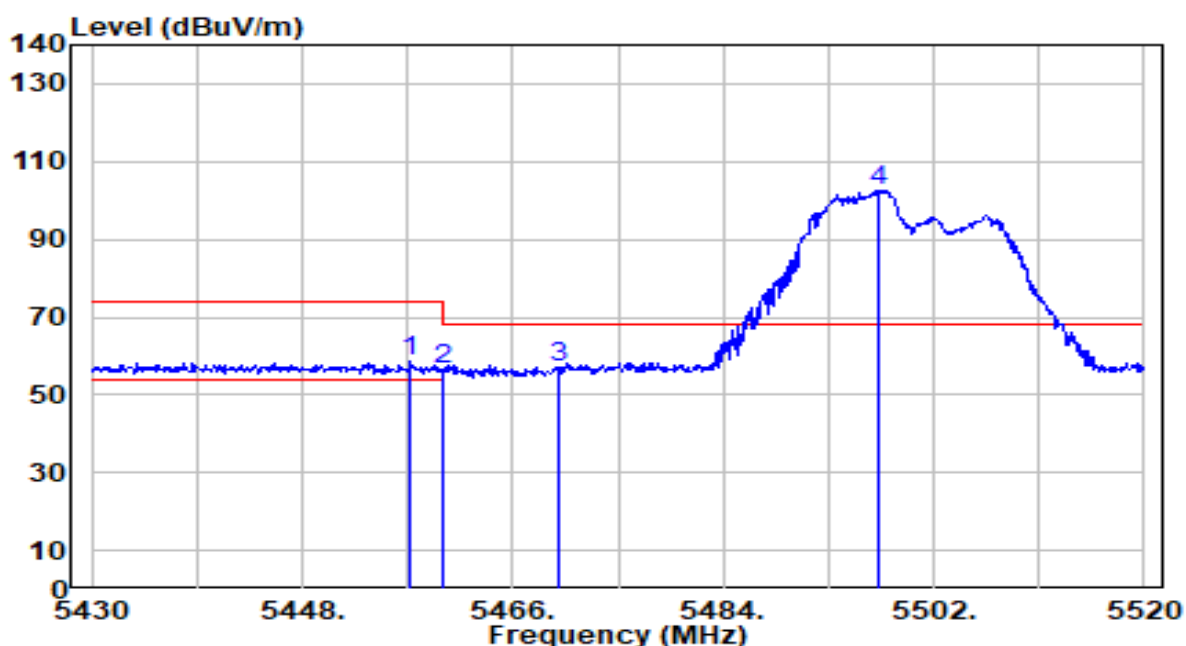


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5457.180	56.44	2.07	58.51	-15.49	74.00	298	45	Peak
2	5460.000	54.70	2.07	56.78	-17.22	74.00	298	45	Peak
3	* 5470.000	55.00	2.11	57.11	-11.09	68.20	298	45	Peak
4	5497.230	100.41	2.19	102.61	N/A	N/A	298	45	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-10
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_52+26Tone_MRU1_TX_Band3_CH 100_ANT 6+7	Test Voltage	By Notebook PC

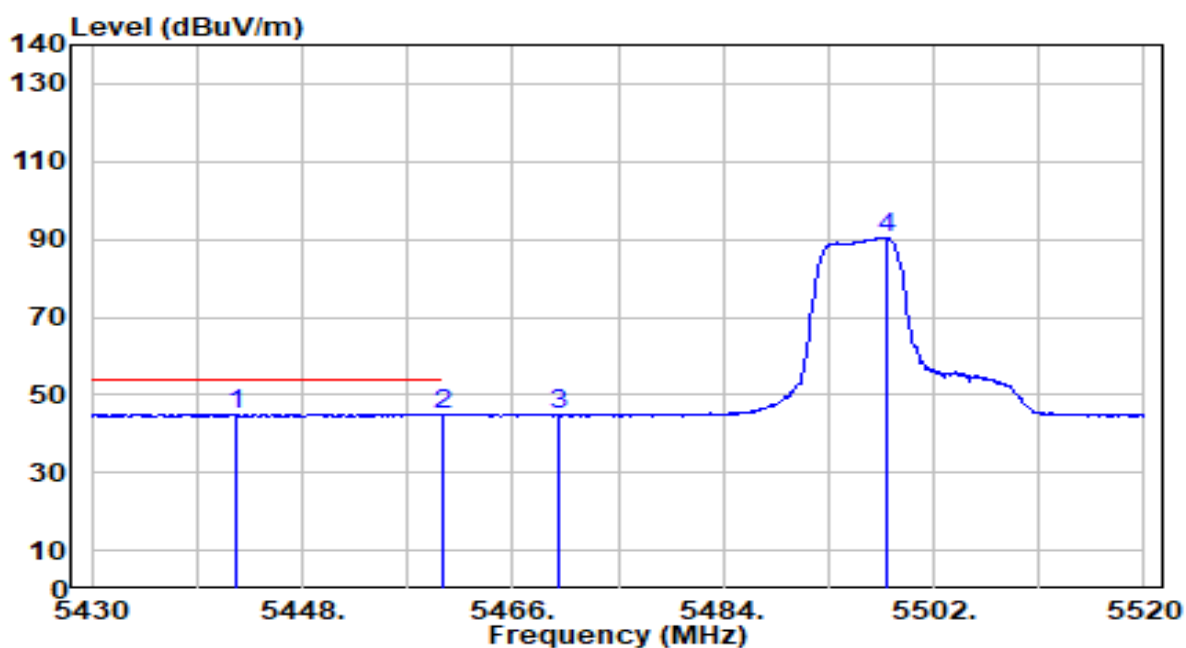


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5442.420	43.00	2.02	45.02	-8.98	54.00	298	45	Average
2		5460.000	42.79	2.07	44.87	-9.13	54.00	298	45	Average
3		5470.000	42.66	2.11	44.77	N/A	N/A	298	45	Average
4		5498.040	88.17	2.19	90.37	N/A	N/A	298	45	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-10
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_52+26Tone_MRU3_TX_Band3_CH 140_ANT 6+7	Test Voltage	By Notebook PC

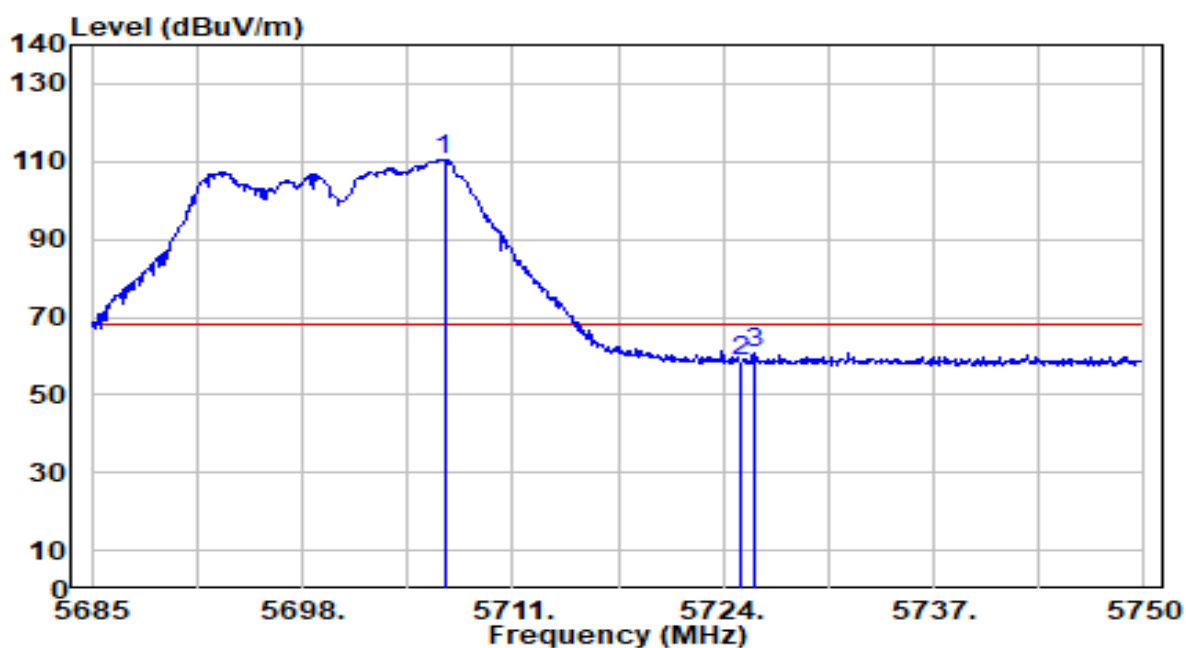


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5706.775	107.50	3.15	110.65	N/A	N/A	202	360	Peak
2	5725.000	55.48	3.25	58.73	-9.47	68.20	202	360	Peak
3	* 5725.950	57.34	3.26	60.60	-7.60	68.20	202	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-10
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_52+26Tone_MRU3_TX_Band3_CH 140_ANT 6+7	Test Voltage	By Notebook PC

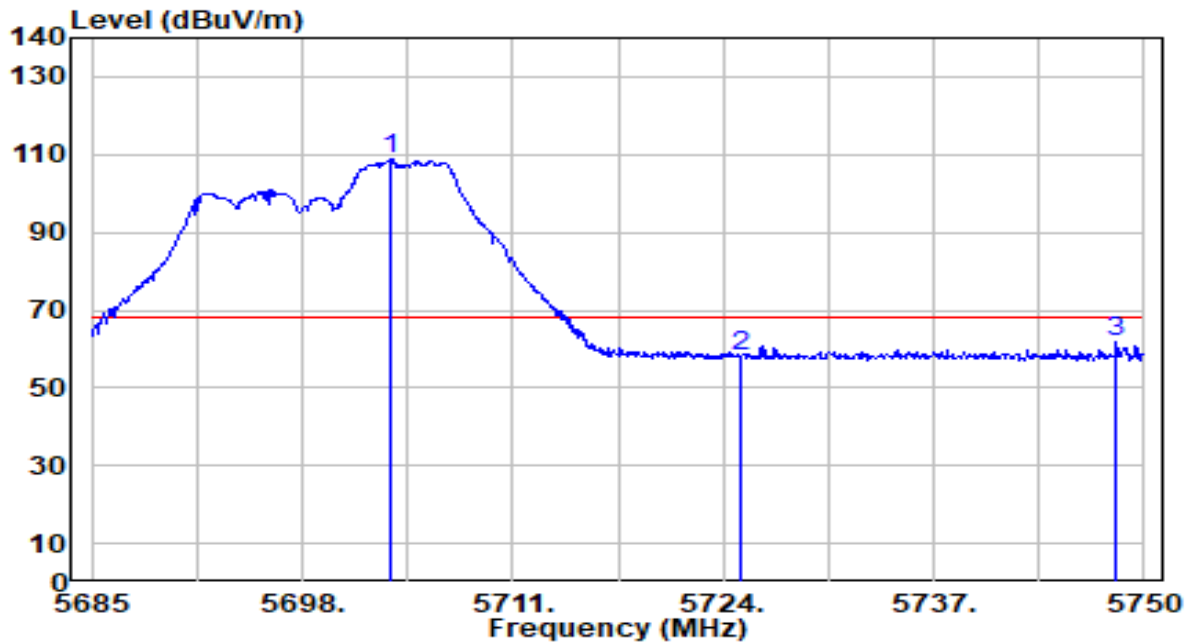


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5703.525	105.57	3.14	108.70	N/A	N/A	202	286	Peak
2	5725.000	54.85	3.25	58.11	-10.09	68.20	202	286	Peak
3	* 5748.245	58.56	3.38	61.94	-6.26	68.20	202	286	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-10
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_106+26Tone_MRU1_TX_Band3_CH 100_ANT 6+7	Test Voltage	By Notebook PC

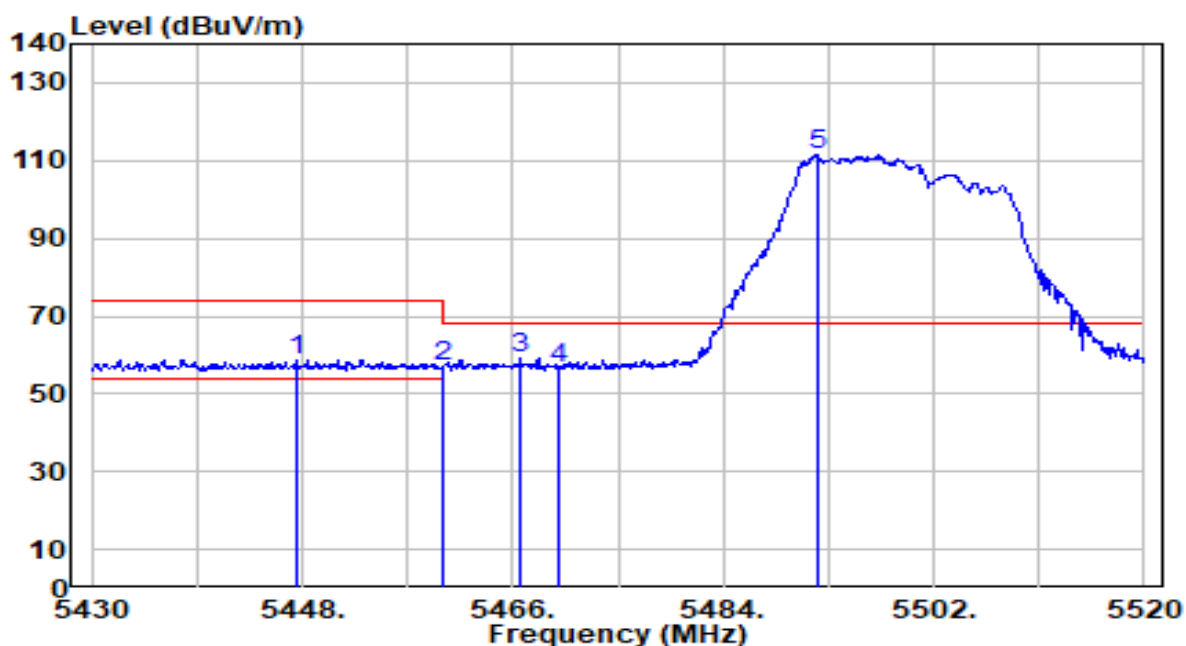


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5447.550	56.79	2.04	58.82	-15.18	74.00	254	360	Peak
2	5460.000	55.02	2.07	57.09	-16.91	74.00	254	360	Peak
3	* 5466.720	57.11	2.10	59.21	-8.99	68.20	254	360	Peak
4	5470.000	54.26	2.11	56.36	-11.84	68.20	254	360	Peak
5	5492.010	109.06	2.17	111.24	N/A	N/A	254	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-10
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_106+26Tone_MRU1_TX_Band3_CH100_ANT 6+7	Test Voltage	By Notebook PC

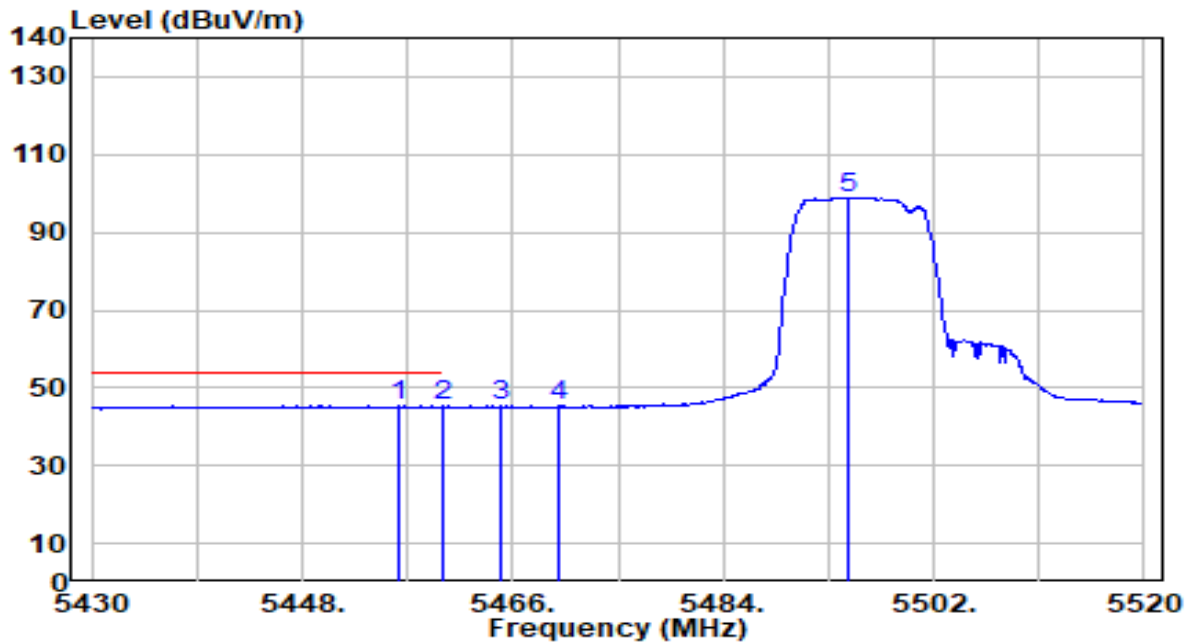


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5456.280	43.22	2.06	45.29	-8.71	54.00	254	360	Average
2		5460.000	43.14	2.07	45.21	-8.79	54.00	254	360	Average
3		5464.920	43.13	2.09	45.22	N/A	N/A	254	360	Average
4		5470.000	43.10	2.11	45.21	N/A	N/A	254	360	Average
5		5494.800	96.72	2.18	98.90	N/A	N/A	254	360	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-10
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_106+26Tone_MRU1_TX_Band3_CH 100_ANT 6+7	Test Voltage	By Notebook PC

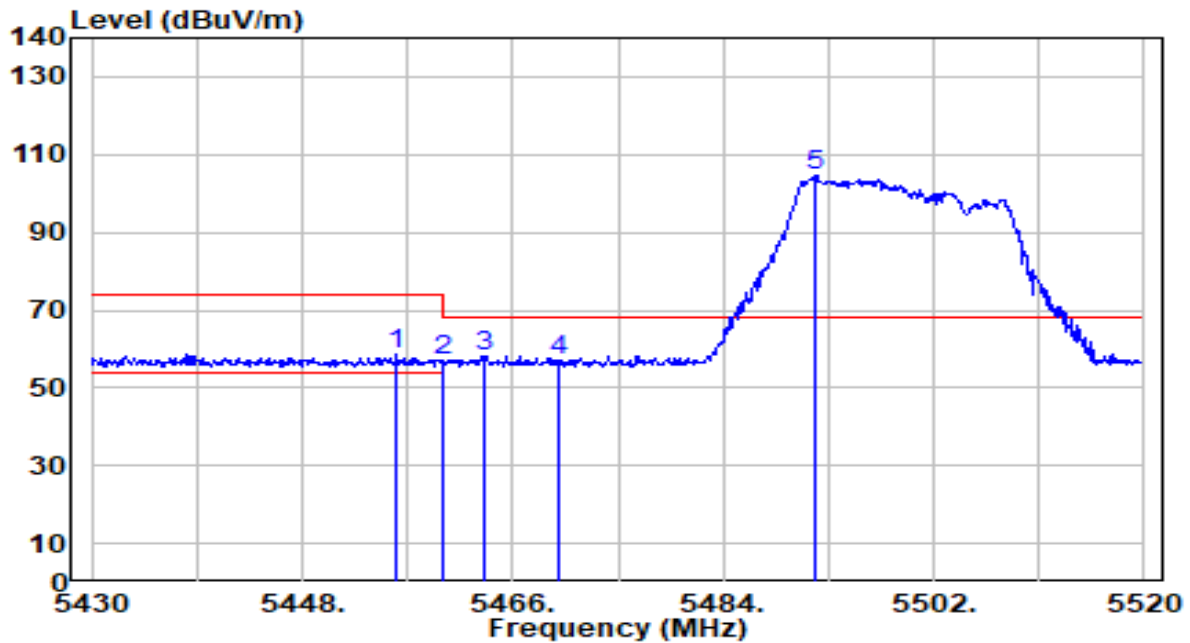


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5456.010	56.61	2.06	58.68	-15.32	74.00	264	274	Peak
2	5460.000	54.74	2.07	56.81	-17.19	74.00	264	274	Peak
3	* 5463.480	56.26	2.09	58.35	-9.85	68.20	264	274	Peak
4	5470.000	55.19	2.11	57.29	-10.91	68.20	264	274	Peak
5	5491.830	102.42	2.17	104.59	N/A	N/A	264	274	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-10
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_106+26Tone_MRU1_TX_Band3_CH100_ANT 6+7	Test Voltage	By Notebook PC

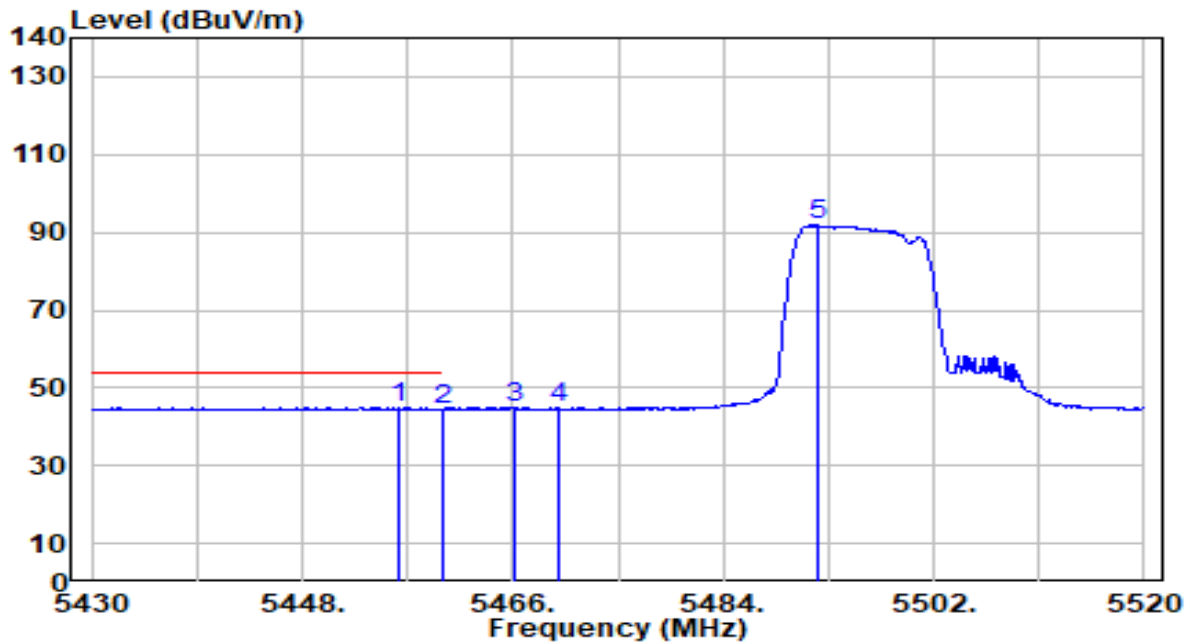


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5456.370	42.97	2.06	45.03	-8.97	54.00	264	274	Average
2		5460.000	42.39	2.07	44.46	-9.54	54.00	264	274	Average
3		5466.270	42.89	2.09	44.99	N/A	N/A	264	274	Average
4		5470.000	42.64	2.11	44.74	N/A	N/A	264	274	Average
5		5492.010	89.60	2.17	91.78	N/A	N/A	264	274	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-10
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_106+26Tone_MRU2_TX_Band3_CH140_ANT 6+7	Test Voltage	By Notebook PC

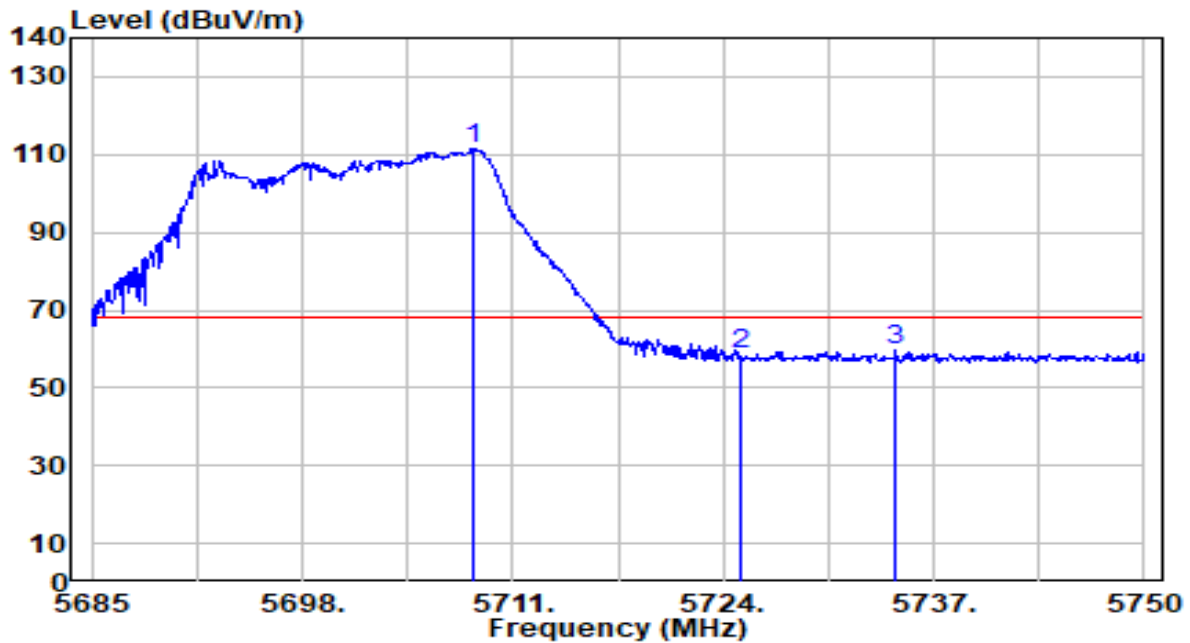


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5708.530	108.26	3.16	111.42	N/A	N/A	180	0	Peak
2	5725.000	55.31	3.25	58.56	-9.64	68.20	180	0	Peak
3	* 5734.660	56.24	3.31	59.54	-8.66	68.20	180	0	Peak

Note:

1. " * ", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-10
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_106+26Tone_MRU2_TX_Band3_CH140_ANT 6+7	Test Voltage	By Notebook PC

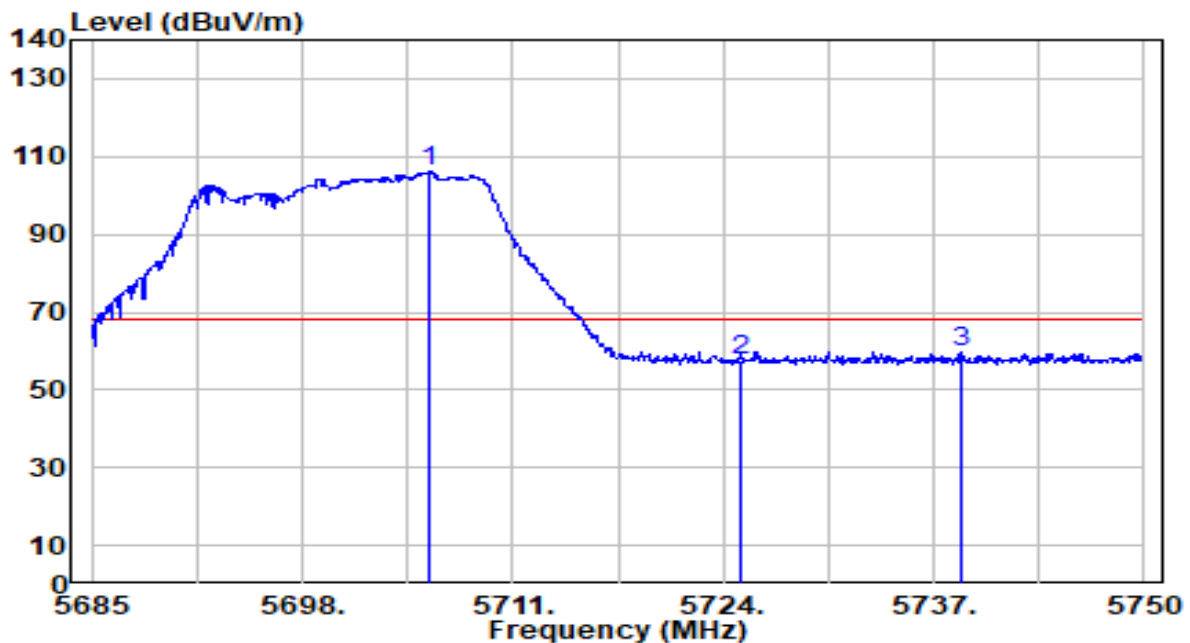


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5705.865	102.88	3.15	106.03	N/A	N/A	227	278	Peak
2	5725.000	54.36	3.25	57.62	-10.58	68.20	227	278	Peak
3	* 5738.690	56.21	3.33	59.54	-8.66	68.20	227	278	Peak

Note:

1. " * ", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-10
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_52+26Tone_MRUI_TX_Band4_CH 149_ANT 6+7	Test Voltage	By Notebook PC

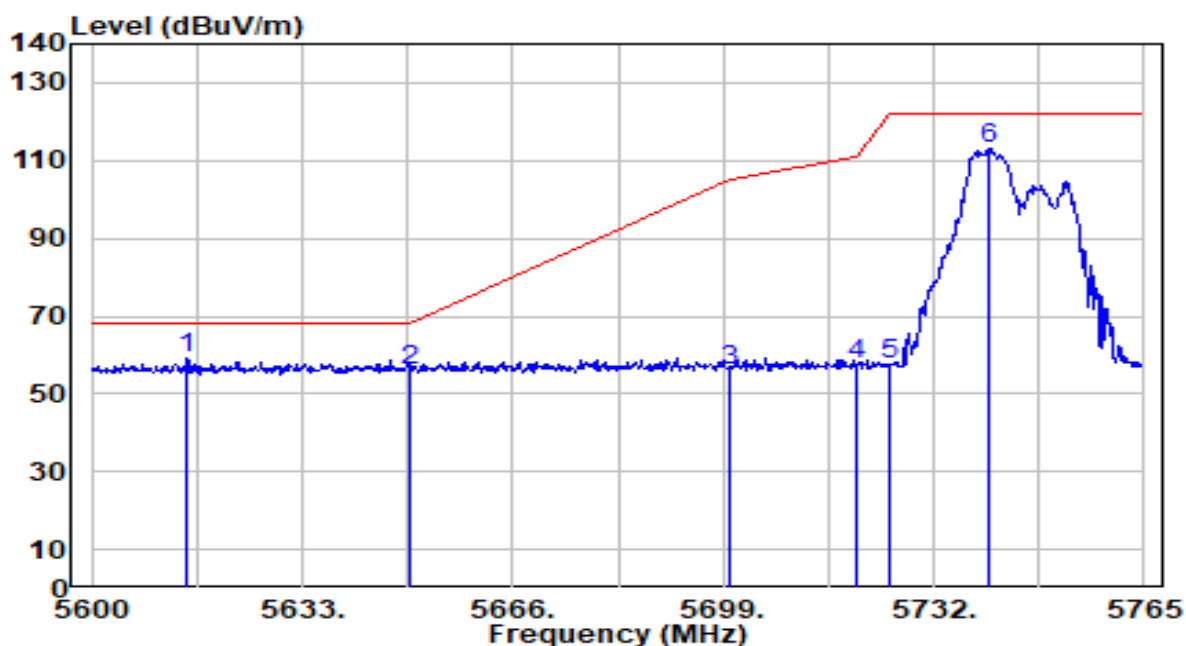


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5615.015	56.30	2.67	58.97	-9.23	68.20	200	0	Peak
2		5650.000	52.98	2.86	55.84	-12.36	68.20	200	0	Peak
3		5700.000	52.89	3.12	56.01	-49.19	105.20	200	0	Peak
4		5720.000	54.61	3.23	57.83	-52.97	110.80	200	0	Peak
5		5725.000	54.22	3.25	57.47	-64.73	122.20	200	0	Peak
6		5740.745	109.74	3.34	113.08	N/A	N/A	200	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-10
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_52+26Tone_MRU1_TX_Band4_CH149_ANT 6+7	Test Voltage	By Notebook PC

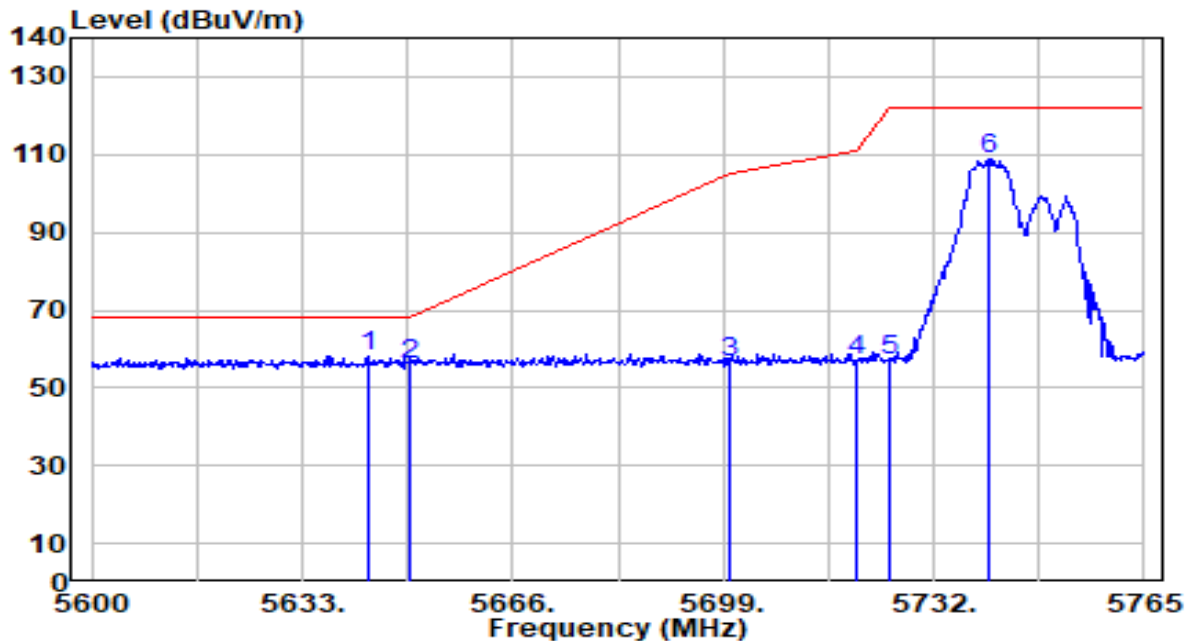


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5643.230	55.49	2.82	58.31	-9.89	68.20	172	66	Peak
2		5650.000	53.33	2.86	56.18	-12.02	68.20	172	66	Peak
3		5700.000	53.37	3.12	56.49	-48.71	105.20	172	66	Peak
4		5720.000	53.58	3.23	56.81	-53.99	110.80	172	66	Peak
5		5725.000	53.86	3.25	57.12	-65.08	122.20	172	66	Peak
6		5740.745	105.25	3.34	108.59	N/A	N/A	172	66	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-10
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_52+26Tone_MRU3_TX_Band4_CH 165_ANT 6+7	Test Voltage	By Notebook PC

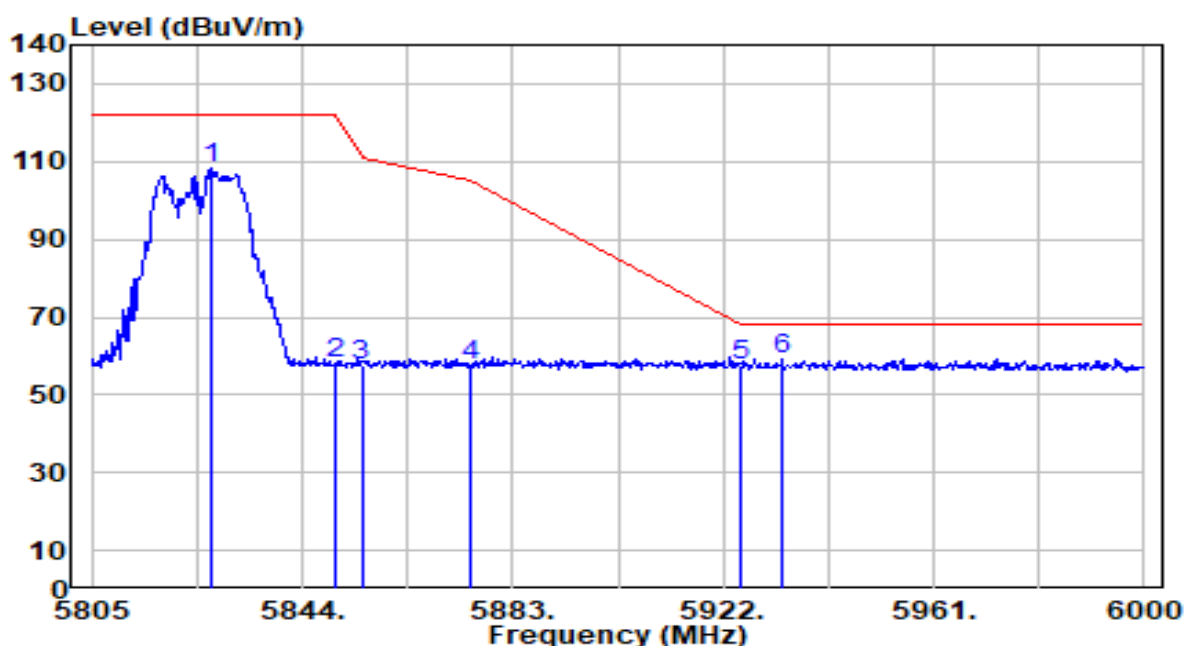


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5827.035	104.60	3.64	108.25	N/A	N/A	208	360	Peak
2	5850.000	54.47	3.63	58.10	-64.10	122.20	208	360	Peak
3	5855.000	53.85	3.63	57.48	-53.32	110.80	208	360	Peak
4	5875.000	53.91	3.61	57.52	-47.68	105.20	208	360	Peak
5	5925.000	54.18	3.59	57.77	-10.43	68.20	208	360	Peak
6	* 5932.920	55.70	3.59	59.29	-8.91	68.20	208	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-10
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_52+26Tone_MRU3_TX_Band4_CH 165_ANT 6+7	Test Voltage	By Notebook PC

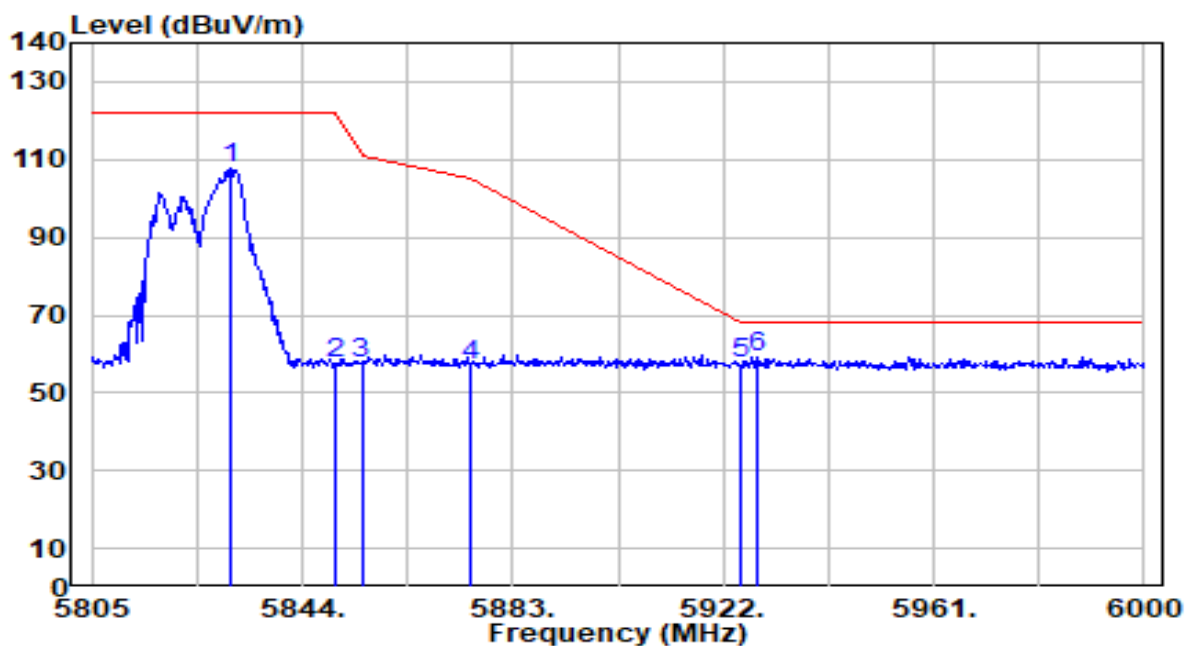


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5830.935	104.25	3.64	107.89	N/A	N/A	304	320	Peak
2	5850.000	54.03	3.63	57.66	-64.54	122.20	304	320	Peak
3	5855.000	54.06	3.63	57.68	-53.12	110.80	304	320	Peak
4	5875.000	53.19	3.61	56.81	-48.39	105.20	304	320	Peak
5	5925.000	54.06	3.59	57.66	-10.54	68.20	304	320	Peak
6	* 5928.240	55.71	3.59	59.30	-8.90	68.20	304	320	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-10
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_106+26Tone_MRU1_TX_Band4_CH149_ANT 6+7	Test Voltage	By Notebook PC

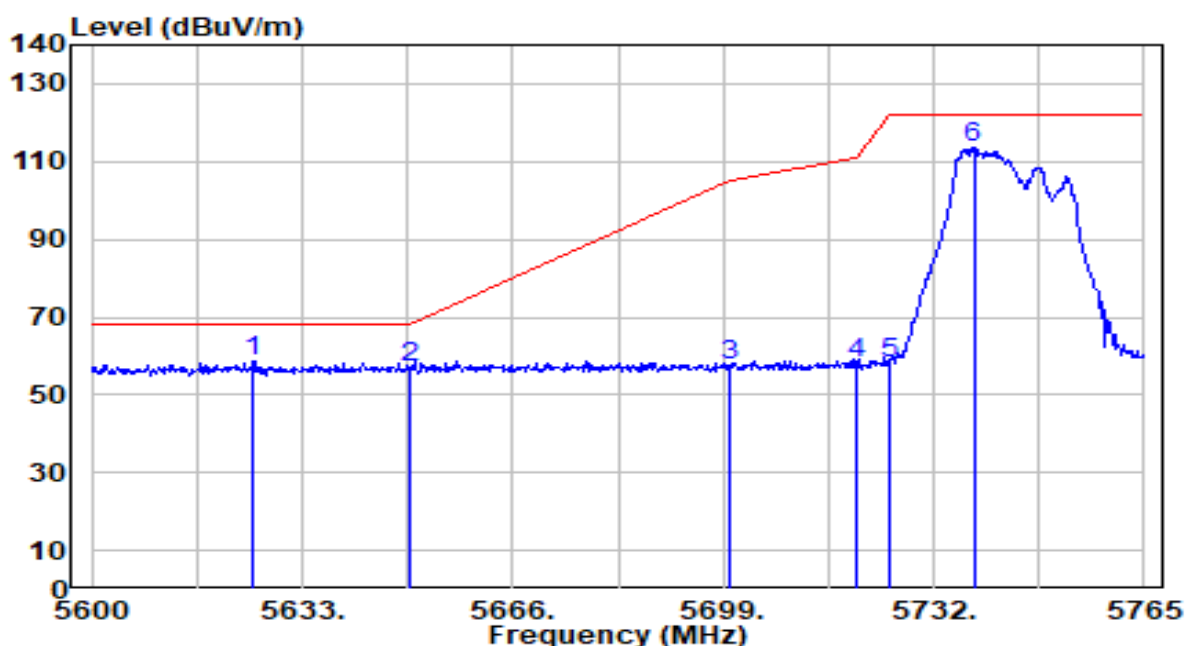


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5625.410	55.74	2.73	58.47	-9.73	68.20	200	0	Peak
2		5650.000	54.17	2.86	57.03	-11.17	68.20	200	0	Peak
3		5700.000	54.45	3.12	57.56	-47.64	105.20	200	0	Peak
4		5720.000	54.75	3.23	57.98	-52.82	110.80	200	0	Peak
5		5725.000	54.95	3.25	58.20	-64.00	122.20	200	0	Peak
6		5738.270	110.33	3.33	113.66	N/A	N/A	200	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-10
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_106+26Tone_MRU1_TX_Band4_CH 149_ANT 6+7	Test Voltage	By Notebook PC

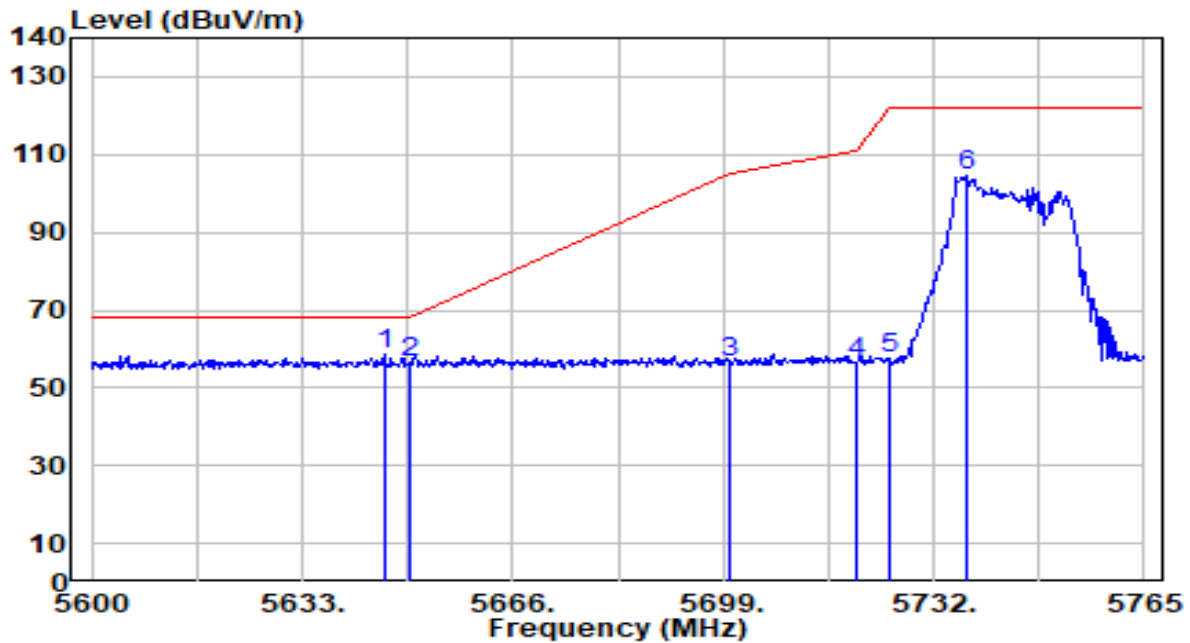


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5645.870	55.71	2.83	58.54	-9.66	68.20	255	281	Peak
2		5650.000	53.62	2.86	56.48	-11.72	68.20	255	281	Peak
3		5700.000	53.20	3.12	56.32	-48.88	105.20	255	281	Peak
4		5720.000	53.43	3.23	56.66	-54.14	110.80	255	281	Peak
5		5725.000	54.26	3.25	57.52	-64.68	122.20	255	281	Peak
6		5737.115	101.02	3.32	104.34	N/A	N/A	255	281	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-10
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_106+26Tone_MRU2_TX_Band4_CH165_ANT 6+7	Test Voltage	By Notebook PC

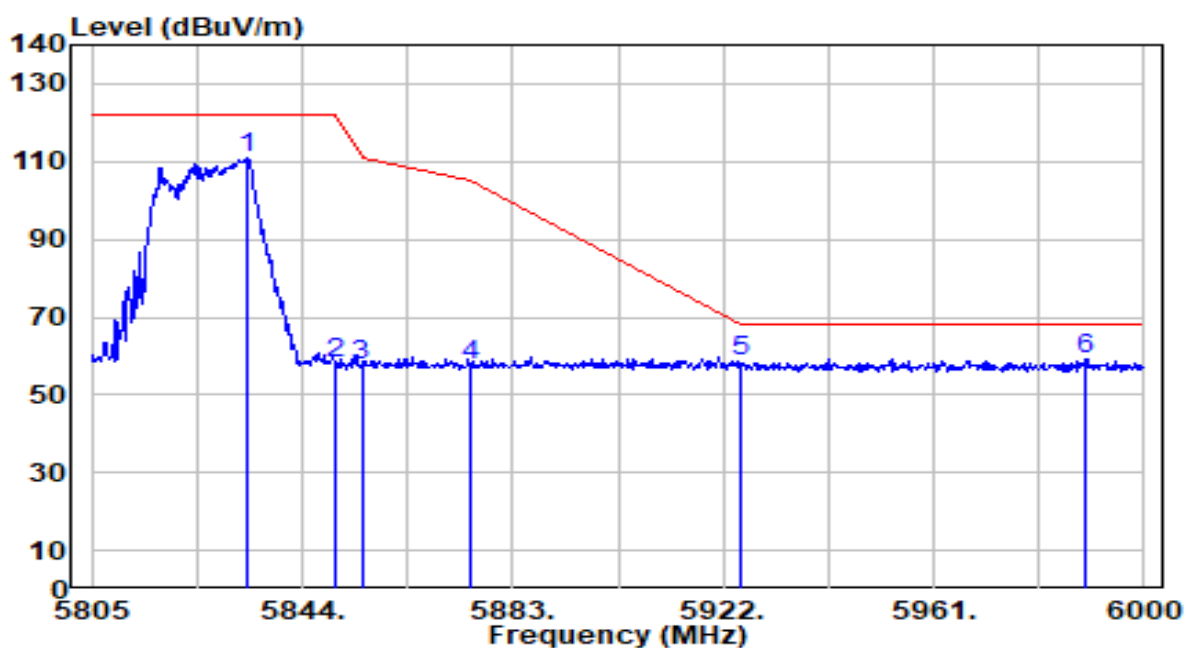


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5833.860	107.31	3.64	110.95	N/A	N/A	178	360	Peak
2	5850.000	54.57	3.63	58.20	-64.00	122.20	178	360	Peak
3	5855.000	54.10	3.63	57.72	-53.08	110.80	178	360	Peak
4	5875.000	54.23	3.61	57.84	-47.36	105.20	178	360	Peak
5	5925.000	55.25	3.59	58.84	-9.36	68.20	178	360	Peak
6	* 5989.275	55.62	3.58	59.21	-8.99	68.20	178	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-10
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_106+26Tone_MRU2_TX_Band4_CH 165_ANT 6+7	Test Voltage	By Notebook PC

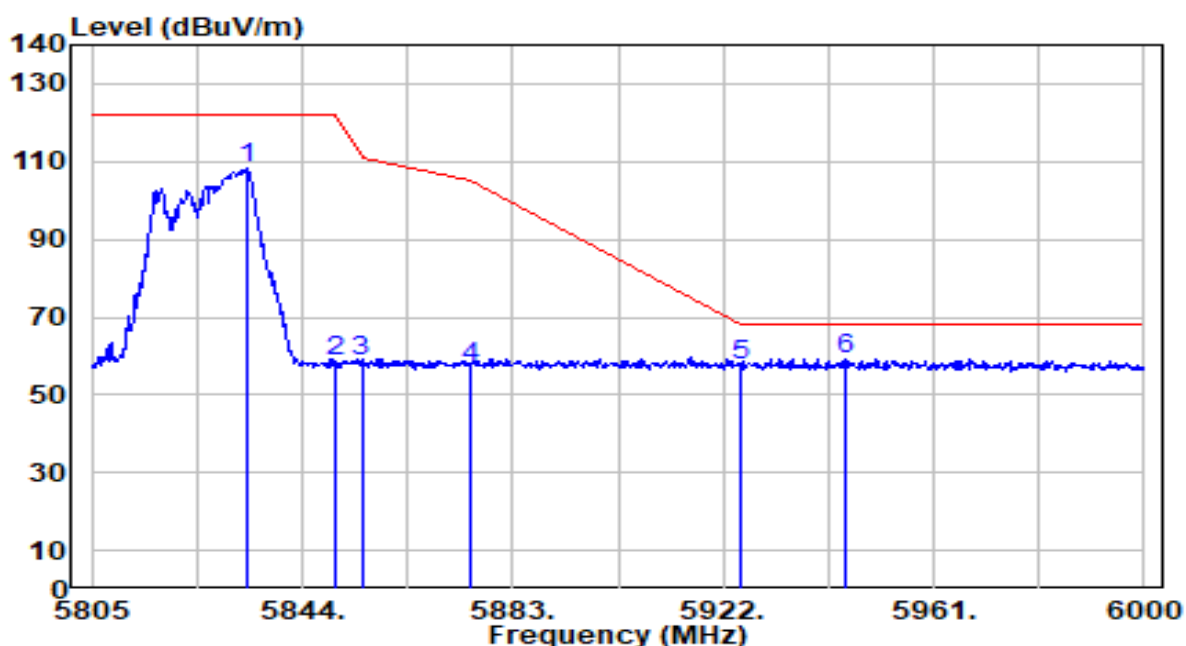


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5833.665	104.54	3.64	108.18	N/A	N/A	304	322	Peak
2	5850.000	55.13	3.63	58.76	-63.44	122.20	304	322	Peak
3	5855.000	55.23	3.63	58.85	-51.95	110.80	304	322	Peak
4	5875.000	53.30	3.61	56.91	-48.29	105.20	304	322	Peak
5	5925.000	54.06	3.59	57.66	-10.54	68.20	304	322	Peak
6	* 5944.425	55.72	3.59	59.31	-8.89	68.20	304	322	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-23
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-80MHz_484+242Tone_MRU4_TX_Band1_CH 42_ANT 6+7	Test Voltage	By Notebook PC

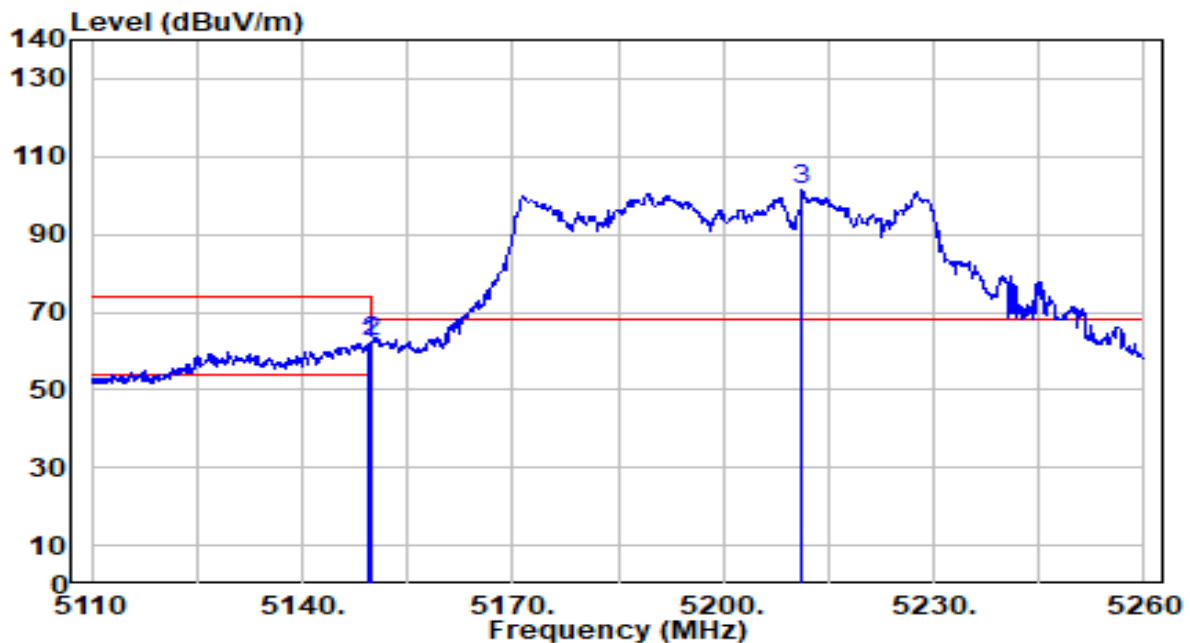


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5149.450	59.82	1.94	61.75	-12.25	74.00	187	101	Peak
2	* 5150.000	60.18	1.94	62.11	-11.89	74.00	187	101	Peak
3	5211.250	99.32	1.96	101.28	N/A	N/A	187	101	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-23
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-80MHz_484+242Tone_MRU4_TX_Band1_CH 42_ANT 6+7	Test Voltage	By Notebook PC

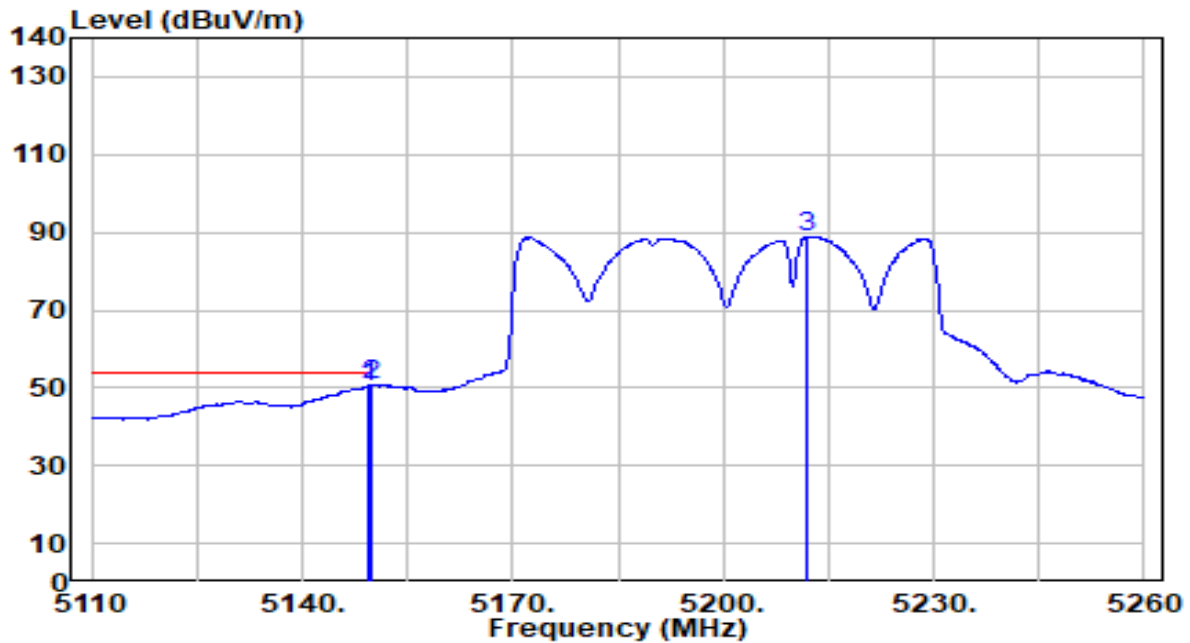


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5149.450	48.41	1.94	50.35	-3.65	54.00	187	101	Average
2	* 5150.000	48.66	1.94	50.60	-3.40	54.00	187	101	Average
3	5212.000	86.94	1.96	88.91	N/A	N/A	187	101	Average

Note:

1. " * ", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-23
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-80MHz_484+242Tone_MRU4_TX_Band1_CH 42_ANT 6+7	Test Voltage	By Notebook PC

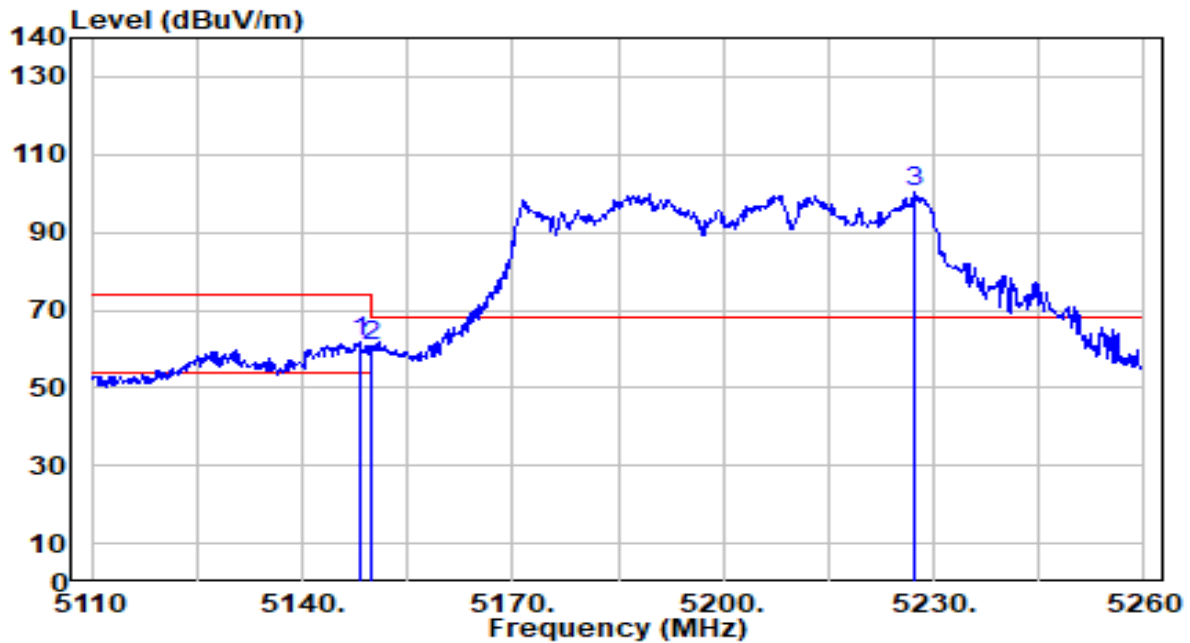


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.100	59.73	1.93	61.66	-12.34	74.00	162	279	Peak
2		5150.000	58.59	1.94	60.52	-13.48	74.00	162	279	Peak
3		5227.300	98.26	1.96	100.22	N/A	N/A	162	279	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-23
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-80MHz_484+242Tone_MRU4_TX_Band1_CH 42_ANT 6+7	Test Voltage	By Notebook PC

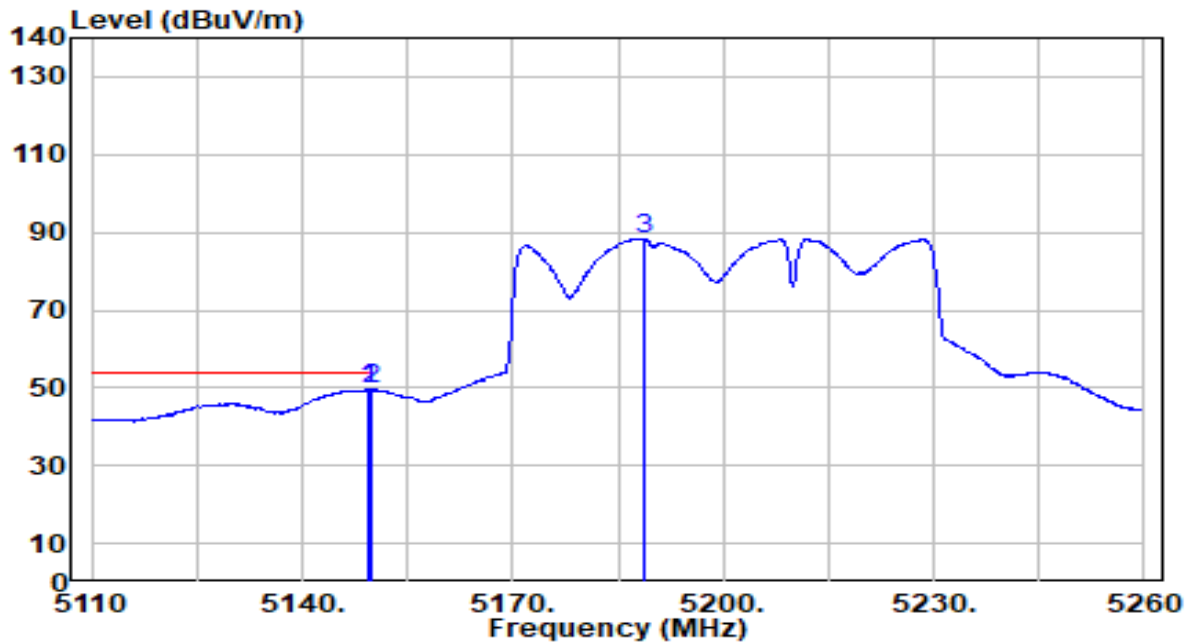


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5149.450	47.61	1.94	49.55	-4.45	54.00	162	279	Average
2	*	5150.000	47.71	1.94	49.65	-4.35	54.00	162	279	Average
3		5188.600	86.41	1.96	88.37	N/A	N/A	162	279	Average

Note:

1. " * ", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-23
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-80MHz_484+242Tone_MRU1_TX_Band2_CH 58_ANT 6+7	Test Voltage	By Notebook PC

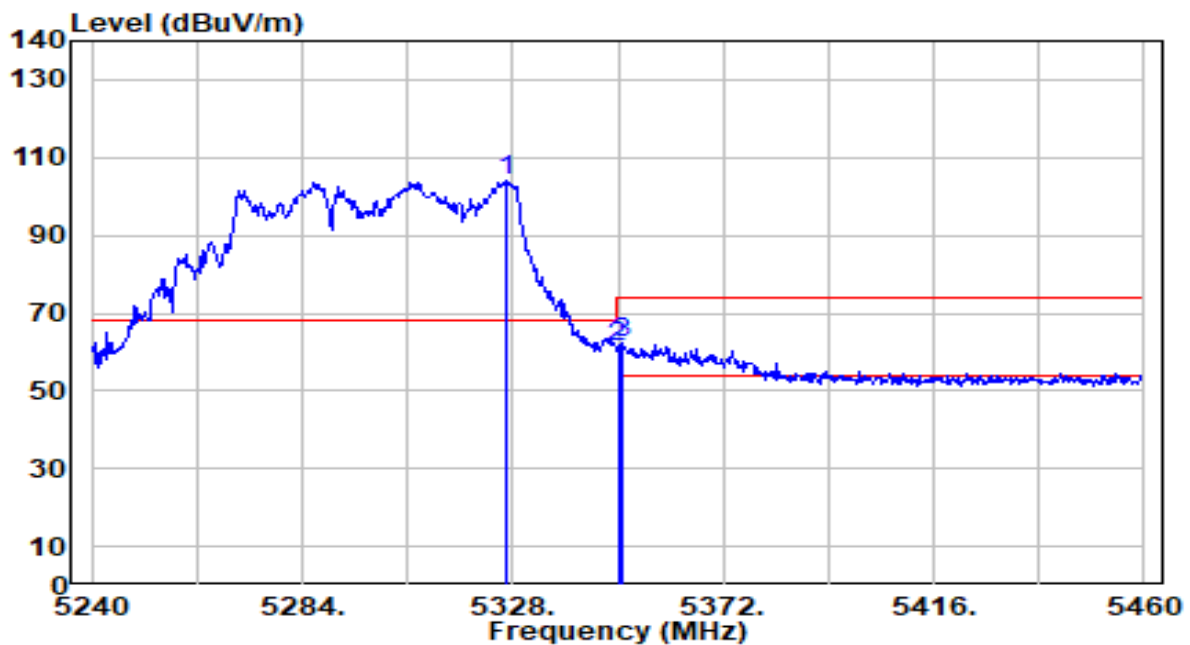


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5326.680	102.10	1.91	104.02	N/A	N/A	250	15	Peak
2	5350.000	59.31	1.90	61.22	-12.78	74.00	250	15	Peak
3	* 5351.100	60.53	1.90	62.44	-11.56	74.00	250	15	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-23
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-80MHz_484+242Tone_MRU1_TX_Band2_CH 58_ANT 6+7	Test Voltage	By Notebook PC

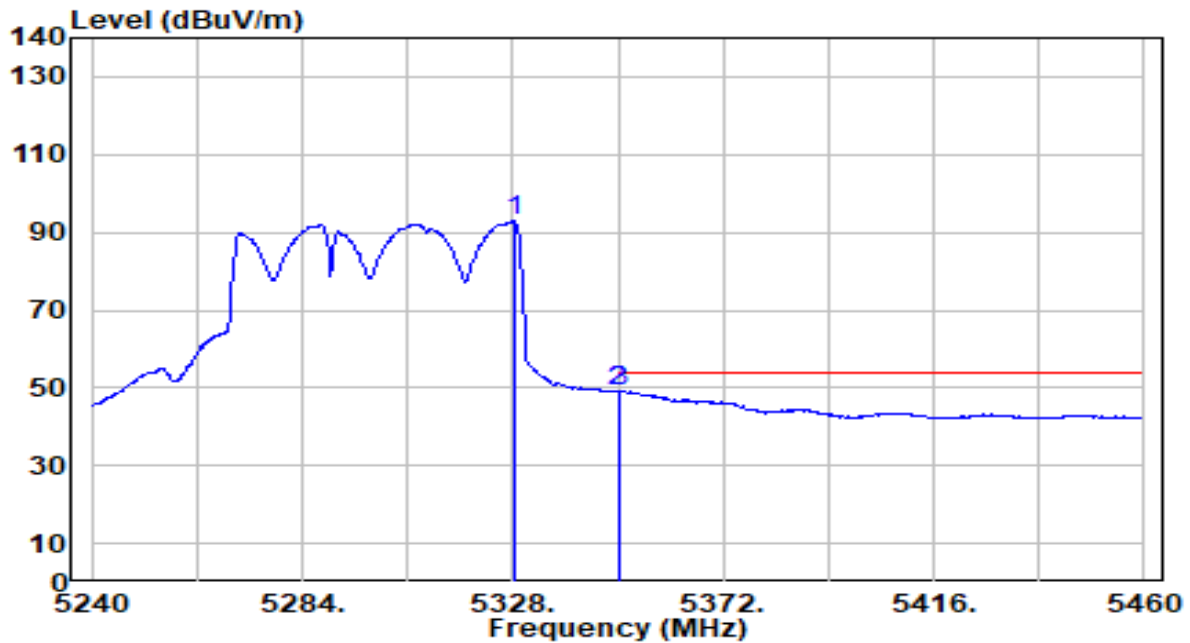


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5328.220	90.93	1.91	92.84	N/A	N/A	250	15	Average
2	5350.000	47.30	1.90	49.20	-4.80	54.00	250	15	Average
3	* 5350.440	47.45	1.90	49.35	-4.65	54.00	250	15	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-23
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-80MHz_484+242Tone_MRU1_TX_Band2_CH 58_ANT 6+7	Test Voltage	By Notebook PC

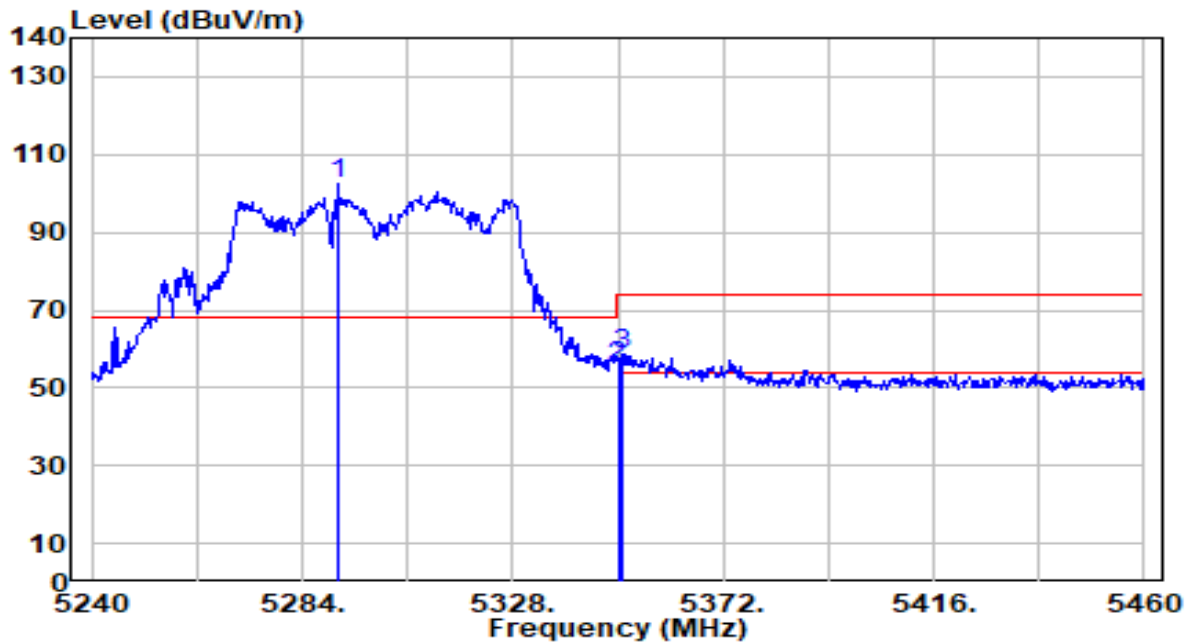


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5291.480	100.38	1.93	102.31	N/A	N/A	238	71	Peak
2	5350.000	53.52	1.90	55.43	-18.57	74.00	238	71	Peak
3	* 5350.660	56.74	1.90	58.65	-15.35	74.00	238	71	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-23
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-80MHz_484+242Tone_MRU1_TX_Band2_CH 58_ANT 6+7	Test Voltage	By Notebook PC

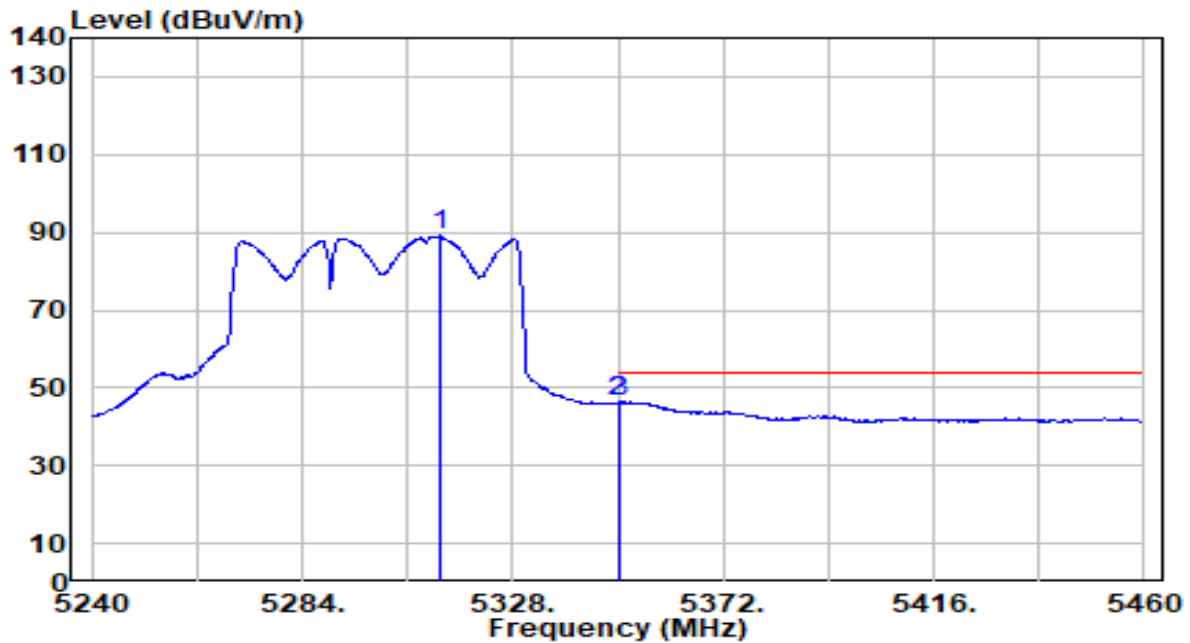


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5312.600	87.14	1.92	89.06	N/A	N/A	238	71	Average
2	5350.000	44.42	1.90	46.32	-7.68	54.00	238	71	Average
3	* 5350.440	44.58	1.90	46.48	-7.52	54.00	238	71	Average

Note:

1. " * ", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-23
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-80MHz_484+242Tone_MRU4_TX_Band3_CH 106_ANT 6+7	Test Voltage	By Notebook PC

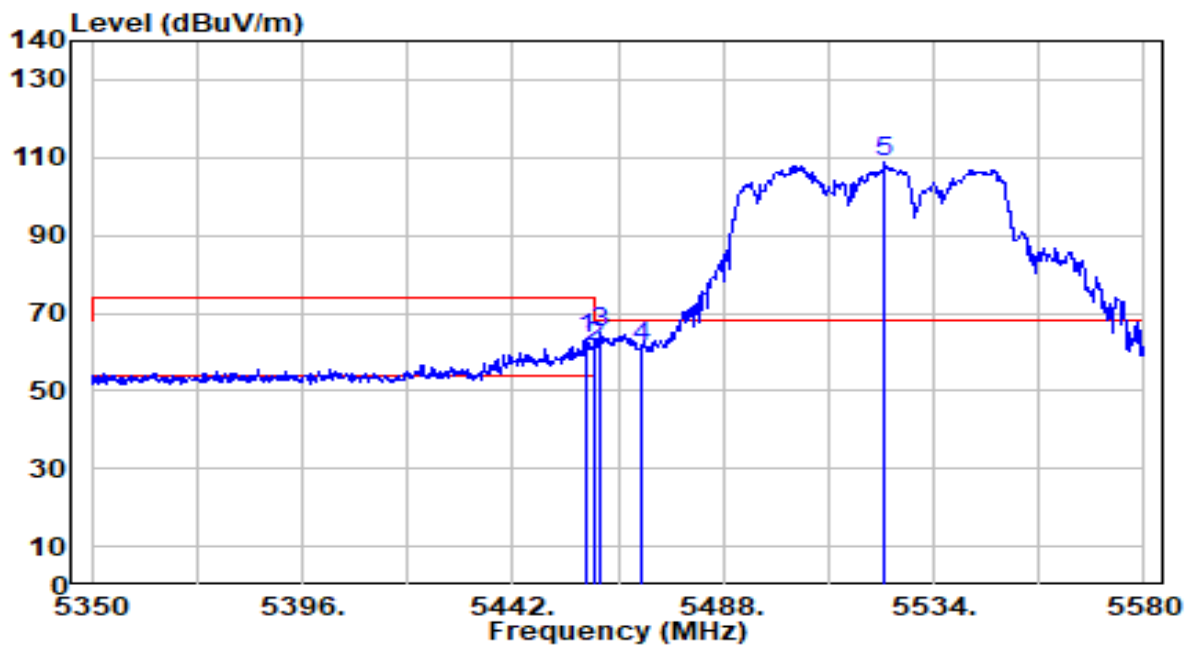


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5458.100	61.51	2.07	63.57	-10.43	74.00	228	345	Peak
2	5460.000	59.00	2.07	61.07	-12.93	74.00	228	345	Peak
3	* 5461.320	62.99	2.08	65.07	-3.13	68.20	228	345	Peak
4	5470.000	59.12	2.11	61.23	-6.97	68.20	228	345	Peak
5	5523.420	106.35	2.29	108.64	N/A	N/A	228	345	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-23
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-80MHz_484+242Tone_MRU4_TX_Band3_CH 106_ANT 6+7	Test Voltage	By Notebook PC

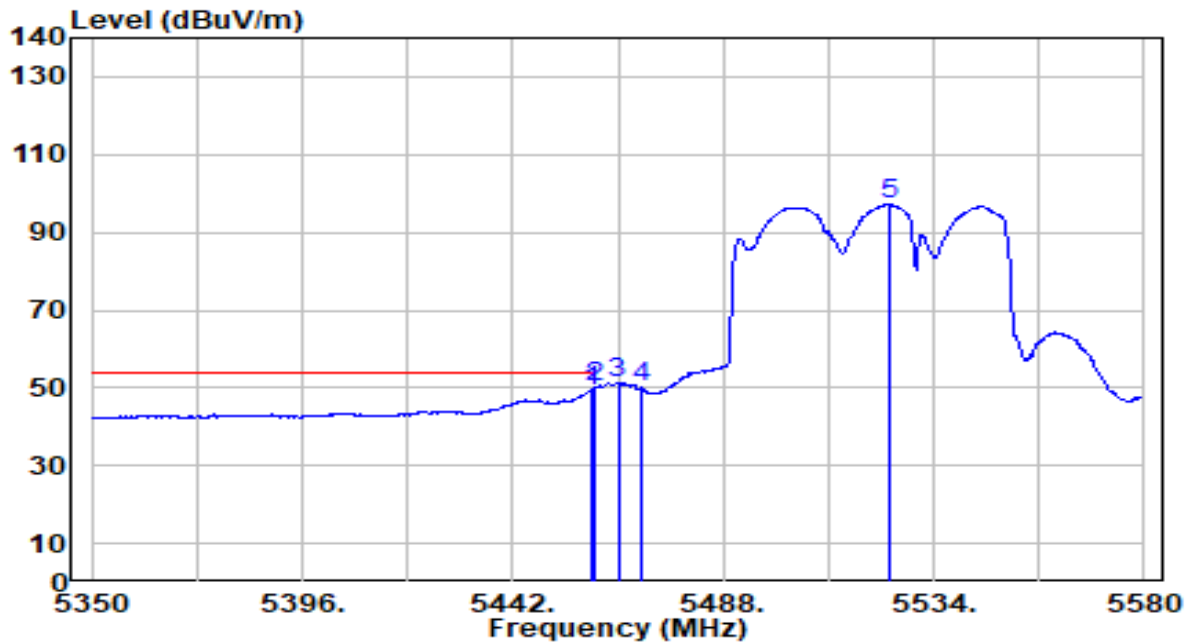


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5459.020	47.09	2.07	49.16	-4.84	54.00	228	345	Average
2	* 5460.000	47.94	2.07	50.01	-3.99	54.00	228	345	Average
3	5465.000	49.35	2.09	51.44	N/A	N/A	228	345	Average
4	5470.000	47.86	2.11	49.96	N/A	N/A	228	345	Average
5	5524.110	94.81	2.29	97.11	N/A	N/A	228	345	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-23
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-80MHz_484+242Tone_MRU4_TX_Band3_CH 106_ANT 6+7	Test Voltage	By Notebook PC

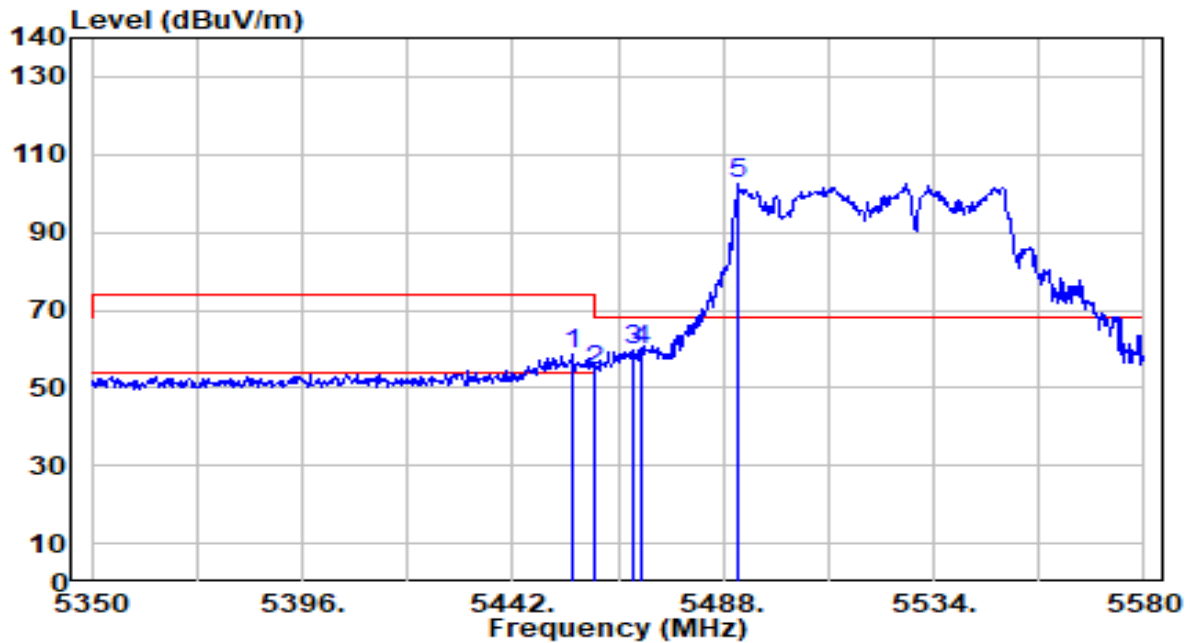


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5455.110	56.62	2.06	58.67	-15.33	74.00	211	68	Peak
2	5460.000	52.31	2.07	54.38	-19.62	74.00	211	68	Peak
3	5468.220	57.36	2.10	59.46	-8.74	68.20	211	68	Peak
4	* 5470.000	57.77	2.11	59.87	-8.33	68.20	211	68	Peak
5	5491.450	100.46	2.17	102.63	N/A	N/A	211	68	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-23
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-80MHz_484+242Tone_MRU4_TX_Band3_CH 106_ANT 6+7	Test Voltage	By Notebook PC

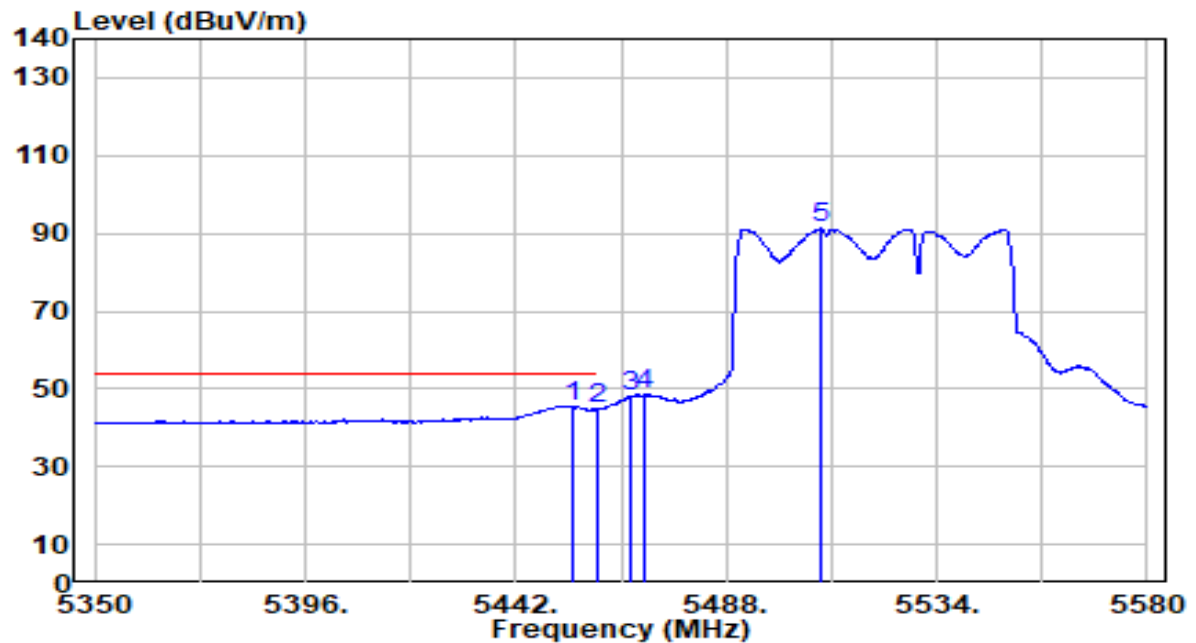


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5454.650	43.50	2.06	45.56	-8.44	54.00	211	68	Average
2		5460.000	42.69	2.07	44.76	-9.24	54.00	211	68	Average
3		5467.070	46.12	2.10	48.22	N/A	N/A	211	68	Average
4		5470.000	46.49	2.11	48.59	N/A	N/A	211	68	Average
5		5508.470	88.94	2.23	91.17	N/A	N/A	211	68	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-10
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-80MHz_484+242Tone_MRU2_TX_Band4_CH 155_ANT 6+7	Test Voltage	By Notebook PC

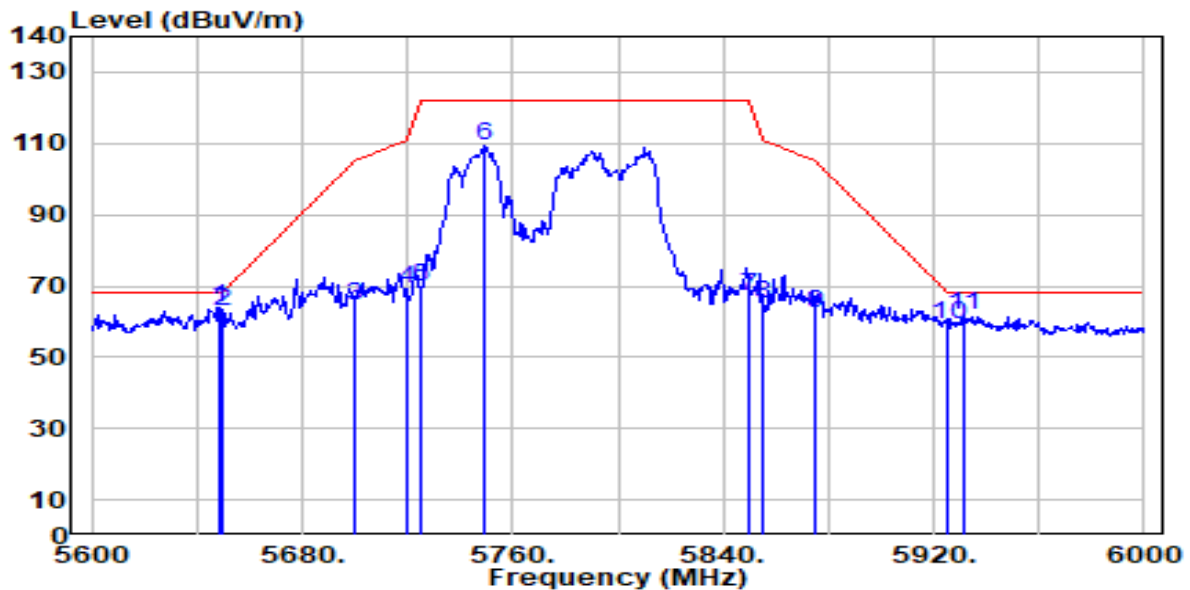


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5648.400	61.11	2.85	63.96	-4.24	68.20	235	340	Peak
2		5650.000	60.03	2.86	62.88	-5.32	68.20	235	340	Peak
3		5700.000	61.34	3.12	64.46	-40.74	105.20	235	340	Peak
4		5720.000	66.11	3.23	69.34	-41.46	110.80	235	340	Peak
5		5725.000	66.64	3.25	69.89	-52.31	122.20	235	340	Peak
6		5749.600	105.84	3.39	109.22	N/A	N/A	235	340	Peak
7		5850.000	63.38	3.63	67.00	-55.20	122.20	235	340	Peak
8		5855.000	61.52	3.63	65.14	-45.66	110.80	235	340	Peak
9		5875.000	58.81	3.61	62.43	-42.77	105.20	235	340	Peak
10		5925.000	55.81	3.59	59.40	-8.80	68.20	235	340	Peak
11		5931.200	58.18	3.59	61.77	-6.43	68.20	235	340	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-10
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-80MHz_484+242Tone_MRU2_TX_Band4_CH 155_ANT 6+7	Test Voltage	By Notebook PC

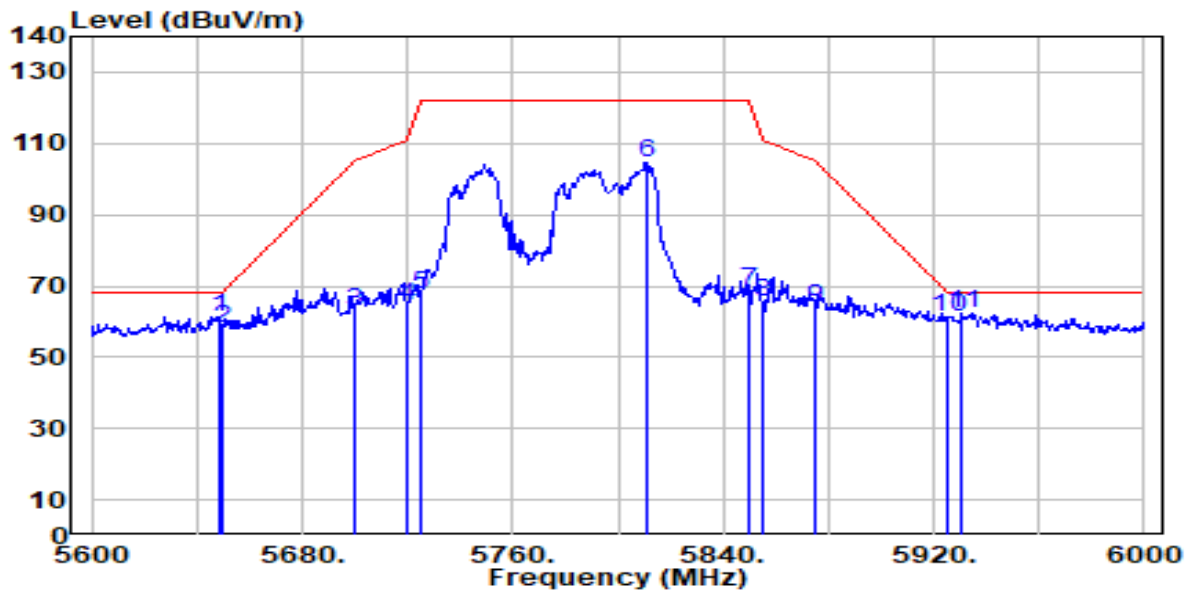


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5648.400	58.41	2.85	61.26	-6.94	68.20	137	65	Peak
2	5650.000	55.10	2.86	57.96	-10.24	68.20	137	65	Peak
3	5700.000	59.62	3.12	62.74	-42.46	105.20	137	65	Peak
4	5720.000	61.48	3.23	64.71	-46.09	110.80	137	65	Peak
5	5725.000	64.24	3.25	67.50	-54.70	122.20	137	65	Peak
6	5810.800	100.82	3.65	104.47	N/A	N/A	137	65	Peak
7	5850.000	65.07	3.63	68.70	-53.50	122.20	137	65	Peak
8	5855.000	61.70	3.63	65.32	-45.48	110.80	137	65	Peak
9	5875.000	60.40	3.61	64.01	-41.19	105.20	137	65	Peak
10	5925.000	57.49	3.59	61.08	-7.12	68.20	137	65	Peak
11	* 5930.800	58.67	3.59	62.26	-5.94	68.20	137	65	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-10
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_996+484Tone_MRJ2_TX_Band1,2_CH 50_ANT 6+7	Test Voltage	By Notebook PC

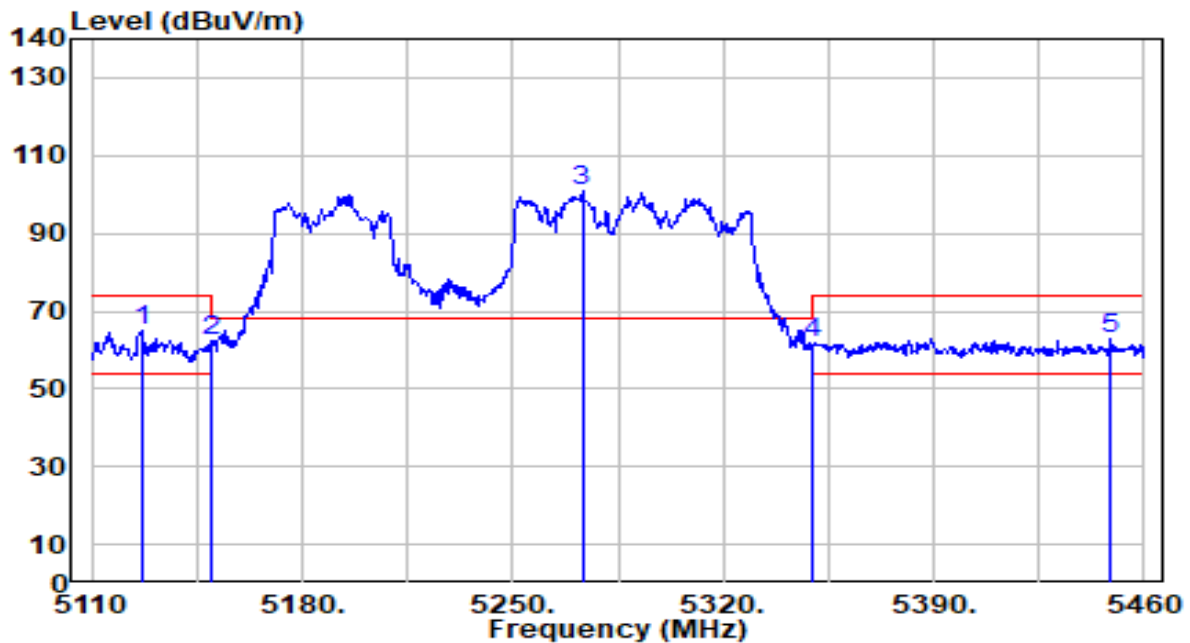


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5126.450	63.06	1.92	64.99	-9.01	74.00	191	120	Peak
2		5150.000	60.21	1.94	62.15	-11.85	74.00	191	120	Peak
3		5273.100	99.13	1.93	101.07	N/A	N/A	191	120	Peak
4		5350.000	59.68	1.90	61.58	-12.42	74.00	191	120	Peak
5		5448.800	60.64	2.04	62.68	-11.32	74.00	191	120	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-10
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_996+484Tone_MRU2_TX_Band1,2_CH 50_ANT 6+7	Test Voltage	By Notebook PC

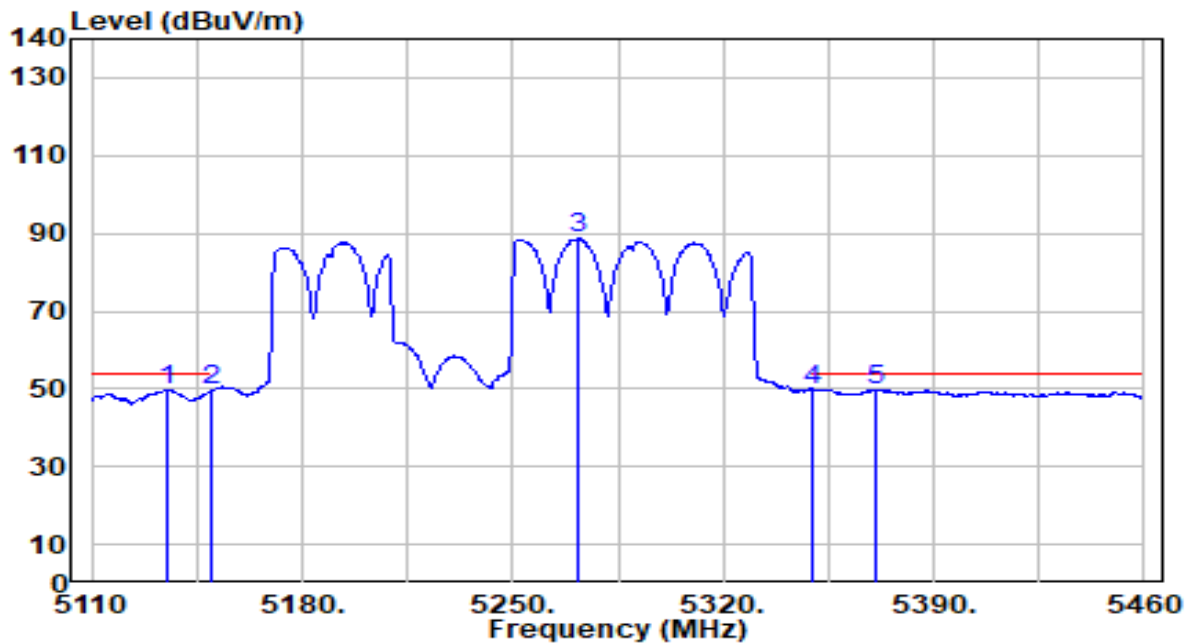


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5134.850	47.93	1.93	49.85	-4.15	54.00	191	120	Average
2	5150.000	47.71	1.94	49.64	-4.36	54.00	191	120	Average
3	5272.050	86.62	1.93	88.55	N/A	N/A	191	120	Average
4	5350.000	47.89	1.90	49.80	-4.20	54.00	191	120	Average
5	* 5370.400	48.02	1.90	49.91	-4.09	54.00	191	120	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-10
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_996+484Tone_MRU2_TX_Band1,2_CH 50_ANT 6+7	Test Voltage	By Notebook PC

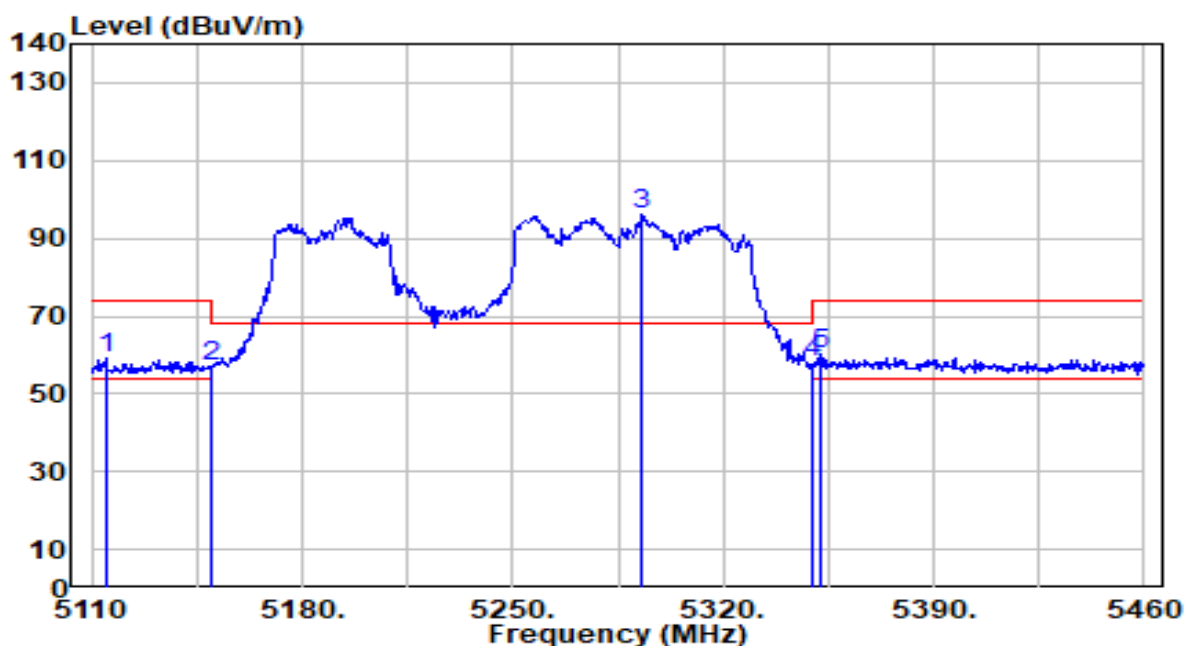


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5114.550	57.01	1.91	58.92	-15.08	74.00	176	360	Peak
2	5150.000	55.38	1.94	57.31	-16.69	74.00	176	360	Peak
3	5292.700	94.12	1.93	96.04	N/A	N/A	176	360	Peak
4	5350.000	56.16	1.90	58.06	-15.94	74.00	176	360	Peak
5	* 5352.200	58.19	1.90	60.09	-13.91	74.00	176	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-10
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_996+484Tone_MRU2_TX_Band1,2_CH 50_ANT 6+7	Test Voltage	By Notebook PC

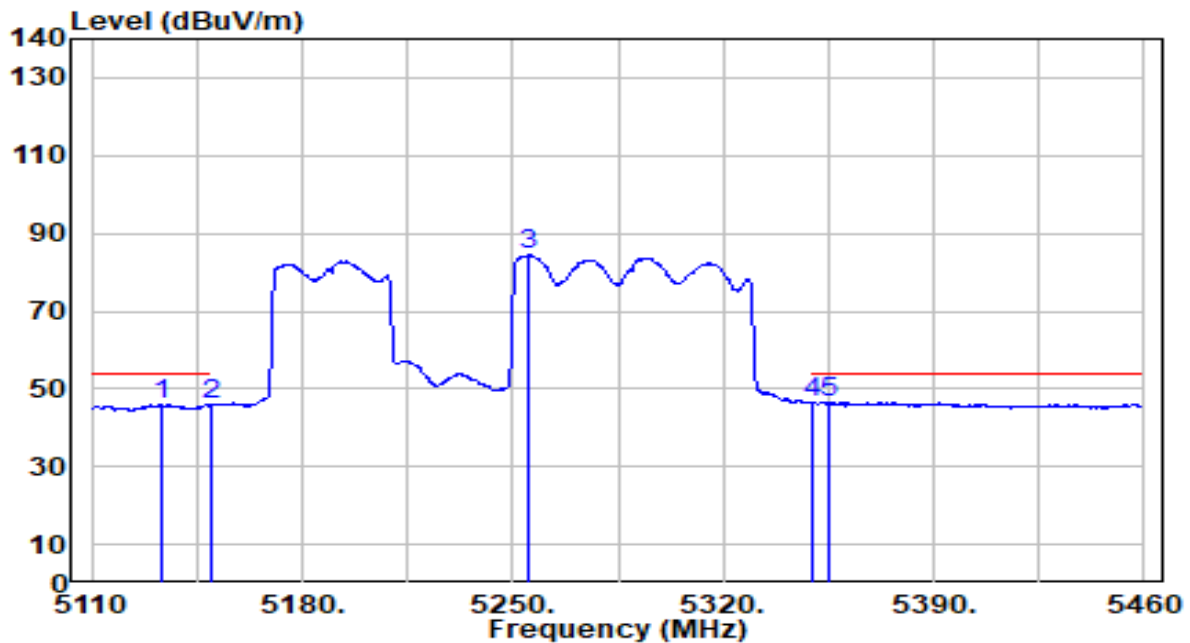


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5133.100	43.97	1.93	45.89	-8.11	54.00	176	360	Average
2	5150.000	43.99	1.94	45.93	-8.07	54.00	176	360	Average
3	5255.600	82.38	1.94	84.32	N/A	N/A	176	360	Average
4	5350.000	44.34	1.90	46.24	-7.76	54.00	176	360	Average
5	* 5355.000	44.68	1.90	46.58	-7.42	54.00	176	360	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-23
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_996+484Tone_MRU4_TX_Band3_CH114_ANT 6+7	Test Voltage	By Notebook PC

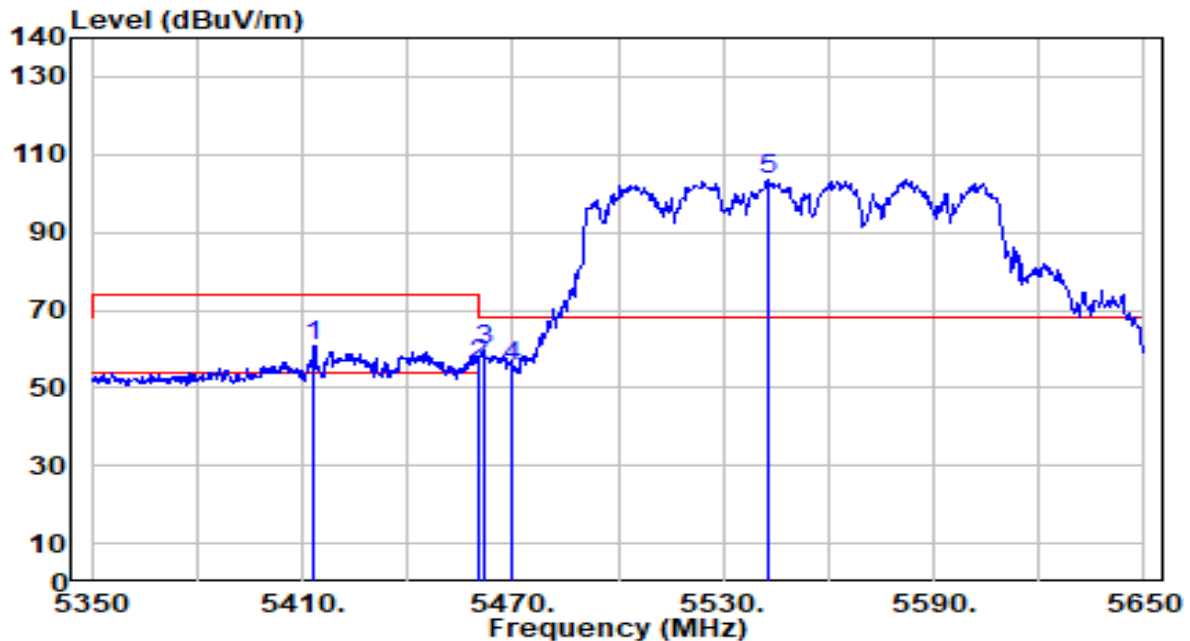


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5413.300	58.84	1.93	60.77	-13.23	74.00	195	4	Peak
2	5460.000	53.77	2.07	55.85	-18.15	74.00	195	4	Peak
3	* 5461.600	57.36	2.08	59.44	-8.76	68.20	195	4	Peak
4	5470.000	53.39	2.11	55.49	-12.71	68.20	195	4	Peak
5	5542.900	101.38	2.37	103.75	N/A	N/A	195	4	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-23
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_996+484Tone_MRU4_TX_Band3_CH 114_ANT 6+7	Test Voltage	By Notebook PC

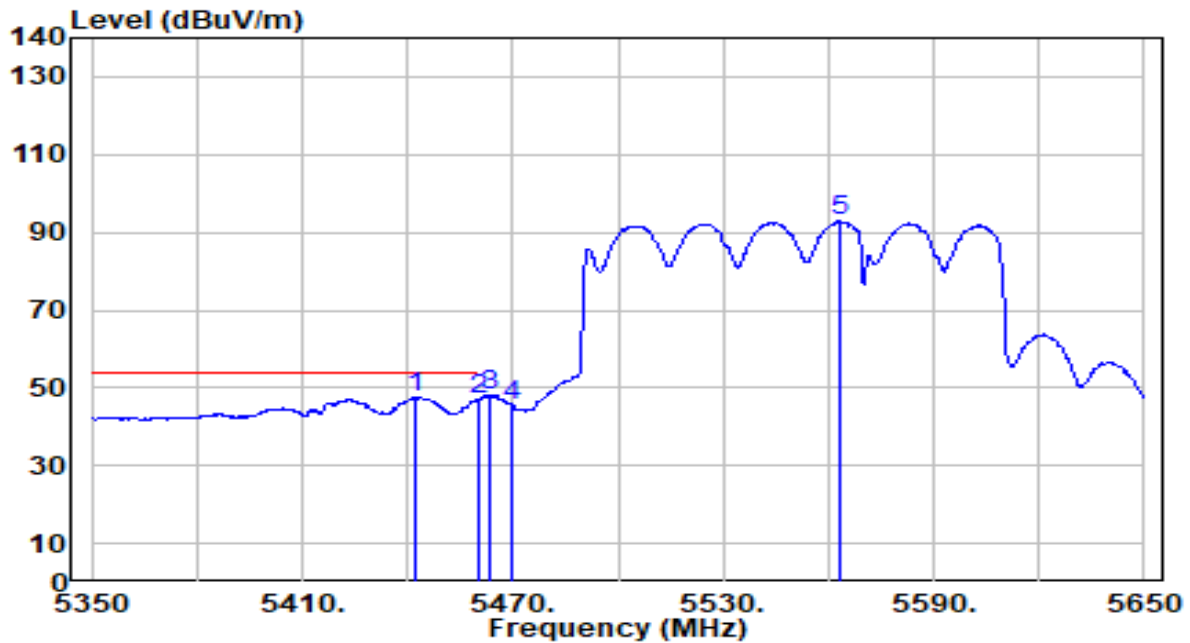


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5442.400	45.78	2.02	47.80	-6.20	54.00	195	4	Average
2		5460.000	45.11	2.07	47.19	-6.81	54.00	195	4	Average
3		5463.100	45.90	2.08	47.98	N/A	N/A	195	4	Average
4		5470.000	43.36	2.11	45.47	N/A	N/A	195	4	Average
5		5563.000	90.37	2.45	92.82	N/A	N/A	195	4	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-23
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_996+484Tone_MRU4_TX_Band3_CH114_ANT 6+7	Test Voltage	By Notebook PC

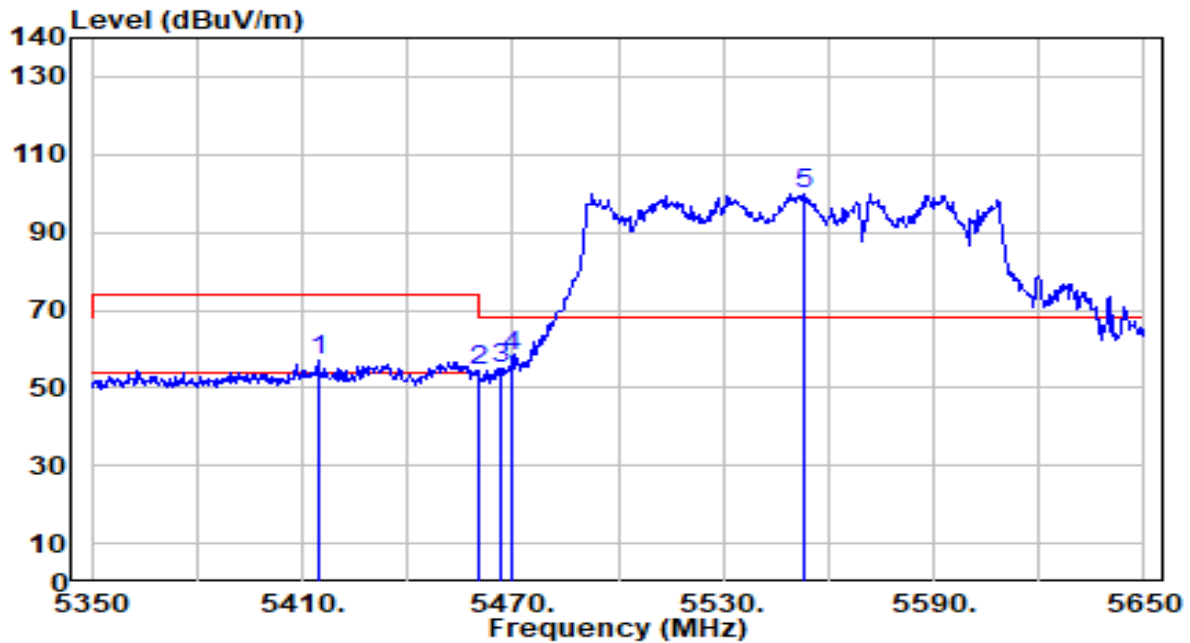


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5414.500	54.93	1.93	56.86	-17.14	74.00	235	80	Peak
2	5460.000	52.22	2.07	54.30	-19.70	74.00	235	80	Peak
3	5466.700	52.94	2.10	55.04	-13.16	68.20	235	80	Peak
4	* 5470.000	56.00	2.11	58.11	-10.09	68.20	235	80	Peak
5	5553.100	97.46	2.41	99.87	N/A	N/A	235	80	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-23
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_996+484Tone_MRU4_TX_Band3_CH 114_ANT 6+7	Test Voltage	By Notebook PC

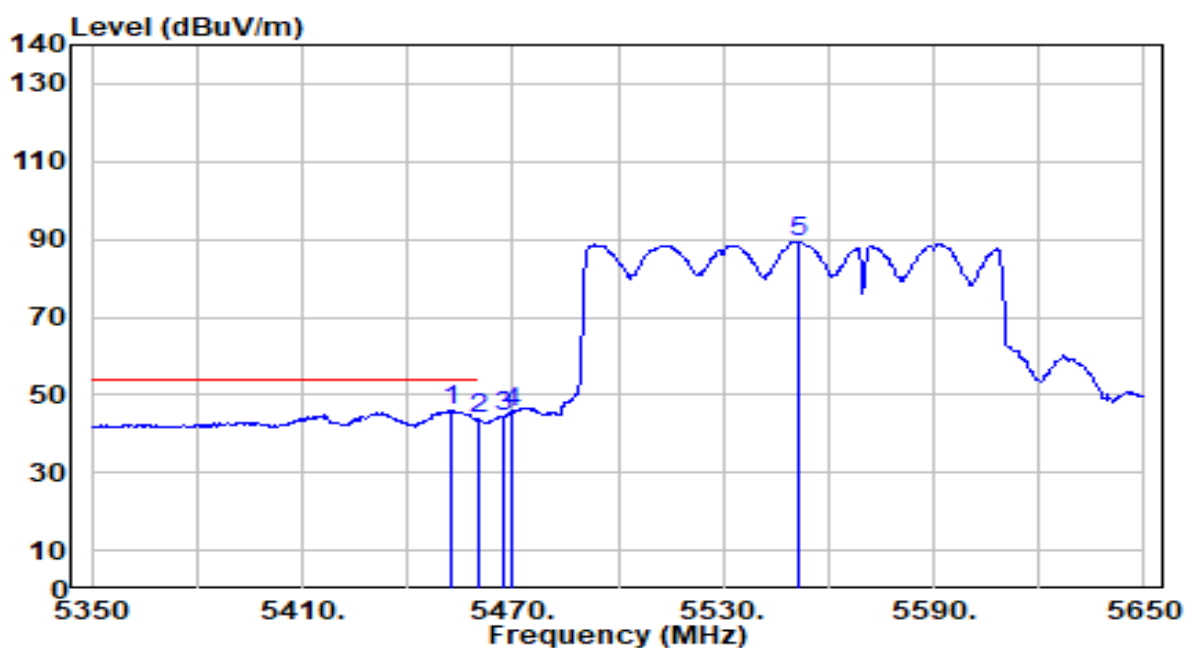


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5452.600	44.12	2.05	46.17	-7.83	54.00	235	80	Average
2		5460.000	41.54	2.07	43.61	-10.39	54.00	235	80	Average
3		5467.300	42.35	2.10	44.45	N/A	N/A	235	80	Average
4		5470.000	43.57	2.11	45.68	N/A	N/A	235	80	Average
5		5551.600	86.80	2.40	89.20	N/A	N/A	235	80	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-80MHz_484+242_PUN3_TX_Band1_CH 42_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

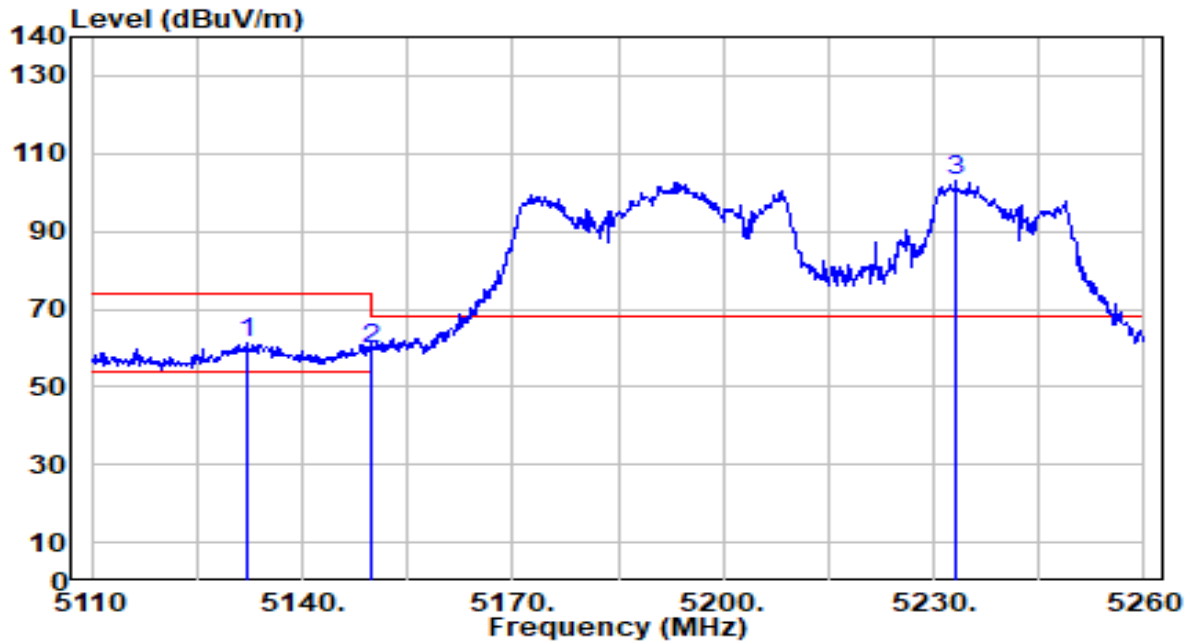


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5132.200	59.38	1.92	61.31	-12.69	74.00	214	150	Peak
2		5150.000	57.52	1.94	59.45	-14.55	74.00	214	150	Peak
3		5233.150	101.20	1.95	103.16	N/A	N/A	214	150	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-80MHz_484+242_PUN3_TX_Band1_CH 42_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

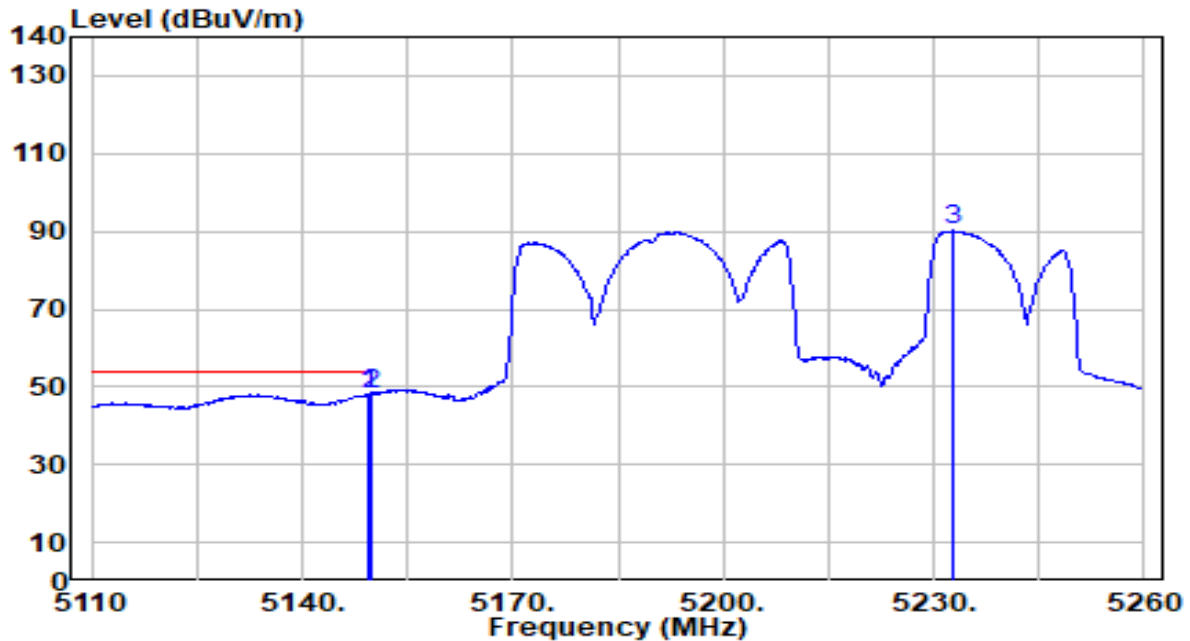


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5149.450	46.19	1.94	48.13	-5.87	54.00	214	150	Average
2	*	5150.000	46.37	1.94	48.30	-5.70	54.00	214	150	Average
3		5232.850	88.16	1.95	90.11	N/A	N/A	214	150	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-80MHz_484+242_PUN3_TX_Band1_CH 42_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

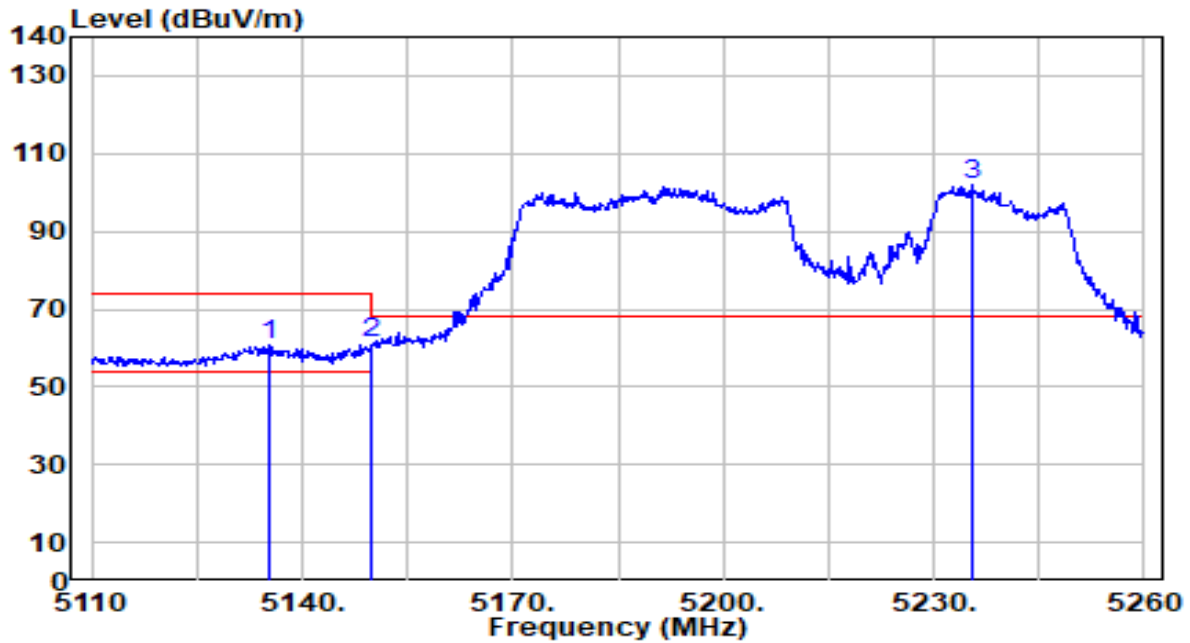


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5135.350	58.95	1.93	60.88	-13.12	74.00	263	55	Peak
2	*	5150.000	59.09	1.94	61.03	-12.97	74.00	263	55	Peak
3		5235.400	99.90	1.95	101.85	N/A	N/A	263	55	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-80MHz_484+242_PUN3_TX_Band1_CH 42_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

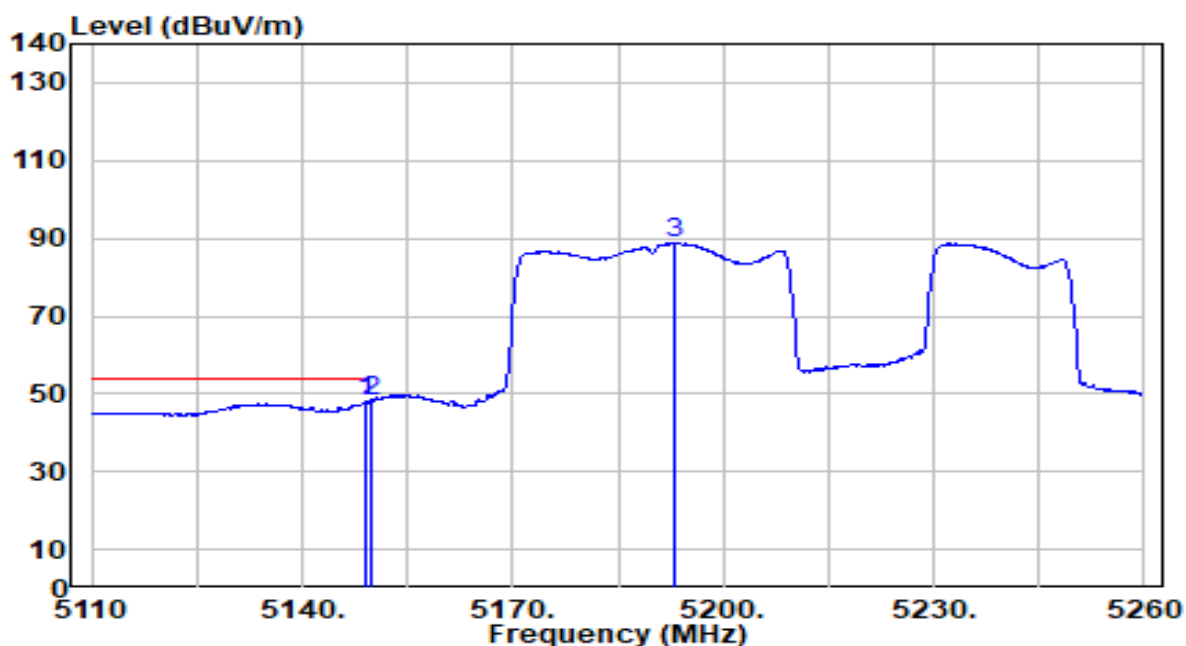


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.000	46.33	1.94	48.27	-5.73	54.00	263	55	Average
2		5150.000	46.30	1.94	48.24	-5.76	54.00	263	55	Average
3		5192.950	86.73	1.96	88.69	N/A	N/A	263	55	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-80MHz_484+242_PUN2_TX_Band2_CH 58_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

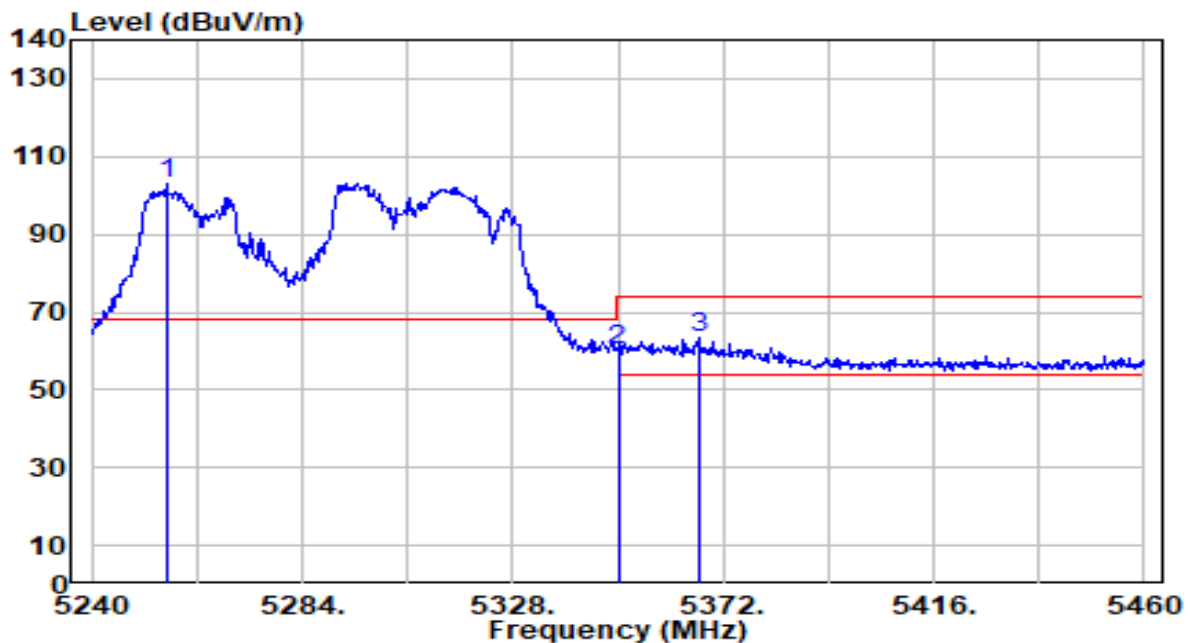


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5255.620	101.23	1.94	103.18	N/A	N/A	248	109	Peak
2	5350.000	58.17	1.90	60.07	-13.93	74.00	248	109	Peak
3	* 5366.940	61.35	1.90	63.25	-10.75	74.00	248	109	Peak

Note:

1. " * ", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-80MHz_484+242_PUN2_TX_Band2_CH 58_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

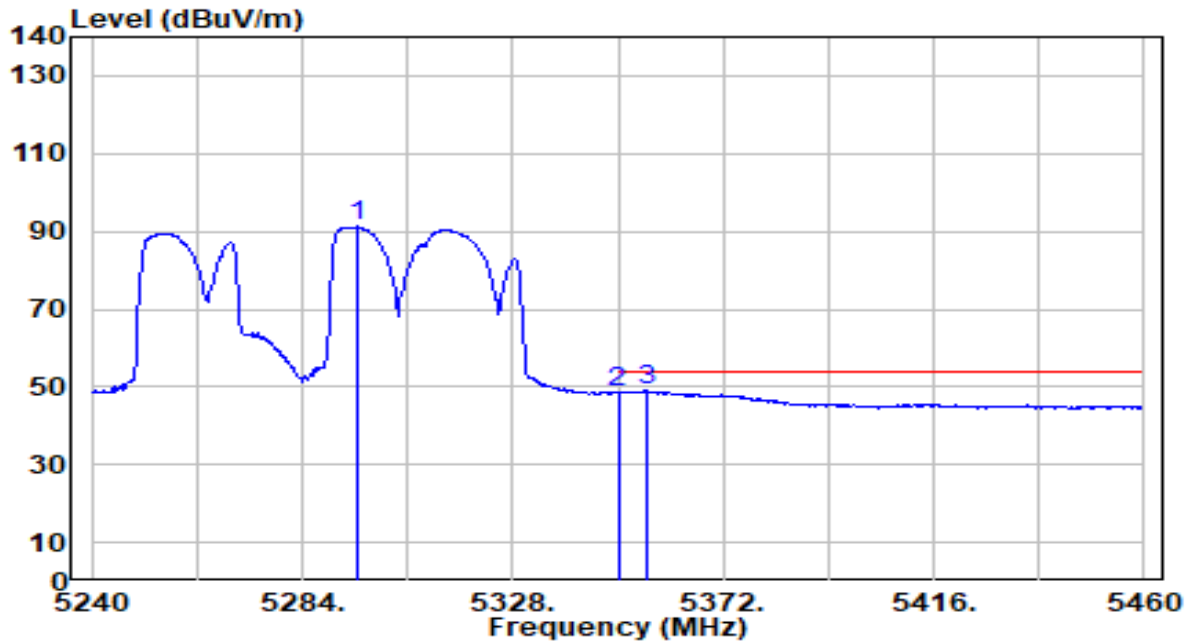


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5295.440	89.25	1.92	91.17	N/A	N/A	248	109	Average
2	5350.000	46.63	1.90	48.53	-5.47	54.00	248	109	Average
3	* 5355.940	47.13	1.90	49.04	-4.96	54.00	248	109	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-80MHz_484+242_PUN2_TX_Band2_CH 58_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

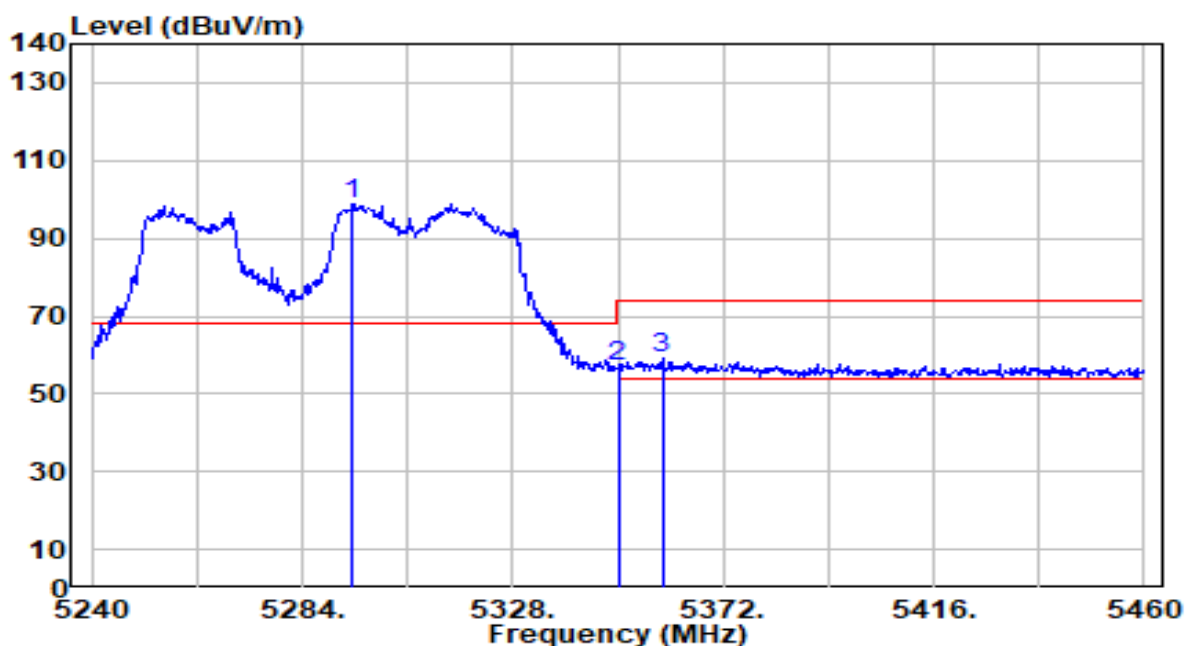


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5294.340	97.02	1.92	98.94	N/A	N/A	171	356	Peak
2	5350.000	55.14	1.90	57.05	-16.95	74.00	171	356	Peak
3	* 5359.240	57.50	1.90	59.40	-14.60	74.00	171	356	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-80MHz_484+242_PUN2_TX_Band2_CH 58_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

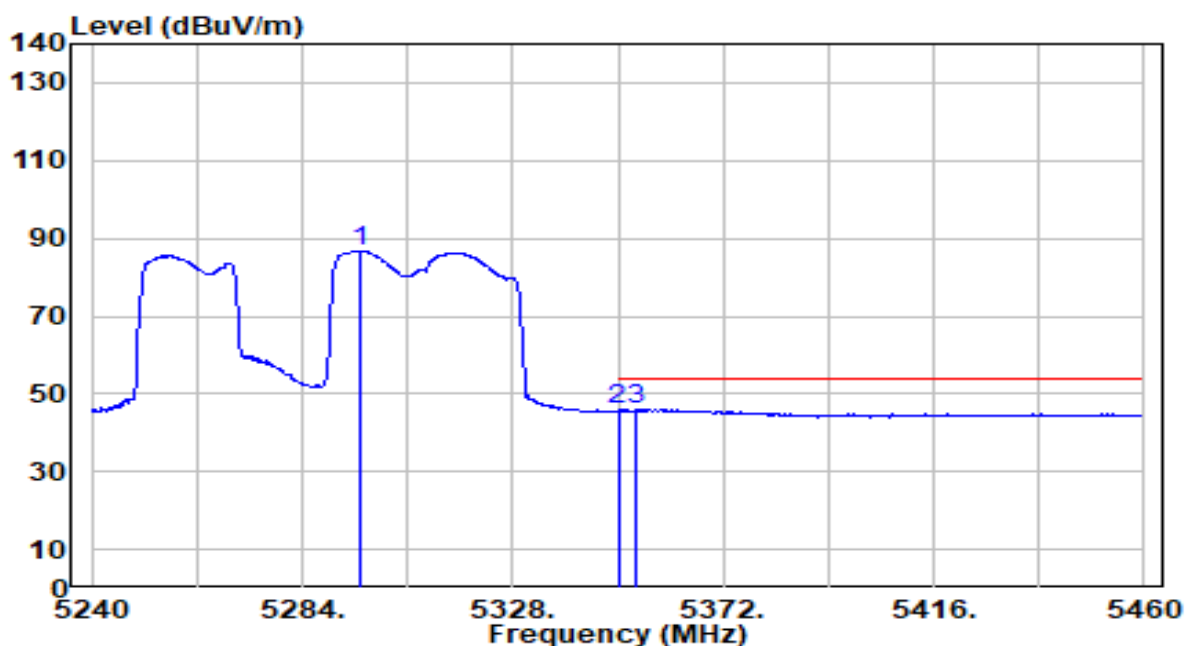


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5296.320	84.88	1.92	86.80	N/A	N/A	171	356	Average
2	5350.000	43.93	1.90	45.83	-8.17	54.00	171	356	Average
3	* 5353.740	44.19	1.90	46.10	-7.90	54.00	171	356	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-80MHz_484+242_PUN3_TX_Band3_CH 106_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

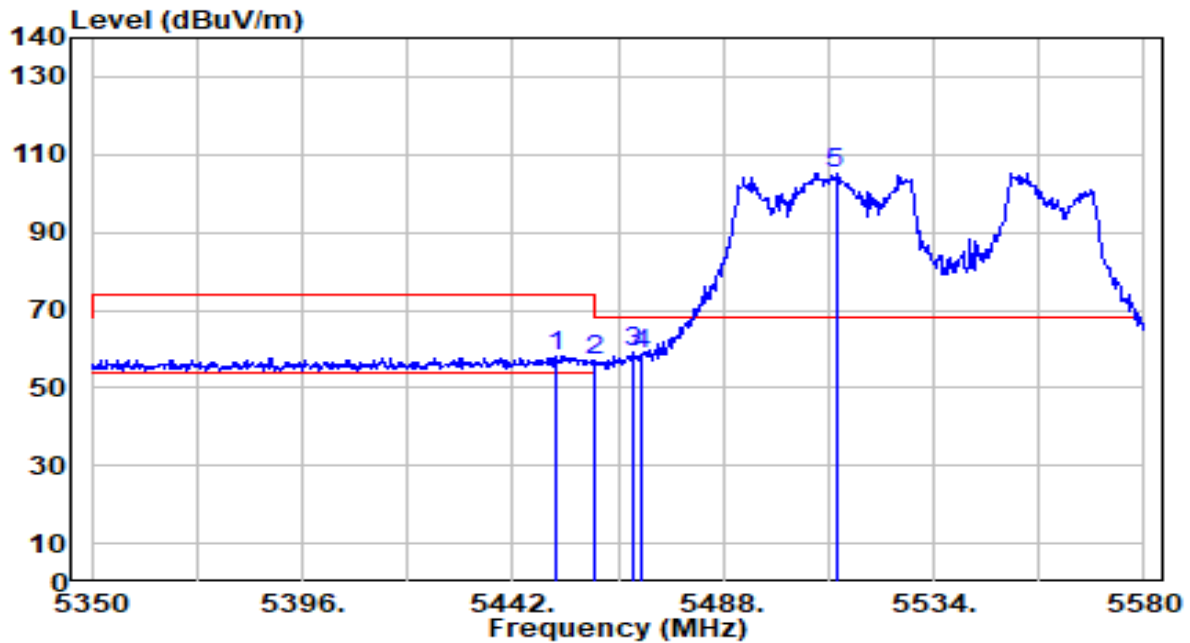


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5451.660	56.19	2.05	58.24	-15.76	74.00	205	48	Peak
2	5460.000	54.99	2.07	57.07	-16.93	74.00	205	48	Peak
3	* 5468.220	57.18	2.10	59.29	-8.91	68.20	205	48	Peak
4	5470.000	56.40	2.11	58.50	-9.70	68.20	205	48	Peak
5	5512.610	103.05	2.25	105.30	N/A	N/A	205	48	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-80MHz_484+242_PUN3_TX_Band3_CH 106_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

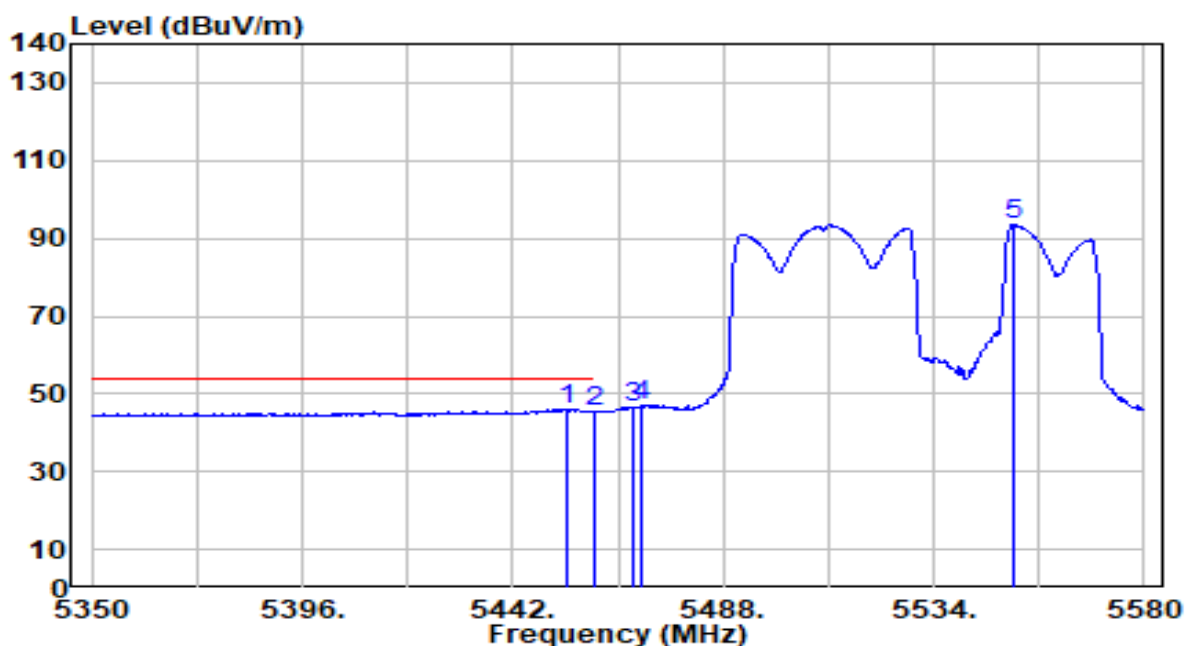


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5453.960	44.04	2.06	46.10	-7.90	54.00	205	48	Average
2		5460.000	43.23	2.07	45.30	-8.70	54.00	205	48	Average
3		5468.220	44.63	2.10	46.73	N/A	N/A	205	48	Average
4		5470.000	44.67	2.11	46.78	N/A	N/A	205	48	Average
5		5551.480	91.03	2.40	93.43	N/A	N/A	205	48	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-80MHz_484+242_PUN3_TX_Band3_CH 106_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

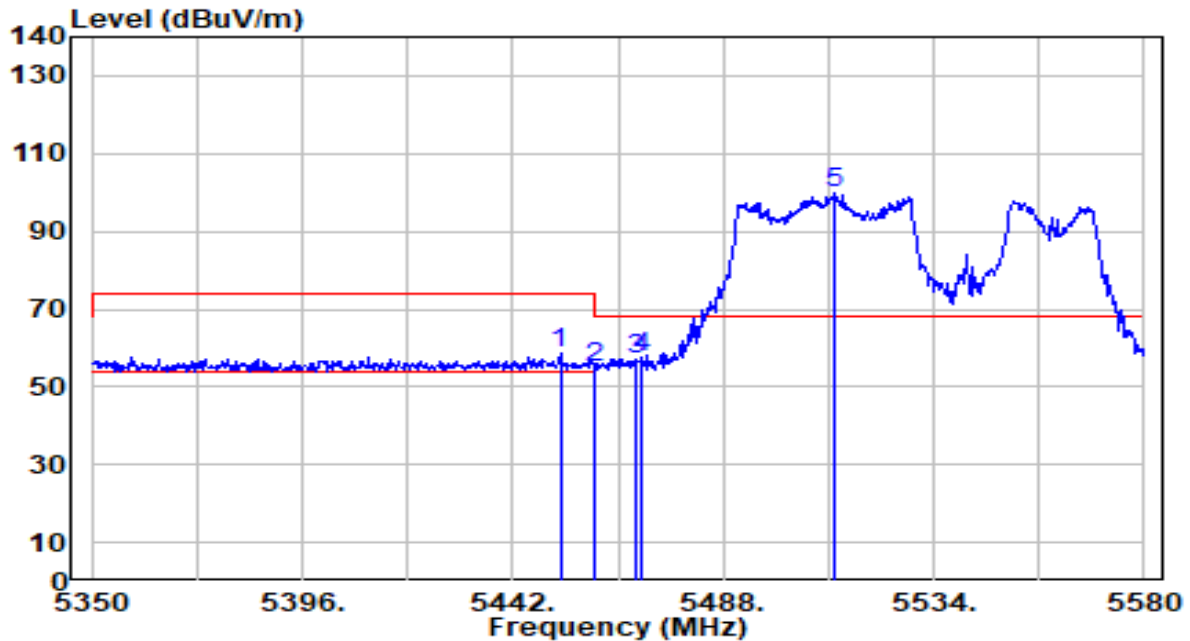


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5452.350	56.62	2.05	58.67	-15.33	74.00	226	81	Peak
2	5460.000	52.85	2.07	54.92	-19.08	74.00	226	81	Peak
3	5468.680	54.93	2.10	57.03	-11.17	68.20	226	81	Peak
4	* 5470.000	55.50	2.11	57.61	-10.59	68.20	226	81	Peak
5	5512.150	97.54	2.25	99.79	N/A	N/A	226	81	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-80MHz_484+242_PUN3_TX_Band3_CH 106_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

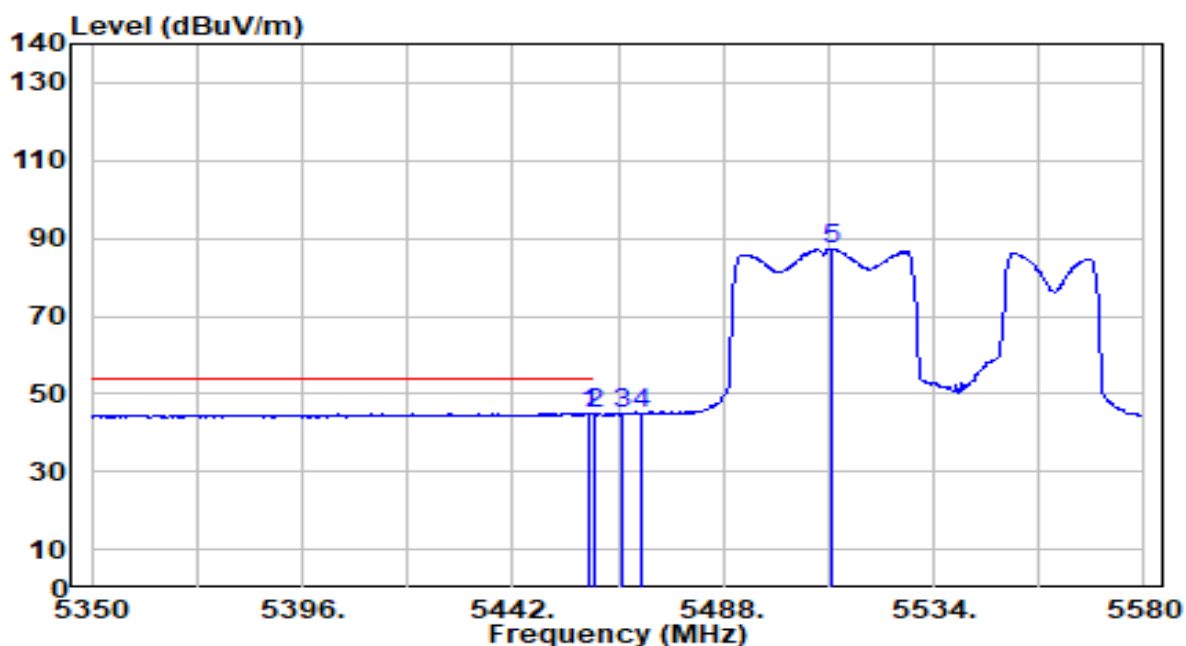


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5458.790	43.09	2.07	45.16	-8.84	54.00	226	81	Average
2		5460.000	42.60	2.07	44.68	-9.32	54.00	226	81	Average
3		5466.150	42.95	2.09	45.04	N/A	N/A	226	81	Average
4		5470.000	42.80	2.11	44.91	N/A	N/A	226	81	Average
5		5511.920	85.06	2.25	87.30	N/A	N/A	226	81	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-80MHz_484+242_PUN3_TX_Band4_CH 155_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

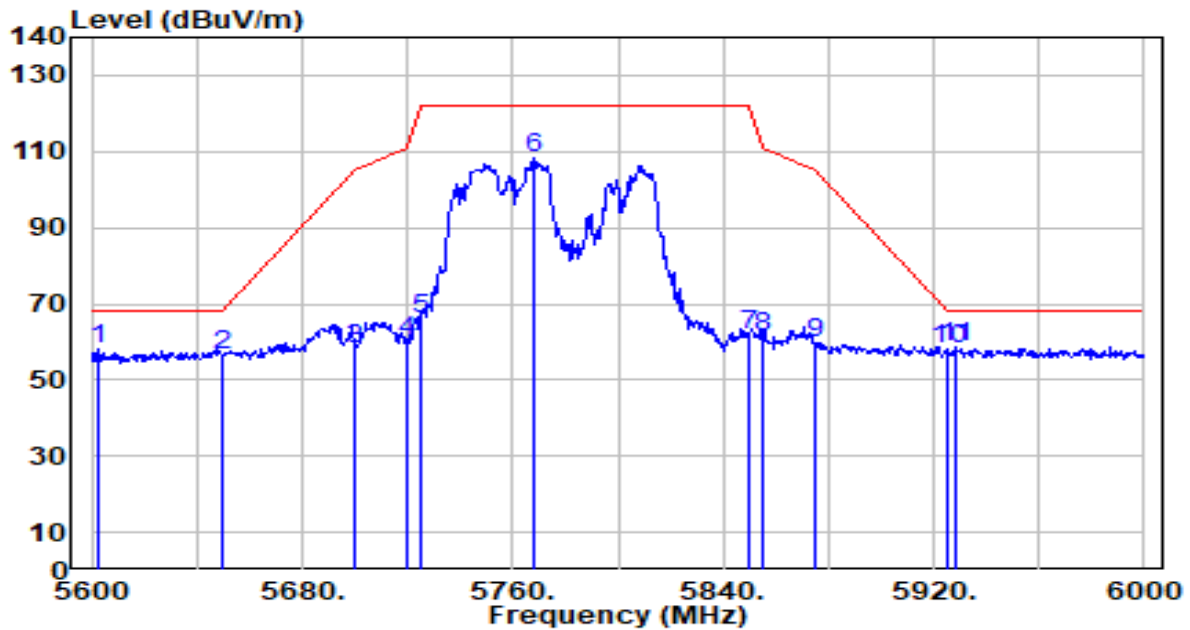


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5602.400	55.48	2.61	58.09	-10.11	68.20	218	316	Peak
2	5650.000	53.57	2.86	56.43	-11.77	68.20	218	316	Peak
3	5700.000	54.89	3.12	58.00	-47.20	105.20	218	316	Peak
4	5720.000	56.98	3.23	60.21	-50.59	110.80	218	316	Peak
5	5725.000	62.80	3.25	66.06	-56.14	122.20	218	316	Peak
6	5768.400	104.63	3.49	108.12	N/A	N/A	218	316	Peak
7	5850.000	58.15	3.63	61.78	-60.42	122.20	218	316	Peak
8	5855.000	57.51	3.63	61.14	-49.66	110.80	218	316	Peak
9	5875.000	56.08	3.61	59.69	-45.51	105.20	218	316	Peak
10	5925.000	54.62	3.59	58.21	-9.99	68.20	218	316	Peak
11	* 5928.400	55.14	3.59	58.73	-9.47	68.20	218	316	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-80MHz_484+242_PUN3_TX_Band4_CH 155_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

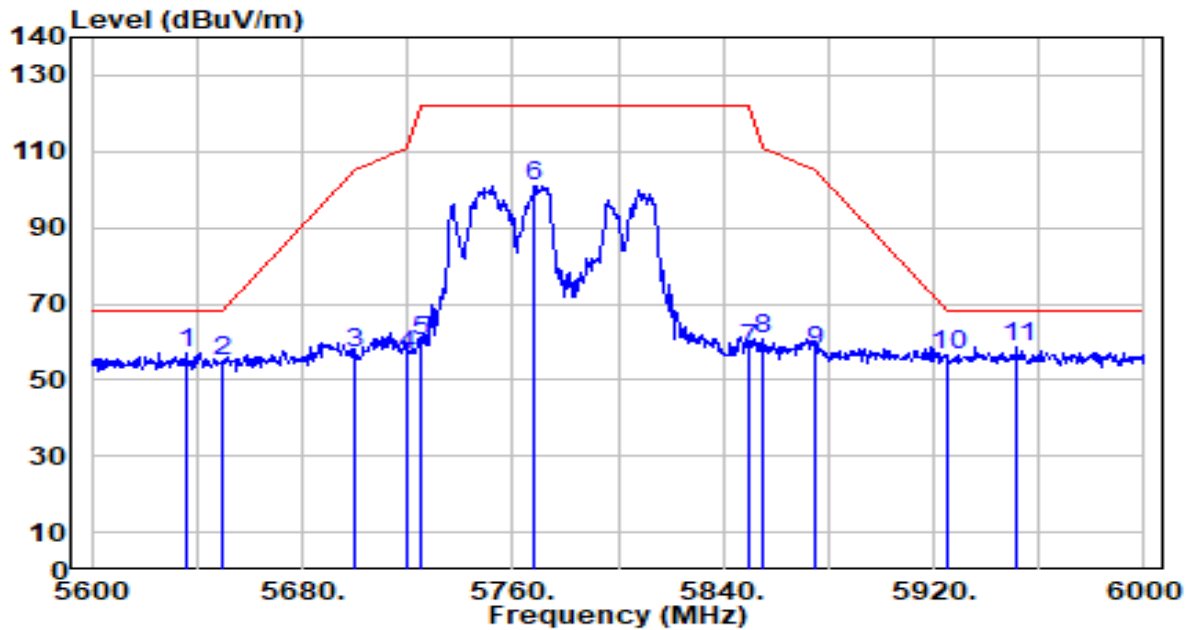


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5636.000	54.49	2.78	57.28	-10.92	68.20	168	63	Peak
2	5650.000	52.14	2.86	55.00	-13.20	68.20	168	63	Peak
3	5700.000	53.74	3.12	56.86	-48.34	105.20	168	63	Peak
4	5720.000	53.48	3.23	56.70	-54.10	110.80	168	63	Peak
5	5725.000	56.96	3.25	60.22	-61.98	122.20	168	63	Peak
6	5768.000	97.68	3.49	101.17	N/A	N/A	168	63	Peak
7	5850.000	54.33	3.63	57.96	-64.24	122.20	168	63	Peak
8	5855.000	57.20	3.63	60.82	-49.98	110.80	168	63	Peak
9	5875.000	54.07	3.61	57.69	-47.51	105.20	168	63	Peak
10	5925.000	52.77	3.59	56.37	-11.83	68.20	168	63	Peak
11	* 5951.600	55.07	3.59	58.66	-9.54	68.20	168	63	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_996+484_40_PUN3_TX_Band1,2_CH 50_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

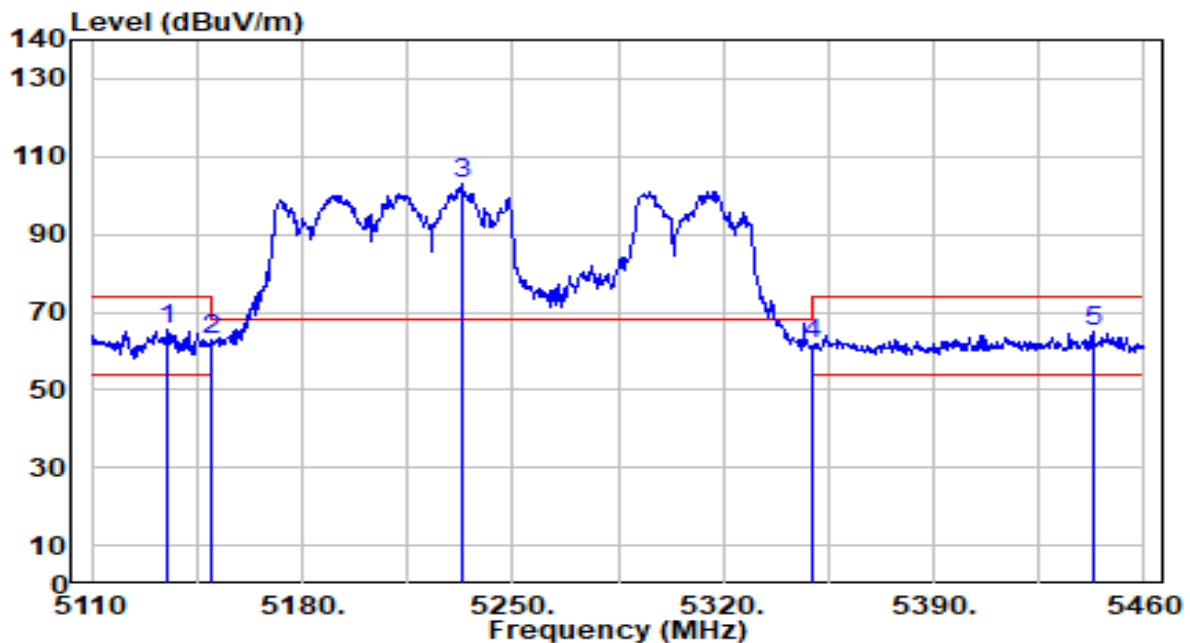


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5134.850	63.33	1.93	65.26	-8.74	74.00	215	136	Peak
2		5150.000	60.82	1.94	62.76	-11.24	74.00	215	136	Peak
3		5233.550	100.90	1.95	102.85	N/A	N/A	215	136	Peak
4		5350.000	59.79	1.90	61.69	-12.31	74.00	215	136	Peak
5		5443.200	62.84	2.02	64.86	-9.14	74.00	215	136	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_996+484_40_PUN3_TX_Band1,2_CH 50_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

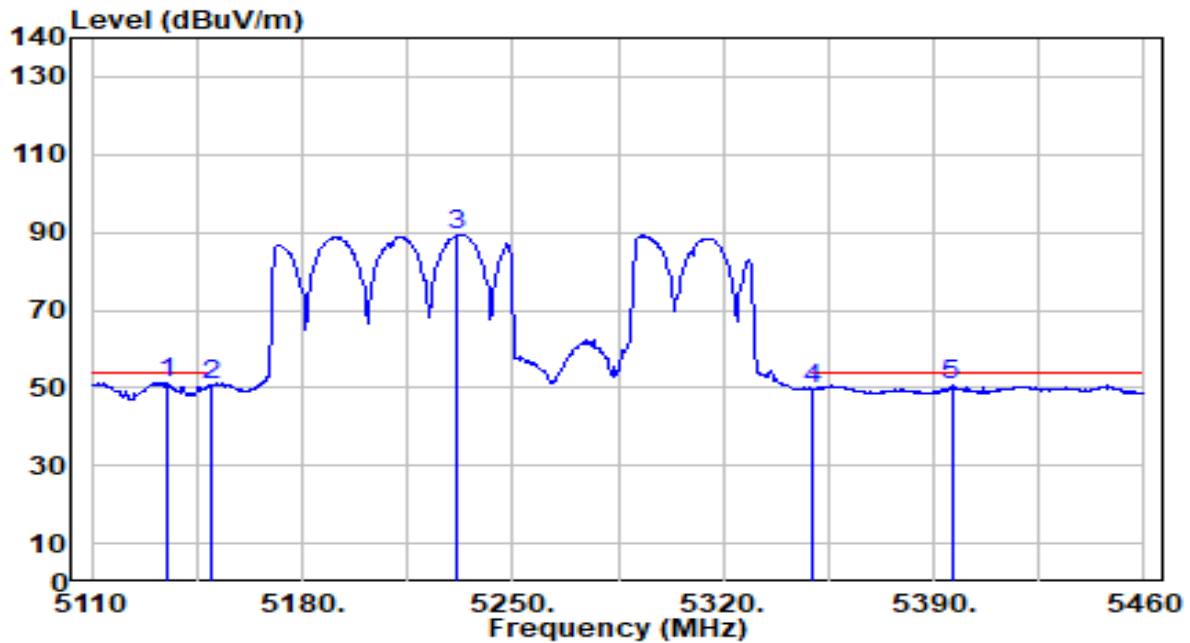


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5134.850	49.28	1.93	51.20	-2.80	54.00	215	136	Average
2		5150.000	48.87	1.94	50.81	-3.19	54.00	215	136	Average
3		5231.450	87.53	1.95	89.48	N/A	N/A	215	136	Average
4		5350.000	47.84	1.90	49.74	-4.26	54.00	215	136	Average
5		5395.950	48.77	1.89	50.66	-3.34	54.00	215	136	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_996+484_40_PUN3_TX_Band1,2_CH 50_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

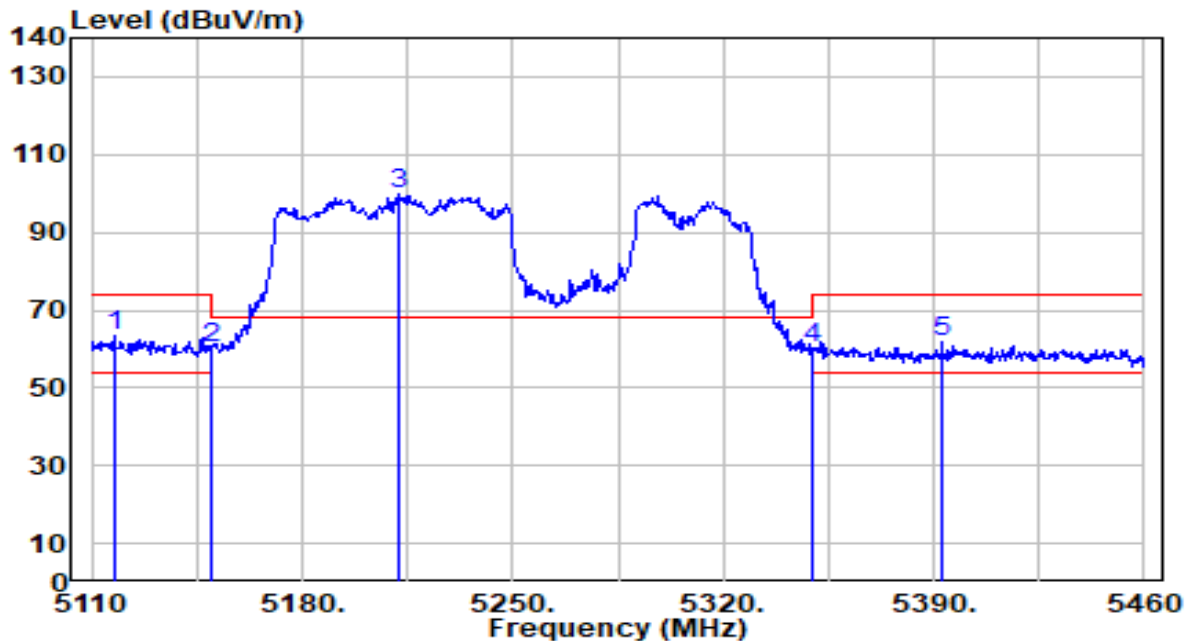


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5117.350	61.69	1.92	63.60	-10.40	74.00	285	55	Peak
2		5150.000	58.31	1.94	60.25	-13.75	74.00	285	55	Peak
3		5212.200	97.99	1.96	99.95	N/A	N/A	285	55	Peak
4		5350.000	58.35	1.90	60.26	-13.74	74.00	285	55	Peak
5		5392.800	59.75	1.89	61.64	-12.36	74.00	285	55	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_996+484_40_PUN3_TX_Band1,2_CH 50_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

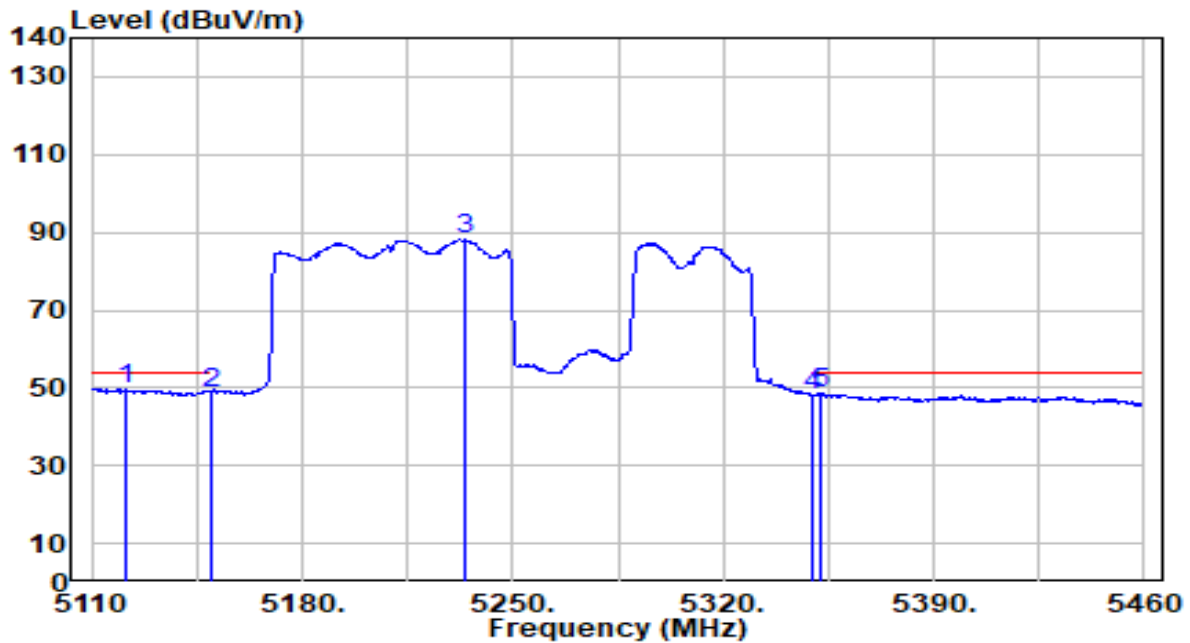


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5121.550	47.91	1.92	49.83	-4.17	54.00	285	55	Average
2		5150.000	46.71	1.94	48.64	-5.36	54.00	285	55	Average
3		5234.250	86.04	1.95	87.99	N/A	N/A	285	55	Average
4		5350.000	46.24	1.90	48.14	-5.86	54.00	285	55	Average
5		5352.200	46.57	1.90	48.48	-5.52	54.00	285	55	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_996+484+242_20_PUN2_TX_Band1,2_CH 50_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

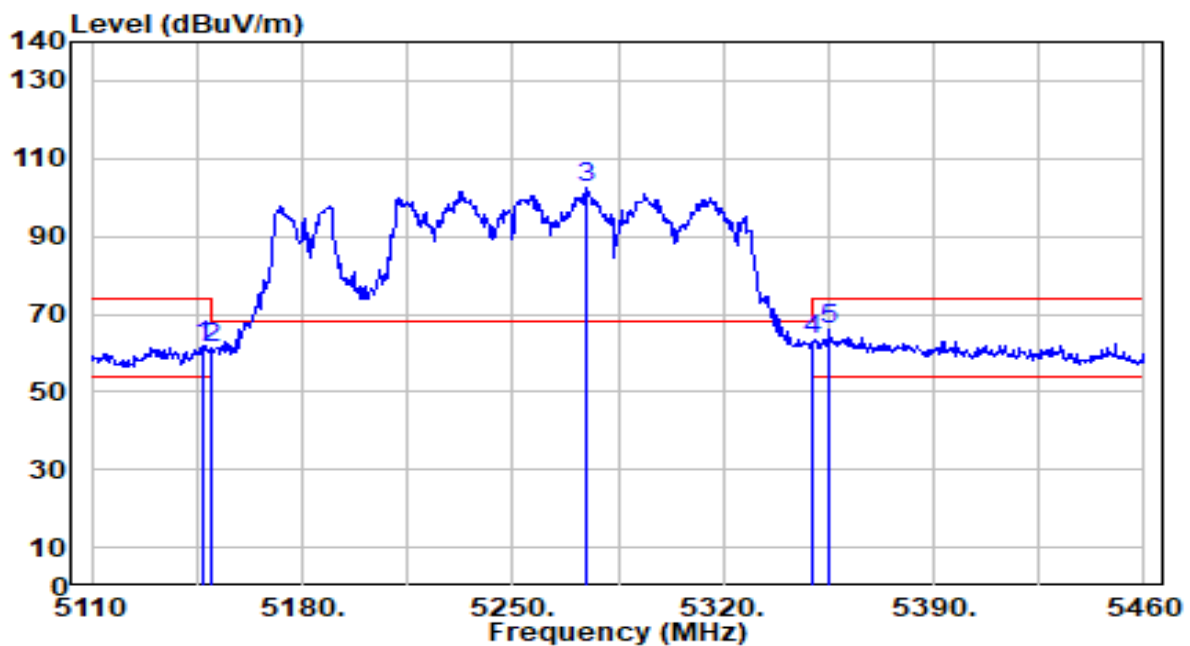


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5147.450	59.90	1.93	61.83	-12.17	74.00	215	136	Peak
2	5150.000	59.31	1.94	61.25	-12.75	74.00	215	136	Peak
3	5274.150	100.51	1.93	102.45	N/A	N/A	215	136	Peak
4	5350.000	61.35	1.90	63.26	-10.74	74.00	215	136	Peak
5	* 5355.350	64.09	1.90	65.99	-8.01	74.00	215	136	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_996+484+242_20_PUN2_TX_Band1,2_CH 50_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

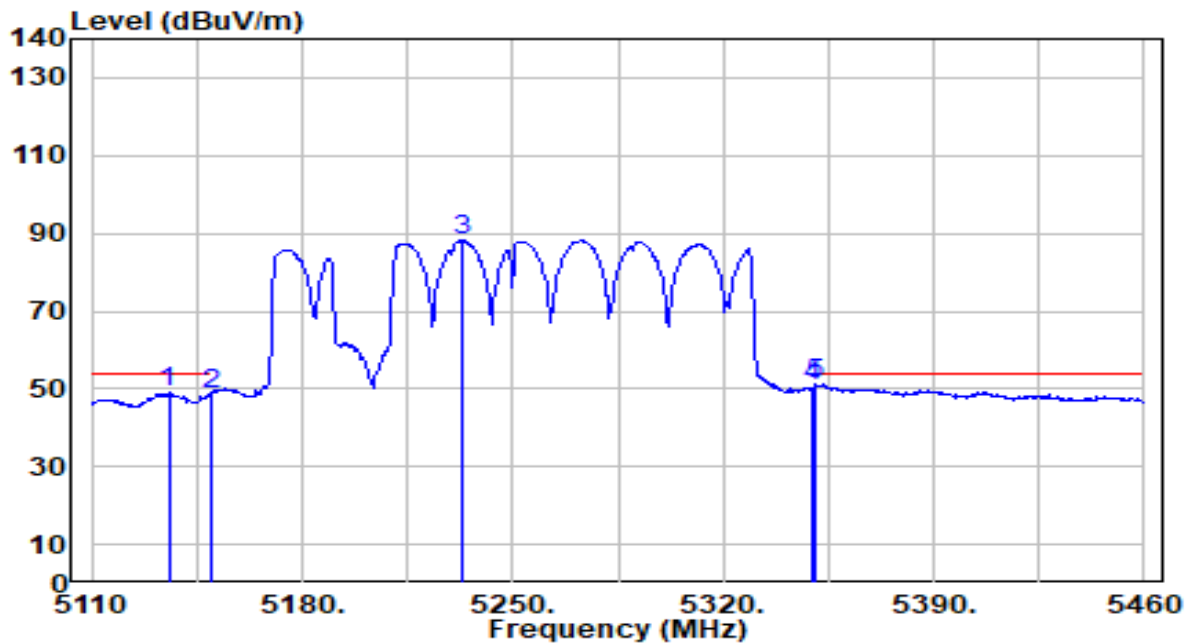


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5135.550	47.02	1.93	48.95	-5.05	54.00	215	136	Average
2	5150.000	46.78	1.94	48.72	-5.28	54.00	215	136	Average
3	5233.200	86.27	1.95	88.23	N/A	N/A	215	136	Average
4	5350.000	48.66	1.90	50.56	-3.44	54.00	215	136	Average
5	* 5350.800	49.23	1.90	51.13	-2.87	54.00	215	136	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_996+484+242_20_PUN2_TX_Band1,2_CH 50_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

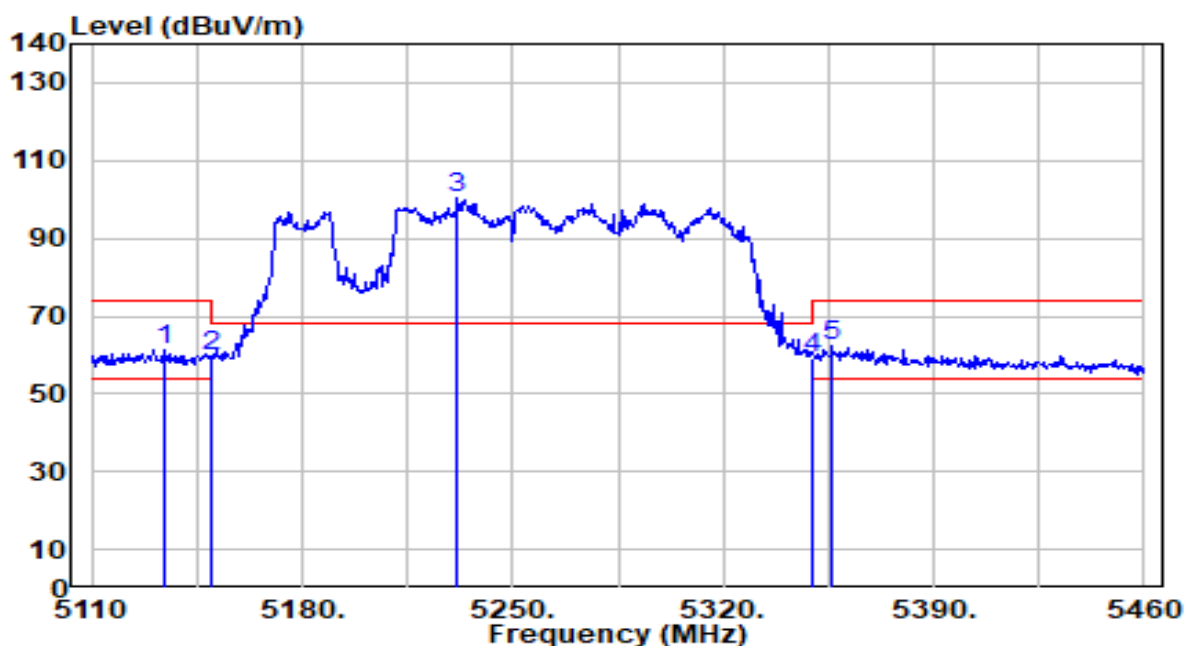


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5134.500	59.51	1.93	61.44	-12.56	74.00	285	55	Peak
2	5150.000	57.88	1.94	59.82	-14.18	74.00	285	55	Peak
3	5231.800	98.17	1.95	100.12	N/A	N/A	285	55	Peak
4	5350.000	57.48	1.90	59.38	-14.62	74.00	285	55	Peak
5	* 5356.400	60.51	1.90	62.41	-11.59	74.00	285	55	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_996+484+242_20_PUN2_TX_Band1,2_CH 50_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

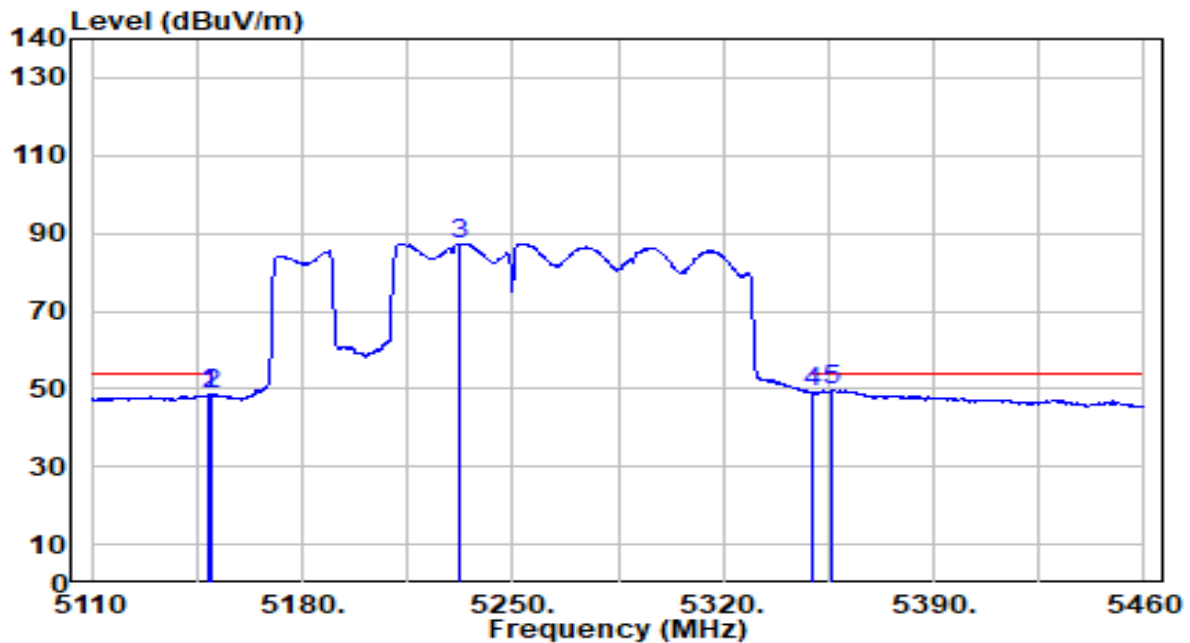


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5148.850	46.46	1.94	48.39	-5.61	54.00	285	55	Average
2	5150.000	46.45	1.94	48.39	-5.61	54.00	285	55	Average
3	5232.150	85.41	1.95	87.37	N/A	N/A	285	55	Average
4	5350.000	47.12	1.90	49.02	-4.98	54.00	285	55	Average
5	* 5356.050	47.79	1.90	49.69	-4.31	54.00	285	55	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_996+484+242_20_PUN3_TX_Band1,2_CH 50_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

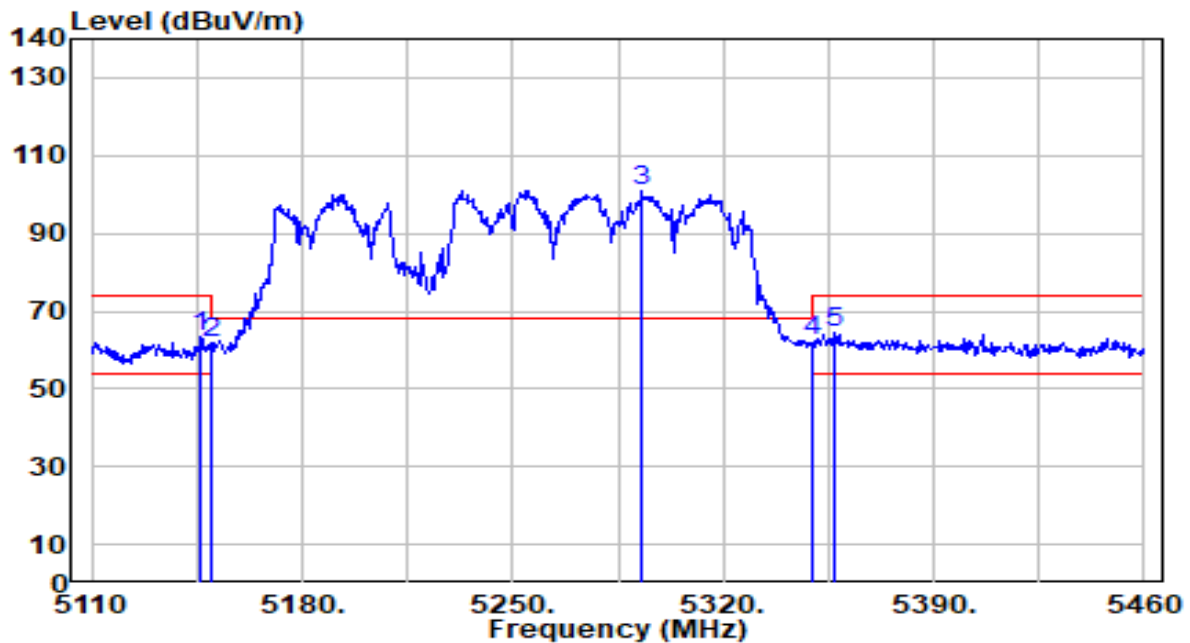


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5146.400	61.39	1.93	63.32	-10.68	74.00	215	136	Peak
2	5150.000	59.91	1.94	61.85	-12.15	74.00	215	136	Peak
3	5292.700	99.15	1.93	101.07	N/A	N/A	215	136	Peak
4	5350.000	60.50	1.90	62.40	-11.60	74.00	215	136	Peak
5	* 5356.750	62.29	1.90	64.19	-9.81	74.00	215	136	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_996+484+242_20_PUN3_TX_Band1,2_CH 50_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

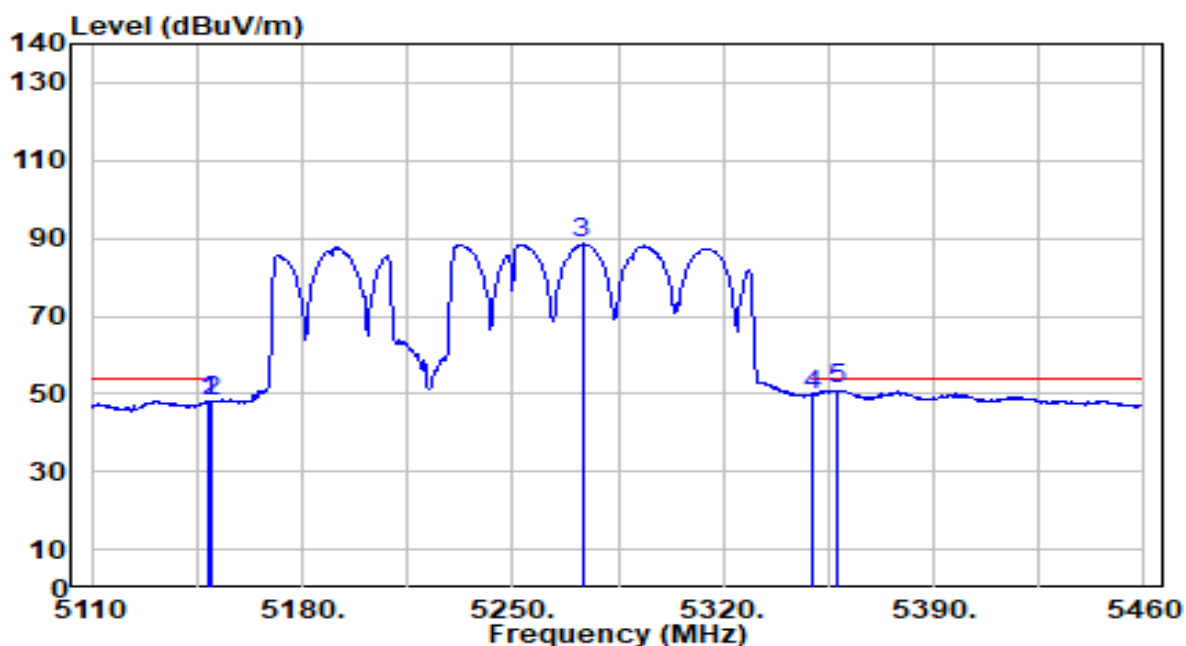


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5148.500	46.09	1.94	48.02	-5.98	54.00	215	136	Average
2	5150.000	46.07	1.94	48.01	-5.99	54.00	215	136	Average
3	5273.100	86.76	1.93	88.69	N/A	N/A	215	136	Average
4	5350.000	47.79	1.90	49.69	-4.31	54.00	215	136	Average
5	* 5357.800	49.14	1.90	51.04	-2.96	54.00	215	136	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_996+484+242_20_PUN3_TX_Band1,2_CH 50_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

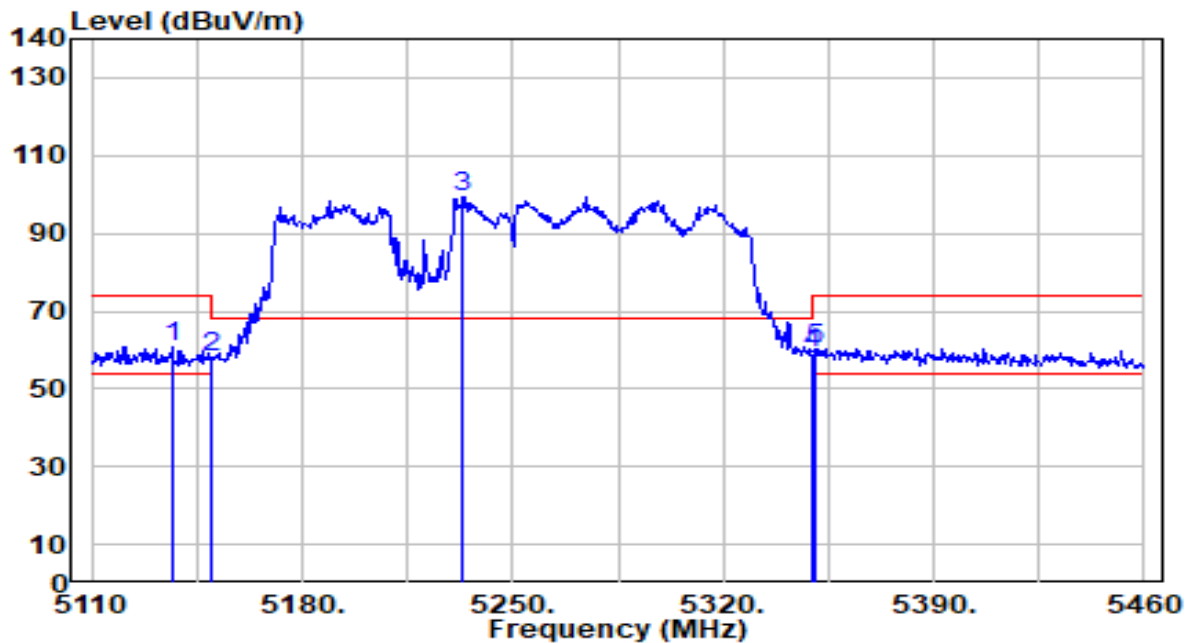


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5136.950	58.88	1.93	60.81	-13.19	74.00	285	55	Peak
2		5150.000	55.99	1.94	57.92	-16.08	74.00	285	55	Peak
3		5233.200	97.39	1.95	99.34	N/A	N/A	285	55	Peak
4		5350.000	57.31	1.90	59.21	-14.79	74.00	285	55	Peak
5		5350.800	58.27	1.90	60.17	-13.83	74.00	285	55	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_996+484+242_20_PUN3_TX_Band1,2_CH 50_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

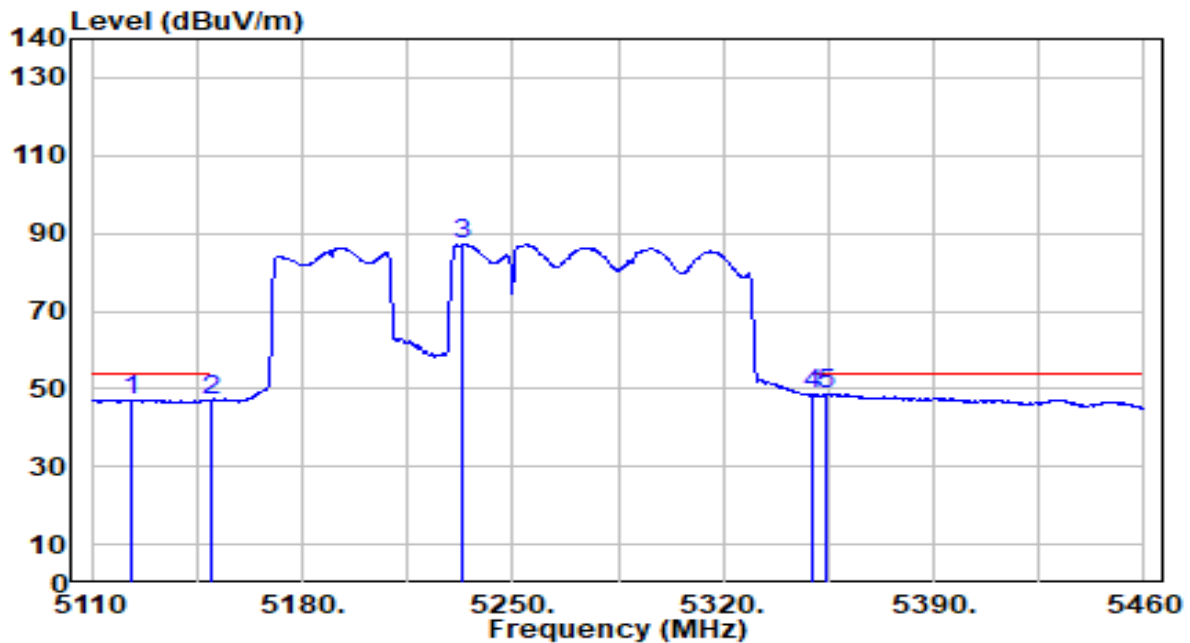


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5122.950	45.31	1.92	47.23	-6.77	54.00	285	55	Average
2	5150.000	45.30	1.94	47.23	-6.77	54.00	285	55	Average
3	5233.550	85.11	1.95	87.06	N/A	N/A	285	55	Average
4	5350.000	46.45	1.90	48.36	-5.64	54.00	285	55	Average
5	* 5354.300	46.86	1.90	48.76	-5.24	54.00	285	55	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_996+484+242_20_PUN4_TX_Band1,2_CH 50_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

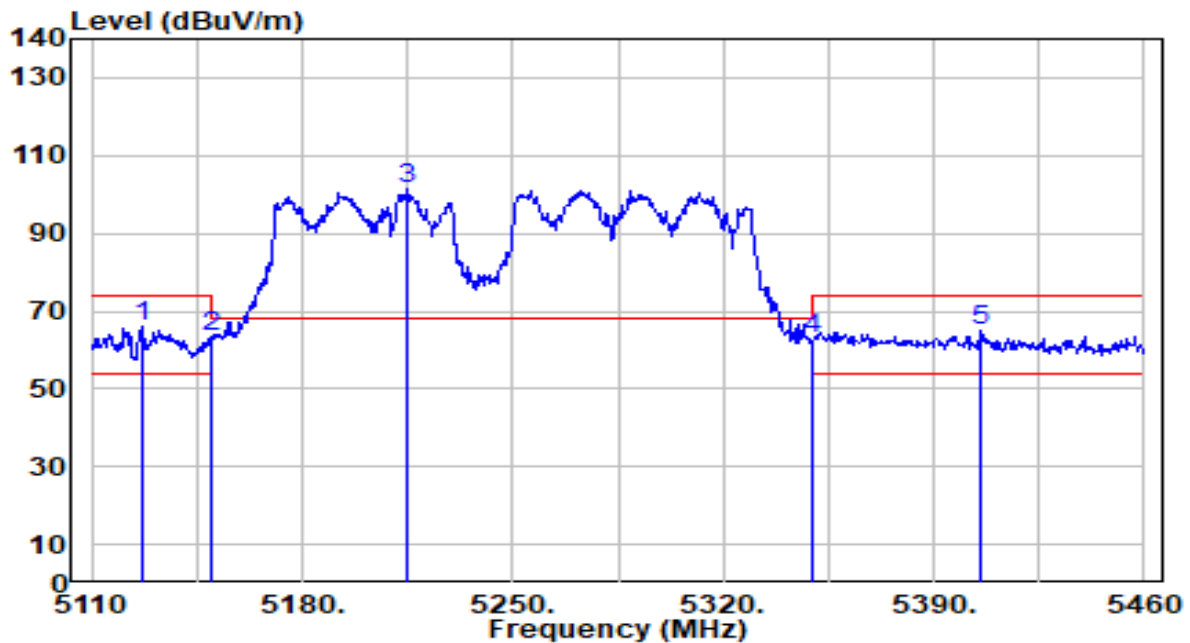


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5126.450	64.00	1.92	65.92	-8.08	74.00	215	136	Peak
2		5150.000	61.48	1.94	63.41	-10.59	74.00	215	136	Peak
3		5214.650	99.26	1.96	101.22	N/A	N/A	215	136	Peak
4		5350.000	60.85	1.90	62.76	-11.24	74.00	215	136	Peak
5		5405.750	63.31	1.90	65.22	-8.78	74.00	215	136	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_996+484+242_20_PUN4_TX_Band1,2_CH 50_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

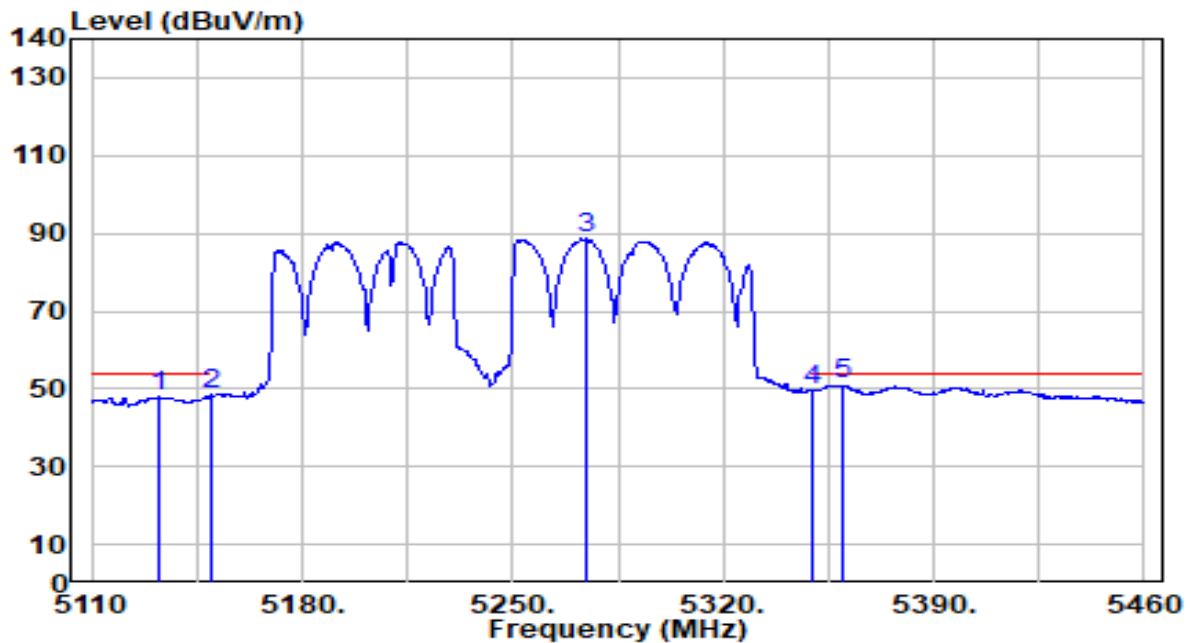


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5132.750	46.12	1.92	48.04	-5.96	54.00	215	136	Average
2	5150.000	46.42	1.94	48.36	-5.64	54.00	215	136	Average
3	5274.150	86.64	1.93	88.58	N/A	N/A	215	136	Average
4	5350.000	47.56	1.90	49.46	-4.54	54.00	215	136	Average
5	* 5359.550	49.14	1.90	51.04	-2.96	54.00	215	136	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_996+484+242_20_PUN4_TX_Band1,2_CH 50_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

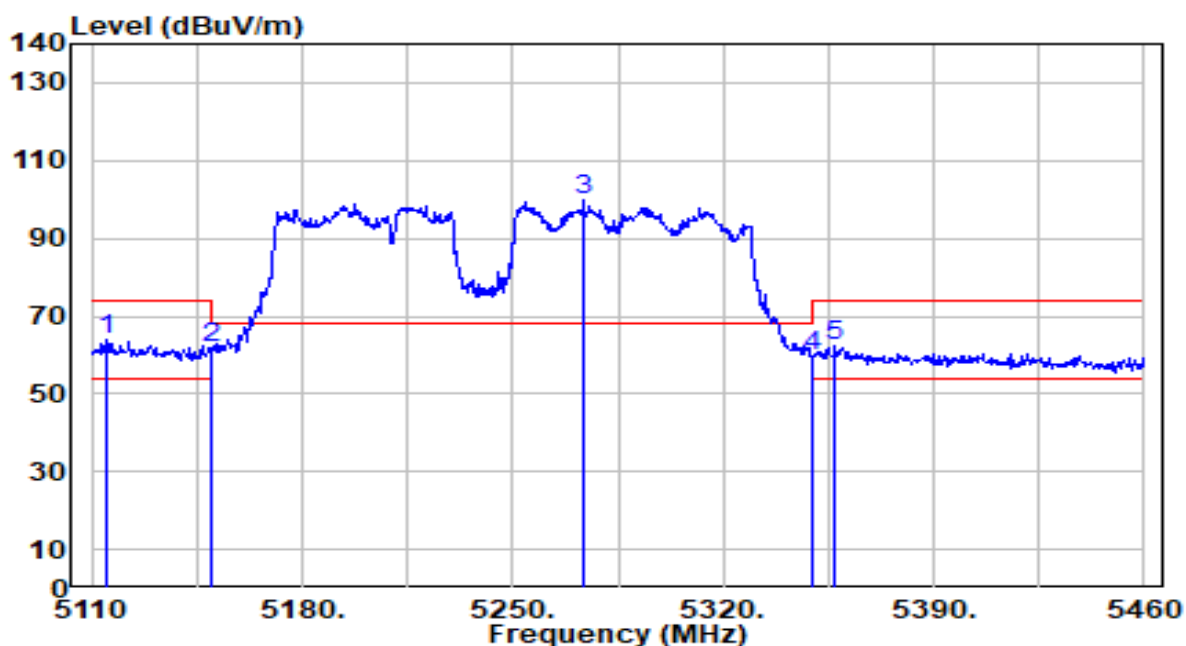


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5114.900	61.87	1.91	63.78	-10.22	74.00	285	55	Peak
2		5150.000	60.07	1.94	62.00	-12.00	74.00	285	55	Peak
3		5273.450	97.90	1.93	99.83	N/A	N/A	285	55	Peak
4		5350.000	57.76	1.90	59.66	-14.34	74.00	285	55	Peak
5		5357.100	60.31	1.90	62.21	-11.79	74.00	285	55	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_996+484+242_20_PUN4_TX_Band1,2_CH 50_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

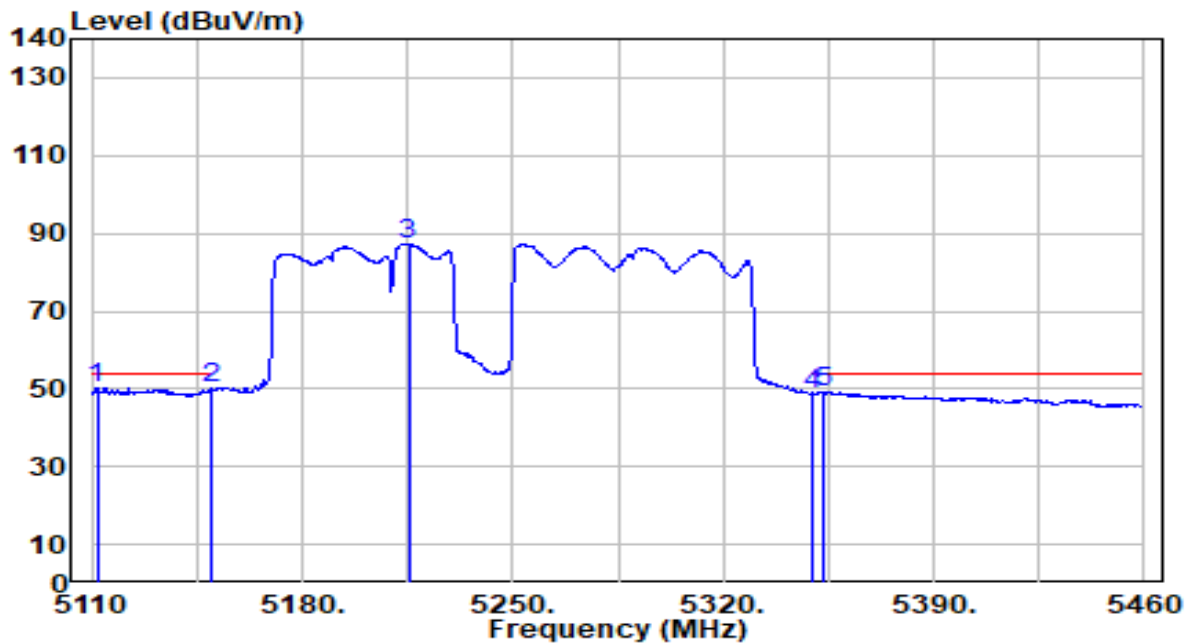


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5111.750	48.44	1.91	50.35	-3.65	54.00	285	55	Average
2		5150.000	47.99	1.94	49.93	-4.07	54.00	285	55	Average
3		5215.350	85.22	1.96	87.18	N/A	N/A	285	55	Average
4		5350.000	46.79	1.90	48.69	-5.31	54.00	285	55	Average
5		5352.900	47.42	1.90	49.32	-4.68	54.00	285	55	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_996+484+242_20_PUN5_TX_Band1,2_CH 50_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

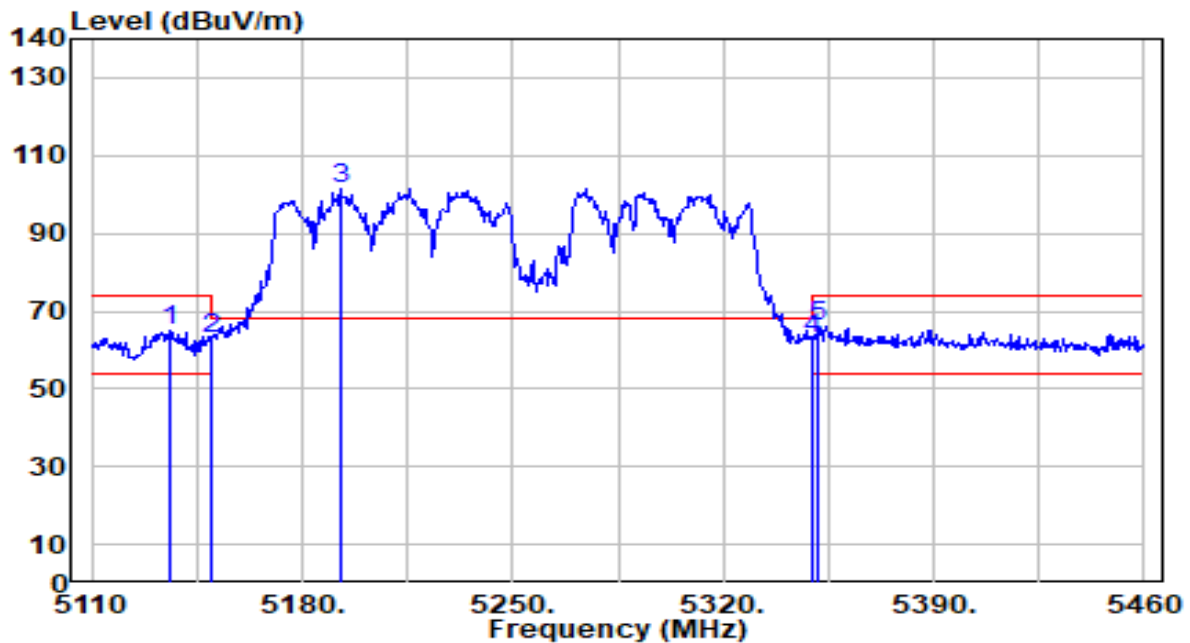


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5135.900	63.04	1.93	64.97	-9.03	74.00	215	136	Peak
2	5150.000	60.76	1.94	62.70	-11.30	74.00	215	136	Peak
3	5192.600	99.62	1.96	101.58	N/A	N/A	215	136	Peak
4	5350.000	60.79	1.90	62.70	-11.30	74.00	215	136	Peak
5	* 5351.850	64.38	1.90	66.28	-7.72	74.00	215	136	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_996+484+242_20_PUN5_TX_Band1,2_CH 50_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

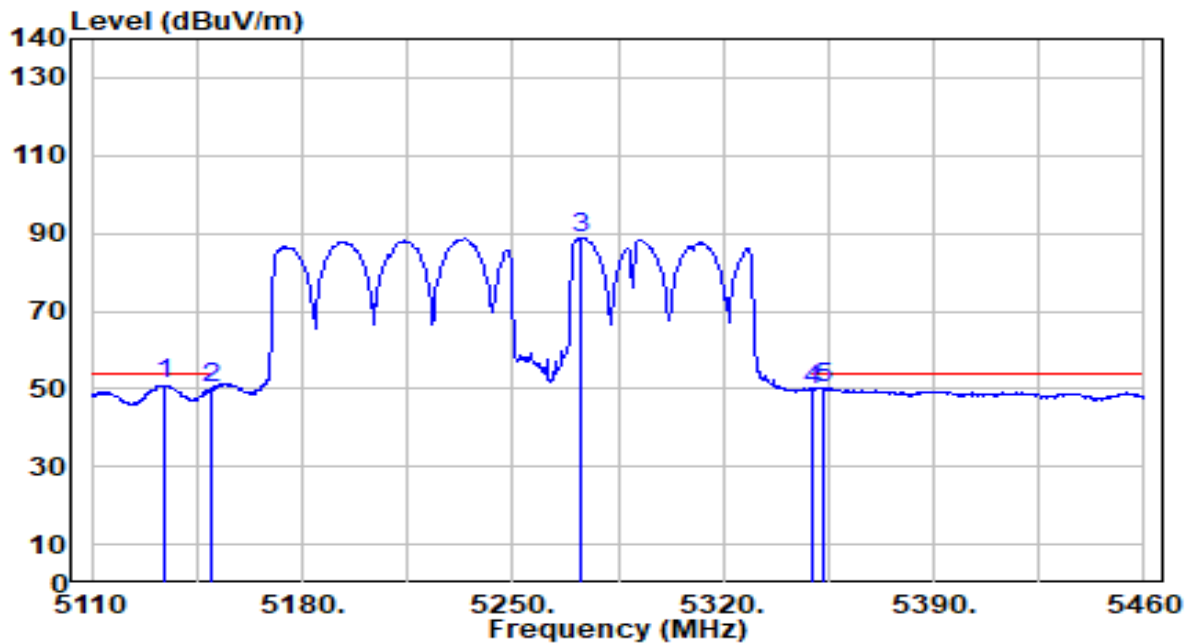


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5134.500	49.09	1.93	51.02	-2.98	54.00	215	136	Average
2		5150.000	48.50	1.94	50.44	-3.56	54.00	215	136	Average
3		5272.400	86.83	1.93	88.77	N/A	N/A	215	136	Average
4		5350.000	47.89	1.90	49.79	-4.21	54.00	215	136	Average
5		5353.600	48.46	1.90	50.37	-3.63	54.00	215	136	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_996+484+242_20_PUN5_TX_Band1,2_CH 50_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

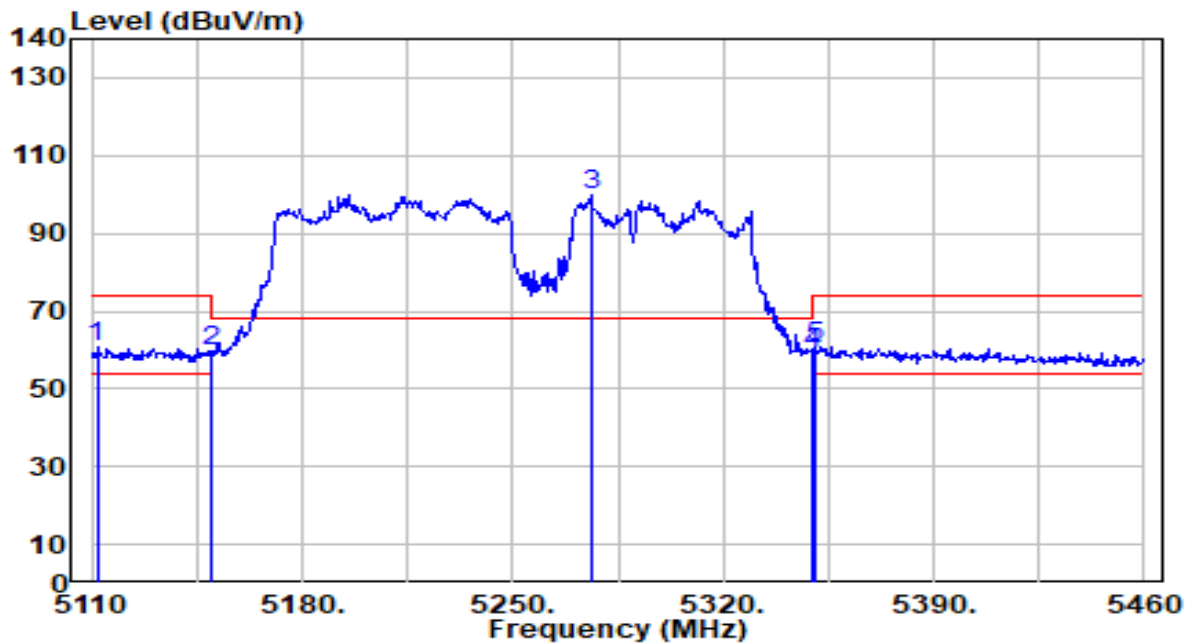


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5111.750	58.72	1.91	60.63	-13.37	74.00	285	55	Peak
2	5150.000	58.03	1.94	59.96	-14.04	74.00	285	55	Peak
3	5275.900	97.83	1.93	99.76	N/A	N/A	285	55	Peak
4	5350.000	57.28	1.90	59.18	-14.82	74.00	285	55	Peak
5	* 5350.800	59.07	1.90	60.97	-13.03	74.00	285	55	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_996+484+242_20_PUN5_TX_Band1,2_CH 50_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

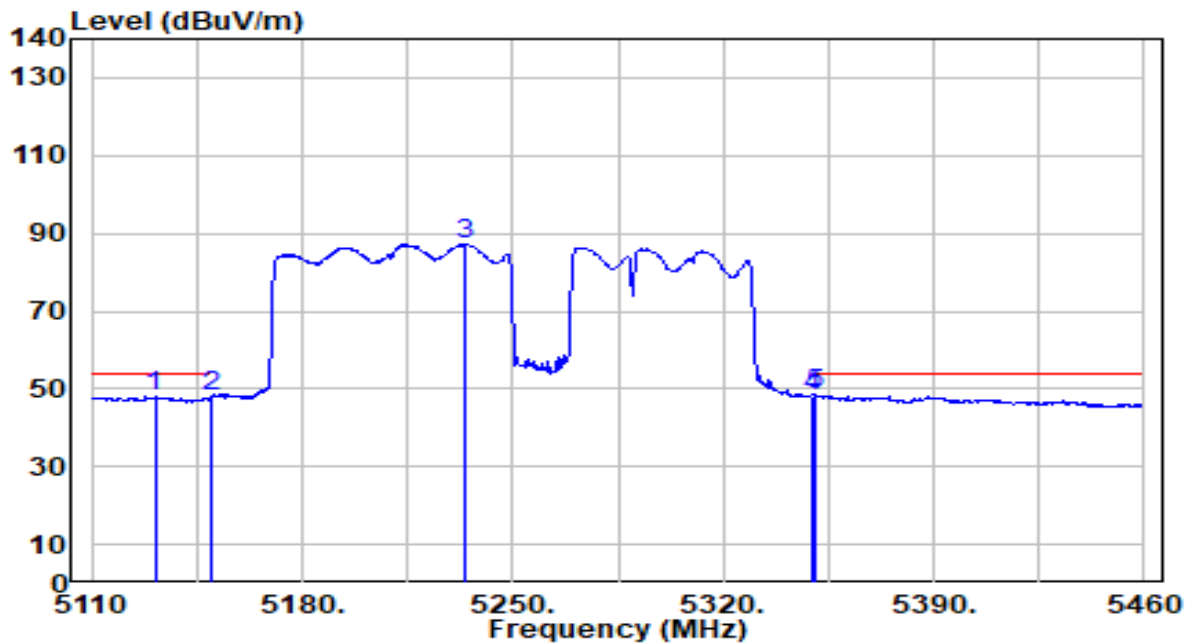


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5131.000	46.06	1.92	47.98	-6.02	54.00	285	55	Average
2	5150.000	46.02	1.94	47.95	-6.05	54.00	285	55	Average
3	5234.250	85.23	1.95	87.19	N/A	N/A	285	55	Average
4	5350.000	46.39	1.90	48.29	-5.71	54.00	285	55	Average
5	* 5350.800	46.77	1.90	48.68	-5.32	54.00	285	55	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_996+484+242_20_PUN6_TX_Band1,2_CH 50_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

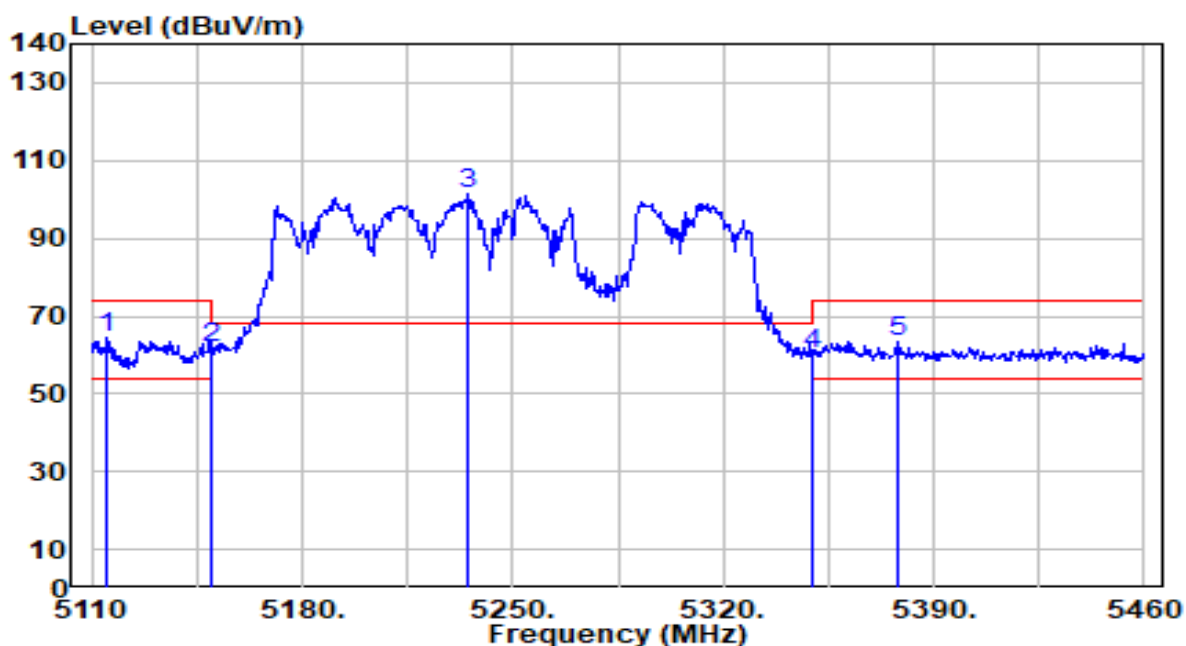


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5114.900	62.47	1.91	64.38	-9.62	74.00	215	136	Peak
2		5150.000	60.01	1.94	61.95	-12.05	74.00	215	136	Peak
3		5234.950	99.35	1.95	101.30	N/A	N/A	215	136	Peak
4		5350.000	58.37	1.90	60.28	-13.72	74.00	215	136	Peak
5		5377.750	61.75	1.89	63.64	-10.36	74.00	215	136	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_996+484+242_20_PUN6_TX_Band1,2_CH 50_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

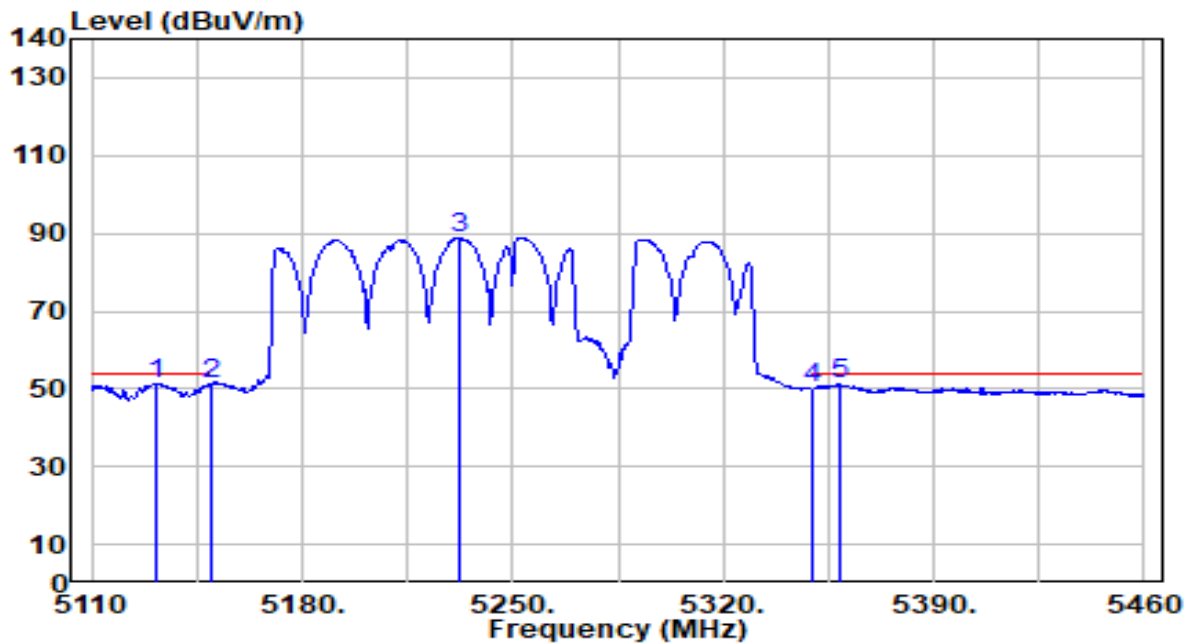


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5131.700	49.46	1.92	51.39	-2.61	54.00	215	136	Average
2		5150.000	49.10	1.94	51.04	-2.96	54.00	215	136	Average
3		5232.500	87.04	1.95	89.00	N/A	N/A	215	136	Average
4		5350.000	48.18	1.90	50.08	-3.92	54.00	215	136	Average
5		5358.500	49.30	1.90	51.20	-2.80	54.00	215	136	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_996+484+242_20_PUN6_TX_Band1,2_CH 50_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

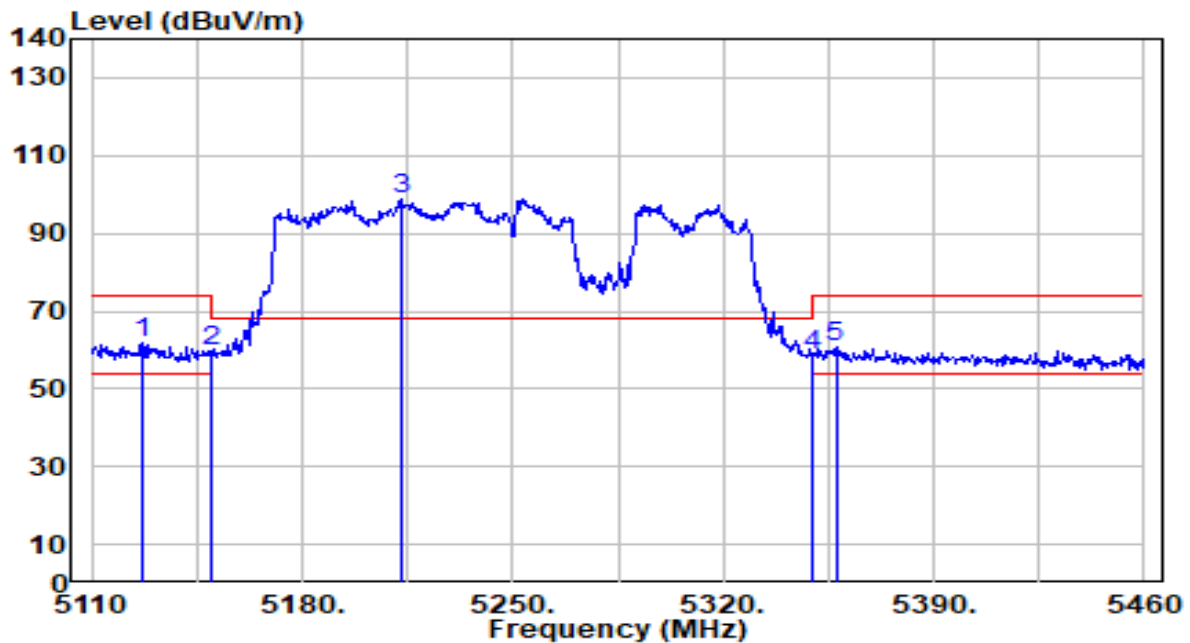


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5126.450	59.69	1.92	61.61	-12.39	74.00	285	55	Peak
2		5150.000	57.50	1.94	59.44	-14.56	74.00	285	55	Peak
3		5212.900	96.68	1.96	98.64	N/A	N/A	285	55	Peak
4		5350.000	56.99	1.90	58.89	-15.11	74.00	285	55	Peak
5		5357.450	58.71	1.90	60.61	-13.39	74.00	285	55	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_996+484+242_20_PUN6_TX_Band1,2_CH 50_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

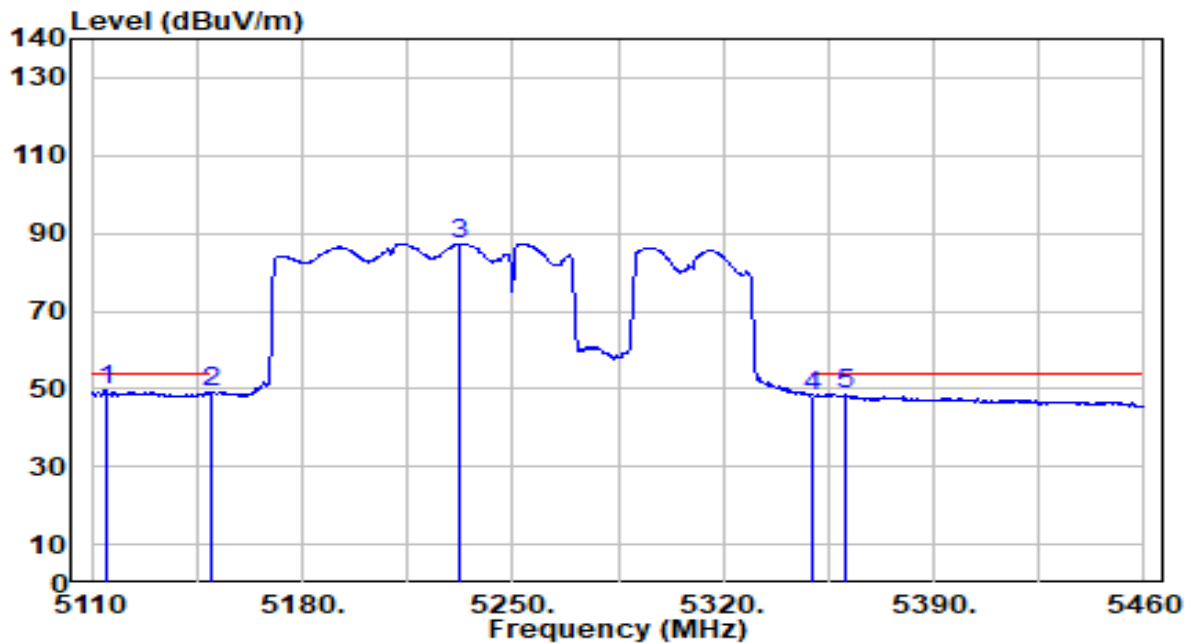


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5114.900	47.83	1.91	49.74	-4.26	54.00	285	55	Average
2		5150.000	47.12	1.94	49.05	-4.95	54.00	285	55	Average
3		5232.150	85.48	1.95	87.43	N/A	N/A	285	55	Average
4		5350.000	46.16	1.90	48.06	-5.94	54.00	285	55	Average
5		5360.950	46.85	1.90	48.75	-5.25	54.00	285	55	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_996+484+242_20_PUN7_TX_Band1,2_CH 50_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

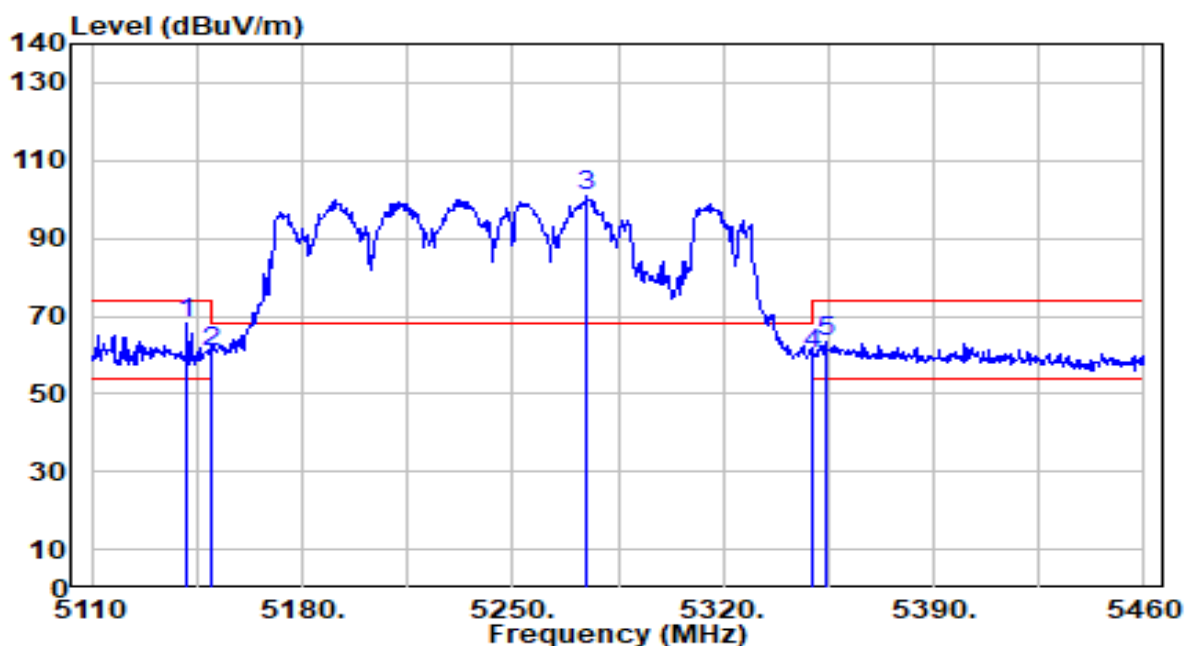


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5141.850	65.98	1.93	67.91	-6.09	74.00	215	136	Peak
2		5150.000	58.66	1.94	60.59	-13.41	74.00	215	136	Peak
3		5274.850	98.78	1.93	100.72	N/A	N/A	215	136	Peak
4		5350.000	58.10	1.90	60.01	-13.99	74.00	215	136	Peak
5		5353.950	61.39	1.90	63.29	-10.71	74.00	215	136	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_996+484+242_20_PUN7_TX_Band1,2_CH 50_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

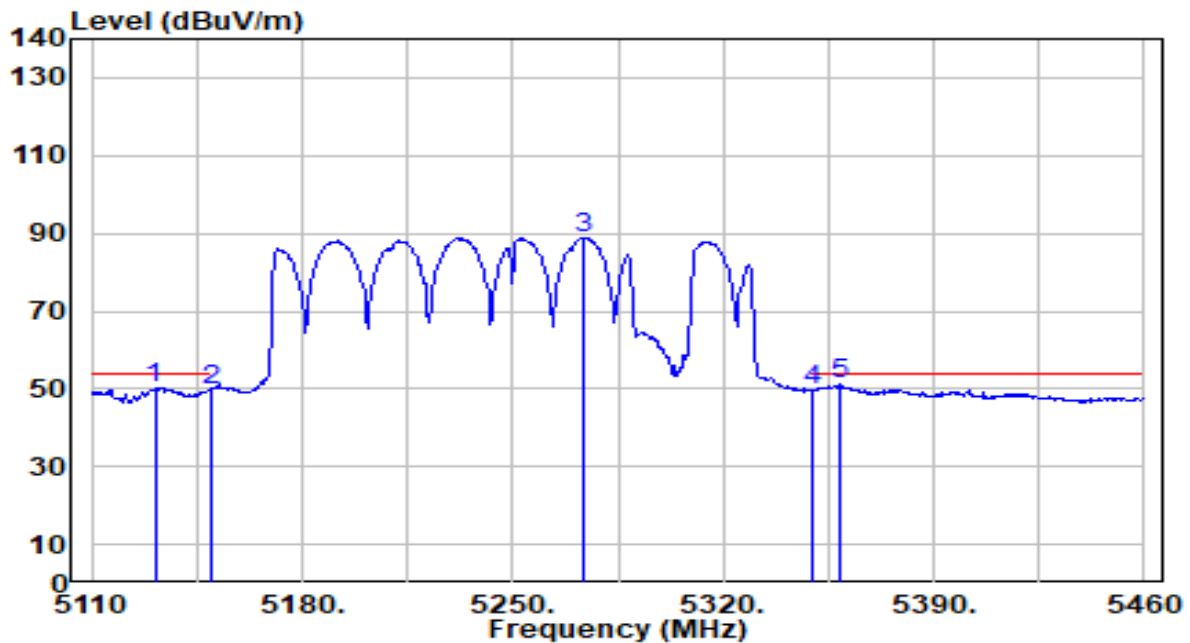


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5131.000	48.29	1.92	50.21	-3.79	54.00	215	136	Average
2	5150.000	47.85	1.94	49.78	-4.22	54.00	215	136	Average
3	5273.800	86.92	1.93	88.85	N/A	N/A	215	136	Average
4	5350.000	47.84	1.90	49.74	-4.26	54.00	215	136	Average
5	* 5359.200	49.14	1.90	51.04	-2.96	54.00	215	136	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_996+484+242_20_PUN7_TX_Band1,2_CH 50_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

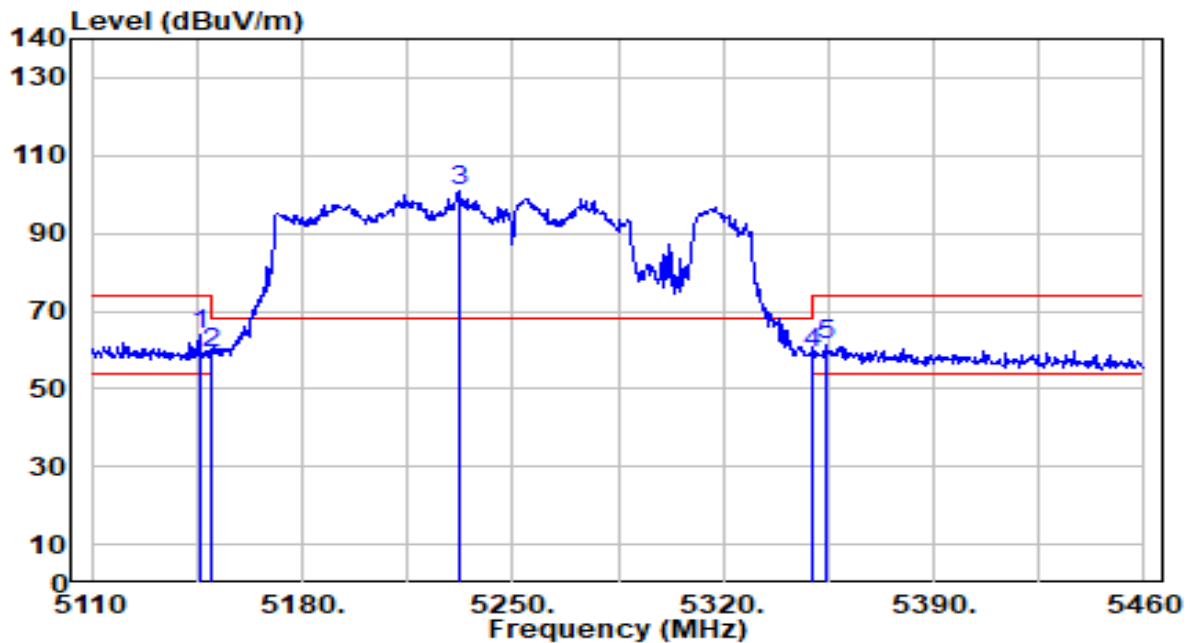


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5146.050	61.80	1.93	63.74	-10.26	74.00	285	55	Peak
2		5150.000	57.20	1.94	59.14	-14.86	74.00	285	55	Peak
3		5232.150	98.77	1.95	100.73	N/A	N/A	285	55	Peak
4		5350.000	57.10	1.90	59.01	-14.99	74.00	285	55	Peak
5		5353.950	59.21	1.90	61.11	-12.89	74.00	285	55	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_996+484+242_20_PUN7_TX_Band1,2_CH 50_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

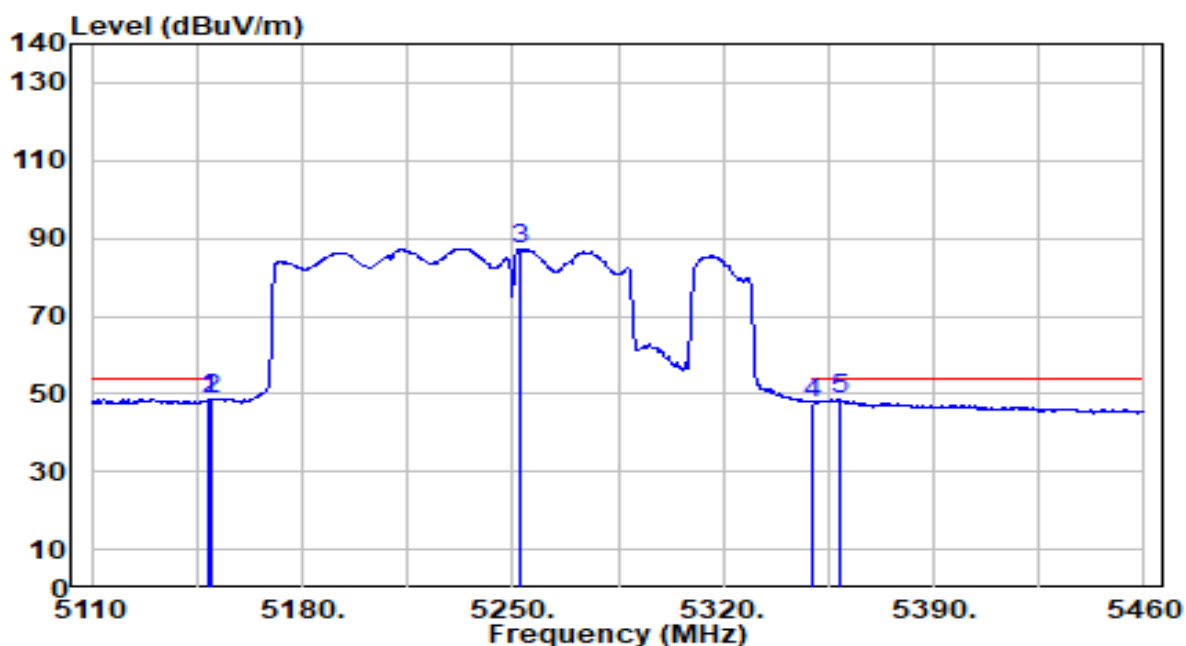


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5148.850	46.75	1.94	48.69	-5.31	54.00	285	55	Average
2	5150.000	46.44	1.94	48.37	-5.63	54.00	285	55	Average
3	5252.800	85.24	1.94	87.19	N/A	N/A	285	55	Average
4	5350.000	45.86	1.90	47.76	-6.24	54.00	285	55	Average
5	* 5359.200	46.83	1.90	48.73	-5.27	54.00	285	55	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_996+484+242_20_PUN8_TX_Band1,2_CH 50_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

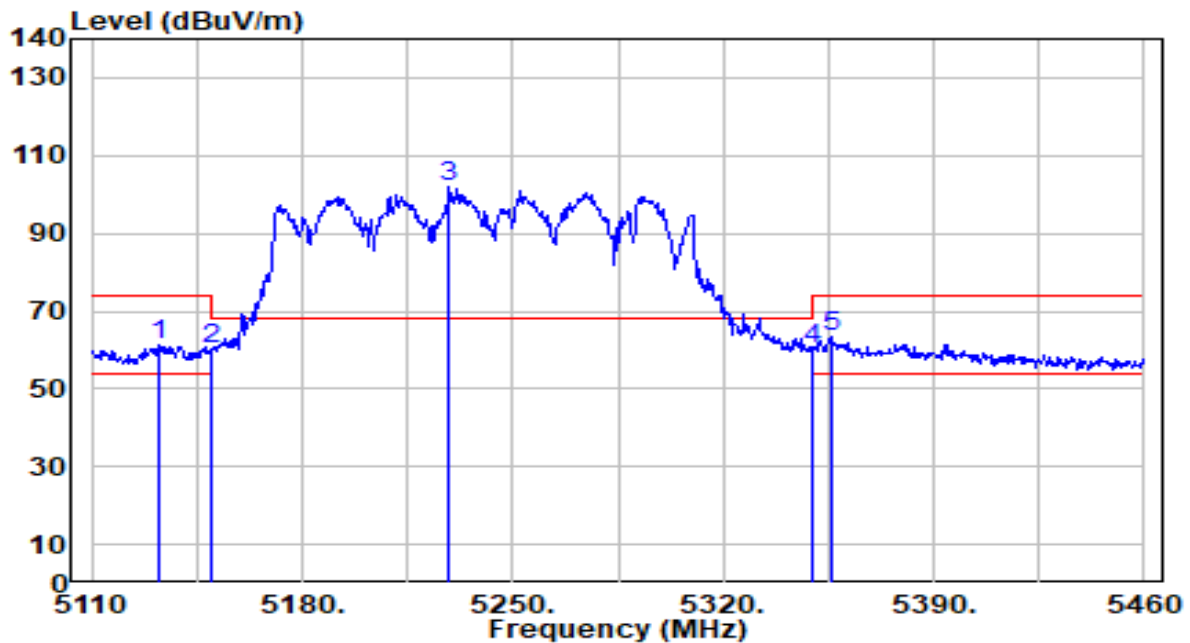


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5132.750	59.14	1.92	61.07	-12.93	74.00	215	136	Peak
2	5150.000	58.37	1.94	60.31	-13.69	74.00	215	136	Peak
3	5229.000	99.84	1.95	101.80	N/A	N/A	215	136	Peak
4	5350.000	58.11	1.90	60.02	-13.98	74.00	215	136	Peak
5	* 5356.400	61.63	1.90	63.54	-10.46	74.00	215	136	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_996+484+242_20_PUN8_TX_Band1,2_CH 50_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

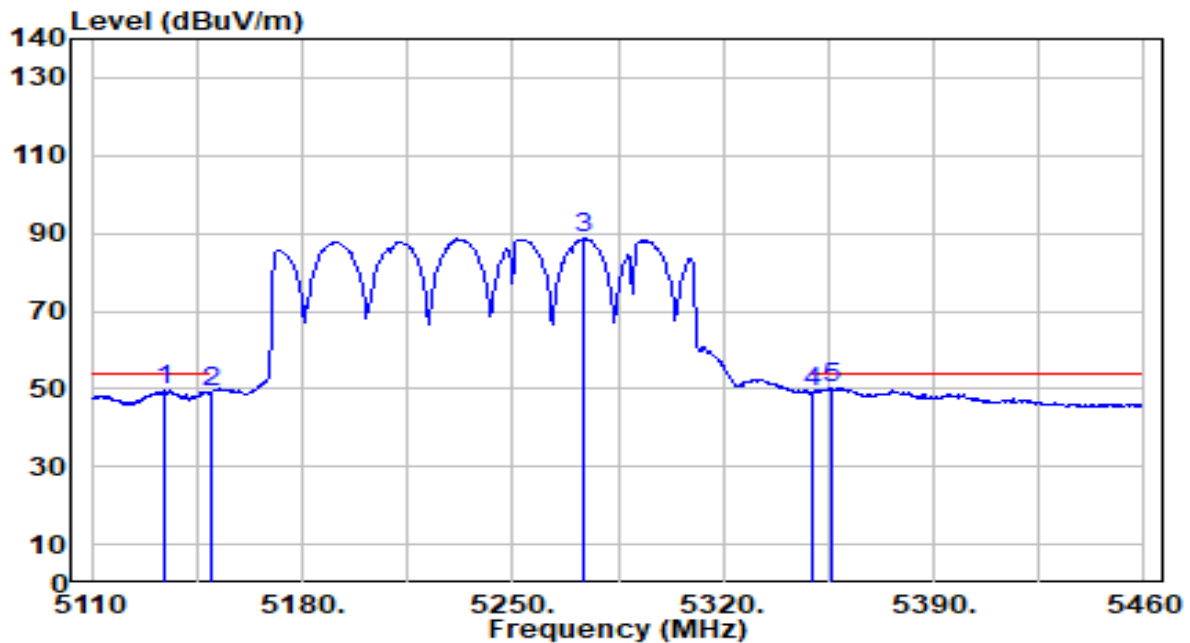


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5133.800	47.76	1.93	49.68	-4.32	54.00	215	136	Average
2	5150.000	47.22	1.94	49.16	-4.84	54.00	215	136	Average
3	5273.800	86.66	1.93	88.60	N/A	N/A	215	136	Average
4	5350.000	47.34	1.90	49.25	-4.75	54.00	215	136	Average
5	* 5356.050	48.43	1.90	50.34	-3.66	54.00	215	136	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_996+484+242_20_PUN8_TX_Band1,2_CH 50_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

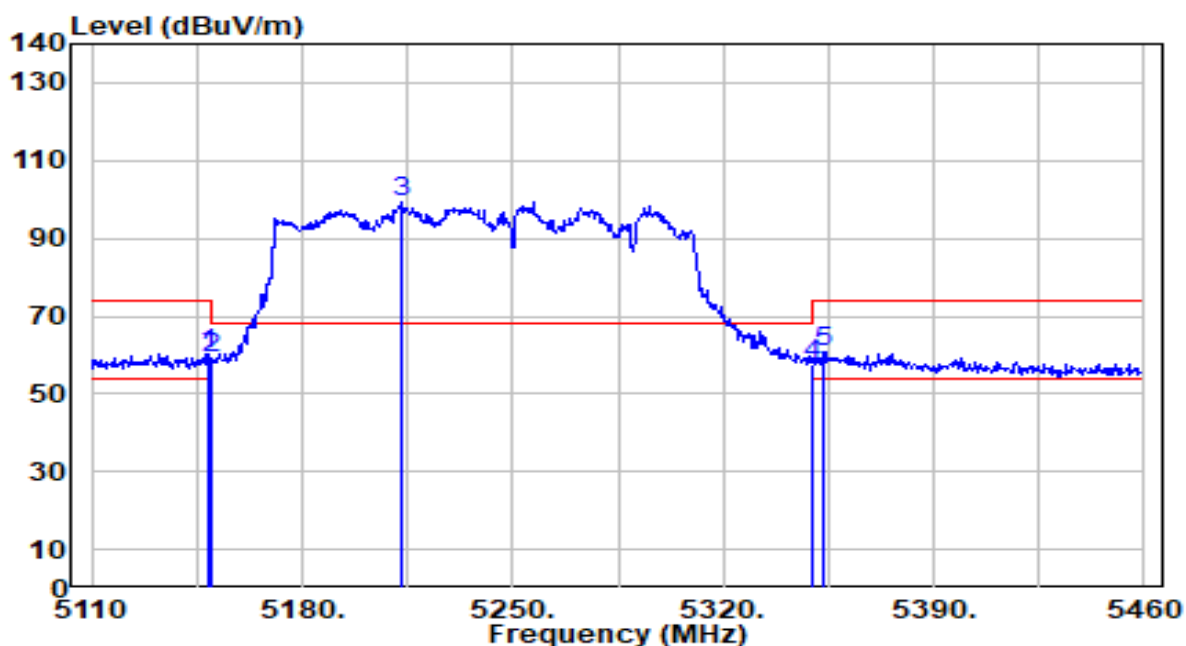


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5148.500	58.53	1.94	60.46	-13.54	74.00	285	55	Peak
2	5150.000	57.11	1.94	59.04	-14.96	74.00	285	55	Peak
3	5212.900	97.47	1.96	99.44	N/A	N/A	285	55	Peak
4	5350.000	55.46	1.90	57.37	-16.63	74.00	285	55	Peak
5	* 5353.250	59.12	1.90	61.02	-12.98	74.00	285	55	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_996+484+242_20_PUN8_TX_Band1,2_CH 50_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

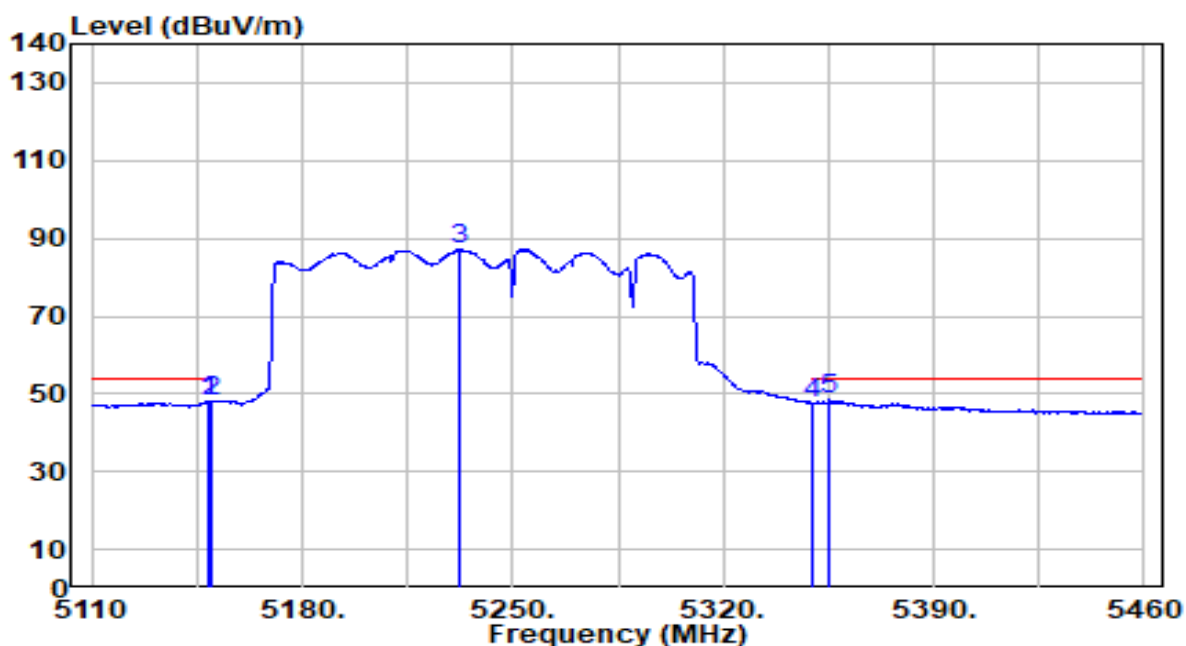


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5148.850	46.01	1.94	47.94	-6.06	54.00	285	55	Average
2	5150.000	46.15	1.94	48.09	-5.91	54.00	285	55	Average
3	5232.150	85.06	1.95	87.02	N/A	N/A	285	55	Average
4	5350.000	45.71	1.90	47.61	-6.39	54.00	285	55	Average
5	* 5355.350	46.53	1.90	48.43	-5.57	54.00	285	55	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_996+484_40_PUN3_TX_Band3_CH114_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

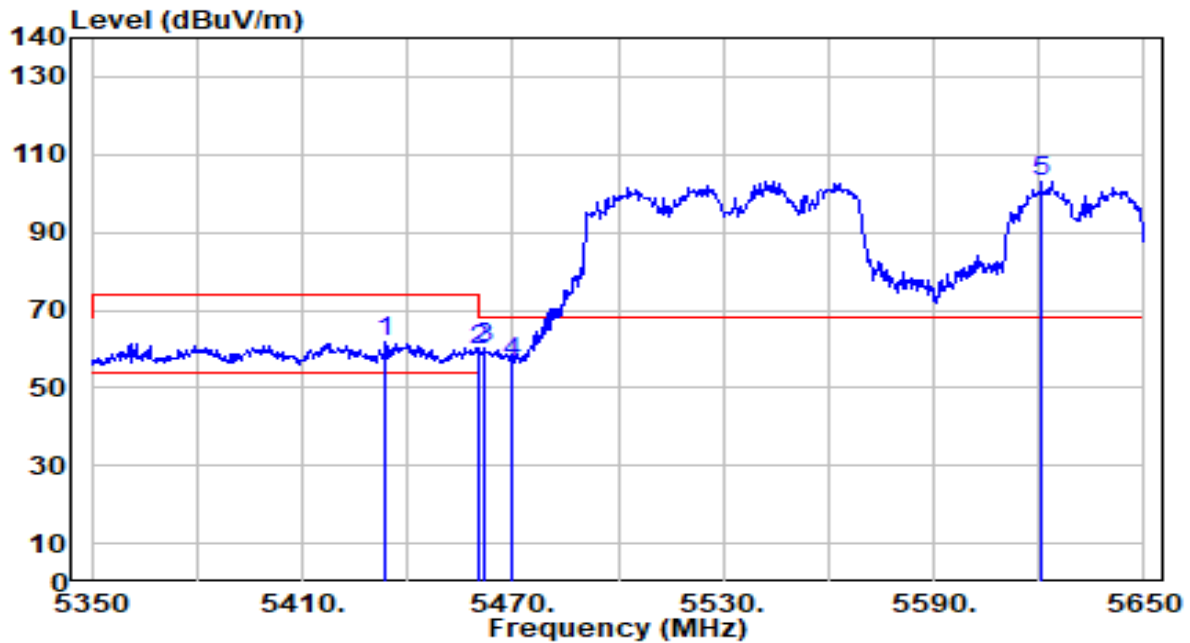


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5433.700	59.68	1.99	61.68	-12.32	74.00	178	346	Peak
2	5460.000	57.40	2.07	59.48	-14.52	74.00	178	346	Peak
3	* 5462.200	58.02	2.08	60.10	-8.10	68.20	178	346	Peak
4	5470.000	54.61	2.11	56.72	-11.48	68.20	178	346	Peak
5	5620.600	100.28	2.70	102.98	N/A	N/A	178	346	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_996+484_40_PUN3_TX_Band3_CH114_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

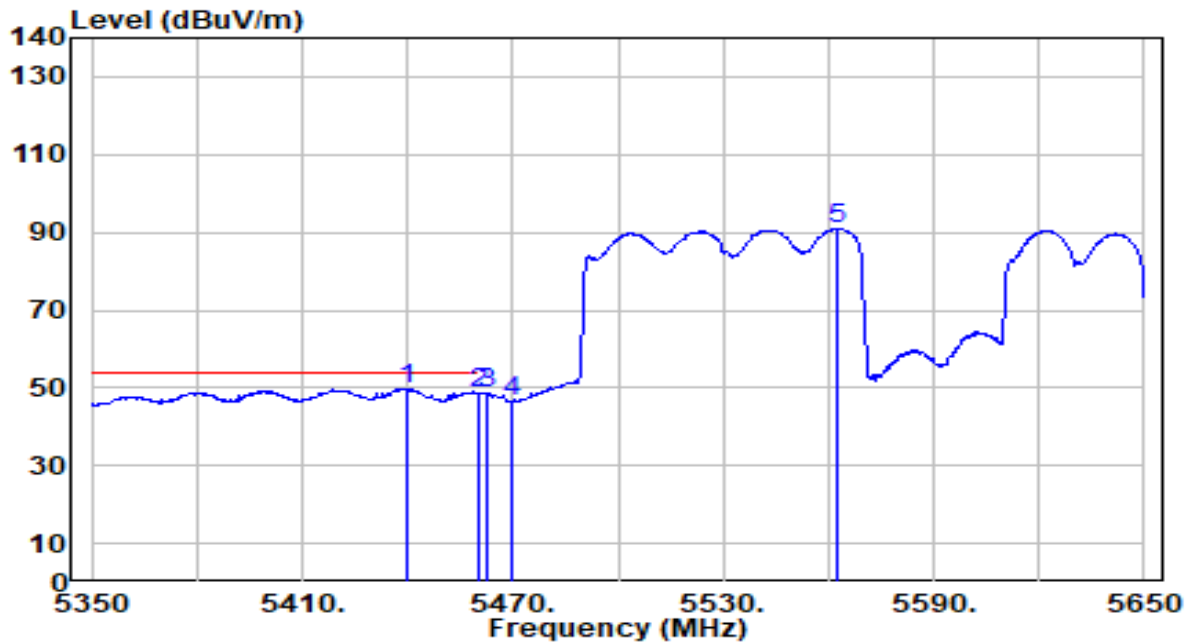


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5439.700	47.82	2.01	49.83	-4.17	54.00	178	346	Average
2		5460.000	46.46	2.07	48.53	-5.47	54.00	178	346	Average
3		5462.500	46.44	2.08	48.52	N/A	N/A	178	346	Average
4		5470.000	44.46	2.11	46.56	N/A	N/A	178	346	Average
5		5562.700	88.56	2.45	91.01	N/A	N/A	178	346	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_996+484_40_PUN3_TX_Band3_CH114_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

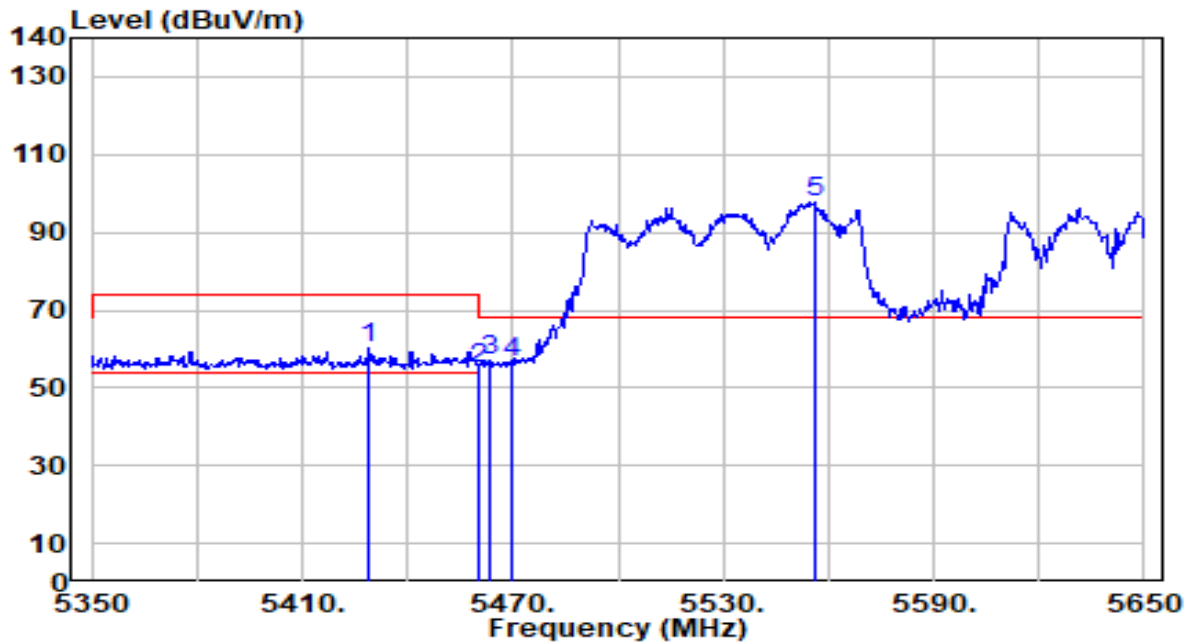


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5429.200	58.33	1.98	60.30	-13.70	74.00	255	84	Peak
2	5460.000	52.76	2.07	54.83	-19.17	74.00	255	84	Peak
3	* 5463.100	55.09	2.08	57.18	-11.02	68.20	255	84	Peak
4	5470.000	54.26	2.11	56.37	-11.83	68.20	255	84	Peak
5	5556.100	95.50	2.42	97.92	N/A	N/A	255	84	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_996+484_40_PUN3_TX_Band3_CH114_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

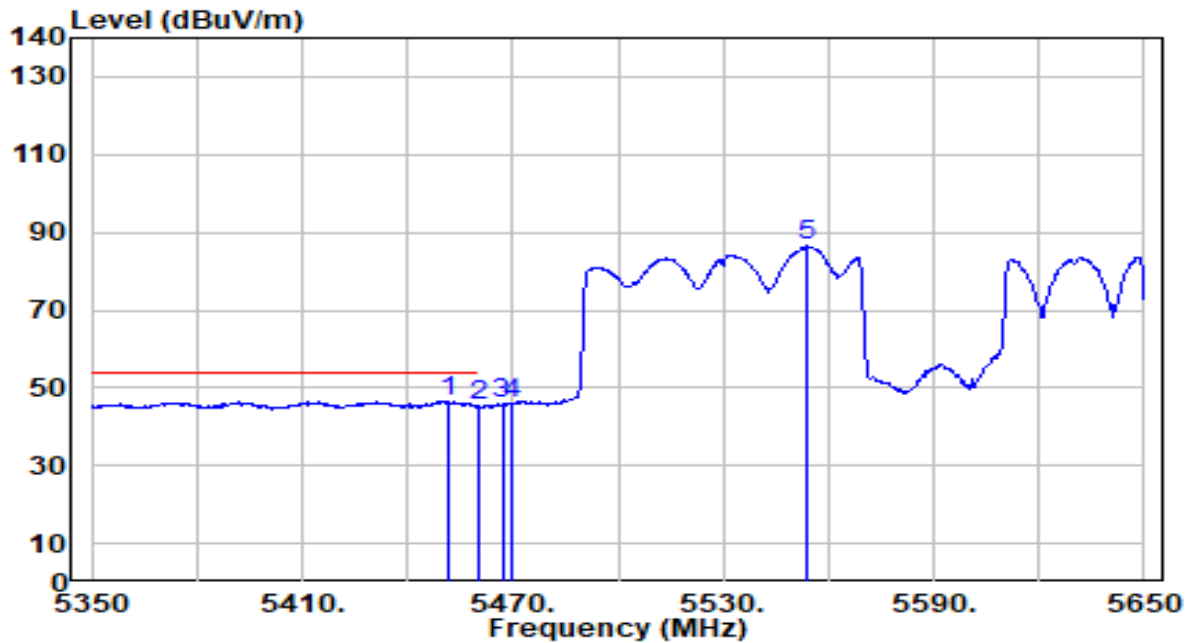


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5452.000	44.44	2.05	46.49	-7.51	54.00	255	84	Average
2		5460.000	43.21	2.07	45.28	-8.72	54.00	255	84	Average
3		5467.000	43.72	2.10	45.82	N/A	N/A	255	84	Average
4		5470.000	43.85	2.11	45.96	N/A	N/A	255	84	Average
5		5554.000	83.99	2.41	86.40	N/A	N/A	255	84	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_996+484+242_20_PUN2_TX_Band3_CH 114_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

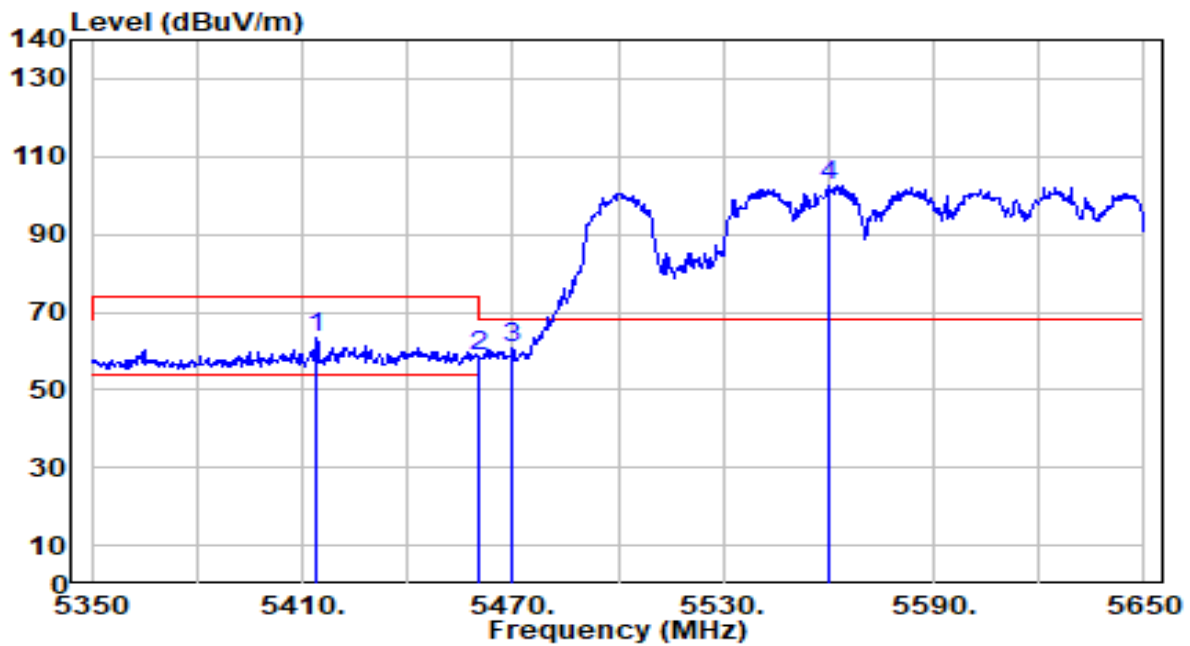


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5413.900	61.70	1.93	63.63	-10.37	74.00	178	346	Peak
2	5460.000	56.33	2.07	58.40	-15.60	74.00	178	346	Peak
3	* 5470.000	58.39	2.11	60.49	-7.71	68.20	178	346	Peak
4	5560.300	100.18	2.44	102.62	N/A	N/A	178	346	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_996+484+242_20_PUN2_TX_Band3_CH 114_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

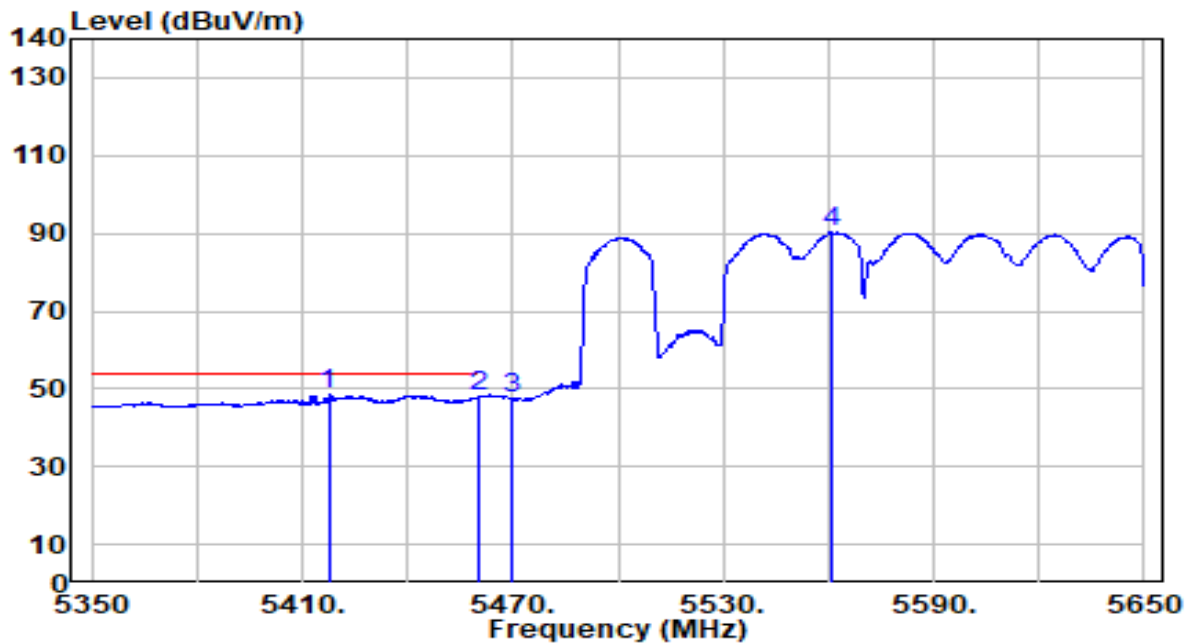


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5417.500	46.63	1.94	48.57	-5.43	54.00	178	346	Average
2		5460.000	46.05	2.07	48.12	-5.88	54.00	178	346	Average
3		5470.000	45.31	2.11	47.41	N/A	N/A	178	346	Average
4		5560.600	87.77	2.44	90.21	N/A	N/A	178	346	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_996+484+242_20_PUN2_TX_Band3_CH 114_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

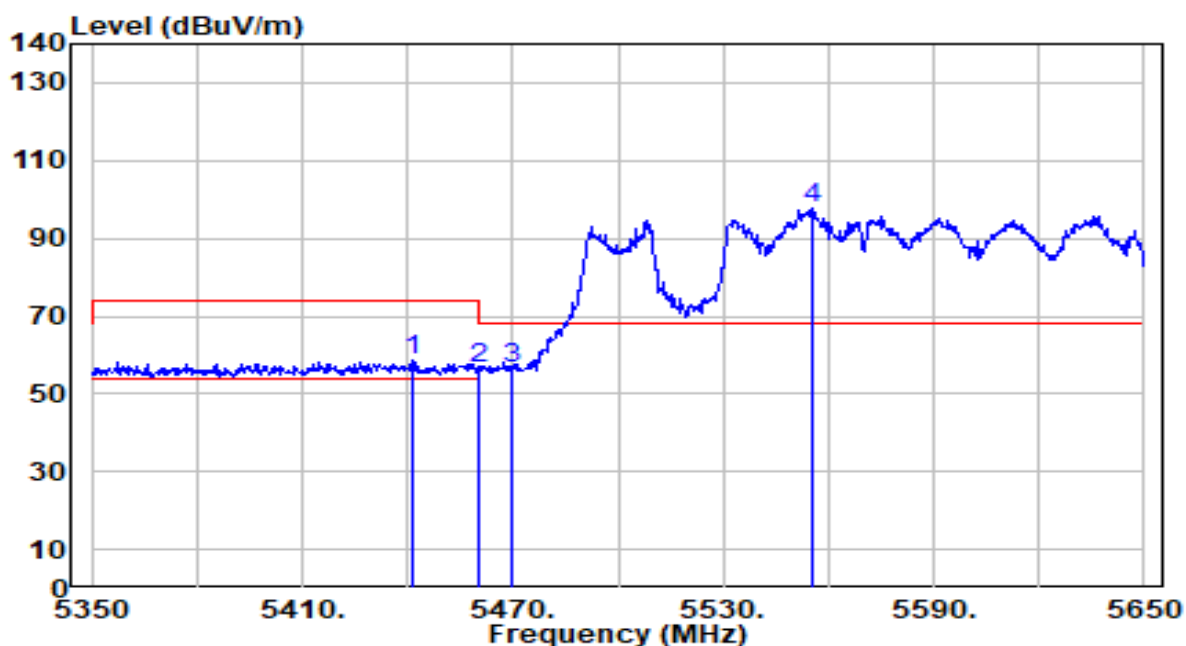


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5441.800	56.51	2.02	58.53	-15.47	74.00	255	84	Peak
2	5460.000	54.51	2.07	56.58	-17.42	74.00	255	84	Peak
3	* 5470.000	54.41	2.11	56.51	-11.69	68.20	255	84	Peak
4	5555.200	95.11	2.42	97.53	N/A	N/A	255	84	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_996+484+242_20_PUN2_TX_Band3_CH 114_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

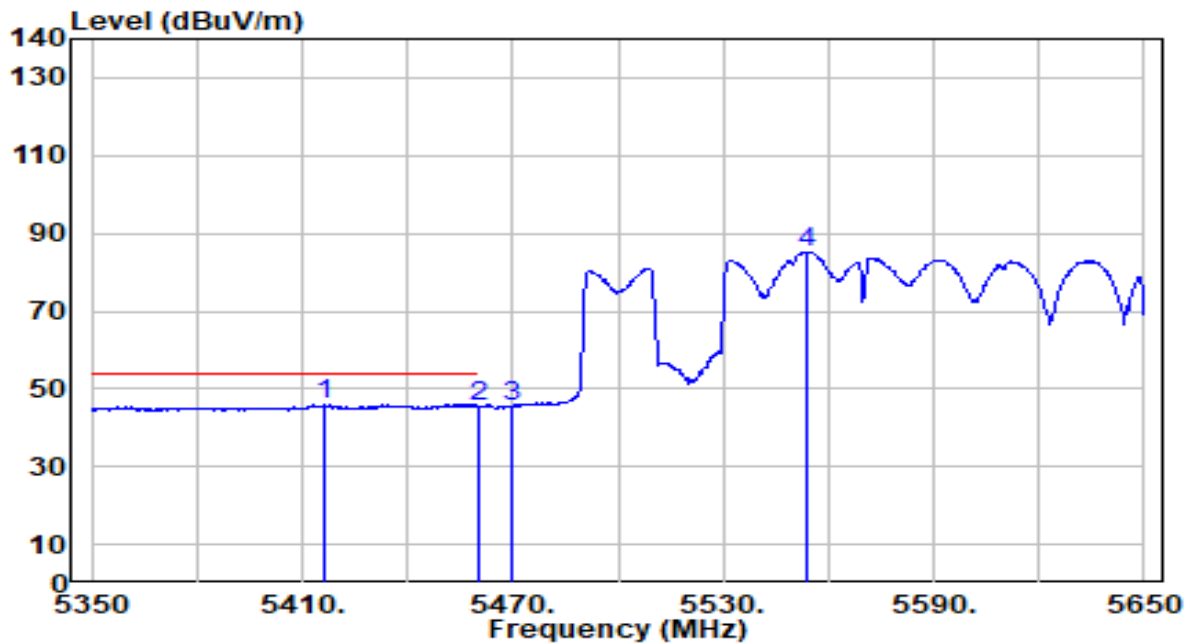


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5416.300	44.16	1.94	46.09	-7.91	54.00	255	84	Average
2		5460.000	43.50	2.07	45.57	-8.43	54.00	255	84	Average
3		5470.000	43.30	2.11	45.40	N/A	N/A	255	84	Average
4		5554.000	82.85	2.41	85.27	N/A	N/A	255	84	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_996+484+242_20_PUN3_TX_Band3_CH 114_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

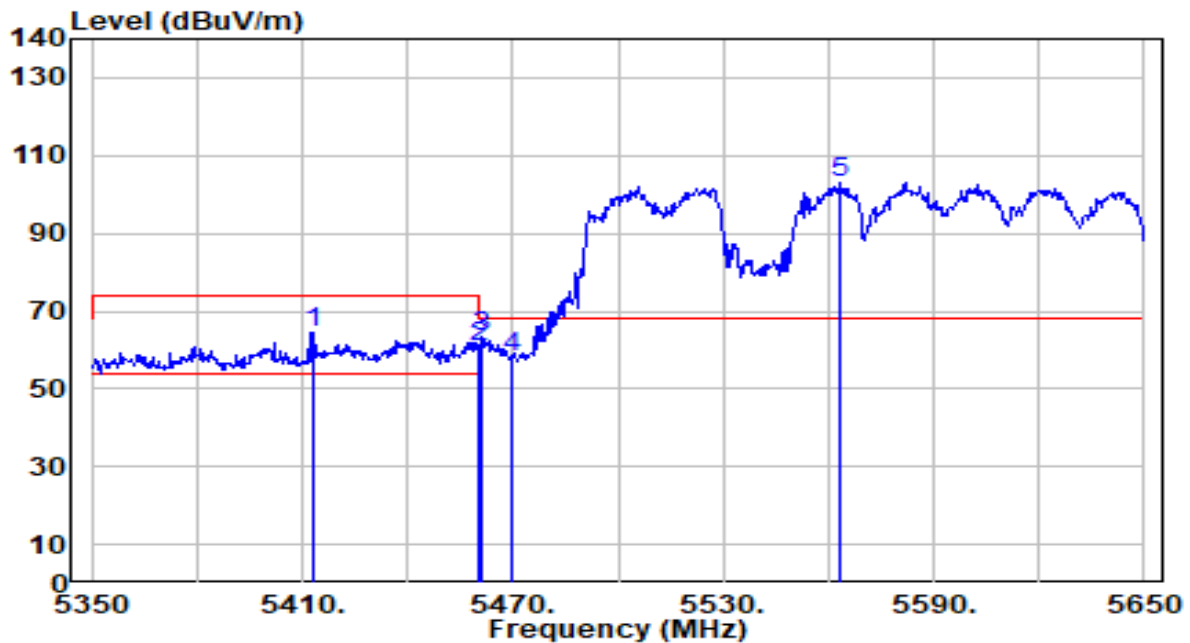


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5413.000	62.54	1.93	64.47	-9.53	74.00	178	346	Peak
2	5460.000	58.66	2.07	60.73	-13.27	74.00	178	346	Peak
3	* 5461.300	61.31	2.08	63.39	-4.81	68.20	178	346	Peak
4	5470.000	56.00	2.11	58.11	-10.09	68.20	178	346	Peak
5	5563.600	100.36	2.45	102.81	N/A	N/A	178	346	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_996+484+242_20_PUN3_TX_Band3_CH 114_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

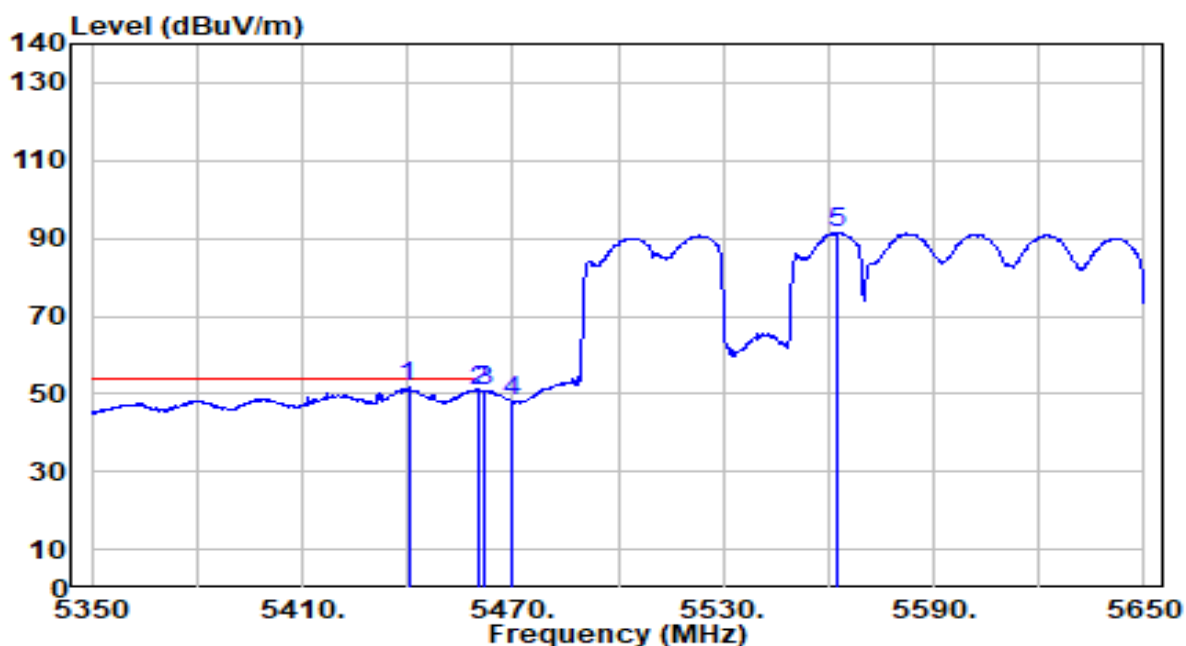


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5440.300	49.52	2.01	51.53	-2.47	54.00	178	346	Average
2		5460.000	48.82	2.07	50.89	-3.11	54.00	178	346	Average
3		5461.900	48.89	2.08	50.97	N/A	N/A	178	346	Average
4		5470.000	45.72	2.11	47.82	N/A	N/A	178	346	Average
5		5562.400	89.09	2.45	91.54	N/A	N/A	178	346	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_996+484+242_20_PUN3_TX_Band3_CH 114_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

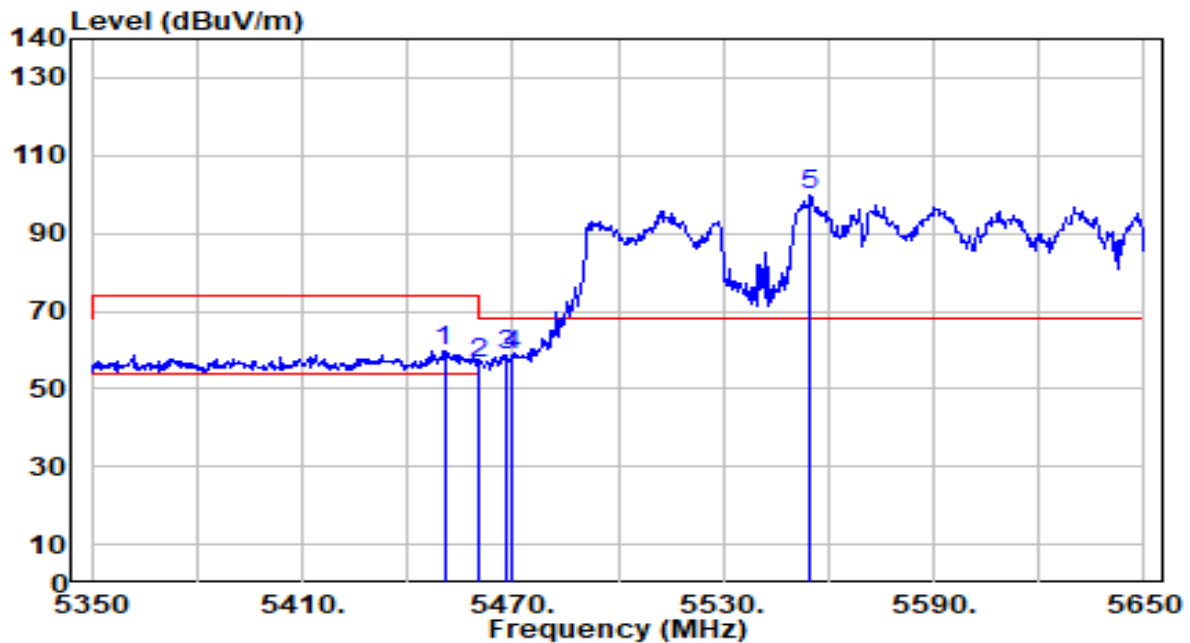


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5450.500	57.63	2.04	59.67	-14.33	74.00	255	84	Peak
2	5460.000	54.39	2.07	56.46	-17.54	74.00	255	84	Peak
3	5468.200	56.58	2.10	58.68	-9.52	68.20	255	84	Peak
4	* 5470.000	56.61	2.11	58.71	-9.49	68.20	255	84	Peak
5	5554.600	97.26	2.42	99.68	N/A	N/A	255	84	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_996+484+242_20_PUN3_TX_Band3_CH 114_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

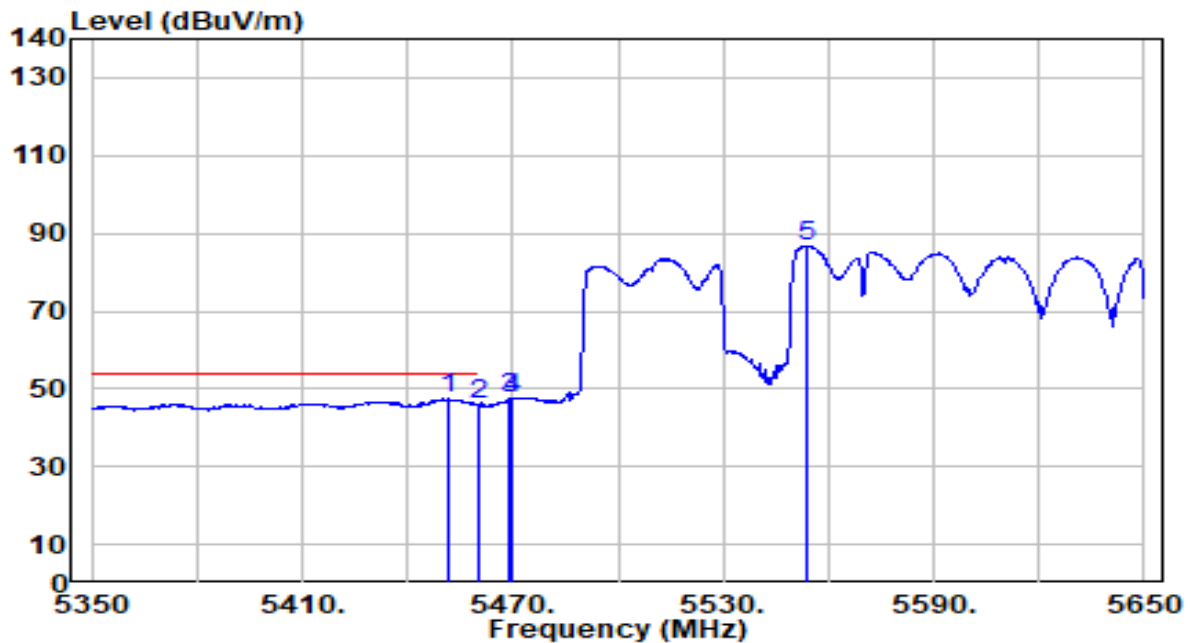


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5452.000	45.31	2.05	47.36	-6.64	54.00	255	84	Average
2		5460.000	43.88	2.07	45.96	-8.04	54.00	255	84	Average
3		5468.800	45.46	2.10	47.56	N/A	N/A	255	84	Average
4		5470.000	45.35	2.11	47.45	N/A	N/A	255	84	Average
5		5554.000	84.23	2.41	86.64	N/A	N/A	255	84	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_996+484+242_20_PUN4_TX_Band3_CH 114_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

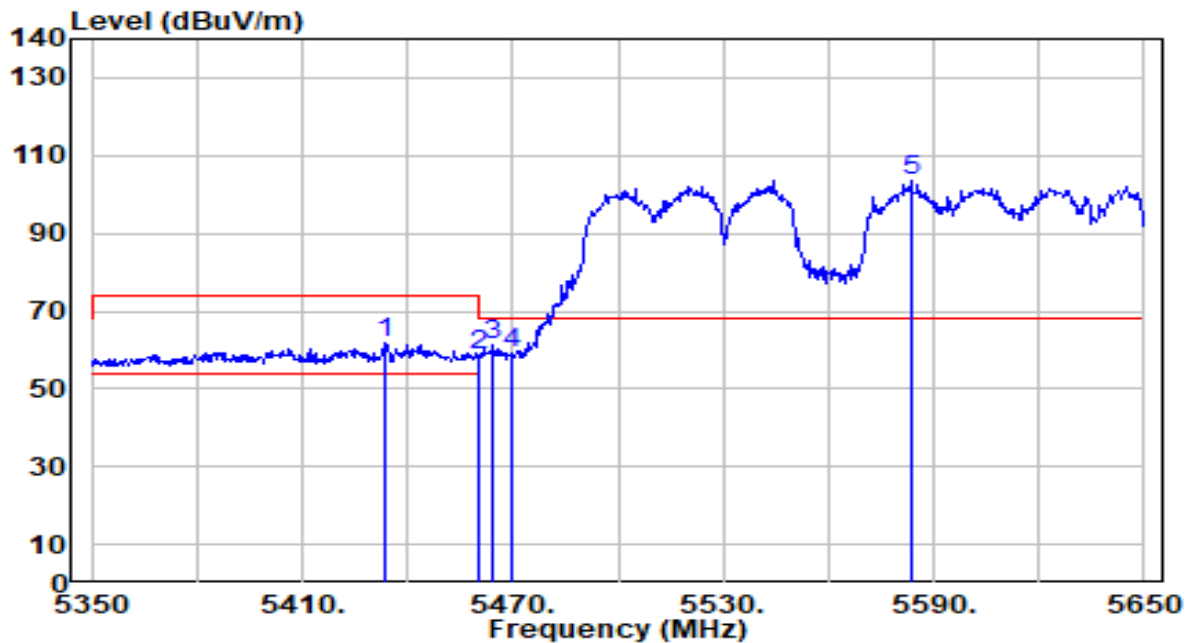


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5433.700	59.90	1.99	61.89	-12.11	74.00	178	346	Peak
2	5460.000	56.41	2.07	58.49	-15.51	74.00	178	346	Peak
3	* 5464.600	59.39	2.09	61.48	-6.72	68.20	178	346	Peak
4	5470.000	57.04	2.11	59.14	-9.06	68.20	178	346	Peak
5	5583.700	100.84	2.53	103.37	N/A	N/A	178	346	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_996+484+242_20_PUN4_TX_Band3_CH 114_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

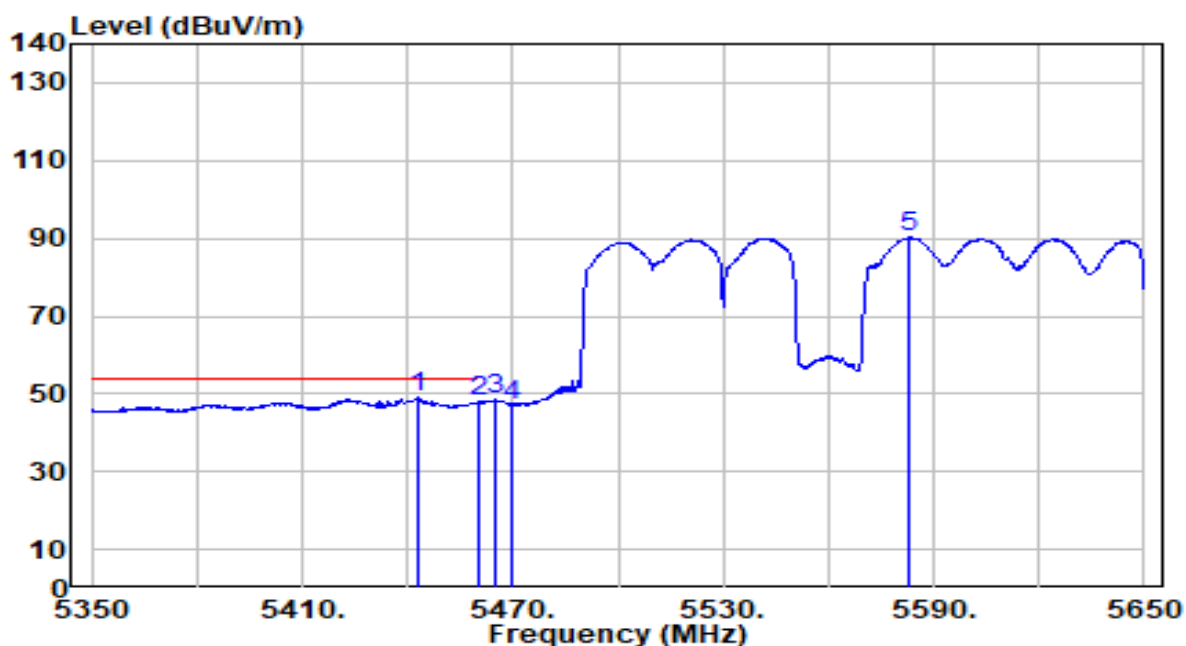


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5443.300	47.01	2.02	49.04	-4.96	54.00	178	346	Average
2		5460.000	46.00	2.07	48.08	-5.92	54.00	178	346	Average
3		5464.900	46.48	2.09	48.57	N/A	N/A	178	346	Average
4		5470.000	45.06	2.11	47.16	N/A	N/A	178	346	Average
5		5583.100	87.72	2.53	90.25	N/A	N/A	178	346	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_996+484+242_20_PUN4_TX_Band3_CH 114_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

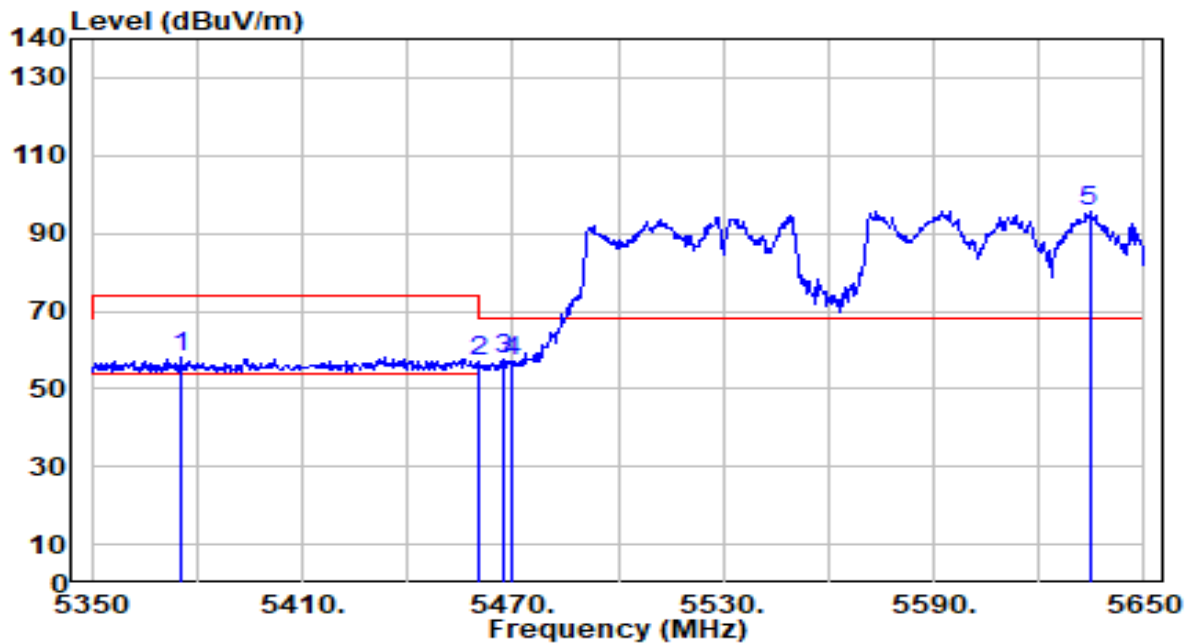


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5375.500	56.35	1.89	58.25	-15.75	74.00	255	84	Peak
2	5460.000	54.91	2.07	56.98	-17.02	74.00	255	84	Peak
3	* 5467.300	55.40	2.10	57.50	-10.70	68.20	255	84	Peak
4	5470.000	55.13	2.11	57.24	-10.96	68.20	255	84	Peak
5	5634.400	93.02	2.77	95.80	N/A	N/A	255	84	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_996+484+242_20_PUN4_TX_Band3_CH 114_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

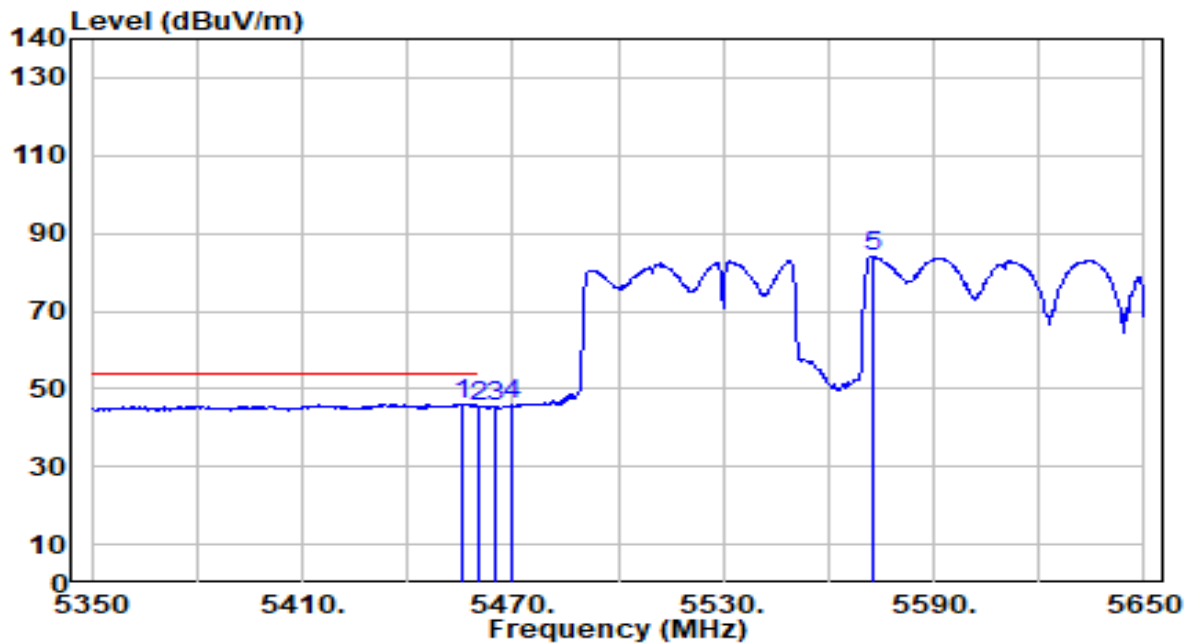


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5455.300	44.00	2.06	46.06	-7.94	54.00	255	84	Average
2		5460.000	43.30	2.07	45.37	-8.63	54.00	255	84	Average
3		5465.200	43.36	2.09	45.45	N/A	N/A	255	84	Average
4		5470.000	43.62	2.11	45.73	N/A	N/A	255	84	Average
5		5572.900	81.51	2.49	84.00	N/A	N/A	255	84	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_996+484+242_20_PUN5_TX_Band3_CH 114_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

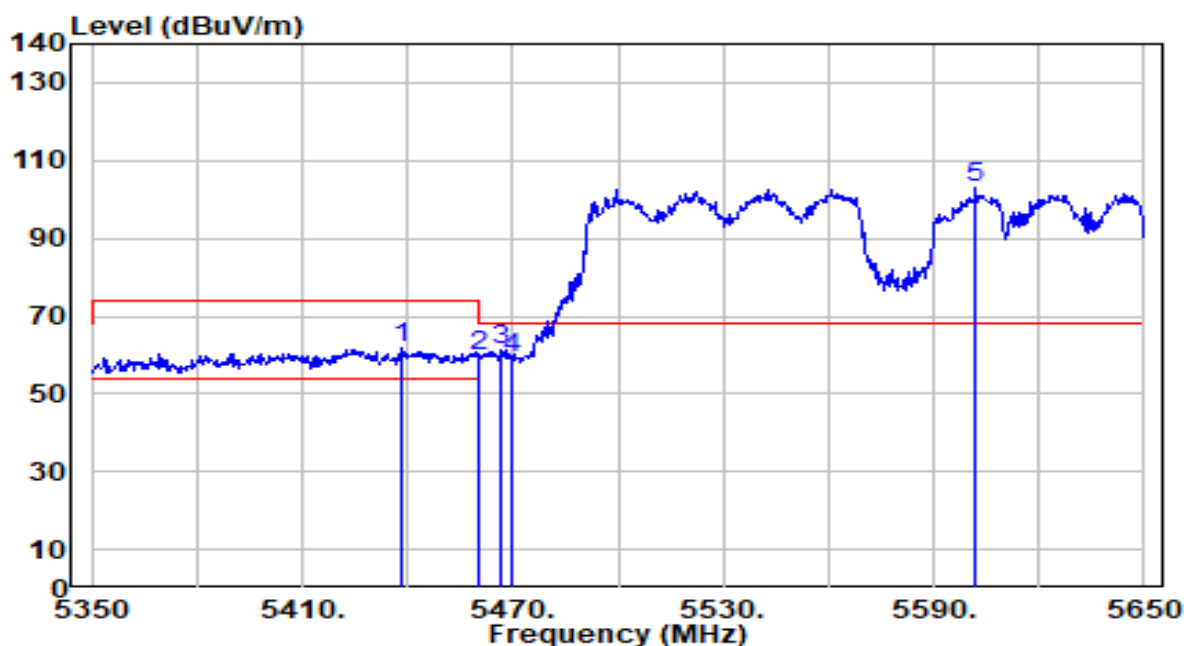


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5438.500	59.56	2.01	61.57	-12.43	74.00	178	346	Peak
2	5460.000	57.39	2.07	59.46	-14.54	74.00	178	346	Peak
3	* 5466.700	59.13	2.10	61.23	-6.97	68.20	178	346	Peak
4	5470.000	57.18	2.11	59.29	-8.91	68.20	178	346	Peak
5	5602.000	100.29	2.60	102.90	N/A	N/A	178	346	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_996+484+242_20_PUN5_TX_Band3_CH 114_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

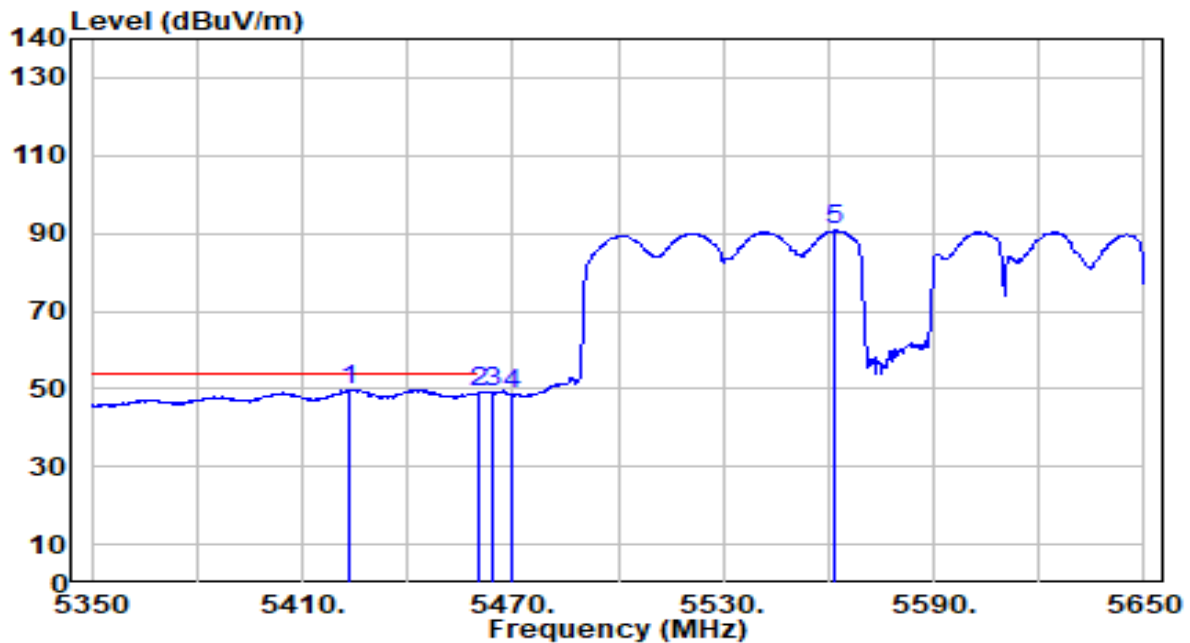


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5423.200	47.71	1.96	49.67	-4.33	54.00	178	346	Average
2		5460.000	46.92	2.07	48.99	-5.01	54.00	178	346	Average
3		5464.600	47.25	2.09	49.34	N/A	N/A	178	346	Average
4		5470.000	46.41	2.11	48.51	N/A	N/A	178	346	Average
5		5561.800	88.23	2.44	90.67	N/A	N/A	178	346	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_996+484+242_20_PUN5_TX_Band3_CH 114_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

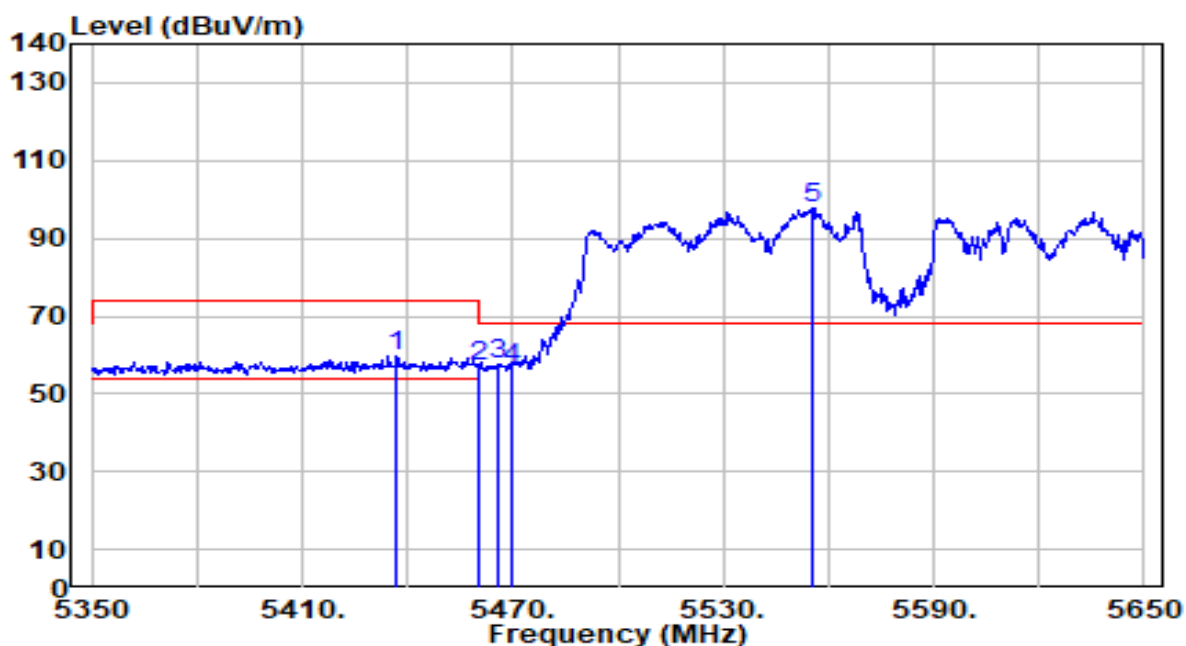


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5437.000	57.75	2.00	59.75	-14.25	74.00	255	84	Peak
2	5460.000	55.24	2.07	57.31	-16.69	74.00	255	84	Peak
3	* 5465.500	55.29	2.09	57.38	-10.82	68.20	255	84	Peak
4	5470.000	54.38	2.11	56.49	-11.71	68.20	255	84	Peak
5	5555.200	95.47	2.42	97.88	N/A	N/A	255	84	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_996+484+242_20_PUN5_TX_Band3_CH 114_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

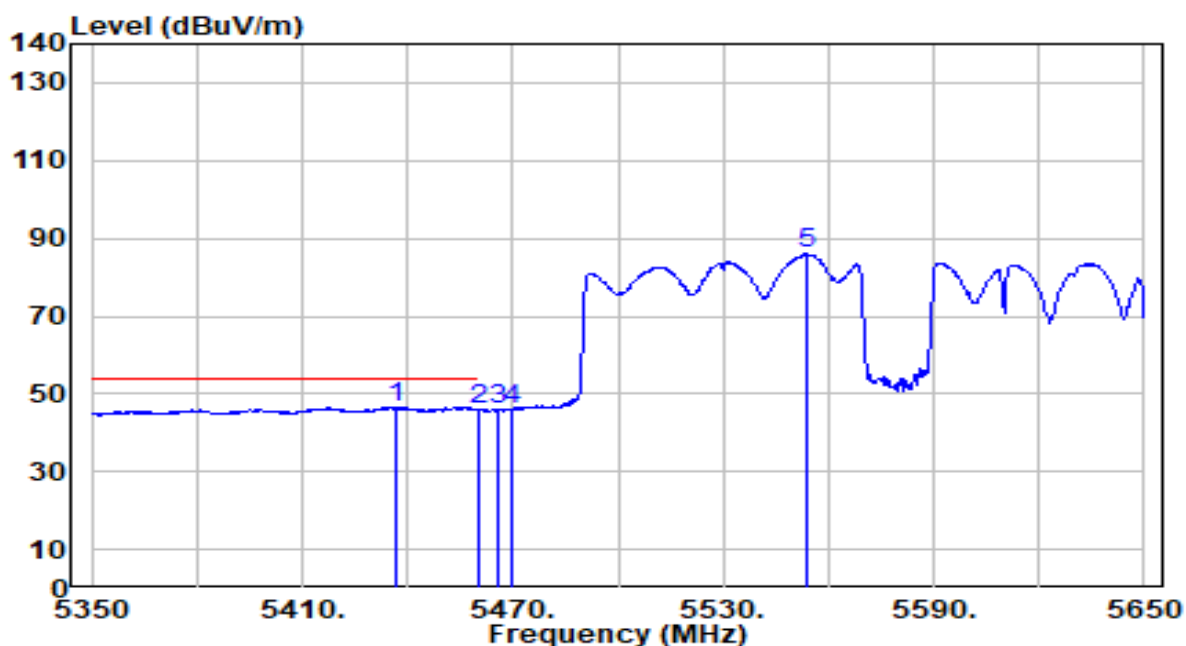


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5436.400	44.57	2.00	46.57	-7.43	54.00	255	84	Average
2		5460.000	43.76	2.07	45.83	-8.17	54.00	255	84	Average
3		5466.100	43.89	2.09	45.98	N/A	N/A	255	84	Average
4		5470.000	43.75	2.11	45.86	N/A	N/A	255	84	Average
5		5533.700	83.60	2.41	86.01	N/A	N/A	255	84	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_996+484+242_20_PUN6_TX_Band3_CH 114_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

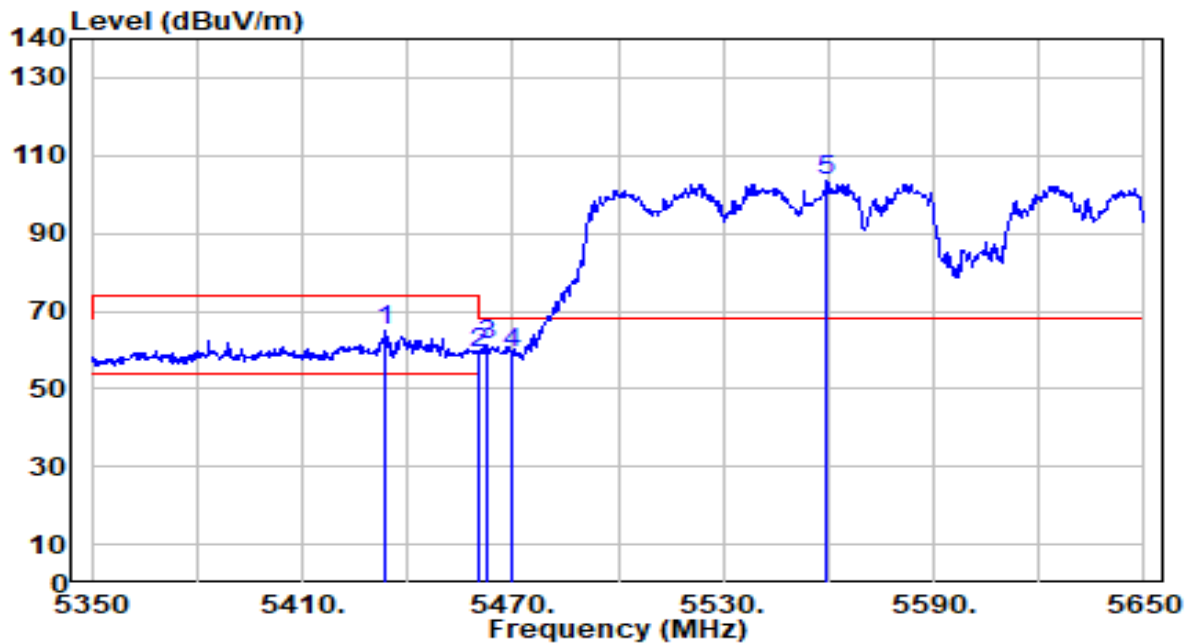


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5433.700	63.09	1.99	65.08	-8.92	74.00	178	346	Peak
2	5460.000	56.94	2.07	59.02	-14.98	74.00	178	346	Peak
3	* 5462.800	59.26	2.08	61.34	-6.86	68.20	178	346	Peak
4	5470.000	57.15	2.11	59.26	-8.94	68.20	178	346	Peak
5	5559.700	100.91	2.44	103.35	N/A	N/A	178	346	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_996+484+242_20_PUN6_TX_Band3_CH 114_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

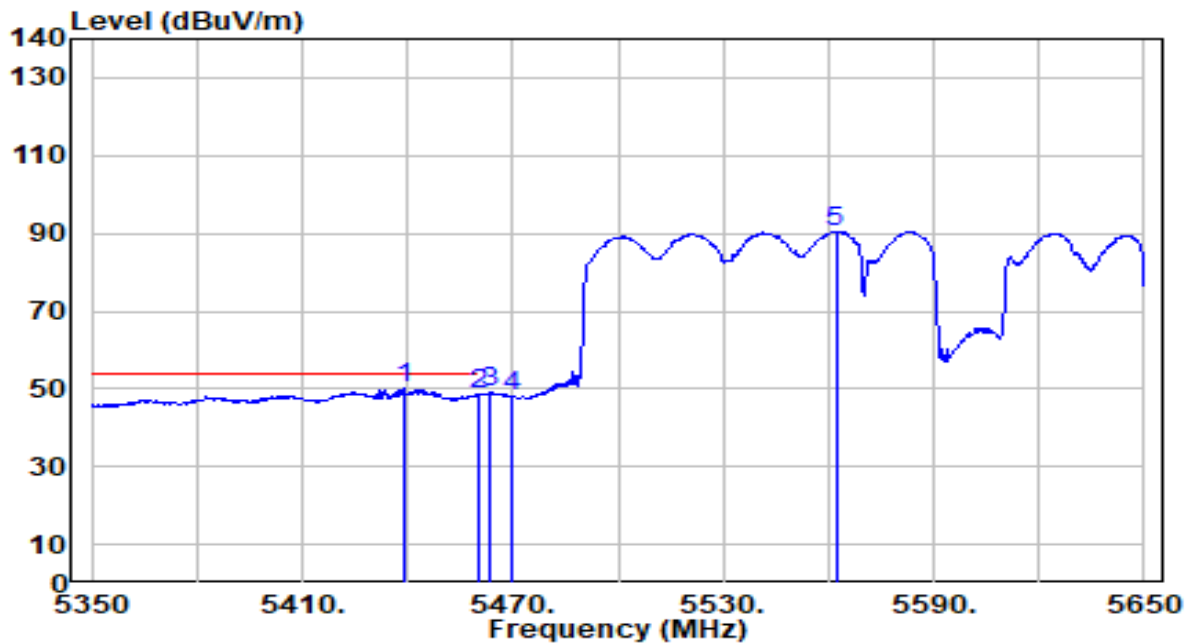


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5438.800	48.14	2.01	50.15	-3.85	54.00	178	346	Average
2		5460.000	46.55	2.07	48.62	-5.38	54.00	178	346	Average
3		5463.100	47.06	2.08	49.15	N/A	N/A	178	346	Average
4		5470.000	45.71	2.11	47.82	N/A	N/A	178	346	Average
5		5562.100	88.01	2.44	90.45	N/A	N/A	178	346	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_996+484+242_20_PUN6_TX_Band3_CH 114_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

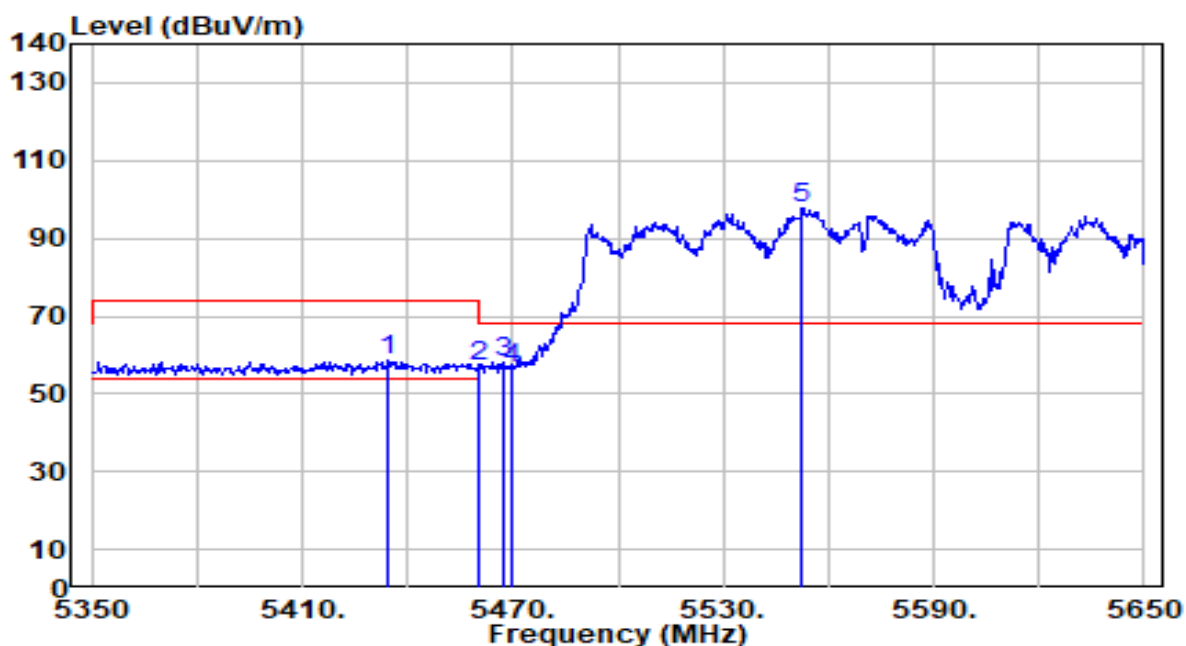


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5434.300	56.63	1.99	58.63	-15.37	74.00	255	84	Peak
2	5460.000	55.08	2.07	57.15	-16.85	74.00	255	84	Peak
3	* 5467.600	55.91	2.10	58.00	-10.20	68.20	255	84	Peak
4	5470.000	54.25	2.11	56.35	-11.85	68.20	255	84	Peak
5	5552.500	95.56	2.41	97.96	N/A	N/A	255	84	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_996+484+242_20_PUN6_TX_Band3_CH 114_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

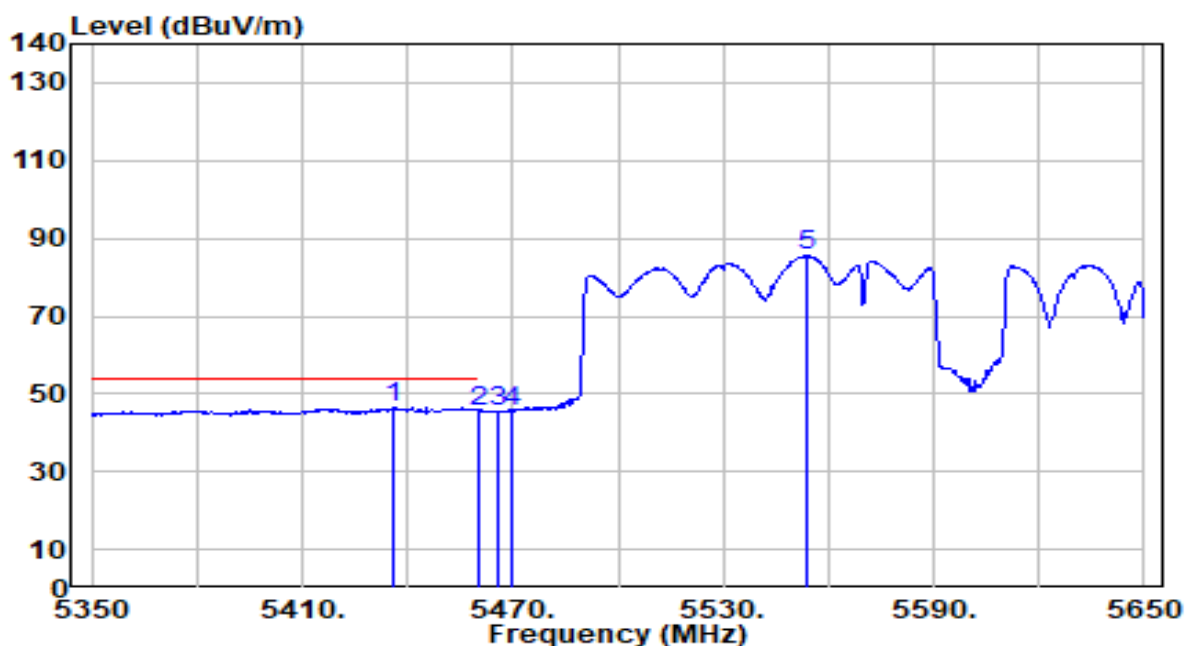


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5436.100	44.66	2.00	46.66	-7.34	54.00	255	84	Average
2		5460.000	43.40	2.07	45.47	-8.53	54.00	255	84	Average
3		5465.500	43.58	2.09	45.67	N/A	N/A	255	84	Average
4		5470.000	43.28	2.11	45.38	N/A	N/A	255	84	Average
5		5553.700	83.14	2.41	85.55	N/A	N/A	255	84	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_996+484+242_20_PUN7_TX_Band3_CH 114_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

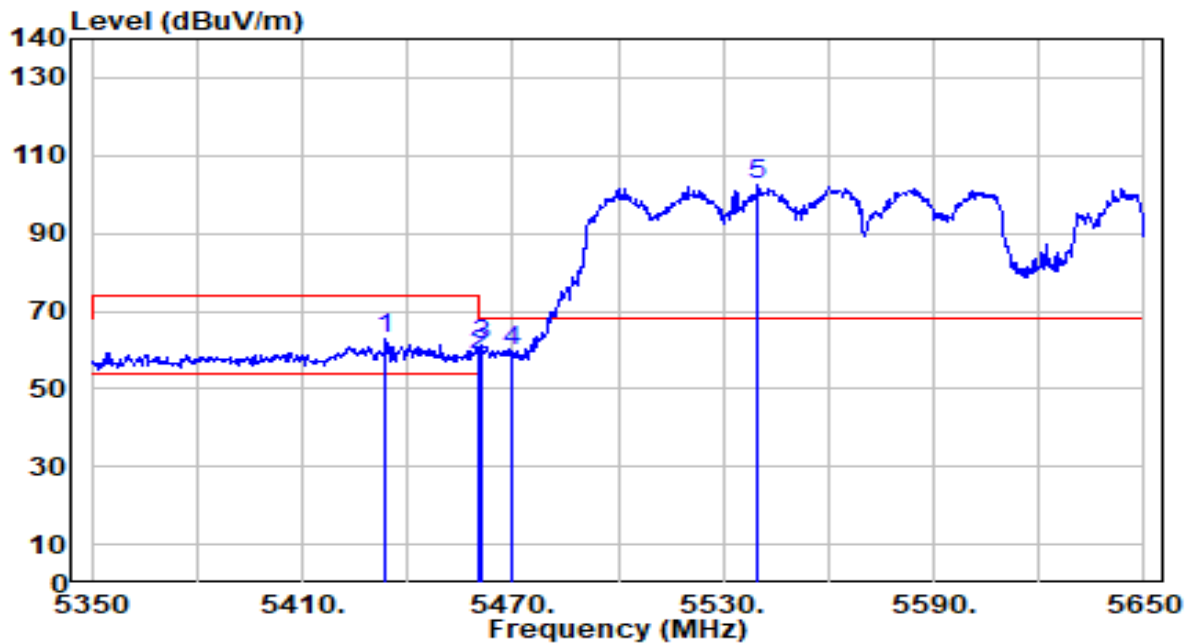


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5433.700	60.62	1.99	62.61	-11.39	74.00	178	346	Peak
2	5460.000	56.57	2.07	58.64	-15.36	74.00	178	346	Peak
3	* 5461.000	59.11	2.08	61.19	-7.01	68.20	178	346	Peak
4	5470.000	57.33	2.11	59.44	-8.76	68.20	178	346	Peak
5	5539.900	100.40	2.36	102.75	N/A	N/A	178	346	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_996+484+242_20_PUN7_TX_Band3_CH 114_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

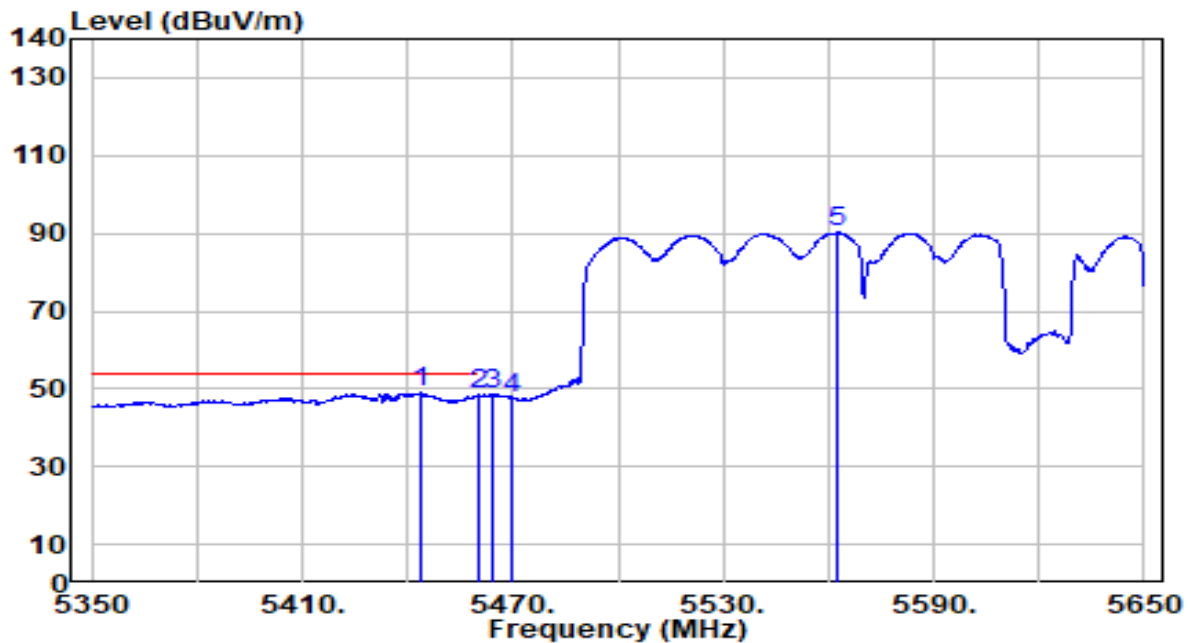


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5443.600	47.10	2.02	49.12	-4.88	54.00	178	346	Average
2		5460.000	46.28	2.07	48.35	-5.65	54.00	178	346	Average
3		5464.600	46.53	2.09	48.62	N/A	N/A	178	346	Average
4		5470.000	45.45	2.11	47.55	N/A	N/A	178	346	Average
5		5562.400	87.76	2.45	90.21	N/A	N/A	178	346	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_996+484+242_20_PUN7_TX_Band3_CH 114_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

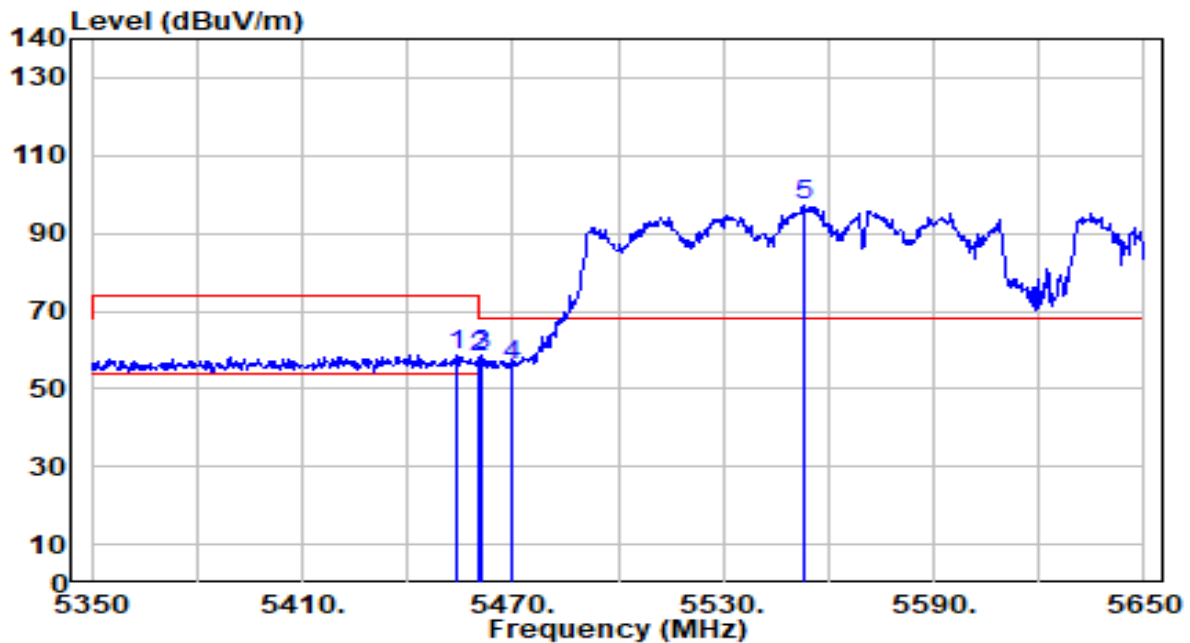


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5454.100	56.68	2.06	58.73	-15.27	74.00	255	84	Peak
2	5460.000	56.10	2.07	58.17	-15.83	74.00	255	84	Peak
3	* 5461.300	56.51	2.08	58.59	-9.61	68.20	255	84	Peak
4	5470.000	53.73	2.11	55.83	-12.37	68.20	255	84	Peak
5	5553.400	94.92	2.41	97.33	N/A	N/A	255	84	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_996+484+242_20_PUN7_TX_Band3_CH 114_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

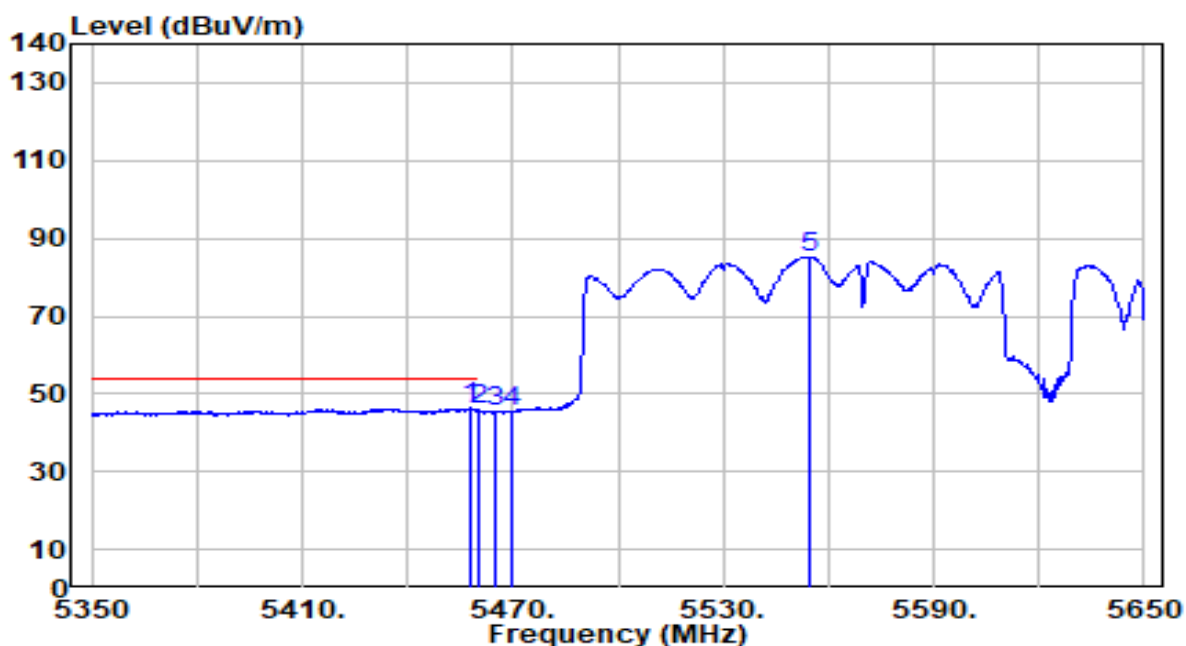


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5458.000	44.18	2.07	46.25	-7.75	54.00	255	84	Average
2		5460.000	43.65	2.07	45.72	-8.28	54.00	255	84	Average
3		5465.200	43.43	2.09	45.52	N/A	N/A	255	84	Average
4		5470.000	43.12	2.11	45.22	N/A	N/A	255	84	Average
5		5554.600	82.82	2.42	85.24	N/A	N/A	255	84	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_996+484+242_20_PUN8_TX_Band3_CH 114_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

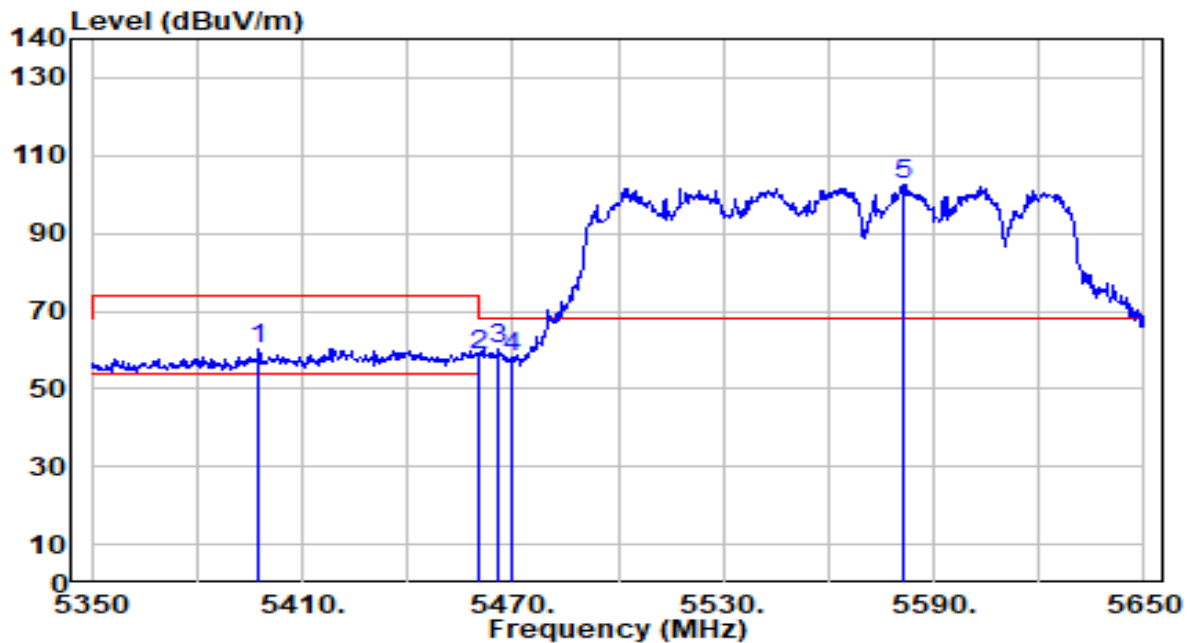


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5397.700	58.30	1.89	60.18	-13.82	74.00	178	346	Peak
2	5460.000	56.72	2.07	58.79	-15.21	74.00	178	346	Peak
3	* 5466.100	58.36	2.09	60.46	-7.74	68.20	178	346	Peak
4	5470.000	55.82	2.11	57.93	-10.27	68.20	178	346	Peak
5	5581.000	100.20	2.52	102.72	N/A	N/A	178	346	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_996+484+242_20_PUN8_TX_Band3_CH 114_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

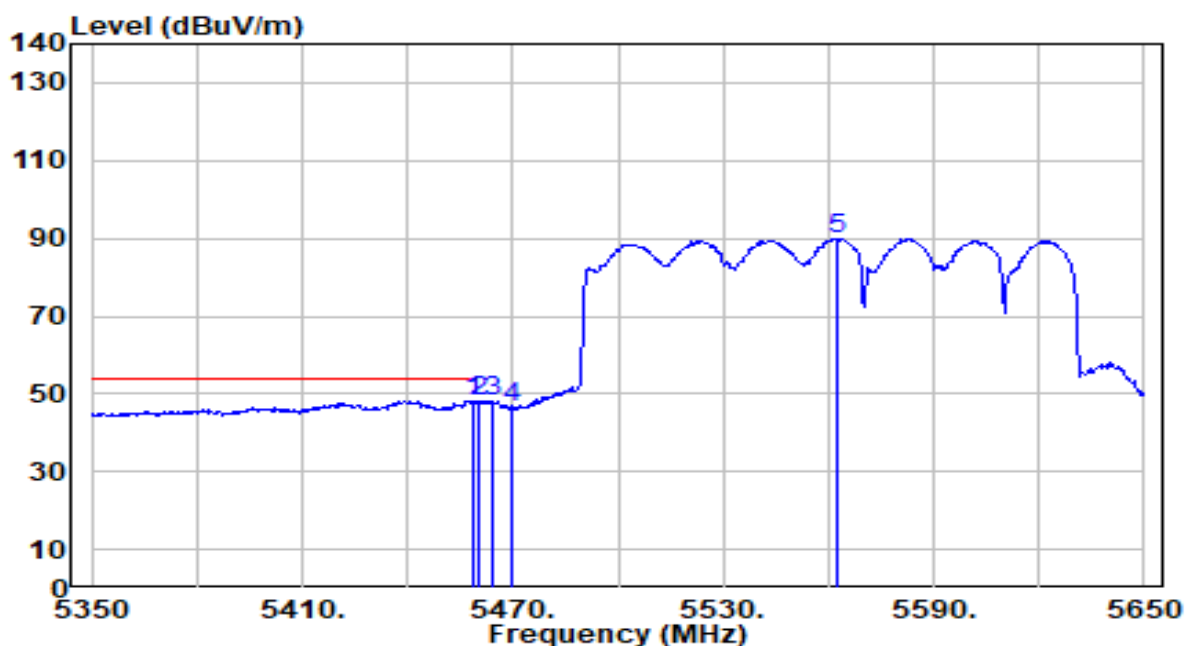


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5458.900	46.19	2.07	48.26	-5.74	54.00	178	346	Average
2		5460.000	45.75	2.07	47.83	-6.17	54.00	178	346	Average
3		5464.300	46.22	2.09	48.31	N/A	N/A	178	346	Average
4		5470.000	44.13	2.11	46.24	N/A	N/A	178	346	Average
5		5562.400	87.43	2.45	89.88	N/A	N/A	178	346	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_996+484+242_20_PUN8_TX_Band3_CH 114_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

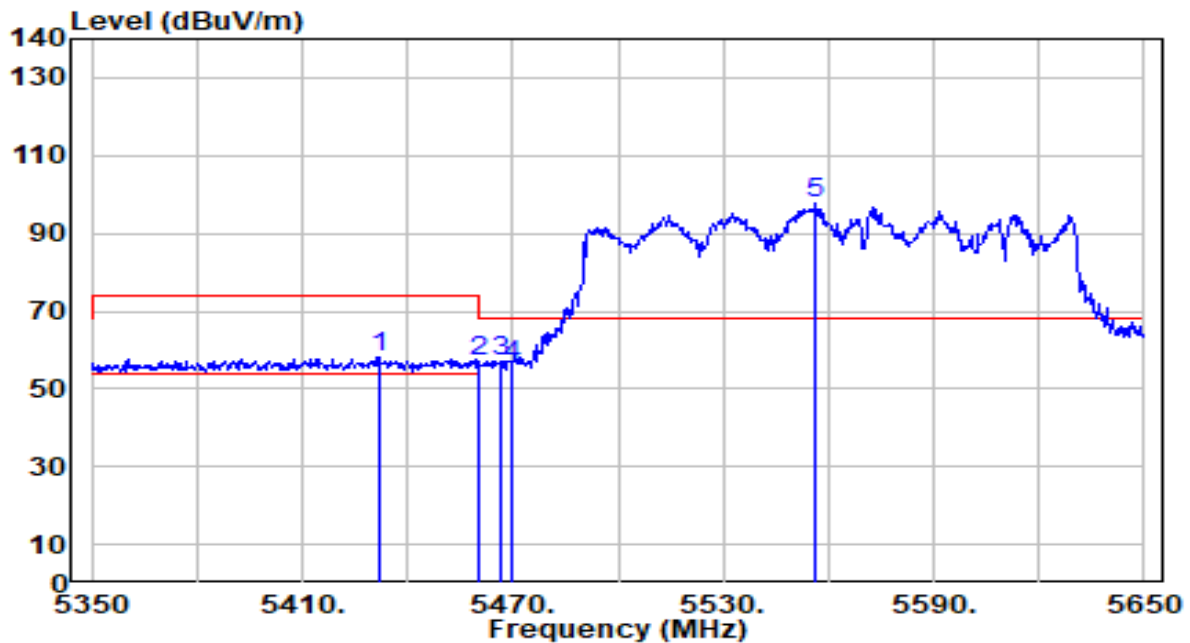


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5431.900	56.29	1.99	58.27	-15.73	74.00	255	84	Peak
2	5460.000	54.81	2.07	56.88	-17.12	74.00	255	84	Peak
3	* 5466.400	55.08	2.09	57.18	-11.02	68.20	255	84	Peak
4	5470.000	54.04	2.11	56.15	-12.05	68.20	255	84	Peak
5	5556.400	95.18	2.42	97.61	N/A	N/A	255	84	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_996+484+242_20_PUN8_TX_Band3_CH 114_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

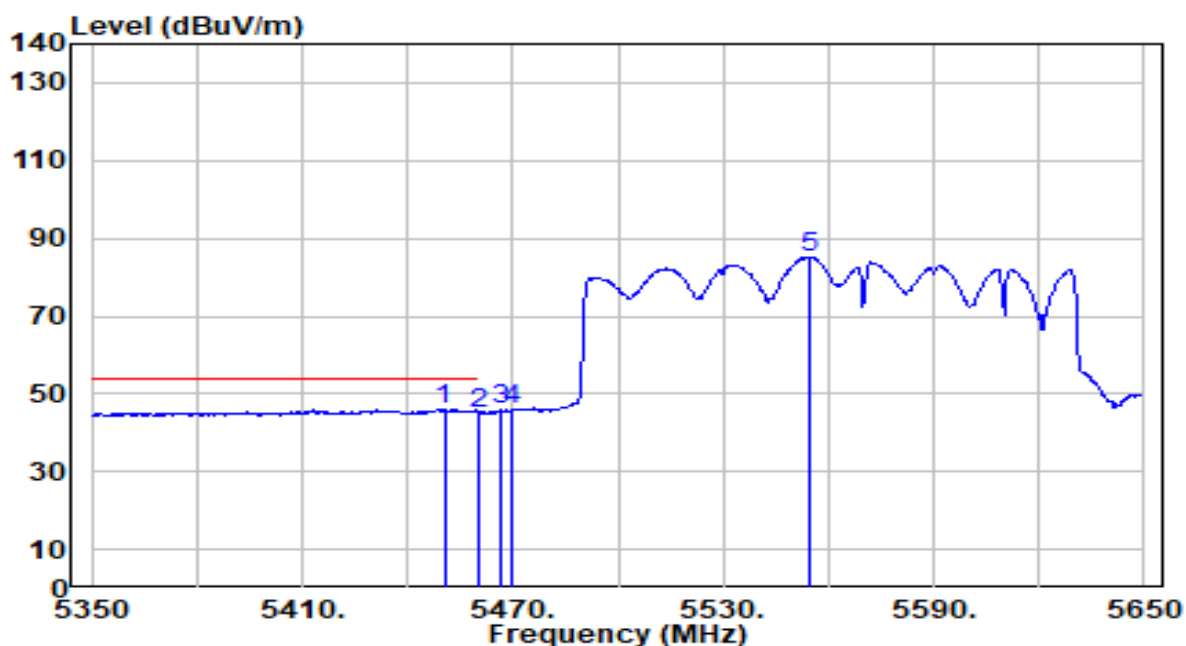


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5450.500	43.96	2.04	46.00	-8.00	54.00	255	84	Average
2		5460.000	43.07	2.07	45.14	-8.86	54.00	255	84	Average
3		5466.700	43.66	2.10	45.76	N/A	N/A	255	84	Average
4		5470.000	43.82	2.11	45.93	N/A	N/A	255	84	Average
5		5554.300	82.85	2.41	85.26	N/A	N/A	255	84	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

HBS

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1	Test Voltage	By Notebook PC

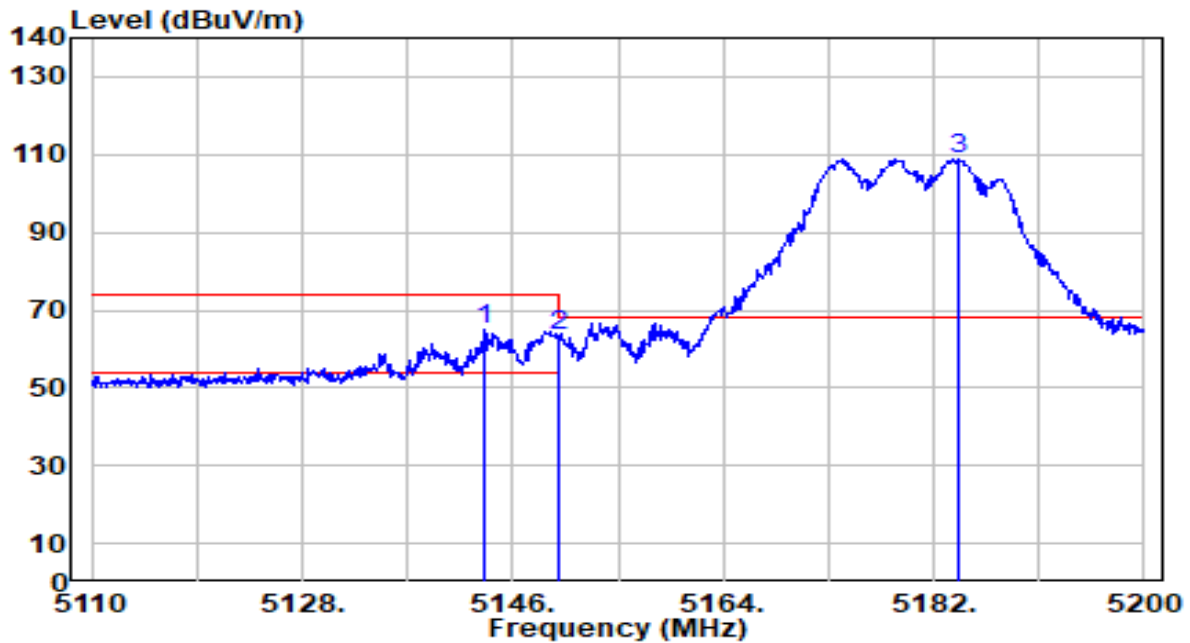


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5143.570	62.83	1.93	64.77	-9.23	74.00	187	110	Peak
2		5150.000	61.70	1.94	63.64	-10.36	74.00	187	110	Peak
3		5184.070	106.99	1.96	108.95	N/A	N/A	187	110	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1	Test Voltage	By Notebook PC

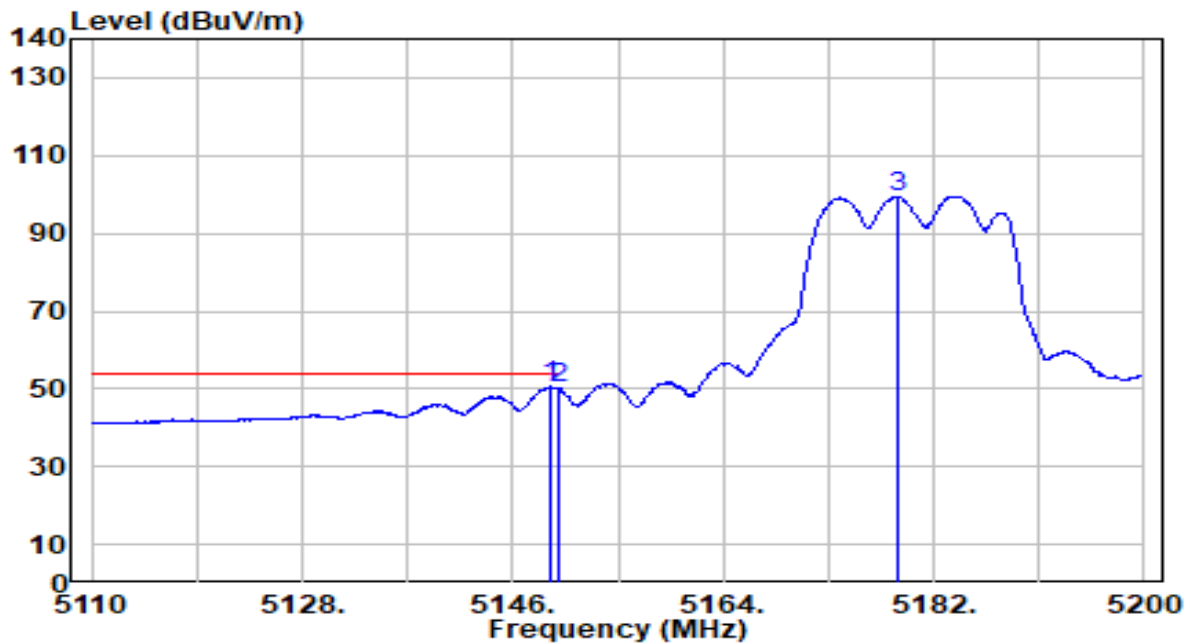


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.240	48.96	1.94	50.90	-3.10	54.00	187	110	Average
2		5150.000	48.39	1.94	50.33	-3.67	54.00	187	110	Average
3		5178.940	97.55	1.95	99.50	N/A	N/A	187	110	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1	Test Voltage	By Notebook PC

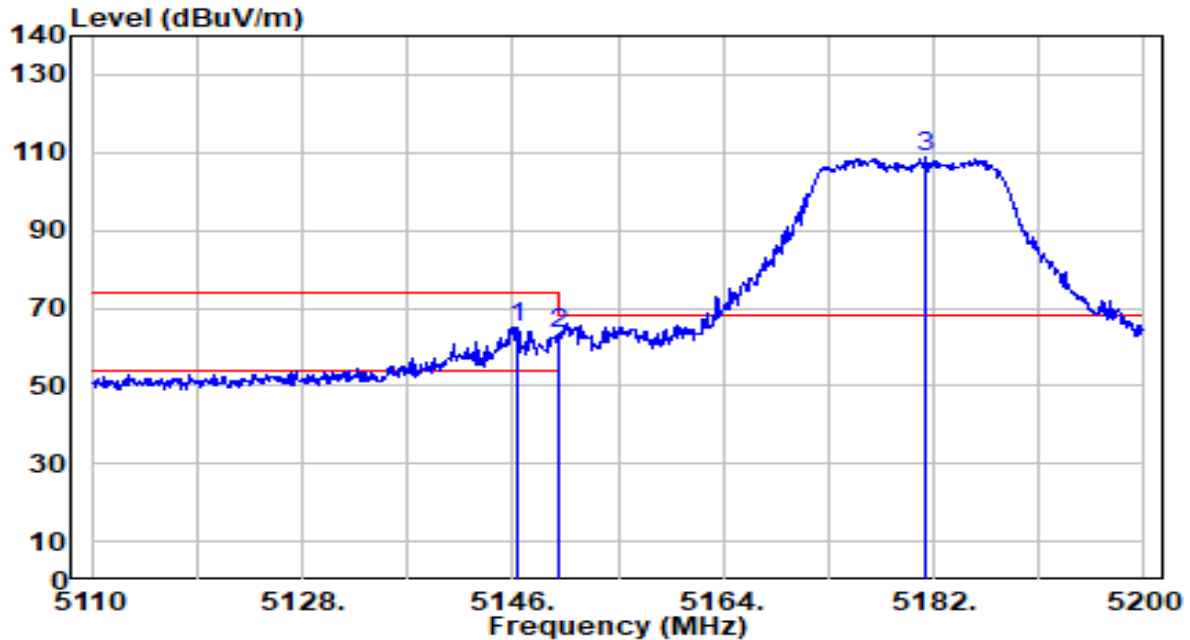


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5146.360	62.92	1.93	64.85	-9.15	74.00	324	60	Peak
2		5150.000	61.31	1.94	63.25	-10.75	74.00	324	60	Peak
3		5181.280	106.80	1.96	108.76	N/A	N/A	324	60	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1	Test Voltage	By Notebook PC

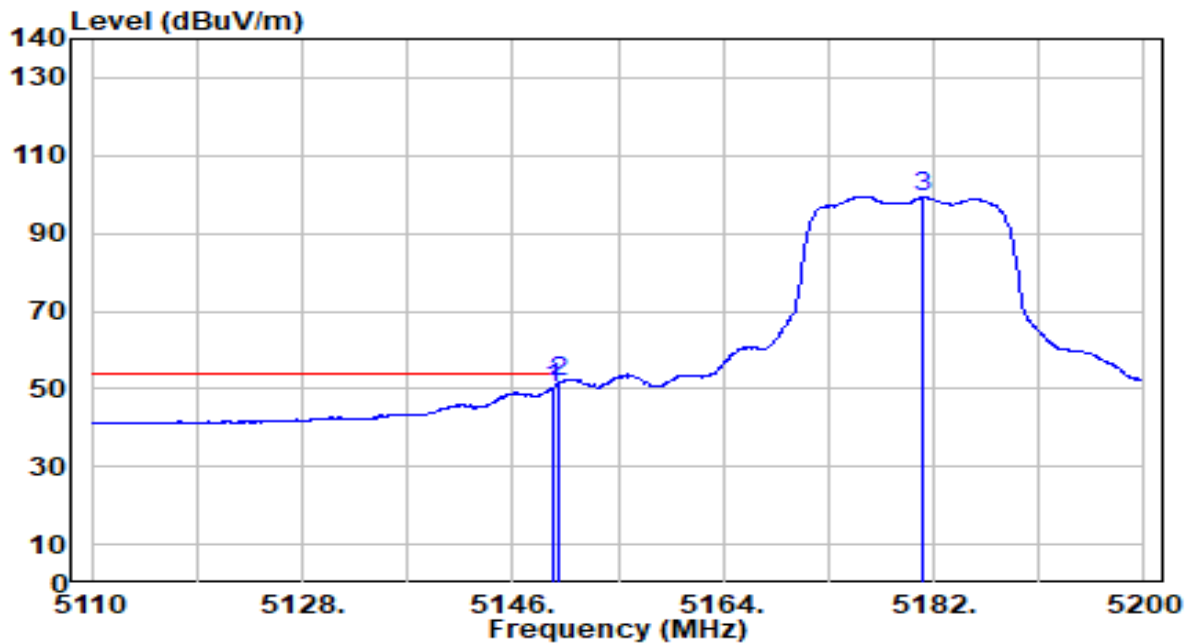


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5149.420	48.29	1.94	50.22	-3.78	54.00	324	60	Average
2	*	5150.000	49.68	1.94	51.61	-2.39	54.00	324	60	Average
3		5181.010	97.44	1.96	99.40	N/A	N/A	324	60	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1	Test Voltage	By Notebook PC

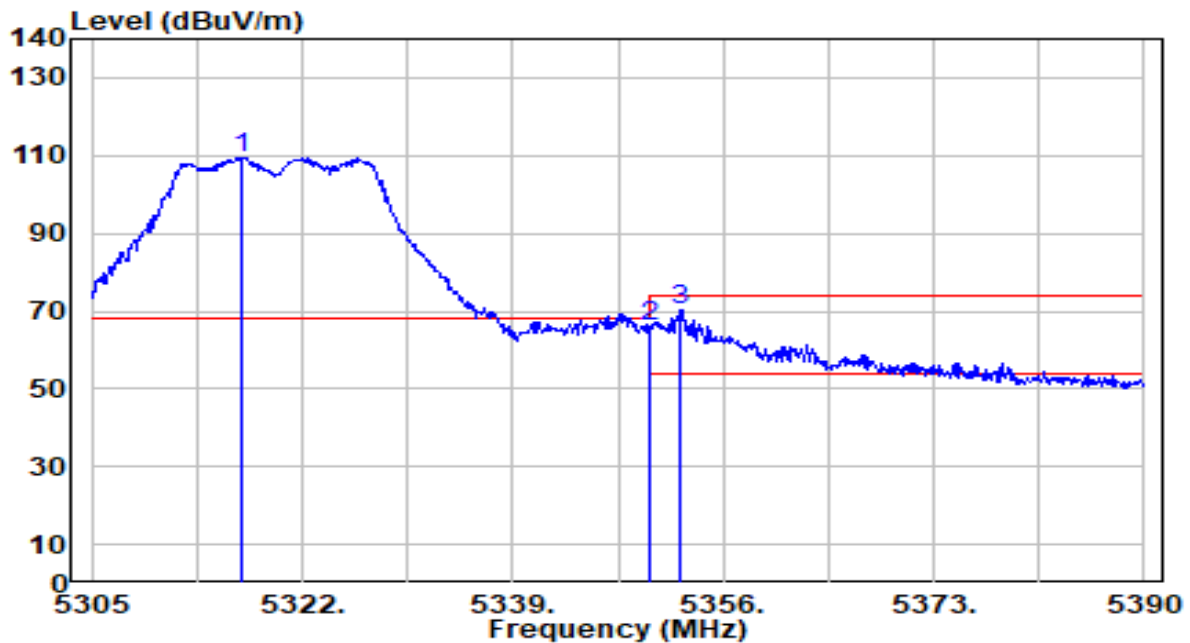


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5317.155	107.47	1.92	109.38	N/A	N/A	109	360	Peak
2	5350.000	64.07	1.90	65.98	-8.02	74.00	109	360	Peak
3	* 5352.430	68.58	1.90	70.48	-3.52	74.00	109	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1	Test Voltage	By Notebook PC

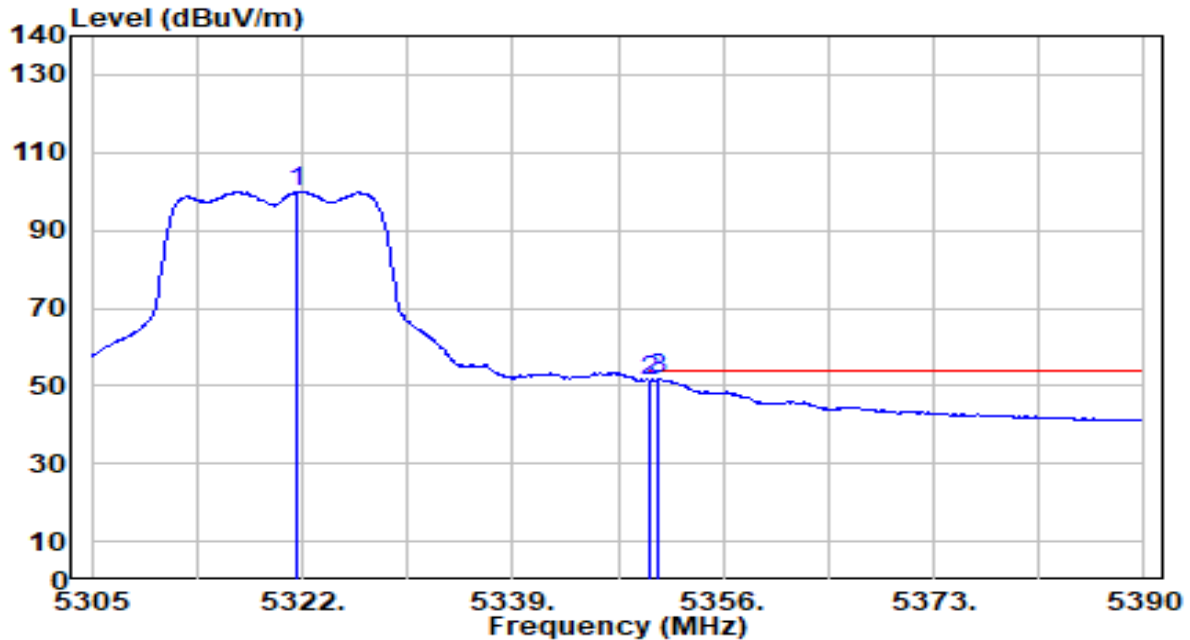


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5321.575	97.97	1.91	99.88	N/A	N/A	109	360	Average
2	5350.000	49.43	1.90	51.34	-2.66	54.00	109	360	Average
3	* 5350.815	49.72	1.90	51.62	-2.38	54.00	109	360	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1	Test Voltage	By Notebook PC

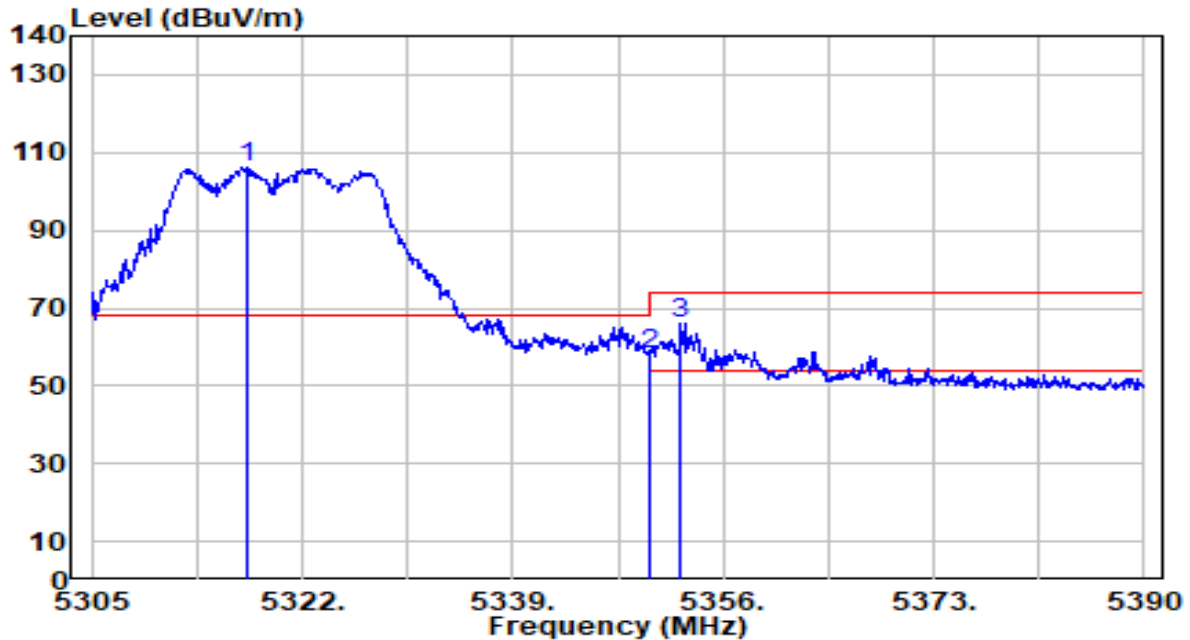


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5317.580	104.42	1.92	106.34	N/A	N/A	119	270	Peak
2	5350.000	56.28	1.90	58.19	-15.81	74.00	119	270	Peak
3	* 5352.515	64.14	1.90	66.04	-7.96	74.00	119	270	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1	Test Voltage	By Notebook PC

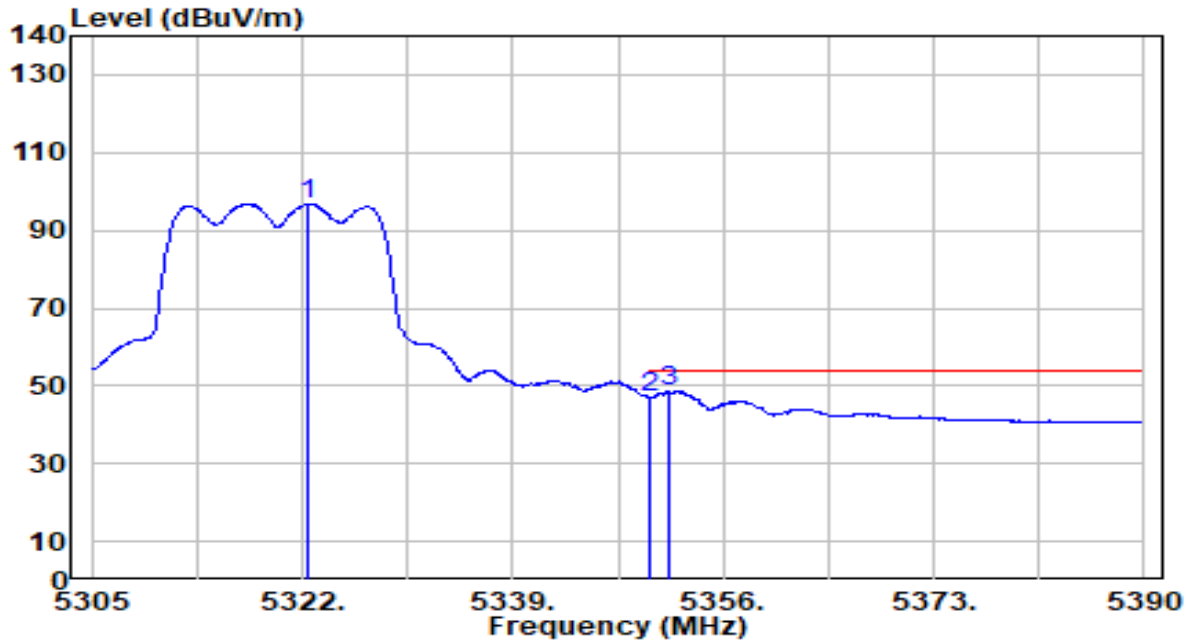


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5322.425	94.91	1.91	96.82	N/A	N/A	119	270	Average
2	5350.000	45.19	1.90	47.10	-6.90	54.00	119	270	Average
3	* 5351.580	46.93	1.90	48.83	-5.17	54.00	119	270	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	By Notebook PC

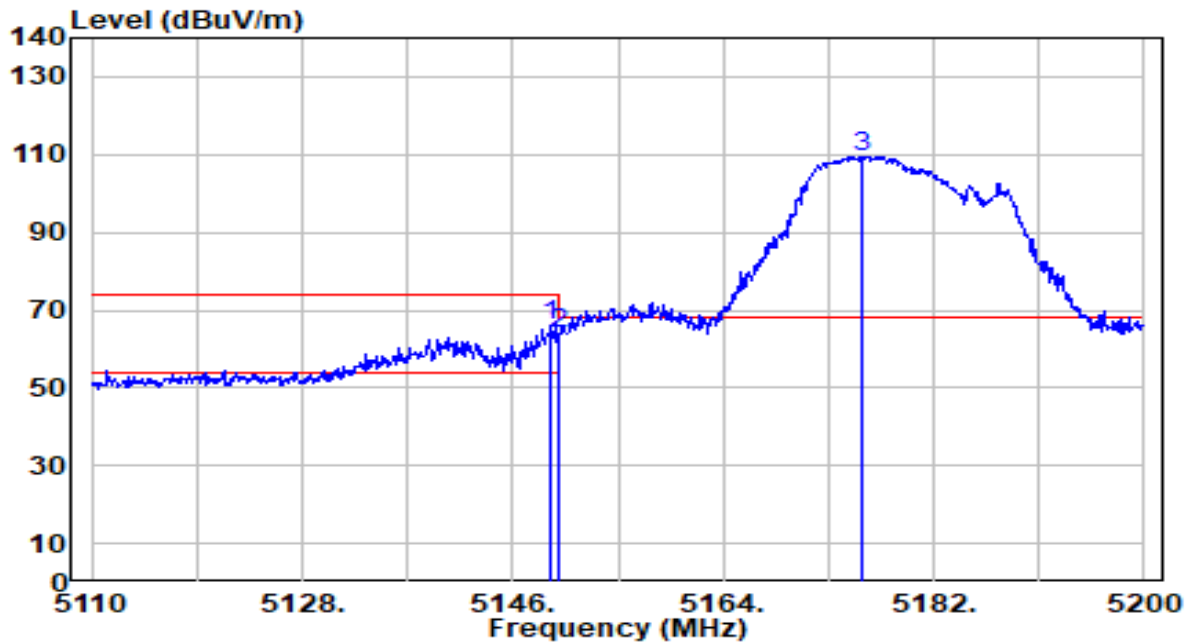


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.330	64.36	1.94	66.30	-7.70	74.00	187	110	Peak
2		5150.000	62.18	1.94	64.11	-9.89	74.00	187	110	Peak
3		5175.880	107.62	1.95	109.57	N/A	N/A	187	110	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	By Notebook PC

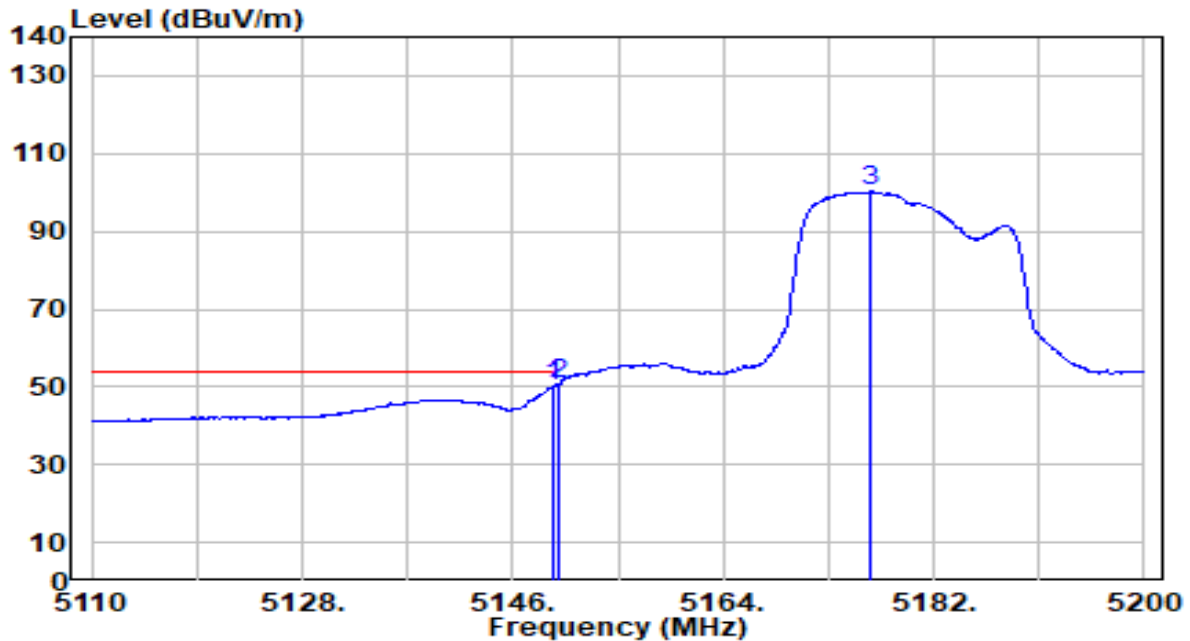


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5149.420	48.16	1.94	50.10	-3.90	54.00	187	110	Average
2	*	5150.000	48.95	1.94	50.89	-3.11	54.00	187	110	Average
3		5176.690	98.18	1.95	100.13	N/A	N/A	187	110	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	By Notebook PC

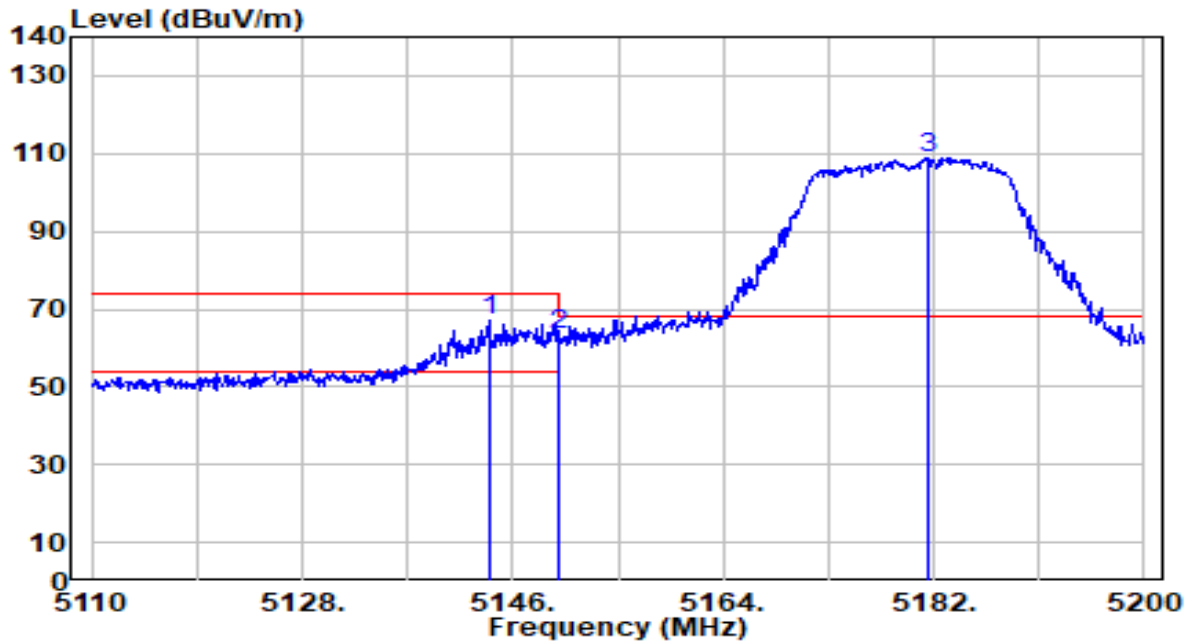


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5143.930	65.26	1.93	67.20	-6.80	74.00	324	60	Peak
2		5150.000	61.68	1.94	63.62	-10.38	74.00	324	60	Peak
3		5181.460	106.89	1.96	108.85	N/A	N/A	324	60	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	By Notebook PC

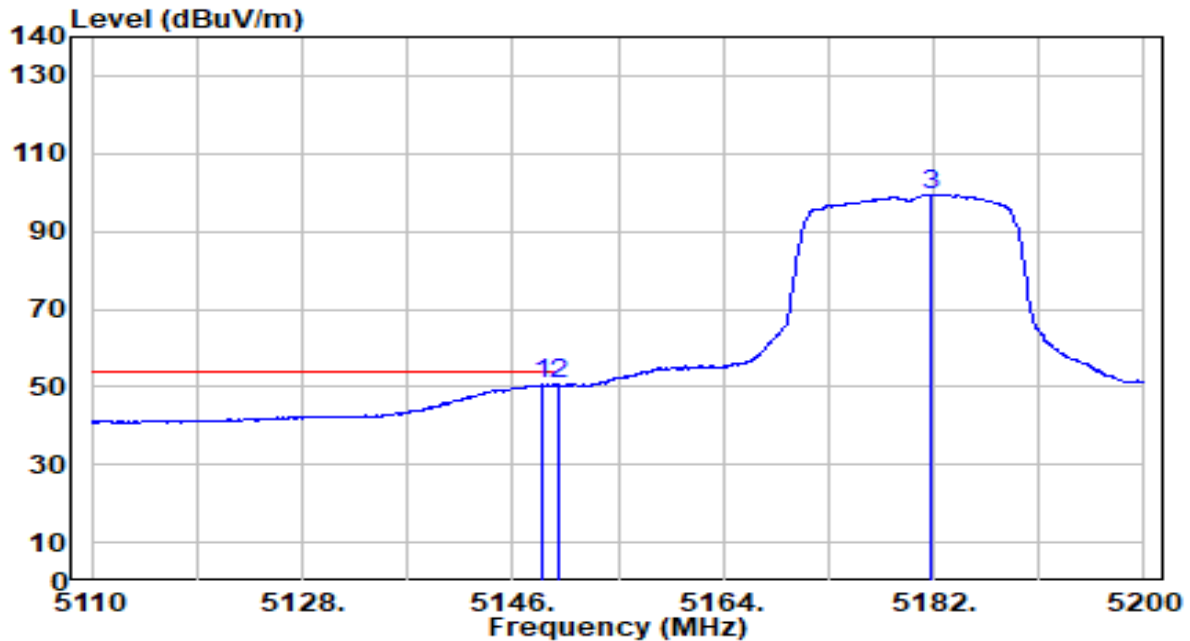


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.430	48.73	1.93	50.66	-3.34	54.00	324	60	Average
2		5150.000	48.66	1.94	50.59	-3.41	54.00	324	60	Average
3		5181.730	97.48	1.96	99.44	N/A	N/A	324	60	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	By Notebook PC

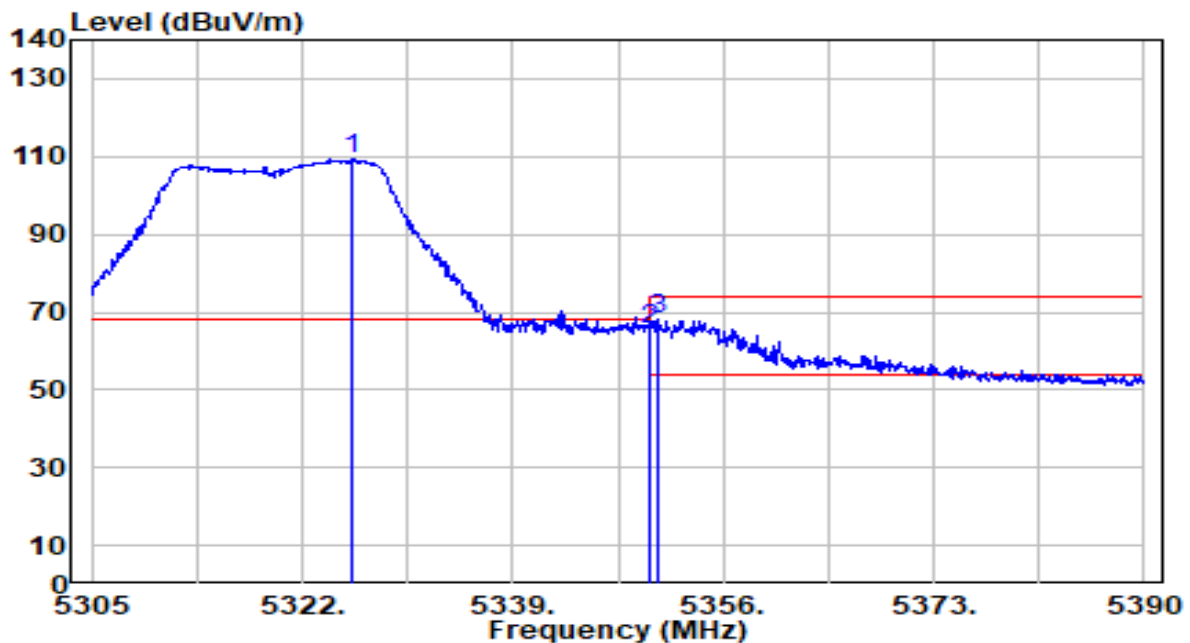


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5326.080	107.24	1.91	109.16	N/A	N/A	109	360	Peak
2	5350.000	63.68	1.90	65.58	-8.42	74.00	109	360	Peak
3	* 5350.815	66.30	1.90	68.20	-5.80	74.00	109	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	By Notebook PC

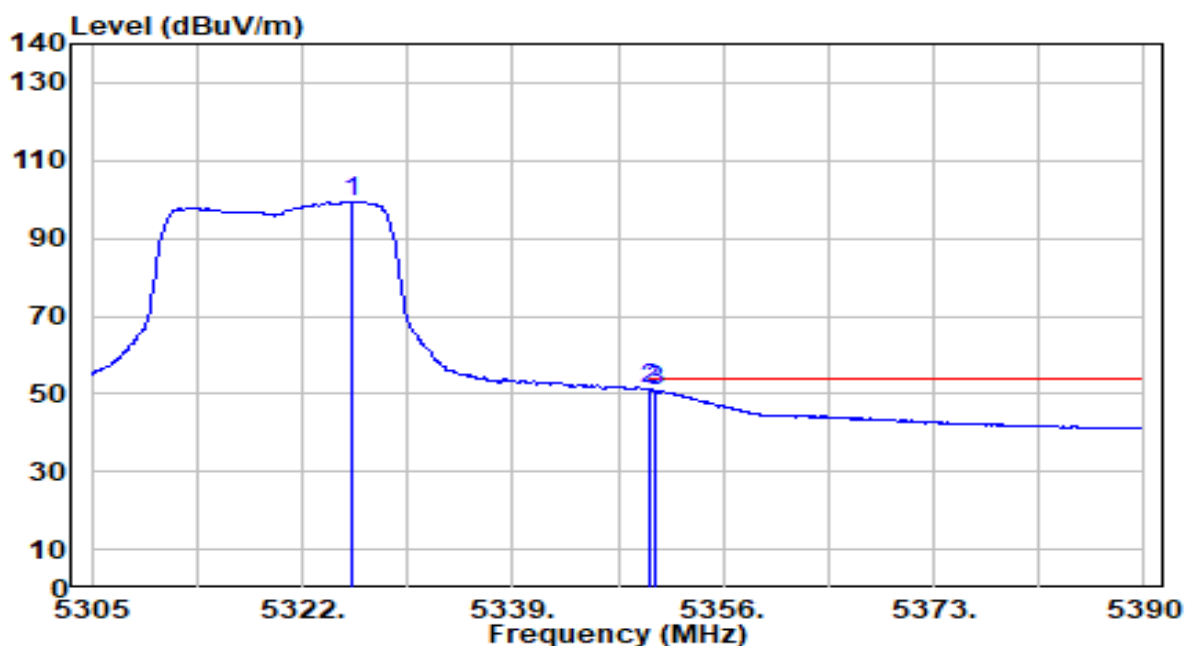


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5325.995	97.61	1.91	99.52	N/A	N/A	109	360	Average
2	*	5350.000	49.40	1.90	51.30	-2.70	54.00	109	360	Average
3		5350.560	48.75	1.90	50.65	-3.35	54.00	109	360	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	By Notebook PC

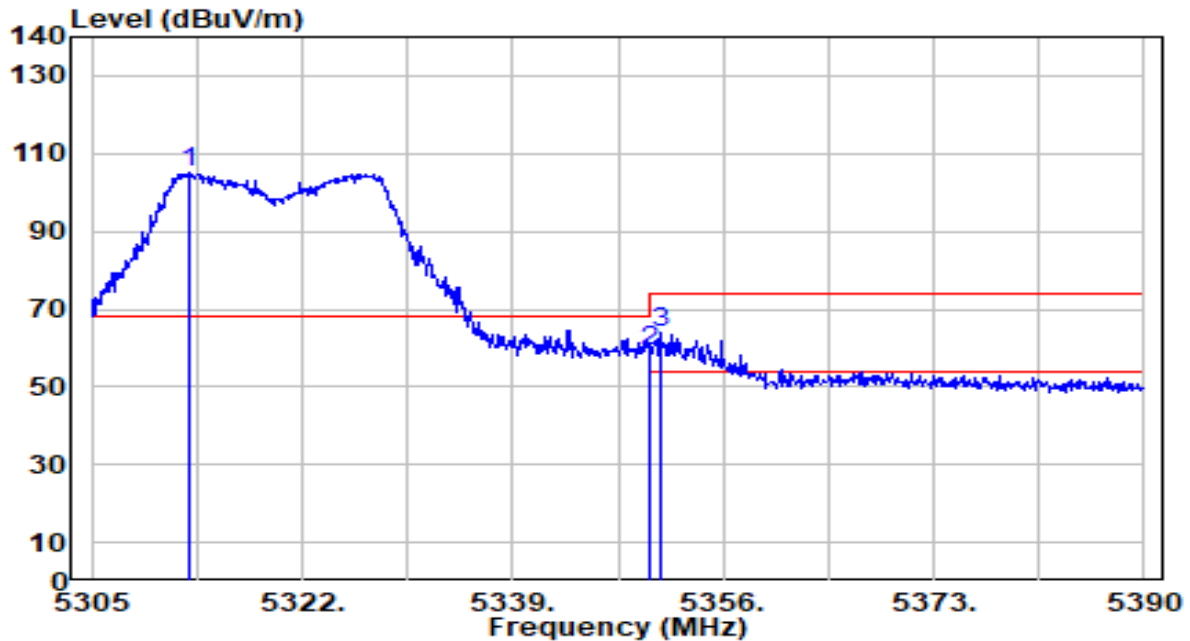


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5312.905	103.04	1.92	104.96	N/A	N/A	119	270	Peak
2	5350.000	57.21	1.90	59.11	-14.89	74.00	119	270	Peak
3	* 5350.900	61.78	1.90	63.68	-10.32	74.00	119	270	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	By Notebook PC

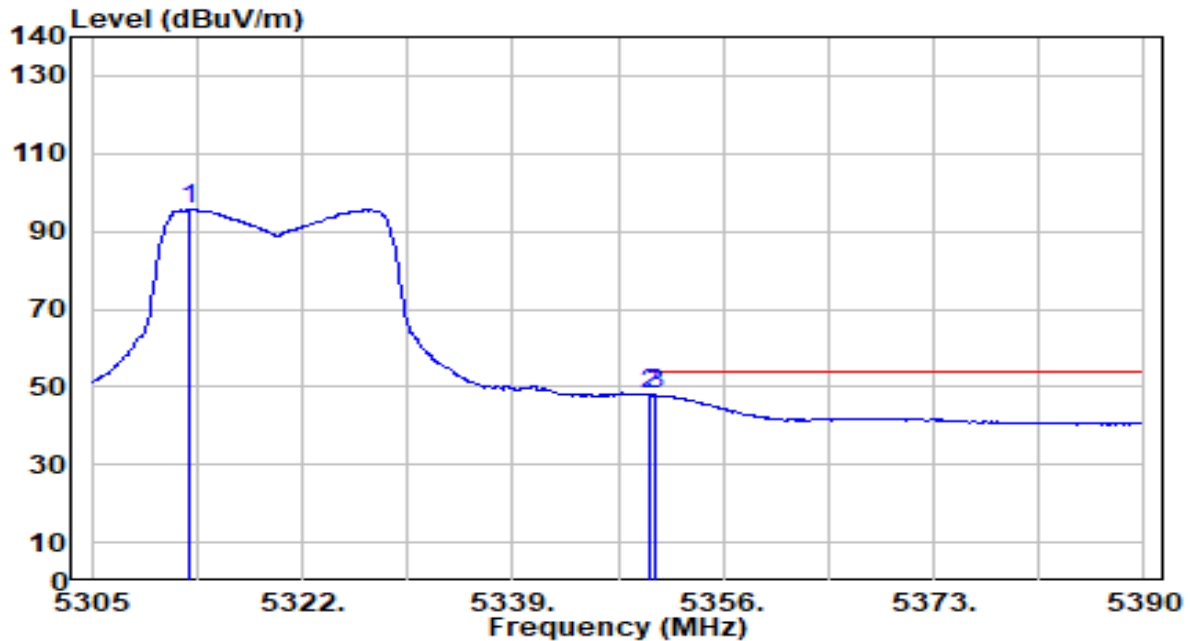


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5312.820	93.69	1.92	95.60	N/A	N/A	119	270	Average
2	* 5350.000	46.04	1.90	47.95	-6.05	54.00	119	270	Average
3	5350.560	46.03	1.90	47.93	-6.07	54.00	119	270	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	By Notebook PC

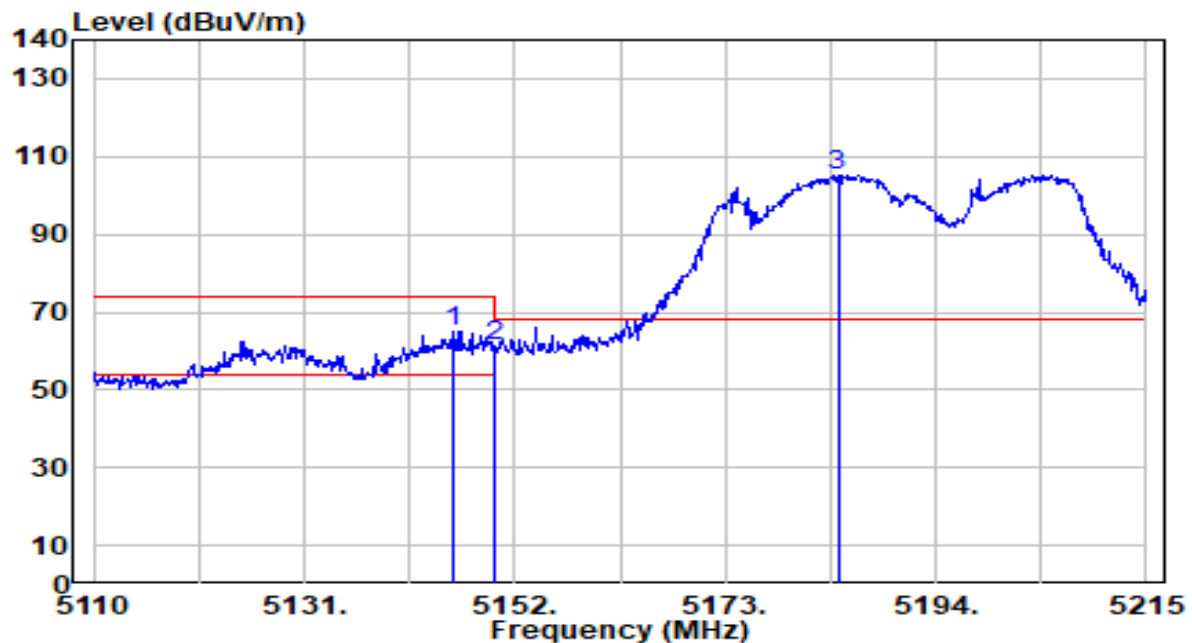


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5145.805	63.17	1.93	65.10	-8.90	74.00	187	110	Peak
2		5150.000	59.26	1.94	61.20	-12.80	74.00	187	110	Peak
3		5184.235	103.14	1.96	105.10	N/A	N/A	187	110	Peak

Note:

1. " * ", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	By Notebook PC

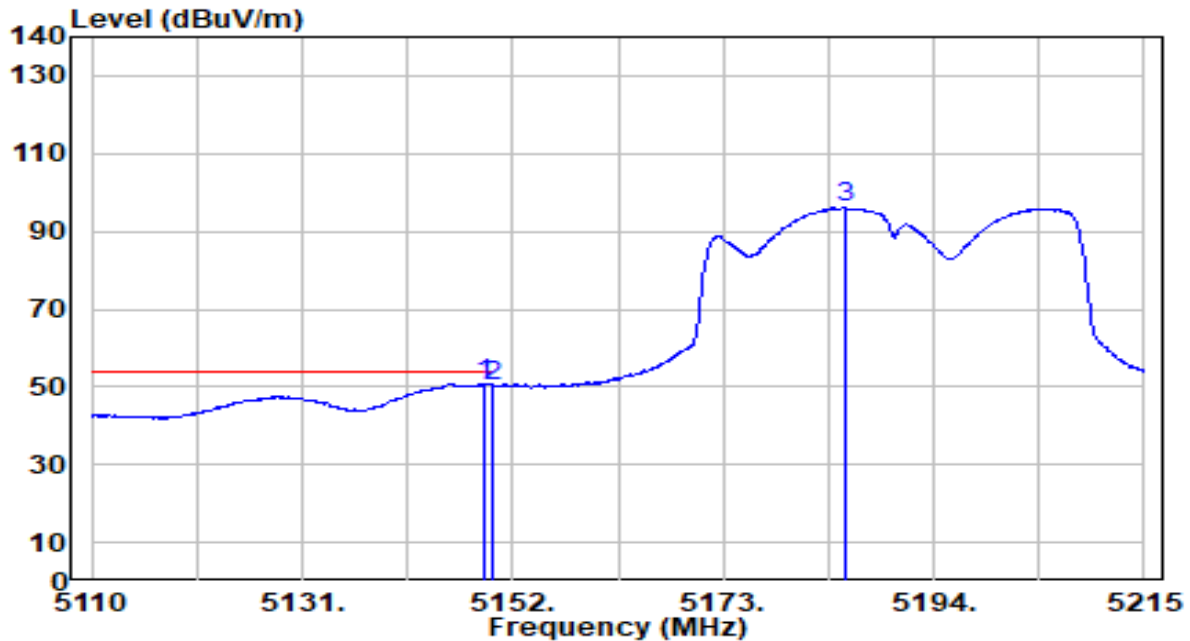


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.060	48.93	1.94	50.87	-3.13	54.00	187	110	Average
2		5150.000	48.37	1.94	50.31	-3.69	54.00	187	110	Average
3		5185.075	94.03	1.96	95.99	N/A	N/A	187	110	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	By Notebook PC

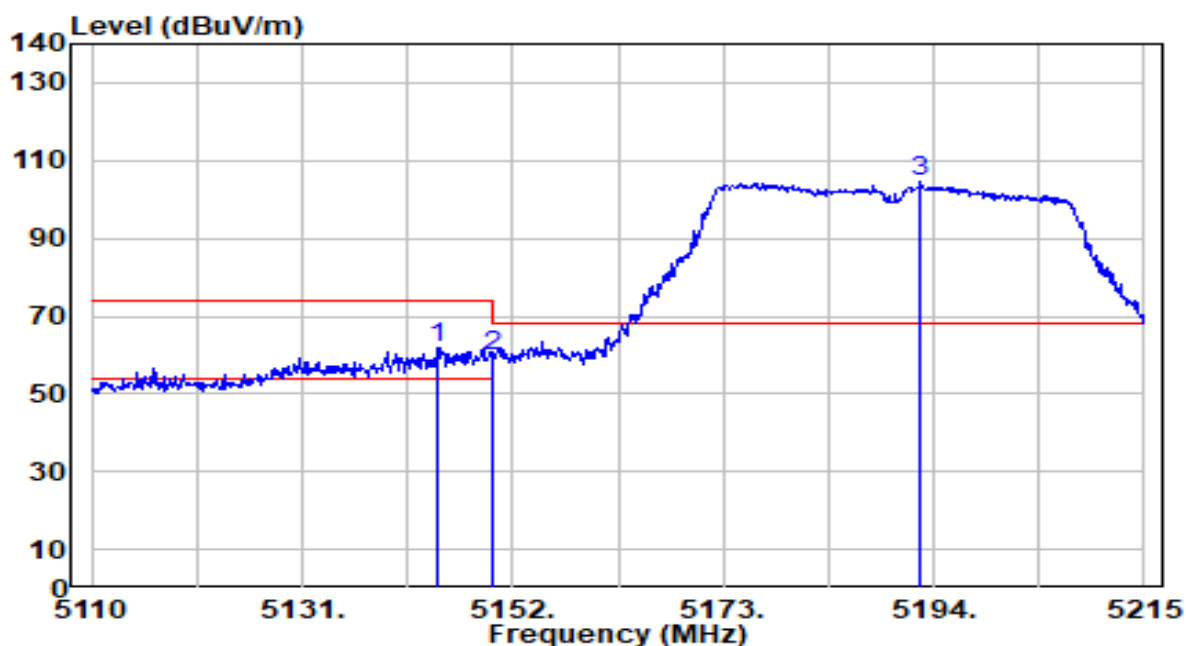


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5144.545	60.09	1.93	62.02	-11.98	74.00	324	60	Peak
2		5150.000	58.02	1.94	59.96	-14.04	74.00	324	60	Peak
3		5192.740	102.47	1.96	104.43	N/A	N/A	324	60	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	By Notebook PC

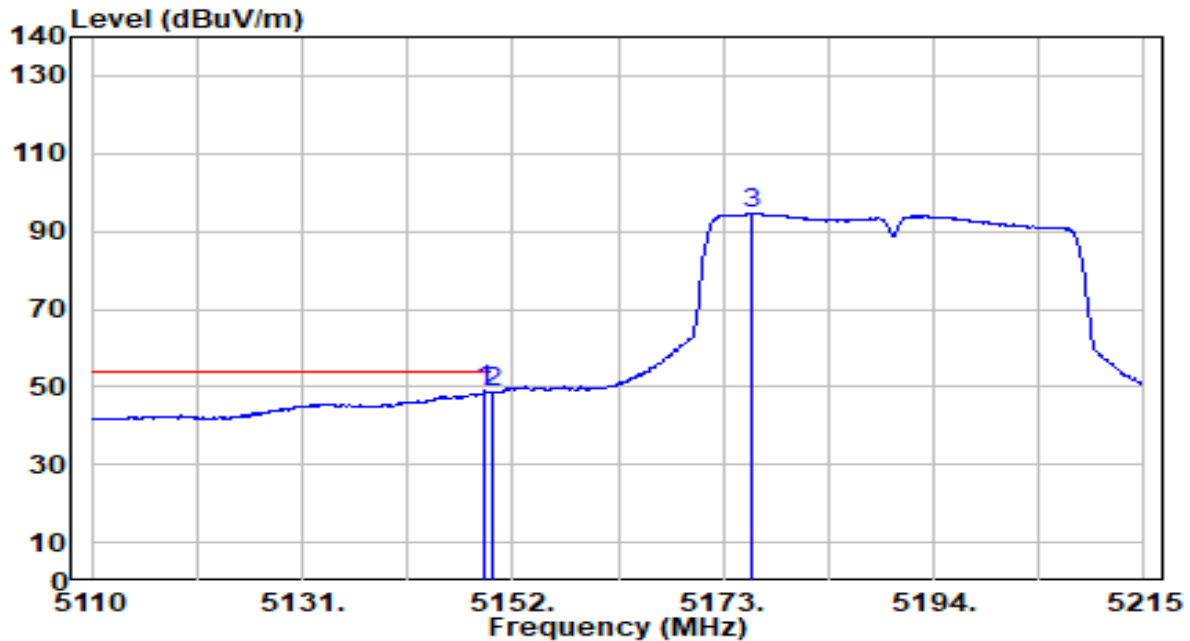


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.270	46.99	1.94	48.93	-5.07	54.00	324	60	Average
2		5150.000	46.57	1.94	48.51	-5.49	54.00	324	60	Average
3		5175.730	92.61	1.95	94.56	N/A	N/A	324	60	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	By Notebook PC

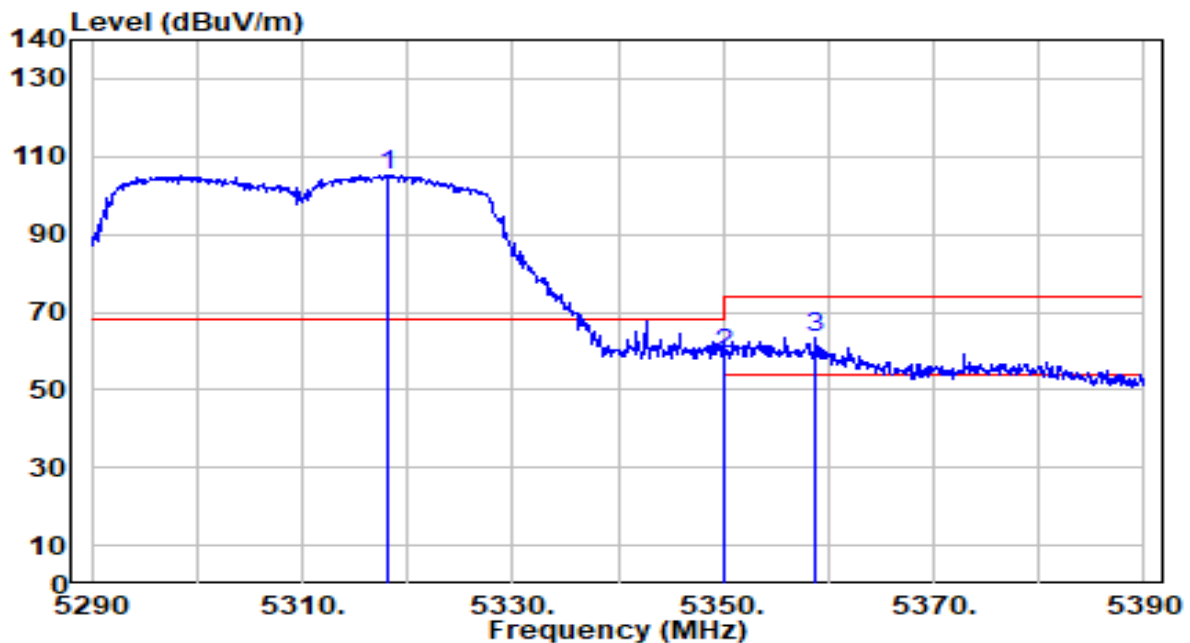


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5318.200	103.23	1.92	105.14	N/A	N/A	109	360	Peak
2	5350.000	57.48	1.90	59.38	-14.62	74.00	109	360	Peak
3	* 5358.800	61.36	1.90	63.26	-10.74	74.00	109	360	Peak

Note:

1. " * ", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	By Notebook PC

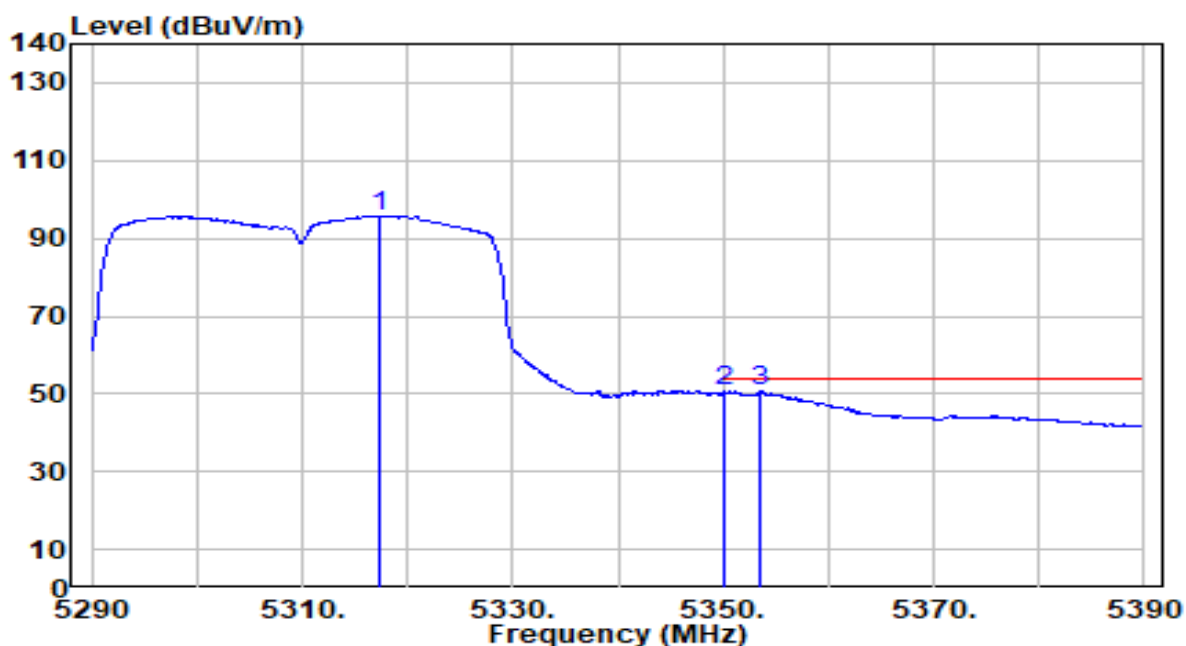


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5317.400	93.90	1.92	95.81	N/A	N/A	109	360	Average
2	* 5350.000	48.91	1.90	50.81	-3.19	54.00	109	360	Average
3	5353.600	48.86	1.90	50.76	-3.24	54.00	109	360	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	By Notebook PC

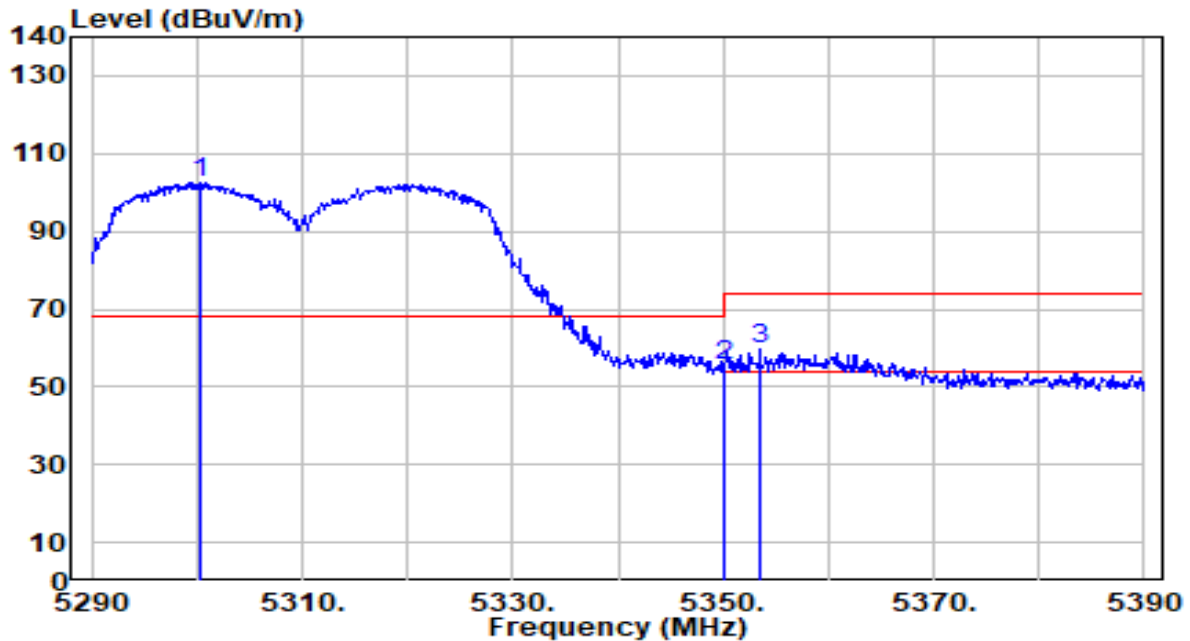


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5300.200	100.50	1.92	102.42	N/A	N/A	119	270	Peak
2	5350.000	53.56	1.90	55.47	-18.53	74.00	119	270	Peak
3	* 5353.500	57.69	1.90	59.59	-14.41	74.00	119	270	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	By Notebook PC

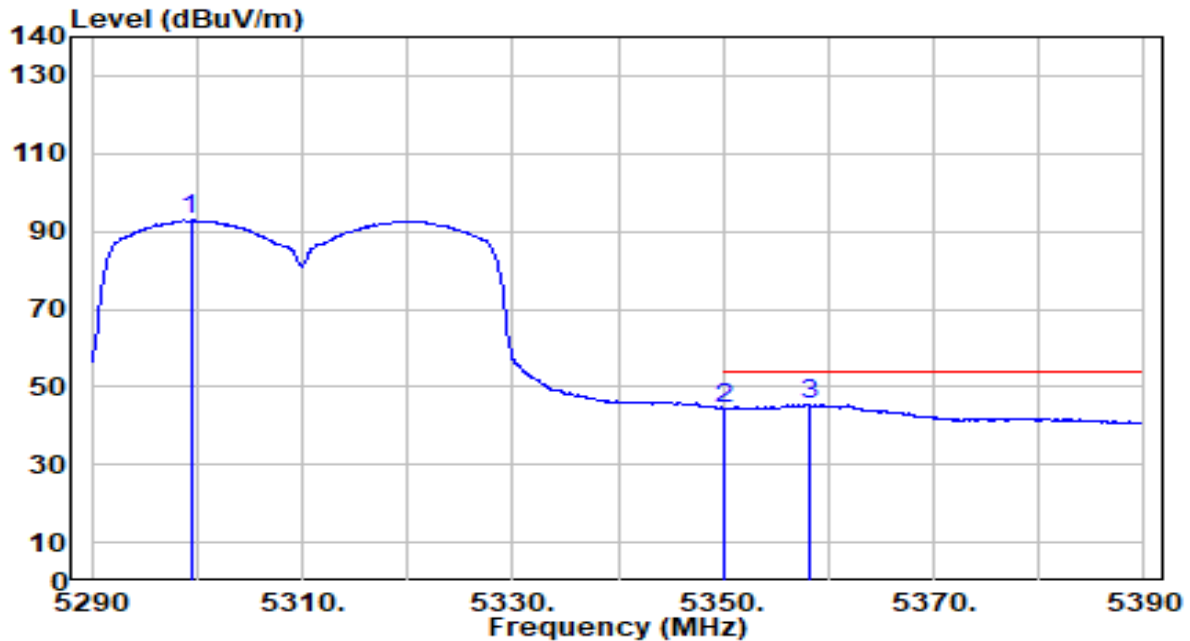


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5299.400	90.91	1.92	92.83	N/A	N/A	119	270	Average
2	5350.000	42.56	1.90	44.46	-9.54	54.00	119	270	Average
3	* 5358.100	43.72	1.90	45.62	-8.38	54.00	119	270	Average

Note:

1. " * ", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	By Notebook PC

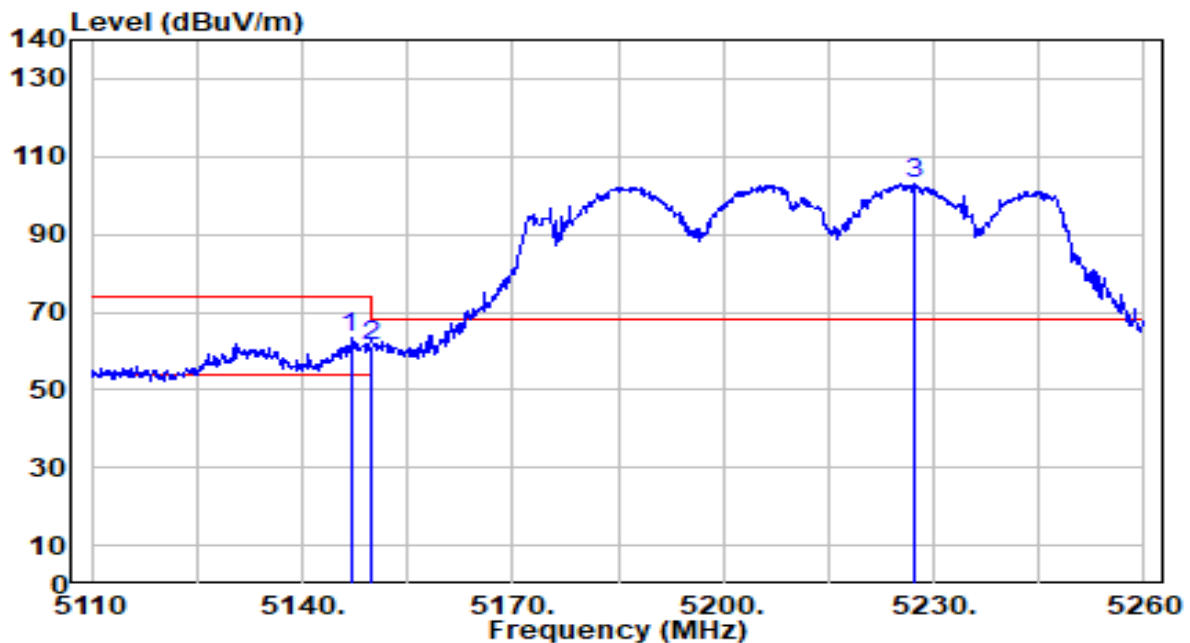


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5146.900	61.30	1.93	63.24	-10.76	74.00	187	110	Peak
2		5150.000	59.13	1.94	61.07	-12.93	74.00	187	110	Peak
3		5227.150	101.29	1.96	103.25	N/A	N/A	187	110	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	By Notebook PC

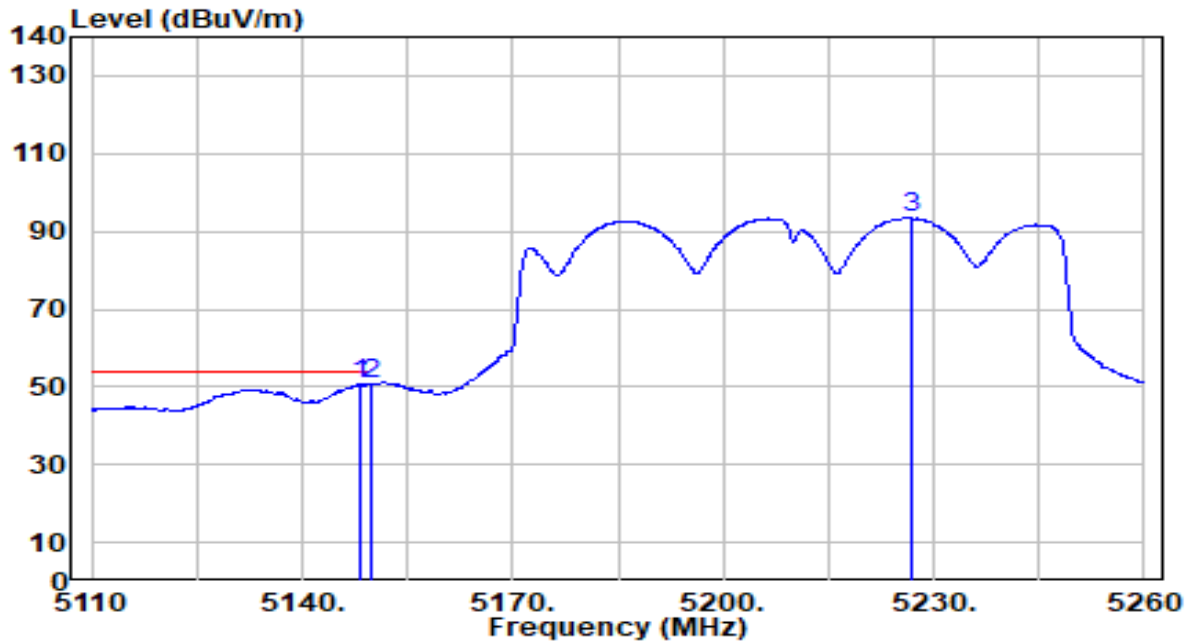


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.250	48.87	1.93	50.81	-3.19	54.00	187	110	Average
2		5150.000	48.74	1.94	50.67	-3.33	54.00	187	110	Average
3		5226.850	91.58	1.96	93.54	N/A	N/A	187	110	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	By Notebook PC

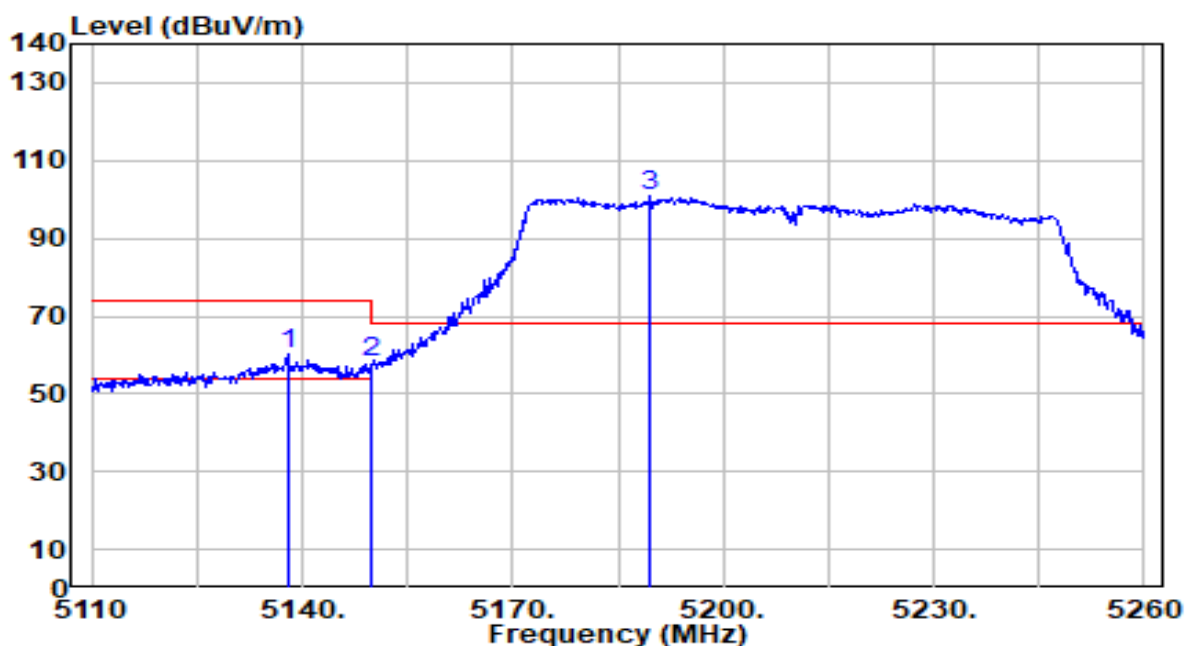


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5137.900	58.14	1.93	60.06	-13.94	74.00	324	60	Peak
2		5150.000	55.95	1.94	57.88	-16.12	74.00	324	60	Peak
3		5189.650	98.92	1.96	100.88	N/A	N/A	324	60	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	By Notebook PC

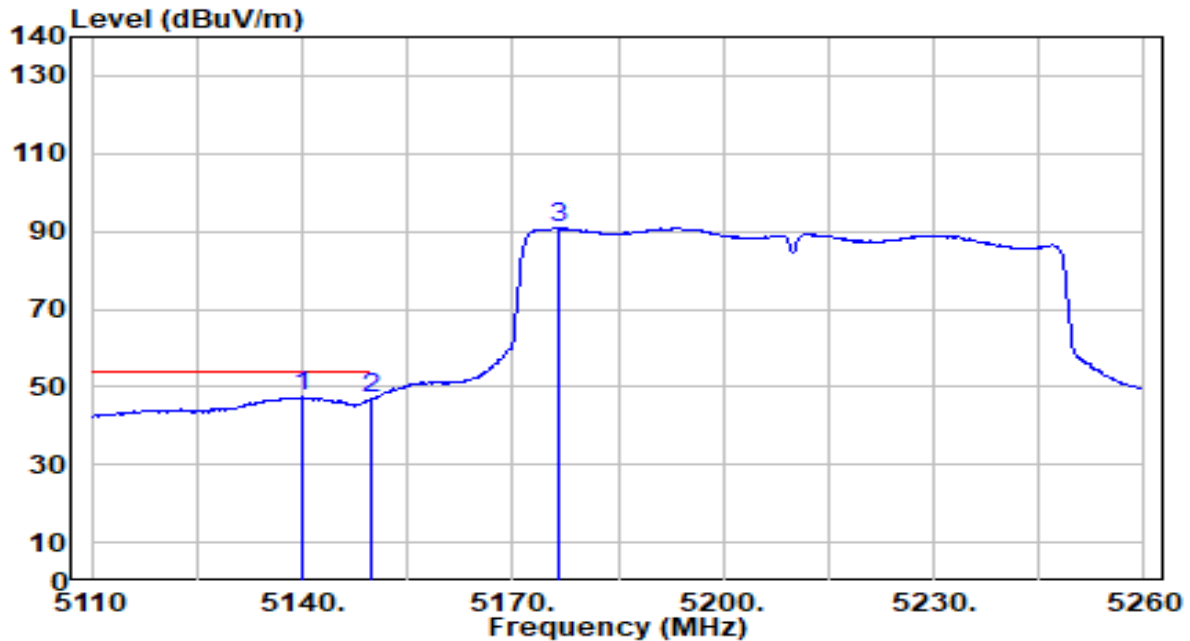


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5140.150	45.41	1.93	47.33	-6.67	54.00	324	60	Average
2		5150.000	44.98	1.94	46.91	-7.09	54.00	324	60	Average
3		5176.450	88.80	1.95	90.75	N/A	N/A	324	60	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	By Notebook PC

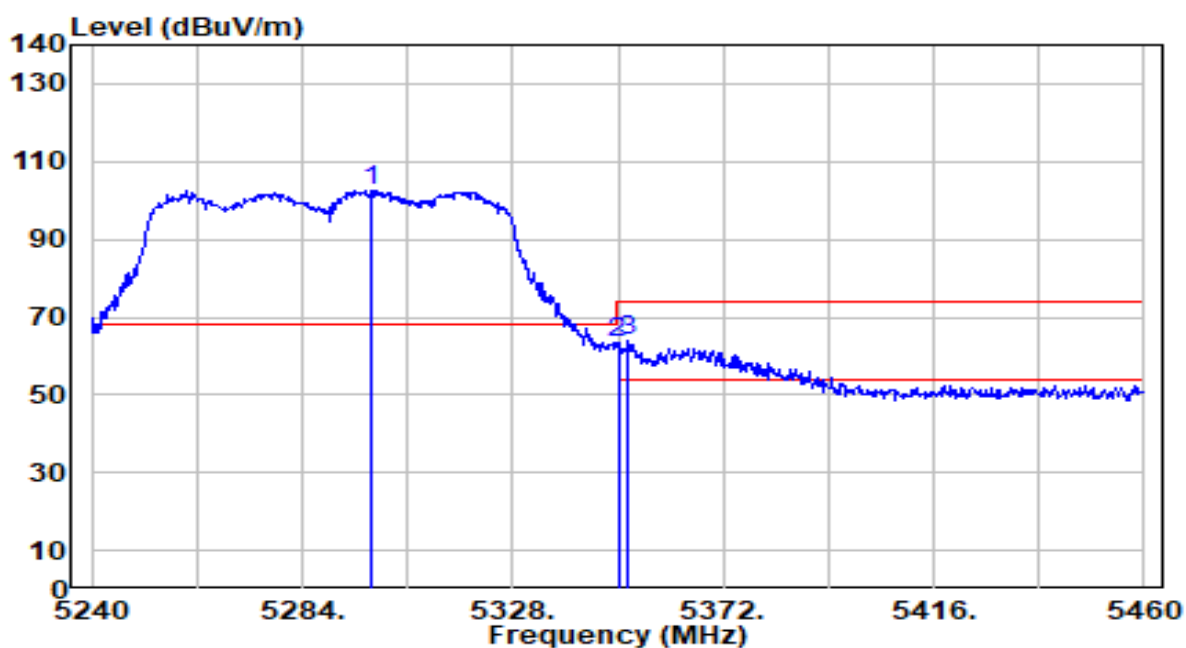


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5298.300	100.61	1.92	102.53	N/A	N/A	109	360	Peak
2	5350.000	61.59	1.90	63.49	-10.51	74.00	109	360	Peak
3	* 5352.200	62.28	1.90	64.18	-9.82	74.00	109	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	By Notebook PC

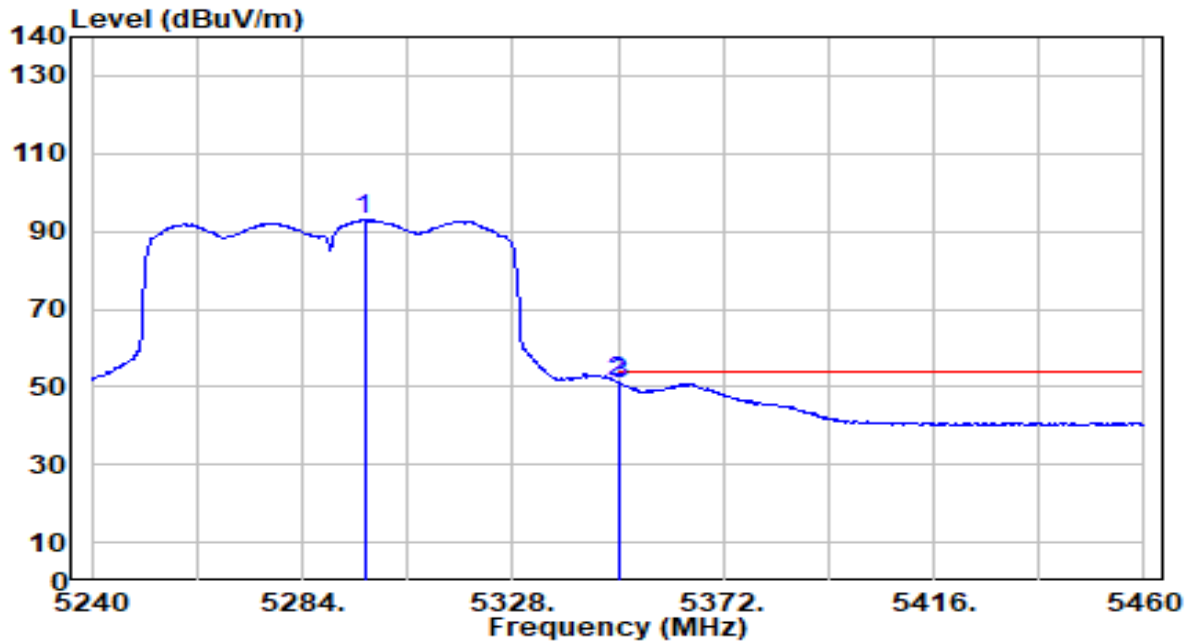


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5296.980	90.89	1.92	92.81	N/A	N/A	109	360	Average
2	*	5350.000	49.46	1.90	51.37	-2.63	54.00	109	360	Average
3		5350.440	49.00	1.90	50.90	-3.10	54.00	109	360	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	By Notebook PC

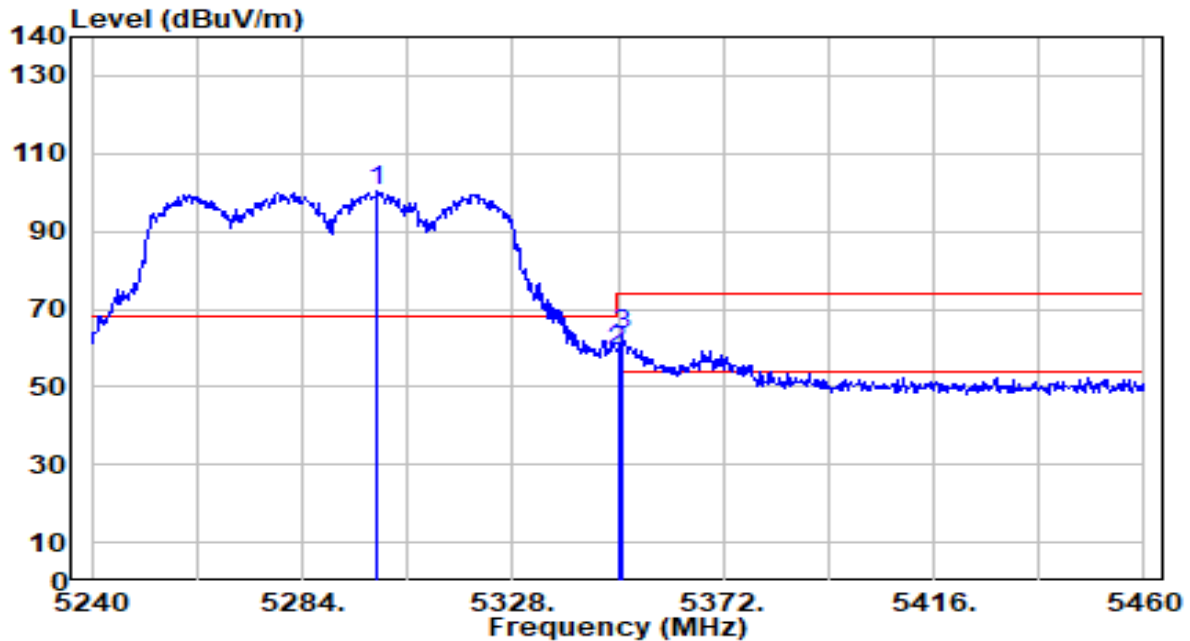


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5299.840	98.31	1.92	100.23	N/A	N/A	119	270	Peak
2	5350.000	57.35	1.90	59.26	-14.74	74.00	119	270	Peak
3	* 5350.880	61.41	1.90	63.32	-10.68	74.00	119	270	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	By Notebook PC

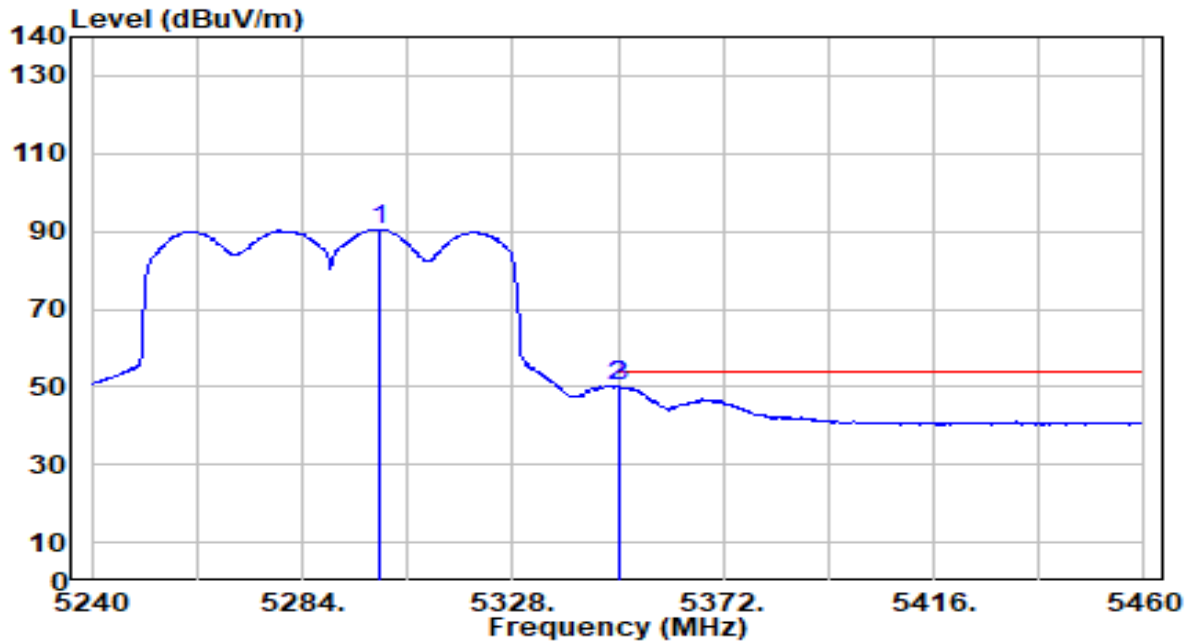


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5300.060	88.62	1.92	90.54	N/A	N/A	119	270	Average
2	* 5350.000	48.47	1.90	50.37	-3.63	54.00	119	270	Average
3	5350.440	48.25	1.90	50.15	-3.85	54.00	119	270	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-15
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	By Notebook PC

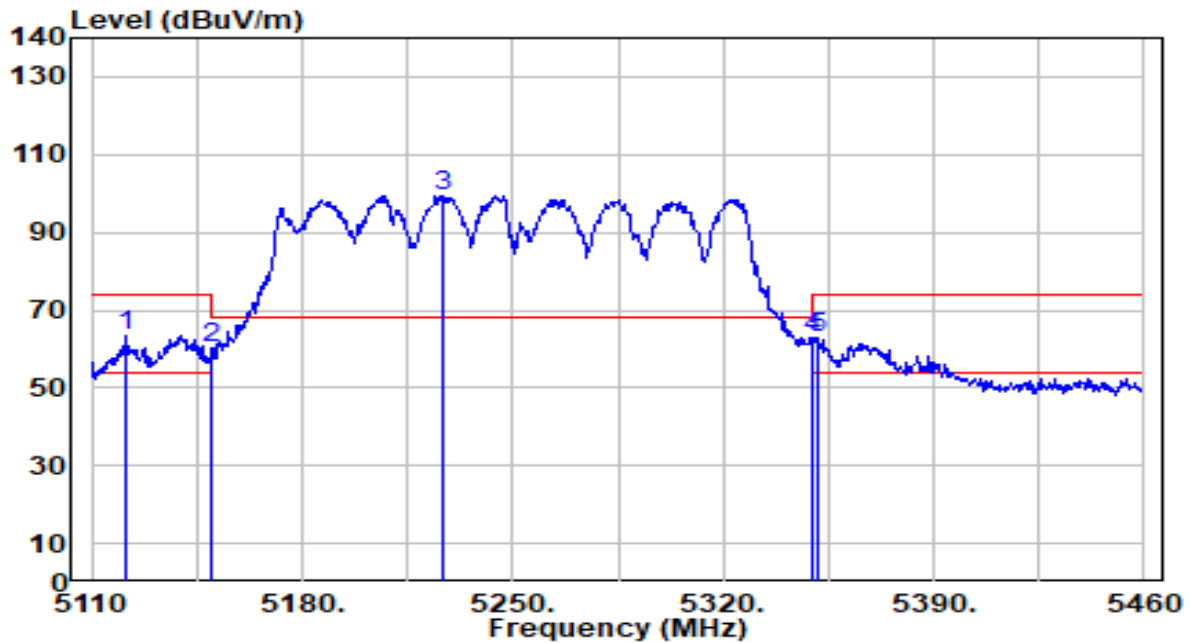

No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5121.550	61.41	1.92	63.33	-10.67	74.00	187	110	Peak
2		5150.000	58.46	1.94	60.40	-13.60	74.00	187	110	Peak
3		5226.550	97.55	1.96	99.51	N/A	N/A	187	110	Peak
4		5350.000	60.74	1.90	62.64	-11.36	74.00	187	110	Peak
5		5351.150	60.71	1.90	62.61	-11.39	74.00	187	110	Peak

Note:


1. " *", means this data is the worst emission level.

2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.

3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).

4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-15
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	By Notebook PC

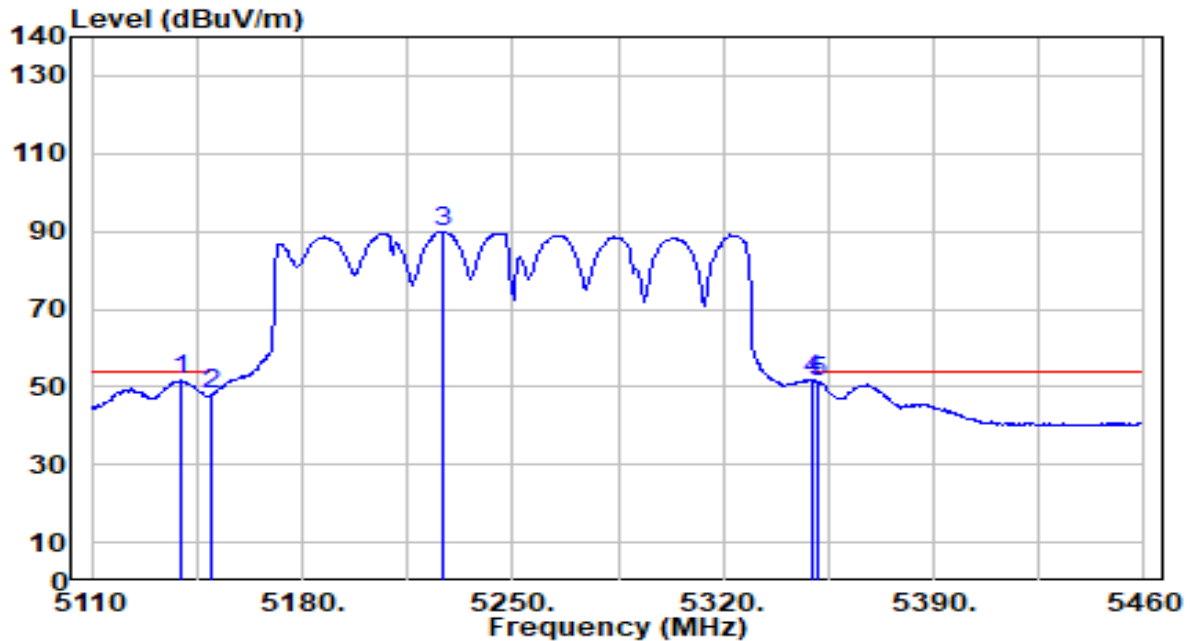

No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5140.100	49.72	1.93	51.65	-2.35	54.00	187	110	Average
2		5150.000	45.98	1.94	47.92	-6.08	54.00	187	110	Average
3		5226.550	88.10	1.96	90.06	N/A	N/A	187	110	Average
4		5350.000	49.64	1.90	51.55	-2.45	54.00	187	110	Average
5		5351.150	49.58	1.90	51.48	-2.52	54.00	187	110	Average

Note:


1. " *", means this data is the worst emission level.

2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.

3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-15
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	By Notebook PC

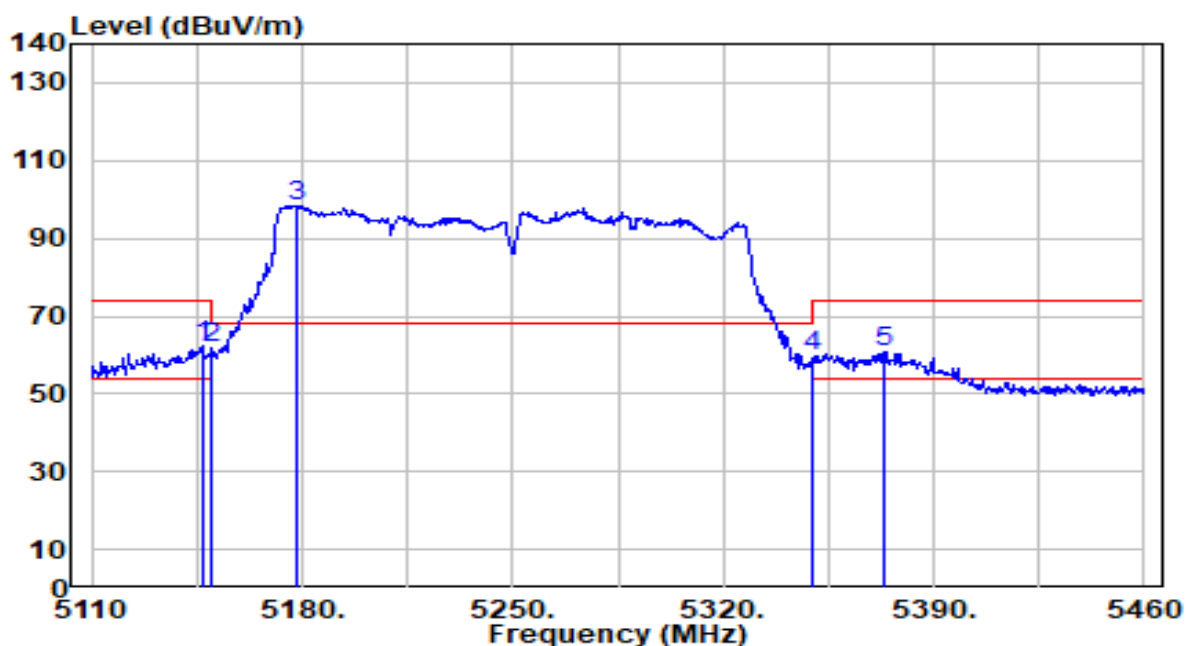

No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5146.750	60.49	1.93	62.43	-11.57	74.00	324	60	Peak
2		5150.000	59.96	1.94	61.89	-12.11	74.00	324	60	Peak
3		5178.250	96.44	1.95	98.39	N/A	N/A	324	60	Peak
4		5350.000	57.60	1.90	59.51	-14.49	74.00	324	60	Peak
5		5373.900	59.03	1.90	60.93	-13.07	74.00	324	60	Peak

Note:


1. " *", means this data is the worst emission level.

2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.

3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-15
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	By Notebook PC

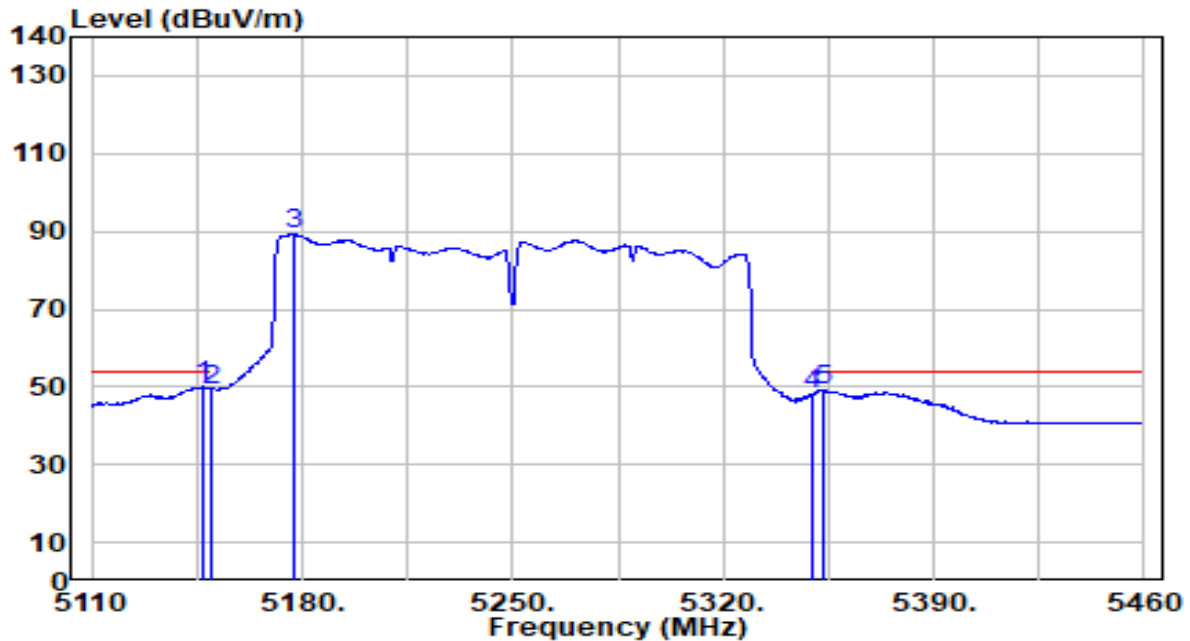

No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5146.750	48.03	1.93	49.96	-4.04	54.00	324	60	Average
2		5150.000	47.46	1.94	49.39	-4.61	54.00	324	60	Average
3		5177.200	87.19	1.95	89.15	N/A	N/A	324	60	Average
4		5350.000	46.35	1.90	48.26	-5.74	54.00	324	60	Average
5		5353.600	47.37	1.90	49.28	-4.72	54.00	324	60	Average

Note:


1. " *", means this data is the worst emission level.

2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.

3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	By Notebook PC

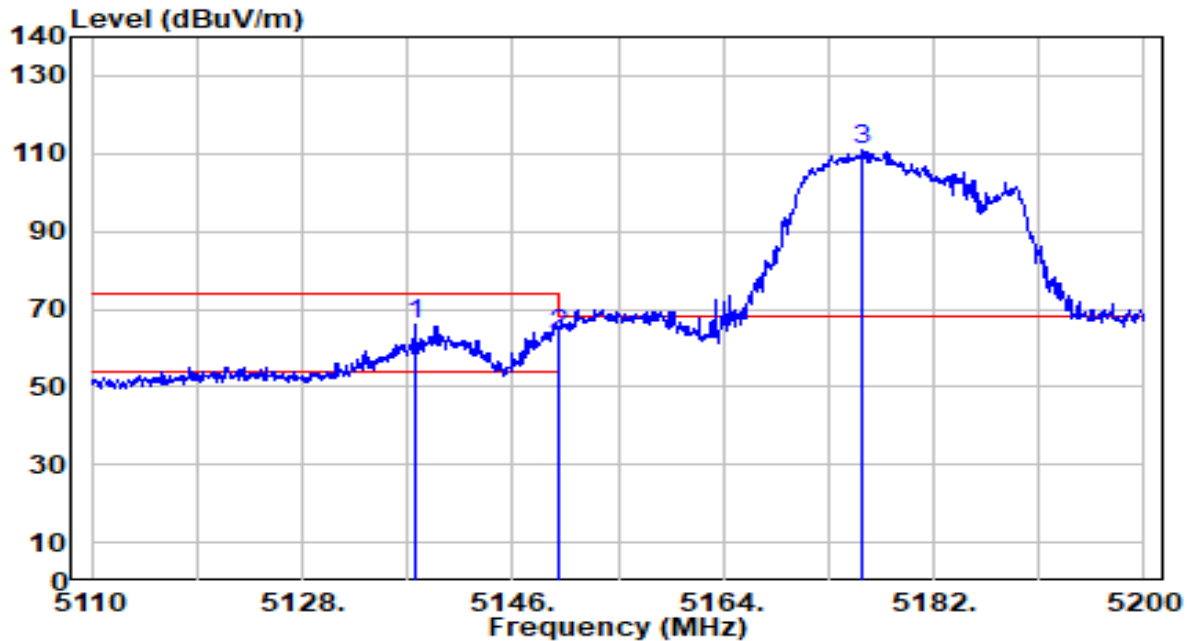


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5137.630	64.27	1.93	66.20	-7.80	74.00	187	110	Peak
2		5150.000	61.66	1.94	63.59	-10.41	74.00	187	110	Peak
3		5175.970	109.05	1.95	111.00	N/A	N/A	187	110	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	By Notebook PC

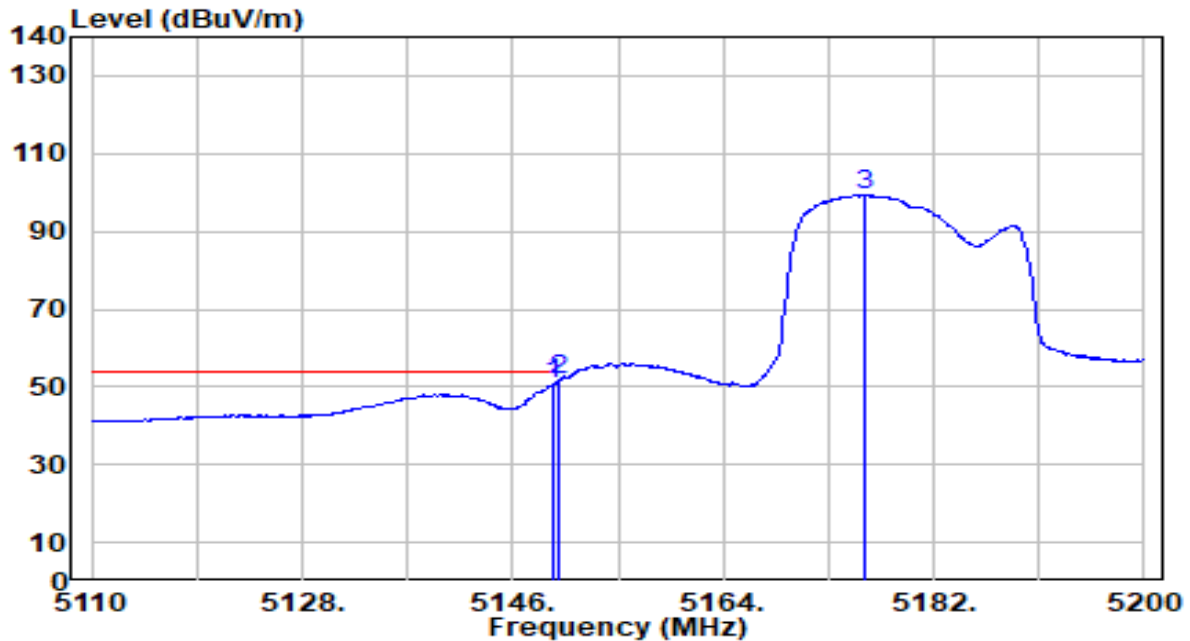


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5149.420	48.68	1.94	50.61	-3.39	54.00	187	110	Average
2	* 5150.000	49.71	1.94	51.64	-2.36	54.00	187	110	Average
3	5176.060	97.24	1.95	99.20	N/A	N/A	187	110	Average

Note:

1. " * ", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	By Notebook PC

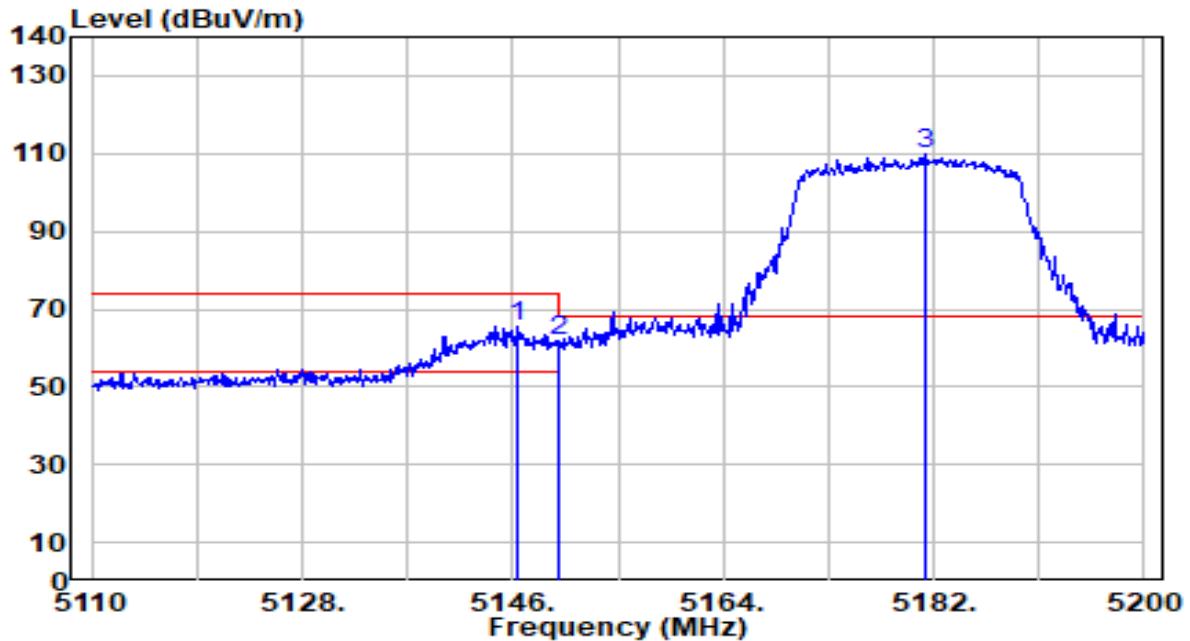


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5146.450	63.75	1.93	65.68	-8.32	74.00	324	60	Peak
2		5150.000	60.10	1.94	62.04	-11.96	74.00	324	60	Peak
3		5181.190	107.78	1.96	109.73	N/A	N/A	324	60	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	By Notebook PC

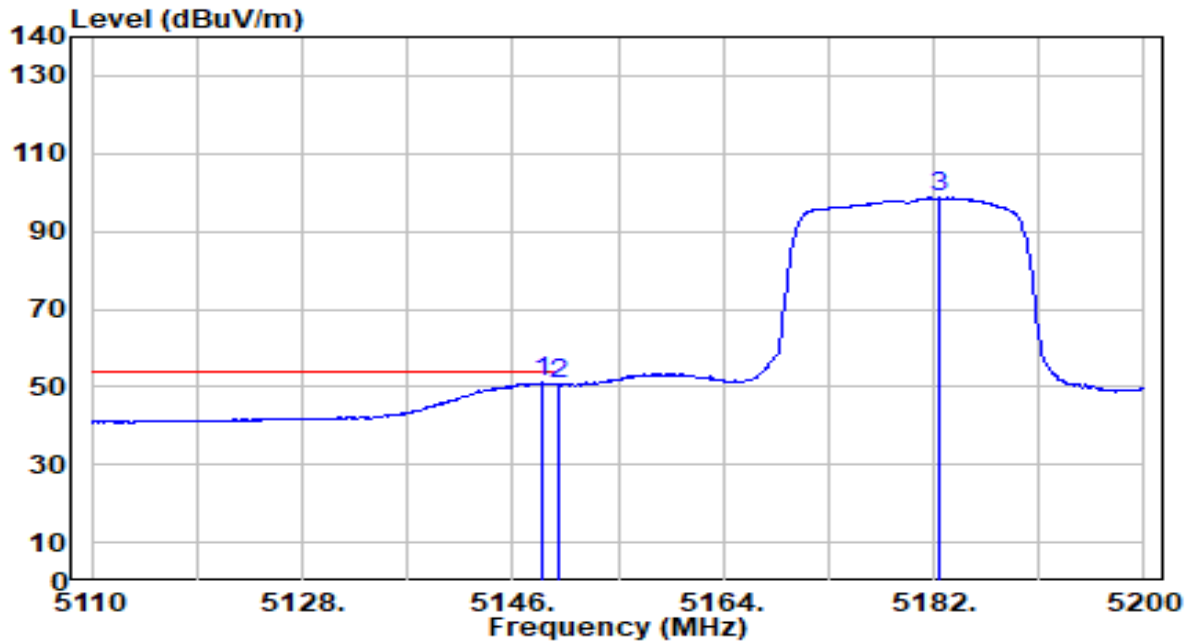


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.520	49.26	1.94	51.20	-2.80	54.00	324	60	Average
2		5150.000	48.81	1.94	50.75	-3.25	54.00	324	60	Average
3		5182.450	96.82	1.96	98.78	N/A	N/A	324	60	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	By Notebook PC

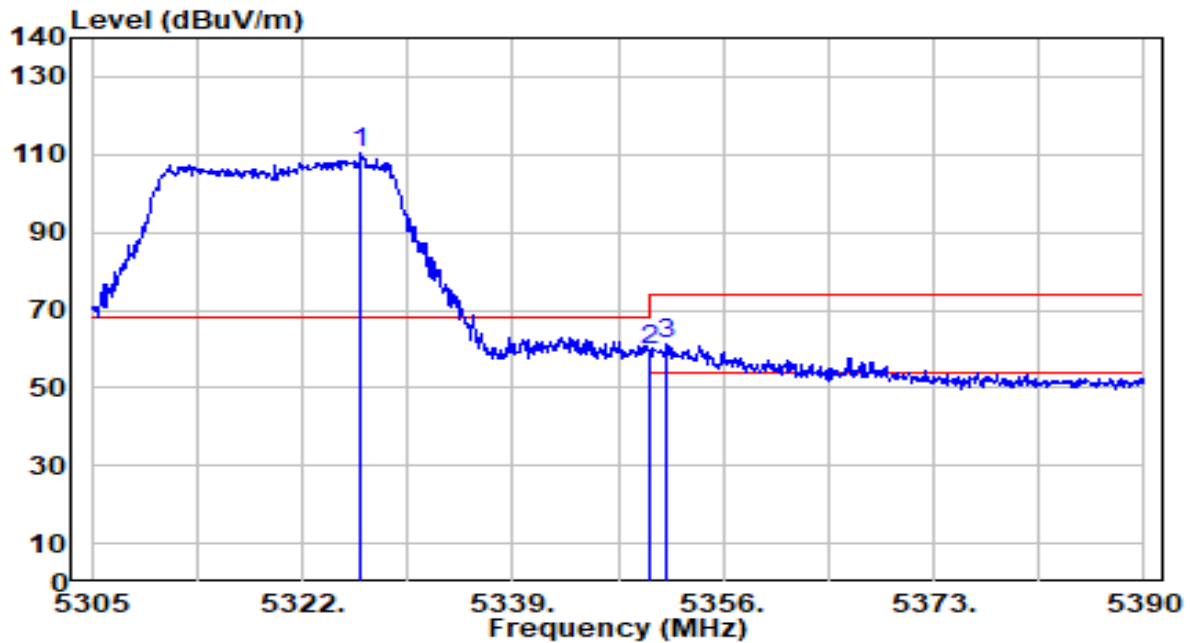


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5326.760	108.41	1.91	110.33	N/A	N/A	109	360	Peak
2	5350.000	57.77	1.90	59.67	-14.33	74.00	109	360	Peak
3	* 5351.495	59.29	1.90	61.20	-12.80	74.00	109	360	Peak

Note:

1. " * ", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	By Notebook PC

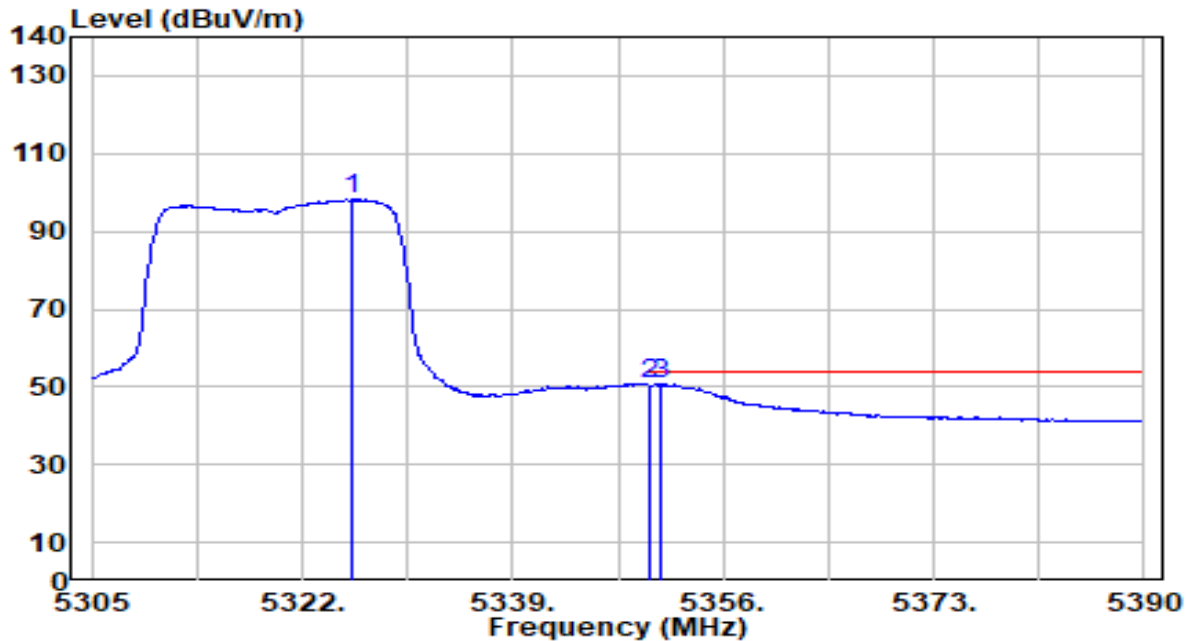


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5326.080	96.36	1.91	98.27	N/A	N/A	109	360	Average
2	5350.000	49.04	1.90	50.94	-3.06	54.00	109	360	Average
3	* 5350.985	49.04	1.90	50.95	-3.05	54.00	109	360	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	By Notebook PC

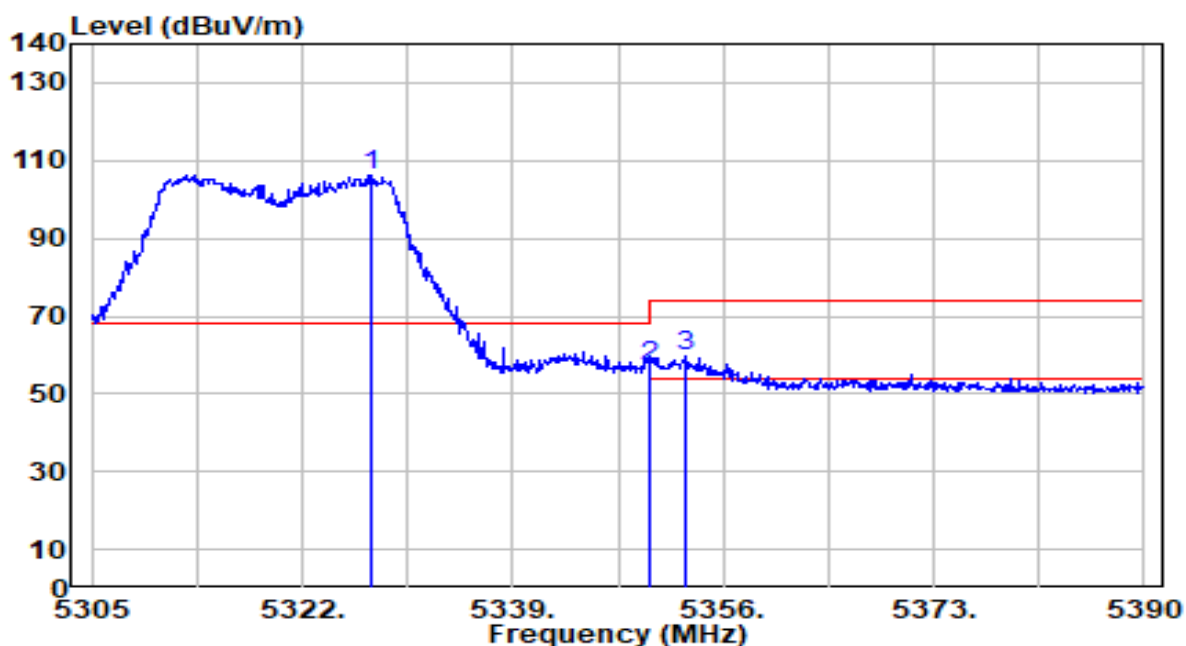


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5327.525	104.38	1.91	106.30	N/A	N/A	119	270	Peak
2	5350.000	55.02	1.90	56.93	-17.07	74.00	119	270	Peak
3	* 5352.940	57.58	1.90	59.48	-14.52	74.00	119	270	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	By Notebook PC

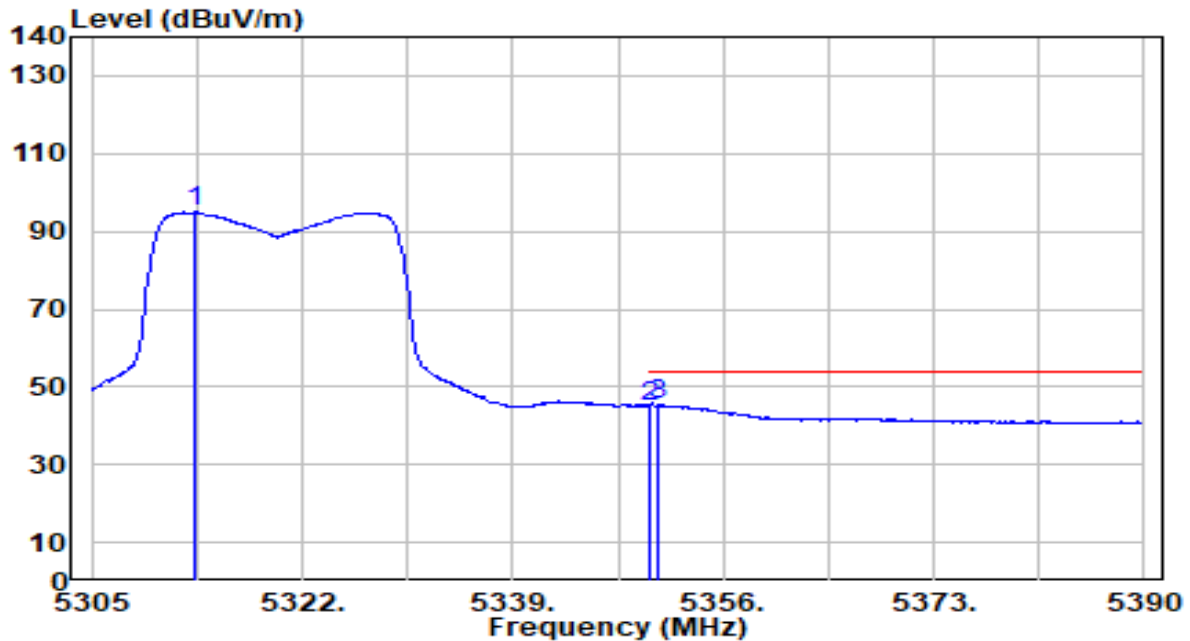


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5313.415	93.00	1.92	94.92	N/A	N/A	119	270	Average
2	5350.000	43.24	1.90	45.14	-8.86	54.00	119	270	Average
3	* 5350.730	43.44	1.90	45.34	-8.66	54.00	119	270	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	By Notebook PC

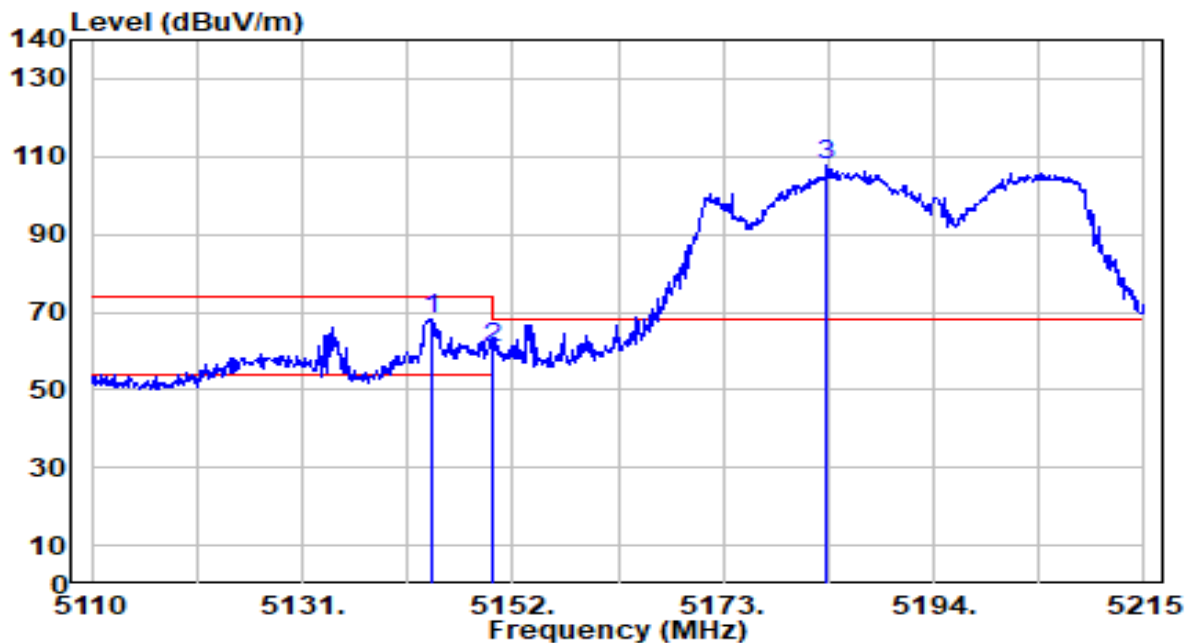


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5143.810	66.21	1.93	68.14	-5.86	74.00	187	110	Peak
2		5150.000	58.66	1.94	60.60	-13.40	74.00	187	110	Peak
3		5183.290	105.85	1.96	107.80	N/A	N/A	187	110	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	By Notebook PC

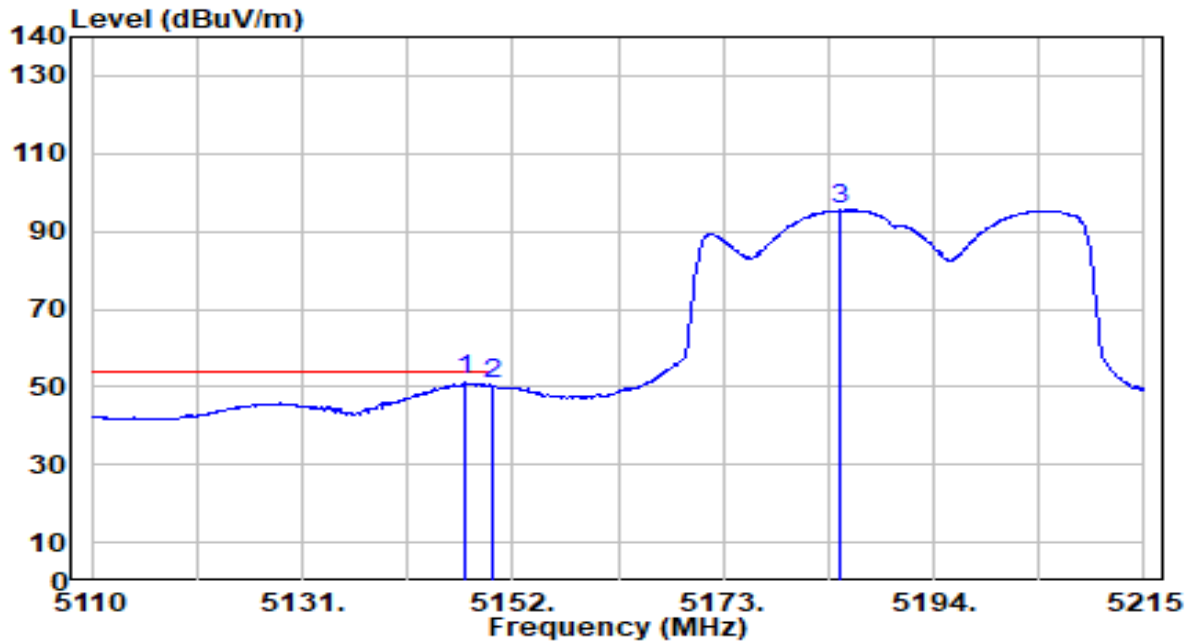


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.275	49.65	1.93	51.58	-2.42	54.00	187	110	Average
2		5150.000	48.96	1.94	50.90	-3.10	54.00	187	110	Average
3		5184.760	93.56	1.96	95.52	N/A	N/A	187	110	Average

Note:

1. " * ", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	By Notebook PC

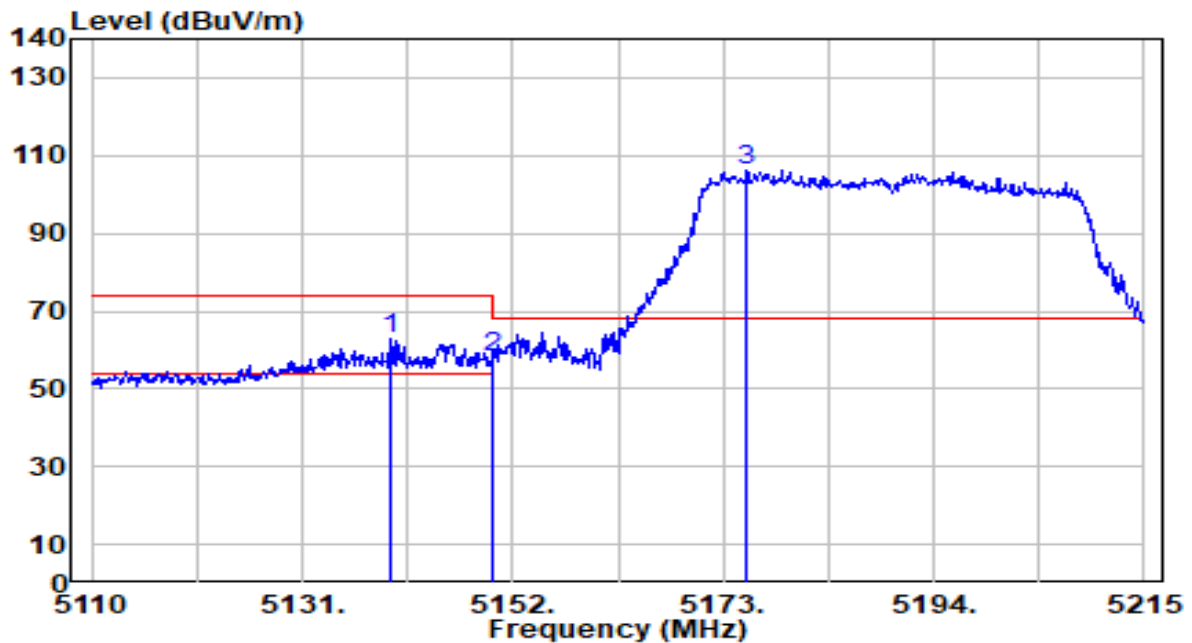


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5139.820	60.70	1.93	62.63	-11.37	74.00	324	60	Peak
2		5150.000	56.06	1.94	58.00	-16.00	74.00	324	60	Peak
3		5175.415	104.42	1.95	106.37	N/A	N/A	324	60	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	By Notebook PC

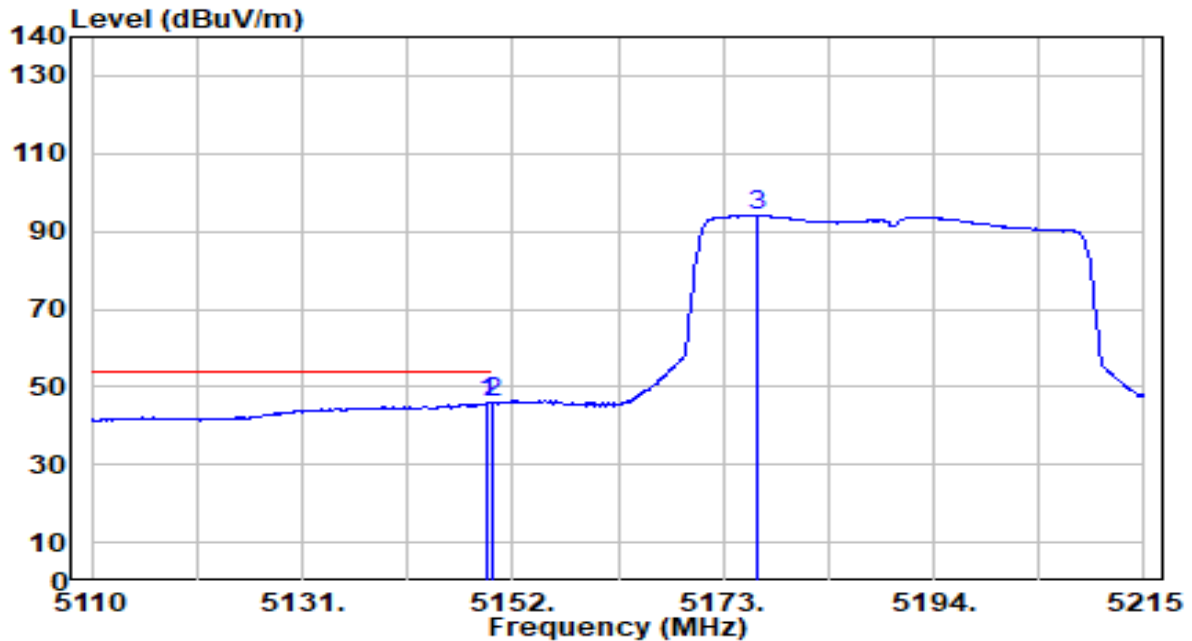


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.375	43.85	1.94	45.79	-8.21	54.00	324	60	Average
2		5150.000	43.81	1.94	45.75	-8.25	54.00	324	60	Average
3		5176.465	92.22	1.95	94.18	N/A	N/A	324	60	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	By Notebook PC

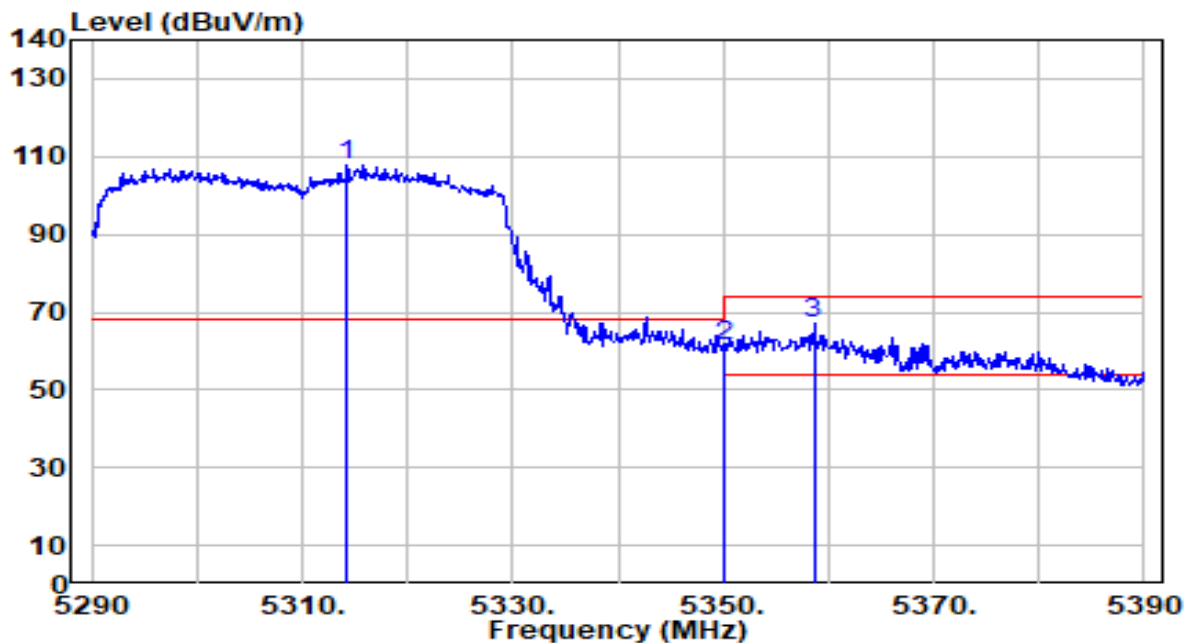


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5314.300	105.99	1.92	107.90	N/A	N/A	109	360	Peak
2	5350.000	59.23	1.90	61.14	-12.86	74.00	109	360	Peak
3	* 5358.600	65.16	1.90	67.06	-6.94	74.00	109	360	Peak

Note:

1. " * ", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	By Notebook PC

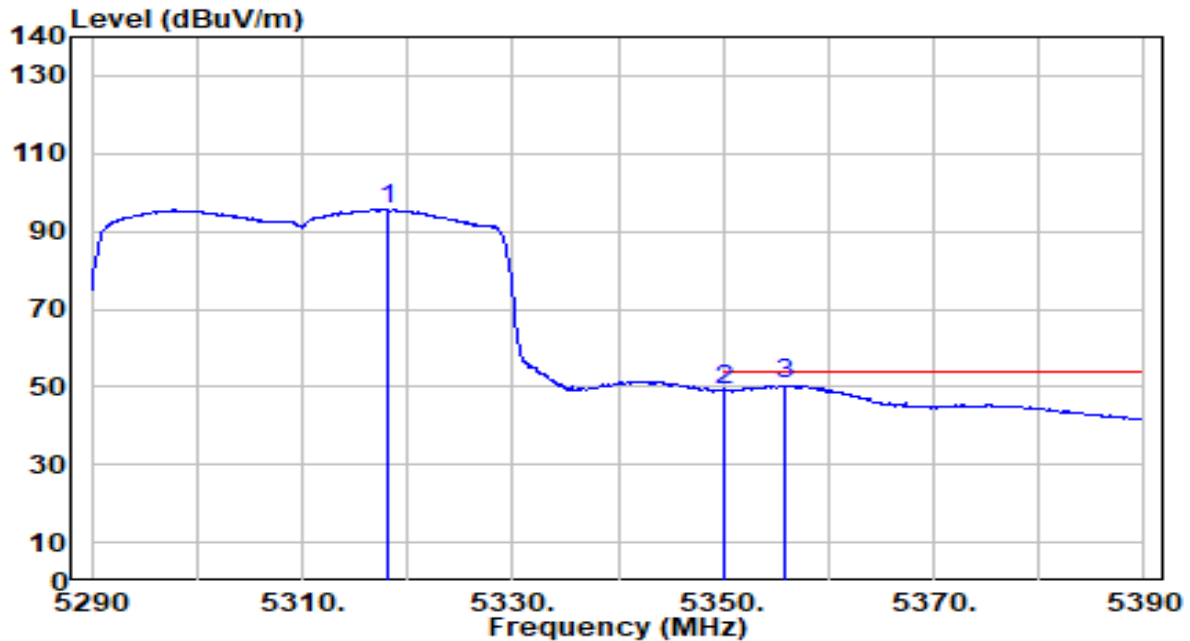


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5318.100	93.71	1.92	95.63	N/A	N/A	109	360	Average
2	5350.000	47.15	1.90	49.06	-4.94	54.00	109	360	Average
3	* 5355.800	48.93	1.90	50.83	-3.17	54.00	109	360	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	By Notebook PC

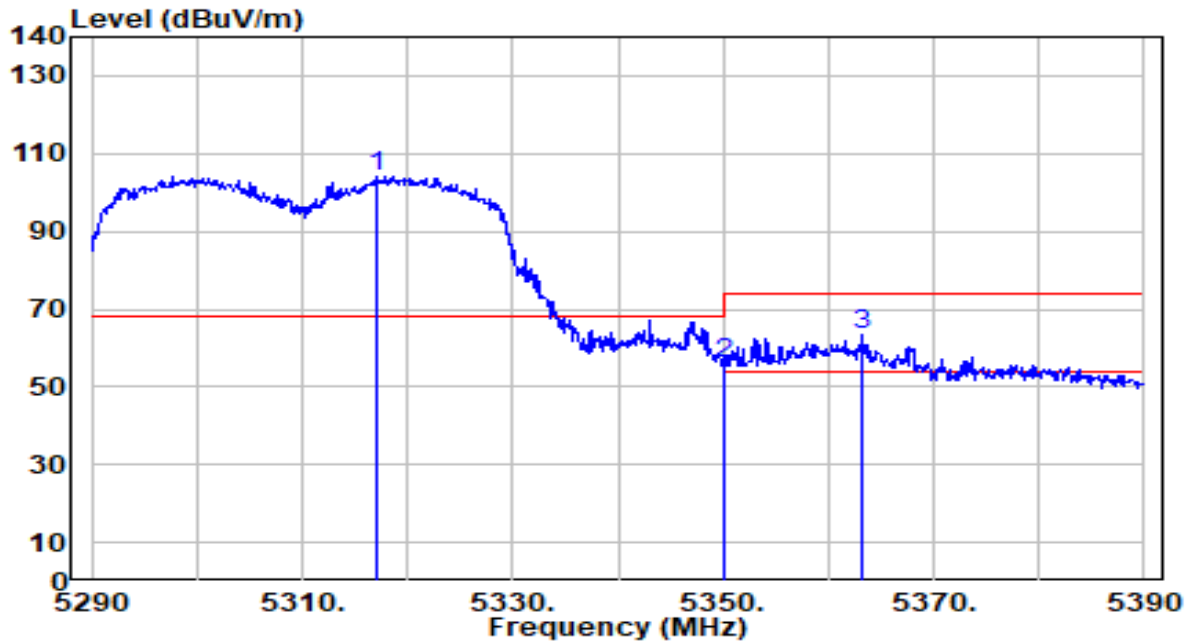


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5317.100	102.10	1.92	104.01	N/A	N/A	119	270	Peak
2	5350.000	54.00	1.90	55.90	-18.10	74.00	119	270	Peak
3	* 5363.300	61.32	1.90	63.22	-10.78	74.00	119	270	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	By Notebook PC

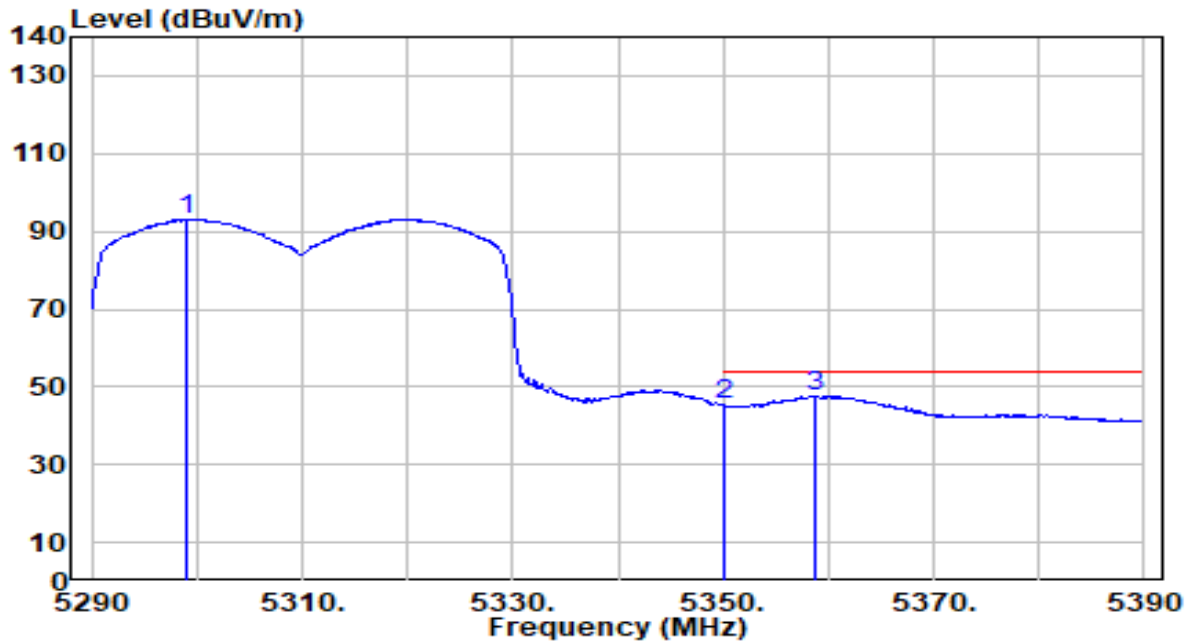


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5299.100	91.17	1.92	93.09	N/A	N/A	119	270	Average
2	5350.000	43.49	1.90	45.39	-8.61	54.00	119	270	Average
3	* 5358.800	45.68	1.90	47.58	-6.42	54.00	119	270	Average

Note:

1. " * ", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	By Notebook PC

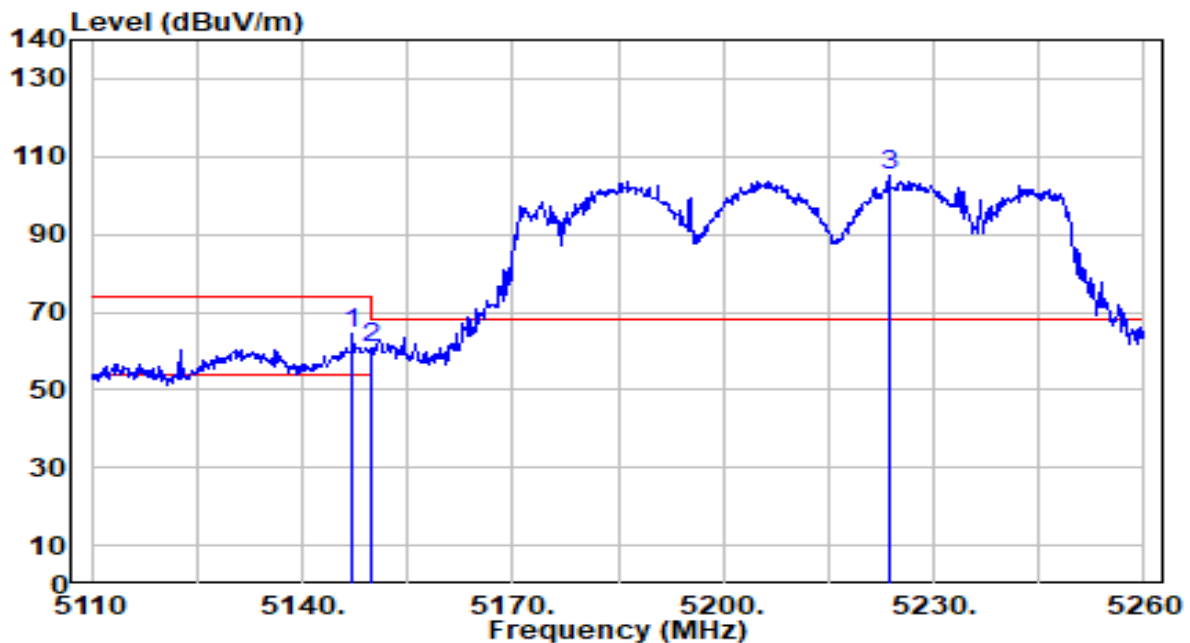


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.200	62.56	1.93	64.50	-9.50	74.00	187	110	Peak
2		5150.000	58.88	1.94	60.81	-13.19	74.00	187	110	Peak
3		5223.550	103.03	1.96	104.99	N/A	N/A	187	110	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	By Notebook PC

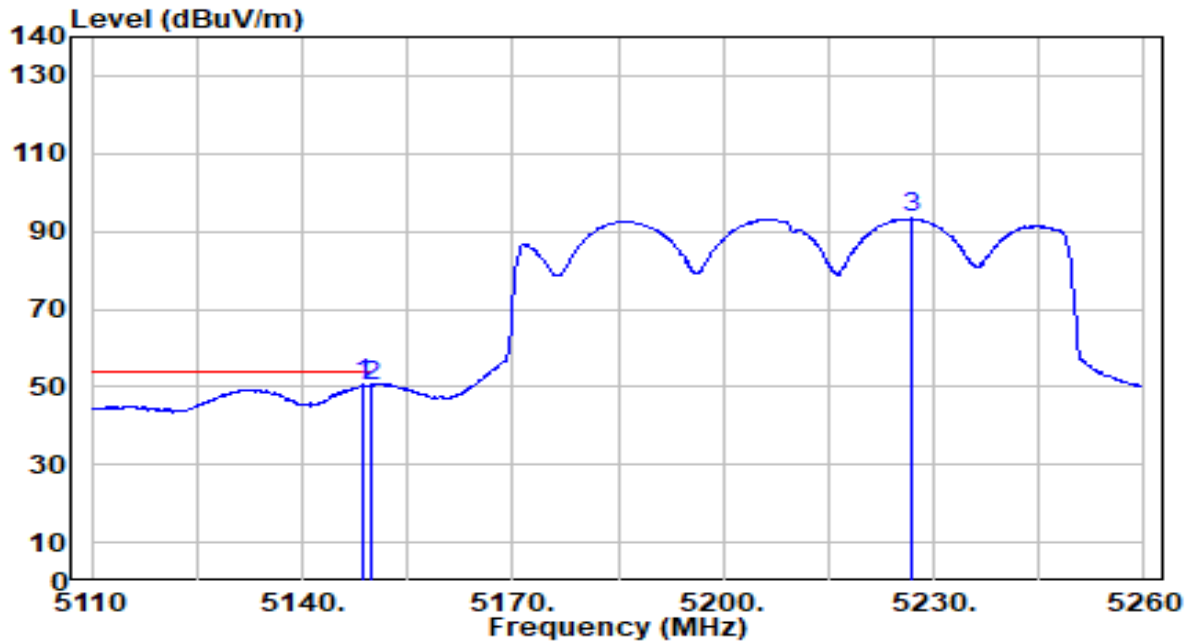


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.700	48.90	1.94	50.84	-3.16	54.00	187	110	Average
2		5150.000	48.37	1.94	50.31	-3.69	54.00	187	110	Average
3		5226.850	91.35	1.96	93.31	N/A	N/A	187	110	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	By Notebook PC

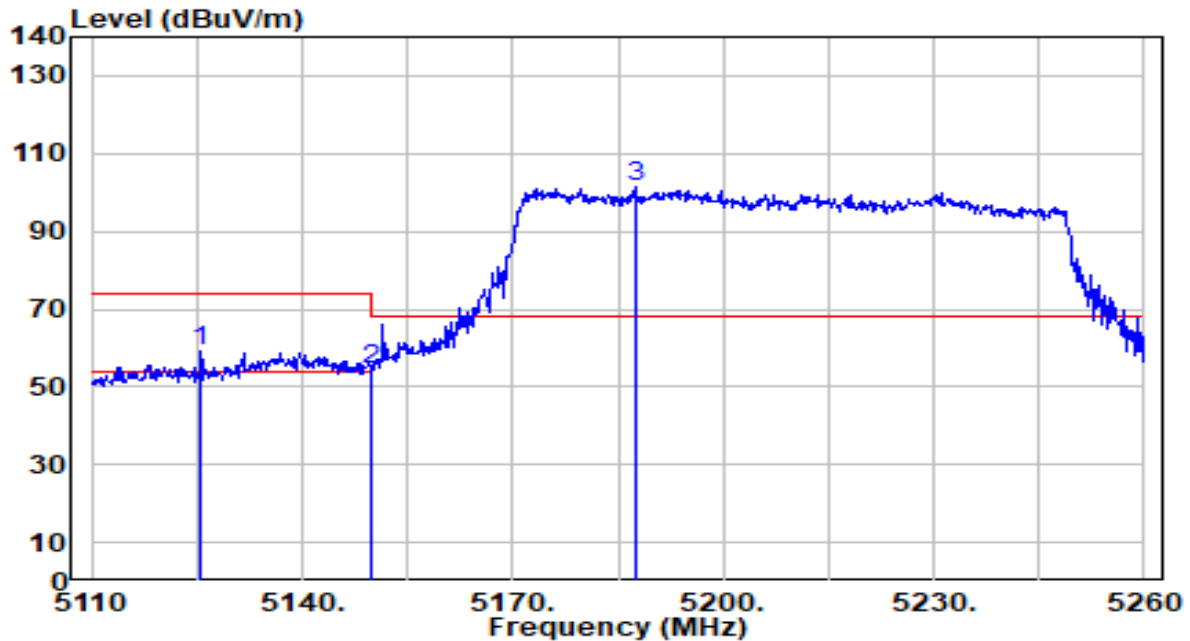


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5125.600	57.18	1.92	59.10	-14.90	74.00	324	60	Peak
2		5150.000	52.66	1.94	54.60	-19.40	74.00	324	60	Peak
3		5187.550	99.41	1.96	101.37	N/A	N/A	324	60	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	By Notebook PC

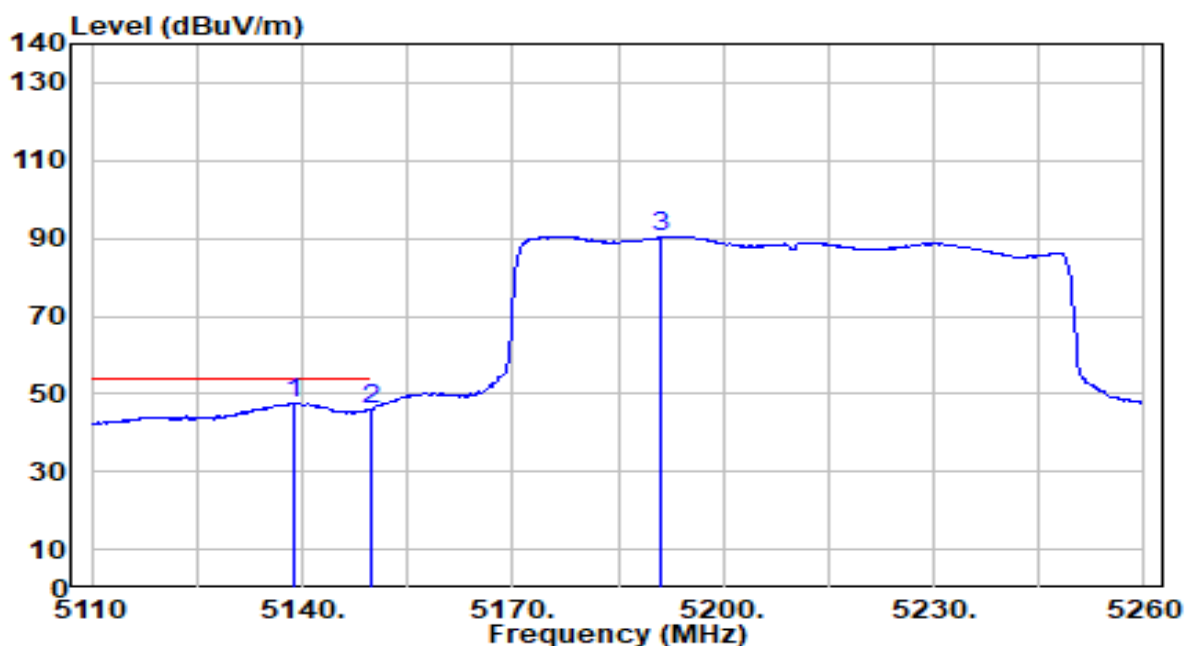


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5138.950	45.86	1.93	47.79	-6.21	54.00	324	60	Average
2		5150.000	44.11	1.94	46.04	-7.96	54.00	324	60	Average
3		5191.000	88.53	1.96	90.49	N/A	N/A	324	60	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	By Notebook PC

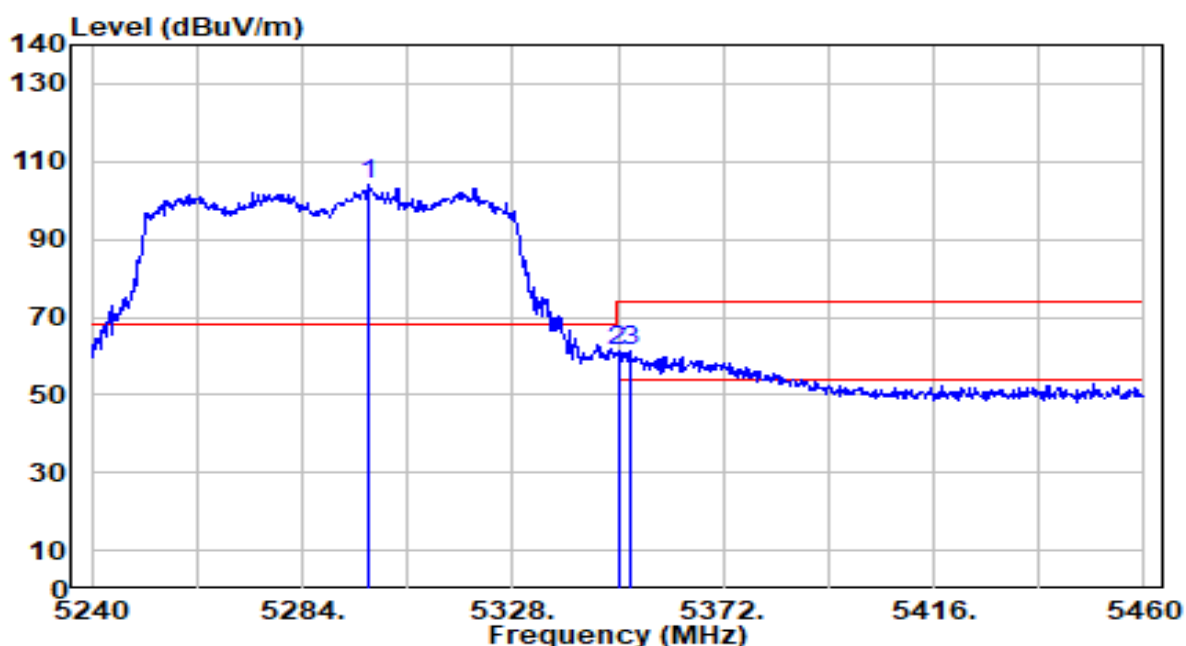


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5297.640	101.91	1.92	103.83	N/A	N/A	109	360	Peak
2	* 5350.000	59.56	1.90	61.47	-12.53	74.00	109	360	Peak
3	5352.420	59.54	1.90	61.44	-12.56	74.00	109	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	By Notebook PC

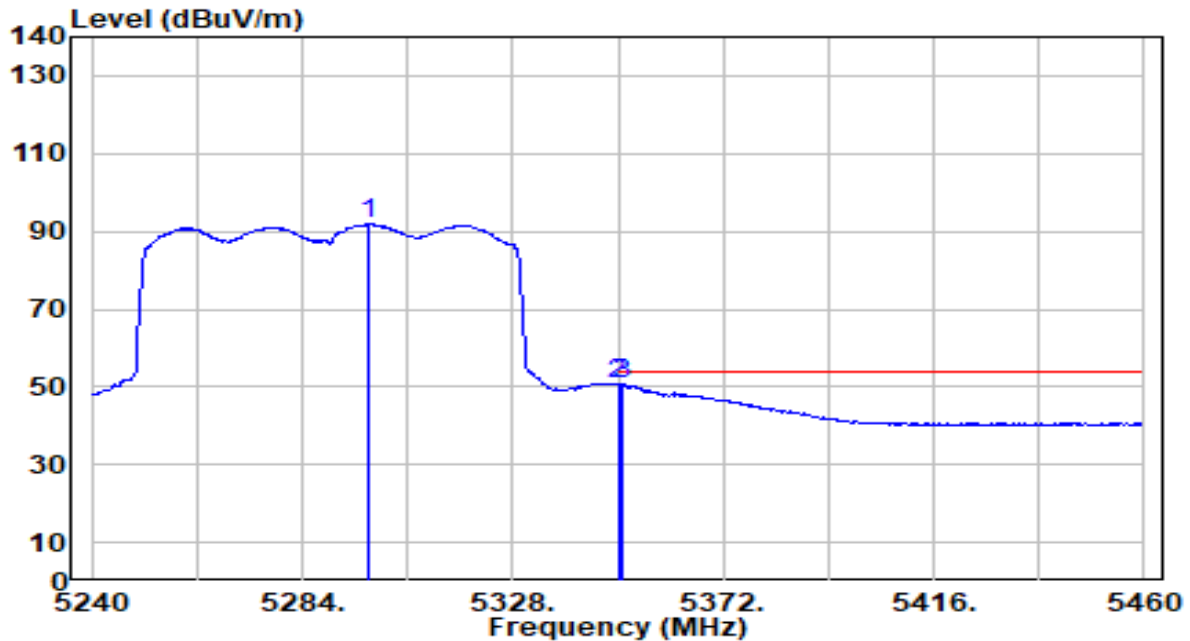


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5297.640	89.86	1.92	91.78	N/A	N/A	109	360	Average
2	*	5350.000	49.07	1.90	50.97	-3.03	54.00	109	360	Average
3		5351.100	49.00	1.90	50.91	-3.09	54.00	109	360	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	By Notebook PC

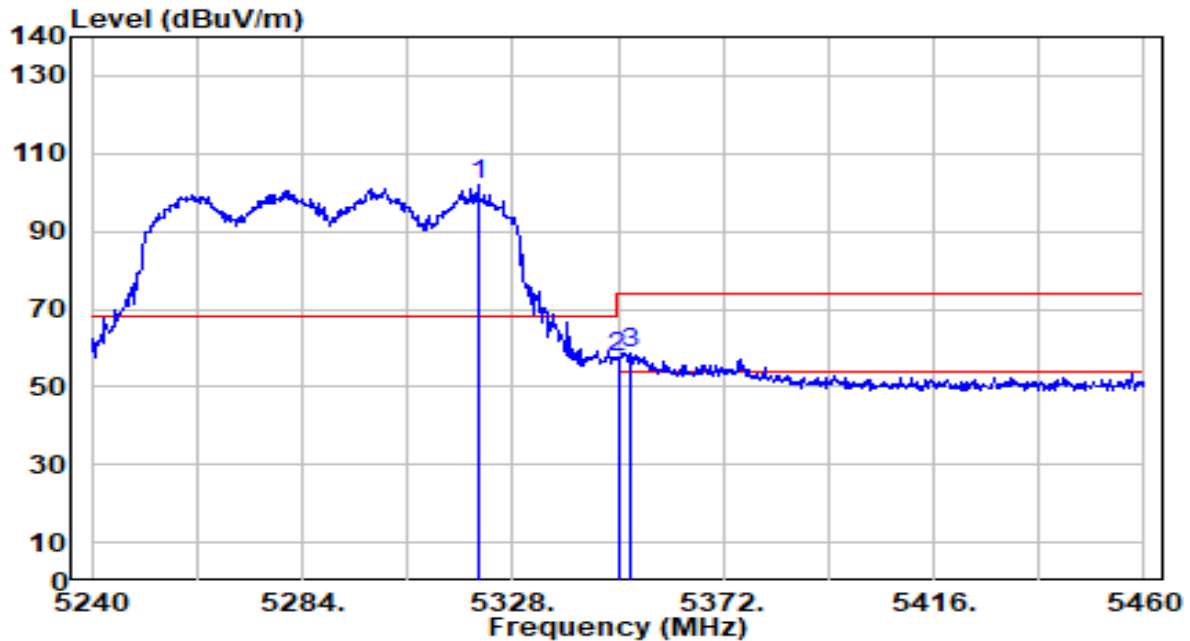


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5320.740	100.08	1.91	101.99	N/A	N/A	119	270	Peak
2	5350.000	55.55	1.90	57.45	-16.55	74.00	119	270	Peak
3	* 5352.420	56.92	1.90	58.82	-15.18	74.00	119	270	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-11
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	By Notebook PC

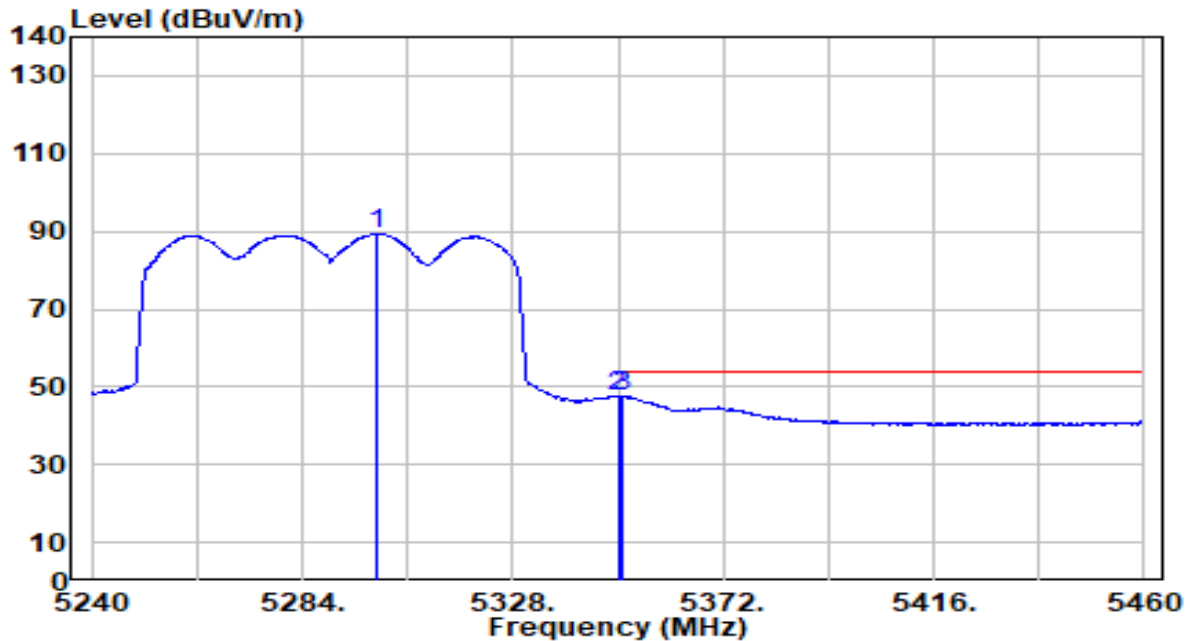


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5299.400	87.50	1.92	89.42	N/A	N/A	119	270	Average
2	5350.000	45.53	1.90	47.43	-6.57	54.00	119	270	Average
3	* 5350.660	45.58	1.90	47.48	-6.52	54.00	119	270	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-15
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	By Notebook PC

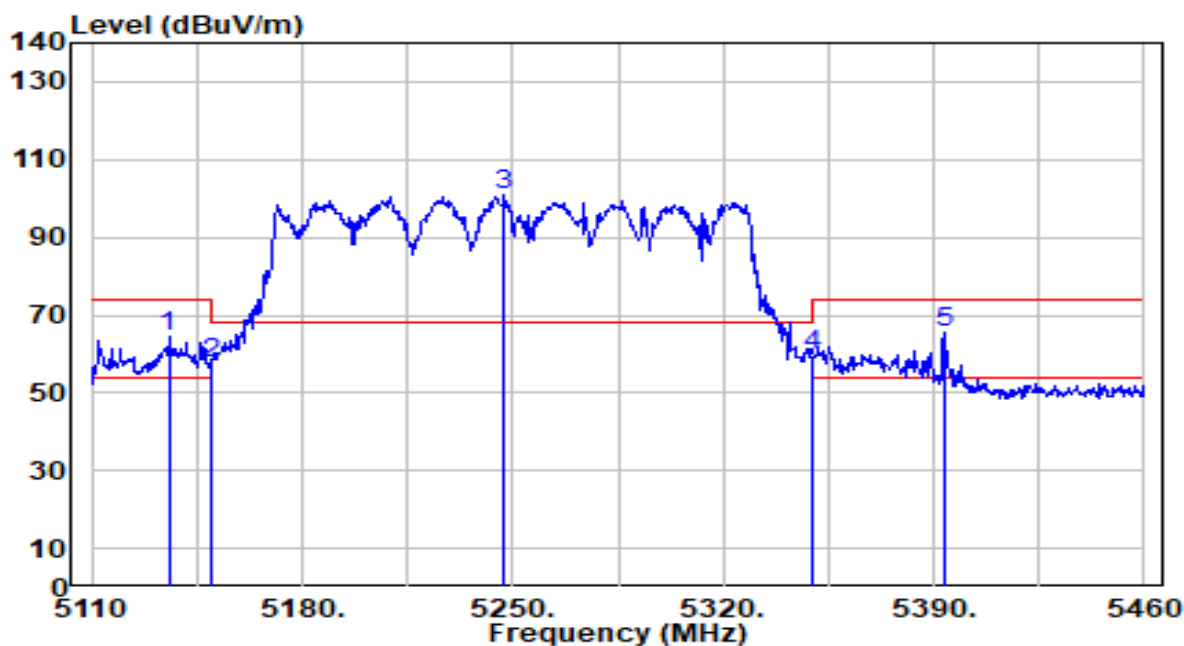

No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5135.550	62.26	1.93	64.19	-9.81	74.00	187	110	Peak
2	5150.000	55.79	1.94	57.73	-16.27	74.00	187	110	Peak
3	5247.200	98.97	1.95	100.91	N/A	N/A	187	110	Peak
4	5350.000	57.81	1.90	59.72	-14.28	74.00	187	110	Peak
5	* 5393.500	63.64	1.89	65.53	-8.47	74.00	187	110	Peak

Note:


1. " *", means this data is the worst emission level.

2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.

3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).

4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-15
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	By Notebook PC

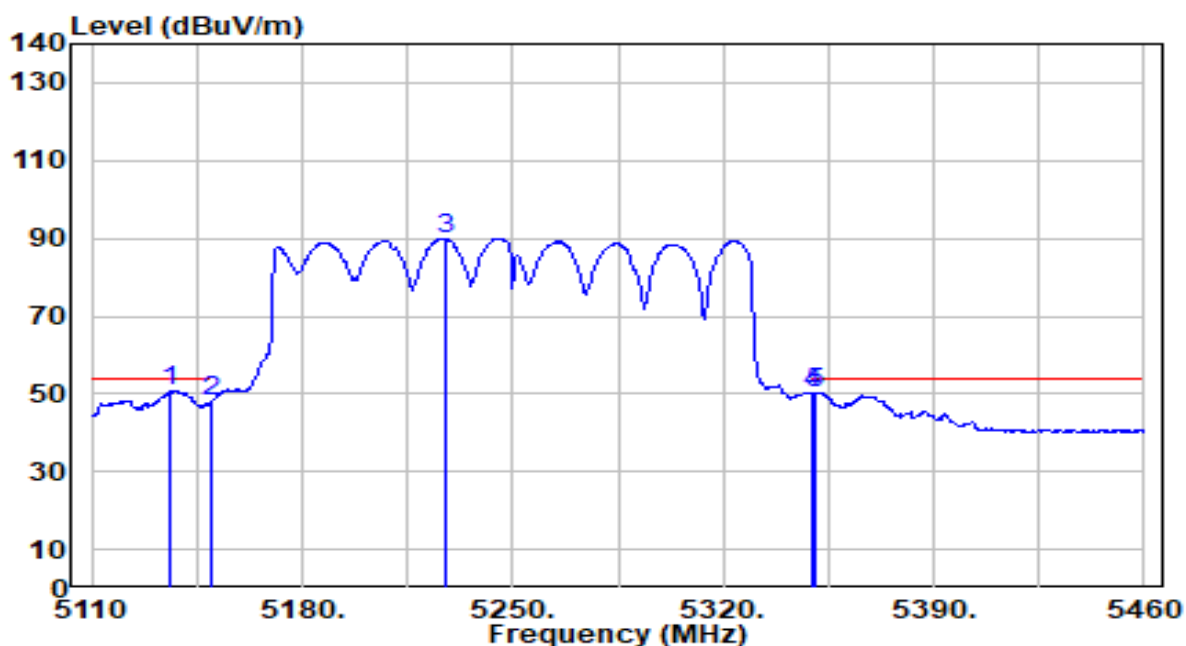

No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5136.250	48.90	1.93	50.82	-3.18	54.00	187	110	Average
2		5150.000	46.34	1.94	48.28	-5.72	54.00	187	110	Average
3		5227.600	88.00	1.96	89.95	N/A	N/A	187	110	Average
4		5350.000	48.49	1.90	50.39	-3.61	54.00	187	110	Average
5		5350.800	48.50	1.90	50.40	-3.60	54.00	187	110	Average

Note:


1. " *", means this data is the worst emission level.

2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.

3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-15
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	By Notebook PC

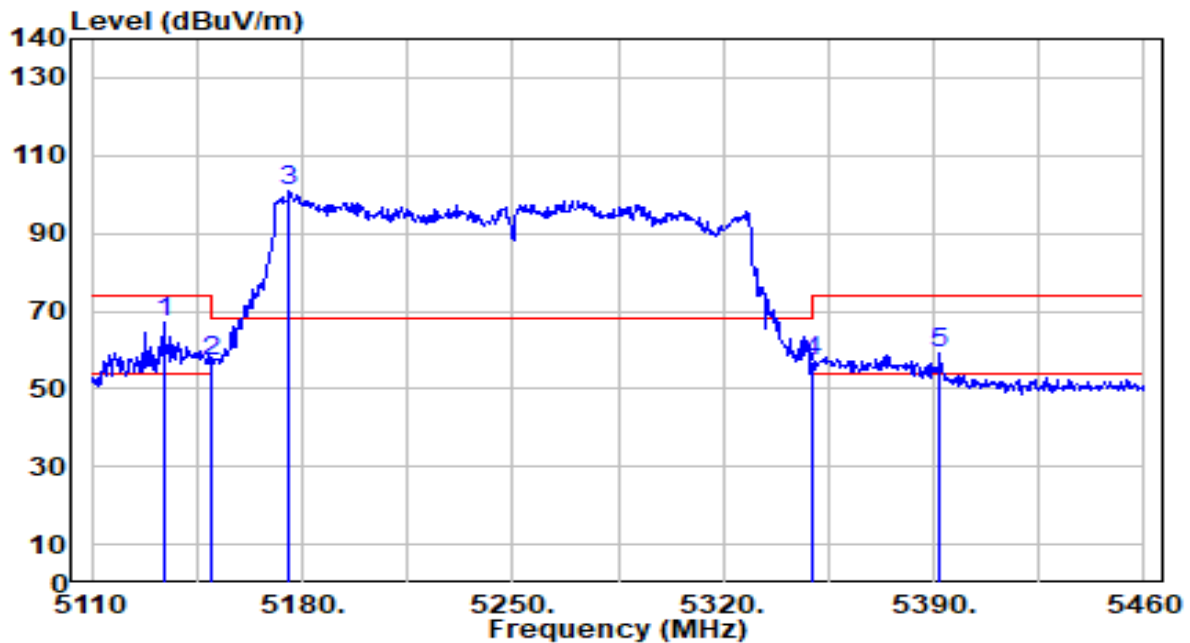

No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5133.800	65.13	1.93	67.06	-6.94	74.00	324	60	Peak
2		5150.000	54.86	1.94	56.80	-17.20	74.00	324	60	Peak
3		5175.800	98.81	1.95	100.76	N/A	N/A	324	60	Peak
4		5350.000	55.22	1.90	57.13	-16.87	74.00	324	60	Peak
5		5392.100	57.17	1.89	59.06	-14.94	74.00	324	60	Peak

Note:


1. " *", means this data is the worst emission level.

2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.

3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-15
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	By Notebook PC

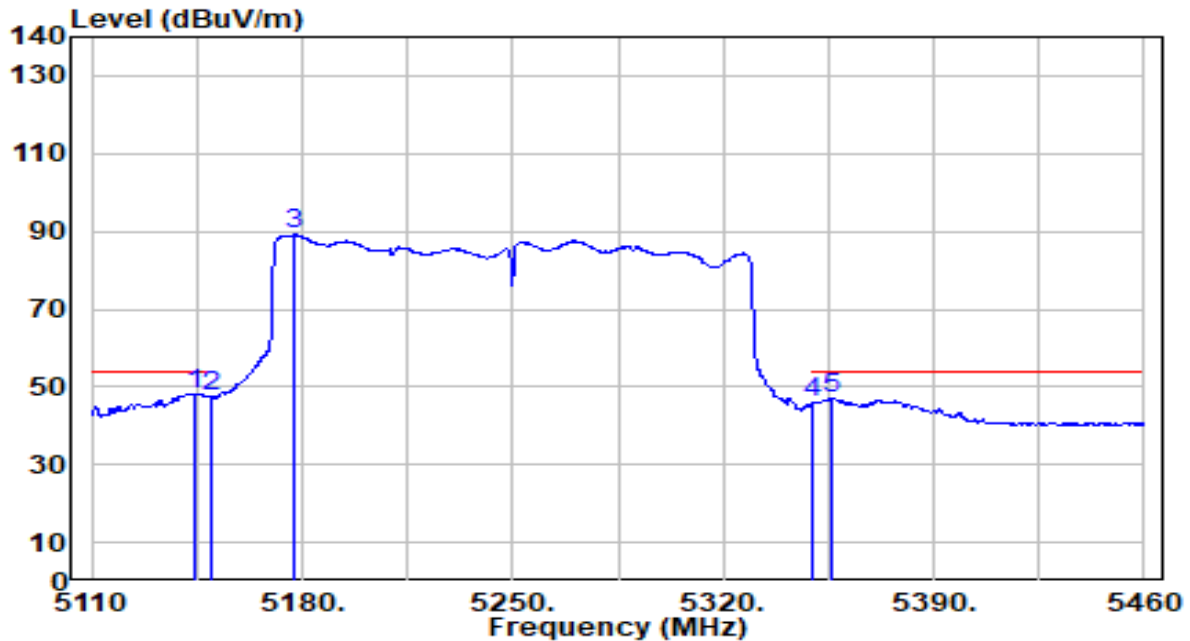

No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5143.950	46.40	1.93	48.33	-5.67	54.00	324	60	Average
2		5150.000	45.42	1.94	47.35	-6.65	54.00	324	60	Average
3		5177.200	87.18	1.95	89.14	N/A	N/A	324	60	Average
4		5350.000	43.96	1.90	45.86	-8.14	54.00	324	60	Average
5		5356.400	45.01	1.90	46.91	-7.09	54.00	324	60	Average

Note:

1. " *", means this data is the worst emission level.

2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.

3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.10.AC Conducted Emissions Measurement

7.10.1.Test Limit

FCC Part 15.207 Limits		
Frequency (MHz)	QP (dB μ V)	AV (dB μ V)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.


7.10.2.Test Procedure

The EUT was setup according to ANSI C63.4, 2009 and tested according to KDB 789033 for compliance to FCC 47CFR 15.247 requirements. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs) Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.

The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.


Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

7.10.3. Test Setup

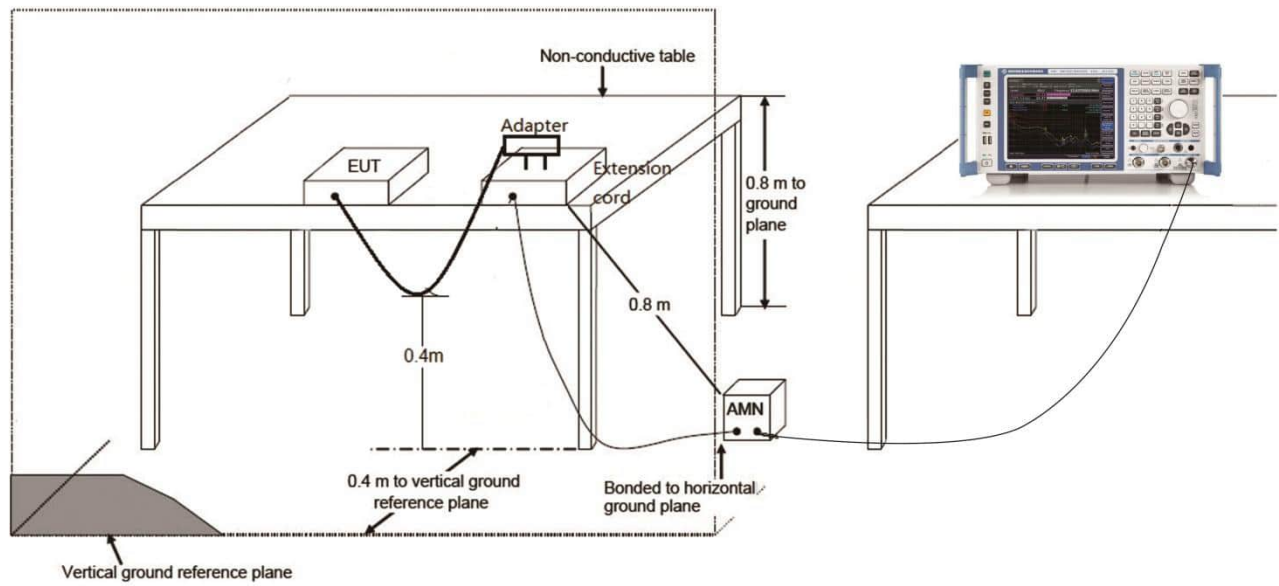

7.10.4.Test Result

EUT	Mobile Computer	Date of Test	2025-07-15
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	24°C /54%
Polarity	Line1	Site / Test Engineer	SR2 / Ryan
Test Mode	802.11ac-20MHz_TX_Band1_CH 40_ANT 6+7	Test Voltage	AC 120V/60Hz

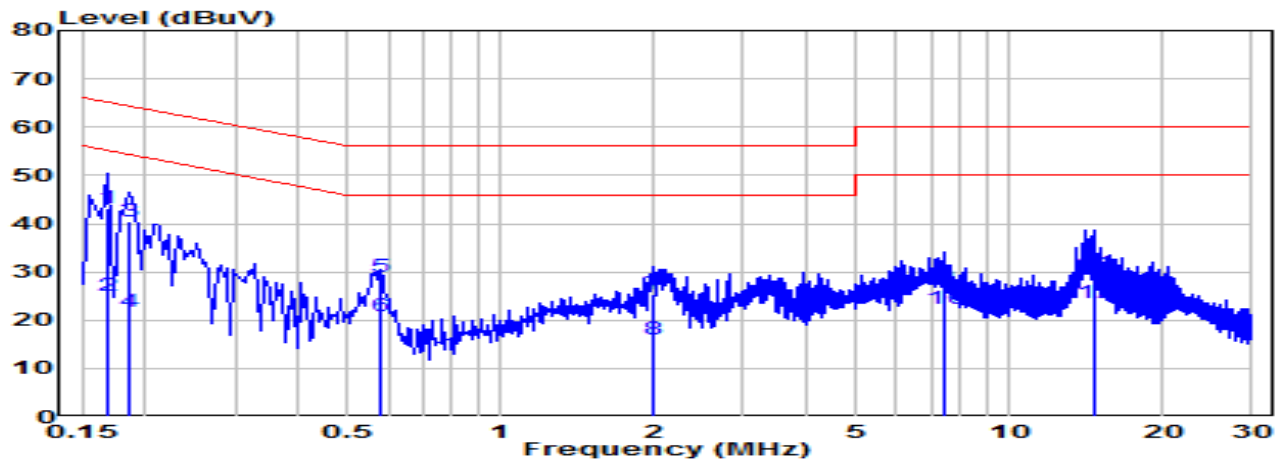


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	*	0.168	33.68	9.63	43.30	-21.75	65.06	QP
2	*	0.168	15.49	9.63	25.11	-29.95	55.06	Average
3		0.186	30.70	9.62	40.32	-23.89	64.21	QP
4		0.186	12.25	9.62	21.88	-32.33	54.21	Average
5		0.577	19.23	9.65	28.88	-27.12	56.00	QP
6		0.577	11.32	9.65	20.97	-25.03	46.00	Average
7		1.981	15.64	9.70	25.33	-30.67	56.00	QP
8		1.981	6.40	9.70	16.10	-29.90	46.00	Average
9		7.444	17.17	9.81	26.98	-33.02	60.00	QP
10		7.444	12.57	9.81	22.37	-27.63	50.00	Average
11		14.634	19.70	9.90	29.59	-30.41	60.00	QP
12		14.634	13.74	9.90	23.64	-26.36	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	Mobile Computer	Date of Test	2025-07-15
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	24°C /54%
Polarity	Neutral	Site / Test Engineer	SR2 / Ryan
Test Mode	802.11ac-20MHz_TX_Band1_CH 40_ANT 6+7	Test Voltage	AC 120V/60Hz

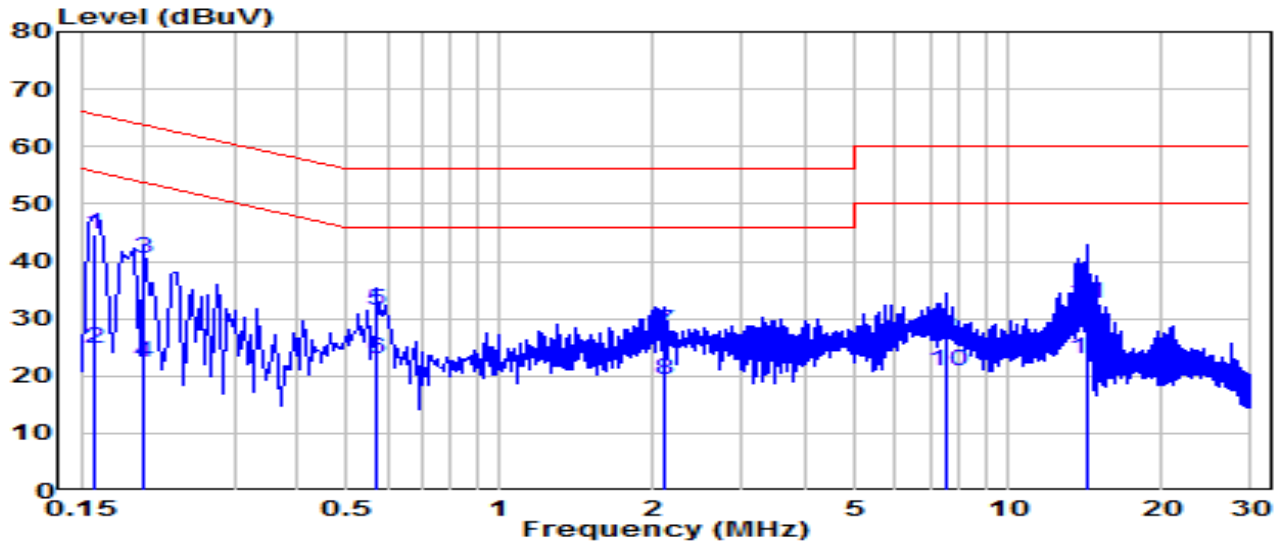

No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	*	0.159	35.03	9.63	44.66	-20.86	65.52	QP
2	*	0.159	15.05	9.63	24.67	-30.84	55.52	Average
3		0.199	30.71	9.62	40.33	-23.30	63.63	QP
4		0.199	12.83	9.62	22.45	-31.18	53.63	Average
5		0.573	21.70	9.65	31.35	-24.65	56.00	QP
6		0.573	13.18	9.65	22.82	-23.18	46.00	Average
7		2.121	18.15	9.70	27.85	-28.15	56.00	QP
8		2.121	9.50	9.70	19.21	-26.79	46.00	Average
9		7.511	17.06	9.81	26.87	-33.13	60.00	QP
10		7.511	11.16	9.81	20.97	-29.03	50.00	Average
11		14.234	22.64	9.91	32.55	-27.45	60.00	QP
12		14.234	13.18	9.91	23.09	-26.91	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

8. CONCLUSION

The data collected relate only the item(s) tested and show that the device is in compliance with Part 15E of the FCC Rules.

Appendix A : Test Setup Photograph

Refer to “2505TW0108-UT” file.

Appendix B : EUT Photograph

Refer to “2505TW0108-UE” file.

Appendix C : Internal Photograph

Refer to “2505TW0108-UI” file.

_____ The End _____