

802.11a Power Spectral Density - Ant 7

Channel 169 (5845MHz)



Channel 173 (5865MHz)



Channel 177 (5885MHz)



802.11ac-VHT20 Power Spectral Density - Ant 7

Channel 169 (5845MHz)



Channel 173 (5865MHz)



Channel 177 (5885MHz)



802.11ac-VHT40 Power Spectral Density - Ant 7

Channel 167 (5835MHz)




Channel 175 (5875MHz)



802.11ac-VHT80 Power Spectral Density - Ant 7

Channel 171 (5855MHz)

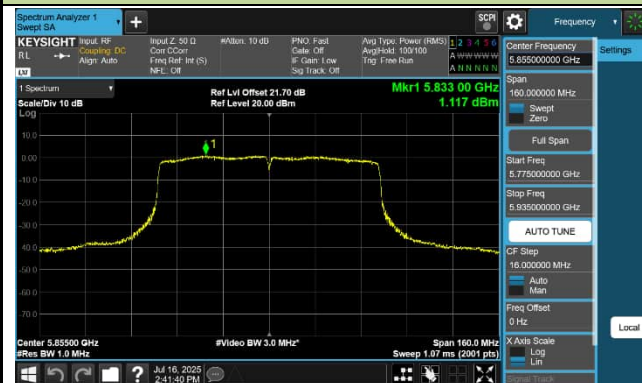

802.11ac-VHT160 Power Spectral Density - Ant 7

Channel 163 (5815MHz)



802.11be-EHT20 Power Spectral Density - Ant 7

Channel 169 (5845MHz)



Channel 173 (5865MHz)



Channel 177 (5885MHz)



802.11be-EHT40 Power Spectral Density - Ant 7

Channel 167 (5835MHz)




Channel 175 (5875MHz)




802.11be-EHT80 Power Spectral Density - Ant 7

Channel 171 (5855MHz)

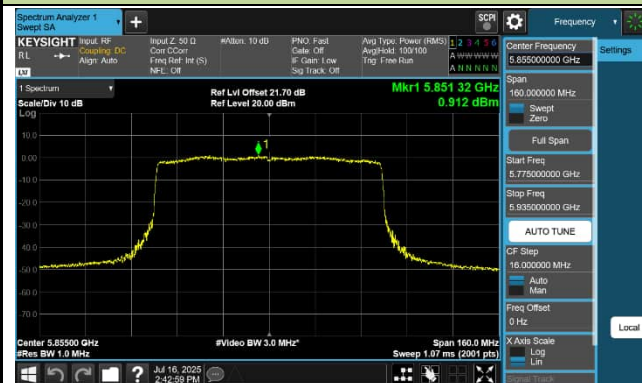

802.11be-EHT160 Power Spectral Density - Ant 7

Channel 163 (5815MHz)

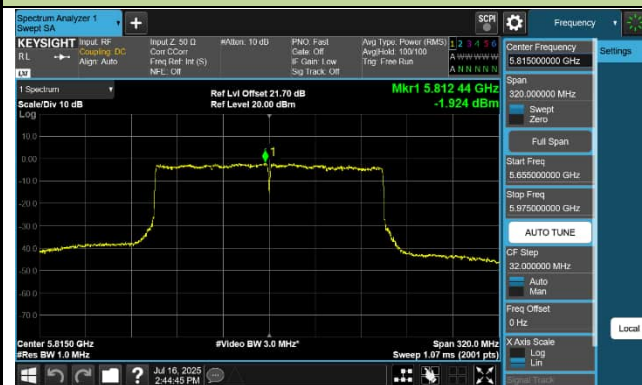

802.11ax-HE20 Power Spectral Density - Ant 7

26 Tone_RU0_CH169 (5845MHz)



26 Tone_RU8_CH177 (5885MHz)



52 Tone_RU74_CH169 (5845MHz)



52 Tone_RU77_CH177 (5885MHz)



106 Tone_RU106_CH169 (5845MHz)




106 Tone_RU107_CH177 (5885MHz)



242 Tone_RU122_CH169 (5845MHz)



242 Tone_RU122_CH177 (5885MHz)

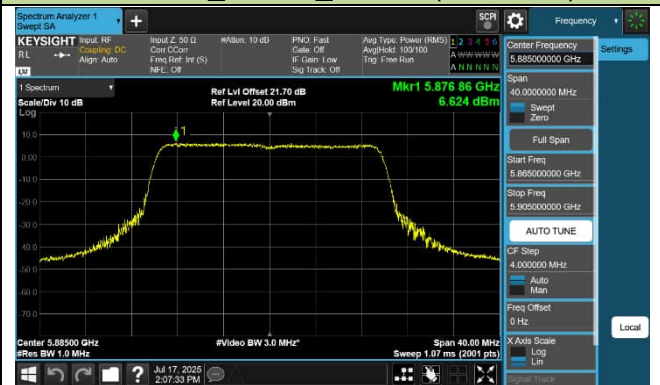

802.11be-EHT20 Power Spectral Density - Ant 7


52+26 Tone_MRU1_CH169 (5845MHz)



52+26 Tone_MRU1_CH173 (5865MHz)



52+26 Tone_MRU3_CH177 (5885MHz)

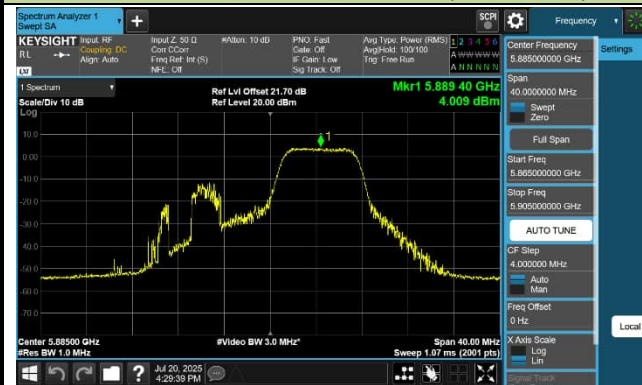

102+26 Tone_MRU1_CH169 (5845MHz)



102+26 Tone_MRU1_CH173 (5865MHz)



102+26 Tone_MRU2_CH177 (5885MHz)



802.11be-EHT80 Power Spectral Density - Ant 7

484+242 Tone_MRU1_CH171 (5855MHz)



802.11be-EHT160 Power Spectral Density - Ant 7

996+484 Tone_MRU1_CH163 (5815MHz)



802.11be-EHT80 Power Spectral Density - Ant 7


484+242 Tone_PUN1_CH171 (5855MHz)



484+242 Tone_PUN2_CH171 (5855MHz)



484+242 Tone_PUN3_CH171 (5855MHz)

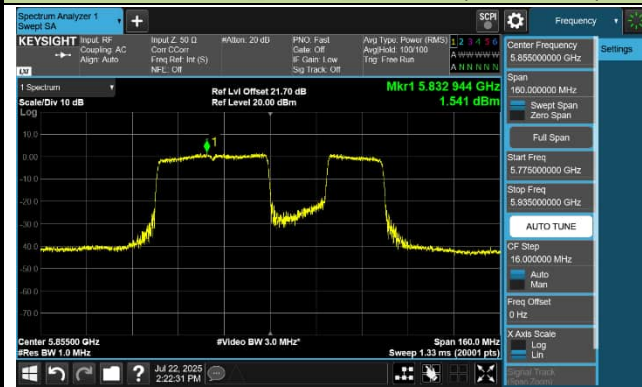


484+242 Tone_PUN4_CH171 (5855MHz)



802.11be-EHT160 Power Spectral Density - Ant 7

996+484 Tone_40-PUN1_CH163 (5815MHz)

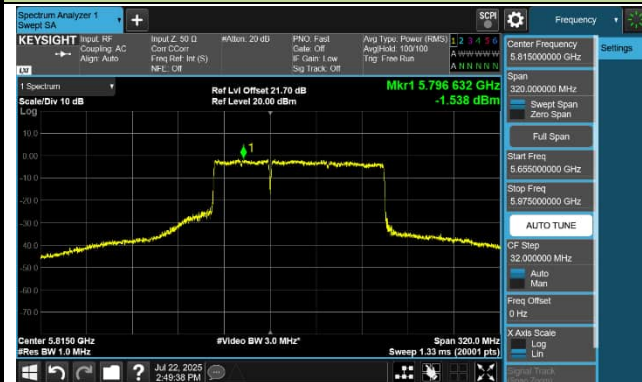

996+484 Tone_40-PUN2_CH163 (5815MHz)



996+484 Tone_40-PUN3_CH163 (5815MHz)



996+484 Tone_40-PUN4_CH163 (5815MHz)




802.11be-EHT160 Power Spectral Density - Ant 7

996+484+242 Tone_20-PUN1_CH163
(5815MHz)


996+484+242 Tone_20-PUN2_CH163
(5815MHz)

996+484+242 Tone_20-PUN3_CH163
(5815MHz)

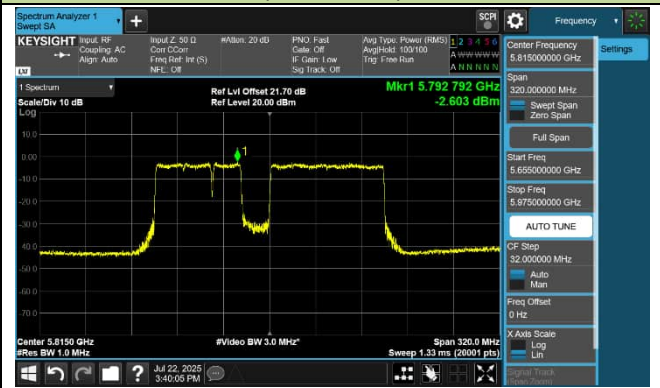996+484+242 Tone_20-PUN4_CH163
(5815MHz)


802.11be-EHT160 Power Spectral Density - Ant 7


996+484+242 Tone_20-PUN5_CH163
(5815MHz)

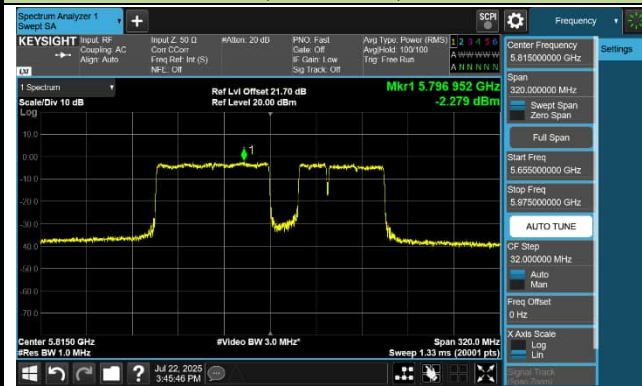


996+484+242 Tone_20-PUN6_CH163
(5815MHz)



996+484+242 Tone_20-PUN7_CH163
(5815MHz)

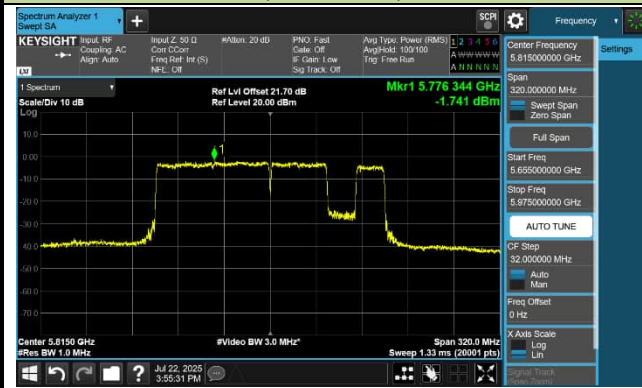

996+484+242 Tone_20-PUN8_CH163
(5815MHz)

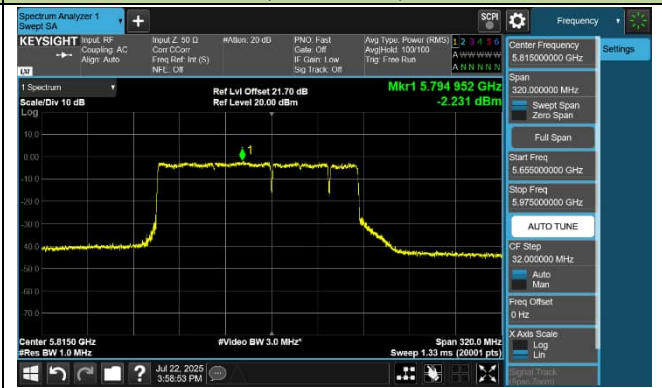

7.6. Frequency Stability Measurement

7.6.1. Test Limit

Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

7.6.2. Test Procedure

Frequency Stability Under Temperature Variations:


The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to highest. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C decreased per stage until the lowest temperature reached.

Frequency Stability Under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.

7.6.3. Test Procedure

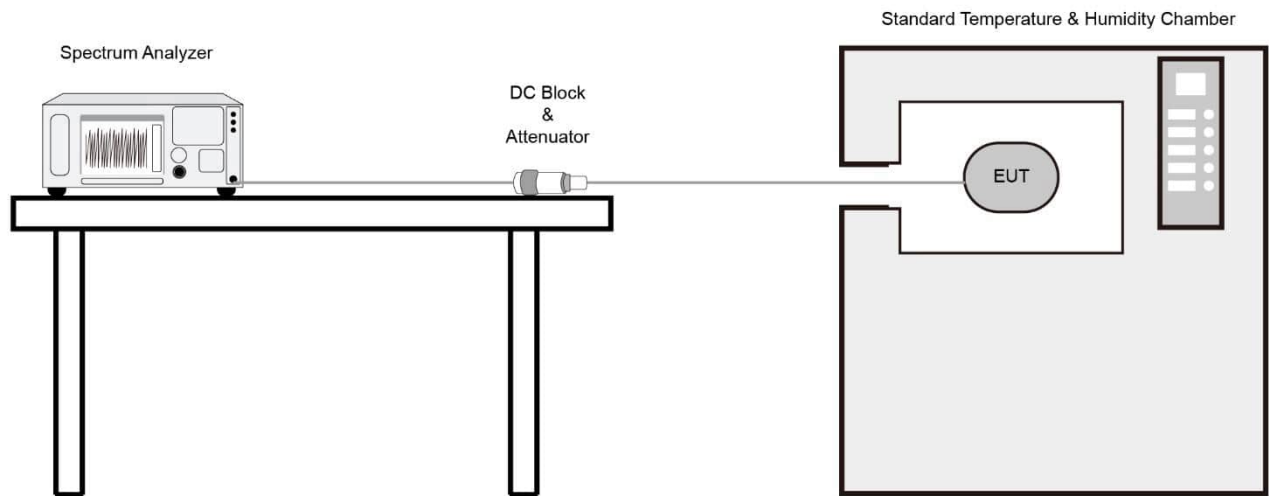

7.6.4. Test Result

Test Site	SR3	Test Engineer	Marvin
Test Date	2025/7/17		
Test Mode	5885MHz (Carrier Mode)		

Voltage (%)	Power (DC)	Temp (°C)	Frequency Tolerance (ppm)			
			0 minutes	2 minutes	5 minutes	10 minutes
100	DC 3.8V	- 30	-7.25	-7.29	-7.29	-7.25
		- 20	-7.25	-7.37	-7.34	-7.37
		- 10	-7.22	-7.32	-7.34	-7.37
		0	-7.34	-7.41	-7.41	-7.43
		+ 10	-7.15	-7.27	-7.31	-7.31
		+ 20	-7.32	-7.43	-7.46	-7.43
		+ 30	-7.24	-7.32	-7.29	-7.25
		+ 40	-7.20	-7.22	-7.22	-7.22
		+ 50	-7.07	-7.12	-7.19	-7.27
115	DC 4.4V	+ 20	-7.25	-7.29	-7.29	-7.25
85	DC 3.2V	+ 20	-7.25	-7.37	-7.34	-7.37

Note: Frequency Tolerance (ppm) = {[Measured Frequency (Hz) - Declared Frequency (Hz)] / Declared Frequency (Hz)} *10⁶.

7.7. Radiated Spurious Emission Measurement

7.7.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.7.2. Test Procedure Used

KDB 789033 D02v02r01- Section G

7.7.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
>1000 MHz	1 MHz

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.
If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

7.7.4. Test Setup

Below 1GHz Test Setup:

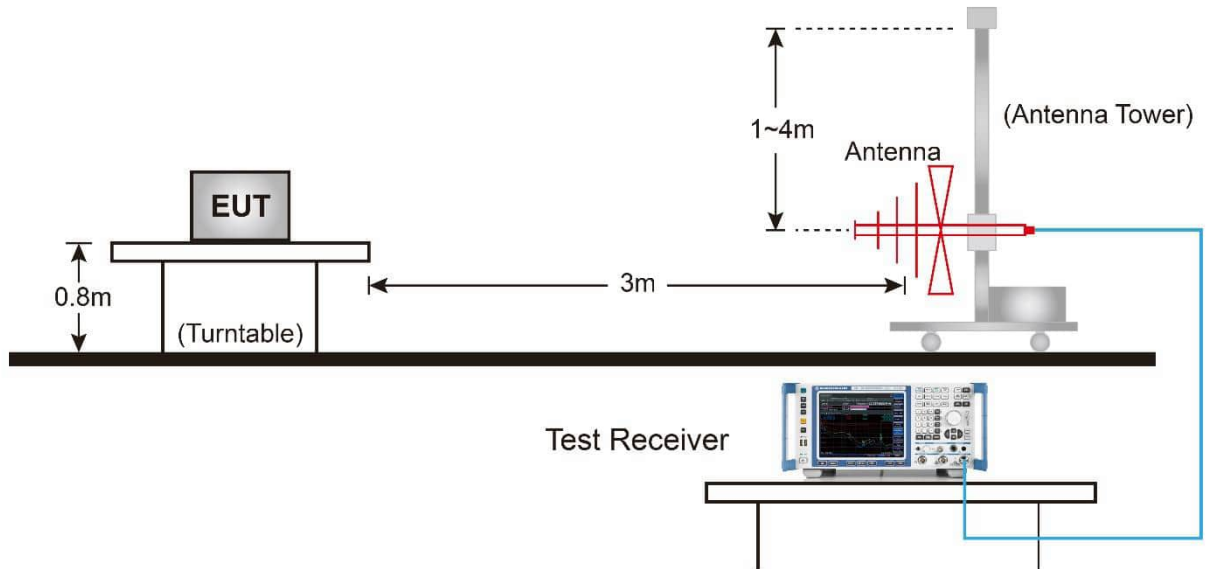


Above 1GHz Test Setup:

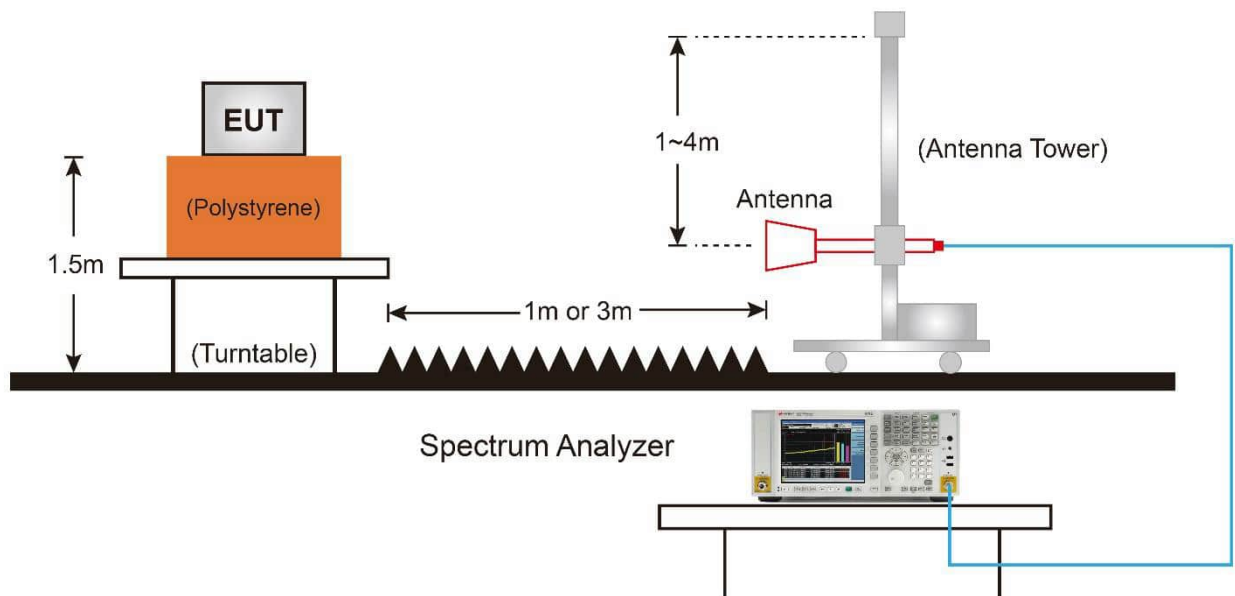

7.7.5. Test Result

EUT	Mobile Computer	Date of Test	2025-07-17
Factor	VULB 9162	Temp. / Humidity	23°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Tim
Test Mode	802.11ac-20MHz_TX_5.9G Band_CH 173_ANT 6+7	Test Voltage	By Notebook PC

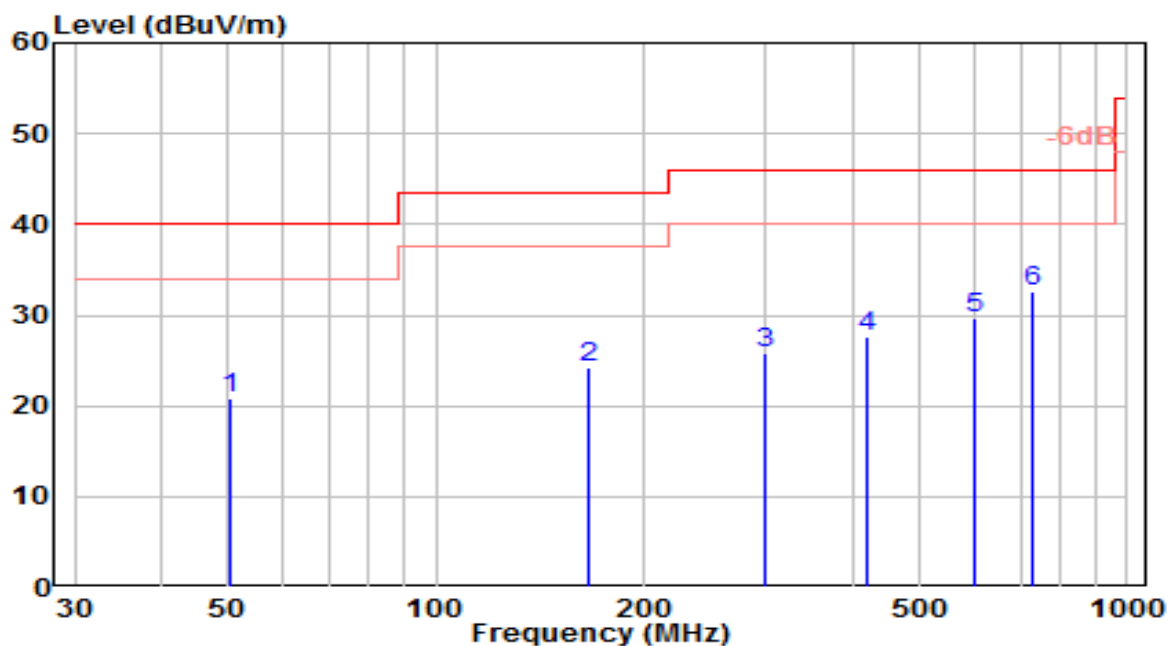


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	50.370	-0.41	21.19	20.78	-19.22	40.00	100	170	QP
2	165.800	8.01	16.22	24.23	-19.27	43.50	150	235	QP
3	299.660	4.63	21.15	25.77	-20.23	46.00	100	305	QP
4	418.970	3.65	24.00	27.65	-18.35	46.00	150	265	QP
5	599.390	2.22	27.48	29.70	-16.30	46.00	100	200	QP
6	* 732.280	3.28	29.28	32.55	-13.45	46.00	150	295	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. The amplitude of radiated emissions (frequency range from 9kHz to 30MHz) is that proximity to ambient noise, which also are attenuated more than 20dB below the permissible value. Therefore, the data is not presented in the report.

EUT	Mobile Computer	Date of Test	2025-07-17
Factor	VULB 9162	Temp. / Humidity	23°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Tim
Test Mode	802.11ac-20MHz_TX_5.9G Band_CH 173_ANT 6+7	Test Voltage	By Notebook PC

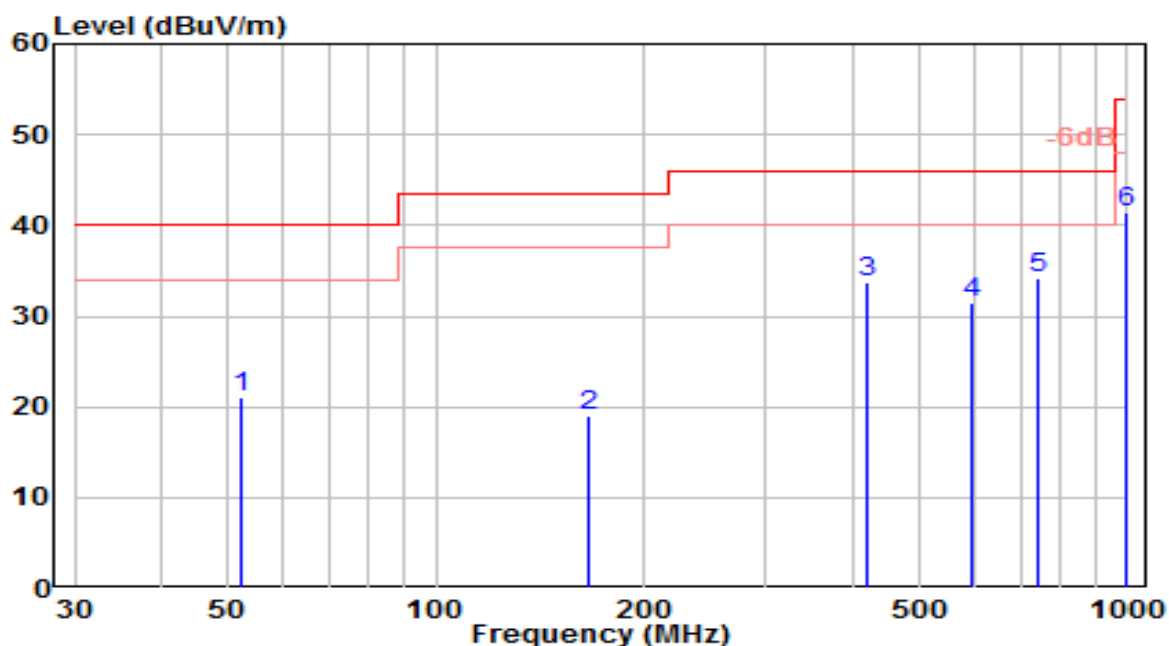


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	52.310	0.07	20.93	21.00	-19.00	40.00	100	90	QP
2	165.800	2.80	16.22	19.02	-24.48	43.50	100	325	QP
3	418.970	9.78	24.00	33.77	-12.23	46.00	100	215	QP
4	598.420	3.99	27.46	31.45	-14.55	46.00	100	130	QP
5	* 745.860	4.73	29.52	34.25	-11.75	46.00	100	280	QP
6	998.060	8.84	32.56	41.39	-12.61	54.00	100	170	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. The amplitude of radiated emissions (frequency range from 9kHz to 30MHz) is that proximity to ambient noise, which also are attenuated more than 20dB below the permissible value. Therefore, the data is not presented in the report.

EUT	Mobile Computer	Date of Test	2025-07-02
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11a_TX_5.9G Band_CH 163_ANT 6+7	Test Voltage	By Notebook PC

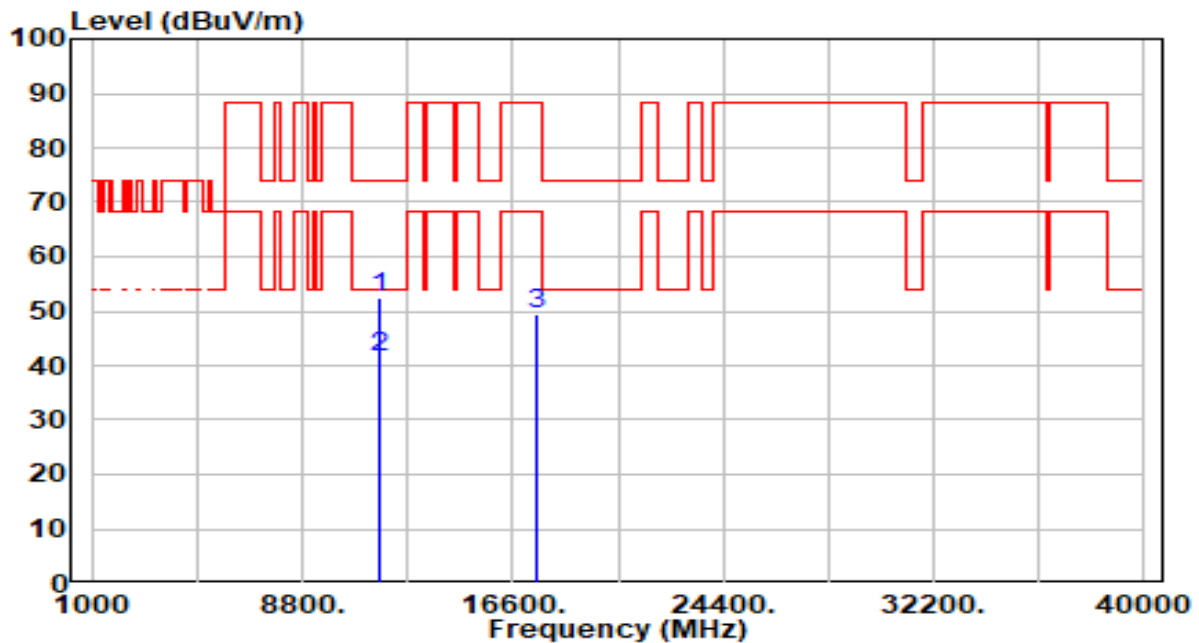


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11690.000	45.17	7.21	52.38	-21.62	74.00	300	171	Peak
2	*	11690.000	34.47	7.21	41.68	-12.32	54.00	300	171	Average
3		17535.000	41.87	7.66	49.54	-38.66	88.20	300	208	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-02
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11a_TX_5.9G Band_CH 163_ANT 6+7	Test Voltage	By Notebook PC

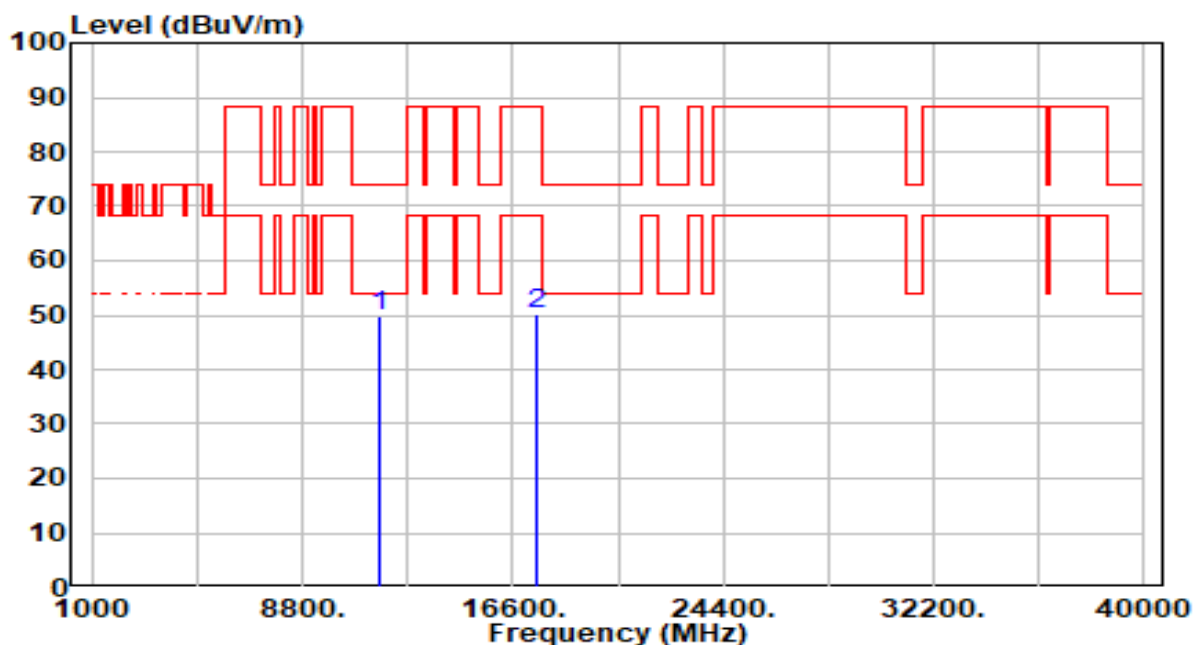


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11690.000	42.70	7.21	49.91	-24.09	74.00	300	0	Peak
2		17535.000	42.53	7.66	50.20	-38.00	88.20	300	147	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-02
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11a_TX_5.9G Band_CH 173_ANT 6+7	Test Voltage	By Notebook PC

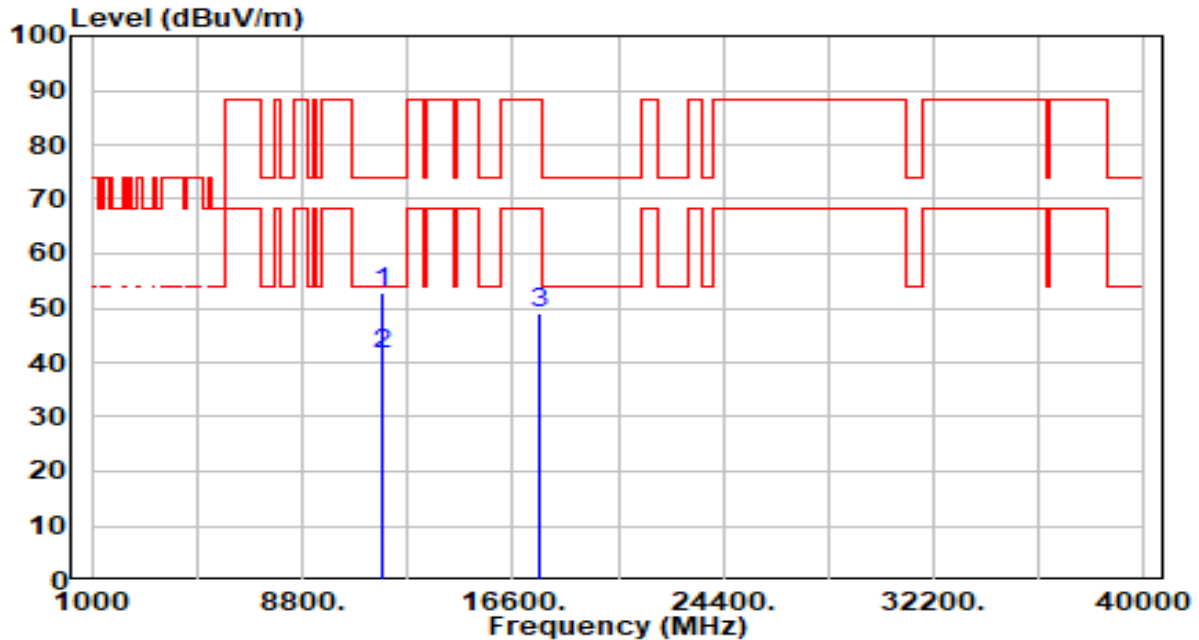


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11730.000	45.68	7.21	52.89	-21.11	74.00	300	175	Peak
2	*	11730.000	34.26	7.21	41.47	-12.53	54.00	300	175	Average
3		17595.000	41.08	7.93	49.01	-39.19	88.20	300	38	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-02
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11a_TX_5.9G Band_CH 173_ANT 6+7	Test Voltage	By Notebook PC

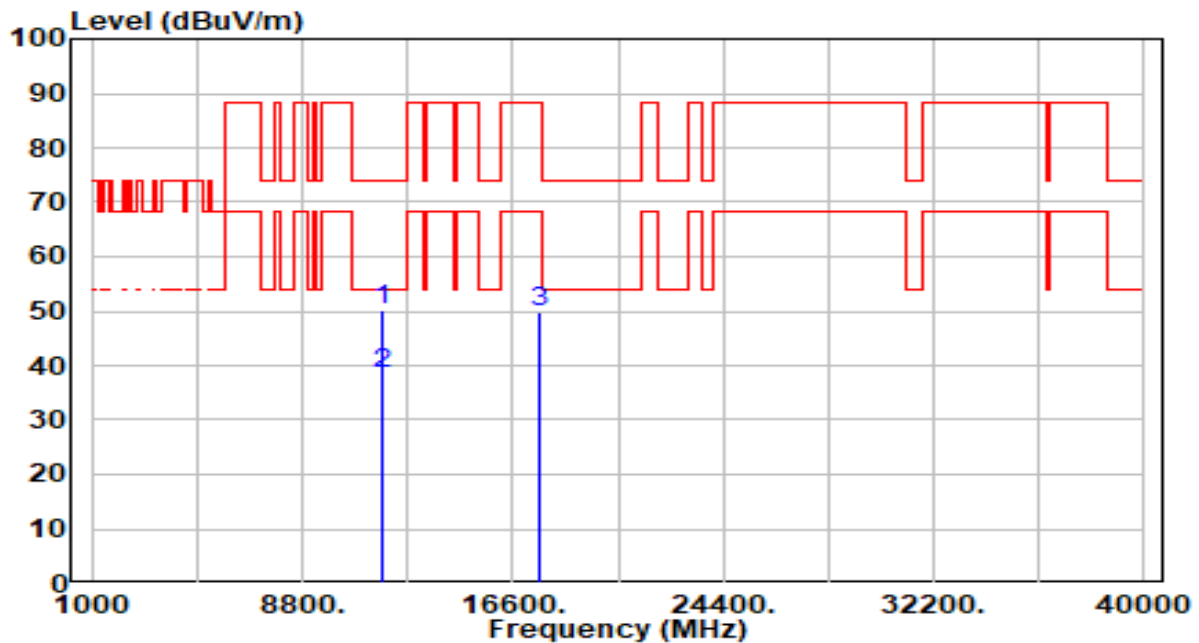


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11730.000	42.93	7.21	50.14	-23.86	74.00	300	218	Peak
2	*	11730.000	31.41	7.21	38.62	-15.38	54.00	300	218	Average
3		17595.000	41.98	7.93	49.91	-38.29	88.20	300	204	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-02
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11a_TX_5.9G Band_CH 177_ANT 6+7	Test Voltage	By Notebook PC

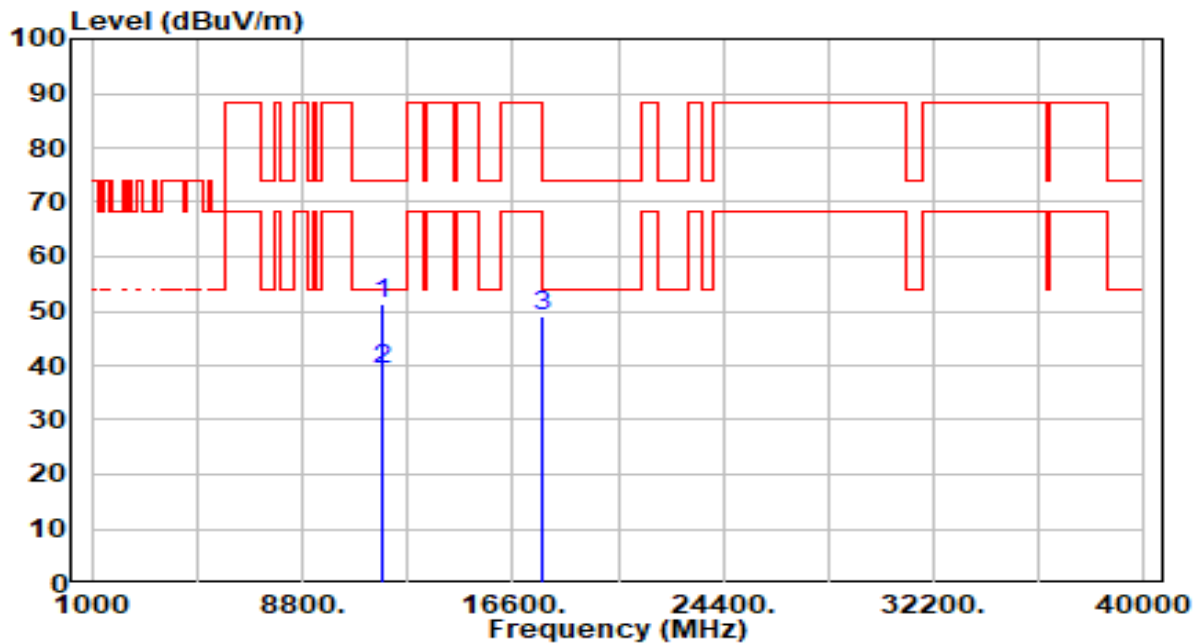


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11770.000	44.26	7.22	51.47	-22.53	74.00	300	185	Peak
2	*	11770.000	32.19	7.22	39.41	-14.59	54.00	300	185	Average
3		17655.000	41.16	8.01	49.17	-39.03	88.20	300	188	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-02
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11a_TX_5.9G Band_CH 177_ANT 6+7	Test Voltage	By Notebook PC

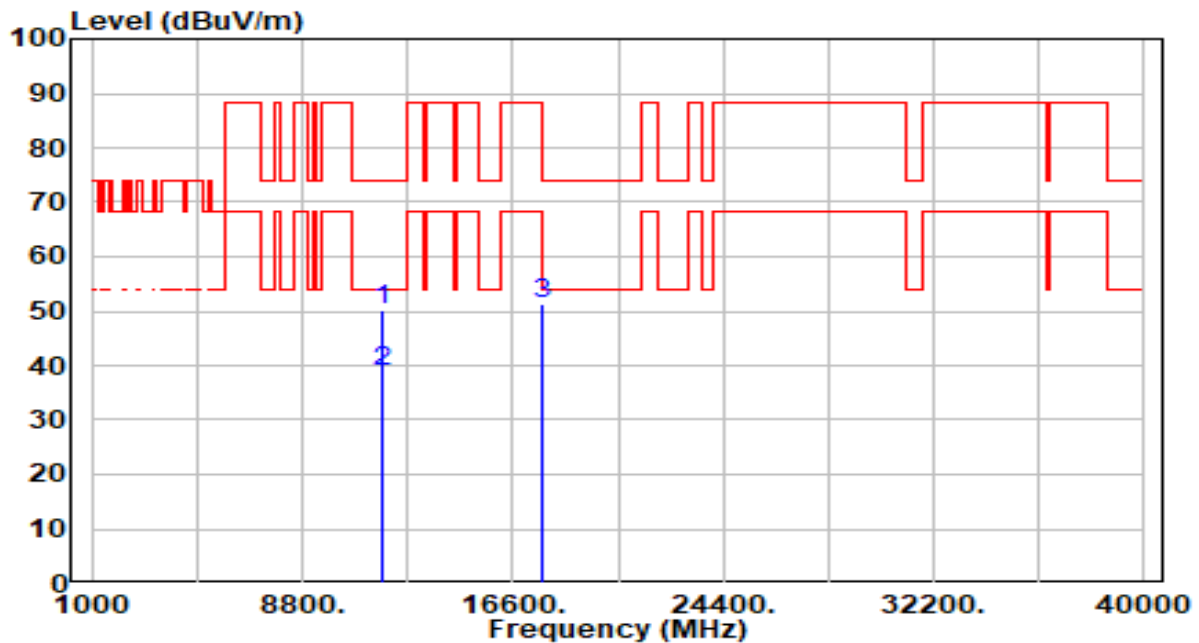


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11770.000	42.86	7.22	50.07	-23.93	74.00	300	190	Peak
2	*	11770.000	31.58	7.22	38.80	-15.20	54.00	300	190	Average
3		17655.000	43.40	8.01	51.41	-36.79	88.20	300	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-02
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-20MHz_TX_5.9G Band_CH 169_ANT 6+7	Test Voltage	By Notebook PC

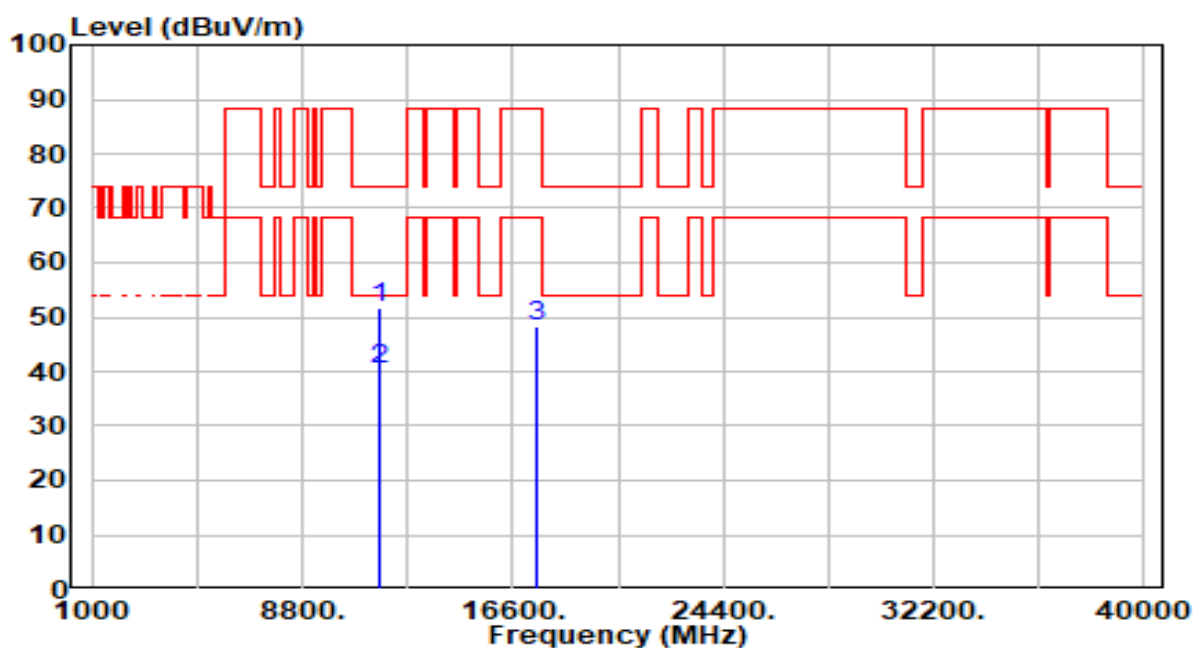


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11690.000	44.48	7.21	51.69	-22.31	74.00	300	202	Peak
2	*	11690.000	33.09	7.21	40.30	-13.70	54.00	300	202	Average
3		17535.000	40.59	7.66	48.25	-39.95	88.20	300	285	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-02
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-20MHz_TX_5.9G Band_CH 169_ANT 6+7	Test Voltage	By Notebook PC

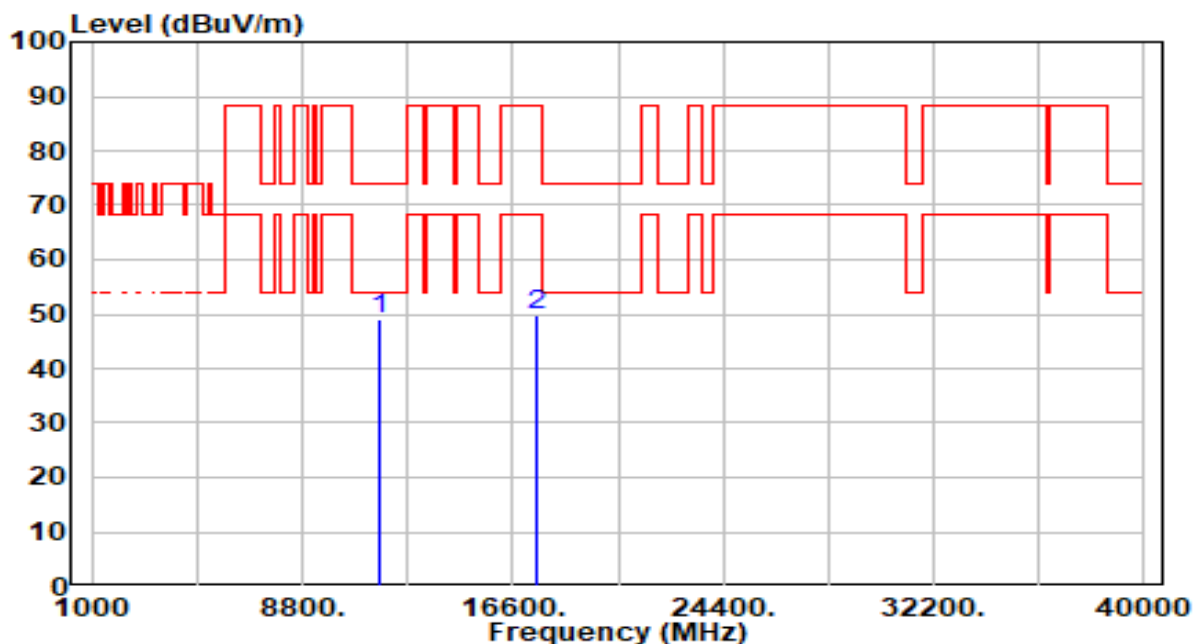


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11690.000	41.79	7.21	48.99	-25.01	74.00	300	66	Peak
2		17535.000	41.98	7.66	49.65	-38.55	88.20	300	177	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-02
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-20MHz_TX_5.9G Band_CH 173_ANT 6+7	Test Voltage	By Notebook PC

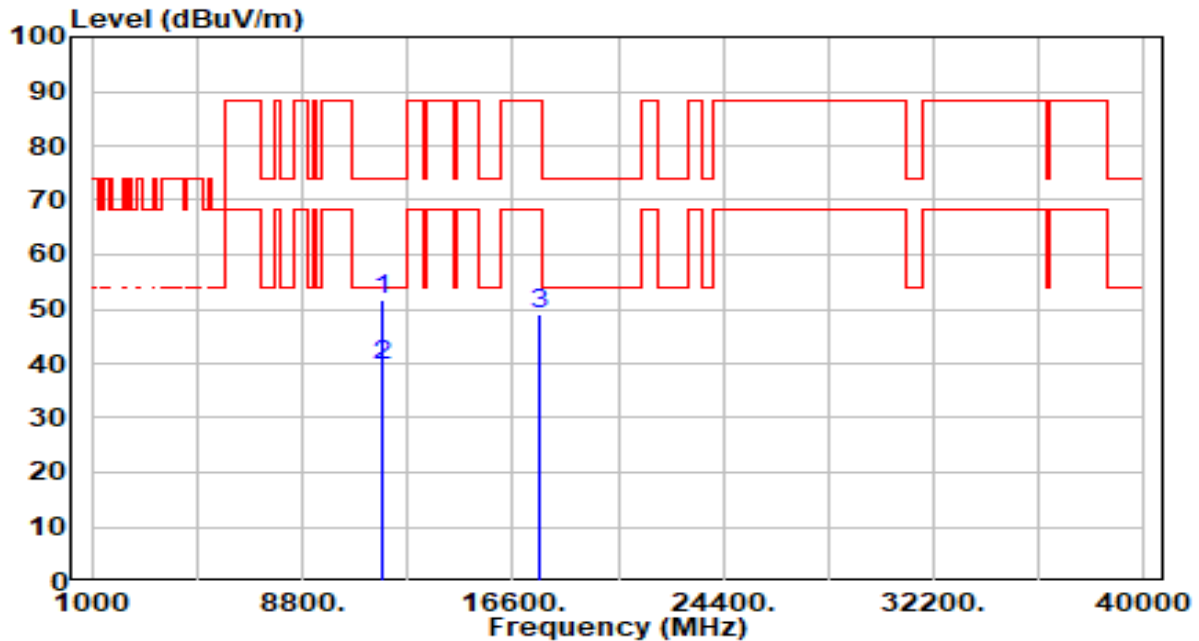


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11730.000	44.33	7.21	51.54	-22.46	74.00	300	198	Peak
2	*	11730.000	32.52	7.21	39.73	-14.27	54.00	300	198	Average
3		17595.000	41.10	7.93	49.03	-39.17	88.20	300	227	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-02
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-20MHz_TX_5.9G Band_CH 173_ANT 6+7	Test Voltage	By Notebook PC

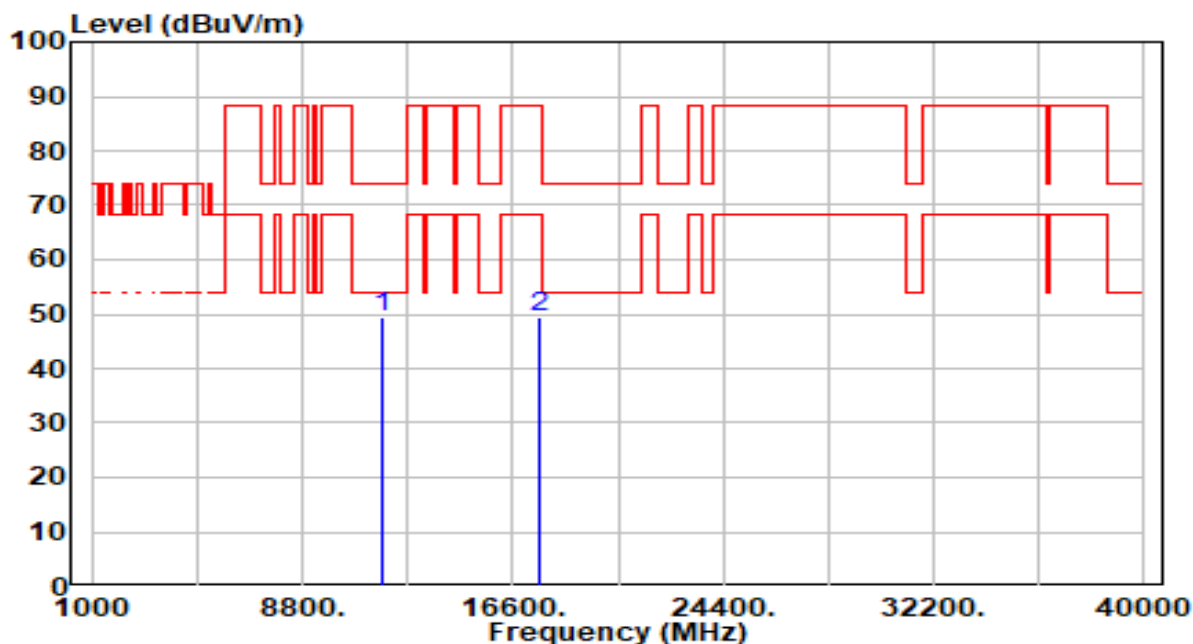


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11730.000	42.14	7.21	49.35	-24.65	74.00	300	11	Peak
2		17595.000	41.68	7.93	49.61	-38.59	88.20	300	34	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-02
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-20MHz_TX_5.9G Band_CH 177_ANT 6+7	Test Voltage	By Notebook PC

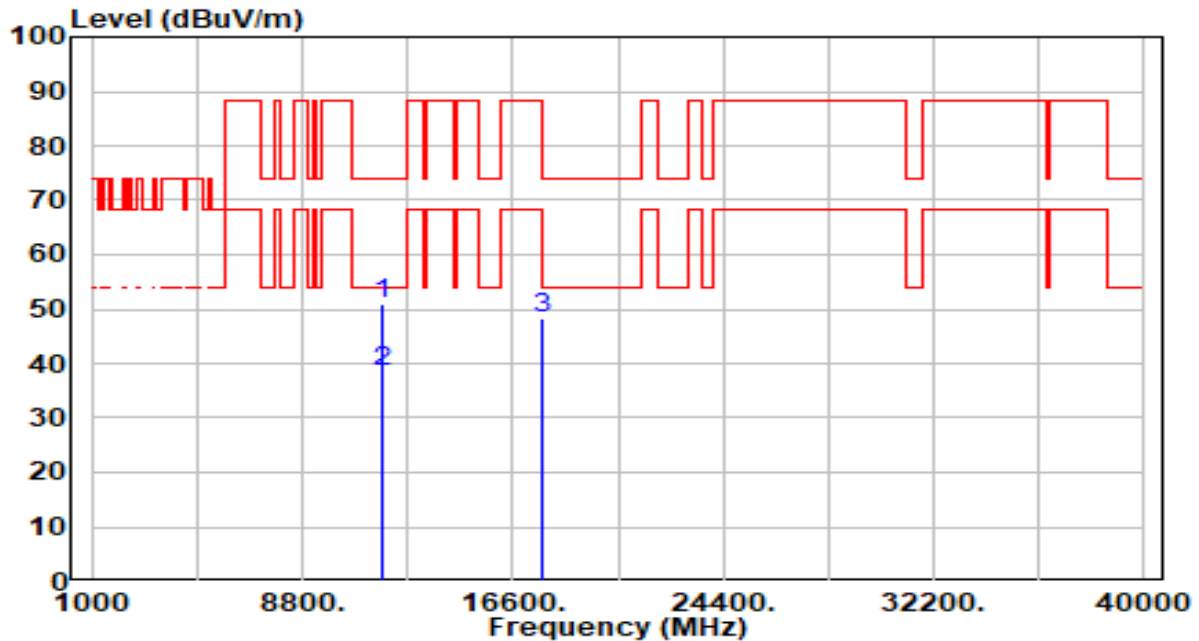


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11770.000	43.75	7.22	50.96	-23.04	74.00	300	187	Peak
2	*	11770.000	31.43	7.22	38.65	-15.35	54.00	300	187	Average
3		17655.000	40.13	8.01	48.14	-40.06	88.20	300	65	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-02
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-20MHz_TX_5.9G Band_CH 177_ANT 6+7	Test Voltage	By Notebook PC

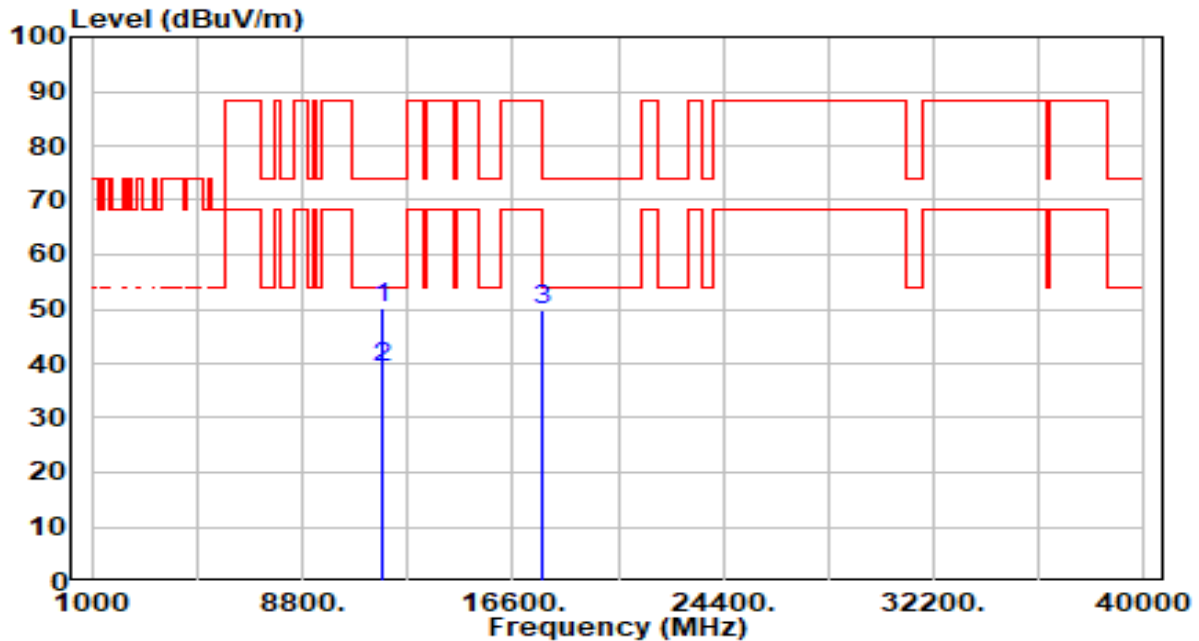


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11770.000	42.99	7.22	50.21	-23.79	74.00	300	210	Peak
2	*	11770.000	32.18	7.22	39.40	-14.60	54.00	300	210	Average
3		17655.000	41.66	8.01	49.67	-38.53	88.20	300	1	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-02
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-40MHz_TX_5.9G Band_CH 167_ANT 6+7	Test Voltage	By Notebook PC

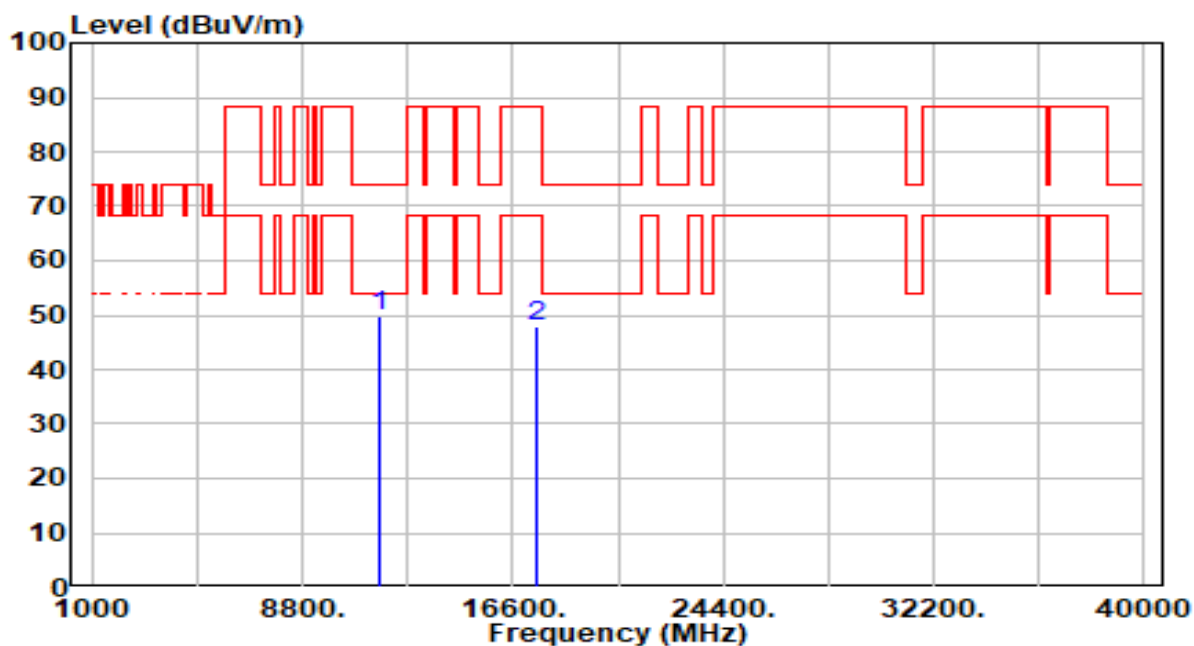


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11670.000	42.41	7.21	49.62	-24.38	74.00	300	188	Peak
2		17505.000	40.44	7.53	47.97	-40.23	88.20	300	165	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-02
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-40MHz_TX_5.9G Band_CH 167_ANT 6+7	Test Voltage	By Notebook PC

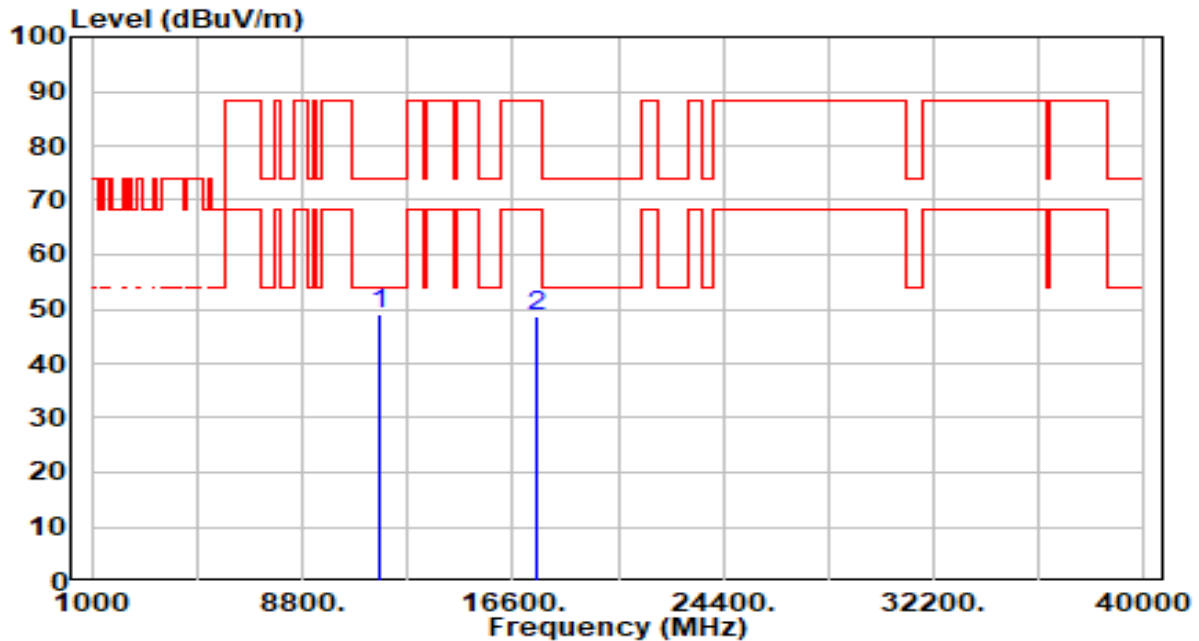


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11670.000	41.77	7.21	48.99	-25.01	74.00	300	319	Peak
2		17505.000	41.01	7.53	48.54	-39.66	88.20	300	29	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-02
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-40MHz_TX_5.9G Band_CH 175_ANT 6+7	Test Voltage	By Notebook PC

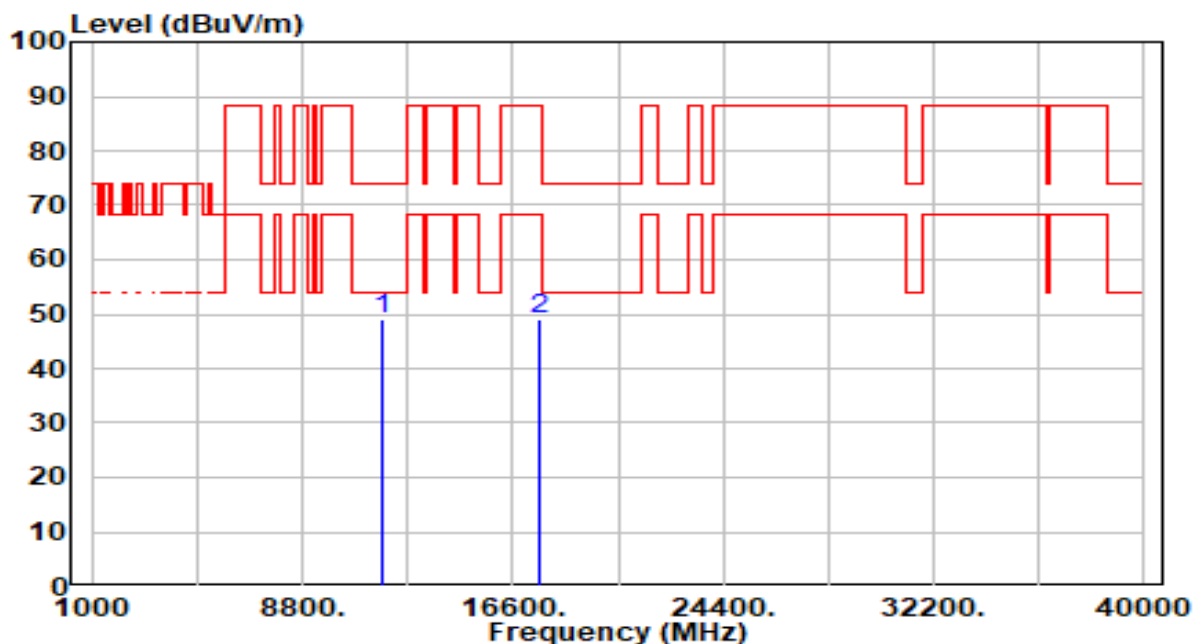


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11750.000	41.67	7.21	48.88	-25.12	74.00	300	183	Peak
2		17625.000	40.98	7.98	48.96	-39.24	88.20	300	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-02
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-40MHz_TX_5.9G Band_CH 175_ANT 6+7	Test Voltage	By Notebook PC

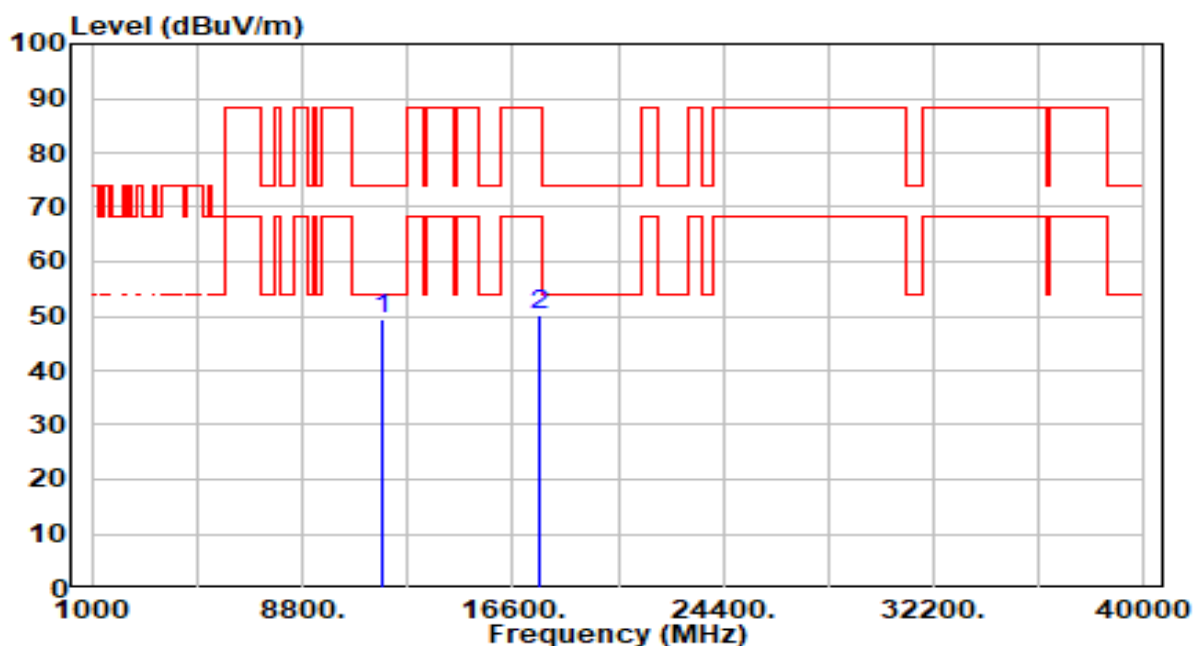


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11750.000	42.09	7.21	49.30	-24.70	74.00	300	226	Peak
2		17625.000	42.10	7.98	50.08	-38.12	88.20	300	261	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-02
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-80MHz_TX_5.9G Band_CH 171_ANT 6+7	Test Voltage	By Notebook PC

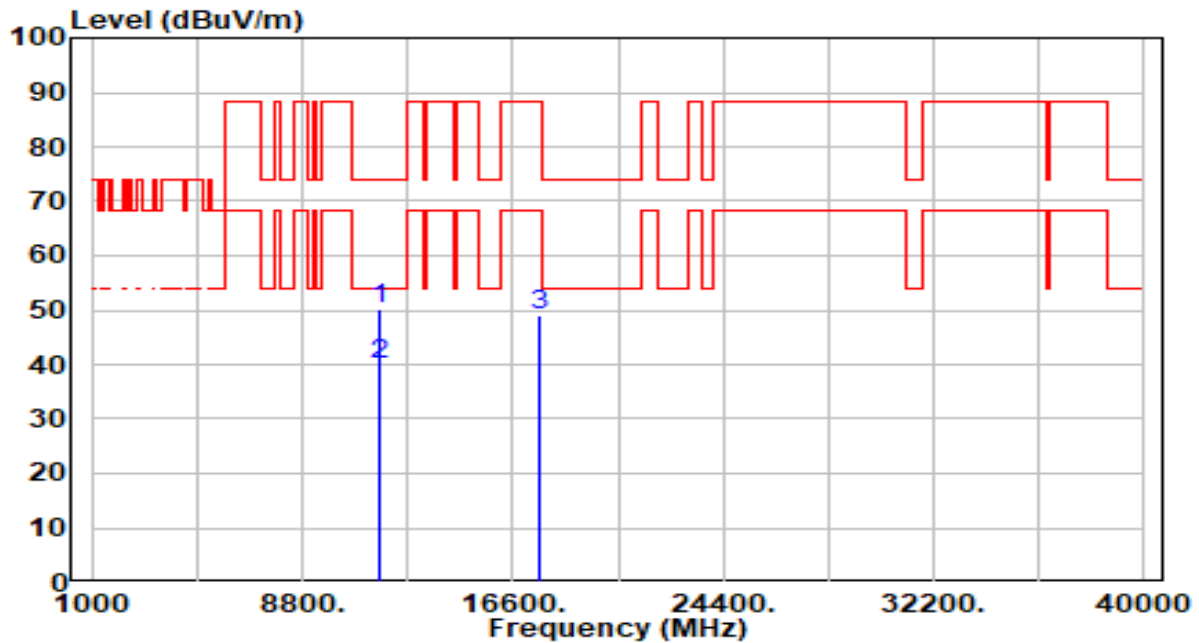


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11710.000	42.95	7.21	50.15	-23.85	74.00	300	128	Peak
2	*	11710.000	32.71	7.21	39.92	-14.08	54.00	300	128	Average
3		17565.000	41.10	7.80	48.90	-39.30	88.20	300	133	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-02
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-80MHz_TX_5.9G Band_CH 171_ANT 6+7	Test Voltage	By Notebook PC

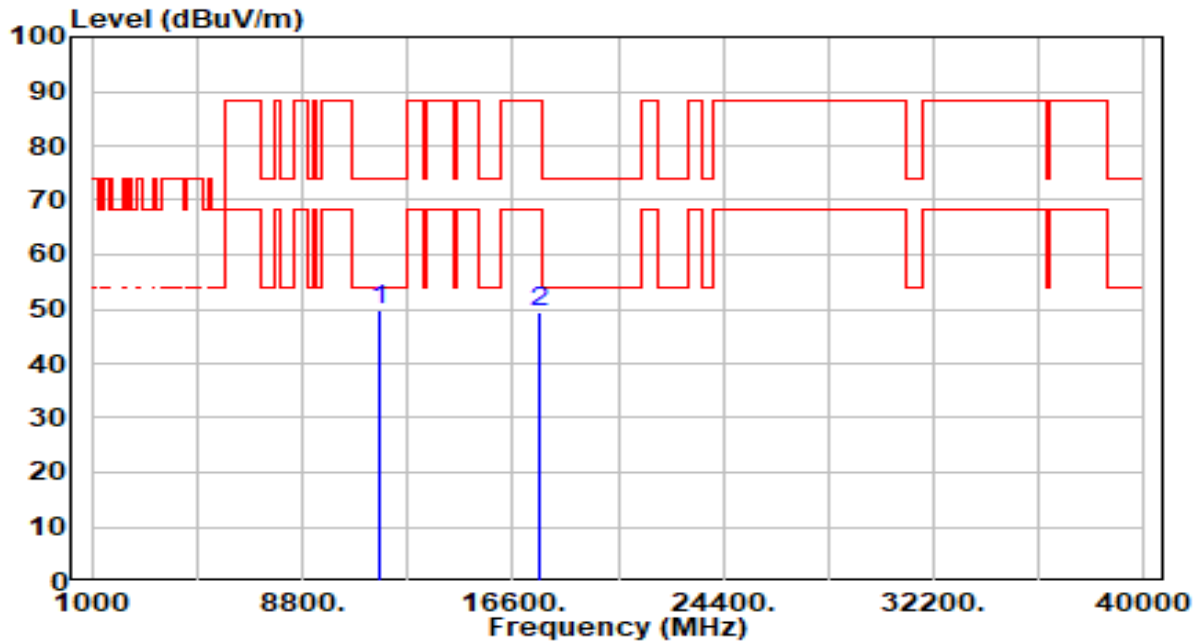


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11710.000	42.46	7.21	49.67	-24.33	74.00	300	354	Peak
2		17565.000	41.57	7.80	49.36	-38.84	88.20	300	352	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-02
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-160MHz_TX_5.9G Band_CH 163_ANT 6+7	Test Voltage	By Notebook PC

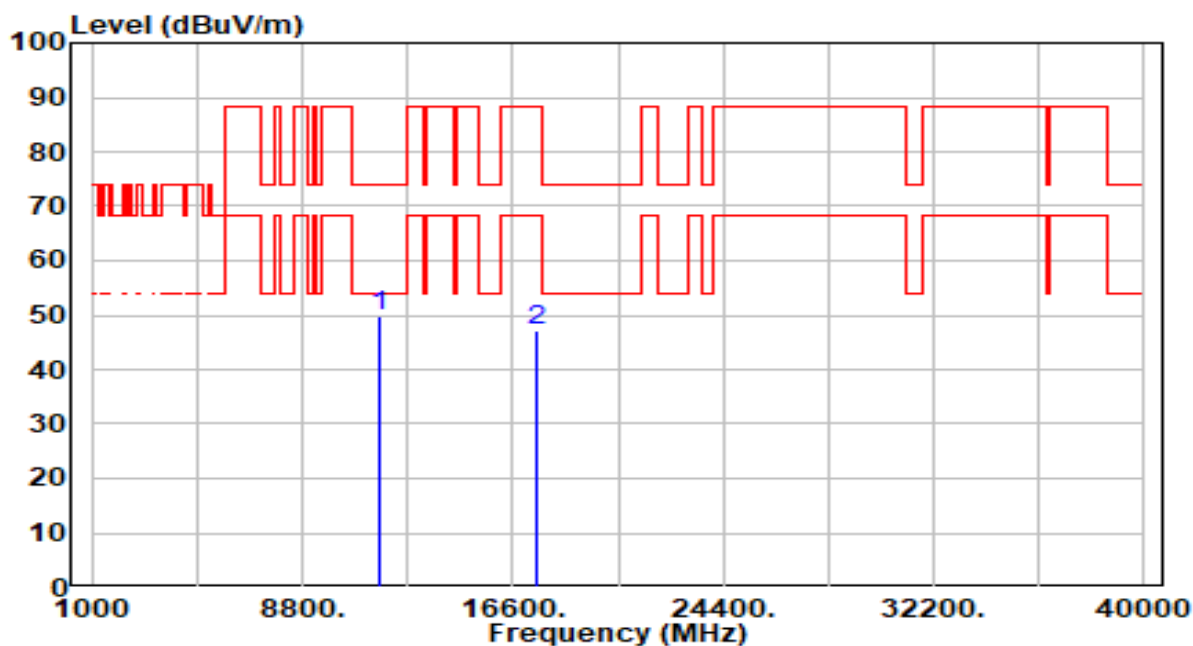


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11630.000	42.58	7.22	49.80	-24.20	74.00	300	118	Peak
2		17445.000	39.82	7.30	47.12	-41.08	88.20	300	86	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-02
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-160MHz_TX_5.9G Band_CH 163_ANT 6+7	Test Voltage	By Notebook PC

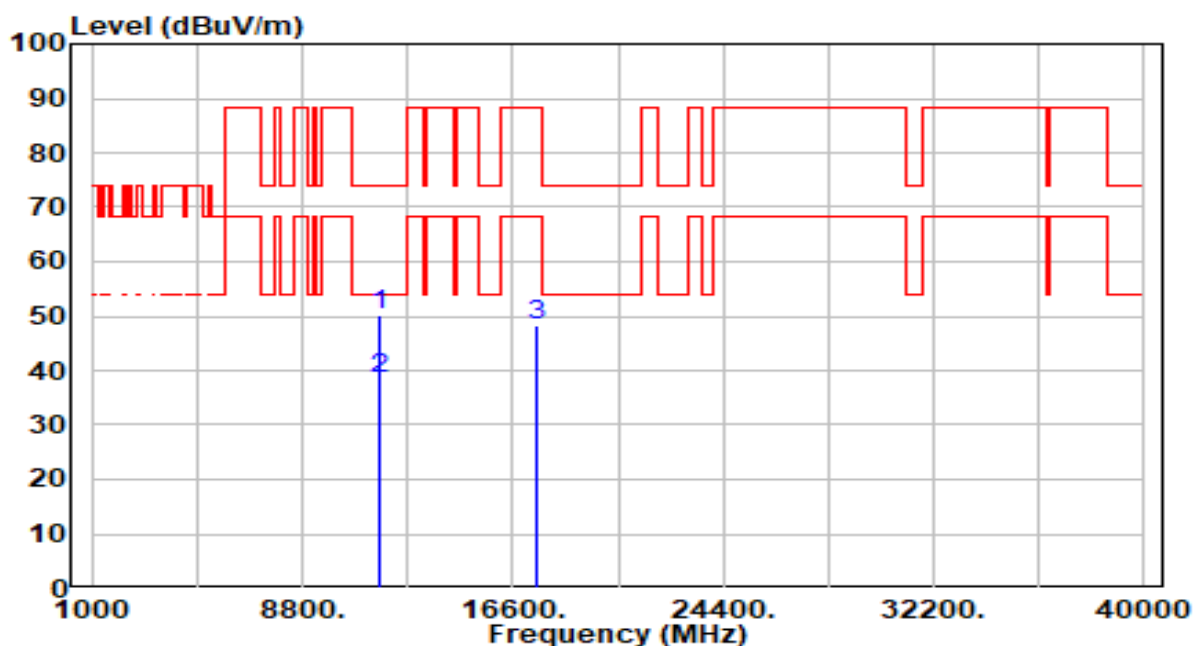


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11630.000	42.83	7.22	50.06	-23.94	74.00	300	360	Peak
2	*	11630.000	31.28	7.22	38.50	-15.50	54.00	300	360	Average
3		17445.000	40.91	7.30	48.21	-39.99	88.20	300	151	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-02
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_5.9G Band_CH 169_ANT 6+7	Test Voltage	By Notebook PC

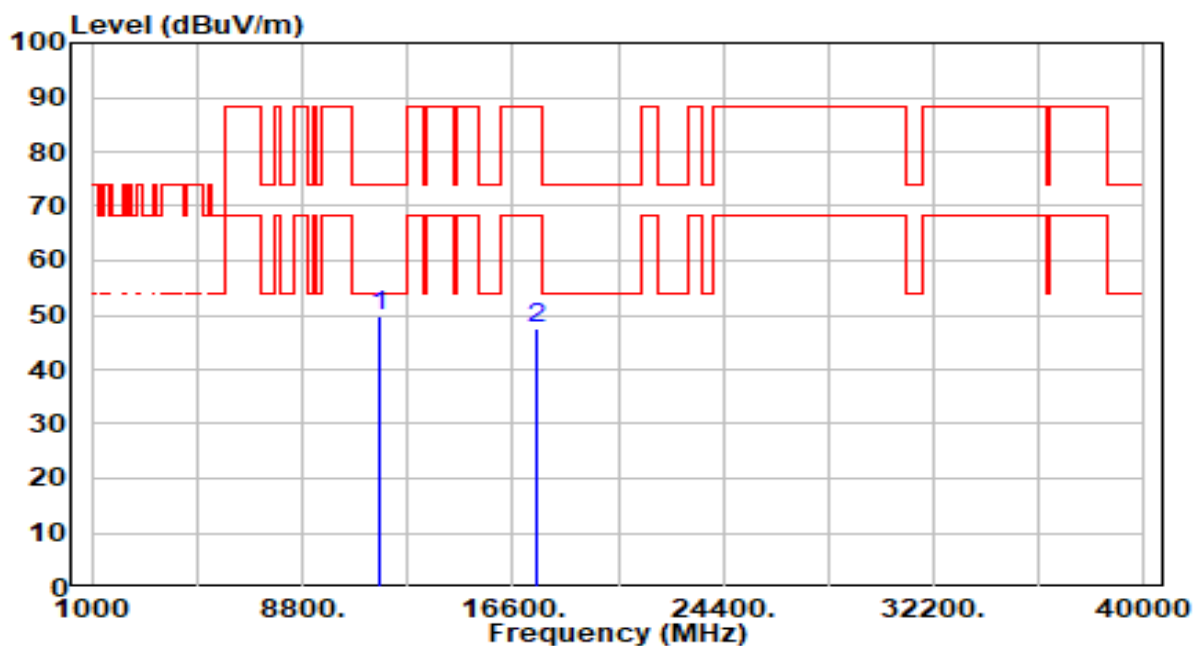


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11690.000	42.75	7.21	49.96	-24.04	74.00	300	165	Peak
2		17535.000	39.90	7.66	47.56	-40.64	88.20	300	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-02
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_5.9G Band_CH 169_ANT 6+7	Test Voltage	By Notebook PC

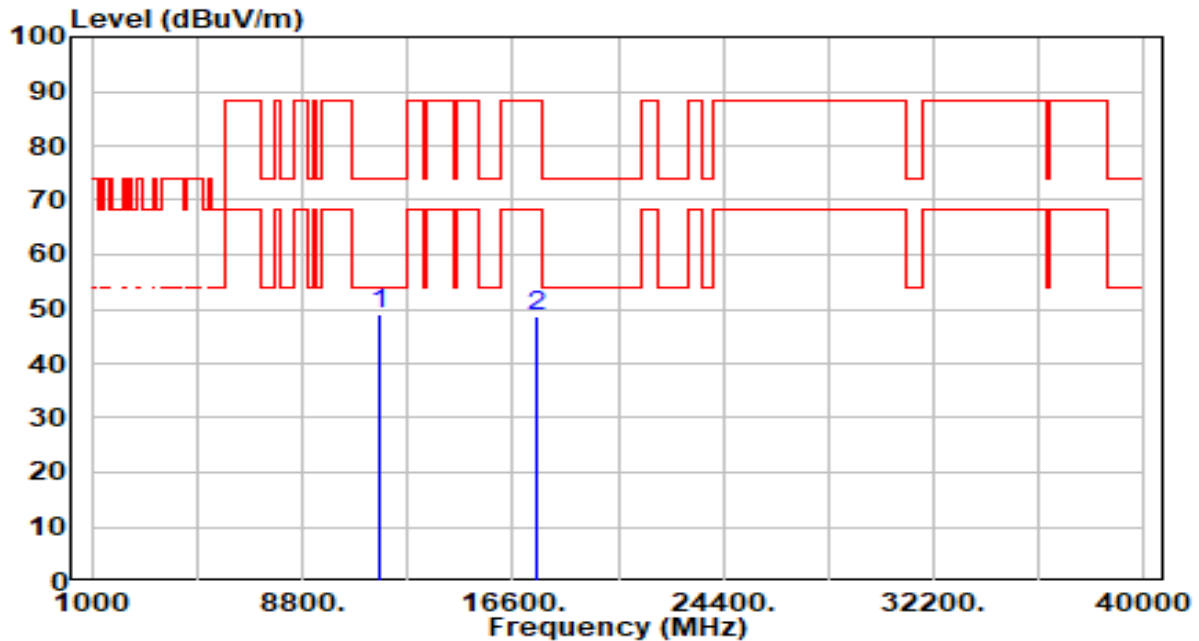


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11690.000	41.89	7.21	49.10	-24.90	74.00	300	95	Peak
2		17535.000	40.98	7.66	48.65	-39.55	88.20	300	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-02
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_5.9G Band_CH 173_ANT 6+7	Test Voltage	By Notebook PC

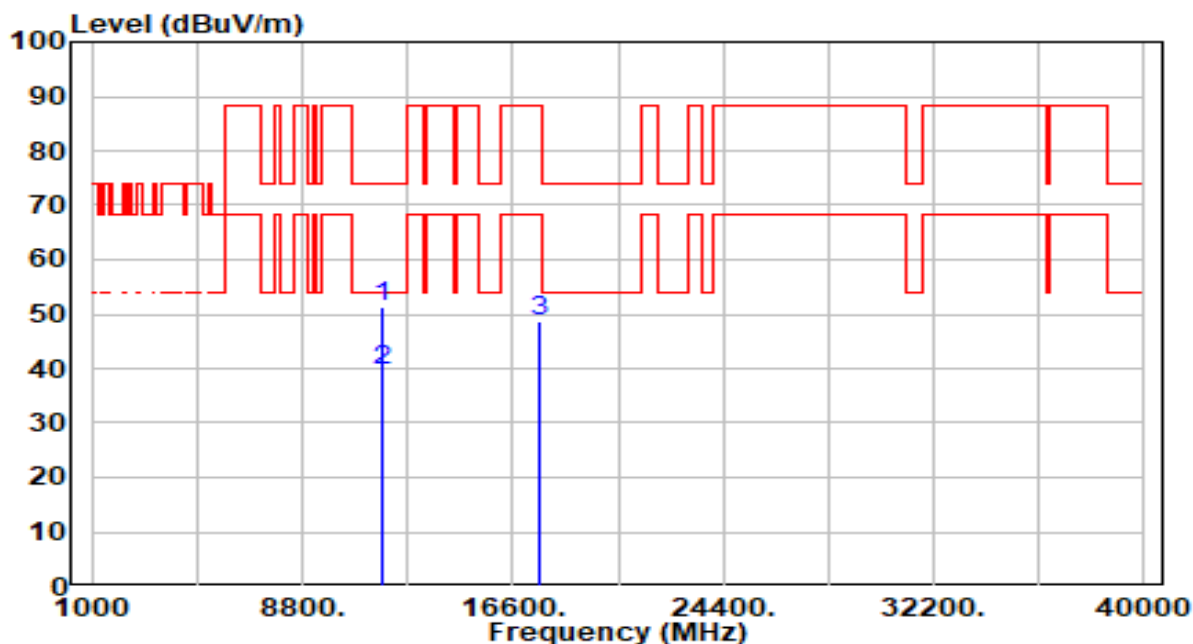


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11730.000	44.01	7.21	51.22	-22.78	74.00	300	190	Peak
2	*	11730.000	32.27	7.21	39.48	-14.52	54.00	300	190	Average
3		17595.000	40.89	7.93	48.82	-39.38	88.20	300	187	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-02
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_5.9G Band_CH 173_ANT 6+7	Test Voltage	By Notebook PC

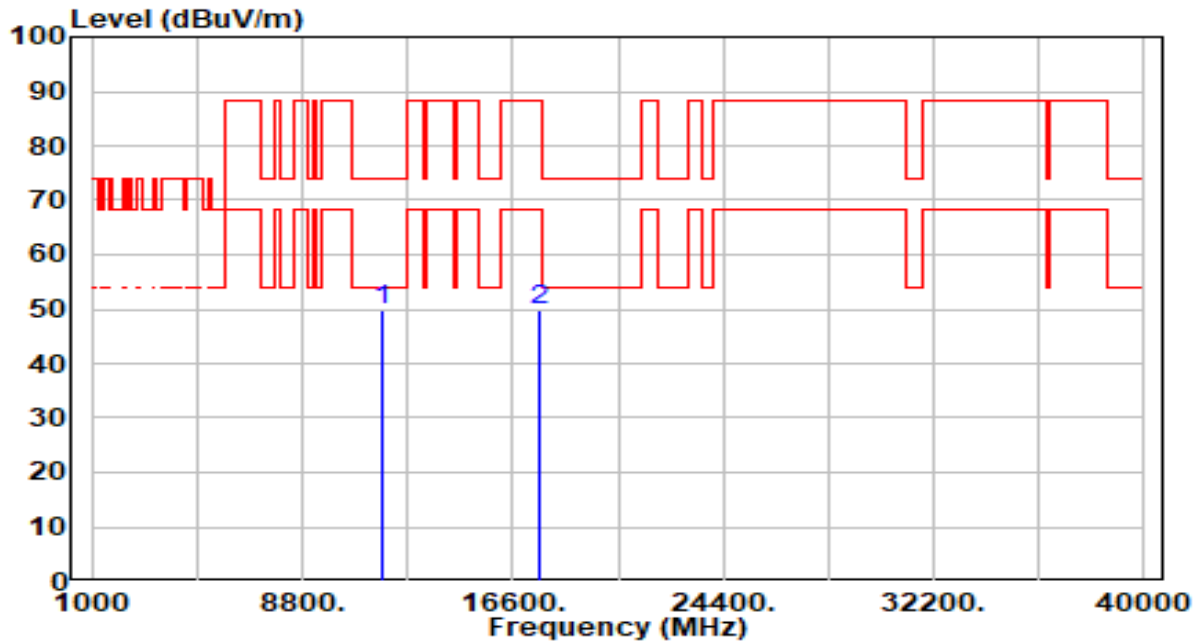


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11730.000	42.51	7.21	49.72	-24.28	74.00	300	360	Peak
2		17595.000	41.92	7.93	49.85	-38.35	88.20	300	269	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-02
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_5.9G Band_CH 177_ANT 6+7	Test Voltage	By Notebook PC

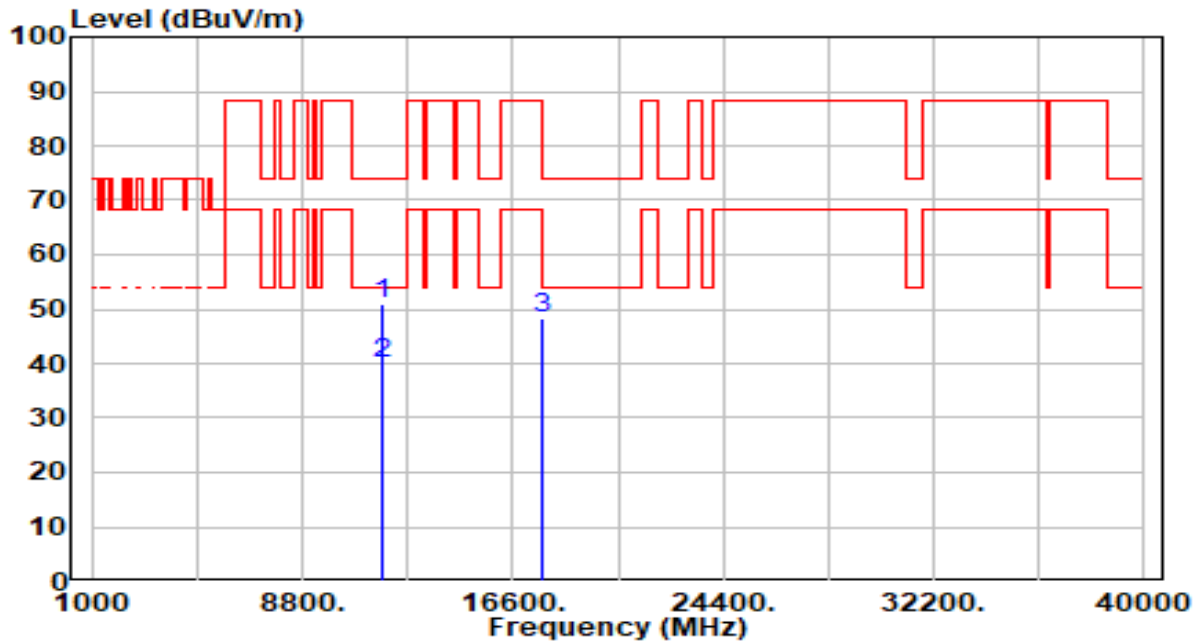


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11770.000	43.87	7.22	51.08	-22.92	74.00	300	169	Peak
2	*	11770.000	32.61	7.22	39.83	-14.17	54.00	300	169	Average
3		17655.000	40.37	8.01	48.38	-39.82	88.20	300	61	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-02
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_5.9G Band_CH 177_ANT 6+7	Test Voltage	By Notebook PC

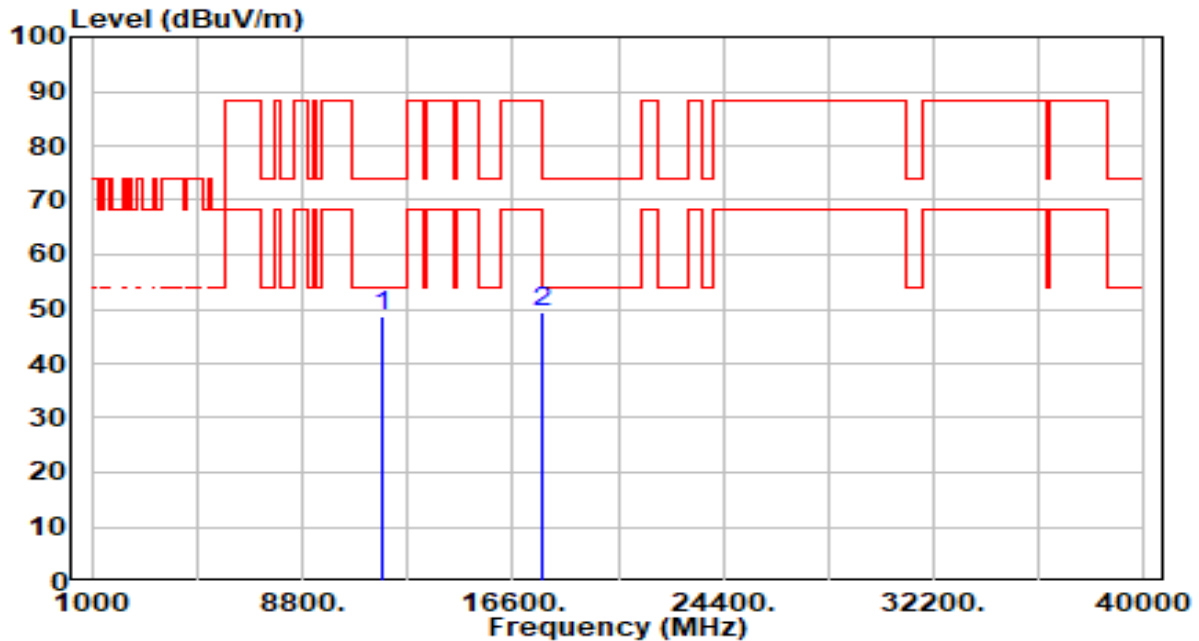


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11770.000	41.53	7.22	48.74	-25.26	74.00	300	0	Peak
2		17655.000	41.50	8.01	49.51	-38.69	88.20	300	288	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-02
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-40MHz_TX_5.9G Band_CH 167_ANT 6+7	Test Voltage	By Notebook PC

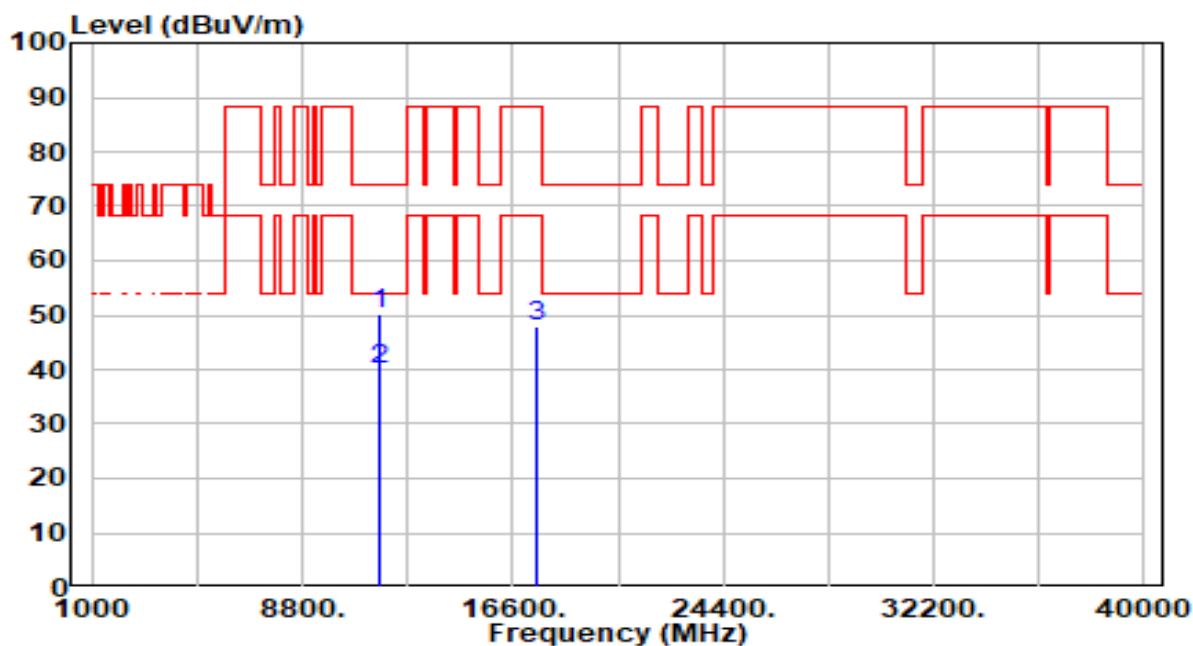


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11670.000	43.02	7.21	50.24	-23.76	74.00	300	177	Peak
2	*	11670.000	32.71	7.21	39.92	-14.08	54.00	300	177	Average
3		17505.000	40.42	7.53	47.95	-40.25	88.20	300	46	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-02
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-40MHz_TX_5.9G Band_CH 167_ANT 6+7	Test Voltage	By Notebook PC

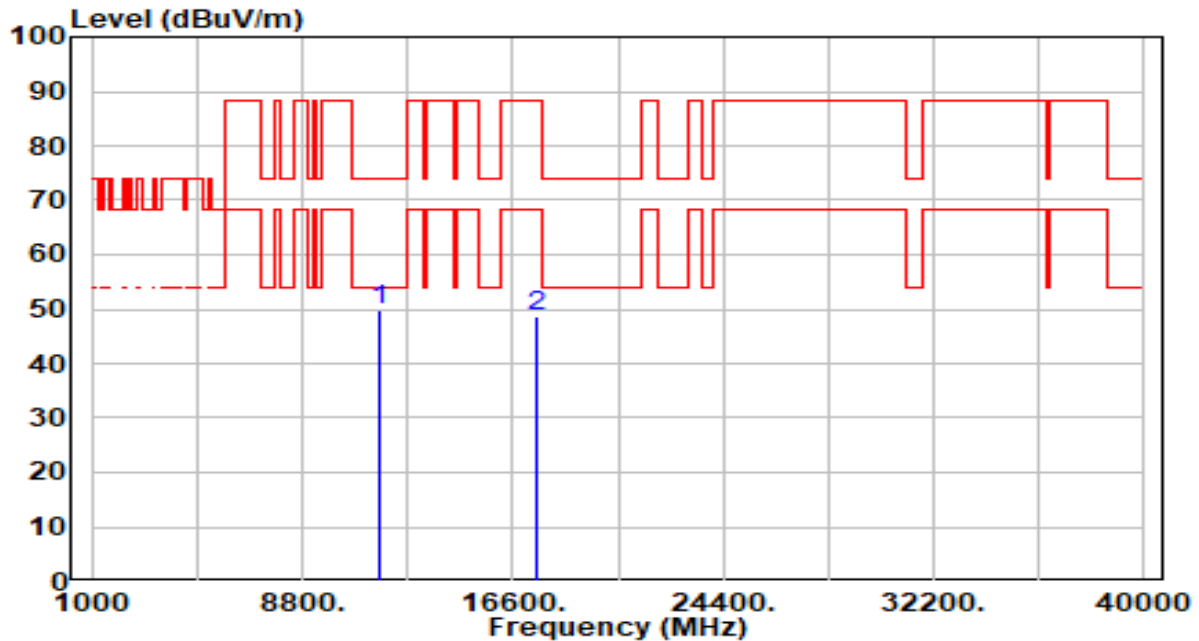


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11670.000	42.56	7.21	49.77	-24.23	74.00	300	220	Peak
2		17505.000	41.01	7.53	48.54	-39.66	88.20	300	43	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-02
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-40MHz_TX_5.9G Band_CH 175_ANT 6+7	Test Voltage	By Notebook PC

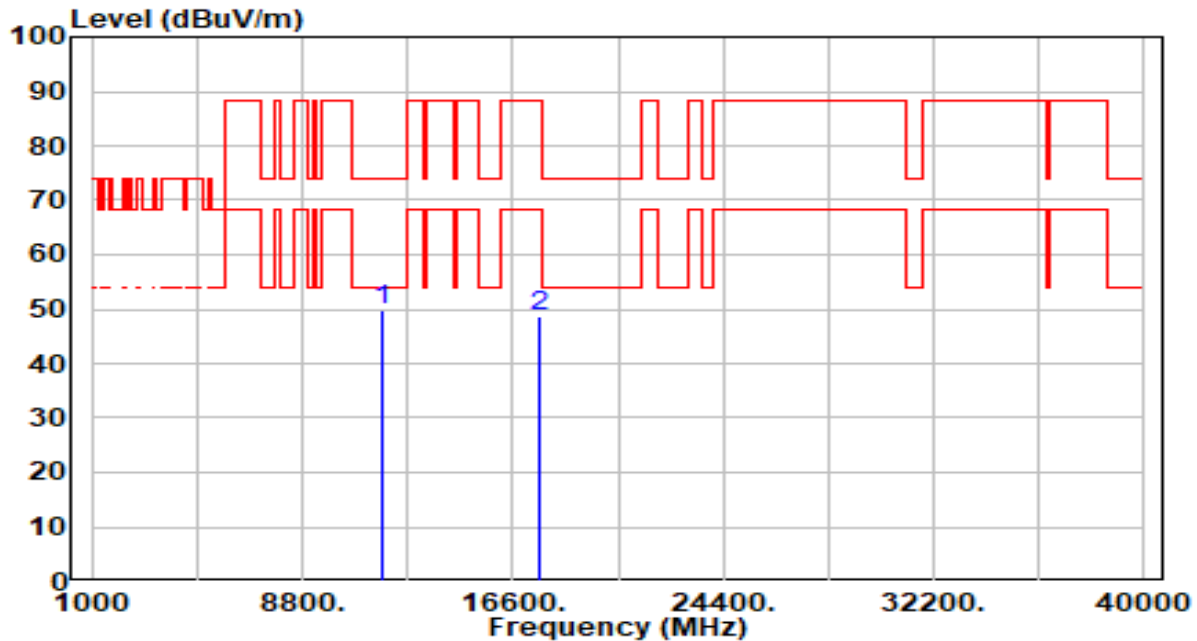


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11750.000	42.51	7.21	49.73	-24.27	74.00	300	133	Peak
2		17625.000	40.66	7.98	48.64	-39.56	88.20	300	293	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-02
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-40MHz_TX_5.9G Band_CH 175_ANT 6+7	Test Voltage	By Notebook PC

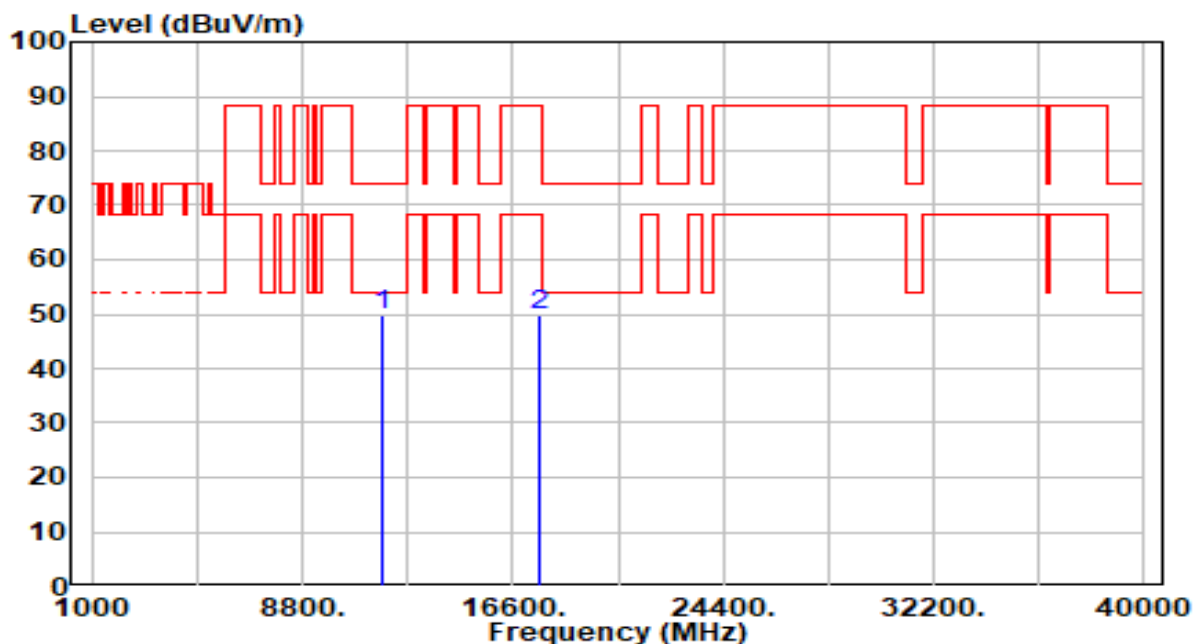


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11750.000	42.54	7.21	49.75	-24.25	74.00	300	31	Peak
2		17625.000	41.92	7.98	49.90	-38.30	88.20	300	253	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-02
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-80MHz_TX_5.9G Band_CH 171_ANT 6+7	Test Voltage	By Notebook PC

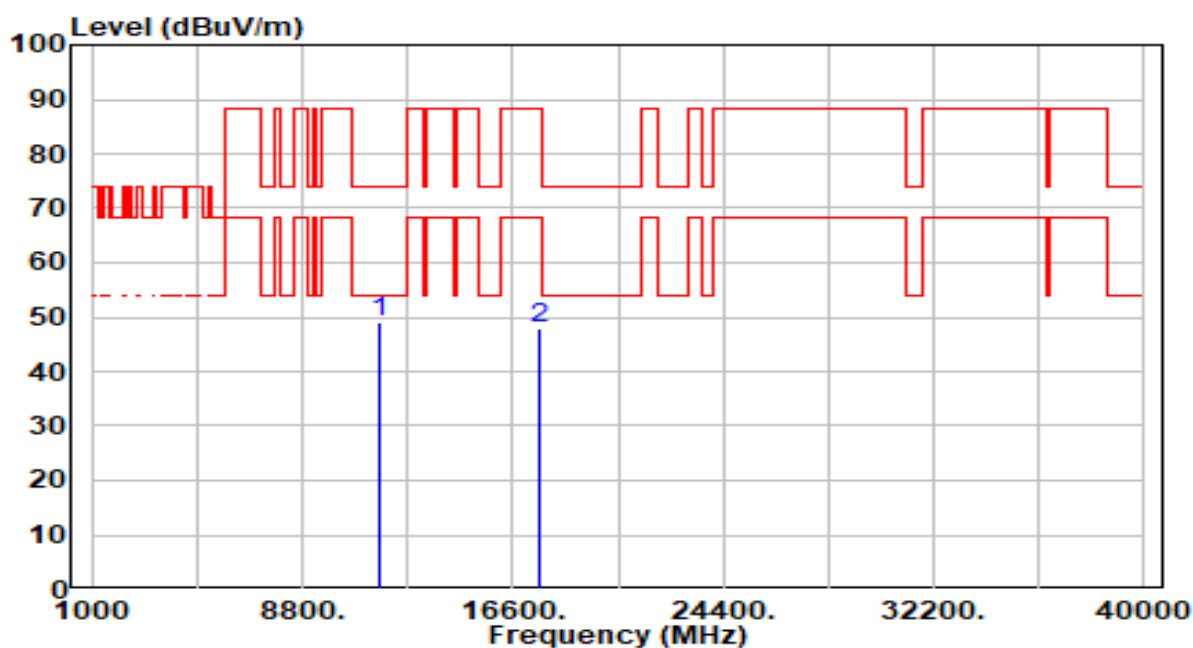


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11710.000	41.83	7.21	49.03	-24.97	74.00	300	183	Peak
2		17565.000	39.96	7.80	47.75	-40.45	88.20	300	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-02
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-80MHz_TX_5.9G Band_CH 171_ANT 6+7	Test Voltage	By Notebook PC

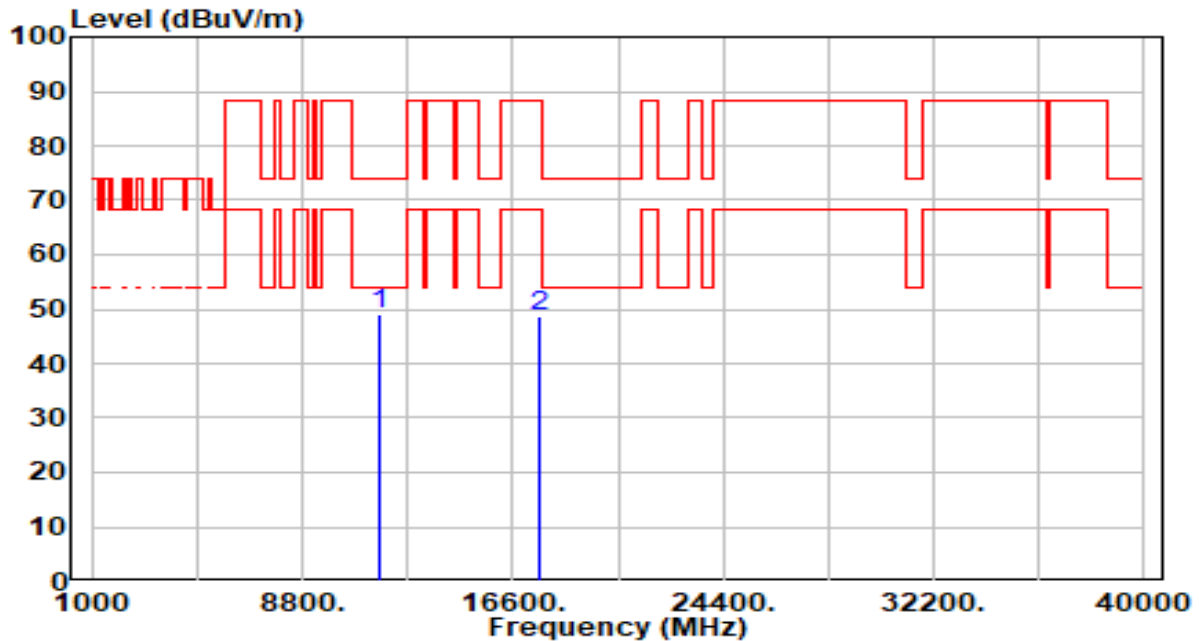


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11710.000	42.00	7.21	49.20	-24.80	74.00	300	85	Peak
2		17565.000	40.88	7.80	48.68	-39.52	88.20	300	176	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-02
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_TX_5.9G Band_CH 163_ANT 6+7	Test Voltage	By Notebook PC

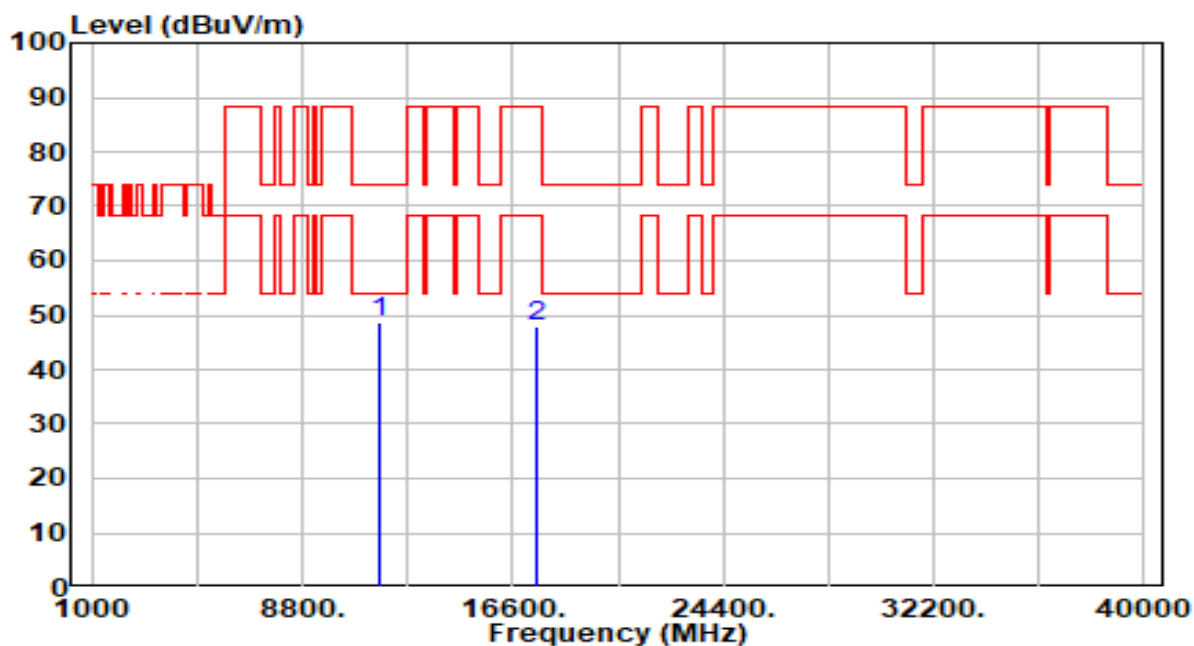


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11630.000	41.35	7.22	48.58	-25.42	74.00	300	253	Peak
2		17445.000	40.54	7.30	47.84	-40.36	88.20	300	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-02
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_TX_5.9G Band_CH 163_ANT 6+7	Test Voltage	By Notebook PC

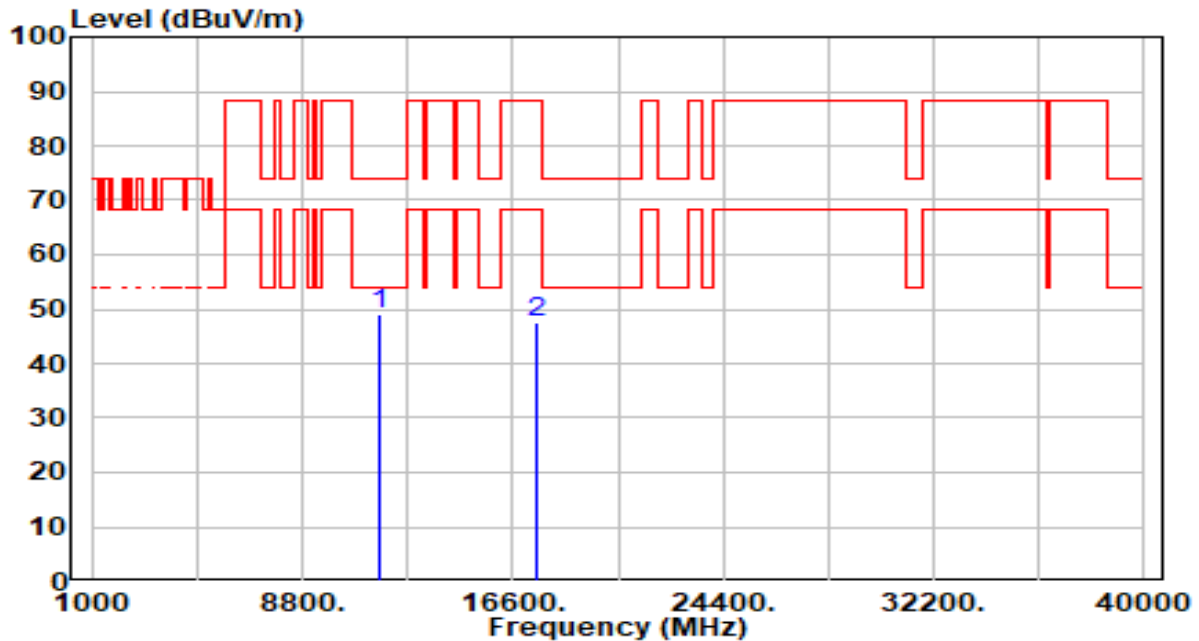


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11630.000	41.75	7.22	48.97	-25.03	74.00	300	0	Peak
2		17445.000	40.27	7.30	47.57	-40.63	88.20	300	100	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-18
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_5.9G Band_26Tone_RU8_CH 173_ANT 6+7	Test Voltage	By Notebook PC

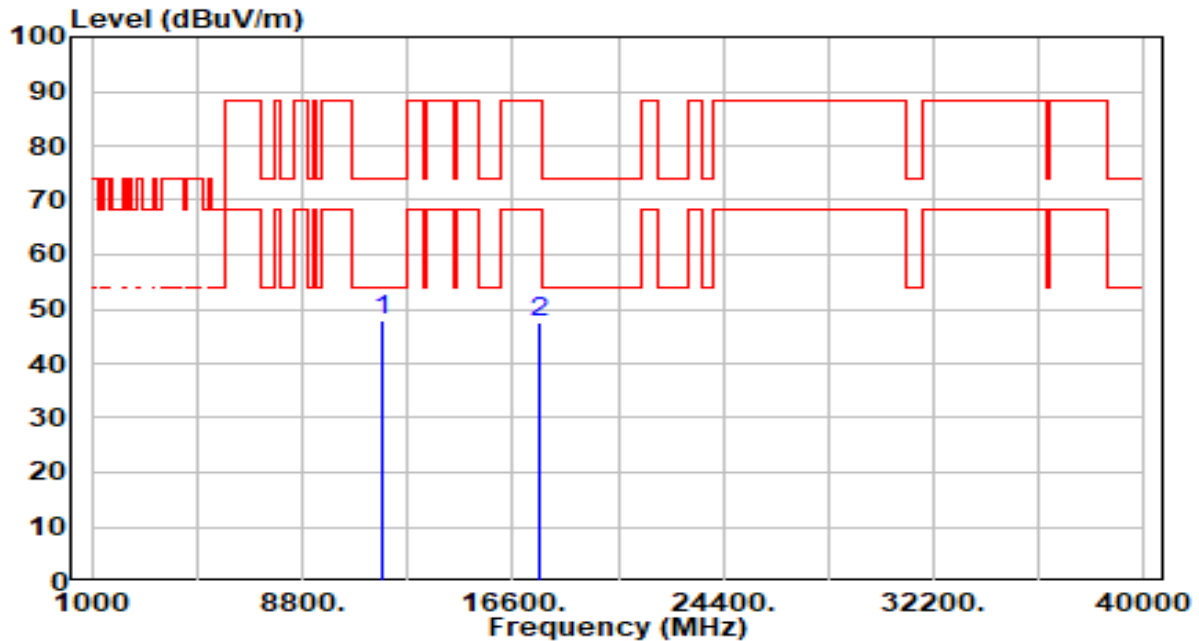


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11730.000	40.53	7.21	47.74	-26.26	74.00	100	148	Peak
2		17595.000	39.57	7.93	47.50	-40.70	88.20	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-18
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_5.9G Band_26Tone_RU8_CH 173_ANT 6+7	Test Voltage	By Notebook PC

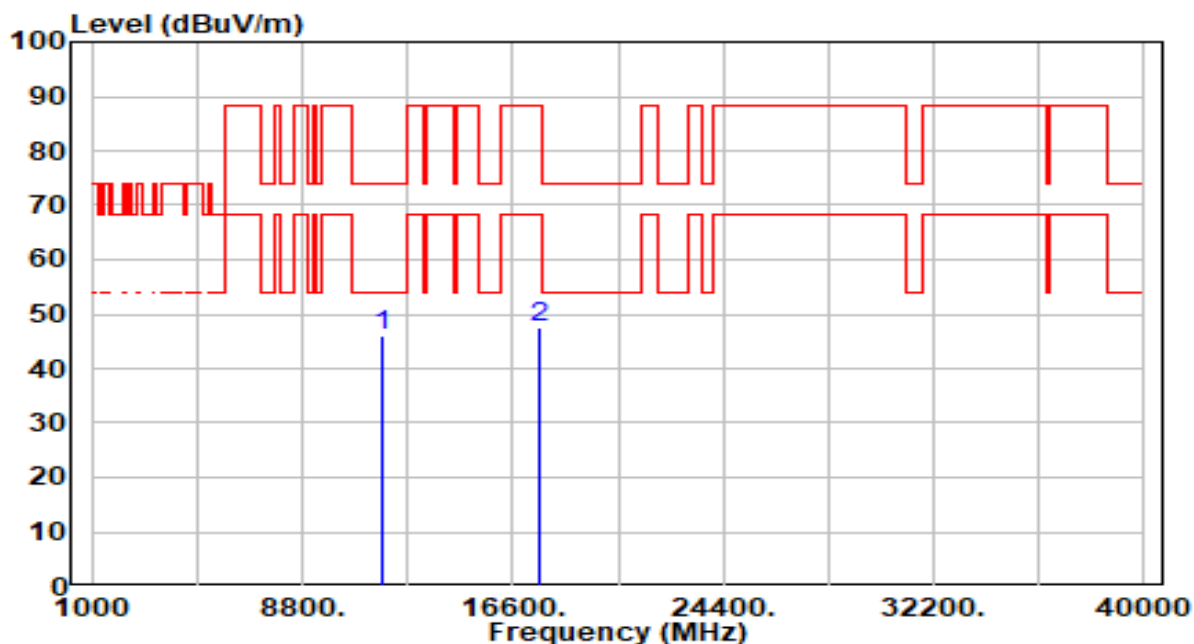


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11730.000	38.97	7.21	46.18	-27.82	74.00	100	0	Peak
2		17595.000	39.47	7.93	47.40	-40.80	88.20	100	260	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-18
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_5.9G Band_52Tone_RU77_CH 173_ANT 6+7	Test Voltage	By Notebook PC

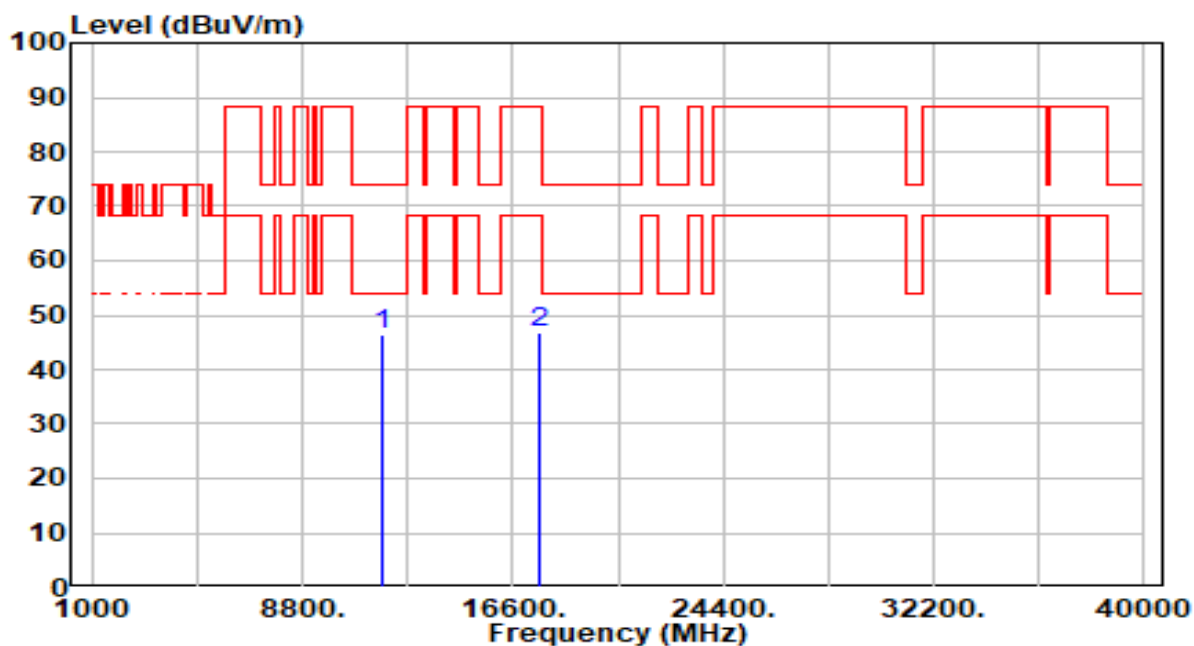


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11730.000	39.23	7.21	46.44	-27.56	74.00	100	101	Peak
2		17595.000	39.04	7.93	46.97	-41.23	88.20	100	1	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-18
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_5.9G Band_52Tone_RU77_CH 173_ANT 6+7	Test Voltage	By Notebook PC

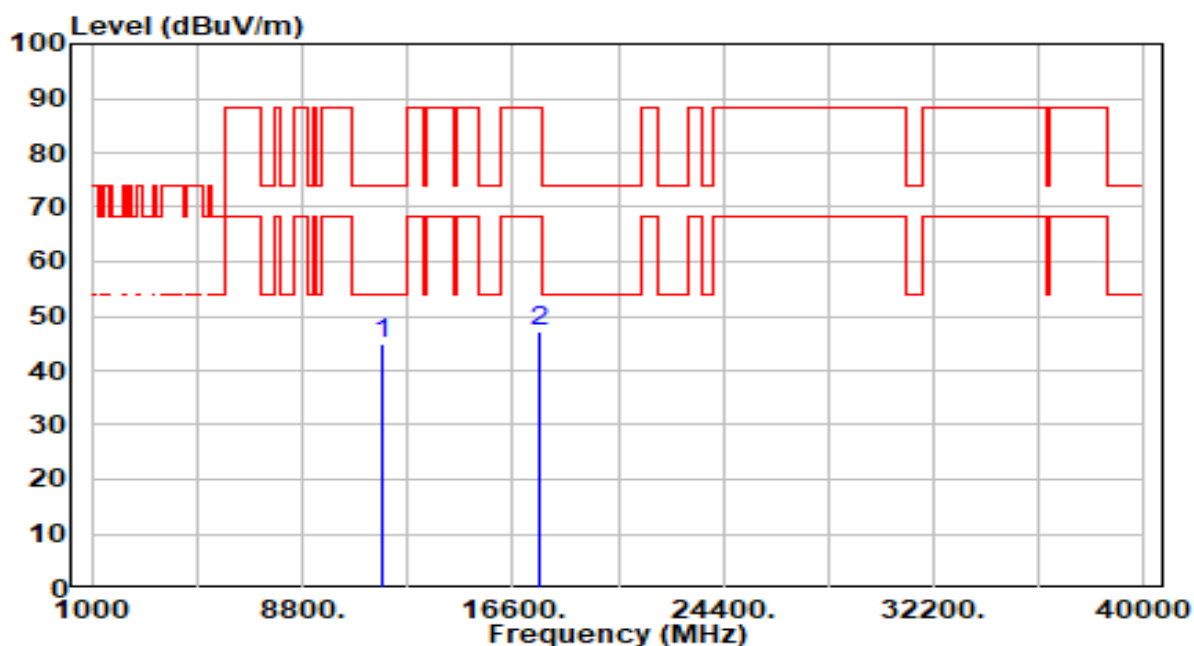


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11730.000	37.86	7.21	45.07	-28.93	74.00	100	123	Peak
2		17595.000	39.19	7.93	47.12	-41.08	88.20	100	190	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-18
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_5.9G Band_106Tone_RU107_CH 173_ANT 6+7	Test Voltage	By Notebook PC

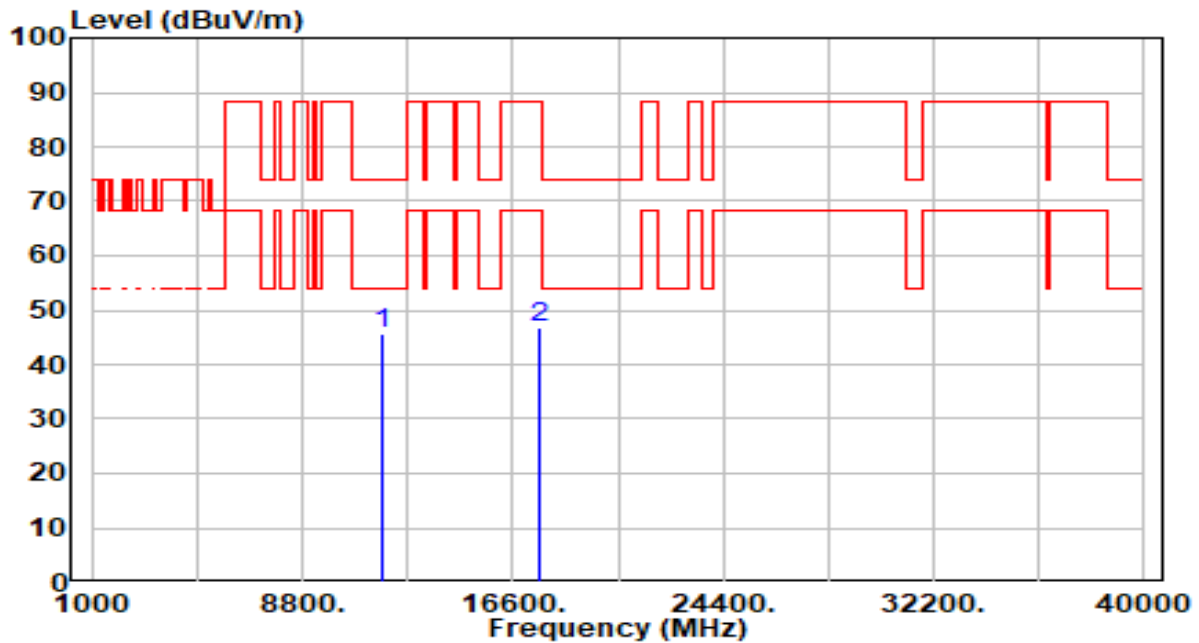


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11730.000	38.42	7.21	45.63	-28.37	74.00	100	33	Peak
2		17595.000	38.74	7.93	46.67	-41.53	88.20	100	229	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-18
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_5.9G Band_106Tone_RU107_CH 173_ANT 6+7	Test Voltage	By Notebook PC

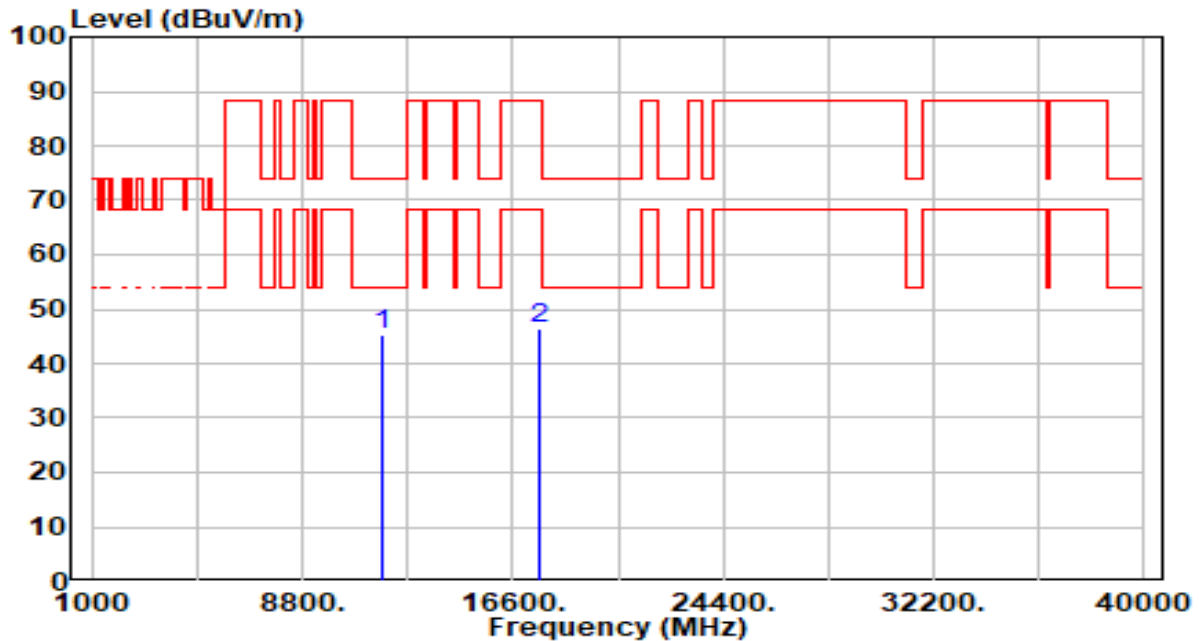


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11730.000	38.20	7.21	45.41	-28.59	74.00	100	35	Peak
2		17595.000	38.53	7.93	46.46	-41.74	88.20	100	95	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-18
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_5.9G Band_242Tone_RU122_CH 173_ANT 6+7	Test Voltage	By Notebook PC

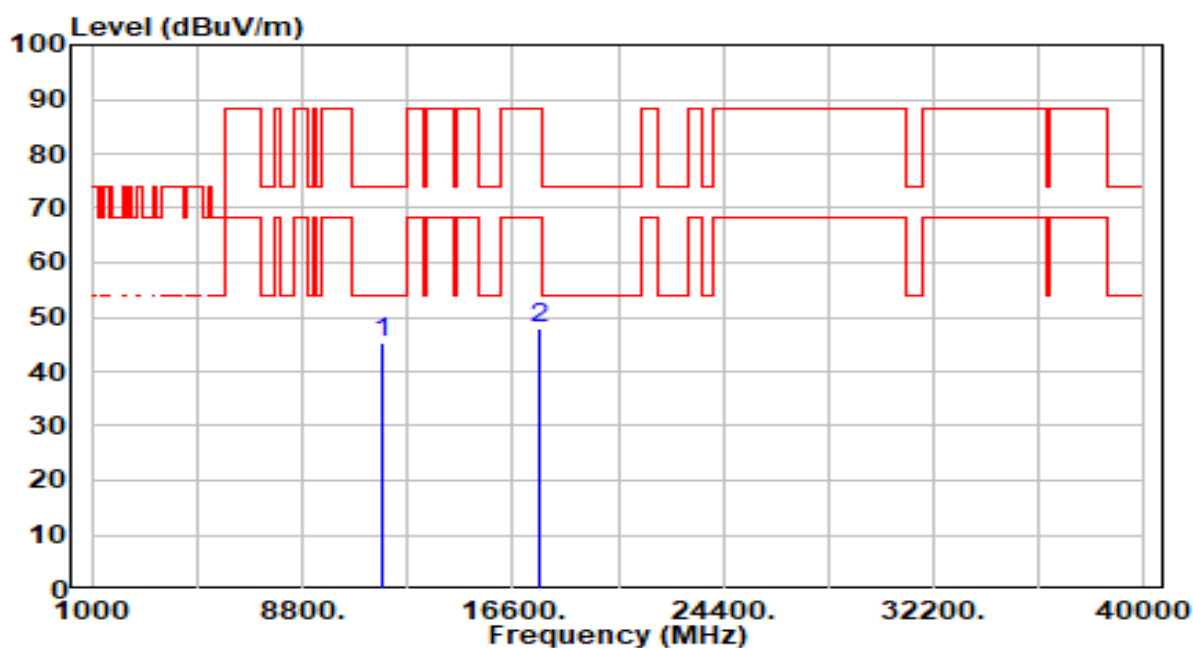


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11730.000	38.13	7.21	45.34	-28.66	74.00	100	360	Peak
2		17595.000	39.94	7.93	47.87	-40.33	88.20	100	232	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-18
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_5.9G Band_242Tone_RU122_CH 173_ANT 6+7	Test Voltage	By Notebook PC

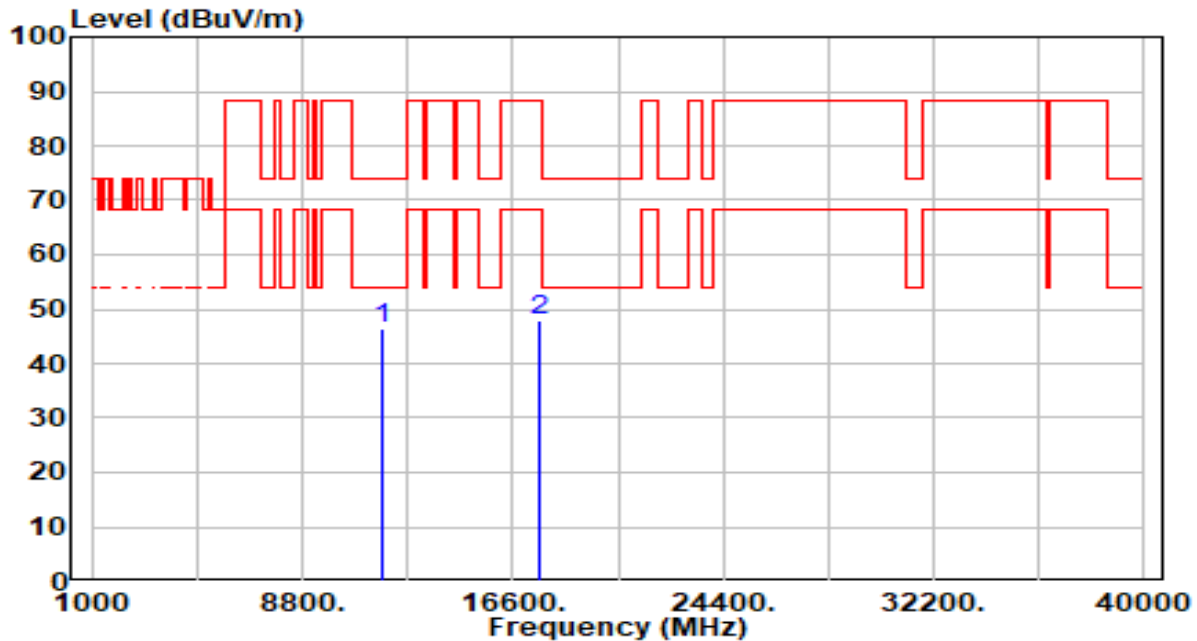


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11730.000	39.26	7.21	46.47	-27.53	74.00	100	0	Peak
2		17595.000	40.03	7.93	47.96	-40.24	88.20	100	76	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-20
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_5.9G Band_52+26Tone_MRU1_CH 173_ANT 6+7	Test Voltage	By Notebook PC

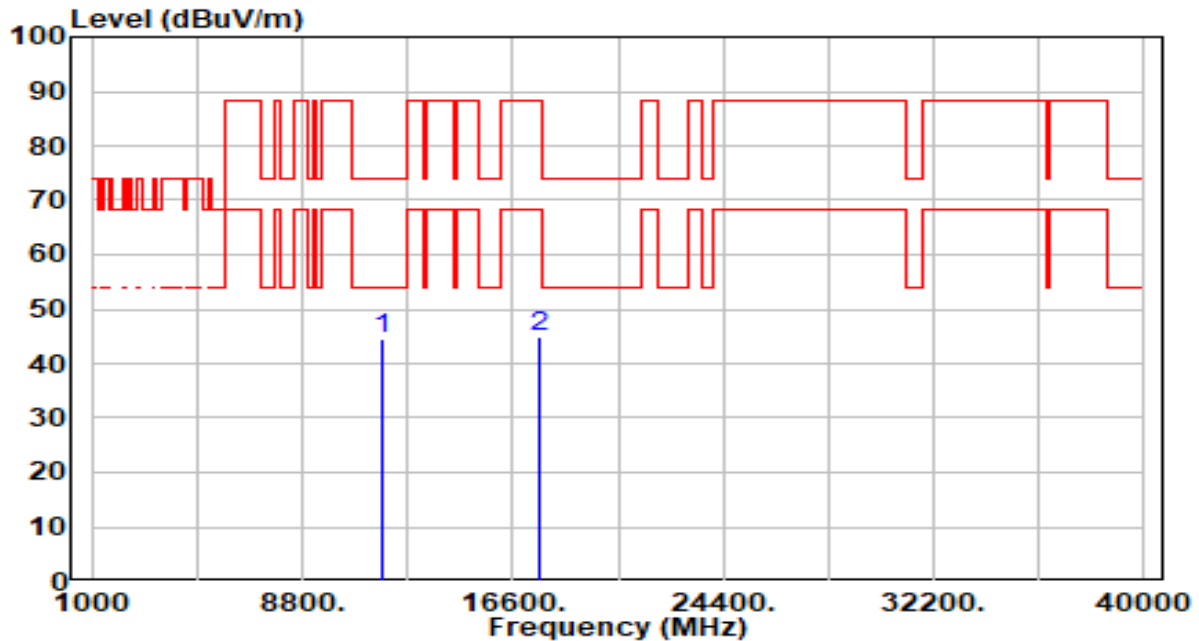


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11730.000	37.26	7.21	44.47	-29.53	74.00	100	326	Peak
2		17595.000	36.83	7.93	44.76	-43.44	88.20	100	146	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-20
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_5.9G Band_52+26Tone_MRU1_CH 173_ANT 6+7	Test Voltage	By Notebook PC

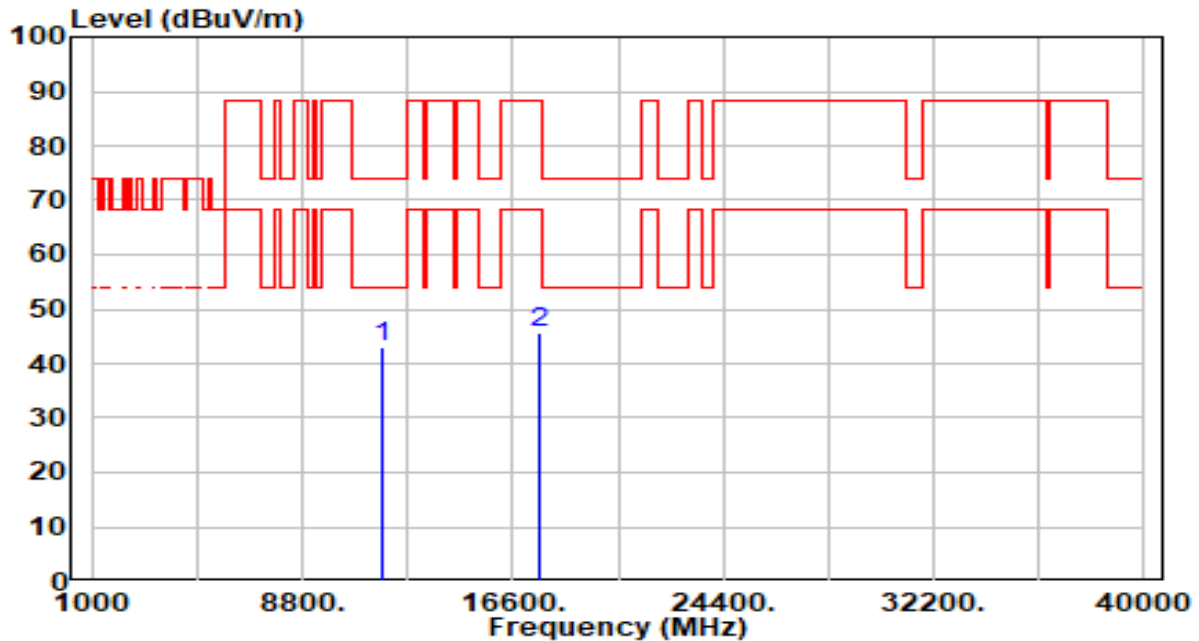


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11730.000	35.98	7.21	43.19	-30.81	74.00	100	253	Peak
2		17595.000	37.58	7.93	45.51	-42.69	88.20	100	186	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-20
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_5.9G Band_106+26Tone_MRU1_CH 173_ANT 6+7	Test Voltage	By Notebook PC

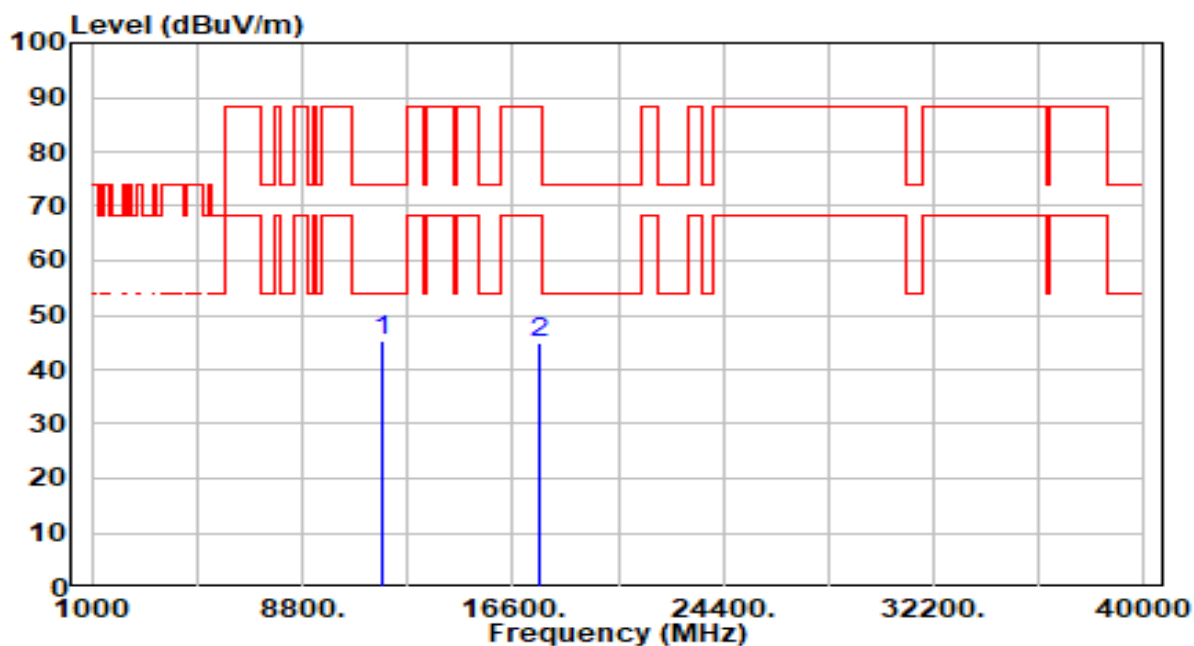


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11730.000	38.12	7.21	45.33	-28.67	74.00	100	360	Peak
2		17595.000	36.90	7.93	44.83	-43.37	88.20	100	17	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-20
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_5.9G Band_106+26Tone_MRU1_CH 173_ANT 6+7	Test Voltage	By Notebook PC

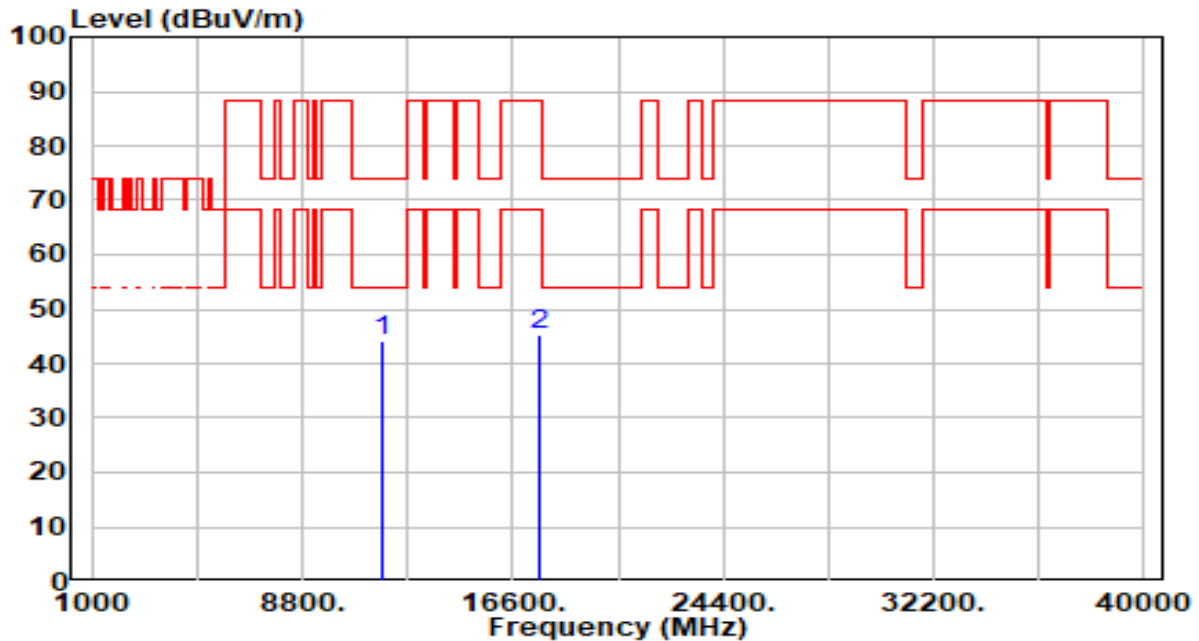


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11730.000	37.11	7.21	44.32	-29.68	74.00	100	215	Peak
2		17595.000	37.34	7.93	45.26	-42.94	88.20	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-20
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-80MHz_TX_5.9G Band_484+242Tone_MRU2_CH 171_ANT 6+7	Test Voltage	By Notebook PC

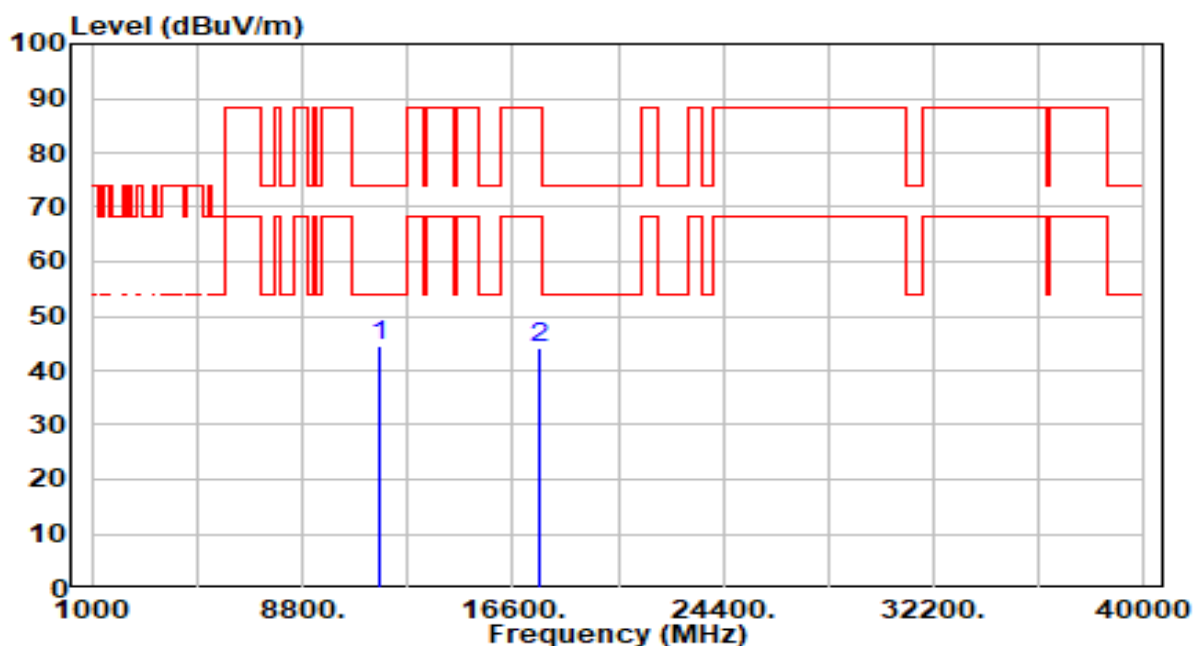


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11710.000	37.25	7.21	44.46	-29.54	74.00	100	0	Peak
2		17565.000	36.46	7.80	44.25	-43.95	88.20	100	87	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-20
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-80MHz_TX_5.9G Band_484+242Tone_MRU2_CH 171_ANT 6+7	Test Voltage	By Notebook PC

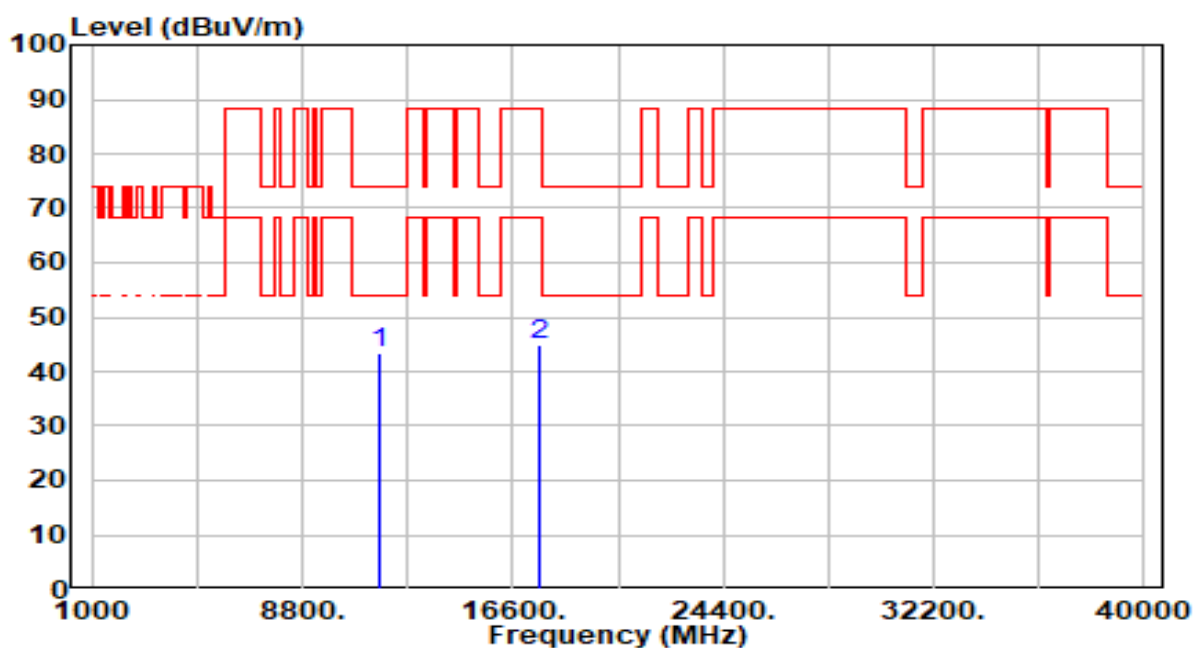


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11710.000	36.01	7.21	43.21	-30.79	74.00	100	321	Peak
2		17565.000	37.18	7.80	44.97	-43.23	88.20	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-20
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_TX_5.9G Band_996+484Tone_MRU2_CH 163_ANT 6+7	Test Voltage	By Notebook PC

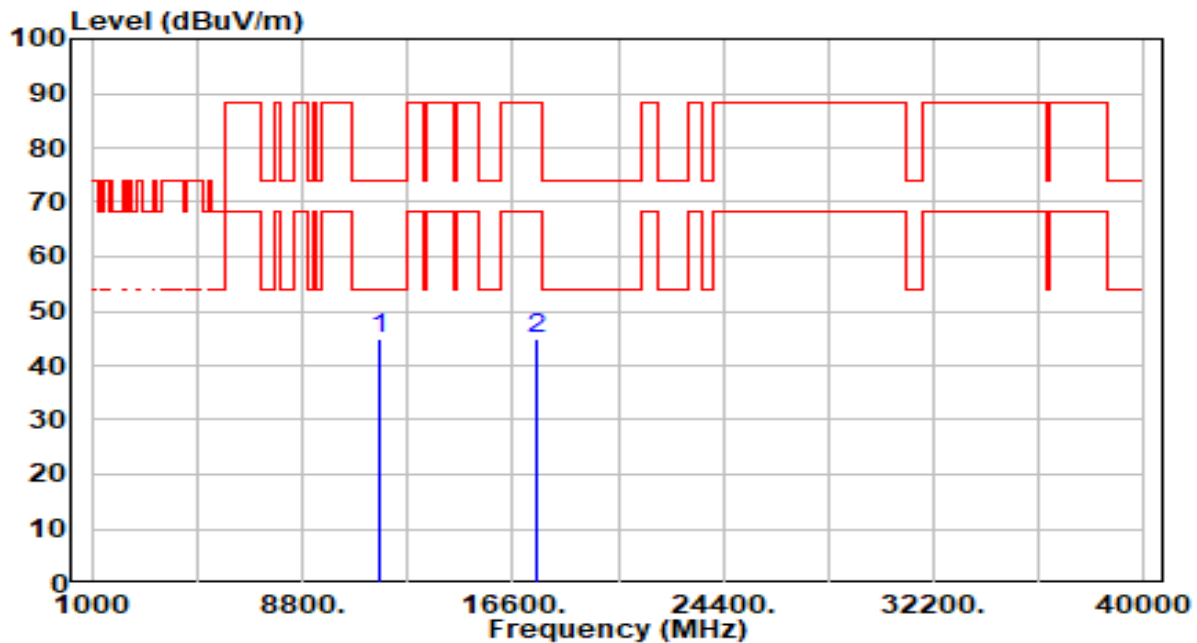


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11630.000	37.76	7.22	44.99	-29.01	74.00	100	360	Peak
2		17445.000	37.44	7.30	44.74	-43.46	88.20	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-20
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_TX_5.9G Band_996+484Tone_MRU2_CH 163_ANT 6+7	Test Voltage	By Notebook PC

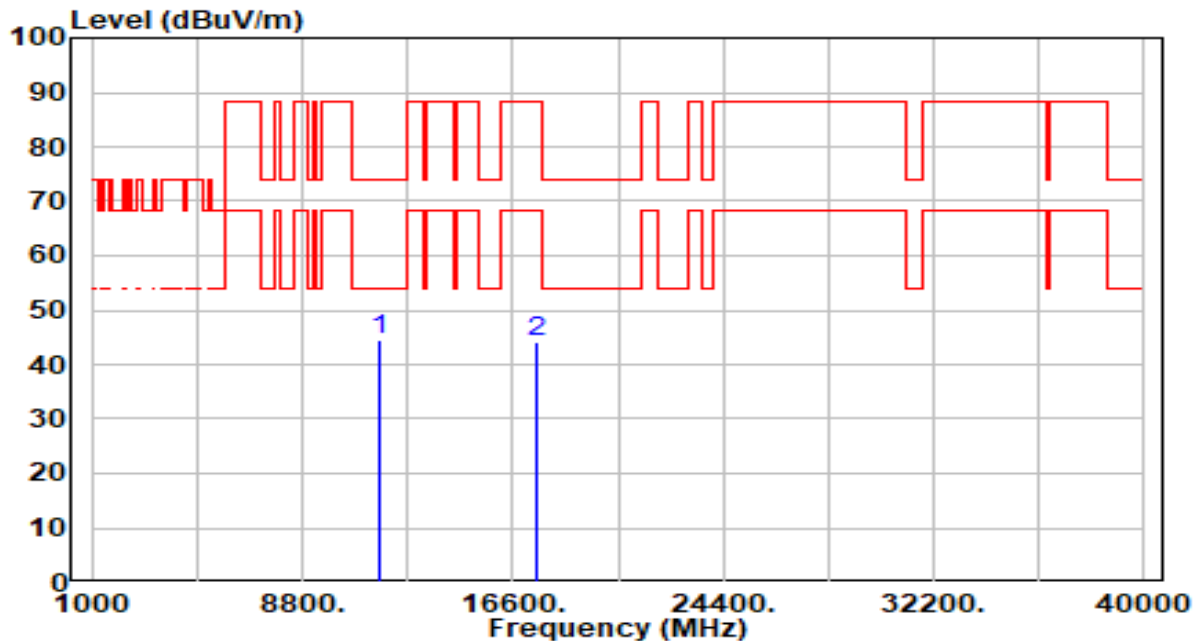


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11630.000	37.34	7.22	44.56	-29.44	74.00	100	200	Peak
2		17445.000	36.86	7.30	44.15	-44.05	88.20	100	67	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-20
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-80MHz_TX_5.9G Band_484+242Tone_PUN2_CH 171_ANT 6+7_Puncture Mode	Test Voltage	By Notebook PC

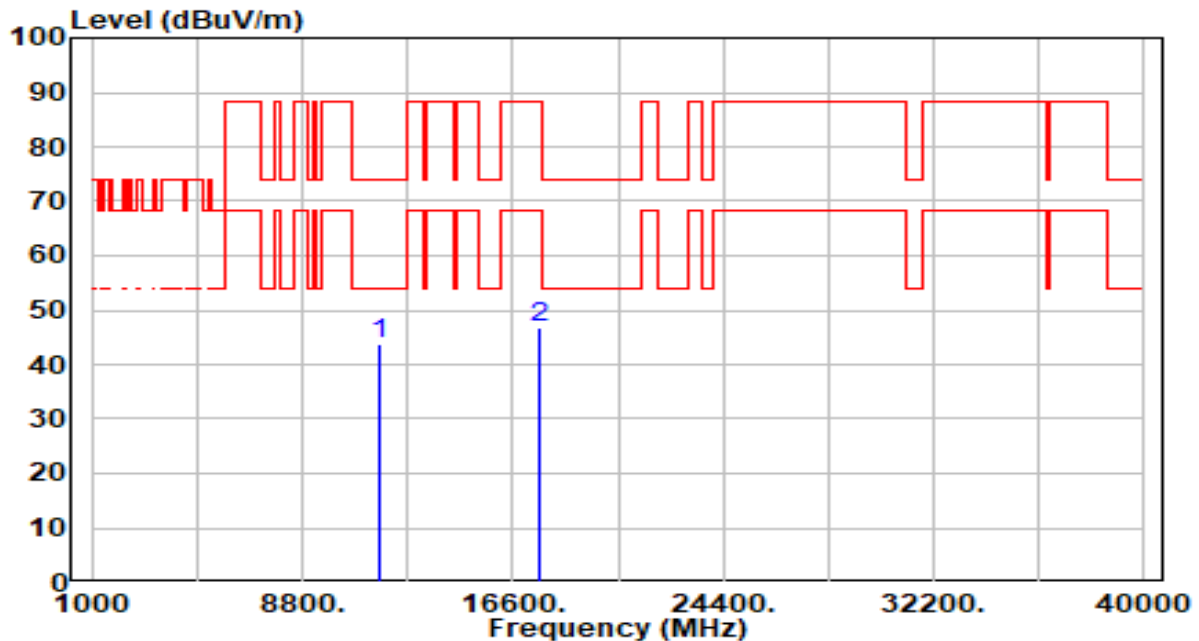


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11710.000	36.54	7.21	43.75	-30.25	74.00	100	104	Peak
2		17565.000	38.82	7.80	46.62	-41.58	88.20	100	202	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-20
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-80MHz_TX_5.9G Band_484+242Tone_PUN2_CH 171_ANT 6+7_Puncture Mode	Test Voltage	By Notebook PC

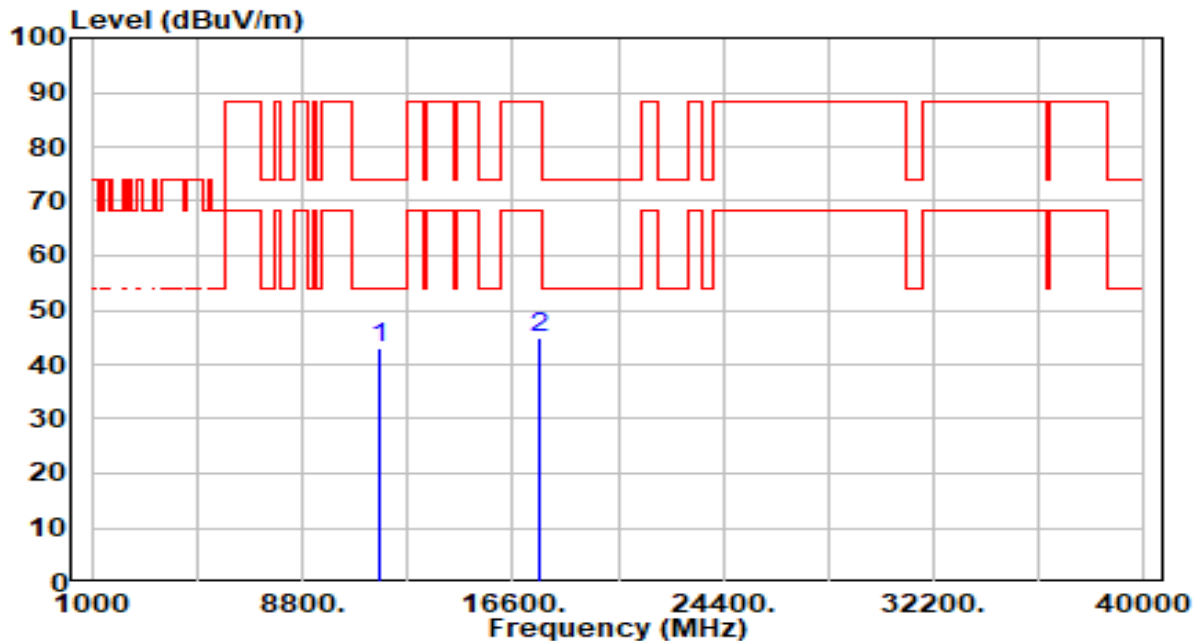


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11710.000	35.68	7.21	42.89	-31.11	74.00	100	226	Peak
2		17565.000	37.24	7.80	45.03	-43.17	88.20	100	251	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-20
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_TX_5.9G Band_996+484+242Tone_20-PUN1_CH 163_ANT 6+7_Puncture Mode	Test Voltage	By Notebook PC

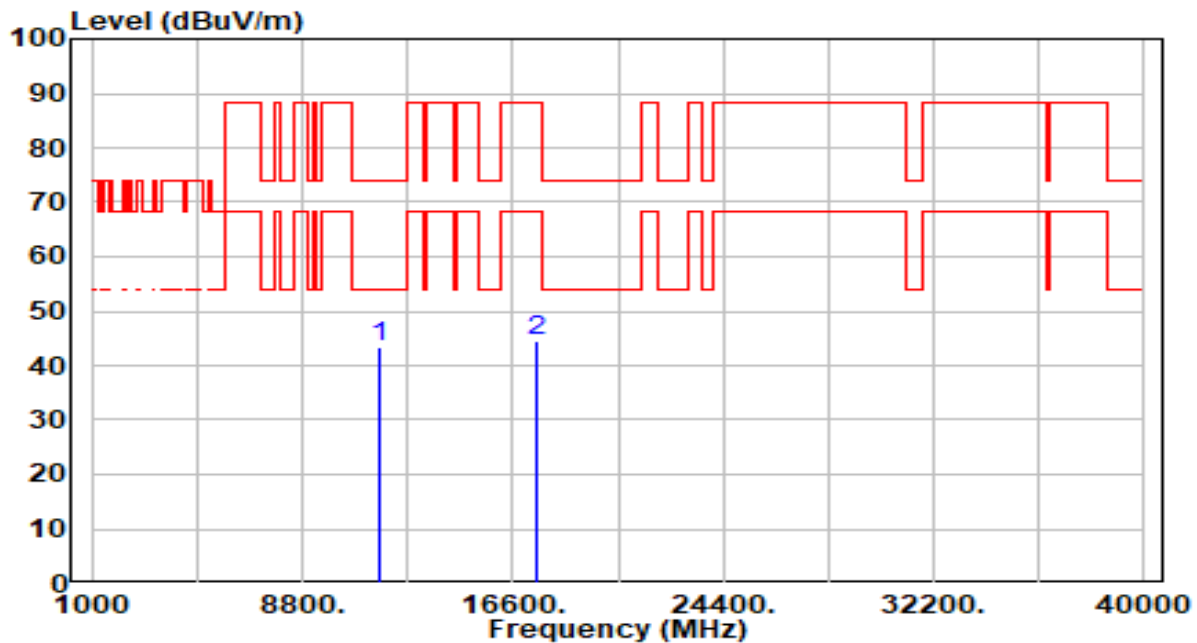


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11630.000	36.06	7.22	43.28	-30.72	74.00	100	188	Peak
2		17445.000	37.08	7.30	44.38	-43.82	88.20	100	298	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-20
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_TX_5.9G Band_996+484+242Tone_20-PUN1_CH 163_ANT 6+7_Puncture Mode	Test Voltage	By Notebook PC

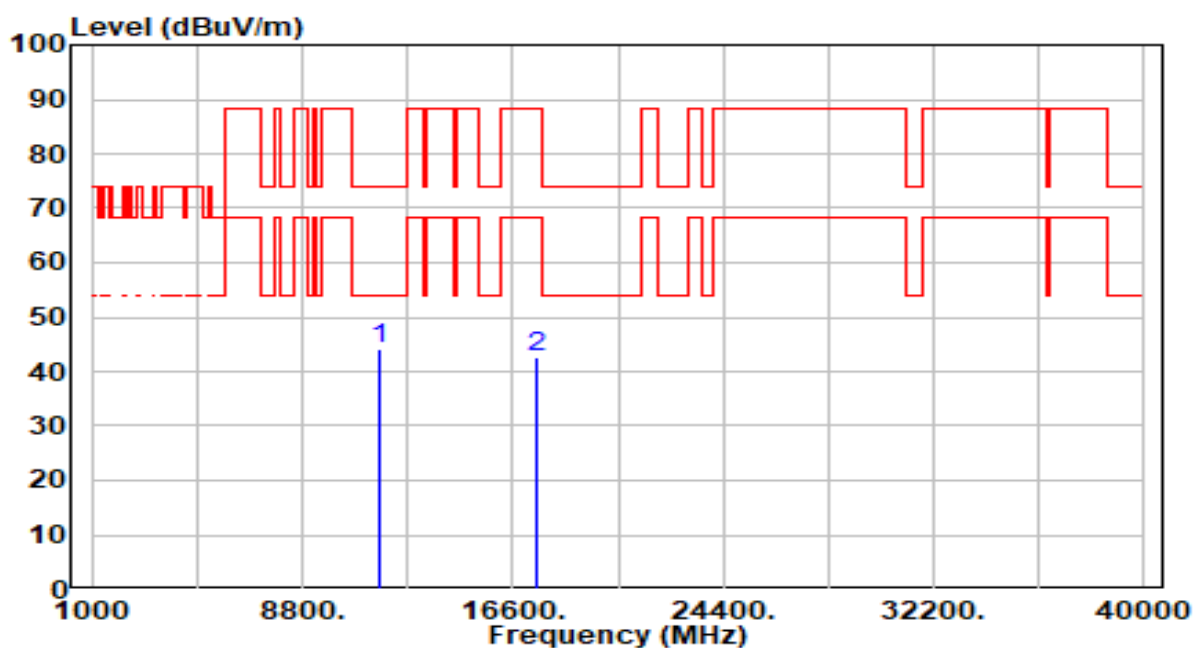


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11630.000	36.97	7.22	44.19	-29.81	74.00	100	132	Peak
2		17445.000	35.29	7.30	42.59	-45.61	88.20	100	268	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-20
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_TX_5.9G Band_996+484Tone_40-PUN4_CH 163_ANT 6+7_Puncture Mode	Test Voltage	By Notebook PC

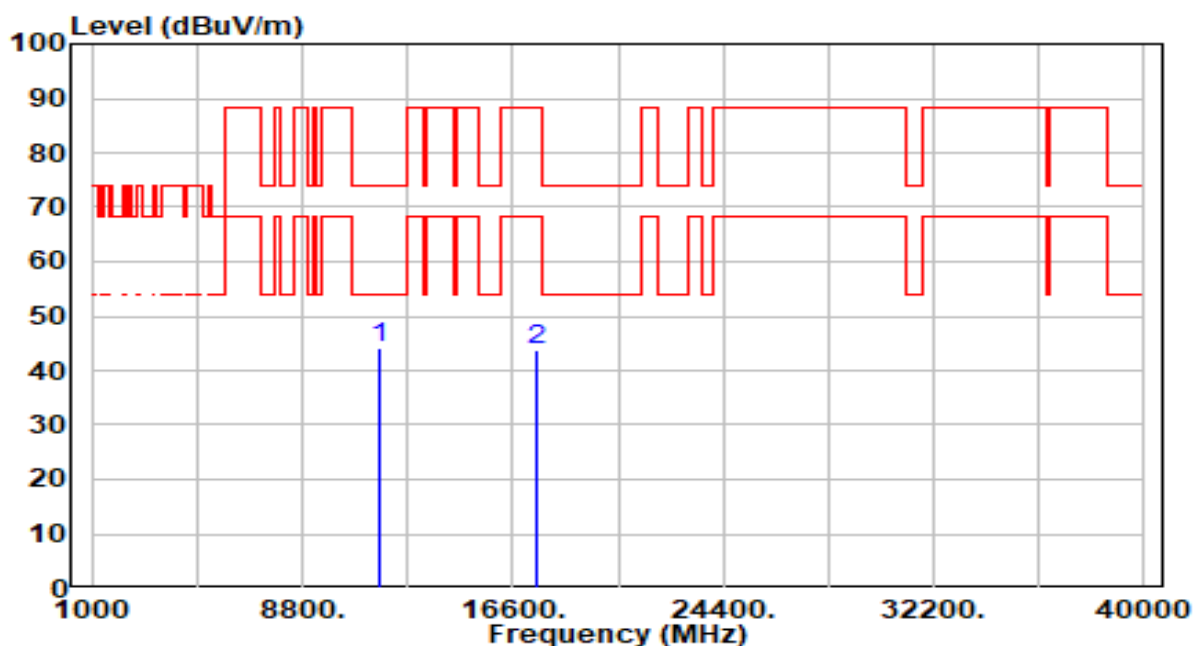


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11630.000	37.06	7.22	44.29	-29.71	74.00	100	324	Peak
2		17445.000	36.42	7.30	43.72	-44.48	88.20	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-20
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_TX_5.9G Band_996+484Tone_40-PUN4_CH 163_ANT 6+7_Puncture Mode	Test Voltage	By Notebook PC

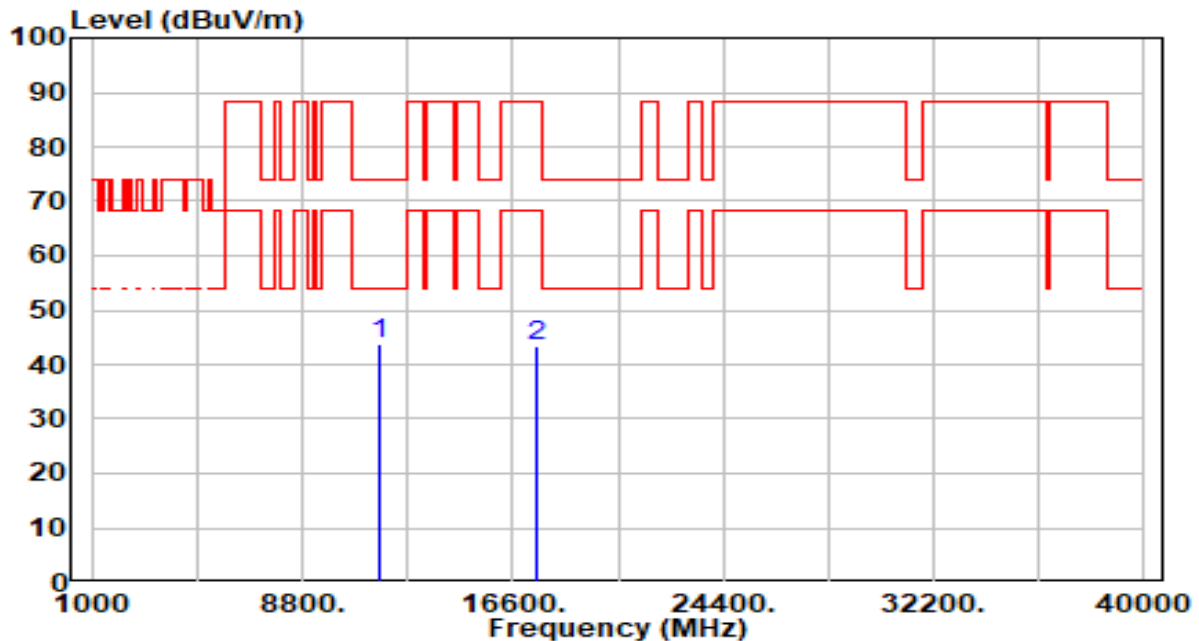

No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11630.000	36.50	7.22	43.72	-30.28	74.00	100	0	Peak
2		17445.000	36.12	7.30	43.42	-44.78	88.20	100	228	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.8. Radiated Restricted Band Edge Measurement

7.8.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42-16.423	399.9 - 410	4.5-5.15
¹ 0.495 - 0.505	16.69475-16.69525	608 - 614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960 - 1240	7.25-7.75
4.125-4.128	25.5 -25.67	1300 - 1427	8.025 - 8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660 - 1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123 - 138	2200 - 2300	14.47-14.5
8.291-8.294	149.9-150.05	2310 - 2390	15.35-16.2
8.362-8.366	156.52475-156.525	2483.5 - 2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690 - 2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260 - 3267	23.6-24.0
12.29-12.293	167.72-173.2	3332 - 3339	31.2-31.8
12.51975-12.52025	240 - 285	3345.8 - 3358	36.43-36.5
12.57675-12.57725	322-335.4	3600 - 4400	(²)
13.36-13.41	--	--	--

For 15.407(b) requirement:

For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

For an indoor access point, all emissions at or above 5.895GHz shall not exceed an e.i.r.p. of 15 dBm/MHz and shall decrease linearly to an e.i.r.p. of -7 dBm/MHz at or above 5.925GHz.

For indoor access point or subordinate device, all emissions below 5.725 GHz shall not exceed an e.i.r.p. of -27 dBm/MHz at 5.65 GHz increasing linearly to 10 dBm/MHz at 5.7 GHz, and from 5.7 GHz increasing linearly to a level of 15.6 dBm/MHz at 5.72 GHz, and from 5.72 GHz increasing linearly to a level of 27 dBm/MHz at 5.725 GHz.

$E \text{ [dB}\mu\text{V/m]} = \text{EIRP [dBm]} + 95.2$, for example, -27 dBm/MHz = 68.2 dB μ V/m.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.8.2.Test Procedure Used

KDB 789033 D02v02r01- Section G


7.8.3.Test Setting

Peak Measurements above 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize


Average Measurements above 1GHz (Method VB)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW If the EUT is configured to transmit with duty cycle $\geq 98\%$, set $VBW \leq RBW/100$ (i.e., 10 kHz) but not less than 10 Hz. If the EUT duty cycle is $< 98\%$, set $VBW \geq 1/T$.
4. Detector = Peak
5. Sweep time = auto
6. Allow max hold to run for at least 50 traces if the transmitted signal is continuous or has at least 98% duty cycle. For lower duty cycles, increase the minimum number of traces by a factor of $1/x$, where x is the duty cycle.

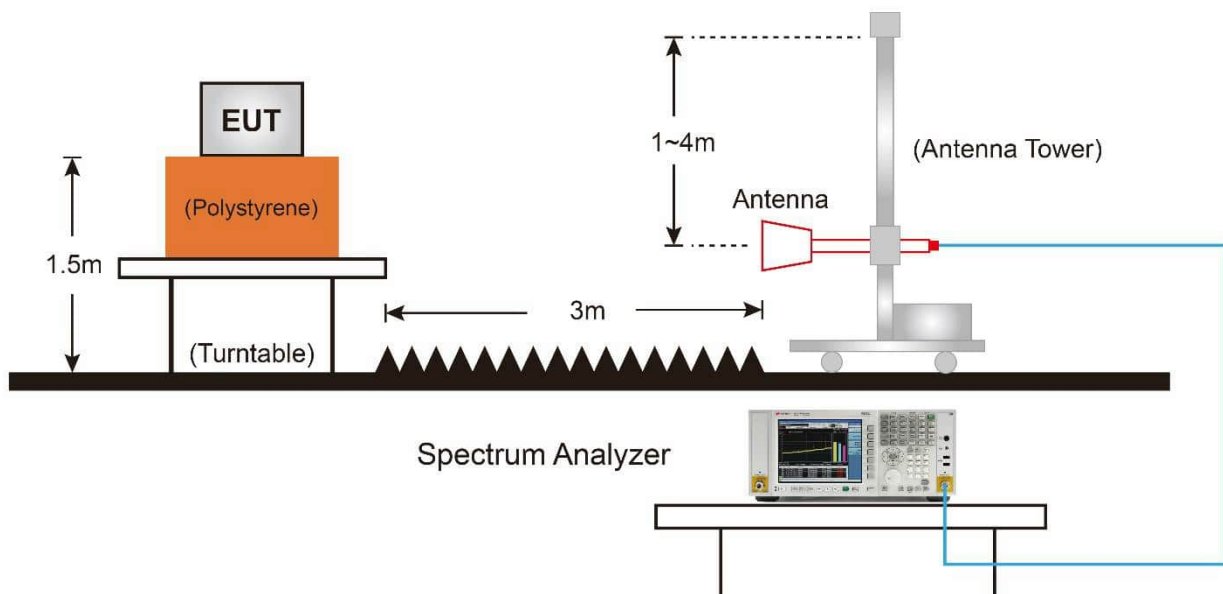7.8.4. Test Setup

7.8.5. Test Result

EUT	Mobile Computer	Date of Test	2025-07-02
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11a_TX_5.9G Band_CH 169_ANT 6+7	Test Voltage	By Notebook PC

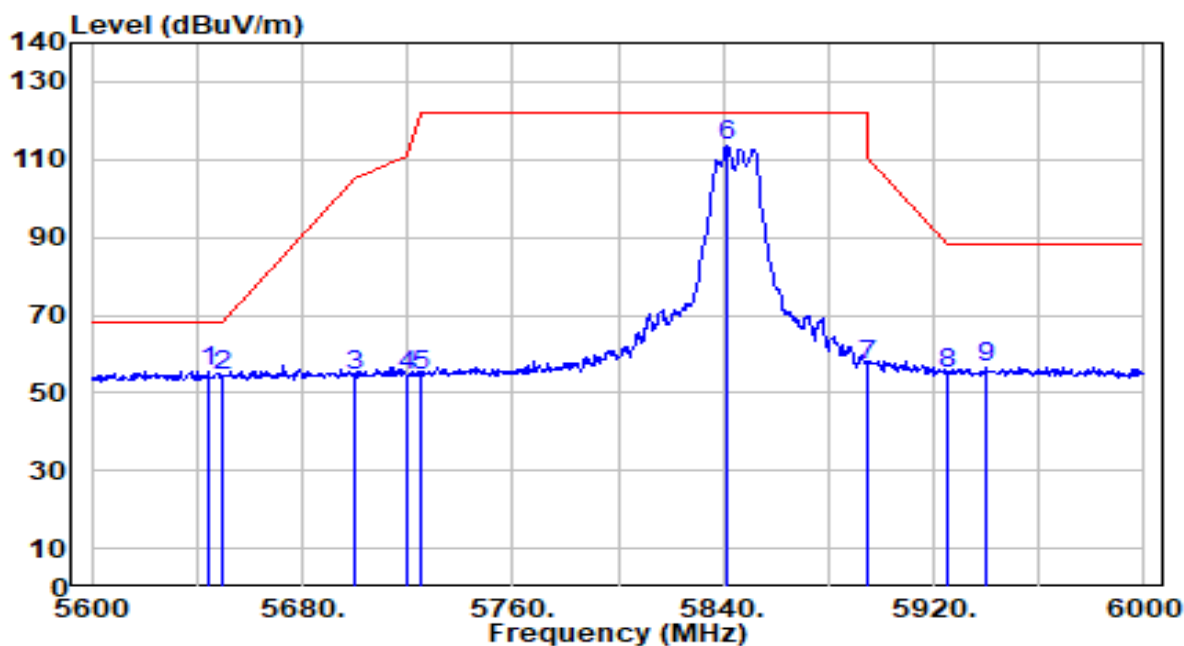


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5644.000	52.69	2.82	55.51	-12.69	68.20	269	50	Peak
2		5650.000	51.38	2.86	54.24	-13.96	68.20	269	50	Peak
3		5700.000	51.55	3.12	54.67	-50.53	105.20	269	50	Peak
4		5720.000	51.05	3.23	54.28	-56.52	110.80	269	50	Peak
5		5725.000	51.31	3.25	54.56	-67.64	122.20	269	50	Peak
6		5841.200	109.70	3.63	113.34	N/A	N/A	269	50	Peak
7		5895.000	53.51	3.60	57.11	-53.09	110.20	269	50	Peak
8		5925.000	51.49	3.59	55.08	-33.12	88.20	269	50	Peak
9		5940.400	53.14	3.59	56.73	-31.47	88.20	269	50	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-02
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11a_TX_5.9G Band_CH 169_ANT 6+7	Test Voltage	By Notebook PC

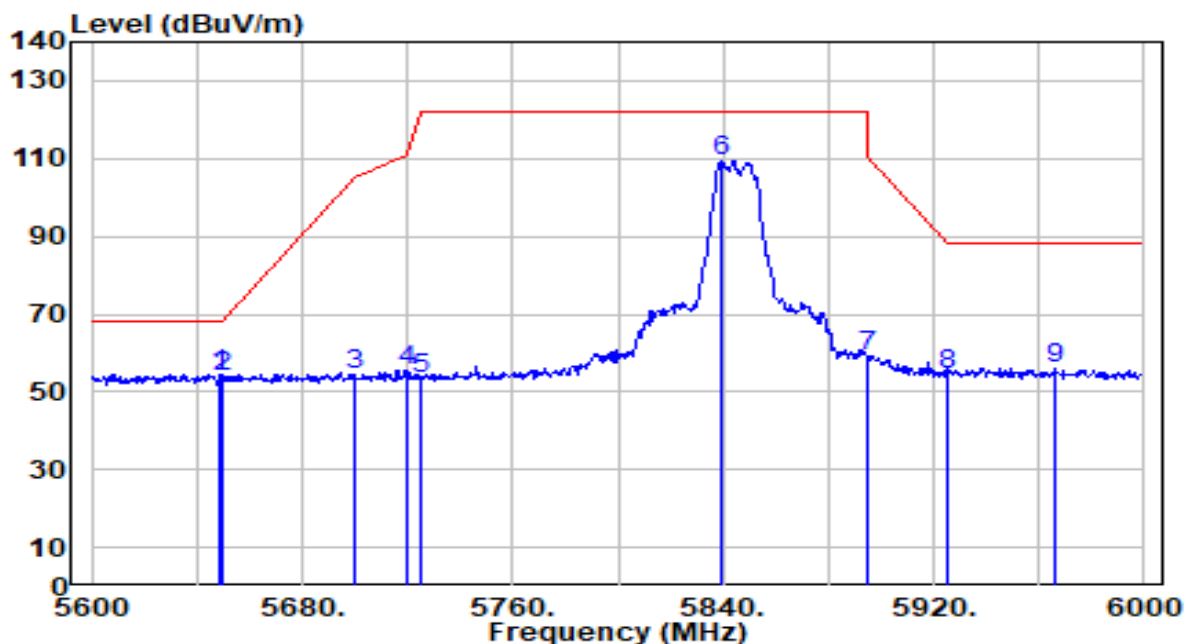


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5648.800	51.56	2.85	54.41	-13.79	68.20	126	338	Peak
2		5650.000	50.79	2.86	53.64	-14.56	68.20	126	338	Peak
3		5700.000	51.45	3.12	54.56	-50.64	105.20	126	338	Peak
4		5720.000	52.25	3.23	55.47	-55.33	110.80	126	338	Peak
5		5725.000	50.26	3.25	53.51	-68.69	122.20	126	338	Peak
6		5839.200	105.80	3.64	109.44	N/A	N/A	126	338	Peak
7		5895.000	55.67	3.60	59.27	-50.93	110.20	126	338	Peak
8		5925.000	50.71	3.59	54.30	-33.90	88.20	126	338	Peak
9		5966.400	52.35	3.59	55.94	-32.26	88.20	126	338	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-02
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11a_TX_5.9G Band_CH 173_ANT 6+7	Test Voltage	By Notebook PC

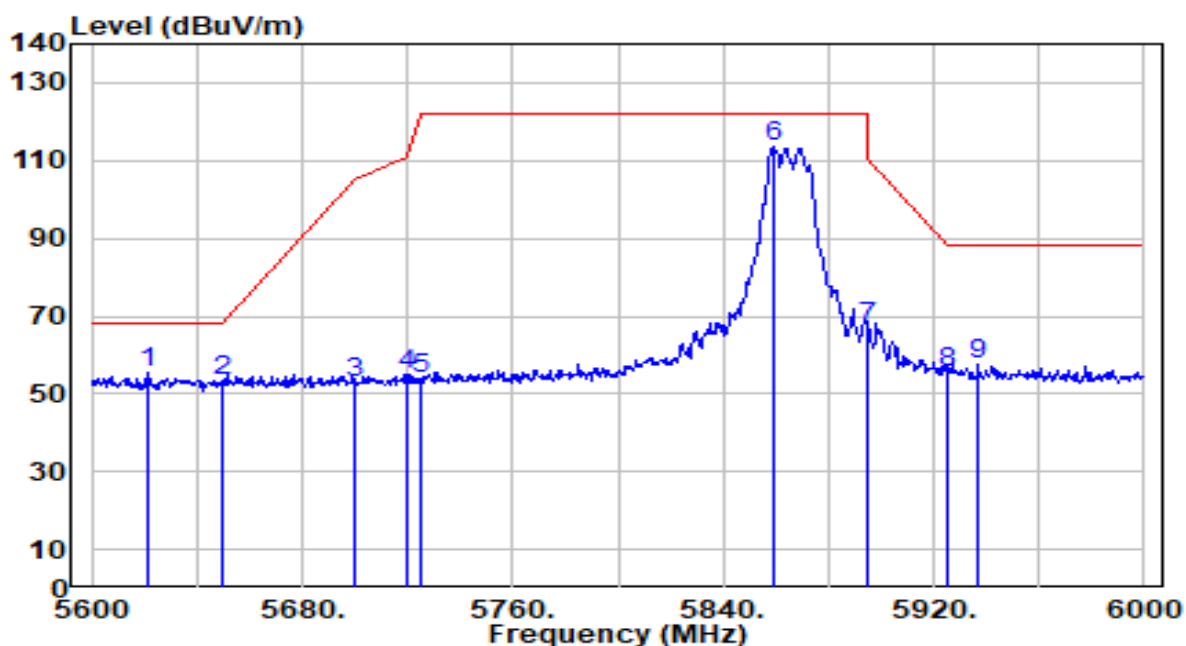


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5621.600	52.64	2.71	55.35	-12.85	68.20	216	0	Peak
2		5650.000	50.46	2.86	53.31	-14.89	68.20	216	0	Peak
3		5700.000	49.92	3.12	53.04	-52.16	105.20	216	0	Peak
4		5720.000	51.60	3.23	54.83	-55.97	110.80	216	0	Peak
5		5725.000	50.67	3.25	53.92	-68.28	122.20	216	0	Peak
6		5859.600	110.01	3.62	113.63	N/A	N/A	216	0	Peak
7		5895.000	63.61	3.60	67.21	-42.99	110.20	216	0	Peak
8		5925.000	51.86	3.59	55.45	-32.75	88.20	216	0	Peak
9		5936.800	53.99	3.59	57.58	-30.62	88.20	216	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-02
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11a_TX_5.9G Band_CH 173_ANT 6+7	Test Voltage	By Notebook PC

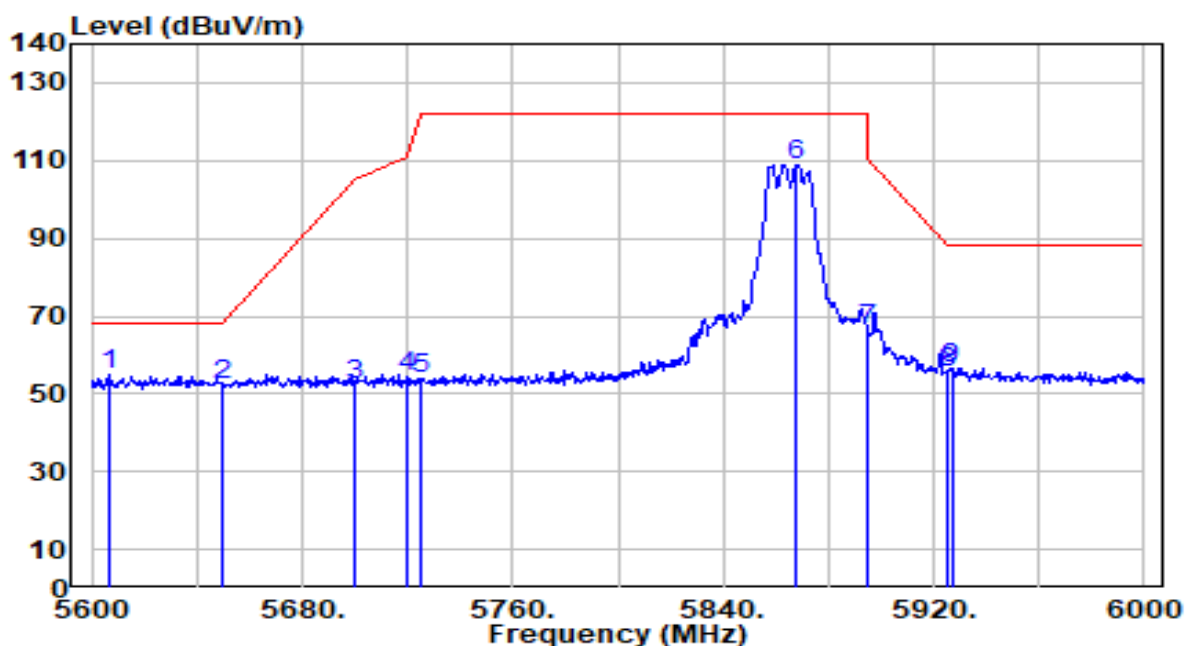


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5606.800	52.34	2.63	54.97	-13.23	68.20	100	68	Peak
2		5650.000	49.63	2.86	52.48	-15.72	68.20	100	68	Peak
3		5700.000	49.38	3.12	52.50	-52.70	105.20	100	68	Peak
4		5720.000	51.25	3.23	54.48	-56.32	110.80	100	68	Peak
5		5725.000	50.89	3.25	54.14	-68.06	122.20	100	68	Peak
6		5868.000	105.30	3.62	108.92	N/A	N/A	100	68	Peak
7		5895.000	63.08	3.60	66.68	-43.52	110.20	100	68	Peak
8		5925.000	52.06	3.59	55.65	-32.55	88.20	100	68	Peak
9		5926.800	52.87	3.59	56.46	-31.74	88.20	100	68	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-02
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11a_TX_5.9G Band_CH 177_ANT 6+7	Test Voltage	By Notebook PC

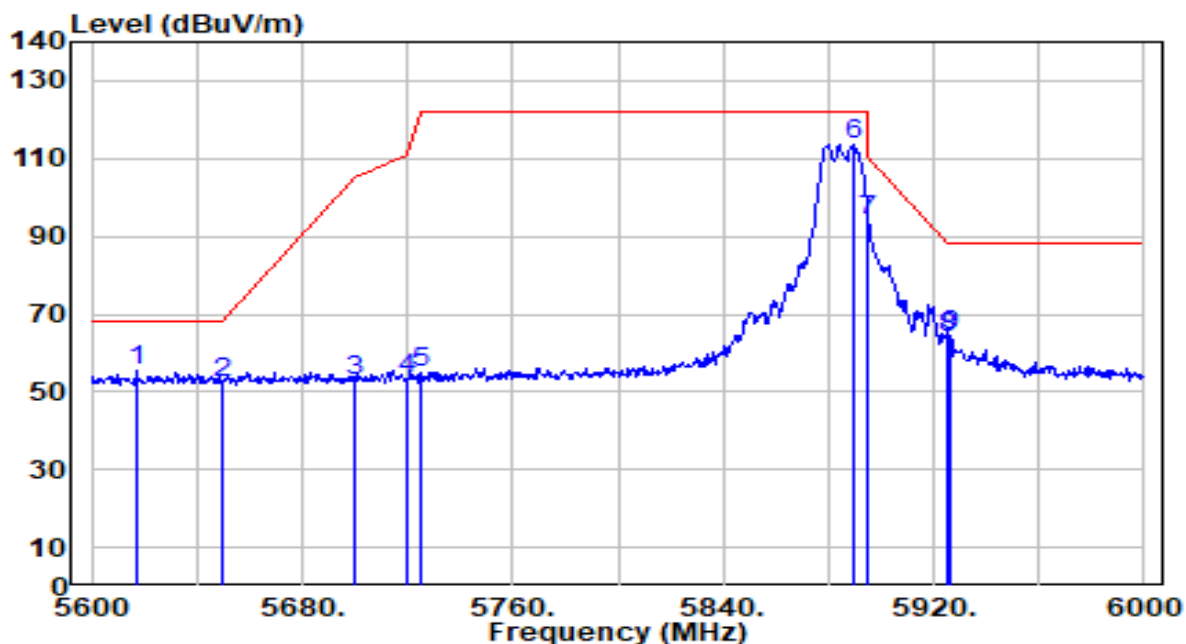


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5616.800	52.56	2.68	55.25	-12.95	68.20	229	360	Peak
2		5650.000	49.42	2.86	52.28	-15.92	68.20	229	360	Peak
3		5700.000	49.72	3.12	52.83	-52.37	105.20	229	360	Peak
4		5720.000	50.11	3.23	53.34	-57.46	110.80	229	360	Peak
5		5725.000	51.79	3.25	55.05	-67.15	122.20	229	360	Peak
6		5889.200	109.92	3.60	113.53	N/A	N/A	229	360	Peak
7		5895.000	90.36	3.60	93.96	-16.24	110.20	229	360	Peak
8		5925.000	60.51	3.59	64.10	-24.10	88.20	229	360	Peak
9		5926.400	60.67	3.59	64.26	-23.94	88.20	229	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-02
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11a_TX_5.9G Band_CH 177_ANT 6+7	Test Voltage	By Notebook PC

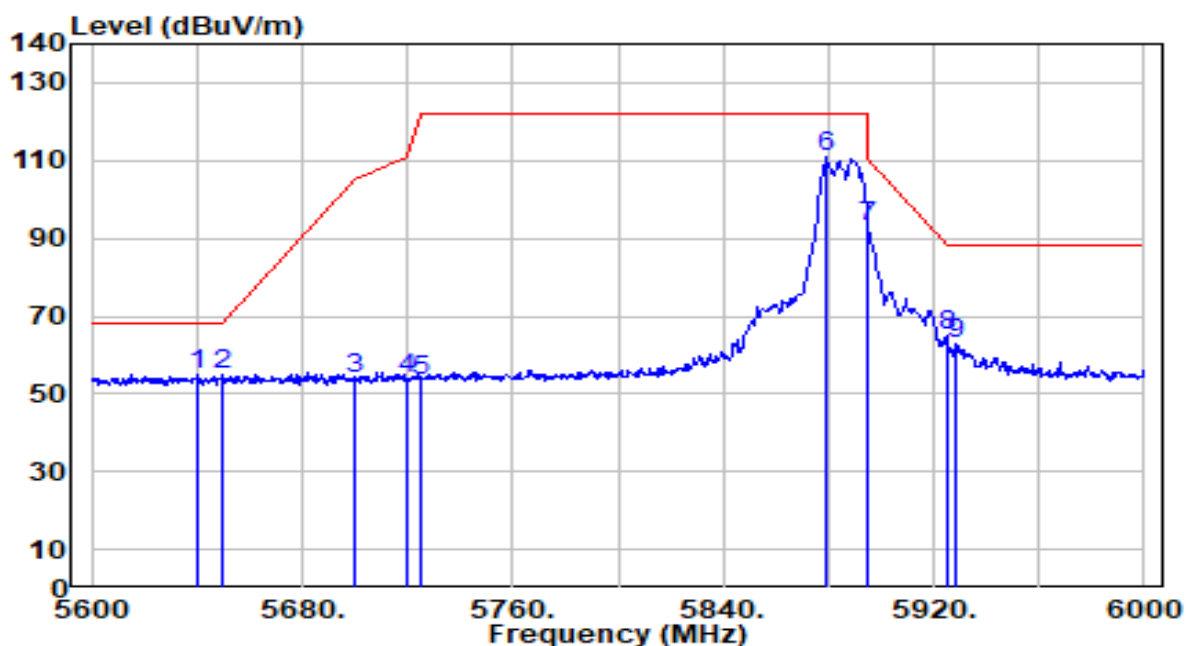


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5640.400	52.03	2.81	54.84	-13.36	68.20	100	335	Peak
2		5650.000	51.84	2.86	54.69	-13.51	68.20	100	335	Peak
3		5700.000	50.66	3.12	53.78	-51.42	105.20	100	335	Peak
4		5720.000	50.45	3.23	53.68	-57.12	110.80	100	335	Peak
5		5725.000	50.31	3.25	53.57	-68.63	122.20	100	335	Peak
6		5879.200	107.54	3.61	111.15	N/A	N/A	100	335	Peak
7		5895.000	89.14	3.60	92.74	-17.46	110.20	100	335	Peak
8		5925.000	61.17	3.59	64.76	-23.44	88.20	100	335	Peak
9		5928.800	59.16	3.59	62.75	-25.45	88.20	100	335	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-02
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-20MHz_TX_5.9G Band_CH 169_ANT 6+7	Test Voltage	By Notebook PC

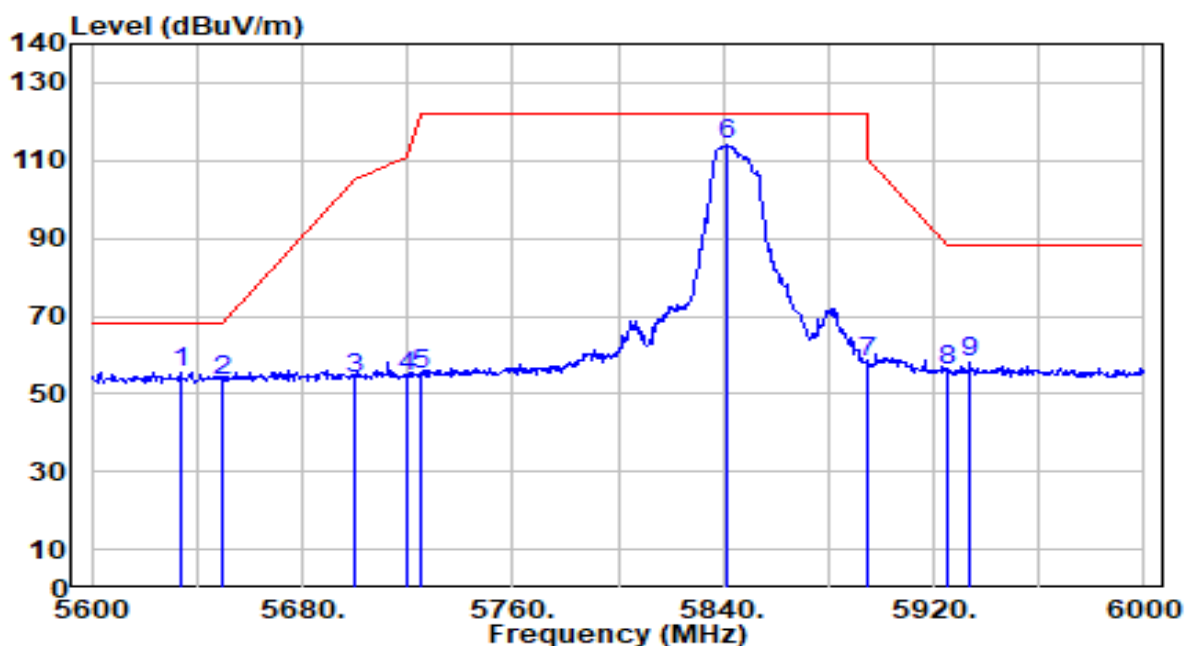


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5633.600	52.87	2.77	55.64	-12.56	68.20	218	0	Peak
2		5650.000	50.63	2.86	53.48	-14.72	68.20	218	0	Peak
3		5700.000	50.90	3.12	54.01	-51.19	105.20	218	0	Peak
4		5720.000	51.44	3.23	54.67	-56.13	110.80	218	0	Peak
5		5725.000	51.43	3.25	54.68	-67.52	122.20	218	0	Peak
6		5841.600	110.54	3.63	114.17	N/A	N/A	218	0	Peak
7		5895.000	54.71	3.60	58.31	-51.89	110.20	218	0	Peak
8		5925.000	52.46	3.59	56.05	-32.15	88.20	218	0	Peak
9		5933.600	54.33	3.59	57.92	-30.28	88.20	218	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-02
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-20MHz_TX_5.9G Band_CH 169_ANT 6+7	Test Voltage	By Notebook PC

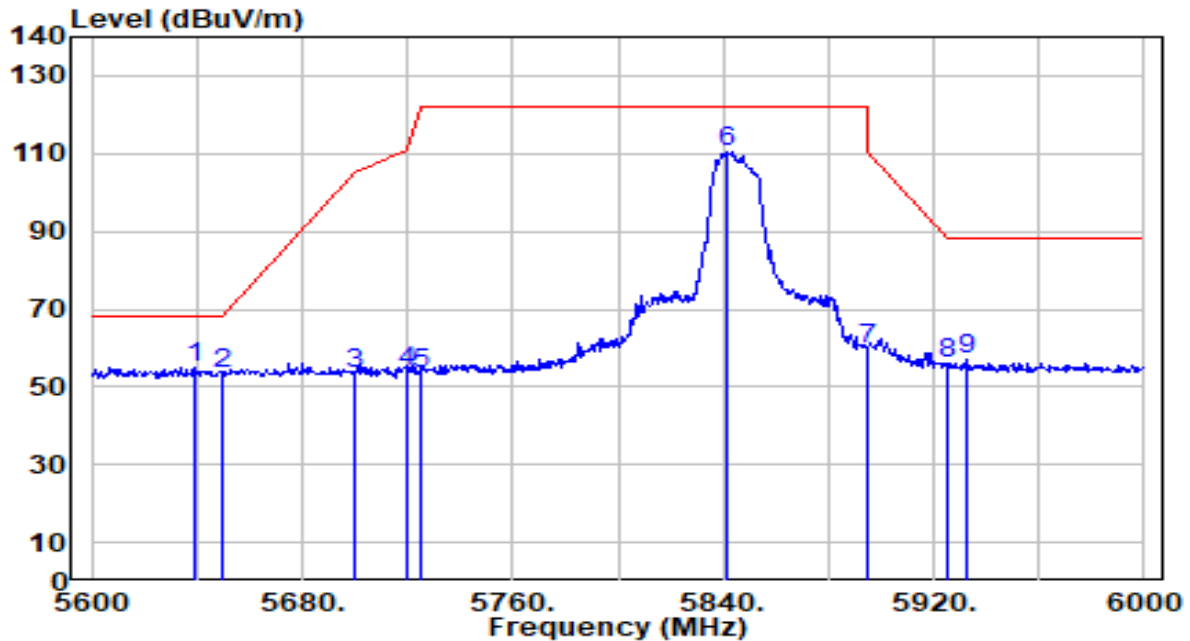


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5639.200	52.32	2.80	55.12	-13.08	68.20	100	333	Peak
2		5650.000	50.52	2.86	53.37	-14.83	68.20	100	333	Peak
3		5700.000	50.36	3.12	53.48	-51.72	105.20	100	333	Peak
4		5720.000	50.72	3.23	53.95	-56.85	110.80	100	333	Peak
5		5725.000	50.35	3.25	53.60	-68.60	122.20	100	333	Peak
6		5841.600	106.63	3.63	110.26	N/A	N/A	100	333	Peak
7		5895.000	56.13	3.60	59.73	-50.47	110.20	100	333	Peak
8		5925.000	52.28	3.59	55.87	-32.33	88.20	100	333	Peak
9		5932.800	53.36	3.59	56.95	-31.25	88.20	100	333	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-02
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-20MHz_TX_5.9G Band_CH 173_ANT 6+7	Test Voltage	By Notebook PC

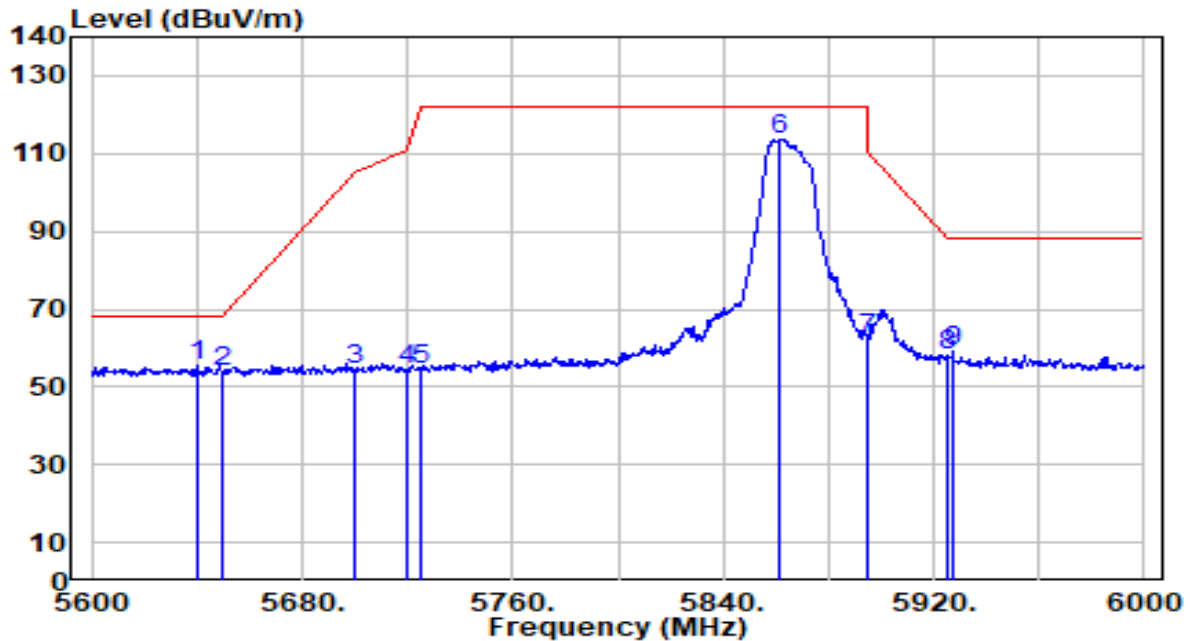


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5640.000	52.90	2.80	55.71	-12.49	68.20	218	0	Peak
2		5650.000	50.97	2.86	53.83	-14.37	68.20	218	0	Peak
3		5700.000	51.29	3.12	54.41	-50.79	105.20	218	0	Peak
4		5720.000	51.31	3.23	54.53	-56.27	110.80	218	0	Peak
5		5725.000	51.20	3.25	54.46	-67.74	122.20	218	0	Peak
6		5861.200	110.16	3.62	113.78	N/A	N/A	218	0	Peak
7		5895.000	58.50	3.60	62.10	-48.10	110.20	218	0	Peak
8		5925.000	54.55	3.59	58.14	-30.06	88.20	218	0	Peak
9		5927.200	55.34	3.59	58.93	-29.27	88.20	218	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-02
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-20MHz_TX_5.9G Band_CH 173_ANT 6+7	Test Voltage	By Notebook PC

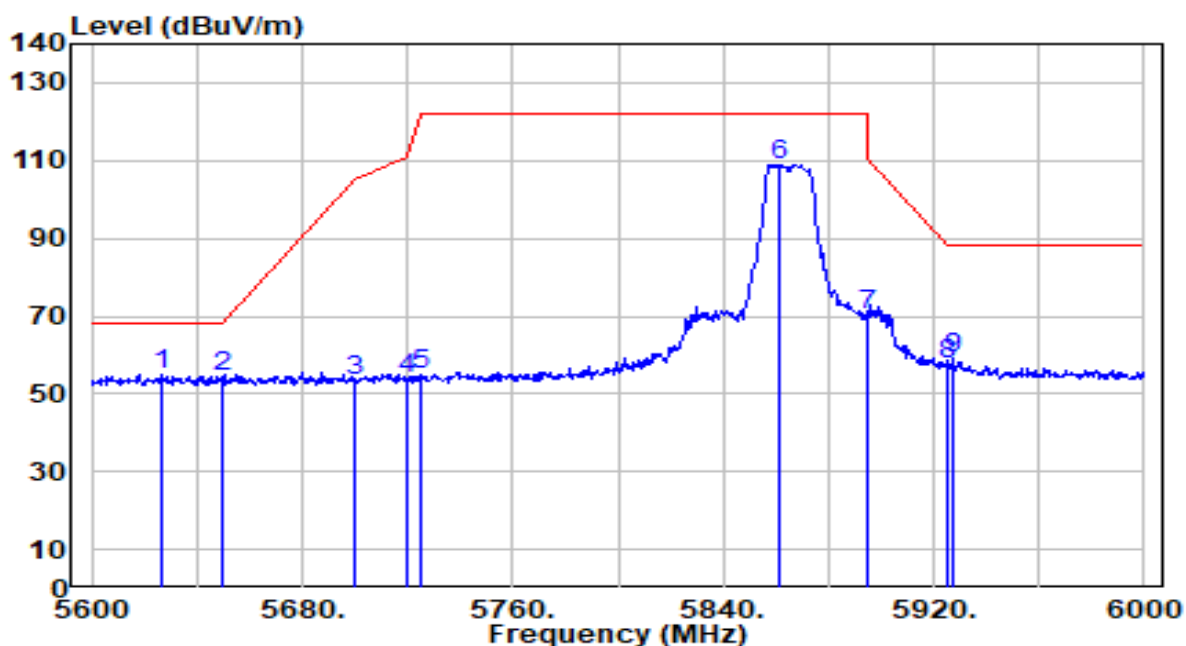


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5626.800	52.11	2.73	54.85	-13.35	68.20	100	325	Peak
2		5650.000	51.54	2.86	54.39	-13.81	68.20	100	325	Peak
3		5700.000	50.16	3.12	53.27	-51.93	105.20	100	325	Peak
4		5720.000	50.52	3.23	53.75	-57.05	110.80	100	325	Peak
5		5725.000	51.65	3.25	54.90	-67.30	122.20	100	325	Peak
6		5861.200	105.35	3.62	108.97	N/A	N/A	100	325	Peak
7		5895.000	66.71	3.60	70.31	-39.89	110.20	100	325	Peak
8		5925.000	54.04	3.59	57.63	-30.57	88.20	100	325	Peak
9		5927.600	55.38	3.59	58.97	-29.23	88.20	100	325	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-02
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-20MHz_TX_5.9G Band_CH 177_ANT 6+7	Test Voltage	By Notebook PC

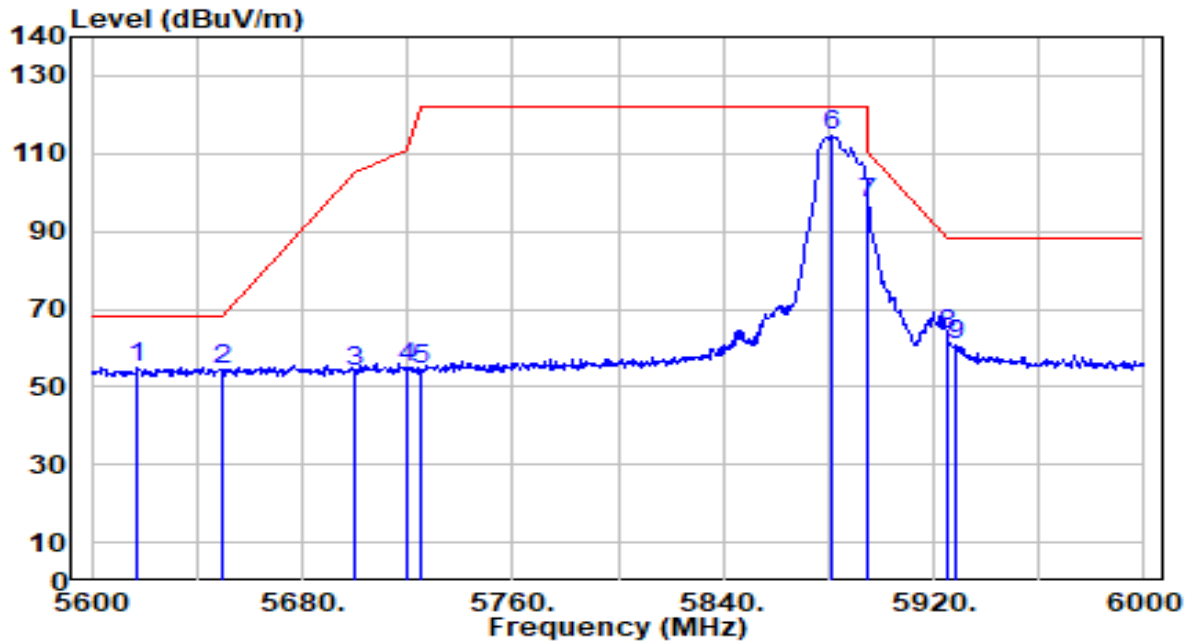


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5617.200	52.36	2.68	55.04	-13.16	68.20	203	0	Peak
2	5650.000	51.42	2.86	54.27	-13.93	68.20	203	0	Peak
3	5700.000	50.94	3.12	54.06	-51.14	105.20	203	0	Peak
4	5720.000	51.52	3.23	54.75	-56.05	110.80	203	0	Peak
5	5725.000	51.09	3.25	54.34	-67.86	122.20	203	0	Peak
6	5881.200	110.84	3.61	114.45	N/A	N/A	203	0	Peak
7	* 5895.000	93.49	3.60	97.09	-13.11	110.20	203	0	Peak
8	5925.000	59.88	3.59	63.47	-24.73	88.20	203	0	Peak
9	5928.000	57.18	3.59	60.77	-27.43	88.20	203	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-02
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-20MHz_TX_5.9G Band_CH 177_ANT 6+7	Test Voltage	By Notebook PC

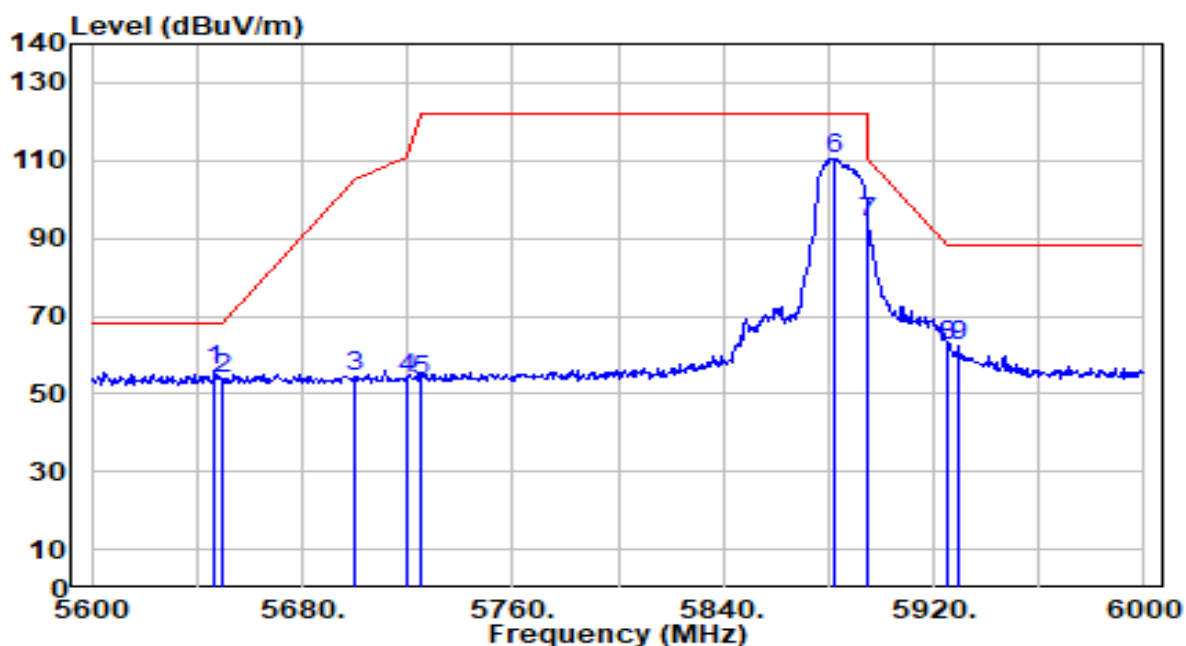


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5646.400	53.14	2.84	55.98	-12.22	68.20	104	329	Peak
2		5650.000	51.03	2.86	53.88	-14.32	68.20	104	329	Peak
3		5700.000	51.21	3.12	54.33	-50.87	105.20	104	329	Peak
4		5720.000	50.88	3.23	54.11	-56.69	110.80	104	329	Peak
5		5725.000	50.15	3.25	53.41	-68.79	122.20	104	329	Peak
6		5882.400	106.93	3.61	110.54	N/A	N/A	104	329	Peak
7		5895.000	90.39	3.60	93.99	-16.21	110.20	104	329	Peak
8		5925.000	58.61	3.59	62.20	-26.00	88.20	104	329	Peak
9		5929.200	58.53	3.59	62.13	-26.07	88.20	104	329	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-02
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-40MHz_TX_5.9G Band_CH 167_ANT 6+7	Test Voltage	By Notebook PC

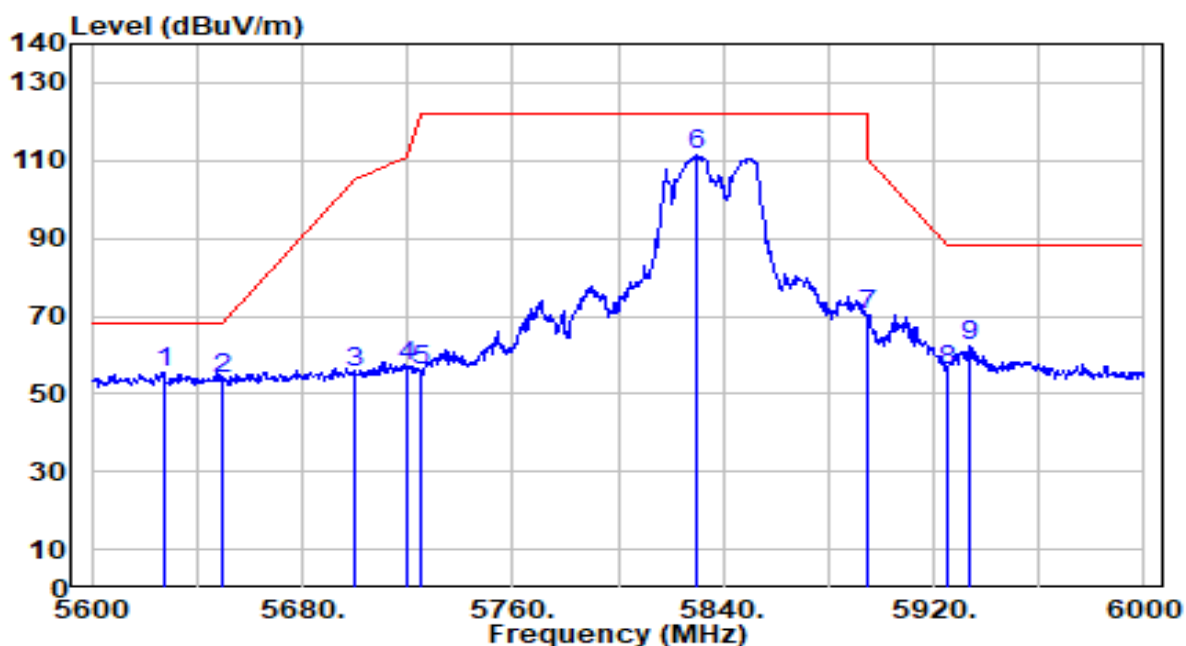


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5627.600	52.73	2.74	55.47	-12.73	68.20	222	336	Peak
2		5650.000	50.99	2.86	53.85	-14.35	68.20	222	336	Peak
3		5700.000	52.30	3.12	55.42	-49.78	105.20	222	336	Peak
4		5720.000	53.73	3.23	56.95	-53.85	110.80	222	336	Peak
5		5725.000	52.99	3.25	56.24	-65.96	122.20	222	336	Peak
6		5829.600	107.58	3.64	111.22	N/A	N/A	222	336	Peak
7		5895.000	66.77	3.60	70.37	-39.83	110.20	222	336	Peak
8		5925.000	52.53	3.59	56.13	-32.07	88.20	222	336	Peak
9		5933.600	58.80	3.59	62.39	-25.81	88.20	222	336	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-02
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-40MHz_TX_5.9G Band_CH 167_ANT 6+7	Test Voltage	By Notebook PC

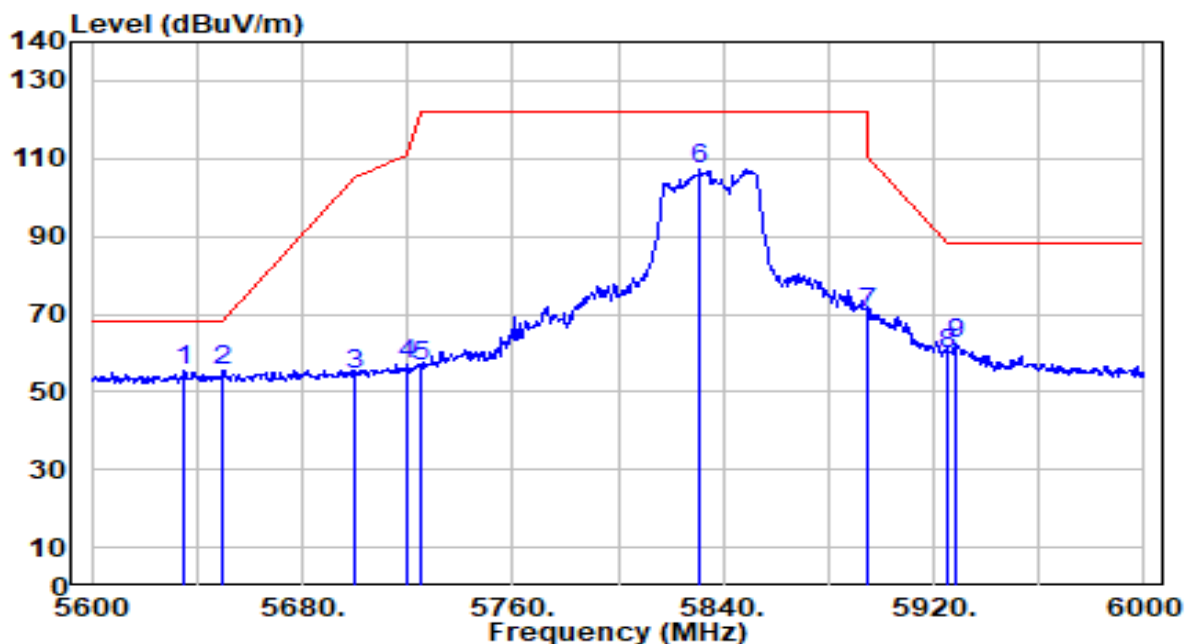


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5635.200	52.62	2.78	55.39	-12.81	68.20	100	335	Peak
2	*	5650.000	52.74	2.86	55.59	-12.61	68.20	100	335	Peak
3		5700.000	51.29	3.12	54.41	-50.79	105.20	100	335	Peak
4		5720.000	53.85	3.23	57.07	-53.73	110.80	100	335	Peak
5		5725.000	53.50	3.25	56.75	-65.45	122.20	100	335	Peak
6		5831.200	103.53	3.64	107.17	N/A	N/A	100	335	Peak
7		5895.000	66.57	3.60	70.17	-40.03	110.20	100	335	Peak
8		5925.000	56.36	3.59	59.95	-28.25	88.20	100	335	Peak
9		5928.000	58.97	3.59	62.56	-25.64	88.20	100	335	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-02
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-40MHz_TX_5.9G Band_CH 175_ANT 6+7	Test Voltage	By Notebook PC

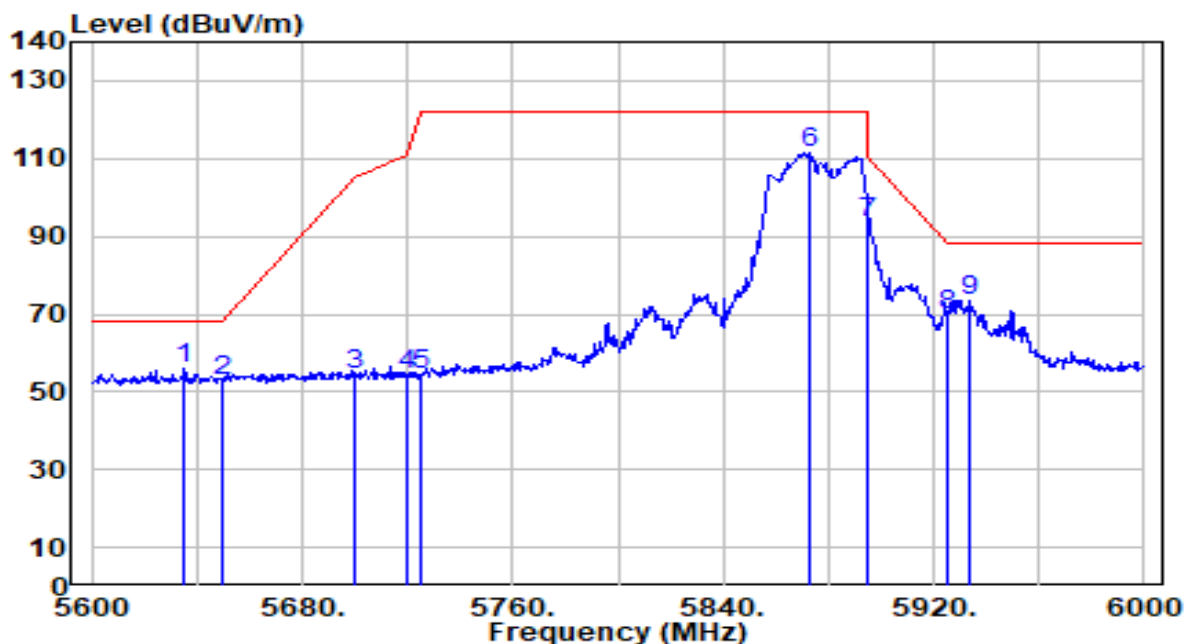


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5635.200	53.08	2.78	55.85	-12.35	68.20	224	0	Peak
2		5650.000	50.21	2.86	53.06	-15.14	68.20	224	0	Peak
3		5700.000	51.16	3.12	54.27	-50.93	105.20	224	0	Peak
4		5720.000	50.93	3.23	54.16	-56.64	110.80	224	0	Peak
5		5725.000	51.35	3.25	54.61	-67.59	122.20	224	0	Peak
6		5872.800	107.73	3.61	111.34	N/A	N/A	224	0	Peak
7		5895.000	90.15	3.60	93.75	-16.45	110.20	224	0	Peak
8		5925.000	66.29	3.59	69.88	-18.32	88.20	224	0	Peak
9		5933.200	70.01	3.59	73.60	-14.60	88.20	224	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-02
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-40MHz_TX_5.9G Band_CH 175_ANT 6+7	Test Voltage	By Notebook PC

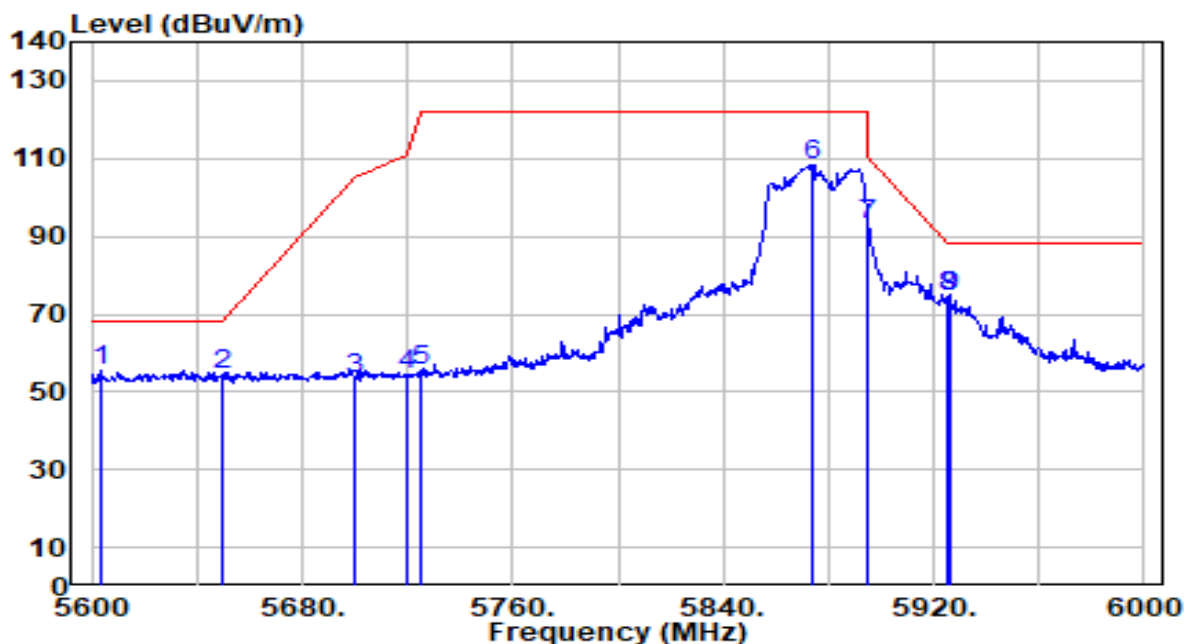


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5604.000	52.96	2.61	55.58	-12.62	68.20	106	334	Peak
2		5650.000	51.69	2.86	54.55	-13.65	68.20	106	334	Peak
3		5700.000	50.38	3.12	53.50	-51.70	105.20	106	334	Peak
4		5720.000	51.25	3.23	54.48	-56.32	110.80	106	334	Peak
5		5725.000	52.27	3.25	55.52	-66.68	122.20	106	334	Peak
6		5874.000	104.87	3.61	108.48	N/A	N/A	106	334	Peak
7		5895.000	89.16	3.60	92.76	-17.44	110.20	106	334	Peak
8		5925.000	71.09	3.59	74.68	-13.52	88.20	106	334	Peak
9		5926.400	70.78	3.59	74.37	-13.83	88.20	106	334	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-02
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-80MHz_TX_5.9G Band_CH 171_ANT 6+7	Test Voltage	By Notebook PC

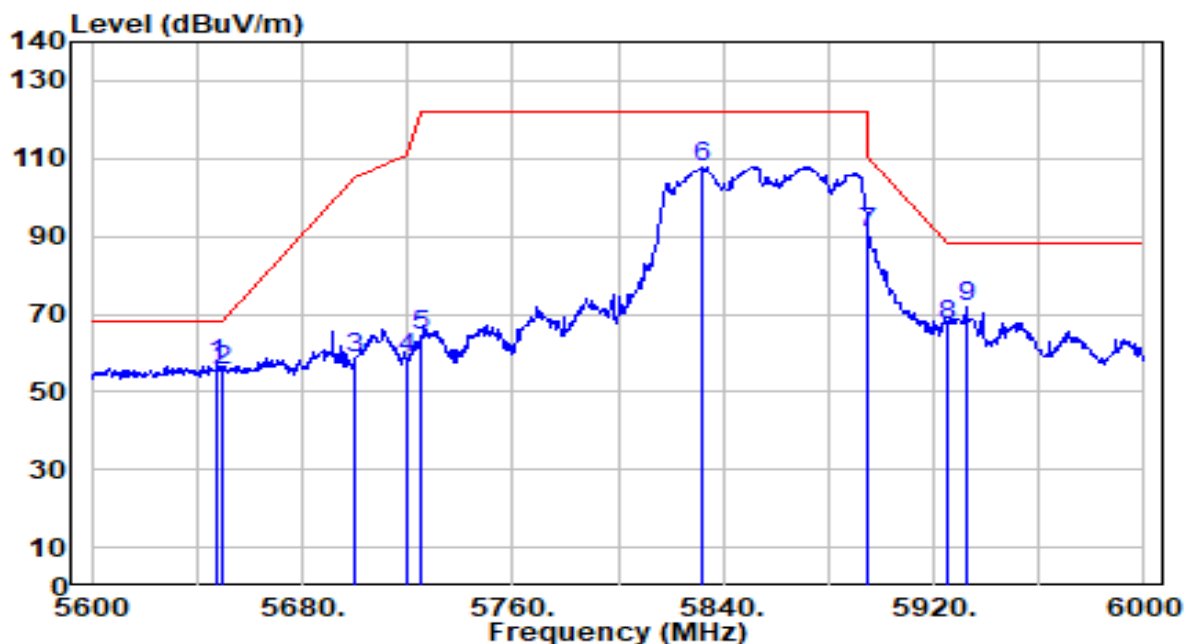


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5647.600	54.20	2.84	57.05	-11.15	68.20	212	0	Peak
2		5650.000	52.84	2.86	55.70	-12.50	68.20	212	0	Peak
3		5700.000	55.78	3.12	58.90	-46.30	105.20	212	0	Peak
4		5720.000	55.19	3.23	58.41	-52.39	110.80	212	0	Peak
5		5725.000	60.97	3.25	64.22	-57.98	122.20	212	0	Peak
6		5832.000	104.21	3.64	107.85	N/A	N/A	212	0	Peak
7		5895.000	87.18	3.60	90.78	-19.42	110.20	212	0	Peak
8		5925.000	63.25	3.59	66.84	-21.36	88.20	212	0	Peak
9		5932.400	68.20	3.59	71.79	-16.41	88.20	212	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-02
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-80MHz_TX_5.9G Band_CH 171_ANT 6+7	Test Voltage	By Notebook PC

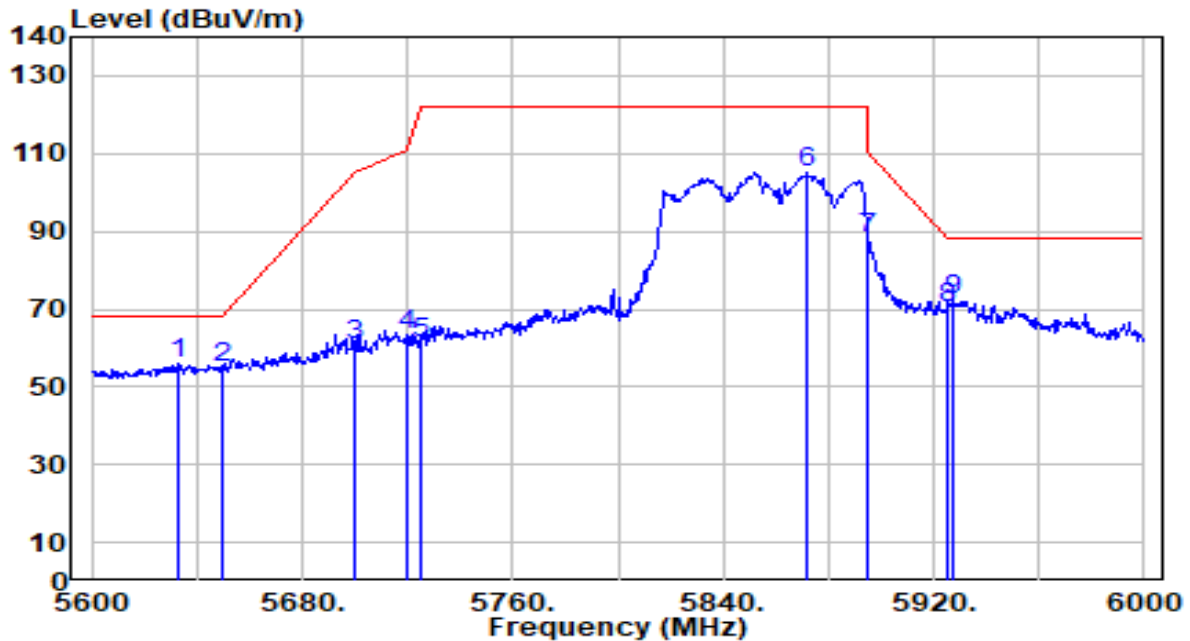


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5632.800	53.31	2.77	56.07	-12.13	68.20	100	334	Peak
2		5650.000	52.21	2.86	55.06	-13.14	68.20	100	334	Peak
3		5700.000	57.54	3.12	60.66	-44.54	105.20	100	334	Peak
4		5720.000	59.98	3.23	63.21	-47.59	110.80	100	334	Peak
5		5725.000	58.10	3.25	61.36	-60.84	122.20	100	334	Peak
6		5872.000	101.41	3.61	105.02	N/A	N/A	100	334	Peak
7		5895.000	84.48	3.60	88.08	-22.12	110.20	100	334	Peak
8		5925.000	66.82	3.59	70.41	-17.79	88.20	100	334	Peak
9		5927.600	68.67	3.59	72.26	-15.94	88.20	100	334	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-02
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-160MHz_TX_5.9G Band_CH 163_ANT 6+7	Test Voltage	By Notebook PC

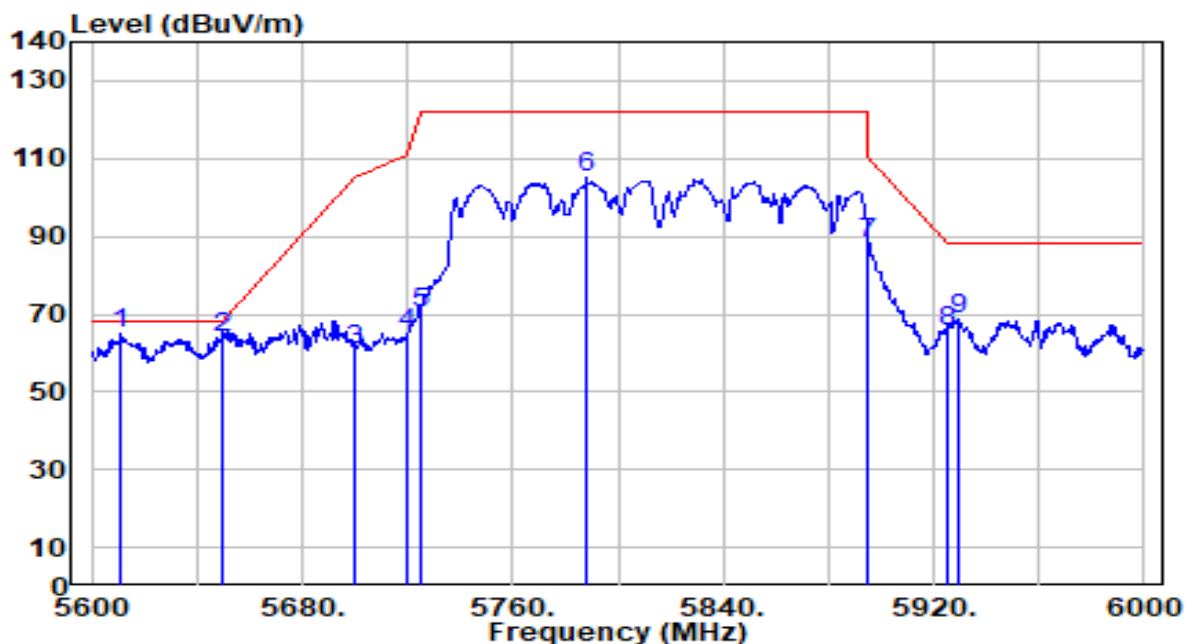


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5610.800	62.57	2.65	65.22	-2.98	68.20	217	339	Peak
2		5650.000	60.88	2.86	63.73	-4.47	68.20	217	339	Peak
3		5700.000	57.56	3.12	60.68	-44.52	105.20	217	339	Peak
4		5720.000	61.51	3.23	64.73	-46.07	110.80	217	339	Peak
5		5725.000	67.16	3.25	70.41	-51.79	122.20	217	339	Peak
6		5788.000	101.32	3.60	104.91	N/A	N/A	217	339	Peak
7		5895.000	84.78	3.60	88.38	-21.82	110.20	217	339	Peak
8		5925.000	61.91	3.59	65.50	-22.70	88.20	217	339	Peak
9		5929.600	65.09	3.59	68.68	-19.52	88.20	217	339	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-02
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ac-160MHz_TX_5.9G Band_CH 163_ANT 6+7	Test Voltage	By Notebook PC

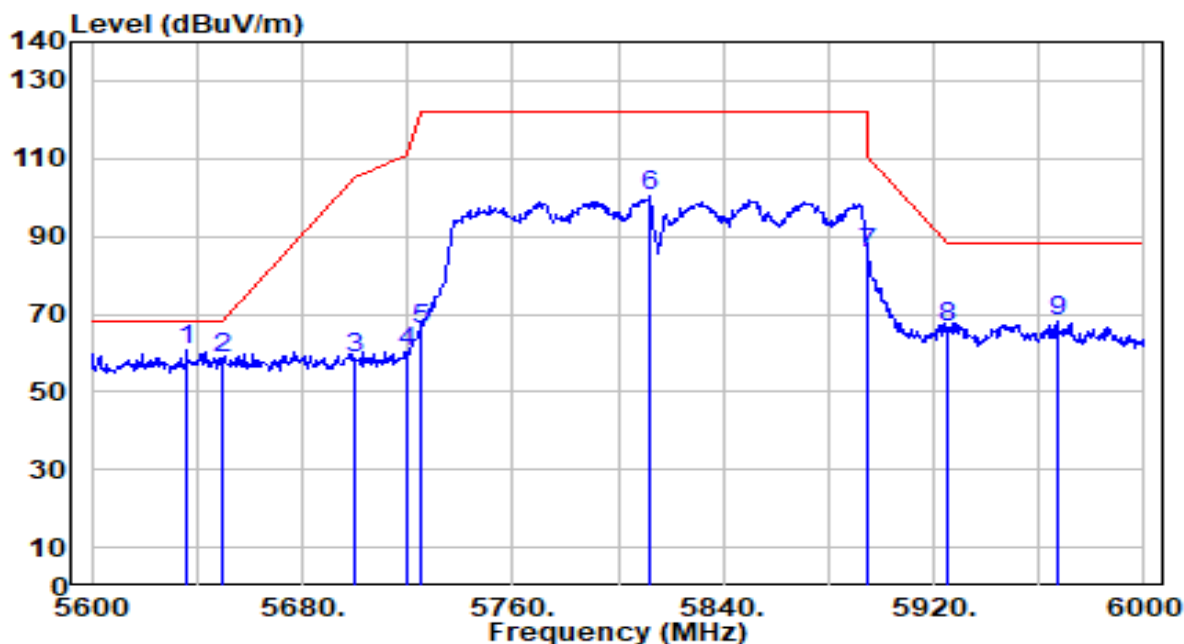


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5636.000	57.90	2.78	60.68	-7.52	68.20	100	340	Peak
2		5650.000	55.76	2.86	58.62	-9.58	68.20	100	340	Peak
3		5700.000	55.45	3.12	58.56	-46.64	105.20	100	340	Peak
4		5720.000	56.96	3.23	60.19	-50.61	110.80	100	340	Peak
5		5725.000	62.64	3.25	65.89	-56.31	122.20	100	340	Peak
6		5812.000	96.60	3.65	100.25	N/A	N/A	100	340	Peak
7		5895.000	82.01	3.60	85.61	-24.59	110.20	100	340	Peak
8		5925.000	62.98	3.59	66.57	-21.63	88.20	100	340	Peak
9		5967.200	64.64	3.59	68.22	-19.98	88.20	100	340	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-02
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_5.9G Band_CH 169_ANT 6+7	Test Voltage	By Notebook PC

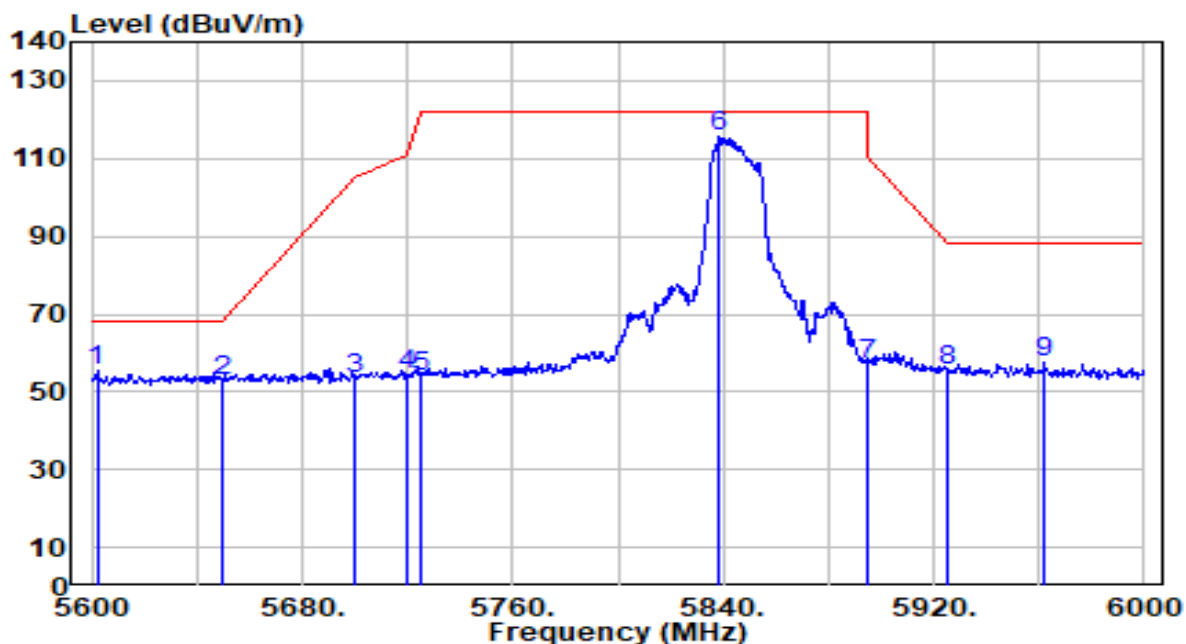


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5602.000	52.64	2.60	55.24	-12.96	68.20	218	0	Peak
2		5650.000	49.77	2.86	52.63	-15.57	68.20	218	0	Peak
3		5700.000	50.34	3.12	53.46	-51.74	105.20	218	0	Peak
4		5720.000	51.10	3.23	54.33	-56.47	110.80	218	0	Peak
5		5725.000	50.49	3.25	53.74	-68.46	122.20	218	0	Peak
6		5838.400	112.12	3.64	115.76	N/A	N/A	218	0	Peak
7		5895.000	53.56	3.60	57.16	-53.04	110.20	218	0	Peak
8		5925.000	51.96	3.59	55.55	-32.65	88.20	218	0	Peak
9		5962.000	53.75	3.59	57.33	-30.87	88.20	218	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-02
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_5.9G Band_CH 169_ANT 6+7	Test Voltage	By Notebook PC

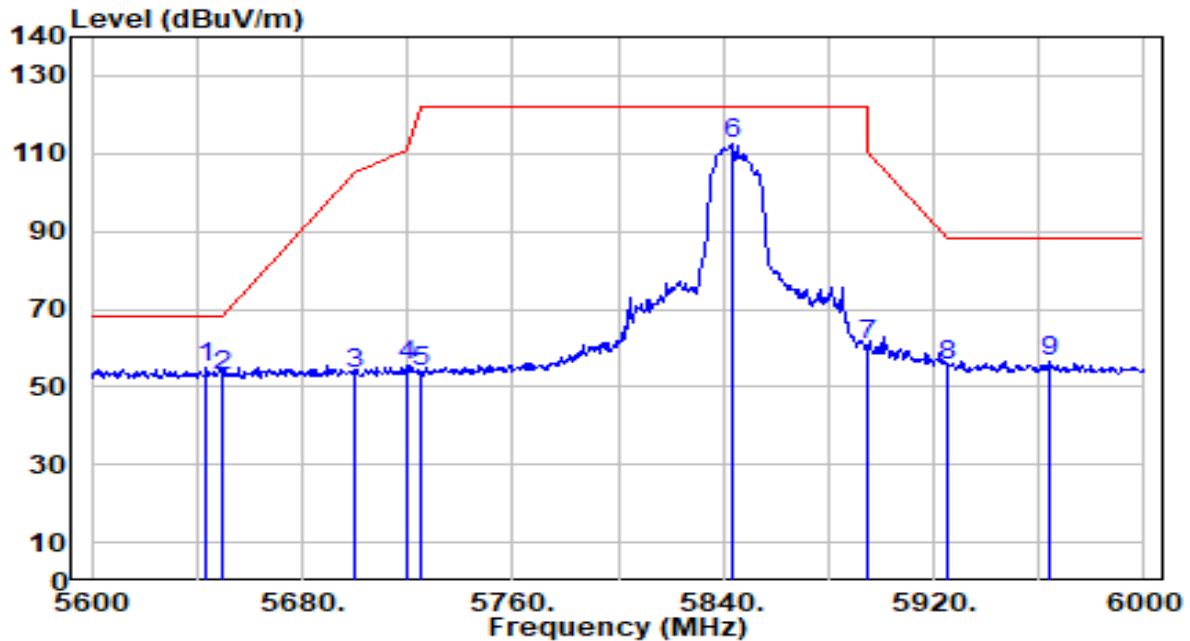


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5643.600	51.90	2.82	54.72	-13.48	68.20	104	333	Peak
2		5650.000	50.07	2.86	52.92	-15.28	68.20	104	333	Peak
3		5700.000	50.41	3.12	53.53	-51.67	105.20	104	333	Peak
4		5720.000	52.15	3.23	55.38	-55.42	110.80	104	333	Peak
5		5725.000	50.88	3.25	54.13	-68.07	122.20	104	333	Peak
6		5843.200	108.79	3.63	112.42	N/A	N/A	104	333	Peak
7		5895.000	57.28	3.60	60.88	-49.32	110.20	104	333	Peak
8		5925.000	52.08	3.59	55.67	-32.53	88.20	104	333	Peak
9		5964.400	52.98	3.59	56.56	-31.64	88.20	104	333	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-02
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_5.9G Band_CH 173_ANT 6+7	Test Voltage	By Notebook PC

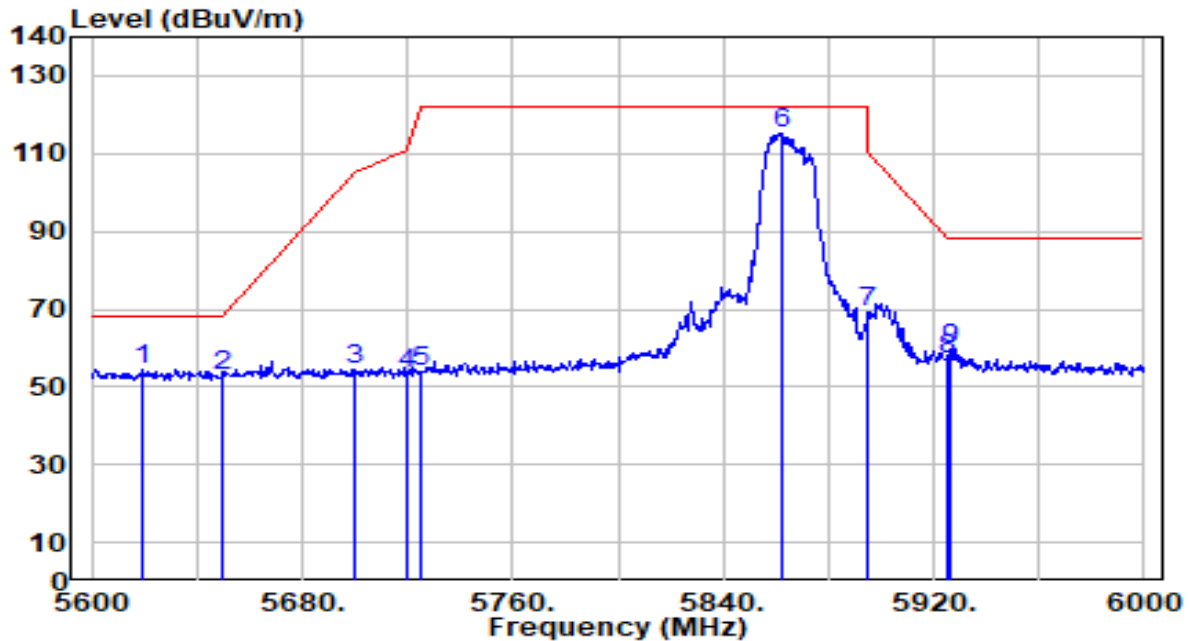


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5619.600	51.88	2.70	54.58	-13.62	68.20	211	0	Peak
2		5650.000	50.12	2.86	52.97	-15.23	68.20	211	0	Peak
3		5700.000	51.09	3.12	54.20	-51.00	105.20	211	0	Peak
4		5720.000	50.08	3.23	53.31	-57.49	110.80	211	0	Peak
5		5725.000	50.66	3.25	53.92	-68.28	122.20	211	0	Peak
6		5862.800	111.80	3.62	115.42	N/A	N/A	211	0	Peak
7		5895.000	65.73	3.60	69.33	-40.87	110.20	211	0	Peak
8		5925.000	53.63	3.59	57.23	-30.97	88.20	211	0	Peak
9		5926.400	55.95	3.59	59.55	-28.65	88.20	211	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-02
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_5.9G Band_CH 173_ANT 6+7	Test Voltage	By Notebook PC

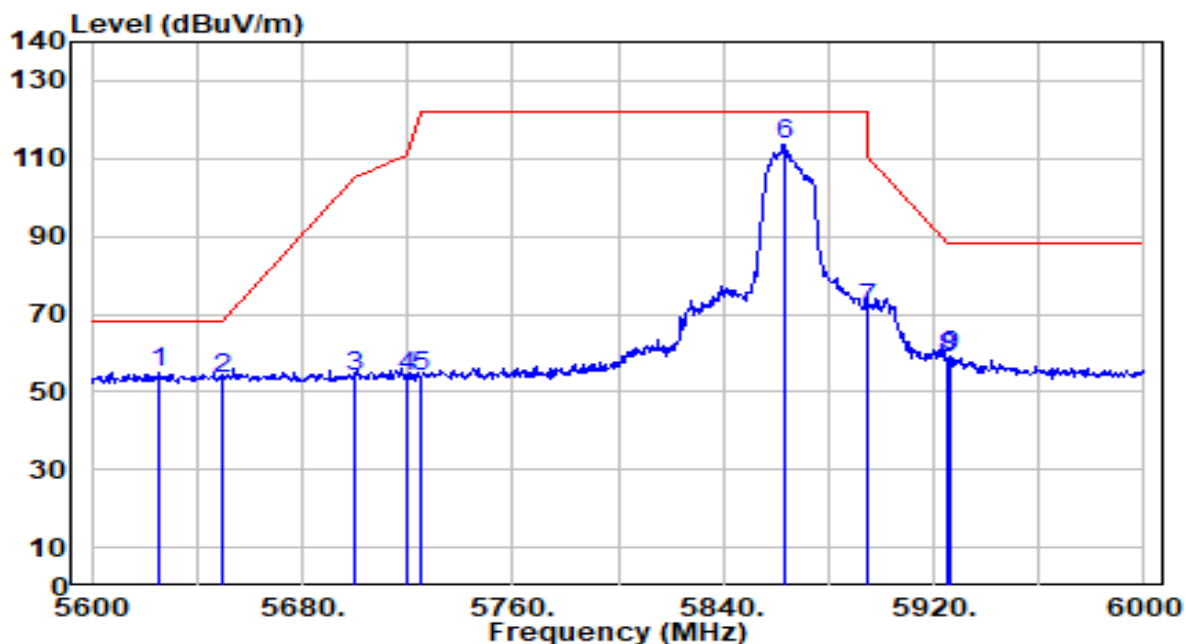


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5626.000	52.37	2.73	55.10	-13.10	68.20	117	334	Peak
2		5650.000	50.58	2.86	53.44	-14.76	68.20	117	334	Peak
3		5700.000	50.83	3.12	53.95	-51.25	105.20	117	334	Peak
4		5720.000	50.73	3.23	53.96	-56.84	110.80	117	334	Peak
5		5725.000	50.86	3.25	54.12	-68.08	122.20	117	334	Peak
6		5863.600	109.80	3.62	113.42	N/A	N/A	117	334	Peak
7		5895.000	67.53	3.60	71.12	-39.08	110.20	117	334	Peak
8		5925.000	54.81	3.59	58.40	-29.80	88.20	117	334	Peak
9		5926.400	55.72	3.59	59.31	-28.89	88.20	117	334	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-02
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_5.9G Band_CH 177_ANT 6+7	Test Voltage	By Notebook PC

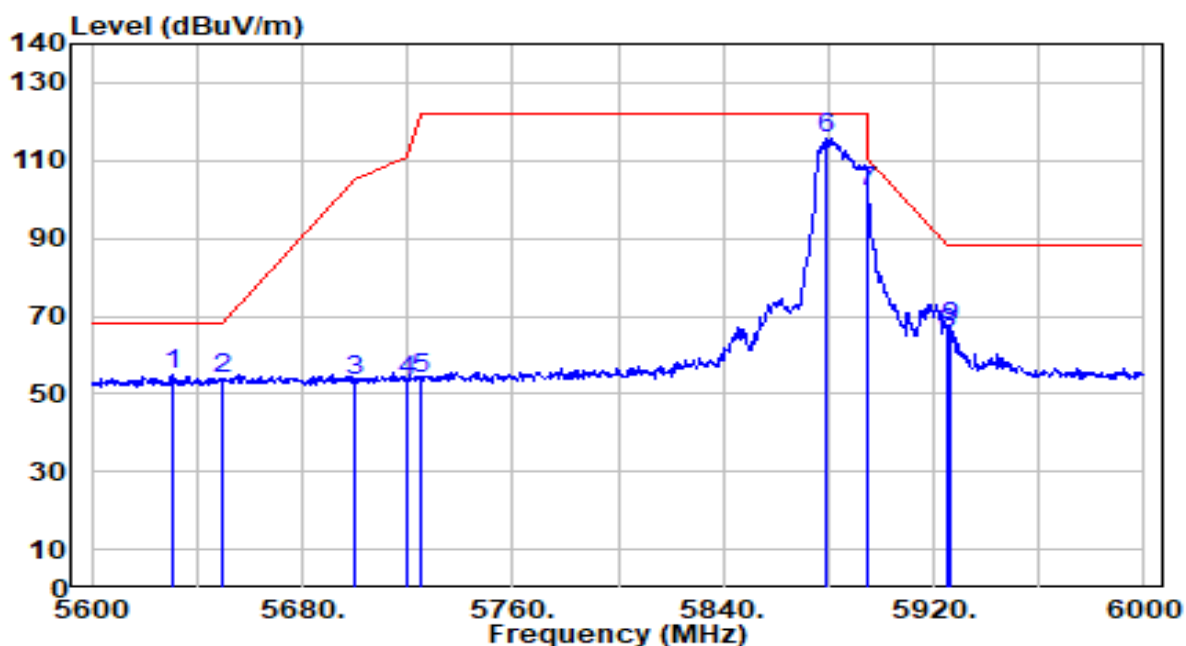


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5630.400	52.09	2.75	54.84	-13.36	68.20	202	0	Peak
2	5650.000	51.11	2.86	53.97	-14.23	68.20	202	0	Peak
3	5700.000	50.29	3.12	53.41	-51.79	105.20	202	0	Peak
4	5720.000	50.20	3.23	53.43	-57.37	110.80	202	0	Peak
5	5725.000	50.47	3.25	53.72	-68.48	122.20	202	0	Peak
6	5878.800	111.92	3.61	115.53	N/A	N/A	202	0	Peak
7	* 5895.000	98.47	3.60	102.07	-8.13	110.20	202	0	Peak
8	5925.000	61.92	3.59	65.52	-22.68	88.20	202	0	Peak
9	5926.400	63.29	3.59	66.88	-21.32	88.20	202	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-02
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_5.9G Band_CH 177_ANT 6+7	Test Voltage	By Notebook PC

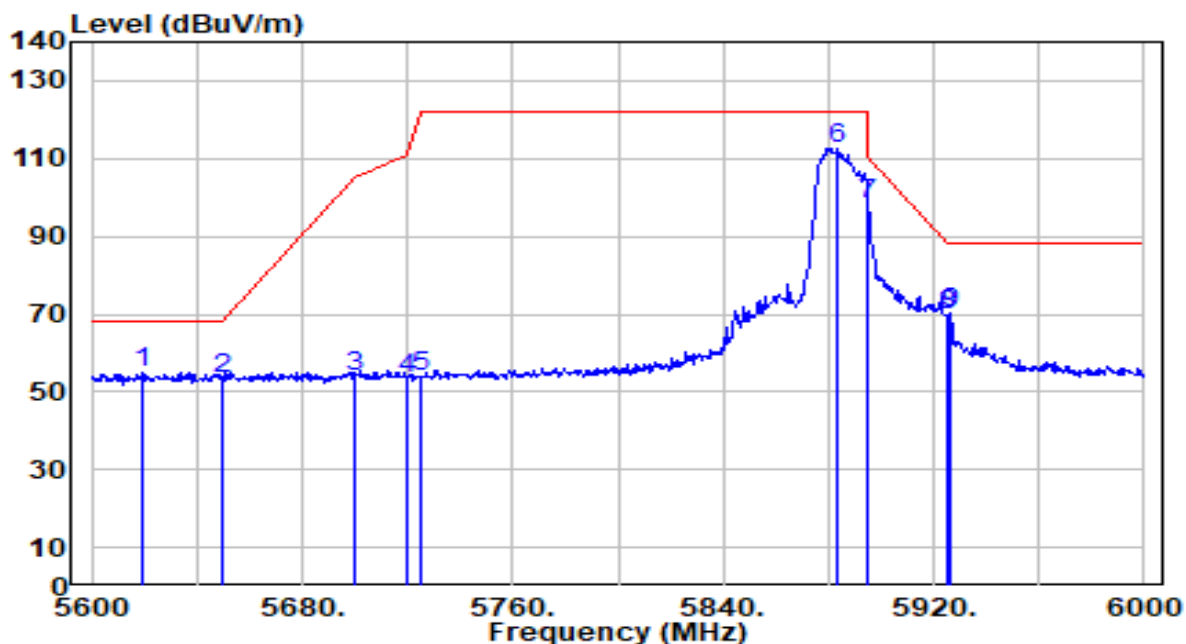


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5619.200	52.47	2.69	55.16	-13.04	68.20	103	333	Peak
2	5650.000	50.39	2.86	53.25	-14.95	68.20	103	333	Peak
3	5700.000	50.65	3.12	53.77	-51.43	105.20	103	333	Peak
4	5720.000	49.99	3.23	53.21	-57.59	110.80	103	333	Peak
5	5725.000	50.53	3.25	53.78	-68.42	122.20	103	333	Peak
6	5883.600	108.96	3.61	112.57	N/A	N/A	103	333	Peak
7	* 5895.000	94.46	3.60	98.06	-12.14	110.20	103	333	Peak
8	5925.000	66.15	3.59	69.74	-18.46	88.20	103	333	Peak
9	5926.400	66.53	3.59	70.12	-18.08	88.20	103	333	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-02
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-40MHz_TX_5.9G Band_CH 167_ANT 6+7	Test Voltage	By Notebook PC

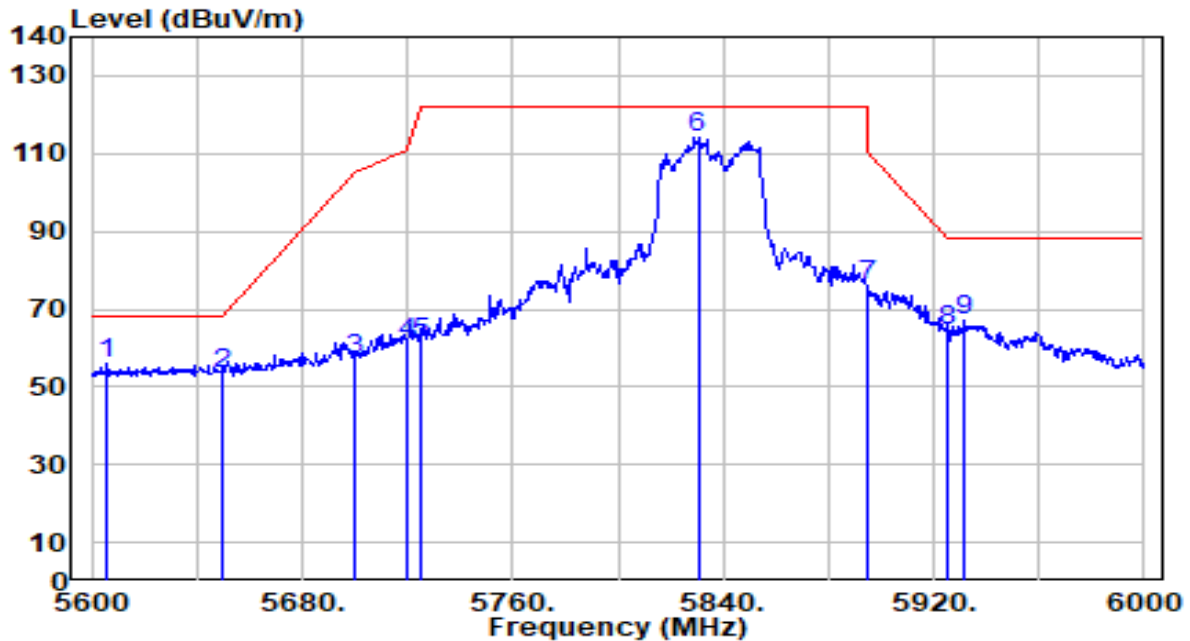


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5606.000	53.19	2.63	55.82	-12.38	68.20	222	360	Peak
2		5650.000	50.72	2.86	53.57	-14.63	68.20	222	360	Peak
3		5700.000	54.09	3.12	57.21	-47.99	105.20	222	360	Peak
4		5720.000	58.21	3.23	61.44	-49.36	110.80	222	360	Peak
5		5725.000	57.86	3.25	61.11	-61.09	122.20	222	360	Peak
6		5830.400	110.32	3.64	113.97	N/A	N/A	222	360	Peak
7		5895.000	72.41	3.60	76.01	-34.19	110.20	222	360	Peak
8		5925.000	61.04	3.59	64.63	-23.57	88.20	222	360	Peak
9		5931.600	63.47	3.59	67.06	-21.14	88.20	222	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-02
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-40MHz_TX_5.9G Band_CH 167_ANT 6+7	Test Voltage	By Notebook PC

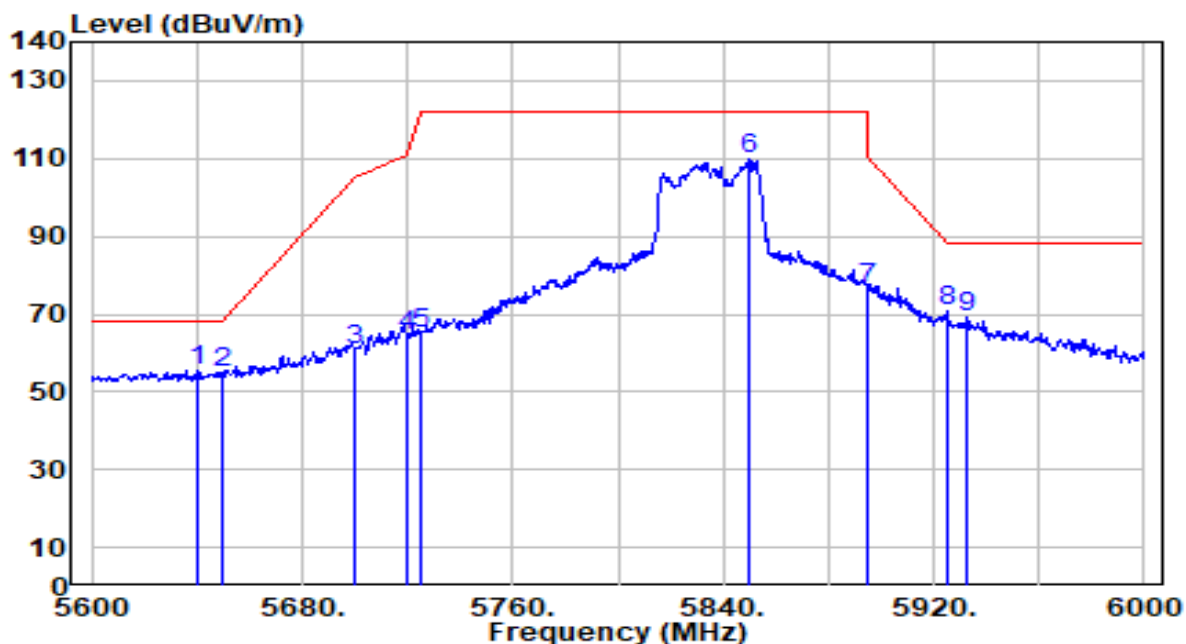


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5640.000	52.62	2.80	55.42	-12.78	68.20	100	336	Peak
2		5650.000	51.89	2.86	54.75	-13.45	68.20	100	336	Peak
3		5700.000	57.52	3.12	60.64	-44.56	105.20	100	336	Peak
4		5720.000	61.29	3.23	64.52	-46.28	110.80	100	336	Peak
5		5725.000	61.69	3.25	64.94	-57.26	122.20	100	336	Peak
6		5850.000	106.01	3.63	109.63	N/A	N/A	100	336	Peak
7		5895.000	72.89	3.60	76.49	-33.71	110.20	100	336	Peak
8		5925.000	67.30	3.59	70.89	-17.31	88.20	100	336	Peak
9		5932.800	65.41	3.59	69.00	-19.20	88.20	100	336	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-02
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-40MHz_TX_5.9G Band_CH 175_ANT 6+7	Test Voltage	By Notebook PC

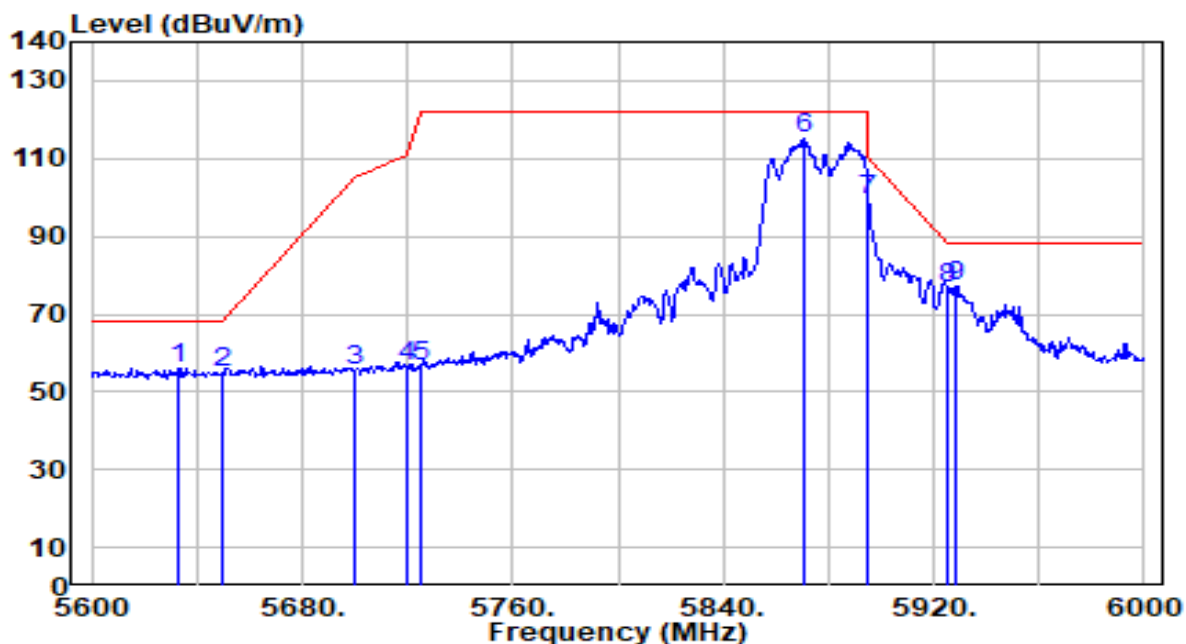


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5633.200	53.19	2.77	55.95	-12.25	68.20	225	338	Peak
2	5650.000	51.84	2.86	54.69	-13.51	68.20	225	338	Peak
3	5700.000	52.22	3.12	55.34	-49.86	105.20	225	338	Peak
4	5720.000	53.04	3.23	56.27	-54.53	110.80	225	338	Peak
5	5725.000	53.02	3.25	56.28	-65.92	122.20	225	338	Peak
6	5871.200	111.47	3.62	115.08	N/A	N/A	225	338	Peak
7	* 5895.000	95.97	3.60	99.57	-10.63	110.20	225	338	Peak
8	5925.000	72.99	3.59	76.58	-11.62	88.20	225	338	Peak
9	5928.800	73.73	3.59	77.32	-10.88	88.20	225	338	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-02
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-40MHz_TX_5.9G Band_CH 175_ANT 6+7	Test Voltage	By Notebook PC

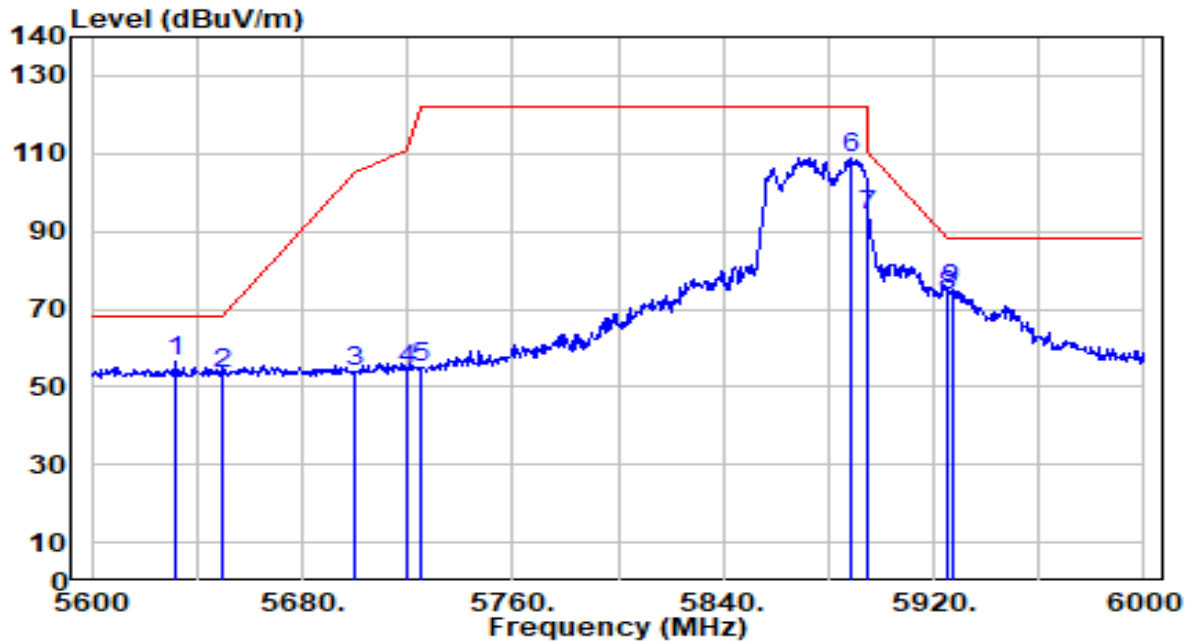


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5632.000	53.90	2.76	56.66	-11.54	68.20	122	336	Peak
2		5650.000	50.59	2.86	53.44	-14.76	68.20	122	336	Peak
3		5700.000	50.60	3.12	53.72	-51.48	105.20	122	336	Peak
4		5720.000	51.22	3.23	54.44	-56.36	110.80	122	336	Peak
5		5725.000	51.71	3.25	54.96	-67.24	122.20	122	336	Peak
6		5888.400	105.33	3.60	108.94	N/A	N/A	122	336	Peak
7		5895.000	90.63	3.60	94.23	-15.97	110.20	122	336	Peak
8		5925.000	70.06	3.59	73.65	-14.55	88.20	122	336	Peak
9		5926.800	71.29	3.59	74.88	-13.32	88.20	122	336	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report

EUT	Mobile Computer	Date of Test	2025-07-02
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-80MHz_TX_5.9G Band_CH 171_ANT 6+7	Test Voltage	By Notebook PC

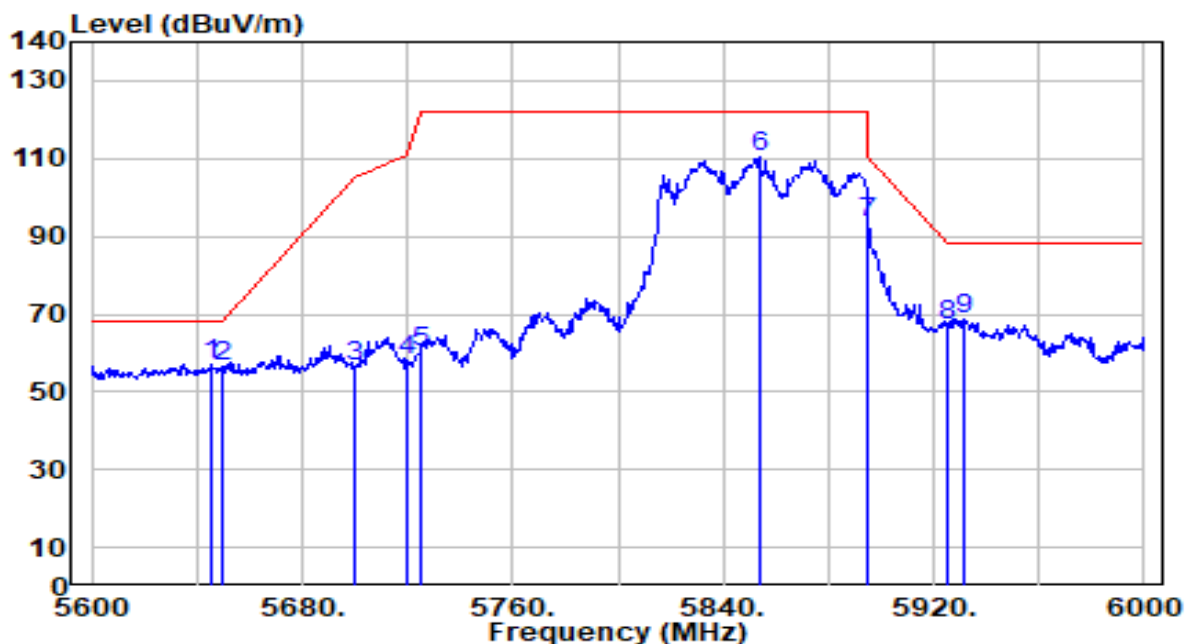


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5645.600	54.12	2.83	56.95	-11.25	68.20	250	0	Peak
2		5650.000	53.87	2.86	56.73	-11.47	68.20	250	0	Peak
3		5700.000	53.35	3.12	56.47	-48.73	105.20	250	0	Peak
4		5720.000	55.11	3.23	58.34	-52.46	110.80	250	0	Peak
5		5725.000	56.88	3.25	60.13	-62.07	122.20	250	0	Peak
6		5853.600	106.70	3.63	110.33	N/A	N/A	250	0	Peak
7		5895.000	89.91	3.60	93.51	-16.69	110.20	250	0	Peak
8		5925.000	63.27	3.59	66.87	-21.33	88.20	250	0	Peak
9		5931.200	65.26	3.59	68.85	-19.35	88.20	250	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-02
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-80MHz_TX_5.9G Band_CH 171_ANT 6+7	Test Voltage	By Notebook PC

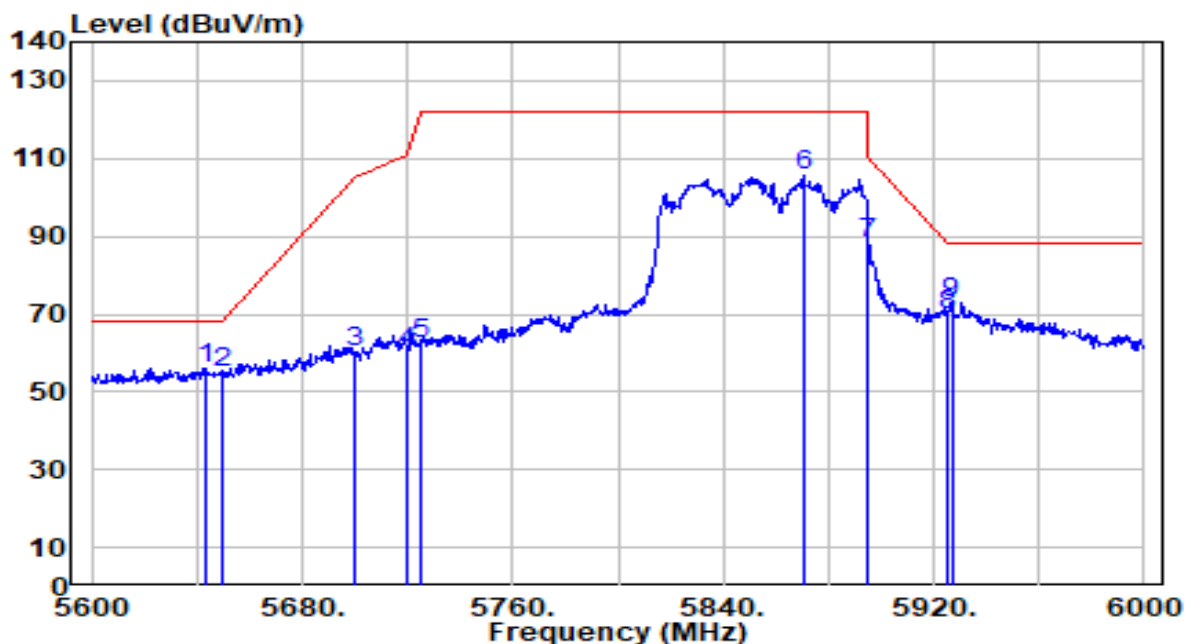


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5643.600	53.31	2.82	56.14	-12.06	68.20	102	336	Peak
2		5650.000	52.25	2.86	55.11	-13.09	68.20	102	336	Peak
3		5700.000	56.94	3.12	60.06	-45.14	105.20	102	336	Peak
4		5720.000	57.22	3.23	60.44	-50.36	110.80	102	336	Peak
5		5725.000	59.29	3.25	62.55	-59.65	122.20	102	336	Peak
6		5870.800	102.09	3.62	105.70	N/A	N/A	102	336	Peak
7		5895.000	84.57	3.60	88.17	-22.03	110.20	102	336	Peak
8		5925.000	66.40	3.59	70.00	-18.20	88.20	102	336	Peak
9		5926.800	69.56	3.59	73.15	-15.05	88.20	102	336	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-02
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_TX_5.9G Band_CH 163_ANT 6+7	Test Voltage	By Notebook PC

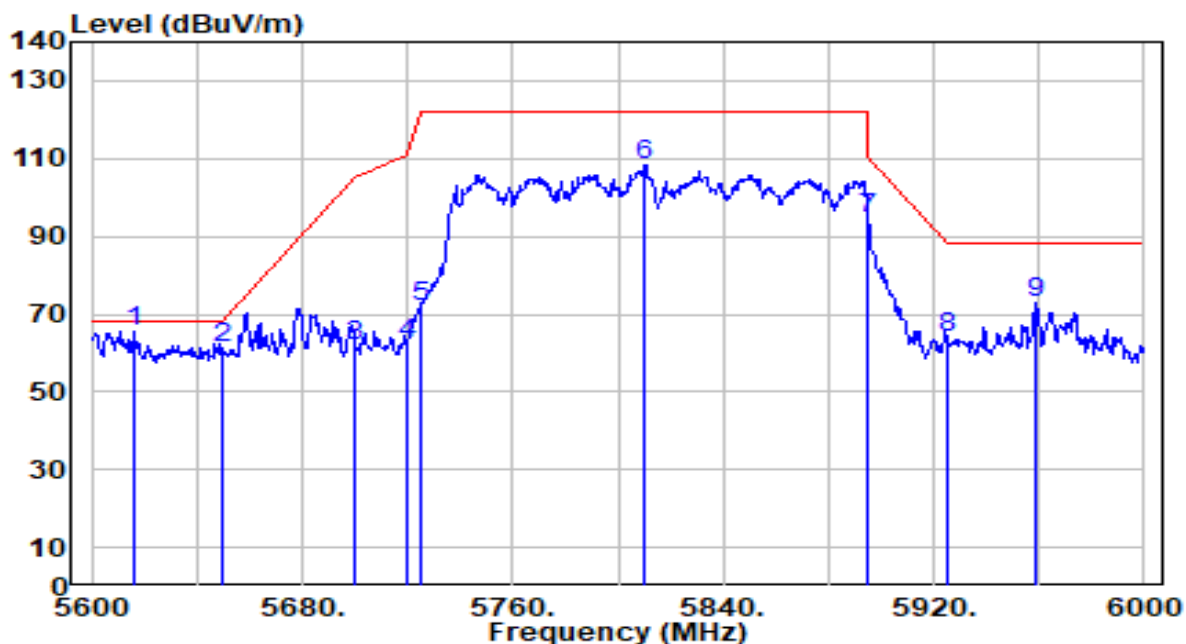


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5616.000	62.95	2.68	65.63	-2.57	68.20	214	0	Peak
2		5650.000	58.68	2.86	61.54	-6.66	68.20	214	0	Peak
3		5700.000	58.62	3.12	61.74	-43.46	105.20	214	0	Peak
4		5720.000	59.08	3.23	62.31	-48.49	110.80	214	0	Peak
5		5725.000	68.86	3.25	72.11	-50.09	122.20	214	0	Peak
6		5810.400	104.53	3.66	108.19	N/A	N/A	214	0	Peak
7		5895.000	91.11	3.60	94.71	-15.49	110.20	214	0	Peak
8		5925.000	60.43	3.59	64.02	-24.18	88.20	214	0	Peak
9		5958.800	69.29	3.59	72.88	-15.32	88.20	214	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-02
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_TX_5.9G Band_CH 163_ANT 6+7	Test Voltage	By Notebook PC

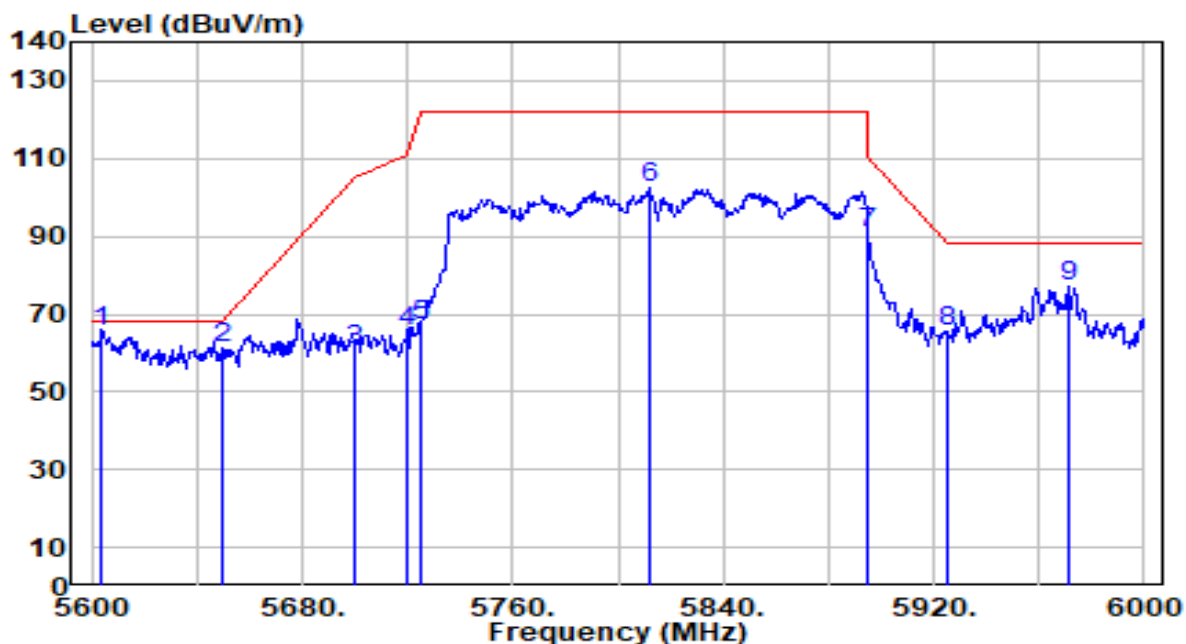


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5604.000	63.12	2.61	65.74	-2.46	68.20	117	333	Peak
2		5650.000	58.20	2.86	61.06	-7.14	68.20	117	333	Peak
3		5700.000	57.70	3.12	60.82	-44.38	105.20	117	333	Peak
4		5720.000	62.47	3.23	65.69	-45.11	110.80	117	333	Peak
5		5725.000	63.68	3.25	66.93	-55.27	122.20	117	333	Peak
6		5811.600	98.58	3.65	102.24	N/A	N/A	117	333	Peak
7		5895.000	87.42	3.60	91.02	-19.18	110.20	117	333	Peak
8		5925.000	61.75	3.59	65.34	-22.86	88.20	117	333	Peak
9		5971.600	73.44	3.58	77.02	-11.18	88.20	117	333	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-22
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_5.9G Band_26Tone_RU0_CH 169_ANT 6+7	Test Voltage	By Notebook PC

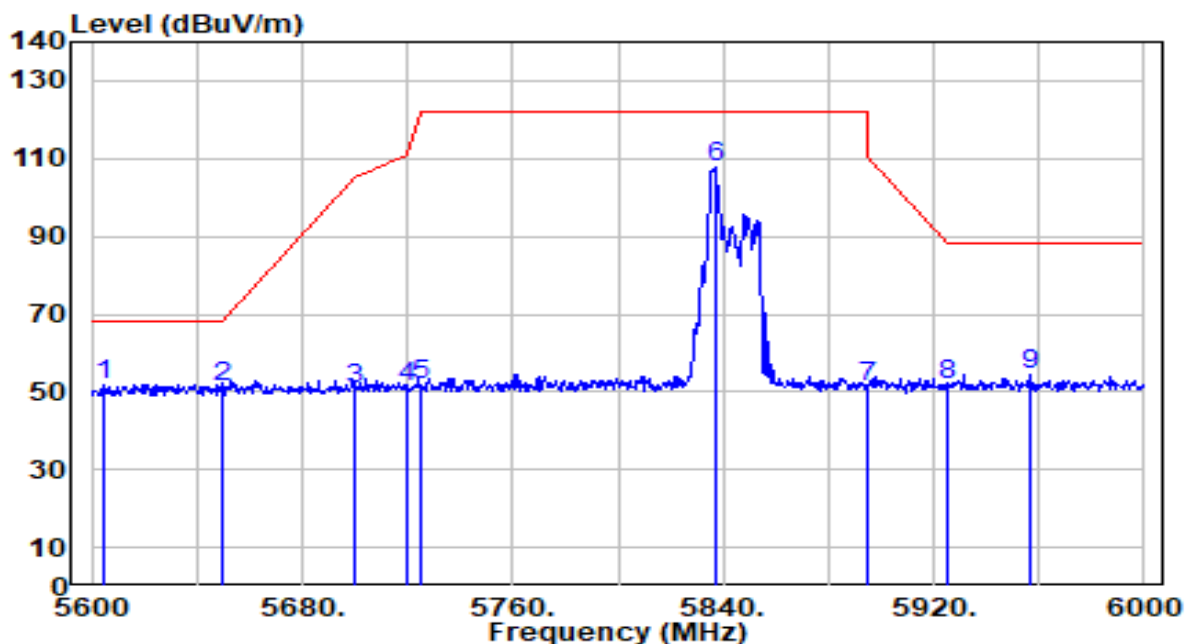


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5604.400	49.41	2.62	52.03	-16.17	68.20	187	360	Peak
2		5650.000	48.59	2.86	51.45	-16.75	68.20	187	360	Peak
3		5700.000	47.66	3.12	50.77	-54.43	105.20	187	360	Peak
4		5720.000	47.93	3.23	51.16	-59.64	110.80	187	360	Peak
5		5725.000	48.72	3.25	51.97	-70.23	122.20	187	360	Peak
6		5836.800	104.00	3.64	107.64	N/A	N/A	187	360	Peak
7		5895.000	47.52	3.60	51.12	-59.08	110.20	187	360	Peak
8		5925.000	48.26	3.59	51.85	-36.35	88.20	187	360	Peak
9		5956.400	50.88	3.59	54.47	-33.73	88.20	187	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-22
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_5.9G Band_26Tone_RU0_CH 169_ANT 6+7	Test Voltage	By Notebook PC

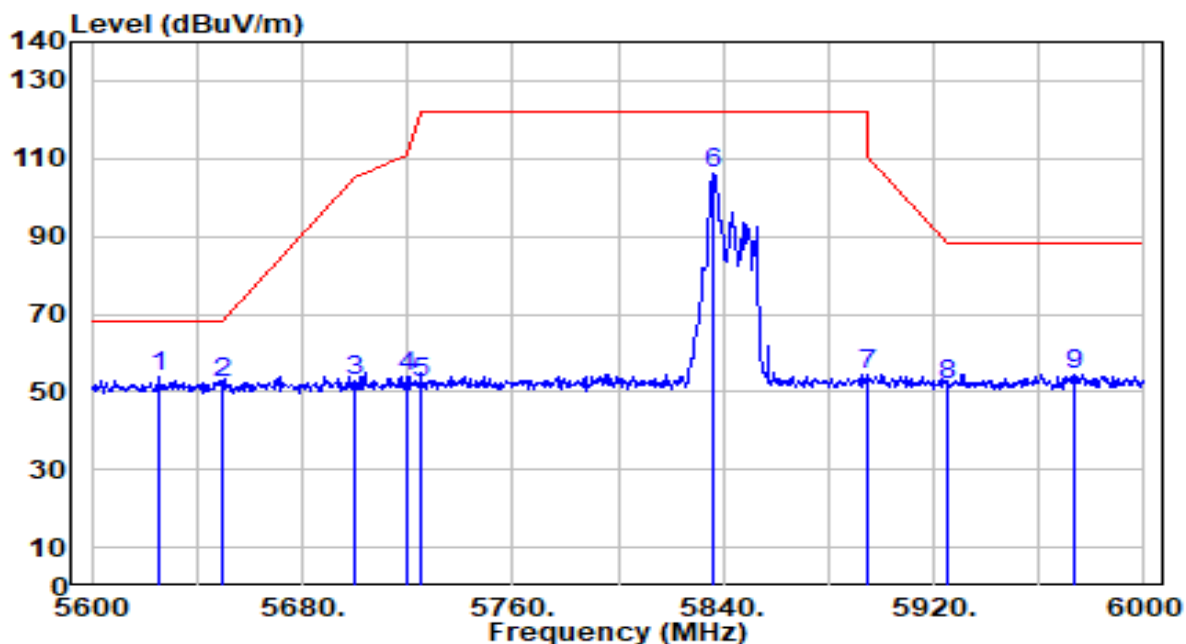


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5626.000	51.01	2.73	53.74	-14.46	68.20	100	84	Peak
2		5650.000	49.40	2.86	52.26	-15.94	68.20	100	84	Peak
3		5700.000	49.47	3.12	52.59	-52.61	105.20	100	84	Peak
4		5720.000	50.61	3.23	53.84	-56.96	110.80	100	84	Peak
5		5725.000	49.01	3.25	52.26	-69.94	122.20	100	84	Peak
6		5836.400	102.76	3.64	106.40	N/A	N/A	100	84	Peak
7		5895.000	50.59	3.60	54.19	-56.01	110.20	100	84	Peak
8		5925.000	48.29	3.59	51.89	-36.31	88.20	100	84	Peak
9		5973.600	50.99	3.58	54.57	-33.63	88.20	100	84	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-22
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_5.9G Band_26Tone_RU8_CH 177_ANT 6+7	Test Voltage	By Notebook PC

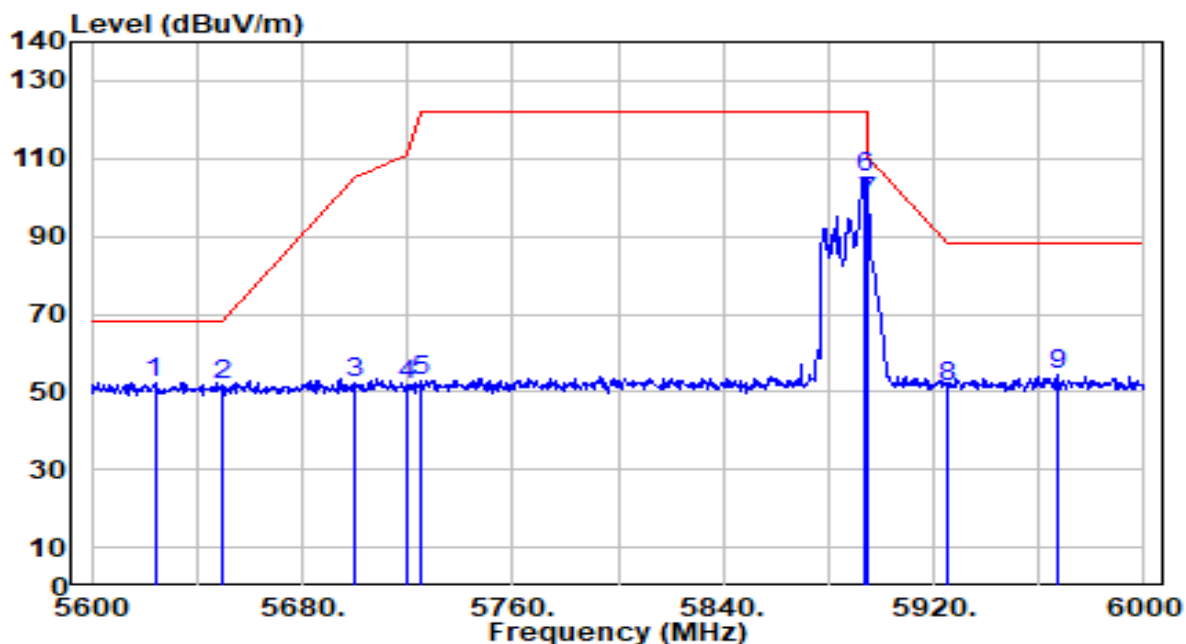


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5624.000	49.79	2.72	52.51	-15.69	68.20	176	336	Peak
2	5650.000	48.66	2.86	51.52	-16.68	68.20	176	336	Peak
3	5700.000	49.24	3.12	52.35	-52.85	105.20	176	336	Peak
4	5720.000	48.38	3.23	51.61	-59.19	110.80	176	336	Peak
5	5725.000	49.37	3.25	52.63	-69.57	122.20	176	336	Peak
6	5893.600	101.48	3.60	105.08	N/A	N/A	176	336	Peak
7	* 5895.000	95.13	3.60	98.73	-11.47	110.20	176	336	Peak
8	5925.000	47.56	3.59	51.15	-37.05	88.20	176	336	Peak
9	5966.800	50.59	3.59	54.17	-34.03	88.20	176	336	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-22
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_5.9G Band_26Tone_RU8_CH 177_ANT 6+7	Test Voltage	By Notebook PC

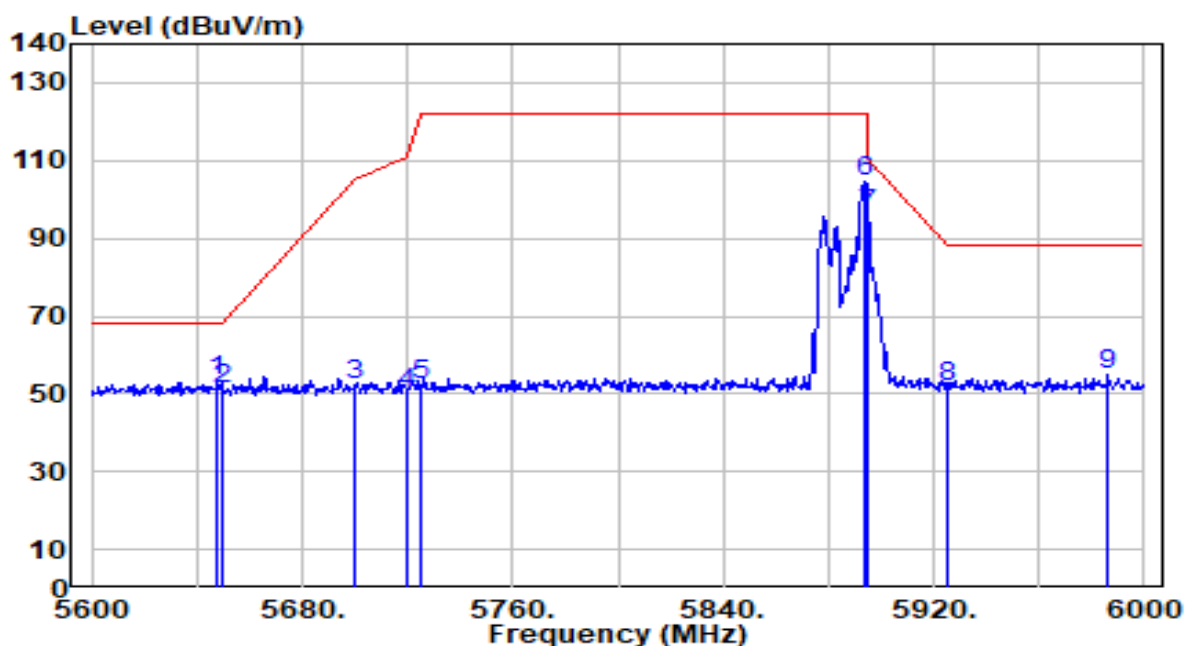


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5648.000	50.33	2.85	53.17	-15.03	68.20	100	85	Peak
2	5650.000	48.16	2.86	51.02	-17.18	68.20	100	85	Peak
3	5700.000	49.06	3.12	52.18	-53.02	105.20	100	85	Peak
4	5720.000	46.85	3.23	50.08	-60.72	110.80	100	85	Peak
5	5725.000	49.30	3.25	52.56	-69.64	122.20	100	85	Peak
6	5894.000	100.94	3.60	104.54	N/A	N/A	100	85	Peak
7	* 5895.000	92.43	3.60	96.03	-14.17	110.20	100	85	Peak
8	5925.000	47.94	3.59	51.53	-36.67	88.20	100	85	Peak
9	5986.400	51.26	3.58	54.84	-33.36	88.20	100	85	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-22
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_5.9G Band_52Tone_RU74_CH 169_ANT 6+7	Test Voltage	By Notebook PC

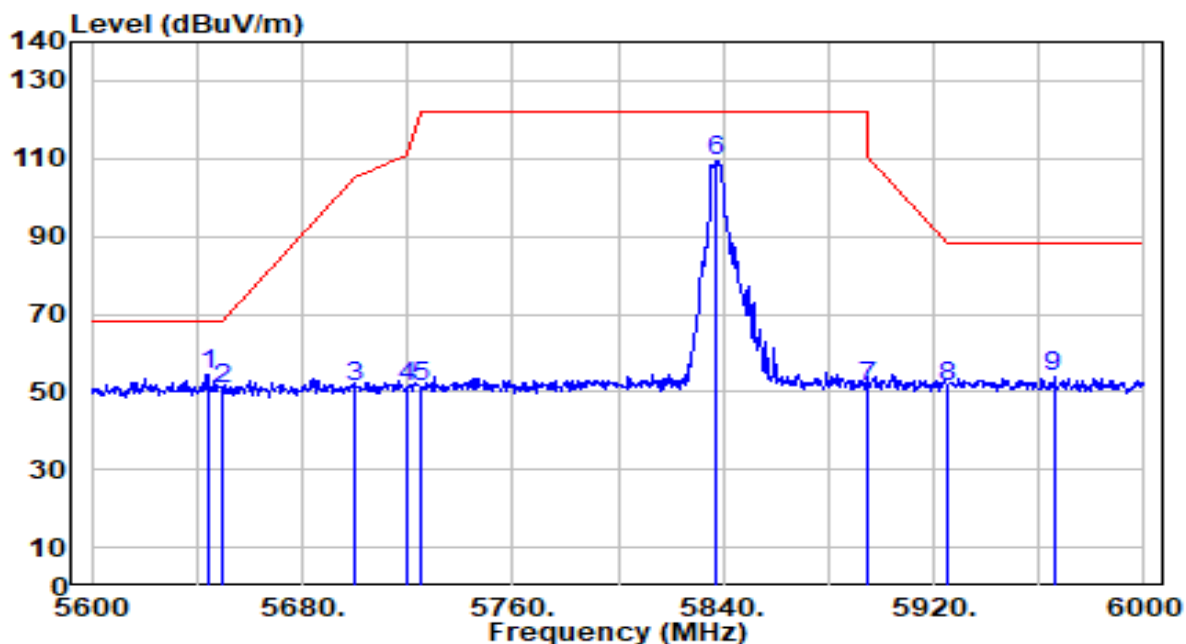


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5644.000	51.57	2.82	54.40	-13.80	68.20	187	360	Peak
2		5650.000	47.75	2.86	50.61	-17.59	68.20	187	360	Peak
3		5700.000	48.15	3.12	51.26	-53.94	105.20	187	360	Peak
4		5720.000	48.10	3.23	51.33	-59.47	110.80	187	360	Peak
5		5725.000	47.84	3.25	51.10	-71.10	122.20	187	360	Peak
6		5837.600	105.94	3.64	109.57	N/A	N/A	187	360	Peak
7		5895.000	47.81	3.60	51.40	-58.80	110.20	187	360	Peak
8		5925.000	47.54	3.59	51.13	-37.07	88.20	187	360	Peak
9		5965.600	50.11	3.59	53.69	-34.51	88.20	187	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-22
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_5.9G Band_52Tone_RU74_CH 169_ANT 6+7	Test Voltage	By Notebook PC

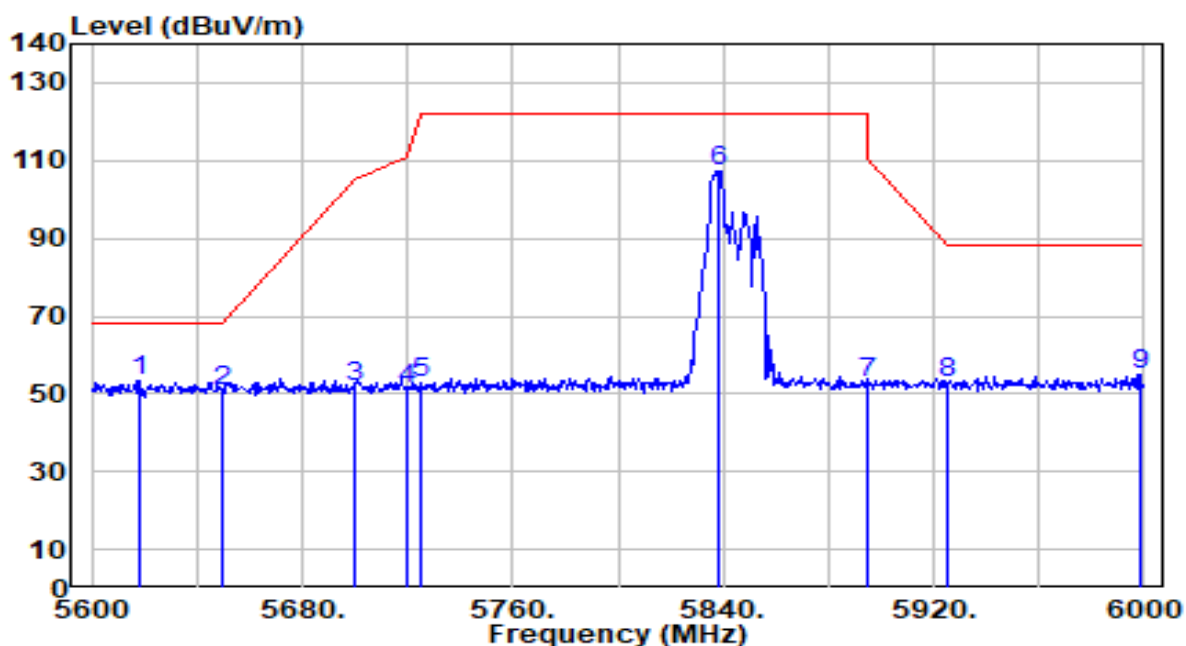


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5618.000	50.68	2.69	53.37	-14.83	68.20	100	84	Peak
2		5650.000	47.99	2.86	50.84	-17.36	68.20	100	84	Peak
3		5700.000	48.54	3.12	51.66	-53.54	105.20	100	84	Peak
4		5720.000	47.99	3.23	51.22	-59.58	110.80	100	84	Peak
5		5725.000	49.34	3.25	52.59	-69.61	122.20	100	84	Peak
6		5838.400	103.68	3.64	107.32	N/A	N/A	100	84	Peak
7		5895.000	48.99	3.60	52.59	-57.61	110.20	100	84	Peak
8		5925.000	49.05	3.59	52.64	-35.56	88.20	100	84	Peak
9		5998.400	51.42	3.58	55.00	-33.20	88.20	100	84	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-22
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_5.9G Band_52Tone_RU77_CH 177_ANT 6+7	Test Voltage	By Notebook PC

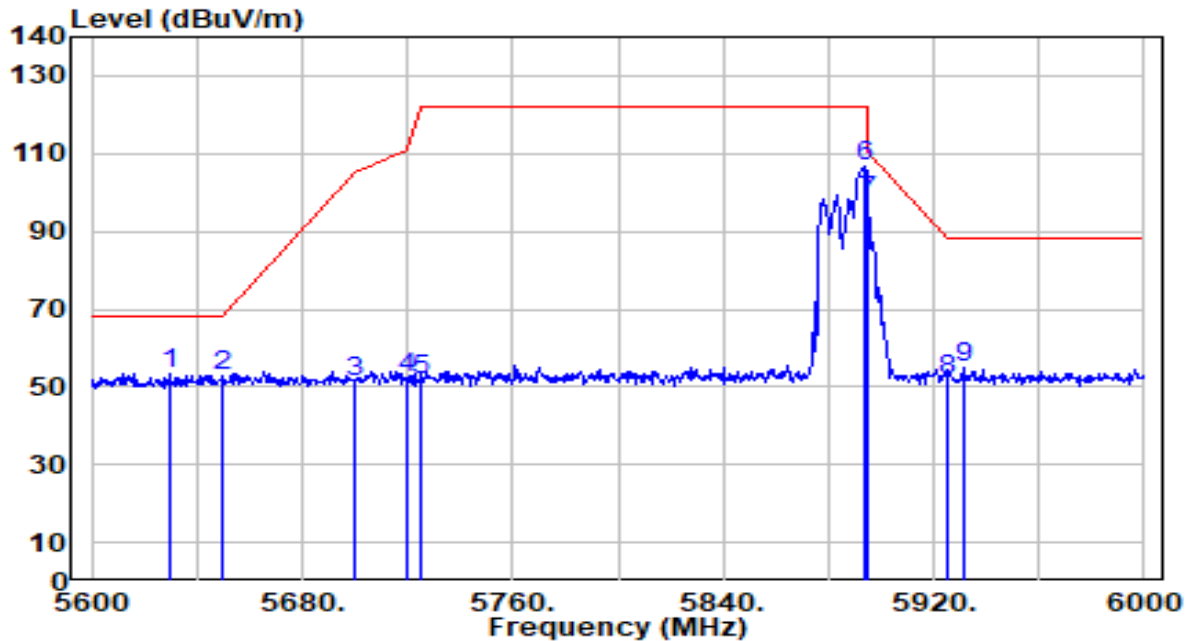


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5629.600	50.69	2.75	53.44	-14.76	68.20	176	336	Peak
2	5650.000	49.82	2.86	52.68	-15.52	68.20	176	336	Peak
3	5700.000	48.04	3.12	51.16	-54.04	105.20	176	336	Peak
4	5720.000	49.32	3.23	52.55	-58.25	110.80	176	336	Peak
5	5725.000	48.63	3.25	51.88	-70.32	122.20	176	336	Peak
6	5894.000	103.27	3.60	106.87	N/A	N/A	176	336	Peak
7	* 5895.000	93.99	3.60	97.59	-12.61	110.20	176	336	Peak
8	5925.000	48.06	3.59	51.65	-36.55	88.20	176	336	Peak
9	5931.200	51.13	3.59	54.72	-33.48	88.20	176	336	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-22
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_5.9G Band_52Tone_RU77_CH 177_ANT 6+7	Test Voltage	By Notebook PC

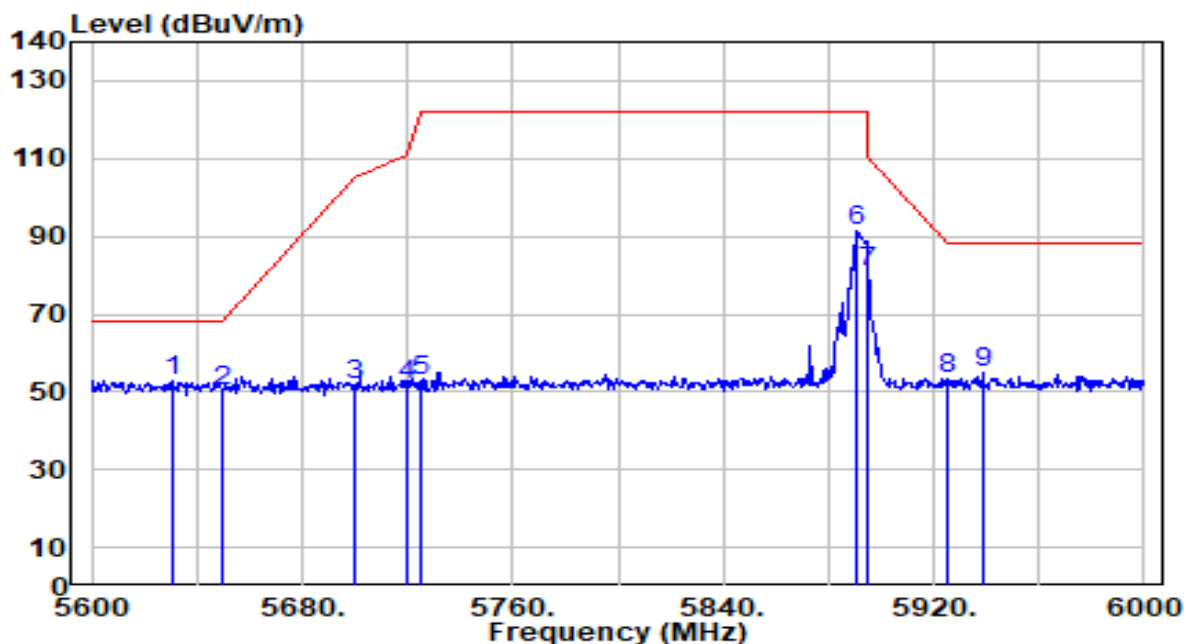


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5630.400	50.02	2.75	52.78	-15.42	68.20	100	197	Peak
2		5650.000	47.24	2.86	50.10	-18.10	68.20	100	197	Peak
3		5700.000	48.71	3.12	51.83	-53.37	105.20	100	197	Peak
4		5720.000	48.63	3.23	51.86	-58.94	110.80	100	197	Peak
5		5725.000	49.68	3.25	52.93	-69.27	122.20	100	197	Peak
6		5890.400	87.55	3.60	91.15	N/A	N/A	100	197	Peak
7		5895.000	76.98	3.60	80.58	-29.62	110.20	100	197	Peak
8		5925.000	50.01	3.59	53.61	-34.59	88.20	100	197	Peak
9		5938.400	51.16	3.59	54.75	-33.45	88.20	100	197	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-22
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_5.9G Band_106Tone_RU106_CH 169_ANT 6+7	Test Voltage	By Notebook PC

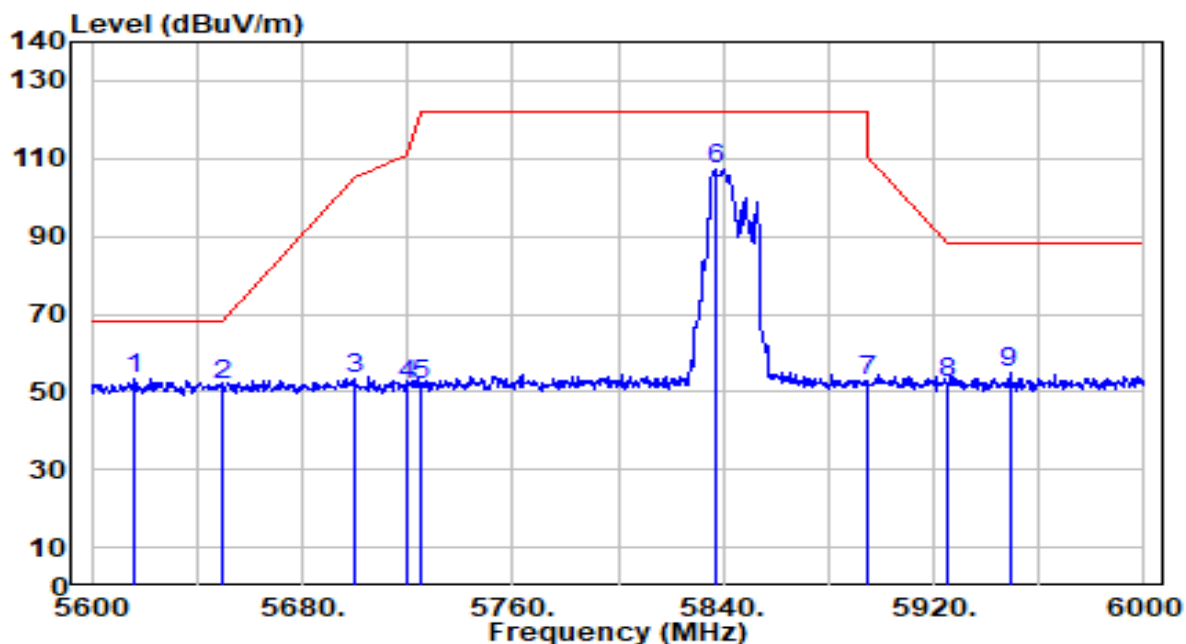


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5616.400	50.92	2.68	53.60	-14.60	68.20	100	84	Peak
2		5650.000	49.05	2.86	51.91	-16.29	68.20	100	84	Peak
3		5700.000	50.28	3.12	53.40	-51.80	105.20	100	84	Peak
4		5720.000	48.59	3.23	51.82	-58.98	110.80	100	84	Peak
5		5725.000	48.46	3.25	51.72	-70.48	122.20	100	84	Peak
6		5837.200	103.73	3.64	107.37	N/A	N/A	100	84	Peak
7		5895.000	49.16	3.60	52.76	-57.44	110.20	100	84	Peak
8		5925.000	48.91	3.59	52.50	-35.70	88.20	100	84	Peak
9		5948.800	51.17	3.59	54.76	-33.44	88.20	100	84	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-22
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_5.9G Band_106Tone_RU106_CH 169_ANT 6+7	Test Voltage	By Notebook PC

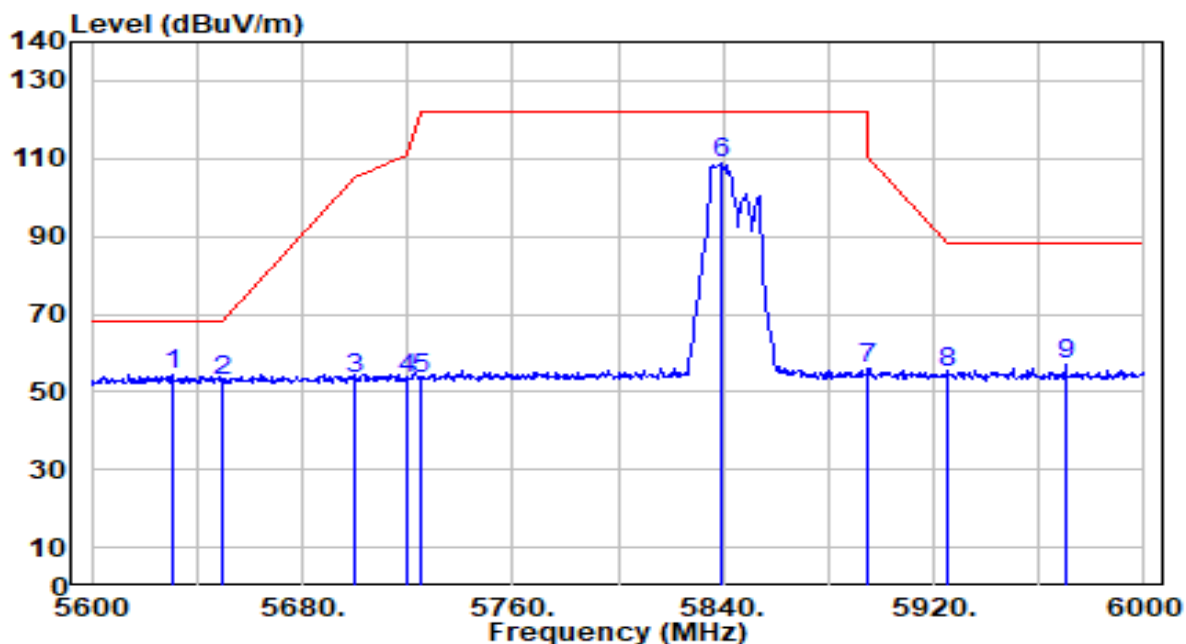


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5630.800	51.66	2.76	54.41	-13.79	68.20	100	84	Peak
2		5650.000	49.97	2.86	52.82	-15.38	68.20	100	84	Peak
3		5700.000	50.28	3.12	53.40	-51.80	105.20	100	84	Peak
4		5720.000	50.15	3.23	53.37	-57.43	110.80	100	84	Peak
5		5725.000	50.29	3.25	53.55	-68.65	122.20	100	84	Peak
6		5839.200	105.03	3.64	108.67	N/A	N/A	100	84	Peak
7		5895.000	52.32	3.60	55.92	-54.28	110.20	100	84	Peak
8		5925.000	51.29	3.59	54.88	-33.32	88.20	100	84	Peak
9		5970.000	53.71	3.58	57.29	-30.91	88.20	100	84	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-22
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_5.9G Band_106Tone_RU107_CH 177_ANT 6+7	Test Voltage	By Notebook PC

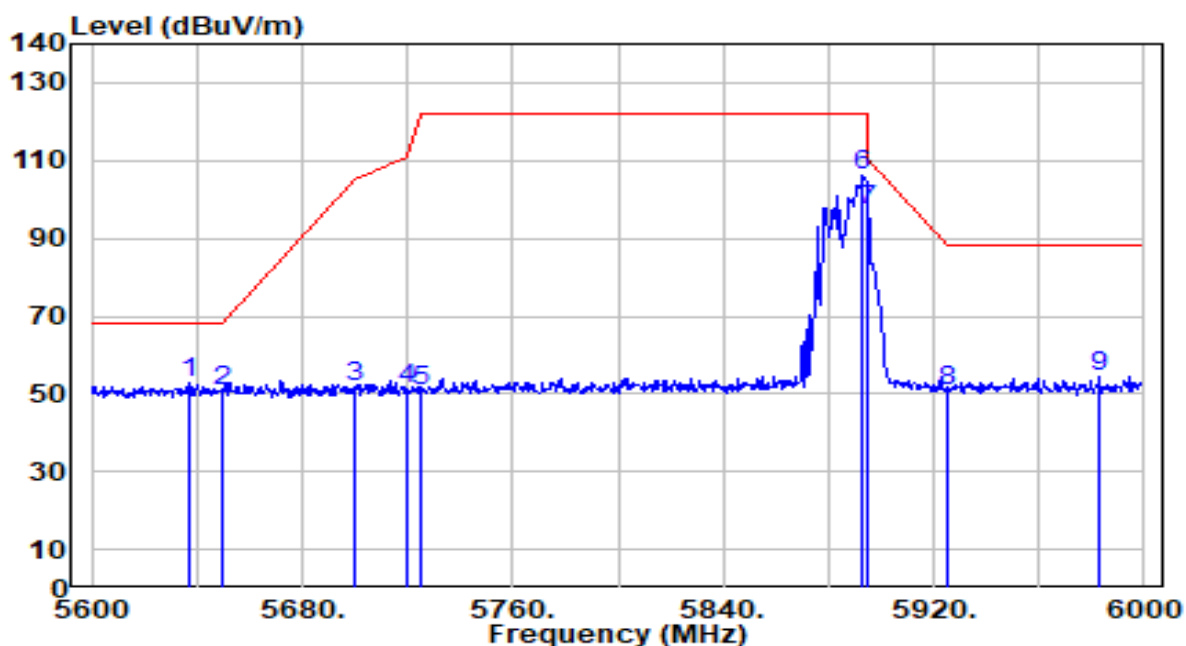


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5637.200	50.21	2.79	52.99	-15.21	68.20	176	336	Peak
2	5650.000	47.75	2.86	50.61	-17.59	68.20	176	336	Peak
3	5700.000	48.92	3.12	52.03	-53.17	105.20	176	336	Peak
4	5720.000	48.20	3.23	51.43	-59.37	110.80	176	336	Peak
5	5725.000	47.65	3.25	50.90	-71.30	122.20	176	336	Peak
6	5893.200	102.61	3.60	106.21	N/A	N/A	176	336	Peak
7	* 5895.000	93.34	3.60	96.94	-13.26	110.20	176	336	Peak
8	5925.000	47.02	3.59	50.62	-37.58	88.20	176	336	Peak
9	5982.800	50.71	3.58	54.30	-33.90	88.20	176	336	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-22
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_5.9G Band_106Tone_RU107_CH 177_ANT 6+7	Test Voltage	By Notebook PC

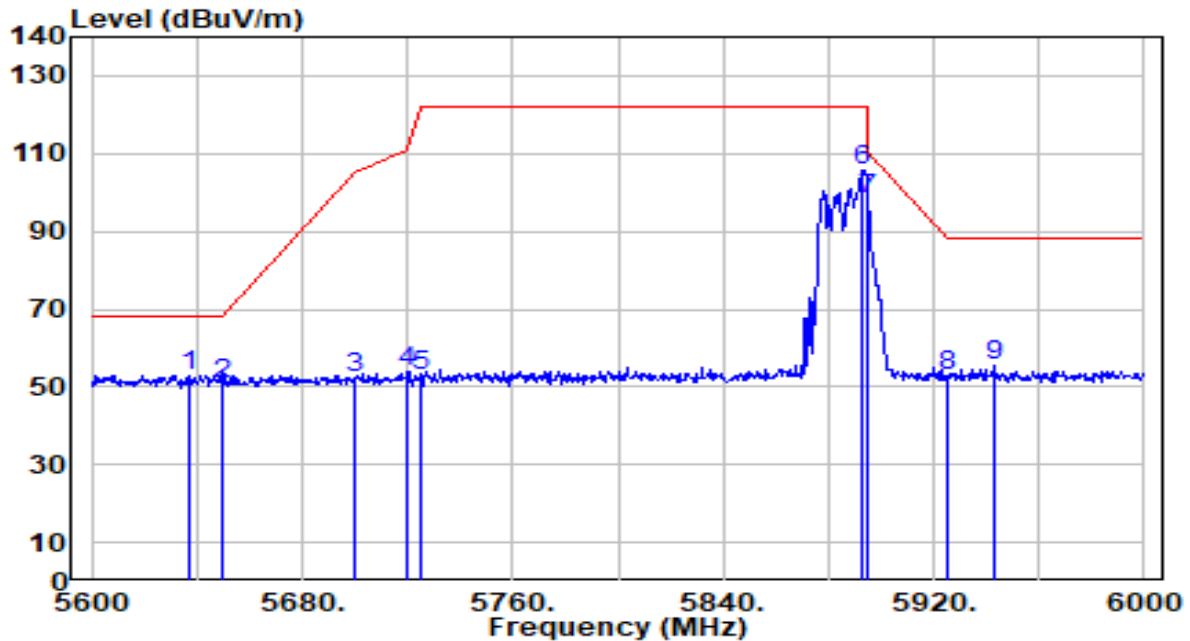


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5637.200	50.30	2.79	53.09	-15.11	68.20	100	84	Peak
2	5650.000	48.00	2.86	50.86	-17.34	68.20	100	84	Peak
3	5700.000	49.15	3.12	52.27	-52.93	105.20	100	84	Peak
4	5720.000	50.77	3.23	54.00	-56.80	110.80	100	84	Peak
5	5725.000	49.66	3.25	52.91	-69.29	122.20	100	84	Peak
6	5893.200	102.20	3.60	105.80	N/A	N/A	100	84	Peak
7	* 5895.000	94.61	3.60	98.21	-11.99	110.20	100	84	Peak
8	5925.000	49.19	3.59	52.79	-35.41	88.20	100	84	Peak
9	5943.200	51.82	3.59	55.41	-32.79	88.20	100	84	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-22
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_5.9G Band_242Tone_RU122_CH 169_ANT 6+7	Test Voltage	By Notebook PC

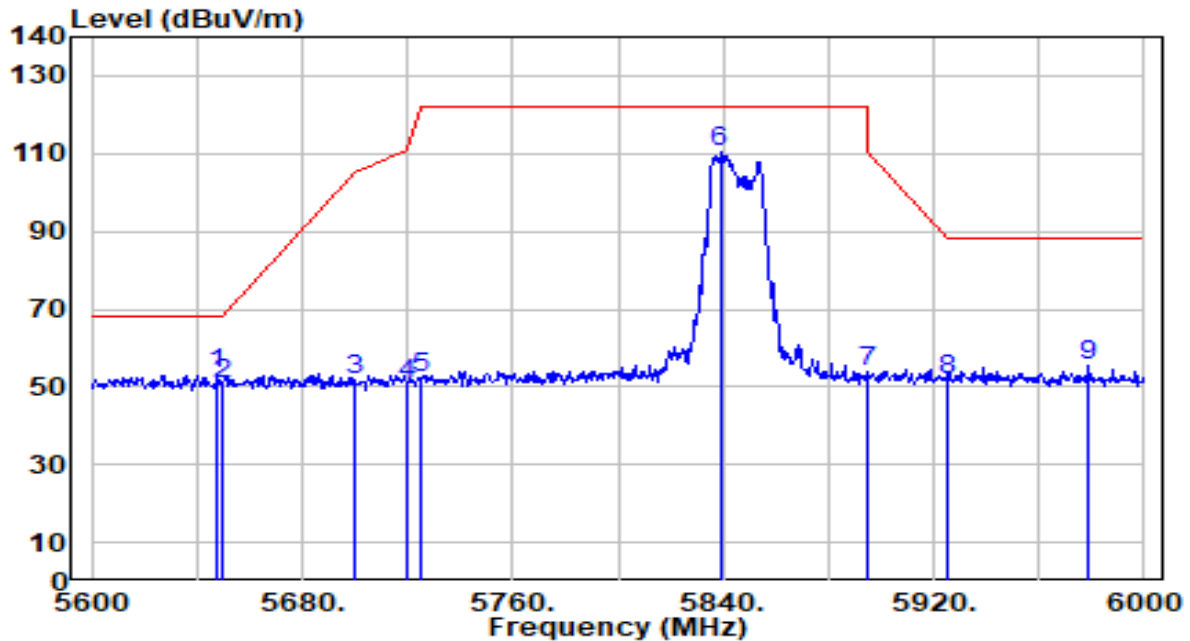


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5647.600	50.50	2.84	53.34	-14.86	68.20	187	360	Peak
2		5650.000	47.90	2.86	50.76	-17.44	68.20	187	360	Peak
3		5700.000	48.74	3.12	51.86	-53.34	105.20	187	360	Peak
4		5720.000	47.36	3.23	50.58	-60.22	110.80	187	360	Peak
5		5725.000	48.96	3.25	52.21	-69.99	122.20	187	360	Peak
6		5838.800	106.66	3.64	110.29	N/A	N/A	187	360	Peak
7		5895.000	50.15	3.60	53.75	-56.45	110.20	187	360	Peak
8		5925.000	48.01	3.59	51.60	-36.60	88.20	187	360	Peak
9		5978.800	51.73	3.58	55.31	-32.89	88.20	187	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-22
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_5.9G Band_242Tone_RU122_CH 169_ANT 6+7	Test Voltage	By Notebook PC

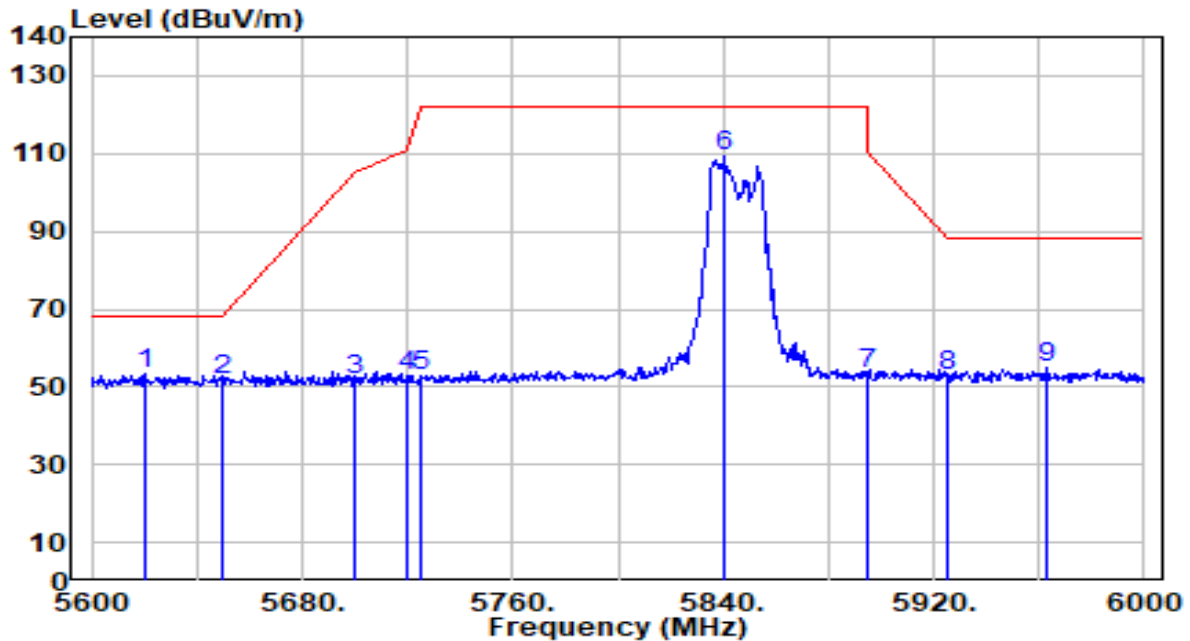


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5620.800	50.63	2.70	53.33	-14.87	68.20	100	84	Peak
2		5650.000	48.89	2.86	51.75	-16.45	68.20	100	84	Peak
3		5700.000	48.55	3.12	51.67	-53.53	105.20	100	84	Peak
4		5720.000	49.57	3.23	52.80	-58.00	110.80	100	84	Peak
5		5725.000	49.74	3.25	52.99	-69.21	122.20	100	84	Peak
6		5840.800	105.64	3.64	109.28	N/A	N/A	100	84	Peak
7		5895.000	49.66	3.60	53.26	-56.94	110.20	100	84	Peak
8		5925.000	49.10	3.59	52.69	-35.51	88.20	100	84	Peak
9		5963.200	51.19	3.59	54.78	-33.42	88.20	100	84	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-22
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_5.9G Band_242Tone_RU122_CH 177_ANT 6+7	Test Voltage	By Notebook PC

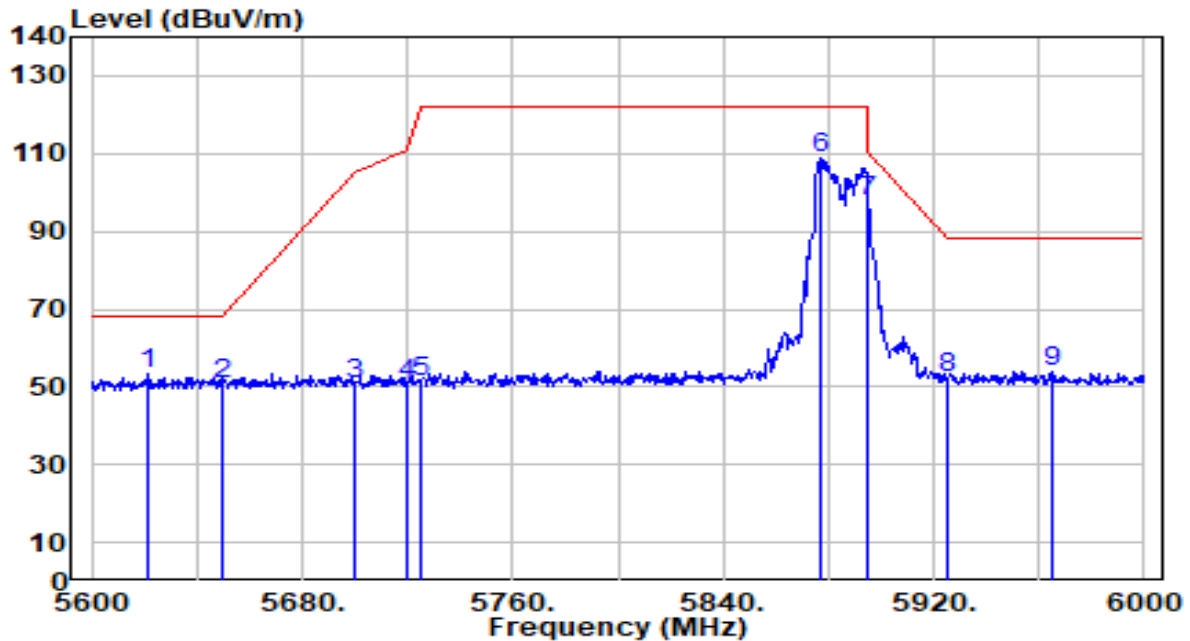


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5621.200	50.62	2.71	53.33	-14.87	68.20	176	336	Peak
2	5650.000	47.85	2.86	50.70	-17.50	68.20	176	336	Peak
3	5700.000	47.74	3.12	50.86	-54.34	105.20	176	336	Peak
4	5720.000	47.74	3.23	50.97	-59.83	110.80	176	336	Peak
5	5725.000	47.95	3.25	51.20	-71.00	122.20	176	336	Peak
6	5877.200	105.11	3.61	108.72	N/A	N/A	176	336	Peak
7	* 5895.000	93.95	3.60	97.55	-12.65	110.20	176	336	Peak
8	5925.000	48.64	3.59	52.23	-35.97	88.20	176	336	Peak
9	5965.200	50.45	3.59	54.04	-34.16	88.20	176	336	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-22
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_5.9G Band_242Tone_RU122_CH 177_ANT 6+7	Test Voltage	By Notebook PC

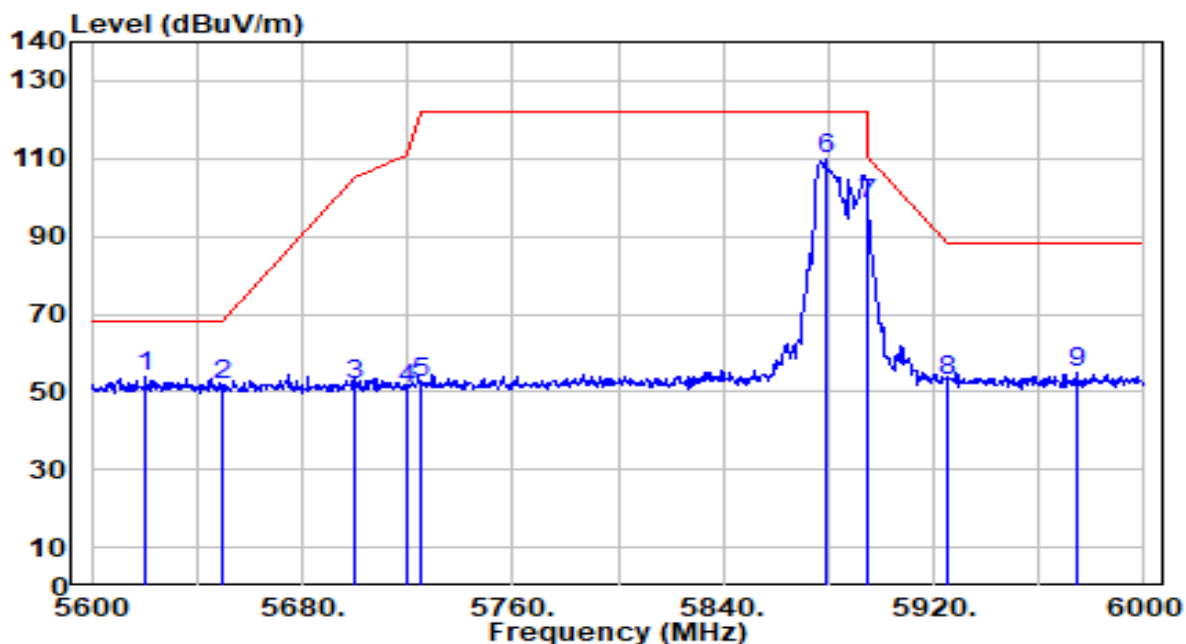


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5620.400	51.07	2.70	53.77	-14.43	68.20	100	84	Peak
2	5650.000	48.84	2.86	51.70	-16.50	68.20	100	84	Peak
3	5700.000	48.89	3.12	52.01	-53.19	105.20	100	84	Peak
4	5720.000	47.40	3.23	50.62	-60.18	110.80	100	84	Peak
5	5725.000	48.85	3.25	52.10	-70.10	122.20	100	84	Peak
6	5879.200	106.16	3.61	109.77	N/A	N/A	100	84	Peak
7	* 5895.000	94.77	3.60	98.37	-11.83	110.20	100	84	Peak
8	5925.000	48.99	3.59	52.58	-35.62	88.20	100	84	Peak
9	5974.400	51.58	3.58	55.16	-33.04	88.20	100	84	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-22
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_5.9G Band_52+26Tone_MRU1_CH 169_ANT 6+7	Test Voltage	By Notebook PC

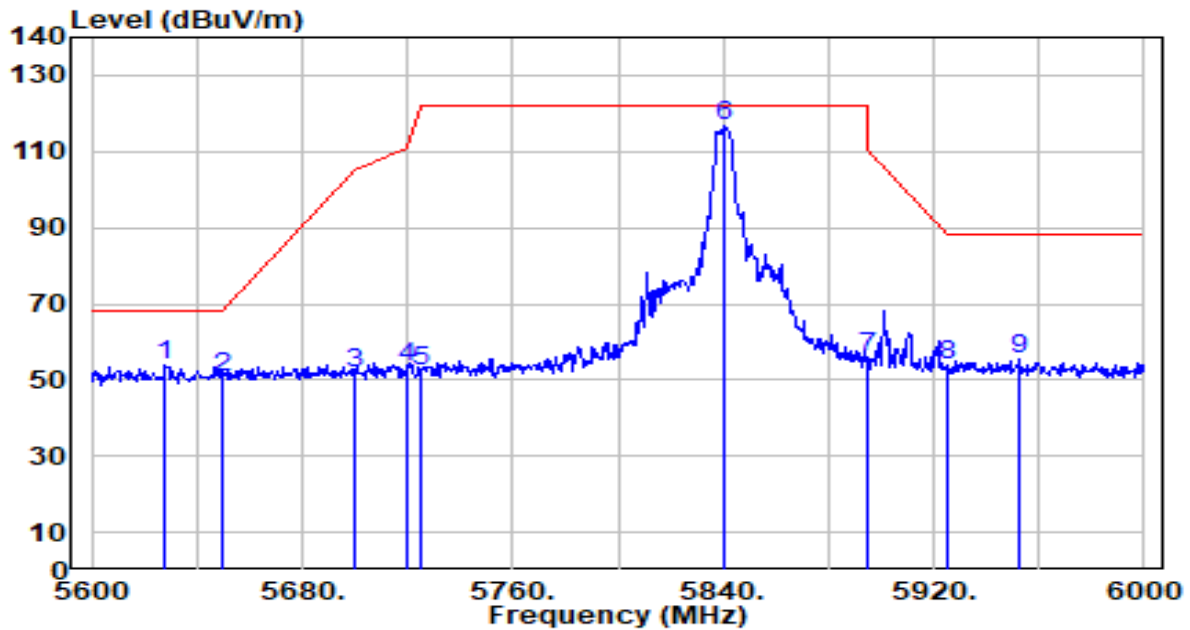


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5628.000	51.00	2.74	53.74	-14.46	68.20	207	360	Peak
2		5650.000	47.68	2.86	50.53	-17.67	68.20	207	360	Peak
3		5700.000	48.55	3.12	51.67	-53.53	105.20	207	360	Peak
4		5720.000	49.88	3.23	53.11	-57.69	110.80	207	360	Peak
5		5725.000	48.81	3.25	52.06	-70.14	122.20	207	360	Peak
6		5840.800	113.30	3.64	116.93	N/A	N/A	207	360	Peak
7		5895.000	52.50	3.60	56.10	-54.10	110.20	207	360	Peak
8		5925.000	50.33	3.59	53.92	-34.28	88.20	207	360	Peak
9		5952.400	51.95	3.59	55.53	-32.67	88.20	207	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-22
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_5.9G Band_52+26Tone_MRU1_CH 169_ANT 6+7	Test Voltage	By Notebook PC

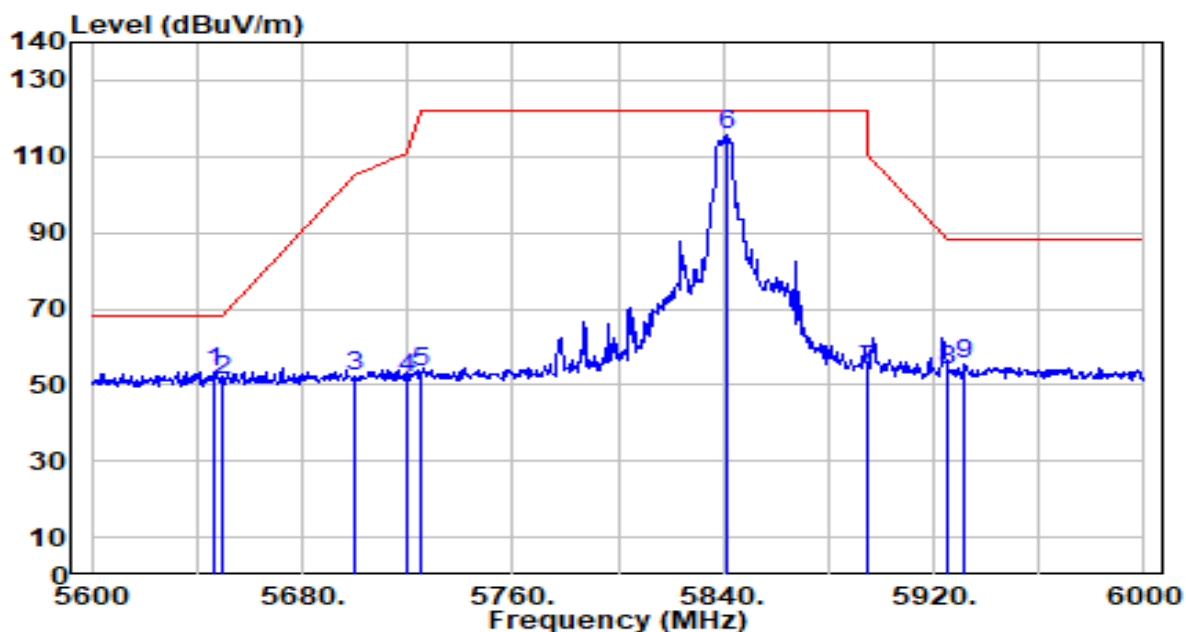


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5646.800	50.39	2.84	53.23	-14.97	68.20	173	46	Peak
2		5650.000	48.17	2.86	51.03	-17.17	68.20	173	46	Peak
3		5700.000	49.10	3.12	52.22	-52.98	105.20	173	46	Peak
4		5720.000	48.62	3.23	51.84	-58.96	110.80	173	46	Peak
5		5725.000	50.08	3.25	53.33	-68.87	122.20	173	46	Peak
6		5841.200	112.06	3.63	115.70	N/A	N/A	173	46	Peak
7		5895.000	50.47	3.60	54.07	-56.13	110.20	173	46	Peak
8		5925.000	50.22	3.59	53.81	-34.39	88.20	173	46	Peak
9		5932.000	51.68	3.59	55.27	-32.93	88.20	173	46	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-22
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_5.9G Band_52+26Tone_MRU3_CH 177_ANT 6+7	Test Voltage	By Notebook PC

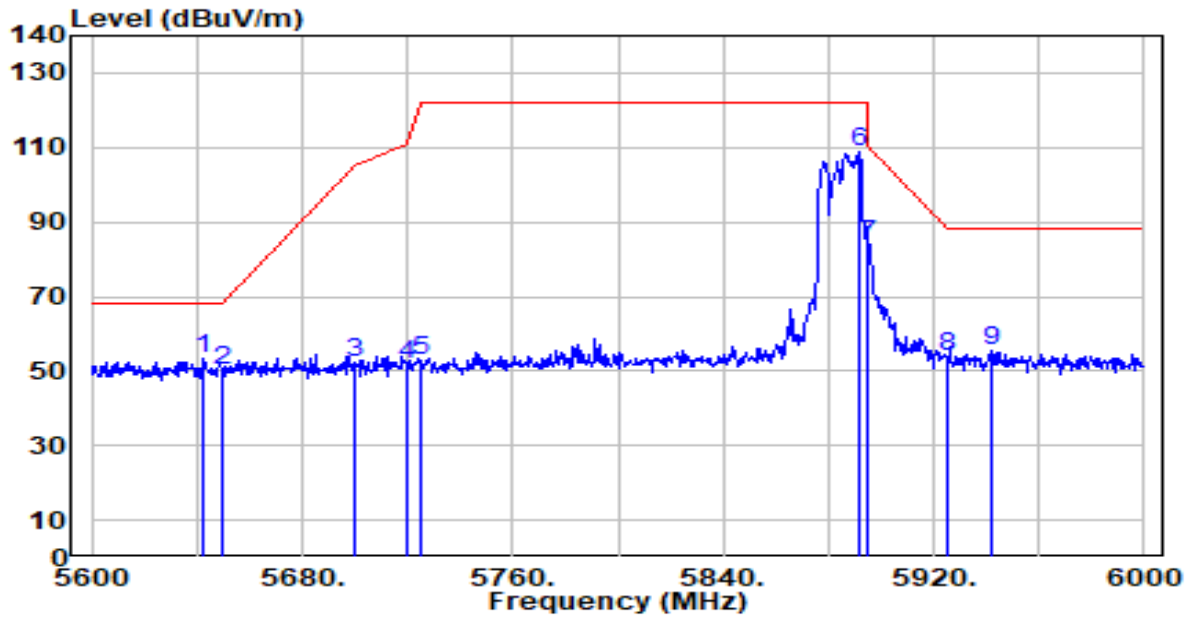


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5642.800	50.51	2.82	53.33	-14.87	68.20	230	0	Peak
2		5650.000	47.32	2.86	50.18	-18.02	68.20	230	0	Peak
3		5700.000	49.32	3.12	52.43	-52.77	105.20	230	0	Peak
4		5720.000	48.78	3.23	52.01	-58.79	110.80	230	0	Peak
5		5725.000	49.36	3.25	52.61	-69.59	122.20	230	0	Peak
6		5892.000	105.21	3.60	108.81	N/A	N/A	230	0	Peak
7		5895.000	80.46	3.60	84.06	-26.14	110.20	230	0	Peak
8		5925.000	50.30	3.59	53.89	-34.31	88.20	230	0	Peak
9		5941.600	51.67	3.59	55.26	-32.94	88.20	230	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-22
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_5.9G Band_52+26Tone_MRU3_CH 177_ANT 6+7	Test Voltage	By Notebook PC

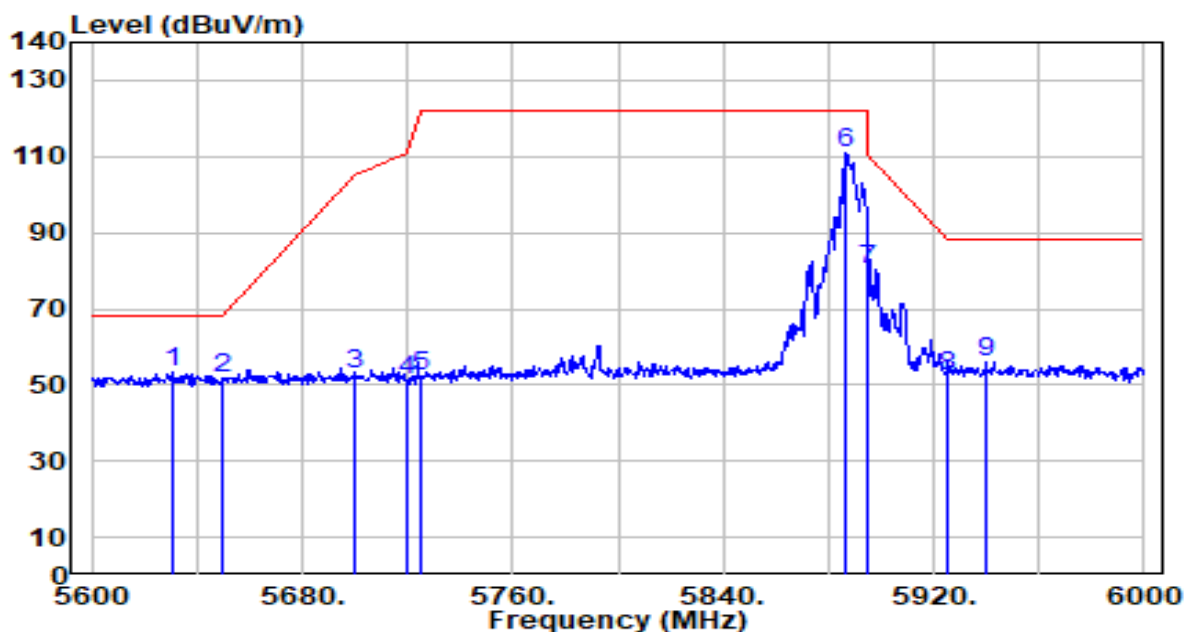


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5631.200	50.48	2.76	53.23	-14.97	68.20	162	79	Peak
2		5650.000	48.67	2.86	51.53	-16.67	68.20	162	79	Peak
3		5700.000	49.68	3.12	52.80	-52.40	105.20	162	79	Peak
4		5720.000	47.93	3.23	51.16	-59.64	110.80	162	79	Peak
5		5725.000	49.24	3.25	52.49	-69.71	122.20	162	79	Peak
6		5886.800	107.19	3.60	110.80	N/A	N/A	162	79	Peak
7		5895.000	76.87	3.60	80.47	-29.73	110.20	162	79	Peak
8		5925.000	48.81	3.59	52.40	-35.80	88.20	162	79	Peak
9		5940.000	52.64	3.59	56.23	-31.97	88.20	162	79	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-22
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_5.9G Band_106+26Tone_MRU1_CH 169_ANT 6+7	Test Voltage	By Notebook PC

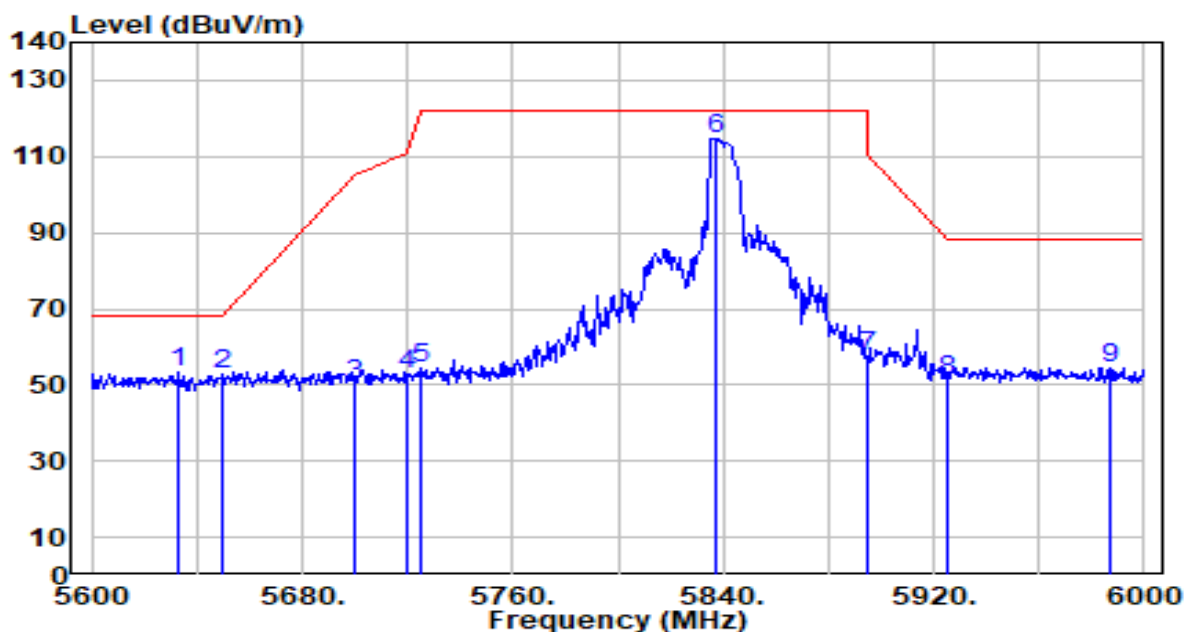


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5633.200	50.63	2.77	53.40	-14.80	68.20	207	360	Peak
2		5650.000	49.88	2.86	52.74	-15.46	68.20	207	360	Peak
3		5700.000	47.16	3.12	50.28	-54.92	105.20	207	360	Peak
4		5720.000	49.43	3.23	52.66	-58.14	110.80	207	360	Peak
5		5725.000	51.32	3.25	54.58	-67.62	122.20	207	360	Peak
6		5836.800	111.09	3.64	114.73	N/A	N/A	207	360	Peak
7		5895.000	53.88	3.60	57.48	-52.72	110.20	207	360	Peak
8		5925.000	47.45	3.59	51.04	-37.16	88.20	207	360	Peak
9		5986.800	50.93	3.58	54.51	-33.69	88.20	207	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-22
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_5.9G Band_106+26Tone_MRU1_CH 169_ANT 6+7	Test Voltage	By Notebook PC

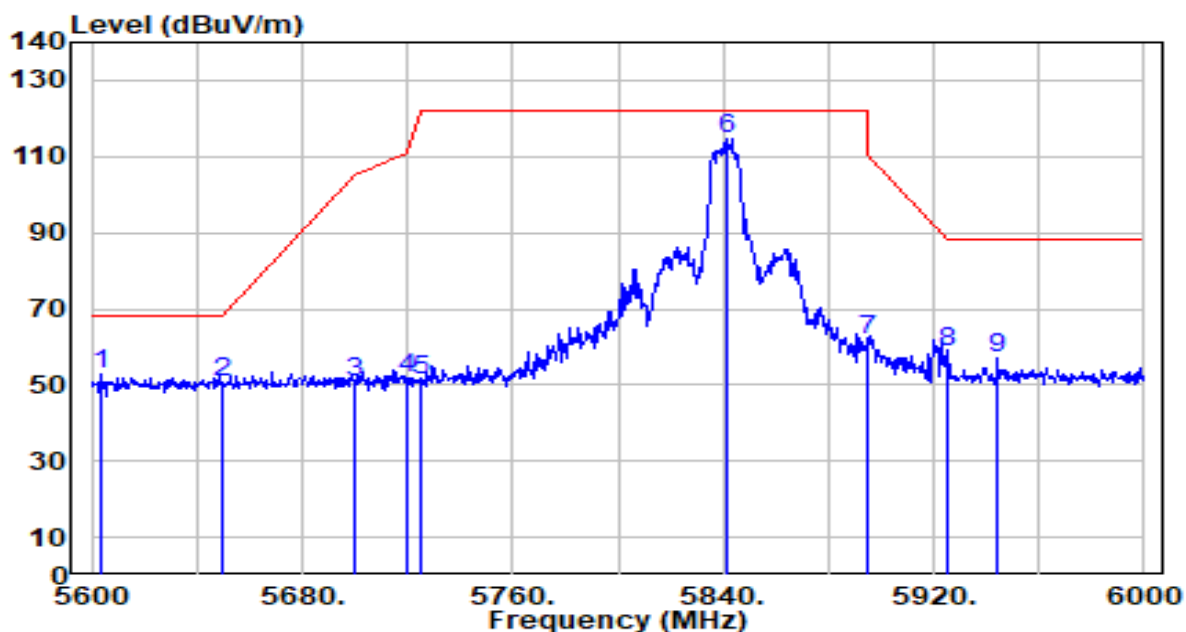


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5603.600	50.07	2.61	52.68	-15.52	68.20	173	46	Peak
2		5650.000	47.76	2.86	50.61	-17.59	68.20	173	46	Peak
3		5700.000	47.54	3.12	50.66	-54.54	105.20	173	46	Peak
4		5720.000	48.65	3.23	51.88	-58.92	110.80	173	46	Peak
5		5725.000	48.20	3.25	51.46	-70.74	122.20	173	46	Peak
6		5841.200	111.07	3.63	114.70	N/A	N/A	173	46	Peak
7		5895.000	58.34	3.60	61.94	-48.26	110.20	173	46	Peak
8		5925.000	55.01	3.59	58.60	-29.60	88.20	173	46	Peak
9		5944.400	53.46	3.59	57.05	-31.15	88.20	173	46	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-22
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_5.9G Band_106+26Tone_MRU3_CH 177_ANT 6+7	Test Voltage	By Notebook PC

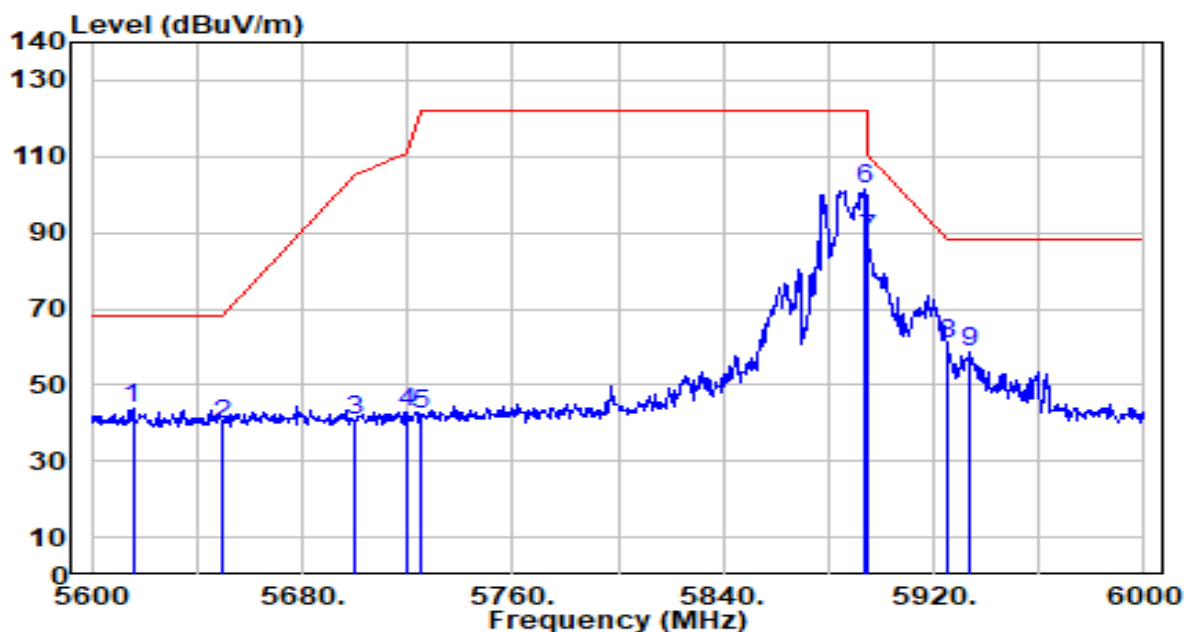


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5615.600	41.21	2.68	43.88	-24.32	68.20	230	0	Peak
2	5650.000	36.57	2.86	39.43	-28.77	68.20	230	0	Peak
3	5700.000	37.47	3.12	40.58	-64.62	105.20	230	0	Peak
4	5720.000	39.61	3.23	42.84	-67.96	110.80	230	0	Peak
5	5725.000	39.13	3.25	42.39	-79.81	122.20	230	0	Peak
6	5894.000	97.73	3.60	101.33	N/A	N/A	230	0	Peak
7	* 5895.000	84.87	3.60	88.47	-21.73	110.20	230	0	Peak
8	5925.000	57.24	3.59	60.83	-27.37	88.20	230	0	Peak
9	5934.000	55.09	3.59	58.68	-29.52	88.20	230	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-22
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_5.9G Band_106+26Tone_MRU3_CH 177_ANT 6+7	Test Voltage	By Notebook PC

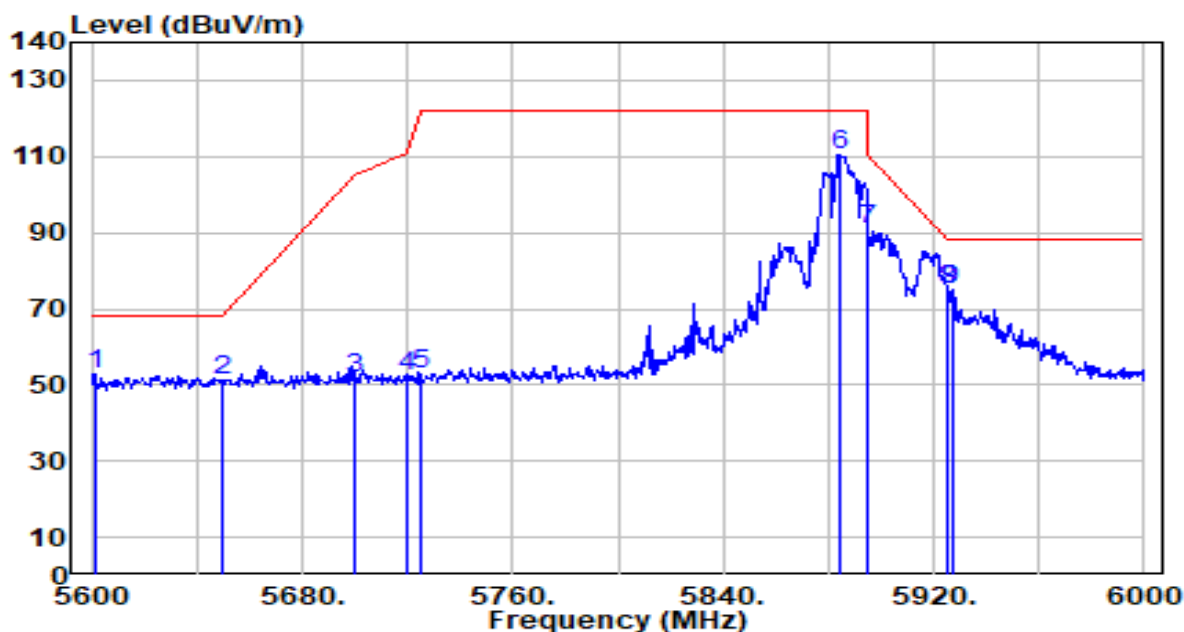


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5601.200	50.22	2.60	52.82	-15.38	68.20	162	79	Peak
2	5650.000	48.30	2.86	51.16	-17.04	68.20	162	79	Peak
3	5700.000	48.54	3.12	51.65	-53.55	105.20	162	79	Peak
4	5720.000	49.14	3.23	52.37	-58.43	110.80	162	79	Peak
5	5725.000	49.32	3.25	52.58	-69.62	122.20	162	79	Peak
6	5884.000	106.95	3.61	110.56	N/A	N/A	162	79	Peak
7	5895.000	87.24	3.60	90.84	-19.36	110.20	162	79	Peak
8	* 5925.000	71.55	3.59	75.14	-13.06	88.20	162	79	Peak
9	5926.800	71.53	3.59	75.12	-13.08	88.20	162	79	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-22
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-80MHz_TX_5.9G Band_484+242Tone_MRU1_CH 171_ANT 6+7	Test Voltage	By Notebook PC

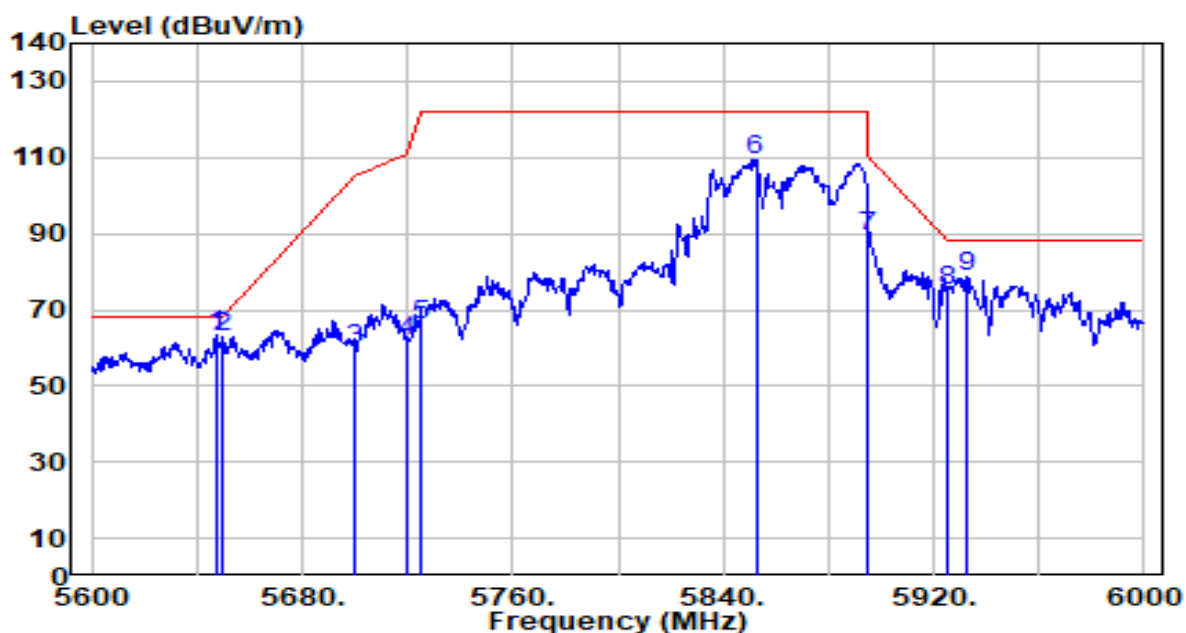


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5647.600	60.41	2.84	63.25	-4.95	68.20	219	0	Peak
2		5650.000	59.87	2.86	62.73	-5.47	68.20	219	0	Peak
3		5700.000	56.54	3.12	59.66	-45.54	105.20	219	0	Peak
4		5720.000	58.47	3.23	61.70	-49.10	110.80	219	0	Peak
5		5725.000	62.59	3.25	65.85	-56.35	122.20	219	0	Peak
6		5852.400	105.71	3.63	109.34	N/A	N/A	219	0	Peak
7		5895.000	85.49	3.60	89.08	-21.12	110.20	219	0	Peak
8		5925.000	71.20	3.59	74.79	-13.41	88.20	219	0	Peak
9		5932.400	74.89	3.59	78.48	-9.72	88.20	219	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-22
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-80MHz_TX_5.9G Band_484+242Tone_MRU1_CH 171_ANT 6+7	Test Voltage	By Notebook PC

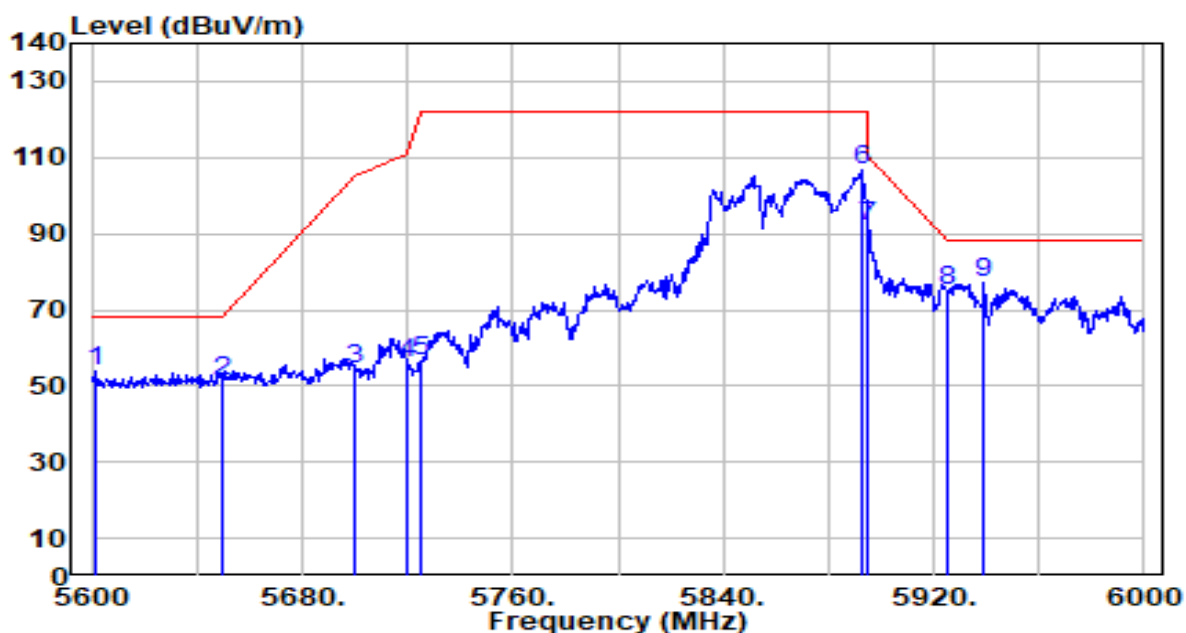


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5601.600	51.35	2.60	53.95	-14.25	68.20	165	359	Peak
2	5650.000	48.60	2.86	51.45	-16.75	68.20	165	359	Peak
3	5700.000	51.41	3.12	54.53	-50.67	105.20	165	359	Peak
4	5720.000	52.94	3.23	56.16	-54.64	110.80	165	359	Peak
5	5725.000	53.17	3.25	56.42	-65.78	122.20	165	359	Peak
6	5892.400	103.37	3.60	106.97	N/A	N/A	165	359	Peak
7	5895.000	88.19	3.60	91.79	-18.41	110.20	165	359	Peak
8	5925.000	71.42	3.59	75.01	-13.19	88.20	165	359	Peak
9	* 5938.800	73.54	3.59	77.13	-11.07	88.20	165	359	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-22
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_TX_5.9G Band_996+484Tone_MRU1_CH 163_ANT 6+7	Test Voltage	By Notebook PC

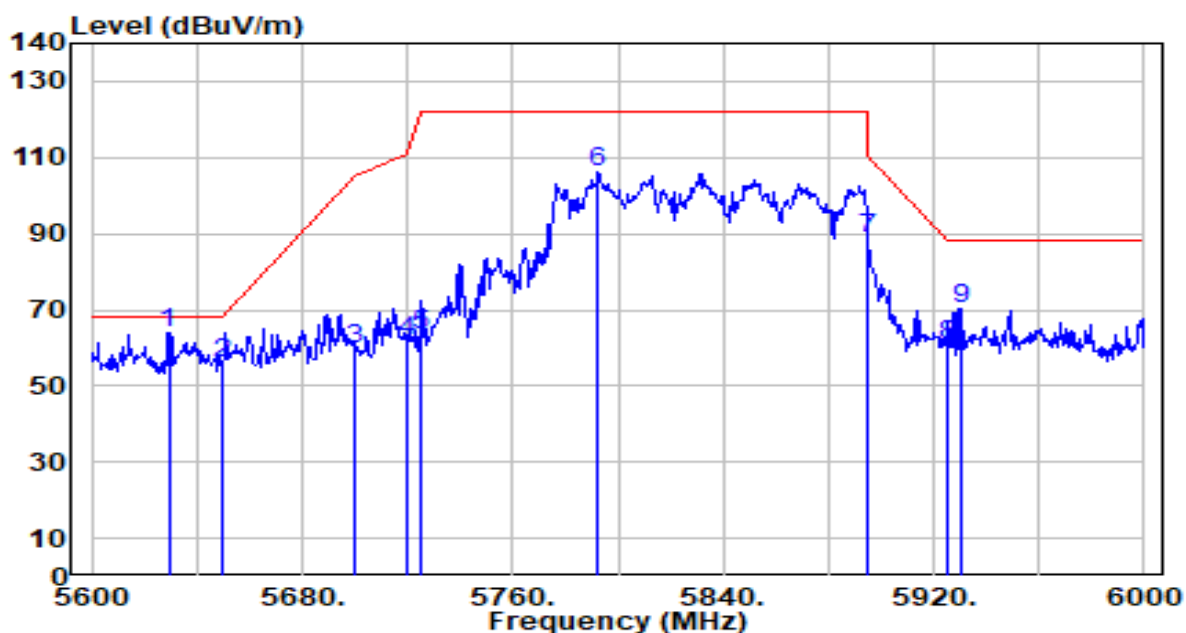


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5629.200	61.40	2.75	64.15	-4.05	68.20	250	0	Peak
2		5650.000	53.02	2.86	55.87	-12.33	68.20	250	0	Peak
3		5700.000	56.73	3.12	59.85	-45.35	105.20	250	0	Peak
4		5720.000	58.45	3.23	61.68	-49.12	110.80	250	0	Peak
5		5725.000	60.07	3.25	63.33	-58.87	122.20	250	0	Peak
6		5792.400	102.54	3.62	106.16	N/A	N/A	250	0	Peak
7		5895.000	85.34	3.60	88.94	-21.26	110.20	250	0	Peak
8		5925.000	56.95	3.59	60.54	-27.66	88.20	250	0	Peak
9		5930.000	66.79	3.59	70.38	-17.82	88.20	250	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-22
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_TX_5.9G Band_996+484Tone_MRU1_CH 163_ANT 6+7	Test Voltage	By Notebook PC

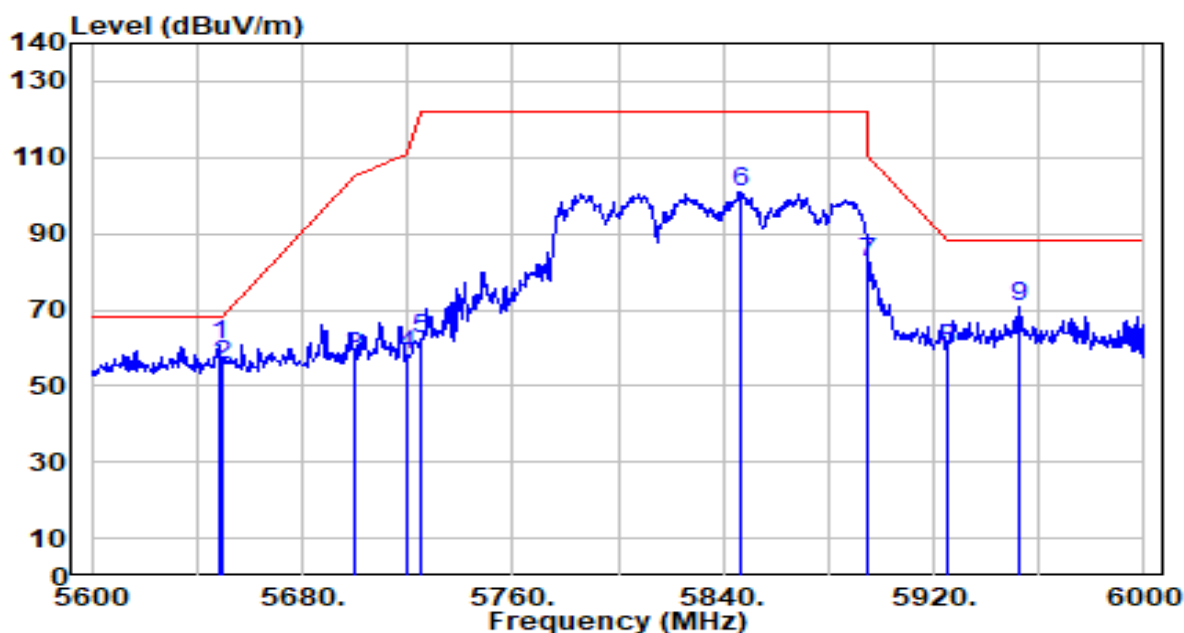


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5648.400	57.99	2.85	60.83	-7.37	68.20	100	311	Peak
2		5650.000	52.74	2.86	55.60	-12.60	68.20	100	311	Peak
3		5700.000	54.60	3.12	57.72	-47.48	105.20	100	311	Peak
4		5720.000	54.93	3.23	58.15	-52.65	110.80	100	311	Peak
5		5725.000	59.31	3.25	62.57	-59.63	122.20	100	311	Peak
6		5846.400	97.10	3.63	100.73	N/A	N/A	100	311	Peak
7		5895.000	78.68	3.60	82.28	-27.92	110.20	100	311	Peak
8		5925.000	56.14	3.59	59.73	-28.47	88.20	100	311	Peak
9		5952.400	67.00	3.59	70.59	-17.61	88.20	100	311	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-22
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-80MHz_TX_5.9G Band_484+242Tone_PUN2_CH 171_ANT 6+7_Puncture Mode	Test Voltage	By Notebook PC

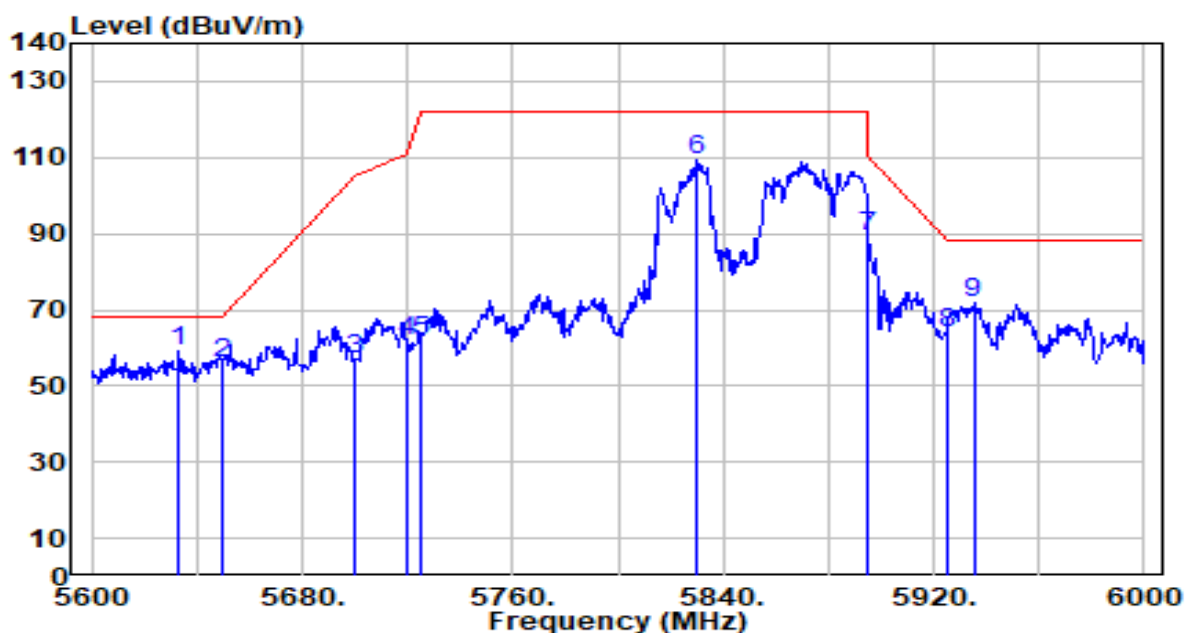


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5633.200	56.31	2.77	59.08	-9.12	68.20	225	360	Peak
2		5650.000	52.93	2.86	55.78	-12.42	68.20	225	360	Peak
3		5700.000	53.78	3.12	56.90	-48.30	105.20	225	360	Peak
4		5720.000	58.60	3.23	61.83	-48.97	110.80	225	360	Peak
5		5725.000	58.41	3.25	61.67	-60.53	122.20	225	360	Peak
6		5830.000	105.76	3.64	109.40	N/A	N/A	225	360	Peak
7		5895.000	85.45	3.60	89.05	-21.15	110.20	225	360	Peak
8		5925.000	60.46	3.59	64.05	-24.15	88.20	225	360	Peak
9		5935.200	68.29	3.59	71.88	-16.32	88.20	225	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-22
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-80MHz_TX_5.9G Band_484+242Tone_PUN2_CH 171_ANT 6+7_Puncture Mode	Test Voltage	By Notebook PC

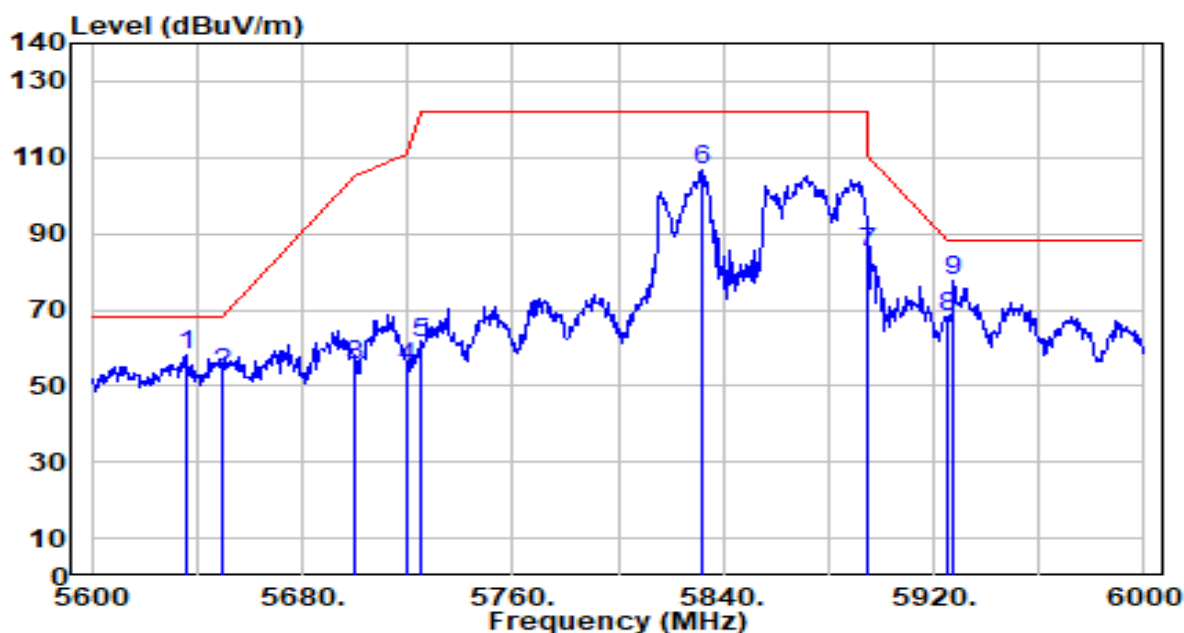


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5635.600	55.39	2.78	58.17	-10.03	68.20	151	64	Peak
2		5650.000	50.61	2.86	53.47	-14.73	68.20	151	64	Peak
3		5700.000	52.16	3.12	55.28	-49.92	105.20	151	64	Peak
4		5720.000	51.86	3.23	55.08	-55.72	110.80	151	64	Peak
5		5725.000	58.11	3.25	61.37	-60.83	122.20	151	64	Peak
6		5832.400	103.29	3.64	106.93	N/A	N/A	151	64	Peak
7		5895.000	81.52	3.60	85.12	-25.08	110.20	151	64	Peak
8		5925.000	64.51	3.59	68.10	-20.10	88.20	151	64	Peak
9		5927.600	73.95	3.59	77.54	-10.66	88.20	151	64	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-22
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_TX_5.9G Band_996+484Tone_40-PUN3_CH 163_ANT 6+7_Puncture Mode	Test Voltage	By Notebook PC

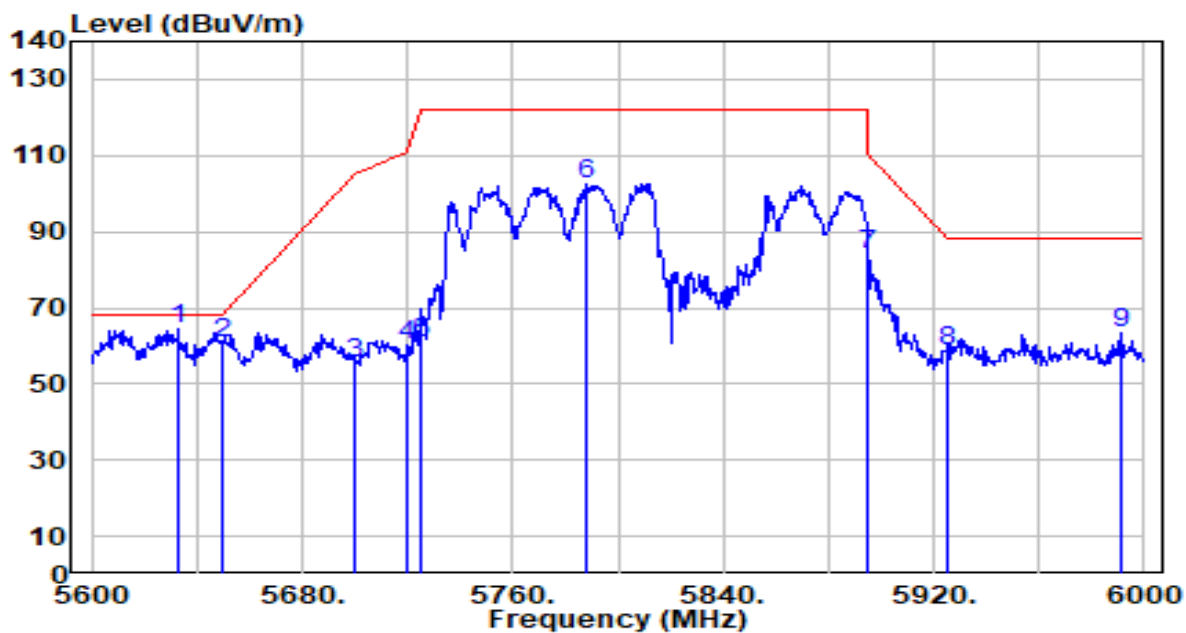


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5632.800	61.73	2.77	64.49	-3.71	68.20	220	360	Peak
2		5650.000	58.11	2.86	60.97	-7.23	68.20	220	360	Peak
3		5700.000	52.37	3.12	55.49	-49.71	105.20	220	360	Peak
4		5720.000	56.77	3.23	59.99	-50.81	110.80	220	360	Peak
5		5725.000	57.29	3.25	60.54	-61.66	122.20	220	360	Peak
6		5787.600	99.13	3.59	102.72	N/A	N/A	220	360	Peak
7		5895.000	80.39	3.60	83.99	-26.21	110.20	220	360	Peak
8		5925.000	54.98	3.59	58.57	-29.63	88.20	220	360	Peak
9		5990.800	59.70	3.58	63.28	-24.92	88.20	220	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-22
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_TX_5.9G Band_996+484Tone_40-PUN3_CH 163_ANT 6+7_Puncture Mode	Test Voltage	By Notebook PC

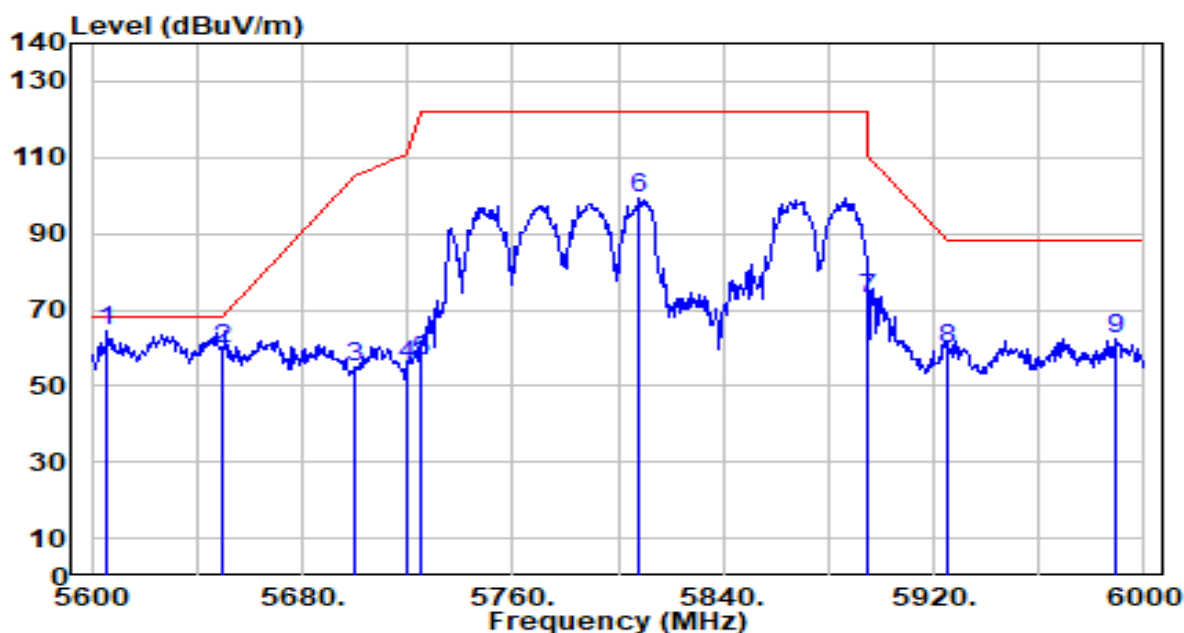


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5606.000	61.66	2.63	64.29	-3.91	68.20	100	68	Peak
2		5650.000	56.94	2.86	59.79	-8.41	68.20	100	68	Peak
3		5700.000	51.62	3.12	54.74	-50.46	105.20	100	68	Peak
4		5720.000	52.38	3.23	55.60	-55.20	110.80	100	68	Peak
5		5725.000	53.43	3.25	56.69	-65.51	122.20	100	68	Peak
6		5808.000	95.63	3.66	99.29	N/A	N/A	100	68	Peak
7		5895.000	69.20	3.60	72.80	-37.40	110.20	100	68	Peak
8		5925.000	55.92	3.59	59.51	-28.69	88.20	100	68	Peak
9		5988.800	58.85	3.58	62.43	-25.77	88.20	100	68	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-22
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_TX_5.9G Band_996+484+242Tone_20-PUN2_CH 163_ANT 6+7_Puncture Mode	Test Voltage	By Notebook PC

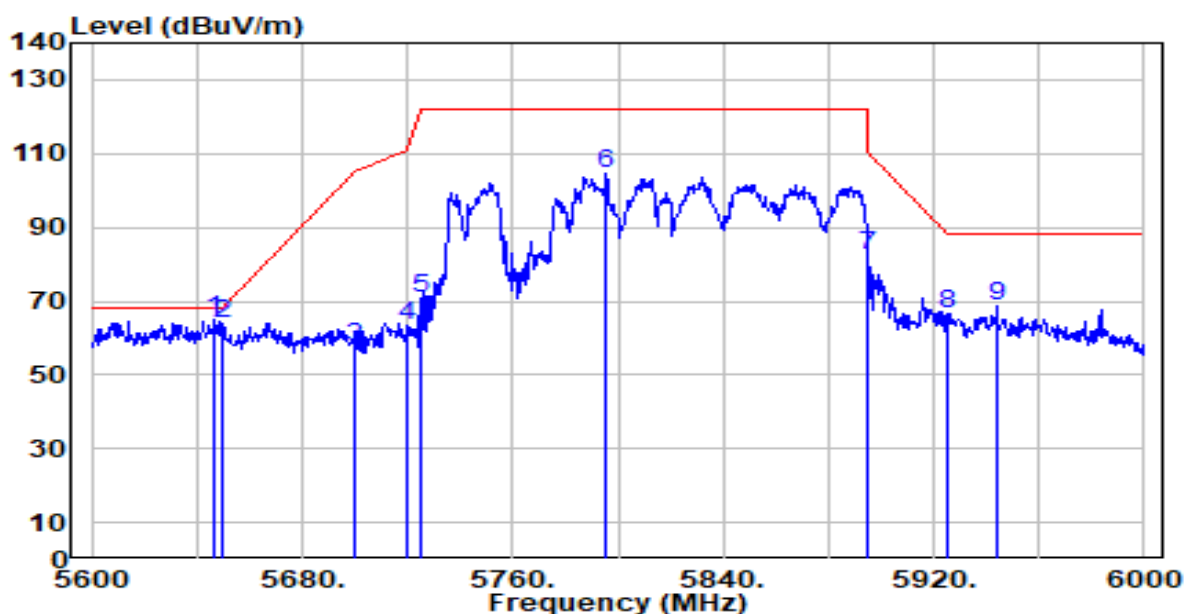


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5646.800	62.19	2.84	65.03	-3.17	68.20	220	360	Peak
2		5650.000	61.32	2.86	64.18	-4.02	68.20	220	360	Peak
3		5700.000	54.36	3.12	57.48	-47.72	105.20	220	360	Peak
4		5720.000	59.98	3.23	63.21	-47.59	110.80	220	360	Peak
5		5725.000	67.33	3.25	70.58	-51.62	122.20	220	360	Peak
6		5795.600	100.87	3.64	104.51	N/A	N/A	220	360	Peak
7		5895.000	79.07	3.60	82.67	-27.53	110.20	220	360	Peak
8		5925.000	62.84	3.59	66.43	-21.77	88.20	220	360	Peak
9		5944.000	65.32	3.59	68.91	-19.29	88.20	220	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-22
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_TX_5.9G Band_996+484+242Tone_20-PUN2_CH 163_ANT 6+7_Puncture Mode	Test Voltage	By Notebook PC

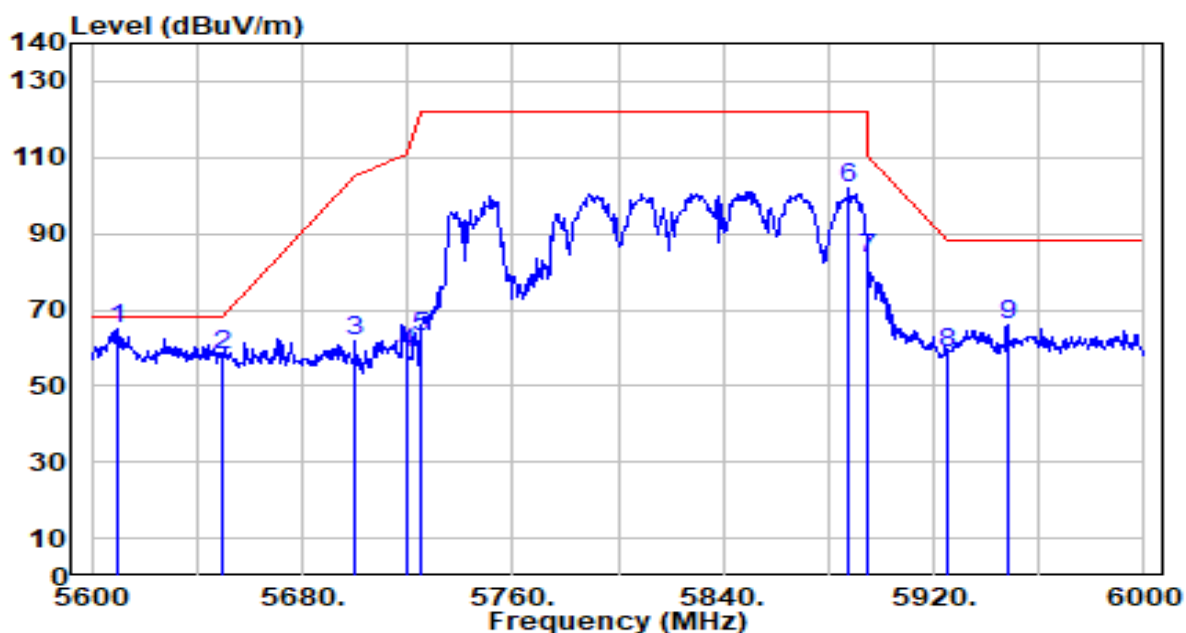


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5610.000	62.58	2.65	65.23	-2.97	68.20	132	68	Peak
2		5650.000	55.10	2.86	57.95	-10.25	68.20	132	68	Peak
3		5700.000	58.86	3.12	61.98	-43.22	105.20	132	68	Peak
4		5720.000	55.32	3.23	58.55	-52.25	110.80	132	68	Peak
5		5725.000	59.49	3.25	62.74	-59.46	122.20	132	68	Peak
6		5888.000	98.17	3.60	101.77	N/A	N/A	132	68	Peak
7		5895.000	80.03	3.60	83.63	-26.57	110.20	132	68	Peak
8		5925.000	55.00	3.59	58.59	-29.61	88.20	132	68	Peak
9		5948.000	62.68	3.59	66.26	-21.94	88.20	132	68	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-22
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_TX_5.9G Band_996+484+242Tone_20-PUN3_CH 163_ANT 6+7_Puncture Mode	Test Voltage	By Notebook PC

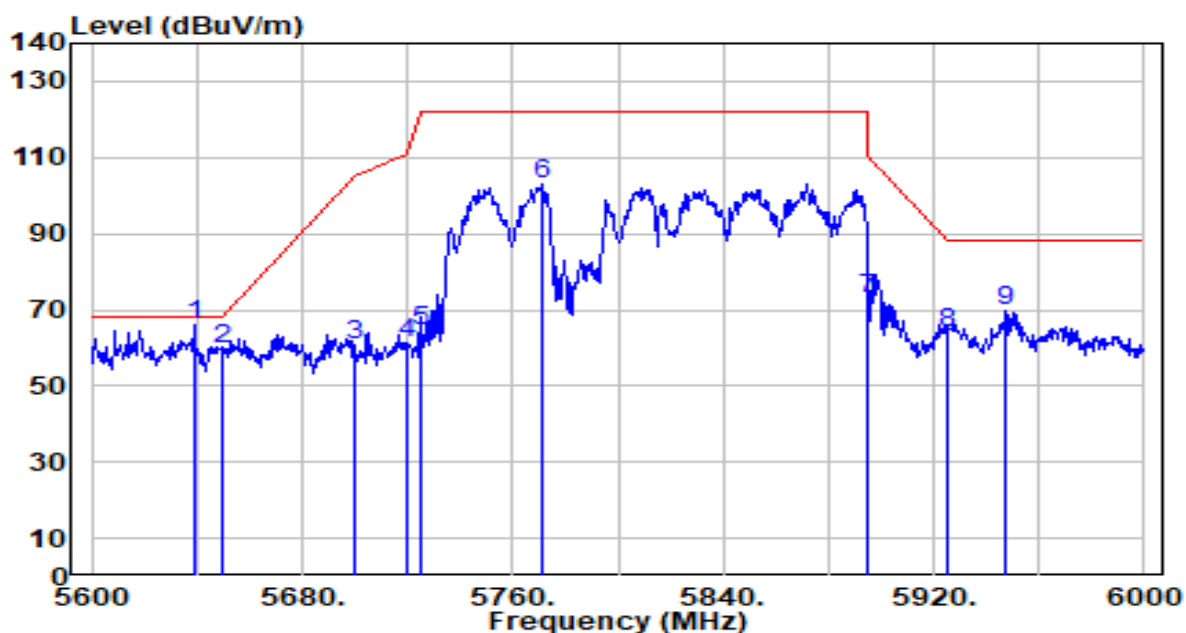


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5638.800	63.19	2.80	65.98	-2.22	68.20	220	360	Peak
2		5650.000	56.69	2.86	59.55	-8.65	68.20	220	360	Peak
3		5700.000	57.58	3.12	60.70	-44.50	105.20	220	360	Peak
4		5720.000	58.04	3.23	61.27	-49.53	110.80	220	360	Peak
5		5725.000	60.98	3.25	64.23	-57.97	122.20	220	360	Peak
6		5770.800	99.50	3.50	103.00	N/A	N/A	220	360	Peak
7		5895.000	69.37	3.60	72.97	-37.23	110.20	220	360	Peak
8		5925.000	60.24	3.59	63.83	-24.37	88.20	220	360	Peak
9		5947.600	65.98	3.59	69.57	-18.63	88.20	220	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-22
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_TX_5.9G Band_996+484+242Tone_20-PUN3_CH 163_ANT 6+7_Puncture Mode	Test Voltage	By Notebook PC

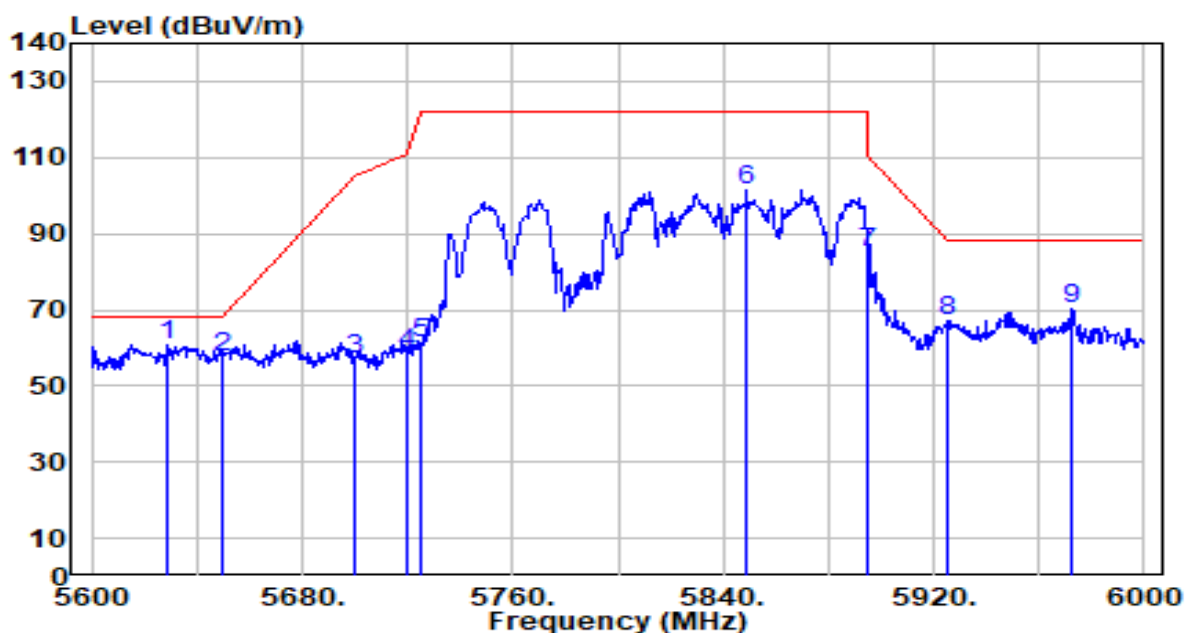


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5628.400	58.17	2.74	60.91	-7.29	68.20	132	68	Peak
2		5650.000	54.83	2.86	57.69	-10.51	68.20	132	68	Peak
3		5700.000	53.89	3.12	57.01	-48.19	105.20	132	68	Peak
4		5720.000	55.49	3.23	58.72	-52.08	110.80	132	68	Peak
5		5725.000	58.23	3.25	61.49	-60.71	122.20	132	68	Peak
6		5848.800	97.91	3.63	101.54	N/A	N/A	132	68	Peak
7		5895.000	81.60	3.60	85.20	-25.00	110.20	132	68	Peak
8		5925.000	63.76	3.59	67.35	-20.85	88.20	132	68	Peak
9		5972.000	66.77	3.58	70.36	-17.84	88.20	132	68	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-22
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_TX_5.9G Band_996+484+242Tone_20-PUN4_CH 163_ANT 6+7_Puncture Mode	Test Voltage	By Notebook PC

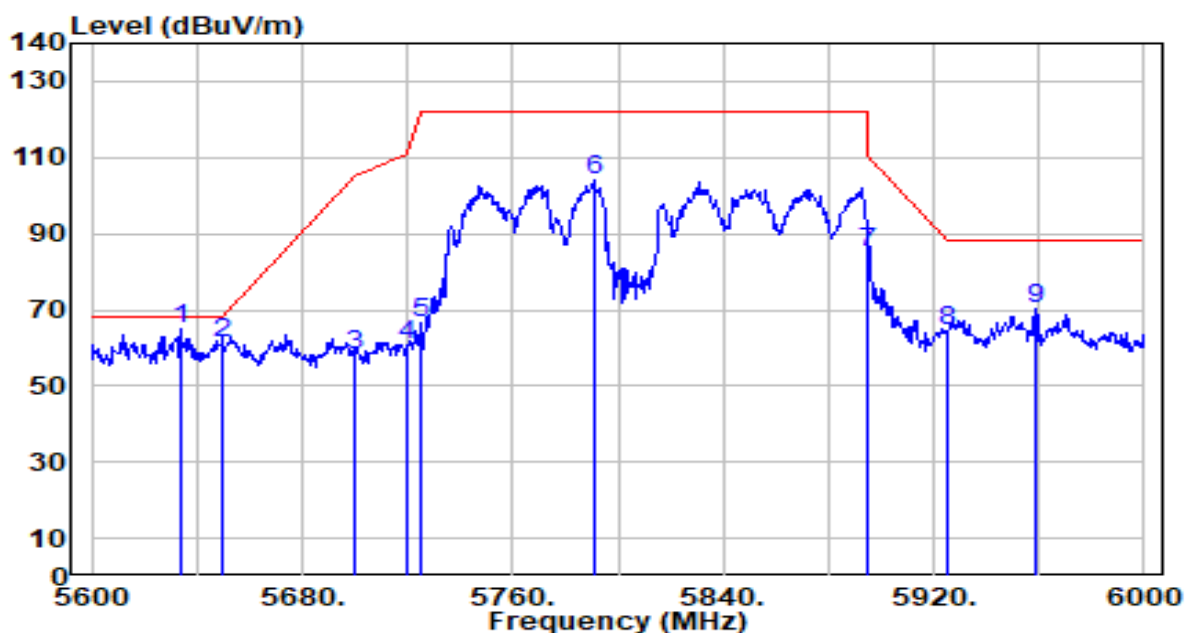


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5634.000	62.13	2.77	64.90	-3.30	68.20	220	360	Peak
2		5650.000	58.57	2.86	61.42	-6.78	68.20	220	360	Peak
3		5700.000	54.80	3.12	57.91	-47.29	105.20	220	360	Peak
4		5720.000	57.60	3.23	60.82	-49.98	110.80	220	360	Peak
5		5725.000	63.39	3.25	66.64	-55.56	122.20	220	360	Peak
6		5790.800	100.29	3.61	103.90	N/A	N/A	220	360	Peak
7		5895.000	81.59	3.60	85.19	-25.01	110.20	220	360	Peak
8		5925.000	60.94	3.59	64.53	-23.67	88.20	220	360	Peak
9		5959.200	66.64	3.59	70.23	-17.97	88.20	220	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-22
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_TX_5.9G Band_996+484+242Tone_20-PUN4_CH 163_ANT 6+7_Puncture Mode	Test Voltage	By Notebook PC

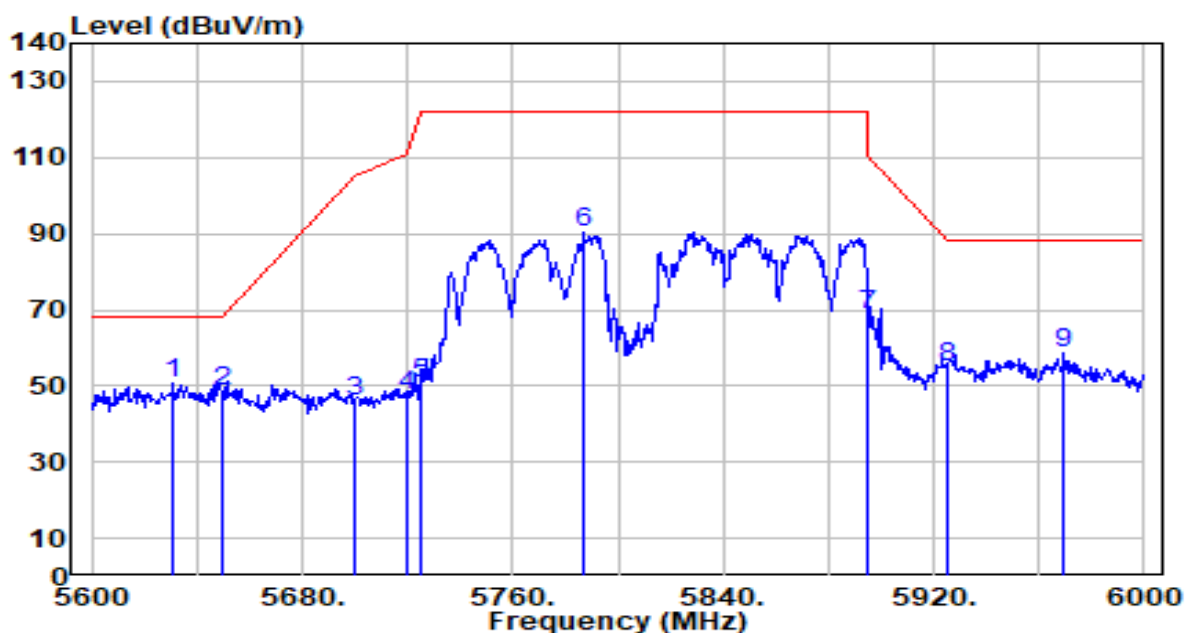


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5630.800	48.13	2.76	50.88	-17.32	68.20	132	68	Peak
2		5650.000	45.51	2.86	48.37	-19.83	68.20	132	68	Peak
3		5700.000	43.02	3.12	46.14	-59.06	105.20	132	68	Peak
4		5720.000	44.34	3.23	47.57	-63.23	110.80	132	68	Peak
5		5725.000	47.25	3.25	50.50	-71.70	122.20	132	68	Peak
6		5786.800	86.69	3.59	90.28	N/A	N/A	132	68	Peak
7		5895.000	64.90	3.60	68.50	-41.70	110.20	132	68	Peak
8		5925.000	51.35	3.59	54.95	-33.25	88.20	132	68	Peak
9		5969.200	54.80	3.58	58.38	-29.82	88.20	132	68	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-22
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_TX_5.9G Band_996+484+242Tone_20-PUN5_CH 163_ANT 6+7_Puncture Mode	Test Voltage	By Notebook PC

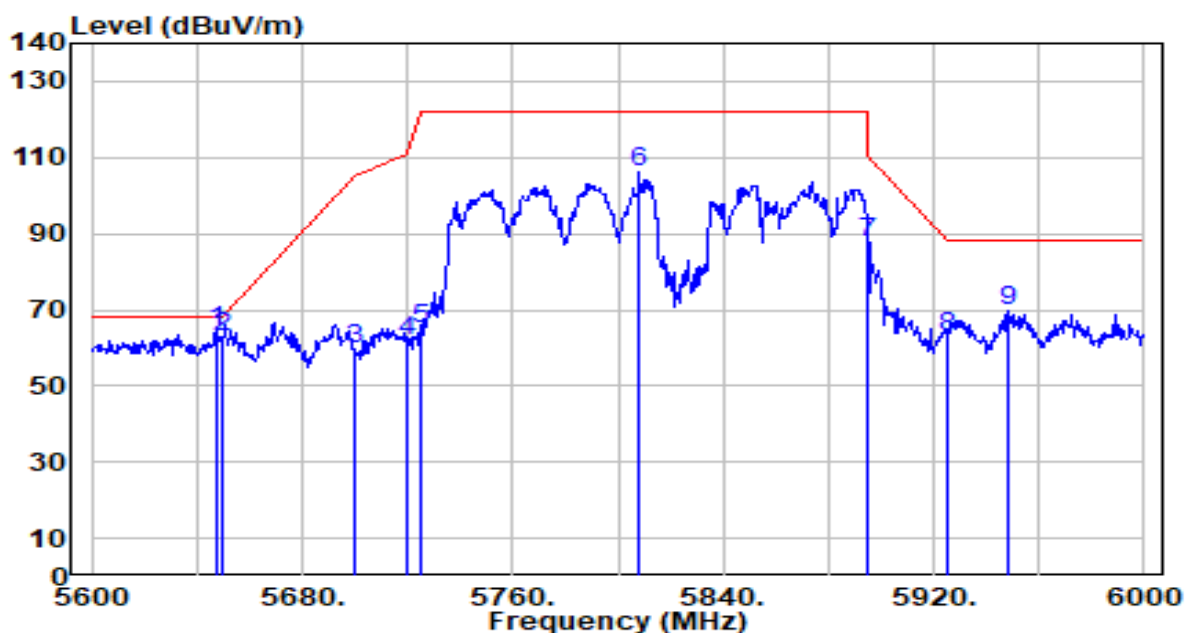


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5647.600	61.66	2.84	64.50	-3.70	68.20	220	360	Peak
2		5650.000	60.27	2.86	63.12	-5.08	68.20	220	360	Peak
3		5700.000	56.82	3.12	59.94	-45.26	105.20	220	360	Peak
4		5720.000	58.61	3.23	61.83	-48.97	110.80	220	360	Peak
5		5725.000	61.67	3.25	64.92	-57.28	122.20	220	360	Peak
6		5808.000	102.42	3.66	106.08	N/A	N/A	220	360	Peak
7		5895.000	84.01	3.60	87.61	-22.59	110.20	220	360	Peak
8		5925.000	59.22	3.59	62.82	-25.38	88.20	220	360	Peak
9		5948.000	66.29	3.59	69.88	-18.32	88.20	220	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-22
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_TX_5.9G Band_996+484+242Tone_20-PUN5_CH 163_ANT 6+7_Puncture Mode	Test Voltage	By Notebook PC

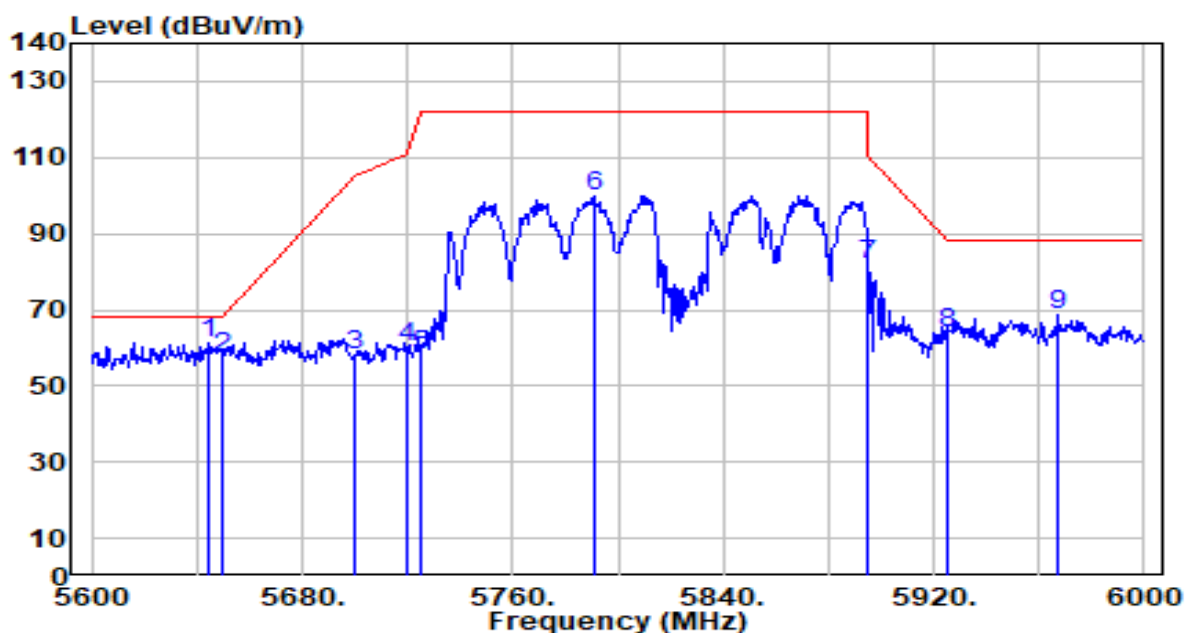


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5644.400	58.54	2.83	61.36	-6.84	68.20	132	68	Peak
2		5650.000	54.89	2.86	57.75	-10.45	68.20	132	68	Peak
3		5700.000	54.91	3.12	58.03	-47.17	105.20	132	68	Peak
4		5720.000	56.92	3.23	60.15	-50.65	110.80	132	68	Peak
5		5725.000	54.61	3.25	57.86	-64.34	122.20	132	68	Peak
6		5790.800	96.42	3.61	100.03	N/A	N/A	132	68	Peak
7		5895.000	78.40	3.60	82.00	-28.20	110.20	132	68	Peak
8		5925.000	60.47	3.59	64.06	-24.14	88.20	132	68	Peak
9		5967.200	64.89	3.59	68.47	-19.73	88.20	132	68	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-22
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_TX_5.9G Band_996+484+242Tone_20-PUN6_CH 163_ANT 6+7_Puncture Mode	Test Voltage	By Notebook PC

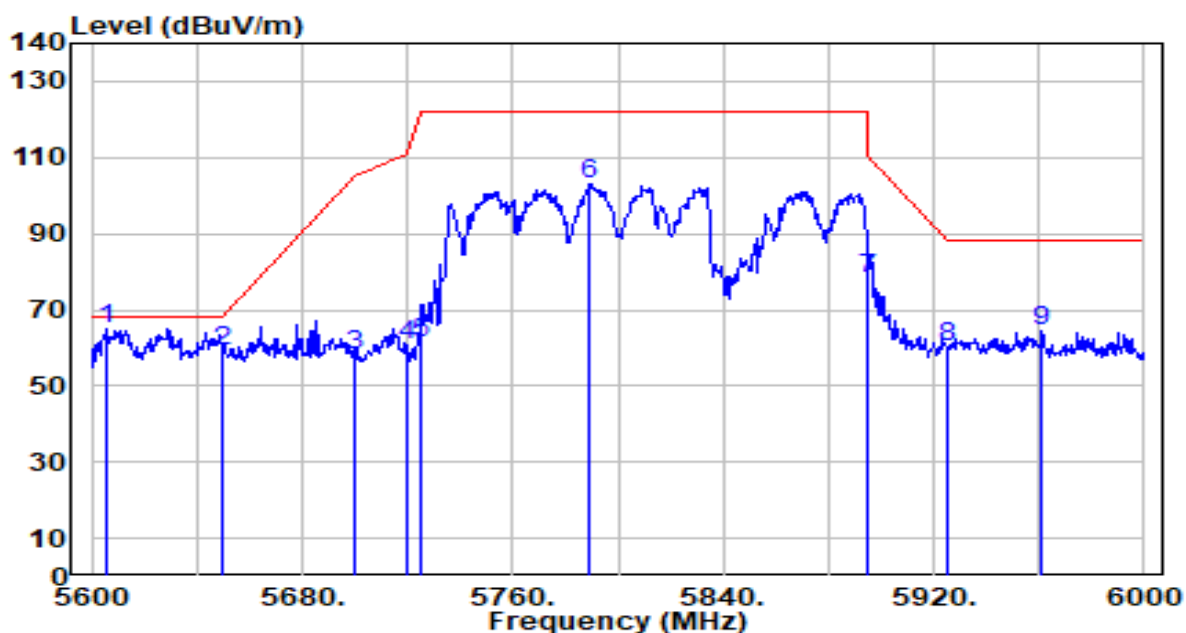


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5605.200	62.28	2.62	64.90	-3.30	68.20	220	360	Peak
2		5650.000	56.34	2.86	59.20	-9.00	68.20	220	360	Peak
3		5700.000	54.98	3.12	58.10	-47.10	105.20	220	360	Peak
4		5720.000	57.64	3.23	60.87	-49.93	110.80	220	360	Peak
5		5725.000	57.94	3.25	61.19	-61.01	122.20	220	360	Peak
6		5788.800	99.57	3.60	103.17	N/A	N/A	220	360	Peak
7		5895.000	74.82	3.60	78.42	-31.78	110.20	220	360	Peak
8		5925.000	56.45	3.59	60.04	-28.16	88.20	220	360	Peak
9		5961.200	60.90	3.59	64.49	-23.71	88.20	220	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-22
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_TX_5.9G Band_996+484+242Tone_20-PUN6_CH 163_ANT 6+7_Puncture Mode	Test Voltage	By Notebook PC

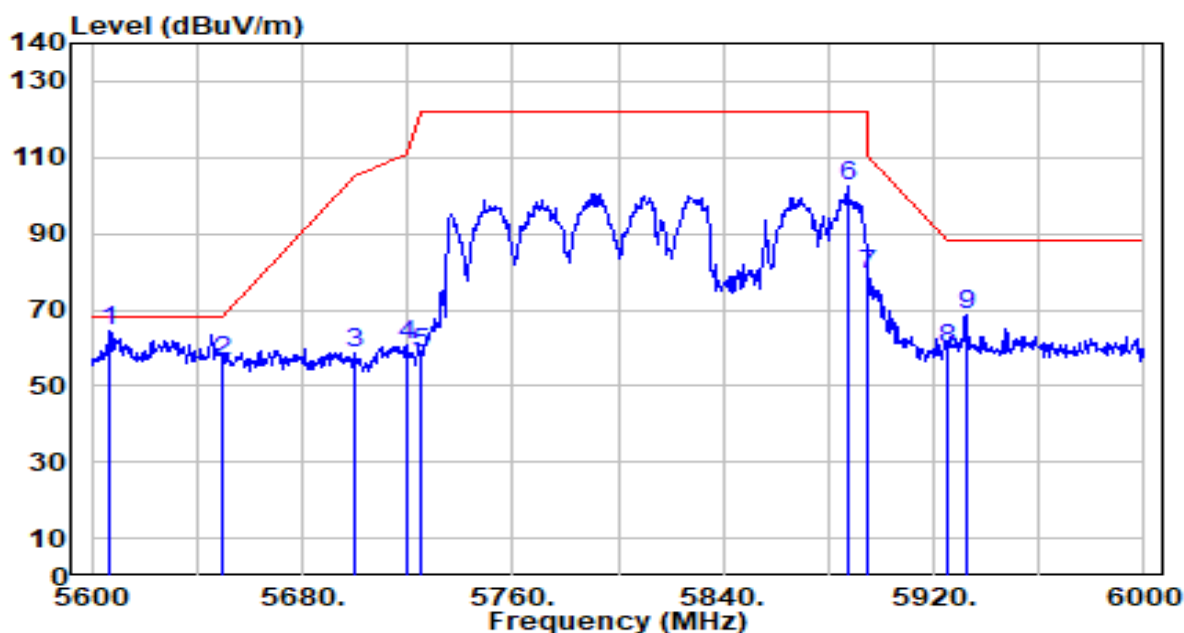


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5606.800	61.58	2.63	64.21	-3.99	68.20	132	68	Peak
2		5650.000	53.54	2.86	56.40	-11.80	68.20	132	68	Peak
3		5700.000	55.34	3.12	58.46	-46.74	105.20	132	68	Peak
4		5720.000	57.31	3.23	60.53	-50.27	110.80	132	68	Peak
5		5725.000	55.16	3.25	58.41	-63.79	122.20	132	68	Peak
6		5887.200	98.73	3.60	102.33	N/A	N/A	132	68	Peak
7		5895.000	75.61	3.60	79.21	-30.99	110.20	132	68	Peak
8		5925.000	56.13	3.59	59.72	-28.48	88.20	132	68	Peak
9		5932.400	65.22	3.59	68.81	-19.39	88.20	132	68	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-22
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_TX_5.9G Band_996+484+242Tone_20-PUN7_CH 163_ANT 6+7_Puncture Mode	Test Voltage	By Notebook PC

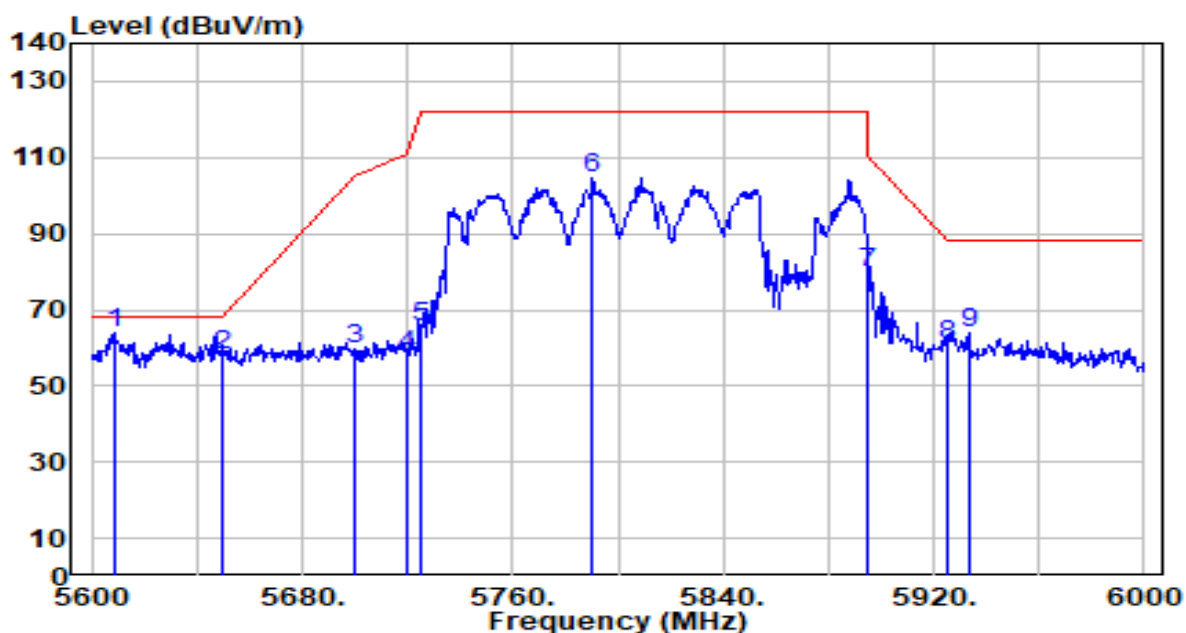


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5608.800	61.42	2.64	64.06	-4.14	68.20	220	360	Peak
2		5650.000	55.43	2.86	58.29	-9.91	68.20	220	360	Peak
3		5700.000	56.45	3.12	59.57	-45.63	105.20	220	360	Peak
4		5720.000	54.71	3.23	57.94	-52.86	110.80	220	360	Peak
5		5725.000	62.46	3.25	65.71	-56.49	122.20	220	360	Peak
6		5790.400	100.98	3.61	104.59	N/A	N/A	220	360	Peak
7		5895.000	76.27	3.60	79.87	-30.33	110.20	220	360	Peak
8		5925.000	56.96	3.59	60.56	-27.64	88.20	220	360	Peak
9		5933.200	60.51	3.59	64.10	-24.10	88.20	220	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-22
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_TX_5.9G Band_996+484+242Tone_20-PUN7_CH 163_ANT 6+7_Puncture Mode	Test Voltage	By Notebook PC

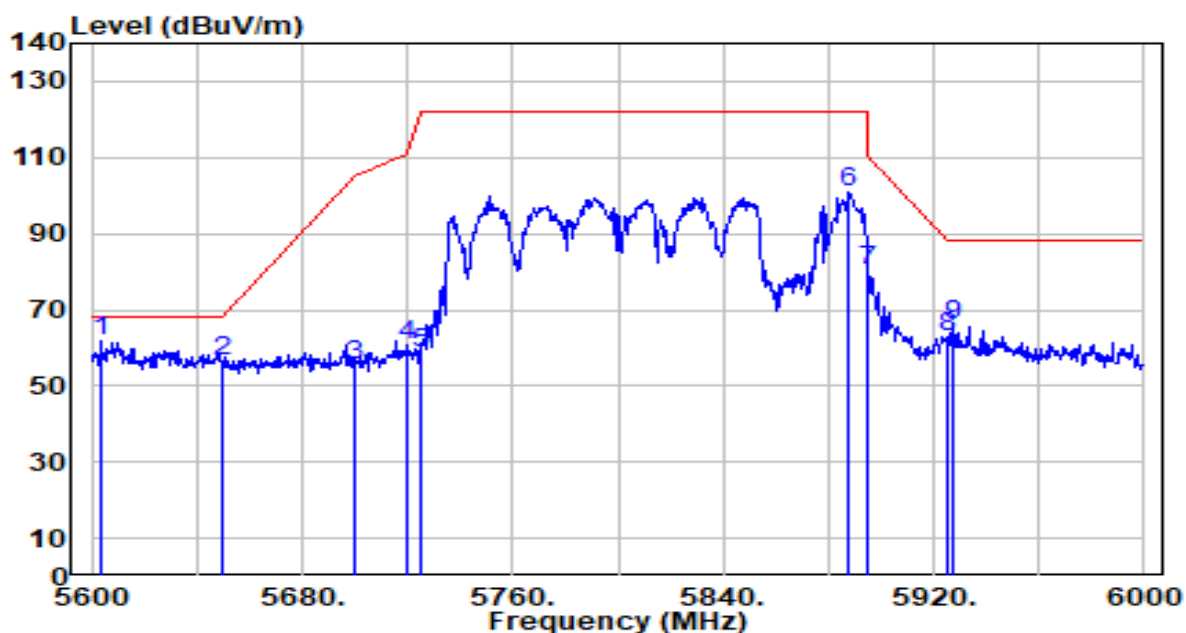

No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5603.600	59.04	2.61	61.66	-6.54	68.20	132	68	Peak
2		5650.000	53.70	2.86	56.55	-11.65	68.20	132	68	Peak
3		5700.000	52.21	3.12	55.33	-49.87	105.20	132	68	Peak
4		5720.000	57.61	3.23	60.84	-49.96	110.80	132	68	Peak
5		5725.000	55.39	3.25	58.64	-63.56	122.20	132	68	Peak
6		5888.000	97.08	3.60	100.68	N/A	N/A	132	68	Peak
7		5895.000	76.67	3.60	80.27	-29.93	110.20	132	68	Peak
8		5925.000	59.50	3.59	63.10	-25.10	88.20	132	68	Peak
9		5927.600	62.19	3.59	65.78	-22.42	88.20	132	68	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.9. AC Conducted Emissions Measurement

7.9.1. Test Limit

FCC Part 15.207 Limits		
Frequency (MHz)	QP (dBμV)	AV (dBμV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.


7.9.2. Test Procedure

The EUT was setup according to ANSI C63.4, 2009 and tested according to KDB 789033 for compliance to FCC 47CFR 15.247 requirements. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs) Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.

The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.


Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

7.9.3. Test Setup

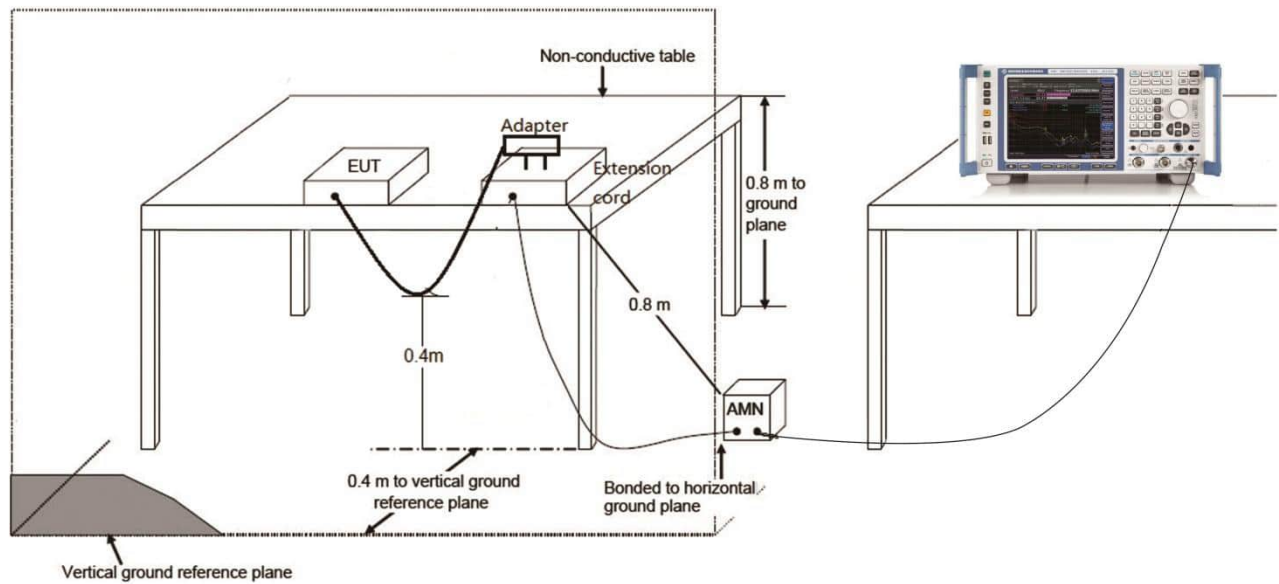

7.9.4. Test Result

EUT	Mobile Computer	Date of Test	2025-07-15
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	24°C /54%
Polarity	Line1	Site / Test Engineer	SR2 / Ryan
Test Mode	802.11ac-20MHz_TX_5.9G Band_CH 173_ANT 6+7	Test Voltage	AC 120V/60Hz

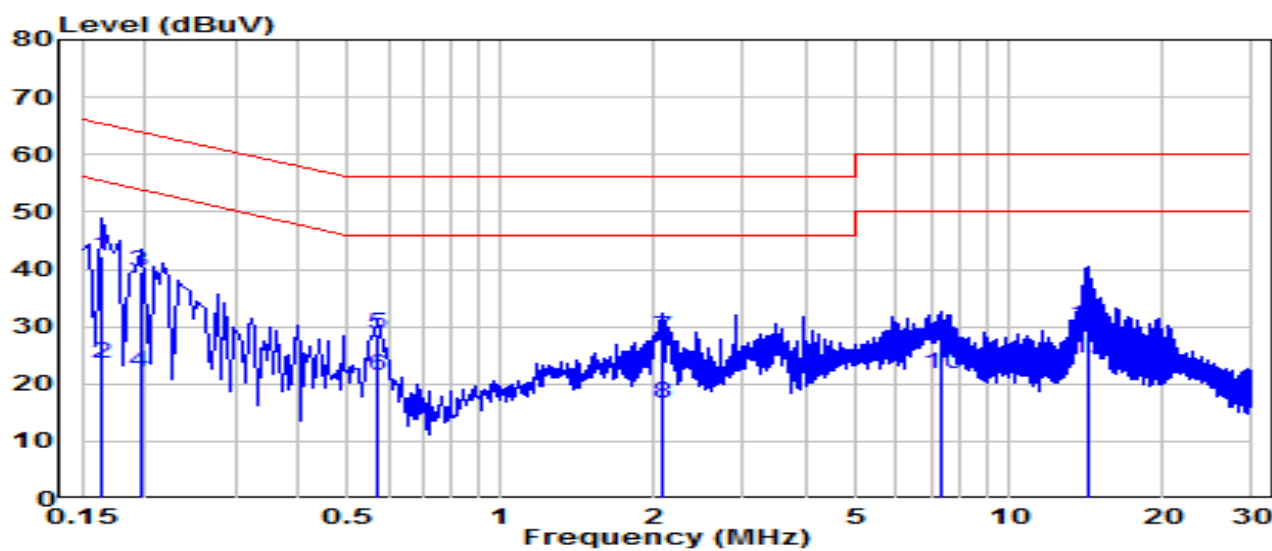


No		Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV)	Margin (dB)	Limit (dBUV)	Remark (QP/PK/AV)
1	*	0.163	32.65	9.63	42.28	-23.00	65.28	QP
2	*	0.163	13.83	9.63	23.45	-31.83	55.28	Average
3		0.195	29.96	9.62	39.59	-24.24	63.82	QP
4		0.195	12.35	9.62	21.97	-31.85	53.82	Average
5		0.568	19.10	9.65	28.74	-27.26	56.00	QP
6		0.568	11.86	9.65	21.50	-24.50	46.00	Average
7		2.071	18.47	9.70	28.17	-27.83	56.00	QP
8		2.071	6.88	9.70	16.58	-29.42	46.00	Average
9		7.322	17.25	9.80	27.05	-32.95	60.00	QP
10		7.322	11.96	9.80	21.76	-28.24	50.00	Average
11		14.283	20.27	9.90	30.16	-29.84	60.00	QP
12		14.283	14.69	9.90	24.58	-25.42	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV) = Reading(dBUV) + C.F (Correction Factor).

EUT	Mobile Computer	Date of Test	2025-07-15
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	24°C /54%
Polarity	Neutral	Site / Test Engineer	SR2 / Ryan
Test Mode	802.11ac-20MHz_TX_5.9G Band_CH 173_ANT 6+7	Test Voltage	AC 120V/60Hz

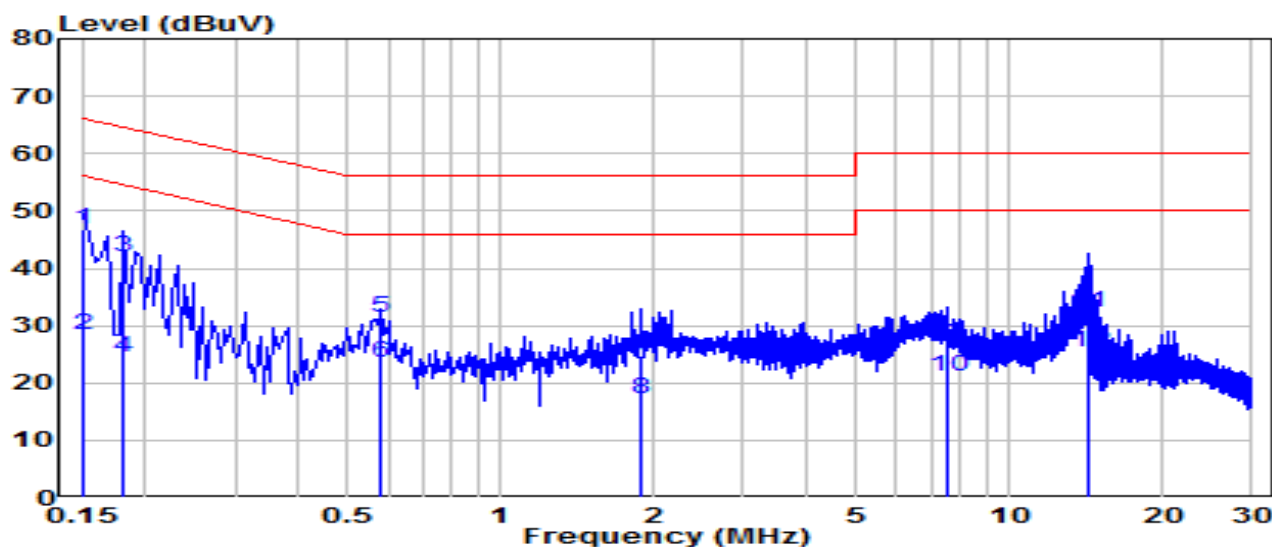

No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	*	0.150	37.30	9.63	46.93	-19.07	66.00	QP
2	*	0.150	18.65	9.63	28.28	-27.72	56.00	Average
3		0.181	32.43	9.63	42.06	-22.36	64.42	QP
4		0.181	14.91	9.63	24.54	-29.88	54.42	Average
5		0.582	21.66	9.65	31.31	-24.69	56.00	QP
6		0.582	13.98	9.65	23.63	-22.37	46.00	Average
7		1.896	14.97	9.70	24.67	-31.33	56.00	QP
8		1.896	7.60	9.70	17.30	-28.70	46.00	Average
9		7.597	16.69	9.81	26.50	-33.50	60.00	QP
10		7.597	11.24	9.81	21.05	-28.95	50.00	Average
11		14.301	22.47	9.91	32.38	-27.62	60.00	QP
12		14.301	15.59	9.91	25.50	-24.50	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

8. CONCLUSION

The data collected relate only the item(s) tested and show that the device is in compliance with Part 15E of the FCC Rules.

Appendix A : Test Setup Photograph

Refer to “2505TW0108-UT” file.

Appendix B : EUT Photograph

Refer to “2505TW0108-UE” file.

Appendix C : Internal Photograph

Refer to “2505TW0108-UI” file.

_____ The End _____