



MRT Technology (Taiwan) Co., Ltd
Phone: +886-3-3288388
Fax: +886-3-3288918
Web: www.mrt-cert.com

Report No.: 2505TW0108-U9
Report Version: 1.0
Issue Date: 2025-08-04

MEASUREMENT REPORT

FCC ID : HD5-CT70L0

APPLICANT : Honeywell International Inc

Application Type : Certification

Product : Mobile Computer

Model No. : CT70-L0

Brand Name : Honeywell

FCC Classification : Part 15 Low Power Communication Device
Transmitter (DXX)

FCC Rule Part(s) : Part 15.225

Test Procedure(s) : ANSI C63.10-2013

Received Date : May 12, 2025

Test Date : July 15, 2025~July 21, 2025

Tested By : *Kaunaz Lee*
(Kaunaz Lee)



Reviewed By : *Paddy Chen*
(Paddy Chen)



Approved By : *Chenz Ker*
(Chenz Ker)

The test results only relate to the tested sample.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Taiwan) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
2505TW0108-U9	1.0	Original Report	2025-08-04	

CONTENTS

Description	Page
1. INTRODUCTION	6
1.1. Scope	6
1.2. MRT Test Location.....	6
2. PRODUCT INFORMATION	7
2.1. Equipment Description	7
2.2. Radio Specification under Test	8
2.3. Test Mode.....	8
2.4. Test Software.....	8
2.5. Test Configuration.....	9
2.6. Test System Details	10
2.7. EMI Suppression Device(s)/Modifications.....	10
2.8. Labeling Requirements.....	10
3. DESCRIPTION of TEST	11
3.1. Evaluation Procedure	11
3.2. AC Line Conducted Emissions	11
3.3. Radiated Emissions.....	12
4. ANTENNA REQUIREMENTS	13
5. TEST EQUIPMENT CALIBRATION DATE	14
6. MEASUREMENT UNCERTAINTY	15
7. TEST RESULT	16
7.1. Summary.....	16
7.2. Field Strength of Fundamental Emissions Measurement.....	17
7.2.1. Test Limit	17
7.2.2. Test Procedure used.....	17
7.2.3. Test Setup	18
7.2.4. Test Result.....	19
7.3. Radiated Spurious Emissions Measurement	27
7.3.1. Test Limit	27
7.3.2. Test Procedure Used	27
7.3.3. Test Setup	29
7.3.4. Test Result.....	30
7.4. 20dB Bandwidth Measurement.....	36
7.4.1. Test Limit	36

7.4.2. Test Procedure Used	36
7.4.3. Test Setting.....	36
7.4.4. Test Setup	36
7.4.5. Test Result.....	37
7.5. Frequency Stability Measurement	38
7.5.1. Test Limit	38
7.5.2. Test Procedure Used	38
7.5.3. Test Setup	39
7.5.4. Test Result.....	40
7.6. AC Conducted Emissions Measurement	41
7.6.1. Test Limit	41
7.6.2. Test Setup	41
7.6.3. Test Result.....	42
8. CONCLUSION	44
Appendix A : Test Photograph.....	45
Appendix B : External Photograph.....	45
Appendix C : Internal Photograph.....	45

General Information

Applicant	Honeywell International Inc
Applicant Address	9680 Old Bailes Rd. Fort Mill, SC 29707 United States
Manufacturer	Honeywell International Inc
Manufacturer Address	9680 Old Bailes Rd. Fort Mill, SC 29707 United States
Test Site	MRT Technology (Taiwan) Co., Ltd
Test Site Address	No. 38, Fuxing Second Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C)
MRT FCC Registration No.	291082
FCC Rule Part(s)	Part 15.225

Test Facility / Accreditations

1. MRT facility is a FCC registered (Reg. No. 291082) test facility with the site description report on file and is designated by the FCC as an Accredited Test Firm.
2. MRT facility is an IC registered (MRT Reg. No. 21723) test laboratory with the site description on file at Industry Canada.
3. MRT Lab is accredited to ISO 17025 by the Taiwan Accreditation Foundation (TAF Cert. No. 3261) in EMC, Telecommunications and Radio testing for FCC (Designation Number: TW3261), Industry Canada, EU and TELEC Rules.


1. INTRODUCTION

1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taoyuan City. These measurement tests were conducted at the MRT Technology (Taiwan) Co., Ltd. Facility located at No.38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 33377, Taiwan (R.O.C).

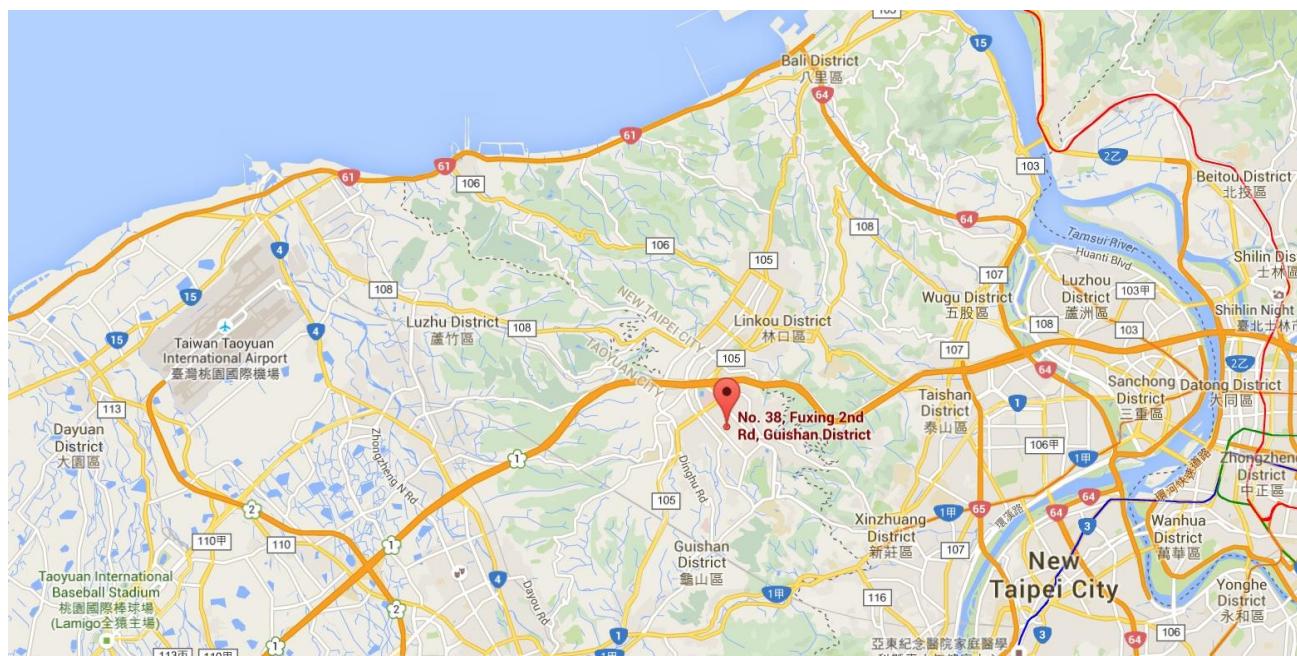

2. PRODUCT INFORMATION

2.1. Equipment Description

Product Name	Mobile Computer
Model No.	CT70-L0
Brand Name	Honeywell
Wi-Fi Specification	802.11a/b/g/n/ac/ax/be
Bluetooth Specification	Main BT/BLE : V6.0 dual mode + 2 nd BLE: V5.3 Single mode
NFC Specification	13.56MHz
EUT Identification No.:	#25163E0040(Radiated)
Accessory	
Standard Battery	Brand: Honeywell MODEL: CT70-BTSC Rating: 3.87Vdc, 4720mAh, 18.27Wh
Extend Battery	Brand: Honeywell MODEL: CT70-BTEC Rating: 3.87Vdc, 7570mAh, 29.3Wh
WPC Battery	Brand: Honeywell MODEL: CT70-BTWC Rating: 3.87Vdc, 4720mAh, 18.27Wh

Note:

1. For other features of this EUT, test report will be issued separately.
2. This product has 2 scanners, can refer as below:

Scanner	S0703	S0803FR	--	--	--
---------	-------	---------	----	----	----

3. This report used S0703 scanner as the main test.

2.2. Radio Specification under Test

Operating Frequency	13.56MHz
Type of modulation	ASK (Type A / Type B/ Type F/ Type V)
Antenna Type	Loop Antenna

2.3. Test Mode

Test Mode	Mode 1: TX- NFC 13.56MHz_Type A Mode 2: TX- NFC 13.56MHz_Type B Mode 3: TX- NFC 13.56MHz_Type F Mode 4: TX- NFC 13.56MHz_Type V
-----------	--

Note: Output power test was verified over all each mode, and then choose the maximum power output (Type V) for final test.

2.4. Test Software

NfcFactoryTestApp

2.5. Test Configuration

The **Mobile Computer**, ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing.

Connection Diagram		
<pre>graph LR; EUT[EUT] --- A((A)); A --- NP1[Notebook PC (1)]; NP1 --- B((B)); B --- UM[USB Mouse (2)]</pre>		
Signal Cable Type	Signal Cable Description	
A	USB Type C Cable	Shielded, 1.0m
B	USB Mouse Cable	Shielded, 1.8m

2.6. Test System Details

The types for all equipments, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product	Manufacturer	Model No.	Serial No.	Power Cord
1	Notebook PC	Lenovo	V14 G3 ABA	N/A
2	USB Mouse	Logitech	M90	N/A

2.7. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

2.8. Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase.

However, when the device is so small wherein placement of the label with specified statement is not practical, only the FCC ID must be displayed on the device per Section 15.19(a)(5). Please see attachment for FCC ID label and label location.

3. DESCRIPTION of TEST

3.1. Evaluation Procedure

The measurement procedures described in the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2013) were used in the measurement of the **Mobile Computer**.

Deviation from measurement procedure..... **None**

3.2. AC Line Conducted Emissions

The line-conducted facility is located inside an 9'x4'x3' shielded enclosure. A 1m x 2m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50uH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground-plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the receiver and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The receiver was scanned from 150kHz to 30MHz. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or data exchange speed, or support equipment which determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions are used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

An extension cord was used to connect to a single LISN which powered by EUT. The extension cord was calibrated with LISN, the impedance and insertion loss are compliance with the requirements as stated in ANSI C63.10-2013.

Line conducted emissions test results are shown in Section 7.6.

3.3. Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. A MF Model 210SS turntable is used for radiated measurement. It is a continuously rotatable, remote controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm high PVC support structure is placed on top of the turntable.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up for frequencies below 1GHz was placed on top of the 0.8 meter high, 1 x 1.5 meter table; and test set-up for frequencies 1-40GHz was placed on top of the 1.5 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, which produced the worst-case emissions.

According to 3dB Beam-Width of horn antenna, the horn antenna should be always directed to the EUT when rising height.

Radiated Emissions test results are shown in Section 7.2 & 7.3 .

4. ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of **Mobile Computer** is **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The **Mobile Computer** unit complies with the requirement of §15.203.

5. TEST EQUIPMENT CALIBRATION DATE

Conducted Emissions

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Two-Line V-Network	R&S	ENV216	MRTTWA00020	1 year	2026/4/14
EMI Test Receiver	R&S	ESR3	MRTTWA00009	1 year	2026/3/4
Cable	Rosnol	N1C50-RG400-B 1C50-500CM	MRTTWE00013	1 year	2026/6/13

Radiated Emissions

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Active Loop Antenna	SCHWARZBECK	FMZB 1519B	MRTTWA00002	1 year	2026/4/16
Broadband TRILOG Antenna	SCHWARZBECK	VULB 9162	MRTTWA00086	1 year	2025/11/5
Broadband Hornantenna	SCHWARZBECK	BBHA 9120D	MRTTWA00003	1 year	2026/2/11
Broadband Preamplifier	SCHWARZBECK	BBV 9718	MRTTWA00005	1 year	2026/2/11
Breitband Hornantenna	SCHWARZBECK	BBHA 9170	MRTTWA00004	1 year	2026/3/27
Broadband Amplifier	SCHWARZBECK	BBV 9721	MRTTWA00006	1 year	2026/3/20
EMI Test Receiver	R&S	ESR3	MRTTWA00009	1 year	2026/3/4
Signal Analyzer	R&S	FSV40	MRTTWA00007	1 year	2026/5/20
Antenna Cable	HUBERSUHNER	SF106	MRTTWE00010	1 year	2026/6/13
Cable	Rosnol	K1K50-UP0264- K1K50-4M	MRTTWE00012	1 year	2026/6/13
Temperature/Humidity Meter	TFA	35.1083	MRTTWA00032	1 year	2026/6/5

Conducted Test Equipment

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EXA Signal Analyzer	KEYSIGHT	N9010A	MRTTWA00012	1 year	2025/9/24
EXA Signal Analyzer	KEYSIGHT	N9010B	MRTTWA00074	1 year	2026/7/14
USB Wideband Power Sensor	KEYSIGHT	U2021XA	MRTTWA00015	1 year	2026/3/11

Test Software

Software	Version	Function
e3	9.160520a	EMI Test Software

6. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

Conducted Emission- Power Line
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_{c(y)}$): 0.15MHz~30MHz: ± 2.53 dB
Conducted Measurement
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_{c(y)}$): ± 1.3 dB
Radiated Spurious Emission
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_{c(y)}$): 9kHz~30MHz: ± 3.92 dB 30MHz~1GHz: ± 4.25 dB 1GHz~18GHz: ± 4.40 dB 18GHz~40GHz: ± 4.45 dB

7. TEST RESULT

7.1. Summary

Product Name: Mobile Computer

FCC Classification: (DXX) Part 15 Low Power Communication Device Transmitter

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.225 (a)(b)(c)	Field Strength of Fundamental Emissions	FCC 15.225 limits	Radiated	Pass (62.15dBuV@Peak)	Section 7.2
15.225(d)	Radiated Spurious Emissions	FCC 15.209 limits		Pass (38.61dBuV/m @QP)	Section 7.3
15.215(c)	20dB Bandwidth	N/A	Conducted	Pass	Section 7.4
15.225(e)	Frequency Stability	within $\pm 0.01\%$ of the operating frequency		Pass	Section 7.5
15.207	AC Conducted Emissions 150kHz - 30MHz	FCC 15.207 limits	Line Conducted	Pass	Section 7.6

Notes:

- 1) Determining compliance is based on the test results met the regulation limits or requirements declared by clients, and the test results don't take into account the value of measurement uncertainty.
- 2) All modes of operation and data rates were investigated. For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst case emissions.
- 3) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 4) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.

7.2. Field Strength of Fundamental Emissions Measurement

7.2.1. Test Limit

FCC Part 15.225 Limits				
Frequency (MHz)	Field Strength (μ V/m) at 30m	Field Strength (dB μ V/m) at 30m	Field Strength (dB μ V/m) at 10m	Field Strength (dB μ V/m) at 3m
1.705 – 13.110	30	29.5	48.58	69.5
13.110 – 13.410	106	40.5	59.98	80.5
13.410 – 13.553	334	50.5	69.58	90.5
13.553 – 13.567	15848	84	103.08	124
13.567 – 13.710	334	50.5	69.58	90.5
13.710 – 14.010	106	40.5	59.98	80.5
14.010 – 30.000	30	29.5	48.58	69.5

Note: Measurements were tested at 3m and the data was extrapolated to the specified measurement distance of 30m using the square of an inverse linear extrapolation factor (40 dB/decade) as specified in &15.31(f)(2).

7.2.2. Test Procedure used

(A) ANSI C63.10-2013 - Section 11.12.2.3 (quasi-peak measurements)

The specifications for measurements using the CISPR quasi-peak detector can be found in CISPR 16-1-1. As an alternative to CISPR quasi-peak measurement, compliance can be determined for the applicable emission requirements using a peak detector.

(B) ANSI C63.10-2013 - Section 11.12.2.4 (peak power measurements)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = as specified in Table 1
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. Allow the trace was allowed to stabilize

Table 1 - RBW as a function of frequency

Frequency	RBW
9 kHz ~ 150 kHz	200 Hz ~ 300 Hz
0.15 MHz ~ 30 MHz	9 kHz ~ 10 kHz


7.2.3. Test Setup

9kHz ~ 30MHz Test Setup:

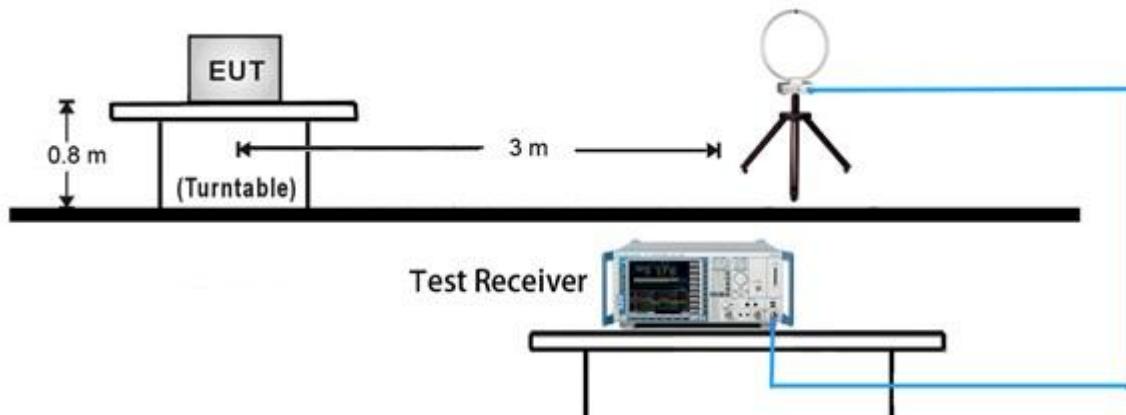

7.2.4. Test Result

EUT	Mobile Computer	Date of Test	2025-07-20
Factor	FMZB 1519B	Temp. / Humidity	25°C /66%
Polarity	Face On	Site / Test Engineer	AC1 / Todd
Test Mode	TX-NFC 13.56MHz_Type A	Test Voltage	By Notebook PC

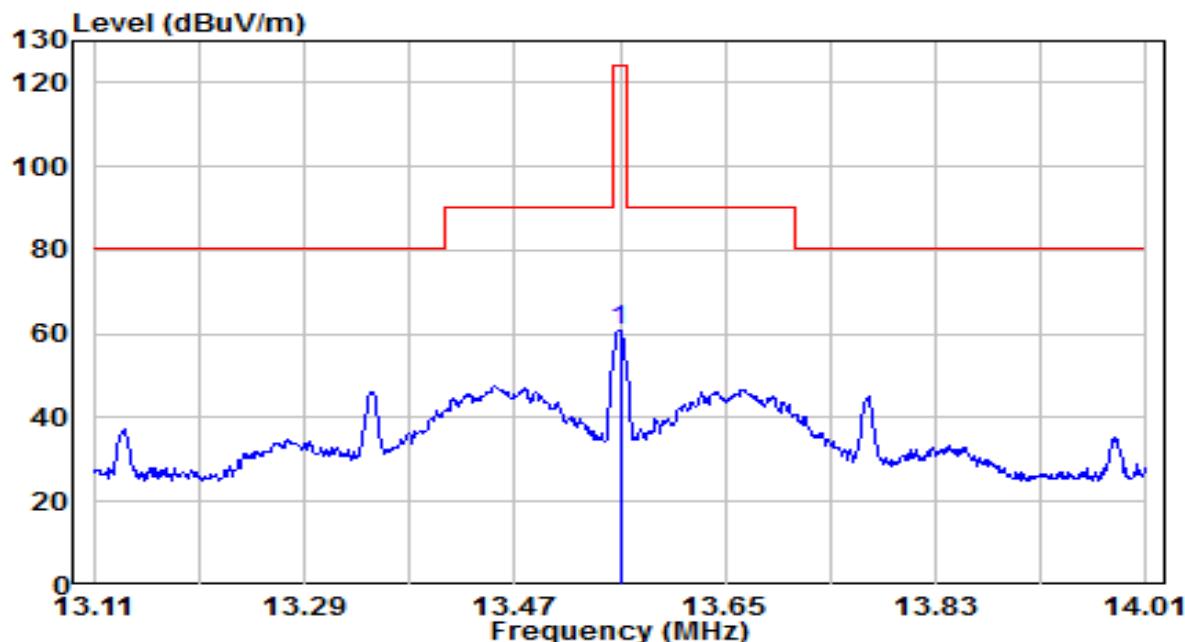


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 13.560	39.42	21.46	60.88	-63.12	124.00	100	155	Peak

Note:

1. "*" means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-20
Factor	FMZB 1519B	Temp. / Humidity	25°C /66%
Polarity	Face Off	Site / Test Engineer	AC1 / Todd
Test Mode	TX-NFC 13.56MHz_Type A	Test Voltage	By Notebook PC

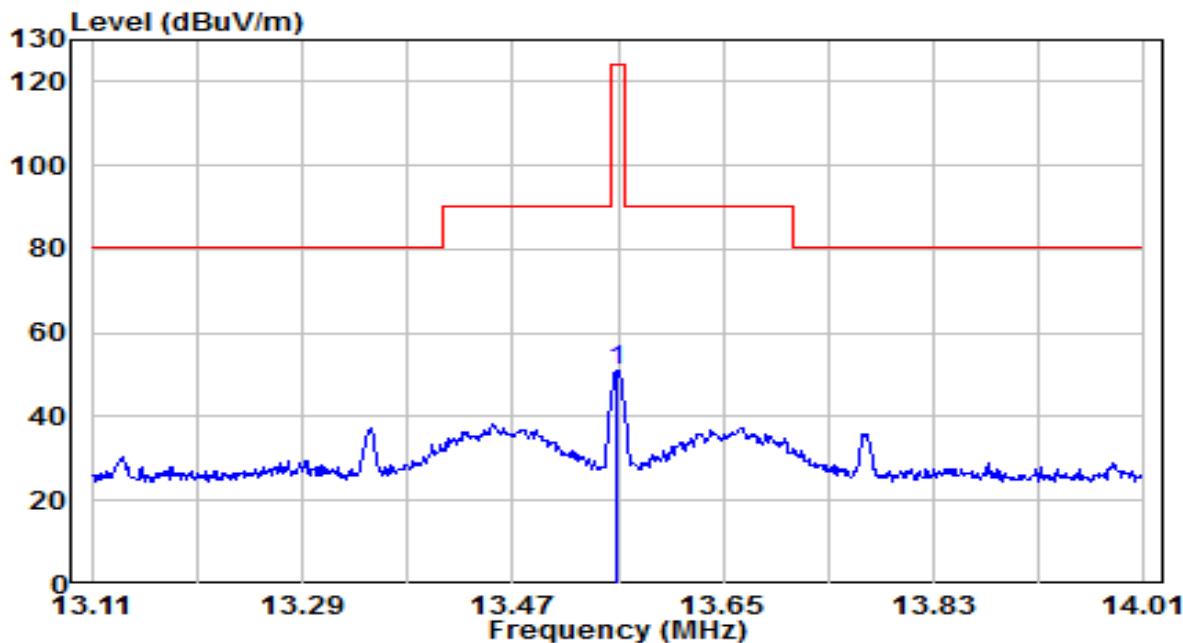


No	Frequency (MHz)	Reading (dB _u V)	C.F (dB/m)	Measurement (dB _u V/m)	Margin (dB)	Limit (dB _u V/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1 *	13.559	29.61	21.46	51.07	-72.93	124.00	100	177	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dB_uV/m) = Reading(dB_uV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-20
Factor	FMZB 1519B	Temp. / Humidity	25°C /66%
Polarity	Face On	Site / Test Engineer	AC1 / Todd
Test Mode	TX-NFC 13.56MHz_Type B	Test Voltage	By Notebook PC

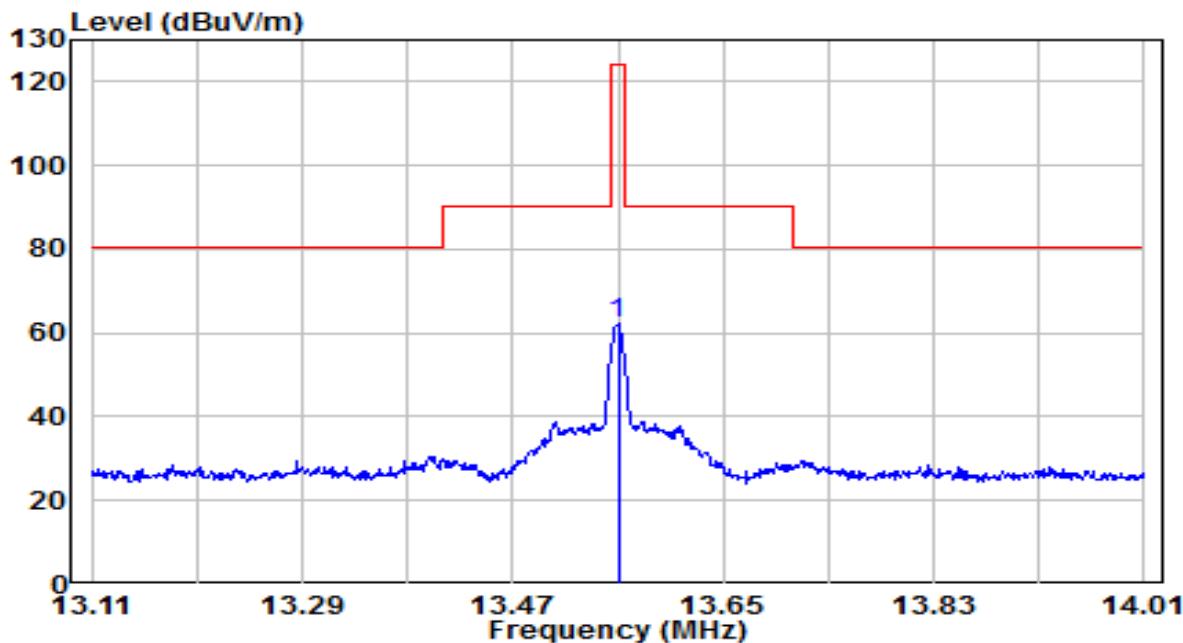


No	Frequency (MHz)	Reading (dB _{UV})	C.F (dB/m)	Measurement (dB _{UV} /m)	Margin (dB)	Limit (dB _{UV} /m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1 *	13.560	40.64	21.46	62.10	-61.90	124.00	100	254	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dB_{UV}/m) = Reading(dB_{UV}) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-20
Factor	FMZB 1519B	Temp. / Humidity	25°C /66%
Polarity	Face off	Site / Test Engineer	AC1 / Todd
Test Mode	TX-NFC 13.56MHz_Type B	Test Voltage	By Notebook PC

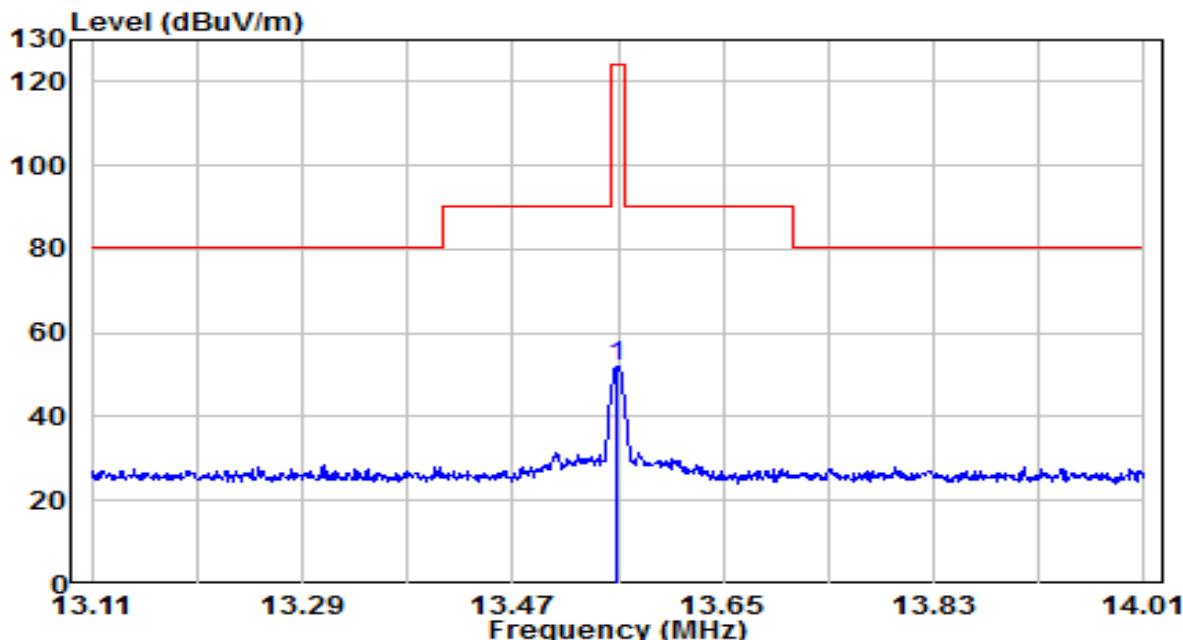


No	Frequency (MHz)	Reading (dB _{BuV})	C.F (dB/m)	Measurement (dB _{BuV/m})	Margin (dB)	Limit (dB _{BuV/m})	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1 *	13.559	30.76	21.46	52.23	-71.77	124.00	100	65	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dB_{BuV/m}) = Reading(dB_{BuV}) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-20
Factor	FMZB 1519B	Temp. / Humidity	25°C /66%
Polarity	Face On	Site / Test Engineer	AC1 / Todd
Test Mode	TX-NFC 13.56MHz_Type F	Test Voltage	By Notebook PC

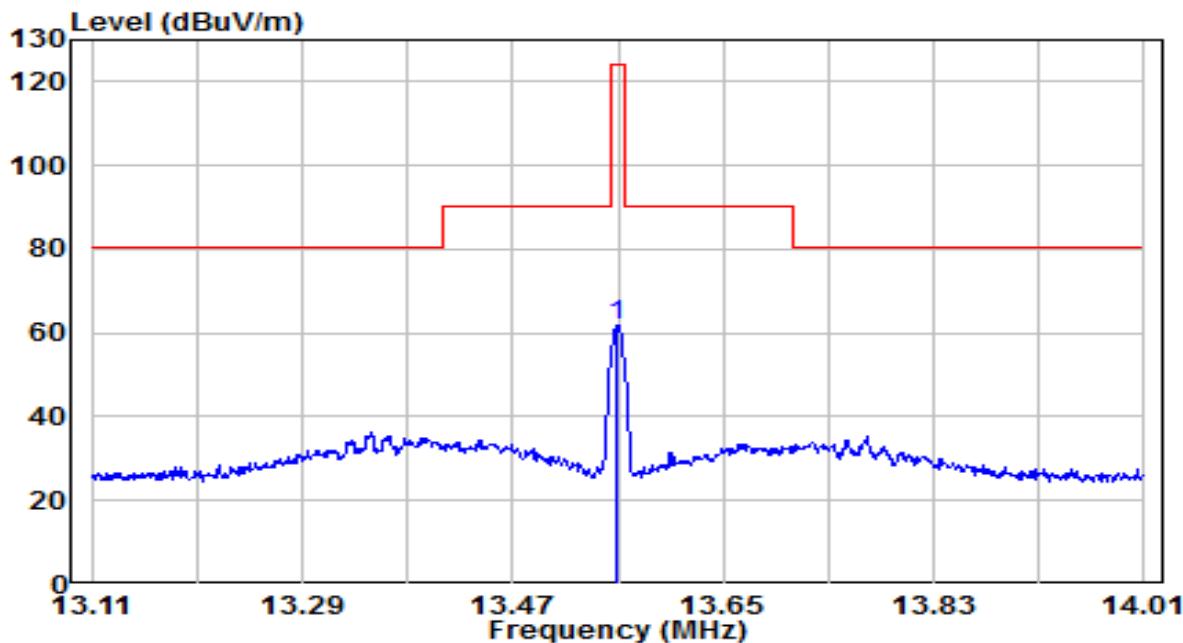


No	Frequency (MHz)	Reading (dB _{BuV})	C.F (dB/m)	Measurement (dB _{BuV/m})	Margin (dB)	Limit (dB _{BuV/m})	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1 *	13.559	40.23	21.46	61.69	-62.31	124.00	100	165	Peak

Note:

1. "*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dB_{BuV/m}) = Reading(dB_{BuV}) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-20
Factor	FMZB 1519B	Temp. / Humidity	25°C /66%
Polarity	Face Off	Site / Test Engineer	AC1 / Todd
Test Mode	TX-NFC 13.56MHz_Type F	Test Voltage	By Notebook PC

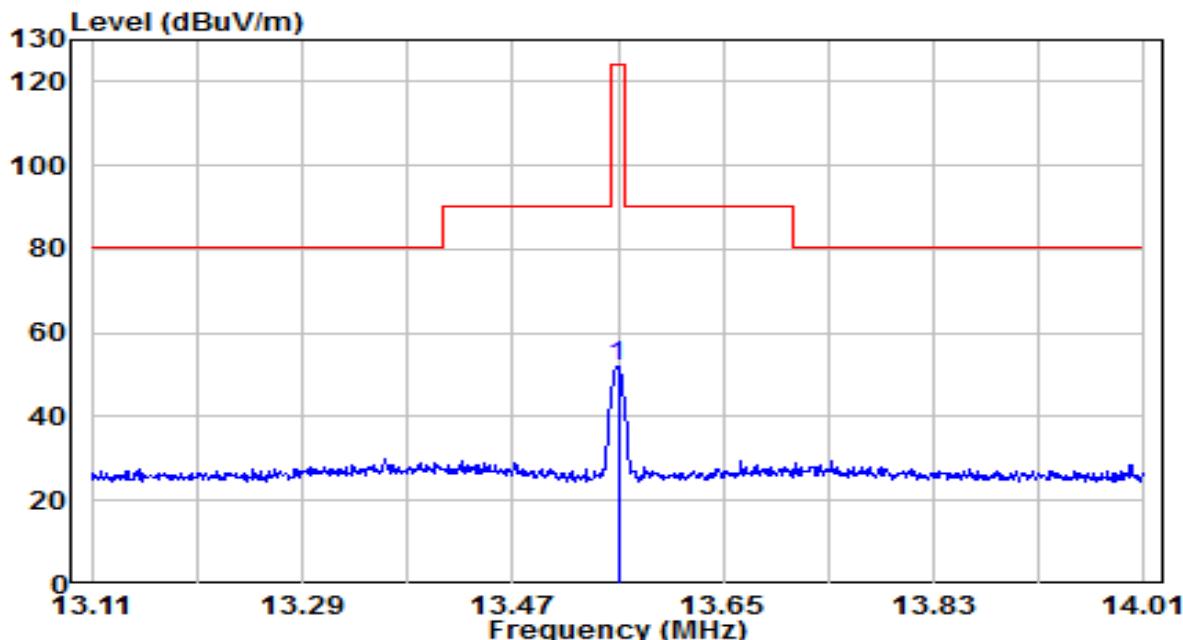


No	Frequency (MHz)	Reading (dB _{UV})	C.F (dB/m)	Measurement (dB _{UV} /m)	Margin (dB)	Limit (dB _{UV} /m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1 *	13.560	30.58	21.46	52.04	-71.96	124.00	100	122	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dB_{UV}/m) = Reading(dB_{UV}) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-20
Factor	FMZB 1519B	Temp. / Humidity	25°C /66%
Polarity	Face On	Site / Test Engineer	AC1 / Todd
Test Mode	TX-NFC 13.56MHz_Type V	Test Voltage	By Notebook PC

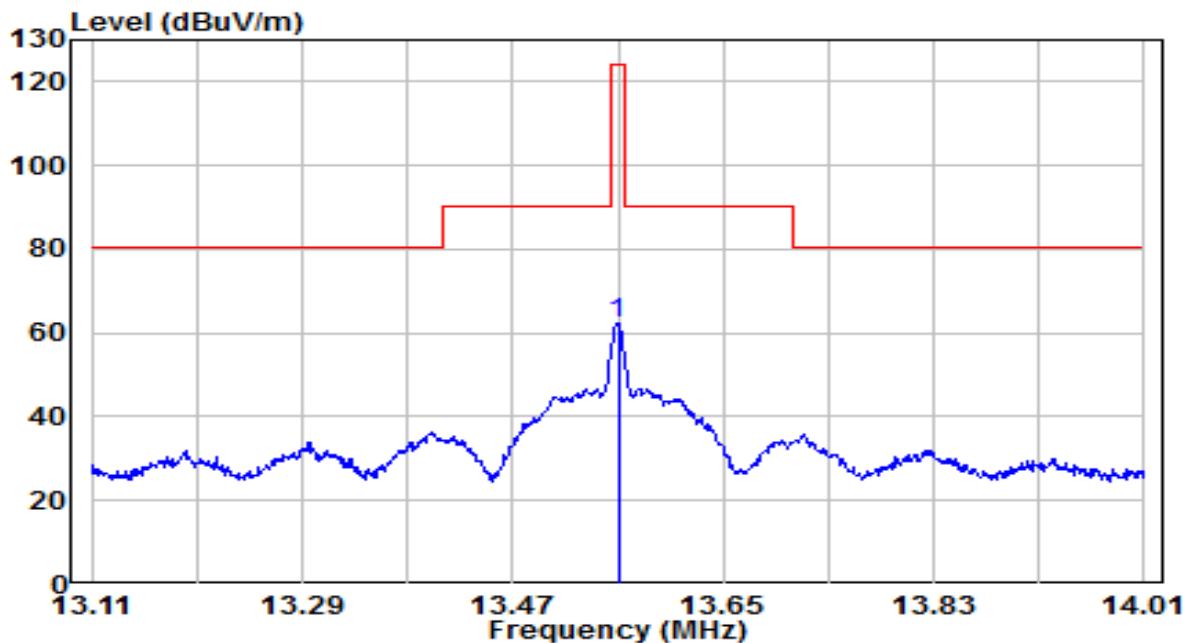


No	Frequency (MHz)	Reading (dB _{uV})	C.F (dB/m)	Measurement (dB _{uV/m})	Margin (dB)	Limit (dB _{uV/m})	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1 *	13.560	40.69	21.46	62.15	-61.85	124.00	100	233	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dB_{uV/m}) = Reading(dB_{uV}) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-20
Factor	FMZB 1519B	Temp. / Humidity	25°C /66%
Polarity	Face Off	Site / Test Engineer	AC1 / Todd
Test Mode	TX-NFC 13.56MHz_Type V	Test Voltage	By Notebook PC

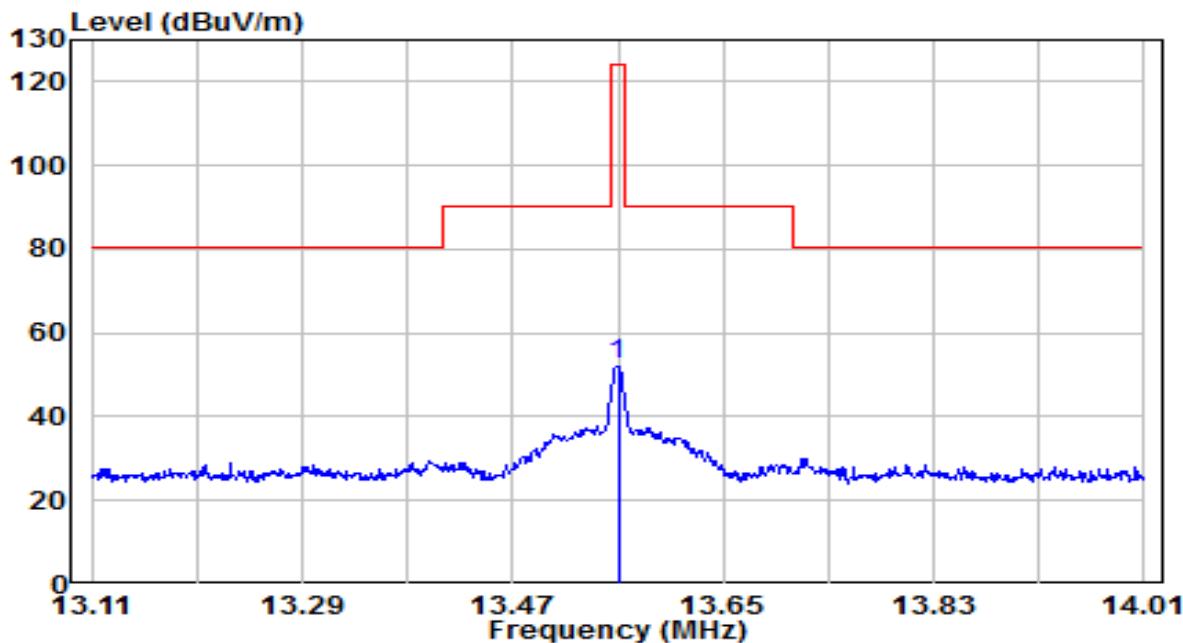

No	Frequency (MHz)	Reading (dB _{uV})	C.F (dB/m)	Measurement (dB _{uV/m})	Margin (dB)	Limit (dB _{uV/m})	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1 *	13.560	30.80	21.46	52.26	-71.74	124.00	100	140	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dB_{uV/m}) = Reading(dB_{uV}) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.3. Radiated Spurious Emissions Measurement

7.3.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.225 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [V/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note : The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

7.3.2. Test Procedure Used

(A) ANSI C63.10-2013 - Section 11.12.2.3 (quasi-peak measurements)

The specifications for measurements using the CISPR quasi-peak detector can be found in CISPR 16-1-1. As an alternative to CISPR quasi-peak measurement, compliance can be determined for the applicable emission requirements using a peak detector.

(B) ANSI C63.10-2013 - Section 11.12.2.4 (peak power measurements)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = as specified in Table 1
3. VBW = $3 \times$ RBW
4. Detector = peak
5. Sweep time = auto couple

Table 1 - RBW as a function of frequency

Frequency	RBW
9 kHz ~ 150 kHz	200 Hz ~ 300 Hz
0.15 MHz ~ 30 MHz	9 kHz ~ 10 kHz
30 MHz ~ 1000 MHz	100 kHz ~ 120 kHz
> 1000 MHz	1 MHz

(C) ANSI C63.10-2013 - Section 11.12.2.5 (average power measurements)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. $VBW \geq 1/T$
4. Video bandwidth mode or display mode:

1) The instrument shall be set to ensure that video filtering is applied in the power domain.

Typically, this requires setting the detector mode to RMS (power averaging) and setting the average-VBW type to power (rms).


2) As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode to accomplish this. Others have a setting for average-VBW type, which can be set to "voltage" regardless of the display mode. Detector =

Peak


5. Sweep time = auto
6. Trace mode = max hold
7. Allow max hold to run for at least 50 times (1/duty cycle) traces

7.3.3. Test Setup

9kHz ~ 30MHz Test Setup:

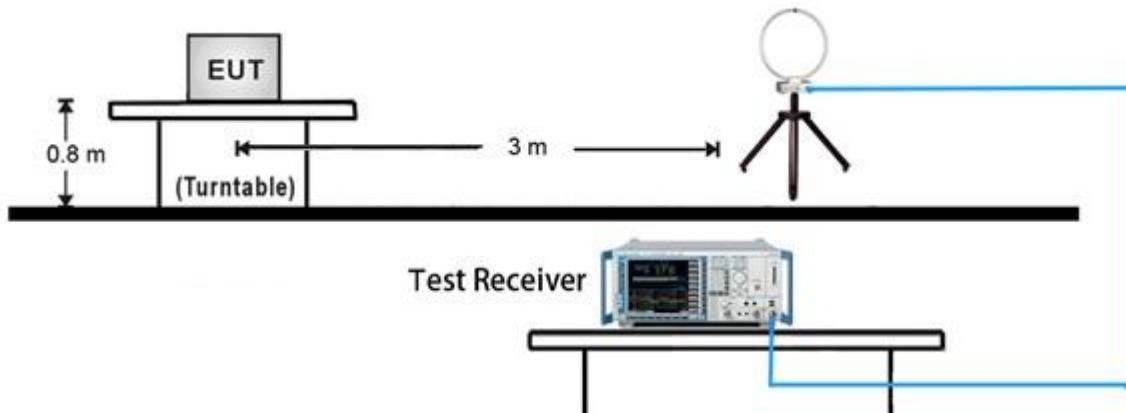


30MHz ~ 1GHz Test Setup:

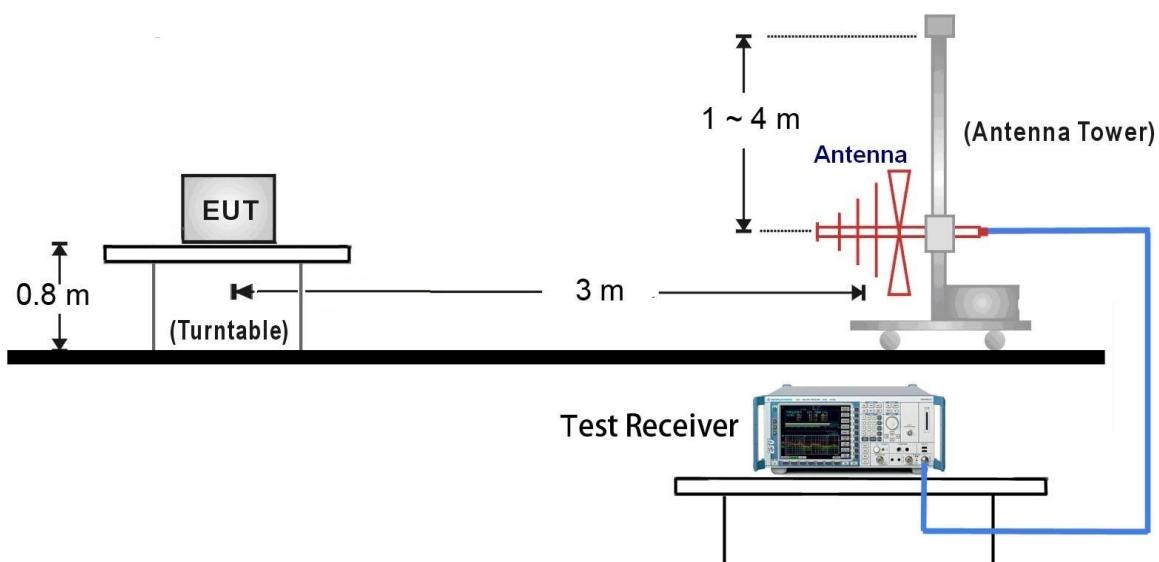

7.3.4. Test Result

EUT	Mobile Computer	Date of Test	2025-07-20
Factor	FMZB 1519B	Temp. / Humidity	25°C /66%
Polarity	Face On	Site / Test Engineer	AC1 / Todd
Test Mode	TX-NFC 13.56MHz_Type V	Test Voltage	By Notebook PC

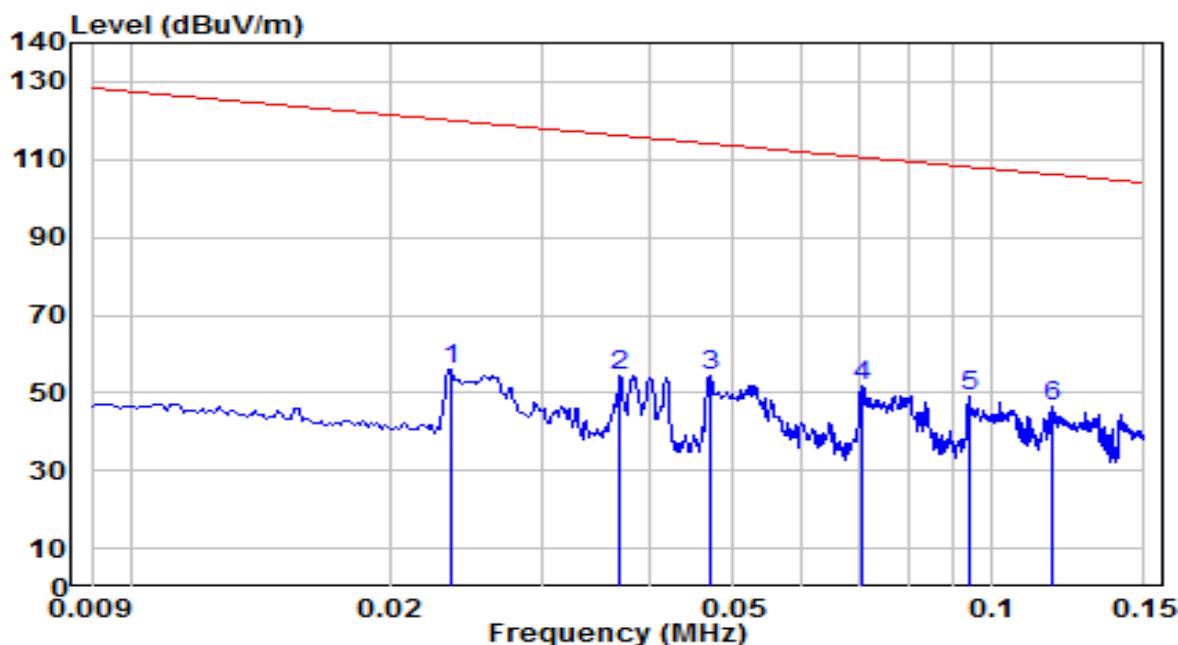


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	0.024	36.63	19.28	55.91	-64.25	120.16	100	245	Peak
2	0.037	34.95	19.43	54.38	-61.87	116.25	100	265	Peak
3	0.047	35.36	19.13	54.48	-59.66	114.14	100	0	Peak
4 *	0.070	33.08	18.63	51.71	-58.92	110.64	100	245	Peak
5	0.094	30.75	18.16	48.91	-59.23	108.13	100	245	Peak
6	0.117	28.49	18.09	46.57	-59.63	106.20	100	245	Peak

Note:

1. " **", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-20
Factor	FMZB 1519B	Temp. / Humidity	25°C /66%
Polarity	Face On	Site / Test Engineer	AC1 / Todd
Test Mode	TX-NFC 13.56MHz_Type V	Test Voltage	By Notebook PC

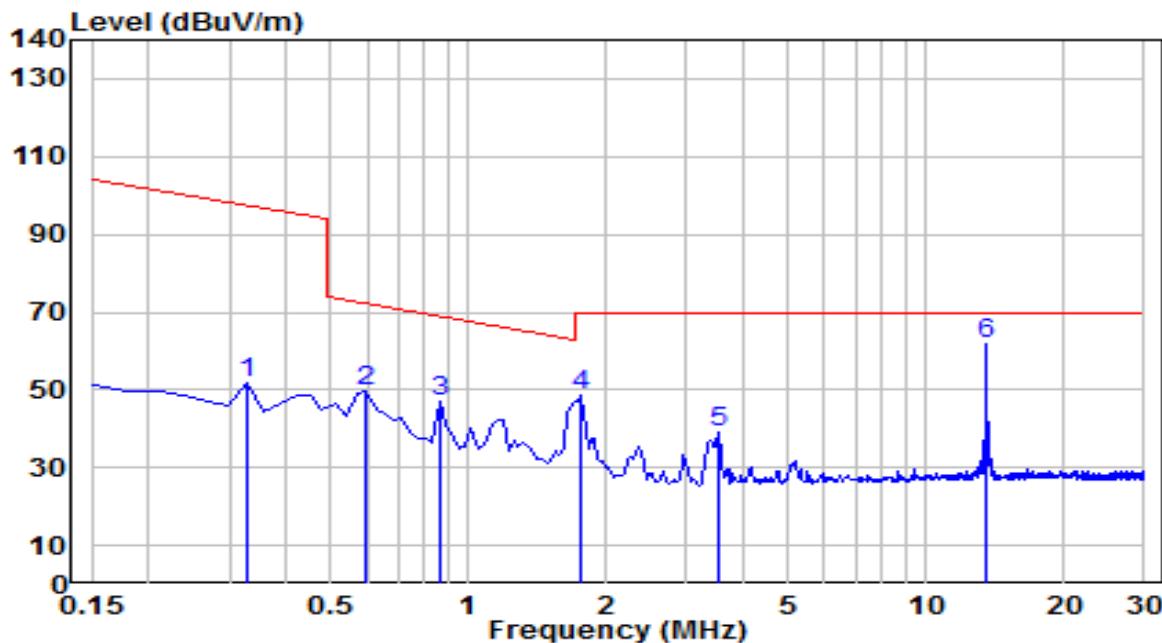


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	0.329	33.06	18.58	51.64	-45.62	97.26	100	285	Peak
2	0.598	30.74	18.66	49.40	-22.67	72.08	100	220	Peak
3	0.866	28.61	18.62	47.23	-21.63	68.86	100	320	Peak
4	1.762	30.20	18.64	48.84	-20.66	69.50	100	285	Peak
5	3.523	20.12	18.85	38.97	-30.53	69.50	100	285	Peak
6 *	13.553	40.55	21.46	62.02	-7.48	69.50	100	36	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. This frequency is 13.553MHz RFID operating frequency.

EUT	Mobile Computer	Date of Test	2025-07-20
Factor	FMZB 1519B	Temp. / Humidity	25°C /66%
Polarity	Face Off	Site / Test Engineer	AC1 / Todd
Test Mode	TX-NFC 13.56MHz_Type V	Test Voltage	By Notebook PC

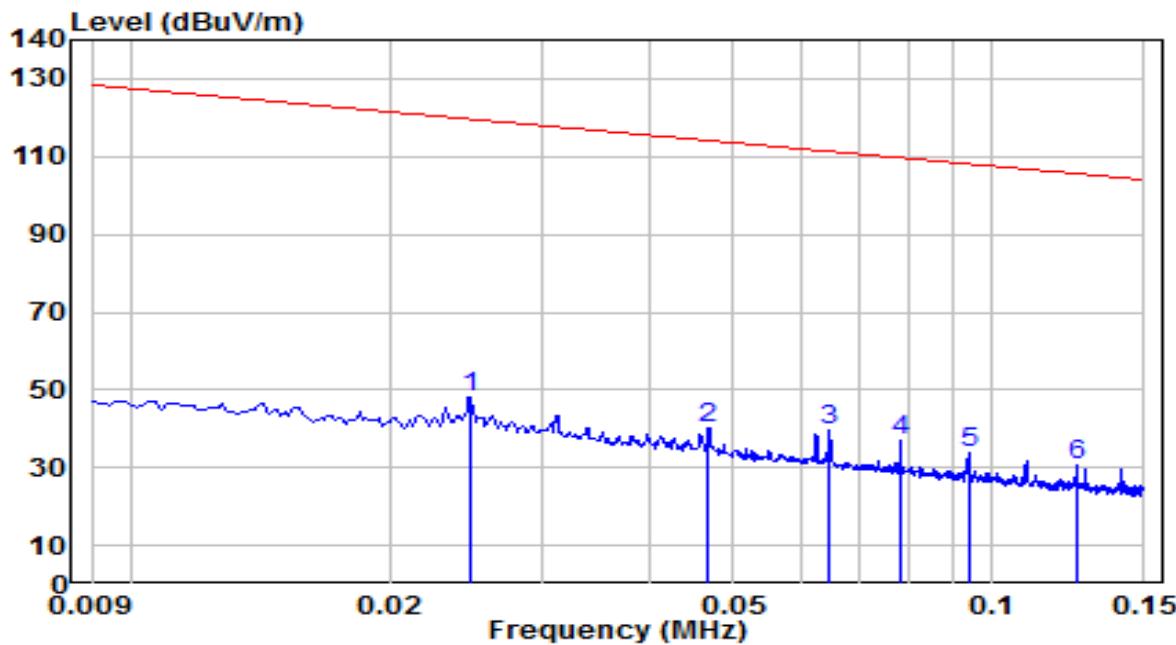


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	0.025	28.73	19.35	48.08	-71.63	119.70	100	275	Peak
2	0.047	21.08	19.14	40.22	-73.98	114.19	100	157	Peak
3 *	0.065	21.03	18.75	39.78	-71.62	111.40	100	214	Peak
4	0.078	18.50	18.48	36.98	-72.77	109.75	100	227	Peak
5	0.094	15.90	18.17	34.06	-74.10	108.16	100	4	Peak
6	0.125	12.31	18.11	30.41	-75.24	105.66	100	318	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-20
Factor	FMZB 1519B	Temp. / Humidity	25°C /66%
Polarity	Face Off	Site / Test Engineer	AC1 / Todd
Test Mode	TX-NFC 13.56MHz_Type V	Test Voltage	By Notebook PC

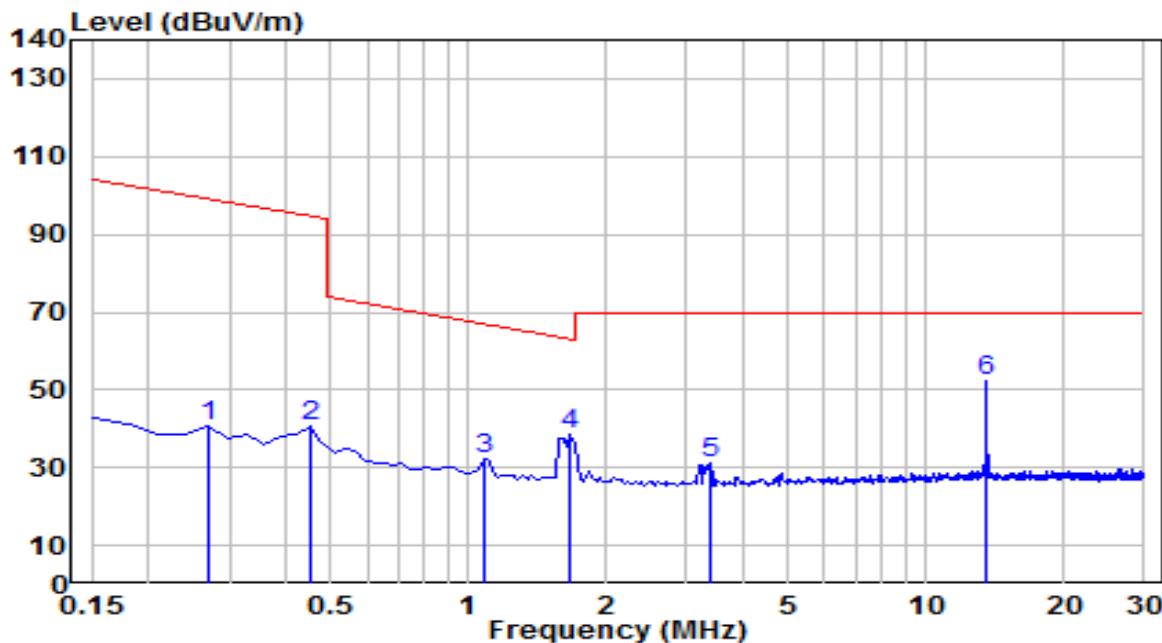


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	0.269	22.21	18.48	40.70	-58.30	98.99	100	285	Peak
2	0.449	21.99	18.65	40.64	-53.93	94.57	100	258	Peak
3	1.075	13.85	18.60	32.46	-34.53	66.99	100	263	Peak
4	1.672	20.14	18.63	38.77	-24.39	63.17	100	270	Peak
5	3.374	12.42	18.80	31.22	-38.28	69.50	100	270	Peak
6 *	13.553	30.72	21.46	52.18	-17.32	69.50	100	42	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. This frequency is 13.553MHz RFID operating frequency.

EUT	Mobile Computer	Date of Test	2025-07-20
Factor	VULB 9162	Temp. / Humidity	25°C /66%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	TX-NFC 13.56MHz_Type V	Test Voltage	By Notebook PC

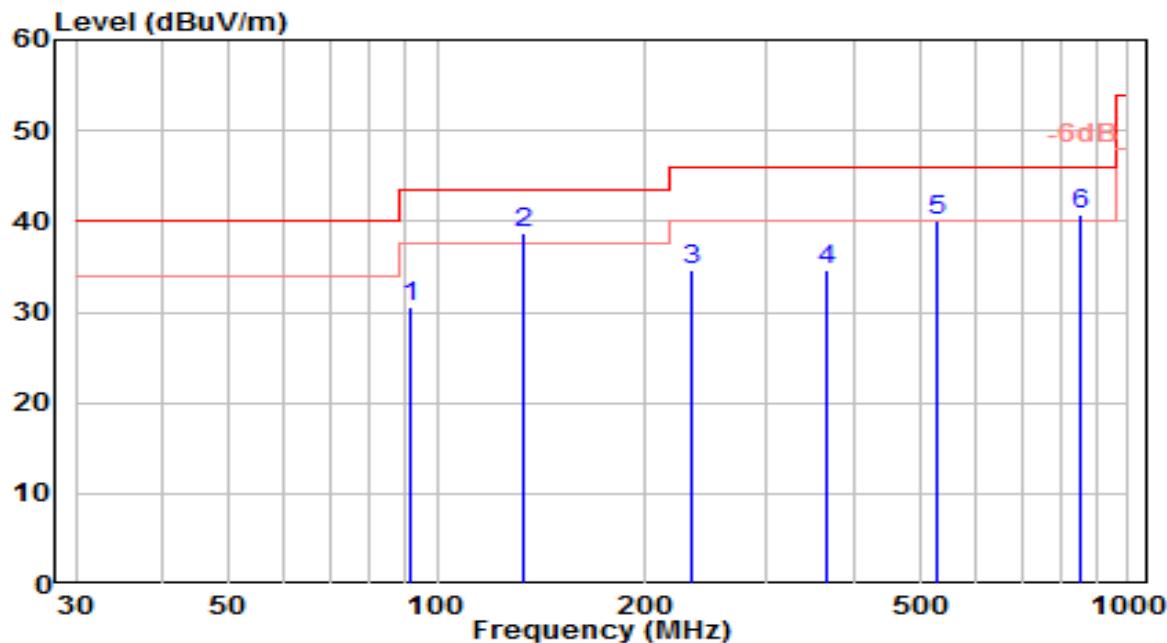


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	91.110	13.29	17.34	30.63	-12.87	43.50	150	275	QP
2 *	132.820	22.88	15.73	38.61	-4.89	43.50	150	275	QP
3	232.730	14.94	19.65	34.59	-11.41	46.00	100	305	QP
4	365.620	11.44	23.24	34.68	-11.32	46.00	100	340	QP
5	528.580	14.24	25.84	40.08	-5.92	46.00	150	310	QP
6	854.500	9.53	31.31	40.84	-5.16	46.00	150	30	QP

Note:

1. "*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-20
Factor	VULB 9162	Temp. / Humidity	25°C /66%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	TX-NFC 13.56MHz_Type V	Test Voltage	By Notebook PC

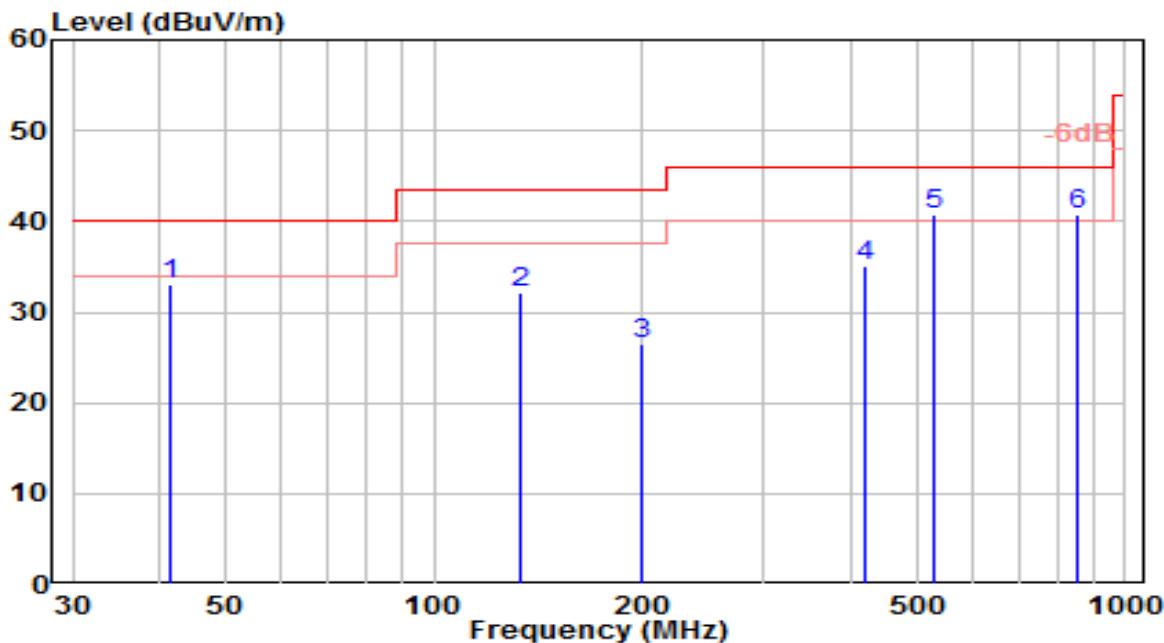

No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	41.640	12.77	20.39	33.16	-6.84	40.00	100	125	QP
2	132.820	16.43	15.73	32.16	-11.34	43.50	100	290	QP
3	199.750	7.86	18.55	26.41	-17.09	43.50	150	215	QP
4	418.970	11.03	24.00	35.02	-10.98	46.00	100	200	QP
5	528.580	14.85	25.84	40.69	-5.31	46.00	100	175	QP
6 *	854.500	9.51	31.31	40.82	-5.18	46.00	100	180	QP

Note:

1. "*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.4. 20dB Bandwidth Measurement

7.4.1. Test Limit

N/A


7.4.2. Test Procedure Used

ANSI C63.10-2013 - Section 6.9.2

7.4.3. Test Setting


1. The analyzers' automatic bandwidth measurement capability was used to perform the 20dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 20$. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediated power nulls in the fundamental emission.
2. RBW = approximately 1% ~5% of the emission bandwidth.
3. VBW $\geq 3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold.

7.4.4. Test Setup

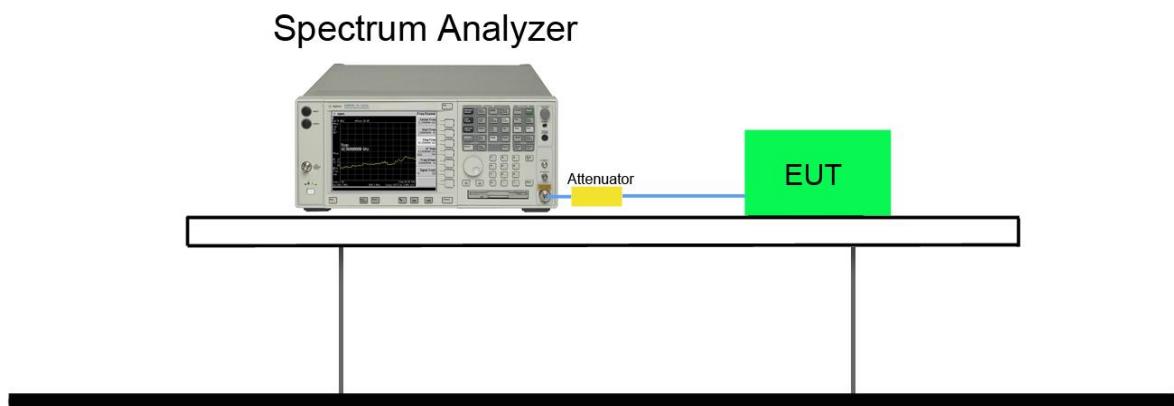

7.4.5. Test Result

Test Mode	Frequency (MHz)	20dB Bandwidth (kHz)
NFC	13.65	0.1229

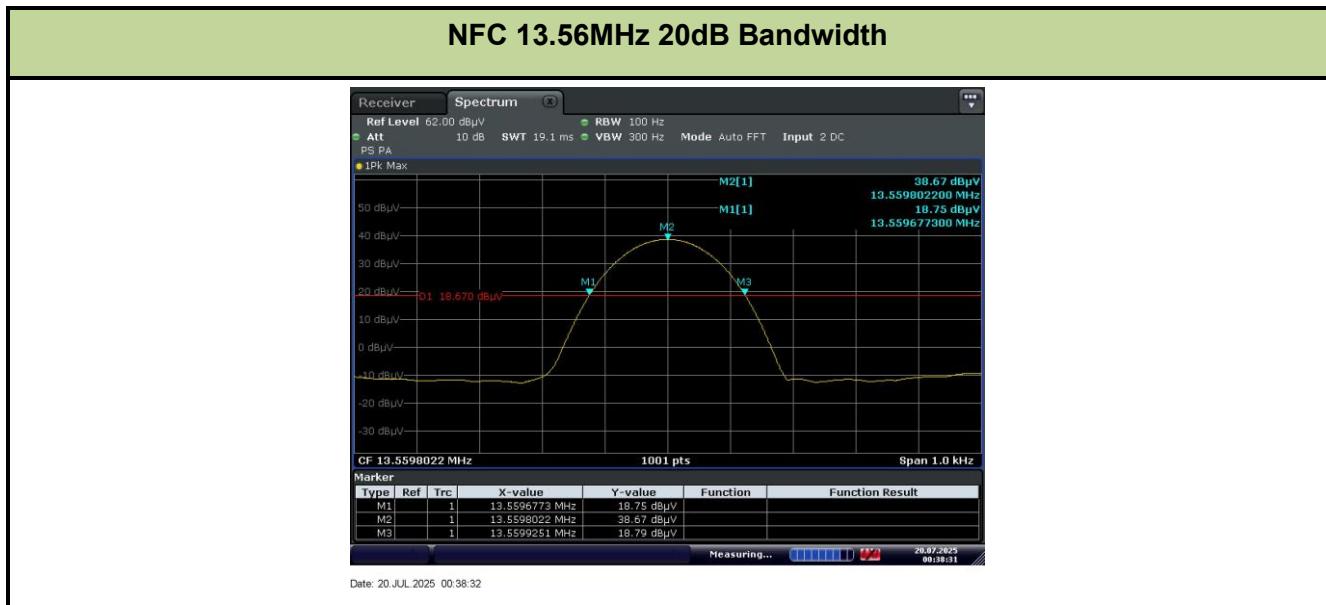

7.5. Frequency Stability Measurement

7.5.1. Test Limit

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency.

7.5.2. Test Procedure Used

Frequency Stability Under Temperature Variations:


The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to highest. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C decreased per stage until the lowest temperature reached.

Frequency Stability Under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.

7.5.3. Test Setup

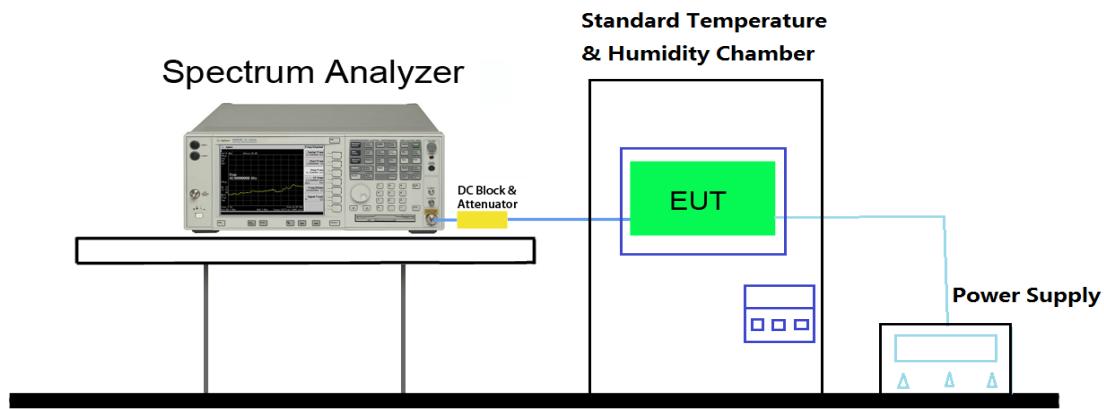

7.5.4. Test Result

Test Engineer	Fran	Temperature	-20 ~ 50°C
Test Time	2025/7/21	Relative Humidity	58%RH

RFID 13.56MHz Frequency Stability						
Temperature vs. Frequency Stability						
Voltage (%)	Power (VDC)	Temp (°C)	Frequency (MHz)	Frequency Tolerance (ppm)	Limit (ppm)	
100%	DC 3.87V	- 20	13.5597	-22.12	±100	
		- 10	13.5597	-22.12	±100	
		0	13.5597	-22.12	±100	
		+ 10	13.5597	-22.12	±100	
		+ 20 (Ref)	13.5597	-22.12	±100	
		+ 30	13.5597	-22.12	±100	
		+ 40	13.5597	-22.12	±100	
		+ 50	13.5597	-22.12	±100	
Test Result		PASS				
Voltage vs. Frequency Stability						
Voltage (%)	Power (VDC)	Temp (°C)	Frequency (MHz)	Frequency Tolerance (ppm)	Limit (ppm)	
100%	DC 3.87V	+ 20	13.5597	-22.12	±100	
115%	DC 4.45V	+ 20	13.5597	-22.12	±100	
85%	DC 3.29V	+ 20	13.5597	-22.12	±100	
Test Result		PASS				

Note:

Frequency Tolerance (ppm) = {[Measured Frequency (Hz) – Declared Frequency (Hz)] / Declared Frequency (Hz)} *10⁶.


7.6. AC Conducted Emissions Measurement

7.6.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50


Note 1: The lower limit shall apply at the transition frequencies.
Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.6.2. Test Setup

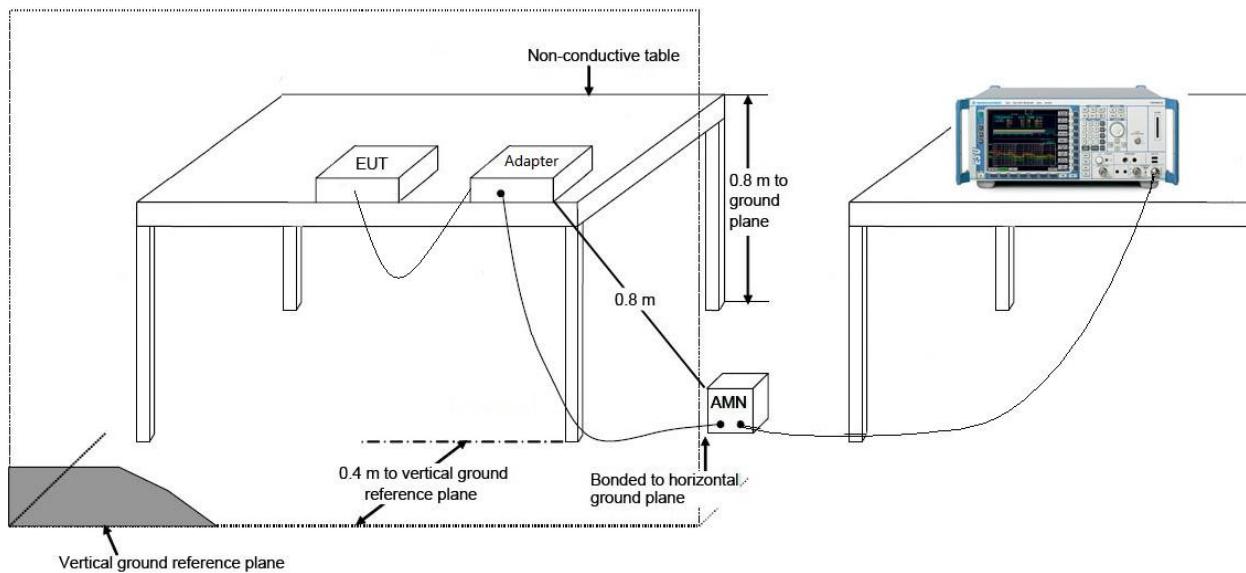

7.6.3. Test Result

EUT	Mobile Computer	Date of Test	2025-07-15
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	24°C / 54%
Polarity	Line1	Site / Test Engineer	SR2 / Ryan
Test Mode	TX_NFC_13.56MHz	Test Voltage	AC 120V/60Hz

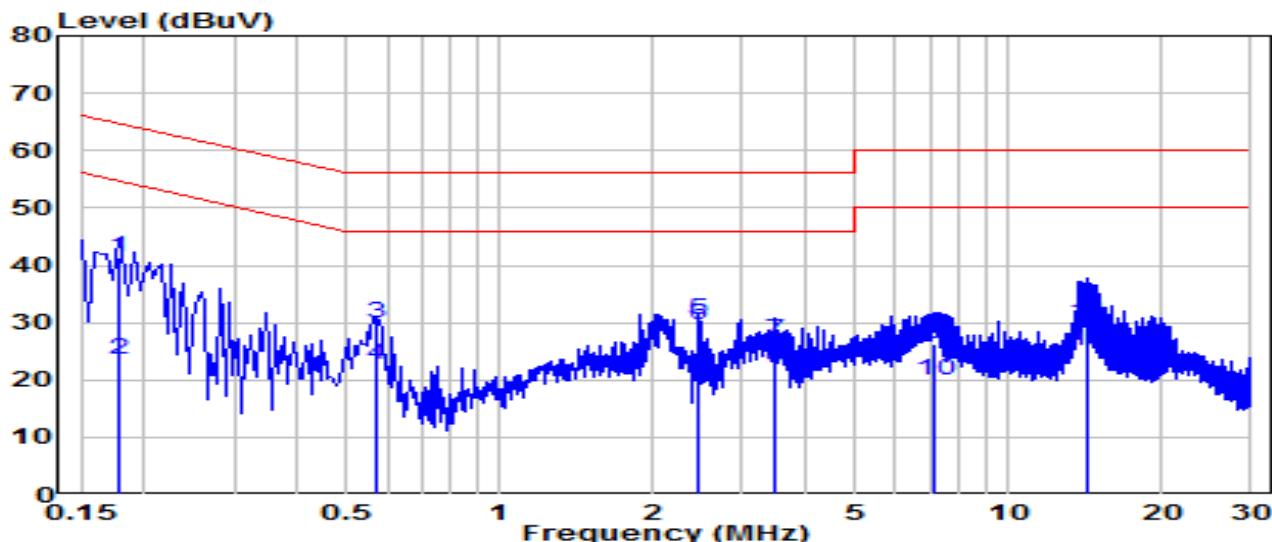


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.177	31.86	9.63	41.49	-23.14	64.63	QP
2	0.177	13.95	9.63	23.57	-31.05	54.63	Average
3	0.568	20.32	9.65	29.96	-26.04	56.00	QP
4	0.568	13.05	9.65	22.70	-23.30	46.00	Average
5 *	2.467	20.64	9.71	30.35	-25.65	56.00	QP
6 *	2.467	19.87	9.71	29.58	-16.42	46.00	Average
7	3.457	17.19	9.72	26.91	-29.09	56.00	QP
8	3.457	12.60	9.72	22.32	-23.68	46.00	Average
9	7.192	16.32	9.80	26.12	-33.88	60.00	QP
10	7.192	10.13	9.80	19.93	-30.07	50.00	Average
11	14.288	19.96	9.90	29.86	-30.14	60.00	QP
12	14.288	15.23	9.90	25.13	-24.87	50.00	Average

Note:

1. ** means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB) + Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	Mobile Computer	Date of Test	2025-07-15
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	24°C /54%
Polarity	Neutral	Site / Test Engineer	SR2 / Ryan
Test Mode	TX_NFC_13.56MHz	Test Voltage	AC 120V/60Hz

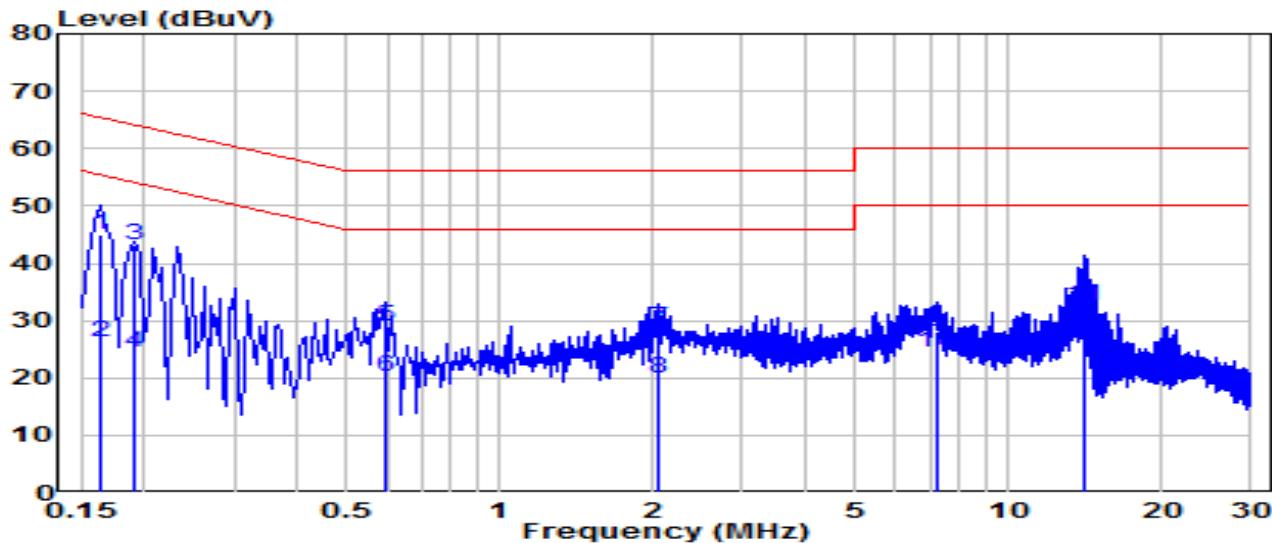

No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1 *	0.163	35.49	9.63	45.12	-20.16	65.28	QP
2 *	0.163	16.49	9.63	26.12	-29.17	55.28	Average
3	0.190	33.56	9.62	43.18	-20.84	64.01	QP
4	0.190	14.85	9.62	24.48	-29.54	54.01	Average
5	0.595	19.20	9.65	28.85	-27.15	56.00	QP
6	0.595	10.60	9.65	20.24	-25.76	46.00	Average
7	2.053	19.01	9.70	28.72	-27.28	56.00	QP
8	2.053	10.22	9.70	19.92	-26.08	46.00	Average
9	7.196	18.30	9.80	28.10	-31.90	60.00	QP
10	7.196	14.55	9.80	24.35	-25.65	50.00	Average
11	14.072	22.68	9.91	32.59	-27.41	60.00	QP
12	14.072	16.01	9.91	25.92	-24.08	50.00	Average

Note:

1. **, means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

8. CONCLUSION

The data collected relate only the item(s) tested and show that the **Mobile Computer** is in compliance with Part 15.225 of the FCC Rules.

Appendix A : Test Photograph

Refer to “2505TW0108-UT” file.

Appendix B : External Photograph

Refer to “2505TW0108-UE” file.

Appendix C : Internal Photograph

Refer to “2505TW0108-UI” file.

The End